



URS FCC TEST REPORT

Applicant Name
 SAMSUNG ELECTRONICS CO., LTD.
 #129 Samsung-Ro, Yeongtong-Gu
 Suwon-Si, Gyeonggi-Do
 16677, Korea (Republic Of)

Date of Testing
 10/04/22 – 10/20/22
Test Site/Location
 Element, Columbia, MD, USA
Document Serial No:
 1M2209010097-30.A3L

| | |
|-------------------|--------------------------------------|
| FCC ID: | A3LSMS916U |
| APPLICANT: | SAMSUNG ELECTRONICS CO., LTD. |

DUT Type: Portable Handset
Application Type: Certification
FCC Rule Part(s): 47 CFR §2.1093
Model: SM-S916U
Additional Models: SM-S916U1

| Frequency Evaluated | 3 kHz ~ 10 MHz | 10 MHz ~ 6 GHz | 6 GHz ~ 110 GHz |
|-----------------------------|------------------------|----------------|------------------------|
| SAR/RF Exposure Level | < 0.01 W/kg | 0.015 W/kg | 0.234 W/m ² |
| Total Exposure Ratio | < 10% (PASS) | | |

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

RJ Ortanez
 Executive Vice President



| | | |
|---|---|--|
| FCC ID: A3LSMS916U | FCC URS (UNINTENTIONAL RADIATOR RF SOURCES) RF EXPOSURE EVALUATION | Approved by: Technical Manager |
| Document S/N: 1M2209010097-30.A3L | DUT Type: Portable Handset | Page 1 of 6 |

TABLE OF CONTENTS

1. INTRODUCTION3
2. DATA SUMMARY5

- APPENDIX A: SYSTEM VERIFICATION
- APPENDIX B: VERIFICATION PLOTS
- APPENDIX C: TEST PLOTS
- APPENDIX D: MEASUREMENT UNCERTAINTIES
- APPENDIX E: SAR TISSUE SPECIFICATION
- APPENDIX F: SAR SYSTEM VALIDATION
- APPENDIX G: TEST SETUP PHOTOGRAPHS
- APPENDIX H: CALIBRATION CERTIFICATES
- APPENDIX I: EQUIPMENT LIST

| | | |
|---|---|--|
| FCC ID: A3LSMS916U | FCC URS (UNINTENTIONAL RADIATOR RF SOURCES) RF EXPOSURE EVALUATION | Approved by: Technical Manager |
| Document S/N: 1M2209010097-30.A3L | DUT Type: Portable Handset | Page 2 of 6 |

1. INTRODUCTION

1.1. Unintentional Radiator RF Sources (URS)

An **unintentional radiator** is defined in ANSI 63.4 as “A device that generates radio-frequency (RF) energy for use within the device or that sends RF signals by conduction to associate equipment via connecting wiring, but that is not intended to emit RF energy by radiation or induction.”

Unintentional radiators **shall be FCC authorized prior to the “initiation of marketing, pursuant to the procedures for certification or Supplier’s Declaration of Conformity (SDoC)”** according to 47CFR 15.101.

A **digital device** is defined in ANSI C63.4 as “an unintentional radiator (device or system) that uses digital techniques and generates and uses timing signals or pulses at a rate in excess of 9000 pulses (cycles) per second, inclusive of telephone equipment that uses digital techniques or any device or system that generates and uses radio-frequency (RF) energy for the purpose of performing data processing functions, such as electronic computations, operations, transformations, recording, filing, sorting, storage, retrieval, or transfer.”

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.


Per the **April 2022 TCB Workshop Unintentional Radiator Compliance Policy** (page 33), “a conservative estimate of the total emission power (integrated over the spectrum, as required) shall be provided via well-supported documentation showing analytical/numerical models and/or measurements.”

If the Total Exposure Ratio (TER) \leq 10% of the FCC limit, no further evaluation for URS is needed. Otherwise, the term shall be added to the contribution of the intentional radiators in the RF Exposure evaluation of the product.

1.2. URS Measurement Methodology

To cover all unintentional radiations, three different near field exposure probes were used to capture the electromagnetic emission from a digital device.

Unintentional Radiation (RF Exposure Plan)

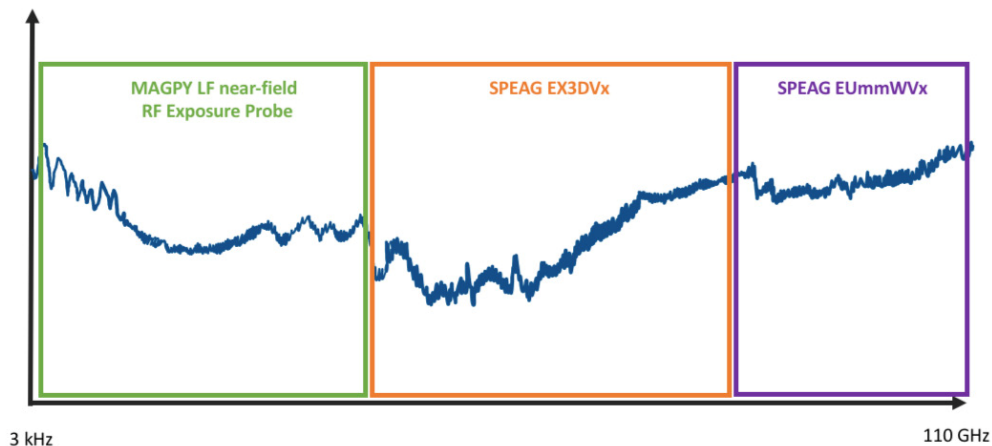

| | | |
|--------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMS916U | FCC URS (UNINTENTIONAL RADIATOR RF SOURCES) RF EXPOSURE EVALUATION | Approved by: Technical Manager |
| Document S/N: 1M2209010097-30.A3L | DUT Type: Portable Handset | Page 3 of 6 |

Per the System manufacturer’s recommendation, the following settings were configured for the measurement system to produce a conservative measurement over three broad frequency ranges.

- MAPGy:
 - scans were performed at the frequencies within 3dB of the spectral power peak

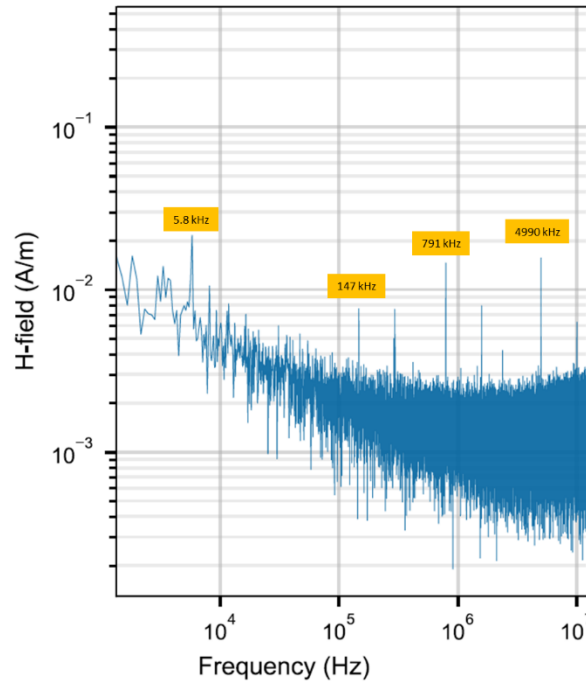


Figure 1-1
Peak Spectrum using MAGPy (tested frequencies are labeled)

- SAR:
 - SAR was measured with the probe configured with the 5.85 GHz ConvF
- mmWave:
 - psPD evaluation used the resolution and settings for PD measurement at 6 GHz

| | | |
|--------------------------------------|---|--|
| FCC ID: A3LSMS916U | FCC URS (UNINTENTIONAL RADIATOR RF SOURCES) RF EXPOSURE EVALUATION | Approved by: Technical Manager |
| Document S/N: 1M2209010097-30.A3L | DUT Type: Portable Handset | Page 4 of 6 |

2. DATA SUMMARY

2.1. 3 kHz ~ 10 MHz SAR URS Test Result

Table 2.1
< 10 MHz Unintentional Radiator SAR

| MEASUREMENT RESULTS | | | | | | |
|---|---------------|--------------|---|------|----------|--------|
| FREQUENCY | Mode | Spacing (mm) | Device Serial Number | Side | SAR (1g) | Plot # |
| kHz | | | | | (W/kg) | |
| 5.8 | Unintentional | 0 | VJ2676M | Back | 0.000001 | C1 |
| 147.0 | Unintentional | 0 | VJ2676M | Back | 0.000001 | C2 |
| 791.3 | Unintentional | 0 | VJ2676M | Back | 0.000001 | C3 |
| 4990.0 | Unintentional | 0 | VJ2676M | Back | 0.000001 | C4 |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population | | | Body 1.6 W/kg (mW/g) averaged over 1 gram | | | |

2.2. 10 MHz ~ 6000 MHz SAR URS Test Result

Table 2.2
10 – 6000 MHz Unintentional Radiator SAR

| MEASUREMENT RESULTS | | | | | | |
|---|---------------|--------------|---|------|----------|--------|
| FREQUENCY | Mode | Spacing (mm) | Device Serial Number | Side | SAR (1g) | Plot # |
| MHz | | | | | (W/kg) | |
| 10 - 6000 | Unintentional | 0 | VJ2676M | Back | 0.015 | C5 |
| ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population | | | Body 1.6 W/kg (mW/g) averaged over 1 gram | | | |

| | | |
|--------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMS916U | FCC URS (UNINTENTIONAL RADIATOR RF SOURCES) RF EXPOSURE EVALUATION | Approved by: Technical Manager |
| Document S/N: 1M2209010097-30.A3L | DUT Type: Portable Handset | Page 5 of 6 |

2.3. 6 GHz ~ 110 GHz Power Density Result

Table 2.3
6 - 110 GHz Unintentional Radiator Power Density

| MEASUREMENT RESULTS | | | | | | | | |
|---|---------------|--------------|--|------|---------------|---------------------------------|--------------------------------|--------|
| Frequency (GHz) | Mode | Spacing (mm) | DUT Serial Number | Side | Grid Step (λ) | Normal psPD (W/m ²) | Total psPD (W/m ²) | Plot # |
| 6 - 110 | Unintentional | 2 | VJ2676M | Back | 0.25 | 0.227 | 0.234 | C6 |
| 47 CFR §1.1310 - SAFETY LIMIT Spatial Average Uncontrolled Exposure / General Population | | | Power Density 10 W/m² averaged over 4 cm² | | | | | |

Test Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D04 v01
2. Batteries are fully charged at the beginning of the measurements. The DUT was connected to a wall charger via the USB-C port.
3. For the SAR test covering the 4 MHz-6 GHz range, the liquid tissue depth was at least 15.0 cm.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. Power density was calculated by repeated E-field measurements on two measurement planes separated by λ/4.
6. Per April 2022 TCB Workshop Notes, for all $f \leq 6$ GHz, SAR limits in § 1.1310(c) can always be applied if available, in place of MPE limits
7. For frequencies 10MHz and below, the MAGPy system was used for testing. The MAGPy system uses a 3-axis H-field sensor comprised of 3 concentric loops to measure the H-field amplitude and gradient. A 3-D scan is used with an MQS solver to compute SAR values within the measured volume.

2.4. Total Exposure Ratio

Table 2.4
Unintentional Radiator Total Exposure Ratio

| Tx Frequency Range (MHz) | Tx Frequency (MHz) | SAR | PD | TER |
|--------------------------|--------------------|-----------|--------------------------|-------|
| | | 1g (W/kg) | psPD (W/m ²) | |
| 0.1 - 10 | 0.0058 | 0.000001 | N/A | 0.033 |
| | 0.1470 | 0.000001 | | |
| | 0.7913 | 0.000001 | | |
| | 4.9900 | 0.000001 | | |
| 10 - 6000 | | 0.015 | N/A | |
| 6000 - 110000 | | N/A | 0.234 | |
| FCC Limit | | 1.6 | 10 | |

| | | |
|--------------------------------------|---|-----------------------------------|
| FCC ID: A3LSMS916U | FCC URS (UNINTENTIONAL RADIATOR RF SOURCES) RF EXPOSURE EVALUATION | Approved by: Technical Manager |
| Document S/N: 1M2209010097-30.A3L | DUT Type: Portable Handset | Page 6 of 6 |