



SAR EVALUATION REPORT

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

12/13/22 – 01/18/2023

Test Site/Location:

Element, Columbia, MD, USA

Document Serial No.:

1M2212080137-20.A3L

FCC ID:

A3LSMS918JPN

APPLICANT:

SAMSUNG ELECTRONICS CO., LTD.

DUT Type:

Portable Handset

Application Type:

Certification

FCC Rule Part(s):

CFR §2.1093

Model(s):

SC-52D, SCG20

Equipment Class	Band & Mode	Tx Frequency	SAR			
			1g Head (W/kg)	1g Body-Worn (W/kg)	1g Hotspot (W/kg)	10g Phablet (W/kg)
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.20	0.31	1.14	N/A
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	< 0.1	0.19	0.97	1.42
PCE	UMTS 850	826.40 - 846.60 MHz	0.26	0.42	0.94	N/A
PCE	LTE Band 12	699.7 - 715.3 MHz	0.14	0.24	0.37	N/A
PCE	LTE Band 13	779.5 - 784.5 MHz	0.20	0.29	0.65	N/A
PCE	LTE Band 26 (Cell)	814.7 - 848.3 MHz	0.25	0.45	0.98	N/A
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 66 (AWS)	1710.7 - 1779.3 MHz	0.15	0.23	0.88	1.90
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	0.13	0.21	1.03	1.72
PCE	LTE Band 41	2498.5 - 2687.5 MHz	< 0.1	0.17	0.70	1.79
PCE	NR Band n5 (Cell)	826.5 - 846.5 MHz	0.19	0.38	0.98	N/A
PCE	NR Band n41	2501.01 - 2685 MHz	0.78	0.13	0.51	2.01
DTS	2.4 GHz WLAN	2412 - 2472 MHz	0.15	0.12	0.20	N/A
NII	U-NII-1	5180 - 5240 MHz	N/A	N/A	N/A	N/A
NII	U-NII-2A	5260 - 5320 MHz	0.28*	0.16*	N/A	1.26*
NII	U-NII-2C	5500 - 5720 MHz	0.34*	0.17*	N/A	1.37*
NII	U-NII-3	5745 - 5825 MHz	0.39*	0.16*	0.28*	N/A
NII	U-NII-4	5845 - 5885 MHz	0.60*	0.17*	N/A	1.01*
DSS/DTS	Bluetooth	2402 - 2480 MHz	0.14	< 0.1	0.19	N/A
DXX	NFC	13.56 MHz	N/A	N/A	N/A	< 0.1
Simultaneous SAR per KDB 690783 D01v01r03:			1.39	0.66	1.48	2.34

* Note: * SAR values represent RF exposure during MIMO operations.

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.9 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

RJ Ortanez
Executive Vice President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfai.info.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 1 of 95

REV 22.0
03/30/2022

TABLE OF CONTENTS

1	DEVICE UNDER TEST	3
2	LTE AND NR INFORMATION	19
3	INTRODUCTION	21
4	DOSIMETRIC ASSESSMENT	22
5	DEFINITION OF REFERENCE POINTS.....	23
6	TEST CONFIGURATION POSITIONS.....	24
7	RF EXPOSURE LIMITS	28
8	FCC MEASUREMENT PROCEDURES.....	29
9	RF CONDUCTED POWERS.....	35
10	SYSTEM VERIFICATION.....	62
11	SAR DATA SUMMARY	68
12	SAR MEASUREMENT VARIABILITY	90
13	EQUIPMENT LIST.....	91
14	MEASUREMENT UNCERTAINTIES.....	92
15	CONCLUSION.....	93
16	REFERENCES	94
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: MULTI-TX AND ANTENNA SAR CONSIDERATIONS		
APPENDIX F: POWER REDUCTION VERIFICATION		
APPENDIX G: SAR SYSTEM VALIDATION		
APPENDIX H: LTE AND NR LOWER BANDWIDTH RF CONDUCTED POWERS		
APPENDIX I: DOWNLINK LTE CA RF CONDUCTED POWERS		
APPENDIX J: 802.11ax RU SAR EXCLUSION		
APPENDIX K: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 2 of 95

REV 22.0
03/30/2022

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 26 (Cell)	Voice/Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Voice/Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
NR Band n5 (Cell)	Data	826.5 - 846.5 MHz
NR Band n41	Data	2501.01 - 2685 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2472 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
U-NII-4	Voice/Data	5845 - 5885 MHz
U-NII-5	Voice/Data	5935 - 6415 MHz
U-NII-6	Voice/Data	6435 - 6515 MHz
U-NII-7	Voice/Data	6535 - 6875 MHz
U-NII-8	Voice/Data	6895 - 7115 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz
UWB	Data	6489.6 - 7987.2 MHz

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 3 of 95

REV 22.0
03/30/2022

1.2 Time-Averaging Algorithm for RF Exposure Compliance

This Device is enabled with the Qualcomm® Smart Transmit Gen1 feature. This feature performs time averaging algorithm in real time to control and manage transmitting power and ensure the time-averaged RF exposure is in compliance with FCC requirements all the time. Refer to Compliance Summary document for detailed description of Qualcomm® Smart Transmit feature (report SN could be found in Section 1.11 – Bibliography).

Note that WLAN operations are not enabled with Smart Transmit.

The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR_{design_target} , below the predefined time-averaged power limit (i.e., P_{limit} for sub-6 radio), for each characterized technology and band (see RF Exposure Part 0 Test Report, report SN could be found in Section 1.11 - Bibliography).

Smart Transmit allows the device to transmit at higher power instantaneously, as high as P_{max} , when needed, but enforces power limiting to maintain time-averaged transmit power to P_{limit} . Below table shows P_{limit} EFS settings and maximum tune up output power P_{max} configured for this EUT for various transmit conditions (Device State Index DSI). Note that the device uncertainty for sub-6GHz WWAN is 1.0dB for this EUT.

Exposure Scenario		Body-Worn	Phablet Max	Phablet Reduced	Head	Hotspot	Earjack	Maximum Tune-Up Output Power*
Averaging Volume		1g	10g	10g	1g	1g	10g	
Spacing		15 mm	8 mm, 6 mm, 12 mm, 0 mm	0 mm	0 mm	10 mm	0 mm	
DSI		0	0	1	2	3	4	
Technology/Band	Antenna						Pmax	
GSM 850	A	28.9	26.9	30.8	25.5	26.9	25.3	
GSM 1900	A	18.8	18.8	33.0	18.8	18.8	22.1	
UMTS 850	A	28.7	26.4	30.9	25.3	26.4	24.0	
LTE Band 12	A	27.6	26.1	33.9	26.1	26.1	24.5	
LTE Band 13	A	28.3	25.9	32.6	25.9	25.9	24.5	
LTE Band 26/5 (Cell)	A	27.0	26.4	31.6	25.5	26.4	24.5	
LTE Band 66/4 (AWS)	A	19.0	19.0	32.9	19.0	19.0	23.5	
LTE Band 2 (PCS)	A	19.0	19.0	33.1	19.0	19.0	23.5	
LTE Band 41	B	19.0	19.0	36.7	19.0	19.0	22.0	
NR Band n5 (Cell)	A	27.7	26.6	32.7	25.5	26.6	24.5	
NR Band n41	F	18.0	18.0	16.0	18.0	18.0	24.0	

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 4 of 95



*Note all P_{limit} EFS and maximum tune up output power P_{max} levels entered in above Table correspond to average power levels after accounting for duty cycle in the case of TDD modulation schemes (e.g. GSM and LTE TDD).

*Maximum tune up output power P_{max} is used to configure EUT during RF tune up procedure. The maximum allowed output power is equal to maximum Tune up output power + 1dB device design uncertainty.

The maximum time-averaged output power (dBm) for any Sub6 WWAN technology, band, and DSI = minimum of " P_{limit} EFS" and "Maximum tune up output power P_{max} " + 1dB device uncertainty. SAR values in this report were scaled to this maximum time-averaged output power to determine compliance per KDB Publication 447498 D04v01.

The purpose of this report (Part 1 test) is to demonstrate that the EUT meets FCC SAR limits when transmitting in static transmission scenario at maximum allowable time-averaged power levels.

Measurement Condition: All conducted power and SAR measurements in this report (Part 1 test) were performed by setting *Reserve_power_margin* (Smart Transmit EFS entry) to 0dB.

1.3 Power Reduction for SAR

This device uses an independent fixed level power reduction mechanism for WLAN/BT operations during voice or VoIP held to ear scenarios and when 5G NR is active. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 5 of 95

REV 22.0
03/30/2022



1.4 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D04v01.

Note: Targets for 802.11ax RU operations can be found in 802.11ax RU SAR Exclusion Appendix.

1.4.1 Licensed Output Power

GSM/GPRS/EDGE 850										
Power Level		Voice (in dBm)	Data - Burst Average GMSK (in dBm)				Data - Burst Average 8-PSK (in dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
Pmax	Max Allowed Power	33.0	33.0	32.5	30.5	28.5	27.5	26.0	24.0	23.0
	Nominal	32.0	32.0	31.5	29.5	27.5	26.5	25.0	23.0	22.0
DSI = 0 (Body-Worn or Phablet Max)	Max Allowed Power	33.0	33.0	32.5	30.5	28.5	27.5	26.0	24.0	23.0
	Nominal	32.0	32.0	31.5	29.5	27.5	26.5	25.0	23.0	22.0
DSI = 1 (Phablet Reduced)	Max Allowed Power	33.0	33.0	32.5	30.5	28.5	27.5	26.0	24.0	23.0
	Nominal	32.0	32.0	31.5	29.5	27.5	26.5	25.0	23.0	22.0
DSI = 2 (Head)	Max Allowed Power	33.0	33.0	32.5	30.5	28.5	27.5	26.0	24.0	23.0
	Nominal	32.0	32.0	31.5	29.5	27.5	26.5	25.0	23.0	22.0
DSI = 3 (Hotspot)	Max Allowed Power	N/A	33.0	32.5	30.5	28.5	27.5	26.0	24.0	23.0
	Nominal	N/A	32.0	31.5	29.5	27.5	26.5	25.0	23.0	22.0
DSI = 4 (Earjack)	Max Allowed Power	33.0	33.0	32.5	30.5	28.5	27.5	26.0	24.0	23.0
	Nominal	32.0	32.0	31.5	29.5	27.5	26.5	25.0	23.0	22.0
GSM/GPRS/EDGE 1900										
Power Level		Voice (in dBm)	Data - Burst Average GMSK (in dBm)				Data - Burst Average 8-PSK (in dBm)			
		1 TX Slot	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots	1 TX Slots	2 TX Slots	3 TX Slots	4 TX Slots
Pmax	Max Allowed Power	30.0	30.0	29.0	27.5	25.5	26.5	25.0	23.0	22.0
	Nominal	29.0	29.0	28.0	26.5	24.5	25.5	24.0	22.0	21.0
DSI = 0 (Body-Worn or Phablet Max)	Max Allowed Power	29.0	29.0	26.0	24.2	23.0	26.5	25.0	23.0	22.0
	Nominal	28.0	28.0	25.0	23.2	22.0	25.5	24.0	22.0	21.0
DSI = 1 (Phablet Reduced)	Max Allowed Power	29.0	29.0	26.0	24.2	23.0	26.5	25.0	23.0	22.0
	Nominal	28.0	28.0	25.0	23.2	22.0	25.5	24.0	22.0	21.0
DSI = 2 (Head)	Max Allowed Power	30.0	30.0	29.0	27.5	25.5	26.5	25.0	23.0	22.0
	Nominal	29.0	29.0	28.0	26.5	24.5	25.5	24.0	22.0	21.0
DSI = 3 (Hotspot)	Max Allowed Power	N/A	29.0	26.0	24.2	23.0	26.5	25.0	23.0	22.0
	Nominal	N/A	28.0	25.0	23.2	22.0	25.5	24.0	22.0	21.0
DSI = 4 (Earjack)	Max Allowed Power	29.0	29.0	26.0	24.2	23.0	26.5	25.0	23.0	22.0
	Nominal	28.0	28.0	25.0	23.2	22.0	25.5	24.0	22.0	21.0

For GSM, the above powers listed are GSM burst average values.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 6 of 95

REV 22.0
03/30/2022

UMTS Band 5 (850 MHz)				
Power Level		Modulated Average Output Power		
		3GPP WCDMA Rel 99	3GPP HSDPA Rel 5	3GPP HSUPA Rel 6
Pmax	Max Allowed Power	25.0	24.0	24.0
	Nominal	24.0	23.0	23.0
DSI = 0 (Body-Worn or Phablet Max)	Max Allowed Power	25.0	24.0	24.0
	Nominal	24.0	23.0	23.0
DSI = 1 (Phablet Reduced)	Max Allowed Power	25.0	24.0	24.0
	Nominal	24.0	23.0	23.0
DSI = 2 (Head)	Max Allowed Power	25.0	24.0	24.0
	Nominal	24.0	23.0	23.0
DSI = 3 (Hotspot)	Max Allowed Power	25.0	24.0	24.0
	Nominal	24.0	23.0	23.0
DSI = 4 (Earjack)	Max Allowed Power	25.0	24.0	24.0
	Nominal	24.0	23.0	23.0

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 7 of 95

Mode / Band	Antenna		Modulated Average Output Power (in dBm)					
			Pmax	DSI = 0 (Body-Worn or Phablet Max)	DSI = 1 (Phablet Reduced)	DSI = 2 (Head)	DSI = 3 (Hotspot)	DSI = 4 (Earjack)
LTE Band 12	A	Max Allowed Power	25.5	25.5	25.5	25.5	25.5	25.5
		Nominal	24.5	24.5	24.5	24.5	24.5	24.5
LTE Band 13	A	Max Allowed Power	25.5	25.5	25.5	25.5	25.5	25.5
		Nominal	24.5	24.5	24.5	24.5	24.5	24.5
LTE Band 26 (Cell)	A	Max Allowed Power	25.5	25.5	25.5	25.5	25.5	25.5
		Nominal	24.5	24.5	24.5	24.5	24.5	24.5
LTE Band 5 (Cell)	A	Max Allowed Power	25.5	25.5	25.5	25.5	25.5	25.5
		Nominal	24.5	24.5	24.5	24.5	24.5	24.5
LTE Band 66 (AWS)	A	Max Allowed Power	24.5	20.0	20.0	24.5	20.0	20.0
		Nominal	23.5	19.0	19.0	23.5	19.0	19.0
LTE Band 4 (AWS)	A	Max Allowed Power	24.5	20.0	20.0	24.5	20.0	20.0
		Nominal	23.5	19.0	19.0	23.5	19.0	19.0
LTE Band 2 (PCS)	A	Max Allowed Power	24.5	20.0	20.0	24.5	20.0	20.0
		Nominal	23.5	19.0	19.0	23.5	19.0	19.0
LTE Band 41	B	Max Allowed Power	25.0	22.0	22.0	25.0	22.0	22.0
		Nominal	24.0	21.0	21.0	24.0	21.0	21.0

Mode / Band	Antenna		Modulated Average Output Power (in dBm)					
			Pmax	DSI = 0 (Body-Worn or Phablet Max)	DSI = 1 (Phablet Reduced)	DSI = 2 (Head)	DSI = 3 (Hotspot)	DSI = 4 (Earjack)
NR Band n5 (Cell)	A	Max Allowed Power	25.5	25.5	25.5	25.5	25.5	25.5
		Nominal	24.5	24.5	24.5	24.5	24.5	24.5
NR Band n41	F	Max Allowed Power	25.0	19.0	19.0	17.0	19.0	19.0
		Nominal	24.0	18.0	18.0	16.0	18.0	18.0

For LTE TDD and NR TDD, the above powers listed are TDD burst average values.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 8 of 95



1.4.2 2.4 GHz Maximum WLAN Output Power

Mode	Band	IEEE 802.11 (in dBm)															
		SISO								MIMO							
		Antenna 2															
		b		g		n		ax (SU)		^b CDD + STBC		^g (CDD + STBC)		ⁿ (CDD+STBC, SDM)		^{ax} (SU) (CDD+STBC, SDM)	
Maximum / Nominal Power		Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.
2.4 GHz WIFI	2.45 GHz	20.0	19.0	18.0	17.0	18.0	17.0	17.0	16.0	23.0	22.0	21.0	20.0	21.0	20.0	20.0	19.0
		Ch 12: 6.0	5.0	Ch 12: 6.0	5.0	Ch 12: 6.0	5.0	Ch 12: 6.0	5.0	Ch 12: 9.0	8.0	Ch 12: 9.0	8.0	Ch 12: 9.0	8.0	Ch 12: 9.0	8.0
		Ch 13: 0.0	-1.0	Ch 13: 0.0	-1.0	Ch 13: 0.0	-1.0	Ch 13: 0.0	-1.0	Ch 13: 3.0	2.0	Ch 13: 3.0	2.0	Ch 13: 3.0	2.0	Ch 13: 3.0	2.0

1.4.3 2.4 GHz Reduced WLAN Output Powers

The below table is applicable in the following conditions:

- Simultaneous conditions with 5/6 GHz WLAN and/or 5G NR
- RCV Active
- RCV Active during simultaneous conditions with 5/6 GHz WLAN and/or 5G NR

Mode	Band	IEEE 802.11 (in dBm)															
		SISO								MIMO							
		Antenna 2															
		b		g		n		ax (SU)		^b CDD + STBC		^g (CDD + STBC)		ⁿ (CDD+STBC, SDM)		^{ax} (SU) (CDD+STBC, SDM)	
Maximum / Nominal Power		Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.
2.4 GHz WIFI	2.45 GHz	14.0	13.0	14.0	13.0	14.0	13.0	14.0	13.0	17.0	16.0	17.0	16.0	17.0	16.0	17.0	16.0
		Ch 12: 6.0	5.0	Ch 12: 6.0	5.0	Ch 12: 6.0	5.0	Ch 12: 6.0	5.0	Ch 12: 9.0	8.0	Ch 12: 9.0	8.0	Ch 12: 9.0	8.0	Ch 12: 9.0	8.0
		Ch 13: 0.0	-1.0	Ch 13: 0.0	-1.0	Ch 13: 0.0	-1.0	Ch 13: 0.0	-1.0	Ch 13: 3.0	2.0	Ch 13: 3.0	2.0	Ch 13: 3.0	2.0	Ch 13: 3.0	2.0

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 9 of 95

REV 22.0
03/30/2022

1.4.4 5 GHz Maximum WLAN Output Power

Mode	Band	IEEE 802.11 (in dBm)							
		MIMO							
		a (CDD + STBC)		n (CDD+STBC, SDM)		ac (CDD+STBC, SDM)		ax (SU) (CDD+STBC, SDM)	
Maximum / Nominal Power		Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.
5 GHz WIFI (20MHz BW)	UNII-1	20.5	19.5	20.5	19.5	20.5	19.5	20.5	19.5
	UNII-2A	20.5	19.5	20.5	19.5	20.5	19.5	20.5	19.5
	UNII-2C	20.5	19.5	20.5	19.5	20.5	19.5	20.5	19.5
	UNII-3	20.5	19.5	20.5	19.5	20.5	19.5	20.5	19.5
	UNII-4	20.5	19.5	20.5	19.5	20.5	19.5	20.5	19.5
5 GHz WIFI (40MHz BW)	UNII-1			20.0	19.0	20.0	19.0	20.0	19.0
	UNII-2A			20.0	19.0	20.0	19.0	20.0	19.0
	UNII-2C			20.0	19.0	20.0	19.0	20.0	19.0
	UNII-3			20.0	19.0	20.0	19.0	20.0	19.0
	UNII-4			20.0	19.0	20.0	19.0	20.0	19.0
5 GHz WIFI (80MHz BW)	UNII-1					19.0	18.0	19.0	18.0
	UNII-2A					19.0	18.0	19.0	18.0
	UNII-2C					19.0	18.0	19.0	18.0
	UNII-3					19.0	18.0	19.0	18.0
	UNII-4					19.0	18.0	19.0	18.0
5 GHz WIFI (160MHz BW)	UNII-1/2A					19.0	18.0	19.0	18.0
	UNII-2C					19.0	18.0	19.0	18.0
	UNII-3/4					19.0	18.0	19.0	18.0

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 10 of 95

1.4.5 5 GHz Reduced WLAN Output Powers

The below table is applicable in the following conditions:

- Simultaneous conditions with 2.4 GHz WLAN and/or 5G NR
- RCV Active
- RCV Active during simultaneous conditions with 2.4 GHz WLAN and/or 5G NR

Mode	Band	IEEE 802.11 (in dBm)							
		MIMO							
		a (CDD + STBC)		n (CDD+STBC, SDM)		ac (CDD+STBC, SDM)		ax (SU) (CDD+STBC, SDM)	
Maximum / Nominal Power		Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.
5 GHz WIFI (20MHz BW)	UNII-1	16.0	15.0	16.0	15.0	16.0	15.0	16.0	15.0
	UNII-2A	16.0	15.0	16.0	15.0	16.0	15.0	16.0	15.0
	UNII-2C	16.0	15.0	16.0	15.0	16.0	15.0	16.0	15.0
	UNII-3	16.0	15.0	16.0	15.0	16.0	15.0	16.0	15.0
	UNII-4	16.0	15.0	16.0	15.0	16.0	15.0	16.0	15.0
5 GHz WIFI (40MHz BW)	UNII-1			16.0	15.0	16.0	15.0	16.0	15.0
	UNII-2A			16.0	15.0	16.0	15.0	16.0	15.0
	UNII-2C			16.0	15.0	16.0	15.0	16.0	15.0
	UNII-3			16.0	15.0	16.0	15.0	16.0	15.0
	UNII-4			16.0	15.0	16.0	15.0	16.0	15.0
5 GHz WIFI (80MHz BW)	UNII-1					16.0	15.0	16.0	15.0
	UNII-2A					16.0	15.0	16.0	15.0
	UNII-2C					16.0	15.0	16.0	15.0
	UNII-3					16.0	15.0	16.0	15.0
	UNII-4					16.0	15.0	16.0	15.0
5 GHz WIFI (160MHz BW)	UNII-1/2A					16.0	15.0	16.0	15.0
	UNII-2C					16.0	15.0	16.0	15.0
	UNII-3/4					16.0	15.0	16.0	15.0

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 11 of 95

1.4.6 2.4 GHz Maximum Bluetooth Output Power

Mode	Single Antenna				Dual Antenna	
	Antenna 1		Antenna 2		Maximum	Nominal
	Maximum	Nominal	Maximum	Nominal		
Bluetooth (in dBm)	18.0	17.0	18.0	17.0	17.5	16.5
Bluetooth EDR (in dBm)	15.0	14.0	15.0	14.0	14.5	13.5
Bluetooth LE 1Mbps/2Mbps (in dBm)	12.0	11.0	10.0	9.0		
Bluetooth LE 125/500 kbps (in dBm)	12.0	11.0	10.0	9.0		

1.4.7 2.4 GHz Reduced Bluetooth Output Power

The below table is applicable in the following conditions:

- RCV active

Mode	Single Antenna				Dual Antenna	
	Antenna 1		Antenna 2		Maximum	Nominal
	Maximum	Nominal	Maximum	Nominal		
Bluetooth (in dBm)	12.5	11.5	12.5	11.5	12.0	11.0
Bluetooth EDR (in dBm)	12.5	11.5	12.5	11.5	12.0	11.0
Bluetooth LE 1Mbps/2Mbps (in dBm)	12.0	11.0	10.0	9.0		
Bluetooth LE 125/500 kbps (in dBm)	12.0	11.0	10.0	9.0		

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 12 of 95

1.5 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in DUT Antenna Diagram & SAR Test Setup Photographs Appendix. Since the display diagonal dimension of this device is > 150 mm and <200 mm, it is considered a “phablet.” Exact antenna dimensions and separation distances are shown in the Technical Descriptions in the FCC filing.

**Table 1-1
Device Edges/Sides for SAR Testing**

Device Sides/Edges for SAR Testing						
Mode	Back	Front	Top	Bottom	Right	Left
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	Yes	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	Yes
LTE Band 12	Yes	Yes	No	Yes	Yes	Yes
LTE Band 13	Yes	Yes	No	Yes	Yes	Yes
LTE Band 26 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 66 (AWS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 41	Yes	Yes	No	Yes	Yes	No
NR Band n5 (Cell)	Yes	Yes	No	Yes	Yes	Yes
NR Band n41 Antenna F	Yes	Yes	Yes	No	No	Yes
2.4 GHz WLAN Ant 2	Yes	Yes	Yes	No	Yes	No
2.4 GHz WLAN MIMO	Yes	Yes	Yes	No	Yes	Yes
5 GHz WLAN MIMO	Yes	Yes	Yes	No	Yes	Yes
Bluetooth Ant 1	Yes	Yes	Yes	No	No	Yes
Bluetooth Ant 2	Yes	Yes	Yes	No	Yes	No
Bluetooth MIMO	Yes	Yes	Yes	No	Yes	Yes
NFC	Yes	Yes	No	No	Yes	Yes

Note: Particular DUT edges were not required to be evaluated for wireless router SAR or phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III and FCC KDB Publication 648474 D04v01r03. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled, U-NII-1, U-NII-2A, U-NII-2C, U-NII-4, and WIFI6E operations are disabled.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 13 of 95

1.6 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in DUT Antenna Diagram & SAR Test Setup Photographs Appendix.

1.7 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D04v01, transmitters are considered to be operating simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D04v01 procedures.

**Table 1-2
Simultaneous Transmission Scenarios**

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Phablet	Notes
1	GSM voice + 2.4 GHz Bluetooth Ant 1	Yes*	Yes	N/A	Yes	* Bluetooth Tethering is considered
2	GSM voice + 2.4 GHz Bluetooth Ant 2	Yes	Yes	N/A	Yes	
3	GSM voice + 2.4 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
4	GSM voice + 5 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
5	GSM voice + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
6	GSM voice + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
7	GSM voice + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
8	GSM voice + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz WLAN Ant 2	Yes*	Yes	N/A	Yes	* Bluetooth Tethering is considered
9	GSM voice + 2.4 GHz Bluetooth MIMO	Yes	Yes	N/A	Yes	
10	GSM voice + 2.4 GHz Bluetooth Ant 1 + 5 GHz WLAN MIMO	Yes*	Yes	N/A	Yes	* Bluetooth Tethering is considered
11	GSM voice + 2.4 GHz Bluetooth Ant 1 + 6 GHz WLAN MIMO	Yes*	Yes	N/A	Yes	* Bluetooth Tethering is considered
12	GSM voice + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
13	GSM voice + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
14	GSM voice + 2.4 GHz Bluetooth MIMO + 5 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
15	GSM voice + 2.4 GHz Bluetooth MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
16	GSM voice + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz WLAN Ant 2 + 5 GHz WLAN MIMO	Yes*	Yes	N/A	Yes	* Bluetooth Tethering is considered
17	GSM voice + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz WLAN Ant 2 + 6 GHz WLAN MIMO	Yes*	Yes	N/A	Yes	* Bluetooth Tethering is considered
18	UMTS + 2.4 GHz Bluetooth Ant 1	Yes*	Yes	Yes*	Yes	* Bluetooth Tethering is considered
19	UMTS + 2.4 GHz Bluetooth Ant 2	Yes	Yes	Yes	Yes	
20	UMTS + 2.4 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
21	UMTS + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
22	UMTS + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
23	UMTS + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
24	UMTS + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
25	UMTS + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz WLAN Ant 2	Yes*	Yes	Yes*	Yes	* Bluetooth Tethering is considered
26	UMTS + 2.4 GHz Bluetooth MIMO	Yes	Yes	Yes	Yes	
27	UMTS + 2.4 GHz Bluetooth Ant 1 + 5 GHz WLAN MIMO	Yes*	Yes	Yes*	Yes	* Bluetooth Tethering is considered
28	UMTS + 2.4 GHz Bluetooth Ant 1 + 6 GHz WLAN MIMO	Yes*	Yes	N/A	Yes	* Bluetooth Tethering is considered
29	UMTS + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
30	UMTS + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
31	UMTS + 2.4 GHz Bluetooth MIMO + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
32	UMTS + 2.4 GHz Bluetooth MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
33	UMTS + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz WLAN Ant 2 + 5 GHz WLAN MIMO	Yes*	Yes	Yes*	Yes	* Bluetooth Tethering is considered
34	UMTS + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz WLAN Ant 2 + 6 GHz WLAN MIMO	Yes*	Yes	N/A	Yes	* Bluetooth Tethering is considered
35	LTE + 2.4 GHz Bluetooth Ant 1	Yes*	Yes	Yes*	Yes	* Bluetooth Tethering is considered
36	LTE + 2.4 GHz Bluetooth Ant 2	Yes	Yes	Yes	Yes	
37	LTE + 2.4 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
38	LTE + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
39	LTE + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
40	LTE + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
41	LTE + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
42	LTE + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz WLAN Ant 2	Yes*	Yes	Yes*	Yes	* Bluetooth Tethering is considered
43	LTE + 2.4 GHz Bluetooth MIMO	Yes	Yes	Yes	Yes	
44	LTE + 2.4 GHz Bluetooth Ant 1 + 5 GHz WLAN MIMO	Yes*	Yes	Yes*	Yes	* Bluetooth Tethering is considered
45	LTE + 2.4 GHz Bluetooth Ant 1 + 6 GHz WLAN MIMO	Yes*	Yes	N/A	Yes	* Bluetooth Tethering is considered
46	LTE + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
47	LTE + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
48	LTE + 2.4 GHz Bluetooth MIMO + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
49	LTE + 2.4 GHz Bluetooth MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
50	LTE + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz WLAN Ant 2 + 5 GHz WLAN MIMO	Yes*	Yes	Yes*	Yes	* Bluetooth Tethering is considered
51	LTE + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz WLAN Ant 2 + 6 GHz WLAN MIMO	Yes*	Yes	N/A	Yes	* Bluetooth Tethering is considered
52	LTE + NR	Yes	Yes	N/A	Yes	
53	LTE + NR + 2.4 GHz Bluetooth Ant 1	Yes*	Yes	Yes*	Yes	* Bluetooth Tethering is considered
54	LTE + NR + 2.4 GHz Bluetooth Ant 2	Yes	Yes	Yes	Yes	
55	LTE + NR + 2.4 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
56	LTE + NR + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
57	LTE + NR + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
58	LTE + NR + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
59	LTE + NR + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
60	LTE + NR + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz WLAN Ant 2	Yes*	Yes	Yes*	Yes	* Bluetooth Tethering is considered
61	LTE + NR + 2.4 GHz Bluetooth MIMO	Yes	Yes	Yes	Yes	
62	LTE + NR + 2.4 GHz Bluetooth Ant 1 + 5 GHz WLAN MIMO	Yes*	Yes	Yes*	Yes	* Bluetooth Tethering is considered
63	LTE + NR + 2.4 GHz Bluetooth Ant 1 + 6 GHz WLAN MIMO	Yes*	Yes	N/A	Yes	* Bluetooth Tethering is considered
64	LTE + NR + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
65	LTE + NR + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
66	LTE + NR + 2.4 GHz Bluetooth MIMO + 5 GHz WLAN MIMO	Yes	Yes	Yes	Yes	
67	LTE + NR + 2.4 GHz Bluetooth MIMO + 6 GHz WLAN MIMO	Yes	Yes	N/A	Yes	
68	LTE + NR + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz WLAN Ant 2 + 5 GHz WLAN MIMO	Yes*	Yes	Yes*	Yes	* Bluetooth Tethering is considered
69	LTE + NR + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz WLAN Ant 2 + 6 GHz WLAN MIMO	Yes*	Yes	N/A	Yes	* Bluetooth Tethering is considered
70	GPRS/EDGE + 2.4 GHz Bluetooth Ant 1	N/A	N/A	Yes*	Yes	* Bluetooth Tethering is considered
71	GPRS/EDGE + 2.4 GHz Bluetooth Ant 2	N/A	N/A	Yes	Yes	
72	GPRS/EDGE + 2.4 GHz WLAN MIMO	N/A	N/A	Yes	Yes	
73	GPRS/EDGE + 5 GHz WLAN MIMO	N/A	N/A	Yes	Yes	
74	GPRS/EDGE + 6 GHz WLAN MIMO	N/A	N/A	N/A	Yes	
75	GPRS/EDGE + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	N/A	N/A	Yes	Yes	
76	GPRS/EDGE + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	N/A	N/A	N/A	Yes	
77	GPRS/EDGE + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz WLAN Ant 2	N/A	N/A	Yes*	Yes	* Bluetooth Tethering is considered
78	GPRS/EDGE + 2.4 GHz Bluetooth MIMO	N/A	N/A	Yes	Yes	
79	GPRS/EDGE + 2.4 GHz Bluetooth Ant 1 + 5 GHz WLAN MIMO	N/A	N/A	Yes*	Yes	* Bluetooth Tethering is considered
80	GPRS/EDGE + 2.4 GHz Bluetooth Ant 1 + 6 GHz WLAN MIMO	N/A	N/A	N/A	Yes	
81	GPRS/EDGE + 2.4 GHz Bluetooth Ant 2 + 5 GHz WLAN MIMO	N/A	N/A	Yes	Yes	
82	GPRS/EDGE + 2.4 GHz Bluetooth Ant 2 + 6 GHz WLAN MIMO	N/A	N/A	N/A	Yes	
83	GPRS/EDGE + 2.4 GHz Bluetooth MIMO + 5 GHz WLAN MIMO	N/A	N/A	Yes	Yes	
84	GPRS/EDGE + 2.4 GHz Bluetooth MIMO + 6 GHz WLAN MIMO	N/A	N/A	N/A	Yes	
85	GPRS/EDGE + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz WLAN Ant 2 + 5 GHz WLAN MIMO	N/A	N/A	Yes*	Yes	* Bluetooth Tethering is considered
86	GPRS/EDGE + 2.4 GHz Bluetooth Ant 1 + 2.4 GHz WLAN Ant 2 + 6 GHz WLAN MIMO	N/A	N/A	N/A	Yes	

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 14 of 95



1. No other simultaneous scenarios besides described above is supported for this model.
2. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
3. Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.
4. 5 GHz Wireless Router is only supported for the U-NII-3 by S/W, therefore U-NII-1, U-NII-2A, U-NII-2C, and U-NII-4 were not evaluated for wireless router conditions.
5. 6 GHz Wireless Router is not supported, therefore it was not evaluated for wireless router conditions.
6. This device supports 2x2 MIMO Tx for WLAN 802.11a/b/g/n/ac/ax. 802.11a/b/g/n/ac/ax supports CDD and STBC and 802.11n/ac/ax additionally supports SDM.
7. This device supports VoWIFI.
8. This device supports Bluetooth Tethering on Ant 1 only.
9. This device supports VoLTE.
10. LTE + 5G NR FR1 Scenarios are limited to EN-DC combinations with anchor bands as shown in the NR FR1 checklist.
11. UWB and NFC were evaluated for phablet based on expected usage conditions.

1.8 Miscellaneous SAR Test Considerations

(A) WIFI/BT

This device supports channel 1-13 for 2.4 GHz WLAN. However, because channel 12/13 targets are not higher than that of channels 1-11, channels 1, 6, and 11 were considered for SAR testing per FCC KDB 248227 D01V02r02.

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB Publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-1, U-NII-2A, U-NII-2C, and U-NII-4 WIFI, only 2.4 GHz WIFI, 2.4 GHz Bluetooth, and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

This device supports IEEE 802.11ax with the following features:

- a) Up to 160 MHz Bandwidth only for 5/6 GHz
- b) Up to 20 MHz Bandwidth only for 2.4 GHz
- c) 2 Tx antenna output
- d) Up to 1024 QAM is supported
- e) TDWR and Band gap channels are supported for 5/6 GHz
- f) MU-MIMO UL Operations are not supported

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the display diagonal dimension is greater than 150mm and less than 200mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-1, U-NII-2A, U-NII-2C, and U-NII-4 WLAN, phablet SAR tests were performed. Phablet SAR was not evaluated for 2.4 GHz WLAN, 2.4 GHz Bluetooth, and U-NII-3 WLAN operations since wireless router 1g SAR was < 1.2 W/kg.

Per April 2019 TCB Workshop Notes, SAR testing was not required for 802.11ax when applying the initial test configuration procedures of KDB 248227, with 802.11ax considered a higher order 802.11 mode.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 15 of 95

REV 22.0
03/30/2022



This device supports 6 GHz WIFI Operations. RF Exposure assessment for these bands can be found in the WIFI 6E RF Exposure Report (report SN can be found in Section 1.11 – Bibliography). Simultaneous transmission analysis is addressed in Multi-Tx and Antenna SAR Considerations Appendix of this report.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 16 of 95

REV 22.0
03/30/2022



(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE Carrier Aggregation (CA) in the downlink. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive. The downlink carrier aggregation exclusion analysis can be found in Downlink LTE CA RF Conducted Powers Appendix.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the display diagonal dimension is greater than 150mm and less than 200mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.

This device supports downlink 4x4 MIMO operations for some LTE Bands. Per May 2017 TCB Workshop Notes, SAR for 4x4 DL MIMO was not needed since the maximum average output power in 4x4 DL MIMO mode was not more than 0.25 dB higher than the maximum output power with 4x4 DL MIMO inactive. Additionally, SAR for 4x4 MIMO Downlink Carrier Aggregation was not needed since the maximum average output power in 4x4 MIMO Downlink Carrier Aggregation mode was not more than 0.25 dB higher than the maximum output power with 4x4 MIMO Downlink and downlink carrier aggregation inactive.

This device supports LTE/NR capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE/NR Band falls completely within an LTE/NR band with a larger transmission frequency range, both LTE/NR bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE/NR bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

This device supports LTE Carrier Aggregation (CA) for LTE Band 41, with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per 2017 Fall TCB Workshop Notes.

NR implementation supports NSA mode only. In EN-DC mode, NR operates with the LTE Bands shown in the NR FR1 checklist acting as anchor bands. Per FCC guidance, SAR tests for NR Bands and LTE Anchors Bands were performed separately due to limitations in SAR probe calibration factors.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 17 of 95

REV 22.0
03/30/2022

1.9 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r05, D05Av01r02, D06v02r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D04v01 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D04v01r03 (Phablet Procedures)
- FCC KDB Publication 616217 D04v01r02 (Proximity Sensor)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)
- May 2017 TCB Workshop Notes (LTE 4x4 Downlink MIMO)
- November 2017, April 2018, October 2018 TCB Workshop Notes (LTE Carrier Aggregation)
- April 2019 TCB Workshop Notes (IEEE 802.11ax)

1.10 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

1.11 Bibliography

Report Type	Report Serial Number
RF Exposure Part 2 Test Report	1M2212080137-19.A3L
RF Exposure Part 0 Test Report	1M2212080137-21.A3L
WIFI 6-8GHz RF exposure	1M2212080137-22.A3L
RF Exposure Compliance Summary Report	1M2212080137-23.A3L

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 18 of 95

REV 22.0
03/30/2022

2 LTE AND NR INFORMATION

LTE Information					
Form Factor	Portable Handset				
Frequency Range of each LTE transmission band	LTE Band 12 (699.7 - 715.3 MHz)				
	LTE Band 13 (779.5 - 784.5 MHz)				
	LTE Band 26 (Cell) (814.7 - 848.3 MHz)				
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)				
	LTE Band 66 (AWS) (1710.7 - 1779.3 MHz)				
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)				
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)				
	LTE Band 41 (2498.5 - 2687.5 MHz)				
Channel Bandwidths	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 13: 5 MHz, 10 MHz				
	LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz				
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)		707.5 (23095)		715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)		707.5 (23095)		714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)		707.5 (23095)		713.5 (23155)
LTE Band 12: 10 MHz	704 (23060)		707.5 (23095)		711 (23130)
LTE Band 13: 5 MHz	779.5 (23205)		782 (23230)		784.5 (23255)
LTE Band 13: 10 MHz	N/A		782 (23230)		N/A
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)		831.5 (26865)		848.3 (27033)
LTE Band 26 (Cell): 3 MHz	815.5 (26705)		831.5 (26865)		847.5 (27025)
LTE Band 26 (Cell): 5 MHz	816.5 (26715)		831.5 (26865)		846.5 (27015)
LTE Band 26 (Cell): 10 MHz	819 (26740)		831.5 (26865)		844 (26990)
LTE Band 26 (Cell): 15 MHz	821.5 (26765)		831.5 (26865)		841.5 (26965)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)		836.5 (20525)		848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)		836.5 (20525)		847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)		836.5 (20525)		846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)		836.5 (20525)		844 (20600)
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)		1745 (132322)		1779.3 (132665)
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)		1745 (132322)		1778.5 (132657)
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)		1745 (132322)		1777.5 (132647)
LTE Band 66 (AWS): 10 MHz	1715 (132022)		1745 (132322)		1775 (132622)
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)		1745 (132322)		1772.5 (132597)
LTE Band 66 (AWS): 20 MHz	1720 (132072)		1745 (132322)		1770 (132572)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)		1732.5 (20175)		1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)		1732.5 (20175)		1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)		1732.5 (20175)		1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)		1732.5 (20175)		1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)		1732.5 (20175)		1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)		1732.5 (20175)		1745 (20300)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)		1880 (18900)		1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)		1880 (18900)		1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)		1880 (18900)		1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)		1880 (18900)		1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)		1880 (18900)		1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)		1880 (18900)		1900 (19100)
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2549.5 (40185)	2593 (40620)	2636.5 (41055)
UE Category	DL UE Cat 20, UL UE Cat 13				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES				
A-MPR (Additional MPR) disabled for SAR Testing?	YES				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Additional Information	This device does not support full CA features on 3GPP Release 16. It supports carrier aggregation and downlink MIMO features as shown in the RF Conducted Powers section of this report and the Downlink LTE CA RF Conducted Powers Appendix. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 16 Features are not supported: WIFI Offloading, Relay, HetNet, Enhanced MIMO, eCIC, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 19 of 95

NR Information					
Form Factor	Portable Handset				
Frequency Range of each NR transmission band	NR Band n5 (826.5 - 846.5 MHz)				
	NR Band n41 (2501.01 - 2685 MHz)				
Channel Bandwidths	NR Band n5: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	NR Band n41: 10 MHz, 15 MHz, 20 MHz, 30 MHz, 40 MHz, 50 MHz, 60 MHz, 70 MHz, 80 MHz, 90 MHz, 100 MHz				
Channel Numbers and Frequencies (MHz)					
NR Band n5: 5 MHz	826.5 (165300)		836.5 (167300)		846.5 (169300)
NR Band n5: 10 MHz	829 (165800)		836.5 (167300)		844 (168800)
NR Band n5: 15 MHz	831.5 (166300)		836.5 (167300)		841.5 (168300)
NR Band n5: 20 MHz	834 (166800)		836.5 (167300)		839 (167800)
NR Band n41: 10 MHz	2501.01 (500202)	2547 (509400)	2592.99 (518598)	2639.01 (527802)	2685 (537000)
NR Band n41: 15 MHz	2503.5 (500700)	2548.26 (509652)	2592.99 (518598)	2637.75 (527550)	2682.51 (536502)
NR Band n41: 20 MHz	2506.02 (501204)	2549.49 (509898)	2592.99 (518598)	2636.49 (527298)	2679.99 (535998)
NR Band n41: 30 MHz	2511 (502200)	2552.01 (510402)	2592.99 (518598)	2634 (526800)	2674.98 (534996)
NR Band n41: 40 MHz	2516.01 (503202)	2567.34 (513468)	N/A	2618.67 (523734)	2670 (534000)
NR Band n41: 50 MHz	2521.02 (504204)		2592.99 (518598)	2664.99 (532998)	
NR Band n41: 60 MHz	2526 (505200)		2592.99 (518598)	2659.98 (531996)	
NR Band n41: 70 MHz	2531.01 (506202)		N/A	2655 (531000)	
NR Band n41: 80 MHz	2536.02 (507204)		N/A	2649.99 (529998)	
NR Band n41: 90 MHz	2541 (508200)		N/A	2644.98 (528996)	
NR Band n41: 100 MHz	2546.01 (509202)		2592.99 (518598)	2640 (528000)	
SCS for NR Band n5	15 kHz				
SCS for NR Band n41	30 kHz				
Modulations Supported in UL	DFT-s-OFDM: 1/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM				
A-MPR (Additional MPR) disabled for SAR Testing?	YES				
EN-DC Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Anchor Bands for NR Band n5	LTE B2, LTE B66				
LTE Anchor Bands for NR Band n41	LTE B66				

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 20 of 95

3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 21 of 95

REV 22.0
03/30/2022

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1
Sample SAR Area Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x, y, z)
			Uniform Grid	Graded Grid		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 22 of 95

REV 22.0
03/30/2022

5 DEFINITION OF REFERENCE POINTS

5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 5-1
Close-Up Side view of ERP

5.2 HANDSET REFERENCE POINTS

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5-2
Front, back and side view of SAM Twin Phantom

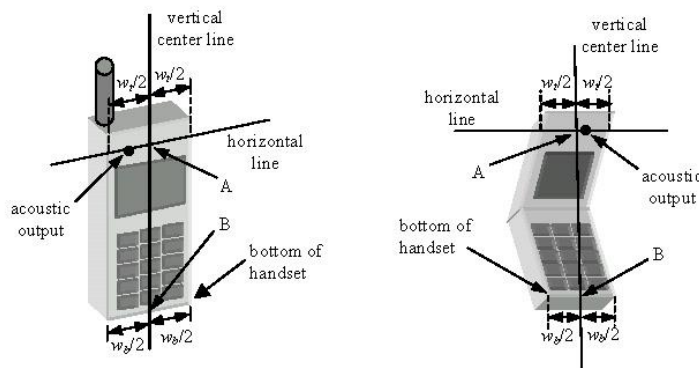


Figure 5-3
Handset Vertical Center & Horizontal Line Reference Points

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 23 of 95

6 TEST CONFIGURATION POSITIONS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

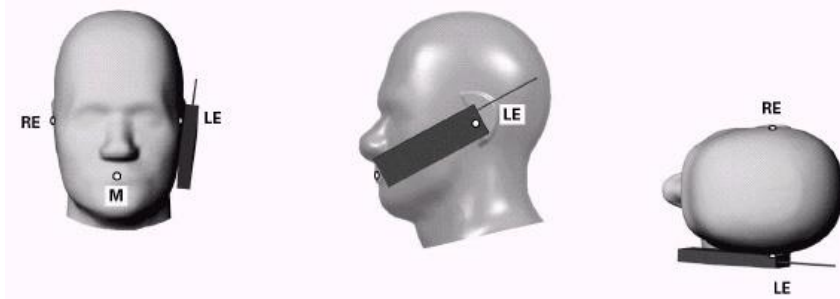


Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 24 of 95

REV 22.0
03/30/2022

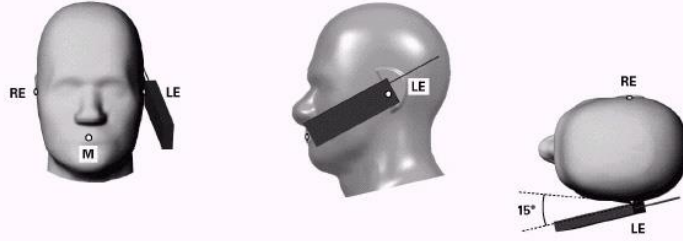


Figure 6-2 Front, Side and Top View of Ear/15° Tilt Position




Figure 6-3 Side view w/ relevant markings

6.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones. Per IEEE 1528-2013, a rotated SAM phantom is necessary to allow probe access to such regions. Both SAM heads of the TwinSAM-Chin20 are rotated 20 degrees around the NF line. Each head can be removed from the table for emptying and cleaning.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

6.5 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6-4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D04v01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

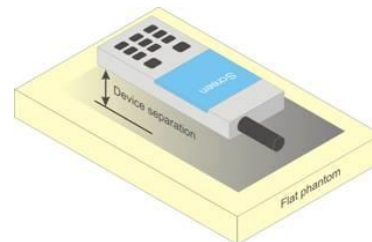


Figure 6-4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 25 of 95



contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person’s face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user’s body, SAR compliance for the body is also required. The 1g body and 10g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D04v01 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D04v01, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D04v01 procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

6.8 Phablet Configurations

For smart phones with a display diagonal dimension > 150 mm or an overall diagonal dimension > 160 mm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 26 of 95

REV 22.0
03/30/2022



support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna ≤ 25 mm from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR > 1.2 W/kg.

6.9 Proximity Sensor Considerations

This device uses a power reduction mechanism to reduce output powers in certain use conditions when the device is used close the user's body.

When the device's antenna is within a certain distance of the user, the sensor activates and reduces the maximum allowed output power. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, additional evaluation is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional test positions. Sensor triggering distance summary data is included in Power Reduction Verification Appendix.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antennas.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 27 of 95

REV 22.0
03/30/2022

7 RF EXPOSURE LIMITS

7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 28 of 95

REV 22.0
03/30/2022

8 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D04v01, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

8.4 SAR Measurement Conditions for UMTS

8.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 29 of 95

REV 22.0
03/30/2022

8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

8.4.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

8.4.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

8.4.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

8.5 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 30 of 95

8.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

8.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.5.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

8.5.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. Additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for downlink only carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 31 of 95

REV 22.0
03/30/2022



8.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

8.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.6.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

8.6.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 32 of 95

REV 22.0
03/30/2022

8.6.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n/ax OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.6.6 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. Per April 2019 TCB Workshop guidance, 802.11ax was considered the highest order 802.11 mode. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.6.7 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.6.6). When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.6.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 33 of 95



subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

8.6.9 MIMO SAR considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D04v01 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is <1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 34 of 95

REV 22.0
03/30/2022

9 RF CONDUCTED POWERS

All conducted power measurements for Sub6 WWAN technologies and bands in this section were performed by setting *Reserve_power_margin* (Qualcomm® Smart Transmit EFS entry) to 0dB, so that the EUT transmits continuously at minimum (P_{limits} , maximum tune up output power P_{max}).

9.1 GSM Conducted Powers

Table 9-1
GSM 850 Measured P_{max} for all DSI

Maximum Burst-Averaged Output Power										
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	31.89	31.98	30.50	28.93	27.46	26.00	24.65	22.07	21.21
	190	31.54	31.55	30.54	28.89	27.02	25.96	24.40	22.25	21.05
	251	31.85	31.85	30.84	28.70	27.20	26.11	24.42	22.02	21.00
Calculated Maximum Frame-Averaged Output Power										
Band	Channel	Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 850	128	22.69	22.78	24.31	24.50	24.28	16.80	18.46	17.64	18.03
	190	22.34	22.35	24.35	24.46	23.84	16.76	18.21	17.82	17.87
	251	22.65	22.65	24.65	24.27	24.02	16.91	18.23	17.59	17.82
GSM 850	Frame Avg.Targets:	22.80	22.80	25.31	25.07	24.32	17.30	18.81	18.57	18.82

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 35 of 95

Table 9-2
GSM 1900 Measured P_{max} for DSI = 2 (Head)

Maximum Burst-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 1900	512	28.93	28.84	27.58	25.80	23.67	24.97	23.66	21.70	20.54
	661	28.71	28.83	27.12	25.67	23.60	25.12	23.93	21.65	20.47
	810	28.62	28.67	27.01	25.86	23.65	24.86	23.75	21.75	20.40
Calculated Maximum Frame-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 1900	512	19.73	19.64	21.39	21.37	20.49	15.77	17.47	17.27	17.36
	661	19.51	19.63	20.93	21.24	20.42	15.92	17.74	17.22	17.29
	810	19.42	19.47	20.82	21.43	20.47	15.66	17.56	17.32	17.22
GSM 1900	Frame Avg.Targets:	19.80	19.80	21.81	22.07	21.32	16.30	17.81	17.57	17.82

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 36 of 95

Table 9-3

GSM 1900 Measured P_{limit} for DSI = 0 (Body-worn or Phablet with grip sensor inactive), DSI = 1 (Phablet with grip sensor active), DSI = 3 (Hotspot mode), and/or DSI=4 (Earjack active)

Maximum Burst-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 1900	512	27.48	27.30	24.66	22.79	21.46	24.97	23.66	21.70	20.54
	661	27.41	27.09	24.56	22.76	21.78	25.12	23.93	21.65	20.47
	810	27.26	27.03	24.58	22.58	21.40	24.86	23.75	21.75	20.40
Calculated Maximum Frame-Averaged Output Power										
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	GPRS [dBm] 3 Tx Slot	GPRS [dBm] 4 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot	EDGE [dBm] 3 Tx Slot	EDGE [dBm] 4 Tx Slot
GSM 1900	512	18.28	18.10	18.47	18.36	18.28	15.77	17.47	17.27	17.36
	661	18.21	17.89	18.37	18.33	18.60	15.92	17.74	17.22	17.29
	810	18.06	17.83	18.39	18.15	18.22	15.66	17.56	17.32	17.22
GSM 1900	Frame Avg.Targets:	18.80	18.80	18.81	18.77	18.82	16.30	17.81	17.57	17.82

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 37 of 95

Note:

1. Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
2. GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
3. EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8-PSK modulation do not have an impact on output power.

GSM Class: B
GPRS Multislot class: 33 (Max 4 Tx uplink slots)
EDGE Multislot class: 33 (Max 4 Tx uplink slots)
DTM Multislot Class: N/A



Figure 9-1
Power Measurement Setup

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 38 of 95

9.2 UMTS Conducted Powers

Table 9-4
UMTS 850 Measured P_{max} for all DSI

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	
99	WCDMA	12.2 kbps RMC	23.92	23.93	23.90	-
99		12.2 kbps AMR	23.77	23.80	23.80	-
6	HSDPA	Subtest 1	23.13	22.91	23.00	0
6		Subtest 2	23.14	22.88	22.98	0
6		Subtest 3	22.51	22.32	22.44	0.5
6		Subtest 4	22.61	22.36	22.47	0.5
6	HSUPA	Subtest 1	23.09	22.84	22.92	0
6		Subtest 2	21.08	20.85	20.90	2
6		Subtest 3	22.05	21.82	21.92	1
6		Subtest 4	21.05	20.85	20.92	2
6		Subtest 5	23.08	22.85	22.92	0

It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2 dB more than specified by 3GPP, but also as low as 0 dB according to the chipset implementation in this model.



Figure 9-2
Power Measurement Setup

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 39 of 95

REV 22.0
03/30/2022



9.3 LTE Conducted Powers

Note: Per FCC KDB Publication 941225 D05v02r05, LTE SAR for the lower bandwidths was not required for testing since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg. Lower bandwidth conducted powers for all LTE bands can be found in LTE and NR Lower Bandwidth RF Conducted Powers Appendix.

Note: Some bands do not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Carrier Aggregation Notes:

1. This device supports uplink carrier aggregation for LTE CA_41C with a maximum of two component carriers. For intraband contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when non-contiguous RB allocation is implemented. The conducted powers and MPR settings in this device are permanently implemented per the above 3GPP requirements.
2. Per FCC Guidance, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 40 of 95

REV 22.0
03/30/2022

9.3.1 LTE Band 12

Table 9-5
LTE Band 12 Measured P_{Max} for all DSI - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.11	0	0
	1	25	24.13		0
	1	49	24.44		0
	25	0	23.05	0-1	1
	25	12	23.12		1
	25	25	23.24		1
	50	0	23.19		1
16QAM	1	0	23.48	0-1	1
	1	25	23.49		1
	1	49	23.73		1
	25	0	22.05	0-2	2
	25	12	22.19		2
	25	25	22.28		2
	50	0	22.14		2
64QAM	1	0	22.43	0-2	2
	1	25	22.38		2
	1	49	22.66		2
	25	0	21.01	0-3	3
	25	12	21.17		3
	25	25	21.24		3
	50	0	21.16		3

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 41 of 95

9.3.2 LTE Band 13

Table 9-6
LTE Band 13 Measured P_{Max} for all DSI - 10 MHz Bandwidth

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.31	0	0
	1	25	24.28		0
	1	49	24.00		0
	25	0	23.22	0-1	1
	25	12	23.19		1
	25	25	23.07		1
	50	0	23.01		1
16QAM	1	0	23.72	0-1	1
	1	25	23.63		1
	1	49	23.39		1
	25	0	22.25	0-2	2
	25	12	22.22		2
	25	25	22.10		2
	50	0	22.14		2
64QAM	1	0	22.46	0-2	2
	1	25	22.47		2
	1	49	22.19		2
	25	0	21.19	0-3	3
	25	12	21.20		3
	25	25	21.09		3
	50	0	21.07		3

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 42 of 95

9.3.3 LTE Band 26

**Table 9-7
LTE Band 26 (Cell) Measured P_{Max} for all DSI - 15 MHz Bandwidth**

LTE Band 26 (Cell) 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26865 (831.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	24.12	0	0
	1	36	24.17		0
	1	74	24.16		0
	36	0	23.24	0-1	1
	36	18	23.17		1
	36	37	23.23		1
	75	0	23.18		1
16QAM	1	0	23.44	0-1	1
	1	36	23.48		1
	1	74	23.47		1
	36	0	22.28	0-2	2
	36	18	22.20		2
	36	37	22.26		2
	75	0	22.24		2
64QAM	1	0	22.36	0-2	2
	1	36	22.41		2
	1	74	22.41		2
	36	0	21.22	0-3	3
	36	18	21.17		3
	36	37	21.26		3
	75	0	21.22		3

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 43 of 95

9.3.4 LTE Band 66

Table 9-8
LTE Band 66 (AWS) Measured P_{Max} for DSI = 2 (Head) – 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.97	23.32	22.75	0	0
	1	50	23.07	23.34	22.71		0
	1	99	23.25	23.32	22.62		0
	50	0	22.08	22.22	22.00	0-1	1
	50	25	22.13	22.23	22.00		1
	50	50	22.15	22.17	21.88		1
16QAM	100	0	22.11	22.13	21.95	0-1	1
	1	0	22.12	22.18	22.14		1
	1	50	22.25	22.21	22.12		1
	1	99	22.33	22.31	22.09	0-2	1
	50	0	21.07	21.21	21.01		2
	50	25	21.15	21.16	21.00		2
64QAM	50	50	21.14	21.14	20.90	0-2	2
	100	0	21.12	21.14	20.97		2
	1	0	21.17	21.48	21.17		0-2
	1	50	21.29	21.55	21.16	2	
	1	99	21.48	21.51	21.10	2	
	64QAM	50	0	20.13	20.28	20.05	0-3
50		25	20.17	20.21	20.06	3	
50		50	20.16	20.18	19.93	3	
100		0	20.15	20.17	20.02	3	

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 44 of 95

Table 9-9
LTE Band 66 (AWS) Measured P_{Limit} for DSI = 0 (Body-worn or Phablet with grip sensor inactive), DSI = 1 (Phablet with grip sensor active), DSI = 3 (Hotspot mode) and/or DSI = 4 (Earjack Active) - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
Conducted Power [dBm]							
QPSK	1	0	19.11	19.05	18.91	0	0
	1	50	19.19	19.16	18.86		0
	1	99	19.29	19.28	18.98		0
	50	0	19.11	19.19	19.02	0-1	0
	50	25	19.22	19.16	19.03		0
	50	50	19.12	19.15	19.01		0
16QAM	100	0	19.15	19.15	19.10	0-1	0
	1	0	19.16	19.33	19.06		0
	1	50	19.36	19.25	19.15		0
	50	0	19.12	19.19	19.08	0-2	0
	50	25	19.16	19.15	19.06		0
	50	50	19.19	19.22	19.00		0
64QAM	100	0	19.19	19.15	19.05	0-2	0
	1	0	19.25	19.13	19.14		0
	1	50	19.23	19.20	19.13		0
	1	99	19.52	19.47	19.07	0-3	0
	50	0	19.08	19.23	19.08		0
	50	25	19.20	19.14	19.11		0
	50	50	19.32	19.21	19.02	0	
	100	0	19.16	19.15	19.05	0	

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 45 of 95

9.3.5 LTE Band 2

Table 9-10
LTE Band 2 (PCS) Measured P_{Max} for DSI = 2 (Head) – 20 MHz Bandwidth

LTE Band 2 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18700 (1860.0 MHz)	18900 (1880.0 MHz)	19100 (1900.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.22	23.33	23.17	0	0
	1	50	23.63	23.53	23.25		0
	1	99	23.76	23.60	23.08		0
	50	0	22.40	22.36	22.43	0-1	1
	50	25	22.51	22.41	22.41		1
	50	50	22.48	22.40	22.34		1
16QAM	100	0	22.47	22.38	22.39	0-1	1
	1	0	22.60	22.26	22.27		1
	1	50	22.57	22.60	22.46		1
	1	99	22.52	22.44	22.56	0-2	1
	50	0	21.47	21.37	21.41		2
	50	25	21.51	21.38	21.39		2
64QAM	50	50	21.50	21.43	21.32	0-2	2
	100	0	21.46	21.40	21.46		2
	1	0	21.64	21.53	21.35		0-2
	1	50	21.56	21.37	21.65	2	
	1	99	21.58	21.52	21.32	2	
	64QAM	50	0	20.39	20.32	20.42	0-3
50		25	20.46	20.37	20.41	3	
50		50	20.54	20.33	20.29	3	
100		0	20.44	20.34	20.40	3	

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 46 of 95

Table 9-11

LTE Band 2 (PCS) Measured P_{Limit} for DSI = 0 (Body-worn or Phablet with grip sensor inactive), DSI = 1 (Phablet with grip sensor active), DSI = 3 (Hotspot mode), and/or DSI = 4 (Earjack Active) - 20 MHz Bandwidth

LTE Band 2 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			18700 (1860.0 MHz)	18900 (1880.0 MHz)	19100 (1900.0 MHz)		
Conducted Power [dBm]							
QPSK	1	0	18.89	18.63	18.79	0	0
	1	50	18.97	18.68	18.80		0
	1	99	18.99	18.63	18.66		0
	50	0	18.90	18.94	18.88	0-1	0
	50	25	18.95	18.89	18.88		0
	50	50	18.96	18.88	18.79		0
100	0	18.95	18.86	18.87	0		
16QAM	1	0	19.22	19.09	18.87	0-1	0
	1	50	19.24	19.12	18.89		0
	1	99	19.14	19.10	18.77		0
	50	0	18.94	18.94	18.90	0-2	0
	50	25	18.96	18.89	18.90		0
	50	50	18.97	18.92	18.82		0
100	0	18.96	18.87	18.86	0		
64QAM	1	0	18.99	19.00	19.05	0-2	0
	1	50	19.09	19.12	18.93		0
	1	99	19.01	18.95	18.90		0
	50	0	18.94	18.94	18.86	0-3	0
	50	25	18.95	18.90	18.89		0
	50	50	18.98	18.91	18.79		0
100	0	18.99	18.91	18.86	0		

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 47 of 95

9.3.6 LTE Band 41

Table 9-12
LTE Band 41 PC3 Measured P_{Max} for DSI = 2 (Head) – 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
Conducted Power [dBm]									
QPSK	1	0	24.28	24.10	24.45	24.39	24.14	0	0
	1	50	24.18	24.16	24.44	24.32	24.11		0
	1	99	24.19	24.30	24.52	24.38	24.18		0
	50	0	23.33	23.24	23.53	23.47	23.21	0-1	1
	50	25	23.25	23.28	23.57	23.46	23.27		1
	50	50	23.24	23.38	23.60	23.42	23.17		1
16QAM	100	0	23.26	23.27	23.52	23.46	23.24	0-1	1
	1	0	23.45	23.46	23.49	23.43	23.36		1
	1	50	23.60	23.75	23.50	23.11	23.15		1
	1	99	23.66	23.65	23.59	23.10	23.14	0-2	1
	50	0	22.75	22.48	22.55	22.20	22.20		2
	50	25	22.64	22.49	22.47	22.17	22.18		2
64QAM	50	50	22.59	22.47	22.43	22.22	22.19	0-2	2
	100	0	22.58	22.44	22.45	22.20	22.16		2
	1	0	22.69	22.69	22.64	22.45	22.15		0-2
	1	50	22.67	22.52	22.42	22.25	21.73	2	
	1	99	22.48	22.44	22.47	21.94	21.85	2	
	64QAM	50	0	21.67	21.46	21.45	21.24	21.22	0-3
50		25	21.62	21.49	21.43	21.16	21.06	3	
50		50	21.59	21.53	21.40	21.17	21.10	3	
100		0	21.53	21.44	21.42	21.24	21.15	3	

Table 9-13
LTE Band 41 PC3 Uplink Carrier Aggregation Measured P_{Max} for DSI = 2 (Head)

Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC					Power			
								SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41	20	40620	2593.0	QPSK	1	99	LTE B41	20	40818	2612.8	QPSK	1	0	24.55	24.52

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 48 of 95

Table 9-14

LTE Band 41 PC3 Measured P_{Limit} for DSI = 0 (Body-worn or Phablet with grip sensor inactive), DSI = 1 (Phablet with grip sensor active), DSI = 3 (Hotspot Mode), and/or DSI = 4 (Earjack Active) - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth										
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)			
			Conducted Power [dBm]							
QPSK	1	0	21.24	21.16	21.58	21.34	21.13	0	0	
	1	50	21.25	21.29	21.56	21.33	21.09		0	
	1	99	21.20	21.33	21.60	21.31	21.11		0	
	16QAM	50	0	21.35	21.33	21.60	21.48	21.24	0-1	0
		50	25	21.33	21.34	21.69	21.47	21.25		0
		50	50	21.30	21.43	21.66	21.38	21.16		0
		64QAM	100	0	21.26	21.37	21.55	21.46	21.24	0-1
1			0	21.29	21.23	21.54	21.51	21.20	0	
1	50		21.21	21.51	21.54	21.56	21.22	0		
16QAM	1		99	21.26	21.41	21.57	21.42	21.17	0-2	0
	50		0	21.38	21.33	21.67	21.49	21.28		0
	50		25	21.40	21.35	21.68	21.47	21.29		0
	64QAM		50	50	21.33	21.43	21.67	21.38	21.18	0-2
		100	0	21.30	21.35	21.68	21.48	21.24	0	
1		0	21.27	21.21	21.68	21.54	21.15	0		
64QAM		1	50	21.32	21.44	21.61	21.42	21.23	0-2	0
		1	99	21.31	21.44	21.68	21.41	21.21		0
		50	0	21.22	21.12	21.47	21.26	21.04		0
		0-3	50	25	21.20	21.15	21.46	21.27	21.01	0
	50		50	21.19	21.16	21.47	21.14	20.93	0	
	100		0	21.20	21.16	21.44	21.25	21.02	0	

Table 9-15

LTE Band 41 PC3 Uplink Carrier Aggregation Measured P_{Limit} for DSI = 0 (Body-worn or Phablet with grip sensor inactive), DSI = 1 (Phablet with grip sensor active), DSI = 3 (Hotspot Mode), and/or DSI = 4 (Earjack Active)

Combination	PCC Band	PCC Bandwidth [MHz]	PCC					SCC					Power			
			PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41	20	40620	2593.0	QPSK	1	99	LTE B41	20	40818	2612.8	QPSK	1	0	21.47	21.60
CA_41C	LTE B41	20	39750	2506.0	QPSK	50	50	LTE B41	20	39948	2525.8	QPSK	50	0	21.23	21.30
CA_41C	LTE B41	20	40185	2549.5	QPSK	50	50	LTE B41	20	40383	2569.3	QPSK	50	0	21.51	21.43



Figure 9-3
Power Measurement Setup

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 49 of 95

9.4 NR Conducted Powers

Per October 2020 TCB Workshop Guidance, NR FR1 SAR evaluations are being generally based on adapting the existing LTE SAR procedures (FCC KDB Publication 941225 D05v02r05). Therefore, NR SAR for the lower bandwidths was not required for testing based on the measured output power and the reported NR SAR for the highest bandwidth. Lower bandwidth conducted powers for all NR bands can be found in LTE and NR Lower Bandwidth RF Conducted Powers Appendix.

Note: Some bands do not support non-overlapping channels. Per FCC Guidance, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

9.4.1 NR Band n5

Table 9-16
NR Band n5 Measured P_{Max} for all DSI - 20 MHz Bandwidth

NR Band n5 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			167300 (836.5 MHz) Conducted Power [dBm]		
DFT-s-OFDM $\pi/2$ BPSK	1	1	23.75	0	0.0
	1	53	23.70		0.0
	1	104	23.74		0.0
	50	0	23.23	0-0.5	0.5
	50	28	23.72	0	0.0
	50	56	23.38	0-0.5	0.5
	100	0	23.30		0.5
DFT-s-OFDM QPSK	1	1	23.71	0	0.0
	1	53	23.72		0.0
	1	104	23.79		0.0
	50	0	22.80	0-1	1.0
	50	28	23.71	0	0.0
	50	56	22.88	0-1	1.0
	100	0	22.90		1.0
DFT-s-OFDM 16QAM	1	1	22.66	0-1	1.0
CP-OFDM QPSK	1	1	22.34	0-1.5	1.5

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 50 of 95

9.4.2 NR Band n41 Antenna F

Table 9-17

NR Band n41 Antenna F Measured P_{Limit} for DSI = 0 (Body-worn, or Phablet with grip sensor inactive), or DSI = 1 (Phablet with grip sensor active), or DSI = 3 (Hotspot Mode), and/or DSI = 4 (Earjack Active) - 100 MHz Bandwidth

NR Band n41 100 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			518598 (2592.99 MHz) Conducted Power [dBm]		
DFT-s-OFDM $\pi/2$ BPSK	1	1	18.15	0	0.0
	1	137	18.34		0.0
	1	271	18.30		0.0
	135	0	18.34	0-0.5	0.0
	135	69	18.42	0	0.0
	135	138	18.31	0-0.5	0.0
	270	0	18.34		0.0
DFT-s-OFDM QPSK	1	1	18.20	0	0.0
	1	137	18.39		0.0
	1	271	18.21		0.0
	135	0	18.37	0-1	0.0
	135	69	18.42	0	0.0
	135	138	18.32	0-1	0.0
	270	0	18.31		0.0
DFT-s-OFDM 16QAM	1	1	18.24	0-1	0.0
CP-OFDM QPSK	1	1	18.23	0-1.5	0.0

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 51 of 95

Table 9-18
NR Band n41 Antenna F Measured P_{Limit} for DSI = 2 (Head) - 100 MHz Bandwidth

NR Band n41 100 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			518598 (2592.99 MHz) Conducted Power [dBm]		
DFT-s-OFDM $\pi/2$ BPSK	1	1	16.69	0	0.0
	1	137	16.83		0.0
	1	271	16.64		0.0
	135	0	16.78	0-0.5	0.0
	135	69	16.77	0	0.0
	135	138	16.72	0-0.5	0.0
	270	0	16.71		0.0
DFT-s-OFDM QPSK	1	1	16.58	0	0.0
	1	137	16.79		0.0
	1	271	16.64		0.0
	135	0	16.78	0-1	0.0
	135	69	16.79	0	0.0
	135	138	16.73	0-1	0.0
	270	0	16.71		0.0
DFT-s-OFDM 16QAM	1	1	16.64	0-1	0.0
CP-OFDM QPSK	1	1	16.61	0-1.5	0.0




Figure 9-4
Power Measurement Setup – NR FDD

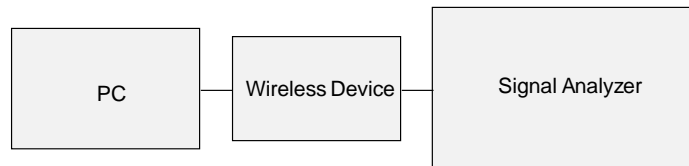


Figure 9-5
Power Measurement Setup – NR TDD

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 52 of 95

9.5 WLAN Conducted Powers

Table 9-19
2.4 GHz WLAN Maximum Average RF Power – Ant 2

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ax
		Average	Average	Average	Average
2412	1	19.45	17.55	17.44	16.32
2437	6	19.66	17.62	17.51	16.50
2462	11	19.67	17.45	17.61	16.48

Table 9-20
2.4 GHz WLAN Maximum Average RF Power – MIMO

2.4GHz 802.11b Conducted Power [dBm]				
Freq [MHz]	Channel	ANT1	ANT2	MIMO
2412	1	19.68	19.38	22.54
2437	6	19.72	19.44	22.59
2462	11	19.69	19.40	22.56

Table 9-21
2.4 GHz WLAN Reduced Average RF Power with RCV Active and/or During Conditions with 5/6 GHz WLAN and/or 5G NR – Ant 2

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ax
		Average	Average	Average	Average
2412	1	13.57	13.33	13.65	13.23
2437	6	13.81	13.61	13.44	13.42
2462	11	13.69	13.59	13.72	13.41

Table 9-22
2.4 GHz WLAN Reduced Average RF Power with RCV Active and/or During Conditions with 5/6 GHz WLAN and/or 5G NR – MIMO

2.4GHz 802.11n Conducted Power [dBm]				
Freq [MHz]	Channel	ANT1	ANT2	MIMO
2412	1	13.85	13.42	16.65
2437	6	13.72	13.35	16.55
2462	11	13.60	13.22	16.42

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 53 of 95

Table 9-23
5 GHz WLAN Maximum Average RF Power – MIMO

5GHz (20MHz) 802.11n Conducted Power [dBm]				
Freq [MHz]	Channel	ANT1	ANT2	MIMO
5180	36	17.16	16.97	20.08
5200	40	17.27	17.13	20.21
5220	44	17.20	17.10	20.16
5240	48	17.18	17.00	20.10
5260	52	17.26	17.12	20.20
5280	56	17.31	17.20	20.27
5300	60	17.22	16.96	20.10
5320	64	17.16	16.86	20.02
5500	100	17.40	17.31	20.37
5600	120	17.42	17.27	20.36
5620	124	17.39	17.30	20.36
5720	144	17.27	17.04	20.17
5745	149	17.08	16.86	19.98
5785	157	17.20	17.14	20.18
5825	165	17.26	16.99	20.14
5845	169	17.37	17.03	20.21
5865	173	17.40	17.20	20.31
5885	177	17.30	17.07	20.20

Table 9-24
5 GHz WLAN Reduced Average RF Power with RCV Active and/or During Conditions with 2.4 GHz WLAN and/or 5G NR - MIMO

5GHz (80MHz) 802.11ac Conducted Power [dBm]				
Freq [MHz]	Channel	ANT1	ANT2	MIMO
5210	42	12.44	12.22	15.34
5290	58	12.67	12.45	15.57
5530	106	12.80	12.66	15.74
5610	122	12.72	12.41	15.58
5690	138	12.69	12.57	15.64
5775	155	12.55	12.21	15.39
5855	171	12.67	12.47	15.58

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 54 of 95

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.

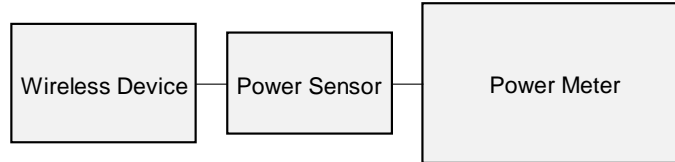


Figure 9-6
Power Measurement Setup

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 55 of 95

REV 22.0
03/30/2022

9.6 Bluetooth Conducted Powers

Table 9-25
Bluetooth Maximum Average RF Power– Antenna 1

Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	17.91	61.759
2441	1.0	GFSK	39	17.99	62.980
2480	1.0	GFSK	78	16.87	48.630

Table 9-26
Bluetooth Maximum Average RF Power– Antenna 2

Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	17.73	59.224
2441	1.0	GFSK	39	17.60	57.570
2480	1.0	GFSK	78	16.47	44.340

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 56 of 95

REV 22.0
03/30/2022

Table 9-27
Bluetooth Maximum Average RF Power – MIMO

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power - Ant0		Avg Conducted Power- Ant1		Avg Conducted Power-Dual	
			[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]
2402	1.0	0	14.03	25.281	13.00	19.930	16.55	45.211
2441	1.0	39	14.44	27.797	12.76	18.867	16.69	46.664
2480	1.0	78	13.49	22.341	12.47	17.664	16.02	40.005

Table 9-28
Bluetooth Reduced Average RF Power (RCV Active) – Antenna 1

Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	12.47	17.673
2441	1.0	GFSK	39	12.37	17.244
2480	1.0	GFSK	78	11.92	15.574

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 57 of 95

Table 9-29
Bluetooth Reduced Average RF Power (RCV Active) – Antenna 2

Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Avg Conducted Power	
				[dBm]	[mW]
2402	1.0	GFSK	0	12.35	17.188
2441	1.0	GFSK	39	12.11	16.272
2480	1.0	GFSK	78	11.83	15.229

Table 9-30
Bluetooth Reduced Average RF Power (RCV Active) – MIMO

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power-Ant1		Avg Conducted Power-Ant2		Avg Conducted Power-Dual	
			[dBm]	[mW]	[dBm]	[mW]	[dBm]	[mW]
2402	1.0	0	8.12	6.482	7.58	5.733	10.87	12.218
2441	1.0	39	8.88	7.721	7.90	6.167	11.43	13.900
2480	1.0	78	7.73	5.935	6.72	4.702	10.27	10.641

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 58 of 95

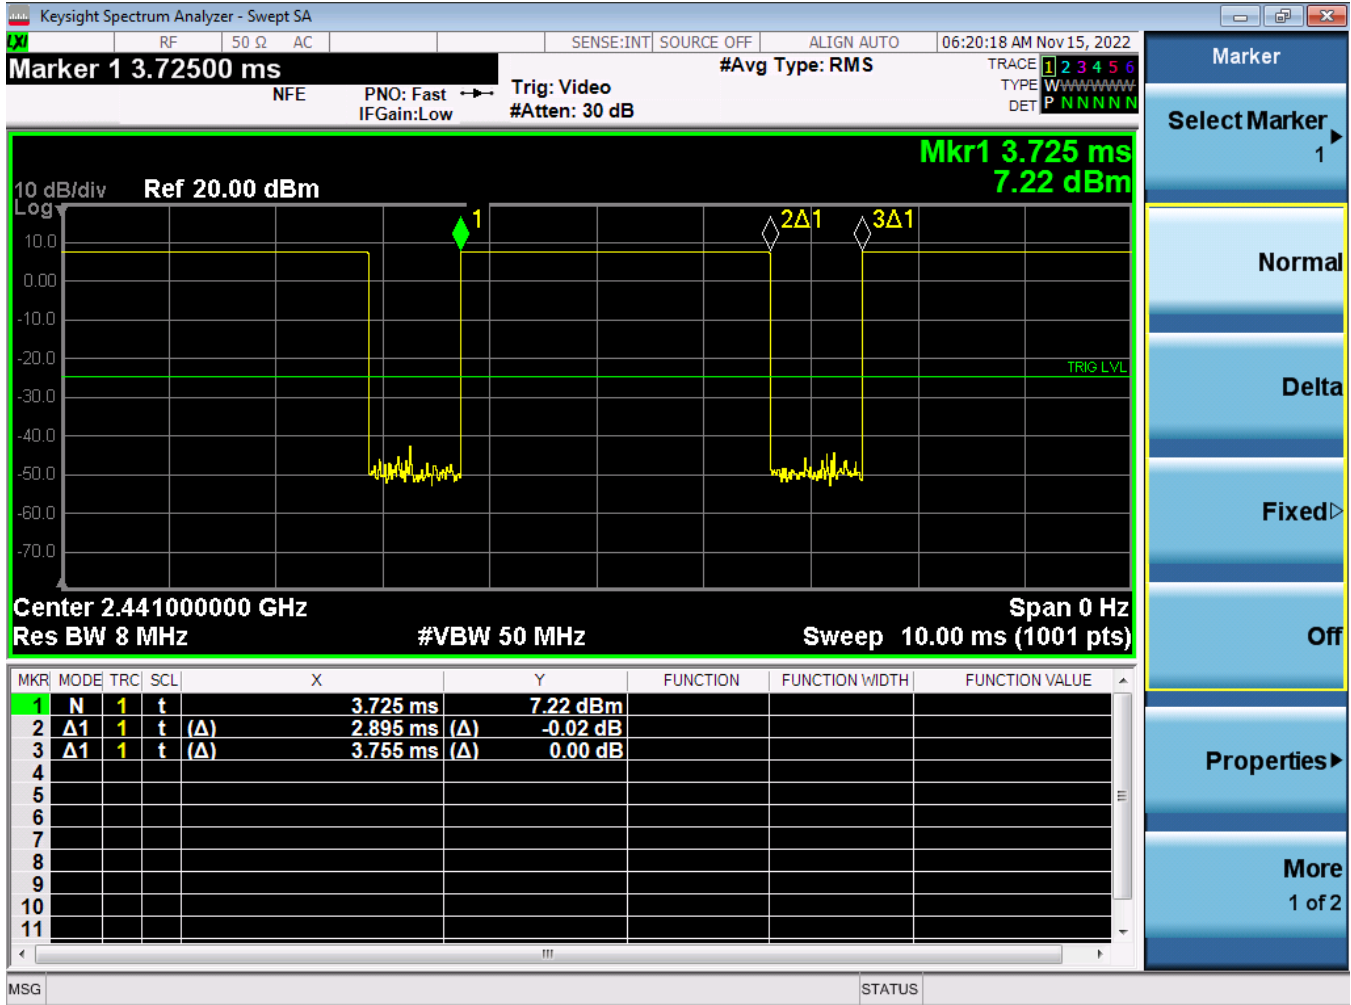


Figure 9-7
Bluetooth Antenna 1 Transmission Plot

Equation 9-1
Bluetooth Antenna 1 Duty Cycle Calculation

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.895ms}{3.755ms} * 100\% = 77.09\%$$

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 59 of 95

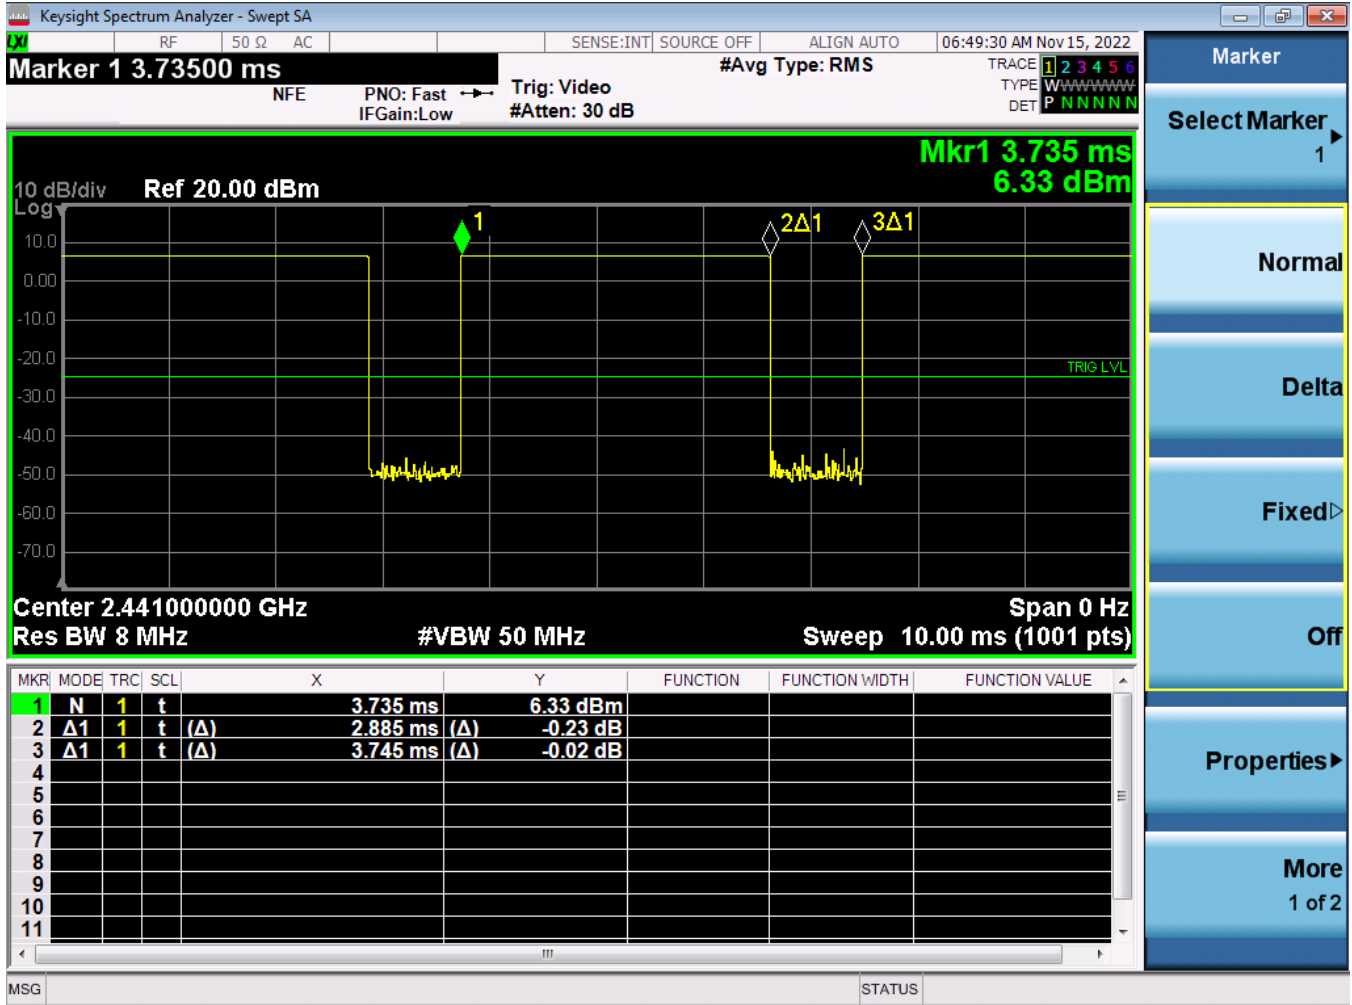


Figure 9-8
Bluetooth Antenna 2 Transmission Plot

Equation 9-2
Bluetooth Antenna 2 Duty Cycle Calculation

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.885ms}{3.745ms} * 100\% = 77.03\%$$

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 60 of 95

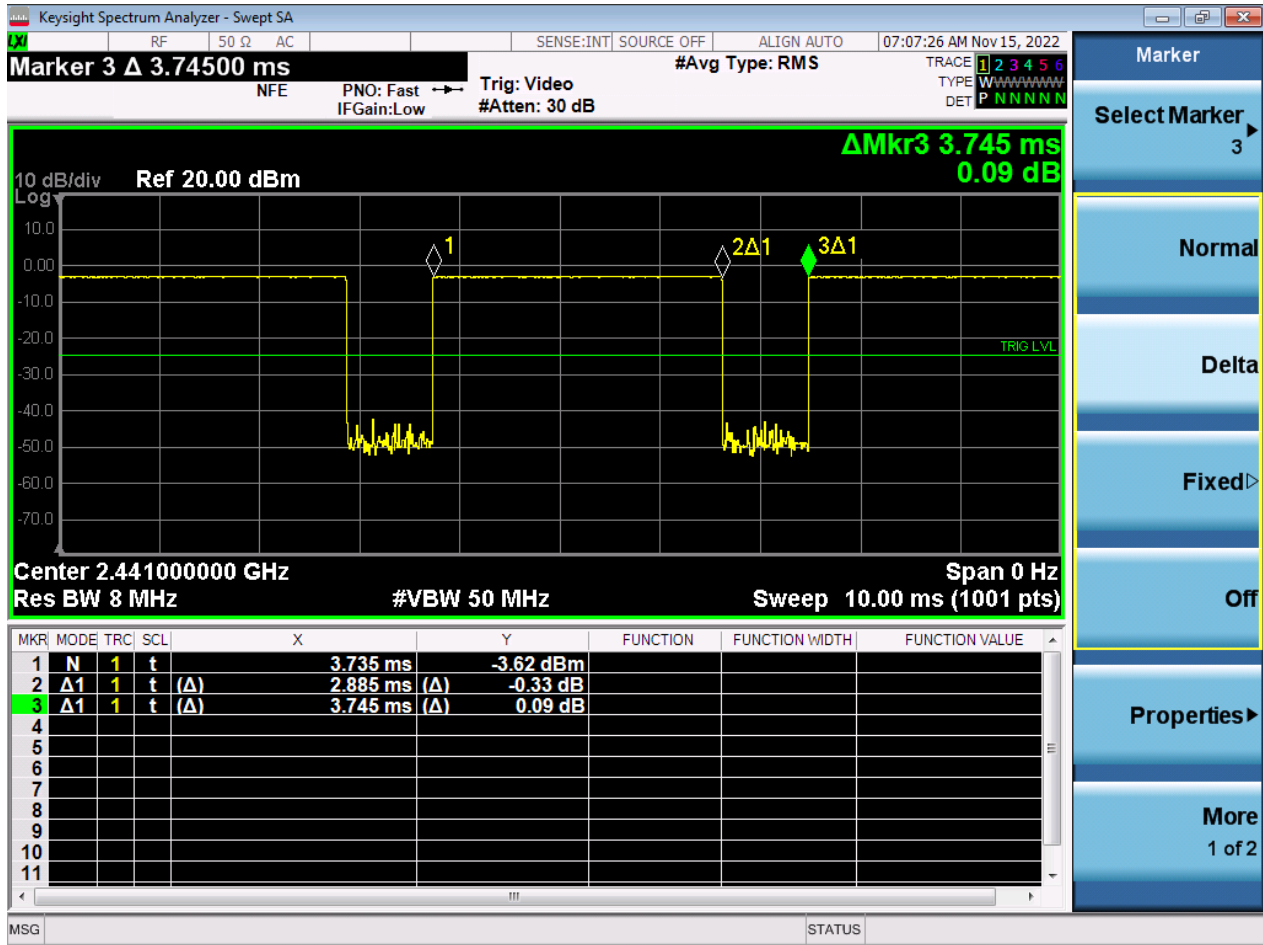


Figure 9-9
Bluetooth MIMO Transmission Plot

Equation 9-3
Bluetooth MIMO Duty Cycle Calculation

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.885ms}{3.745ms} * 100\% = 77.03\%$$

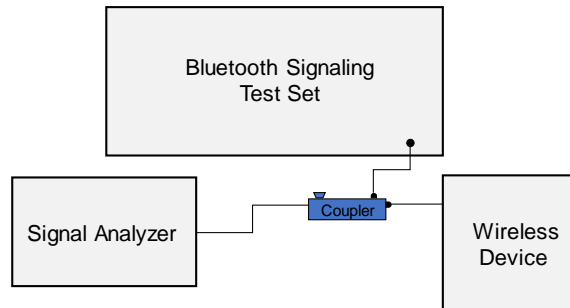


Figure 9-10
Power Measurement Setup

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 61 of 95

10 SYSTEM VERIFICATION

10.1 Tissue Verification

**Table 10-1
Measured Head Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
1/18/2023	30 Head	22.0	12	0.719	53.010	0.750	55.000	-4.13%	-3.62%
			13	0.719	52.956	0.750	55.000	-4.13%	-3.72%
			14	0.719	52.921	0.750	55.000	-4.13%	-3.78%
12/21/2022	750 Head	22.2	680	0.846	43.204	0.888	42.305	-4.73%	2.13%
			695	0.851	43.163	0.889	42.227	-4.27%	2.22%
			700	0.852	43.147	0.889	42.201	-4.16%	2.24%
			710	0.855	43.118	0.890	42.149	-3.93%	2.30%
			725	0.860	43.075	0.891	42.071	-3.48%	2.39%
			750	0.868	43.009	0.894	41.942	-2.91%	2.54%
			770	0.875	42.956	0.895	41.838	-2.23%	2.67%
			785	0.881	42.916	0.896	41.760	-1.67%	2.77%
			800	0.886	42.870	0.897	41.682	-1.23%	2.85%
12/19/2022	835 Head	19.4	815	0.861	41.234	0.898	41.594	-4.12%	-0.87%
			820	0.863	41.218	0.899	41.578	-4.00%	-0.87%
			835	0.868	41.173	0.900	41.500	-3.56%	-0.79%
			850	0.874	41.138	0.916	41.500	-4.59%	-0.87%
12/19/2022	835 Head	21.9	815	0.864	39.770	0.898	41.594	-3.79%	-4.39%
			820	0.866	39.751	0.899	41.578	-3.67%	-4.39%
			835	0.871	39.703	0.900	41.500	-3.22%	-4.33%
			850	0.877	39.662	0.916	41.500	-4.26%	-4.43%
12/21/2022	835 Head	22.2	815	0.891	42.814	0.898	41.594	-0.78%	2.93%
			820	0.893	42.797	0.899	41.578	-0.67%	2.93%
			835	0.898	42.754	0.900	41.500	-0.22%	3.02%
			850	0.903	42.727	0.916	41.500	-1.42%	2.96%
12/27/2022	1750 Head	22.0	1710	1.350	40.295	1.348	40.142	0.15%	0.38%
			1720	1.360	40.246	1.354	40.126	0.44%	0.30%
			1745	1.387	40.129	1.368	40.087	1.39%	0.10%
			1750	1.392	40.103	1.371	40.079	1.53%	0.06%
			1770	1.413	40.006	1.383	40.047	2.17%	-0.10%
			1790	1.434	39.930	1.394	40.016	2.87%	-0.21%
12/19/2022	1900 Head	21.7	1850	1.401	41.449	1.400	40.000	0.07%	3.62%
			1860	1.412	41.411	1.400	40.000	0.86%	3.53%
			1880	1.433	41.335	1.400	40.000	2.36%	3.34%
			1900	1.454	41.251	1.400	40.000	3.86%	3.13%
			1905	1.460	41.229	1.400	40.000	4.29%	3.07%
			1910	1.465	41.208	1.400	40.000	4.64%	3.02%
12/19/2022	2450 Head	22.0	2300	1.740	40.791	1.670	39.500	4.19%	3.27%
			2310	1.748	40.780	1.679	39.480	4.11%	3.29%
			2320	1.756	40.769	1.687	39.460	4.09%	3.32%
			2400	1.821	40.643	1.756	39.289	3.70%	3.45%
			2450	1.863	40.555	1.800	39.200	3.50%	3.46%
			2480	1.887	40.503	1.833	39.162	2.95%	3.42%
			2500	1.904	40.466	1.855	39.136	2.64%	3.40%
			2510	1.912	40.445	1.866	39.123	2.47%	3.38%
			2535	1.933	40.394	1.893	39.092	2.11%	3.33%
			2550	1.946	40.366	1.909	39.073	1.94%	3.31%
			2560	1.954	40.346	1.920	39.060	1.77%	3.29%
			2600	1.986	40.280	1.964	39.009	1.12%	3.26%
			2650	2.027	40.180	2.018	38.945	0.45%	3.17%
			2680	2.052	40.125	2.051	38.907	0.05%	3.13%
2700	2.069	40.101	2.073	38.882	-0.19%	3.14%			

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 62 of 95

**Table 10-2
Measured Head Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
01/05/2023	2450 Head	24.7	2300	1.717	41.045	1.670	39.500	2.81%	3.91%
			2310	1.728	41.010	1.679	39.480	2.92%	3.88%
			2320	1.739	40.972	1.687	39.460	3.08%	3.83%
			2400	1.827	40.655	1.756	39.289	4.04%	3.48%
			2450	1.884	40.468	1.800	39.200	4.67%	3.23%
			2480	1.916	40.359	1.833	39.162	4.53%	3.06%
			2500	1.938	40.290	1.855	39.136	4.47%	2.95%
			2510	1.949	40.256	1.866	39.123	4.45%	2.90%
			2535	1.979	40.172	1.893	39.092	4.54%	2.76%
			2550	1.997	40.126	1.909	39.073	4.61%	2.69%
			2560	2.009	40.096	1.920	39.060	4.64%	2.65%
			2600	2.051	39.959	1.964	39.009	4.43%	2.44%
			2650	2.108	39.794	2.018	38.945	4.46%	2.18%
			2680	2.140	39.688	2.051	38.907	4.34%	2.01%
			2700	2.161	39.601	2.073	38.882	4.25%	1.85%
01/03/2023	5200-5800 Head	19.4	5180	4.535	34.995	4.635	36.009	-2.16%	-2.82%
			5190	4.545	34.974	4.645	35.998	-2.15%	-2.84%
			5200	4.560	34.955	4.655	35.986	-2.04%	-2.87%
			5210	4.575	34.926	4.666	35.975	-1.95%	-2.92%
			5220	4.591	34.898	4.676	35.963	-1.82%	-2.96%
			5240	4.621	34.877	4.696	35.940	-1.60%	-2.96%
			5250	4.635	34.876	4.706	35.929	-1.51%	-2.93%
			5260	4.647	34.866	4.717	35.917	-1.48%	-2.93%
			5270	4.657	34.849	4.727	35.906	-1.48%	-2.94%
			5280	4.667	34.833	4.737	35.894	-1.48%	-2.96%
			5290	4.673	34.806	4.748	35.883	-1.58%	-3.00%
			5300	4.681	34.783	4.758	35.871	-1.62%	-3.03%
			5310	4.692	34.756	4.768	35.860	-1.59%	-3.08%
			5320	4.706	34.733	4.778	35.849	-1.51%	-3.11%
			5500	4.886	34.402	4.963	35.643	-1.55%	-3.48%
			5510	4.899	34.376	4.973	35.632	-1.49%	-3.52%
			5520	4.917	34.350	4.983	35.620	-1.32%	-3.57%
			5530	4.934	34.325	4.994	35.609	-1.20%	-3.61%
			5540	4.952	34.312	5.004	35.597	-1.04%	-3.61%
			5550	4.967	34.311	5.014	35.586	-0.94%	-3.58%
			5560	4.979	34.316	5.024	35.574	-0.90%	-3.54%
			5580	4.997	34.285	5.045	35.551	-0.95%	-3.56%
			5600	5.015	34.245	5.065	35.529	-0.99%	-3.61%
			5610	5.027	34.224	5.076	35.518	-0.97%	-3.64%
			5620	5.042	34.200	5.086	35.506	-0.87%	-3.68%
			5640	5.071	34.166	5.106	35.483	-0.69%	-3.71%
			5660	5.099	34.156	5.127	35.460	-0.55%	-3.68%
			5670	5.112	34.153	5.137	35.449	-0.49%	-3.66%
			5680	5.123	34.146	5.147	35.437	-0.47%	-3.64%
			5690	5.131	34.133	5.158	35.426	-0.52%	-3.65%
			5700	5.140	34.112	5.168	35.414	-0.54%	-3.68%
			5710	5.148	34.083	5.178	35.403	-0.58%	-3.73%
			5720	5.160	34.054	5.188	35.391	-0.54%	-3.78%
			5745	5.195	34.008	5.214	35.363	-0.36%	-3.83%
			5750	5.199	34.002	5.219	35.357	-0.38%	-3.83%
5755	5.205	33.997	5.224	35.351	-0.36%	-3.83%			
5765	5.215	33.976	5.234	35.340	-0.36%	-3.86%			
5775	5.225	33.949	5.245	35.329	-0.38%	-3.91%			
5785	5.235	33.918	5.255	35.317	-0.38%	-3.96%			
5795	5.245	33.896	5.265	35.305	-0.38%	-3.99%			
5800	5.250	33.889	5.270	35.300	-0.38%	-4.00%			
5800	5.250	33.889	5.270	35.300	-0.38%	-4.00%			
5805	5.255	33.880	5.275	35.294	-0.38%	-4.01%			
5825	5.271	33.817	5.296	35.271	-0.47%	-4.12%			
5835	5.282	33.790	5.305	35.230	-0.43%	-4.09%			
5845	5.294	33.760	5.315	35.210	-0.40%	-4.12%			
5855	5.306	33.734	5.325	35.197	-0.36%	-4.16%			
5865	5.315	33.712	5.336	35.190	-0.39%	-4.20%			
5865	5.315	33.712	5.336	35.190	-0.39%	-4.20%			
5865	5.315	33.712	5.336	35.190	-0.39%	-4.20%			
5875	5.332	33.702	5.347	35.183	-0.28%	-4.21%			
5885	5.346	33.686	5.357	35.177	-0.21%	-4.24%			
5905	5.367	33.654	5.379	35.163	-0.22%	-4.29%			

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 63 of 95

**Table 10-3
Measured Body Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
01/02/2023	750 Body	20.4	680	0.911	55.368	0.958	55.804	-4.91%	-0.78%
			695	0.917	55.324	0.959	55.745	-4.38%	-0.76%
			700	0.918	55.311	0.959	55.726	-4.28%	-0.74%
			710	0.922	55.287	0.960	55.687	-3.96%	-0.72%
			725	0.927	55.254	0.961	55.629	-3.54%	-0.67%
			750	0.937	55.205	0.964	55.531	-2.80%	-0.59%
			770	0.945	55.167	0.965	55.453	-2.07%	-0.52%
			785	0.951	55.134	0.966	55.395	-1.55%	-0.47%
12/15/2022	835 Body	22.1	800	0.956	55.095	0.967	55.336	-1.14%	-0.44%
			815	0.993	53.210	0.968	55.271	2.58%	-3.73%
			820	0.995	53.195	0.969	55.258	2.68%	-3.73%
			835	1.001	53.157	0.970	55.200	3.20%	-3.70%
12/15/2022	835 Body	20.0	850	1.007	53.133	0.988	55.154	1.92%	-3.66%
			815	0.956	54.263	0.968	55.271	-1.24%	-1.82%
			820	0.958	54.248	0.969	55.258	-1.14%	-1.83%
			835	0.964	54.213	0.970	55.200	-0.62%	-1.79%
12/20/2022	835 Body	21.0	850	0.970	54.191	0.988	55.154	-1.82%	-1.75%
			815	0.948	54.059	0.968	55.271	-2.07%	-2.19%
			820	0.950	54.045	0.969	55.258	-1.96%	-2.20%
			835	0.956	54.000	0.970	55.200	-1.44%	-2.17%
12/22/2022	835 Body	21.7	850	0.962	53.963	0.988	55.154	-2.63%	-2.16%
			815	0.920	55.294	0.968	55.271	-4.96%	0.04%
			820	0.925	55.248	0.969	55.258	-4.54%	-0.02%
			835	0.941	55.111	0.970	55.200	-2.99%	-0.16%
12/19/2022	1750 Body	22.0	850	0.957	54.964	0.988	55.154	-3.14%	-0.34%
			1710	1.449	51.400	1.463	53.537	-0.96%	-3.99%
			1720	1.458	51.353	1.469	53.511	-0.75%	-4.03%
			1745	1.486	51.254	1.485	53.445	0.07%	-4.10%
			1750	1.492	51.237	1.488	53.432	0.27%	-4.11%
			1770	1.514	51.182	1.501	53.379	0.87%	-4.12%
12/13/2022	1900 Body	23.8	1790	1.533	51.117	1.514	53.326	1.25%	-4.14%
			1850	1.488	52.080	1.520	53.300	-2.11%	-2.29%
			1860	1.498	52.053	1.520	53.300	-1.45%	-2.34%
			1880	1.518	51.990	1.520	53.300	-0.13%	-2.46%
			1900	1.540	51.925	1.520	53.300	1.32%	-2.58%
			1905	1.546	51.910	1.520	53.300	1.71%	-2.61%
12/15/2022	1900 Body	23.2	1910	1.552	51.891	1.520	53.300	2.11%	-2.64%
			1850	1.487	51.815	1.520	53.300	-2.17%	-2.79%
			1860	1.497	51.785	1.520	53.300	-1.51%	-2.84%
			1880	1.517	51.733	1.520	53.300	-0.20%	-2.94%
			1900	1.541	51.678	1.520	53.300	1.38%	-3.04%
1905	1.547	51.664	1.520	53.300	1.78%	-3.07%			
1910	1.553	51.649	1.520	53.300	2.17%	-3.10%			

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 64 of 95

**Table 10-4
Measured Body Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
12/13/2022	2450 Body	20.1	2300	1.881	51.234	1.809	52.900	3.98%	-3.15%
			2310	1.890	51.220	1.816	52.887	4.07%	-3.15%
			2320	1.898	51.208	1.826	52.873	3.94%	-3.15%
			2400	1.966	51.093	1.902	52.767	3.36%	-3.17%
			2450	2.009	51.034	1.950	52.700	3.03%	-3.16%
			2480	2.035	50.997	1.993	52.662	2.11%	-3.16%
			2500	2.052	50.974	2.021	52.636	1.53%	-3.16%
			2510	2.062	50.960	2.035	52.623	1.33%	-3.16%
			2535	2.087	50.920	2.071	52.592	0.77%	-3.18%
			2550	2.102	50.900	2.092	52.573	0.48%	-3.18%
			2560	2.112	50.887	2.106	52.560	0.28%	-3.18%
			2600	2.149	50.831	2.163	52.509	-0.65%	-3.20%
			2650	2.197	50.733	2.234	52.445	-1.66%	-3.26%
2680	2.227	50.688	2.277	52.407	-2.20%	-3.28%			
2700	2.246	50.658	2.305	52.382	-2.56%	-3.29%			
12/27/2022	2450 Body	22.4	2300	1.886	51.230	1.809	52.900	4.26%	-3.16%
			2310	1.894	51.222	1.816	52.887	4.30%	-3.15%
			2320	1.902	51.208	1.826	52.873	4.16%	-3.15%
			2400	1.972	51.110	1.902	52.767	3.68%	-3.14%
			2450	2.018	51.022	1.950	52.700	3.49%	-3.18%
			2480	2.046	50.980	1.993	52.662	2.66%	-3.19%
			2500	2.063	50.957	2.021	52.636	2.08%	-3.19%
			2510	2.073	50.944	2.035	52.623	1.87%	-3.19%
			2535	2.096	50.903	2.071	52.592	1.21%	-3.21%
			2550	2.110	50.871	2.092	52.573	0.86%	-3.24%
			2560	2.120	50.848	2.106	52.560	0.66%	-3.26%
			2600	2.155	50.781	2.163	52.509	-0.37%	-3.29%
			2650	2.202	50.679	2.234	52.445	-1.43%	-3.37%
2680	2.232	50.638	2.277	52.407	-1.98%	-3.38%			
2700	2.249	50.621	2.305	52.382	-2.43%	-3.36%			
12/29/2022	2450 Body	22.4	2300	1.875	51.333	1.809	52.900	3.65%	-2.96%
			2310	1.884	51.329	1.816	52.887	3.74%	-2.95%
			2320	1.893	51.324	1.826	52.873	3.67%	-2.93%
			2400	1.961	51.219	1.902	52.767	3.10%	-2.93%
			2450	2.006	51.156	1.950	52.700	2.87%	-2.93%
			2480	2.030	51.099	1.993	52.662	1.86%	-2.97%
			2500	2.049	51.067	2.021	52.636	1.39%	-2.98%
			2510	2.058	51.046	2.035	52.623	1.13%	-3.00%
			2535	2.082	51.014	2.071	52.592	0.53%	-3.00%
			2550	2.095	50.996	2.092	52.573	0.14%	-3.00%
			2560	2.103	50.980	2.106	52.560	-0.14%	-3.01%
			2600	2.136	50.915	2.163	52.509	-1.25%	-3.04%
			2650	2.182	50.840	2.234	52.445	-2.33%	-3.06%
2680	2.209	50.808	2.277	52.407	-2.99%	-3.05%			
2700	2.227	50.786	2.305	52.382	-3.38%	-3.05%			
01/03/2023	2450 Body	21.2	2300	1.897	51.370	1.809	52.900	4.86%	-2.89%
			2310	1.905	51.361	1.816	52.887	4.90%	-2.89%
			2320	1.913	51.354	1.826	52.873	4.76%	-2.87%
			2400	1.981	51.252	1.902	52.767	4.15%	-2.87%
			2450	2.026	51.187	1.950	52.700	3.90%	-2.87%
			2480	2.052	51.143	1.993	52.662	2.96%	-2.88%
			2500	2.070	51.117	2.021	52.636	2.42%	-2.89%
			2510	2.079	51.101	2.035	52.623	2.16%	-2.89%
			2535	2.102	51.062	2.071	52.592	1.50%	-2.91%
			2550	2.117	51.040	2.092	52.573	1.20%	-2.92%
			2560	2.127	51.023	2.106	52.560	1.00%	-2.92%
			2600	2.163	50.965	2.163	52.509	0.00%	-2.94%
			2650	2.209	50.860	2.234	52.445	-1.12%	-3.02%
2680	2.238	50.816	2.277	52.407	-1.71%	-3.04%			
2700	2.255	50.799	2.305	52.382	-2.17%	-3.02%			

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 65 of 95

**Table 10-5
Measured Body Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
12/21/2022	5200-5800 Body	21.1	5180	5.255	48.370	5.276	49.041	-0.40%	-1.37%
			5190	5.270	48.354	5.288	49.028	-0.34%	-1.37%
			5200	5.285	48.353	5.299	49.014	-0.26%	-1.35%
			5210	5.300	48.336	5.311	49.001	-0.21%	-1.36%
			5220	5.311	48.315	5.323	48.987	-0.23%	-1.37%
			5240	5.343	48.267	5.346	48.960	-0.06%	-1.42%
			5250	5.362	48.247	5.358	48.947	0.07%	-1.43%
			5260	5.380	48.229	5.369	48.933	0.20%	-1.44%
			5270	5.396	48.225	5.381	48.919	0.28%	-1.42%
			5280	5.410	48.220	5.393	48.906	0.32%	-1.40%
			5290	5.419	48.202	5.404	48.892	0.28%	-1.41%
			5300	5.429	48.176	5.416	48.879	0.24%	-1.44%
			5310	5.445	48.149	5.428	48.865	0.31%	-1.47%
			5320	5.461	48.126	5.439	48.851	0.40%	-1.48%
			5500	5.712	47.736	5.650	48.607	1.10%	-1.79%
			5510	5.727	47.716	5.661	48.594	1.17%	-1.81%
			5520	5.745	47.703	5.673	48.580	1.27%	-1.81%
			5530	5.765	47.678	5.685	48.566	1.41%	-1.83%
			5540	5.786	47.660	5.696	48.553	1.58%	-1.84%
			5550	5.800	47.642	5.708	48.539	1.61%	-1.85%
			5560	5.814	47.623	5.720	48.526	1.64%	-1.86%
			5580	5.842	47.585	5.743	48.499	1.72%	-1.88%
			5600	5.873	47.555	5.766	48.471	1.86%	-1.89%
			5610	5.889	47.538	5.778	48.458	1.92%	-1.90%
			5620	5.906	47.520	5.790	48.444	2.00%	-1.91%
			5640	5.941	47.489	5.813	48.417	2.20%	-1.92%
			5660	5.977	47.479	5.837	48.390	2.40%	-1.88%
			5670	5.989	47.469	5.848	48.376	2.41%	-1.87%
			5680	5.997	47.457	5.860	48.363	2.34%	-1.87%
			5690	6.010	47.431	5.872	48.349	2.35%	-1.90%
			5700	6.026	47.406	5.883	48.336	2.43%	-1.92%
			5710	6.043	47.382	5.895	48.322	2.51%	-1.95%
			5720	6.061	47.362	5.907	48.309	2.61%	-1.96%
			5745	6.095	47.324	5.936	48.275	2.68%	-1.97%
			5750	6.100	47.318	5.942	48.268	2.66%	-1.97%
			5755	6.104	47.310	5.947	48.261	2.64%	-1.97%
			5765	6.112	47.293	5.959	48.248	2.57%	-1.98%
			5775	6.128	47.273	5.971	48.234	2.63%	-1.99%
			5785	6.144	47.237	5.982	48.220	2.71%	-2.04%
			5795	6.164	47.199	5.994	48.207	2.84%	-2.09%
5800	6.171	47.179	6.000	48.200	2.85%	-2.12%			
5805	6.179	47.160	6.006	48.193	2.88%	-2.14%			
5825	6.208	47.118	6.029	48.166	2.97%	-2.18%			
5835	6.226	47.096	6.042	48.130	3.05%	-2.15%			
5845	6.245	47.073	6.054	48.110	3.15%	-2.16%			
5855	6.260	47.057	6.066	48.093	3.20%	-2.15%			
5865	6.274	47.035	6.077	48.080	3.24%	-2.17%			
5875	6.290	47.013	6.088	48.067	3.32%	-2.19%			
5885	6.307	46.987	6.100	48.053	3.39%	-2.22%			
5905	6.332	46.950	6.122	48.027	3.43%	-2.24%			

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 66 of 95

10.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in SAR System Validation Appendix.

Table 10-6
System Verification Results – Head

SAR System	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp. (C)	Liquid Temp. (C)	Input Power (W)	Source SN	Probe SN	DAE	Measured SAR 1g (W/kg)	1W Target SAR 1g (W/kg)	1W Normalized SAR 1g (W/kg)	Deviation 1g (%)	Measured SAR 10g (W/kg)	1W Target SAR 10g (W/kg)	1W Normalized SAR 10g (W/kg)	Deviation 10g (%)
G	13	HEAD	01/18/2023	22.6	22.0	1.00	1002	7527	1272	0.513	0.557	0.513	-7.90%	0.318	0.346	0.318	-8.09%
KS	750	HEAD	12/21/2022	21.5	20.7	0.20	1003	7402	1502	1.620	8.590	8.100	-5.70%	1.080	5.660	5.400	-4.59%
K1	835	HEAD	12/19/2022	21.1	19.4	0.20	4d180	7491	1532	2.050	9.750	10.250	5.13%	1.360	6.370	6.800	6.75%
S	835	HEAD	12/19/2022	20.6	20.2	0.20	4d132	7488	1415	1.960	9.660	9.800	1.45%	1.280	6.270	6.400	2.07%
KS	835	HEAD	12/21/2022	21.5	20.7	0.20	4d119	7402	1502	1.930	9.660	9.650	-0.10%	1.280	6.340	6.400	0.95%
C	1750	HEAD	12/27/2022	21.0	21.0	0.10	1150	7406	1677	3.780	36.900	37.800	2.44%	1.920	19.400	19.200	-1.03%
P	1900	HEAD	12/19/2022	18.8	21.9	0.10	5d148	7409	1334	4.170	40.100	41.700	3.99%	2.150	21.000	21.500	2.38%
L	2450	HEAD	12/19/2022	21.0	22.0	0.10	797	7410	1583	5.530	52.000	55.300	6.35%	2.540	24.400	25.400	4.10%
C	2450	HEAD	01/05/2023	22.9	22.7	0.10	719	7406	1677	5.090	55.000	50.900	-7.45%	2.340	25.700	23.400	-8.95%
L	2600	HEAD	12/19/2022	21.0	22.0	0.10	1071	7410	1583	5.760	56.500	57.600	1.95%	2.560	25.400	25.600	0.79%
G	5250	HEAD	01/03/2023	23.4	21.0	0.05	1057	7527	1272	3.690	81.200	73.800	-9.11%	1.050	23.200	21.000	-9.48%
G	5600	HEAD	01/03/2023	23.4	21.0	0.05	1057	7527	1272	3.920	84.200	78.400	-6.89%	1.100	23.900	22.000	-7.95%
G	5750	HEAD	01/03/2023	23.4	21.0	0.05	1057	7527	1272	3.730	80.800	74.600	-7.67%	1.060	22.900	21.200	-7.42%
G	5800	HEAD	01/03/2023	23.4	21.0	0.05	1057	7527	1272	3.720	82.100	74.400	-9.38%	1.050	23.000	21.000	-8.70%

Table 10-7
System Verification Results - Body

SAR System	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp. (C)	Liquid Temp. (C)	Input Power (W)	Source SN	Probe SN	DAE	Measured SAR 1g (W/kg)	1W Target SAR 1g (W/kg)	1W Normalized SAR 1g (W/kg)	Deviation 1g (%)	Measured SAR 10g (W/kg)	1W Target SAR 10g (W/kg)	1W Normalized SAR 10g (W/kg)	Deviation 10g (%)
K3	750	BODY	01/02/2023	20.9	20.0	0.20	1003	7547	1322	1.750	8.800	8.750	-0.57%	1.180	5.840	5.900	1.03%
K2	835	BODY	12/15/2022	22.5	22.1	0.20	4d180	7640	1645	2.050	9.710	10.250	5.56%	1.340	6.390	6.700	4.85%
K3	835	BODY	12/15/2022	21.4	20.0	0.20	4d119	7547	1322	1.970	9.910	9.850	-0.61%	1.300	6.590	6.500	-1.37%
K3	835	BODY	12/20/2022	20.5	21.0	0.20	4d119	7547	1322	1.980	9.910	9.900	-0.10%	1.320	6.590	6.600	0.15%
S	835	BODY	12/22/2022	24.2	21.7	0.20	4d132	7488	1415	1.890	9.810	9.450	-3.67%	1.250	6.440	6.250	-2.95%
C	1750	BODY	12/19/2022	21.5	21.5	0.10	1150	7406	1677	3.820	37.800	38.200	1.06%	1.990	20.000	19.900	-0.50%
J	1900	BODY	12/13/2022	22.5	21.8	0.10	5d080	7570	1558	3.950	40.700	39.500	-2.95%	2.050	21.300	20.500	-3.76%
J	1900	BODY	12/15/2022	23.9	21.2	0.10	5d080	7570	1558	4.040	40.700	40.400	-0.74%	2.090	21.300	20.900	-1.88%
L	2450	BODY	12/27/2022	23.0	22.4	0.10	797	7410	1583	5.130	50.200	51.300	2.19%	2.370	23.600	23.700	0.42%
L	2450	BODY	12/29/2022	24.0	22.4	0.10	981	7410	1583	5.140	50.300	51.400	2.19%	2.380	23.700	23.800	0.42%
L	2450	BODY	01/03/2023	21.3	21.2	0.10	981	7410	1583	5.310	50.300	53.100	5.57%	2.450	23.700	24.500	3.38%
L	2600	BODY	12/13/2022	20.9	20.1	0.10	1004	7410	1583	5.460	55.400	54.600	-1.44%	2.420	24.800	24.200	-2.42%
L	2600	BODY	12/27/2022	23.0	22.4	0.10	1071	7410	1583	5.580	54.300	55.800	2.76%	2.490	24.300	24.900	2.47%
L	2600	BODY	01/03/2023	21.3	21.2	0.10	1071	7410	1583	5.570	54.300	55.700	2.58%	2.470	24.300	24.700	1.65%
K	5250	BODY	12/21/2022	22.7	21.1	0.05	1057	7659	1407	3.550	74.200	71.000	-4.31%	1.020	20.600	20.400	-0.97%
K	5600	BODY	12/21/2022	22.7	21.1	0.05	1057	7659	1407	3.700	77.000	74.000	-3.90%	1.060	21.200	21.200	0.00%
K	5750	BODY	12/21/2022	22.7	21.1	0.05	1057	7659	1407	3.450	74.900	69.000	-7.88%	0.999	20.700	19.980	-3.48%
K	5800	BODY	12/21/2022	22.7	21.1	0.05	1057	7659	1407	3.680	74.800	73.600	-1.60%	1.040	20.500	20.800	1.46%

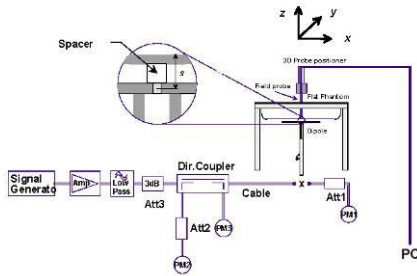


Figure 10-1
System Verification Setup Diagram



Figure 10-2
System Verification Setup Photo

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 67 of 95

11 SAR DATA SUMMARY

11.1 Standalone Head SAR Data

**Table 11-1
GSM 850 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Side	Test Position	Mode	Service	Antenna Config.	Device Serial Number	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
824.20	128	Right	Cheek	GSM 850	GSM	A	0959M	33.0	31.89	-0.04	1:8.3	0.129	1.291	0.167	
824.20	128	Right	Tilt	GSM 850	GSM	A	0959M	33.0	31.89	0.06	1:8.3	0.082	1.291	0.106	
824.20	128	Left	Cheek	GSM 850	GSM	A	0959M	33.0	31.89	0.14	1:8.3	0.153	1.291	0.198	A1
824.20	128	Left	Tilt	GSM 850	GSM	A	0959M	33.0	31.89	0.12	1:8.3	0.068	1.291	0.088	
ICNIRP 1998 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-2
GSM 1900 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Side	Test Position	Mode	Service	Antenna Config.	Device Serial Number	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
1850.20	512	Right	Cheek	GSM 1900	GSM	A	0973M	30.0	28.93	0.06	1:8.3	0.047	1.279	0.060	A2
1850.20	512	Right	Tilt	GSM 1900	GSM	A	0973M	30.0	28.93	0.02	1:8.3	0.017	1.279	0.022	
1850.20	512	Left	Cheek	GSM 1900	GSM	A	0973M	30.0	28.93	-0.04	1:8.3	0.036	1.279	0.046	
1850.20	512	Left	Tilt	GSM 1900	GSM	A	0973M	30.0	28.93	-0.03	1:8.3	0.035	1.279	0.045	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-3
UMTS 850 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Side	Test Position	Mode	Service	Antenna Config.	Device Serial Number	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	4183	Right	Cheek	UMTS 850	RMC	A	0959M	25.0	23.93	0.07	1:1	0.159	1.279	0.203	
836.60	4183	Right	Tilt	UMTS 850	RMC	A	0959M	25.0	23.93	0.19	1:1	0.102	1.279	0.130	
836.60	4183	Left	Cheek	UMTS 850	RMC	A	0959M	25.0	23.93	0.11	1:1	0.200	1.279	0.256	A3
836.60	4183	Left	Tilt	UMTS 850	RMC	A	0959M	25.0	23.93	0.12	1:1	0.093	1.279	0.119	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 68 of 95

**Table 11-4
LTE Band 12 Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Side	Test Position	Mode	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
707.50	23095	Mid	Right	Cheek	LTE Band 12	A	0959M	10	QPSK	1	49	25.5	24.44	0	0.05	1:1	0.098	1.276	0.125	
707.50	23095	Mid	Right	Cheek	LTE Band 12	A	0959M	10	QPSK	25	25	24.5	23.24	1	0.01	1:1	0.081	1.337	0.108	
707.50	23095	Mid	Right	Tilt	LTE Band 12	A	0959M	10	QPSK	1	49	25.5	24.44	0	0.20	1:1	0.057	1.276	0.073	
707.50	23095	Mid	Right	Tilt	LTE Band 12	A	0959M	10	QPSK	25	25	24.5	23.24	1	0.20	1:1	0.048	1.337	0.064	
707.50	23095	Mid	Left	Cheek	LTE Band 12	A	0959M	10	QPSK	1	49	25.5	24.44	0	0.10	1:1	0.107	1.276	0.137	A4
707.50	23095	Mid	Left	Cheek	LTE Band 12	A	0959M	10	QPSK	25	25	24.5	23.24	1	0.06	1:1	0.086	1.337	0.115	
707.50	23095	Mid	Left	Tilt	LTE Band 12	A	0959M	10	QPSK	1	49	25.5	24.44	0	0.20	1:1	0.061	1.276	0.078	
707.50	23095	Mid	Left	Tilt	LTE Band 12	A	0959M	10	QPSK	25	25	24.5	23.24	1	0.19	1:1	0.049	1.337	0.066	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-5
LTE Band 13 Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Side	Test Position	Mode	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
782.00	23230	Mid	Right	Cheek	LTE Band 13	A	0959M	10	QPSK	1	0	25.5	24.31	0	0.11	1:1	0.105	1.315	0.138	
782.00	23230	Mid	Right	Cheek	LTE Band 13	A	0959M	10	QPSK	25	0	24.5	23.22	1	0.09	1:1	0.093	1.343	0.125	
782.00	23230	Mid	Right	Tilt	LTE Band 13	A	0959M	10	QPSK	1	0	25.5	24.31	0	0.19	1:1	0.052	1.315	0.068	
782.00	23230	Mid	Right	Tilt	LTE Band 13	A	0959M	10	QPSK	25	0	24.5	23.22	1	0.08	1:1	0.044	1.343	0.059	
782.00	23230	Mid	Left	Cheek	LTE Band 13	A	0959M	10	QPSK	1	0	25.5	24.31	0	0.05	1:1	0.150	1.315	0.197	A5
782.00	23230	Mid	Left	Cheek	LTE Band 13	A	0959M	10	QPSK	25	0	24.5	23.22	1	0.08	1:1	0.116	1.343	0.156	
782.00	23230	Mid	Left	Tilt	LTE Band 13	A	0959M	10	QPSK	1	0	25.5	24.31	0	0.19	1:1	0.062	1.315	0.082	
782.00	23230	Mid	Left	Tilt	LTE Band 13	A	0959M	10	QPSK	25	0	24.5	23.22	1	-0.04	1:1	0.049	1.343	0.066	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-6
LTE Band 26 (Cell) Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Side	Test Position	Mode	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
831.50	26865	Mid	Right	Cheek	LTE Band 26 (Cell)	A	0959M	15	QPSK	1	36	25.5	24.17	0	0.04	1:1	0.148	1.358	0.201	
831.50	26865	Mid	Right	Cheek	LTE Band 26 (Cell)	A	0959M	15	QPSK	36	0	24.5	23.24	1	0.15	1:1	0.128	1.337	0.171	
831.50	26865	Mid	Right	Tilt	LTE Band 26 (Cell)	A	0959M	15	QPSK	1	36	25.5	24.17	0	0.01	1:1	0.120	1.358	0.163	
831.50	26865	Mid	Right	Tilt	LTE Band 26 (Cell)	A	0959M	15	QPSK	36	0	24.5	23.24	1	0.12	1:1	0.100	1.337	0.134	
831.50	26865	Mid	Left	Cheek	LTE Band 26 (Cell)	A	0959M	15	QPSK	1	36	25.5	24.17	0	-0.01	1:1	0.182	1.358	0.247	A6
831.50	26865	Mid	Left	Cheek	LTE Band 26 (Cell)	A	0959M	15	QPSK	36	0	24.5	23.24	1	0.18	1:1	0.144	1.337	0.193	
831.50	26865	Mid	Left	Tilt	LTE Band 26 (Cell)	A	0959M	15	QPSK	1	36	25.5	24.17	0	0.17	1:1	0.103	1.358	0.140	
831.50	26865	Mid	Left	Tilt	LTE Band 26 (Cell)	A	0959M	15	QPSK	36	0	24.5	23.24	1	0.20	1:1	0.080	1.337	0.107	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 69 of 95



**Table 11-7
LTE Band 66 (AWS) Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Side	Test Position	Mode	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
1745.00	132322	Mid	Right	Cheek	LTE Band 66 (AWS)	A	0968M	20	QPSK	1	50	24.5	23.34	0	-0.12	1:1	0.112	1.306	0.146	A7
1745.00	132322	Mid	Right	Cheek	LTE Band 66 (AWS)	A	0968M	20	QPSK	50	25	23.5	22.23	1	-0.04	1:1	0.083	1.340	0.111	
1745.00	132322	Mid	Right	Tilt	LTE Band 66 (AWS)	A	0968M	20	QPSK	1	50	24.5	23.34	0	0.02	1:1	0.068	1.306	0.089	
1745.00	132322	Mid	Right	Tilt	LTE Band 66 (AWS)	A	0968M	20	QPSK	50	25	23.5	22.23	1	-0.05	1:1	0.052	1.340	0.070	
1745.00	132322	Mid	Left	Cheek	LTE Band 66 (AWS)	A	0968M	20	QPSK	1	50	24.5	23.34	0	0.10	1:1	0.058	1.306	0.076	
1745.00	132322	Mid	Left	Cheek	LTE Band 66 (AWS)	A	0968M	20	QPSK	50	25	23.5	22.23	1	0.09	1:1	0.043	1.340	0.058	
1745.00	132322	Mid	Left	Tilt	LTE Band 66 (AWS)	A	0968M	20	QPSK	1	50	24.5	23.34	0	0.10	1:1	0.067	1.306	0.088	
1745.00	132322	Mid	Left	Tilt	LTE Band 66 (AWS)	A	0968M	20	QPSK	50	25	23.5	22.23	1	0.01	1:1	0.052	1.340	0.070	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Head 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-8
LTE Band 2 (PCS) Head SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Side	Test Position	Mode	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
1860.00	18700	Low	Right	Cheek	LTE Band 2 (PCS)	A	0973M	20	QPSK	1	99	24.5	23.76	0	0.08	1:1	0.108	1.186	0.128	A8
1860.00	18700	Low	Right	Cheek	LTE Band 2 (PCS)	A	0973M	20	QPSK	50	25	23.5	22.51	1	0.08	1:1	0.088	1.256	0.111	
1860.00	18700	Low	Right	Tilt	LTE Band 2 (PCS)	A	0973M	20	QPSK	1	99	24.5	23.76	0	0.06	1:1	0.054	1.186	0.064	
1860.00	18700	Low	Right	Tilt	LTE Band 2 (PCS)	A	0973M	20	QPSK	50	25	23.5	22.51	1	-0.17	1:1	0.045	1.256	0.057	
1860.00	18700	Low	Left	Cheek	LTE Band 2 (PCS)	A	0973M	20	QPSK	1	99	24.5	23.76	0	0.03	1:1	0.097	1.186	0.115	
1860.00	18700	Low	Left	Cheek	LTE Band 2 (PCS)	A	0973M	20	QPSK	50	25	23.5	22.51	1	0.02	1:1	0.069	1.256	0.087	
1860.00	18700	Low	Left	Tilt	LTE Band 2 (PCS)	A	0973M	20	QPSK	1	99	24.5	23.76	0	-0.07	1:1	0.085	1.186	0.101	
1860.00	18700	Low	Left	Tilt	LTE Band 2 (PCS)	A	0973M	20	QPSK	50	25	23.5	22.51	1	0.11	1:1	0.063	1.256	0.079	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Head 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-9
LTE Band 41 Head SAR**

MEASUREMENT RESULTS																					
Component Carrier	FREQUENCY		Side	Test Position	Mode	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
	MHz	Ch.															(W/kg)		(W/kg)		
N/A	2593.00	40620	Mid	Right	Cheek	LTE Band 41	B	0982M	20	QPSK	1	99	25.0	24.52	0	-0.12	1:1.58	0.030	1.117	0.034	
N/A	2593.00	40620	Mid	Right	Cheek	LTE Band 41	B	0982M	20	QPSK	50	50	24.0	23.60	1	-0.07	1:1.58	0.023	1.096	0.025	
N/A	2593.00	40620	Mid	Right	Tilt	LTE Band 41	B	0982M	20	QPSK	1	99	25.0	24.52	0	0.09	1:1.58	0.025	1.117	0.028	
N/A	2593.00	40620	Mid	Right	Tilt	LTE Band 41	B	0982M	20	QPSK	50	50	24.0	23.60	1	0.08	1:1.58	0.023	1.096	0.025	
N/A	2593.00	40620	Mid	Left	Cheek	LTE Band 41	B	0982M	20	QPSK	1	99	25.0	24.52	0	0.20	1:1.58	0.038	1.117	0.042	A9
N/A	2593.00	40620	Mid	Left	Cheek	LTE Band 41	B	0982M	20	QPSK	50	50	24.0	23.60	1	0.20	1:1.58	0.029	1.096	0.032	
PCC	2593.00	40620	Mid	Left	Cheek	LTE Band 41	B	0982M	20	QPSK	1	99	25.0	24.55	0	0.20	1:1.58	0.036	1.109	0.040	
SCC	2612.80	40818																			
N/A	2593.00	40620	Mid	Left	Tilt	LTE Band 41	B	0982M	20	QPSK	1	99	25.0	24.52	0	0.03	1:1.58	0.018	1.117	0.020	
N/A	2593.00	40620	Mid	Left	Tilt	LTE Band 41	B	0982M	20	QPSK	50	50	24.0	23.60	1	0.05	1:1.58	0.015	1.096	0.016	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Head 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 70 of 95

REV 22.0
03/30/2022

**Table 11-10
NR Band n5 Head SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Side	Test Position	Mode	Antenna Config	Serial Number	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
MHz	Ch.																(W/kg)				
836.50	167300	Md	Right	Cheek	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	1	104	25.5	23.79	0	0.17	1:1	0.113	1.483	0.168	
836.50	167300	Md	Right	Cheek	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	50	28	25.5	23.71	0	-0.06	1:1	0.106	1.510	0.160	
836.50	167300	Md	Right	Tilt	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	1	104	25.5	23.79	0	0.04	1:1	0.052	1.483	0.077	
836.50	167300	Md	Right	Tilt	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	50	28	25.5	23.71	0	-0.17	1:1	0.057	1.510	0.086	
836.50	167300	Md	Left	Cheek	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	1	104	25.5	23.79	0	0.01	1:1	0.112	1.483	0.166	
836.50	167300	Md	Left	Cheek	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	50	28	25.5	23.71	0	0.03	1:1	0.127	1.510	0.192	A10
836.50	167300	Md	Left	Cheek	NR Band n5	A	0990M	20	CP-OFDM	QPSK	1	1	24.0	22.34	1.5	-0.16	1:1	0.090	1.466	0.132	
836.50	167300	Md	Left	Tilt	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	1	104	25.5	23.79	0	-0.03	1:1	0.054	1.483	0.080	
836.50	167300	Md	Left	Tilt	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	50	28	25.5	23.71	0	0.01	1:1	0.065	1.510	0.098	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-11
NR Band n41 Head SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Side	Test Position	Mode	Antenna Config	Serial Number	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #	
MHz	Ch.																(W/kg)				
2592.99	518598	Md	Right	Cheek	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	1	137	17.0	16.79	0	0.01	1:1	0.452	1.050	0.475	
2592.99	518598	Md	Right	Cheek	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	135	69	17.0	16.79	0	0.04	1:1	0.455	1.050	0.478	
2592.99	518598	Md	Right	Tilt	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	1	137	17.0	16.79	0	0.05	1:1	0.596	1.050	0.626	
2592.99	518598	Md	Right	Tilt	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	135	69	17.0	16.79	0	-0.02	1:1	0.577	1.050	0.606	
2592.99	518598	Md	Right	Tilt	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	270	0	17.0	16.71	0	0.08	1:1	0.611	1.069	0.653	
2592.99	518598	Md	Right	Tilt	NR Band n41	F	0993M	100	CP-OFDM	QPSK	1	1	17.0	16.61	0	0.04	1:1	0.715	1.094	0.782	A11
2592.99	518598	Md	Left	Cheek	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	1	137	17.0	16.79	0	0.06	1:1	0.256	1.050	0.269	
2592.99	518598	Md	Left	Cheek	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	135	69	17.0	16.79	0	0.06	1:1	0.264	1.050	0.277	
2592.99	518598	Md	Left	Tilt	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	1	137	17.0	16.79	0	0.02	1:1	0.397	1.050	0.417	
2592.99	518598	Md	Left	Tilt	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	135	69	17.0	16.79	0	0.06	1:1	0.395	1.050	0.415	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-12
DTS Head SISO SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Side	Test Position	Mode	Service	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Data Rate (Mbps)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Maximum Duty Cycle (%)	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) (W/kg)	Plot #
MHz	Ch.														(W/kg)				
2437	6	Right	Cheek	802.11b	DSSS	2	0970M	22	1	14.0	13.81	-0.03	100.00	98.90	0.097	1.045	1.011	0.102	
2437	6	Right	Tilt	802.11b	DSSS	2	0970M	22	1	14.0	13.81	0.03	100.00	98.90	0.017	1.045	1.011	0.018	
2437	6	Left	Cheek	802.11b	DSSS	2	0970M	22	1	14.0	13.81	0.04	100.00	98.90	0.142	1.045	1.011	0.150	
2437	6	Left	Tilt	802.11b	DSSS	2	0970M	22	1	14.0	13.81	0.06	100.00	98.90	0.016	1.045	1.011	0.017	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 71 of 95

**Table 11-13
DTS Head MIMO SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Side	Test Position	Mode	Service	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Data Rate (Mbps)	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Maximum Duty Cycle (%)	Duty Cycle (%)	SAR (1g) (W/kg)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) (W/kg)	Plot #
MHz	Ch.																				
2412	1	Right	Cheek	802.11n	OFDM	MIMO	0970M	20	13	14.0	13.85	14.0	13.42	0.08	100.00	92.20	0.294	1.143	1.085	0.365	A12
2412	1	Right	Tilt	802.11n	OFDM	MIMO	0970M	20	13	14.0	13.85	14.0	13.42	0.01	100.00	92.20	0.137	1.143	1.085	0.170	
2412	1	Left	Cheek	802.11n	OFDM	MIMO	0970M	20	13	14.0	13.85	14.0	13.42	0.06	100.00	92.20	0.194	1.143	1.085	0.241	
2412	1	Left	Tilt	802.11n	OFDM	MIMO	0970M	20	13	14.0	13.85	14.0	13.42	0.01	100.00	92.20	0.060	1.143	1.085	0.074	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Head 1.6 W/kg (mW/g) averaged over 1 gram										

Note: To achieve the 17.0 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 14.0 dBm.

**Table 11-14
NII MIMO Head SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Side	Test Position	Mode	Service	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Data Rate (Mbps)	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Maximum Duty Cycle (%)	Duty Cycle (%)	SAR (1g) (W/kg)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) (W/kg)	Plot #
MHz	Ch.																				
5290	58	Right	Cheek	802.11ac	OFDM	MIMO	0978M	80	58.5	13.0	12.67	13.0	12.45	-0.01	100.00	92.21	0.088	1.135	1.084	0.108	
5290	58	Right	Tilt	802.11ac	OFDM	MIMO	0978M	80	58.5	13.0	12.67	13.0	12.45	-0.20	100.00	92.21	0.073	1.135	1.084	0.090	
5290	58	Left	Cheek	802.11ac	OFDM	MIMO	0978M	80	58.5	13.0	12.67	13.0	12.45	0.08	100.00	92.21	0.231	1.135	1.084	0.284	
5290	58	Left	Tilt	802.11ac	OFDM	MIMO	0978M	80	58.5	13.0	12.67	13.0	12.45	0.11	100.00	92.21	0.204	1.135	1.084	0.251	
5530	106	Right	Cheek	802.11ac	OFDM	MIMO	0978M	80	58.5	13.0	12.80	13.0	12.66	0.13	100.00	92.21	0.185	1.081	1.084	0.217	
5530	106	Right	Tilt	802.11ac	OFDM	MIMO	0978M	80	58.5	13.0	12.80	13.0	12.66	-0.06	100.00	92.21	0.172	1.081	1.084	0.202	
5530	106	Left	Cheek	802.11ac	OFDM	MIMO	0978M	80	58.5	13.0	12.80	13.0	12.66	-0.03	100.00	92.21	0.288	1.081	1.084	0.337	
5530	106	Left	Tilt	802.11ac	OFDM	MIMO	0978M	80	58.5	13.0	12.80	13.0	12.66	-0.06	100.00	92.21	0.225	1.081	1.084	0.264	
5775	155	Right	Cheek	802.11ac	OFDM	MIMO	0978M	80	58.5	13.0	12.55	13.0	12.21	-0.13	100.00	92.21	0.282	1.199	1.084	0.367	
5775	155	Right	Tilt	802.11ac	OFDM	MIMO	0978M	80	58.5	13.0	12.55	13.0	12.21	-0.14	100.00	92.21	0.260	1.199	1.084	0.338	
5775	155	Left	Cheek	802.11ac	OFDM	MIMO	0978M	80	58.5	13.0	12.55	13.0	12.21	0.07	100.00	92.21	0.302	1.199	1.084	0.393	
5775	155	Left	Tilt	802.11ac	OFDM	MIMO	0978M	80	58.5	13.0	12.55	13.0	12.21	-0.04	100.00	92.21	0.293	1.199	1.084	0.381	
5855	171	Right	Cheek	802.11ac	OFDM	MIMO	0978M	80	58.5	13.0	12.67	13.0	12.47	-0.03	100.00	92.21	0.412	1.130	1.084	0.505	
5855	171	Right	Tilt	802.11ac	OFDM	MIMO	0978M	80	58.5	13.0	12.67	13.0	12.47	-0.09	100.00	92.21	0.355	1.130	1.084	0.435	
5855	171	Left	Cheek	802.11ac	OFDM	MIMO	0978M	80	58.5	13.0	12.67	13.0	12.47	0.02	100.00	92.21	0.490	1.130	1.084	0.600	A13
5855	171	Left	Tilt	802.11ac	OFDM	MIMO	0978M	80	58.5	13.0	12.67	13.0	12.47	-0.05	100.00	92.21	0.477	1.130	1.084	0.584	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Head 1.6 W/kg (mW/g) averaged over 1 gram										

Note: To achieve the 16.0 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 13.0 dBm.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 72 of 95

**Table 11-15
DSS Head SISO SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Side	Test Position	Mode	Service	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Maximum Duty Cycle (%)	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													(W/kg)			(W/kg)	
2402	0	Right	Cheek	Bluetooth	FHSS	1	0970M	1	12.5	12.47	-0.01	79.00	77.09	0.132	1.007	1.025	0.136	A14
2402	0	Right	Tilt	Bluetooth	FHSS	1	0970M	1	12.5	12.47	-0.08	79.00	77.09	0.041	1.007	1.025	0.042	
2402	0	Left	Cheek	Bluetooth	FHSS	1	0970M	1	12.5	12.47	0.03	79.00	77.09	0.032	1.007	1.025	0.033	
2402	0	Left	Tilt	Bluetooth	FHSS	1	0970M	1	12.5	12.47	0.09	79.00	77.09	0.015	1.007	1.025	0.015	
2402	0	Right	Cheek	Bluetooth	FHSS	2	0970M	1	12.5	12.35	-0.08	79.00	77.03	0.059	1.035	1.026	0.063	
2402	0	Right	Tilt	Bluetooth	FHSS	2	0970M	1	12.5	12.35	0.08	79.00	77.03	0.007	1.035	1.026	0.007	
2402	0	Left	Cheek	Bluetooth	FHSS	2	0970M	1	12.5	12.35	0.01	79.00	77.03	0.084	1.035	1.026	0.089	
2402	0	Left	Tilt	Bluetooth	FHSS	2	0970M	1	12.5	12.35	0.04	79.00	77.03	0.008	1.035	1.026	0.008	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-16
DSS Head MIMO SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Side	Test Position	Mode	Service	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Maximum Duty Cycle (%)	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.															(W/kg)			(W/kg)	
2441	39	Right	Cheek	Bluetooth	FHSS	MIMO	0970M	1	9.0	8.88	9.0	7.90	-0.01	79.00	77.03	0.055	1.288	1.026	0.073	
2441	39	Right	Tilt	Bluetooth	FHSS	MIMO	0970M	1	9.0	8.88	9.0	7.90	0.15	79.00	77.03	0.009	1.288	1.026	0.012	
2441	39	Left	Cheek	Bluetooth	FHSS	MIMO	0970M	1	9.0	8.88	9.0	7.90	0.07	79.00	77.03	0.112	1.288	1.026	0.148	
2441	39	Left	Tilt	Bluetooth	FHSS	MIMO	0970M	1	9.0	8.88	9.0	7.90	-0.15	79.00	77.03	0.007	1.288	1.026	0.009	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram											

Note: To achieve the 12.0 dBm maximum allowed MIMO power shown in the documentation, antenna 1 and antenna 2 transmit at a maximum allowed power of 9.0 dBm.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 73 of 95



11.2 Standalone Body-Worn SAR Data

**Table 11-17
GSM Body-Worn SAR Data**

MEASUREMENT RESULTS															
FREQUENCY		Side	Spacing	Mode	Service	Antenna Config.	Device Serial Number	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
824.20	128	back	15 mm	GSM 850	GSM	A	0959M	33.0	31.89	0.01	1:8.3	0.237	1.291	0.306	A15
1850.20	512	back	15 mm	GSM 1900	GSM	A	0968M	29.0	27.48	0.06	1:8.3	0.136	1.419	0.193	A16
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-18
UMTS Body-Worn SAR Data**

MEASUREMENT RESULTS															
FREQUENCY		Side	Spacing	Mode	Service	Antenna Config.	Device Serial Number	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	4183	back	15 mm	UMTS 850	RMC	A	0958M	25.0	23.93	0.00	1:1	0.331	1.279	0.423	A17
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-19
LTE Body-Worn SAR**

MEASUREMENT RESULTS																					
# CC Uplink	Component Carrier	FREQUENCY		Side	Spacing	Mode	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
		MHz	Ch.															(W/kg)		(W/kg)	
1 CC Uplink	N/A	707.50	23095	Mid	back	15 mm	A	0959M	10	QPSK	1	49	25.5	24.44	0	0.01	1:1	0.189	1.276	0.241	A18
1 CC Uplink	N/A	707.50	23095	Mid	back	15 mm	A	0959M	10	QPSK	25	25	24.5	23.24	1	-0.03	1:1	0.161	1.337	0.215	
1 CC Uplink	N/A	782.00	23230	Mid	back	15 mm	A	0959M	10	QPSK	1	0	25.5	24.31	0	0.01	1:1	0.222	1.315	0.292	A19
1 CC Uplink	N/A	782.00	23230	Mid	back	15 mm	A	0959M	10	QPSK	25	0	24.5	23.22	1	0.00	1:1	0.185	1.343	0.248	
1 CC Uplink	N/A	831.50	26865	Mid	back	15 mm	A	0958M	15	QPSK	1	36	25.5	24.17	0	0.00	1:1	0.334	1.358	0.454	A20
1 CC Uplink	N/A	831.50	26865	Mid	back	15 mm	A	0958M	15	QPSK	36	0	24.5	23.24	1	0.02	1:1	0.255	1.337	0.341	
1 CC Uplink	N/A	1720.00	132072	Low	back	15 mm	A	0968M	20	QPSK	1	99	20.0	19.29	0	-0.03	1:1	0.195	1.178	0.230	A21
1 CC Uplink	N/A	1720.00	132072	Low	back	15 mm	A	0968M	20	QPSK	50	25	20.0	19.22	0	0.00	1:1	0.189	1.197	0.226	
1 CC Uplink	N/A	1860.00	18700	Low	back	15 mm	A	0968M	20	QPSK	1	99	20.0	18.99	0	-0.02	1:1	0.160	1.262	0.202	
1 CC Uplink	N/A	1860.00	18700	Low	back	15 mm	A	0968M	20	QPSK	50	50	20.0	18.96	0	-0.04	1:1	0.161	1.271	0.205	A22
1 CC Uplink	N/A	2593.00	40620	Mid	back	15 mm	B	0982M	20	QPSK	1	99	22.0	21.60	0	-0.01	1:1.58	0.148	1.096	0.162	
1 CC Uplink	N/A	2593.00	40620	Mid	back	15 mm	B	0982M	20	QPSK	50	25	22.0	21.69	0	0.02	1:1.58	0.150	1.074	0.161	A23
2 CC Uplink	PCC	2593.00	40620	Mid	back	15 mm	B	0982M	20	QPSK	1	99	22.0	21.47	0	-0.04	1:1.58	0.146	1.130	0.165	
	SCC	2612.80	40818									0									
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 74 of 95

REV 22.0
03/30/2022

Table 11-20
NR Band n5 Body-Worn SAR

MEASUREMENT RESULTS																					
FREQUENCY		Side	Spacing	Mode	Antenna Config	Serial Number	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
836.50	167300	Mid	back	15 mm	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	1	104	25.5	23.79	0	-0.01	1:1	0.258	1.483	0.383	A24
836.50	167300	Mid	back	15 mm	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	50	28	25.5	23.71	0	0.01	1:1	0.244	1.510	0.368	
836.50	167300	Mid	back	15 mm	NR Band n5	A	0990M	20	CP-OFDM	QPSK	1	1	24.0	22.34	1.5	-0.02	1:1	0.176	1.466	0.258	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram									

Table 11-21
NR Band n41 Body-Worn SAR

MEASUREMENT RESULTS																					
FREQUENCY		Side	Spacing	Mode	Antenna Config	Serial Number	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.																(W/kg)		(W/kg)		
2592.99	518598	Mid	back	15 mm	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	1	137	19.0	18.39	0	-0.05	1:1	0.082	1.151	0.094	
2592.99	518598	Mid	back	15 mm	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	135	69	19.0	18.42	0	0.02	1:1	0.083	1.143	0.095	
2592.99	518598	Mid	back	15 mm	NR Band n41	F	0993M	100	CP-OFDM	QPSK	1	1	19.0	18.23	0	0.00	1:1	0.105	1.194	0.125	A25
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram									

Table 11-22
DTS SISO Body-Worn SAR

MEASUREMENT RESULTS																			
FREQUENCY		Side	Spacing	Mode	Service	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Data Rate (Mbps)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Maximum Duty Cycle (%)	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.														(W/kg)			(W/kg)	
2462	11	back	15 mm	802.11b	DSSS	2	0978M	22	1	20.0	19.67	-0.09	100.00	98.90	0.106	1.079	1.011	0.116	
2437	6	back	15 mm	802.11b	DSSS	2	0970M	22	1	14.0	13.81	0.11	100.00	98.90	0.017	1.045	1.011	0.018	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 11-23
DTS MIMO Body-Worn SAR

MEASUREMENT RESULTS																					
FREQUENCY		Side	Spacing	Mode	Service	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Data Rate (Mbps)	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Maximum Duty Cycle (%)	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.																(W/kg)			(W/kg)	
2437	6	back	15 mm	802.11b	DSSS	MIMO	0970M	22	1	20.0	19.72	20.0	19.44	-0.01	100.00	98.90	0.157	1.138	1.011	0.181	A26
2412	1	back	15 mm	802.11n	OFDM	MIMO	0970M	20	13	14.0	13.85	14.0	13.42	0.03	100.00	92.20	0.030	1.143	1.085	0.037	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram									

Note: In max power mode, to achieve the 23.0 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 20.0 dBm. During simultaneous conditions with 5/6 GHz WLAN and/or 5G NR, to achieve the 17.0 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 14.0 dBm

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 75 of 95

**Table 11-24
NII MIMO Body-Worn SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Side	Spacing	Mode	Service	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Data Rate (Mbps)	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Maximum Duty Cycle (%)	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.																(W/kg)			(W/kg)	
5290	58	back	15 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.67	13.0	12.45	0.00	100.00	92.21	0.054	1.135	1.084	0.066	
5530	106	back	15 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.80	13.0	12.66	0.09	100.00	92.21	0.047	1.081	1.084	0.055	
5775	155	back	15 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.55	13.0	12.21	0.04	100.00	92.21	0.043	1.199	1.084	0.056	
5855	171	back	15 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.67	13.0	12.47	0.01	100.00	92.21	0.055	1.130	1.084	0.067	
5280	56	back	15 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.31	17.5	17.20	-0.17	100.00	92.87	0.136	1.072	1.077	0.157	
5500	100	back	15 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.40	17.5	17.31	0.01	100.00	92.87	0.150	1.045	1.077	0.169	A27
5785	157	back	15 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.20	17.5	17.14	0.20	100.00	92.87	0.137	1.086	1.077	0.160	
5865	173	back	15 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.40	17.5	17.20	0.03	100.00	92.87	0.146	1.072	1.077	0.169	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Body 1.6 W/kg (mW/g) averaged over 1 gram										

Note: In max power, to achieve the 20.5 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 17.5 dBm. During simultaneous conditions with 2.4 GHz WLAN and/or 5G NR, to achieve the 16.0 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 13.0 dBm

**Table 11-25
DSS SISO Body-Worn SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Side	Spacing	Mode	Service	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Maximum Duty Cycle (%)	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													(W/kg)			(W/kg)	
2441	39	back	15 mm	Bluetooth	FHSS	1	0970M	1	18.0	17.99	-0.05	79.00	77.09	0.035	1.002	1.025	0.036	A28
2402	0	back	15 mm	Bluetooth	FHSS	2	0970M	1	18.0	17.73	-0.15	79.00	77.03	0.023	1.064	1.026	0.025	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Body 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-26
DSS MIMO Body-Worn SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Side	Spacing	Mode	Service	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Maximum Duty Cycle (%)	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.															(W/kg)			(W/kg)	
2441	39	back	15 mm	Bluetooth	FHSS	MIMO	0970M	1	14.5	14.44	14.5	12.76	0.01	79.00	77.03	0.016	1.493	1.026	0.025	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Body 1.6 W/kg (mW/g) averaged over 1 gram									

Note: To achieve the 17.5 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 14.5 dBm.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 76 of 95

11.3 Standalone Hotspot SAR Data

**Table 11-27
GPRS Hotspot SAR Data**

MEASUREMENT RESULTS																
FREQUENCY		Side	Spacing	Mode	Service	Antenna Config.	Device Serial Number	# of Time Slots	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
824.20	128	back	10 mm	GSM 850	GPRS	A	0959M	3	30.5	28.93	0.00	1:2.76	0.682	1.435	0.979	
836.60	190	back	10 mm	GSM 850	GPRS	A	0959M	3	30.5	28.89	-0.06	1:2.76	0.696	1.449	1.009	
848.80	251	back	10 mm	GSM 850	GPRS	A	0959M	3	30.5	28.70	-0.04	1:2.76	0.750	1.514	1.136	A29
824.20	128	front	10 mm	GSM 850	GPRS	A	0959M	3	30.5	28.93	0.05	1:2.76	0.448	1.435	0.643	
824.20	128	bottom	10 mm	GSM 850	GPRS	A	0959M	3	30.5	28.93	-0.03	1:2.76	0.237	1.435	0.340	
824.20	128	right	10 mm	GSM 850	GPRS	A	0959M	3	30.5	28.93	-0.04	1:2.76	0.219	1.435	0.314	
824.20	128	left	10 mm	GSM 850	GPRS	A	0959M	3	30.5	28.93	0.05	1:2.76	0.342	1.435	0.491	
1880.00	661	back	10 mm	GSM 1900	GPRS	A	0968M	4	23.0	21.78	-0.03	1:2.076	0.303	1.324	0.401	
1880.00	661	front	10 mm	GSM 1900	GPRS	A	0968M	4	23.0	21.78	-0.03	1:2.076	0.270	1.324	0.357	
1850.20	512	bottom	10 mm	GSM 1900	GPRS	A	0968M	4	23.0	21.46	0.00	1:2.076	0.682	1.426	0.973	
1880.00	661	bottom	10 mm	GSM 1900	GPRS	A	0968M	4	23.0	21.78	0.01	1:2.076	0.703	1.324	0.931	A30
1909.80	810	bottom	10 mm	GSM 1900	GPRS	A	0968M	4	23.0	21.40	0.01	1:2.076	0.646	1.445	0.933	
1880.00	661	right	10 mm	GSM 1900	GPRS	A	0968M	4	23.0	21.78	-0.04	1:2.076	0.055	1.324	0.073	
1880.00	661	left	10 mm	GSM 1900	GPRS	A	0968M	4	23.0	21.78	0.07	1:2.076	0.029	1.324	0.038	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-28
UMTS Hotspot SAR Data**

MEASUREMENT RESULTS																
FREQUENCY		Side	Spacing	Mode	Service	Antenna Config.	Device Serial Number	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.											(W/kg)		(W/kg)		
826.40	4132	back	10 mm	UMTS 850	RMC	A	0958M	25.0	23.92	0.00	1:1	0.620	1.282	0.795		
836.60	4183	back	10 mm	UMTS 850	RMC	A	0958M	25.0	23.93	-0.01	1:1	0.647	1.279	0.828		
846.60	4233	back	10 mm	UMTS 850	RMC	A	0958M	25.0	23.90	0.02	1:1	0.733	1.288	0.944	A31	
836.60	4183	front	10 mm	UMTS 850	RMC	A	0958M	25.0	23.93	0.00	1:1	0.396	1.279	0.506		
836.60	4183	bottom	10 mm	UMTS 850	RMC	A	0958M	25.0	23.93	0.02	1:1	0.222	1.279	0.284		
836.60	4183	right	10 mm	UMTS 850	RMC	A	0958M	25.0	23.93	-0.02	1:1	0.160	1.279	0.205		
836.60	4183	left	10 mm	UMTS 850	RMC	A	0958M	25.0	23.93	0.01	1:1	0.268	1.279	0.343		
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 77 of 95



**Table 11-29
LTE Band 12 Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Side	Spacing	Mode	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
707.50	23095	Mid	back	10 mm	LTE Band 12	A	0959M	10	QPSK	1	49	25.5	24.44	0	0.01	1:1	0.292	1.276	0.373	A32
707.50	23095	Mid	back	10 mm	LTE Band 12	A	0959M	10	QPSK	25	25	24.5	23.24	1	0.00	1:1	0.240	1.337	0.321	
707.50	23095	Mid	front	10 mm	LTE Band 12	A	0959M	10	QPSK	1	49	25.5	24.44	0	-0.01	1:1	0.184	1.276	0.235	
707.50	23095	Mid	front	10 mm	LTE Band 12	A	0959M	10	QPSK	25	25	24.5	23.24	1	0.04	1:1	0.157	1.337	0.210	
707.50	23095	Mid	bottom	10 mm	LTE Band 12	A	0959M	10	QPSK	1	49	25.5	24.44	0	-0.01	1:1	0.050	1.276	0.064	
707.50	23095	Mid	bottom	10 mm	LTE Band 12	A	0959M	10	QPSK	25	25	24.5	23.24	1	-0.02	1:1	0.041	1.337	0.055	
707.50	23095	Mid	right	10 mm	LTE Band 12	A	0959M	10	QPSK	1	49	25.5	24.44	0	0.01	1:1	0.276	1.276	0.352	
707.50	23095	Mid	right	10 mm	LTE Band 12	A	0959M	10	QPSK	25	25	24.5	23.24	1	0.03	1:1	0.246	1.337	0.329	
707.50	23095	Mid	left	10 mm	LTE Band 12	A	0959M	10	QPSK	1	49	25.5	24.44	0	0.03	1:1	0.250	1.276	0.319	
707.50	23095	Mid	left	10 mm	LTE Band 12	A	0959M	10	QPSK	25	25	24.5	23.24	1	0.02	1:1	0.216	1.337	0.289	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Body 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-30
LTE Band 13 Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Side	Spacing	Mode	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
782.00	23230	Mid	back	10 mm	LTE Band 13	A	0959M	10	QPSK	1	0	25.5	24.31	0	-0.01	1:1	0.494	1.315	0.650	A33
782.00	23230	Mid	back	10 mm	LTE Band 13	A	0959M	10	QPSK	25	0	24.5	23.22	1	-0.01	1:1	0.404	1.343	0.543	
782.00	23230	Mid	front	10 mm	LTE Band 13	A	0959M	10	QPSK	1	0	25.5	24.31	0	0.00	1:1	0.288	1.315	0.379	
782.00	23230	Mid	front	10 mm	LTE Band 13	A	0959M	10	QPSK	25	0	24.5	23.22	1	0.00	1:1	0.236	1.343	0.317	
782.00	23230	Mid	bottom	10 mm	LTE Band 13	A	0959M	10	QPSK	1	0	25.5	24.31	0	-0.01	1:1	0.156	1.315	0.205	
782.00	23230	Mid	bottom	10 mm	LTE Band 13	A	0959M	10	QPSK	25	0	24.5	23.22	1	0.04	1:1	0.128	1.343	0.172	
782.00	23230	Mid	right	10 mm	LTE Band 13	A	0959M	10	QPSK	1	0	25.5	24.31	0	0.02	1:1	0.124	1.315	0.163	
782.00	23230	Mid	right	10 mm	LTE Band 13	A	0959M	10	QPSK	25	0	24.5	23.22	1	-0.05	1:1	0.111	1.343	0.149	
782.00	23230	Mid	left	10 mm	LTE Band 13	A	0959M	10	QPSK	1	0	25.5	24.31	0	0.06	1:1	0.181	1.315	0.238	
782.00	23230	Mid	left	10 mm	LTE Band 13	A	0959M	10	QPSK	25	0	24.5	23.22	1	-0.04	1:1	0.150	1.343	0.201	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 78 of 95

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.



**Table 11-31
LTE Band 26 (Cell) Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Side	Spacing	Mode	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
831.50	26865	Mid	back	10 mm	LTE Band 26 (Cell)	A	0958M	15	QPSK	1	36	25.5	24.17	0	0.01	1:1	0.722	1.358	0.980	A34
831.50	26865	Mid	back	10 mm	LTE Band 26 (Cell)	A	0958M	15	QPSK	36	0	24.5	23.24	1	-0.04	1:1	0.564	1.337	0.754	
831.50	26865	Mid	back	10 mm	LTE Band 26 (Cell)	A	0958M	15	QPSK	75	0	24.5	23.18	1	0.00	1:1	0.585	1.355	0.793	
831.50	26865	Mid	front	10 mm	LTE Band 26 (Cell)	A	0958M	15	QPSK	1	36	25.5	24.17	0	0.00	1:1	0.403	1.358	0.547	
831.50	26865	Mid	front	10 mm	LTE Band 26 (Cell)	A	0958M	15	QPSK	36	0	24.5	23.24	1	0.00	1:1	0.315	1.337	0.421	
831.50	26865	Mid	bottom	10 mm	LTE Band 26 (Cell)	A	0958M	15	QPSK	1	36	25.5	24.17	0	-0.01	1:1	0.215	1.358	0.292	
831.50	26865	Mid	bottom	10 mm	LTE Band 26 (Cell)	A	0958M	15	QPSK	36	0	24.5	23.24	1	0.00	1:1	0.171	1.337	0.229	
831.50	26865	Mid	right	10 mm	LTE Band 26 (Cell)	A	0958M	15	QPSK	1	36	25.5	24.17	0	0.04	1:1	0.101	1.358	0.137	
831.50	26865	Mid	right	10 mm	LTE Band 26 (Cell)	A	0958M	15	QPSK	36	0	24.5	23.24	1	0.01	1:1	0.091	1.337	0.122	
831.50	26865	Mid	left	10 mm	LTE Band 26 (Cell)	A	0958M	15	QPSK	1	36	25.5	24.17	0	0.02	1:1	0.222	1.358	0.301	
831.50	26865	Mid	left	10 mm	LTE Band 26 (Cell)	A	0958M	15	QPSK	36	0	24.5	23.24	1	0.02	1:1	0.193	1.337	0.258	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Body 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-32
LTE Band 66 (AWS) Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Side	Spacing	Mode	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
1720.00	132072	Low	back	10 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	1	99	20.0	19.29	0	0.03	1:1	0.410	1.178	0.483	
1720.00	132072	Low	back	10 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	50	25	20.0	19.22	0	-0.03	1:1	0.397	1.197	0.475	
1720.00	132072	Low	front	10 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	1	99	20.0	19.29	0	0.02	1:1	0.307	1.178	0.362	
1720.00	132072	Low	front	10 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	50	25	20.0	19.22	0	0.00	1:1	0.299	1.197	0.358	
1720.00	132072	Low	bottom	10 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	1	99	20.0	19.29	0	-0.01	1:1	0.668	1.178	0.787	
1720.00	132072	Low	bottom	10 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	50	25	20.0	19.22	0	0.04	1:1	0.680	1.197	0.814	
1745.00	132322	Mid	bottom	10 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	50	0	20.0	19.19	0	0.01	1:1	0.672	1.205	0.810	
1770.00	132572	High	bottom	10 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	50	25	20.0	19.03	0	-0.01	1:1	0.703	1.250	0.879	A35
1745.00	132322	Mid	bottom	10 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	100	0	20.0	19.15	0	-0.02	1:1	0.693	1.216	0.843	
1720.00	132072	Low	right	10 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	1	99	20.0	19.29	0	0.05	1:1	0.065	1.178	0.077	
1720.00	132072	Low	right	10 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	50	25	20.0	19.22	0	-0.01	1:1	0.068	1.197	0.081	
1720.00	132072	Low	left	10 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	1	99	20.0	19.29	0	-0.11	1:1	0.042	1.178	0.049	
1720.00	132072	Low	left	10 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	50	25	20.0	19.22	0	-0.16	1:1	0.039	1.197	0.047	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Body 1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 79 of 95

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.



Table 11-33
LTE Band 2 (PCS) Hotspot SAR

MEASUREMENT RESULTS																				
FREQUENCY		Side	Spacing	Mode	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
1860.00	18700	Low	back	10 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	1	99	20.0	18.99	0	-0.02	1:1	0.311	1.262	0.392	
1860.00	18700	Low	back	10 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	50	50	20.0	18.96	0	0.00	1:1	0.321	1.271	0.408	
1860.00	18700	Low	front	10 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	1	99	20.0	18.99	0	0.02	1:1	0.294	1.262	0.371	
1860.00	18700	Low	front	10 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	50	50	20.0	18.96	0	-0.01	1:1	0.295	1.271	0.375	
1860.00	18700	Low	bottom	10 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	1	99	20.0	18.99	0	0.00	1:1	0.731	1.262	0.923	
1880.00	18900	Mid	bottom	10 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	1	50	20.0	18.68	0	-0.01	1:1	0.762	1.355	1.033	
1900.00	19100	High	bottom	10 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	1	50	20.0	18.80	0	-0.03	1:1	0.757	1.318	0.998	
1860.00	18700	Low	bottom	10 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	50	50	20.0	18.96	0	-0.01	1:1	0.740	1.271	0.941	
1880.00	18900	Mid	bottom	10 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	50	0	20.0	18.94	0	0.01	1:1	0.767	1.276	0.979	A36
1900.00	19100	High	bottom	10 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	50	0	20.0	18.88	0	0.03	1:1	0.758	1.294	0.981	
1860.00	18700	Low	bottom	10 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	100	0	20.0	18.95	0	0.00	1:1	0.729	1.274	0.929	
1860.00	18700	Low	right	10 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	1	99	20.0	18.99	0	0.12	1:1	0.047	1.262	0.059	
1860.00	18700	Low	right	10 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	50	50	20.0	18.96	0	0.01	1:1	0.046	1.271	0.058	
1860.00	18700	Low	left	10 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	1	99	20.0	18.99	0	-0.04	1:1	0.035	1.262	0.044	
1860.00	18700	Low	left	10 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	50	50	20.0	18.96	0	0.03	1:1	0.037	1.271	0.047	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram								

Table 11-34
LTE Band 41 Hotspot SAR

MEASUREMENT RESULTS																						
# CC Uplink	Component Carrier	FREQUENCY		Side	Spacing	Mode	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
		MHz	Ch.															(W/kg)		(W/kg)		
1 CC Uplink	N/A	2593.00	40620	Mid	back	10 mm	LTE Band 41	B	0982M	20	QPSK	1	99	22.0	21.60	0	-0.01	1:1.58	0.378	1.096	0.414	
1 CC Uplink	N/A	2593.00	40620	Mid	back	10 mm	LTE Band 41	B	0982M	20	QPSK	50	25	22.0	21.69	0	0.02	1:1.58	0.377	1.074	0.405	
1 CC Uplink	N/A	2593.00	40620	Mid	front	10 mm	LTE Band 41	B	0982M	20	QPSK	1	99	22.0	21.60	0	-0.12	1:1.58	0.295	1.096	0.323	
1 CC Uplink	N/A	2593.00	40620	Mid	front	10 mm	LTE Band 41	B	0982M	20	QPSK	50	25	22.0	21.69	0	0.00	1:1.58	0.286	1.074	0.307	
1 CC Uplink	N/A	2506.00	39750	Low	bottom	10 mm	LTE Band 41	B	0982M	20	QPSK	1	50	22.0	21.25	0	-0.04	1:1.58	0.578	1.189	0.687	
1 CC Uplink	N/A	2549.50	40185	Low-Mid	bottom	10 mm	LTE Band 41	B	0982M	20	QPSK	1	99	22.0	21.33	0	0.03	1:1.58	0.596	1.167	0.696	
1 CC Uplink	N/A	2593.00	40620	Mid	bottom	10 mm	LTE Band 41	B	0982M	20	QPSK	1	99	22.0	21.60	0	-0.01	1:1.58	0.589	1.096	0.646	
1 CC Uplink	N/A	2636.50	41055	Mid-High	bottom	10 mm	LTE Band 41	B	0982M	20	QPSK	1	0	22.0	21.34	0	-0.02	1:1.58	0.585	1.164	0.681	
1 CC Uplink	N/A	2680.00	41490	High	bottom	10 mm	LTE Band 41	B	0982M	20	QPSK	1	0	22.0	21.13	0	0.02	1:1.58	0.552	1.222	0.675	
1 CC Uplink	N/A	2506.00	39750	Low	bottom	10 mm	LTE Band 41	B	0982M	20	QPSK	50	0	22.0	21.35	0	-0.07	1:1.58	0.577	1.161	0.670	
1 CC Uplink	N/A	2549.50	40185	Low-Mid	bottom	10 mm	LTE Band 41	B	0982M	20	QPSK	50	50	22.0	21.43	0	-0.03	1:1.58	0.612	1.140	0.698	
1 CC Uplink	N/A	2593.00	40620	Mid	bottom	10 mm	LTE Band 41	B	0982M	20	QPSK	50	25	22.0	21.69	0	-0.02	1:1.58	0.582	1.074	0.625	
1 CC Uplink	N/A	2636.50	41055	Mid-High	bottom	10 mm	LTE Band 41	B	0982M	20	QPSK	50	0	22.0	21.48	0	-0.05	1:1.58	0.597	1.127	0.673	
1 CC Uplink	N/A	2680.00	41490	High	bottom	10 mm	LTE Band 41	B	0982M	20	QPSK	50	25	22.0	21.25	0	-0.04	1:1.58	0.543	1.189	0.646	
1 CC Uplink	N/A	2593.00	40620	Mid	bottom	10 mm	LTE Band 41	B	0982M	20	QPSK	100	0	22.0	21.55	0	0.01	1:1.58	0.586	1.109	0.650	
2 CC Uplink	PCC	2549.50	40185	Low-Mid	bottom	10 mm	LTE Band 41	B	0982M	20	QPSK	50	22.0	21.51	0	0.01	1:1.58	0.618	1.119	0.692	A37	
	SCC	2569.30	40383																			
1 CC Uplink	N/A	2593.00	40620	Mid	right	10 mm	LTE Band 41	B	0982M	20	QPSK	1	99	22.0	21.60	0	0.03	1:1.58	0.148	1.096	0.162	
1 CC Uplink	N/A	2593.00	40620	Mid	right	10 mm	LTE Band 41	B	0982M	20	QPSK	50	25	22.0	21.69	0	-0.01	1:1.58	0.154	1.074	0.165	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 80 of 95

REV 22.0
03/30/2022

**Table 11-35
NR Band n5 Hotspot SAR**

MEASUREMENT RESULTS																					
FREQUENCY			Side	Spacing	Mode	Antenna Config	Serial Number	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #
MHz	Ch.																				
836.50	167300	Md	back	10 mm	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	1	104	25.5	23.79	0	-0.01	1:1	0.658	1.483	0.976	A38
836.50	167300	Md	back	10 mm	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	50	28	25.5	23.71	0	-0.03	1:1	0.646	1.510	0.975	
836.50	167300	Md	back	10 mm	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	100	0	24.5	22.90	1	-0.07	1:1	0.541	1.445	0.782	
836.50	167300	Md	back	10 mm	NR Band n5	A	0990M	20	CP-OFDM	QPSK	1	1	24.0	22.34	1.5	0.04	1:1	0.482	1.466	0.707	
836.50	167300	Md	front	10 mm	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	1	104	25.5	23.79	0	0.02	1:1	0.293	1.483	0.435	
836.50	167300	Md	front	10 mm	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	50	28	25.5	23.71	0	-0.07	1:1	0.289	1.510	0.436	
836.50	167300	Md	bottom	10 mm	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	1	104	25.5	23.79	0	-0.07	1:1	0.357	1.483	0.529	
836.50	167300	Md	bottom	10 mm	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	50	28	25.5	23.71	0	0.00	1:1	0.348	1.510	0.525	
836.50	167300	Md	right	10 mm	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	1	104	25.5	23.79	0	0.19	1:1	0.061	1.483	0.090	
836.50	167300	Md	right	10 mm	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	50	28	25.5	23.71	0	0.08	1:1	0.073	1.510	0.110	
836.50	167300	Md	left	10 mm	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	1	104	25.5	23.79	0	0.17	1:1	0.217	1.483	0.322	
836.50	167300	Md	left	10 mm	NR Band n5	A	0990M	20	DFT-S-OFDM	QPSK	50	28	25.5	23.71	0	0.02	1:1	0.236	1.510	0.356	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population													Body 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-36
NR Band n41 Hotspot SAR**

MEASUREMENT RESULTS																					
FREQUENCY			Side	Spacing	Mode	Antenna Config	Serial Number	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (1g) (W/kg)	Scaling Factor	Reported SAR (1g) (W/kg)	Plot #
MHz	Ch.																				
2592.99	518598	Md	back	10 mm	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	1	137	19.0	18.39	0	0.05	1:1	0.184	1.151	0.212	
2592.99	518598	Md	back	10 mm	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	135	69	19.0	18.42	0	0.06	1:1	0.180	1.143	0.206	
2592.99	518598	Md	front	10 mm	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	1	137	19.0	18.39	0	-0.04	1:1	0.113	1.151	0.130	
2592.99	518598	Md	front	10 mm	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	135	69	19.0	18.42	0	-0.05	1:1	0.114	1.143	0.130	
2592.99	518598	Md	top	10 mm	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	1	137	19.0	18.39	0	-0.08	1:1	0.338	1.151	0.389	
2592.99	518598	Md	top	10 mm	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	135	69	19.0	18.42	0	0.01	1:1	0.333	1.143	0.381	
2592.99	518598	Md	top	10 mm	NR Band n41	F	0993M	100	CP-OFDM	QPSK	1	1	19.0	18.23	0	0.02	1:1	0.423	1.194	0.505	A39
2592.99	518598	Md	left	10 mm	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	1	137	19.0	18.39	0	0.01	1:1	0.034	1.151	0.039	
2592.99	518598	Md	left	10 mm	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	135	69	19.0	18.42	0	-0.17	1:1	0.032	1.143	0.037	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population													Body 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-37
DTS SISO WLAN Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Side	Spacing	Mode	Service	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Data Rate (Mbps)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Maximum Duty Cycle (%)	Duty Cycle (%)	SAR (1g) (W/kg)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) (W/kg)	Plot #
MHz	Ch.																		
2462	11	back	10 mm	802.11b	DSSS	2	0978M	22	1	20.0	19.67	-0.04	100.00	98.90	0.183	1.079	1.011	0.200	
2462	11	front	10 mm	802.11b	DSSS	2	0978M	22	1	20.0	19.67	-0.07	100.00	98.90	0.145	1.079	1.011	0.158	
2462	11	top	10 mm	802.11b	DSSS	2	0978M	22	1	20.0	19.67	-0.17	100.00	98.90	0.006	1.079	1.011	0.007	
2462	11	right	10 mm	802.11b	DSSS	2	0978M	22	1	20.0	19.67	-0.07	100.00	98.90	0.086	1.079	1.011	0.094	
2437	6	back	10 mm	802.11b	DSSS	2	0970M	22	1	14.0	13.81	0.12	100.00	98.90	0.034	1.045	1.011	0.036	
2437	6	front	10 mm	802.11b	DSSS	2	0970M	22	1	14.0	13.81	-0.09	100.00	98.90	0.030	1.045	1.011	0.032	
2437	6	top	10 mm	802.11b	DSSS	2	0970M	22	1	14.0	13.81	0.20	100.00	98.90	0.000	1.045	1.011	0.000	
2437	6	right	10 mm	802.11b	DSSS	2	0970M	22	1	14.0	13.81	-0.09	100.00	98.90	0.016	1.045	1.011	0.017	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population													Body 1.6 W/kg (mW/g) averaged over 1 gram						

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 81 of 95

**Table 11-38
DTS MIMO WLAN Hotspot SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Side	Spacing	Mode	Service	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Data Rate (Mbps)	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Maximum Duty Cycle (%)	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.																(W/kg)			(W/kg)	
2437	6	back	10 mm	802.11b	DSSS	MIMO	0970M	22	1	20.0	19.72	20.0	19.44	0.03	100.00	98.90	0.253	1.138	1.011	0.291	
2437	6	front	10 mm	802.11b	DSSS	MIMO	0970M	22	1	20.0	19.72	20.0	19.44	-0.11	100.00	98.90	0.214	1.138	1.011	0.246	
2437	6	top	10 mm	802.11b	DSSS	MIMO	0970M	22	1	20.0	19.72	20.0	19.44	0.04	100.00	98.90	0.146	1.138	1.011	0.168	
2437	6	right	10 mm	802.11b	DSSS	MIMO	0970M	22	1	20.0	19.72	20.0	19.44	-0.11	100.00	98.90	0.110	1.138	1.011	0.127	
2412	1	left	10 mm	802.11b	DSSS	MIMO	0970M	22	1	20.0	19.68	20.0	19.38	-0.03	100.00	98.90	0.596	1.153	1.011	0.695	
2437	6	left	10 mm	802.11b	DSSS	MIMO	0970M	22	1	20.0	19.72	20.0	19.44	0.04	100.00	98.90	0.668	1.138	1.011	0.769	A40
2462	11	left	10 mm	802.11b	DSSS	MIMO	0970M	22	1	20.0	19.69	20.0	19.40	0.00	100.00	98.90	0.613	1.148	1.011	0.711	
2412	1	back	10 mm	802.11n	OFDM	MIMO	0970M	20	13	14.0	13.85	14.0	13.42	-0.08	100.00	92.20	0.054	1.143	1.085	0.067	
2412	1	front	10 mm	802.11n	OFDM	MIMO	0970M	20	13	14.0	13.85	14.0	13.42	-0.20	100.00	92.20	0.043	1.143	1.085	0.053	
2412	1	top	10 mm	802.11n	OFDM	MIMO	0970M	20	13	14.0	13.85	14.0	13.42	0.05	100.00	92.20	0.019	1.143	1.085	0.024	
2412	1	right	10 mm	802.11n	OFDM	MIMO	0970M	20	13	14.0	13.85	14.0	13.42	0.03	100.00	92.20	0.017	1.143	1.085	0.021	
2412	1	left	10 mm	802.11n	OFDM	MIMO	0970M	20	13	14.0	13.85	14.0	13.42	-0.07	100.00	92.20	0.134	1.143	1.085	0.166	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Body 1.6 W/kg (mW/g) averaged over 1 gram										

Note: At max power, to achieve the 23.0 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 20.0 dBm. During simultaneous conditions with 5/6 GHz WLAN and/or 5G NR, to achieve the 17.0 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 14.0 dBm.

**Table 11-39
NII MIMO WLAN Hotspot SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Side	Spacing	Mode	Service	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Data Rate (Mbps)	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Maximum Duty Cycle (%)	Duty Cycle (%)	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.																(W/kg)			(W/kg)	
5785	157	back	10 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.20	17.5	17.14	0.05	100.00	92.87	0.239	1.086	1.077	0.280	A41
5785	157	front	10 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.20	17.5	17.14	-0.10	100.00	92.87	0.076	1.086	1.077	0.089	
5785	157	top	10 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.20	17.5	17.14	-0.18	100.00	92.87	0.138	1.086	1.077	0.161	
5785	157	right	10 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.20	17.5	17.14	0.01	100.00	92.87	0.064	1.086	1.077	0.075	
5785	157	left	10 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.20	17.5	17.14	0.04	100.00	92.87	0.127	1.086	1.077	0.149	
5775	155	back	10 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.55	13.0	12.21	0.20	100.00	92.21	0.064	1.199	1.084	0.083	
5775	155	front	10 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.55	13.0	12.21	0.08	100.00	92.21	0.018	1.199	1.084	0.023	
5775	155	top	10 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.55	13.0	12.21	0.08	100.00	92.21	0.052	1.199	1.084	0.068	
5775	155	right	10 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.55	13.0	12.21	0.09	100.00	92.21	0.026	1.199	1.084	0.034	
5775	155	left	10 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.55	13.0	12.21	0.07	100.00	92.21	0.038	1.199	1.084	0.049	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Body 1.6 W/kg (mW/g) averaged over 1 gram										

Note: At max power, to achieve the 20.5 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 17.5 dBm. During simultaneous conditions with 2.4 GHz WLAN and/or 5G NR, to achieve the 16.0 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 13.0 dBm.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 82 of 95



**Table 11-40
DSS Hotspot SAR**

MEASUREMENT RESULTS																		
FREQUENCY		Side	Spacing	Mode	Service	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Maximum Duty Cycle (%)	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) (W/kg)	Plot #
MHz	Ch.													(W/kg)				
2441	39	back	10 mm	Bluetooth	FHSS	1	0970M	1	18.0	17.99	0.16	79.00	77.09	0.066	1.002	1.025	0.068	
2441	39	front	10 mm	Bluetooth	FHSS	1	0970M	1	18.0	17.99	-0.04	79.00	77.09	0.057	1.002	1.025	0.059	
2441	39	top	10 mm	Bluetooth	FHSS	1	0970M	1	18.0	17.99	-0.04	79.00	77.09	0.032	1.002	1.025	0.033	
2441	39	left	10 mm	Bluetooth	FHSS	1	0970M	1	18.0	17.99	-0.04	79.00	77.09	0.188	1.002	1.025	0.193	A42
2402	0	back	10 mm	Bluetooth	FHSS	2	0970M	1	18.0	17.73	-0.03	79.00	77.03	0.044	1.064	1.026	0.048	
2402	0	front	10 mm	Bluetooth	FHSS	2	0970M	1	18.0	17.73	-0.04	79.00	77.03	0.048	1.064	1.026	0.052	
2402	0	top	10 mm	Bluetooth	FHSS	2	0970M	1	18.0	17.73	-0.09	79.00	77.03	0.003	1.064	1.026	0.003	
2402	0	right	10 mm	Bluetooth	FHSS	2	0970M	1	18.0	17.73	-0.03	79.00	77.03	0.026	1.064	1.026	0.028	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-41
DSS MIMO Hotspot SAR**

MEASUREMENT RESULTS																				
FREQUENCY		Side	Spacing	Mode	Service	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Maximum Duty Cycle (%)	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) (W/kg)	Plot #
tz	Ch.															(W/kg)				
41	39	back	10 mm	Bluetooth	FHSS	MIMO	0970M	1	14.5	14.44	14.5	12.76	-0.17	79.00	77.03	0.051	1.493	1.026	0.078	
41	39	front	10 mm	Bluetooth	FHSS	MIMO	0970M	1	14.5	14.44	14.5	12.76	0.03	79.00	77.03	0.036	1.493	1.026	0.055	
41	39	top	10 mm	Bluetooth	FHSS	MIMO	0970M	1	14.5	14.44	14.5	12.76	0.06	79.00	77.03	0.014	1.493	1.026	0.021	
41	39	right	10 mm	Bluetooth	FHSS	MIMO	0970M	1	14.5	14.44	14.5	12.76	0.07	79.00	77.03	0.014	1.493	1.026	0.021	
41	39	left	10 mm	Bluetooth	FHSS	MIMO	0970M	1	14.5	14.44	14.5	12.76	0.03	79.00	77.03	0.078	1.493	1.026	0.119	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Body 1.6 W/kg (mW/g) averaged over 1 gram											

Note: To achieve the 17.5 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 14.5 dBm.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 83 of 95



11.4 Standalone Phablet SAR Data

Table 11-42
GSM 1900 Phablet SAR Data

MEASUREMENT RESULTS																
FREQUENCY		Side	Spacing	Mode	Service	Antenna Config.	Device Serial Number	# of Time Slots	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.												(W/kg)		(W/kg)	
1880.00	661	bottom	0 mm	GSM 1900	GPRS	A	0968M	4	23.0	21.78	0.00	1:2.076	1.070	1.324	1.417	A43
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Phablet 4.0 W/kg (mW/g) averaged over 10 grams								

Table 11-43
LTE Band 66 (AWS) Phablet SAR

MEASUREMENT RESULTS																				
FREQUENCY		Side	Spacing	Mode	Antenna Config.	Serial Number	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
1720.00	132072	Low	back	0 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	1	99	20.0	19.29	0	-0.02	1:1	1.290	1.178	1.520	
1720.00	132072	Low	back	0 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	50	25	20.0	19.22	0	0.00	1:1	1.310	1.197	1.568	
1720.00	132072	Low	bottom	0 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	1	99	20.0	19.29	0	0.01	1:1	1.550	1.178	1.826	
1720.00	132072	Low	bottom	0 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	50	25	20.0	19.22	0	0.00	1:1	1.590	1.197	1.903	A44
1745.00	132322	Mid	bottom	0 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	50	0	20.0	19.19	0	0.01	1:1	1.540	1.205	1.856	
1770.00	132572	High	bottom	0 mm	LTE Band 66 (AWS)	A	0968M	20	QPSK	50	25	20.0	19.03	0	0.01	1:1	1.340	1.250	1.675	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Phablet 4.0 W/kg (mW/g) averaged over 10 grams												

Table 11-44
LTE Band 2 (PCS) Phablet SAR

MEASUREMENT RESULTS																				
FREQUENCY		Side	Spacing	Mode	Antenna Config.	Serial Number	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #	
MHz	Ch.															(W/kg)		(W/kg)		
1860.00	18700	Low	bottom	0 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	1	99	20.0	18.99	0	0.01	1:1	1.330	1.262	1.678	
1860.00	18700	Low	bottom	0 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	50	50	20.0	18.96	0	-0.01	1:1	1.330	1.271	1.690	
1880.00	18900	Mid	bottom	0 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	50	0	20.0	18.94	0	0.00	1:1	1.340	1.276	1.710	A45
1900.00	19100	High	bottom	0 mm	LTE Band 2 (PCS)	A	0968M	20	QPSK	50	0	20.0	18.88	0	-0.01	1:1	1.330	1.294	1.721	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Phablet 4.0 W/kg (mW/g) averaged over 10 grams												

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 84 of 95

REV 22.0
03/30/2022



**Table 11-45
LTE Band 41 Phablet SAR**

MEASUREMENT RESULTS																						
# CC Uplink	Component Carrier	FREQUENCY		Side	Spacing	Mode	Antenna Config.	Serial Number	Bandwidth [MHz]	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (10g) (W/kg)	Scaling Factor	Reported SAR (10g) (W/kg)	Plot #	
		MHz	Ch.																			
1 CC Uplink	N/A	2506.00	39750	Low	bottom	0 mm	LTE Band 41	B	0982M	20	QPSK	1	50	22.0	21.25	0	0.01	1:1.58	1.500	1.189	1.784	
1 CC Uplink	N/A	2549.50	40185	Low-Mid	bottom	0 mm	LTE Band 41	B	0982M	20	QPSK	1	99	22.0	21.33	0	-0.01	1:1.58	1.370	1.167	1.599	
1 CC Uplink	N/A	2593.00	40620	Mid	bottom	0 mm	LTE Band 41	B	0982M	20	QPSK	1	99	22.0	21.60	0	-0.04	1:1.58	1.400	1.096	1.534	
1 CC Uplink	N/A	2636.50	41055	Mid-High	bottom	0 mm	LTE Band 41	B	0982M	20	QPSK	1	0	22.0	21.34	0	-0.01	1:1.58	1.310	1.164	1.525	
1 CC Uplink	N/A	2680.00	41490	High	bottom	0 mm	LTE Band 41	B	0982M	20	QPSK	1	0	22.0	21.13	0	-0.02	1:1.58	1.140	1.222	1.393	
1 CC Uplink	N/A	2506.00	39750	Low	bottom	0 mm	LTE Band 41	B	0982M	20	QPSK	50	0	22.0	21.35	0	-0.01	1:1.58	1.540	1.161	1.788	A46
1 CC Uplink	N/A	2506.00	39750	Low	bottom	0 mm	LTE Band 41	B	0982M	20	QPSK	50	50	22.0	21.30	0	-0.05	1:1.58	1.440	1.175	1.692	
1 CC Uplink	N/A	2549.50	40185	Low-Mid	bottom	0 mm	LTE Band 41	B	0982M	20	QPSK	50	50	22.0	21.43	0	0.01	1:1.58	1.380	1.140	1.573	
1 CC Uplink	N/A	2593.00	40620	Mid	bottom	0 mm	LTE Band 41	B	0982M	20	QPSK	50	25	22.0	21.69	0	0.00	1:1.58	1.440	1.074	1.547	
1 CC Uplink	N/A	2636.50	41055	Mid-High	bottom	0 mm	LTE Band 41	B	0982M	20	QPSK	50	0	22.0	21.48	0	0.01	1:1.58	1.300	1.127	1.465	
1 CC Uplink	N/A	2680.00	41490	High	bottom	0 mm	LTE Band 41	B	0982M	20	QPSK	50	25	22.0	21.25	0	0.03	1:1.58	1.120	1.189	1.332	
1 CC Uplink	N/A	2593.00	40620	Mid	bottom	0 mm	LTE Band 41	B	0982M	20	QPSK	100	0	22.0	21.55	0	-0.06	1:1.58	1.420	1.109	1.575	
2 CC Uplink	PCC	2506.00	39750	Low	bottom	0 mm	LTE Band 41	B	0982M	20	QPSK	50	0	22.0	21.23	0	0.00	1:1.58	1.450	1.194	1.731	
	SCC	2525.80	39948					B														
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population													Phablet 4.0 W/kg (mW/g) averaged over 10 grams									

**Table 11-46
NR Band n41 Phablet SAR**

MEASUREMENT RESULTS																					
MHz	Ch.	Side	Spacing	Mode	Antenna Config.	Serial Number	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	Maximum Allowed Power [dBm]	Conducted Power [dBm]	MPR [dB]	Power Drift [dB]	Duty Cycle	SAR (10g) (W/kg)	Scaling Factor	Reported SAR (10g) (W/kg)	Plot #	
																					MHz
2592.99	518598	Mid	top	0 mm	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	1	137	19.0	18.39	0	0.01	1:1	1.460	1.151	1.680	
2592.99	518598	Mid	top	0 mm	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	135	69	19.0	18.42	0	0.00	1:1	1.460	1.143	1.669	
2592.99	518598	Mid	top	0 mm	NR Band n41	F	0993M	100	DFT-S-OFDM	QPSK	270	0	19.0	18.31	0	0.00	1:1	1.480	1.172	1.735	
2592.99	518598	Mid	top	0 mm	NR Band n41	F	0993M	100	CP-OFDM	QPSK	1	1	19.0	18.23	0	0.03	1:1	1.680	1.194	2.006	A47
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population													Phablet 4.0 W/kg (mW/g) averaged over 10 grams								

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 85 of 95

**Table 11-47
WLAN MIMO Phablet SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Side	Spacing	Mode	Service	Antenna Config.	Device Serial Number	Bandwidth [MHz]	Data Rate (Mbps)	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Maximum Duty Cycle (%)	Duty Cycle (%)	SAR (10g) (W/kg)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g) (W/kg)	Plot #
MHz	Ch.																				
5290	58	back	0 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.67	13.0	12.45	0.00	100.00	92.21	0.276	1.135	1.084	0.340	
5290	58	front	0 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.67	13.0	12.45	-0.08	100.00	92.21	0.178	1.135	1.084	0.219	
5290	58	top	0 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.67	13.0	12.45	-0.20	100.00	92.21	0.061	1.135	1.084	0.075	
5290	58	right	0 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.67	13.0	12.45	0.03	100.00	92.21	0.196	1.135	1.084	0.241	
5290	58	left	0 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.67	13.0	12.45	0.01	100.00	92.21	0.482	1.135	1.084	0.593	
5530	106	back	0 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.80	13.0	12.66	0.05	100.00	92.21	0.194	1.081	1.084	0.227	
5530	106	front	0 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.80	13.0	12.66	0.01	100.00	92.21	0.198	1.081	1.084	0.232	
5530	106	top	0 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.80	13.0	12.66	-0.12	100.00	92.21	0.108	1.081	1.084	0.127	
5530	106	right	0 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.80	13.0	12.66	0.09	100.00	92.21	0.226	1.081	1.084	0.285	
5530	106	left	0 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.80	13.0	12.66	0.02	100.00	92.21	0.483	1.081	1.084	0.566	
5855	171	back	0 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.67	13.0	12.47	0.01	100.00	92.21	0.152	1.130	1.084	0.186	
5855	171	front	0 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.67	13.0	12.47	-0.14	100.00	92.21	0.184	1.130	1.084	0.225	
5855	171	top	0 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.67	13.0	12.47	0.05	100.00	92.21	0.134	1.130	1.084	0.164	
5855	171	right	0 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.67	13.0	12.47	0.03	100.00	92.21	0.088	1.130	1.084	0.108	
5855	171	left	0 mm	802.11ac	OFDM	MIMO	0970M	80	58.5	13.0	12.67	13.0	12.47	0.11	100.00	92.21	0.331	1.130	1.084	0.405	
5280	56	back	0 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.31	17.5	17.20	-0.01	100.00	92.87	0.532	1.072	1.077	0.614	
5280	56	front	0 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.31	17.5	17.20	0.01	100.00	92.87	0.370	1.072	1.077	0.427	
5280	56	top	0 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.31	17.5	17.20	-0.04	100.00	92.87	0.182	1.072	1.077	0.210	
5280	56	right	0 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.31	17.5	17.20	0.06	100.00	92.87	0.494	1.072	1.077	0.570	
5280	56	left	0 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.31	17.5	17.20	0.11	100.00	92.87	1.090	1.072	1.077	1.258	
5500	100	back	0 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.40	17.5	17.31	0.08	100.00	92.87	0.528	1.045	1.077	0.594	
5500	100	front	0 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.40	17.5	17.31	0.20	100.00	92.87	0.503	1.045	1.077	0.566	
5500	100	top	0 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.40	17.5	17.31	0.08	100.00	92.87	0.207	1.045	1.077	0.233	
5500	100	right	0 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.40	17.5	17.31	0.02	100.00	92.87	0.568	1.045	1.077	0.639	
5500	100	left	0 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.40	17.5	17.31	-0.12	100.00	92.87	1.220	1.045	1.077	1.373	A48
5865	173	back	0 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.40	17.5	17.20	0.00	100.00	92.87	0.363	1.072	1.077	0.419	
5865	173	front	0 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.40	17.5	17.20	-0.08	100.00	92.87	0.518	1.072	1.077	0.598	
5865	173	top	0 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.40	17.5	17.20	0.06	100.00	92.87	0.288	1.072	1.077	0.333	
5865	173	right	0 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.40	17.5	17.20	0.20	100.00	92.87	0.269	1.072	1.077	0.311	
5865	173	left	0 mm	802.11n	OFDM	MIMO	0970M	20	13	17.5	17.40	17.5	17.20	0.06	100.00	92.87	0.874	1.072	1.077	1.009	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Phablet 4.0 W/kg (mW/g) averaged over 10 grams										

Note: In max power, to achieve the 20.5 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 17.5 dBm. During simultaneous condition with 2.4GHz WLAN and/or 5G NR, to achieve the 16.0 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 13.0 dBm.

**Table 11-48
NFC Phablet SAR**

MEASUREMENT RESULTS									
FREQUENCY	Side	Test Position	Mode	Type	Antenna Config.	Device Serial Number	Power Drift	SAR (10g)	Plot #
								(W/kg)	
13.56	back	0 mm	NFC	B	NFC	0978M	-0.08	0.024	A49
13.56	front	0 mm	NFC	B	NFC	0978M	0.08	0.000	
13.56	right	0 mm	NFC	B	NFC	0978M	0.08	0.000	
13.56	left	0 mm	NFC	B	NFC	0978M	0.01	0.000	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Phablet 4.0 W/kg (mW/g) averaged over 10 grams		

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 86 of 95



11.5 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D04v01.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D04v01.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
8. Per FCC KDB 865664 D01v01r04, variability SAR tests were not required since measured SAR for all frequency bands were less than 0.8 W/kg. Please see Section 12 for variability analysis.
9. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
10. Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the display diagonal dimension is > 150 mm and < 200 mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.
11. Additional SAR tests for phablet SAR were evaluated per KDB 616217 Section 6 (See Section 6.9 for more information).
12. Unless otherwise noted, when 10g SAR measurement is considered, a factor of 2.5 is applied to the 1g thresholds for the equivalent test cases.
13. This device uses Qualcomm Smart Transmit for WWAN operations to control and manage transmitting power in real time to ensure RF Exposure compliance. Per FCC Guidance, compliance for was assessed at the minimum of the time averaged power and the maximum output power for each band/mode/exposure condition (DSI).

GSM Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D04v01, if the reported (scaled) SAR measured at the highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s).

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 87 of 95

REV 22.0
03/30/2022



UMTS Notes:

1. UMTS mode was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D04v01, if the reported (scaled) SAR measured at the highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s).

LTE Notes:

1. LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 8.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D04v01, when the reported 1g SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for LTE B41, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
6. Per KDB Publication 941225 D05Av01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
7. For LTE Band 41, per FCC guidance, SAR was first measured with only a single carrier active in the uplink (carrier aggregation not active). For each exposure condition, the uplink CA scenario with two component carriers was additionally tested for the configuration with the highest SAR when carrier aggregation was not active. The SCC was configured with the closest available contiguous channel. The two component carriers were configured so the resource blocks are physically allocated side by side to achieve the maximum output power.

NR Notes:

1. NR implementation supports NSA mode only. In EN-DC mode, NR operates with the LTE Bands shown in the NR FR1 checklist acting as anchor bands. Per FCC guidance, SAR tests for NR Bands and LTE Anchors Bands were performed separately due to limitations in SAR probe calibration factors.
2. Due to test setup limitations, SAR testing for NR TDD was performed using test mode software to establish the connection.
3. Simultaneous transmission analysis for EN-DC operations is addressed in the Part 2 Test Report (Serial Number can be found in the bibliography).
4. Per FCC Guidance, NR modulations and RB Sizes/Offsets were selected for testing such that configurations with the highest output power were evaluated for SAR tests.
5. Per FCC KDB Publication 447498 D04v01, when the reported NR Band n41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations and > 1.5 W/kg for 10g evaluation, testing at the other channels was required for such test configurations.
6. For final implementation, NR Band n41 slot configuration is synchronized using maximum duty cycle of 100%. SAR testing was performed using FTM mode with a 100% duty cycle applied to match final duty cycle.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 88 of 95

REV 22.0
03/30/2022



WLAN Notes:

1. For held-to-ear, hotspot, and phablet operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg for 1g evaluations, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n/ax) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.6.5 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 8.6.6 for more information.
4. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D04v01 by either evaluating the sum of the 1g SAR values of each antenna transmitting independently or making a SAR measurement with both antennas transmitting simultaneously. Please see Multi-TX and Antenna SAR Considerations Appendix for complete analysis.
5. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
6. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.
7. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

Bluetooth Notes:

1. Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 79% transmission duty factor for Bluetooth and 87% transmission duty factor for Bluetooth LE to determine compliance. See RF Conducted Power Section for the time domain plot and calculation for the duty factor of the device.
2. Head and Hotspot Bluetooth SAR were evaluated for BT BDR tethering applications.
3. The highest frame average power configurations for both Bluetooth and Bluetooth LE were evaluated for SAR. The worst case configuration was used for the remaining test positions as the most conservative scenario.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 89 of 95

REV 22.0
03/30/2022

12 SAR MEASUREMENT VARIABILITY

12.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01, SAR measurement variability is assessed when the highest measured SAR is ≥ 0.80 W/kg. Since all measured SAR values are < 0.80 W/kg for this device, SAR measurement variability was not assessed.

12.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for 1g and < 3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 90 of 95

REV 22.0
03/30/2022

13 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E4404B	Spectrum Analyzer	N/A	N/A	N/A	MY45113242
Agilent	E4438C	ESG Vector Signal Generator	5/10/2022	Annual	5/10/2023	MY42082659
Agilent	E4438C	ESG Vector Signal Generator	2/14/2022	Annual	2/14/2023	MY42082385
Agilent	N5182A	MXG Vector Signal Generator	11/30/2022	Annual	11/30/2023	MY47420603
Agilent	N5182A	MXG Vector Signal Generator	7/4/2022	Annual	7/4/2023	MY48180366
Agilent	8753ES	S-Parameter Vector Network Analyzer	2/11/2022	Annual	2/11/2023	MY40003841
Agilent	8753ES	S-Parameter Vector Network Analyzer	12/17/2021	Annual	12/17/2022	MY40000670
Agilent	E5515C	Wireless Communications Test Set	5/12/2022	Annual	5/12/2023	GB43304278
Agilent	E5515C	Wireless Communications Test Set	1/14/2020	Triennial	1/14/2023	GB43304447
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB46170464
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433972
Amplifier Research	15S1G6	Amplifier	CBT	N/A	CBT	433971
Amplifier Research	150A100C	Amplifier	CBT	N/A	CBT	350132
Anritsu	ML2496A	Power Meter	8/16/2022	Annual	8/16/2023	1351001
Anritsu	ML2495A	Power Meter	3/17/2022	Annual	3/17/2023	941001
Anritsu	ML2496A	Power Meter	3/31/2022	Annual	3/31/2023	1138001
Anritsu	ML2496A	Power Meter	3/29/2022	Annual	3/29/2023	1306009
Anritsu	ML2496A	Power Meter	2/11/2022	Annual	2/11/2023	1405003
Anritsu	MA2411B	Pulse Power Sensor	10/21/2022	Annual	10/21/2023	1207364
Anritsu	MA2411B	Pulse Power Sensor	10/20/2022	Annual	10/20/2023	1339018
Anritsu	MT8821C	Radio Communication Analyzer MT8821C	11/28/2022	Annual	11/28/2023	6262150047
Anritsu	MT8821C	Radio Communication Analyzer MT8821C	6/27/2022	Annual	6/27/2023	6261895213
Anritsu	MT8821C	Radio Communication Analyzer MT8821C	5/24/2022	Annual	5/24/2023	6201144418
Anritsu	MT8821C	Radio Communication Analyzer MT8821C	3/21/2022	Annual	3/21/2023	6201664756
Anritsu	MT8000A	Radio Communication Test Station	9/29/2022	Annual	9/29/2023	6272337438
Anritsu	MT8000A	Radio Communication Test Station	8/3/2022	Annual	8/3/2023	6272337405
Anritsu	MT8000A	Radio Communication Test Station	4/15/2022	Annual	4/15/2023	6272337439
Anritsu	MA24106A	USB Power Sensor	10/21/2022	Annual	10/21/2023	1231538
Anritsu	MA24106A	USB Power Sensor	7/4/2022	Annual	7/4/2023	1245112
Mini-Circuits	PWR-4GHS	USB Power Sensor	11/11/2022	Annual	11/11/2023	11710030062
Control Company	4352	Long Stem Thermometer	9/10/2021	Biennial	9/10/2023	210774678
Control Company	4352	Long Stem Thermometer	9/10/2021	Biennial	9/10/2023	210774685
Control Company	4040	Therm. / Clock/ Humidity Monitor	1/21/2022	Annual	1/21/2023	1605744418
Mitsuyo	S90-196-30	CD-6/ASX Grech Digital Caliper	2/16/2022	Triennial	2/16/2025	A20238413
Keysight Technologies	NE705B	DC Power Analyzer	5/5/2021	Triennial	5/5/2024	MY53004059
Keysight Technologies	N9020A	MXA Signal Analyzer	3/4/2022	Annual	3/4/2023	US46470561
Keysight Technologies	N9020A	MXA Signal Analyzer	4/14/2022	Annual	4/14/2023	MY48010233
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
Mini-Circuits	VL6-6000+	Low Pass Filter DC to 6000 MHz	CBT	N/A	CBT	31634
Mini-Circuits	VL6-6000+	Low Pass Filter DC to 6000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	ZUDC10-83-5+	Directional Coupler	CBT	N/A	CBT	2050
Mini-Circuits	ZUDC10-83-5+	Directional Coupler	CBT	N/A	CBT	2111
Narda	4772-3	Attenuator (dB)	CBT	N/A	CBT	9406
Narda	BW-53W2	Attenuator (dB)	CBT	N/A	CBT	120
Sectionk	TSF-100	Torque Wrench	7/11/2022	Annual	7/11/2023	47639-29
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/30/2022	Annual	11/30/2023	128615
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	8/26/2022	Annual	8/26/2023	166818
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	9/6/2022	Annual	9/6/2023	167286
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	9/1/2022	Annual	9/1/2023	128636
SPEAG	DAK-12	Dielectric Assessment Kit (4MHz - 3GHz)	3/21/2022	Annual	3/21/2023	1102
SPEAG	DAK-3.5	Dielectric Assessment Kit	12/15/2022	Annual	12/15/2023	1278
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	8/15/2022	Annual	8/15/2023	1041
SPEAG	DAKS-3.5	Portable Dielectric Assessment Kit	7/5/2022	Annual	7/5/2023	1039
SPEAG	MAIA	Modulation and Audio Interference Analyzer	N/A	N/A	N/A	1379
SPEAG	CLA-13	Confined Loop Antenna	9/13/2022	Annual	9/13/2023	1002
SPEAG	D750V3	750 MHz SAR Dipole	5/9/2022	Annual	5/9/2023	1003
SPEAG	D835V2	835 MHz SAR Dipole	1/21/2021	Biennial	1/21/2023	44132
SPEAG	D835V2	835 MHz SAR Dipole	5/9/2022	Annual	5/9/2023	44180
SPEAG	D835V2	835 MHz SAR Dipole	4/14/2022	Annual	4/14/2023	44119
SPEAG	D1750V2	1750 MHz SAR Dipole	10/22/2021	Biennial	10/22/2023	1150
SPEAG	D1900V2	1900 MHz SAR Dipole	2/21/2022	Annual	2/21/2023	50148
SPEAG	D1900V2	1900 MHz SAR Dipole	8/8/2022	Annual	8/8/2023	50800
SPEAG	D2450V2	2450 MHz SAR Dipole	11/15/2022	Annual	11/15/2023	797
SPEAG	D2450V2	2450 MHz SAR Dipole	8/18/2021	Biennial	8/18/2023	719
SPEAG	D2450V2	2450 MHz SAR Dipole	11/25/2021	Biennial	11/25/2023	981
SPEAG	D2600V2	2600 MHz SAR Dipole	11/15/2022	Annual	11/15/2023	1071
SPEAG	D2600V2	2600 MHz SAR Dipole	4/14/2021	Biennial	4/14/2023	1004
SPEAG	D560Hv2	5 GHz SAR Dipole	1/10/2022	Annual	1/10/2023	1057
SPEAG	DAE4	Dasy Data Acquisition Electronics	5/16/2022	Annual	5/16/2023	1502
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/23/2022	Annual	2/23/2023	1415
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/14/2022	Annual	6/14/2023	1532
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/18/2022	Annual	7/18/2023	1677
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/14/2022	Annual	6/14/2023	1334
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/18/2022	Annual	7/18/2023	1583
SPEAG	DAE4	Dasy Data Acquisition Electronics	3/16/2022	Annual	3/16/2023	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	10/17/2022	Annual	10/17/2023	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/21/2022	Annual	2/21/2023	1645
SPEAG	DAE4	Dasy Data Acquisition Electronics	1/14/2022	Annual	1/14/2023	1558
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/13/2022	Annual	4/13/2023	1407
SPEAG	EX3Dv4	SAR Probe	6/9/2022	Annual	6/9/2023	7402
SPEAG	EX3Dv4	SAR Probe	2/21/2022	Annual	2/21/2023	7488
SPEAG	EX3Dv4	SAR Probe	6/29/2022	Annual	6/29/2023	7491
SPEAG	EX3Dv4	SAR Probe	7/18/2022	Annual	7/18/2023	7406
SPEAG	EX3Dv4	SAR Probe	6/16/2022	Annual	6/16/2023	7409
SPEAG	EX3Dv4	SAR Probe	7/19/2022	Annual	7/19/2023	7410
SPEAG	EX3Dv4	SAR Probe	3/21/2022	Annual	3/21/2023	7527
SPEAG	EX3Dv4	SAR Probe	10/19/2022	Annual	10/19/2023	7547
SPEAG	EX3Dv4	SAR Probe	1/19/2022	Annual	1/19/2023	7570
SPEAG	EX3Dv4	SAR Probe	4/20/2022	Annual	4/20/2023	7659
SPEAG	EX3Dv4	SAR Probe	3/24/2022	Annual	3/24/2023	7640

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements. Note: All equipment was used solely within its respective calibration period.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 91 of 95

14 MEASUREMENT UNCERTAINTIES

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	7	N	1	1	1	7.0	7.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	E.2.3	2	R	1.732	1	1	1.2	1.2	∞
Linearity	E.2.4	0.3	N	1	1	1	0.3	0.3	∞
System Detection Limits	E.2.4	0.25	R	1.732	1	1	0.1	0.1	∞
Modulation Response	E.2.5	4.8	R	1.732	1	1	2.8	2.8	∞
Readout Electronics	E.2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time	E.2.7	0.8	R	1.732	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E.6.1	3	R	1.732	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	3	R	1.732	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.8	R	1.732	1	1	0.5	0.5	∞
Probe Positioning w/ respect to Phantom	E.6.3	6.7	R	1.732	1	1	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	4	R	1.732	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E.4.2	3.12	N	1	1	1	3.1	3.1	35
Device Holder Uncertainty	E.4.1	1.67	N	1	1	1	1.7	1.7	5
Output Power Variation - SAR drift measurement	E.2.9	5	R	1.732	1	1	2.9	2.9	∞
SAR Scaling	E.6.5	0	R	1.732	1	1	0.0	0.0	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	E.3.3	4.3	N	1	0.78	0.71	3.3	3.0	76
Liquid Permittivity - measurement uncertainty	E.3.3	4.2	N	1	0.23	0.26	1.0	1.1	75
Liquid Conductivity - Temperature Uncertainty	E.3.4	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	E.3.4	0.6	R	1.732	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)	RSS						12.2	12.0	191
Expanded Uncertainty (95% CONFIDENCE LEVEL)	k=2						24.4	24.0	

The above measurement uncertainties are according to IEEE Std. 1528-2013

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 92 of 95

REV 22.0
03/30/2022

15 CONCLUSION

15.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 93 of 95

REV 22.0
03/30/2022

16 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 94 of 95

REV 22.0
03/30/2022



- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D04
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: A3LSMS918JPN	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2212080137-20.A3L	DUT Type: Portable Handset	Page 95 of 95

REV 22.0
03/30/2022