

APPENDIX A: SAR TEST PLOTS

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0959M

Communication System: UID 0, _GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
Medium: 835 Head; Medium parameters used (interpolated):
 $f = 824.2$ MHz; $\sigma = 0.864$ S/m; $\epsilon_r = 41.205$; $\rho = 1000$ kg/m³
Phantom section: Left Section; Space: 0.00 mm

Test Date: 12/19/2022; Ambient Temp: 21.1°C; Tissue Temp: 19.4°C

Probe: EX3DV4 - SN7491; ConvF(9.85, 9.85, 9.85) @ 824.2 MHz; Calibrated: 6/29/2022
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1532; Calibrated: 6/14/2022
Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1626
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Mode: GSM 850, Left Head, Cheek, Low.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.68 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.190 W/kg

SAR(1 g) = 0.153 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 81.2%

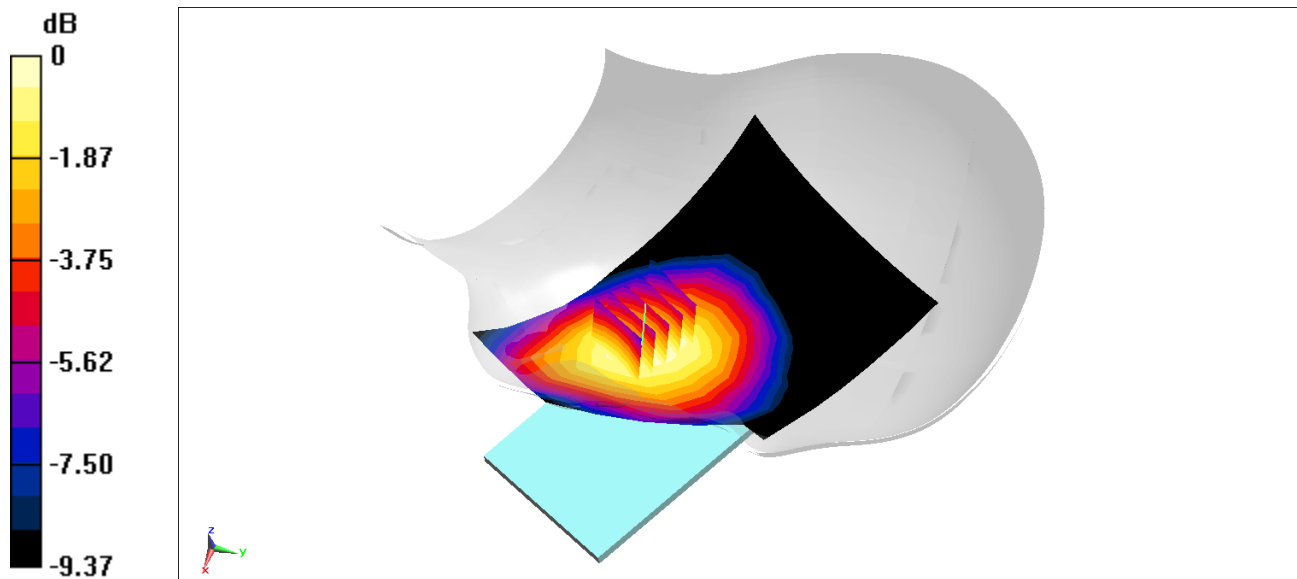

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0973M

Communication System: UID:10021 - DAC, GSM; MAIA: Y; Frequency: 1850.2 MHz

Medium: 1900 Head; Medium parameters used:

f = 1850.2 MHz; cond = 1.40 S/m; perm = 41.4; density = 1000 kg/m³

Phantom Section: RightHead; Space: 0.00 mm

Test Date: 12/19/2022; Ambient Temp: 18.8°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7409; ConvF:(8.13,8.13,8.13); Calibrated: 2022-06-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1334; Calibrated: 2022-06-14

Phantom: Twin-SAM V5.0; Serial: 1792

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: GSM 1900, Right Head, Cheek, Low Ch.

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.04 W/kg; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.072 W/kg

SAR(1 g) = 0.047 W/kg

Smallest distance from peaks to all points 3 dB below is 13.4 mm

Ratio of SAR at M2 to SAR at M1 = 88.3 %

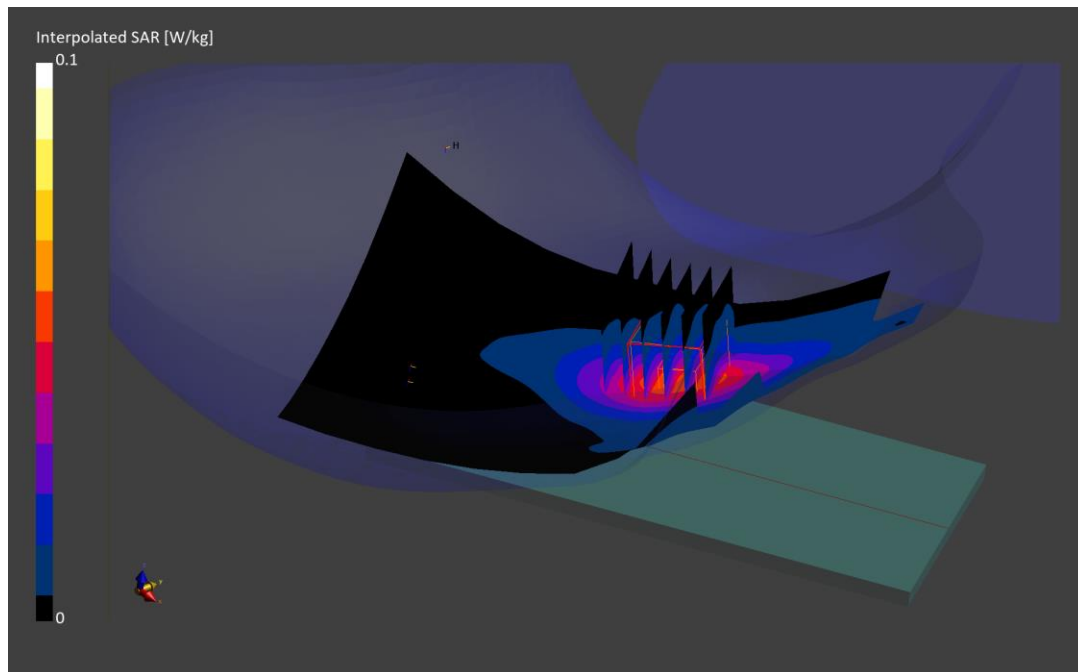

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0959M

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used (interpolated):
 $f = 836.6$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 41.169$; $\rho = 1000$ kg/m³
Phantom section: Left Section; Space: 0.00 mm

Test Date: 12/19/2022; Ambient Temp: 21.1°C; Tissue Temp: 19.4°C

Probe: EX3DV4 - SN7491; ConvF(9.85, 9.85, 9.85) @ 836.6 MHz; Calibrated: 6/29/2022
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1532; Calibrated: 6/14/2022
Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1626
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

Mode: UMTS 850, Left Head, Cheek, Mid.ch

Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 15.63 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.253 W/kg

SAR(1 g) = 0.200 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 80%

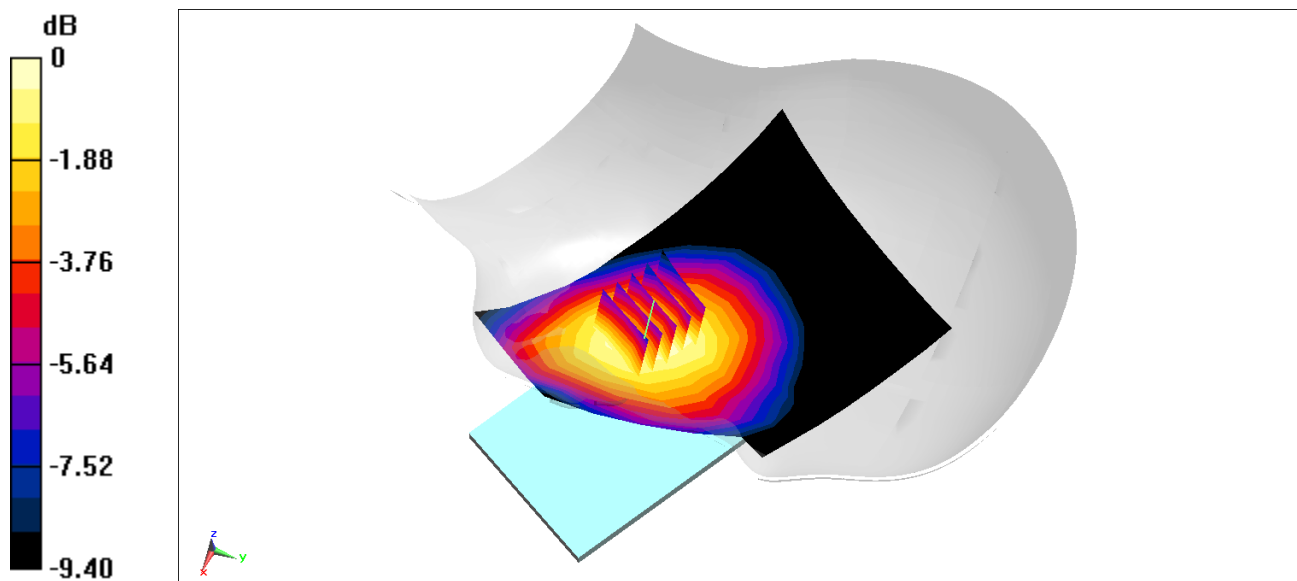

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0959M

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: 750 Head; Medium parameters used (interpolated):
 $f = 707.5$ MHz; $\sigma = 0.854$ S/m; $\epsilon_r = 43.125$; $\rho = 1000$ kg/m³
Phantom section: Left Section; Space: 0.00 mm

Test Date: 12/21/2022; Ambient Temp: 21.5°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7402; ConvF(10.57, 10.57, 10.57) @ 707.5 MHz; Calibrated: 6/9/2022
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1502; Calibrated: 5/16/2022
Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Mode: LTE Band 12, Left Head, Cheek, Mid.ch, QPSK,
10 MHz Bandwidth, 1 RB, 49 RB Offset**

Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 11.71 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.107 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 78.8%

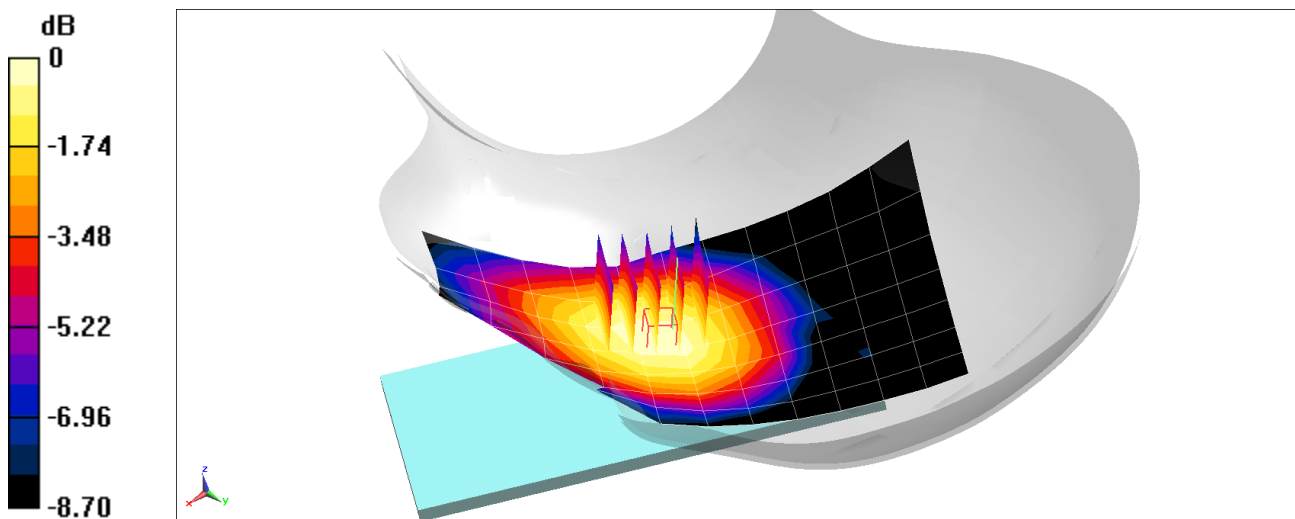

0 dB = 0.123 W/kg = -9.10 dBW/kg

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0959M

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Head; Medium parameters used (interpolated):

$f = 782 \text{ MHz}$; $\sigma = 0.88 \text{ S/m}$; $\epsilon_r = 42.924$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section; Space: 0.00 mm

Test Date: 12/21/2022; Ambient Temp: 21.5°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7402; ConvF(10.57, 10.57, 10.57) @ 782 MHz; Calibrated: 6/9/2022

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1502; Calibrated: 5/16/2022

Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Mode: LTE Band 13, Left Head, Cheek, Mid.ch, QPSK,
10 MHz Bandwidth, 1 RB, 0 RB Offset**

Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 13.58 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.150 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 80.3%

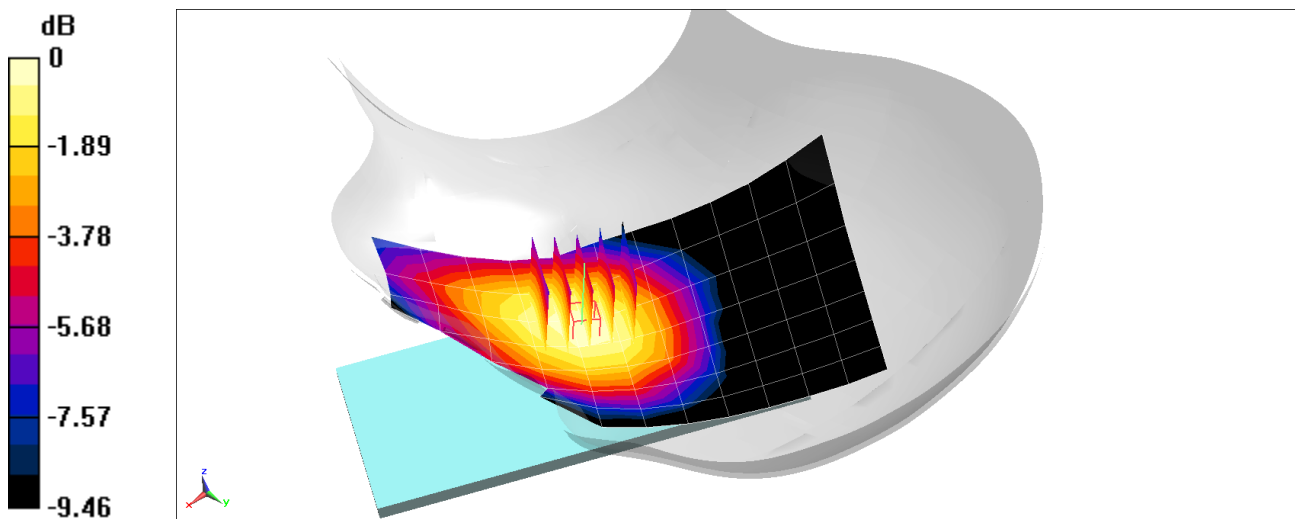

0 dB = 0.175 W/kg = -7.57 dBW/kg

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0959M

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: 835 Head; Medium parameters used (interpolated):
 $f = 831.5$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.764$; $\rho = 1000$ kg/m³
Phantom section: Left Section; Space: 0.00 mm

Test Date: 12/21/2022; Ambient Temp: 21.5°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7402; ConvF(10.22, 10.22, 10.22) @ 831.5 MHz; Calibrated: 6/9/2022
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1502; Calibrated: 5/16/2022
Phantom: Twin-SAM V4.0; Type: QD 000 P40 CC; Serial: 1596
Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

**Mode: LTE Band 26 (Cell.), Left Head, Cheek, Mid.ch,
15 MHz Bandwidth, QPSK, 1 RB, 36 RB Offset**

Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 14.95 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.229 W/kg

SAR(1 g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 22.3 mm

Ratio of SAR at M2 to SAR at M1 = 80.4%

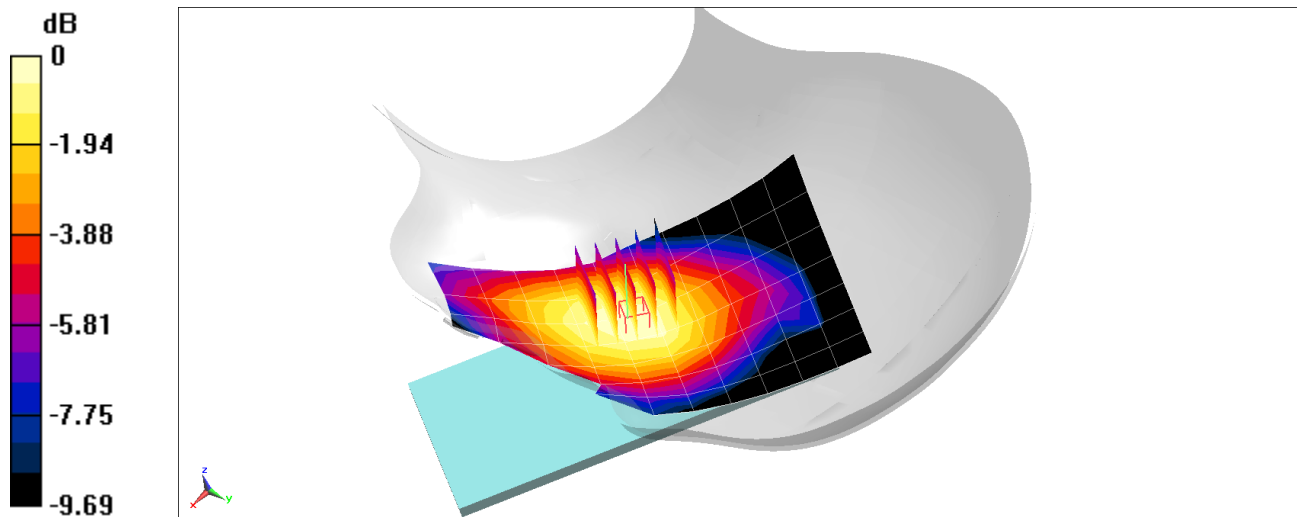

0 dB = 0.211 W/kg = -6.76 dBW/kg

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0968M

Communication System: UID:10169 - CAE, LTE-FDD; MAIA: Y; Frequency: 1745.0 MHz

Medium: 1750 Head; Medium parameters used:

f = 1745.0 MHz; cond = 1.39 S/m; perm = 40.1; density = 1000 kg/m³

Phantom Section: RightHead; Space: 0.00 mm

Test Date: 12/27/2022; Ambient Temp: 21.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7406; ConvF:(8.37,8.37,8.37); Calibrated: 2022-07-18

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1677; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 2064

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 66 (AWS), Right Head, Cheek, Mid Ch.,
20 MHz Bandwidth, QPSK, 1 RB, 50 RB Offset**

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.12 W/kg; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.112 W/kg

Smallest distance from peaks to all points 3 dB below is 12.7 mm

Ratio of SAR at M2 to SAR at M1 = 87.9 %

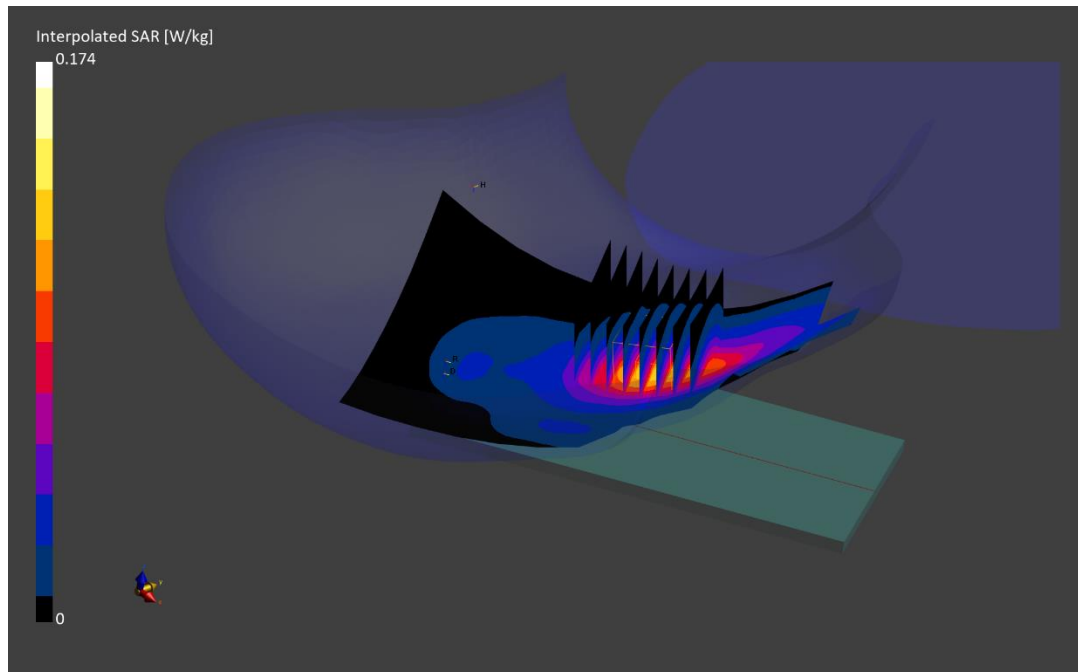

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0973M

Communication System: UID:10169 - CAE, LTE-FDD; MAIA: Y; Frequency: 1860.0 MHz

Medium: 1900 Head; Medium parameters used:

f = 1860.0 MHz; cond = 1.41 S/m; perm = 41.4; density = 1000 kg/m³

Phantom Section: RightHead; Space: 0.00 mm

Test Date: 12/19/2022; Ambient Temp: 18.8°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7409; ConvF:(8.13,8.13,8.13); Calibrated: 2022-06-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1334; Calibrated: 2022-06-14

Phantom: Twin-SAM V5.0; Serial: 1792

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: LTE Band 2, Right Head, Cheek, Low Ch, 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.10 W/kg; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.108 W/kg

Smallest distance from peaks to all points 3 dB below is 14.9 mm

Ratio of SAR at M2 to SAR at M1 = 88.7 %

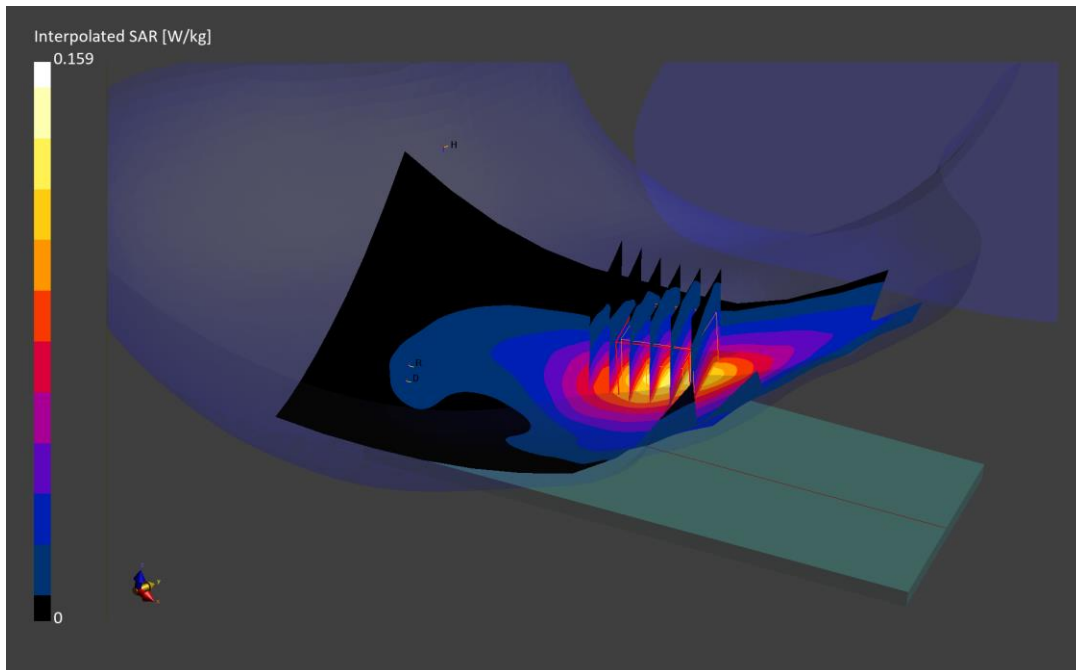

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0982M

Communication System: UID:10435 - AAF, LTE-TDD; MAIA: Y; Frequency: 2593.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2593.0 MHz; cond = 1.98 S/m; perm = 40.3; density = 1000 kg/m³

Phantom Section: LeftHead; Space: 0.00 mm

Test Date: 12/19/2022; Ambient Temp: 21.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7410; ConvF:(7.33,7.33,7.33); Calibrated: 2022-07-19

Sensor-Surface: 1.4mm (All points)

Electronics: DAE4 Sn1583; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 1630

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: LTE Band 41, Left Head, Cheek, Mid Ch., 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.064 W/kg

SAR(1 g) = 0.038 W/kg

Smallest distance from peaks to all points 3 dB below is 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 83.1 %

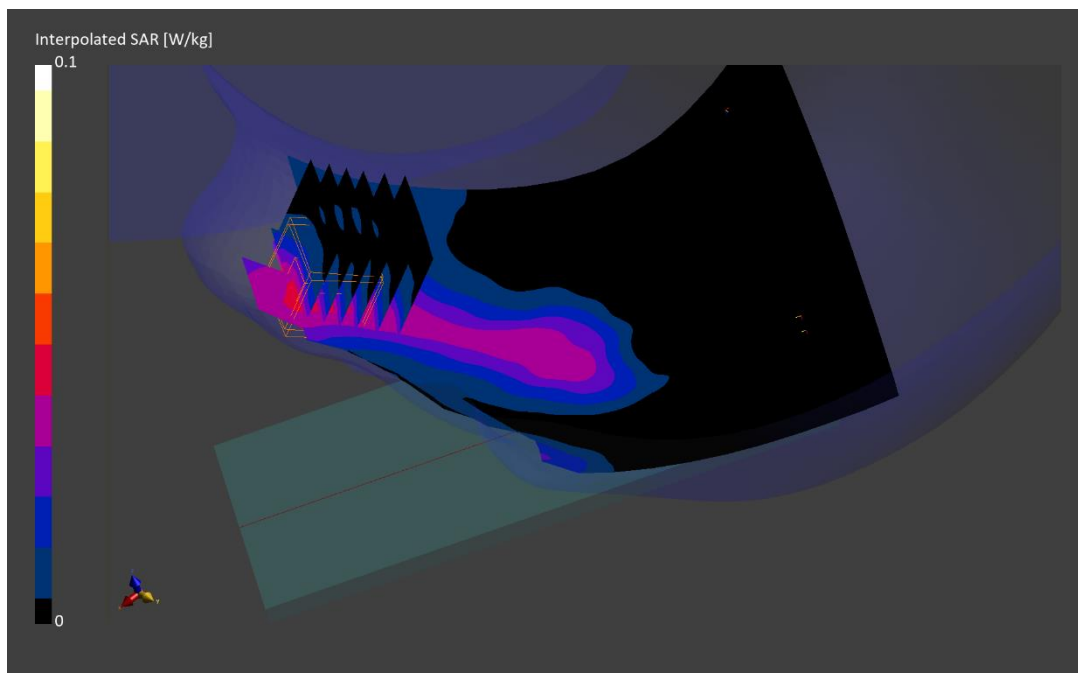

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0990M

Communication System: UID:10939 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 836.5 MHz

Medium: 835 Head; Medium parameters used:

f = 836.5 MHz; cond = 0.872 S/m; perm = 39.7; density = 1000 kg/m³

Phantom Section: LeftHead; Space: 0.00 mm

Test Date: 12/19/2022; Ambient Temp: 20.6°C; Tissue Temp: 20.2°C

Probe: EX3DV4 - SN7488; ConvF:(10.11,10.11,10.11); Calibrated: 2022-02-21

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1415; Calibrated: 2022-02-23

Phantom: Twin-SAM V8.0; Serial: 2065

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: NR Band n5, Left Head, Cheek, Ch. 167300, 20 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 28 RB Offset

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.13 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.127 W/kg

Smallest distance from peaks to all points 3 dB below is > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 93.9 %

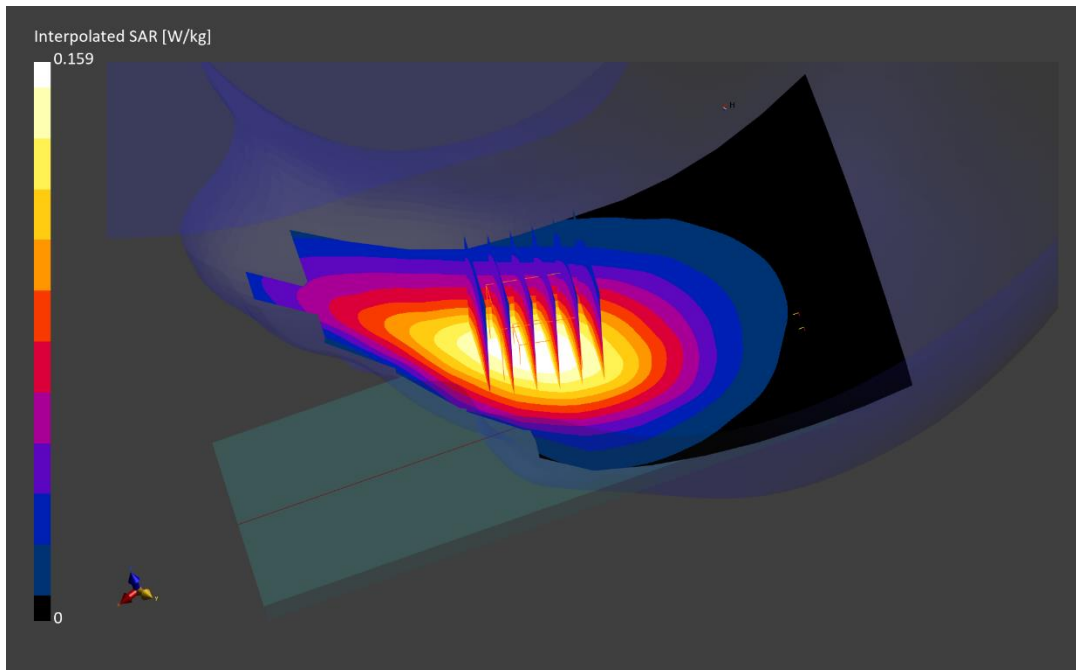

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0993M

Communication System: UID:10803 - AAD, 5G NR FR1 TDD; MAIA: Y; Frequency: 2593.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2593.0 MHz; cond = 1.98 S/m; perm = 40.3; density = 1000 kg/m³

Phantom Section: RightHead; Space: 0.00 mm

Test Date: 12/19/2022; Ambient Temp: 21.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7410; ConvF:(7.33,7.33,7.33); Calibrated: 2022-07-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1583; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 1630

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n41, Antenna F, Right Head, Tilt, Ch. 518598, 100 MHz Bandwidth,
CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.81 W/kg; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 0.715 W/kg

Smallest distance from peaks to all points 3 dB below is 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 76.5 %

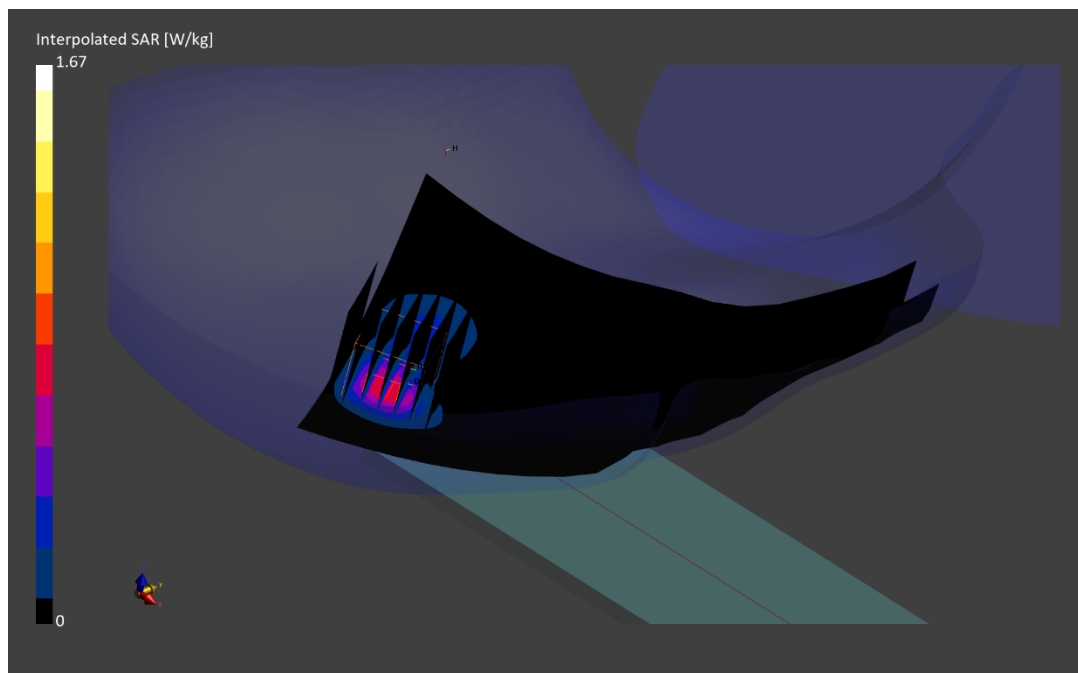

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0970M

Communication System: UID:10591 - AAC, WLAN; MAIA: Y; Frequency: 2412.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2412.0 MHz; cond = 1.84 S/m; perm = 40.6; density = 1000 kg/m³

Phantom Section: RightHead; Space: 0.00 mm

Test Date: 01/05/2023; Ambient Temp: 22.9°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7406; ConvF:(7.72,7.72,7.72); Calibrated: 2022-07-18

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1677; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 2064

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: IEEE 802.11n, MIMO, 20 MHz Bandwidth, Right Head, Cheek, Ch.1, 13 Mbps

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=4.7 mm, dy=4.7 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.30 W/kg; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.774 W/kg

SAR(1 g) = 0.294 W/kg

Smallest distance from peaks to all points 3 dB below is 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 69.8 %

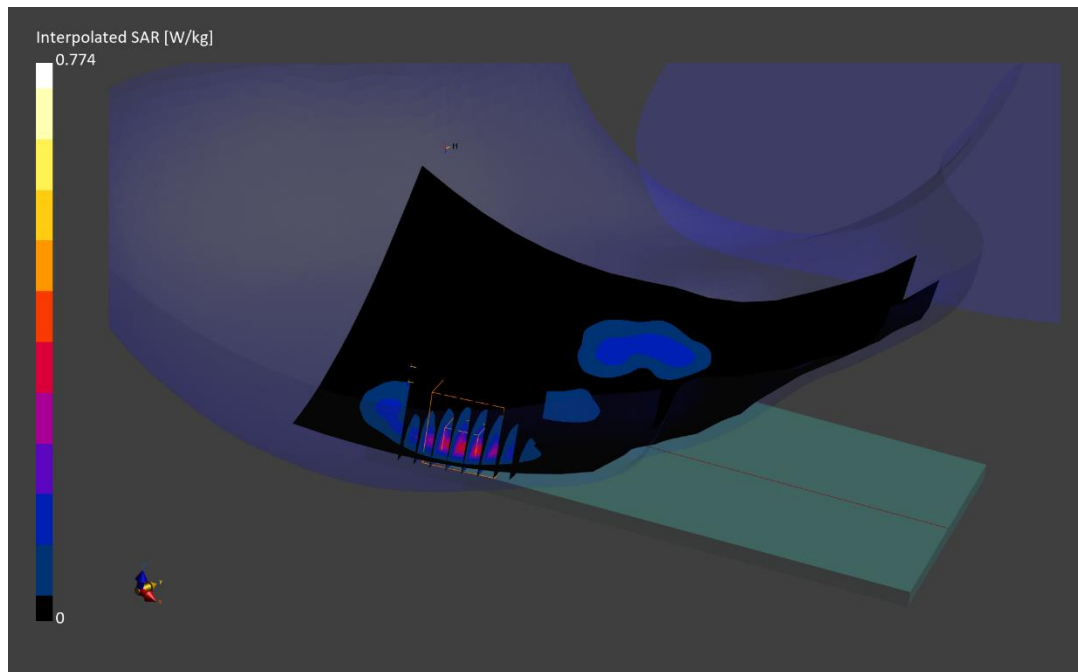

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0978M

Communication System: UID:10626 - AAC, CW; MAIA: Y; Frequency: 5855.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5855.0 MHz; cond = 5.31 S/m; perm = 33.7; density = 1000 kg/m³
Phantom Section: LeftHead; Space: 0.00 mm

Test Date: 01/03/2023; Ambient Temp: 23.4°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7527; ConvF:(4.78,4.78,4.78); Calibrated: 2022-03-21
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1272; Calibrated: 2022-03-16
Phantom: Twin-SAM V5.0; Serial: 1757
Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: IEEE 802.11ac, U-NII-4, MIMO, 80 MHz Bandwidth, Left Head,
Cheek, Ch. 171, 58.5 Mbps**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.62 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.06 W/kg

SAR(1 g) = 0.490 W/kg

Smallest distance from peaks to all points 3 dB below is 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 61.0 %

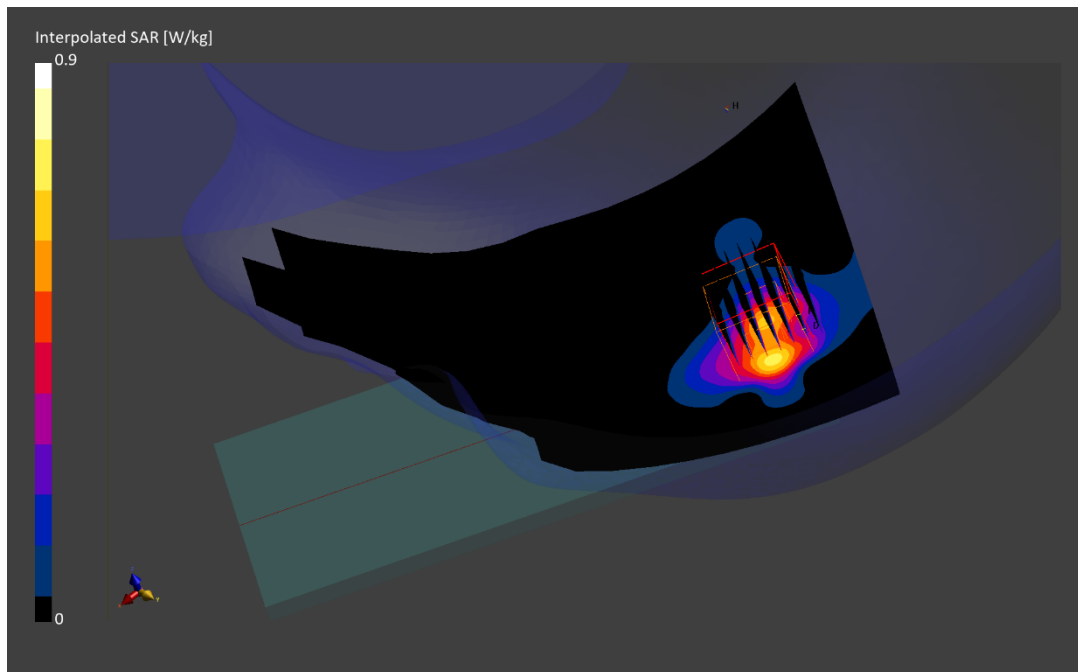

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0970M

Communication System: UID:10032 - CAA, Bluetooth; MAIA: Y; Frequency: 2402.0 MHz

Medium: 2450 Head; Medium parameters used:

f = 2402.0 MHz; cond = 1.83 S/m; perm = 40.6; density = 1000 kg/m³

Phantom Section: RightHead; Space: 0.00 mm

Test Date: 01/05/2023; Ambient Temp: 22.9°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7406; ConvF:(7.72,7.72,7.72); Calibrated: 2022-07-18

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1677; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 2064

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: Bluetooth, Antenna 1, Right Head, Cheek, Ch. 0, 1 Mbps

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.15 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below is 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 74.6 %

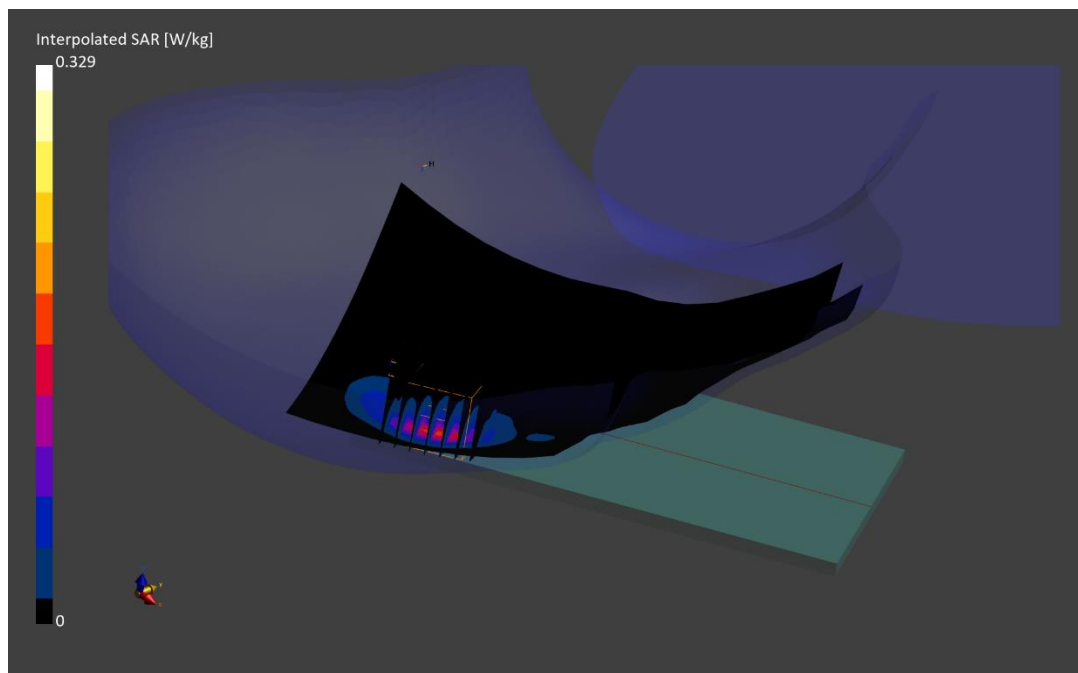

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0959M

Communication System: UID:10021 - DAC, GSM; MAIA: Y; Frequency: 824.2 MHz

Medium: 835 Body; Medium parameters used:

f = 824.2 MHz; cond = 0.997 S/m; perm = 53.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 15.00 mm

Test Date: 12/15/2022; Ambient Temp: 22.5°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7640; ConvF:(10.66,10.66,10.66); Calibrated: 2022-02-24

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1645; Calibrated: 2022-02-21

Phantom: Twin-SAM V5.0; Serial: 1868

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: GSM 850, Body SAR, Back Side, Low Ch.

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.23 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.348 W/kg

SAR(1 g) = 0.237 W/kg

Smallest distance from peaks to all points 3 dB below is 16.7 mm

Ratio of SAR at M2 to SAR at M1 = 86.4 %

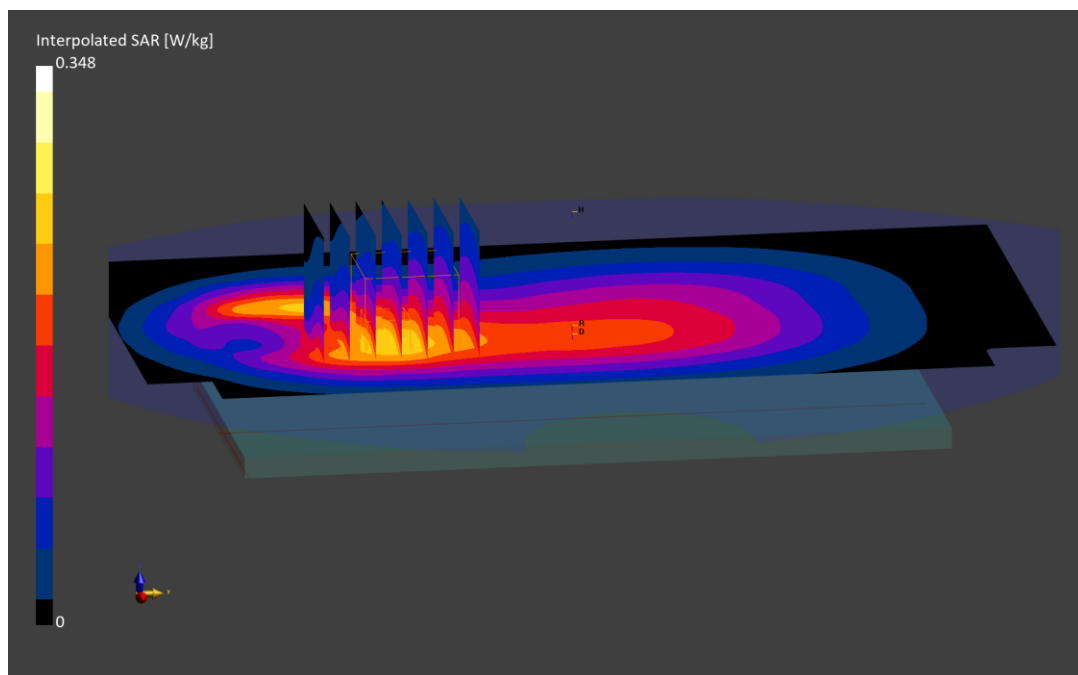

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0968M

Communication System: UID:10021 - DAC, GSM; MAIA: Y; Frequency: 1850.2 MHz

Medium: 1900 Body; Medium parameters used:

f = 1850.2 MHz; cond = 1.49 S/m; perm = 51.8; density = 1000 kg/m³

Phantom Section: Flat; Space: 15.00 mm

Test Date: 12/15/2022; Ambient Temp: 23.9°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7570; ConvF:(8.19,8.19,8.19); Calibrated: 2022-01-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1558; Calibrated: 2022-01-14

Phantom: Twin-SAM V8.0; Serial: 20063

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: GSM 1900, Body SAR, Back Side, Low Ch.

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.14 W/kg; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.237 W/kg

SAR(1 g) = 0.136 W/kg

Smallest distance from peaks to all points 3 dB below is 14.1 mm

Ratio of SAR at M2 to SAR at M1 = 82.7 %

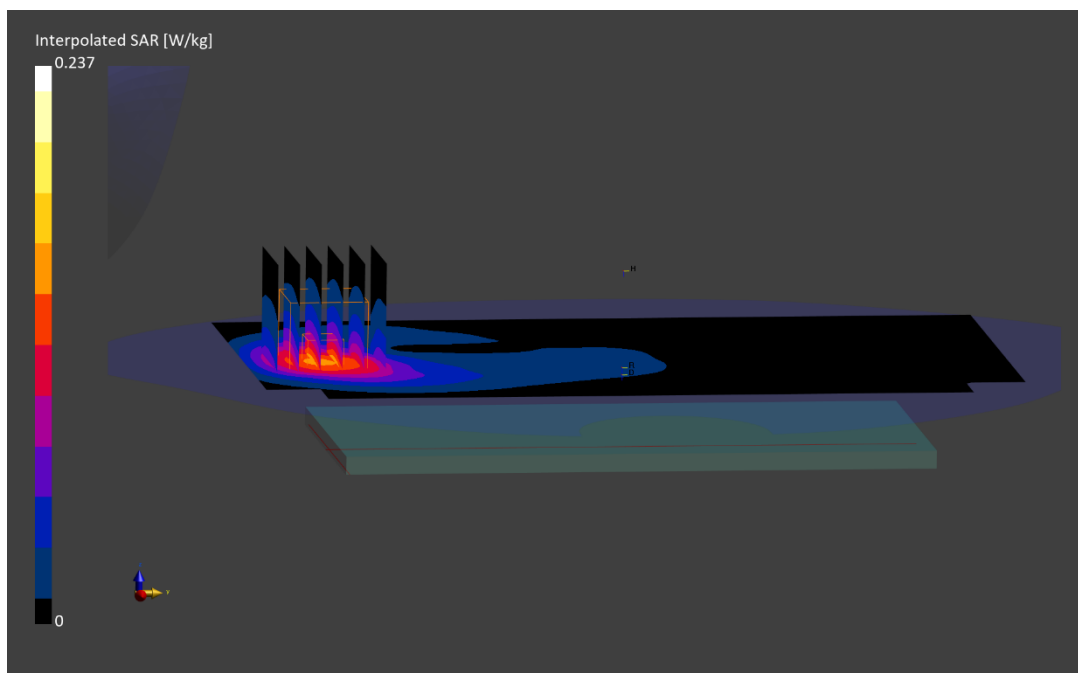

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0958M

Communication System: UID:10011 - CAB, WCDMA; MAIA: Y; Frequency: 836.6 MHz

Medium: 835 Body; Medium parameters used:

f = 836.6 MHz; cond = 0.965 S/m; perm = 54.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 15.00 mm

Test Date: 12/15/2022; Ambient Temp: 21.4°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7547; ConvF:(9.63,9.63,9.63); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: UMTS 850, Body SAR, Back Side, Mid Ch.

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.34 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.451 W/kg

SAR(1 g) = 0.331 W/kg

Smallest distance from peaks to all points 3 dB below is > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 90.6 %

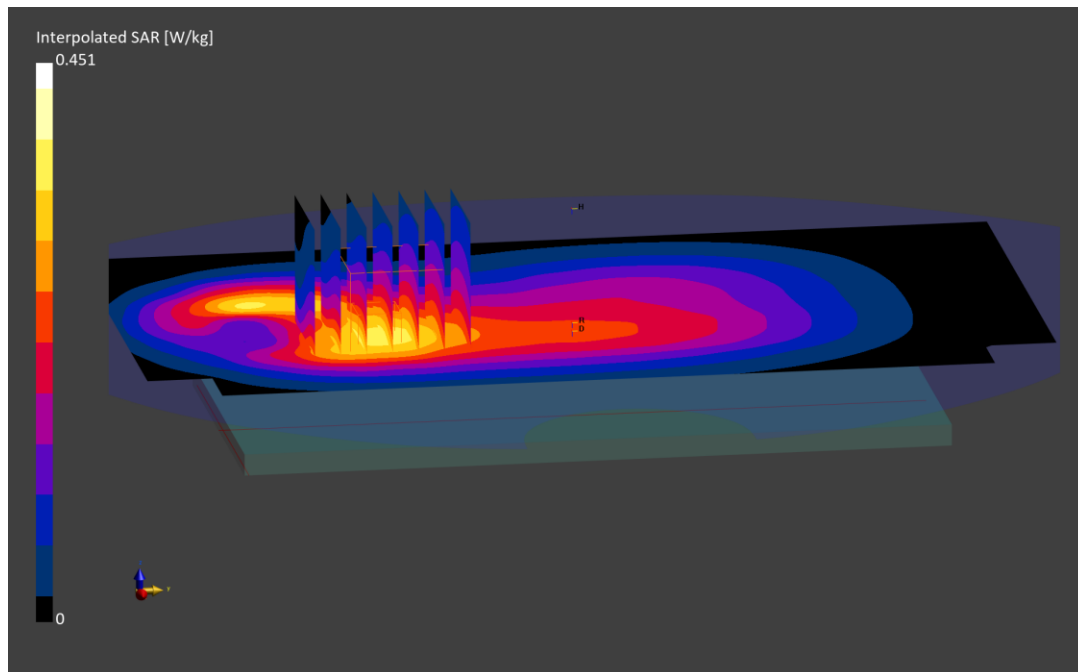

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0959M

Communication System: UID:10175 - CAG, LTE-FDD; MAIA: Y; Frequency: 707.5 MHz

Medium: 750 Body; Medium parameters used:

f = 707.5 MHz; cond = 0.921 S/m; perm = 55.3; density = 1000 kg/m³

Phantom Section: Flat; Space: 15.00 mm

Test Date: 01/02/2023; Ambient Temp: 20.9°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7547; ConvF:(9.87,9.87,9.87); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (All points)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 12, Body SAR, Back Side, Mid Ch,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.19 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.189 W/kg

Smallest distance from peaks to all points 3 dB below is > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.3 %

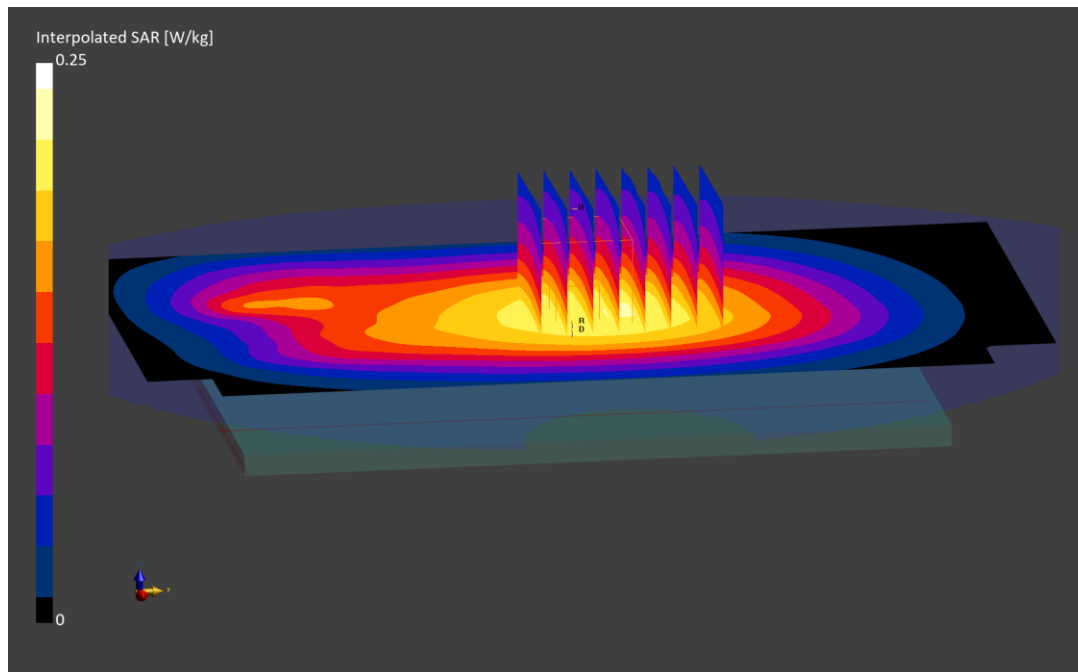

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0959M

Communication System: UID:10175 - CAG, LTE-FDD; MAIA: Y; Frequency: 782.0 MHz

Medium: 750 Body; Medium parameters used:

f = 782.0 MHz; cond = 0.950 S/m; perm = 55.1; density = 1000 kg/m³

Phantom Section: Flat; Space: 15.00 mm

Test Date: 01/02/2023; Ambient Temp: 20.9°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7547; ConvF:(9.87,9.87,9.87); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 13, Body SAR, Back side, Mid Ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.22 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.353 W/kg

SAR(1 g) = 0.222 W/kg

Smallest distance from peaks to all points 3 dB below is 15.6 mm

Ratio of SAR at M2 to SAR at M1 = 86.6 %

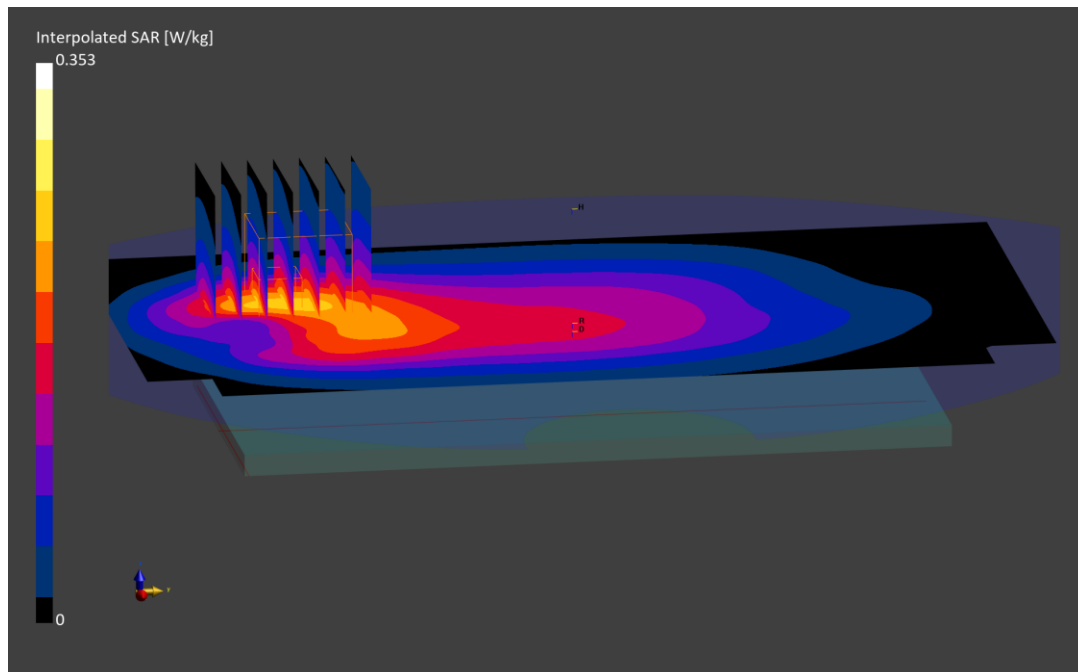

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0958M

Communication System: UID:10181 - CAE, LTE-FDD; MAIA: Y; Frequency: 831.5 MHz

Medium: 835 Body; Medium parameters used:

$f = 831.5$ MHz; $\text{cond} = 0.955$ S/m; $\text{perm} = 54.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 15.00 mm

Test Date: 12/20/2022; Ambient Temp: 20.5°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7547; ConvF:(9.63,9.63,9.63); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 26, Body SAR, Back Side, Mid Ch,
15 MHz Bandwidth, QPSK, 1 RB, 36 RB Offset**

Area Scan (120.0 x 210.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.34 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.522 W/kg

SAR(1 g) = 0.334 W/kg

Smallest distance from peaks to all points 3 dB below is 14.4 mm

Ratio of SAR at M2 to SAR at M1 = 88.4 %

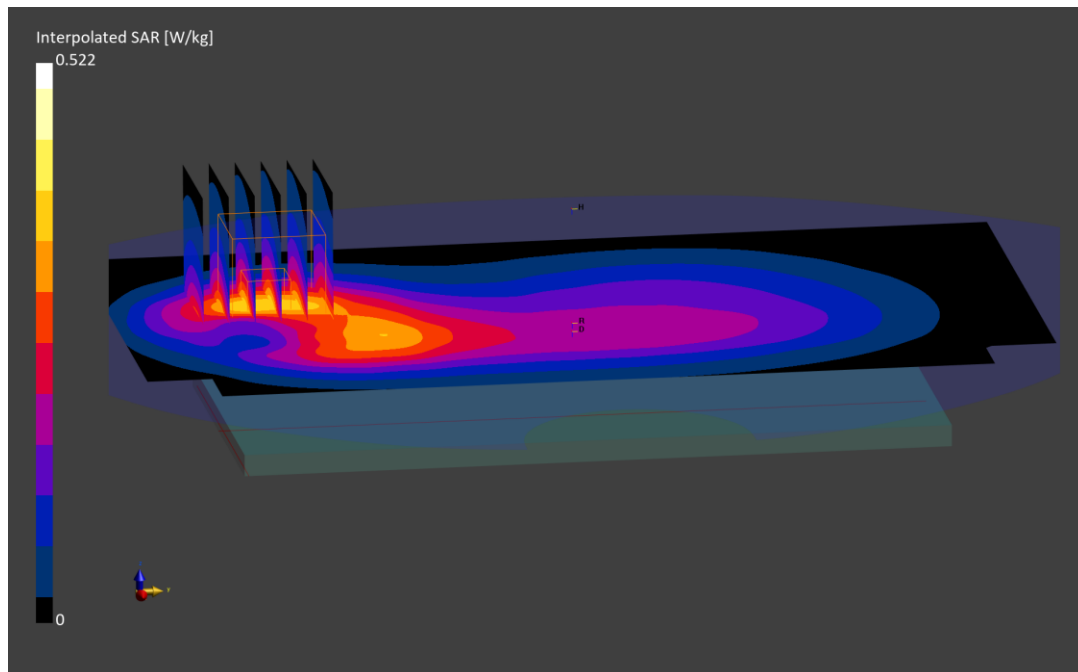

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0968M

Communication System: UID:10169 - CAE, LTE-FDD; MAIA: Y; Frequency: 1720.0 MHz

Medium: 1750 Body; Medium parameters used:

f = 1720.0 MHz; cond = 1.46 S/m; perm = 51.4; density = 1000 kg/m³

Phantom Section: Flat; Space: 15 mm

Test Date: 12/19/2022; Ambient Temp: 21.5°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7406; ConvF:(8.06,8.06,8.06); Calibrated: 2022-07-18

Sensor-Surface: 1.4mm (All points)

Electronics: DAE4 Sn1677; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 2064

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: LTE Band 66 (AWS), Body SAR, Back Side, Low Ch., 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.18 W/kg; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.332 W/kg

SAR(1 g) = 0.195 W/kg

Smallest distance from peaks to all points 3 dB below is 13.3 mm

Ratio of SAR at M2 to SAR at M1 = 83.4 %

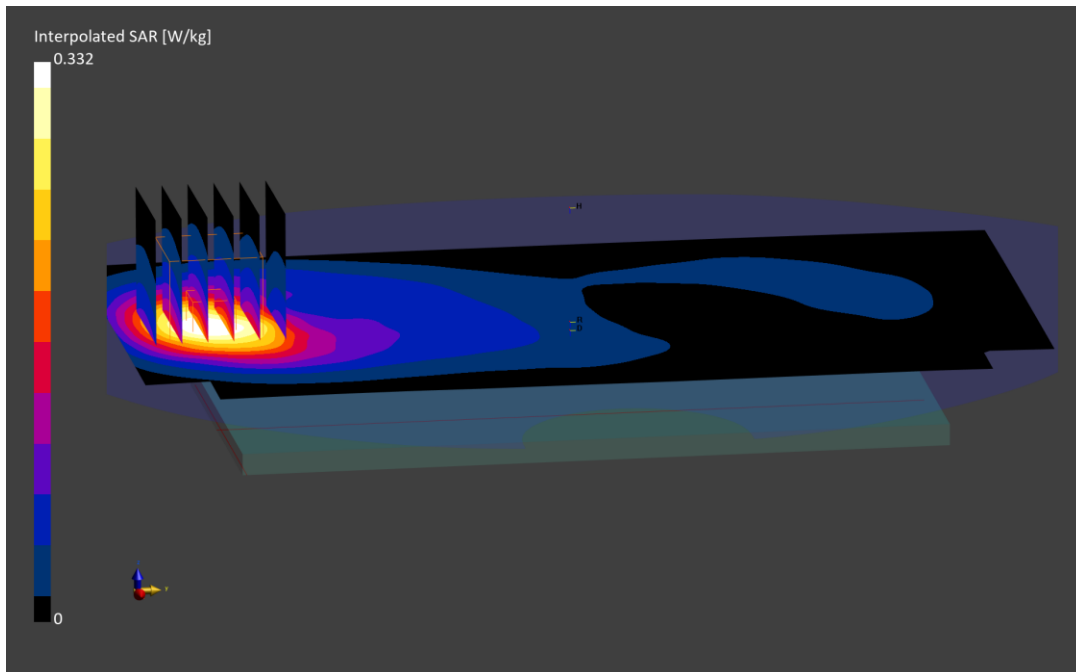

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0968M

Communication System: UID:10297 - AAE, LTE-FDD; MAIA: Y; Frequency: 1860.0 MHz

Medium: 1900 Body; Medium parameters used:

f = 1860.0 MHz; cond = 1.50 S/m; perm = 52.1; density = 1000 kg/m³

Phantom Section: Flat; Space: 15.00 mm

Test Date: 12/13/2022; Ambient Temp: 22.5°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7570; ConvF:(8.19,8.19,8.19); Calibrated: 2022-01-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1558; Calibrated: 2022-01-14

Phantom: Twin-SAM V8.0; Serial: 20063

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 2, Body SAR, Back Side, Low Ch,
20 MHz Bandwidth, QPSK, 50 RB, 50 RB Offset**

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.16 W/kg; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.161 W/kg

Smallest distance from peaks to all points 3 dB below is 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 82.8 %

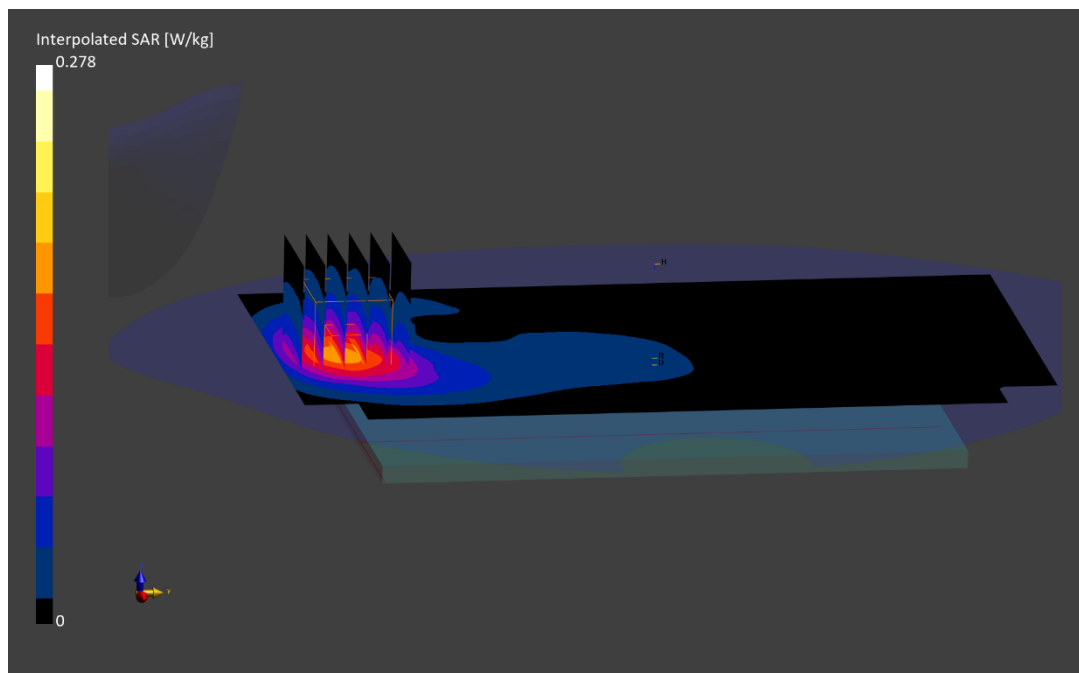

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0982M

Communication System: UID:10494 - AAF, LTE-TDD; MAIA: Y; Frequency: 2593.0 MHz

Medium: 2450 Body; Medium parameters used:

f = 2593.0 MHz; cond = 2.16 S/m; perm = 51.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 15.00 mm

Test Date: 01/03/2023; Ambient Temp: 21.3°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7410; ConvF:(7.45,7.45,7.45); Calibrated: 2022-07-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1583; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 1966

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 41, Body SAR, Back Side, Mid Ch.,
20 MHz Bandwidth, QPSK, 50 RB, 25 RB Offset**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.13 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.279 W/kg

SAR(1 g) = 0.150 W/kg

Smallest distance from peaks to all points 3 dB below is 15.3 mm

Ratio of SAR at M2 to SAR at M1 = 81.0 %

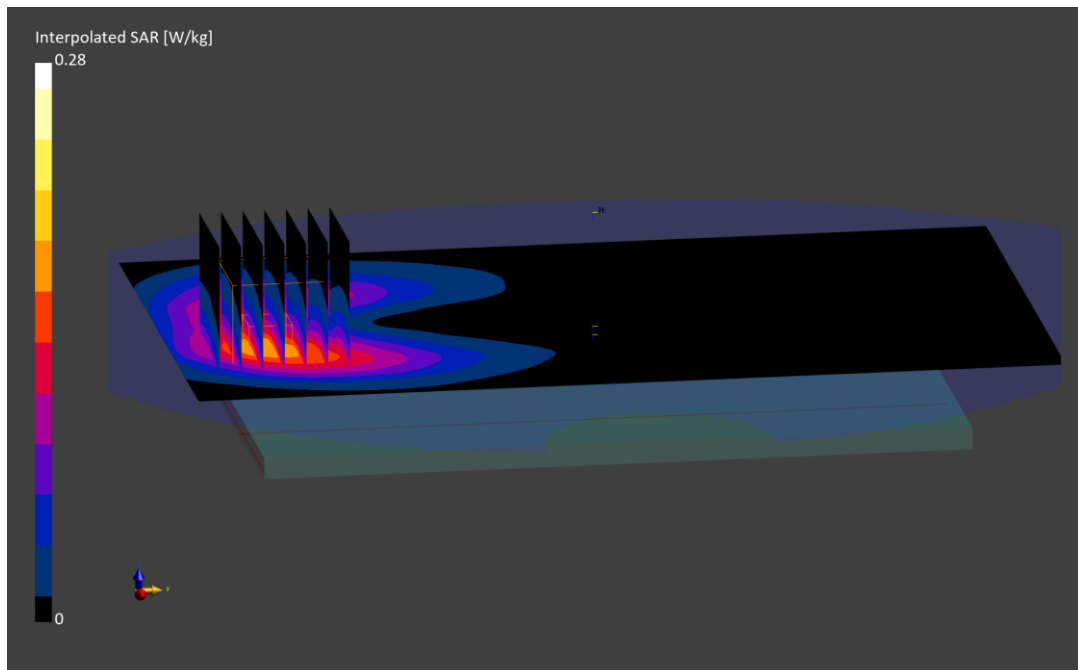

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0990M

Communication System: UID:10931 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 836.5 MHz

Medium: 835 Body; Medium parameters used:

f = 836.5 MHz; cond = 0.943 S/m; perm = 55.1; density = 1000 kg/m³

Phantom Section: Flat; Space: 15.00 mm

Test Date: 12/22/2022; Ambient Temp: 24.2°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7488; ConvF:(10.88,10.88,10.88); Calibrated: 2022-02-21

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1415; Calibrated: 2022-02-23

Phantom: Twin-SAM V8.0; Serial: 2065

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: NR Band n5, Body SAR, Back Side, Ch. 167300, 20 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 104 RB Offset

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.28 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.434 W/kg

SAR(1 g) = 0.258 W/kg

Smallest distance from peaks to all points 3 dB below is 11.9 mm

Ratio of SAR at M2 to SAR at M1 = 84.5 %

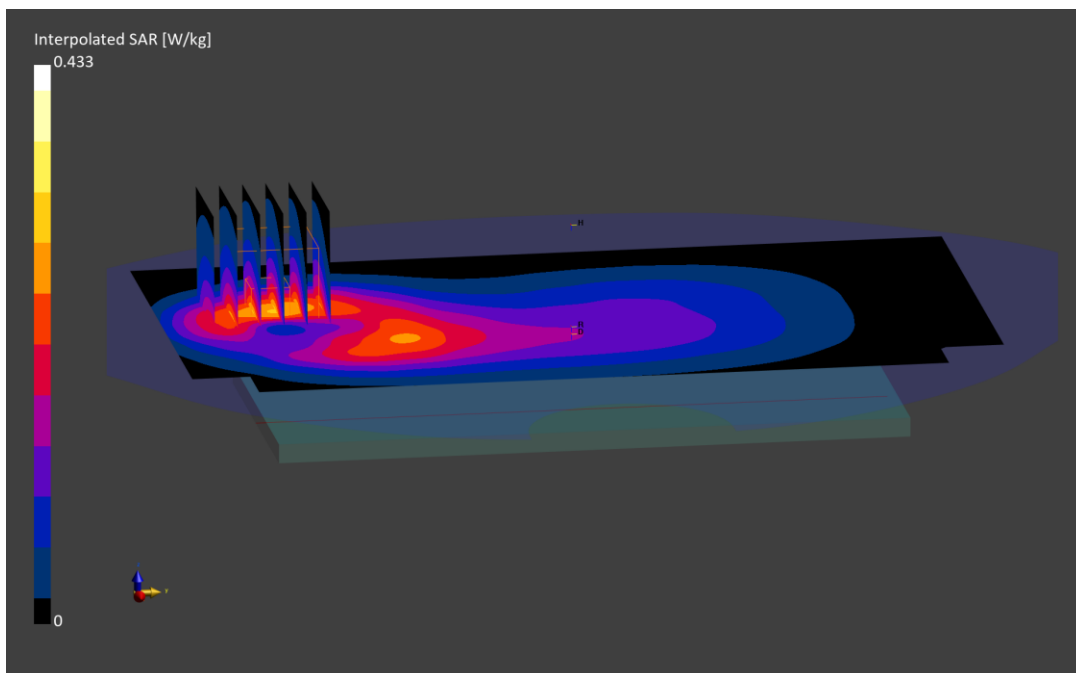

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0993M

Communication System: UID:10803 - AAD, 5G NR FR1 TDD; MAIA: Y; Frequency: 2593.0 MHz

Medium: 2450 Body; Medium parameters used:

f = 2593.0 MHz; cond = 2.14 S/m; perm = 50.8; density = 1000 kg/m³

Phantom Section: Flat; Space: 15.00 mm

Test Date: 12/13/2022; Ambient Temp: 20.9°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7410; ConvF:(7.45,7.45,7.45); Calibrated: 2022-07-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1583; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 1966

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n41, Antenna F, Body SAR, Back Side, Ch. 518598, 100 MHz Bandwidth,
CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.09 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.105 W/kg

Smallest distance from peaks to all points 3 dB below is 15.7 mm

Ratio of SAR at M2 to SAR at M1 = 82.2 %

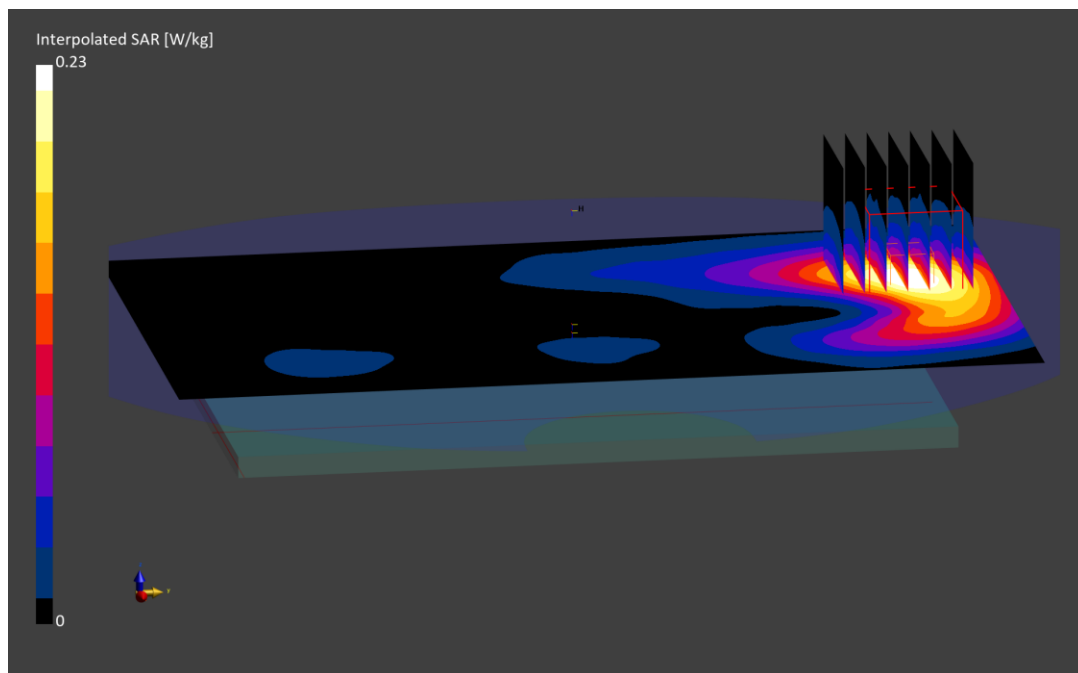

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0970M

Communication System: UID:10415 - AAA, WLAN; MAIA: Y; Frequency: 2437.0 MHz

Medium: 2450 Body; Medium parameters used:

f = 2437.0 MHz; cond = 2.01 S/m; perm = 51.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 15.00 mm

Test Date: 12/27/2022; Ambient Temp: 23.0°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7410; ConvF:(7.52,7.52,7.52); Calibrated: 2022-07-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1583; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 1966

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: IEEE 802.11b, 22 MHz Bandwidth, MIMO, Body SAR, Back Side, Ch. 6, 1 Mbps

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.15 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.157 W/kg

Smallest distance from peaks to all points 3 dB below is 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 82.9 %

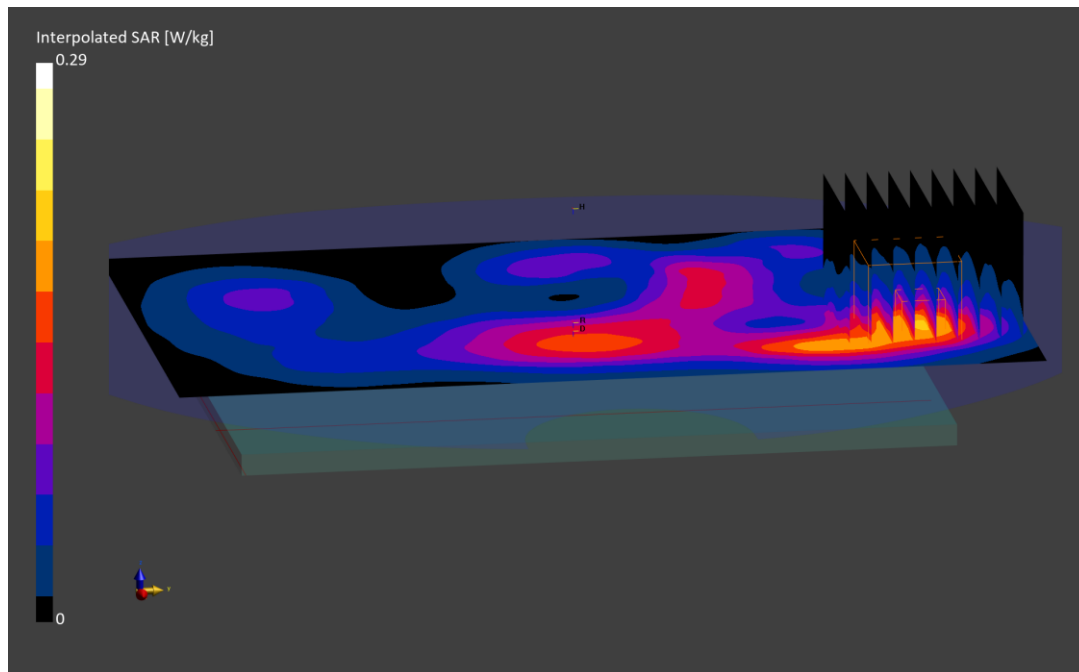

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0970M

Communication System: UID:10591 - AAC, WLAN; MAIA: Y; Frequency: 5500.0 MHz

Medium: 5200-5800 Body; Medium parameters used:

f = 5500.0 MHz; cond = 5.71 S/m; perm = 47.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 15.00 mm

Test Date: 12/21/2022; Ambient Temp: 22.7°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7659; ConvF:(4.6,4.6,4.6); Calibrated: 2022-04-20

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1407; Calibrated: 2022-04-13

Phantom: Twin-SAM V5.0; Serial: 1873

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: IEEE 802.11n, 20 MHz Bandwidth, UNII-2C, MIMO, Ch. 100,
Body SAR, Back Side, 13 Mbps**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.01 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.466 W/kg

SAR(1 g) = 0.150 W/kg

Smallest distance from peaks to all points 3 dB below is 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 66.0 %

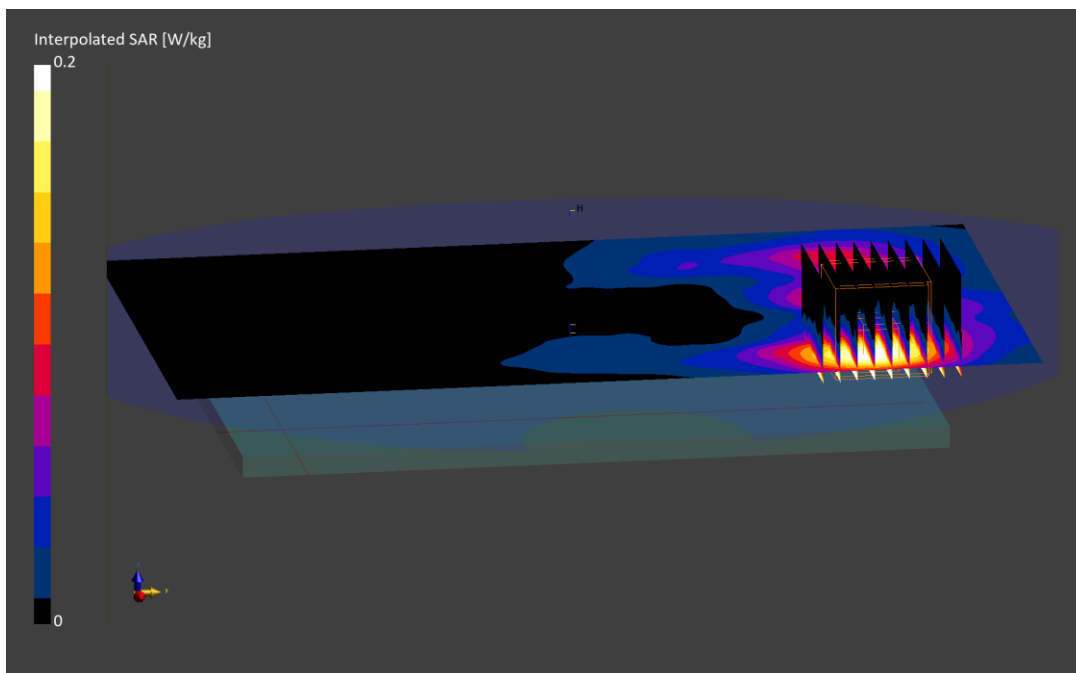

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0970M

Communication System: UID:10032 - CAA, Bluetooth; MAIA: Y; Frequency: 2441.0 MHz

Medium: 2450 Body; Medium parameters used:

f = 2441.0 MHz; cond = 2.00 S/m; perm = 51.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 15.00 mm

Test Date: 12/29/2022; Ambient Temp: 24.0°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7410; ConvF:(7.52,7.52,7.52); Calibrated: 2022-07-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1583; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 1966

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: Bluetooth, Antenna 1, Body SAR, Ch. 39, 1 Mbps, Back Side

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.03 W/kg; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.064 W/kg

SAR(1 g) = 0.035 W/kg

Smallest distance from peaks to all points 3 dB below is 16.2 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

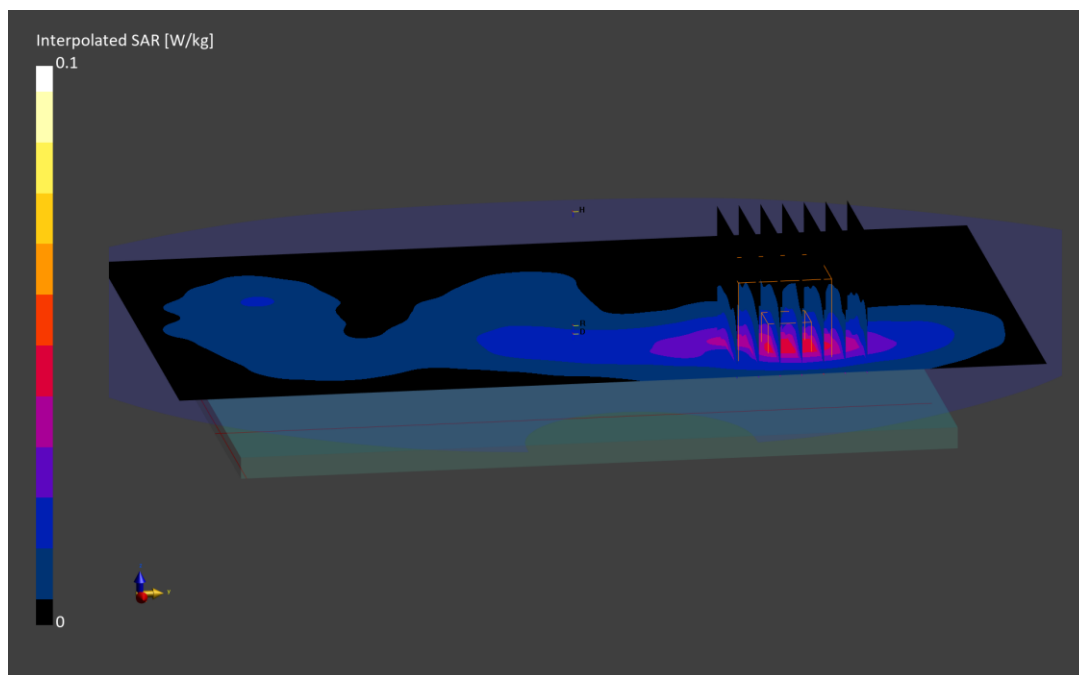

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0959M

Communication System: UID:10027 - DAC, GSM; MAIA: Y; Frequency: 848.8 MHz

Medium: 835 Body; Medium parameters used:

f = 848.8 MHz; cond = 1.01 S/m; perm = 53.1; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 12/15/2022; Ambient Temp: 22.5°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7640; ConvF:(10.66,10.66,10.66); Calibrated: 2022-02-24

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1645; Calibrated: 2022-02-21

Phantom: Twin-SAM V5.0; Serial: 1868

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: GPRS 850, Body SAR, Back Side, High Ch., 3 Tx Slots

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.71 W/kg; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.750 W/kg

Smallest distance from peaks to all points 3 dB below is 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

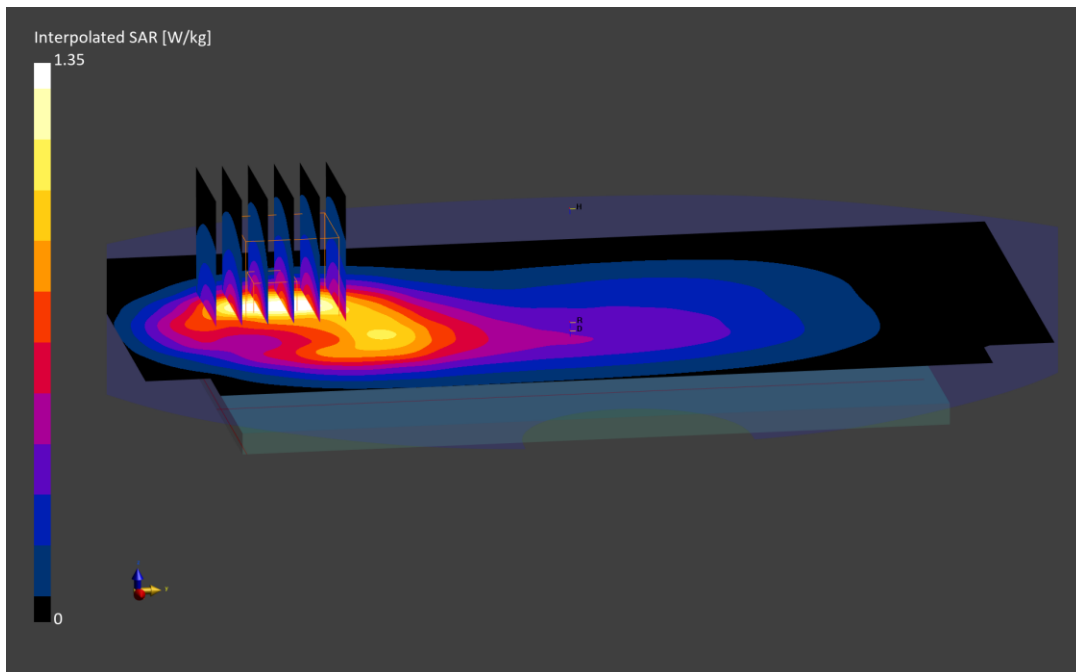

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0968M

Communication System: UID:10028 - DAC, GSM; MAIA: Y; Frequency: 1880.0 MHz

Medium: 1900 Body; Medium parameters used:

f = 1880.0 MHz; cond = 1.52 S/m; perm = 51.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 12/15/2022; Ambient Temp: 23.9°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7570; ConvF:(8.19,8.19,8.19); Calibrated: 2022-01-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1558; Calibrated: 2022-01-14

Phantom: Twin-SAM V8.0; Serial: 20063

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: GPRS 1900, Body SAR, Bottom Edge, Mid Ch., 4 Tx Slots

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.73 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.703 W/kg

Smallest distance from peaks to all points 3 dB below is 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 81.4 %

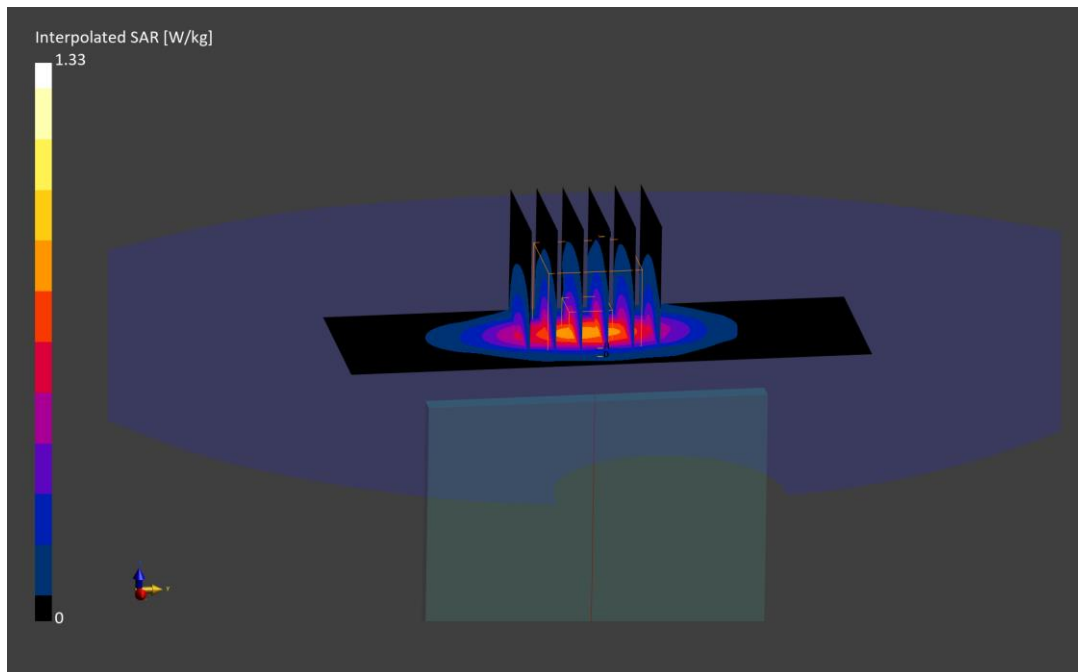

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0958M

Communication System: UID:10011 - CAB, WCDMA; MAIA: Y; Frequency: 846.6 MHz

Medium: 835 Body; Medium parameters used:

f = 846.6 MHz; cond = 0.969 S/m; perm = 54.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 12/15/2022; Ambient Temp: 21.4°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7547; ConvF:(9.63,9.63,9.63); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: UMTS 850, Body SAR, Back Side, High Ch.

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.75 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.733 W/kg

Smallest distance from peaks to all points 3 dB below is 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 82.5 %

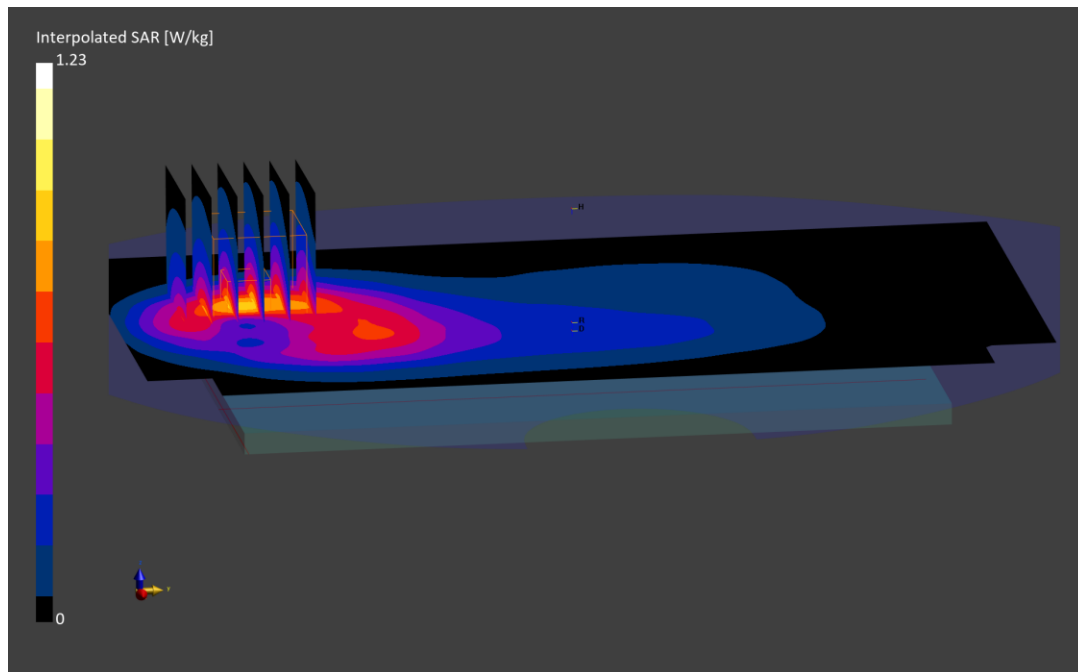

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0959M

Communication System: UID:10175 - CAG, LTE-FDD; MAIA: Y; Frequency: 707.5 MHz

Medium: 750 Body; Medium parameters used:

f = 707.5 MHz; cond = 0.921 S/m; perm = 55.3; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 01/02/2023; Ambient Temp: 20.9°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7547; ConvF:(9.87,9.87,9.87); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 12, Body SAR, Back Side, Mid Ch,
10 MHz Bandwidth, QPSK, 1 RB, 49 RB Offset**

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.30 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.532 W/kg

SAR(1 g) = 0.292 W/kg

Smallest distance from peaks to all points 3 dB below is 14.1 mm

Ratio of SAR at M2 to SAR at M1 = 83.6 %

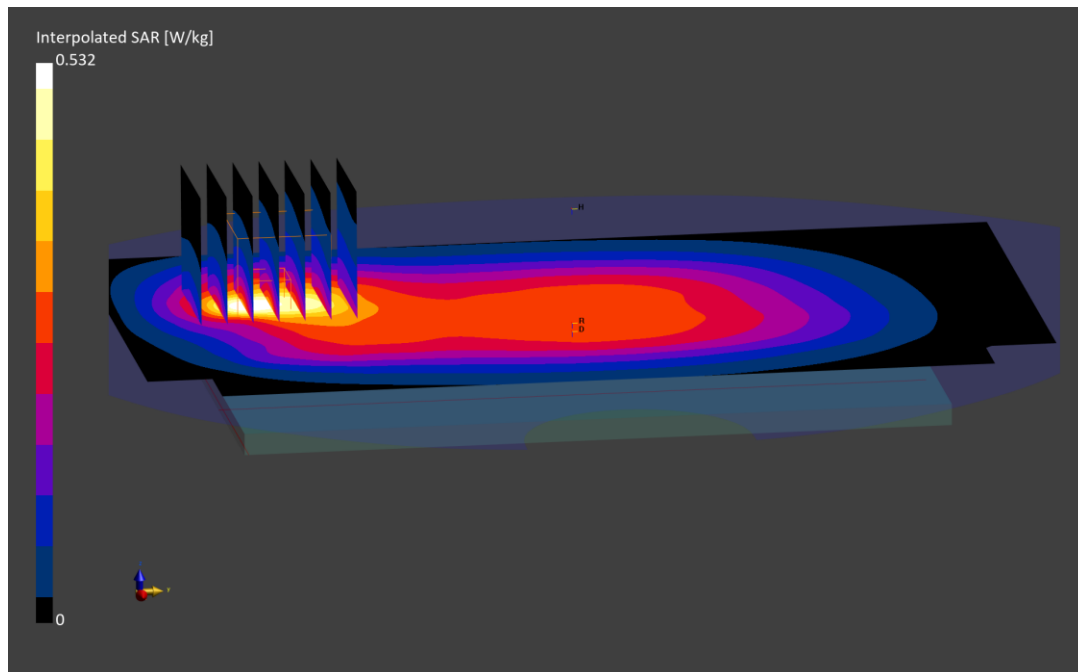

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0959M

Communication System: UID:10175 - CAG, LTE-FDD; MAIA: Y; Frequency: 782.0 MHz

Medium: 750 Body; Medium parameters used:

f = 782.0 MHz; cond = 0.950 S/m; perm = 55.1; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 01/02/2023; Ambient Temp: 20.9°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7547; ConvF:(9.87,9.87,9.87); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 13, Body SAR, Back side, Mid Ch,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.50 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.830 W/kg

SAR(1 g) = 0.494 W/kg

Smallest distance from peaks to all points 3 dB below is 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 86.4 %

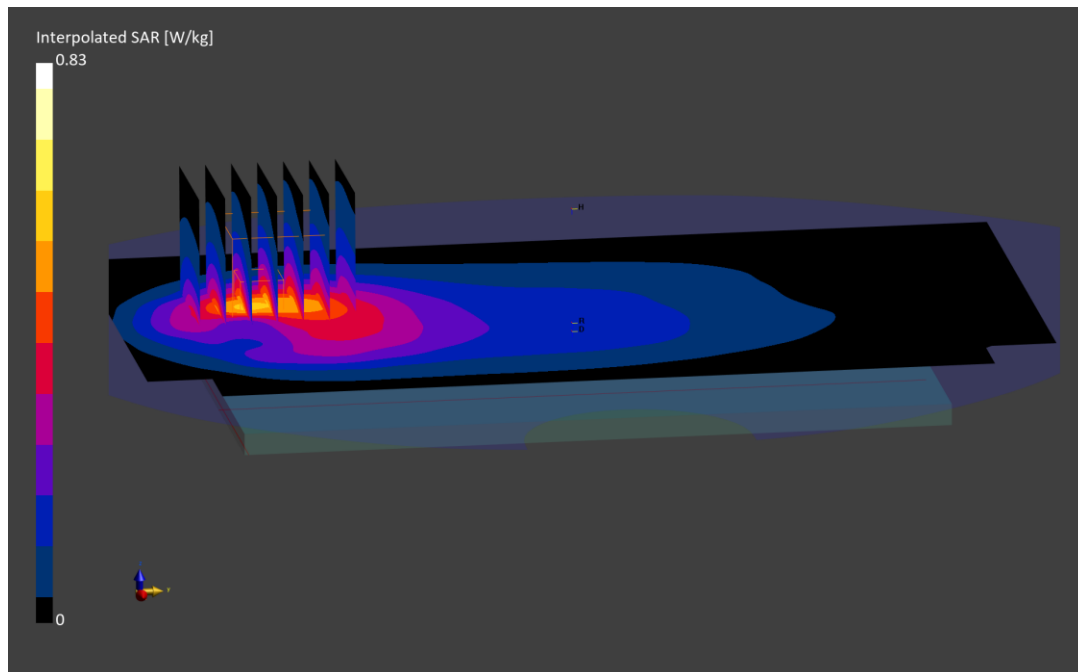

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0958M

Communication System: UID:10181 - CAE, LTE-FDD; MAIA: Y; Frequency: 831.5 MHz

Medium: 835 Body; Medium parameters used:

f = 831.5 MHz; cond = 0.955 S/m; perm = 54.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 12/20/2022; Ambient Temp: 20.5°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7547; ConvF:(9.63,9.63,9.63); Calibrated: 2022-10-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2022-10-17

Phantom: Twin-SAM V8.0; Serial: 1934

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 26, Body SAR, Back Side, Mid Ch,
15 MHz Bandwidth, QPSK, 1 RB, 36 RB Offset**

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.73 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.722 W/kg

Smallest distance from peaks to all points 3 dB below is 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 87.1 %

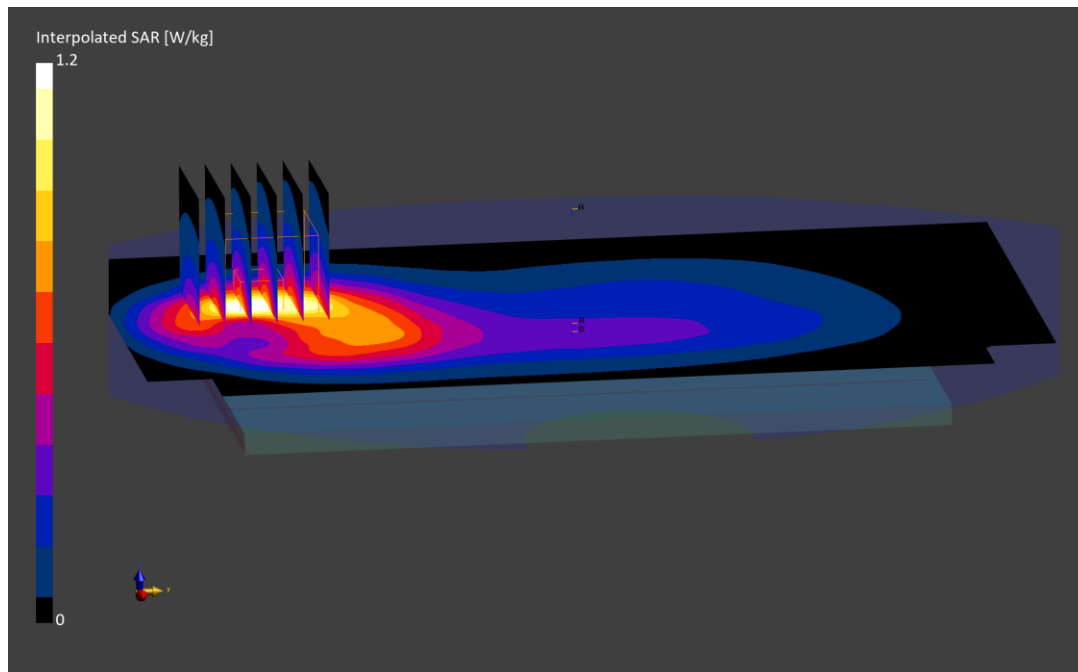

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0968M

Communication System: UID:10297 - AAD, LTE-FDD; MAIA: Y; Frequency: 1770.0 MHz

Medium: 1750 Body; Medium parameters used:

f = 1770.0 MHz; cond = 1.51 S/m; perm = 51.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 12/19/2022; Ambient Temp: 21.5°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7406; ConvF:(8.06,8.06,8.06); Calibrated: 2022-07-18

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1677; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 2064

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 66 (AWS), Body SAR, Bottom Edge, High Ch.,
20 MHz Bandwidth, QPSK, 50 RB, 25 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.71 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.703 W/kg

Smallest distance from peaks to all points 3 dB below is 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 81.0 %

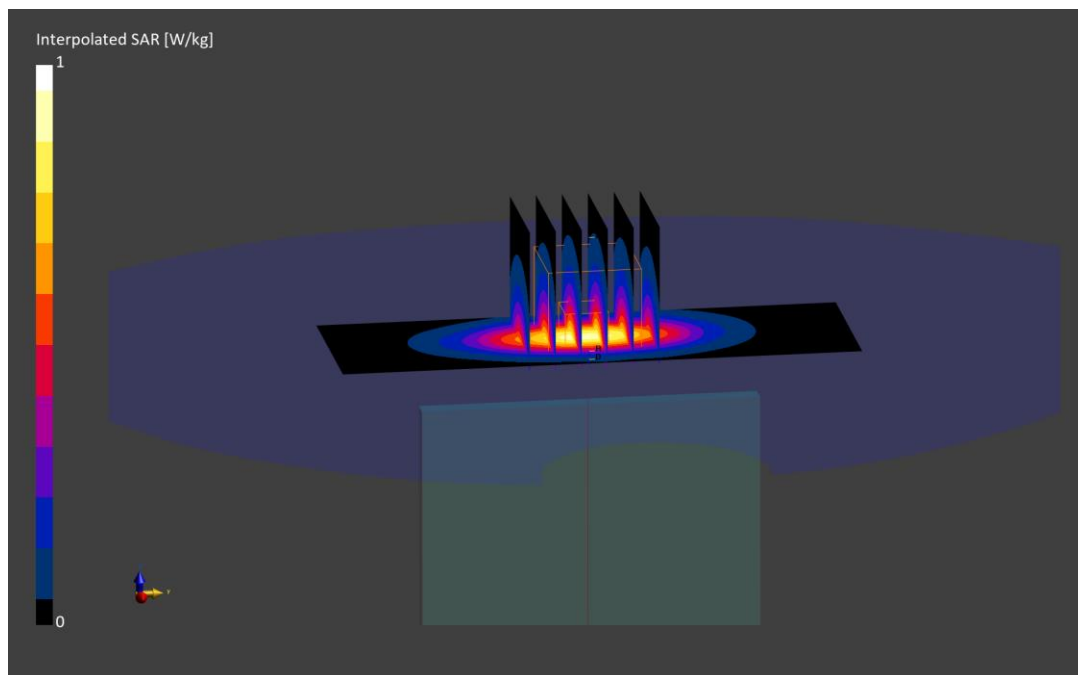

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0968M

Communication System: UID:10297 - AAE, LTE-FDD; MAIA: Y; Frequency: 1880.0 MHz

Medium: 1900 Body; Medium parameters used:

f = 1880.0 MHz; cond = 1.52 S/m; perm = 52.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 12/13/2022; Ambient Temp: 22.5°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7570; ConvF:(8.19,8.19,8.19); Calibrated: 2022-01-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1558; Calibrated: 2022-01-14

Phantom: Twin-SAM V8.0; Serial: 20063

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 2, Body SAR, Bottom Edge, Mid Ch, 20 MHz Bandwidth
QPSK, 50 RB, 0 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.77 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.767 W/kg

Smallest distance from peaks to all points 3 dB below is 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 81.3 %

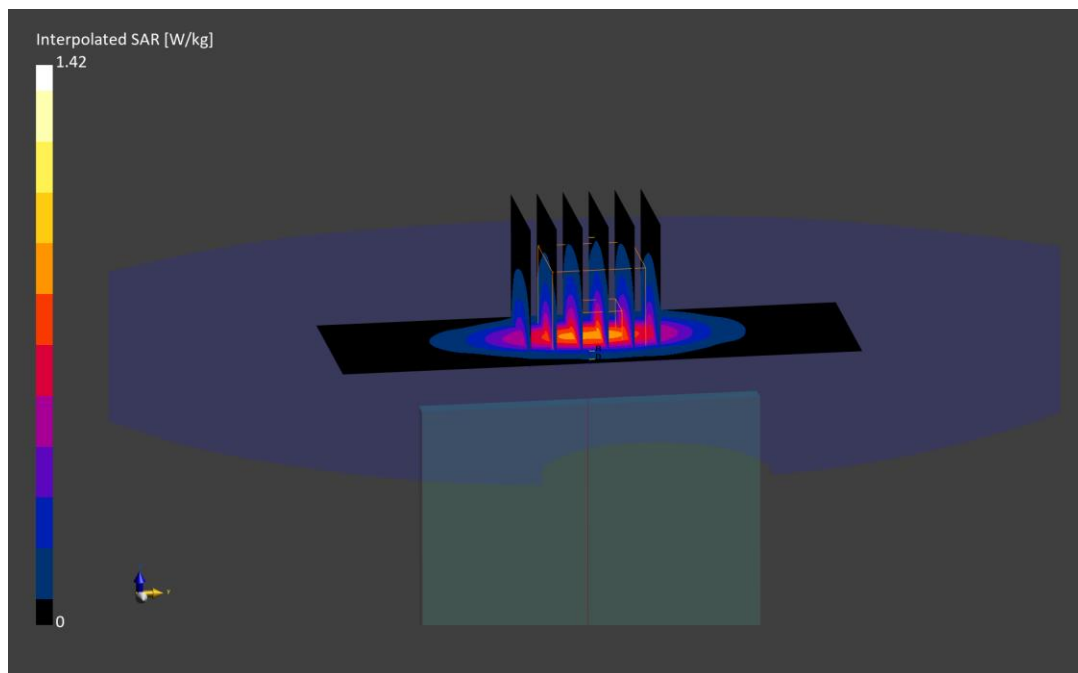

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0982M

Communication System: UID:10494 - AAF, LTE-TDD; MAIA: Y; Frequency: 2549.5 MHz

Medium: 2450 Body; Medium parameters used:

f = 2549.5 MHz; cond = 2.12 S/m; perm = 51.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 01/03/2023; Ambient Temp: 21.3°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7410; ConvF:(7.45,7.45,7.45); Calibrated: 2022-07-19

Sensor-Surface: 1.4mm (All points)

Electronics: DAE4 Sn1583; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 1966

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 41, ULCA, Body SAR, Bottom Edge,
PCC: 20 MHz Bandwidth, Ch.40185 QPSK, 50 RB, 50 RB Offset
SCC: 20 MHz Bandwidth, Ch.40383 QPSK, 50 RB, 0 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.43 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.618 W/kg

Smallest distance from peaks to all points 3 dB below is 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.1 %

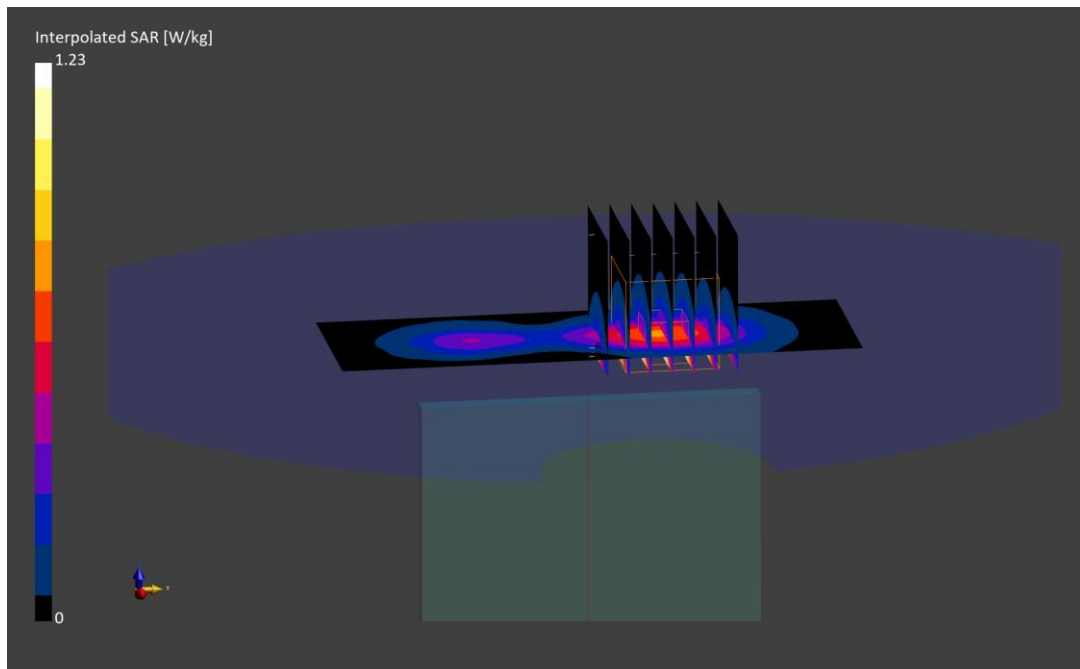

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0990M

Communication System: UID:10931 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 836.5 MHz

Medium: 835 Body; Medium parameters used:

f = 836.5 MHz; cond = 0.943 S/m; perm = 55.1; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 12/22/2022; Ambient Temp: 24.2°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7488; ConvF:(10.88,10.88,10.88); Calibrated: 2022-02-21

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1415; Calibrated: 2022-02-23

Phantom: Twin-SAM V8.0; Serial: 2065

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: NR Band n5, Body SAR, Back Side, Ch. 167300, 20 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 104 RB Offset

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.74 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.658 W/kg

Smallest distance from peaks to all points 3 dB below is 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 81.1 %

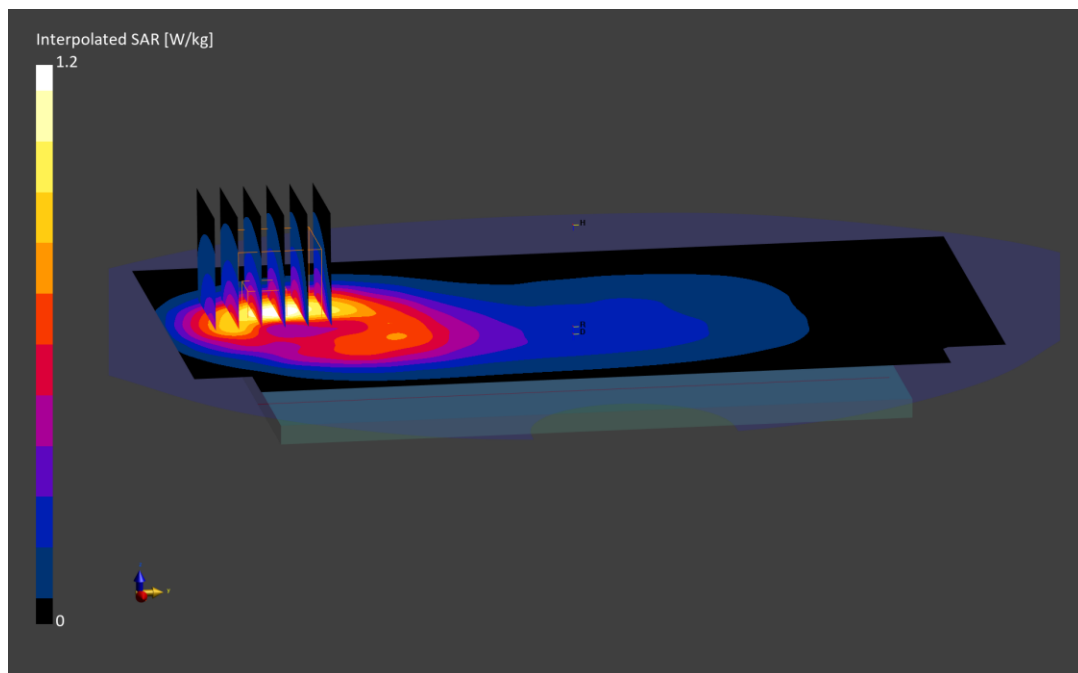

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0993M

Communication System: UID:10803 - AAD, 5G NR FR1 TDD; MAIA: Y; Frequency: 2593.0 MHz

Medium: 2450 Body; Medium parameters used:

f = 2593.0 MHz; cond = 2.14 S/m; perm = 50.8; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 12/13/2022; Ambient Temp: 20.9°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7410; ConvF:(7.45,7.45,7.45); Calibrated: 2022-07-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1583; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 1966

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n41, Ant F, Body SAR, Top Edge, Ch. 518598, 100 MHz Bandwidth,
CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.38 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.423 W/kg

Smallest distance from peaks to all points 3 dB below is 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 79.8 %

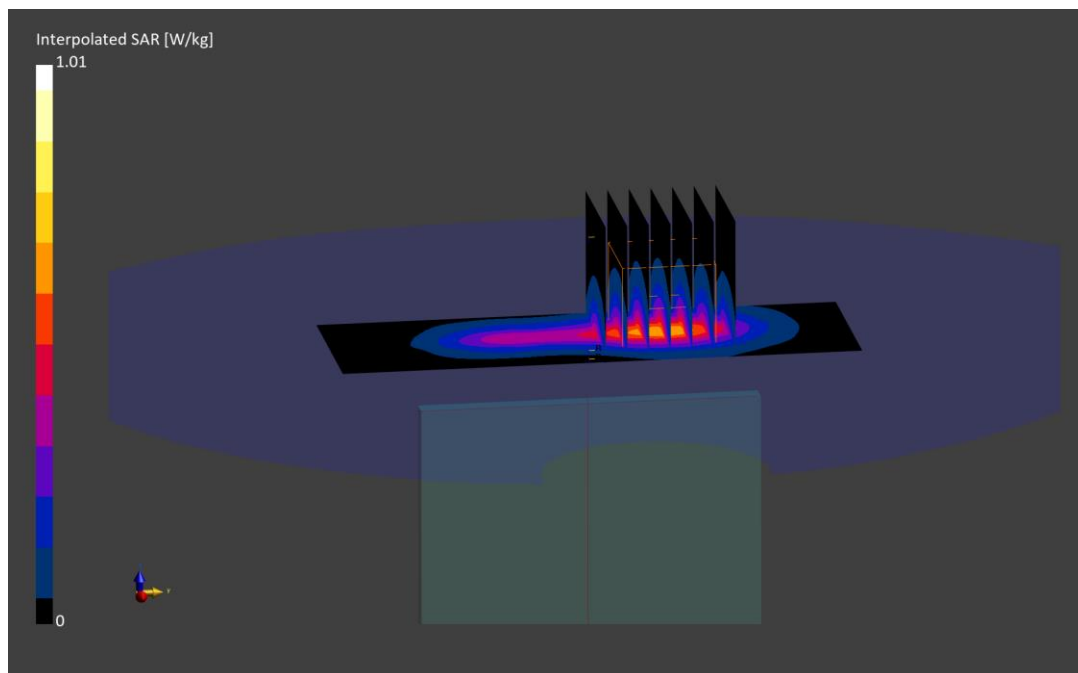

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0970M

Communication System: UID:10415 - AAA, WLAN; MAIA: Y; Frequency: 2437.0 MHz

Medium: 2450 Body; Medium parameters used:

f = 2437.0 MHz; cond = 2.01 S/m; perm = 51.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 12/27/2022; Ambient Temp: 23.0°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7410; ConvF:(7.52,7.52,7.52); Calibrated: 2022-07-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1583; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 1966

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: IEEE 802.11b, 22 MHz Bandwidth, MIMO, Body SAR, Left Edge, Ch. 6, 1 Mbps

Area Scan (40.0 x 200.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.64 W/kg; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.668 W/kg

Smallest distance from peaks to all points 3 dB below is 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.3 %

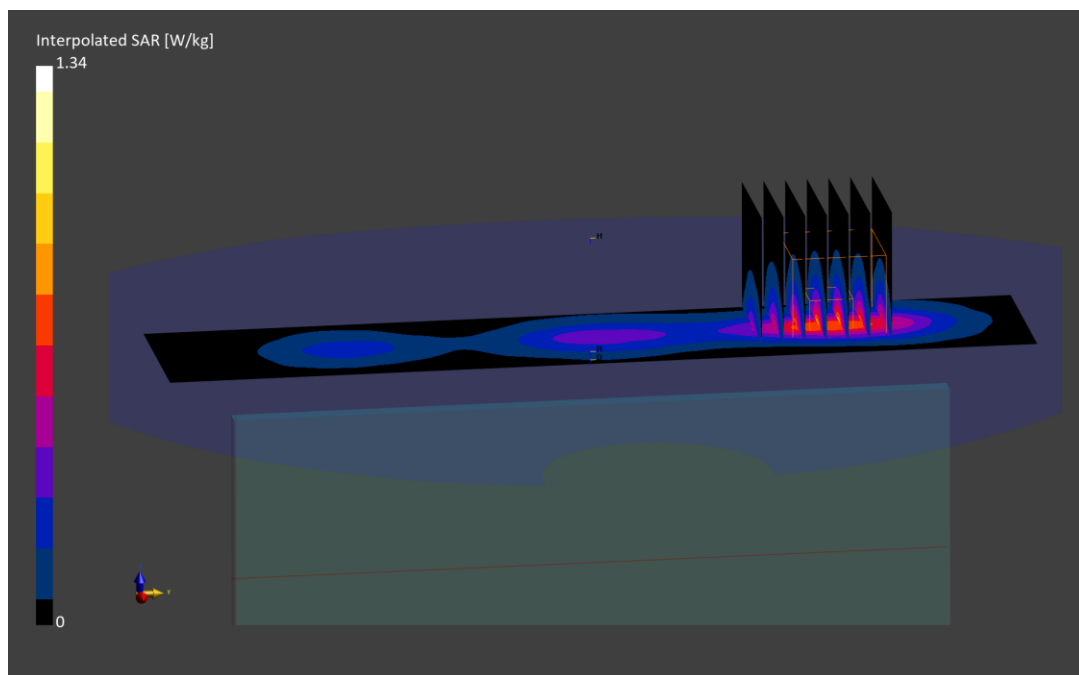

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0970M

Communication System: UID:10591 - AAC, WLAN; MAIA: Y; Frequency: 5785.0 MHz

Medium: 5200-5800 Body; Medium parameters used:

f = 5785.0 MHz; cond = 6.14 S/m; perm = 47.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 12/21/2022; Ambient Temp: 22.7°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7659; ConvF:(4.67,4.67,4.67); Calibrated: 2022-04-20

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1407; Calibrated: 2022-04-13

Phantom: Twin-SAM V5.0; Serial: 1873

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: IEEE 802.11n, 20 MHz Bandwidth, UNII-3, MIMO, Ch. 157,
Body SAR, Back Side, 13 Mbps**

Area Scan (120.0 x 200.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.01 W/kg; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.923 W/kg

SAR(1 g) = 0.239 W/kg

Smallest distance from peaks to all points 3 dB below is 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 61.3 %

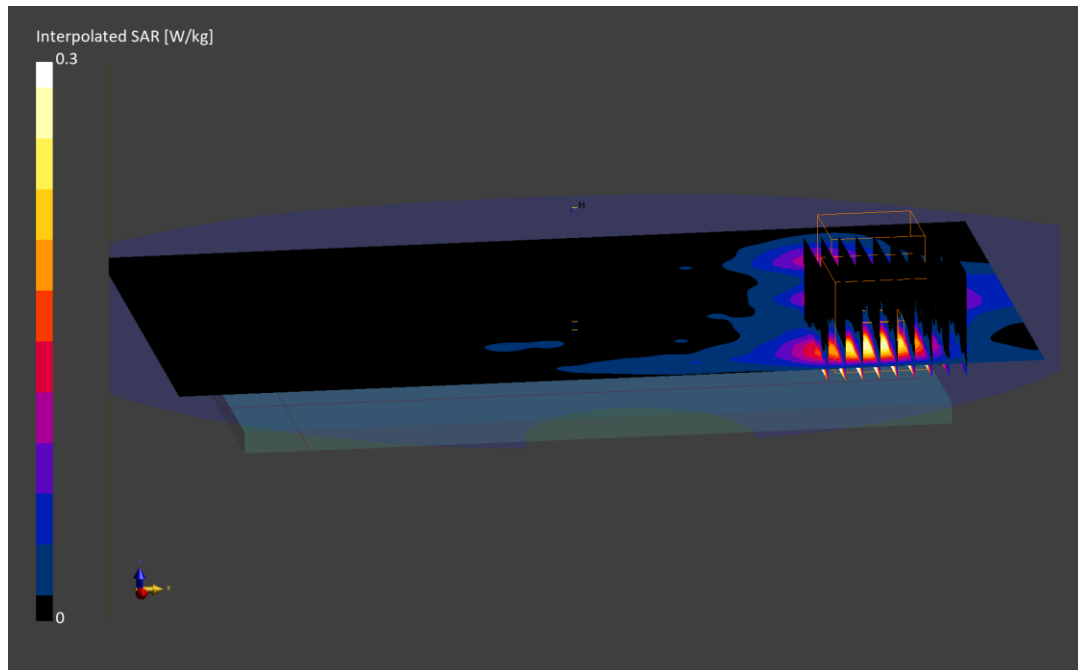

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0970M

Communication System: UID:10032 - CAA, Bluetooth; MAIA: Y; Frequency: 2441.0 MHz

Medium: 2450 Body; Medium parameters used:

f = 2441.0 MHz; cond = 2.00 S/m; perm = 51.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 10.00 mm

Test Date: 12/29/2022; Ambient Temp: 24.0°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7410; ConvF:(7.52,7.52,7.52); Calibrated: 2022-07-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1583; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 1966

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: Bluetooth, Antenna 1, Body SAR, Ch. 39, 1 Mbps, Left Edge

Area Scan (40.0 x 200.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.18 W/kg; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.188 W/kg

Smallest distance from peaks to all points 3 dB below is 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.0 %

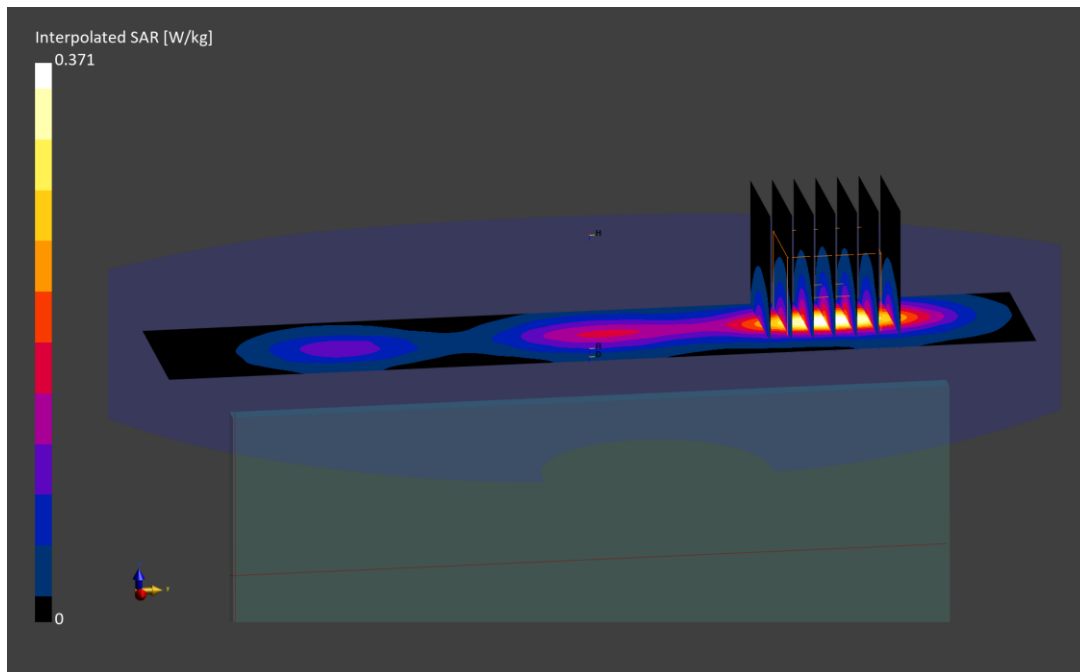

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0968M

Communication System: UID:10028 - DAC, GSM; MAIA: Y; Frequency: 1880.0 MHz

Medium: 1900 Body; Medium parameters used:

f = 1880.0 MHz; cond = 1.52 S/m; perm = 51.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 12/15/2022; Ambient Temp: 23.9°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7570; ConvF:(8.19,8.19,8.19); Calibrated: 2022-01-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1558; Calibrated: 2022-01-14

Phantom: Twin-SAM V8.0; Serial: 20063

Measurement SW: DASY Module SAR V16.2.0.1425

Mode: GPRS 1900, Phablet SAR, Bottom Edge, Mid Ch., 4 Tx Slots

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 2.59 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 8.22 W/kg

SAR(10 g) = 1.07 W/kg

Smallest distance from peaks to all points 3 dB below is 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 66.9 %

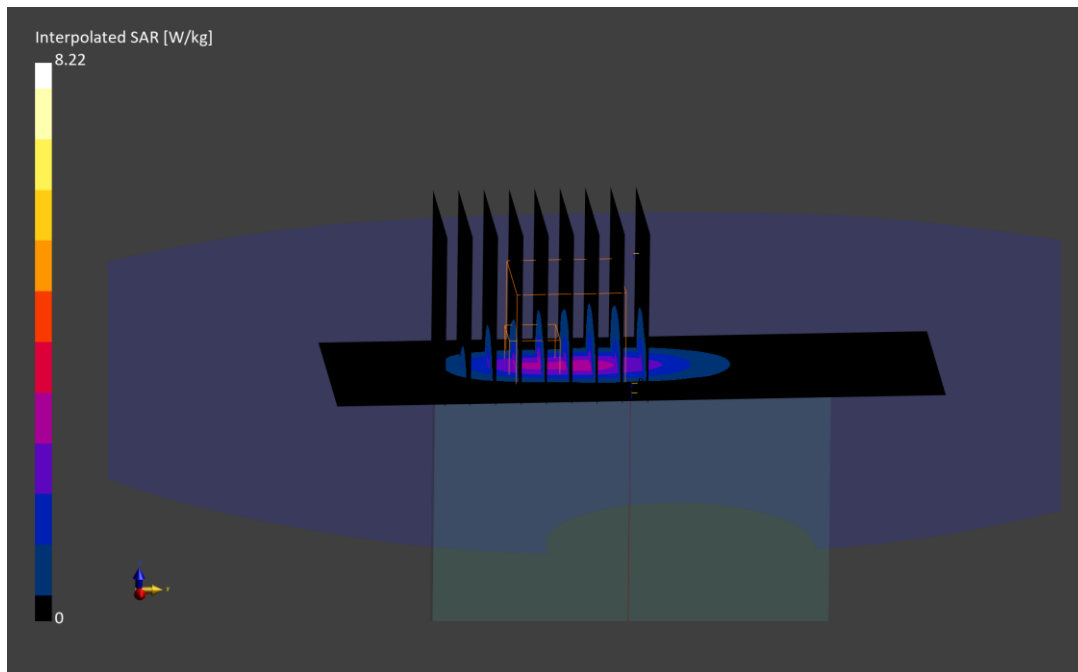

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0968M

Communication System: UID:10297 - AAD, LTE-FDD; MAIA: Y; Frequency: 1720.0 MHz

Medium: 1750 Body; Medium parameters used:

f = 1720.0 MHz; cond = 1.46 S/m; perm = 51.4; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 12/19/2022; Ambient Temp: 21.5°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7406; ConvF:(8.06,8.06,8.06); Calibrated: 2022-07-18

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1677; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 2064

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 66 (AWS), Phablet SAR, Bottom Edge, Low Ch,
20 MHz Bandwidth, QPSK, 50 RB, 25 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.9 mm, dy=5.9 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 3.41 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 7.66 W/kg

SAR(10 g) = 1.59 W/kg

Smallest distance from peaks to all points 3 dB below is 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 77.4 %

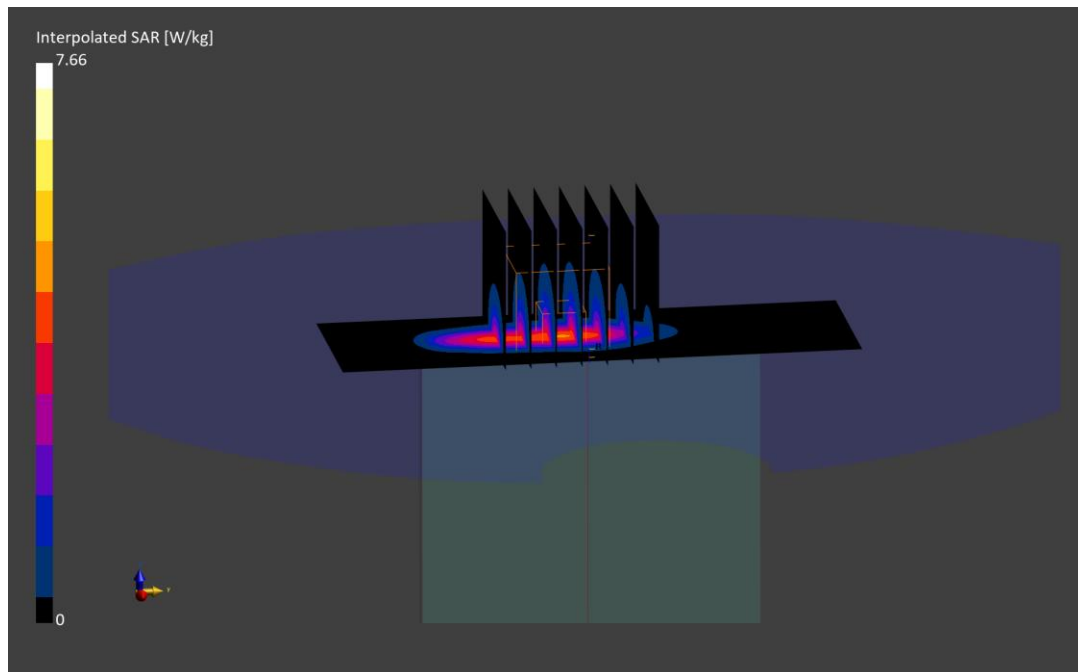

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0968M

Communication System: UID:10297 - AAE, LTE-FDD; MAIA: Y; Frequency: 1880.0 MHz

Medium: 1900 Body; Medium parameters used:

f = 1880.0 MHz; cond = 1.52 S/m; perm = 51.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 12/15/2022; Ambient Temp: 23.9°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7570; ConvF:(8.19,8.19,8.19); Calibrated: 2022-01-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1558; Calibrated: 2022-01-14

Phantom: Twin-SAM V8.0; Serial: 20063

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 2, Phablet SAR, Bottom edge, Mid Ch,
20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=4.2 mm, dy=4.2 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 3.50 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 10.7 W/kg

SAR(10 g) = 1.34 W/kg

Smallest distance from peaks to all points 3 dB below is 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 70.5 %

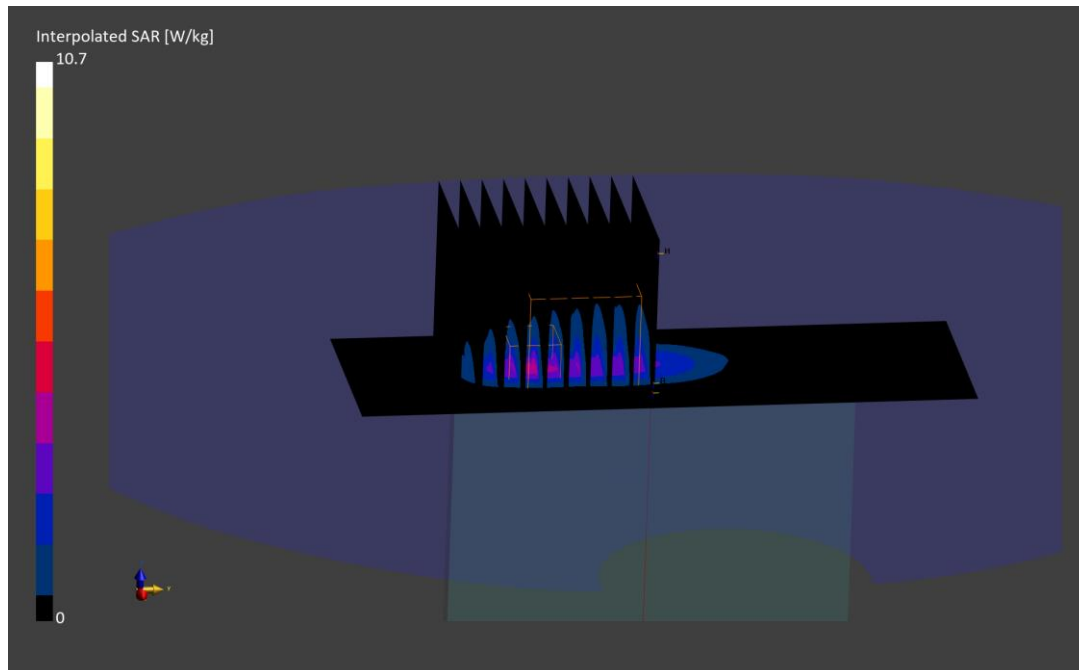

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0982M

Communication System: UID:10494 - AAF, LTE-TDD; MAIA: Y; Frequency: 2506.0 MHz

Medium: 2450 Body; Medium parameters used:

f = 2506.0 MHz; cond = 2.07 S/m; perm = 50.9; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 12/27/2022; Ambient Temp: 23.0°C; Tissue Temp: 22.4°C

Probe: EX3DV4 - SN7410; ConvF:(7.52,7.52,7.52); Calibrated: 2022-07-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1583; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 1966

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: LTE Band 41, Ant B, Phablet SAR, Bottom Edge, Low Ch.,
20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 4.38 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 15.9 W/kg

SAR(10 g) = 1.54 W/kg

Smallest distance from peaks to all points 3 dB below is 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 73.7 %

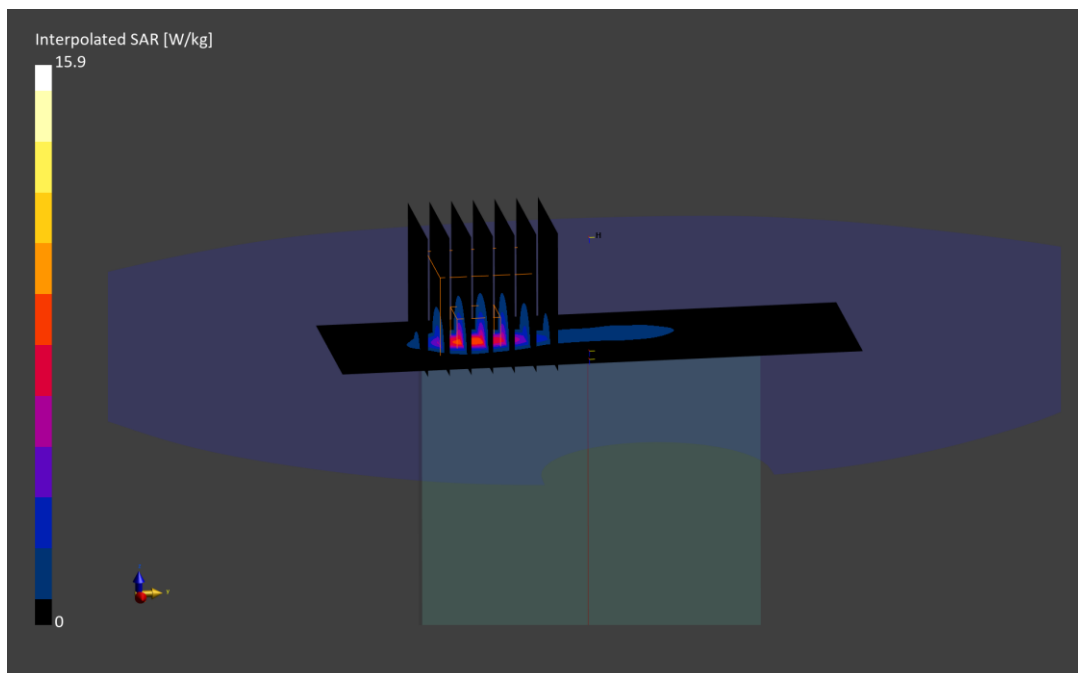

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0993M

Communication System: UID:10803 - AAD, 5G NR FR1 TDD; MAIA: Y; Frequency: 2593.0 MHz

Medium: 2450 Body; Medium parameters used:

$f = 2593.0$ MHz; $\text{cond} = 2.14$ S/m; $\text{perm} = 50.8$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 12/13/2022; Ambient Temp: 20.9°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7410; ConvF:(7.45,7.45,7.45); Calibrated: 2022-07-19

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1583; Calibrated: 2022-07-18

Phantom: Twin-SAM V8.0; Serial: 1966

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: NR Band n41, Ant F, Phablet SAR, Top Edge, Ch. 518598, 100 MHz Bandwidth,
CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (40.0 x 120.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=3.8$ mm, $dy=3.8$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 4.40 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(10 g) = 1.68 W/kg

Smallest distance from peaks to all points 3 dB below is 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 69.9 %

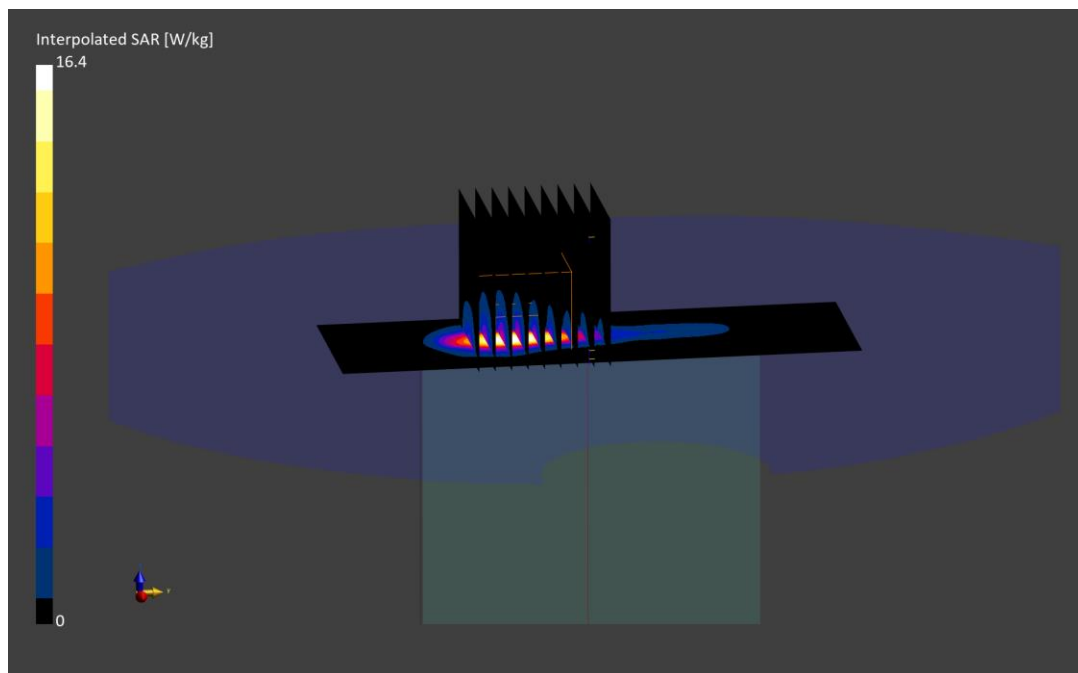

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0970M

Communication System: UID:10591 - AAC, WLAN; MAIA: Y; Frequency: 5500.0 MHz

Medium: 5200-5800 Body; Medium parameters used:

f = 5500.0 MHz; cond = 5.71 S/m; perm = 47.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 12/21/2022; Ambient Temp: 22.7°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7659; ConvF:(4.6,4.6,4.6); Calibrated: 2022-04-20

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1407; Calibrated: 2022-04-13

Phantom: Twin-SAM V5.0; Serial: 1873

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: IEEE 802.11n, 20 MHz Bandwidth, UNII-2C, MIMO, Ch. 100,
Phablet SAR, Left Edge, 13 Mbps**

Area Scan (40.0 x 200.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=2.6 mm, dy=2.6 mm, dz=1.2 mm; Graded Ratio: 1.2


Reference Value = 0.02 W/kg; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 35.8 W/kg

SAR(10 g) = 1.22 W/kg

Smallest distance from peaks to all points 3 dB below is 3.3 mm

Ratio of SAR at M2 to SAR at M1 = 68.5 %

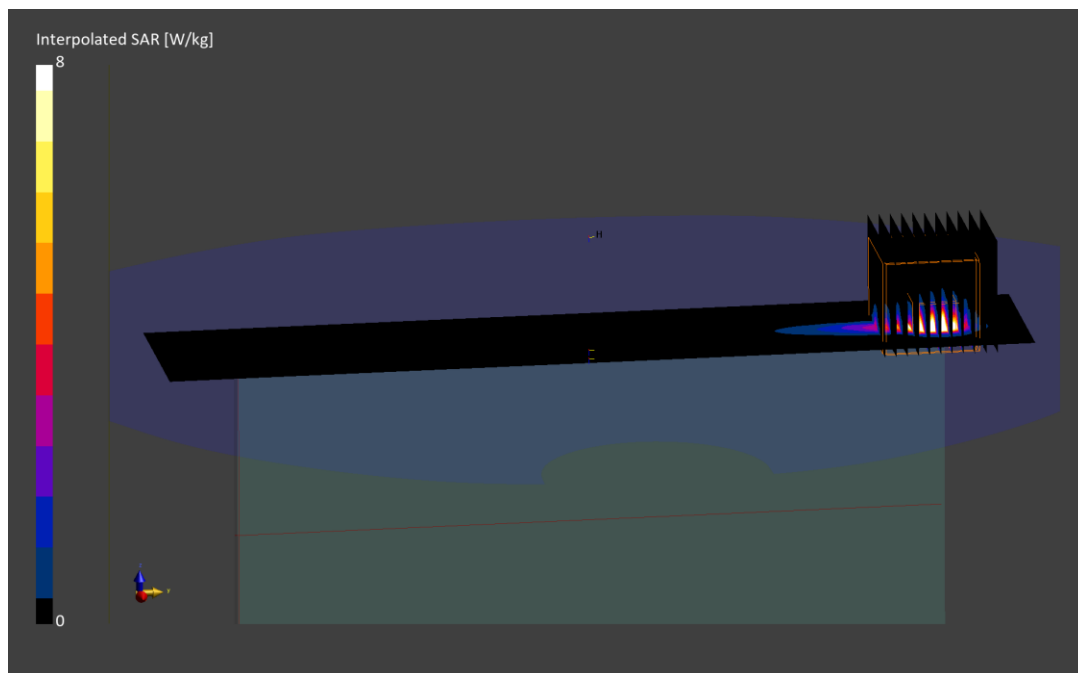

ELEMENT

DUT: A3LSMS918JPN; Type: Portable Handset; Serial: 0978M

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 13.6 MHz
Medium: 30 Head; Medium parameters used:
f = 13.6 MHz; cond = 0.719 S/m; perm = 52.9; density = 1000 kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 01/18/2023; Ambient Temp: 22.6°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7527; ConvF:(17.78,17.78,17.78); Calibrated: 2022-03-21
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1272; Calibrated: 2022-03-16
Phantom: ELI V8.0; Serial: 2077
Measurement SW: DASY Module SAR V16.2.0.1425

Mode: NFC, Phablet SAR, Back Side

Area Scan (120.0 x 210.0): Measurement grid: dx=15.0 mm, dy=15.0 mm

Zoom Scan (36.0 x 36.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Reference Value = 0.07 W/kg; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.277 W/kg

SAR(10 g) = 0.024 W/kg

Smallest distance from peaks to all points 3 dB below is 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.1 %

