



# CERTIFICATION TEST REPORT

**Report Number. :** 4790976580-E5V2

**Applicant :** SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 16677, KOREA

**Model :** SC-51E, SCG25

**FCC ID :** A3LSMS921JPN

**EUT Description :** GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax,  
NFC and WPT

**Test Standard(s) :** FCC 47 CFR PART 15 SUBPART C

**Date Of Issue:**  
2024-01-31

**Prepared by:**  
UL KOREA LTD.  
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL KOREA LTD. Suwon Laboratory  
218 Maeyeong-ro, Yeongtong-gu  
Suwon-si, Gyeonggi-do, 16675, Korea  
TEL: (031) 337-9902  
FAX: (031) 213-5433



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	2024-01-23	Initial issue	Jaejin Lee
V2	2024-01-31	Updated to address TCB's question	Jaejin Lee

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
1.1. <i>INTRODUCTION OF TEST DATA REUSE.....</i>	6
1.2. <i>DIFFERENCE.....</i>	6
1.3. <i>SPOT CHECK VERIFICATION DATA.....</i>	6
1.4. <i>REFERENCE DETAIL .....</i>	6
<b>2. TEST METHODOLOGY .....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	8
4.2. <i>SAMPLE CALCULATION .....</i>	8
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	8
4.4. <i>DECISION RULE.....</i>	8
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>9</b>
5.1. <i>EUT DESCRIPTION.....</i>	9
5.2. <i>MAXIMUM OUTPUT POWER .....</i>	10
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	10
5.4. <i>List of test reduction and modes covering other modes: .....</i>	10
5.5. <i>TESTED CHANNELS LIST.....</i>	11
5.6. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	11
5.7. <i>DESCRIPTION OF TEST SETUP.....</i>	12
<b>6. MEASUREMENT METHOD .....</b>	<b>14</b>
<b>7. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>15</b>
<b>8. SUMMARY TABLE .....</b>	<b>16</b>
<b>9. ANTENNA PORT TEST RESULTS .....</b>	<b>17</b>
9.1. <i>ON TIME AND DUTY CYCLE.....</i>	17
9.2. <i>6 dB BANDWIDTH.....</i>	18
9.2.1. <i>802.11b MIMO MODE IN THE 2.4 GHz BAND .....</i>	19
9.2.2. <i>802.11g MIMO MODE IN THE 2.4 GHz BAND .....</i>	19
9.2.3. <i>802.11n HT20 MIMO MODE IN THE 2.4 GHz BAND .....</i>	19
9.2.4. <i>802.11ax HE20(26T) MIMO MODE IN THE 2.4 GHz BAND .....</i>	19
9.3. <i>OUTPUT POWER .....</i>	20
9.3.1. <i>TEST RESULTS.....</i>	21

9.4. POWER SPECTRAL DENSITY.....	23
9.4.1. 802.11b/g/n HT20/ax HE20 MODE TEST RESULTS.....	24
9.5. CONDUCTED SPURIOUS EMISSIONS.....	25
9.5.1. 802.11b MODE .....	26
9.5.2. 802.11g MODE .....	30
9.5.3. 802.11n HT20 MODE .....	34
9.5.4. 802.11ax HE20(SU) MODE .....	38
9.5.5. 802.11ax HE20(RU) MODE .....	40
<b>10. RADIATED TEST RESULTS.....</b>	<b>42</b>
10.1. TRANSMITTER ABOVE 1 GHz.....	44
10.1.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND .....	44
10.1.2. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND .....	48
10.1.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND .....	52
10.1.4. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 2.4 GHz BAND.....	56
10.2. WORST CASE BELOW 1 GHZ.....	60
<b>11. AC POWER LINE CONDUCTED EMISSIONS.....</b>	<b>61</b>
11.1.1. AC Power Line.....	62
<b>12. SPOT-CHECK THEST RESULT .....</b>	<b>64</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.

**EUT DESCRIPTION:** GSM/WCDMA/LTE 5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC and WPT

**MODEL NUMBER:** SC-51E, SCG25

**SERIAL NUMBER:** R3CW90BXLKA, R3CW90BXLGJ (CONDUCTED, Original);  
R3CW90BXLCD, R3CW90BXLVF (RADIATED, Original);  
R3CWB0FGX5Z, R3CWB0FGXEX (RADIATED, Spot-check);

**DATE TESTED:** 2023-08-28 ~ 2023-10-27 (Original);  
2023-12-12 ~ 2024-01-23 (Spot-check);

### APPLICABLE STANDARDS

#### STANDARD

#### TEST RESULTS

47 CFR Part 15 Subpart C

Complies

UL KOREA LTD. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL KOREA LTD. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL KOREA LTD. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL KOREA LTD. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL KOREA LTD. By:

Seokhwan Hong  
Suwon Lab Engineer  
UL KOREA LTD.

Tested By:

Jaejin Lee  
Suwon Lab Engineer  
UL KOREA LTD.

## 1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMS921U DTS WLAN (FCC 47 CFR Part 15C). And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

## 1.2. DIFFERENCE

The A3LSMS921JPN model shares the same enclosure and circuit board except WWAN bands as A3LSMS921U. The WLAN antennas and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary radiated emissions that the performance of the A3LSMS921JPN remains representative of A3LSMS921U. The test data of A3LSMS921U being submitted for this application to cover WLAN features.

## 1.3. SPOT CHECK VERIFICATION DATA

(Worst case of the radiated band-edge and radiated spurious emissions)

Band	Test Item	Mode	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
					SM-S921U Results	SC-51E Results		
					FCC ID : A3LSMS921U	FCC ID : A3LSMS921JPN		
DTS WLAN (2.4GHz)	Band-edge	802.11b 2462 MIMO	2462 MHz	54 dBuV/m	41.59 dBuV/m	41.71 dBuV/m	0.12 dB	
	Spurious	802.11b 2462 MIMO	4924 MHz	54 dBuV/m	46.73 dBuV/m	37.58 dBuV/m	-9.15 dB	
	Band-edge	802.11g 2462 MIMO	2462 MHz	54 dBuV/m	50.84 dBuV/m	41.33 dBuV/m	-9.51 dB	
	Spurious	802.11g 2437 MIMO	9748 MHz	74 dBuV/m	47.98 dBuV/m	48.12 dBuV/m	0.14 dB	
	Band-edge	802.11n HT20 2412 MIMO	2412 MHz	54 dBuV/m	51.65 dBuV/m	48.91 dBuV/m	-2.74 dB	
	Spurious	802.11n HT20 2437 MIMO	9748 MHz	74 dBuV/m	47.67 dBuV/m	48.09 dBuV/m	0.42 dB	
	Band-edge	802.11ax HE20 SU 2462 MIMO	2462 MHz	54 dBuV/m	51.68 dBuV/m	51.62 dBuV/m	-0.06 dB	
	Spurious	802.11ax HE20 ORU 2437 MIMO	4874 MHz	54 dBuV/m	36.16 dBuV/m	33.25 dBuV/m	-2.91 dB	

Comparison of two models, upper deviation is within 3 dB range and all test results are under FCC Technical Limits.

## 1.4. REFERENCE DETAIL

Reference application that contains the reused reference data in the individual test reports:

Equipment Class	Reference FCC ID (Parent)	Application Type	Reference Test report number	Exhibit Type	Variant Test Report Number	Data Re-used
DTS	A3LSMS921U	Original Grant	4790976523-E7 (802.11b/g/n/ax)	Test Report	4790976580-E5 (802.11b/g/n/ax)	All
NII	A3LSMS921U	Original Grant	4790976523-E10 (802.11a/n/ac/ax)	Test Report	4790976580-E8 (802.11a/n/ac/ax)	Partial (Note)
6CD	A3LSMS921U	Original Grant	4790976523-E11 (802.11a/ax)	Test Report	4790976580-E9 (802.11a/ax)	All

Note. At the customer's request, the target power was reduced at some points, so only those points were retested and the rest were spot-checked. Please refer to the NII report for related information.

## 2. TEST METHODOLOGY

1. FCC 47 CFR Part 2.
2. FCC 47 CFR Part 15.
3. KDB 558074 D01 DTS Meas Guidance v05r02.
4. KDB 662911 D01 Multiple Transmitter Output v02r01
5. KDB 484596 D01 Referencing Test Data v02r02
6. ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1(3m semi-anechoic chamber)
<input checked="" type="checkbox"/>	Chamber 2(3m semi-anechoic chamber)
<input checked="" type="checkbox"/>	Chamber 3(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 4(3m Full-anechoic chamber)
<input type="checkbox"/>	Chamber 5(3m Full-anechoic chamber)

UL KOREA LTD. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 28.9 \text{ dBuV/m} &= 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} \end{aligned}$$

$$\begin{aligned} \text{AC Corrected Reading (dBuV)} &= \text{Measured Voltage (dBuV)} + \text{Extension Cord Loss} \\ &\text{(dB)} + \text{Cable Loss (dB)} \\ 44.72 \text{ dBuV} &= 34.72 \text{ dBuV} + 9.9 \text{ dB} + 0.1 \text{ dB} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.80 dB
Radiated Disturbance, 9 kHz to 30 MHz	1.69 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.92 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.06 dB
Radiated Disturbance, Above 18 GHz	6.02 dB

Uncertainty figures are valid to a confidence level of 95%.

### 4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 2, Clause 4.4.3 in IEC Guide 115:2021.

## 5. EQUIPMENT UNDER TEST

### 5.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC and WPT. This test report addresses the DTS(WLAN) operational mode.


Representative model	Difference	Derivative model
		SCG25
SC-51E	Hardware	Same as SC-51E
	Software	Different UI

The model SC-51E was used for final testing and is representative of the test results in this report.

#### WiFi operating mode

Frequency rage	Mode	ANT 1	ANT 2
2.4GHz (2412 MHz ~ 2472 MHz)	802.11b MIMO		TX/RX
	802.11g MIMO		TX/RX
	802.11n(HT20) MIMO		TX/RX
	802.11ax(HE20) MIMO		TX/RX

#### 802.11ax RU allocations

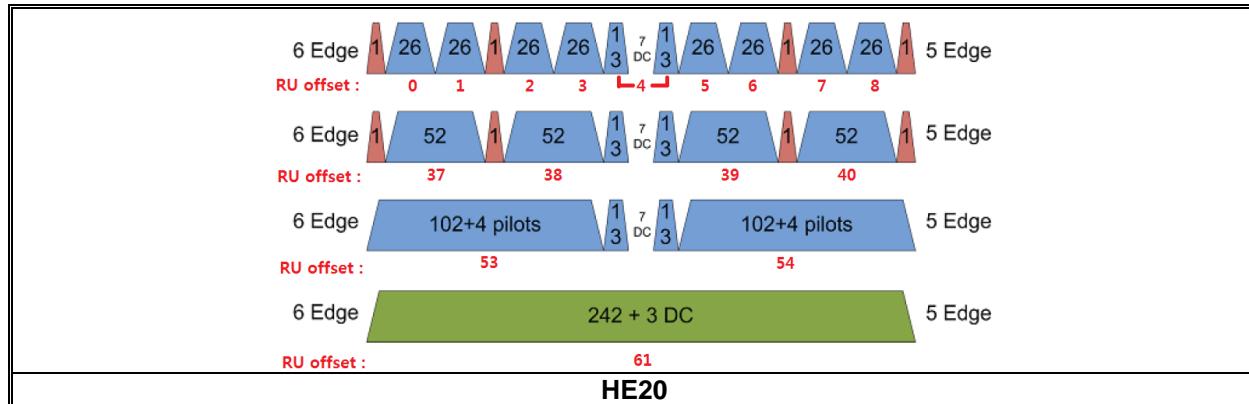

#### Test RU offset for tones

Mode	Tones number in RU	RU offset
HE20	26T	0
		4
		8
	52T	37
		38
		40
	106T	53
		54
	242T / SU Note 1	61 / -

Note. Full RU(Resource Unit) 242T mode and SU(Single Unit) mode have no difference in physical waveform. This report has been reported the SU mode with highest output power in MIMO.

## 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Frequency Range [MHz]	Mode	Output Power [dBm]		Output Power [mW]	
		ANT1	ANT2	ANT1	ANT2
2412 - 2472	802.11b MIMO	21.02		126.47	
	802.11g MIMO	20.52		112.71	
	802.11n(HT20) MIMO	20.46		111.17	
	802.11ax(HE20) MIMO	20.13		103.03	

## 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.  
Therefore, this E.U.T Complies with the requirement of §15.203.**

Bands [MHz]	ANT 1 [dBi]	ANT 2 [dBi]	Correlated Directional Gain [dBi]
2 412 ~ 2 472	-2.44	-3.89	-0.12

Directional gain for the MIMO operations is determined using KDB 662911 D01 Multiple Transmitter Output section F (2)(d)(1) for *Unequal antenna gains, with equal transmit powers*. The gain is calculated using the formula for correlated transmissions across the two transmit antennas. Directional gain =  $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$  dBi.

Sample calculation for this device with  $N_{ANT} = 2$

Directional gain =  $10 \log[(10^{0.40/20} + 10^{0.30/20})^2 / 2] = 3.36$  dBi

“Wi-Fi1 - SUB4 ANT” and “Wi-Fi2 - SUB6 ANT” as indicated in antenna specification are written as ANT1 and ANT2 in this report.

## 5.4. List of test reduction and modes covering other modes:

The output power on covered modes is equal to or less than one referenced.

Authorized Frequency Band			
Mode	Antenna Stream	Mode	Covered by
802.11ac VHT20	MIMO	802.11ac VHT20 2TX	802.11n HT20 2TX

## 5.5. TESTED CHANNELS LIST

Ch.	Frequency [MHz]	11b		11g		11n(HT20)		11ax(HE20)	
		SISO	MIMO	SISO	MIMO	SISO	MIMO	SISO	MIMO
1	2 412		O		O		O		O
2	2 417				O		O		O
6	2 437		O		O		O		O
11	2 462		O		O		O		O
12	2 467		O		O		O		O
13	2 472		O		O		O		O

Note. SISO mode test was performed only to check average power. Because MIMO mode target power is 3dB higher than SISO mode.

## 5.6. WORST-CASE CONFIGURATION AND MODE

Both SISO and MIMO have been investigated and confirmed MIMO was the worst case set for radiated band edge and spurious emission tests.

The fundamentals of the EUT were investigated in three orthogonal orientations X, Y and Z on 2TX MIMO mode. It was determined that X orientation was the worst-case orientation for 2TX MIMO mode.

Radiated and power line conducted tests were performed with EUT connected to AC power adapter as the worst-case configuration. Radiated harmonics spurious 1~18 GHz Low/Mid/High channels, 18-26GHz were performed with the EUT set at the 2TX MIMO mode. Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Simultaneous transmission with related transmitters were investigated and no noticeable emission was found.

For 802.11ax mode, output power and PSD tests were investigated between all different tones and found that SU mode had the highest output power and RU 26T has the highest PSD readings which was documented in this report. And after some pre-tests, SU mode was determined as the worst case set for final conducted/radiated band edge tests with some spot-check performed at the lowest RU offset of the lowest frequency and the highest RU offset of the highest frequency.

For conducted/radiated spurious tests, 802.11ax SU mode has lower PSD results than 802.11ax RU 26T and therefore, 802.11ax RU 26T's highest power offset was set for full test.

In case of 6dB Bandwidth, it was tested at the RU allocation with lowest tones number, RU 26Tones as the worst-case scenario.

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps 2TX

802.11g mode: 6 Mbps 2TX

802.11n HT20 mode: MCS0 2TX

802.11ax HE20 mode: MCS0 2TX

## 5.7. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37W61WENTASEA	N/A
Data Cable	SAMSUNG	EP-DN980	GH39-02117A	N/A


### I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A


### TEST SETUP

The EUT is a stand-alone unit during the tests.  
Test software in hidden menu exercised the EUT to enable DTS mode.

**SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)**

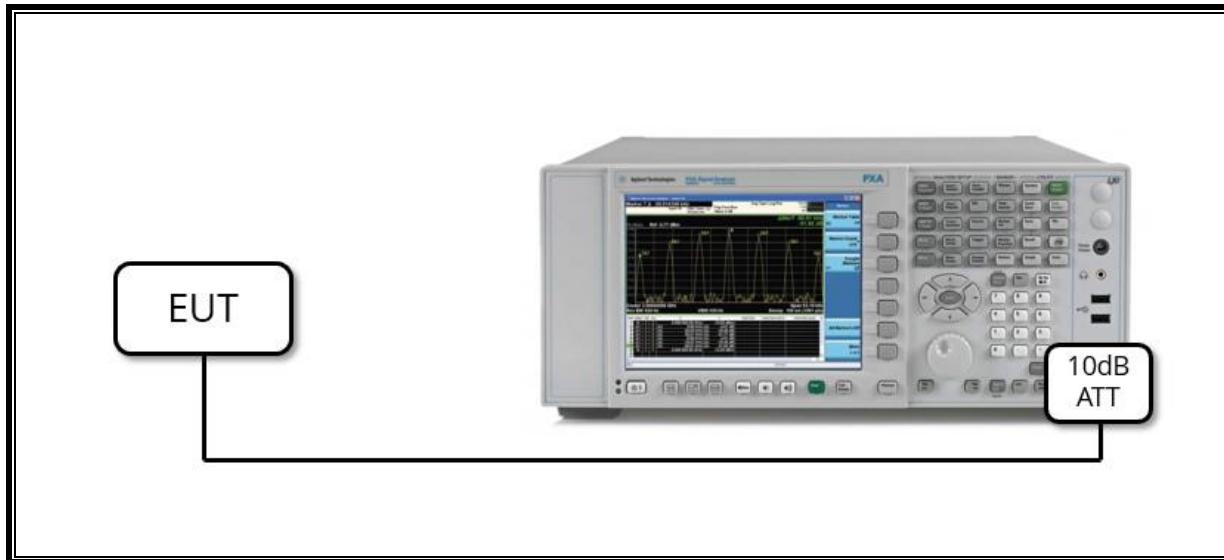

**SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)**

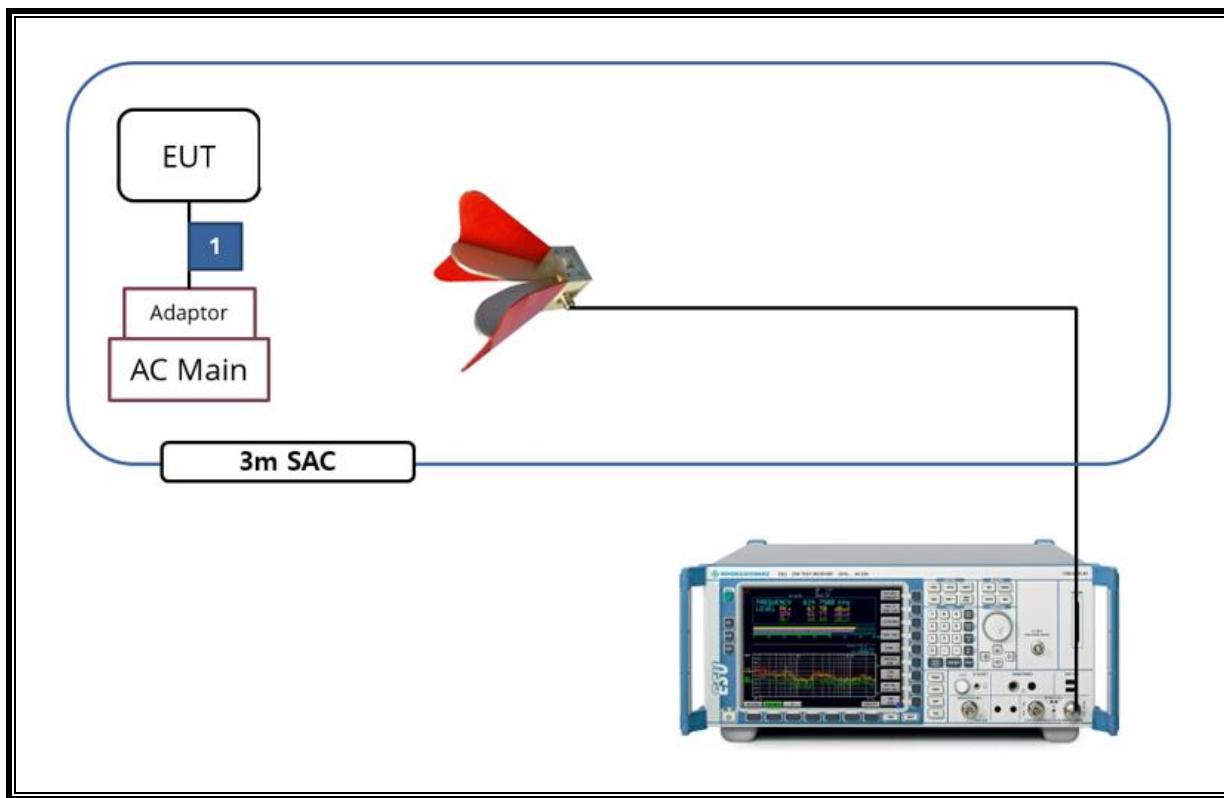

## 6. MEASUREMENT METHOD

6 dB BW : ANSI C63.10-2013, Section 11.8.2 Option 2

OUTPUT POWER : ANSI C63.10-2013, Section 11.9.2.3.1 Method AVGPM

POWER SPECTRAL DENSITY : ANSI C63.10-2013, Section 11.10.3 & 11.10.5 Method AVGPSD-1 and Method AVGPSD-2

Out-of-band Emissions (Conducted) : ANSI C63.10-2013, Section 11.11 Emissions in nonrestricted frequency bands

Out-of-band Emissions in Non-restricted Bands: ANSI C63.10-2013, Section 11.11 Emissions in nonrestricted frequency bands

Out-of-band Emissions in Restricted Bands : ANSI C63.10-2013, Section 11.12 Emissions in restricted frequency bands

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2

## 7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, BiLog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	2024-08-15
Antenna, Horn, 18 GHz	ETS	3117	00168717	2024-08-21
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2024-08-02
Preamplifier	ETS	3116C-PA	00168841	2024-07-25
Preamplifier, 1000 MHz	Sonoma	310N	341282	2024-07-24
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	2024-07-24
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	2024-07-25
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	2024-07-24
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9040B	MY60080268	2025-01-03
Average Power Sensor	Agilent / HP	U2000A	MY54270007	2024-07-23
Average Power Sensor	Agilent / HP	U2000A	MY54260010	2024-07-24
Attenuator	PASTERNACK	PE7087-10	A001	2024-07-23
Attenuator	PASTERNACK	PE7087-10	A008	2024-07-27
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2024-07-23
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2024-07-24
EMI Test Receive, 3 GHz	R&S	ESR3	101832	2024-07-23
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	2024-07-23
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	2024-07-23
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	2024-07-24
LISN	R&S	ENV-216	101837	2024-07-23
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2025-09-06
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

## 8. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.247 (a)(2)	Occupied Bandwidth(6dB)	> 500kHz	Conducted	Complies
2.1051, 15.247(d)	Band Edge / Conducted Spurious Emission	-30 dBc		Complies
15.247 (b)(3)	TX conducted output power	< 30 dBm		Complies
15.247(e)	PSD	< 8 dBm/3kHz		Complies
15.207(a)	AC Power Line conducted emissions	Section 11	Power Line conducted	Complies
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m(Av)	Radiated	Complies

## 9. ANTENNA PORT TEST RESULTS

### 9.1. ON TIME AND DUTY CYCLE

#### LIMITS


None; for reporting purposes only.

Mode	On Time [ms]	Period [ms]	Duty Cycle X [Linear]	Duty Cycle X [%]	Duty Cycle Correction Factor[dB]	1/T Minimum VBW[kHz]
802.11b MIMO	8.815	8.918	0.988	98.845	-	0.11
802.11g MIMO	2.828	2.936	0.963	96.322	0.16	0.35
802.11n(HT20) MIMO	5.279	5.388	0.980	97.977	0.09	0.19
802.11ax(HE20) MIMO SU	5.451	5.470	0.997	99.653	-	0.18
802.11ax(HE20) MIMO 26T	2.596	2.621	0.990	99.046	-	0.39
802.11ax(HE20) MIMO 52T	2.592	2.617	0.990	99.045	-	0.39
802.11ax(HE20) MIMO 106T	1.435	1.461	0.982	98.220	-	0.70

Note. According to ANSI C63.10 Section 11.6, do not apply the Duty Cycle Correction Factor judging that a duty cycle of greater than or equal to 98% is continuous signal.



802.11g

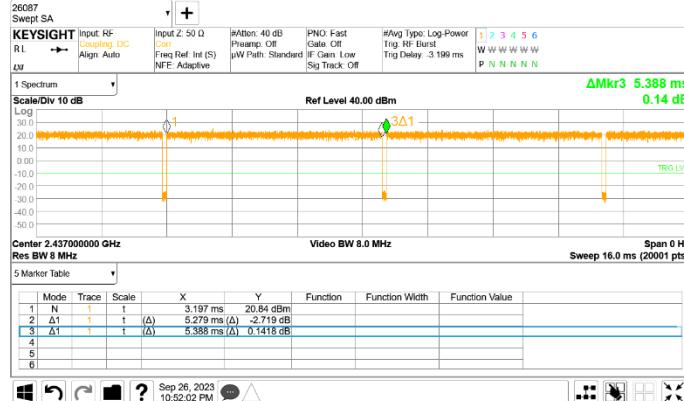

802.11n20

## 9.2. 6 dB BANDWIDTH

### LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.


### TEST PROCEDURE

Reference to KDB 558074 D01 15.247 Meas Guidance: The transmitter output is connected to a spectrum analyzer with the RBW set to 100 kHz, the VBW  $\geq 3 \times$  RBW, peak detector and max hold.

### RESULTS

- Please refer to the next page

### WORST CASE TEST PLOTS

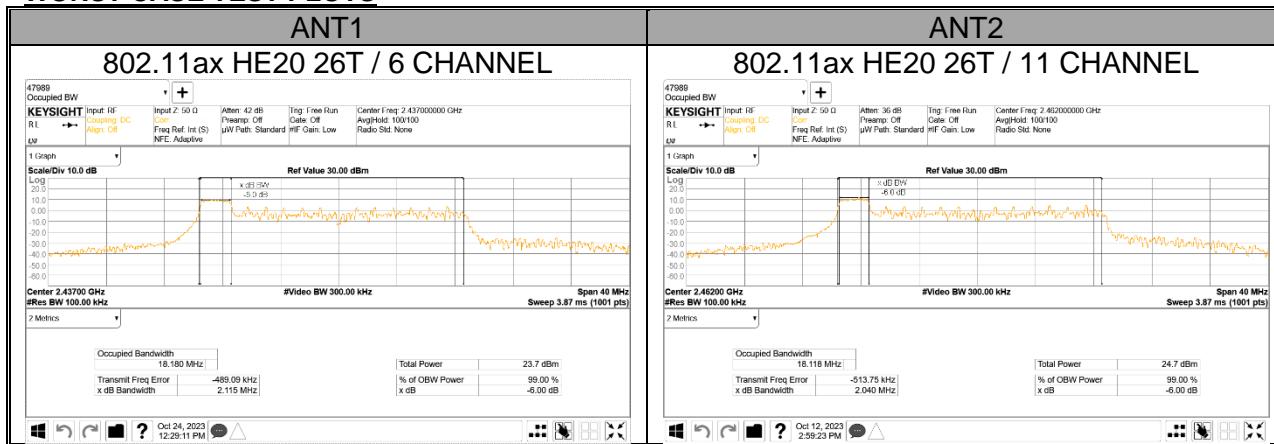

### 9.2.1. 802.11b MIMO MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
		ANT 1	ANT 2	
1	2 412	9.106	9.600	0.5
6	2 437	9.134	9.571	
11	2 462	9.087	9.553	
12	2 467	9.117	9.118	
13	2 472	9.149	9.066	
Worst		9.087	<b>9.066</b>	

### 9.2.2. 802.11g MIMO MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
		ANT 1	ANT 2	
1	2 412	16.350	16.320	0.5
2	2 417	16.090	16.320	
6	2 437	16.360	16.360	
11	2 462	16.080	16.350	
12	2 467	16.060	16.370	
13	2 472	16.350	15.950	
Worst		16.060	<b>15.950</b>	

### 9.2.3. 802.11n HT20 MIMO MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
		ANT 1	ANT 2	
1	2 412	17.600	17.200	0.5
2	2 417	17.340	17.330	
6	2 437	17.610	17.600	
11	2 462	17.210	17.310	
12	2 467	16.950	17.580	
13	2 472	17.630	16.590	
Worst		16.950	<b>16.590</b>	

### 9.2.4. 802.11ax HE20(26T) MIMO MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
		ANT 1	ANT 2	
1	2 412	2.127	2.116	0.5
2	2 417	2.130	2.067	
6	2 437	2.115	2.092	
11	2 462	2.125	2.040	
12	2 467	2.129	2.105	
13	2 472	2.148	2.099	
Worst		2.115	<b>2.040</b>	

### 9.3. OUTPUT POWER

#### LIMITS

FCC §15.247 (b) (3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### TEST PROCEDURE

Measurements perform using a wideband RF frame average power sensor.  
The cable assembly insertion loss and duty cycle correction factor was entered as an offset in the power sensor to allow for direct reading of power.

Output power measurement was performed utilizing the 8.3.2.3 under KDB558074 D01 15.247 Meas Guidance.

#### DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains.  
The directional gain is:

Bands [MHz]	ANT 1 [dBi]	ANT 2 [dBi]	Correlated Directional Gain [dBi]
2 412 - 2 472	-2.44	-3.89	-0.12

Note. Since the correlated directional gain does not exceed 6dBi, it is not mentioned further below.

### 9.3.1. TEST RESULTS

#### - 802.11b,g,n,ax(SU) mode

Mode	Channel	Frequency [MHz]	SISO Average Power [dBm]		MIMO Average Power [dBm]			Power Limit [dBm]
			ANT1	ANT2	ANT1	ANT2	Total Corr'd Power [dBm]	
802.11b	1	2 412	18.08	17.97	18.01	18.01	21.02	30.00
	6	2 437	18.37	17.21	18.05	17.24	20.67	
	11	2 462	18.00	17.58	17.82	17.58	20.71	
	12	2 467	5.43	4.91	5.28	4.61	7.97	
	13	2 472	-0.24	-0.17	0.25	-0.39	2.95	
	<b>Worst Case</b>		18.37	17.97			<b>21.02</b>	
					15.72	15.52	18.63	
802.11g	1	2 412	15.74	15.65	17.05	16.86	19.97	30.00
	2	2 417	17.13	16.93	17.56	17.46	20.52	
	6	2 437	17.59	17.14	17.25	17.42	20.35	
	11	2 462	17.34	17.07	5.22	5.17	8.21	
	12	2 467	5.31	5.31	-0.60	-1.19	2.13	
	13	2 472	-0.50	-0.44			<b>20.52</b>	
	<b>Worst Case</b>		17.59	17.14			<b>20.52</b>	
802.11n HT20	1	2 412	15.22	15.09	15.17	15.14	18.17	30.00
	2	2 417	17.07	17.02	17.02	16.91	19.98	
	6	2 437	17.58	17.48	17.54	17.35	20.46	
	11	2 462	17.24	17.52	17.13	17.38	20.27	
	12	2 467	5.23	5.25	5.14	5.00	8.08	
	13	2 472	-0.51	-0.48	-0.61	-1.31	2.06	
	<b>Worst Case</b>		17.58	17.52			<b>20.46</b>	
802.11ax HE20(SU)	1	2 412	15.49	15.72	15.43	15.63	18.54	30.00
	2	2 417	16.93	17.22	16.75	16.82	19.80	
	6	2 437	17.01	17.03	17.40	16.81	20.13	
	11	2 462	17.10	17.12	16.88	16.96	19.93	
	12	2 467	5.54	5.14	5.23	4.97	8.11	
	13	2 472	-0.81	-0.71	-0.44	-1.48	2.08	
	<b>Worst Case</b>		17.10	17.22			<b>20.13</b>	

- Calculation of Output Power result

Average Power = Meas. Power + Duty Cycle CF / Total Corr'd Power = ANT1's Average Power + ANT2's Average Power

- 802.11ax (RU) mode

Channel	Frequency [MHz]	Tones	RU Offset	SISO Average Power [dBm]		MIMO Average Power [dBm]			Power Limit [dBm]	
				ANT1	ANT2	ANT1	ANT2	Total Corr'd Power [dBm]		
1	2 412	26T	0	15.09	15.22	15.07	15.20	18.15	30.00	
			4	15.29	15.50					
			8	14.72	15.40					
2	2 417	26T	0	15.61	15.00	15.60	14.40	18.05		
			4	14.82	15.10					
			8	14.73	15.53					
6	2 437	26T	0	15.61	14.92	15.47	15.79	18.64		
			4	15.22	15.13					
			8	15.85	14.80					
11	2 462	26T	0	14.98	14.98	15.39	14.73	18.08		
			4	14.94	14.92					
			8	14.96	15.22					
12	2 467	26T	0	5.40	5.10	5.68	4.32	8.06		
			4	5.11	5.41					
			8	5.02	5.11					
13	2 472	26T	0	-0.36	-0.98	-0.06	-1.68	2.22		
			4	-0.89	-0.97					
			8	-0.79	-0.96					
<b>Worst Case</b>				<b>15.85</b>	<b>15.53</b>			<b>18.64</b>		

## 9.4. POWER SPECTRAL DENSITY

### LIMITS

FCC §15.247 (e)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


### TEST PROCEDURE

Power Spectral Density was performed utilizing the section 8.4 under KDB558074 D01 15.247 Meas Guidance.

### RESULTS

- Please refer to the next page

### WORST CASE TEST PLOTS

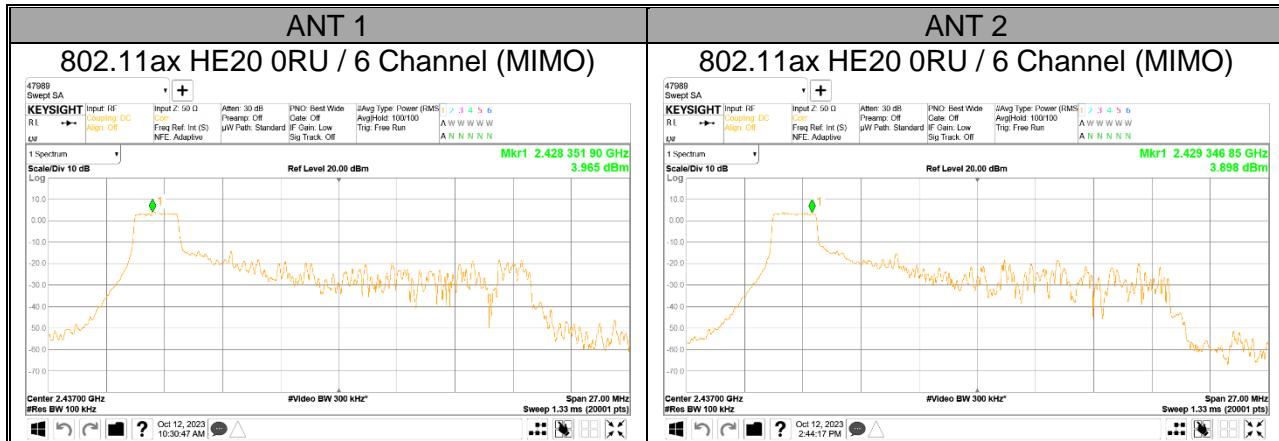

### 9.4.1. 802.11b/g/n HT20/ax HE20 MODE TEST RESULTS

#### - MIMO Mode

Mode	Channel	Frequency [MHz]	Meas PSD [dBm/100kHz]		DCCF	Total Corr'd PSD [dBm/100kHz]	PSD Limit [dBm/3kHz]
			ANT1	ANT2			
802.11b	1	2 412	1.416	1.224	-	4.331	8.00 Note
	6	2 437	1.152	0.653	-	3.920	
	11	2 462	0.809	0.940	-	3.885	
	12	2 467	-11.775	-11.891	-	-8.822	
	13	2 472	-17.620	-17.433	-	-14.515	
802.11g	1	2 412	-4.227	-3.551	0.16	-0.706	8.00 Note
	2	2 417	-2.651	-2.594	0.16	0.548	
	6	2 437	-2.749	-3.440	0.16	0.090	
	11	2 462	-2.832	-3.097	0.16	0.208	
	12	2 467	-14.757	-15.488	0.16	-11.937	
	13	2 472	-20.575	-21.268	0.16	-17.737	
802.11n HT20	1	2 412	-5.087	-4.554	0.09	-1.712	8.00 Note
	2	2 417	-2.949	-2.847	0.09	0.203	
	6	2 437	-2.708	-3.224	0.09	0.142	
	11	2 462	-3.381	-3.021	0.09	-0.097	
	12	2 467	-14.964	-15.725	0.09	-12.228	
	13	2 472	-20.809	-21.790	0.09	-18.172	
802.11ax HE20 SU	1	2 412	-7.188	-6.164	-	-3.636	8.00 Note
	2	2 417	-4.859	-3.909	-	-1.348	
	6	2 437	-3.084	-3.643	-	-0.344	
	11	2 462	-3.984	-3.464	-	-0.706	
	12	2 467	-15.381	-16.122	-	-12.725	
	13	2 472	-20.977	-21.815	-	-18.366	

#### - MIMO Mode(802.11ax HE20 RU mode)

Channel	Frequency [MHz]	Tones	RU Offset	Meas PPSD [dBm/100kHz]		DCCF	Total Corr'd PPSD [dBm/100kHz]	PSD Limit [dBm/3kHz]
				ANT1	ANT2			
2	2 417	26T	0	2.859	2.289	-	5.594	8.00 Note
			4	2.756	3.158	-	5.972	
			8	1.565	3.330	-	5.547	
6	2 437	26T	0	3.965	3.898	-	6.942	8.00 Note
			4	3.363	3.537	-	6.461	
			8	4.264	2.419	-	6.449	
11	2 462	26T	0	3.714	3.405	-	6.573	8.00 Note
			4	3.572	2.954	-	6.284	
			8	2.615	4.374	-	6.593	

#### Calculation of Output PSD result

- 1TX : Corr'd PSD = Meas PSD + Duty Cycle CF
  - 2TX : Total PSD = ANT1 Meas PSD + ANT2 Meas PSD + Duty Cycle CF
- Note. RBW 100kHz measurement data is lower than 3kHz limit.

## 9.5. CONDUCTED SPURIOUS EMISSIONS

### LIMITS




FCC §15.247 (d)


Output power was measured based on the use of average measurement, therefore the required attenuation is 30 dB.

### RESULTS


### 9.5.1. 802.11b MODE


#### 2TX Antenna 1

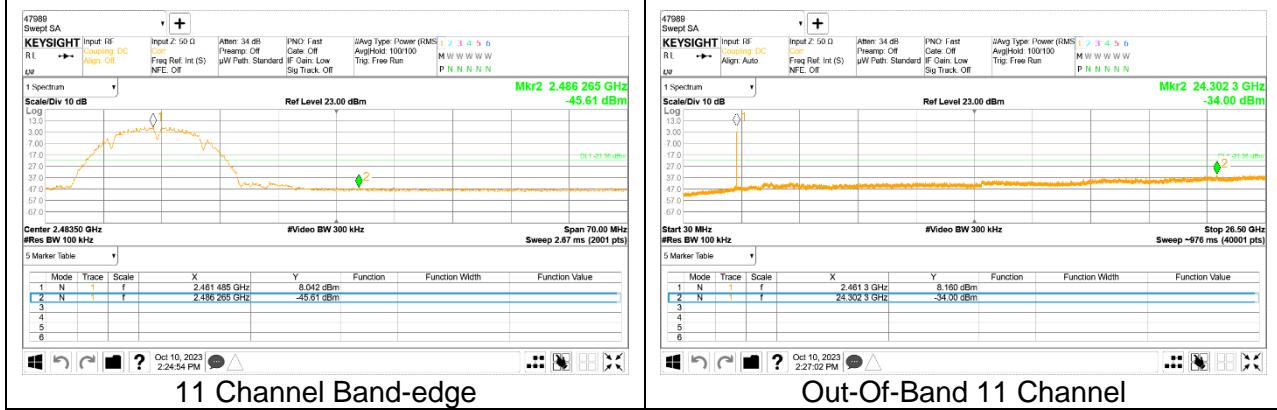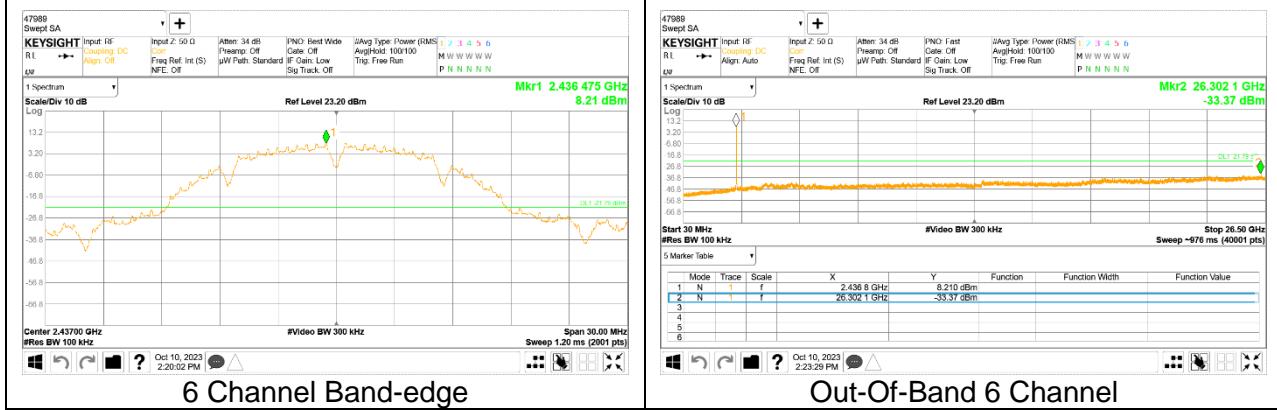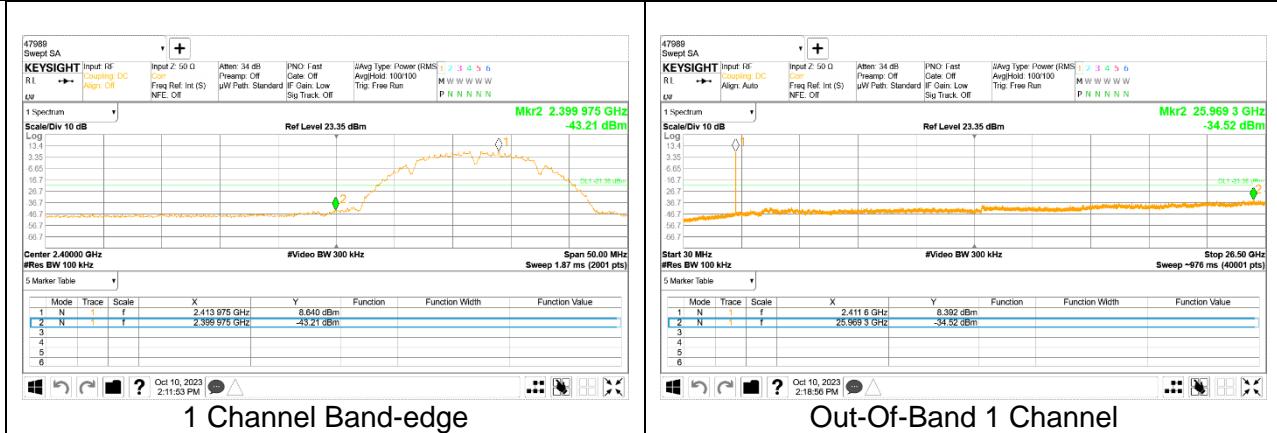

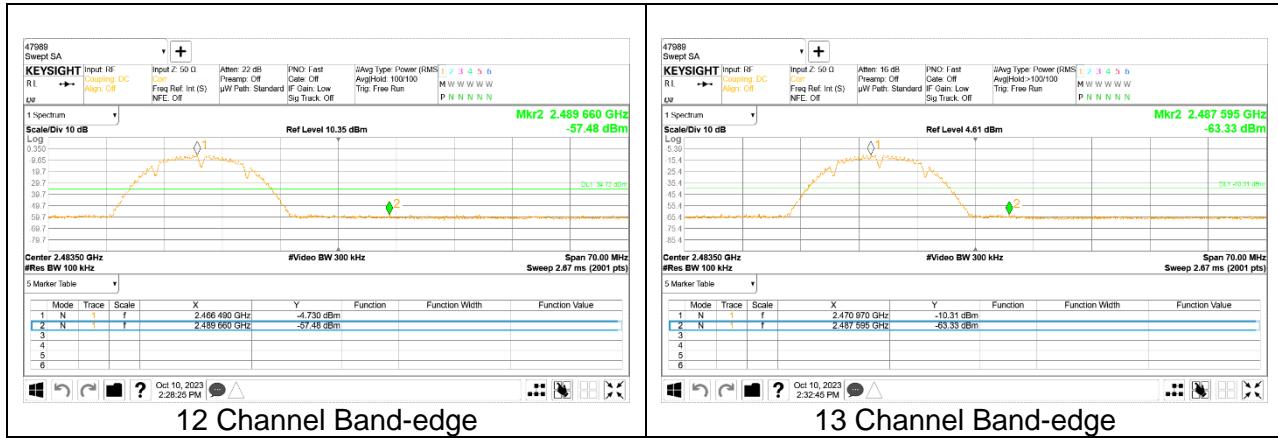




## 2TX Antenna 2

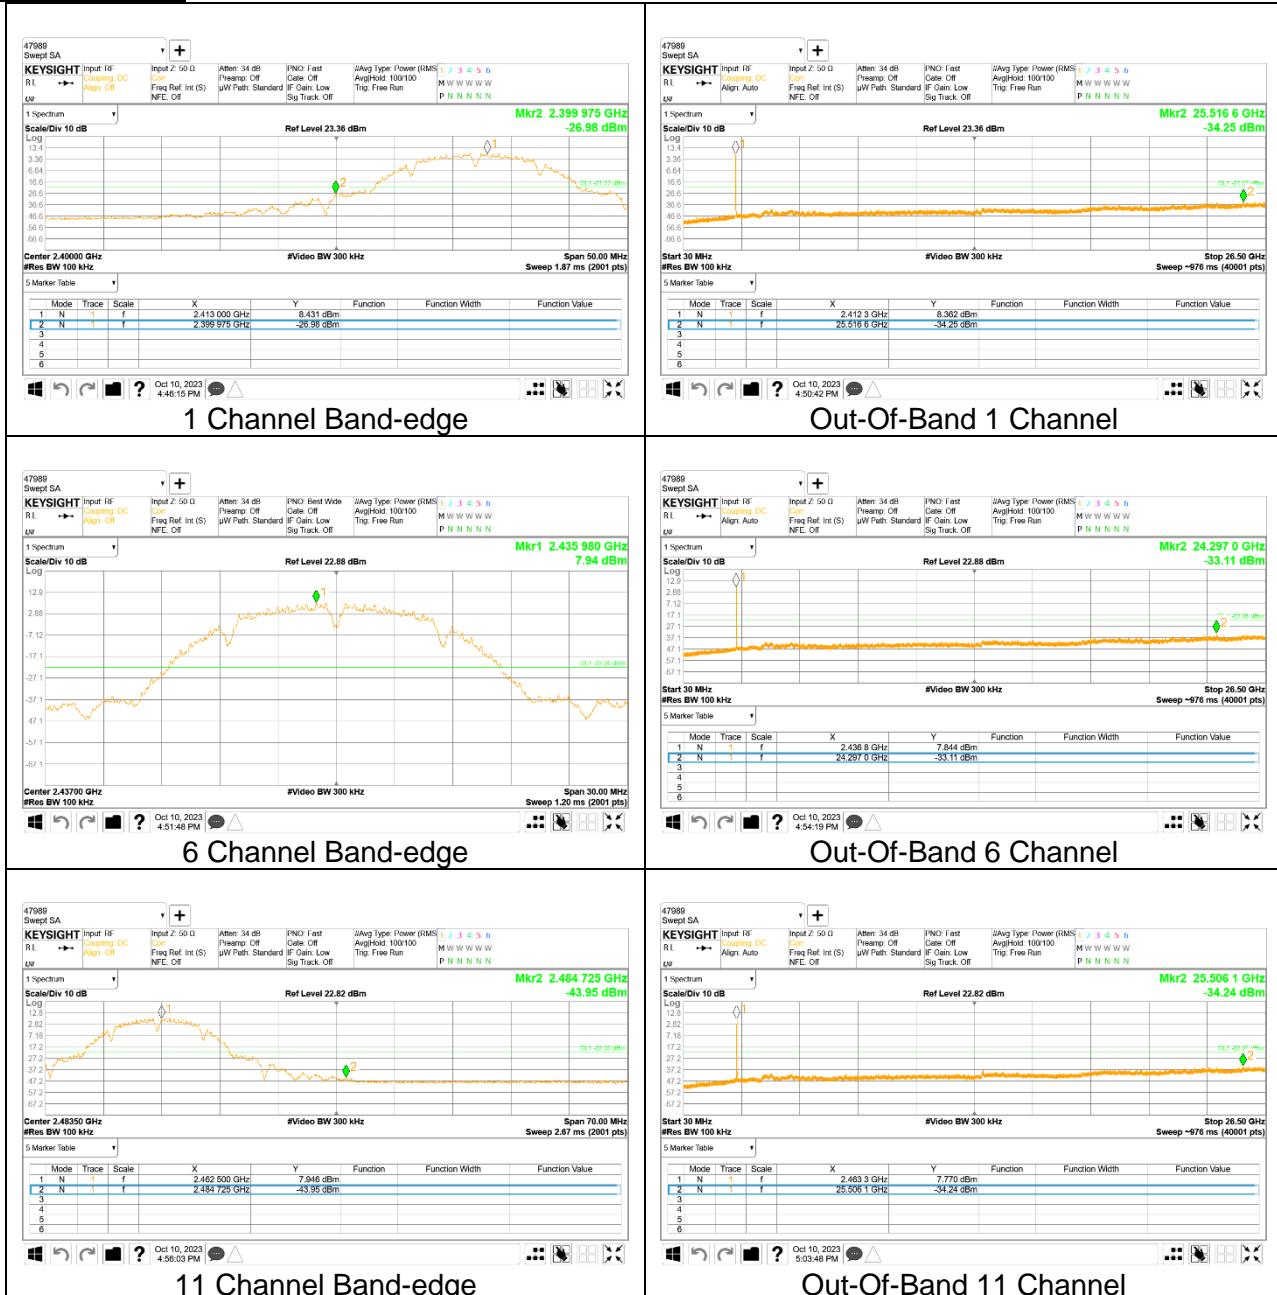


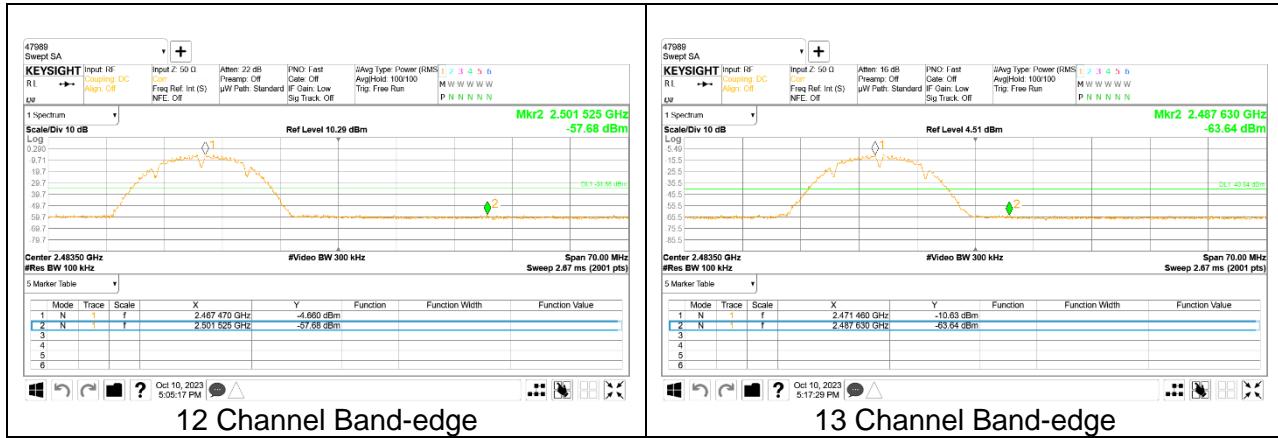


## 9.5.2. 802.11g MODE

### 2TX Antenna 1

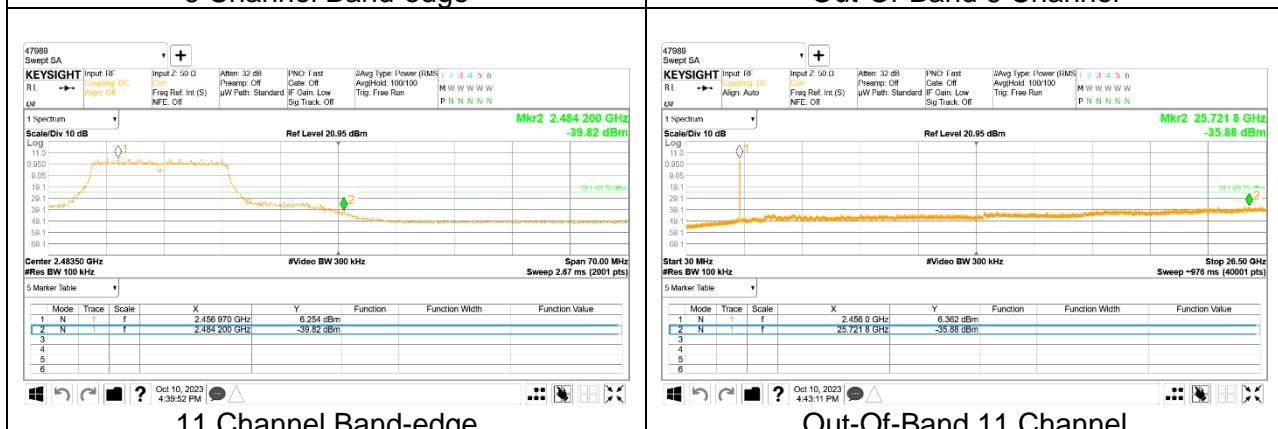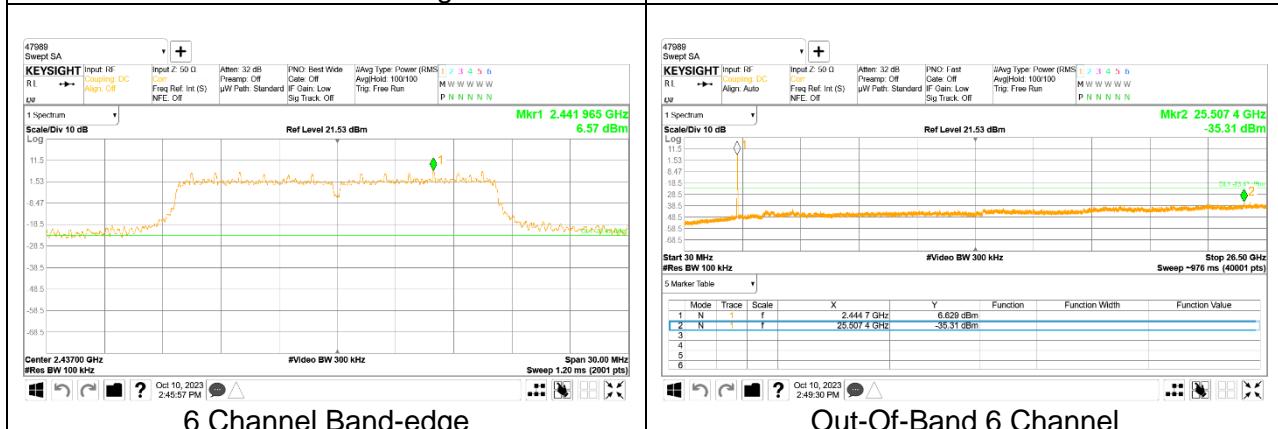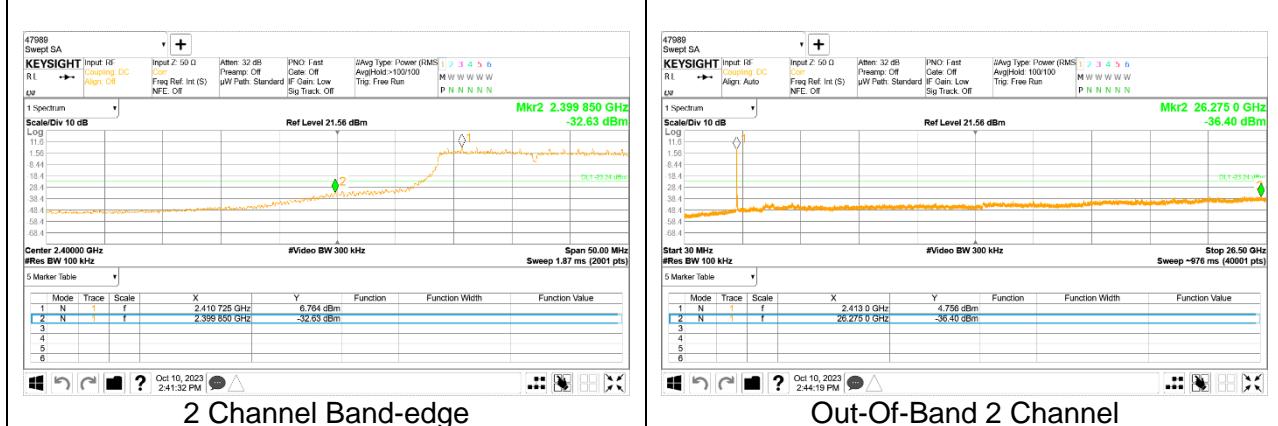

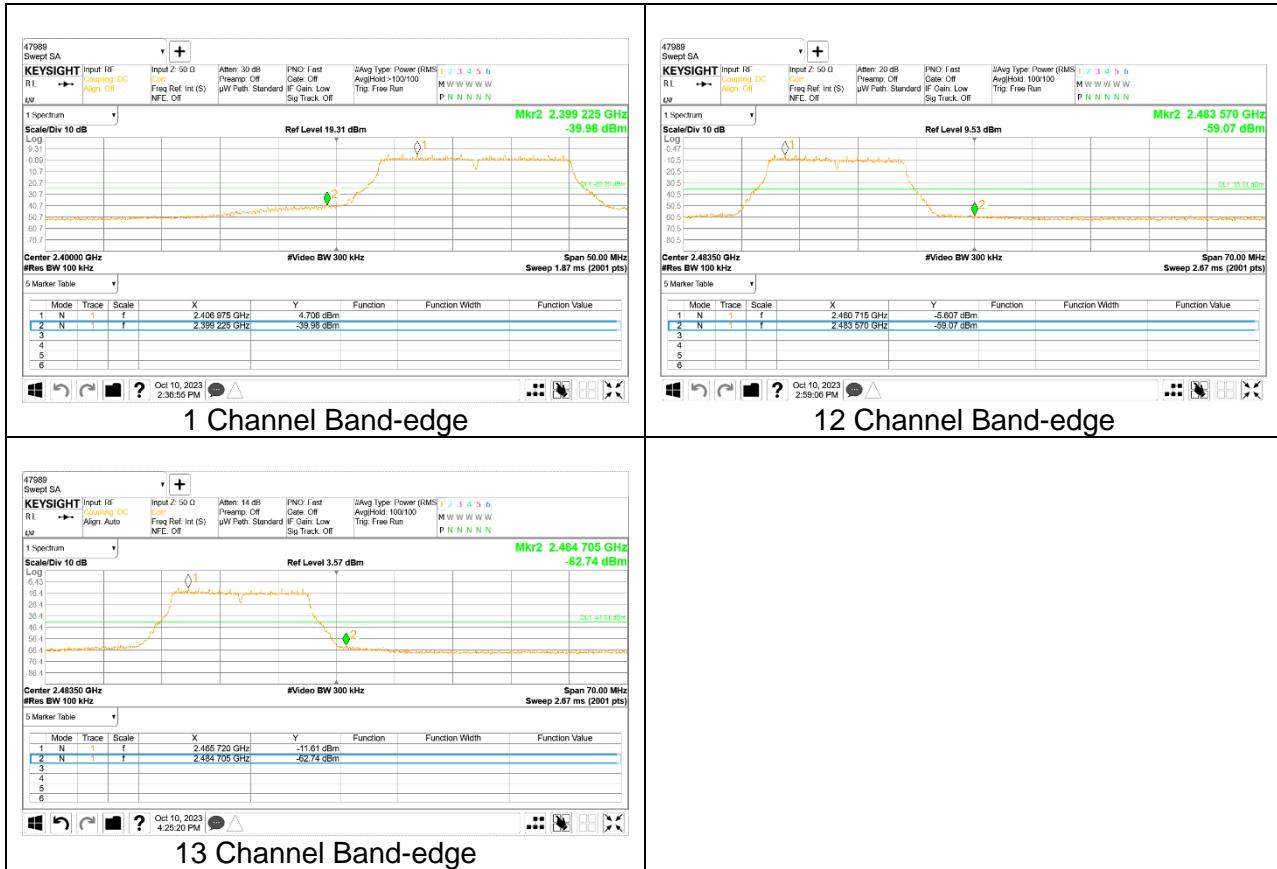


## 2TX Antenna 2

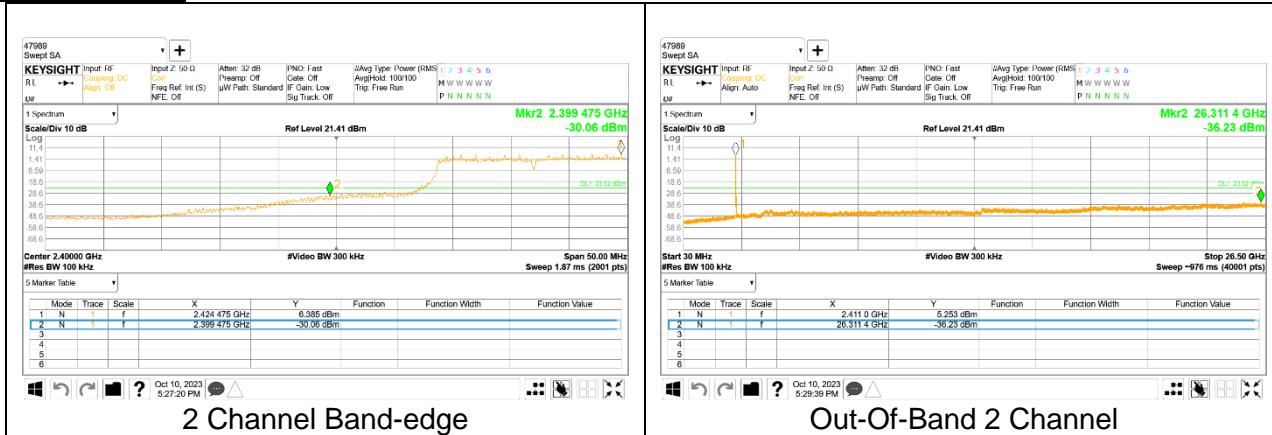


2 Channel Band-edge

Out-Of-Band 2 Channel

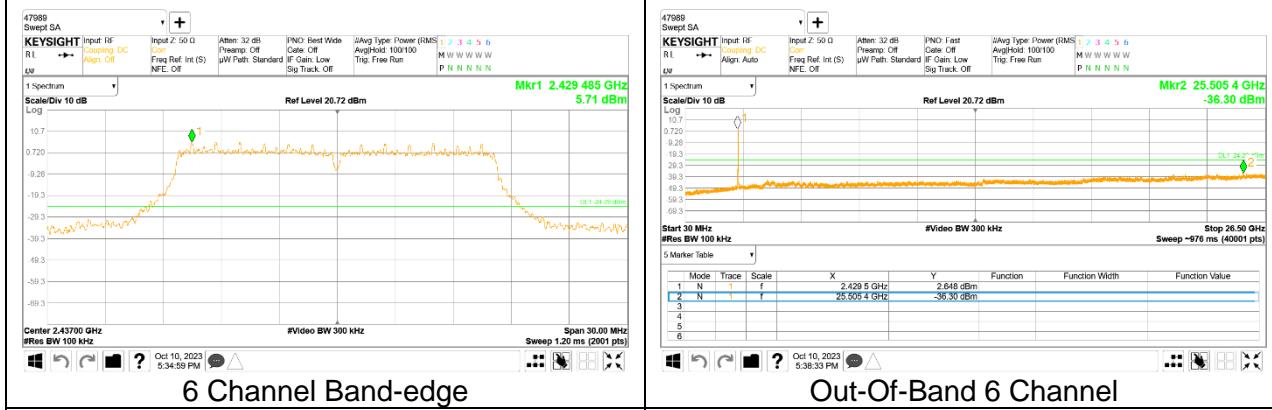


6 Channel Band-edge

Out-Of-Band 6 Channel

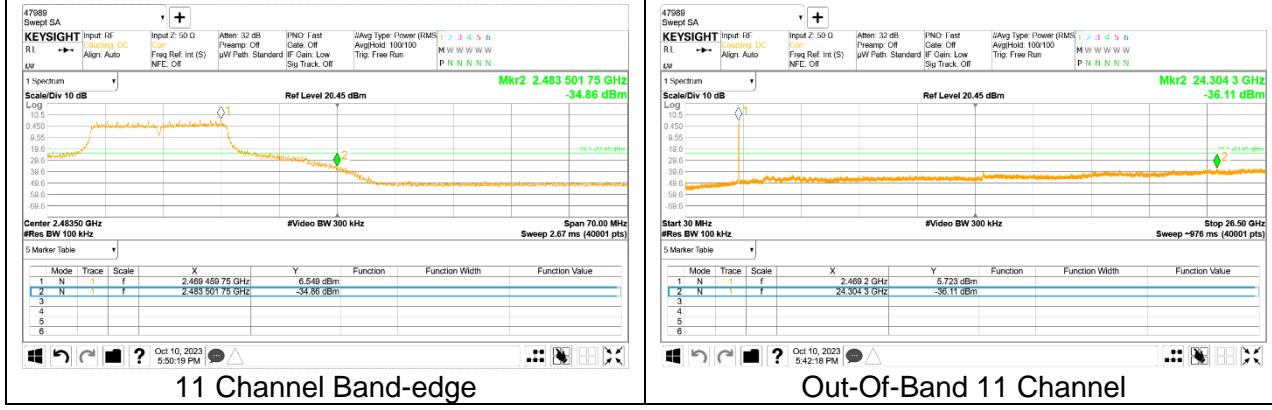


11 Channel Band-edge

Out-Of-Band 11 Channel

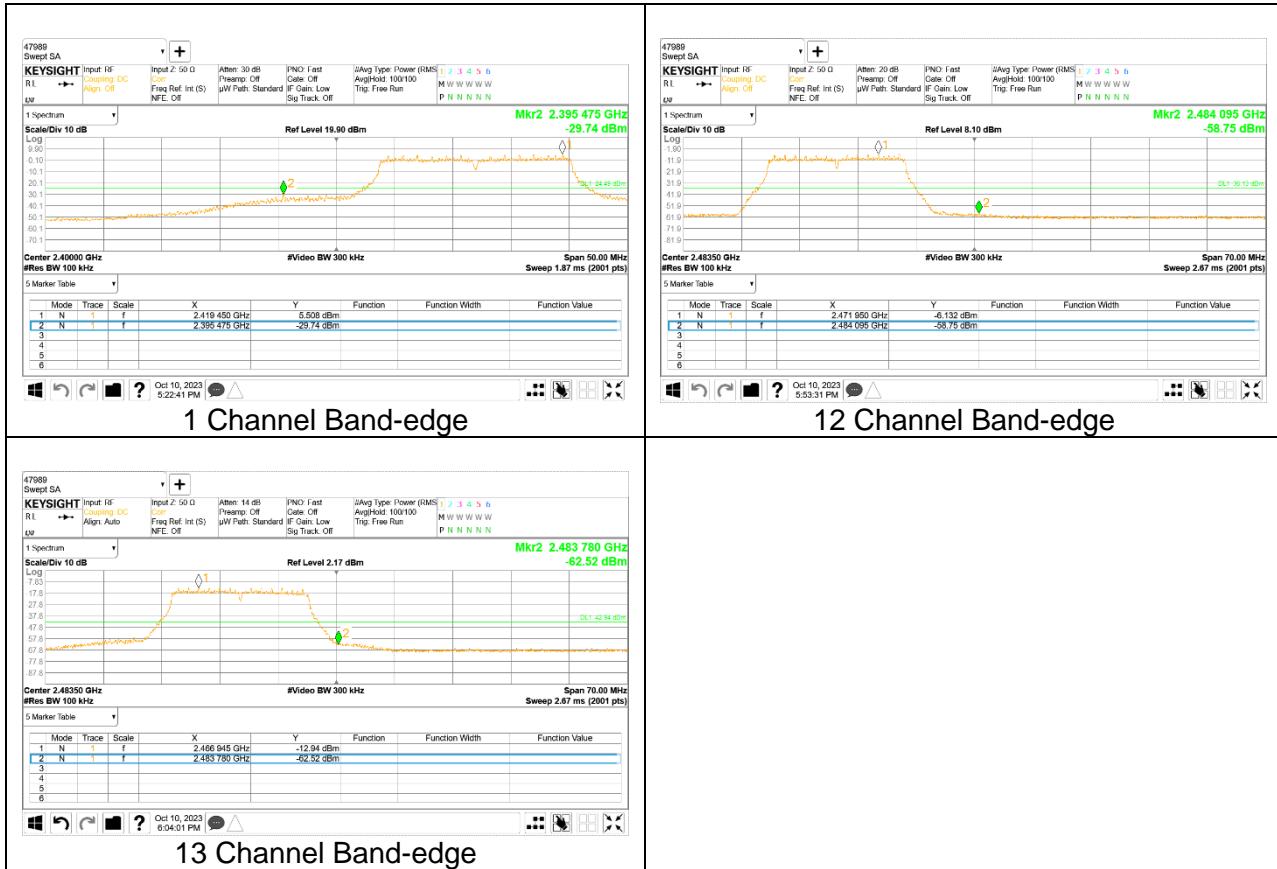


### 9.5.3. 802.11n HT20 MODE

#### 2TX Antenna 1

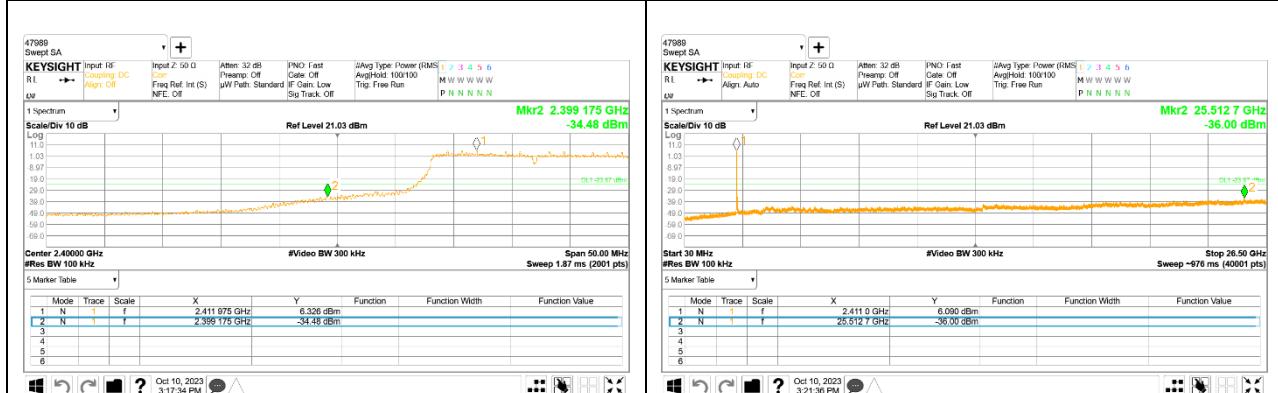


2 Channel Band-edge

Out-Of-Band 2 Channel

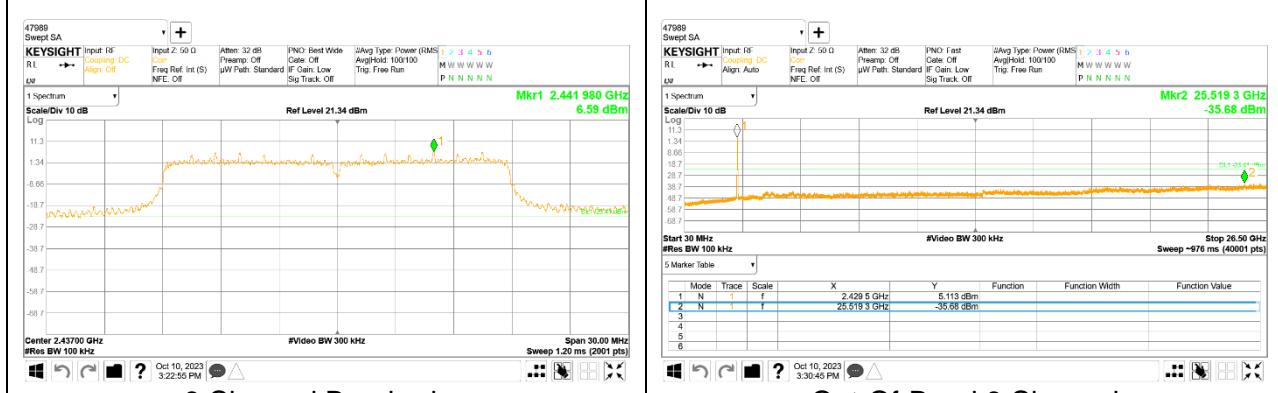


6 Channel Band-edge

Out-Of-Band 6 Channel

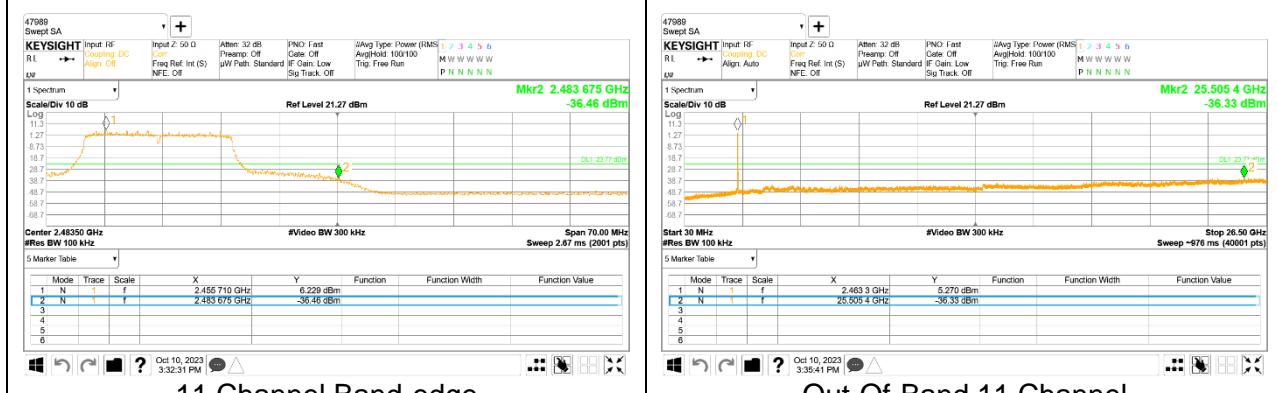

11 Channel Band-edge

Out-Of-Band 11 Channel

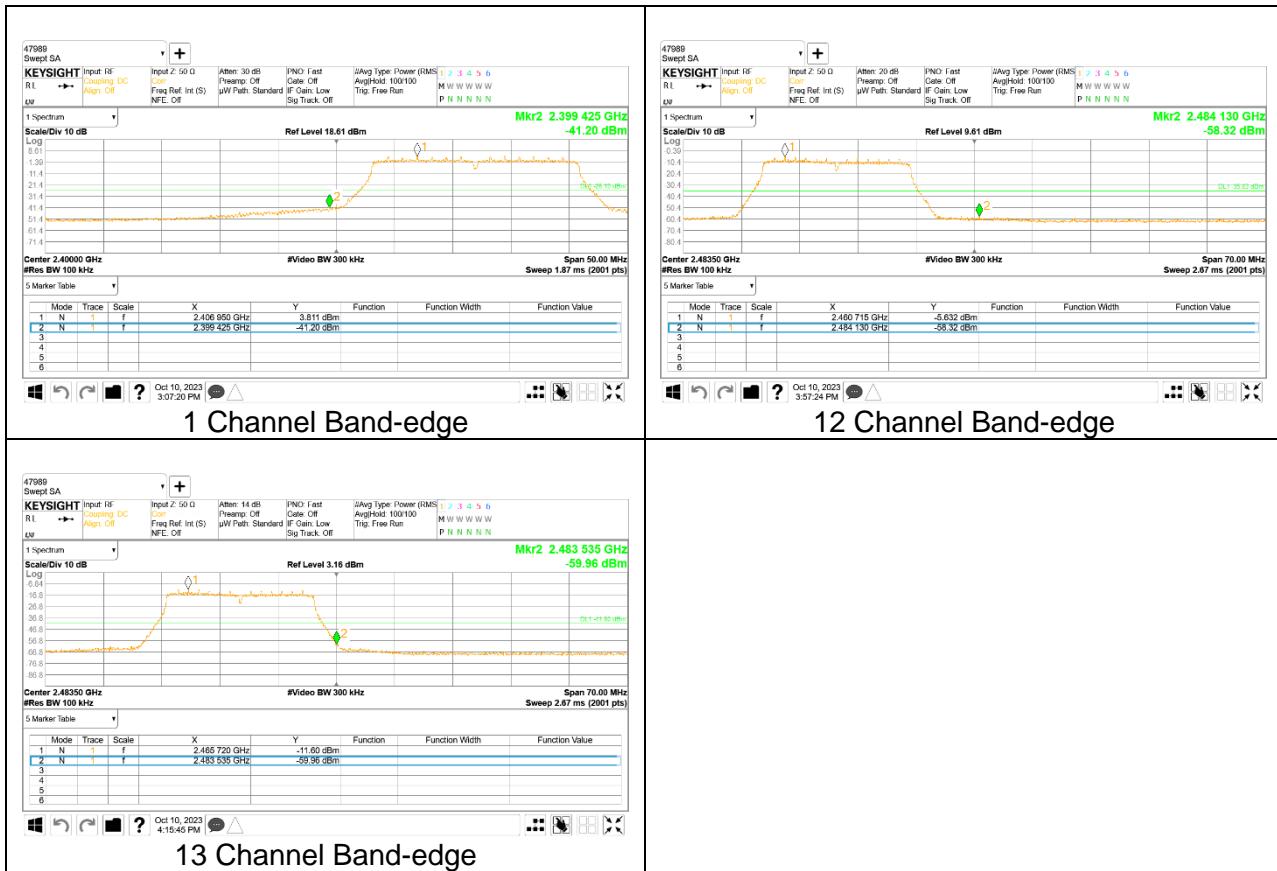


## 2TX Antenna 2




2 Channel Band-edge

Out-Of-Band 2 Channel

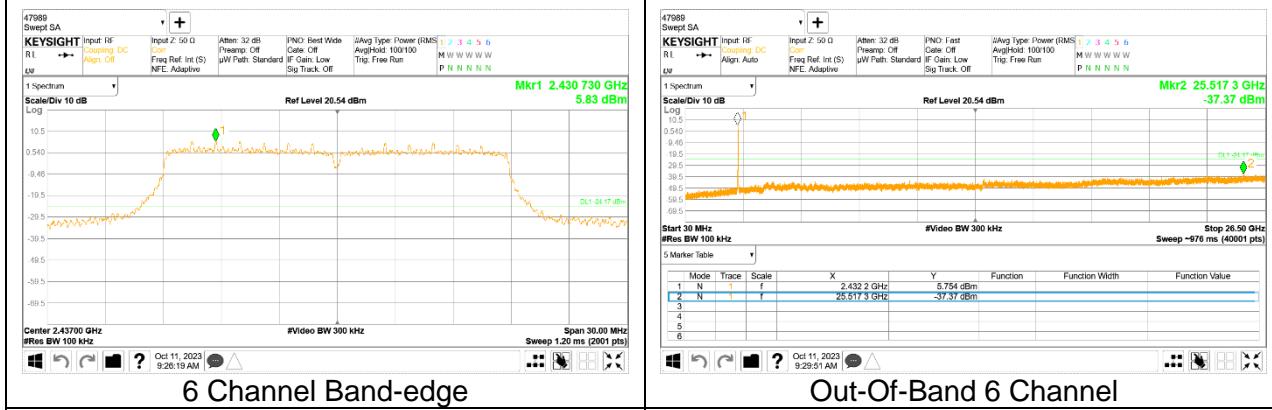


6 Channel Band-edge

Out-Of-Band 6 Channel

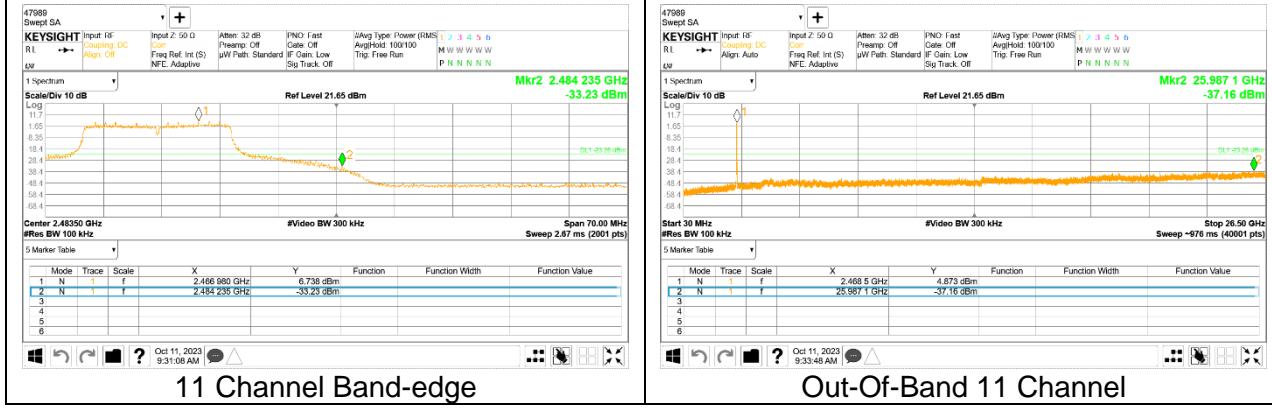

11 Channel Band-edge

Out-Of-Band 11 Channel

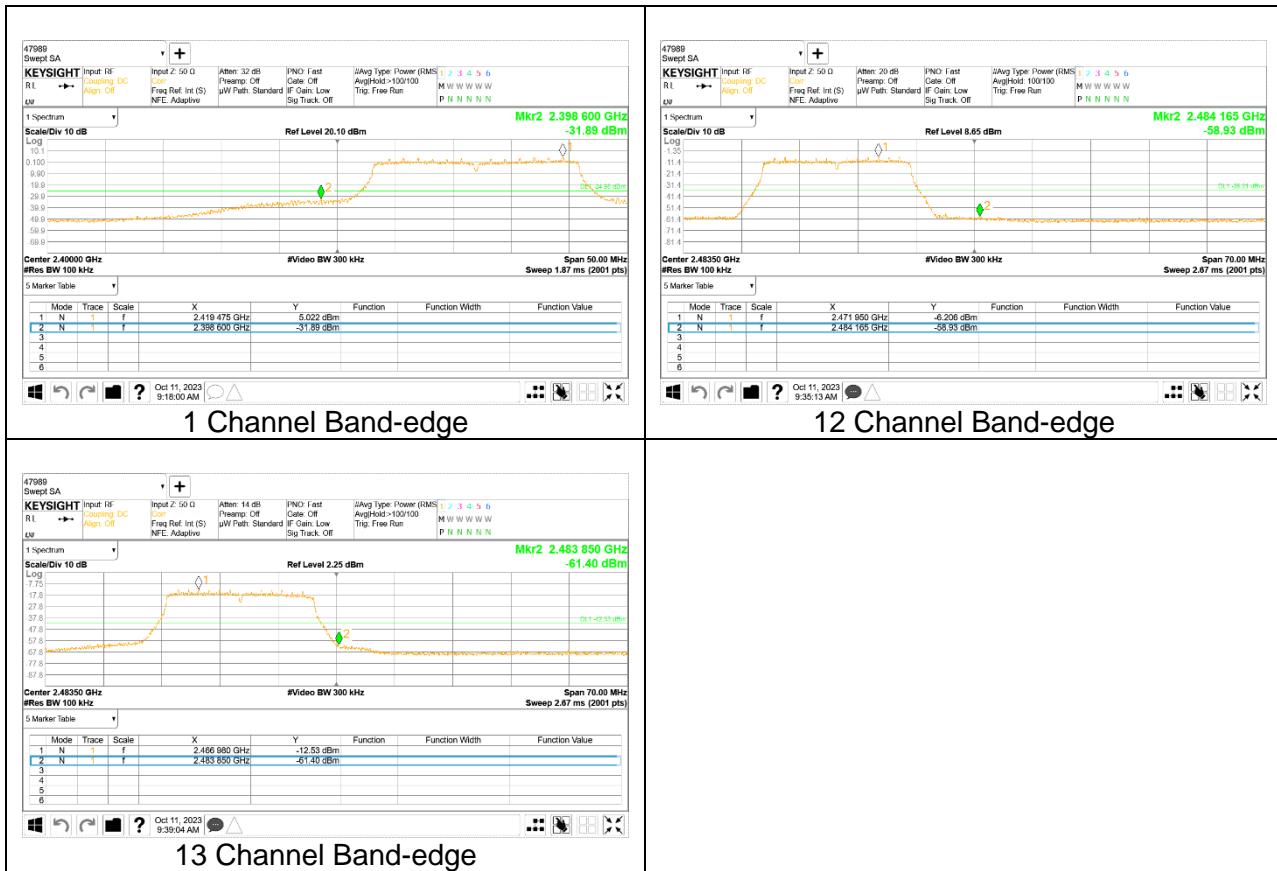


## 9.5.4. 802.11ax HE20(SU) MODE


### 2TX Antenna 1



1 Channel Band-edge

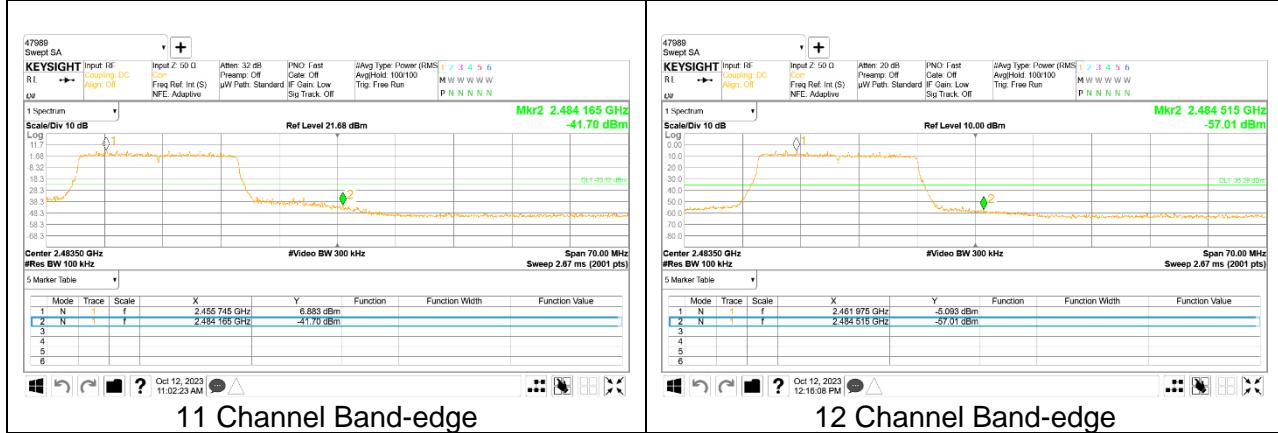

2 Channel Band-edge

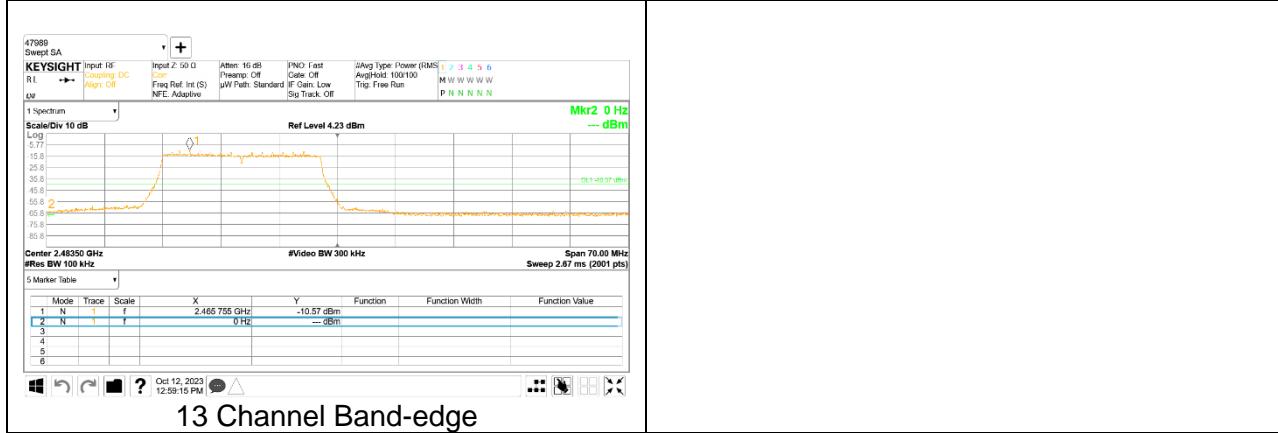

11 Channel Band-edge




12 Channel Band-edge




13 Channel Band-edge

## 2TX Antenna 2

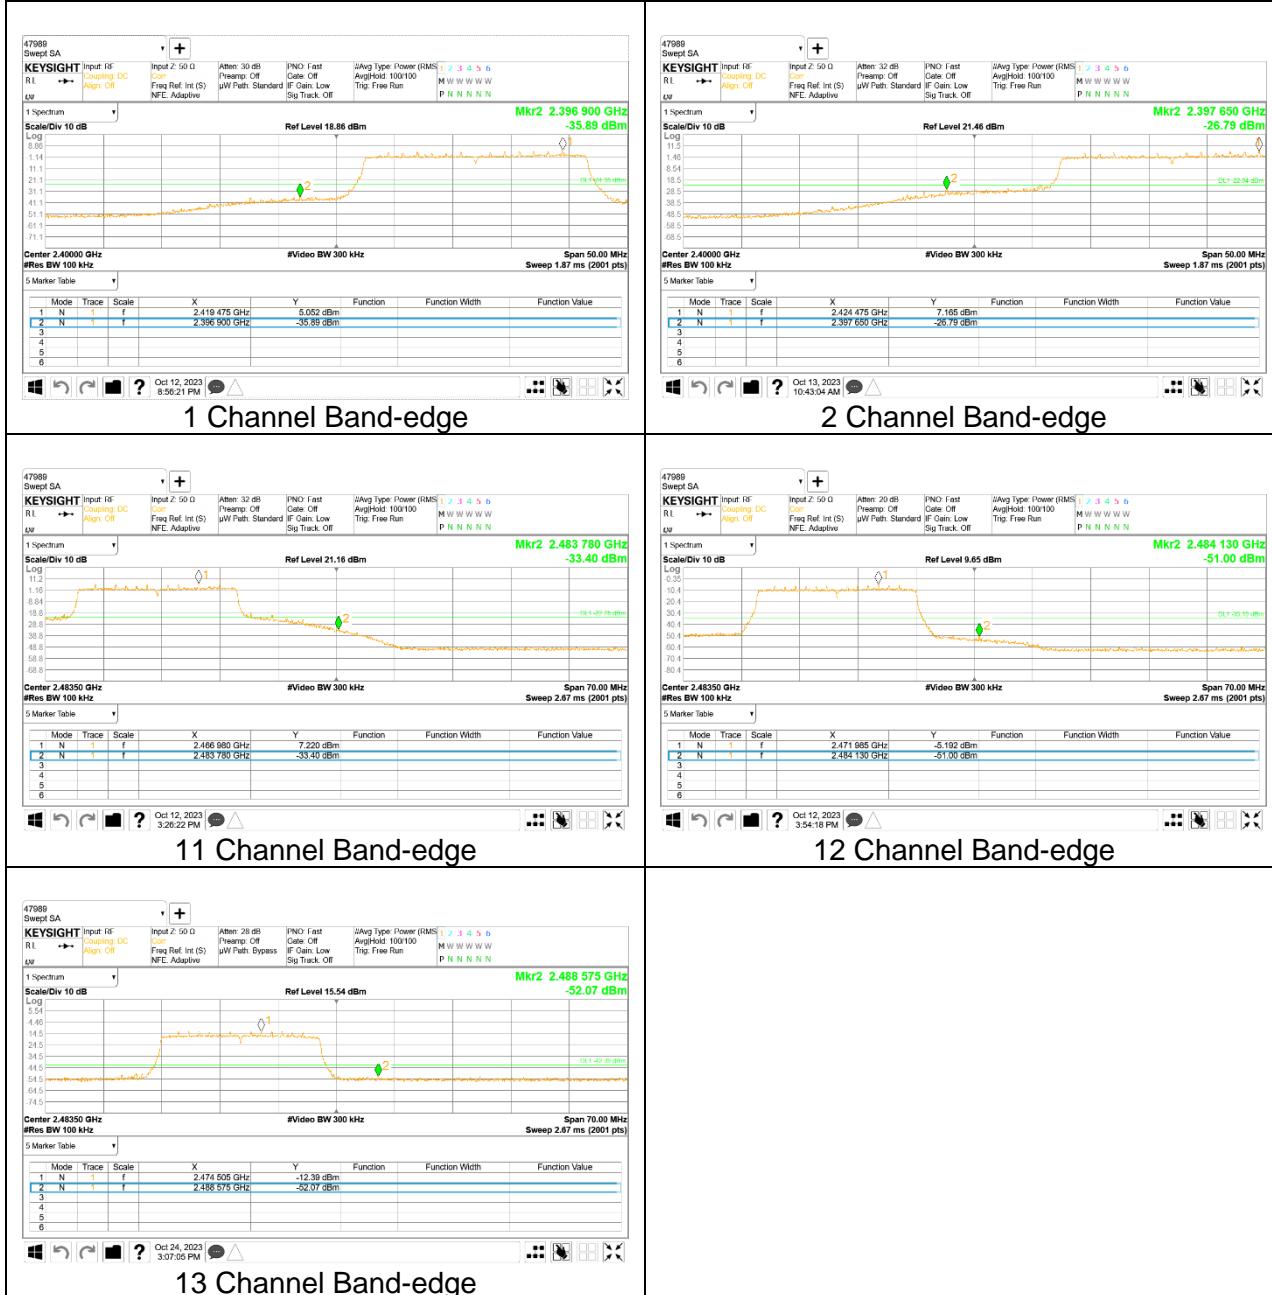


## 9.5.5. 802.11ax HE20(RU) MODE

### 2TX Antenna 1 MODE

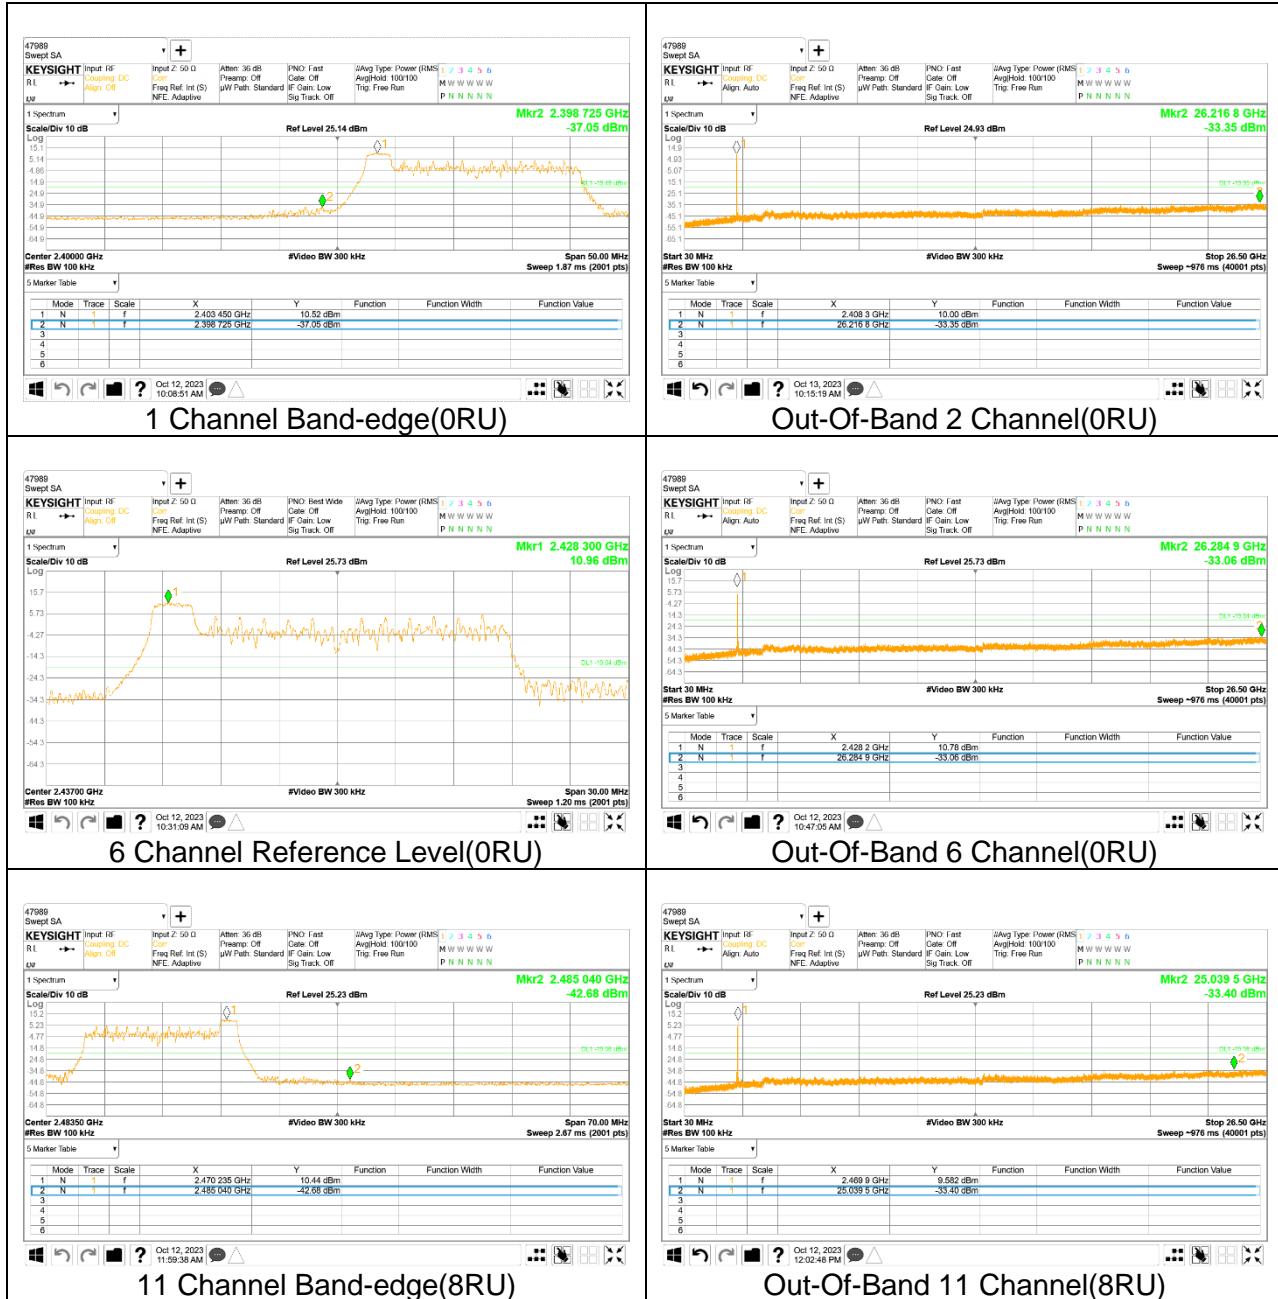

## 2TX Antenna 2 MODE

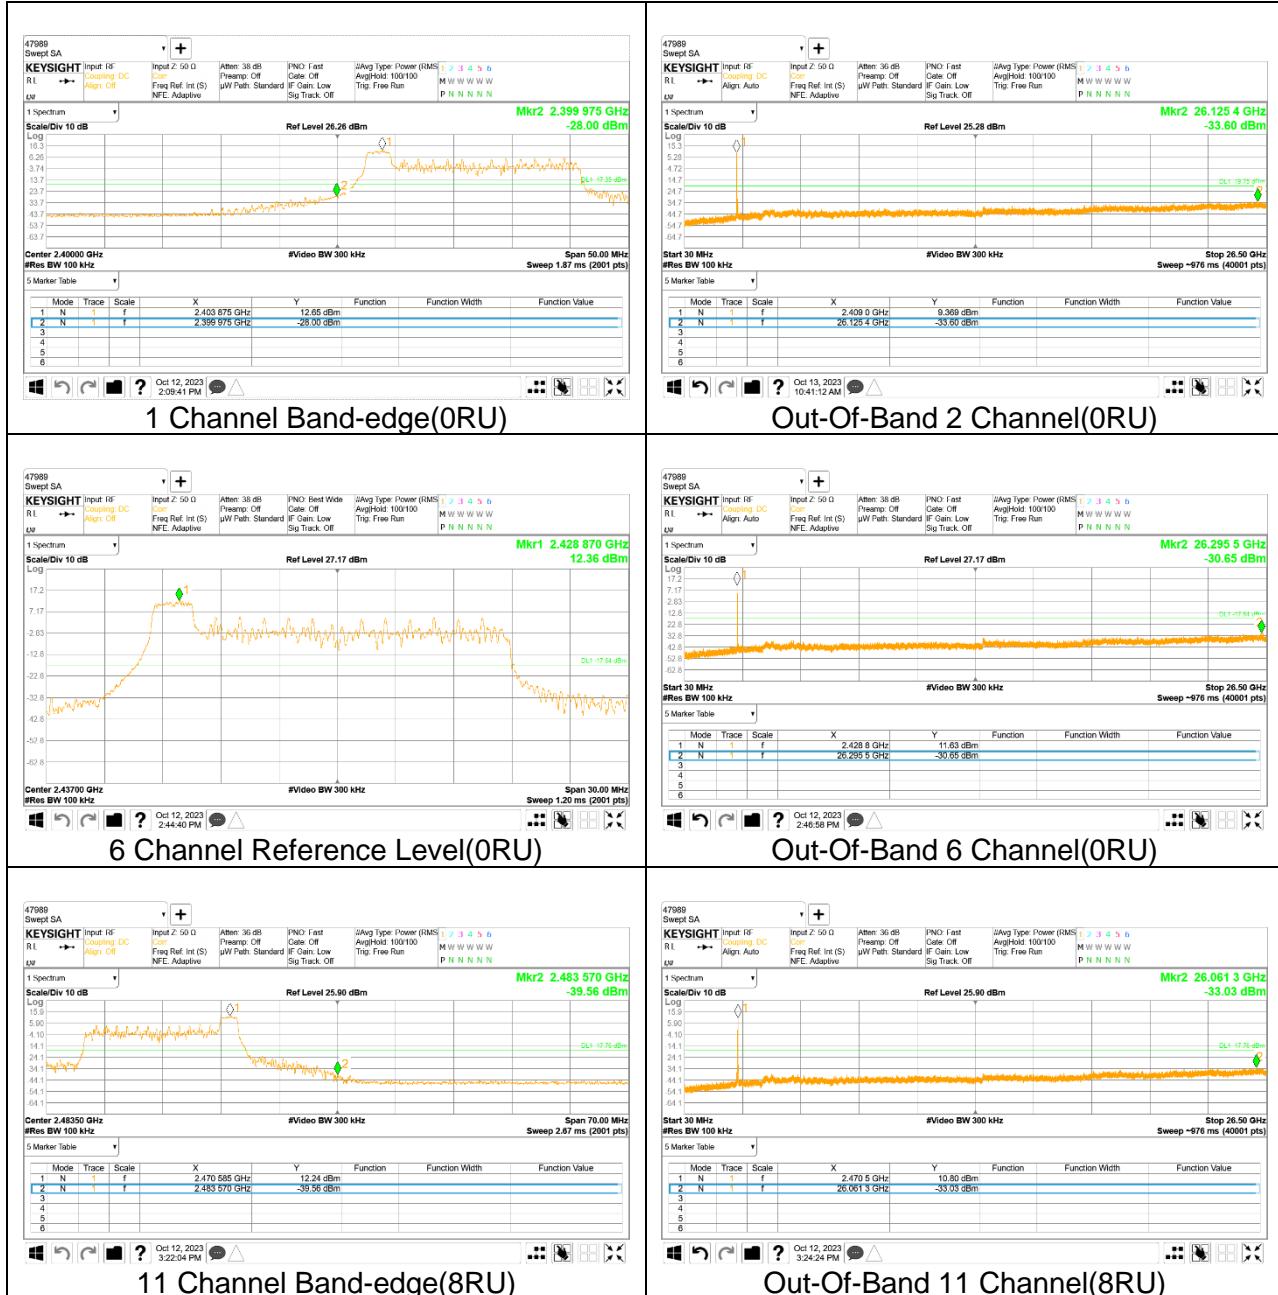

## 10. RADIATED TEST RESULTS

### LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits ( $\mu$ V/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

FCC Part 15.205 (a) : Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	162.0125 ~	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	167.17	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	167.72 ~ 173.2	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	240 ~ 285	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	322 ~ 335.4	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	399.90 ~ 410	3345.8 ~ 3358		
		608 ~ 614	3600 ~ 4400		
		960 ~ 1240			

- FCC Part 15.205(b) : The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

## TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1 GHz and 150 cm for above 1 GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements.

(Restriced bandedge, Final detection of spurious harmonic emissions)

Duty cycle factor =  $10\log(1/x)$  For this sample:

802.11b MIMO mode = 0 dB (duty cycle > 98%);  
802.11g MIMO mode = 0.16 dB (96.32%);  
802.11n(HT20) MIMO mode = 0.09 dB (97.98%);  
802.11ax(HE20) MIMO SU mode = 0 dB (duty cycle > 98%);  
802.11ax(HE20) MIMO 26 Tone mode = 0 dB (duty cycle > 98%).

Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.

The spectrum from 1 GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9 kHz to 30 MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).

Per FCC part 15.31(o), test results were not reported.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.


## 10.1. TRANSMITTER ABOVE 1 GHz

### 10.1.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND

#### 2TX Antenna 1 + Antenna 2

#### BANDEDGE (WORST CASE: 11 CHANNEL)

#### HORIZONTAL RESULT

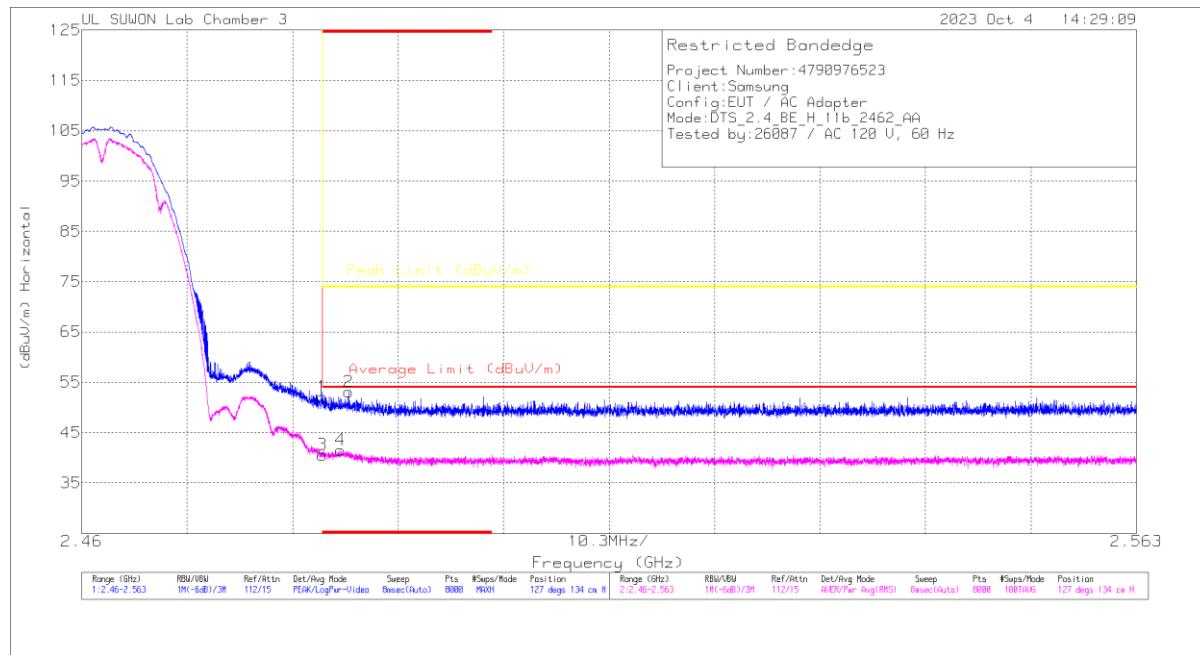

#### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dBm)	Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	-44.58	Pk	32.4	-24.8	0	52.18	-	-	74	-21.82	127	134	H
2	* 2.48608	-45.56	Pk	32.4	-24.8	0	53.16	-	-	74	-20.84	127	134	H
3	* 2.4835	33	RMS	32.4	-24.8	0	40.6	54	-13.4	-	-	127	134	H
4	* 2.48525	33.99	RMS	32.4	-24.8	0	41.59	54	-12.41	-	-	127	134	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

## BANDEDGE TEST DATA


Freq. [MHz]	Antenna	Frequency [GHz]	Reading [dBuV]	Detector Mode	ANT Factor [dB]	Loss [dB]	DC Corr [dB]	Result [dB]	AV Limit [dBuV/m]	AV Margin [dB]	PK Limit [dBuV/m]	PK Margin [dB]	Azimuth [Degs]	Height [cm]	Polarity
2412	MIMO	* 2.39	43.18	Pk	32.10	-24.80	0.00	50.48	-	-	74.00	-23.52	130	101	H
		* 2.38461	45.54	Pk	32.10	-24.90	0.00	52.74	-	-	74.00	-21.26	130	101	H
		* 2.39	33.53	RMS	32.10	-24.80	0.00	40.83	54.00	-13.17	-	-	130	101	H
		* 2.38998	33.96	RMS	32.10	-24.80	0.00	41.26	54.00	-12.74	-	-	130	101	H
		2.39	42.95	Pk	32.10	-24.80	0.00	50.25	-	-	74.00	-23.75	204	343	V
		* 2.38902	44.79	Pk	32.10	-24.80	0.00	52.09	-	-	74.00	-21.91	204	343	V
		* 2.39	32.07	RMS	32.10	-24.80	0.00	39.37	54.00	-14.63	-	-	204	343	V
		* 2.38981	33.42	RMS	32.10	-24.80	0.00	40.72	54.00	-13.28	-	-	204	343	V
2462	MIMO	* 2.4835	44.58	Pk	32.40	-24.80	0.00	52.18	-	-	74.00	-21.82	127	134	H
		* 2.48608	45.56	Pk	32.40	-24.80	0.00	53.16	-	-	74.00	-20.84	127	134	H
		* 2.4835	33.00	RMS	32.40	-24.80	0.00	40.60	54.00	-13.40	-	-	127	134	H
		* 2.48525	33.99	RMS	32.40	-24.80	0.00	41.59	54.00	-12.41	-	-	127	134	H
		* 2.4835	42.77	Pk	32.40	-24.80	0.00	50.37	-	-	74.00	-23.63	129	368	V
		2.515	44.71	Pk	32.40	-24.70	0.00	52.41	-	-	74.00	-21.59	129	368	V
		* 2.4835	32.03	RMS	32.40	-24.80	0.00	39.63	54.00	-14.37	-	-	129	368	V
2467	MIMO	* 2.4835	33.96	RMS	32.40	-24.80	0.00	41.56	54.00	-12.44	-	-	129	368	V
		* 2.4835	42.35	Pk	32.40	-24.80	0.00	49.95	-	-	74.00	-24.05	125	155	H
		2.531	44.82	Pk	32.40	-24.80	0.00	52.42	-	-	74.00	-21.58	125	155	H
		* 2.4835	32.43	RMS	32.40	-24.80	0.00	40.03	54.00	-13.97	-	-	125	155	H
		2.563	33.13	RMS	32.40	-24.80	0.00	40.73	54.00	-13.27	-	-	125	155	H
		* 2.4835	41.73	Pk	32.40	-24.80	0.00	49.33	-	-	74.00	-24.67	205	367	V
		* 2.49612	45.08	Pk	32.40	-24.80	0.00	52.68	-	-	74.00	-21.32	205	367	V
2472	MIMO	* 2.4835	31.33	RMS	32.40	-24.80	0.00	38.93	54.00	-15.07	-	-	205	367	V
		2.561	33.03	RMS	32.40	-24.70	0.00	40.73	54.00	-13.27	-	-	205	367	V
		* 2.4835	42.16	Pk	32.40	-24.80	0.00	49.76	-	-	74.00	-24.24	127	119	H
		* 2.48542	44.51	Pk	32.40	-24.80	0.00	52.11	-	-	74.00	-21.89	127	119	H
		* 2.4835	32.43	RMS	32.40	-24.80	0.00	40.03	54.00	-13.97	-	-	127	119	H
		2.549	33.13	RMS	32.40	-24.70	0.00	40.83	54.00	-13.17	-	-	127	119	H
		* 2.4835	41.40	Pk	32.40	-24.80	0.00	49.00	-	-	74.00	-25.00	205	366	V
		* 2.49645	44.55	Pk	32.40	-24.80	0.00	52.15	-	-	74.00	-21.85	205	366	V
		* 2.4835	32.44	RMS	32.40	-24.80	0.00	40.04	54.00	-13.96	-	-	205	366	V
		* 2.49058	33.24	RMS	32.40	-24.80	0.00	40.84	54.00	-13.16	-	-	205	366	V

Note1. Pk - Peak detector, RMS - RMS detector


Note2. \* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

## HARMONICS AND SPURIOUS EMISSIONS(WORST CASE: 11 CHANNEL)

### CH 11 RESULTS

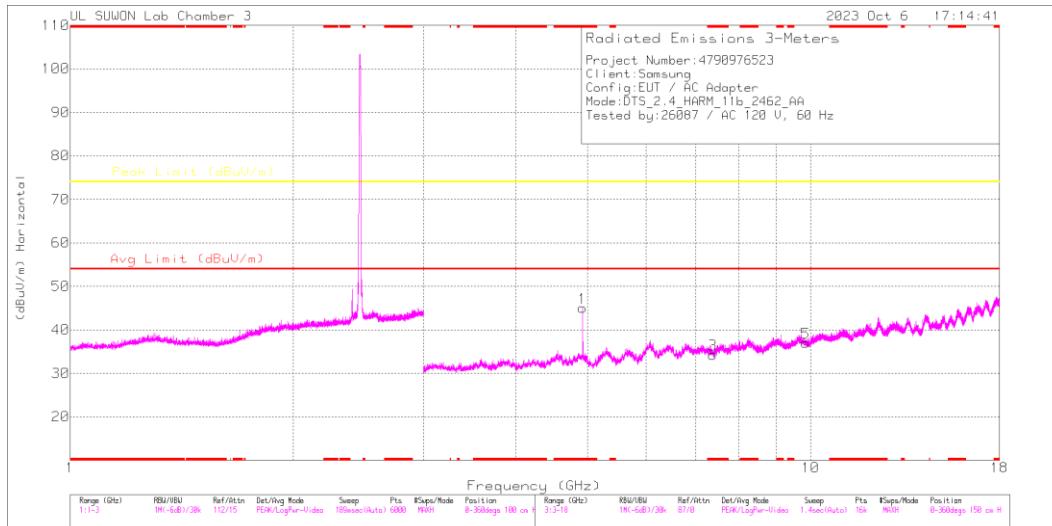

### HORIZONTAL

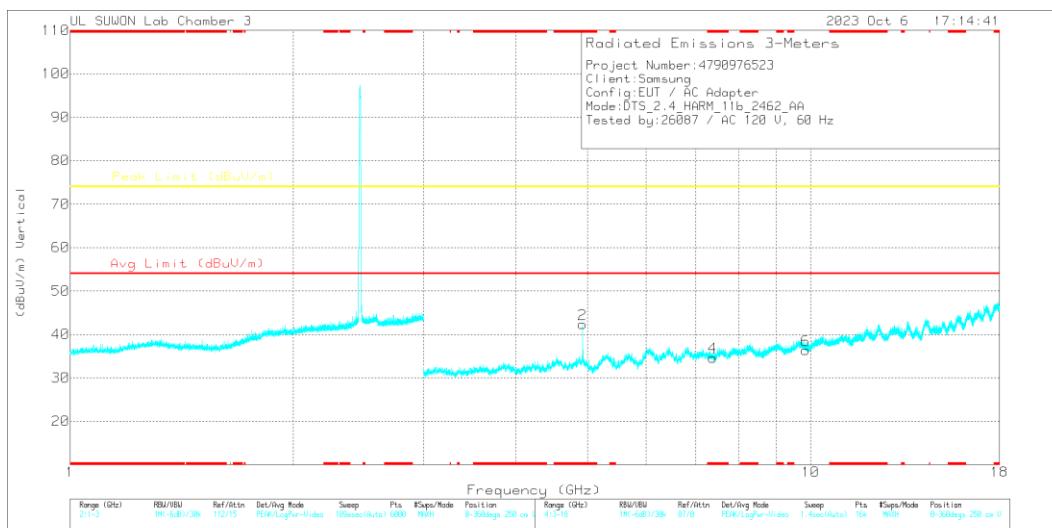

### VERTICAL

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor (dB/m)	Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.92401	45.15	PK2	34.2	-30	0	49.35	-	-	74	-24.65	204	101	H
* 4.92398	40.14	MAv1	34.2	-30	0	44.34	54	-9.66	-	-	204	101	H
* 4.92392	46.56	PK2	34.2	-30	0	50.76	-	-	74	-23.24	171	387	V
* 4.92394	42.53	MAv1	34.2	-30	0	46.73	54	-7.27	-	-	171	387	V
* 7.38541	34.07	PK2	35.7	-25.4	0	44.37	-	-	74	-29.63	0	101	H
* 7.38855	34.91	PK2	35.7	-25.3	0	45.31	-	-	74	-28.69	0	101	V
9.84842	31.55	PK2	37.1	-21.4	0	47.25	-	-	74	-26.75	0	101	H
9.85107	31.29	PK2	37.1	-21.4	0	46.99	-	-	74	-27.01	0	101	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

## HARMONICS AND SPURIOUS EMISSIONS TEST DATA

Freq. [MHz]	Antenna	Frequency [GHz]	Reading [dBuV]	Detector Mode	ANT Factor [dB]	Loss [dB]	DC Corr [dB]	Result [dBuV/m]	AV Limit [dBuV/m]	AV Margin [dB]	PK Limit [dBuV/m]	PK Margin [dB]	Azimuth [Degs]	Height [cm]	Polarity
2412	MIMO	* 4.82399	43.35	PK2	34.30	-30.10	0.00	47.55	-	-	74.00	-26.45	208	110	H
		* 4.82398	37.69	MAv1	34.30	-30.10	0.00	41.89	54.00	-12.11	-	-	208	110	H
		* 4.82398	43.11	PK2	34.30	-30.10	0.00	47.31	-	-	74.00	-26.69	171	382	V
		* 4.824	37.41	MAv1	34.30	-30.10	0.00	41.61	54.00	-12.39	-	-	171	382	V
		7.236	36.42	PK2	35.80	-25.80	0.00	46.42	-	-	74.00	-27.58	0	100	H
		7.237	35.23	PK2	35.80	-25.80	0.00	45.23	-	-	74.00	-28.77	0	100	V
		9.649	32.72	PK2	36.80	-21.80	0.00	47.72	-	-	74.00	-26.28	0	100	H
		9.649	32.28	PK2	36.80	-21.80	0.00	47.28	-	-	74.00	-26.72	0	100	V
2437	MIMO	* 4.87387	43.55	PK2	34.20	-29.80	0.00	47.95	-	-	74.00	-26.05	205	103	H
		* 4.87398	37.32	MAv1	34.20	-29.80	0.00	41.72	54.00	-12.28	-	-	205	103	H
		* 4.87385	44.38	PK2	34.20	-29.80	0.00	48.78	-	-	74.00	-25.22	170	397	V
		* 4.87395	38.65	MAv1	34.20	-29.80	0.00	43.05	54.00	-10.95	-	-	170	397	V
		* 7.31176	35.12	PK2	35.80	-25.50	0.00	45.42	-	-	74.00	-28.58	0	100	H
		* 7.31164	34.97	PK2	35.80	-25.50	0.00	45.27	-	-	74.00	-28.73	0	100	V
		9.749	31.93	PK2	36.90	-21.50	0.00	47.33	-	-	74.00	-26.67	0	100	H
		9.749	32.35	PK2	36.90	-21.60	0.00	47.65	-	-	74.00	-26.35	0	100	V
2462	MIMO	* 4.92401	45.15	PK2	34.20	-30.00	0.00	49.35	-	-	74.00	-24.65	204	101	H
		* 4.92398	40.14	MAv1	34.20	-30.00	0.00	44.34	54.00	-9.66	-	-	204	101	H
		* 4.92392	46.56	PK2	34.20	-30.00	0.00	50.76	-	-	74.00	-23.24	171	387	V
		* 4.92394	42.53	MAv1	34.20	-30.00	0.00	46.73	54.00	-7.27	-	-	171	387	V
		* 7.38541	34.07	PK2	35.70	-25.40	0.00	44.37	-	-	74.00	-29.63	0	101	H
		* 7.38855	34.91	PK2	35.70	-25.30	0.00	45.31	-	-	74.00	-28.69	0	101	V
		9.848	31.55	PK2	37.10	-21.40	0.00	47.25	-	-	74.00	-26.75	0	101	H
		9.851	31.29	PK2	37.10	-21.40	0.00	46.99	-	-	74.00	-27.01	0	101	V

Note1. PK2 - KDB558074 Method: Maximum Peak / MAv1 - KDB558074 Option 1 Maximum RMS Average


Note2. \* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

## 10.1.2. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND

### 2TX Antenna 1 + Antenna 2

### BANDEDGE (WORST CASE: 11 CHANNEL)

### VERTICAL RESULT

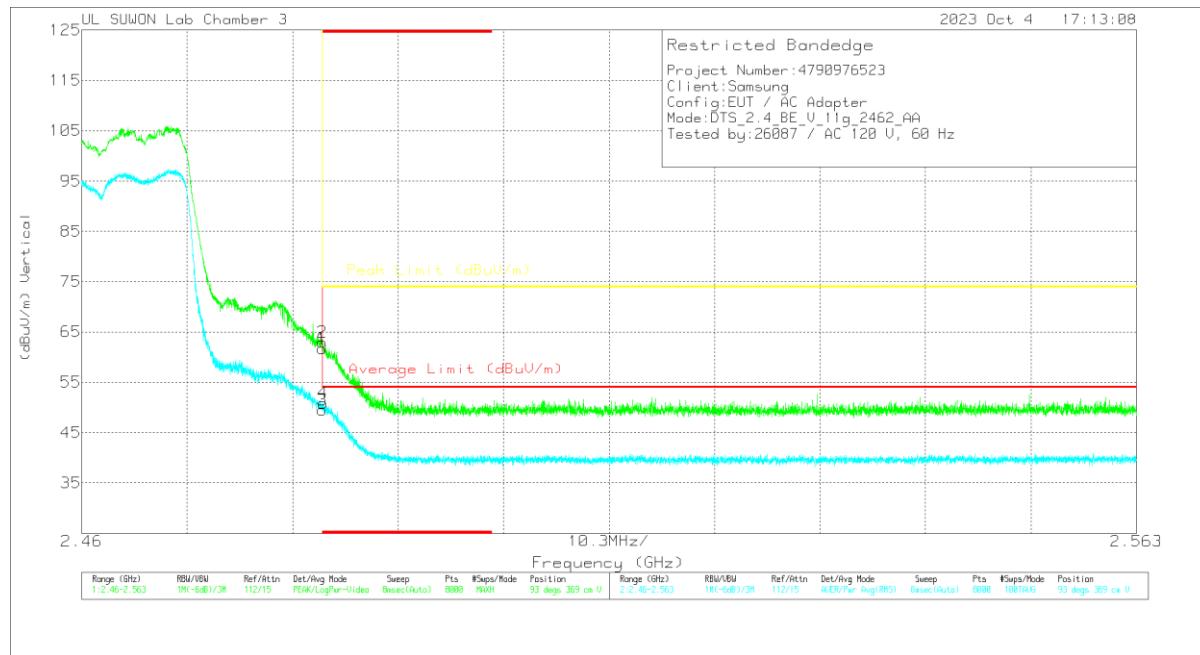

### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dB)	Det	Antenna Correction Factor(dB/m)	Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Deg)	Height (cm)	Polarity
1	* 2.4835	54.08	Pk	32.4	-24.8	0	61.68	-	-	74	-12.32	93	369	V
2	* 2.48351	55.41	Pk	32.4	-24.8	0	63.01	-	-	74	-10.99	93	369	V
3	* 2.4835	41.8	RMS	32.4	-24.8	.16	49.56	54	-4.44	-	-	93	369	V
4	* 2.48358	43.08	RMS	32.4	-24.8	.16	50.84	54	-3.16	-	-	93	369	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

## BANDEDGE TEST DATA


Freq. [MHz]	Antenna	Frequency [GHz]	Reading [dBuV]	Detector Mode	ANT Factor [dB]	Loss [dB]	DC Corr [dB]	Result [dB]	AV Limit [dBuV/m]	AV Margin [dB]	PK Limit [dBuV/m]	PK Margin [dB]	Azimuth [Degs]	Height [cm]	Polarity
2412	MIMO	* 2.39	55.89	Pk	32.10	-24.80	0.00	63.19	-	-	74.00	-10.81	126	124	H
		* 2.38972	56.15	Pk	32.10	-24.80	0.00	63.45	-	-	74.00	-10.55	126	124	H
		* 2.39	42.43	RMS	32.10	-24.80	0.16	49.89	54.00	-4.11	-	-	126	124	H
		* 2.38997	42.49	RMS	32.10	-24.80	0.16	49.95	54.00	-4.05	-	-	126	124	H
		2.39	49.80	Pk	32.10	-24.80	0.00	57.10	-	-	74.00	-16.90	202	394	V
		* 2.38985	50.49	Pk	32.10	-24.80	0.00	57.79	-	-	74.00	-16.21	202	394	V
		* 2.39	36.05	RMS	32.10	-24.80	0.16	43.51	54.00	-10.49	-	-	202	394	V
		* 2.38976	37.56	RMS	32.10	-24.80	0.16	45.02	54.00	-8.98	-	-	202	394	V
2417	MIMO	* 2.39	45.02	Pk	32.10	-24.80	0.00	52.32	-	-	74.00	-21.68	202	341	V
		* 2.38847	48.21	Pk	32.10	-24.80	0.00	55.51	-	-	74.00	-18.49	202	341	V
		* 2.39	33.03	RMS	32.10	-24.80	0.16	40.49	54.00	-13.51	-	-	202	341	V
		* 2.38876	35.03	RMS	32.10	-24.80	0.16	42.49	54.00	-11.51	-	-	202	341	V
		* 2.39	45.02	Pk	32.10	-24.80	0.00	52.32	-	-	74.00	-21.68	202	341	V
		* 2.38847	48.21	Pk	32.10	-24.80	0.00	55.51	-	-	74.00	-18.49	202	341	V
		* 2.39	33.03	RMS	32.10	-24.80	0.16	40.49	54.00	-13.51	-	-	202	341	V
2462	MIMO	* 2.4835	54.48	Pk	32.40	-24.80	0.00	62.08	-	-	74.00	-11.92	128	119	H
		* 2.48363	55.62	Pk	32.40	-24.80	0.00	63.22	-	-	74.00	-10.78	128	119	H
		* 2.4835	42.19	RMS	32.40	-24.80	0.16	49.95	54.00	-4.05	-	-	128	119	H
		* 2.4836	42.65	RMS	32.40	-24.80	0.16	50.41	54.00	-3.59	-	-	128	119	H
		* 2.4835	54.08	Pk	32.40	-24.80	0.00	61.68	-	-	74.00	-12.32	93	369	V
		* 2.48351	55.41	Pk	32.40	-24.80	0.00	63.01	-	-	74.00	-10.99	93	369	V
		* 2.4835	41.80	RMS	32.40	-24.80	0.16	49.56	54.00	-4.44	-	-	93	369	V
2467	MIMO	* 2.48358	43.08	RMS	32.40	-24.80	0.16	50.84	54.00	-3.16	-	-	93	369	V
		* 2.4835	42.91	Pk	32.40	-24.80	0.00	50.51	-	-	74.00	-23.49	126	158	H
		2.559	44.78	Pk	32.40	-24.70	0.00	52.48	-	-	74.00	-21.52	126	158	H
		* 2.4835	31.91	RMS	32.40	-24.80	0.16	39.67	54.00	-14.33	-	-	126	158	H
		2.561	33.20	RMS	32.40	-24.70	0.16	41.06	54.00	-12.94	-	-	126	158	H
		* 2.4835	41.72	Pk	32.40	-24.80	0.00	49.32	-	-	74.00	-24.68	179	285	V
		2.554	44.52	Pk	32.40	-24.60	0.00	52.32	-	-	74.00	-21.68	179	285	V
2472	MIMO	* 2.4835	32.25	RMS	32.40	-24.80	0.16	40.01	54.00	-13.99	-	-	179	285	V
		2.543	33.41	RMS	32.40	-24.70	0.16	41.27	54.00	-12.73	-	-	179	285	V
		* 2.4835	43.69	Pk	32.40	-24.80	0.00	51.29	-	-	74.00	-22.71	128	116	H
		* 2.48354	45.06	Pk	32.40	-24.80	0.00	52.66	-	-	74.00	-21.34	128	116	H
		* 2.4835	31.95	RMS	32.40	-24.80	0.16	39.71	54.00	-14.29	-	-	128	116	H
		* 2.48371	33.23	RMS	32.40	-24.80	0.16	40.99	54.00	-13.01	-	-	128	116	H
		* 2.4835	42.56	Pk	32.40	-24.80	0.00	50.16	-	-	74.00	-23.84	179	285	V

Note1. Pk - Peak detector, RMS - RMS detector


Note2. \* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

## HARMONICS AND SPURIOUS EMISSIONS (WORST CASE: 6 CHANNEL)

### CH 6 RESULTS

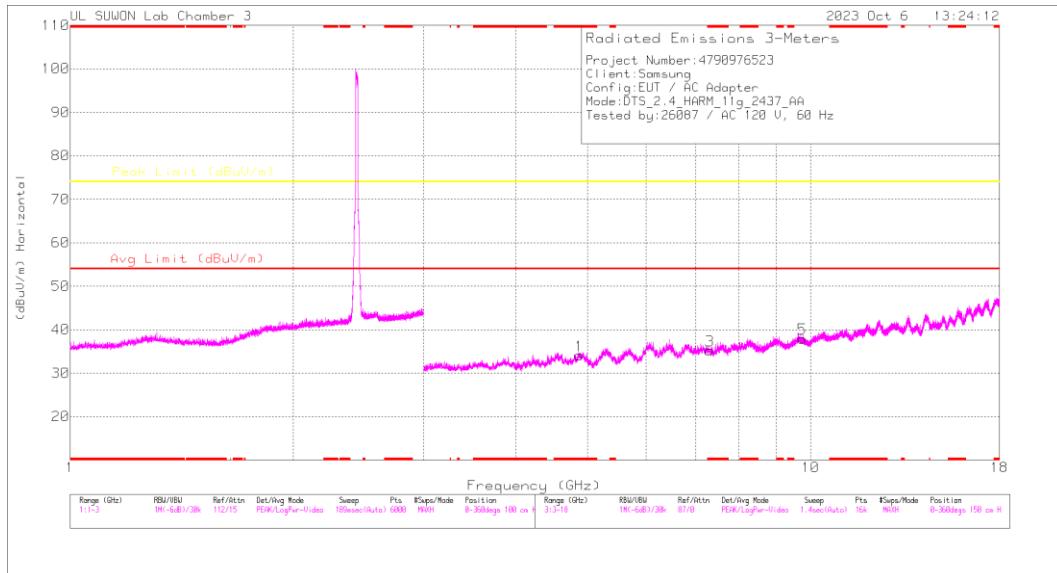

### HORIZONTAL

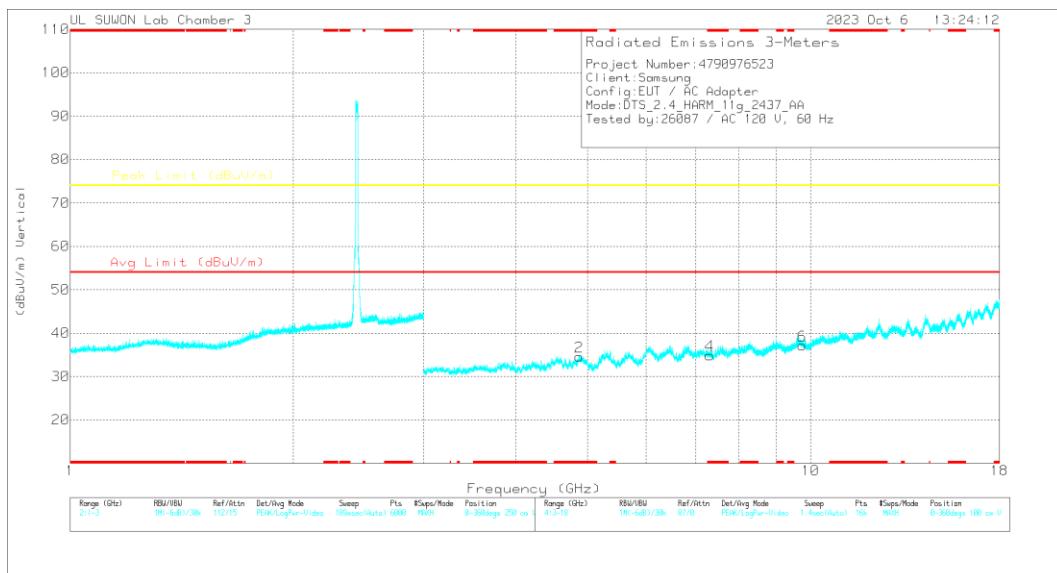

### VERTICAL

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.87411	40.41	PK2	34.2	-29.8	0	44.81	-	-	74	-29.19	0	100	H
* 4.8741	40.5	PK2	34.2	-29.8	0	44.9	-	-	74	-29.1	0	100	V
* 7.31203	35.31	PK2	35.8	-25.5	0	45.61	-	-	74	-28.39	0	100	H
* 7.31194	36.11	PK2	35.8	-25.5	0	46.41	-	-	74	-27.59	0	100	V
9.74836	32.68	PK2	36.9	-21.6	0	47.98	-	-	74	-26.02	0	100	H
9.74858	32.48	PK2	36.9	-21.6	0	47.78	-	-	74	-26.22	0	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

## HARMONICS AND SPURIOUS EMISSIONS TEST DATA

Freq. [MHz]	Antenna	Frequency [GHz]	Reading [dBuV]	Detector Mode	ANT Factor [dB]	Loss [dB]	DC Corr [dB]	Result [dBuV/m]	AV Limit [dBuV/m]	AV Margin [dB]	PK Limit [dBuV/m]	PK Margin [dB]	Azimuth [Degs]	Height [cm]	Polarity
2417	MIMO	* 4.83461	39.41	PK2	34.20	-30.00	0.00	43.61	-	-	74.00	-30.39	0	100	H
		* 4.83476	40.31	PK2	34.20	-30.00	0.00	44.51	-	-	74.00	-29.49	0	100	V
		* 7.25194	35.53	PK2	35.80	-25.70	0.00	45.63	-	-	74.00	-28.37	0	100	H
		* 7.25175	35.44	PK2	35.80	-25.70	0.00	45.54	-	-	74.00	-28.46	0	100	V
		9.669	32.60	PK2	36.80	-21.70	0.00	47.70	-	-	74.00	-26.30	0	100	H
		9.669	32.47	PK2	36.80	-21.70	0.00	47.57	-	-	74.00	-26.43	0	100	V
2437	MIMO	* 4.87411	40.41	PK2	34.20	-29.80	0.00	44.81	-	-	74.00	-29.19	0	100	H
		* 4.8741	40.50	PK2	34.20	-29.80	0.00	44.90	-	-	74.00	-29.10	0	100	V
		* 7.31203	35.31	PK2	35.80	-25.50	0.00	45.61	-	-	74.00	-28.39	0	100	H
		* 7.31194	36.11	PK2	35.80	-25.50	0.00	46.41	-	-	74.00	-27.59	0	100	V
		9.748	32.68	PK2	36.90	-21.60	0.00	47.98	-	-	74.00	-26.02	0	100	H
		9.749	32.48	PK2	36.90	-21.60	0.00	47.78	-	-	74.00	-26.22	0	100	V
2462	MIMO	* 4.92465	40.92	PK2	34.20	-30.00	0.00	45.12	-	-	74.00	-28.88	0	100	H
		* 4.92476	40.40	PK2	34.20	-30.00	0.00	44.60	-	-	74.00	-29.40	0	100	V
		* 7.38676	34.51	PK2	35.70	-25.30	0.00	44.91	-	-	74.00	-29.09	0	100	H
		* 7.3866	34.53	PK2	35.70	-25.40	0.00	44.83	-	-	74.00	-29.17	0	100	V
		9.849	32.20	PK2	37.10	-21.40	0.00	47.90	-	-	74.00	-26.10	0	100	H
		9.849	31.66	PK2	37.10	-21.40	0.00	47.36	-	-	74.00	-26.64	0	100	V

Note1. PK2 - KDB558074 Method: Maximum Peak / MAv1 - KDB558074 Option 1 Maximum RMS Average


Note2. \* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

### 10.1.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND

#### 2TX Antenna 1 + Antenna 2

#### BANDEDGE (WORST CASE: 1 CHANNEL)

#### HORIZONTAL RESULT

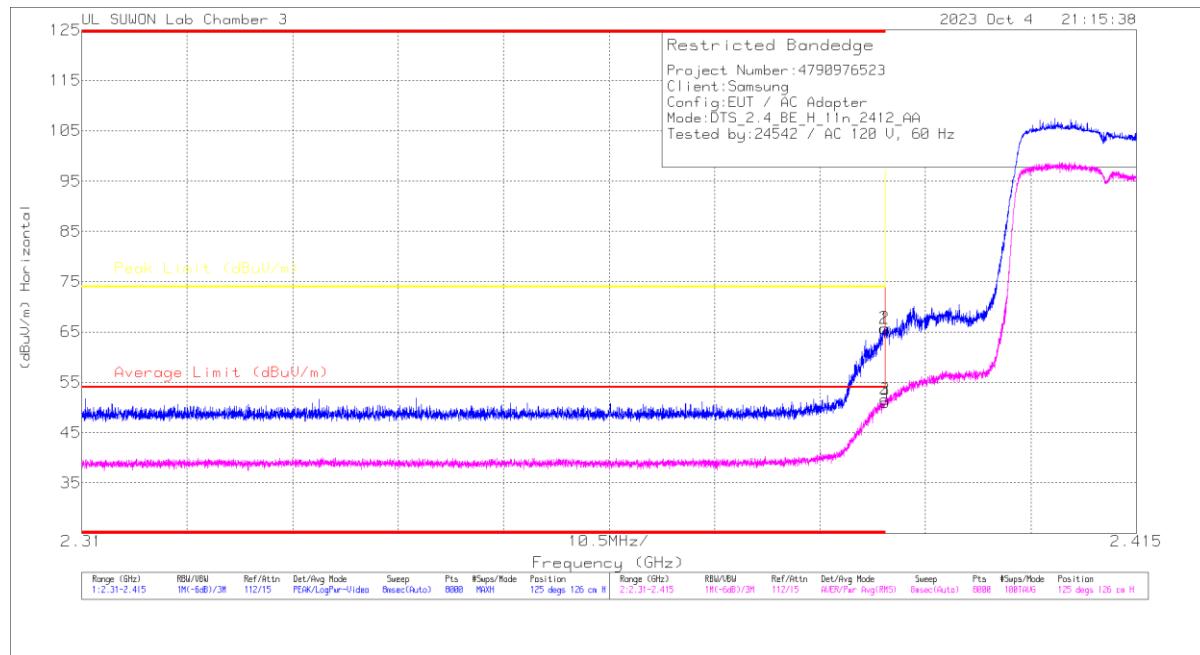

#### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dBi)	Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	58.42	Pk	32.1	-24.8	0	65.72	-	-	74	-8.28	125	126	H
2	* 2.3899	58.47	Pk	32.1	-24.8	0	65.77	-	-	74	-8.23	125	126	H
3	* 2.39	44.26	RMS	32.1	-24.8	.09	51.65	54	-2.35	-	-	125	126	H
4	* 2.38996	43.67	RMS	32.1	-24.8	.09	51.06	54	-2.94	-	-	125	126	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

## BANDEDGE TEST DATA


Freq. [MHz]	Antenna	Frequency [GHz]	Reading [dBuV]	Detector Mode	ANT Factor [dB]	Loss [dB]	DC Corr [dB]	Result [dBuV/m]	AV Limit [dBuV/m]	AV Margin [dB]	PK Limit [dBuV/m]	PK Margin [dB]	Azimuth [Degs]	Height [cm]	Polarity
2412	MIMO	* 2.39	58.42	Pk	32.10	-24.80	0.00	65.72	-	-	74.00	-8.28	125	126	H
		* 2.3899	58.47	Pk	32.10	-24.80	0.00	65.77	-	-	74.00	-8.23	125	126	H
		* 2.39	44.26	RMS	32.10	-24.80	0.09	51.65	54.00	-2.35	-	-	125	126	H
		* 2.3896	43.67	RMS	32.10	-24.80	0.09	51.06	54.00	-2.94	-	-	125	126	H
		* 2.39	48.32	Pk	32.10	-24.80	0.00	55.62	-	-	74.00	-18.38	199	393	V
		* 2.38997	51.06	Pk	32.10	-24.80	0.00	58.36	-	-	74.00	-15.64	199	393	V
		* 2.39	37.22	RMS	32.10	-24.80	0.09	44.61	54.00	-9.39	-	-	199	393	V
		* 2.38964	37.75	RMS	32.10	-24.80	0.09	45.14	54.00	-8.86	-	-	199	393	V
2417	MIMO	* 2.39	49.71	Pk	32.10	-24.80	0.00	57.01	-	-	74.00	-16.99	127	122	H
		* 2.38878	50.24	Pk	32.10	-24.80	0.00	57.54	-	-	74.00	-16.46	127	122	H
		* 2.39	35.59	RMS	32.10	-24.80	0.09	42.98	54.00	-11.02	-	-	127	122	H
		* 2.38998	37.01	RMS	32.10	-24.80	0.09	44.40	54.00	-9.60	-	-	127	122	H
		* 2.39	45.54	Pk	32.10	-24.80	0.00	52.84	-	-	74.00	-21.16	202	395	V
		* 2.3887	47.85	Pk	32.10	-24.80	0.00	55.15	-	-	74.00	-18.85	202	395	V
		* 2.39	33.82	RMS	32.10	-24.80	0.09	41.21	54.00	-12.79	-	-	202	395	V
2462	MIMO	* 2.4835	53.71	Pk	32.40	-24.80	0.00	61.31	-	-	74.00	-12.69	155	326	H
		* 2.4844	56.52	Pk	32.40	-24.80	0.00	64.12	-	-	74.00	-9.88	155	326	H
		* 2.4835	40.96	RMS	32.40	-24.80	0.09	48.65	54.00	-5.35	-	-	155	326	H
		* 2.48375	42.87	RMS	32.40	-24.80	0.09	50.56	54.00	-3.44	-	-	155	326	H
		* 2.4835	55.23	Pk	32.40	-24.80	0.00	62.83	-	-	74.00	-11.17	88	371	V
		* 2.48385	56.89	Pk	32.40	-24.80	0.00	64.49	-	-	74.00	-9.51	88	371	V
		* 2.4835	42.90	RMS	32.40	-24.80	0.09	50.59	54.00	-3.41	-	-	88	371	V
2467	MIMO	* 2.48351	43.80	RMS	32.40	-24.80	0.09	51.49	54.00	-2.51	-	-	88	371	V
		* 2.4835	41.87	Pk	32.40	-24.80	0.00	49.47	-	-	74.00	-24.53	158	326	H
		* 2.521	44.64	Pk	32.40	-24.80	0.00	52.24	-	-	74.00	-21.76	158	326	H
		* 2.4835	31.91	RMS	32.40	-24.80	0.09	39.60	54.00	-14.40	-	-	158	326	H
		* 2.545	33.11	RMS	32.40	-24.60	0.09	41.00	54.00	-13.00	-	-	158	326	H
		* 2.4835	41.64	Pk	32.40	-24.80	0.00	49.24	-	-	74.00	-24.76	198	284	V
		* 2.514	44.59	Pk	32.40	-24.60	0.00	52.39	-	-	74.00	-21.61	198	284	V
2472	MIMO	* 2.4835	31.94	RMS	32.40	-24.80	0.09	39.63	54.00	-14.37	-	-	198	284	V
		* 2.561	33.06	RMS	32.40	-24.70	0.09	40.85	54.00	-13.15	-	-	198	284	V
		* 2.4835	44.83	Pk	32.40	-24.80	0.00	52.43	-	-	74.00	-21.57	157	326	H
		* 2.48351	46.65	Pk	32.40	-24.80	0.00	54.25	-	-	74.00	-19.75	157	326	H
		* 2.4835	33.56	RMS	32.40	-24.80	0.09	41.25	54.00	-12.75	-	-	157	326	H
		* 2.48353	33.89	RMS	32.40	-24.80	0.09	41.58	54.00	-12.42	-	-	157	326	H
		* 2.4835	43.74	Pk	32.40	-24.80	0.00	51.34	-	-	74.00	-22.66	201	285	V
		* 2.558	44.53	Pk	32.40	-24.70	0.00	52.23	-	-	74.00	-21.77	201	285	V
		* 2.4835	31.52	RMS	32.40	-24.80	0.09	39.21	54.00	-14.79	-	-	201	285	V
		* 2.4929	33.28	RMS	32.40	-24.80	0.09	40.97	54.00	-13.03	-	-	201	285	V

Note1. Pk - Peak detector, RMS - RMS detector


Note2. \* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

## HARMONICS AND SPURIOUS EMISSIONS (WORST CASE: 6 CHANNEL)

### CH 6 RESULTS

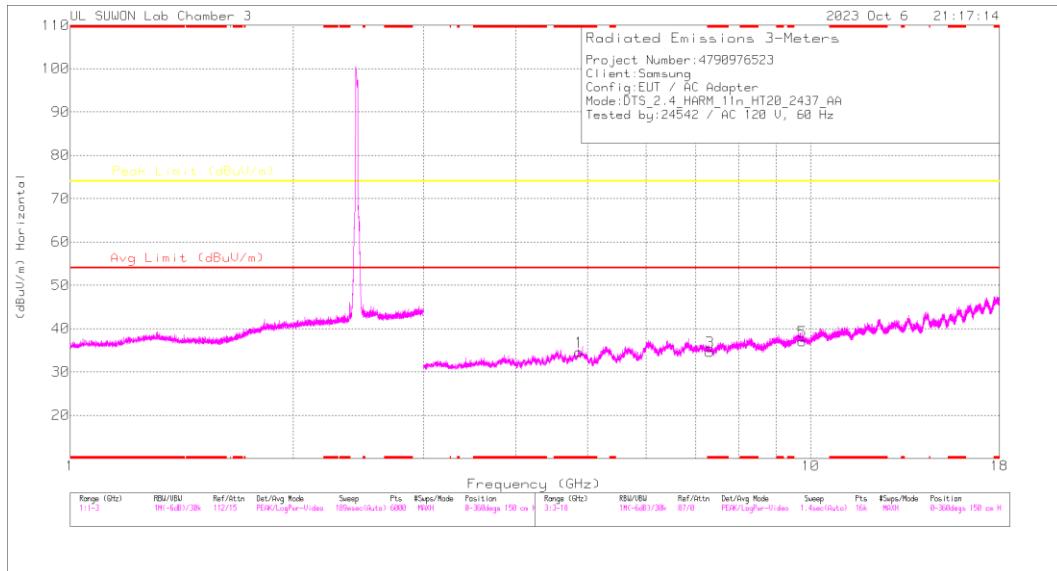

### HORIZONTAL

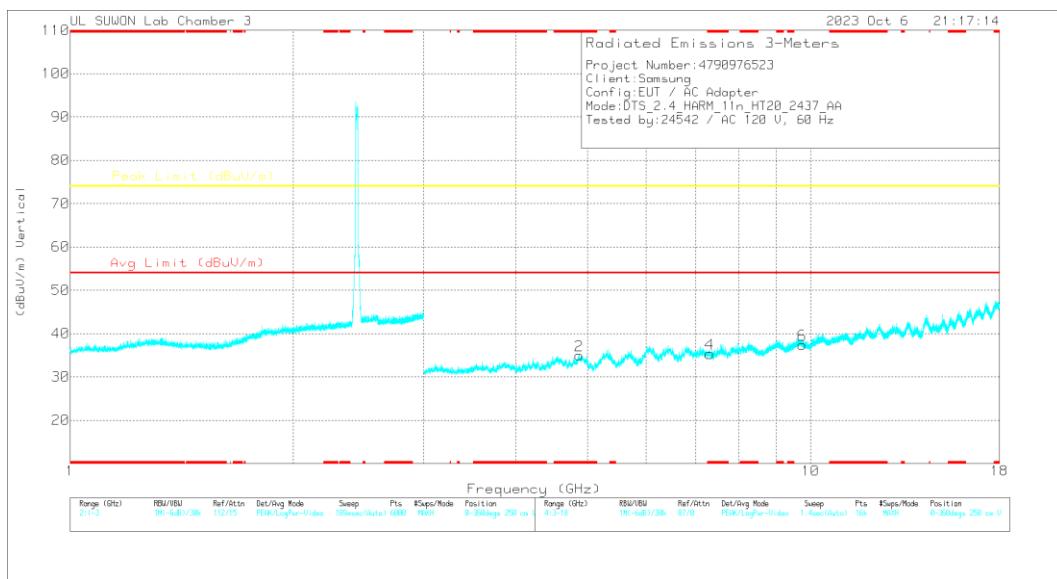

### VERTICAL

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.87101	40.26	PK2	34.2	-29.9	0	44.56	-	-	74	-29.44	0	100	H
* 4.8706	39.99	PK2	34.2	-29.9	0	44.29	-	-	74	-29.71	0	100	V
* 7.31312	35.29	PK2	35.8	-25.5	0	45.59	-	-	74	-28.41	0	100	H
* 7.30851	35.17	PK2	35.8	-25.5	0	45.47	-	-	74	-28.53	0	100	V
9.74754	32.23	PK2	36.9	-21.6	0	47.53	-	-	74	-26.47	0	100	H
9.74814	32.37	PK2	36.9	-21.6	0	47.67	-	-	74	-26.33	0	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

## HARMONICS AND SPURIOUS EMISSIONS TEST DATA

Freq. [MHz]	Antenna	Frequency [GHz]	Reading [dBuV]	Detector Mode	ANT Factor [dB]	Loss [dB]	DC Corr [dB]	Result [dBuV/m]	AV Limit [dBuV/m]	AV Margin [dB]	PK Limit [dBuV/m]	PK Margin [dB]	Azimuth [Degs]	Height [cm]	Polarity
2417	MIMO	* 4.83978	39.99	PK2	34.20	-30.00	0.00	44.19	-	-	74.00	-29.81	0	100	H
		* 4.83777	39.90	PK2	34.20	-30.10	0.00	44.00	-	-	74.00	-30.00	0	100	V
		* 7.2513	35.46	PK2	35.80	-25.70	0.00	45.56	-	-	74.00	-28.44	0	100	H
		* 7.2524	36.02	PK2	35.80	-25.70	0.00	46.12	-	-	74.00	-27.88	0	100	V
		9.666	32.56	PK2	36.80	-21.70	0.00	47.66	-	-	74.00	-26.34	0	100	H
		9.668	32.45	PK2	36.80	-21.60	0.00	47.65	-	-	74.00	-26.35	0	100	V
2437	MIMO	* 4.87101	40.26	PK2	34.20	-29.90	0.00	44.56	-	-	74.00	-29.44	0	100	H
		* 4.8706	39.99	PK2	34.20	-29.90	0.00	44.29	-	-	74.00	-29.71	0	100	V
		* 7.31312	35.29	PK2	35.80	-25.50	0.00	45.59	-	-	74.00	-28.41	0	100	H
		* 7.30851	35.17	PK2	35.80	-25.50	0.00	45.47	-	-	74.00	-28.53	0	100	V
		9.748	32.23	PK2	36.90	-21.60	0.00	47.53	-	-	74.00	-26.47	0	100	H
		9.748	32.37	PK2	36.90	-21.60	0.00	47.67	-	-	74.00	<b>-26.33</b>	0	100	V
2457	MIMO	* 4.92576	41.12	PK2	34.30	-30.00	0.00	45.42	-	-	74.00	-28.58	0	100	H
		* 4.92216	40.73	PK2	34.20	-29.90	0.00	45.03	-	-	74.00	-28.97	0	100	V
		7.387	34.61	PK2	35.70	-25.30	0.00	45.01	-	-	74.00	-28.99	0	100	H
		* 7.38307	34.61	PK2	35.70	-25.40	0.00	44.91	-	-	74.00	-29.09	0	100	V
		9.846	31.62	PK2	37.10	-21.40	0.00	47.32	-	-	74.00	-26.68	0	100	H
		9.847	31.62	PK2	37.10	-21.40	0.00	47.32	-	-	74.00	-26.68	0	100	V

Note1. PK2 - KDB558074 Method: Maximum Peak / MAv1 - KDB558074 Option 1 Maximum RMS Average


Note2. \* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

## 10.1.4. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 2.4 GHz BAND

### 2TX Antenna 1 + Antenna 2

#### BANDEDGE (11 CHANNEL, SU)

#### HORIZONTAL RESULT

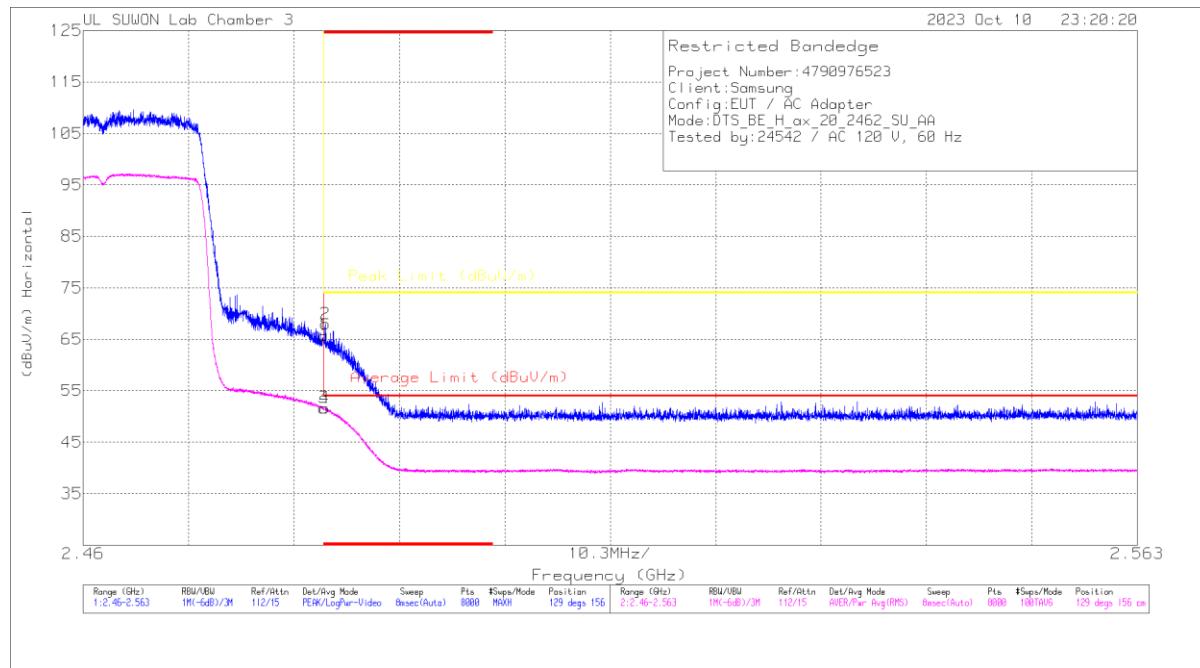

#### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Antenna Correction Factor(dBm)	Loss(dB)	DC Corr (dB)	Corrected Reading (dBm/m)	Average Limit (dBm/m)	Margin (dB)	Peak Limit (dBm/m)	PK Margin (dB)	Azimuth (Deg)	Height (cm)	Polarity
1	* 2.4835	58.14	Pk	32.4	-24.8	0	65.74	-	-	74	-8.26	129	156	H
2	* 2.4836	60.39	Pk	32.4	-24.8	0	67.99	-	-	74	-6.01	129	156	H
3	* 2.4835	44.08	RMS	32.4	-24.8	0	51.68	54	-2.32	-	-	129	156	H
4	* 2.4836	44.06	RMS	32.4	-24.8	0	51.66	54	-2.34	-	-	129	156	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection