


BANDEDGE (802.11ac VHT160 / 5570 MHz LOWER)

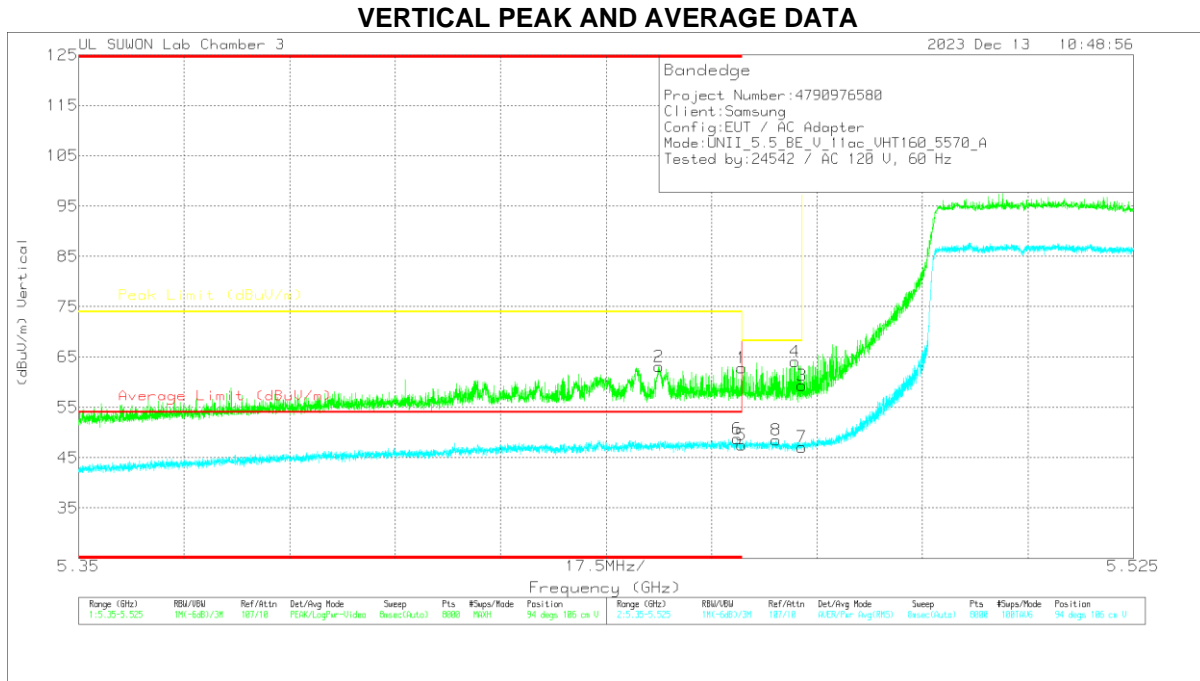


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dBm)	Path loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	48.09	Pk	34.9	-20.1	0	62.89	-	-	74	-11.11	94	106	V
2	* 5.44624	48.32	Pk	34.9	-20.1	0	63.12	-	-	74	-10.88	94	106	V
3	5.46998	44.62	Pk	34.9	-20.2	0	59.32	-	-	68.2	-8.88	94	106	V
4	5.46884	49.4	Pk	34.9	-20.2	0	64.1	-	-	68.2	-4.1	94	106	V
5	* 5.45998	32.49	RMS	34.9	-20.1	24	47.53	54	-6.47	-	-	94	106	V
6	* 5.45926	33.77	RMS	34.9	-20.1	24	48.81	54	-5.19	-	-	94	106	V
7	5.46998	32.14	RMS	34.9	-20.2	24	47.08	-	-	-	-	94	106	V
8	5.46569	33.49	RMS	34.9	-20.1	24	48.53	-	-	-	-	94	106	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (802.11ax HE160 / 5570 MHz LOWER)

HORIZONTAL PEAK AND AVERAGE DATA

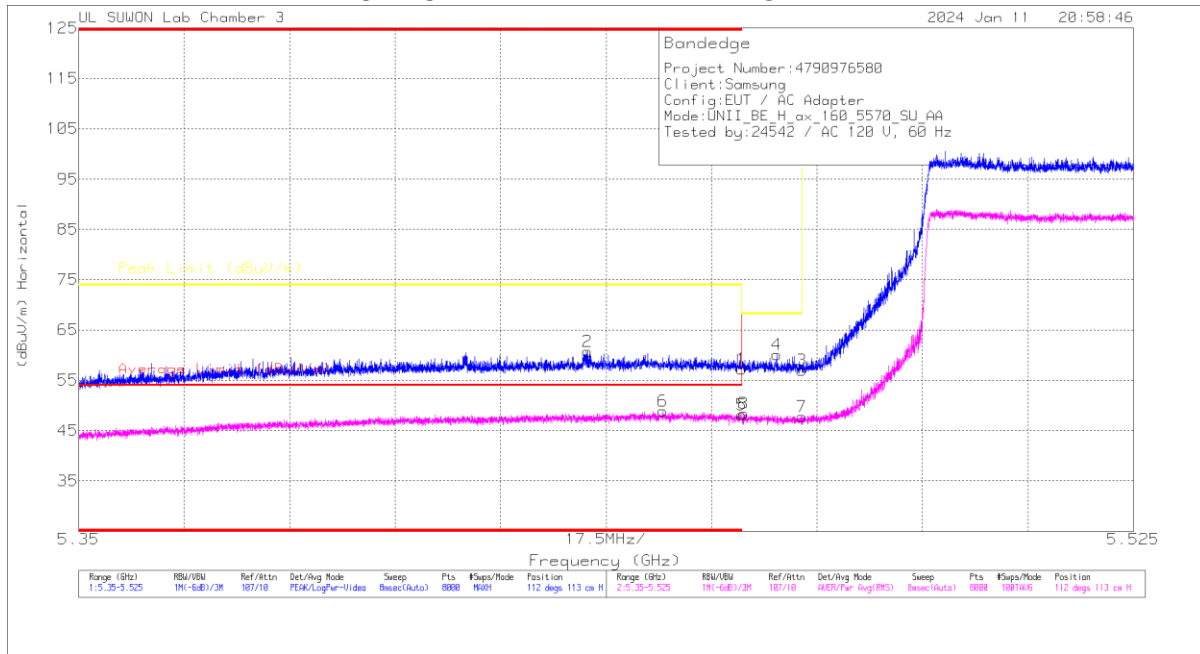


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna Connection Factor(dBm)	Path loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45998	42.45	PK	34.9	-20.1	0	57.25	-	-	74	-16.75	112	113	H
2	* 5.43438	46.05	PK	34.9	-20.2	0	60.75	-	-	74	-13.25	112	113	H
3	* 5.46998	42.26	PK	34.9	-20.2	0	56.96	-	-	68.2	-11.24	112	113	H
4	* 5.46584	45.28	PK	34.9	-20.1	0	60.08	-	-	68.2	-8.12	112	113	H
5	* 5.45998	33.36	RMS	34.9	-20.1	0	48.16	54	-5.84	-	-	112	113	H
6	* 5.44694	34.05	RMS	34.9	-20.1	0	48.85	54	-5.15	-	-	112	113	H
7	* 5.46998	33.07	RMS	34.9	-20.2	0	47.77	-	-	-	-	112	113	H
8	* 5.46035	33.74	RMS	34.9	-20.2	0	48.44	-	-	-	-	112	113	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (802.11ax HE160 / 5570 MHz LOWER)

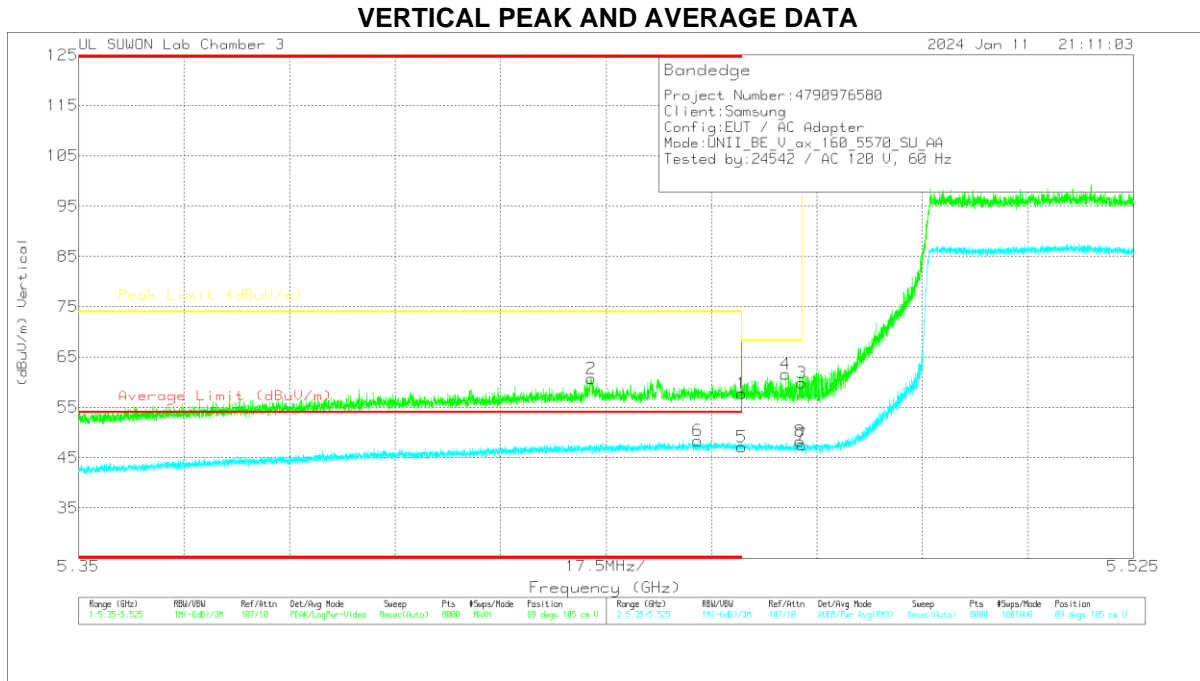

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna Connection Factor(dBm)	Path loss(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (m)	Polarity
1	* 5.45998	42.94	PK	34.9	-20.1	0	57.74	-	-	74	-16.26	89	105	V
2	* 5.43306	45.98	PK	34.9	-20.2	0	60.88	-	-	74	-13.32	89	105	V
3	* 5.46998	45.13	PK	34.9	-20.2	0	59.83	-	-	68.2	-8.37	89	105	V
4	* 5.46729	46.86	PK	34.9	-20.2	0	61.56	-	-	68.2	-6.64	89	105	V
5	* 5.45998	32.34	RMS	34.9	-20.1	0	47.14	54	-6.86	-	-	89	105	V
6	* 5.45272	33.55	RMS	34.9	-20.1	0	48.35	54	-5.65	-	-	89	105	V
7	* 5.46998	32.88	RMS	34.9	-20.2	0	47.58	-	-	-	-	89	105	V
8	* 5.46963	33.53	RMS	34.9	-20.2	0	48.23	-	-	-	-	89	105	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

END OF TEST REPORT