

# FCC LTE REPORT

## Certification

**Applicant Name:**

SAMSUNG Electronics Co., Ltd.

**Date of Issue:**

October 25, 2023

**Location:**

HCT CO., LTD.,

**Address:**

 129, Samsung-ro, Yeongtong-gu,  
 Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

 74, Seoicheon-ro 578beon-gil, Majang-myeon,  
 Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

**Report No.:** HCT-RF-2310-FC070-R1

**FCC ID:**
**A3LSMS926B**
**APPLICANT:**
**SAMSUNG Electronics Co., Ltd.**

Model(s): SM-S926B/DS

Additional Model(s): SM-S926B

EUT Type: Mobile phone

FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part(s): §27

**Main 1 Ant**

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band66 (1.4)	1710.7 – 1779.3	1M09G7D	QPSK	0.152	21.83
		1M10W7D	16QAM	0.127	21.03
		1M10W7D	64QAM	0.102	20.09
		1M10W7D	256QAM	0.051	17.11
LTE – Band66 (3)	1711.5 – 1778.5	2M72G7D	QPSK	0.153	21.86
		2M72W7D	16QAM	0.127	21.05
		2M71W7D	64QAM	0.103	20.12
		2M71W7D	256QAM	0.051	17.08
LTE – Band66 (5)	1712.5 – 1777.5	4M53G7D	QPSK	0.151	21.79
		4M52W7D	16QAM	0.128	21.07
		4M55W7D	64QAM	0.101	20.06
		4M52W7D	256QAM	0.051	17.05
LTE – Band66 (10)	1715.0 – 1775.0	9M02G7D	QPSK	0.153	21.84
		9M02W7D	16QAM	0.125	20.96
		9M01W7D	64QAM	0.100	20.01
		9M01W7D	256QAM	0.050	17.00
LTE – Band66 (15)	1717.5 – 1772.5	13M5G7D	QPSK	0.152	21.82
		13M5W7D	16QAM	0.129	21.09
		13M5W7D	64QAM	0.101	20.04
		13M5W7D	256QAM	0.050	17.03
LTE – Band66 (20)	1720.0 – 1770.0	17M9G7D	QPSK	0.151	21.80
		17M9W7D	16QAM	0.125	20.97
		17M9W7D	64QAM	0.102	20.10
		18M0W7D	256QAM	0.050	17.02

**Sub 2 Ant**

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band66 (1.4)	1710.7 – 1779.3	1M10G7D	QPSK	0.134	21.28
		1M09W7D	16QAM	0.112	20.48
		1M10W7D	64QAM	0.087	19.39
		1M10W7D	256QAM	0.044	16.41
LTE – Band66 (3)	1711.5 – 1778.5	2M72G7D	QPSK	0.134	21.28
		2M71W7D	16QAM	0.111	20.47
		2M72W7D	64QAM	0.087	19.42
		2M71W7D	256QAM	0.044	16.43
LTE – Band66 (5)	1712.5 – 1777.5	4M52G7D	QPSK	0.132	21.20
		4M53W7D	16QAM	0.110	20.41
		4M54W7D	64QAM	0.086	19.37
		4M52W7D	256QAM	0.044	16.39
LTE – Band66 (10)	1715.0 – 1775.0	9M01G7D	QPSK	0.133	21.25
		9M00W7D	16QAM	0.110	20.43
		9M02W7D	64QAM	0.088	19.45
		9M02W7D	256QAM	0.044	16.39
LTE – Band66 (15)	1717.5 – 1772.5	13M5G7D	QPSK	0.138	21.40
		13M5W7D	16QAM	0.116	20.64
		13M5W7D	64QAM	0.091	19.61
		13M5W7D	256QAM	0.046	16.66
LTE – Band66 (20)	1720.0 – 1770.0	18M0G7D	QPSK	0.131	21.18
		17M9W7D	16QAM	0.109	20.36
		17M9W7D	64QAM	0.087	19.38
		18M0W7D	256QAM	0.044	16.39

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

## REVIEWED BY



---

Report prepared by : Jae Mun Do  
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.  
This test results were applied only to the test methods required by the standard.

## Test Report Statement:

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2310-FC070	October 17, 2023	- First Approval Report
HCT-RF-2310-FC070-R1	October 25, 2023	- Revised the typo on 78 Page.

## Table of Contents

<b>REVIEWED BY .....</b>	<b>3</b>
<b>1. GENERAL INFORMATION .....</b>	<b>6</b>
<b>2. INTRODUCTION .....</b>	<b>7</b>
<b>2.1. DESCRIPTION OF EUT.....</b>	<b>7</b>
<b>2.2. MEASURING INSTRUMENT CALIBRATION .....</b>	<b>7</b>
<b>2.3. TEST FACILITY .....</b>	<b>7</b>
<b>3. DESCRIPTION OF TESTS.....</b>	<b>8</b>
<b>3.1 TEST PROCEDURE .....</b>	<b>8</b>
<b>3.2 RADIATED POWER.....</b>	<b>9</b>
<b>3.3 RADIATED SPURIOUS EMISSIONS .....</b>	<b>10</b>
<b>3.4 PEAK- TO- AVERAGE RATIO .....</b>	<b>11</b>
<b>3.5 OCCUPIED BANDWIDTH.....</b>	<b>13</b>
<b>3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....</b>	<b>14</b>
<b>3.7 BAND EDGE .....</b>	<b>15</b>
<b>3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....</b>	<b>17</b>
<b>3.9 WORST CASE(RADIATED TEST) .....</b>	<b>18</b>
<b>3.10 WORST CASE(CONDUCTED TEST) .....</b>	<b>20</b>
<b>4. LIST OF TEST EQUIPMENT .....</b>	<b>21</b>
<b>5. MEASUREMENT UNCERTAINTY .....</b>	<b>22</b>
<b>6. SUMMARY OF TEST RESULTS .....</b>	<b>23</b>
<b>7. SAMPLE CALCULATION .....</b>	<b>24</b>
<b>8. TEST DATA(Main 1 Ant).....</b>	<b>26</b>
<b>8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....</b>	<b>26</b>
<b>8.2 RADIATED SPURIOUS EMISSIONS .....</b>	<b>29</b>
<b>8.3 PEAK-TO-AVERAGE RATIO.....</b>	<b>30</b>
<b>8.4 OCCUPIED BANDWIDTH .....</b>	<b>31</b>
<b>8.5 CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>32</b>
<b>8.6 BAND EDGE .....</b>	<b>33</b>
<b>8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....</b>	<b>34</b>
<b>9. TEST DATA(Main 1 Ant).....</b>	<b>52</b>
<b>9.1 EQUIVALENT ISOTROPIC RADIATED POWER.....</b>	<b>52</b>
<b>9.2 RADIATED SPURIOUS EMISSIONS .....</b>	<b>55</b>
<b>9.3 PEAK-TO-AVERAGE RATIO.....</b>	<b>56</b>
<b>9.4 OCCUPIED BANDWIDTH .....</b>	<b>57</b>
<b>9.5 CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>58</b>
<b>9.6 BAND EDGE .....</b>	<b>59</b>
<b>9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....</b>	<b>60</b>
<b>10. TEST DATA (Main 1 Ant , Sub 2 Ant) .....</b>	<b>78</b>
<b>10.1 UPLINK CARRIER AGGREGATION .....</b>	<b>78</b>
<b>10.1.1 RADIATED SPURIOUS EMISSIONS .....</b>	<b>78</b>
<b>11. TEST PLOTS(Main 1 Ant) .....</b>	<b>79</b>
<b>12. TEST PLOTS(Sub 2 Ant) .....</b>	<b>200</b>
<b>13. ANNEX A_ TEST SETUP PHOTO.....</b>	<b>321</b>

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMS926B
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§27
<b>EUT Type:</b>	Mobile phone
<b>Model(s):</b>	SM-S926B/DS
<b>Additional Model(s):</b>	SM-S926B
<b>Tx Frequency:</b>	1710.7 MHz – 1779.3 MHz (LTE – Band 66 (1.4 MHz)) 1711.5 MHz – 1778.5 MHz (LTE – Band 66 (3 MHz)) 1712.5 MHz – 1777.5 MHz (LTE – Band 66 (5 MHz)) 1715.0 MHz – 1775.0 MHz (LTE – Band 66 (10 MHz)) 1717.5 MHz – 1772.5 MHz (LTE – Band 66 (15 MHz)) 1720.0 MHz – 1770.0 MHz (LTE – Band 66 (20 MHz))
<b>Date(s) of Tests:</b>	August 29, 2023 ~ October 10, 2023
<b>Serial number:</b>	Radiated: R3CW70NE0XA Conducted: R3CW70NDT7T

## 2. INTRODUCTION

### 2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), WIFI 6E, Bluetooth, BT LE, NFC, UWB, WPT.

### 2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

### 3.2 RADIATED POWER

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

#### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

#### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.  
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points > 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result (dBm)} = P_g (\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP(dBm)} = \text{ERP(dBm)} + 2.15 \text{ dB}$$

### 3.4 PEAK- TO- AVERAGE RATIO

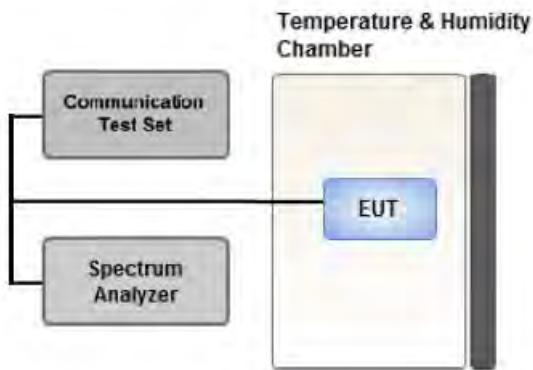

#### Test setup

##### ① CCDF Procedure for PAPR

###### **Test Settings**

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - .- for continuous transmissions, set to 1 ms,
  - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

**② Alternate Procedure for PAPR**

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R \text{ (dB)} = P_{Pk} \text{ (dBm)} - P_{Avg} \text{ (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

**Test Settings(Peak Power)**

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.


1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

**Test Settings(Average Power)**

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  

Set  $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$  for single sweep  
(automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6 \text{ dB}$  if the duty cycle is a constant 25 %.

### 3.5 OCCUPIED BANDWIDTH.

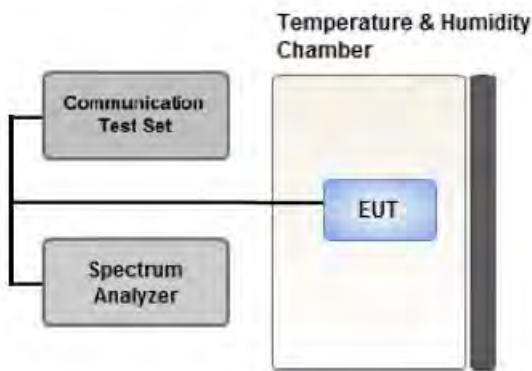

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

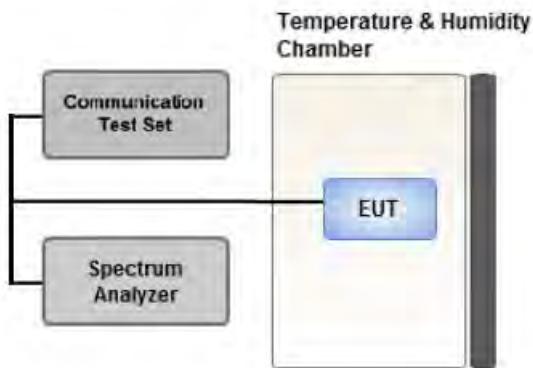

#### Test setup

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

### 3.7 BAND EDGE

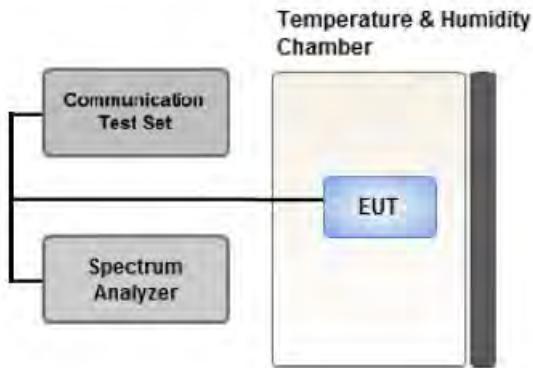

#### Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

**Test Notes**


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by  $10 \log(1 \text{ MHz}/ \text{RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

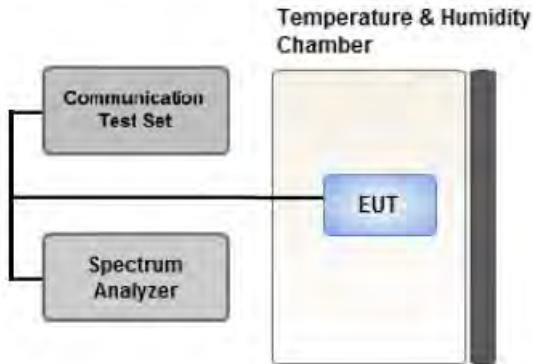

#### Test setup

##### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**3.9 WORST CASE(RADIATED TEST)**

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.

- All modes of operation were investigated and the worst case configuration results are reported.

Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)

Worst case : Stand alone

- We were performed the RSE test in condition of co-location.

Mode : Stand alone, Simultaneous transmission scenarios

Worst case : Stand alone

- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 3 MHz(Main 1 Ant), 15 MHz(Sub 2 Ant))

- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.

- Please refer to the table below.

- SM-S926B/DS & additional models were tested and the worst case results are reported.

(Worst case : SM-S926B/DS)

[ Main 1 Ant Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
<b>Effective Isotropic Radiated Power</b>	QPSK, 16QAM, 64QAM, 256QAM	1	0	Z
<b>Radiated Spurious and Harmonic Emissions</b>	QPSK	1	0	Y

[ Sub 2 Ant Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset	Axis
<b>Effective Isotropic Radiated Power</b>	QPSK, 16QAM, 64QAM, 256QAM	1.4	Low	1	5	X
			Mid, High	1	0	
		3	Low	1	14	
			Mid, High	1	0	
		5	Low	1	24	
			Mid, High	1	0	
		10	Low	1	49	
			Mid, High	1	0	
		15	Low	1	74	
			Mid, High	1	0	
		20	Low	1	99	
			Mid, High	1	0	
<b>Radiated Spurious and Harmonic Emissions</b>	QPSK	15	Low	1	74	Z
			Mid, High	1	0	

### 3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- SM-S926B/DS & additional models were tested and the worst case results are reported.  
(Worst case : SM-S926B/DS)

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

#### 4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	FBSR-02B(1.2G HPF+LNA)	T&M SYSTEM	F1L1	01/19/2024	Annual
RF Switching System	FBSR-02B(3.3G HPF+LNA)	T&M SYSTEM	F1L2	01/19/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/19/2024	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/23/2024	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/20/2024	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/19/2024	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/17/2024	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/10/2024	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	03/21/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	12/01/2023	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/05/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	06/22/2024	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/24/2024	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.16 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.57 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(h)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, § 27.54	Emission must remain in band	PASS

**Note:**

1. See SAR Report

### 6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(d)(4)	< 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(h)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

**ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
132322	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

**EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

**Emission Designator = 249KGXW**

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

**Emission Designator = 249KG7W**

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

**Emission Designator = 4M17F9W**

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA(Main 1 Ant)

### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		
									W	W	dBm
1710.7	LTE B66 1.4 MHz	QPSK	-19.73	14.00	9.94	2.24	V	< 1.00	0.148	21.70	
		16-QAM	-20.56	13.17	9.94	2.24	V		0.122	20.87	
		64-QAM	-21.53	12.20	9.94	2.24	V		0.098	19.90	
		256-QAM	-24.50	9.23	9.94	2.24	V		0.049	16.93	
		QPSK	-19.85	13.83	10.15	2.15	V		0.152	21.83	
		16-QAM	-20.65	13.03	10.15	2.15	V		0.127	21.03	
		64-QAM	-21.59	12.09	10.15	2.15	V		0.102	20.09	
		256-QAM	-24.57	9.11	10.15	2.15	V		0.051	17.11	
		QPSK	-20.11	13.58	10.21	2.26	V		0.142	21.53	
		16-QAM	-20.92	12.77	10.21	2.26	V		0.118	20.72	
		64-QAM	-21.87	11.82	10.21	2.26	V		0.095	19.77	
		256-QAM	-24.86	8.83	10.21	2.26	V		0.048	16.78	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		
									W	W	dBm
1711.5	LTE B66 3 MHz	QPSK	-19.64	14.09	9.94	2.24	V	< 1.00	0.151	21.79	
		16-QAM	-20.46	13.27	9.94	2.24	V		0.125	20.97	
		64-QAM	-21.46	12.27	9.94	2.24	V		0.099	19.97	
		256-QAM	-24.44	9.29	9.94	2.24	V		0.050	16.99	
		QPSK	-19.82	13.86	10.15	2.15	V		0.153	21.86	
		16-QAM	-20.63	13.05	10.15	2.15	V		0.127	21.05	
		64-QAM	-21.56	12.12	10.15	2.15	V		0.103	20.12	
		256-QAM	-24.60	9.08	10.15	2.15	V		0.051	17.08	
		QPSK	-20.04	13.65	10.21	2.26	V		0.144	21.60	
		16-QAM	-20.89	12.80	10.21	2.26	V		0.119	20.75	
		64-QAM	-21.84	11.85	10.21	2.26	V		0.095	19.80	
		256-QAM	-24.83	8.86	10.21	2.26	V		0.048	16.81	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		
									W	W	dBm
1712.5	LTE B66 5 MHz	QPSK	-19.70	14.03	9.94	2.24	V	< 1.00	0.149	21.73	
		16-QAM	-20.44	13.29	9.94	2.24	V		0.126	20.99	
		64-QAM	-21.43	12.30	9.94	2.24	V		0.100	20.00	
		256-QAM	-24.43	9.30	9.94	2.24	V		0.050	17.00	
		QPSK	-19.89	13.79	10.15	2.15	V		0.151	21.79	
		16-QAM	-20.61	13.07	10.15	2.15	V		0.128	21.07	
		64-QAM	-21.62	12.06	10.15	2.15	V		0.101	20.06	
		256-QAM	-24.63	9.05	10.15	2.15	V		0.051	17.05	
		QPSK	-20.12	13.57	10.21	2.26	V		0.142	21.52	
		16-QAM	-20.88	12.81	10.21	2.26	V		0.119	20.76	
		64-QAM	-21.86	11.83	10.21	2.26	V		0.095	19.78	
		256-QAM	-24.86	8.83	10.21	2.26	V		0.048	16.78	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		
									W	W	dBm
1715.0	LTE B66 10 MHz	QPSK	-19.66	13.98	9.98	2.23	V	< 1.00	0.149	21.72	
		16-QAM	-20.55	13.09	9.98	2.23	V		0.121	20.83	
		64-QAM	-21.44	12.20	9.98	2.23	V		0.099	19.94	
		256-QAM	-24.50	9.14	9.98	2.23	V		0.049	16.88	
		QPSK	-19.84	13.84	10.15	2.15	V		0.153	21.84	
		16-QAM	-20.72	12.96	10.15	2.15	V		0.125	20.96	
		64-QAM	-21.67	12.01	10.15	2.15	V		0.100	20.01	
		256-QAM	-24.68	9.00	10.15	2.15	V		0.050	17.00	
		QPSK	-20.26	13.39	10.21	2.25	V		0.136	21.35	
		16-QAM	-21.12	12.53	10.21	2.25	V		0.112	20.49	
		64-QAM	-22.06	11.59	10.21	2.25	V		0.090	19.55	
		256-QAM	-25.02	8.63	10.21	2.25	V		0.046	16.59	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
									W	W
1717.5	LTE B66 15 MHz	QPSK	-19.76	13.88	10.01	2.22	V	< 1.00	0.147	21.67
		16-QAM	-20.53	13.11	10.01	2.22	V		0.123	20.90
		64-QAM	-21.51	12.13	10.01	2.22	V		0.098	19.92
		256-QAM	-24.53	9.11	10.01	2.22	V		0.049	16.90
		QPSK	-19.86	13.82	10.15	2.15	V		0.152	21.82
		16-QAM	-20.59	13.09	10.15	2.15	V		0.129	21.09
		64-QAM	-21.64	12.04	10.15	2.15	V		0.101	20.04
		256-QAM	-24.65	9.03	10.15	2.15	V		0.050	17.03
		QPSK	-20.65	12.96	10.20	2.23	V		0.124	20.93
		16-QAM	-21.06	12.55	10.20	2.23	V		0.113	20.52
		64-QAM	-22.08	11.53	10.20	2.23	V		0.089	19.50
		256-QAM	-25.05	8.56	10.20	2.23	V		0.045	16.53

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
									W	W
1720.0	LTE B66 20 MHz	QPSK	-19.66	13.85	10.01	2.22	V	< 1.00	0.146	21.64
		16-QAM	-20.52	12.99	10.01	2.22	V		0.120	20.78
		64-QAM	-21.52	11.99	10.01	2.22	V		0.095	19.78
		256-QAM	-24.52	8.99	10.01	2.22	V		0.048	16.78
		QPSK	-19.88	13.80	10.15	2.15	V		0.151	21.80
		16-QAM	-20.71	12.97	10.15	2.15	V		0.125	20.97
		64-QAM	-21.58	12.10	10.15	2.15	V		0.102	20.10
		256-QAM	-24.66	9.02	10.15	2.15	V		0.050	17.02
		QPSK	-20.10	13.51	10.20	2.23	V		0.141	21.48
		16-QAM	-20.80	12.81	10.20	2.23	V		0.120	20.78
		64-QAM	-21.77	11.84	10.20	2.23	V		0.096	19.81
		256-QAM	-24.77	8.84	10.20	2.23	V		0.048	16.81

## 8.2 RADIATED SPURIOUS EMISSIONS

OPERATING FREQUENCY: 1745.0 MHz  
 MEASURED OUTPUT POWER: 21.86 dBm = 0.154 W  
 MODE: LTE B66  
 MODULATION SIGNAL: 3 MHz QPSK  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  34.86 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
131987 (1711.5)	3 423.00	-54.86	12.44	-61.78	3.03	V	-52.37	74.23
	5 134.50	-57.80	12.33	-55.19	3.94	V	-46.80	68.66
	6 846.00	-56.93	11.91	-50.55	4.49	V	-43.13	64.99
132322 (1745.0)	3 490.00	-55.58	12.34	-61.59	3.08	H	-52.33	74.20
	5 235.00	-57.42	12.84	-56.50	3.95	H	-47.61	69.48
	6 980.00	-57.60	11.40	-49.99	4.56	H	-43.15	65.02
132657 (1778.5)	3 557.00	-54.81	12.34	-60.60	3.24	V	-51.50	73.37
	5 335.50	-56.61	13.09	-55.98	3.94	H	-46.84	68.70
	7 114.00	-57.56	10.85	-48.58	4.58	H	-42.31	64.17

### 8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)		
66	1.4 MHz	1745.0	QPSK	6	0	5.79		
			16-QAM			6.46		
			64-QAM			6.55		
			256-QAM			6.89		
	3 MHz		QPSK	15		5.84		
			16-QAM			6.50		
			64-QAM			6.51		
			256-QAM			6.77		
	5 MHz		QPSK	25		5.76		
			16-QAM			6.52		
			64-QAM			6.50		
			256-QAM			6.68		
	10 MHz		QPSK	50		5.86		
			16-QAM			6.46		
			64-QAM			6.51		
			256-QAM			6.74		
	15 MHz		QPSK	75		5.70		
			16-QAM			6.40		
			64-QAM			6.48		
			256-QAM			6.74		
	20 MHz		QPSK	100		5.70		
			16-QAM			6.44		
			64-QAM			6.50		
			256-QAM			6.75		

**Note:**

- Plots of the EUT's Peak- to- Average Ratio are shown Page 140 ~ 163.

#### 8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)		
66	1.4 MHz	1745.0	QPSK	6	0	1.0937		
			16-QAM			1.0987		
			64-QAM			1.1029		
			256-QAM			1.0981		
	3 MHz		QPSK	15		2.7226		
			16-QAM			2.7238		
			64-QAM			2.7061		
			256-QAM			2.7133		
	5 MHz		QPSK	25		4.5248		
			16-QAM			4.5178		
			64-QAM			4.5517		
			256-QAM			4.5171		
	10 MHz		QPSK	50		9.0193		
			16-QAM			9.0149		
			64-QAM			9.0134		
			256-QAM			9.0082		
	15 MHz		QPSK	75		13.497		
			16-QAM			13.490		
			64-QAM			13.538		
			256-QAM			13.477		
	20 MHz		QPSK	100		17.930		
			16-QAM			17.934		
			64-QAM			17.929		
			256-QAM			17.962		

**Note:**

- Plots of the EUT's Occupied Bandwidth are shown Page 116 ~ 139.

## 8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
66	1.4	1710.7	3.4213	27.976	-75.376	-47.400	-13.00
		1745.0	3.4896	27.976	-75.897	-47.921	
		1779.3	3.5599	27.976	-75.907	-47.931	
	3	1711.5	3.4213	27.976	-74.427	-46.451	
		1745.0	3.4881	27.976	-74.674	-46.698	
		1778.5	3.5604	27.976	-76.016	-48.040	
	5	1712.5	3.4213	27.976	-74.429	-46.453	
		1745.0	3.4861	27.976	-75.966	-47.990	
		1777.5	3.5599	27.976	-77.253	-49.277	
	10	1715.0	3.4218	27.976	-75.366	-47.390	
		1745.0	3.4816	27.976	-74.691	-46.715	
		1775.0	3.5594	27.976	-76.184	-48.208	
	15	1717.5	3.4223	27.976	-75.715	-47.739	
		1745.0	3.4771	27.976	-76.114	-48.138	
		1772.5	3.5589	27.976	-75.954	-47.978	
	20	1720.0	3.4228	27.976	-75.133	-47.157	
		1745.0	3.4726	27.976	-75.372	-47.396	
		1770.0	3.5584	27.976	-76.656	-48.680	

**Note:**

- Plots of the EUT's Conducted Spurious Emissions are shown Page 164 ~ 199.
- Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
- Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
- Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


## 8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 80 ~ 115.

## 8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- MODE: LTE 66
- OPERATING FREQUENCY: 1710,700,000 Hz
- CHANNEL: 131979 (1.4 MHz)
- REFERENCE VOLTAGE: 3.880 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1710 700 008	0.0	0.000 000	0.000
100 %		-30	1710 700 012	3.8	0.000 000	0.002
100 %		-20	1710 700 012	4.0	0.000 000	0.002
100 %		-10	1710 700 014	6.3	0.000 000	0.004
100 %		0	1710 700 012	4.6	0.000 000	0.003
100 %		+10	1710 700 011	3.4	0.000 000	0.002
100 %		+30	1710 700 012	4.5	0.000 000	0.003
100 %		+40	1710 700 012	4.0	0.000 000	0.002
100 %		+50	1710 700 013	4.7	0.000 000	0.003
Batt. Endpoint	3.300	+20	1710 700 004	-3.4	0.000 000	-0.002

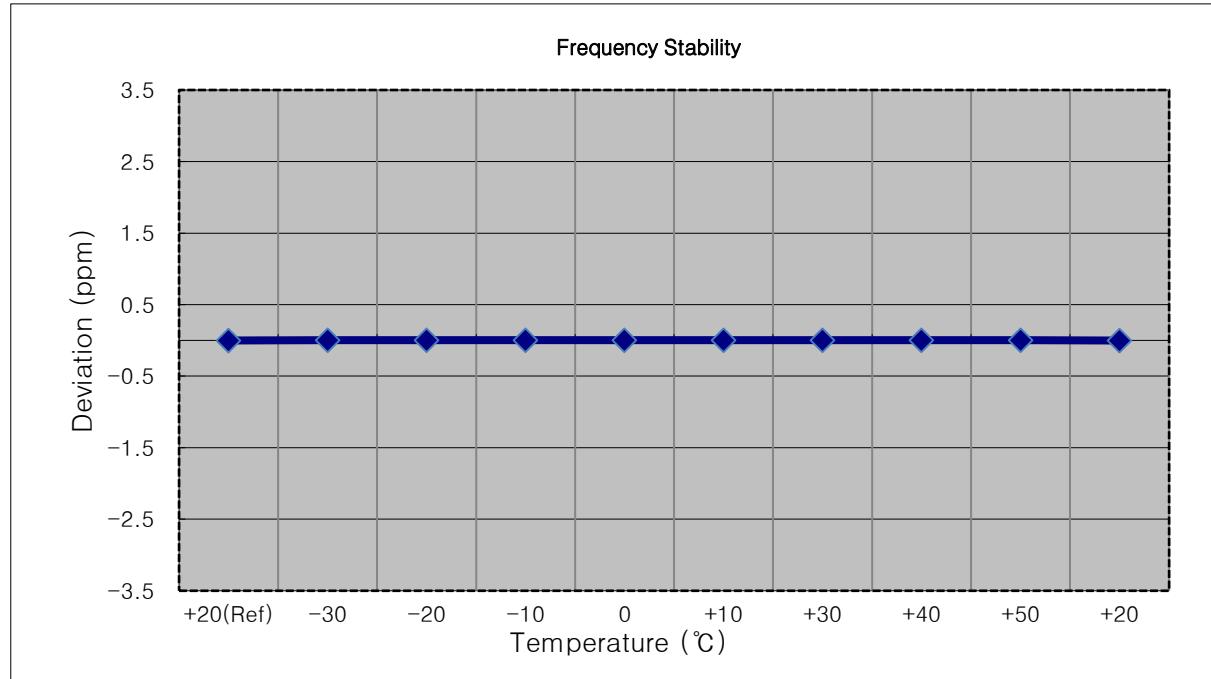


- MODE: LTE 66  
 OPERATING FREQUENCY: 1711,500,000 Hz  
 CHANNEL: 131987 (3 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1711 500 003	0.0	0.000 000	0.000
100 %		-30	1711 499 998	-5.6	0.000 000	-0.003
100 %		-20	1711 500 006	2.9	0.000 000	0.002
100 %		-10	1711 500 000	-3.5	0.000 000	-0.002
100 %		0	1711 499 999	-4.4	0.000 000	-0.003
100 %		+10	1711 500 006	2.8	0.000 000	0.002
100 %		+30	1711 500 006	3.0	0.000 000	0.002
100 %		+40	1711 499 999	-4.0	0.000 000	-0.002
100 %		+50	1711 499 998	-5.4	0.000 000	-0.003
Batt. Endpoint	3.300	+20	1711 500 007	3.4	0.000 000	0.002

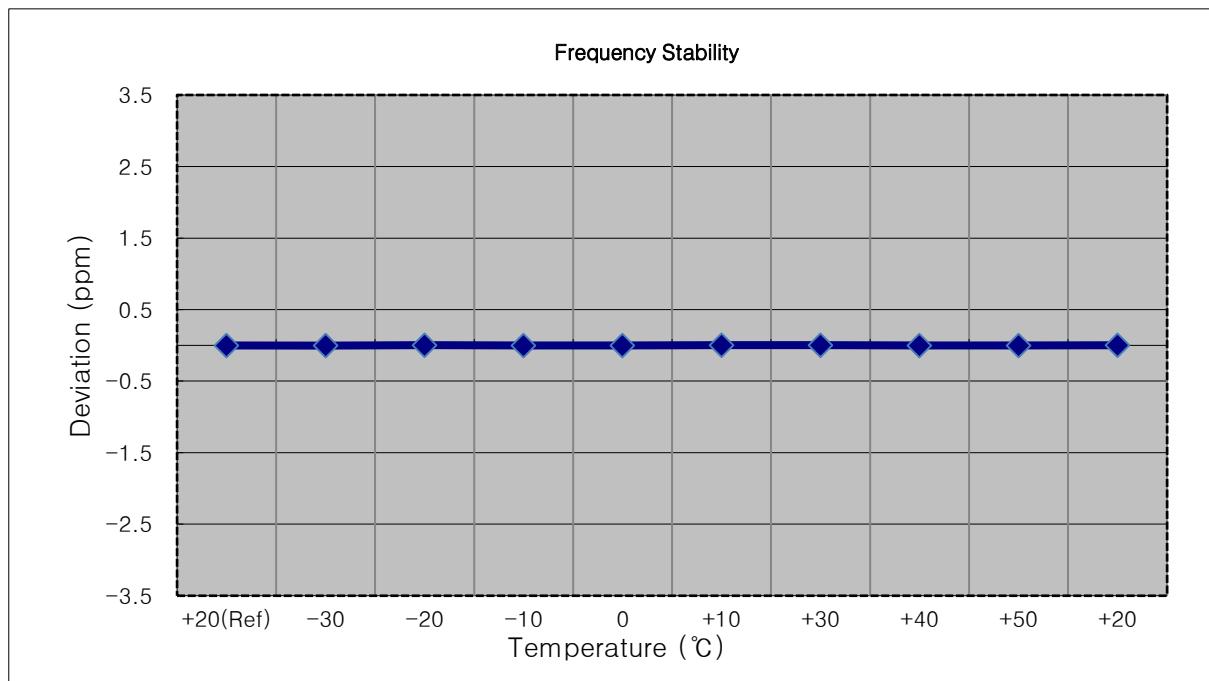


- MODE: LTE 66  
 OPERATING FREQUENCY: 1712,500,000 Hz  
 CHANNEL: 131997 (5 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1712 499 996	0.0	0.000 000	0.000
100 %		-30	1712 499 998	2.7	0.000 000	0.002
100 %		-20	1712 499 990	-5.4	0.000 000	-0.003
100 %		-10	1712 500 001	5.2	0.000 000	0.003
100 %		0	1712 499 998	2.3	0.000 000	0.001
100 %		+10	1712 499 999	3.5	0.000 000	0.002
100 %		+30	1712 500 000	3.9	0.000 000	0.002
100 %		+40	1712 499 998	2.5	0.000 000	0.001
100 %		+50	1712 500 000	4.2	0.000 000	0.002
Batt. Endpoint	3.300	+20	1712 500 001	4.9	0.000 000	0.003

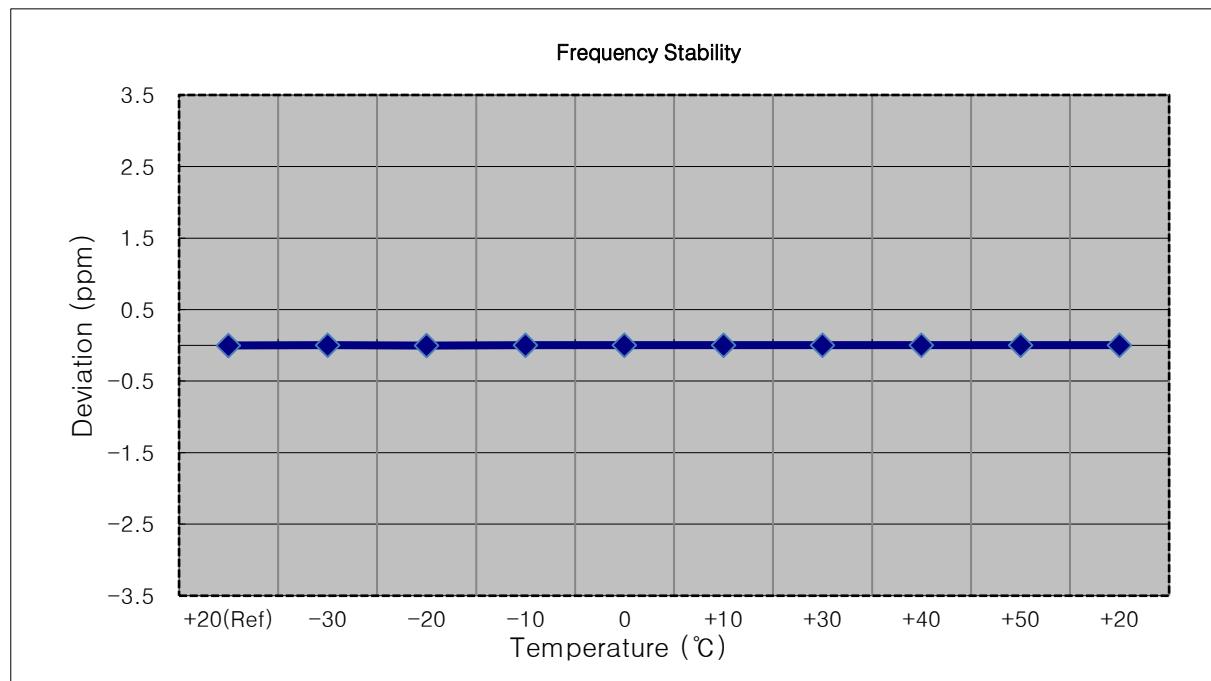


- MODE: LTE 66  
 OPERATING FREQUENCY: 1715,000,000 Hz  
 CHANNEL: 132022 (10 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1715 000 003	0.0	0.000 000	0.000
100 %		-30	1715 000 000	-2.5	0.000 000	-0.001
100 %		-20	1715 000 007	4.4	0.000 000	0.003
100 %		-10	1714 999 999	-4.3	0.000 000	-0.003
100 %		0	1714 999 998	-4.7	0.000 000	-0.003
100 %		+10	1714 999 997	-5.5	0.000 000	-0.003
100 %		+30	1714 999 999	-3.6	0.000 000	-0.002
100 %		+40	1714 999 999	-4.0	0.000 000	-0.002
100 %		+50	1715 000 007	4.4	0.000 000	0.003
Batt. Endpoint	3.300	+20	1715 000 007	3.6	0.000 000	0.002

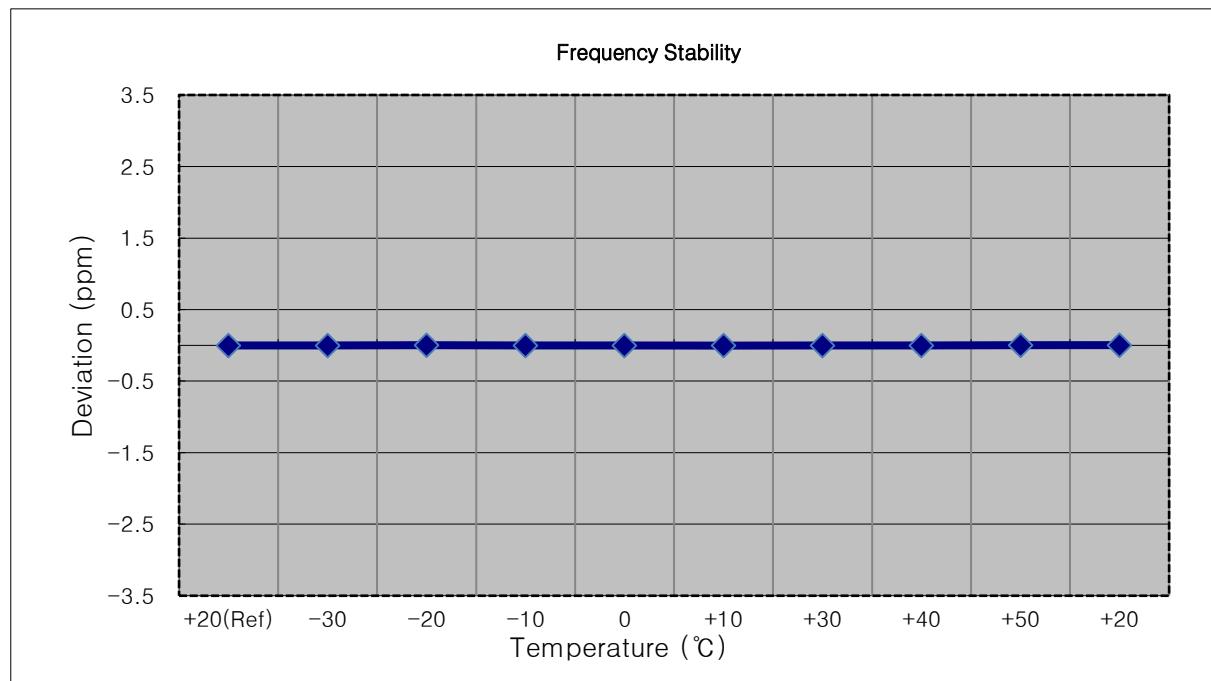


- MODE: LTE 66  
 OPERATING FREQUENCY: 1717,500,000 Hz  
 CHANNEL: 132047 (15 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1717 500 004	0.0	0.000 000	0.000
100 %		-30	1717 500 007	3.7	0.000 000	0.002
100 %		-20	1717 500 000	-3.9	0.000 000	-0.002
100 %		-10	1717 500 007	3.4	0.000 000	0.002
100 %		0	1717 500 010	6.0	0.000 000	0.003
100 %		+10	1717 499 999	-4.4	0.000 000	-0.003
100 %		+30	1717 500 008	4.2	0.000 000	0.002
100 %		+40	1717 500 008	4.6	0.000 000	0.003
100 %		+50	1717 500 006	2.4	0.000 000	0.001
Batt. Endpoint	3.300	+20	1717 500 007	3.3	0.000 000	0.002

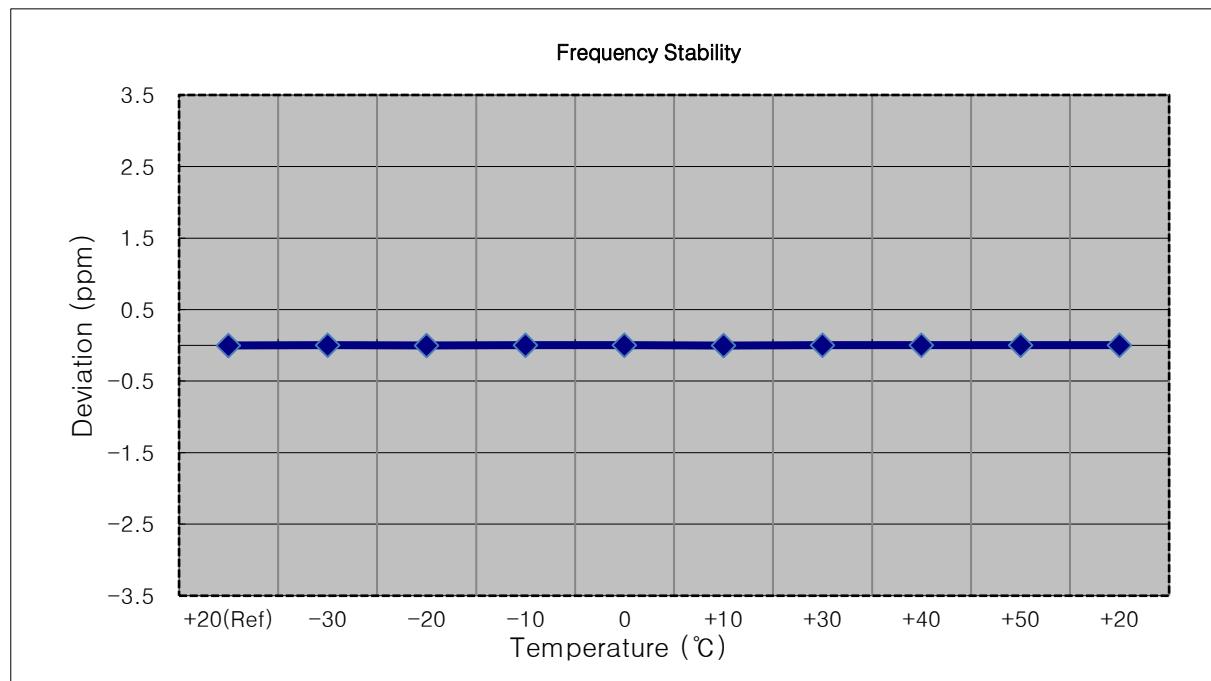


- MODE: LTE 66  
 OPERATING FREQUENCY: 1720,000,000 Hz  
 CHANNEL: 132072 (20 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1719 999 997	0.0	0.000 000	0.000
100 %		-30	1720 000 002	5.3	0.000 000	0.003
100 %		-20	1720 000 000	3.2	0.000 000	0.002
100 %		-10	1719 999 993	-3.8	0.000 000	-0.002
100 %		0	1720 000 002	5.7	0.000 000	0.003
100 %		+10	1719 999 999	2.7	0.000 000	0.002
100 %		+30	1719 999 995	-1.9	0.000 000	-0.001
100 %		+40	1719 999 993	-3.7	0.000 000	-0.002
100 %		+50	1719 999 993	-3.2	0.000 000	-0.002
Batt. Endpoint		3.300	+20	1719 999 994	-2.2	0.000 000

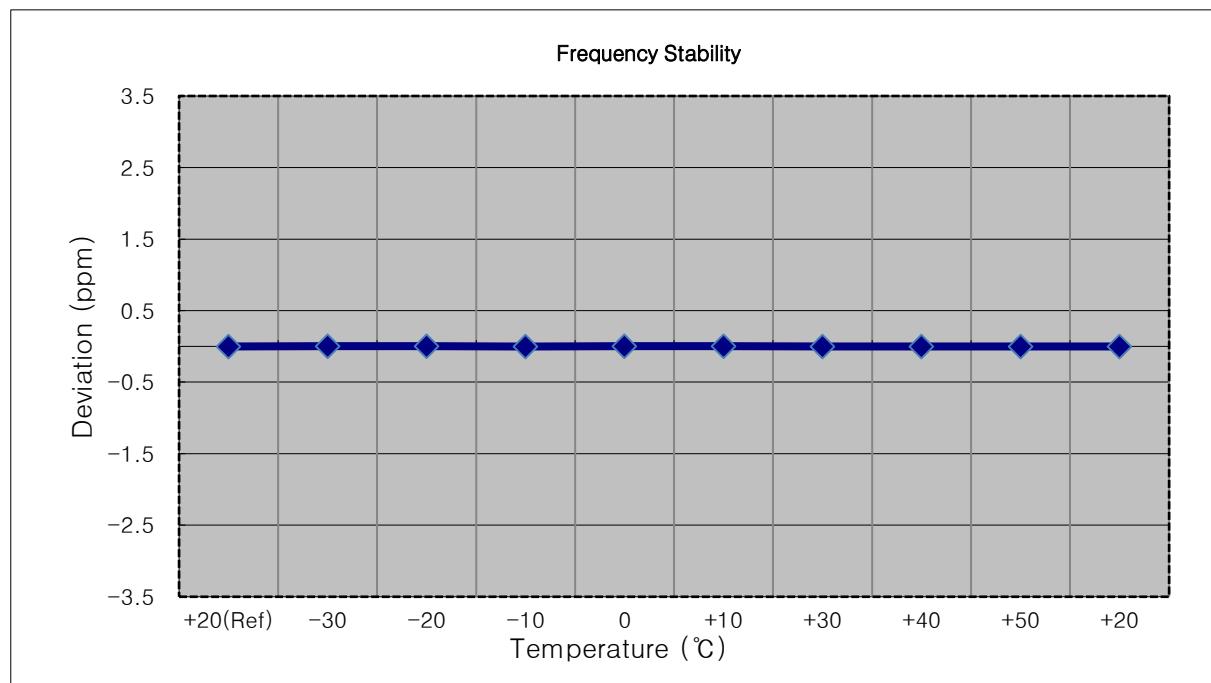


- MODE: LTE 66  
 OPERATING FREQUENCY: 1745,000,000 Hz  
 CHANNEL: 132322 (1.4 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 004	0.0	0.000 000	0.000
100 %		-30	1745 000 002	-1.6	0.000 000	-0.001
100 %		-20	1745 000 007	2.9	0.000 000	0.002
100 %		-10	1745 000 009	4.6	0.000 000	0.003
100 %		0	1745 000 001	-3.0	0.000 000	-0.002
100 %		+10	1745 000 007	3.4	0.000 000	0.002
100 %		+30	1745 000 008	4.2	0.000 000	0.002
100 %		+40	1745 000 007	3.0	0.000 000	0.002
100 %		+50	1745 000 007	2.9	0.000 000	0.002
Batt. Endpoint	3.300	+20	1745 000 008	3.8	0.000 000	0.002

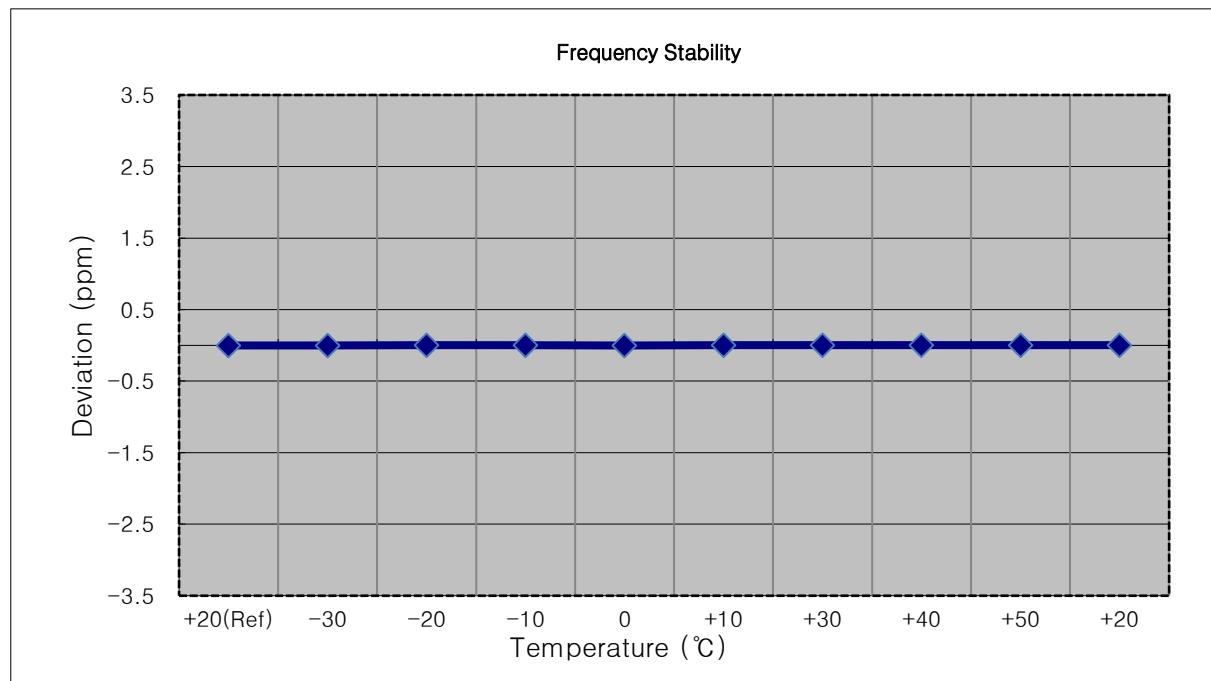


- MODE: LTE 66  
 OPERATING FREQUENCY: 1745,000,000 Hz  
 CHANNEL: 132322 (3 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 004	0.0	0.000 000	0.000
100 %		-30	1745 000 009	5.1	0.000 000	0.003
100 %		-20	1745 000 007	3.0	0.000 000	0.002
100 %		-10	1745 000 008	3.5	0.000 000	0.002
100 %		0	1745 000 002	-2.4	0.000 000	-0.001
100 %		+10	1745 000 009	5.2	0.000 000	0.003
100 %		+30	1745 000 001	-3.1	0.000 000	-0.002
100 %		+40	1745 000 009	4.5	0.000 000	0.003
100 %		+50	1745 000 007	2.8	0.000 000	0.002
Batt. Endpoint	3.300	+20	1745 000 008	3.6	0.000 000	0.002

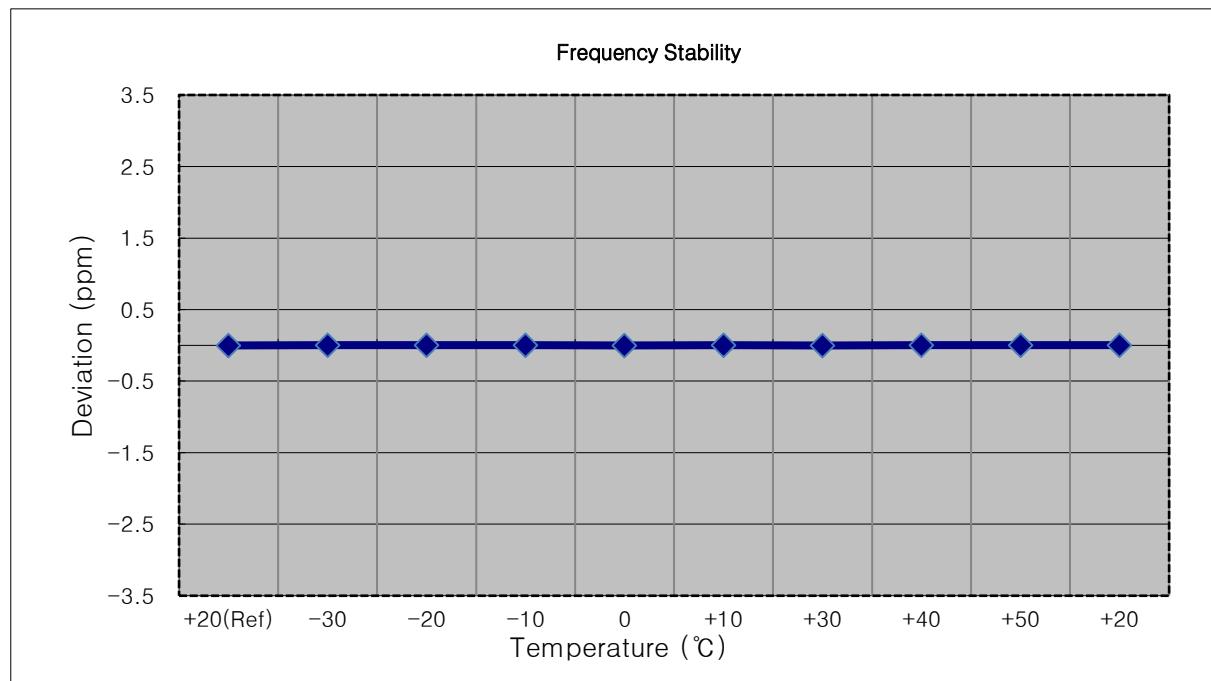


- MODE: LTE 66  
 OPERATING FREQUENCY: 1745,000,000 Hz  
 CHANNEL: 132322 (5 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 005	0.0	0.000 000	0.000
100 %		-30	1745 000 008	3.9	0.000 000	0.002
100 %		-20	1745 000 008	3.1	0.000 000	0.002
100 %		-10	1745 000 007	2.6	0.000 000	0.001
100 %		0	1745 000 001	-3.1	0.000 000	-0.002
100 %		+10	1745 000 002	-2.8	0.000 000	-0.002
100 %		+30	1745 000 007	2.3	0.000 000	0.001
100 %		+40	1745 000 000	-4.2	0.000 000	-0.002
100 %		+50	1745 000 007	2.4	0.000 000	0.001
Batt. Endpoint	3.300	+20	1745 000 008	3.0	0.000 000	0.002

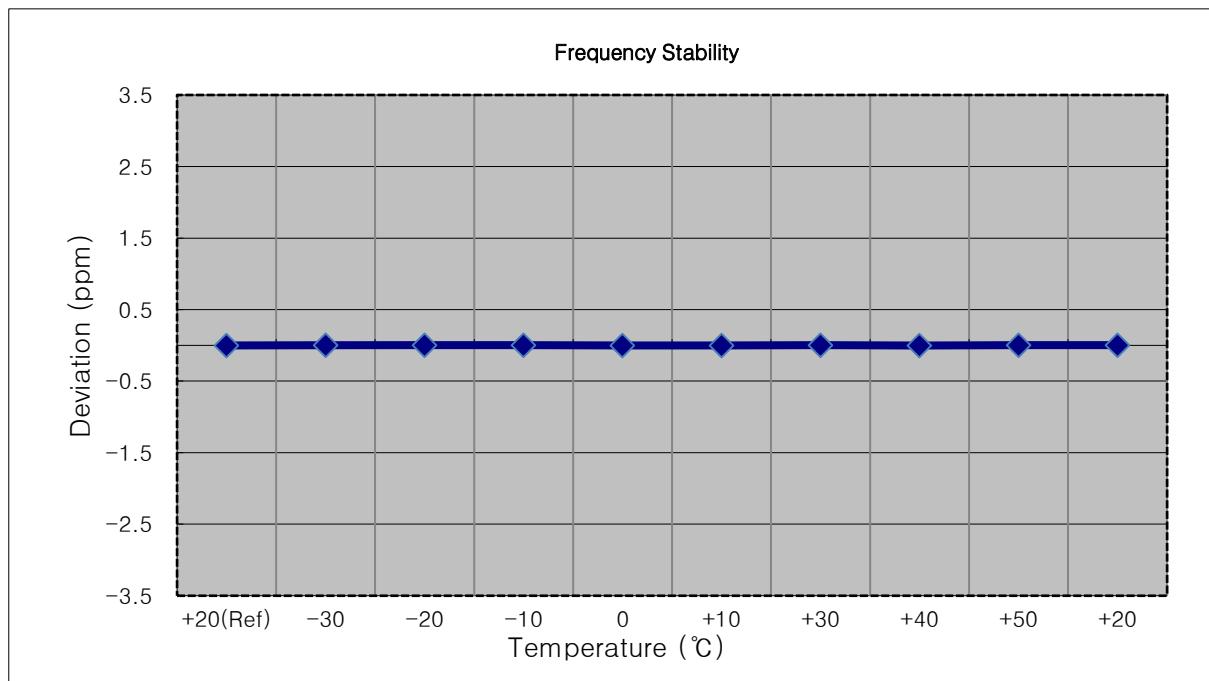


- MODE: LTE 66  
 OPERATING FREQUENCY: 1745,000,000 Hz  
 CHANNEL: 132322 (10 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1744 999 997	0.0	0.000 000	0.000
100 %		-30	1744 999 999	2.5	0.000 000	0.001
100 %		-20	1745 000 001	4.3	0.000 000	0.002
100 %		-10	1744 999 994	-2.5	0.000 000	-0.001
100 %		0	1745 000 000	3.0	0.000 000	0.002
100 %		+10	1744 999 999	2.4	0.000 000	0.001
100 %		+30	1745 000 000	2.8	0.000 000	0.002
100 %		+40	1744 999 995	-1.7	0.000 000	-0.001
100 %		+50	1744 999 998	1.5	0.000 000	0.001
Batt. Endpoint	3.300	+20	1744 999 999	1.6	0.000 000	0.001

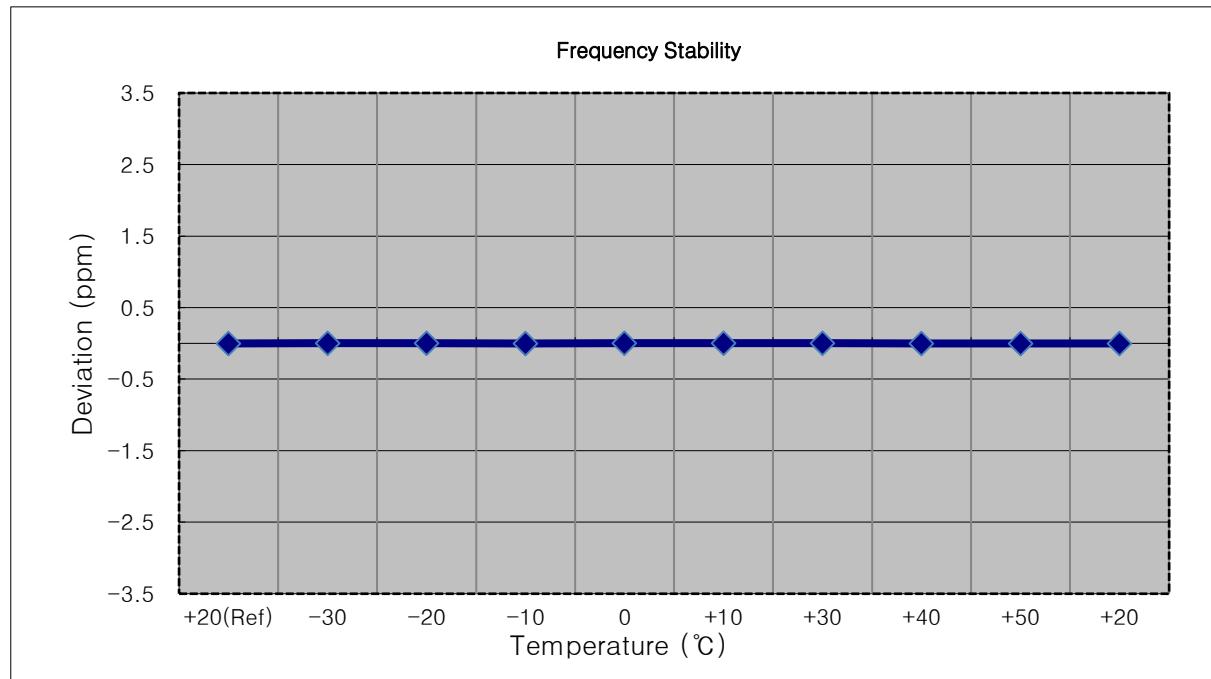


- MODE: LTE 66  
 OPERATING FREQUENCY: 1745,000,000 Hz  
 CHANNEL: 132322 (15 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 004	0.0	0.000 000	0.000
100 %		-30	1745 000 006	2.5	0.000 000	0.001
100 %		-20	1745 000 008	3.9	0.000 000	0.002
100 %		-10	1745 000 006	1.9	0.000 000	0.001
100 %		0	1745 000 001	-2.7	0.000 000	-0.002
100 %		+10	1745 000 006	2.0	0.000 000	0.001
100 %		+30	1745 000 001	-2.9	0.000 000	-0.002
100 %		+40	1744 999 999	-5.2	0.000 000	-0.003
100 %		+50	1745 000 006	2.4	0.000 000	0.001
Batt. Endpoint	3.300	+20	1745 000 001	-2.8	0.000 000	-0.002

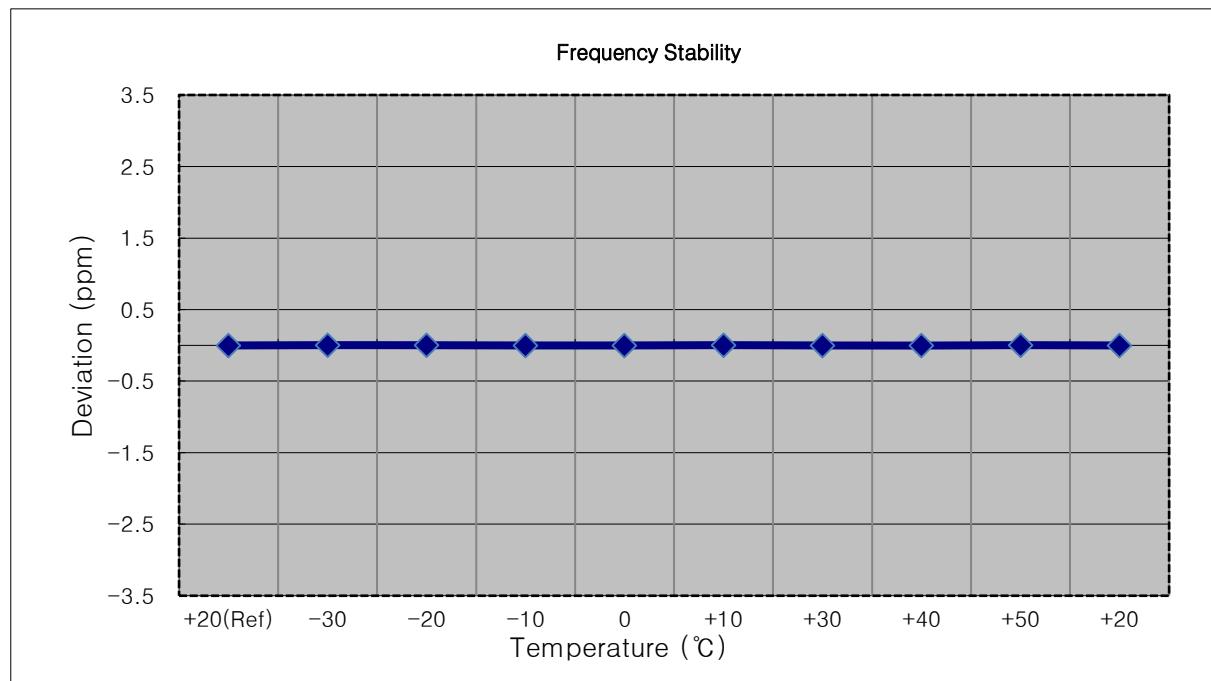


- MODE: LTE 66  
 OPERATING FREQUENCY: 1745,000,000 Hz  
 CHANNEL: 132322 (20 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1744 999 997	0.0	0.000 000	0.000
100 %		-30	1745 000 001	4.1	0.000 000	0.002
100 %		-20	1745 000 001	3.6	0.000 000	0.002
100 %		-10	1745 000 002	5.2	0.000 000	0.003
100 %		0	1745 000 000	2.6	0.000 000	0.001
100 %		+10	1745 000 000	2.6	0.000 000	0.001
100 %		+30	1744 999 995	-2.2	0.000 000	-0.001
100 %		+40	1745 000 000	3.0	0.000 000	0.002
100 %		+50	1745 000 001	3.7	0.000 000	0.002
Batt. Endpoint	3.300	+20	1745 000 001	3.7	0.000 000	0.002

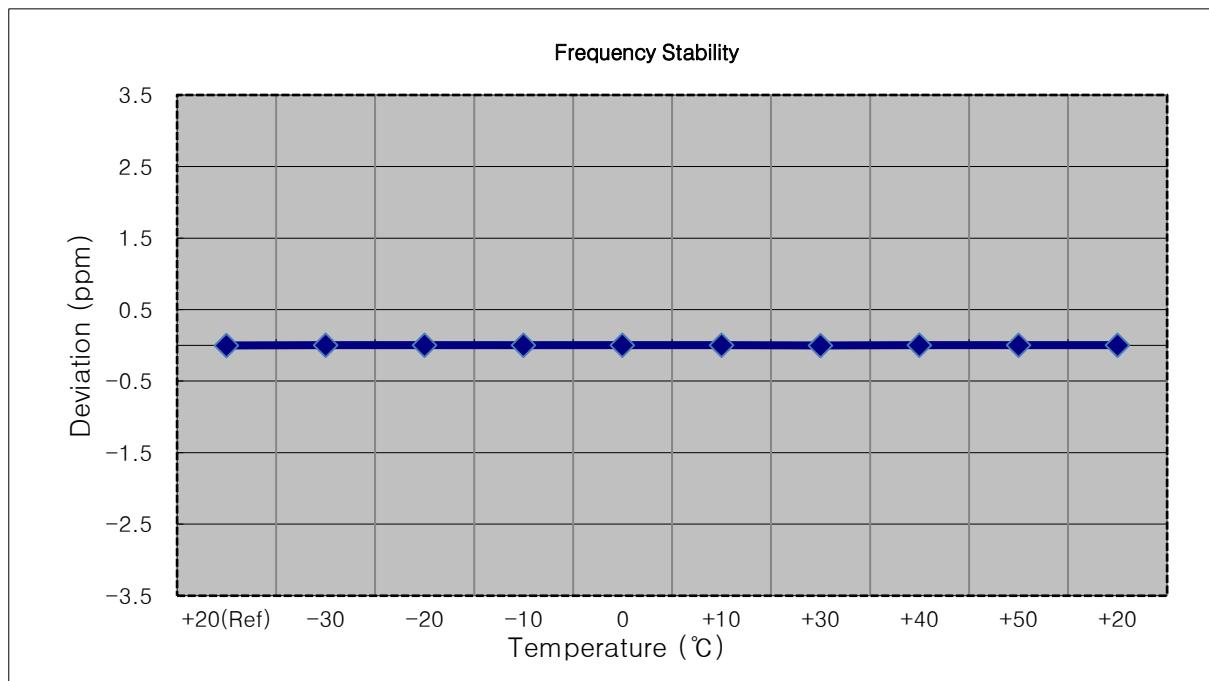


- MODE: LTE 66  
 OPERATING FREQUENCY: 1779,300,000 Hz  
 CHANNEL: 132665 (1.4 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1779 299 996	0.0	0.000 000	0.000
100 %		-30	1779 300 000	4.1	0.000 000	0.002
100 %		-20	1779 299 994	-2.5	0.000 000	-0.001
100 %		-10	1779 299 991	-4.9	0.000 000	-0.003
100 %		0	1779 300 000	3.9	0.000 000	0.002
100 %		+10	1779 300 000	4.1	0.000 000	0.002
100 %		+30	1779 300 000	3.6	0.000 000	0.002
100 %		+40	1779 299 994	-2.8	0.000 000	-0.002
100 %		+50	1779 299 999	2.3	0.000 000	0.001
Batt. Endpoint	3.300	+20	1779 299 993	-3.5	0.000 000	-0.002

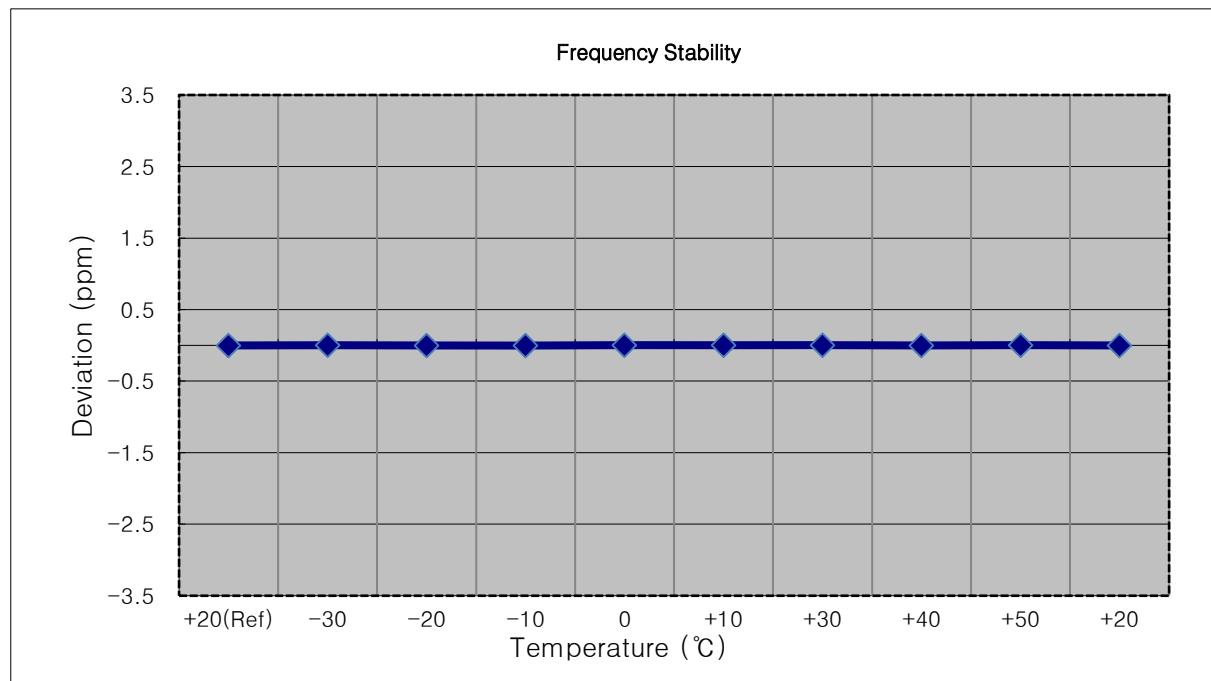


- MODE: LTE 66  
 OPERATING FREQUENCY: 1778,500,000 Hz  
 CHANNEL: 132657 (3 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1778 499 994	0.0	0.000 000	0.000
100 %		-30	1778 499 986	-8.2	0.000 000	-0.005
100 %		-20	1778 500 000	5.9	0.000 000	0.003
100 %		-10	1778 500 000	6.2	0.000 000	0.003
100 %		0	1778 499 987	-6.8	0.000 000	-0.004
100 %		+10	1778 500 000	5.8	0.000 000	0.003
100 %		+30	1778 499 999	5.7	0.000 000	0.003
100 %		+40	1778 500 001	7.5	0.000 000	0.004
100 %		+50	1778 500 000	5.8	0.000 000	0.003
Batt. Endpoint	3.300	+20	1778 499 999	4.8	0.000 000	0.003

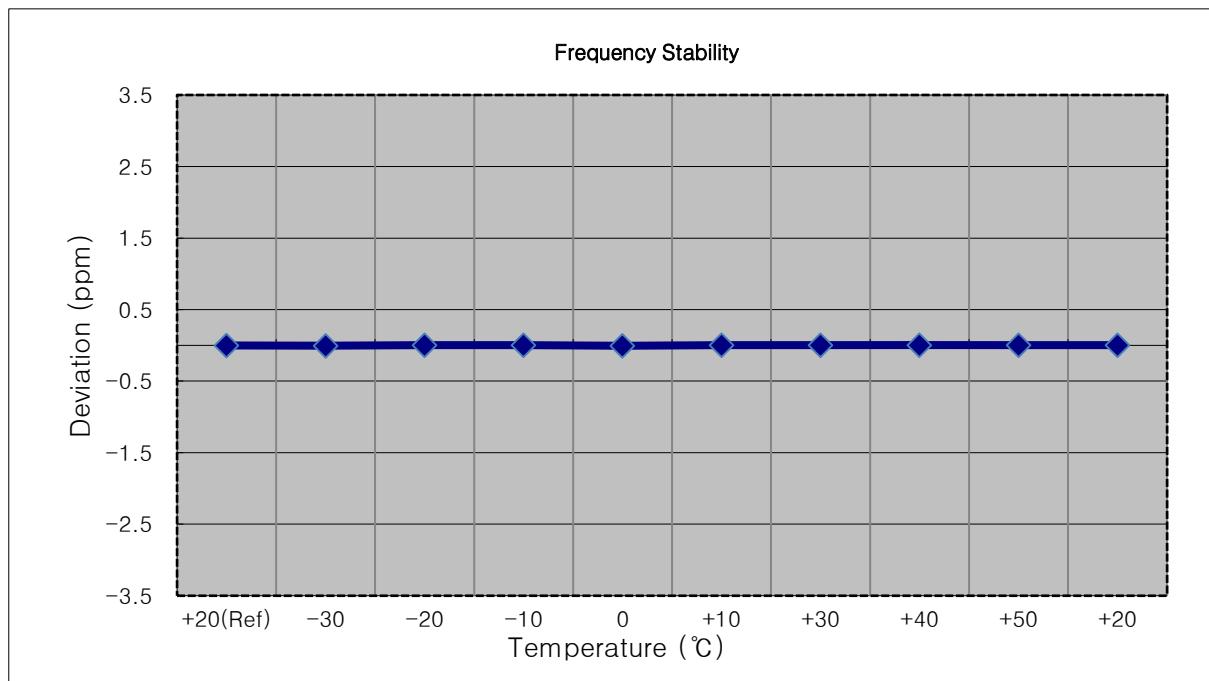


- MODE: LTE 66  
 OPERATING FREQUENCY: 1777,500,000 Hz  
 CHANNEL: 132647 (5 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1777 499 997	0.0	0.000 000	0.000
100 %		-30	1777 499 994	-2.7	0.000 000	-0.002
100 %		-20	1777 500 001	4.0	0.000 000	0.002
100 %		-10	1777 499 999	2.0	0.000 000	0.001
100 %		0	1777 499 993	-4.3	0.000 000	-0.002
100 %		+10	1777 499 995	-2.6	0.000 000	-0.001
100 %		+30	1777 499 992	-5.0	0.000 000	-0.003
100 %		+40	1777 500 001	3.5	0.000 000	0.002
100 %		+50	1777 499 995	-2.3	0.000 000	-0.001
Batt. Endpoint	3.300	+20	1777 499 992	-4.9	0.000 000	-0.003

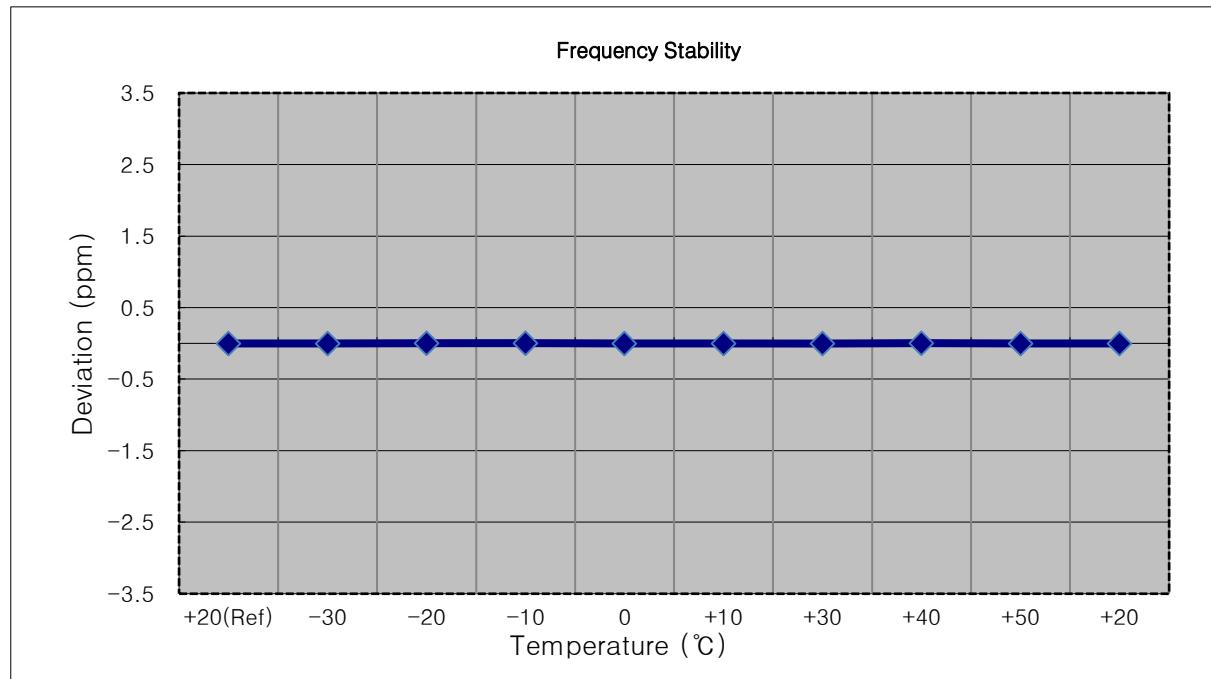


- MODE: LTE 66  
 OPERATING FREQUENCY: 1775,000,000 Hz  
 CHANNEL: 132622 (10 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1775 000 004	0.0	0.000 000	0.000
100 %		-30	1775 000 001	-3.1	0.000 000	-0.002
100 %		-20	1775 000 007	3.6	0.000 000	0.002
100 %		-10	1775 000 006	2.4	0.000 000	0.001
100 %		0	1775 000 006	2.8	0.000 000	0.002
100 %		+10	1775 000 006	2.6	0.000 000	0.001
100 %		+30	1775 000 001	-2.6	0.000 000	-0.001
100 %		+40	1775 000 007	3.1	0.000 000	0.002
100 %		+50	1775 000 002	-1.8	0.000 000	-0.001
Batt. Endpoint		3.300	+20	1775 000 006	2.3	0.000 000

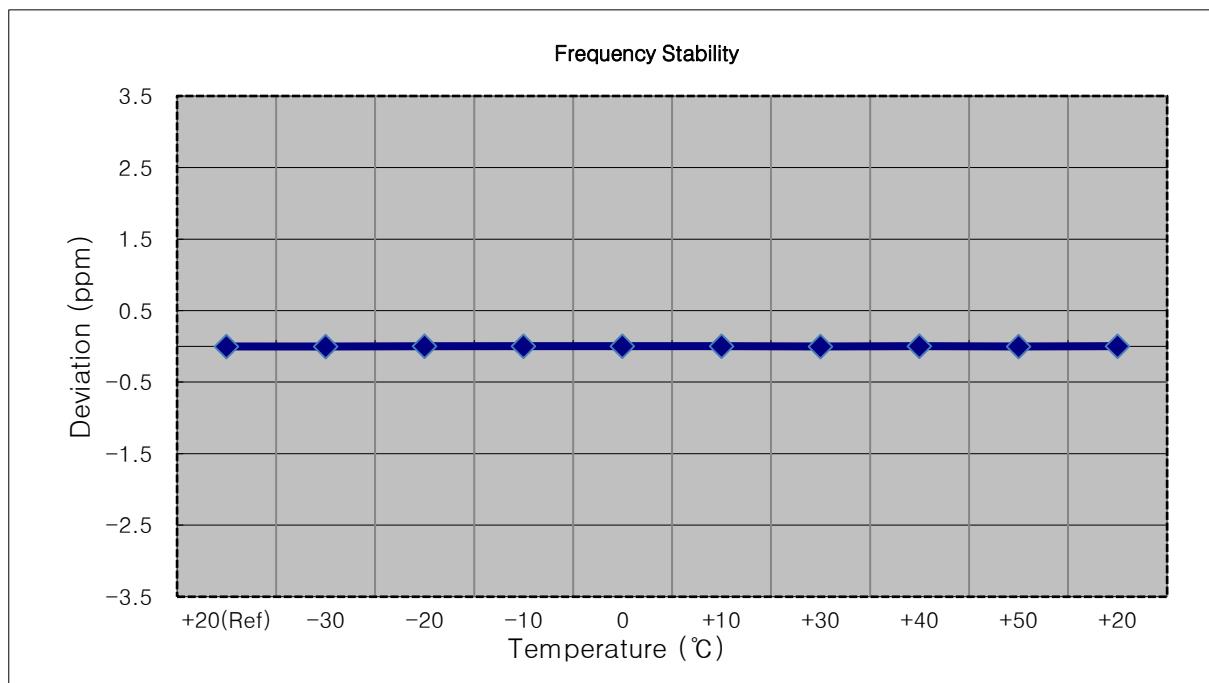


- MODE: LTE 66  
 OPERATING FREQUENCY: 1772,500,000 Hz  
 CHANNEL: 132597 (15 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1772 499 996	0.0	0.000 000	0.000
100 %		-30	1772 499 993	-2.5	0.000 000	-0.001
100 %		-20	1772 499 994	-1.9	0.000 000	-0.001
100 %		-10	1772 499 992	-3.7	0.000 000	-0.002
100 %		0	1772 499 998	2.3	0.000 000	0.001
100 %		+10	1772 499 999	3.2	0.000 000	0.002
100 %		+30	1772 499 999	2.6	0.000 000	0.001
100 %		+40	1772 499 998	2.0	0.000 000	0.001
100 %		+50	1772 499 999	2.8	0.000 000	0.002
Batt. Endpoint	3.300	+20	1772 499 999	3.3	0.000 000	0.002

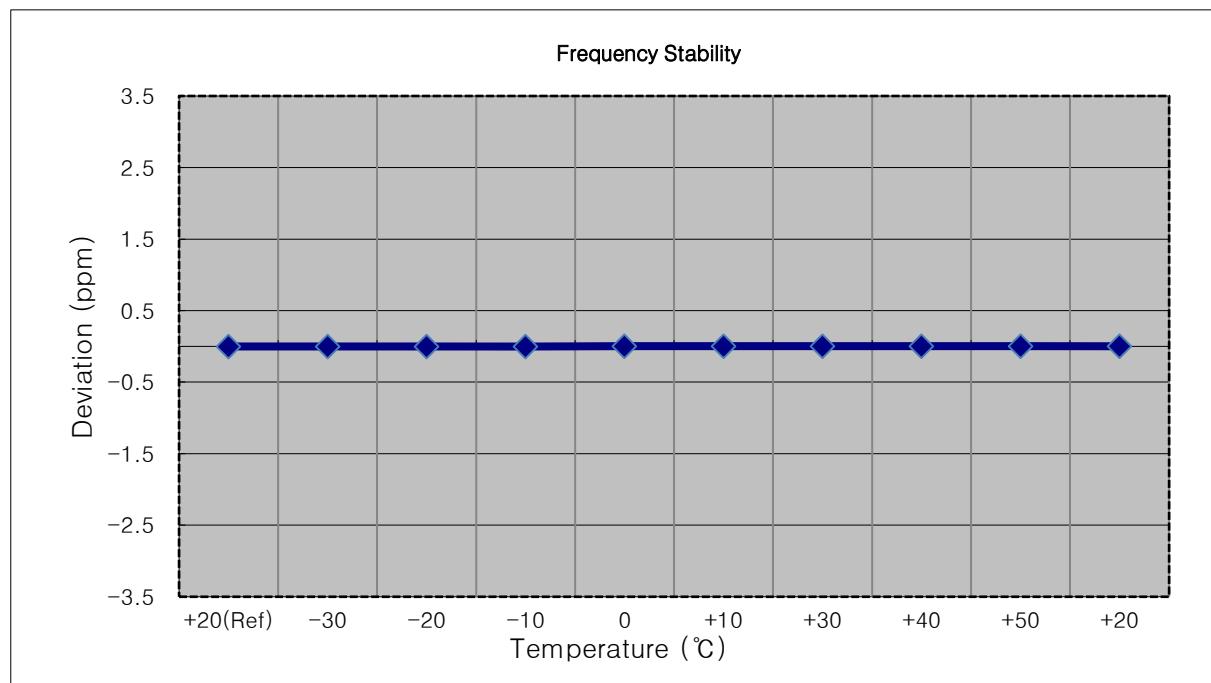

- MODE: LTE 66  
 OPERATING FREQUENCY: 1770,000,000 Hz  
 CHANNEL: 132572 (20 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1770 000 003	0.0	0.000 000	0.000
100 %		-30	1770 000 000	-2.6	0.000 000	-0.001
100 %		-20	1769 999 999	-4.0	0.000 000	-0.002
100 %		-10	1770 000 005	1.9	0.000 000	0.001
100 %		0	1770 000 006	3.2	0.000 000	0.002
100 %		+10	1770 000 006	3.5	0.000 000	0.002
100 %		+30	1770 000 005	2.4	0.000 000	0.001
100 %		+40	1770 000 000	-2.4	0.000 000	-0.001
100 %		+50	1770 000 000	-2.2	0.000 000	-0.001
Batt. Endpoint	3.300	+20	1770 000 007	4.7	0.000 000	0.003

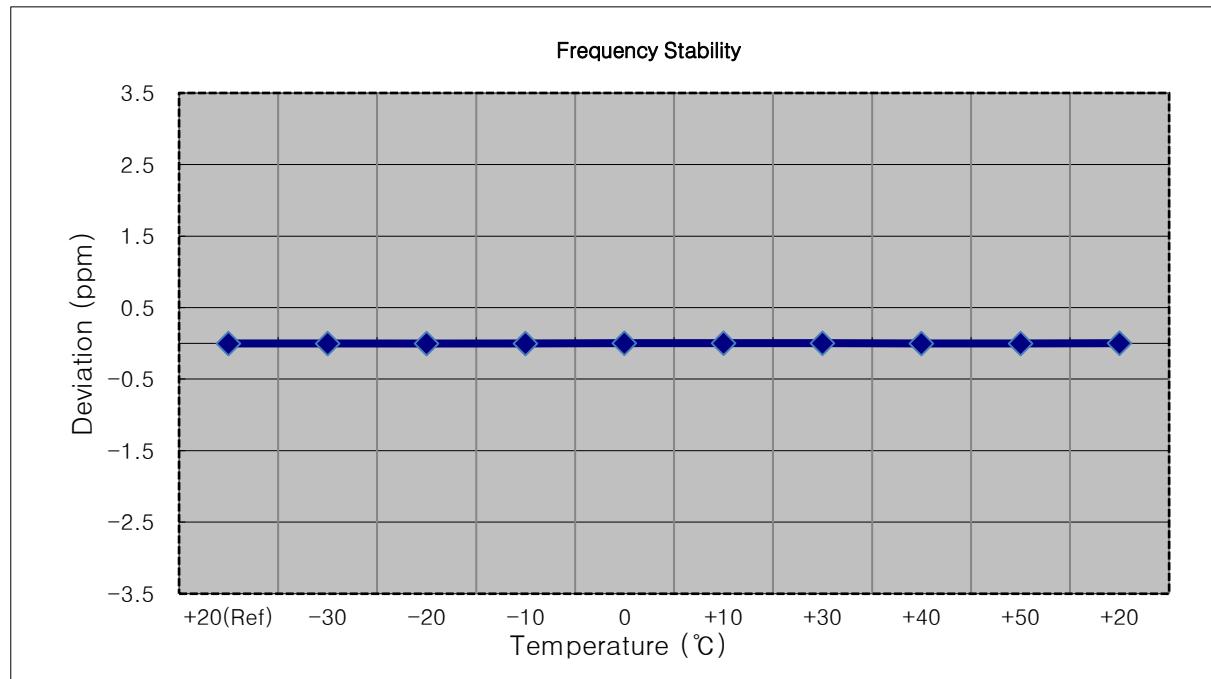

## 9. TEST DATA(Main 1 Ant)

### 9.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		
									W	W	dBm
1710.7	LTE B66 1.4 MHz	QPSK	-20.71	13.02	9.94	2.24	H	< 1.00	0.118	20.72	
		16-QAM	-21.52	12.21	9.94	2.24	H		0.098	19.91	
		64-QAM	-22.56	11.17	9.94	2.24	H		0.077	18.87	
		256-QAM	-25.56	8.17	9.94	2.24	H		0.039	15.87	
		QPSK	-20.40	13.28	10.15	2.15	H		0.134	21.28	
		16-QAM	-21.20	12.48	10.15	2.15	H		0.112	20.48	
		64-QAM	-22.29	11.39	10.15	2.15	H		0.087	19.39	
		256-QAM	-25.27	8.41	10.15	2.15	H		0.044	16.41	
		QPSK	-21.30	12.39	10.21	2.26	H		0.108	20.34	
		16-QAM	-22.04	11.65	10.21	2.26	H		0.091	19.60	
		64-QAM	-23.20	10.49	10.21	2.26	H		0.070	18.44	
		256-QAM	-26.12	7.57	10.21	2.26	H		0.036	15.52	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		
									W	W	dBm
1711.5	LTE B66 3 MHz	QPSK	-20.66	13.07	9.94	2.24	H	< 1.00	0.119	20.77	
		16-QAM	-21.42	12.31	9.94	2.24	H		0.100	20.01	
		64-QAM	-22.41	11.32	9.94	2.24	H		0.080	19.02	
		256-QAM	-25.47	8.26	9.94	2.24	H		0.039	15.96	
		QPSK	-20.40	13.28	10.15	2.15	H		0.134	21.28	
		16-QAM	-21.21	12.47	10.15	2.15	H		0.111	20.47	
		64-QAM	-22.26	11.42	10.15	2.15	H		0.087	19.42	
		256-QAM	-25.25	8.43	10.15	2.15	H		0.044	16.43	
		QPSK	-21.25	12.44	10.21	2.26	H		0.109	20.39	
		16-QAM	-22.05	11.64	10.21	2.26	H		0.091	19.59	
		64-QAM	-23.07	10.62	10.21	2.26	H		0.072	18.57	
		256-QAM	-26.11	7.58	10.21	2.26	H		0.036	15.53	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		
									W	W	dBm
1712.5	LTE B66 5 MHz	QPSK	-20.52	13.21	9.94	2.24	H	< 1.00	0.123	20.91	
		16-QAM	-21.31	12.42	9.94	2.24	H		0.103	20.12	
		64-QAM	-22.35	11.38	9.94	2.24	H		0.081	19.08	
		256-QAM	-25.33	8.40	9.94	2.24	H		0.041	16.10	
		QPSK	-20.48	13.20	10.15	2.15	H		0.132	21.20	
		16-QAM	-21.27	12.41	10.15	2.15	H		0.110	20.41	
		64-QAM	-22.31	11.37	10.15	2.15	H		0.086	19.37	
		256-QAM	-25.29	8.39	10.15	2.15	H		0.044	16.39	
		QPSK	-21.29	12.40	10.21	2.26	H		0.108	20.35	
		16-QAM	-22.04	11.65	10.21	2.26	H		0.091	19.60	
1745.0		64-QAM	-23.03	10.66	10.21	2.26	H		0.073	18.61	
		256-QAM	-26.02	7.67	10.21	2.26	H		0.036	15.62	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		
									W	W	dBm
1715.0	LTE B66 10 MHz	QPSK	-20.53	13.11	9.98	2.23	H	< 1.00	0.122	20.85	
		16-QAM	-21.29	12.35	9.98	2.23	H		0.102	20.09	
		64-QAM	-22.28	11.36	9.98	2.23	H		0.081	19.10	
		256-QAM	-25.36	8.28	9.98	2.23	H		0.040	16.02	
		QPSK	-20.43	13.25	10.15	2.15	H		0.133	21.25	
		16-QAM	-21.25	12.43	10.15	2.15	H		0.110	20.43	
		64-QAM	-22.23	11.45	10.15	2.15	H		0.088	19.45	
		256-QAM	-25.29	8.39	10.15	2.15	H		0.044	16.39	
		QPSK	-21.21	12.44	10.21	2.25	H		0.110	20.40	
		16-QAM	-22.07	11.58	10.21	2.25	H		0.090	19.54	
1745.0		64-QAM	-23.05	10.60	10.21	2.25	H		0.072	18.56	
		256-QAM	-25.98	7.67	10.21	2.25	H		0.037	15.63	
1775.0											

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		
									W	W	dBm
1717.5	LTE B66 15 MHz	QPSK	-20.39	13.25	10.01	2.22	H	< 1.00	0.127	21.04	
		16-QAM	-21.19	12.45	10.01	2.22	H		0.106	20.24	
		64-QAM	-22.17	11.47	10.01	2.22	H		0.084	19.26	
		256-QAM	-25.16	8.48	10.01	2.22	H		0.042	16.27	
		QPSK	-20.28	13.40	10.15	2.15	H		0.138	21.40	
		16-QAM	-21.04	12.64	10.15	2.15	H		0.116	20.64	
		64-QAM	-22.07	11.61	10.15	2.15	H		0.091	19.61	
		256-QAM	-25.02	8.66	10.15	2.15	H		0.046	16.66	
		QPSK	-21.12	12.49	10.20	2.23	H		0.111	20.46	
		16-QAM	-21.90	11.71	10.20	2.23	H		0.093	19.68	
		64-QAM	-22.92	10.69	10.20	2.23	H		0.073	18.66	
		256-QAM	-25.87	7.74	10.20	2.23	H		0.037	15.71	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		
									W	W	dBm
1720.0	LTE B66 20 MHz	QPSK	-20.62	12.89	10.01	2.22	H	< 1.00	0.117	20.68	
		16-QAM	-21.44	12.07	10.01	2.22	H		0.097	19.86	
		64-QAM	-22.37	11.14	10.01	2.22	H		0.078	18.93	
		256-QAM	-25.44	8.07	10.01	2.22	H		0.039	15.86	
		QPSK	-20.50	13.18	10.15	2.15	H		0.131	21.18	
		16-QAM	-21.32	12.36	10.15	2.15	H		0.109	20.36	
		64-QAM	-22.30	11.38	10.15	2.15	H		0.087	19.38	
		256-QAM	-25.29	8.39	10.15	2.15	H		0.044	16.39	
		QPSK	-21.06	12.55	10.20	2.23	H		0.113	20.52	
		16-QAM	-21.89	11.72	10.20	2.23	H		0.093	19.69	
		64-QAM	-22.89	10.72	10.20	2.23	H		0.074	18.69	
		256-QAM	-25.88	7.73	10.20	2.23	H		0.037	15.70	

## 9.2 RADIATED SPURIOUS EMISSIONS

OPERATING FREQUENCY: 1745.0 MHz  
 MEASURED OUTPUT POWER: 21.40 dBm = 0.138 W  
 MODE: LTE B66  
 MODULATION SIGNAL: 15 MHz QPSK  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  34.40 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
132047 (1717.5)	3 435.00	-54.04	12.41	-60.32	3.12	V	-51.03	72.43
	5 152.50	-46.80	12.39	-44.78	3.84	V	-36.23	57.64
	6 870.00	-56.72	11.85	-49.66	4.50	H	-42.31	63.71
132322 (1745.0)	3 490.00	-54.81	12.34	-60.82	3.08	H	-51.56	72.97
	5 235.00	-46.04	12.84	-45.12	3.95	V	-36.23	57.64
	6 980.00	-57.20	11.40	-49.59	4.56	V	-42.75	64.16
132597 (1772.5)	3 545.00	-53.12	12.34	-58.77	3.21	V	-49.63	71.04
	5 317.50	-43.17	13.08	-42.58	3.96	V	-33.46	54.86
	7 090.00	-57.04	10.91	-47.86	4.59	V	-41.54	62.94

### 9.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)		
66	1.4 MHz	1745.0	QPSK	6	0	5.85		
			16-QAM			6.50		
			64-QAM			6.75		
			256-QAM			6.74		
	3 MHz		QPSK	15		5.89		
			16-QAM			6.50		
			64-QAM			6.63		
			256-QAM			6.59		
	5 MHz		QPSK	25		5.83		
			16-QAM			6.52		
			64-QAM			6.70		
			256-QAM			6.59		
	10 MHz		QPSK	50		5.93		
			16-QAM			6.48		
			64-QAM			6.70		
			256-QAM			6.58		
	15 MHz		QPSK	75		5.79		
			16-QAM			6.42		
			64-QAM			6.63		
			256-QAM			6.58		
	20 MHz		QPSK	100		5.77		
			16-QAM			6.47		
			64-QAM			6.66		
			256-QAM			6.59		

**Note:**

- Plots of the EUT's Peak- to- Average Ratio are shown Page 261 ~ 284.

#### 9.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)		
66	1.4 MHz	1745.0	QPSK	6	0	1.0965		
			16-QAM			1.0943		
			64-QAM			1.0982		
			256-QAM			1.0968		
	3 MHz		QPSK	15		2.7201		
			16-QAM			2.7130		
			64-QAM			2.7173		
			256-QAM			2.7116		
	5 MHz		QPSK	25		4.5218		
			16-QAM			4.5335		
			64-QAM			4.5402		
			256-QAM			4.5221		
	10 MHz		QPSK	50		9.0115		
			16-QAM			8.9994		
			64-QAM			9.0173		
			256-QAM			9.0151		
	15 MHz		QPSK	75		13.476		
			16-QAM			13.477		
			64-QAM			13.489		
			256-QAM			13.455		
	20 MHz		QPSK	100		17.960		
			16-QAM			17.926		
			64-QAM			17.927		
			256-QAM			17.953		

**Note:**

- Plots of the EUT's Occupied Bandwidth are shown Page 237 ~ 260.

## 9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
66	1.4	1710.7	3.4208	27.976	-75.135	-47.159	-13.00
		1745.0	3.4896	27.976	-75.982	-48.006	
		1779.3	3.5604	27.976	-76.463	-48.487	
	3	1711.5	3.4213	27.976	-75.289	-47.313	
		1745.0	3.4881	27.976	-75.810	-47.834	
		1778.5	3.5599	27.976	-75.551	-47.575	
	5	1712.5	3.4213	27.976	-75.114	-47.138	
		1745.0	3.4866	27.976	-76.316	-48.340	
		1777.5	3.5599	27.976	-76.635	-48.659	
	10	1715.0	3.4218	27.976	-75.765	-47.789	
		1745.0	3.4816	27.976	-76.647	-48.671	
		1775.0	3.5594	27.976	-75.723	-47.747	
	15	1717.5	3.4223	27.976	-74.765	-46.789	
		1745.0	3.4771	27.976	-75.383	-47.407	
		1772.5	3.5589	27.976	-75.146	-47.170	
	20	1720.0	3.4228	27.976	-75.858	-47.882	
		1745.0	3.4726	27.976	-76.061	-48.085	
		1770.0	3.5584	27.976	-76.415	-48.439	

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 285 ~ 320.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


## **9.6 BAND EDGE**

- Plots of the EUT's Band Edge are shown Page 201 ~ 236.

## 9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- MODE: LTE 66
- OPERATING FREQUENCY: 1710,700,000 Hz
- CHANNEL: 131979 (1.4 MHz)
- REFERENCE VOLTAGE: 3.880 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1710 699 996	0.0	0.000 000	0.000
100 %		-30	1710 699 999	2.5	0.000 000	0.001
100 %		-20	1710 699 998	1.8	0.000 000	0.001
100 %		-10	1710 700 000	4.0	0.000 000	0.002
100 %		0	1710 699 999	2.9	0.000 000	0.002
100 %		+10	1710 699 998	1.9	0.000 000	0.001
100 %		+30	1710 700 002	5.3	0.000 000	0.003
100 %		+40	1710 699 998	2.0	0.000 000	0.001
100 %		+50	1710 699 993	-3.5	0.000 000	-0.002
Batt. Endpoint	3.300	+20	1710 699 999	3.1	0.000 000	0.002

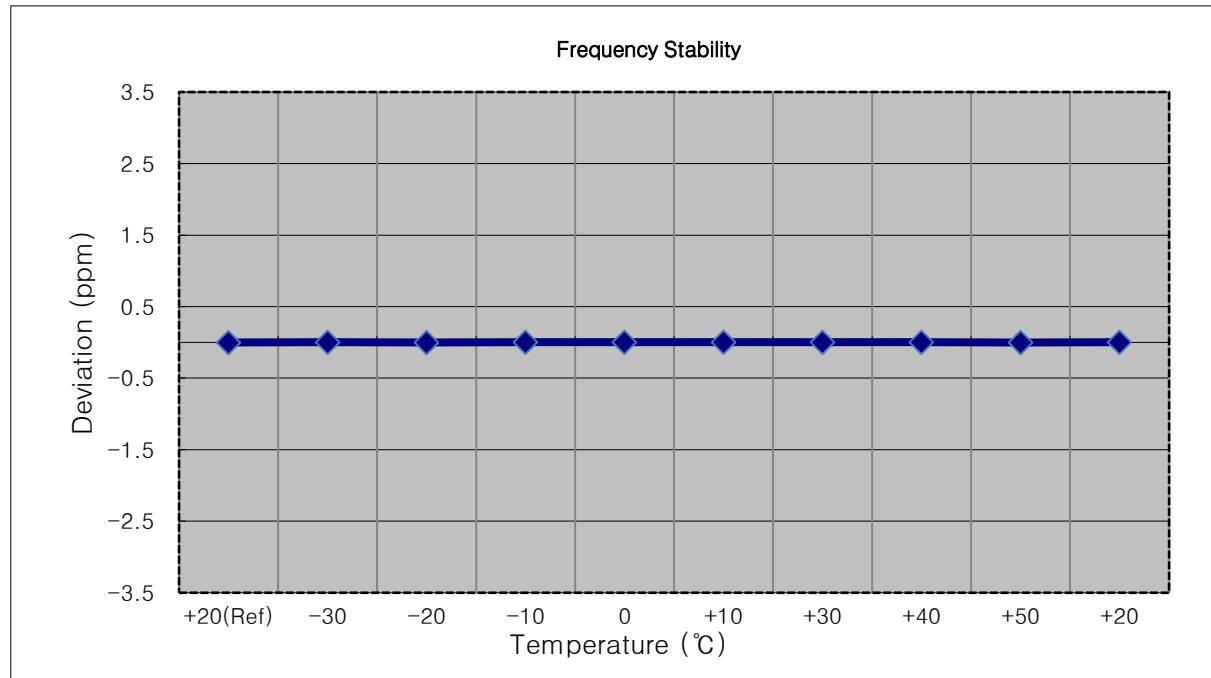


- MODE: LTE 66  
 OPERATING FREQUENCY: 1711,500,000 Hz  
 CHANNEL: 131987 (3 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1711 499 996	0.0	0.000 000	0.000
100 %		-30	1711 499 992	-4.7	0.000 000	-0.003
100 %		-20	1711 499 994	-2.5	0.000 000	-0.001
100 %		-10	1711 500 000	3.2	0.000 000	0.002
100 %		0	1711 499 994	-2.7	0.000 000	-0.002
100 %		+10	1711 499 994	-1.9	0.000 000	-0.001
100 %		+30	1711 499 998	1.6	0.000 000	0.001
100 %		+40	1711 499 998	1.8	0.000 000	0.001
100 %		+50	1711 499 994	-2.0	0.000 000	-0.001
Batt. Endpoint	3.300	+20	1711 500 002	5.5	0.000 000	0.003

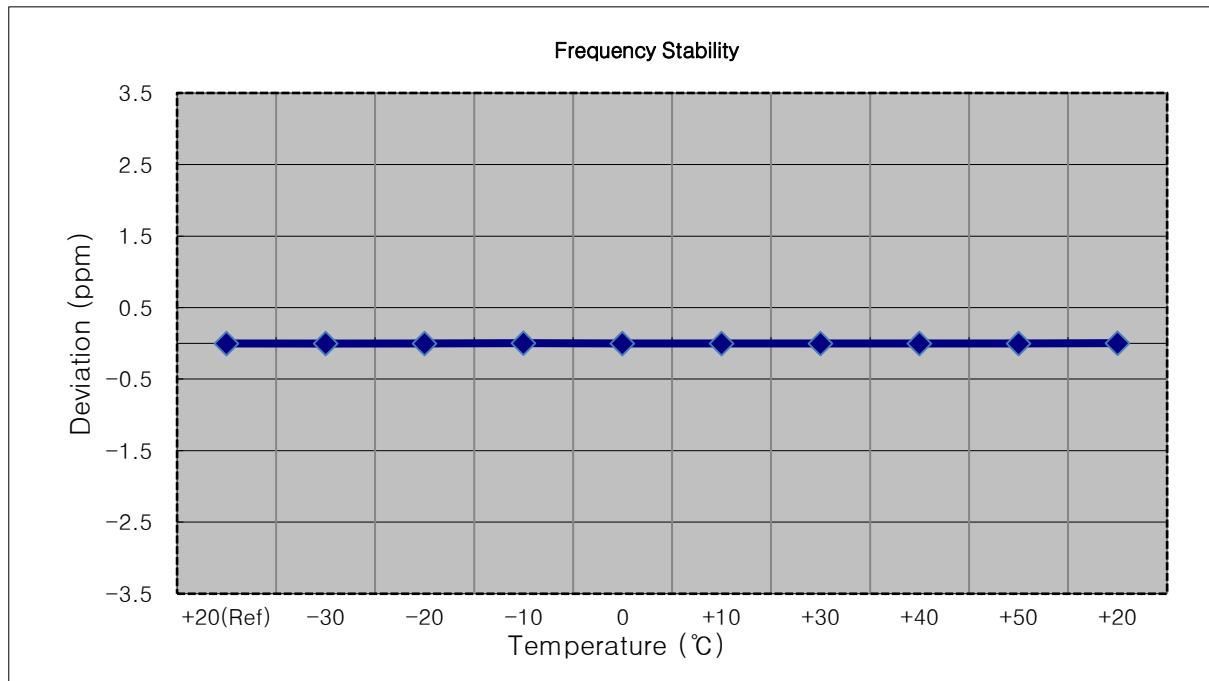


- MODE: LTE 66  
 OPERATING FREQUENCY: 1712,500,000 Hz  
 CHANNEL: 131997 (5 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1712 500 003	0.0	0.000 000	0.000
100 %		-30	1712 500 004	1.0	0.000 000	0.001
100 %		-20	1712 500 008	4.9	0.000 000	0.003
100 %		-10	1712 500 005	1.8	0.000 000	0.001
100 %		0	1712 500 000	-2.9	0.000 000	-0.002
100 %		+10	1712 500 001	-2.1	0.000 000	-0.001
100 %		+30	1712 500 005	1.7	0.000 000	0.001
100 %		+40	1712 500 002	-1.6	0.000 000	-0.001
100 %		+50	1712 499 999	-4.3	0.000 000	-0.003
Batt. Endpoint	3.300	+20	1712 499 999	-4.0	0.000 000	-0.002

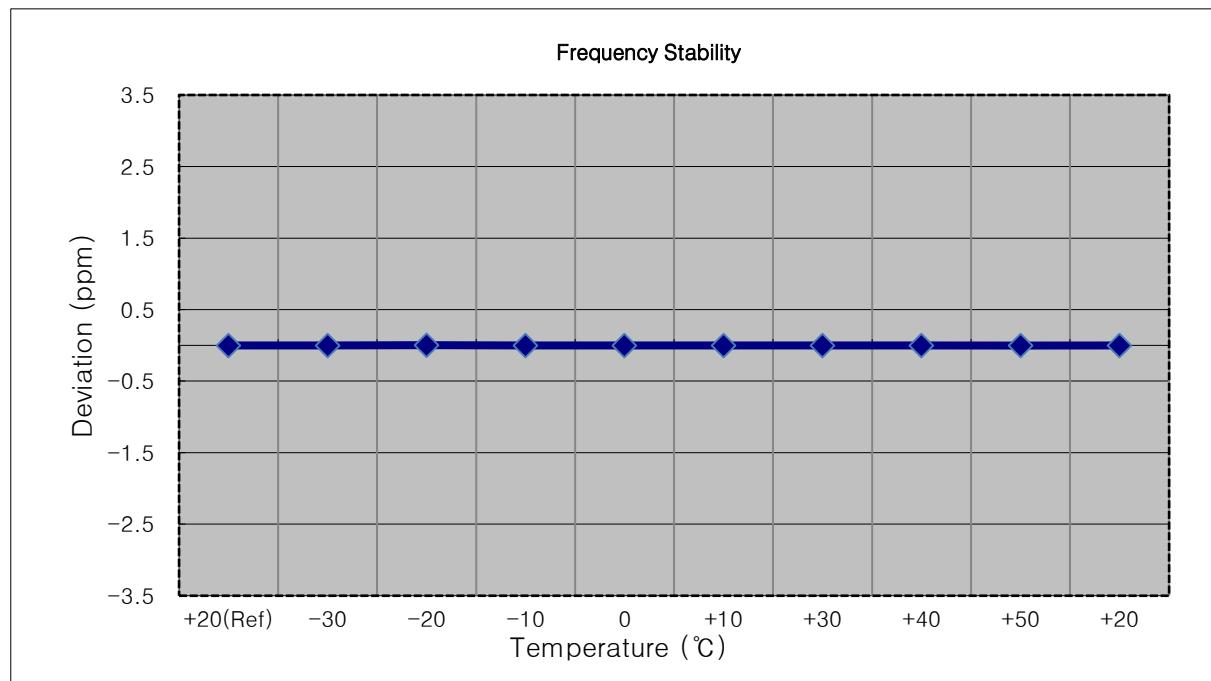


- MODE: LTE 66  
 OPERATING FREQUENCY: 1715,000,000 Hz  
 CHANNEL: 132022 (10 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1714 999 996	0.0	0.000 000	0.000
100 %		-30	1714 999 994	-2.2	0.000 000	-0.001
100 %		-20	1714 999 999	2.6	0.000 000	0.002
100 %		-10	1714 999 998	2.1	0.000 000	0.001
100 %		0	1715 000 002	5.9	0.000 000	0.003
100 %		+10	1714 999 999	2.8	0.000 000	0.002
100 %		+30	1715 000 000	3.5	0.000 000	0.002
100 %		+40	1714 999 994	-2.4	0.000 000	-0.001
100 %		+50	1714 999 999	2.2	0.000 000	0.001
Batt. Endpoint	3.300	+20	1715 000 001	4.9	0.000 000	0.003

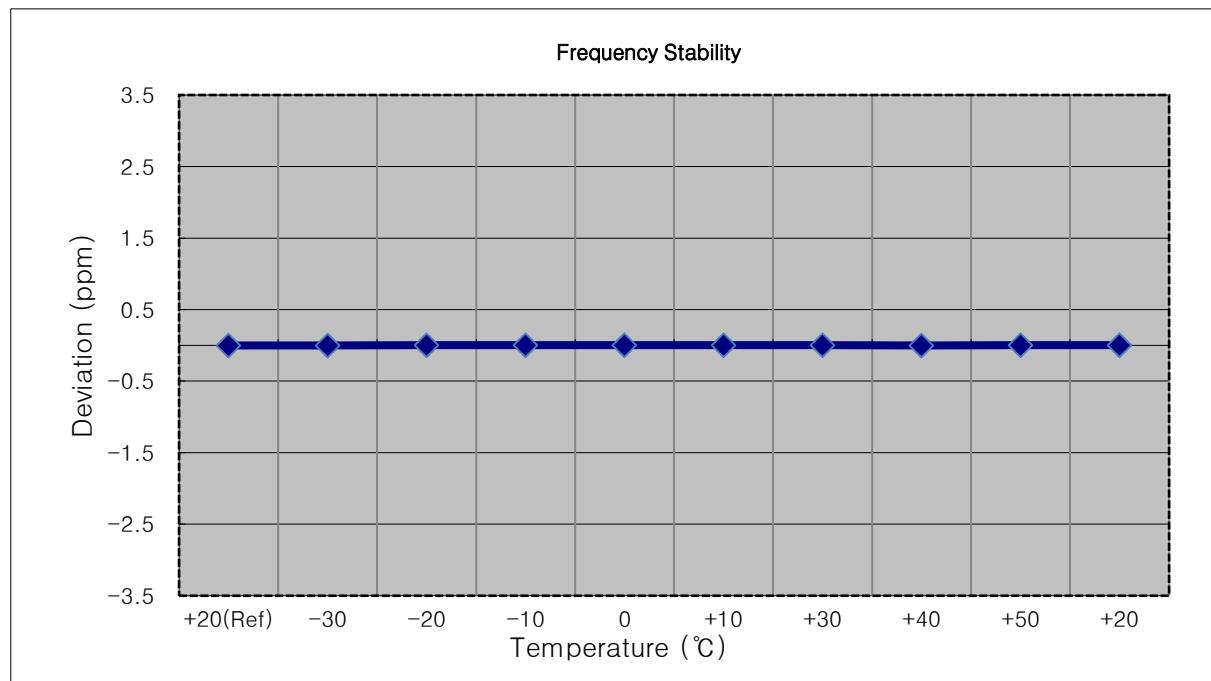


- MODE: LTE 66  
 OPERATING FREQUENCY: 1717,500,000 Hz  
 CHANNEL: 132047 (15 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1717 499 997	0.0	0.000 000	0.000
100 %		-30	1717 499 999	1.7	0.000 000	0.001
100 %		-20	1717 499 996	-1.7	0.000 000	-0.001
100 %		-10	1717 499 999	1.3	0.000 000	0.001
100 %		0	1717 499 995	-1.9	0.000 000	-0.001
100 %		+10	1717 499 999	1.6	0.000 000	0.001
100 %		+30	1717 499 995	-2.4	0.000 000	-0.001
100 %		+40	1717 499 999	1.6	0.000 000	0.001
100 %		+50	1717 500 000	2.6	0.000 000	0.002
Batt. Endpoint	3.300	+20	1717 499 994	-3.6	0.000 000	-0.002

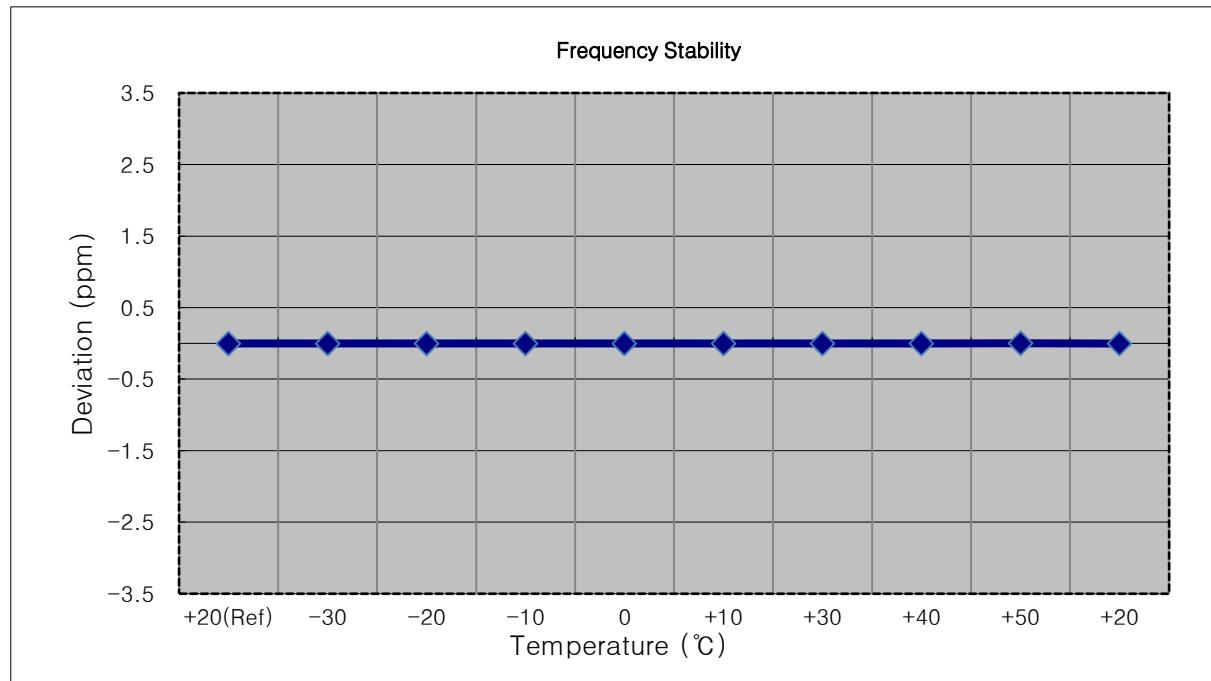


- MODE: LTE 66  
 OPERATING FREQUENCY: 1720,000,000 Hz  
 CHANNEL: 132072 (20 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1720 000 001	0.0	0.000 000	0.000
100 %		-30	1719 999 999	-2.2	0.000 000	-0.001
100 %		-20	1720 000 003	1.5	0.000 000	0.001
100 %		-10	1720 000 004	2.6	0.000 000	0.002
100 %		0	1720 000 003	1.7	0.000 000	0.001
100 %		+10	1719 999 998	-3.2	0.000 000	-0.002
100 %		+30	1720 000 004	2.2	0.000 000	0.001
100 %		+40	1720 000 000	-1.5	0.000 000	-0.001
100 %		+50	1719 999 999	-2.4	0.000 000	-0.001
Batt. Endpoint	3.300	+20	1720 000 007	5.2	0.000 000	0.003

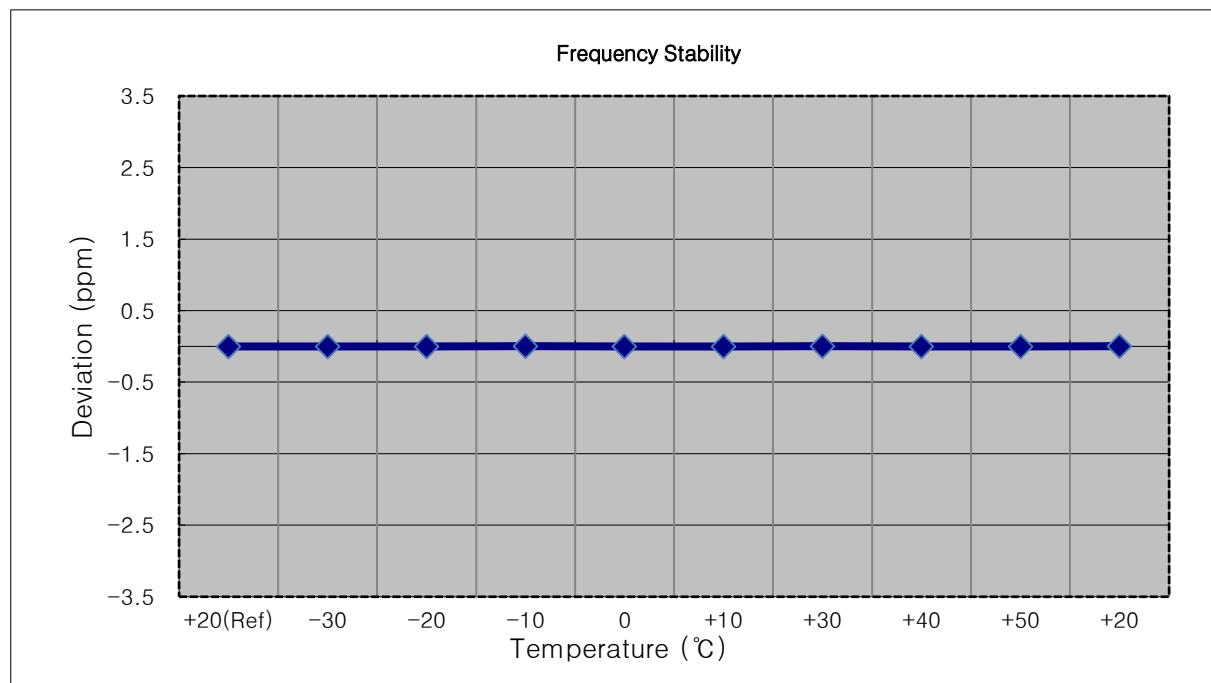


- MODE: LTE 66  
 OPERATING FREQUENCY: 1745,000,000 Hz  
 CHANNEL: 132322 (1.4 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 003	0.0	0.000 000	0.000
100 %		-30	1745 000 001	-2.5	0.000 000	-0.001
100 %		-20	1745 000 005	1.8	0.000 000	0.001
100 %		-10	1745 000 008	5.1	0.000 000	0.003
100 %		0	1745 000 005	2.0	0.000 000	0.001
100 %		+10	1745 000 006	3.2	0.000 000	0.002
100 %		+30	1745 000 008	4.6	0.000 000	0.003
100 %		+40	1745 000 006	2.9	0.000 000	0.002
100 %		+50	1745 000 005	1.6	0.000 000	0.001
Batt. Endpoint	3.300	+20	1745 000 008	4.4	0.000 000	0.003

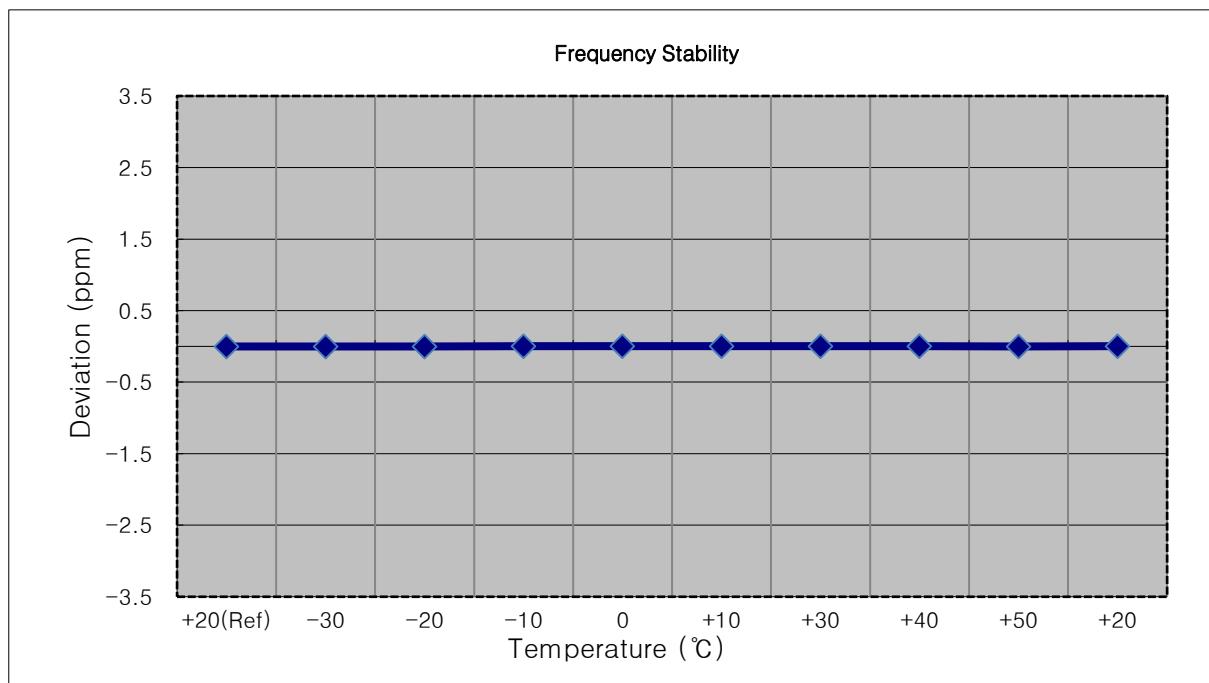


- MODE: LTE 66  
 OPERATING FREQUENCY: 1745,000,000 Hz  
 CHANNEL: 132322 (3 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 004	0.0	0.000 000	0.000
100 %		-30	1745 000 006	2.9	0.000 000	0.002
100 %		-20	1745 000 005	1.9	0.000 000	0.001
100 %		-10	1745 000 008	4.5	0.000 000	0.003
100 %		0	1745 000 007	3.6	0.000 000	0.002
100 %		+10	1745 000 008	4.7	0.000 000	0.003
100 %		+30	1745 000 009	5.1	0.000 000	0.003
100 %		+40	1745 000 007	3.0	0.000 000	0.002
100 %		+50	1745 000 001	-2.4	0.000 000	-0.001
Batt. Endpoint	3.300	+20	1745 000 006	2.2	0.000 000	0.001

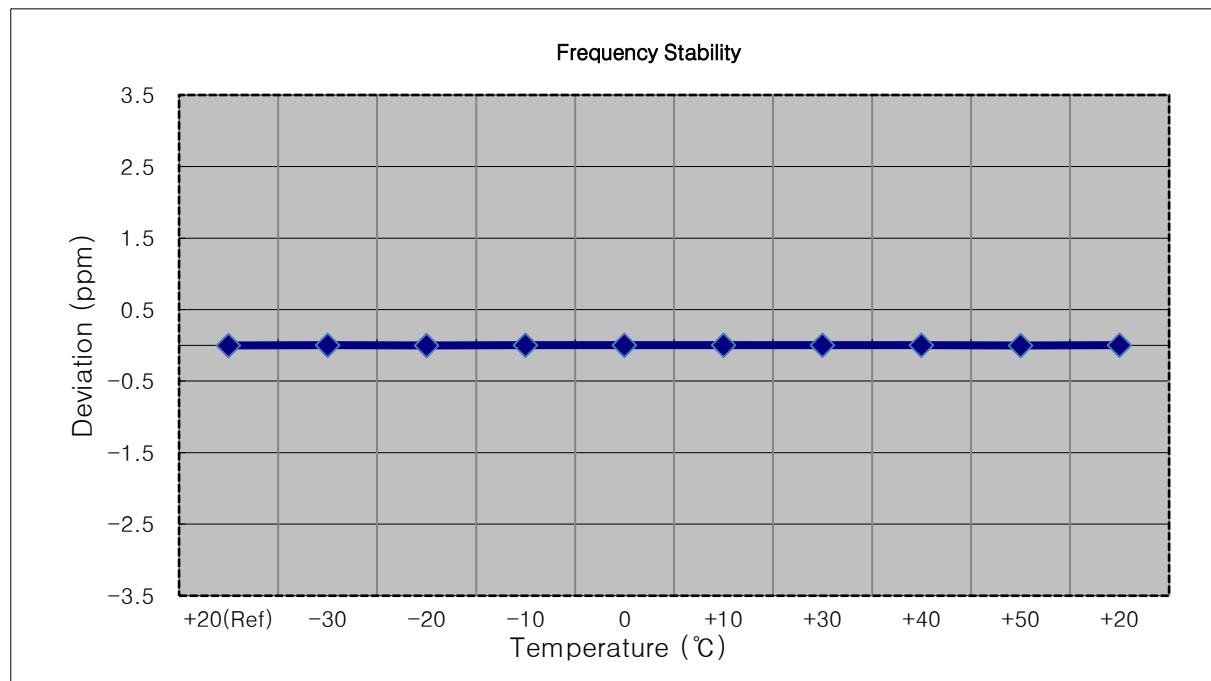


- MODE: LTE 66  
 OPERATING FREQUENCY: 1745,000,000 Hz  
 CHANNEL: 132322 (5 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1744 999 997	0.0	0.000 000	0.000
100 %		-30	1744 999 999	1.6	0.000 000	0.001
100 %		-20	1745 000 000	2.6	0.000 000	0.001
100 %		-10	1744 999 995	-2.7	0.000 000	-0.002
100 %		0	1744 999 998	0.8	0.000 000	0.000
100 %		+10	1745 000 000	3.0	0.000 000	0.002
100 %		+30	1744 999 996	-1.4	0.000 000	-0.001
100 %		+40	1744 999 994	-2.9	0.000 000	-0.002
100 %		+50	1745 000 003	5.5	0.000 000	0.003
Batt. Endpoint	3.300	+20	1744 999 994	-3.2	0.000 000	-0.002

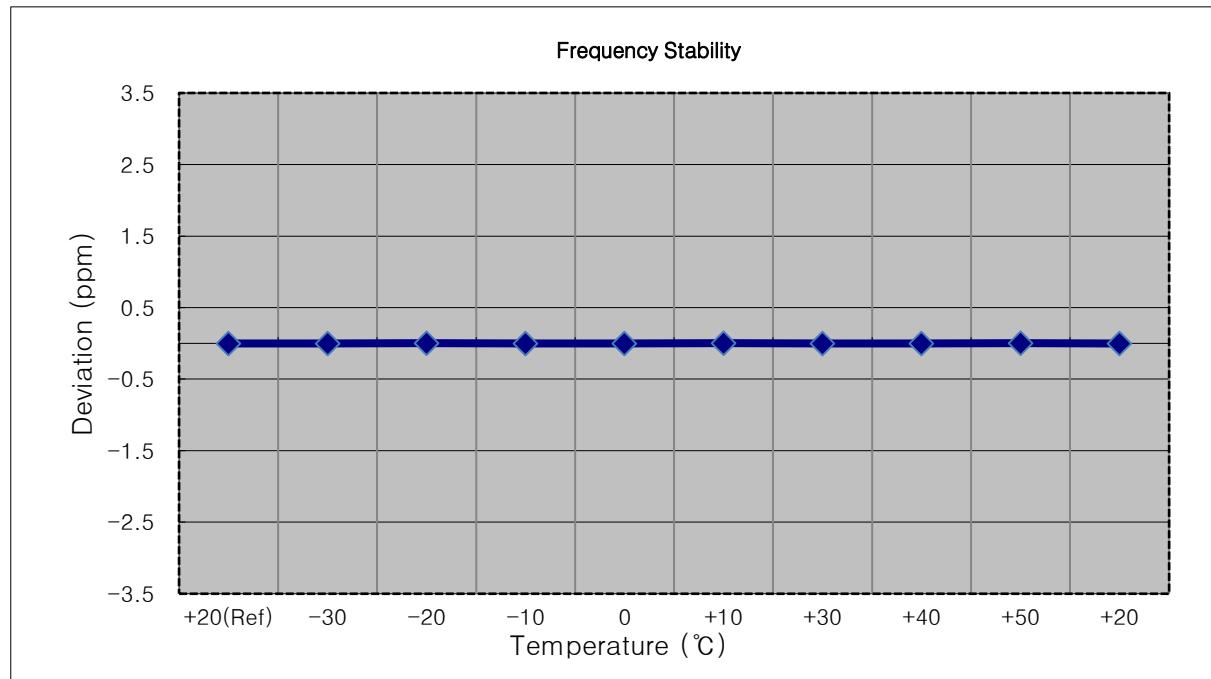


- MODE: LTE 66  
 OPERATING FREQUENCY: 1745,000,000 Hz  
 CHANNEL: 132322 (10 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 001	0.0	0.000 000	0.000
100 %		-30	1745 000 006	4.5	0.000 000	0.003
100 %		-20	1745 000 000	-1.4	0.000 000	-0.001
100 %		-10	1745 000 003	2.0	0.000 000	0.001
100 %		0	1745 000 003	1.4	0.000 000	0.001
100 %		+10	1745 000 005	3.7	0.000 000	0.002
100 %		+30	1745 000 005	3.7	0.000 000	0.002
100 %		+40	1745 000 005	3.2	0.000 000	0.002
100 %		+50	1745 000 000	-1.7	0.000 000	-0.001
Batt. Endpoint	3.300	+20	1744 999 999	-2.5	0.000 000	-0.001

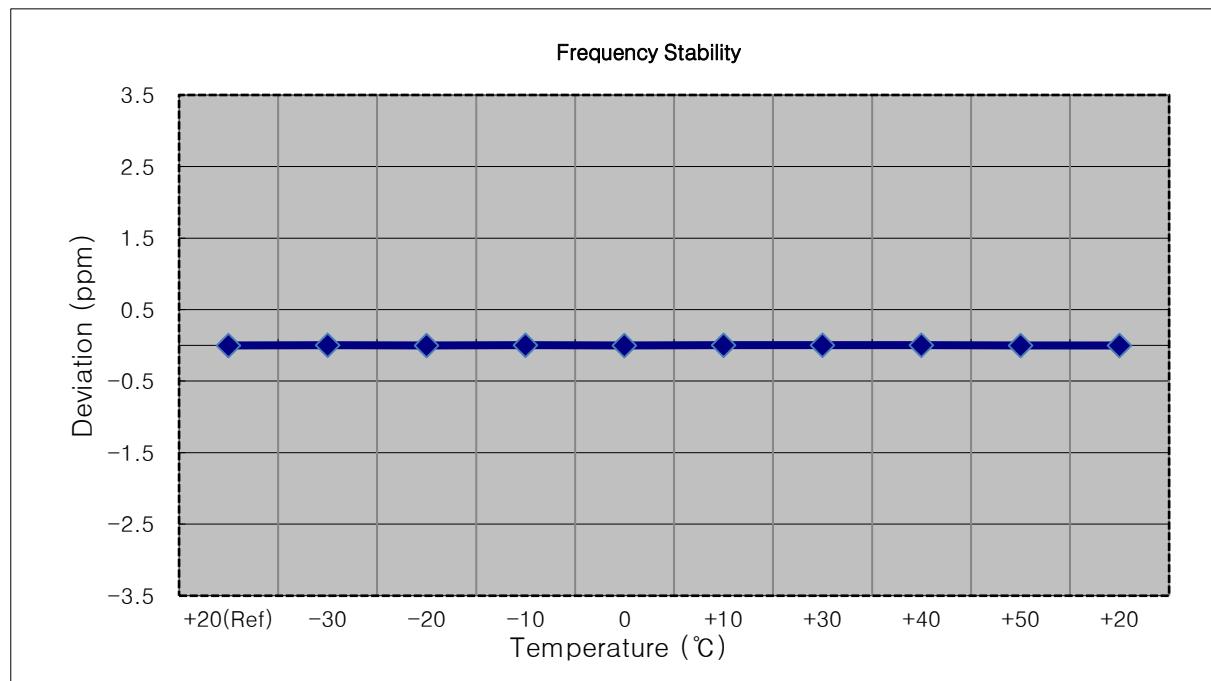


- MODE: LTE 66  
 OPERATING FREQUENCY: 1745,000,000 Hz  
 CHANNEL: 132322 (15 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1744 999 999	0.0	0.000 000	0.000
100 %		-30	1745 000 001	2.8	0.000 000	0.002
100 %		-20	1744 999 996	-2.6	0.000 000	-0.001
100 %		-10	1745 000 001	2.2	0.000 000	0.001
100 %		0	1744 999 997	-2.0	0.000 000	-0.001
100 %		+10	1744 999 997	-1.3	0.000 000	-0.001
100 %		+30	1744 999 997	-1.2	0.000 000	-0.001
100 %		+40	1745 000 000	1.6	0.000 000	0.001
100 %		+50	1745 000 002	3.6	0.000 000	0.002
Batt. Endpoint	3.300	+20	1744 999 998	-0.9	0.000 000	-0.001

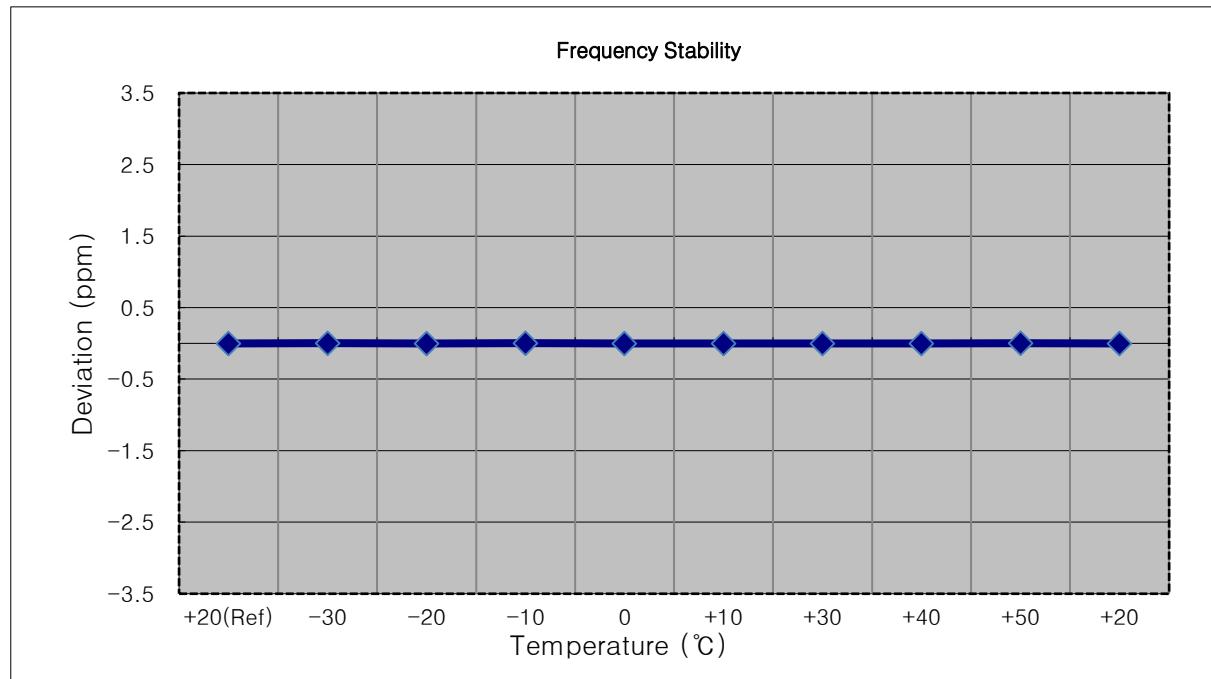


- MODE: LTE 66  
 OPERATING FREQUENCY: 1745,000,000 Hz  
 CHANNEL: 132322 (20 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 003	0.0	0.000 000	0.000
100 %		-30	1745 000 001	-2.4	0.000 000	-0.001
100 %		-20	1745 000 002	-1.3	0.000 000	-0.001
100 %		-10	1745 000 001	-2.3	0.000 000	-0.001
100 %		0	1745 000 001	-2.3	0.000 000	-0.001
100 %		+10	1745 000 000	-3.0	0.000 000	-0.002
100 %		+30	1745 000 001	-2.2	0.000 000	-0.001
100 %		+40	1745 000 006	3.2	0.000 000	0.002
100 %		+50	1745 000 005	1.6	0.000 000	0.001
Batt. Endpoint	3.300	+20	1744 999 998	-5.3	0.000 000	-0.003

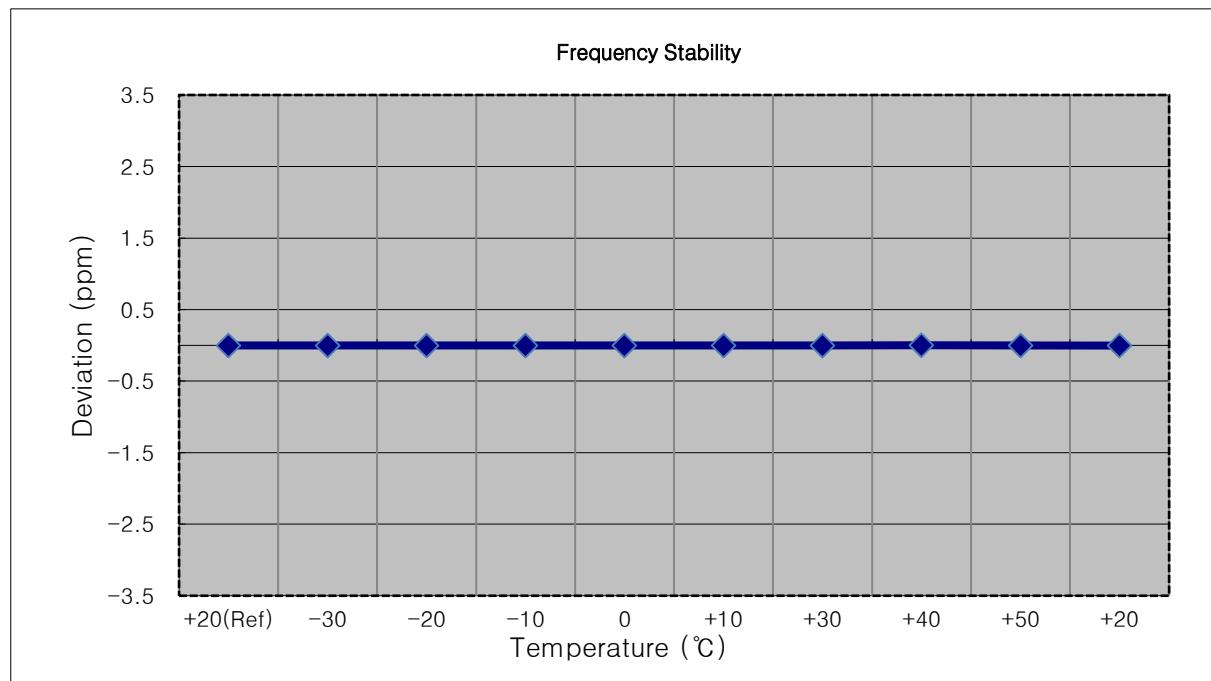


- MODE: LTE 66  
 OPERATING FREQUENCY: 1779,300,000 Hz  
 CHANNEL: 132665 (1.4 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1779 299 996	0.0	0.000 000	0.000
100 %		-30	1779 299 999	3.7	0.000 000	0.002
100 %		-20	1779 299 998	2.0	0.000 000	0.001
100 %		-10	1779 299 998	2.5	0.000 000	0.001
100 %		0	1779 299 993	-3.0	0.000 000	-0.002
100 %		+10	1779 299 999	3.6	0.000 000	0.002
100 %		+30	1779 299 993	-2.2	0.000 000	-0.001
100 %		+40	1779 299 998	2.3	0.000 000	0.001
100 %		+50	1779 299 993	-2.4	0.000 000	-0.001
Batt. Endpoint	3.300	+20	1779 300 000	3.9	0.000 000	0.002

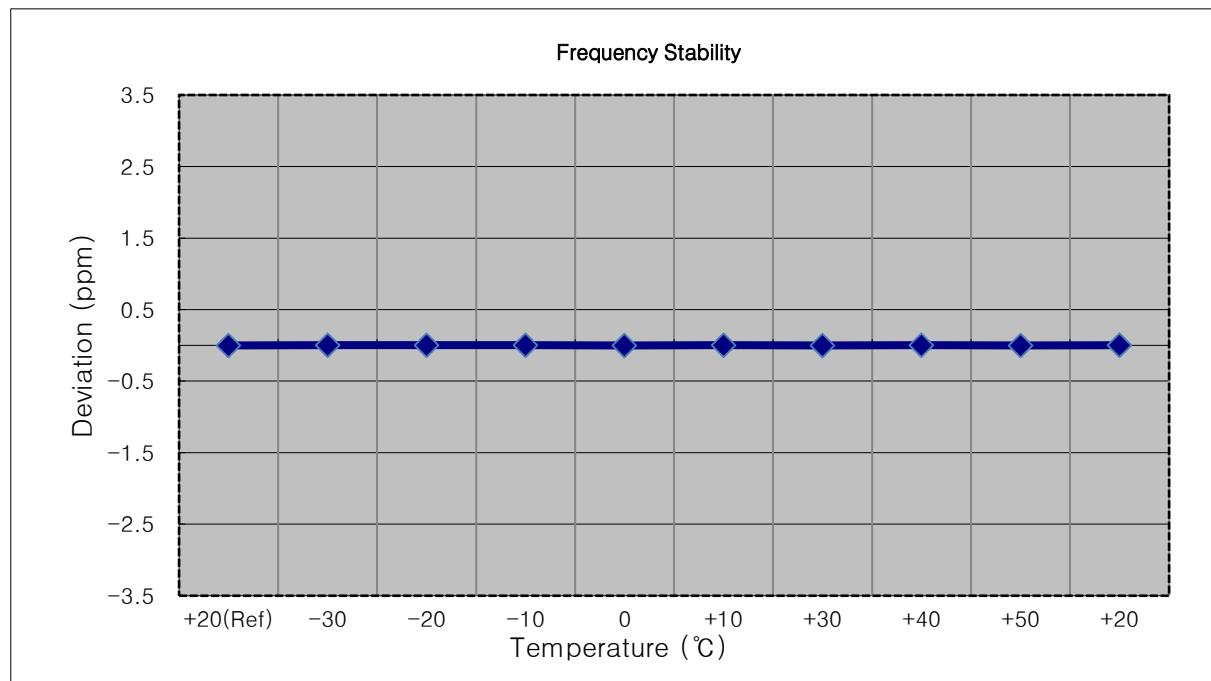


- MODE: LTE 66  
 OPERATING FREQUENCY: 1778,500,000 Hz  
 CHANNEL: 132657 (3 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1778 500 005	0.0	0.000 000	0.000
100 %		-30	1778 500 010	5.4	0.000 000	0.003
100 %		-20	1778 500 012	7.3	0.000 000	0.004
100 %		-10	1778 500 008	3.4	0.000 000	0.002
100 %		0	1778 499 998	-6.5	0.000 000	-0.004
100 %		+10	1778 500 009	4.1	0.000 000	0.002
100 %		+30	1778 500 011	5.8	0.000 000	0.003
100 %		+40	1778 500 001	-3.4	0.000 000	-0.002
100 %		+50	1778 500 010	5.7	0.000 000	0.003
Batt. Endpoint	3.300	+20	1778 500 010	5.7	0.000 000	0.003

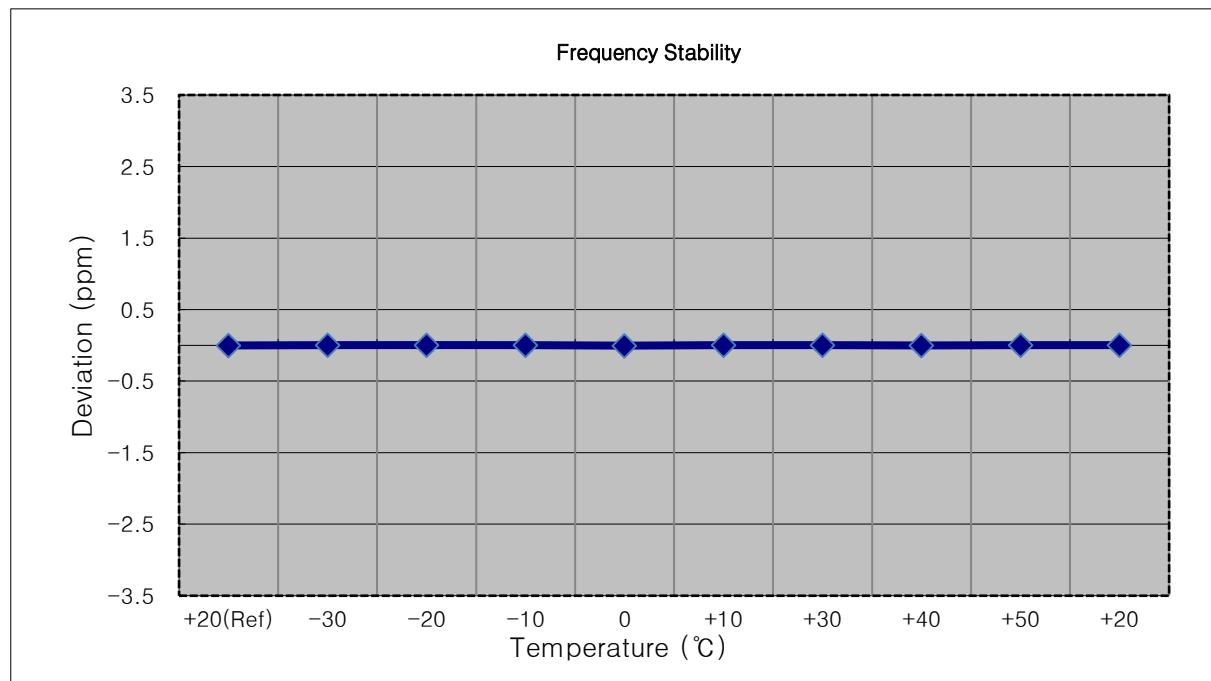


- MODE: LTE 66  
 OPERATING FREQUENCY: 1777,500,000 Hz  
 CHANNEL: 132647 (5 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1777 499 998	0.0	0.000 000	0.000
100 %		-30	1777 500 002	3.7	0.000 000	0.002
100 %		-20	1777 499 996	-1.8	0.000 000	-0.001
100 %		-10	1777 500 001	3.1	0.000 000	0.002
100 %		0	1777 499 996	-1.5	0.000 000	-0.001
100 %		+10	1777 500 002	3.7	0.000 000	0.002
100 %		+30	1777 500 000	2.5	0.000 000	0.001
100 %		+40	1777 499 996	-1.9	0.000 000	-0.001
100 %		+50	1777 500 001	3.4	0.000 000	0.002
Batt. Endpoint	3.300	+20	1777 499 996	-1.6	0.000 000	-0.001

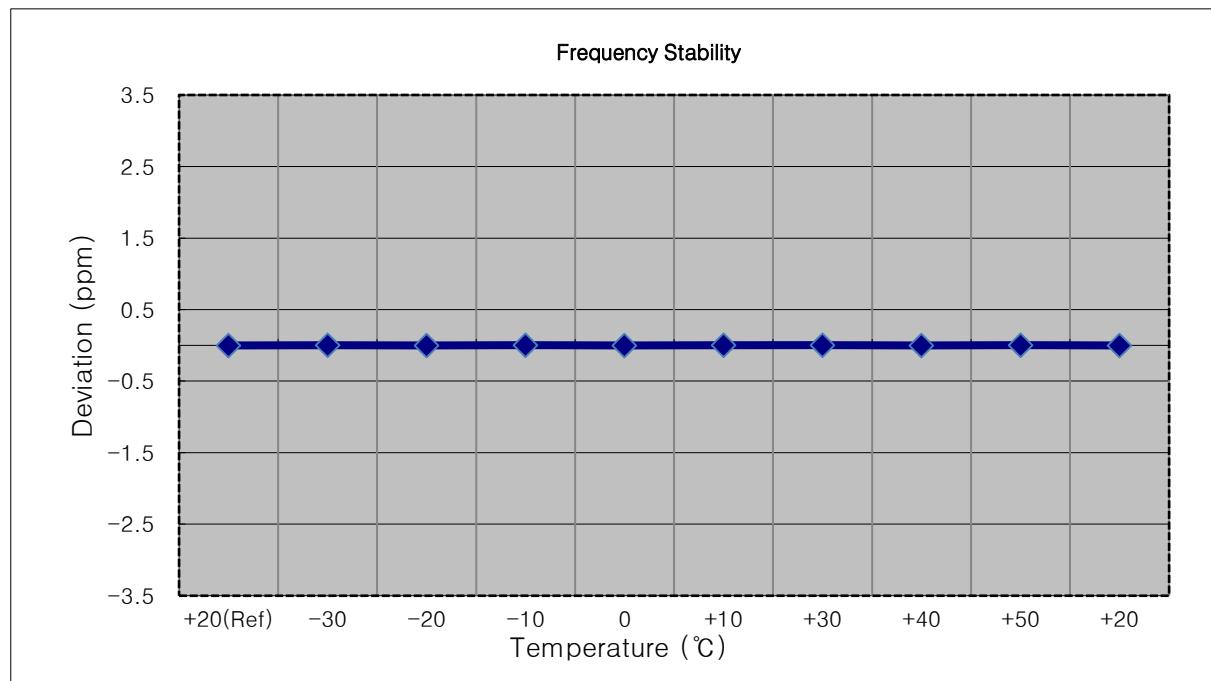


- MODE: LTE 66  
 OPERATING FREQUENCY: 1775,000,000 Hz  
 CHANNEL: 132622 (10 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1774 999 997	0.0	0.000 000	0.000
100 %		-30	1775 000 000	3.1	0.000 000	0.002
100 %		-20	1774 999 999	2.4	0.000 000	0.001
100 %		-10	1774 999 994	-2.7	0.000 000	-0.002
100 %		0	1774 999 994	-3.2	0.000 000	-0.002
100 %		+10	1775 000 001	4.0	0.000 000	0.002
100 %		+30	1774 999 994	-2.7	0.000 000	-0.002
100 %		+40	1774 999 999	1.5	0.000 000	0.001
100 %		+50	1774 999 999	1.5	0.000 000	0.001
Batt. Endpoint	3.300	+20	1774 999 999	2.2	0.000 000	0.001

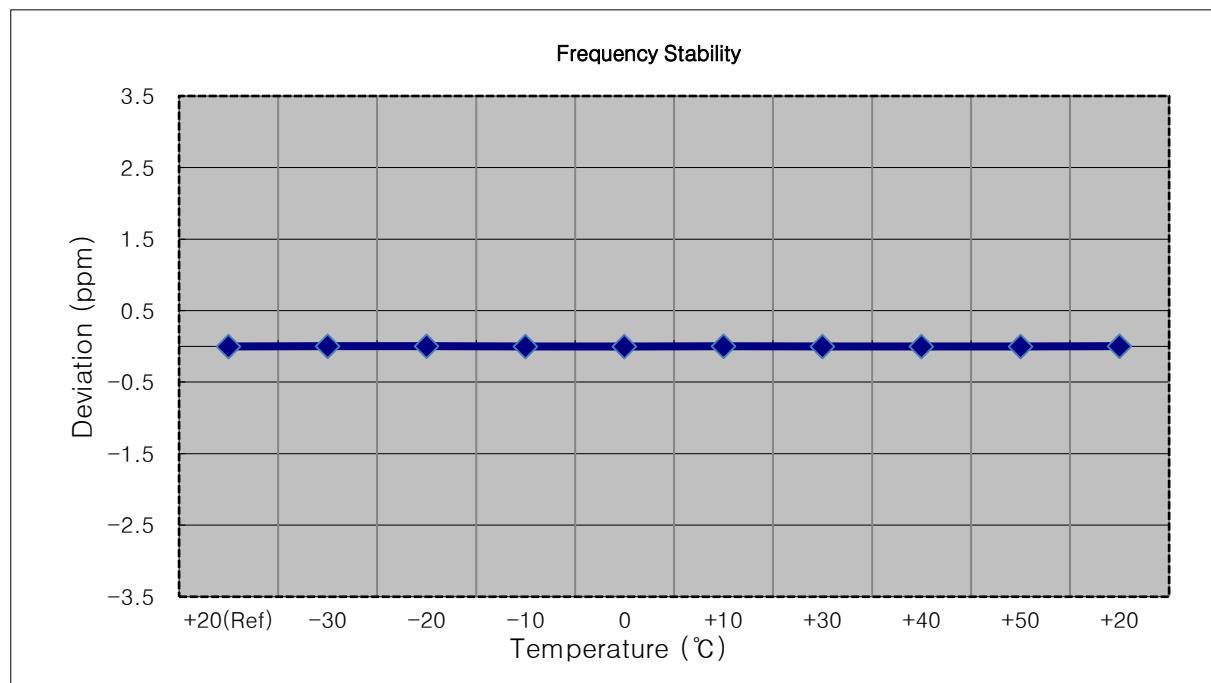


- MODE: LTE 66  
 OPERATING FREQUENCY: 1772,500,000 Hz  
 CHANNEL: 132597 (15 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1772 499 996	0.0	0.000 000	0.000
100 %		-30	1772 499 997	1.1	0.000 000	0.001
100 %		-20	1772 499 993	-3.7	0.000 000	-0.002
100 %		-10	1772 499 995	-1.4	0.000 000	-0.001
100 %		0	1772 500 000	3.8	0.000 000	0.002
100 %		+10	1772 499 993	-3.2	0.000 000	-0.002
100 %		+30	1772 499 997	0.8	0.000 000	0.000
100 %		+40	1772 499 995	-1.6	0.000 000	-0.001
100 %		+50	1772 499 998	1.5	0.000 000	0.001
Batt. Endpoint		3.300	+20	1772 499 998	1.4	0.000 000

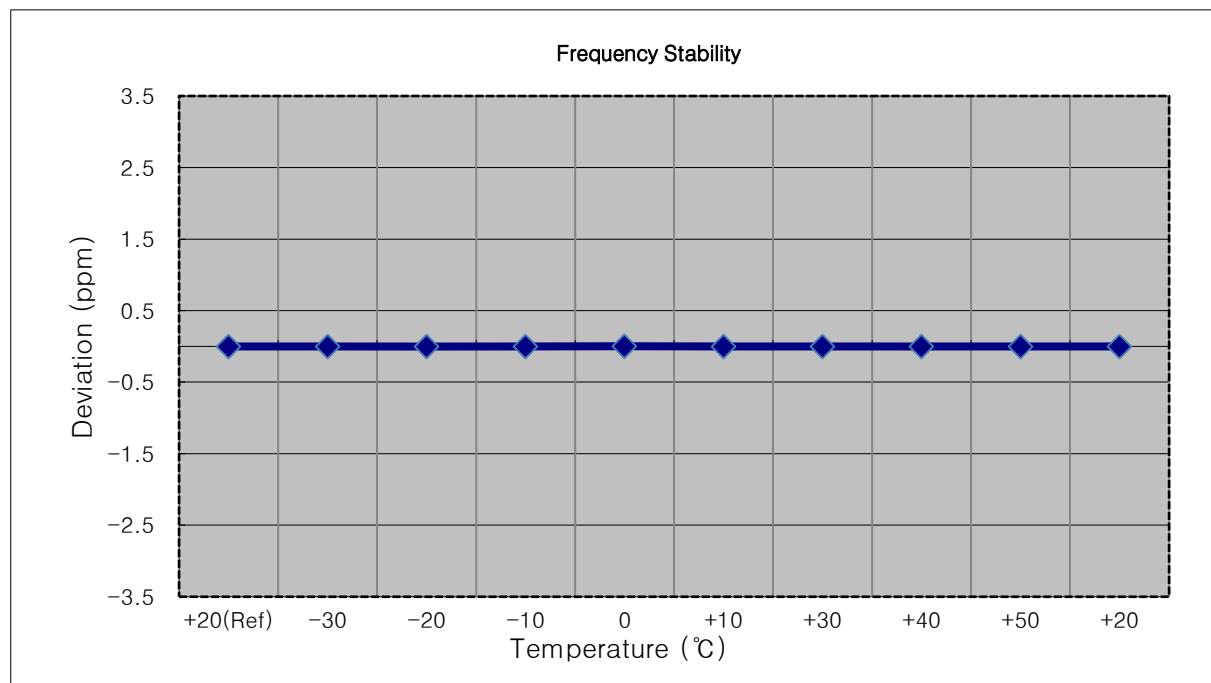

- MODE: LTE 66  
 OPERATING FREQUENCY: 1770,000,000 Hz  
 CHANNEL: 132572 (20 MHz)  
 REFERENCE VOLTAGE: 3.880 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1770 000 003	0.0	0.000 000	0.000
100 %		-30	1770 000 004	1.2	0.000 000	0.001
100 %		-20	1770 000 001	-1.8	0.000 000	-0.001
100 %		-10	1769 999 999	-4.0	0.000 000	-0.002
100 %		0	1770 000 004	1.1	0.000 000	0.001
100 %		+10	1770 000 005	1.9	0.000 000	0.001
100 %		+30	1770 000 001	-2.0	0.000 000	-0.001
100 %		+40	1770 000 005	2.0	0.000 000	0.001
100 %		+50	1770 000 004	1.4	0.000 000	0.001
Batt. Endpoint	3.300	+20	1769 999 999	-4.1	0.000 000	-0.002

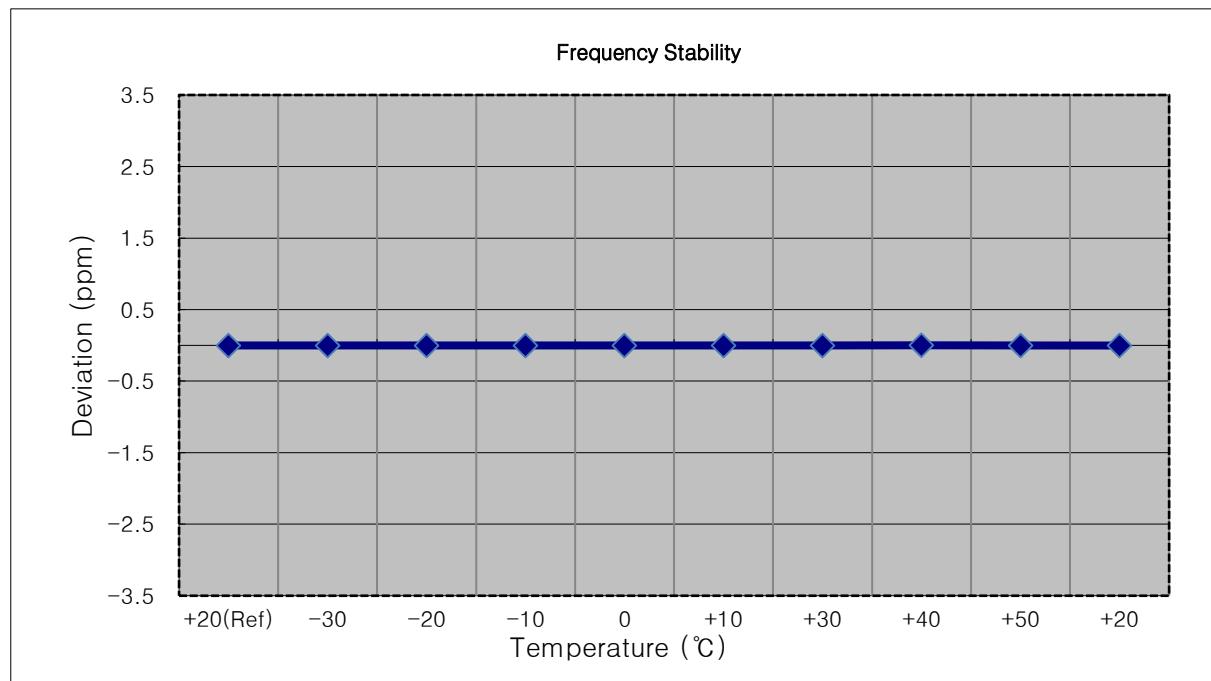

## 10. TEST DATA (Main 1 Ant , Sub 2 Ant)

### 10.1 UPLINK CARRIER AGGREGATION

#### Test Note

1. All tests were evaluated for the two bands using various combinations of RB size, RB offset, modulation, and channel bandwidth.
2. All modes of operation were investigated and the worst case configuration results are reported in this section.  
Please refer to the table below.
3. The worst case is reported with the modulations, RB sizes and offsets.
  - 5A-66A (PCC - Modulation: QPSK, RB: 1, RB Offset: 0, SCC - Modulation: QPSK, RB: 1, RB Offset: 0)
  - 12A-66A (PCC - Modulation: QPSK, RB: 1, RB Offset: 49, SCC - Modulation: QPSK, RB: 1, RB Offset: 0)

#### Radiated Spurious Emissions

PCC	SCC	PCC		SCC	
		BW(MHz)	Channel	BW(MHz)	Channel
5A	66A	5	20425	10	132322
12A	66A	10	23130	10	132322

#### 10.1.1 RADIATED SPURIOUS EMISSIONS

##### 5A(PCC)-66A(SCC)

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
1 653.00	-52.36	9.58	-62.91	2.14	V	-55.47	-13.00
2 479.50	-48.77	10.34	-53.25	2.62	V	-45.53	-13.00
3 306.00	-58.16	12.19	-59.35	3.02	V	-50.19	-13.00

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
3 490.00	-54.19	12.34	-60.20	3.08	V	-50.94	-13.00
5 235.00	-56.79	12.84	-55.87	3.95	V	-46.98	-13.00
6 980.00	-55.39	11.40	-47.78	4.56	V	-40.94	-13.00

##### 12A(PCC)-66A(SCC)


Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
1 422.00	-51.09	7.74	-59.72	2.00	V	-53.98	-13.00
2 133.00	-35.81	9.36	-39.94	2.42	V	-33.00	-13.00
2 844.00	-57.07	10.78	-58.89	2.80	V	-50.91	-13.00

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
3 490.00	-54.92	12.34	-60.93	3.08	H	-51.67	-13.00
5 235.00	-55.61	12.84	-54.69	3.95	H	-45.80	-13.00
6 980.00	-54.12	11.40	-46.51	4.56	V	-39.67	-13.00


---

**11. TEST PLOTS(Main 1 Ant)**

BW1.4 M\_BandEdge\_Lowest Channel\_QPSK\_Full RB(1)

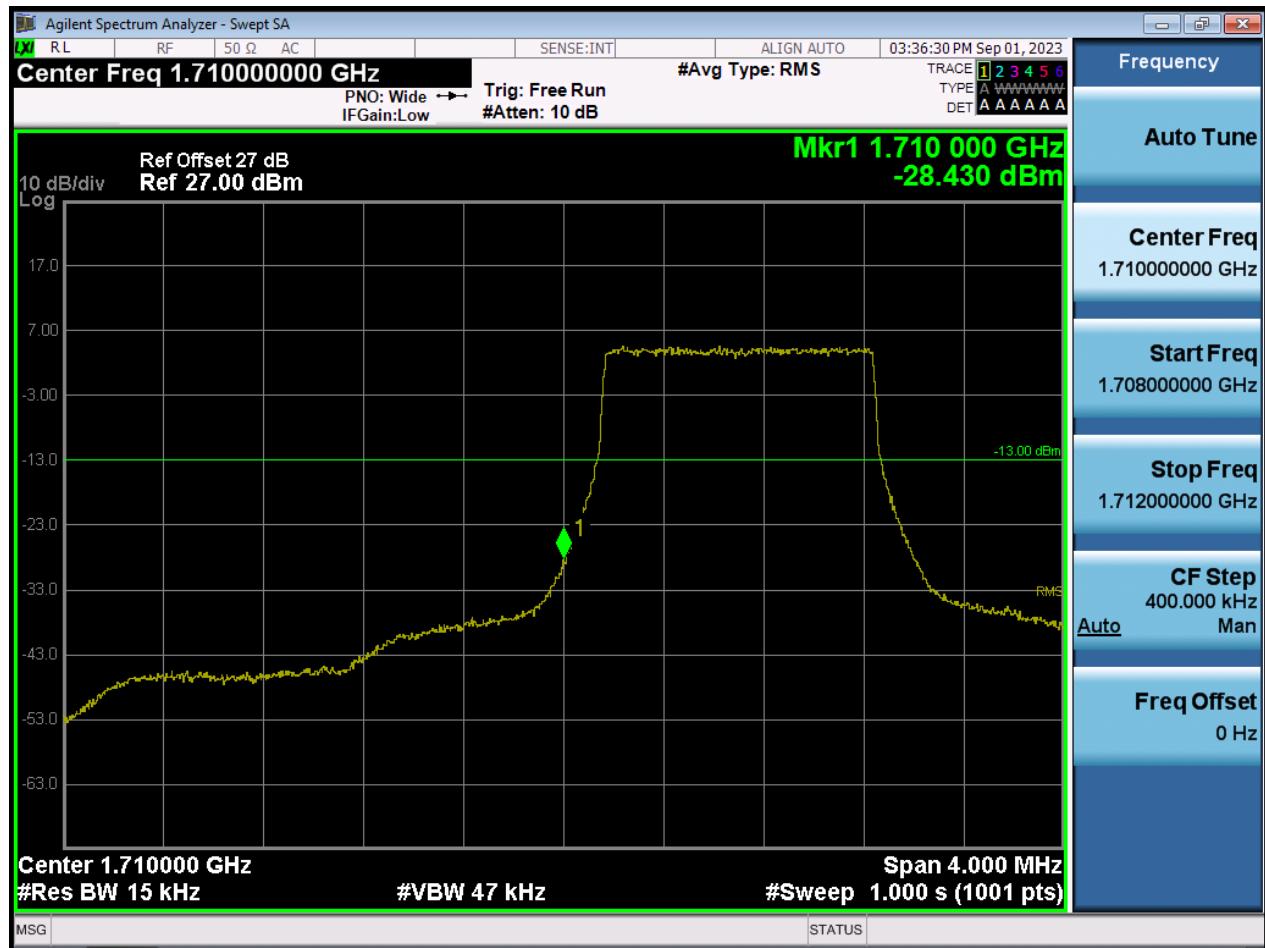


BW1.4 M\_BandEdge\_Lowest Channel\_QPSK\_Full RB(2)

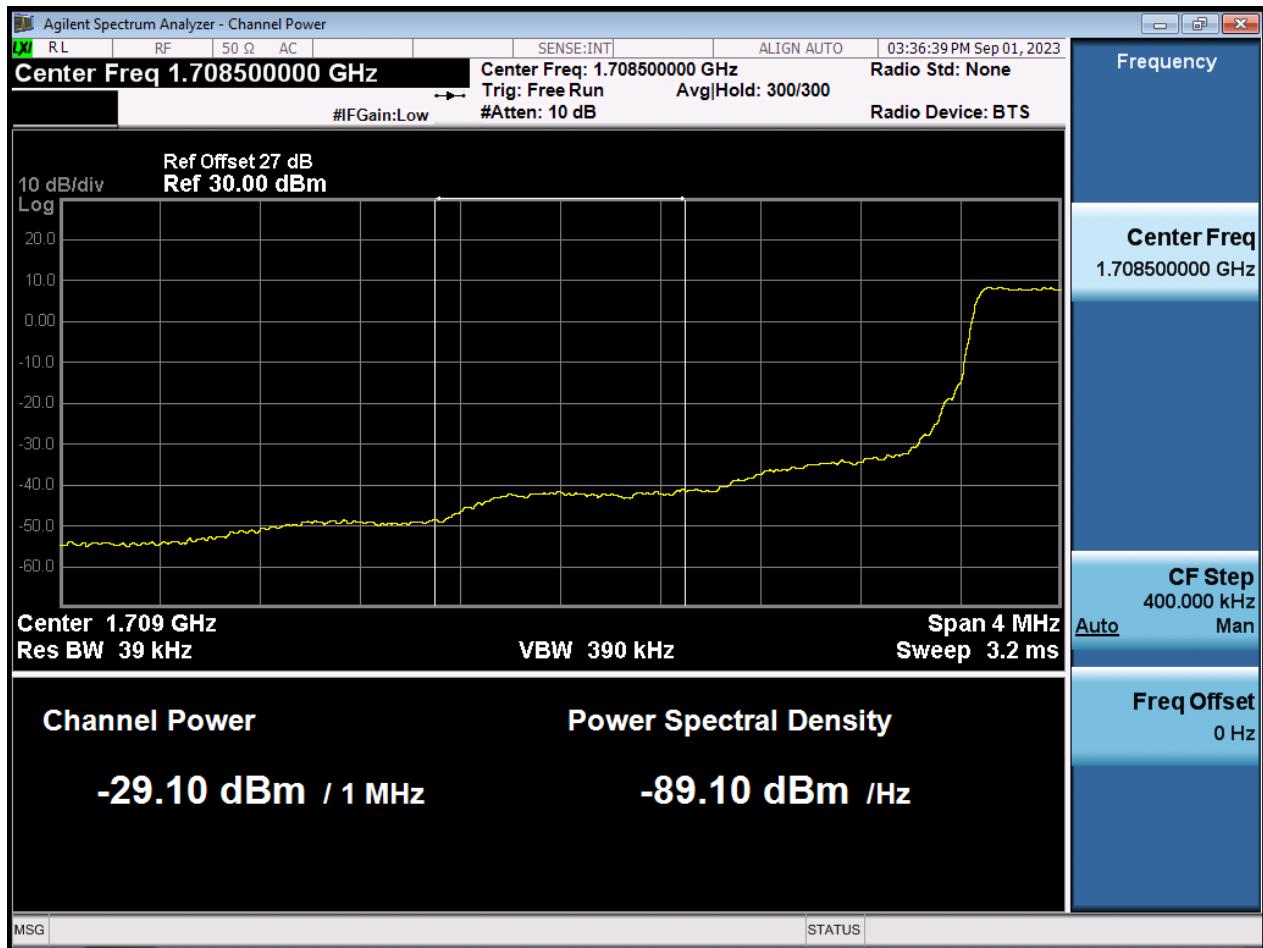


BW1.4 M\_BandEdge\_Highest Channel\_QPSK\_Full RB(1)




BW1.4 M\_BandEdge\_Highest Channel\_QPSK\_Full RB(2)

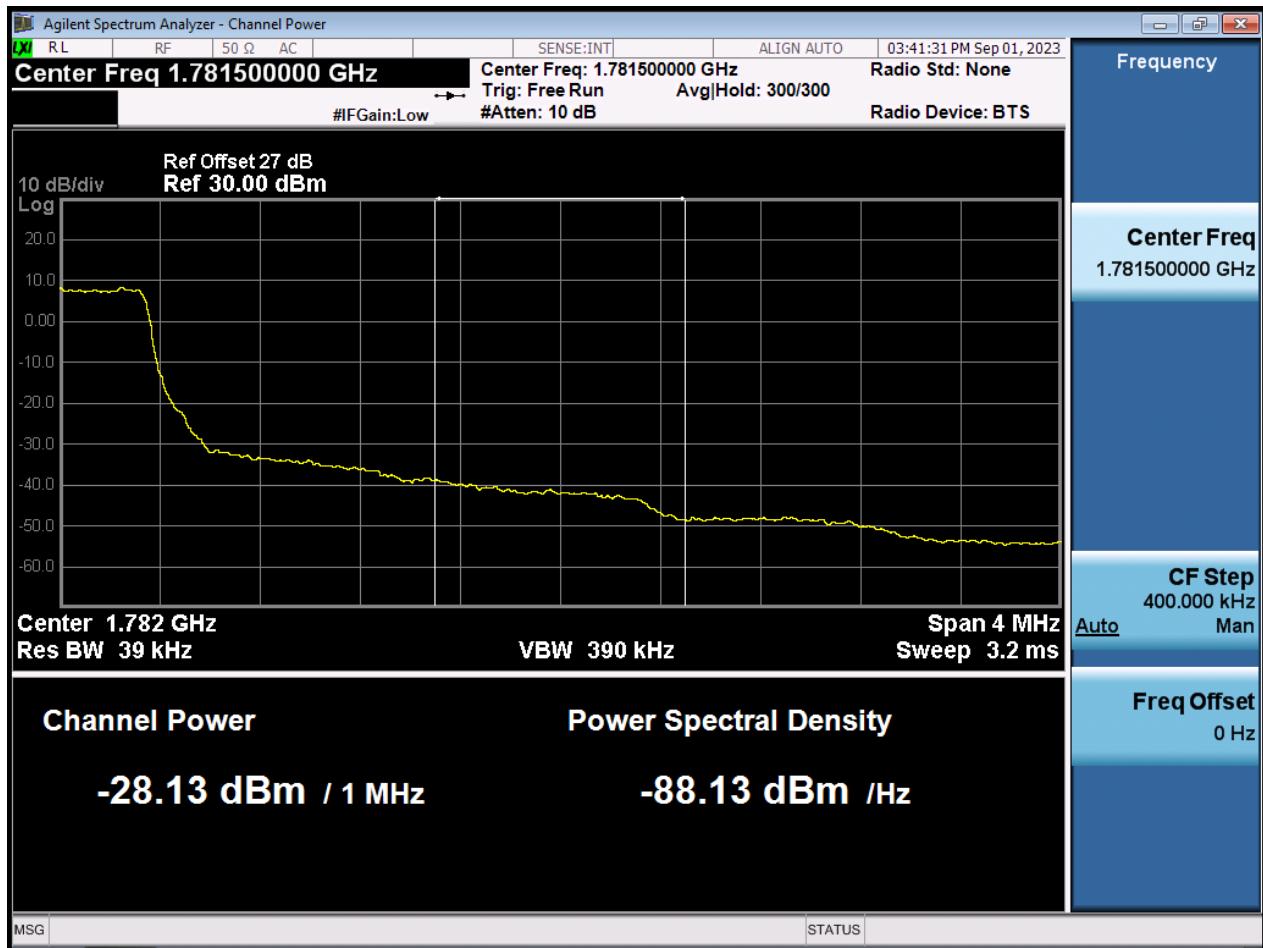

BW1.4 M\_BandEdge\_Lowest Channel\_QPSK\_1RB

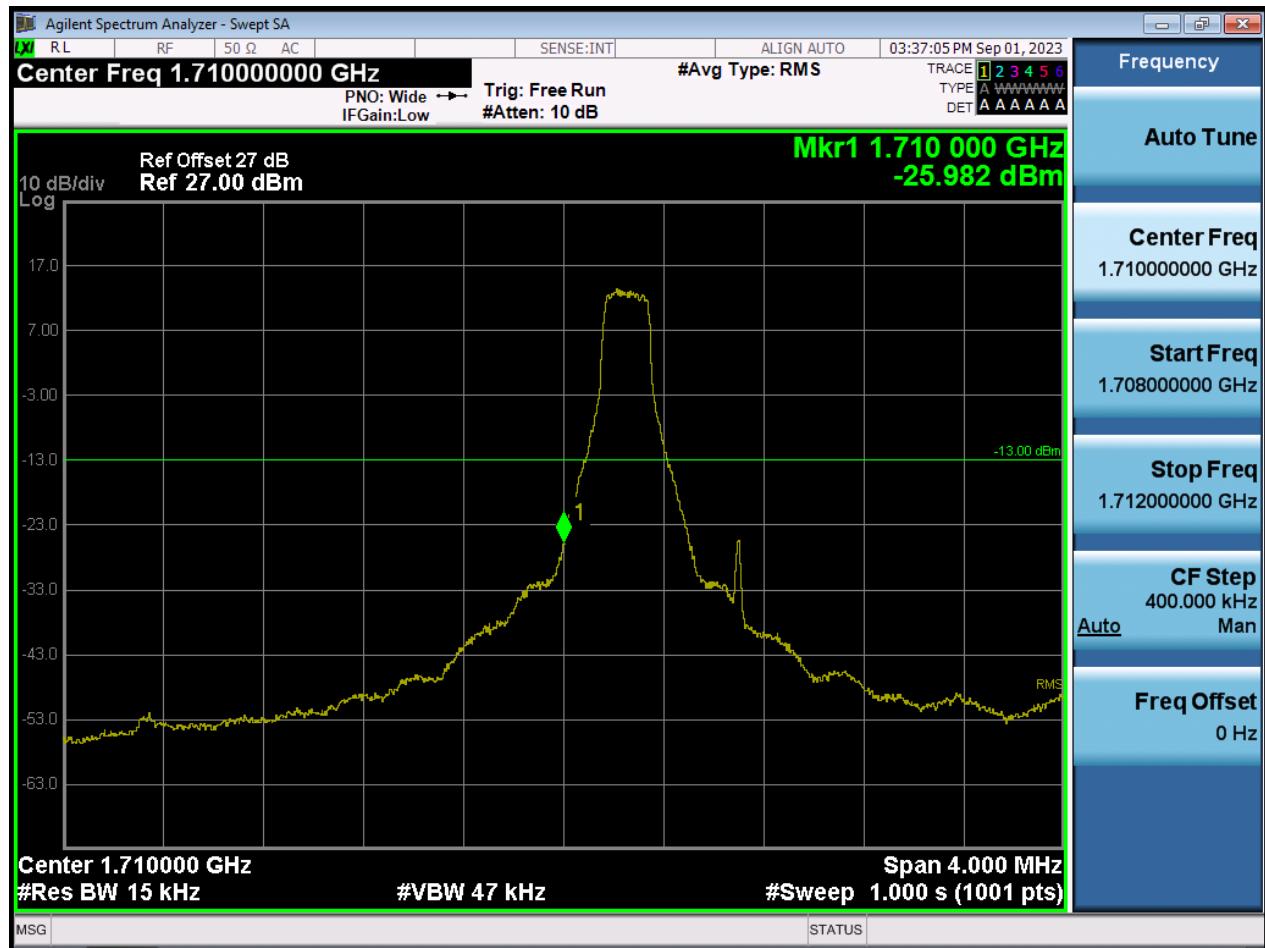


BW1.4 M\_BandEdge\_Highest Channel\_QPSK\_1RB

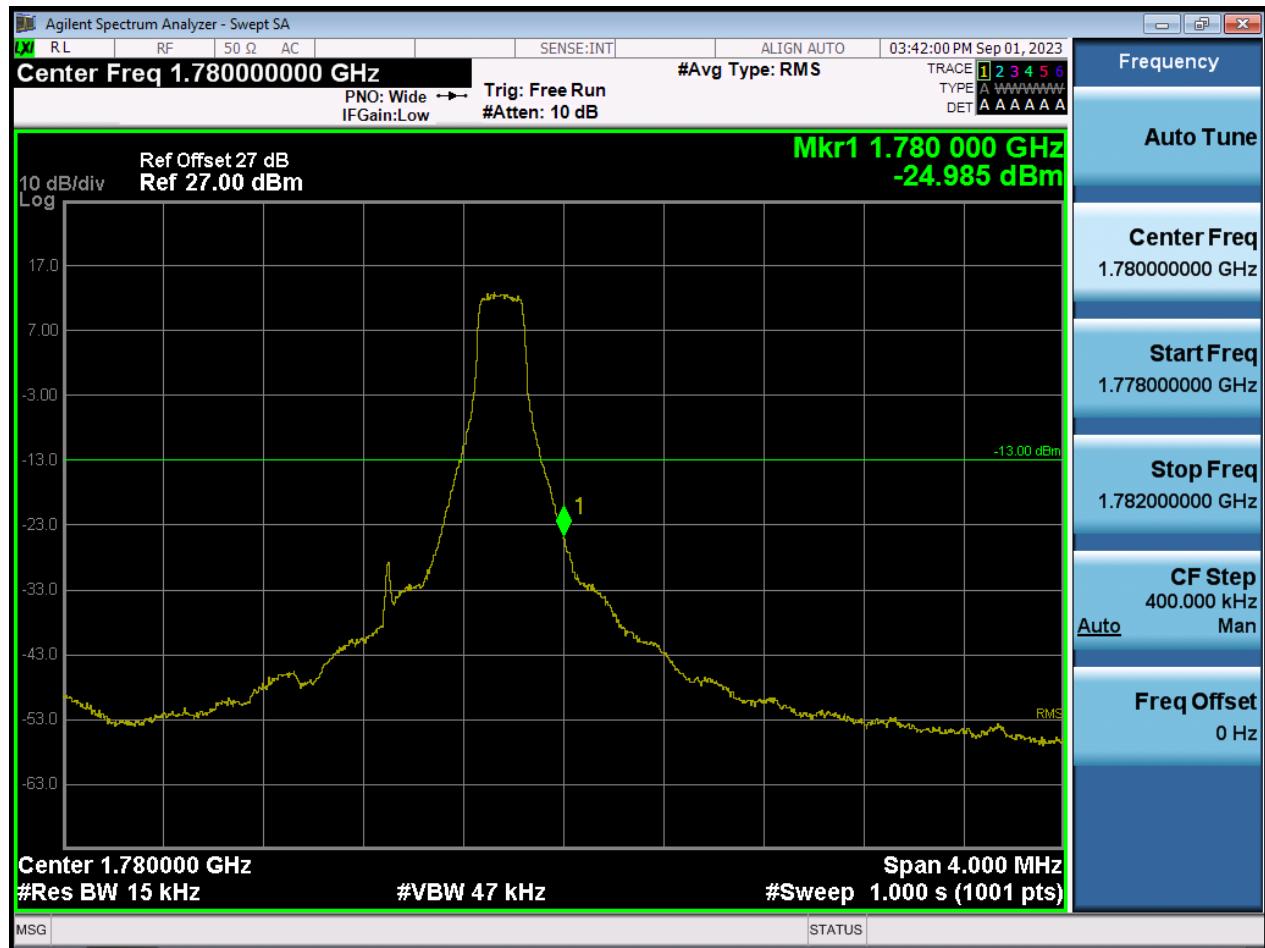

BW3 M\_BandEdge\_Lowest Channel\_QPSK\_Full RB(1)




BW3 M\_BandEdge\_Lowest Channel\_QPSK\_Full RB(2)

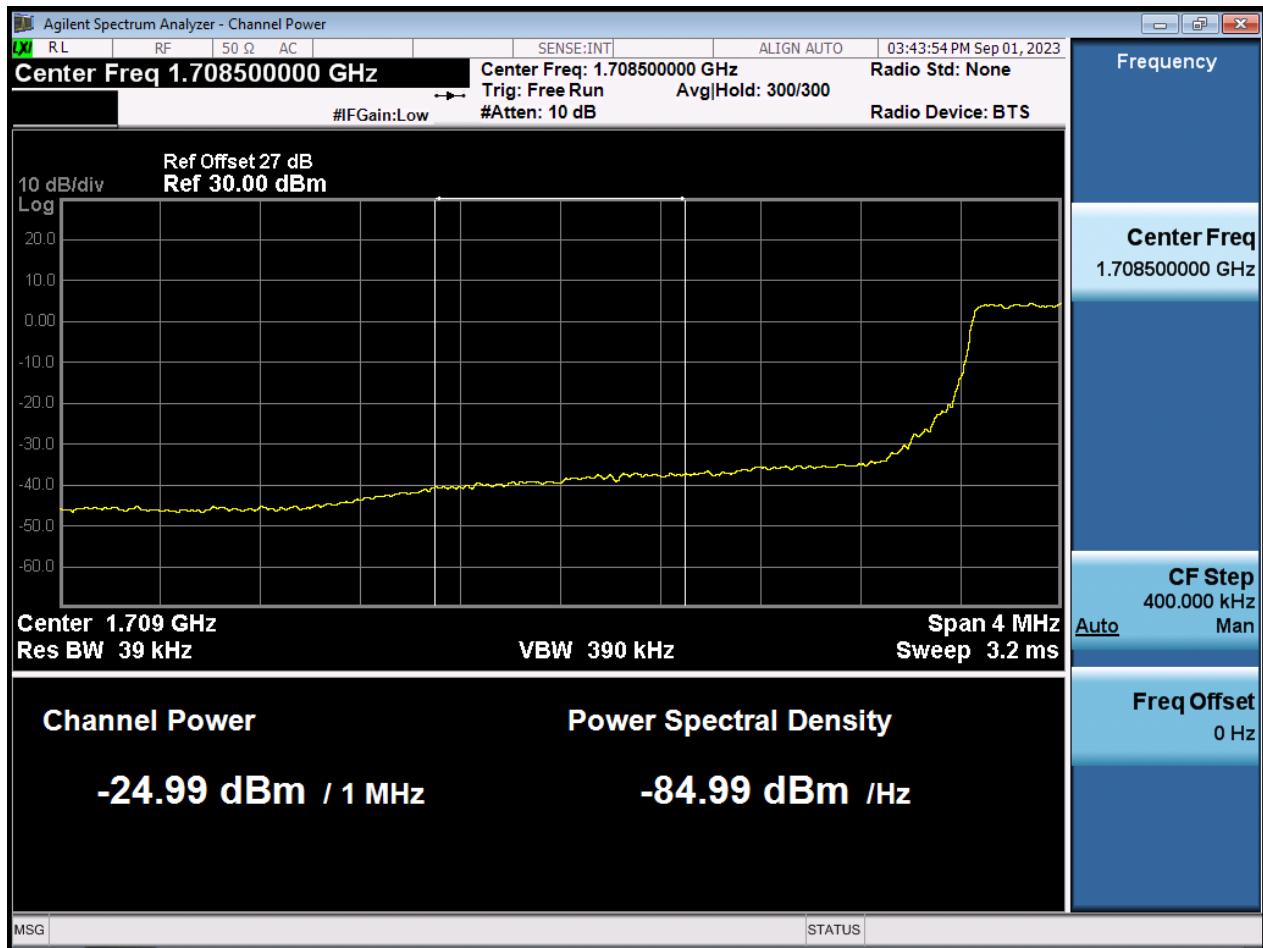

BW3 M\_BandEdge\_Highest Channel\_QPSK\_Full RB(1)



BW3 M\_BandEdge\_Highest Channel\_QPSK\_Full RB(2)

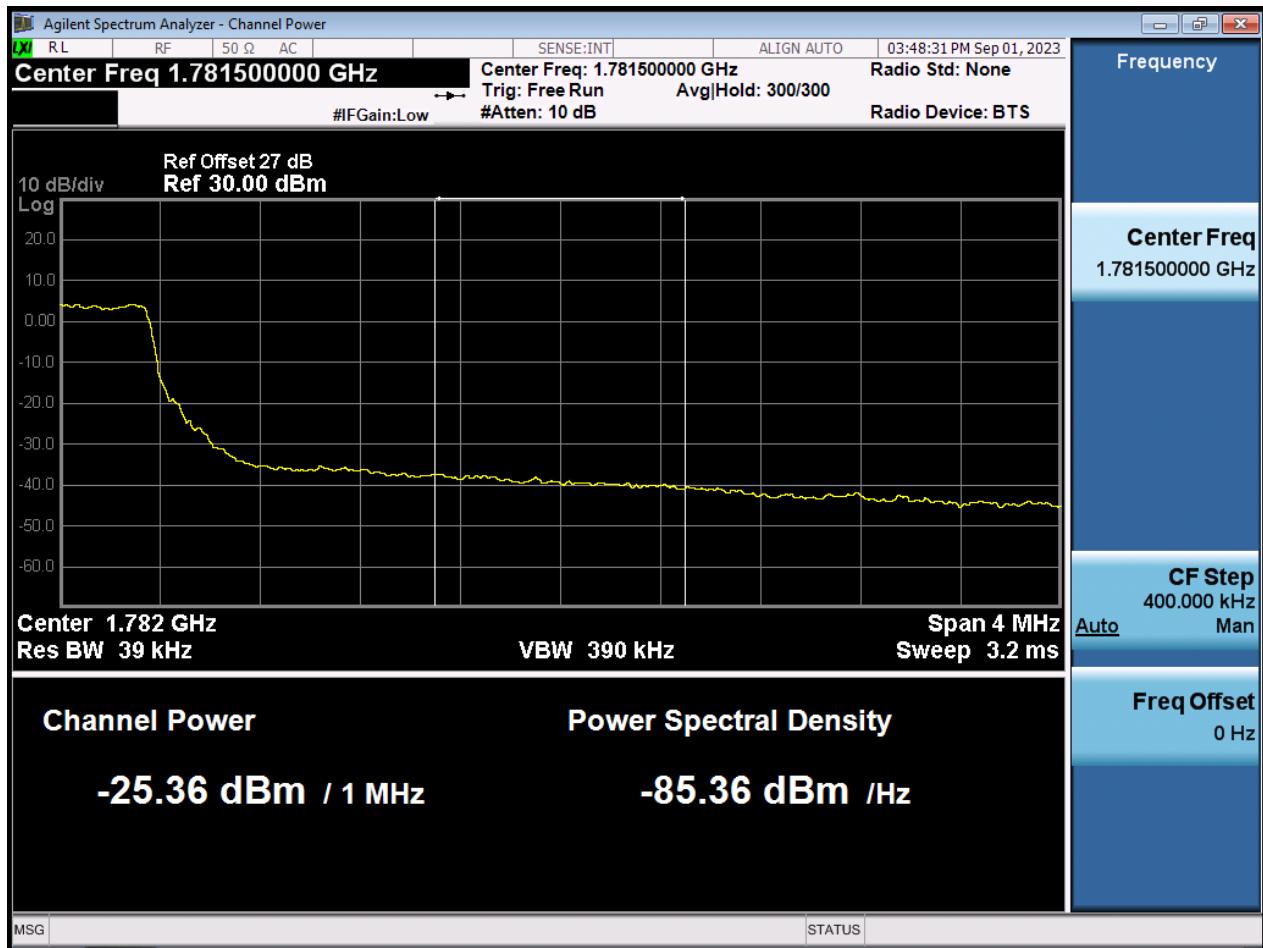


BW3 M\_BandEdge\_Lowest Channel\_QPSK\_1RB




BW3 M\_BandEdge\_Highest Channel\_QPSK\_1RB




BW5 M\_BandEdge\_Lowest Channel\_QPSK\_Full RB(1)

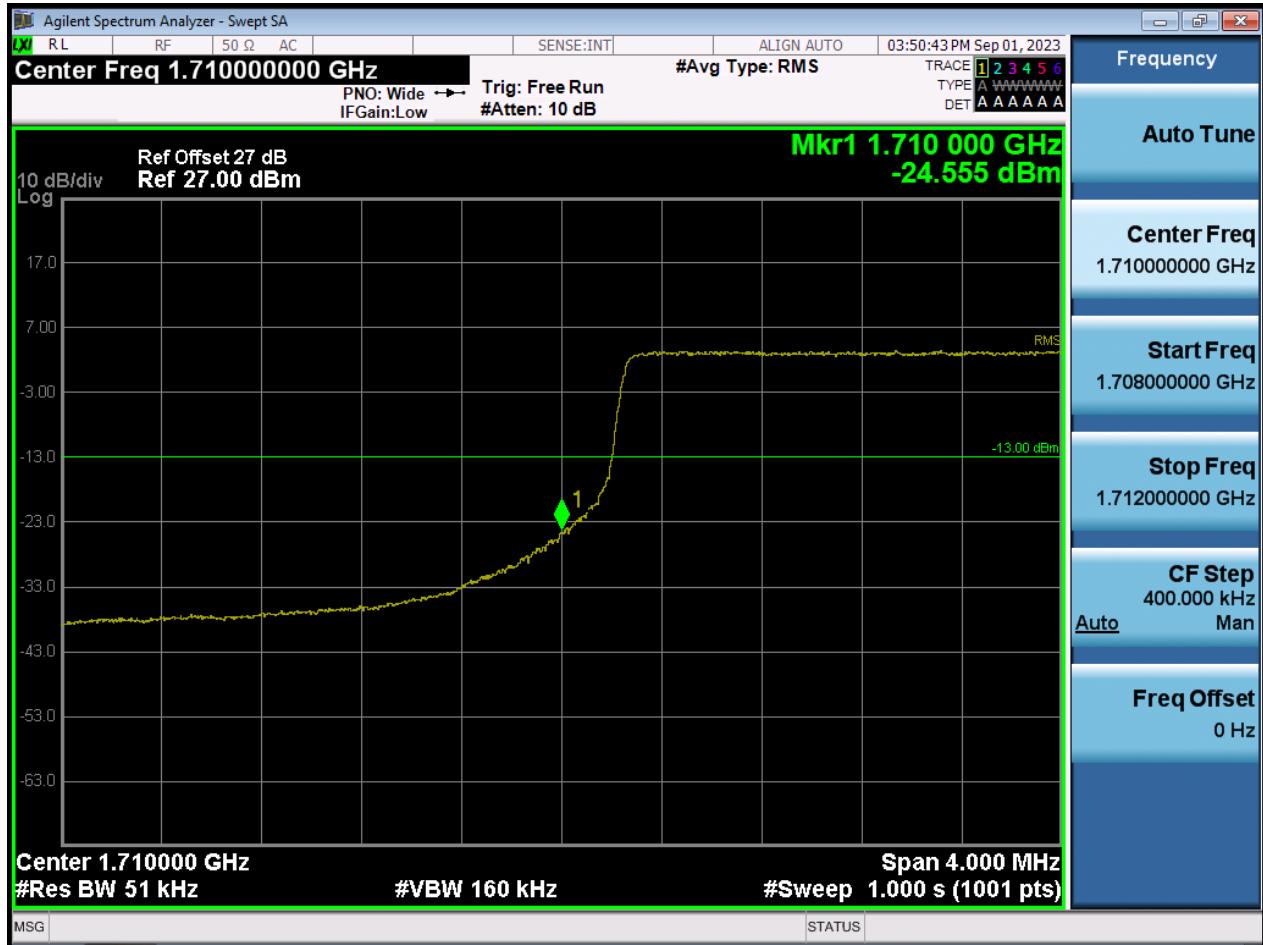


BW5 M\_BandEdge\_Lowest Channel\_QPSK\_Full RB(2)

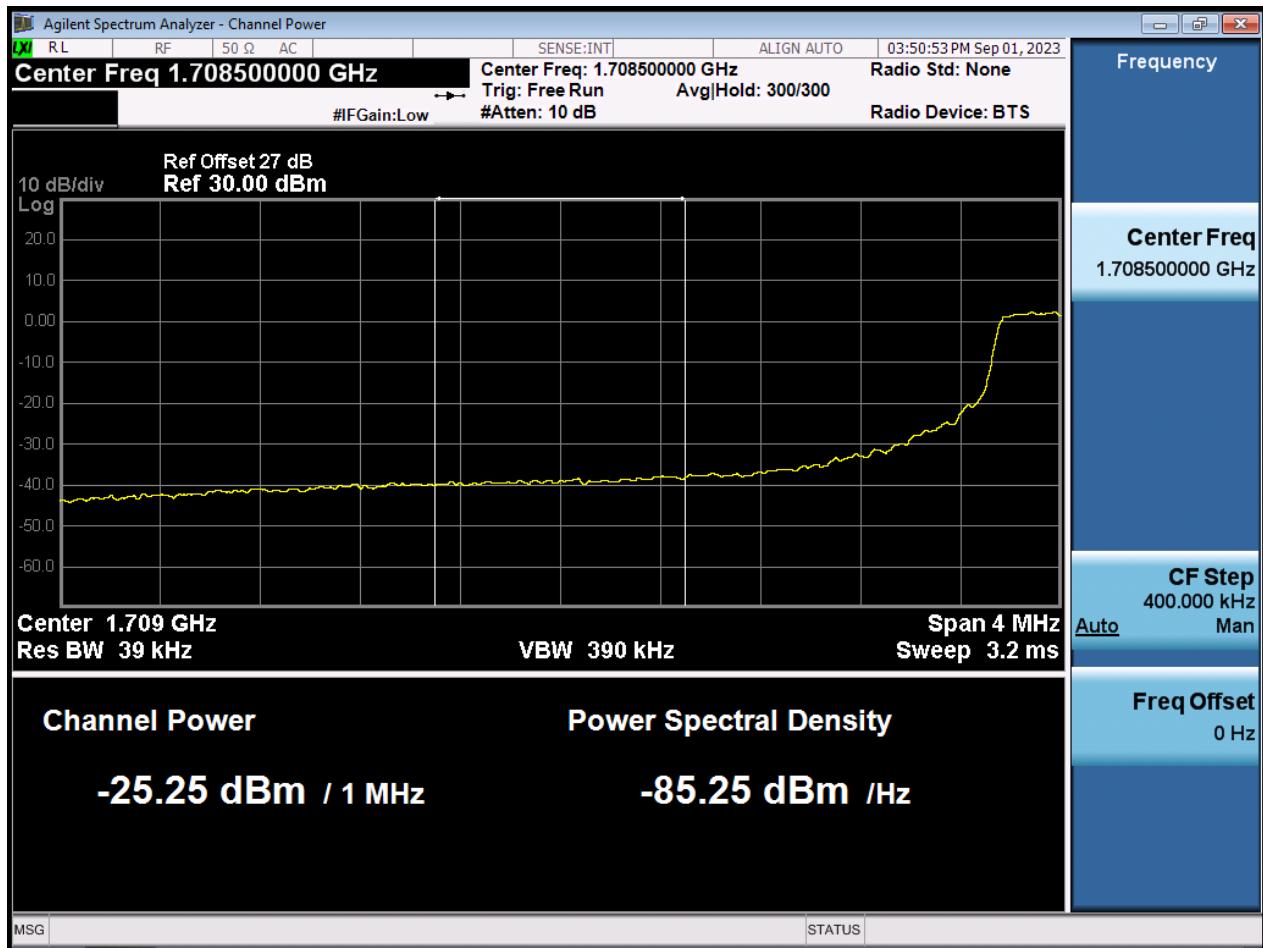

BW5 M\_BandEdge\_Highest Channel\_QPSK\_Full RB(1)

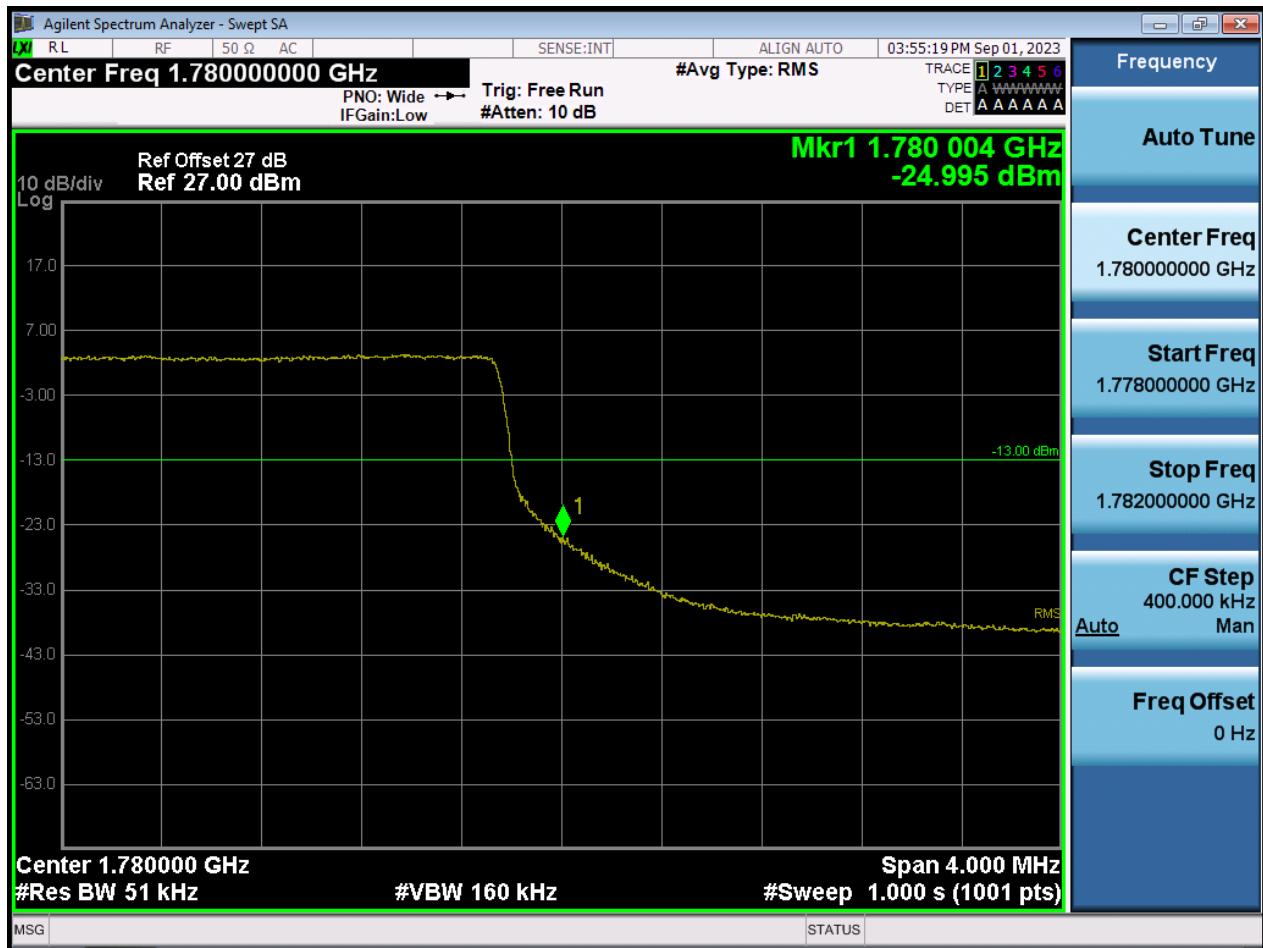

BW5 M\_BandEdge\_Highest Channel\_QPSK\_Full RB(2)

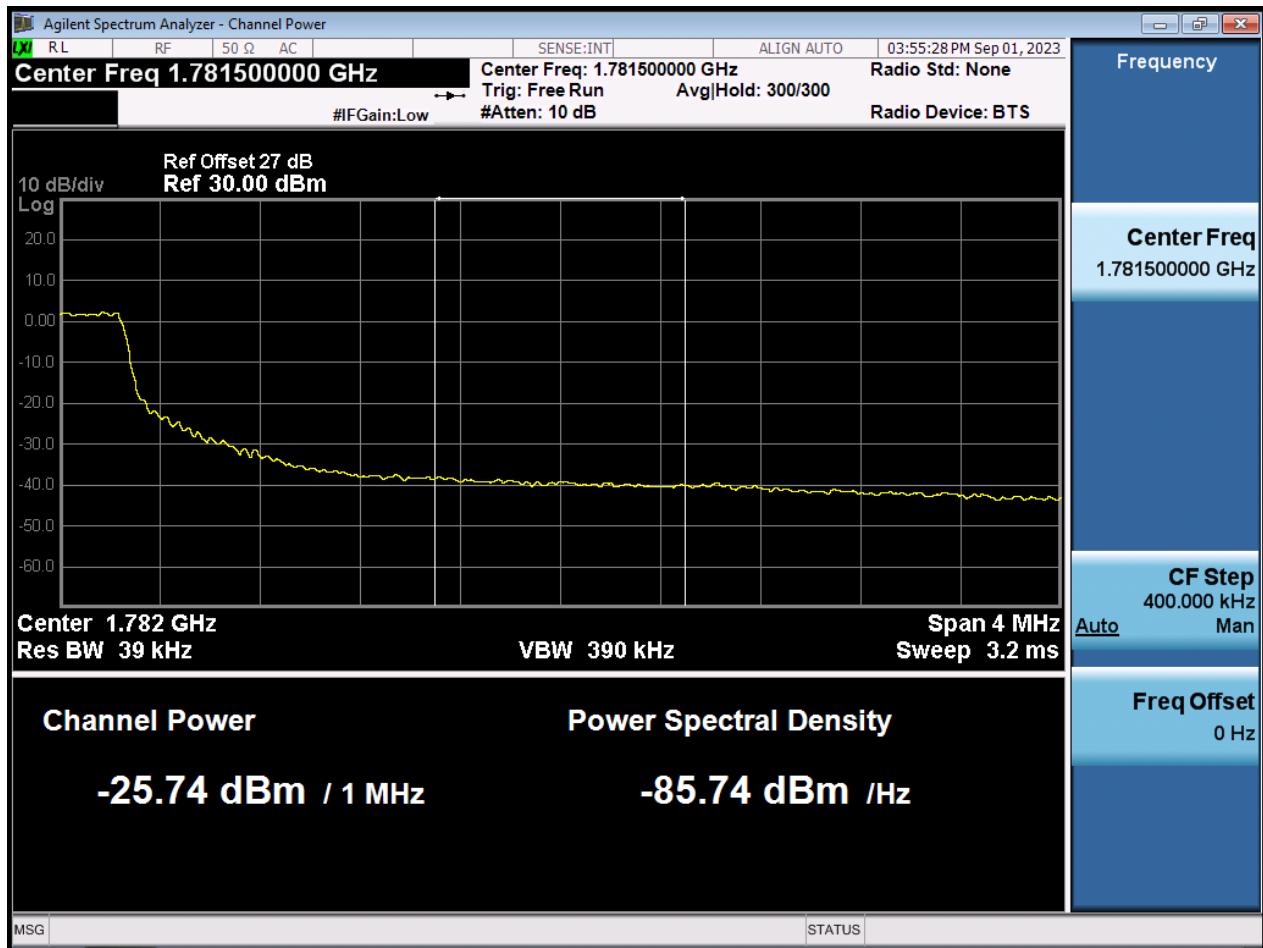

BW5 M\_BandEdge\_Lowest Channel\_QPSK\_1RB




BW5 M\_BandEdge\_Highest Channel\_QPSK\_1RB



BW10 M\_BandEdge\_Lowest Channel\_QPSK\_Full RB(1)




BW10 M\_BandEdge\_Lowest Channel\_QPSK\_Full RB(2)

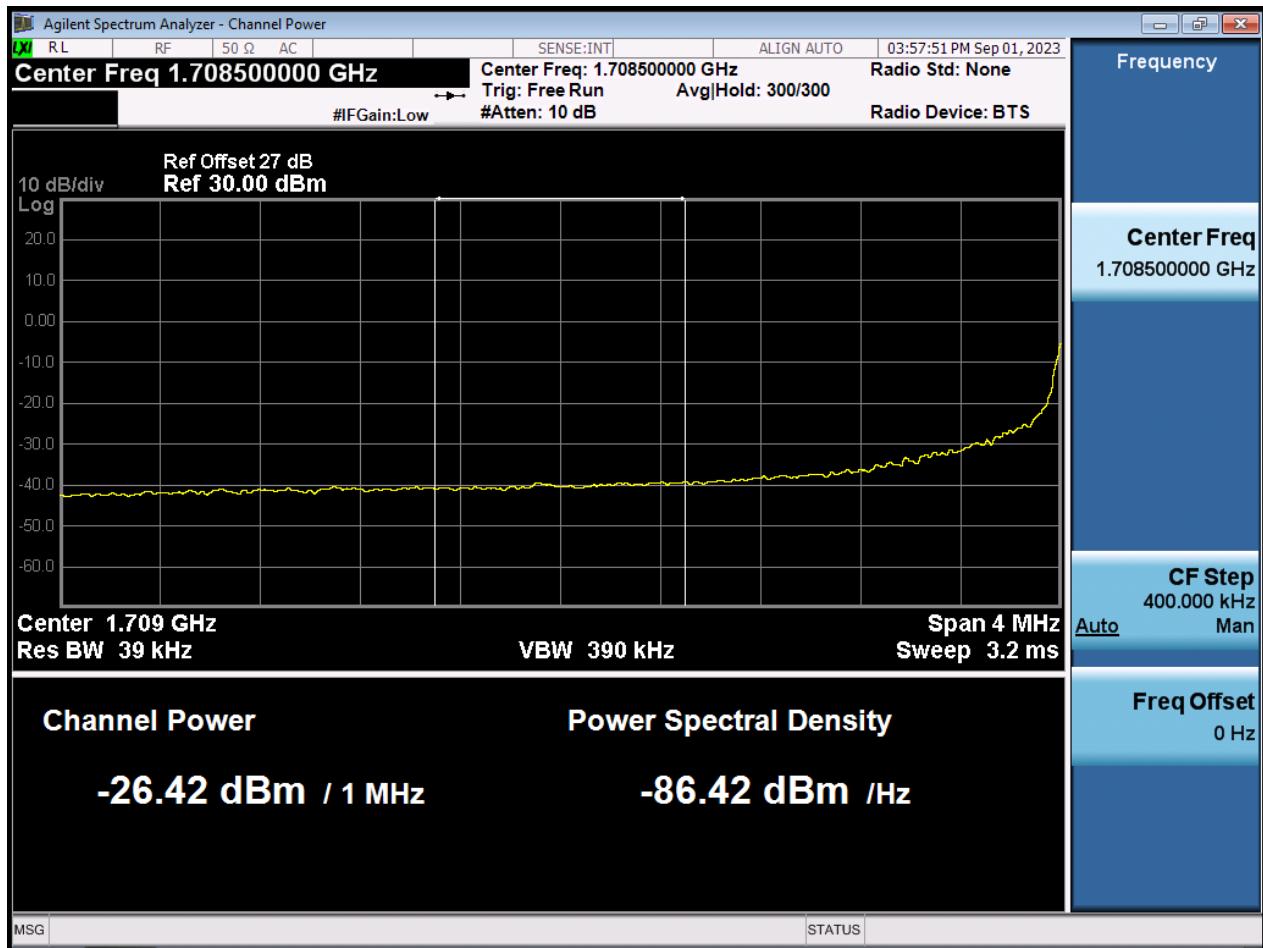

BW10 M\_BandEdge\_Highest Channel\_QPSK\_Full RB(1)



BW10 M\_BandEdge\_Highest Channel\_QPSK\_Full RB(2)

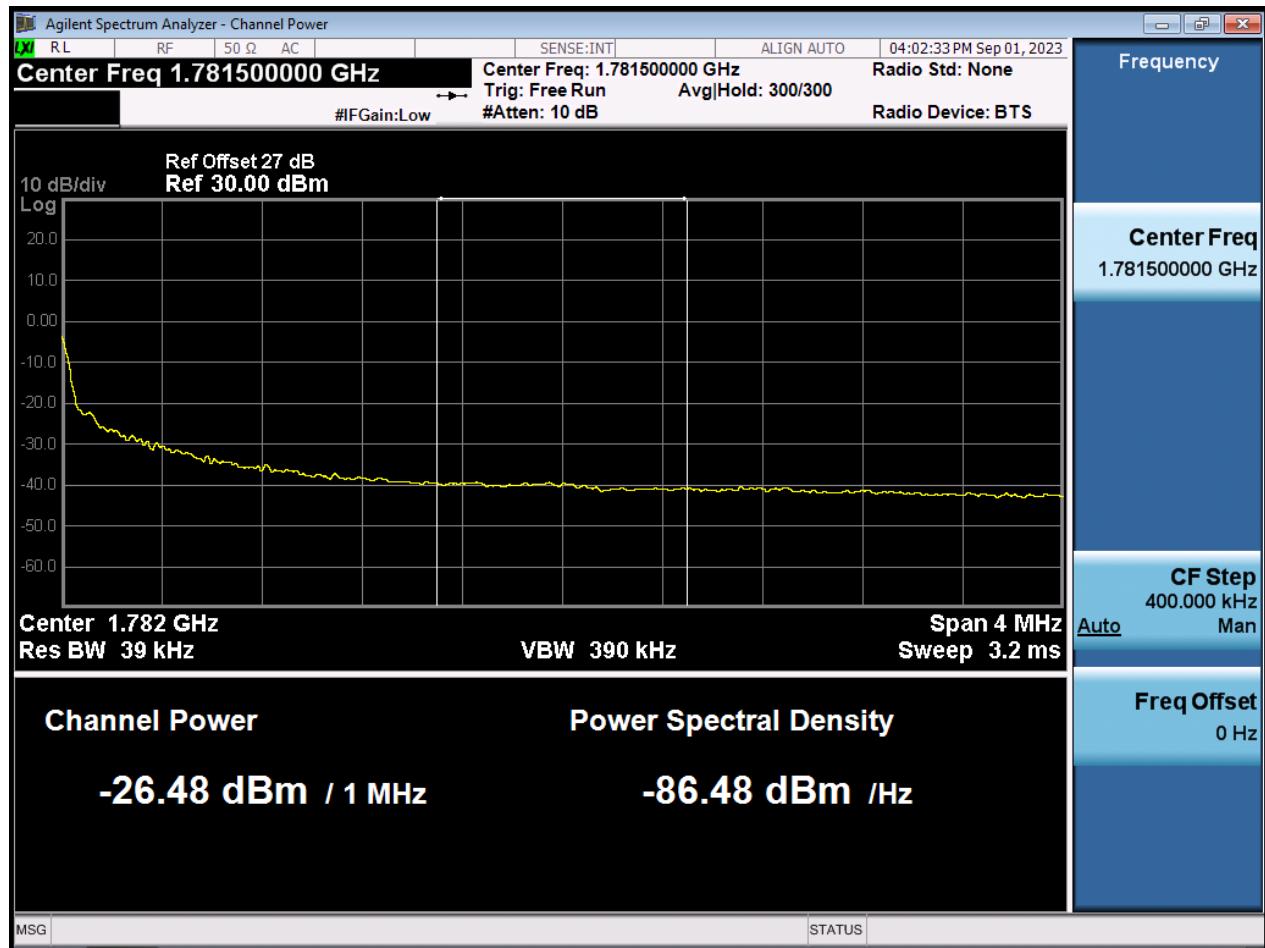

BW10 M\_BandEdge\_Lowest Channel\_QPSK\_1RB




BW10 M\_BandEdge\_Highest Channel\_QPSK\_1RB



BW15 M\_BandEdge\_Lowest Channel\_QPSK\_Full RB(1)




BW15 M\_BandEdge\_Lowest Channel\_QPSK\_Full RB(2)

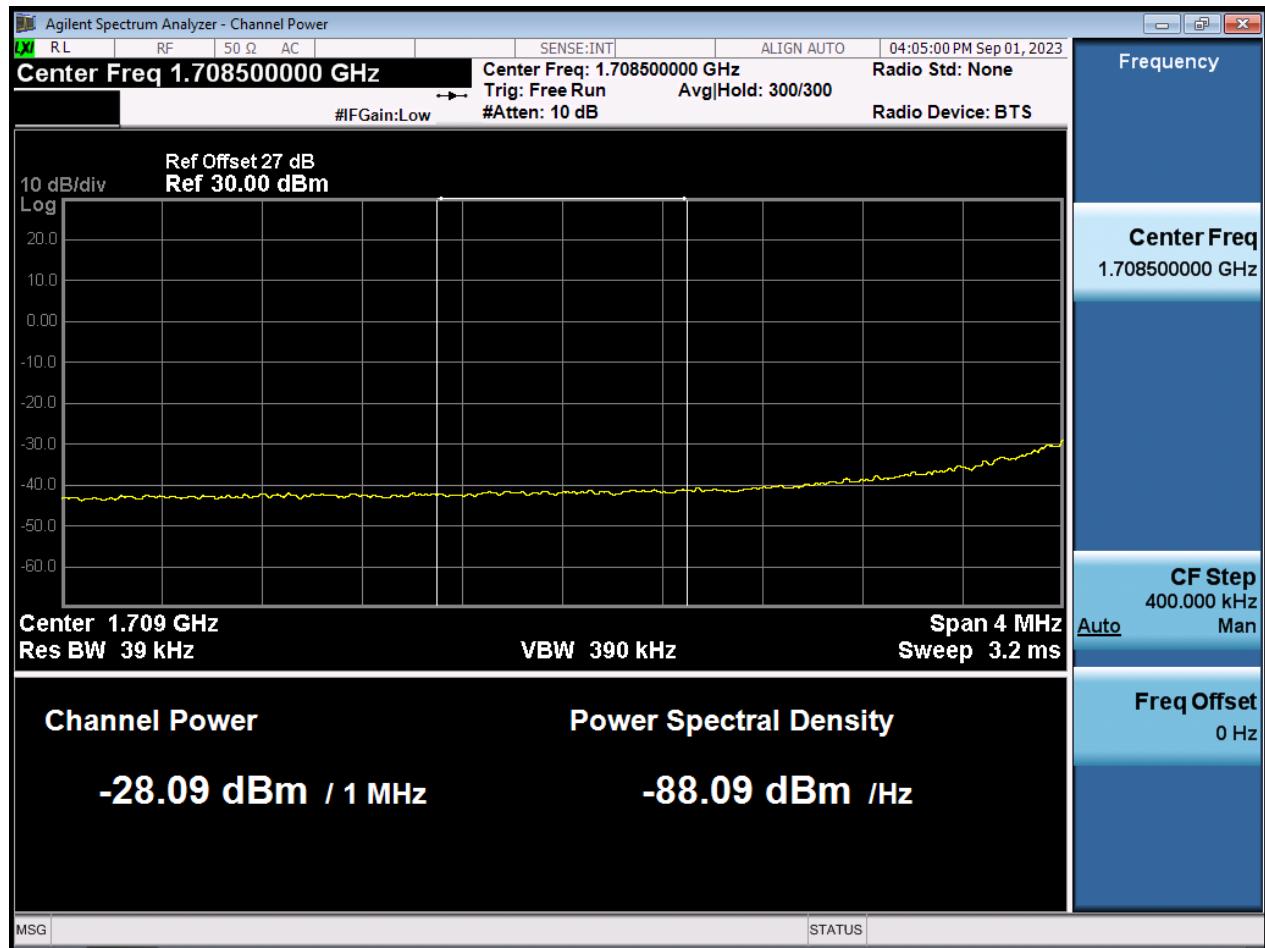

BW15 M\_BandEdge\_Highest Channel\_QPSK\_Full RB(1)



BW15 M\_BandEdge\_Highest Channel\_QPSK\_Full RB(2)

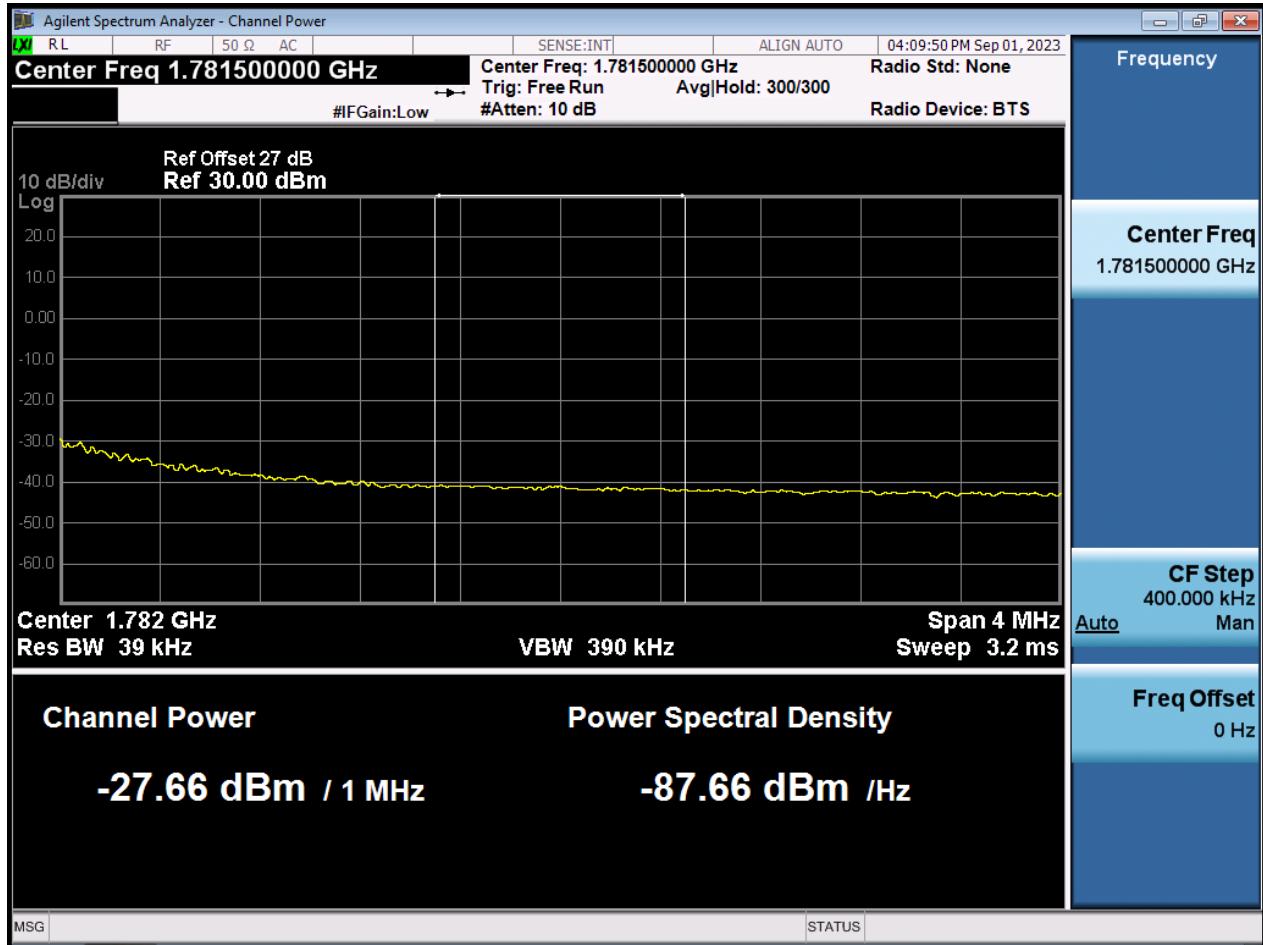

BW15 M\_BandEdge\_Lowest Channel\_QPSK\_1RB




BW15 M\_BandEdge\_Highest Channel\_QPSK\_1RB



BW20 M\_BandEdge\_Lowest Channel\_QPSK\_Full RB(1)




BW20 M\_BandEdge\_Lowest Channel\_QPSK\_Full RB(2)

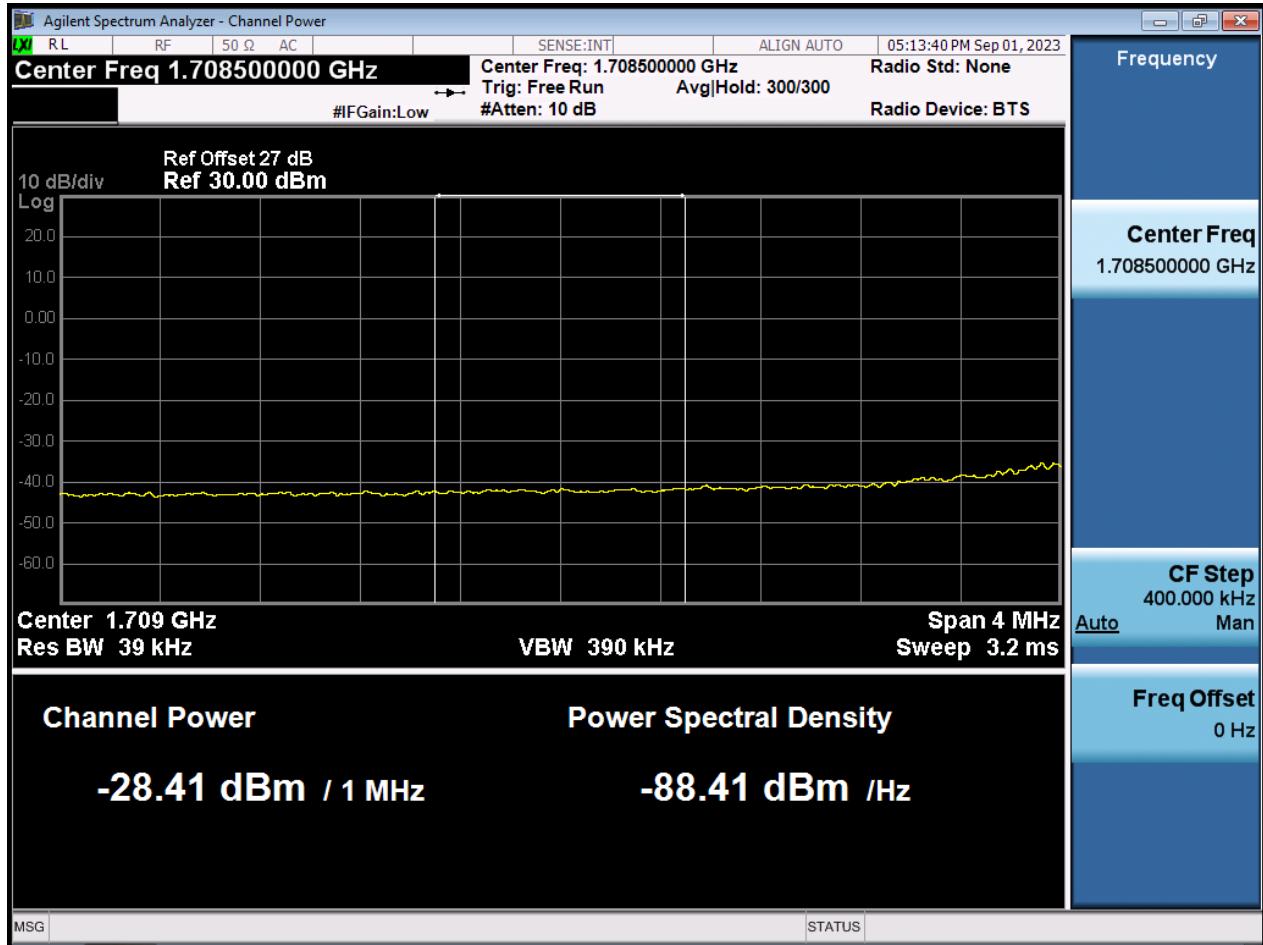

BW20 M\_BandEdge\_Highest Channel\_QPSK\_Full RB(1)



BW20 M\_BandEdge\_Highest Channel\_QPSK\_Full RB(2)

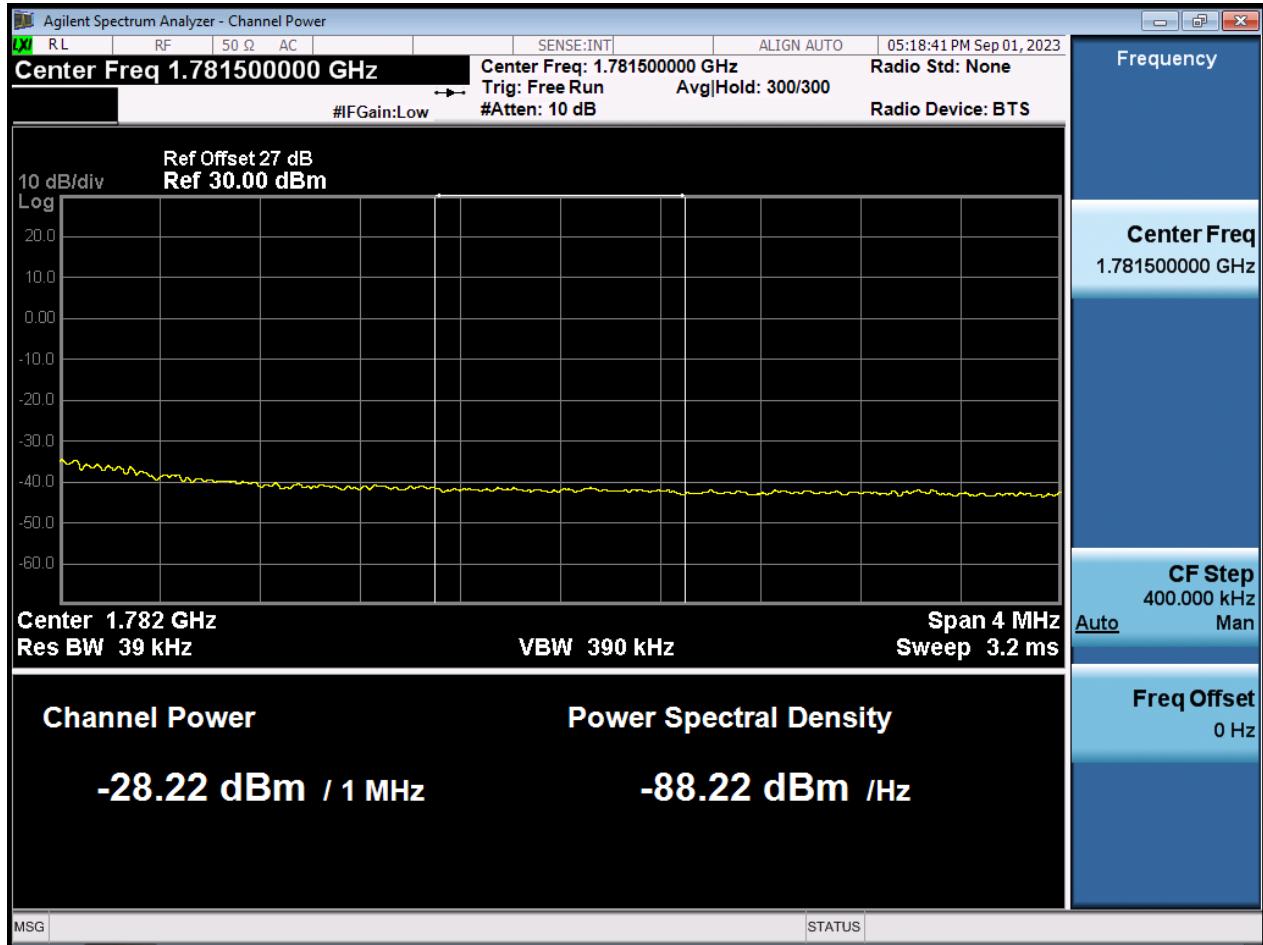


BW20 M\_BandEdge\_Lowest Channel\_QPSK\_1RB




BW20 M\_BandEdge\_Highest Channel\_QPSK\_1RB




BW1.4 M\_OBW\_Middle Channel\_QPSK\_Full RB

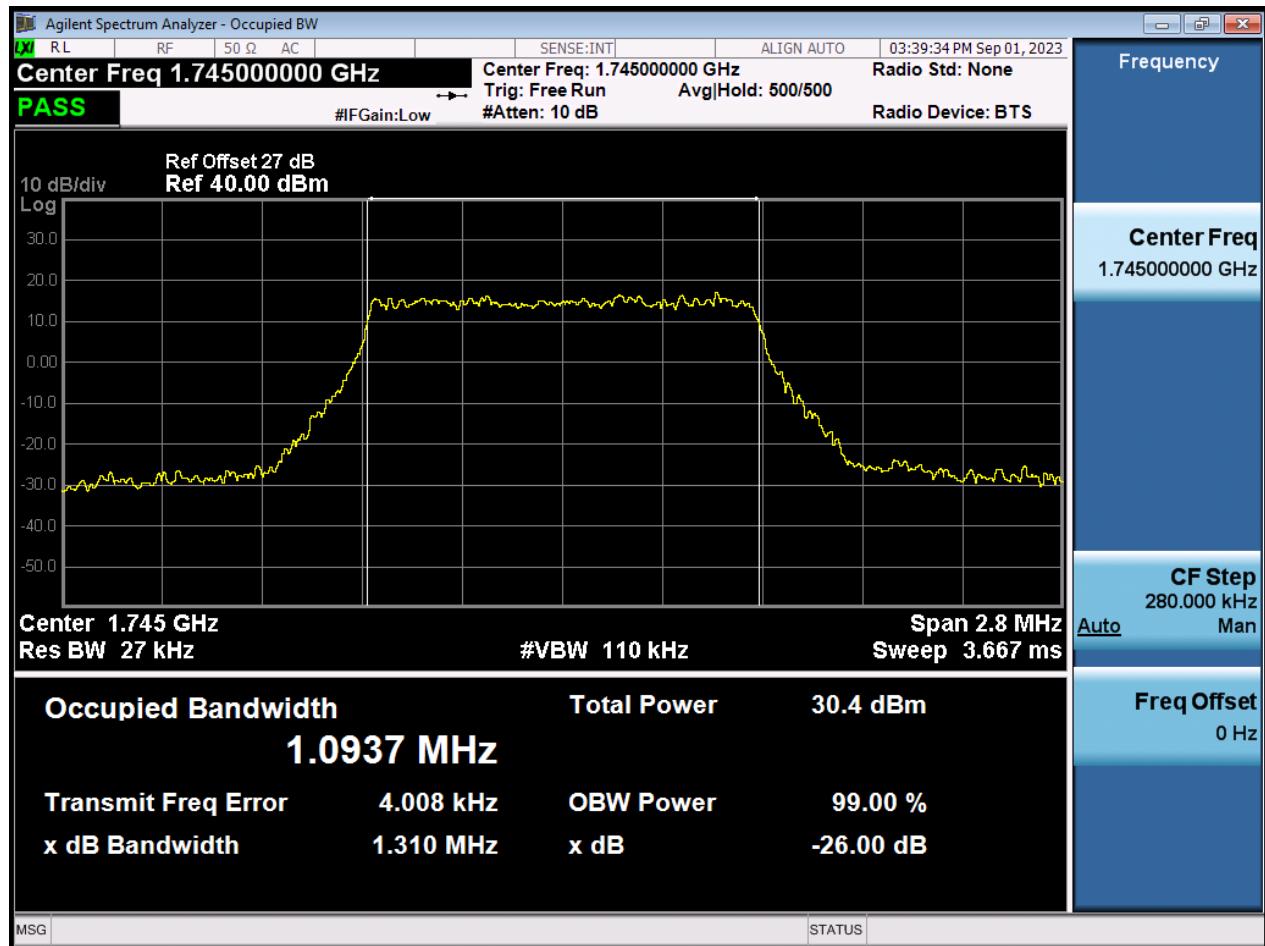


BW1.4 M\_OBW\_Middle Channel\_16QAM\_Full RB

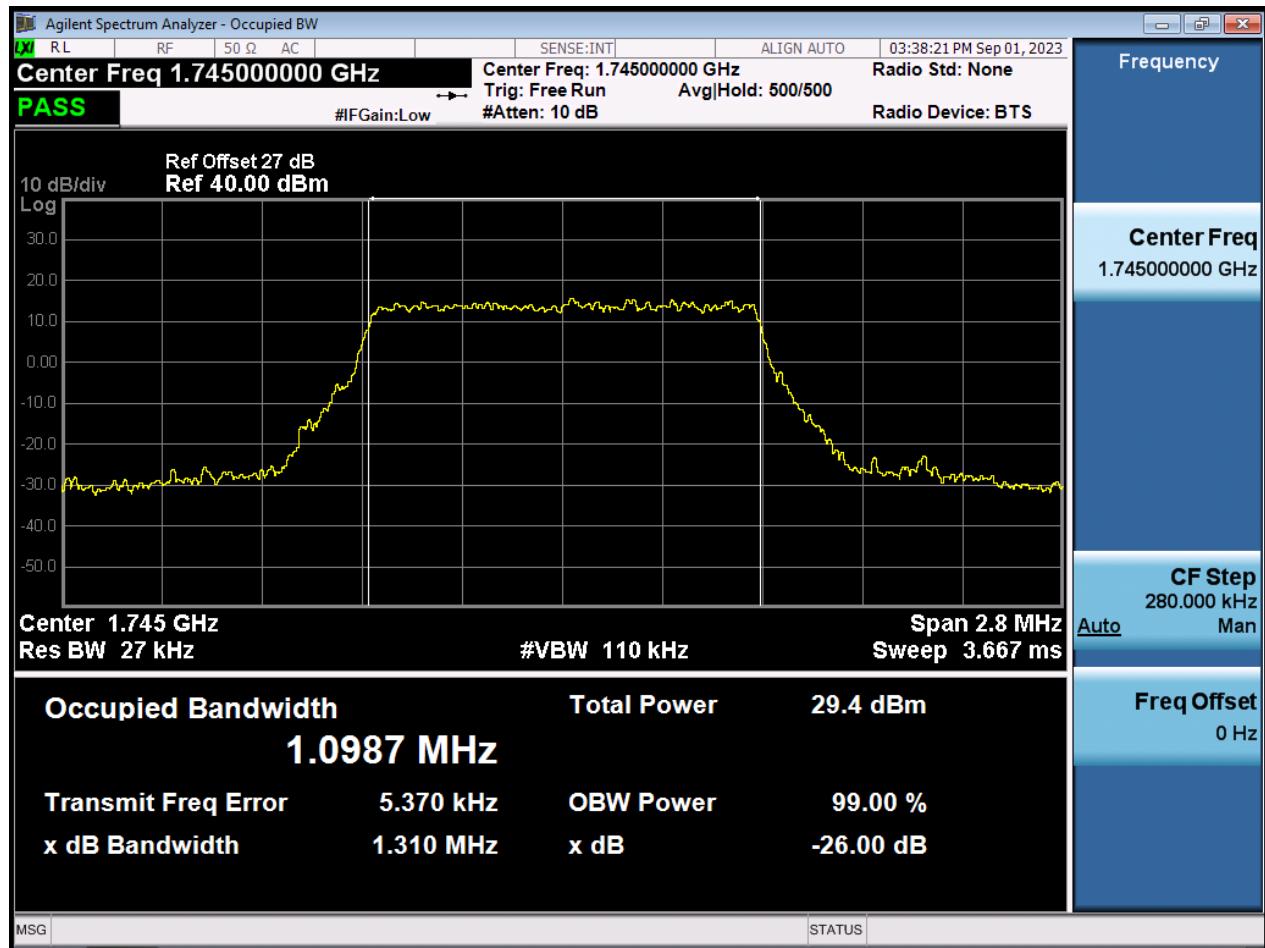


BW1.4 M\_OBW\_Middle Channel\_64QAM\_Full RB

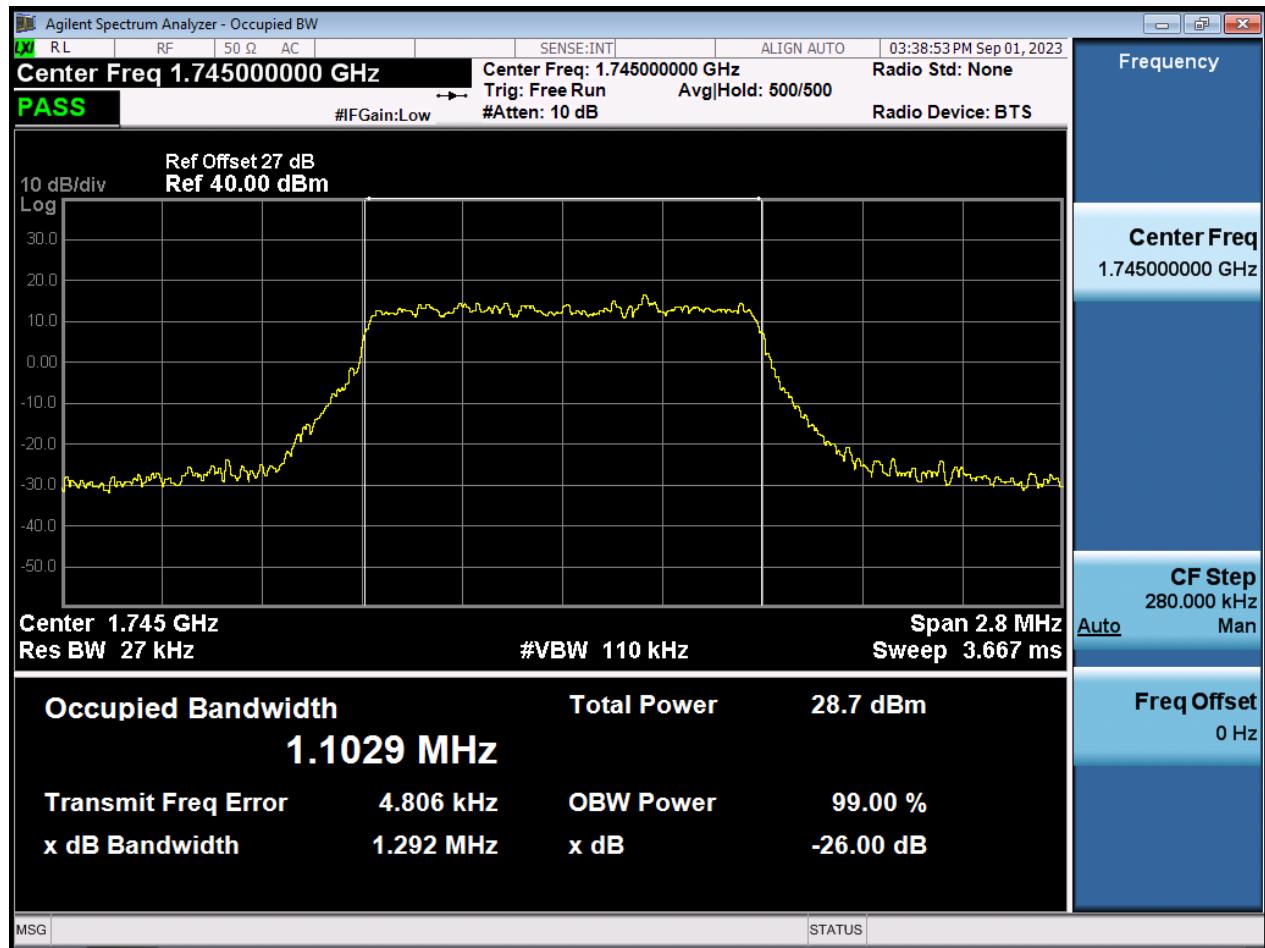


BW1.4 M\_OBW\_Middle Channel\_256QAM\_Full RB

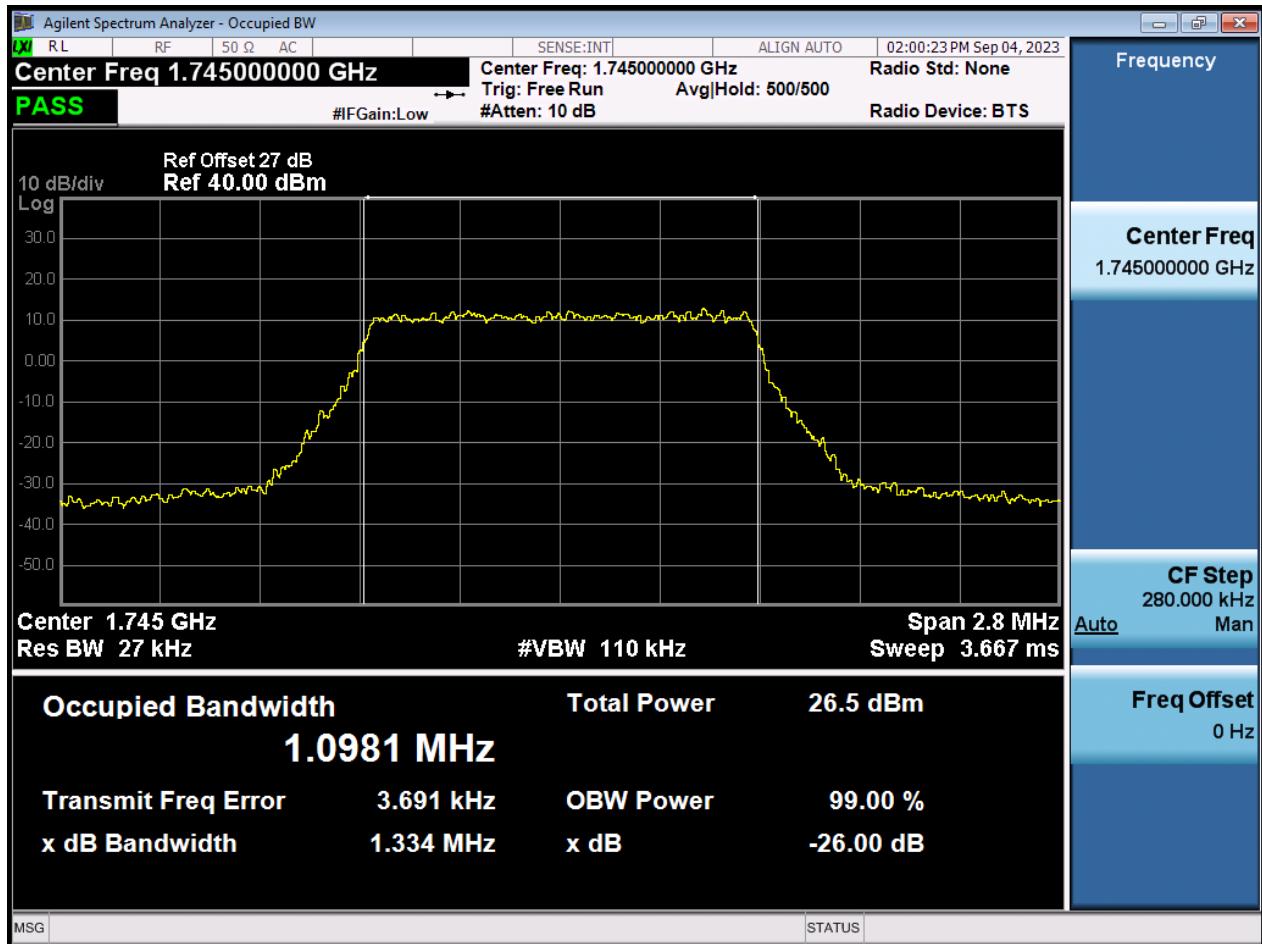


BW3 M\_OBW\_Middle Channel\_QPSK\_Full RB

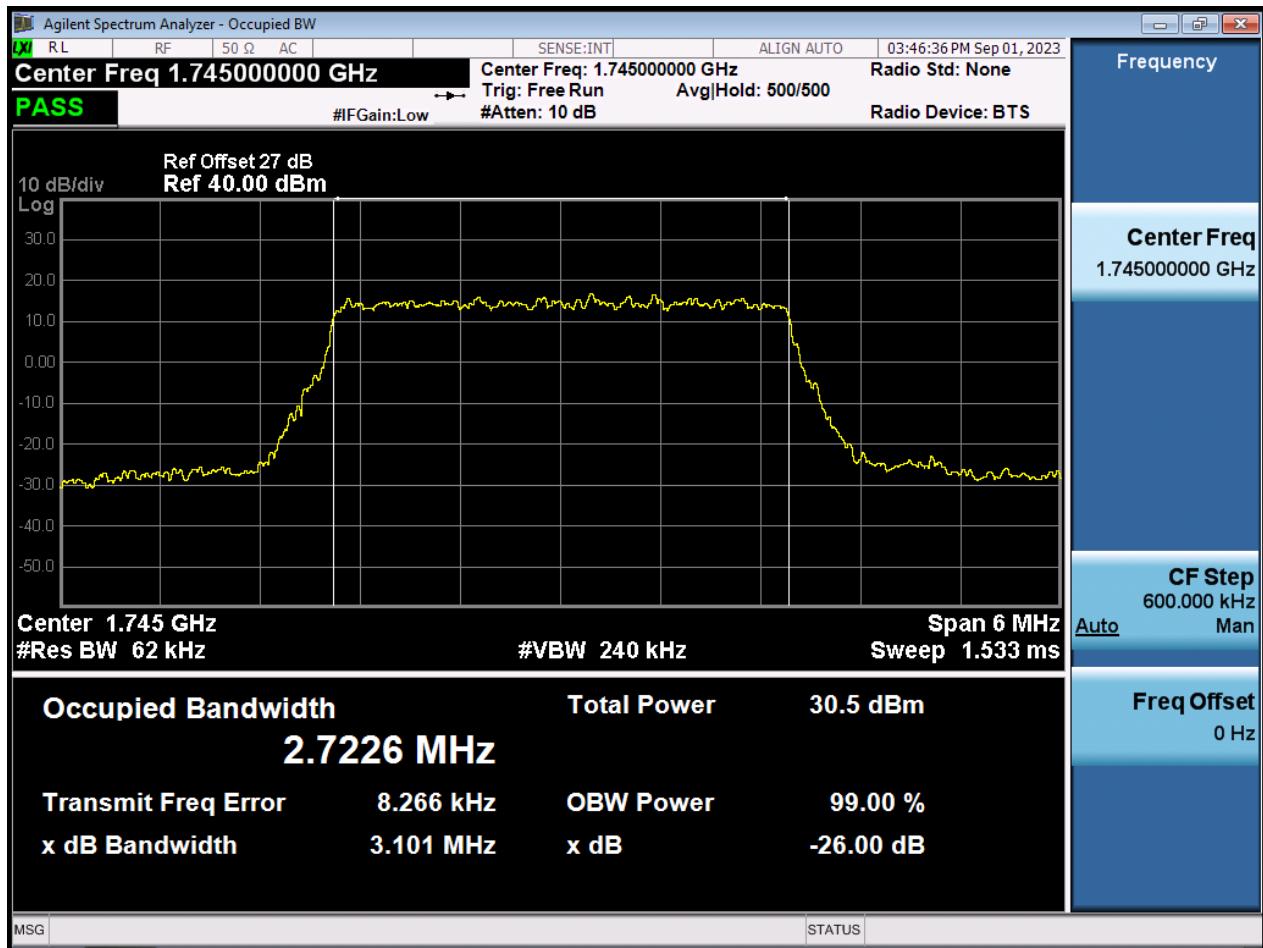


BW3 M\_OBW\_Middle Channel\_16QAM\_Full RB

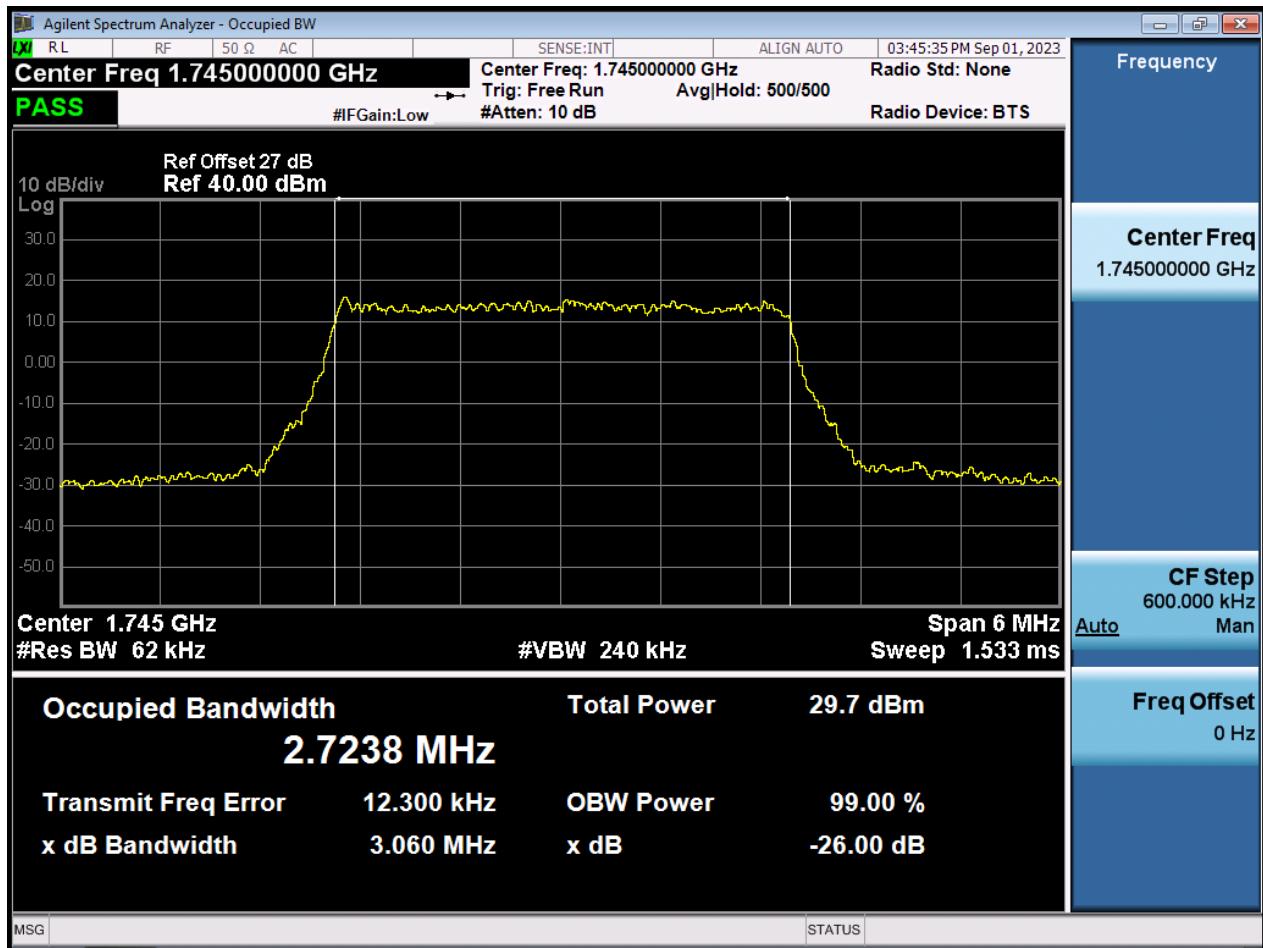


BW3 M\_OBW\_Middle Channel\_64QAM\_Full RB

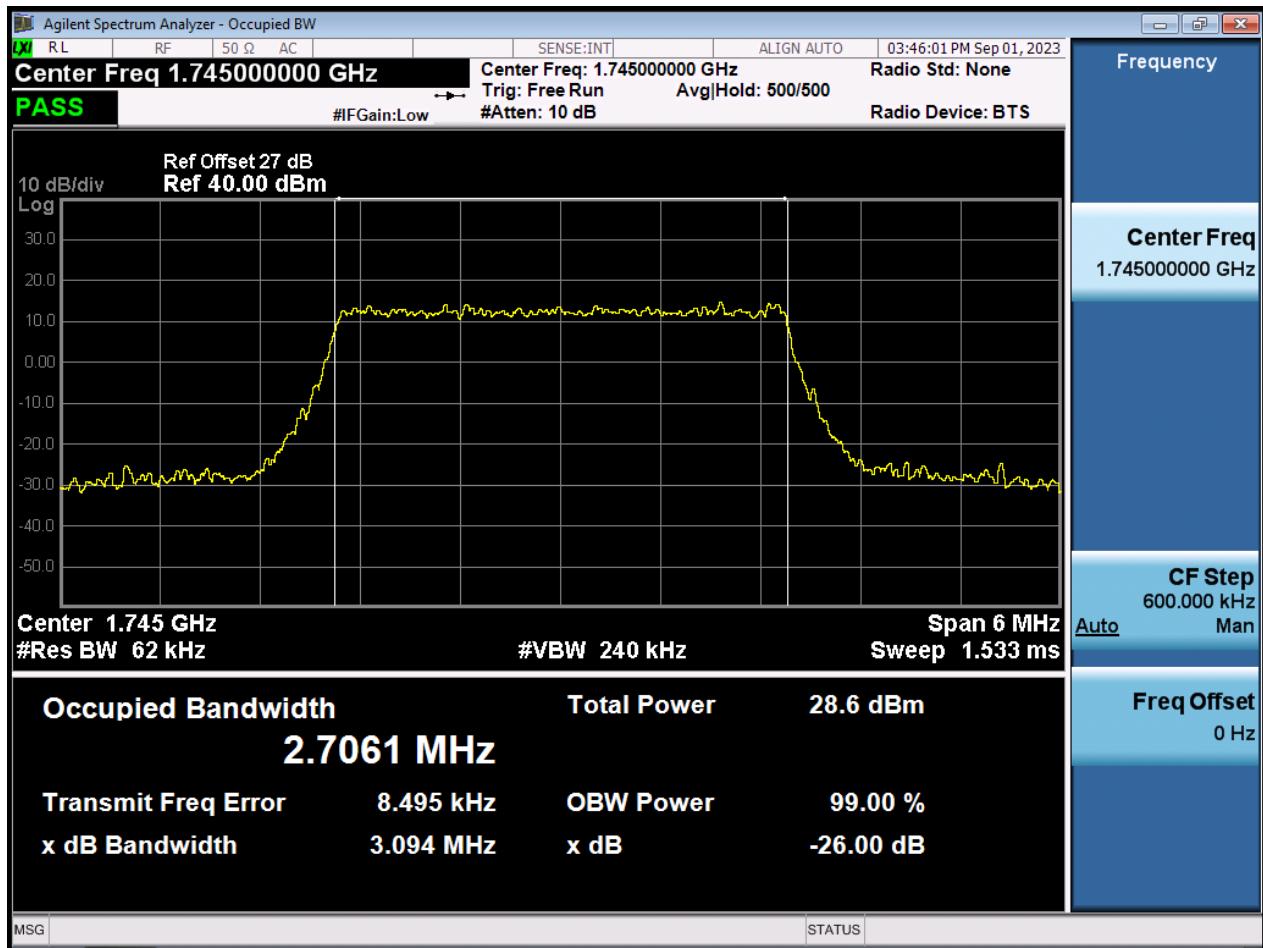


BW3 M\_OBW\_Middle Channel\_256QAM\_Full RB

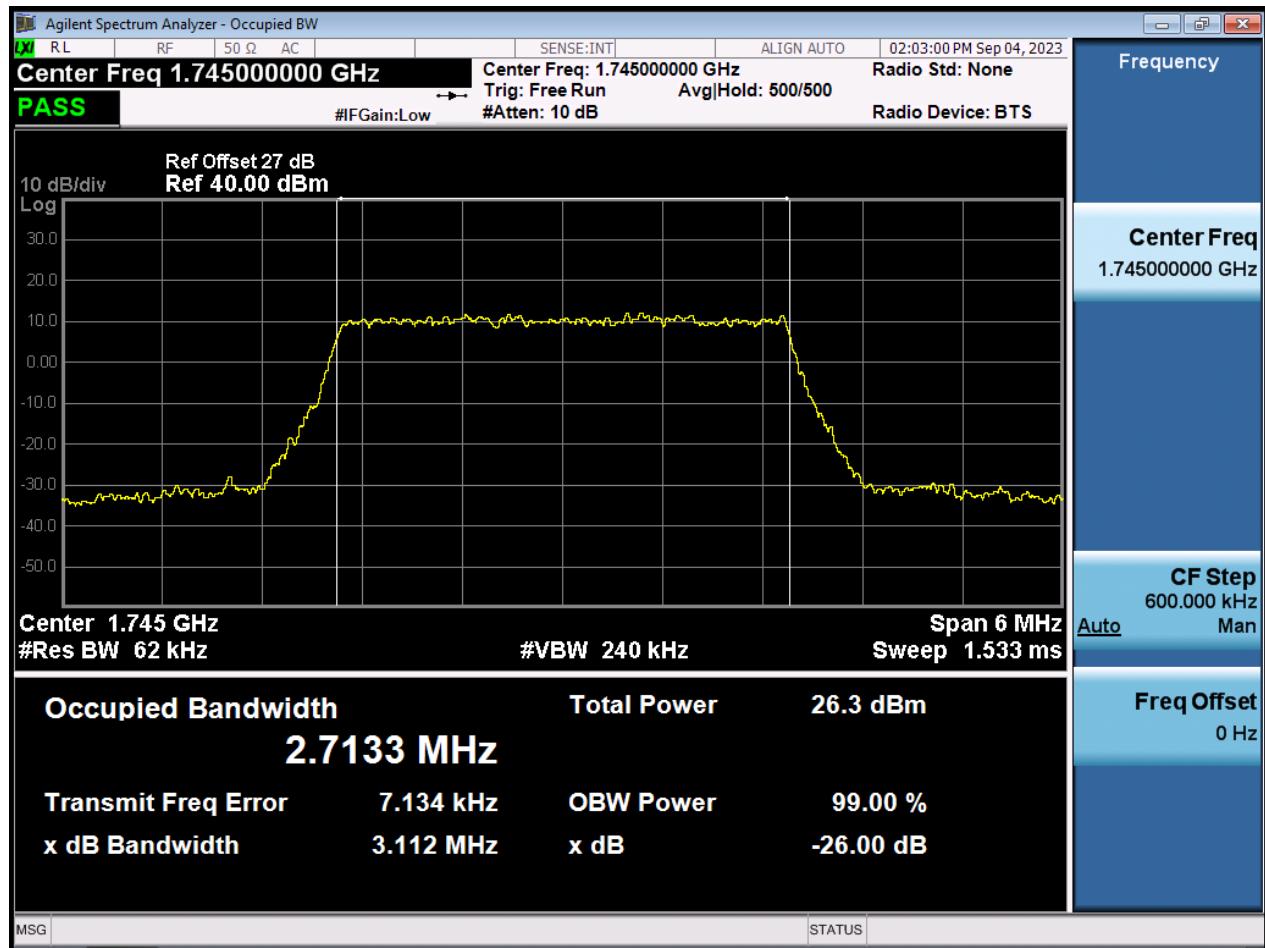


BW5 M\_OBW\_Middle Channel\_QPSK\_Full RB

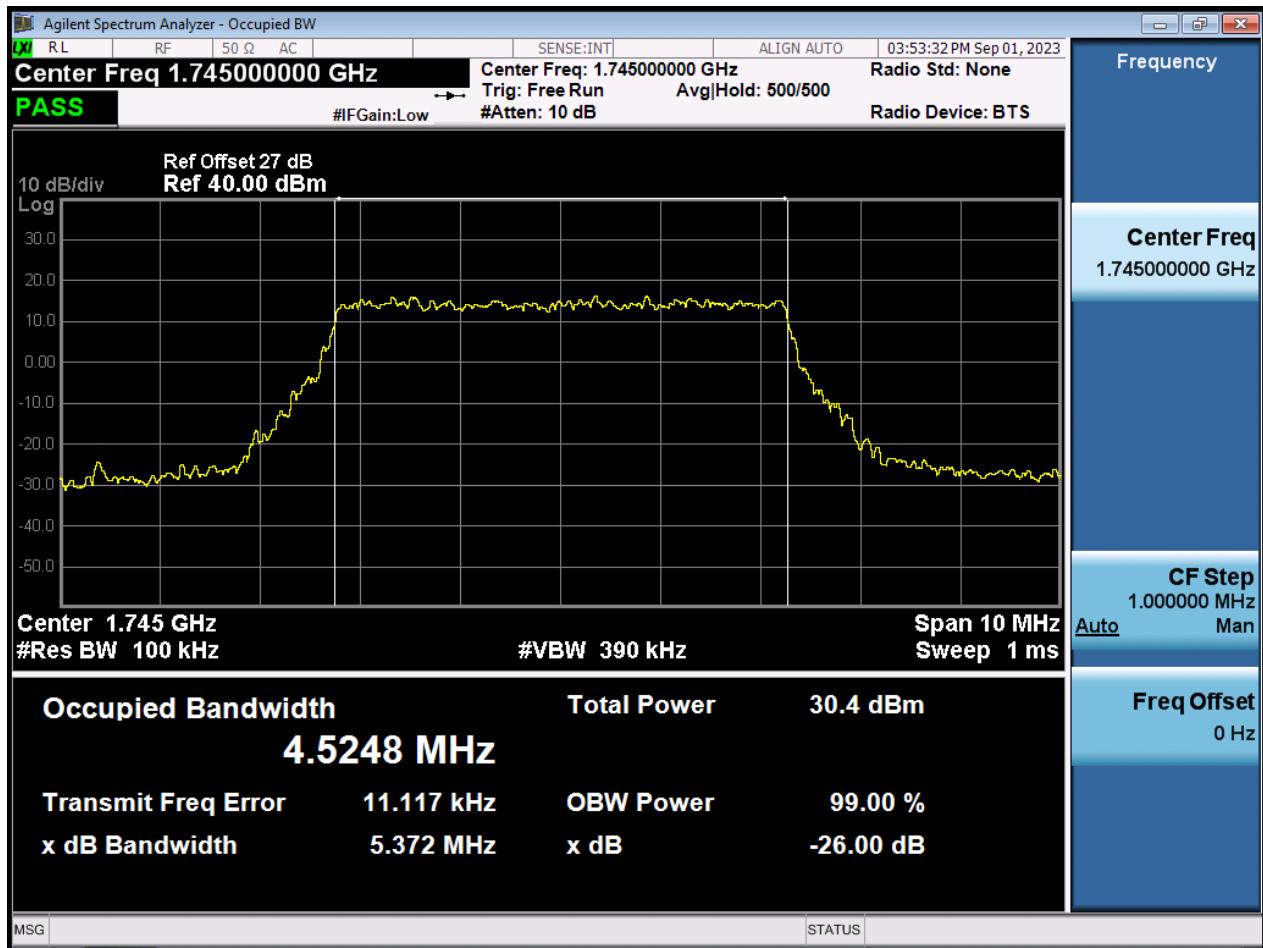


BW5 M\_OBW\_Middle Channel\_16QAM\_Full RB

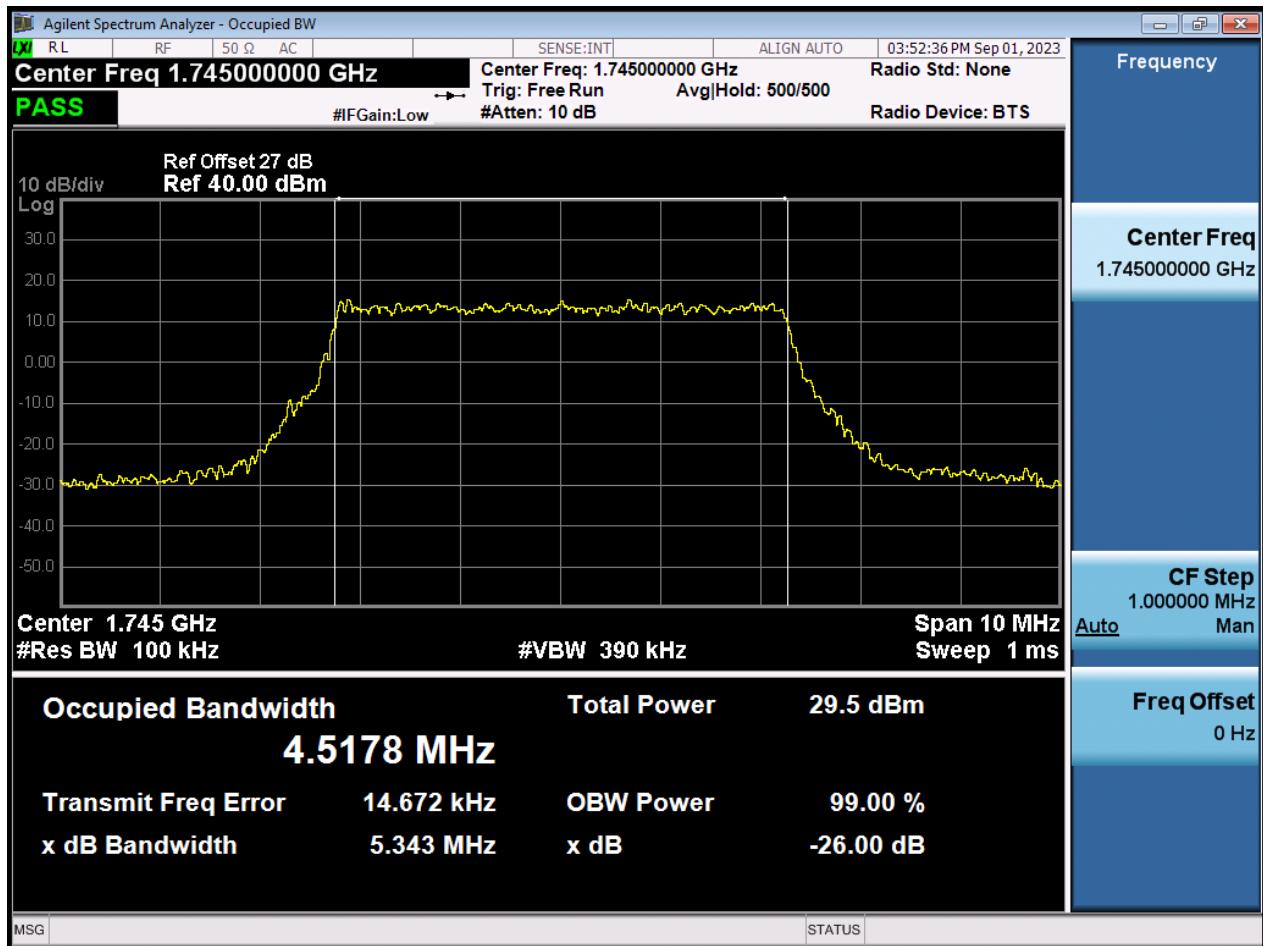


BW5 M\_OBW\_Middle Channel\_64QAM\_Full RB

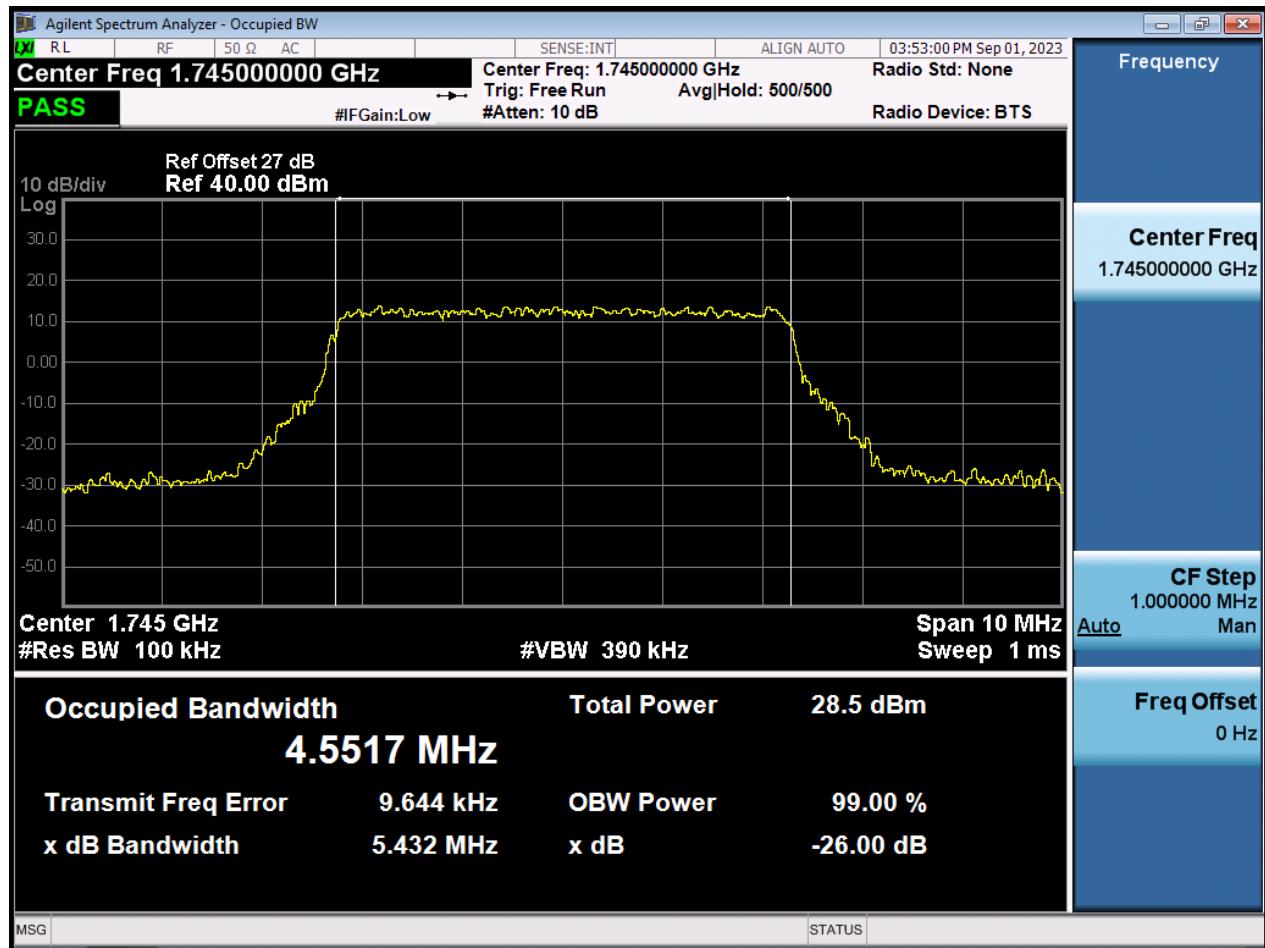


BW5 M\_OBW\_Middle Channel\_256QAM\_Full RB

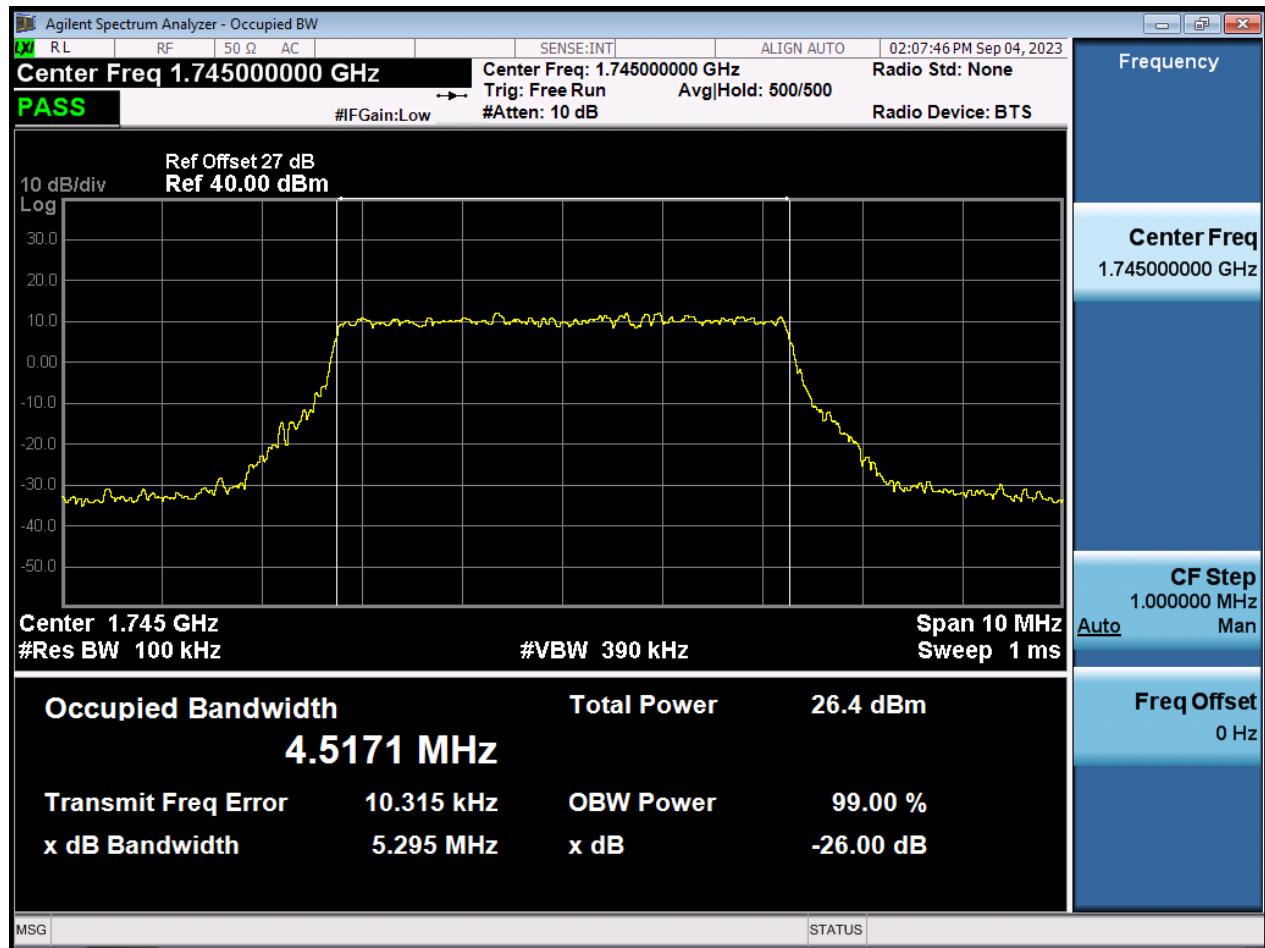


BW10 M\_OBW\_Middle Channel\_QPSK\_Full RB

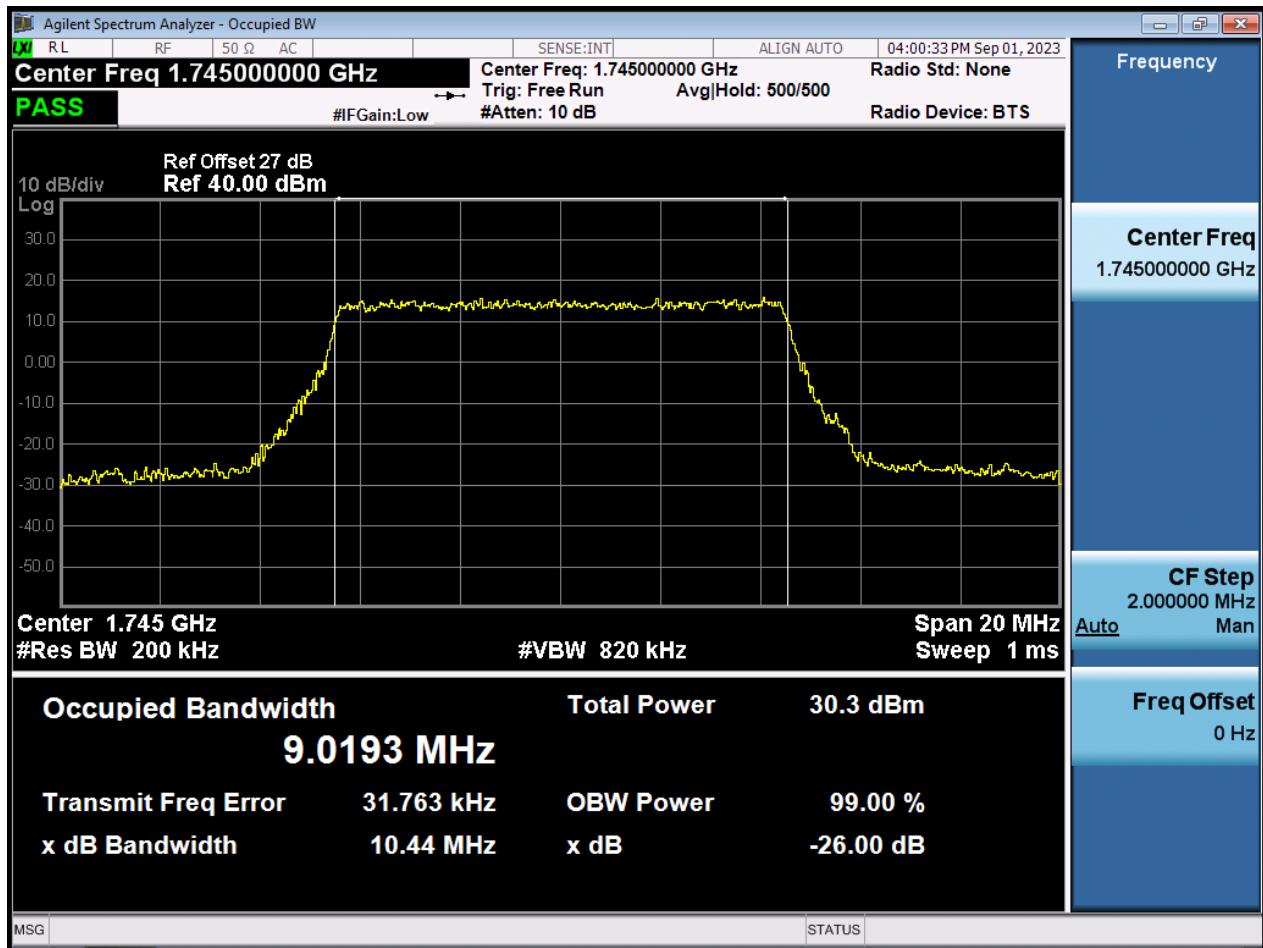


BW10 M\_OBW\_Middle Channel\_16QAM\_Full RB

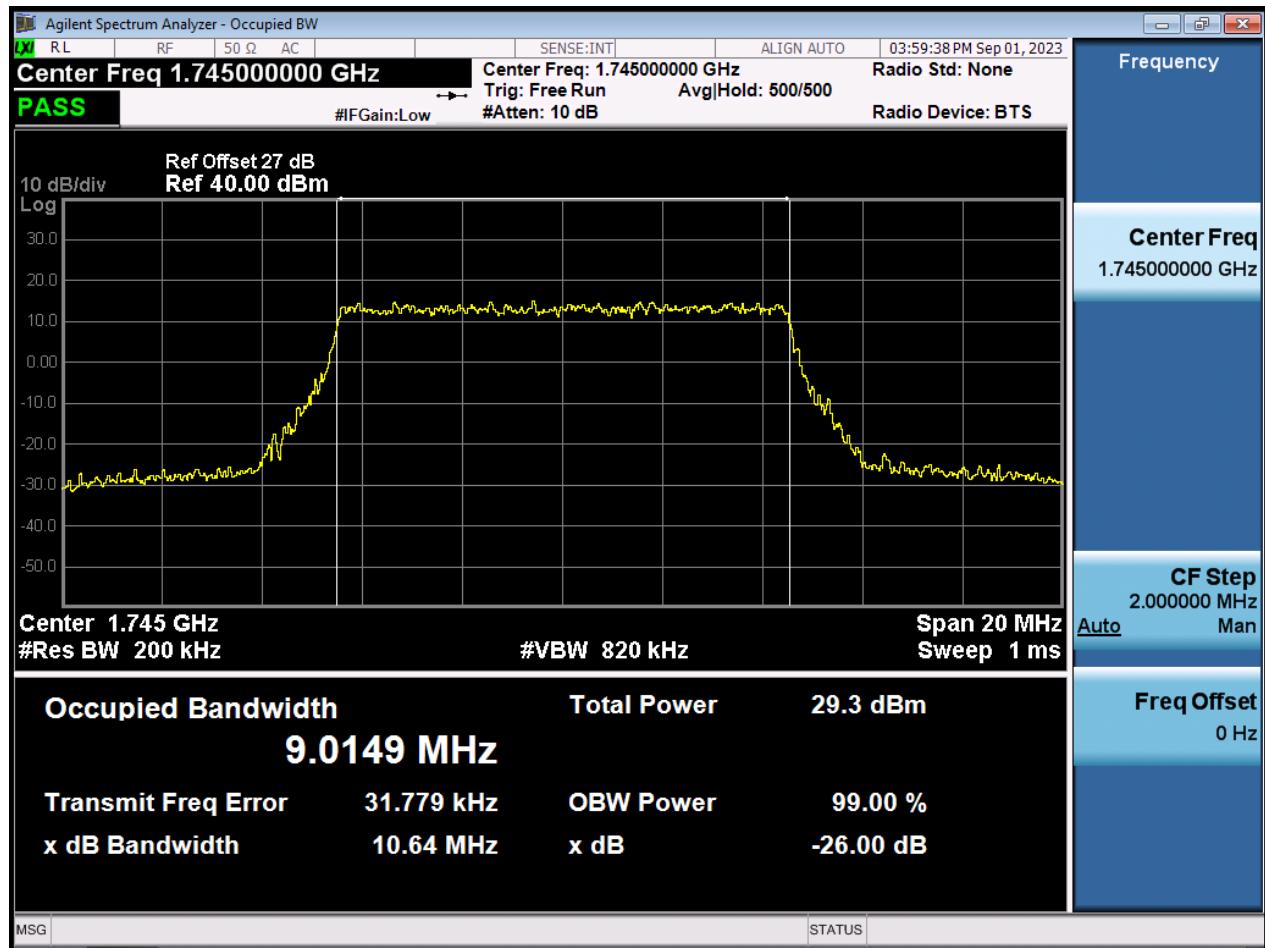


BW10 M\_OBW\_Middle Channel\_64QAM\_Full RB

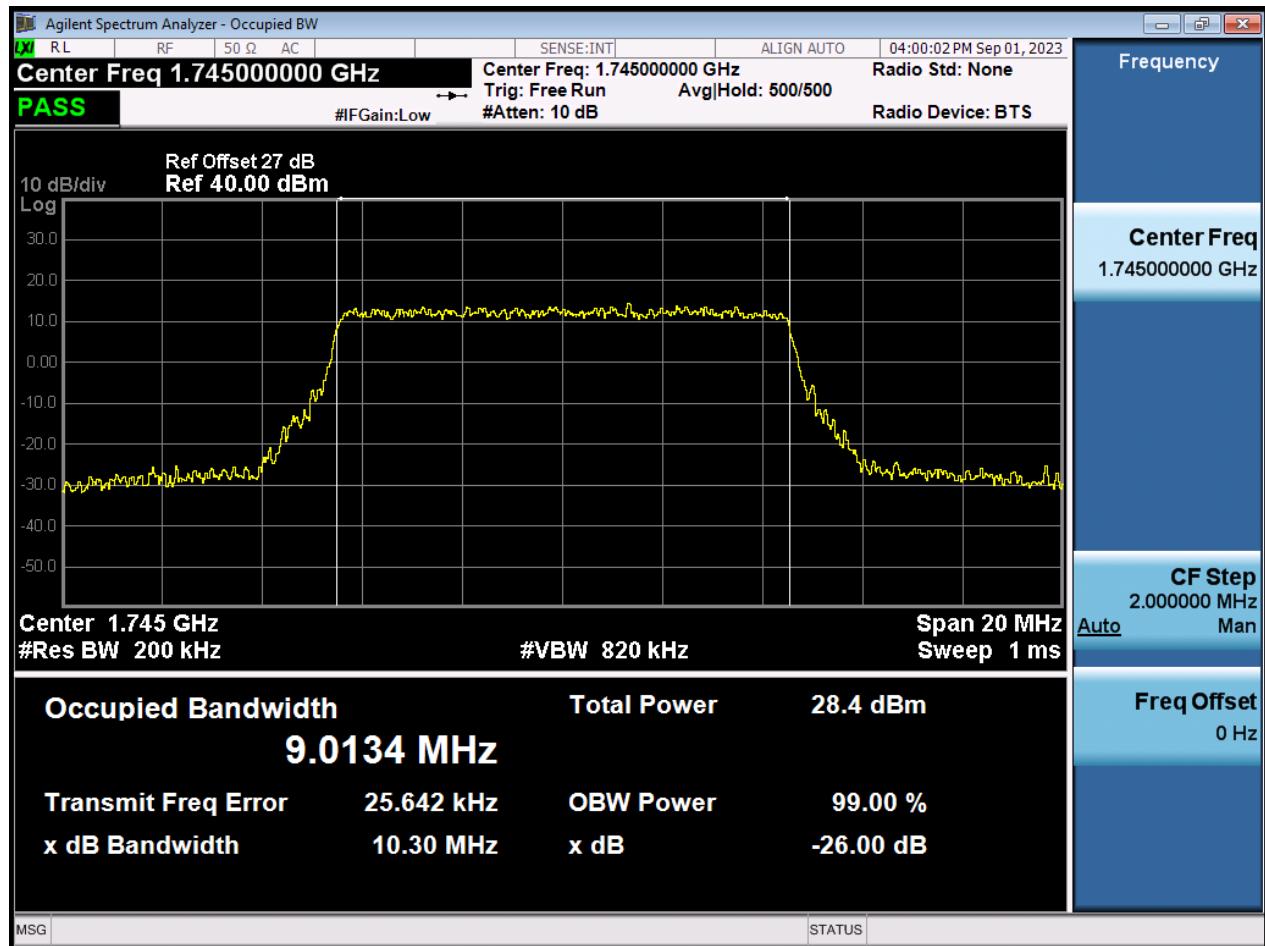


BW10 M\_OBW\_Middle Channel\_256QAM\_Full RB

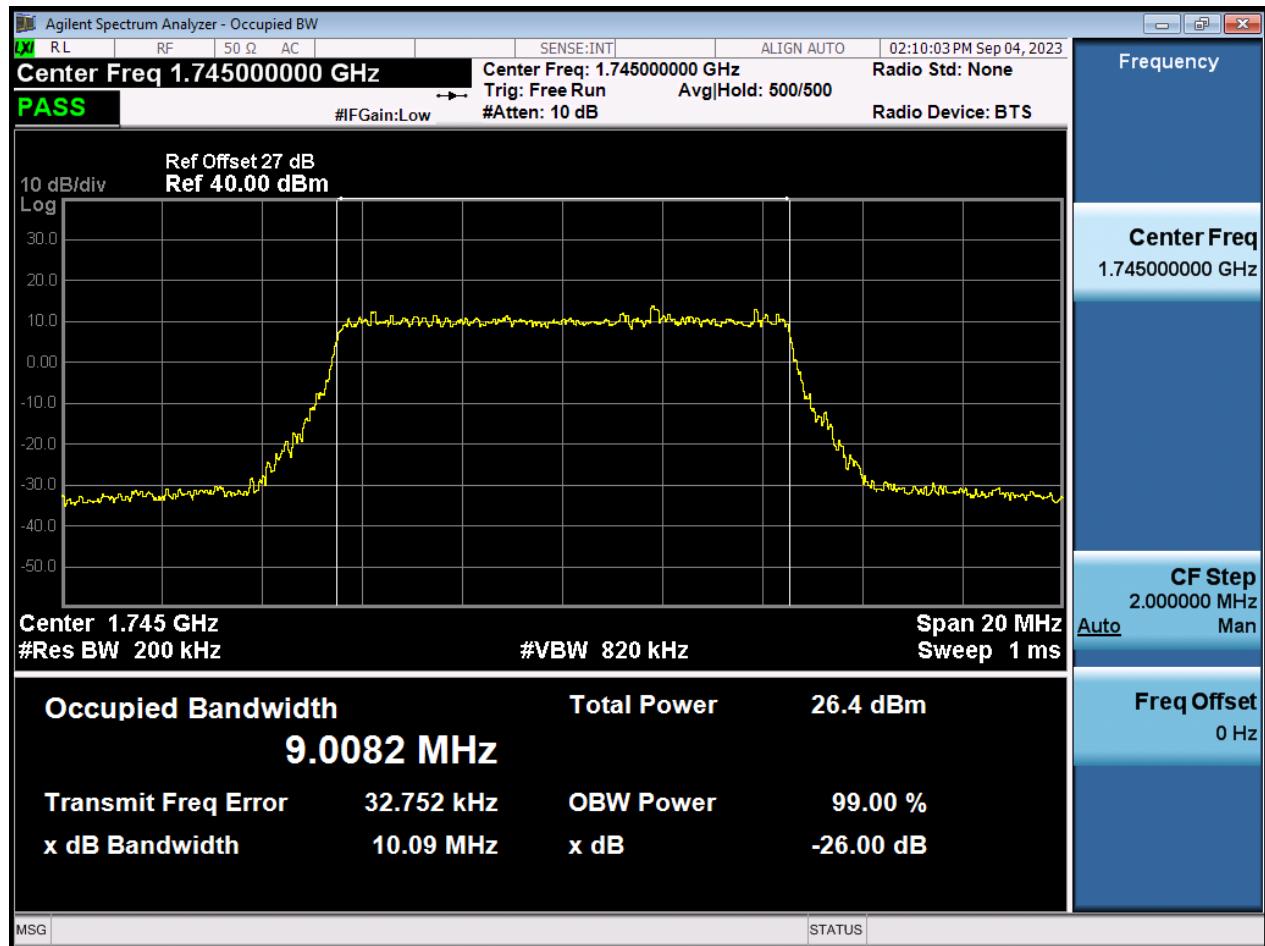


BW15 M\_OBW\_Middle Channel\_QPSK\_Full RB

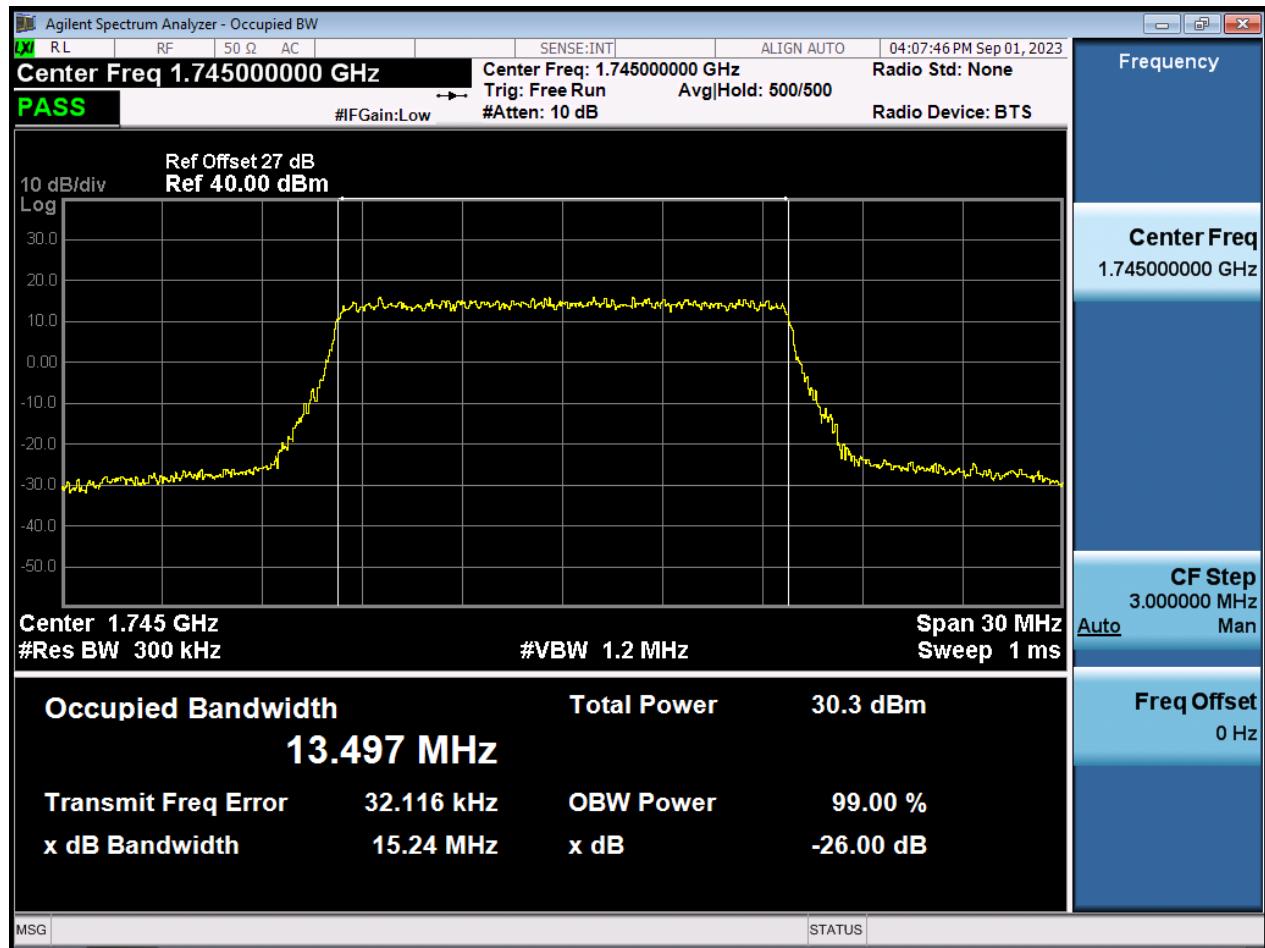


BW15 M\_OBW\_Middle Channel\_16QAM\_Full RB

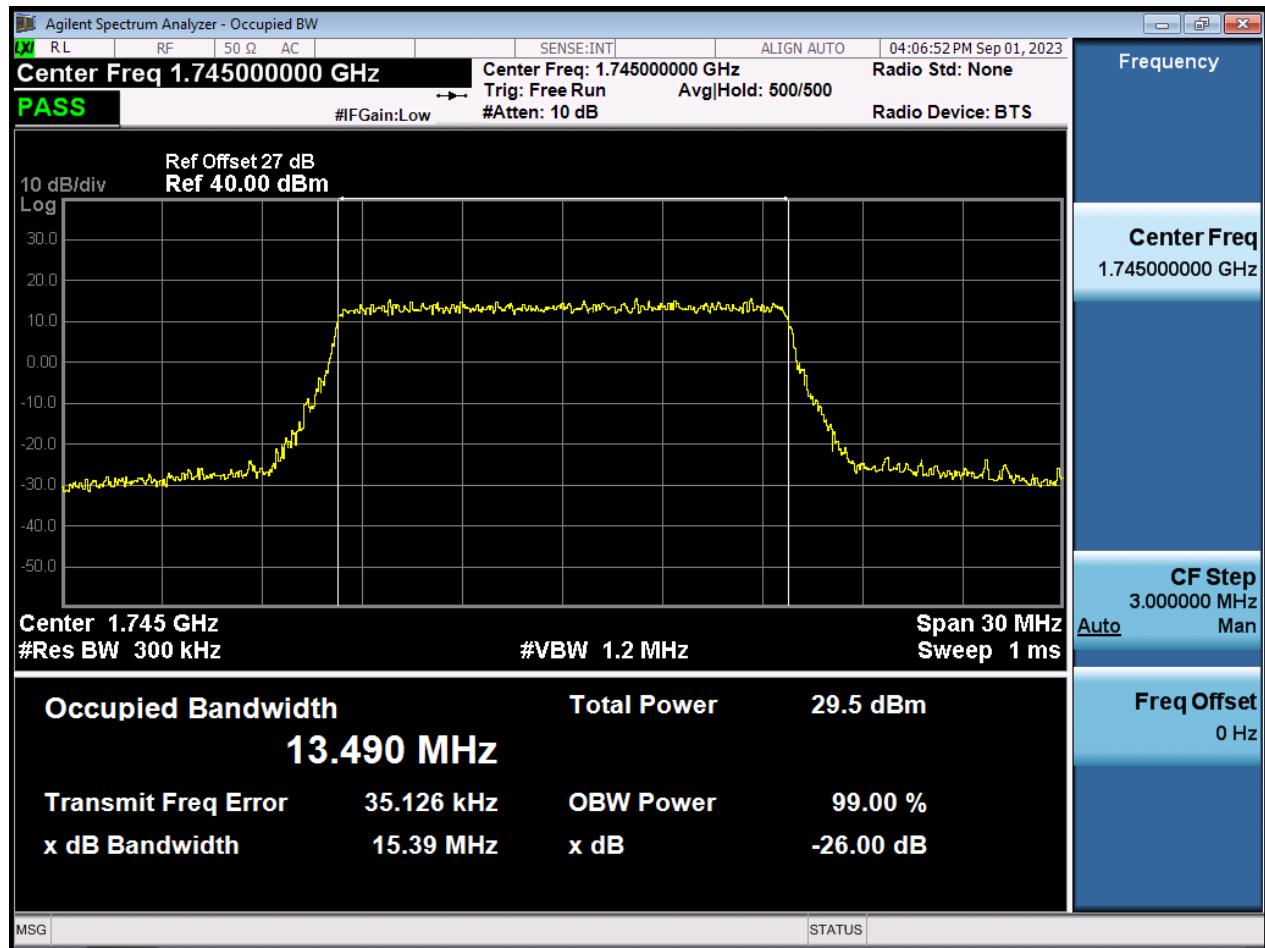


BW15 M\_OBW\_Middle Channel\_64QAM\_Full RB

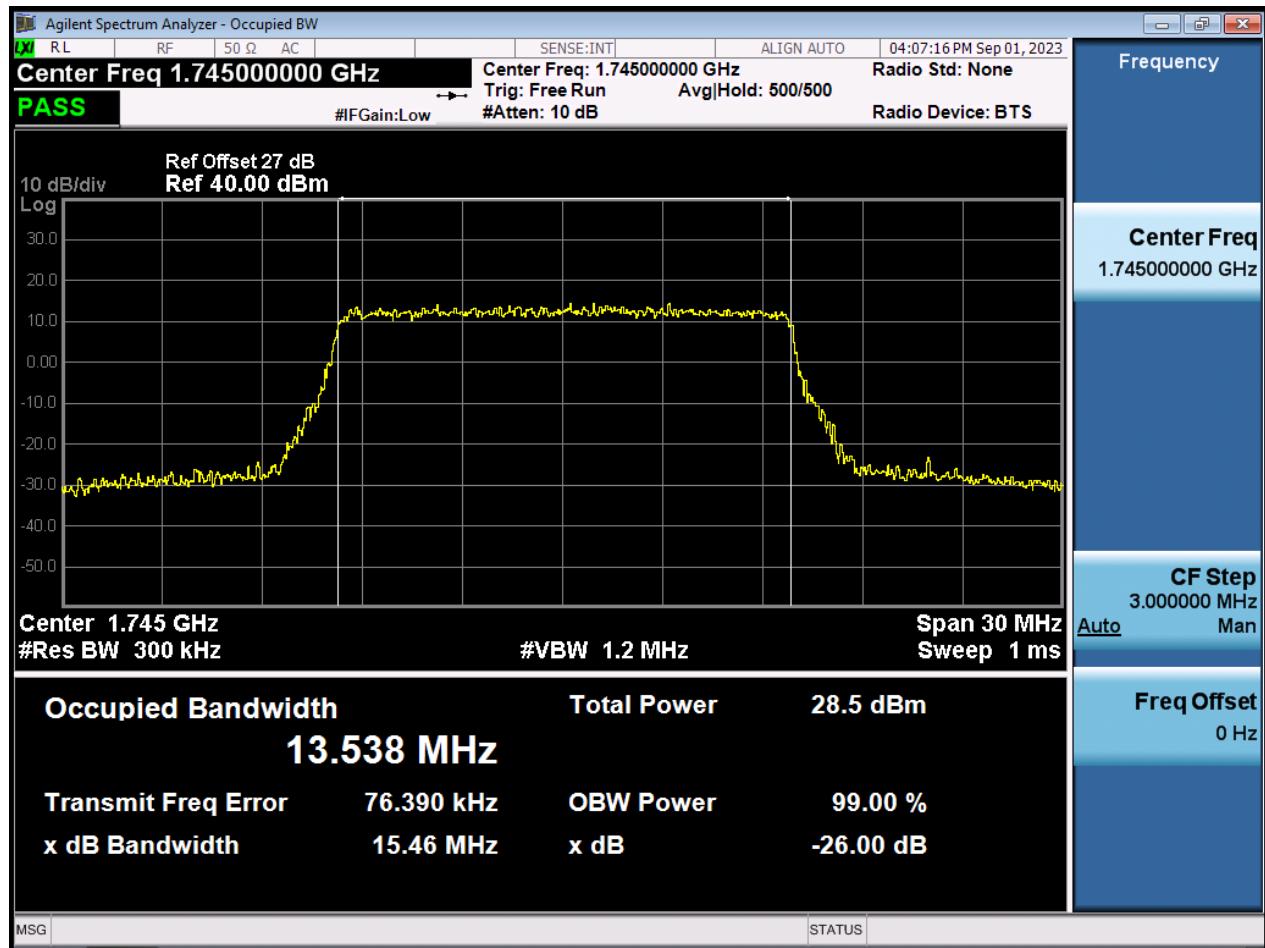


BW15 M\_OBW\_Middle Channel\_256QAM\_Full RB

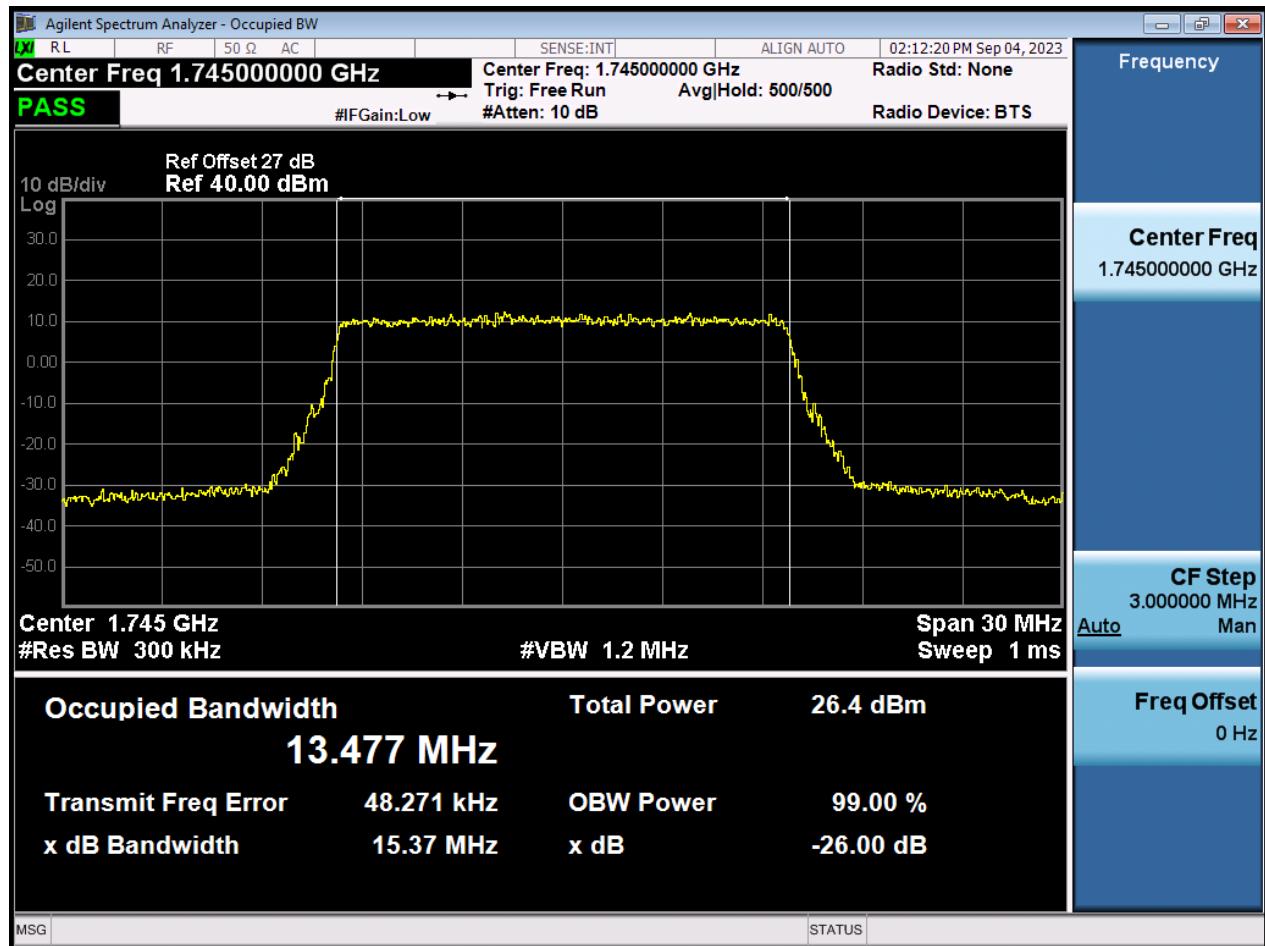


BW20 M\_OBW\_Middle Channel\_QPSK\_Full RB

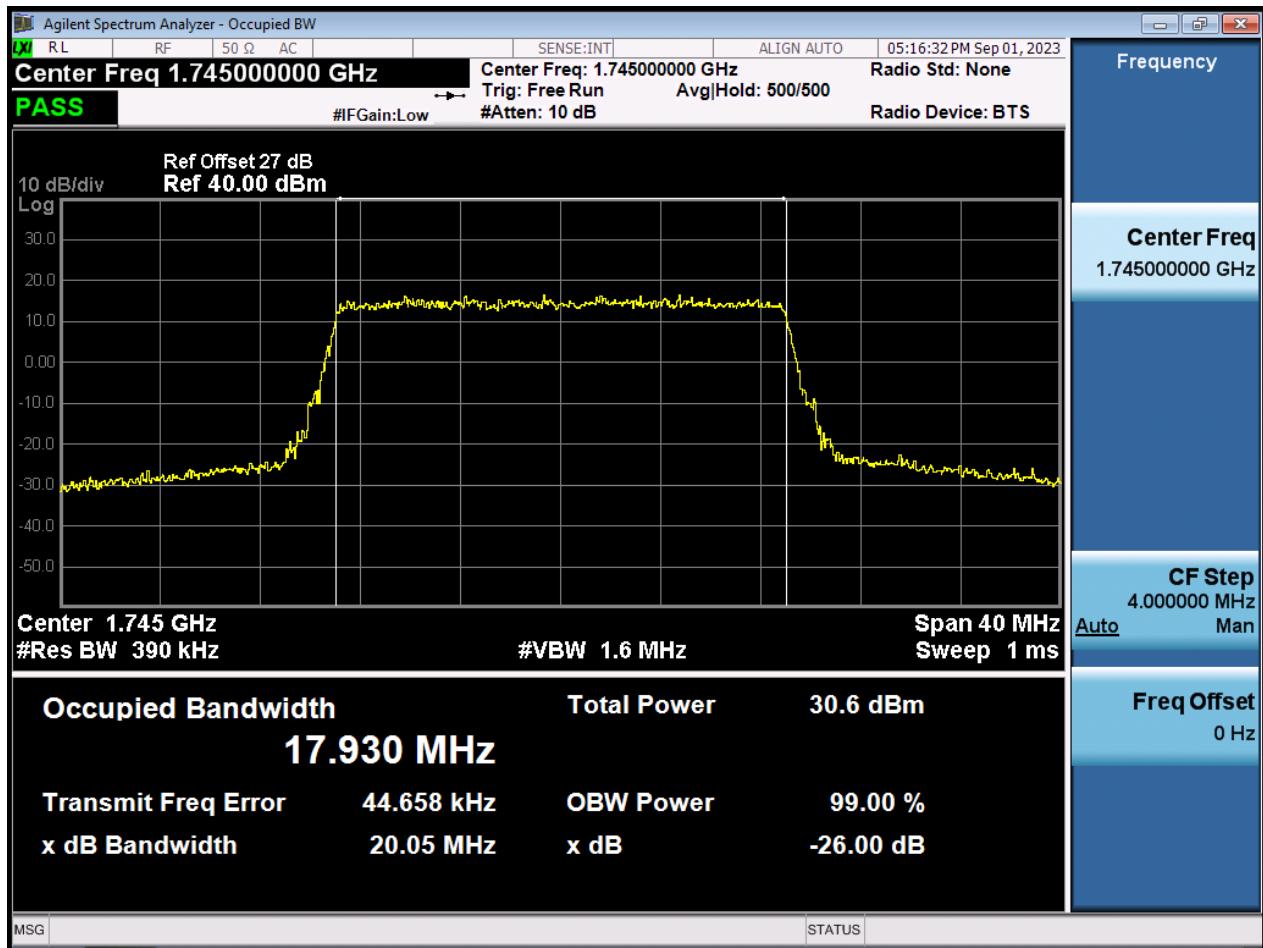


BW20 M\_OBW\_Middle Channel\_16QAM\_Full RB

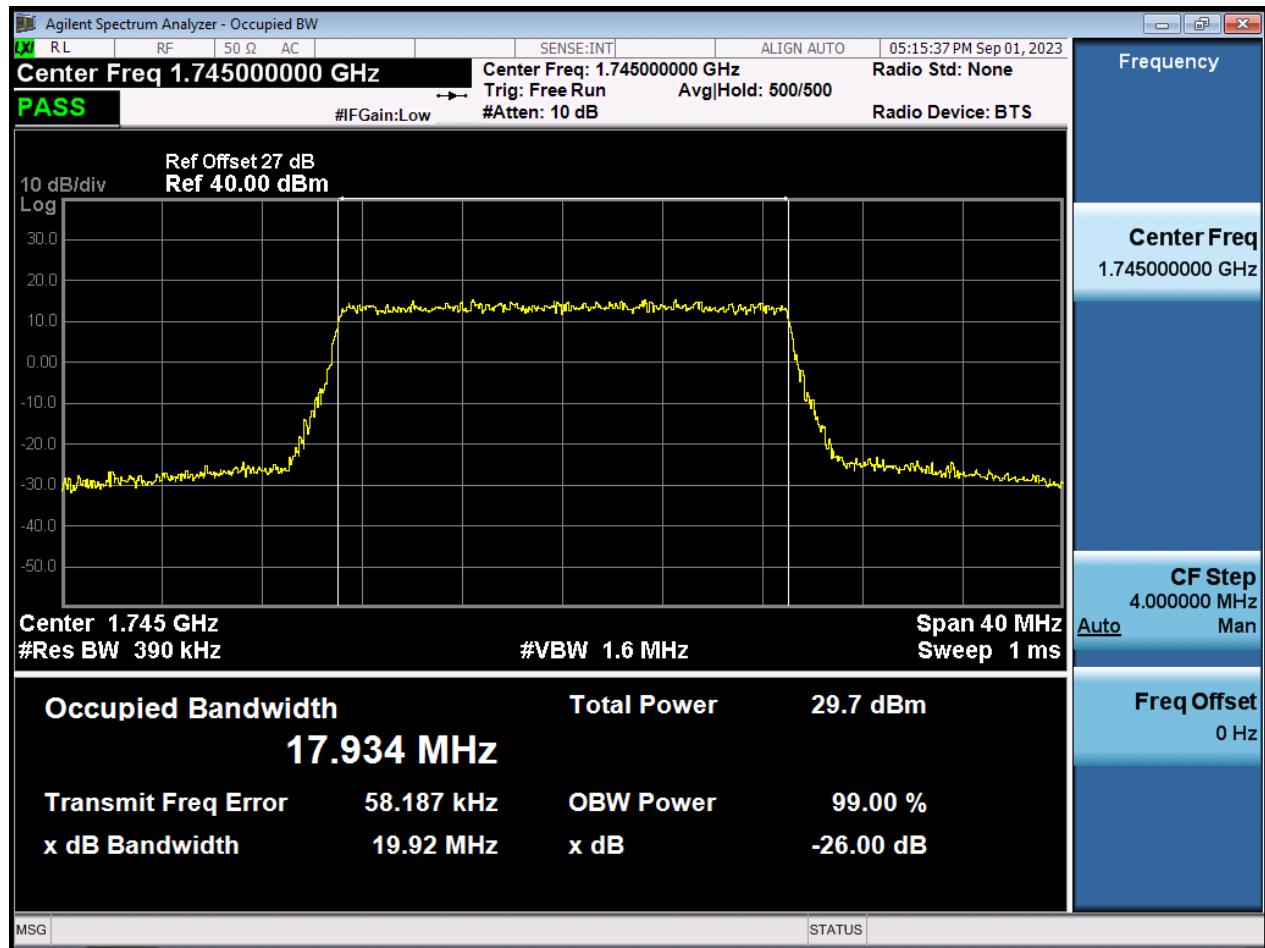


BW20 M\_OBW\_Middle Channel\_64QAM\_Full RB

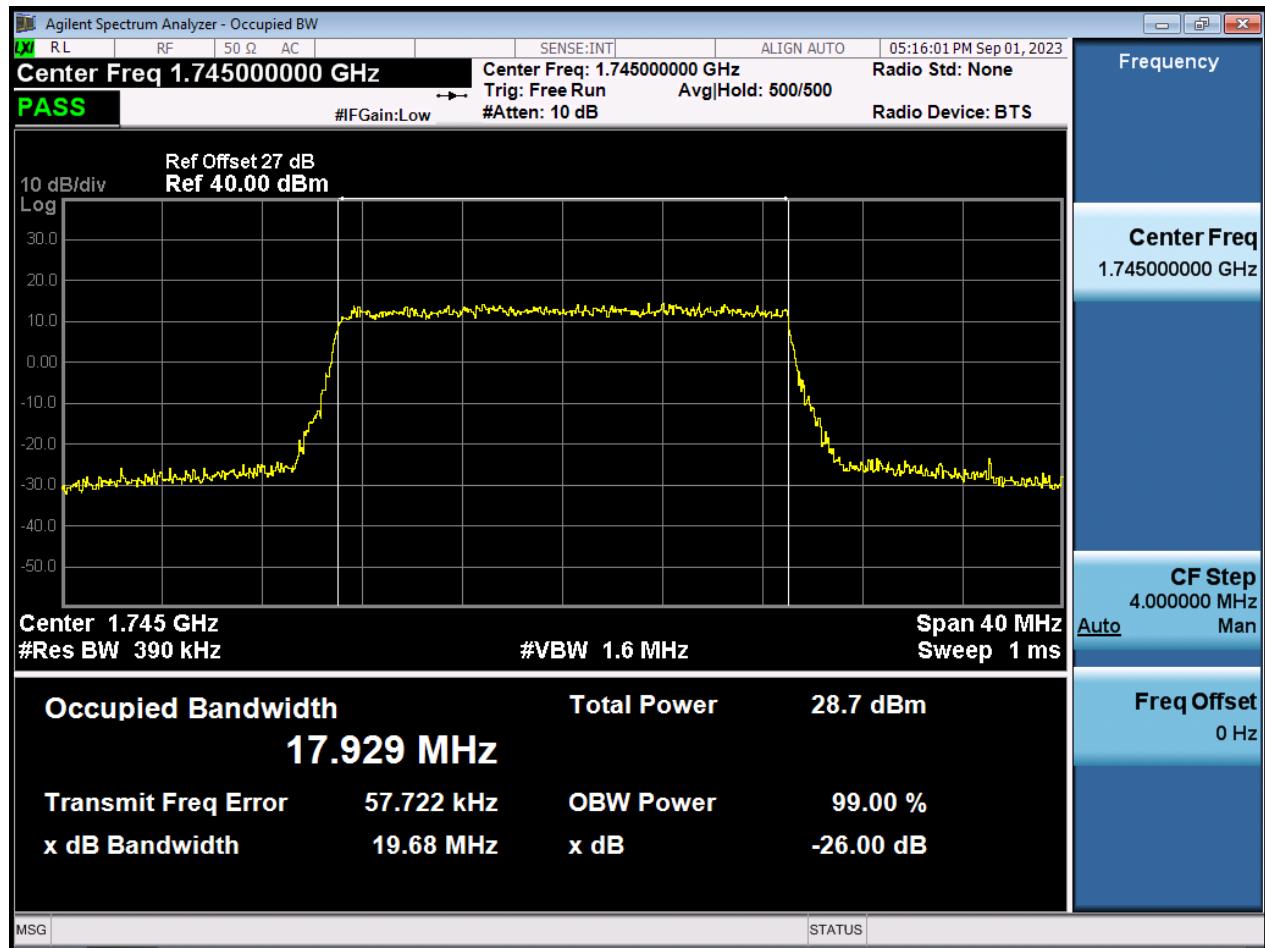


BW20 M\_OBW\_Middle Channel\_256QAM\_Full RB

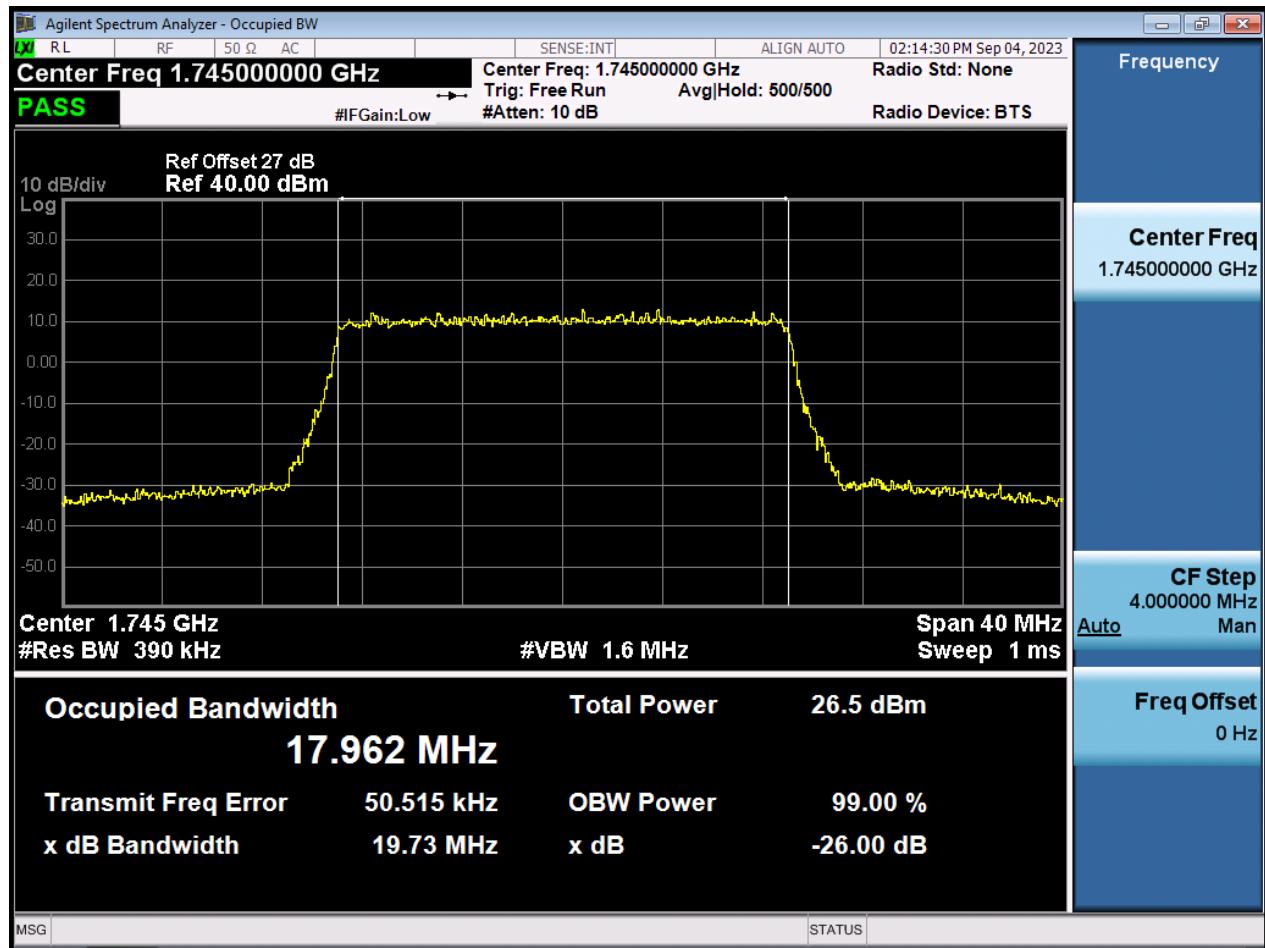


BW1.4 M\_PAR\_Middle Channel\_QPSK\_Full RB

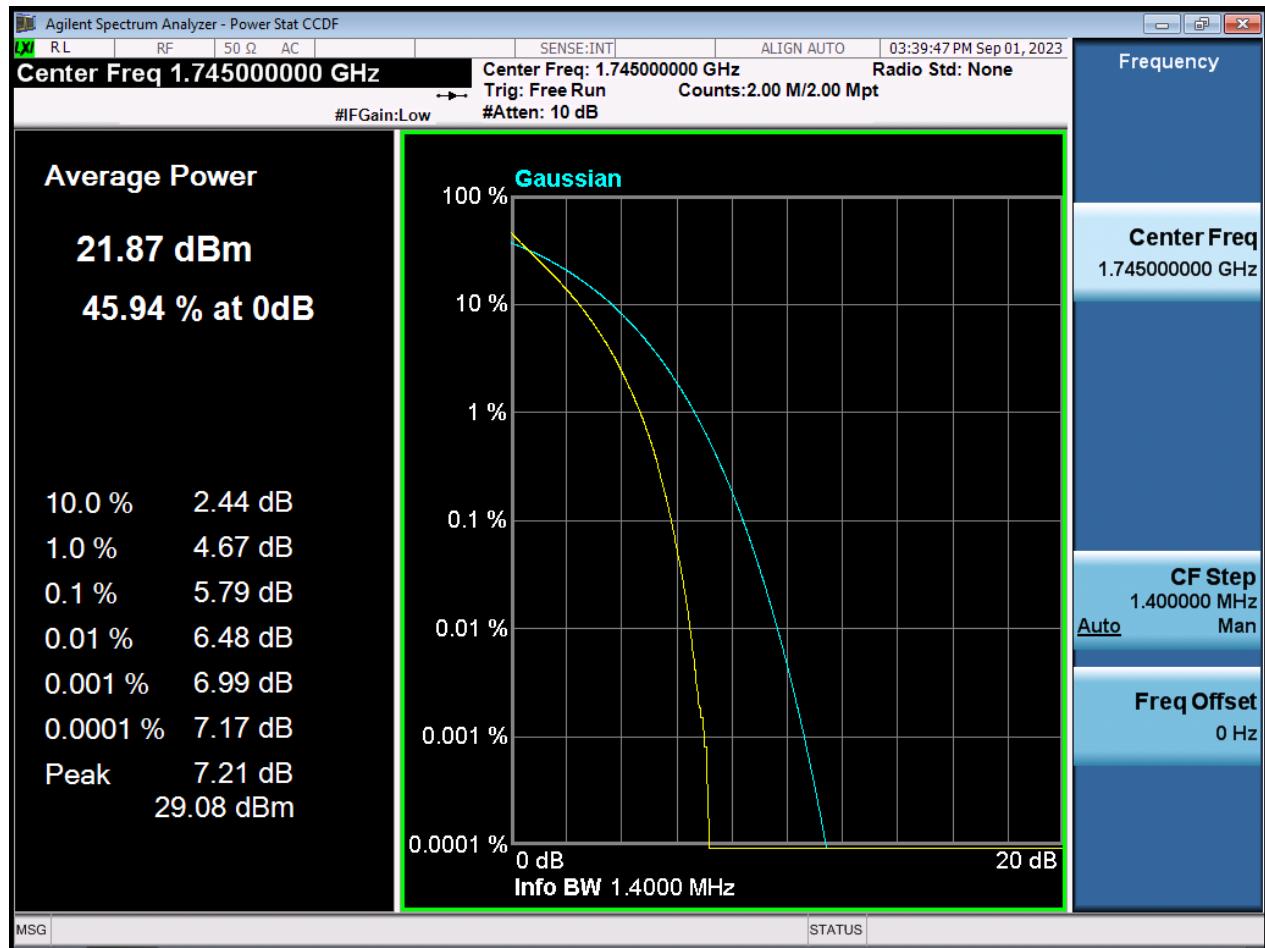


BW1.4 M\_PAR\_Middle Channel\_16QAM\_Full RB

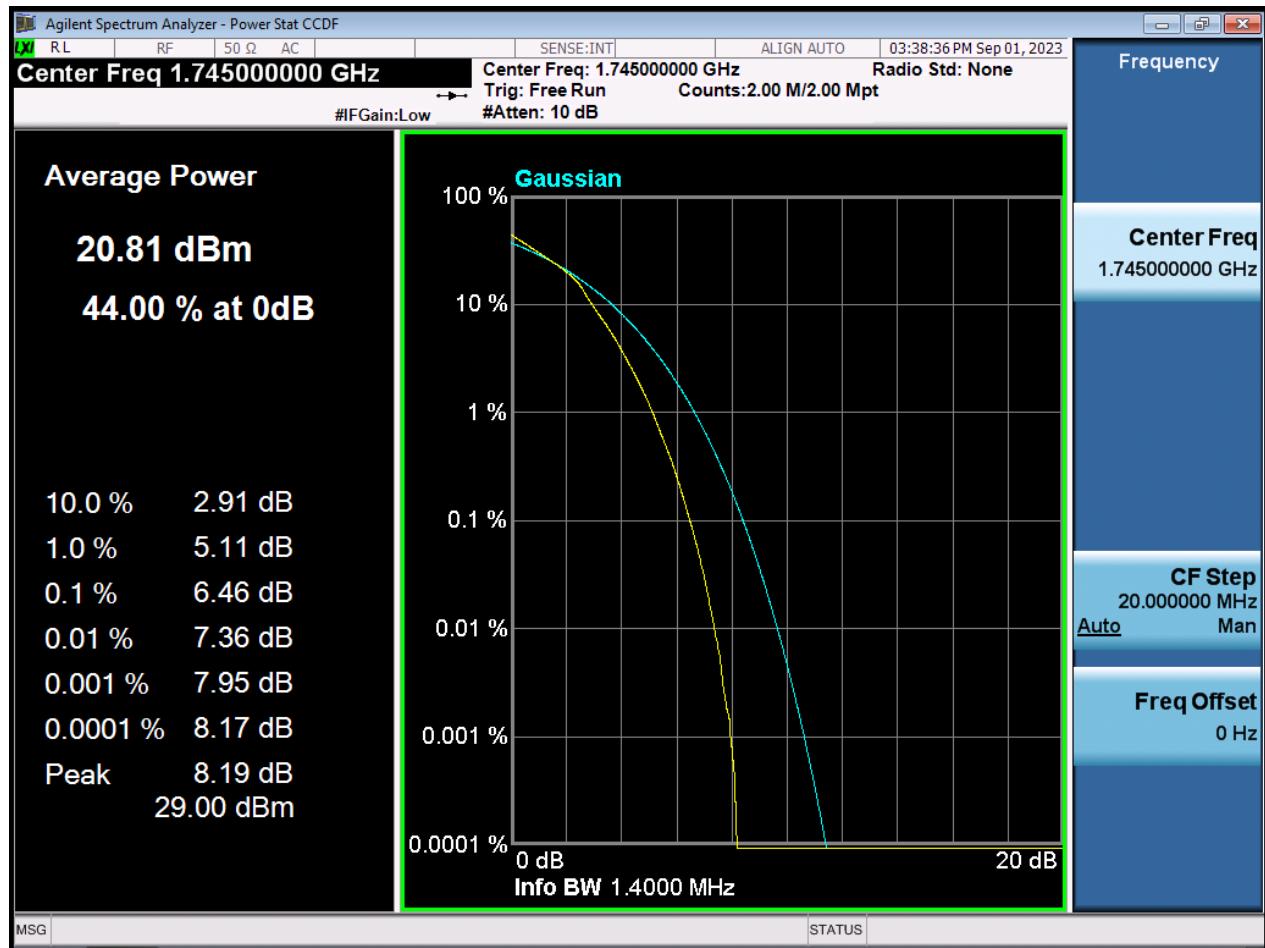


BW1.4 M\_PAR\_Middle Channel\_64QAM\_Full RB

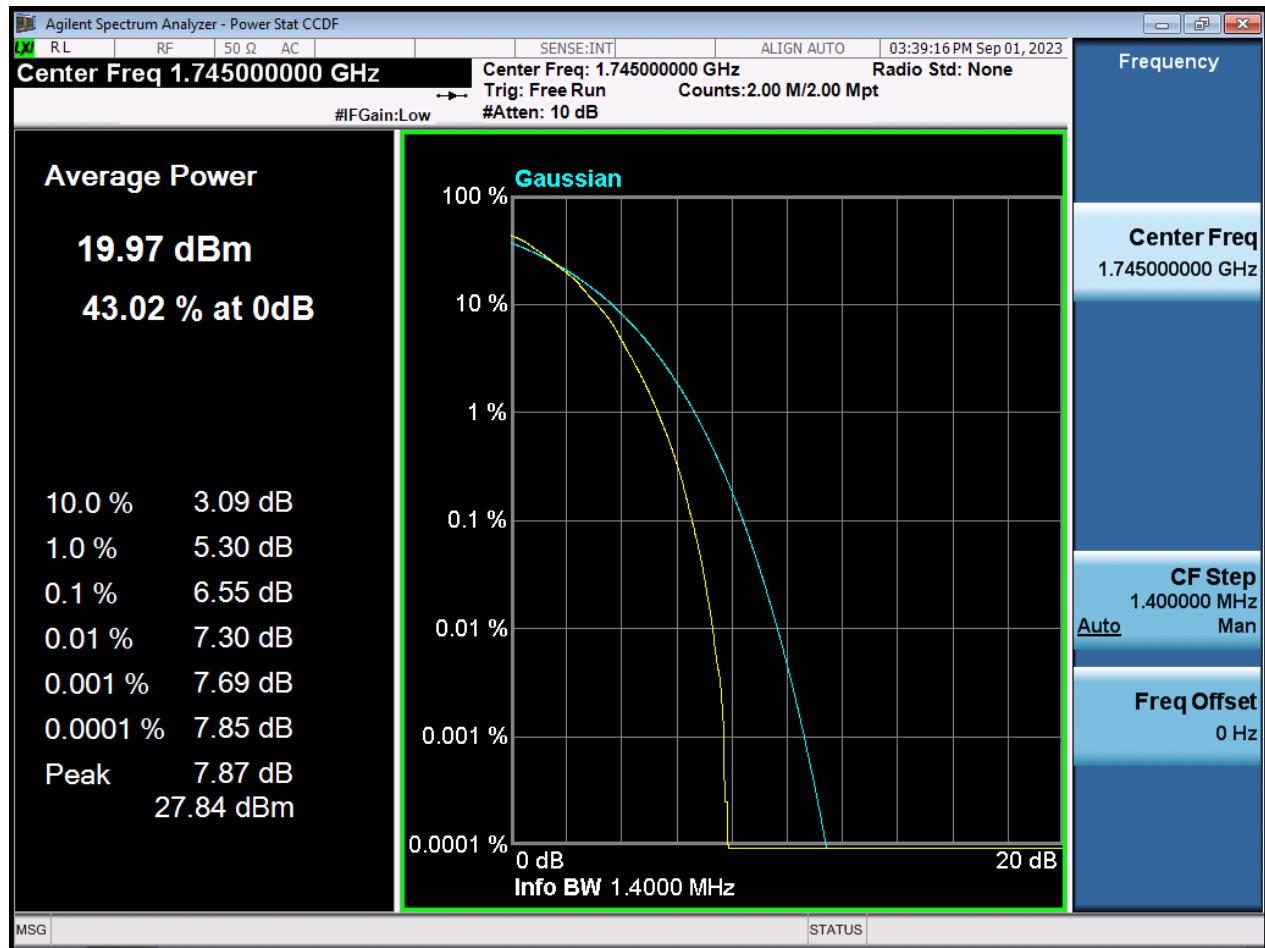


BW1.4 M\_PAR\_Middle Channel\_256QAM\_Full RB

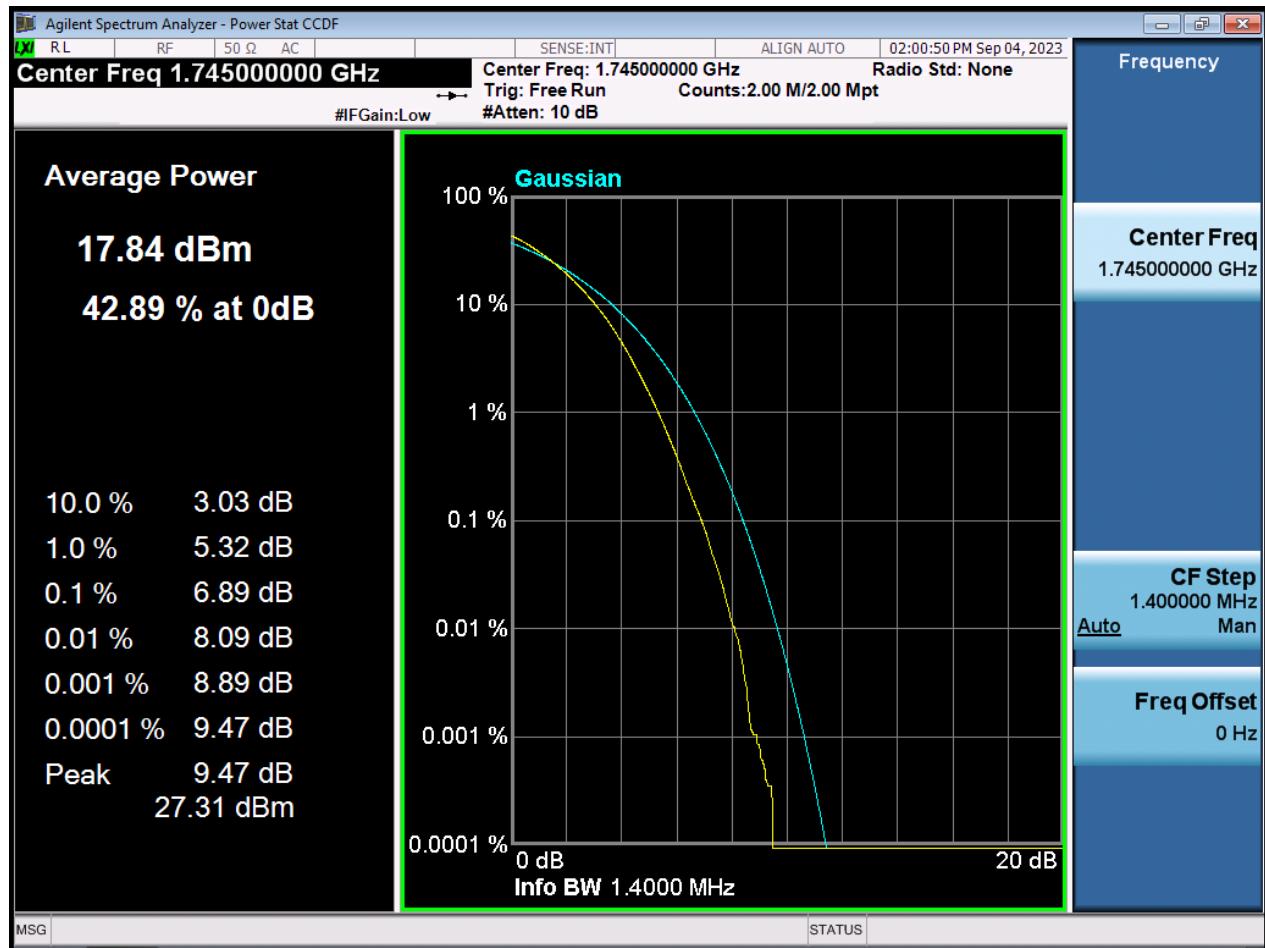


BW3 M\_PAR\_Middle Channel\_QPSK\_Full RB

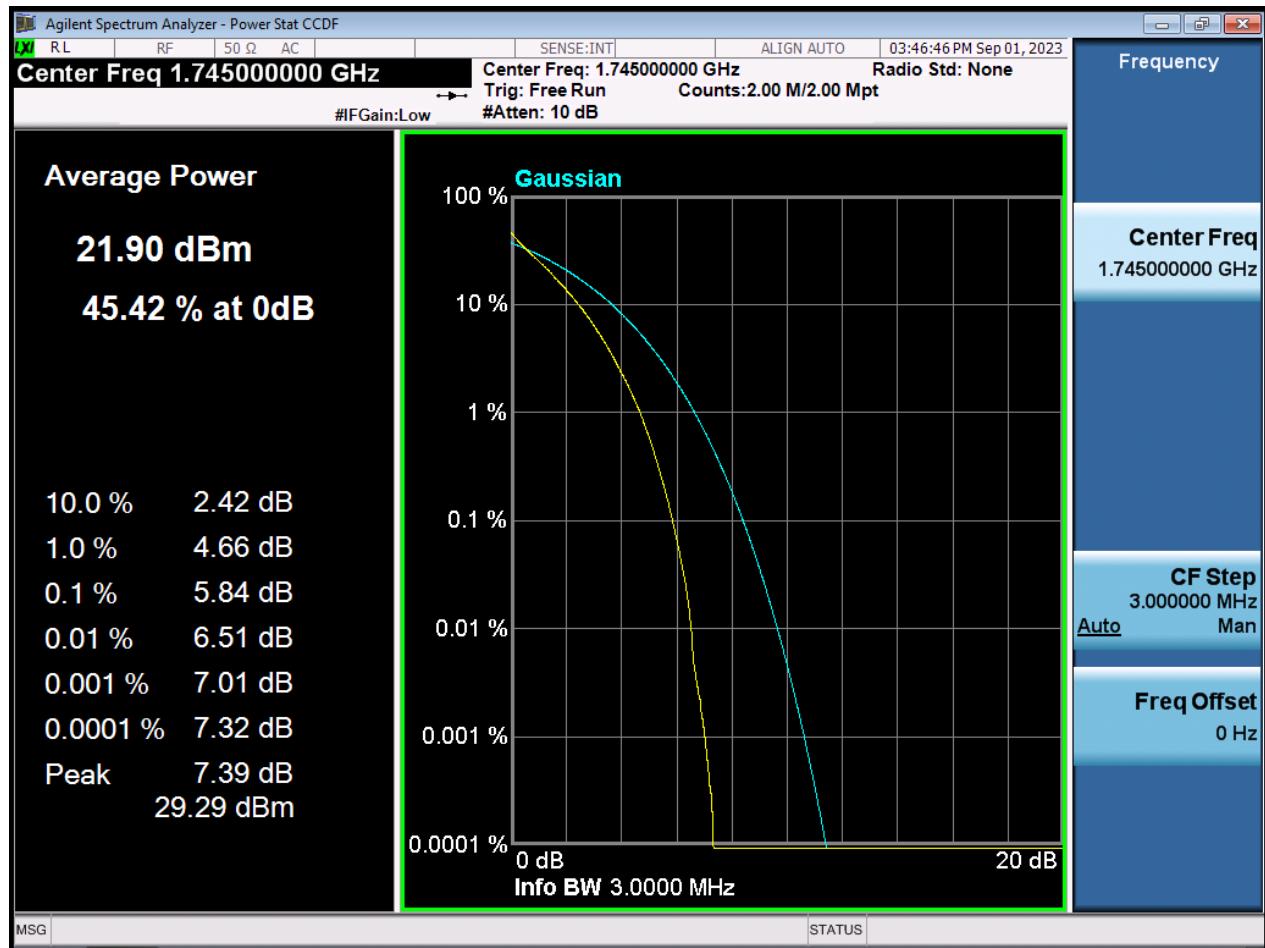


BW3 M\_PAR\_Middle Channel\_16QAM\_Full RB

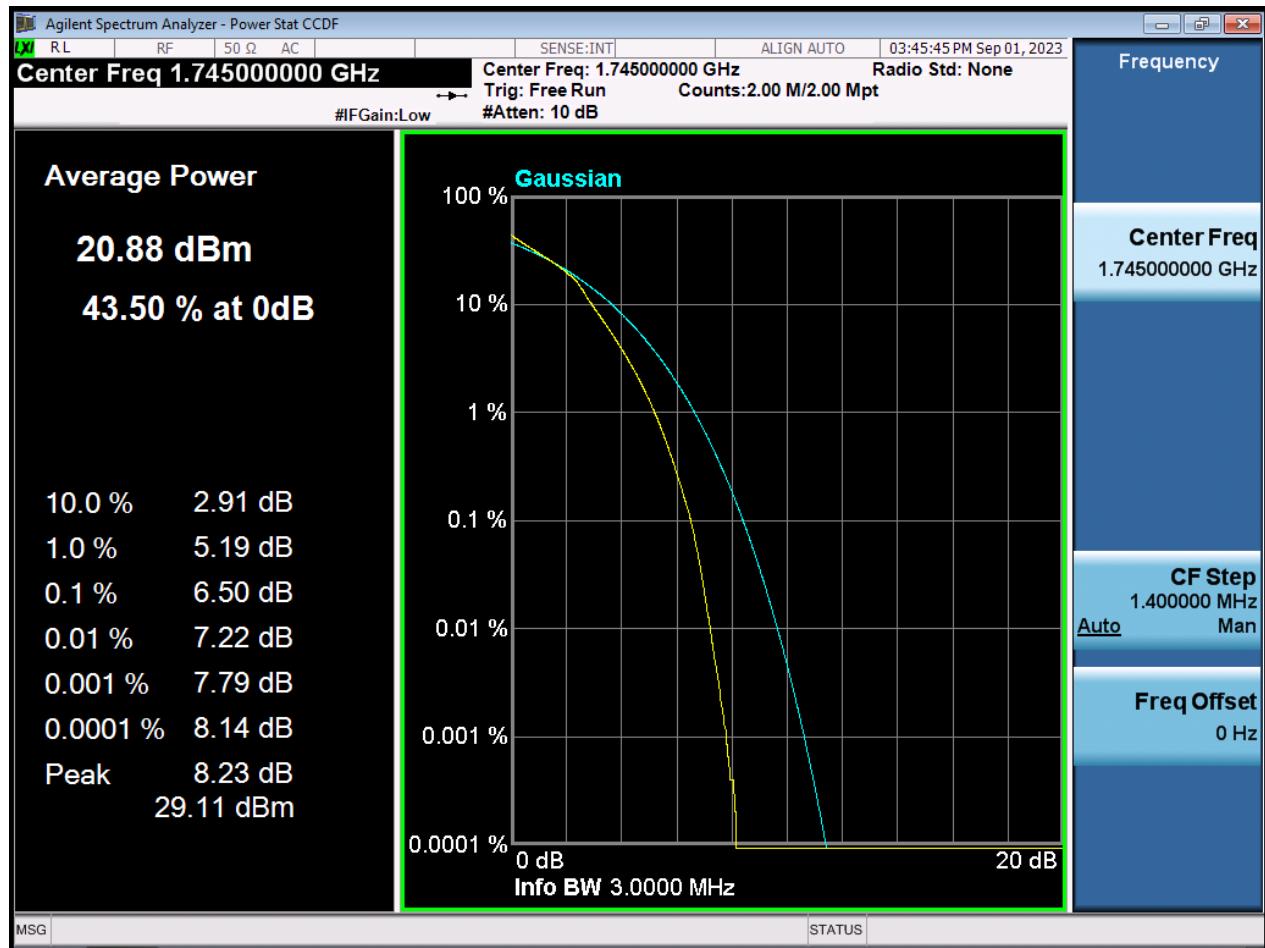


BW3 M\_PAR\_Middle Channel\_64QAM\_Full RB

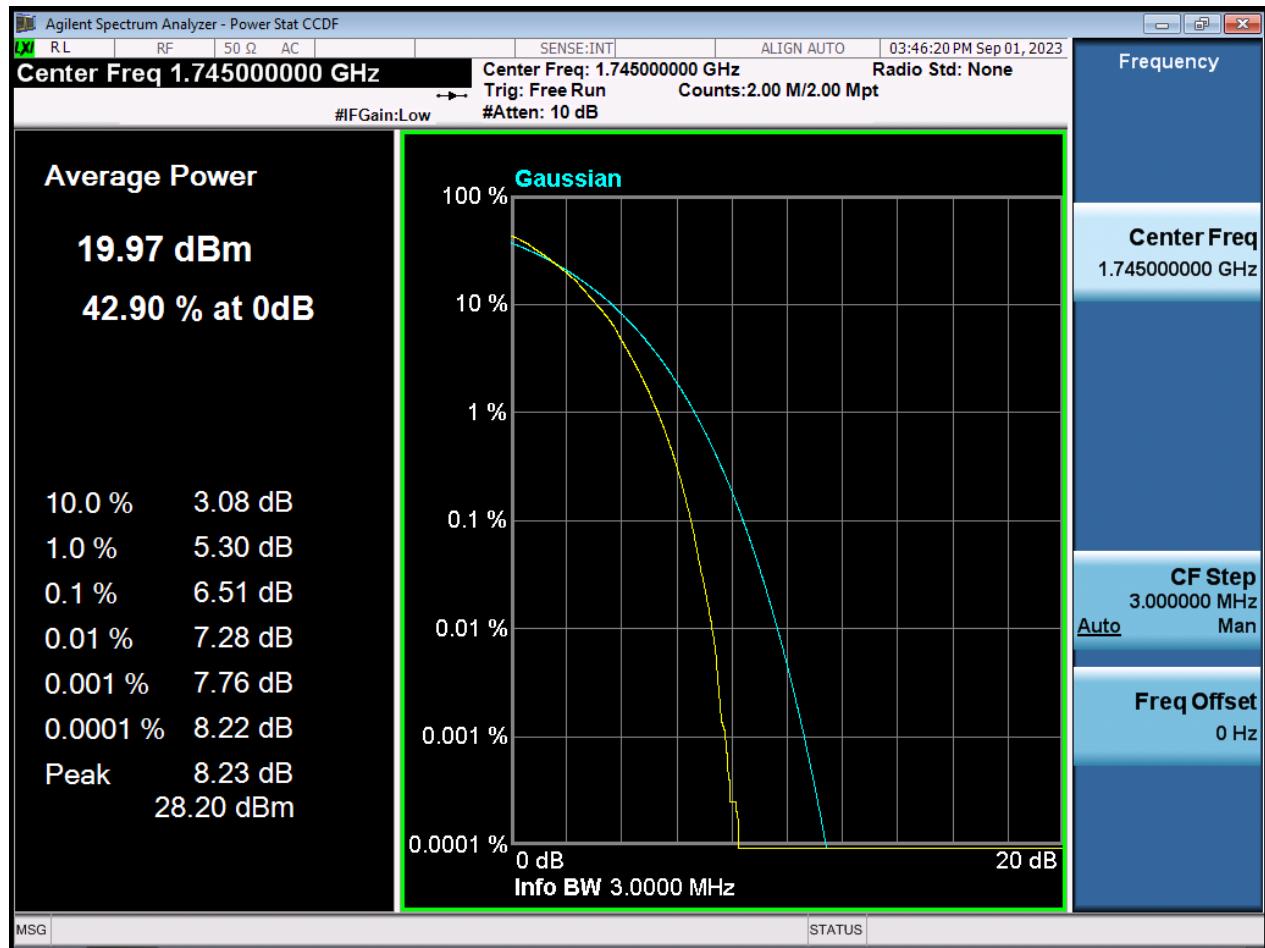


BW3 M\_PAR\_Middle Channel\_256QAM\_Full RB

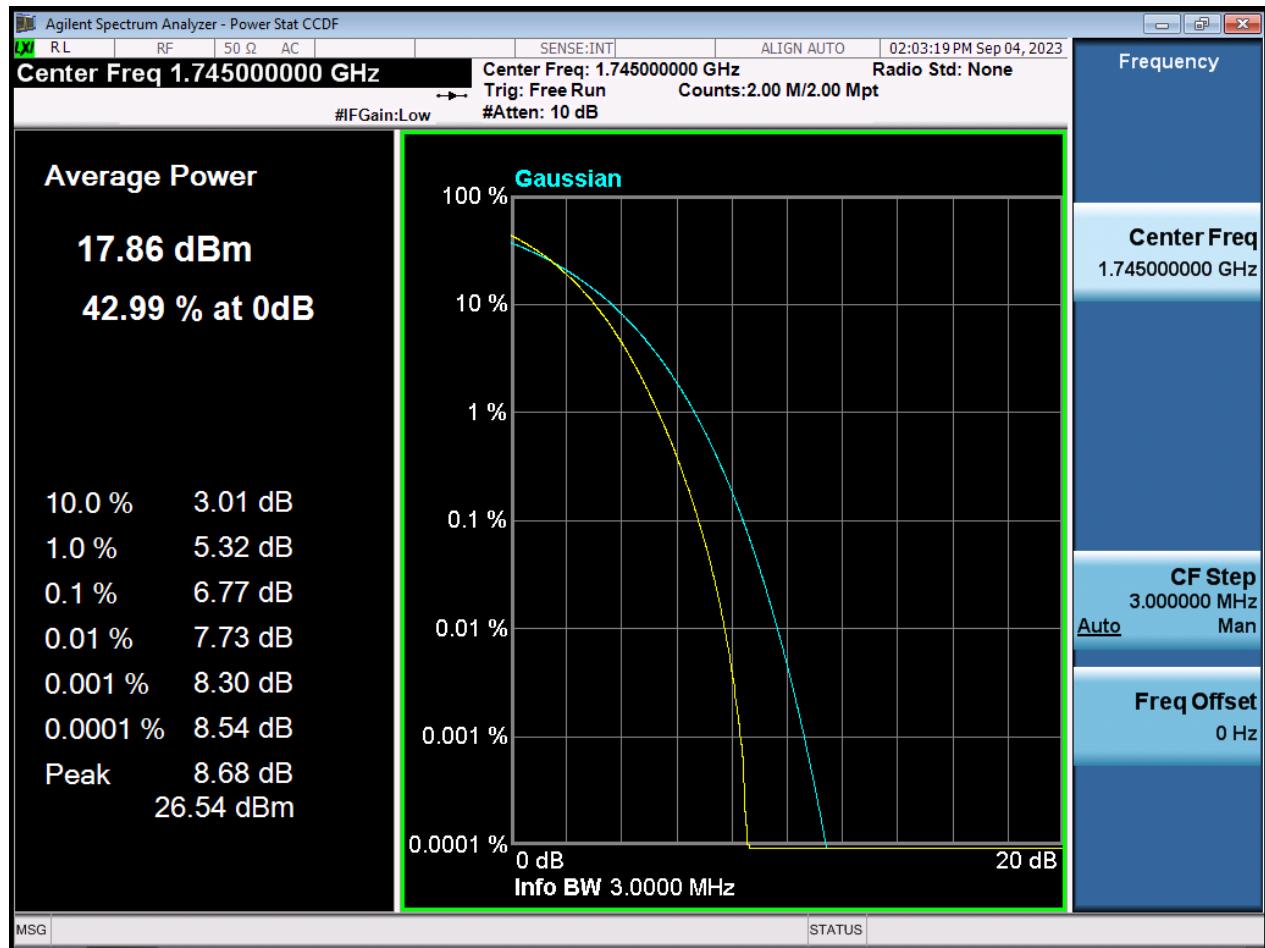


BW5 M\_PAR\_Middle Channel\_QPSK\_Full RB

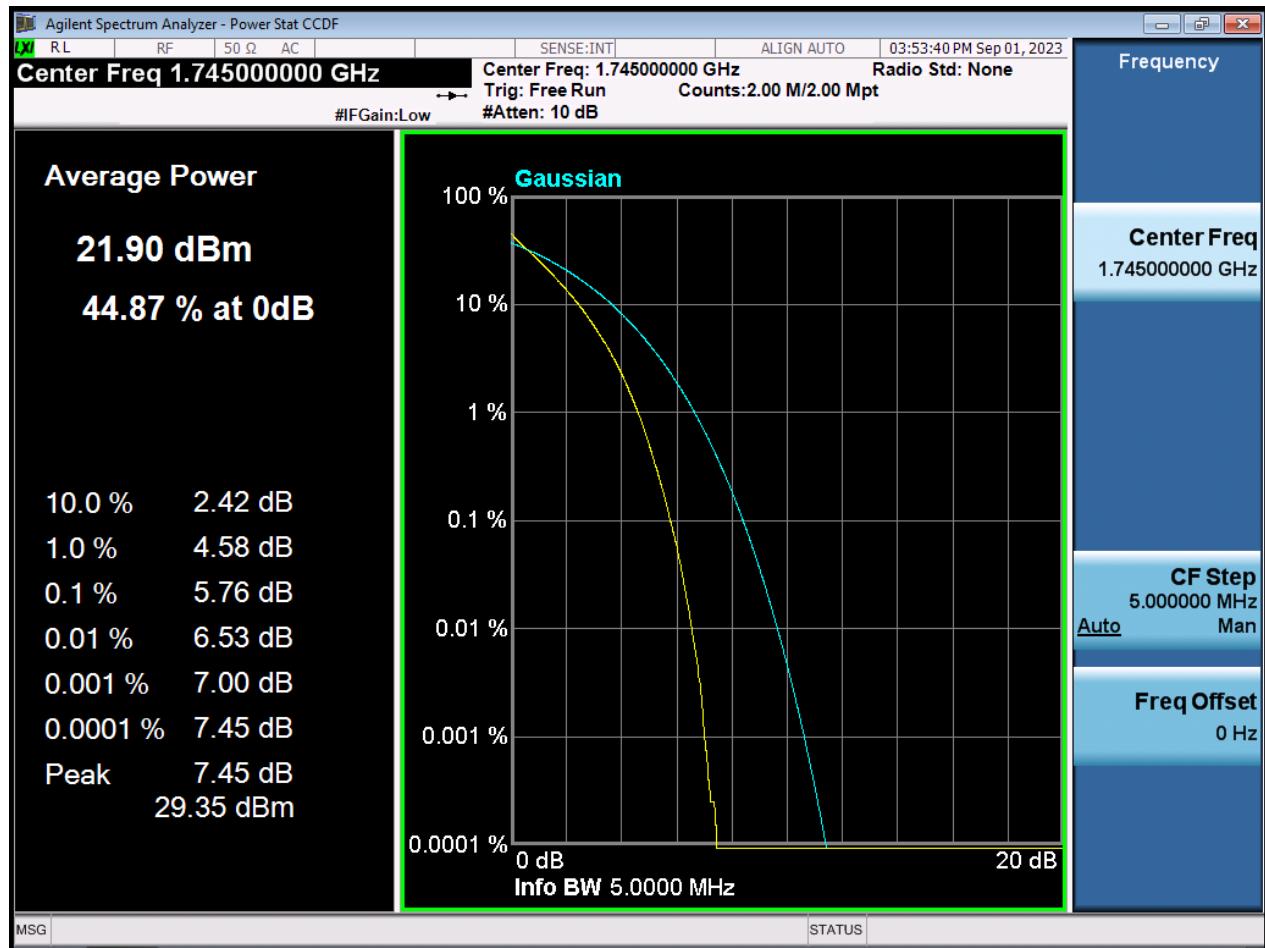


BW5 M\_PAR\_Middle Channel\_16QAM\_Full RB

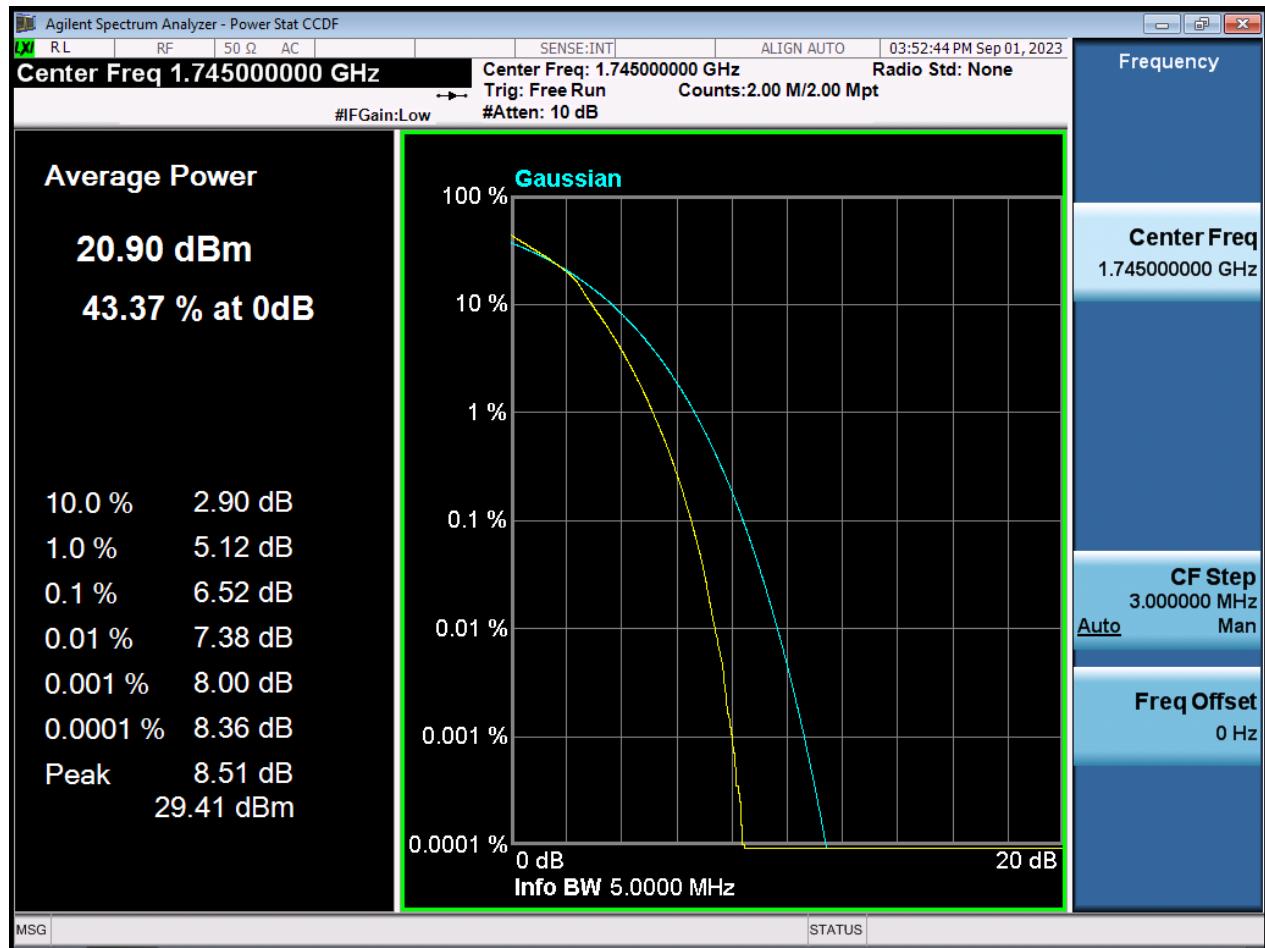


BW5 M\_PAR\_Middle Channel\_64QAM\_Full RB

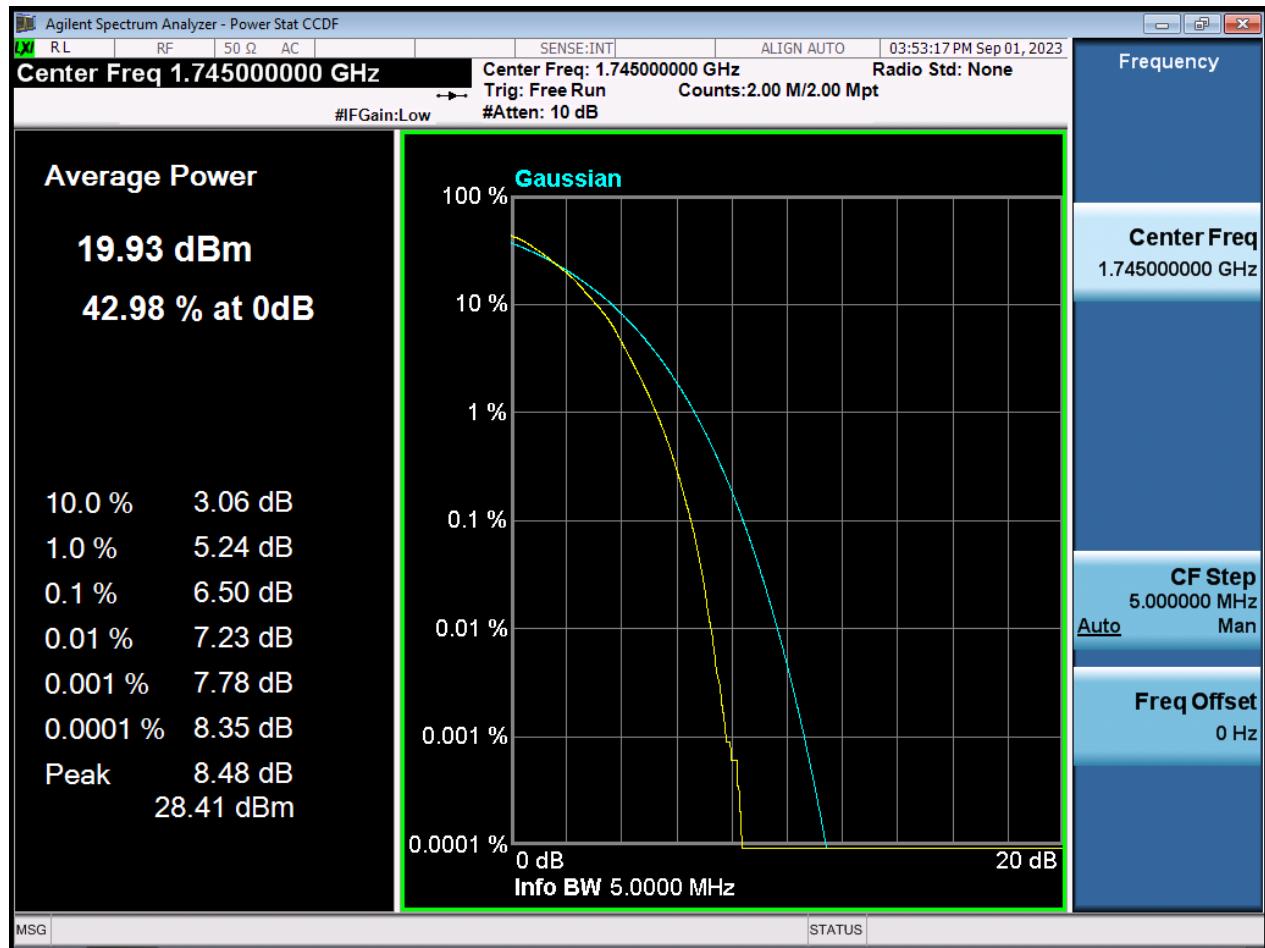


BW5 M\_PAR\_Middle Channel\_256QAM\_Full RB

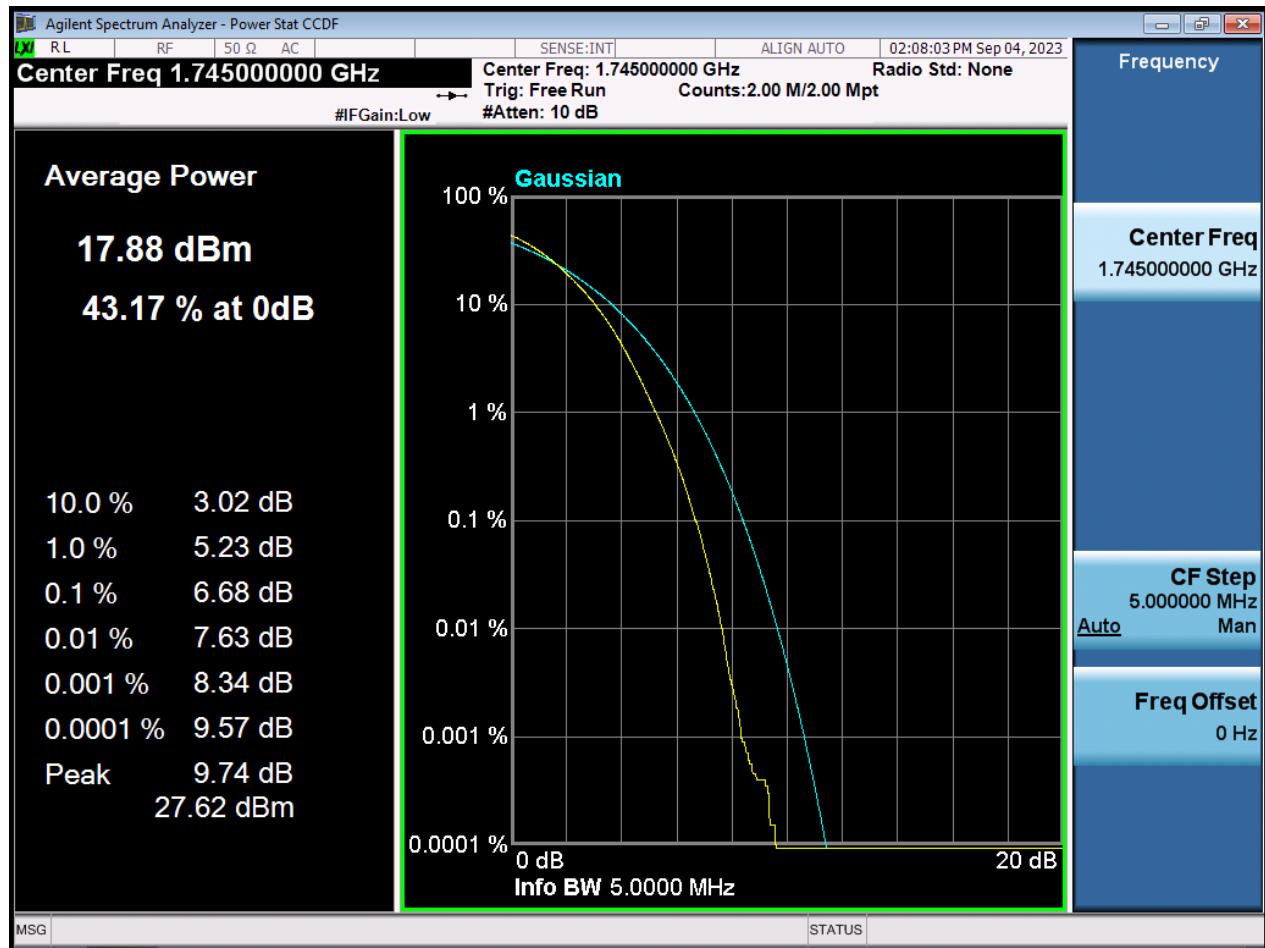


BW10 M\_PAR\_Middle Channelz\_QPSK\_Full RB

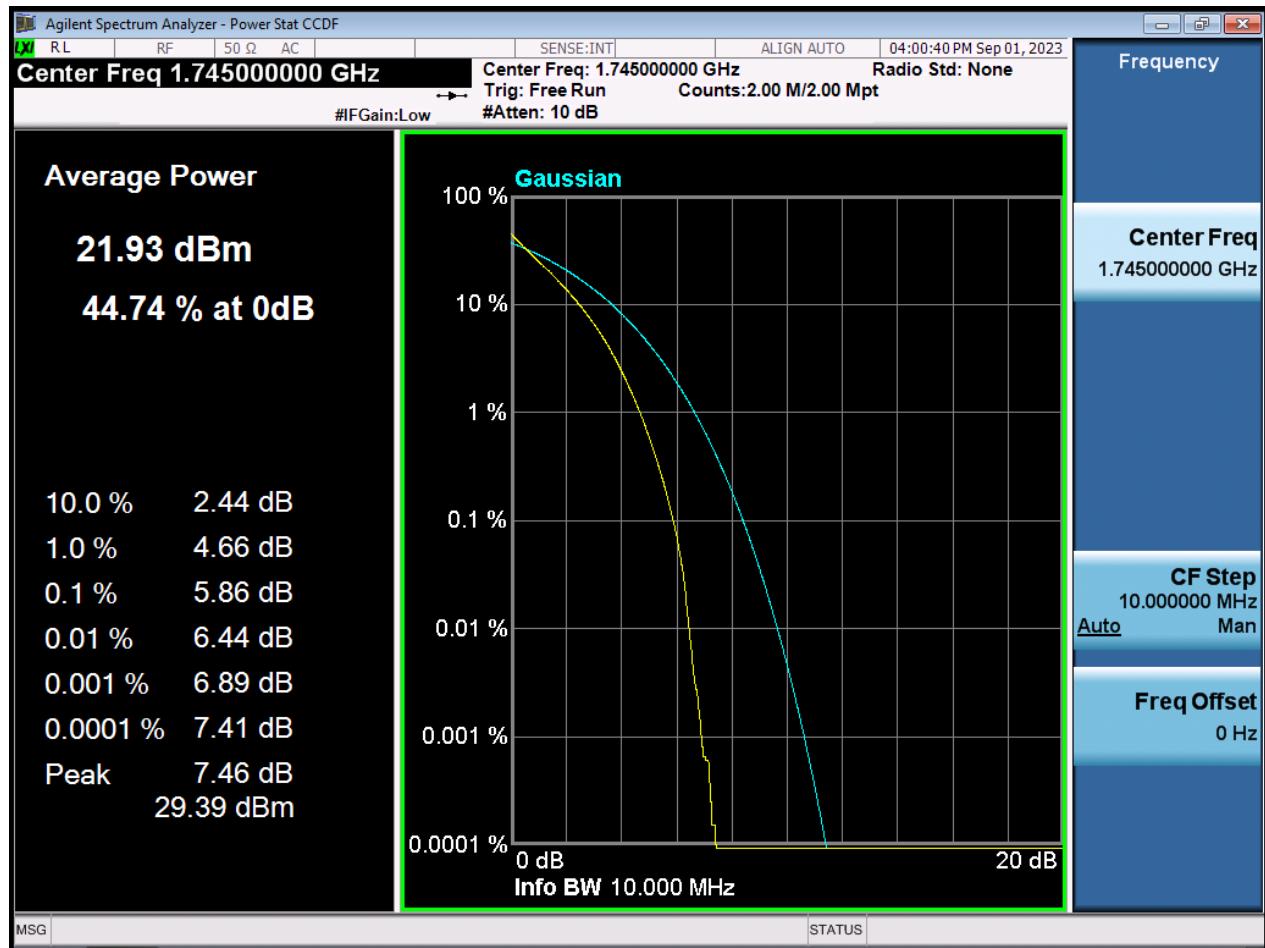


BW10 M\_PAR\_Middle Channel\_16QAM\_Full RB

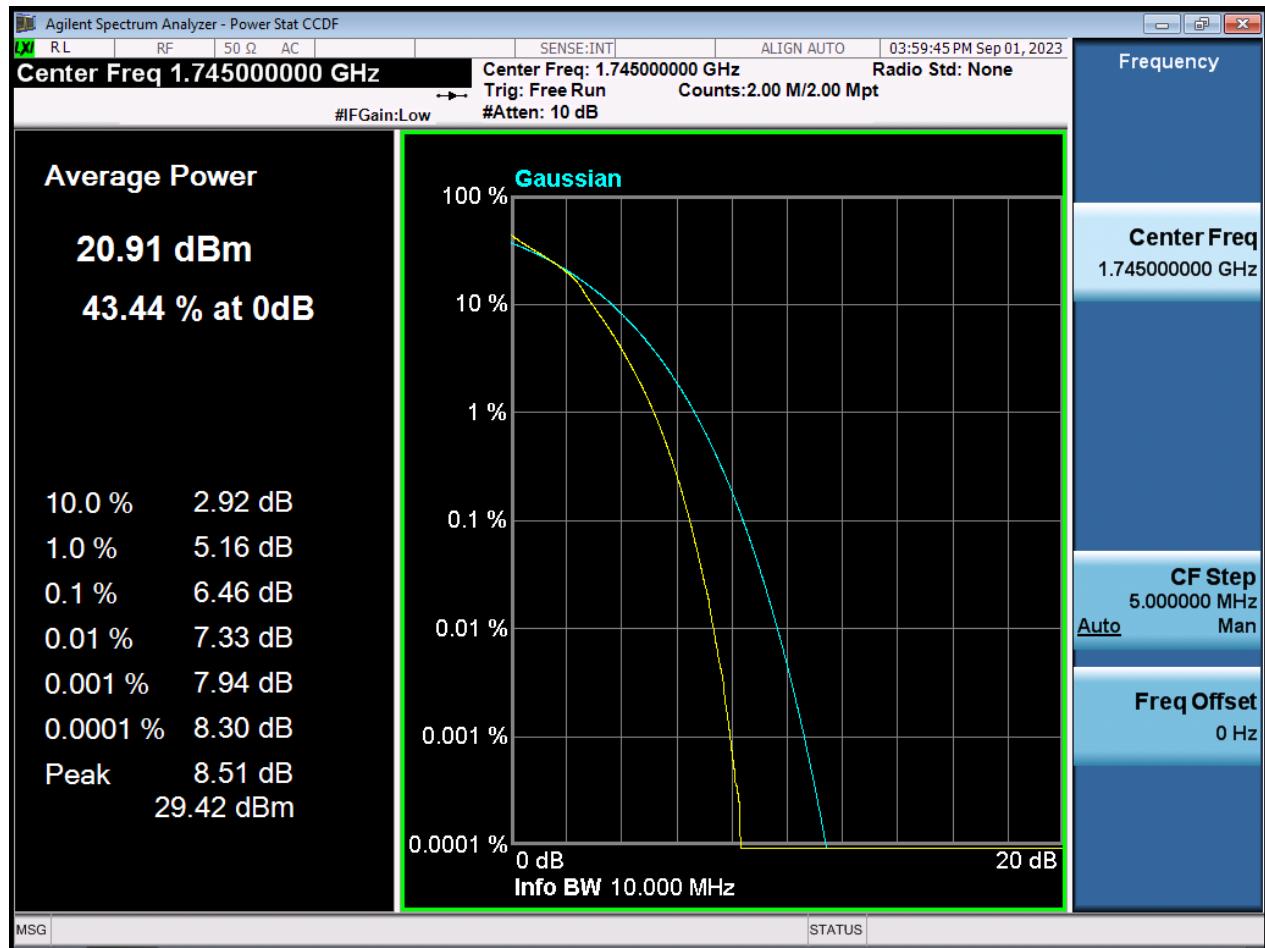


BW10 M\_PAR\_Middle Channel\_64QAM\_Full RB

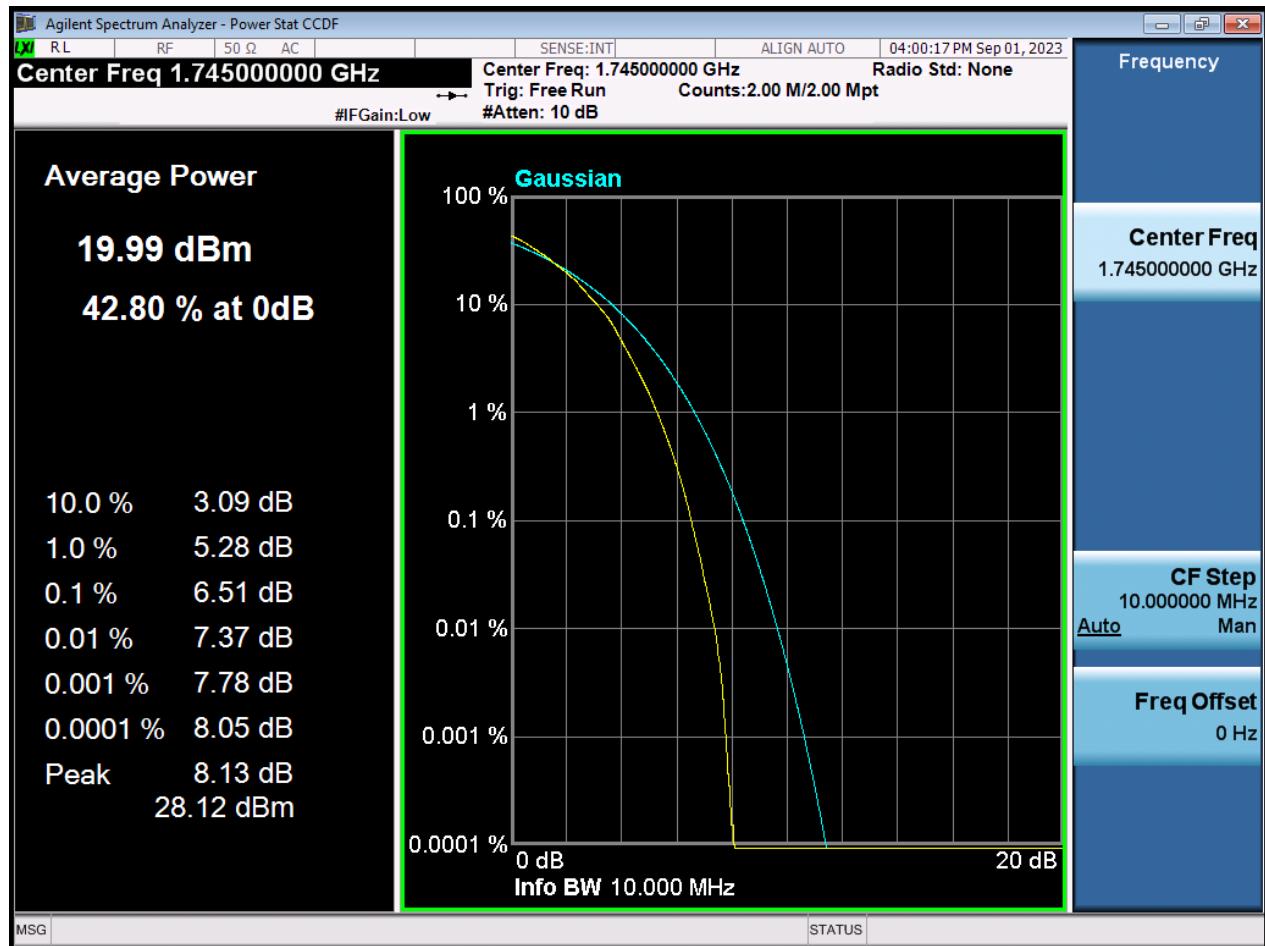


BW10 M\_PAR\_Middle Channel\_256QAM\_Full RB

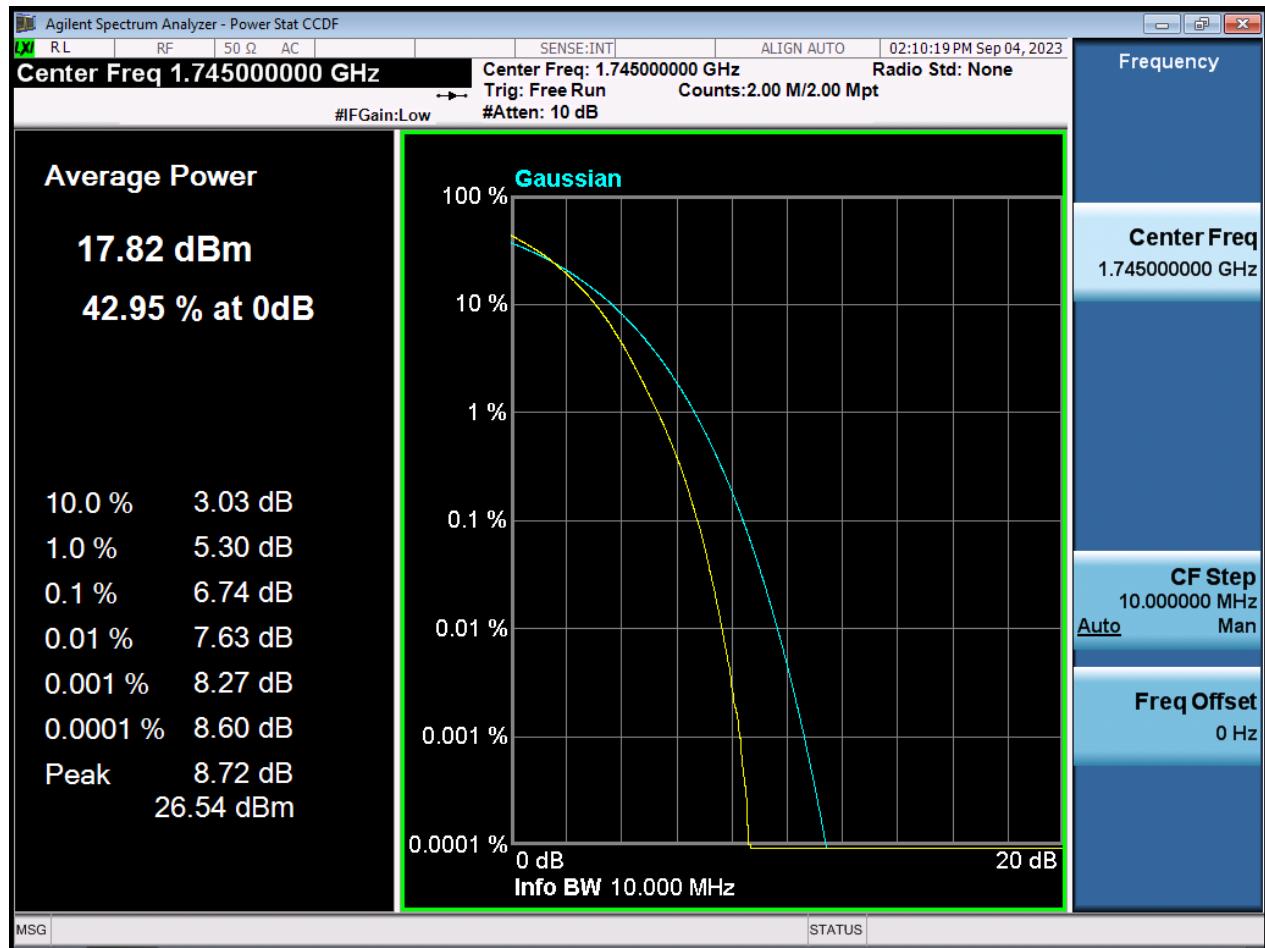


BW15 M\_PAR\_Middle Channel\_QPSK\_Full RB

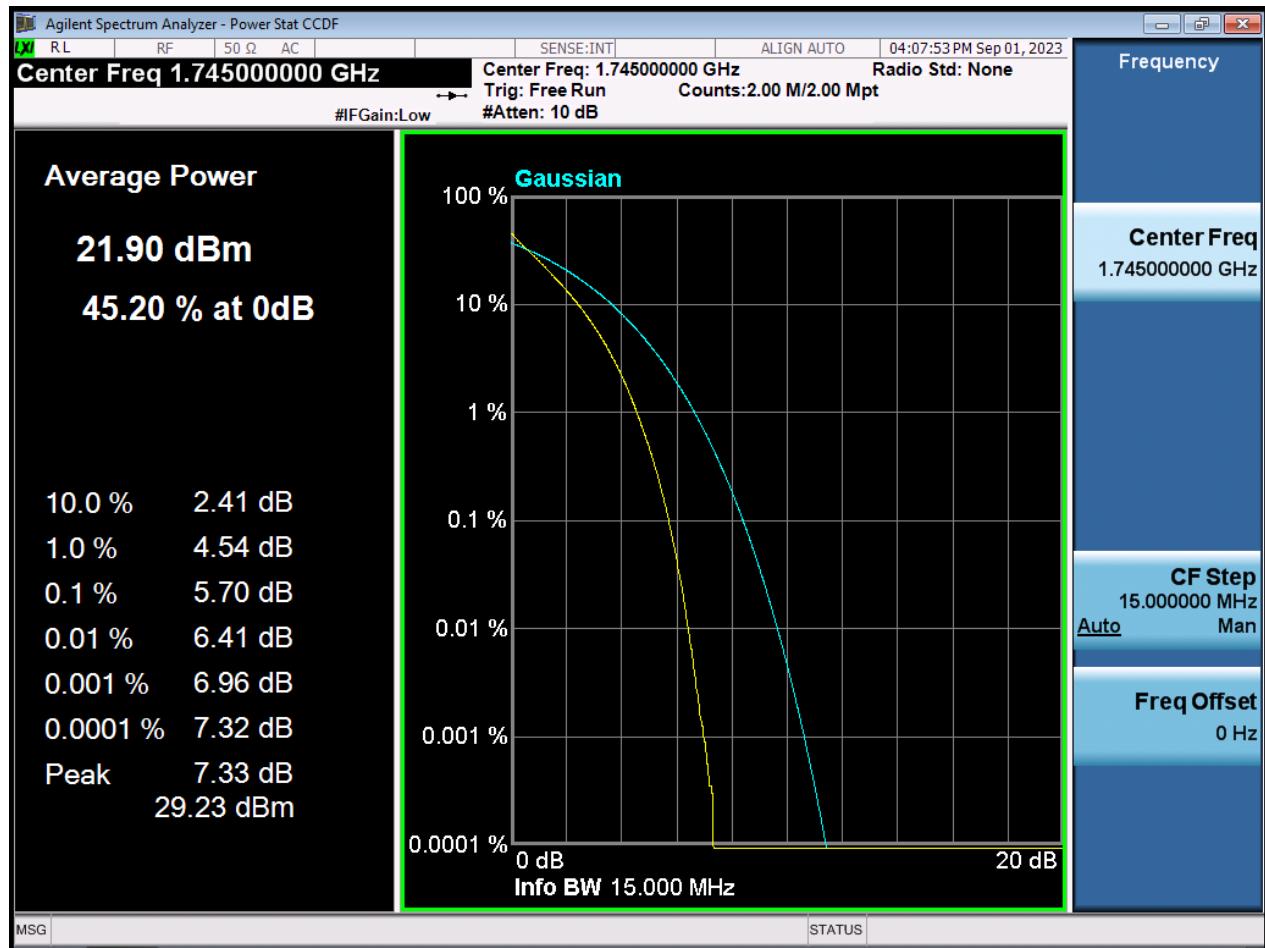


BW15 M\_PAR\_Middle Channel\_16QAM\_Full RB

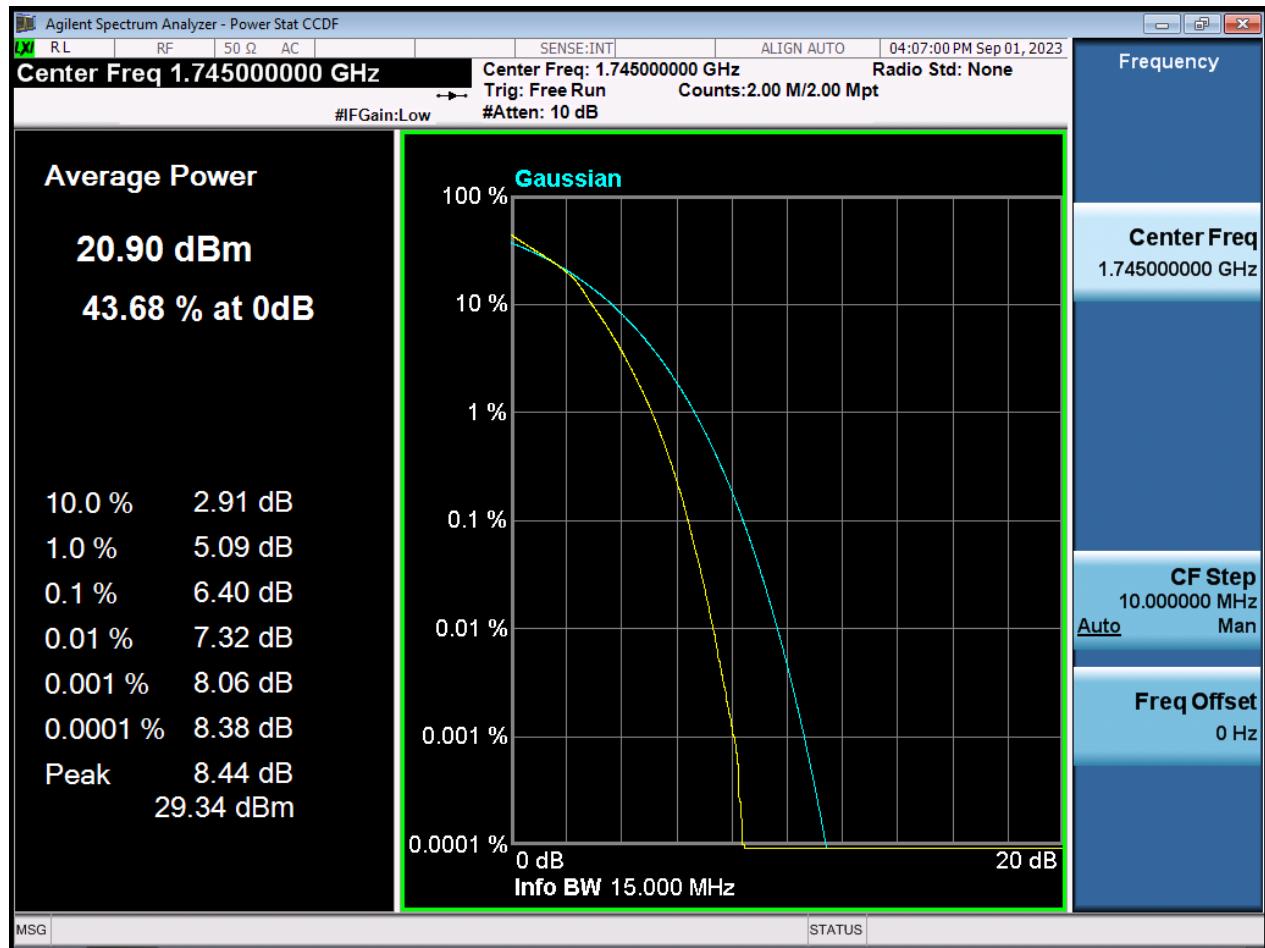


BW15 M\_PAR\_Middle Channel\_64QAM\_Full RB

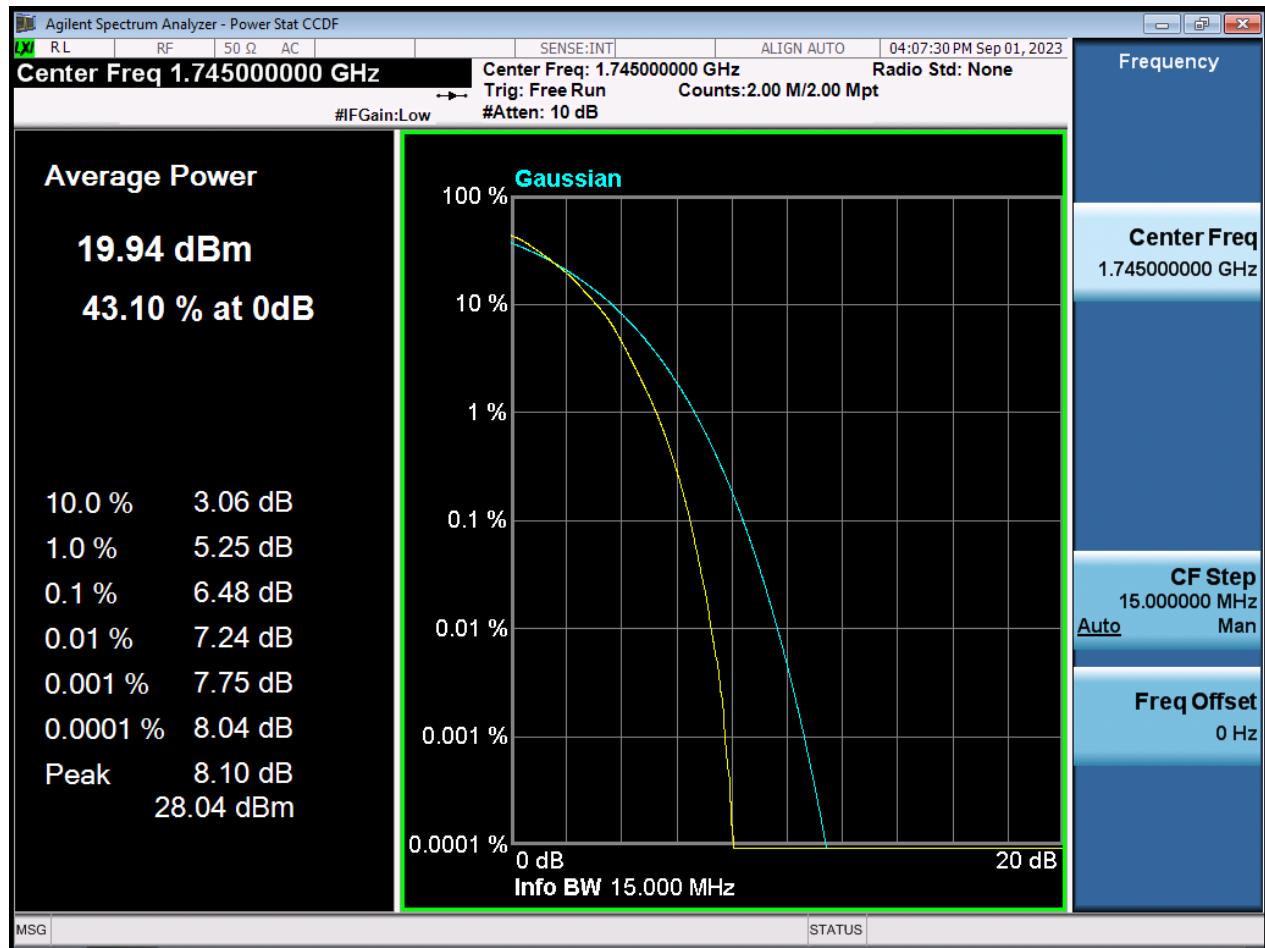


BW15 M\_PAR\_Middle Channel\_256QAM\_Full RB

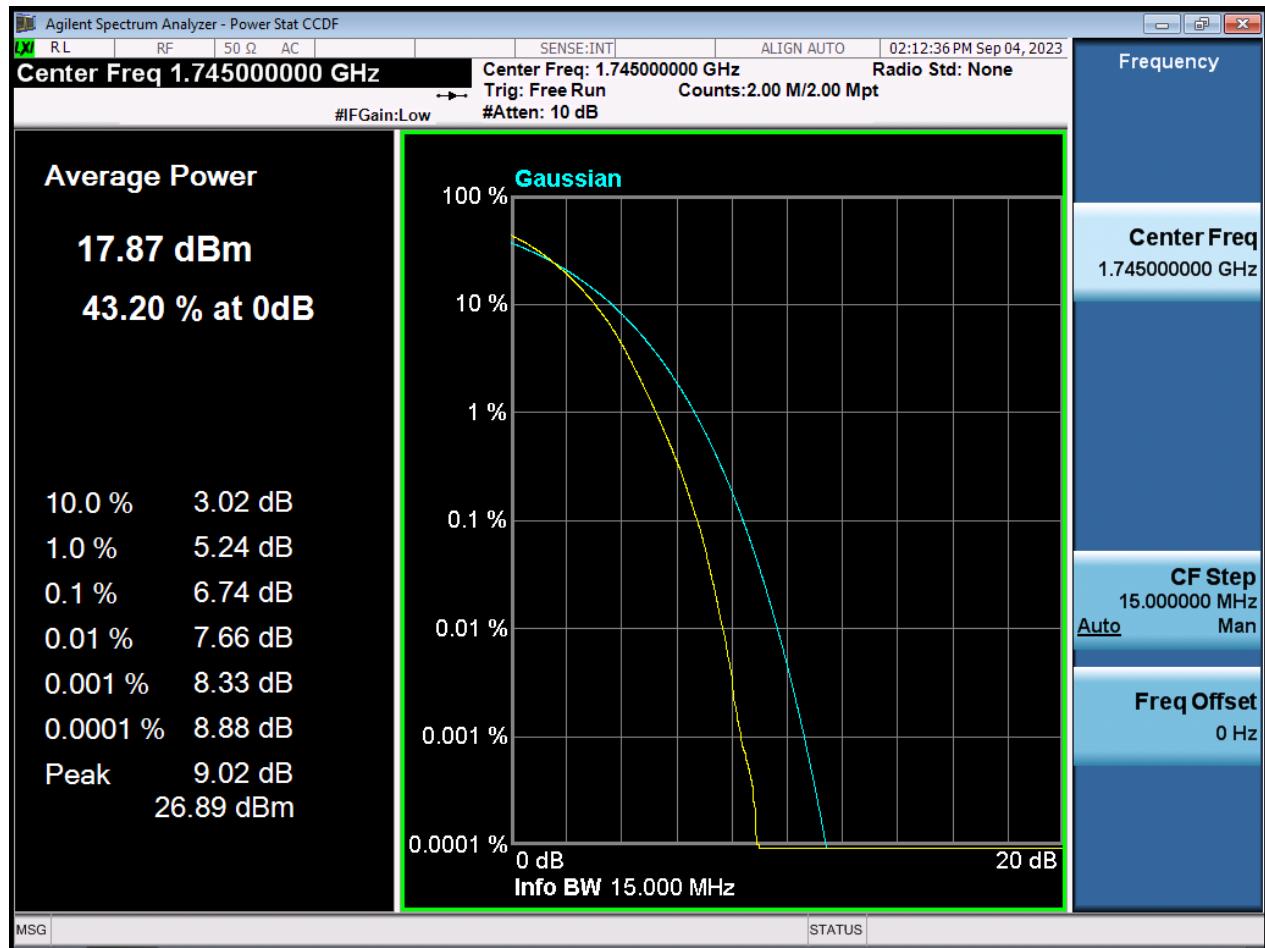


BW20 M\_PAR\_Middle Channel\_QPSK\_Full RB

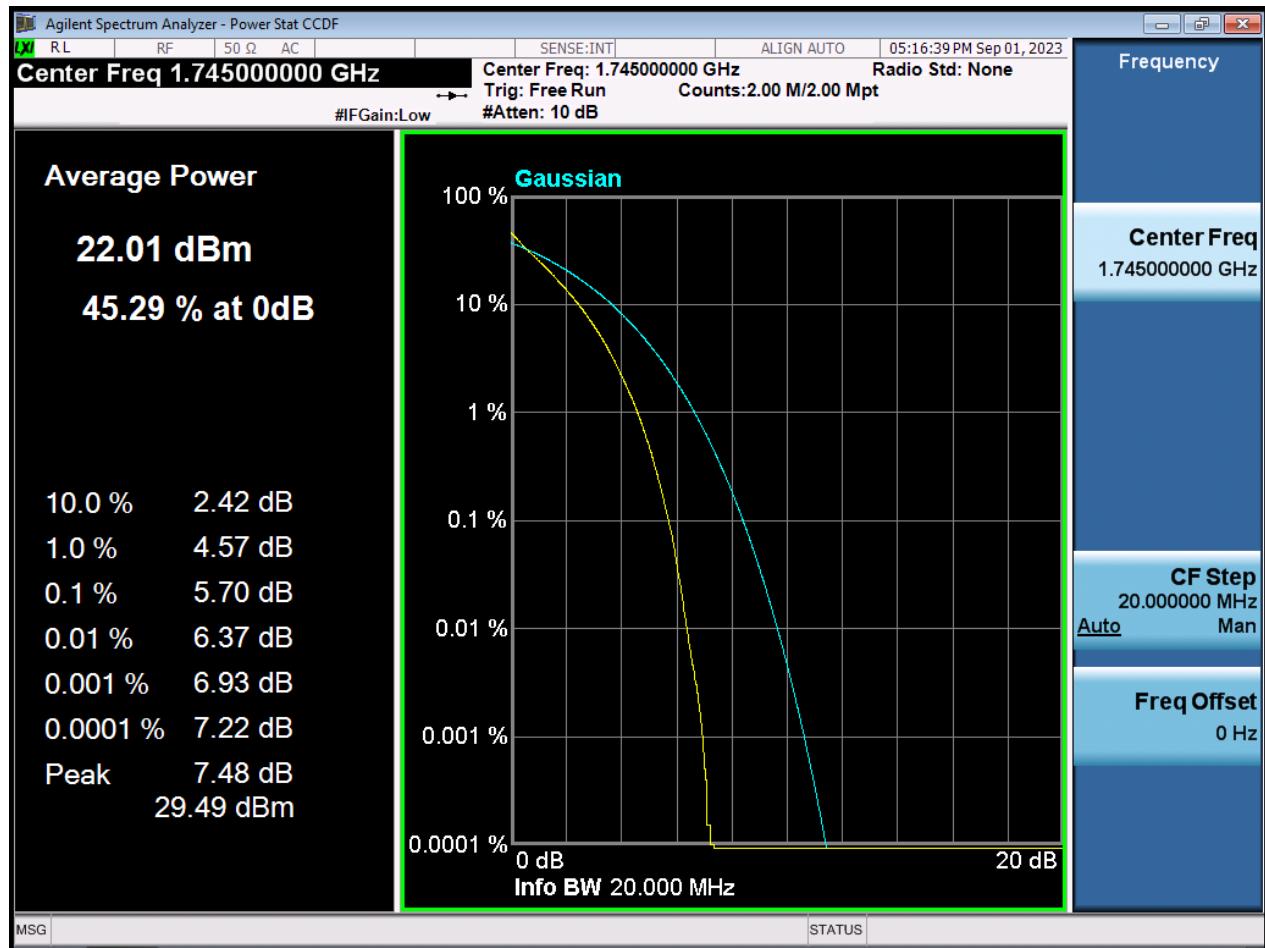


BW20 M\_PAR\_Middle Channel\_16QAM\_Full RB

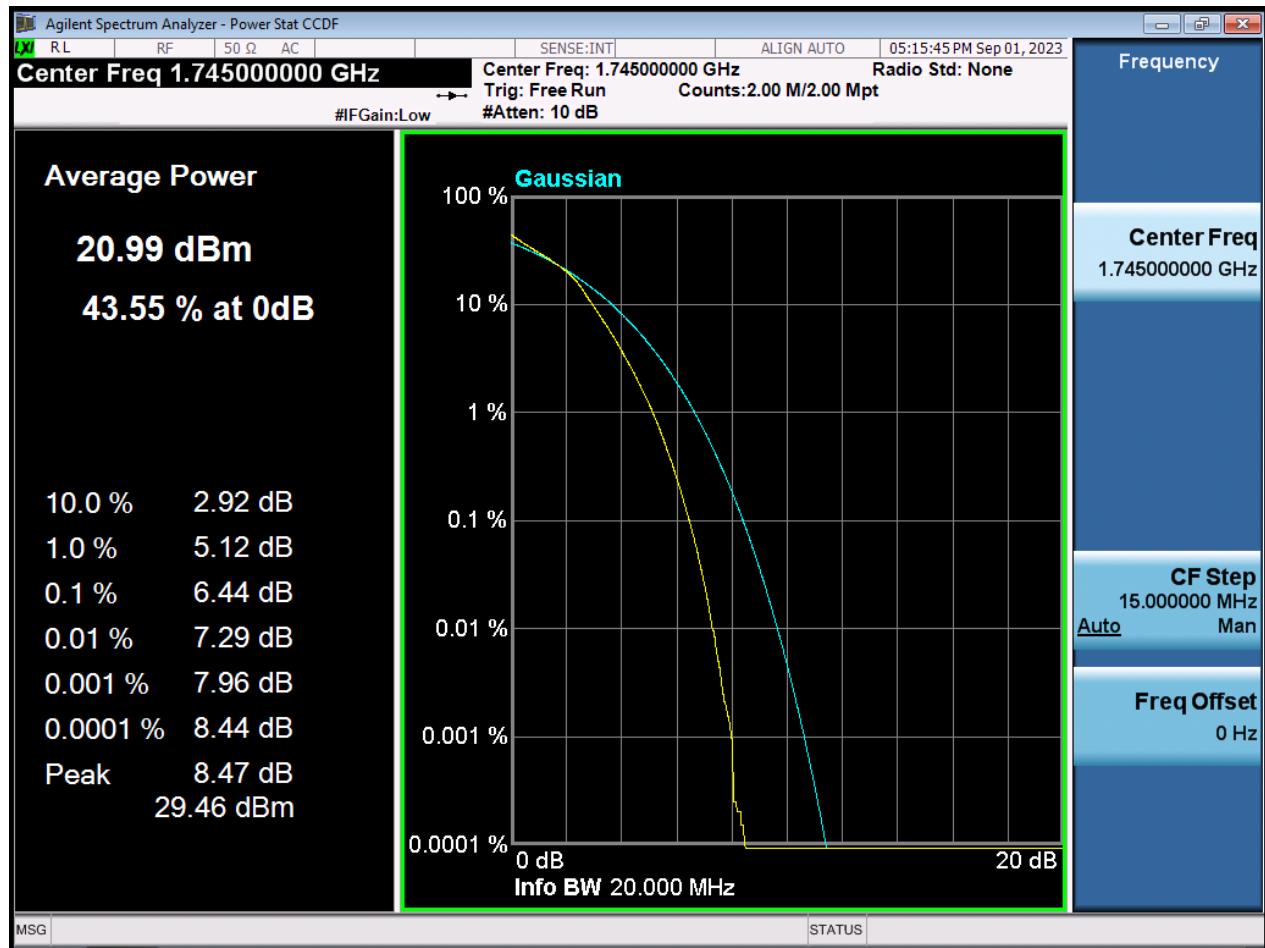


BW20 M\_PAR\_Middle Channel\_64QAM\_Full RB

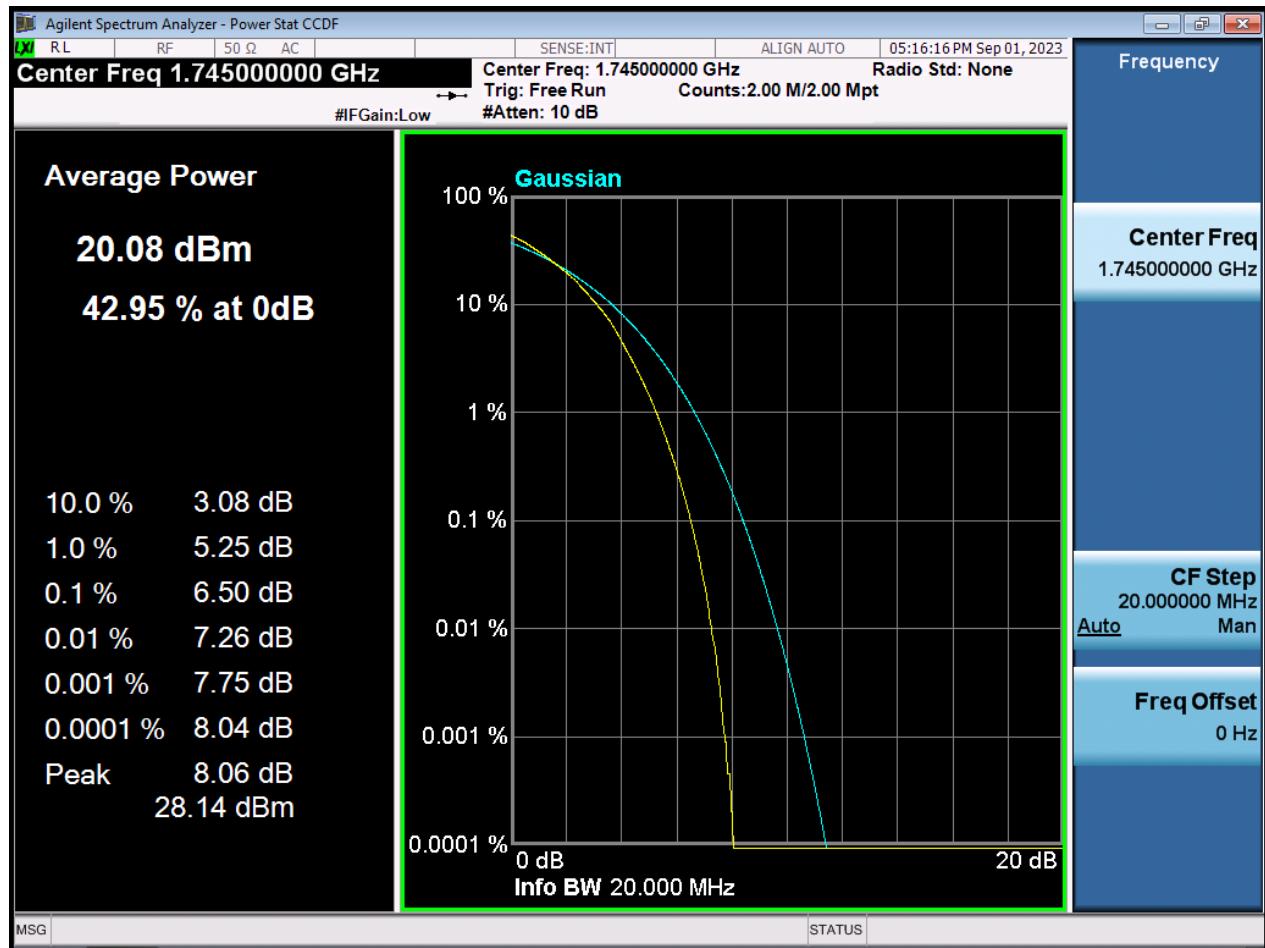


BW20 M\_PAR\_Middle Channel\_256QAM\_Full RB

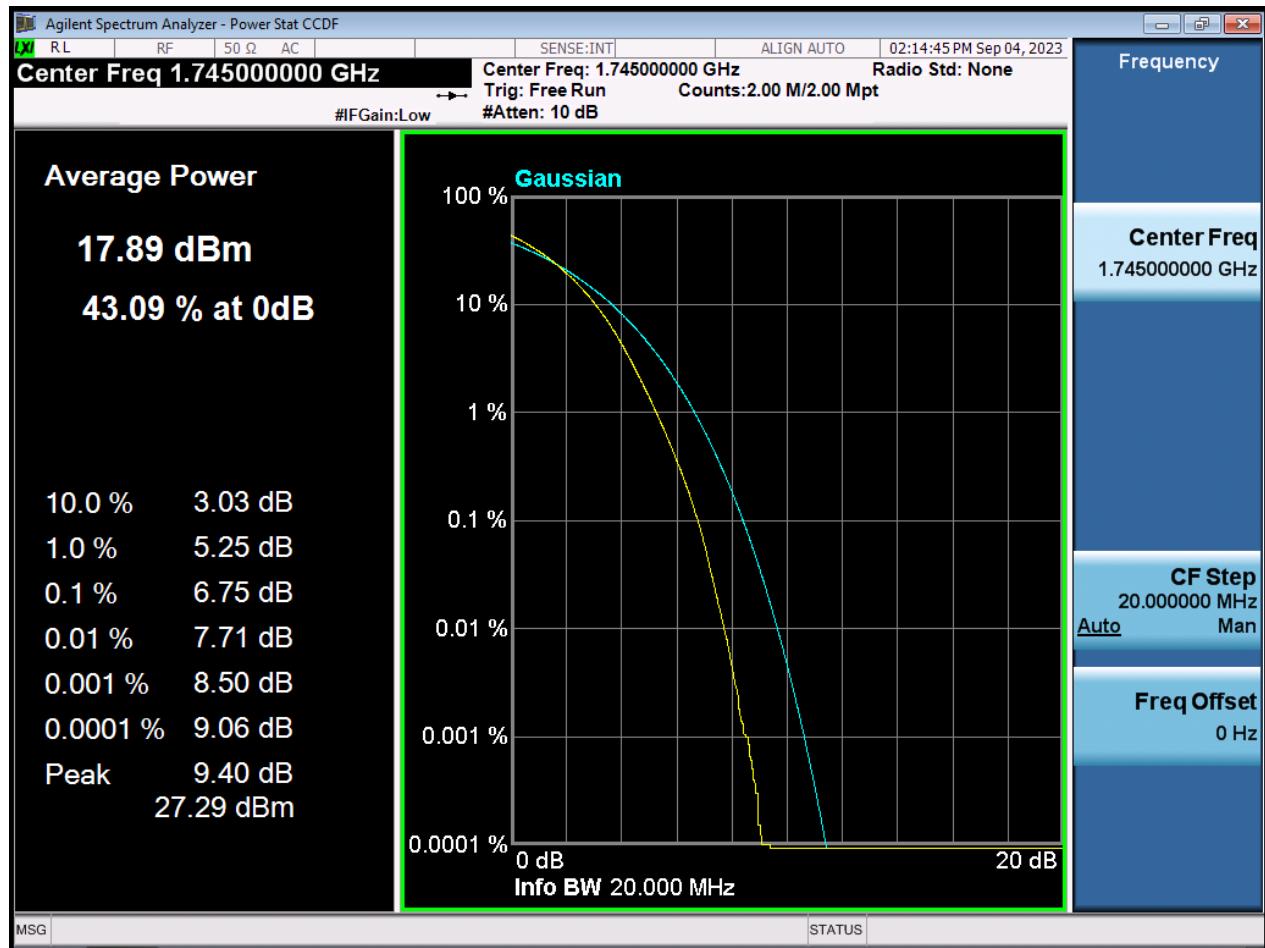


BW1.4 M\_CSE(30 M-10 G)\_Lowest Channel\_QPSK\_1RB

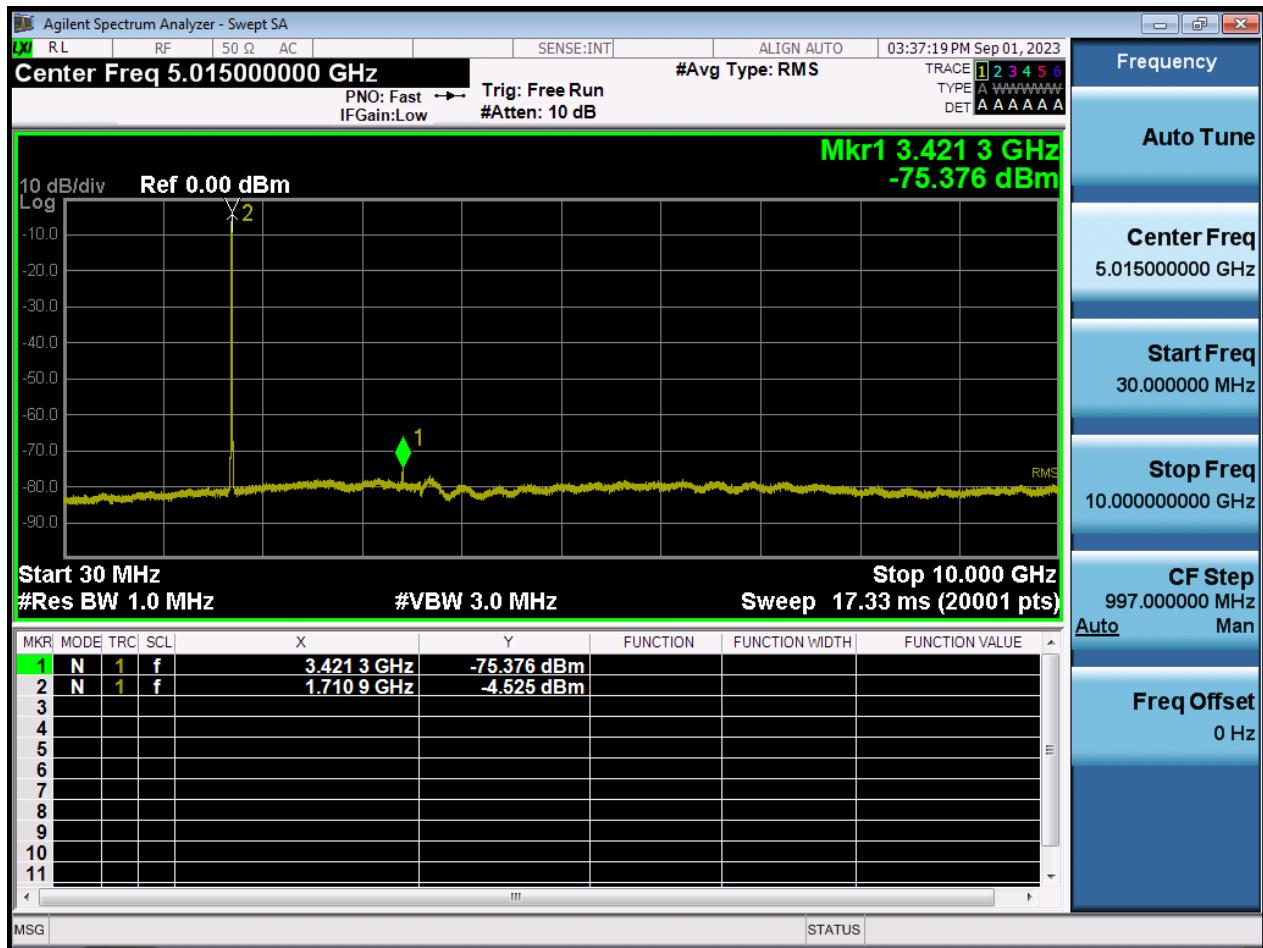


BW1.4 M\_CSE(30 M-10 G)\_Middle Channel\_QPSK\_1RB

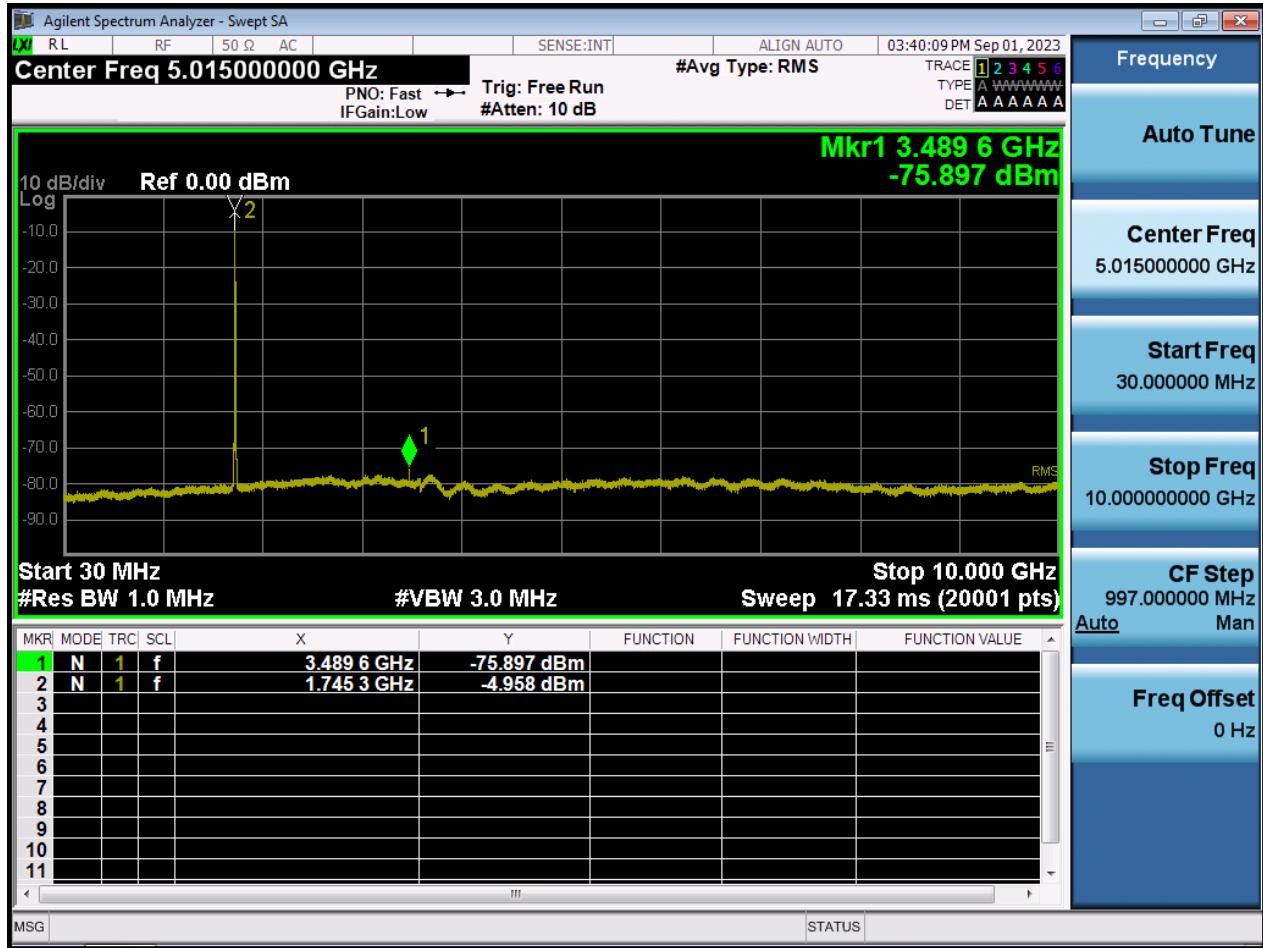


BW1.4 M\_CSE(30 M-10 G)\_Highest Channel\_QPSK\_1RB

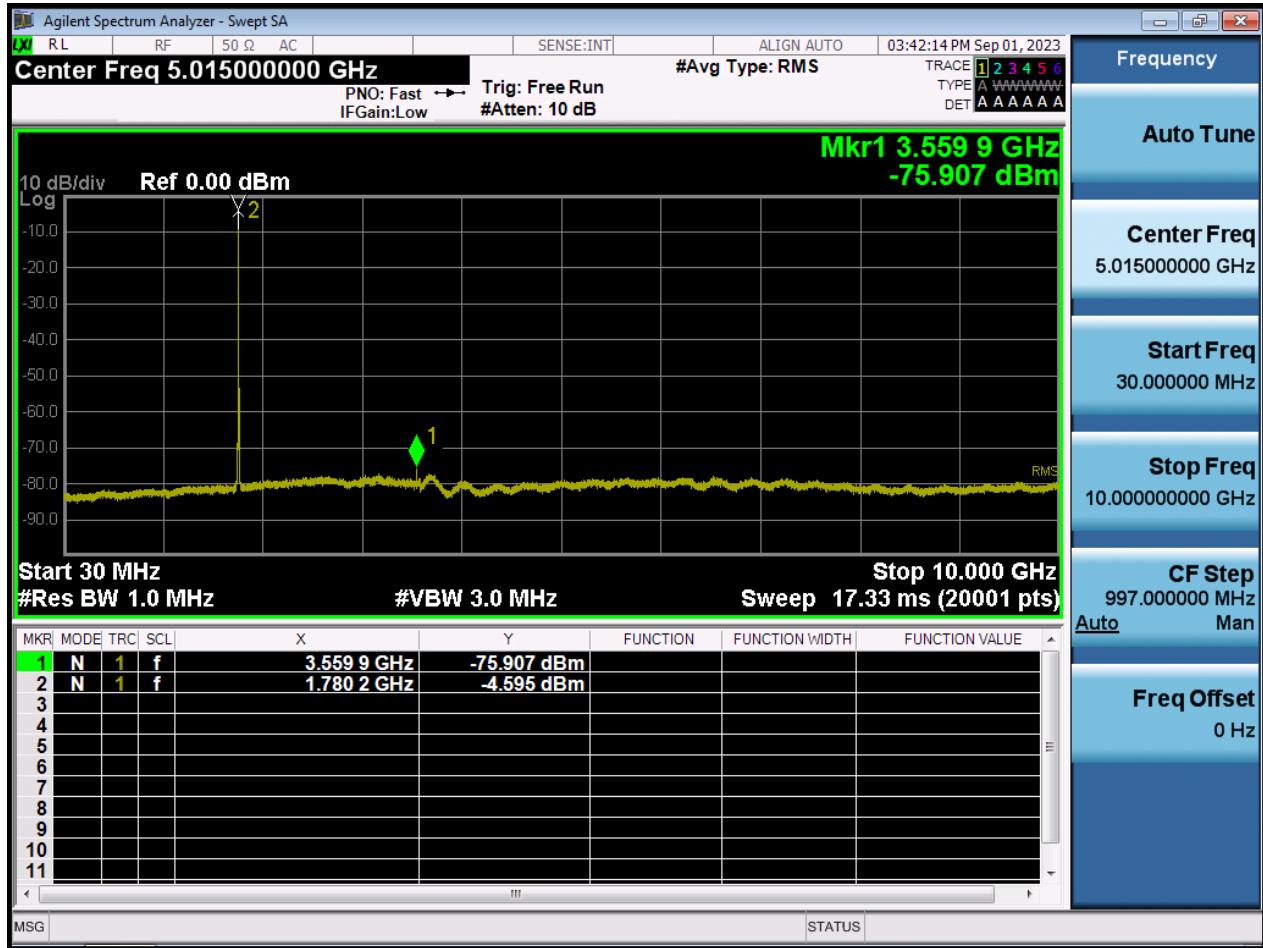


BW3 M\_CSE(30 M-10 G)\_Lowest Channel\_QPSK\_1RB

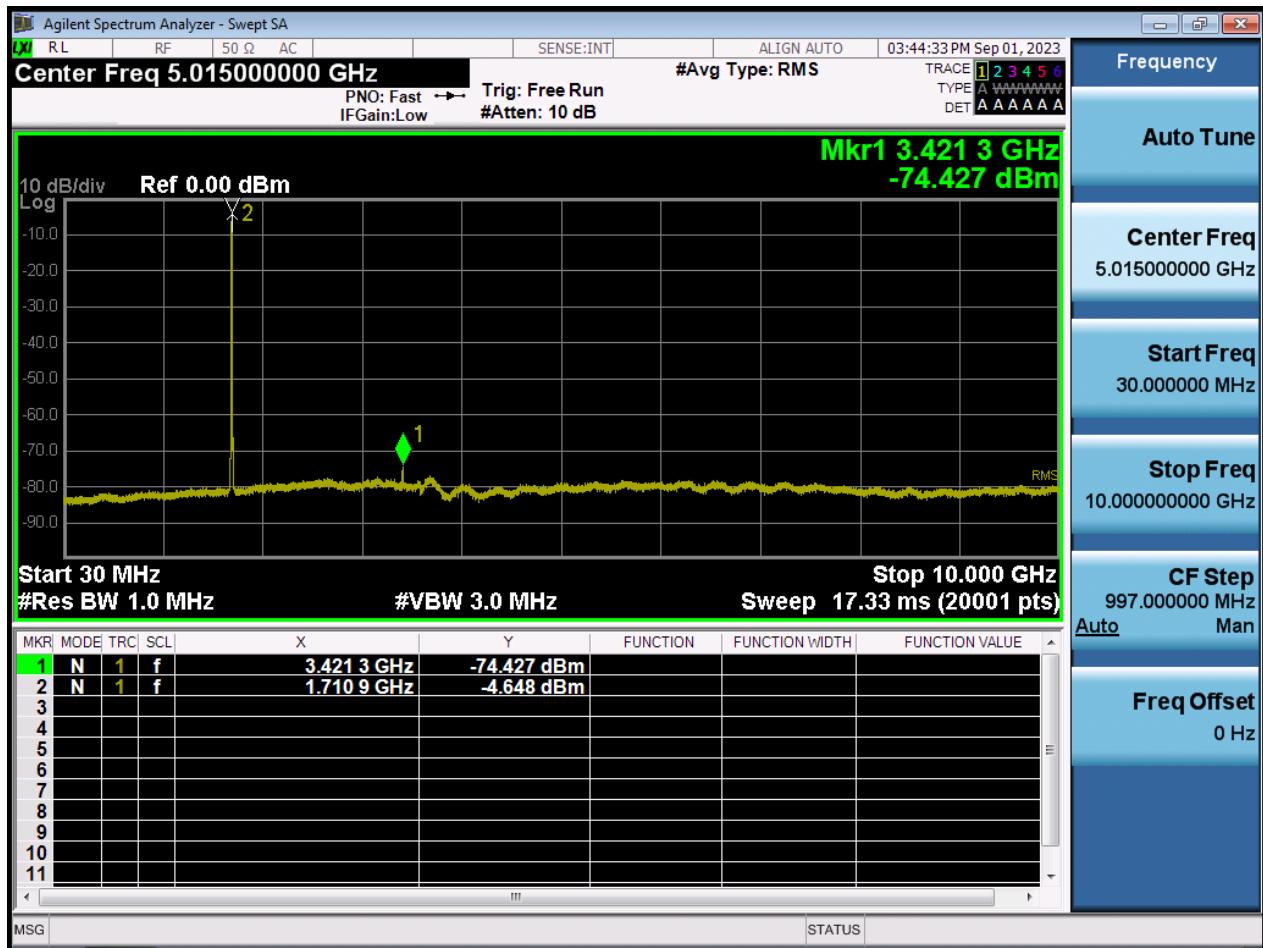

BW3 M\_CSE(30 M-10 G)\_Middle Channel\_QPSK\_1RB

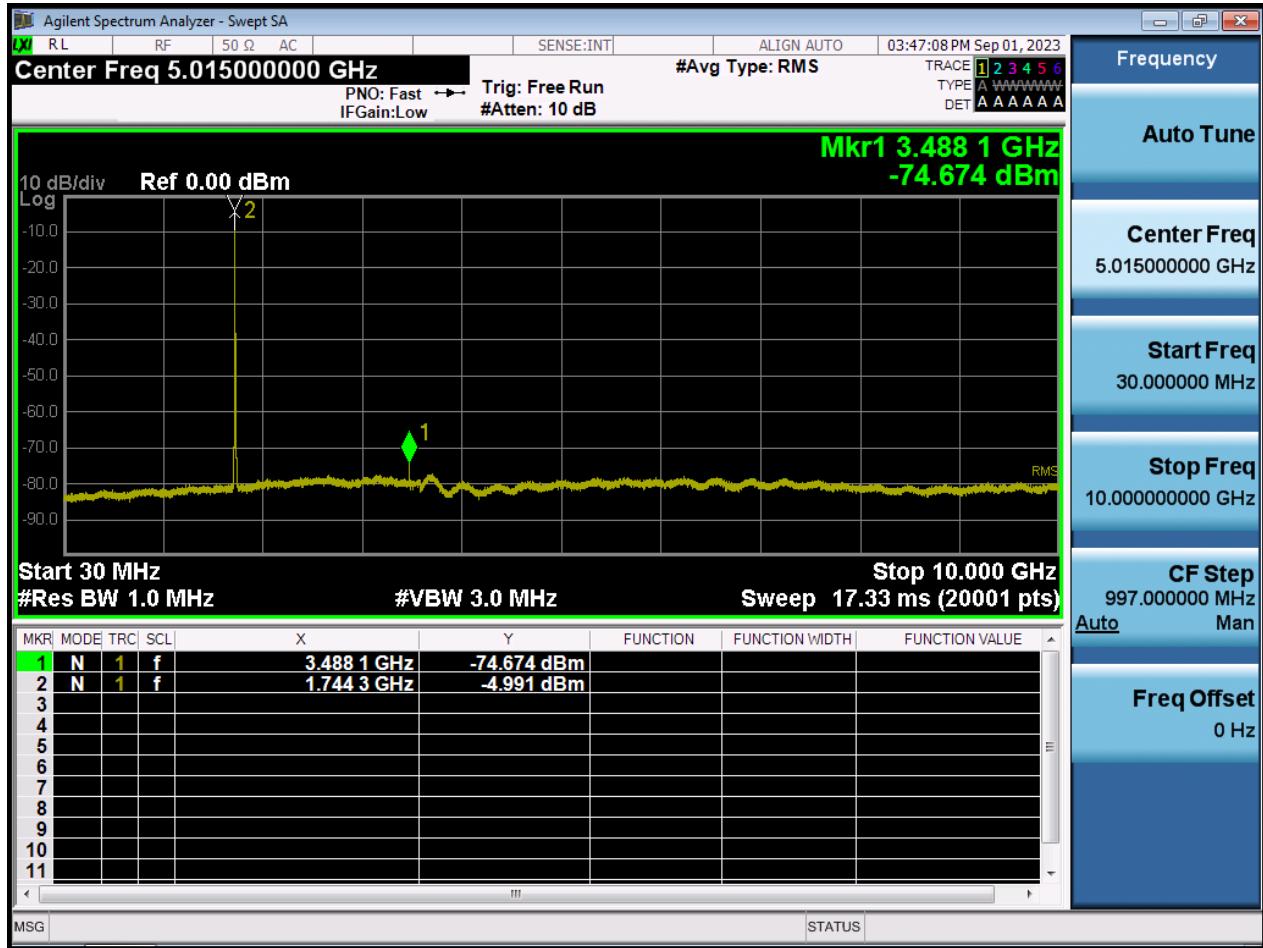

BW3 M\_CSE(30 M-10 G)\_Highest Channel\_QPSK\_1RB

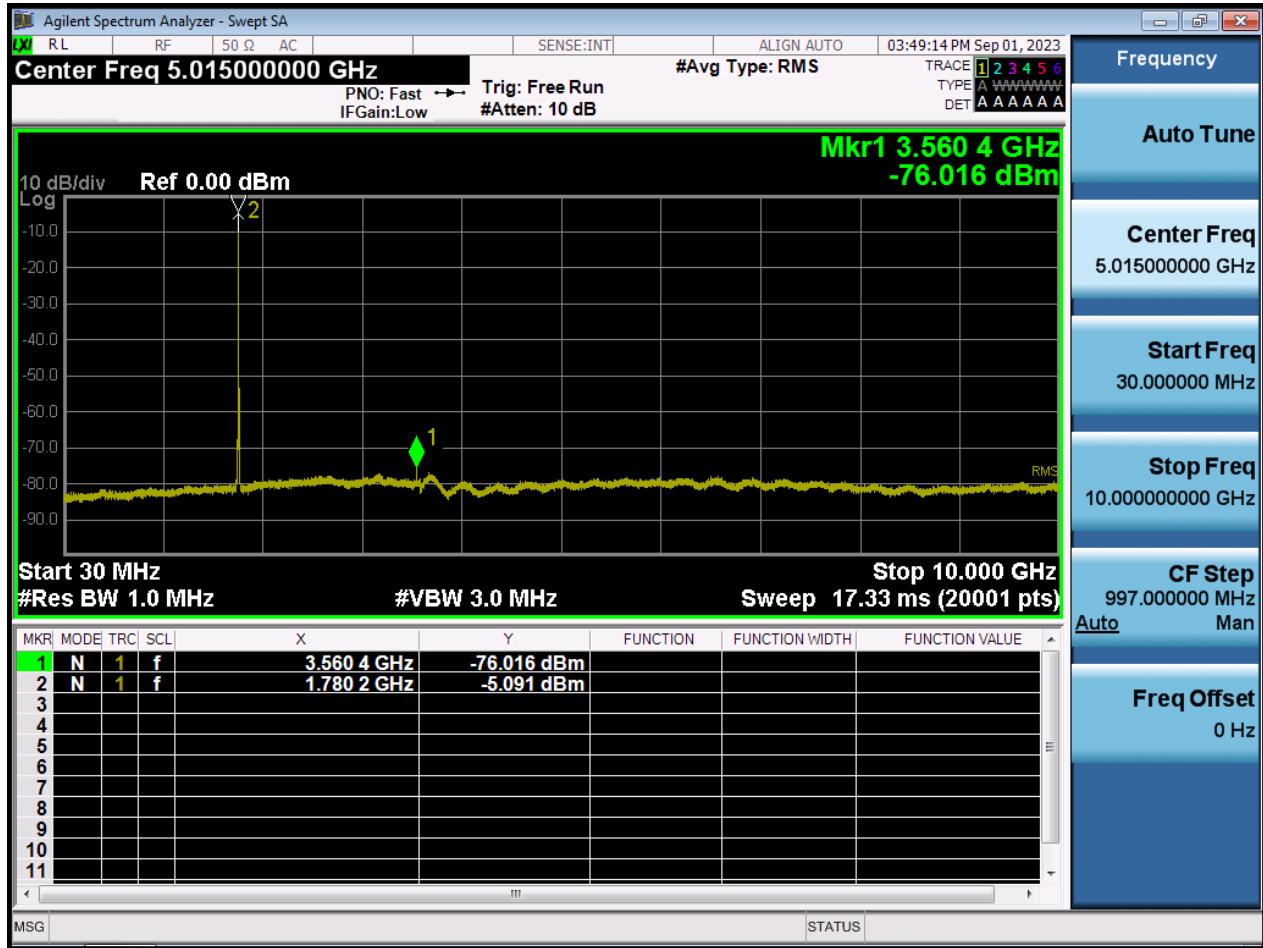

BW5 M\_CSE(30 M-10 G)\_Lowest Channel\_QPSK\_1RB

