

FCC Carrier Aggregation REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
October 16, 2023

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
Report No.: HCT-RF-2310-FC034

FCC ID: A3LSMS926U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-S926U
 Additional Model(s): SM-S926U1
 EUT Type: Mobile phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §27

Main 1 Ant

Mode (PCC+SCC)	Tx Frequency (MHz)	Modulation	Emission Designator	EIRP	
				Max. Power (dBm)	Max. Power (W)
5 MHz+5 MHz	1712.5 - 1777.5	QPSK	9M26G7D	23.36	0.217
		16QAM	9M23W7D	22.66	0.185
		64QAM	9M26W7D	21.81	0.152
		256QAM	9M24W7D	18.83	0.076
5 MHz+10 MHz	1712.8 - 1775.0	QPSK	13M9G7D	23.47	0.222
		16QAM	13M9W7D	22.88	0.194
		64QAM	13M9W7D	21.99	0.158
		256QAM	13M9W7D	18.86	0.077
10 MHz+5 MHz	1715.0 - 1777.2	QPSK	13M9G7D	23.41	0.219
		16QAM	13M9W7D	22.85	0.193
		64QAM	13M9W7D	21.76	0.150
		256QAM	13M9W7D	18.76	0.075
5 MHz+15 MHz	1713.0 - 1772.5	QPSK	18M2G7D	23.68	0.233
		16QAM	18M2W7D	23.15	0.207
		64QAM	18M2W7D	22.13	0.163
		256QAM	18M2W7D	19.18	0.083
15 MHz+5 MHz	1717.5 - 1777.0	QPSK	18M3G7D	23.22	0.210
		16QAM	18M3W7D	22.65	0.184
		64QAM	18M2W7D	20.36	0.109
		256QAM	18M2W7D	18.67	0.074
10 MHz+10 MHz	1715.0 - 1775.0	QPSK	18M9G7D	23.39	0.218
		16QAM	18M8W7D	22.78	0.190
		64QAM	18M8W7D	21.91	0.155
		256QAM	18M8W7D	18.85	0.077

Sub 2 Ant

Mode (PCC+SCC)	Tx Frequency (MHz)	Modulation	Emission Designator	EIRP	
				Max. Power (dBm)	Max. Power (W)
5 MHz+5 MHz	1712.5 - 1777.5	QPSK	9M26G7D	22.06	0.161
		16QAM	9M27W7D	21.65	0.146
		64QAM	9M27W7D	20.85	0.122
		256QAM	9M28W7D	17.72	0.059
5 MHz+10 MHz	1712.8 - 1775.0	QPSK	13M9G7D	22.11	0.163
		16QAM	13M9W7D	21.62	0.145
		64QAM	13M9W7D	20.81	0.121
		256QAM	13M9W7D	17.70	0.059
10 MHz+5 MHz	1715.0 - 1777.2	QPSK	13M9G7D	21.97	0.157
		16QAM	13M9W7D	21.62	0.145
		64QAM	13M9W7D	20.79	0.120
		256QAM	13M9W7D	17.75	0.060
5 MHz+15 MHz	1713.0 - 1772.5	QPSK	18M2G7D	22.02	0.159
		16QAM	18M2W7D	21.59	0.144
		64QAM	18M2W7D	20.74	0.119
		256QAM	18M2W7D	17.65	0.058
15 MHz+5 MHz	1717.5 - 1777.0	QPSK	18M3G7D	22.25	0.168
		16QAM	18M2W7D	21.69	0.148
		64QAM	18M3W7D	20.65	0.116
		256QAM	18M2W7D	17.55	0.057
10 MHz+10 MHz	1715.0 - 1775.0	QPSK	18M8G7D	22.10	0.162
		16QAM	18M8W7D	21.63	0.146
		64QAM	18M8W7D	20.78	0.120
		256QAM	18M8W7D	17.75	0.060

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report No.: HCT-RF-2310-FC034

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.
The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2310-FC034	October 16, 2023	- First Approval Report

Table of Contents

REVIEWED BY	3
1. GENERAL INFORMATION	6
2. INTRODUCTION.....	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION.....	7
2.3. TEST FACILITY.....	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE.....	8
3.2 RADIATED POWER	9
3.3 RADIATED SPURIOUS EMISSIONS.....	10
3.4 PEAK- TO- AVERAGE RATIO	11
3.5 OCCUPIED BANDWIDTH.....	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	14
3.7 BAND EDGE	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	17
4. LIST OF TEST EQUIPMENT.....	18
5. MEASUREMENT UNCERTAINTY	19
6. SUMMARY OF TEST RESULTS	20
7. SAMPLE CALCULATION	21
8. TEST DATA(Main 1 Ant)	23
8.1 Conducted Power	26
8.2 Equivalent Isotropic Radiated Power.....	29
8.3 Conducted Spurious Emissions.....	32
8.4 Channel Edge.....	57
8.5 Frequency Stability / Variation Of Ambient Temperature.....	73
8.6 Radiated Spurious Emissions	79
8.7 Occupied Bandwidth	82
8.8 Peak- to- Average Ratio.....	88
9. TEST DATA(Sub 2 Ant)	94
9.1 Conducted Power	97
9.2 Equivalent Isotropic Radiated Power.....	100
9.3 Conducted Spurious Emissions.....	103
9.4 Channel Edge.....	124
9.5 Frequency Stability / Variation Of Ambient Temperature.....	138
9.6 Radiated Spurious Emissions	144
9.7 Occupied Bandwidth	147
9.8 Peak- to- Average Ratio.....	153
10. ANNEX A_ TEST SETUP PHOTO	159

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMS926U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27
EUT Type:	Mobile phone
Model(s):	SM-S926U
Additional Model(s):	SM-S926U1
Tx Frequency:	1712.5 - 1777.5: 5 MHz+5 MHz 1712.8 - 1775.0: 5 MHz+10 MHz 1715.0 - 1777.2: 10 MHz+5 MHz 1713.0 - 1772.5: 5 MHz+15 MHz 1717.5 - 1777.0: 15 MHz+5 MHz 1715.0 - 1775.0: 10 MHz+10 MHz
Date(s) of Tests:	September 05, 2023 ~ October 11, 2023
Serial number:	Radiated: R3CW90B4EEV Conducted: R3CW808LYGJ(Main1 Ant), 741c314dee0f7ece(Sub2 Ant)
LTE CA :	CA 66B (Uplink)

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6, mmWave.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), WIFI 6E, Bluetooth, BT LE, NFC, UWB, WPT.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15 \text{ dB}$$

3.4 PEAK- TO- AVERAGE RATIO

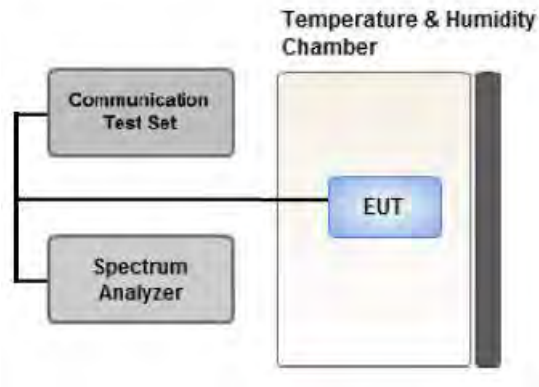

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .
Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

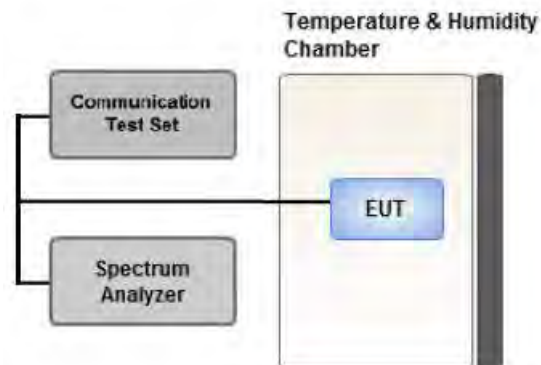

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

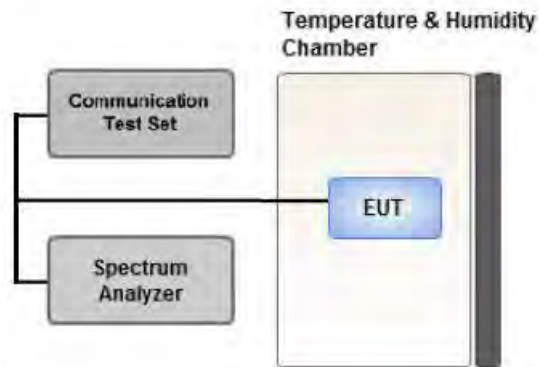

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

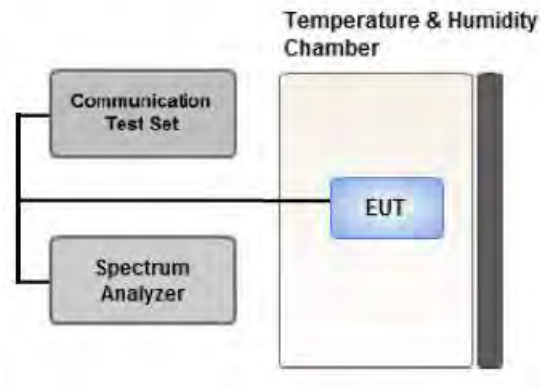

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

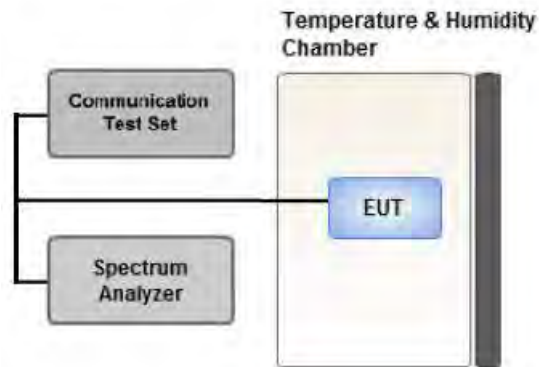

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	FBSR-02B(1.2G HPF+LNA)	T&M SYSTEM	F1L1	01/19/2024	Annual
RF Switching System	FBSR-02B(3.3G HPF+LNA)	T&M SYSTEM	F1L2	01/19/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/19/2024	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/23/2024	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/11/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/20/2024	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/19/2024	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/17/2024	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/10/2024	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	03/21/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	12/01/2023	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/05/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	06/22/2024	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/24/2024	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.16 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.57 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(h)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	PASS
Peak- to- Average Ratio	§27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(d)(4)	< 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(h)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA(Main 1 Ant)

Test Overview

The EUT is set up to transmit two contiguous LTE channels. The power level of both carriers and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Note

1. All tests were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth.
2. Channel bandwidth is shown in the tables below based only on the channel bandwidths that were supported in this device.

Channel Bandwidth (PCC)	Channel Bandwidth (SCC)	Maximum aggregated bandwidth (MHz)
5	5	10
5	10	15
10	5	15
5	15	20
15	5	20
10	10	20

3. All modes of operation were investigated and the worst case configuration results are reported in this section.

Please refer to the table below.

- Worst case(Conducted Spurious Emissions, Band Edge)
: We have selected higher of the Conduction Output Power.
- Worst case(Radiated Spurious Emissions) : We have selected higher of the EIRP.
- Worst case(OBW, PAR, Frequency stability)
: All modes of operation were investigated and the worst case configuration results are reported.

4. All modes of operation were investigated and the worst case configuration results are reported.

Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc.)

Worst case : Stand alone

5. We were performed the RSE test in condition of co-location.

Mode : Stand alone, Simultaneous transmission scenarios

Worst case : Stand alone

6. All 3 channels(low/mid/high) of conducted power and radiated power were investigated

and the worst case channel results are reported.

[Worst case]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
Conducted Spurious Emissions/ Band Edge	QPSK	Low	15	1717.5	132047	1	74	5	1726.8	132140	1	0
		Mid	15	1752.6	132398	1	74	5	1761.9	132491	1	0
		High	15	1767.7	132549	1	74	5	1777.0	132642	1	0
		Low	15	1717.5	132047	1	0	5	1726.8	132140	1	24
		Mid	15	1752.6	132398	1	0	5	1761.9	132491	1	24
		High	15	1767.7	132549	1	0	5	1777.0	132642	1	24
		Low	15	1717.5	132047	75	0	5	1726.8	132140	25	0
		Mid	15	1752.6	132398	75	0	5	1761.9	132491	25	0
		High	15	1767.7	132549	75	0	5	1777.0	132642	25	0
		Low	10	1715.0	132022	50	0	10	1724.9	132121	50	0
		Mid	10	1750.1	132373	50	0	10	1760.0	132472	50	0
		High	10	1765.1	132523	50	0	10	1775.0	132622	50	0
Radiated Spurious Emissions	QPSK	Low	5	1712.8	132000	1	24	10	1720.0	132072	1	0
		Mid	5	1748.1	132353	1	24	15	1757.4	132446	1	0
		High	5	1772.7	132599	1	24	5	1777.5	132647	1	0

[Worst case]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
OBW, PAR	QPSK, 16QAM, 64QAM, 256QAM	Mid	5	1752.6	132398	25	0	5	1757.4	132446	25	0
			5	1750.3	132375	25	0	10	1757.5	132447	50	0
			10	1752.5	132397	50	0	5	1759.7	132469	25	0
			5	1748.1	132353	25	0	15	1757.4	132446	75	0
			15	1752.6	132398	75	0	5	1761.9	132491	25	0
			10	1750.1	132373	50	0	10	1760.0	132472	50	0
Frequency stability	QPSK	Low	5	1712.5	131997	25	0	5	1717.3	132045	25	0
			10	1715.0	132022	50	0	5	1722.2	132094	25	0
			15	1717.5	132047	75	0	5	1726.8	132140	25	0
		High	5	1772.7	132599	25	0	5	1777.5	132647	25	0
			10	1770.0	132572	50	0	5	1777.2	132644	25	0
			15	1767.7	132549	75	0	5	1777.0	132642	25	0

8.1 Conducted Power

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	1712.5	131997	1	24	5	1717.3	132045	1	0	23.46
	5	1712.8	132000	1	24	10	1720.0	132072	1	0	23.46
	10	1715.0	132022	1	49	5	1722.2	132094	1	0	23.45
	5	1713.0	132002	1	24	15	1722.3	132095	1	0	23.41
	15	1717.5	132047	1	74	5	1726.8	132140	1	0	23.56
	10	1715.0	132022	1	49	10	1724.9	132121	1	0	23.50
Mid	5	1752.6	132398	1	24	5	1757.4	132446	1	0	23.71
	5	1750.3	132375	1	24	10	1757.5	132447	1	0	23.63
	10	1752.5	132397	1	49	5	1759.7	132469	1	0	23.68
	5	1748.1	132353	1	24	15	1757.4	132446	1	0	23.71
	15	1752.6	132398	1	74	5	1761.9	132491	1	0	23.94
	10	1750.1	132373	1	49	10	1760.0	132472	1	0	23.68
High	5	1772.7	132599	1	24	5	1777.5	132647	1	0	23.61
	5	1767.8	132550	1	24	10	1775.0	132622	1	0	23.67
	10	1770.0	132572	1	49	5	1777.2	132644	1	0	23.70
	5	1763.2	132504	1	24	15	1772.5	132597	1	0	23.72
	15	1767.7	132549	1	74	5	1777.0	132642	1	0	23.73
	10	1765.1	132523	1	49	10	1775.0	132622	1	0	23.69

Note:

Modulation : QPSK(1RB)

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	1712.5	131997	25	0	5	1717.3	132045	25	0	21.52
	5	1712.8	132000	25	0	10	1720.0	132072	50	0	21.47
	10	1715.0	132022	50	0	5	1722.2	132094	25	0	21.55
	5	1713.0	132002	25	0	15	1722.3	132095	75	0	21.46
	15	1717.5	132047	75	0	5	1726.8	132140	25	0	21.64
	10	1715.0	132022	50	0	10	1724.9	132121	50	0	21.56
Mid	5	1752.6	132398	25	0	5	1757.4	132446	25	0	21.78
	5	1750.3	132375	25	0	10	1757.5	132447	50	0	21.77
	10	1752.5	132397	50	0	5	1759.7	132469	25	0	21.75
	5	1748.1	132353	25	0	15	1757.4	132446	75	0	21.78
	15	1752.6	132398	75	0	5	1761.9	132491	25	0	21.80
	10	1750.1	132373	50	0	10	1760.0	132472	50	0	21.78
High	5	1772.7	132599	25	0	5	1777.5	132647	25	0	21.81
	5	1767.8	132550	25	0	10	1775.0	132622	50	0	21.79
	10	1770.0	132572	50	0	5	1777.2	132644	25	0	21.80
	5	1763.2	132504	25	0	15	1772.5	132597	75	0	21.86
	15	1767.7	132549	75	0	5	1777.0	132642	25	0	21.87
	10	1765.1	132523	50	0	10	1775.0	132622	50	0	21.85

Note:

Modulation : QPSK(Full RB)

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	15	1717.5	132047	1	74	5	1726.8	132140	1	0	23.02
Mid	15	1752.6	132398	1	74	5	1761.9	132491	1	0	23.12
High	15	1767.7	132549	1	74	5	1777.0	132642	1	0	23.00
Low	15	1717.5	132047	75	0	5	1726.8	132140	25	0	20.62
Mid	15	1752.6	132398	75	0	5	1761.9	132491	25	0	20.87
High	15	1767.7	132549	75	0	5	1777.0	132642	25	0	20.86

Note:

Modulation : 16QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	15	1717.5	132047	1	74	5	1726.8	132140	1	0	21.70
Mid	15	1752.6	132398	1	74	5	1761.9	132491	1	0	21.55
High	15	1767.7	132549	1	74	5	1777.0	132642	1	0	22.02
Low	15	1717.5	132047	75	0	5	1726.8	132140	25	0	20.61
Mid	15	1752.6	132398	75	0	5	1761.9	132491	25	0	20.82
High	15	1767.7	132549	75	0	5	1777.0	132642	25	0	20.76

Note:

Modulation : 64QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	15	1717.5	132047	1	74	5	1726.8	132140	1	0	18,85
Mid	15	1752.6	132398	1	74	5	1761.9	132491	1	0	18.83
High	15	1767.7	132549	1	74	5	1777.0	132642	1	0	18.88
Low	15	1717.5	132047	75	0	5	1726.8	132140	25	0	18.62
Mid	15	1752.6	132398	75	0	5	1761.9	132491	25	0	18.79
High	15	1767.7	132549	75	0	5	1777.0	132642	25	0	18.81

Note:

Modulation : 256QAM

8.2 Equivalent Isotropic Radiated Power

	PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
	BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
Low	5	131997	1/24	5	132045	1/0	-18.19	15.43	9.98	2.23	V	0.208	23.17
	5	132000	1/24	10	132072	1/0	-18.16	15.46	9.98	2.23	V	0.209	23.20
	10	132022	1/49	5	132094	1/0	-18.17	15.34	10.01	2.22	V	0.206	23.13
	5	132002	1/24	15	132095	1/0	-18.17	15.34	10.01	2.22	V	0.206	23.13
	15	132047	1/74	5	132140	1/0	-18.16	15.35	10.01	2.22	V	0.206	23.14
	10	132022	1/49	10	132121	1/0	-18.29	15.22	10.01	2.22	V	0.200	23.01
Mid	5	132398	1/24	5	132446	1/0	-18.33	15.35	10.18	2.17	V	0.217	23.36
	5	132375	1/24	10	132447	1/0	-18.22	15.46	10.18	2.17	V	0.222	23.47
	10	132397	1/49	5	132469	1/0	-18.28	15.40	10.18	2.17	V	0.219	23.41
	5	132353	1/24	15	132446	1/0	-18.05	15.66	10.17	2.15	V	0.233	23.68
	15	132398	1/74	5	132491	1/0	-18.44	15.21	10.19	2.18	V	0.210	23.22
	10	132373	1/49	10	132472	1/0	-18.30	15.38	10.18	2.17	V	0.218	23.39
High	5	132599	1/24	5	132647	1/0	-18.69	14.96	10.21	2.25	V	0.196	22.92
	5	132550	1/24	10	132622	1/0	-18.79	14.82	10.20	2.23	V	0.190	22.79
	10	132572	1/49	5	132644	1/0	-18.72	14.93	10.21	2.25	V	0.194	22.89
	5	132504	1/24	15	132597	1/0	-18.70	14.91	10.20	2.23	V	0.194	22.88
	15	132549	1/74	5	132642	1/0	-18.72	14.89	10.20	2.23	V	0.193	22.86
	10	132523	1/49	10	132622	1/0	-18.75	14.86	10.20	2.23	V	0.192	22.83

Note:

1. Modulation : QPSK
2. Limit : < 1 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
5	132000	1/24	10	132072	1/0	-18.80	14.82	9.98	2.23	V	0.180	22.56
5	132398	1/24	5	132446	1/0	-19.03	14.65	10.18	2.17	V	0.185	22.66
5	132375	1/24	10	132447	1/0	-18.81	14.87	10.18	2.17	V	0.194	22.88
10	132397	1/49	5	132469	1/0	-18.84	14.84	10.18	2.17	V	0.193	22.85
5	132353	1/24	15	132446	1/0	-18.58	15.13	10.17	2.15	V	0.206	23.15
15	132398	1/74	5	132491	1/0	-19.01	14.64	10.19	2.18	V	0.184	22.65
10	132373	1/49	10	132472	1/0	-18.91	14.77	10.18	2.17	V	0.190	22.78
5	132599	1/24	5	132647	1/0	-19.33	14.32	10.21	2.25	V	0.169	22.28

Note:

1. Modulation : 16QAM
2. Limit : < 1 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
5	132000	1/24	10	132072	1/0	-20.35	13.27	9.98	2.23	V	0.126	21.01
5	132398	1/24	5	132446	1/0	-19.88	13.80	10.18	2.17	V	0.152	21.81
5	132375	1/24	10	132447	1/0	-19.70	13.98	10.18	2.17	V	0.158	21.99
10	132397	1/49	5	132469	1/0	-19.93	13.75	10.18	2.17	V	0.150	21.76
5	132353	1/24	15	132446	1/0	-19.60	14.11	10.17	2.15	V	0.163	22.13
15	132398	1/74	5	132491	1/0	-21.30	12.35	10.19	2.18	V	0.109	20.36
10	132373	1/49	10	132472	1/0	-19.78	13.90	10.18	2.17	V	0.155	21.91
5	132599	1/24	5	132647	1/0	-20.22	13.43	10.21	2.25	V	0.138	21.39

Note:

1. Modulation : 64QAM
2. Limit : < 1 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
5	132000	1/24	10	132072	1/0	-22.78	10.84	9.98	2.23	V	0.072	18.58
5	132398	1/24	5	132446	1/0	-22.86	10.82	10.18	2.17	V	0.076	18.83
5	132375	1/24	10	132447	1/0	-22.83	10.85	10.18	2.17	V	0.077	18.86
10	132397	1/49	5	132469	1/0	-22.93	10.75	10.18	2.17	V	0.075	18.76
5	132353	1/24	15	132446	1/0	-22.55	11.16	10.17	2.15	V	0.083	19.18
15	132398	1/74	5	132491	1/0	-22.99	10.66	10.19	2.18	V	0.074	18.67
10	132373	1/49	10	132472	1/0	-22.84	10.84	10.18	2.17	V	0.077	18.85
5	132599	1/24	5	132647	1/0	-23.20	10.45	10.21	2.25	V	0.069	18.41

Note:

1. Modulation : 256QAM
2. Limit : < 1 Watts

8.3 Conducted Spurious Emissions

Operating frequency	PCC				SCC				Measurement Maximum Frequency (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)
	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset				
Low	15	132047	1717.5	1/74	5	132140	1726.8	1/0	3.7468	27.976	-76.29	-48.31
Mid	15	132398	1752.6	1/74	5	132491	1761.9	1/0	9.9561	28.591	-75.96	-47.37
High	15	132549	1767.7	1/74	5	132642	1777.0	1/0	9.7079	28.591	-75.88	-47.28
Low	15	132047	1717.5	1/0	5	132140	1726.8	1/24	8.0015	28.591	-75.78	-47.19
Mid	15	132398	1752.6	1/0	5	132491	1761.9	1/24	8.8724	28.591	-76.77	-48.18
High	15	132549	1767.7	1/0	5	132642	1777.0	1/24	4.0165	27.976	-75.50	-47.52
Low	15	132047	1717.5	75/0	5	132140	1726.8	25/0	4.9412	27.976	-76.10	-48.12
Mid	15	132398	1752.6	75/0	5	132491	1761.9	25/0	8.8664	28.591	-75.98	-47.39
High	15	132549	1767.7	75/0	5	132642	1777.0	25/0	4.9238	27.976	-76.36	-48.39
Low	10	132022	1715.0	50/0	10	132121	1724.9	50/0	8.2827	28.591	-75.67	-47.08
Mid	10	132373	1750.1	50/0	10	132472	1760.0	50/0	8.2812	28.591	-76.03	-47.44
High	10	132523	1765.1	50/0	10	132622	1775.0	50/0	5.5265	28.591	-76.34	-47.75

Note:


1. Modulation : QPSK
2. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter
3. Factors for frequency :

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


4. Limit : -13.0 dBm

Frequency Range : 30 MHz ~ 10 GHz


PCC 10 MHz Ch132022 RB50 Offset0 SCC 10 MHz Ch132121 RB50 Offset0

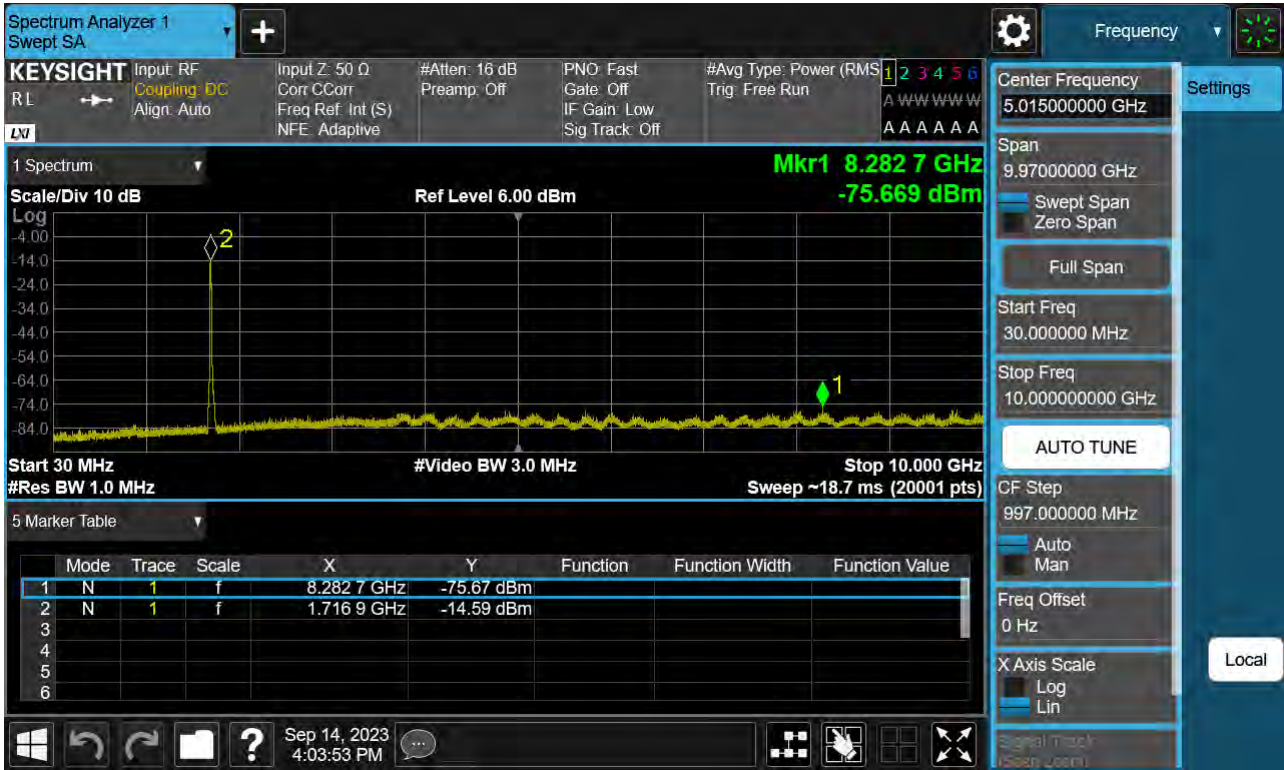


PCC 10 MHz Ch132373 RB50 Offset0 SCC 10 MHz Ch132472 RB50 Offset0

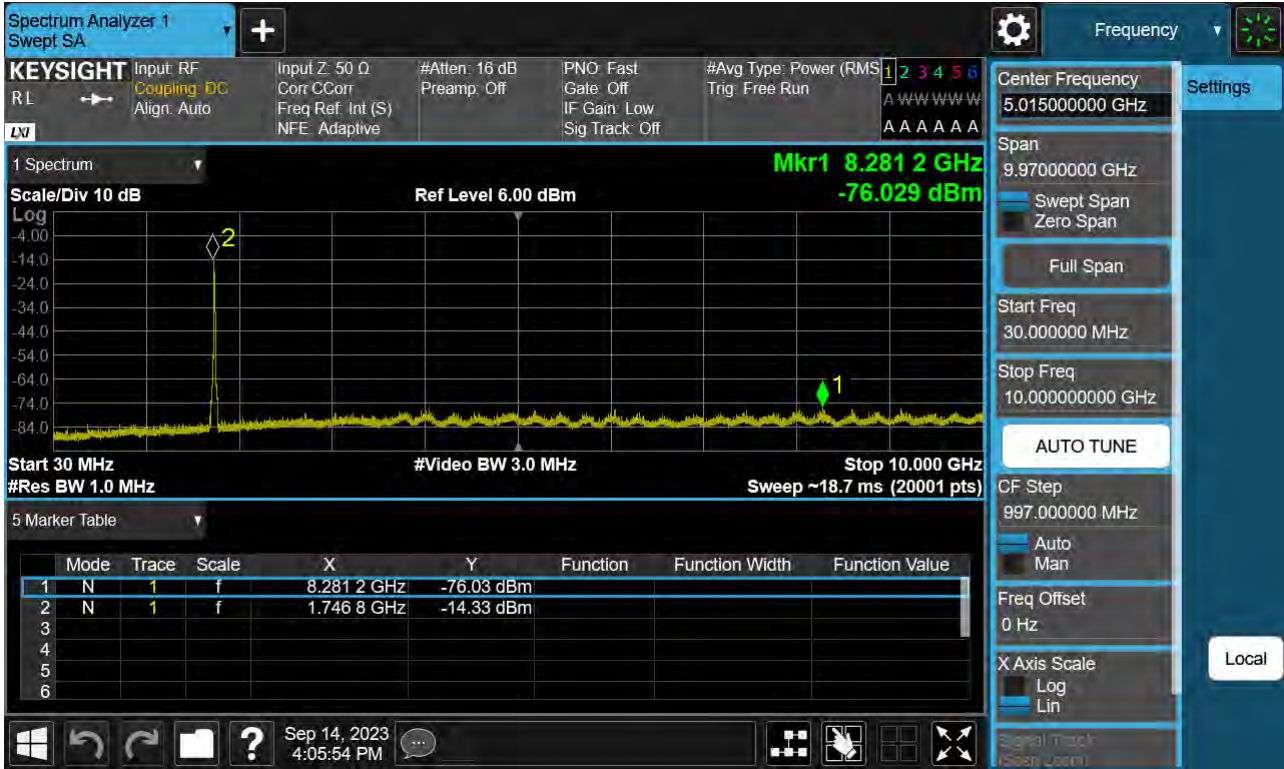

PCC 10 MHz Ch132523 RB50 Offset0 SCC 10 MHz Ch132622 RB50 Offset0

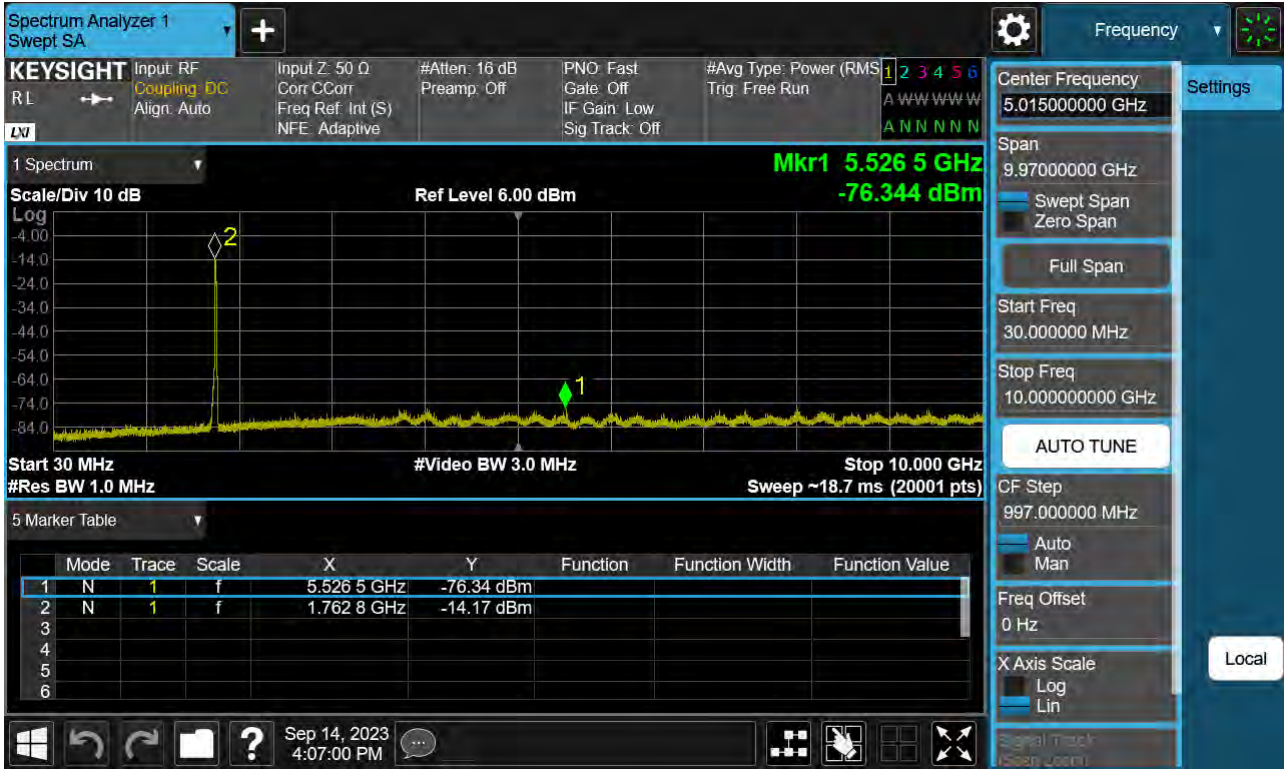


PCC 15 MHz Ch132047 RB1 Offset0 SCC 5 MHz Ch132140 RB1 Offset24

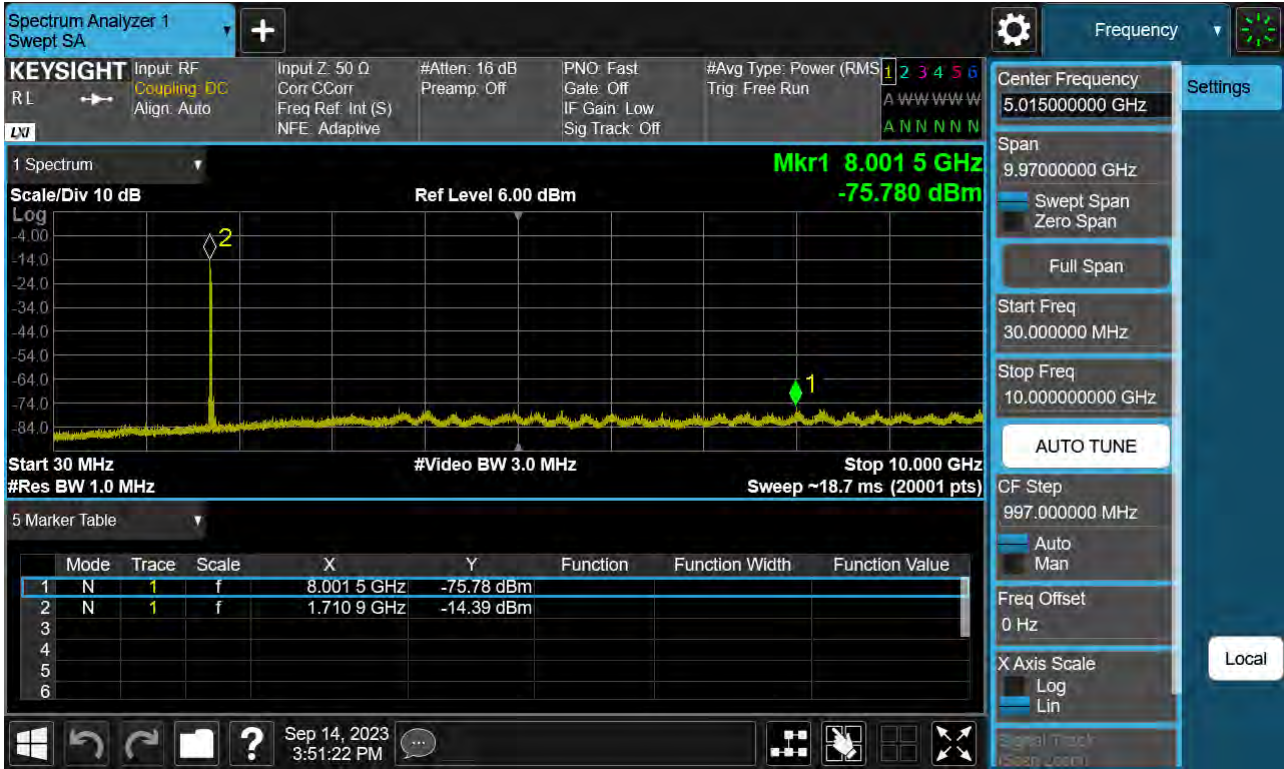


PCC 15 MHz Ch132047 RB1 Offset74 SCC 5 MHz Ch132140 RB1 Offset0




PCC 15 MHz Ch132047 RB75 Offset0 SCC 5 MHz Ch132140 RB25 Offset0

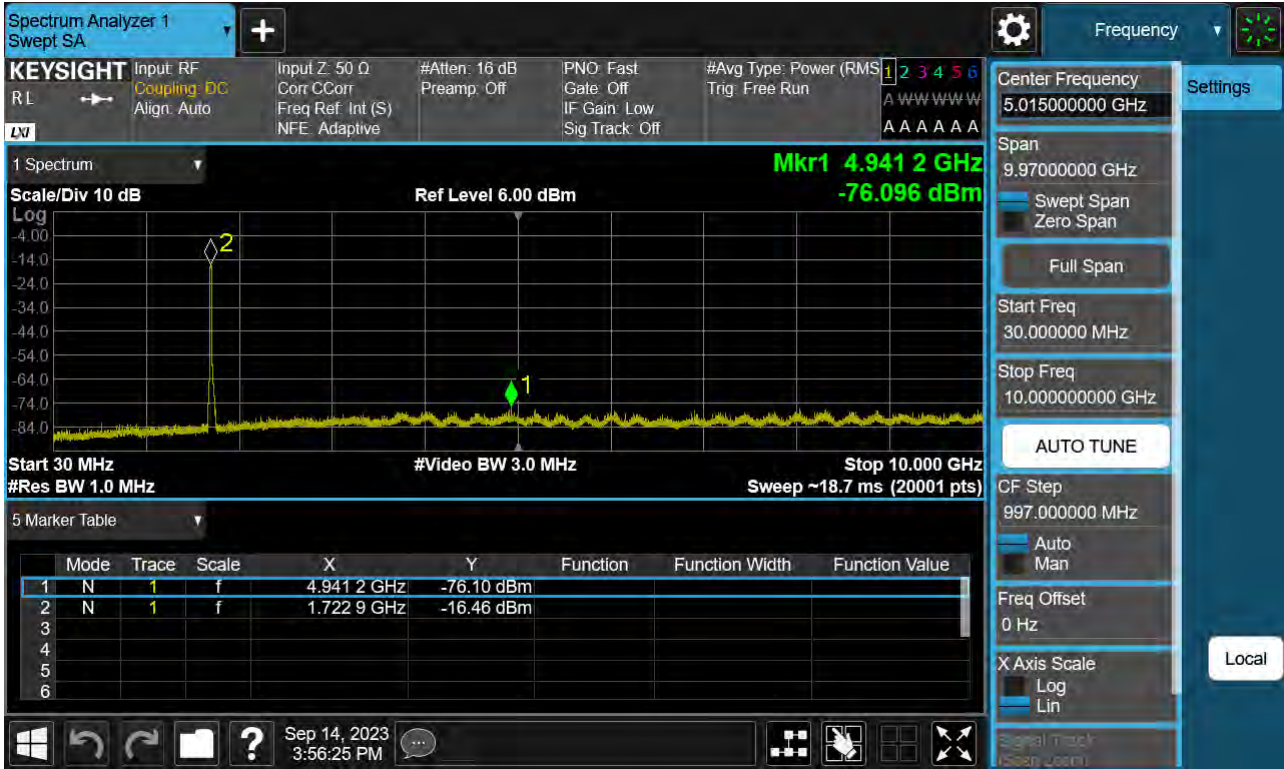

PCC 15 MHz Ch132398 RB1 Offset0 SCC 5 MHz Ch132491 RB1 Offset24

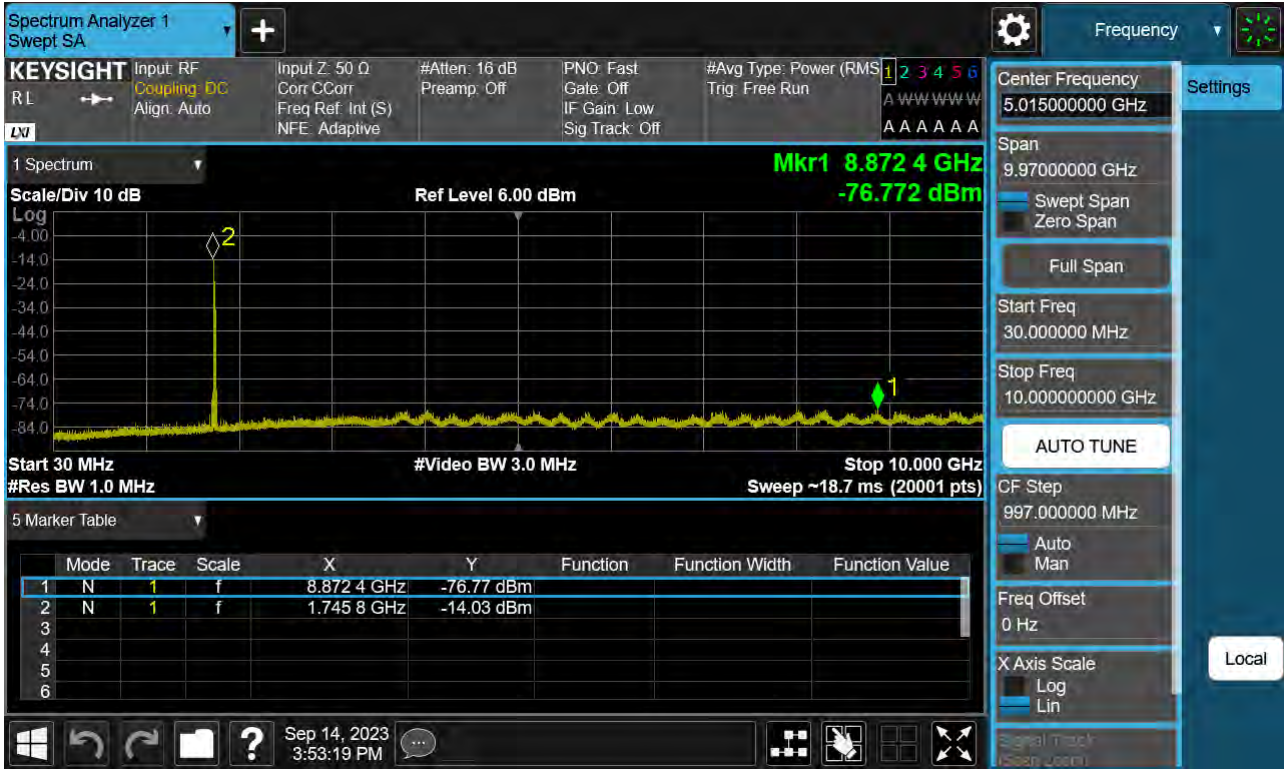


PCC 15 MHz Ch132398 RB1 Offset74 SCC 5 MHz Ch132491 RB1 Offset0

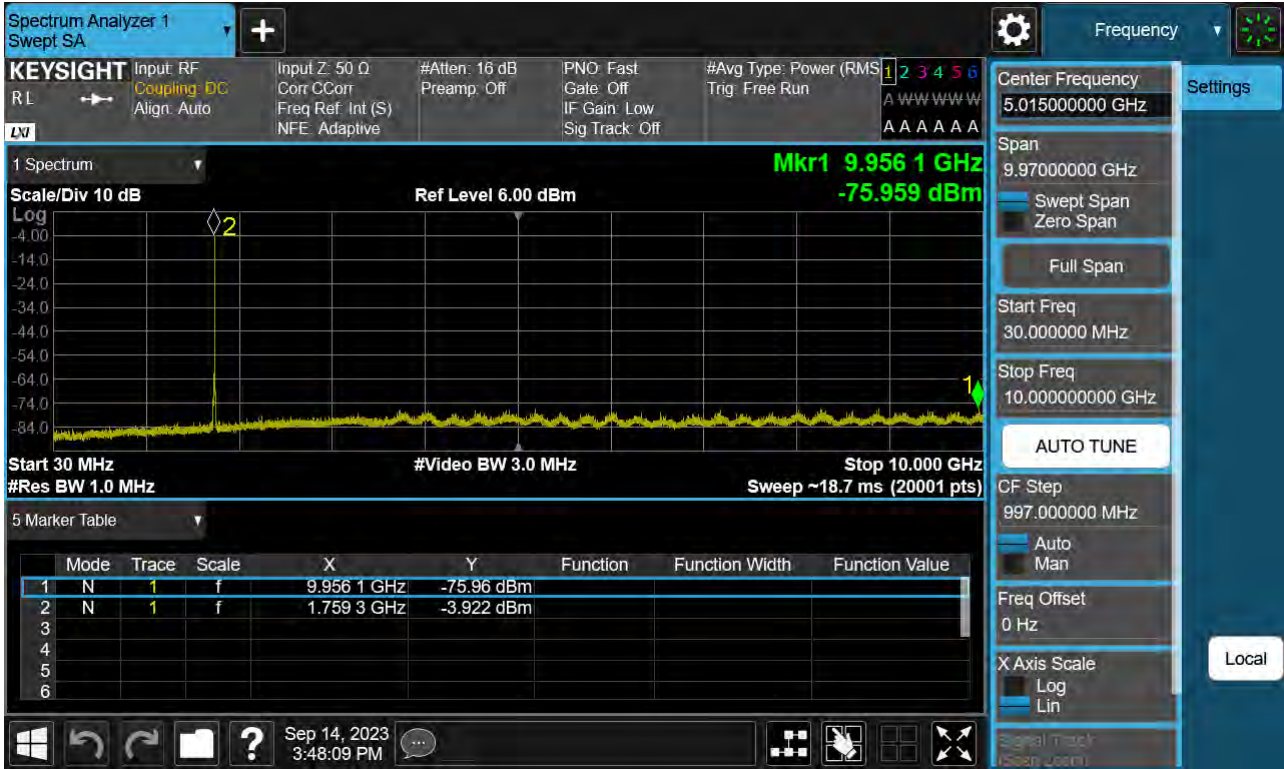


PCC 15 MHz Ch132398 RB75 Offset0 SCC 5 MHz Ch132491 RB25 Offset0




PCC 15 MHz Ch132549 RB1 Offset0 SCC 5 MHz Ch132642 RB1 Offset24

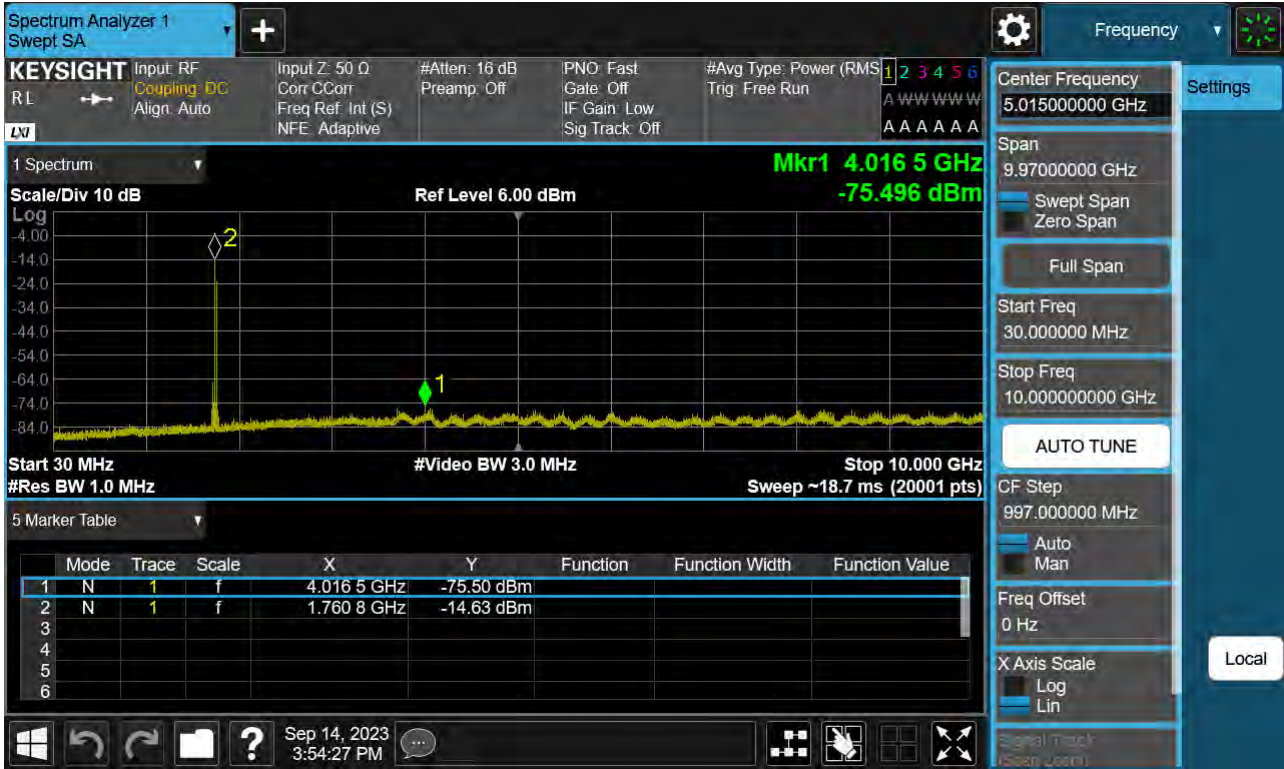

PCC 15 MHz Ch132549 RB1 Offset74 SCC 5 MHz Ch132642 RB1 Offset0

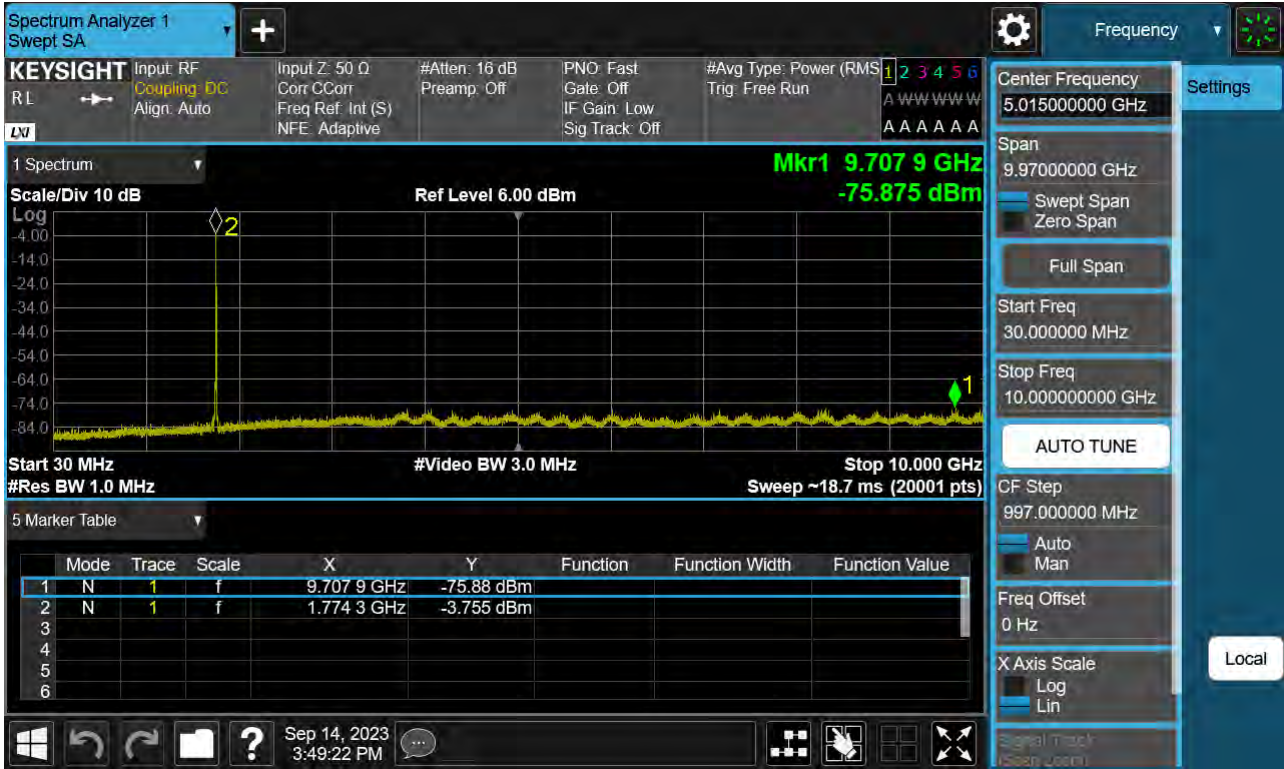


PCC 15 MHz Ch132549 RB75 Offset0 SCC 5 MHz Ch132642 RB25 Offset0

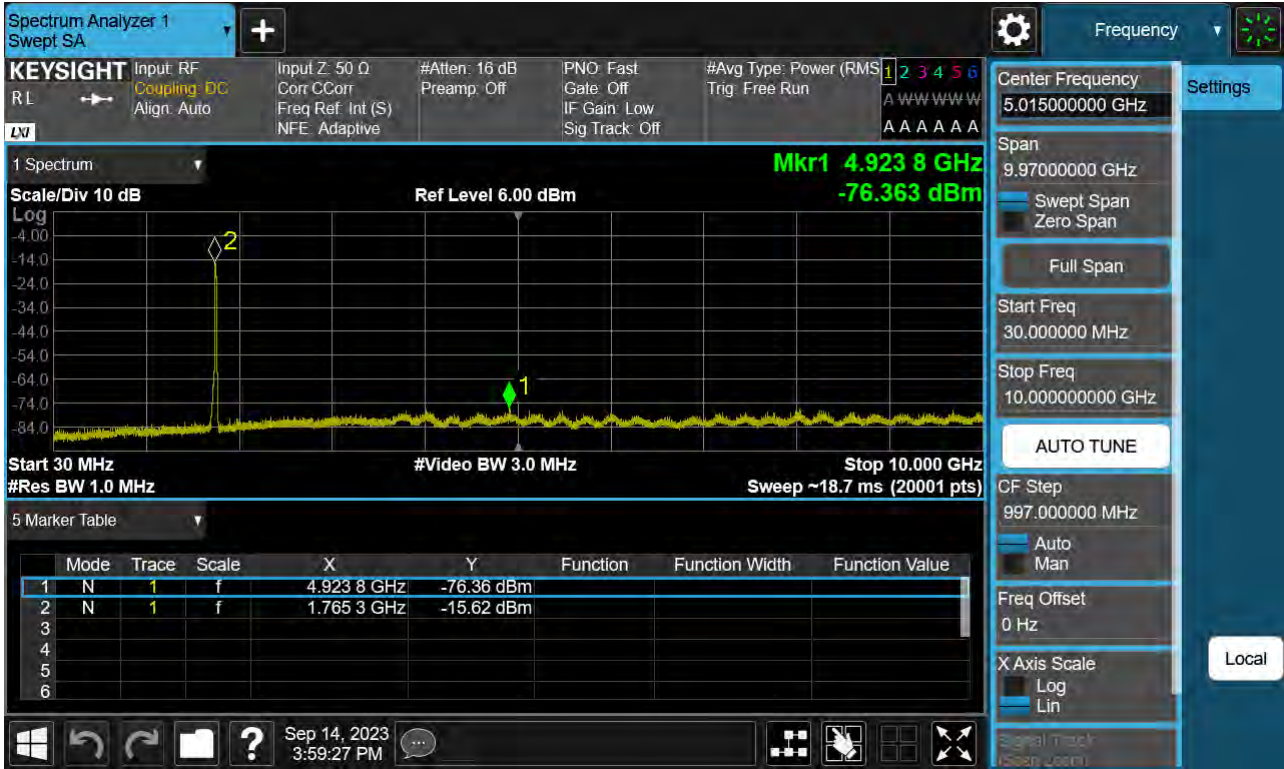


Frequency Range : 10 GHz ~ 20 GHz

PCC 10 MHz Ch132022 RB50 Offset0, SCC 10 MHz Ch132121 RB50 Offset0

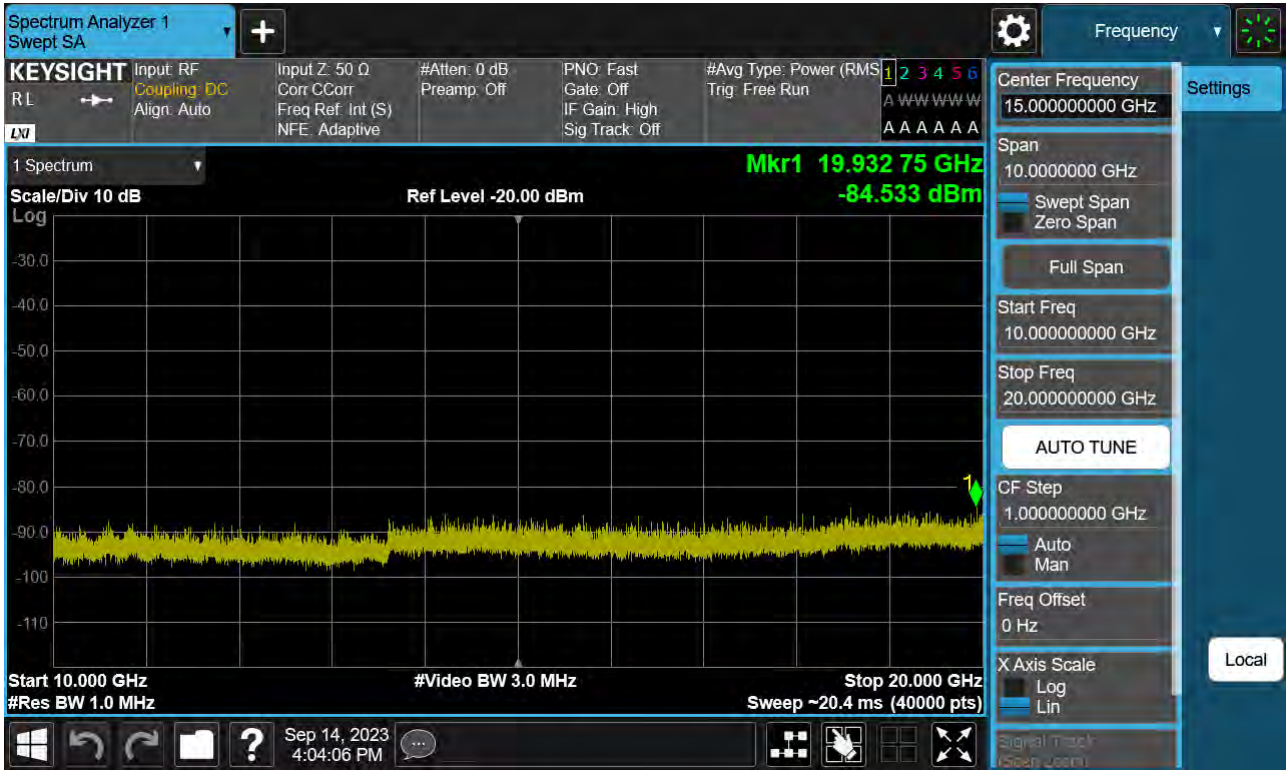

PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0

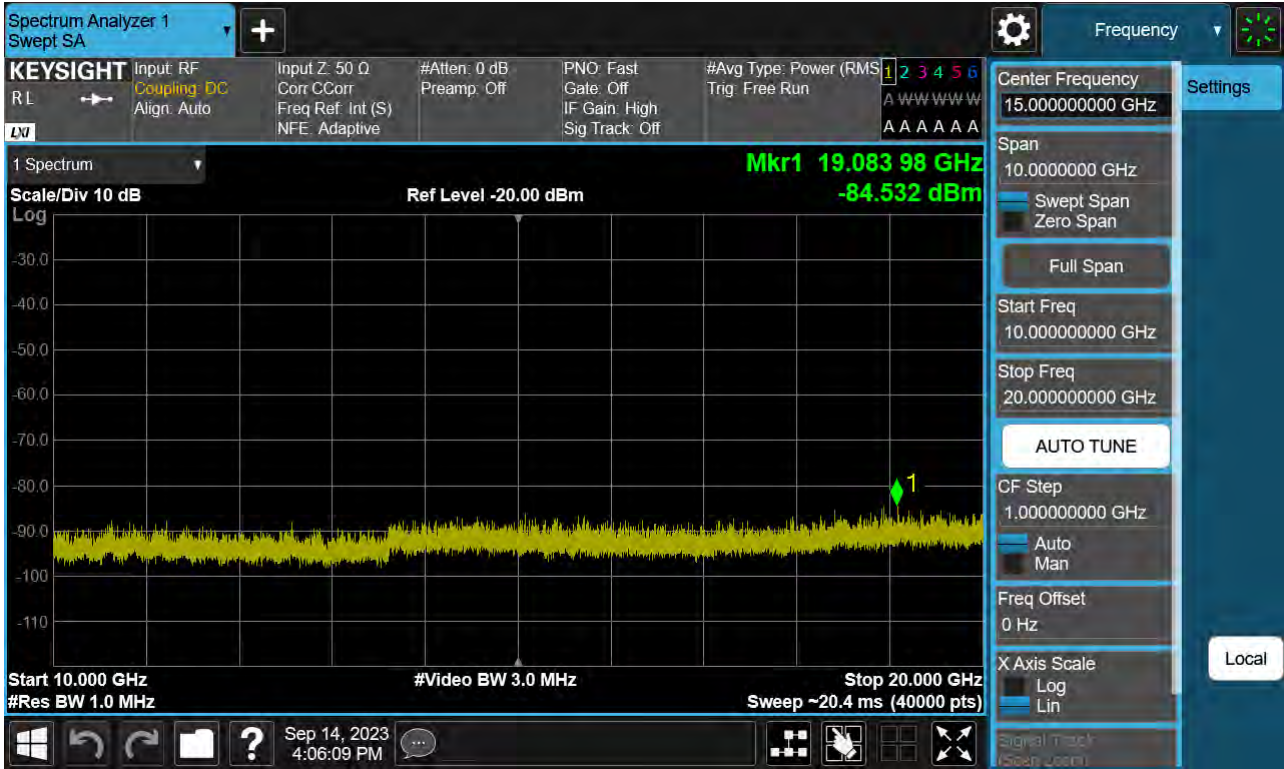

PCC 10 MHz Ch132523 RB50 Offset0, SCC 10 MHz Ch132622 RB50 Offset0



PCC 15 MHz Ch132047 RB1 Offset0, SCC 5 MHz Ch132140 RB1 Offset24



PCC 15 MHz Ch132047 RB1 Offset74, SCC 5 MHz Ch132140 RB1 Offset0



PCC 15 MHz Ch132047 RB75 Offset0, SCC 5 MHz Ch132140 RB25 Offset0



PCC 15 MHz Ch132398 RB1 Offset0, SCC 5 MHz Ch132491 RB1 Offset24




PCC 15 MHz Ch132398 RB1 Offset74, SCC 5 MHz Ch132491 RB1 Offset0



PCC 15 MHz Ch132398 RB75 Offset0, SCC 5 MHz Ch132491 RB25 Offset0




PCC 15 MHz Ch132549 RB1 Offset0, SCC 5 MHz Ch132642 RB1 Offset24

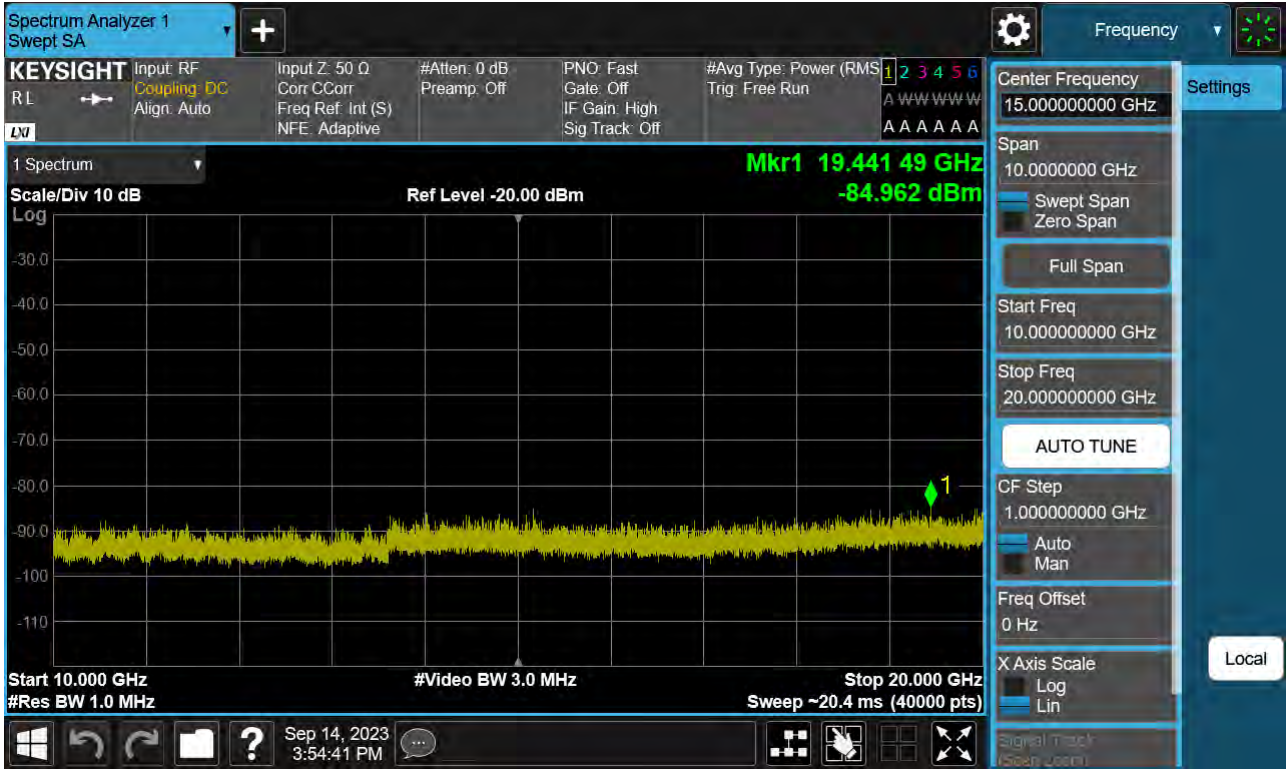

PCC 15 MHz Ch132549 RB1 Offset74, SCC 5 MHz Ch132642 RB1 Offset0



PCC 15 MHz Ch132549 RB75 Offset0, SCC 5 MHz Ch132642 RB25 Offset0

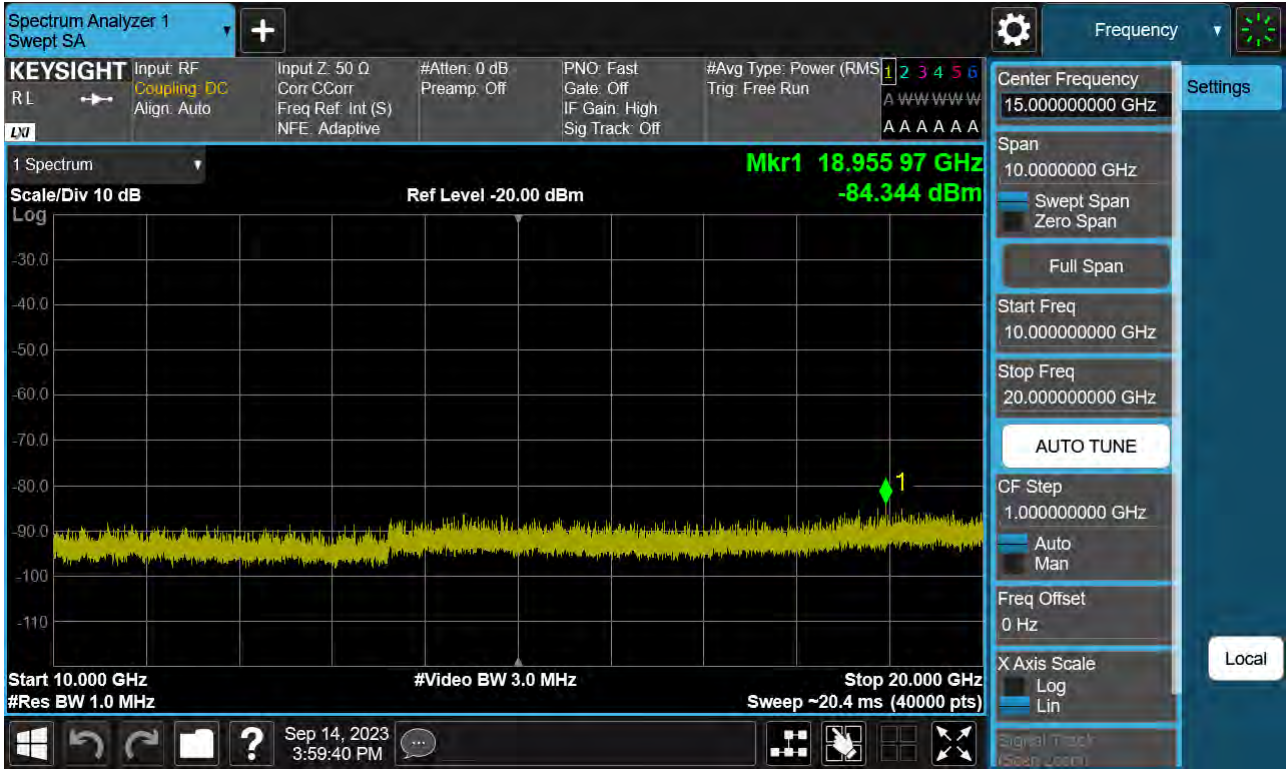


8.4 Channel Edge


Highest Channel_PCC 10 MHz Ch132523 RB50 Offset0 SCC 10 MHz Ch132622 RB50 Offset0(1)




Highest Channel_PCC 10 MHz Ch132523 RB50 Offset0 SCC 10 MHz Ch132622 RB50 Offset0(2)

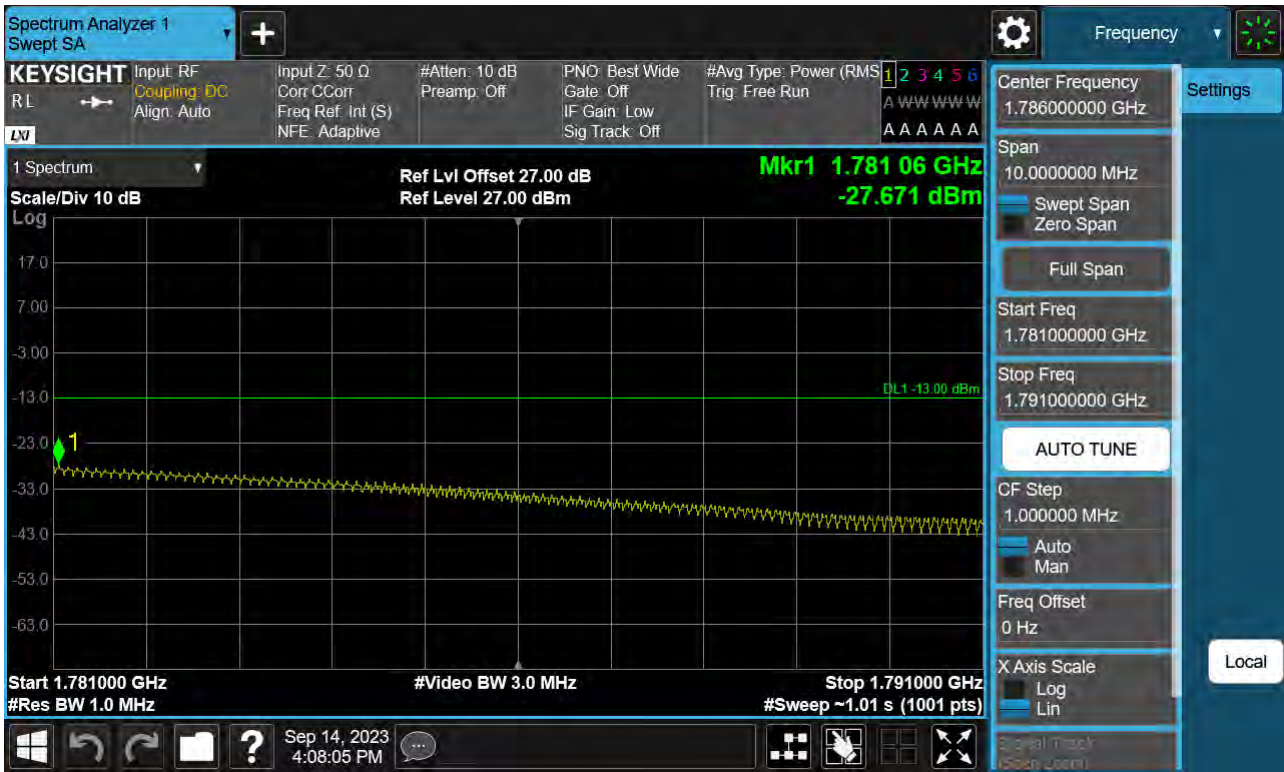

Highest Channel_PCC 15 MHz Ch132549 RB1 Offset0 SCC 5 MHz Ch132642 RB1 Offset24(1)

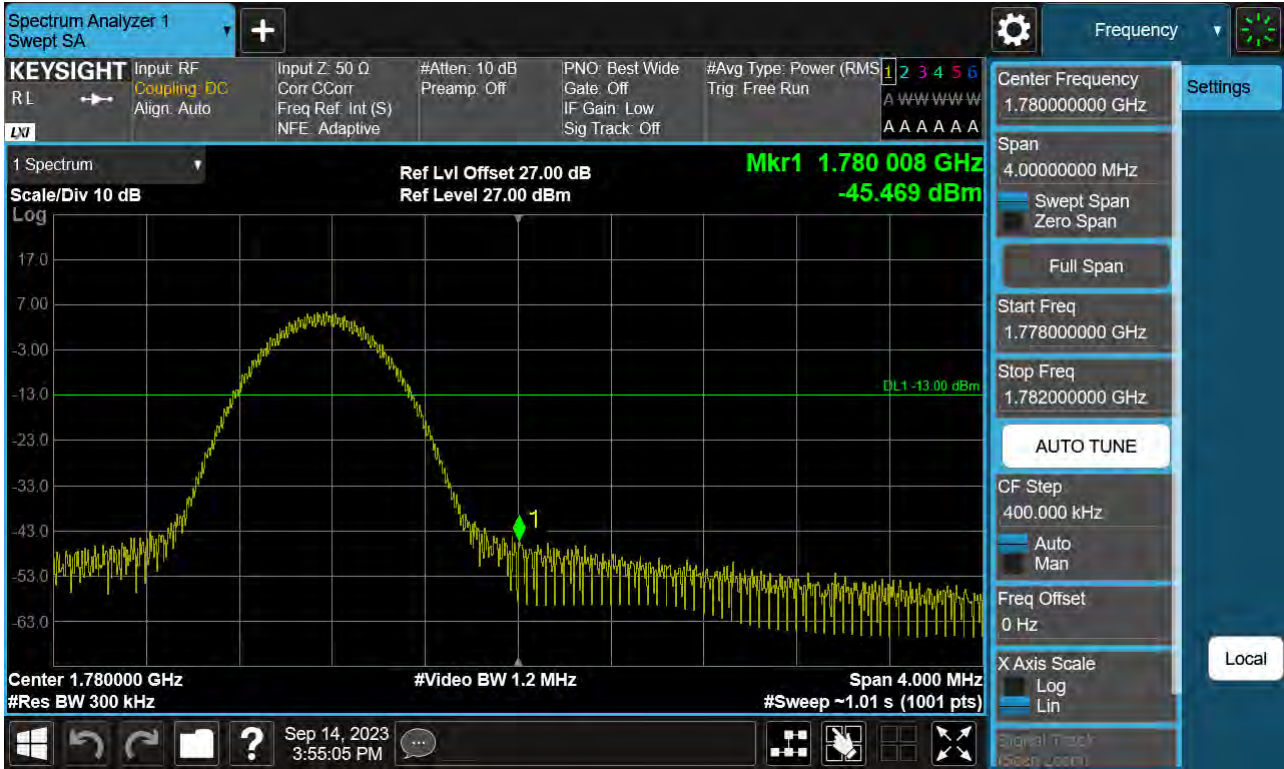


Highest Channel_PCC 15 MHz Ch132549 RB1 Offset0 SCC 5 MHz Ch132642 RB1 Offset24(2)

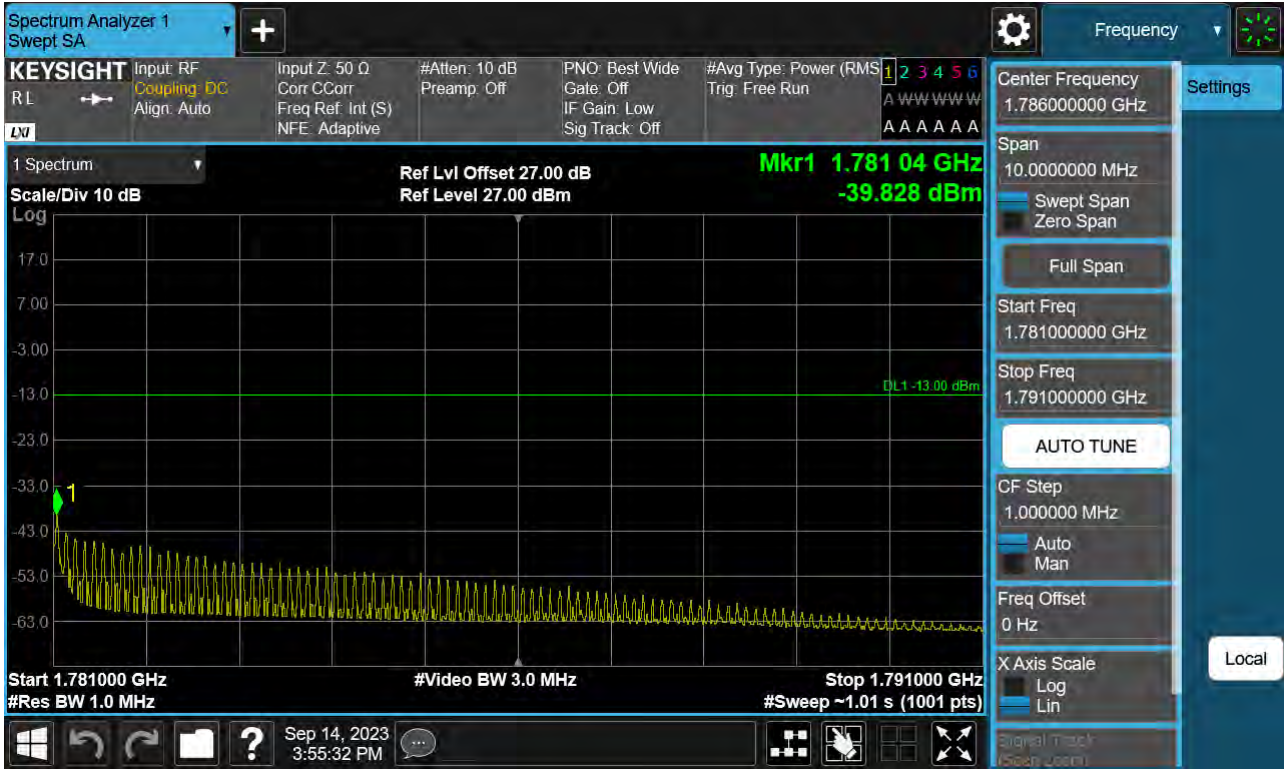

Highest Channel_PCC 15 MHz Ch132549 RB1 Offset74 SCC 5 MHz Ch132642 RB1 Offset0(1)



Highest Channel_PCC 15 MHz Ch132549 RB1 Offset74 SCC 5 MHz Ch132642 RB1 Offset0(2)

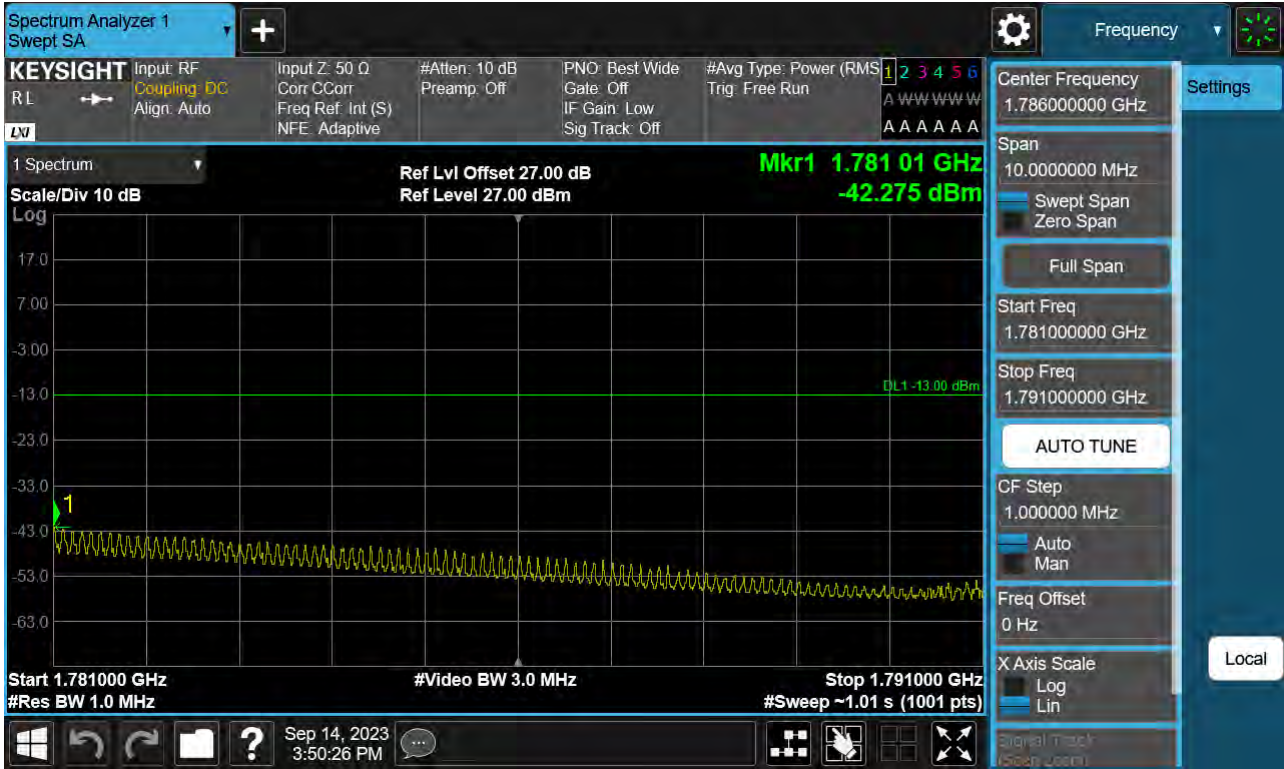


Highest Channel_PCC 15 MHz Ch132549 RB75 Offset0 SCC 5 MHz Ch132642 RB25 Offset0(1)



Highest Channel_PCC 15 MHz Ch132549 RB75 Offset0 SCC 5 MHz Ch132642 RB25 Offset0(2)




Lowest Channel_PCC 10 MHz Ch132022 RB50 Offset0 SCC 10 MHz Ch132121 RB50 Offset0(1)

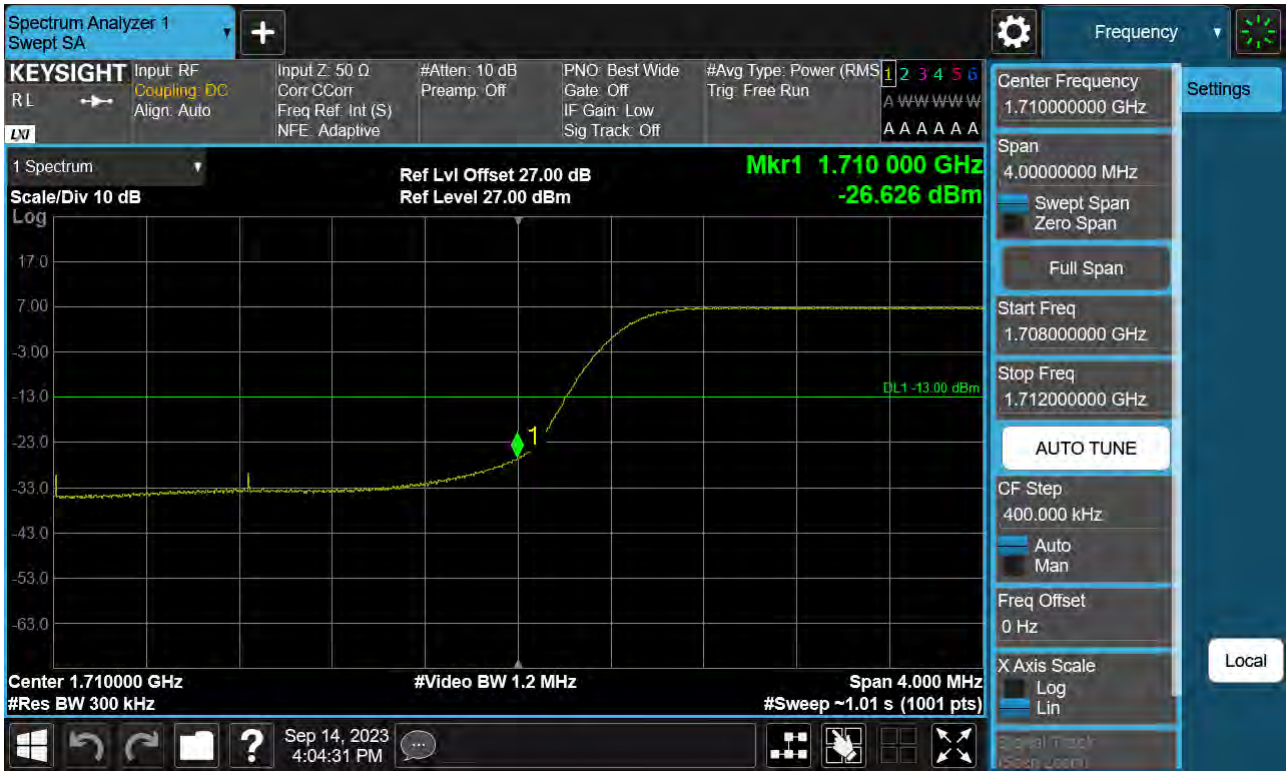

Lowest Channel_PCC 10 MHz Ch132022 RB50 Offset0 SCC 10 MHz Ch132121 RB50 Offset0(2)




Lowest Channel_PCC 15 MHz Ch132047 RB1 Offset0 SCC 5 MHz Ch132140 RB1 Offset24(1)

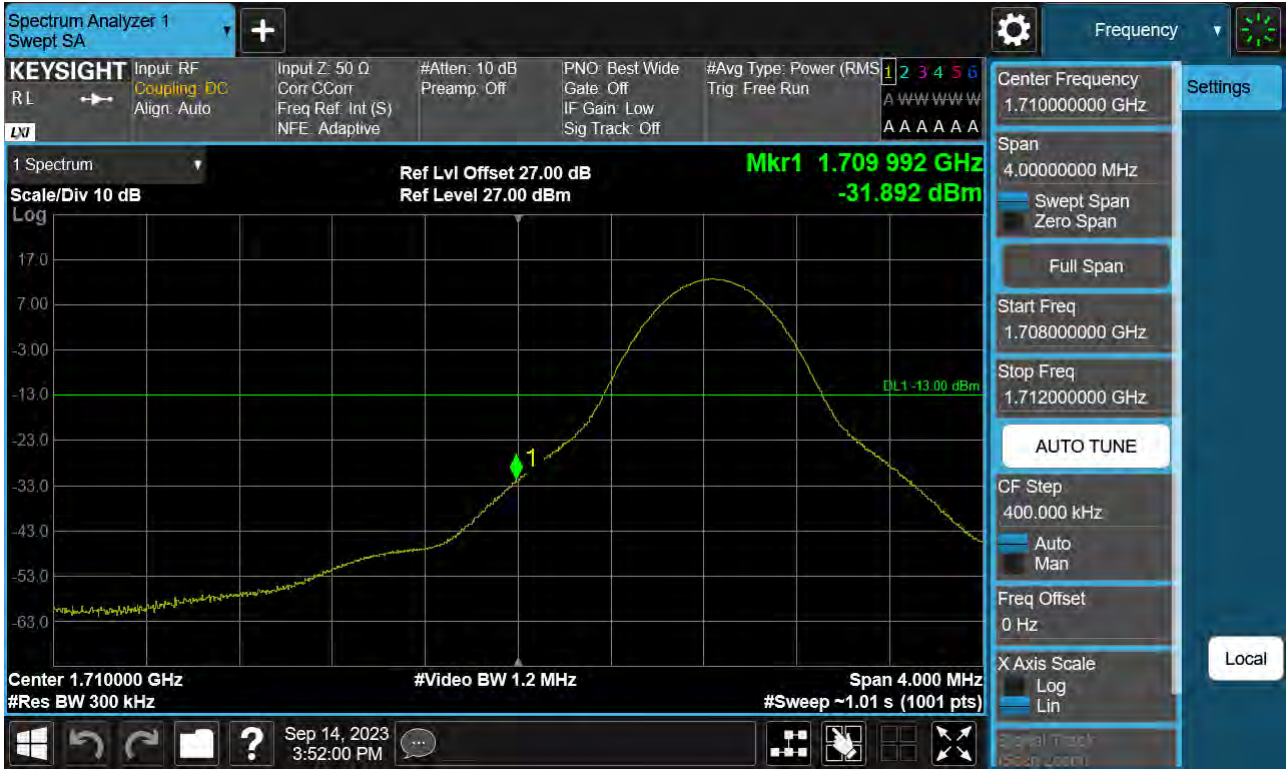


Lowest Channel_PCC 15 MHz Ch132047 RB1 Offset0 SCC 5 MHz Ch132140 RB1 Offset24(2)



Lowest Channel_PCC 15 MHz Ch132047 RB1 Offset74 SCC 5 MHz Ch132140 RB1 Offset0(1)

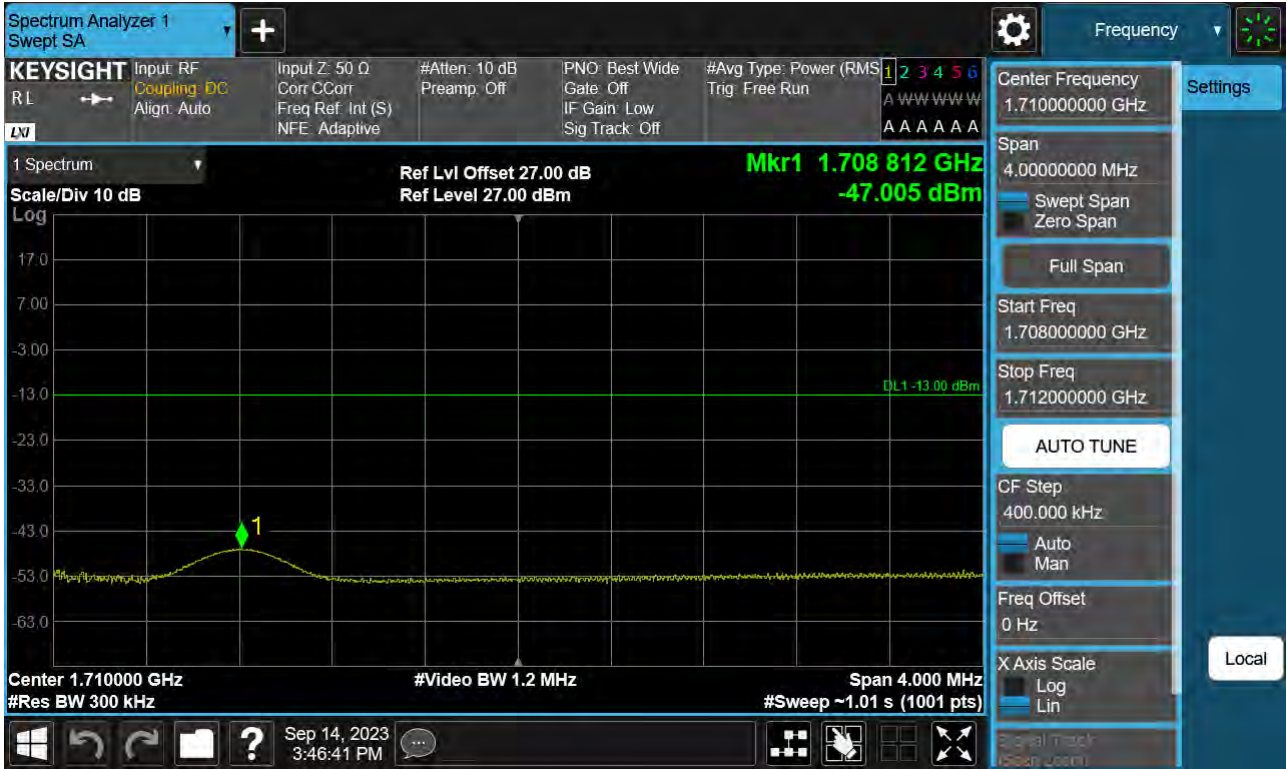

Lowest Channel_PCC 15 MHz Ch132047 RB1 Offset74 SCC 5 MHz Ch132140 RB1 Offset0(2)

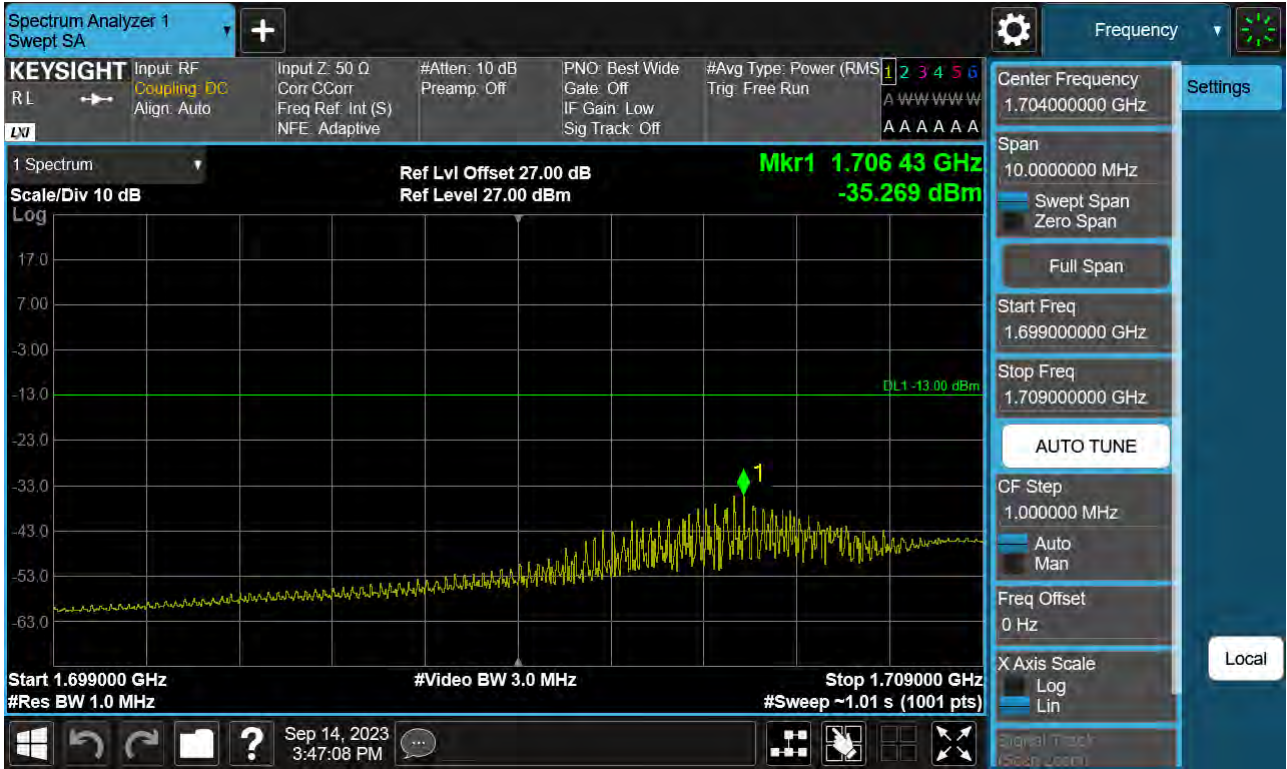

Lowest Channel_PCC 15 MHz Ch132047 RB75 Offset0 SCC 5 MHz Ch132140 RB25 Offset0(1)



Lowest Channel_PCC 15 MHz Ch132047 RB75 Offset0 SCC 5 MHz Ch132140 RB25 Offset0(2)



8.5 Frequency Stability / Variation Of Ambient Temperature

- ▣ PCC Channel: 131997
- ▣ PCC Frequency: 1712.5 MHz
- ▣ PCC BandWidth: 5 MHz
- ▣ SCC Channel: 132045
- ▣ SCC Frequency: 1717.3 MHz
- ▣ SCC BandWidth: 5 MHz
- ▣ Voltage : 3.880 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	0.032	-0.032	1712.500	1717.29994
100%		-30	0.035	0.032	1712.500	1717.30004
100%		-20	-0.039	-0.039	1712.500	1717.29985
100%		-10	0.028	0.043	1712.500	1717.29998
100%		0	0.042	-0.044	1712.500	1717.29991
100%		10	-0.041	-0.036	1712.500	1717.29993
100%		30	0.033	0.028	1712.500	1717.30004
100%		40	-0.036	0.036	1712.500	1717.30003
100%		50	0.024	-0.041	1712.500	1717.29993
Batt. Endpoint		3.300	20	0.027	0.027	1712.500

- ▣ PCC Channel: 132022
- ▣ PCC Frequency: 1715.0 MHz
- ▣ PCC BandWidth: 10 MHz
- ▣ SCC Channel: 132094
- ▣ SCC Frequency: 1722.2 MHz
- ▣ SCC BandWidth: 5 MHz
- ▣ Voltage : 3.880 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	0.036	0.019	1715.00006	1722.20003
100%		-30	0.026	0.024	1714.99998	1722.19998
100%		-20	0.027	-0.041	1715.00003	1722.19990
100%		-10	0.036	0.034	1715.00000	1722.20004
100%		0	0.028	0.023	1714.99997	1722.19998
100%		10	0.046	0.031	1715.00003	1722.20004
100%		30	0.041	0.029	1715.00000	1722.19999
100%		40	0.030	0.026	1715.00005	1722.19997
100%		50	0.039	-0.031	1715.00003	1722.19995
Batt. Endpoint	3.300	20	0.020	-0.035	1715.00004	1722.19994

- PCC Channel: 132047
- PCC Frequency: 1717.5 MHz
- PCC BandWidth: 15 MHz
- SCC Channel: 132140
- SCC Frequency: 1726.8 MHz
- SCC BandWidth: 5 MHz
- Voltage : 3.880 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	0.029	0.025	1717.50002	1726.80004
100%		-30	0.044	0.036	1717.49998	1726.80005
100%		-20	-0.053	-0.055	1717.49985	1726.79987
100%		-10	0.019	-0.037	1717.49998	1726.79990
100%		0	-0.045	-0.046	1717.49990	1726.79993
100%		10	0.027	0.032	1717.49999	1726.80004
100%		30	0.046	0.044	1717.50000	1726.80005
100%		40	0.044	0.025	1717.50004	1726.79995
100%		50	-0.035	0.039	1717.49985	1726.80006
Batt. Endpoint	3.300	20	0.018	0.034	1717.50004	1726.80002

- PCC Channel: 132599
- PCC Frequency: 1772.7 MHz
- PCC BandWidth: 5 MHz
- SCC Channel: 132647
- SCC Frequency: 1777.5 MHz
- SCC BandWidth: 5 MHz
- Voltage : 3.880 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	0.026	-0.043	1772.70002	1777.49986
100%		-30	0.046	0.043	1772.70004	1777.49998
100%		-20	0.025	0.043	1772.70000	1777.50006
100%		-10	-0.040	-0.046	1772.69991	1777.49989
100%		0	0.028	-0.030	1772.70000	1777.49988
100%		10	-0.044	0.035	1772.69992	1777.50001
100%		30	0.027	-0.031	1772.69998	1777.49987
100%		40	-0.033	0.040	1772.69993	1777.50007
100%		50	-0.047	0.033	1772.69993	1777.50005
Batt. Endpoint		3.300	20	0.030	-0.053	1772.70002

- PCC Channel: 132572
- PCC Frequency: 1770.0 MHz
- PCC BandWidth: 10 MHz
- SCC Channel: 132644
- SCC Frequency: 1777.2 MHz
- SCC BandWidth: 5 MHz
- Voltage : 3.880 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	0.035	-0.033	1770.00007	1777.19993
100%		-30	0.037	-0.050	1770.00006	1777.19990
100%		-20	-0.042	0.040	1769.99983	1777.20000
100%		-10	0.029	-0.044	1769.99998	1777.19992
100%		0	-0.042	-0.045	1769.99989	1777.19986
100%		10	0.027	-0.048	1769.99998	1777.19988
100%		30	0.042	0.033	1769.99999	1777.20005
100%		40	0.021	0.029	1770.00003	1777.20001
100%		50	-0.039	-0.055	1769.99992	1777.19985
Batt. Endpoint		3.300	20	-0.047	0.032	1769.99985

- PCC Channel: 132549
- PCC Frequency: 1767.7 MHz
- PCC BandWidth: 15 MHz
- SCC Channel: 132642
- SCC Frequency: 1777.0 MHz
- SCC BandWidth: 5 MHz
- Voltage : 3.880 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	0.023	0.027	1767.70004	1777.00004
100%		-30	-0.040	0.034	1767.69985	1777.00005
100%		-20	0.030	-0.052	1767.70004	1776.99983
100%		-10	-0.046	0.034	1767.69987	1777.00005
100%		0	-0.036	0.031	1767.69988	1776.99999
100%		10	-0.037	-0.043	1767.69986	1776.99983
100%		30	-0.039	-0.042	1767.69991	1776.99986
100%		40	-0.041	0.032	1767.69991	1777.00004
100%		50	-0.050	0.039	1767.69991	1777.00005
Batt. Endpoint		3.300	20	0.037	-0.047	1767.69998

8.6 Radiated Spurious Emissions

- ▣ PCC Channel : 132000 (1712.8 MHz)
- ▣ PCC BW(MHz) : 5
- ▣ PCC RB/ RB Offset : 1/ 24
- ▣ SCC Channel : 132072 (1720.0 MHz)
- ▣ SCC BW(MHz) : 10
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -13.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
3 432.80	-55.48	12.42	-61.93	3.09	H	-52.60
5 149.20	-56.90	12.39	-54.88	3.84	H	-46.33
6 865.60	-56.03	11.86	-49.05	4.50	H	-41.69

- ▣ PCC Channel : 132353 (1748.1 MHz)
- ▣ PCC BW(MHz) : 5
- ▣ PCC RB/ RB Offset : 1/ 24
- ▣ SCC Channel : 132446 (1757.4 MHz)
- ▣ SCC BW(MHz) : 15
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -13.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
3 505.50	-54.30	12.34	-60.52	3.11	H	-51.29
5 258.25	-55.94	12.99	-55.62	3.83	V	-46.46
7 011.00	-55.84	11.26	-47.86	4.56	H	-41.16

- ▣ PCC Channel : 132599 (1772.7 MHz)
- ▣ PCC BW(MHz) : 5
- ▣ PCC RB/ RB Offset : 1/ 24
- ▣ SCC Channel : 132647 (1777.5 MHz)
- ▣ SCC BW(MHz) : 5
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -13.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
3 550.20	-54.79	12.34	-60.36	3.23	H	-51.25
5 325.30	-55.72	13.08	-55.16	3.96	V	-46.04
7 100.40	-56.86	10.88	-47.99	4.59	H	-41.70

8.7 Occupied Bandwidth

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	QPSK	25/ 0	5	132446	1757.4	QPSK	25/ 0	9.2642
5	132375	1750.3	QPSK	25/ 0	10	132447	1757.5	QPSK	50/ 0	13.855
10	132397	1752.5	QPSK	50/ 0	5	132469	1759.7	QPSK	25/ 0	13.922
5	132353	1748.1	QPSK	25/ 0	15	132446	1757.4	QPSK	75/ 0	18.233
15	132398	1752.6	QPSK	75/ 0	5	132491	1761.9	QPSK	25/ 0	18.274
10	132373	1750.1	QPSK	50/ 0	10	132472	1760.0	QPSK	50/ 0	18.850

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	16QAM	25/ 0	5	132446	1757.4	16QAM	25/ 0	9.2299
5	132375	1750.3	16QAM	25/ 0	10	132447	1757.5	16QAM	50/ 0	13.927
10	132397	1752.5	16QAM	50/ 0	5	132469	1759.7	16QAM	25/ 0	13.935
5	132353	1748.1	16QAM	25/ 0	15	132446	1757.4	16QAM	75/ 0	18.200
15	132398	1752.6	16QAM	75/ 0	5	132491	1761.9	16QAM	25/ 0	18.285
10	132373	1750.1	16QAM	50/ 0	10	132472	1760.0	16QAM	50/ 0	18.790

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	64QAM	25/ 0	5	132446	1757.4	64QAM	25/ 0	9.2568
5	132375	1750.3	64QAM	25/ 0	10	132447	1757.5	64QAM	50/ 0	13.923
10	132397	1752.5	64QAM	50/ 0	5	132469	1759.7	64QAM	25/ 0	13.906
5	132353	1748.1	64QAM	25/ 0	15	132446	1757.4	64QAM	75/ 0	18.182
15	132398	1752.6	64QAM	75/ 0	5	132491	1761.9	64QAM	25/ 0	18.231
10	132373	1750.1	64QAM	50/ 0	10	132472	1760.0	64QAM	50/ 0	18.816

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	256QAM	25/ 0	5	132446	1757.4	256QAM	25/ 0	9.2358
5	132375	1750.3	256QAM	25/ 0	10	132447	1757.5	256QAM	50/ 0	13.874
10	132397	1752.5	256QAM	50/ 0	5	132469	1759.7	256QAM	25/ 0	13.942
5	132353	1748.1	256QAM	25/ 0	15	132446	1757.4	256QAM	75/ 0	18.212
15	132398	1752.6	256QAM	75/ 0	5	132491	1761.9	256QAM	25/ 0	18.242
10	132373	1750.1	256QAM	50/ 0	10	132472	1760.0	256QAM	50/ 0	18.807


Note:

In order to simplify the report, attached plots were only widest bandwidth(10+10).


PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0_(QPSK)




PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0_(16QAM)

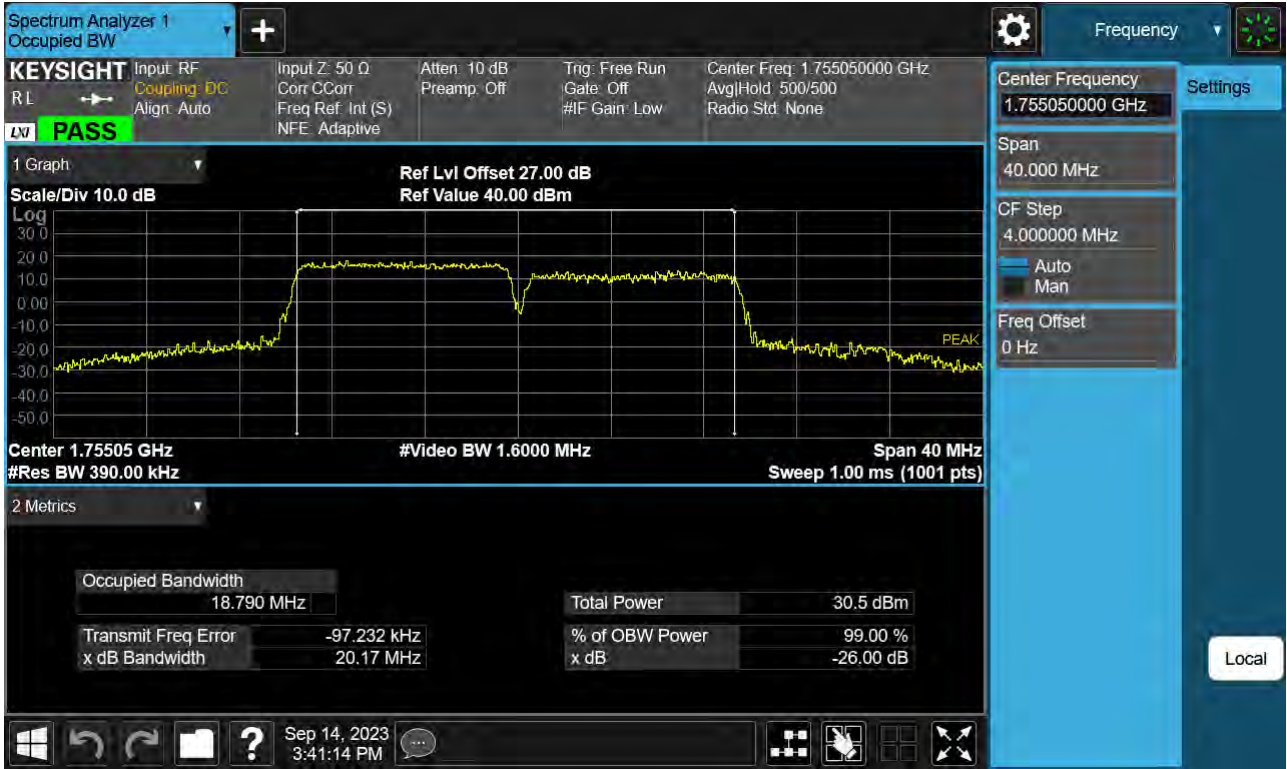

PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0_(64QAM)

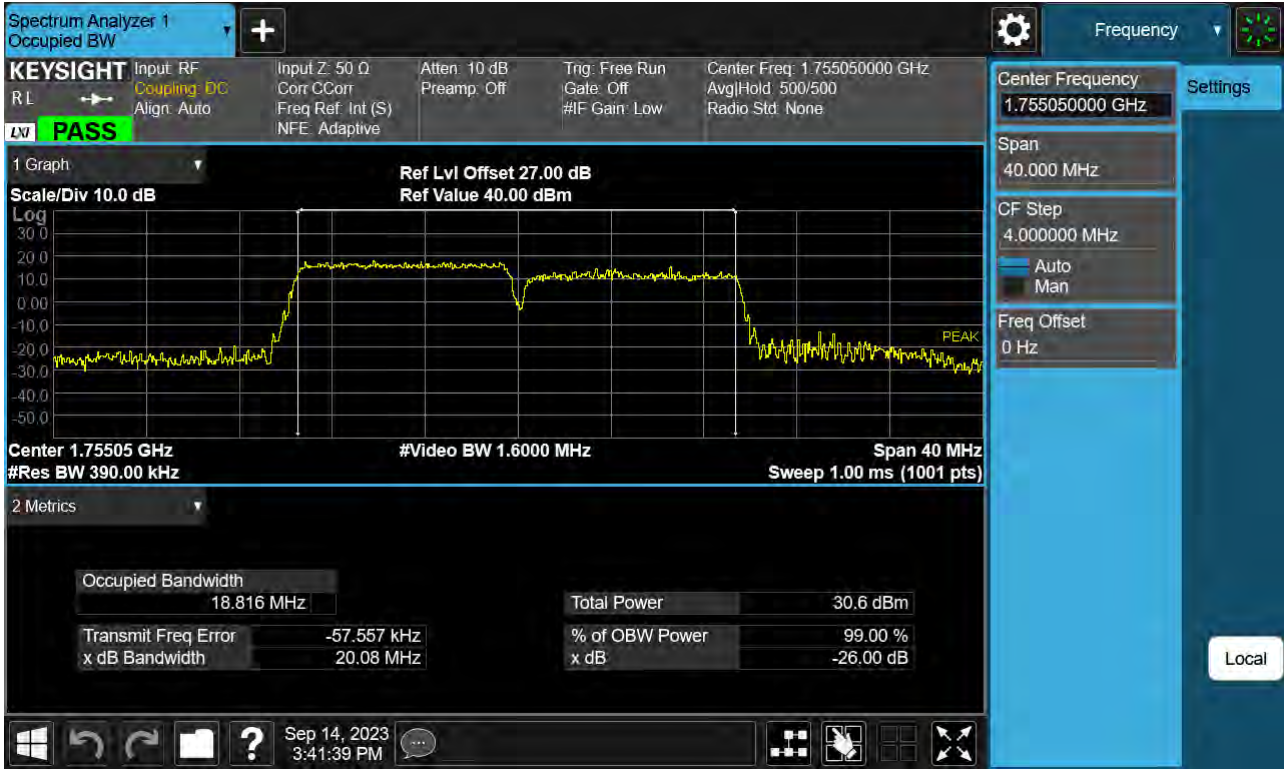

PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0_(256QAM)

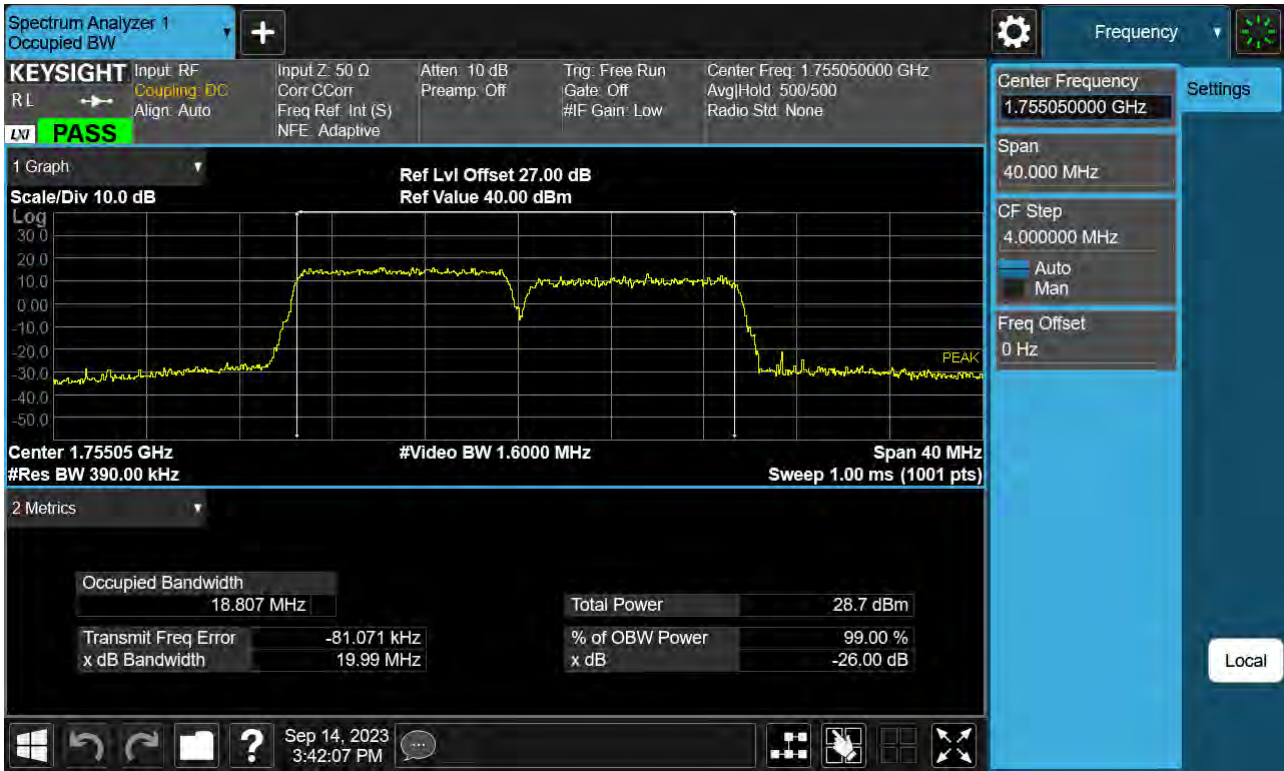

8.8 Peak- to- Average Ratio

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	QPSK	25/ 0	5	132446	1757.4	QPSK	25/ 0	5.26
5	132375	1750.3	QPSK	25/ 0	10	132447	1757.5	QPSK	50/ 0	5.26
10	132397	1752.5	QPSK	50/ 0	5	132469	1759.7	QPSK	25/ 0	5.34
5	132353	1748.1	QPSK	25/ 0	15	132446	1757.4	QPSK	75/ 0	5.23
15	132398	1752.6	QPSK	75/ 0	5	132491	1761.9	QPSK	25/ 0	5.35
10	132373	1750.1	QPSK	50/ 0	10	132472	1760.0	QPSK	50/ 0	5.35

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	16QAM	25/ 0	5	132446	1757.4	16QAM	25/ 0	6.07
5	132375	1750.3	16QAM	25/ 0	10	132447	1757.5	16QAM	50/ 0	6.32
10	132397	1752.5	16QAM	50/ 0	5	132469	1759.7	16QAM	25/ 0	6.39
5	132353	1748.1	16QAM	25/ 0	15	132446	1757.4	16QAM	75/ 0	6.26
15	132398	1752.6	16QAM	75/ 0	5	132491	1761.9	16QAM	25/ 0	6.35
10	132373	1750.1	16QAM	50/ 0	10	132472	1760.0	16QAM	50/ 0	6.39


PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	64QAM	25/ 0	5	132446	1757.4	64QAM	25/ 0	6.81
5	132375	1750.3	64QAM	25/ 0	10	132447	1757.5	64QAM	50/ 0	6.83
10	132397	1752.5	64QAM	50/ 0	5	132469	1759.7	64QAM	25/ 0	6.78
5	132353	1748.1	64QAM	25/ 0	15	132446	1757.4	64QAM	75/ 0	6.76
15	132398	1752.6	64QAM	75/ 0	5	132491	1761.9	64QAM	25/ 0	6.75
10	132373	1750.1	64QAM	50/ 0	10	132472	1760.0	64QAM	50/ 0	6.91

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	256QAM	25/ 0	5	132446	1757.4	256QAM	25/ 0	7.11
5	132375	1750.3	256QAM	25/ 0	10	132447	1757.5	256QAM	50/ 0	7.06
10	132397	1752.5	256QAM	50/ 0	5	132469	1759.7	256QAM	25/ 0	7.07
5	132353	1748.1	256QAM	25/ 0	15	132446	1757.4	256QAM	75/ 0	7.05
15	132398	1752.6	256QAM	75/ 0	5	132491	1761.9	256QAM	25/ 0	7.00
10	132373	1750.1	256QAM	50/ 0	10	132472	1760.0	256QAM	50/ 0	7.15

Note:

In order to simplify the report, attached plots were only widest bandwidth(10+10).

PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0_(QPSK)

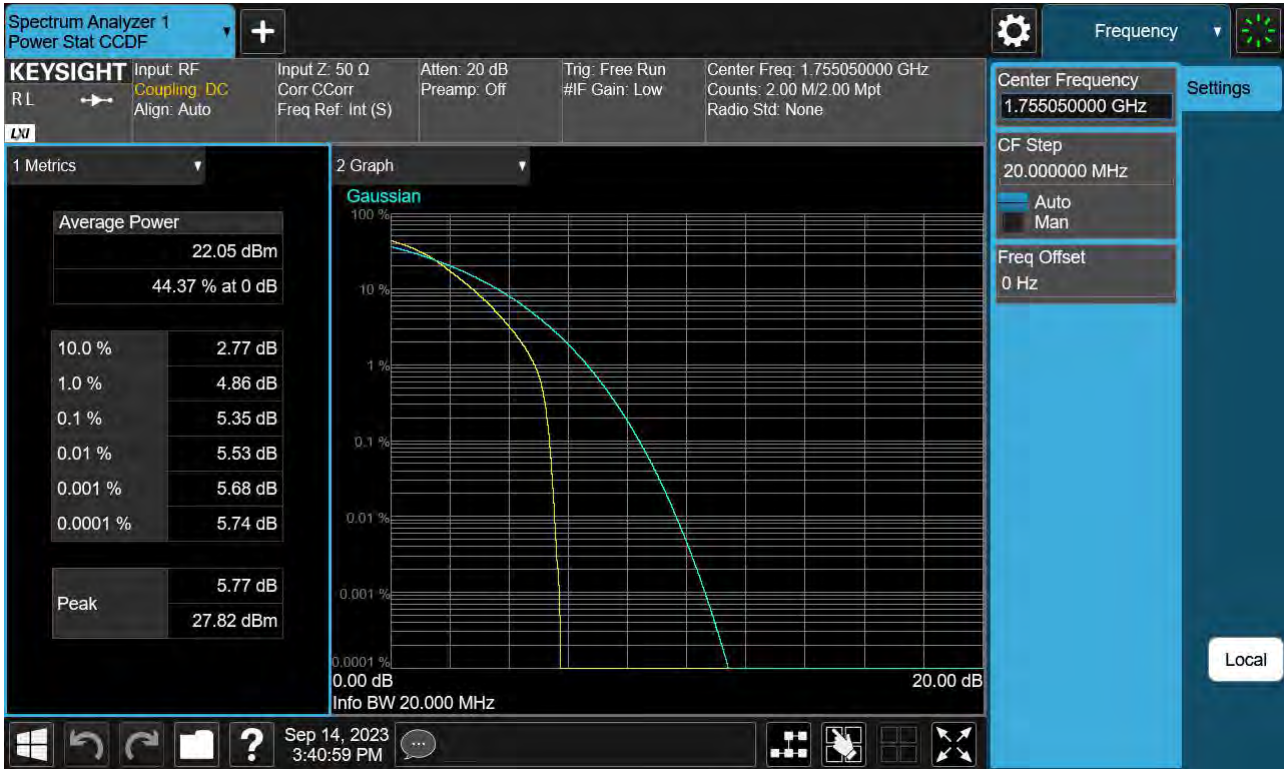

PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0_(16QAM)



PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0_(64QAM)



FCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0_(256QAM)



9. TEST DATA(Sub 2 Ant)

Test Overview

The EUT is set up to transmit two contiguous LTE channels. The power level of both carriers and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Note

1. All tests were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth.
2. Channel bandwidth is shown in the tables below based only on the channel bandwidths that were supported in this device.

Channel Bandwidth (PCC)	Channel Bandwidth (SCC)	Maximum aggregated bandwidth (MHz)
5	5	10
5	10	15
10	5	15
5	15	20
15	5	20
10	10	20

3. All modes of operation were investigated and the worst case configuration results are reported in this section.

Please refer to the table below.

- Worst case(Conducted Spurious Emissions, Band Edge)
: We have selected higher of the Conduction Output Power.
- Worst case(Radiated Spurious Emissions) : We have selected higher of the EIRP.
- Worst case(OBW, PAR, Frequency stability)
: All modes of operation were investigated and the worst case configuration results are reported.

4. All modes of operation were investigated and the worst case configuration results are reported.

Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc.)

Worst case : Stand alone

5. We were performed the RSE test in condition of co-location.

Mode : Stand alone, Simultaneous transmission scenarios

Worst case : Stand alone

6. All 3 channels(low/mid/high) of conducted power and radiated power were investigated

and the worst case channel results are reported.

[Worst case]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
Conducted Spurious Emissions/ Band Edge	QPSK	Low	5	1713.0	132002	1	24	15	1722.3	132095	1	0
		Mid	5	1748.1	132353	1	24	15	1757.4	132446	1	0
		High	5	1767.8	132550	1	24	10	1775.0	132622	1	0
		Low	5	1713.0	132002	1	0	15	1722.3	132095	1	74
		Mid	5	1748.1	132353	1	0	15	1757.4	132446	1	74
		High	5	1767.8	132550	1	0	10	1775.0	132622	1	49
		Low	10	1715.0	132022	50	0	10	1724.9	132121	50	0
		Mid	10	1750.1	132373	50	0	10	1760.0	132472	50	0
		High	5	1772.7	132599	25	0	5	1777.5	132647	25	0
		High	10	1765.1	132523	50	0	10	1775.0	132622	50	0
Radiated Spurious Emissions	QPSK	Low	15	1717.5	132047	1	74	5	1726.8	132140	1	0
		Mid	5	1748.1	132353	1	24	15	1757.4	132446	1	0
		High	5	1763.2	132504	1	24	15	1772.5	132597	1	0

[Worst case]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
OBW, PAR	QPSK, 16QAM, 64QAM, 256QAM	Mid	5	1752.6	132398	25	0	5	1757.4	132446	25	0
			5	1750.3	132375	25	0	10	1757.5	132447	50	0
			10	1752.5	132397	50	0	5	1759.7	132469	25	0
			5	1748.1	132353	25	0	15	1757.4	132446	75	0
			15	1752.6	132398	75	0	5	1761.9	132491	25	0
			10	1750.1	132373	50	0	10	1760.0	132472	50	0
Frequency stability	QPSK	Low	5	1712.5	131997	25	0	5	1717.3	132045	25	0
			10	1715.0	132022	50	0	5	1722.2	132094	25	0
			15	1717.5	132047	75	0	5	1726.8	132140	25	0
		High	5	1772.7	132599	25	0	5	1777.5	132647	25	0
			10	1770.0	132572	50	0	5	1777.2	132644	25	0
			15	1767.7	132549	75	0	5	1777.0	132642	25	0

9.1 Conducted Power

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	1712.5	131997	1	24	5	1717.3	132045	1	0	23.59
	5	1712.8	132000	1	24	10	1720.0	132072	1	0	23.69
	10	1715.0	132022	1	49	5	1722.2	132094	1	0	23.73
	5	1713.0	132002	1	24	15	1722.3	132095	1	0	23.85
	15	1717.5	132047	1	74	5	1726.8	132140	1	0	23.76
	10	1715.0	132022	1	49	10	1724.9	132121	1	0	23.62
Mid	5	1752.6	132398	1	24	5	1757.4	132446	1	0	23.66
	5	1750.3	132375	1	24	10	1757.5	132447	1	0	23.61
	10	1752.5	132397	1	49	5	1759.7	132469	1	0	23.59
	5	1748.1	132353	1	24	15	1757.4	132446	1	0	23.76
	15	1752.6	132398	1	74	5	1761.9	132491	1	0	23.56
	10	1750.1	132373	1	49	10	1760.0	132472	1	0	23.57
High	5	1772.7	132599	1	24	5	1777.5	132647	1	0	23.61
	5	1767.8	132550	1	24	10	1775.0	132622	1	0	23.74
	10	1770.0	132572	1	49	5	1777.2	132644	1	0	23.66
	5	1763.2	132504	1	24	15	1772.5	132597	1	0	23.65
	15	1767.7	132549	1	74	5	1777.0	132642	1	0	23.60
	10	1765.1	132523	1	49	10	1775.0	132622	1	0	23.48

Note:

Modulation : QPSK(1RB)

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	1712.5	131997	25	0	5	1717.3	132045	25	0	21.92
	5	1712.8	132000	25	0	10	1720.0	132072	50	0	21.93
	10	1715.0	132022	50	0	5	1722.2	132094	25	0	21.91
	5	1713.0	132002	25	0	15	1722.3	132095	75	0	21.87
	15	1717.5	132047	75	0	5	1726.8	132140	25	0	21.89
	10	1715.0	132022	50	0	10	1724.9	132121	50	0	21.96
Mid	5	1752.6	132398	25	0	5	1757.4	132446	25	0	21.90
	5	1750.3	132375	25	0	10	1757.5	132447	50	0	21.90
	10	1752.5	132397	50	0	5	1759.7	132469	25	0	21.91
	5	1748.1	132353	25	0	15	1757.4	132446	75	0	21.91
	15	1752.6	132398	75	0	5	1761.9	132491	25	0	21.91
	10	1750.1	132373	50	0	10	1760.0	132472	50	0	21.92
High	5	1772.7	132599	25	0	5	1777.5	132647	25	0	22.00
	5	1767.8	132550	25	0	10	1775.0	132622	50	0	21.92
	10	1770.0	132572	50	0	5	1777.2	132644	25	0	21.84
	5	1763.2	132504	25	0	15	1772.5	132597	75	0	21.90
	15	1767.7	132549	75	0	5	1777.0	132642	25	0	21.96
	10	1765.1	132523	50	0	10	1775.0	132622	50	0	21.88

Note:

Modulation : QPSK(Full RB)

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	1713.0	132002	1	24	15	1722.3	132095	1	0	23.30
Mid	5	1748.1	132353	1	24	15	1757.4	132446	1	0	23.14
High	5	1767.8	132550	1	24	10	1775.0	132622	1	0	23.08
Low	10	1715.0	132022	50	0	10	1724.9	132121	50	0	20.97
Mid	10	1750.1	132373	50	0	10	1760.0	132472	50	0	20.94
High	5	1772.7	132599	25	0	5	1777.5	132647	25	0	21.02

Note:

Modulation : 16QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	1713.0	132002	1	24	15	1722.3	132095	1	0	22.28
Mid	5	1748.1	132353	1	24	15	1757.4	132446	1	0	22.23
High	5	1767.8	132550	1	24	10	1775.0	132622	1	0	20.33
Low	10	1715.0	132022	50	0	10	1724.9	132121	50	0	20.96
Mid	10	1750.1	132373	50	0	10	1760.0	132472	50	0	20.90
High	5	1772.7	132599	25	0	5	1777.5	132647	25	0	20.96

Note:

Modulation : 64QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	1713.0	132002	1	24	15	1722.3	132095	1	0	19.25
Mid	5	1748.1	132353	1	24	15	1757.4	132446	1	0	19.18
High	5	1767.8	132550	1	24	10	1775.0	132622	1	0	19.12
Low	10	1715.0	132022	50	0	10	1724.9	132121	50	0	18.98
Mid	10	1750.1	132373	50	0	10	1760.0	132472	50	0	18.97
High	5	1772.7	132599	25	0	5	1777.5	132647	25	0	18.94

Note:

Modulation : 256QAM

9.2 Equivalent Isotropic Radiated Power

	PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
	BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
Low	5	131997	1/24	5	132045	1/0	-19.30	14.32	9.98	2.23	H	0.161	22.06
	5	132000	1/24	10	132072	1/0	-19.25	14.37	9.98	2.23	H	0.163	22.11
	10	132022	1/49	5	132094	1/0	-19.33	14.18	10.01	2.22	H	0.157	21.97
	5	132002	1/24	15	132095	1/0	-19.28	14.23	10.01	2.22	H	0.159	22.02
	15	132047	1/74	5	132140	1/0	-19.05	14.46	10.01	2.22	H	0.168	22.25
	10	132022	1/49	10	132121	1/0	-19.20	14.31	10.01	2.22	H	0.162	22.10
Mid	5	132398	1/24	5	132446	1/0	-20.30	13.38	10.18	2.17	H	0.138	21.39
	5	132375	1/24	10	132447	1/0	-20.10	13.58	10.18	2.17	H	0.144	21.59
	10	132397	1/49	5	132469	1/0	-20.23	13.45	10.18	2.17	H	0.140	21.46
	5	132353	1/24	15	132446	1/0	-19.91	13.80	10.17	2.15	H	0.152	21.82
	15	132398	1/74	5	132491	1/0	-20.23	13.42	10.19	2.18	H	0.139	21.43
	10	132373	1/49	10	132472	1/0	-20.28	13.40	10.18	2.17	H	0.138	21.41
High	5	132599	1/24	5	132647	1/0	-20.90	12.75	10.21	2.25	H	0.118	20.71
	5	132550	1/24	10	132622	1/0	-21.53	12.08	10.20	2.23	H	0.101	20.05
	10	132572	1/49	5	132644	1/0	-21.00	12.65	10.21	2.25	H	0.115	20.61
	5	132504	1/24	15	132597	1/0	-20.53	13.08	10.20	2.23	H	0.127	21.05
	15	132549	1/74	5	132642	1/0	-21.97	11.64	10.20	2.23	H	0.091	19.61
	10	132523	1/49	10	132622	1/0	-21.55	12.06	10.20	2.23	H	0.101	20.03

Note:

1. Modulation : QPSK
2. Limit : < 1 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
5	131997	1/24	5	132045	1/0	-19.71	13.91	9.98	2.23	H	0.146	21.65
5	132000	1/24	10	132072	1/0	-19.74	13.88	9.98	2.23	H	0.145	21.62
10	132022	1/49	5	132094	1/0	-19.68	13.83	10.01	2.22	H	0.145	21.62
5	132002	1/24	15	132095	1/0	-19.71	13.80	10.01	2.22	H	0.144	21.59
15	132047	1/74	5	132140	1/0	-19.61	13.90	10.01	2.22	H	0.148	21.69
10	132022	1/49	10	132121	1/0	-19.67	13.84	10.01	2.22	H	0.146	21.63
5	132353	1/24	15	132446	1/0	-20.40	13.31	10.17	2.15	H	0.136	21.33
5	132504	1/24	15	132597	1/0	-20.95	12.66	10.20	2.23	H	0.116	20.63

Note:

1. Modulation : 16QAM
2. Limit : < 1 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
5	131997	1/24	5	132045	1/0	-20.51	13.11	9.98	2.23	H	0.122	20.85
5	132000	1/24	10	132072	1/0	-20.55	13.07	9.98	2.23	H	0.121	20.81
10	132022	1/49	5	132094	1/0	-20.51	13.00	10.01	2.22	H	0.120	20.79
5	132002	1/24	15	132095	1/0	-20.56	12.95	10.01	2.22	H	0.119	20.74
15	132047	1/74	5	132140	1/0	-20.65	12.86	10.01	2.22	H	0.116	20.65
10	132022	1/49	10	132121	1/0	-20.52	12.99	10.01	2.22	H	0.120	20.78
5	132353	1/24	15	132446	1/0	-21.30	12.41	10.17	2.15	H	0.110	20.43
5	132504	1/24	15	132597	1/0	-23.72	9.89	10.20	2.23	H	0.061	17.86

Note:

1. Modulation : 64QAM
2. Limit : < 1 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
5	131997	1/24	5	132045	1/0	-23.64	9.98	9.98	2.23	H	0.059	17.72
5	132000	1/24	10	132072	1/0	-23.66	9.96	9.98	2.23	H	0.059	17.70
10	132022	1/49	5	132094	1/0	-23.55	9.96	10.01	2.22	H	0.060	17.75
5	132002	1/24	15	132095	1/0	-23.65	9.86	10.01	2.22	H	0.058	17.65
15	132047	1/74	5	132140	1/0	-23.75	9.76	10.01	2.22	H	0.057	17.55
10	132022	1/49	10	132121	1/0	-23.55	9.96	10.01	2.22	H	0.060	17.75
5	132353	1/24	15	132446	1/0	-24.56	9.15	10.17	2.15	H	0.052	17.17
5	132504	1/24	15	132597	1/0	-24.99	8.62	10.20	2.23	H	0.046	16.59

Note:

1. Modulation : 256QAM
2. Limit : < 1 Watts

9.3 Conducted Spurious Emissions

Operating frequency	PCC				SCC				Measurement	Factor (dB)	Measurement	Result (dBm)
	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset	Maximum Frequency (GHz)		Maximum Data (dBm)	
Low	5	132002	1713.0	1/24	15	132095	1722.3	1/0	8.8510	28.591	-76.58	-47.99
Mid	5	132353	1748.1	1/24	15	132446	1757.4	1/0	8.3041	28.591	-75.85	-47.26
High	5	132550	1767.8	1/24	10	132622	1775.0	1/0	8.0130	28.591	-76.33	-47.74
Low	5	132002	1713.0	1/0	15	132095	1722.3	1/74	9.1172	28.591	-76.32	-47.73
Mid	5	132353	1748.1	1/0	15	132446	1757.4	1/74	8.8844	28.591	-77.15	-48.56
High	5	132550	1767.8	1/0	10	132622	1775.0	1/49	8.0244	28.591	-76.35	-47.76
Low	10	132022	1715.0	50/0	10	132121	1724.9	50/0	3.7568	27.976	-75.53	-47.55
Mid	10	132373	1750.1	50/0	10	132472	1760.0	50/0	9.9531	28.591	-76.47	-47.88
High	5	132599	1772.7	25/0	5	132647	1777.5	50/0	8.6246	28.591	-76.69	-48.10
Low	10	132523	1765.1	50/0	10	132622	1775.0	50/0	4.0474	27.976	-76.82	-48.85

Note:


1. Modulation : QPSK
2. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter
3. Factors for frequency :

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


4. Limit : -13.0 dBm

Frequency Range : 30 MHz ~ 10 GHz


PCC 5 MHz Ch132002 RB1 Offset0 SCC 15 MHz Ch132095 RB1 Offset74

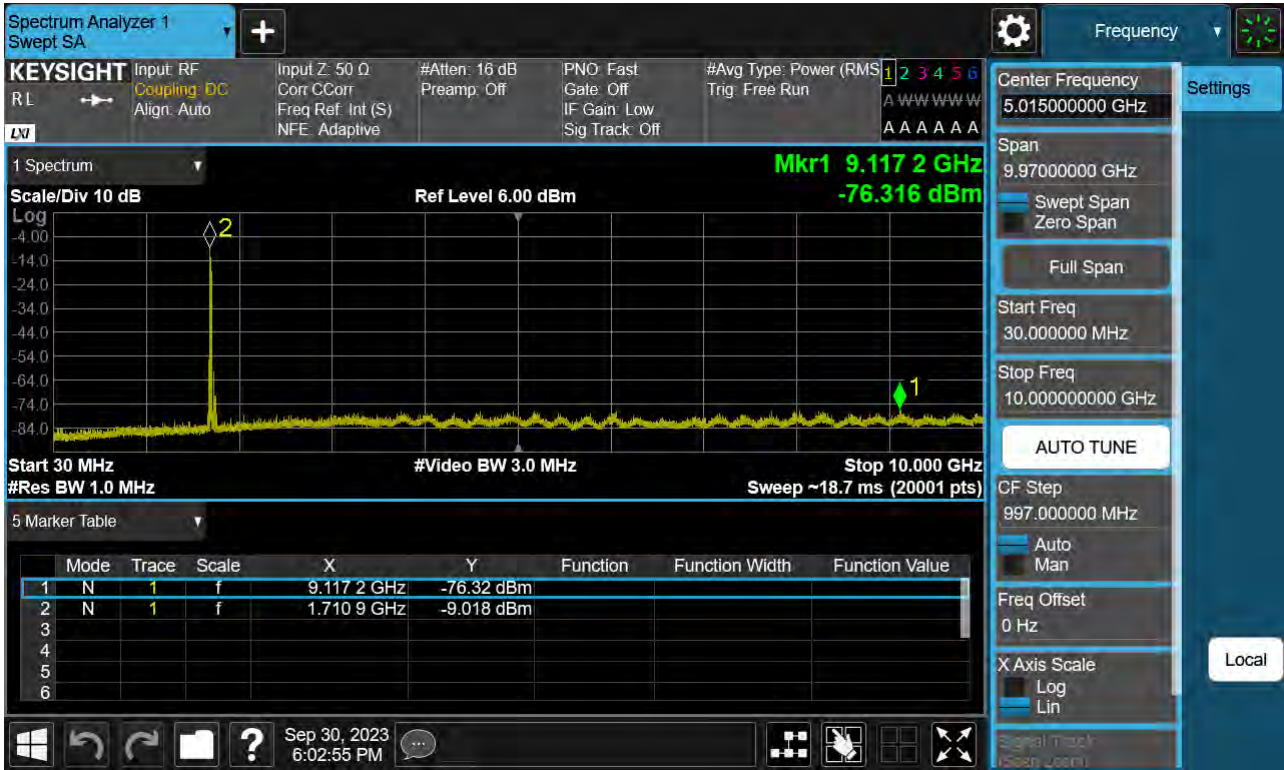


PCC 5 MHz Ch132002 RB1 Offset24 SCC 15 MHz Ch132095 RB1 Offset0

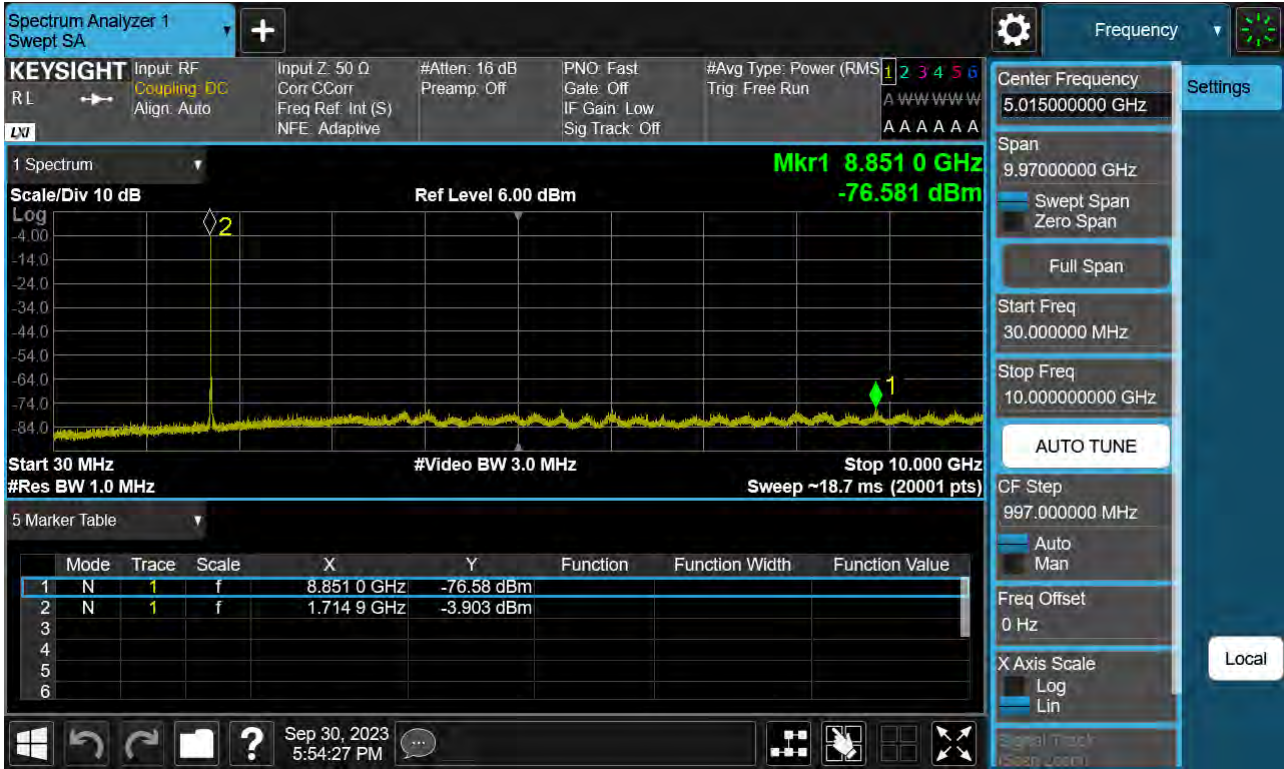


PCC 5 MHz Ch132353 RB1 Offset0 SCC 15 MHz Ch132446 RB1 Offset74

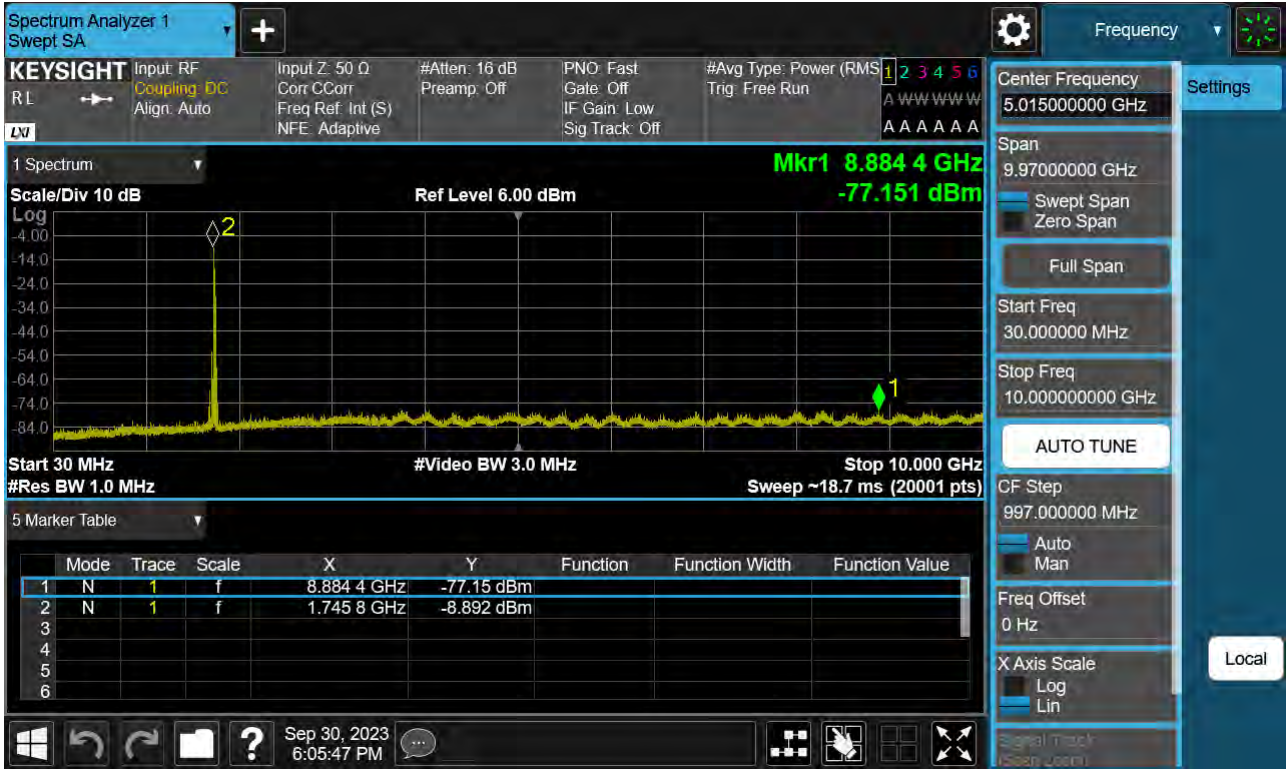


PCC 5 MHz Ch132353 RB1 Offset24 SCC 15 MHz Ch132446 RB1 Offset0

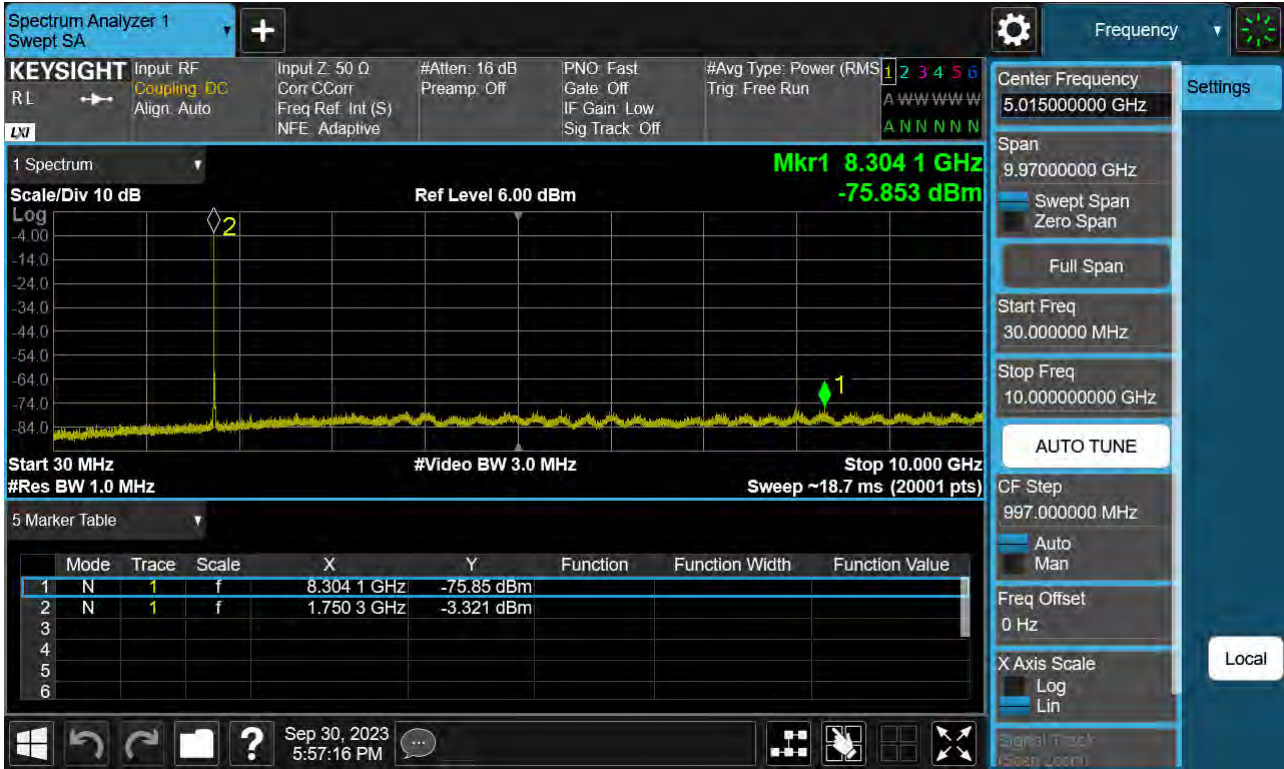


PCC 5 MHz Ch132550 RB1 Offset0 SCC 10 MHz Ch132622 RB1 Offset49

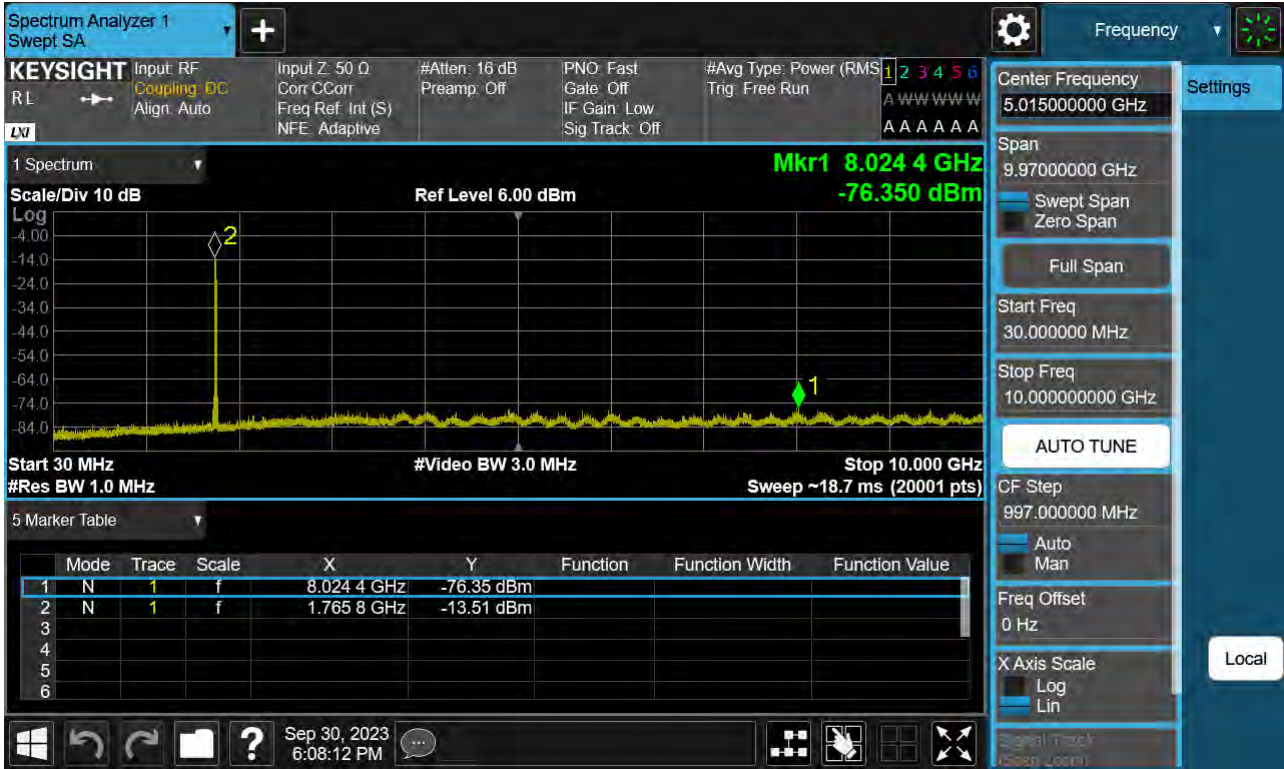

PCC 5 MHz Ch132550 RB1 Offset24 SCC 10 MHz Ch132622 RB1 Offset0

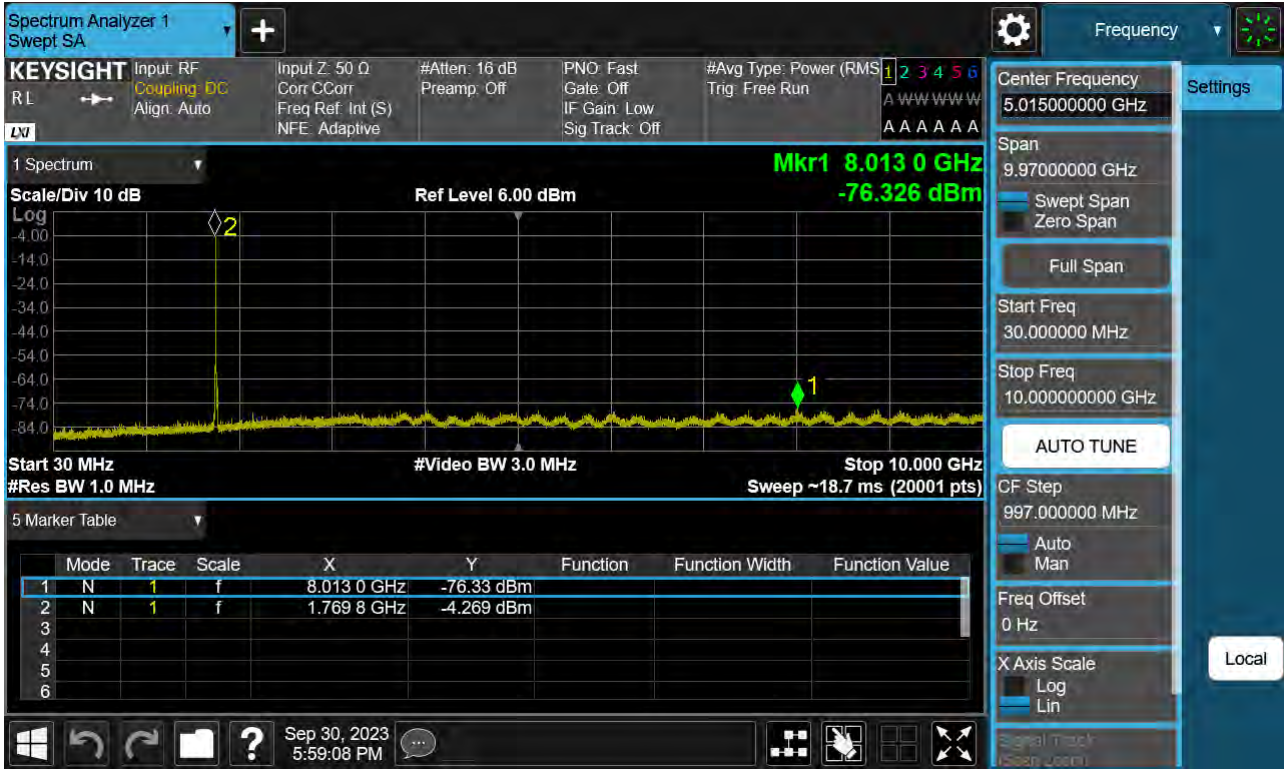


PCC 5 MHz Ch132599 RB25 Offset0 SCC 5 MHz Ch132647 RB25 Offset0

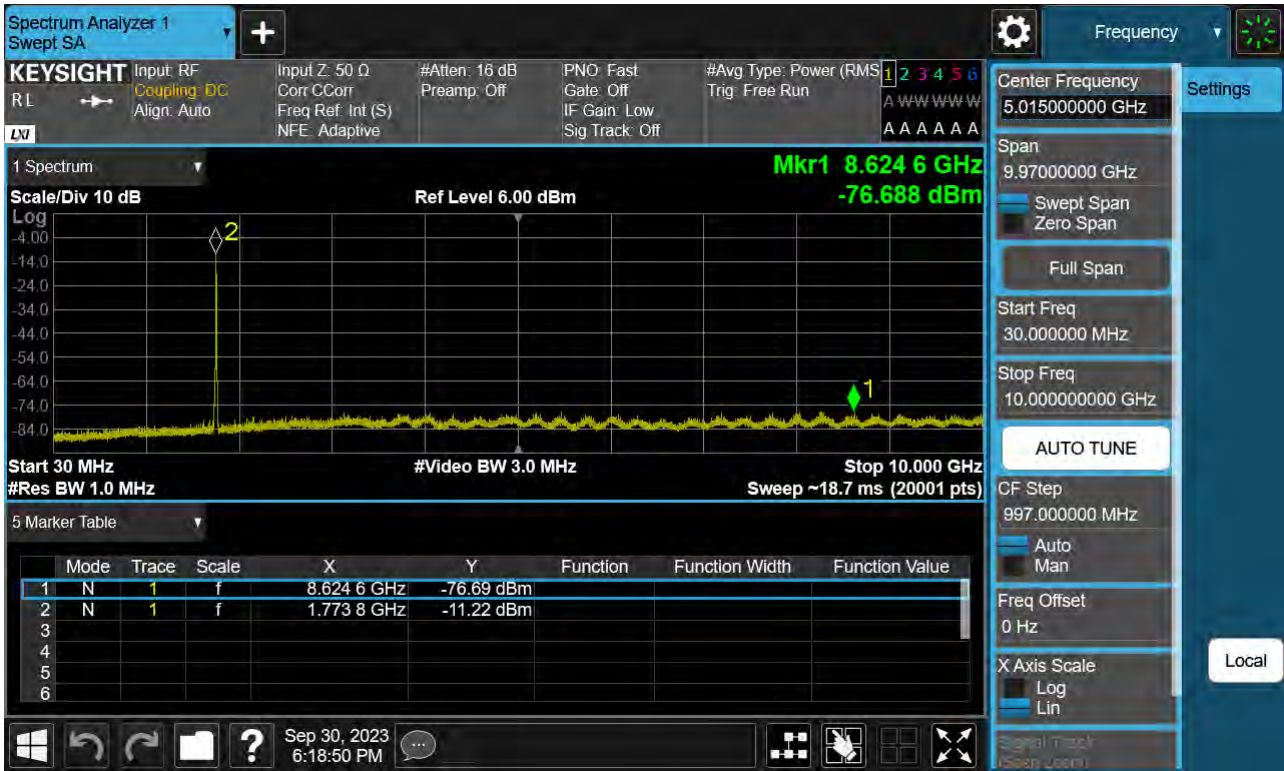


PCC 10 MHz Ch132022 RB50 Offset0 SCC 10 MHz Ch132121 RB50 Offset0



PCC 10 MHz Ch132373 RB50 Offset0 SCC 10 MHz Ch132472 RB50 Offset0

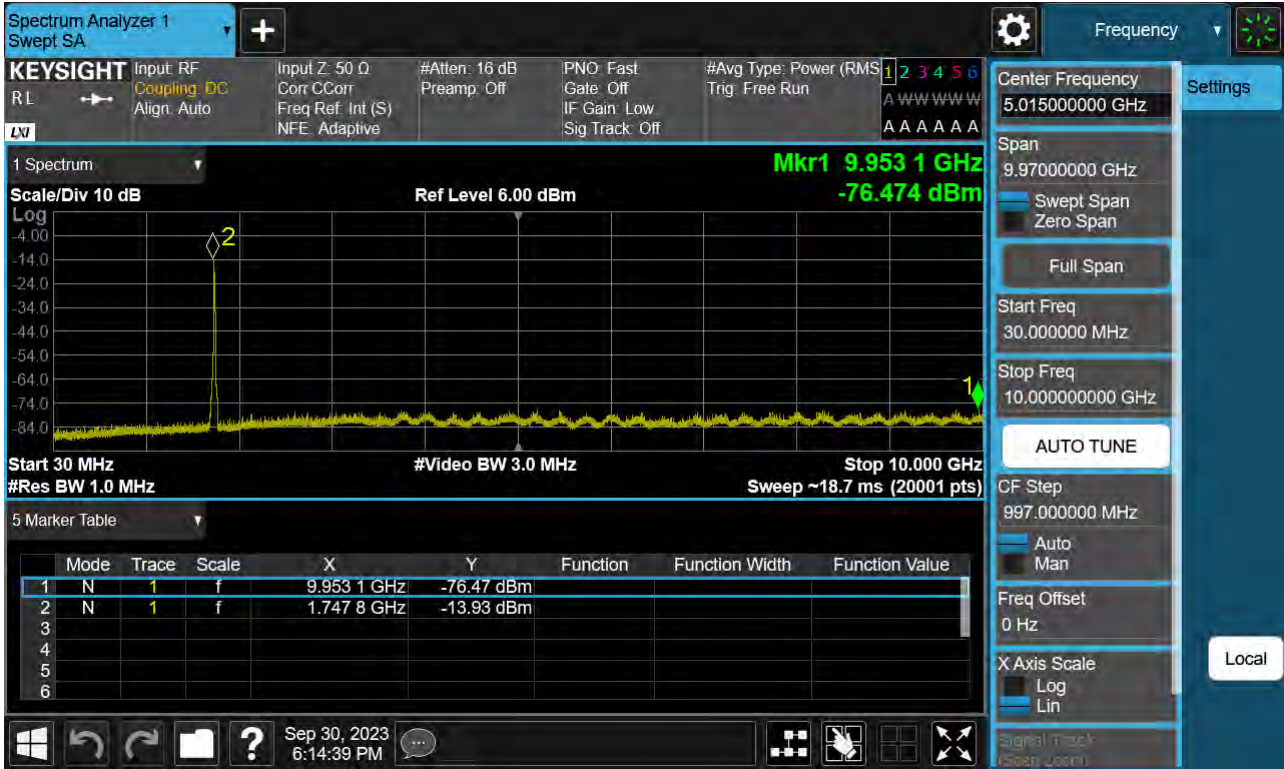


PCC 10 MHz Ch132523 RB50 Offset0 SCC 10 MHz Ch132622 RB50 Offset0

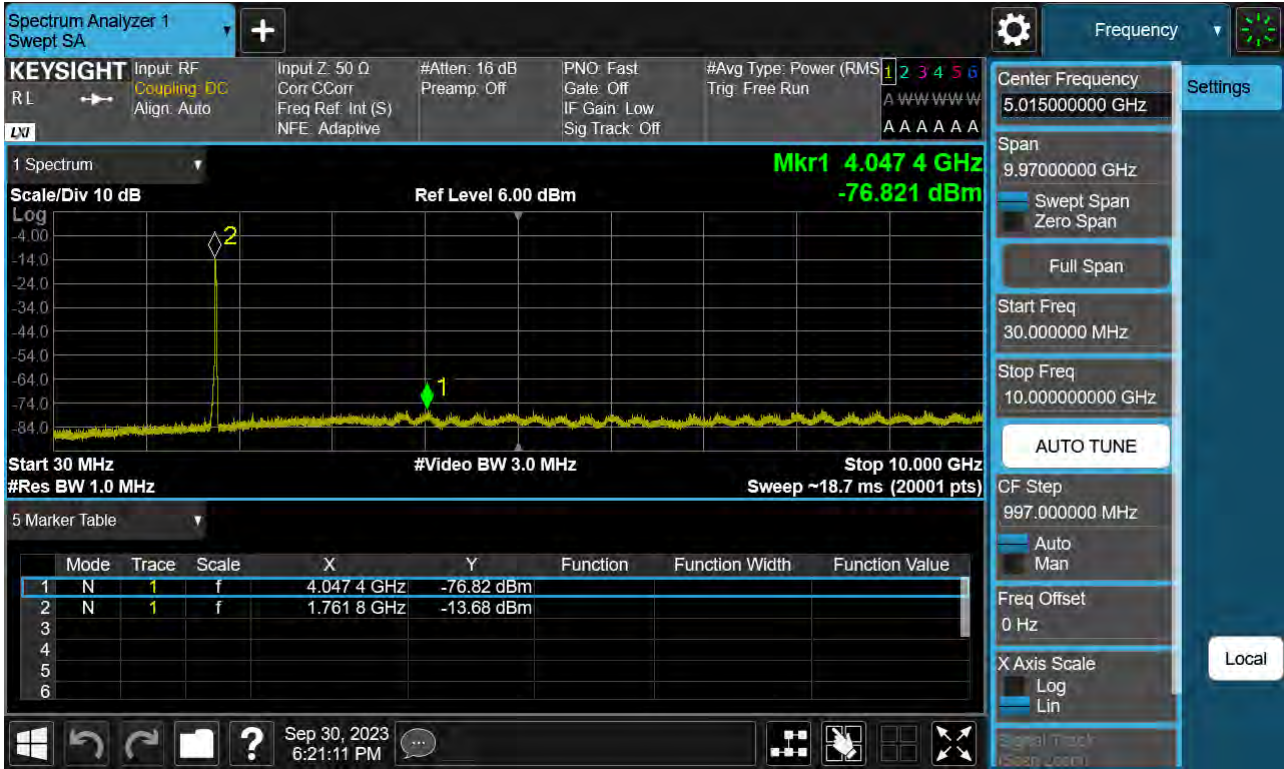


Frequency Range : 10 GHz ~ 20 GHz

PCC 5 MHz Ch132002 RB1 Offset0, SCC 15 MHz Ch132095 RB1 Offset74

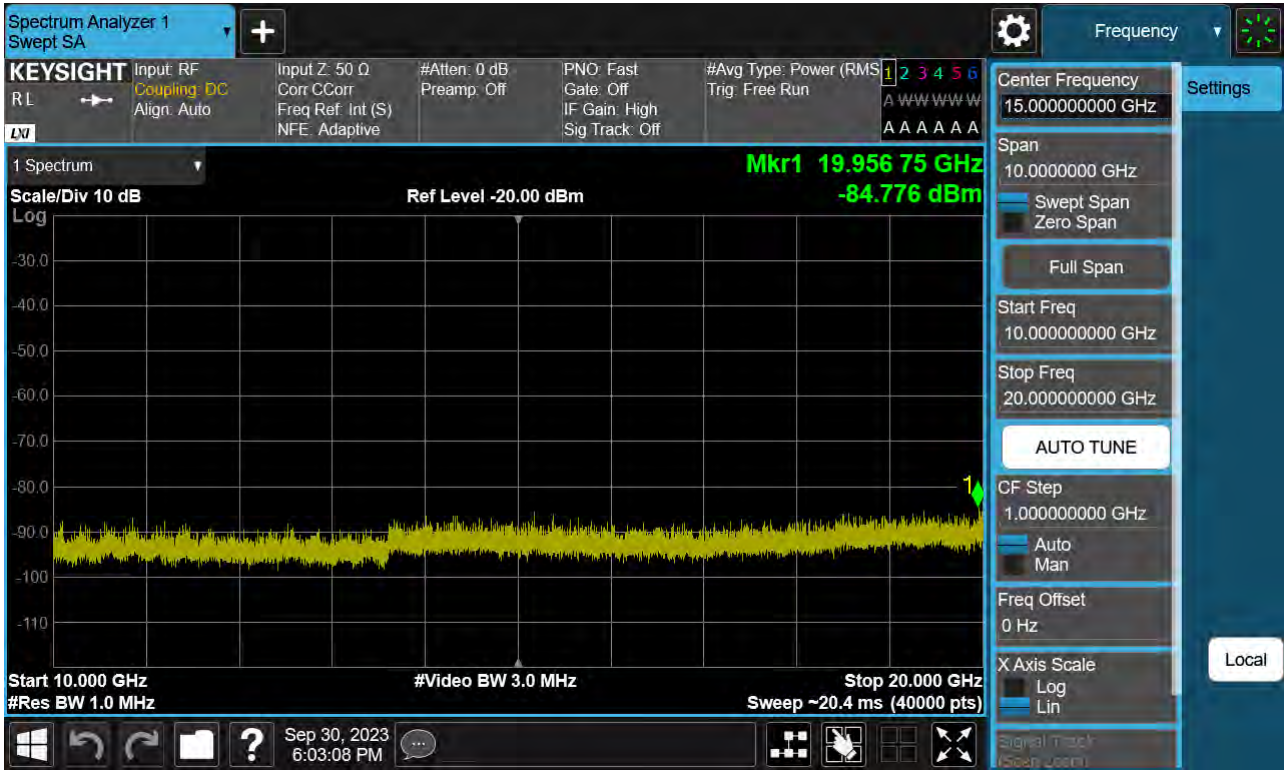


PCC 5 MHz Ch132002 RB1 Offset24, SCC 15 MHz Ch132095 RB1 Offset0

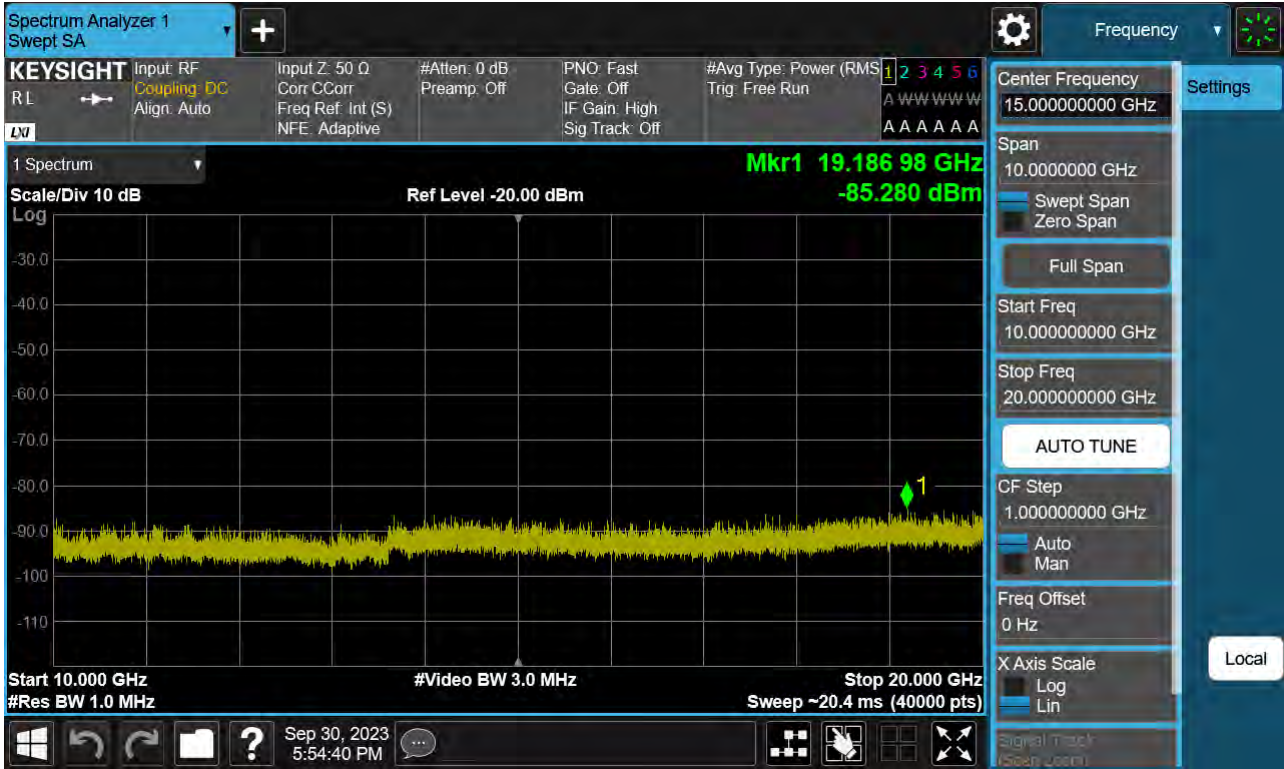


PCC 5 MHz Ch132353 RB1 Offset0, SCC 15 MHz Ch132446 RB1 Offset74




PCC 5 MHz Ch132353 RB1 Offset24, SCC 15 MHz Ch132446 RB1 Offset0

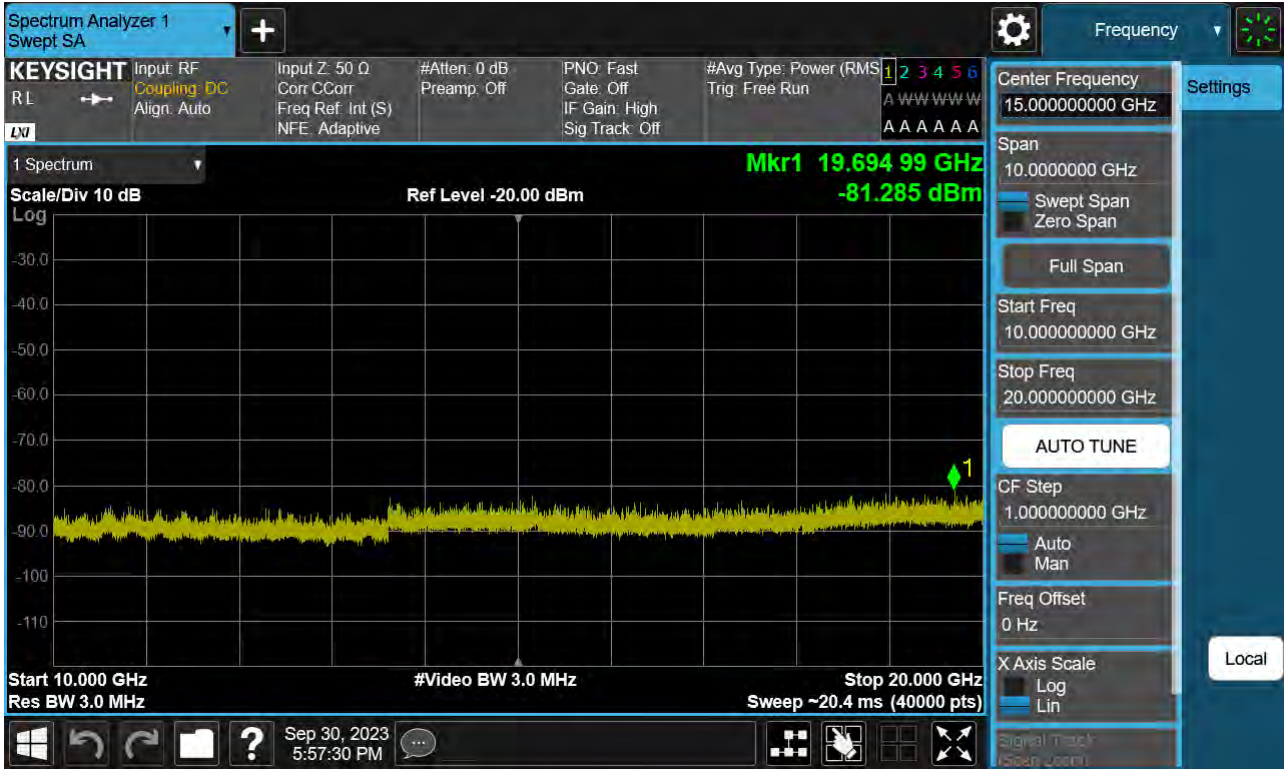


PCC 5 MHz Ch132550 RB1 Offset0, SCC 10 MHz Ch132622 RB1 Offset49

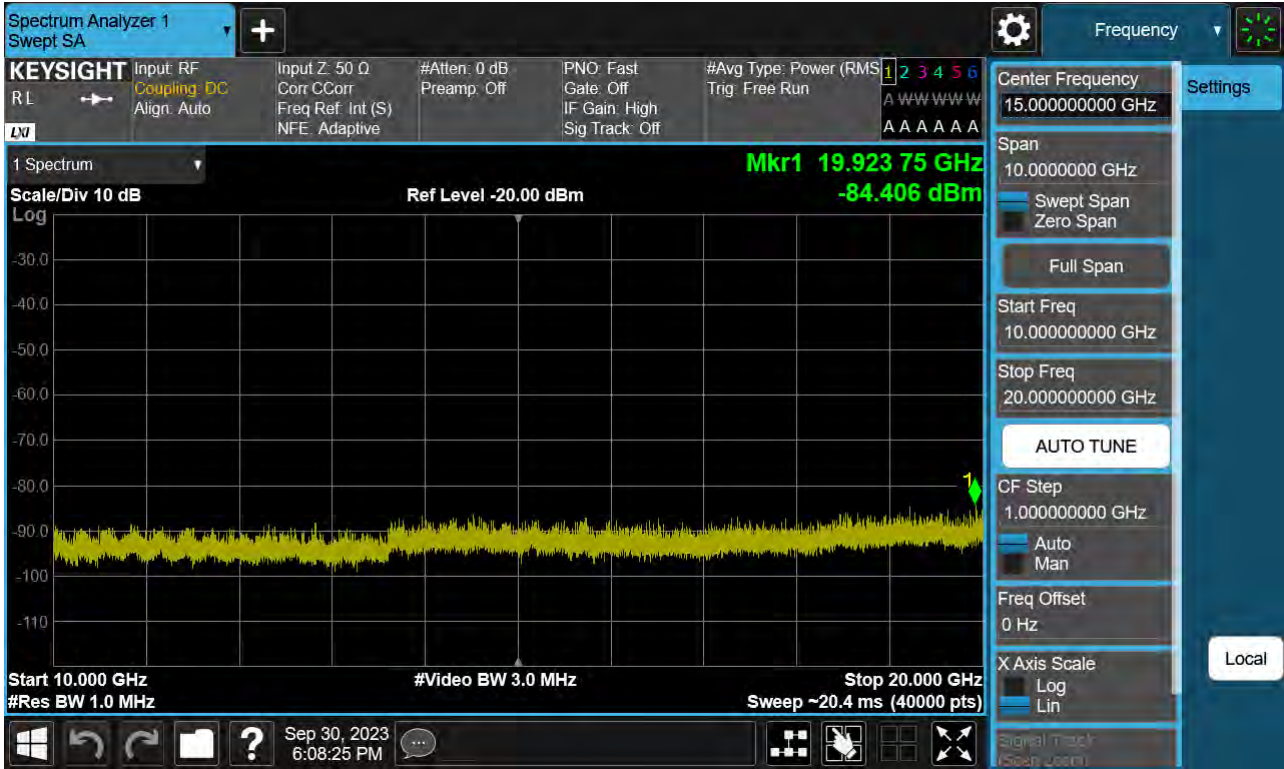

PCC 5 MHz Ch132550 RB1 Offset24, SCC 10 MHz Ch132622 RB1 Offset0

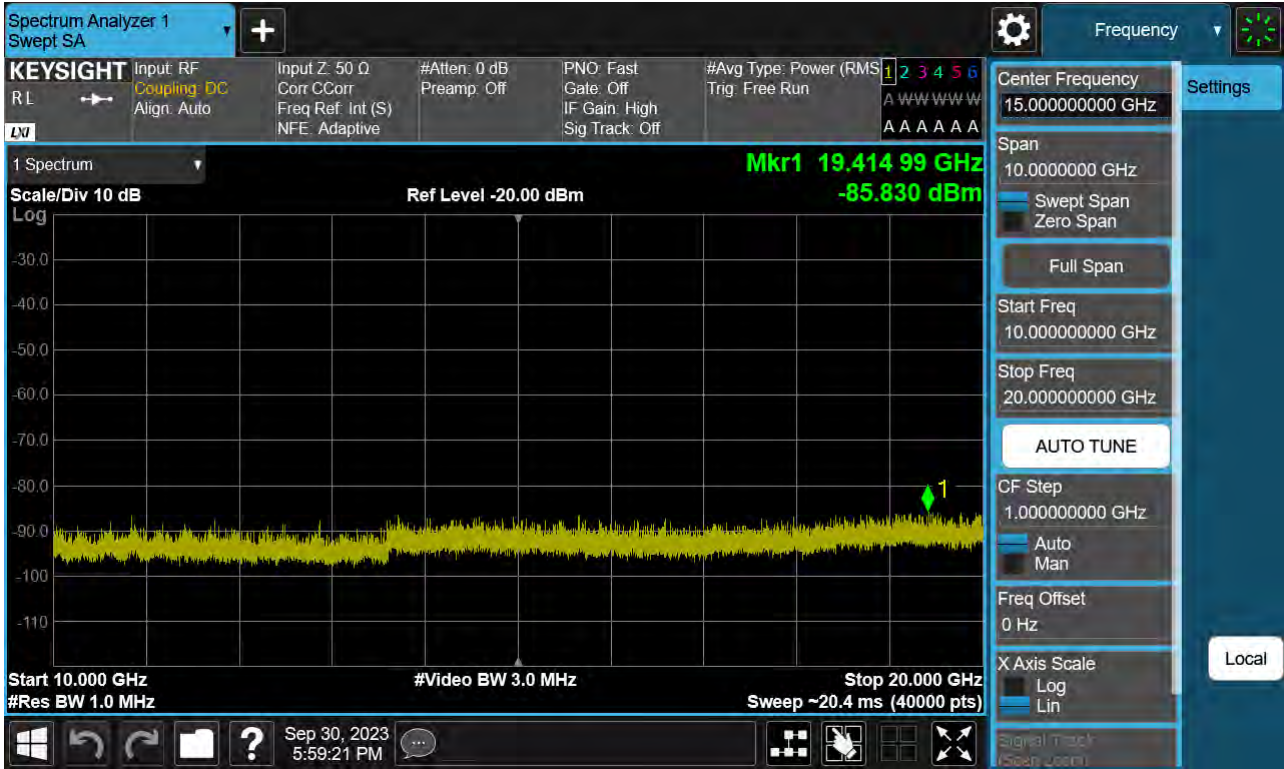

PCC 5 MHz Ch132599 RB25 Offset0, SCC 5 MHz Ch132647 RB25 Offset0

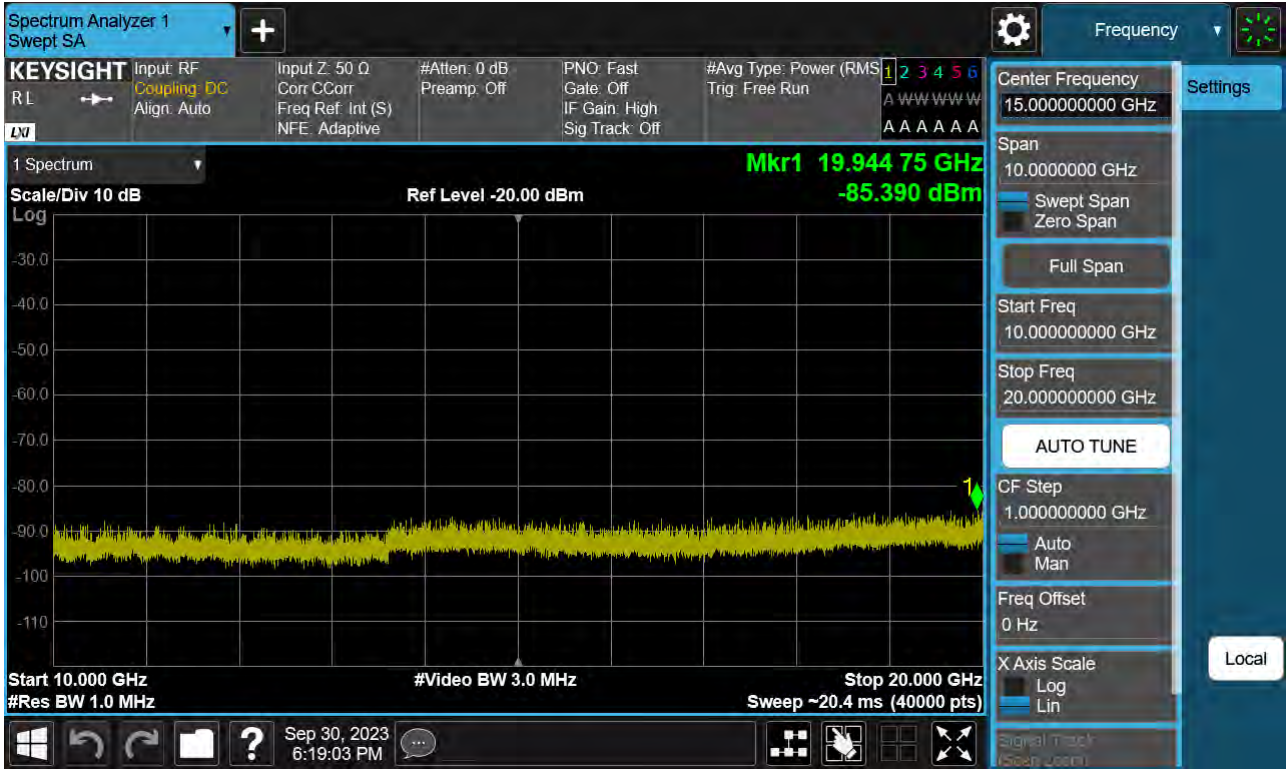


PCC 10 MHz Ch132022 RB50 Offset0, SCC 10 MHz Ch132121 RB50 Offset0



PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0




PCC 10 MHz Ch132523 RB50 Offset0, SCC 10 MHz Ch132622 RB50 Offset0

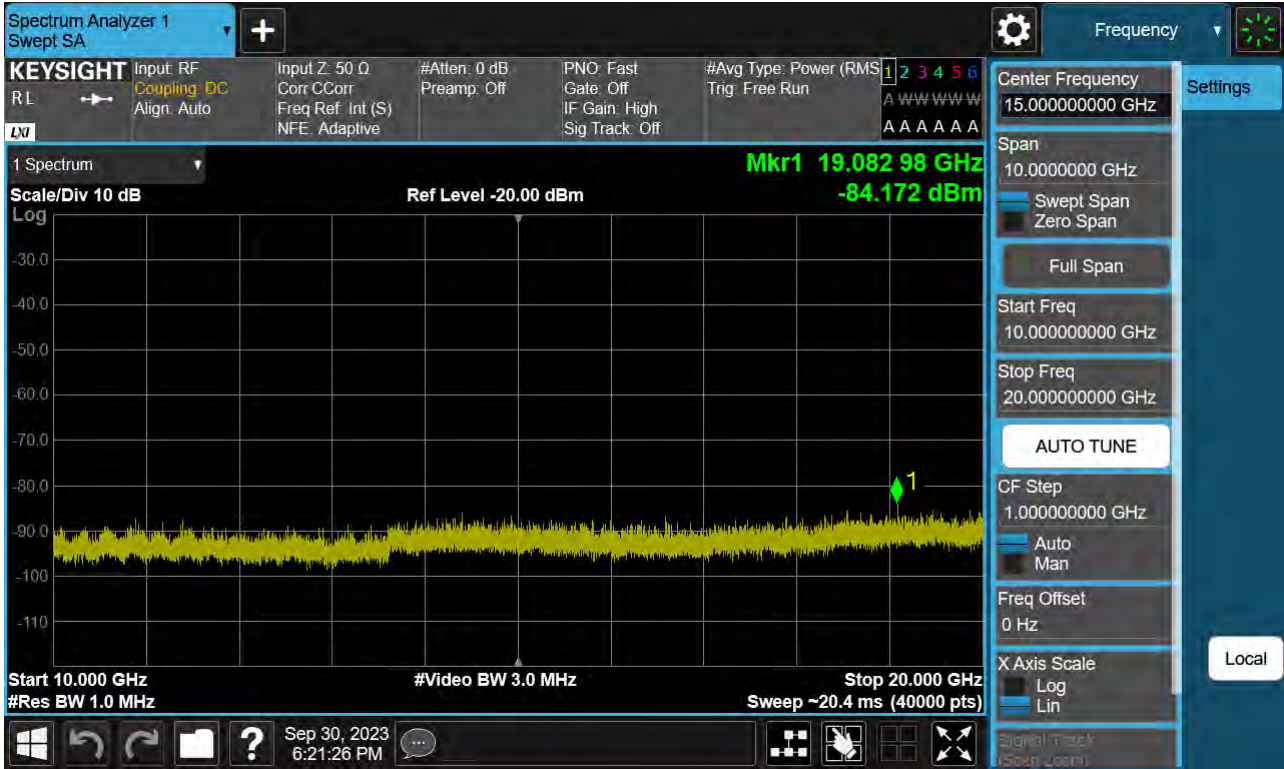


9.4 Channel Edge


Highest Channel_PCC 5 MHz Ch132550 RB1 Offset0 SCC 10 MHz Ch132622 RB1 Offset49(1)

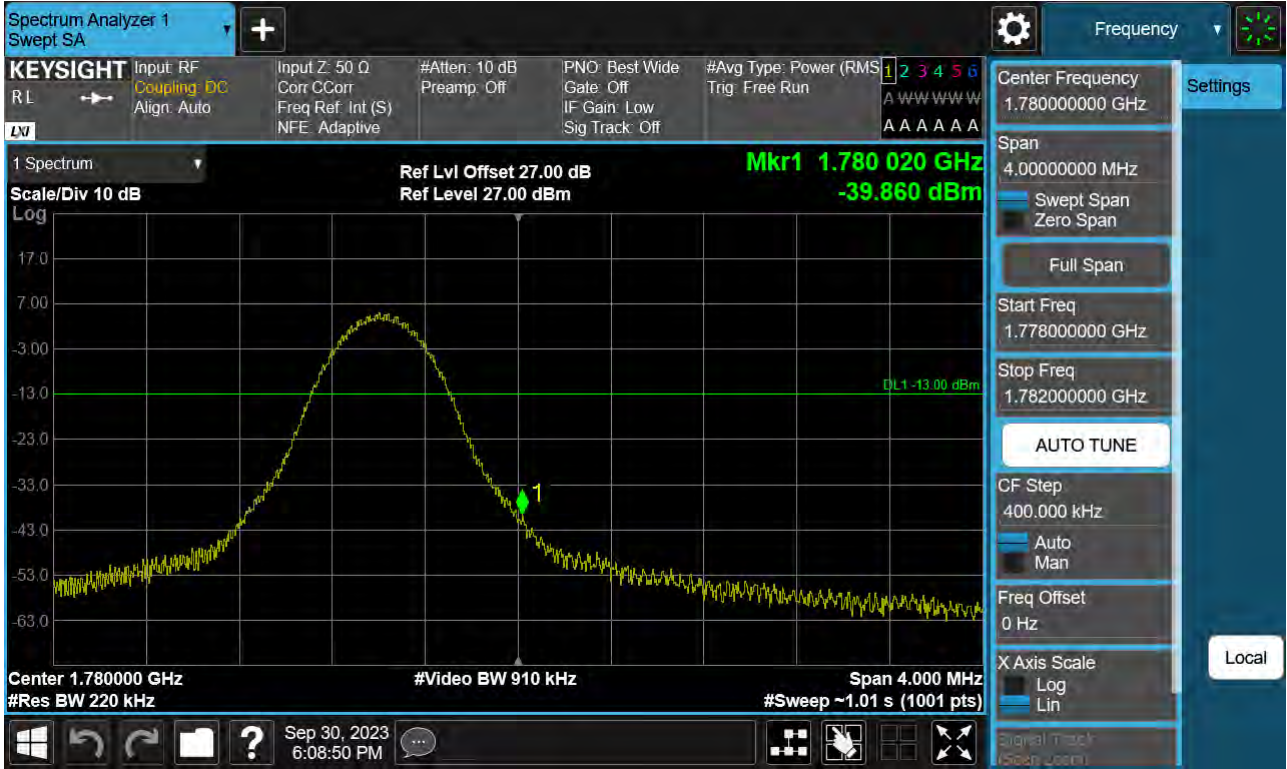


Highest Channel_PCC 5 MHz Ch132550 RB1 Offset0 SCC 10 MHz Ch132622 RB1 Offset49(2)

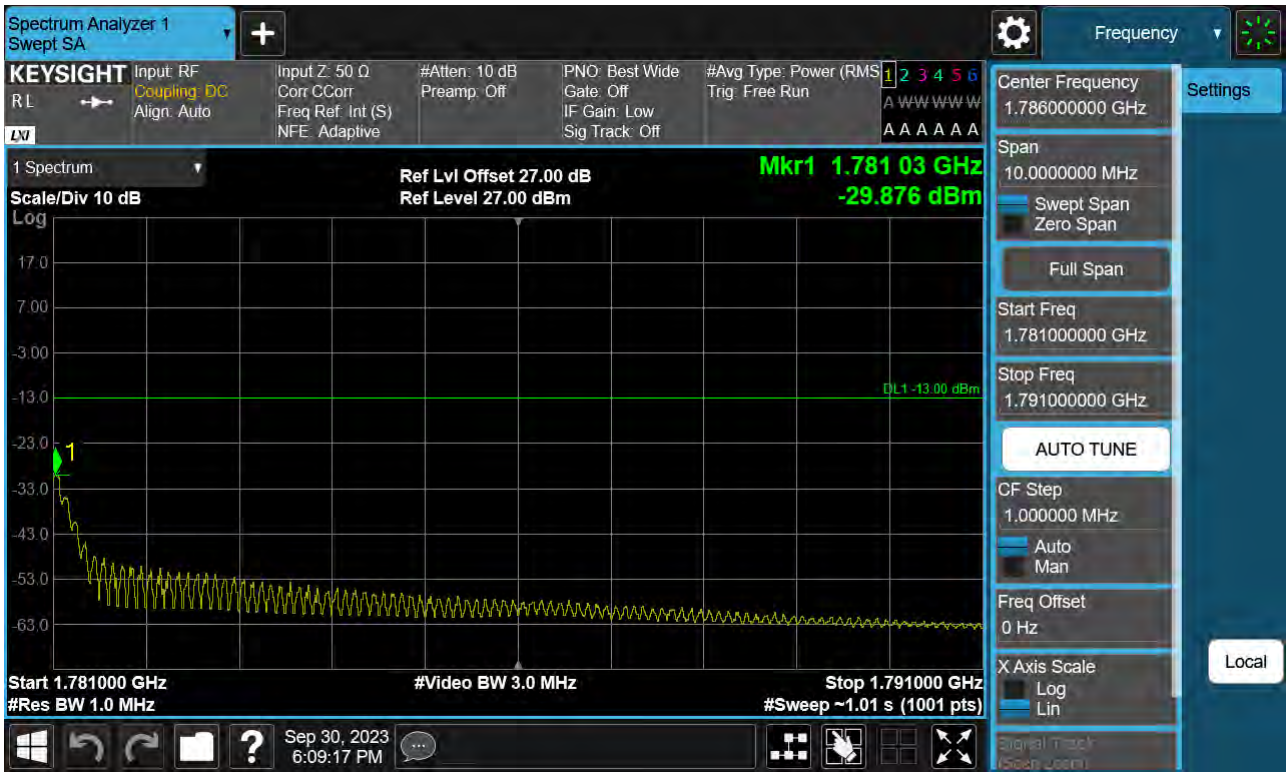

Highest Channel_PCC 5 MHz Ch132550 RB1 Offset24 SCC 10 MHz Ch132622 RB1 Offset0(1)

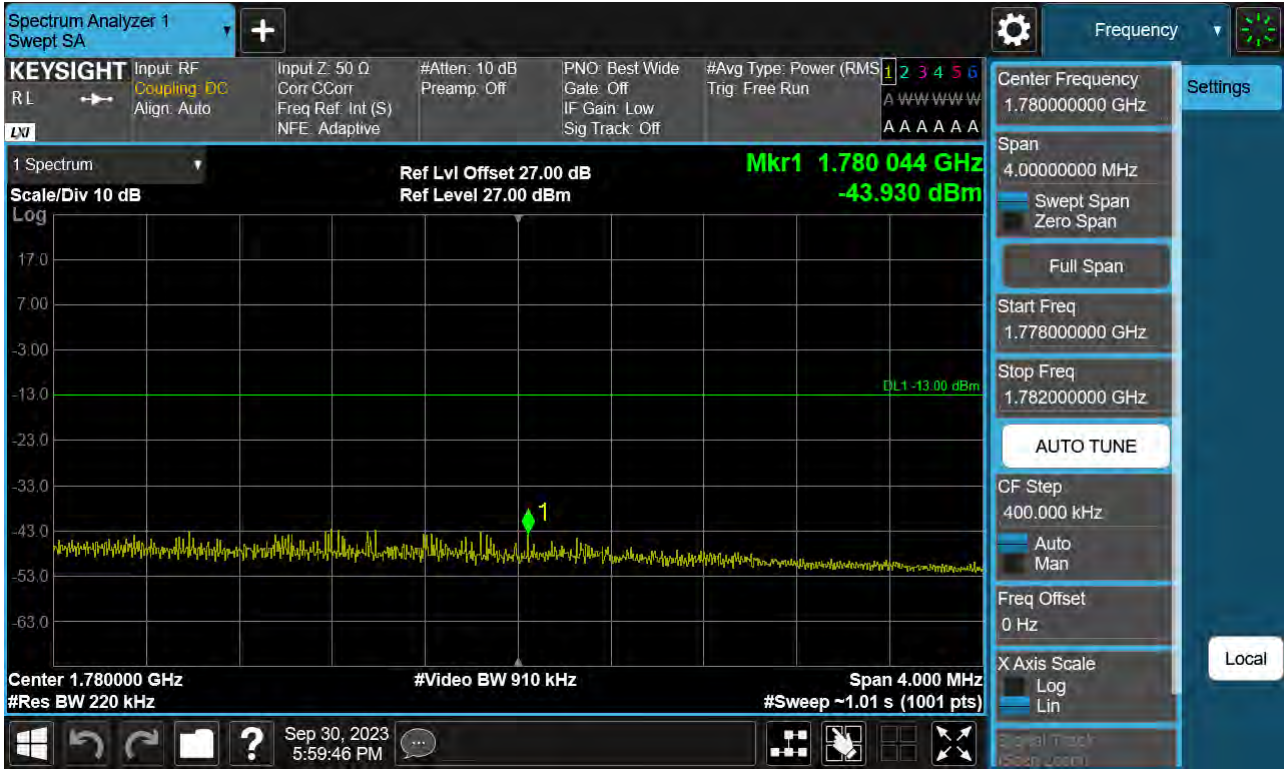


Highest Channel_PCC 5 MHz Ch132550 RB1 Offset24 SCC 10 MHz Ch132622 RB1 Offset0(2)

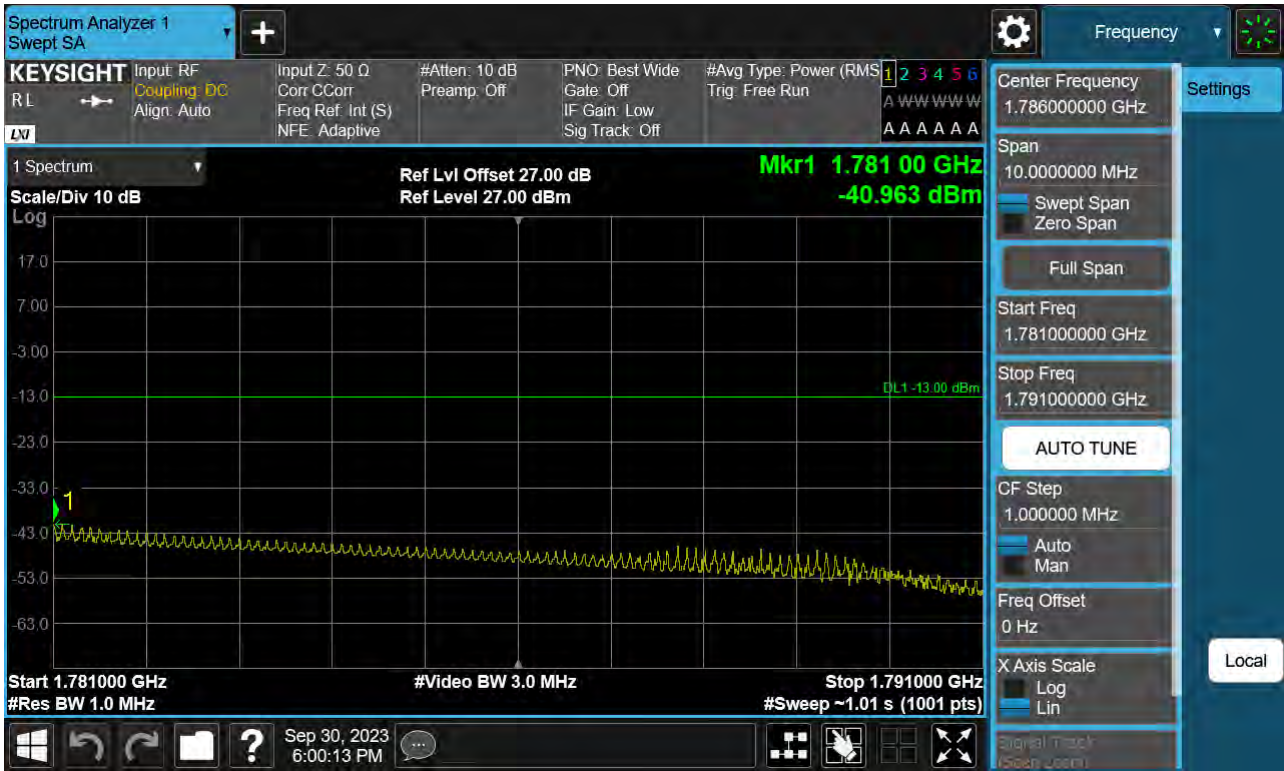


Highest Channel_PCC 5 MHz Ch132599 RB25 Offset0 SCC 5 MHz Ch132647 RB25 Offset0(1)




Highest Channel_PCC 5 MHz Ch132599 RB25 Offset0 SCC 5 MHz Ch132647 RB25 Offset0(2)

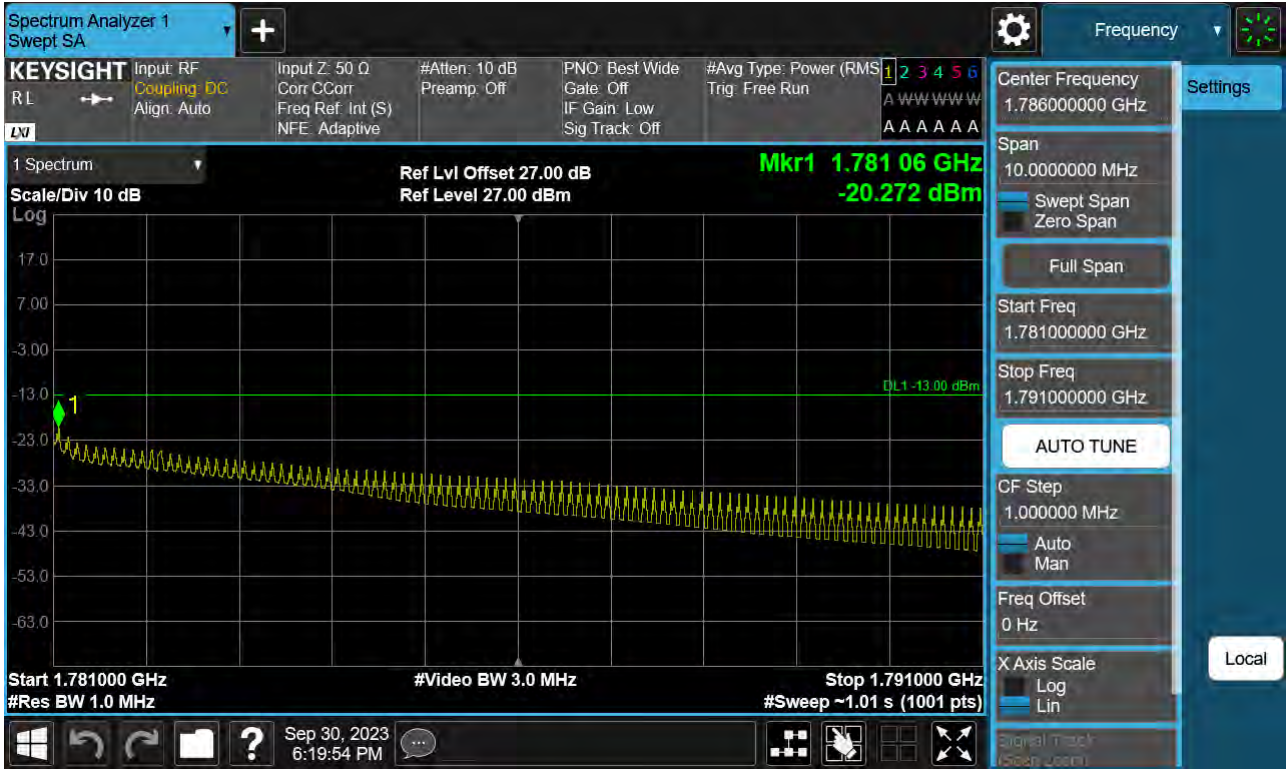


Lowest Channel_PCC 5 MHz Ch132002 RB1 Offset0 SCC 15 MHz Ch132095 RB1 Offset74(1)

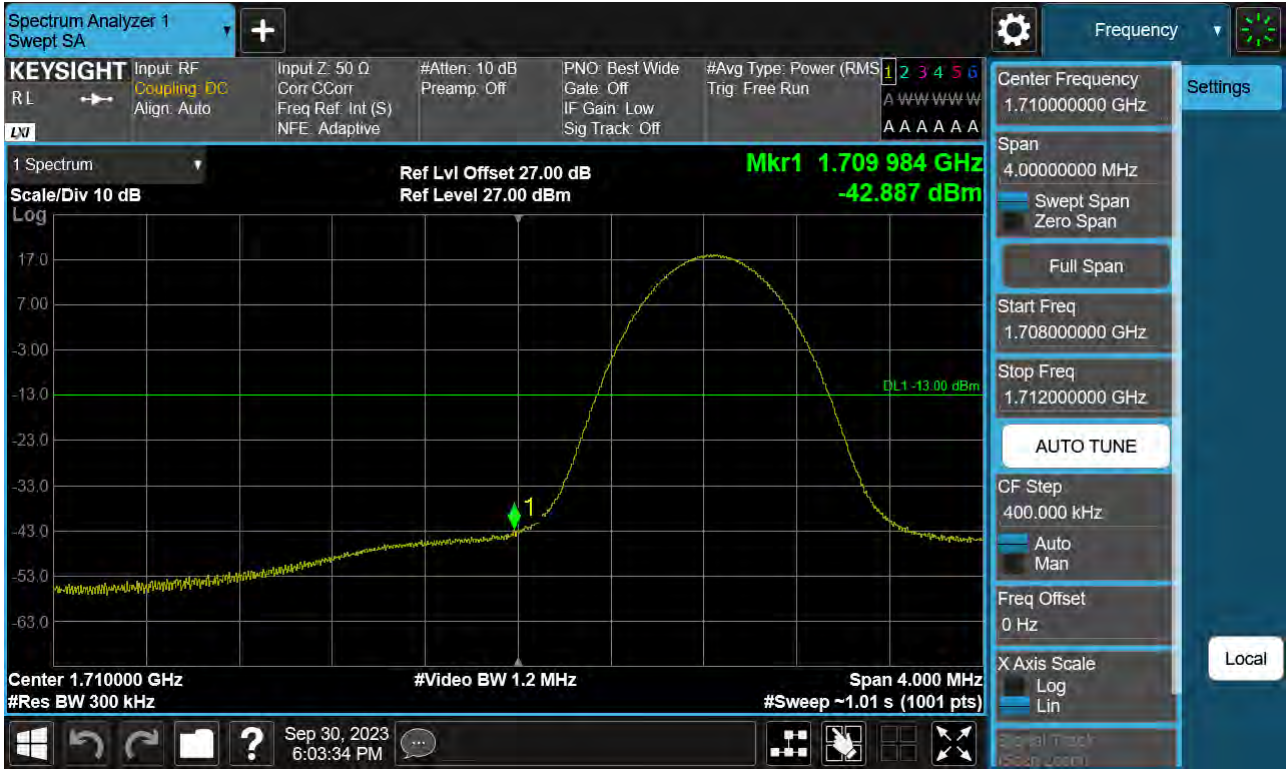

Lowest Channel_PCC 5 MHz Ch132002 RB1 Offset0 SCC 15 MHz Ch132095 RB1 Offset74(2)

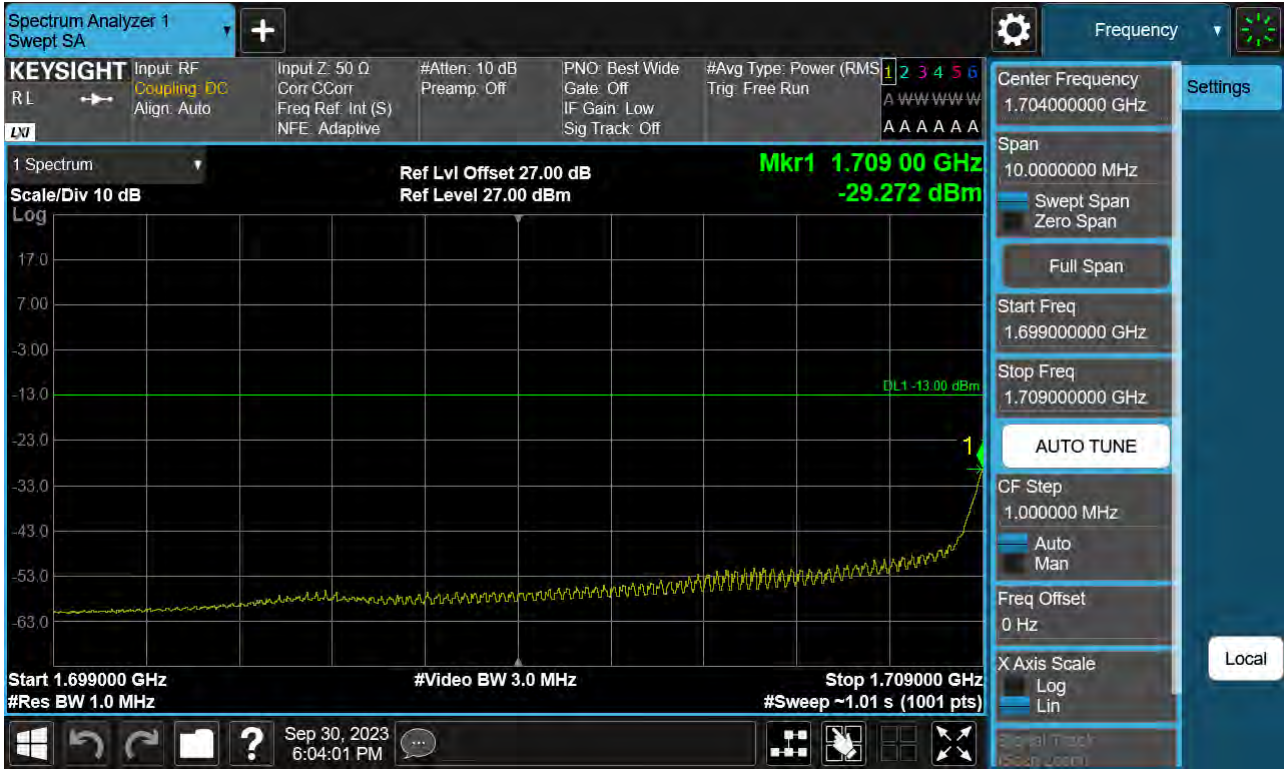


Lowest Channel_PCC 5 MHz Ch132002 RB1 Offset24 SCC 15 MHz Ch132095 RB1 Offset0(1)

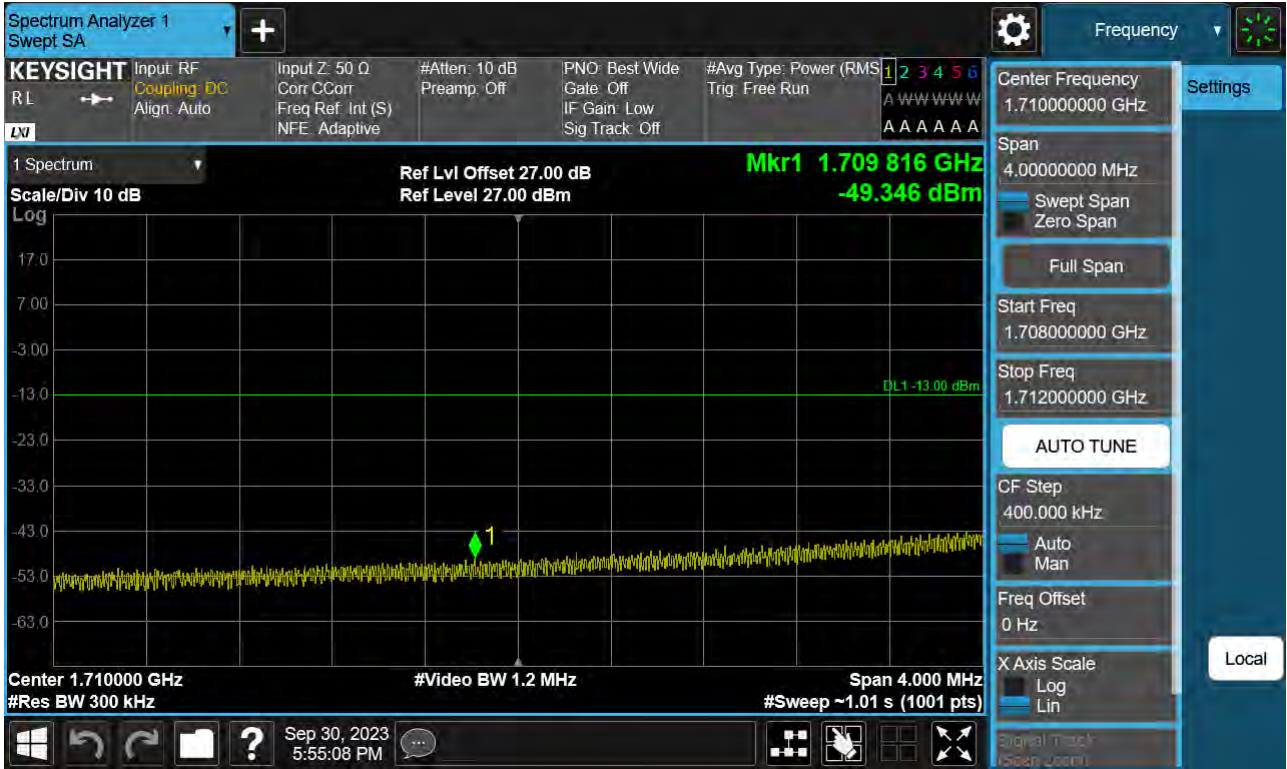

Lowest Channel_PCC 5 MHz Ch132002 RB1 Offset24 SCC 15 MHz Ch132095 RB1 Offset0(2)



Lowest Channel_PCC 10 MHz Ch132022 RB50 Offset0 SCC 10 MHz Ch132121 RB50 Offset0(1)

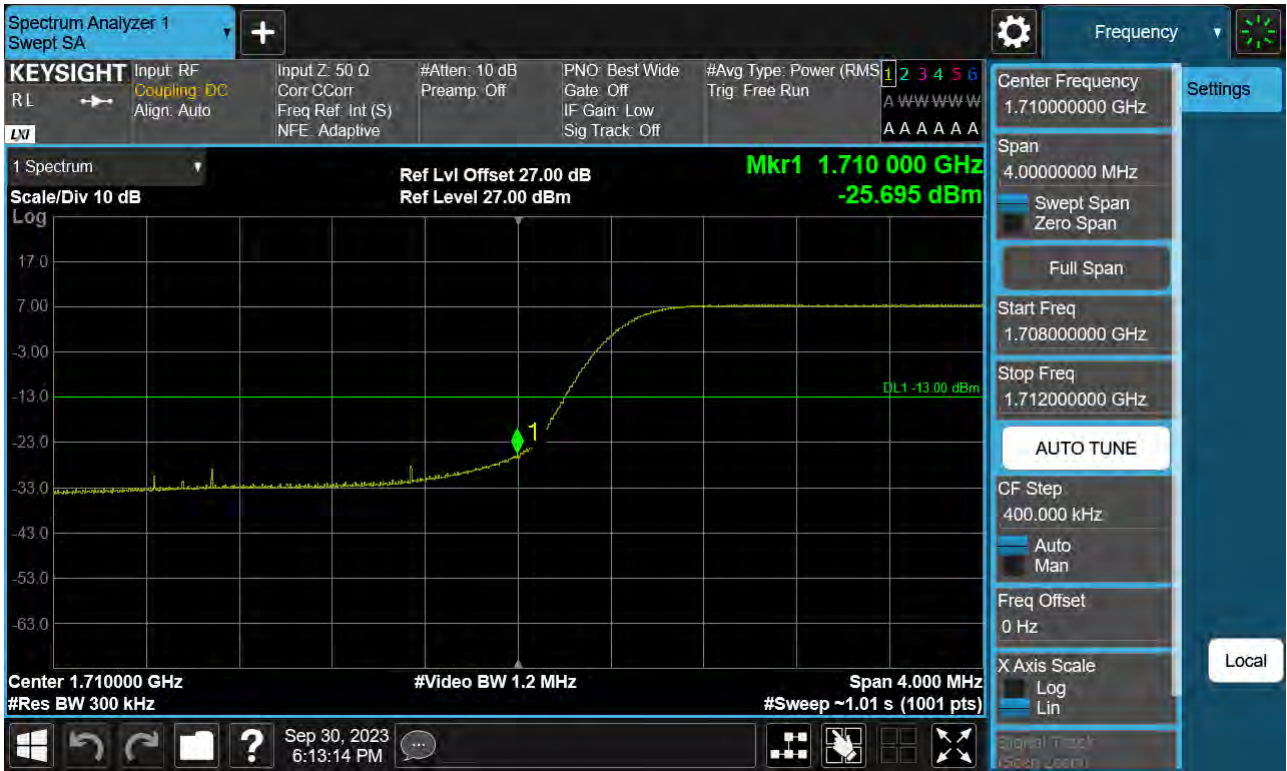

Lowest Channel_PCC 10 MHz Ch132022 RB50 Offset0 SCC 10 MHz Ch132121 RB50 Offset0(2)



Lowest Channel_PCC 10 MHz Ch132523 RB50 Offset0 SCC 10 MHz Ch132622 RB50 Offset0(1)



Lowest Channel_PCC 10 MHz Ch132523 RB50 Offset0 SCC 10 MHz Ch132622 RB50 Offset0(2)



9.5 Frequency Stability / Variation Of Ambient Temperature

- ▣ PCC Channel: 131997
- ▣ PCC Frequency: 1712.5 MHz
- ▣ PCC BandWidth: 5 MHz
- ▣ SCC Channel: 132045
- ▣ SCC Frequency: 1717.3 MHz
- ▣ SCC BandWidth: 5 MHz
- ▣ Voltage : 3.880 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	0.037	-0.028	1712.500	1717.29995
100%		-30	0.038	0.037	1712.500	1717.30006
100%		-20	-0.039	-0.035	1712.500	1717.29994
100%		-10	0.029	0.045	1712.500	1717.30008
100%		0	0.042	-0.039	1712.500	1717.29993
100%		10	-0.038	-0.036	1712.500	1717.29994
100%		30	0.037	0.035	1712.500	1717.30006
100%		40	-0.032	0.042	1712.500	1717.30007
100%		50	0.030	-0.040	1712.500	1717.29993
Batt. Endpoint		3.300	20	0.036	0.030	1712.500

- ▣ PCC Channel: 132022
- ▣ PCC Frequency: 1715.0 MHz
- ▣ PCC BandWidth: 10 MHz
- ▣ SCC Channel: 132094
- ▣ SCC Frequency: 1722.2 MHz
- ▣ SCC BandWidth: 5 MHz
- ▣ Voltage : 3.880 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	0.044	0.027	1715.00008	1722.20005
100%		-30	0.031	0.028	1715.00005	1722.20005
100%		-20	0.028	-0.040	1715.00005	1722.19993
100%		-10	0.043	0.040	1715.00007	1722.20007
100%		0	0.036	0.031	1715.00006	1722.20005
100%		10	0.046	0.035	1715.00008	1722.20006
100%		30	0.041	0.037	1715.00007	1722.20006
100%		40	0.040	0.028	1715.00007	1722.20005
100%		50	0.044	-0.028	1715.00007	1722.19995
Batt. Endpoint	3.300	20	0.028	-0.028	1715.00005	1722.19995

- PCC Channel: 132047
- PCC Frequency: 1717.5 MHz
- PCC BandWidth: 15 MHz
- SCC Channel: 132140
- SCC Frequency: 1726.8 MHz
- SCC BandWidth: 5 MHz
- Voltage : 3.880 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	0.036	0.033	1717.50006	1726.80006
100%		-30	0.045	0.043	1717.50008	1726.80007
100%		-20	-0.045	-0.047	1717.49992	1726.79992
100%		-10	0.028	-0.034	1717.50005	1726.79994
100%		0	-0.037	-0.040	1717.49994	1726.79993
100%		10	0.034	0.033	1717.50006	1726.80006
100%		30	0.046	0.046	1717.50008	1726.80008
100%		40	0.045	0.030	1717.50008	1726.80005
100%		50	-0.034	0.043	1717.49994	1726.80007
Batt. Endpoint	3.300	20	0.027	0.043	1717.50005	1726.80007

- PCC Channel: 132599
- PCC Frequency: 1772.7 MHz
- PCC BandWidth: 5 MHz
- SCC Channel: 132647
- SCC Frequency: 1777.5 MHz
- SCC BandWidth: 5 MHz
- Voltage : 3.880 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	0.029	-0.034	1772.70005	1777.49994
100%		-30	0.047	0.045	1772.70008	1777.50008
100%		-20	0.033	0.044	1772.70006	1777.50008
100%		-10	-0.031	-0.040	1772.69994	1777.49993
100%		0	0.031	-0.027	1772.70005	1777.49995
100%		10	-0.038	0.045	1772.69993	1777.50008
100%		30	0.030	-0.028	1772.70005	1777.49995
100%		40	-0.032	0.047	1772.69994	1777.50008
100%		50	-0.040	0.037	1772.69993	1777.50007
Batt. Endpoint		3.300	20	0.031	-0.044	1772.70005

- PCC Channel: 132572
- PCC Frequency: 1770.0 MHz
- PCC BandWidth: 10 MHz
- SCC Channel: 132644
- SCC Frequency: 1777.2 MHz
- SCC BandWidth: 5 MHz
- Voltage : 3.880 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	0.042	-0.028	1770.00007	1777.19995
100%		-30	0.038	-0.042	1770.00007	1777.19992
100%		-20	-0.041	0.044	1769.99993	1777.20008
100%		-10	0.033	-0.041	1770.00006	1777.19993
100%		0	-0.035	-0.045	1769.99994	1777.19992
100%		10	0.032	-0.042	1770.00006	1777.19993
100%		30	0.047	0.040	1770.00008	1777.20007
100%		40	0.030	0.036	1770.00005	1777.20006
100%		50	-0.033	-0.046	1769.99994	1777.19992
Batt. Endpoint		3.300	20	-0.042	0.034	1769.99993

- PCC Channel: 132549
- PCC Frequency: 1767.7 MHz
- PCC BandWidth: 15 MHz
- SCC Channel: 132642
- SCC Frequency: 1777.0 MHz
- SCC BandWidth: 5 MHz
- Voltage : 3.880 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.880	+20(Ref)	0.031	0.037	1767.70006	1777.00007
100%		-30	-0.035	0.035	1767.69994	1777.00006
100%		-20	0.033	-0.043	1767.70006	1776.99992
100%		-10	-0.040	0.036	1767.69993	1777.00006
100%		0	-0.034	0.033	1767.69994	1777.00006
100%		10	-0.034	-0.041	1767.69994	1776.99993
100%		30	-0.029	-0.038	1767.69995	1776.99993
100%		40	-0.039	0.034	1767.69993	1777.00006
100%		50	-0.045	0.047	1767.69992	1777.00008
Batt. Endpoint		3.300	20	0.043	-0.041	1767.70008

9.6 Radiated Spurious Emissions

- ▣ PCC Channel : 132047 (1717.5 MHz)
- ▣ PCC BW(MHz) : 15
- ▣ PCC RB/ RB Offset : 1/ 74
- ▣ SCC Channel : 132140 (1726.8 MHz)
- ▣ SCC BW(MHz) : 5
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -13.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
3 444.30	-54.79	12.39	-61.25	3.15	H	-52.01
5 166.45	-57.01	12.46	-55.22	3.78	H	-46.54
6 888.60	-56.01	11.80	-49.44	4.52	V	-42.16

- ▣ PCC Channel : 132353 (1748.1 MHz)
- ▣ PCC BW(MHz) : 5
- ▣ PCC RB/ RB Offset : 1/ 24
- ▣ SCC Channel : 132446 (1757.4 MHz)
- ▣ SCC BW(MHz) : 15
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -13.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
3 505.50	-55.18	12.34	-61.40	3.11	H	-52.17
5 258.25	-56.94	12.99	-56.62	3.83	H	-47.46
7 011.00	-55.14	11.26	-47.16	4.56	H	-40.46

- ▣ PCC Channel : 132504 (1763.5 MHz)
- ▣ PCC BW(MHz) : 5
- ▣ PCC RB/ RB Offset : 1/ 24
- ▣ SCC Channel : 132597 (1777.5 MHz)
- ▣ SCC BW(MHz) : 15
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -13.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
3 535.70	-55.07	12.34	-61.12	3.17	V	-51.95
5 303.55	-55.96	13.07	-55.19	3.95	V	-46.07
7 071.40	-56.53	10.97	-47.69	4.55	H	-41.27

9.7 Occupied Bandwidth

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	QPSK	25/ 0	5	132446	1757.4	QPSK	25/ 0	9.2559
5	132375	1750.3	QPSK	25/ 0	10	132447	1757.5	QPSK	50/ 0	13.934
10	132397	1752.5	QPSK	50/ 0	5	132469	1759.7	QPSK	25/ 0	13.915
5	132353	1748.1	QPSK	25/ 0	15	132446	1757.4	QPSK	75/ 0	18.182
15	132398	1752.6	QPSK	75/ 0	5	132491	1761.9	QPSK	25/ 0	18.256
10	132373	1750.1	QPSK	50/ 0	10	132472	1760.0	QPSK	50/ 0	18.833

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	16QAM	25/ 0	5	132446	1757.4	16QAM	25/ 0	9.2734
5	132375	1750.3	16QAM	25/ 0	10	132447	1757.5	16QAM	50/ 0	13.902
10	132397	1752.5	16QAM	50/ 0	5	132469	1759.7	16QAM	25/ 0	13.902
5	132353	1748.1	16QAM	25/ 0	15	132446	1757.4	16QAM	75/ 0	18.186
15	132398	1752.6	16QAM	75/ 0	5	132491	1761.9	16QAM	25/ 0	18.221
10	132373	1750.1	16QAM	50/ 0	10	132472	1760.0	16QAM	50/ 0	18.820

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	64QAM	25/ 0	5	132446	1757.4	64QAM	25/ 0	9.2678
5	132375	1750.3	64QAM	25/ 0	10	132447	1757.5	64QAM	50/ 0	13.872
10	132397	1752.5	64QAM	50/ 0	5	132469	1759.7	64QAM	25/ 0	13.873
5	132353	1748.1	64QAM	25/ 0	15	132446	1757.4	64QAM	75/ 0	18.179
15	132398	1752.6	64QAM	75/ 0	5	132491	1761.9	64QAM	25/ 0	18.292
10	132373	1750.1	64QAM	50/ 0	10	132472	1760.0	64QAM	50/ 0	18.771

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	256QAM	25/ 0	5	132446	1757.4	256QAM	25/ 0	9.2792
5	132375	1750.3	256QAM	25/ 0	10	132447	1757.5	256QAM	50/ 0	13.885
10	132397	1752.5	256QAM	50/ 0	5	132469	1759.7	256QAM	25/ 0	13.900
5	132353	1748.1	256QAM	25/ 0	15	132446	1757.4	256QAM	75/ 0	18.172
15	132398	1752.6	256QAM	75/ 0	5	132491	1761.9	256QAM	25/ 0	18.230
10	132373	1750.1	256QAM	50/ 0	10	132472	1760.0	256QAM	50/ 0	18.823


Note:

In order to simplify the report, attached plots were only widest bandwidth(10+10).


PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0_(QPSK)




PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0_(16QAM)

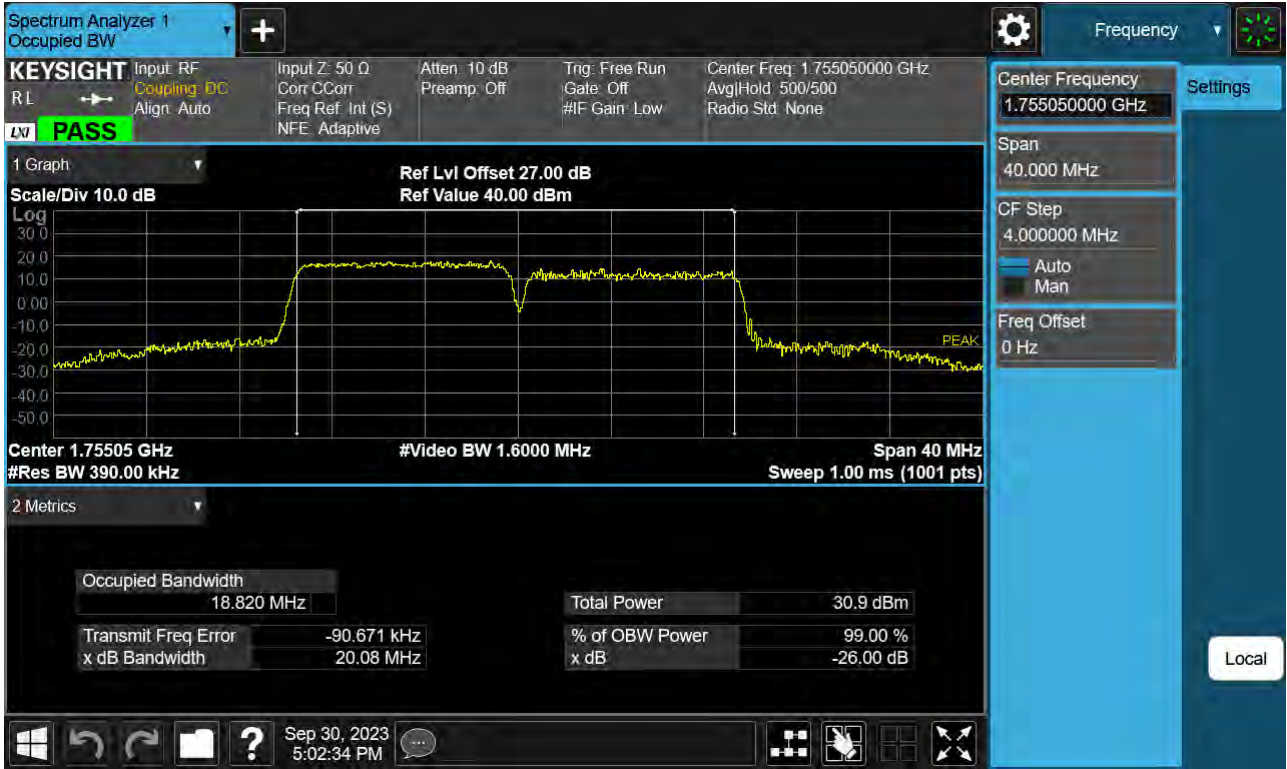

PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0_(64QAM)

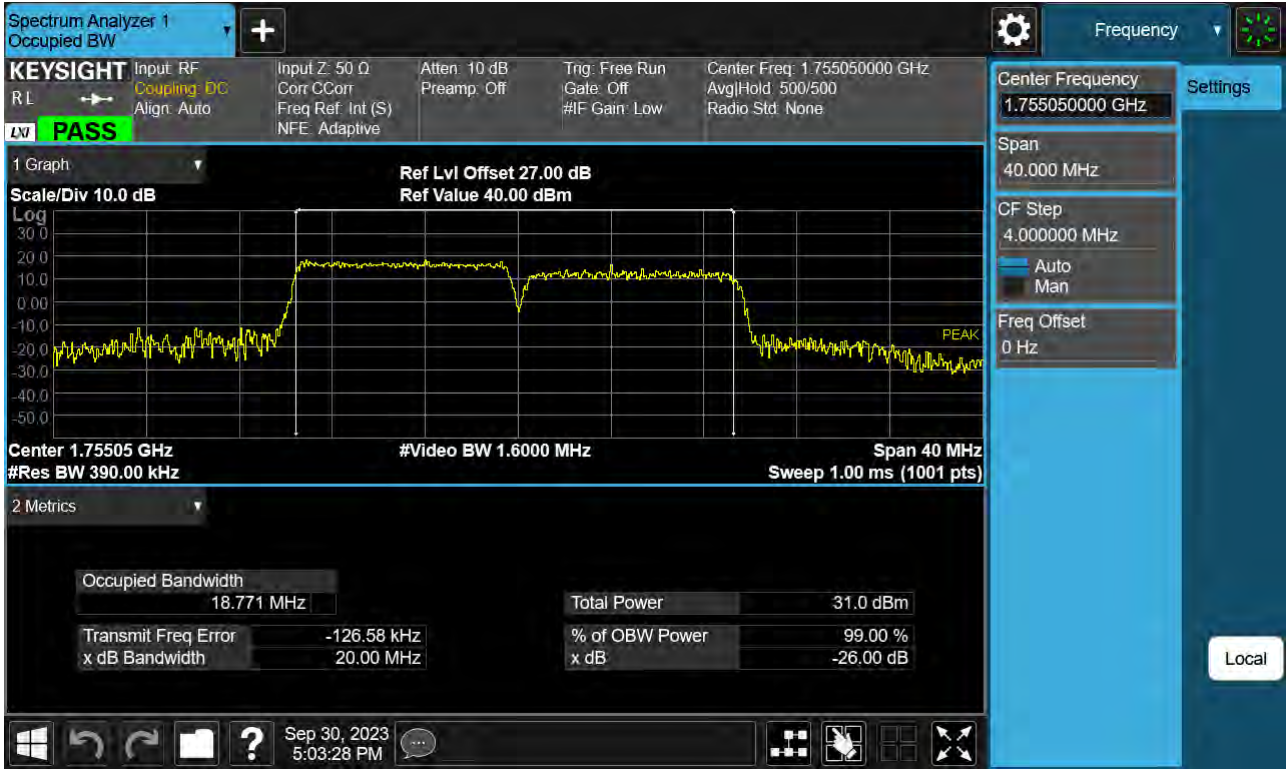

PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0_(256QAM)

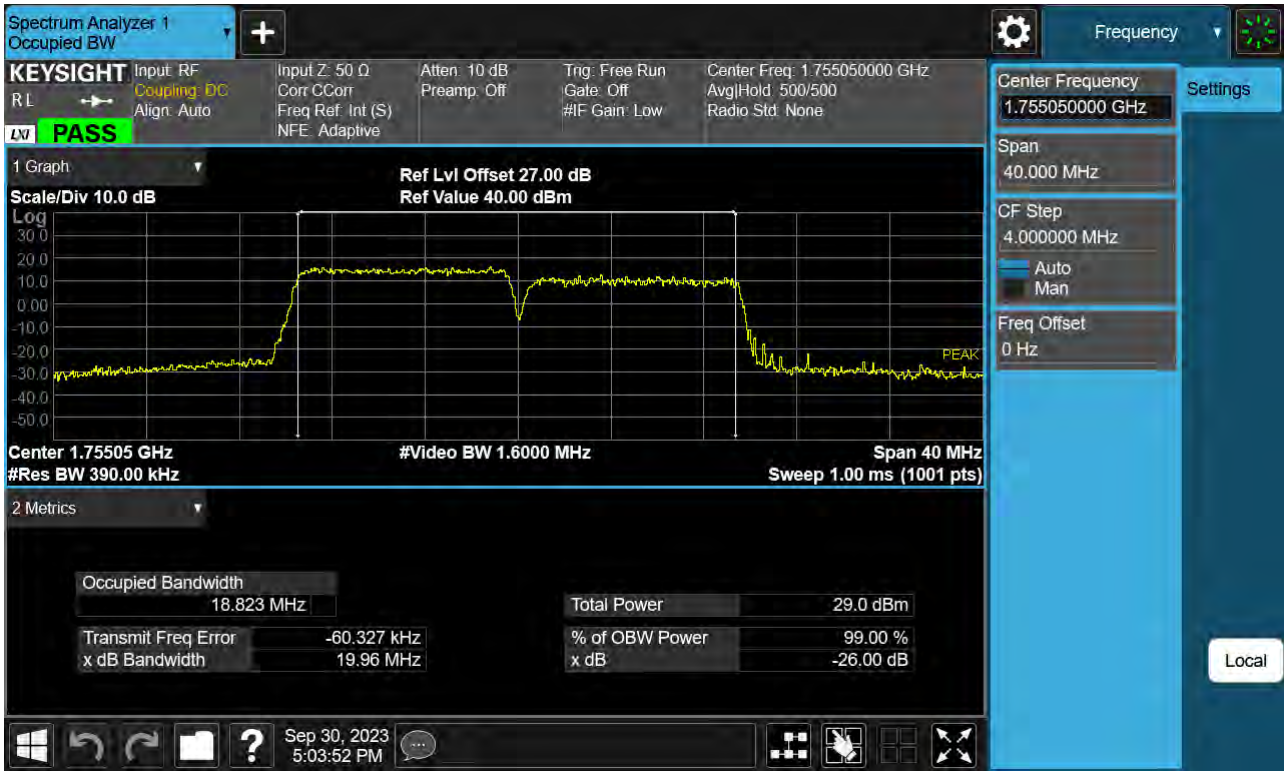

9.8 Peak- to- Average Ratio

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	QPSK	25/ 0	5	132446	1757.4	QPSK	25/ 0	5.22
5	132375	1750.3	QPSK	25/ 0	10	132447	1757.5	QPSK	50/ 0	5.20
10	132397	1752.5	QPSK	50/ 0	5	132469	1759.7	QPSK	25/ 0	5.31
5	132353	1748.1	QPSK	25/ 0	15	132446	1757.4	QPSK	75/ 0	5.18
15	132398	1752.6	QPSK	75/ 0	5	132491	1761.9	QPSK	25/ 0	5.26
10	132373	1750.1	QPSK	50/ 0	10	132472	1760.0	QPSK	50/ 0	5.26

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	16QAM	25/ 0	5	132446	1757.4	16QAM	25/ 0	5.99
5	132375	1750.3	16QAM	25/ 0	10	132447	1757.5	16QAM	50/ 0	6.25
10	132397	1752.5	16QAM	50/ 0	5	132469	1759.7	16QAM	25/ 0	6.27
5	132353	1748.1	16QAM	25/ 0	15	132446	1757.4	16QAM	75/ 0	6.23
15	132398	1752.6	16QAM	75/ 0	5	132491	1761.9	16QAM	25/ 0	6.32
10	132373	1750.1	16QAM	50/ 0	10	132472	1760.0	16QAM	50/ 0	6.27

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	64QAM	25/ 0	5	132446	1757.4	64QAM	25/ 0	6.74
5	132375	1750.3	64QAM	25/ 0	10	132447	1757.5	64QAM	50/ 0	6.56
10	132397	1752.5	64QAM	50/ 0	5	132469	1759.7	64QAM	25/ 0	6.67
5	132353	1748.1	64QAM	25/ 0	15	132446	1757.4	64QAM	75/ 0	6.66
15	132398	1752.6	64QAM	75/ 0	5	132491	1761.9	64QAM	25/ 0	6.49
10	132373	1750.1	64QAM	50/ 0	10	132472	1760.0	64QAM	50/ 0	6.79

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	256QAM	25/ 0	5	132446	1757.4	256QAM	25/ 0	7.02
5	132375	1750.3	256QAM	25/ 0	10	132447	1757.5	256QAM	50/ 0	7.03
10	132397	1752.5	256QAM	50/ 0	5	132469	1759.7	256QAM	25/ 0	6.98
5	132353	1748.1	256QAM	25/ 0	15	132446	1757.4	256QAM	75/ 0	7.02
15	132398	1752.6	256QAM	75/ 0	5	132491	1761.9	256QAM	25/ 0	7.00
10	132373	1750.1	256QAM	50/ 0	10	132472	1760.0	256QAM	50/ 0	7.16

Note:

In order to simplify the report, attached plots were only widest bandwidth(10+10).

PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0_(QPSK)



PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0_(16QAM)



PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0_(64QAM)



FCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0_(256QAM)



10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2310-FC034-P