

FCC 2G3G REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
October 26, 2023

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2309-FC041-R1

FCC ID: A3LSMS926U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-S926U
 Additional Model(s): SM-S926U1
 EUT Type: Mobile phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §22, §24, §27

Main 1 Ant

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
GSM850	824.2 – 848.8	869.2 – 893.8	250KGXW	0.429	26.32
GSM850 EDGE			245KG7W	0.084	19.26
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M16F9W	0.060	17.78

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	EIRP	
				Max. Power (W)	Max. Power (dBm)
GSM1900	1850.2 – 1909.8	1930.2 – 1989.8	248KGXW	0.879	29.44
GSM1900 EDGE			249KG7W	0.270	24.32
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	4M17F9W	0.206	23.14
WCDMA1700	1712.4 – 1752.6	2112.4 – 2152.6	4M17F9W	0.216	23.34

Sub 1 Ant

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
GSM850	824.2 – 848.8	869.2 – 893.8	248KGXW	0.805	29.06
GSM850 EDGE			248KG7W	0.159	22.01
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M17F9W	0.098	19.93

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report No.: HCT-RF-2309-FC041-R1

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test results were applied only to the test methods required by the standard.

Test Report Statement:

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2309-FC041	October 16, 2023	- First Approval Report
HCT-RF-2309-FC041-R1	October 26, 2023	- Revised the GSM850&WCDMA850 ERP result.(re-test)

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE	8
3.2 RADIATED POWER.....	9
3.3 RADIATED SPURIOUS EMISSIONS	10
3.4 PEAK- TO- AVERAGE RATIO.....	11
3.5 OCCUPIED BANDWIDTH.	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	14
3.7 BAND EDGE	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.9 WORST CASE(CONDUCTED TEST)	17
3.10 WORST CASE(RADIATED TEST)	18
4. LIST OF TEST EQUIPMENT	20
5. MEASUREMENT UNCERTAINTY	21
6. SUMMARY OF TEST RESULTS	22
7. SAMPLE CALCULATION	23
8. TEST DATA(Main 1 Ant).....	25
8.1 EFFECTIVE RADIATED POWER.....	25
8.2 EQUIVALENT ISOTROPIC RADIATED POWER.....	26
8.3 RADIATED SPURIOUS EMISSIONS	27
8.4 PEAK-TO-AVERAGE RATIO.....	32
8.5 OCCUPIED BANDWIDTH	33
8.6 CONDUCTED SPURIOUS EMISSIONS	34
8.7 BAND EDGE	34
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	35
9. TEST DATA(Sub 1 Ant)	46
9.1 EFFECTIVE RADIATED POWER.....	46
9.2 RADIATED SPURIOUS EMISSIONS	47
9.3 PEAK-TO-AVERAGE RATIO.....	49
9.4 OCCUPIED BANDWIDTH	50
9.5 CONDUCTED SPURIOUS EMISSIONS	51
9.6 BAND EDGE	51

9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE 52

10. TEST PLOTS(Main 1 Ant) 54

11. TEST PLOTS(Sub 1 Ant)..... 142

12. ANNEX A_ TEST SETUP PHOTO 174

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMS926U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§22, §24, §27, §2
EUT Type:	Mobile phone
Model(s):	SM-S926U
Additional Model(s):	SM-S926U1
Tx Frequency:	824.20 - 848.80 MHz (GSM850) 826.40 - 846.60 MHz (WCDMA850) 1 850.20 - 1 909.80 MHz (GSM1900) 1 852.4 - 1 907.6 MHz (WCDMA1900) 1 712.4 - 1 752.6 MHz (WCDMA1700)
Rx Frequency:	869.20 - 893.80 MHz (GSM850) 871.40 - 891.60 MHz (WCDMA850) 1 930.20 - 1 989.80 MHz (GSM1900) 1 932.4 - 1 987.6 MHz (WCDMA1900) 2 112.4 - 2 152.6 MHz (WCDMA1700)
Date(s) of Tests:	September 05, 2023 ~ October 26, 2023
Serial number:	Radiated: R3CW90B4EEV Conducted: R3CW808LYGJ(GSM1900, WCDMA 1700,1900), 741c314dee0f7ece(GSM850, WCDMA 850)

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6, mmWave.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), WIFI 6E, Bluetooth, BT LE, NFC, UWB, WPT.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test dat
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where: : P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15 \text{ dB}$$

3.4 PEAK- TO- AVERAGE RATIO

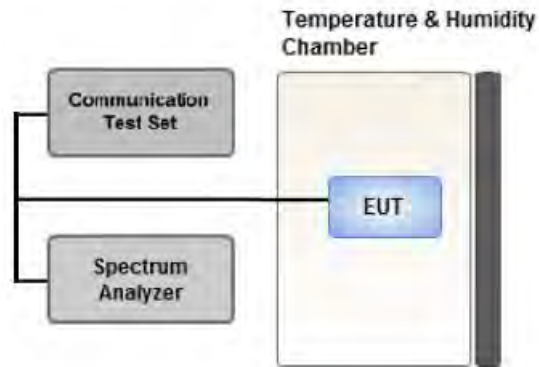

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \times \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \times \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

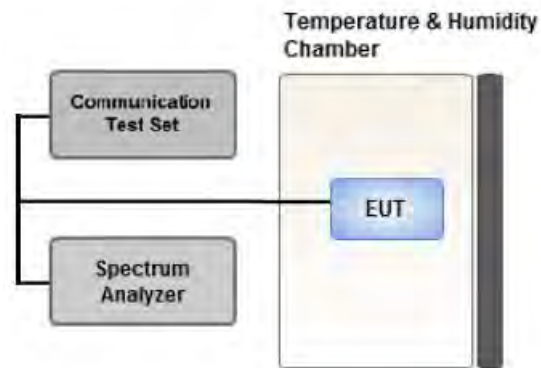

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

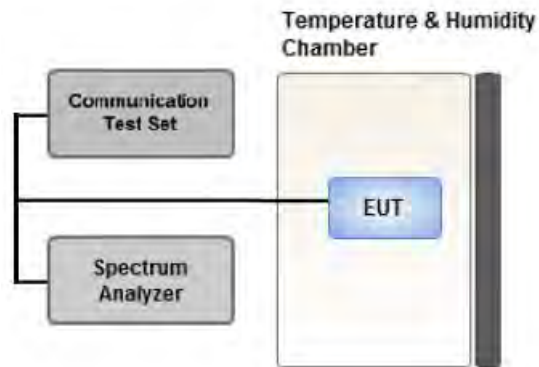

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings(GSM)

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

Test Settings(WCDMA)

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

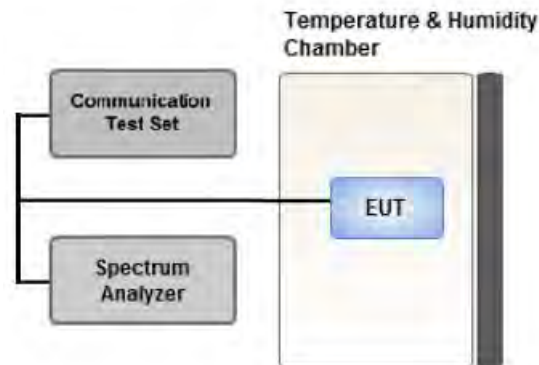

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \times \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz/ RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

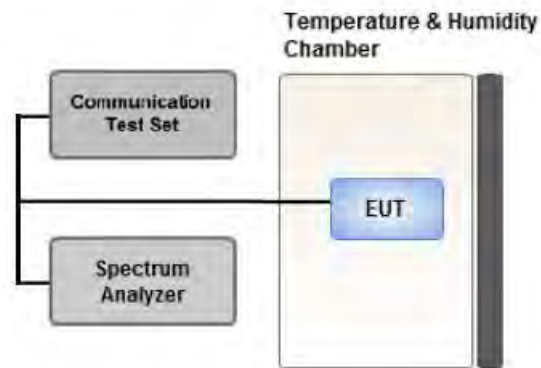

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- SM-S926U & additional models were tested and the worst case results are reported.
(Worst case : SM-S926U)

[Worst case]

Test Description	Modulation	Test Channel
Occupied Bandwidth	GSM : Voice & EDGE(1 TX Slot) WCDMA : QPSK(RMC)	Low, Mid, High
Band Edge	GSM : Voice & EDGE(1 TX Slot) WCDMA : QPSK(RMC)	Low, High
Peak-To-Average Ratio	GSM : Voice & EDGE(1 TX Slot) WCDMA : QPSK(RMC)	Mid
Spurious and Harmonic Emissions at Antenna Terminal	GSM : Voice WCDMA : QPSK(RMC)	Low, Mid, High

[Test Channel]

	Uplink Channel				
	2G (GSM850)	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)
Low	128	512	9262	1312	4132
Mid	190	661	9400	1412	4183
High	251	810	9538	1513	4233

3.10 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
 Mode : Stand alone, Simultaneous transmission scenarios
 Worst case : Stand alone
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- SM-S926U & additional models were tested and the worst case results are reported.
 (Worst case : SM-S926U)

[Main 1 Ant Worst case_3G]

Test Description	Modulation	Paging Service	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : Z	Low, Mid, High
			WCDMA B4 :Z	
			WCDMA B5 : X	
Radiated Spurious and Harmonic Emissions	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : Y	Low, Mid, High
			WCDMA B4 : Z	
			WCDMA B5 : Y	

[Main 1 Ant Worst case_2G]

Test Description	Mod	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	Voice	GSM850 : X	Low, Mid, High
		GSM1900 : Z	
	EDGE(1 TX Slot)	GSM850 : X	GSM 850 : Low
		GSM1900 : Z	GSM1900 : Mid
Radiated Spurious and Harmonic Emissions	Voice	GSM850 : X	Low, Mid, High
		GSM1900 : Z	

[Sub 1 Ant Worst case_3G]

Test Description	Modulation	Paging Service	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B5 : X	Low, Mid, High
Radiated Spurious and Harmonic Emissions	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B5 : X	Low, Mid, High

[Sub 1 Ant Worst case_2G]

Test Description	Mod	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	Voice	GSM850 : X	Low, Mid, High
	EDGE(1 TX Slot)	GSM850 : X	GSM 850 : High
Radiated Spurious and Harmonic Emissions	Voice	GSM850 : X	Low, Mid, High

[Test Channel]

	Uplink Channel				
	2G (GSM850)	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)
Low	128	512	9262	1312	4132
Mid	190	661	9400	1412	4183
High	251	810	9538	1513	4233

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	FBSR-02B(1.2G HPF+LNA)	T&M SYSTEM	F1L1	01/19/2024	Annual
RF Switching System	FBSR-02B(3.3G HPF+LNA)	T&M SYSTEM	F1L2	01/19/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/19/2024	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/23/2024	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/11/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/20/2024	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/19/2024	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/17/2024	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/10/2024	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	03/21/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	12/01/2023	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/05/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	06/22/2024	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/24/2024	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, especially all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.16 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.57 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a), §24.238(a), §27.53(h)	< 43 + 10 x log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§22.913(d), §24.232(d), §27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, § 22.355	< 2.5 ppm	PASS
	§24.235, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP	PASS
Equivalent Isotropic Radiated Power	§24.232(c), §27.50(d)(4)	< 2 Watts max. EIRP < 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a), §24.238(a), §27.53(h)	< 43 + 10 x log ₁₀ (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA(Main 1 Ant)

8.1 EFFECTIVE RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit W	ERP	
	channel	Freq.(MHz)							W	dBm
GSM850	128	824.2	-23.15	37.75	-10.05	1.38	H	< 7.00	0.429	26.32
	190	836.6	-23.86	37.43	-10.05	1.40	H		0.396	25.98
	251	848.8	-24.72	36.86	-10.05	1.41	H		0.347	25.40
EDGE	128	824.2	-30.21	30.69	-10.05	1.38	H		0.084	19.26

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit W	ERP	
	channel	Freq.(MHz)							W	dBm
WCDMA850	4132	826.4	-32.08	28.84	-10.05	1.39	H	< 7.00	0.055	17.40
	4183	836.6	-32.06	29.23	-10.05	1.40	H		0.060	17.78
	4233	846.6	-32.81	28.83	-10.05	1.41	H		0.055	17.37

8.2 EQUIVALENT ISOTROPIC RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
GSM1900	512	1850.2	-13.40	20.42	10.31	2.23	V	< 2.00	0.708	28.50
	661	1880.0	-13.28	21.42	10.35	2.33	V		0.879	29.44
	810	1909.8	-13.78	20.26	10.40	2.29	V		0.687	28.37
EDGE	661	1880.0	-18.40	16.30	10.35	2.33	V		0.270	24.32

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA1900	9262	1852.4	-19.52	14.37	10.31	2.23	V	< 2.00	0.176	22.45
	9400	1880.0	-19.58	15.12	10.35	2.33	V		0.206	23.14
	9538	1907.6	-19.71	14.33	10.40	2.29	V		0.175	22.44

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA1700	1312	1712.4	-18.88	14.85	9.94	2.24	V	< 1.00	0.180	22.55
	1412	1732.4	-18.78	14.91	10.07	2.17	V		0.191	22.81
	1513	1752.6	-18.39	15.32	10.17	2.15	V		0.216	23.34

8.3 RADIATED SPURIOUS EMISSIONS

▣ MODULATION SIGNAL: GSM850

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute Level</u> [dBm]	C.L	Pol.	Result (dBm)	Limit
128 (824.2)	1 648.40	-52.35	9.58	-62.75	2.14	H	-55.31	-13.00
	2 472.60	-55.25	10.26	-59.73	2.66	H	-52.13	-13.00
	3 296.80	-57.45	12.13	-58.58	3.02	V	-49.46	-13.00
	4 121.00	-58.55	12.66	-56.31	3.42	V	-47.07	-13.00
	4 945.20	-59.19	12.62	-53.27	3.84	H	-44.49	-13.00
190 (836.6)	1 673.20	-52.52	9.69	-63.30	2.14	V	-55.75	-13.00
	2 509.80	-56.03	10.59	-60.24	2.57	H	-52.22	-13.00
	3 346.40	-59.09	12.38	-60.36	3.11	H	-51.10	-13.00
	4 183.00	-58.67	12.67	-56.60	3.36	V	-47.29	-13.00
	5 019.60	-59.06	12.52	-52.80	3.91	H	-44.19	-13.00
251 (848.8)	1 697.60	-53.18	9.88	-62.82	2.23	H	-55.17	-13.00
	2 546.40	-54.17	10.67	-57.45	2.64	V	-49.42	-13.00
	3 395.20	-58.74	12.50	-60.14	3.01	V	-50.65	-13.00
	4 244.00	-59.06	12.63	-56.45	3.54	H	-47.37	-13.00
	5 092.80	-59.42	12.22	-52.33	3.71	V	-43.82	-13.00

▣ MODULATION SIGNAL: GSM1900

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
512 (1850.2)	3 700.40	-54.92	12.29	-59.96	3.13	H	-50.80	-13.00
	5 550.60	-56.17	13.03	-54.47	3.98	H	-45.42	-13.00
	7 400.80	-55.51	10.80	-45.29	4.68	V	-39.17	-13.00
661 (1880.0)	3 760.00	-55.30	12.22	-59.93	3.27	V	-50.98	-13.00
	5 640.00	-56.56	13.12	-54.43	4.07	V	-45.38	-13.00
	7 520.00	-56.95	10.82	-46.14	4.71	H	-40.03	-13.00
810 (1909.8)	3 819.60	-53.99	12.16	-58.65	3.26	V	-49.75	-13.00
	5 729.40	-55.46	13.04	-53.06	4.12	H	-44.14	-13.00
	7 639.20	-55.94	11.21	-45.79	4.73	V	-39.31	-13.00

▣ MODULATION SIGNAL: WCDMA850

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured Level [dBm]</u>	Ant. Gain (dBi)	<u>Substitute Level [dBm]</u>	C.L	Pol.	Result (dBm)	Limit
4 132 (826.4)	1 652.80	-53.15	9.58	-63.55	2.14	H	-56.11	-13.00
	2 479.20	-54.82	10.34	-59.30	2.62	H	-51.58	-13.00
	3 305.60	-56.91	12.19	-58.10	3.02	V	-48.94	-13.00
	4 132.00	-58.23	12.67	-56.62	3.51	V	-47.46	-13.00
	4 958.40	-58.37	12.60	-52.25	3.72	V	-43.37	-13.00
4 183 (836.6)	1 673.20	-52.40	9.69	-63.18	2.14	V	-55.63	-13.00
	2 509.80	-54.64	10.59	-58.85	2.57	V	-50.83	-13.00
	3 346.40	-57.74	12.38	-59.01	3.11	H	-49.75	-13.00
	4 183.00	-57.86	12.67	-55.79	3.36	H	-46.48	-13.00
	5 019.60	-58.43	12.52	-52.17	3.91	V	-43.56	-13.00
4 233 (846.6)	1 693.20	-51.91	9.82	-62.17	2.18	V	-54.53	-13.00
	2 539.80	-54.64	10.67	-57.96	2.63	V	-49.92	-13.00
	3 386.40	-57.54	12.53	-58.67	3.05	V	-49.19	-13.00
	4 233.00	-57.75	12.63	-55.00	3.51	V	-45.88	-13.00
	5 079.60	-58.75	12.26	-51.95	3.70	V	-43.39	-13.00

▣ MODULATION SIGNAL: WCDMA1900

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute Level</u> [dBm]	C.L	Pol.	Result (dBm)	Limit
9262 (1852.4)	3 704.80	-54.25	12.29	-59.30	3.14	H	-50.15	-13.00
	5 557.20	-56.07	13.04	-54.44	3.92	H	-45.32	-13.00
	7 409.60	-54.90	10.79	-44.89	4.68	H	-38.78	-13.00
9400 (1880.0)	3 760.00	-54.42	12.22	-58.94	3.27	H	-49.99	-13.00
	5 640.00	-56.38	13.12	-54.11	4.07	V	-45.06	-13.00
	7 520.00	-56.32	10.82	-45.51	4.71	H	-39.40	-13.00
9538 (1907.6)	3 815.20	-53.86	12.16	-58.71	3.25	H	-49.80	-13.00
	5 722.80	-55.60	13.06	-53.07	4.15	H	-44.16	-13.00
	7 630.40	-55.90	11.18	-45.74	4.74	V	-39.30	-13.00

▣ MODULATION SIGNAL: WCDMA1700

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute Level</u> [dBm]	C.L	Pol.	Result (dBm)	Limit
1312 (1712.4)	3 424.80	-54.06	12.43	-60.74	3.06	V	-51.37	-13.00
	5 137.20	-56.17	12.35	-53.42	3.92	V	-44.99	-13.00
	6 849.60	-55.29	11.90	-48.81	4.49	H	-41.40	-13.00
1412 (1732.4)	3 464.80	-53.50	12.35	-60.14	3.11	H	-50.90	-13.00
	5 197.20	-55.73	12.63	-54.65	3.86	V	-45.88	-13.00
	6 929.60	-55.08	11.65	-47.95	4.52	H	-40.82	-13.00
1513 (1752.6)	3 505.20	-52.19	12.34	-58.41	3.11	V	-49.18	-13.00
	5 257.80	-48.15	12.99	-47.83	3.83	H	-38.67	-13.00
	7 010.40	-54.88	11.26	-46.90	4.56	H	-40.20	-13.00

8.4 PEAK-TO-AVERAGE RATIO

Band	Ch.	Measured P _{PK} (dBm)	Measured P _{Avg} (dBm)	P _{Avg} (Duty Cycle)			P.A.R. = P _{PK} - P _{Avg} (dB)	Limit (dB)	Pass / Fail		
				Tx _{Total} (ms)	Tx _{On} (ms)	Factor (dB)					
GSM1900	661	30.198	19.73	4.6160	0.5475	9.26	1.21	13	Pass		
GSM1900 EDGE	661	28.443	15.70	4.6160	0.5475	9.26	3.48				
GSM850	190	CCDF Procedure					3.03			13	Pass
GSM850 EDGE	190						5.92				
WCDMA850	4408						2.84				
WCDMA1900	9400						2.89				
WCDMA1700	1412						2.94				

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 72 ~ 82.
2. Only GSM(include EDGE) Mode was tested by alternate procedure for PAPR

$P.A.R. (dB) = P_{PK} (dBm) - P_{Avg} (dBm)$ (P_{Avg} = Average Power + Duty cycle Factor)

Duty cycle Factor = $10 \times \log (1/X)$, X = Tx_{On} / Tx_{Total}

8.5 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	249.45
	190	836.60	243.69
	251	848.80	250.18
GSM850 EDGE	128	824.20	242.72
	190	836.60	245.34
	251	848.80	238.08
GSM1900	512	1,850.20	246.80
	661	1,880.00	248.23
	810	1,909.80	243.46
GSM1900 EDGE	512	1,850.20	248.63
	661	1,880.00	243.35
	810	1,909.80	245.82
WCDMA850	4132	826.40	4.1478
	4183	836.60	4.1631
	4233	846.60	4.1436
WCDMA1900	9262	1852.40	4.1466
	9400	1880.00	4.1712
	9538	1907.60	4.1625
WCDMA1700	1312	1712.40	4.1490
	1412	1732.40	4.1443
	1513	1752.60	4.1663

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 55 ~ 71.

8.6 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result	(dBm)
GSM850	128	3.7000	27.976	-57.41	-29.436	-13.00
	190	3.2822	27.976	-56.26	-28.286	
	251	3.6955	27.976	-57.06	-29.086	
GSM1900	512	18.6410	29.489	-53.237	-23.748	
	661	19.0215	29.489	-52.563	-23.074	
	810	19.2570	29.489	-52.537	-23.048	
WCDMA850	4132	2.4761	27.976	-76.493	-48.517	
	4183	2.5125	27.976	-76.420	-48.444	
	4233	2.5404	27.976	-76.205	-48.229	
WCDMA1900	9262	18.9157	29.489	-72.814	-43.325	
	9400	18.9535	29.489	-72.739	-43.250	
	9538	18.9107	29.489	-72.967	-43.478	
WCDMA1700	1312	18.9300	29.489	-72.808	-43.319	
	1412	18.9075	29.489	-72.850	-43.361	
	1513	18.8890	29.489	-72.746	-43.257	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 119 ~ 142.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.7 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 83 ~ 118.

8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: GSM850
- ▣ OPERATING FREQUENCY: 836,600,000 Hz
- ▣ CHANNEL: 190
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 600 011	0.0	0.000 000	0.0000
100 %		-30	836 600 018	7.6	0.000 001	0.0091
100 %		-20	836 600 021	9.9	0.000 001	0.0119
100 %		-10	836 600 021	10.3	0.000 001	0.0123
100 %		0	836 600 018	7.3	0.000 001	0.0087
100 %		+10	836 600 022	11.0	0.000 001	0.0132
100 %		+30	836 600 022	11.0	0.000 001	0.0131
100 %		+40	836 600 019	8.8	0.000 001	0.0105
100 %		+50	836 600 020	9.7	0.000 001	0.0116
Batt. Endpoint		3.300	+20	836 600 019	8.8	0.000 001

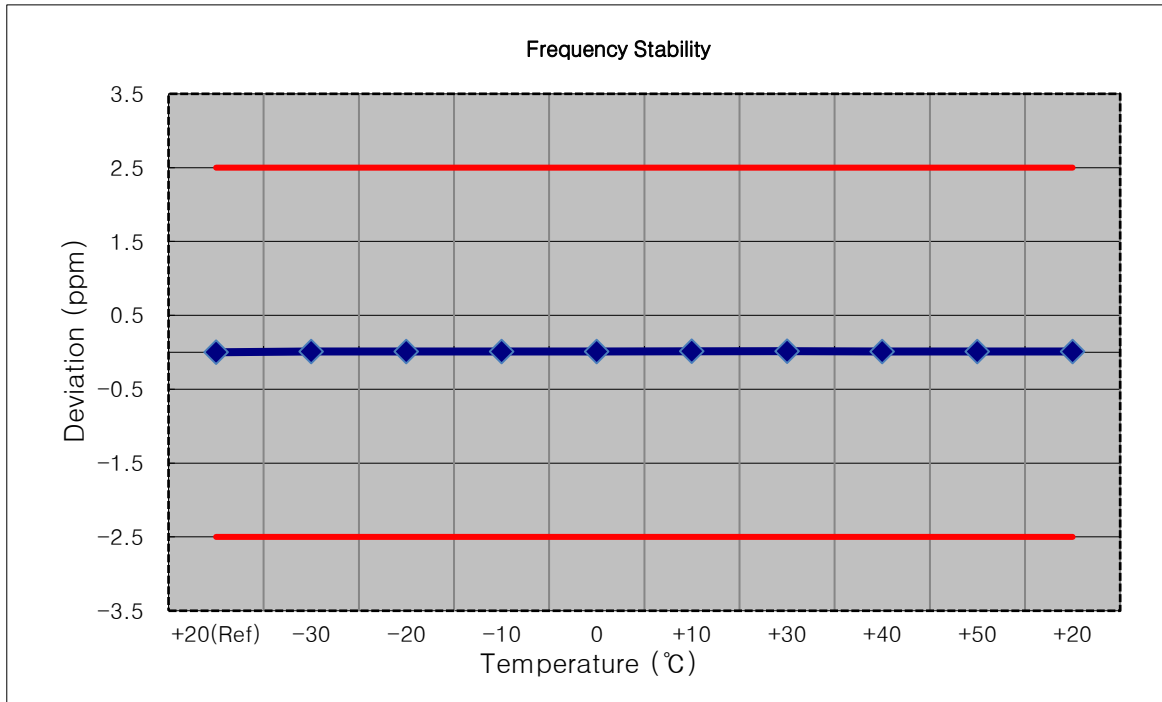


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1850,200,000 Hz
- ▣ CHANNEL: 512
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1850 200 007	0.0	0.000 000	0.0000
100 %		-30	1850 200 015	7.4	0.000 000	0.0040
100 %		-20	1850 200 014	6.9	0.000 000	0.0037
100 %		-10	1850 200 017	10.0	0.000 001	0.0054
100 %		0	1850 200 012	5.1	0.000 000	0.0028
100 %		+10	1850 200 003	-3.9	0.000 000	-0.0021
100 %		+30	1850 200 013	5.6	0.000 000	0.0031
100 %		+40	1850 200 002	-5.5	0.000 000	-0.0030
100 %		+50	1850 200 013	5.8	0.000 000	0.0031
Batt. Endpoint	3.300	+20	1850 200 013	6.0	0.000 000	0.0032

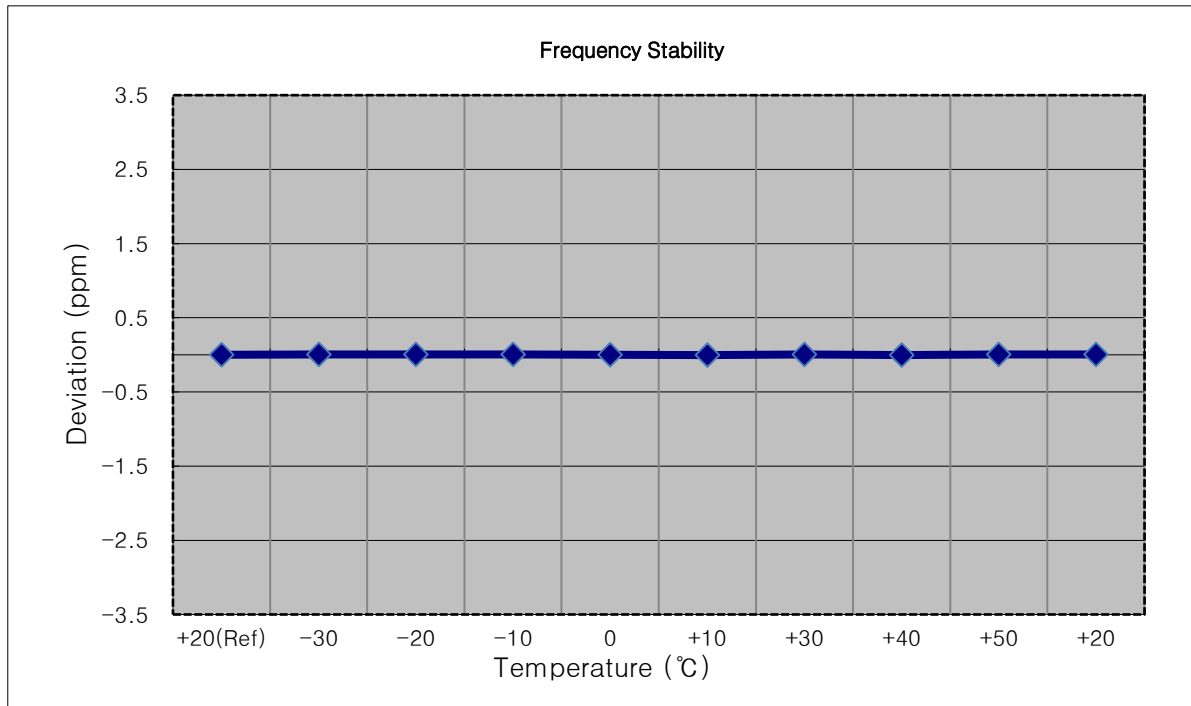


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 661
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1880 000 009	0.0	0.000 000	0.000
100 %		-30	1880 000 017	7.8	0.000 000	0.004
100 %		-20	1880 000 019	9.6	0.000 001	0.005
100 %		-10	1880 000 019	9.9	0.000 001	0.005
100 %		0	1880 000 019	9.4	0.000 001	0.005
100 %		+10	1880 000 018	9.0	0.000 000	0.005
100 %		+30	1880 000 021	11.7	0.000 001	0.006
100 %		+40	1880 000 020	10.9	0.000 001	0.006
100 %		+50	1880 000 017	7.7	0.000 000	0.004
Batt. Endpoint	3.300	+20	1880 000 018	9.0	0.000 000	0.005

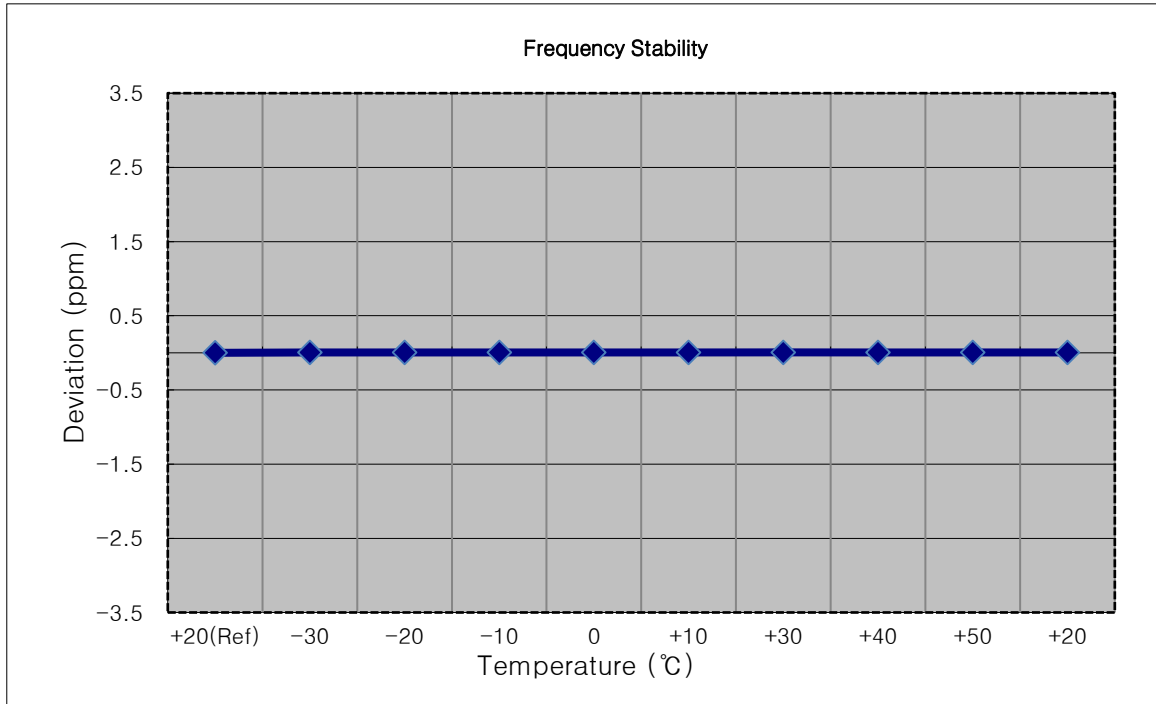


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1909,800,000 Hz
- ▣ CHANNEL: 810
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1909 800 008	0.0	0.000 000	0.000
100 %		-30	1909 800 018	9.6	0.000 001	0.005
100 %		-20	1909 800 016	7.8	0.000 000	0.004
100 %		-10	1909 800 015	7.0	0.000 000	0.004
100 %		0	1909 800 015	6.9	0.000 000	0.004
100 %		+10	1909 800 018	9.8	0.000 001	0.005
100 %		+30	1909 800 014	6.1	0.000 000	0.003
100 %		+40	1909 800 015	6.6	0.000 000	0.003
100 %		+50	1909 800 014	5.9	0.000 000	0.003
Batt. Endpoint		3.300	+20	1909 800 018	9.9	0.000 001

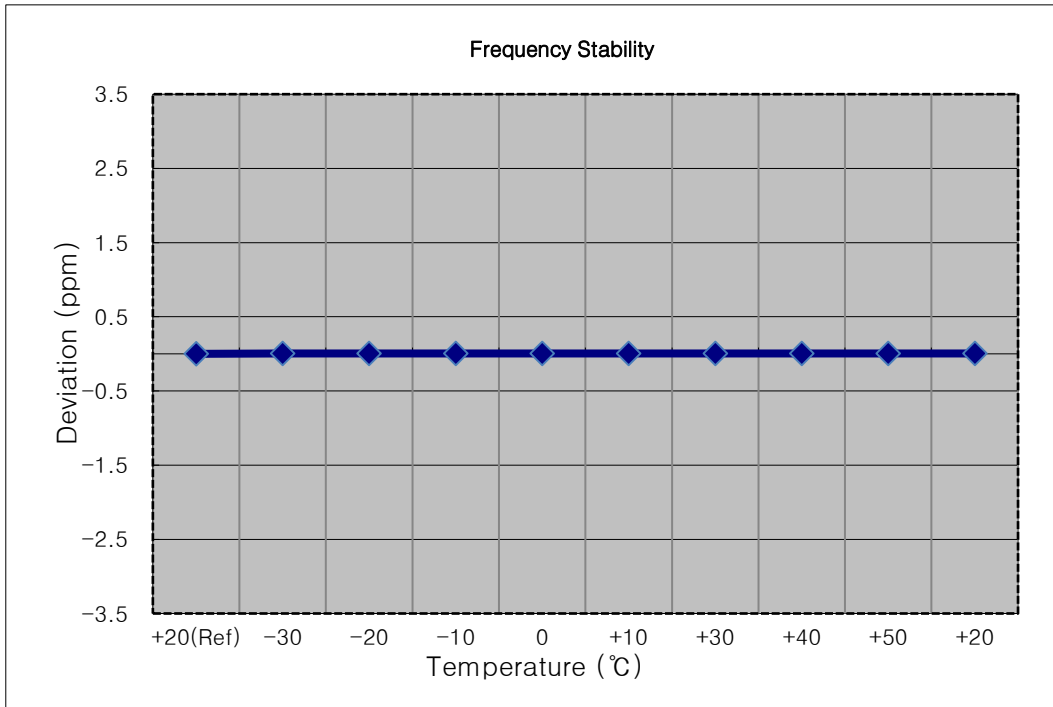


- ▣ Mode: WCDMA850
- ▣ OPERATING FREQUENCY: 836,600,000 Hz
- ▣ CHANNEL: 4183
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 600 001	0.0	0.000 000	0.0000
100 %		-30	836 600 002	1.0	0.000 000	0.0012
100 %		-20	836 600 002	1.0	0.000 000	0.0013
100 %		-10	836 600 002	0.9	0.000 000	0.0011
100 %		0	836 600 002	1.1	0.000 000	0.0013
100 %		+10	836 600 003	1.4	0.000 000	0.0016
100 %		+30	836 600 000	-1.0	0.000 000	-0.0012
100 %		+40	836 600 000	-1.1	0.000 000	-0.0013
100 %		+50	836 600 002	1.0	0.000 000	0.0012
Batt. Endpoint		3.300	+20	836 600 002	1.2	0.000 000

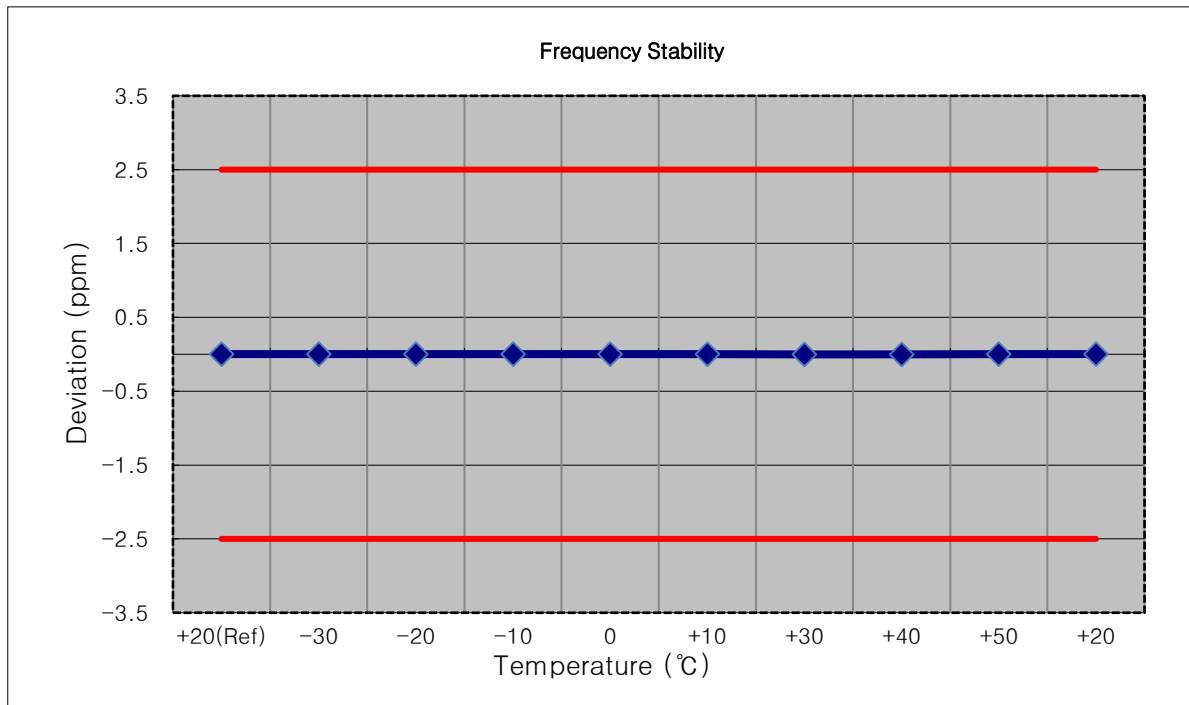


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,852,400,000 Hz
- ▣ CHANNEL: 9262
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1852 400 005	0.0	0.000 000	0.0000
100 %		-30	1852 400 010	5.3	0.000 000	0.0029
100 %		-20	1852 400 011	6.0	0.000 000	0.0032
100 %		-10	1852 400 011	5.9	0.000 000	0.0032
100 %		0	1852 400 010	5.7	0.000 000	0.0031
100 %		+10	1852 400 010	5.6	0.000 000	0.0030
100 %		+30	1852 400 012	7.3	0.000 000	0.0039
100 %		+40	1852 400 010	5.5	0.000 000	0.0030
100 %		+50	1852 400 011	5.8	0.000 000	0.0031
Batt. Endpoint	3.300	+20	1852 400 012	6.8	0.000 000	0.0037

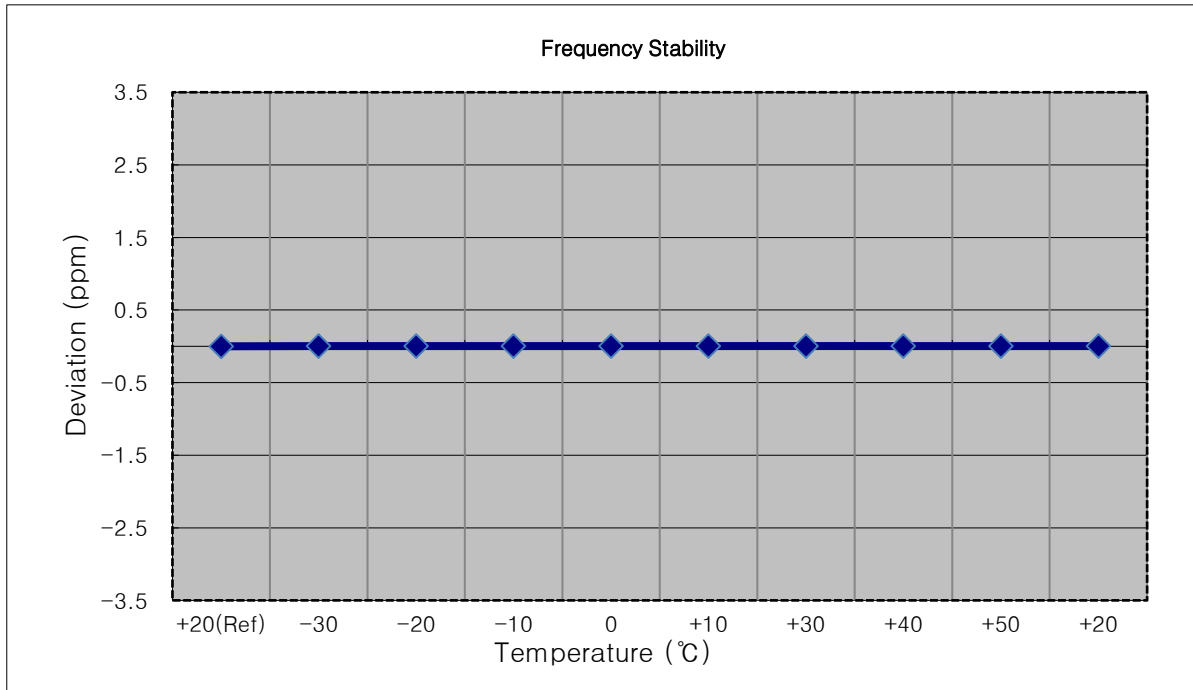


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,880,000,000 Hz
- ▣ CHANNEL: 9400
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1880 000 003	0.0	0.000 000	0.0000
100 %		-30	1880 000 006	3.1	0.000 000	0.0016
100 %		-20	1880 000 006	3.1	0.000 000	0.0016
100 %		-10	1880 000 006	3.2	0.000 000	0.0017
100 %		0	1880 000 007	3.9	0.000 000	0.0021
100 %		+10	1880 000 007	3.5	0.000 000	0.0019
100 %		+30	1880 000 007	4.1	0.000 000	0.0022
100 %		+40	1880 000 007	3.8	0.000 000	0.0020
100 %		+50	1880 000 007	3.7	0.000 000	0.0020
Batt. Endpoint		3.300	+20	1880 000 006	3.3	0.000 000

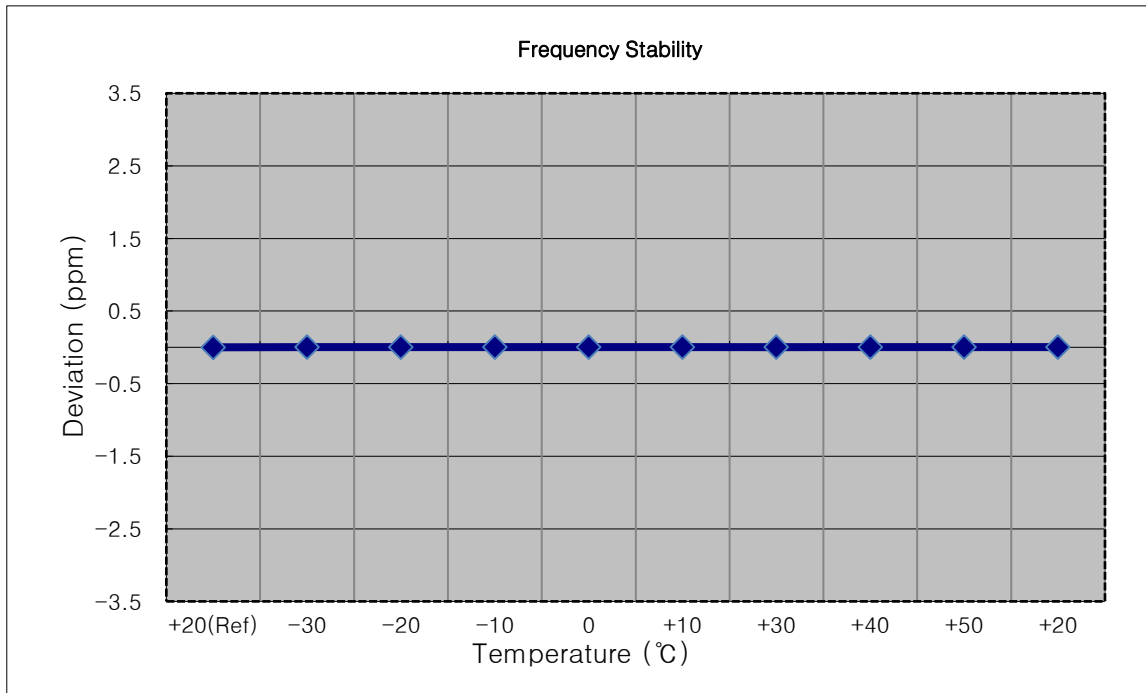


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,907,600,000 Hz
- ▣ CHANNEL: 9538
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1907 599 999	0.0	0.000 000	0.0000
100 %		-30	1907 599 997	-1.4	0.000 000	-0.0008
100 %		-20	1907 599 997	-1.9	0.000 000	-0.0010
100 %		-10	1907 599 996	-2.5	0.000 000	-0.0013
100 %		0	1907 599 997	-1.5	0.000 000	-0.0008
100 %		+10	1907 599 997	-1.6	0.000 000	-0.0009
100 %		+30	1907 599 997	-1.8	0.000 000	-0.0009
100 %		+40	1907 600 000	1.8	0.000 000	0.0009
100 %		+50	1907 599 997	-2.0	0.000 000	-0.0011
Batt. Endpoint		3.300	+20	1907 599 996	-2.3	0.000 000

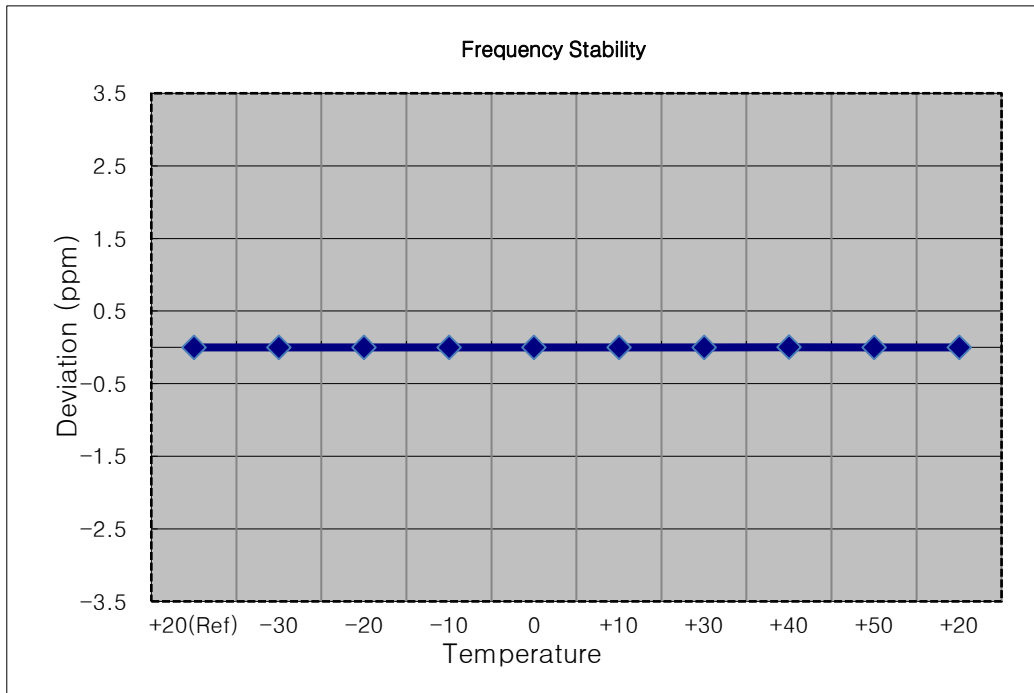


- ▣ Mode: WCDMA1700
- ▣ OPERATING FREQUENCY: 1,712,400,000 Hz
- ▣ CHANNEL: 1312
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1712 400 009	0.0	0.000 000	0.0000
100 %		-30	1712 400 017	8.2	0.000 000	0.0048
100 %		-20	1712 400 018	9.7	0.000 001	0.0057
100 %		-10	1712 400 018	9.3	0.000 001	0.0054
100 %		0	1712 400 018	9.6	0.000 001	0.0056
100 %		+10	1712 400 017	8.8	0.000 001	0.0051
100 %		+30	1712 400 018	9.0	0.000 001	0.0053
100 %		+40	1712 400 017	8.5	0.000 000	0.0050
100 %		+50	1712 400 018	8.8	0.000 001	0.0052
Batt. Endpoint		3.300	+20	1712 400 017	8.5	0.000 000

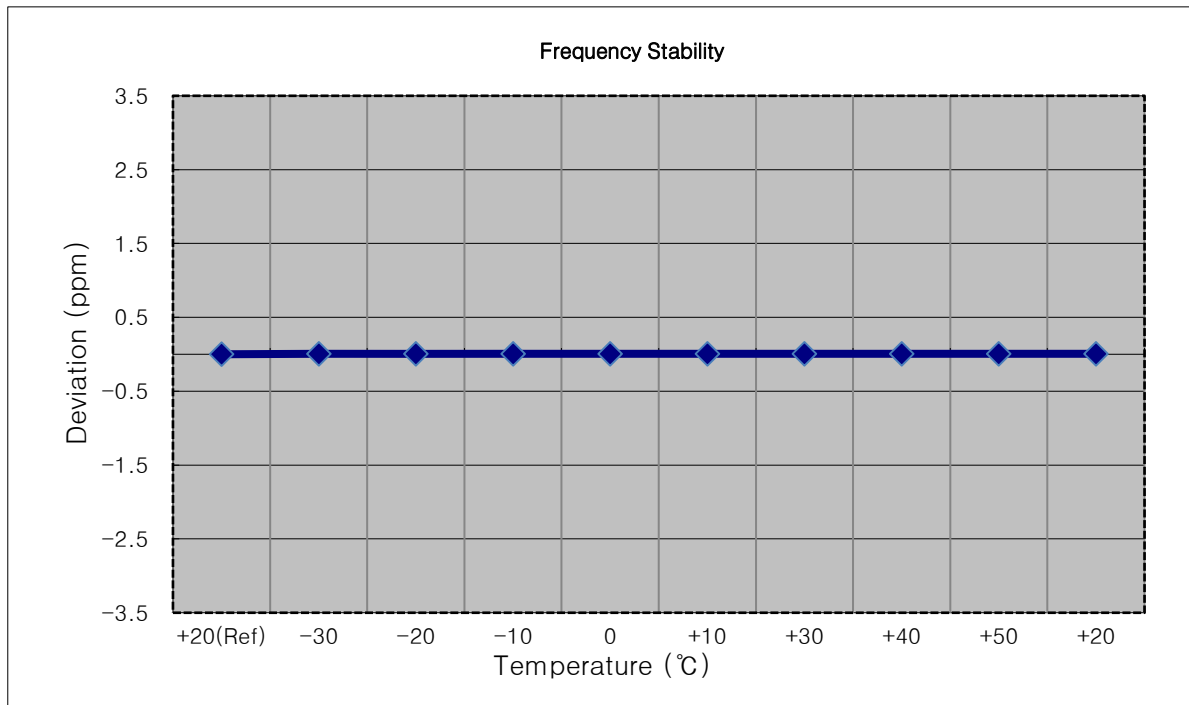


- ▣ Mode: WCDMA1700
- ▣ OPERATING FREQUENCY: 1,732,400,000 Hz
- ▣ CHANNEL: 1412
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1732 400 002	0.0	0.000 000	0.0000
100 %		-30	1732 400 003	1.5	0.000 000	0.0009
100 %		-20	1732 400 004	2.3	0.000 000	0.0013
100 %		-10	1732 400 003	1.6	0.000 000	0.0009
100 %		0	1732 400 004	2.1	0.000 000	0.0012
100 %		+10	1732 400 004	2.1	0.000 000	0.0012
100 %		+30	1732 400 004	2.0	0.000 000	0.0012
100 %		+40	1732 400 004	1.8	0.000 000	0.0011
100 %		+50	1732 400 005	2.9	0.000 000	0.0017
Batt. Endpoint	3.300	+20	1732 400 004	2.5	0.000 000	0.0015

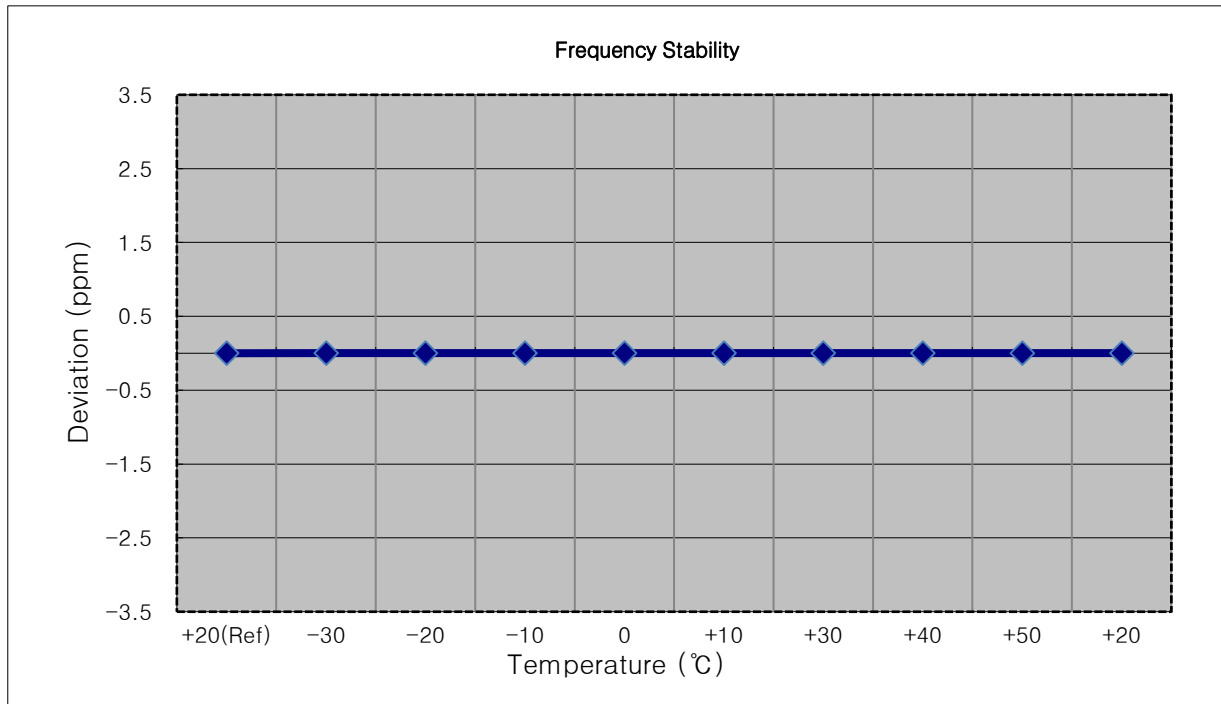

- ▣ Mode: WCDMA1700
- ▣ OPERATING FREQUENCY: 1,752,600,000 Hz
- ▣ CHANNEL: 1513
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1752 599 990	0.0	0.000 000	0.0000
100 %		-30	1752 599 980	-10.0	-0.000 001	-0.0057
100 %		-20	1752 599 981	-9.1	-0.000 001	-0.0052
100 %		-10	1752 599 980	-10.5	-0.000 001	-0.0060
100 %		0	1752 599 980	-10.0	-0.000 001	-0.0057
100 %		+10	1752 599 981	-9.8	-0.000 001	-0.0056
100 %		+30	1752 599 981	-9.8	-0.000 001	-0.0056
100 %		+40	1752 599 980	-10.1	-0.000 001	-0.0057
100 %		+50	1752 599 981	-9.8	-0.000 001	-0.0056
Batt. Endpoint		3.300	+20	1752 599 980	-10.6	-0.000 001

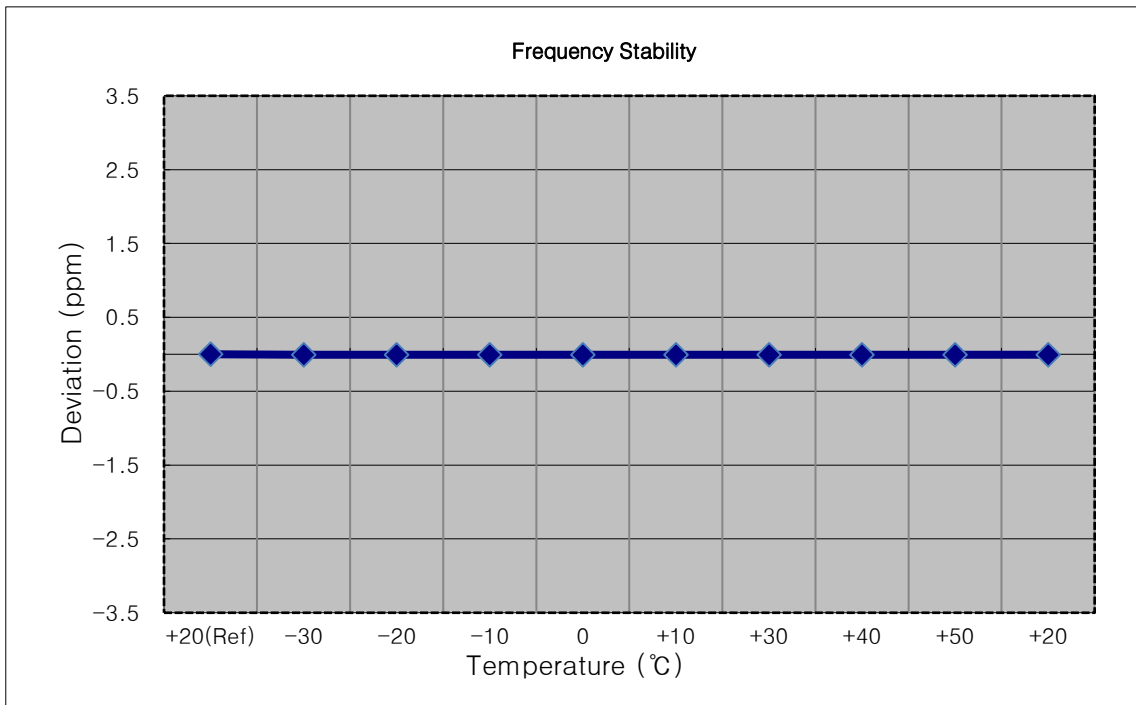

9. TEST DATA(Sub 1 Ant)

9.1 EFFECTIVE RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit W	ERP	
	channel	Freq.(MHz)							W	dBm
GSM850	128	824.2	-22.25	38.65	-10.05	1.38	H	< 7.00	0.528	27.22
	190	836.6	-21.69	39.60	-10.05	1.40	H		0.653	28.15
	251	848.8	-21.06	40.52	-10.05	1.41	H		0.805	29.06
EDGE	251	848.8	-28.11	33.47	-10.05	1.41	H		0.159	22.01

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit W	ERP	
	channel	Freq.(MHz)							W	dBm
WCDMA850	4132	826.4	-30.90	30.02	-10.05	1.39	H	< 7.00	0.072	18.58
	4183	836.6	-30.89	30.40	-10.05	1.40	H		0.079	18.95
	4233	846.6	-30.25	31.39	-10.05	1.41	H		0.098	19.93

9.2 RADIATED SPURIOUS EMISSIONS

▣ MODULATION SIGNAL: GSM850

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	<u>Ant. Gain</u> <u>(dBi)</u>	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
128 (824.2)	1 648.40	-53.11	9.58	-63.51	2.14	H	-56.07	-13.00
	2 472.60	-54.83	10.26	-59.31	2.66	V	-51.71	-13.00
	3 296.80	-57.94	12.13	-59.07	3.02	V	-49.95	-13.00
	4 121.00	-57.55	12.66	-55.31	3.42	H	-46.07	-13.00
	4 945.20	-59.30	12.62	-53.38	3.84	H	-44.60	-13.00
190 (836.6)	1 673.20	-52.43	9.69	-63.21	2.14	V	-55.66	-13.00
	2 509.80	-55.06	10.59	-59.27	2.57	V	-51.25	-13.00
	3 346.40	-58.65	12.38	-59.92	3.11	V	-50.66	-13.00
	4 183.00	-58.06	12.67	-55.99	3.36	V	-46.68	-13.00
	5 019.60	-59.00	12.52	-52.74	3.91	V	-44.13	-13.00
251 (848.8)	1 697.60	-53.53	9.88	-63.17	2.23	H	-55.52	-13.00
	2 546.40	-55.08	10.67	-58.36	2.64	H	-50.33	-13.00
	3 395.20	-58.00	12.50	-59.40	3.01	H	-49.91	-13.00
	4 244.00	-58.76	12.63	-56.15	3.54	V	-47.07	-13.00
	5 092.80	-58.37	12.22	-51.28	3.71	V	-42.77	-13.00

▣ MODULATION SIGNAL: WCDMA850

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	<u>Ant. Gain</u> <u>(dBi)</u>	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	<u>Result</u> <u>(dBm)</u>	<u>Limit</u>
4 132 (826.4)	1 652.80	-52.83	9.58	-63.23	2.14	V	-55.79	-13.00
	2 479.20	-54.96	10.34	-59.44	2.62	H	-51.72	-13.00
	3 305.60	-57.83	12.19	-59.02	3.02	H	-49.86	-13.00
	4 132.00	-57.55	12.67	-55.94	3.51	H	-46.78	-13.00
	4 958.40	-58.21	12.60	-52.09	3.72	H	-43.21	-13.00
4 183 (836.6)	1 673.20	-52.18	9.69	-62.96	2.14	V	-55.41	-13.00
	2 509.80	-55.16	10.59	-59.37	2.57	V	-51.35	-13.00
	3 346.40	-57.07	12.38	-58.34	3.11	H	-49.08	-13.00
	4 183.00	-57.24	12.67	-55.17	3.36	V	-45.86	-13.00
	5 019.60	-57.83	12.52	-51.57	3.91	H	-42.96	-13.00
4 233 (846.6)	1 693.20	-52.10	9.82	-62.36	2.18	H	-54.72	-13.00
	2 539.80	-55.24	10.67	-58.56	2.63	V	-50.52	-13.00
	3 386.40	-57.82	12.53	-58.95	3.05	V	-49.47	-13.00
	4 233.00	-58.12	12.63	-55.37	3.51	H	-46.25	-13.00
	5 079.60	-58.55	12.26	-51.75	3.70	V	-43.19	-13.00

9.3 PEAK-TO-AVERAGE RATIO

Band	Ch.	Measured P _{Pk} (dBm)	Measured P _{Avg} (dBm)	P _{Avg} (Duty Cycle)			P.A.R. = P _{Pk} - P _{Avg} (dB)	Limit (dB)	Pass / Fail
				T _{XTotal} (ms)	T _{XOn} (ms)	Factor (dB)			
GSM850	190	CCDF Procedure					3.02	13	Pass
GSM850 EDGE	190						5.95		
WCDMA850	4408						2.84		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 151 ~ 153.
2. Only GSM(include EDGE) Mode was tested by alternate procedure for PAPR

$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm)$ (P_{Avg} = Average Power + Duty cycle Factor)

Duty cycle Factor = $10 \times \log (1/X)$, $X = T_{XOn} / T_{XTotal}$

9.4 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	244.28
	190	836.60	247.79
	251	848.80	243.57
GSM850 EDGE	128	824.20	242.03
	190	836.60	242.86
	251	848.80	248.11
WCDMA850	4132	826.40	4.1494
	4183	836.60	4.1659
	4233	846.60	4.1660

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 144 ~ 150.

9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result	(dBm)
GSM850	128	5.6865	28.591	-57.97	-29.376	-13.00
	190	5.5948	28.591	-58.12	-29.531	
	251	3.1267	27.976	-57.50	-29.526	
WCDMA850	4132	2.4831	27.976	-75.684	-47.708	
	4183	2.5135	27.976	-75.638	-47.662	
	4233	2.5375	27.976	-75.923	-47.947	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 170 ~ 175.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


9.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 154 ~ 169.

9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: GSM850
- ▣ OPERATING FREQUENCY: 836,600,000 Hz
- ▣ CHANNEL: 190
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 600 012	0.0	0.000 000	0.0000
100 %		-30	836 600 024	12.2	0.000 001	0.0146
100 %		-20	836 600 024	12.2	0.000 001	0.0146
100 %		-10	836 600 023	10.9	0.000 001	0.0131
100 %		0	836 600 023	10.7	0.000 001	0.0128
100 %		+10	836 600 022	10.4	0.000 001	0.0124
100 %		+30	836 600 022	9.8	0.000 001	0.0117
100 %		+40	836 600 021	9.1	0.000 001	0.0109
100 %		+50	836 600 023	10.5	0.000 001	0.0125
Batt. Endpoint		3.300	+20	836 600 022	9.9	0.000 001

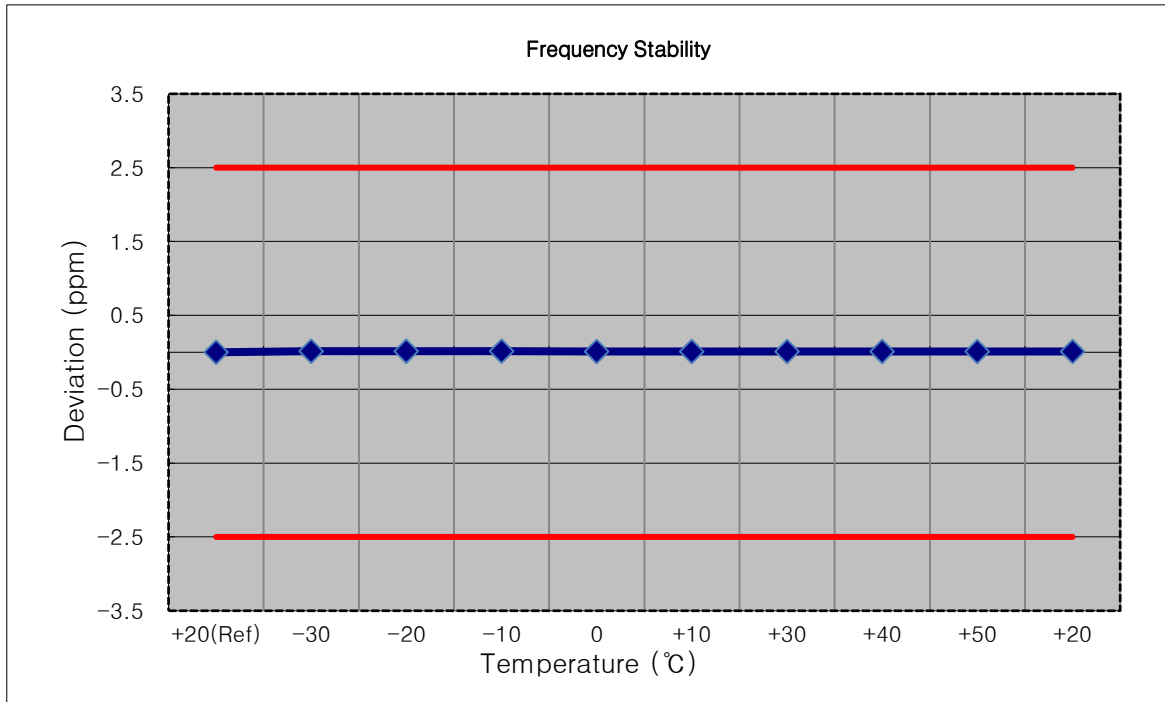


- ▣ Mode: WCDMA850
- ▣ OPERATING FREQUENCY: 836,600,000 Hz
- ▣ CHANNEL: 4183
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 600 001	0.0	0.000 000	0.0000
100 %		-30	836 600 001	-0.6	0.000 000	-0.0007
100 %		-20	836 600 003	1.2	0.000 000	0.0015
100 %		-10	836 600 003	1.4	0.000 000	0.0017
100 %		0	836 600 002	1.2	0.000 000	0.0014
100 %		+10	836 600 002	0.9	0.000 000	0.0011
100 %		+30	836 600 003	1.5	0.000 000	0.0018
100 %		+40	836 600 003	1.9	0.000 000	0.0023
100 %		+50	836 600 003	1.5	0.000 000	0.0018
Batt. Endpoint		3.300	+20	836 600 000	-1.4	0.000 000

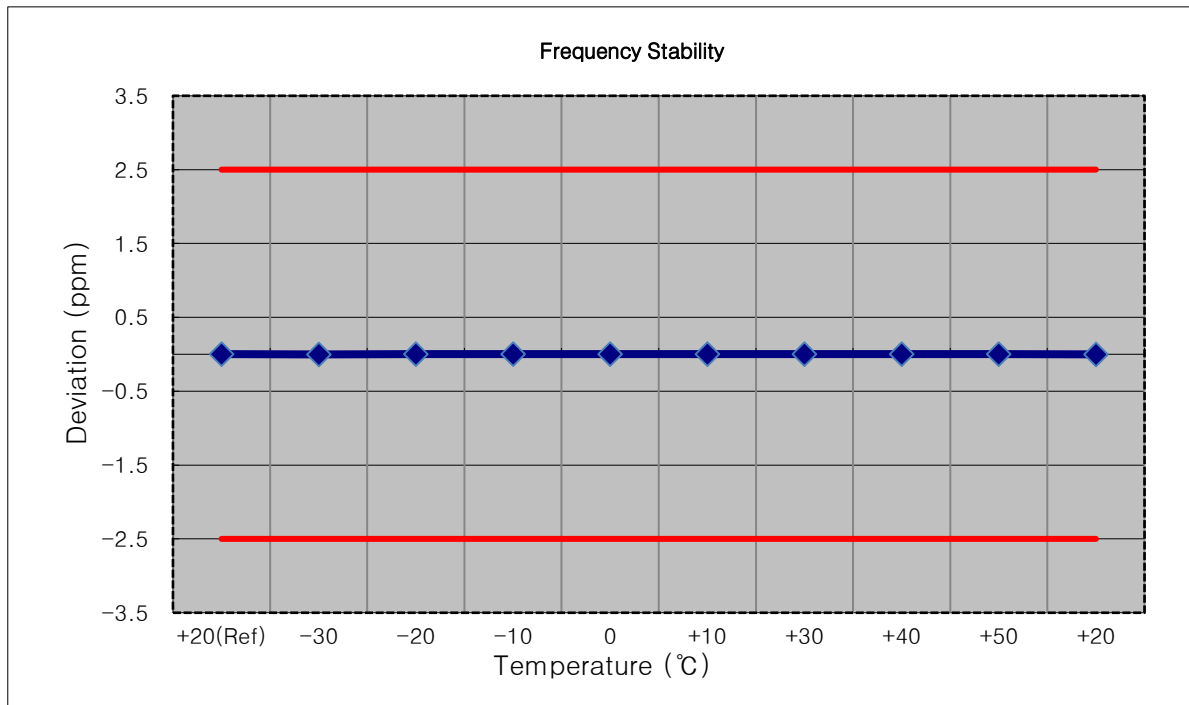


10. TEST PLOTS(Main 1 Ant)


■ GSM850 MODE (128 CH.) Occupied Bandwidth

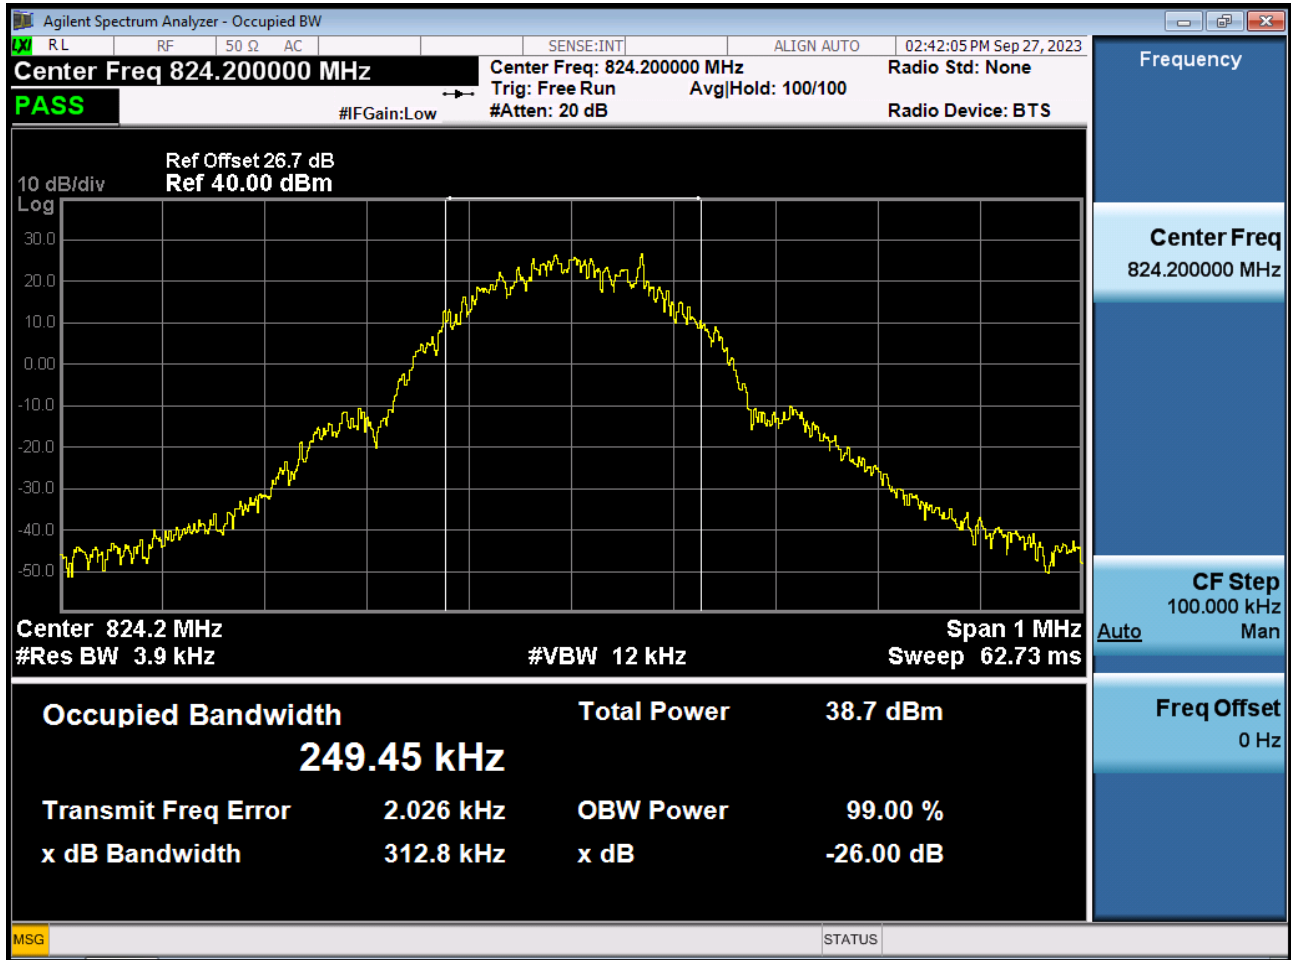


■ GSM850 MODE (190 CH.) Occupied Bandwidth

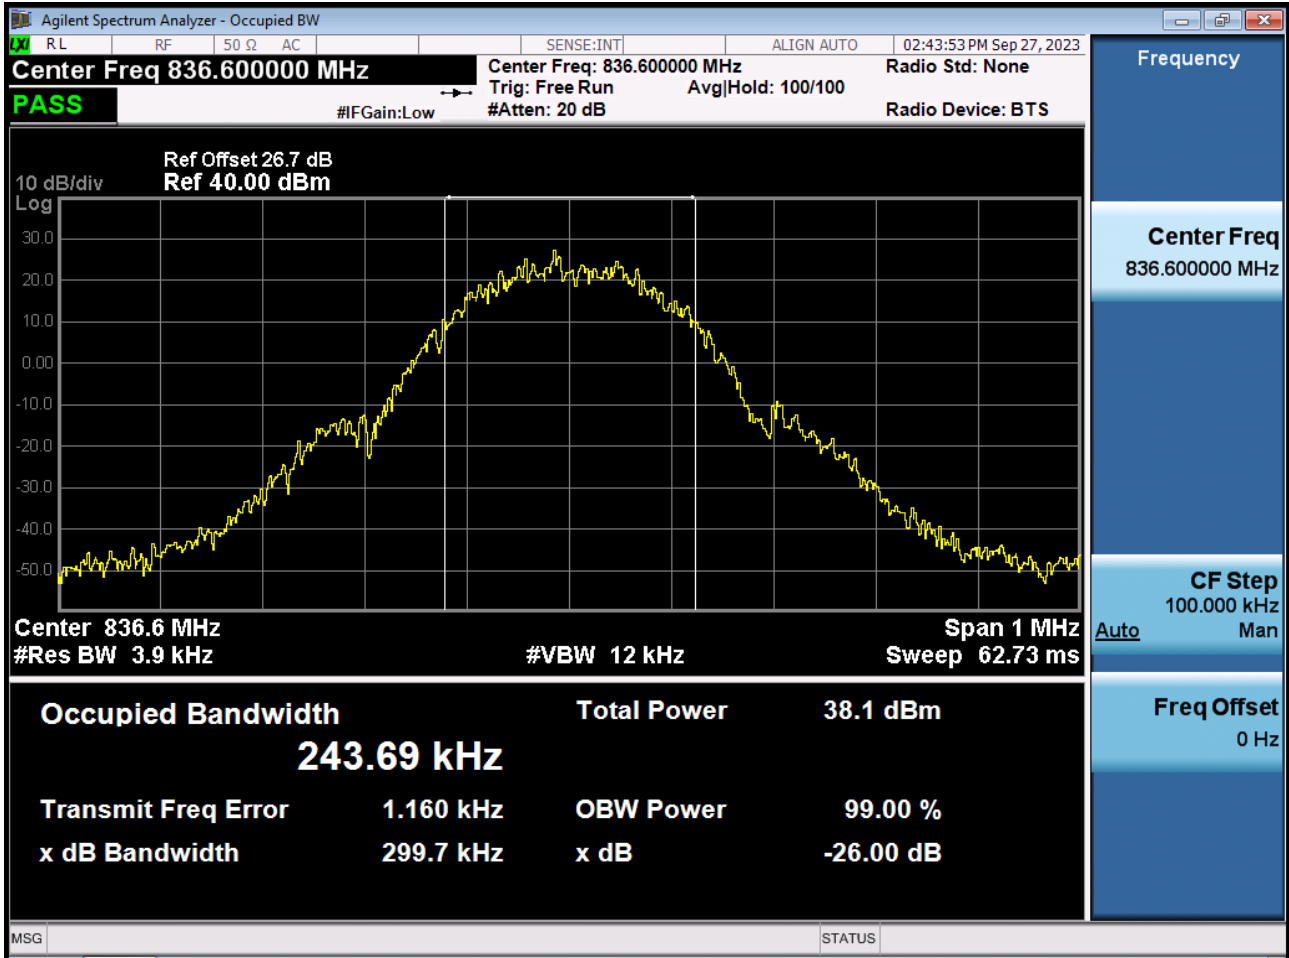


■ GSM850 MODE (251 CH.) Occupied Bandwidth

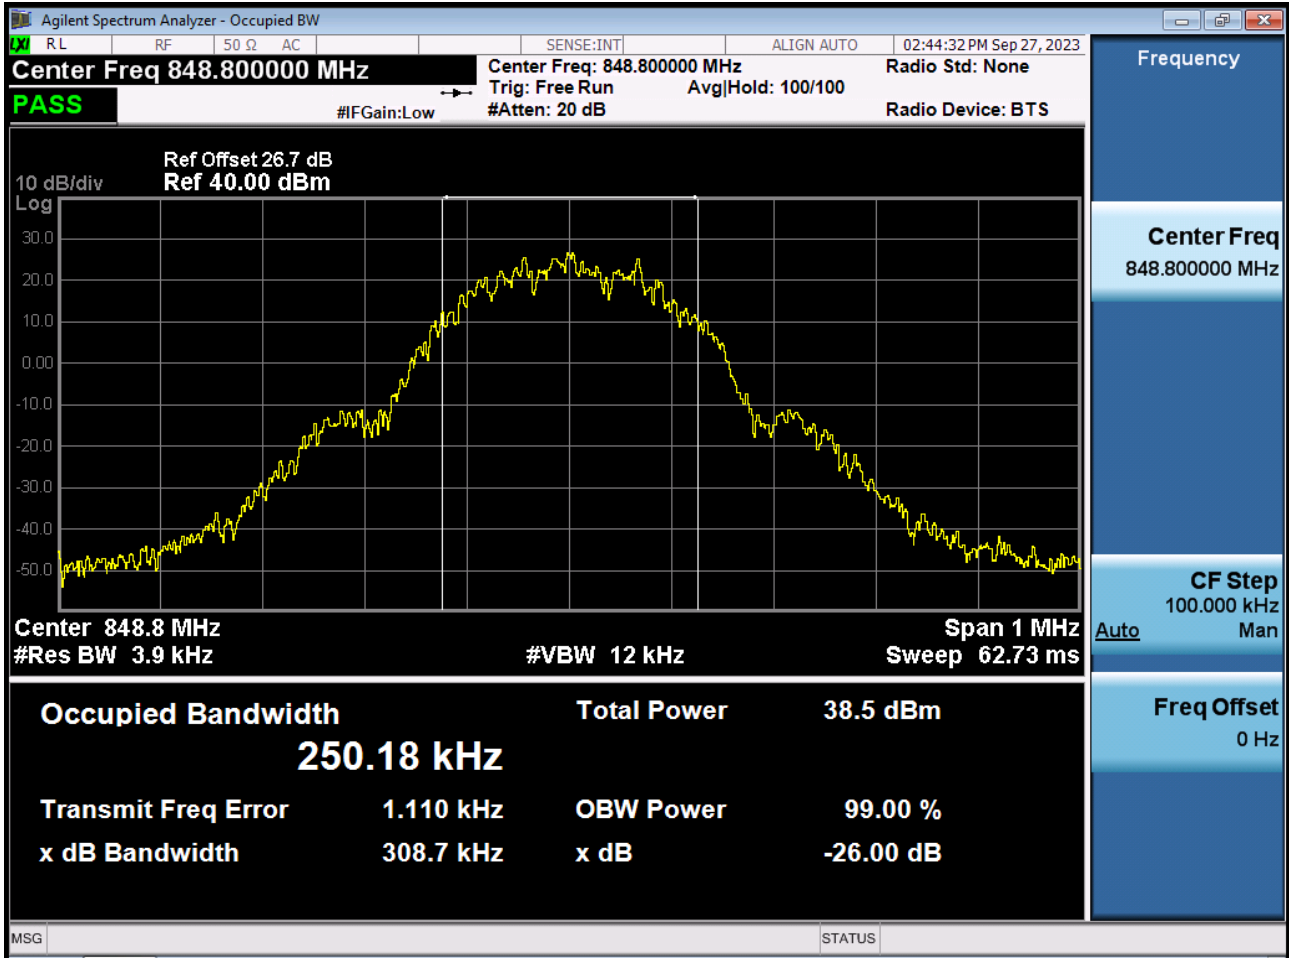


■ GSM850 EDGE (190 CH.) Occupied Bandwidth

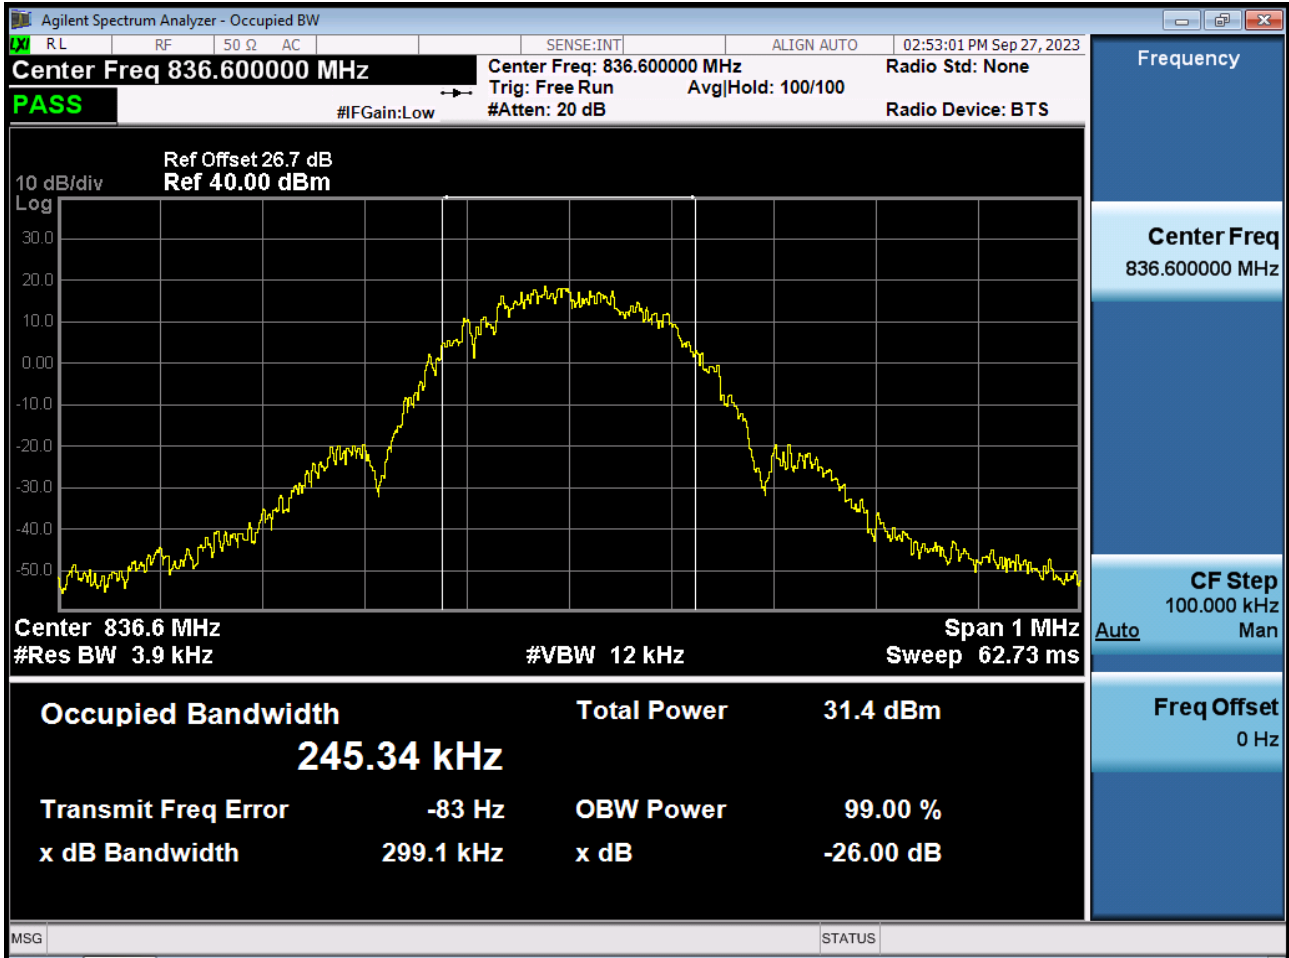


■ GSM1900 MODE (512 CH.) Occupied Bandwidth

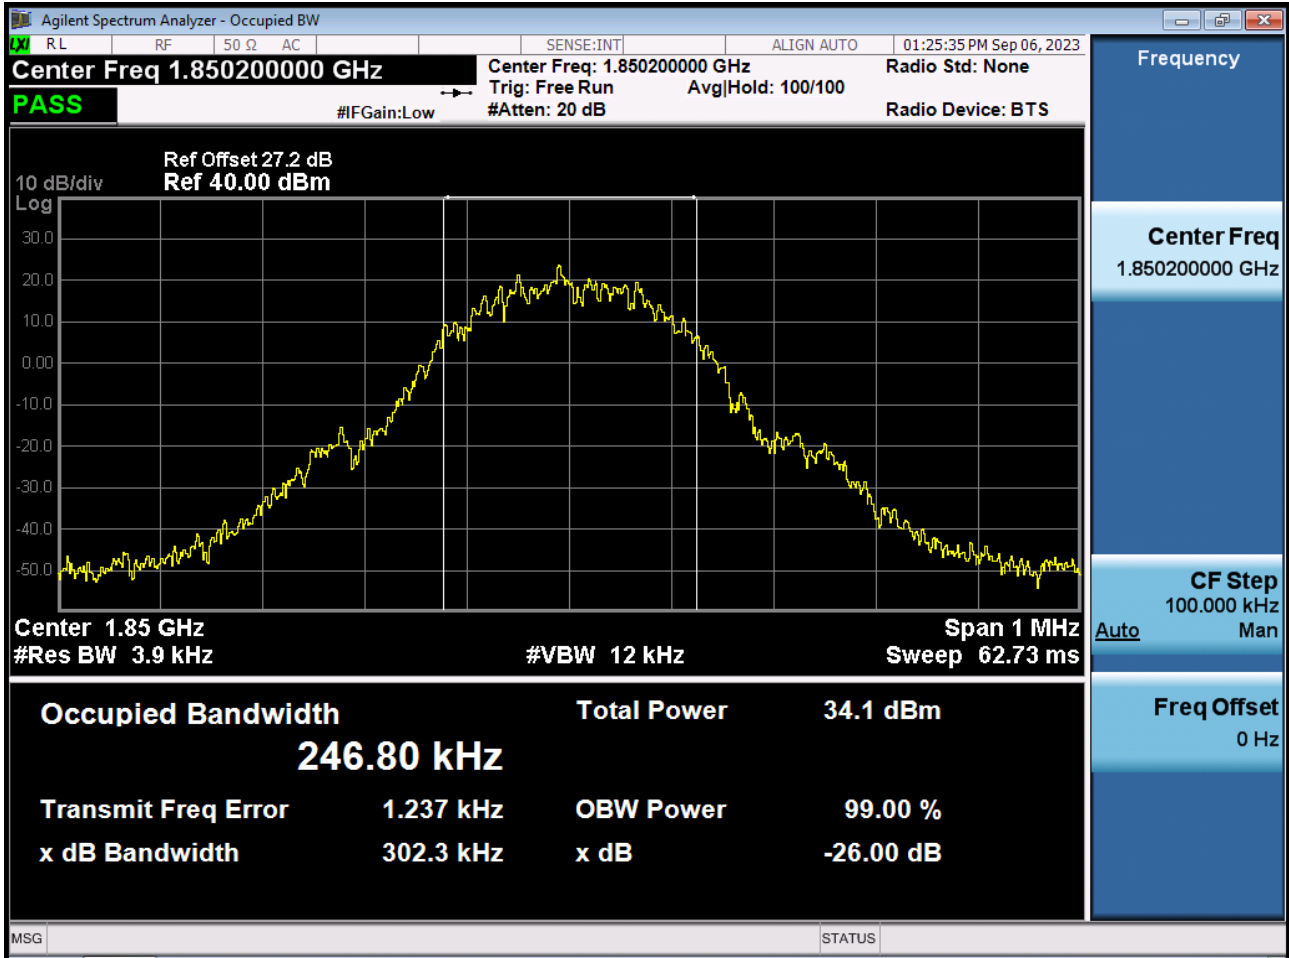


■ GSM1900 MODE (661 CH.) Occupied Bandwidth

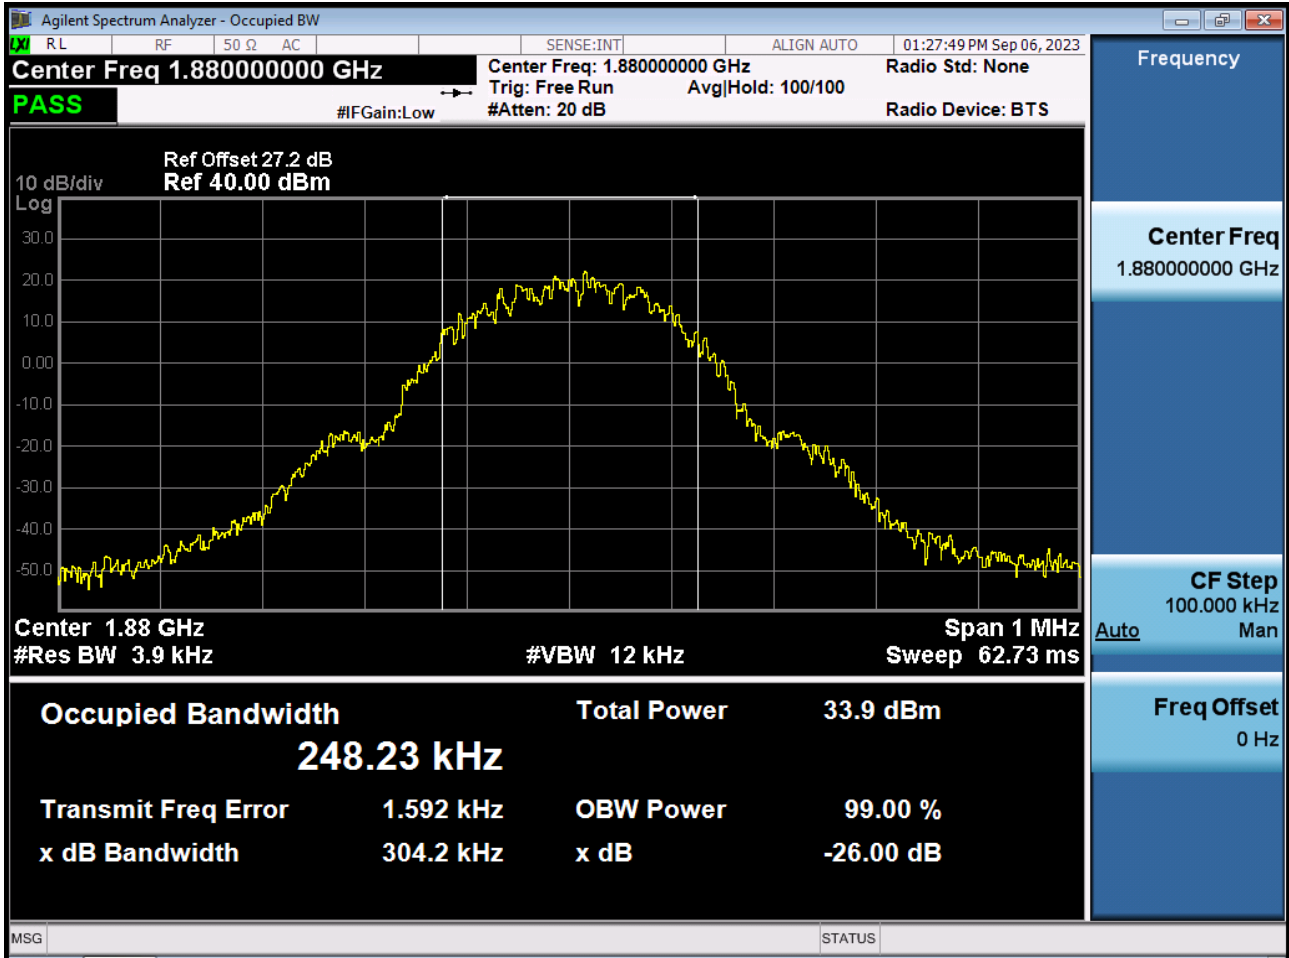


■ GSM1900 MODE (810 CH.) Occupied Bandwidth

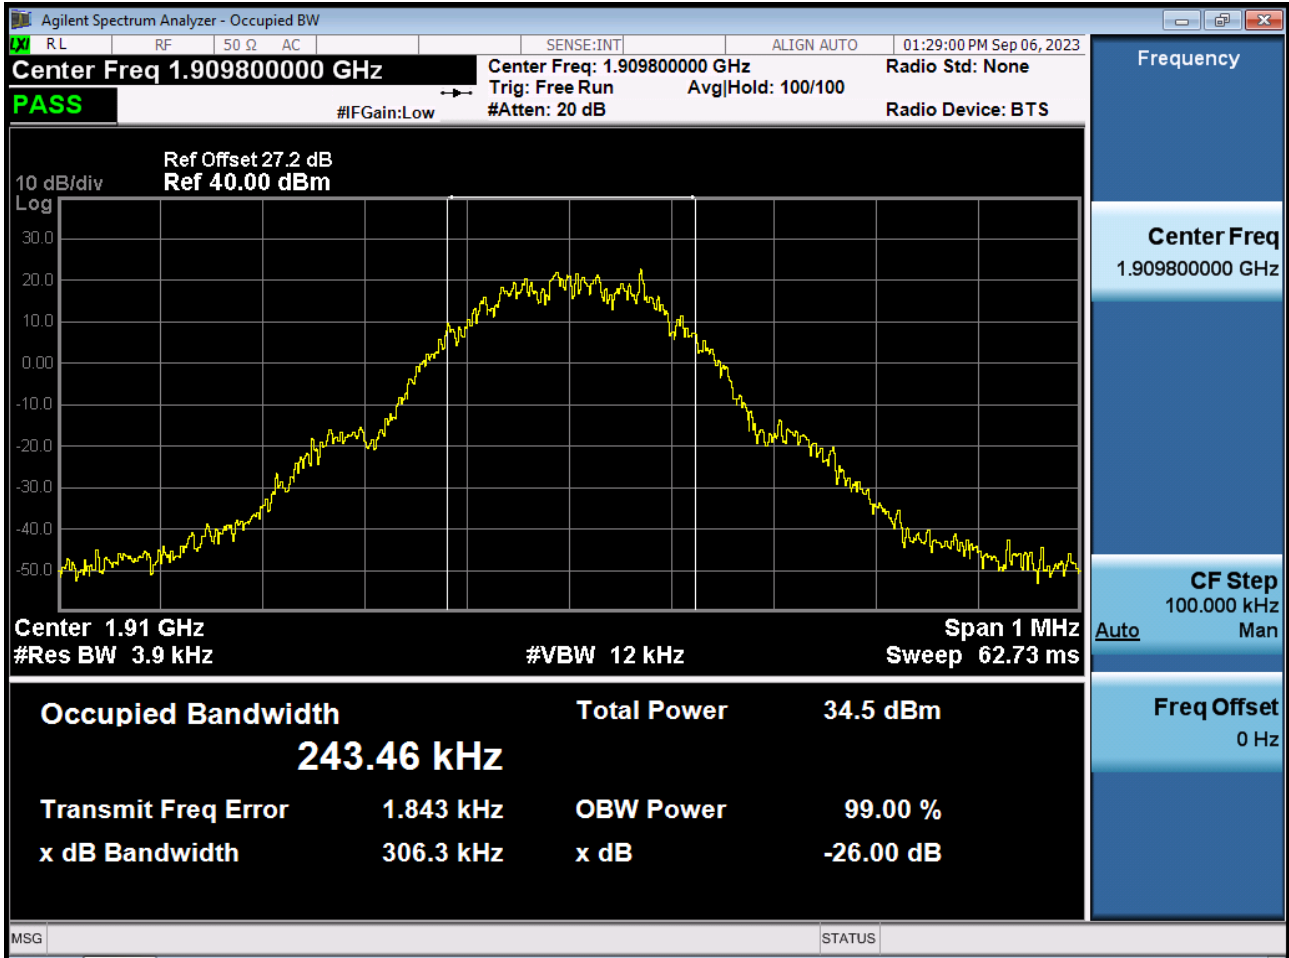


■ GSM1900 EDGE (512 CH.) Occupied Bandwidth

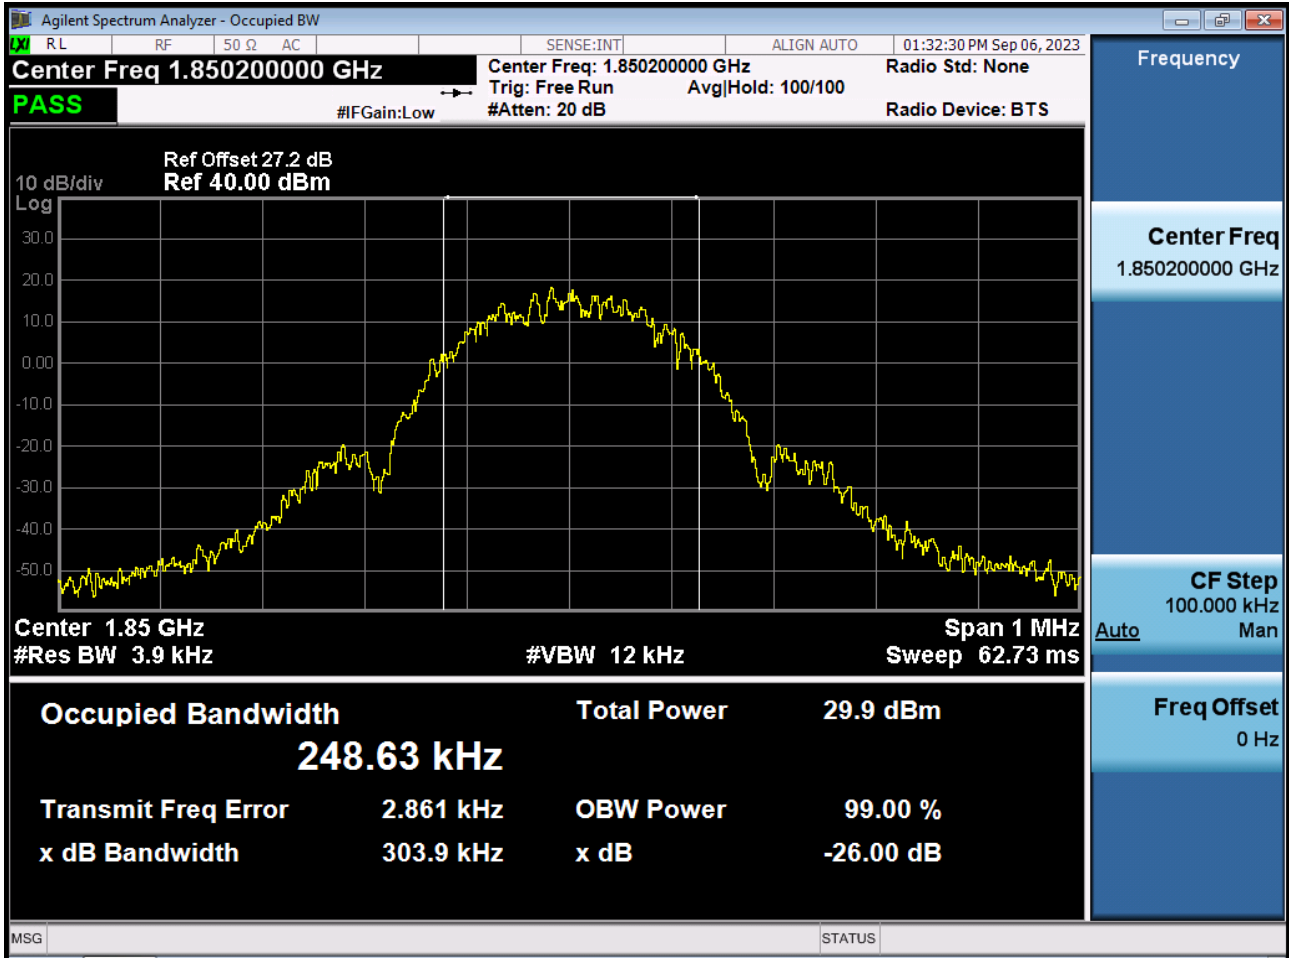


■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

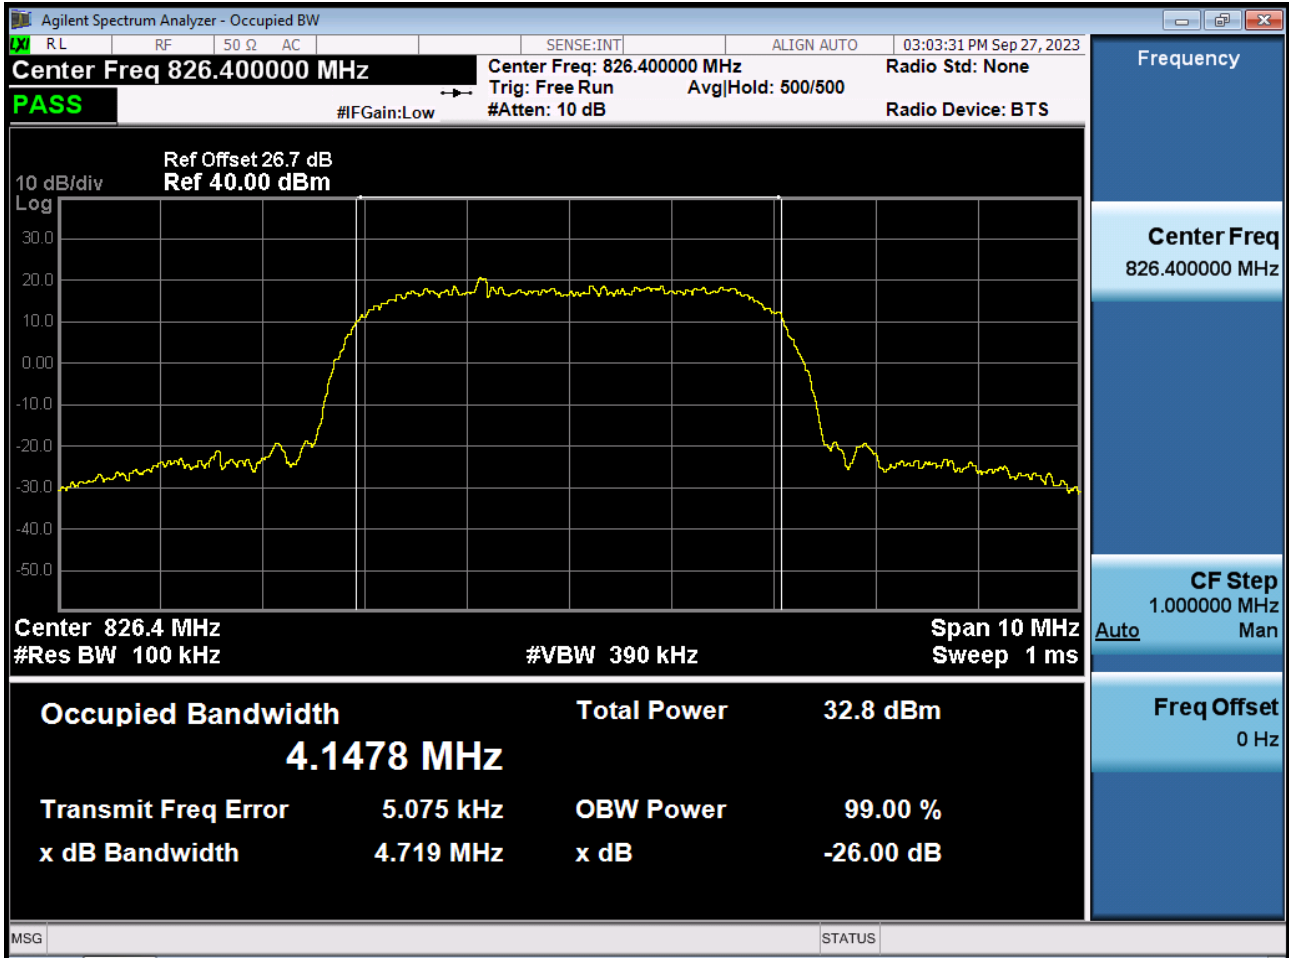


■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

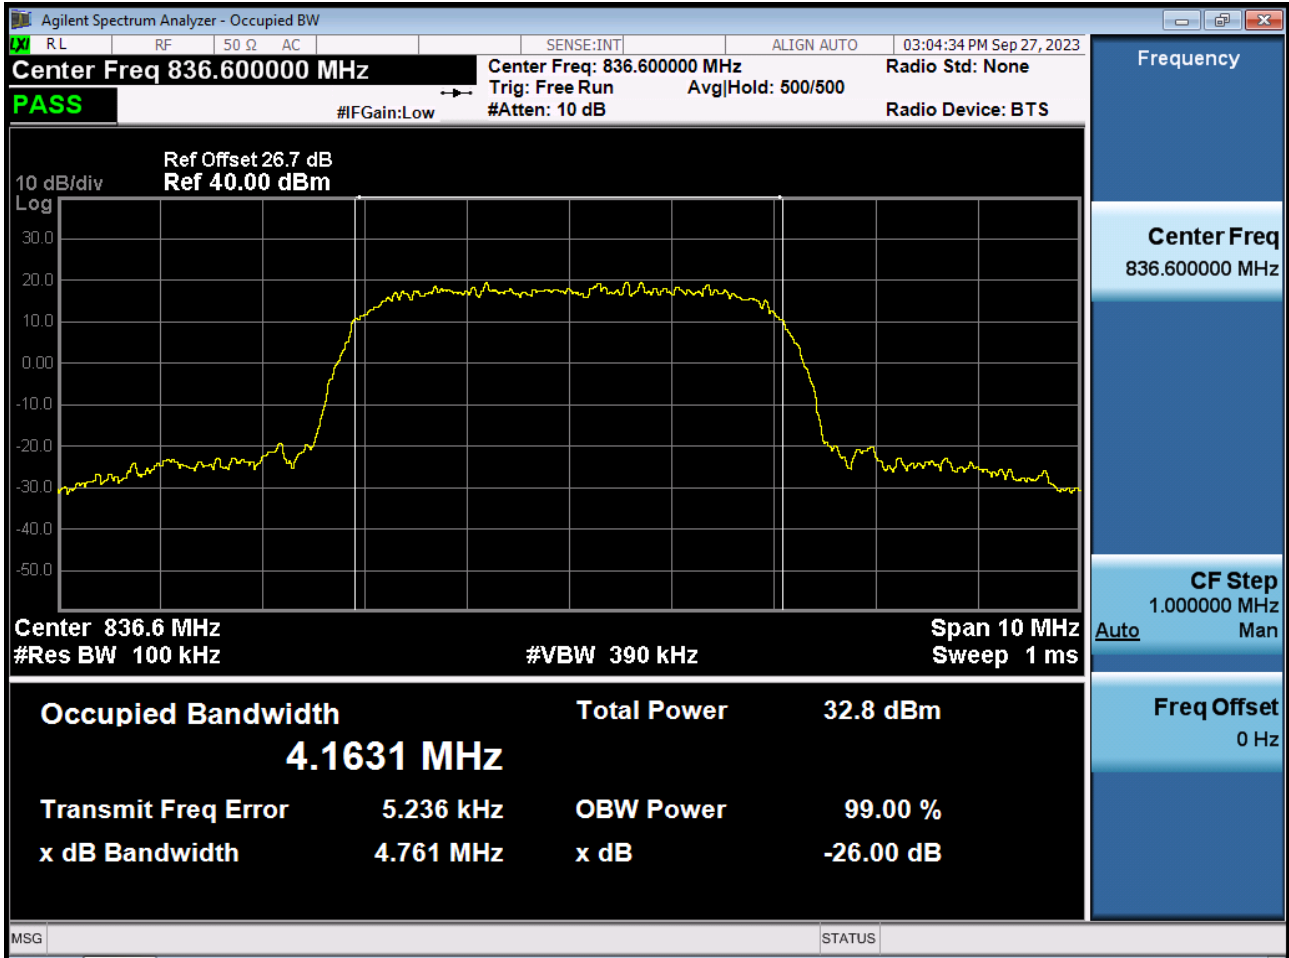


■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

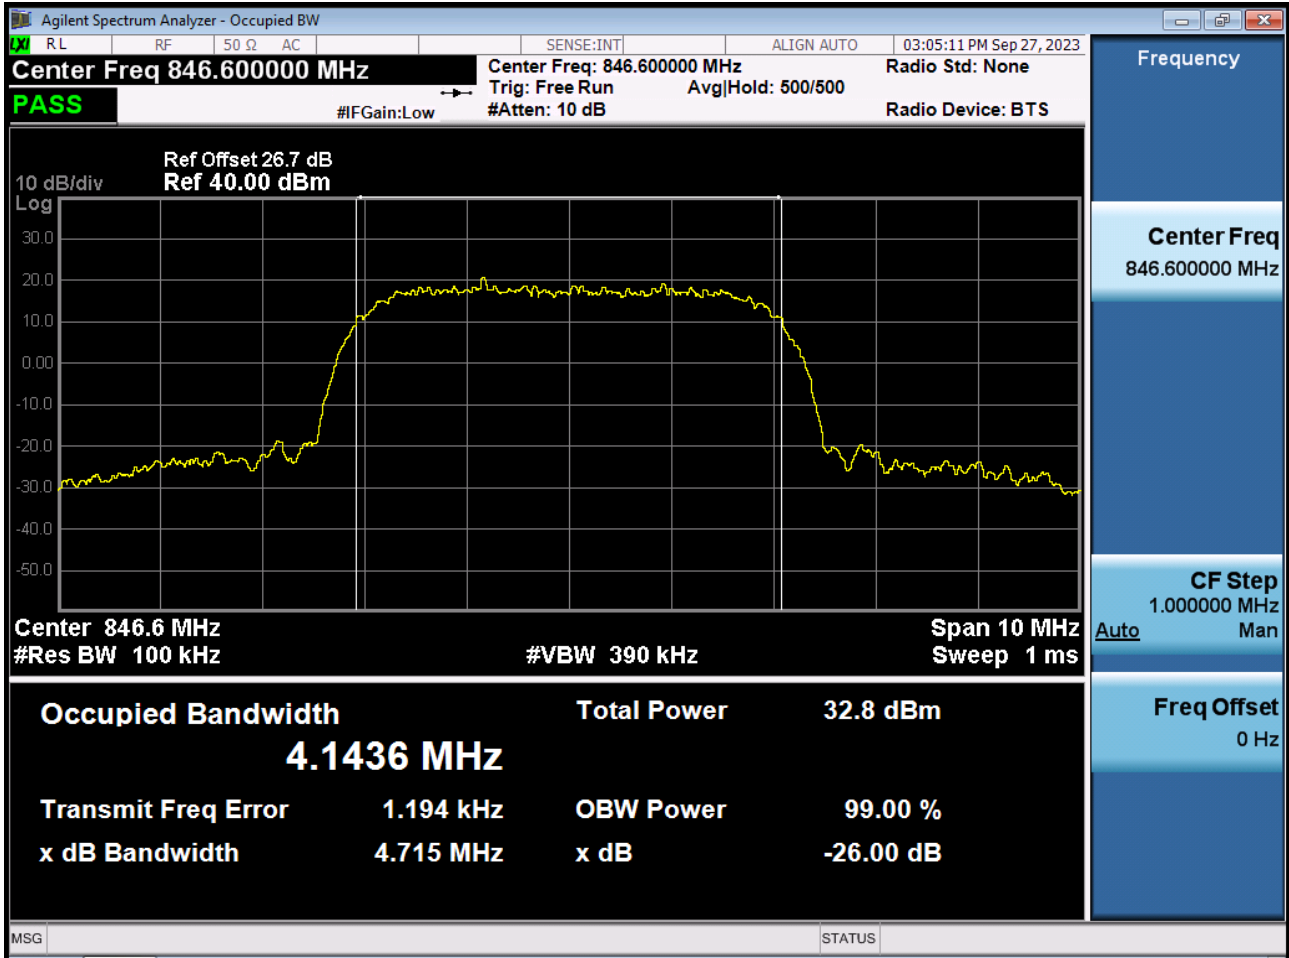


■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

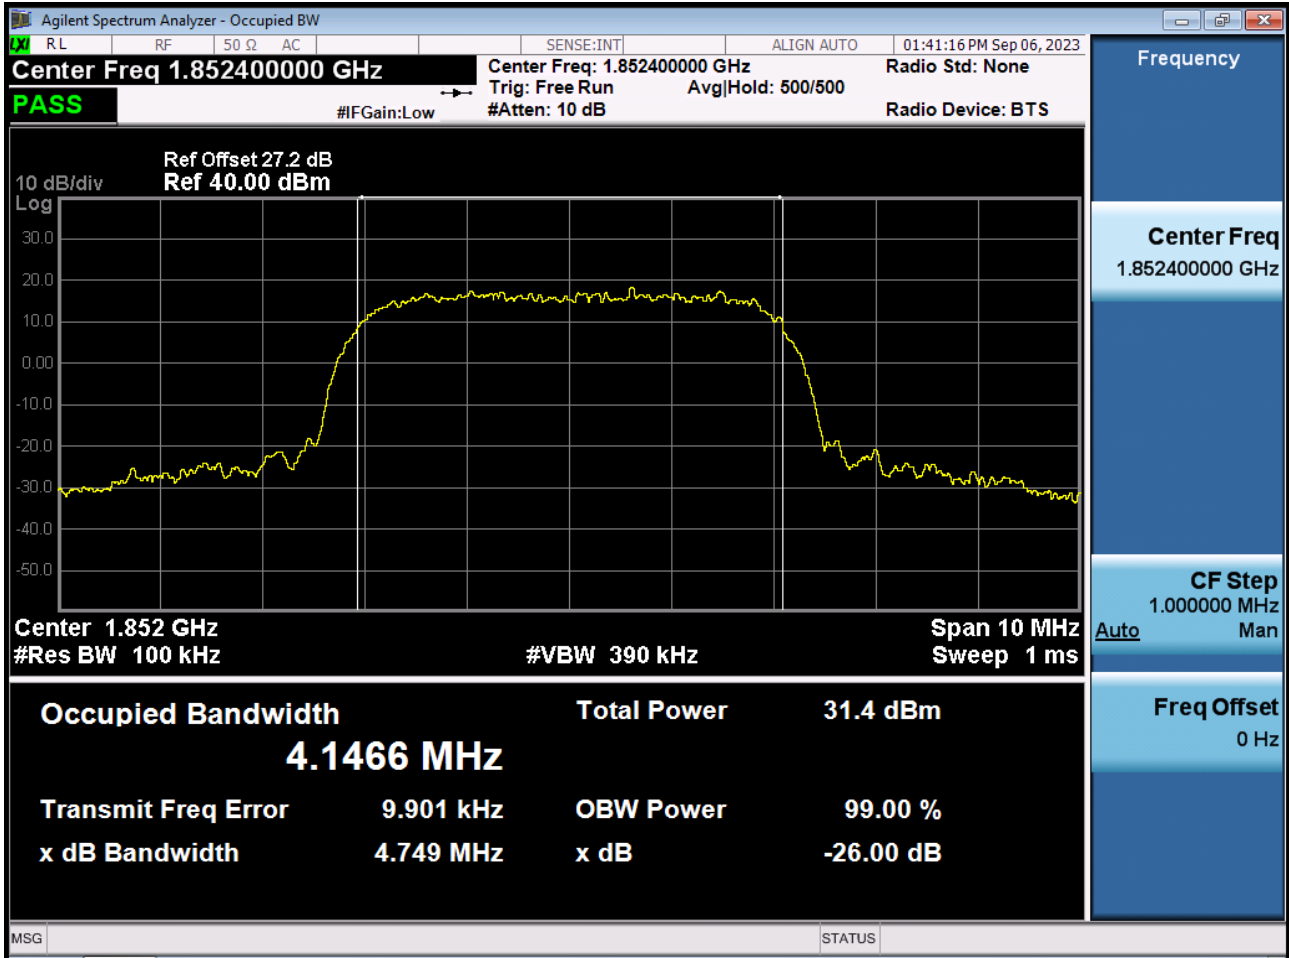


■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

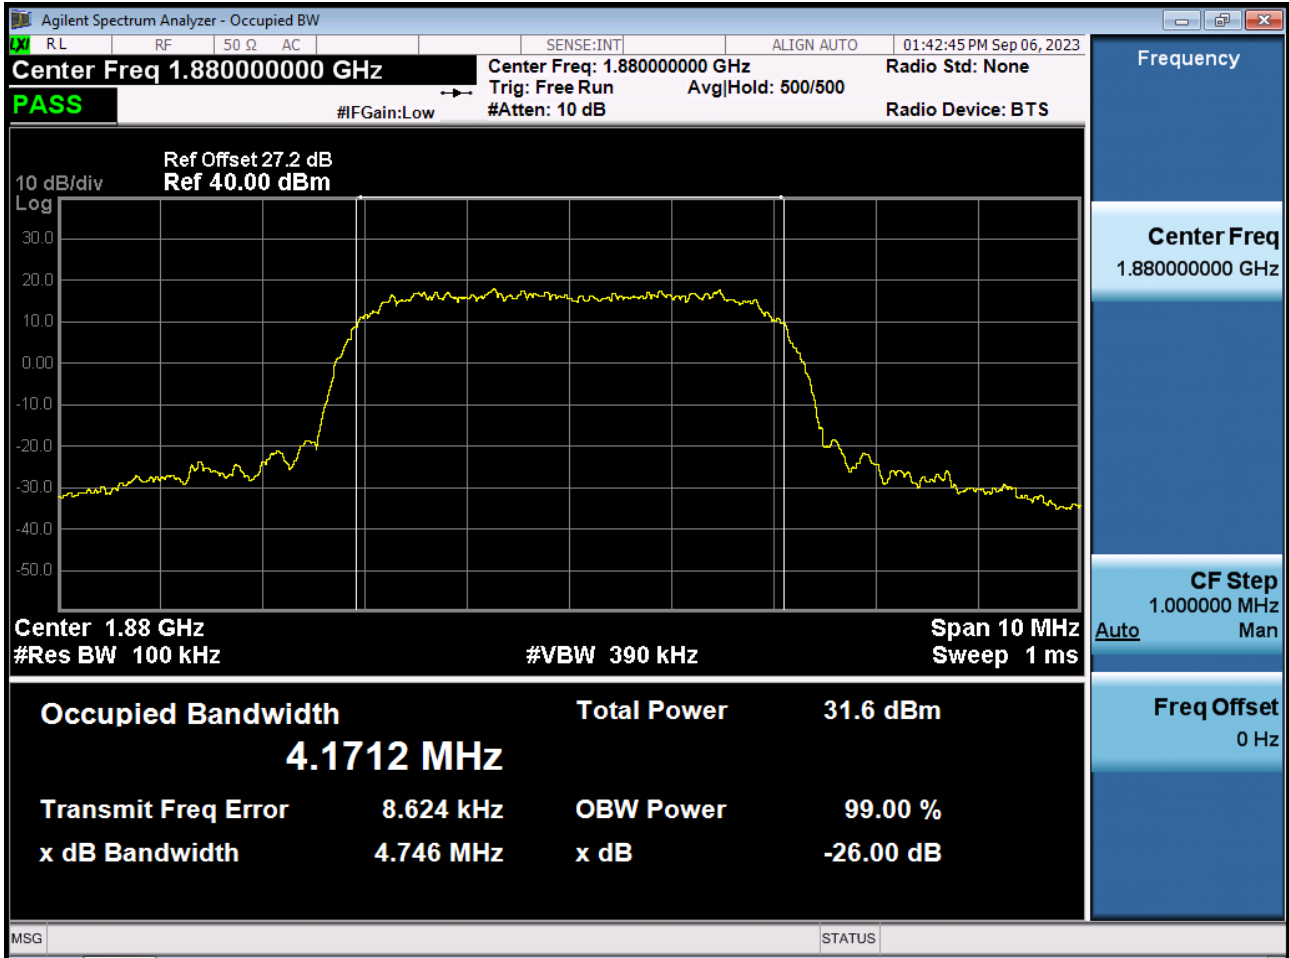


■ WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

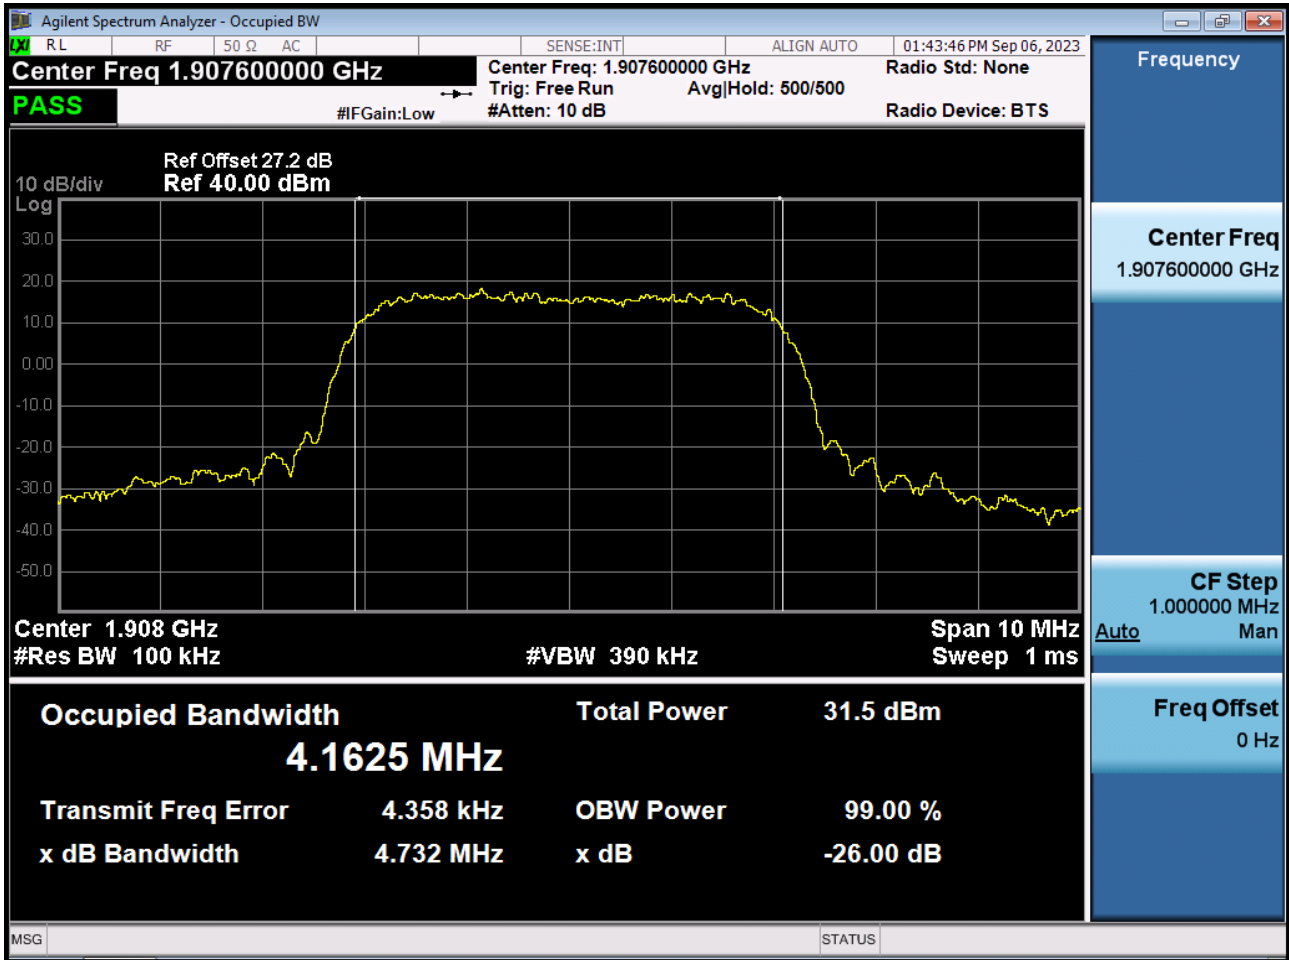


■ WCDMA1700 MODE (1312 CH.) Occupied Bandwidth

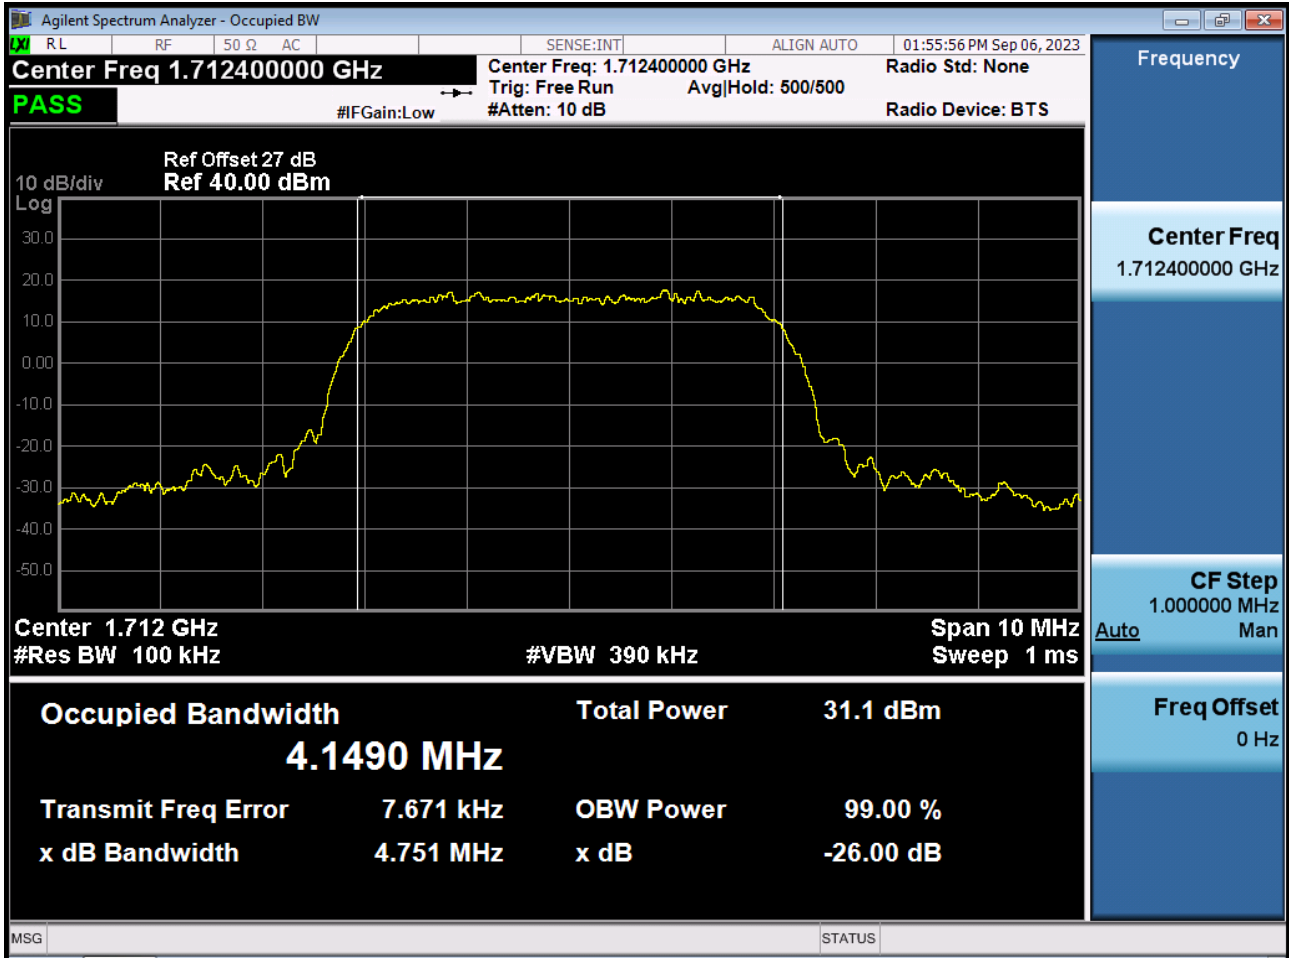


■ WCDMA1700 MODE (1412 CH.) Occupied Bandwidth

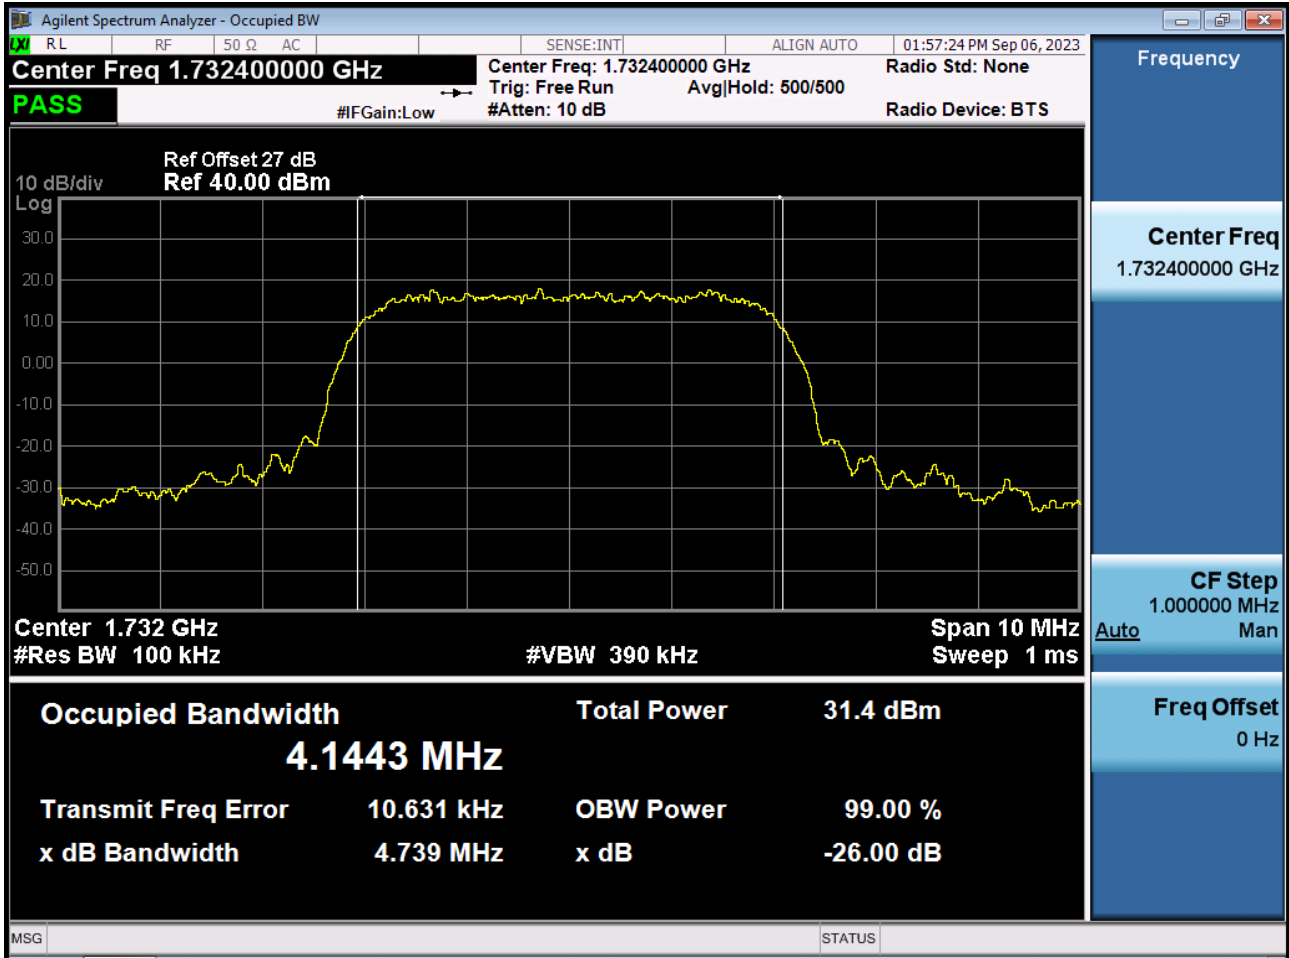


■ WCDMA1700 MODE (1513 CH.) Occupied Bandwidth

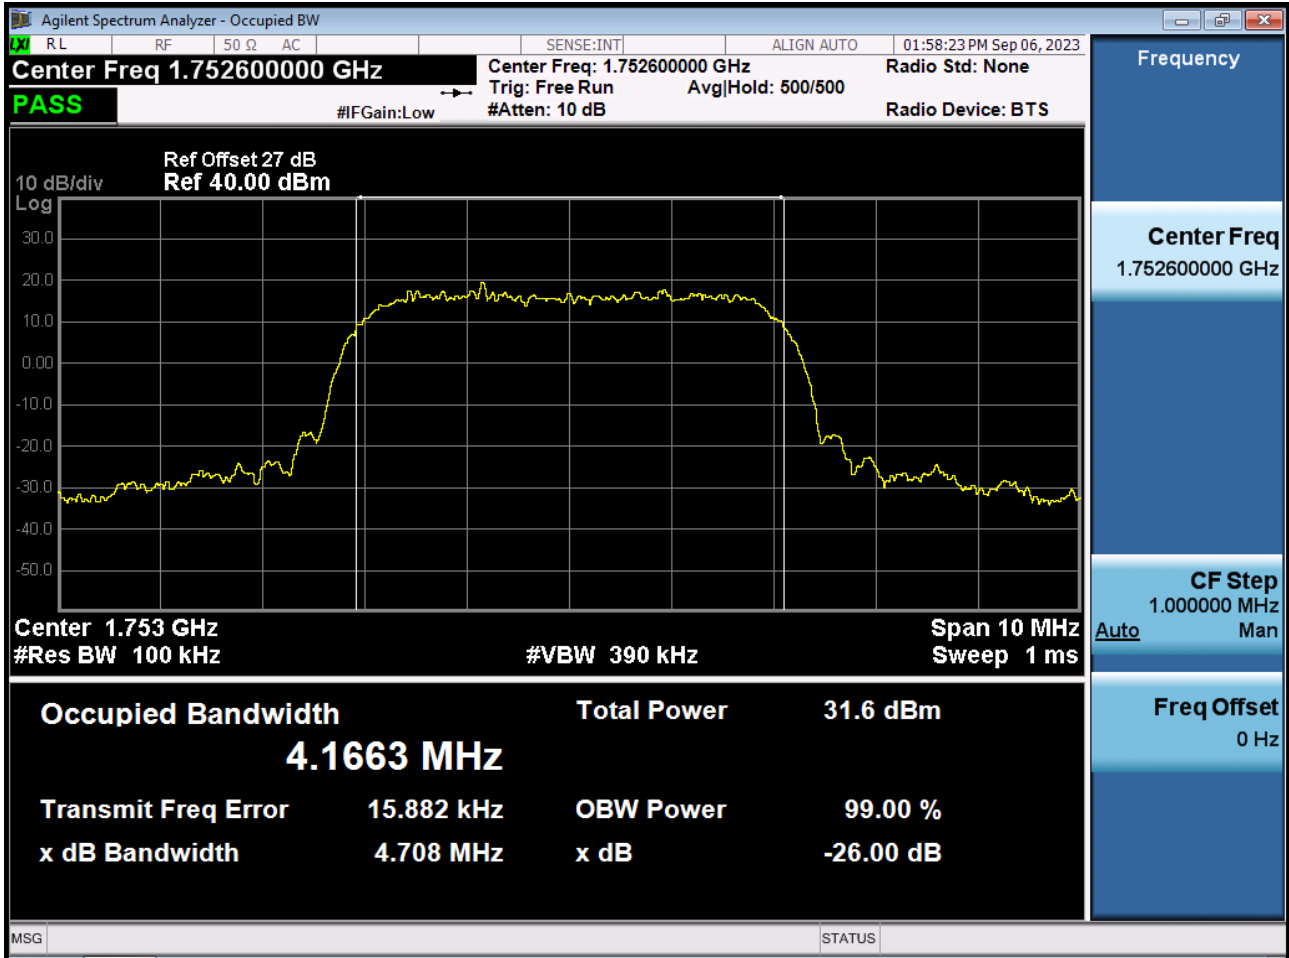


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{PK}

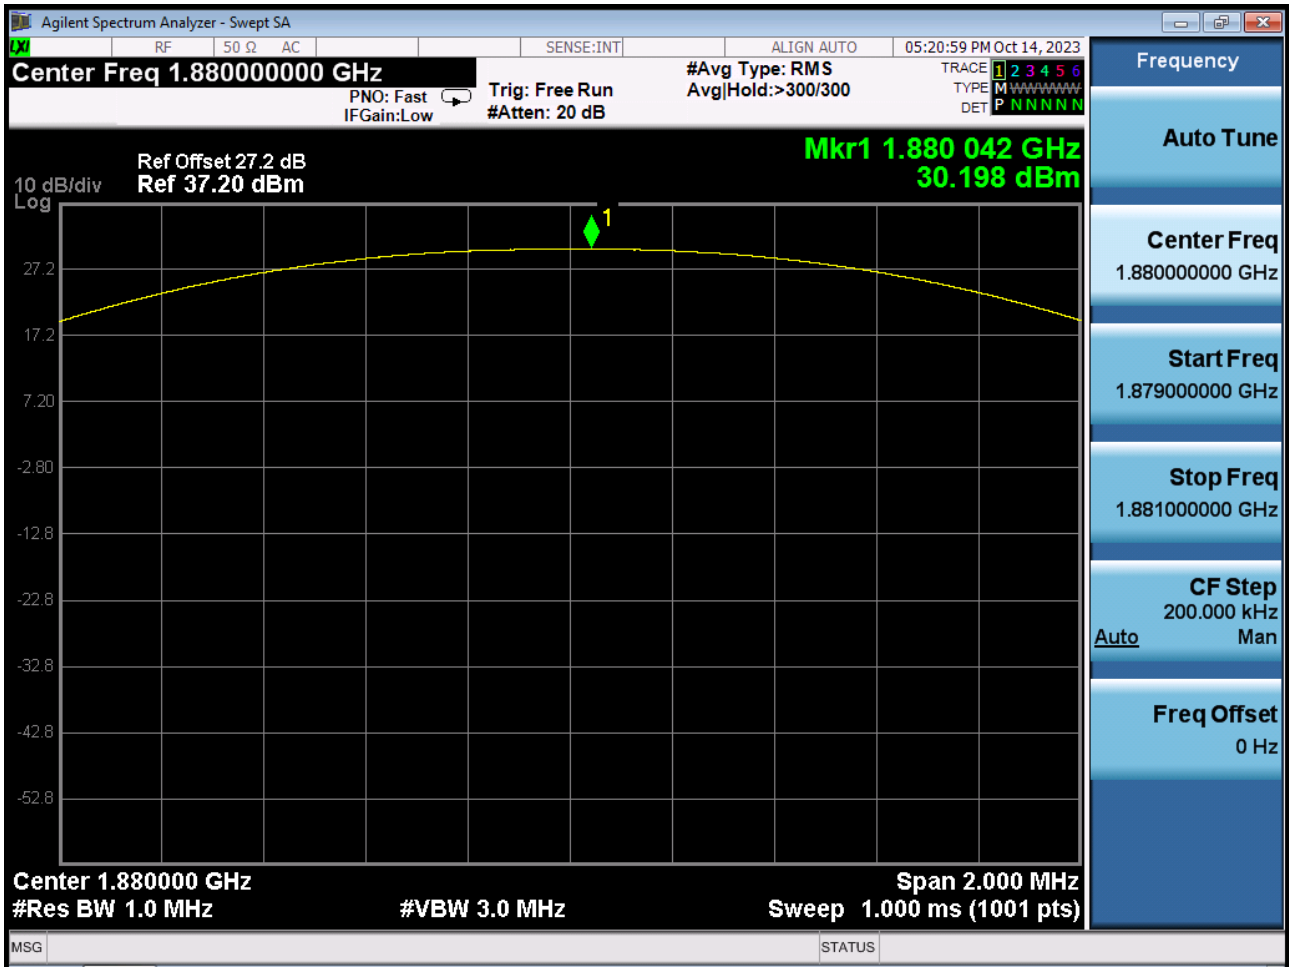


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Avg}

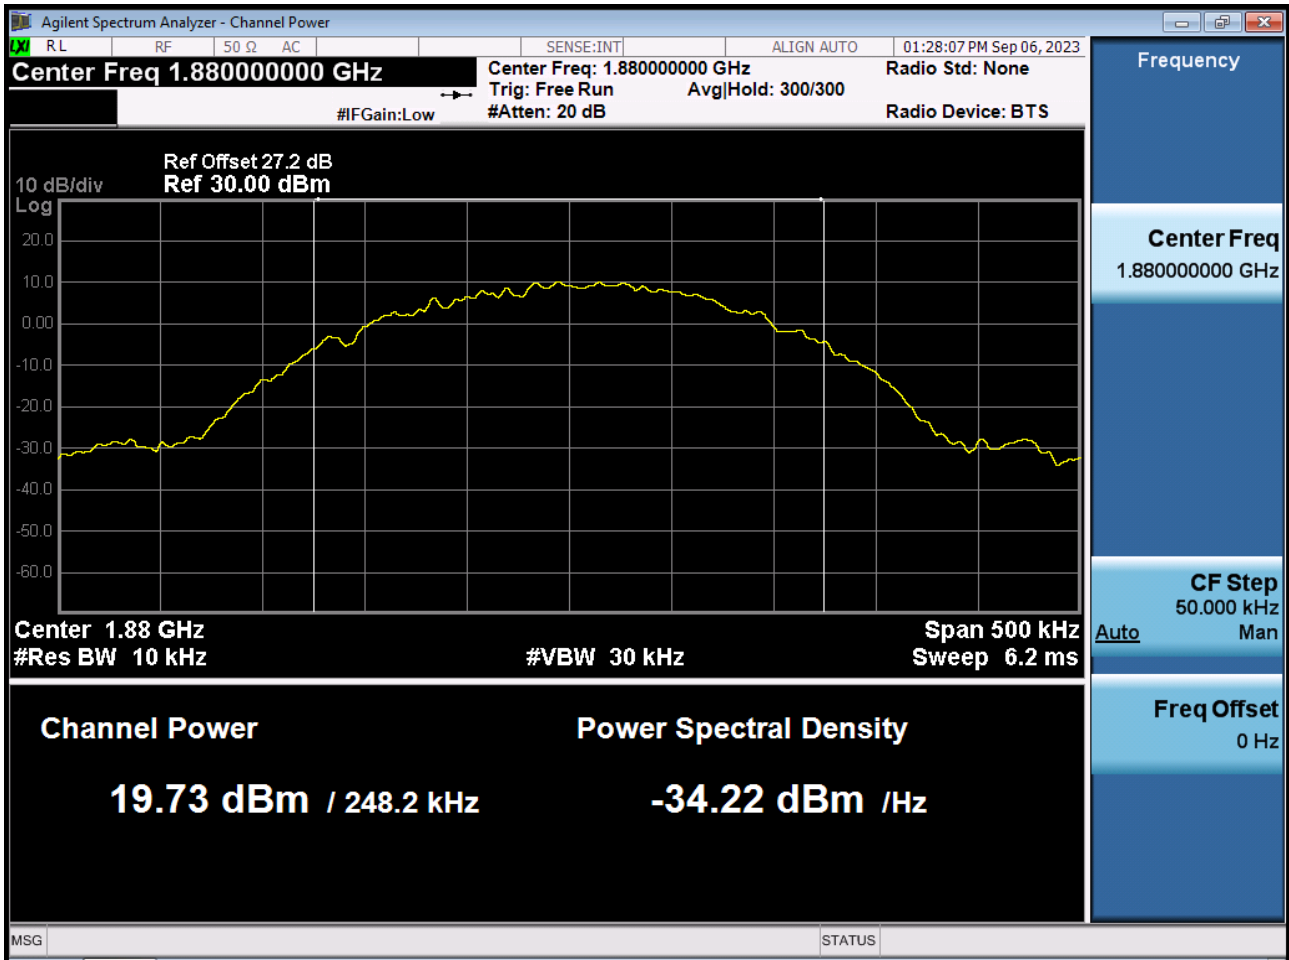


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio Duty

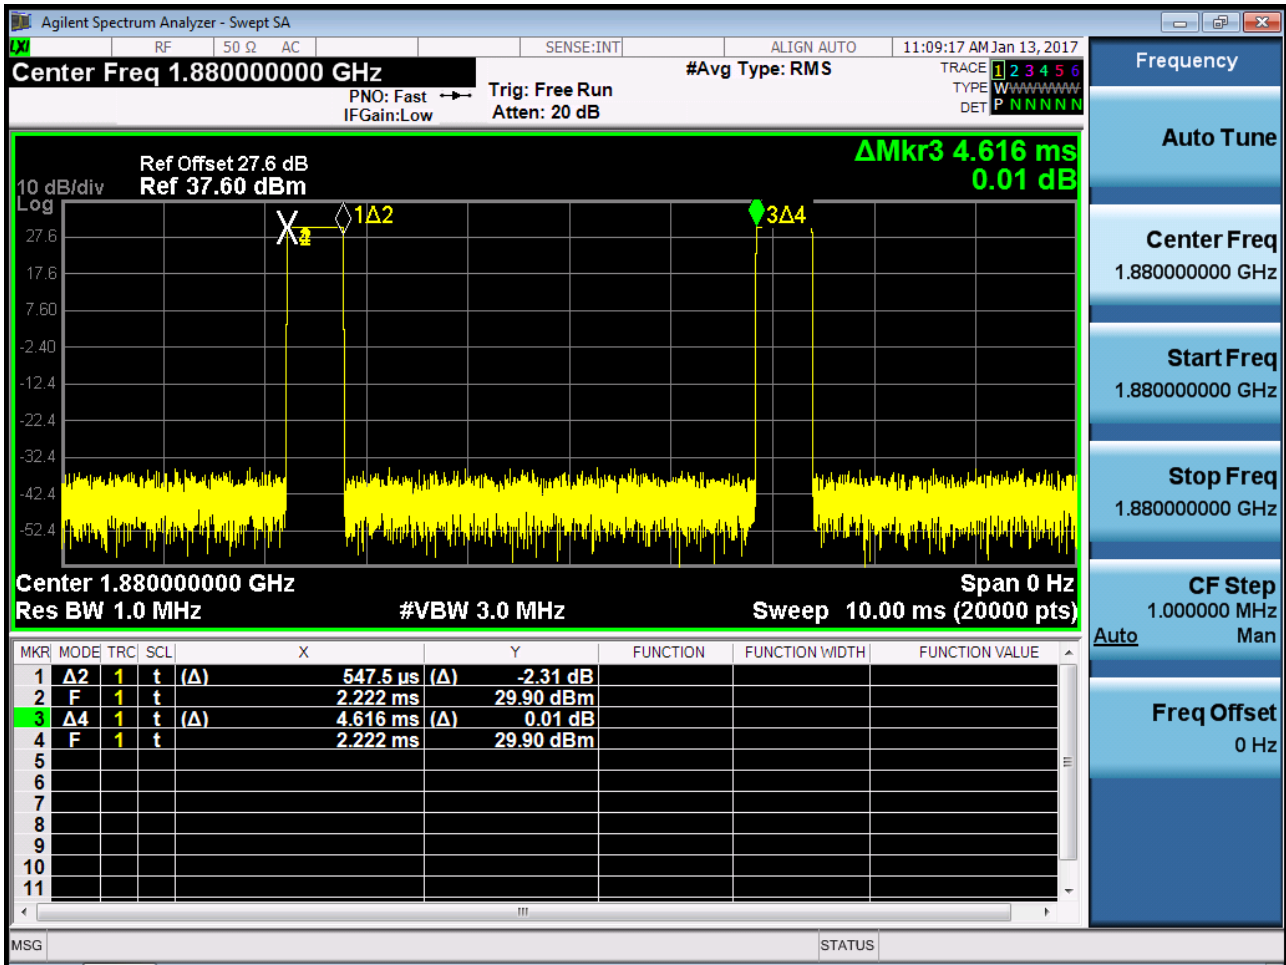


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio Duty

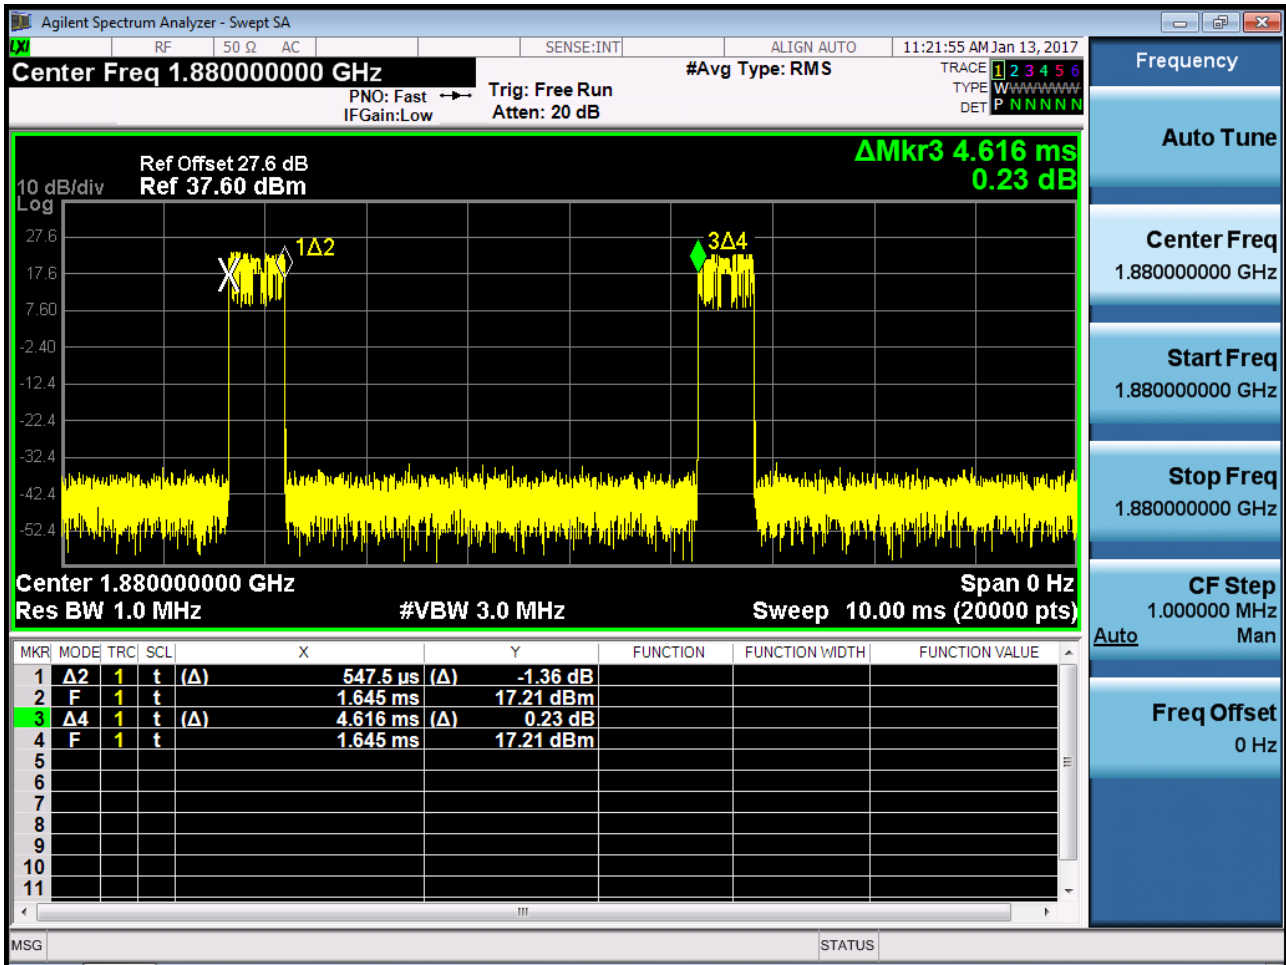


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{pk}

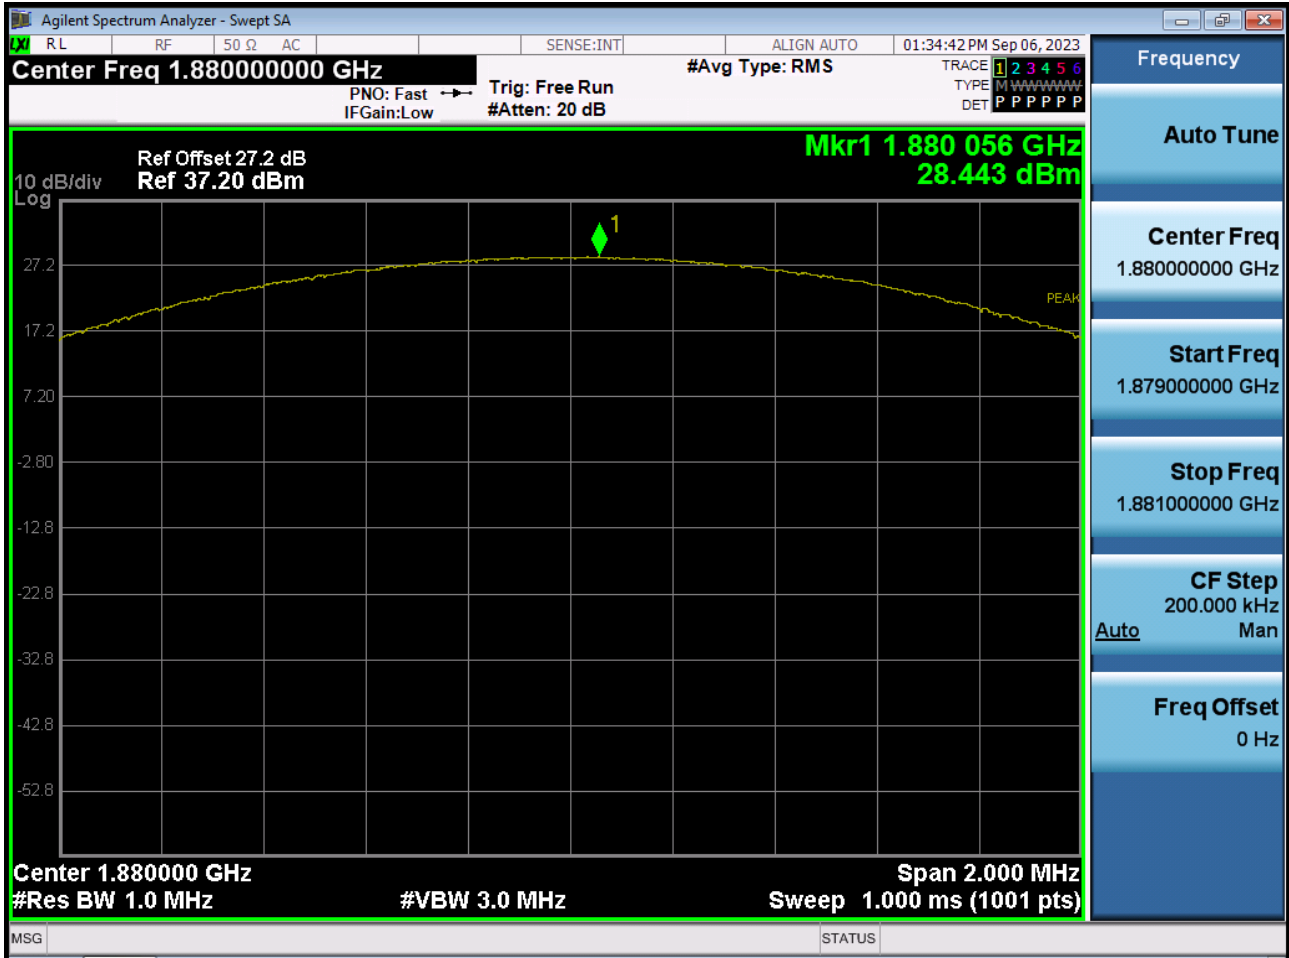


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{AVG}

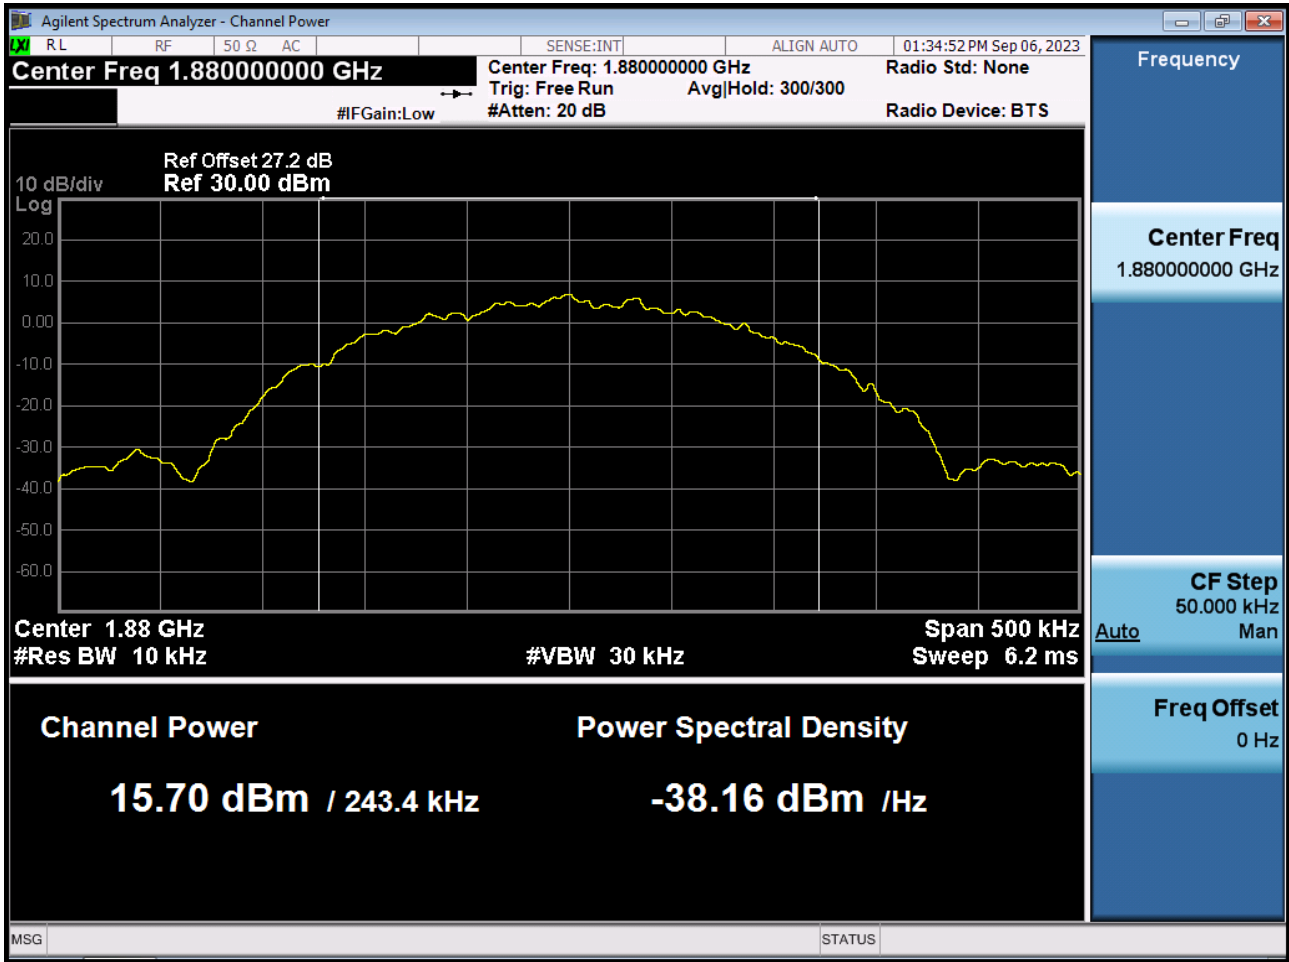


■ GSM850 MODE (190 CH.) Peak-to-Average Ratio

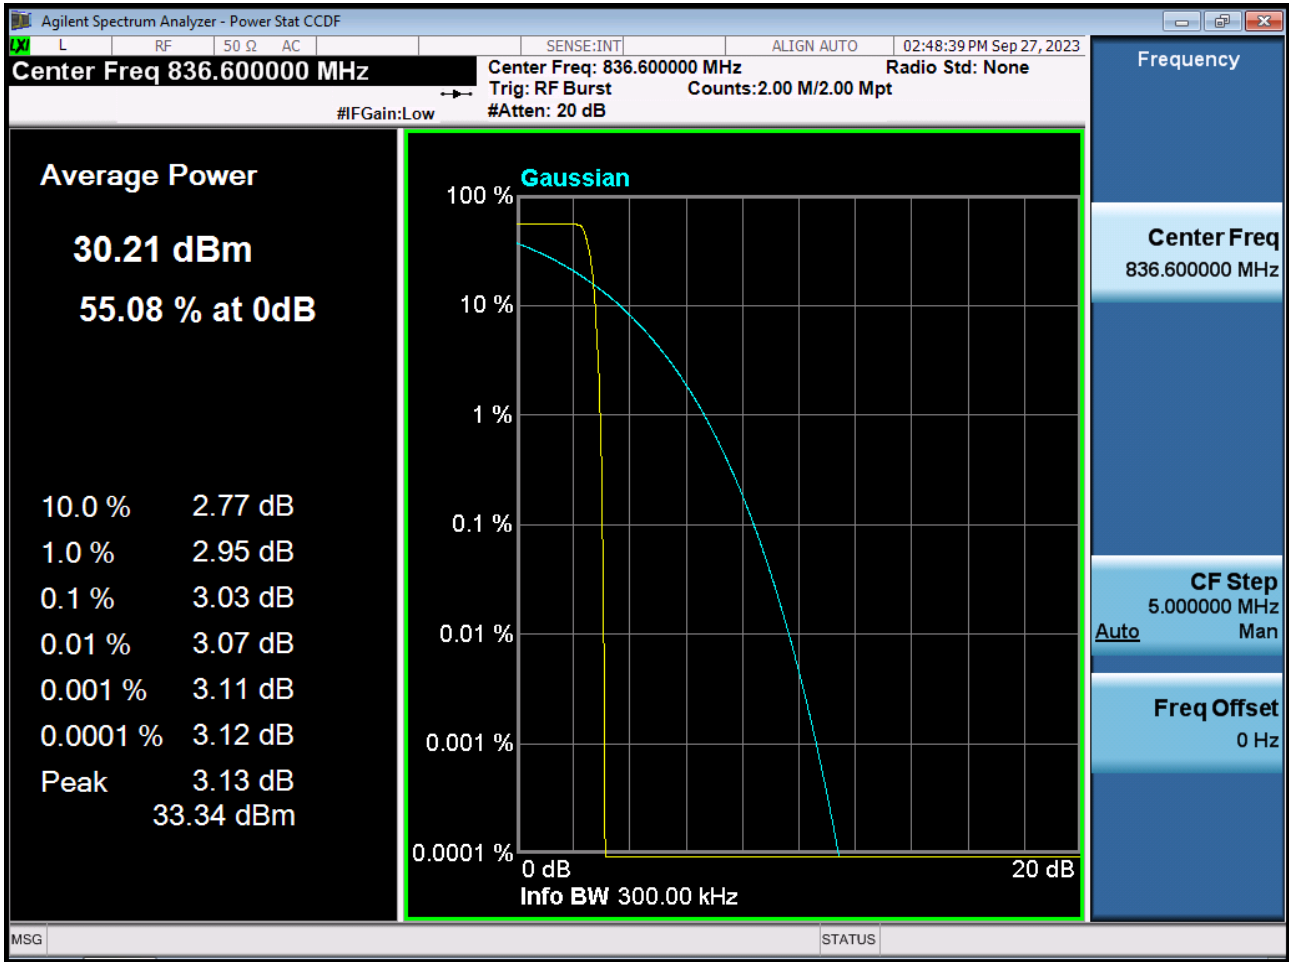


■ GSM850 EDGE (190 CH.) Peak-to-Average Ratio

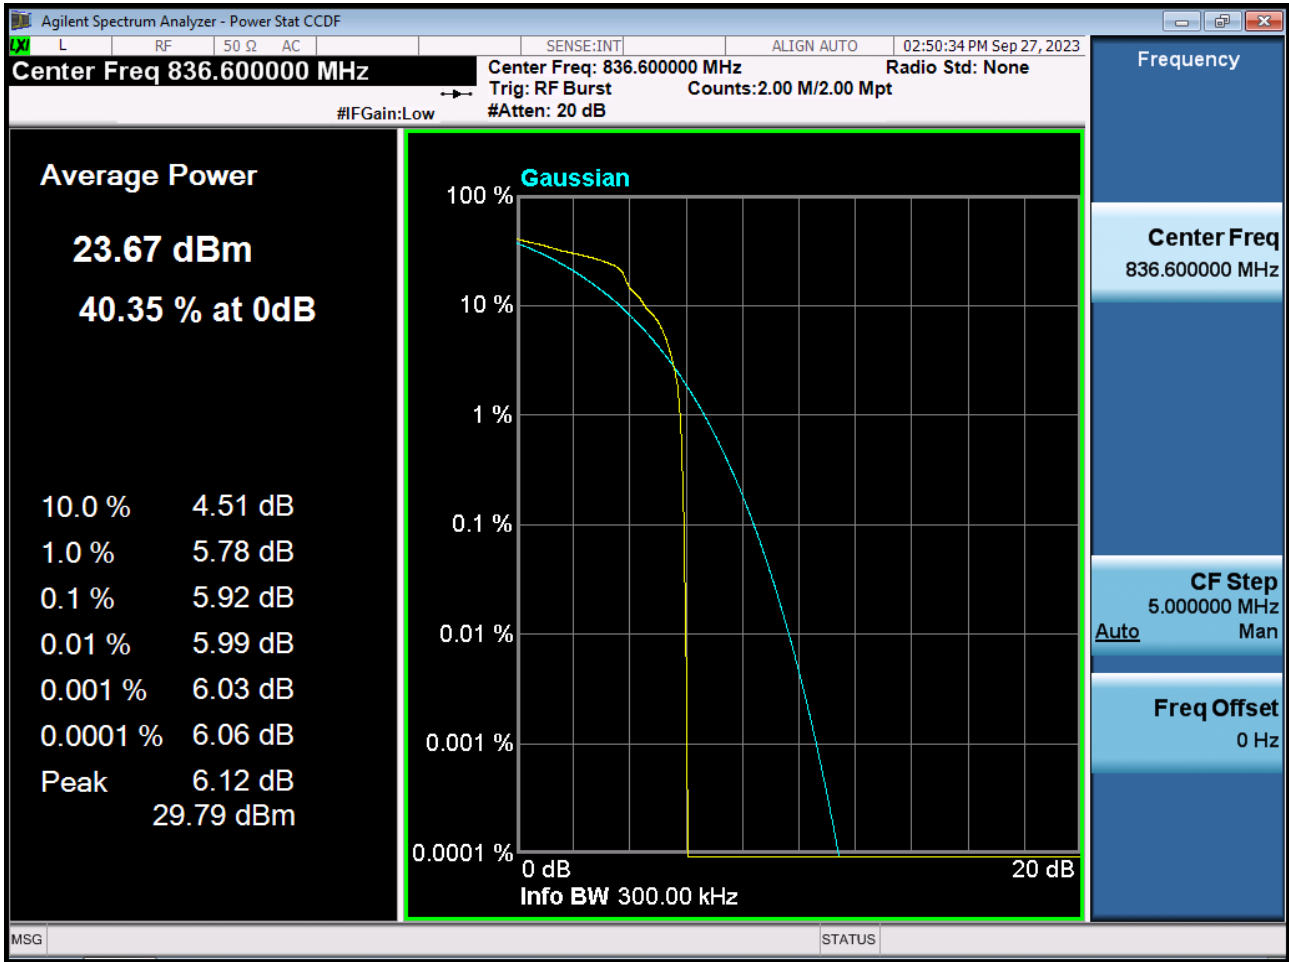


■ WCDMA850 MODE (4408 CH.) Peak-to-Average Ratio

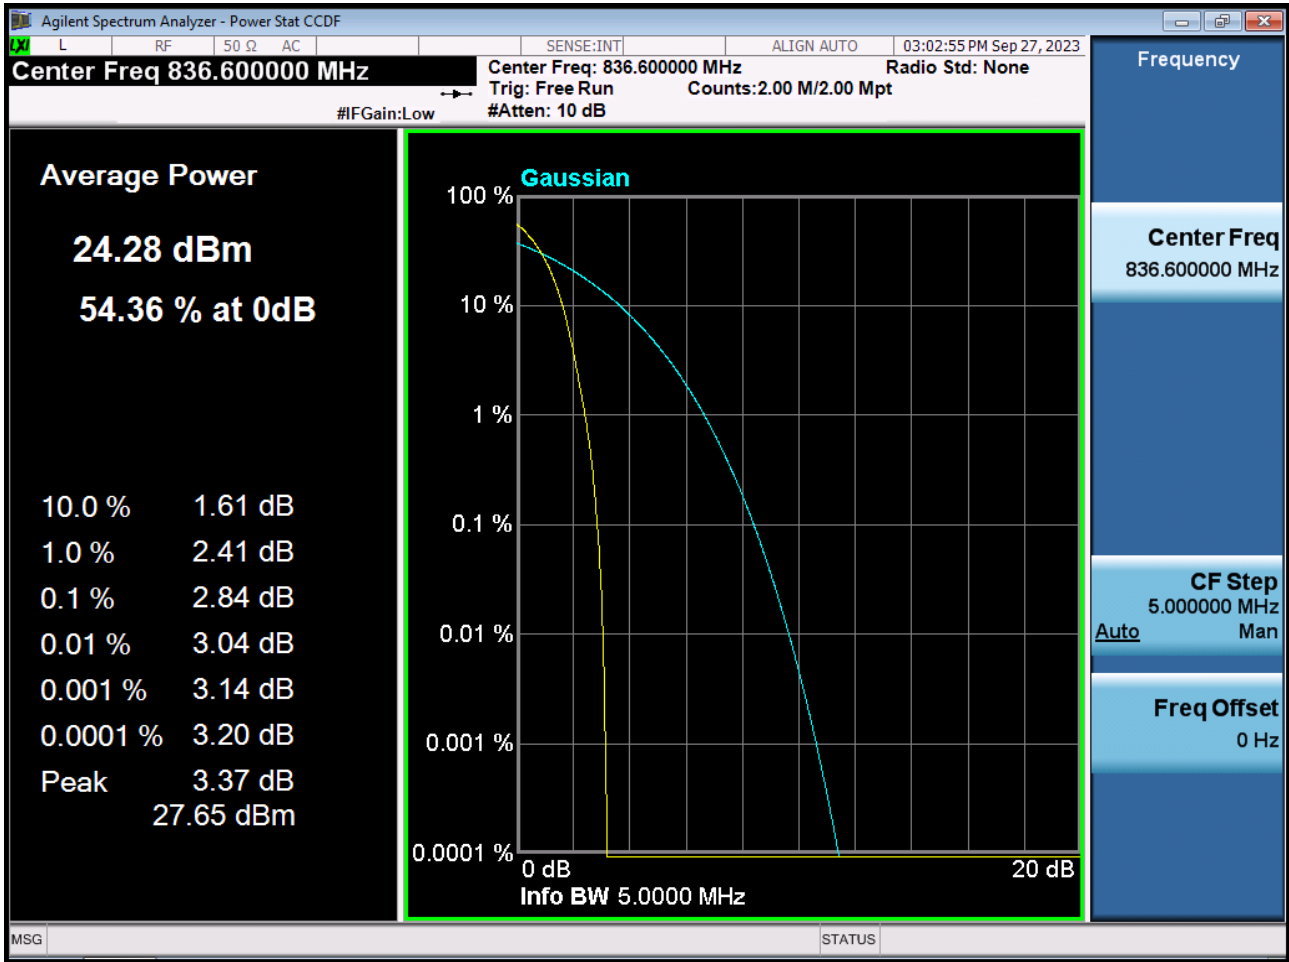


■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

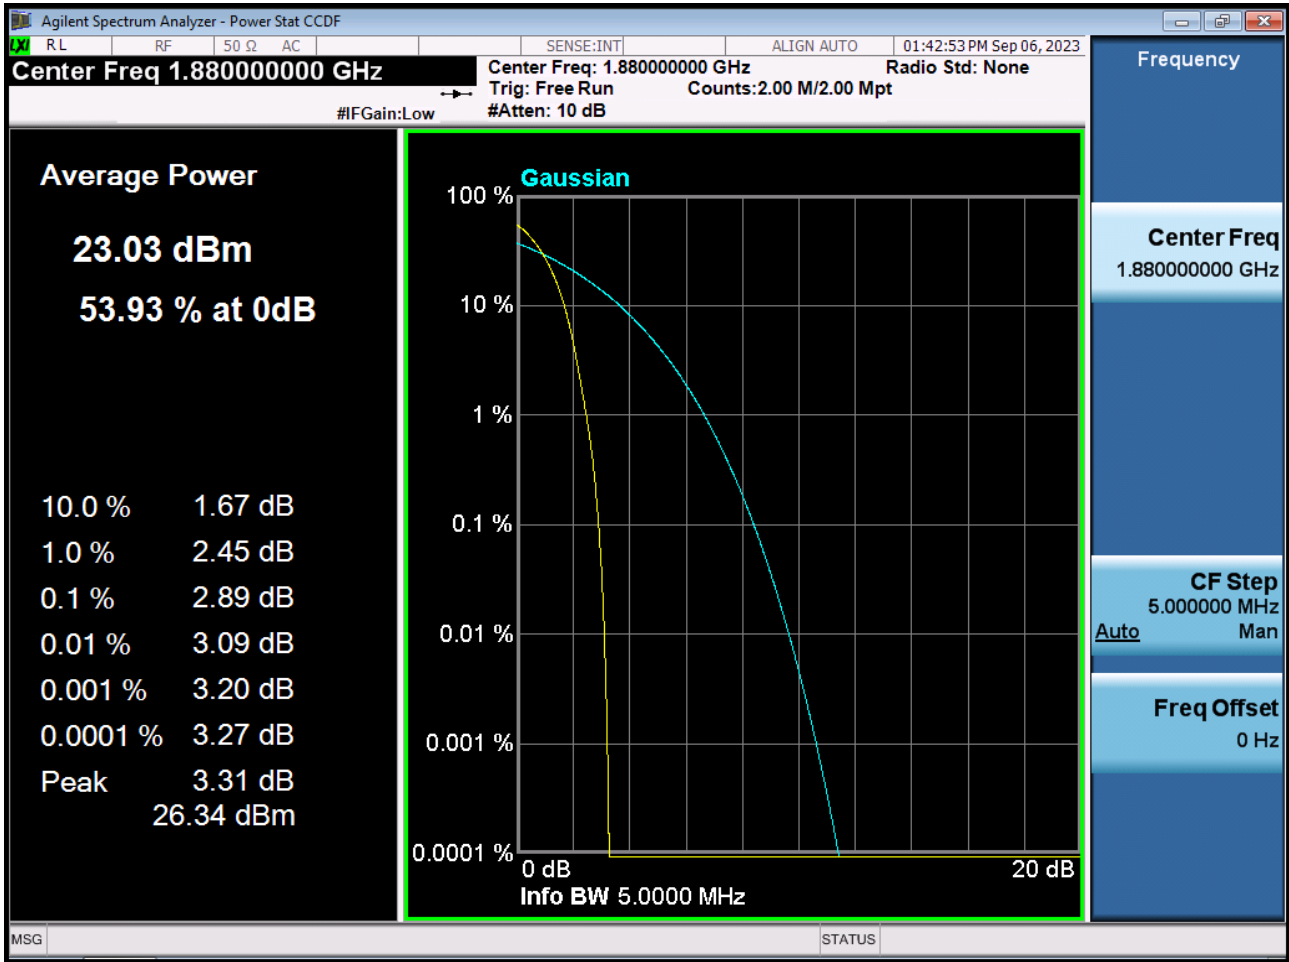

■ WCDMA1700 MODE (1412 CH.) Peak-to-Average Ratio

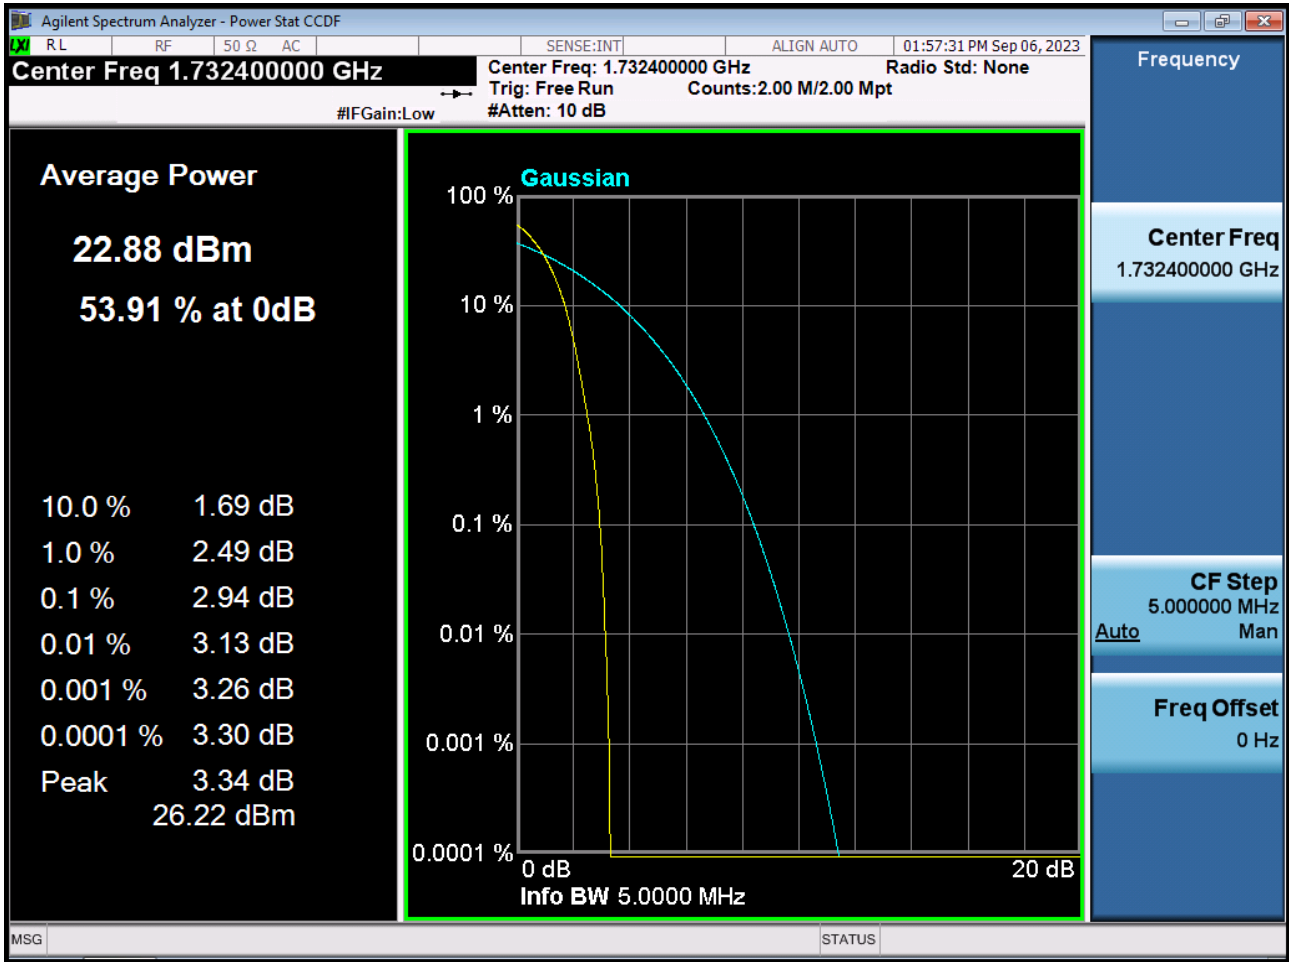


■ GSM850 MODE (128 CH.) Block Edge 1

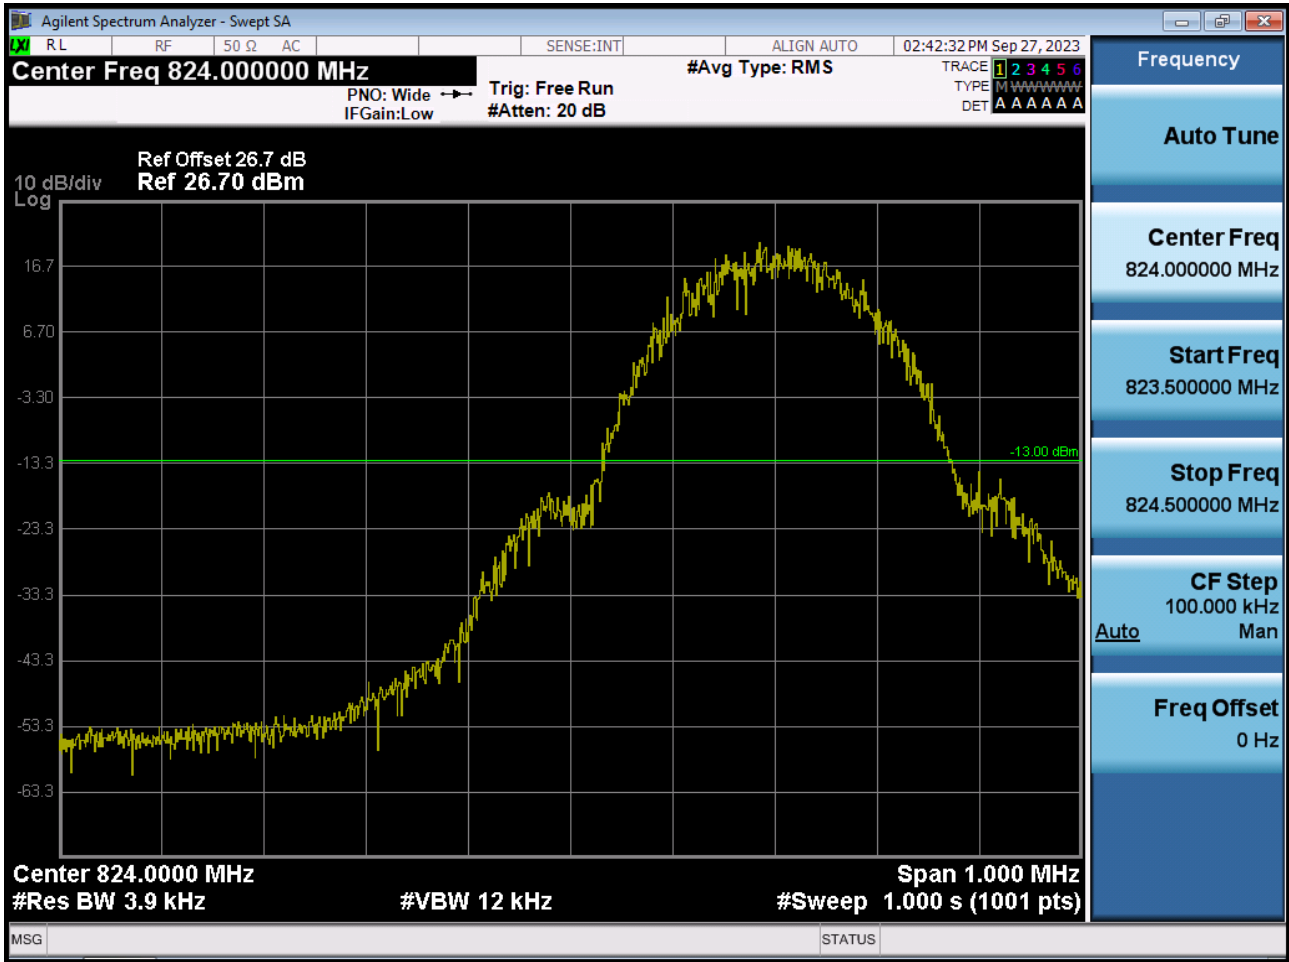


■ GSM850 MODE (128 CH.) Block Edge 3



■ GSM850 MODE (251 CH.) Block Edge 1

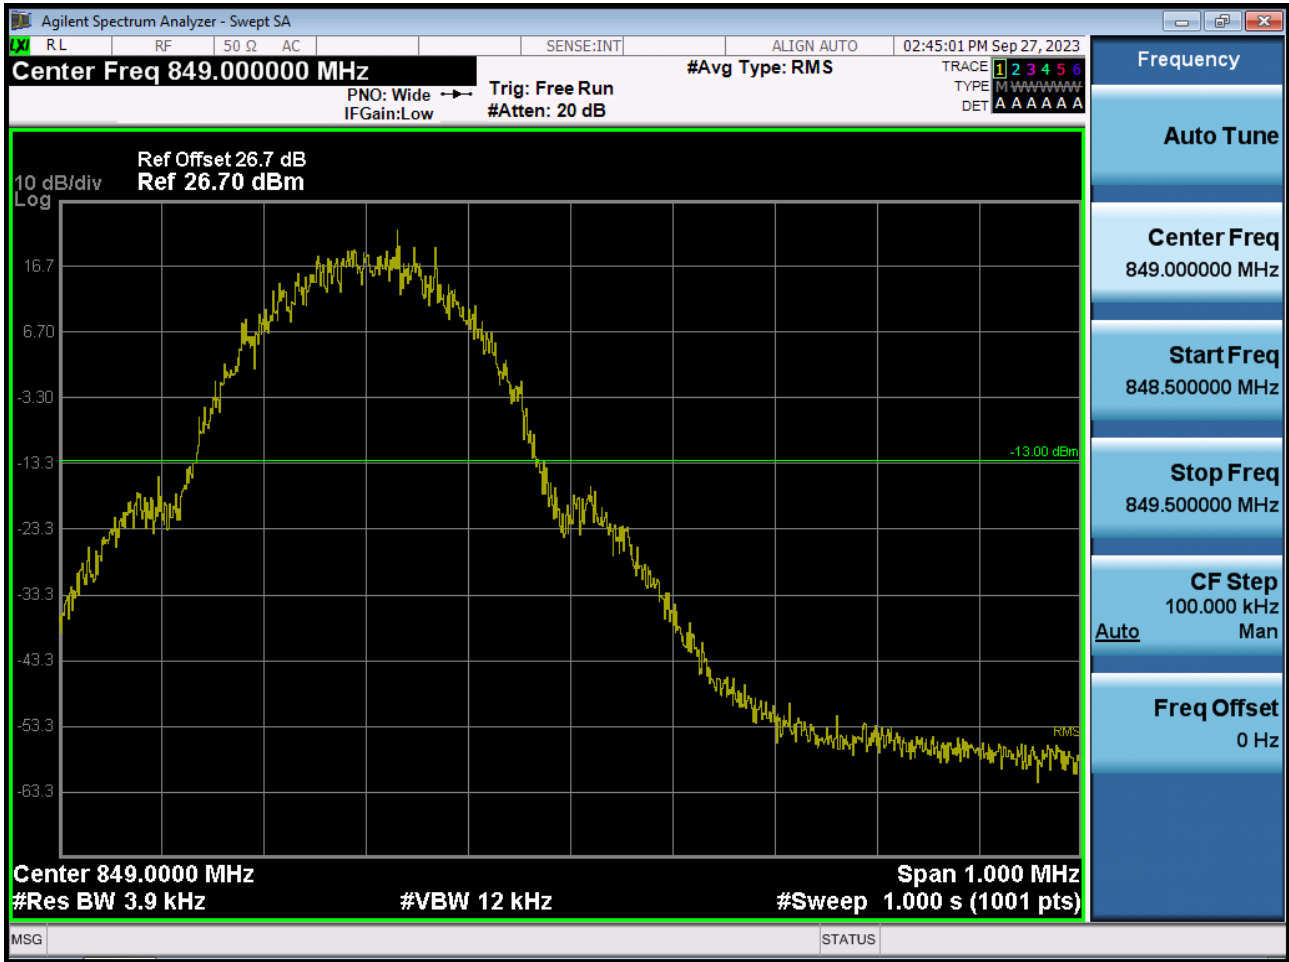


■ GSM850 MODE (251 CH.) Block Edge 2

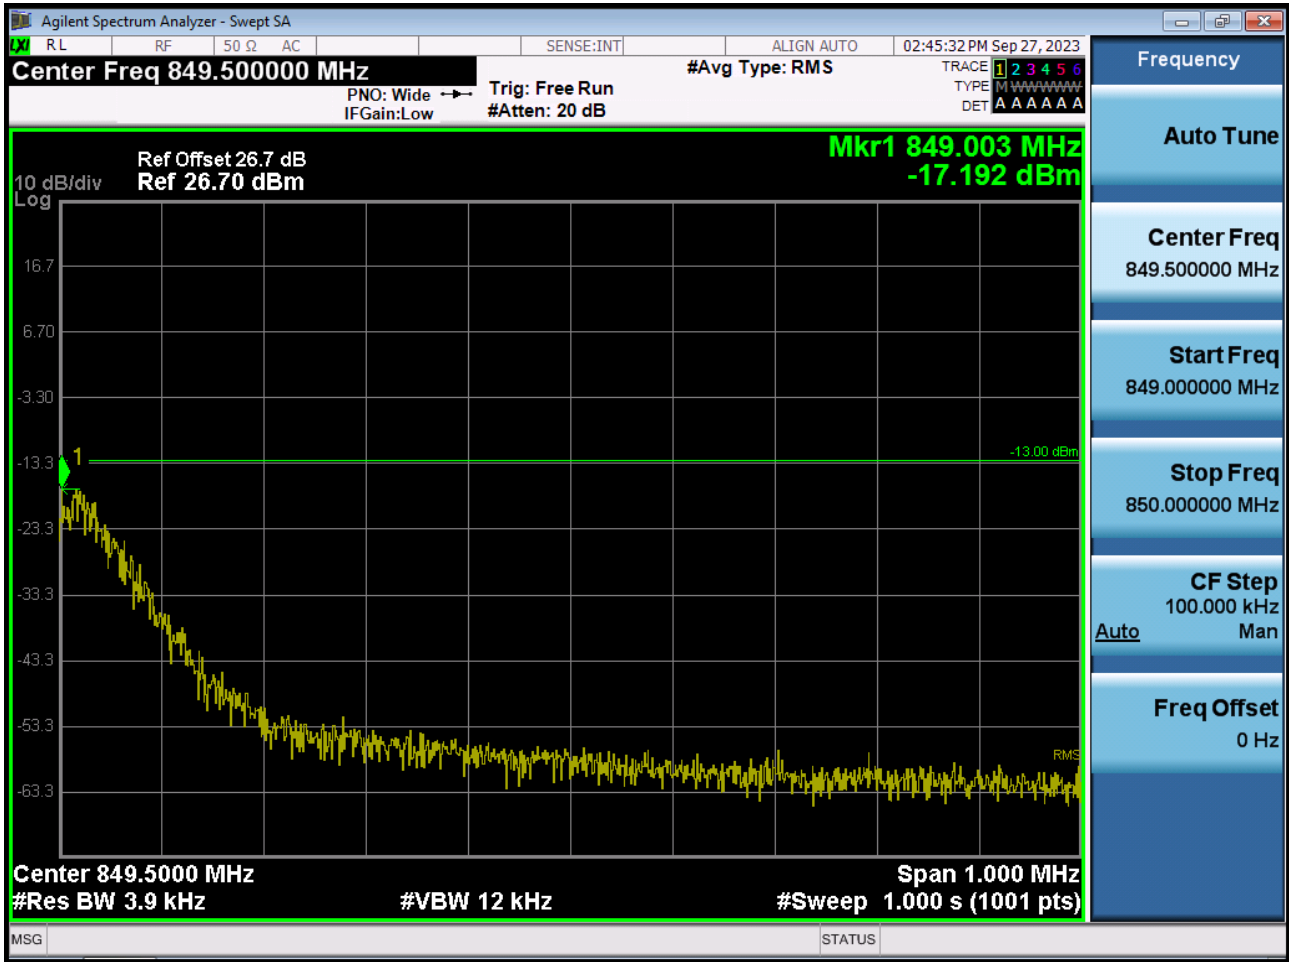


■ GSM850 MODE (251 CH.) Block Edge 3




■ EDGE MODE (128 CH.) Block Edge 1

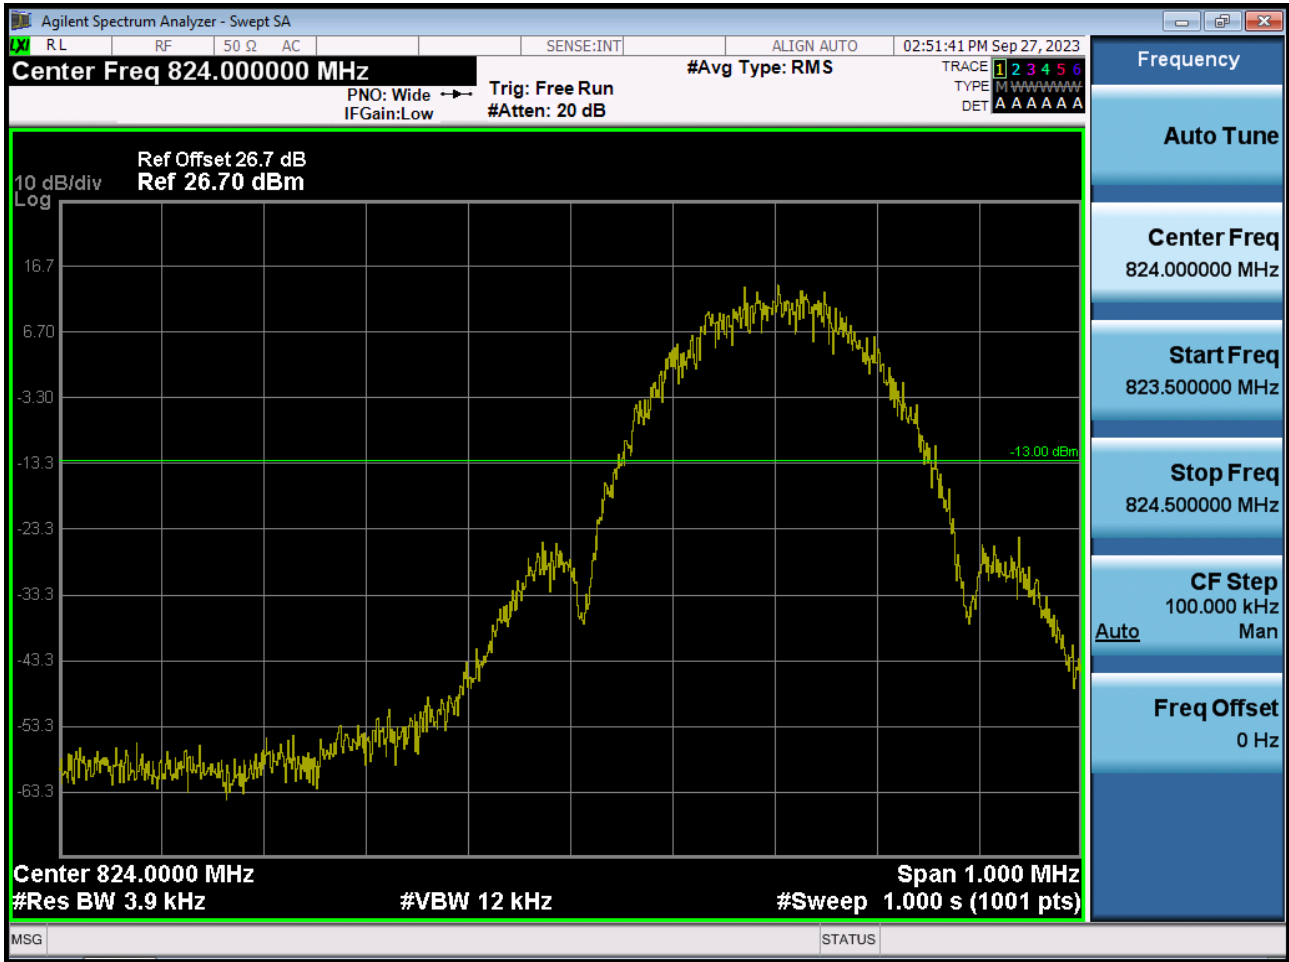


■ EDGE MODE (128 CH.) Block Edge 2

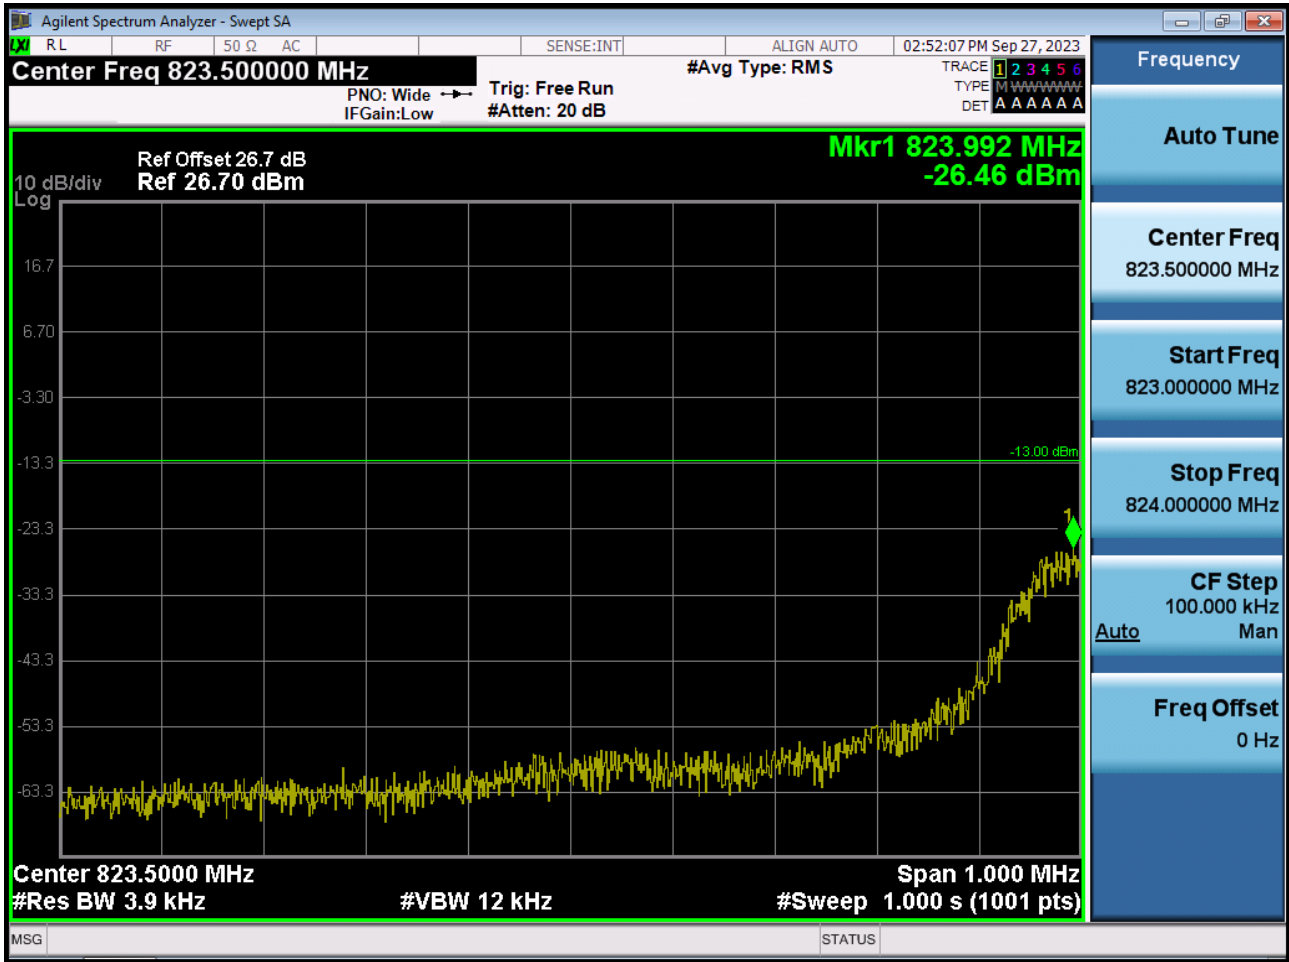


■ EDGE MODE (128 CH.) Block Edge 3

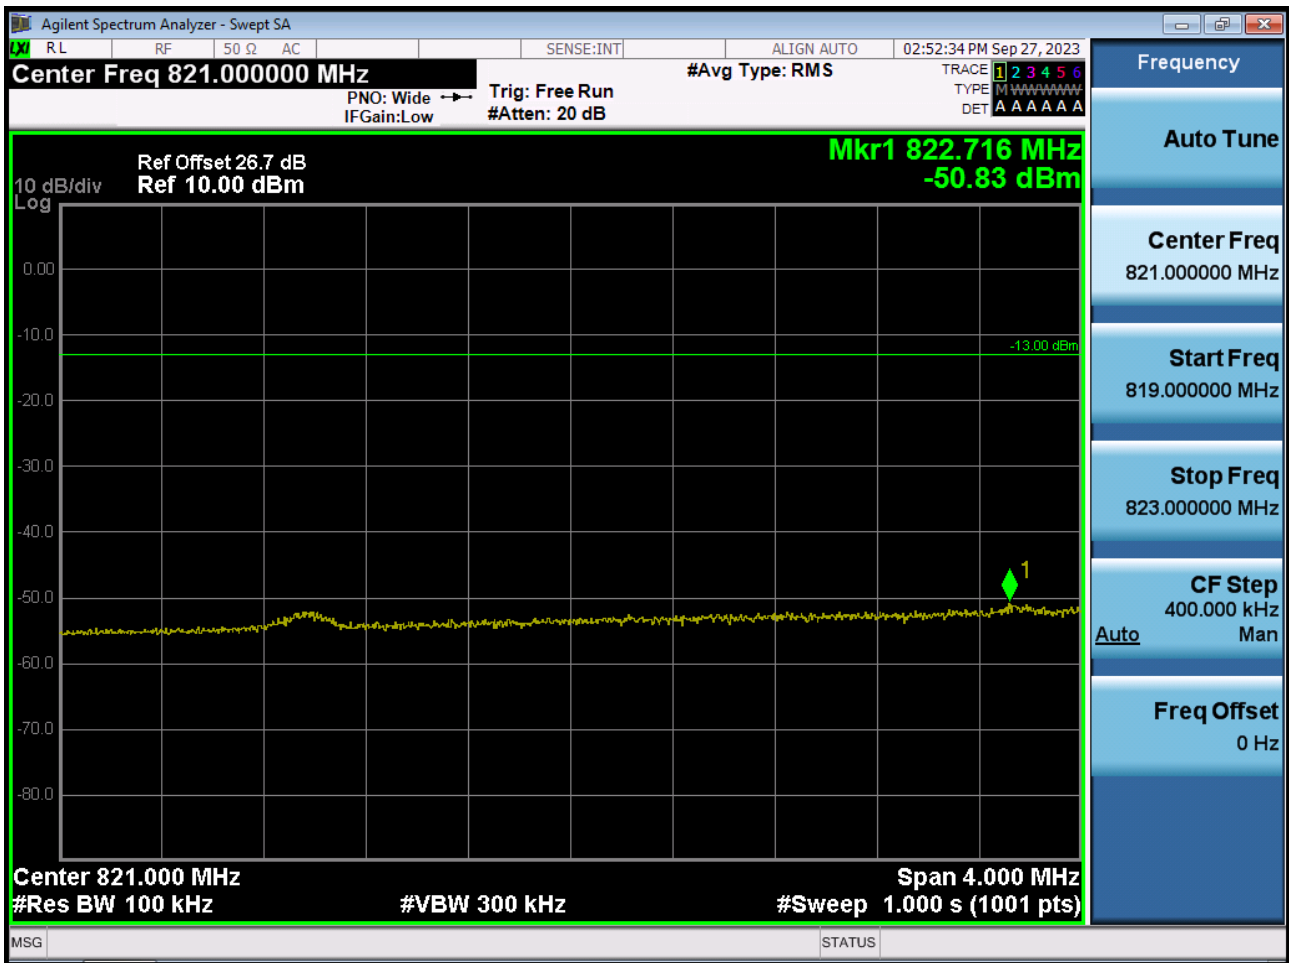


■ EDGE MODE (251 CH.) Block Edge 1

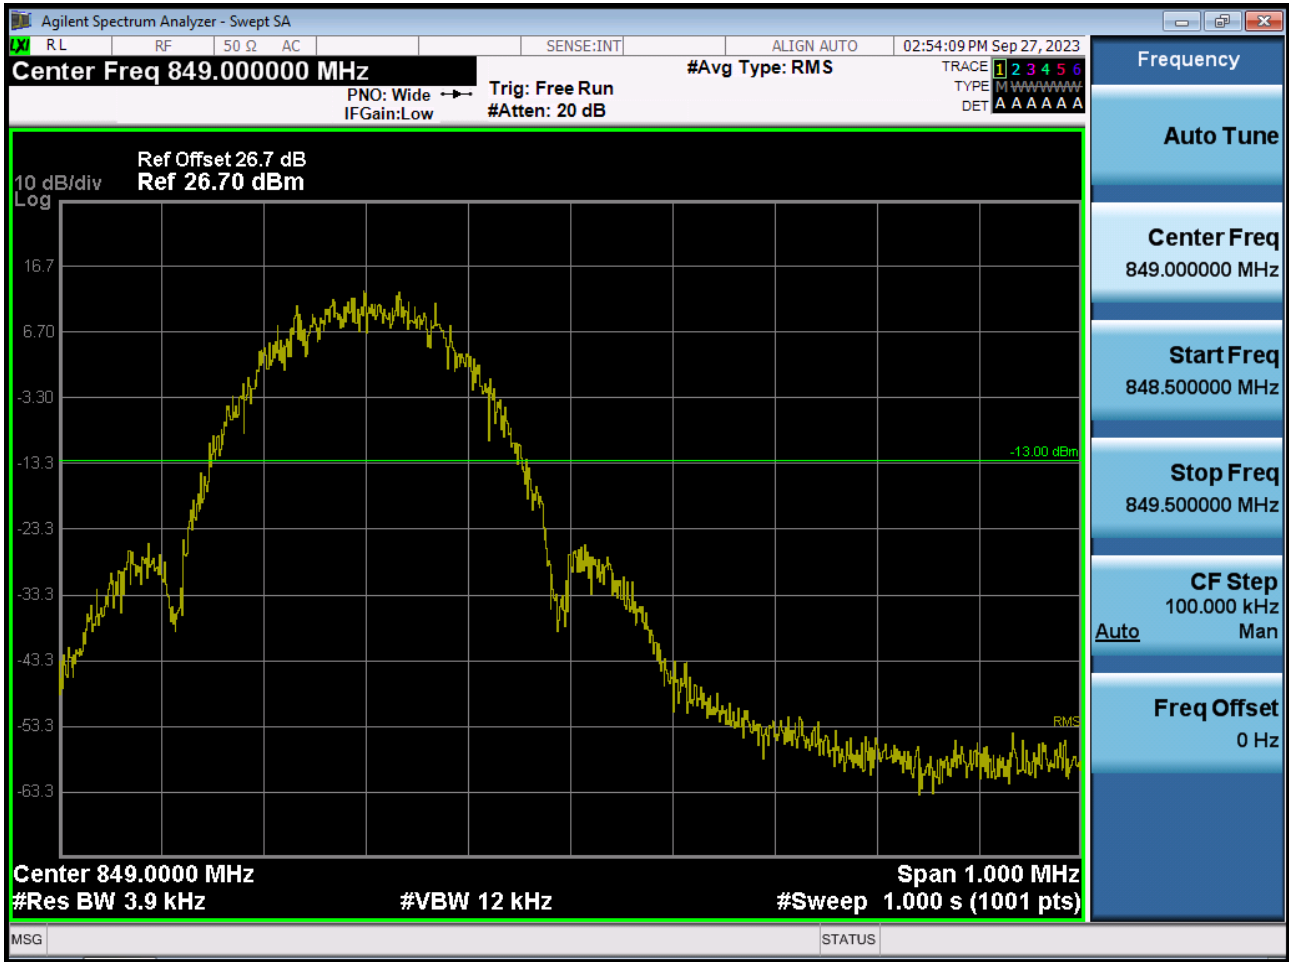


■ EDGE MODE (251 CH.) Block Edge 2

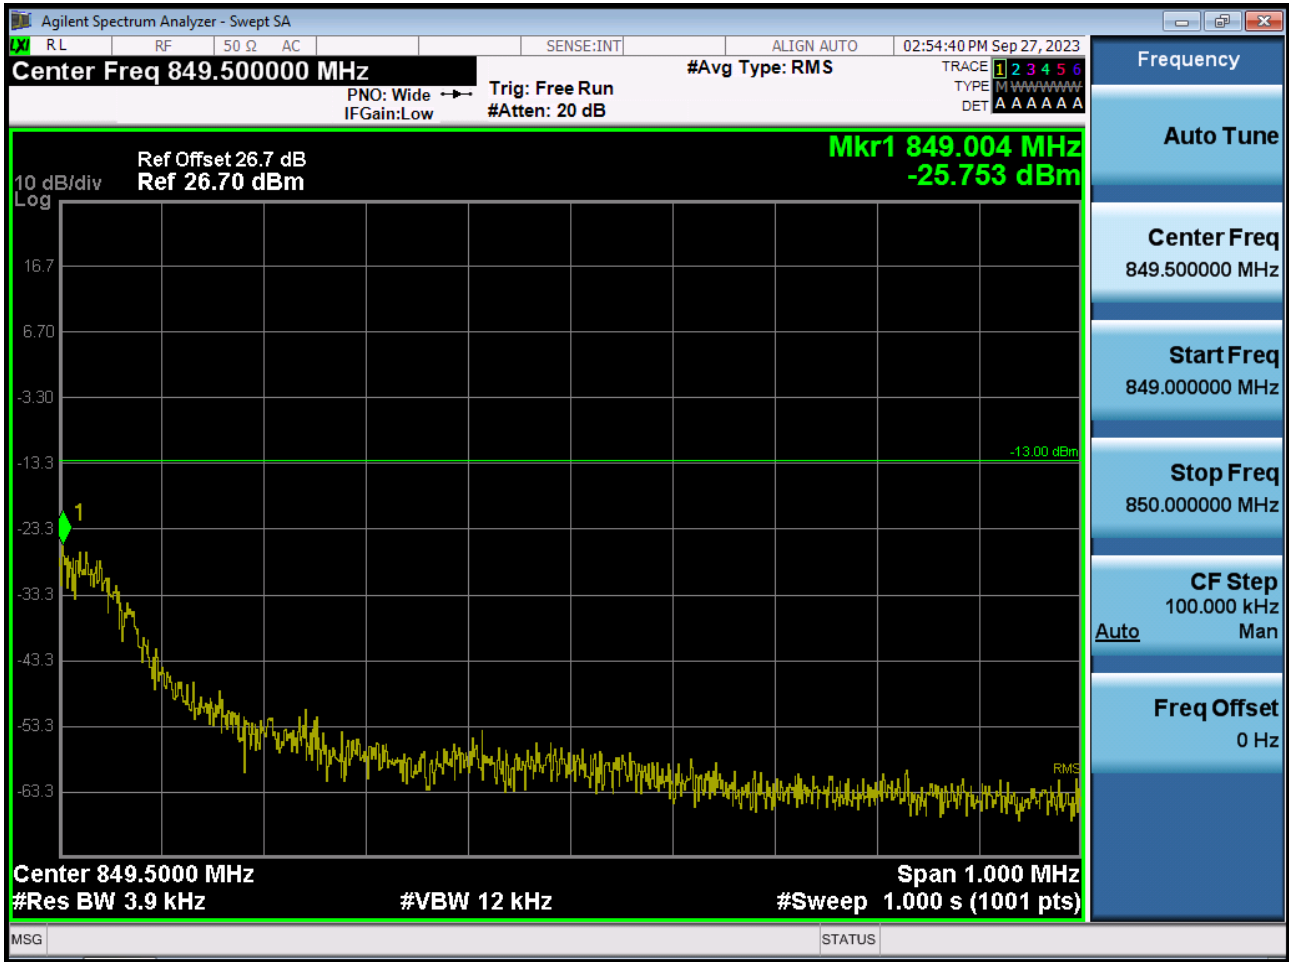


■ GSM1900 MODE (512 CH.) Block Edge 1

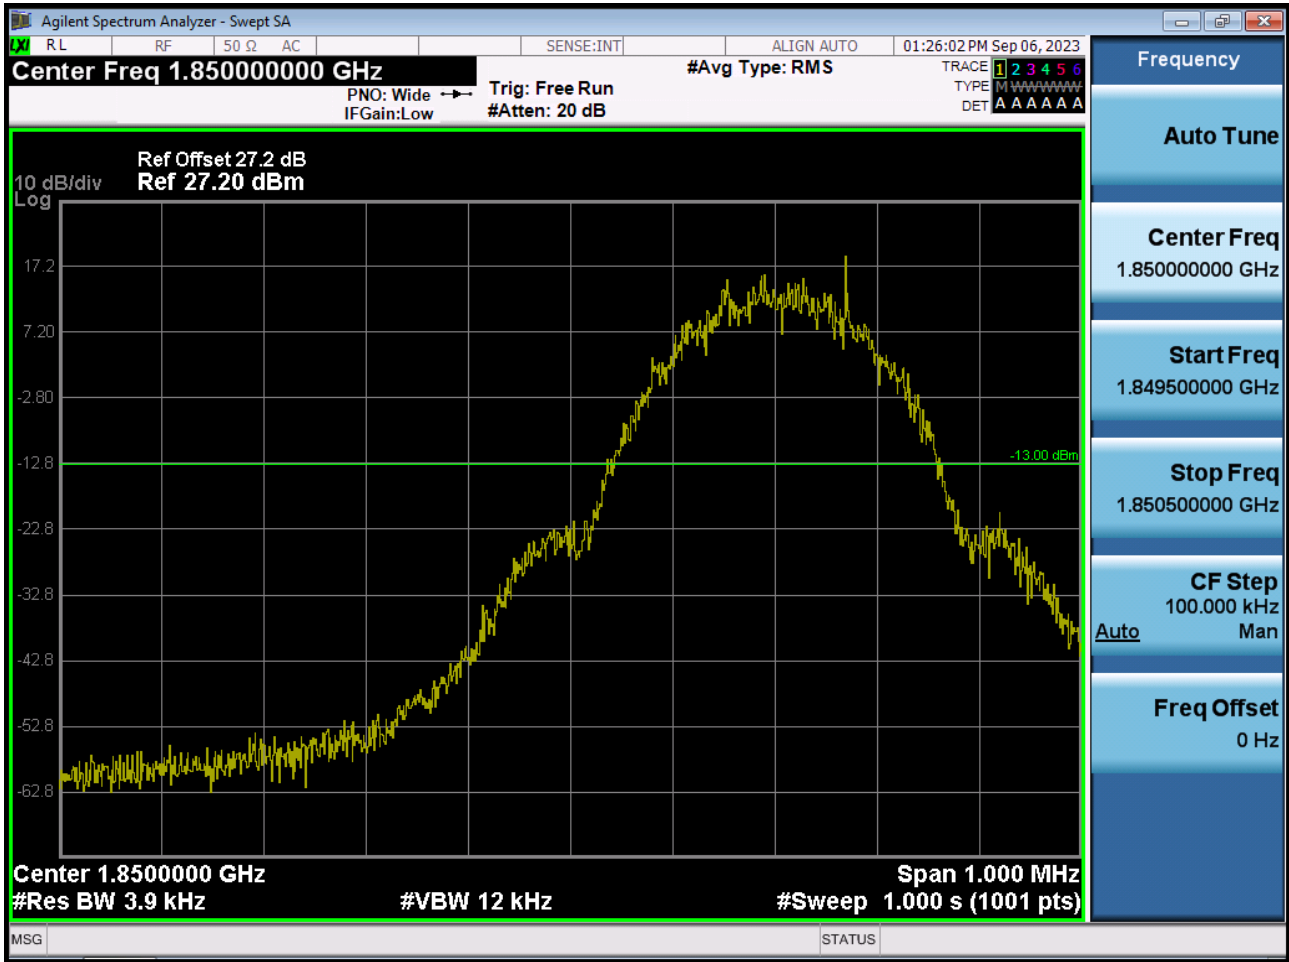

■ GSM1900 MODE (512 CH.) Block Edge 2

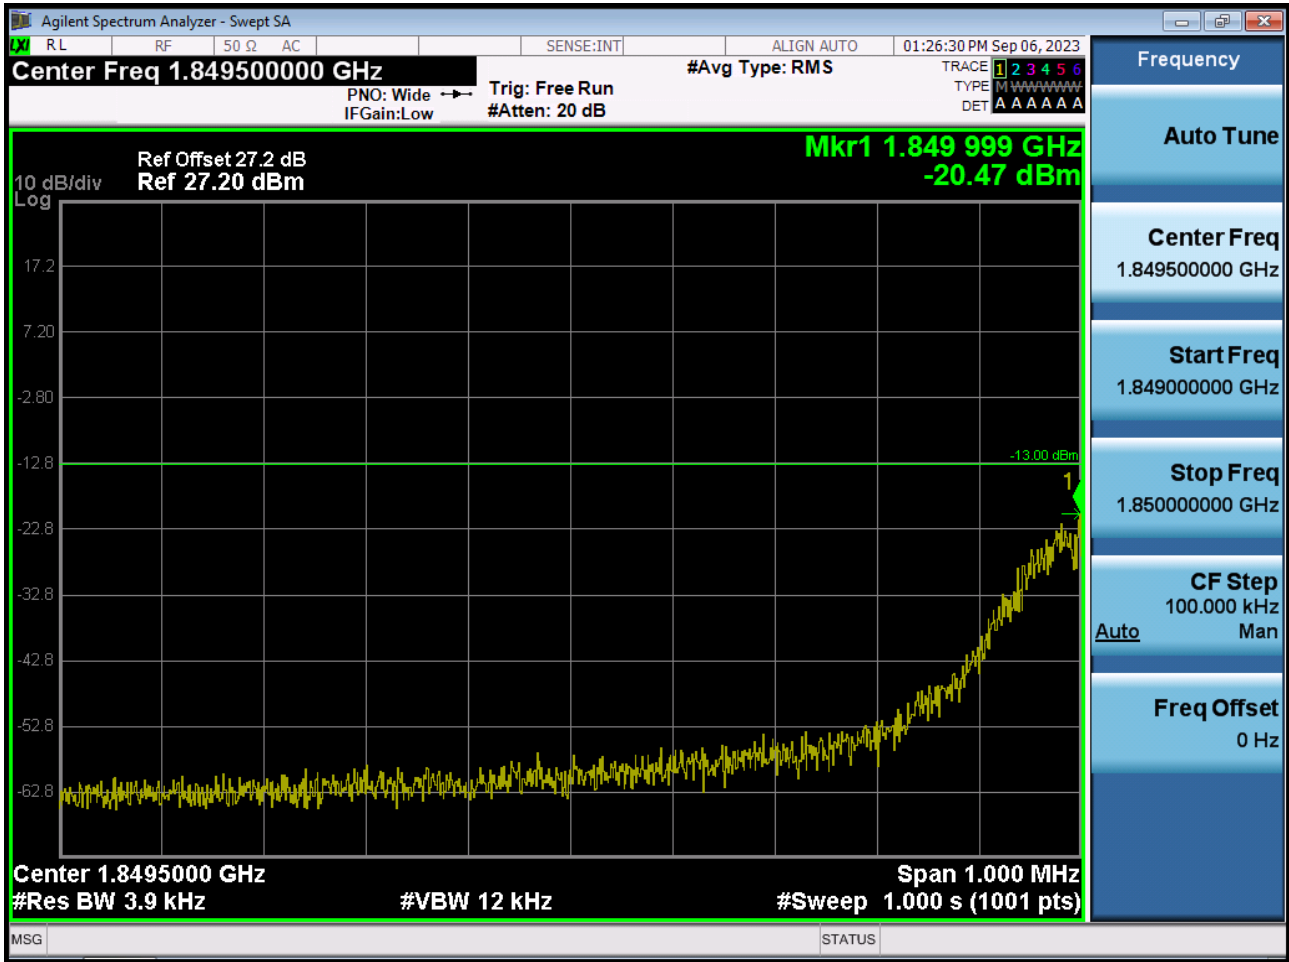


■ GSM1900 MODE (512 CH.) Block Edge 3

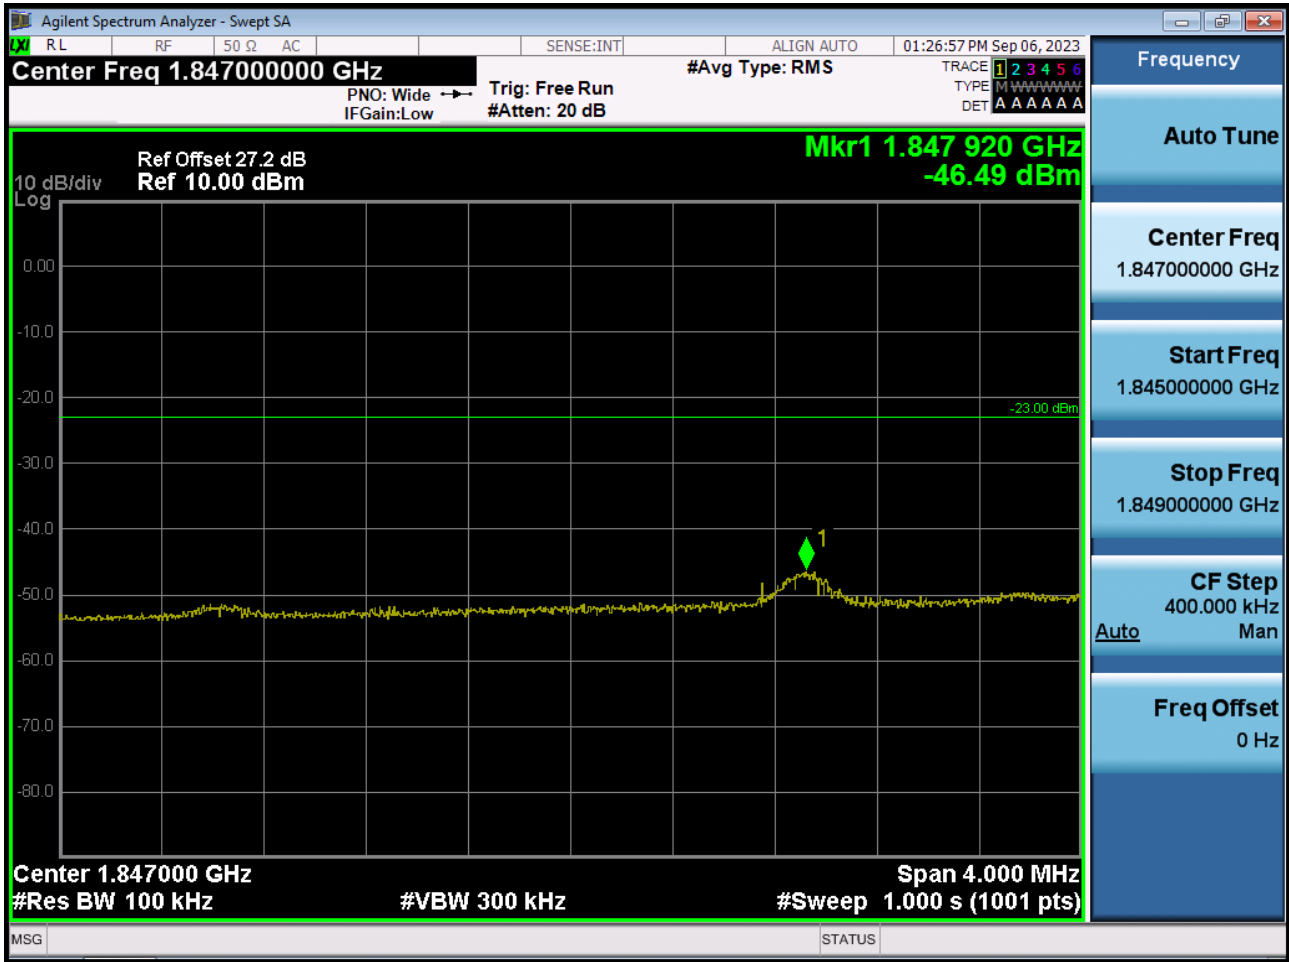


Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -46.49 dBm + 10 dB = -36.49 dBm


■ GSM1900 MODE (810 CH.) Block Edge 1

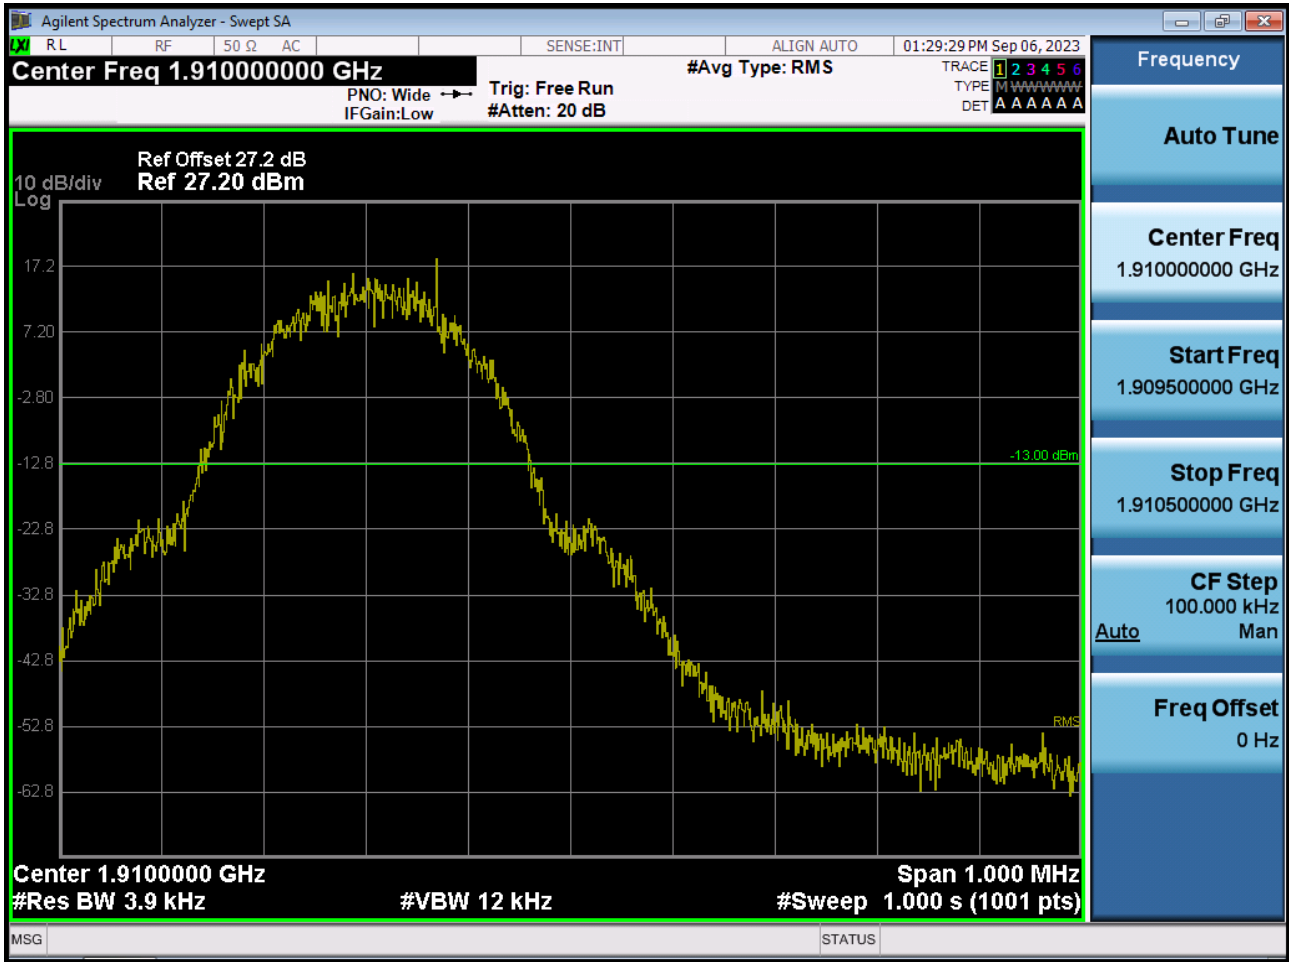

■ GSM1900 MODE (810 CH.) Block Edge 2

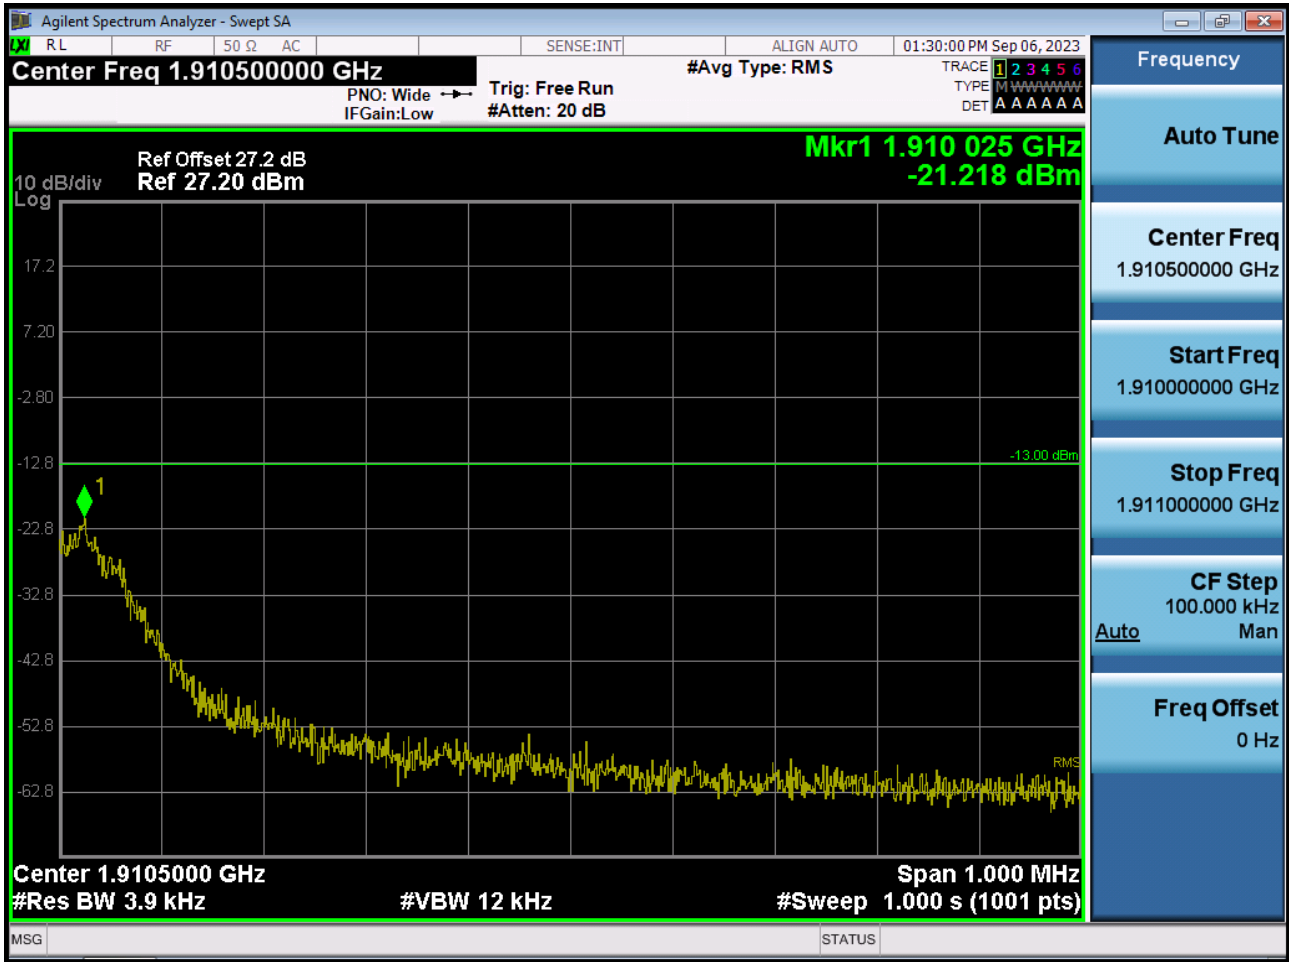


■ GSM1900 MODE (810 CH.) Block Edge 3

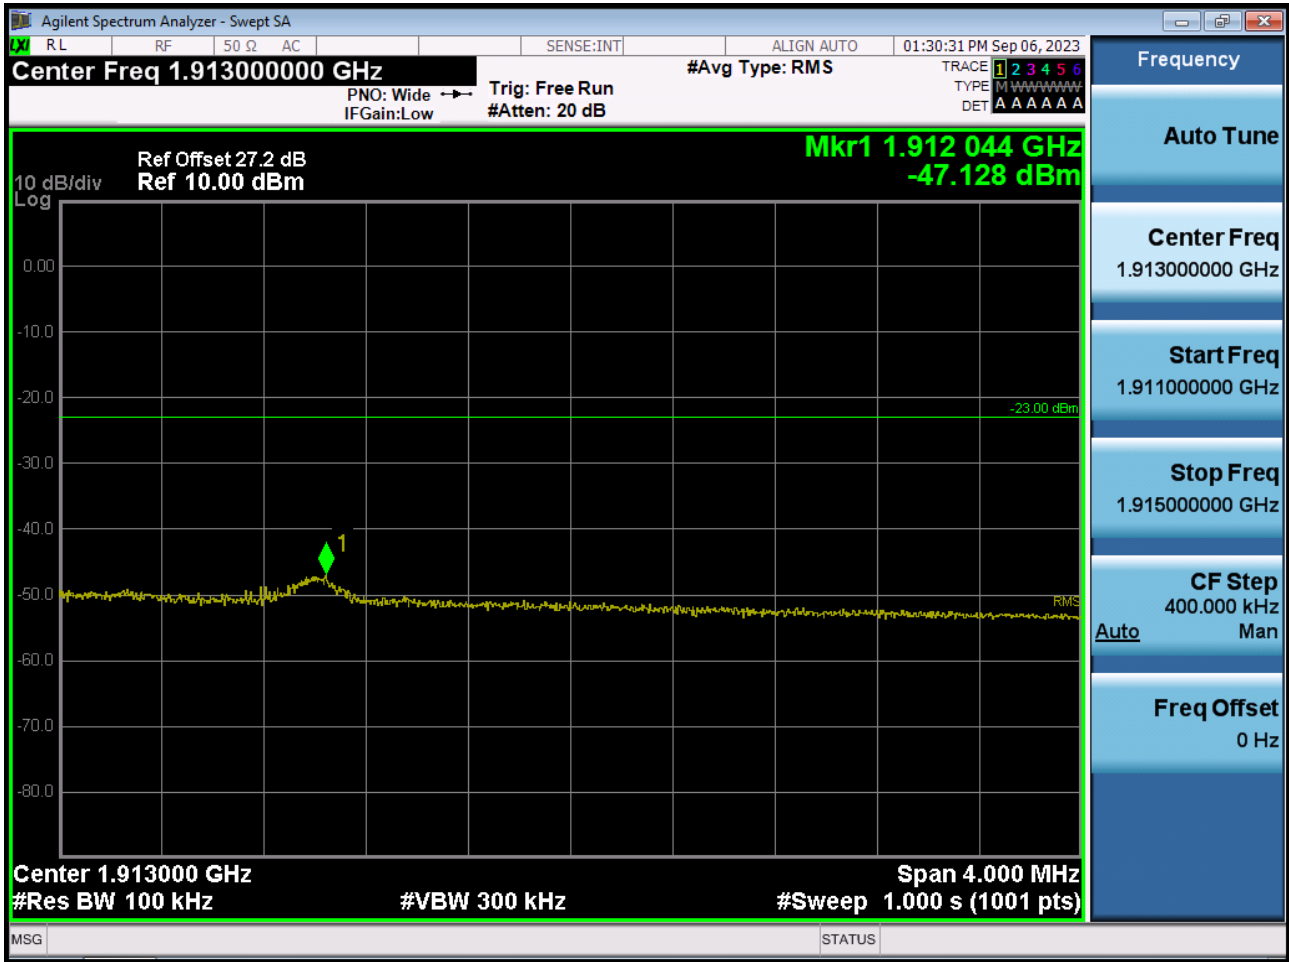


Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -47.128 dBm + 10 dB = -37.128 dBm

■ EDGE MODE (512 CH.) Block Edge 1

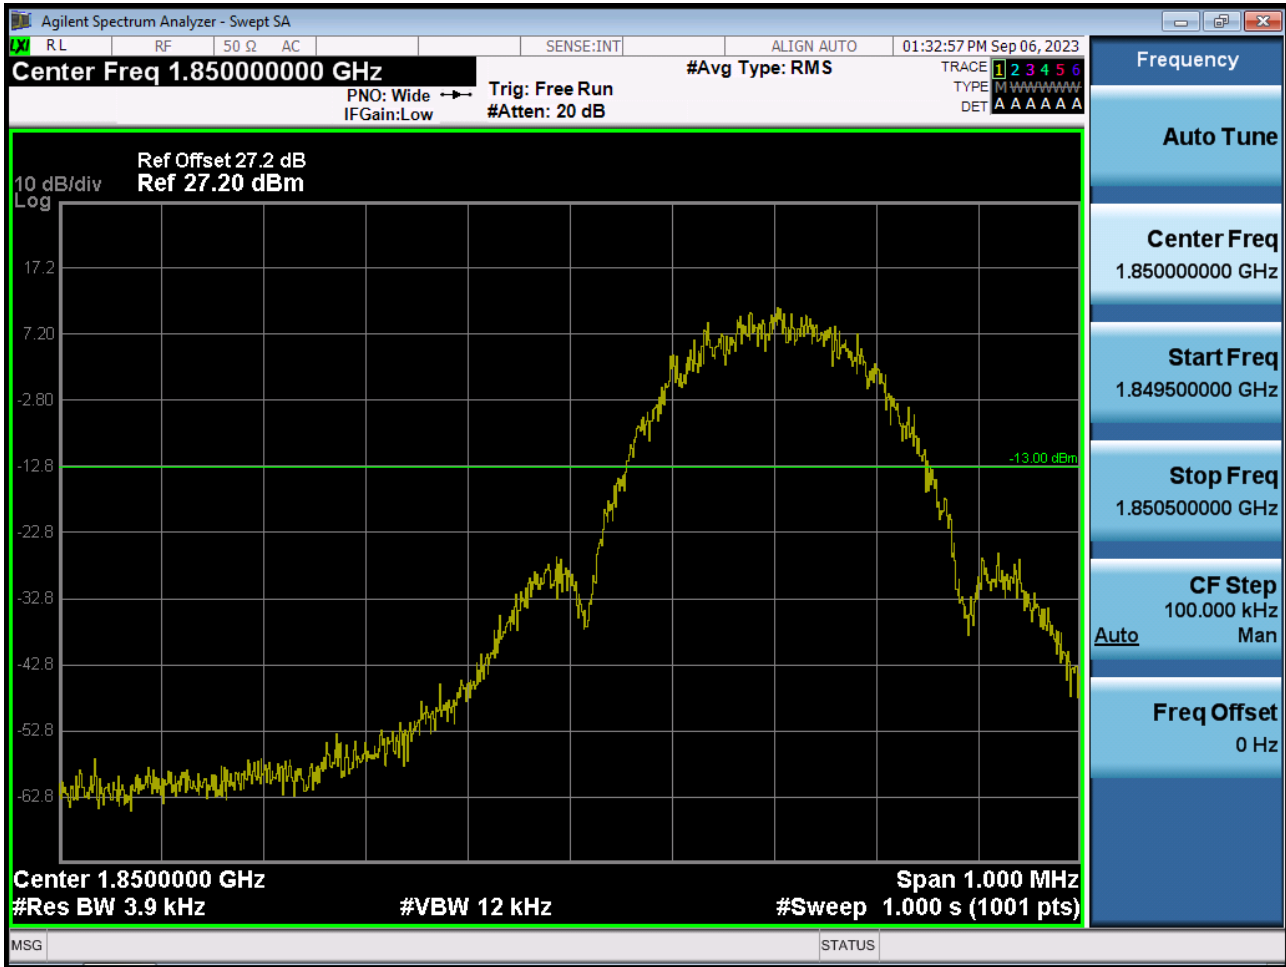

■ EDGE MODE (512 CH.) Block Edge 2

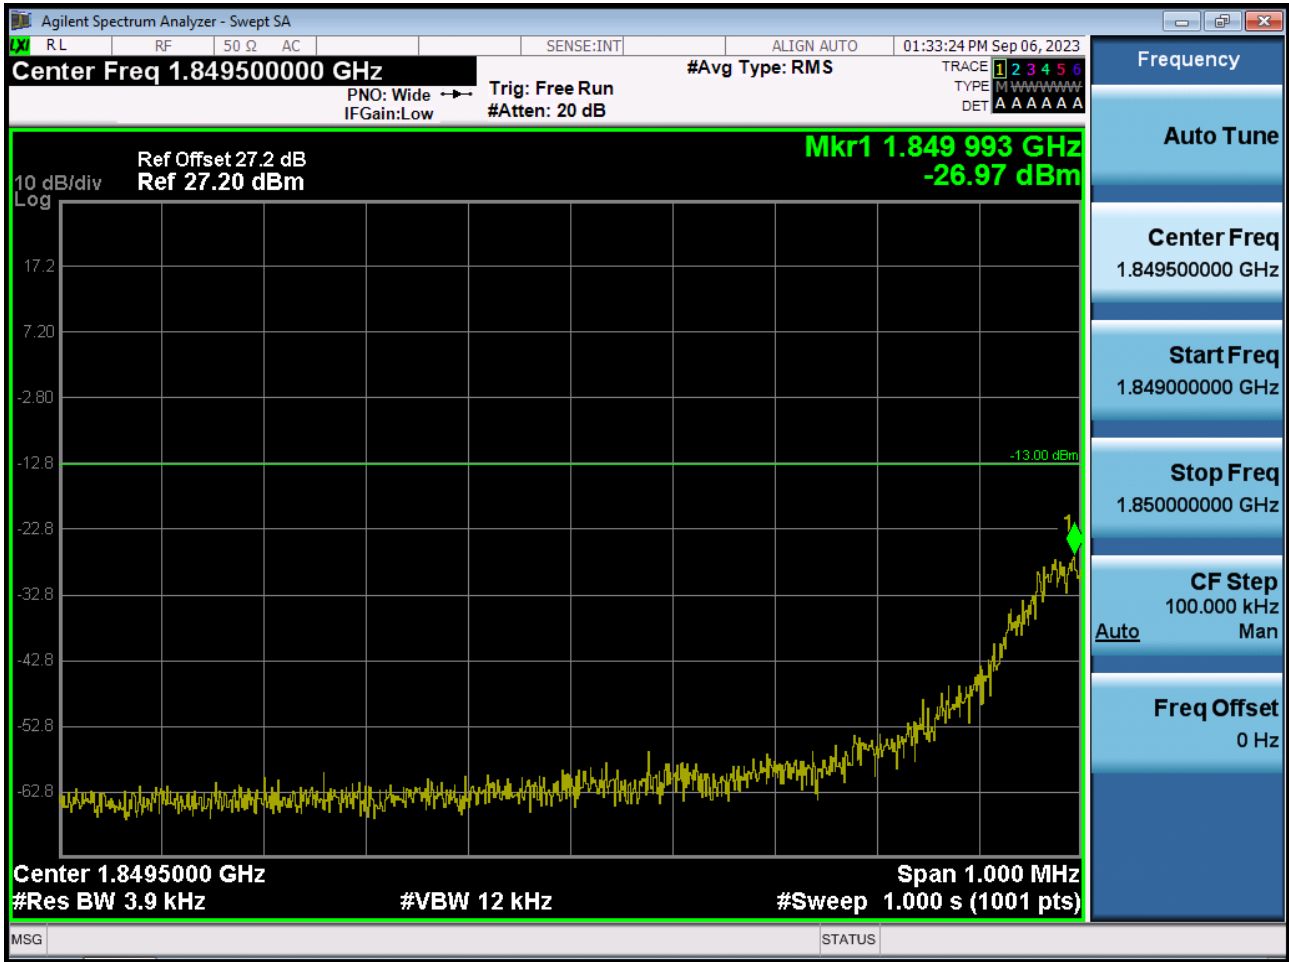


■ EDGE MODE (512 CH.) Block Edge 3




Note: We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -51.238 dBm + 10 dB = -41.238 dBm

■ EDGE MODE (810 CH.) Block Edge 1

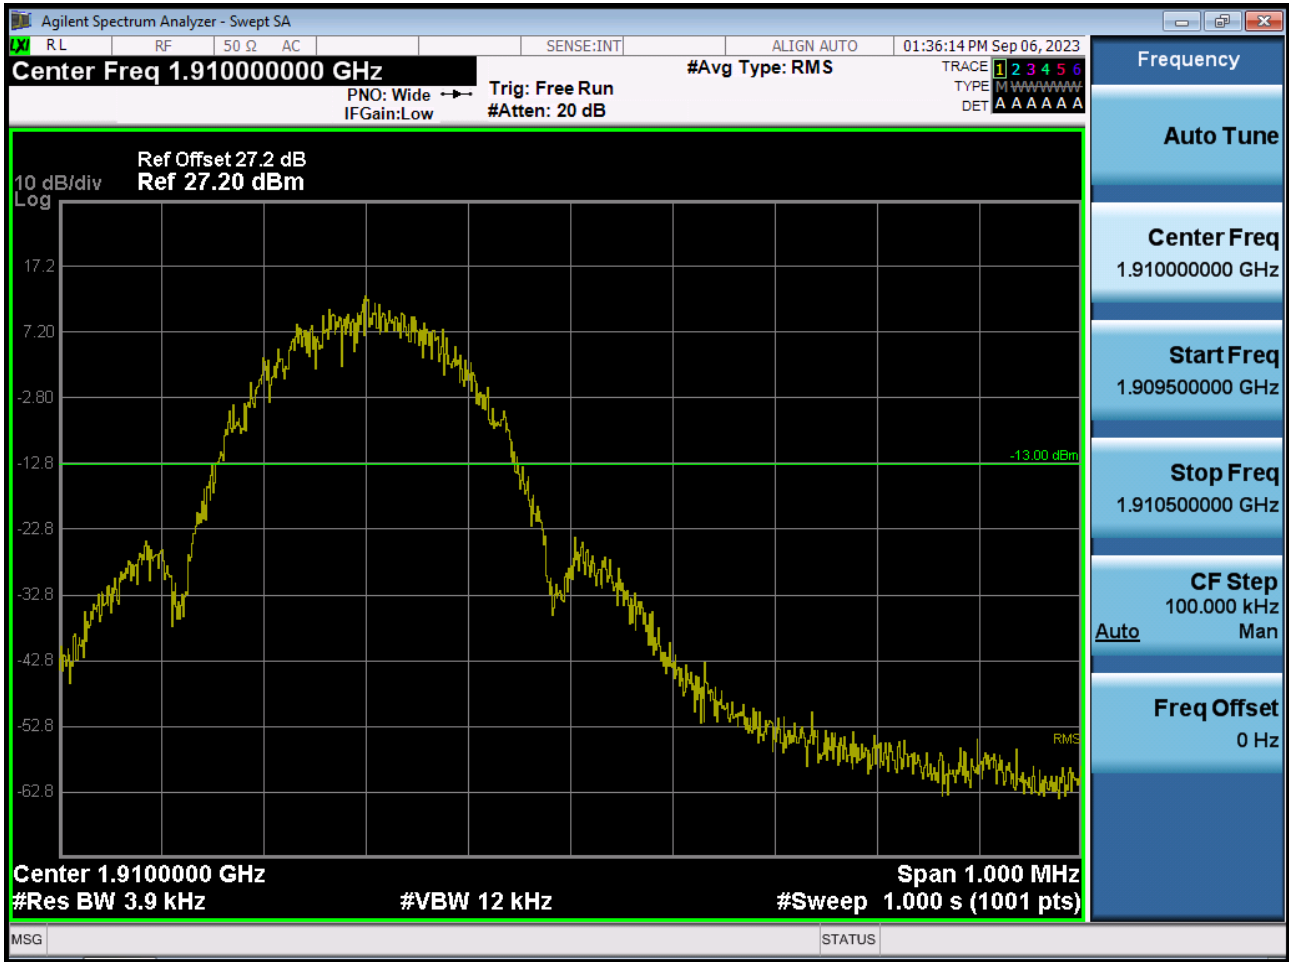

■ EDGE MODE (810 CH.) Block Edge 3

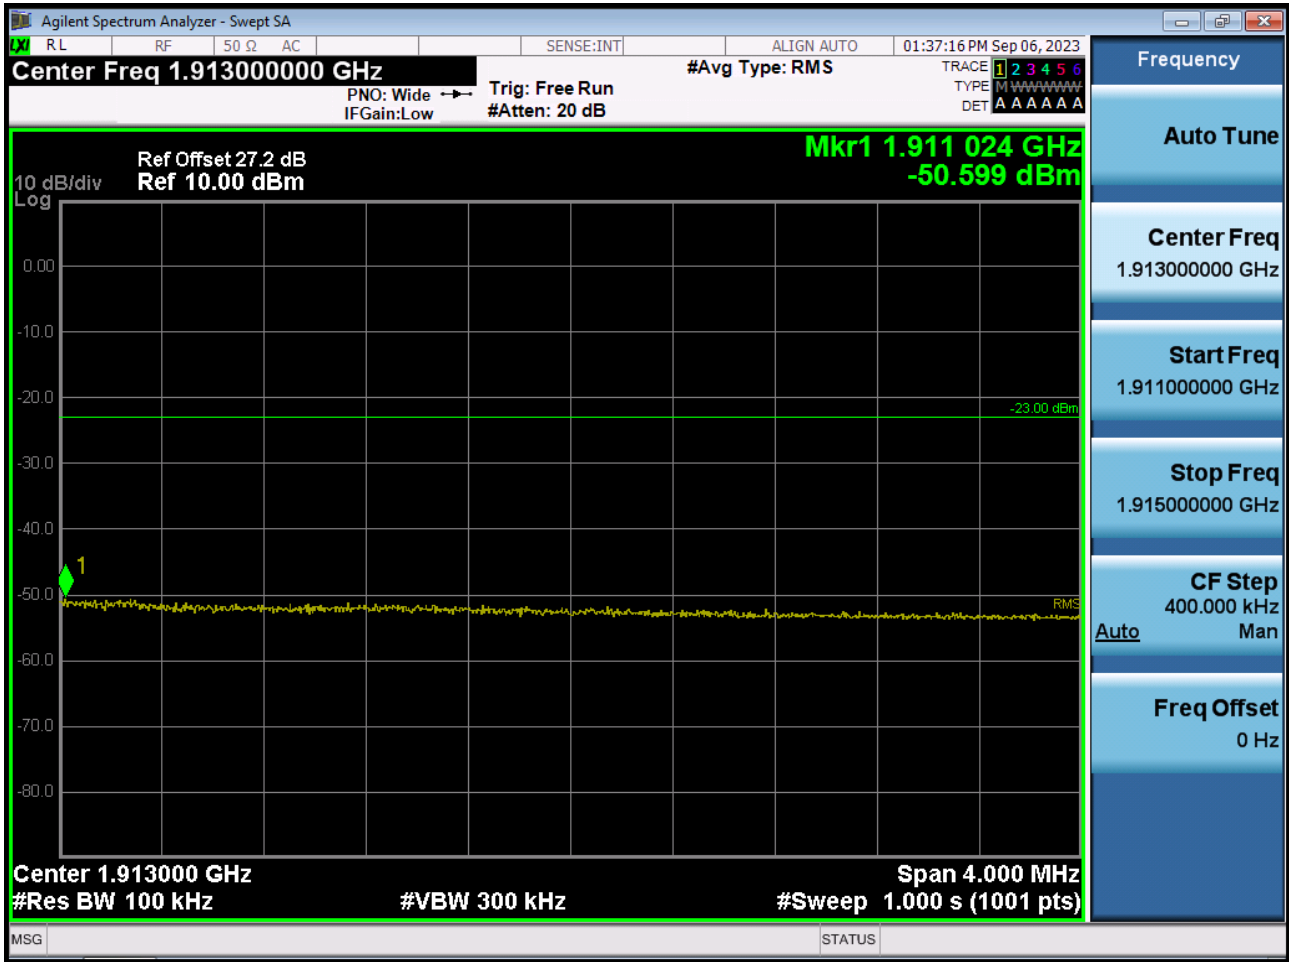


Note: We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -50.599 dBm + 10 dB = -40.599 dBm

■ WCDMA850 MODE (4132 CH.) Block Edge



■ WCDMA850MODE (4233 CH.) Block Edge

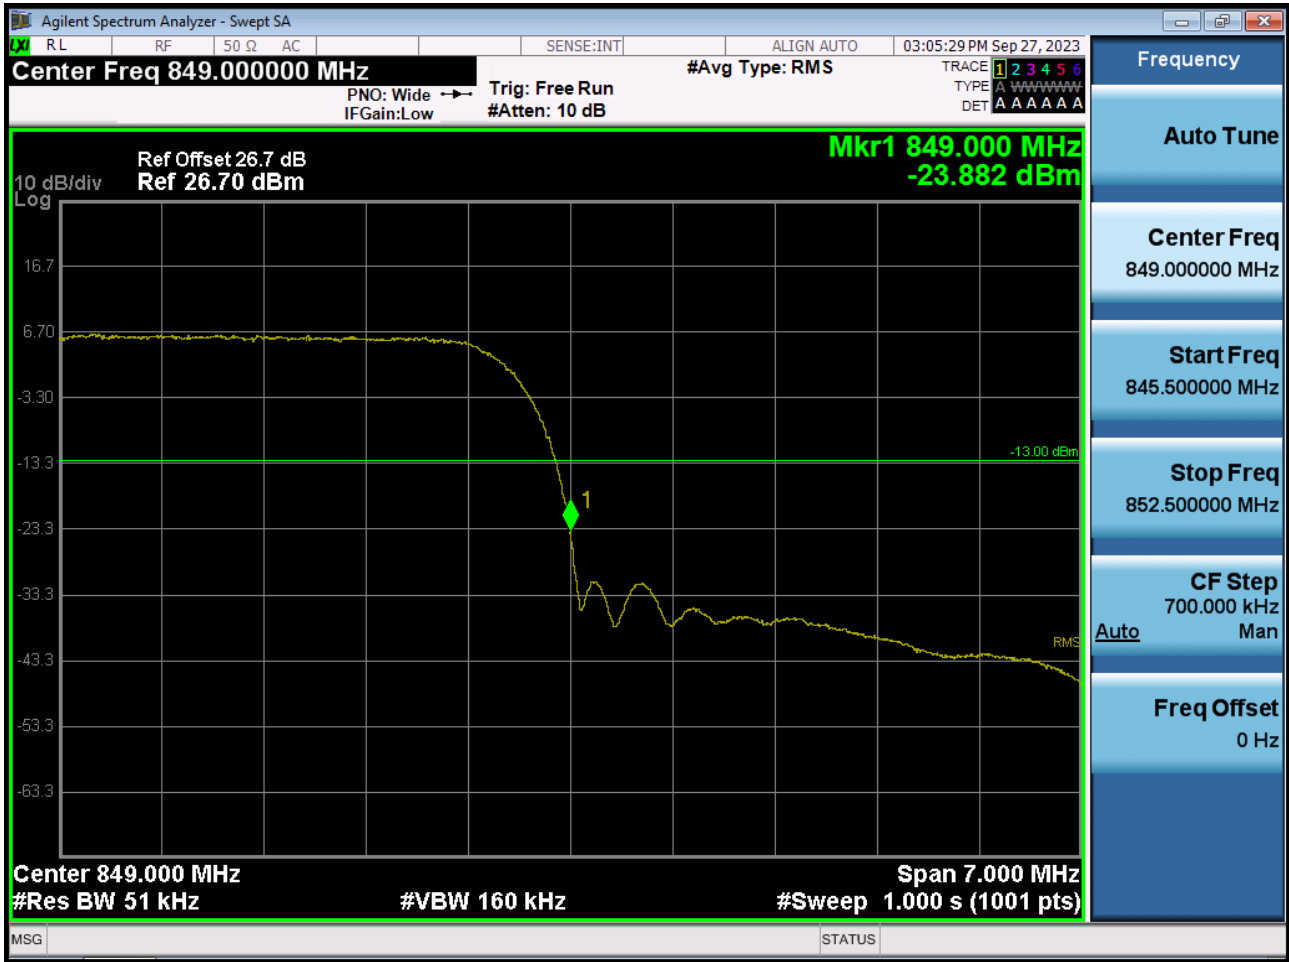


■ WCDMA850MODE (4233 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9262 CH.) Block Edge



■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span

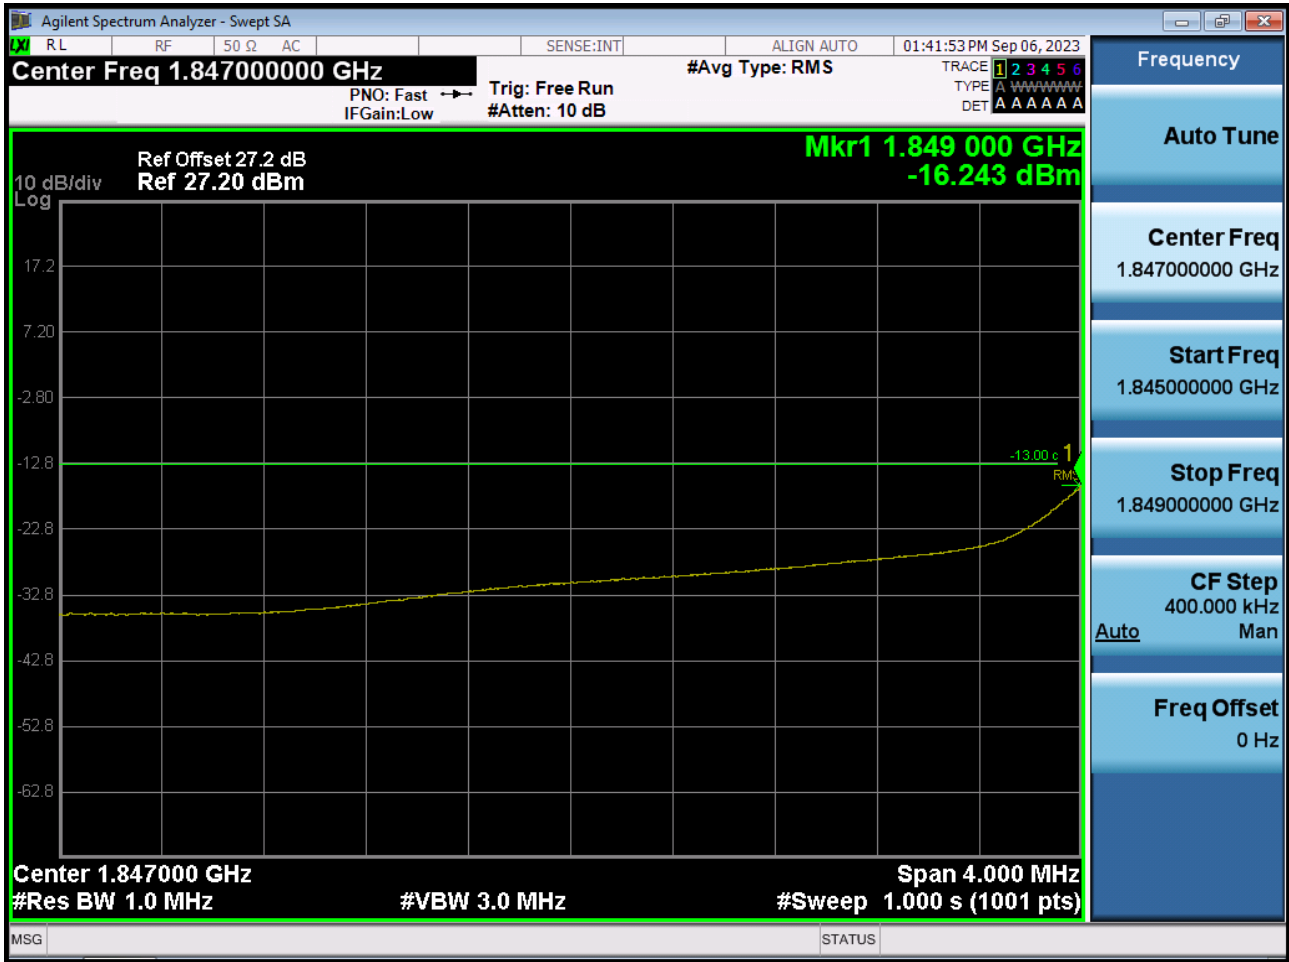


■ WCDMA1900 MODE (9538 CH.) Block Edge




■ WCDMA1700 MODE (1312 CH.) Block Edge




■ WCDMA1700 MODE (1312 CH.) – 4 MHz Span

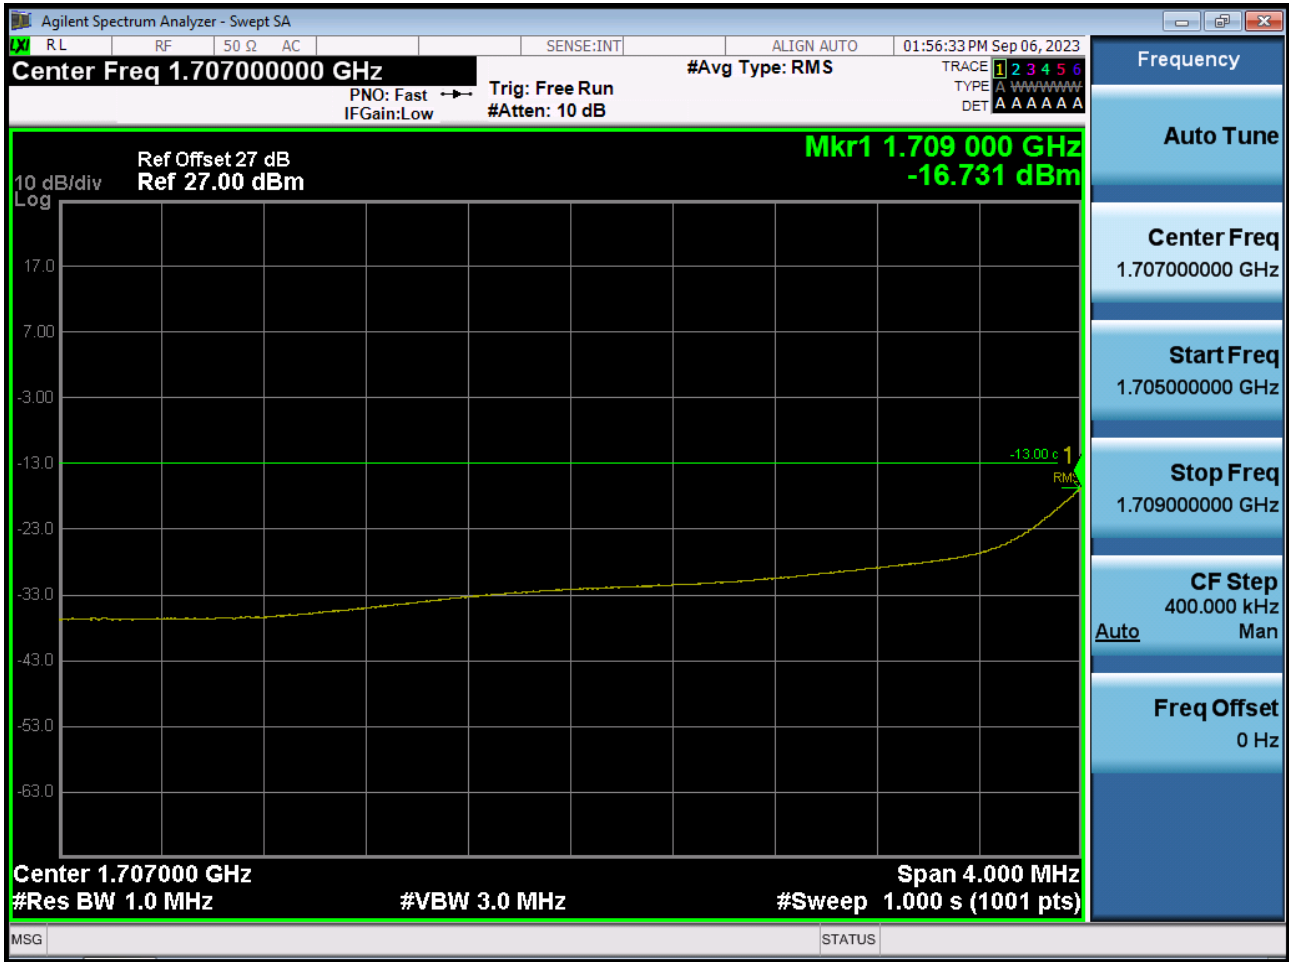


■ WCDMA1700 MODE (1513 CH.) – 4 MHz Span

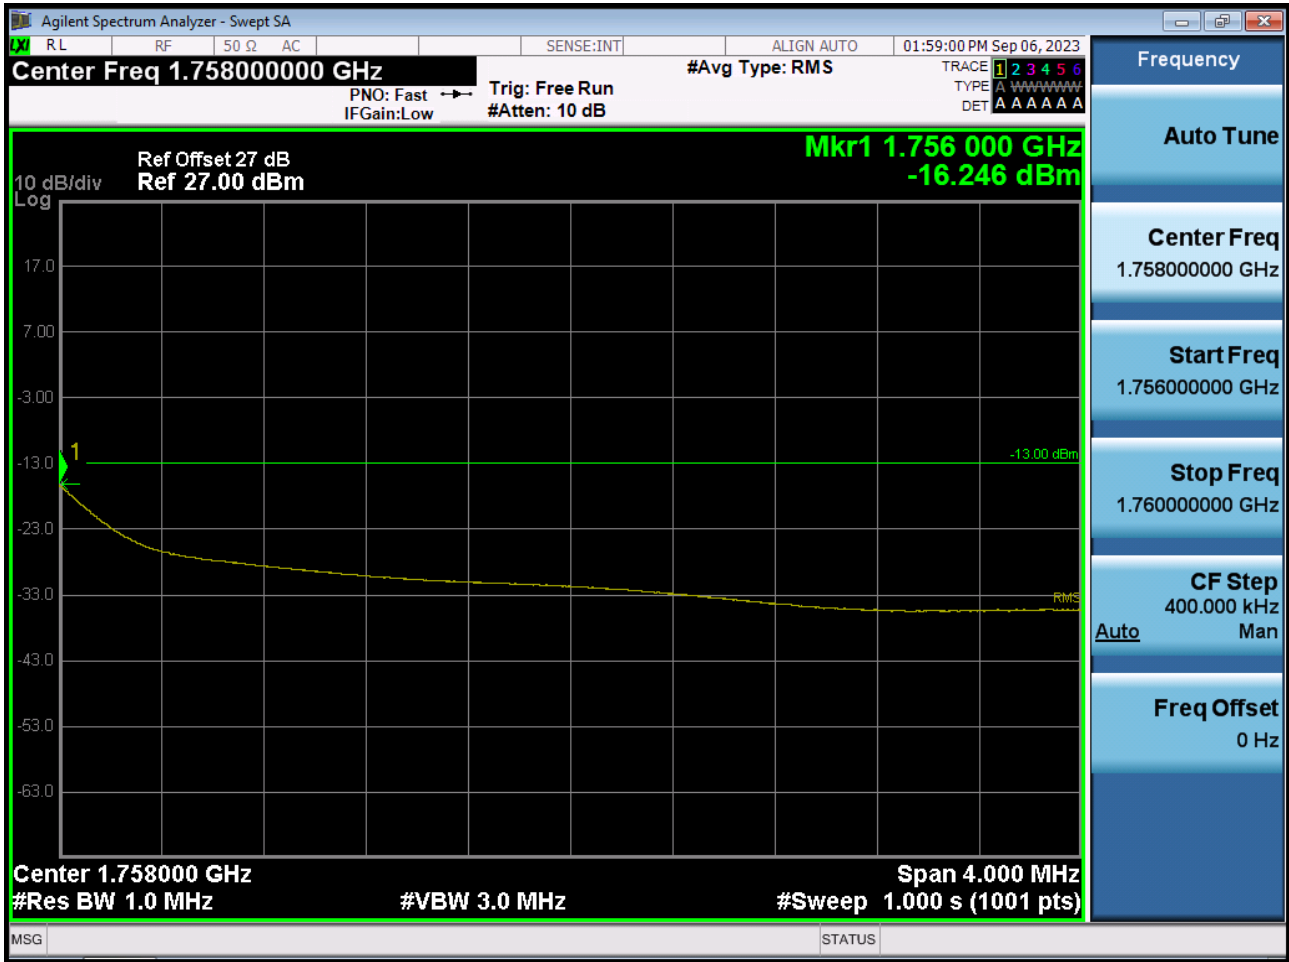


■ GSM850 MODE (251 CH.) Conducted Spurious Emissions

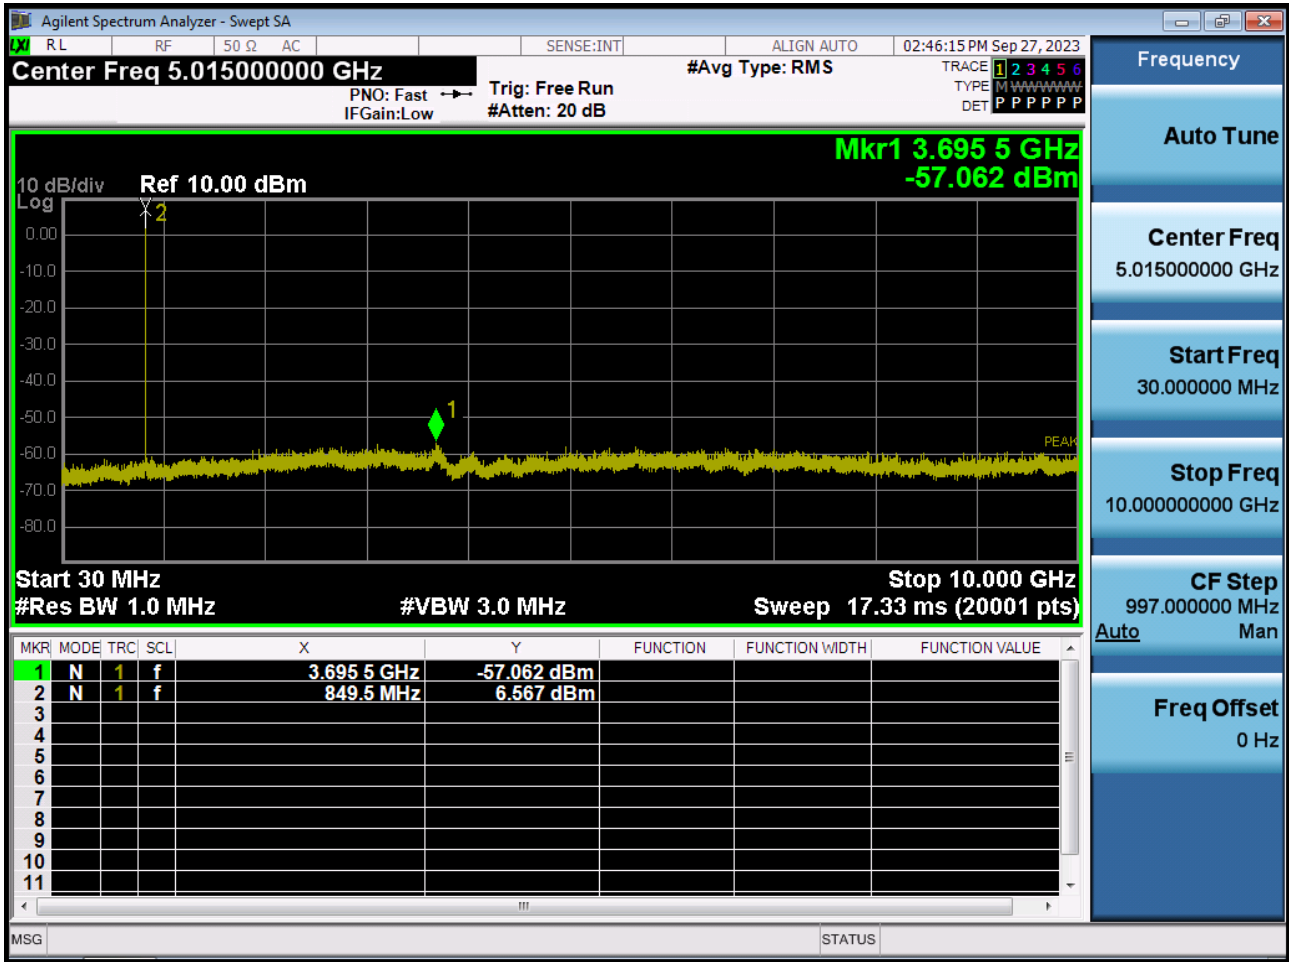


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

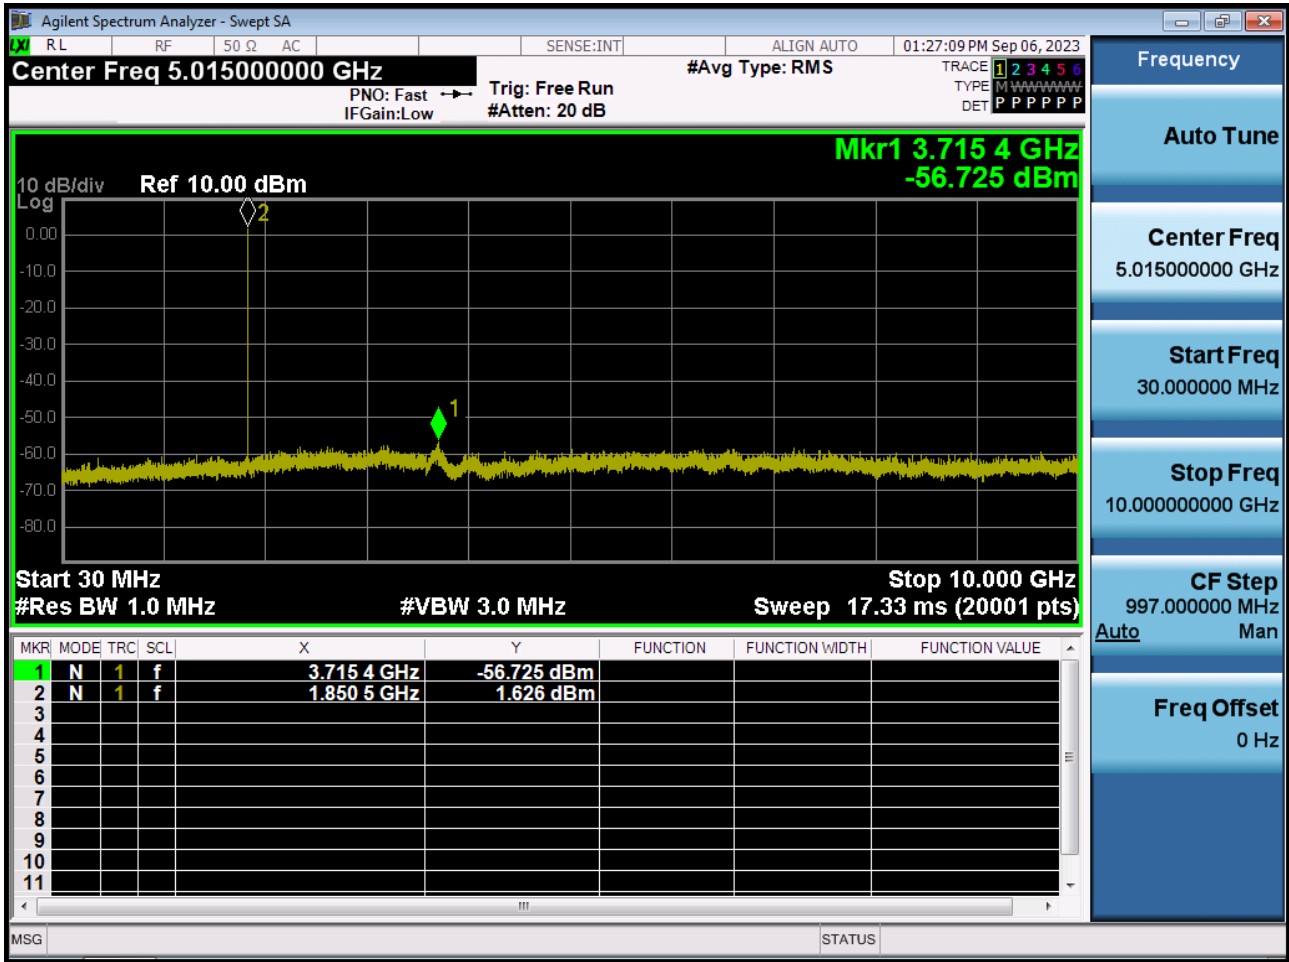


■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions2

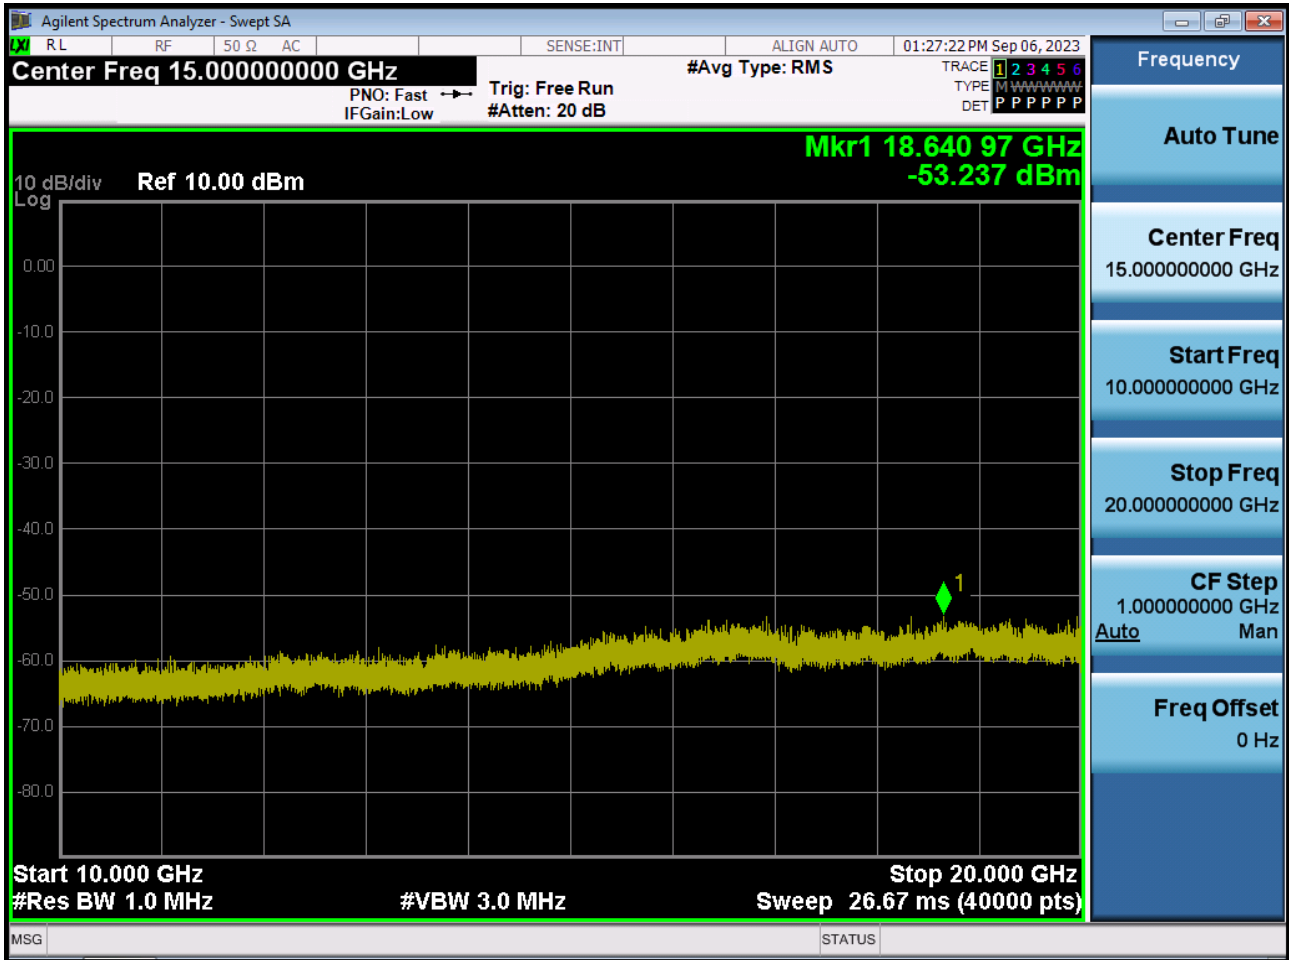


■ GSM1900 MODE (661 CH) Conducted Spurious Emissions1

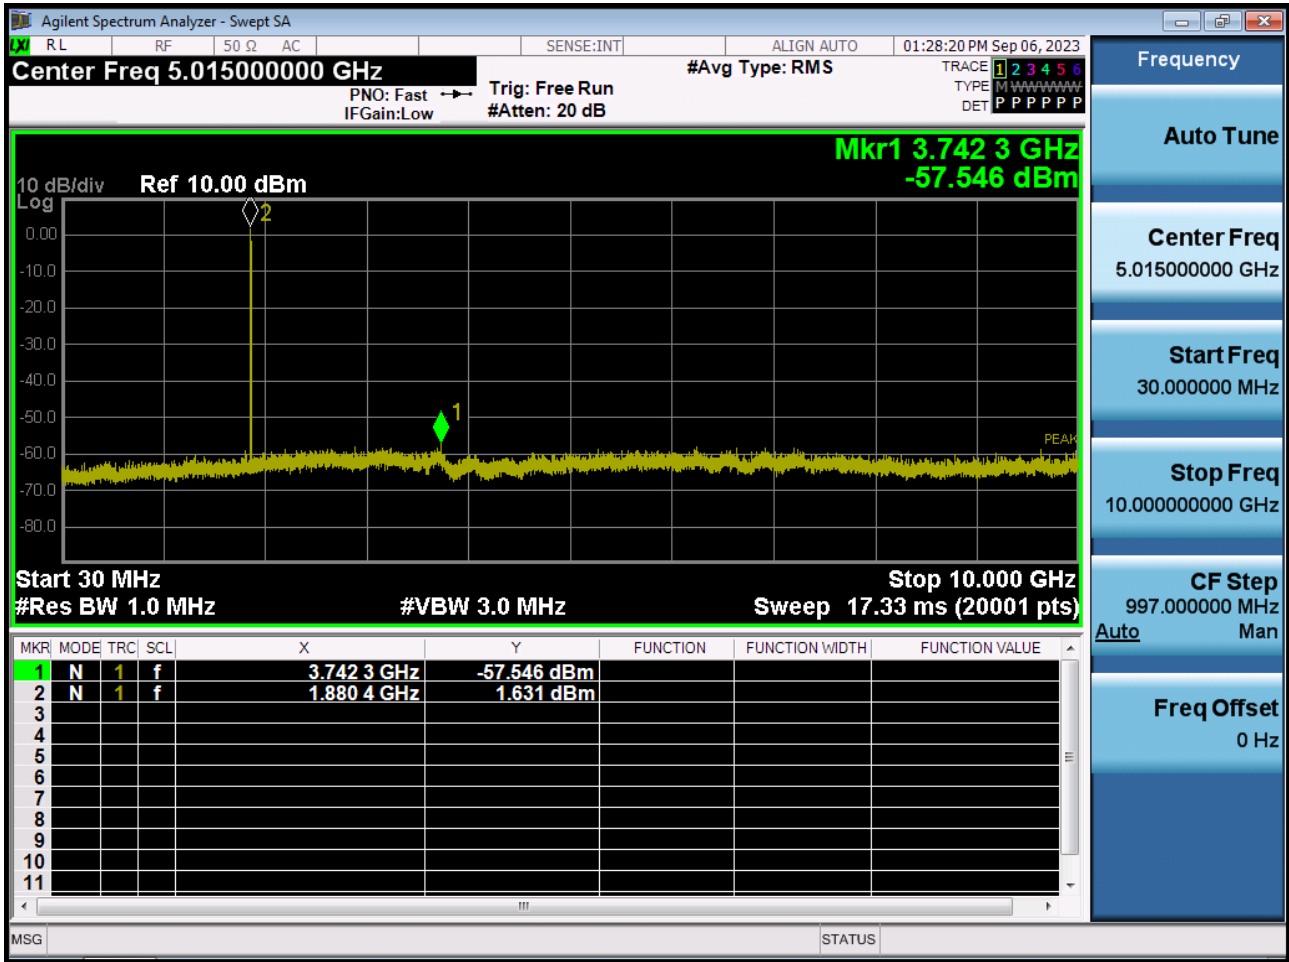


■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2

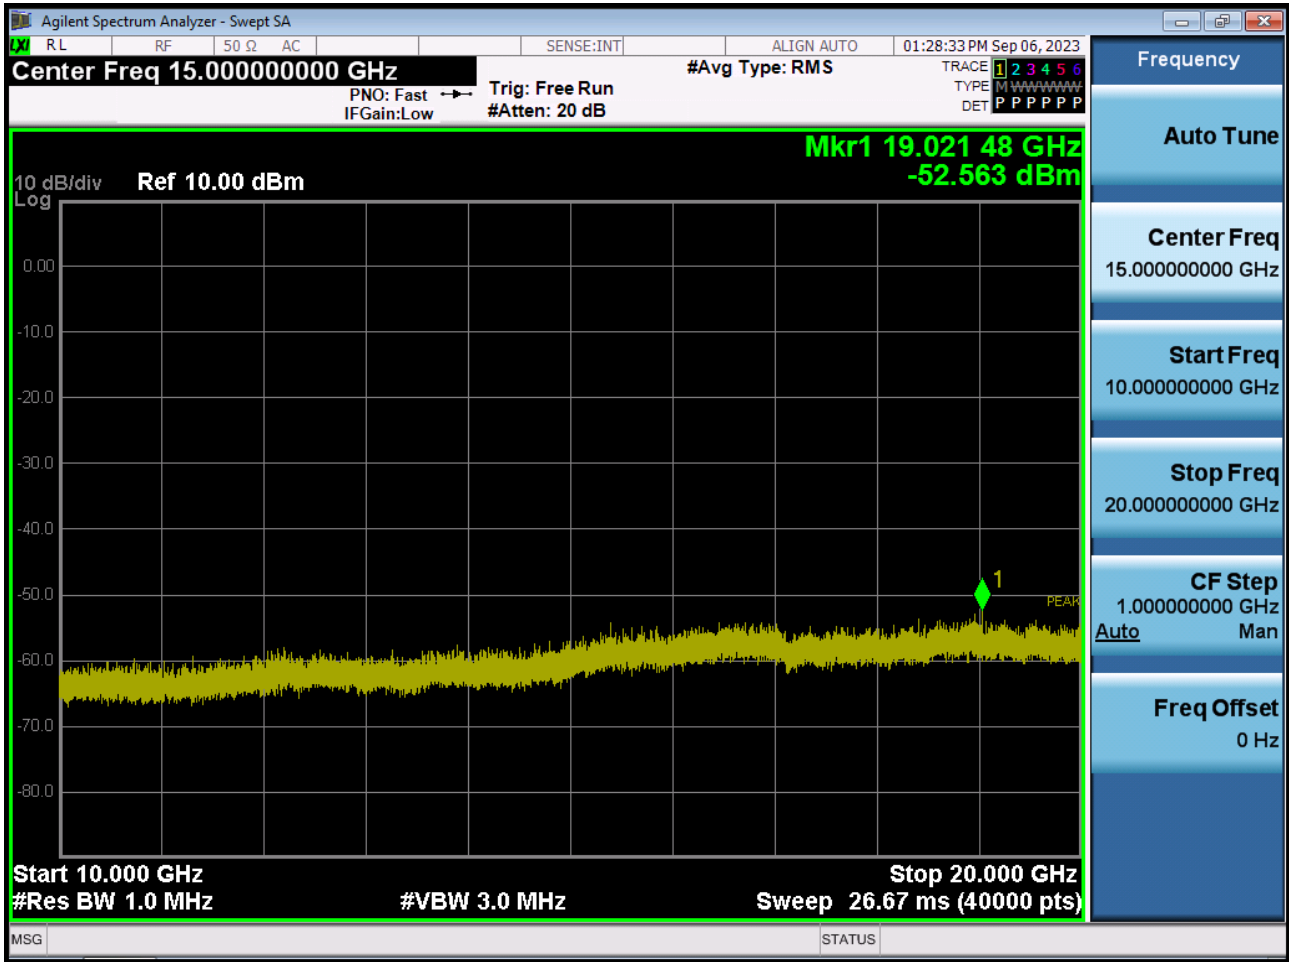


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions1

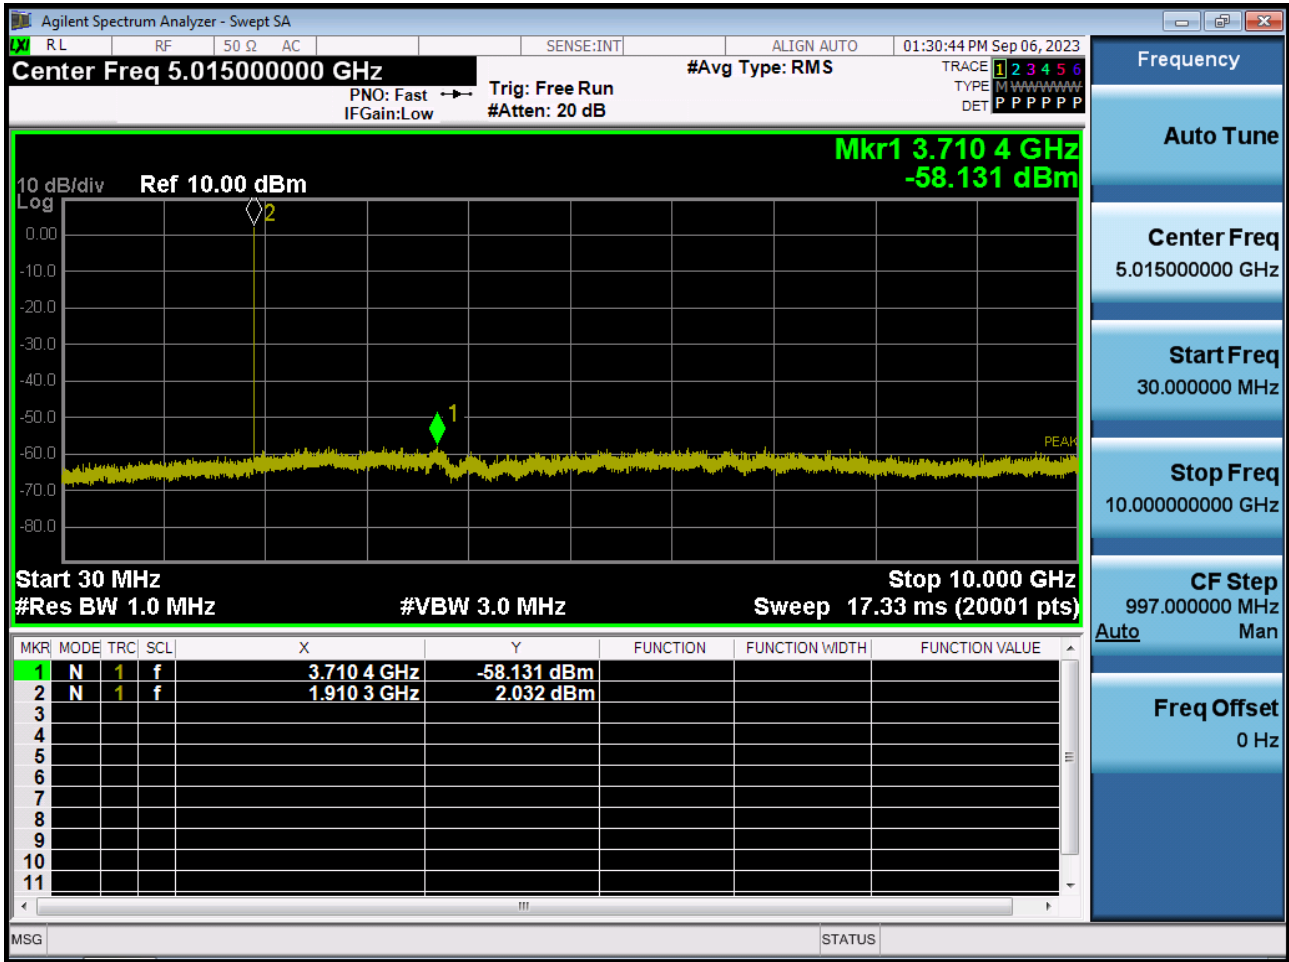


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions2

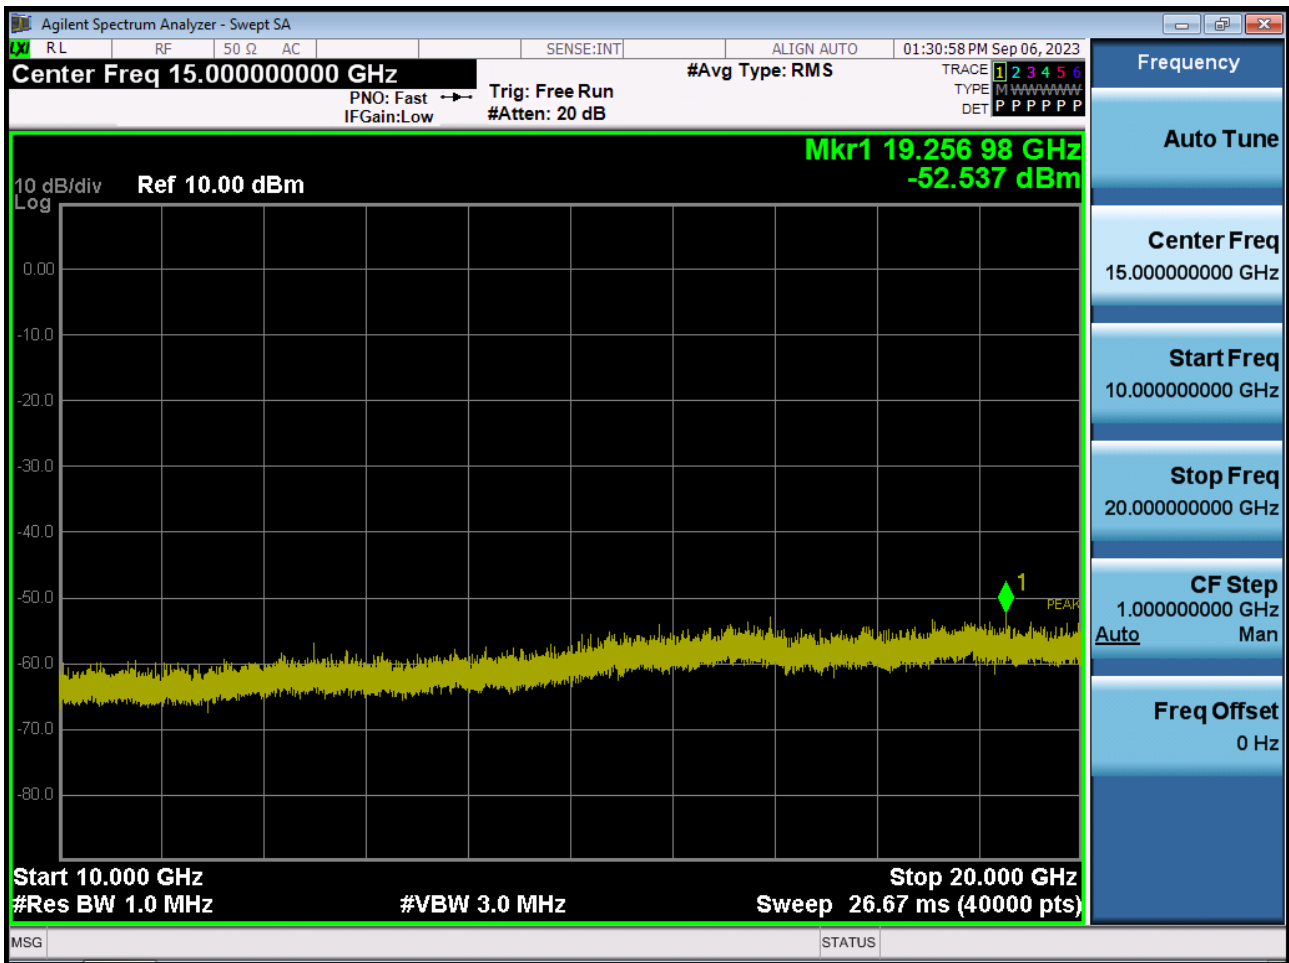


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions

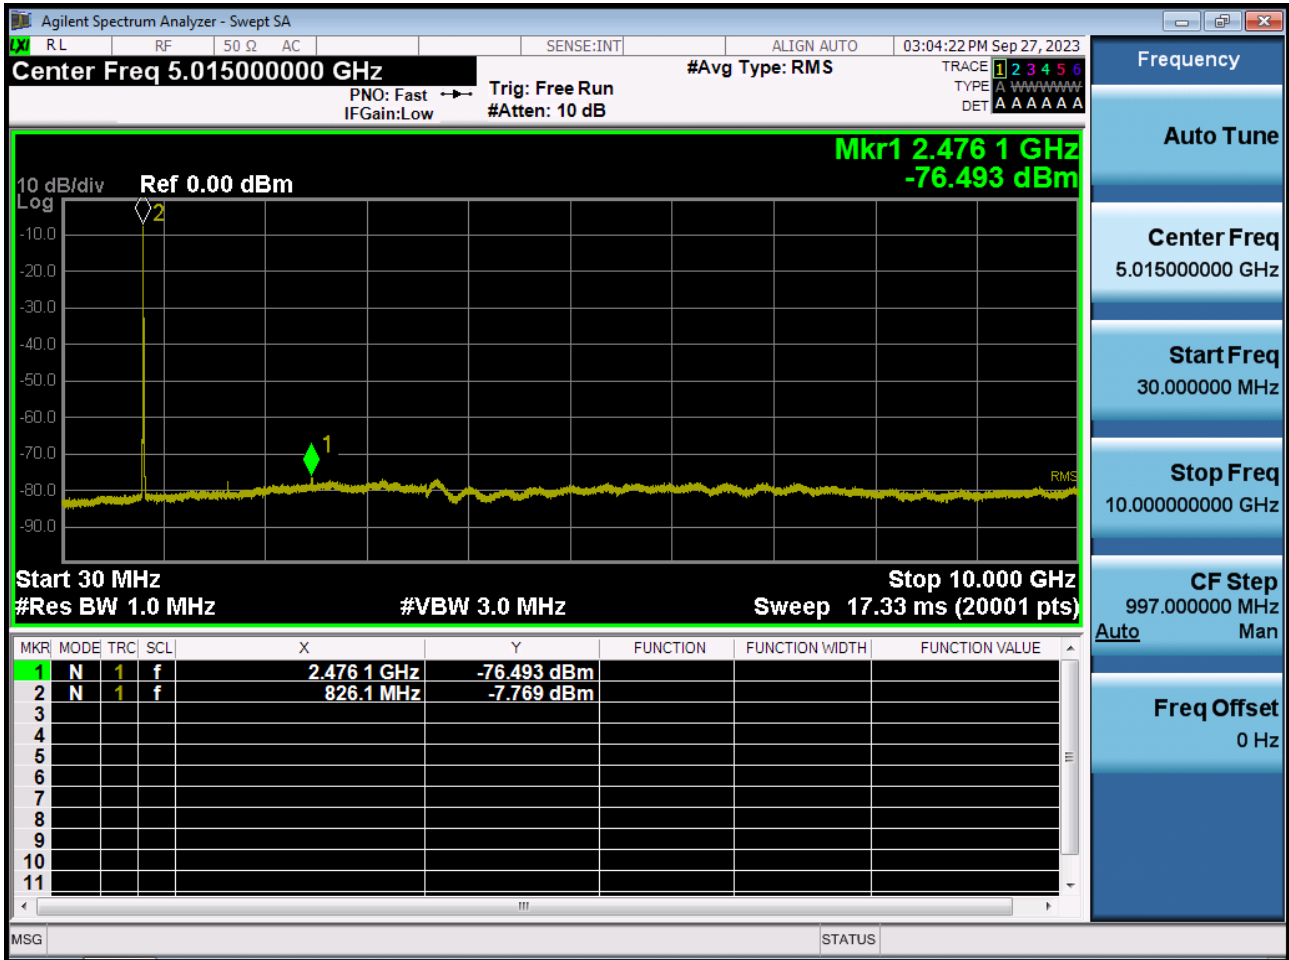


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions

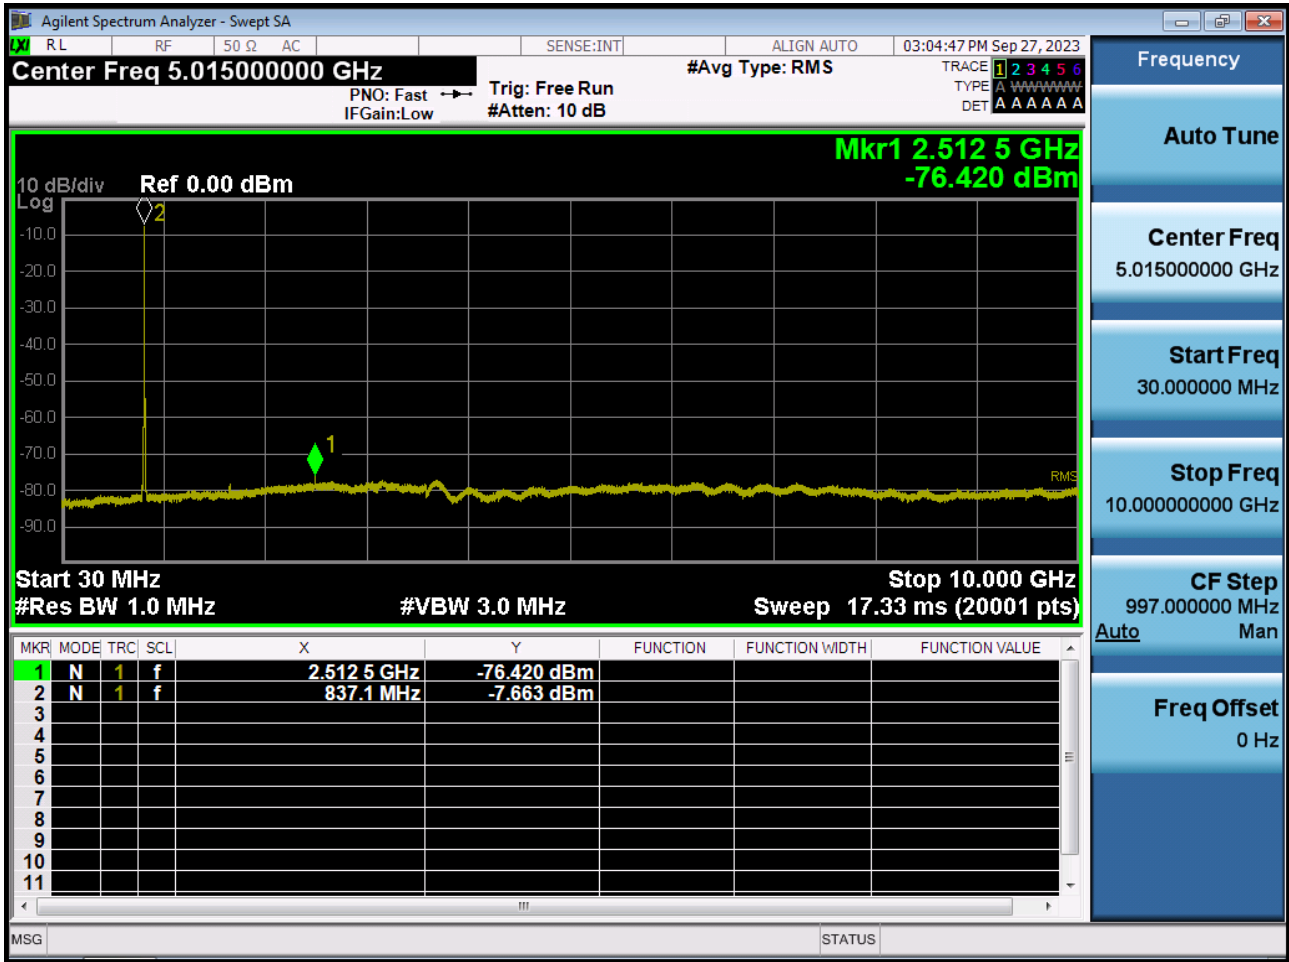

■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions

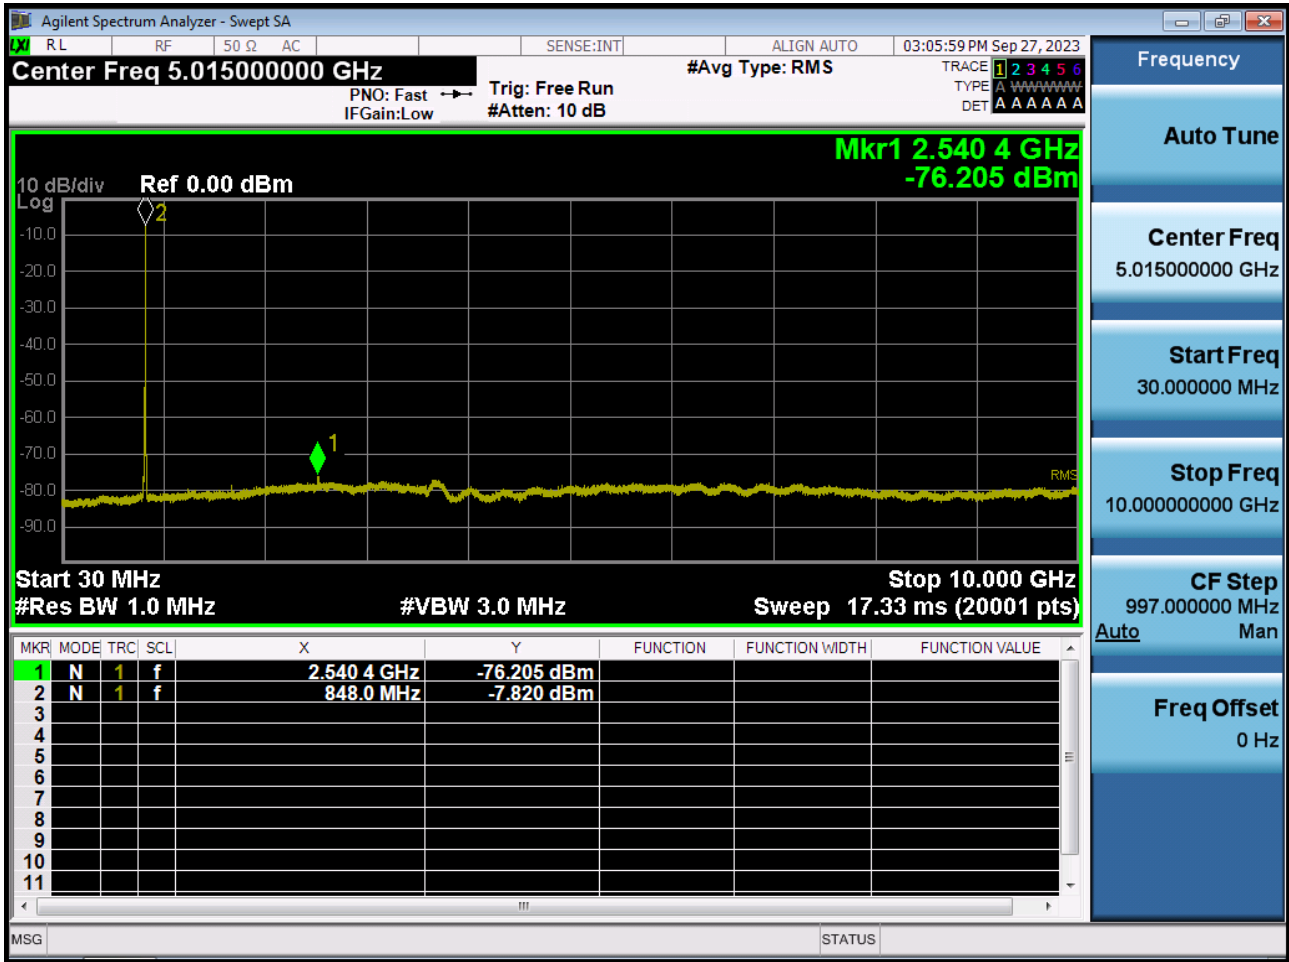


■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

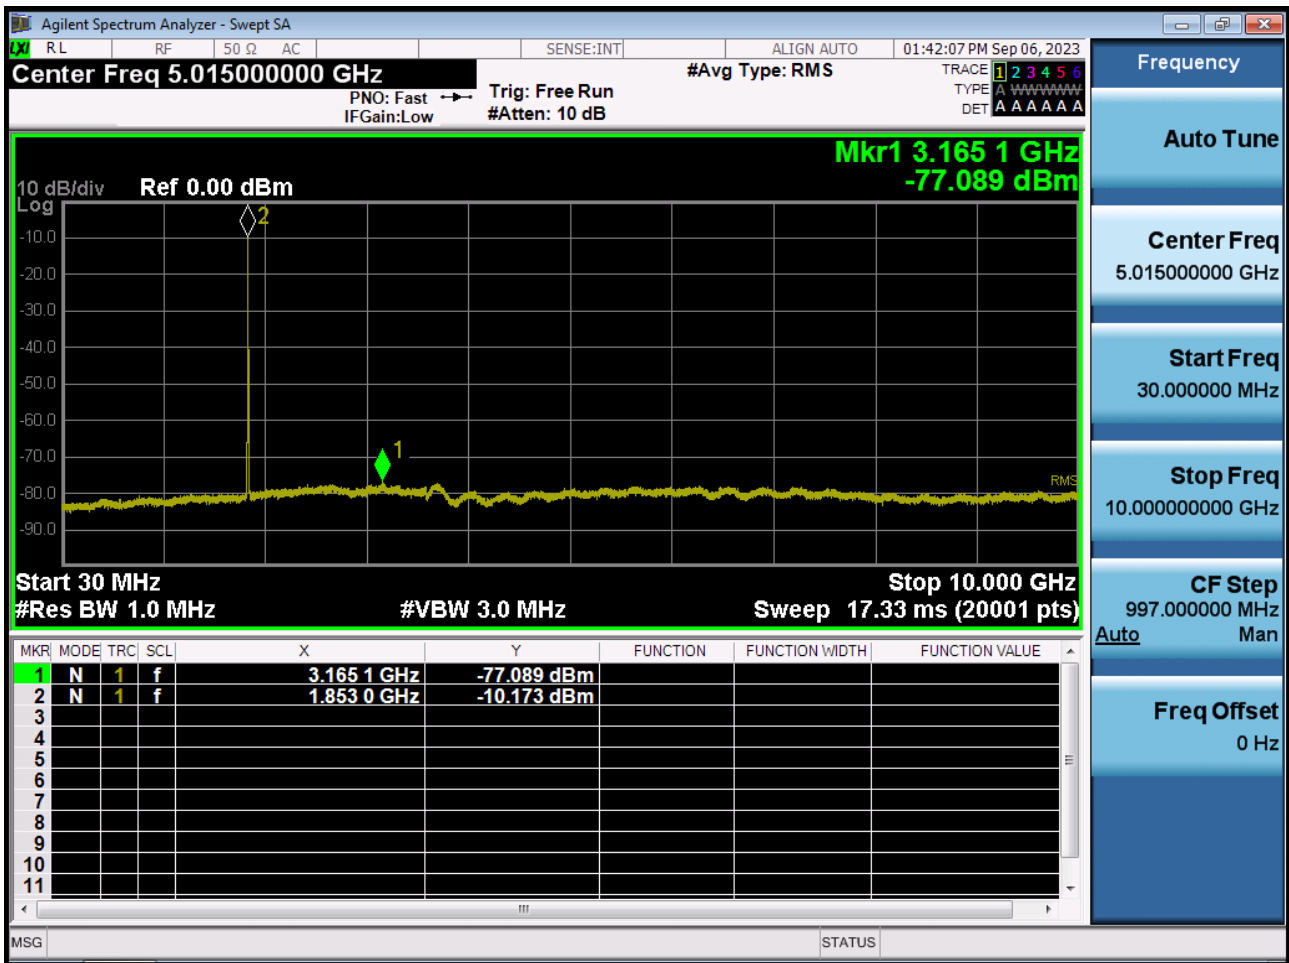

■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions2




■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1

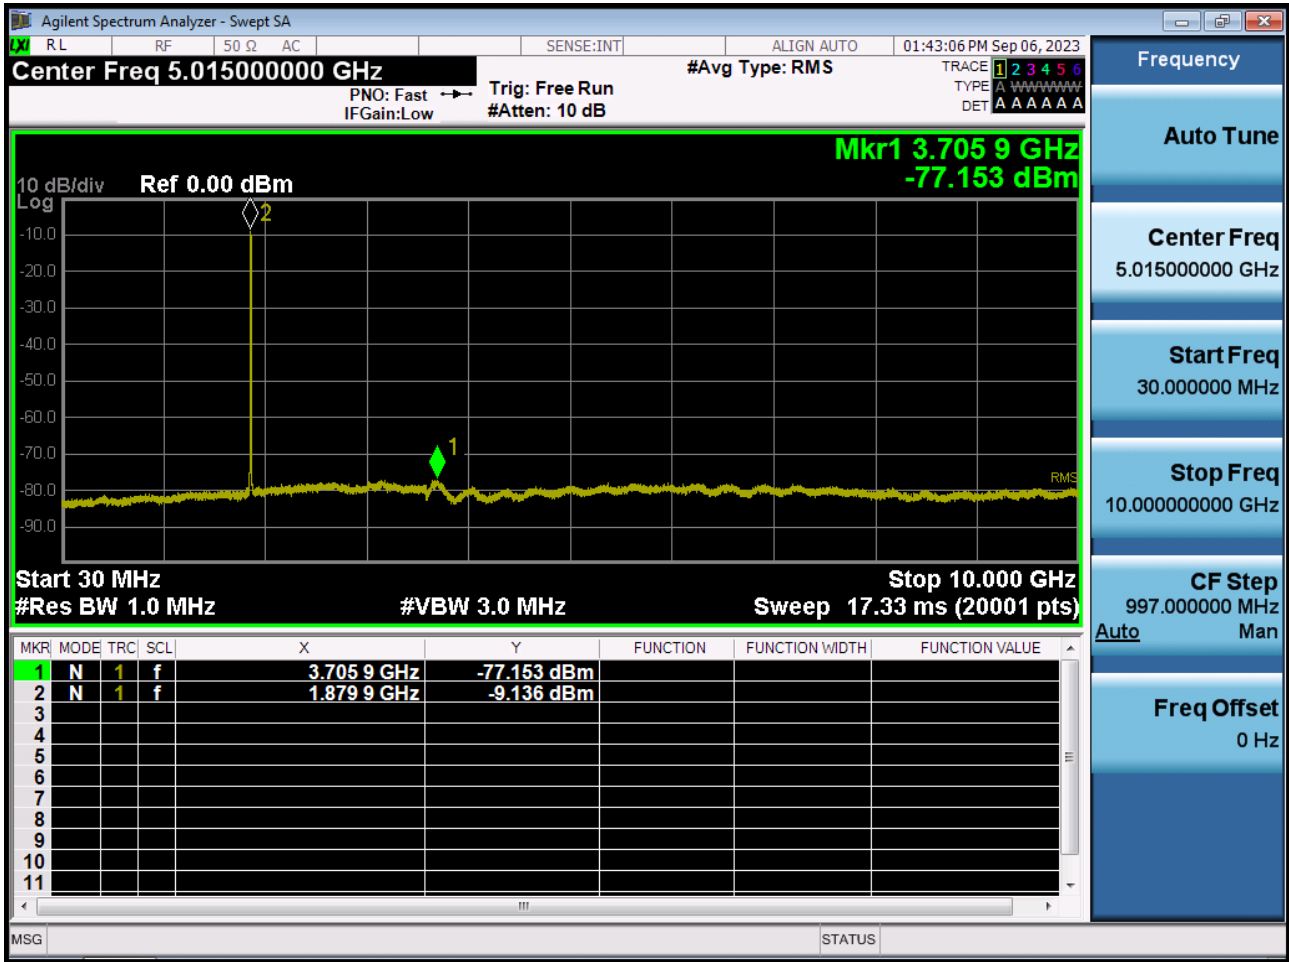


■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions2




■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

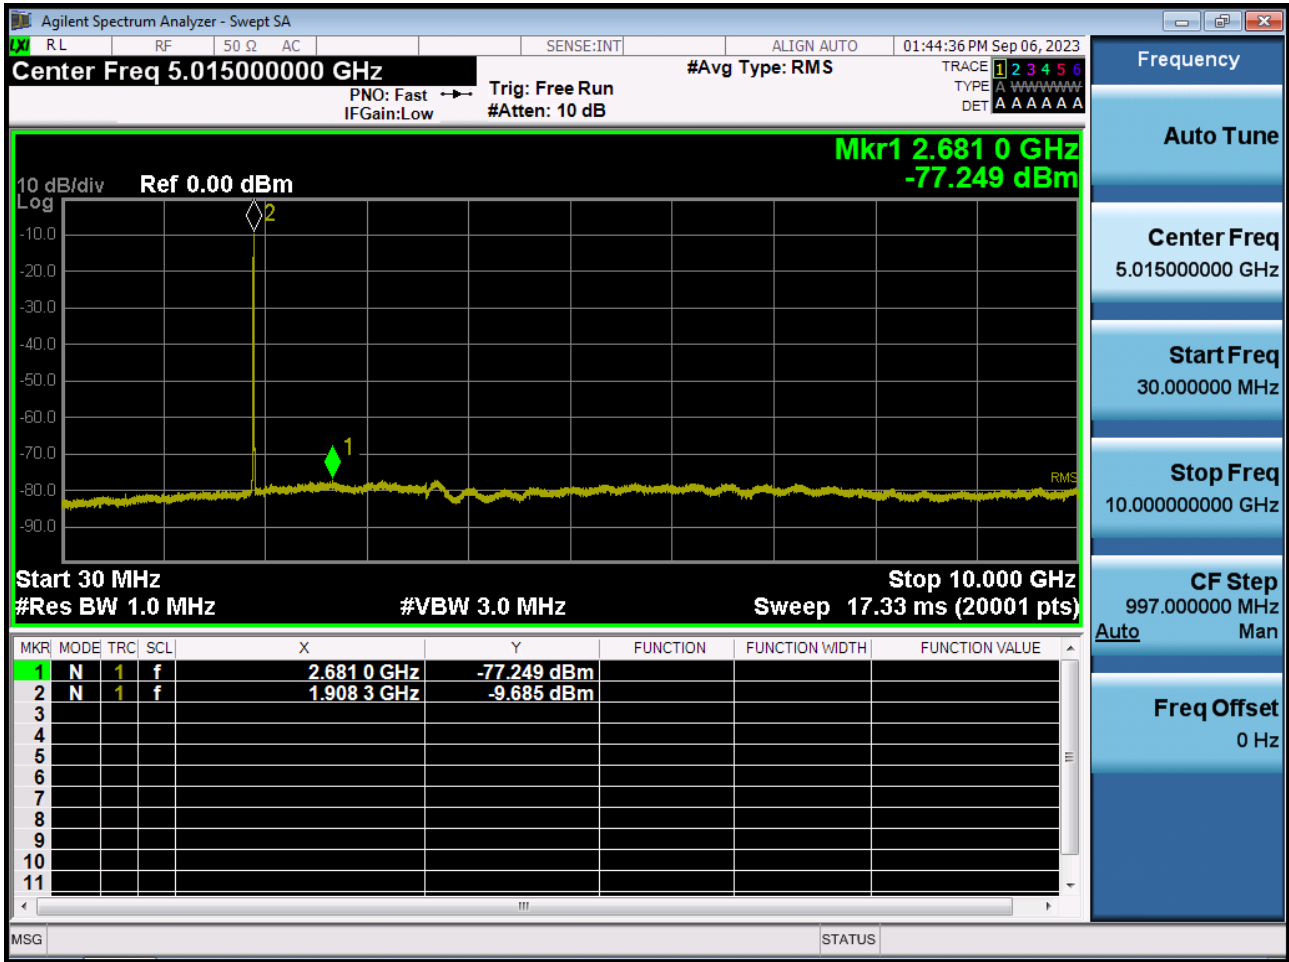

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions2

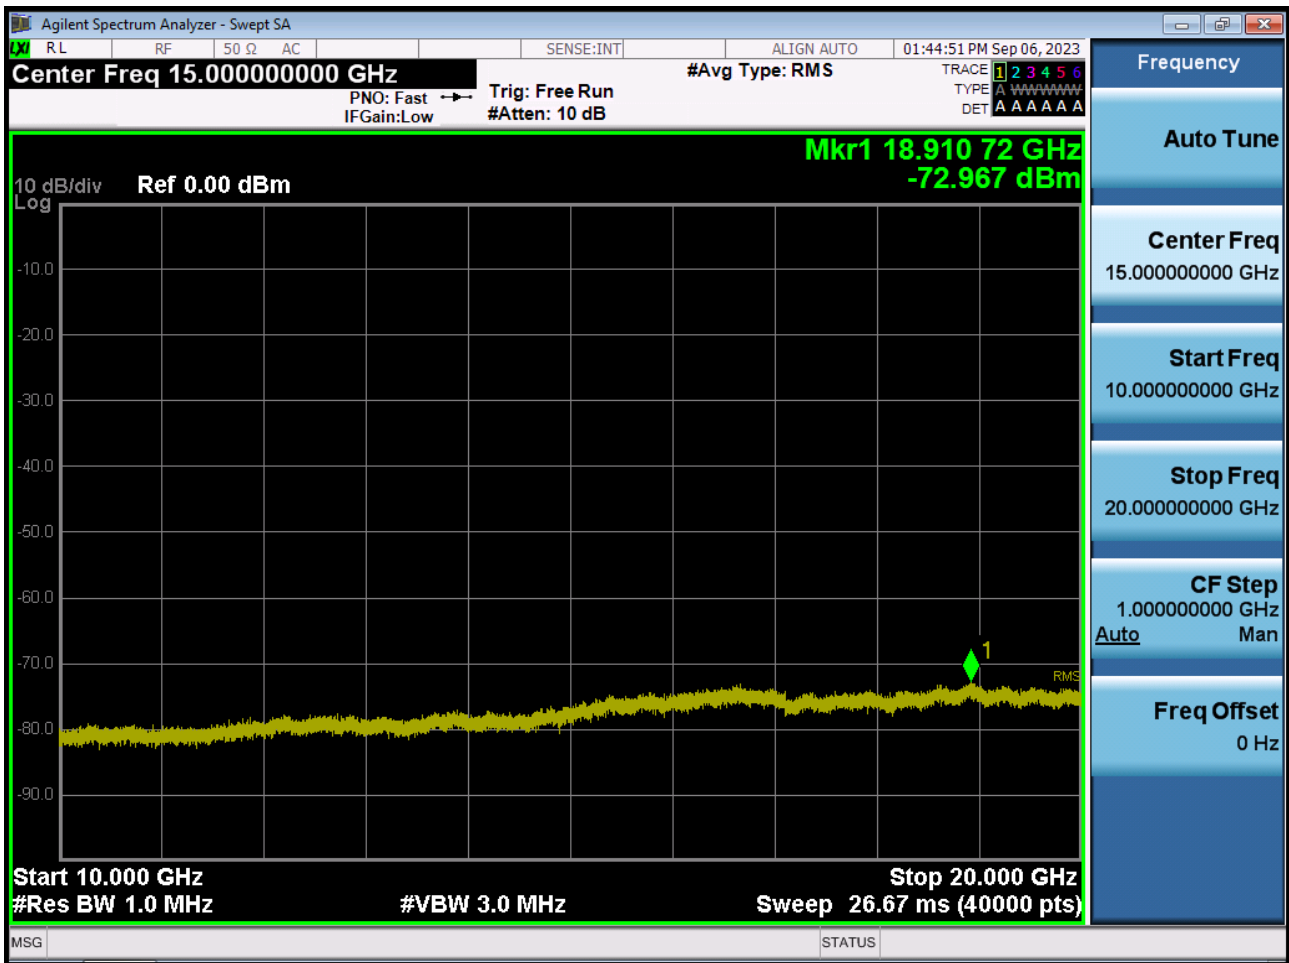


■ WCDMA1700 MODE (1312 CH.) Conducted Spurious Emissions1

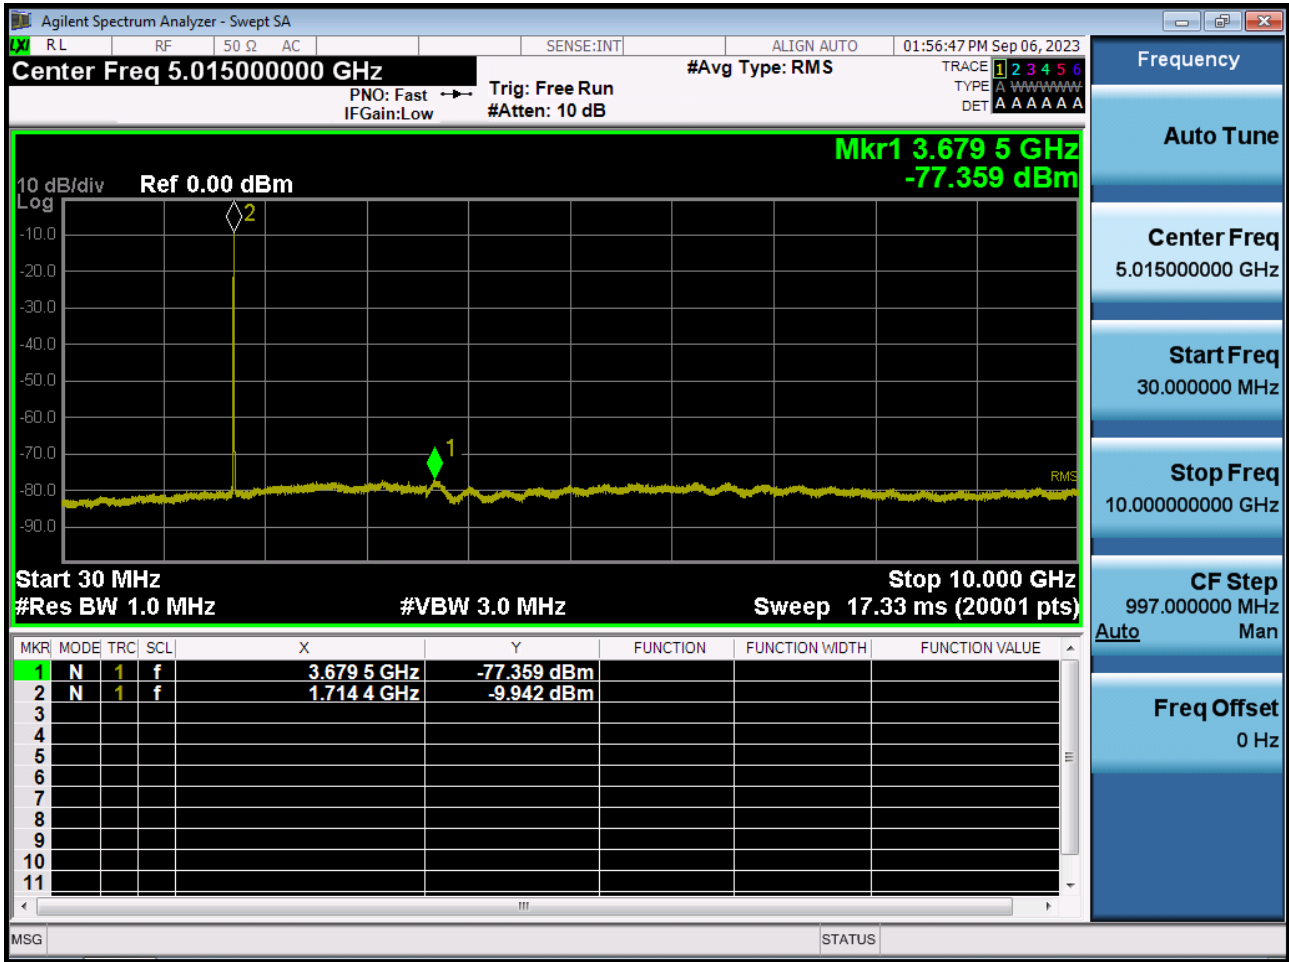


■ WCDMA1700 MODE (1312 CH.) Conducted Spurious Emissions2




■ WCDMA1700 MODE (1412 CH.) Conducted Spurious Emissions1

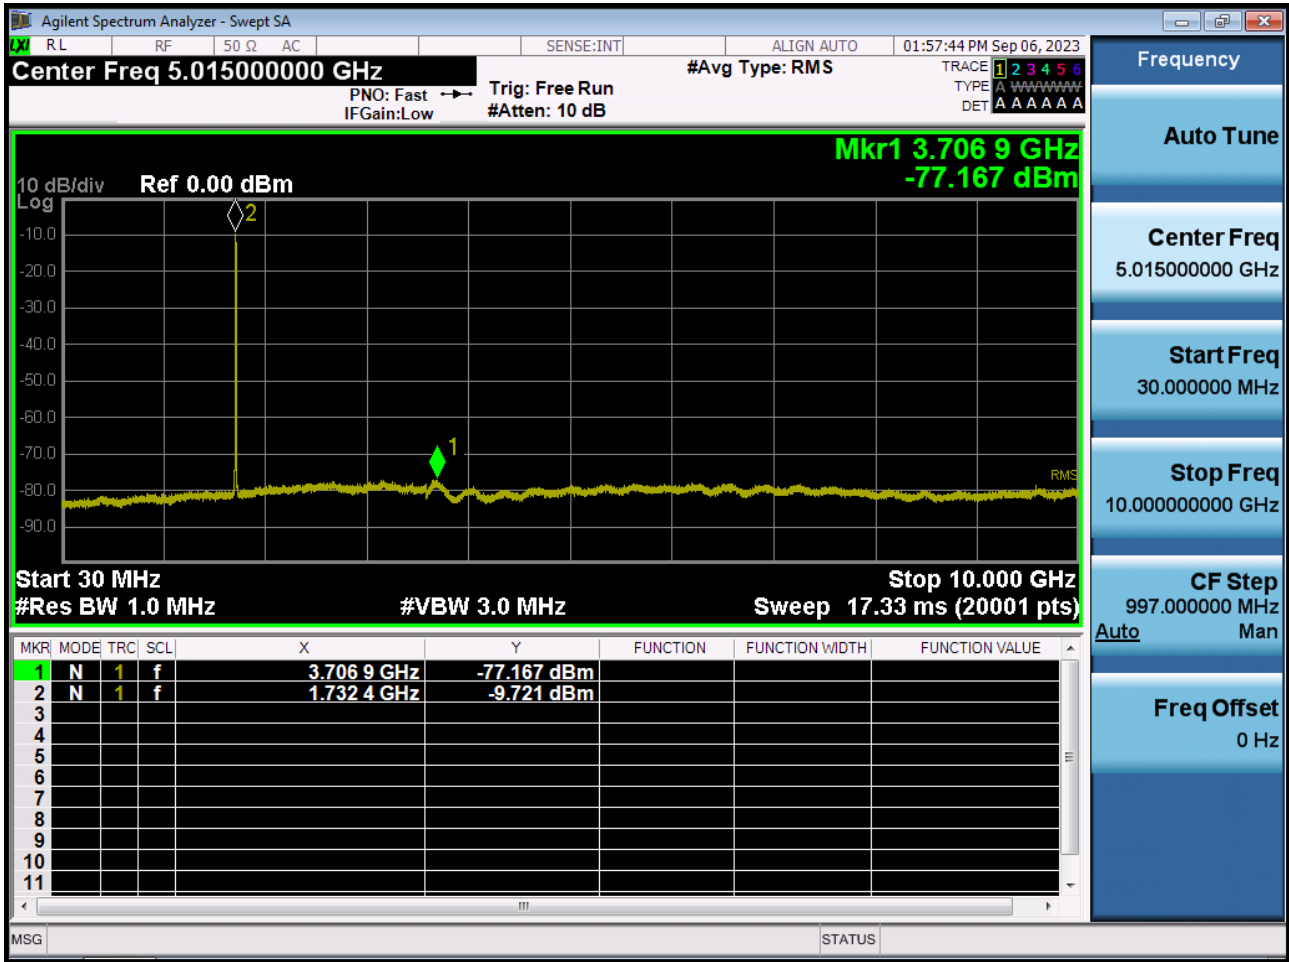

■ WCDMA1700 MODE (1412 CH.) Conducted Spurious Emissions2

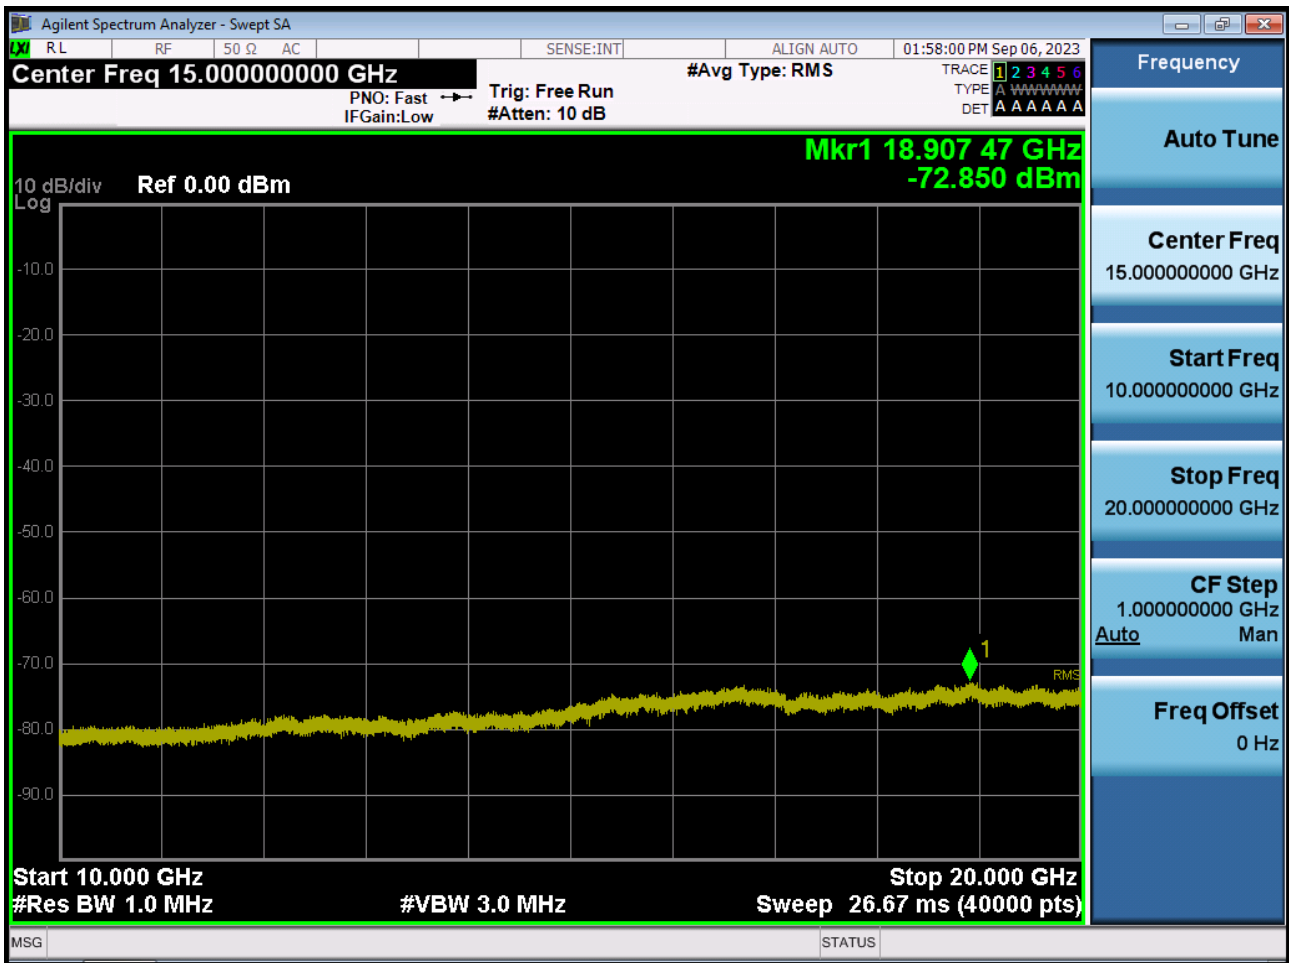

■ WCDMA1700 MODE (1513 CH.) Conducted Spurious Emissions1

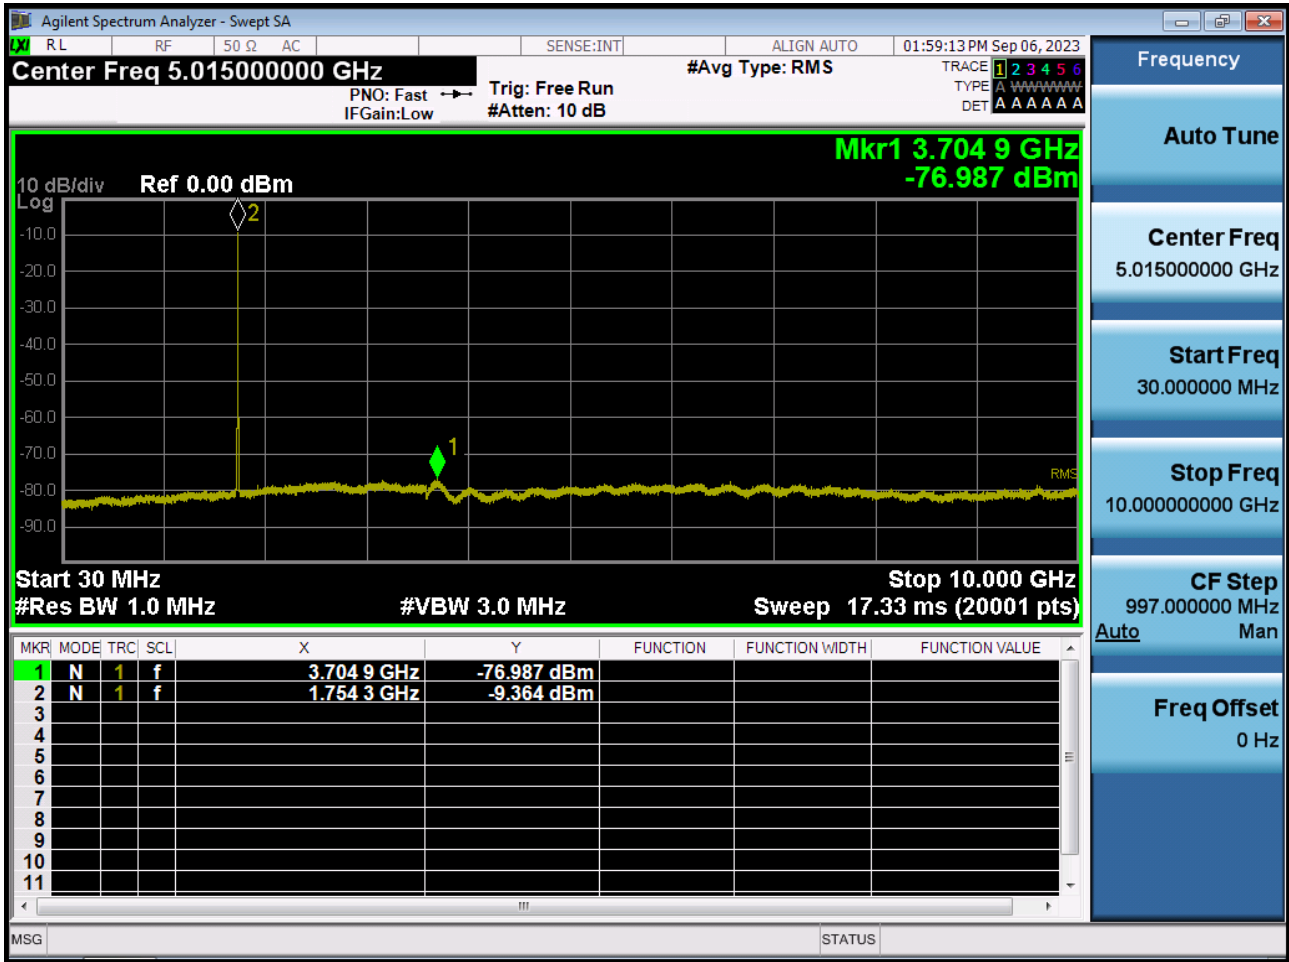


■ WCDMA1700 MODE (1513 CH.) Conducted Spurious Emissions2




11. TEST PLOTS(Sub 1 Ant)


■ GSM850 MODE (128 CH.) Occupied Bandwidth

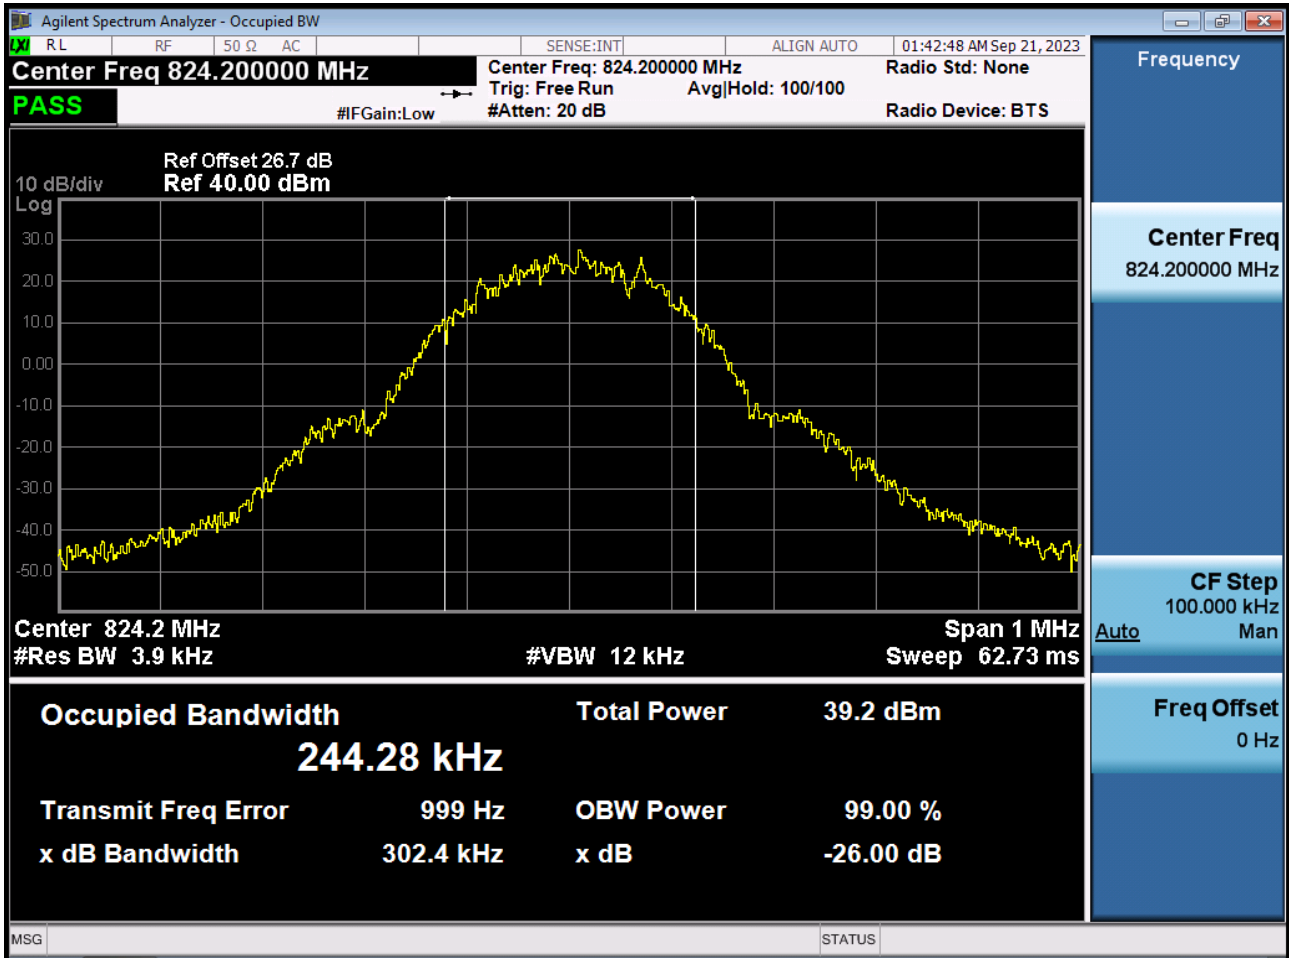


■ GSM850 MODE (190 CH.) Occupied Bandwidth

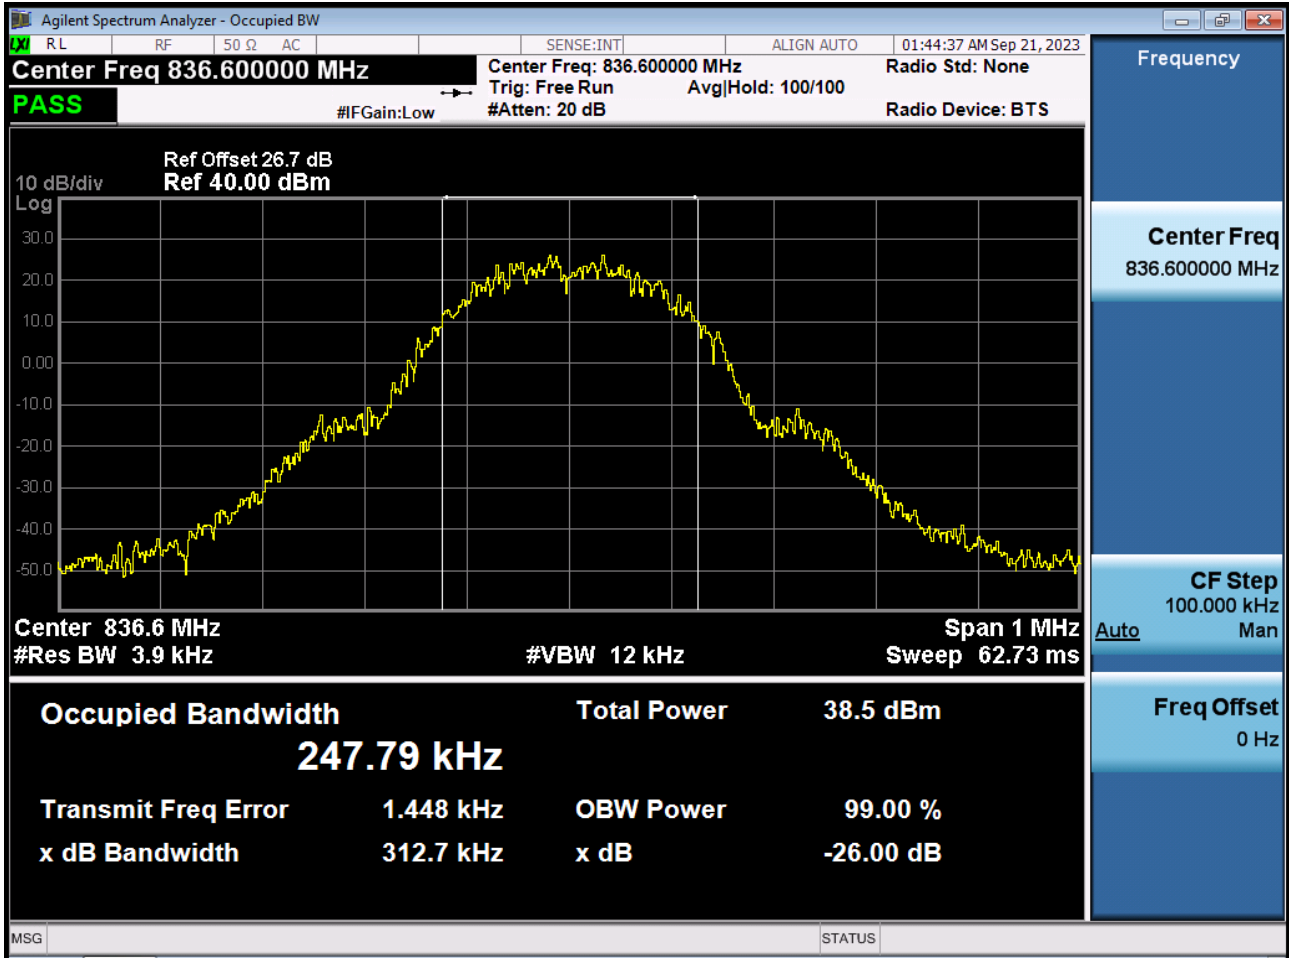


■ GSM850 MODE (251 CH.) Occupied Bandwidth

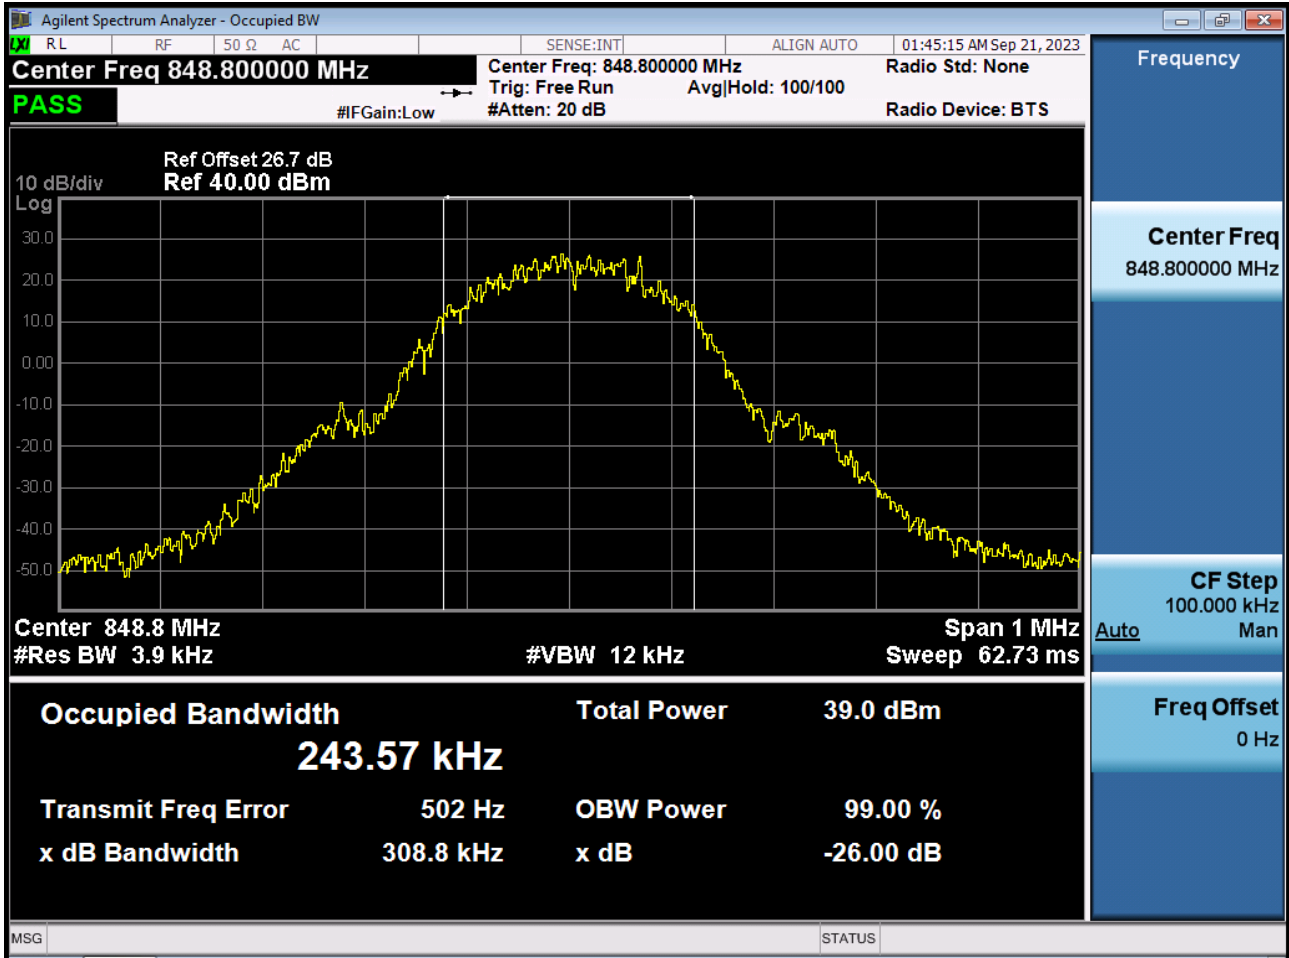


■ GSM850 EDGE (251 CH.) Occupied Bandwidth

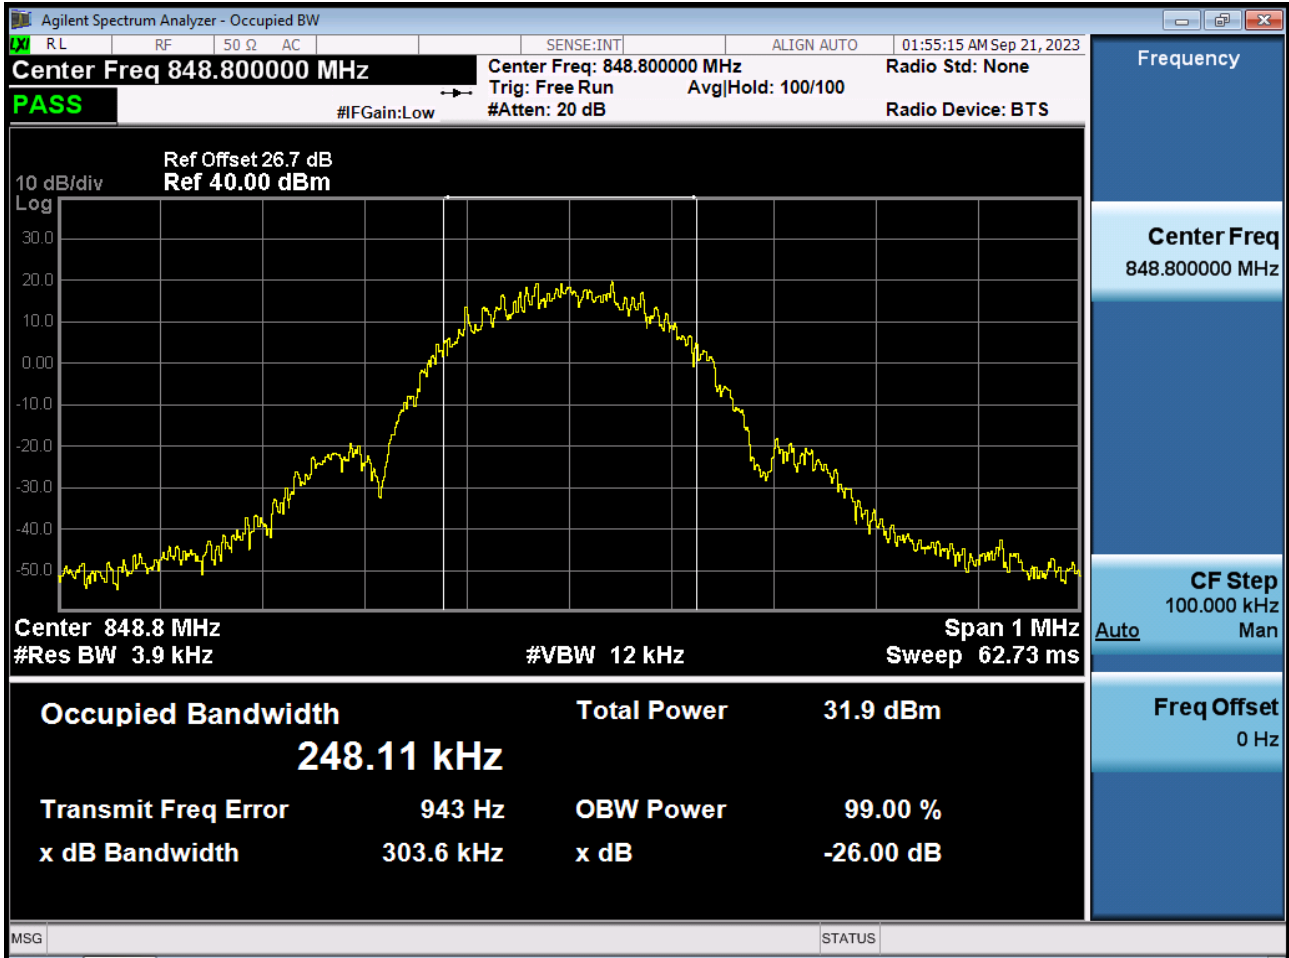

■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

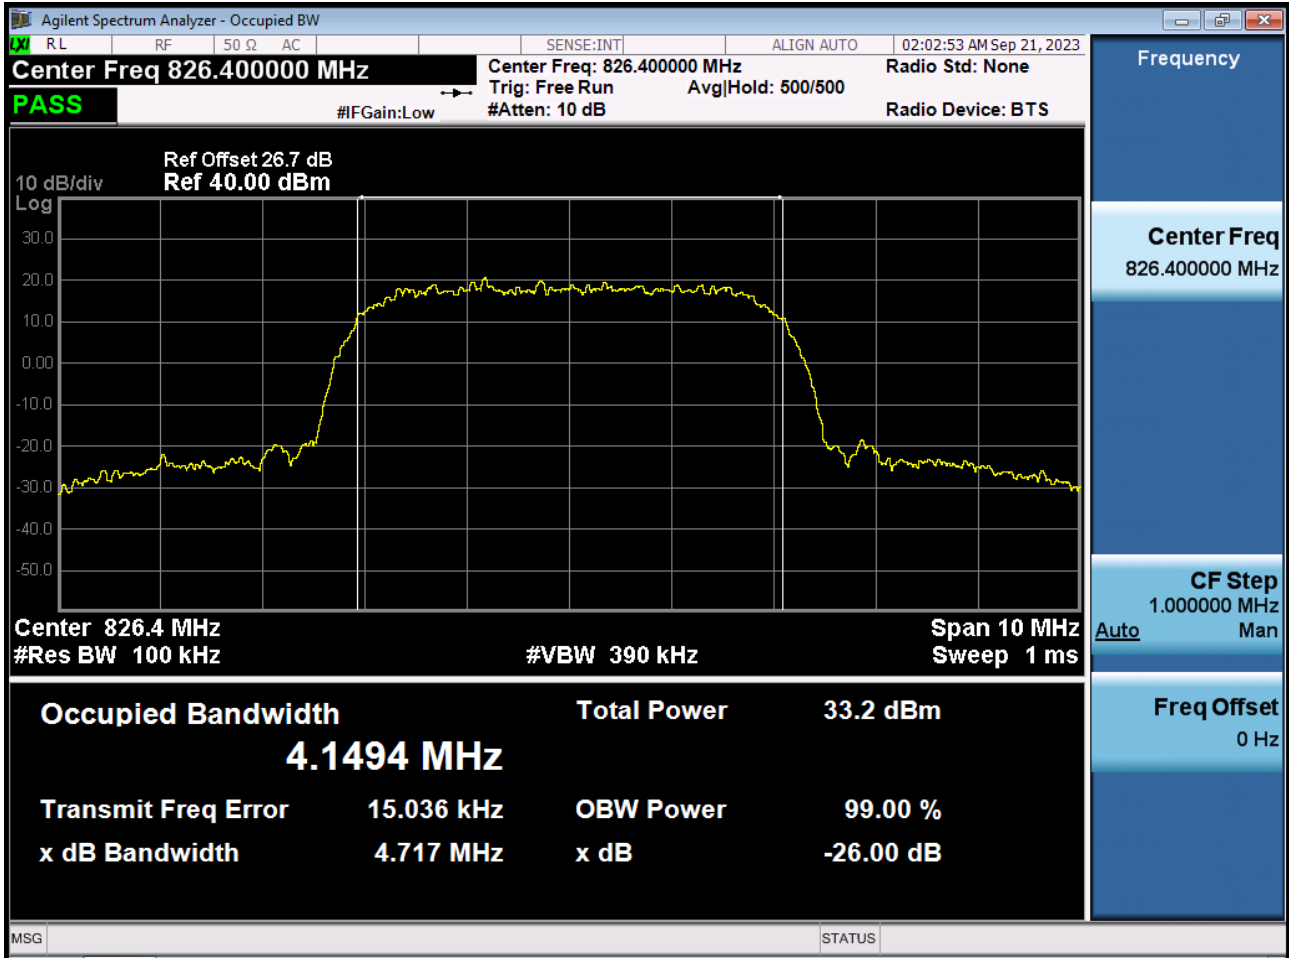

■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

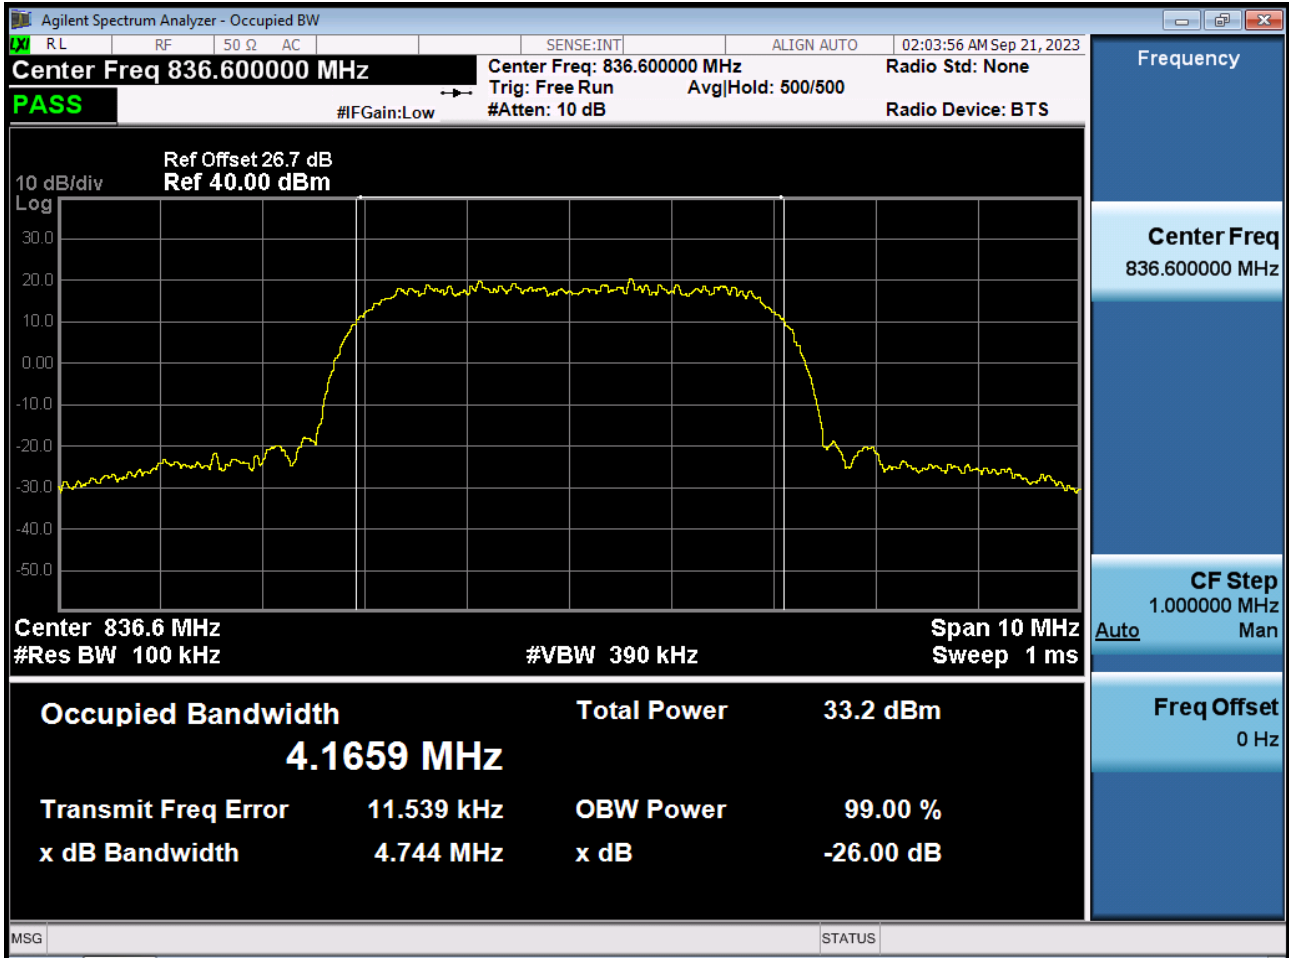

■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

