

# FCC LTE REPORT

## Certification

**Applicant Name:**

SAMSUNG Electronics Co., Ltd.

**Date of Issue:**

October 26, 2023

**Location:**

 HCT CO., LTD.,  
 74, Seoicheon-ro 578beon-gil, Majang-myeon,  
 Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

**Address:**

 129, Samsung-ro, Yeongtong-gu,  
 Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Report No.:** HCT-RF-2310-FC024-R1

**FCC ID:** A3LSMS926U

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

Model(s): SM-S926U  
 Additional Model(s): SM-S926U1  
 EUT Type: Mobile phone  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 FCC Rule Part(s): §22

**Main 1 Ant**

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band5/26 (1.4)	824.7 – 848.3	1M10G7D	QPSK	0.056	17.50
		1M10W7D	16QAM	0.048	16.77
		1M10W7D	64QAM	0.038	15.75
		1M11W7D	256QAM	0.018	12.63
LTE – Band5/26 (3)	825.5 – 847.5	2M71G7D	QPSK	0.056	17.52
		2M71W7D	16QAM	0.047	16.74
		2M71W7D	64QAM	0.037	15.72
		2M72W7D	256QAM	0.018	12.67
LTE – Band5/26 (5)	826.5 – 846.5	4M51G7D	QPSK	0.057	17.53
		4M51W7D	16QAM	0.047	16.70
		4M50W7D	64QAM	0.037	15.71
		4M50W7D	256QAM	0.018	12.64
LTE – Band5/26 (10)	829.0 – 844.0	8M99G7D	QPSK	0.057	17.57
		8M99W7D	16QAM	0.049	16.90
		8M98W7D	64QAM	0.038	15.76
		9M00W7D	256QAM	0.019	12.78
LTE – Band26 (15)	831.5 – 841.5	13M5G7D	QPSK	0.057	17.55
		13M5W7D	16QAM	0.049	16.93
		13M5W7D	64QAM	0.039	15.91
		13M5W7D	256QAM	0.020	12.92

**Sub 1 Ant**

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band5/26 (1.4)	824.7 – 848.3	1M10G7D	QPSK	0.089	19.49
		1M10W7D	16QAM	0.076	18.78
		1M10W7D	64QAM	0.061	17.82
		1M10W7D	256QAM	0.031	14.85
LTE – Band5/26 (3)	825.5 – 847.5	2M73G7D	QPSK	0.095	19.77
		2M72W7D	16QAM	0.079	18.97
		2M71W7D	64QAM	0.062	17.94
		2M72W7D	256QAM	0.031	14.88
LTE – Band5/26 (5)	826.5 – 846.5	4M52G7D	QPSK	0.099	19.96
		4M52W7D	16QAM	0.082	19.16
		4M52W7D	64QAM	0.064	18.08
		4M52W7D	256QAM	0.031	14.97
LTE – Band5/26 (10)	829.0 – 844.0	8M99G7D	QPSK	0.091	19.59
		9M01W7D	16QAM	0.075	18.75
		8M99W7D	64QAM	0.059	17.71
		8M99W7D	256QAM	0.029	14.69
LTE – Band26 (15)	831.5 – 841.5	13M5G7D	QPSK	0.091	19.57
		13M5W7D	16QAM	0.074	18.69
		13M5W7D	64QAM	0.059	17.69
		13M5W7D	256QAM	0.030	14.82

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.  
HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report No.: HCT-RF-2310-FC024-R1

---

REVIEWED BY



---

Report prepared by : Jae Mun Do  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.  
This test results were applied only to the test methods required by the standard.

Test Report Statement:

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2310-FC024	October 16, 2023	- First Approval Report
HCT-RF-2310-FC024-R1	October 26, 2023	- Revised the ERP result.(re-test)

## Table of Contents

REVIEWED BY .....	3
1. GENERAL INFORMATION .....	6
2. INTRODUCTION .....	7
2.1. DESCRIPTION OF EUT .....	7
2.2. MEASURING INSTRUMENT CALIBRATION .....	7
2.3. TEST FACILITY .....	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE .....	8
3.2 RADIATED POWER.....	9
3.3 RADIATED SPURIOUS EMISSIONS .....	10
3.4 PEAK- TO- AVERAGE RATIO.....	11
3.5 OCCUPIED BANDWIDTH. ....	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	13
3.7 BAND EDGE .....	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	15
3.9 WORST CASE(RADIATED TEST) .....	16
3.10 WORST CASE(CONDUCTED TEST) .....	18
4. LIST OF TEST EQUIPMENT .....	19
5. MEASUREMENT UNCERTAINTY .....	20
6. SUMMARY OF TEST RESULTS .....	21
7. SAMPLE CALCULATION .....	22
8. TEST DATA(Main 1 Ant).....	24
8.1 EFFECTIVE RADIATED POWER.....	24
8.2 RADIATED SPURIOUS EMISSIONS .....	27
8.3 PEAK-TO-AVERAGE RATIO.....	28
8.4 OCCUPIED BANDWIDTH .....	29
8.5 CONDUCTED SPURIOUS EMISSIONS .....	30
8.6 BAND EDGE .....	30
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	31
9. TEST DATA(Sub 1 Ant).....	36
9.1 EFFECTIVE RADIATED POWER.....	36
9.2 RADIATED SPURIOUS EMISSIONS .....	39
9.3 PEAK-TO-AVERAGE RATIO.....	40
9.4 OCCUPIED BANDWIDTH .....	41
9.5 CONDUCTED SPURIOUS EMISSIONS .....	42
9.6 BAND EDGE .....	42
9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	43
10. TEST PLOTS(Main 1 Ant) .....	48
11. TEST PLOTS(Sub 1 Ant).....	134
12. ANNEX A_ TEST SETUP PHOTO.....	220

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMS926U
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§22, §2
<b>EUT Type:</b>	Mobile phone
<b>Model(s):</b>	SM-S926U
<b>Additional Model(s):</b>	SM-S926U1
<b>Tx Frequency:</b>	824.7 MHz – 848.3 MHz (LTE – Band 5 / 26 (1.4 MHz)) 825.5 MHz – 847.5 MHz (LTE – Band 5 / 26 (3 MHz)) 826.5 MHz – 846.5 MHz (LTE – Band 5 / 26 (5 MHz)) 829.0 MHz – 844.0 MHz (LTE – Band 5 / 26 (10 MHz)) 831.5 MHz – 841.5 MHz (LTE – Band 26 (15 MHz))
<b>Date(s) of Tests:</b>	September 05, 2023 ~ October 26, 2023
<b>Serial number:</b>	Radiated: R3CW90B4EEV Conducted: 741c314dee0f7ece

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6, mmWave.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), WIFI 6E, Bluetooth, BT LE, NFC, UWB, WPT.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Conducted Output Power	- N/A (See SAR Report)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12



### 3.2 RADIATED POWER

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

#### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $> 2 \times$  span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

#### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1MHz for emissions above 1 GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15 \text{ dB}$$

### 3.4 PEAK- TO- AVERAGE RATIO

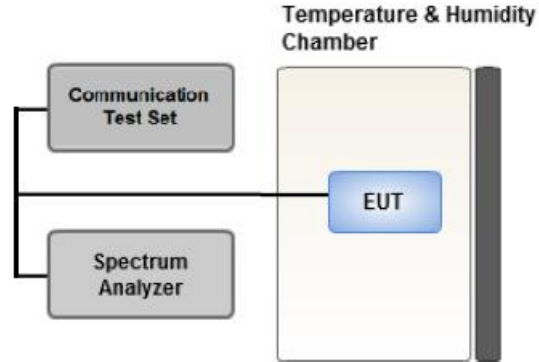

**Test setup**

#### ① CCDF Procedure for PAPR

##### **Test Settings**

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - .- for continuous transmissions, set to 1 ms,
  - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

### 3.5 OCCUPIED BANDWIDTH.



**Test setup**

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### **Test Settings**

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL



**Test setup**

#### **Test Overview**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

### 3.7 BAND EDGE

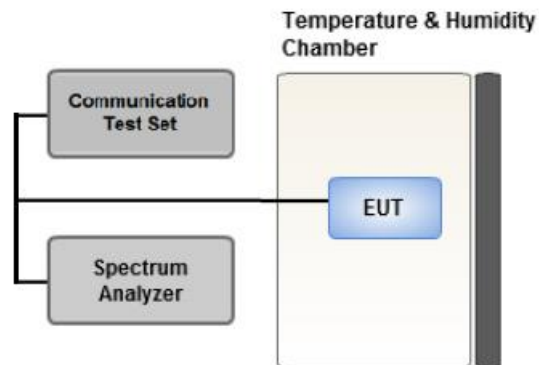

**Test setup**

#### **Test Overview**

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

#### **Test Notes**

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by  $10 \log(1 \text{ MHz/ RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

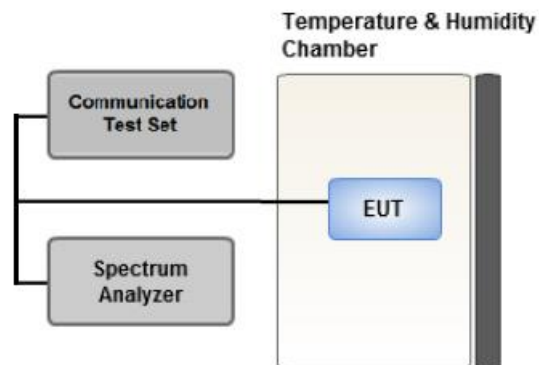

#### Test setup

#### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter.

Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at

least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**3.9 WORST CASE(RADIATED TEST)**

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.  
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)  
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location.  
 Mode : Stand alone, Simultaneous transmission scenarios  
 Worst case : Stand alone
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 10 MHz(Main 1 Ant), 5 MHz(Sub 1 Ant))
- LTE Band 26(1.4 M/3 M/5 M/10 M) overlaps the entire frequency range of LTE Band 5(1.4 M/3 M/5 M/10 M) and they have the same Tune-up power.  
 Therefore, test data provided in this report covers Band 5 as well as Band 26.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data
- Please refer to the table below.
- SM-S926U & additional models were tested and the worst case results are reported.  
 (Worst case : SM-S926U)

[ Main 1 Ant Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Y



[ Sub 1 Ant Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Y

**3.10 WORST CASE(CONDUCTED TEST)**

- All modes of operation were investigated and the worst case configuration results are reported.
- SM-S926U & additional models were tested and the worst case results are reported.  
(Worst case : SM-S926U)

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
<b>Occupied Bandwidth</b>	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15	Mid	Full RB	0
<b>Peak-To-Average Ratio</b>	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15	Mid	Full RB	0
<b>Band Edge</b>	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		1.4, 3, 5, 10, 15	Low, High	Full RB	0
<b>Spurious and Harmonic Emissions at Antenna Terminal</b>	QPSK	1.4, 3, 5, 10, 15	Low, Mid, High	1	0

#### 4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	FBSR-02B(1.2G HPF+LNA)	T&M SYSTEM	F1L1	01/19/2024	Annual
RF Switching System	FBSR-02B(3.3G HPF+LNA)	T&M SYSTEM	F1L2	01/19/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/19/2024	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/23/2024	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/11/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/20/2024	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/19/2024	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/17/2024	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/10/2024	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	03/21/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	12/01/2023	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/05/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	06/22/2024	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/24/2024	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.16 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.57 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§22.913(d)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, §22.355	< 2.5 ppm	PASS

Note:

1. See SAR Report

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

### 8. TEST DATA(Main 1 Ant)

#### 8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
824.7	LTE 5/26 (1.4 MHz)	QPSK	-31.97	28.93	-10.05	1.38	H	< 7.00	0.056	17.50
		16-QAM	-32.70	28.20	-10.05	1.38	H		0.048	16.77
		64-QAM	-33.72	27.18	-10.05	1.38	H		0.038	15.75
		256-QAM	-36.84	24.06	-10.05	1.38	H		0.018	12.63
836.5		QPSK	-32.55	28.74	-10.05	1.40	H		0.054	17.29
		16-QAM	-33.36	27.93	-10.05	1.40	H		0.045	16.48
		64-QAM	-34.37	26.92	-10.05	1.40	H		0.035	15.47
		256-QAM	-37.46	23.83	-10.05	1.40	H		0.017	12.38
848.3		QPSK	-33.21	28.41	-10.05	1.41	H		0.050	16.95
		16-QAM	-33.95	27.67	-10.05	1.41	H		0.042	16.21
		64-QAM	-34.99	26.63	-10.05	1.41	H		0.033	15.17
		256-QAM	-38.05	23.57	-10.05	1.41	H		0.016	12.11

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
825.5	LTE 5/26 (3 MHz)	QPSK	-31.95	28.96	-10.05	1.39	H	< 7.00	0.056	17.52
		16-QAM	-32.73	28.18	-10.05	1.39	H		0.047	16.74
		64-QAM	-33.75	27.16	-10.05	1.39	H		0.037	15.72
		256-QAM	-36.80	24.11	-10.05	1.39	H		0.018	12.67
836.5		QPSK	-32.45	28.84	-10.05	1.40	H		0.055	17.39
		16-QAM	-33.30	27.99	-10.05	1.40	H		0.045	16.54
		64-QAM	-34.33	26.96	-10.05	1.40	H		0.036	15.51
		256-QAM	-37.41	23.88	-10.05	1.40	H		0.018	12.43
847.5		QPSK	-33.17	28.46	-10.05	1.41	H		0.050	17.00
		16-QAM	-33.98	27.65	-10.05	1.41	H		0.042	16.19
		64-QAM	-34.98	26.65	-10.05	1.41	H		0.033	15.19
		256-QAM	-38.05	23.58	-10.05	1.41	H		0.016	12.12



Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
826.5	LTE 5/26 (5 MHz)	QPSK	-31.93	28.97	-10.05	1.39	H	< 7.00	0.057	17.53
		16-QAM	-32.76	28.14	-10.05	1.39	H		0.047	16.70
		64-QAM	-33.75	27.15	-10.05	1.39	H		0.037	15.71
		256-QAM	-36.82	24.08	-10.05	1.39	H		0.018	12.64
836.5		QPSK	-32.35	28.94	-10.05	1.40	H		0.056	17.49
		16-QAM	-33.18	28.11	-10.05	1.40	H		0.046	16.66
		64-QAM	-34.25	27.04	-10.05	1.40	H		0.036	15.59
		256-QAM	-37.32	23.97	-10.05	1.40	H		0.018	12.52
846.5		QPSK	-33.19	28.49	-10.05	1.41	H		0.051	17.03
		16-QAM	-33.95	27.73	-10.05	1.41	H		0.042	16.27
		64-QAM	-35.04	26.64	-10.05	1.41	H		0.033	15.18
		256-QAM	-38.12	23.56	-10.05	1.41	H		0.016	12.10

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
829.0	LTE 5/26 (10 MHz)	QPSK	-32.01	29.01	-10.05	1.39	H	< 7.00	0.057	17.57
		16-QAM	-32.68	28.34	-10.05	1.39	H		0.049	16.90
		64-QAM	-33.82	27.20	-10.05	1.39	H		0.038	15.76
		256-QAM	-36.80	24.22	-10.05	1.39	H		0.019	12.78
836.5		QPSK	-32.32	28.97	-10.05	1.40	H		0.057	17.52
		16-QAM	-33.11	28.18	-10.05	1.40	H		0.047	16.73
		64-QAM	-34.17	27.12	-10.05	1.40	H		0.037	15.67
		256-QAM	-37.26	24.03	-10.05	1.40	H		0.018	12.58
844.0		QPSK	-33.12	28.36	-10.05	1.41	H		0.049	16.90
		16-QAM	-33.95	27.53	-10.05	1.41	H		0.041	16.07
		64-QAM	-34.98	26.50	-10.05	1.41	H		0.032	15.04
		256-QAM	-38.08	23.40	-10.05	1.41	H		0.016	11.94

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit		ERP	
								W		W	dBm
831.5	LTE 26 (15 MHz)	QPSK	-32.14	28.99	-10.05	1.39	H	< 7.00	0.057	17.55	
		16-QAM	-32.76	28.37	-10.05	1.39	H		0.049	16.93	
		64-QAM	-33.78	27.35	-10.05	1.39	H		0.039	15.91	
		256-QAM	-36.77	24.36	-10.05	1.39	H		0.020	12.92	
836.5		QPSK	-32.45	28.84	-10.05	1.40	H		0.055	17.39	
		16-QAM	-33.19	28.10	-10.05	1.40	H		0.046	16.65	
		64-QAM	-34.15	27.14	-10.05	1.40	H		0.037	15.69	
		256-QAM	-37.04	24.25	-10.05	1.40	H		0.019	12.80	
841.5		QPSK	-33.17	28.25	-10.05	1.41	H		0.048	16.79	
		16-QAM	-33.84	27.58	-10.05	1.41	H		0.041	16.12	
		64-QAM	-34.86	26.56	-10.05	1.41	H		0.032	15.10	
		256-QAM	-37.89	23.53	-10.05	1.41	H		0.016	12.07	

**8.2 RADIATED SPURIOUS EMISSIONS**

- ▣ MODE: LTE 26(5)
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
26840 (829.0)	1 658.00	-53.21	9.63	-63.96	2.15	H	-56.48	-13.00
	2 487.00	-56.27	10.42	-60.41	2.58	V	-52.57	-13.00
	3 316.00	-58.33	12.23	-59.31	3.06	H	-50.14	-13.00
26915 (836.5)	1 673.00	-53.10	9.69	-63.88	2.14	V	-56.33	-13.00
	2 509.50	-54.94	10.59	-59.15	2.57	V	-51.13	-13.00
	3 346.00	-59.16	12.38	-60.43	3.11	H	-51.17	-13.00
26990 (844.0)	1 688.00	-53.11	9.82	-63.37	2.18	V	-55.73	-13.00
	2 532.00	-56.75	10.67	-60.28	2.63	H	-52.24	-13.00
	3 376.00	-59.09	12.52	-60.19	3.08	H	-50.75	-13.00

**8.3 PEAK-TO-AVERAGE RATIO**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
5/26	1.4 MHz	836.5	QPSK	6	0	5.48
			16-QAM			6.34
			64-QAM			6.61
			256-QAM			6.90
	3 MHz		QPSK	15		4.54
			16-QAM			5.49
			64-QAM			6.42
			256-QAM			6.79
	5 MHz		QPSK	25		4.58
			16-QAM			5.62
			64-QAM			6.42
			256-QAM			6.80
	10 MHz		QPSK	50		4.62
			16-QAM			5.66
			64-QAM			6.45
			256-QAM			6.73
26	15 MHz	QPSK	75	4.75		
		16-QAM		5.82		
		64-QAM		6.64		
		256-QAM		6.75		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 69 ~ 88.

**8.4 OCCUPIED BANDWIDTH**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
5/26	1.4 MHz	836.5	QPSK	6	0	1.0980
			16-QAM			1.1002
			64-QAM			1.0993
			256-QAM			1.1053
	3 MHz		QPSK	15		2.7138
			16-QAM			2.7115
			64-QAM			2.7111
			256-QAM			2.7201
	5 MHz		QPSK	25		4.5088
			16-QAM			4.5090
			64-QAM			4.5017
			256-QAM			4.5024
	10 MHz		QPSK	50		8.9869
			16-QAM			8.9938
			64-QAM			8.9764
			256-QAM			9.0027
26	15 MHz	QPSK	75	13.484		
		16-QAM		13.496		
		64-QAM		13.480		
		256-QAM		13.501		

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 49 ~ 68.

**8.5 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
5/26	1.4	824.7	3.7010	27.976	-66.989	-39.013	-13.00
		836.5	3.7234	27.976	-67.127	-39.151	
		848.3	3.6935	27.976	-67.240	-39.264	
	3	825.5	3.7139	27.976	-67.223	-39.247	
		836.5	3.7034	27.976	-67.258	-39.282	
		847.5	3.6885	27.976	-67.068	-39.092	
	5	826.5	3.6985	27.976	-66.786	-38.810	
		836.5	3.6945	27.976	-66.637	-38.661	
		846.5	3.6710	27.976	-66.963	-38.987	
	10	829.0	3.7134	27.976	-67.013	-39.037	
		836.5	3.6890	27.976	-67.105	-39.129	
		844.0	3.7064	27.976	-67.039	-39.063	
26	15	831.5	3.6905	27.976	-66.977	-39.001	
		836.5	3.6915	27.976	-67.062	-39.086	
		841.5	3.7064	27.976	-67.051	-39.075	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 119 ~ 133.
2. Conducted Spurious Emissions was tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Ext. Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


**8.6 BAND EDGE**

- Plots of the EUT's Band Edge are shown Page 89 ~ 118.

**8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**


- ▣ MODE: LTE 5/26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 499 997	0.0	0.000 000	0.000
100 %		-30	836 499 999	2.3	0.000 000	0.003
100 %		-20	836 499 995	-2.3	0.000 000	-0.003
100 %		-10	836 500 000	2.6	0.000 000	0.003
100 %		0	836 499 995	-2.3	0.000 000	-0.003
100 %		+10	836 500 003	5.8	0.000 001	0.007
100 %		+30	836 499 999	2.1	0.000 000	0.003
100 %		+40	836 499 991	-6.2	-0.000 001	-0.007
100 %		+50	836 500 000	3.5	0.000 000	0.004
Batt. Endpoint		3.300	+20	836 500 001	3.8	0.000 000

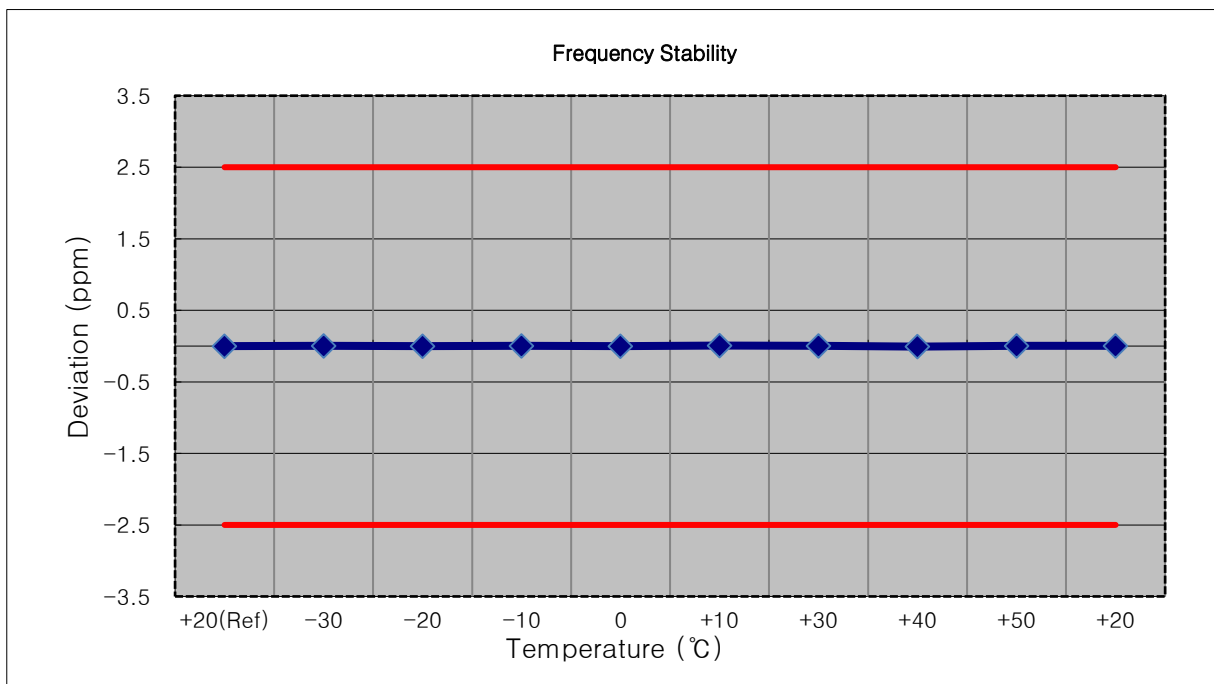

- ▣ MODE: LTE 5/26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 500 007	0.0	0.000 000	0.000
100 %		-30	836 500 012	4.6	0.000 001	0.005
100 %		-20	836 500 013	6.0	0.000 001	0.007
100 %		-10	836 500 013	5.7	0.000 001	0.007
100 %		0	836 500 012	4.5	0.000 001	0.005
100 %		+10	836 500 013	5.6	0.000 001	0.007
100 %		+30	836 500 013	5.4	0.000 001	0.006
100 %		+40	836 500 015	7.5	0.000 001	0.009
100 %		+50	836 500 016	8.4	0.000 001	0.010
Batt. Endpoint		3.300	+20	836 500 011	3.8	0.000 000

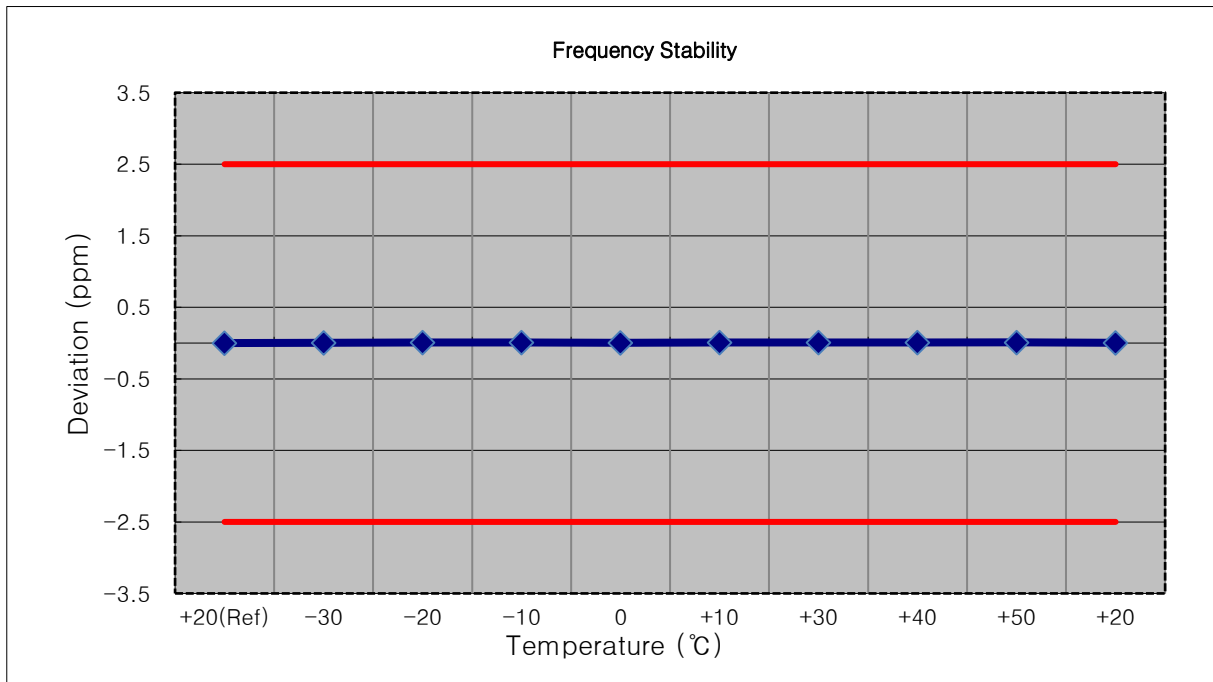




- ▣ MODE: LTE 5/26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 500 007	0.0	0.000 000	0.000
100 %		-30	836 500 016	8.7	0.000 001	0.010
100 %		-20	836 500 013	5.5	0.000 001	0.007
100 %		-10	836 500 011	3.7	0.000 000	0.004
100 %		0	836 500 014	6.5	0.000 001	0.008
100 %		+10	836 500 016	8.7	0.000 001	0.010
100 %		+30	836 500 014	7.2	0.000 001	0.009
100 %		+40	836 500 011	4.4	0.000 001	0.005
100 %		+50	836 500 013	6.4	0.000 001	0.008
Batt. Endpoint		3.300	+20	836 500 013	5.7	0.000 001

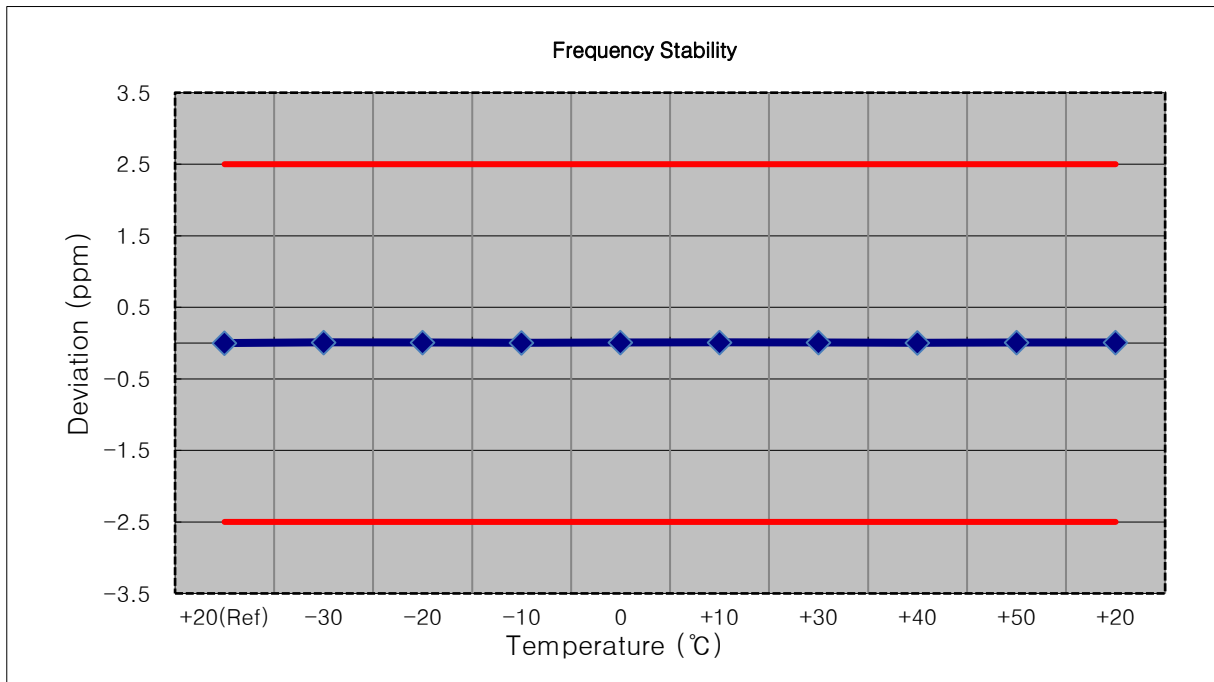


- ▣ MODE: LTE 5/26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 500 006	0.0	0.000 000	0.000
100 %		-30	836 500 012	6.1	0.000 001	0.007
100 %		-20	836 500 013	6.7	0.000 001	0.008
100 %		-10	836 500 011	4.8	0.000 001	0.006
100 %		0	836 500 011	5.4	0.000 001	0.006
100 %		+10	836 500 010	4.1	0.000 000	0.005
100 %		+30	836 500 010	4.5	0.000 001	0.005
100 %		+40	836 500 010	4.3	0.000 001	0.005
100 %		+50	836 500 011	5.5	0.000 001	0.007
Batt. Endpoint	3.300	+20	836 500 012	6.1	0.000 001	0.007

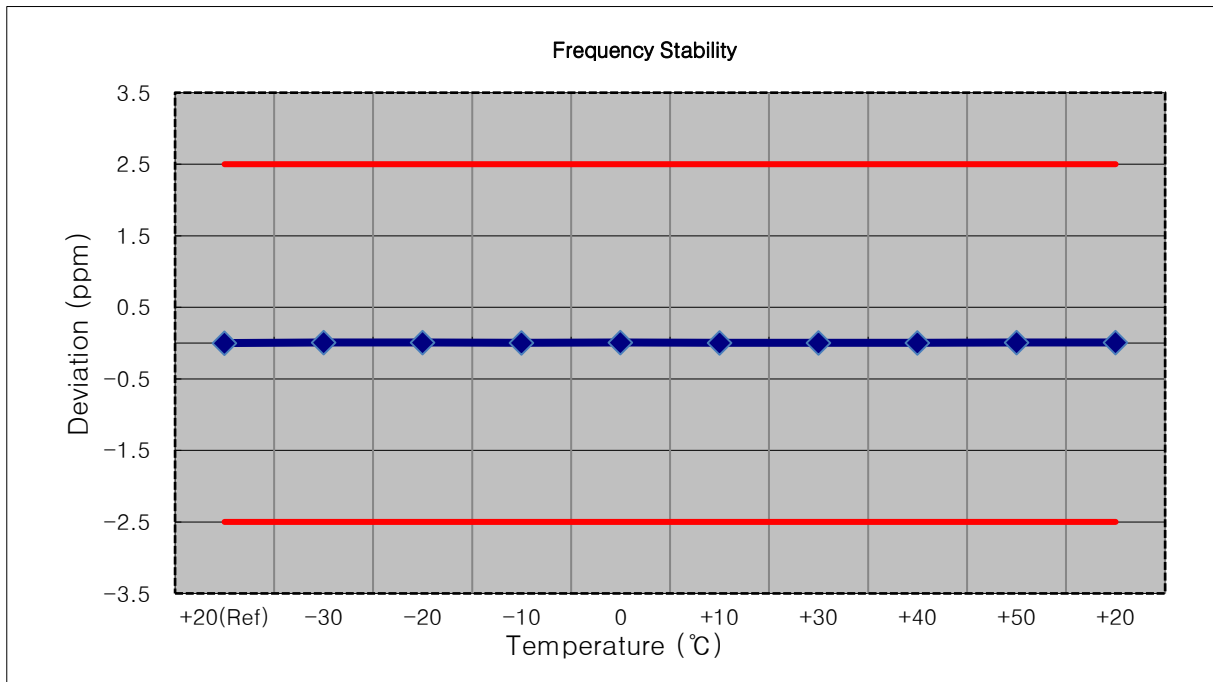

- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 500 007	0.0	0.000 000	0.000
100 %		-30	836 500 013	6.7	0.000 001	0.008
100 %		-20	836 500 011	5.3	0.000 001	0.006
100 %		-10	836 500 008	2.0	0.000 000	0.002
100 %		0	836 500 012	6.3	0.000 001	0.008
100 %		+10	836 500 013	7.0	0.000 001	0.008
100 %		+30	836 500 009	3.3	0.000 000	0.004
100 %		+40	836 500 011	5.0	0.000 001	0.006
100 %		+50	836 500 011	5.0	0.000 001	0.006
Batt. Endpoint		3.300	+20	836 500 009	3.4	0.000 000

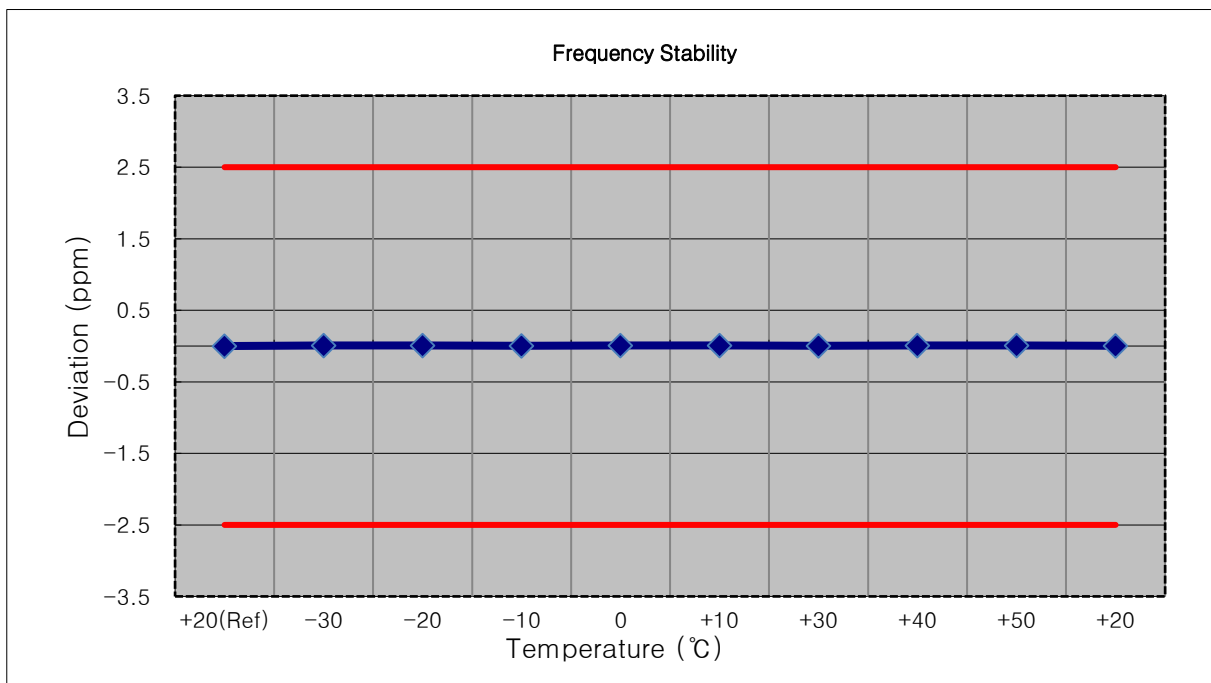

### 9. TEST DATA(Sub 1 Ant)

#### 9.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
824.7	LTE 5/26 (1.4 MHz)	QPSK	-30.44	30.46	-10.05	1.38	H	< 7.00	0.080	19.03
		16-QAM	-31.21	29.69	-10.05	1.38	H		0.067	18.26
		64-QAM	-32.25	28.65	-10.05	1.38	H		0.053	17.22
		256-QAM	-35.34	25.56	-10.05	1.38	H		0.026	14.13
836.5		QPSK	-30.46	30.83	-10.05	1.40	H		0.087	19.38
		16-QAM	-31.22	30.07	-10.05	1.40	H		0.073	18.62
		64-QAM	-32.17	29.12	-10.05	1.40	H		0.059	17.67
		256-QAM	-35.05	26.24	-10.05	1.40	H		0.030	14.79
848.3		QPSK	-30.67	30.95	-10.05	1.41	H		0.089	19.49
		16-QAM	-31.38	30.24	-10.05	1.41	H		0.076	18.78
		64-QAM	-32.34	29.28	-10.05	1.41	H		0.061	17.82
		256-QAM	-35.31	26.31	-10.05	1.41	H		0.031	14.85

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
825.5	LTE 5/26 (3 MHz)	QPSK	-30.45	30.46	-10.05	1.39	H	< 7.00	0.080	19.02
		16-QAM	-31.26	29.65	-10.05	1.39	H		0.066	18.21
		64-QAM	-32.32	28.59	-10.05	1.39	H		0.052	17.15
		256-QAM	-35.33	25.58	-10.05	1.39	H		0.026	14.14
836.5		QPSK	-30.17	31.12	-10.05	1.40	H		0.093	19.67
		16-QAM	-31.05	30.24	-10.05	1.40	H		0.076	18.79
		64-QAM	-32.06	29.23	-10.05	1.40	H		0.060	17.78
		256-QAM	-35.10	26.19	-10.05	1.40	H		0.030	14.74
847.5		QPSK	-30.40	31.23	-10.05	1.41	H		0.095	19.77
		16-QAM	-31.20	30.43	-10.05	1.41	H		0.079	18.97
		64-QAM	-32.23	29.40	-10.05	1.41	H		0.062	17.94
		256-QAM	-35.29	26.34	-10.05	1.41	H		0.031	14.88

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit		ERP	
								W		W	dBm
826.5	LTE 5/26 (5 MHz)	QPSK	-30.38	30.52	-10.05	1.39	H	< 7.00		0.081	19.08
		16-QAM	-31.19	29.71	-10.05	1.39	H			0.067	18.27
		64-QAM	-32.24	28.66	-10.05	1.39	H			0.053	17.22
		256-QAM	-35.25	25.65	-10.05	1.39	H			0.026	14.21
836.5		QPSK	-30.08	31.21	-10.05	1.40	H			0.095	19.76
		16-QAM	-30.88	30.41	-10.05	1.40	H			0.079	18.96
		64-QAM	-31.90	29.39	-10.05	1.40	H			0.062	17.94
		256-QAM	-34.97	26.32	-10.05	1.40	H			0.031	14.87
846.5		QPSK	-30.26	31.42	-10.05	1.41	H			0.099	19.96
		16-QAM	-31.06	30.62	-10.05	1.41	H			0.082	19.16
		64-QAM	-32.14	29.54	-10.05	1.41	H			0.064	18.08
		256-QAM	-35.25	26.43	-10.05	1.41	H			0.031	14.97

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit		ERP	
								W		W	dBm
829.0	LTE 5/26 (10 MHz)	QPSK	-30.29	30.73	-10.05	1.39	H	< 7.00		0.085	19.29
		16-QAM	-31.04	29.98	-10.05	1.39	H			0.072	18.54
		64-QAM	-32.11	28.91	-10.05	1.39	H			0.056	17.47
		256-QAM	-35.16	25.86	-10.05	1.39	H			0.028	14.42
836.5		QPSK	-30.38	30.91	-10.05	1.40	H			0.088	19.46
		16-QAM	-31.13	30.16	-10.05	1.40	H			0.074	18.71
		64-QAM	-32.13	29.16	-10.05	1.40	H			0.059	17.71
		256-QAM	-35.15	26.14	-10.05	1.40	H			0.029	14.69
844.0		QPSK	-30.43	31.05	-10.05	1.41	H			0.091	19.59
		16-QAM	-31.27	30.21	-10.05	1.41	H			0.075	18.75
		64-QAM	-32.32	29.16	-10.05	1.41	H			0.059	17.70
		256-QAM	-35.36	26.12	-10.05	1.41	H			0.029	14.66

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit		ERP	
								W		W	dBm
831.5	LTE 26 (15 MHz)	QPSK	-30.12	31.01	-10.05	1.39	H	< 7.00		0.091	19.57
		16-QAM	-31.00	30.13	-10.05	1.39	H			0.074	18.69
		64-QAM	-32.00	29.13	-10.05	1.39	H			0.059	17.69
		256-QAM	-35.08	26.05	-10.05	1.39	H			0.029	14.61
836.5		QPSK	-30.56	30.73	-10.05	1.40	H			0.085	19.28
		16-QAM	-31.31	29.98	-10.05	1.40	H			0.071	18.53
		64-QAM	-32.21	29.08	-10.05	1.40	H			0.058	17.63
		256-QAM	-35.02	26.27	-10.05	1.40	H			0.030	14.82
841.5		QPSK	-30.46	30.96	-10.05	1.41	H			0.089	19.50
		16-QAM	-31.29	30.13	-10.05	1.41	H			0.074	18.67
		64-QAM	-32.30	29.12	-10.05	1.41	H			0.058	17.66
		256-QAM	-35.40	26.02	-10.05	1.41	H			0.029	14.56

**9.2 RADIATED SPURIOUS EMISSIONS**

- ▣ MODE: LTE 26(5)
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
26815 (826.5)	1 653.00	-52.84	9.58	-63.39	2.14	H	-55.95	-13.00
	2 479.50	-56.61	10.34	-61.09	2.62	V	-53.37	-13.00
	3 306.00	-56.40	12.19	-57.59	3.02	H	-48.43	-13.00
26915 (836.5)	1 673.00	-52.56	9.69	-63.34	2.14	V	-55.79	-13.00
	2 509.50	-55.13	10.59	-59.34	2.57	H	-51.32	-13.00
	3 346.00	-58.19	12.38	-59.46	3.11	V	-50.20	-13.00
27015 (846.5)	1 693.00	-52.99	9.82	-63.25	2.18	V	-55.61	-13.00
	2 539.50	-56.20	10.67	-59.63	2.63	H	-51.59	-13.00
	3 386.00	-58.73	3.05	-40.90	12.53	H	-50.38	-13.00

**9.3 PEAK-TO-AVERAGE RATIO**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
5/26	1.4 MHz	836.5	QPSK	6	0	5.41
			16-QAM			6.25
			64-QAM			6.56
			256-QAM			6.89
	3 MHz		QPSK	15		4.54
			16-QAM			5.49
			64-QAM			6.42
			256-QAM			6.83
	5 MHz		QPSK	25		4.57
			16-QAM			5.61
			64-QAM			6.45
			256-QAM			6.82
	10 MHz		QPSK	50		4.61
			16-QAM			5.68
			64-QAM			6.39
			256-QAM			6.76
26	15 MHz	QPSK	75	4.75		
		16-QAM		5.80		
		64-QAM		6.64		
		256-QAM		6.78		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 155 ~ 174.



**9.4 OCCUPIED BANDWIDTH**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
5/26	1.4 MHz	836.5	QPSK	6	0	1.0963
			16-QAM			1.0986
			64-QAM			1.1024
			256-QAM			1.1023
	3 MHz		QPSK	15		2.7343
			16-QAM			2.7148
			64-QAM			2.7082
			256-QAM			2.7220
	5 MHz		QPSK	25		4.5222
			16-QAM			4.5209
			64-QAM			4.5236
			256-QAM			4.5180
	10 MHz		QPSK	50		8.9906
			16-QAM			9.0120
			64-QAM			8.9934
			256-QAM			8.9926
26	15 MHz	QPSK	75	13.531		
		16-QAM		13.522		
		64-QAM		13.476		
		256-QAM		13.481		

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 135 ~ 154.

**9.5 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
5/26	1.4	824.7	3.7119	27.976	-67.370	-39.394	-13.00
		836.5	3.6641	27.976	-66.948	-38.972	
		848.3	2.6531	27.976	-67.498	-39.522	
	3	825.5	3.1755	27.976	-67.117	-39.141	
		836.5	3.1745	27.976	-67.118	-39.142	
		847.5	3.6820	27.976	-67.209	-39.233	
	5	826.5	3.1745	27.976	-67.427	-39.451	
		836.5	3.6691	27.976	-67.251	-39.275	
		846.5	3.1765	27.976	-67.136	-39.160	
	10	829.0	3.6995	27.976	-67.168	-39.192	
		836.5	3.1596	27.976	-67.251	-39.275	
		844.0	3.7194	27.976	-67.281	-39.305	
26	15	831.5	3.2005	27.976	-67.253	-39.277	
		836.5	3.7054	27.976	-67.276	-39.300	
		841.5	3.1651	27.976	-67.341	-39.365	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 205 ~ 219.
2. Conducted Spurious Emissions was tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Ext. Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


**9.6 BAND EDGE**

- Plots of the EUT's Band Edge are shown Page 175 ~ 204.

**9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**


- ▣ MODE: LTE 5/26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 500 003	0.0	0.000 000	0.000
100 %		-30	836 500 000	-3.1	0.000 000	-0.004
100 %		-20	836 500 000	-2.4	0.000 000	-0.003
100 %		-10	836 500 001	-2.2	0.000 000	-0.003
100 %		0	836 500 005	2.4	0.000 000	0.003
100 %		+10	836 500 008	4.8	0.000 001	0.006
100 %		+30	836 499 999	-3.6	0.000 000	-0.004
100 %		+40	836 500 004	1.6	0.000 000	0.002
100 %		+50	836 500 005	2.0	0.000 000	0.002
Batt. Endpoint		3.300	+20	836 500 005	2.2	0.000 000

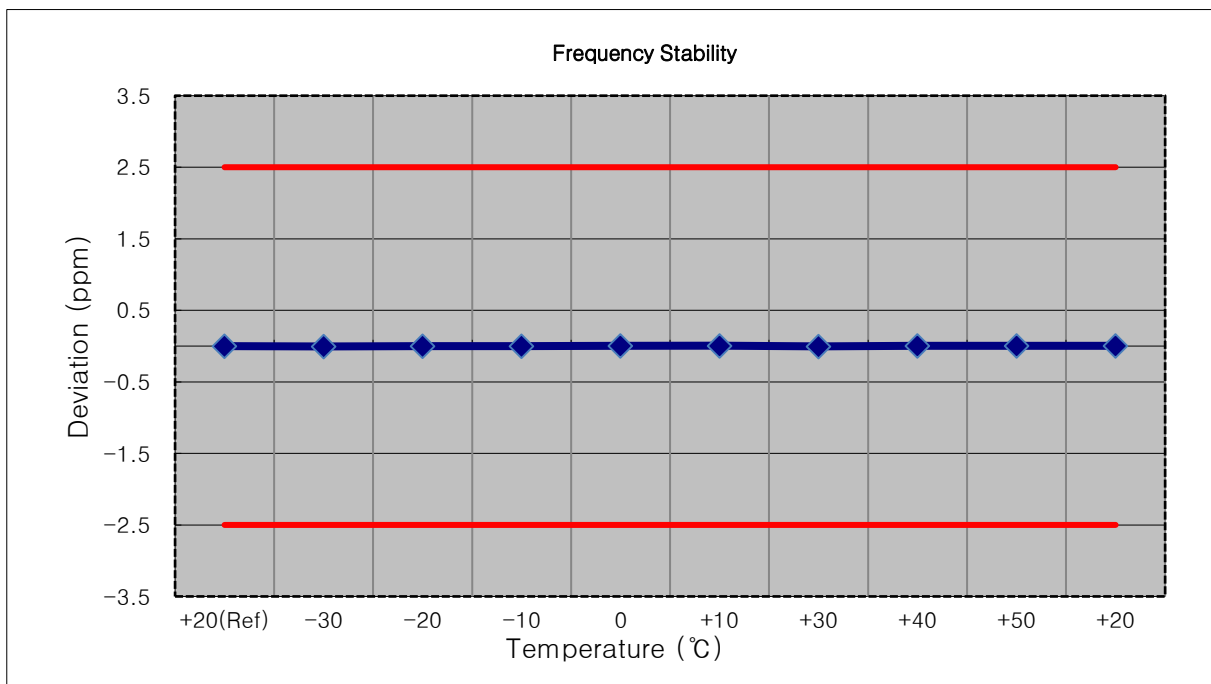


- ▣ MODE: LTE 5/26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 500 007	0.0	0.000 000	0.000
100 %		-30	836 500 014	6.5	0.000 001	0.008
100 %		-20	836 500 013	6.0	0.000 001	0.007
100 %		-10	836 500 014	6.6	0.000 001	0.008
100 %		0	836 500 013	5.5	0.000 001	0.007
100 %		+10	836 500 014	6.8	0.000 001	0.008
100 %		+30	836 500 013	6.3	0.000 001	0.008
100 %		+40	836 500 014	6.8	0.000 001	0.008
100 %		+50	836 500 011	3.8	0.000 000	0.005
Batt. Endpoint		3.300	+20	836 500 013	6.2	0.000 001

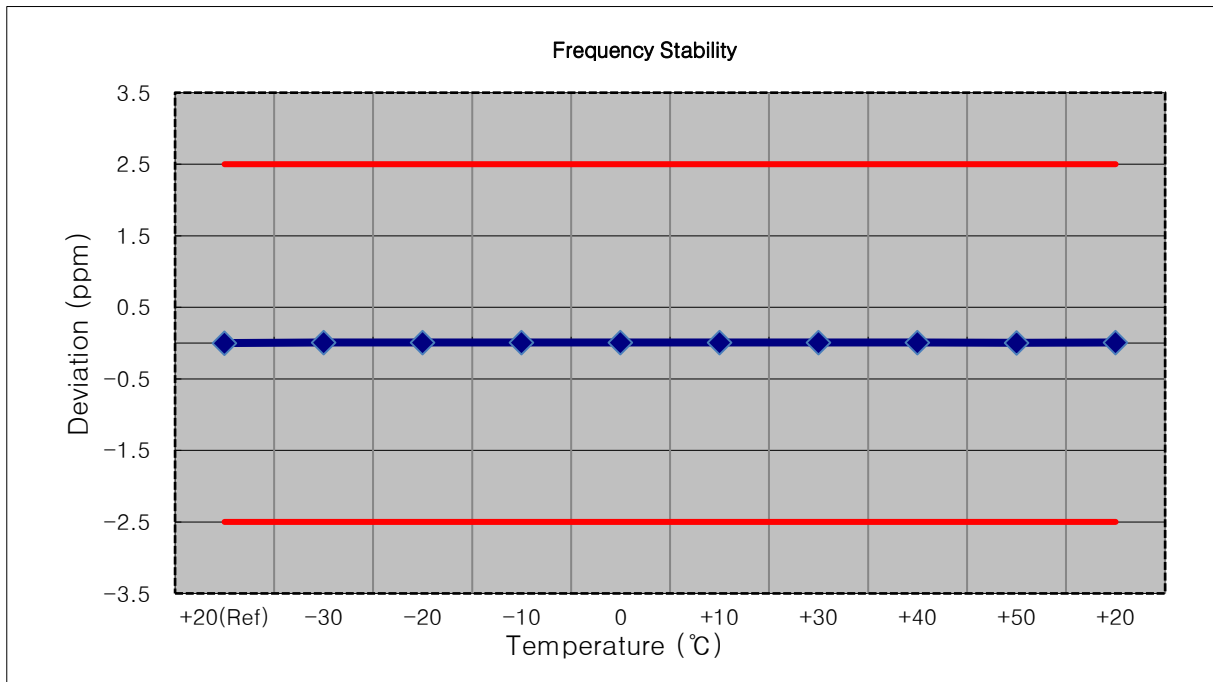


- ▣ MODE: LTE 5/26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 500 007	0.0	0.000 000	0.000
100 %		-30	836 500 013	6.1	0.000 001	0.007
100 %		-20	836 500 014	7.6	0.000 001	0.009
100 %		-10	836 500 011	4.8	0.000 001	0.006
100 %		0	836 500 013	6.8	0.000 001	0.008
100 %		+10	836 500 013	6.4	0.000 001	0.008
100 %		+30	836 500 014	7.3	0.000 001	0.009
100 %		+40	836 500 011	4.9	0.000 001	0.006
100 %		+50	836 500 013	6.5	0.000 001	0.008
Batt. Endpoint		3.300	+20	836 500 014	7.4	0.000 001

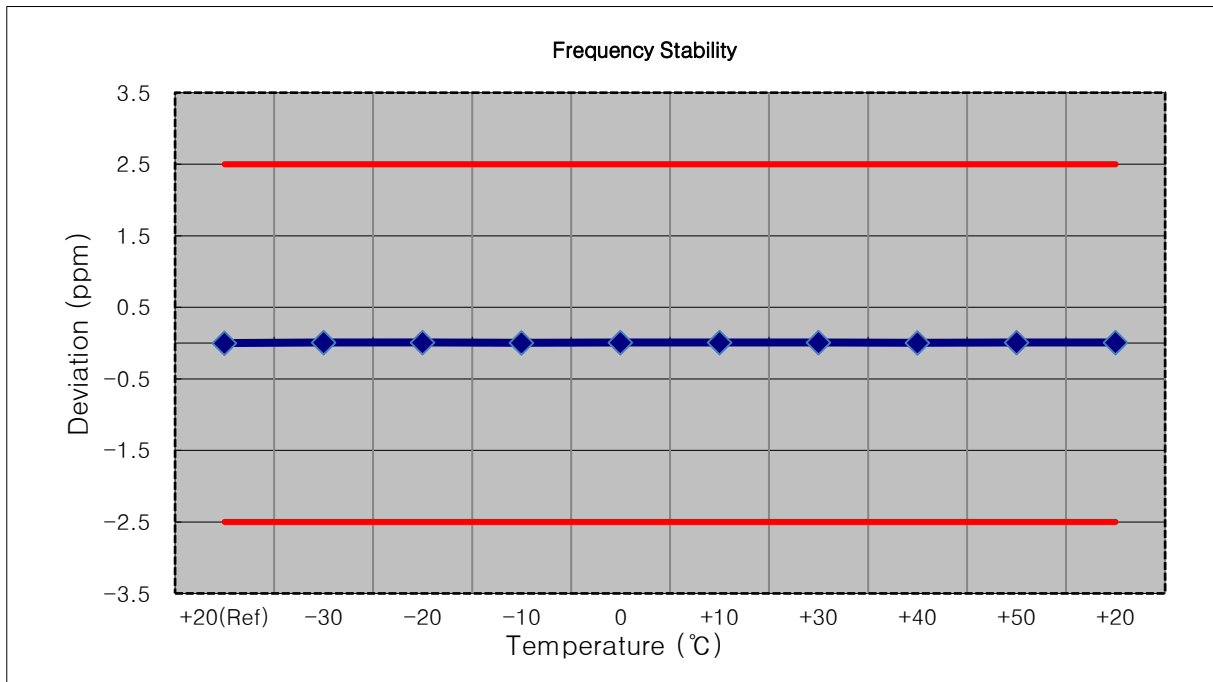


- ▣ MODE: LTE 5/26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 500 005	0.0	0.000 000	0.000
100 %		-30	836 500 011	5.6	0.000 001	0.007
100 %		-20	836 500 009	3.7	0.000 000	0.004
100 %		-10	836 500 012	7.2	0.000 001	0.009
100 %		0	836 500 010	5.0	0.000 001	0.006
100 %		+10	836 500 010	4.6	0.000 001	0.005
100 %		+30	836 500 015	10.0	0.000 001	0.012
100 %		+40	836 500 014	8.5	0.000 001	0.010
100 %		+50	836 500 013	7.6	0.000 001	0.009
Batt. Endpoint	3.300	+20	836 500 011	6.4	0.000 001	0.008

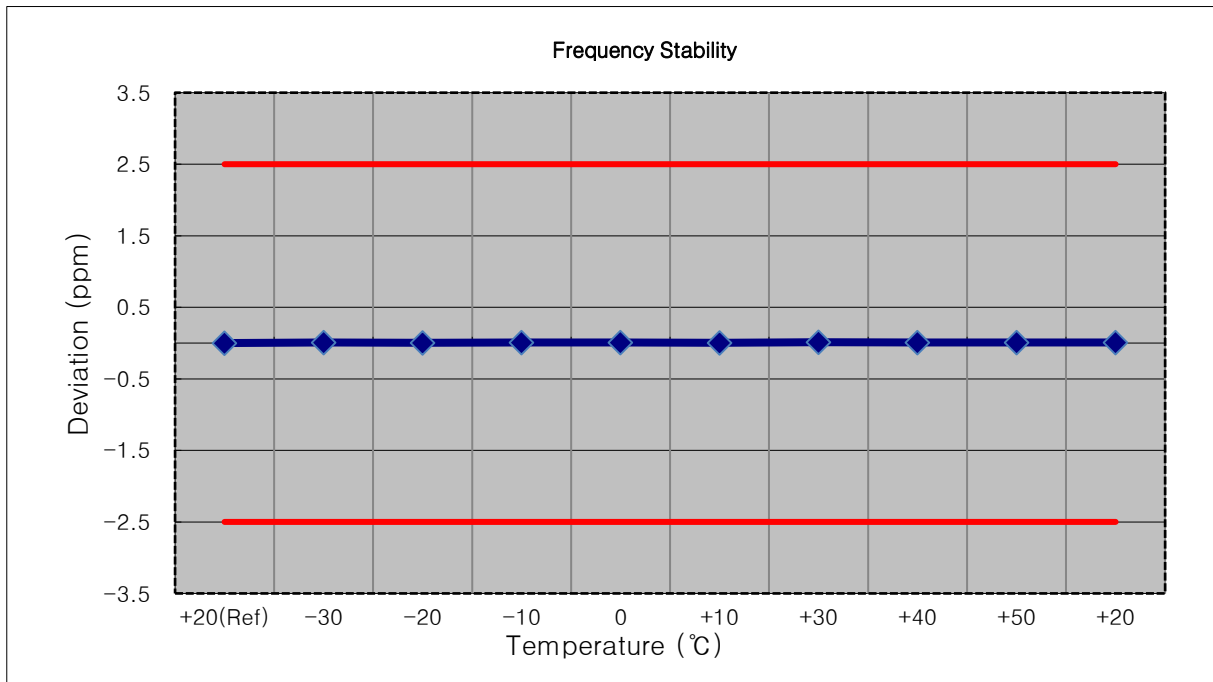

- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 26915 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	836 500 003	0.0	0.000 000	0.000
100 %		-30	836 500 011	5.6	0.000 001	0.007
100 %		-20	836 500 008	3.3	0.000 000	0.004
100 %		-10	836 500 012	6.8	0.000 001	0.008
100 %		0	836 500 009	3.9	0.000 000	0.005
100 %		+10	836 500 011	6.0	0.000 001	0.007
100 %		+30	836 500 010	5.3	0.000 001	0.006
100 %		+40	836 500 008	3.4	0.000 000	0.004
100 %		+50	836 500 009	4.4	0.000 001	0.005
Batt. Endpoint		3.300	+20	836 500 012	7.0	0.000 001

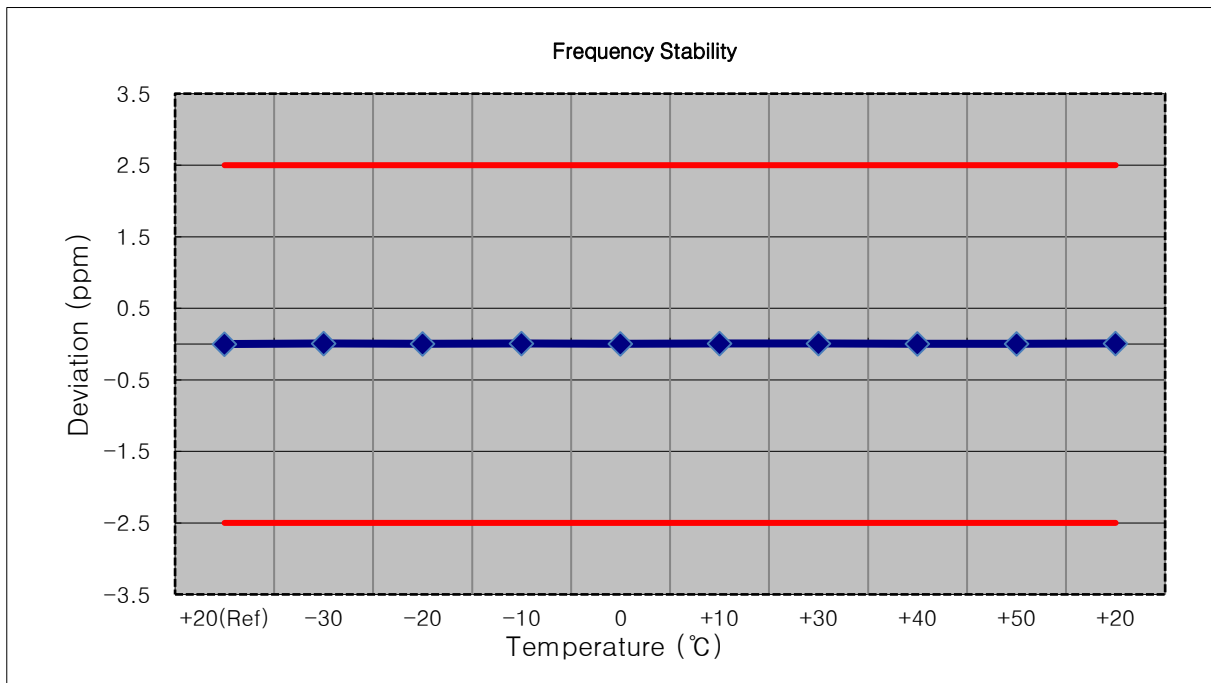


## 10. TEST PLOTS(Main 1 Ant)




BAND5/26. Occupied Bandwidth Plot (1.4 M BW Ch.26915 QPSK\_RB6\_0)

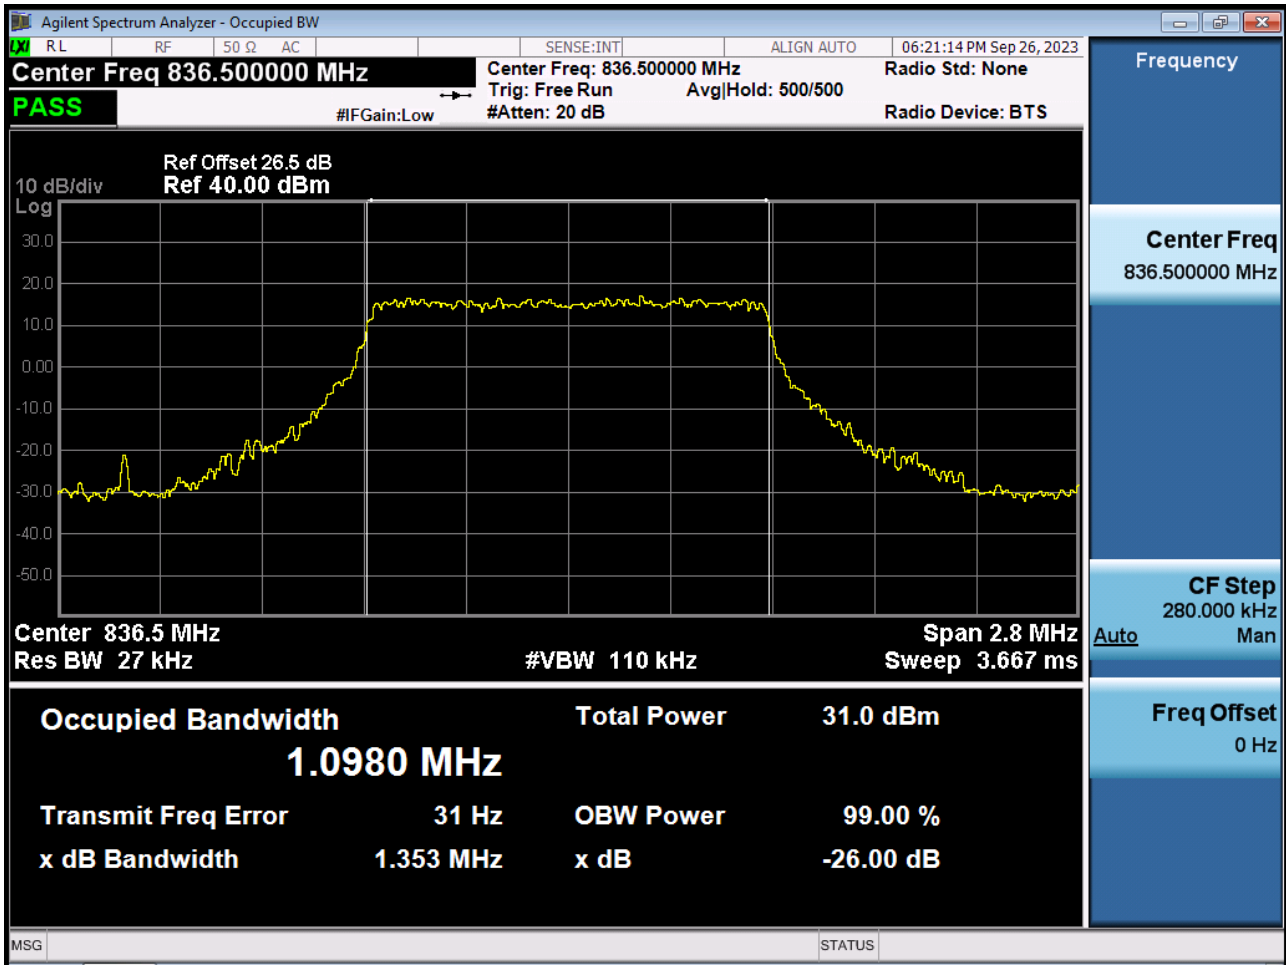


BAND5/26. Occupied Bandwidth Plot (1.4 M BW Ch.26915 16QAM\_RB6\_0)

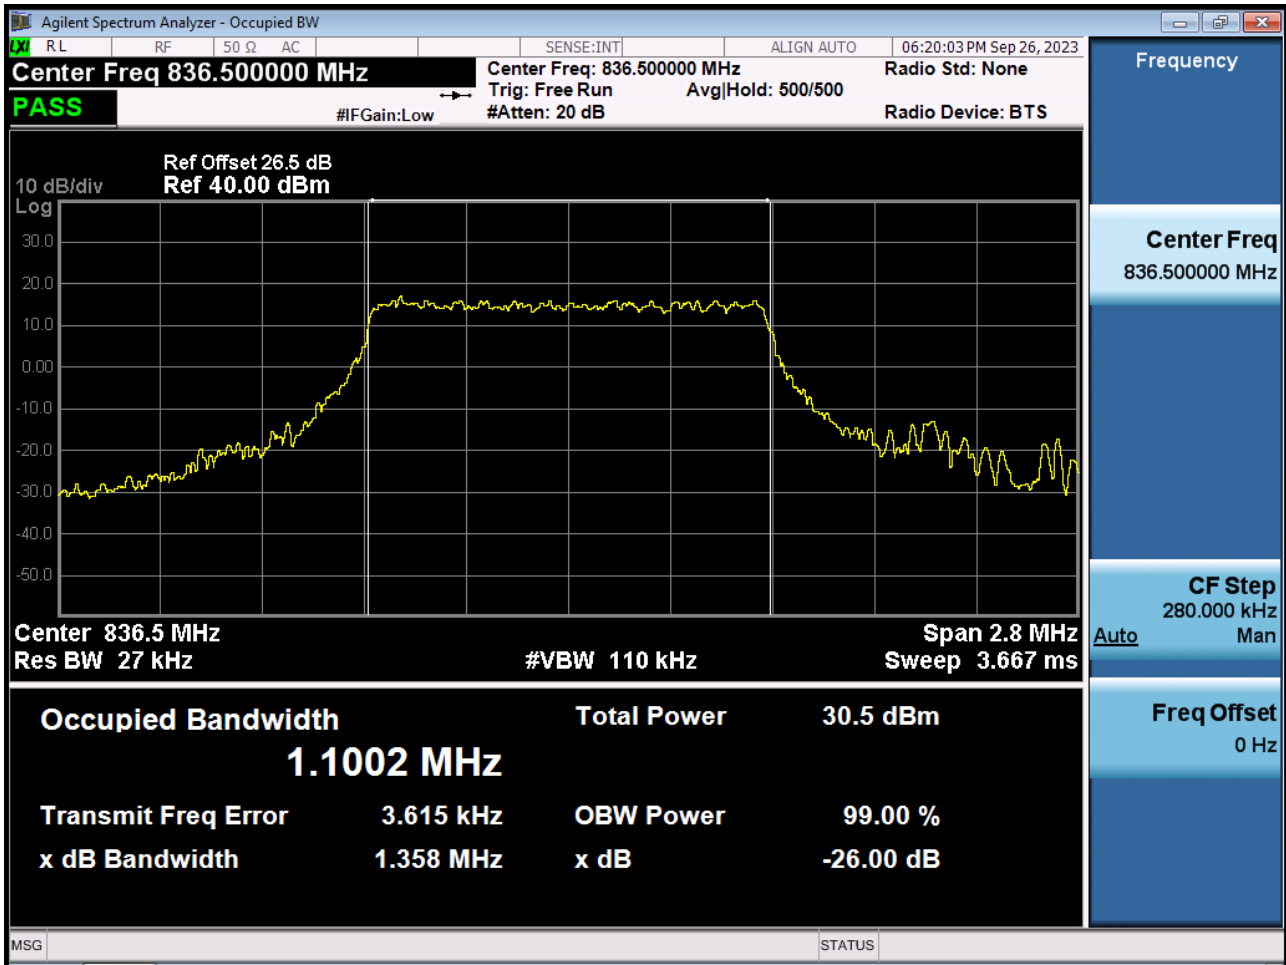


BAND5/26. Occupied Bandwidth Plot (1.4 M BW Ch.26915 64QAM\_RB6\_0)

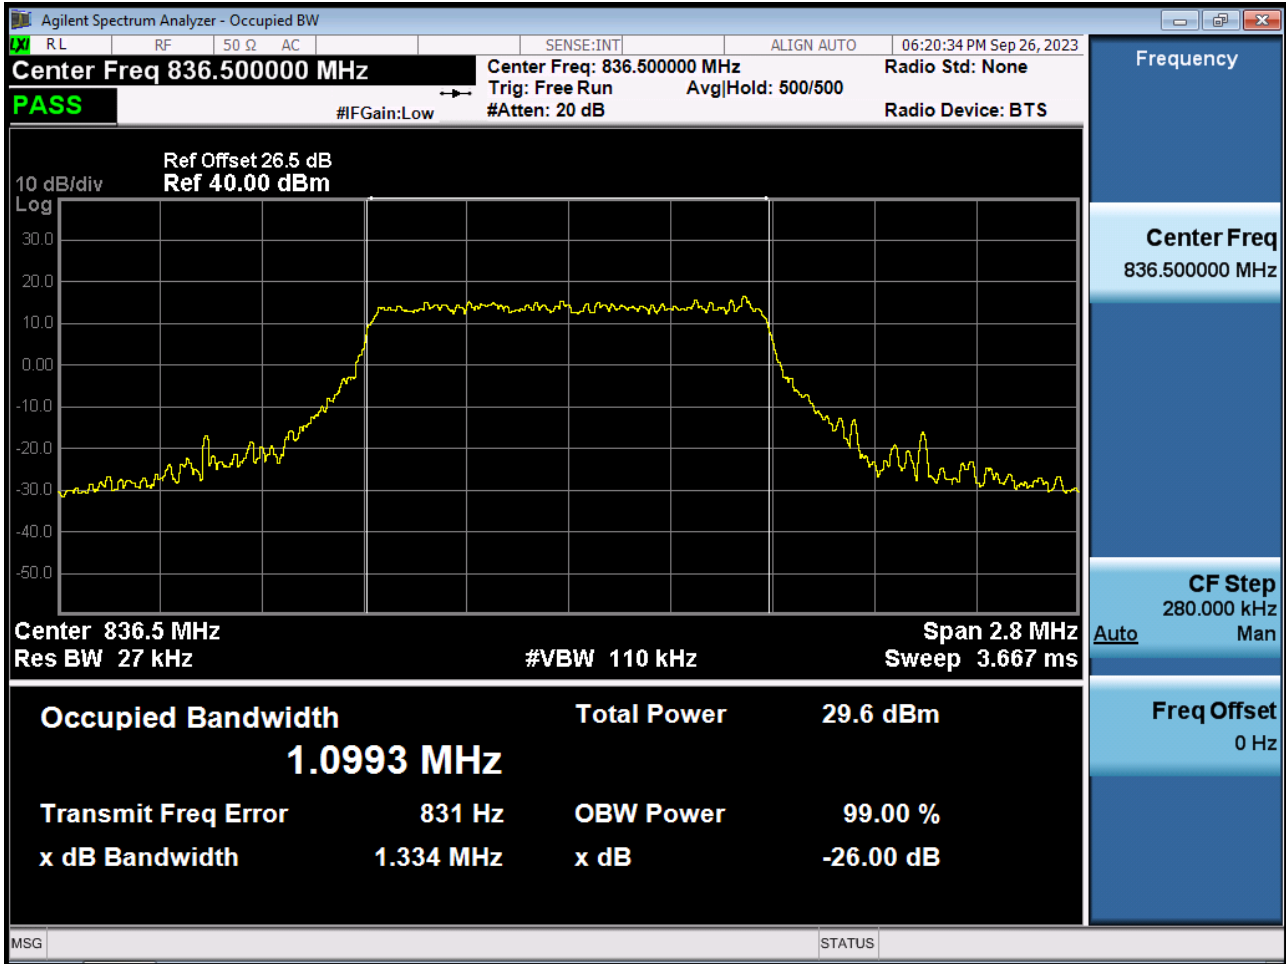


BAND5/26. Occupied Bandwidth Plot (1.4 M BW Ch.26915 256QAM\_RB6\_0)

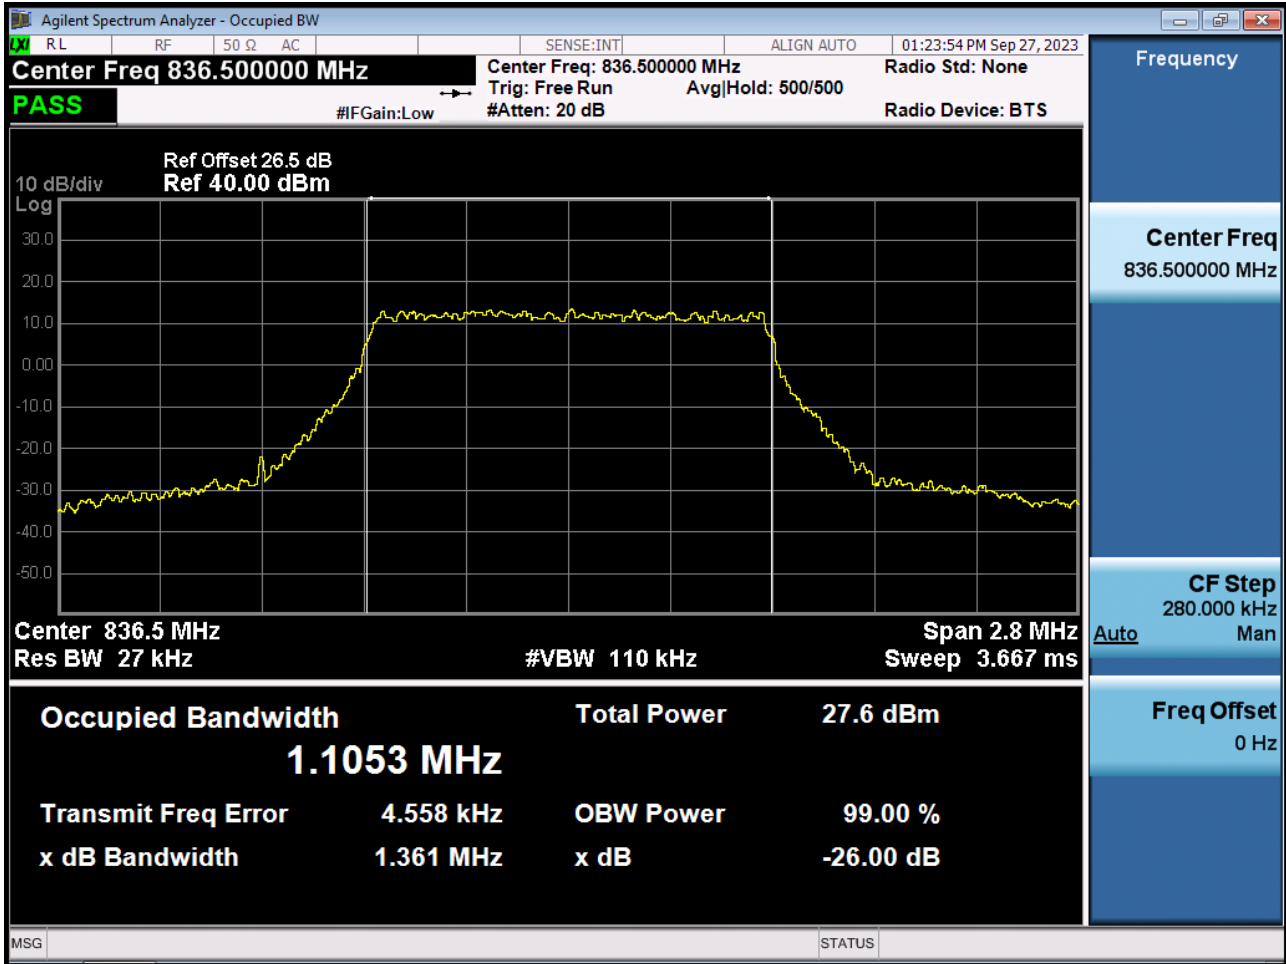


BAND5/26. Occupied Bandwidth Plot (3 M BW Ch.26915 QPSK\_RB15\_0)

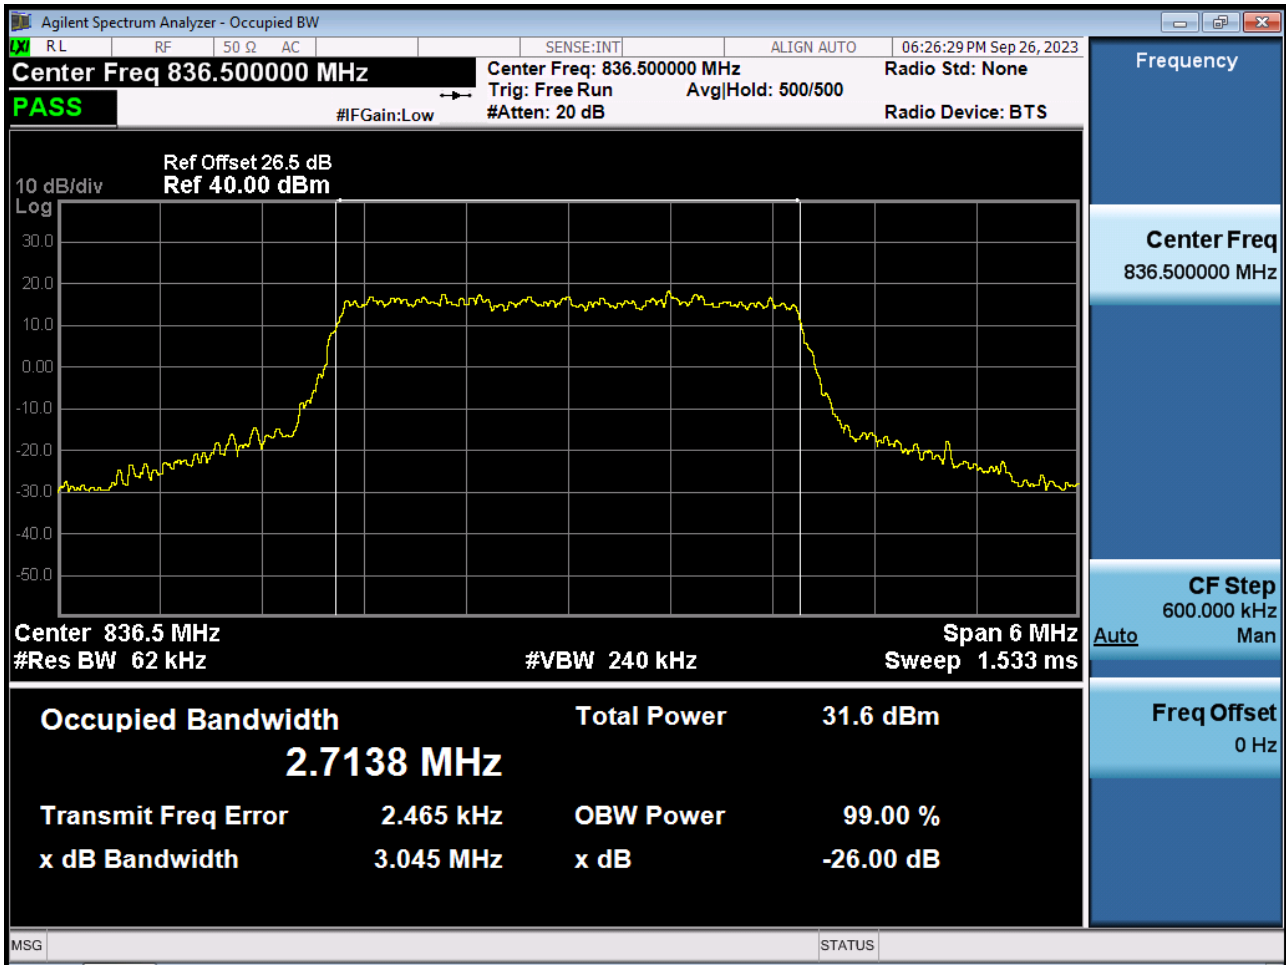


BAND5/26. Occupied Bandwidth Plot (3 M BW Ch.26915 16QAM\_RB15\_0)

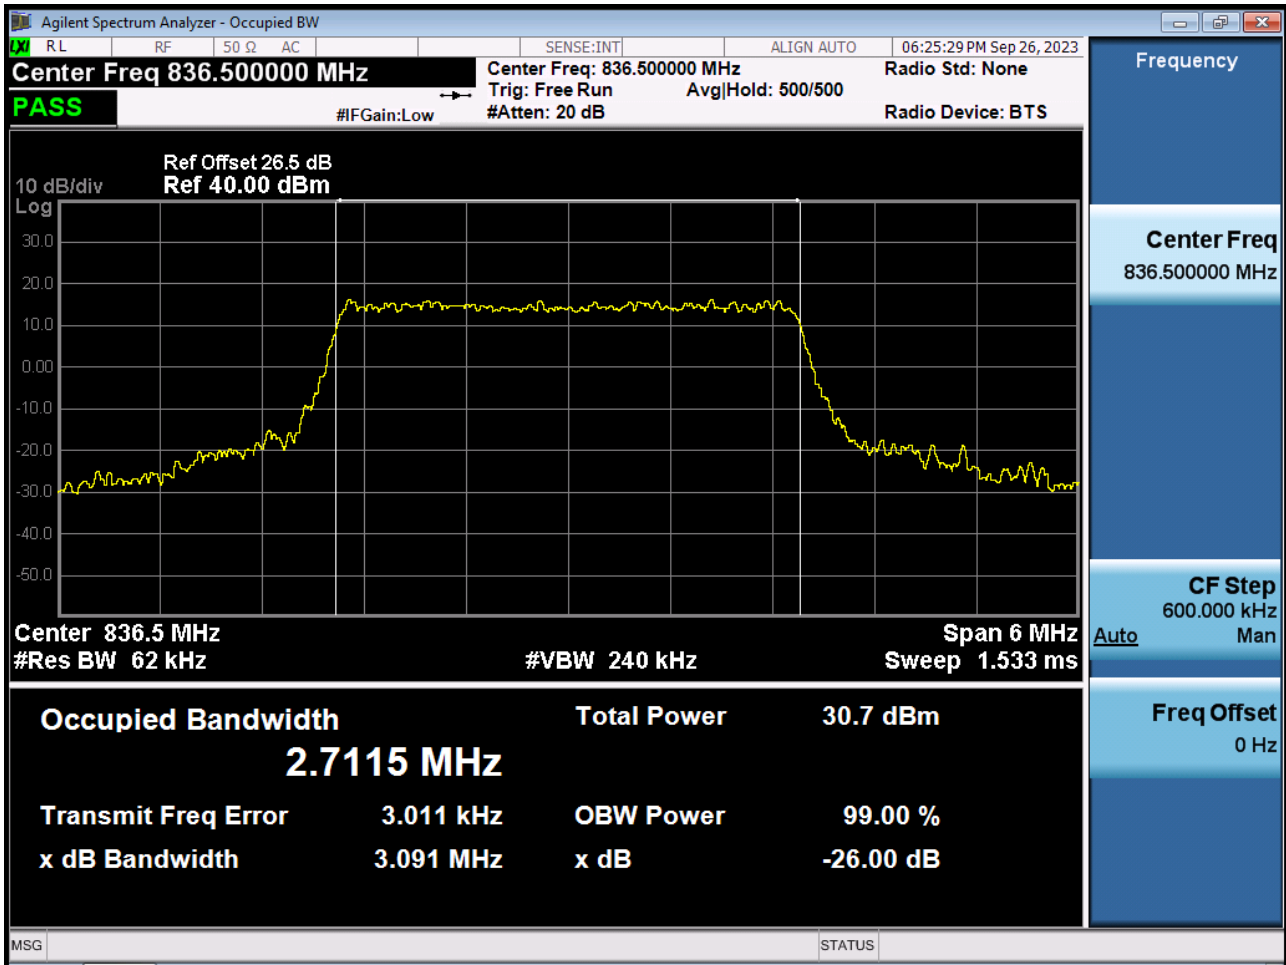

BAND5/26. Occupied Bandwidth Plot (3 M BW Ch.26915 64QAM\_RB15\_0)

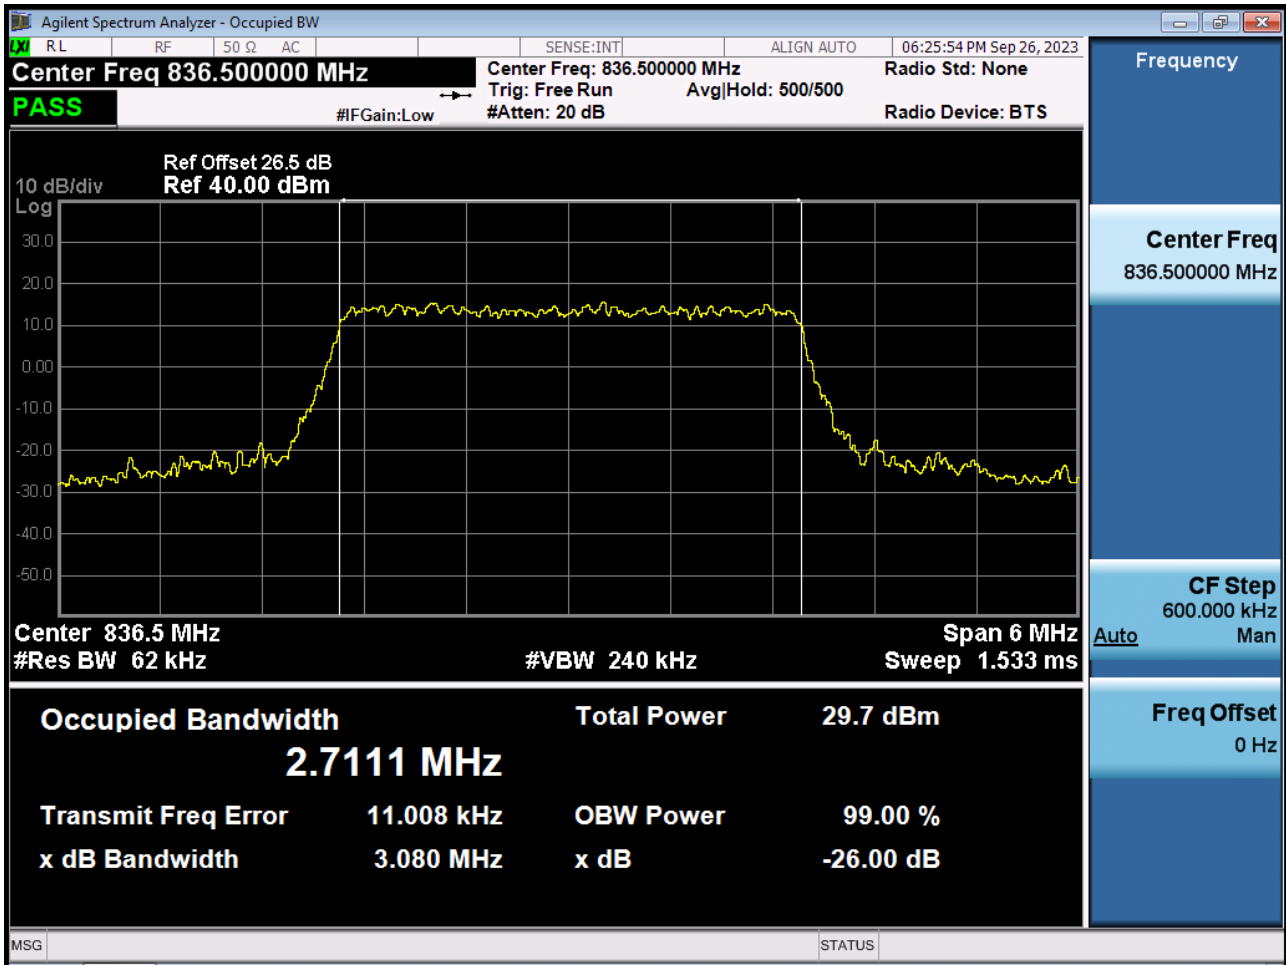


BAND5/26. Occupied Bandwidth Plot (3 M BW Ch.26915 256QAM\_RB15\_0)

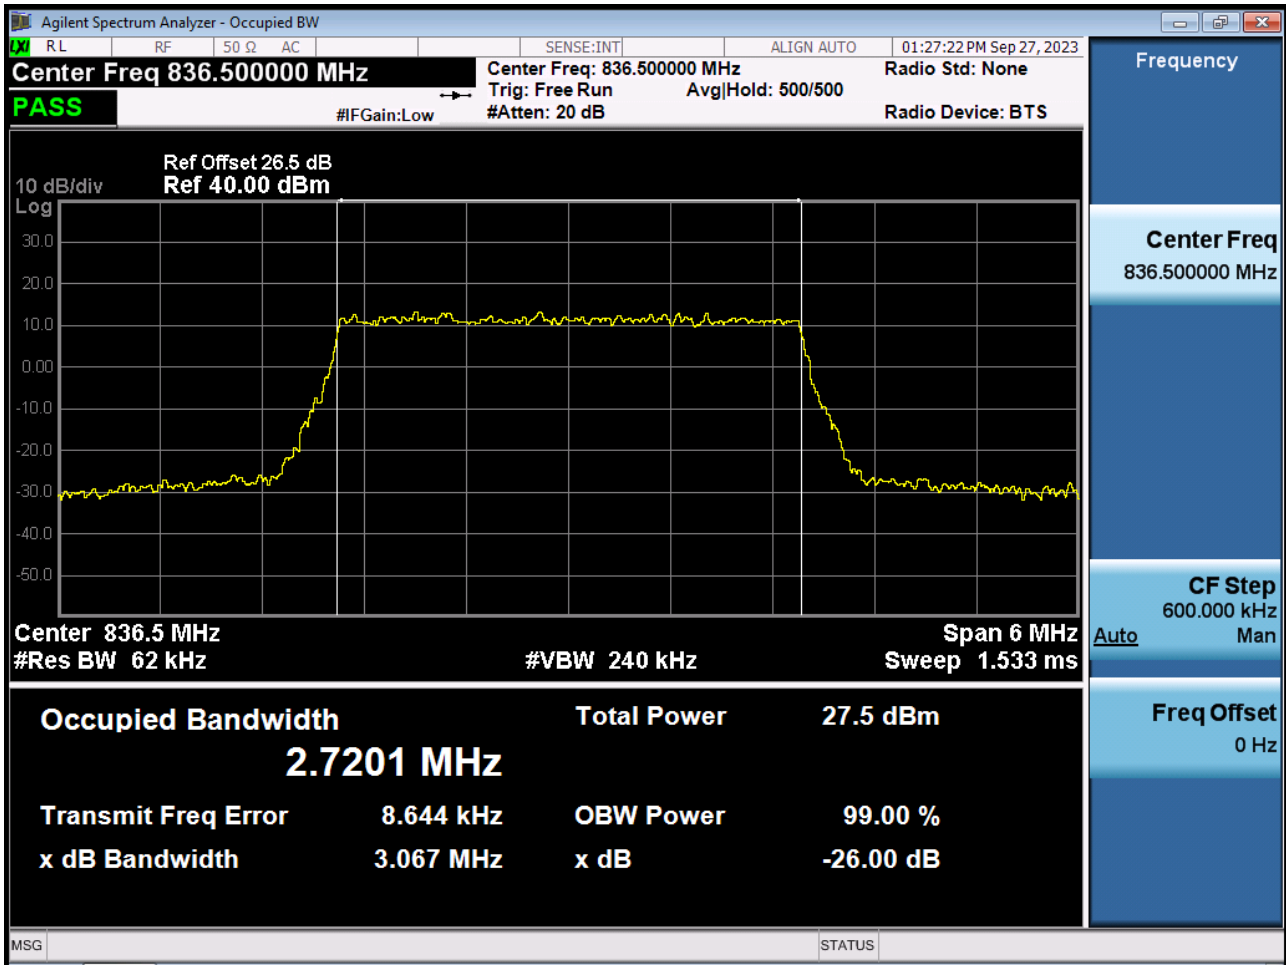





BAND5/26. Occupied Bandwidth Plot (5 M BW Ch.26915 QPSK\_RB25\_0)

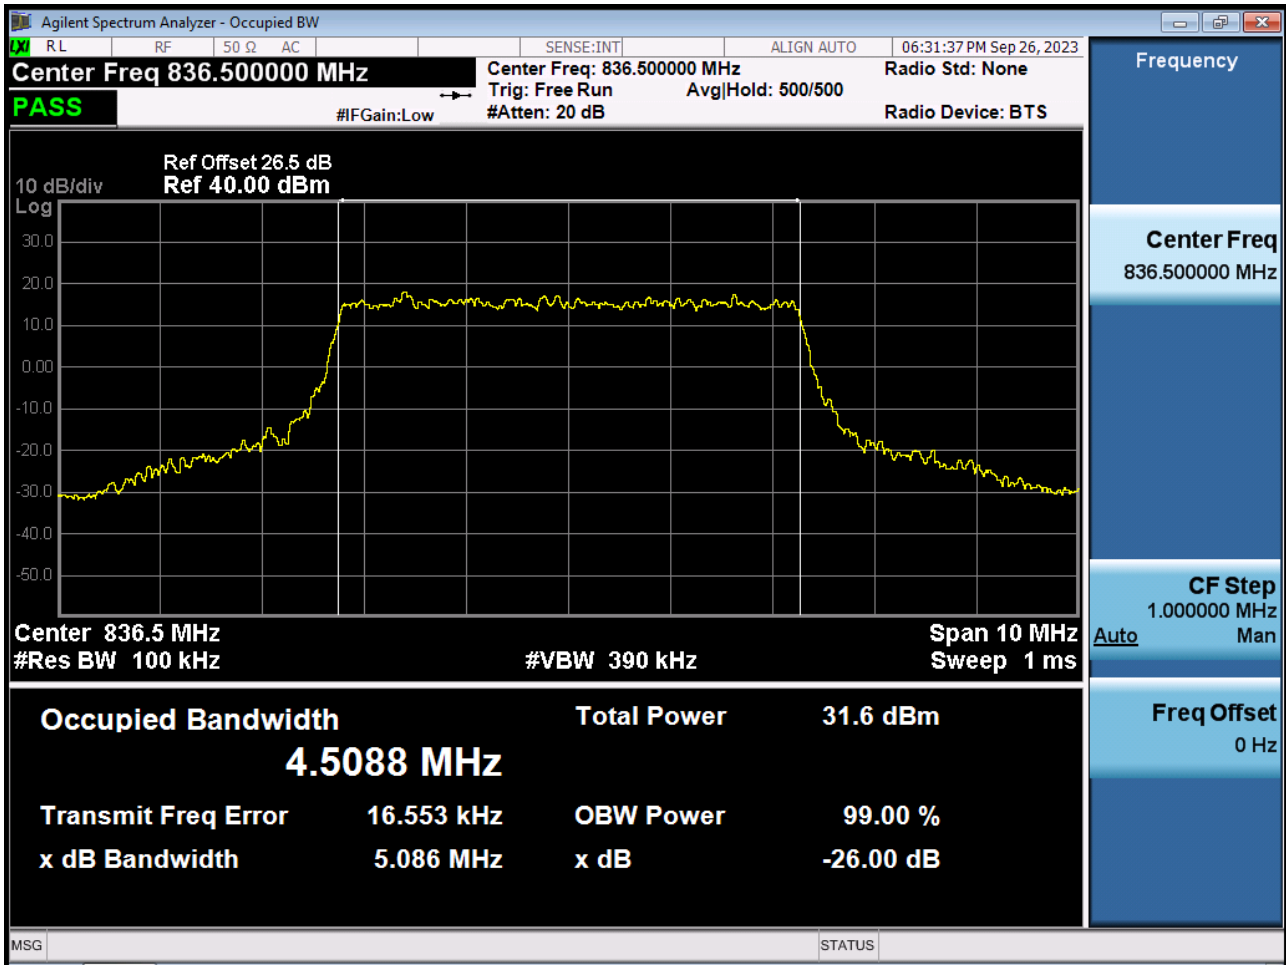


BAND5/26. Occupied Bandwidth Plot (5 M BW Ch.26915 16QAM\_RB25\_0)

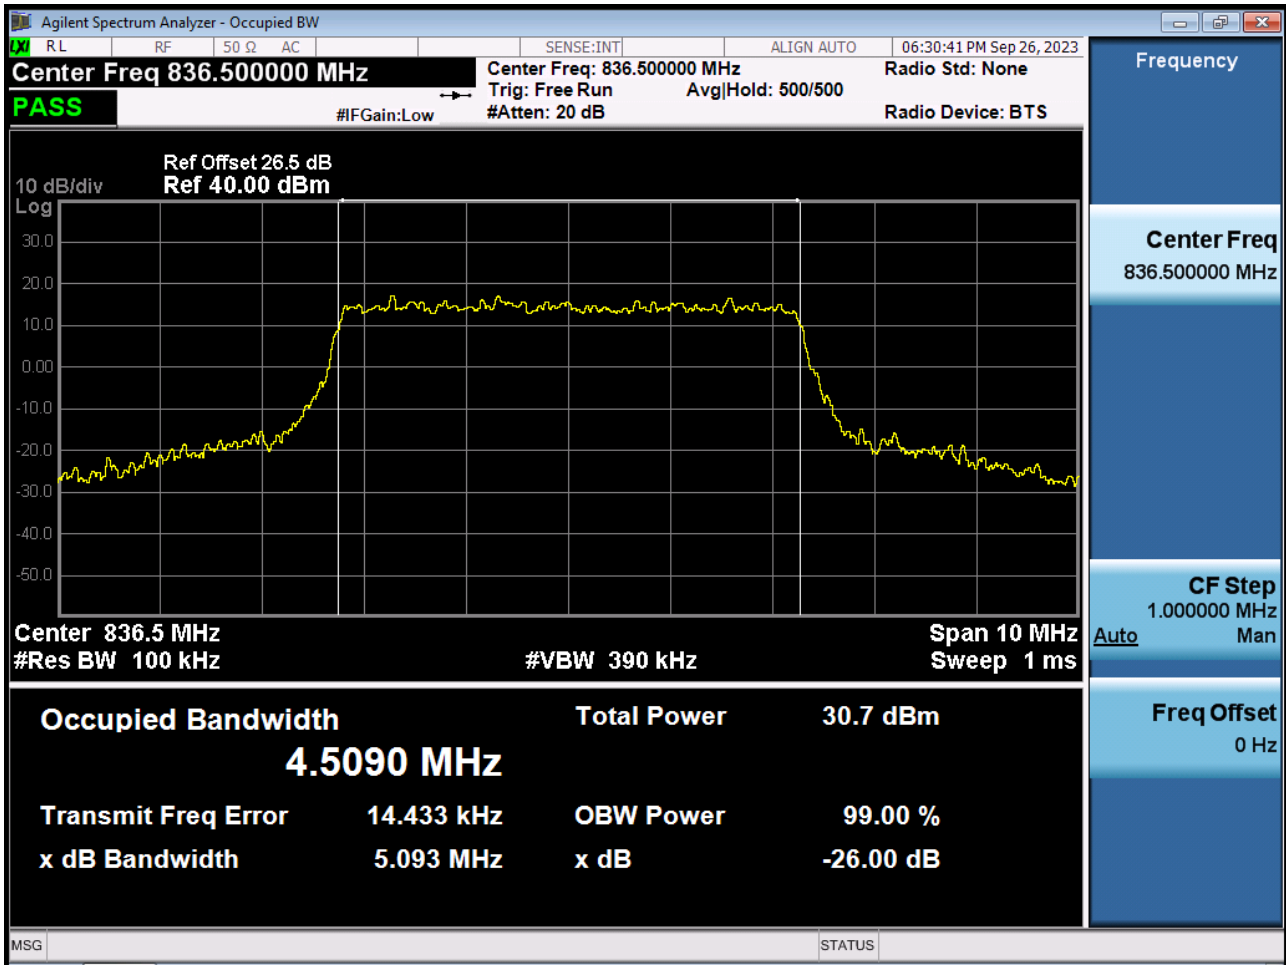


BAND5/26. Occupied Bandwidth Plot (5 M BW Ch.26915 64QAM\_RB25\_0)

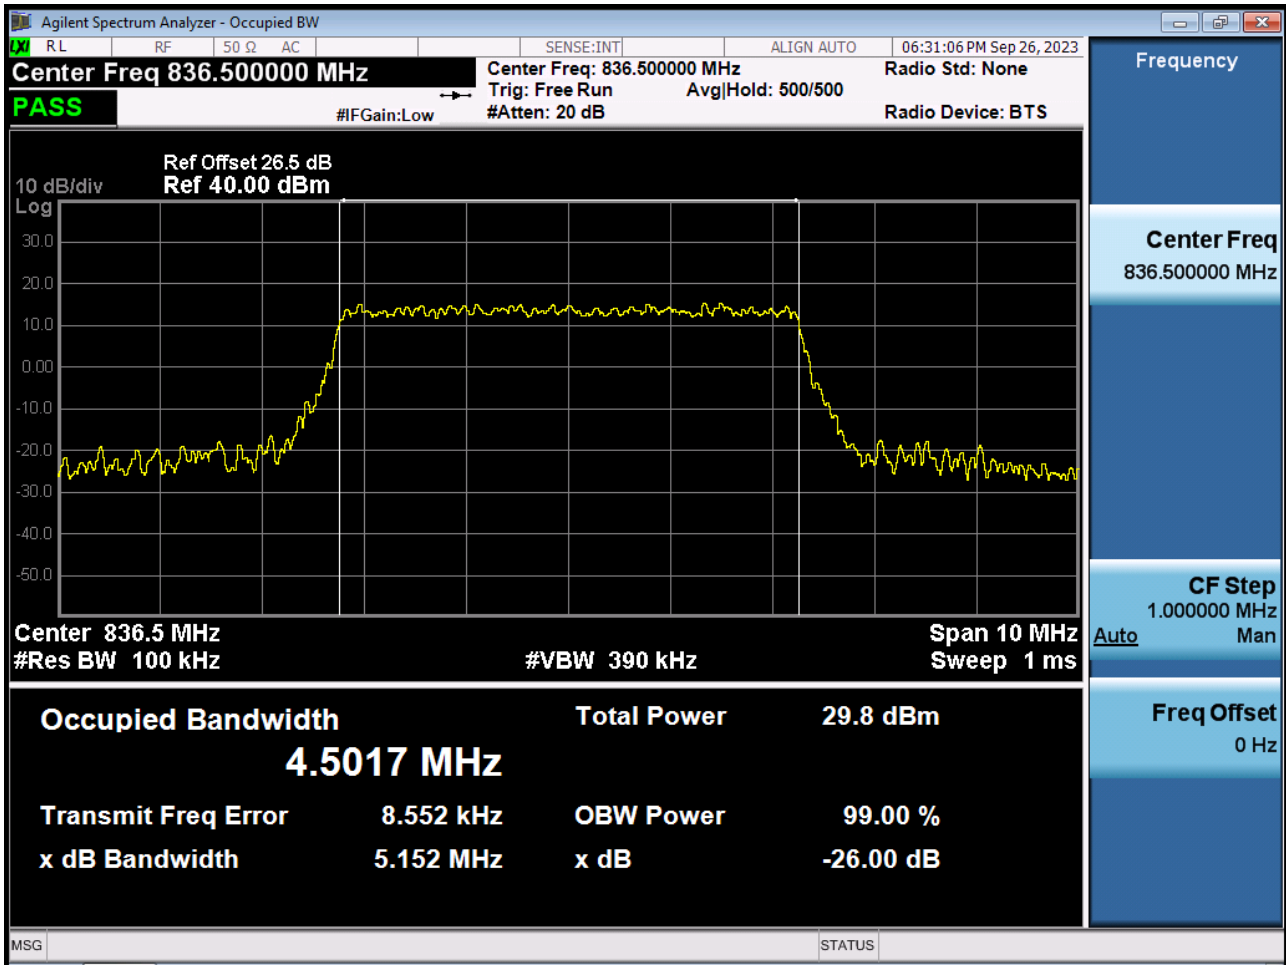


BAND5/26. Occupied Bandwidth Plot (5 M BW Ch.26915 256QAM\_RB25\_0)

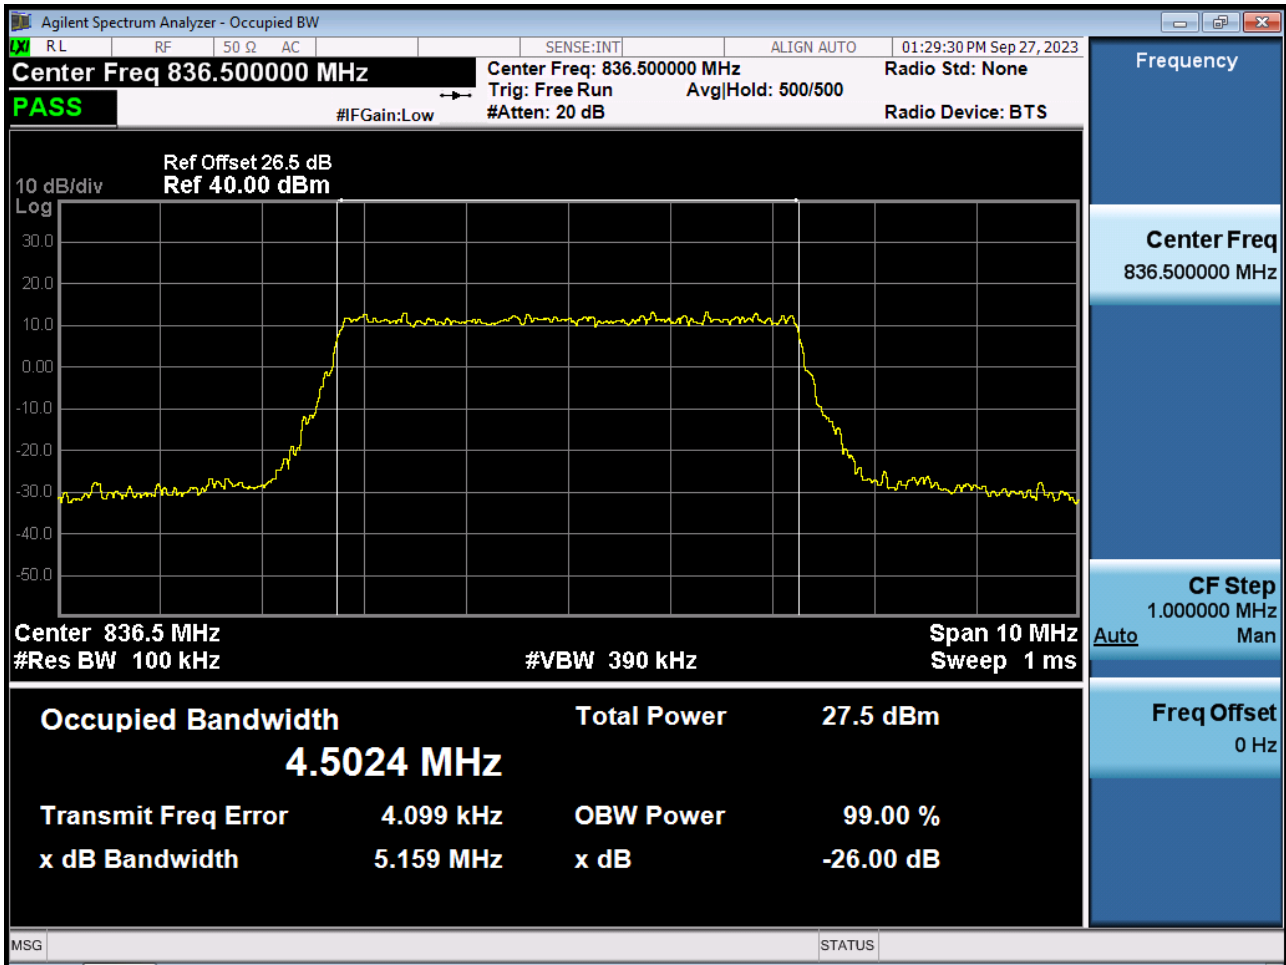


BAND5/26. Occupied Bandwidth Plot (10 M BW Ch.26915 QPSK\_RB50\_0)

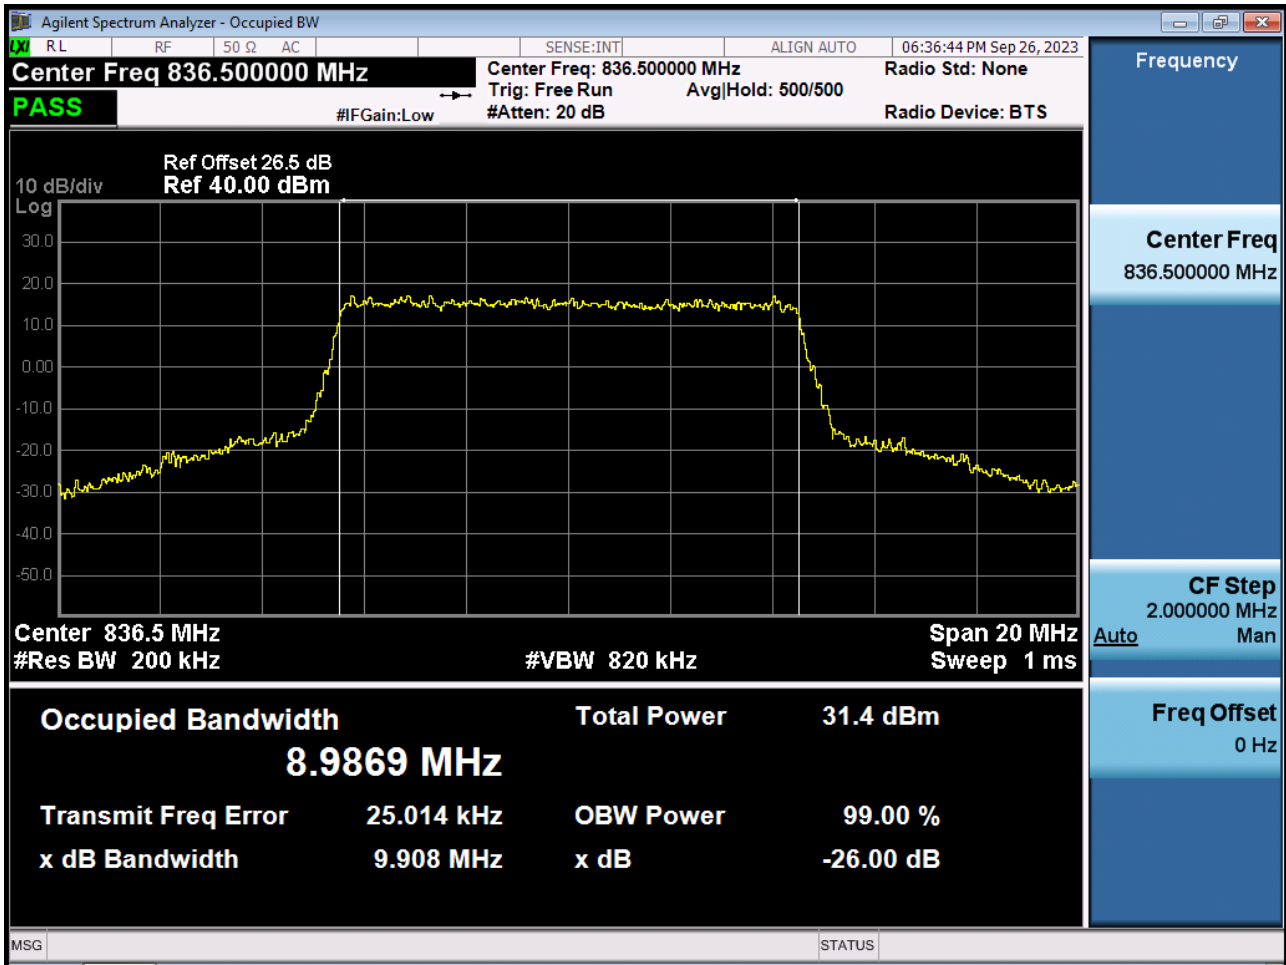


BAND5/26. Occupied Bandwidth Plot (10 M BW Ch.26915 16QAM\_RB50\_0)

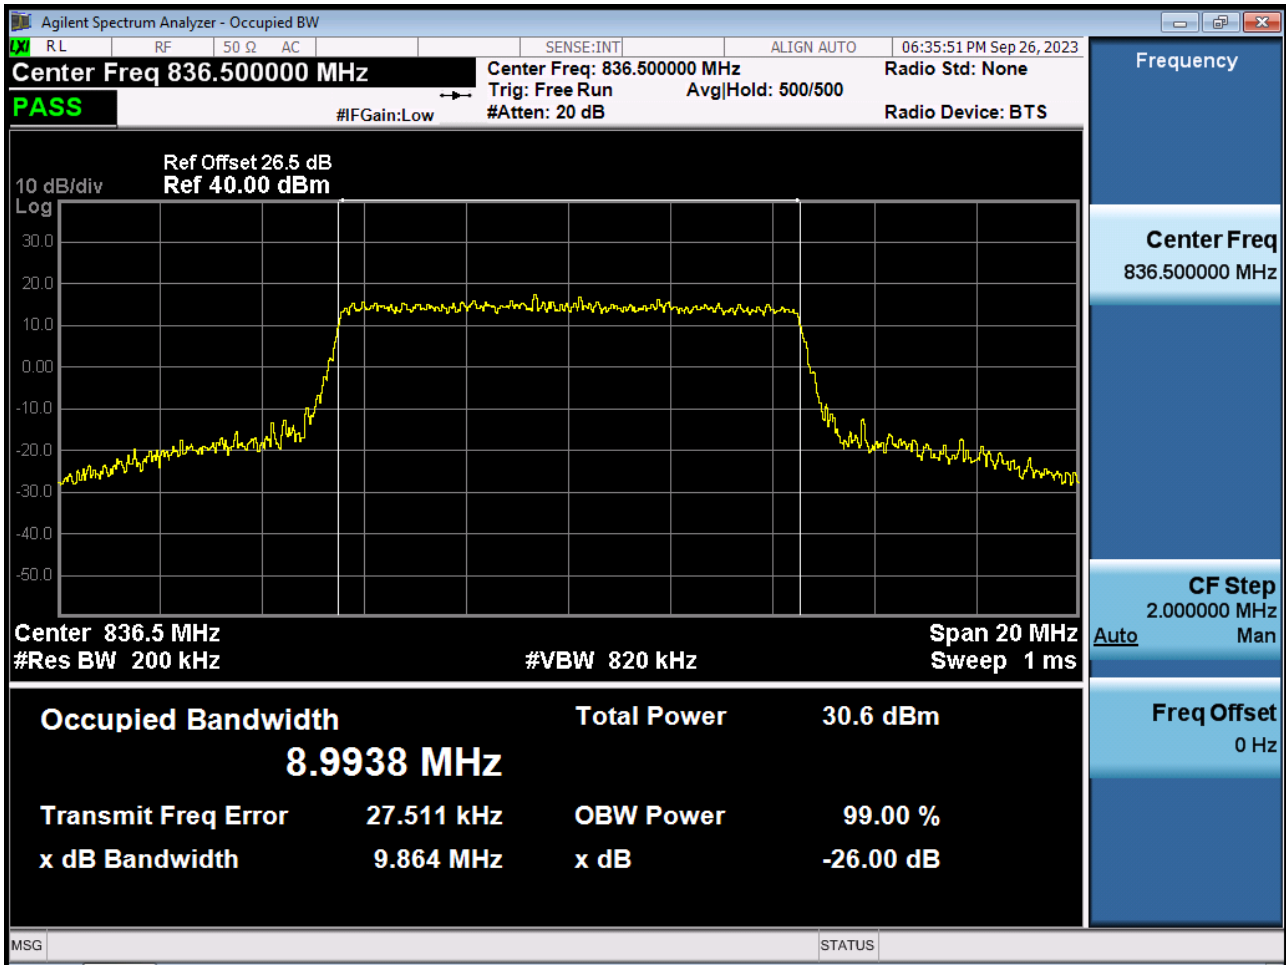

BAND5/26. Occupied Bandwidth Plot (10 M BW Ch.26915 64QAM\_RB50\_0)

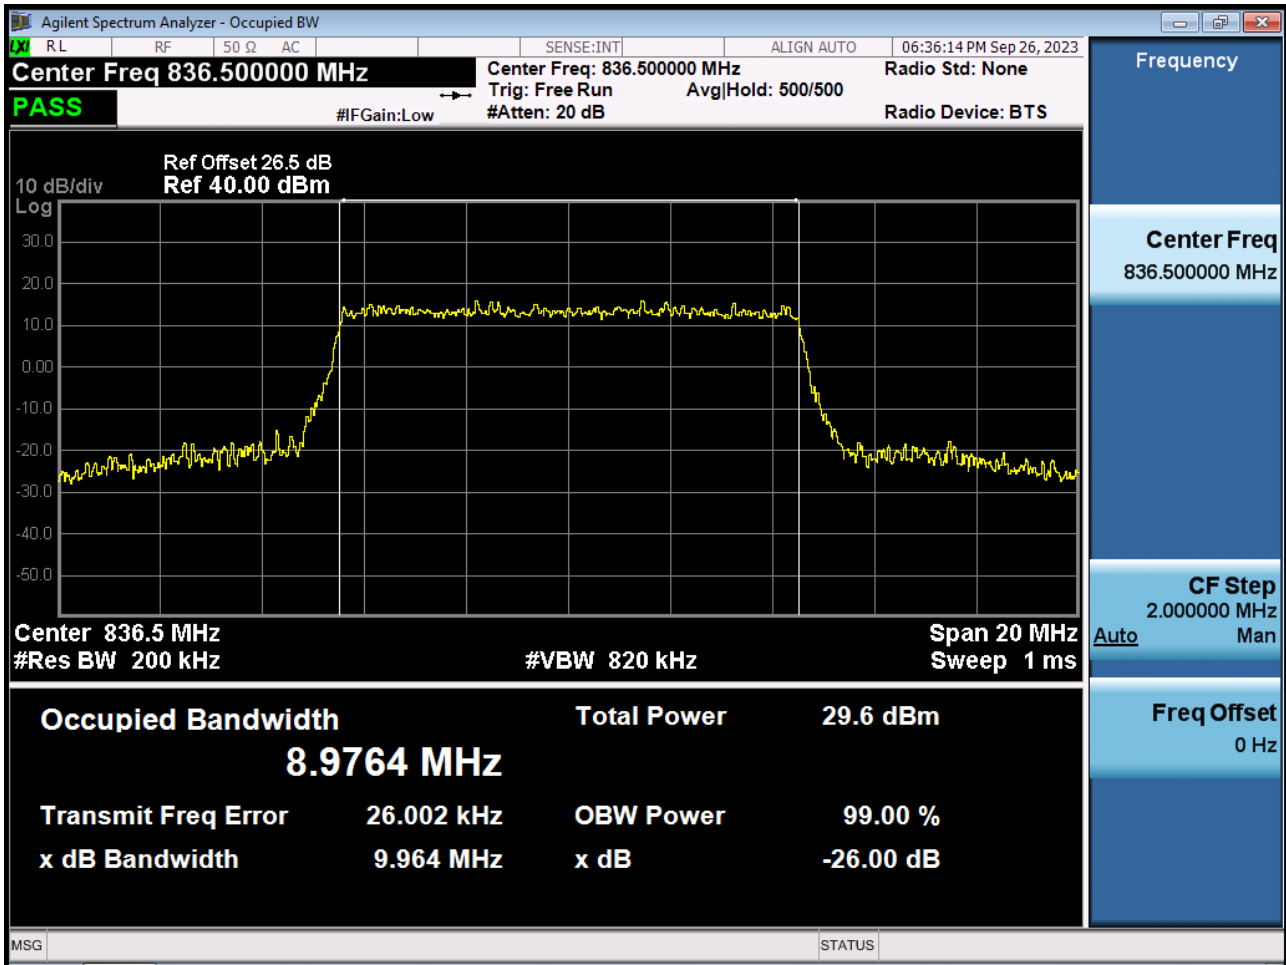


BAND5/26. Occupied Bandwidth Plot (10 M BW Ch.26915 256QAM\_RB50\_0)

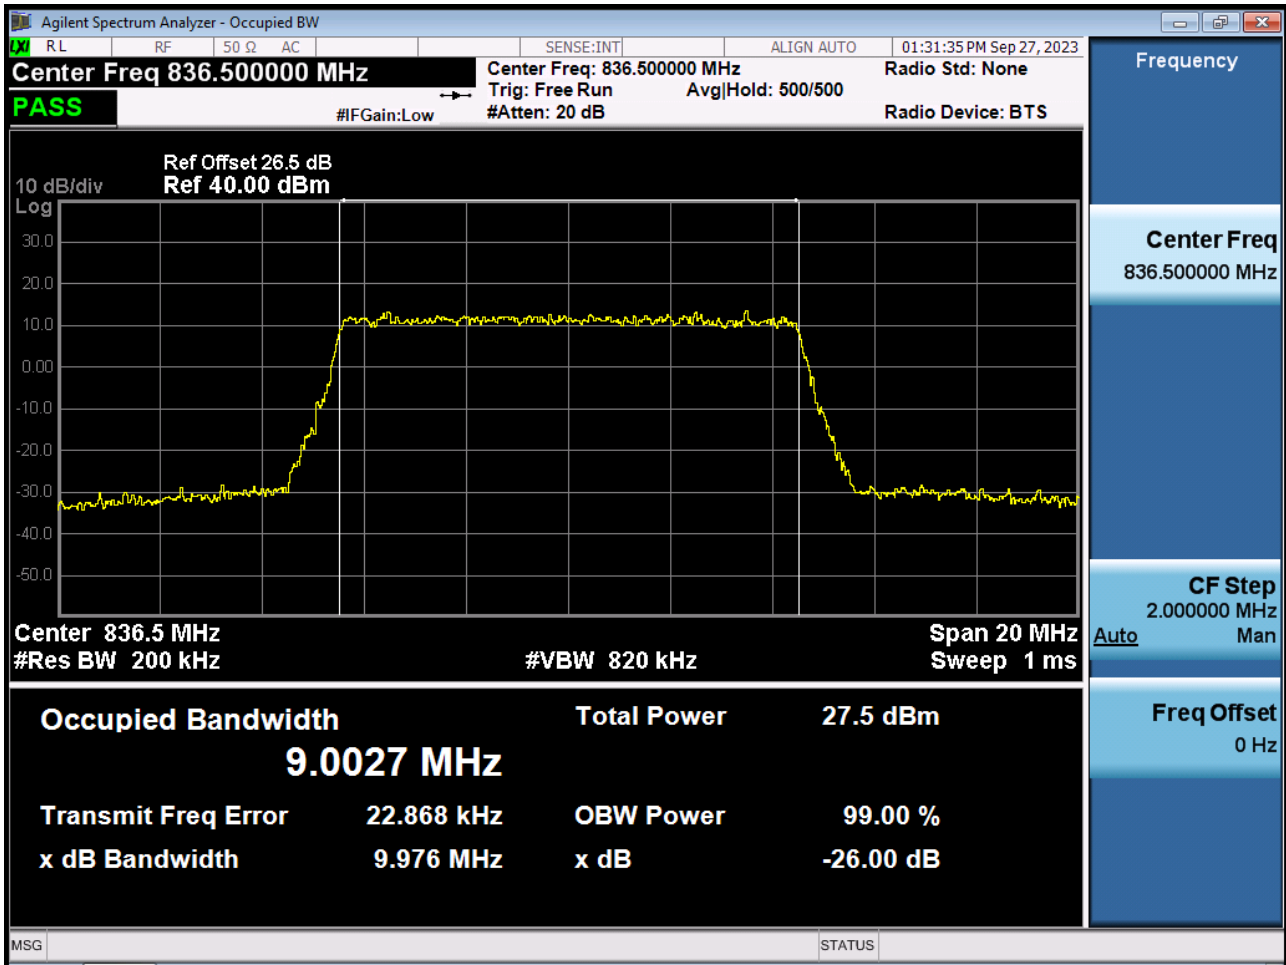





BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26915 QPSK RB 75\_0)

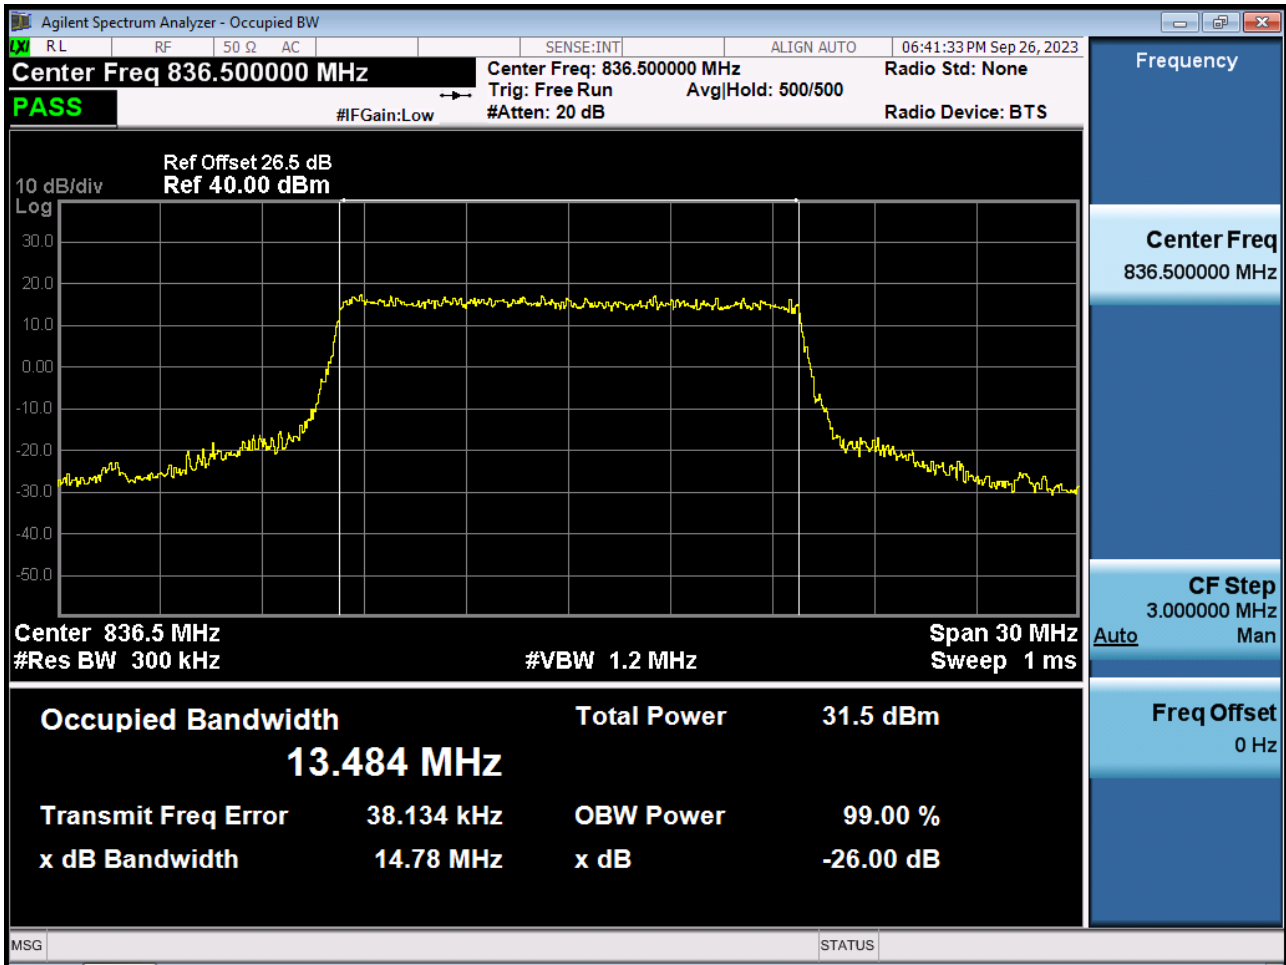


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26915 16QAM RB 75\_0)

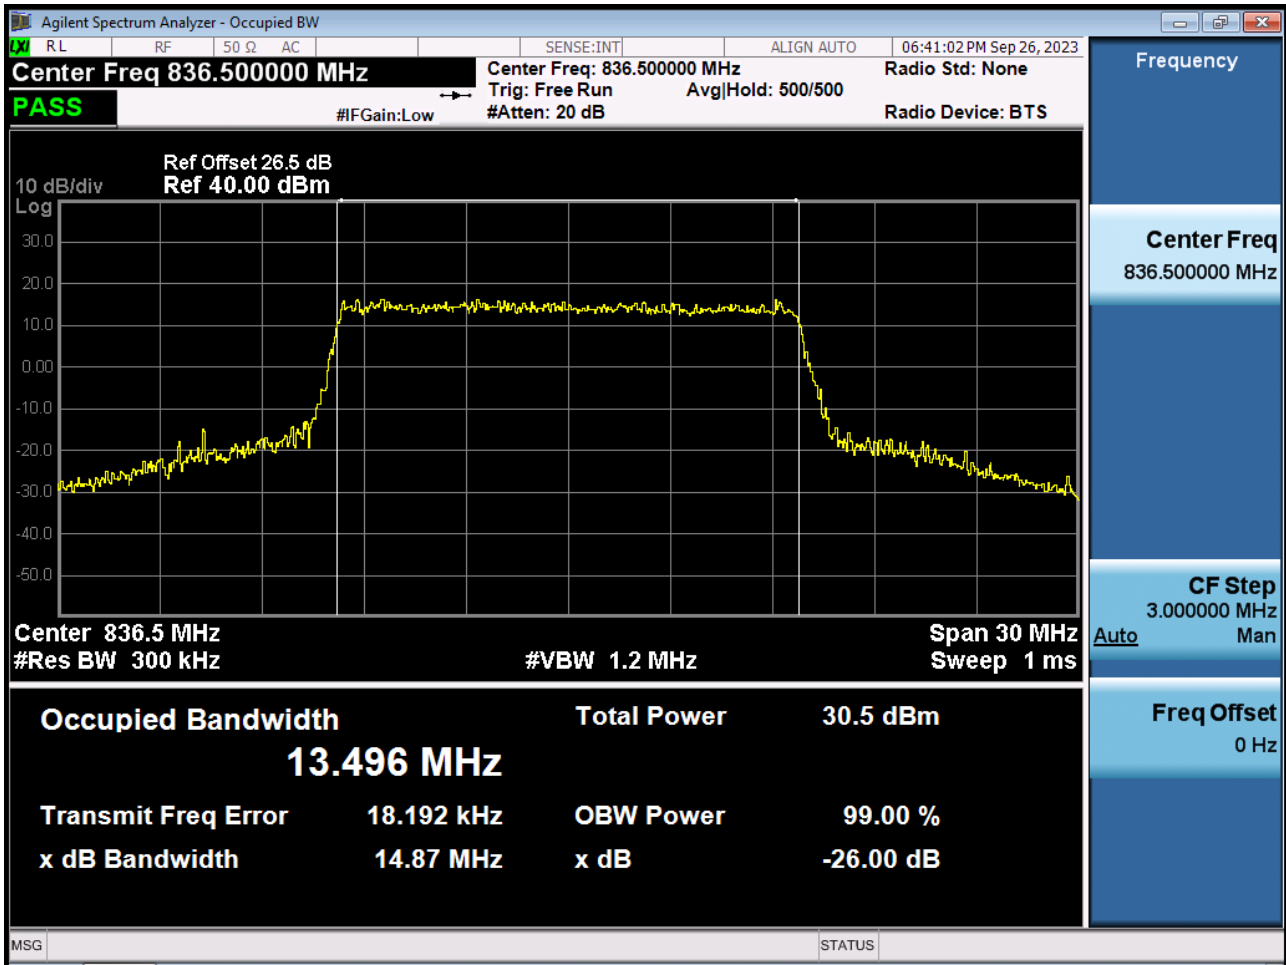


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26915 64QAM RB 75\_0)

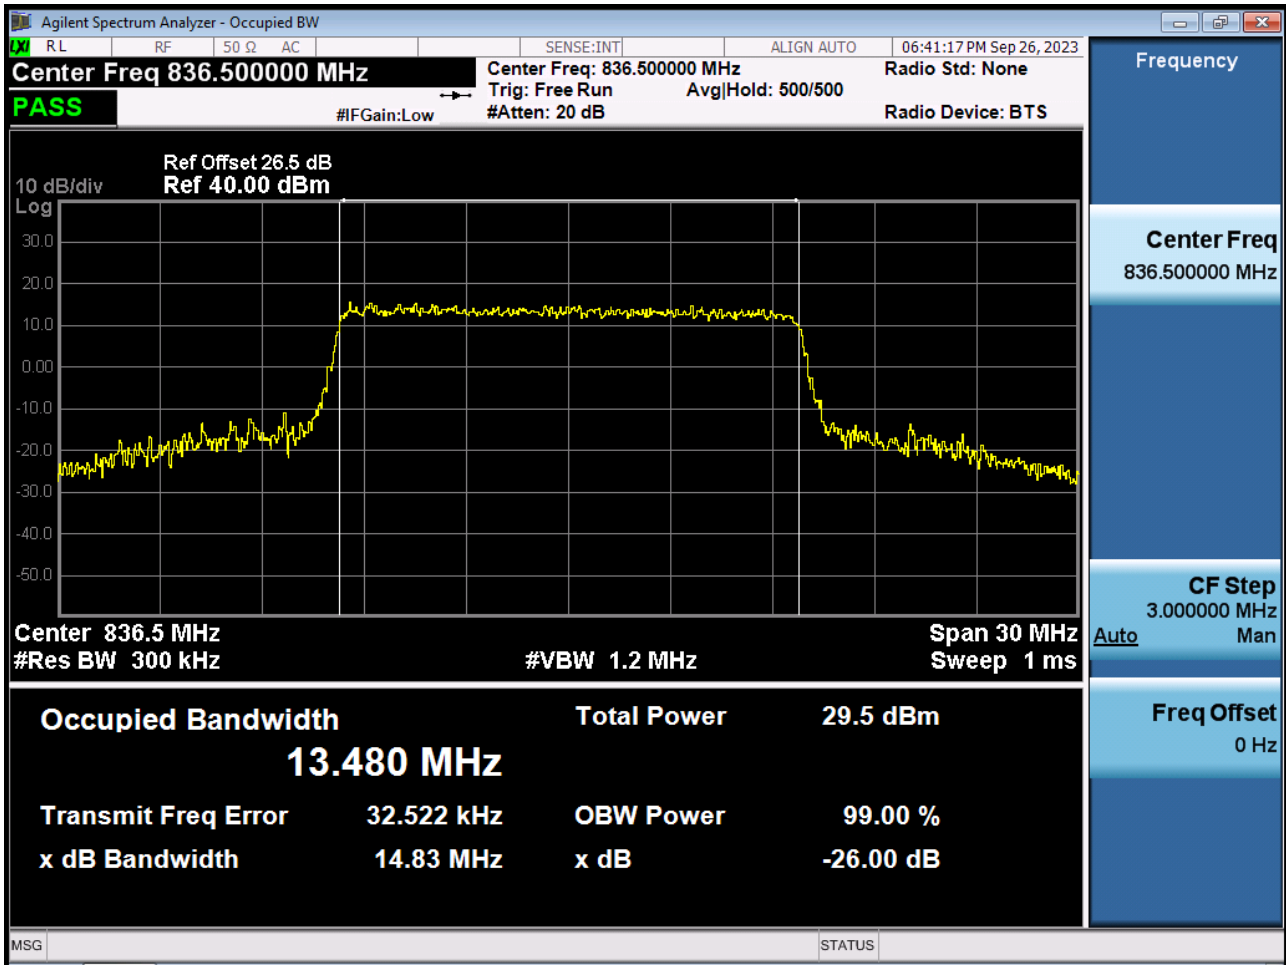


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26915 256QAM RB 75\_0)

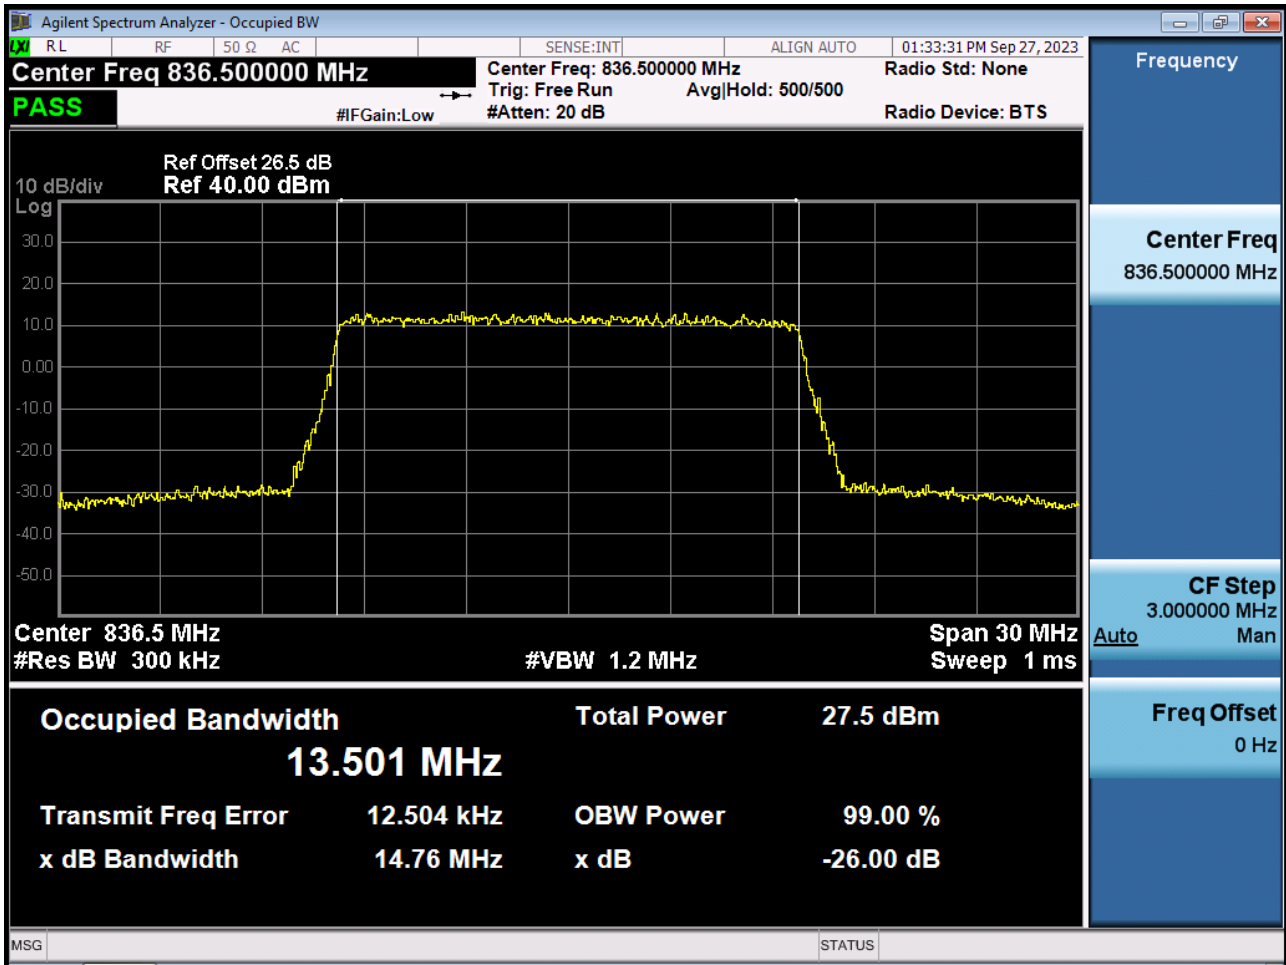


BAND5/26. PAR Plot (1.4 M BW Ch.26915 QPSK\_RB6\_0)

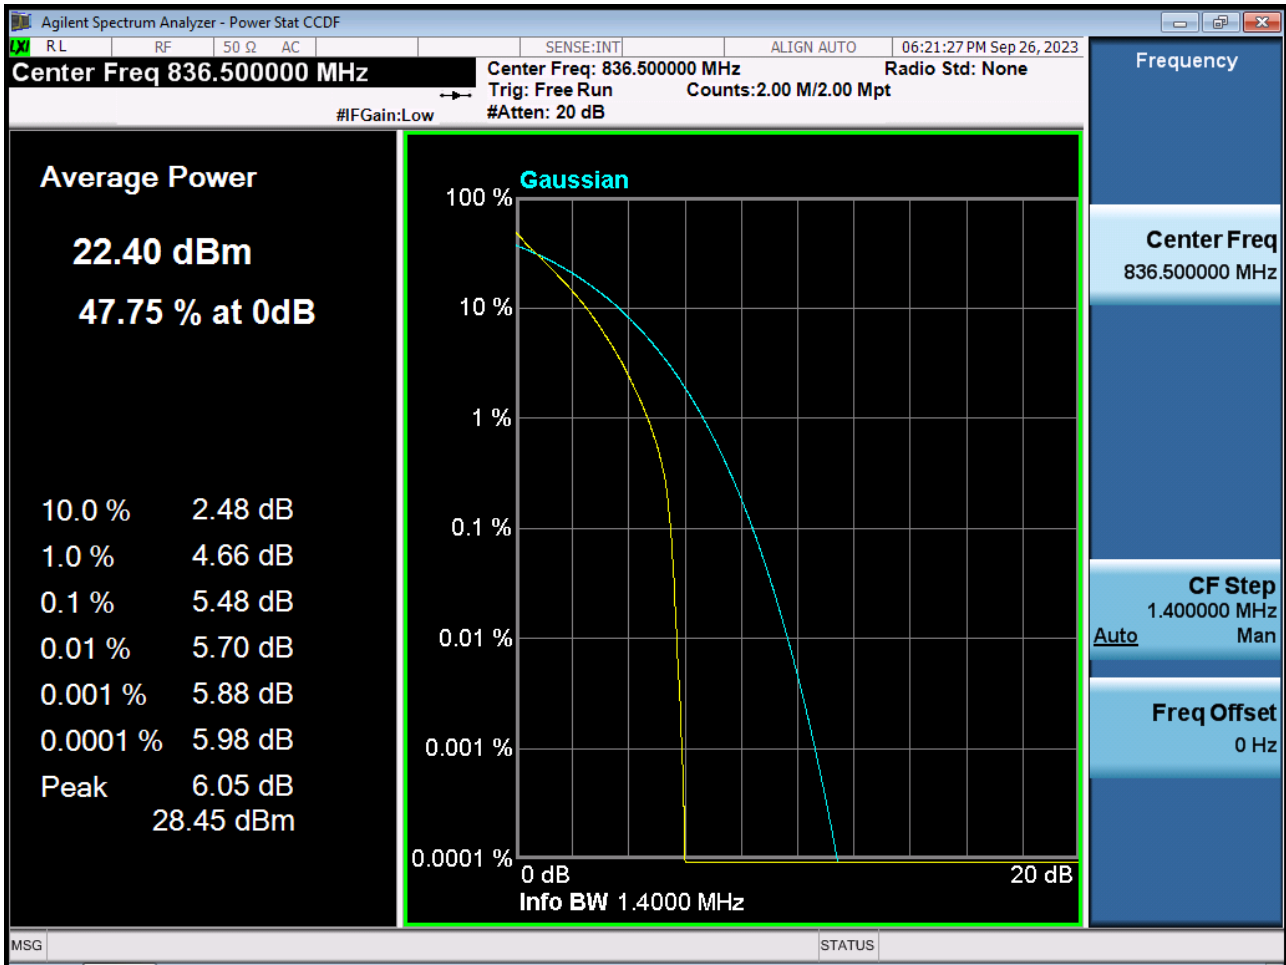


BAND5/26. PAR Plot (1.4 M BW Ch.26915 16QAM\_RB6\_0)

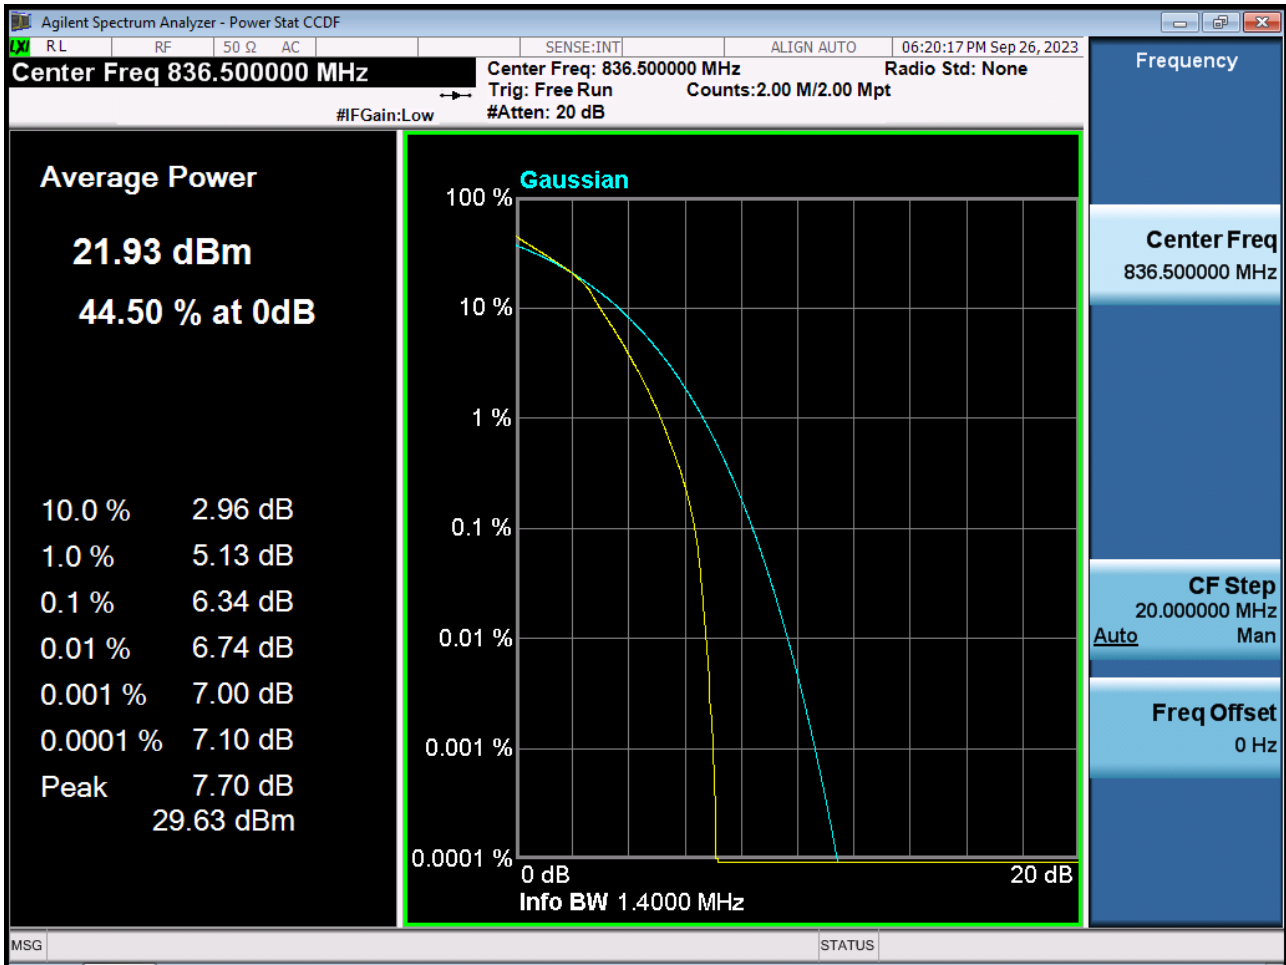

BAND5/26. PAR Plot (1.4 M BW Ch.26915 64QAM\_RB6\_0)

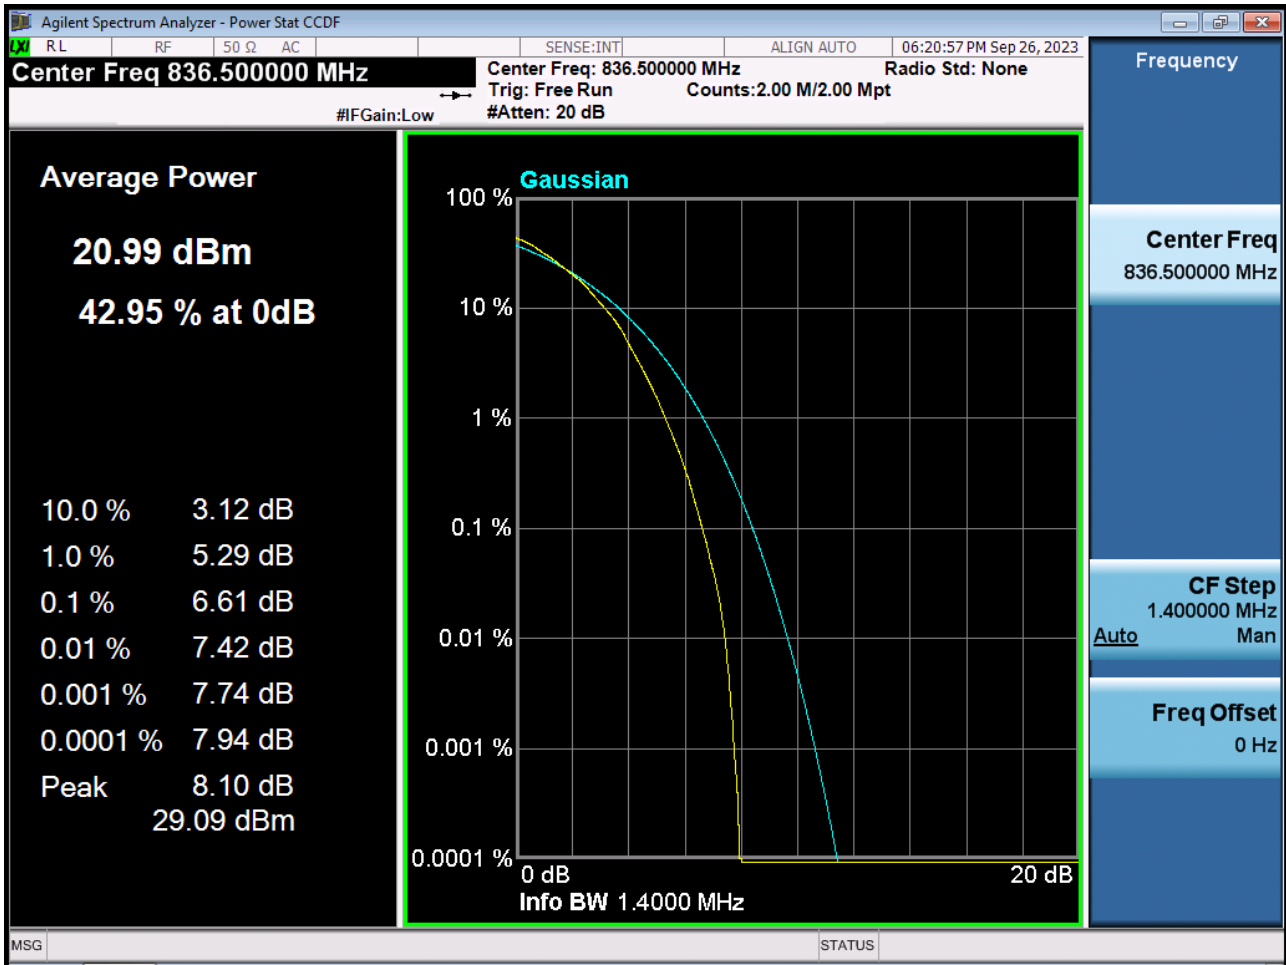


BAND5/26. PAR Plot (1.4 M BW Ch.26915 256QAM\_RB6\_0)

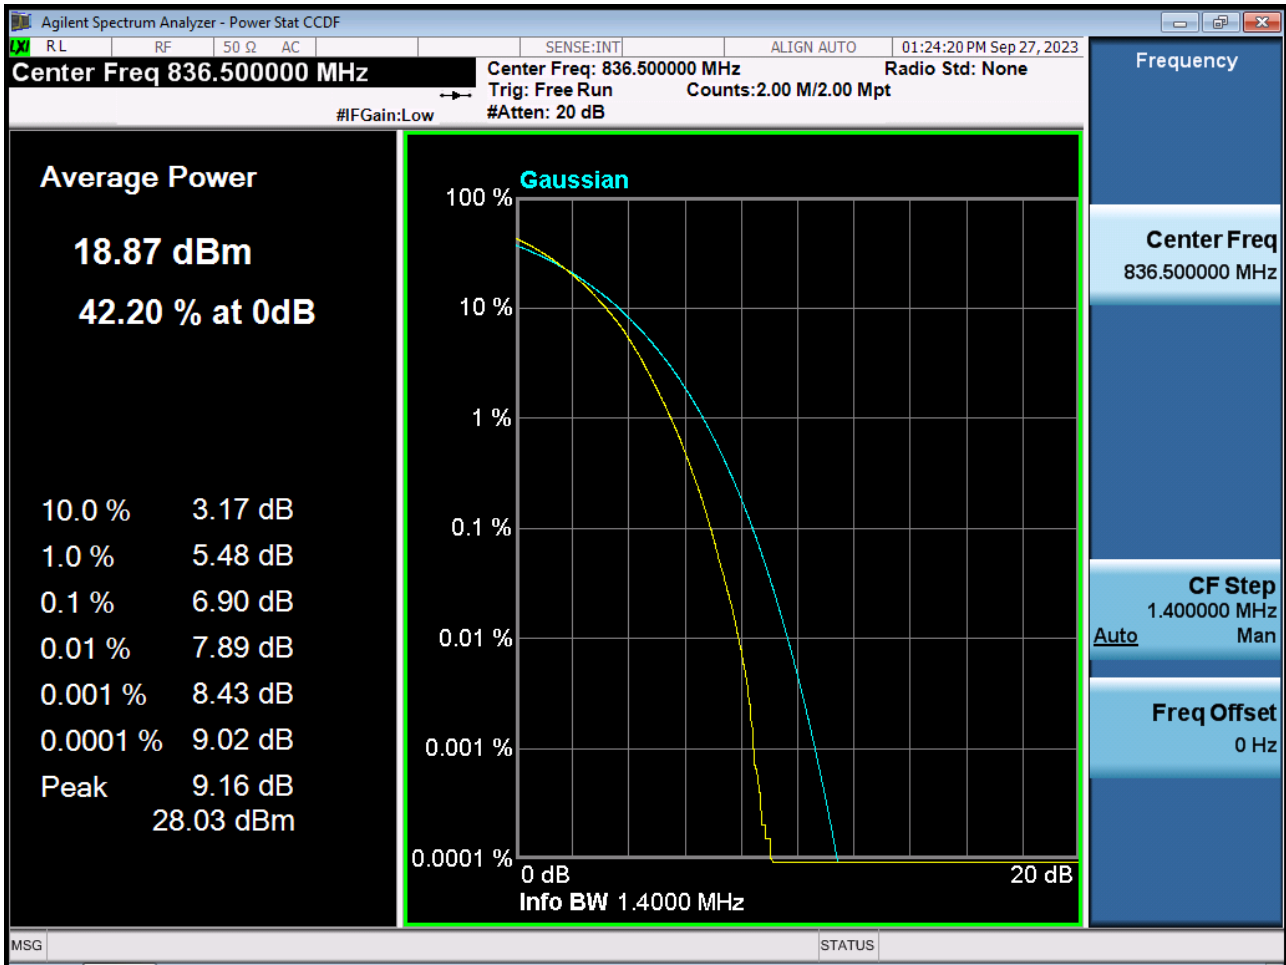





BAND5/26. PAR Plot (3 M BW Ch.26915 QPSK\_RB15\_0)

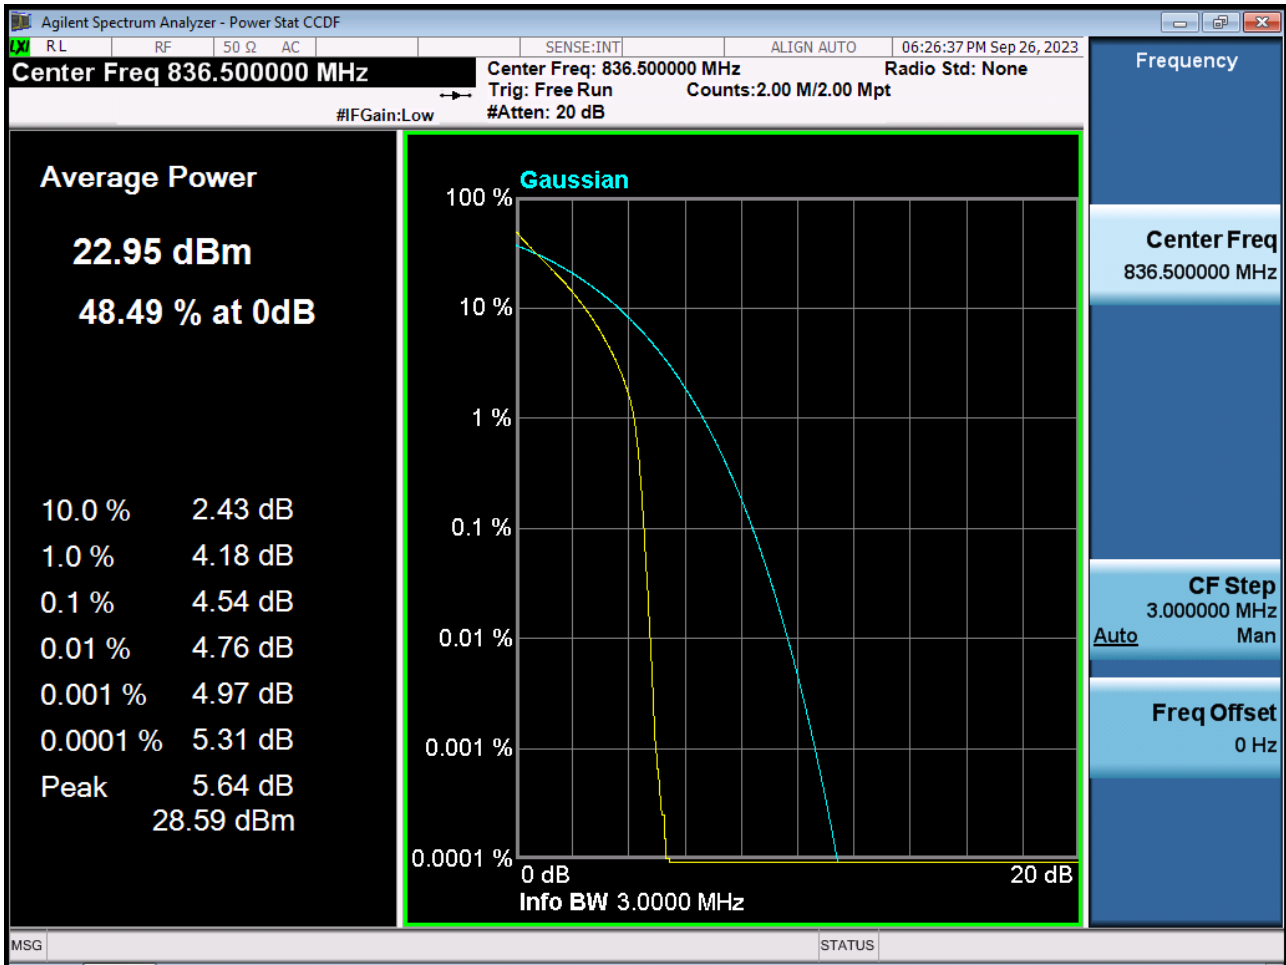


BAND5/26 PAR Plot (3 M BW Ch.26915 16QAM\_RB15\_0)

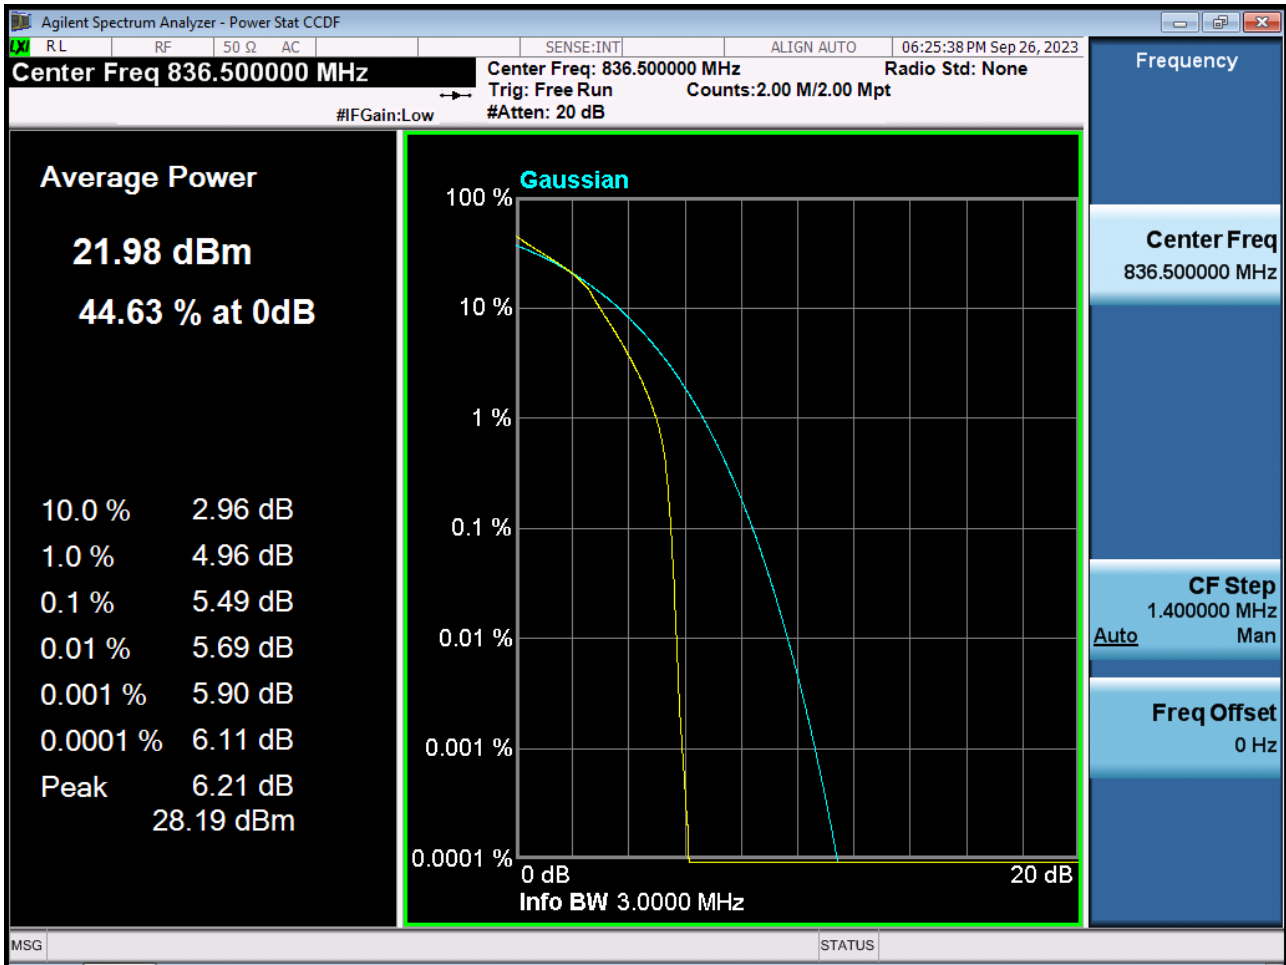


BAND5/26. PAR Plot (3 M BW Ch.26915 64QAM\_RB15\_0)

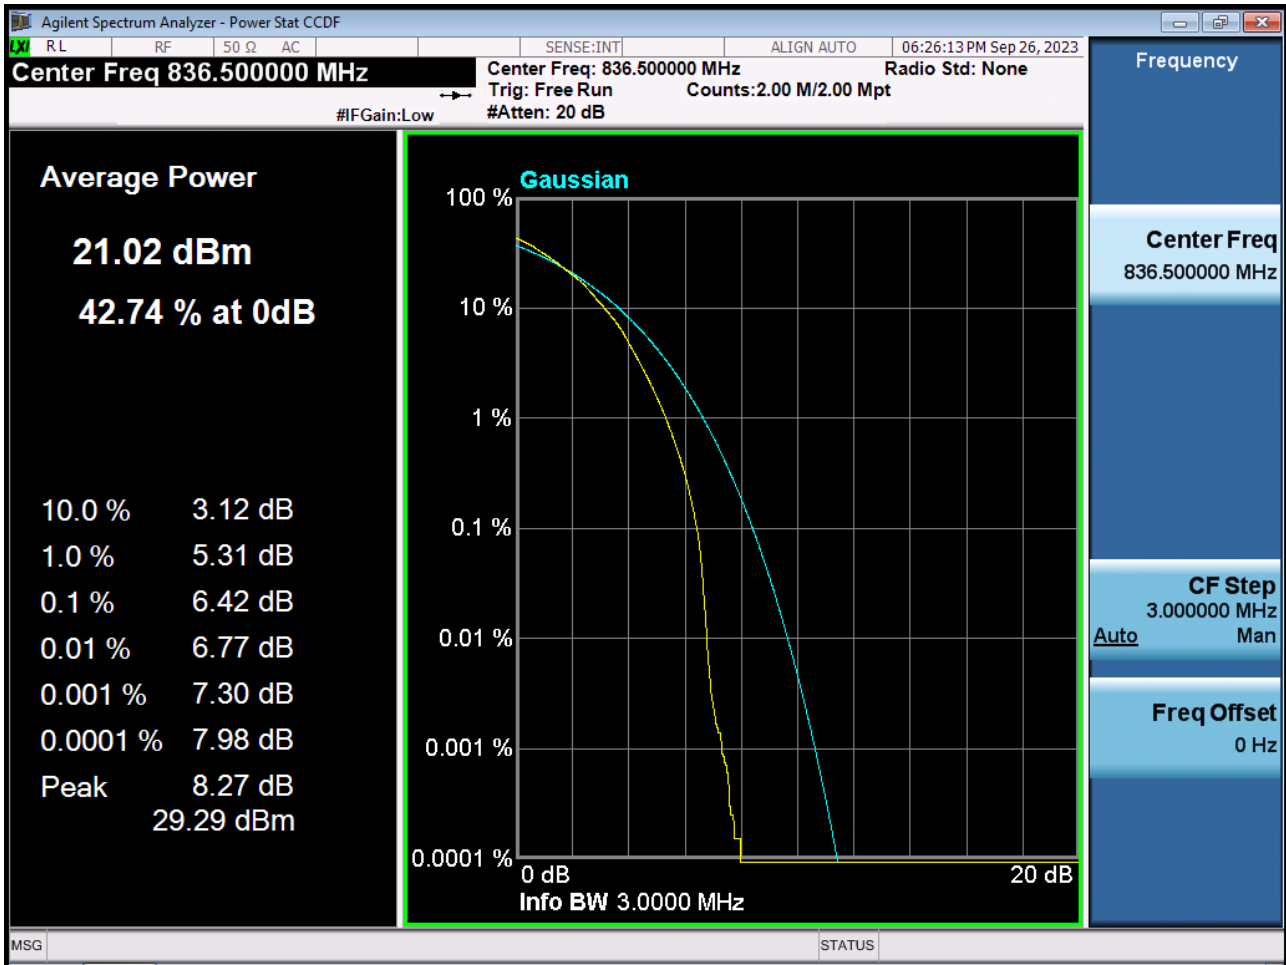


BAND5/26. PAR Plot (3 M BW Ch.26915 256QAM\_RB15\_0)

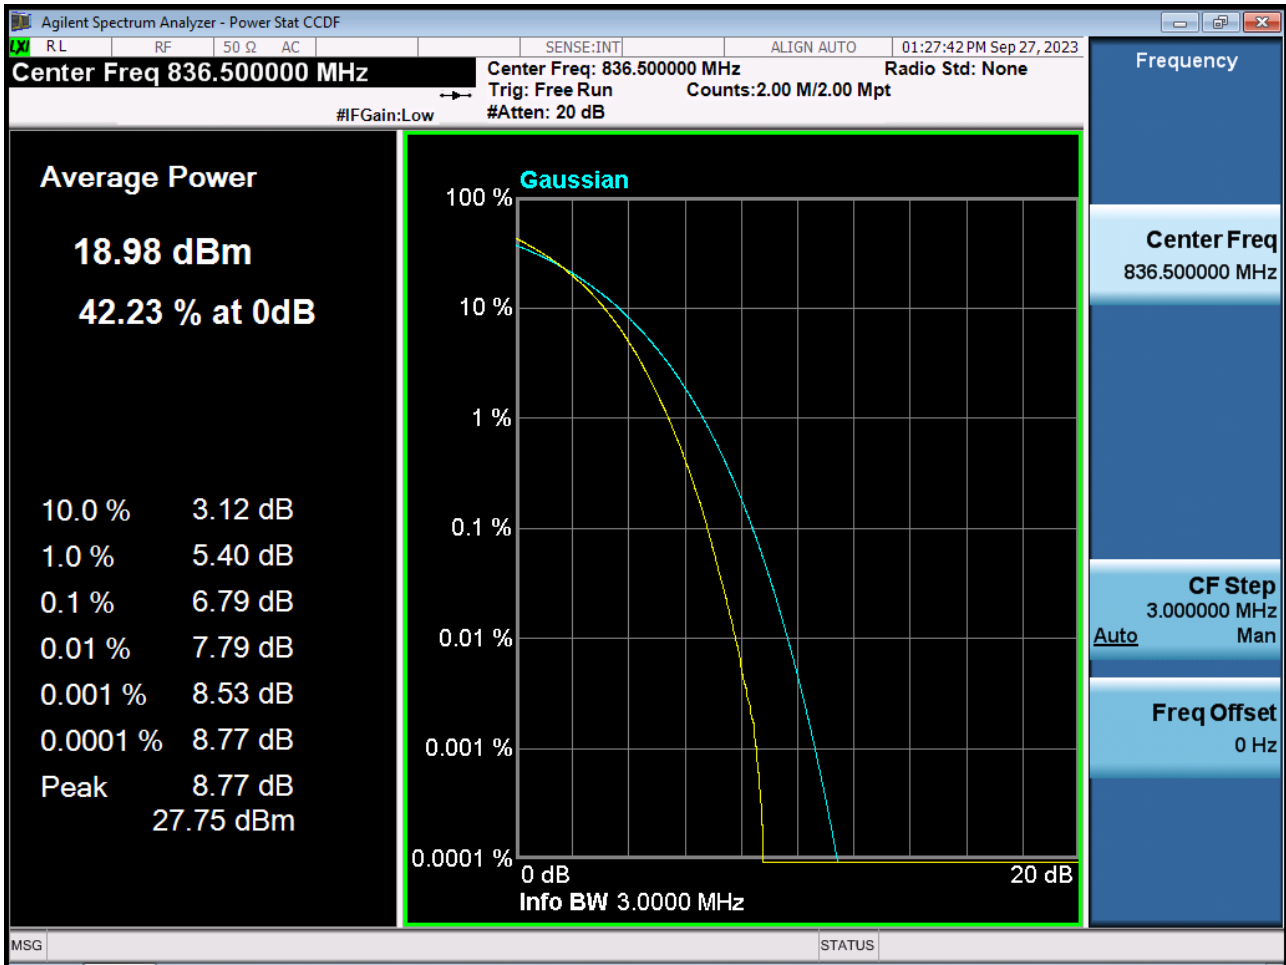


BAND5/26. PAR Plot (5 M BW Ch.26915 QPSK\_RB25\_0)

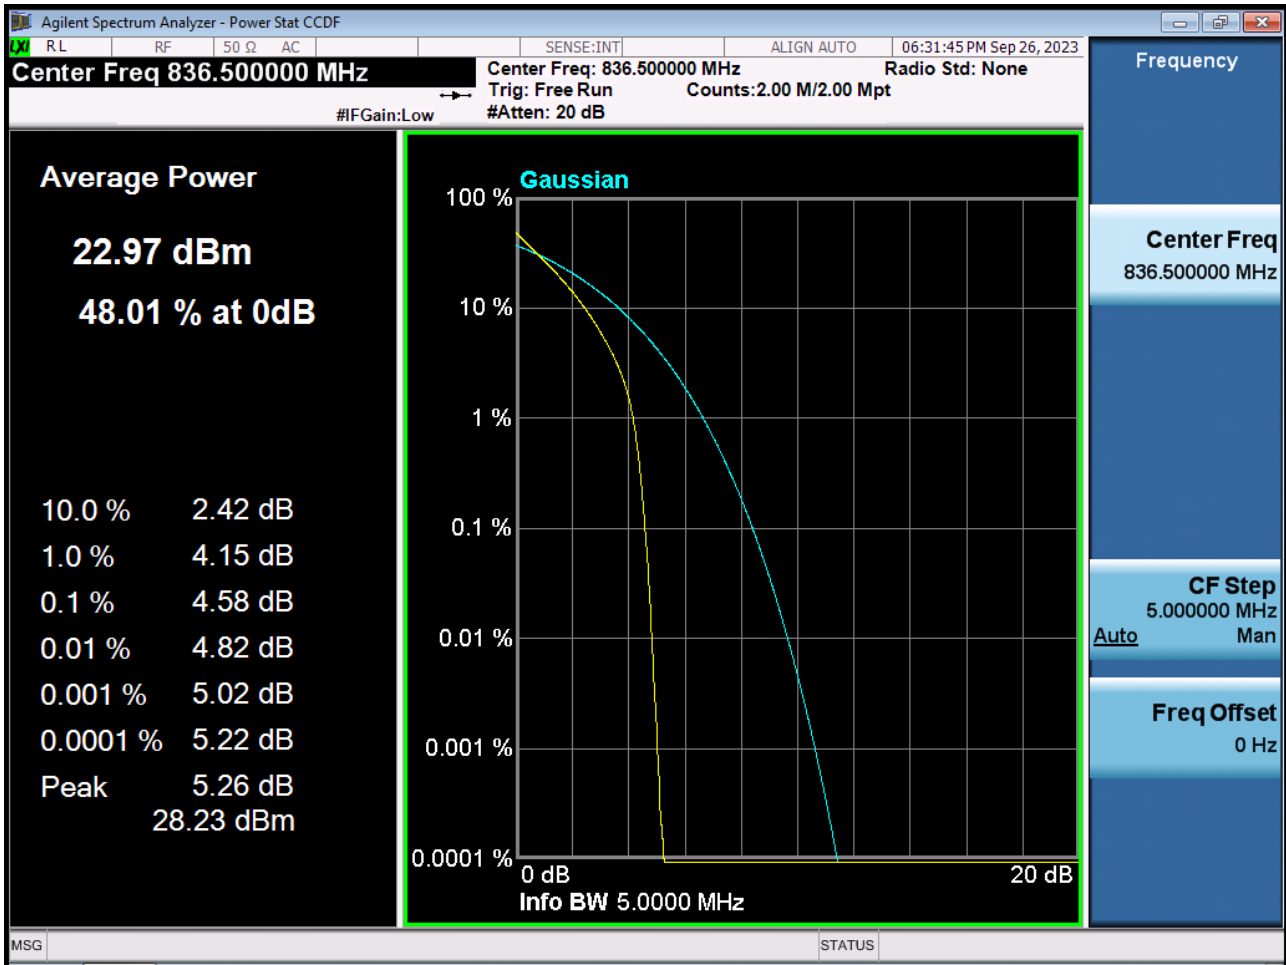


BAND5/26. PAR Plot (5 M BW Ch.26915 16QAM\_RB25\_0)

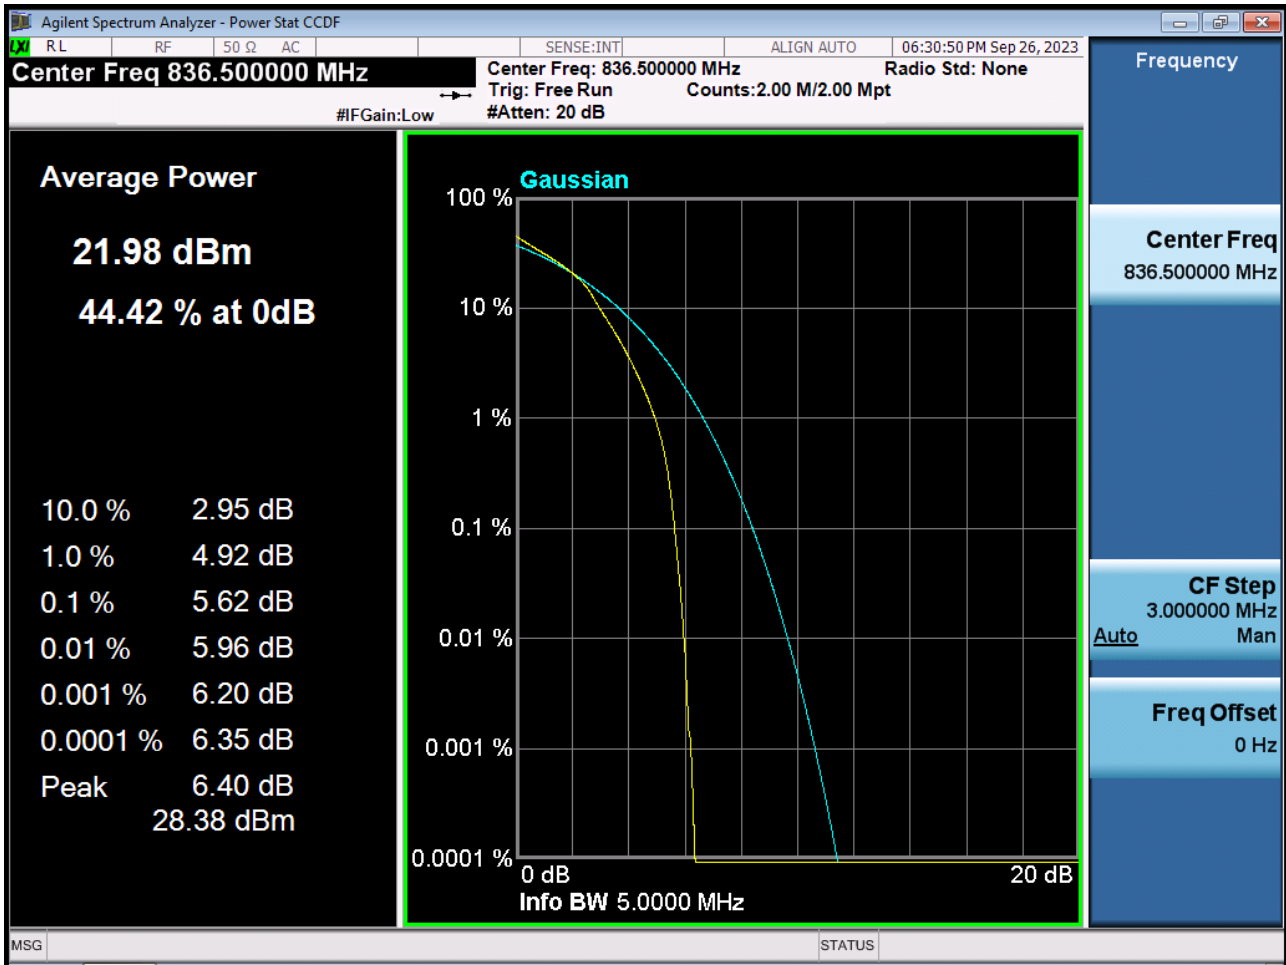

BAND5/26. PAR Plot (5 M BW Ch.26915 64QAM\_RB25\_0)

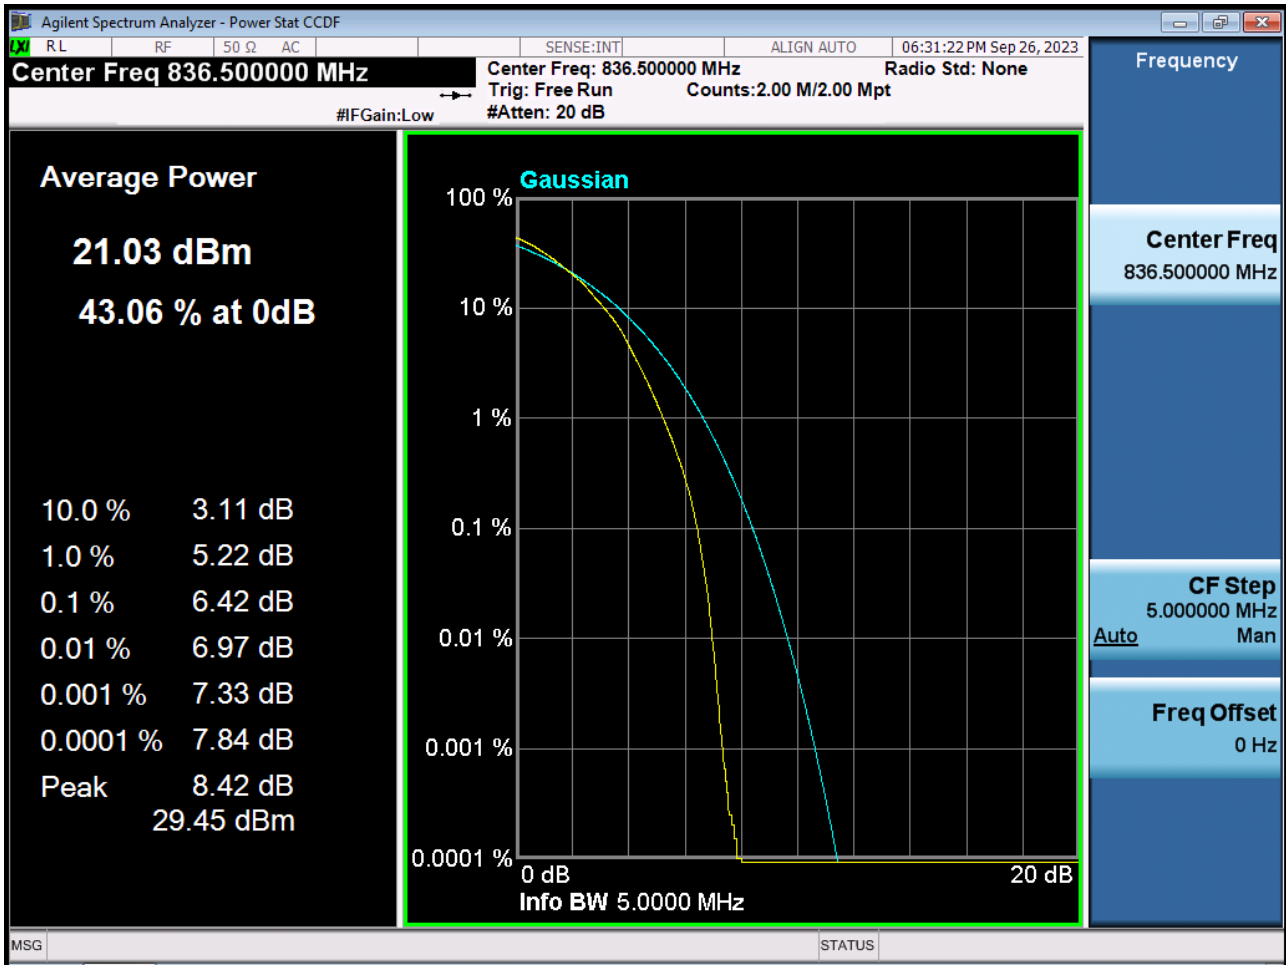


BAND5/26. PAR Plot (5 M BW Ch.26915 256QAM\_RB25\_0)

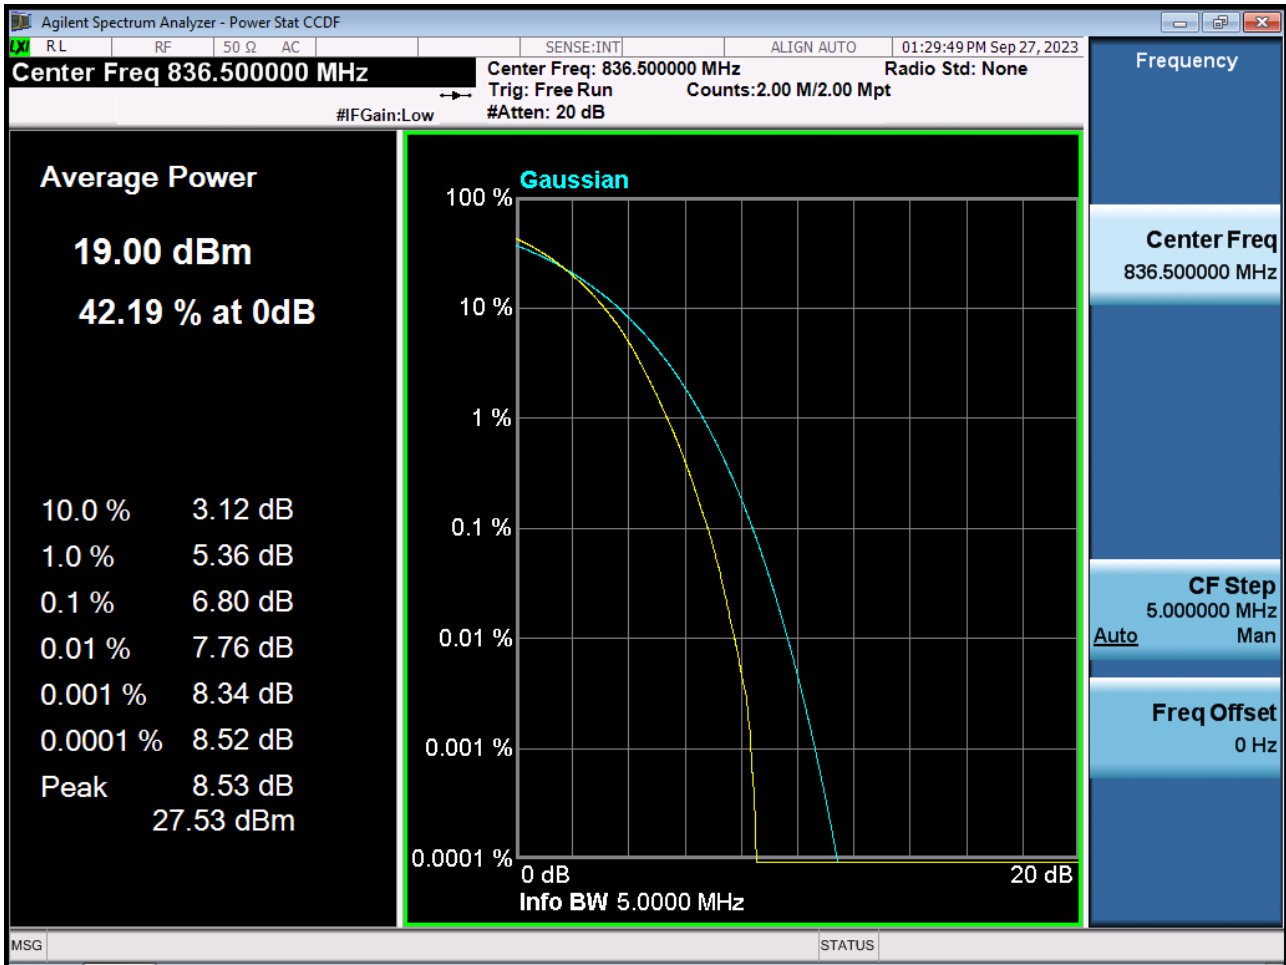





BAND5/26. PAR Plot (10 M BW Ch.26915 QPSK\_RB50\_0)

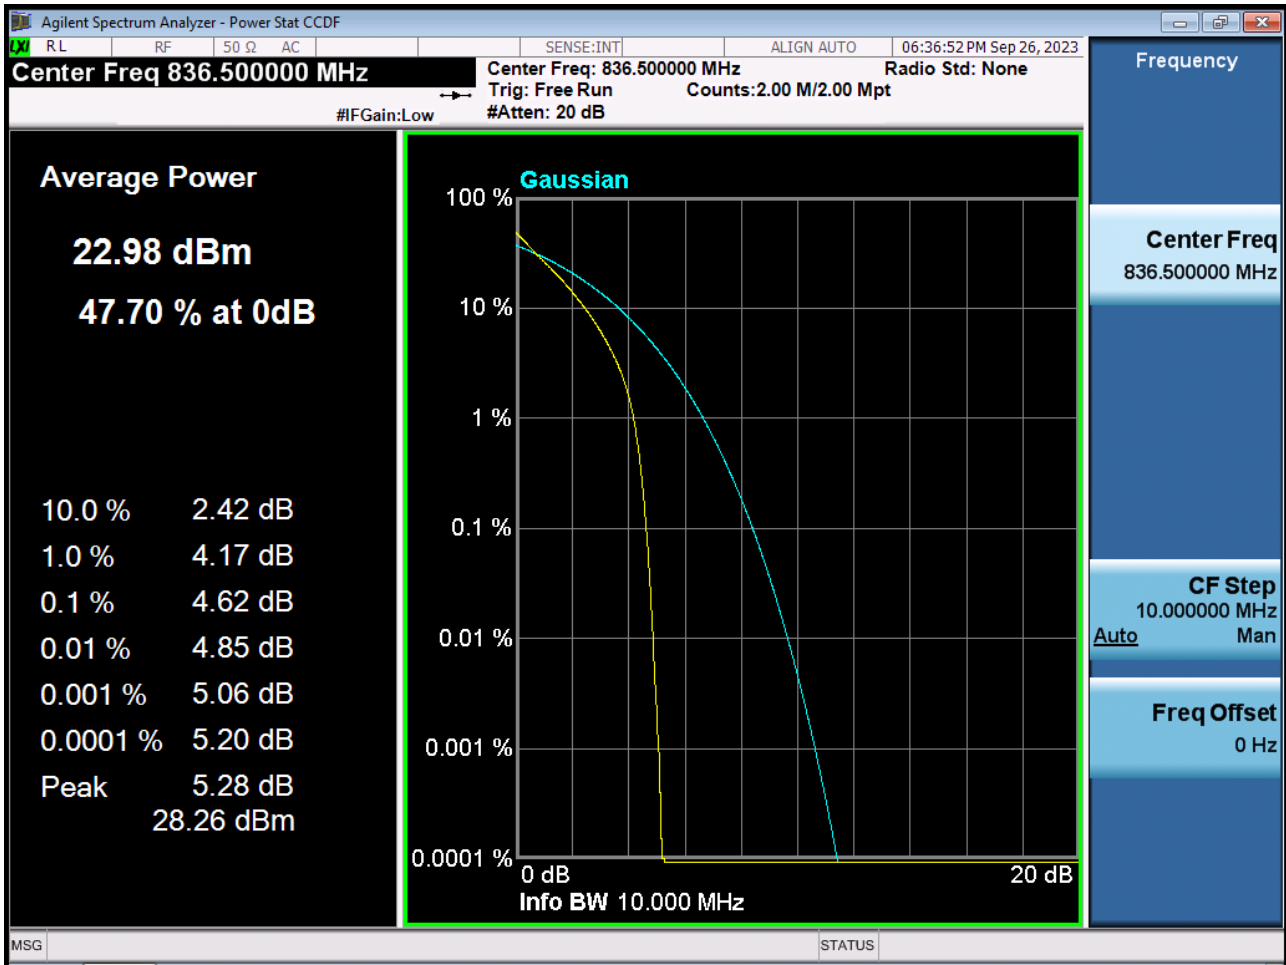


BAND5/26. PAR Plot (10 M BW Ch.26915 16QAM\_RB50\_0)

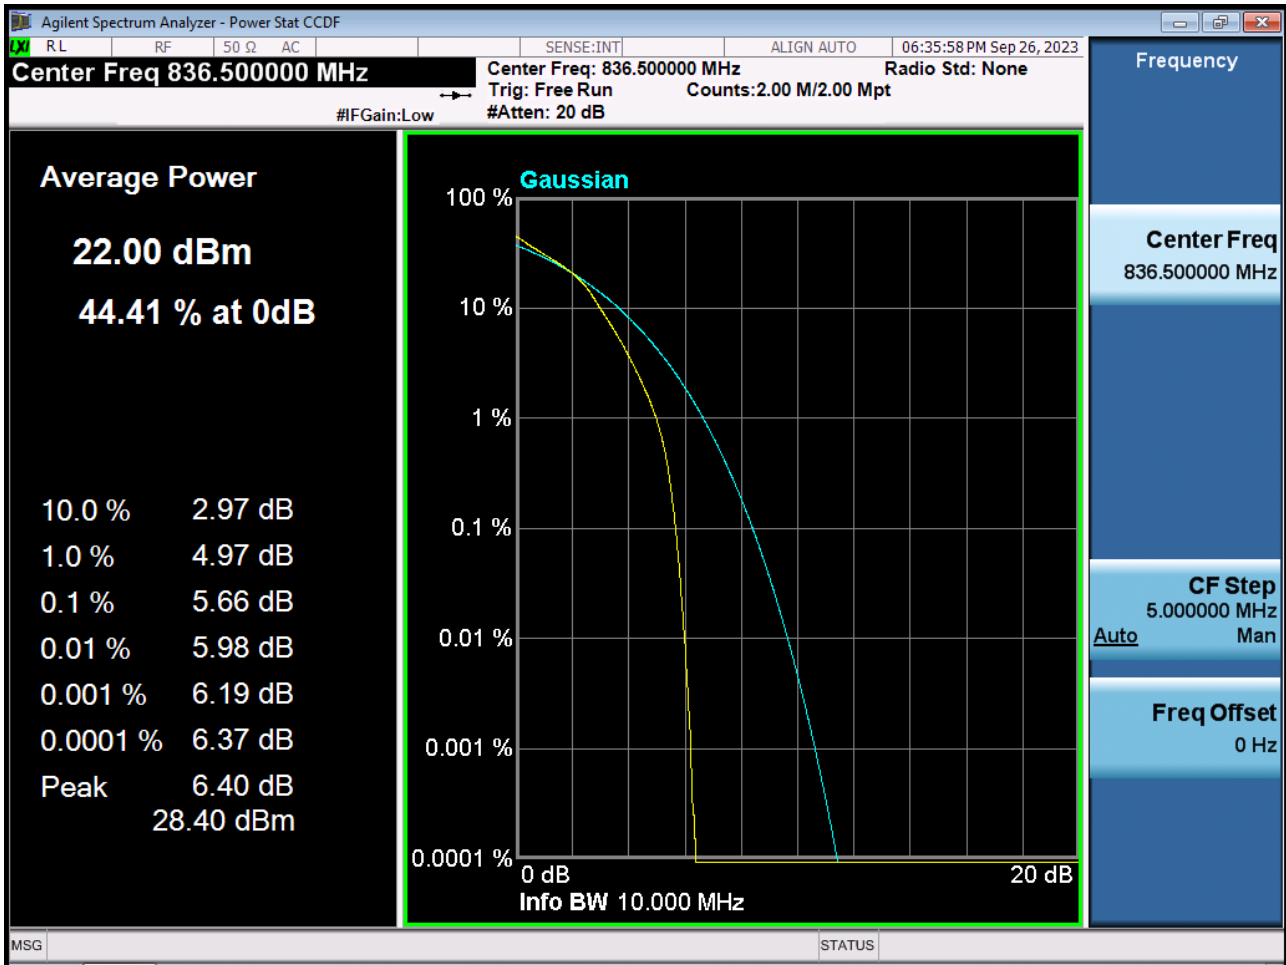


BAND5/26. PAR Plot (10 M BW Ch.26915 64QAM\_RB50\_0)

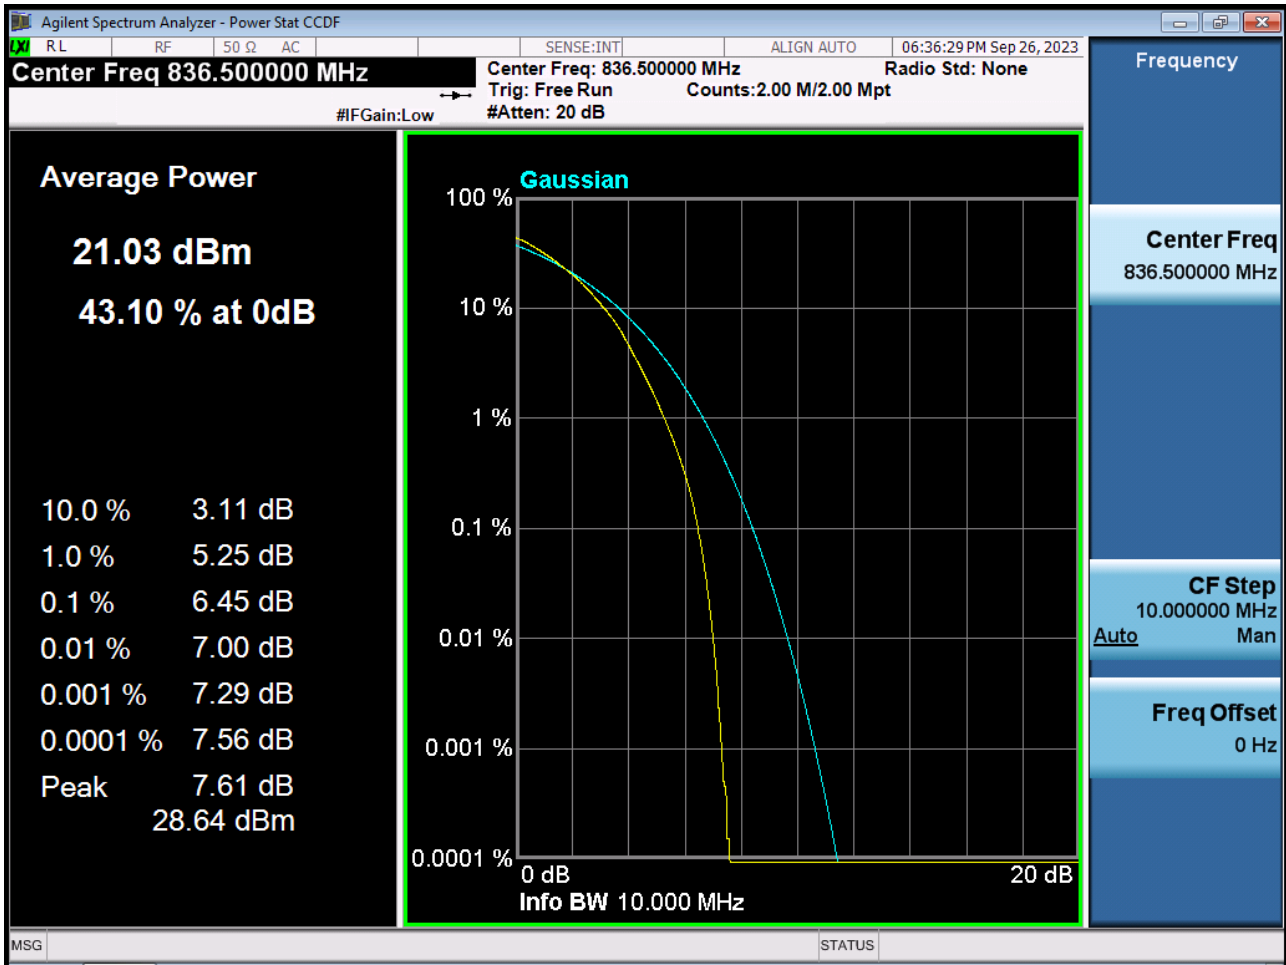


BAND5/26. PAR Plot (10 M BW Ch.26915 256QAM\_RB50\_0)

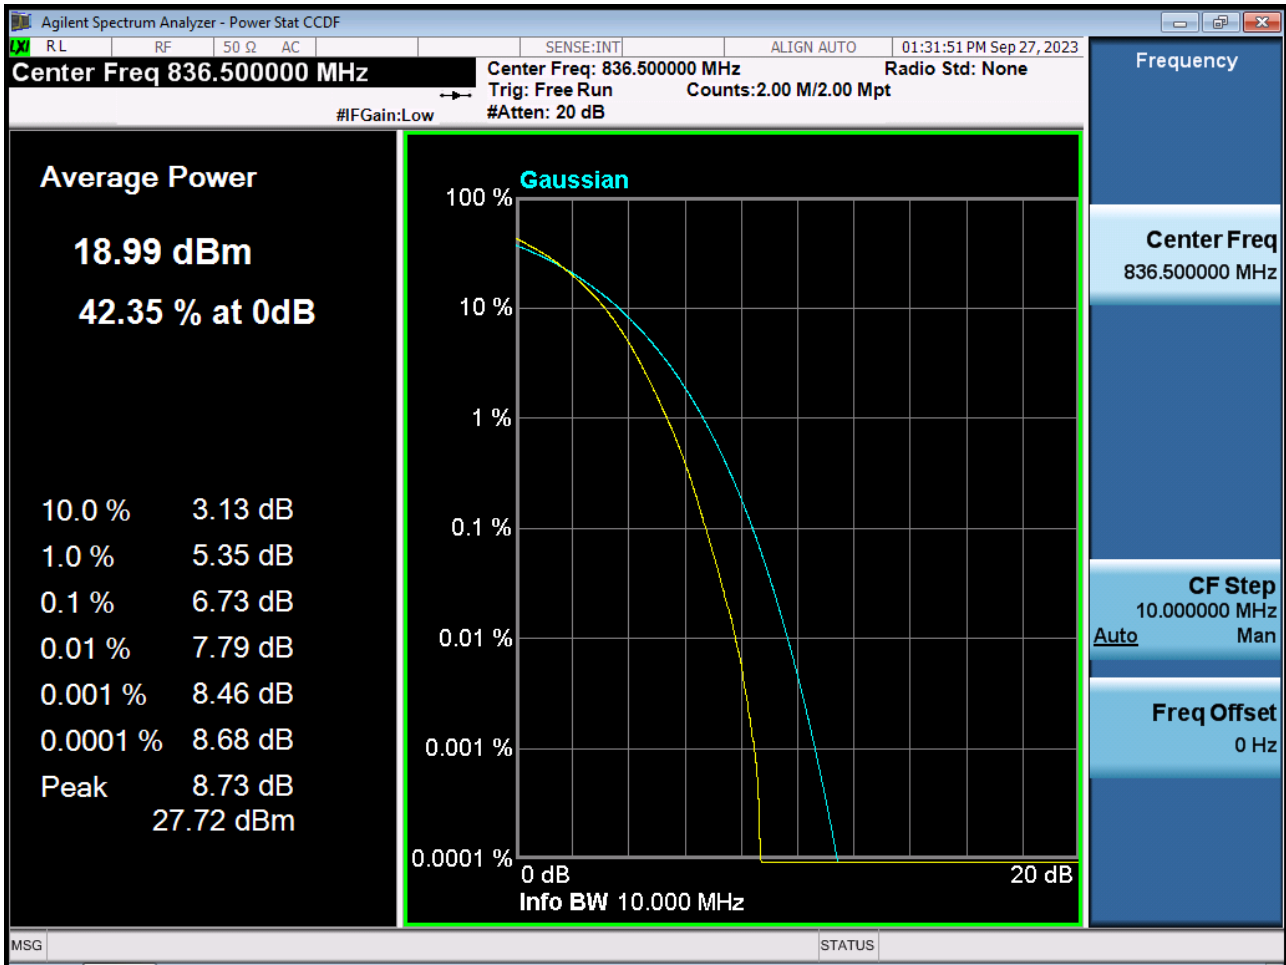


BAND 26. PAR Plot (15 M BW Ch.26915 QPSK RB 75\_0)

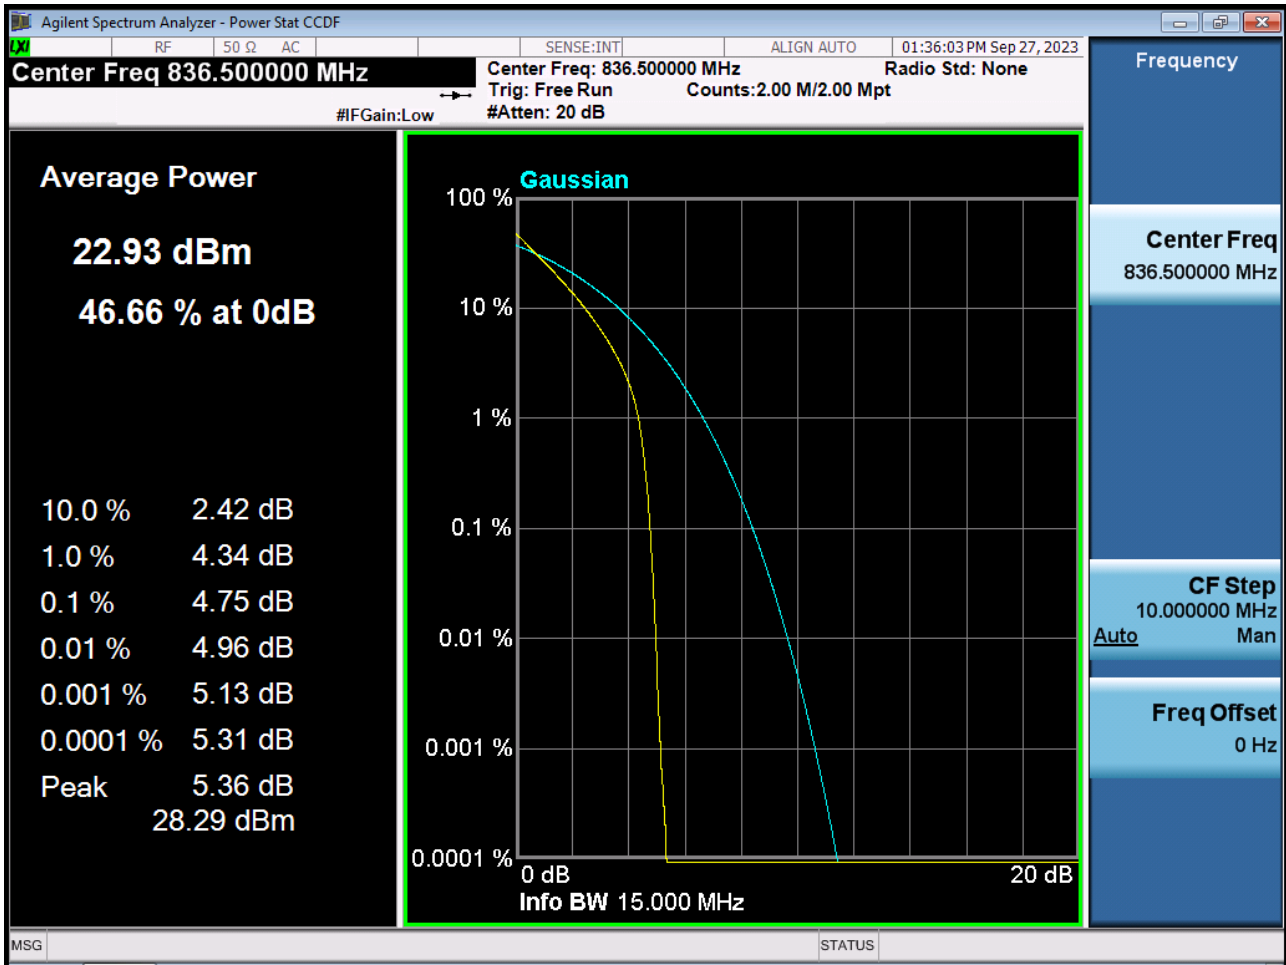


BAND 26. PAR Plot (15 M BW Ch.26915 16QAM RB 75\_0)

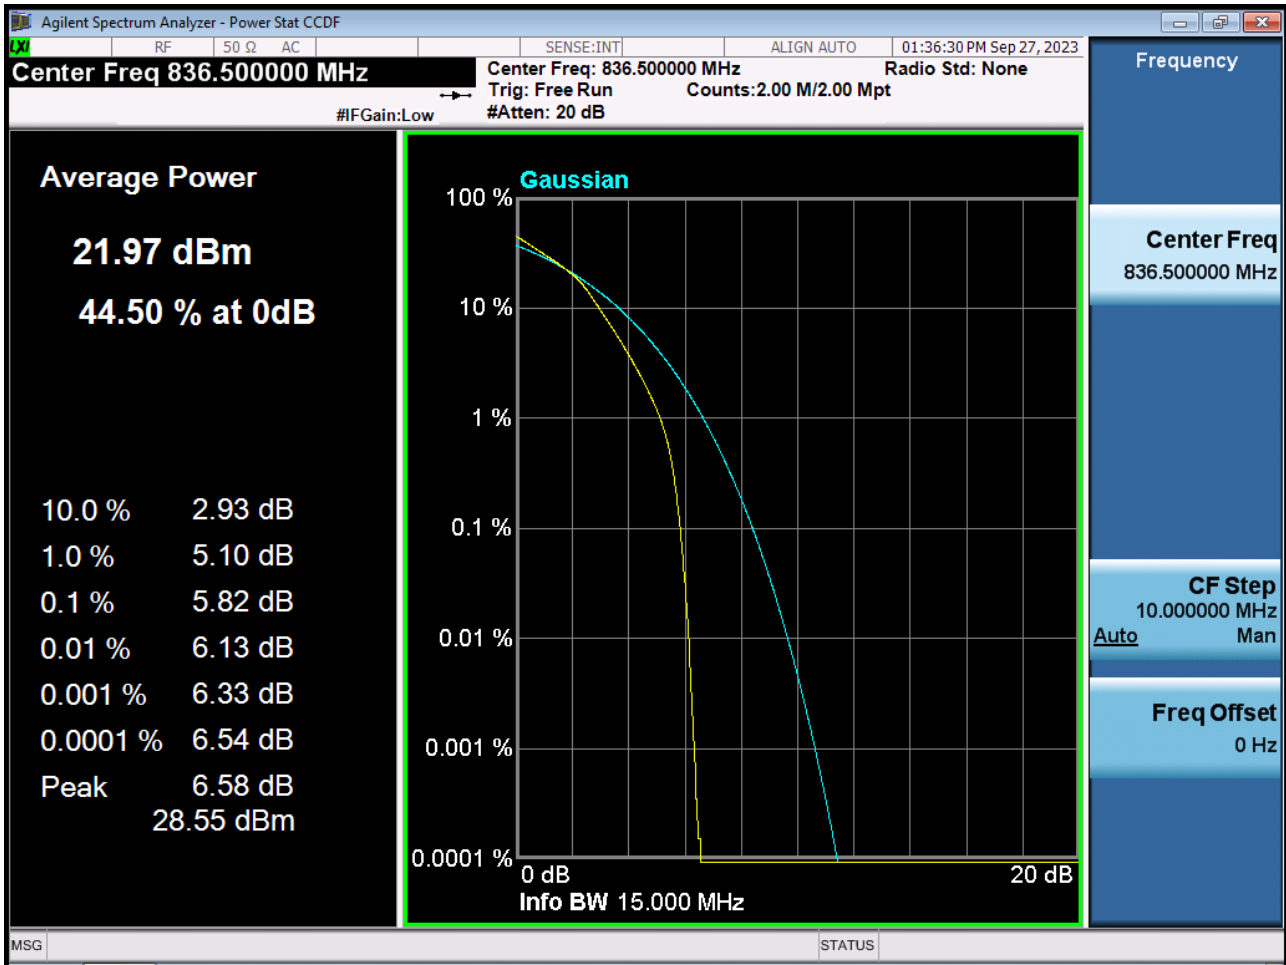

BAND 26. PAR Plot (15 M BW Ch.26915 64QAM RB 75\_0)

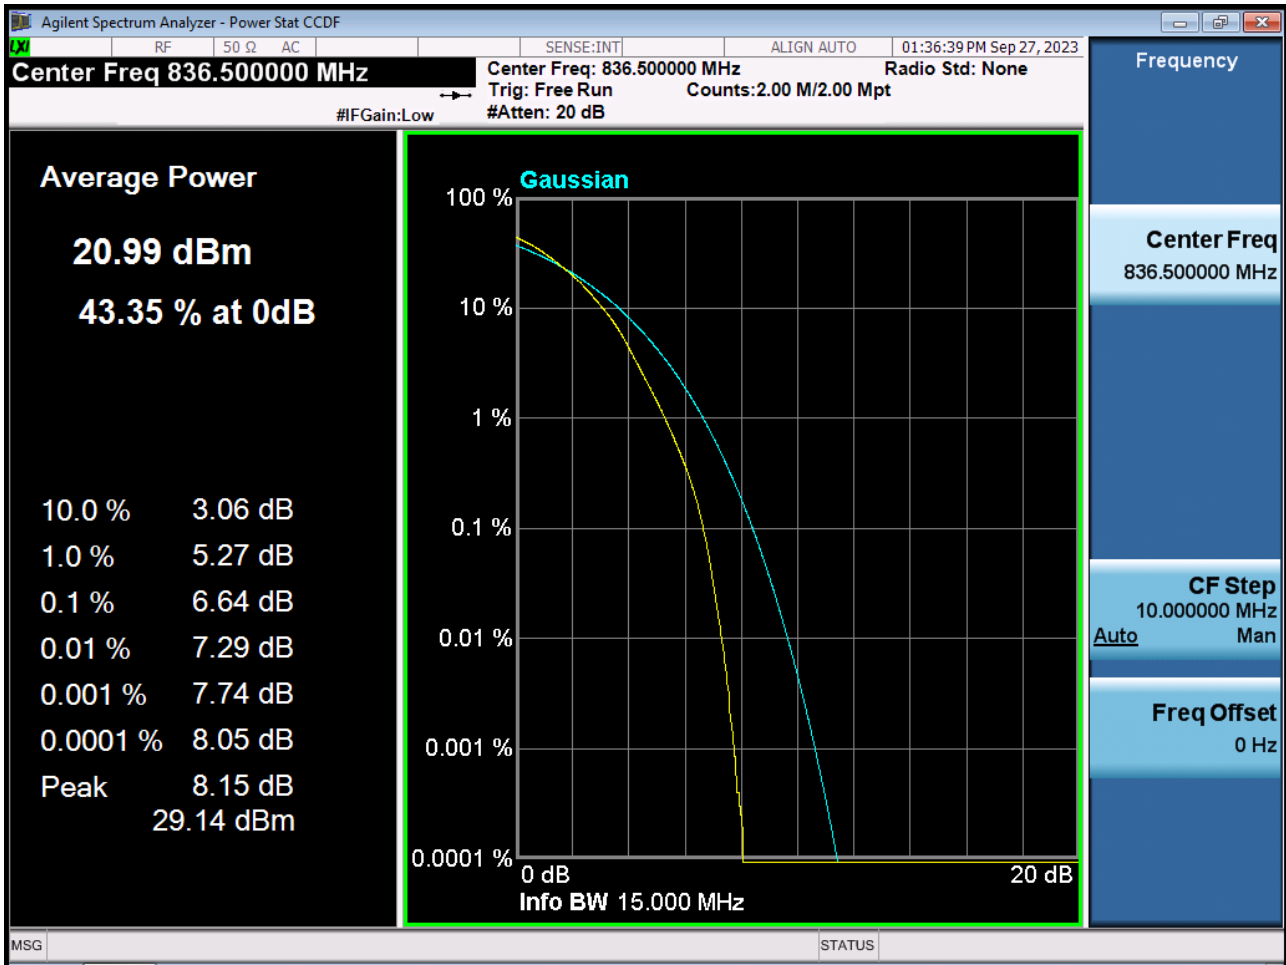


BAND 26. PAR Plot (15 M BW Ch.26915 256QAM RB 75\_0)

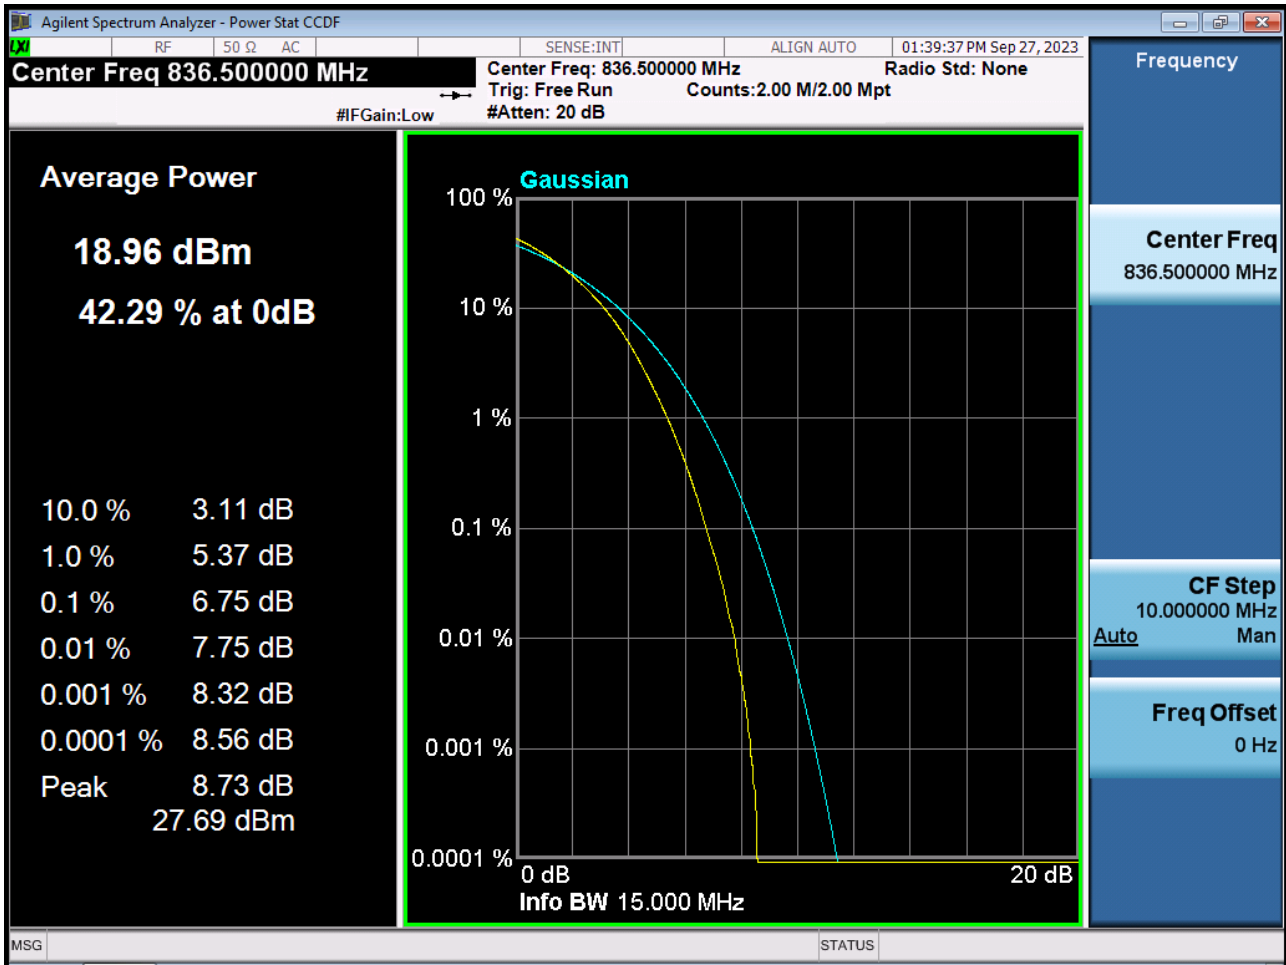




BAND5/26. Lower Band Edge Plot (1.4 M BW Ch.26797 QPSK\_RB1\_Offset 0)

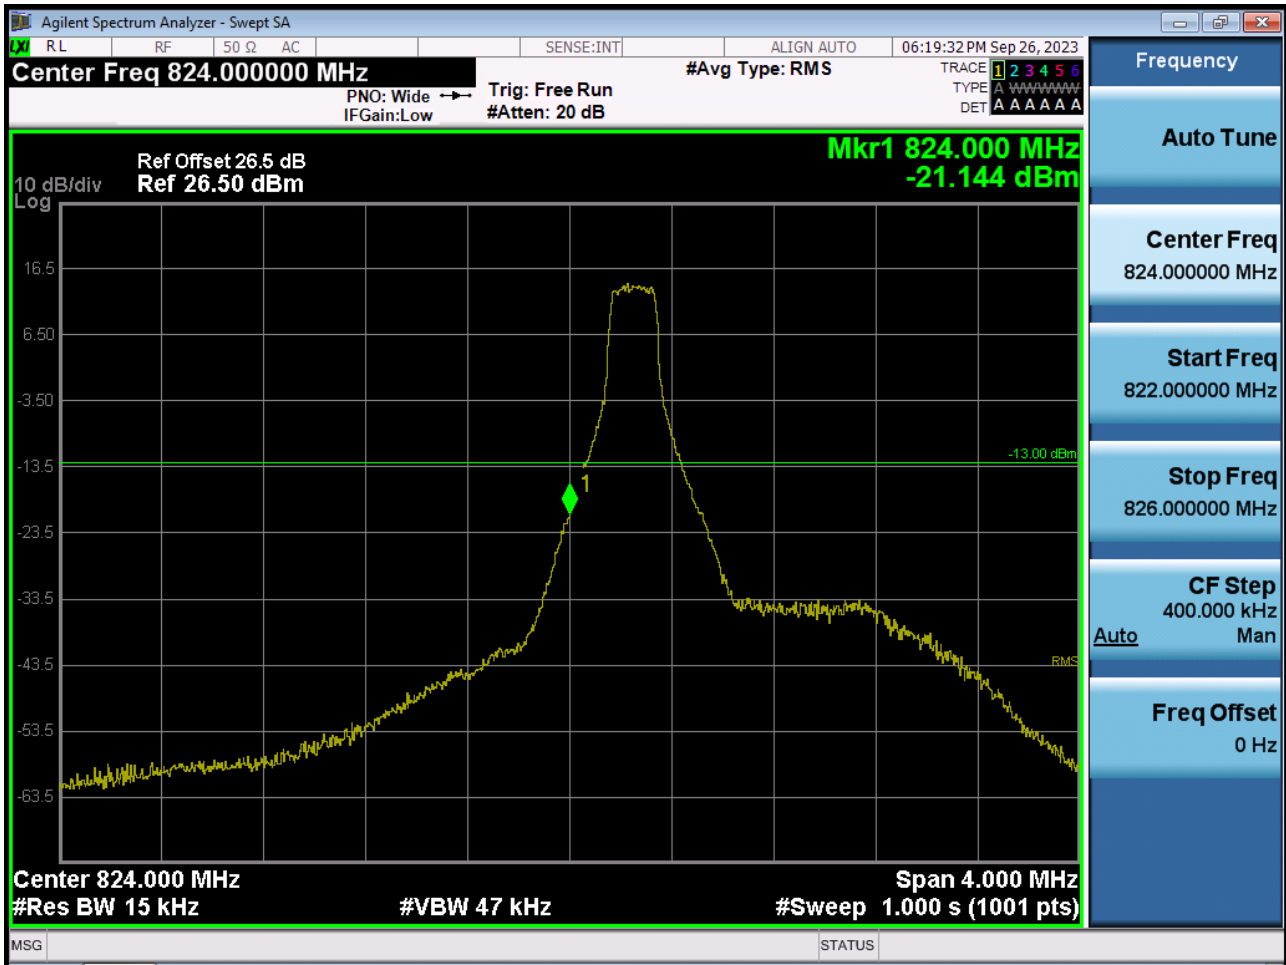


BAND5/26. Lower Band Edge Plot (1.4 M BW Ch.26797 QPSK\_RB6\_Offset 0)

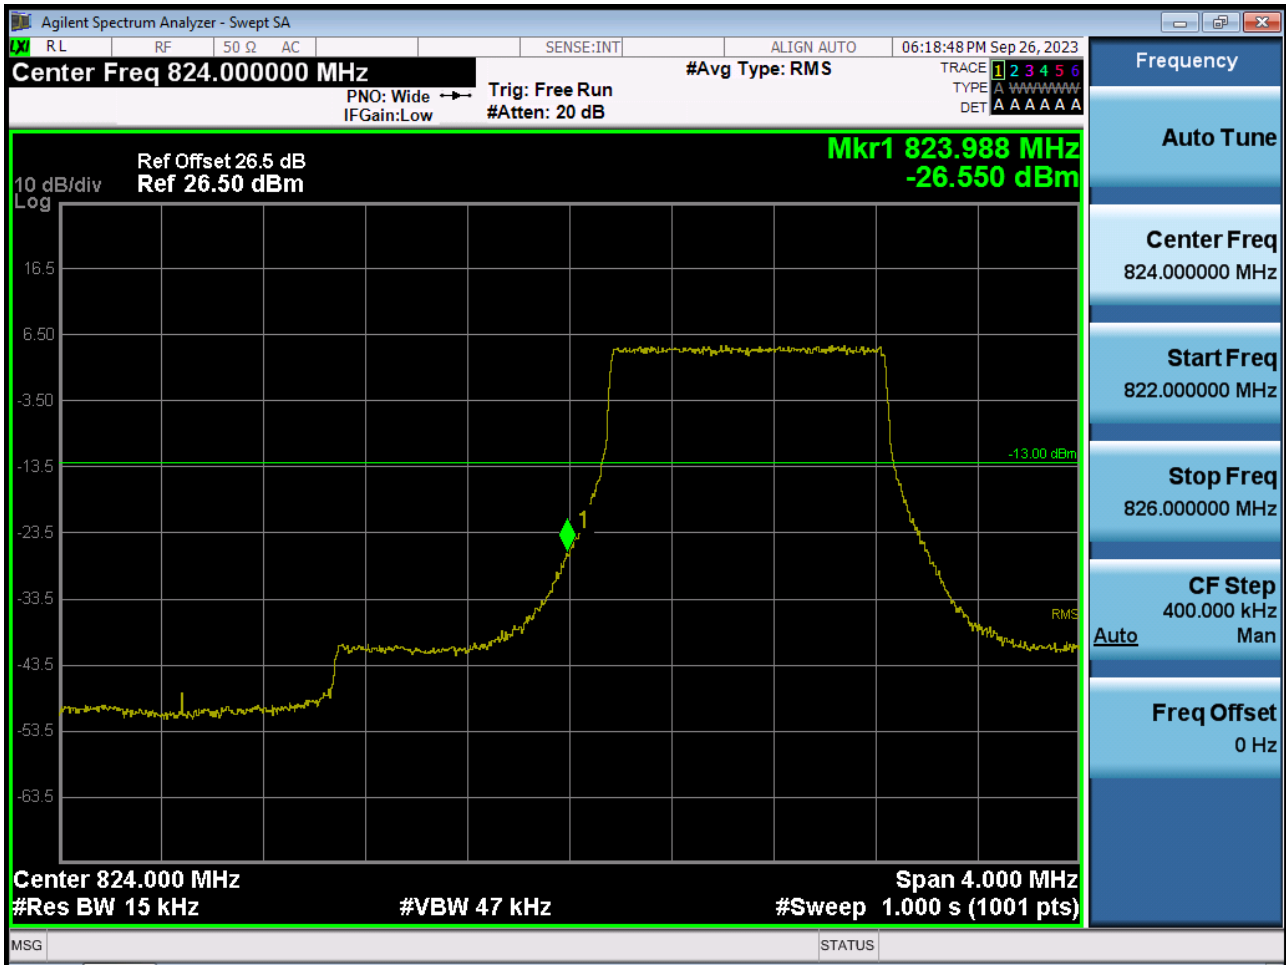

BAND5/26. Lower Extended Band Edge Plot (1.4 M BW Ch.26797 QPSK\_RB6\_0)



BAND5/26. Lower Band Edge Plot (3 M BW Ch.26805 QPSK\_RB1\_Offset 0)

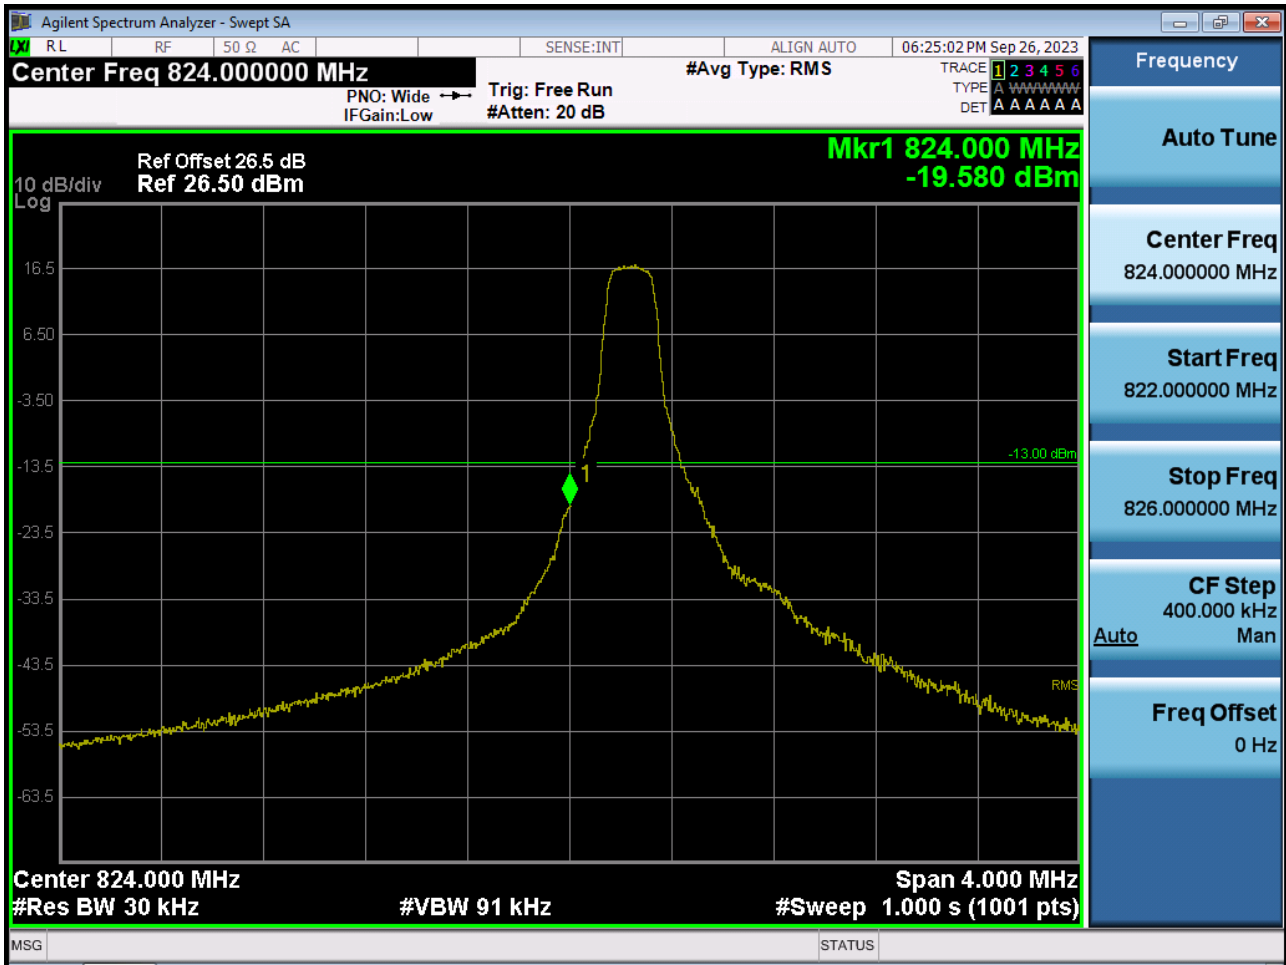


BAND5/26. Lower Band Edge Plot (3 M BW Ch.26805 QPSK\_RB15\_Offset 0)



BAND5/26. Lower Extended Band Edge Plot (3 M BW Ch.26805 QPSK\_RB15\_0)



BAND5/26. Lower Band Edge Plot (5 M BW Ch.26815 QPSK\_RB1\_Offset 0)

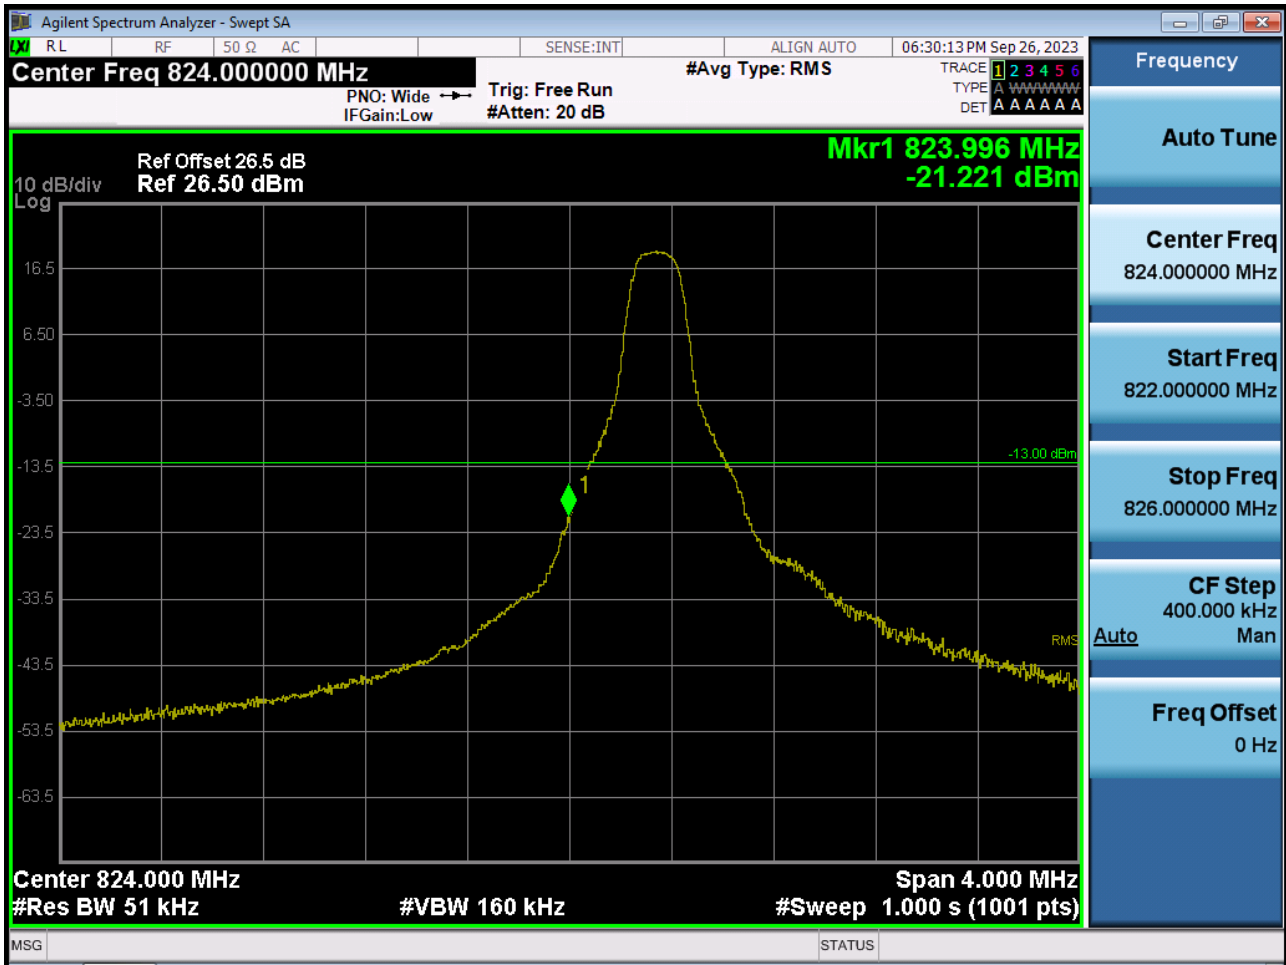

BAND5/26. Lower Band Edge Plot (5 M BW Ch.26815 QPSK\_RB25\_Offset 0)






BAND5/26. Lower Extended Band Edge Plot (5 M BW Ch.26815 QPSK\_RB25\_0)



BAND5/26. Lower Band Edge Plot (10 M BW Ch.26840 QPSK\_RB1\_Offset 0)

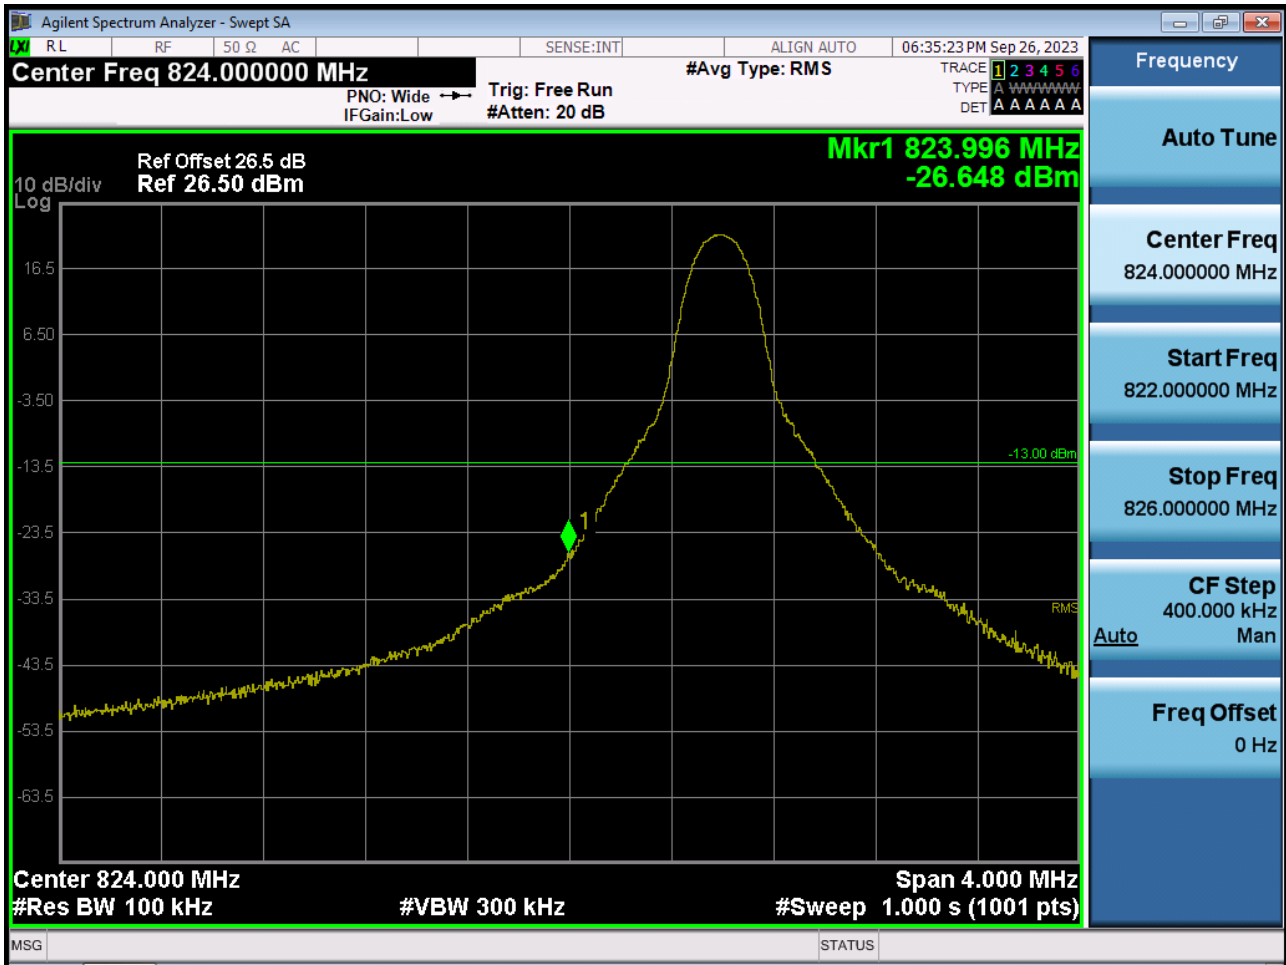


BAND5/26. Lower Band Edge Plot (10 M BW Ch.26840 QPSK\_RB50\_Offset 0)




BAND5/26. Lower Extended Band Edge Plot (10 M BW Ch.26840 QPSK\_RB50\_0)




BAND 26. Lower Band Edge Plot (15 M BW Ch.26865 QPSK\_RB1\_Offset 0)

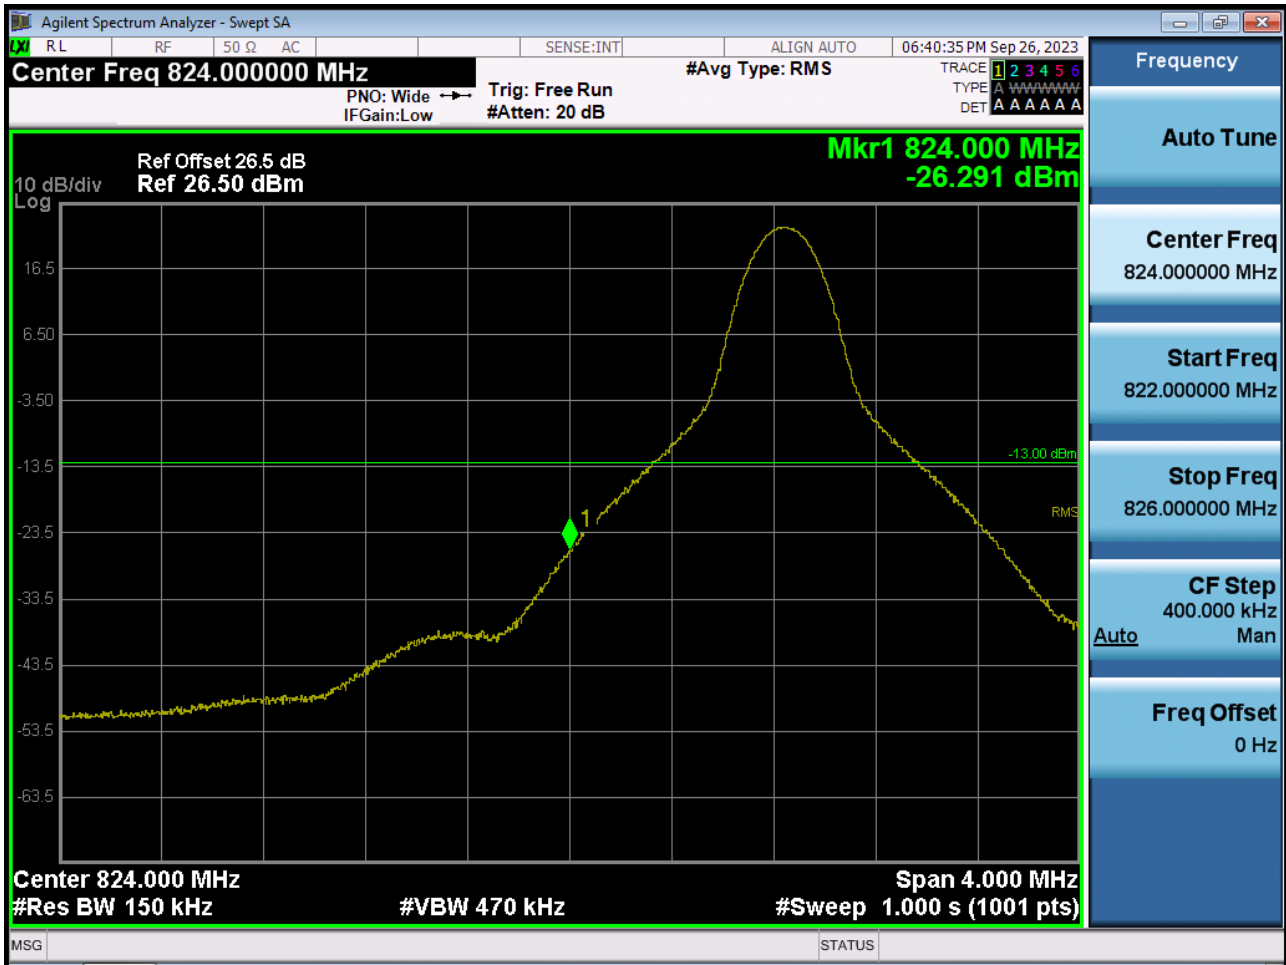


BAND 26. Lower Band Edge Plot (15 M BW Ch.26865 QPSK\_RB75\_Offset 0)

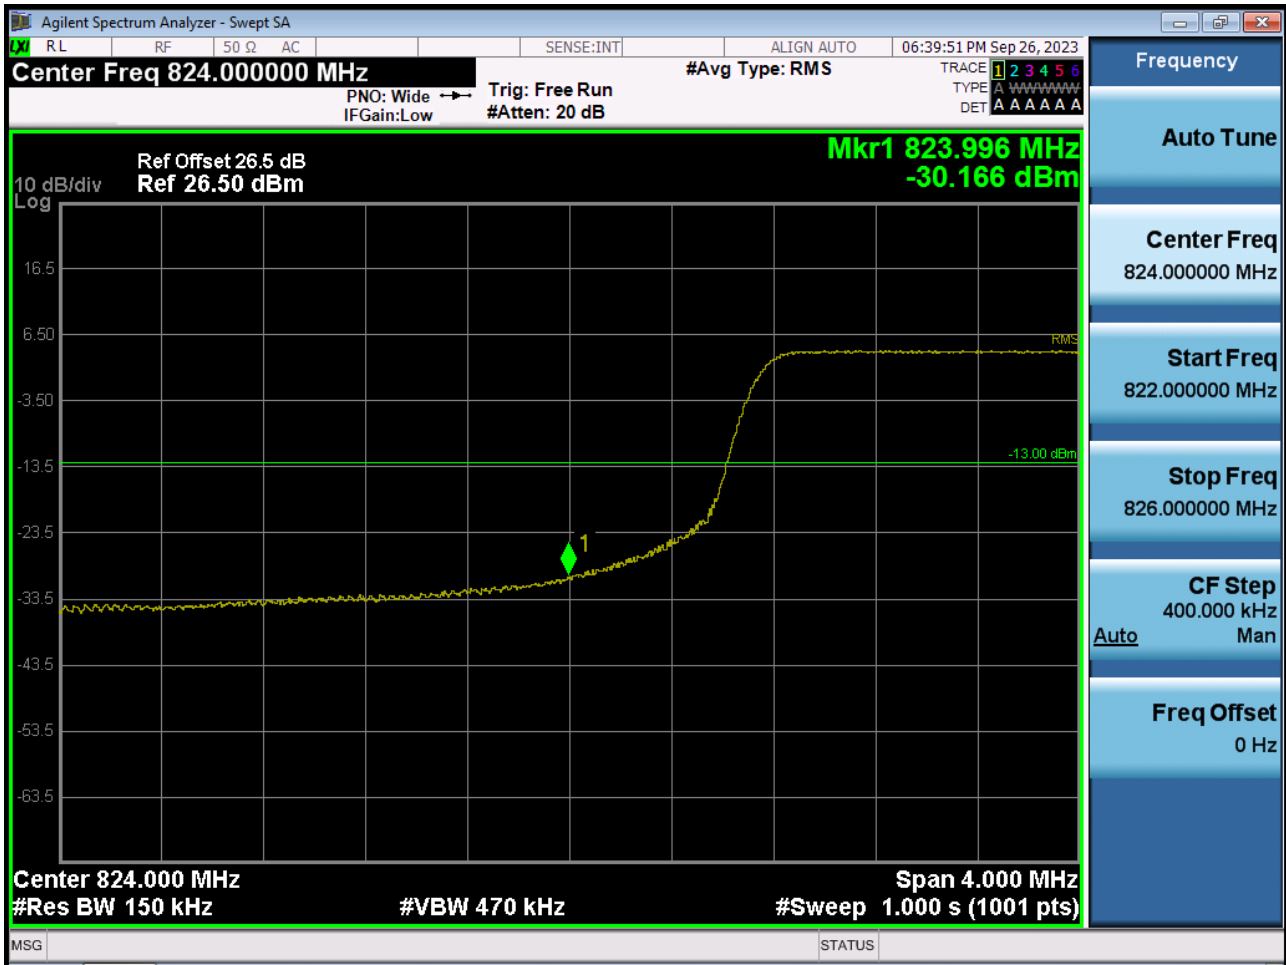

BAND 26. Lower Extended Band Edge Plot (15 M BW Ch.26865 QPSK\_RB75\_0)

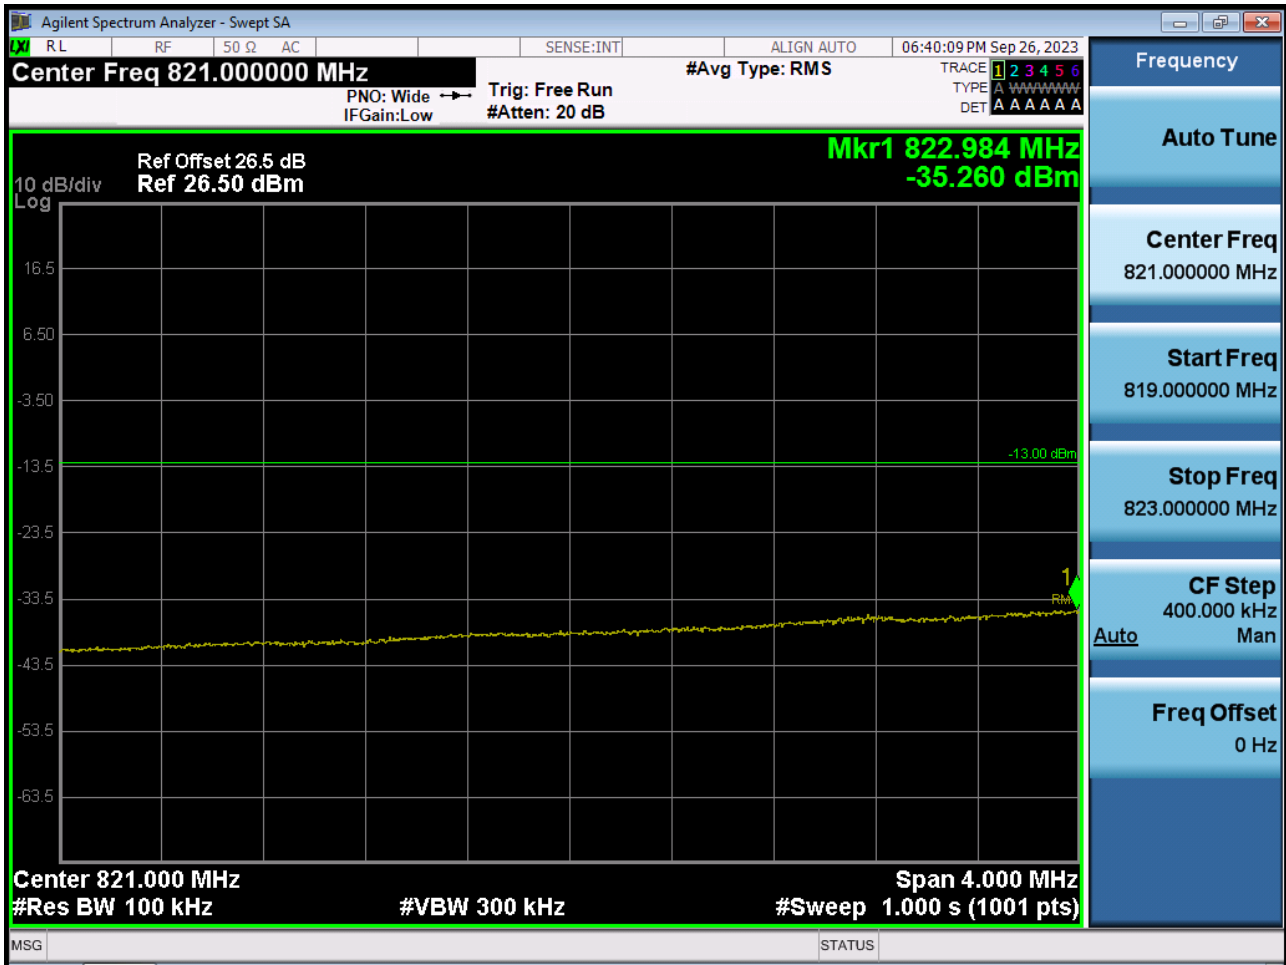

BAND5/26. Upper Band Edge Plot (1.4 M BW Ch.27033 QPSK\_RB1\_Offset 5)

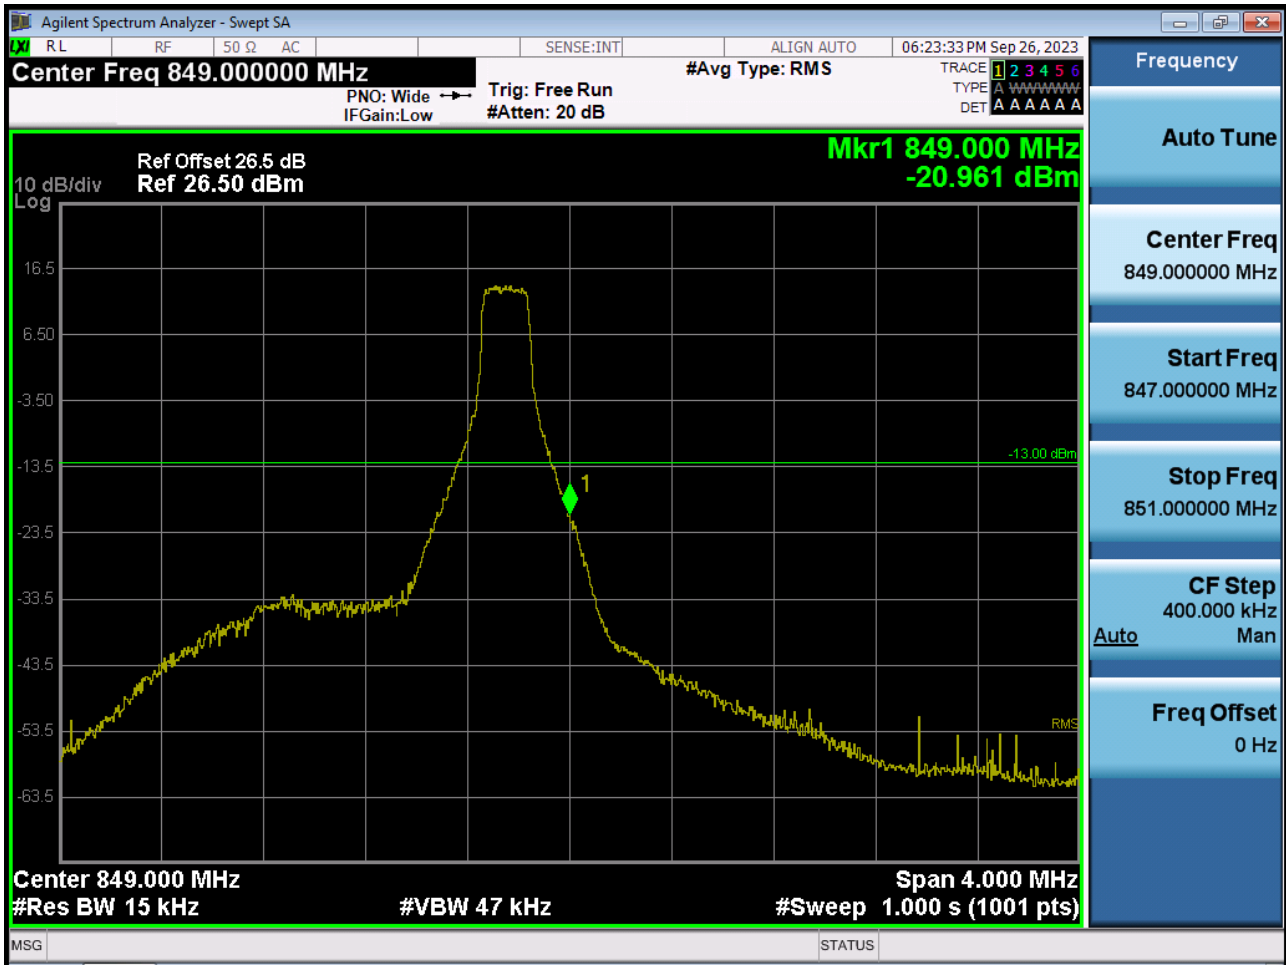




BAND5/26. Upper Band Edge Plot (1.4 M BW Ch.27033 QPSK\_RB6\_Offset 0)




BAND5/26. Upper Extended Band Edge Plot (1.4 M BW Ch.27033 QPSK\_RB6\_0)



BAND5/26. Upper Band Edge Plot (3 M BW Ch.27025 QPSK\_RB1\_Offset 14)

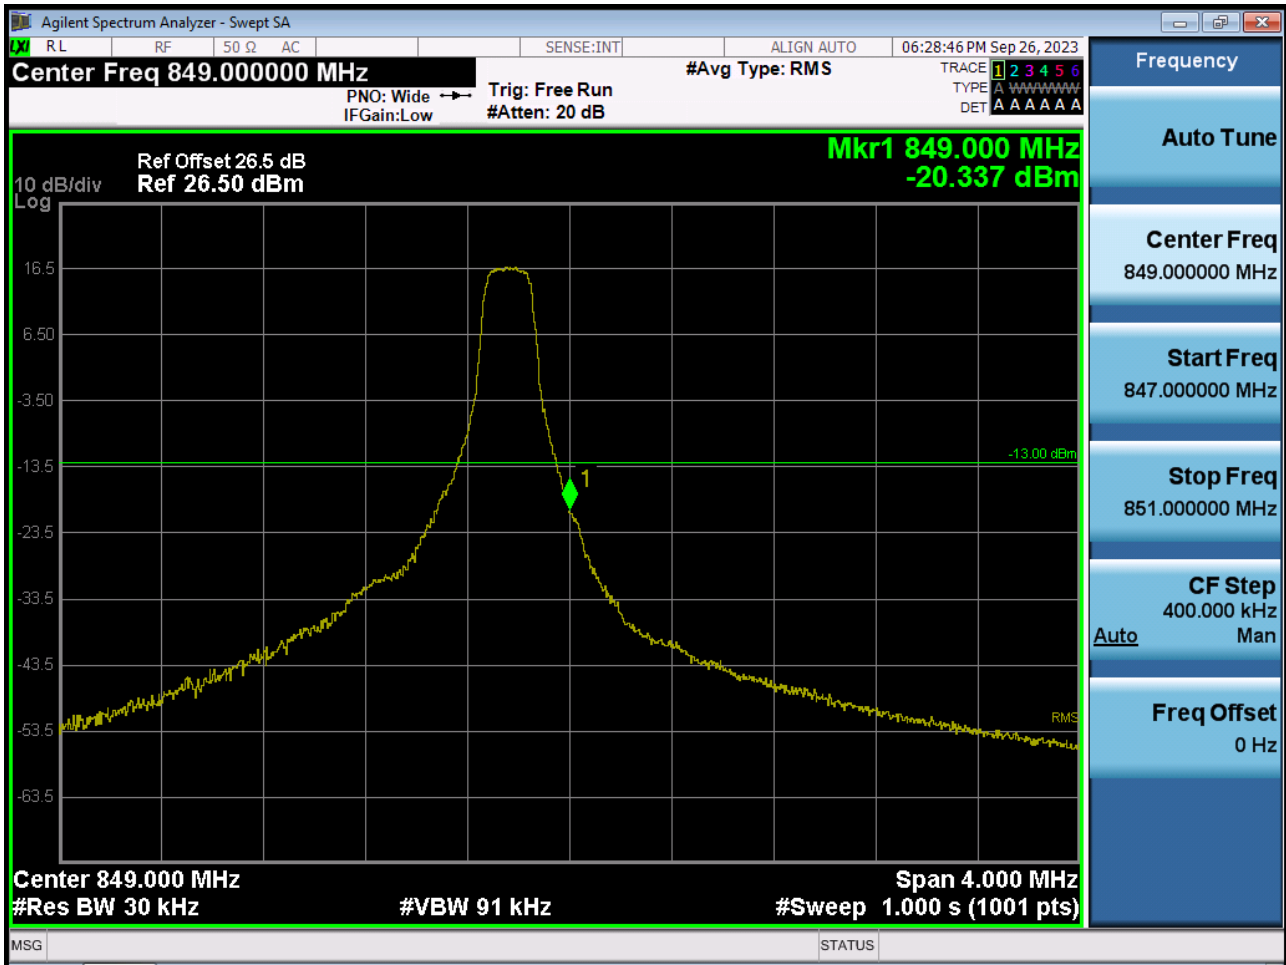


BAND5/26. Upper Band Edge Plot (3 M BW Ch.27025 QPSK\_RB15\_Offset 0)

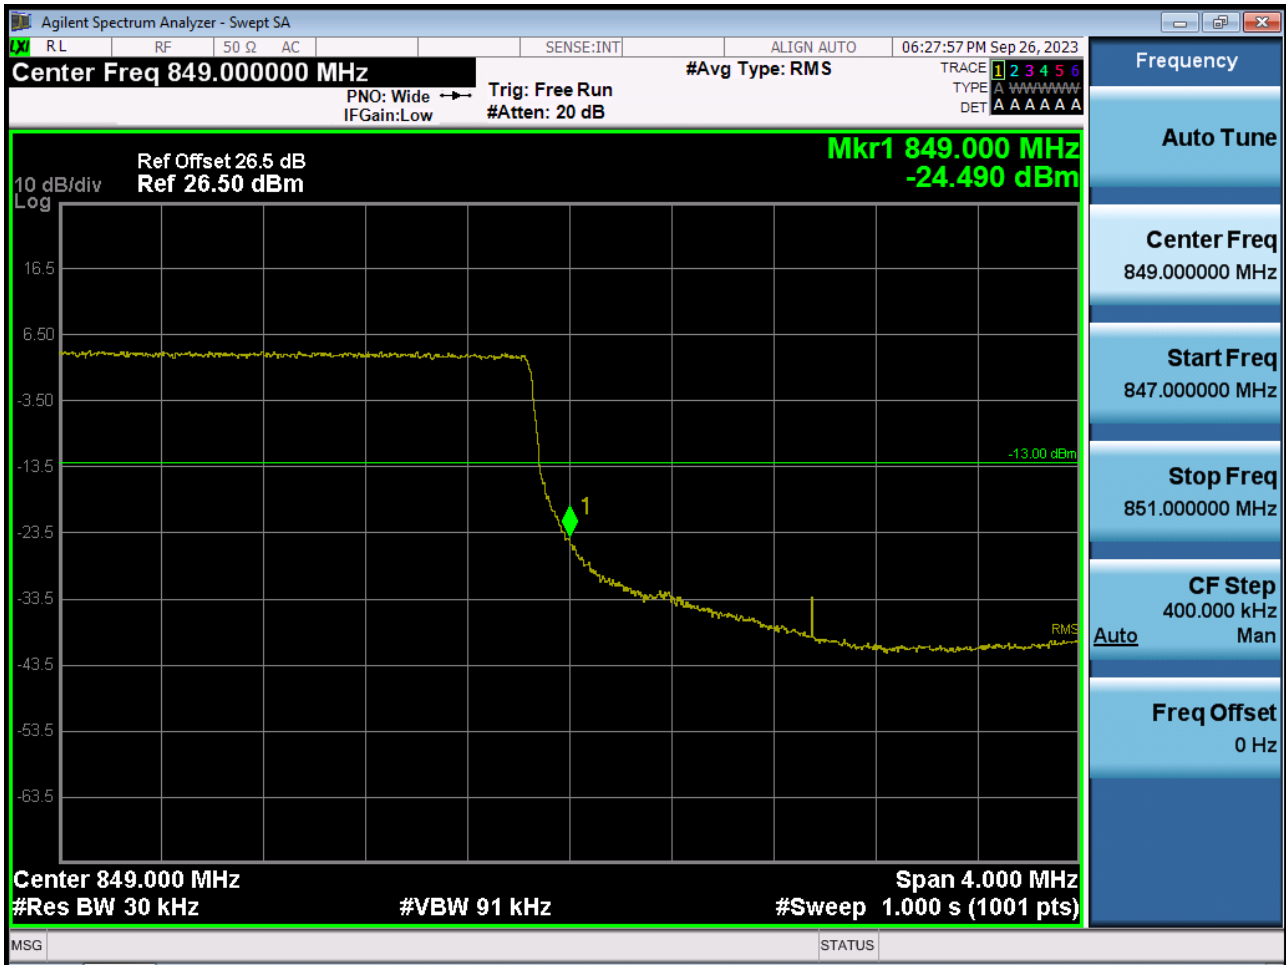

BAND5/26. Upper Extended Band Edge Plot (3 M BW Ch.27025 QPSK\_RB15\_0)



BAND5/26. Upper Band Edge Plot (5 M BW Ch.27015 QPSK\_RB1\_Offset 24)

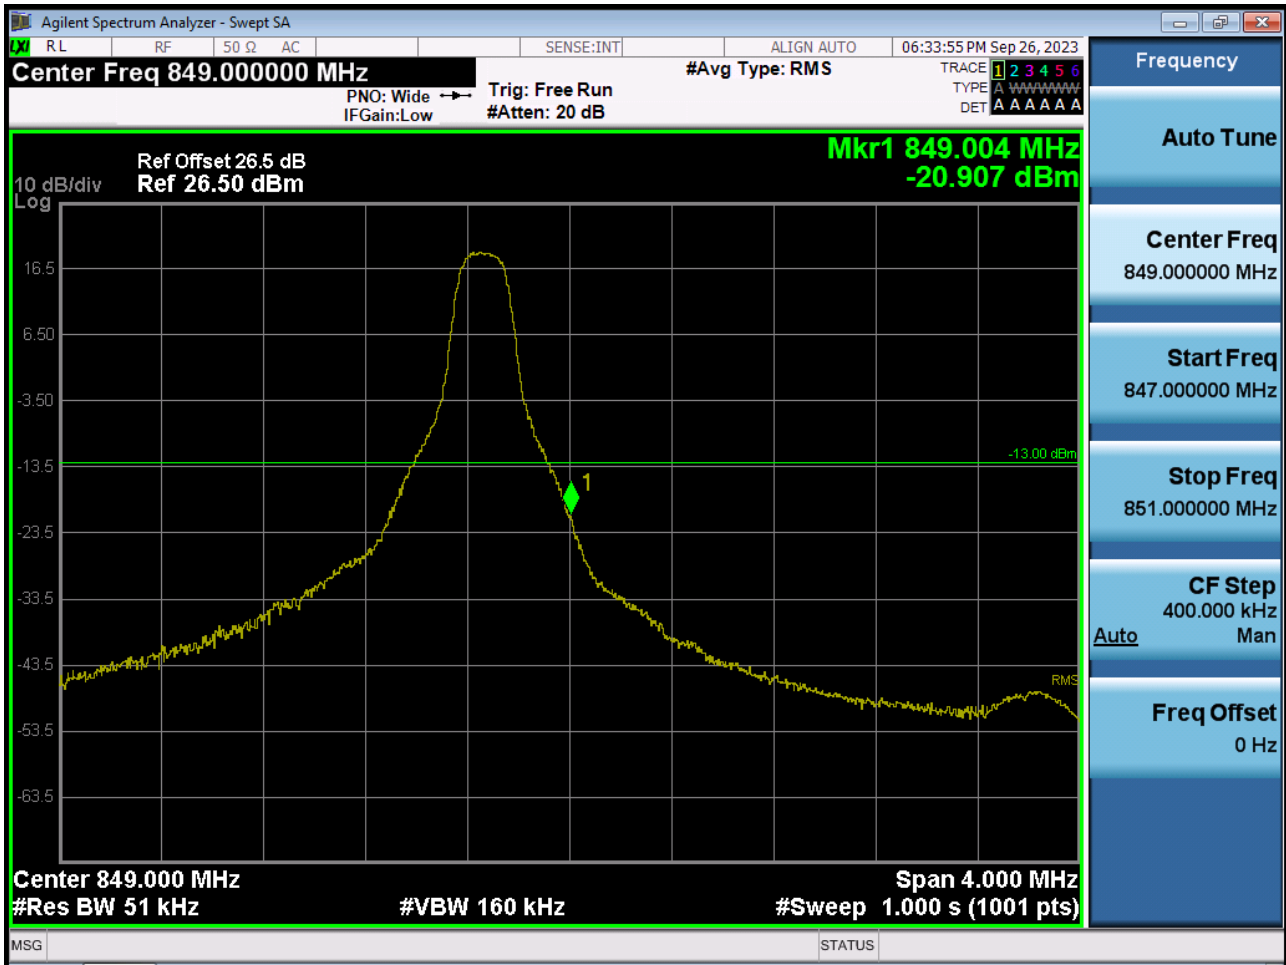

BAND5/26. Upper Band Edge Plot (5 M BW Ch.27015 QPSK\_RB25\_Offset 0)



BAND5/26. Upper Extended Band Edge Plot (5 M BW Ch.27015 QPSK\_RB25\_0)







BAND5/26. Upper Band Edge Plot (10 M BW Ch.26990 QPSK\_RB1\_Offset 49)



BAND5/26. Upper Band Edge Plot (10 M BW Ch.26990 QPSK\_RB50\_Offset 0)

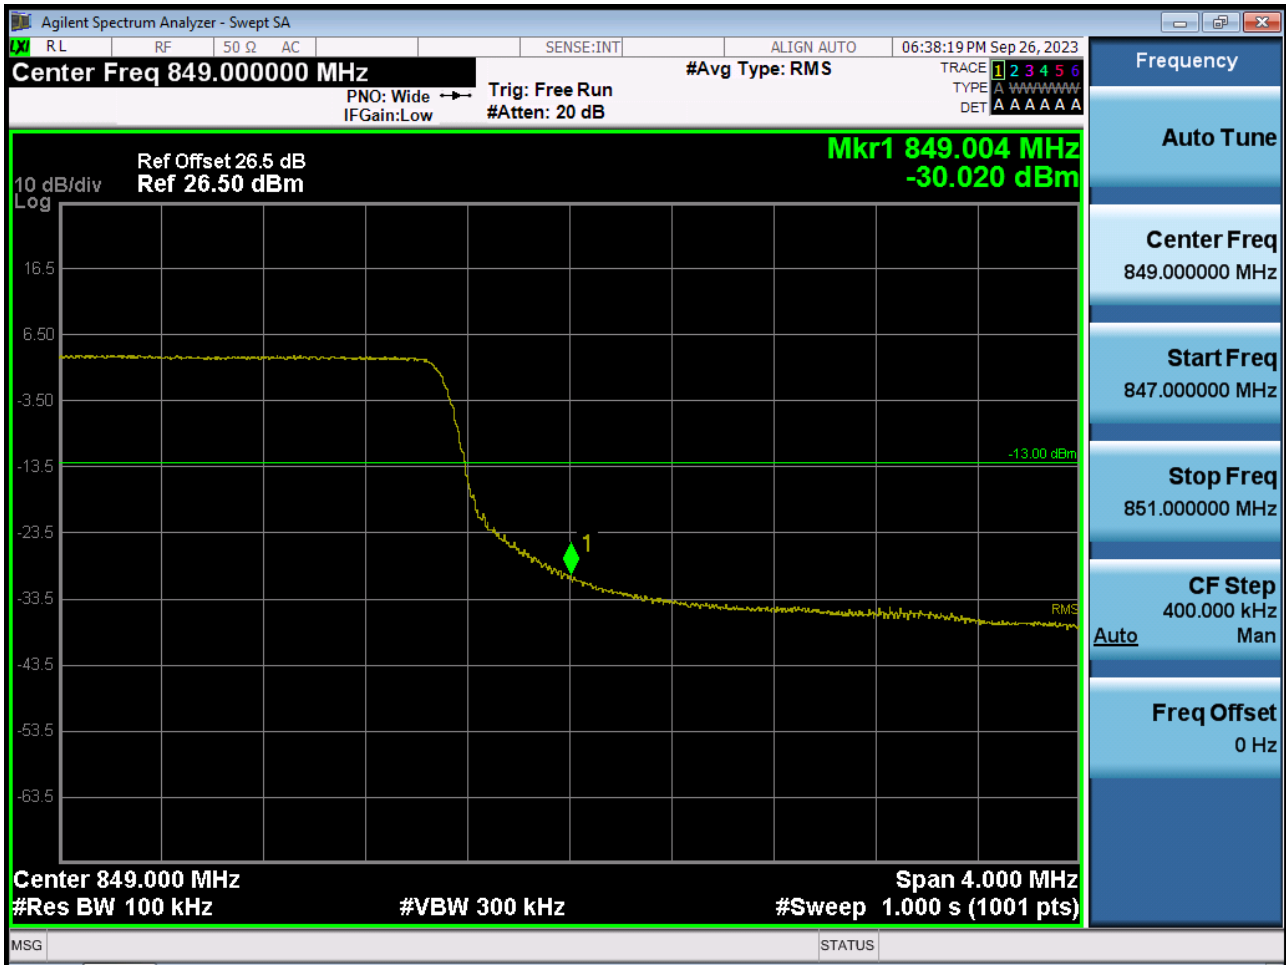

BAND5/26. Upper Extended Band Edge Plot (10 M BW Ch.26990 QPSK\_RB50\_0)

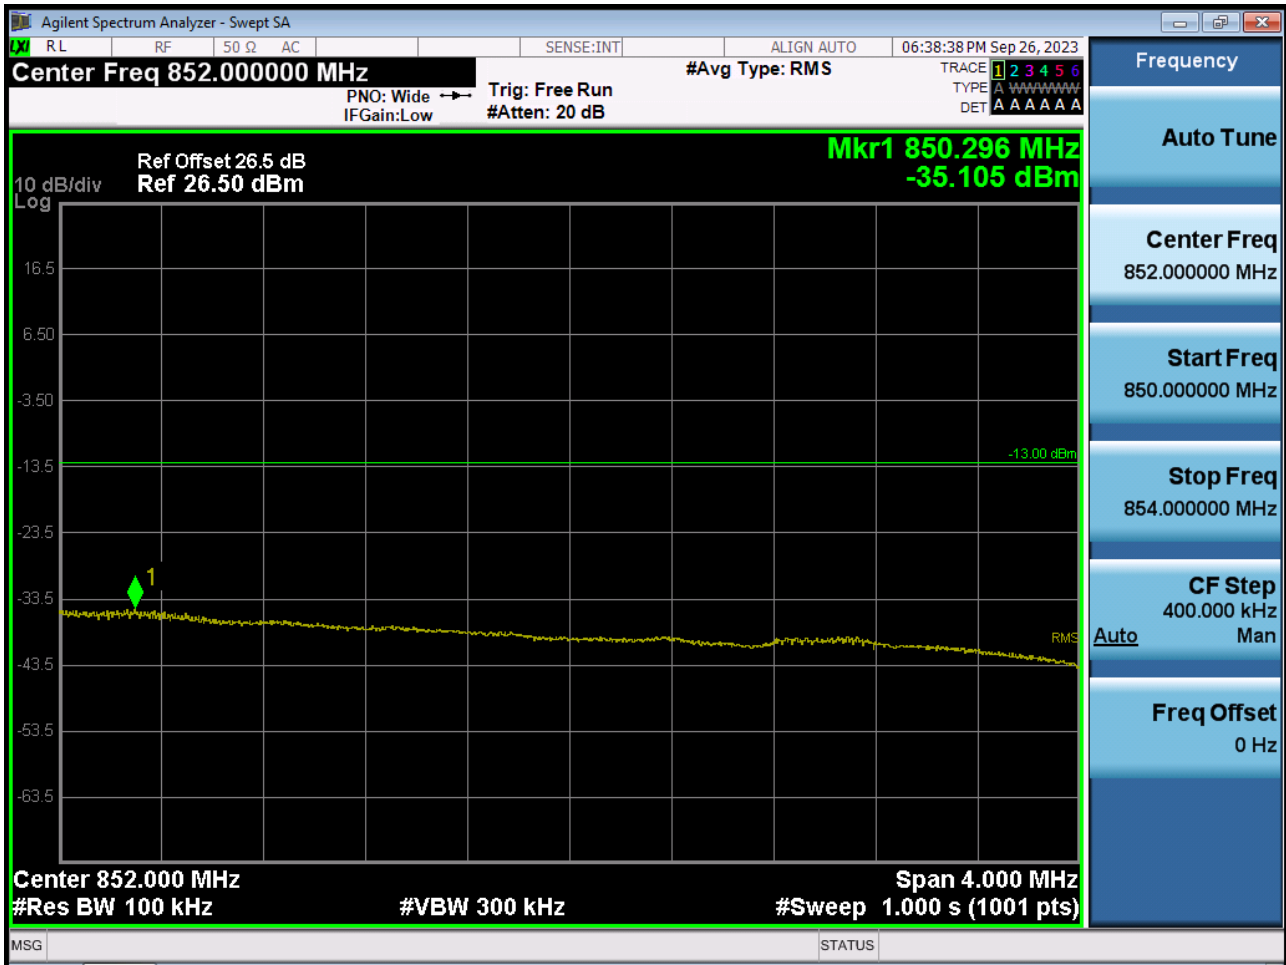


BAND 26. Upper Band Edge Plot (15 M BW Ch.26965 QPSK\_RB1\_Offset 74)




BAND 26. Upper Band Edge Plot (15 M BW Ch.26965 QPSK\_RB75\_Offset 0)




BAND 26. Upper Extended Band Edge Plot (15 M BW Ch.26965 QPSK\_RB75\_0)

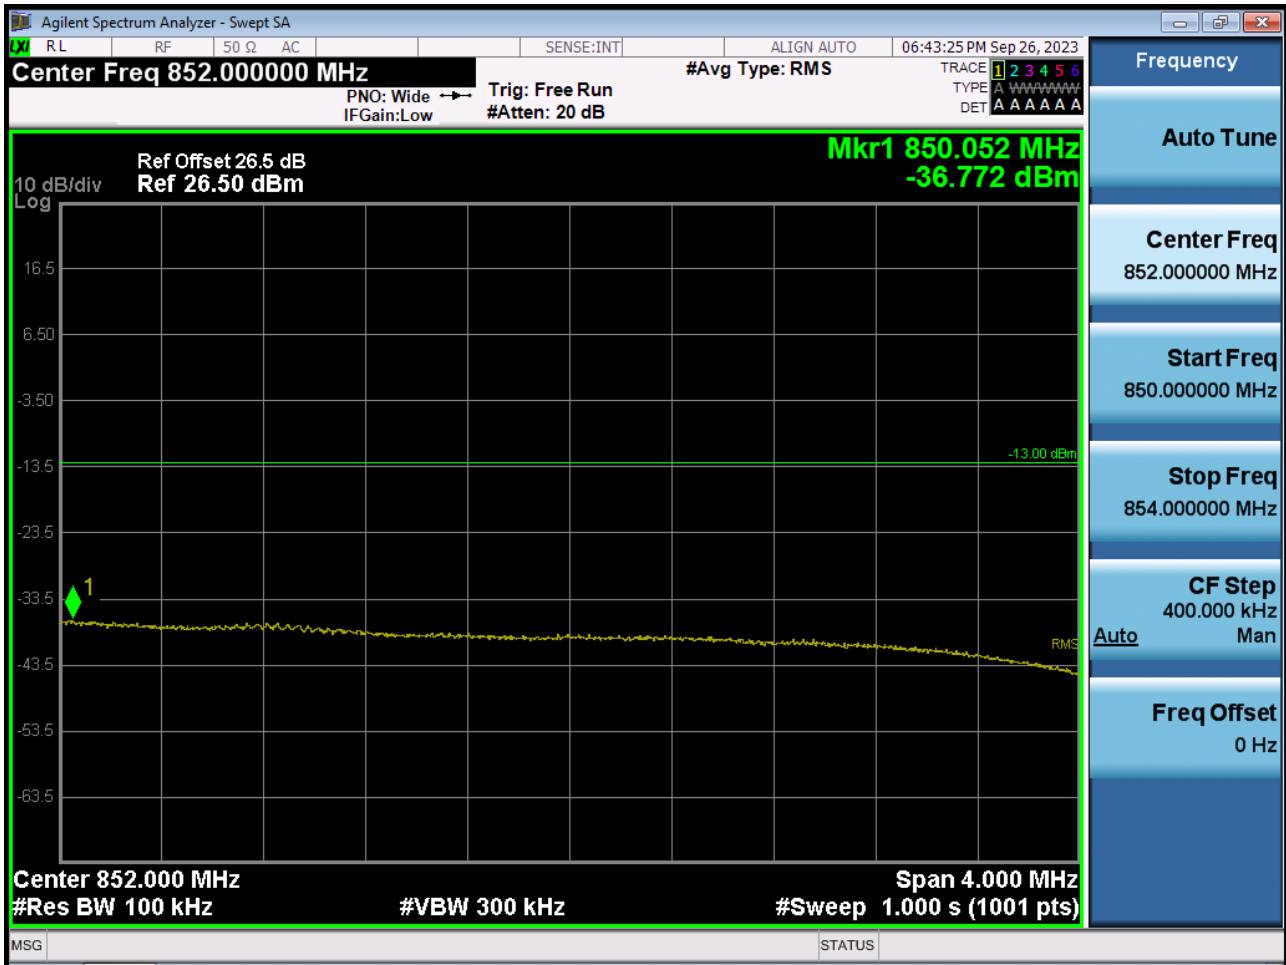

BAND5/26. Conducted Spurious Plot (26797ch\_1.4 MHz\_QPSK\_RB 1\_0)

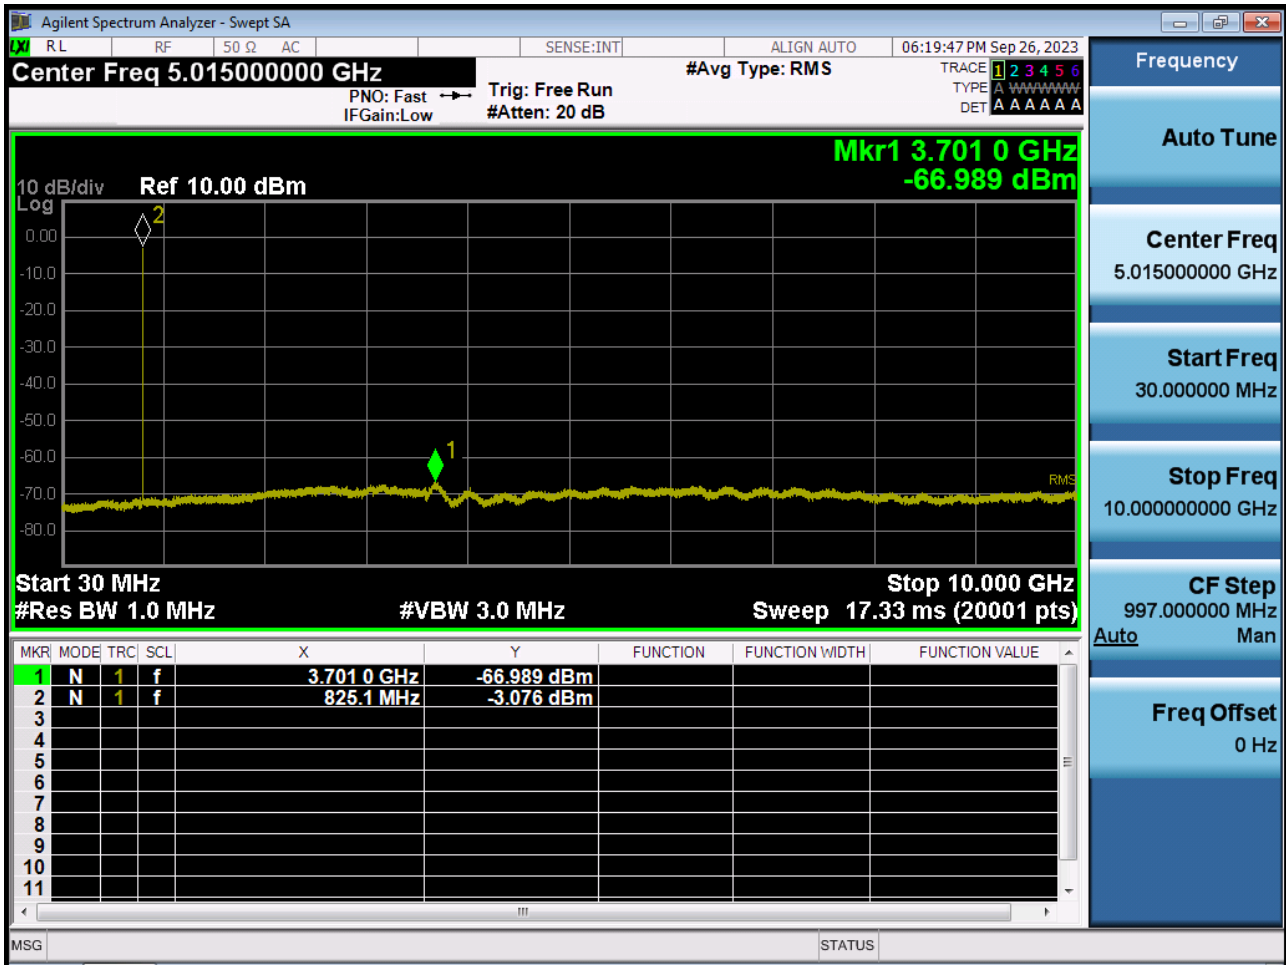


BAND5/26. Conducted Spurious Plot (26915ch\_1.4 MHz\_QPSK\_RB 1\_0)

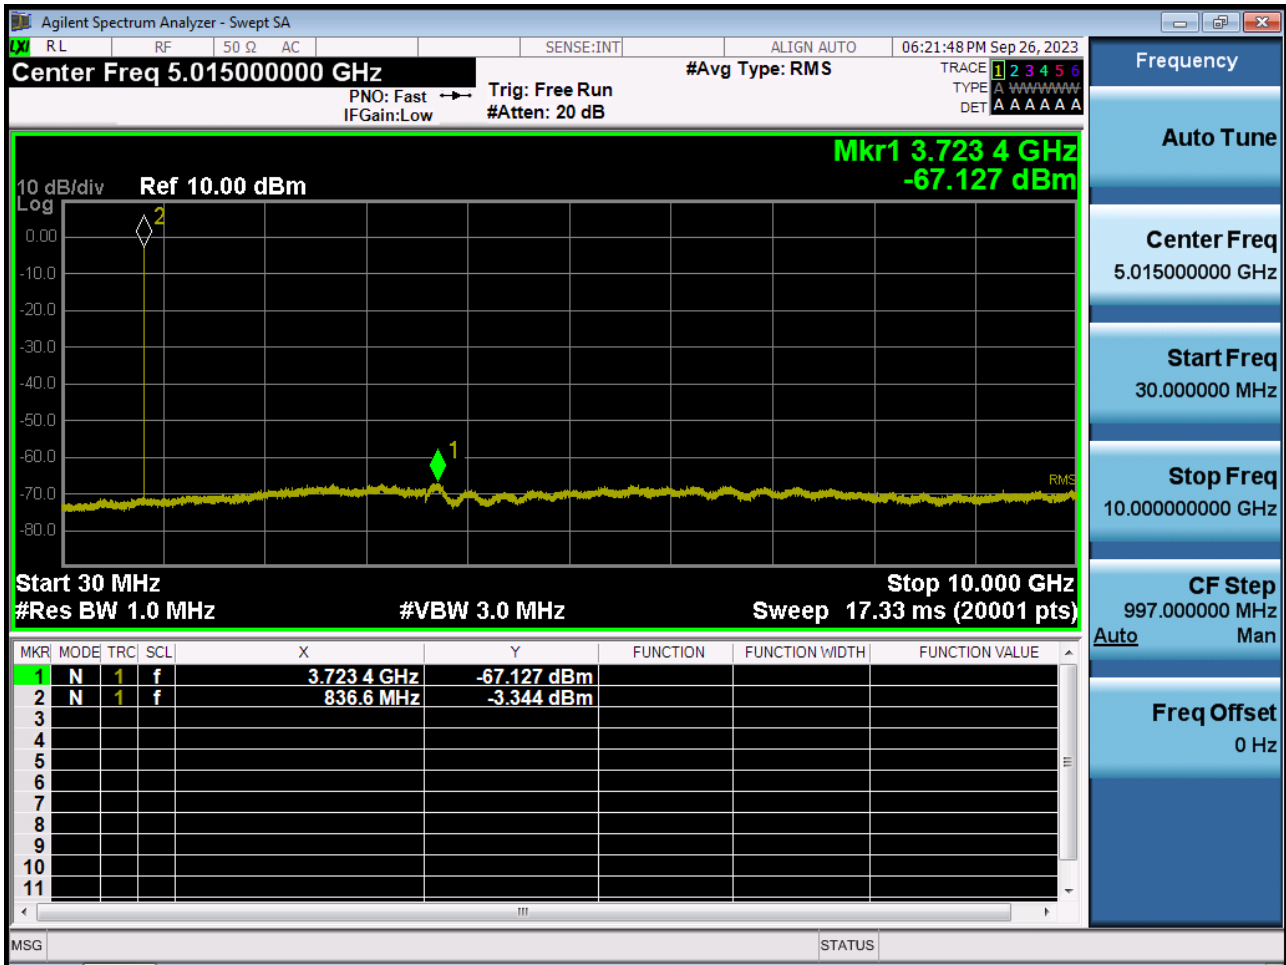





BAND5/26. Conducted Spurious Plot (27033ch\_1.4 MHz\_QPSK\_RB 1\_0)

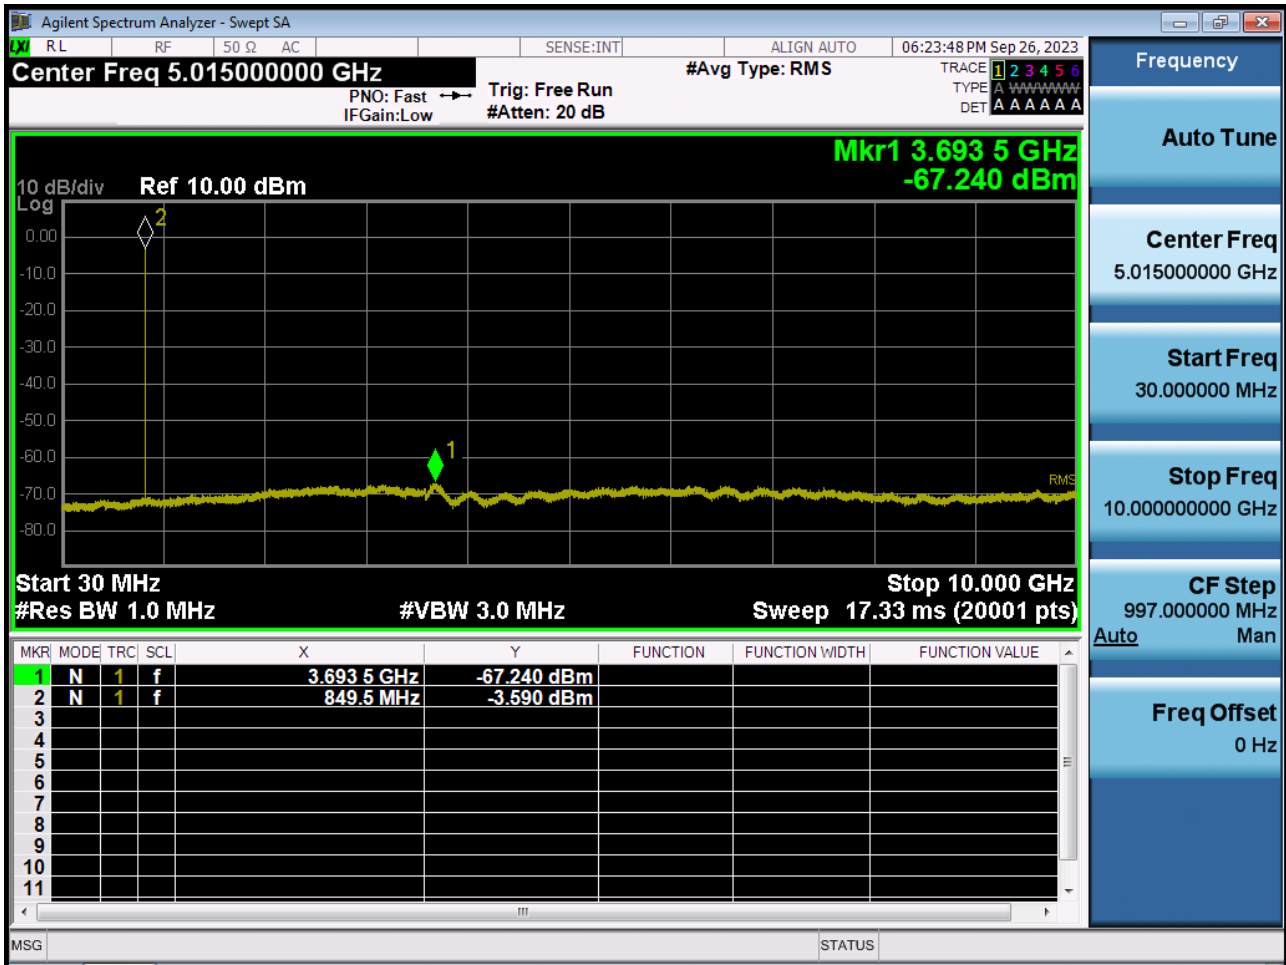


BAND5/26. Conducted Spurious Plot (26805ch\_3 MHz\_QPSK\_RB 1\_0)

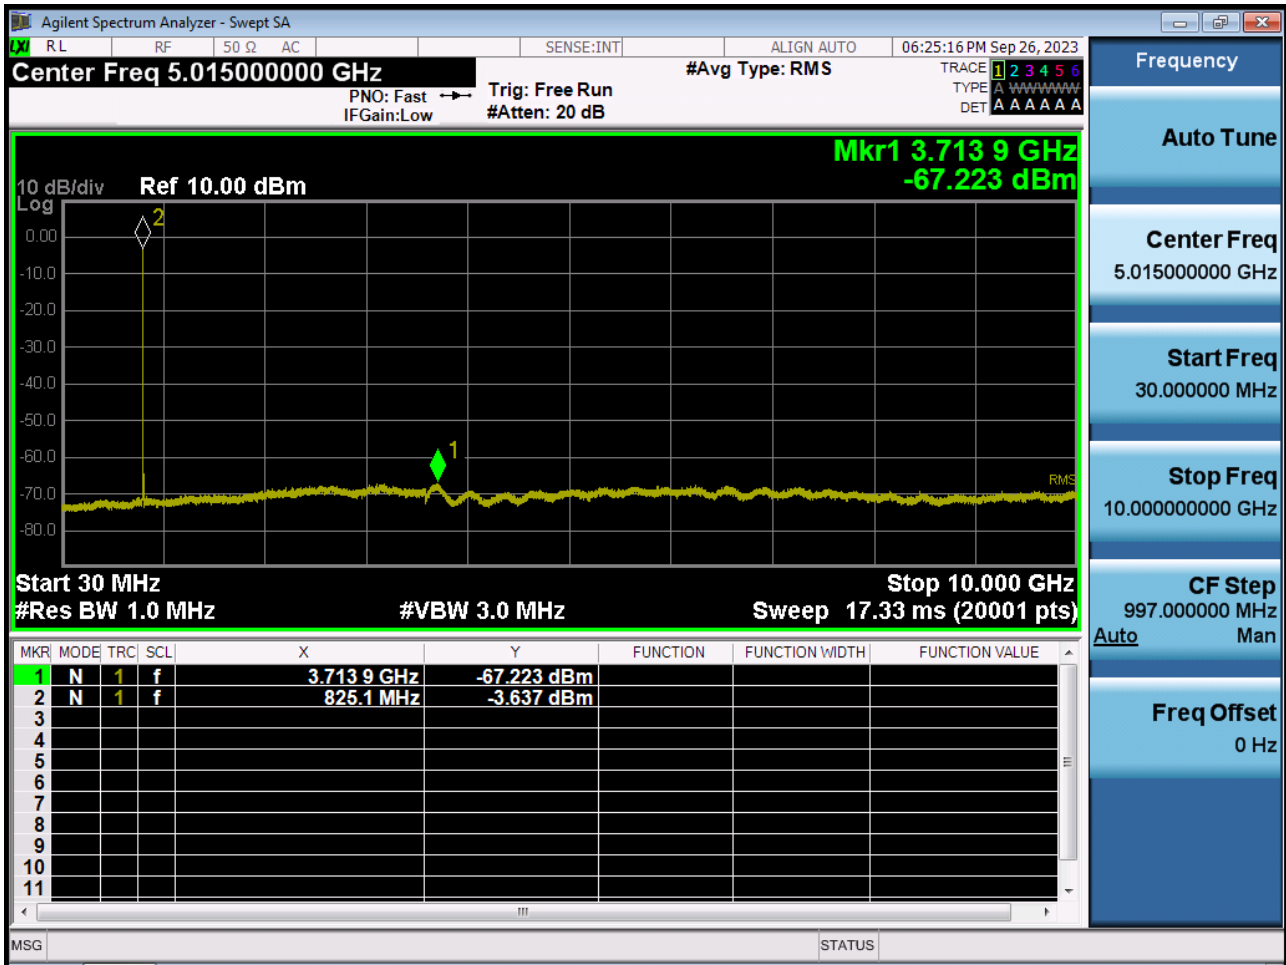


BAND5/26. Conducted Spurious Plot (26915ch\_3 MHz\_QPSK\_RB 1\_0)

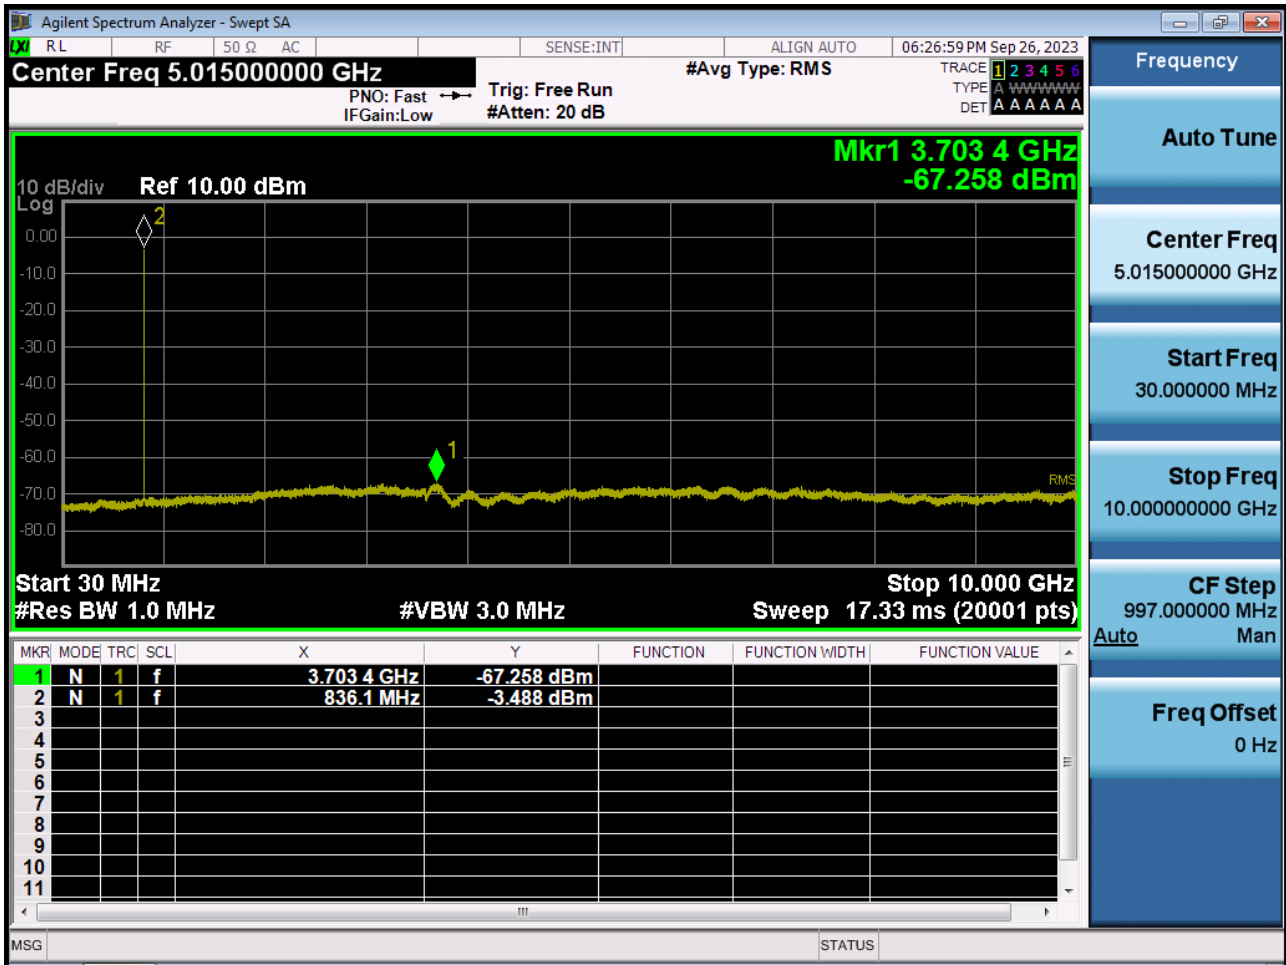


BAND5/26. Conducted Spurious Plot (27025ch\_3 MHz\_QPSK\_RB 1\_0)

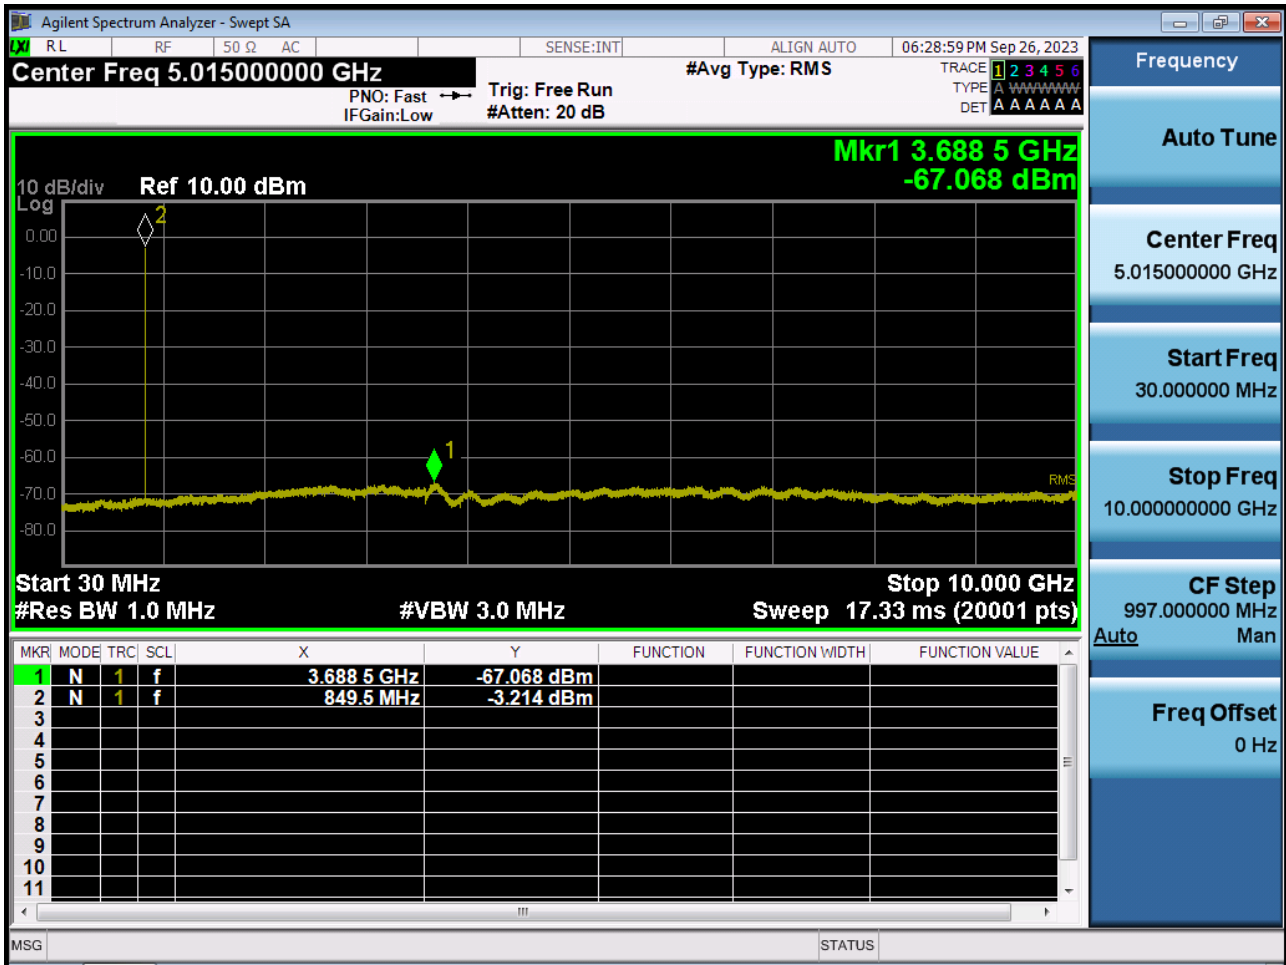


BAND5/26. Conducted Spurious Plot (26815ch\_5 MHz\_QPSK\_RB 1\_0)

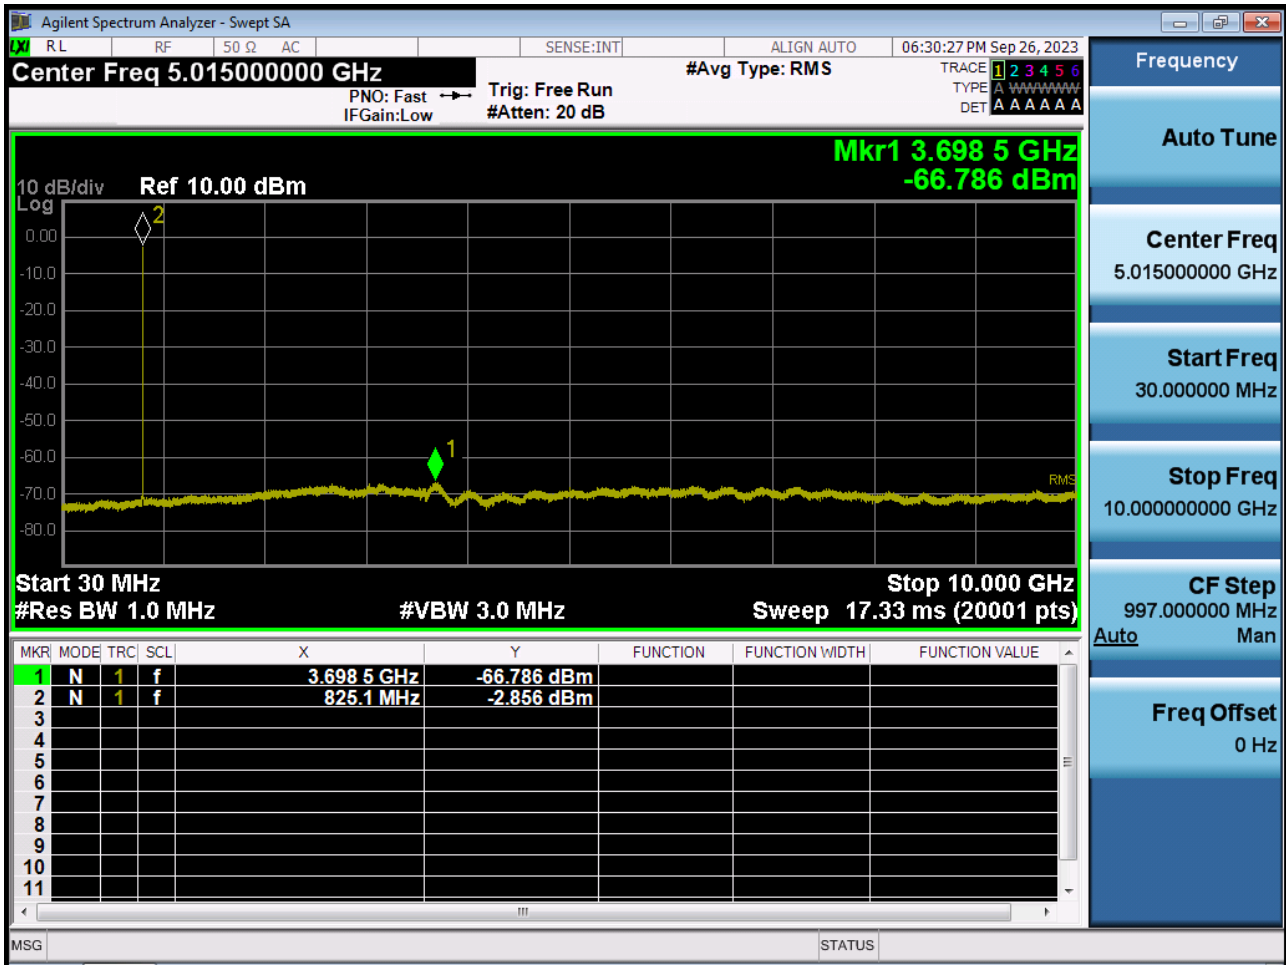


BAND5/26. Conducted Spurious Plot (26915ch\_5 MHz\_QPSK\_RB 1\_0)

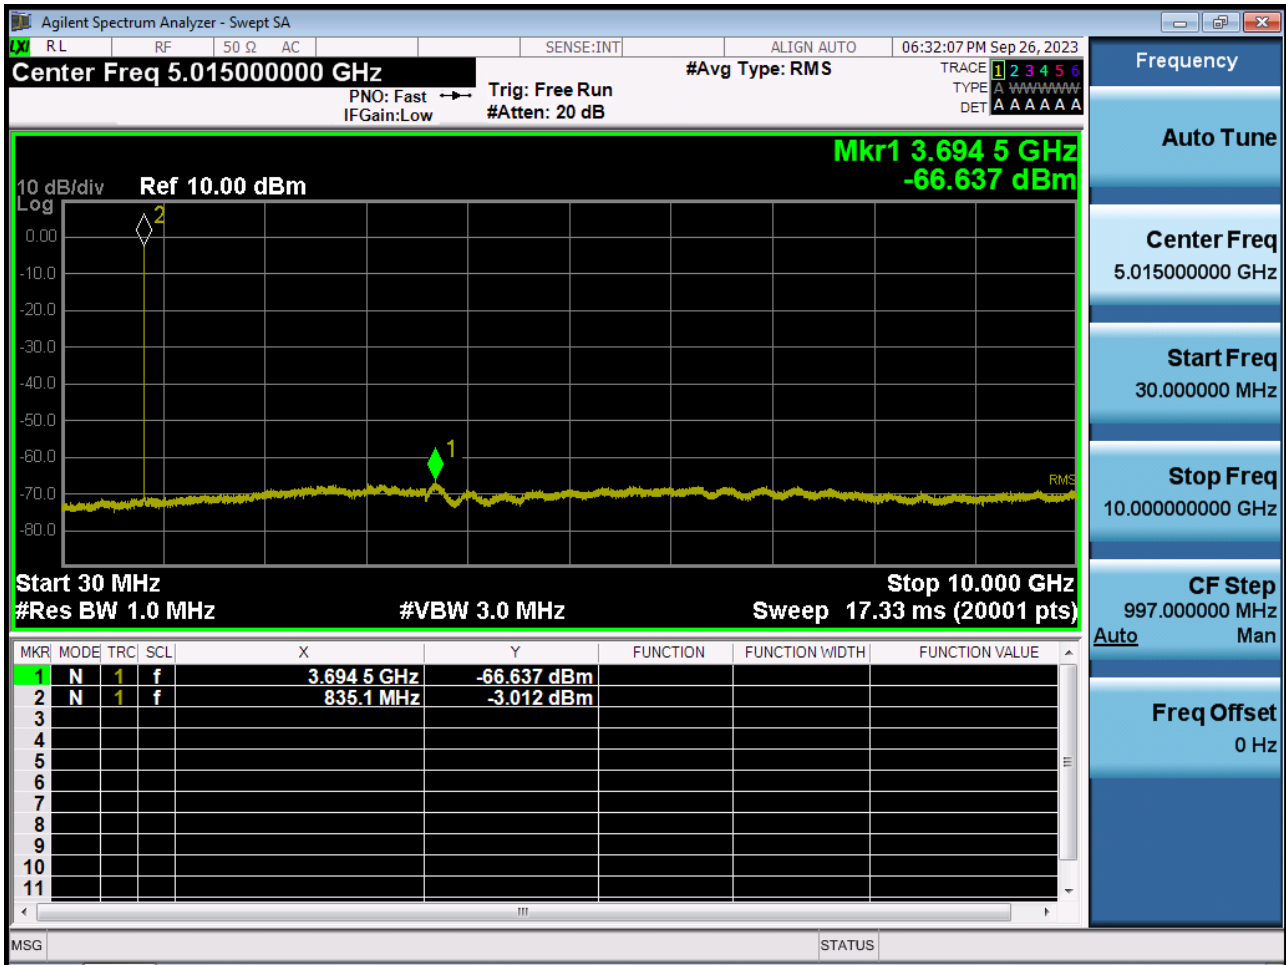

BAND5/26. Conducted Spurious Plot (27015ch\_5 MHz\_QPSK\_RB 1\_0)

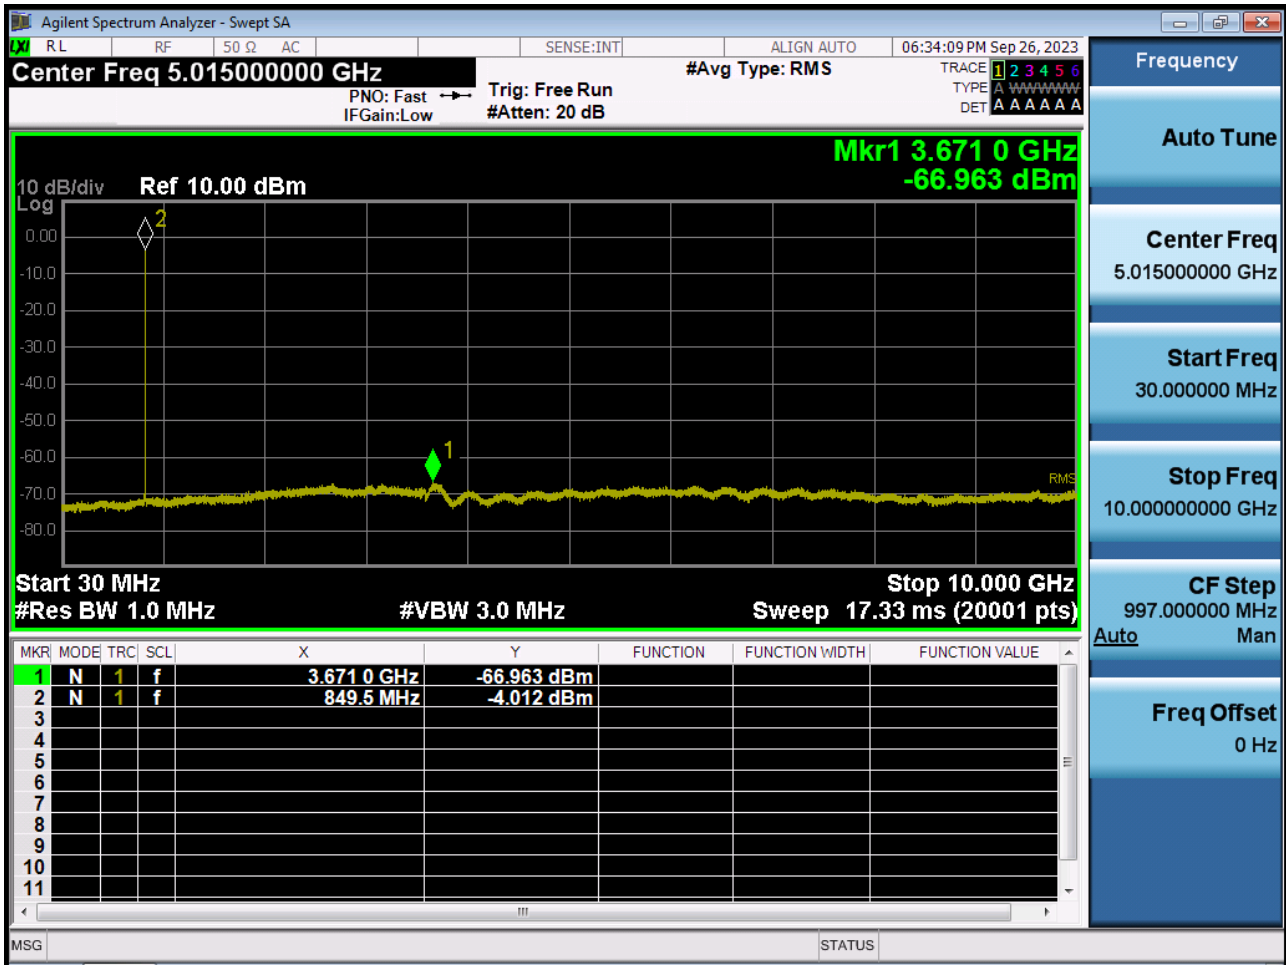


BAND5/26. Conducted Spurious Plot (26840ch\_10 MHz\_QPSK\_RB 1\_0)

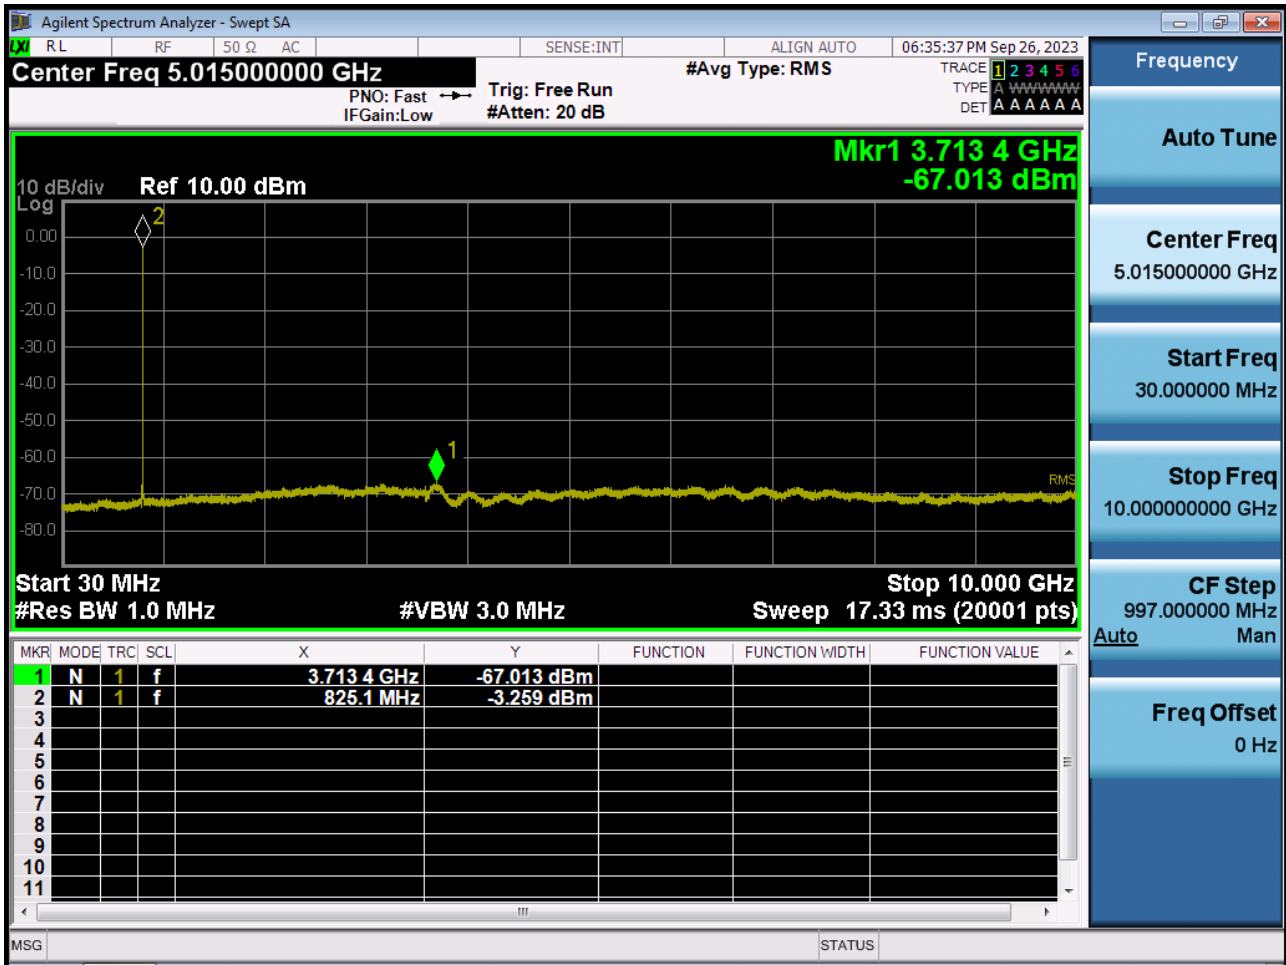





BAND5/26. Conducted Spurious Plot (26915ch\_10 MHz\_QPSK\_RB 1\_0)

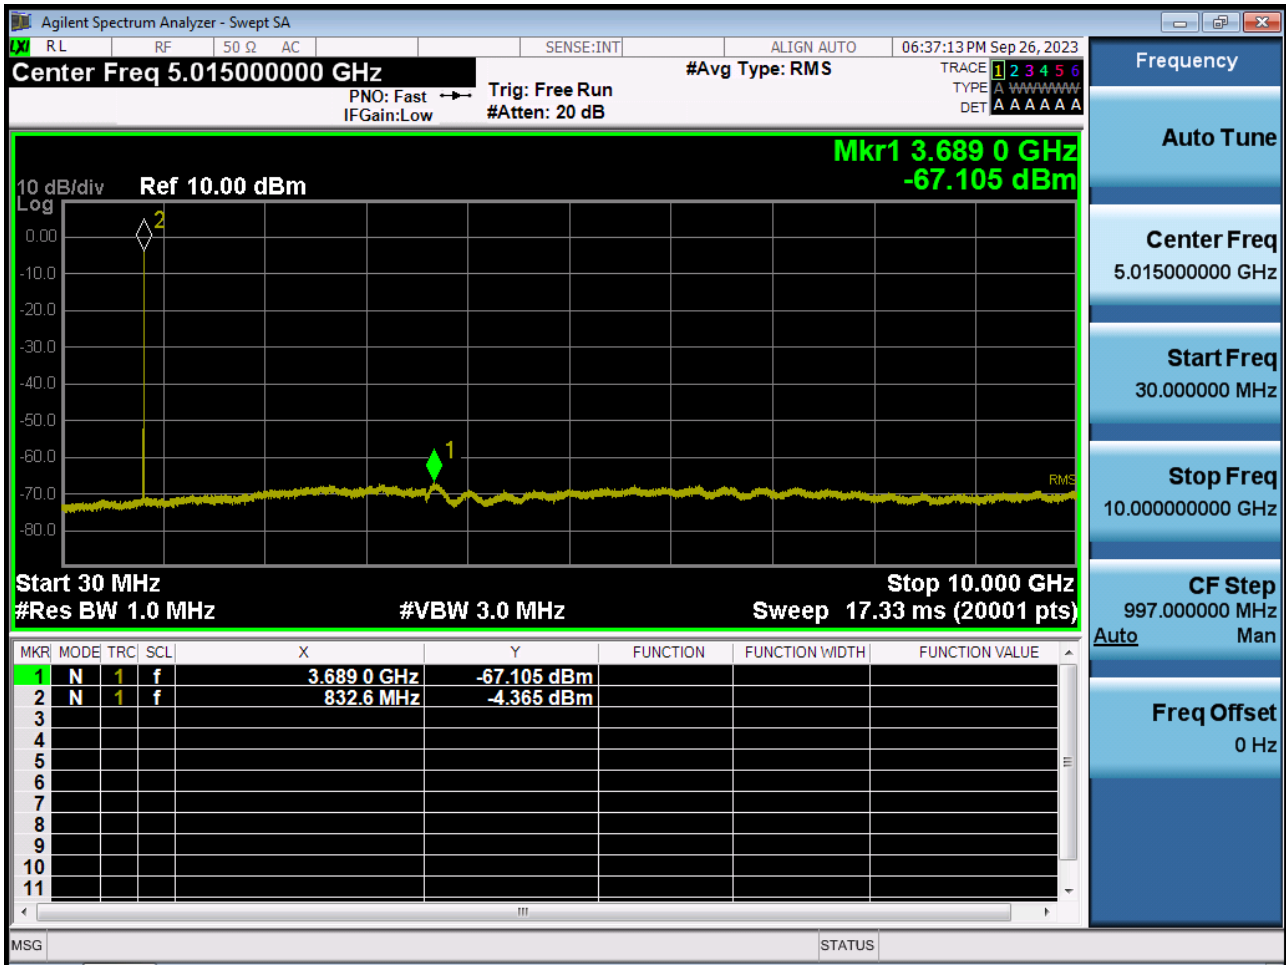


BAND5/26. Conducted Spurious Plot (26990ch\_10 MHz\_QPSK\_RB 1\_0)

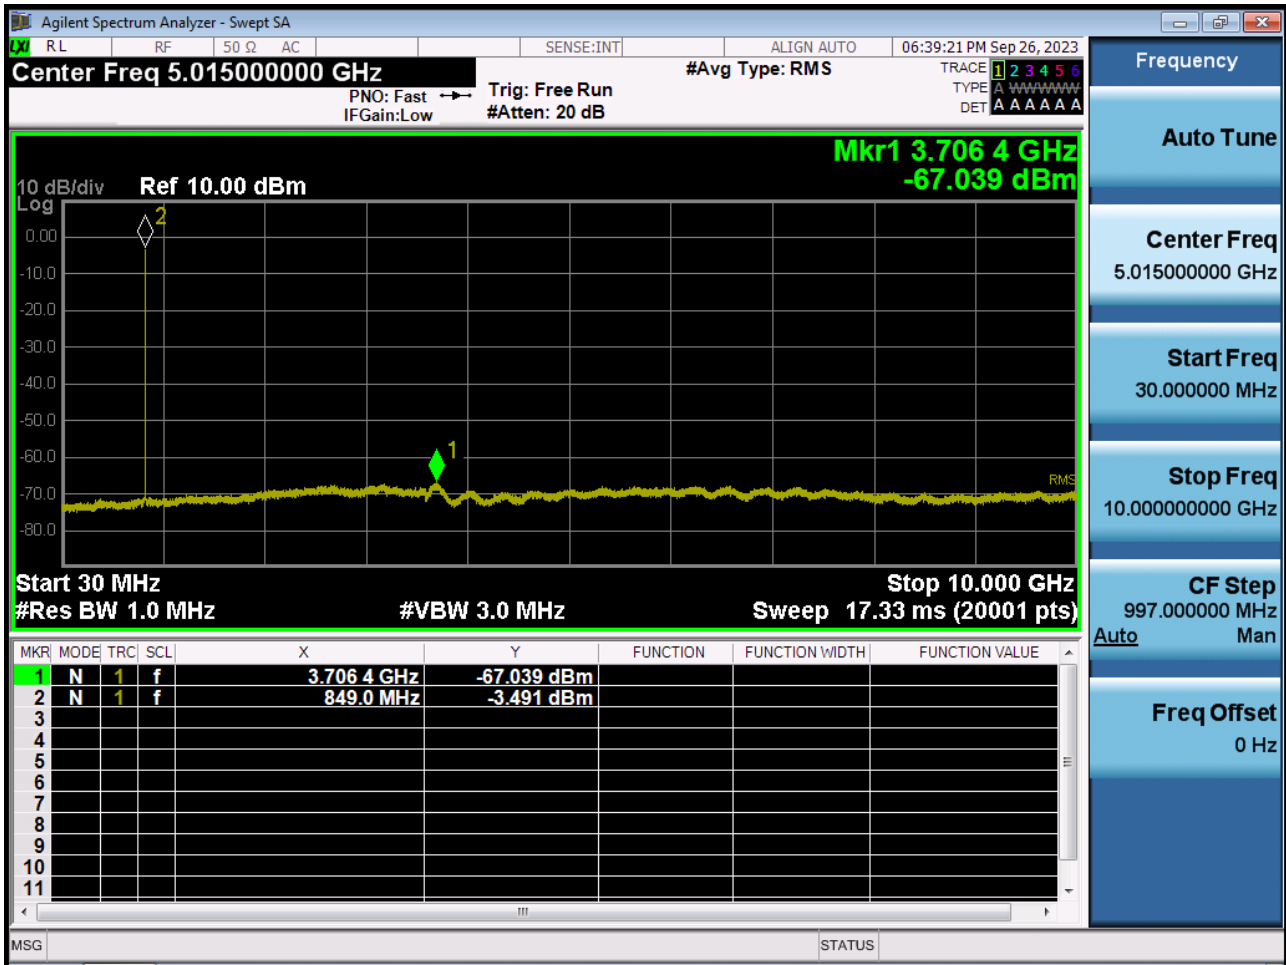


BAND 26. Conducted Spurious (26865ch\_15 MHz\_QPSK\_RB 1\_0)

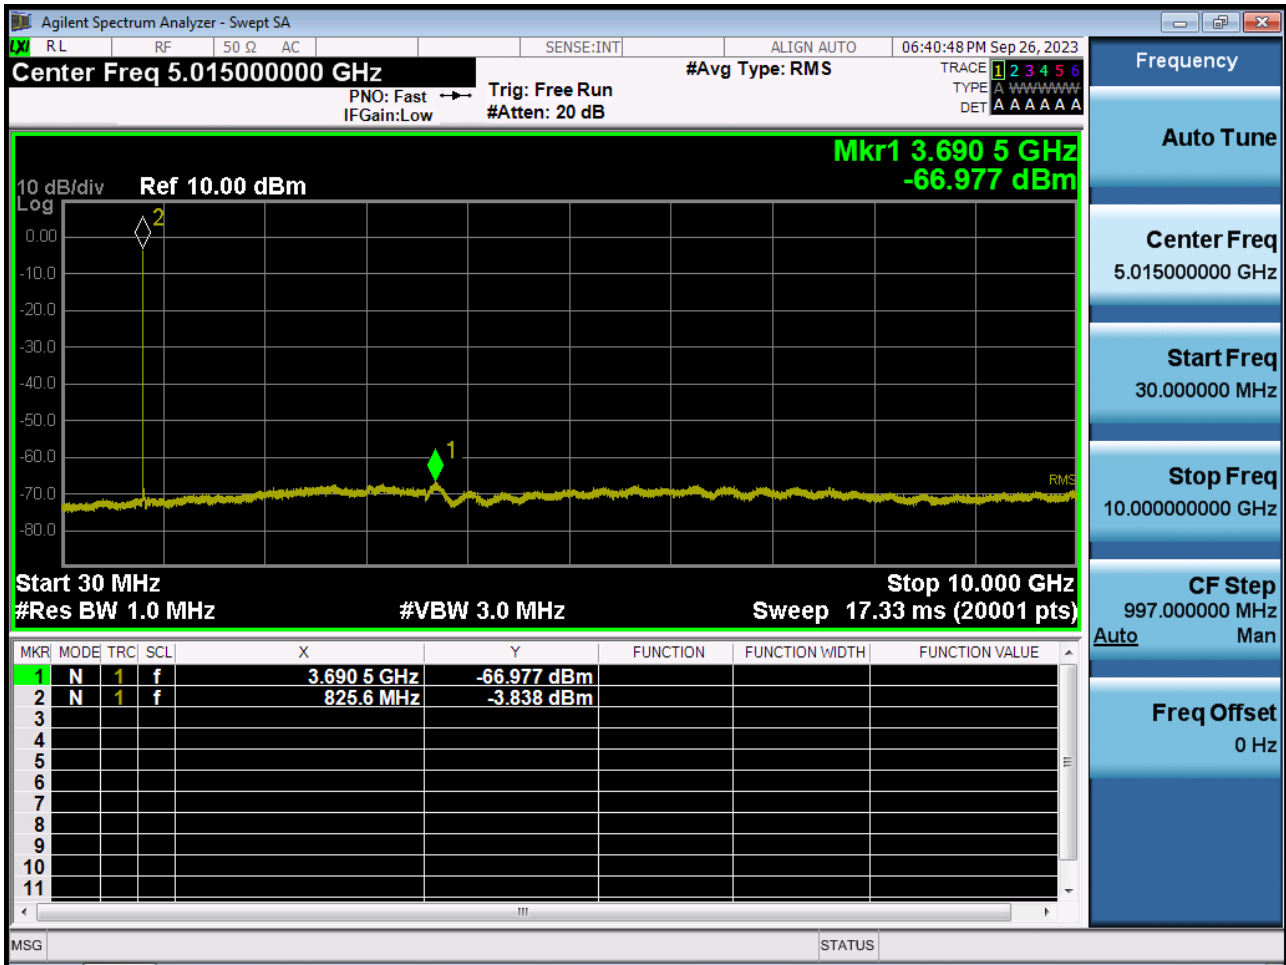

BAND 26. Conducted Spurious (26915ch\_15 MHz\_QPSK\_RB 1\_0)

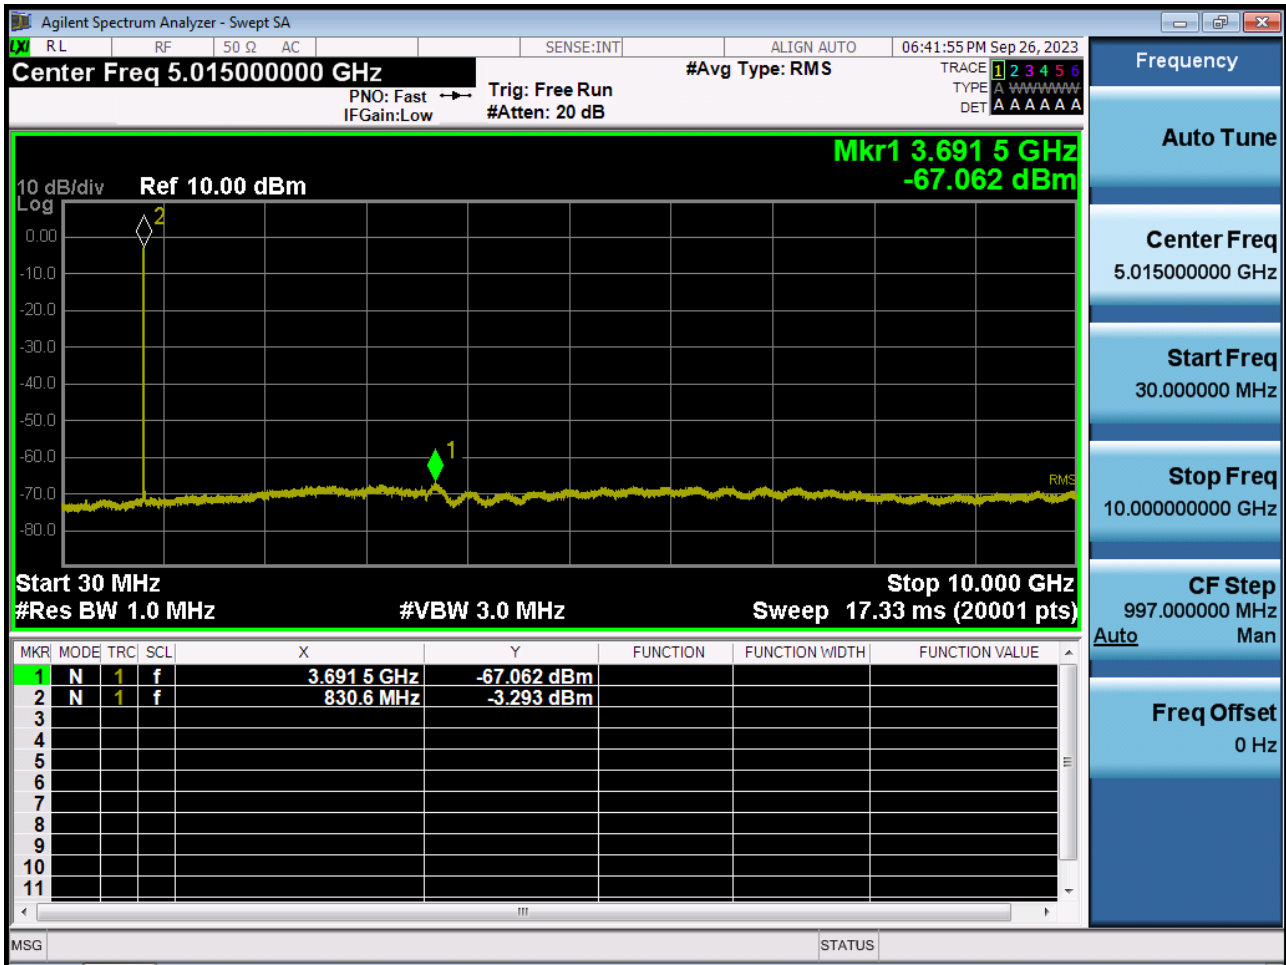


BAND 26. Conducted Spurious (26965ch\_15 MHz\_QPSK\_RB 1\_0)

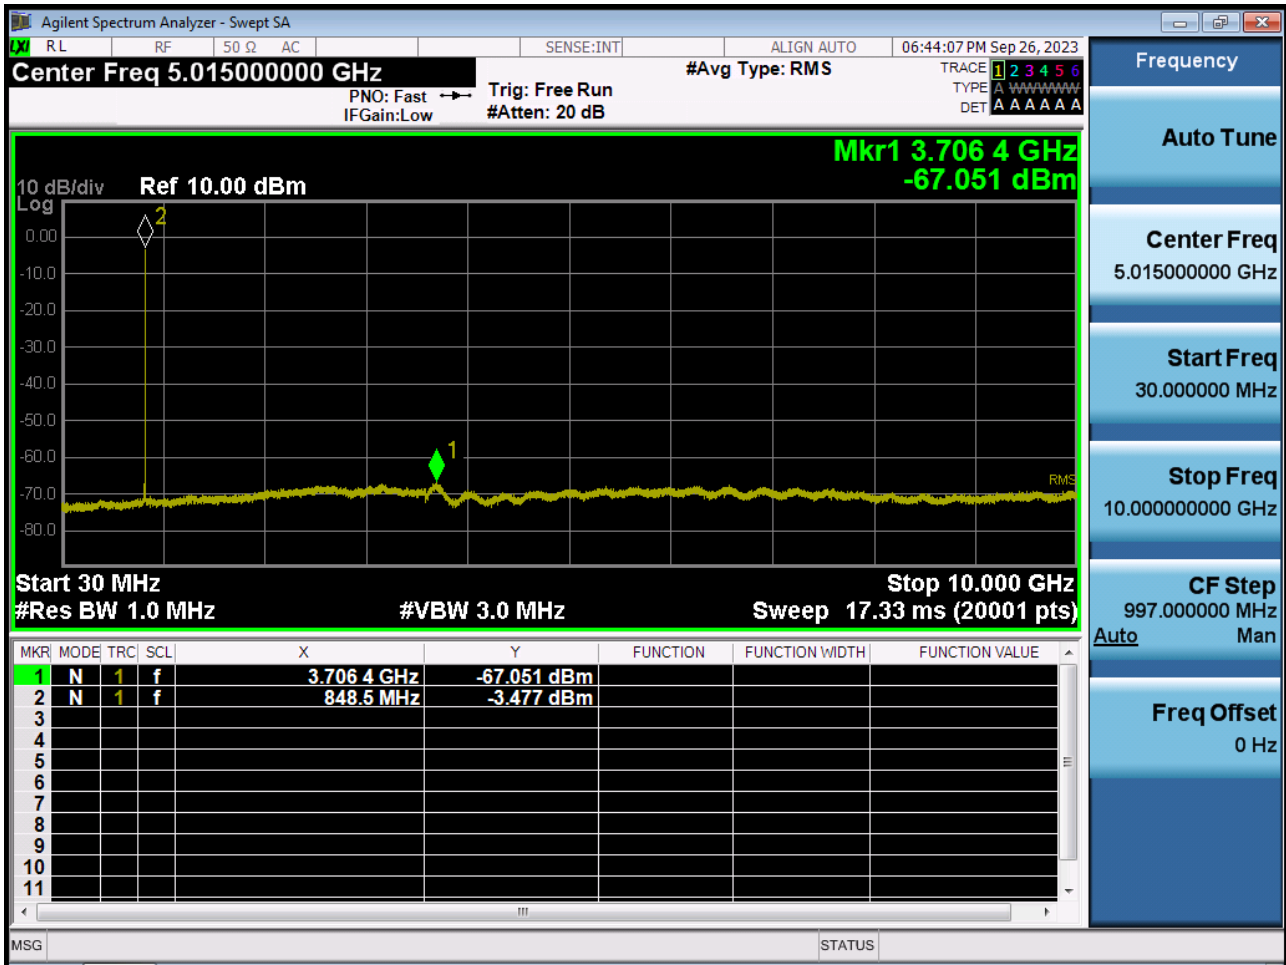


## 11. TEST PLOTS(Sub 1 Ant)

BAND5/26. Occupied Bandwidth Plot (1.4 M BW Ch.26915 QPSK\_RB6\_0)

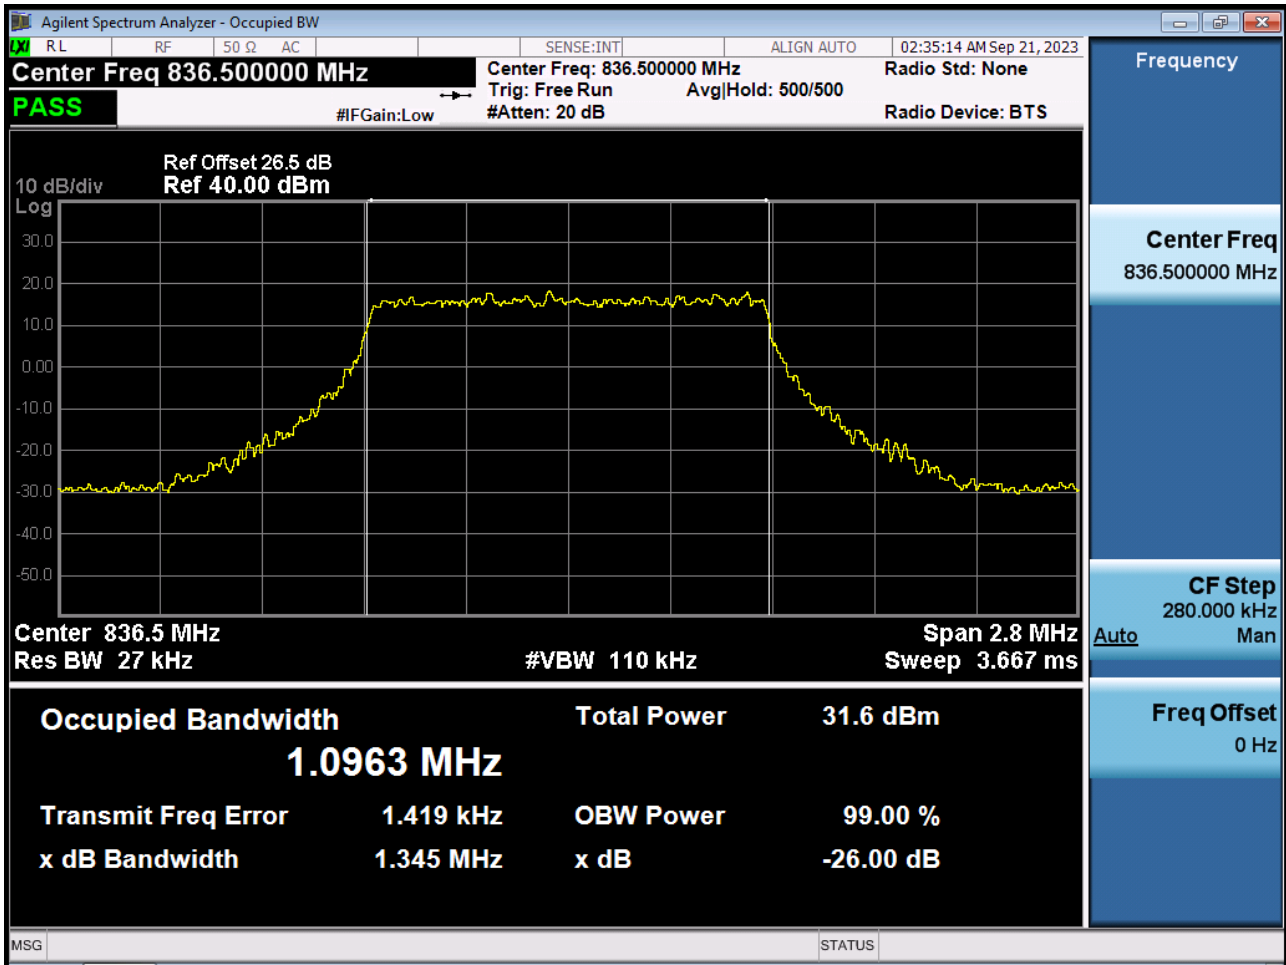


BAND5/26. Occupied Bandwidth Plot (1.4 M BW Ch.26915 16QAM\_RB6\_0)

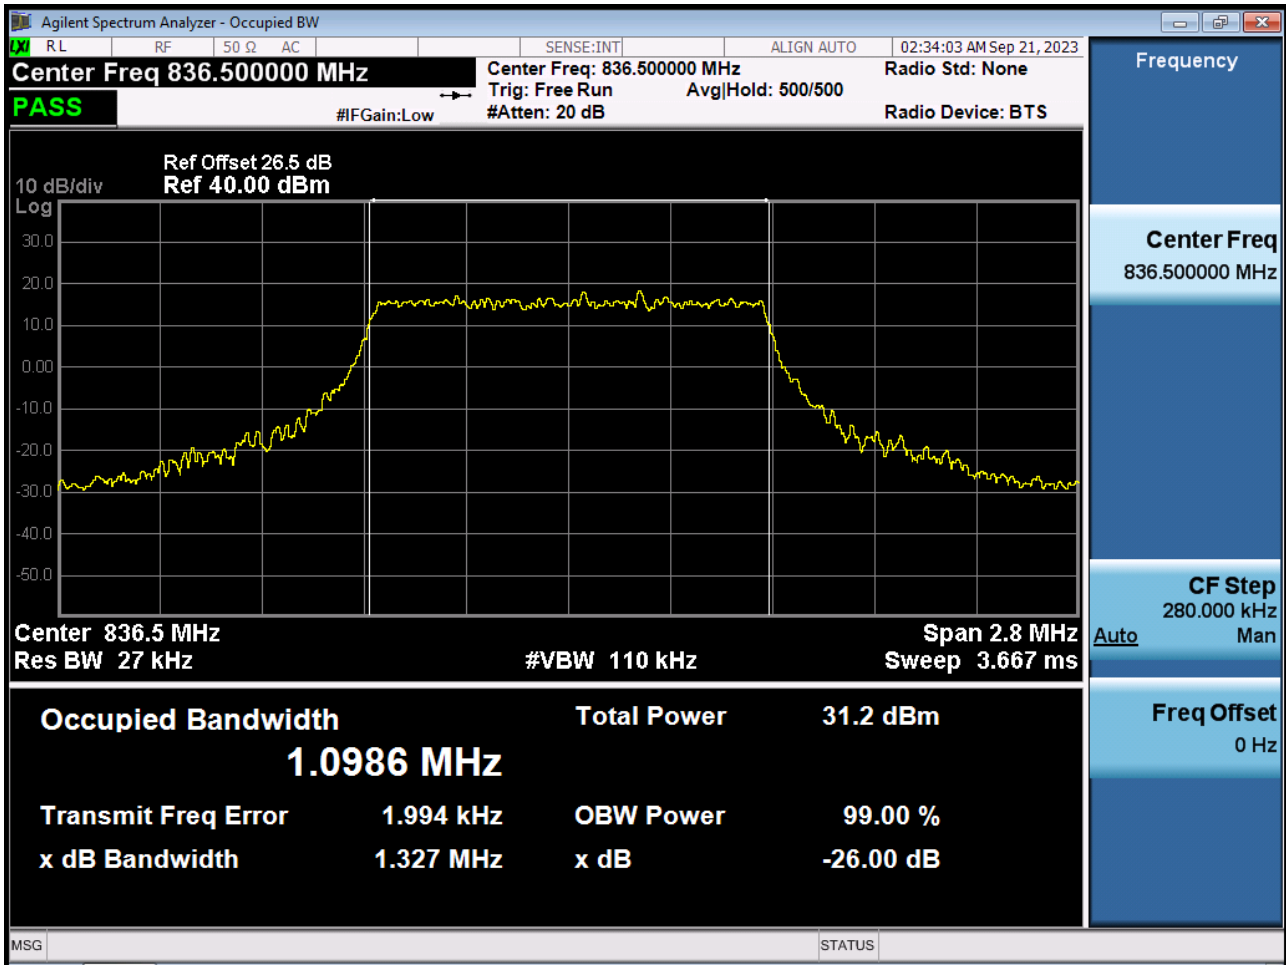





BAND5/26. Occupied Bandwidth Plot (1.4 M BW Ch.26915 64QAM\_RB6\_0)

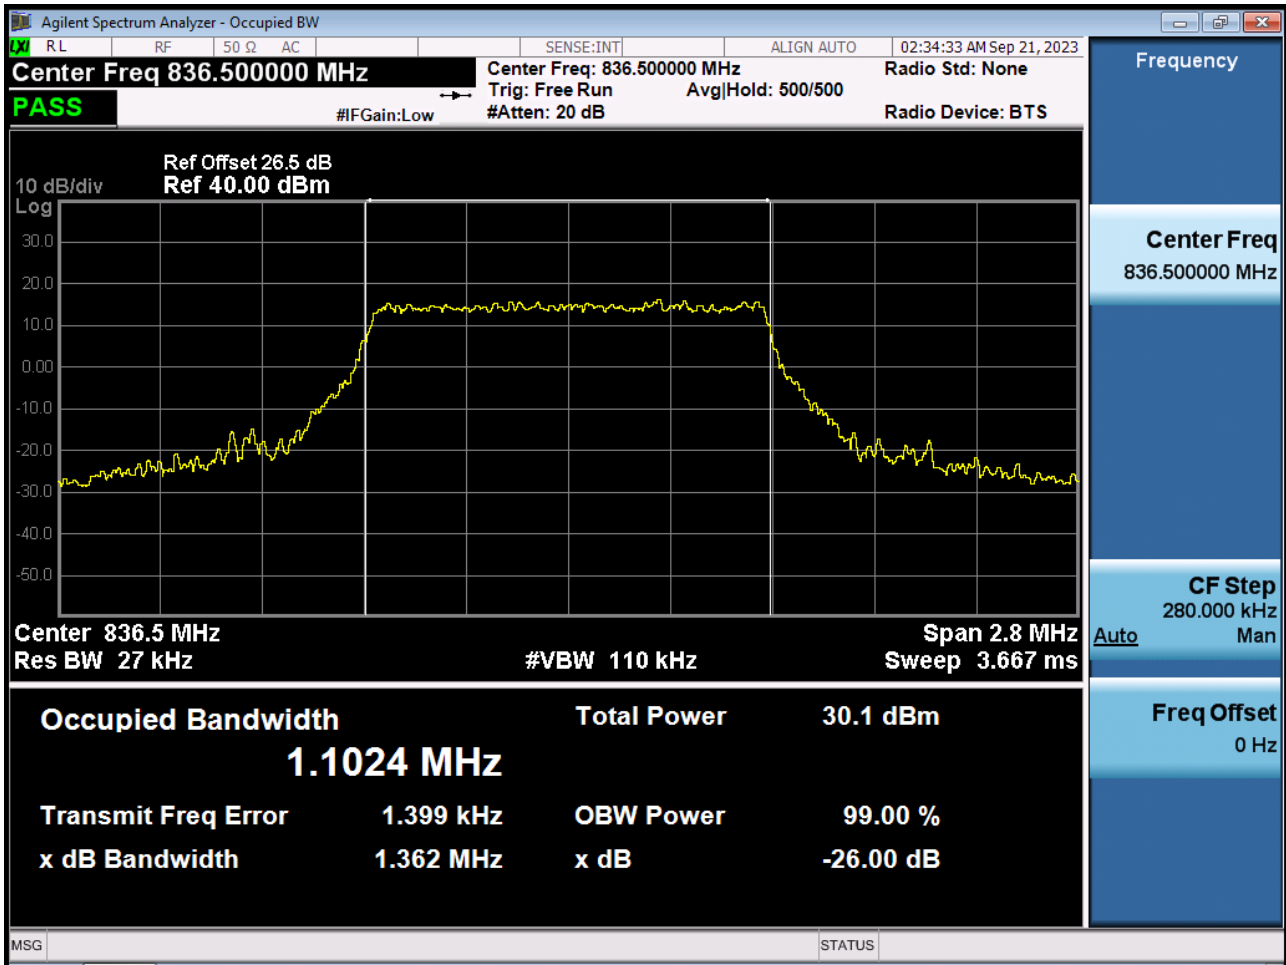


BAND5/26. Occupied Bandwidth Plot (1.4 M BW Ch.26915 256QAM\_RB6\_0)

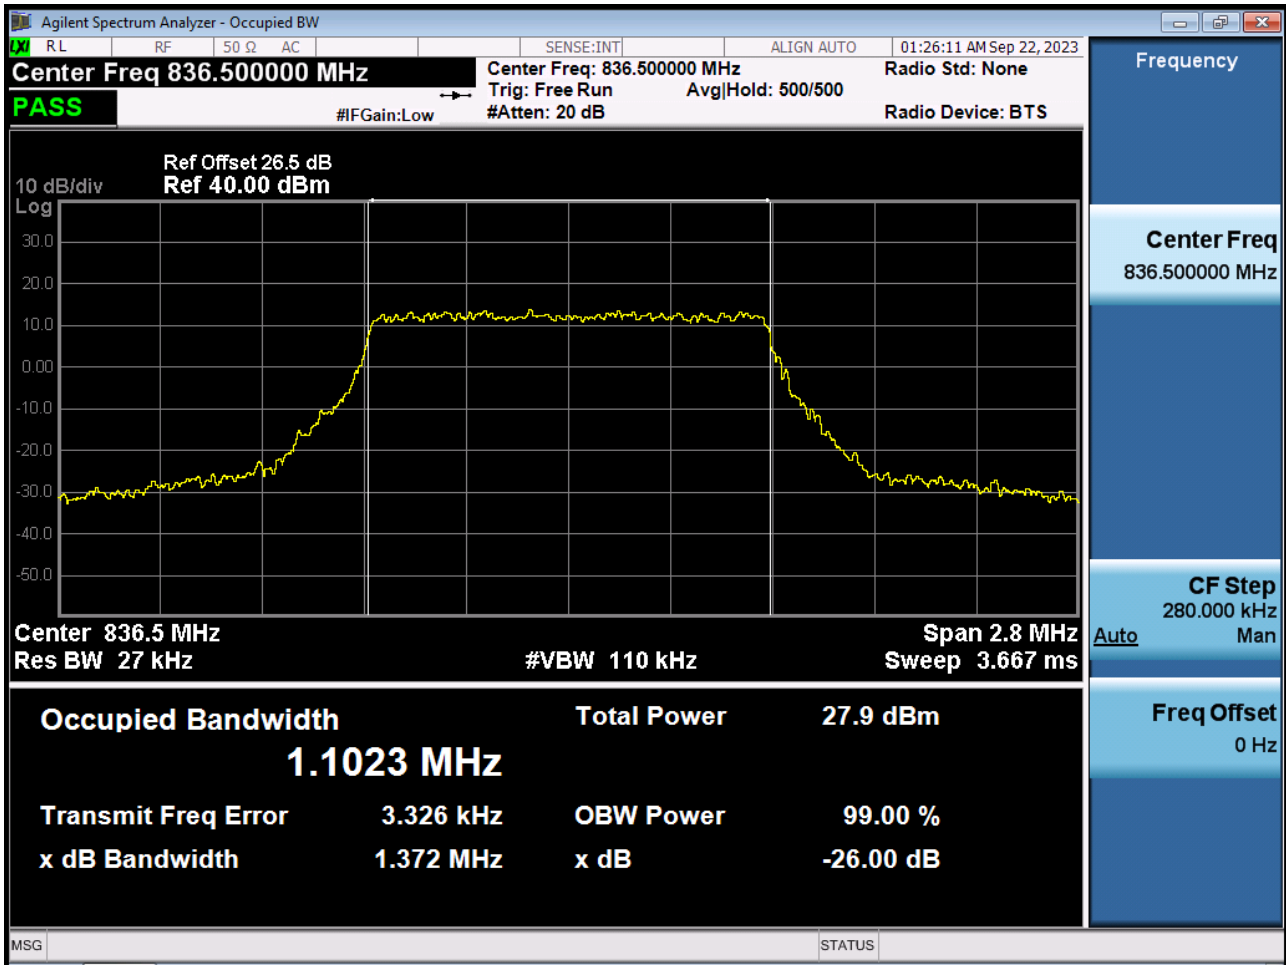


BAND5/26. Occupied Bandwidth Plot (3 M BW Ch.26915 QPSK\_RB15\_0)

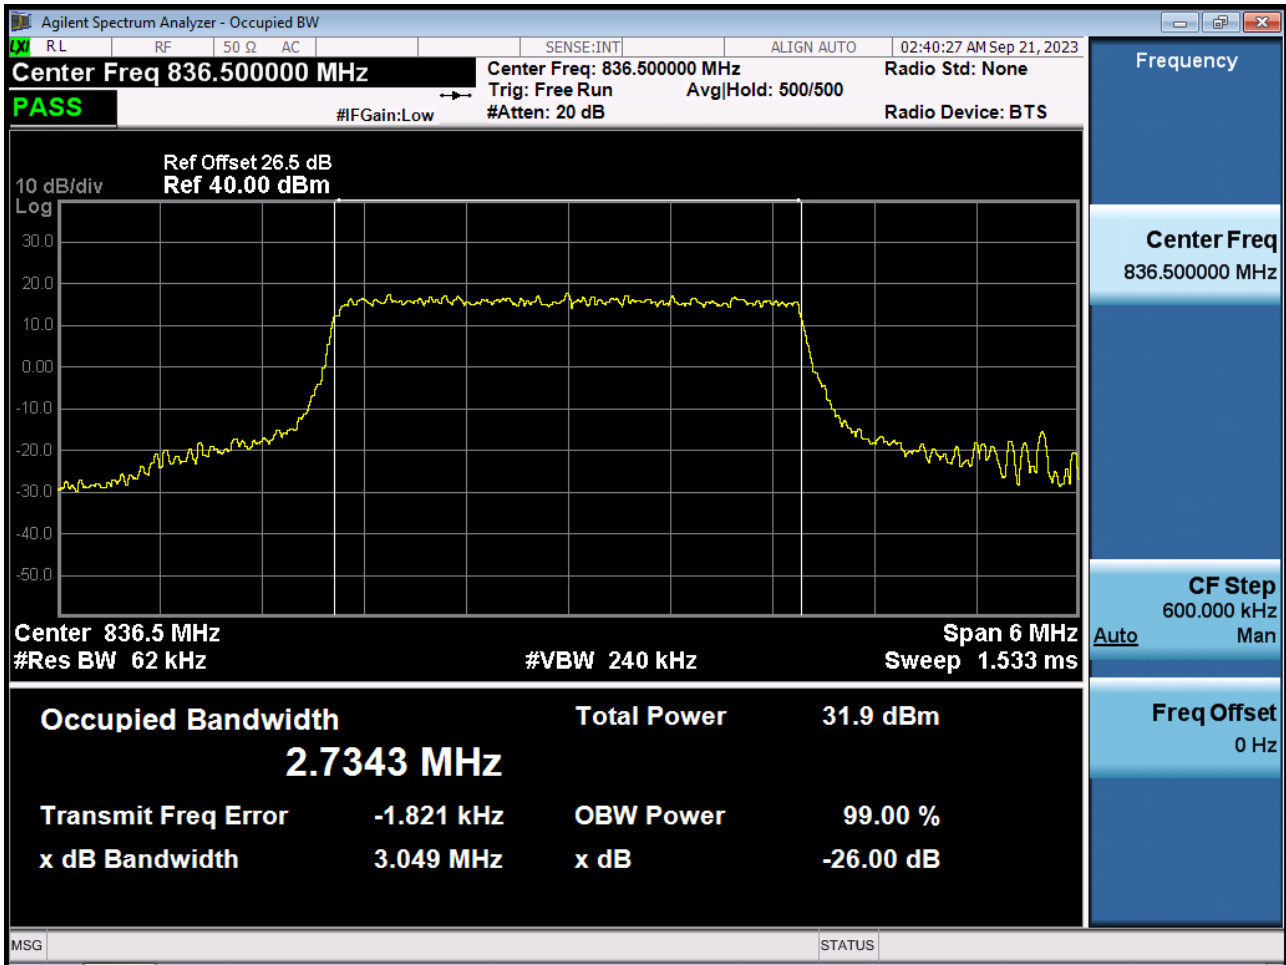

BAND5/26. Occupied Bandwidth Plot (3 M BW Ch.26915 16QAM\_RB15\_0)

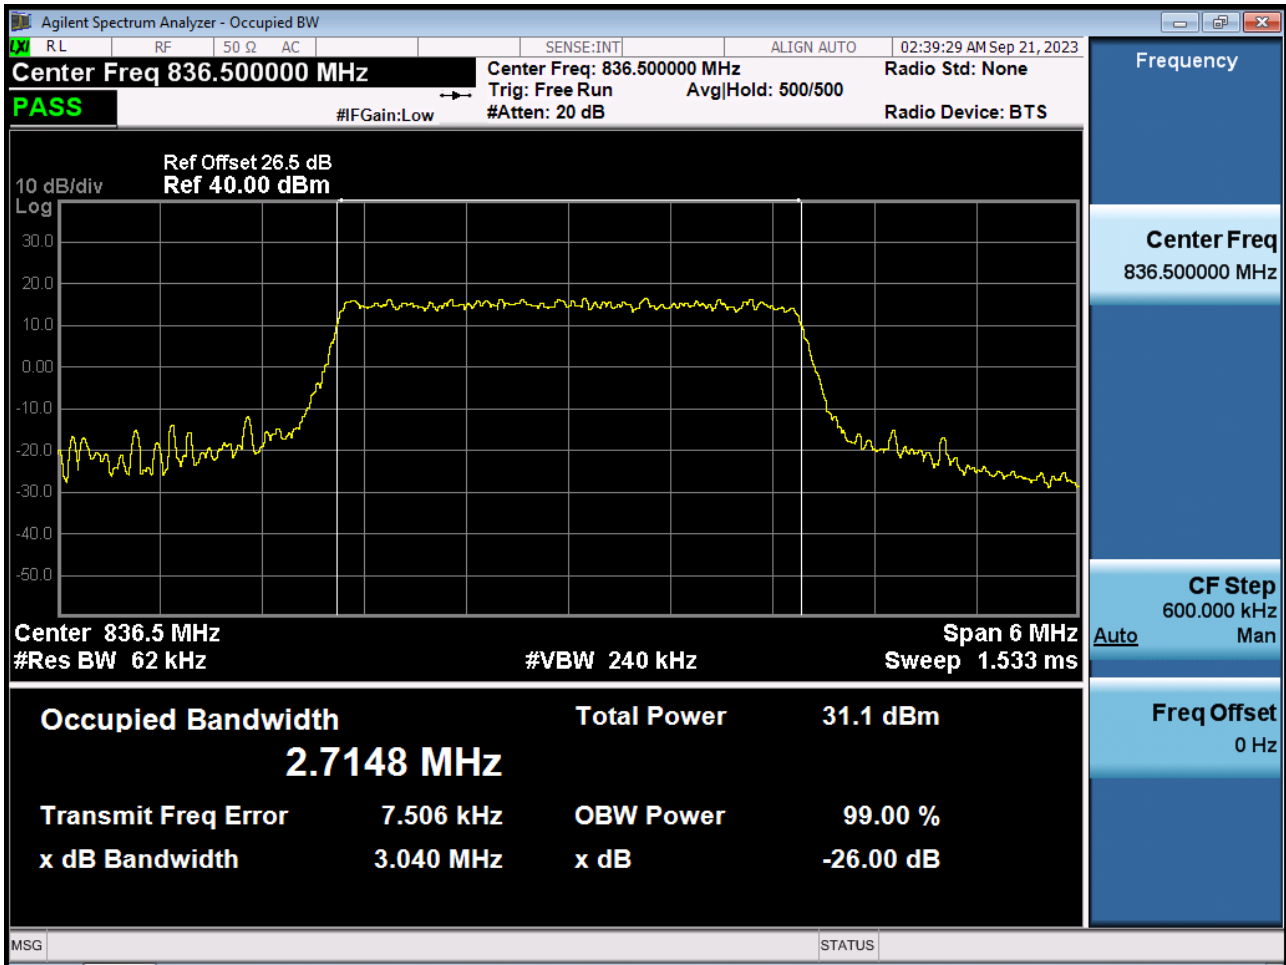

BAND5/26. Occupied Bandwidth Plot (3 M BW Ch.26915 64QAM\_RB15\_0)

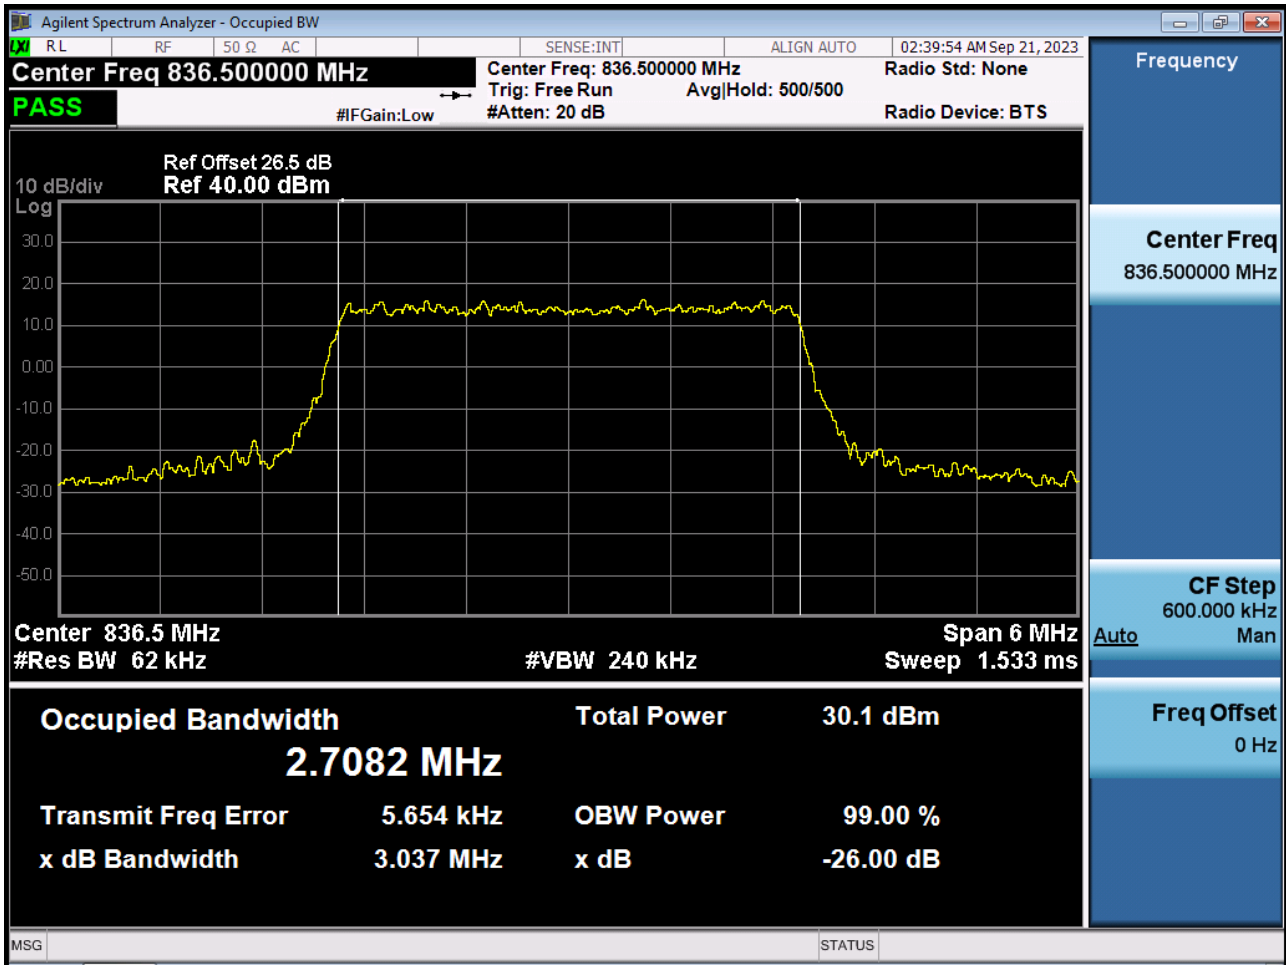

BAND5/26. Occupied Bandwidth Plot (3 M BW Ch.26915 256QAM\_RB15\_0)

