



# ELEMENT SUWON

13, Heungdeok 1-ro, Giheung-gu, Yongin-si,  
Gyeonggi-do, 16954 South Korea  
Tel. 031.660.7319 / Fax 031.660.7318  
<http://www.element.com>

## PART 22 & 90 MEASUREMENT REPORT

**Applicant Name:**  
Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**  
8/23/2023 - 10/18/2023  
**Test Report Issue Date:**  
11/7/2023  
**Test Site/Location:**  
Element lab., Gyeonggi-do, South Korea  
**Test Report Serial No.:**  
1M2308210093-06.A3L

<b>FCC ID:</b>	<b>A3LSMS928B</b>
<b>APPLICANT:</b>	<b>Samsung Electronics Co., Ltd.</b>

<b>Application Type:</b>	Certification
<b>Model:</b>	SM-S928B/DS
<b>Additional Model(s):</b>	SN-S928B
<b>EUT Type:</b>	Portable Handset
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part:</b>	§22(H), §90(S), §90(R)
<b>Test Procedure(s):</b>	ANSI C63.26-2015, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Prepared by

Reviewed by

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-06.A3L	<b>Test Dates:</b> 8/23/2023 - 10/18/2023	<b>EUT Type:</b> Portable Handset	Page 1 of 50

## TABLE OF CONTENTS

1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities.....	5
2.3	Test Configuration .....	5
2.4	Software and Firmware .....	5
2.5	EMI Suppression Device(s)/Modifications .....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	Evaluation Procedure .....	6
3.2	Radiated Power and Radiated Spurious Emissions .....	6
4.0	MEASUREMENT UNCERTAINTY .....	7
5.0	TEST EQUIPMENT CALIBRATION DATA .....	8
6.0	SAMPLE CALCULATIONS .....	9
7.0	TEST RESULTS .....	10
7.1	Summary.....	10
7.2	Conducted Output Power Data .....	11
7.3	Occupied Bandwidth .....	13
7.4	Spurious and Harmonic Emissions at Antenna Terminal .....	26
7.5	Band Edge Emissions at Antenna Terminal .....	33
7.6	Radiated Power (ERP).....	38
7.7	Radiated Spurious Emissions Measurements.....	41
7.8	Frequency Stability / Temperature Variation .....	48
8.0	CONCLUSION.....	50

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-06.A3L	<b>Test Dates:</b> 8/23/2023 - 10/18/2023	<b>EUT Type:</b> Portable Handset	Page 2 of 50

## MEASUREMENT REPORT

### FCC Part 22 & 90

Antenna-0							
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	Measurement	Max. Power [W]	Max. Power [dBm]	Emission Designator
LTE Band 26	15 MHz	QPSK	821.5	ERP	0.066	18.22	13M5G7D
		16QAM	821.5	ERP	0.053	17.28	13M5W7D
	15 MHz	QPSK	821.5	Conducted	0.260	24.15	13M5G7D
		16QAM	821.5	Conducted	0.216	23.34	13M5W7D
	10 MHz	QPSK	819.0	Conducted	0.273	24.36	9M01G7D
		16QAM	819.0	Conducted	0.216	23.35	9M00W7D
	5 MHz	QPSK	816.5 - 821.5	Conducted	0.272	24.35	4M54G7D
		16QAM	816.5 - 821.5	Conducted	0.211	23.25	4M55W7D
	3 MHz	QPSK	815.5 - 822.5	Conducted	0.269	24.30	2M72G7D
		16QAM	815.5 - 822.5	Conducted	0.215	23.33	2M71W7D
	1.4 MHz	QPSK	814.7 - 823.3	Conducted	0.259	24.14	1M11G7D
		16QAM	814.7 - 823.3	Conducted	0.213	23.28	1M11W7D

Antenna-6							
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	Measurement	Max. Power [W]	Max. Power [dBm]	Emission Designator
LTE Band 26	15 MHz	QPSK	821.5	ERP	0.283	24.52	13M5G7D
		16QAM	821.5	ERP	0.227	23.56	13M5W7D
	15 MHz	QPSK	821.5	Conducted	0.279	24.46	13M5G7D
		16QAM	821.5	Conducted	0.217	23.36	13M5W7D
	10 MHz	QPSK	819.0	Conducted	0.287	24.58	9M02G7D
		16QAM	819.0	Conducted	0.236	23.73	9M04W7D
	5 MHz	QPSK	816.5 - 821.5	Conducted	0.278	24.44	4M53G7D
		16QAM	816.5 - 821.5	Conducted	0.228	23.58	4M53W7D
	3 MHz	QPSK	815.5 - 822.5	Conducted	0.286	24.56	2M72G7D
		16QAM	815.5 - 822.5	Conducted	0.223	23.48	2M71W7D
	1.4 MHz	QPSK	814.7 - 823.3	Conducted	0.271	24.33	1M10G7D
		16QAM	814.7 - 823.3	Conducted	0.225	23.53	1M11W7D

#### EUT Overview

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 3 of 50

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 Element Test Location

These measurement tests were conducted at the Element Suwon Laboratory located at 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 16954, South Korea. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology Suwon, Ltd. located in Yongin-si, Gyeonggi-do, 16954, South Korea.

- Element Materials Technology Suwon, Ltd. is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation(A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), and Electromagnetic Compatibility (EMC) & Telecommunications testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon, Ltd. facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
  - Designation Number / CABID: KR0169
  - Test Firm Registration Number of FCC: 417945
  - Test Firm Registration Number of ISSED: 26168

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 4 of 50

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS928B**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 90 and 22H.

**Test Device Serial No.: 0371M, 0736M, 0747M, 0748M**

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1), 802.11b/g/n/ac/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, UWB

This device uses a tuner circuit that dynamically updates the antenna impedance parameters to optimize antenna performance for certain bands and modes of operation. The tuner for this device was set to simulate a "free space" condition where the transmit antenna is matched to the medium into which it is transmitting and, thus, the power is at its maximum level.

Band	Ant 0	Ant 6
LTE Band 26	Ant A	Ant E

**Table 2-1. Antenna Naming Convention**

### 2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

### 2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version S928BXXU0AWH9 installed on the EUT.

### 2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 5 of 50

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

**Deviation from Measurement Procedure.....None**

### 3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-06.A3L	<b>Test Dates:</b> 8/23/2023 - 10/18/2023	<b>EUT Type:</b> Portable Handset	Page 6 of 50

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.95
Radiated Disturbance (<1GHz)	4.10
Radiated Disturbance (>1GHz)	4.82
Radiated Disturbance (>18GHz)	4.96

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 7 of 50

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9030A	PXA Signal Analyzer	2023-07-04	Annual	2024-07-03	MY49432391
Anritsu	S820E	Cable and Antenna Analyzer	2023-07-05	Annual	2024-07-04	1839097
Anritsu	MA24106A	USB Power Sensor	2023-07-05	Annual	2024-07-04	1244512
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	2022-10-21	Biennial	2024-10-20	10160045
Com-Power	PAM-118A	Preamplifier	2023-07-05	Annual	2024-07-04	551042
Espec	SH-242	Environmental Chamber	2023-07-05	Annual	2024-07-04	93011064
Fairview Microwave	FM2CP1122-10	2.92mm Directional Coupler	2023-07-04	Annual	2024-07-03	1946
Keysight Technologies	N9030B	MXA Signal Analyzer	2023-07-04	Annual	2024-07-03	MY57143276
Mini-Circuits	BW-N10W5+	Attenuator	2023-07-04	Annual	2024-07-03	1607
Mini-Circuits	BW-N10W5+	Attenuator	2023-07-04	Annual	2024-07-03	1607
Rohde & Schwarz	TS-PR18	Preamplifier	2023-07-05	Annual	2024-07-04	102141
Rohde & Schwarz	SMB100A03	Signal Generator	2023-01-17	Annual	2024-01-16	182487
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	2023-02-17	Annual	2024-02-16	131453
Rohde & Schwarz	FSW43	Signal and Spectrum Analyzer	2023-01-13	Annual	2024-01-12	101955
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2023-02-17	Annual	2024-02-16	102131
Rohde & Schwarz	TC-TA18	VIVALDI-ANT	2021-10-22	Biennial	2023-10-21	101097
Rohde & Schwarz	TC-TA18	VIVALDI-ANT	2021-10-22	Biennial	2023-10-21	101098
Schwarzbeck	VULB9162	Broadband TRILOG Antenna	2023-06-01	Biennial	2025-05-31	9162-217
Schwarzbeck	UHA9105	Dipole Antenna	2022-07-19	Biennial	2024-07-18	91052522
Sunol	DRH-118	Horn Antenna	2023-01-26	Biennial	2025-01-25	A060215

**Table 5-1. Test Equipment**

### Notes:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 8 of 50



## 6.0 SAMPLE CALCULATIONS

### Emission Designator

#### QPSK Modulation

**Emission Designator = 8M62G7D**

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

#### QAM Modulation

**Emission Designator = 8M45W7D**

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

### Spurious Radiated Emission – LTE Band

#### **Example: Middle Channel LTE Mode 2<sup>nd</sup> Harmonic (1564 MHz)**

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was 25.501 dBm so this harmonic was  $25.501$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 9 of 50

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSMS928B  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 Mode(s): LTE

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power	2.1046(a), 90.635(b)	< 100 Watts	PASS	Section 7.2
	Occupied Bandwidth	2.1049(h)	N/A	PASS	Section 7.3
	Conducted Band Edge / Spurious Emissions (LTE Band 26)	2.1051, 90.691(a)	> 43 + 10 log <sub>10</sub> (P[Watts]) for all out-of-band emissions except emissions beyond 37.5kHz from the block edge > 50 + 10 log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge	PASS	Sections 7.4, 7.5
	Frequency Stability	2.1055, 90.213	< 2.5 ppm **Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
RADIATED	Effective Radiated Power (LTE Band 26)	22.913(a)(2)	< 7 Watts max. ERP	PASS	Section 7.6
	Radiated Spurious Emissions (LTE Band 26)	2.1053, 90.691(a)	> 43 + 10 log <sub>10</sub> (P[Watts]) for all out-of-band emissions except emissions beyond 37.5kHz from the block edge > 50 + 10 log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge	PASS	Section 7.7

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v1.1.

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 10 of 50

## 7.2 Conducted Output Power Data

### Test Overview

All emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

### Test Procedure Used


ANSI C63.26-2015 – Section 5.2

### Test Settings

1. Span = 2 x OBW to 3 x OBW
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

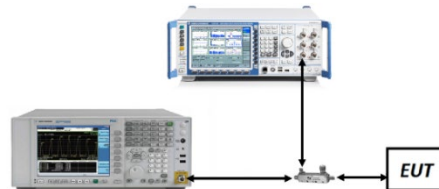

**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes

1. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
2. Conducted power measurements were evaluated using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
3. Conducted power was found to reduce for the higher order QAM modulations when compared to 16QAM. Due to this trend, only the worst-case QAM (16QAM) powers are included in this section.

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 11 of 50

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]	Conducted Power [Watts]	Conducted Power Limit [dBm]	Margin [dB]
15 MHz	QPSK	26765	821.5	1 / 37	24.15	0.260	50.00	-25.85
	16-QAM	26765	821.5	1 / 37	23.34	0.216	50.00	-26.66
10 MHz	QPSK	26740	819.0	1 / 25	24.36	0.273	50.00	-25.64
	16-QAM	26740	819.0	1 / 25	23.35	0.216	50.00	-26.65
5 MHz	QPSK	26715	816.5	1 / 12	24.13	0.259	50.00	-25.87
		26765	821.5	1 / 12	24.35	0.272	50.00	-25.65
	16-QAM	26715	816.5	1 / 12	23.21	0.209	50.00	-26.79
		26765	821.5	1 / 12	23.25	0.211	50.00	-26.75
3 MHz	QPSK	26705	815.5	1 / 7	24.20	0.263	50.00	-25.80
		26775	822.5	1 / 7	24.30	0.269	50.00	-25.70
	16-QAM	26705	815.5	1 / 7	23.15	0.207	50.00	-26.85
		26775	822.5	1 / 7	23.33	0.215	50.00	-26.67
1.4 MHz	QPSK	26697	814.7	1 / 3	23.99	0.251	50.00	-26.01
		26783	823.3	1 / 3	24.14	0.259	50.00	-25.86
	16-QAM	26697	814.7	1 / 3	23.26	0.212	50.00	-26.74
		26783	823.3	1 / 3	23.28	0.213	50.00	-26.72

Table 7-2. Conducted Power Output Data (LTE Band 26 – Ant 0)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]	Conducted Power [Watts]	Conducted Power Limit [dBm]	Margin [dB]
15 MHz	QPSK	26765	821.5	1 / 74	24.46	0.279	50.00	-25.54
	16-QAM	26765	821.5	1 / 74	23.36	0.217	50.00	-26.64
10 MHz	QPSK	26740	819.0	1 / 25	24.58	0.287	50.00	-25.42
	16-QAM	26740	819.0	1 / 25	23.73	0.236	50.00	-26.27
5 MHz	QPSK	26715	816.5	1 / 24	24.44	0.278	50.00	-25.56
		26765	821.5	1 / 12	24.38	0.274	50.00	-25.62
	16-QAM	26715	816.5	1 / 24	23.58	0.228	50.00	-26.42
		26765	821.5	1 / 12	23.53	0.225	50.00	-26.47
3 MHz	QPSK	26705	815.5	1 / 7	24.56	0.286	50.00	-25.44
		26775	822.5	1 / 7	24.27	0.267	50.00	-25.73
	16-QAM	26705	815.5	1 / 7	23.48	0.223	50.00	-26.52
		26775	822.5	1 / 7	23.42	0.220	50.00	-26.58
1.4 MHz	QPSK	26697	814.7	1 / 3	24.26	0.267	50.00	-25.74
		26783	823.3	1 / 5	24.33	0.271	50.00	-25.67
	16-QAM	26697	814.7	1 / 3	23.36	0.217	50.00	-26.64
		26783	823.3	1 / 5	23.53	0.225	50.00	-26.47

Table 7-3. Conducted Power Output Data (LTE Band 26 – Ant 6)

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 12 of 50

### 7.3 Occupied Bandwidth

#### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Procedure Used


ANSI C63.26-2015 – Section 5.4.4

#### Test Settings

1. The signal analyzer’s automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

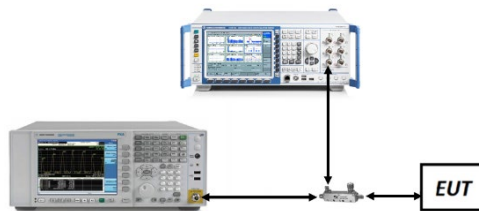

**Figure 7-2. Test Instrument & Measurement Setup**

#### Test Notes

None


FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 13 of 50

Mode	Bandwidth	Modulation	OBW [MHz]
LTE-B26	15 MHz	QPSK	13.51
		16QAM	13.49
	10 MHz	QPSK	9.01
		16QAM	9.00
	5 MHz	QPSK	4.54
		16QAM	4.55
	3 MHz	QPSK	2.72
		16QAM	2.71
	1.4 MHz	QPSK	1.11
		16QAM	1.11


**Table 7-4. Occupied Bandwidth Test Results – Ant 0**

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-06.A3L	<b>Test Dates:</b> 8/23/2023 - 10/18/2023	<b>EUT Type:</b> Portable Handset	Page 14 of 50

## LTE Band 26 – Ant 0

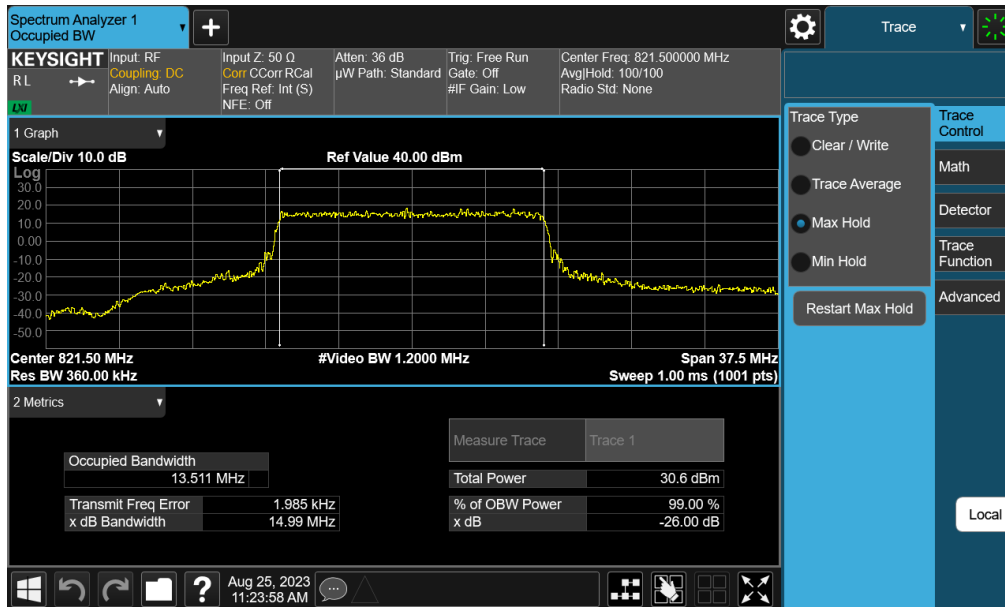


Plot 7-1. Occupied Bandwidth Plot (LTE Band 26 - 15MHz QPSK - Full RB Configuration – Ant 0)

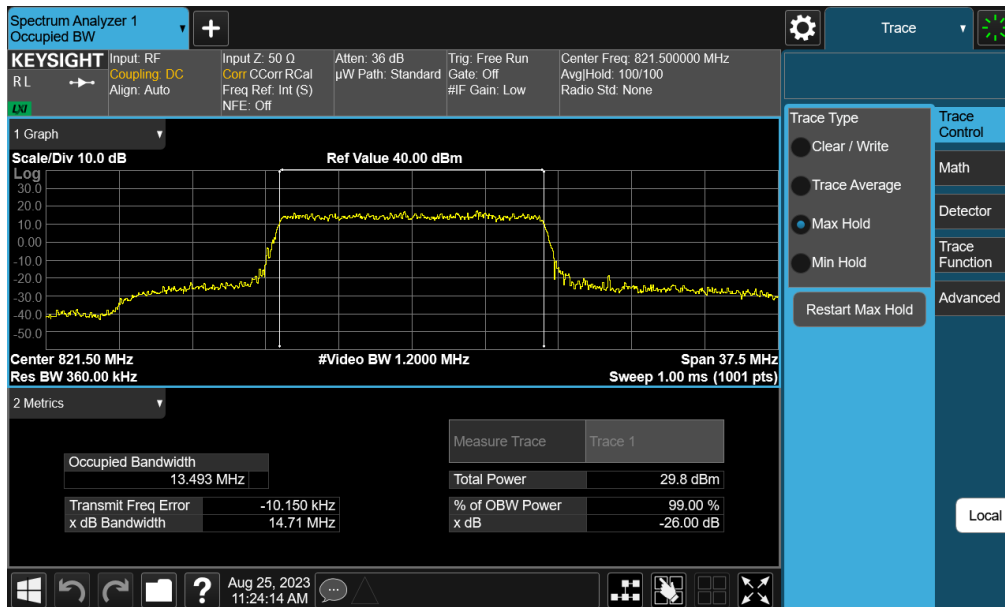


Plot 7-2. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 16-QAM - Full RB Configuration – Ant 0)

FCC ID: A3LSMS928B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 15 of 50	

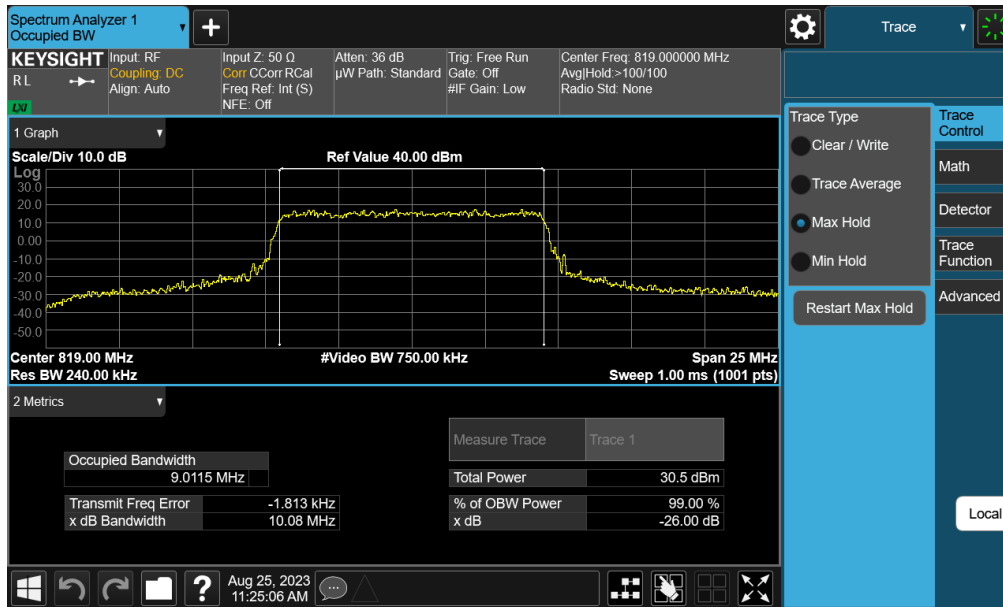


Plot 7-3. Occupied Bandwidth Plot (LTE Band 26 - 10MHz QPSK - Full RB Configuration – Ant 0)

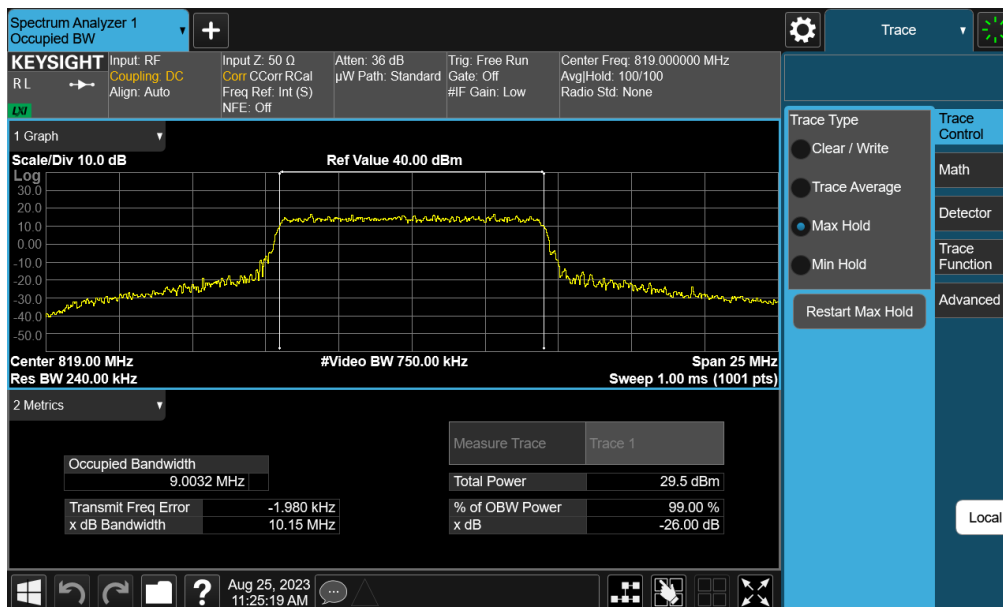


Plot 7-4. Occupied Bandwidth Plot (LTE Band 26 - 10MHz 16-QAM - Full RB Configuration – Ant 0)

FCC ID: A3LSMS928B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset		Page 16 of 50



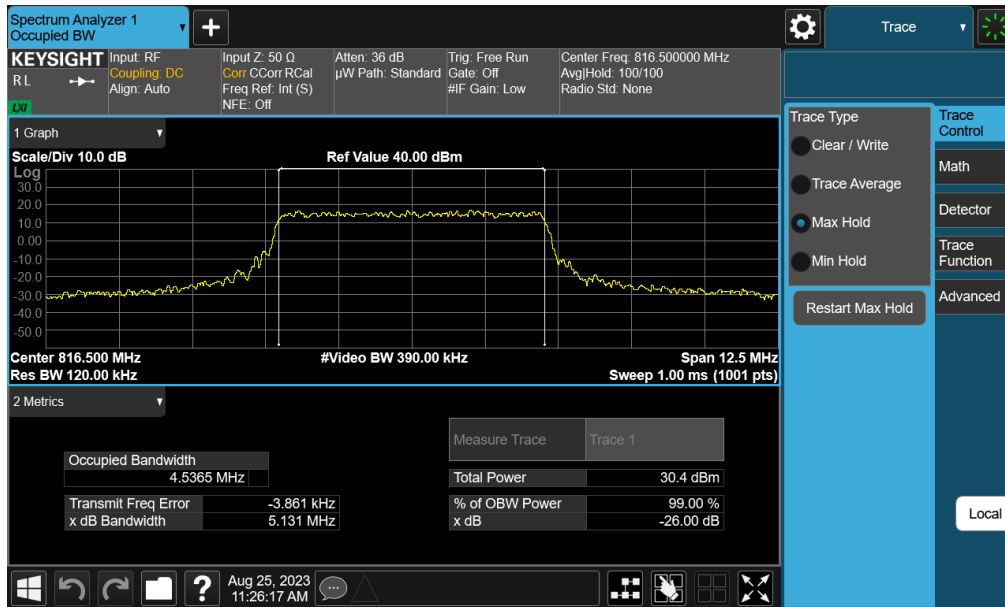


Plot 7-5. Occupied Bandwidth Plot (LTE Band 26 - 5MHz QPSK - Full RB Configuration – Ant 0)

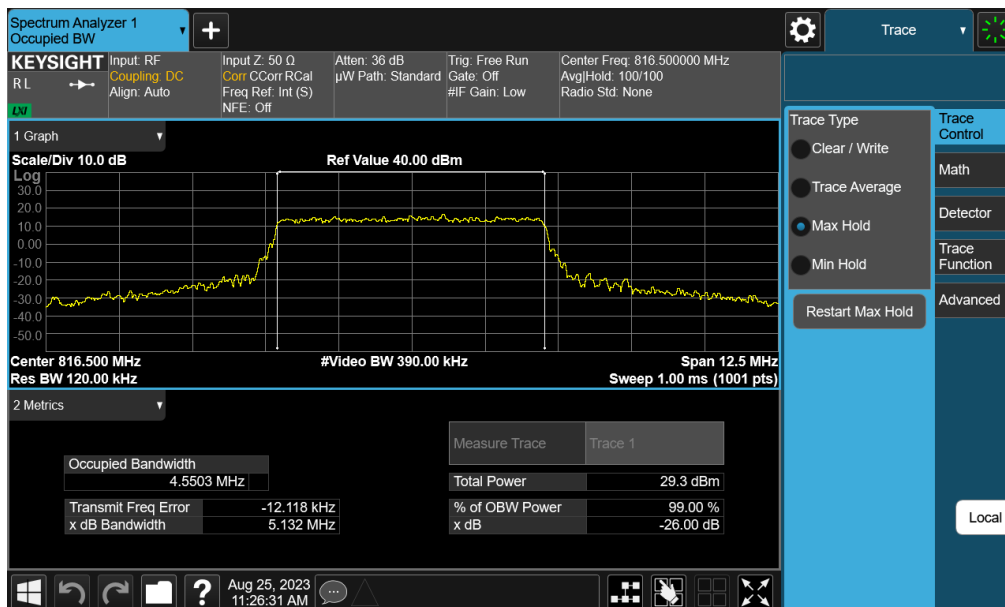


Plot 7-6. Occupied Bandwidth Plot (LTE Band 26 - 5MHz 16-QAM - Full RB Configuration – Ant 0)

FCC ID: A3LSMS928B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset		Page 17 of 50

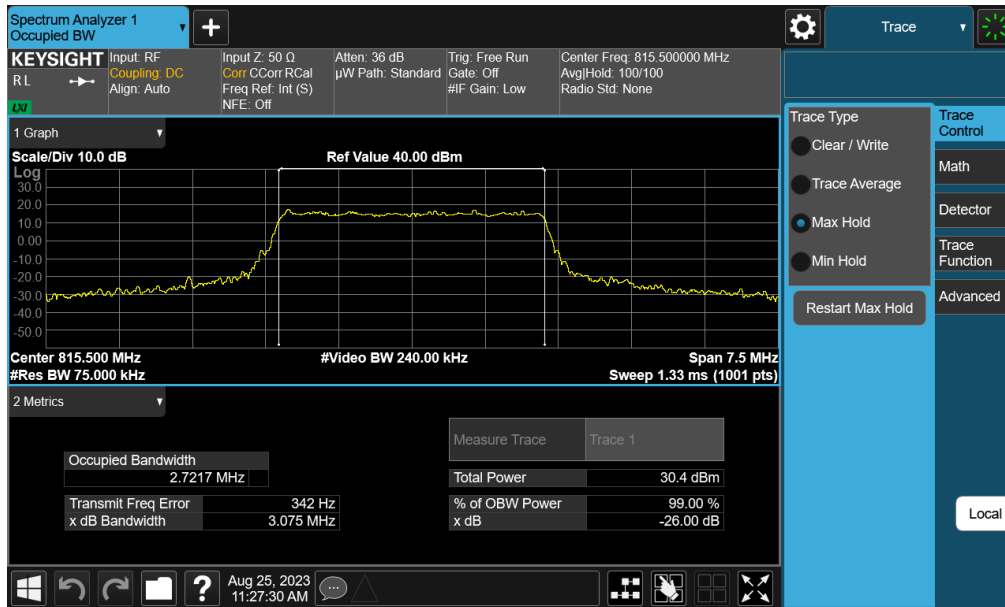


Plot 7-7. Occupied Bandwidth Plot (LTE Band 26 - 3MHz QPSK - Full RB Configuration – Ant 0)

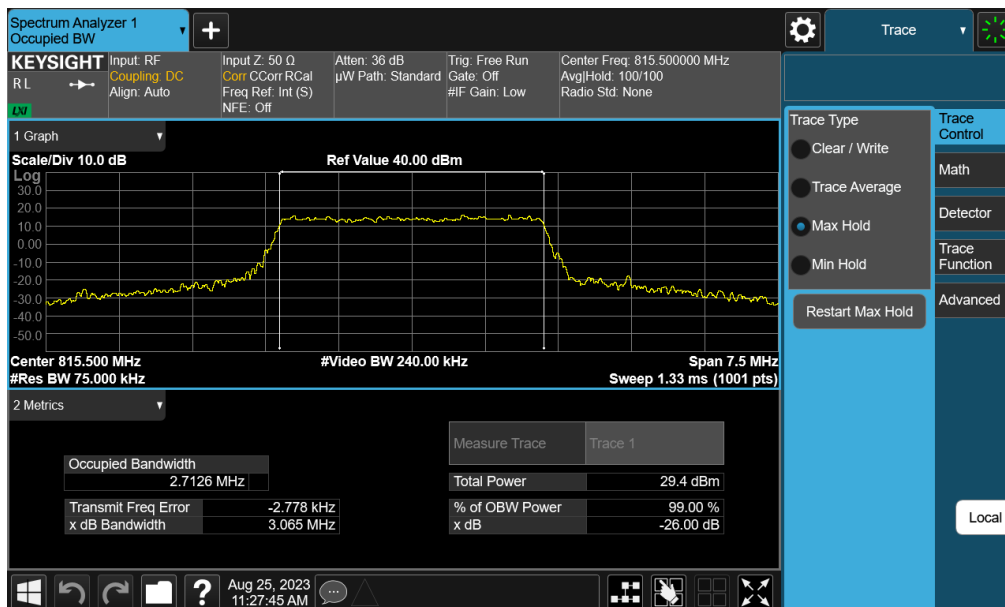


Plot 7-8. Occupied Bandwidth Plot (LTE Band 26 - 3MHz 16-QAM - Full RB Configuration – Ant 0)

FCC ID: A3LSMS928B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 18 of 50	

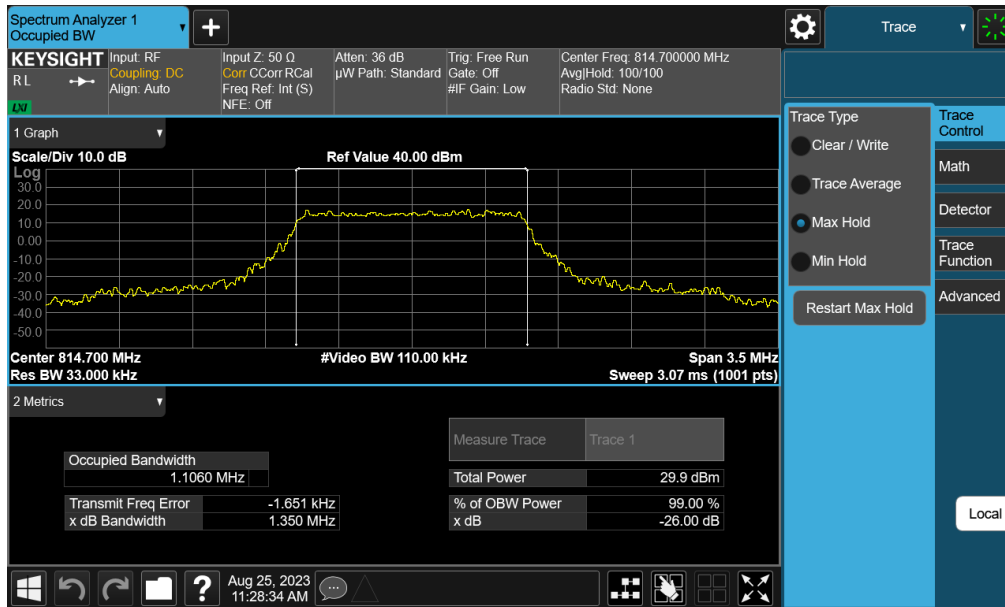

**Plot 7-9. Occupied Bandwidth Plot (LTE Band 26 - 1.4MHz QPSK - Full RB Configuration – Ant 0)**

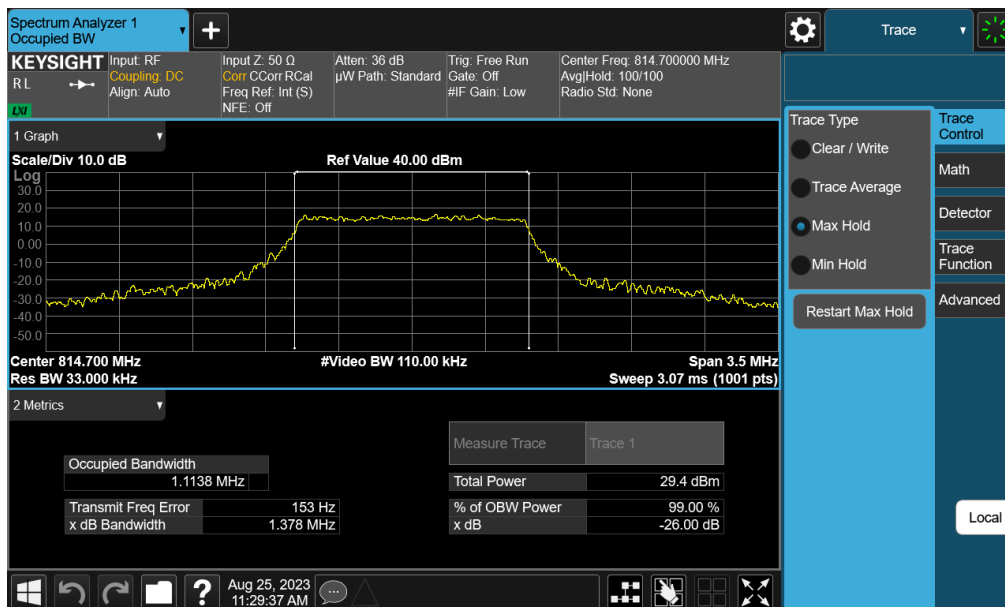

**Plot 7-10. Occupied Bandwidth Plot (LTE Band 26 - 1.4MHz 16-QAM - Full RB Configuration – Ant 0)**


FCC ID: A3LSMS928B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 19 of 50	

Mode	Bandwidth	Modulation	OBW [MHz]
LTE-B26	15 MHz	QPSK	13.54
		16QAM	13.51
	10 MHz	QPSK	9.02
		16QAM	9.04
	5 MHz	QPSK	4.53
		16QAM	4.53
	3 MHz	QPSK	2.72
		16QAM	2.71
	1.4 MHz	QPSK	1.10
		16QAM	1.11


**Table 7-5. Occupied Bandwidth Test Results – Ant 6**

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-06.A3L	<b>Test Dates:</b> 8/23/2023 - 10/18/2023	<b>EUT Type:</b> Portable Handset	Page 20 of 50

## LTE Band 26 – Ant 6

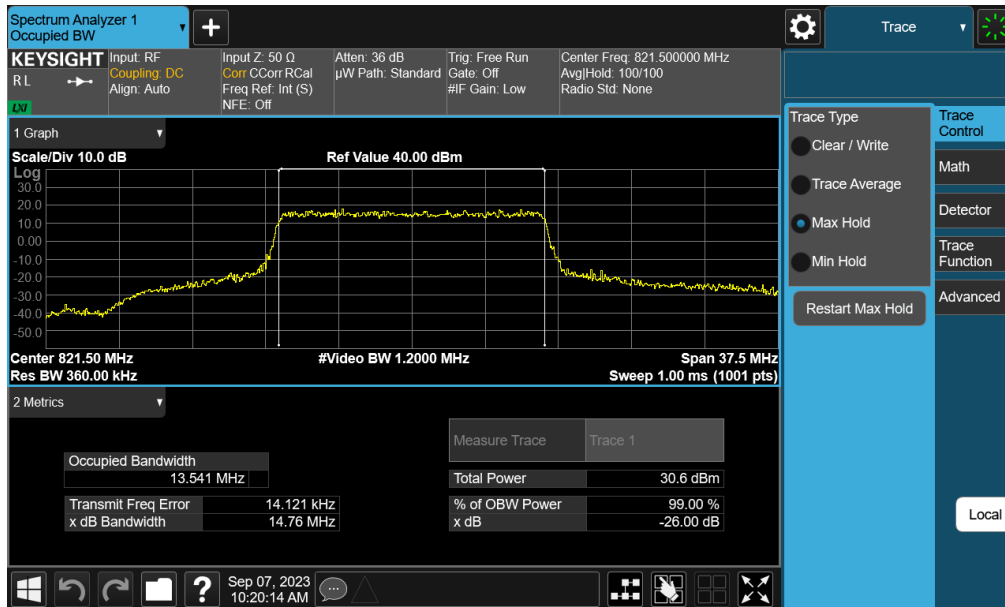


Plot 7-11. Occupied Bandwidth Plot (LTE Band 26 - 15MHz QPSK - Full RB Configuration – Ant 6)

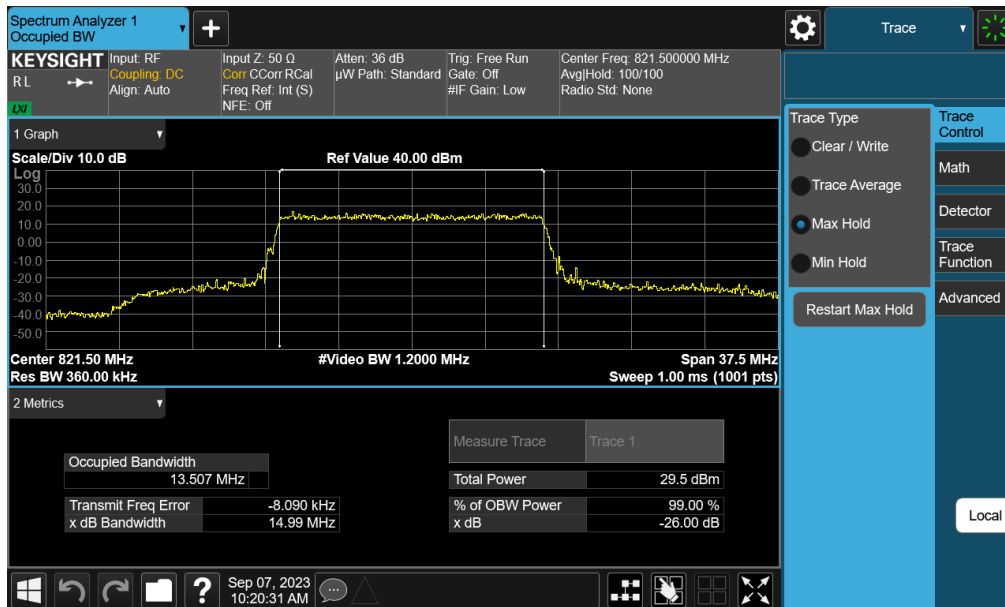


Plot 7-12. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 16-QAM - Full RB Configuration – Ant 6)

FCC ID: A3LSMS928B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset		Page 21 of 50

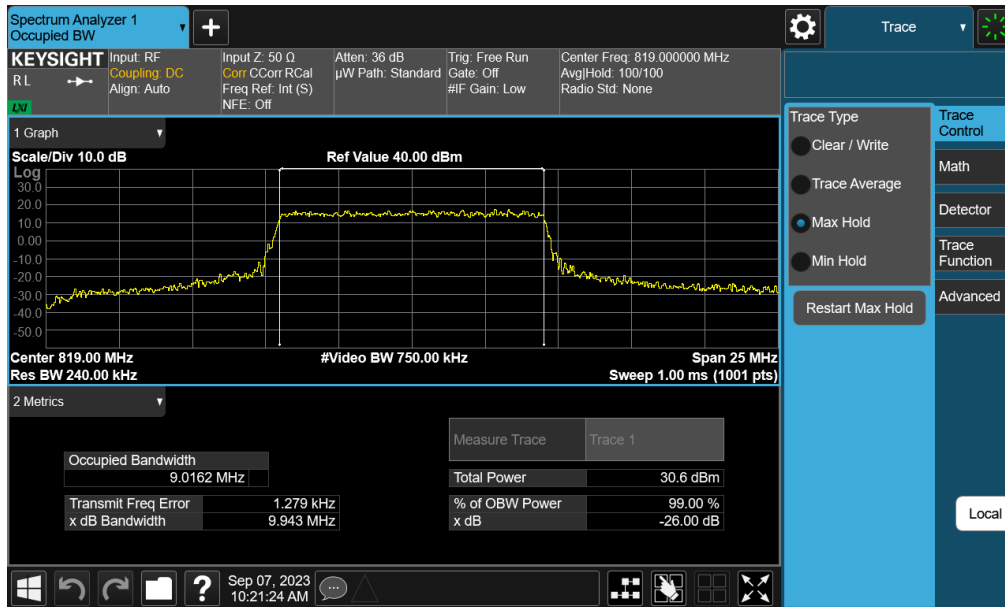


Plot 7-13. Occupied Bandwidth Plot (LTE Band 26 - 10MHz QPSK - Full RB Configuration – Ant 6)

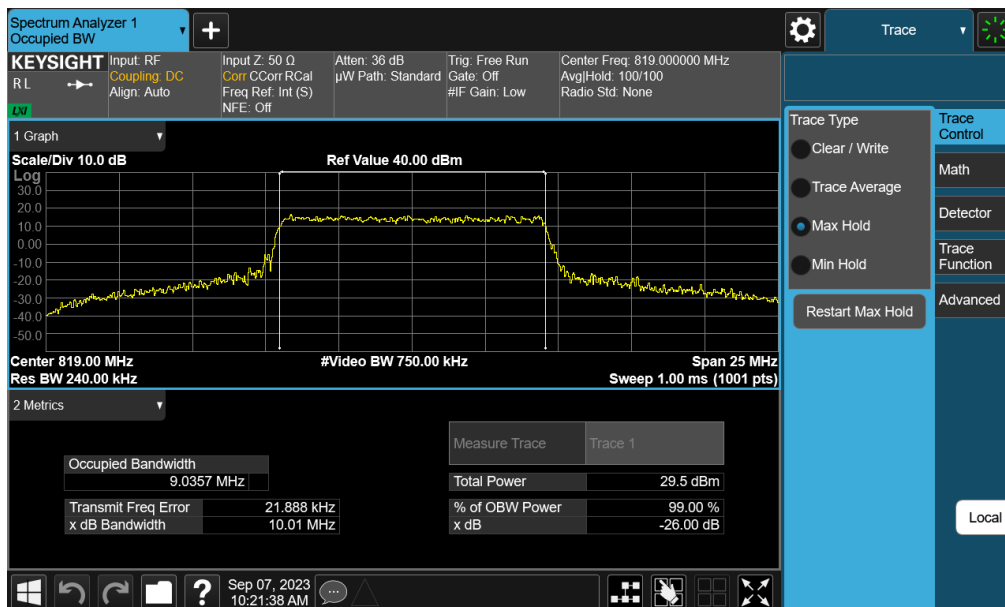


Plot 7-14. Occupied Bandwidth Plot (LTE Band 26 - 10MHz 16-QAM - Full RB Configuration – Ant 6)

FCC ID: A3LSMS928B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset		Page 22 of 50

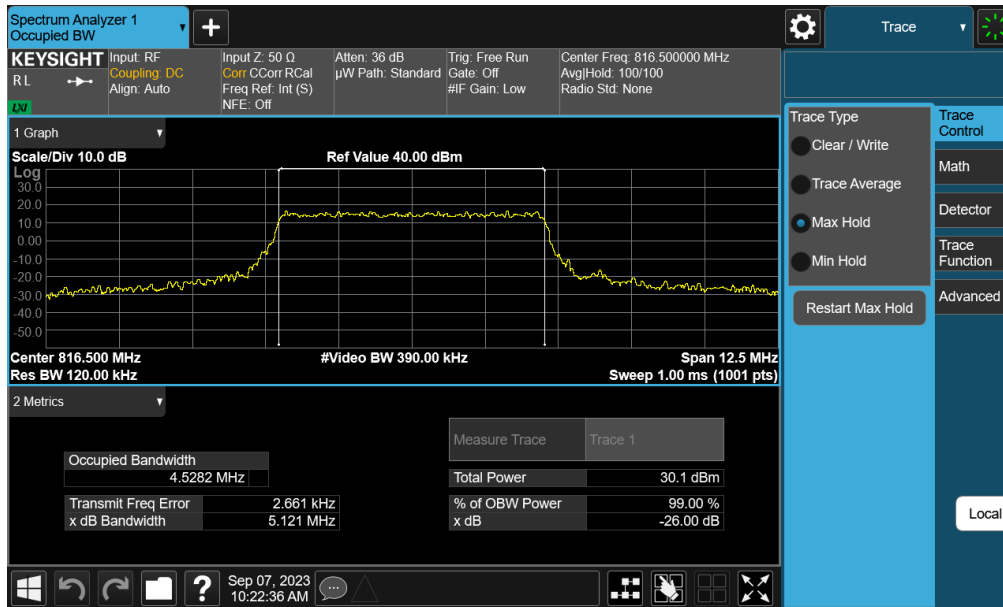


**Plot 7-15. Occupied Bandwidth Plot (LTE Band 26 - 5MHz QPSK - Full RB Configuration – Ant 6)**

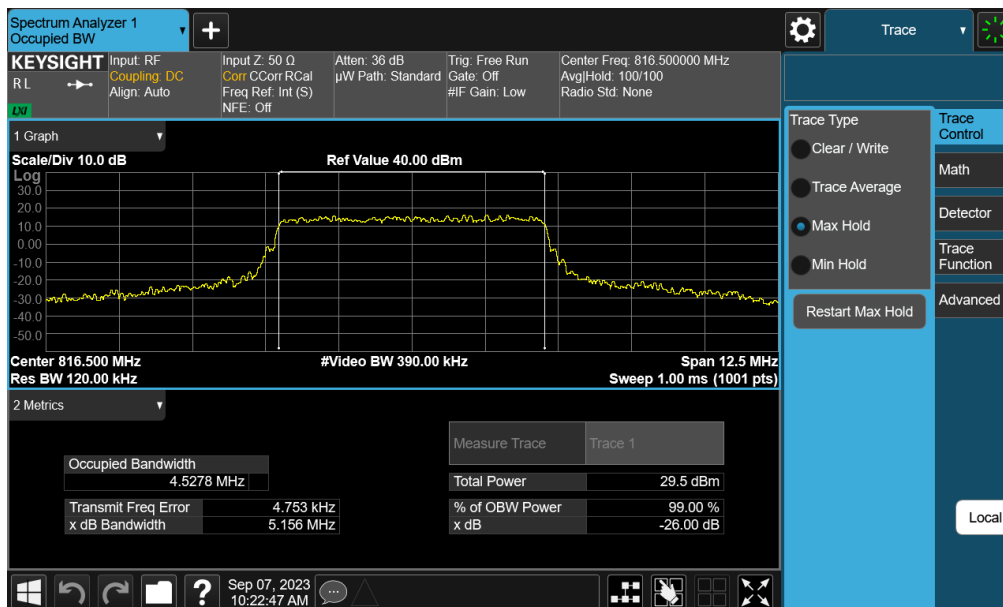


**Plot 7-16. Occupied Bandwidth Plot (LTE Band 26 - 5MHz 16-QAM - Full RB Configuration – Ant 6)**

FCC ID: A3LSMS928B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 23 of 50	

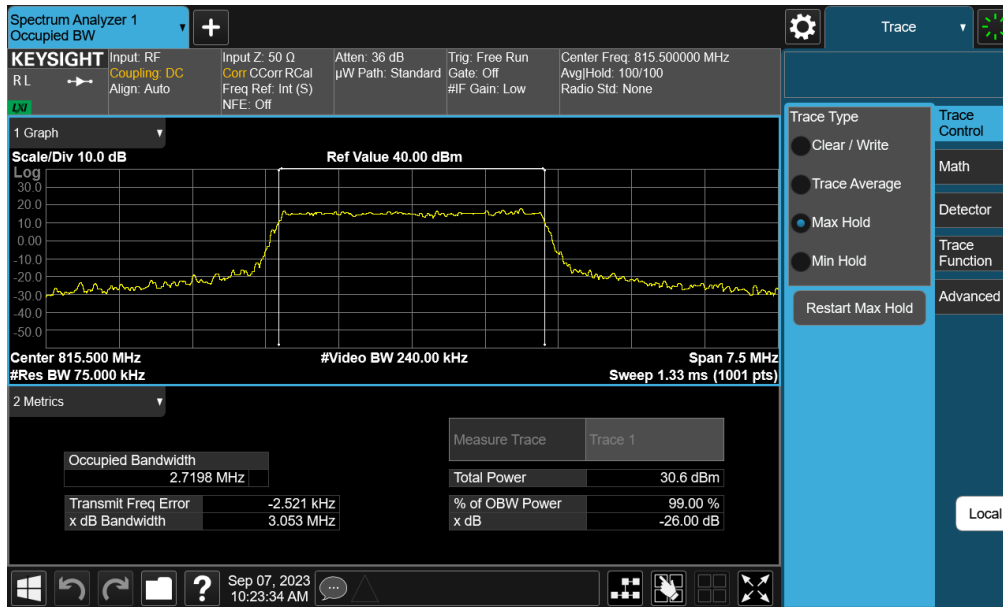


Plot 7-17. Occupied Bandwidth Plot (LTE Band 26 - 3MHz QPSK - Full RB Configuration – Ant 6)

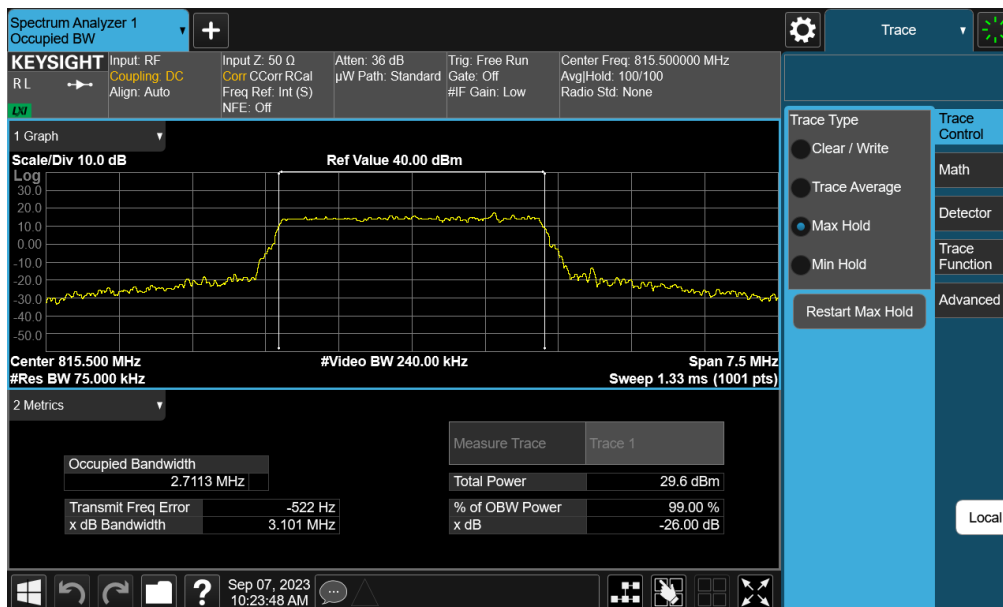


Plot 7-18. Occupied Bandwidth Plot (LTE Band 26 - 3MHz 16-QAM - Full RB Configuration – Ant 6)

FCC ID: A3LSMS928B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset		Page 24 of 50



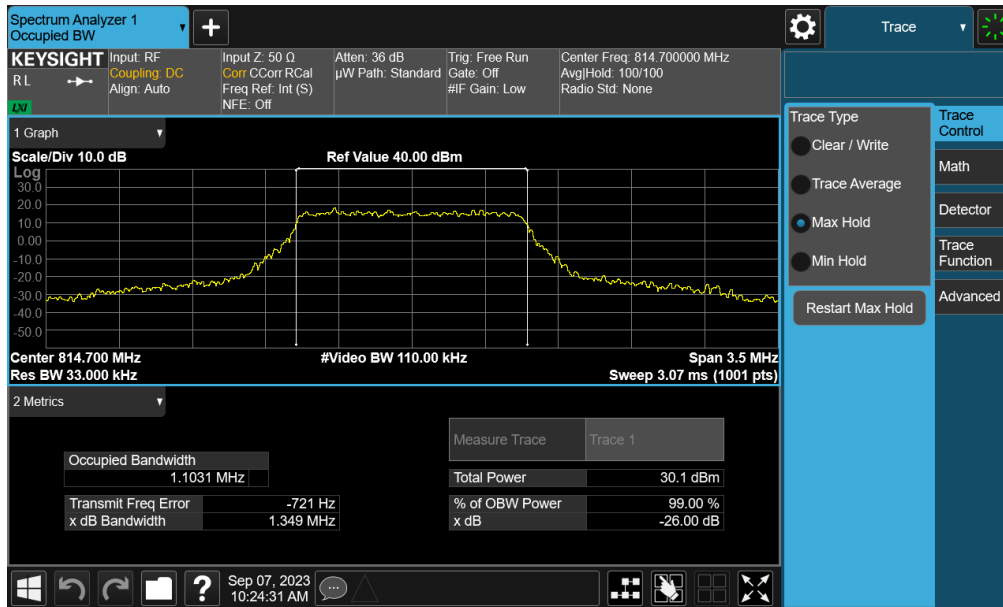

Plot 7-19. Occupied Bandwidth Plot (LTE Band 26 - 1.4MHz QPSK - Full RB Configuration – Ant 6)

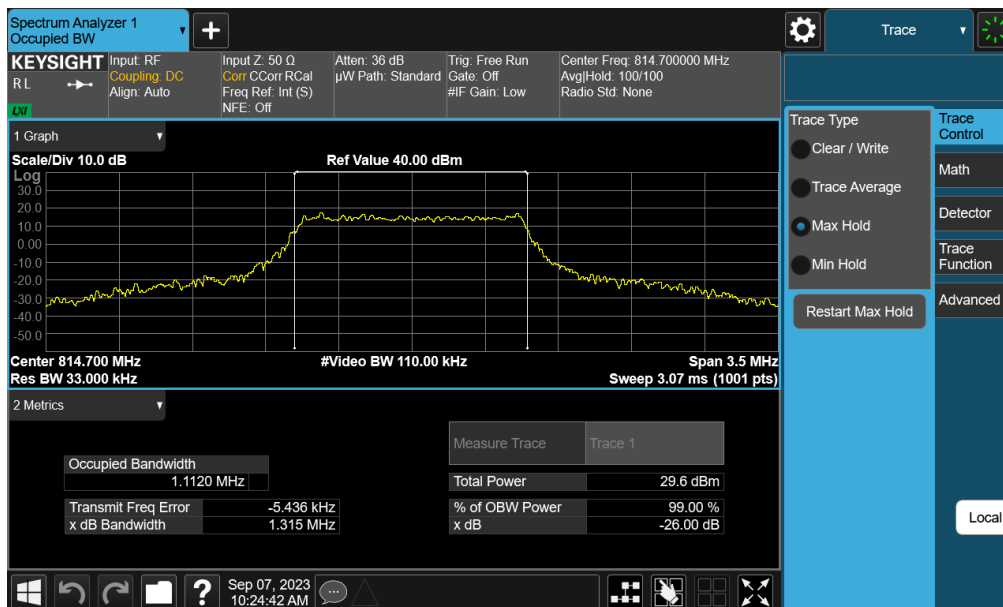

Plot 7-20. Occupied Bandwidth Plot (LTE Band 26 - 1.4MHz 16-QAM - Full RB Configuration – Ant 6)

FCC ID: A3LSMS928B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset		Page 25 of 50

## 7.4 Spurious and Harmonic Emissions at Antenna Terminal

### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

**The minimum permissible attenuation level of any spurious emission is  $43 + 10 \log_{10}(P_{\text{Watts}})$ , where  $P$  is the transmitter power in Watts.**

### Test Procedure Used


ANSI C63.26-2015 – Section 5.7.4

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW  $\geq$  100kHz
3. VBW  $\geq$  3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

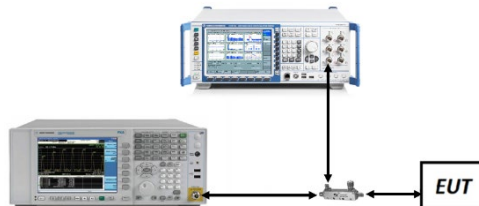

**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes

Per Part 22H and 90, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 26 of 50




Mode	Bandwidth	Channel	Range [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]
LTE-B26	15 MHz	Mid	30.0 - 814.0	-49.09	-13	-36.09
		Mid	824.0 - 1000.0	-31.10	-13	-18.10
		Mid	1000.0 - 10000.0	-40.12	-13	-27.12


**Table 7-6. Conducted Spurious Emission Results – Ant 0**

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-06.A3L	<b>Test Dates:</b> 8/23/2023 - 10/18/2023	<b>EUT Type:</b> Portable Handset	Page 27 of 50

### LTE Band 26 – Ant 0

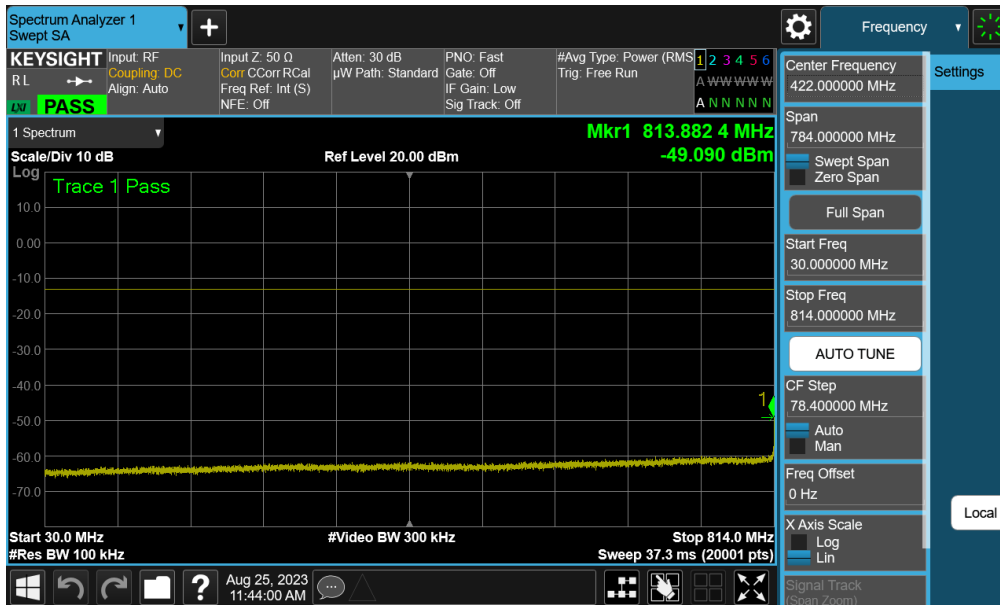


Plot 7-21. Conducted Spurious Plot (LTE Band 26 - 15MHz QPSK - RB Size 1, RB Offset 0 – Ant 0)

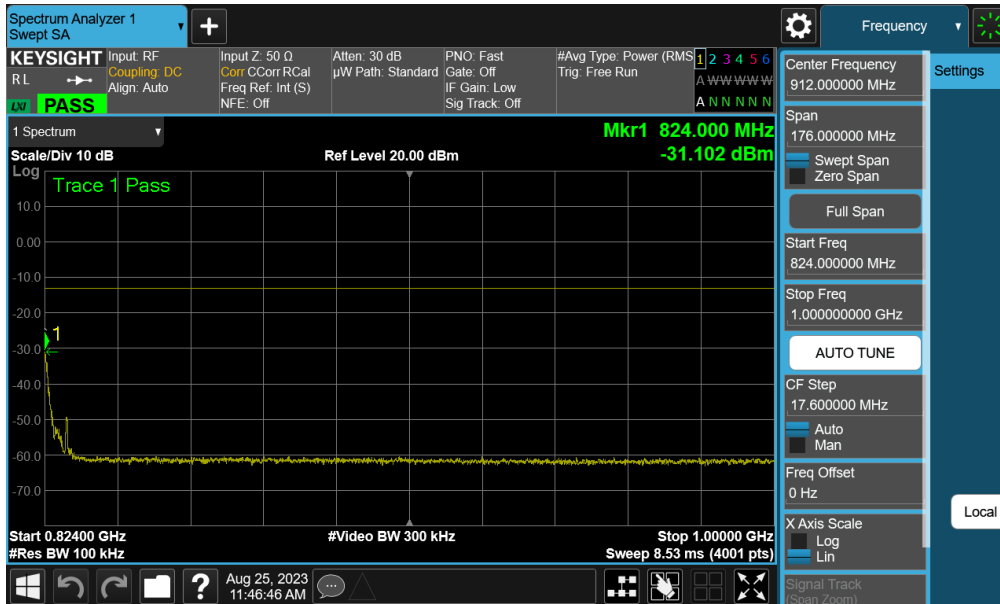

Plot 7-22. Conducted Spurious Plot (LTE Band 26 - 15MHz QPSK - RB Size 1, RB Offset 0 – Ant 0)

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 28 of 50

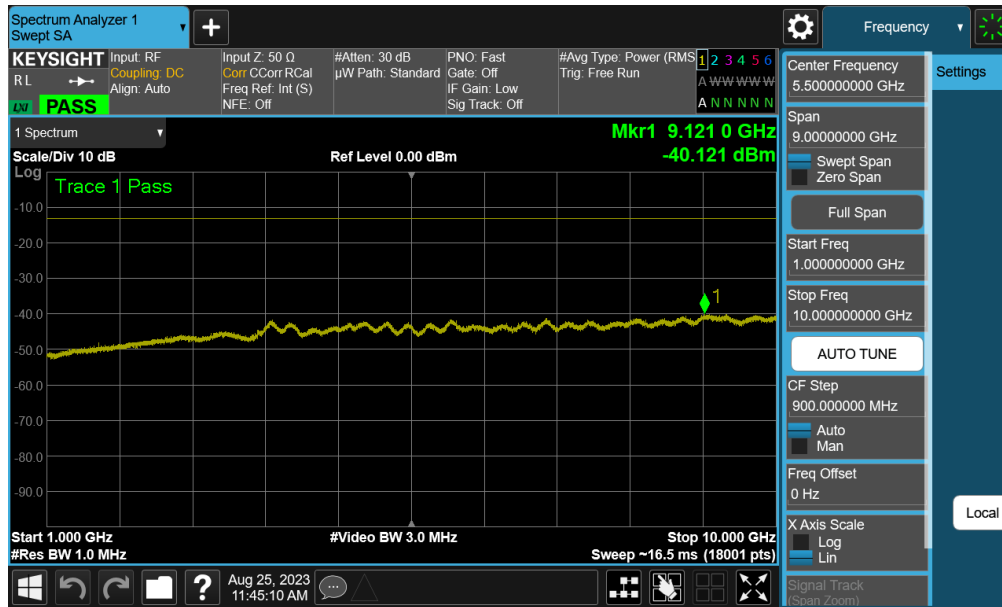

Plot 7-23. Conducted Spurious Plot (LTE Band 26 - 15MHz QPSK - RB Size 1, RB Offset 0 – Ant 0)


FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 29 of 50

Mode	Bandwidth	Channel	Range [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]
LTE-B26	15 MHz	Mid	30.0 - 814.0	-48.65	-13.00	-35.65
		Mid	824.0 - 1000.0	-29.77	-13.00	-16.77
		Mid	1000.0 - 10000.0	-38.90	-13.00	-25.90


**Table 7-7. Conducted Spurious Emission Results – Ant 6**

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-06.A3L	<b>Test Dates:</b> 8/23/2023 - 10/18/2023	<b>EUT Type:</b> Portable Handset	Page 30 of 50

## LTE Band 26 – Ant 6

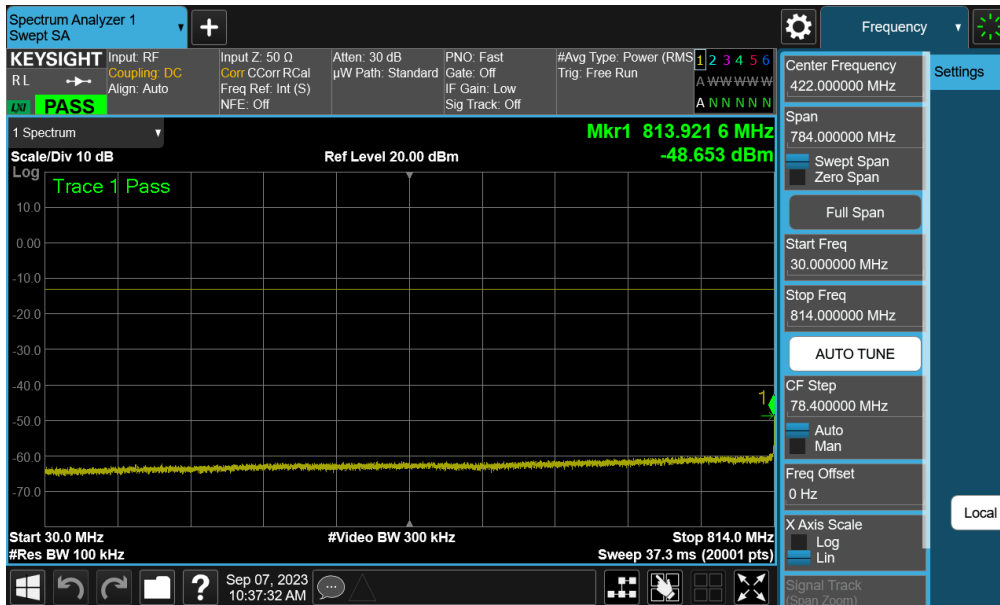


Plot 7-24. Conducted Spurious Plot (LTE Band 26 - 15MHz QPSK - RB Size 1, RB Offset 0 – Ant 6)

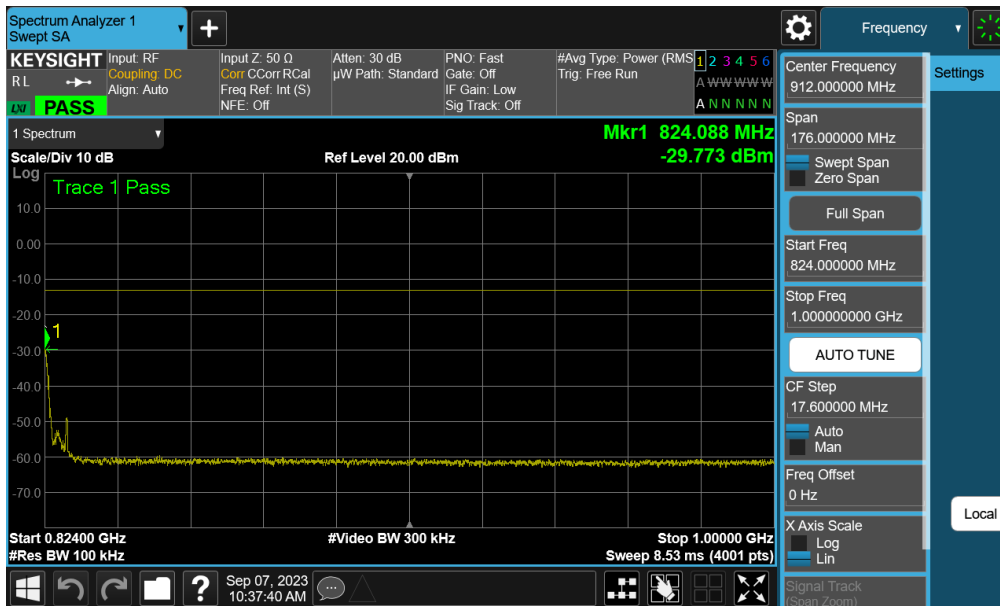

Plot 7-25. Conducted Spurious Plot (LTE Band 26 - 15MHz QPSK - RB Size 1, RB Offset 0 – Ant 6)

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 31 of 50

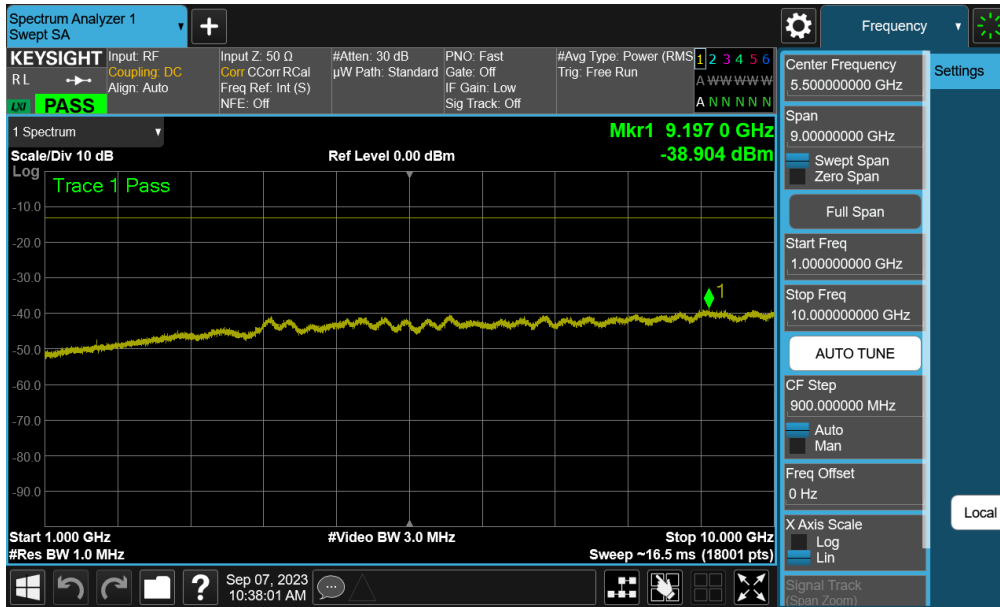

Plot 7-26. Conducted Spurious Plot (LTE Band 26 - 15MHz QPSK - RB Size 1, RB Offset 0 – Ant 6)

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 32 of 50



## 7.5 Band Edge Emissions at Antenna Terminal

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

***For LTE B26 operation under Part 90.691, the minimum permissible attenuation level of any spurious emission removed from the EA licensee’s frequency block by greater than 37.5 kHz is  $43 + 10\log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts. The minimum permissible attenuation level of any spurious emission removed from the EA licensee’s frequency block by up to and including 37.5 kHz is  $50 + 10\log_{10}(P_{[Watts]})$ , where  $P$  is the transmitter power in Watts.***

### Test Procedure Used


ANSI C63.26-2015 – Section 5.7.3

### Test Settings

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = RMS
5. Trace mode = trace average
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

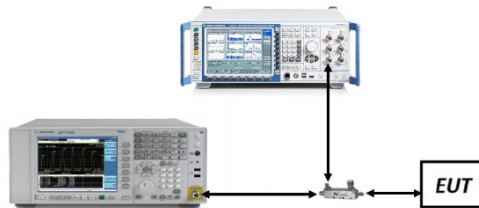

**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes

1. For channel edge emission, the signal analyzer’s “ACP” measurement capability is used.
2. Per 22.917(b) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.


FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 33 of 50

Mode	Bandwidth	Channel	Test Case	Level [dBm]	Limit [dBm]	Margin [dB]
LTE-B26	15 MHz	Mid	Band Edge	-35.34	-20	-15.34
	10 MHz	Mid	Band Edge	-34.64	-20	-14.64
	5 MHz	Low	Band Edge	-27.24	-20	-7.24
		High	Band Edge	-27.41	-20	-7.41
	3 MHz	Low	Band Edge	-24.64	-20	-4.64
		High	Band Edge	-24.26	-20	-4.26
	1.4 MHz	Low	Band Edge	-23.76	-20	-3.76
		High	Band Edge	-23.97	-20	-3.97


**Table 7-8. Band Edge Test Results – Ant 0**

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-06.A3L	<b>Test Dates:</b> 8/23/2023 - 10/18/2023	<b>EUT Type:</b> Portable Handset	Page 34 of 50

# LTE Band 26 – Ant 0

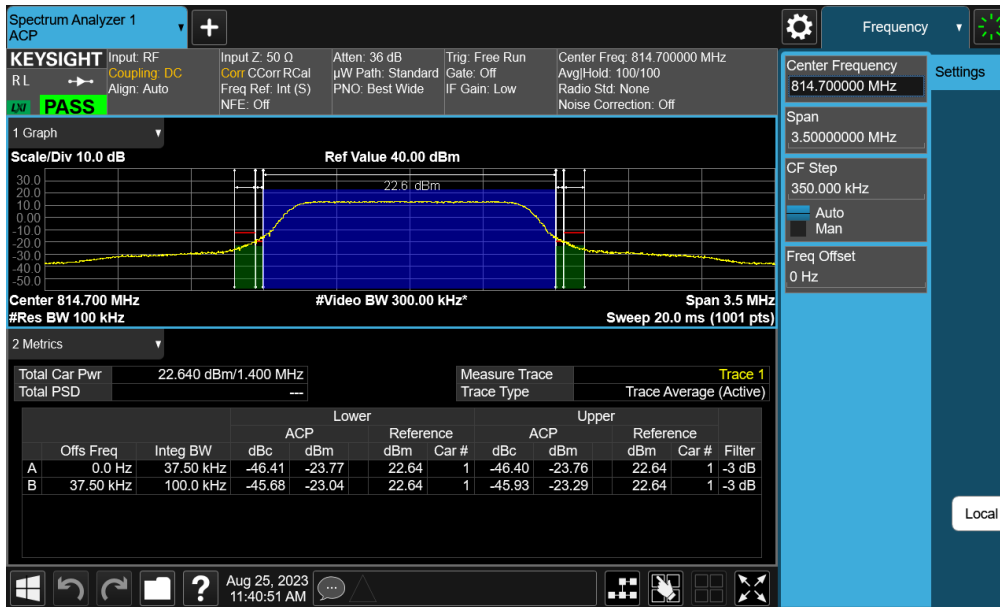

Plot 7-27. Channel Edge Plot (LTE Band 26 - 1.4MHz QPSK - Low Channel – Ant 0)

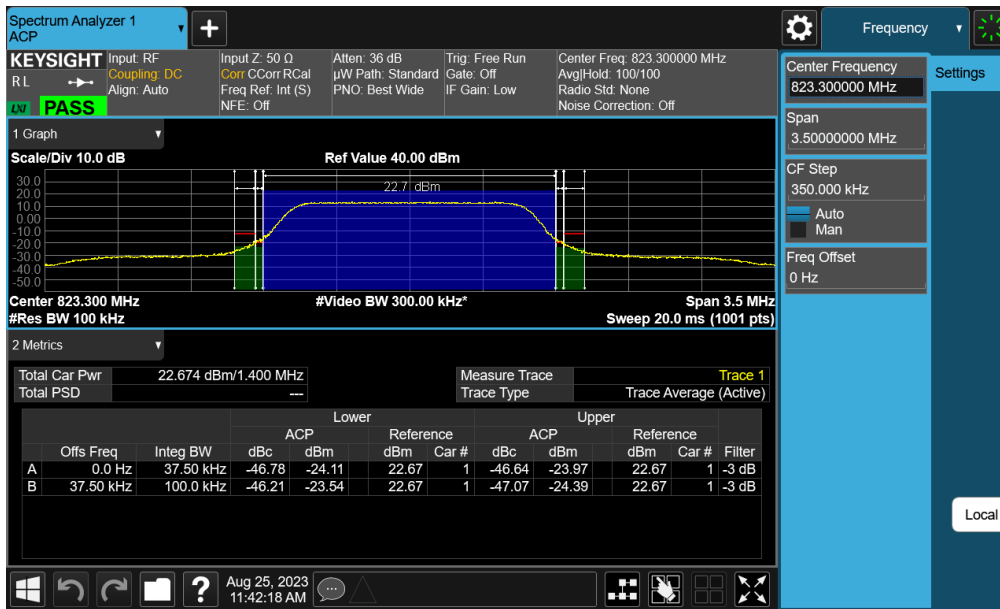

Plot 7-28. Channel Edge Plot (LTE Band 26 - 1.4MHz QPSK - High Channel – Ant 0)



FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 35 of 50

Mode	Bandwidth	Channel	Test Case	Level [dBm]	Limit [dBm]	Margin [dB]
LTE-B26	15 MHz	Mid	Band Edge	-34.53	-20	-14.53
	10 MHz	Mid	Band Edge	-32.49	-20	-12.49
	5 MHz	Low	Band Edge	-27.54	-20	-7.54
		High	Band Edge	-27.68	-20	-7.68
	3 MHz	Low	Band Edge	-24.18	-20	-4.18
		High	Band Edge	-24.58	-20	-4.58
	1.4 MHz	Low	Band Edge	-22.91	-20	-2.91
		High	Band Edge	-24.17	-20	-4.17

**Table 7-9. Band Edge Test Results – Ant 6**

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-06.A3L	<b>Test Dates:</b> 8/23/2023 - 10/18/2023	<b>EUT Type:</b> Portable Handset	Page 36 of 50

## LTE Band 26 – Ant 6

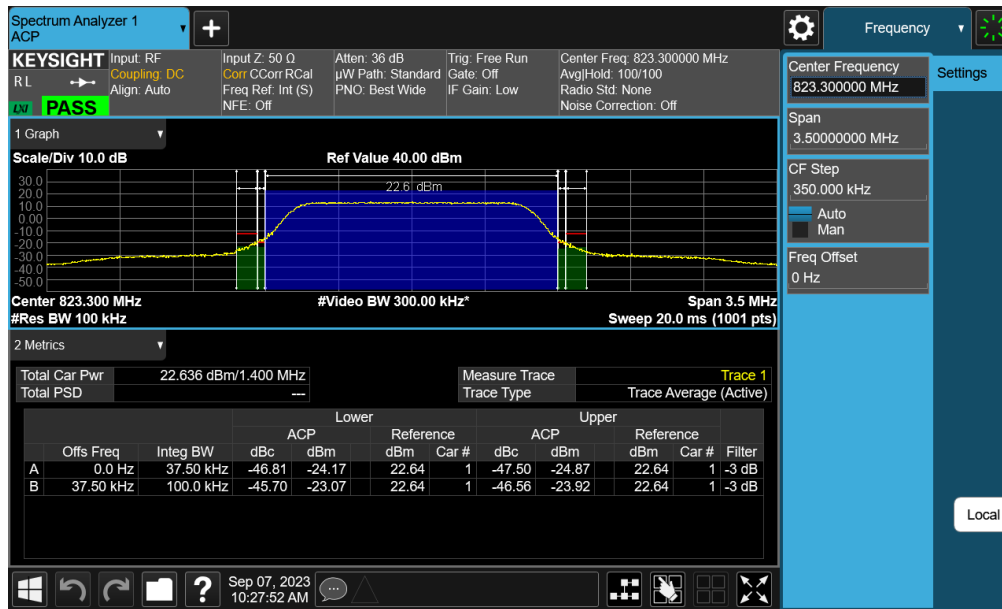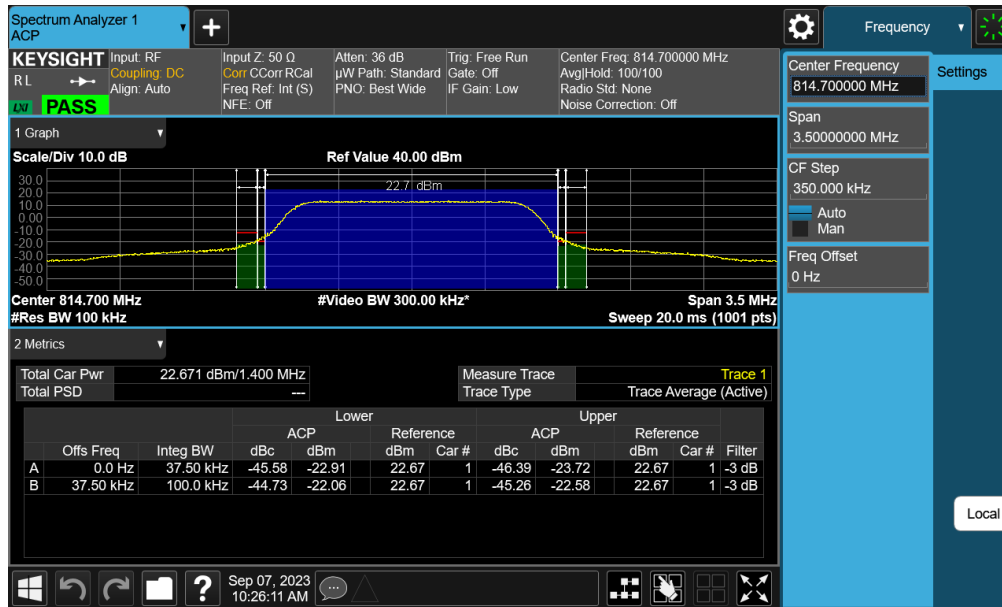

FCC ID: A3LSMS928B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset		Page 37 of 50

## 7.6 Radiated Power (ERP)

### Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

ANSI C63.26-2015 – Section 5.2.4.4


### Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $\geq$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”.
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize.


FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 38 of 50

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

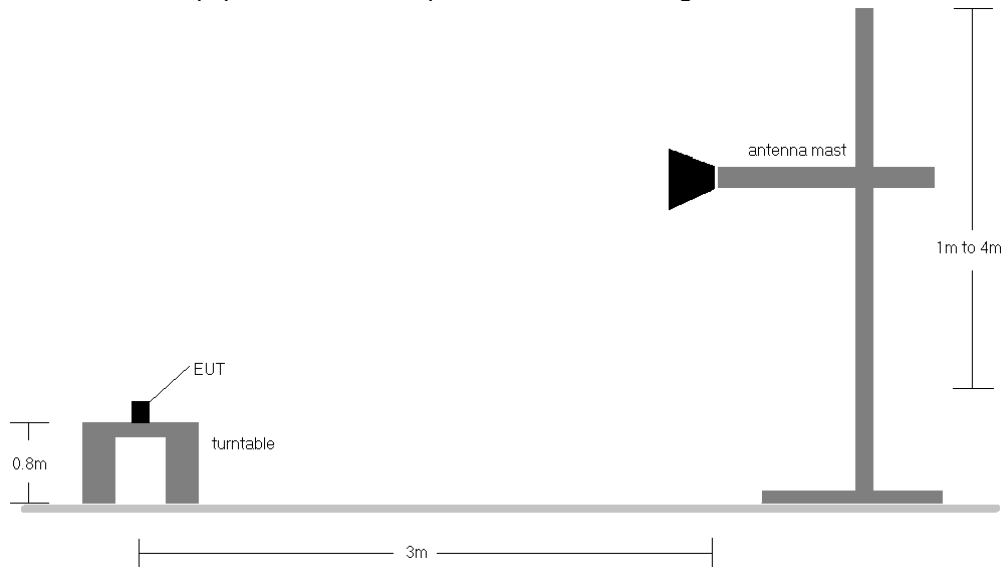

**Figure 7-5. Radiated Test Setup <1GHz**

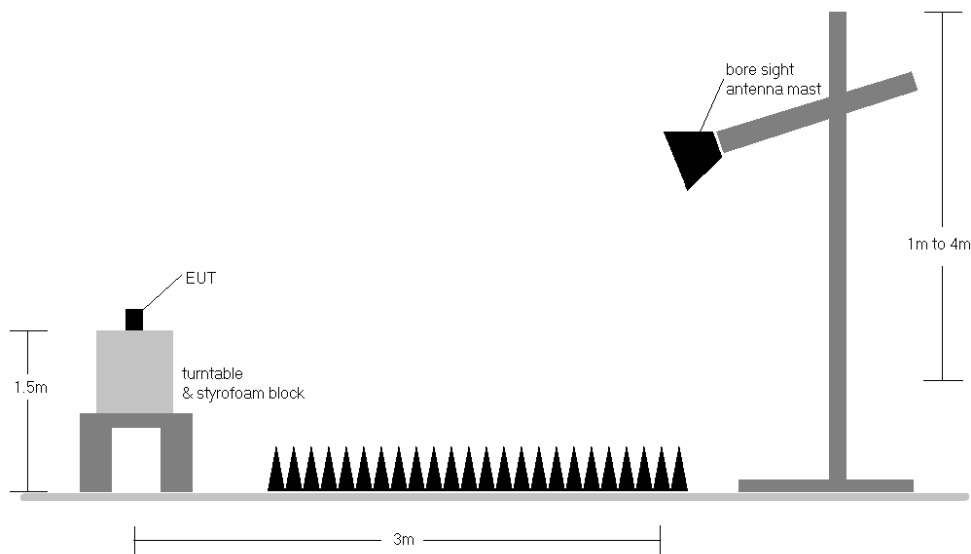

**Figure 7-6. Radiated Test Setup > 1GHz**

## Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 39 of 50



Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
15 MHz	QPSK	821.50	V	153	108	1.24	1 / 0	19.13	18.22	0.066	38.45	-20.23	20.37	0.109	40.61	-20.24
	16-QAM	821.50	V	153	108	1.24	1 / 0	18.19	17.28	0.053	38.45	-21.17	19.43	0.088	40.61	-21.18
10 MHz	QPSK	819.00	V	153	108	1.23	1 / 25	19.35	18.43	0.070	38.45	-20.02	20.58	0.114	40.61	-20.03
	16-QAM	819.00	V	153	108	1.23	1 / 25	18.21	17.29	0.054	38.45	-21.16	19.44	0.088	40.61	-21.17
5 MHz	QPSK	816.50	V	153	108	1.21	1 / 12	19.14	18.20	0.066	38.45	-20.26	20.35	0.108	40.61	-20.26
	16-QAM	821.50	V	153	108	1.24	1 / 12	18.10	17.19	0.052	38.45	-21.26	19.34	0.086	40.61	-21.27
3 MHz	QPSK	815.50	V	153	108	1.21	1 / 7	19.21	18.27	0.067	38.45	-20.18	20.42	0.110	40.61	-20.18
	QPSK	822.50	V	153	108	1.24	1 / 7	19.28	18.37	0.069	38.45	-20.08	20.52	0.113	40.61	-20.08
	16-QAM	822.50	V	153	108	1.24	1 / 7	18.18	17.27	0.053	38.45	-21.18	19.42	0.087	40.61	-21.19
1.4 MHz	QPSK	814.70	V	153	108	1.20	1 / 3	19.01	18.06	0.064	38.45	-20.39	20.21	0.105	40.61	-20.40
	QPSK	823.30	V	153	108	1.25	1 / 3	19.11	18.21	0.066	38.45	-20.24	20.36	0.109	40.61	-20.25
	16-QAM	823.30	V	153	108	1.25	1 / 3	18.12	17.22	0.053	38.45	-21.23	19.37	0.087	40.61	-21.23
15 MHz	QPSK (Opposite Pol.)	816.50	H	115	72	1.24	1 / 74	18.44	17.53	0.057	38.45	-20.92	19.68	0.093	40.61	-20.93
	QPSK (WCP)	821.50	V	148	103	1.24	1 / 74	14.71	13.80	0.024	38.45	-24.65	15.95	0.039	40.61	-24.66

Table 7-31. ERP Data (LTE Band 26 – Ant 0)

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
15 MHz	QPSK	821.50	V	137	254	1.24	1 / 74	25.43	24.52	0.283	38.45	-13.93	26.67	0.464	40.61	-13.94
	16-QAM	821.50	V	137	254	1.24	1 / 74	24.47	23.56	0.227	38.45	-14.89	25.71	0.372	40.61	-14.90
10 MHz	QPSK	819.00	V	137	254	1.23	1 / 25	25.66	24.63	0.291	38.45	-13.82	26.78	0.477	40.61	-13.82
	16-QAM	819.00	V	137	254	1.23	1 / 25	24.85	23.93	0.247	38.45	-14.52	26.08	0.405	40.61	-14.53
5 MHz	QPSK	816.50	V	137	254	1.21	1 / 24	25.43	24.50	0.282	38.45	-13.96	26.65	0.462	40.61	-13.96
	16-QAM	816.50	V	137	254	1.21	1 / 24	24.71	23.78	0.239	38.45	-14.67	25.93	0.392	40.61	-14.68
3 MHz	QPSK	815.50	V	137	254	1.21	1 / 7	25.56	24.62	0.290	38.45	-13.83	26.77	0.475	40.61	-13.84
	QPSK	822.50	V	137	254	1.24	1 / 7	25.23	24.32	0.270	38.45	-14.13	26.47	0.444	40.61	-14.14
	16-QAM	815.50	V	137	254	1.21	1 / 7	24.62	23.68	0.233	38.45	-14.77	25.83	0.383	40.61	-14.78
1.4 MHz	QPSK	814.70	V	137	254	1.20	1 / 3	25.26	24.32	0.270	38.45	-14.13	26.47	0.443	40.61	-14.14
	QPSK	823.30	V	137	254	1.25	1 / 5	25.29	24.39	0.275	38.45	-14.06	26.54	0.451	40.61	-14.07
	16-QAM	823.30	V	137	254	1.25	1 / 5	24.64	23.73	0.236	38.45	-14.72	25.88	0.387	40.61	-14.72
15 MHz	QPSK (Opposite Pol.)	816.50	H	221	63	1.24	1 / 74	22.84	21.93	0.156	38.45	-16.52	24.08	0.256	40.61	-16.53
	QPSK (WCP)	821.50	V	137	232	1.24	1 / 74	23.19	22.28	0.169	38.45	-16.17	24.43	0.277	40.61	-16.18

Table 7-32. ERP Data (LTE Band 26 – Ant 6)

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 40 of 50



## 7.7 Radiated Spurious Emissions Measurements

### Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using hybrid (biconical/log) antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

### Test Procedures Used

ANSI C63.26-2015 – Section 5.5.4


### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize


FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 41 of 50

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

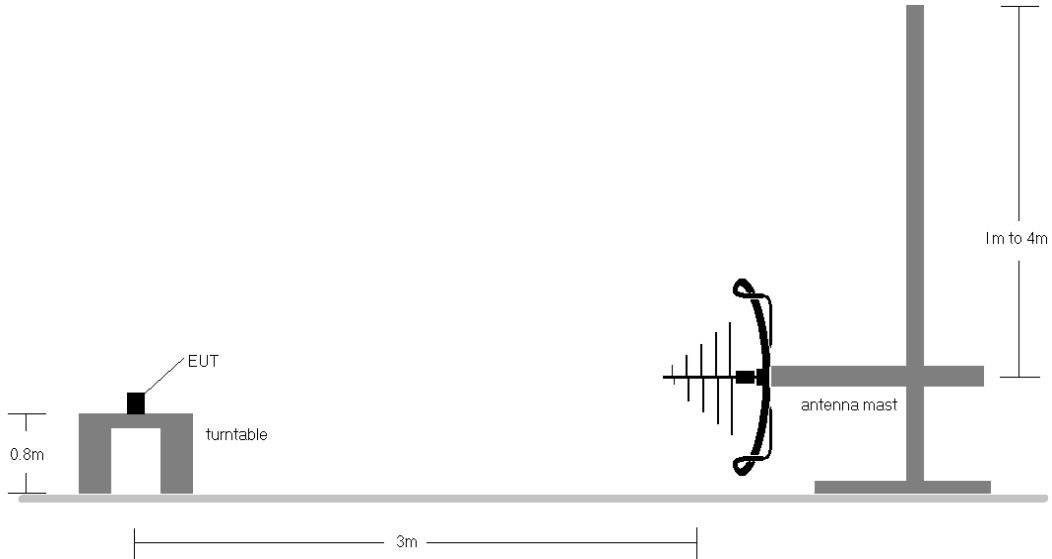

**Figure 7-7. Test Instrument & Measurement Setup < 1GHz**

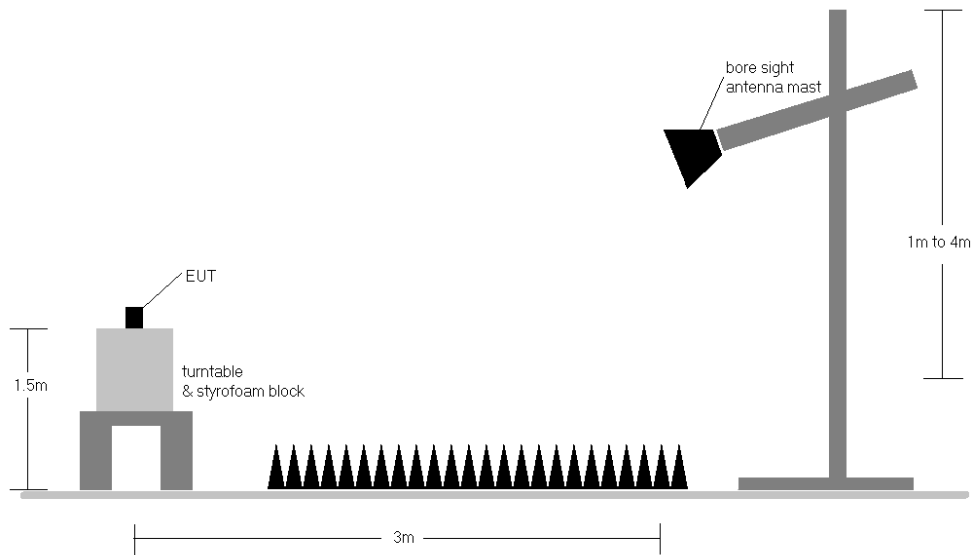

**Figure 7-8. Test Instrument & Measurement Setup >1 GHz**

<b>FCC ID:</b> A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2308210093-06.A3L	<b>Test Dates:</b> 8/23/2023 - 10/18/2023	<b>EUT Type:</b> Portable Handset	Page 42 of 50

**Test Notes**

- 1) Field strengths are calculated using the Measurement quantity conversions in ANSI C63.26-2015 Section 5.2.7:
  - a)  $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
  - b)  $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$ ; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested with its standard battery.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
- 6) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2308210093-06.A3L	Test Dates: 8/23/2023 - 10/18/2023	EUT Type: Portable Handset	Page 43 of 50