

## 7.4 Band Edge Compliance

§15.247 (d); RSS-247 [5.5]

### Test Overview and Limits

EUT operates in hopping and non-hopping transmission mode. Measurement is taken at the highest point located outside of the emission bandwidth. **The maximum permissible out-of-band emission level is 20 dBc.**

### Test Procedure Used

ANSI C63.10-2013 – Section 6.10.4

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 300kHz
5. Detector = Peak
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

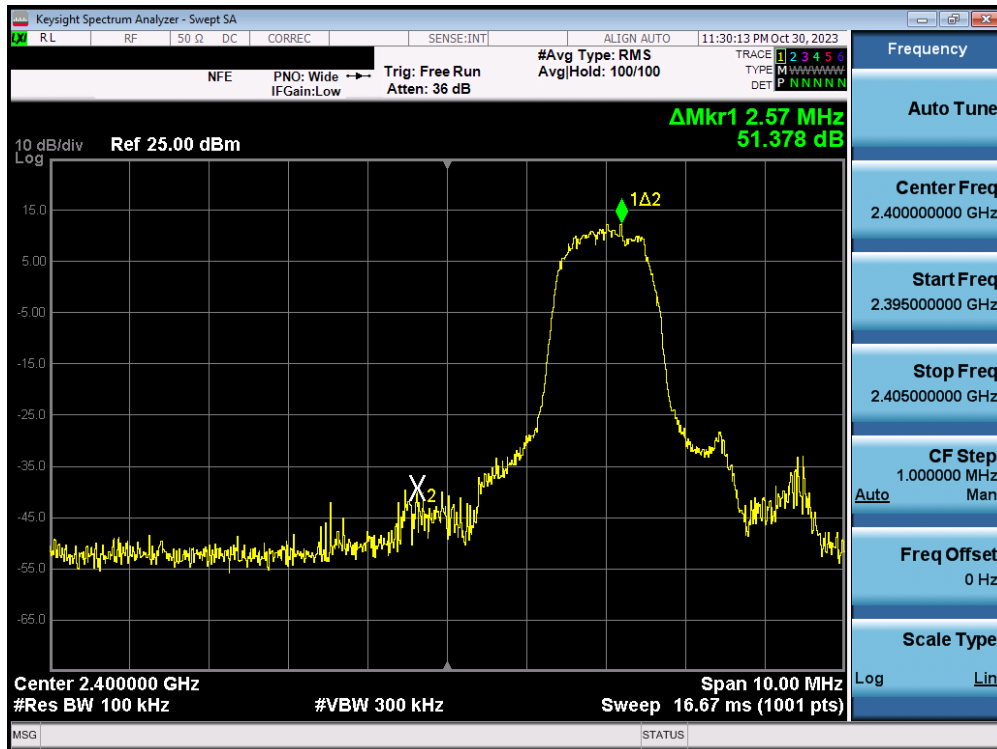


Figure 7-3. Test Instrument & Measurement Setup


### Test Notes

Out of band conducted spurious emissions at the band edge were investigated for all data rates in hopping and non-hopping modes. The worst case emissions were found with the EUT transmitting at 3 Mbps. Band edge emissions were also investigated with the EUT transmitting in all data rates. Plots of the worst case emissions are shown below.

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 73 of 138




Plot 7-109. Band Edge Plot (Bluetooth with Hopping Disabled, 3 Mbps – Ch. 0) – ANT1

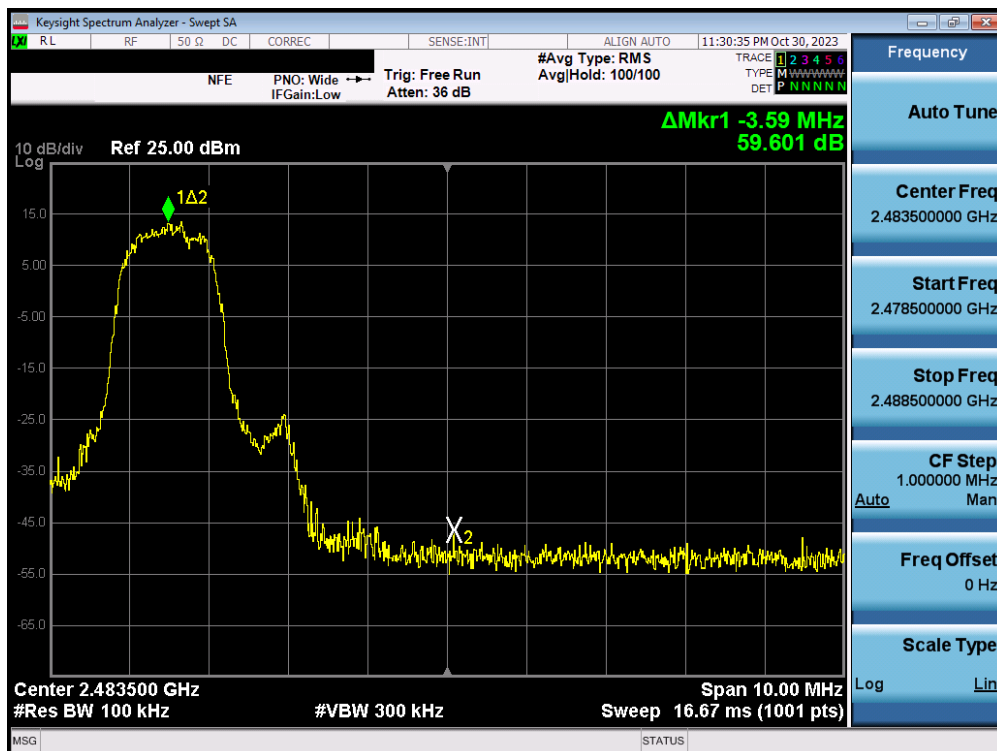


Plot 7-110. Band Edge Plot (Bluetooth with Hopping Disabled, 3 Mbps – Ch. 78) – ANT1

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07-A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 74 of 138



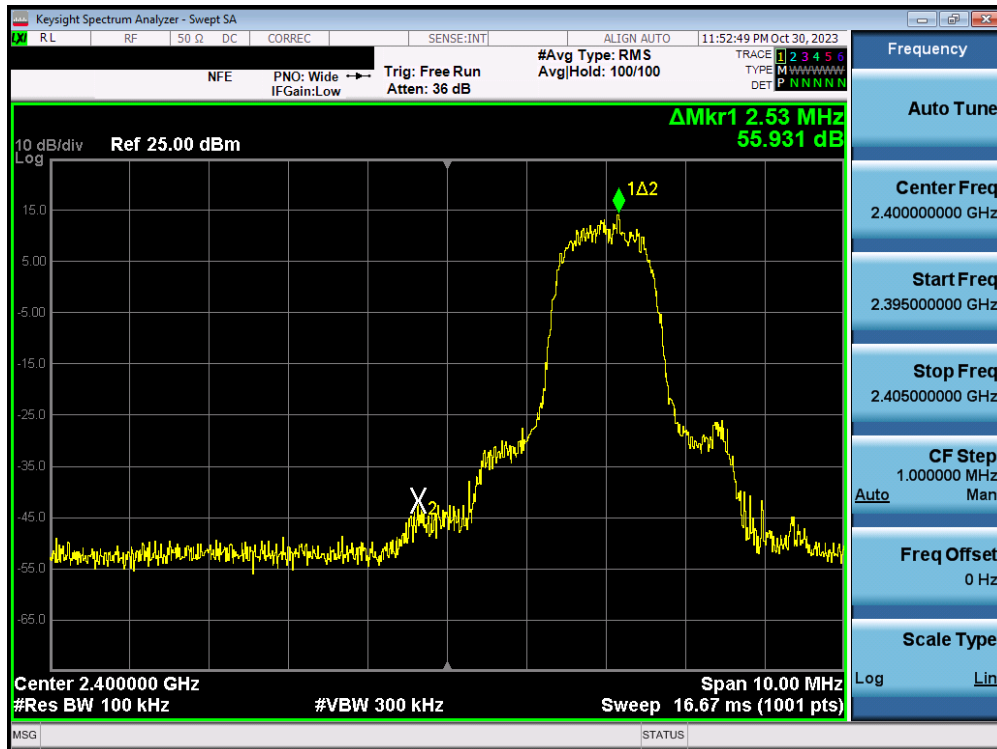


Plot 7-113. Band Edge Plot (Bluetooth with Hopping Disabled, 3 Mbps – Ch. 0) – ANT2

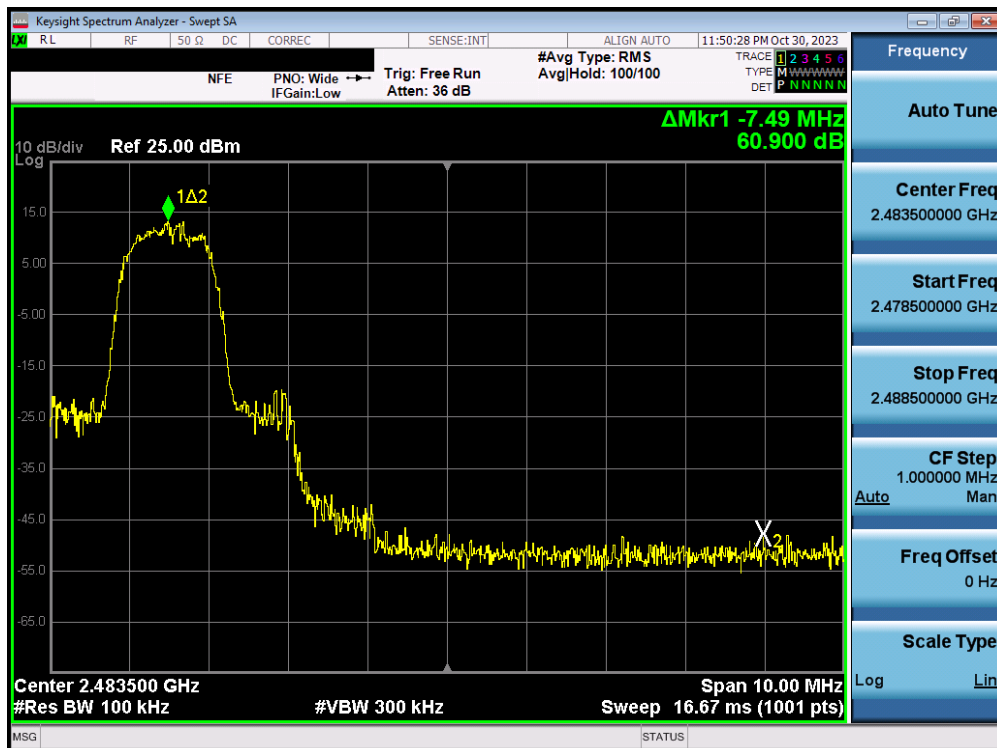


Plot 7-114. Band Edge Plot (Bluetooth with Hopping Disabled, 3 Mbps – Ch. 78) – ANT2

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 76 of 138

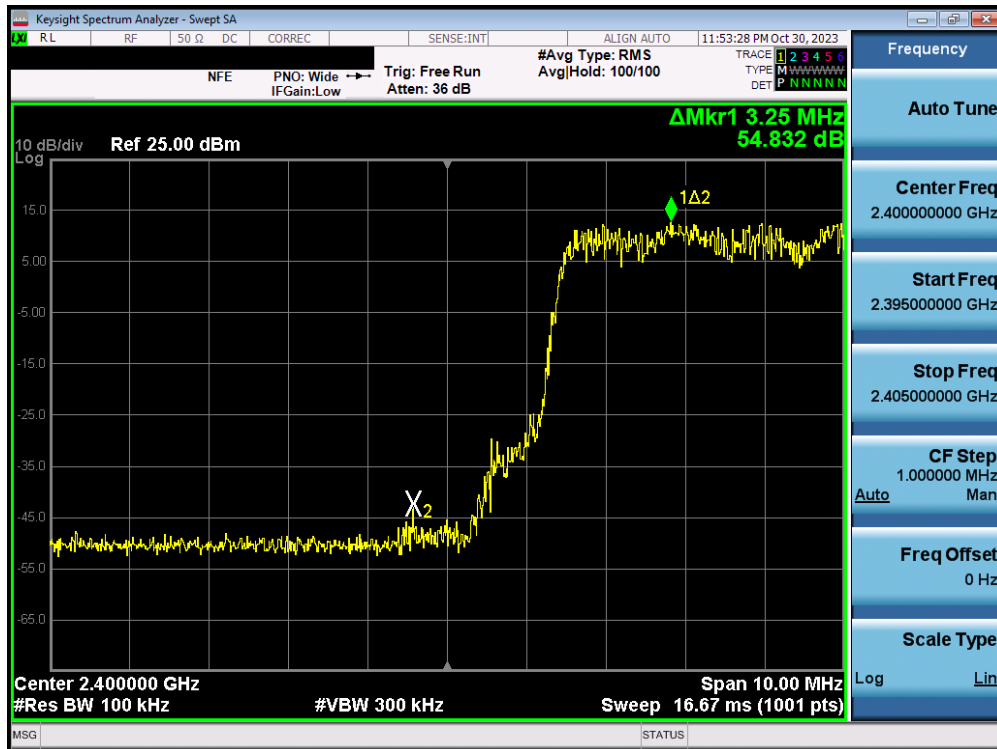


Plot 7-115. Band Edge Plot (Bluetooth with Hopping Enabled, 3 Mbps – Ch. 0) – ANT2

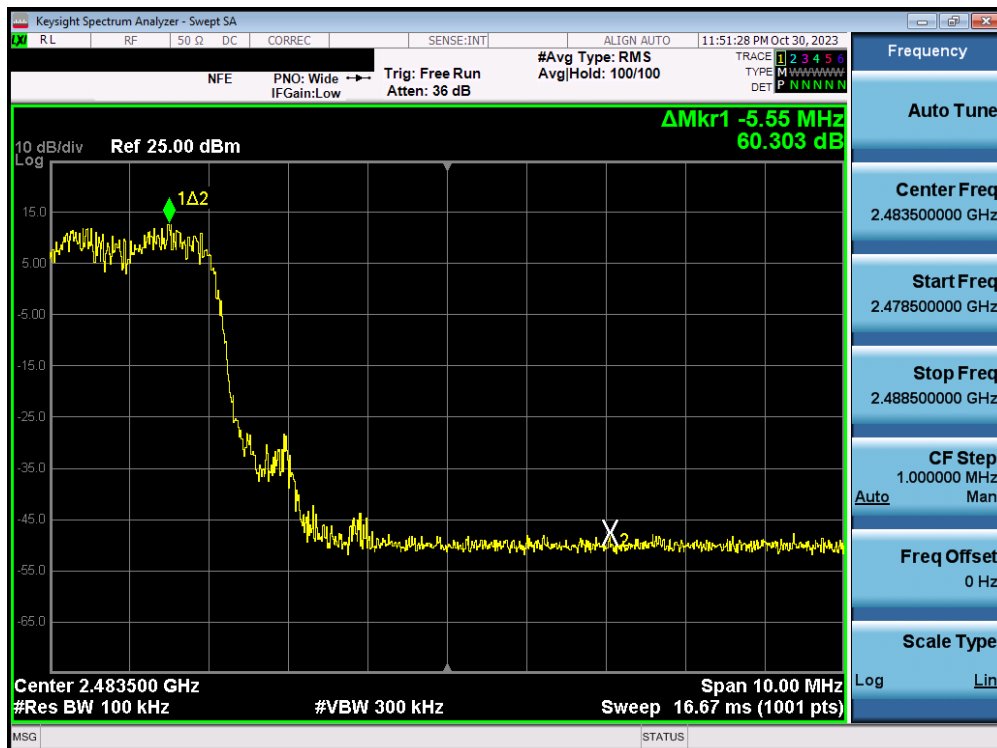


Plot 7-116. Band Edge Plot (Bluetooth with Hopping Enabled, 3 Mbps – Ch. 78) – ANT2

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 77 of 138

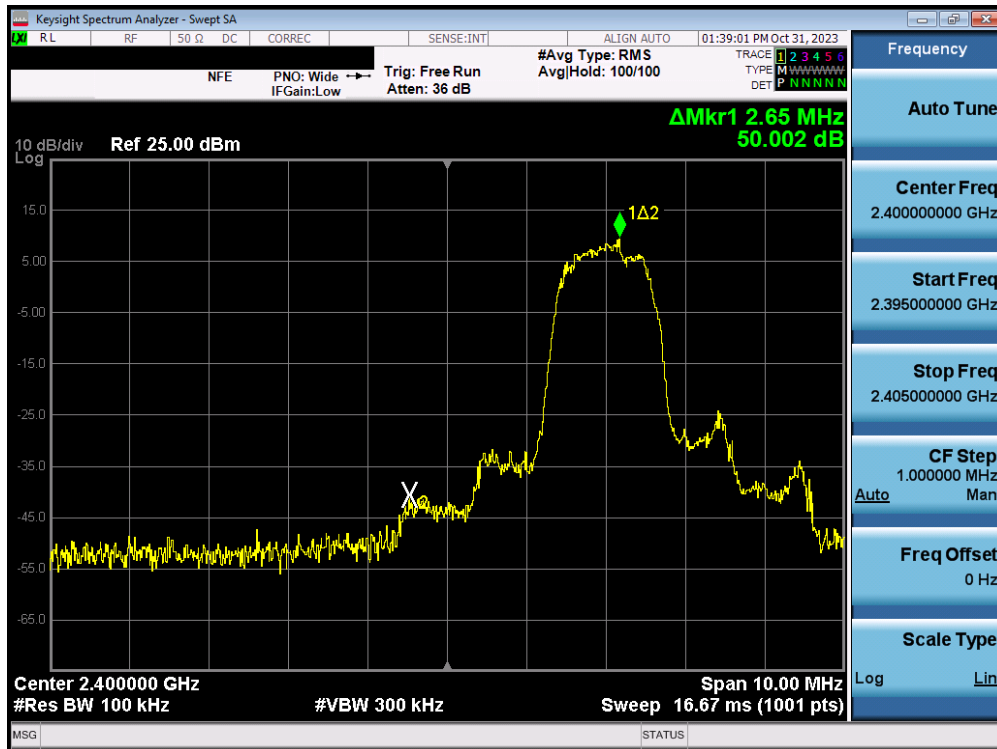


Plot 7-117. Band Edge Plot (Bluetooth with Hopping Disabled, 3 Mbps – Ch. 0) – Dual ANT1

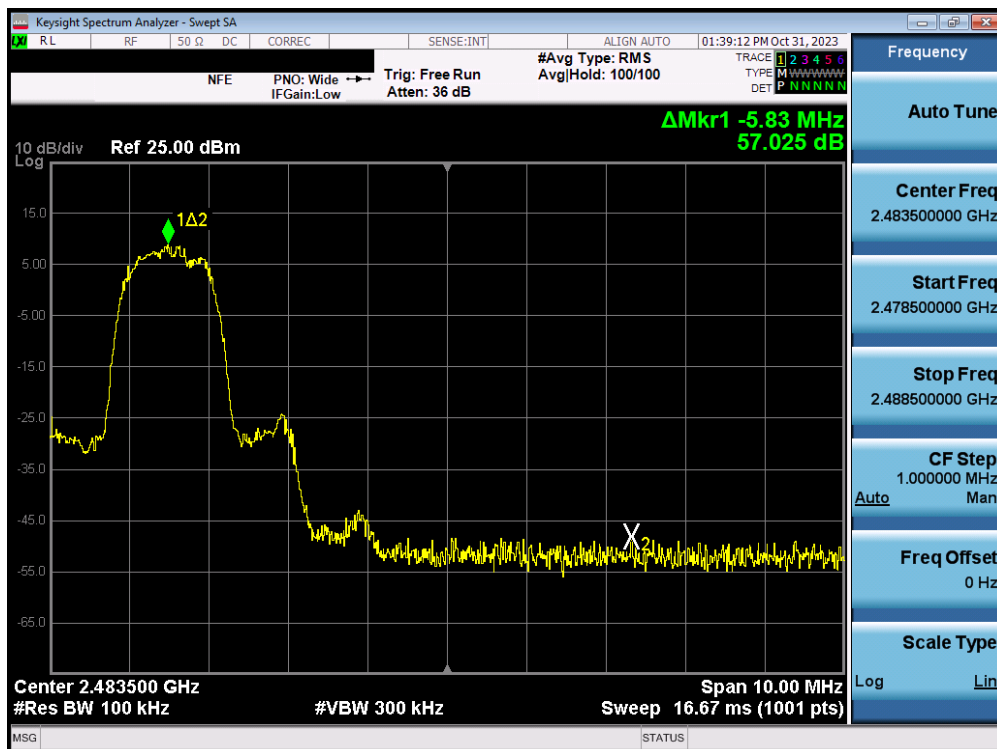


Plot 7-118. Band Edge Plot (Bluetooth with Hopping Disabled, 3 Mbps – Ch. 78) – Dual ANT1

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07-A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 78 of 138

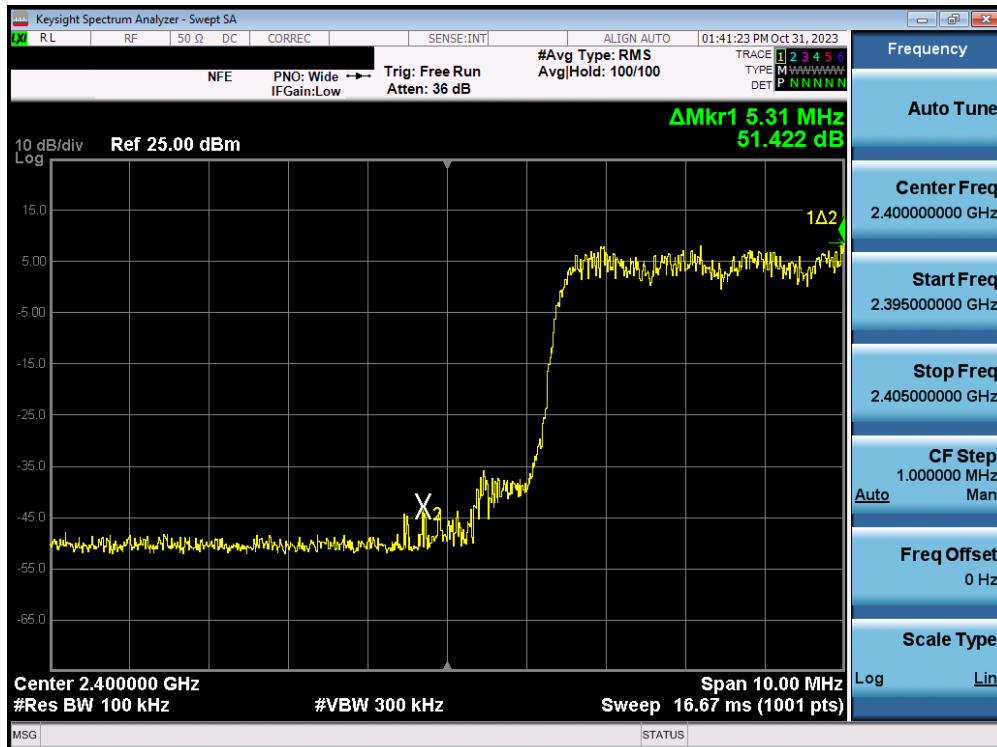

Plot 7-119. Band Edge Plot (Bluetooth with Hopping Enabled, 3 Mbps) – Dual ANT1

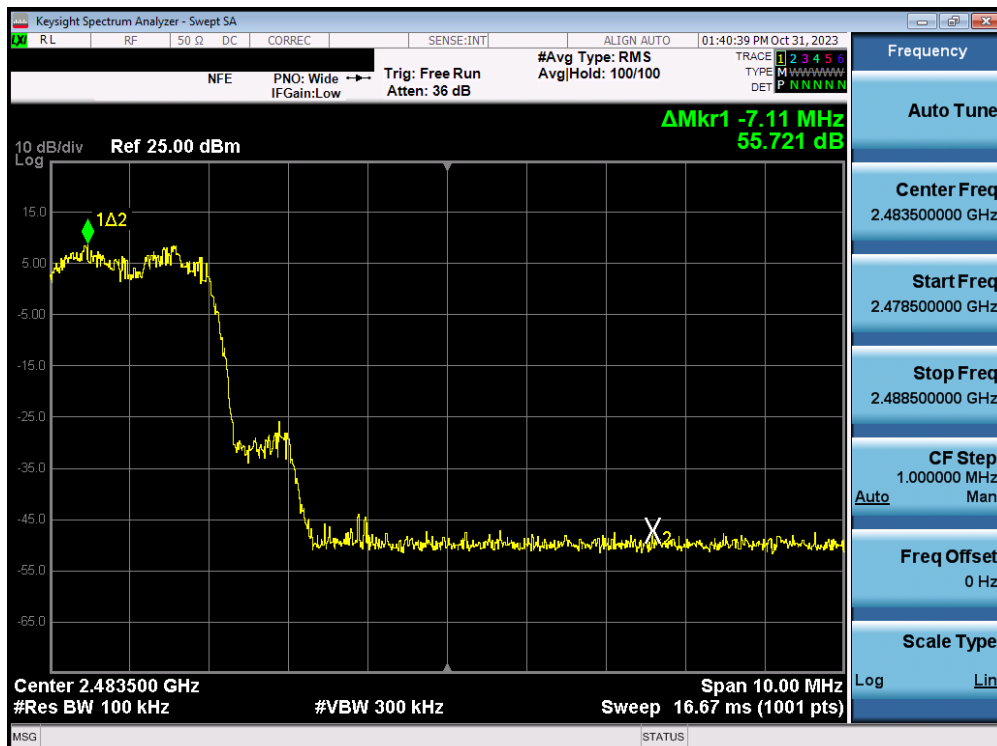


Plot 7-120. Band Edge Plot (Bluetooth with Hopping Enabled, 3 Mbps) – Dual ANT1

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 79 of 138



Plot 7-121. Band Edge Plot (Bluetooth with Hopping Disabled, 3 Mbps – Ch. 0) – Dual ANT2

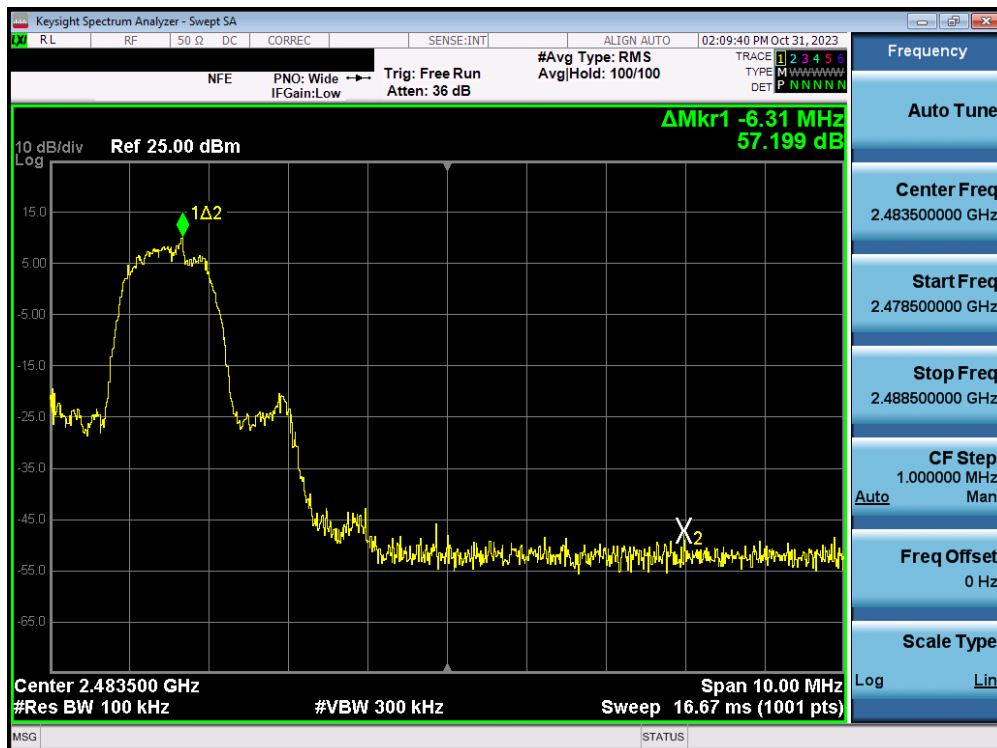

Plot 7-122. Band Edge Plot (Bluetooth with Hopping Disabled, 3 Mbps – Ch. 78) – Dual ANT2

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 80 of 138





## 7.5 Carrier Frequency Separation

§15.247 (a.1); RSS-247 [5.1(2)]

### Test Overview and Limit

Measurement is made with EUT operating in hopping mode. **The minimum permissible channel separation for this system is 2/3 the value of the 20dB BW.**

### Test Procedure Used

ANSI C63.10-2013 – Section 7.8.2

### Test Settings

1. Span = Wide enough to capture peaks of two adjacent channels
2. RBW = 30% of channel spacing. Adjust as necessary to best identify center of each individual channel
3. VBW  $\geq$  RBW
4. Sweep = Auto
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize.
8. Marker-delta function used to determine separation between peaks of the adjacent channels

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes

The EUT complies with the minimum channel separation requirement when it is operating in 1x/EDR mode using 79 channels and when operating in AFH mode using 20 channels.

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 82 of 138


Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Min. Channel Separation [MHz]
2402	1.0	GFSK	0	0.626
2441	1.0	GFSK	39	0.620
2480	1.0	GFSK	78	0.625
2402	2.0	$\pi/4$ -DQPSK	0	0.813
2441	2.0	$\pi/4$ -DQPSK	39	0.897
2480	2.0	$\pi/4$ -DQPSK	78	0.870
2402	3.0	8DPSK	0	0.851
2441	3.0	8DPSK	39	0.888
2480	3.0	8DPSK	78	0.881

**Table 7-9. Minimum Channel Separation – ANT1**


Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Min. Channel Separation [MHz]
2402	1.0	GFSK	0	0.627
2441	1.0	GFSK	39	0.629
2480	1.0	GFSK	78	0.623
2402	2.0	$\pi/4$ -DQPSK	0	0.880
2441	2.0	$\pi/4$ -DQPSK	39	0.877
2480	2.0	$\pi/4$ -DQPSK	78	0.884
2402	3.0	8DPSK	0	0.864
2441	3.0	8DPSK	39	0.902
2480	3.0	8DPSK	78	0.882

**Table 7-10. Minimum Channel Separation – ANT2**

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 83 of 138

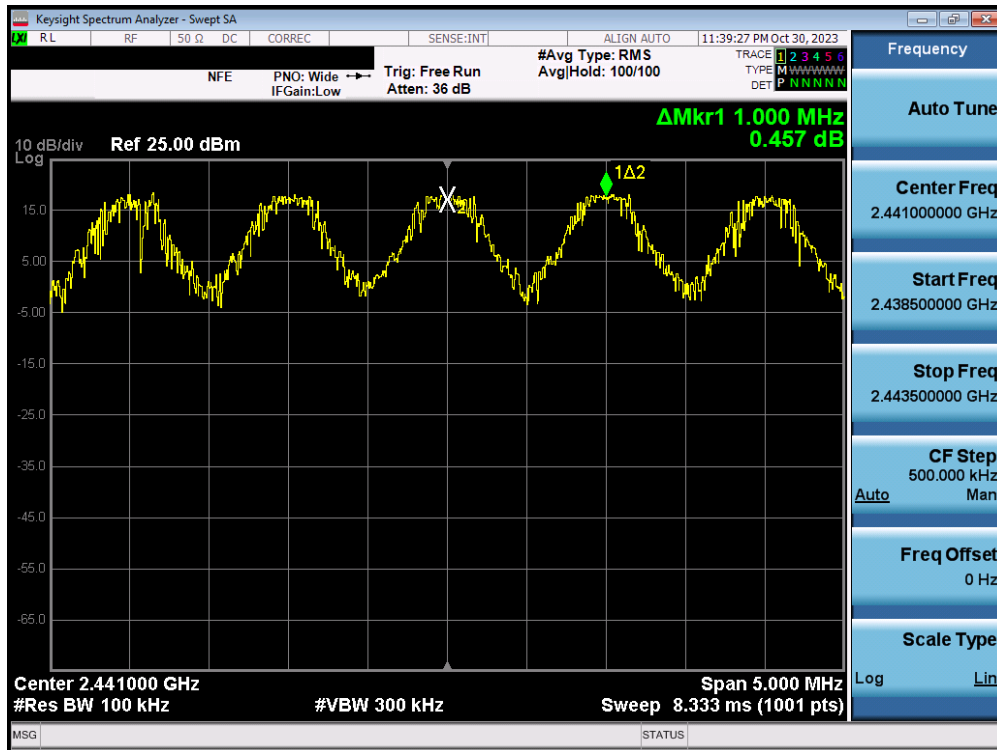

Plot 7-125. Channel Spacing Plot (Bluetooth) – ANT1

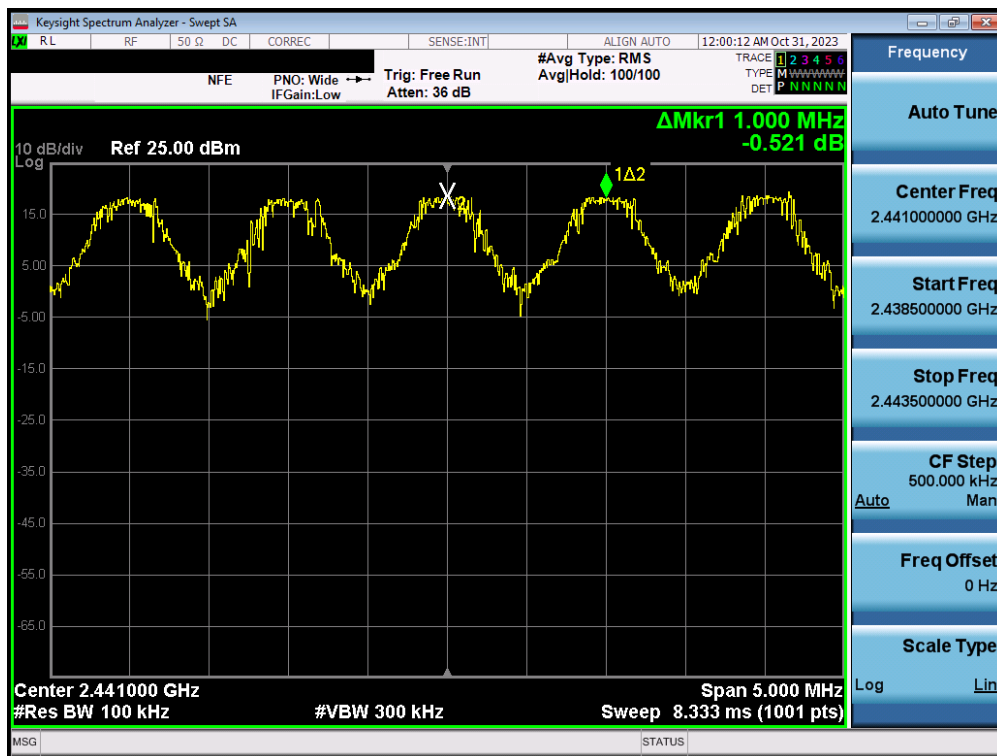

Plot 7-126. Channel Spacing Plot (Bluetooth) – ANT2

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 84 of 138


Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Min. Channel Separation [MHz]
2402	1.0	GFSK	0	0.616
2441	1.0	GFSK	39	0.612
2480	1.0	GFSK	78	0.573
2402	2.0	$\pi/4$ -DQPSK	0	0.895
2441	2.0	$\pi/4$ -DQPSK	39	0.875
2480	2.0	$\pi/4$ -DQPSK	78	0.882
2402	3.0	8DPSK	0	0.870
2441	3.0	8DPSK	39	0.900
2480	3.0	8DPSK	78	0.848

**Table 7-11. Minimum Channel Separation – Dual ANT1**


Frequency [MHz]	Data Rate [Mbps]	Mod.	Channel No.	Min. Channel Separation [MHz]
2402	1.0	GFSK	0	0.631
2441	1.0	GFSK	39	0.625
2480	1.0	GFSK	78	0.634
2402	2.0	$\pi/4$ -DQPSK	0	0.879
2441	2.0	$\pi/4$ -DQPSK	39	0.877
2480	2.0	$\pi/4$ -DQPSK	78	0.886
2402	3.0	8DPSK	0	0.873
2441	3.0	8DPSK	39	0.895
2480	3.0	8DPSK	78	0.891

**Table 7-12. Minimum Channel Separation – Dual ANT2**

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 85 of 138

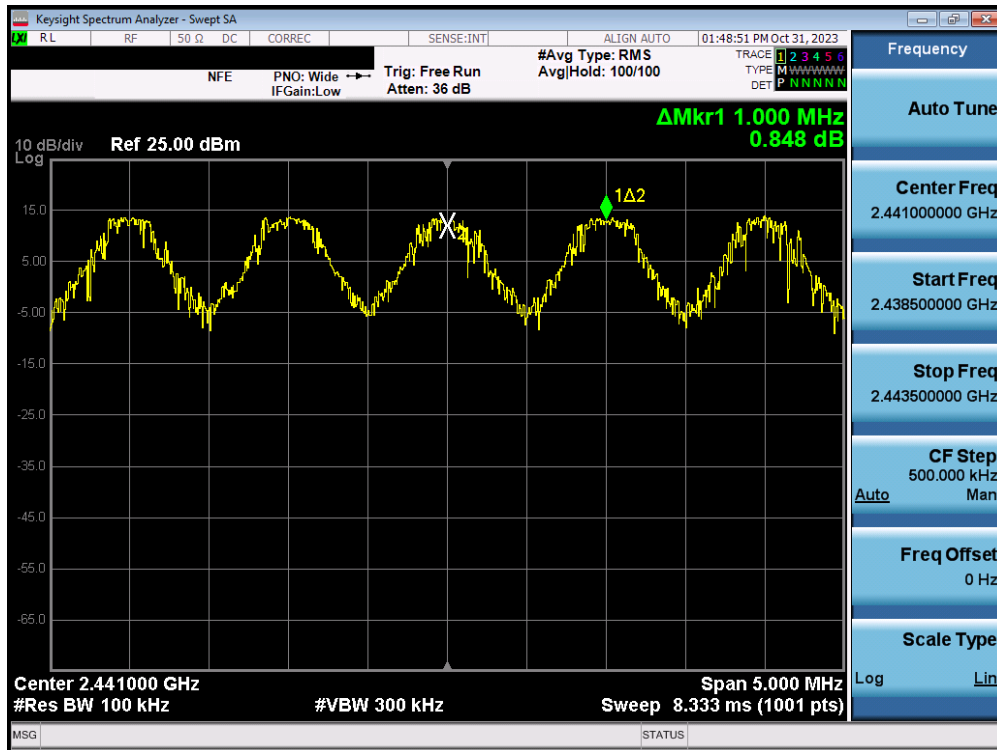

Plot 7-127. Channel Spacing Plot (Bluetooth) – Dual ANT1

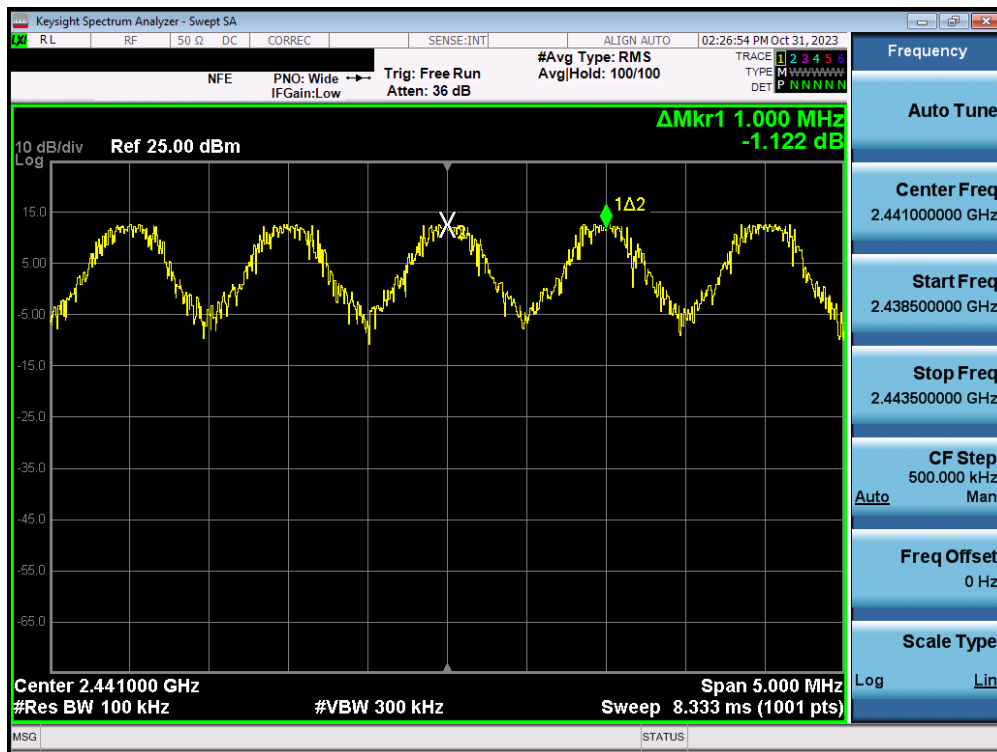

Plot 7-128. Channel Spacing Plot (Bluetooth) –Dual ANT2

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 86 of 138

## 7.6 Time of Occupancy

§15.247 (a.1.iii); RSS-247 [5.1(4)]

### Test Overview and Limit

Measurement is made while EUT is operating in hopping mode with the spectrum analyzer set to zero span. **The maximum permissible time of occupancy is 400 ms within a period of 400ms multiplied by the number of hopping channels employed.**

### Test Procedure Used

ANSI C63.10-2013 – Section 7.8.4

### Test Settings

1. Span = zero span, centered on a hopping channel
2. RBW  $\leq$  channel spacing and  $\gg 1/T$ , where T is expected dwell time per channel
3. Sweep = as necessary to capture entire dwell time. Second plot may be required to demonstrate two successive hops on a channel
4. Trigger is set with appropriate trigger delay to place pulse near the center of the plot
5. Detector = peak
6. Trace mode = max hold
7. Marker-delta function used to determine transmit time per hop

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

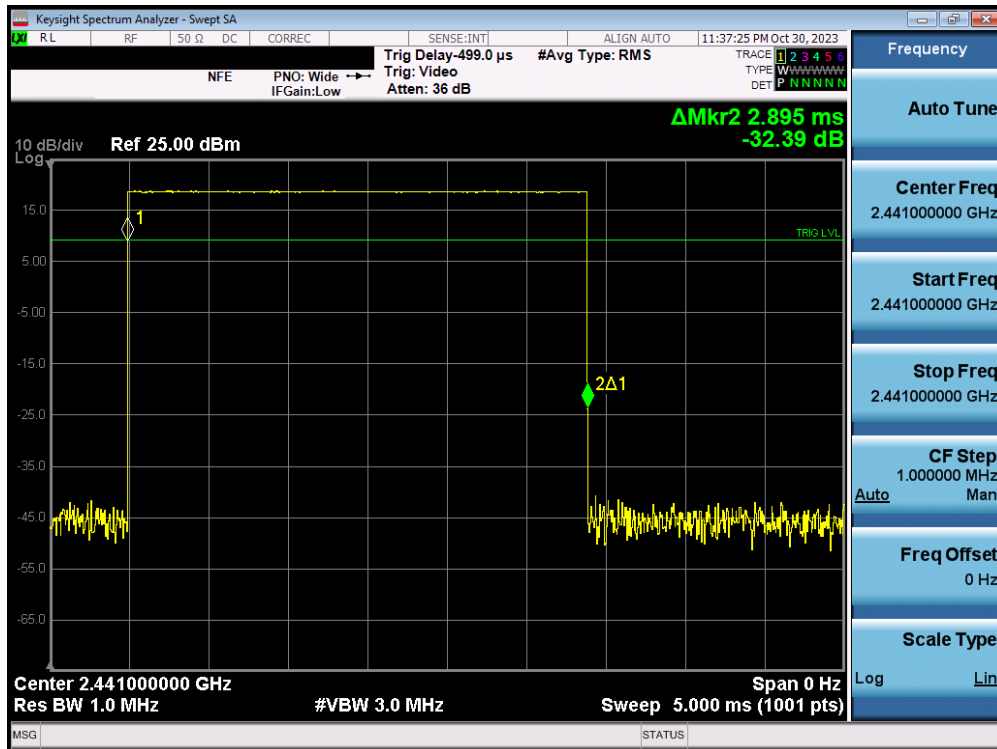


Figure 7-5. Test Instrument & Measurement Setup

### Test Notes

None

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 87 of 138



Plot 7-129. Time of Occupancy Plot (Bluetooth) – ANT1

### Bluetooth Time of Occupancy Calculation

Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s. Since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of  $1600 / 6 = 266.67$  hops/s/slot


- $400\text{ms} \times 79$  hopping channels = 31.6 sec (Time of Occupancy Limit)
- Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)
- $266.67 \text{ hops/second} / 79$  channels = 3.38 hops/second (# of hops/second on one channel)
- $3.38 \text{ hops/second/channel} \times 31.6$  seconds = 106.67 hops (# hops over a 31.6 second period)
- $106.67 \text{ hops} \times 2.895\text{ms/channel}$  = 308.81 ms (worst case dwell time for one channel in 1x/EDR modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800 hops/s. AFH mode also uses 6 total slots so the Bluetooth transmitter hops at a rate of  $800 / 6 = 133.3$  hops/s/slot

- $400\text{ms} \times 20$  hopping channels = 8 sec (Time of Occupancy Limit)
- Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)
- $133.3 \text{ hops/s} / 20$  channels = 6.67 hops/second (# of hops/second on one channel)
- $6.67 \text{ hops/s} / \text{channel} \times 8$  seconds = 53.34 hops (# hops over a 8 second period)
- $53.34 \text{ hops} \times 2.895 \text{ ms/channel}$  = 154.4 ms (worst case dwell time for one channel in AFH mode)

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 88 of 138



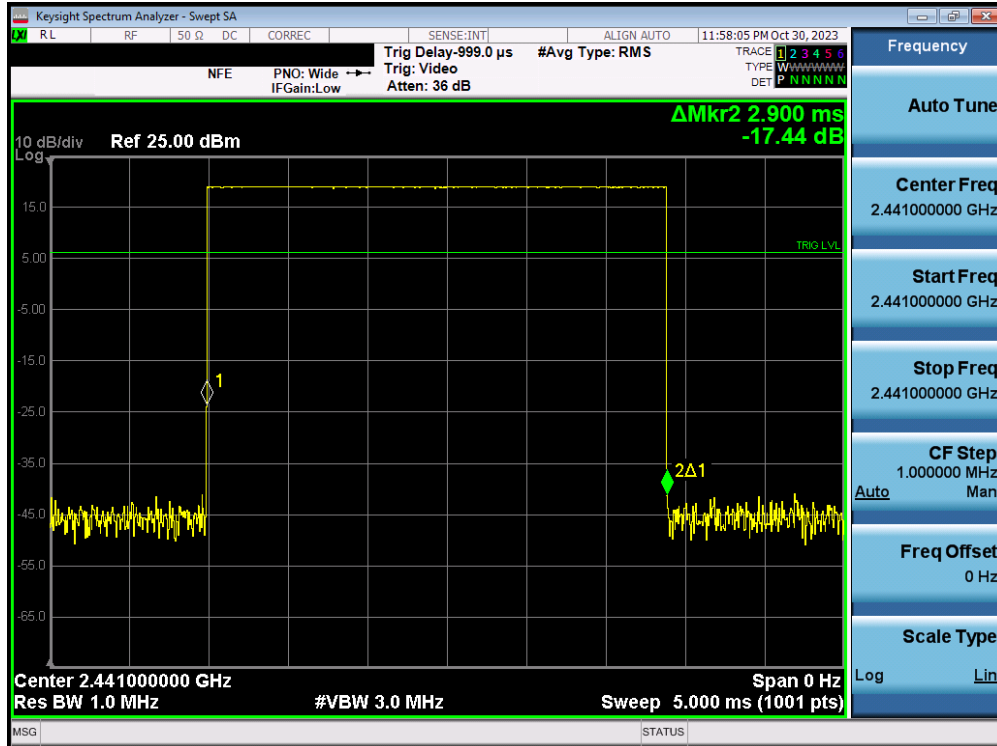

Plot 7-130. Time of Occupancy Plot (Bluetooth) – ANT2

### Bluetooth Time of Occupancy Calculation


Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s. Since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of  $1600 / 6 = 266.67$  hops/s/slot

- $400\text{ms} \times 79$  hopping channels = 31.6 sec (Time of Occupancy Limit)
- Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)
- $266.67 \text{ hops/second} / 79$  channels = 3.38 hops/second (# of hops/second on one channel)
- $3.38 \text{ hops/second/channel} \times 31.6$  seconds = 106.67 hops (# hops over a 31.6 second period)
- $106.67 \text{ hops} \times 2.9\text{ms/channel}$  = 309.34 ms (worst case dwell time for one channel in 1x/EDR modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800 hops/s. AFH mode also uses 6 total slots so the Bluetooth transmitter hops at a rate of  $800 / 6 = 133.3$  hops/s/slot

- $400\text{ms} \times 20$  hopping channels = 8 sec (Time of Occupancy Limit)
- Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)
- $133.3 \text{ hops/s} / 20$  channels = 6.67 hops/second (# of hops/second on one channel)
- $6.67 \text{ hops/s} / \text{channel} \times 8$  seconds = 53.34 hops (# hops over a 8 second period)
- $53.34 \text{ hops} \times 2.9 \text{ ms/channel}$  = 154.69 ms (worst case dwell time for one channel in AFH mode)

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 89 of 138

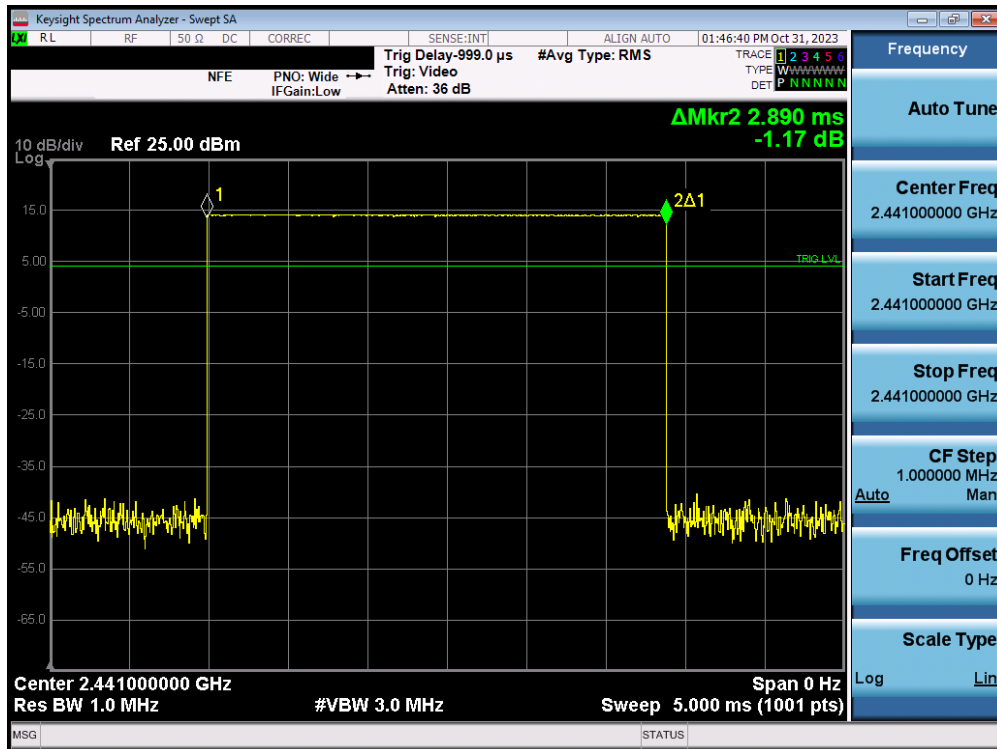

Plot 7-131. Time of Occupancy Plot (Bluetooth) – Dual ANT1

### Bluetooth Time of Occupancy Calculation


Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s. Since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of  $1600 / 6 = 266.67$  hops/s/slot

- $400\text{ms} \times 79$  hopping channels = 31.6 sec (Time of Occupancy Limit)
- Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)
- $266.67 \text{ hops/second} / 79$  channels = 3.38 hops/second (# of hops/second on one channel)
- $3.38 \text{ hops/second/channel} \times 31.6$  seconds = 106.67 hops (# hops over a 31.6 second period)
- $106.67 \text{ hops} \times 2.890 \text{ ms/channel}$  = 308.28 ms (worst case dwell time for one channel in 1x/EDR modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800 hops/s. AFH mode also uses 6 total slots so the Bluetooth transmitter hops at a rate of  $800 / 6 = 133.3$  hops/s/slot

- $400\text{ms} \times 20$  hopping channels = 8 sec (Time of Occupancy Limit)
- Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)
- $133.3 \text{ hops/s} / 20$  channels = 6.67 hops/second (# of hops/second on one channel)
- $6.67 \text{ hops/s} / \text{channel} \times 8$  seconds = 53.34 hops (# hops over a 8 second period)
- $53.34 \text{ hops} \times 2.890 \text{ ms/channel}$  = 154.15 ms (worst case dwell time for one channel in AFH mode)

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 90 of 138

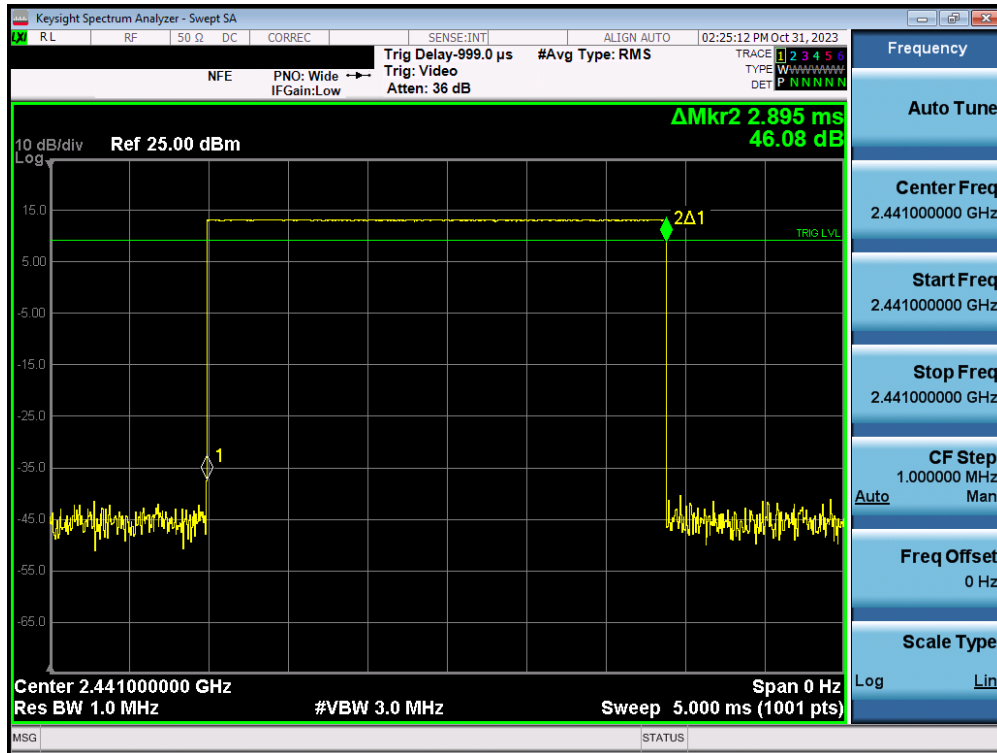

**Plot 7-132. Time of Occupancy Plot (Bluetooth) – Dual ANT2**

**Bluetooth Time of Occupancy Calculation**

Typically, Bluetooth 1x/EDR mode has a channel hopping rate of 1600 hops/s. Since 1x/EDR modes use 5 transmit and 1 receive slot, for a total of 6 slots, the Bluetooth transmitter is actually hopping at a rate of  $1600 / 6 = 266.67$  hops/s/slot

- $400\text{ms} \times 79$  hopping channels = 31.6 sec (Time of Occupancy Limit)
- Worst case BT has 266.67 hops/second (for 1x/EDR modes with DH5 operation)
- $266.67 \text{ hops/second} / 79$  channels = 3.38 hops/second (# of hops/second on one channel)
- $3.38 \text{ hops/second/channel} \times 31.6$  seconds = 106.67 hops (# hops over a 31.6 second period)
- $106.67 \text{ hops} \times 2.895\text{ms/channel}$  = 308.81 ms (worst case dwell time for one channel in 1x/EDR modes)

With AFH, the number of channels is reduced to a minimum of 20 channels and the channel hopping rate is reduced by 50% to 800 hops/s. AFH mode also uses 6 total slots so the Bluetooth transmitter hops at a rate of  $800 / 6 = 133.3$  hops/s/slot

- $400\text{ms} \times 20$  hopping channels = 8 sec (Time of Occupancy Limit)
- Worst case BT has 133.3 hops/second/slot (for AFH mode with DH5 operation)
- $133.3 \text{ hops/s} / 20$  channels = 6.67 hops/second (# of hops/second on one channel)
- $6.67 \text{ hops/s} / \text{channel} \times 8$  seconds = 53.34 hops (# hops over a 8 second period)
- $53.34 \text{ hops} \times 2.895 \text{ ms/channel}$  = 154.4 ms (worst case dwell time for one channel in AFH mode)

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 91 of 138

## 7.7 Number of Hopping Channels

§15.247 (a.1.iii); RSS-247 [5.1(4)]

### Test Overview and Limit

Measurement is made while EUT is operating in hopping mode. ***This frequency hopping system must employ a minimum of 15 hopping channels.***

### Test Procedure Used

ANSI C63.10-2013 – Section 7.8.3

### Test Settings

1. Span = frequency of band of operation (divided into two plots)
2. RBW < 30% of channel spacing or 20dB bandwidth, whichever is smaller
3. VBW ≥ RBW
4. Sweep = auto
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

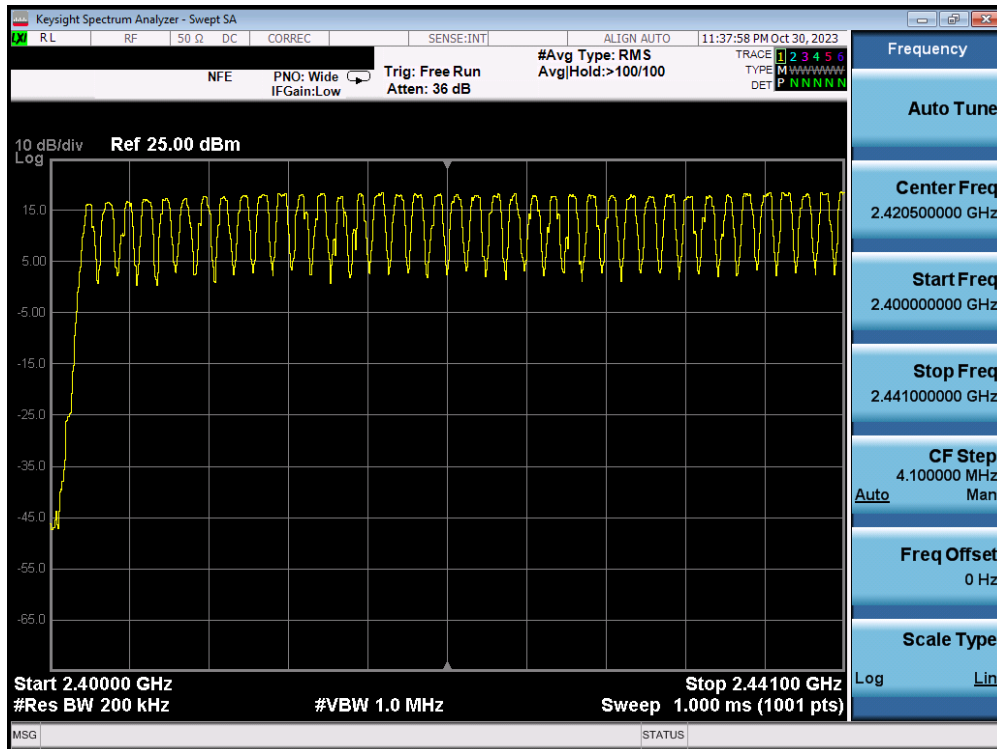


Figure 7-6. Test Instrument & Measurement Setup


### Test Notes

The frequency spectrum was broken up into two sub-ranges to clearly show all the hopping frequencies. In AFH mode, this device operates using 20 channels so the requirement for minimum number of hopping channels is satisfied.

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 92 of 138




Plot 7-133. Low End Spectrum Channel Hopping Plot (Bluetooth) – ANT1

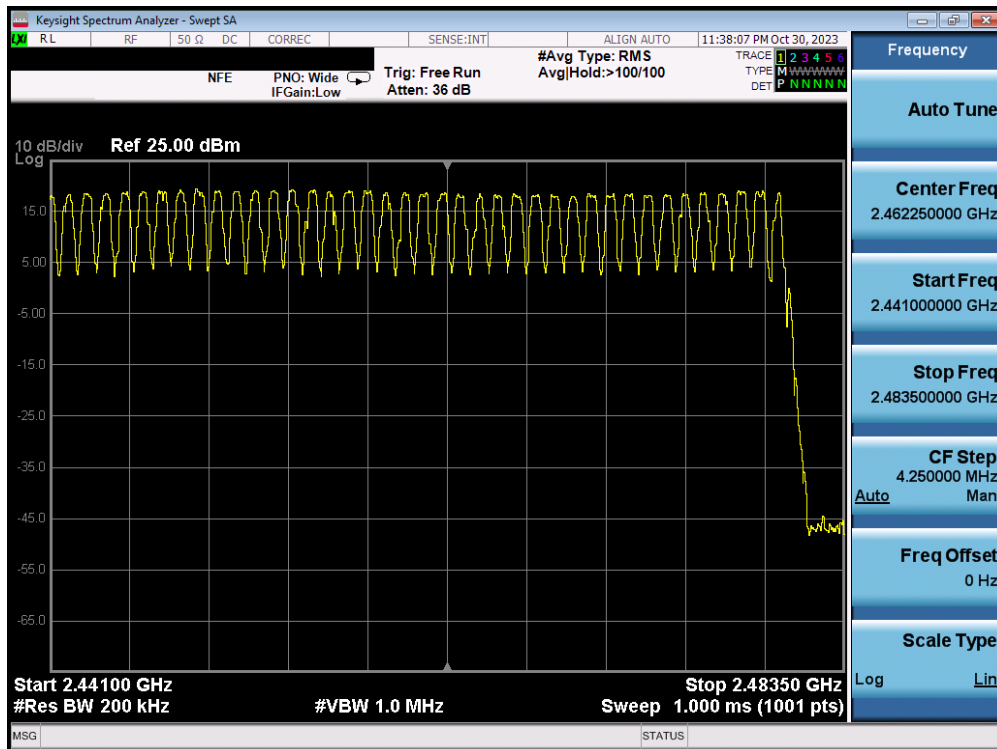


Plot 7-134. High End Spectrum Channel Hopping Plot (Bluetooth) – ANT1

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 93 of 138

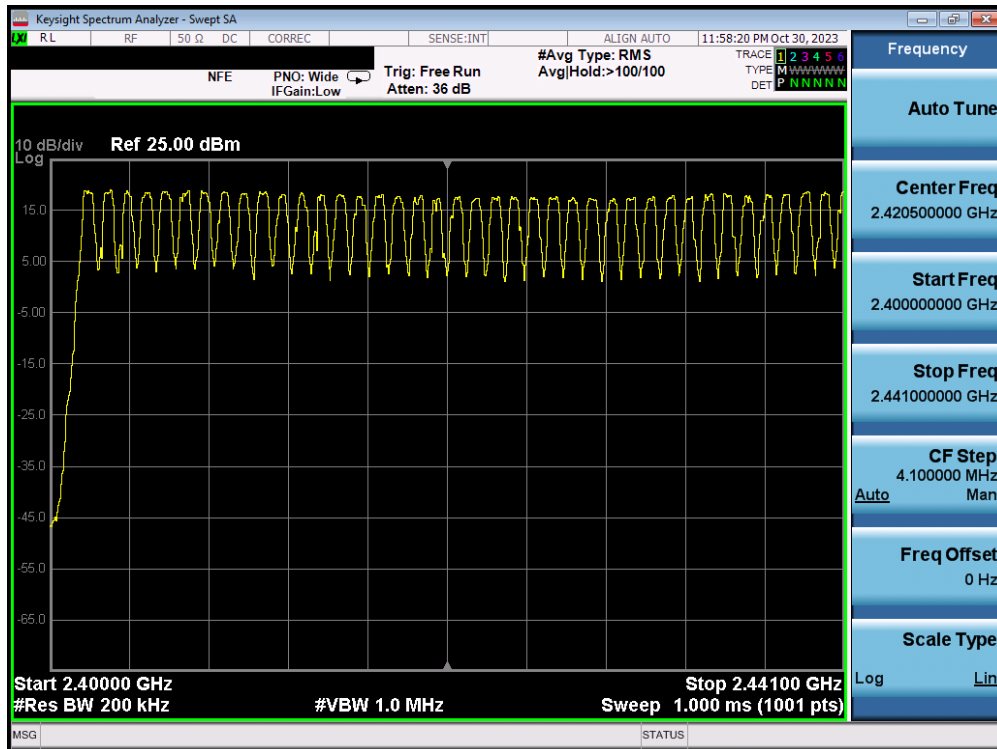


Plot 7-135. Low End Spectrum Channel Hopping Plot (Bluetooth) – ANT2

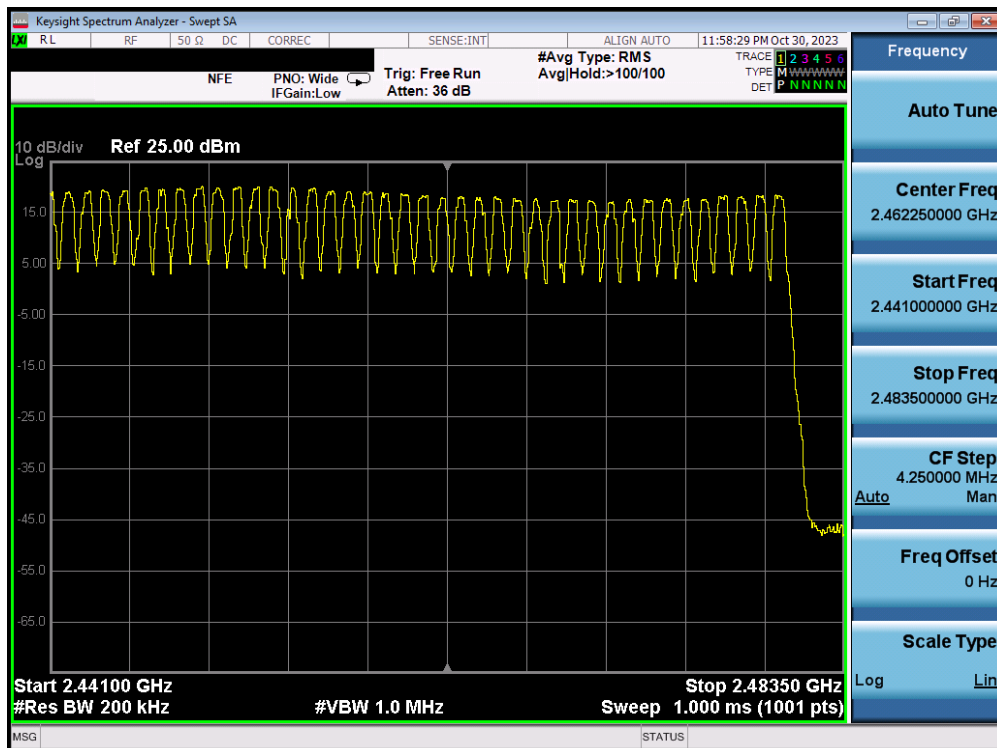


Plot 7-136. High End Spectrum Channel Hopping Plot (Bluetooth) – ANT2

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 94 of 138

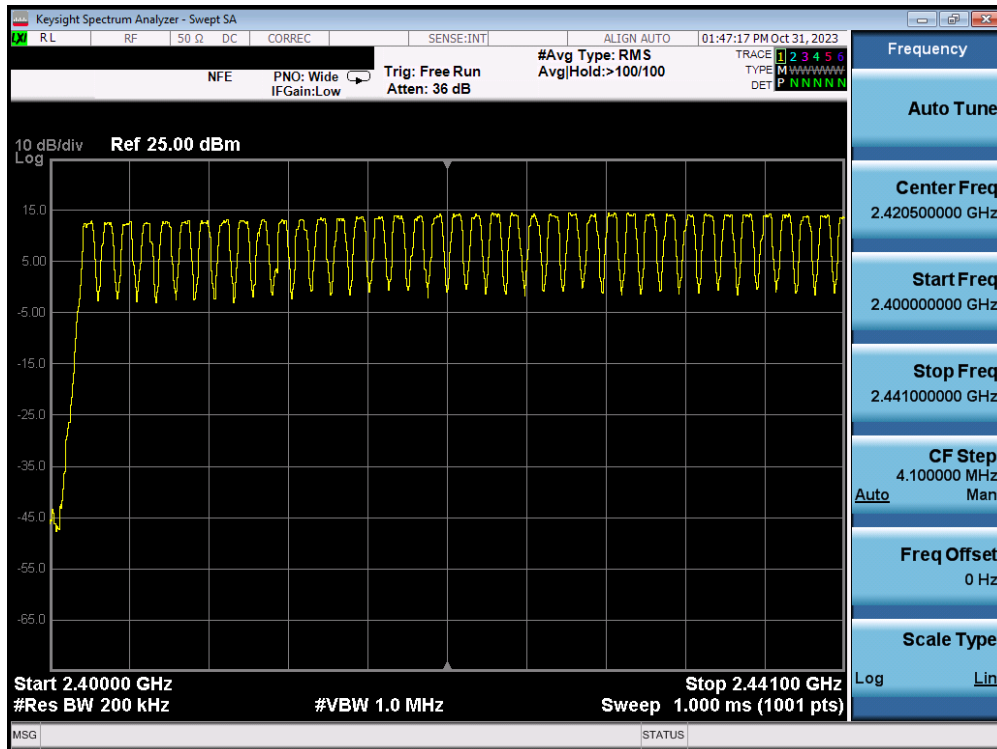


Plot 7-137. Low End Spectrum Channel Hopping Plot (Bluetooth) – Dual ANT1

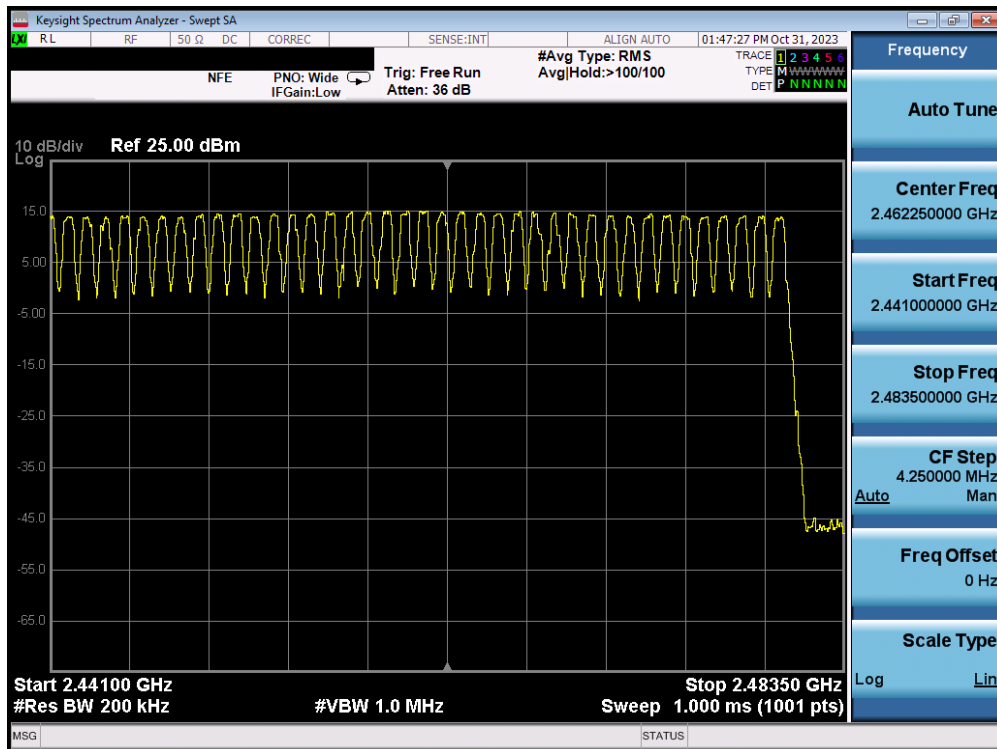


Plot 7-138. High End Spectrum Channel Hopping Plot (Bluetooth) – Dual ANT1

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 95 of 138

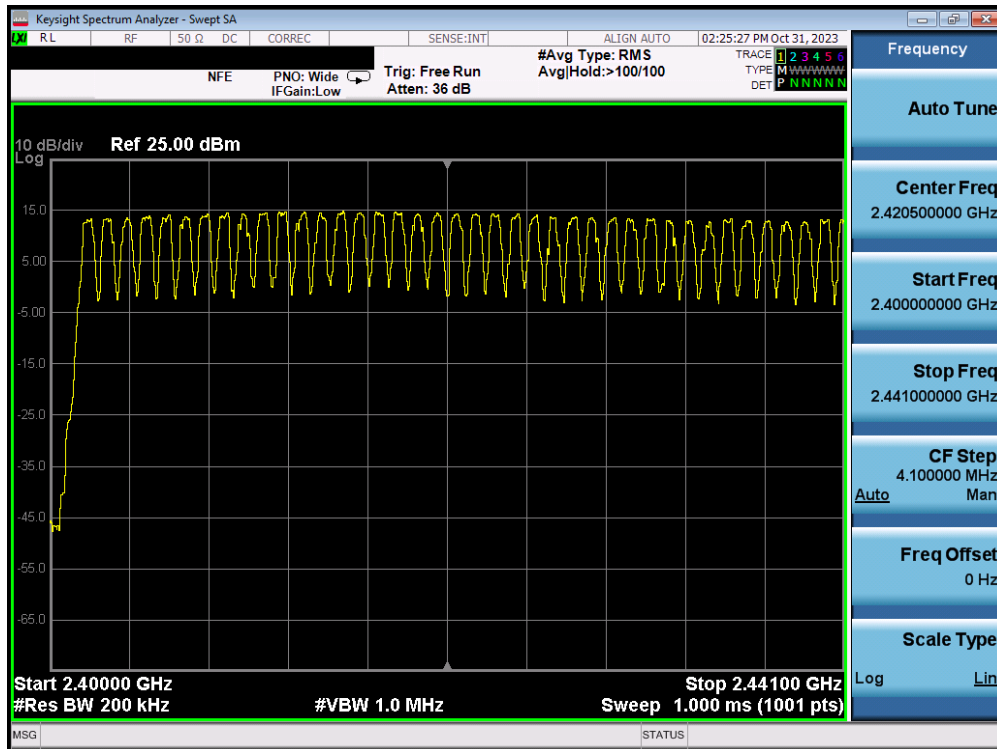

Plot 7-139. Low End Spectrum Channel Hopping Plot (Bluetooth) – Dual ANT2

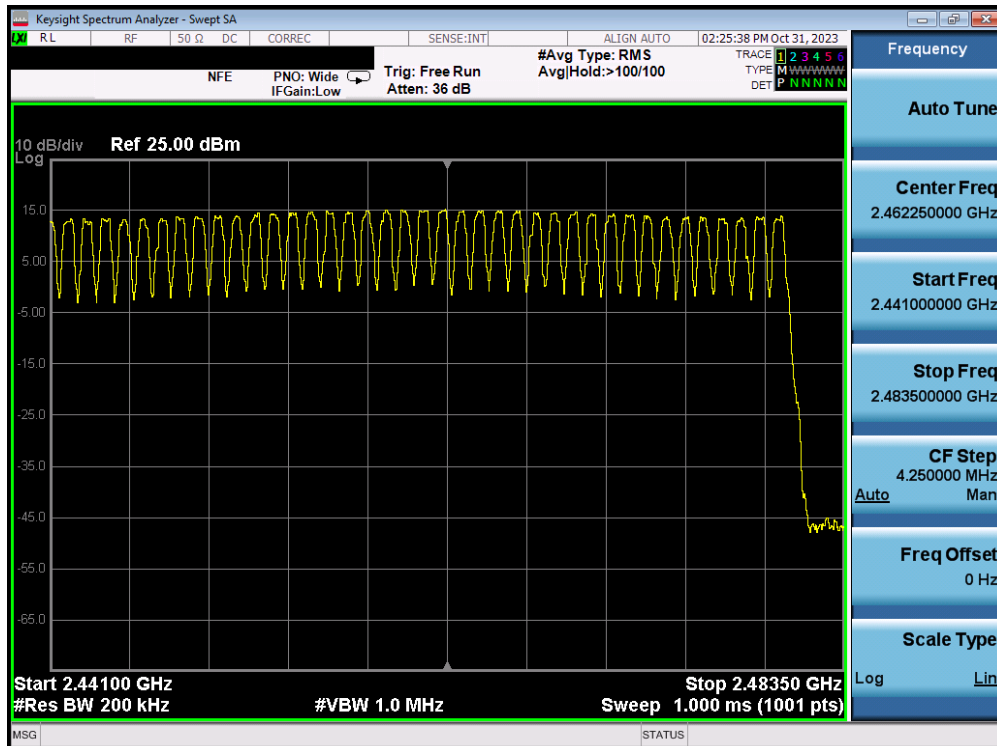

Plot 7-140. High End Spectrum Channel Hopping Plot (Bluetooth) – Dual ANT2

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 96 of 138



## 7.8 Conducted Spurious Emissions

§15.247 (d); RSS-247 [5.5]

### Test Overview and Limit

Conducted out-of-band spurious emissions were investigated from 30MHz up to 25GHz to include the 10<sup>th</sup> harmonic of the fundamental transmit frequency. **The maximum permissible out-of-band emission level is 20 dBc.**

### Test Procedure Used

ANSI C63.10-2013 – Section 7.8.8

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz\* (See note below)
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

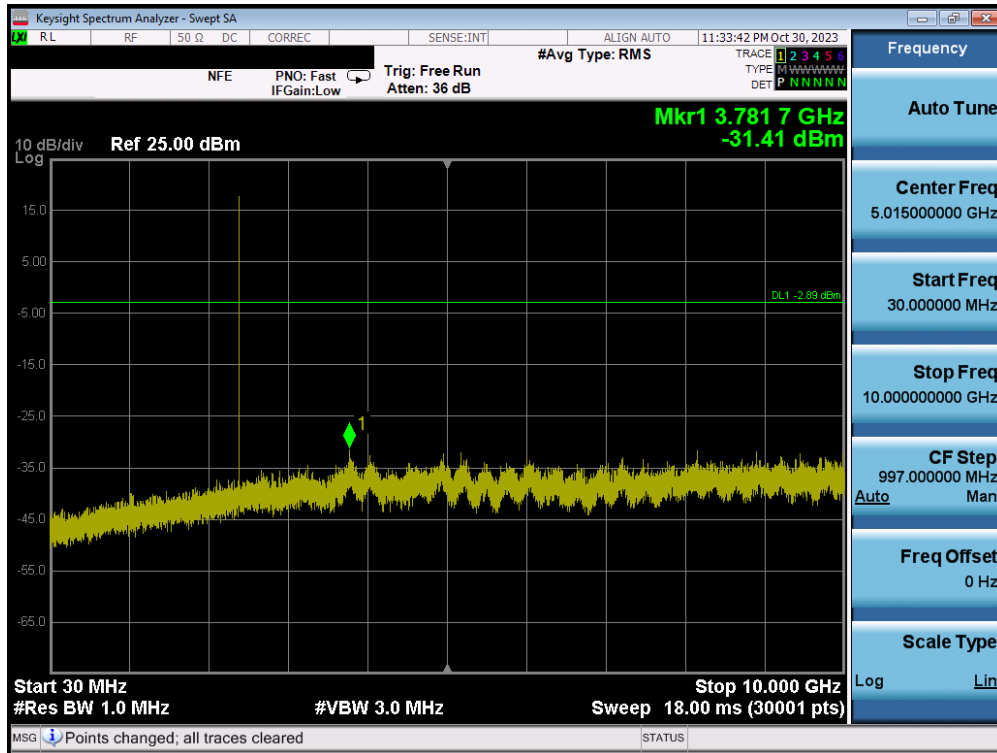


Figure 7-7. Test Instrument & Measurement Setup


### Test Notes

Out-of-band conducted spurious emissions were investigated for all data rates and the worst-case emissions were found with the EUT transmitting at N/AMbps. The display line shown in the following plots is the limit at 20dB below the fundamental emission level measured in a 100kHz bandwidth. However, the traces in the following plots are measured with a 1MHz RBW to reduce test time, so the display line may not necessarily appear to be 20dB below the level of the fundamental in a 1MHz bandwidth.

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 97 of 138




Plot 7-141. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 0) – ANT1

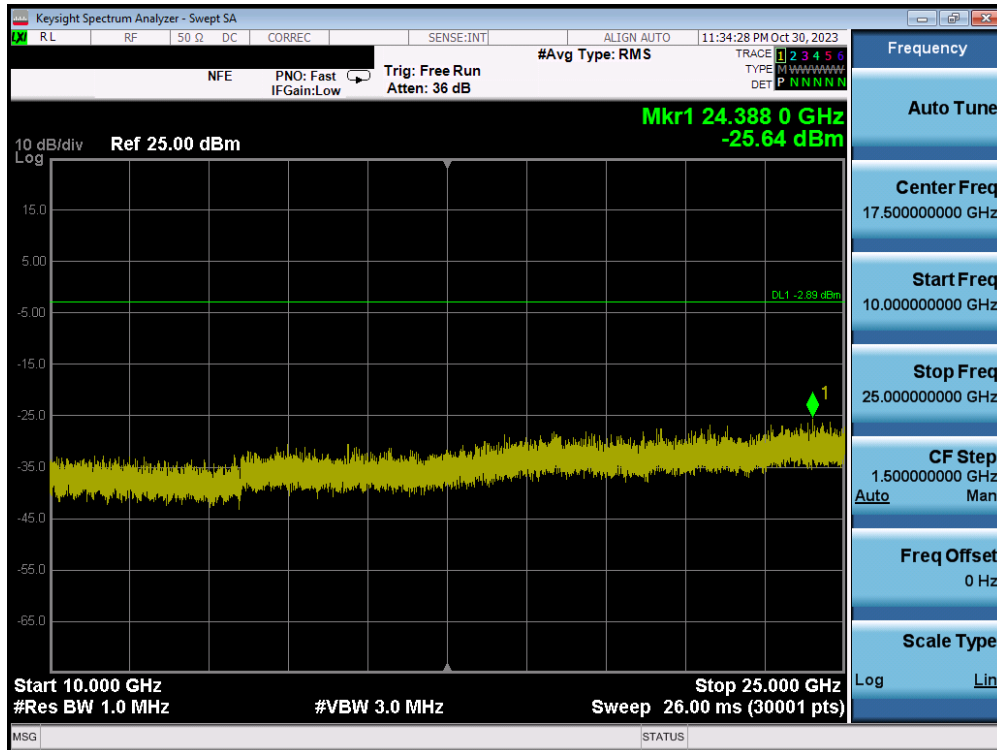


Plot 7-142. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 0) – ANT1

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 98 of 138

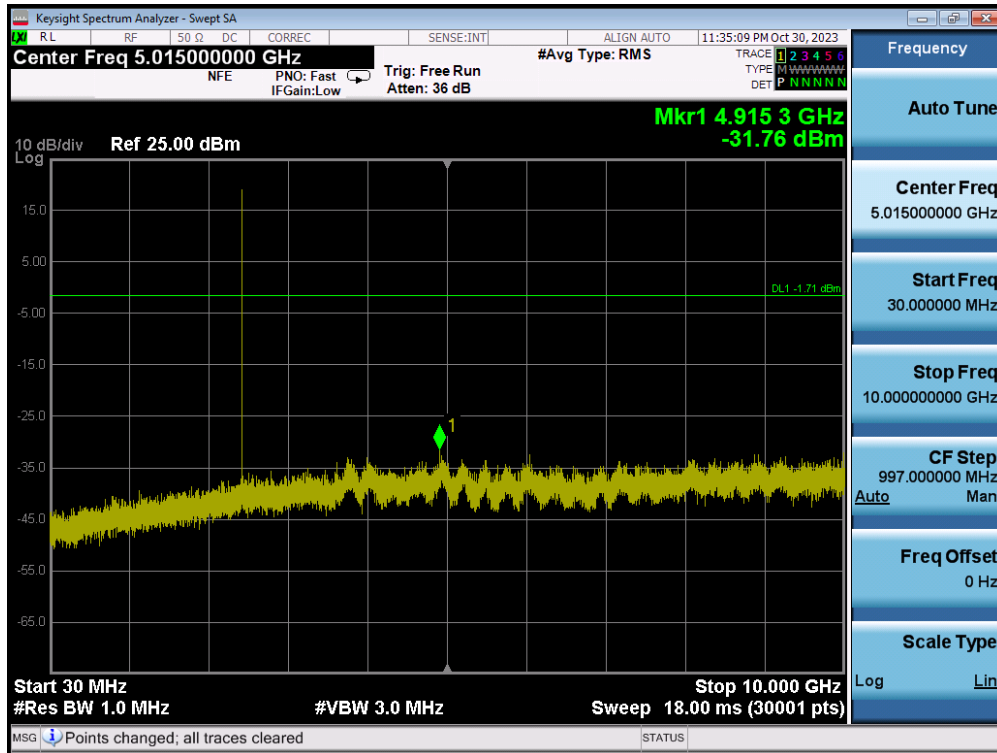


Plot 7-143. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 39) – ANT1

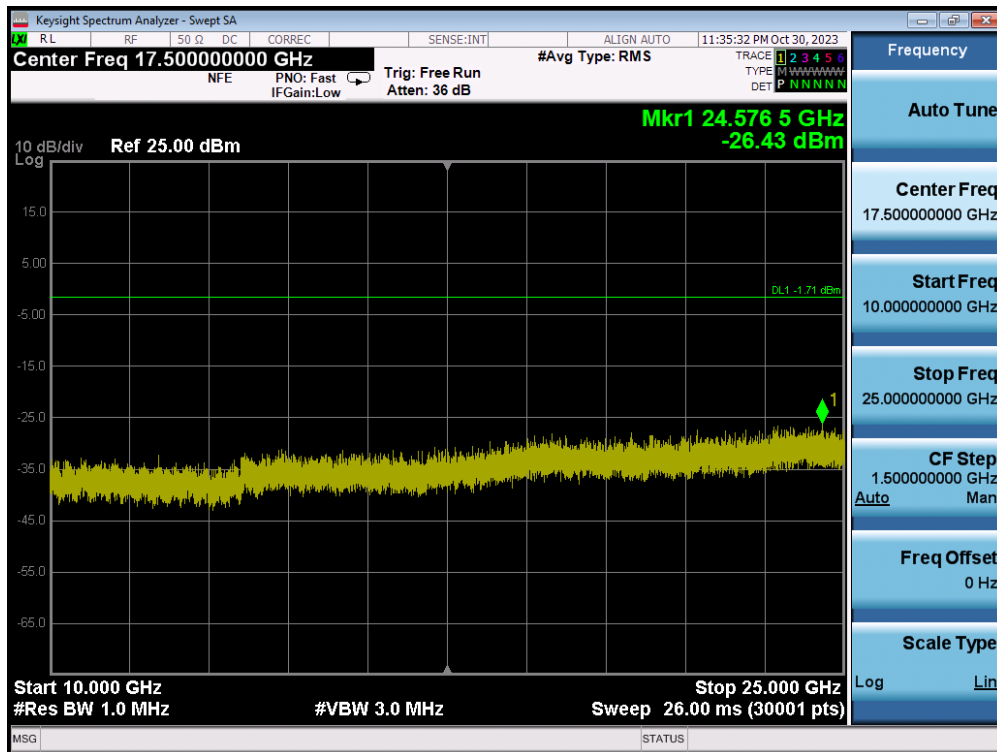


Plot 7-144. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 39) – ANT1

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 99 of 138

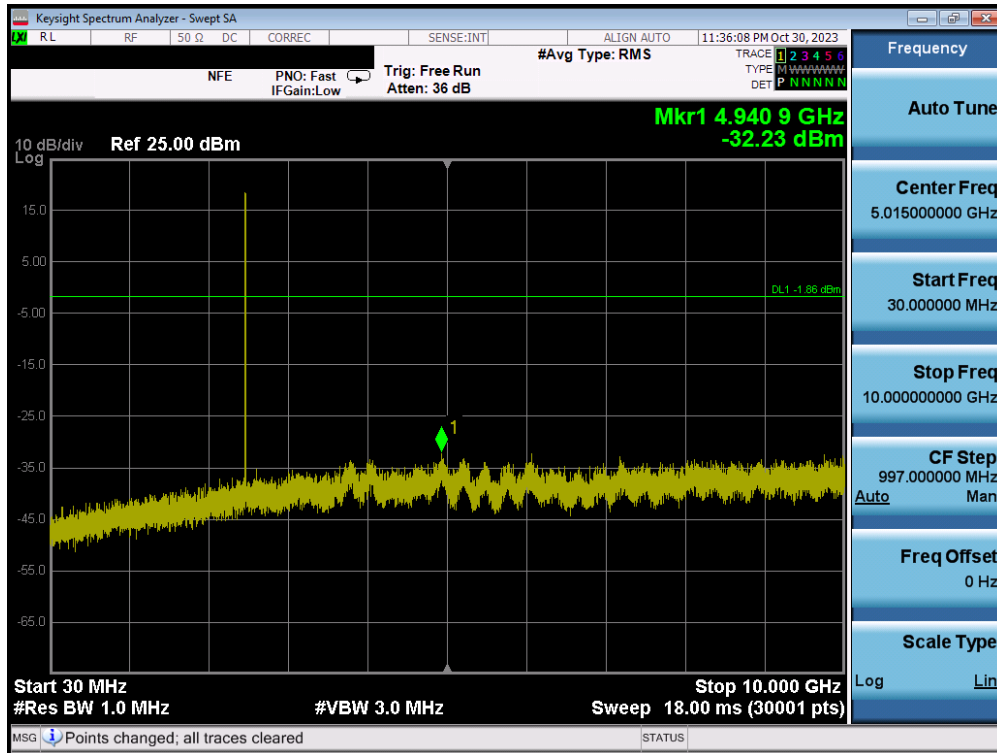


Plot 7-145. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 78) – ANT1

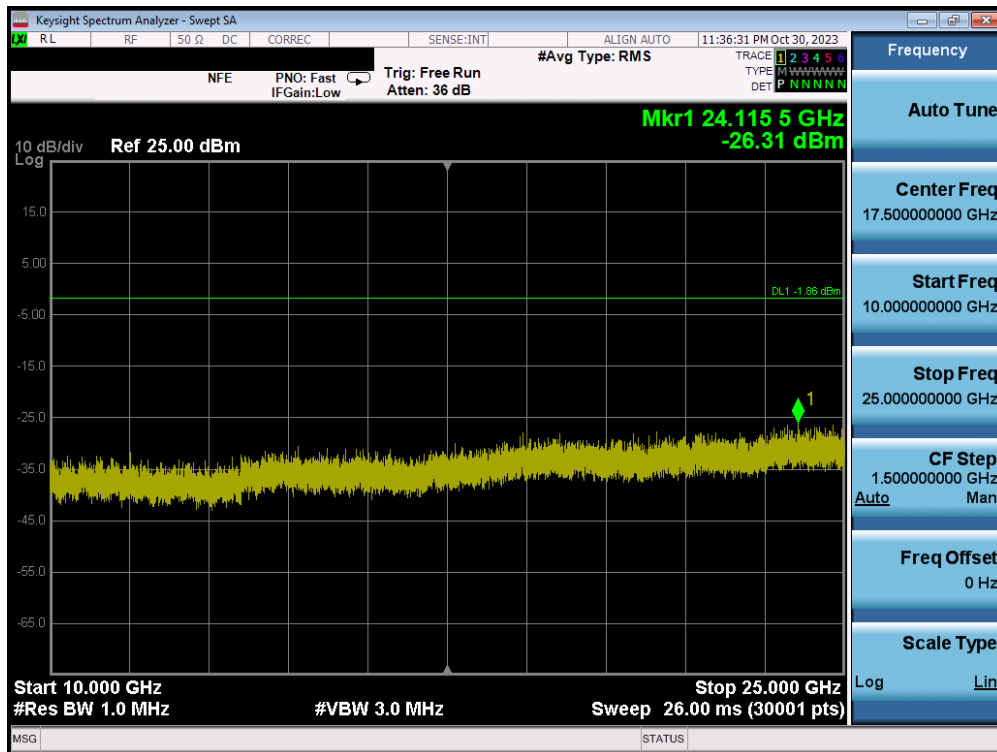


Plot 7-146. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 78) – ANT1

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 100 of 138

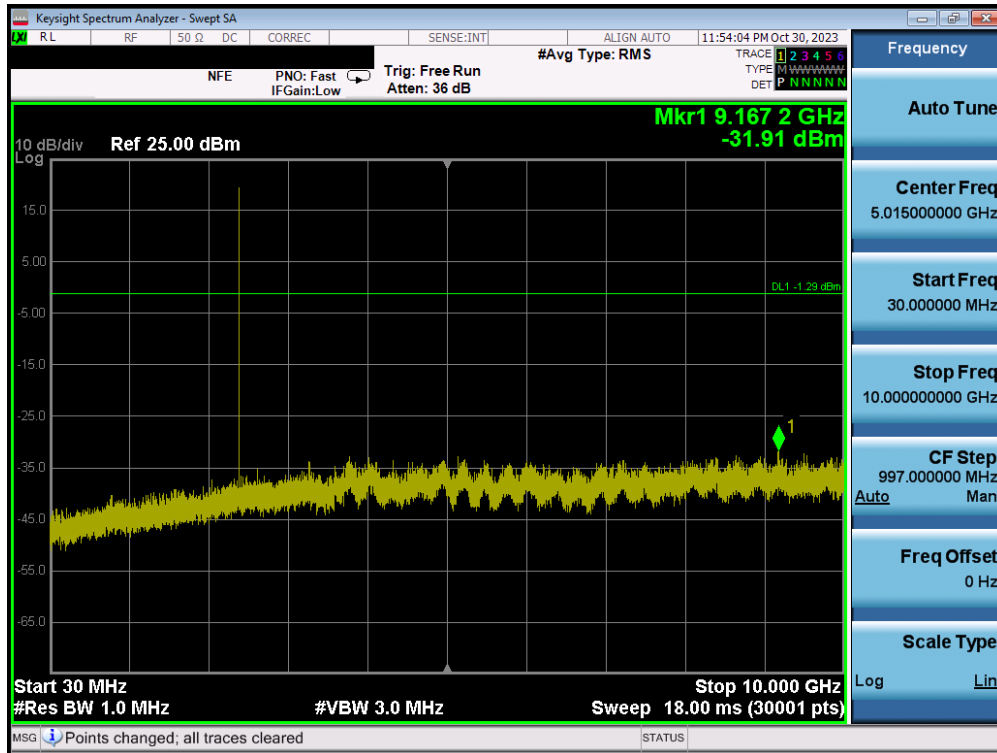


Plot 7-147. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 0) – ANT2

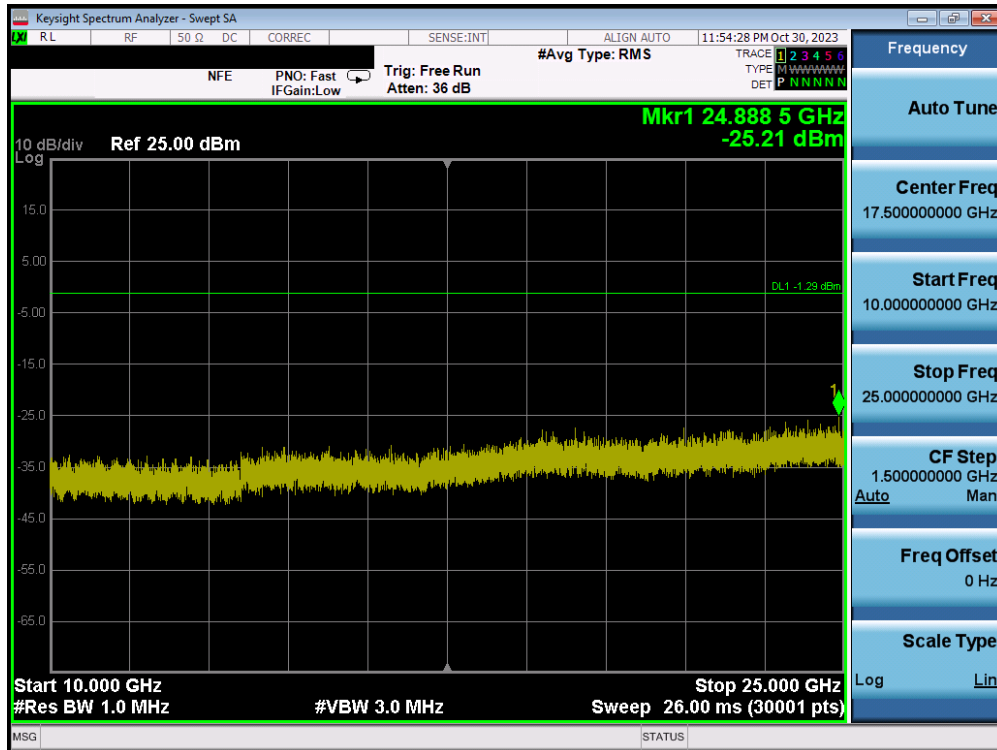


Plot 7-148. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 0) – ANT2

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 101 of 138

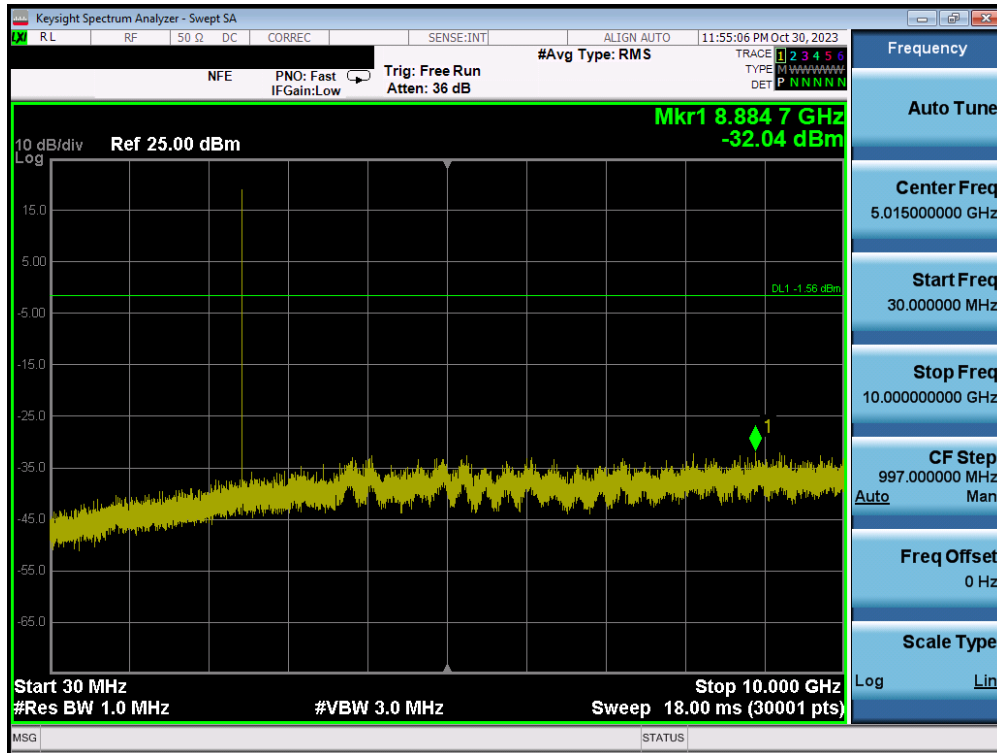


Plot 7-149. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 39) – ANT2

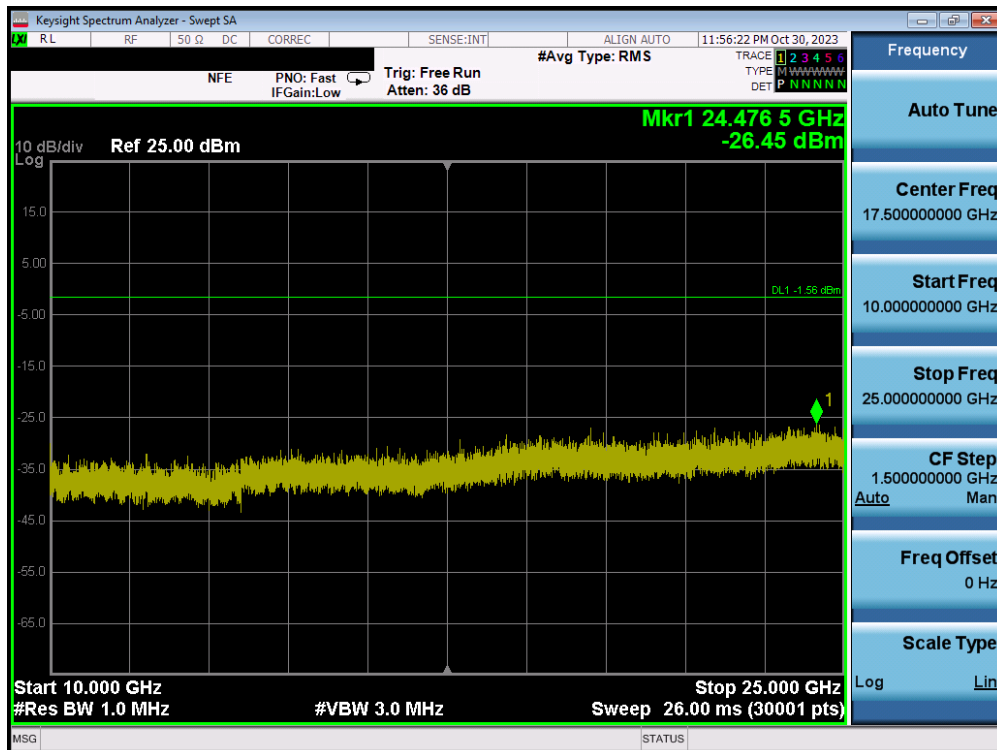


Plot 7-150. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 39) – ANT2

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 102 of 138

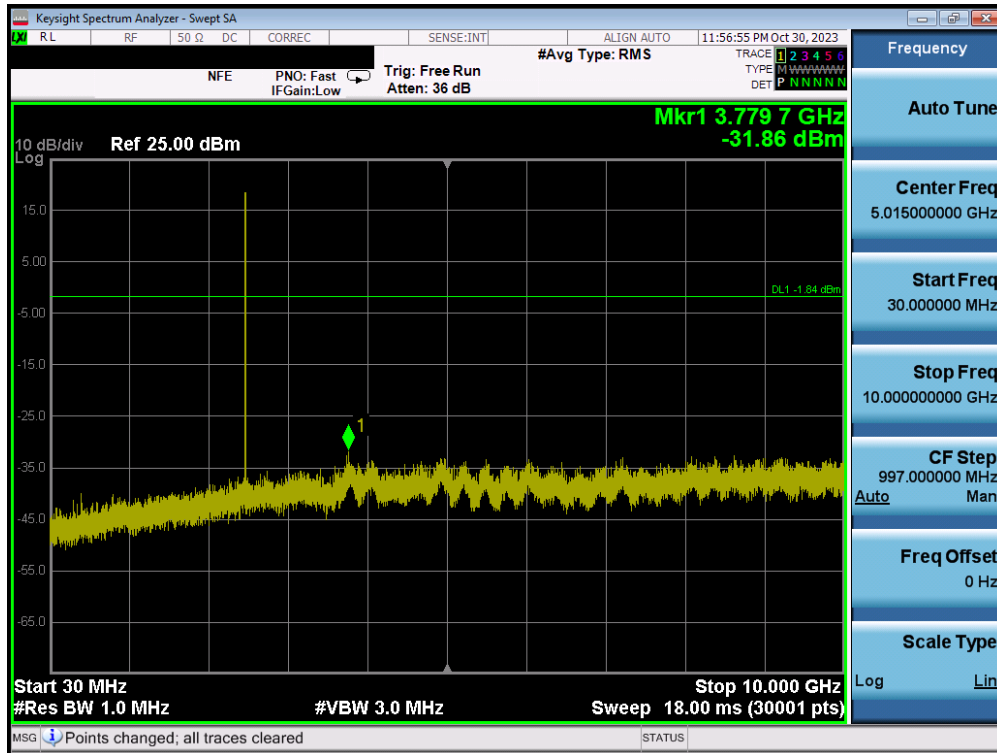


Plot 7-151. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 78) – ANT2

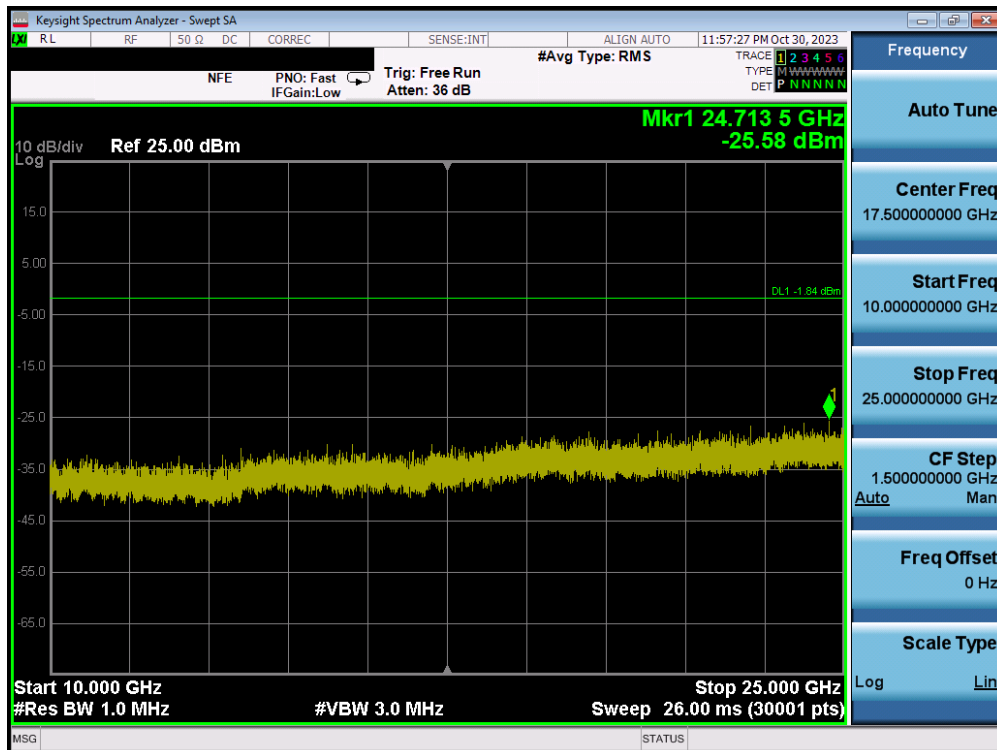


Plot 7-152. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 78) – ANT2

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 103 of 138

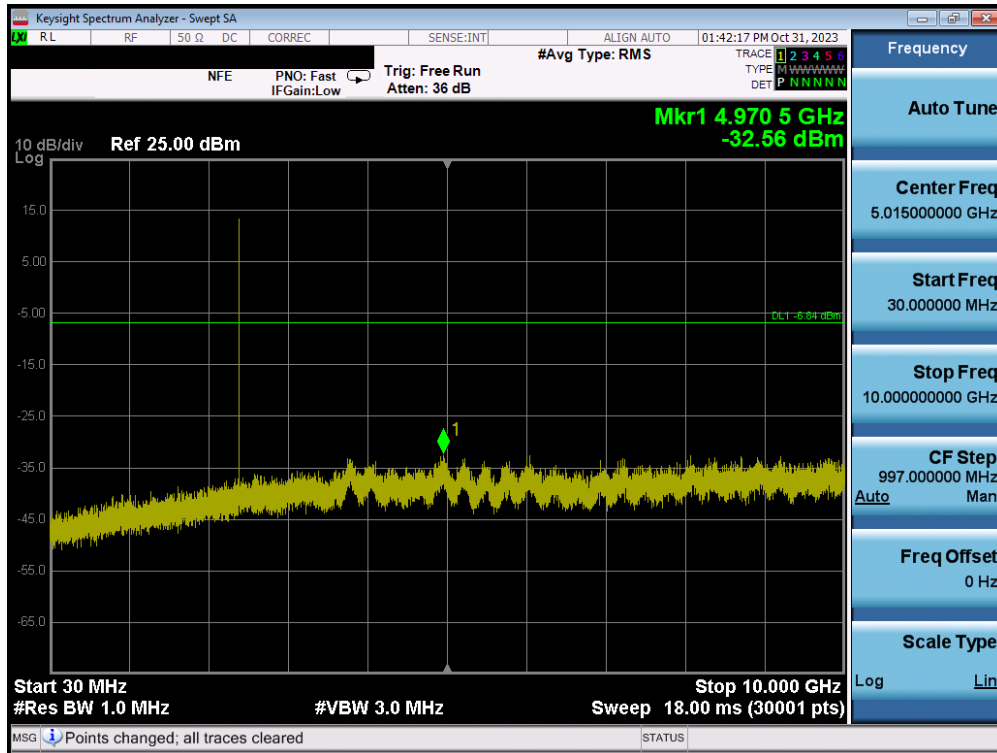


Plot 7-153. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 0) – Dual ANT1

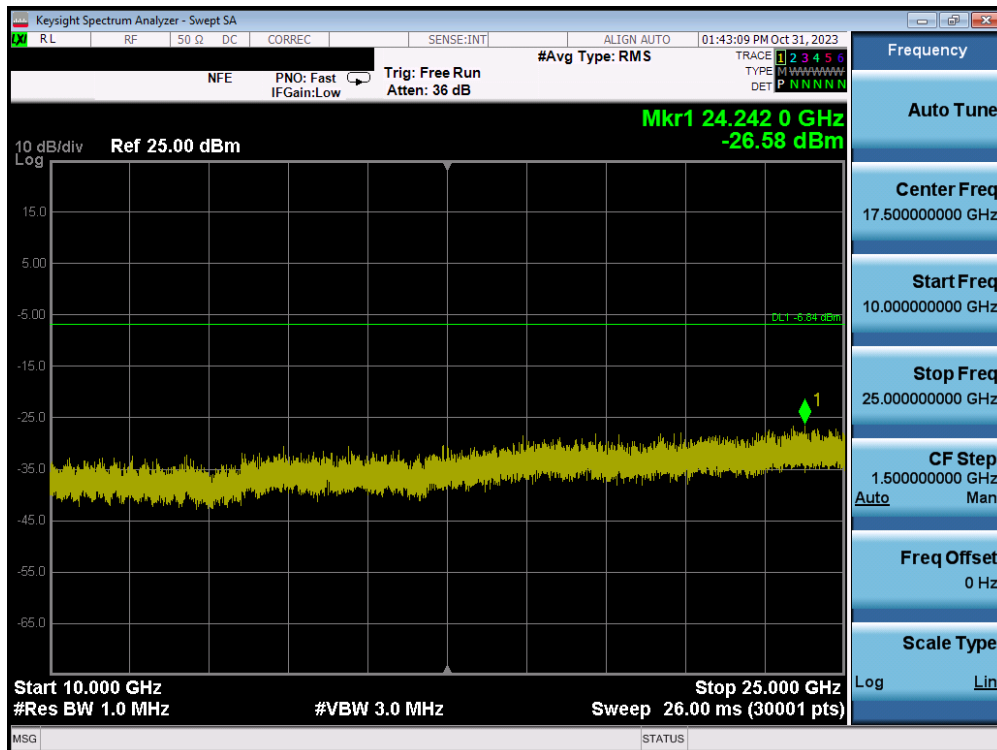


Plot 7-154. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 0) – Dual ANT1

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 104 of 138



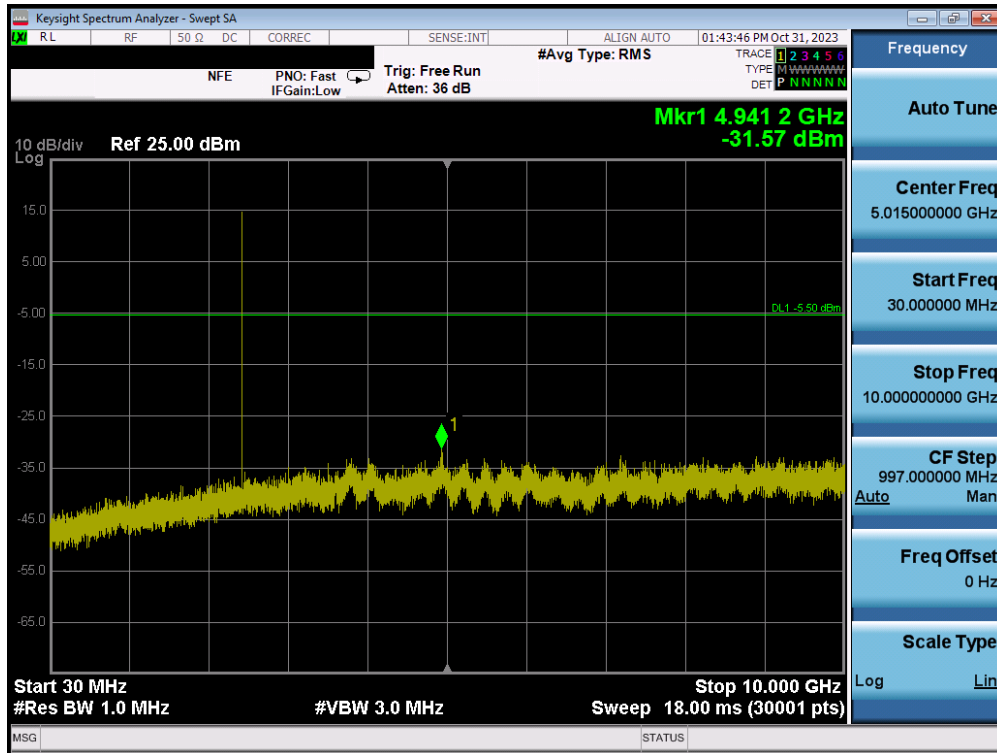


Plot 7-155. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 39) – Dual ANT1

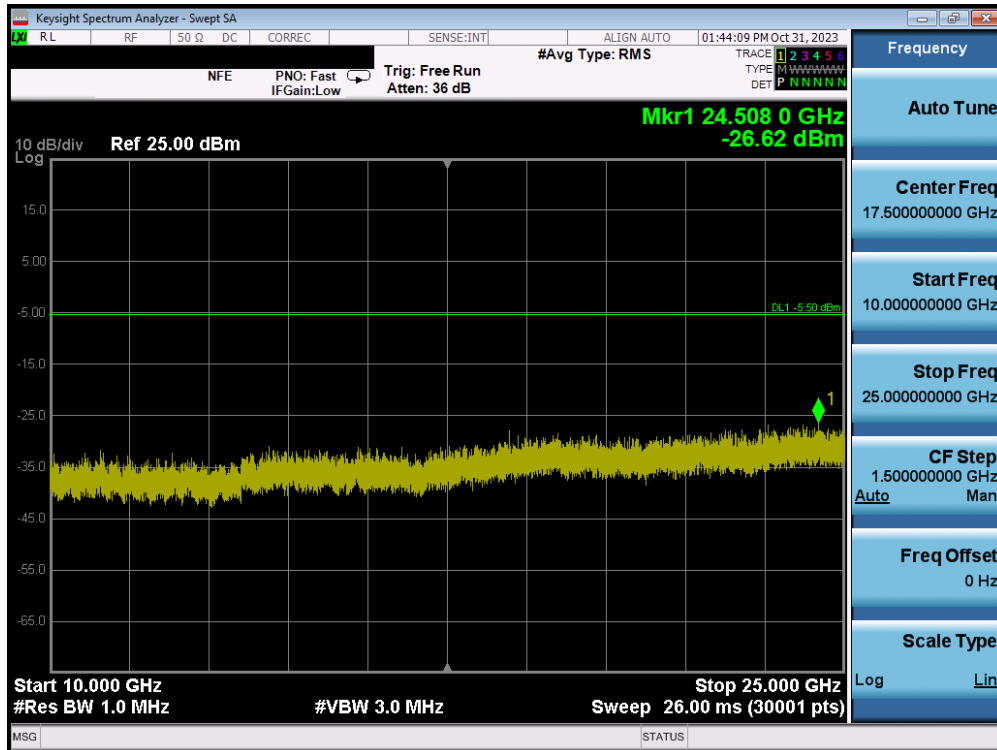


Plot 7-156. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 39) – Dual ANT1

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 105 of 138

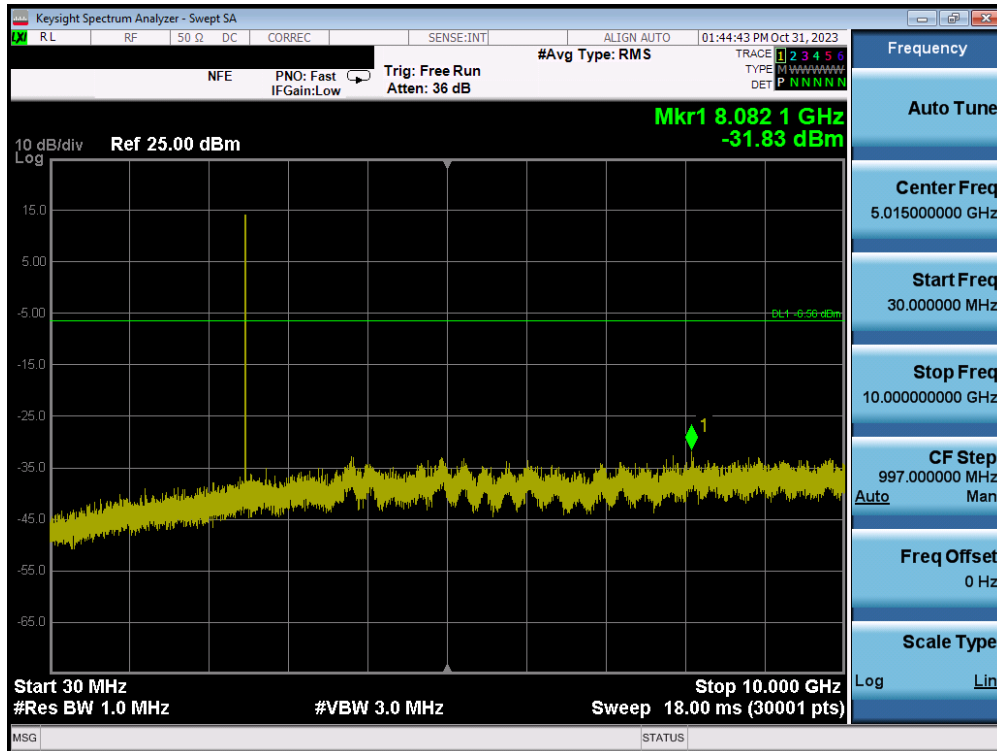


Plot 7-157. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 78) – Dual ANT1

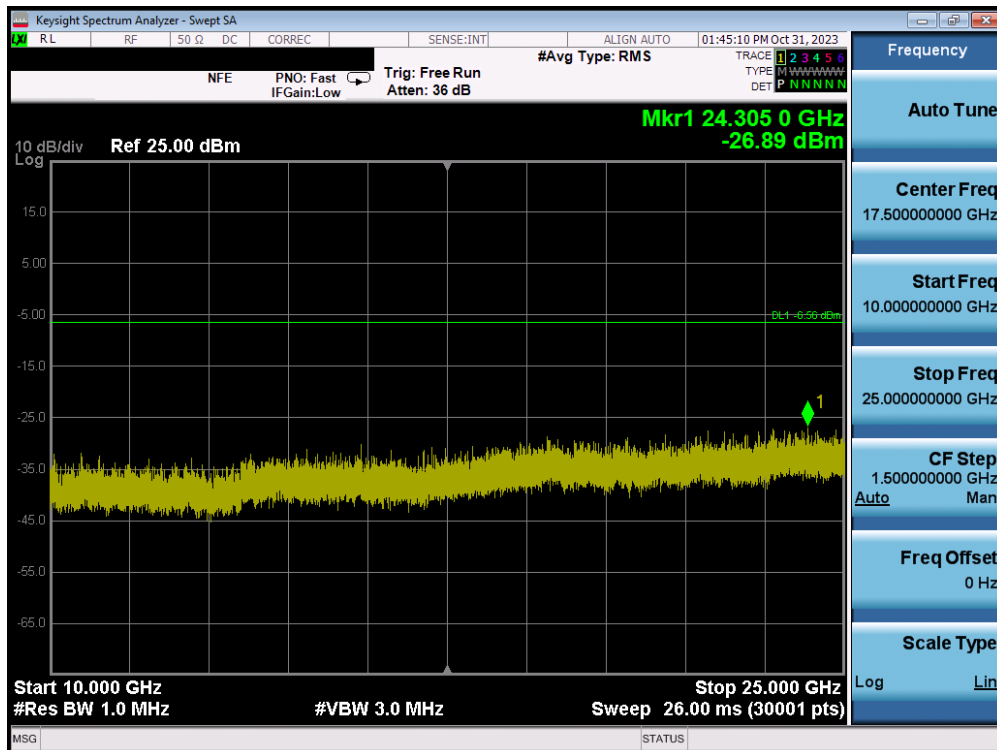


Plot 7-158. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 78) – Dual ANT1

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 106 of 138

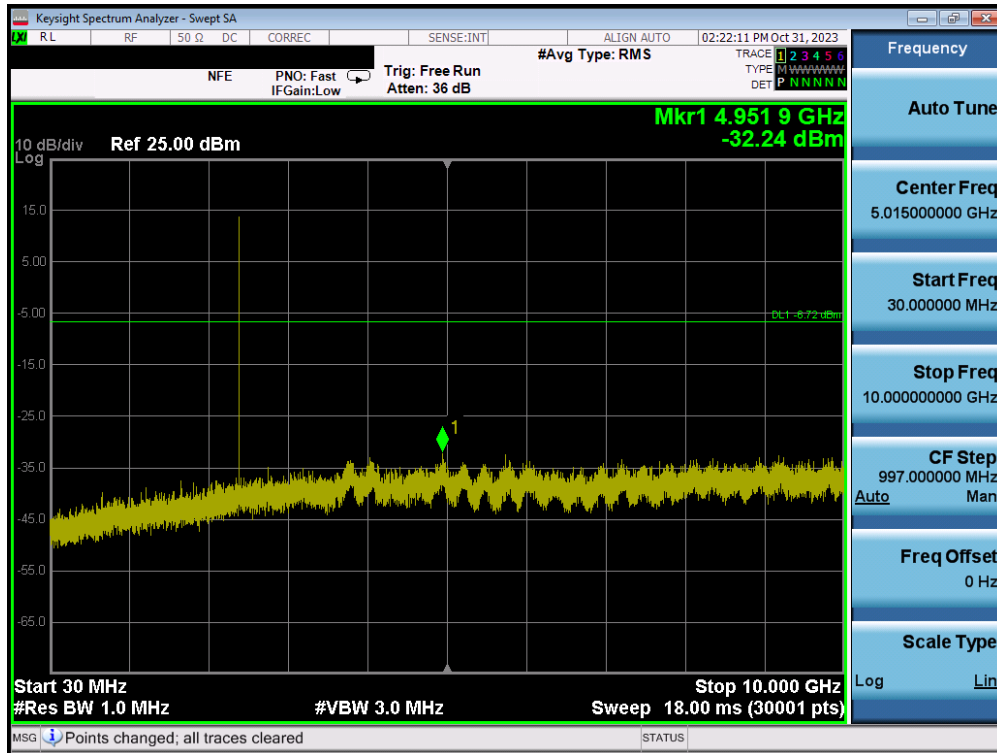


Plot 7-159. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 0) – Dual ANT2

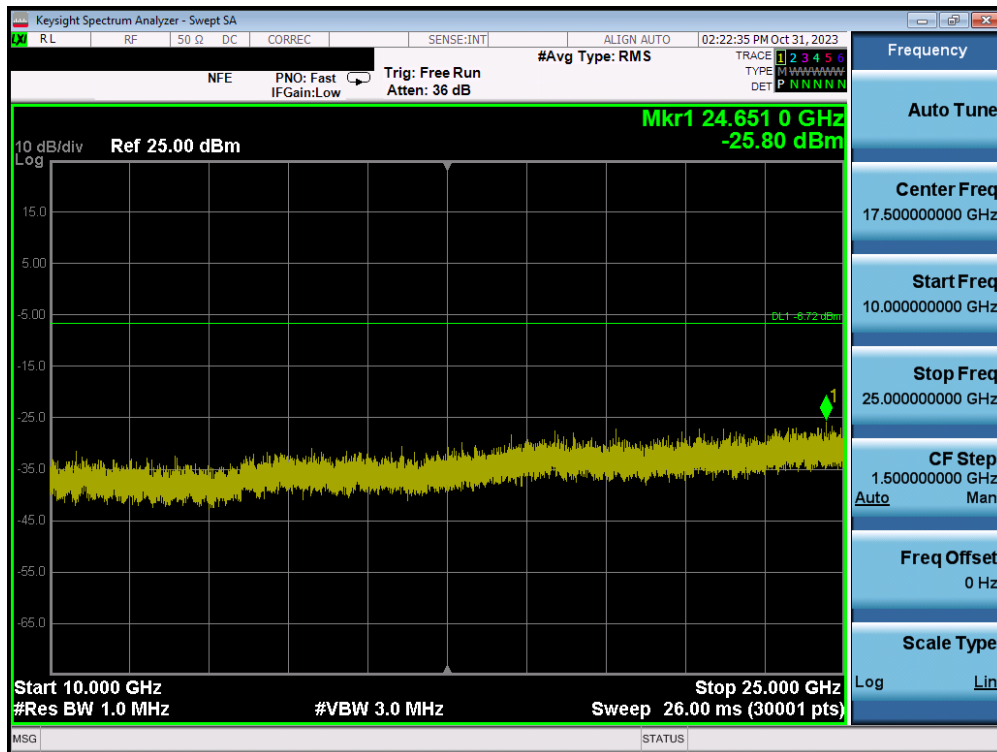


Plot 7-160. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 0) – Dual ANT2

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 107 of 138

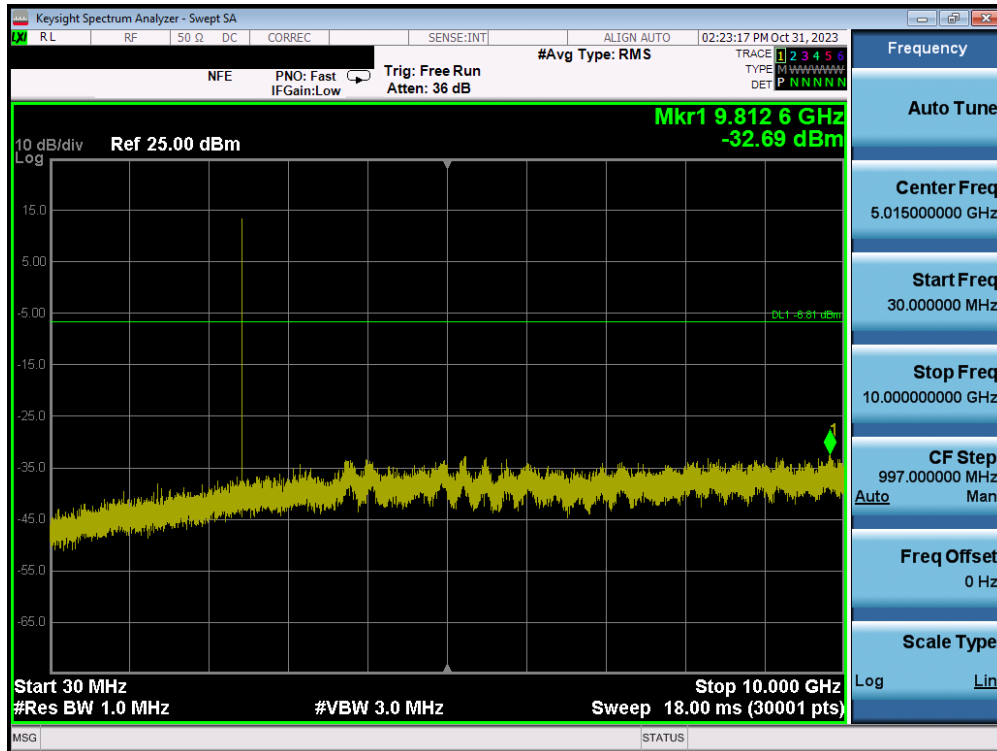


Plot 7-161. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 39) – Dual ANT2

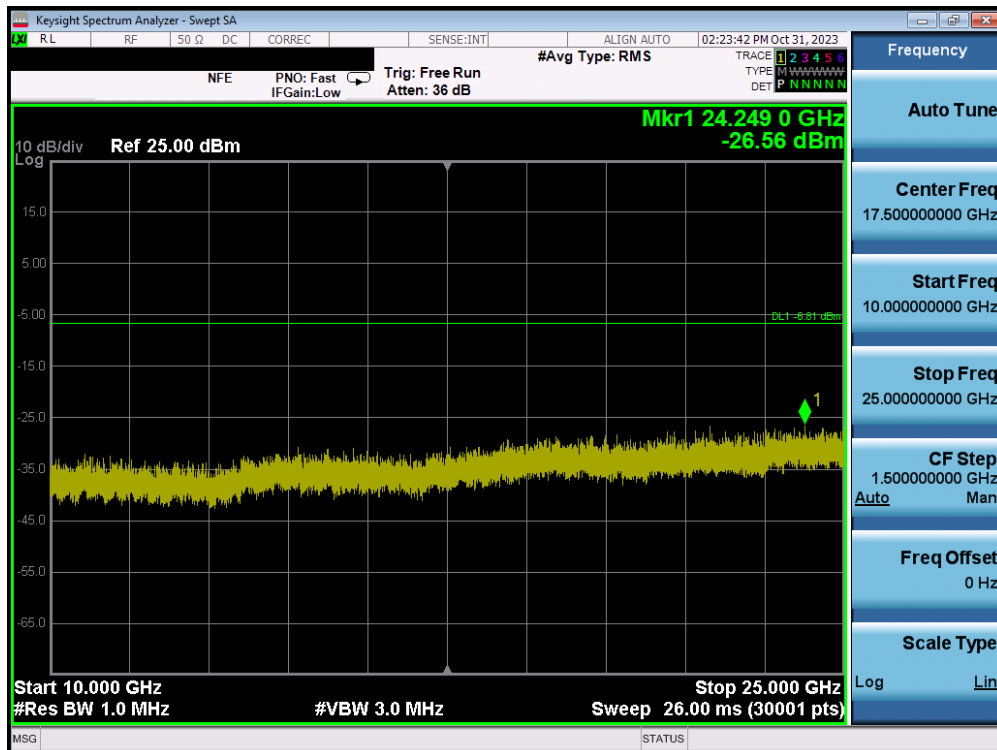


Plot 7-162. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 39) – Dual ANT2

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 108 of 138

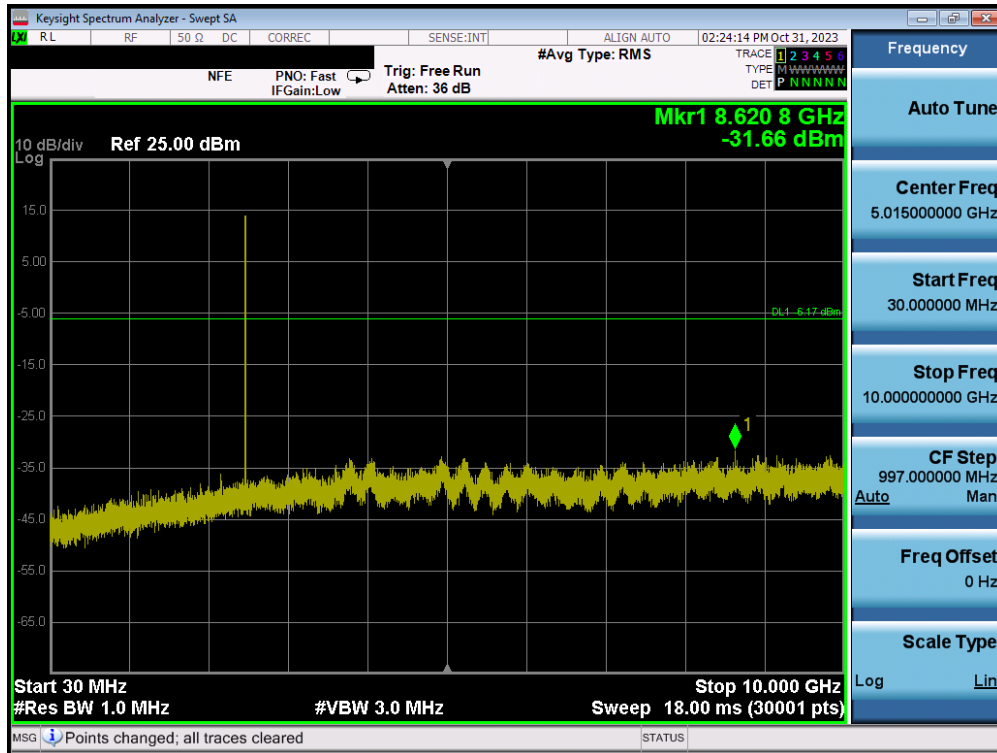

Plot 7-163. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 78) – Dual ANT2

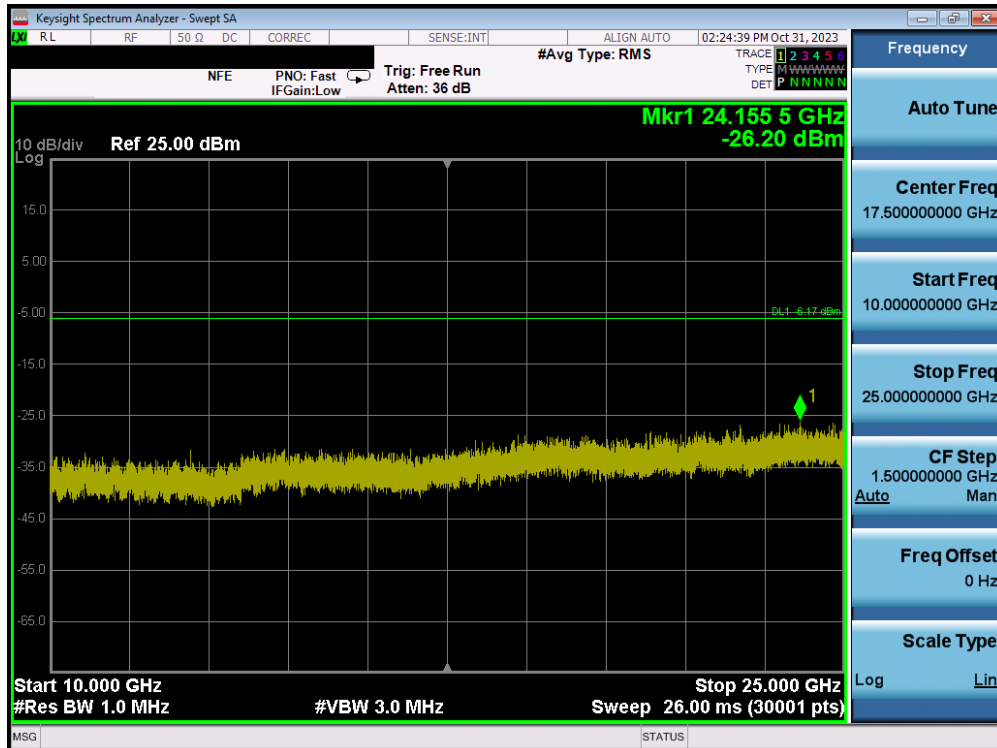

Plot 7-164. Conducted Spurious Plot (Bluetooth, 1Mbps – Ch. 78) – Dual ANT2

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 109 of 138



## 7.9 Radiated Spurious Emission Measurements – Above 1GHz

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown below per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-13. Radiated Limits

### Test Procedure Used

ANSI C63.10-2013 – Section 6.6.4.3

### Test Settings

#### Average Field Strength Measurements per Section 4.1.4.2.3 of ANSI C63.10-2013

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 1kHz  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to stabilize

#### Peak Field Strength Measurements per Section 4.1.4.2.2 of ANSI C63.10-2013

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in Table 7-14 below
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 110 of 138

Frequency	RBW
9 – 150kHz	200 – 300Hz
0.15 – 30MHz	9 – 10kHz
30 – 1000MHz	100 – 120kHz
> 1000MHz	1MHz

**Table 7-14. RBW as a Function of Frequency**

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

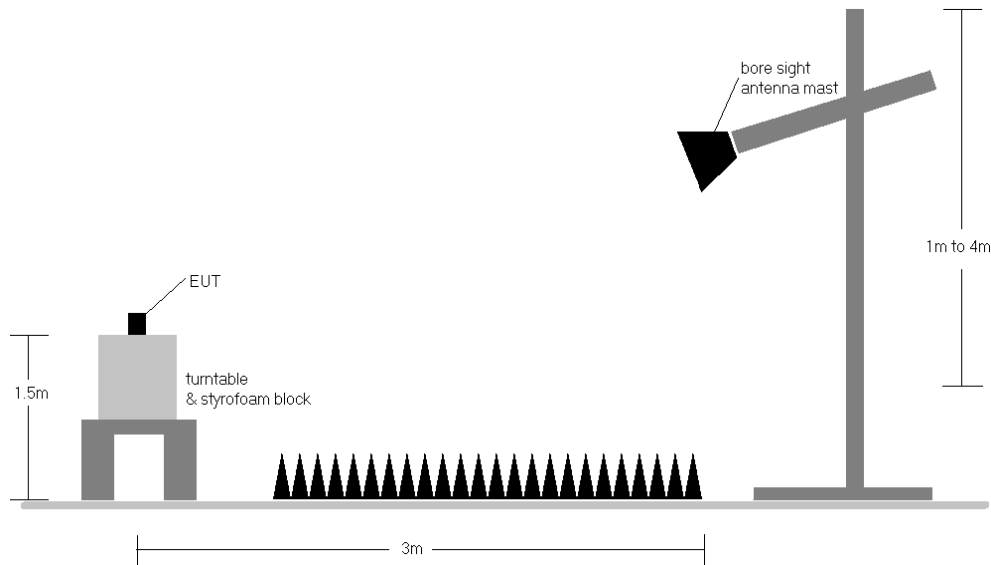

**Figure 7-8. Radiated Test Setup >1GHz**

### Test Notes

1. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in §15.209.
2. No significant radiated emissions were found in the 2310 - 2390MHz restricted band.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
6. The duty cycle correction factor was not applied to noise floor measurements.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables is used to denote a noise floor measurement.

FCC ID: A3LSMS928B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 111 of 138	

**Sample Calculation**

- Field Strength Level  $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]} + \text{Duty Cycle Correction }_{[dB]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

**Duty Cycle Correction Factor Calculation**


- Channel hop rate = 800 hops/second (AFH Mode)
- Adjusted channel hop rate for DH5 mode = 133.33 hops/second
- Time per channel hop =  $1 / 133.33 \text{ hops/second} = 7.50 \text{ ms}$
- Time to cycle through all channels =  $7.50 \times 20 \text{ channels} = 150 \text{ ms}$
- Number of times transmitter hits on one channel =  $100 \text{ ms} / 150 \text{ ms} = 1 \text{ time(s)}$
- Worst case dwell time = 7.5 ms
- Duty cycle correction factor =  $20\log_{10}(7.5\text{ms}/100\text{ms}) = -22.5 \text{ dB}$

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 112 of 138




## Radiated Spurious Emission Measurements – ANT1


§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

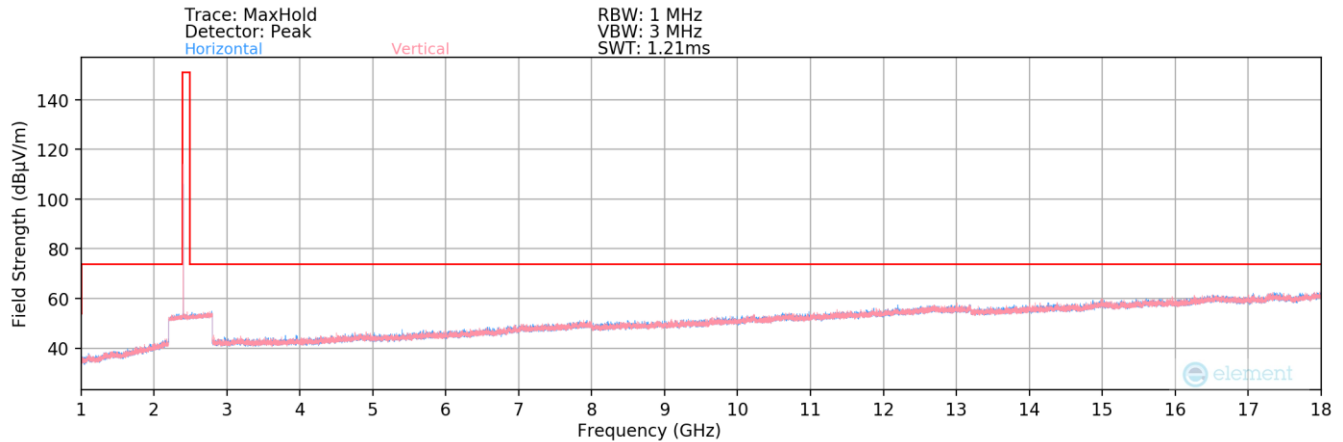

Plot 7-165. Radiated Spurious Plot above 1GHz (BT– Ch. 0) – ANT1

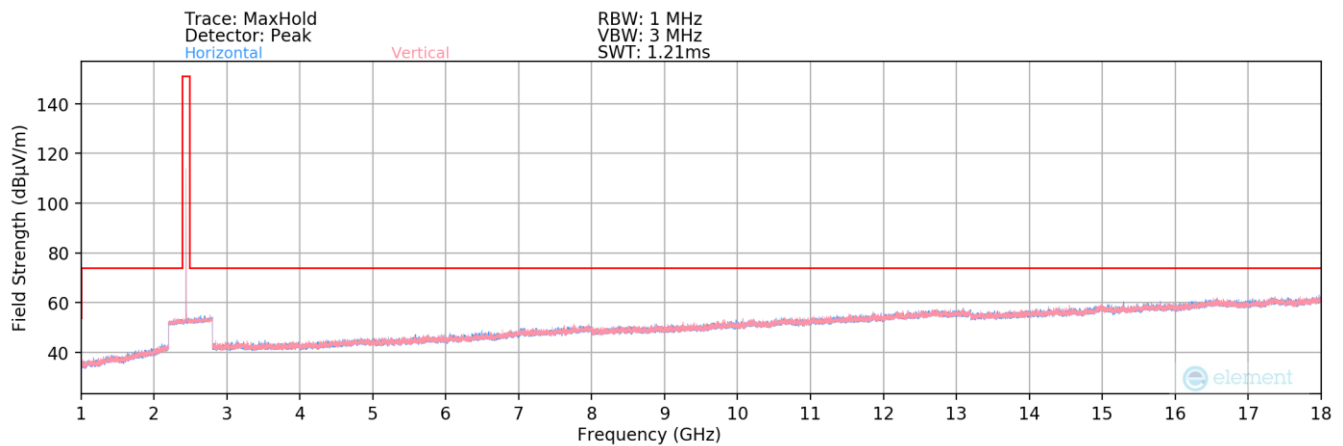


Plot 7-166. Radiated Spurious Plot above 1GHz (BT– Ch. 39) – ANT1

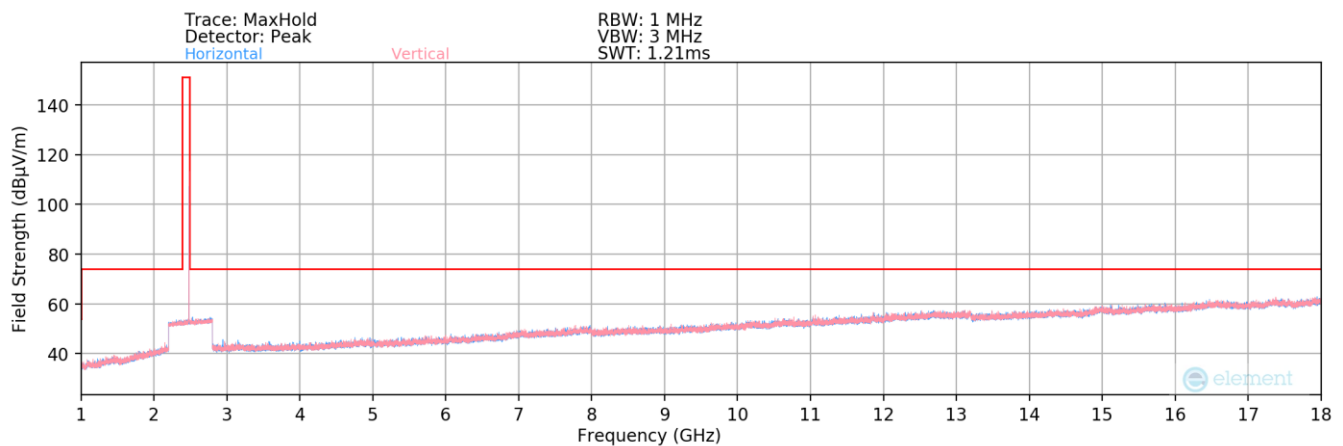

Plot 7-167. Radiated Spurious Plot above 1GHz (BT– Ch. 78) – ANT1

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 113 of 138

**Radiated Spurious Emissions Measurements (Above 18GHz) – ANT1**  
**§15.209; RSS-Gen [8.9]**

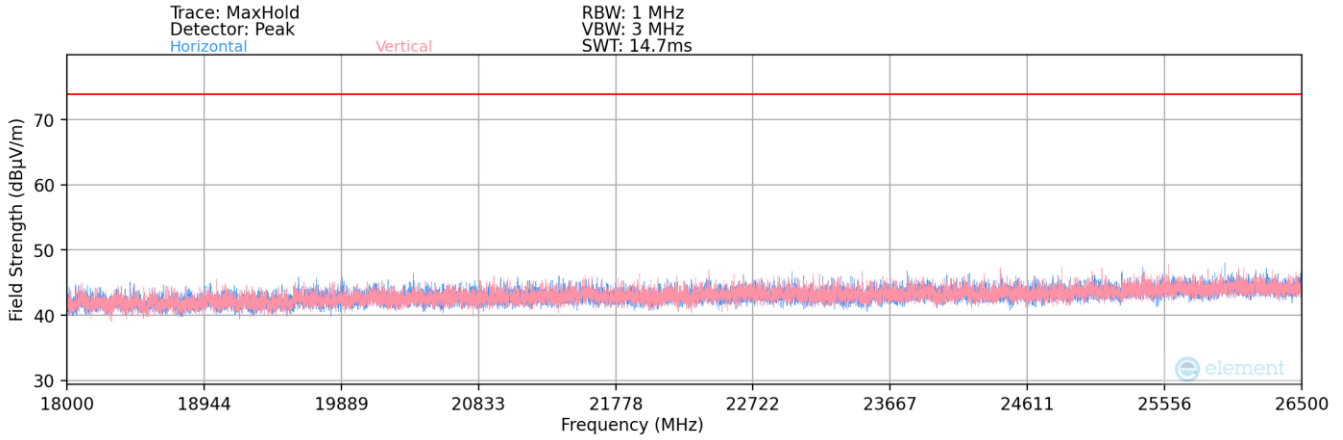

**Plot 7-168. Radiated Spurious Plot above 18GHz – ANT1**

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 114 of 138



**Radiated Spurious Emission Measurements – ANT1**  
**§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]**

Worst Case Mode: Bluetooth  
 Worst Case Data Rate: 1 Mbps  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2402MHz  
 Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Avg	H	128	342	-75.98	6.82	-22.50	15.34	53.98	-38.64
4804.00	Peak	H	128	342	-66.63	6.82	0.00	47.19	73.98	-26.79
12010.00	Avg	H	-	-	-81.92	18.59	0.00	43.67	53.98	-10.31
12010.00	Peak	H	-	-	-70.36	18.59	0.00	55.23	73.98	-18.75

**Table 7-15. Radiated Measurements – ANT1**

Worst Case Mode: Bluetooth  
 Worst Case Data Rate: 1 Mbps  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2441MHz  
 Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4882.00	Avg	H	139	336	-74.81	7.13	-22.50	16.82	53.98	-37.16
4882.00	Peak	H	139	336	-65.80	7.13	0.00	48.33	73.98	-25.65
7323.00	Avg	H	-	-	-80.89	12.36	0.00	38.47	53.98	-15.51
7323.00	Peak	H	-	-	-69.66	12.36	0.00	49.70	73.98	-24.28
12205.00	Avg	H	-	-	-82.12	19.15	0.00	44.03	53.98	-9.95
12205.00	Peak	H	-	-	-71.25	19.15	0.00	54.90	73.98	-19.08

**Table 7-16. Radiated Measurements – ANT1**

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 115 of 138



Worst Case Mode: Bluetooth  
 Worst Case Data Rate: 1 Mbps  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2480MHz  
 Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	145	325	-72.89	6.82	-22.50	18.43	53.98	-35.55
4960.00	Peak	H	145	325	-65.33	6.82	0.00	48.49	73.98	-25.49
7440.00	Avg	H	-	-	-80.51	12.34	0.00	38.83	53.98	-15.15
7440.00	Peak	H	-	-	-69.31	12.34	0.00	50.03	73.98	-23.95
12400.00	Avg	H	-	-	-82.11	19.13	0.00	44.02	53.98	-9.96
12400.00	Peak	H	-	-	-71.25	19.13	0.00	54.88	73.98	-19.10

Table 7-17. Radiated Measurements – ANT1

Worst Case Mode: Bluetooth  
 Worst Case Data Rate: 1 Mbps  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2480MHz  
 Channel: 78


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	117	339	-76.12	6.82	-22.50	15.20	53.98	-38.78
4960.00	Peak	H	117	339	-66.61	6.82	0.00	47.21	73.98	-26.77
7440.00	Avg	H	-	-	-80.88	12.34	0.00	38.46	53.98	-15.52
7440.00	Peak	H	-	-	-69.30	12.34	0.00	50.04	73.98	-23.94
12400.00	Avg	H	-	-	-82.12	19.13	0.00	44.01	53.98	-9.97
12400.00	Peak	H	-	-	-71.43	19.13	0.00	54.70	73.98	-19.28

Table 7-18. Radiated Measurements with WCP – ANT1


FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 116 of 138

## Radiated Spurious Emission Measurements – ANT2


§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

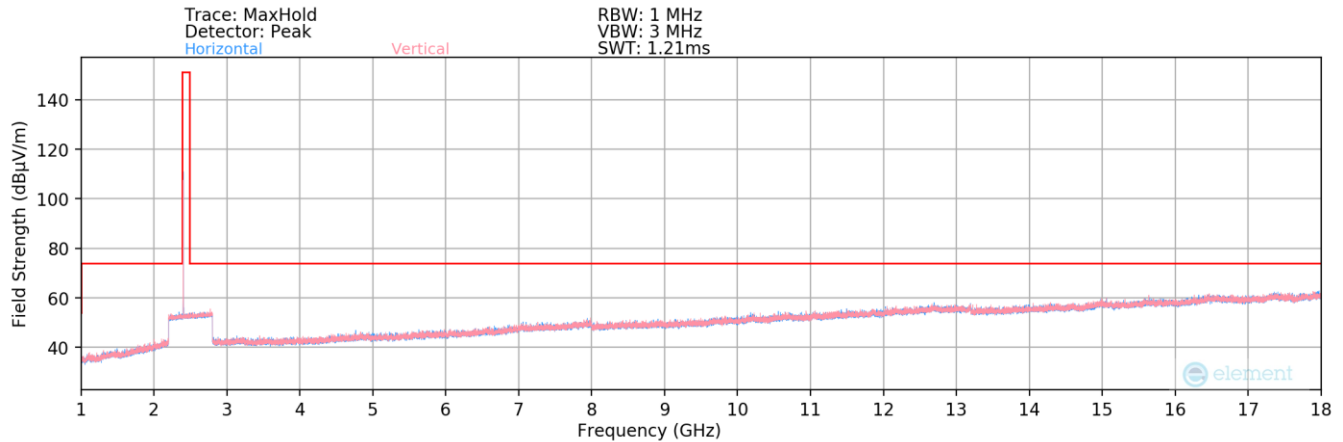

Plot 7-169. Radiated Spurious Plot above 1GHz (BT– Ch. 0) – ANT2

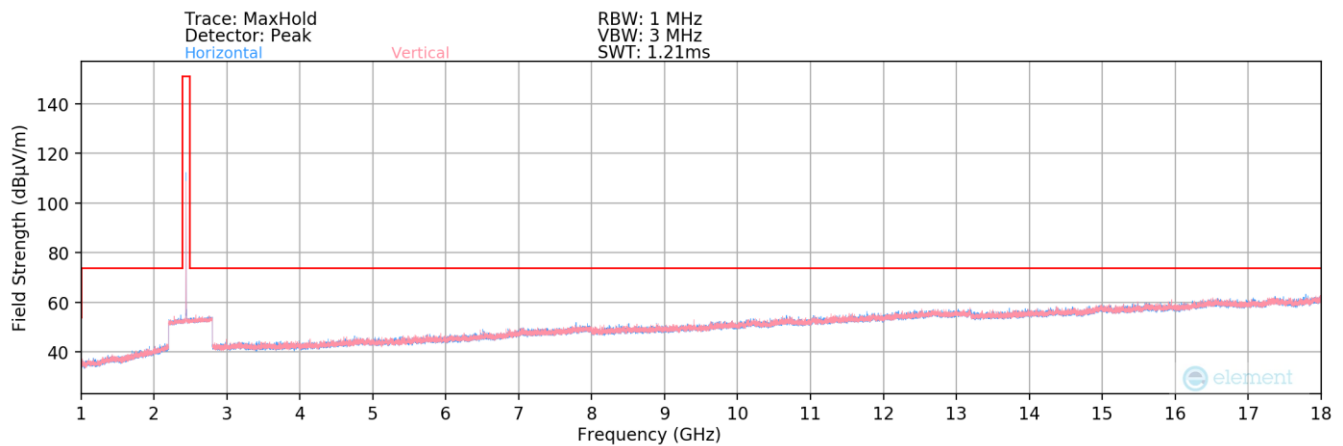

Plot 7-170. Radiated Spurious Plot above 1GHz (BT– Ch. 39) – ANT2

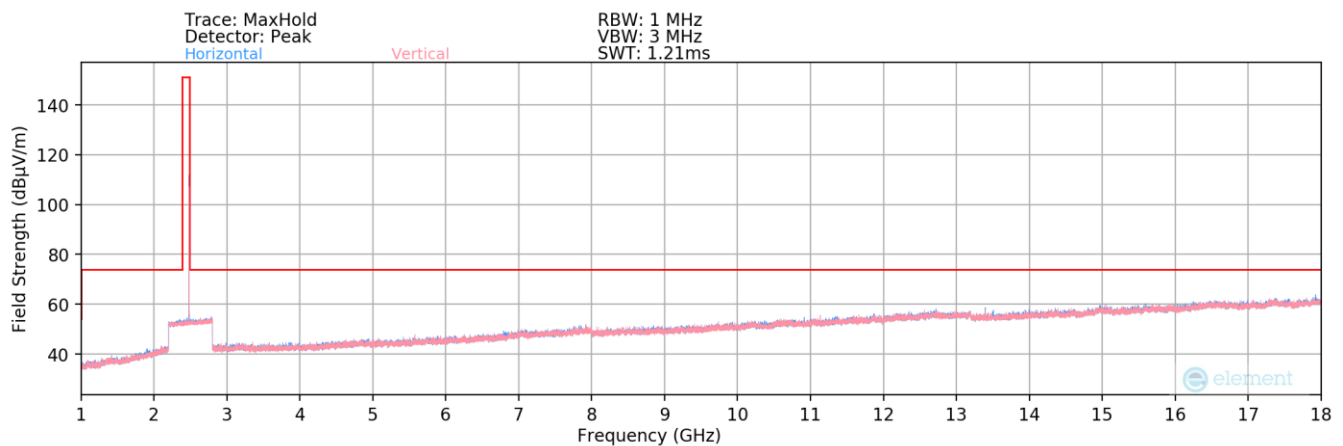


Plot 7-171. Radiated Spurious Plot above 1GHz (BT– Ch. 78) – ANT2

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 117 of 138



**Radiated Spurious Emissions Measurements (Above 18GHz) – ANT2**  
**§15.209; RSS-Gen [8.9]**

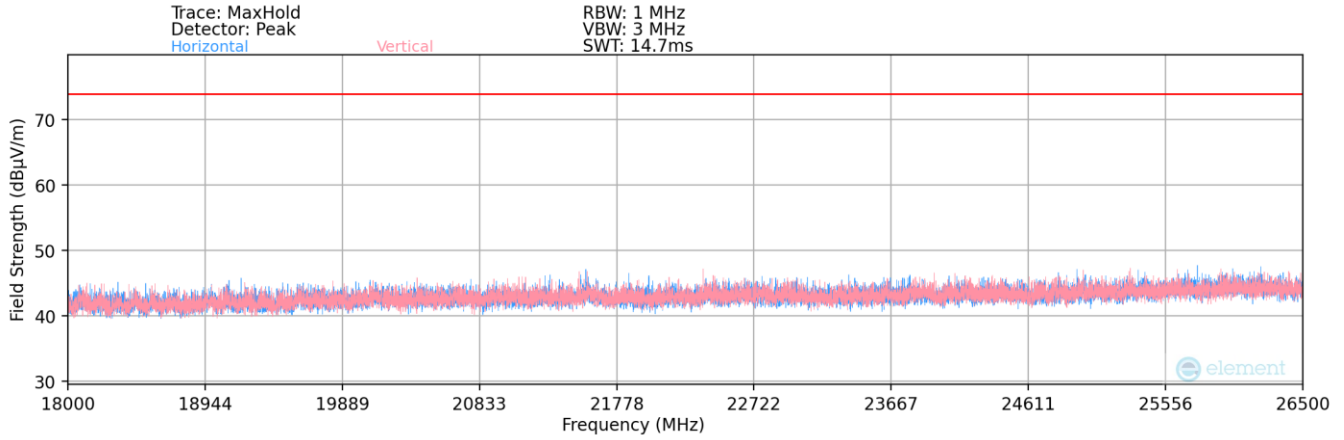

**Plot 7-172. Radiated Spurious Plot above 18GHz – ANT2**

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 118 of 138



## Radiated Spurious Emission Measurements – ANT2

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

Worst Case Mode: Bluetooth  
 Worst Case Data Rate: 1 Mbps  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2402MHz  
 Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Avg	H	135	335	-79.92	6.82	-22.50	11.40	53.98	-42.58
4804.00	Peak	H	135	335	-68.11	6.82	0.00	45.71	73.98	-28.27
12010.00	Avg	H	-	-	-81.85	18.59	0.00	43.74	53.98	-10.24
12010.00	Peak	H	-	-	-70.60	18.59	0.00	54.99	73.98	-18.99

Table 7-19. Radiated Measurements – ANT2

Worst Case Mode: Bluetooth  
 Worst Case Data Rate: 1 Mbps  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2441MHz  
 Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4882.00	Avg	H	-	-	-79.62	7.13	34.51	53.98	-19.47
4882.00	Peak	H	-	-	-67.77	7.13	46.36	73.98	-27.62
7323.00	Avg	H	-	-	-80.72	12.36	38.64	53.98	-15.34
7323.00	Peak	H	-	-	-68.77	12.36	50.59	73.98	-23.39
12205.00	Avg	H	-	-	-82.08	19.15	44.07	53.98	-9.91
12205.00	Peak	H	-	-	-69.91	19.15	56.24	73.98	-17.74

Table 7-20. Radiated Measurements – ANT2

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 119 of 138



Worst Case Mode: Bluetooth  
 Worst Case Data Rate: 1 Mbps  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2480MHz  
 Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4960.00	Avg	H	-	-	-79.65	6.82	34.17	53.98	-19.81
4960.00	Peak	H	-	-	-67.96	6.82	45.86	73.98	-28.12
7440.00	Avg	H	-	-	-80.82	12.34	38.52	53.98	-15.46
7440.00	Peak	H	-	-	-69.21	12.34	50.13	73.98	-23.85
12400.00	Avg	H	-	-	-82.14	19.13	43.99	53.98	-9.99
12400.00	Peak	H	-	-	-70.67	19.13	55.46	73.98	-18.52


**Table 7-21. Radiated Measurements – ANT2**

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 120 of 138




## Radiated Spurious Emission Measurements – Dual


§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

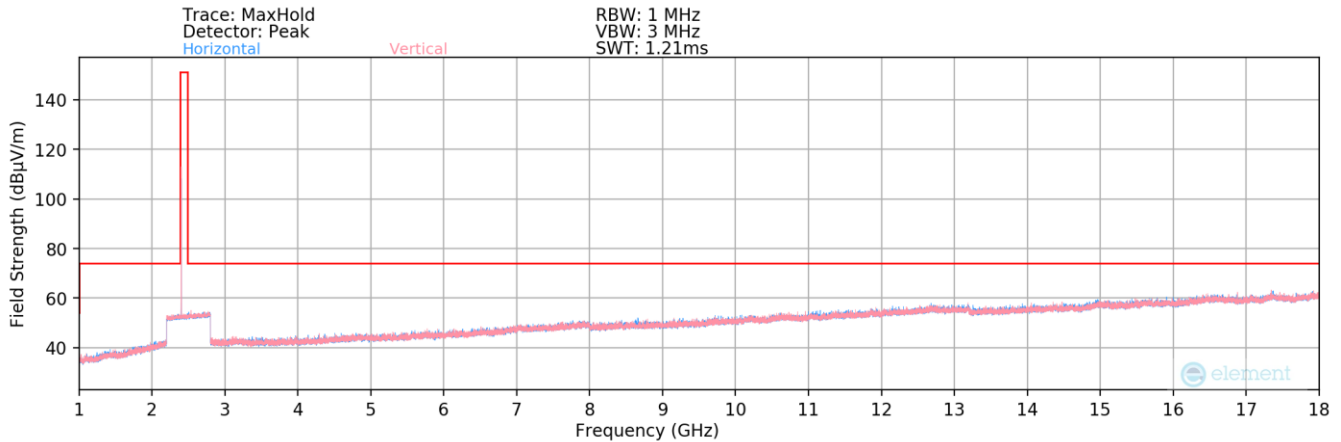

Plot 7-173. Radiated Spurious Plot above 1GHz (BT– Ch. 0) – Dual

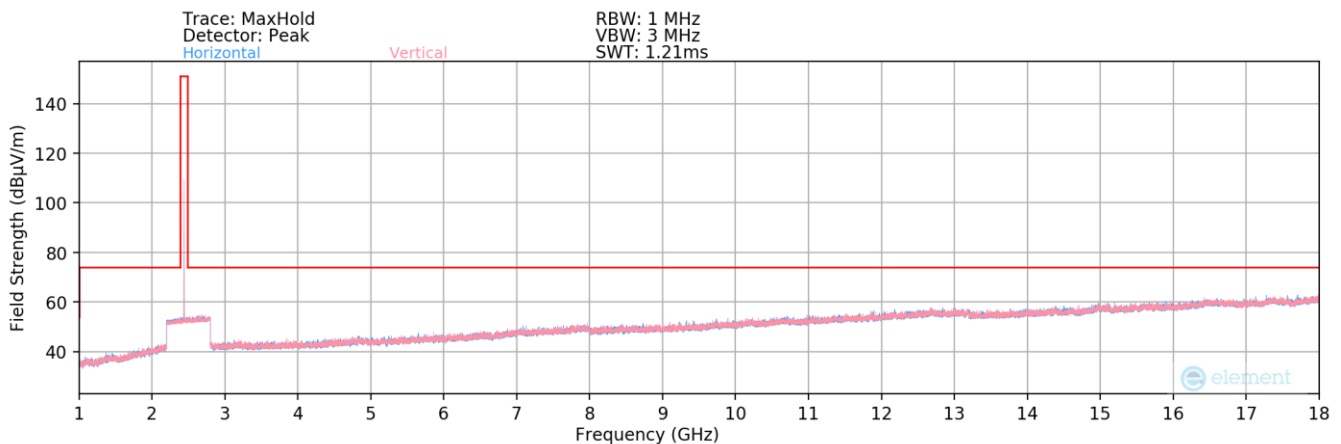

Plot 7-174. Radiated Spurious Plot above 1GHz (BT– Ch. 39) – Dual

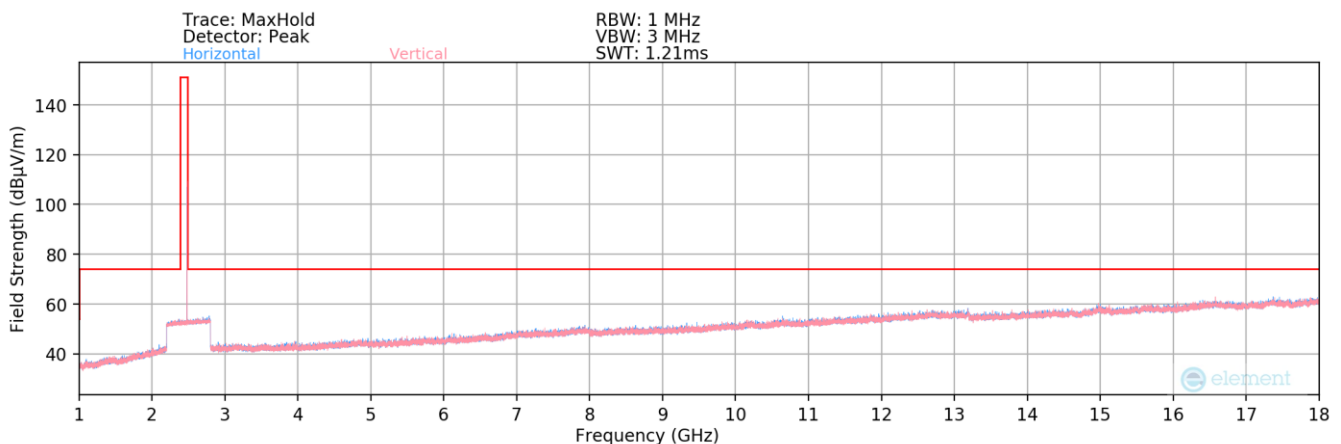


Plot 7-175. Radiated Spurious Plot above 1GHz (BT– Ch. 78) – Dual

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 121 of 138

## Radiated Spurious Emissions Measurements (Above 18GHz) – Dual

§15.209; RSS-Gen [8.9]

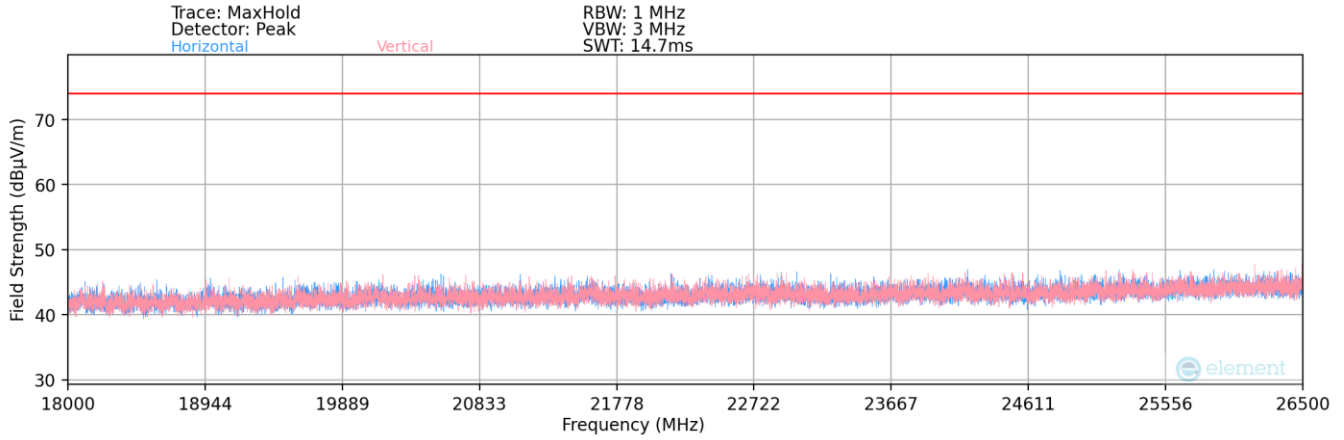

**Plot 7-176. Radiated Spurious Plot above 18GHz – Dual**

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 122 of 138



**Radiated Spurious Emission Measurements – Dual**  
**§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]**

Worst Case Mode: Bluetooth  
 Worst Case Data Rate: 1 Mbps  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2402MHz  
 Channel: 0

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4804.00	Avg	H	193	109	-79.38	6.82	-22.50	11.94	53.98	-42.04
4804.00	Peak	H	193	109	-67.86	6.82	0.00	45.96	73.98	-28.02
12010.00	Avg	H	-	-	-81.86	18.59	0.00	43.73	53.98	-10.25
12010.00	Peak	H	-	-	-70.74	18.59	0.00	54.85	73.98	-19.13

**Table 7-22. Radiated Measurements – Dual**

Worst Case Mode: Bluetooth  
 Worst Case Data Rate: 1 Mbps  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2441MHz  
 Channel: 39

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4882.00	Avg	H	140	338	-74.72	7.13	-22.50	16.91	53.98	-37.07
4882.00	Peak	H	140	338	-65.44	7.13	0.00	48.69	73.98	-25.29
7323.00	Avg	H	-	-	-80.76	12.36	0.00	38.60	53.98	-15.38
7323.00	Peak	H	-	-	-68.72	12.36	0.00	50.64	73.98	-23.34
12205.00	Avg	H	-	-	-81.82	19.15	0.00	44.33	53.98	-9.65
12205.00	Peak	H	-	-	-71.07	19.15	0.00	55.08	73.98	-18.90

**Table 7-23. Radiated Measurements – Dual**

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 123 of 138



Worst Case Mode: Bluetooth  
 Worst Case Data Rate: 1 Mbps  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2480MHz  
 Channel: 78

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Duty Cycle Correction [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Avg	H	151	318	-73.14	6.82	-22.50	18.18	53.98	-35.80
4960.00	Peak	H	151	318	-65.43	6.82	0.00	48.39	73.98	-25.59
7440.00	Avg	H	-	-	-80.50	12.34	0.00	38.84	53.98	-15.14
7440.00	Peak	H	-	-	-69.09	12.34	0.00	50.25	73.98	-23.73
12400.00	Avg	H	-	-	-81.82	19.13	0.00	44.31	53.98	-9.67
12400.00	Peak	H	-	-	-70.42	19.13	0.00	55.71	73.98	-18.27

**Table 7-24. Radiated Measurements – Dual**

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 124 of 138

## 7.10 Radiated Restricted Band Edge Measurements

§15.205 §15.209 §15.247 (d); RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated emissions at the band edge are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power, at the appropriate frequencies, and with hopping disabled. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown below per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
Above 960.0 MHz	500	3

**Table 7-25. Radiated Limits**

### Test Procedure Used

ANSI C63.10-2013 – Section 6.10.5.2


### Test Settings

- Span is set large enough to capture the peak level of the emission operating on the channel closest to the band edge
- Reference level offset is set with the appropriate corrections for the frequencies shown in the plots
- Reference level is set to provide the appropriate amount of “head room” above the signal as specified in ANSI C63.10-2013 Section 4.1.5.2
- Attenuation is set to a low enough level to maintain enough dynamic range between the noise floor and the radiated limit
- Sweep time = Auto coupled
- RBW = 1MHz
- VBW = 3 x RBW for peak measurements and 1kHz for RMS measurements
- Detector = RMS and peak
- Trace = Max Hold
- Trace was allowed to stabilize

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 125 of 138

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

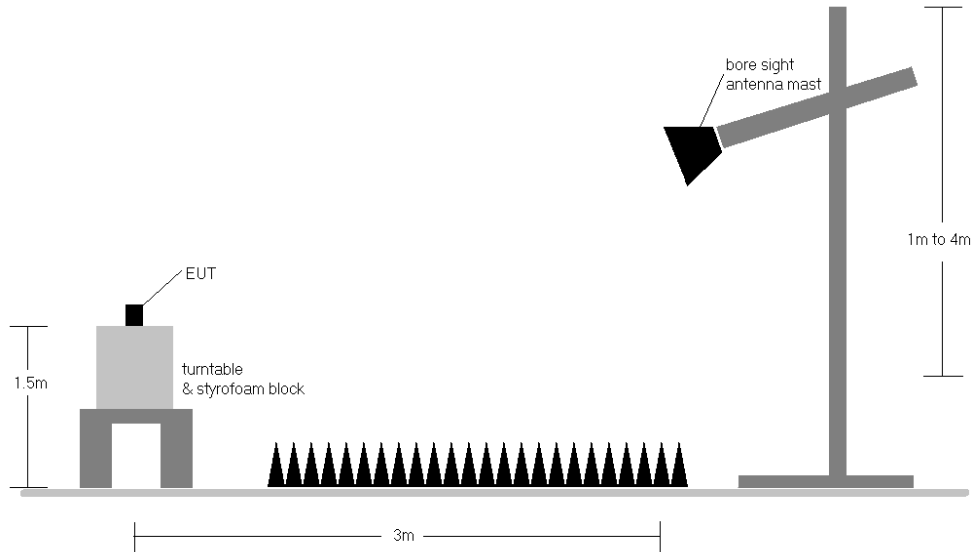

**Figure 7-9. Radiated Test Setup >1GHz**

### Test Notes

1. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limits shown in §15.209.
2. No significant radiated emissions were found in the 2310 - 2390MHz restricted band.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
6. Two different amplitude offsets were used depending on whether peak or average measurements were measured. The average measurements use a duty cycle correction factor (DCCF).

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain} + \text{DCCF}$$


7. The "-" shown in the following RSE tables is used to denote a noise floor measurement.

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 126 of 138




### Radiated Band Edge Measurement – ANT1


Worst Case Mode:	Bluetooth
Worst Case Data Rate:	1 Mbps
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

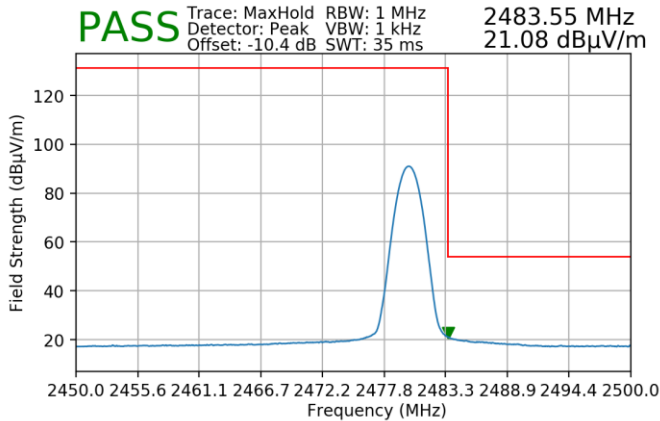


**Plot 7-177. Radiated Restricted Upper Band Edge Measurement (Average) – ANT1**

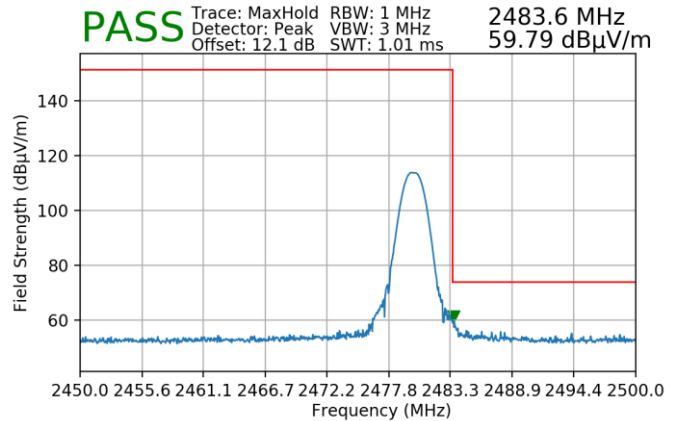

**Plot 7-178. Radiated Restricted Upper Band Edge Measurement (Peak) – ANT1**

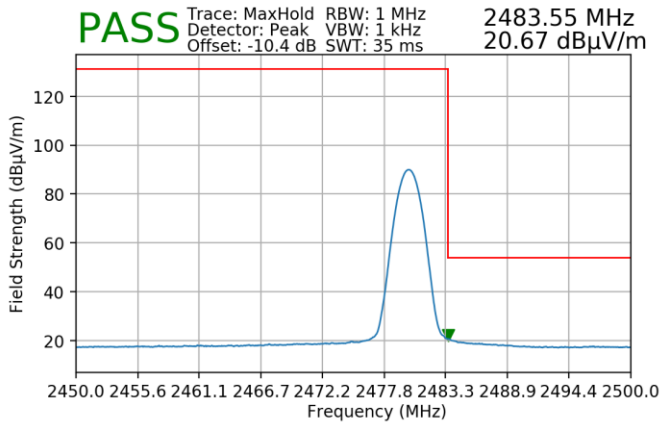

**Plot 7-179. Radiated Restricted Upper Band Edge Measurement (Average) – ANT1– WPT**

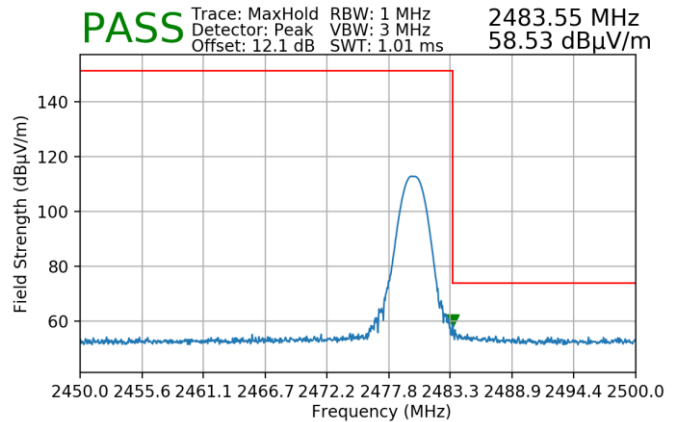


**Plot 7-180. Radiated Restricted Upper Band Edge Measurement (Peak) – ANT1– WPT**

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 127 of 138




### Radiated Band Edge Measurement – ANT2

Worst Case Mode:	Bluetooth
Worst Case Data Rate:	1 Mbps
Measurement Distance:	3 Meters
Operating Frequency:	2480MHz
Channel:	78

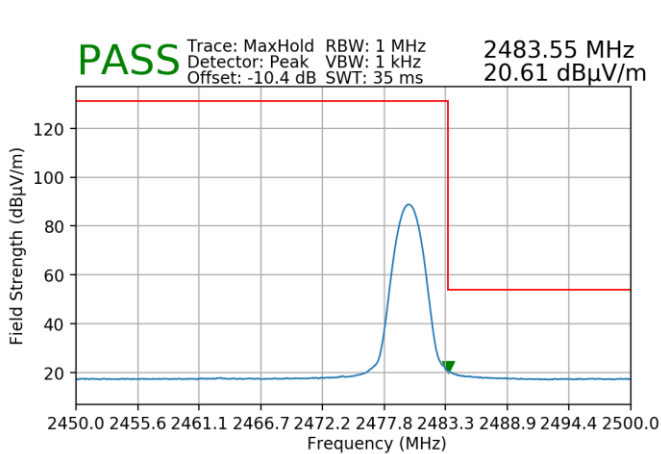

**Plot 7-181. Radiated Restricted Upper Band Edge Measurement (Average) – ANT2**

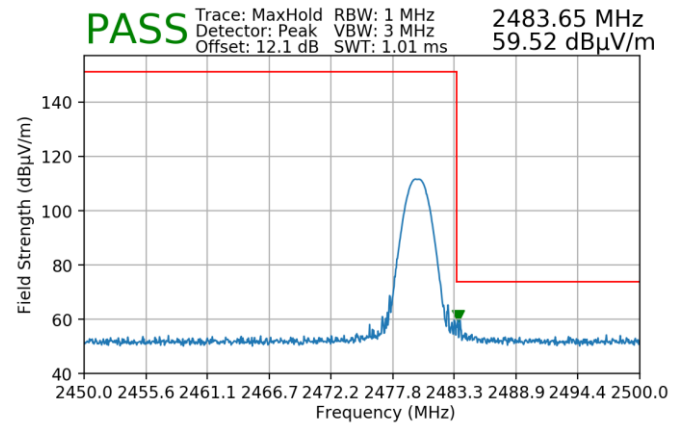

**Plot 7-182. Radiated Restricted Upper Band Edge Measurement (Peak) – ANT2**


FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 128 of 138






**Radiated Band Edge Measurement – Dual**

Worst Case Mode: Bluetooth  
 Worst Case Data Rate: 3 Mbps  
 Measurement Distance: 3 Meters  
 Operating Frequency: 2480MHz  
 Channel: 78

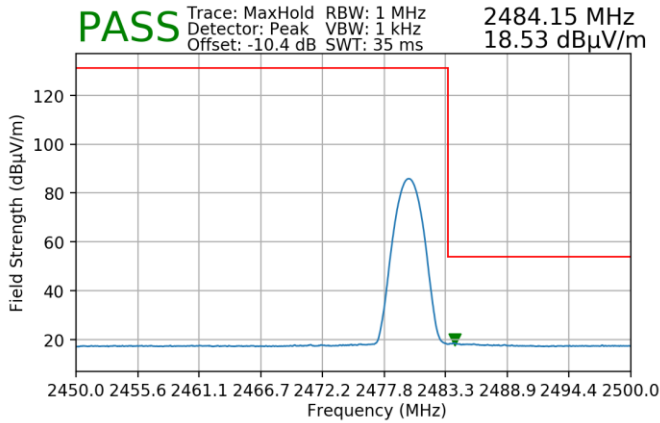

**Plot 7-183. Radiated Restricted Upper Band Edge Measurement (Average) – Dual**

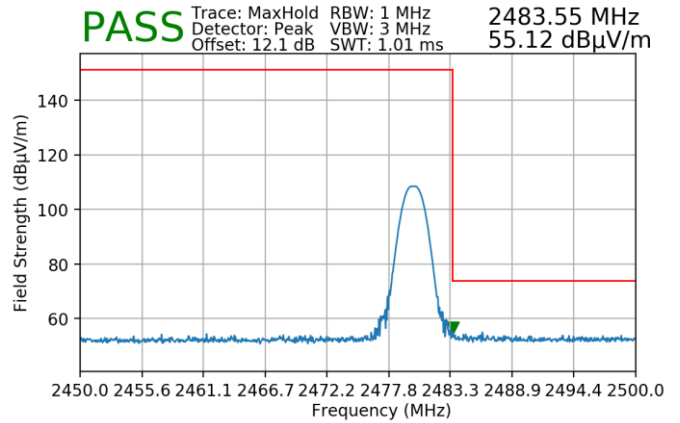

**Plot 7-184. Radiated Restricted Upper Band Edge Measurement (Peak) – Dual**

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 129 of 138



**7.11 Radiated Spurious Emissions Measurements – Below 1GHz**  
§15.209; RSS-Gen [8.9]

**Test Overview and Limit**

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

*All out of band emissions must not exceed the limits shown below per Section 15.209 and RSS-Gen (8.9).*

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-26. Radiated Limits**

**Test Procedures Used**

ANSI C63.10-2013

**Test Settings**


**Quasi-Peak Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize


FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 130 of 138

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagrams below.

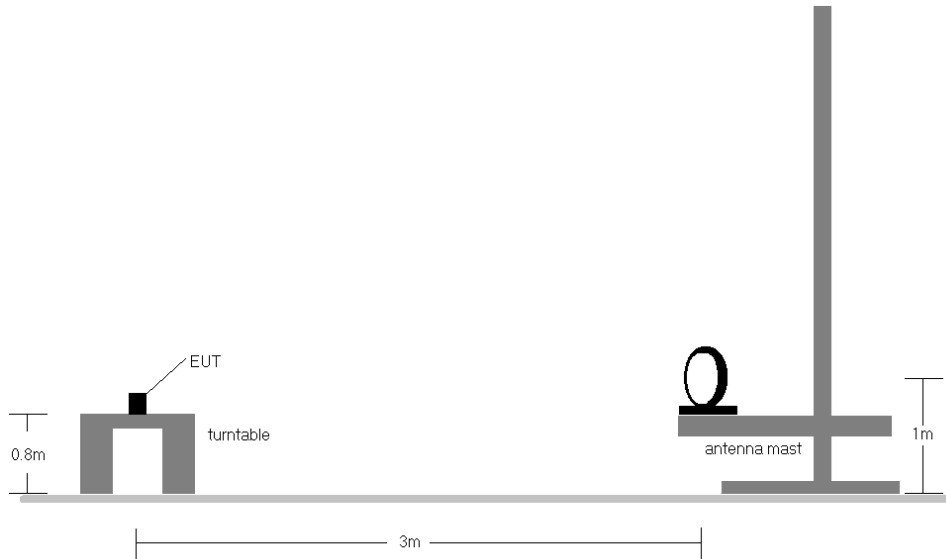

**Figure 7-10. Radiated Test Setup < 30Mhz**

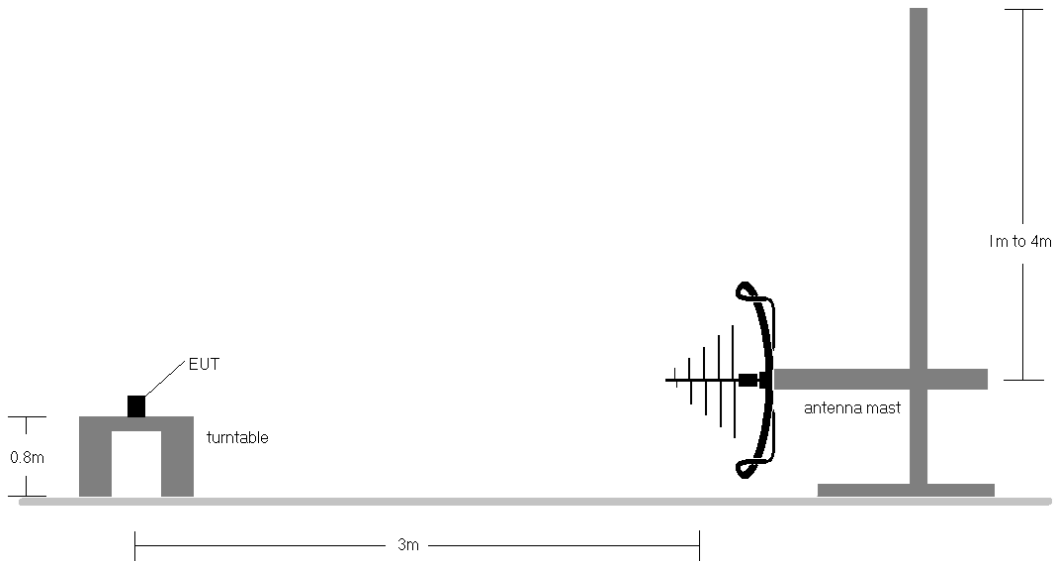

**Figure 7-11. Radiated Test Setup < 1GHz**


FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 131 of 138

**Test Notes**

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limits shown in §15.209.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 132 of 138

**Radiated Spurious Emissions Measurements (Below 1GHz)**  
§15.209; RSS-Gen [8.9]

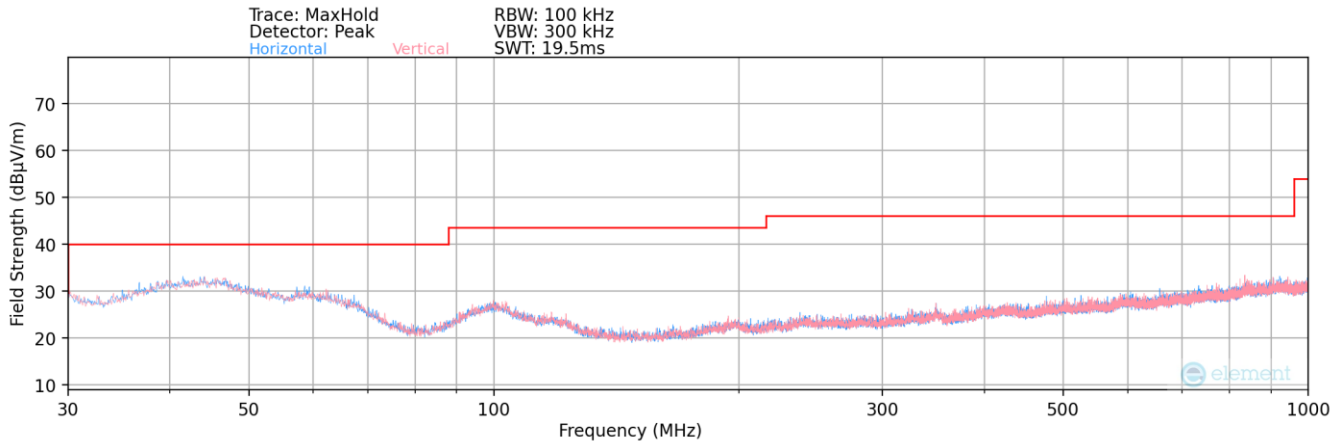

**Plot 7-185. Radiated Spurious Plot below 1GHz**

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 133 of 138

## 7.12 Line Conducted Measurement Data

§15.207; RSS-Gen [8.8]

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

**All conducted emissions must not exceed the limits shown in the table below per Section 15.207 and RSS-Gen (8.8).**

Frequency of emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-27. Conducted Limits

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Section 6.2

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 134 of 138

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


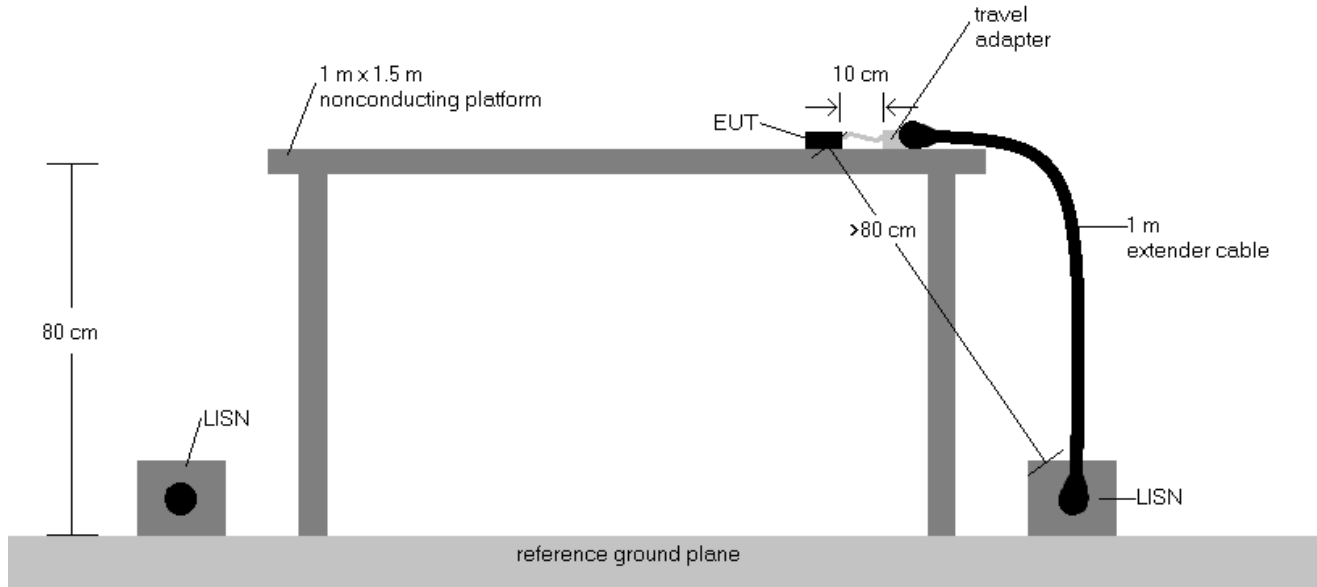


Figure 7-12. Test Instrument & Measurement Setup


### Test Notes

1. All modes of operation were investigated, and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3.  $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4.  $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5.  $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMS928B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 135 of 138

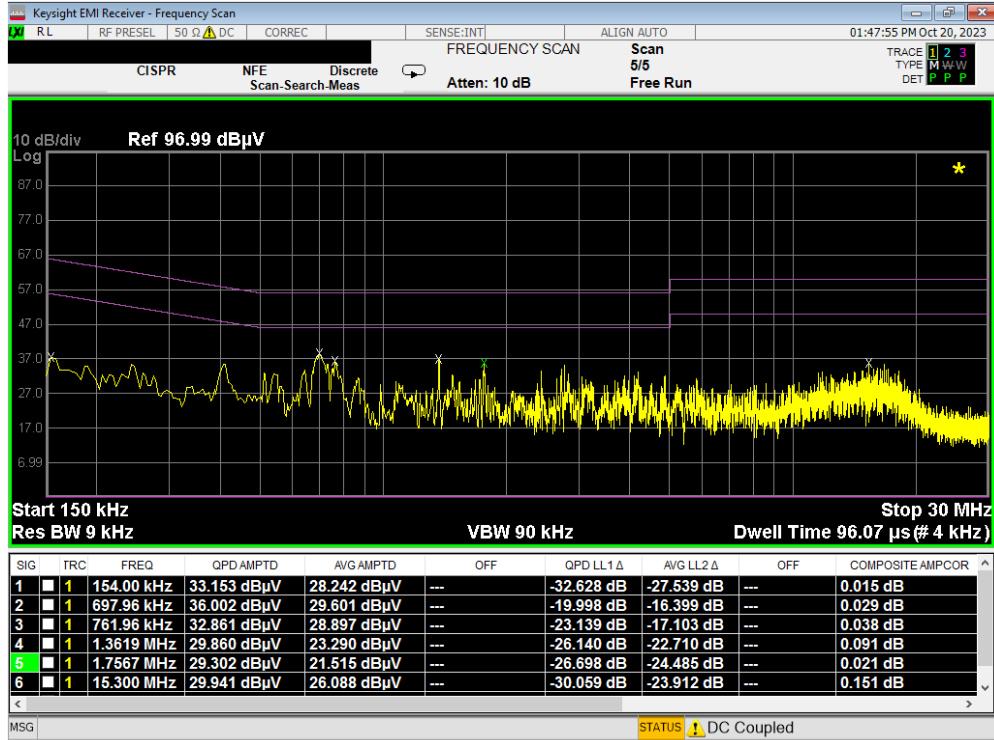


Plot 7-186. Line-Conducted Test Plot (L1)

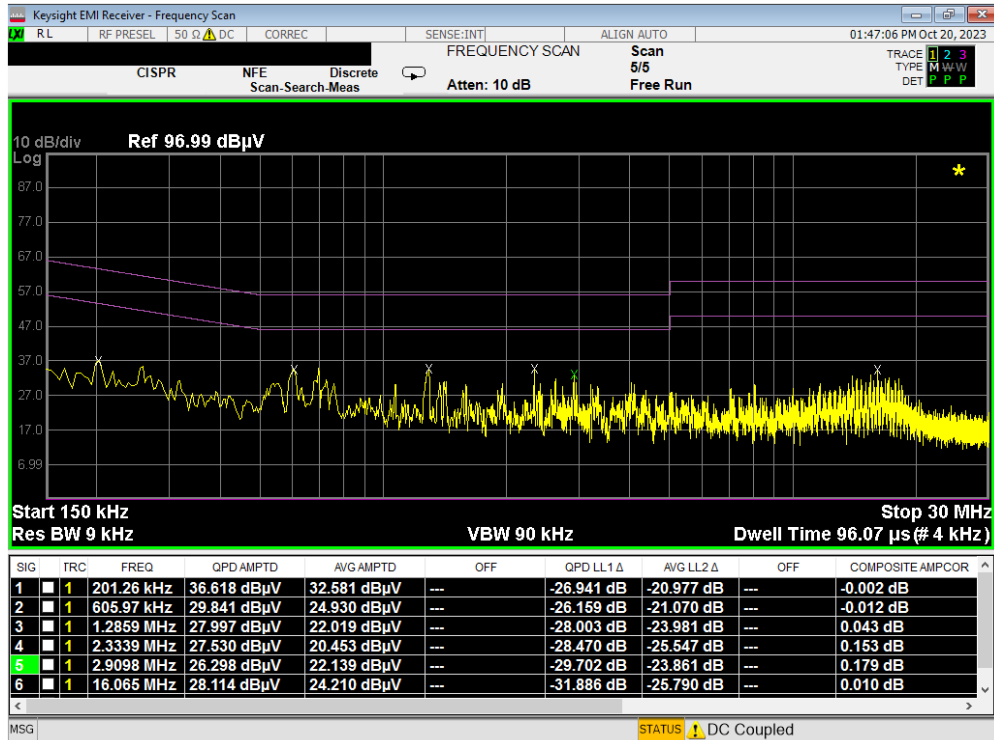


Plot 7-187. Line-Conducted Test Plot (N)

MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
FCC ID: A3LSMS928B	Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset
			Page 136 of 138



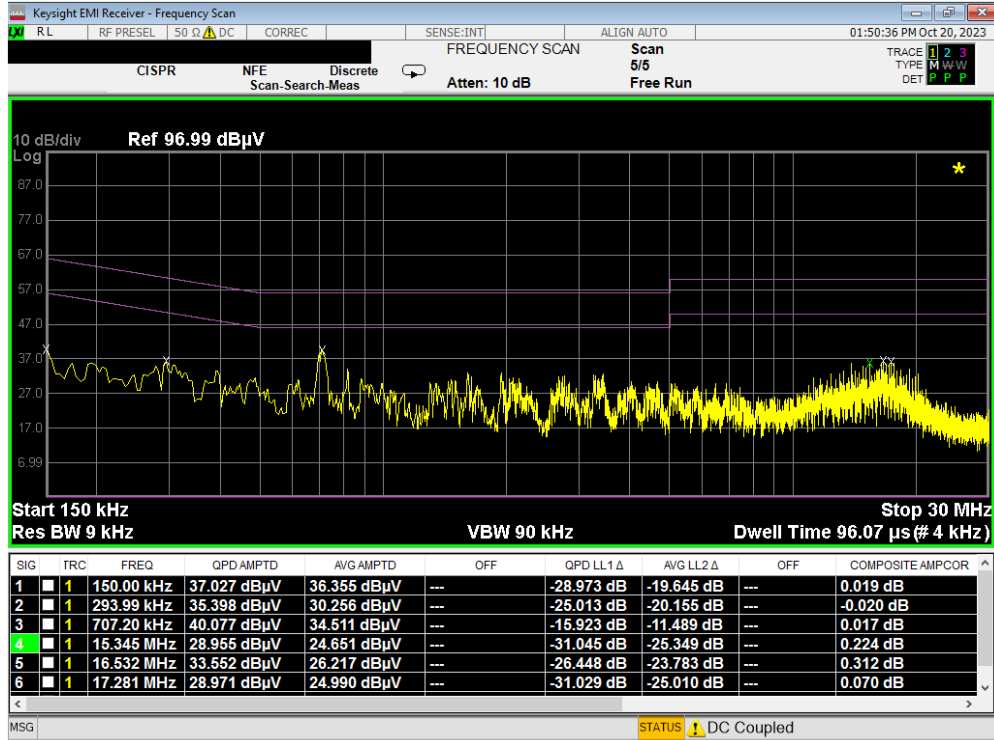

Plot 7-188. Line-Conducted Test Plot (L1) – WPT

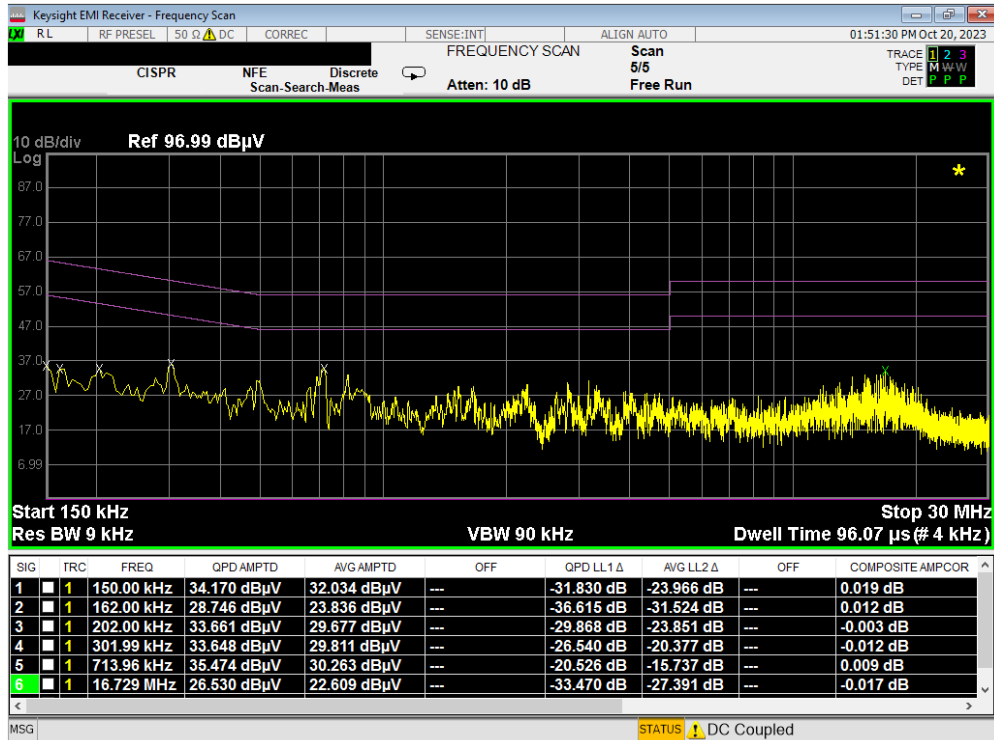

Plot 7-189. Line-Conducted Test Plot (N) – WPT

MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
FCC ID: A3LSMS928B	Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset
			Page 137 of 138

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS928B** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules.

FCC ID: A3LSMS928B	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
Test Report S/N: 1M2308210093-07.A3L	Test Dates: 8/22 - 11/06/2023	EUT Type: Portable Handset	Page 138 of 138