

Test Notes

1. All spurious emissions lying in restricted bands specified in §15.205 are below the limits specified in §15.209. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
2. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [68.2dB μ V/m]. If a peak measurement passes the average limit, it was determined no further investigation is necessary.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported, however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. In the case where a peak-detector measurement passed the given RMS limit it was determined sufficient to demonstrate compliance.
9. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]


Radiated Band Edge Measurement Offset

The amplitude offset shown in the radiated restricted band edge plots was calculated using the formula:


Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 140 of 158


7.7.1 MIMO Radiated Spurious Emission Measurements

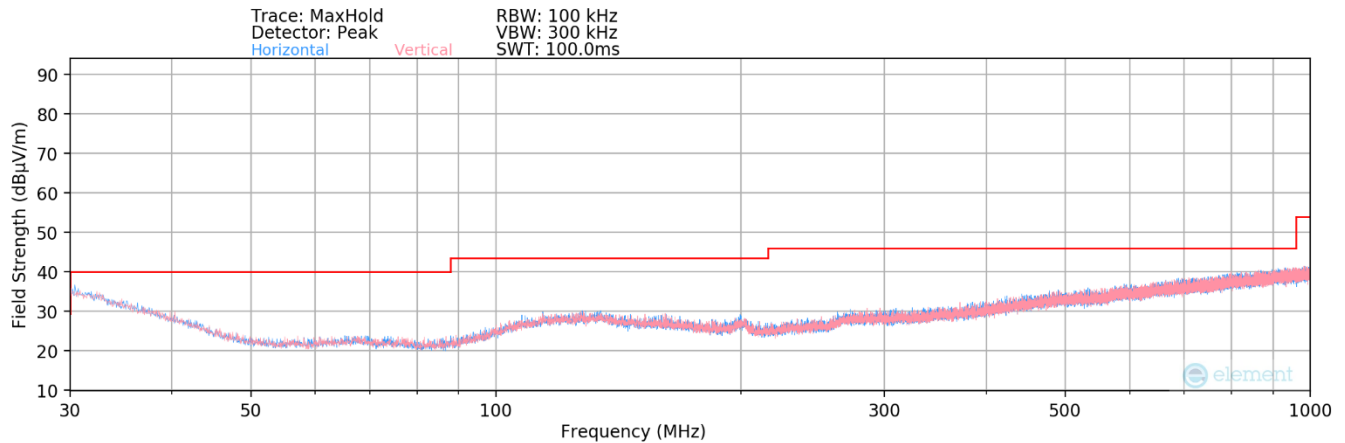

Plot 7-189. Radiated Spurious Plot below 1GHz MIMO (802.11ax) – LPI & SP

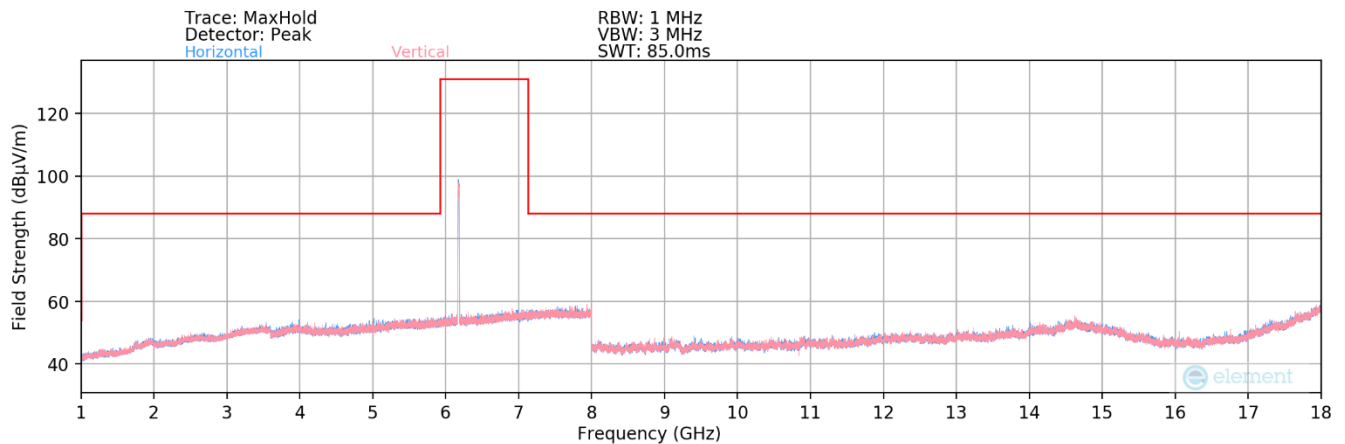


Plot 7-190. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 5 Ch. 45) – LPI & SP

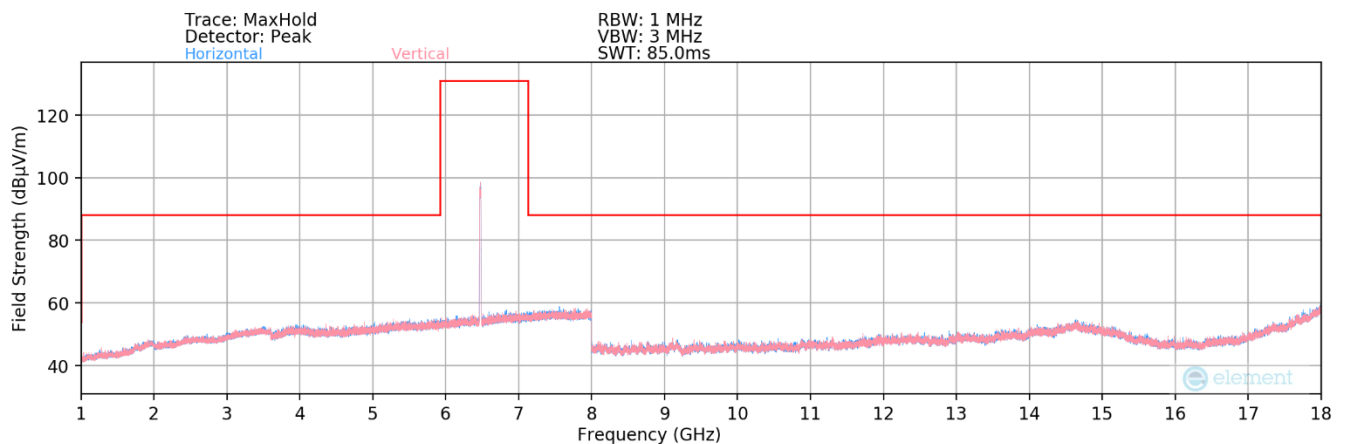


Plot 7-191. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 6 Ch. 105) - LPI


FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 141 of 158

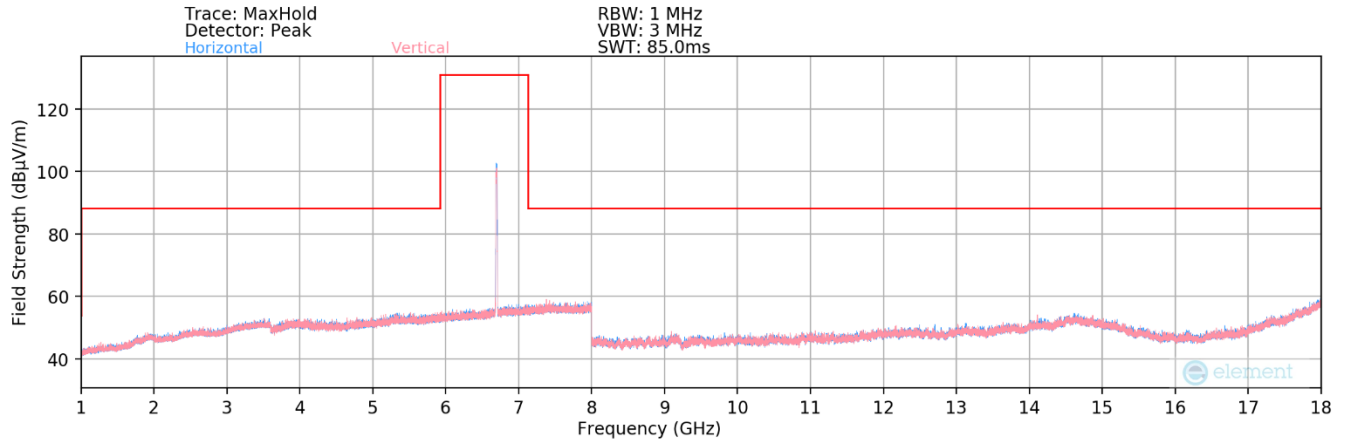

Plot 7-192. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 7 Ch. 149) – LPI & SP

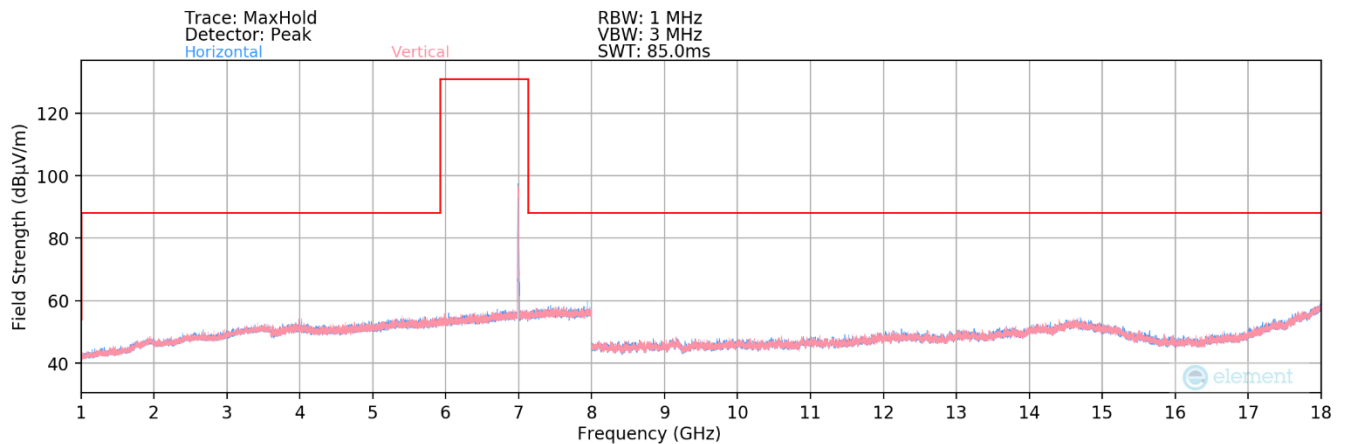


Plot 7-193. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11ax – UNII Band 8 Ch. 209) - LPI

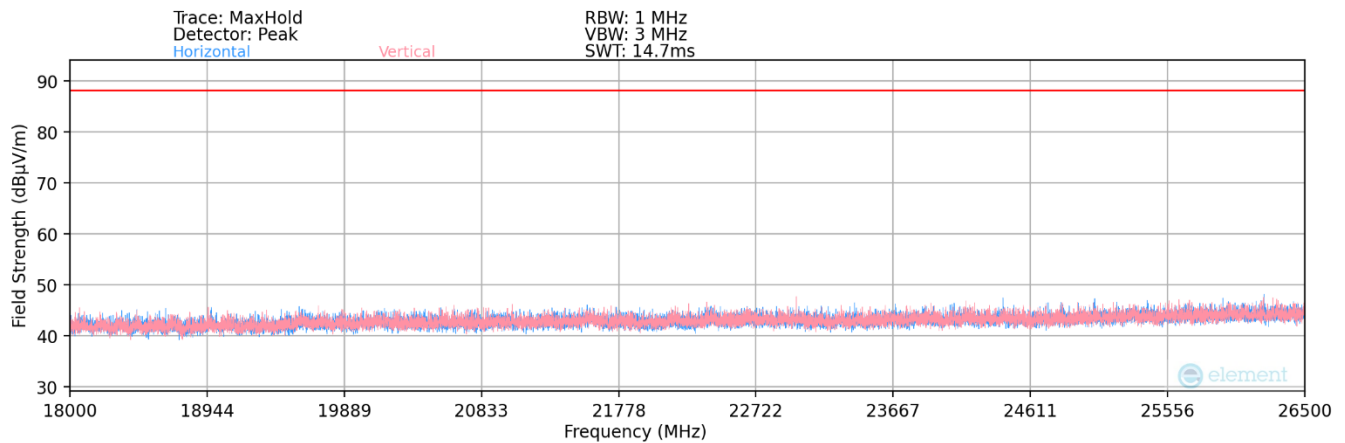

Plot 7-194. Radiated Spurious Plot 18GHz - 26.5GHz (802.11ax) – LPI & SP

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 142 of 158

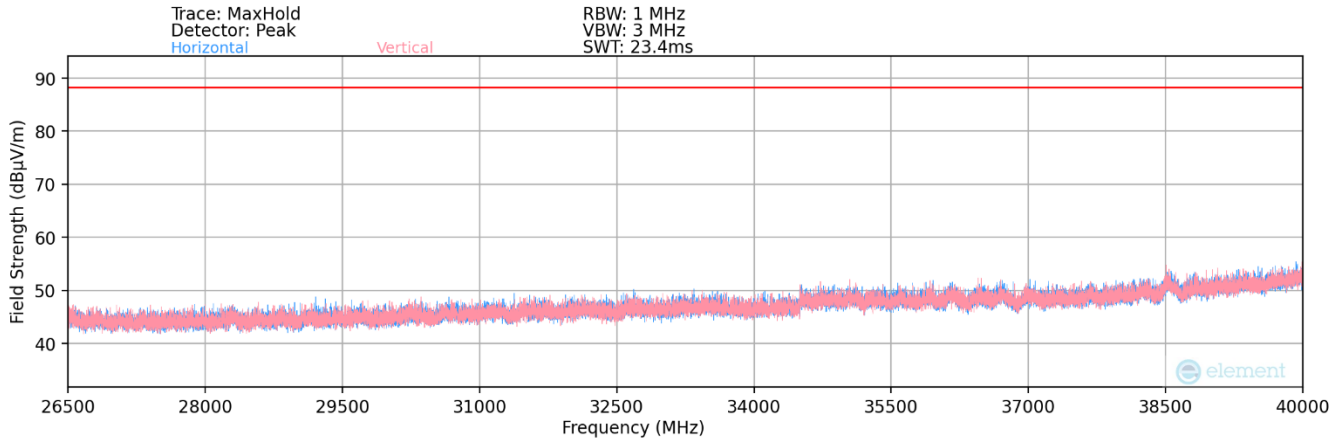

Plot 7-195. Radiated Spurious Plot 26.5GHz - 40GHz (802.11ax) – LPI & SP

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 143 of 158

MIMO Radiated Spurious Emission Measurements

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]			
802.11a	MIMO	5	2	5935	*	11870.00	Average	V	-	-	-78.43	9.35	0.00	37.92	53.98	-16.06			
					*	11870.00	Peak	V	-	-	-66.60	9.35	0.00	49.75	73.98	-24.23			
					*	17805.00	Average	V	-	-	-77.50	16.41	0.00	45.91	53.98	-8.07			
					*	17805.00	Peak	V	-	-	-65.24	16.41	0.00	58.17	73.98	-15.81			
					*	23740.00	Average	V	-	-	-65.47	4.14	-9.54	36.13	53.98	-17.85			
					*	23740.00	Peak	V	-	-	-54.52	4.14	-9.54	47.08	73.98	-26.90			
									29675.00	Peak	V	-	-	-56.26	5.96	-9.54	47.16	68.20	-21.04
									12350.00	Average	V	-	-	-78.48	9.60	0.00	38.12	53.98	-15.86
									12350.00	Peak	V	-	-	-66.34	9.60	0.00	50.26	73.98	-23.72
									18525.00	Average	V	-	-	-64.62	1.55	-9.54	34.39	53.98	-19.59
									18525.00	Peak	V	-	-	-54.27	1.55	-9.54	44.73	73.98	-29.25
									24700.00	Peak	V	-	-	-55.80	4.20	-9.54	45.86	68.20	-22.34
									30875.00	Peak	V	-	-	-56.43	6.77	-9.54	47.80	68.20	-20.40
									12830.00	Peak	V	-	-	-67.10	9.64	0.00	49.54	68.20	-18.66
								*	19245.00	Average	V	-	-	-65.12	2.35	-9.54	34.69	53.98	-19.29
								*	19245.00	Peak	V	-	-	-55.56	2.35	-9.54	44.25	73.98	-29.73
									25660.00	Peak	V	-	-	-55.19	4.41	-9.54	46.68	68.20	-21.52
									32075.00	Peak	V	-	-	-56.18	7.43	-9.54	48.72	68.20	-19.48

Table 7-20. Radiated Measurements MIMO – UNII 5 – LPI & SP

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]			
802.11a	MIMO	6	97	6435		12870.00	Peak	V	-	-	-67.77	10.05	0.00	49.28	68.20	-18.92			
					*	19305.00	Average	V	-	-	-64.95	2.13	-9.54	34.64	53.98	-19.34			
					*	19305.00	Peak	V	-	-	-55.70	2.13	-9.54	43.89	73.98	-30.09			
						25740.00	Peak	V	-	-	-56.05	4.51	-9.54	45.92	68.20	-22.28			
						32175.00	Peak	V	-	-	-56.52	7.53	-9.54	48.47	68.20	-19.73			
									12950.00	Peak	V	-	-	-66.52	10.12	0.00	50.60	68.20	-17.60
								*	19425.00	Average	V	-	-	-65.25	2.22	-9.54	34.43	53.98	-19.55
								*	19425.00	Peak	V	-	-	-55.91	2.22	-9.54	43.77	73.98	-30.21
									25900.00	Peak	V	-	-	-56.85	4.57	-9.54	45.18	68.20	-23.02
									32375.00	Peak	V	-	-	-57.25	7.29	-9.54	47.50	68.20	-20.70
									13030.00	Peak	V	-	-	-66.59	10.12	0.00	50.53	68.20	-17.67
								*	19545.00	Average	V	-	-	-65.65	2.37	-9.54	34.18	53.98	-19.80
								*	19545.00	Peak	V	-	-	-55.19	2.37	-9.54	44.64	73.98	-29.34
									26060.00	Peak	V	-	-	-55.96	4.80	-9.54	46.30	68.20	-21.90
									32575.00	Peak	V	-	-	-55.57	6.85	-9.54	48.75	68.20	-19.45

Table 7-21. Radiated Measurements MIMO – UNII 6 - LPI

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 144 of 158

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
802.11a	MIMO	7	117	6535		13070.00	Peak	V	-	-	-65.85	10.15	0.00	51.30	68.20	-16.90
					*	19605.00	Average	V	-	-	-65.19	2.64	-9.54	34.92	53.98	-19.06
					*	19605.00	Peak	V	-	-	-55.23	2.64	-9.54	44.87	73.98	-29.11
						26140.00	Peak	V	-	-	-56.36	4.56	-9.54	45.66	68.20	-22.54
						32675.00	Peak	V	-	-	-56.21	7.03	-9.54	48.28	68.20	-19.92
						13390.00	Average	V	-	-	-78.69	10.35	0.00	38.66	53.98	-15.32
			149	6695	*	13390.00	Peak	V	-	-	-66.86	10.35	0.00	50.49	73.98	-23.49
					*	20085.00	Peak	V	-	-	-64.28	3.01	-9.54	36.19	53.98	-17.79
					*	20085.00	Average	V	-	-	-54.04	3.01	-9.54	46.43	73.98	-27.55
					*	26780.00	Peak	V	-	-	-56.22	4.57	-9.54	45.82	68.20	-22.38
						33475.00	Peak	V	-	-	-56.76	7.57	-9.54	48.27	68.20	-19.93
						13750.00	Peak	V	-	-	-66.32	11.07	0.00	51.75	68.20	-16.45
			185	6875	*	20625.00	Average	V	-	-	-64.64	3.42	-9.54	36.24	53.98	-17.74
					*	20625.00	Peak	V	-	-	-55.44	3.42	-9.54	45.44	73.98	-28.54
						27500.00	Peak	V	-	-	-55.91	4.54	-9.54	46.09	68.20	-22.11
						34375.00	Peak	V	-	-	-57.07	8.08	-9.54	48.47	68.20	-19.73

Table 7-22. Radiated Measurements MIMO – UNII 7 – LPI & SP


Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
802.11a	MIMO	8	189	6895		13790.00	Peak	V	-	-	-65.75	11.00	0.00	52.25	68.20	-15.95
					*	20685.00	Average	V	-	-	-65.38	3.67	-9.54	35.75	53.98	-18.23
					*	20685.00	Peak	V	-	-	-54.60	3.67	-9.54	46.53	73.98	-27.45
						27580.00	Peak	V	-	-	-55.55	4.68	-9.54	46.60	68.20	-21.60
						34475.00	Peak	V	-	-	-56.04	7.83	-9.54	49.25	68.20	-18.95
			209	6995		13990.00	Peak	V	-	-	-65.88	11.26	0.00	52.38	68.20	-15.82
					*	20985.00	Average	V	-	-	-65.85	3.59	-9.54	35.20	53.98	-18.78
					*	20985.00	Peak	V	-	-	-57.06	3.59	-9.54	43.99	73.98	-29.99
						27980.00	Peak	V	-	-	-57.27	5.05	-9.54	45.25	68.20	-22.95
			233	7115		34975.00	Peak	V	-	-	-58.25	8.24	-9.54	47.45	68.20	-20.75
						14230.00	Peak	V	-	-	-66.70	12.13	0.00	52.43	68.20	-15.77
					*	21345.00	Average	V	-	-	-66.35	4.08	-9.54	35.18	53.98	-18.80
					*	21345.00	Peak	V	-	-	-56.56	4.08	-9.54	44.97	73.98	-29.01
						28460.00	Peak	V	-	-	-57.42	5.14	-9.54	45.17	68.20	-23.03
				35575.00	Peak	V	-	-	-57.76	8.16	-9.54	47.87	68.20	-20.33		

Table 7-23. Radiated Measurements MIMO – UNII 8 - LPI


FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 145 of 158

7.7.2 MIMO Radiated Band Edge Measurements (20MHz BW)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5935MHz
Channel:	2

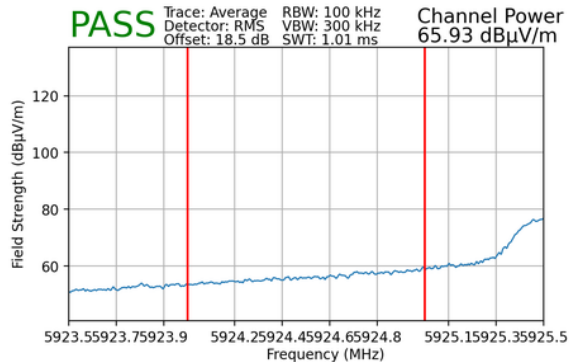


Plot 7-196. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5) – LPI & SP

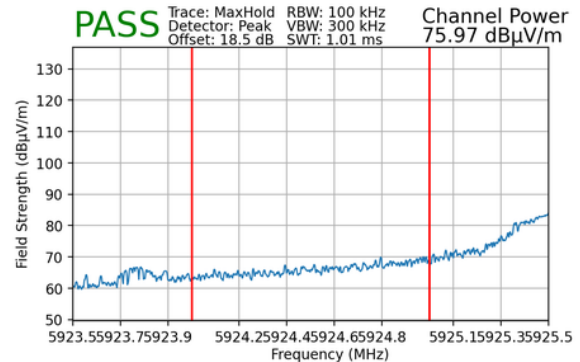


Plot 7-197. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5) – LPI & SP

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	7115MHz
Channel:	233

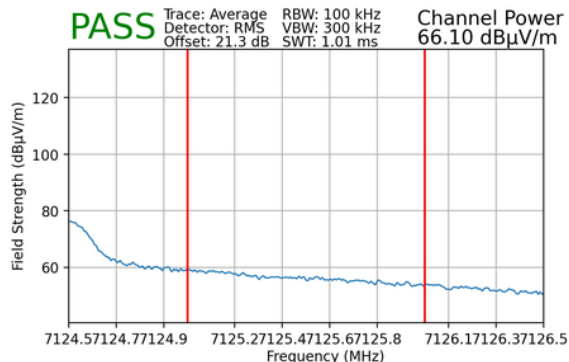

Plot 7-198. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8) - LPI

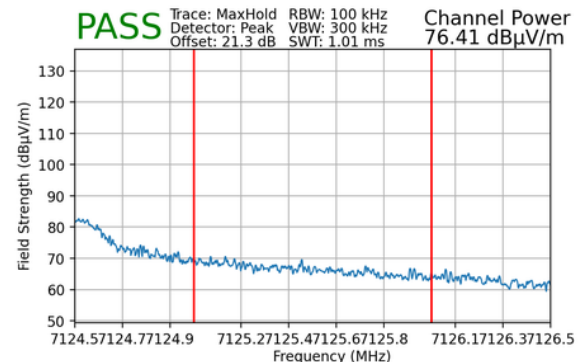


Plot 7-199. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8) - LPI


FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 146 of 158

7.7.3 MIMO Radiated Band Edge Measurements (40MHz BW)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

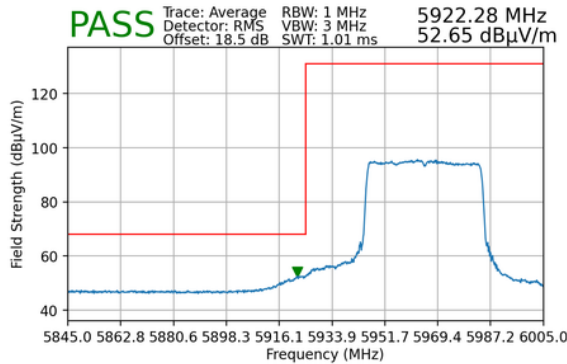


Plot 7-200. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5) – LPI & SP

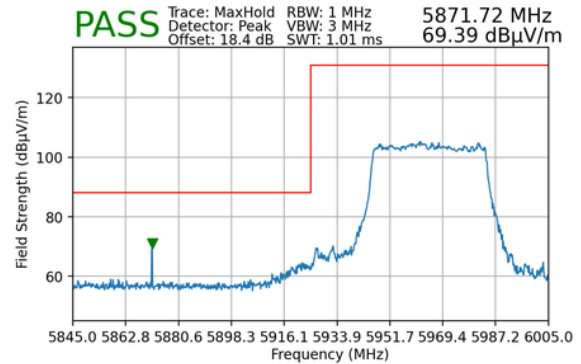


Plot 7-201. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5) – LPI & SP

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	7085MHz
Channel:	227

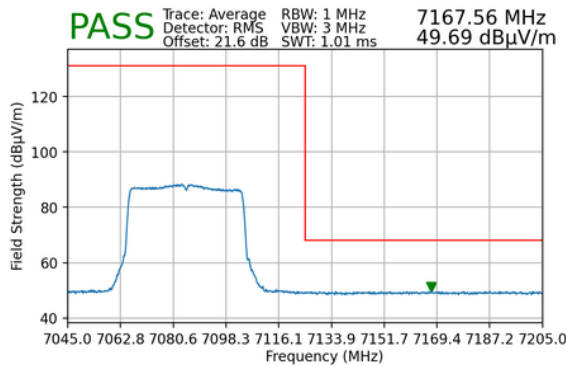

Plot 7-202. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8) - LPI

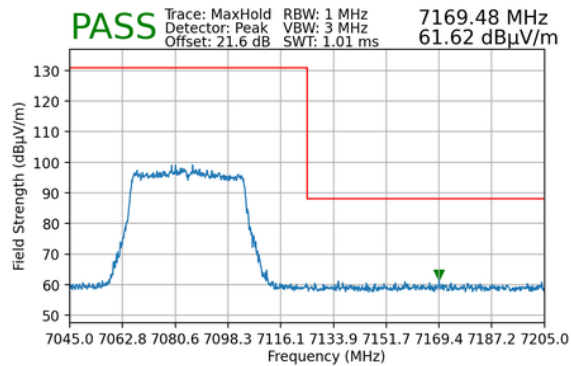


Plot 7-203. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8) - LPI


FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 147 of 158

7.7.4 MIMO Radiated Band Edge Measurements (80MHz BW)

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	5985MHz
Channel:	7

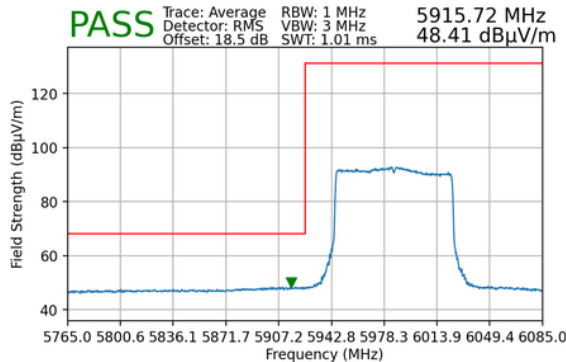


Plot 7-204. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5) – LPI & SP

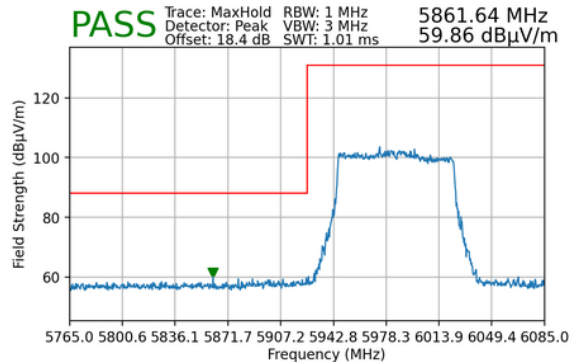


Plot 7-205. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5) – LPI & SP

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	7025MHz
Channel:	215

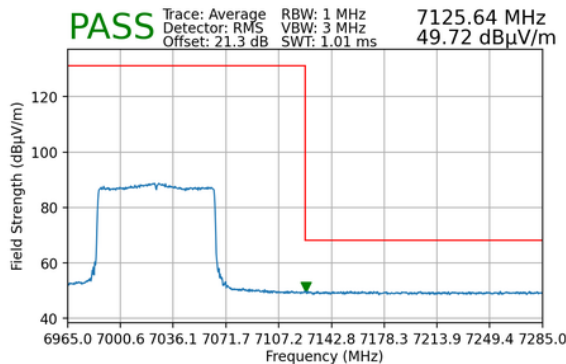

Plot 7-206. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8) - LPI

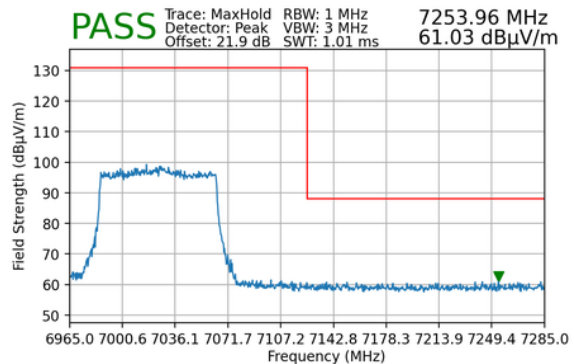


Plot 7-207. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8) - LPI


FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 148 of 158

7.7.5 MIMO Radiated Band Edge Measurements (160MHz BW)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6025MHz
Channel:	15

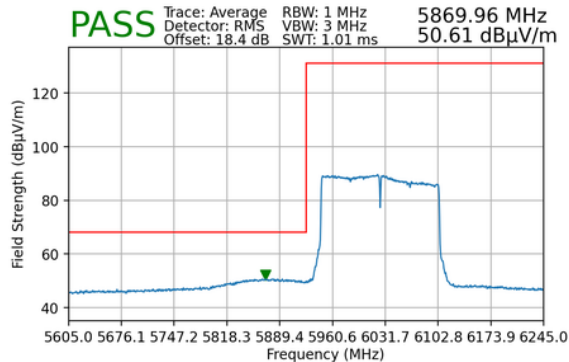


Plot 7-208. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5) – LPI & SP

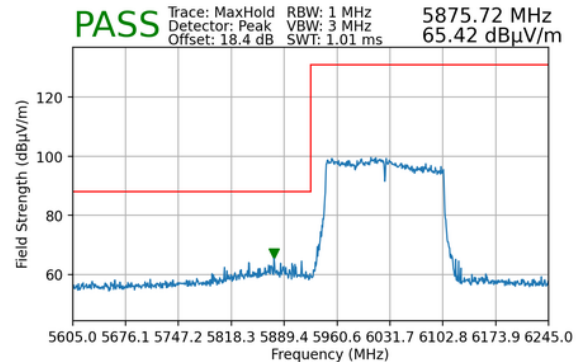


Plot 7-209. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5) – LPI & SP

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	207

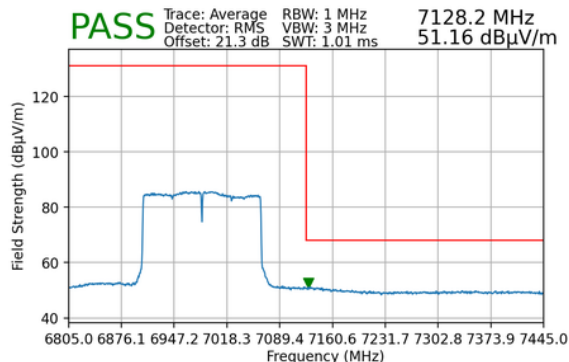

Plot 7-210. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8) - LPI

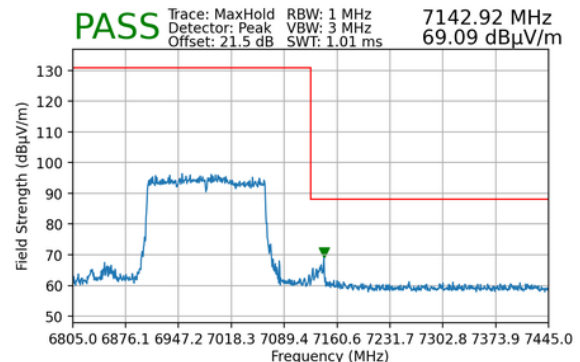


Plot 7-211. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8) - LPI


FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 149 of 158

7.7.6 MIMO Radiated Band Edge Measurements (320MHz BW)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6105MHz
Channel:	31

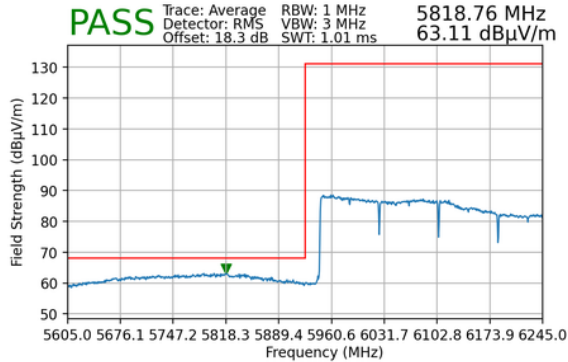


Plot 7-212. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5) – LPI & SP

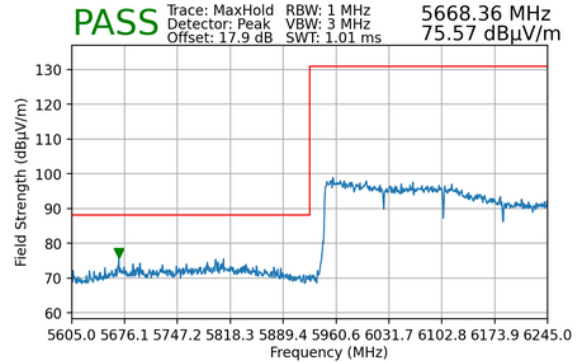


Plot 7-213. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5) – LPI & SP

Worst Case Mode:	802.11be
Worst Case Transfer Rate:	MCS0
Distance of Measurements:	3 Meters
Operating Frequency:	6985MHz
Channel:	191

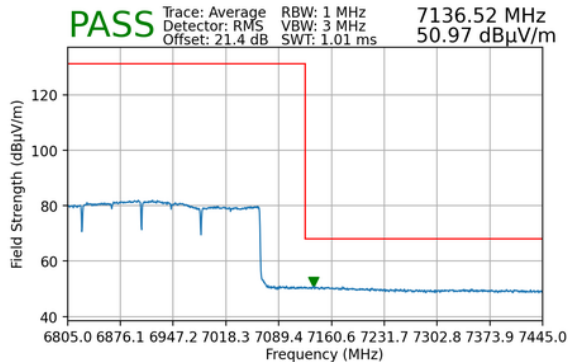

Plot 7-214. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8) - LPI

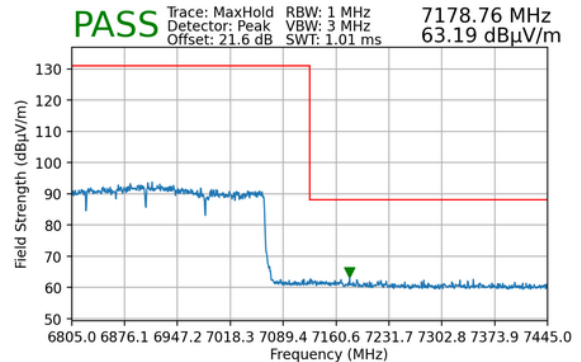

Plot 7-215. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8) - LPI

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 150 of 158

7.8 Line Conducted Test Data

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst-case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207.

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-24. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest.
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest.
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 151 of 158

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


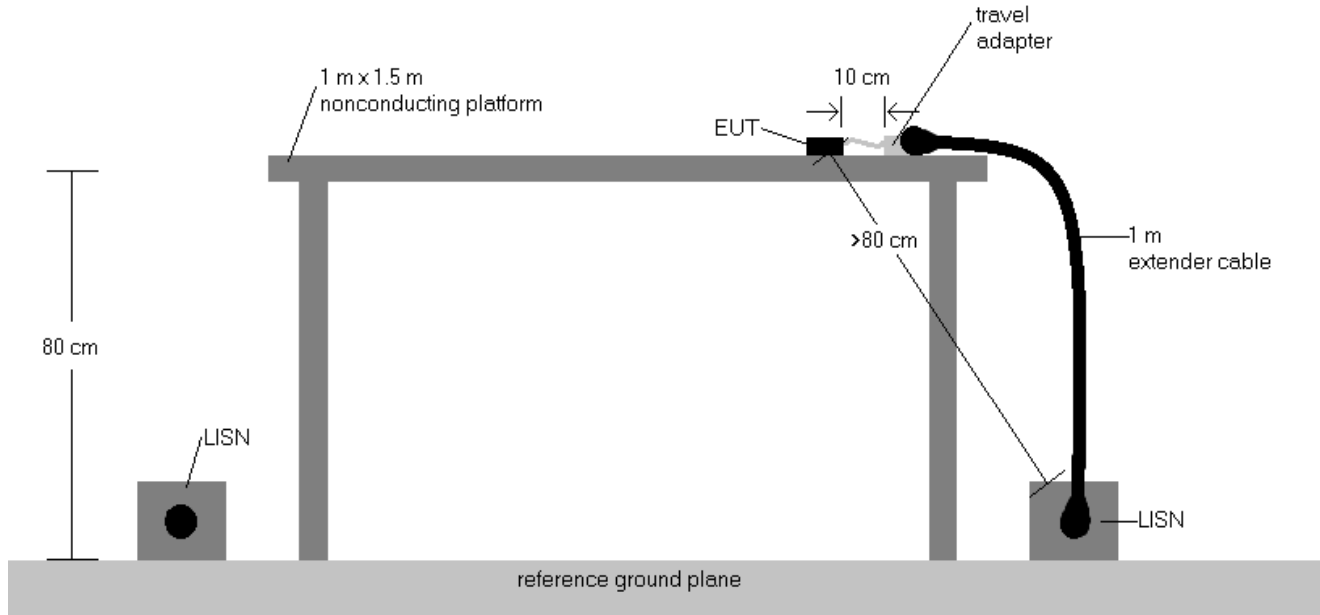


Figure 7-9. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated, and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz is specified in 15.207.
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 152 of 158

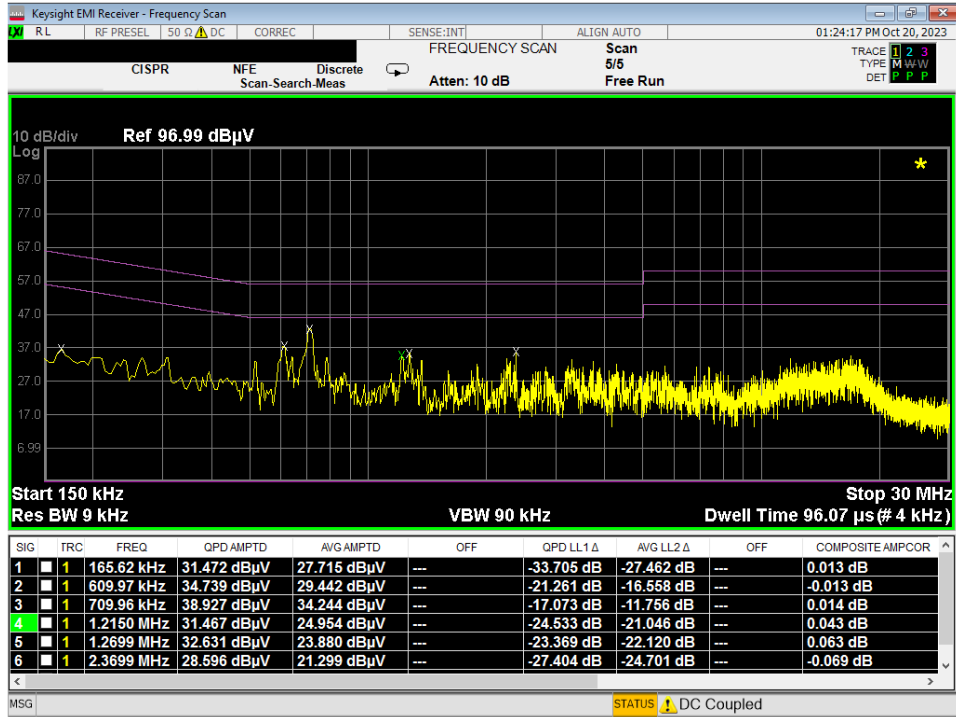


Plot 7-216. Line Conducted Plot with 802.11a UNII Band 5 (L1)

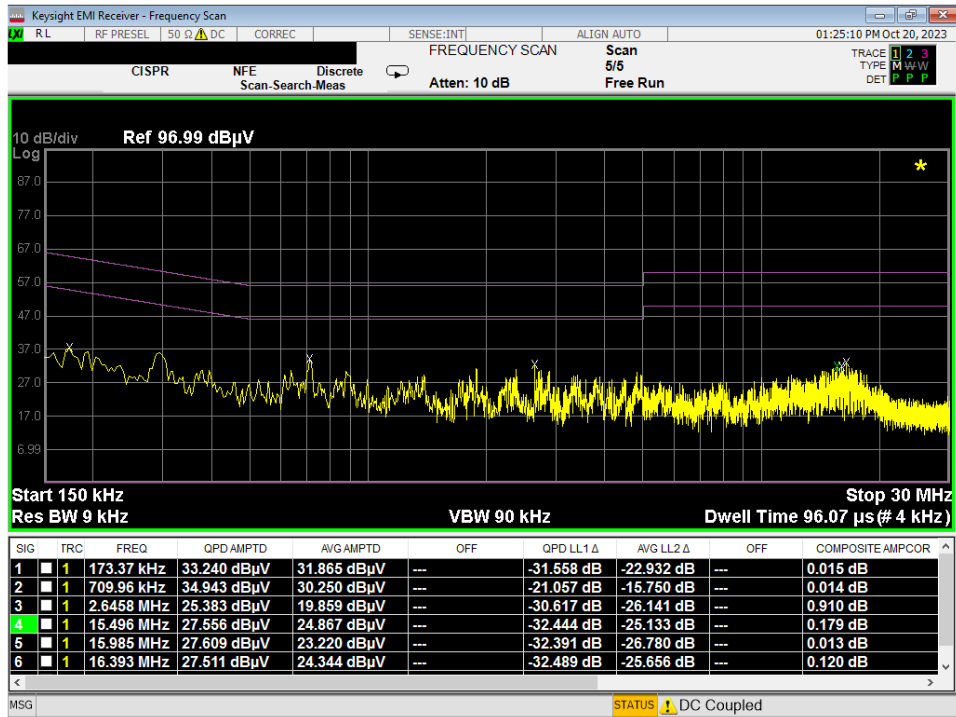


Plot 7-217. Line Conducted Plot with 802.11a UNII Band 5 (N)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 153 of 158

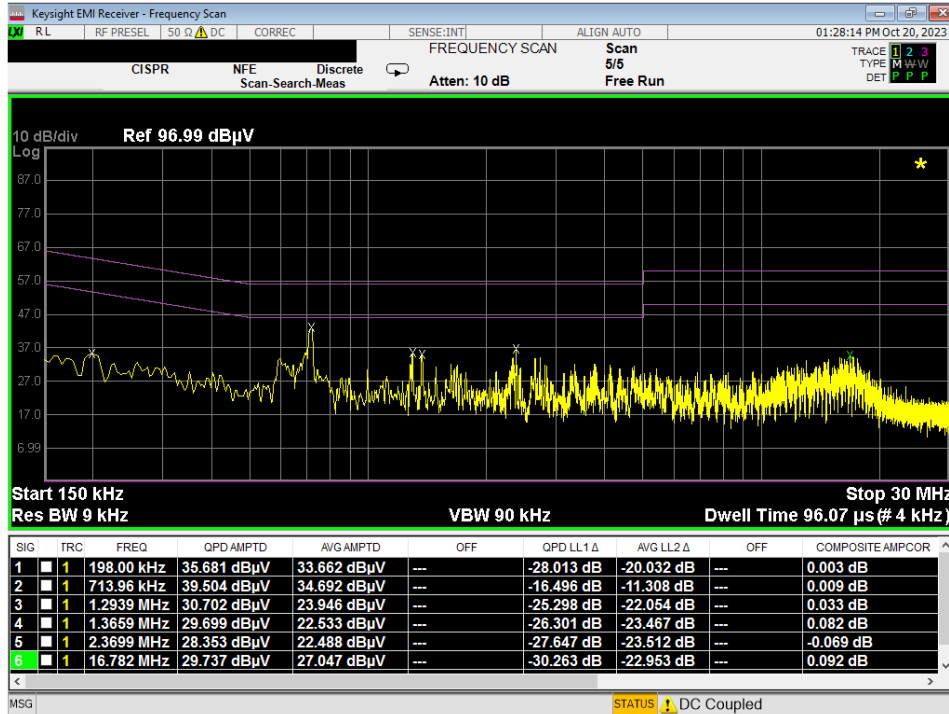


Plot 7-218. Line Conducted Plot with 802.11a UNII Band 6 (L1)

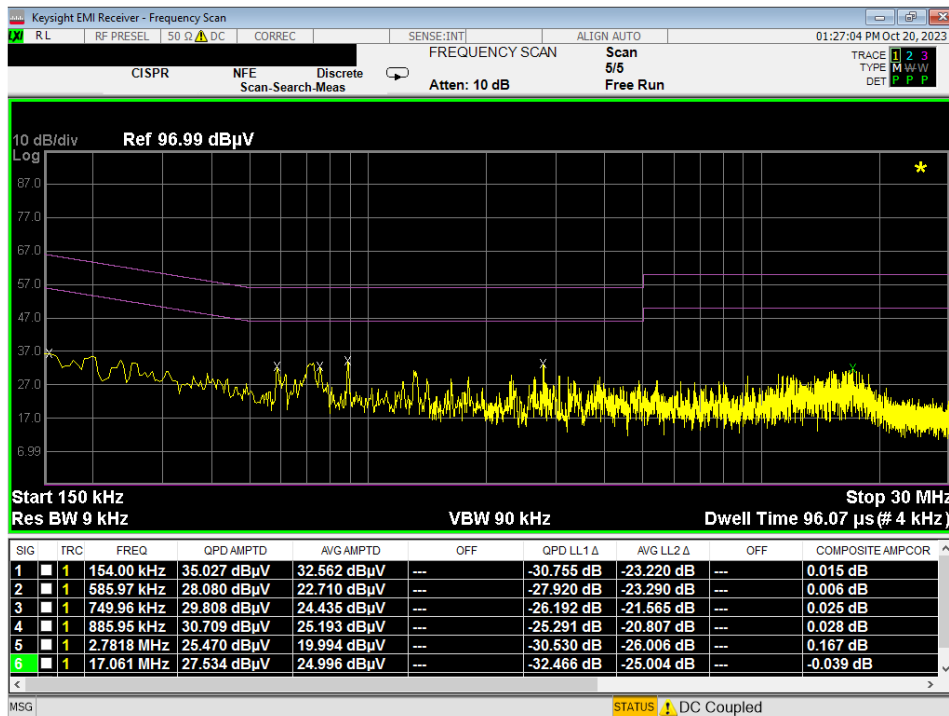


Plot 7-219. Line Conducted Plot with 802.11a UNII Band 6 (N)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 154 of 158

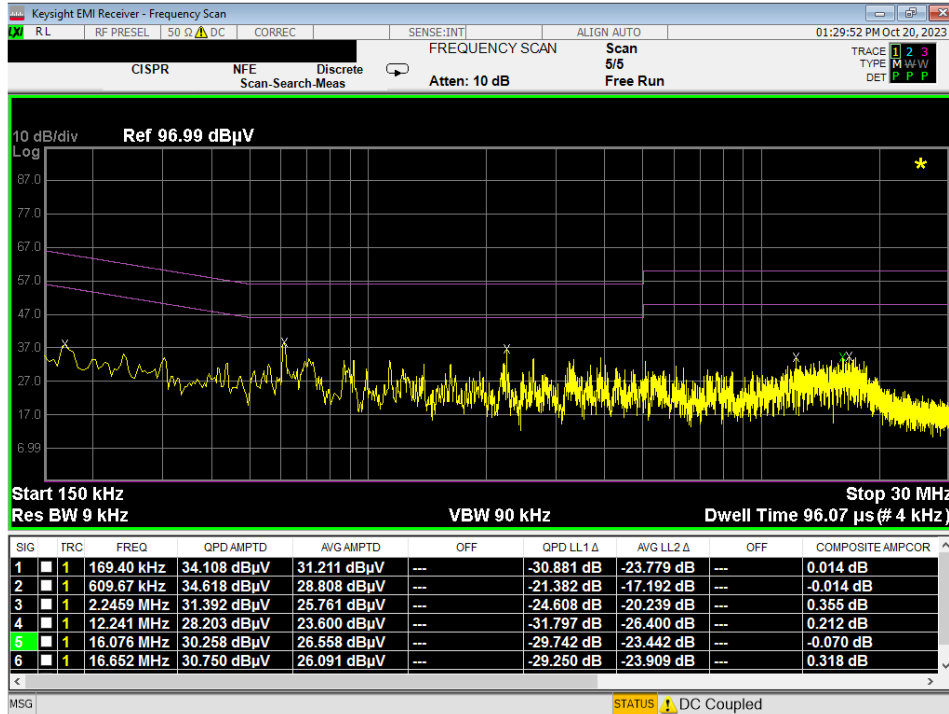


Plot 7-220. Line Conducted Plot with 802.11a UNII Band 7 (L1)

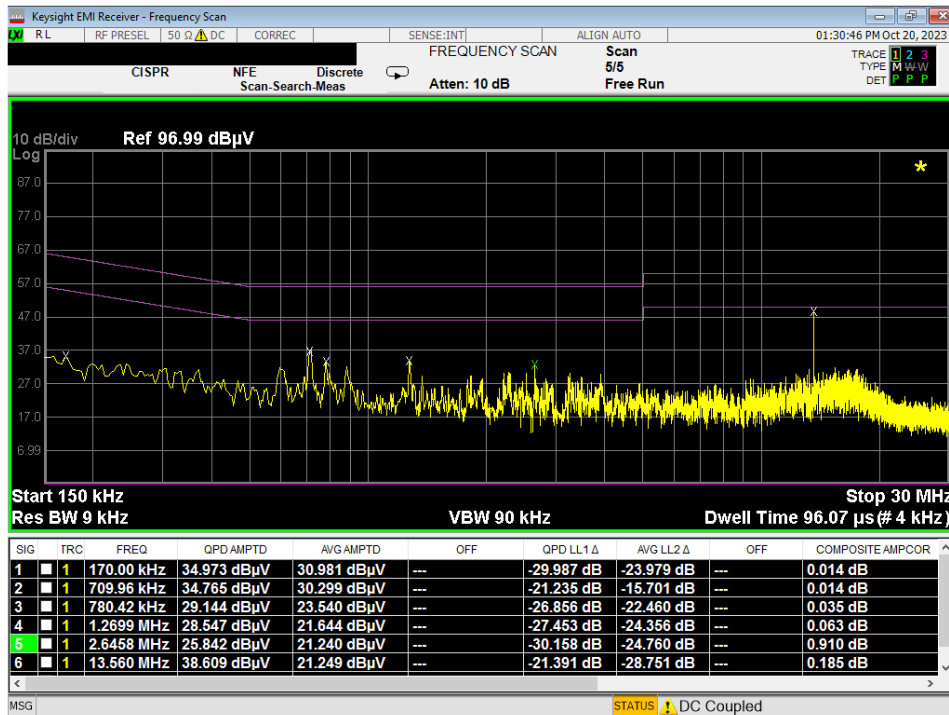


Plot 7-221. Line Conducted Plot with 802.11a UNII Band 7 (N)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 155 of 158

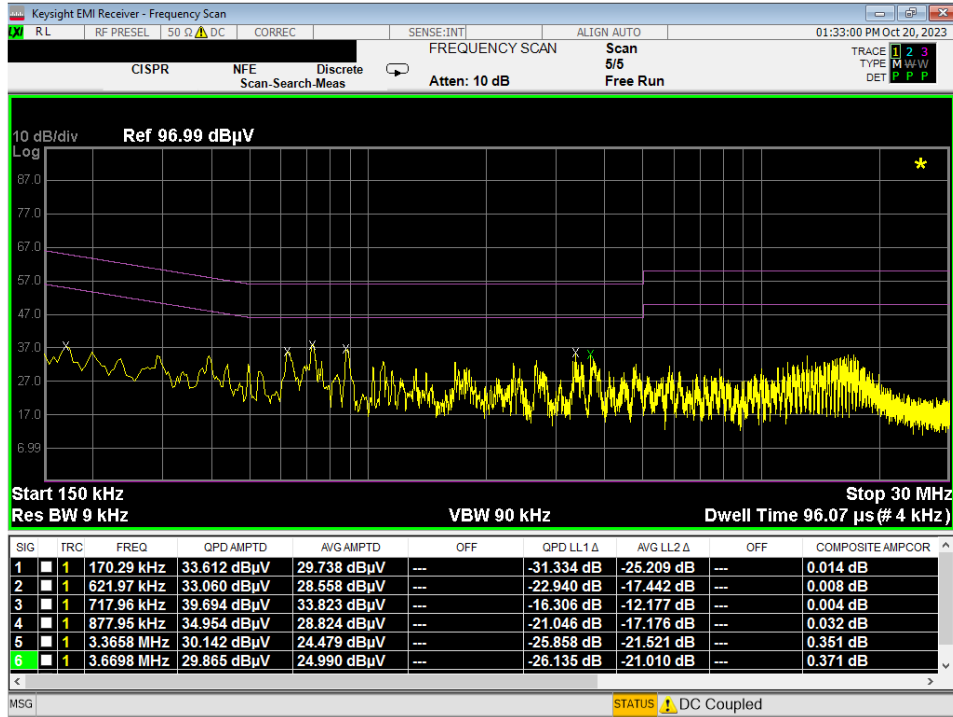


Plot 7-222. Line Conducted Plot with 802.11a UNII Band 8 (L1)

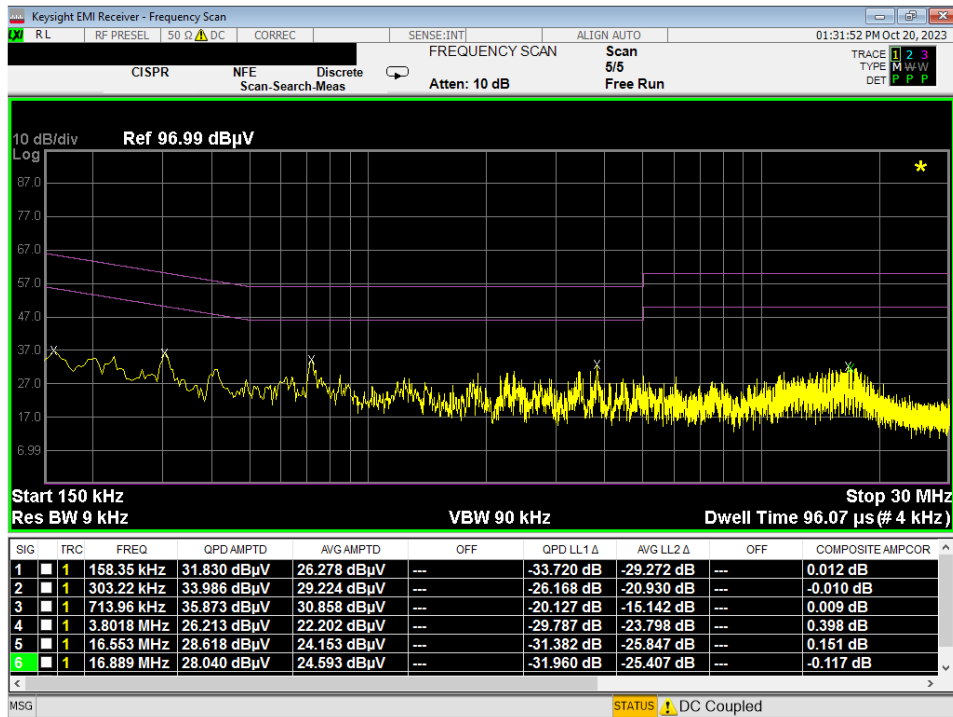


Plot 7-223. Line Conducted Plot with 802.11a UNII Band 8 (N)

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 156 of 158

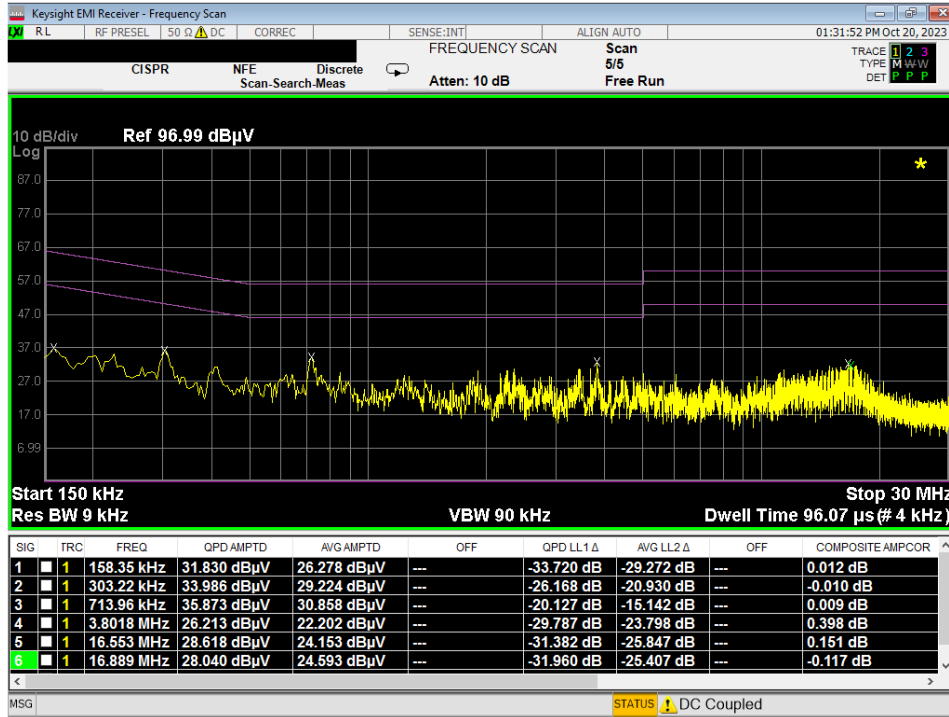

Plot 7-224. Line Conducted Plot with 802.11a UNII Band 5 (L1) with WCP

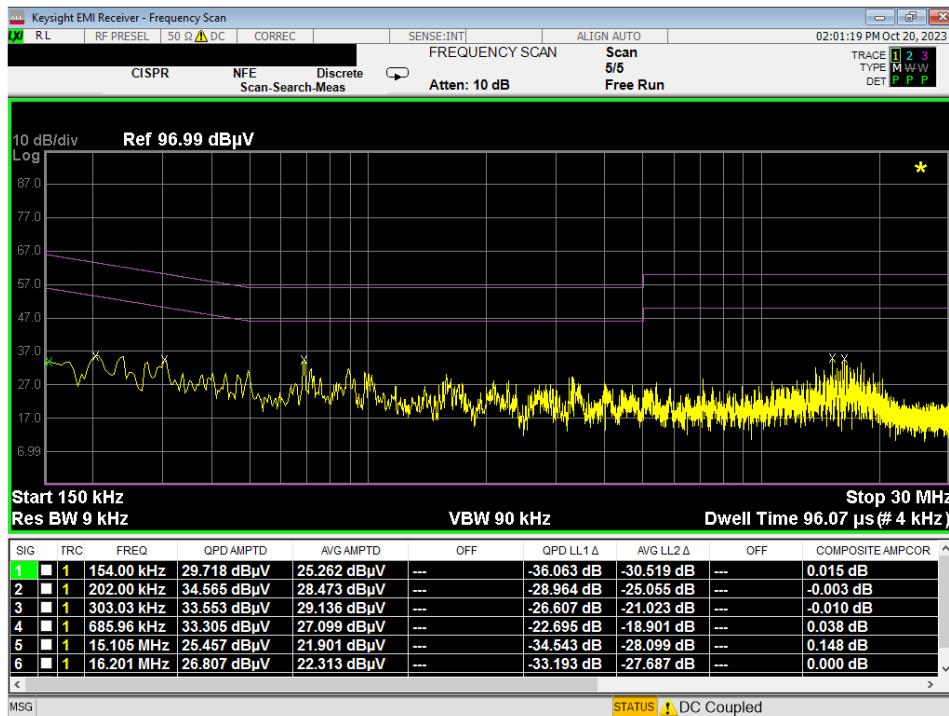

Plot 7-225. Line Conducted Plot with 802.11a UNII Band 5 (N) with WCP

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 157 of 158

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS928B** is in compliance with FCC Part Subpart E (15.407) of the FCC rules for operation as a client device.

FCC ID: A3LSMS928B	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2308210093-15-R1.A3L	Test Dates: 8/22 – 11/09/2023	EUT Type: Portable Handset	Page 158 of 158