

**MEASUREMENT REPORT  
FCC PART 15.247 802.11ax/be (OFDMA)****Applicant Name:**

Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**

9/6/2023 - 11/06/2023

**Test Report Issue Date:**

11/06/2023

**Test Site/Location:**

Element lab., Columbia, MD, USA

**Test Report Serial No.:**

1M2312110124-07.A3L

**FCC ID:**

**A3LSMS928JPN**

**APPLICANT:**

**Samsung Electronics Co., Ltd.**

**Application Type:**

Certification

**Model:**

SC-52E

**Additional Model(s):**

SCG26

**EUT Type:**

Portable Handset

**Frequency Range:**

2412 – 2472MHz

**Modulation Type:**

OFDMA

**FCC Classification:**

Digital Transmission System (DTS)

**FCC Rule Part(s):**

Part 15 Subpart C (15.247)

**Test Procedure(s):**

ANSI C63.10-2013, KDB 648474 D03 v01r04,  
KDB 484596 D01 v02r02

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



**RJ Ortanez**  
**Executive Vice President**



<b>FCC ID:</b> A3LSMS928JPN	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2312110124-07.A3L	<b>Test Dates:</b> 9/6/2023 - 11/06/2023	<b>EUT Type:</b> Portable Handset	Page 1 of 74

## TABLE OF CONTENTS

1.0	INTRODUCTION.....	4
1.1	Scope .....	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations .....	4
2.0	PRODUCT INFORMATION .....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities .....	5
2.3	Test Configuration .....	6
2.4	Antenna Description .....	6
2.5	Software and Firmware .....	7
2.6	EMI Suppression Device(s)/Modifications .....	7
3.0	DESCRIPTION OF TESTS .....	8
3.1	Evaluation Procedure .....	8
3.2	Radiated Emissions.....	8
3.3	Environmental Conditions.....	8
4.0	ANTENNA REQUIREMENTS .....	9
5.0	MEASUREMENT UNCERTAINTY.....	10
6.0	TEST EQUIPMENT CALIBRATION DATA.....	11
7.0	TEST RESULTS.....	12
7.1	Summary .....	12
7.2	6dB Bandwidth Measurement .....	14
7.2.1	MIMO 6 dB Bandwidth Measurements .....	16
7.3	Output Power Measurement.....	22
7.4	Power Spectral Density .....	27
7.4.1	MIMO Power Spectral Density Measurements .....	29
7.5	Conducted Band Edge Emissions .....	36
7.5.1	MIMO Conducted Band Edge Emissions .....	37
7.6	Conducted Spurious Emissions.....	45
7.6.1	MIMO Conducted Spurious Emissions .....	47
7.7	Radiated Emission Measurements.....	59
7.7.2	MIMO Radiated Spurious Emission Measurements .....	63
7.7.3	MIMO Radiated Restricted Band Edge Measurements .....	69
8.0	CONCLUSION .....	74

<b>FCC ID:</b> A3LSMS928JPN	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2312110124-07.A3L	<b>Test Dates:</b> 9/6/2023 - 11/06/2023	<b>EUT Type:</b> Portable Handset	Page 2 of 74

# MEASUREMENT REPORT

Channel Bandwidth [MHz]	IEEE Mode	Tones	Tx Frequency [MHz]	Antenna-1				Antenna-2				MIMO			
				Avg. Conducted		Peak Conducted		Avg. Conducted		Peak Conducted		Avg. Conducted		Peak Conducted	
				Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]	Max. Power [mW]	Max. Power [dBm]
20	802.11ax/be OFDMA	26T	2412 - 2472	24.72	13.93	165.58	22.19	24.98	13.98	158.12	21.99	49.16	16.92	332.30	25.22
	802.11ax/be OFDMA	52T	2412 - 2472	31.33	14.96	196.79	22.94	31.55	14.99	204.46	23.11	61.52	17.89	393.09	25.94
	802.11be OFDMA	52+26T	2412 - 2472	30.48	14.84	194.54	22.89	30.41	14.83	198.61	22.98	60.49	17.82	377.96	25.77
	802.11ax/be OFDMA	106T	2412 - 2472	49.20	16.92	368.98	25.67	50.00	16.99	336.51	25.27	98.87	19.95	688.02	28.38
	802.11be OFDMA	106+26T	2412 - 2472	49.89	16.98	350.75	25.45	50.00	16.99	313.47	24.96	90.61	19.57	639.73	28.06
	802.11ax/be OFDMA	242T	2412 - 2472	60.39	17.81	451.86	26.55	60.53	17.82	432.51	26.36	111.43	20.47	849.05	29.29

## EUT Overview

<b>FCC ID:</b> A3LSMS928JPN	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2312110124-07.A3L	<b>Test Dates:</b> 9/6/2023 - 11/06/2023	<b>EUT Type:</b> Portable Handset	Page 3 of 74

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 Element Test Location

These measurement tests were conducted at the Element laboratory facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

### 1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 4 of 74

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMS928JPN**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

**Test Device Serial No.:** 0042M, 0085M, 0900M

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1), 802.11b/g/n/ax/be WLAN, 802.11a/n/ac/ax/be UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer, UWB

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442		

**Table 2-1. Frequency/ Channel Operations**

#### Notes:

1. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of ANSI C63.10-2013 and KDB 558074 D01 v05r02. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Mode	Antenna	Bandwidth	Channel	Tone	Duty Cycle
		[MHz]			
802.11be DTS RU	1/2	20	6	26T	99.44
				52T	99.46
				52T+26T	99.26
				106T	98.97
				106T+26T	98.73
				242T	98.78
802.11be DTS RU	MIMO	20	6	26T	98.94
				52T	98.99
				52T+26T	98.64
				106T	98.19
				106T+26T	97.81
				242T	97.80

**Table 2-2. Measured Duty Cycles**

<b>FCC ID:</b> A3LSMS928JPN	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2312110124-07.A3L	<b>Test Dates:</b> 9/6/2023 - 11/06/2023	<b>EUT Type:</b> Portable Handset	Page 5 of 74



2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
2.4GHz	11ax	✓	✓	✓	✓	✓	✓
2.4GHz	11be	✓	✓	✓	✓	✓	✓

**Table 2-3. Antenna Configuration**

✓ = Support ; ✗ = NOT Support

**SISO** = Single Input Single Output

**SDM** = Spatial Diversity Multiplexing – MIMO function

**CDD** = Cyclic Delay Diversity - 2Tx Function

3. The device supports the following data rates (shown in Mbps):

MCS Index	Spatial Stream	OFDMA (802.11ax)											
		26T			52T			106T			242T		
		0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI	0.8µs GI	1.6µs GI	3.2µs GI
0	1	0.9	0.8	0.8	1.8	1.7	1.5	3.8	3.5	3.2	8.6	8.1	7.3
1	1	1.8	1.7	1.5	3.5	3.3	3	7.5	7.1	6.4	17.2	16.3	14.6
2	1	2.6	2.5	2.3	5.3	5	4.5	11.3	10.6	9.6	25.8	24.4	21.9
3	1	3.5	3.3	3	7.1	6.7	6	15	14.2	12.8	34.4	32.5	29.3
4	1	5.3	5	4.5	10.6	10	9	22.5	21.3	19.1	51.6	48.8	43.9
5	1	7.1	6.7	6	14.1	13.3	12	30	28.3	25.5	68.8	65	58.5
6	1	7.9	7.5	6.8	15.9	15	13.5	33.8	31.9	28.7	77.4	73.1	65.8
7	1	8.8	8.3	7.5	17.6	16.7	15	37.5	35.4	31.9	86	81.3	73.1
8	1	10.6	10	9	21.2	20	18	45	42.5	38.3	103.2	97.5	87.8
9	1	11.8	11.1	10	23.5	22.2	20	50	47.2	42.5	114.7	108.3	97.5
10	1	13.2	12.5	11.3	26.5	25	22.5	56.3	53.1	47.8	129	121.9	109.7
11	1	14.7	13.9	12.5	29.4	27.8	25	62.5	59	53.1	143.4	135.4	121.9
0	2	1.8	1.7	1.5	3.5	3.3	3	7.5	7.1	6.4	17.2	16.3	14.6
1	2	3.5	3.3	3	7.1	6.7	6	15	14.2	12.8	34.4	32.5	29.3
2	2	5.3	5	4.5	10.6	10	9	22.5	21.3	19.1	51.6	48.8	43.9
3	2	7.1	6.7	6	14.1	13.3	12	30	28.3	25.5	68.8	65	58.5
4	2	10.6	10	9	21.2	20	18	45	42.5	38.3	103.2	97.5	87.8
5	2	14.1	13.3	12	28.2	26.7	24	60	56.7	51	137.6	130	117
6	2	15.9	15	13.5	31.8	30	27	67.5	63.8	57.4	154.9	146.3	131.6
7	2	17.6	16.7	15	35.3	33.3	30	75	70.8	63.8	172.1	162.5	146.3
8	2	21.2	20	18	42.4	40	36	90	85	76.5	206.5	195	175.5
9	2	23.5	22.2	20	47.1	44.4	40	100	94.4	85	229.4	216.7	195
10	2	26.5	25	22.5	52.9	50	45	112.5	106.3	95.6	258.1	243.8	219.4
11	2	29.4	27.8	25	58.8	55.6	50	125	118.1	106.3	286.8	270.8	243.8

**Table 2-4. Supported Data Rates**

## 2.3 Test Configuration

ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing. See Sections 0 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5, and 7.6 for antenna port conducted emissions test setups.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) EP-P2400 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

## 2.4 Antenna Description

The following antenna gains were used for the testing.

Frequency [GHz]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Directional Gain [dBi]
2.4	-1.05	-3.52	0.81

**Table 2-5. Antenna Peak Gain**

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 6 of 74



## 2.5 Software and Firmware

The test was conducted with software/firmware version S928USQU0AW19 installed on the EUT.

## 2.6 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

<b>FCC ID:</b> A3LSMS928JPN	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2312110124-07.A3L	<b>Test Dates:</b> 9/6/2023 - 11/06/2023	<b>EUT Type:</b> Portable Handset	Page 7 of 74

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

**Deviation from measurement procedure.....None**

### 3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

### 3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 8 of 74



## 4.0 ANTENNA REQUIREMENTS

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

**Conclusion:**

The EUT unit complies with the requirement of §15.203.

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 9 of 74

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 10 of 74

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2-001	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	AP2-001
-	ETS-001	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	ETS-001
-	ETS-002	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	ETS-002
-	MD 1M 18-40	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	MD 1M 18-40
-	WL40-1	Conducted Cable Set (40GHz)	1/12/2023	Annual	1/12/2024	WL40-1
-	WL25-1	Conducted Cable Set (25GHz)	1/12/2023	Annual	1/12/2024	WL25-1
Anritsu	MA24406A	Microwave Peak Power Sensor	9/7/2023	Annual	9/7/2024	11240
Emco	3115	Horn Antenna (1-18GHz)	8/8/2022	Biennial	8/8/2024	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	7/5/2022	Biennial	7/5/2024	9203-2178
Pastermack	MNLC-2	Line Conducted Emission Cable (NM)	1/11/2023	Annual	1/11/2024	NMLC-2
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	8/11/2022	Biennial	8/11/2024	114451
ETS Lindgren	3116C	1-18 GHz DRG Horn Antenna	2/27/2023	Biennial	2/27/2024	00218893
ETS Lindgren	3115	Double Ridged Guide Horn	4/12/2022	Biennial	4/12/2024	82333
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	4/13/2022	Biennial	4/13/2025	121034
Keysight Technologies	N9020A	MXA Signal Analyzer	3/15/2023	Annual	3/15/2024	MY54500644
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	3/15/2023	Annual	3/15/2024	MY52350166
Keysight Technologies	N9030A	PXA Signal Analyzer	1/31/2023	Annual	1/31/2024	MY55410501
Keysight Technologies	N9030B	PXA Signal Analyzer, Multi-touch	9/7/2023	Annual	9/7/2024	MY57141001
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	9/25/2023	Annual	9/25/2024	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/11/2023	Annual	9/11/2024	100348
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	3/1/2023	Annual	3/1/2024	101716
Rohde & Schwarz	FSW26	2Hz-26.5GHz Signal and Spectrum Analyzer	11/6/2022	Annual	11/6/2023	103187
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	1/13/2023	Annual	1/13/2024	103200
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	2/21/2023	Biennial	2/21/2025	A051107
Sunol	JB6	LB6 Antenna	3/2/2023	Biennial	3/2/2025	A082816

**Table 6-1. Annual Test Equipment Calibration Schedule**

**Note:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMS928JPN	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 11 of 74

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSMS928JPN  
 FCC Classification: Digital Transmission System (DTS)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2(a)]	6dB Bandwidth	The minimum 6 dB bandwidth shall be at least 500 kHz.	CONDUCTED	PASS	Section 7.2
15.247(b)(3)	RSS-247 [5.4(b)]	Transmitter Output Power	shall not exceed 1 W		PASS	Section 7.3
N/A	RSS-247 [5.4(b)]	e.i.r.p	Shall not exceed 4 W		PASS	Section 7.3
15.247(e)	RSS-247 [5.2(b)]	Transmitter Power Spectral Density	shall not be greater than 8 dBm in any 3 kHz band		PASS	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	≥ 20dBc		PASS	Sections 7.5, 7.6
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])	RADIATED	PASS	Section 7.7

**Table 7-1. Summary of Test Results**

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "WLAN Automation," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.3.1.
- 6) 802.11ax OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 12 of 74



7) Data was leveraged from test report 1M2308210092-14, FCC ID: A3LSMS928U. See Table 7-2 and Table 7-3 for results.

FCC Rules	Test Item	Test Case	Units	Limit	Reference FCC ID: A3LSMS928U	Variation FCC ID: A3LSMS928JPN	Deviation	Max Deviation	Pass/Fail
15.407(e)	6dB Bandwidth	Ch.157, 802.11a, MIMO, Ant2	MHz	>.5	16.40	16.41	0.01	N/A	PASS
2.1049	26dB Bandwidth/Occupied Bandwidth	Ch.48, 802.11be, MIMO, Ant1	MHz	N/A	21.80	22.37	0.57	N/A	PASS
15.407(a)(1)(iv), 15.407(a)(2), 15.407(a)(3)	Power Spectral Density	Ch.144, 802.11a, MIMO	dBm	11	10.18	9.23	0.95	3	PASS
15.209, 15.407(b)(1), 15.407(b)(2), 15.407(b)(3), 15.407(b)(4)	Radiated Spurious Emissions	Ch.2, 802.11a, MIMO, Average	dBm	53.98	42.51	41.99	0.52	3	PASS
15.209	Radiated Band Edge Emissions	Ch.62, 802.11a, MIMO	dBm	53.98	51.93	51.22	0.71	3	PASS

**Table 7-2. Summary of Spot-checks**

Freq [MHz]	Channel	Tones	RU Index	Referenced Data			Variant Data			Delta	Delta Limit	Re-use Verdict
				Conducted Power [dBm]			Conducted Power [dBm]					
				Antenna-1	Antenna-2	MIMO	Antenna-1	Antenna-2	MIMO			
				AVG	AVG	AVG	AVG	AVG	AVG			
2437	6	26T	0	13.79	13.51	16.66	13.68	13.47	16.59	0.08	1.00	PASS
			4	13.75	13.35	16.56	13.65	13.41	16.54	0.02	1.00	PASS
			8	13.73	13.81	16.78	13.66	13.72	16.70	0.08	1.00	PASS
2437	6	52T	37	14.80	14.51	17.67	14.71	14.43	17.58	0.09	1.00	PASS
			38	14.71	14.18	17.46	14.66	14.21	17.45	0.01	1.00	PASS
			40	14.69	14.81	17.76	14.56	14.93	17.76	0.00	1.00	PASS
2437	6	106T	53	16.93	16.44	19.70	16.77	16.52	19.66	0.05	1.00	PASS
			54	16.82	16.65	19.75	16.72	16.71	19.73	0.02	1.00	PASS
2437	6	242T	61	17.59	17.24	20.43	17.44	17.32	20.39	0.04	1.00	PASS

**Table 7-3. Conducted Power Spot-checks**

<b>FCC ID:</b> A3LSMS928JPN	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2312110124-07.A3L	<b>Test Dates:</b> 9/6/2023 - 11/06/2023	<b>EUT Type:</b> Portable Handset	Page 13 of 74

## 7.2 6dB Bandwidth Measurement

### Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst-case configuration results are reported in this section.

***The minimum 6 dB bandwidth shall be at least 500 kHz.***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-1. Test Instrument & Measurement Setup**

### Test Notes

1. Based on preliminary measurements, it was determined that, of all the tone configurations, the 26T configuration produced the worst case 6dB Bandwidth measurement. Only the worst-case data is included in this section.
2. The 6dB bandwidth for each channel was measured with the RU index showing the highest conducted power.

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 14 of 74




## 6dB Bandwidth Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	ANT 1 Measured Bandwidth [MHz]	ANT 2 Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
2412	1	ax	26T	MCS0	2.746	2.735	0.500
2437	6	ax	26T	MCS0	2.078	2.093	0.500
2462	11	ax	26T	MCS0	2.129	2.084	0.500
2412	1	ax	242T	MCS0	19.02	18.99	0.500
2437	6	ax	242T	MCS0	19.01	19.02	0.500
2462	11	ax	242T	MCS0	19.04	18.97	0.500


**Table 7-4. Conducted 6dB Bandwidth Measurements MIMO**

<b>FCC ID:</b> A3LSMS928JPN	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2312110124-07.A3L	<b>Test Dates:</b> 9/6/2023 - 11/06/2023	<b>EUT Type:</b> Portable Handset	Page 15 of 74

## 7.2.1 MIMO 6 dB Bandwidth Measurements

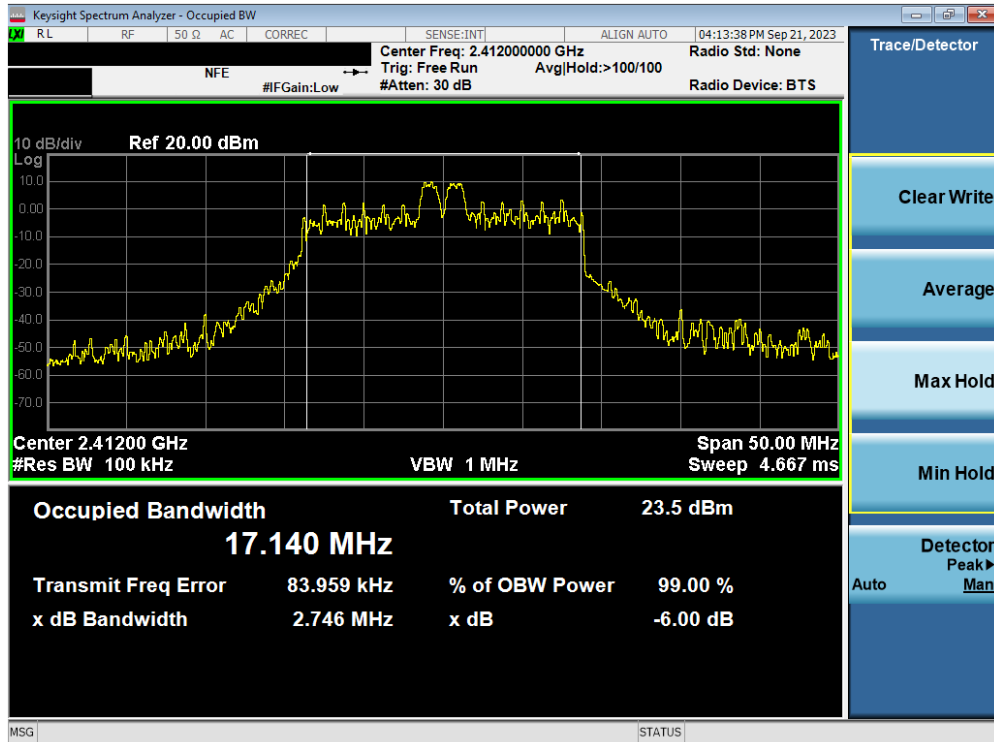


Plot 7-1. 6dB Bandwidth Plot MIMO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 1)

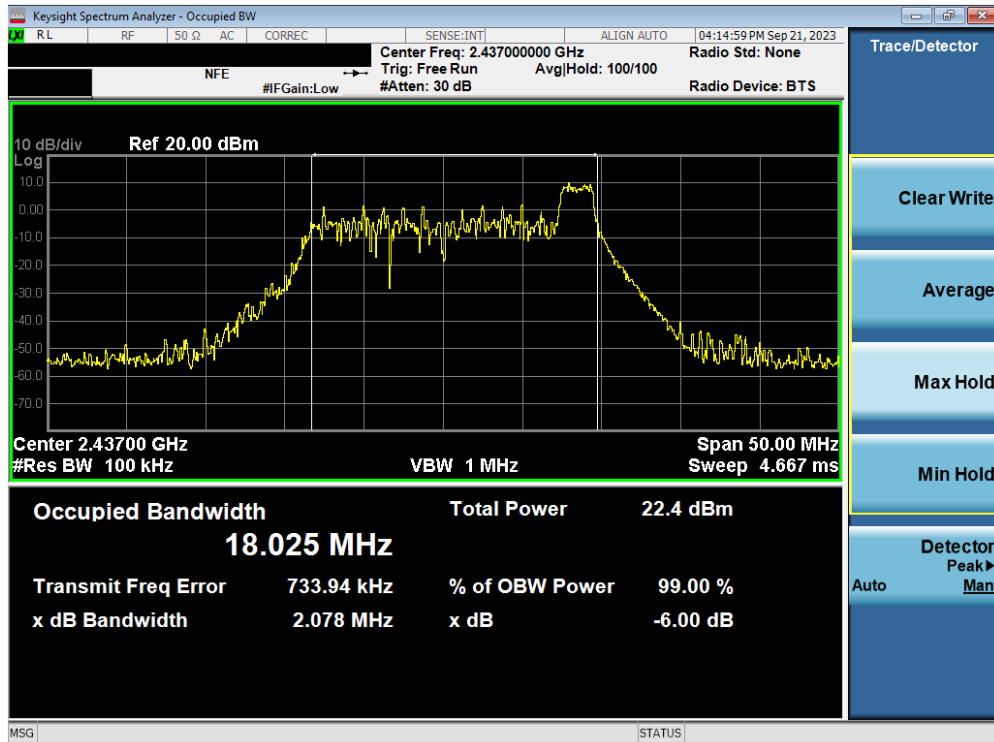


Plot 7-2. 6dB Bandwidth Plot MIMO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 6)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 16 of 74



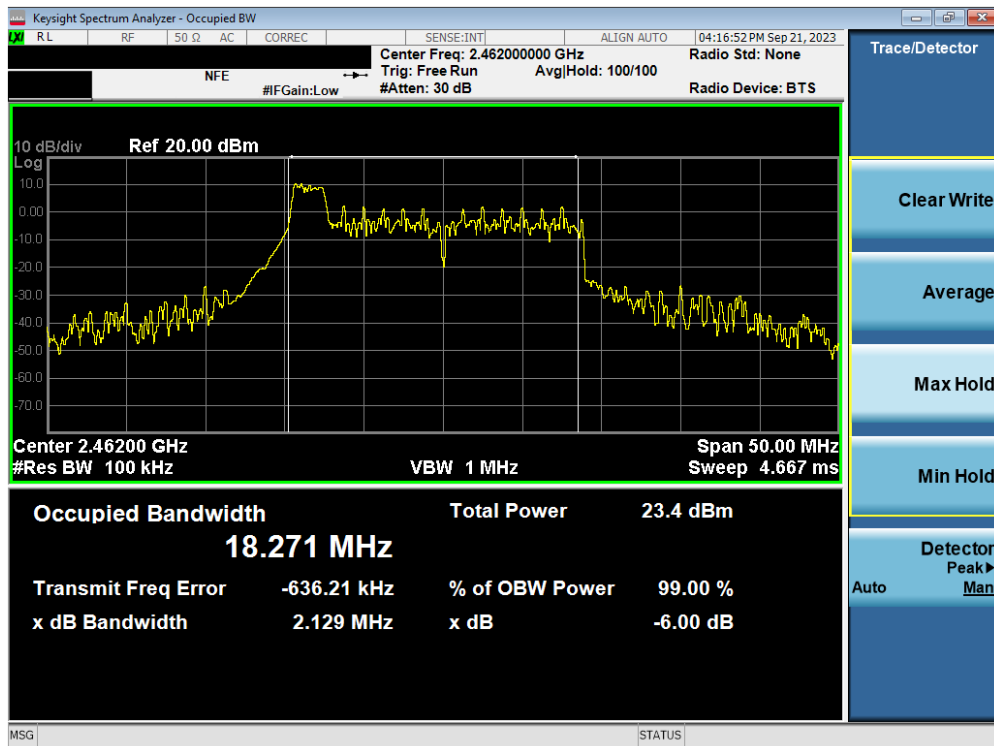


Plot 7-3. 6dB Bandwidth Plot MIMO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 11)

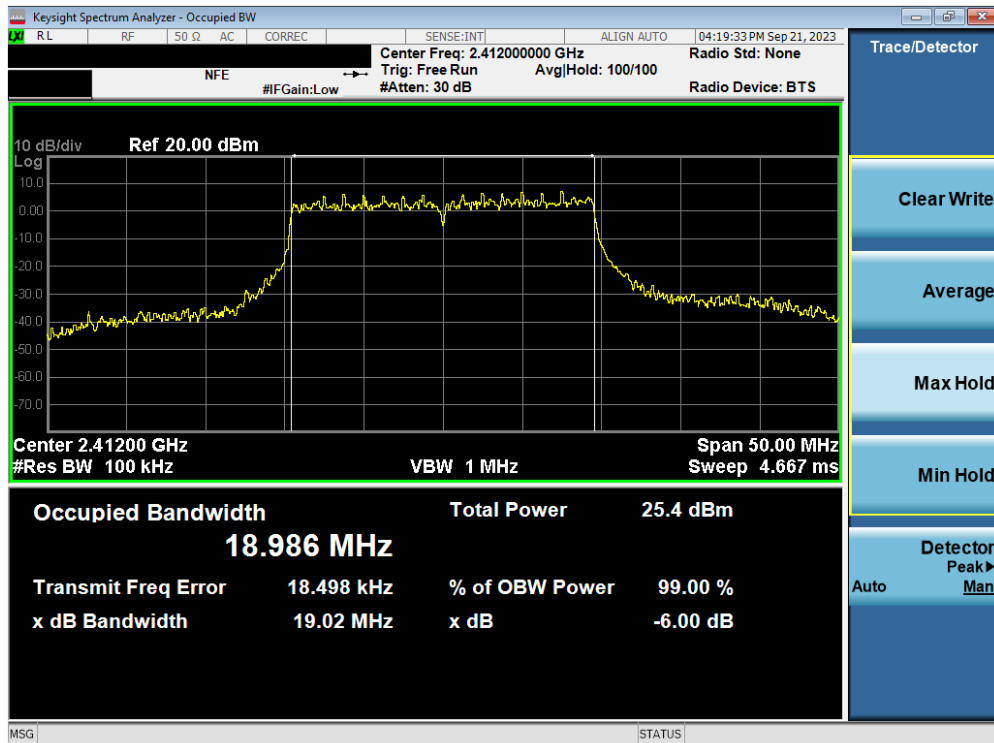


Plot 7-4. 6dB Bandwidth Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 1)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 17 of 74

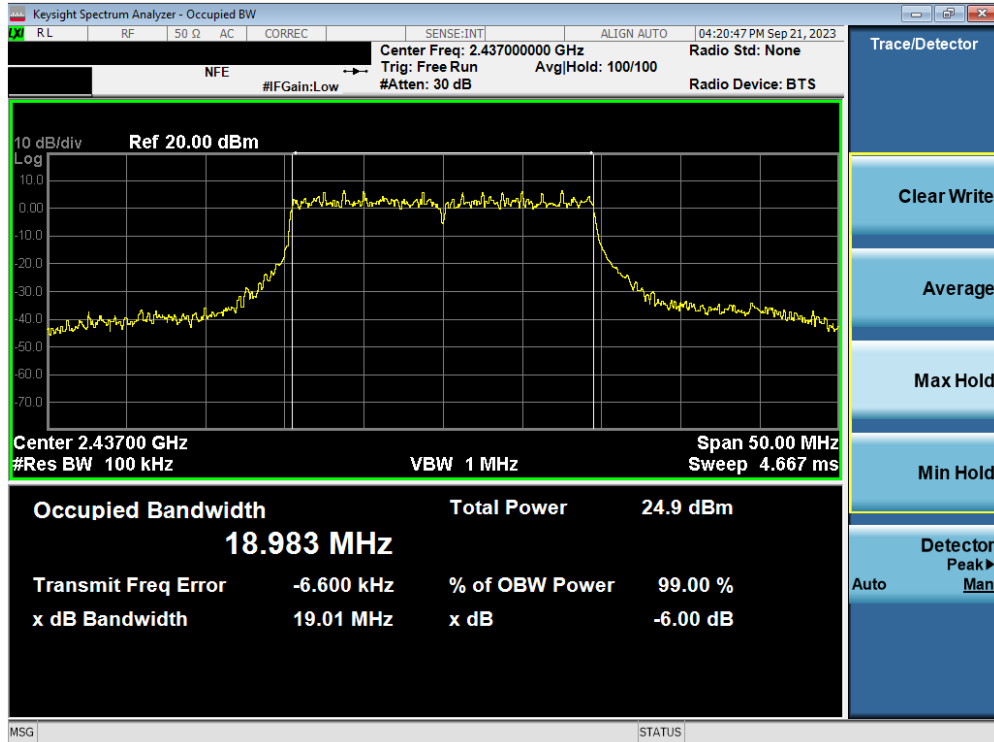


Plot 7-5. 6dB Bandwidth Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 6)

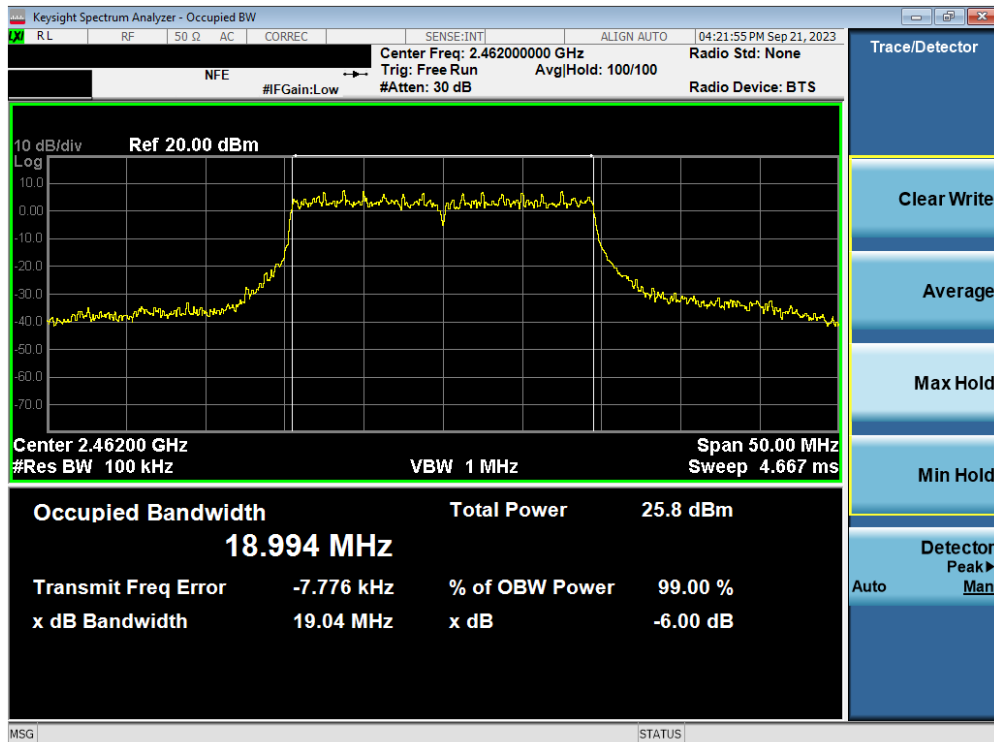


Plot 7-6. 6dB Bandwidth Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 18 of 74

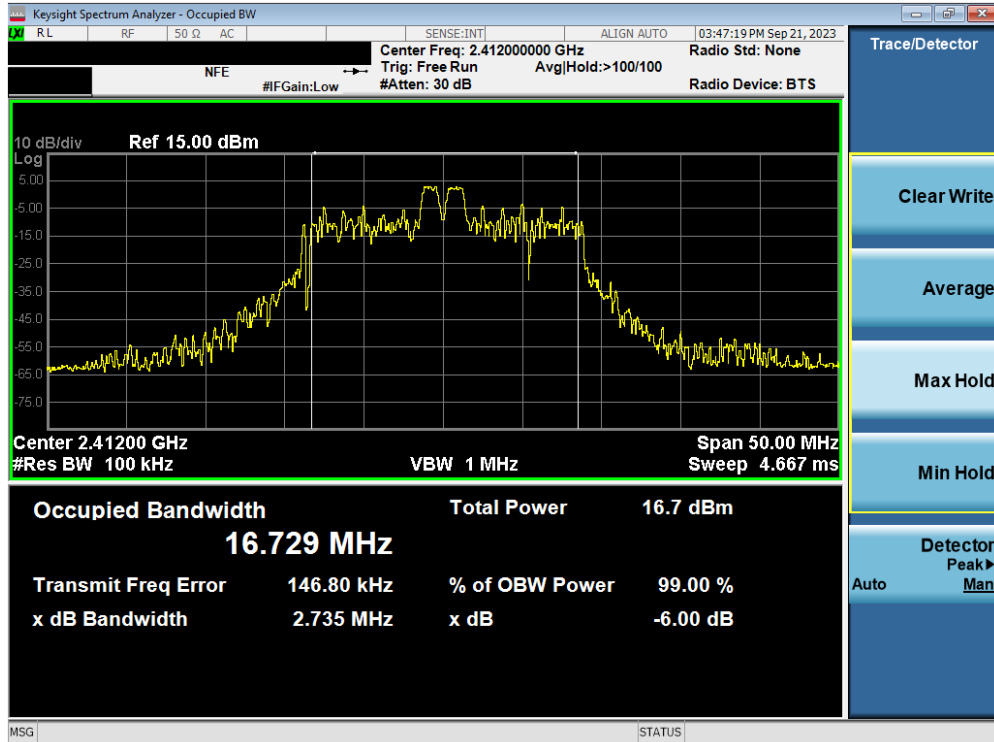


Plot 7-7. 6dB Bandwidth Plot MIMO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 1)

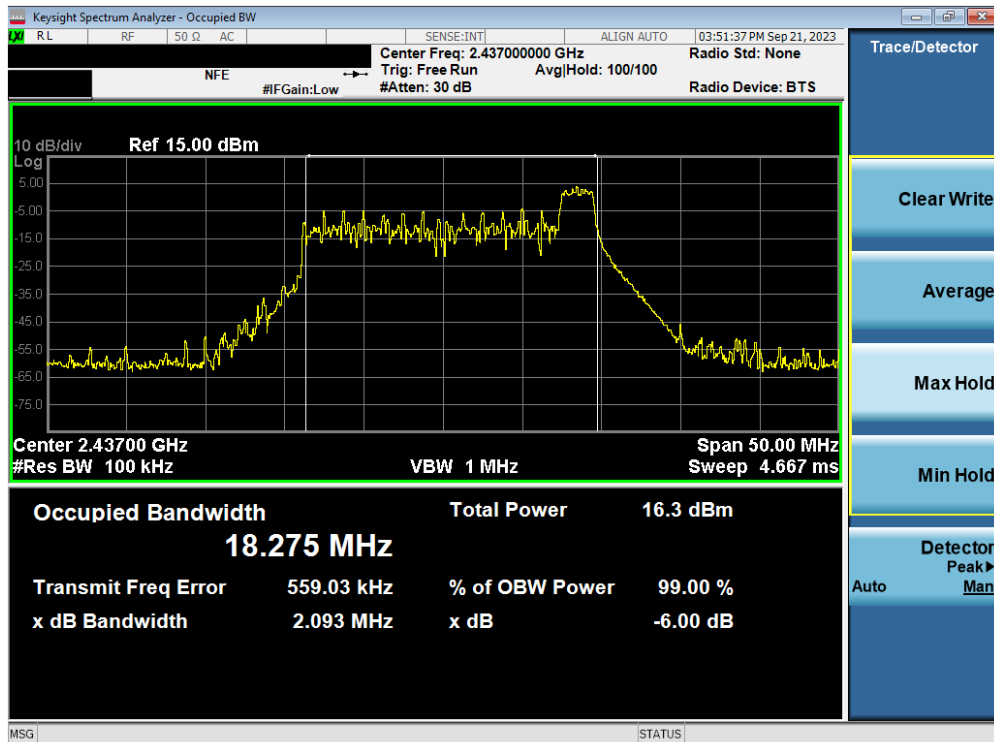


Plot 7-8. 6dB Bandwidth Plot MIMO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 6)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 19 of 74

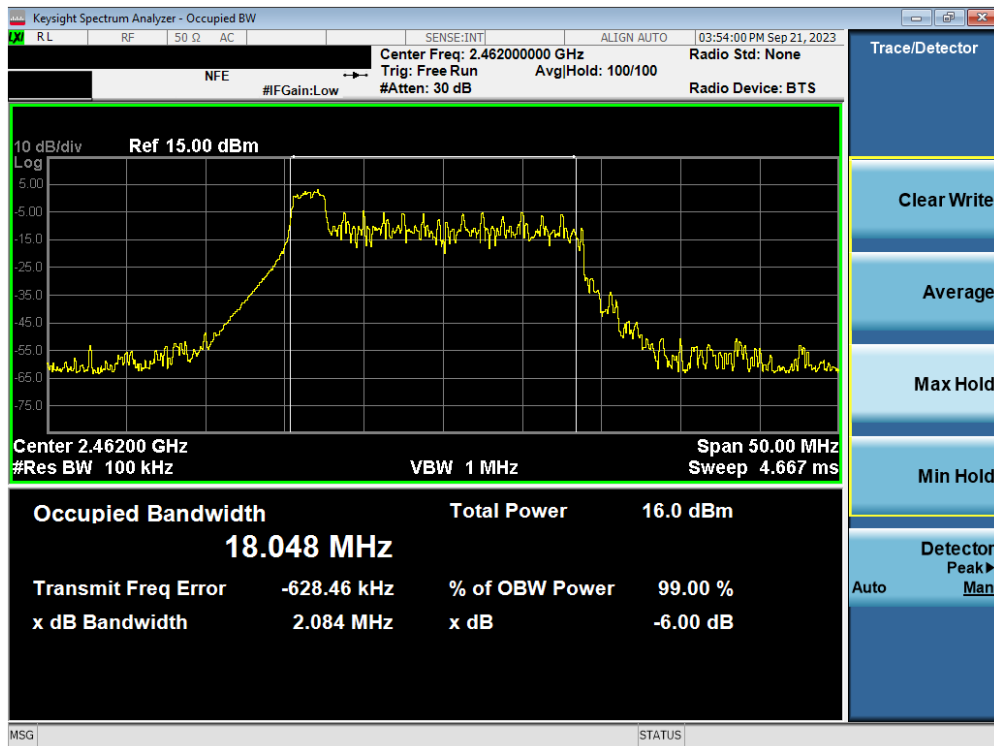


Plot 7-9. 6dB Bandwidth Plot MIMO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 11)

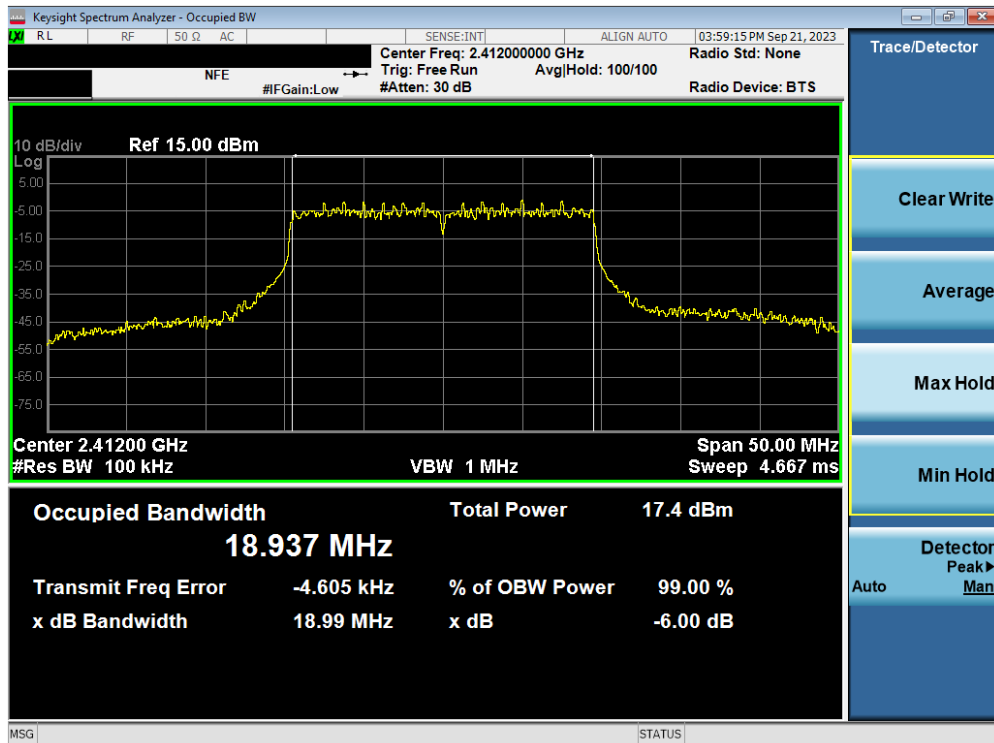


Plot 7-10. 6dB Bandwidth Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 1)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 20 of 74

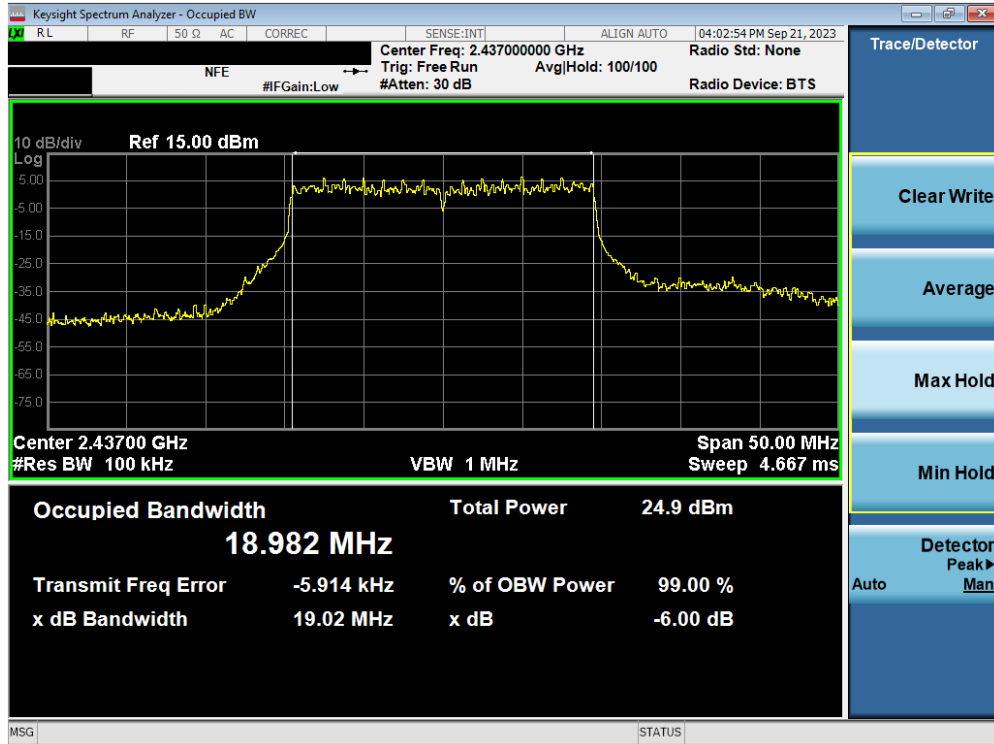

Plot 7-11. 6dB Bandwidth Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 6)

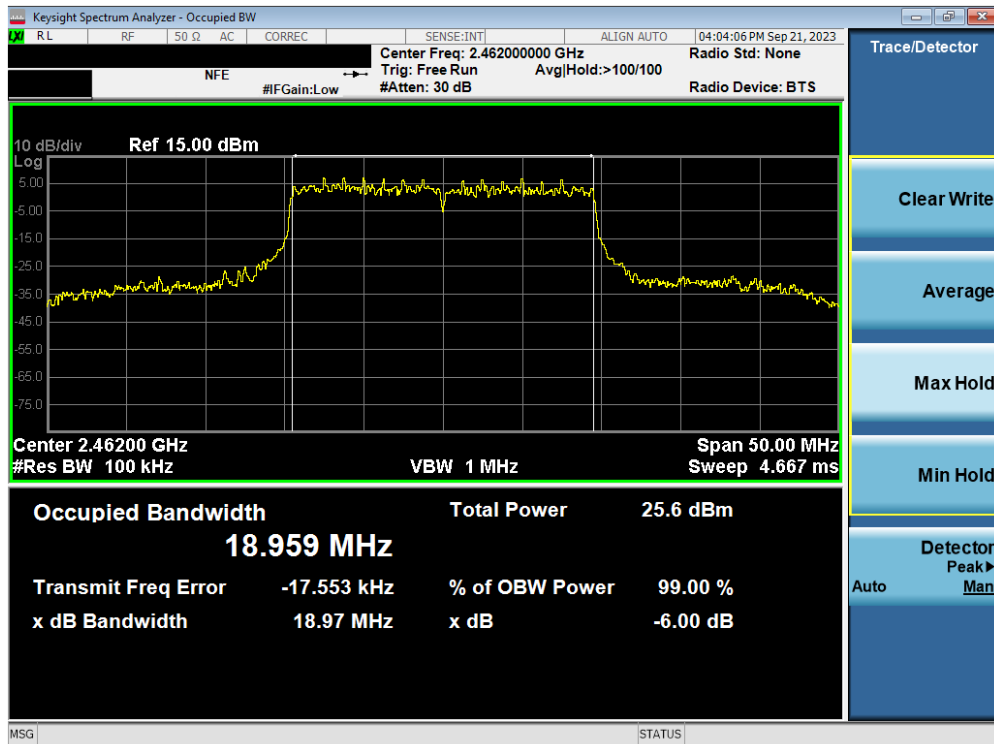

Plot 7-12. 6dB Bandwidth Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 21 of 74

## 7.3 Output Power Measurement

### Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

***The maximum permissible conducted output power is 1 Watt per 15.247 and RSS-247. The e.i.r.p. shall not exceed 4 W per RSS-247.***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3 PKPM1 Peak Power Method  
 ANSI C63.10-2013 – Section 11.9.2.3.2 Method AVGPM-G  
 ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

### Test Settings

#### Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

#### Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



**Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements**

### Test Notes

None.

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 22 of 74

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
2412	1	26T	0	13.61	21.91	30.00	-16.39	-8.09	-1.05	20.86	36.02	-15.16
			4	13.77	22.16	30.00	-16.23	-7.84	-1.05	21.11	36.02	-14.91
			8	13.91	21.66	30.00	-16.09	-8.34	-1.05	20.61	36.02	-15.41
2437	6	26T	0	13.87	21.63	30.00	-16.13	-8.37	-1.05	20.58	36.02	-15.44
			4	13.54	21.90	30.00	-16.46	-8.10	-1.05	20.85	36.02	-15.17
			8	13.83	21.86	30.00	-16.17	-8.14	-1.05	20.81	36.02	-15.21
2462	11	26T	0	13.93	21.56	30.00	-16.07	-8.44	-1.05	20.51	36.02	-15.51
			4	13.80	22.19	30.00	-16.20	-8.05	-1.05	21.14	36.02	-14.88
			8	13.79	21.72	30.00	-16.21	-8.28	-1.05	20.67	36.02	-15.35
2467	12	26T	0	1.23	10.21	30.00	-28.77	-19.79	-1.05	9.16	36.02	-26.86
			4	1.55	10.22	30.00	-28.45	-19.78	-1.05	9.17	36.02	-26.85
			8	1.62	10.63	30.00	-28.38	-19.37	-1.05	9.58	36.02	-26.44
2472	13	26T	0	-4.70	5.98	30.00	-34.70	-24.02	-1.05	4.93	36.02	-31.09
			4	-4.62	5.44	30.00	-34.62	-24.56	-1.05	4.39	36.02	-31.63
			8	-4.52	5.63	30.00	-34.52	-24.37	-1.05	4.58	36.02	-31.44

**Table 7-5. Conducted Output Power Measurements SISO ANT1 (26 Tones)**

Tones	RU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
52T	37	14.53	22.88	30.00	-15.47	-7.12	-1.05	21.83	36.02	-14.19
	38	14.58	22.87	30.00	-15.42	-7.13	-1.05	21.82	36.02	-14.20
	40	14.79	22.54	30.00	-15.21	-7.46	-1.05	21.49	36.02	-14.53
52T	37	14.90	21.77	30.00	-15.10	-8.23	-1.05	20.72	36.02	-15.30
	38	14.88	21.72	30.00	-15.12	-8.28	-1.05	20.67	36.02	-15.35
	40	14.96	21.71	30.00	-15.04	-8.29	-1.05	20.66	36.02	-15.36
52T	37	14.77	22.75	30.00	-15.23	-7.25	-1.05	21.70	36.02	-14.32
	38	14.92	22.94	30.00	-15.08	-7.06	-1.05	21.89	36.02	-14.13
	40	14.69	22.62	30.00	-15.31	-7.38	-1.05	21.57	36.02	-14.45
52T	37	2.22	11.24	30.00	-27.78	-18.76	-1.05	10.19	36.02	-25.83
	38	2.42	11.24	30.00	-27.58	-18.76	-1.05	10.19	36.02	-25.83
	40	2.33	11.63	30.00	-27.67	-18.37	-1.05	10.58	36.02	-25.44
52T	37	-3.63	6.89	30.00	-33.63	-23.11	-1.05	5.84	36.02	-30.18
	38	-3.14	7.01	30.00	-33.14	-22.99	-1.05	5.96	36.02	-30.06
	40	-3.45	7.11	30.00	-33.45	-22.89	-1.05	6.06	36.02	-29.96

**Table 7-6. Conducted Output Power Measurements SISO ANT1 (52 Tones)**

Tones	RU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
106T	53	16.81	25.67	30.00	-4.33	-4.33	-1.05	24.62	36.02	-11.40
	54	16.54	24.44	30.00	-5.56	-5.56	-1.05	23.39	36.02	-12.63
106T	53	16.82	25.25	30.00	-4.75	-4.75	-1.05	24.20	36.02	-11.82
	54	16.92	25.19	30.00	-4.81	-4.81	-1.05	24.14	36.02	-11.88
106T	53	16.72	24.59	30.00	-5.41	-5.41	-1.05	23.54	36.02	-12.48
	54	16.65	24.49	30.00	-5.51	-5.51	-1.05	23.44	36.02	-12.58
106T	53	4.21	13.32	30.00	-16.68	-16.68	-1.05	12.27	36.02	-23.75
	54	4.44	13.47	30.00	-16.53	-16.53	-1.05	12.42	36.02	-23.60
106T	53	-1.52	9.21	30.00	-20.79	-20.79	-1.05	8.16	36.02	-27.86
	54	-1.40	9.11	30.00	-20.89	-20.89	-1.05	8.06	36.02	-27.96

**Table 7-7. Conducted Output Power Measurements SISO ANT1 (106 Tones)**

Tones	RU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Γ	61	15.58	25.22	30.00	-4.78	-4.78	-1.05	24.17	36.02	-11.85
Γ	61	17.75	26.45	30.00	-3.55	-3.55	-1.05	25.40	36.02	-10.62
Γ	61	17.81	26.55	30.00	-3.45	-3.45	-1.05	25.50	36.02	-10.52
Γ	61	17.52	26.32	30.00	-3.68	-3.68	-1.05	25.27	36.02	-10.75
Γ	61	15.62	25.18	30.00	-4.82	-4.82	-1.05	24.13	36.02	-11.89
Γ	61	5.69	14.22	30.00	-15.78	-15.78	-1.05	13.17	36.02	-22.85
Γ	61	-0.52	10.21	30.00	-19.79	-19.79	-1.05	9.16	36.02	-26.86

**Table 7-8. Conducted Output Power Measurements SISO ANT1 (242 Tones)**

Freq [MHz]	Channel	Tones	MRU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
2437	6	52+26T	71	14.73	22.87	30.00	-15.27	-7.13	-1.05	21.82	36.02	-14.20

**Table 7-9. Conducted Output Power Measurements SISO ANT1 (52+26 Tones)**

<b>FCC ID:</b> A3LSMS928JPN	<b>MEASUREMENT REPORT</b>						<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2312110124-07.A3L	<b>Test Dates:</b> 9/6/2023 - 11/06/2023	<b>EUT Type:</b> Portable Handset				Page 23 of 74	

Freq [MHz]	Channel	Tones	MRU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
2412	1	106+26T	82	16.85	25.29	30.00	-4.71	-4.71	-1.05	24.24	36.02	-11.78
			83	16.89	25.19	30.00	-4.81	-4.81	-1.05	24.14	36.02	-11.88
2462	11	106+26T	82	16.66	24.73	30.00	-5.27	-5.27	-1.05	23.68	36.02	-12.34
			83	16.61	24.69	30.00	-5.31	-5.31	-1.05	23.64	36.02	-12.38

**Table 7-10. Conducted Output Power Measurements SISO ANT1 (106+26 Tones)**

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
2412	1	26T	0	13.80	21.34	30.00	-16.21	-8.66	-3.52	10.28	36.02	-25.75
			4	13.22	21.62	30.00	-16.78	-8.38	-3.52	9.70	36.02	-26.32
			8	13.97	21.94	30.00	-16.03	-8.06	-3.52	10.45	36.02	-25.57
2437	6	26T	0	13.82	21.39	30.00	-16.18	-8.61	-3.52	10.30	36.02	-25.72
			4	13.38	21.99	30.00	-16.62	-8.01	-3.52	9.86	36.02	-26.16
			8	13.94	21.93	30.00	-16.06	-8.07	-3.52	10.42	36.02	-25.60
2462	11	26T	0	13.98	21.13	30.00	-16.02	-8.87	-3.52	10.46	36.02	-25.56
			4	13.69	21.92	30.00	-16.32	-8.08	-3.52	10.17	36.02	-25.86
			8	13.58	21.98	30.00	-16.42	-8.02	-3.52	10.06	36.02	-25.96
2467	12	26T	0	1.32	10.17	30.00	-28.68	-19.83	-3.52	-2.20	36.02	-38.22
			4	1.27	10.22	30.00	-28.73	-19.78	-3.52	-2.25	36.02	-38.27
			8	1.44	10.27	30.00	-28.56	-19.73	-3.52	-2.08	36.02	-38.10
2472	13	26T	0	-4.63	5.82	30.00	-34.63	-24.18	-3.52	-8.15	36.02	-44.17
			4	-4.42	5.66	30.00	-34.42	-24.34	-3.52	-7.94	36.02	-43.96
			8	-4.32	5.42	30.00	-34.32	-24.58	-3.52	-7.84	36.02	-43.86

**Table 7-11. Conducted Output Power Measurements SISO ANT2 (26 Tones)**

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
2412	1	52T	37	14.69	22.84	30.00	-15.32	-7.16	-3.52	11.17	36.02	-24.86
			38	14.77	22.55	30.00	-15.23	-7.45	-3.52	11.25	36.02	-24.77
			40	14.83	22.47	30.00	-15.17	-7.53	-3.52	11.31	36.02	-24.71
2437	6	52T	37	14.74	22.75	30.00	-15.26	-7.25	-3.52	11.22	36.02	-24.80
			38	14.99	23.11	30.00	-15.01	-6.89	-3.52	11.47	36.02	-24.55
			40	14.88	22.90	30.00	-15.13	-7.10	-3.52	11.36	36.02	-24.67
2462	11	52T	37	14.99	22.91	30.00	-15.01	-7.09	-3.52	11.47	36.02	-24.55
			38	14.98	22.55	30.00	-15.02	-7.45	-3.52	11.46	36.02	-24.56
			40	14.70	23.01	30.00	-15.30	-6.99	-3.52	11.18	36.02	-24.84
2467	12	52T	37	2.32	11.32	30.00	-27.68	-18.68	-3.52	-1.20	36.02	-37.22
			38	2.11	11.42	30.00	-27.89	-18.58	-3.52	-1.41	36.02	-37.43
			40	2.52	11.44	30.00	-27.48	-18.56	-3.52	-1.00	36.02	-37.02
2472	13	52T	37	-3.57	6.80	30.00	-33.57	-23.20	-3.52	-7.09	36.02	-43.11
			38	-3.22	7.12	30.00	-33.22	-22.88	-3.52	-6.74	36.02	-42.76
			40	-3.87	7.21	30.00	-33.87	-22.79	-3.52	-7.39	36.02	-43.41

**Table 7-12. Conducted Output Power Measurements SISO ANT2 (52 Tones)**

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
2412	1	106T	53	16.10	24.08	30.00	-13.90	-5.92	-3.52	12.58	36.02	-23.44
			54	16.35	24.11	30.00	-13.66	-5.89	-3.52	12.83	36.02	-23.20
2437	6	106T	53	16.99	24.88	30.00	-13.01	-5.12	-3.52	13.47	36.02	-22.55
			54	16.98	24.99	30.00	-13.02	-5.01	-3.52	13.46	36.02	-22.56
2462	11	106T	53	16.90	24.65	30.00	-13.10	-5.35	-3.52	13.38	36.02	-22.64
			54	16.44	25.27	30.00	-13.57	-4.73	-3.52	12.92	36.02	-23.11
2467	12	106T	53	4.42	13.27	30.00	-25.58	-16.73	-3.52	0.90	36.02	-35.12
			54	4.37	13.52	30.00	-25.63	-16.48	-3.52	0.85	36.02	-35.17
2472	13	106T	53	-1.38	9.28	30.00	-31.38	-20.72	-3.52	-4.90	36.02	-40.92
			54	-1.22	9.17	30.00	-31.22	-20.83	-3.52	-4.74	36.02	-40.76

**Table 7-13. Conducted Output Power Measurements SISO ANT2 (106 Tones)**

Freq [MHz]	Channel	Tones	RU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
2412	1	242T	61	15.43	22.04	30.00	-14.57	-7.96	-3.52	11.91	36.02	-24.11
2417	2	242T	61	17.55	26.32	30.00	-12.45	-3.68	-3.52	14.03	36.02	-21.99
2437	6	242T	61	17.61	26.36	30.00	-12.39	-3.64	-3.52	14.09	36.02	-21.93
2457	10	242T	61	17.82	26.33	30.00	-12.18	-3.67	-3.52	14.30	36.02	-21.72
2462	11	242T	61	15.99	22.19	30.00	-14.01	-7.81	-3.52	12.47	36.02	-23.55
2467	12	242T	61	5.72	14.32	30.00	-24.28	-15.68	-3.52	2.20	36.02	-33.82
2472	13	242T	61	-0.37	10.11	30.00	-30.37	-19.89	-3.52	-3.89	36.02	-39.91

**Table 7-14. Conducted Output Power Measurements SISO ANT2 (242 Tones)**

Freq [MHz]	Channel	Tones	MRU Index	Avg Conducted Powers [dBm]	Peak Conducted Powers [dBm]	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
2437	6	52+26T	71	14.44	22.64	30.00	-15.56	-7.36	-3.52	10.92	36.02	-25.10

**Table 7-15. Conducted Output Power Measurements SISO ANT2 (52+26 Tones)**

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 24 of 74



Freq [MHz]	Channel	Tones	MRU Index	Avg Conducted Powers (dBm)	Peak Conducted Powers (dBm)	Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dB]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
2412	1	106+26T	82	16.49	24.52	30.00	-13.51	-5.48	-3.52	12.97	36.02	-23.05
			83	16.62	24.46	30.00	-13.38	-5.54	-3.52	13.10	36.02	-22.92
2462	11	106+26T	82	16.99	24.96	30.00	-13.01	-5.04	-3.52	13.47	36.02	-22.55
			83	16.99	24.96	30.00	-13.01	-5.04	-3.52	13.47	36.02	-22.55

**Table 7-16. Conducted Output Power Measurements SISO ANT2 (106+26 Tones)**

Freq [MHz]	Channel	Tones	RU Index	Conducted Power [dBm]						Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dB]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1		Antenna-2		MIMO								
				AVG	PEAK	AVG	PEAK	AVG	PEAK							
2412	1	26T	0	13.75	22.31	13.54	21.89	16.66	25.12	30.00	-13.34	-4.88	3.01	19.67	36.02	-16.35
			4	13.82	22.22	13.99	22.19	16.92	25.22	30.00	-13.08	-4.78	3.01	19.93	36.02	-16.09
			8	13.71	21.26	12.42	20.29	16.12	23.81	30.00	-13.88	-6.19	3.01	19.13	36.02	-16.89
			8	13.79	21.66	13.51	21.25	16.66	24.47	30.00	-13.34	-5.53	3.01	19.67	36.02	-16.35
2437	6	26T	4	13.75	21.49	13.55	21.03	16.56	24.28	30.00	-13.44	-5.72	3.01	19.58	36.02	-16.44
			8	13.73	21.57	13.81	21.32	16.78	24.46	30.00	-13.22	-5.54	3.01	19.79	36.02	-16.23
			0	13.80	21.38	13.37	20.91	16.60	24.16	30.00	-13.40	-5.84	3.01	19.61	36.02	-16.41
			4	13.67	21.97	13.47	21.55	16.58	24.78	30.00	-13.42	-5.22	3.01	19.59	36.02	-16.43
2462	11	26T	8	13.71	21.52	12.22	20.91	16.04	24.24	30.00	-13.96	-5.76	3.01	19.05	36.02	-16.97
			0	1.23	10.21	1.32	10.17	4.29	13.20	30.00	-25.71	-16.80	3.01	7.30	36.02	-28.72
			4	1.55	10.22	1.27	10.22	4.42	13.23	30.00	-25.58	-16.77	3.01	7.43	36.02	-28.59
			8	1.62	10.63	1.44	10.27	4.54	13.46	30.00	-25.46	-16.54	3.01	7.55	36.02	-28.47
2472	13	26T	0	-4.70	5.98	-4.63	5.82	-1.65	8.91	30.00	-31.65	-31.09	3.01	1.36	36.02	-34.66
			4	-4.62	5.44	-4.42	5.66	-1.51	8.56	30.00	-31.51	-31.44	3.01	1.50	36.02	-34.52
			8	-4.52	5.63	-4.32	5.42	-1.41	8.54	30.00	-31.41	-31.46	3.01	1.60	36.02	-34.42
			8	-4.52	5.63	-4.32	5.42	-1.41	8.54	30.00	-31.41	-31.46	3.01	1.60	36.02	-34.42

**Table 7-17. Conducted Output Power Measurements MIMO (26 Tones)**

Freq [MHz]	Channel	Tones	RU Index	Conducted Power [dBm]						Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dB]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1		Antenna-2		MIMO								
				AVG	PEAK	AVG	PEAK	AVG	PEAK							
2412	1	52T	37	14.16	21.89	14.99	22.25	17.61	25.08	30.00	-12.39	-4.92	3.01	20.62	36.02	-15.40
			38	13.89	21.39	14.95	22.09	17.46	24.76	30.00	-12.54	-5.24	3.01	20.47	36.02	-15.55
			40	14.70	22.47	14.42	22.11	17.57	25.30	30.00	-12.43	-4.70	3.01	20.58	36.02	-15.44
			37	14.80	22.80	14.51	22.62	17.67	25.72	30.00	-12.33	-4.28	3.01	20.68	36.02	-15.34
2437	6	52T	38	14.71	22.80	14.18	22.61	17.46	25.72	30.00	-12.54	-4.28	3.01	20.47	36.02	-15.55
			40	14.69	22.72	14.81	22.55	17.76	25.65	30.00	-12.24	-4.35	3.01	20.77	36.02	-15.25
			37	14.72	22.65	14.37	22.14	17.56	25.41	30.00	-12.44	-4.59	3.01	20.57	36.02	-15.45
			38	14.91	23.19	14.85	22.65	17.89	25.94	30.00	-12.11	-4.06	3.01	20.90	36.02	-15.12
2462	11	52T	40	14.99	23.13	13.83	22.73	17.46	25.94	30.00	-12.54	-4.06	3.01	20.47	36.02	-15.55
			37	2.22	11.24	2.32	11.32	5.28	14.29	30.00	-24.72	-15.71	3.01	8.29	36.02	-27.73
			38	2.42	11.24	2.11	11.42	5.28	14.34	30.00	-24.72	-15.66	3.01	8.29	36.02	-27.73
			40	2.33	11.63	2.52	11.44	5.44	14.35	30.00	-24.36	-15.45	3.01	8.45	36.02	-27.57
2472	13	52T	37	-3.63	6.89	-3.57	6.80	-0.59	9.86	30.00	-30.59	-20.14	3.01	2.42	36.02	-33.60
			38	-3.14	7.01	-3.22	7.12	-0.17	10.08	30.00	-30.17	-19.92	3.01	2.84	36.02	-33.18
			40	-3.45	7.11	-3.87	7.21	-0.64	10.17	30.00	-30.64	-19.83	3.01	2.37	36.02	-33.65
			40	-3.45	7.11	-3.87	7.21	-0.64	10.17	30.00	-30.64	-19.83	3.01	2.37	36.02	-33.65

**Table 7-18. Conducted Output Power Measurements MIMO (52 Tones)**

Freq [MHz]	Channel	Tones	RU Index	Conducted Power [dBm]						Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dB]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1		Antenna-2		MIMO								
				AVG	PEAK	AVG	PEAK	AVG	PEAK							
2412	1	106T	53	16.99	25.66	16.89	25.05	19.95	28.38	30.00	-10.05	-1.62	3.01	22.96	36.02	-13.06
			54	16.79	24.81	15.91	24.05	19.38	27.46	30.00	-10.62	-2.54	3.01	22.39	36.02	-13.63
			53	16.93	25.28	16.44	24.88	19.70	27.91	30.00	-10.30	-2.09	3.01	22.71	36.02	-13.31
			54	16.82	25.02	16.65	24.72	19.75	27.88	30.00	-10.25	-2.12	3.01	22.76	36.02	-13.26
2462	11	106T	53	16.64	24.79	16.48	24.37	19.57	27.60	30.00	-10.43	-2.40	3.01	22.58	36.02	-13.44
			54	16.57	24.49	15.60	24.12	19.12	27.32	30.00	-10.88	-2.68	3.01	22.13	36.02	-13.89
			53	4.21	13.32	4.42	13.27	7.33	16.31	30.00	-22.67	-13.69	3.01	10.34	36.02	-25.68
			54	4.41	13.47	4.37	13.82	7.43	16.51	30.00	-22.58	-13.49	3.01	10.43	36.02	-25.59
2472	13	106T	53	-1.52	9.21	-1.38	9.28	1.56	12.26	30.00	-28.44	-17.74	3.01	4.57	36.02	-31.45
			54	-1.40	9.11	-1.22	9.17	1.70	12.15	30.00	-28.30	-17.85	3.01	4.71	36.02	-31.31
			54	-1.40	9.11	-1.22	9.17	1.70	12.15	30.00	-28.30	-17.85	3.01	4.71	36.02	-31.31
			54	-1.40	9.11	-1.22	9.17	1.70	12.15	30.00	-28.30	-17.85	3.01	4.71	36.02	-31.31

**Table 7-19. Conducted Output Power Measurements MIMO (106 Tones)**

Freq [MHz]	Channel	Tones	RU Index	Conducted Power [dBm]						Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dB]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1		Antenna-2		MIMO								
				AVG	PEAK	AVG	PEAK	AVG	PEAK							
1	1	242T	61	15.81	25.33	15.22	26.08	18.54	28.73	30.00	-11.46	-1.27	3.01	21.55	36.02	-14.47
1	2	242T	61	17.66	26.55	17.25	25.99	20.47	29.29	30.00	-9.53	-0.71	3.01	23.48	36.02	-12.54
7	6	242T	61	17.59	26.49	17.24	25.98	20.43	29.25	30.00	-9.57	-0.75	3.01	23.44	36.02	-12.58
7	10	242T	61	17.52	26.52	17.33	25.78	20.44	29.18	30.00	-9.56	-0.82	3.01	23.45	36.02	-12.57
7	11	242T	61	15.55	23.55	15.03	22.66	18.31	26.14	30.00	-11.69	-3.86	3.01	21.32	36.02	-14.70
7	12	242T	61	5.69	14.22	5.72	14.32	8.72	17.28	30.00	-21.28	-12.72	3.01	11.73	36.02	-24.29
1	13	242T	61	-0.52	10.21	-0.37	10.11	2.57	13.17	30.00	-27.43	-16.83	3.01	5.58	36.02	-30.44

**Table 7-20. Conducted Output Power Measurements MIMO (242 Tones)**

Freq [MHz]	Channel	Tones	MRU Index	Conducted Power [dBm]						Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dB]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1		Antenna-2		MIMO								
				AVG	PEAK	AVG	PEAK	AVG	PEAK							
2437	6	52+26T	71	14.56	22.62	14.01	22.16	17.30	25.41	30.00	-12.70	-4.59	0.81	18.12	36.02	-17.90

**Table 7-21. Conducted Output Power Measurements MIMO (52+26 Tones)**

Freq [MHz]	Channel	Tones	MRU Index	Conducted Power [dBm]						Conducted Power Limit [dBm]	Avg Conducted Power Margin [dB]	Peak Conducted Power Margin [dB]	Ant. Gain [dB]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
				Antenna-1		Antenna-2		MIMO								
				AVG	PEAK	AVG	PEAK	AVG	PEAK							
2412	1	106+26T	82	16.74	25.33	16.31	23.75	19.54	28.06	30.00	-10.46	-1.94	0.81	20.35	36.02	-15.67
			83	16.80	25.16	15.65	23.87	19.27	27.57	30.00	-10.73	-2.43	0.81	20.09	36.02	-15.93
2462	11	106+26T	82	16.97	25.31	15.75	24.04	19.41	27.73	30.00	-10.59	-2.27	0.81	20.23	36.02	-15.79
			83	16.98	25.35	15.96	24.22	19.51	27.83	30.00	-10.49	-2.17	0.81			



**Note:**

Per ANSI C63.10-2013 Section 14.2, the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

**Sample MIMO Calculation:**

At 2412MHz the average conducted output power was measured to be 13.75 dBm for Antenna 1 and 13.54 dBm for Antenna 2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(13.75 \text{ dBm} + 13.54 \text{ dBm}) = (23.71 \text{ mW} + 22.59 \text{ mW}) = 46.30 \text{ mW} = 16.66 \text{ dBm}$$

<b>FCC ID:</b> A3LSMS928JPN	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2312110124-07.A3L	<b>Test Dates:</b> 9/6/2023 - 11/06/2023	<b>EUT Type:</b> Portable Handset	Page 26 of 74

## 7.4 Power Spectral Density

### Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, tones configurations, and RU indices were investigated and the worst-case configuration results are reported in this section.

***The maximum permissible power spectral density shall not be greater than 8 dBm in any 3 kHz band.***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD  
ANSI C63.10-2013 – Section 14.3.1 Measure-and-Sum Technique

### Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-3. Test Instrument & Measurement Setup**

### Test Notes

1. Based on preliminary measurements, it was determined that, of all of the tone configurations, the 26T configuration produced the worst case power spectral density measurement for partial loaded case. Therefore, only the 26 Tone configuration and 242 Tone data is included in this section.
2. The power spectral density for each channel was measured with the RU index showing the highest conducted power.

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 27 of 74




## Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	ANT 1 Power Spectral Density [dBm]	ANT 2 Power Spectral Density [dBm]	Summed MIMO Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	ax	26T	MCS0	-4.12	-3.64	-0.86	8.00	-8.86	Pass
2437	6	ax	26T	MCS0	-4.19	-10.61	-3.30	8.00	-11.30	Pass
2462	11	ax	26T	MCS0	-3.33	-3.47	-0.39	8.00	-8.39	Pass
2412	1	ax	242T	MCS0	-8.71	-10.16	-6.36	8.00	-14.36	Pass
2437	6	ax	242T	MCS0	-9.53	-9.42	-6.46	8.00	-14.46	Pass
2462	11	ax	242T	MCS0	-8.95	-8.88	-5.91	8.00	-13.91	Pass


**Table 7-23. Conducted Power Spectral Density Measurements MIMO**

<b>FCC ID:</b> A3LSMS928JPN	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2312110124-07.A3L	<b>Test Dates:</b> 9/6/2023 - 11/06/2023	<b>EUT Type:</b> Portable Handset	Page 28 of 74

## 7.4.1 MIMO Power Spectral Density Measurements

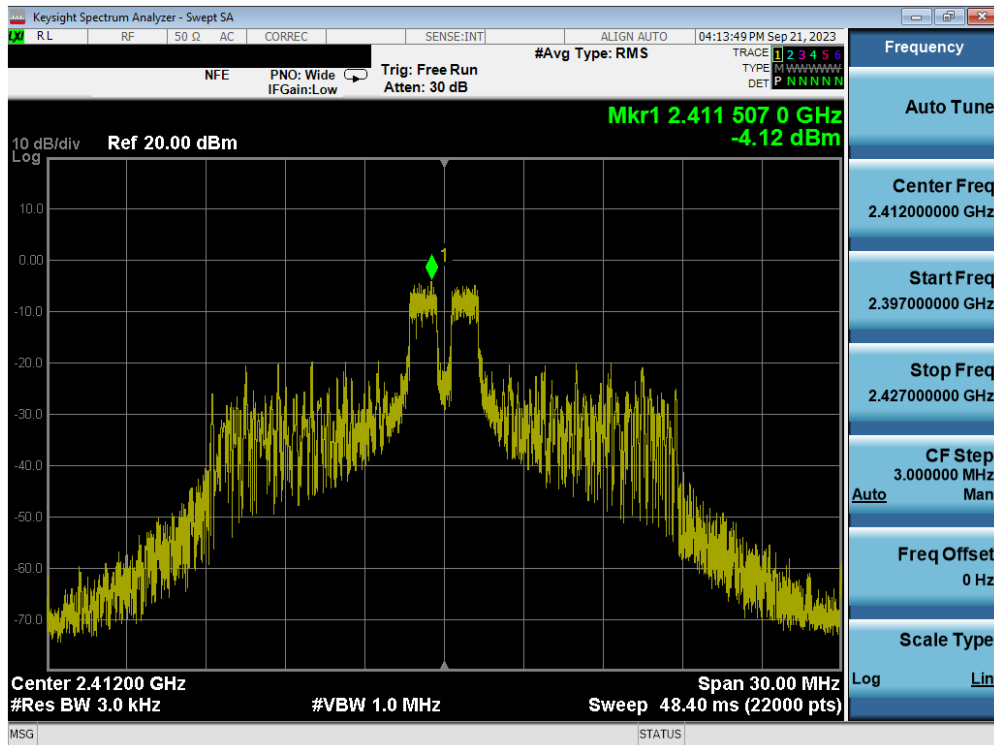


Plot 7-13. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 1)

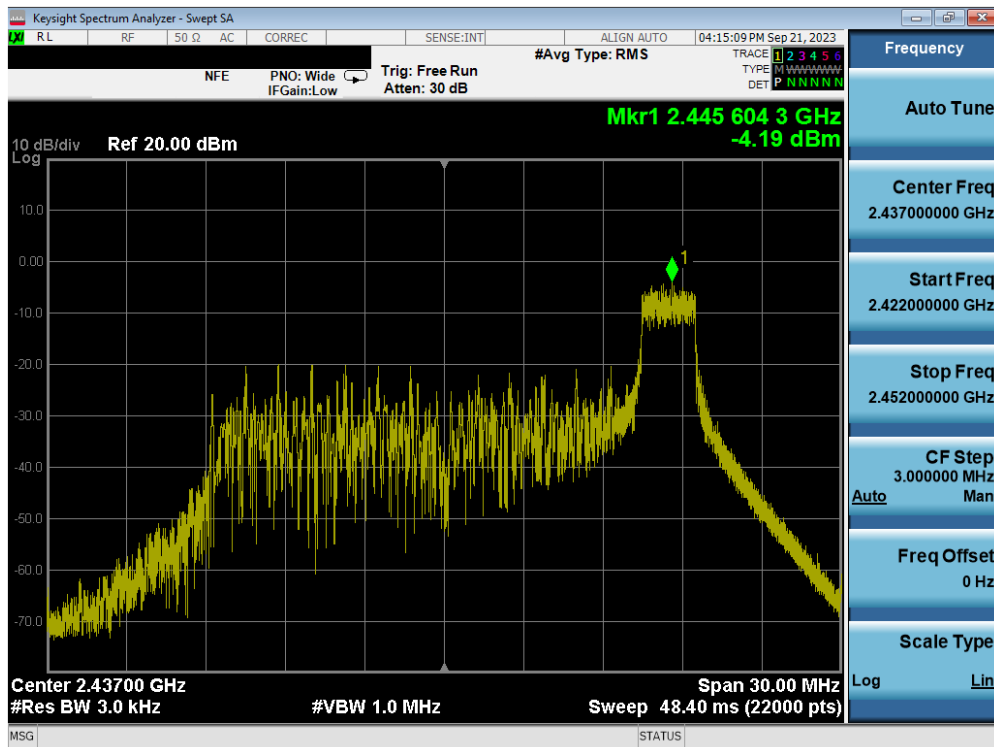


Plot 7-14. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 6)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 29 of 74

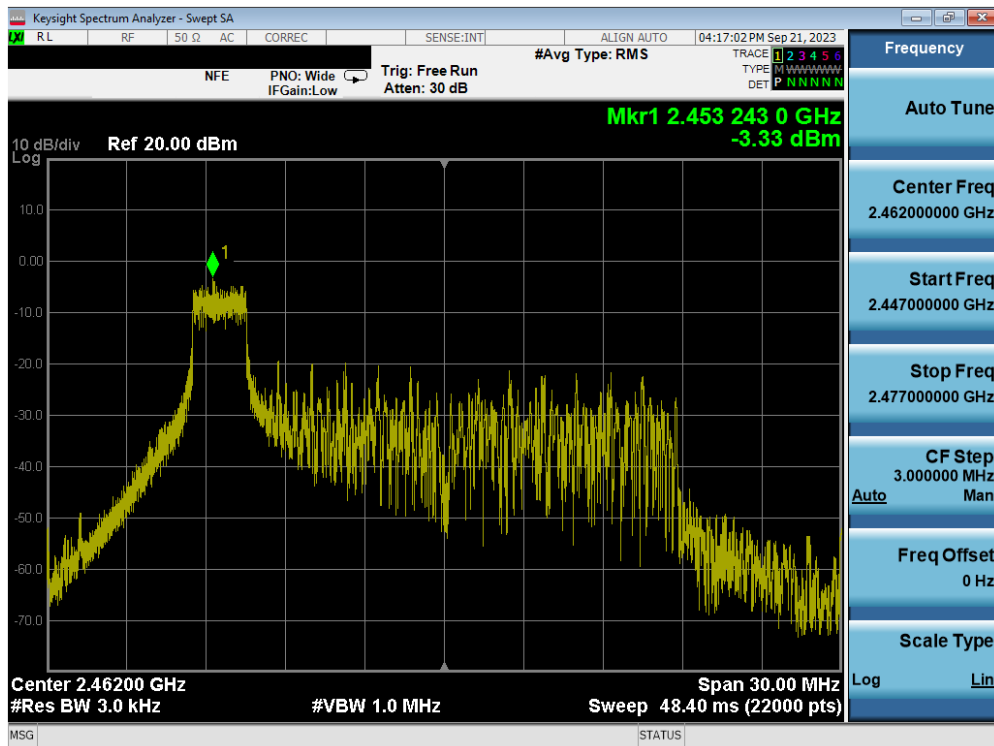


Plot 7-15. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 11)

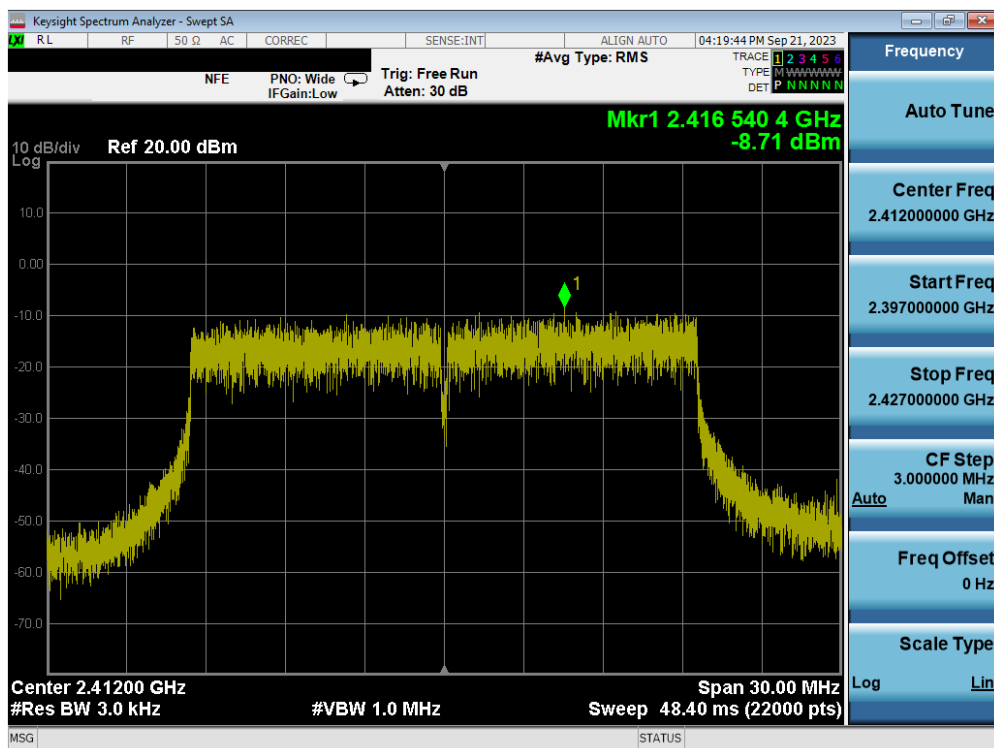


Plot 7-16. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 1)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 30 of 74

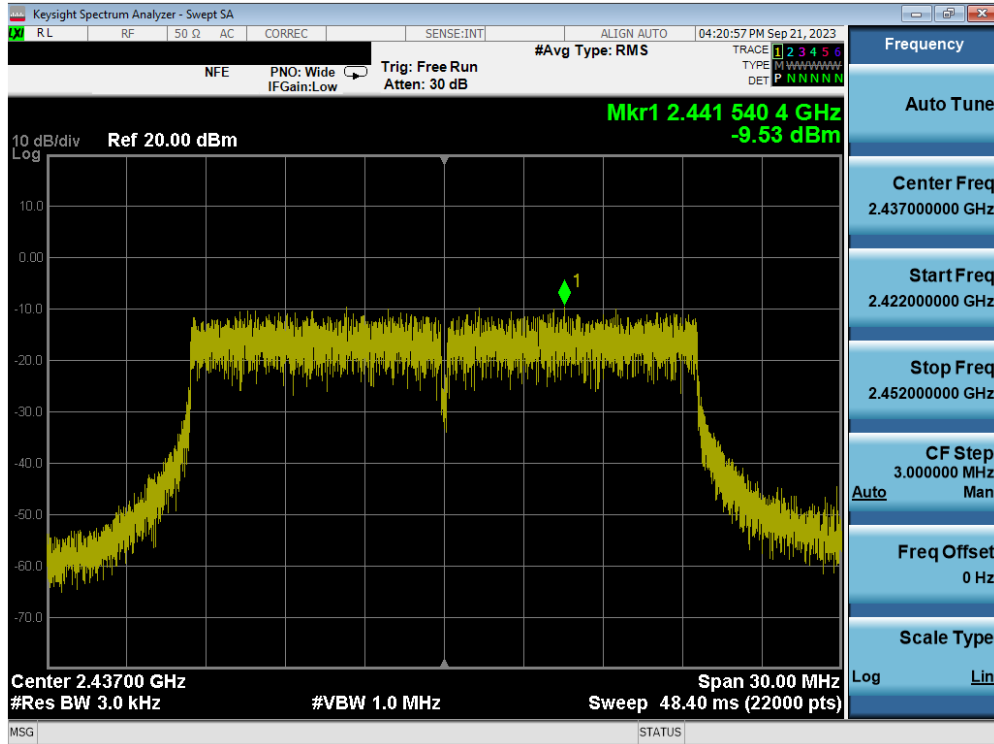


Plot 7-17. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 6)

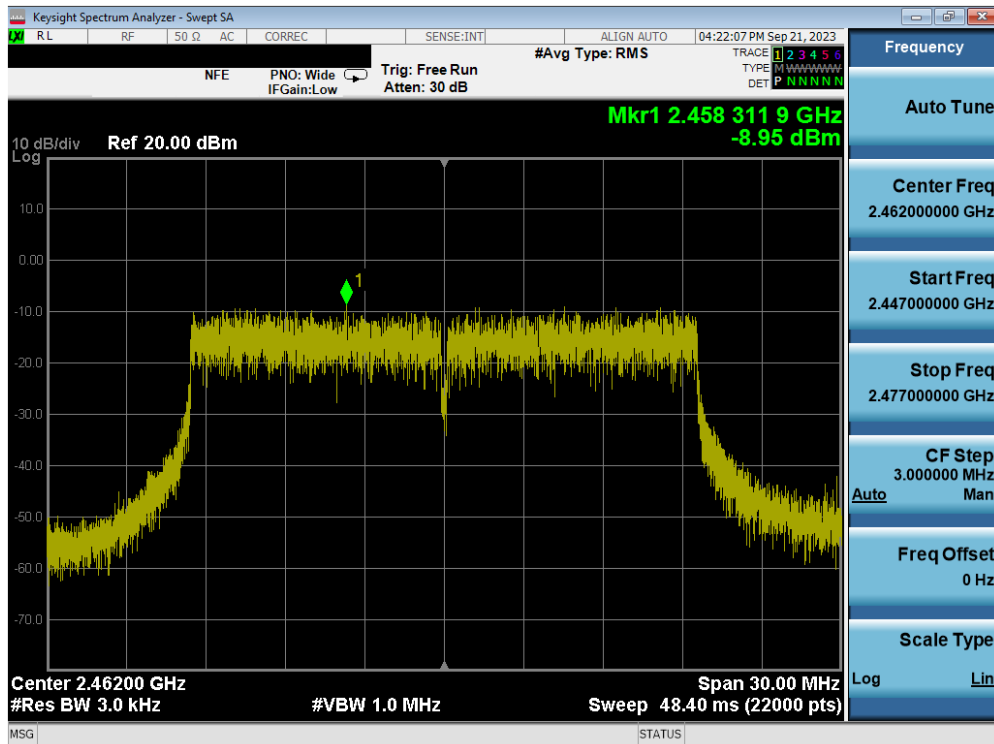


Plot 7-18. Power Spectral Density Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 31 of 74

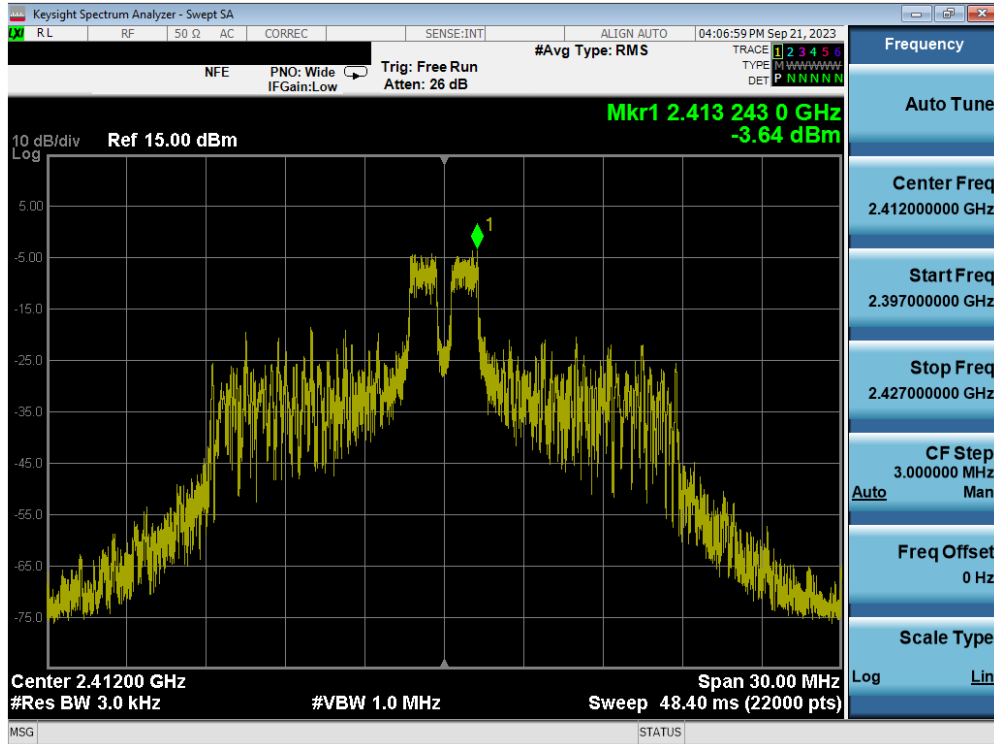


Plot 7-19. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 1)

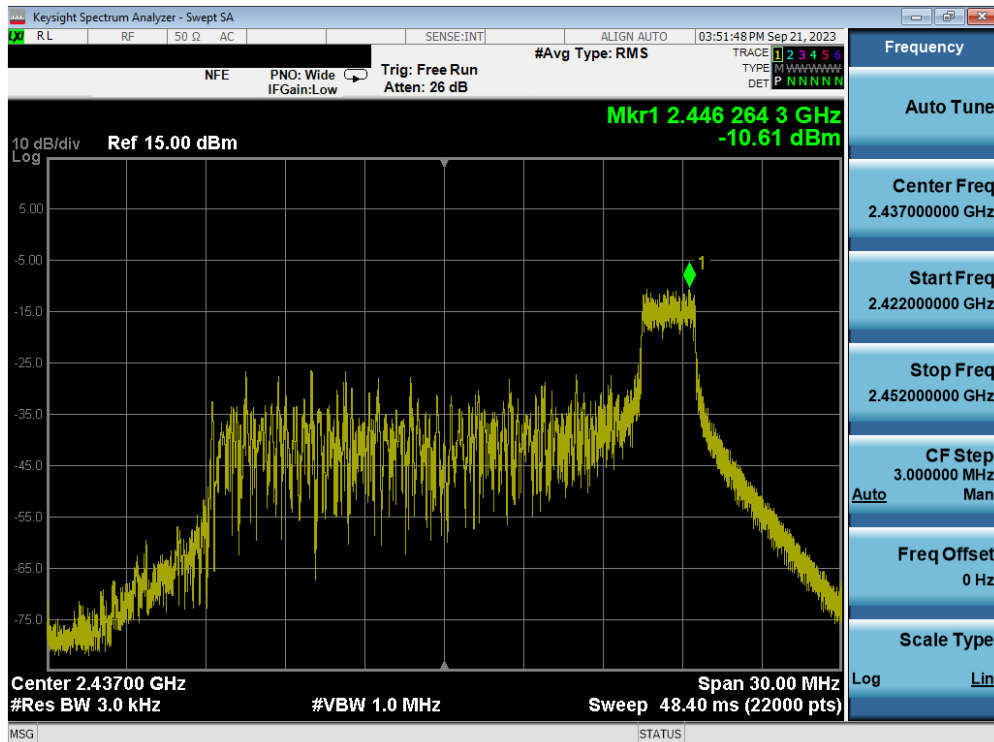


Plot 7-20. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 6)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 32 of 74



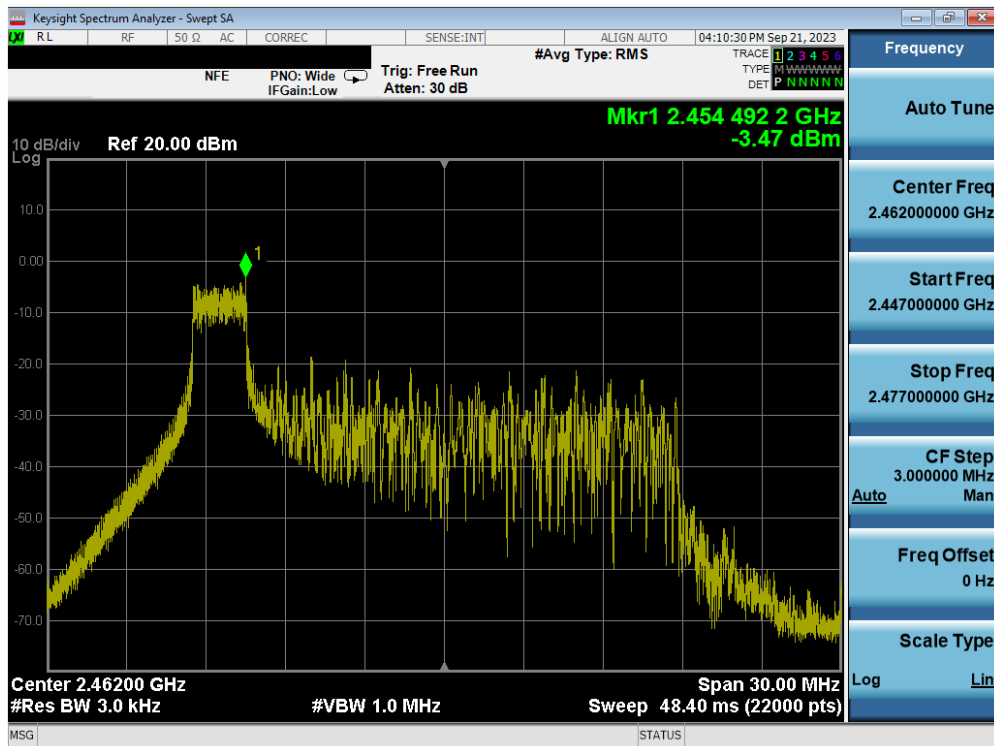


Plot 7-21. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 11)

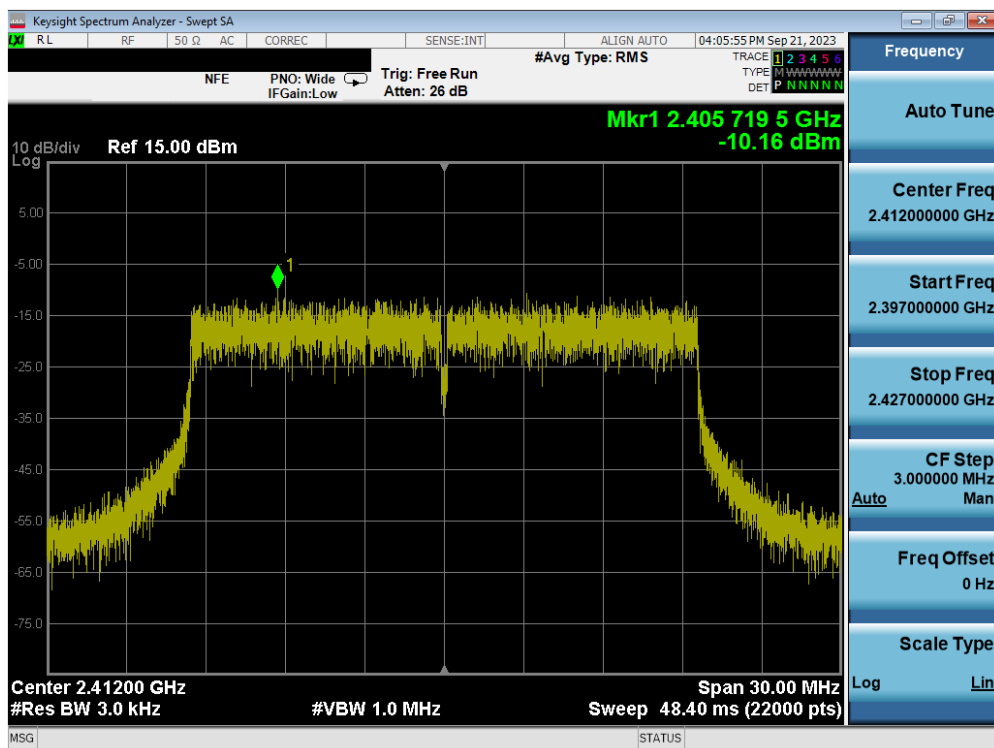


Plot 7-22. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 1)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 33 of 74

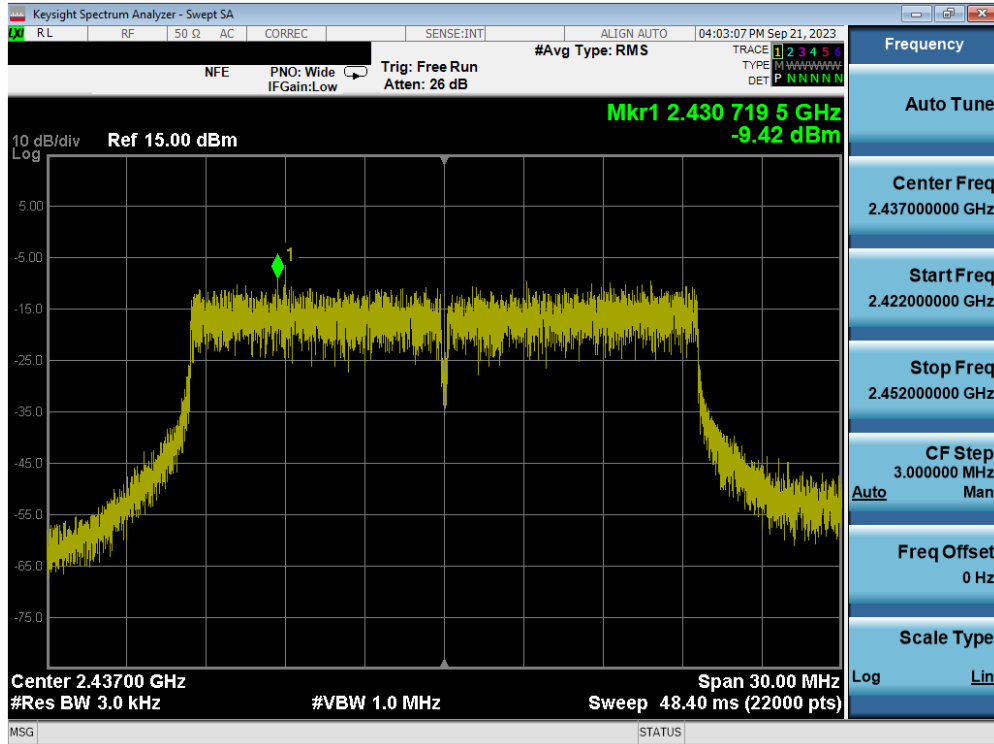

Plot 7-23. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 6)

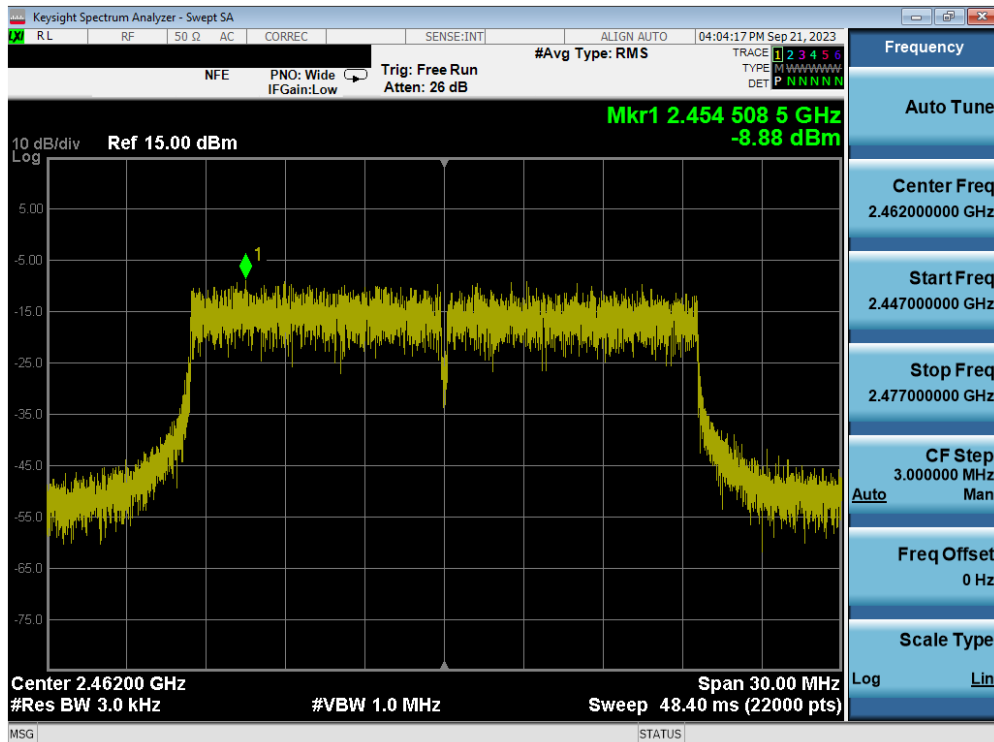

Plot 7-24. Power Spectral Density Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 11)

**Note:**

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 34 of 74



Per ANSI C63.10-2013 Section 14.3.1, the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

**Sample MIMO Calculation:**

At 2412MHz the average conducted power spectral density was measured to be -4.12 dBm for Antenna 1 and -3.64 dBm for Antenna 2.

Antenna 1 + Antenna 2 = MIMO

$$(-4.12 \text{ dBm} + -3.64 \text{ dBm}) = (0.39 \text{ mW} + 0.43 \text{ mW}) = 0.82 \text{ mW} = -0.86 \text{ dBm}$$

<b>FCC ID:</b> A3LSMS928JPN	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2312110124-07.A3L	<b>Test Dates:</b> 9/6/2023 - 11/06/2023	<b>EUT Type:</b> Portable Handset	Page 35 of 74

## 7.5 Conducted Band Edge Emissions

### Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, tone configurations, and RU indices were investigated to determine the worst-case configuration. For the following out of band conducted emissions plots at the band edge, the EUT was set to a data rate of MCS0 in 802.11ax mode as this setting produced the worst-case emissions.

***The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-4. Test Instrument & Measurement Setup**

### Test Notes


None.

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 36 of 74

## 7.5.1 MIMO Conducted Band Edge Emissions

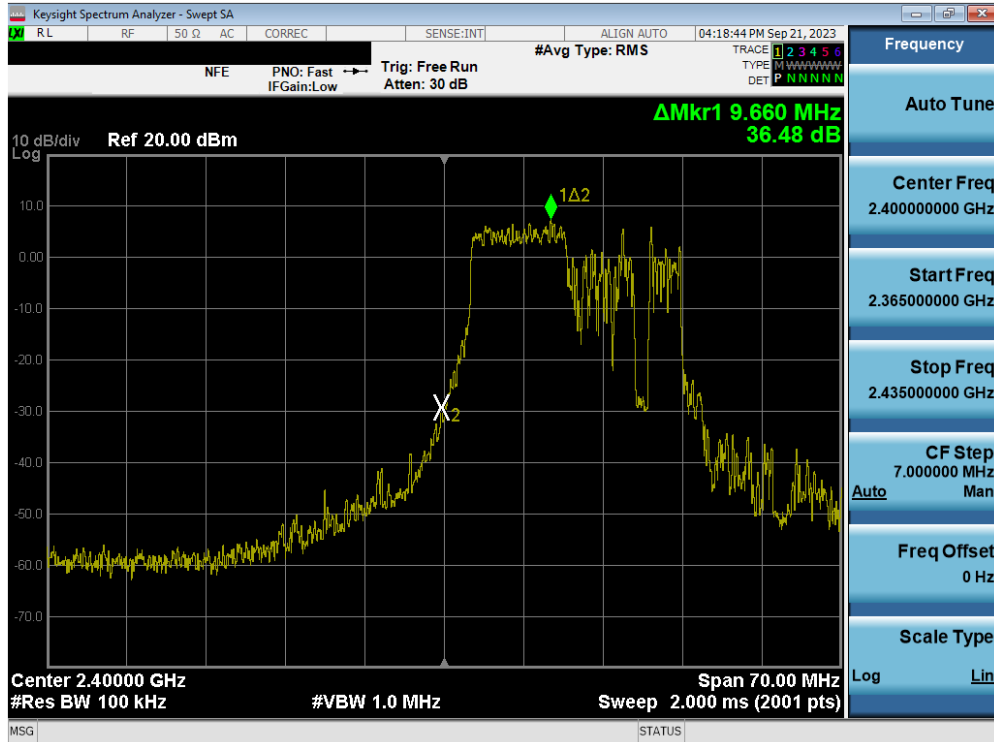


Plot 7-25. Band Edge Plot MIMO ANT1 (802.11ax OFDMA – 106 Tones – Ch. 1)

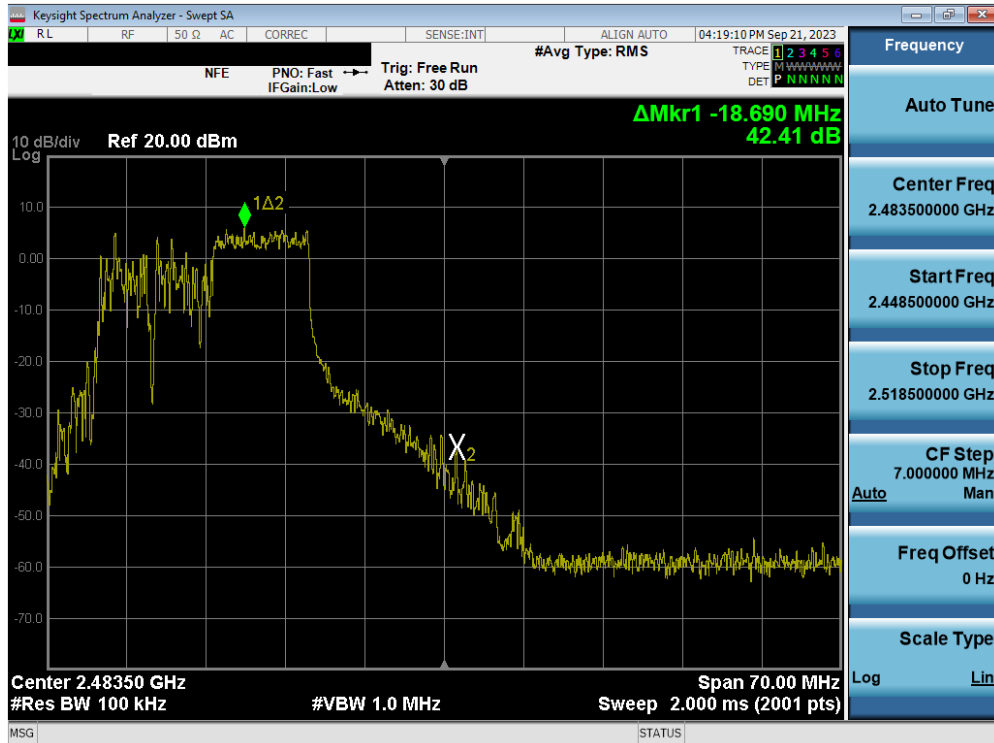


Plot 7-26. Band Edge Plot MIMO ANT1 (802.11ax OFDMA – 106 Tones – Ch. 11)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 37 of 74

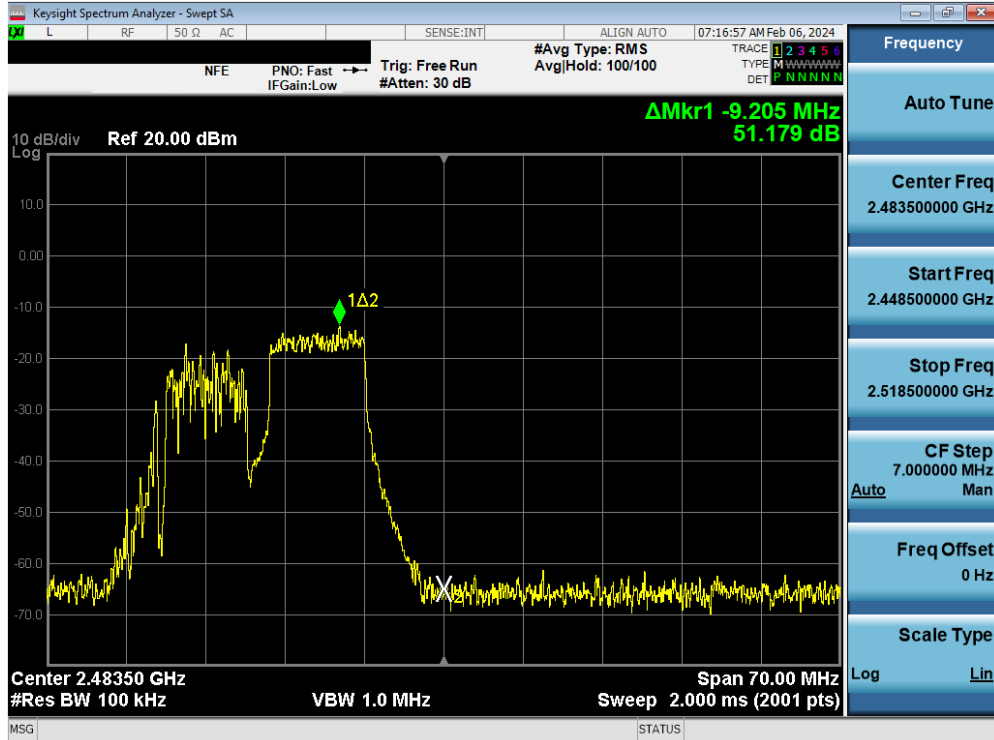


Plot 7-27. Band Edge Plot MIMO ANT1 (802.11ax OFDMA – 106 Tones – Ch. 12)

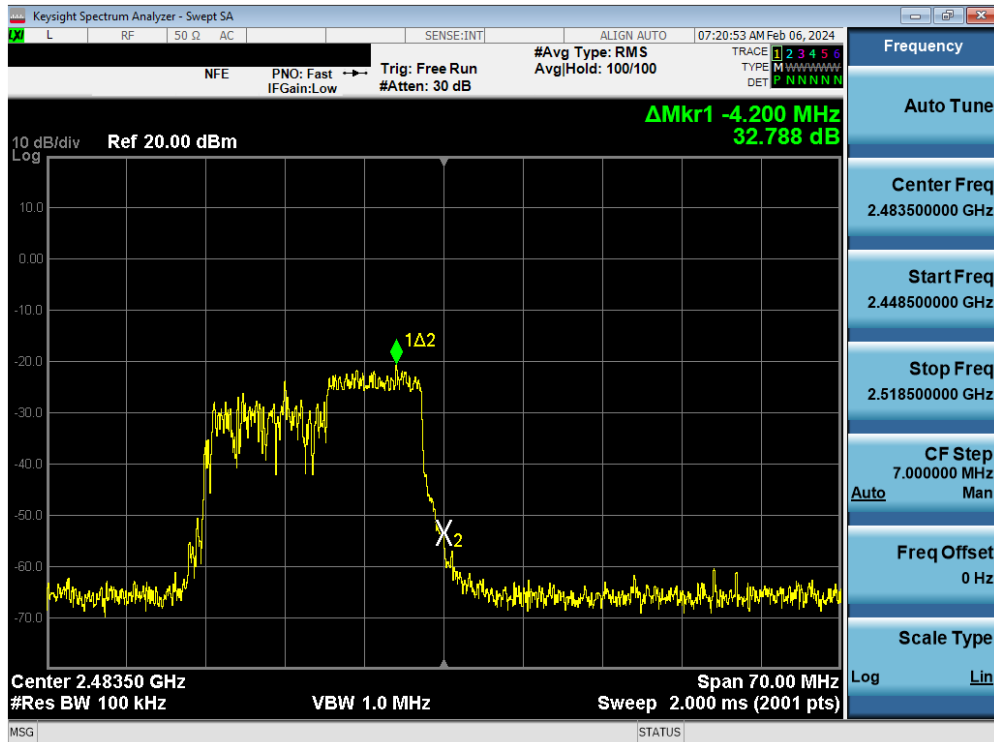


Plot 7-28. Band Edge Plot MIMO ANT1 (802.11ax OFDMA – 106 Tones – Ch. 13)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 38 of 74

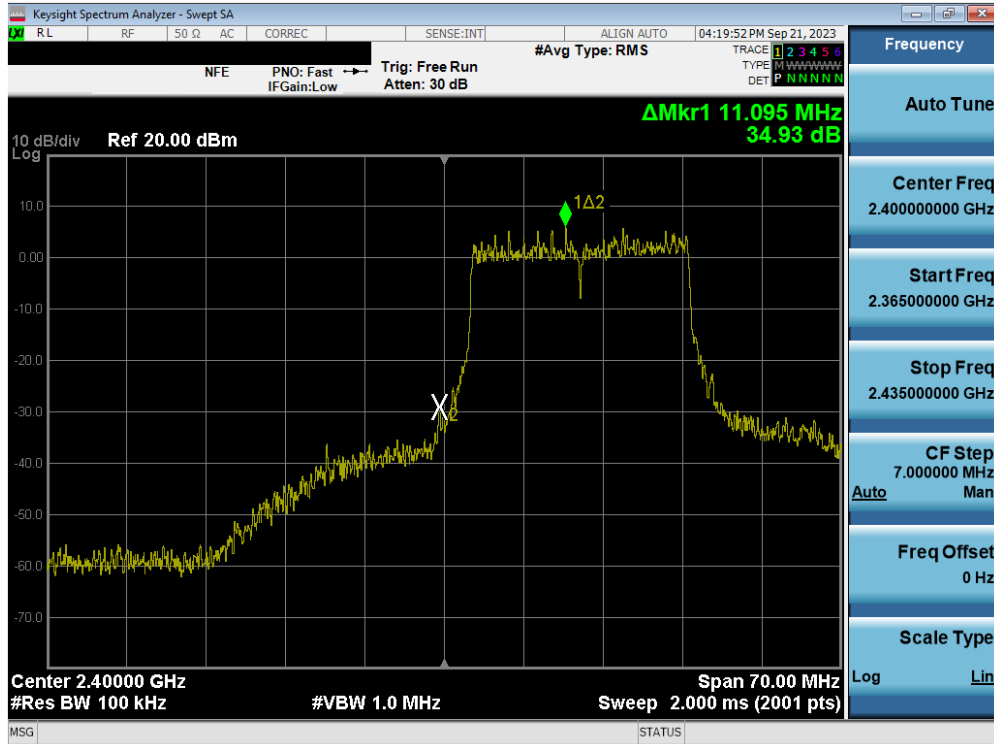


Plot 7-29. Band Edge Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 1)

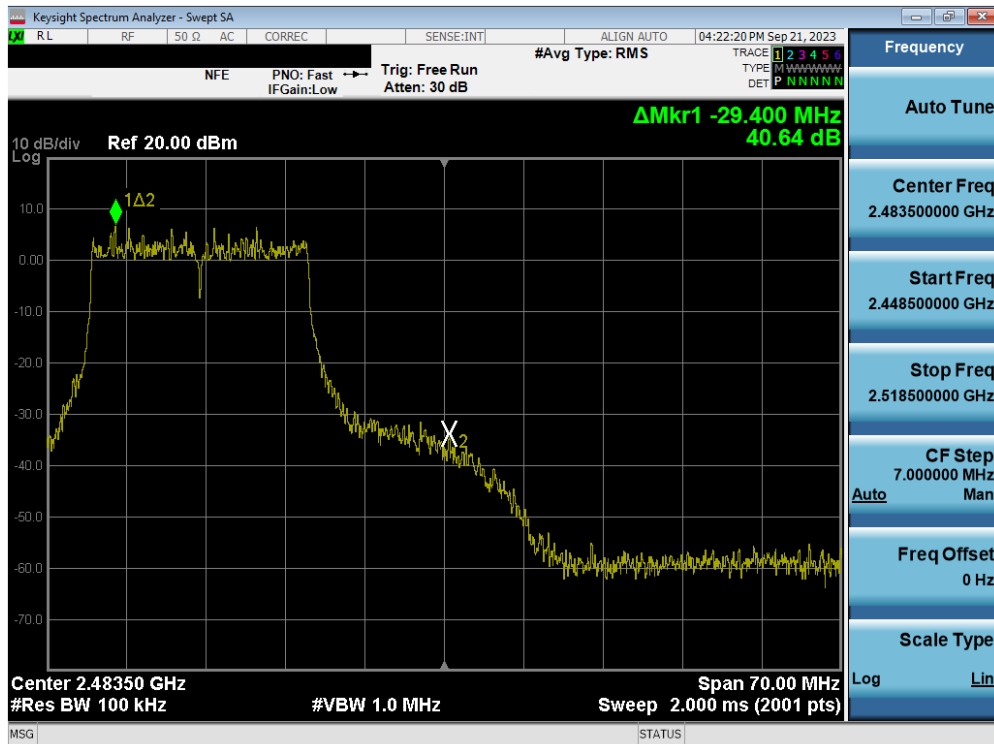


Plot 7-30. Band Edge Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 39 of 74

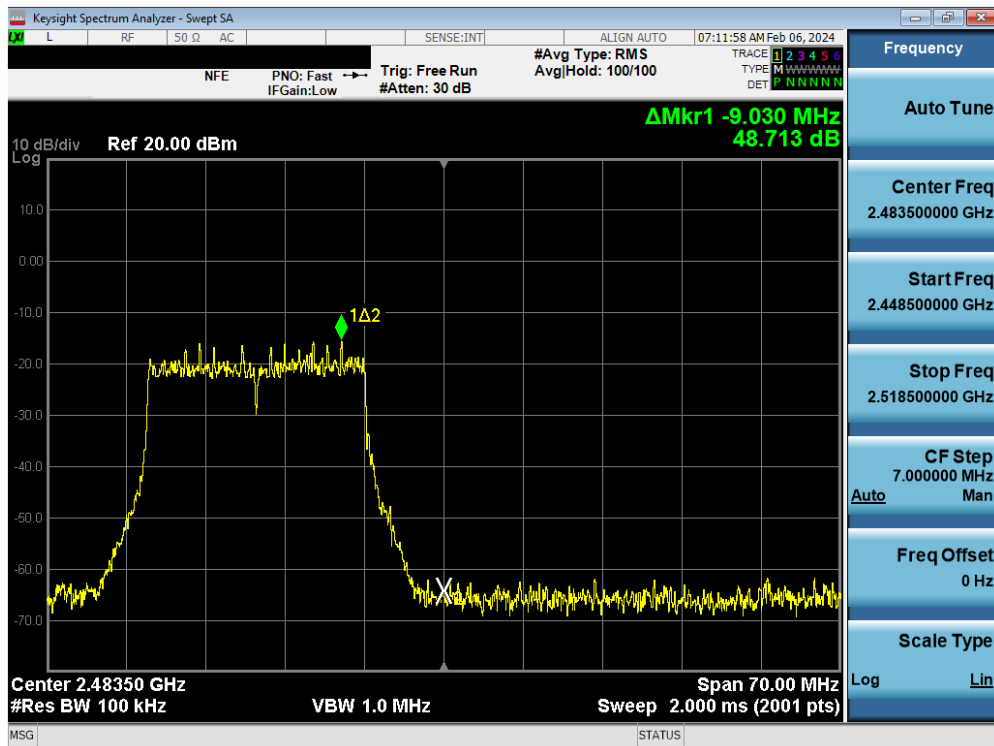


Plot 7-31. Band Edge Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 12)

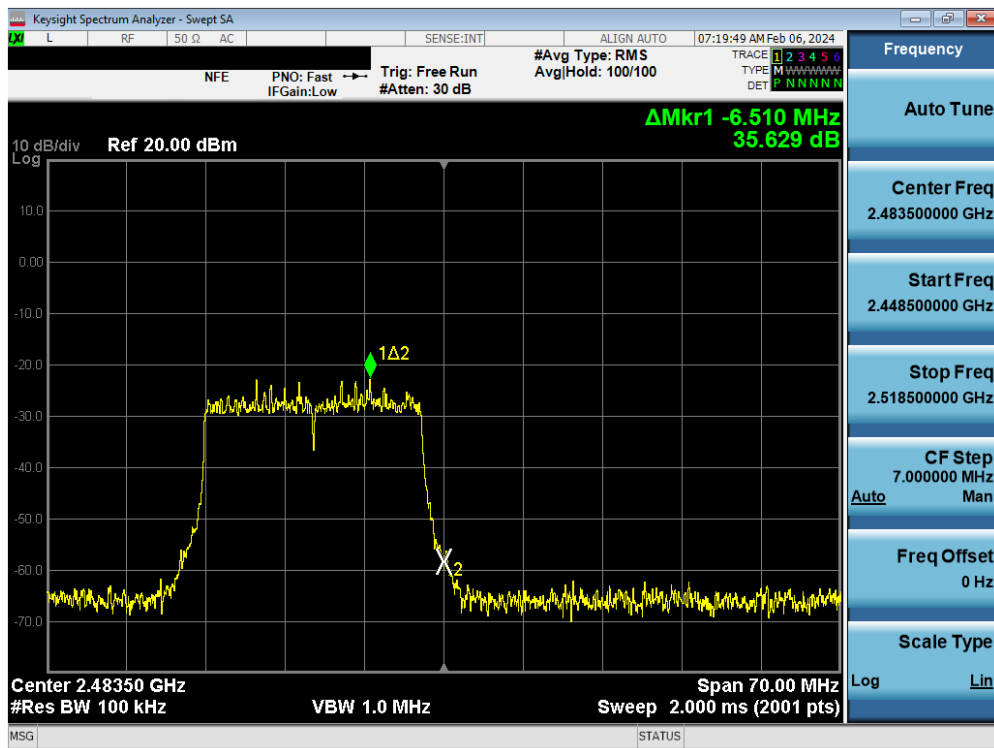


Plot 7-32. Band Edge Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 13)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 40 of 74



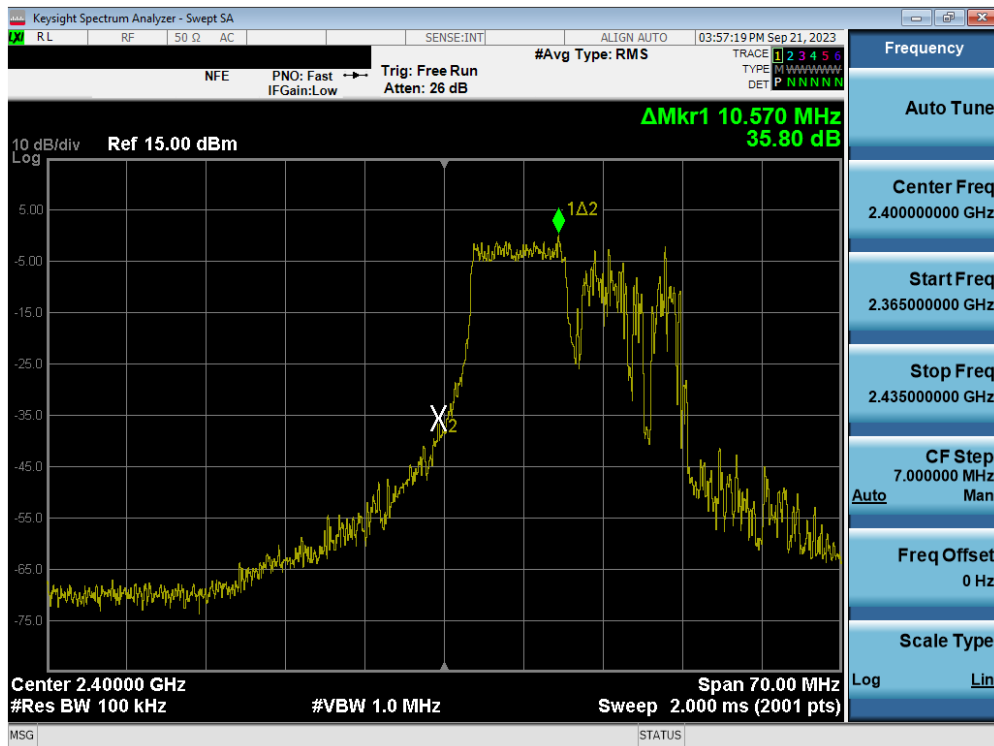


Plot 7-33. Band Edge Plot MIMO ANT2 (802.11ax OFDMA – 106 Tones – Ch. 1)

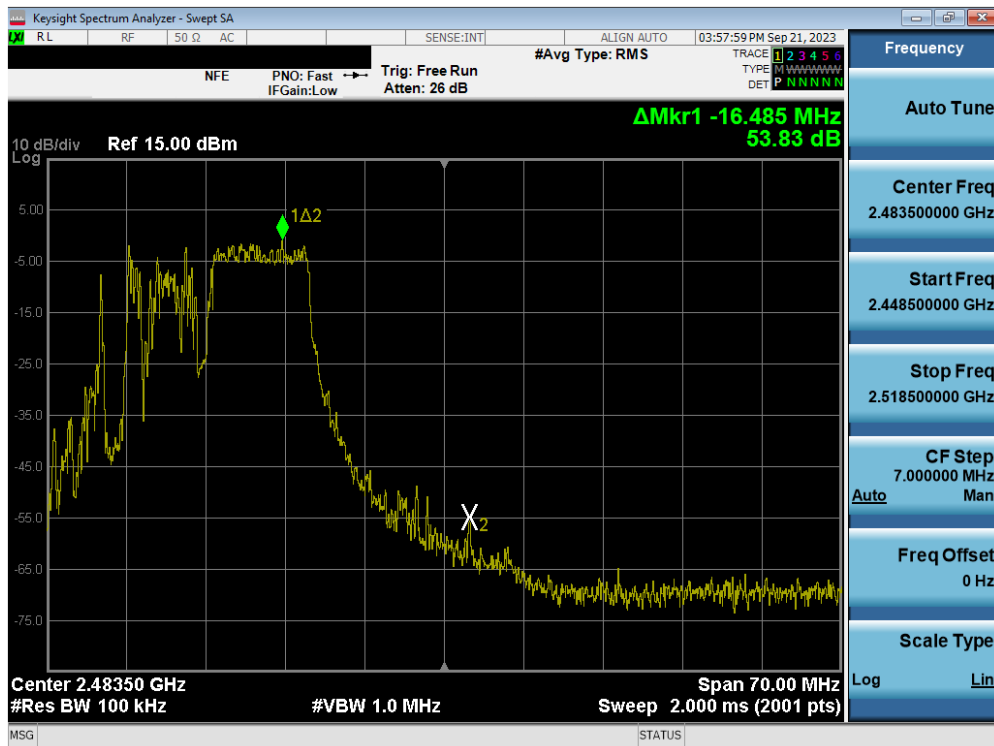


Plot 7-34. Band Edge Plot MIMO ANT2 (802.11ax OFDMA – 106 Tones – Ch. 11)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 41 of 74

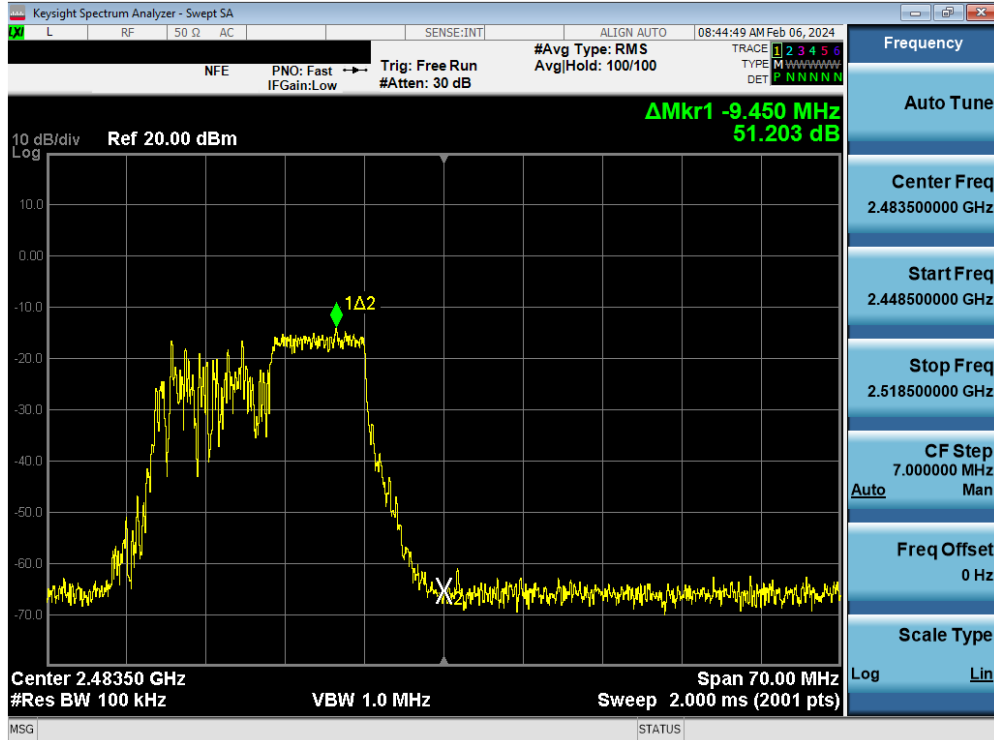


Plot 7-35. Band Edge Plot MIMO ANT2 (802.11ax OFDMA – 106 Tones – Ch. 12)

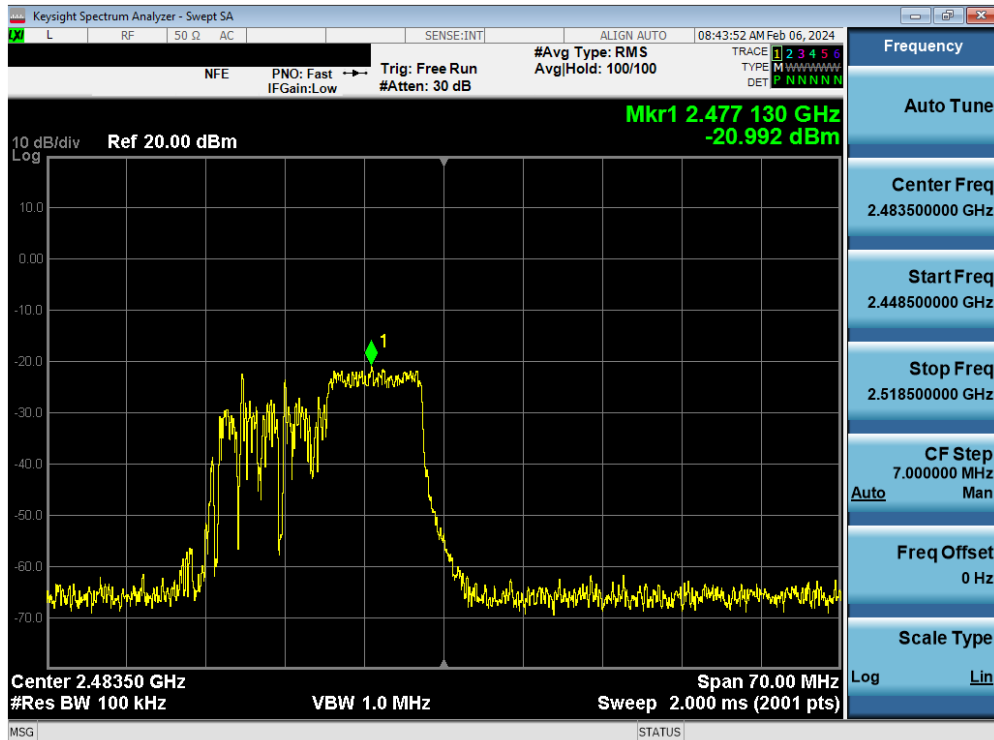


Plot 7-36. Band Edge Plot MIMO ANT2 (802.11ax OFDMA – 106 Tones – Ch. 13)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 42 of 74

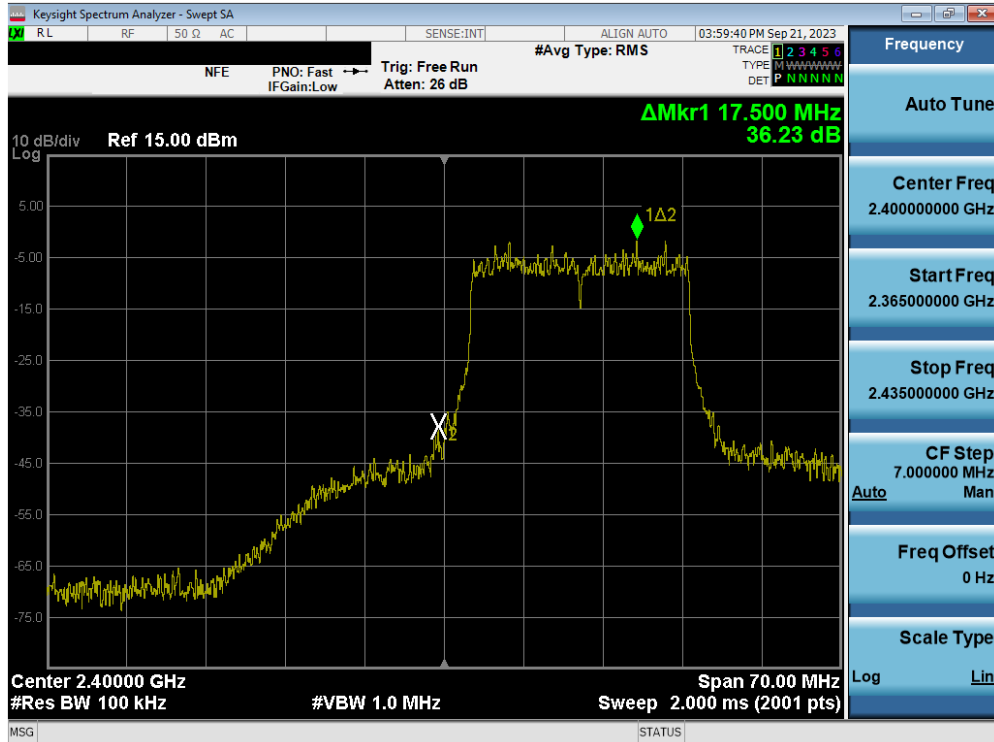


Plot 7-37. Band Edge Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 1)

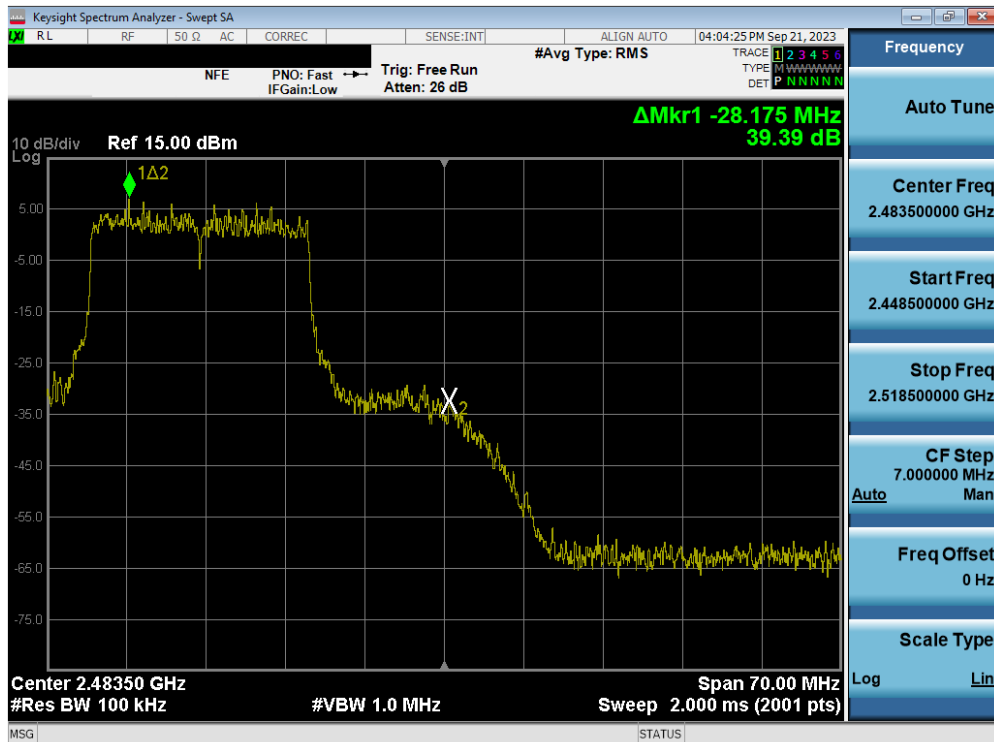


Plot 7-38. Band Edge Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 43 of 74

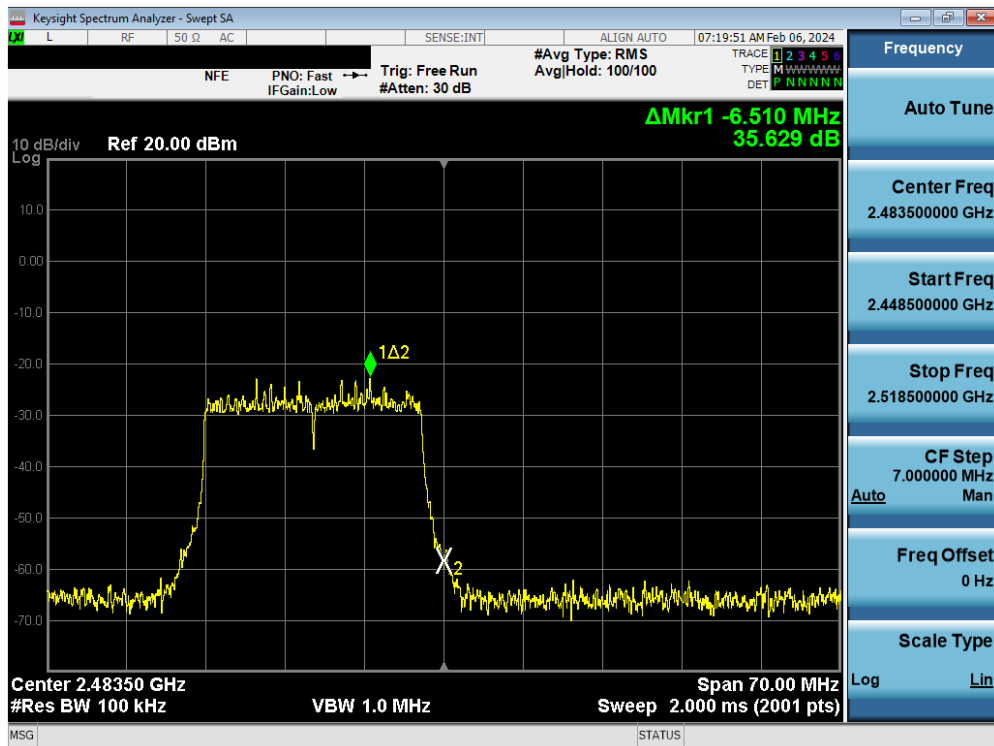

Plot 7-39. Band Edge Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 12)

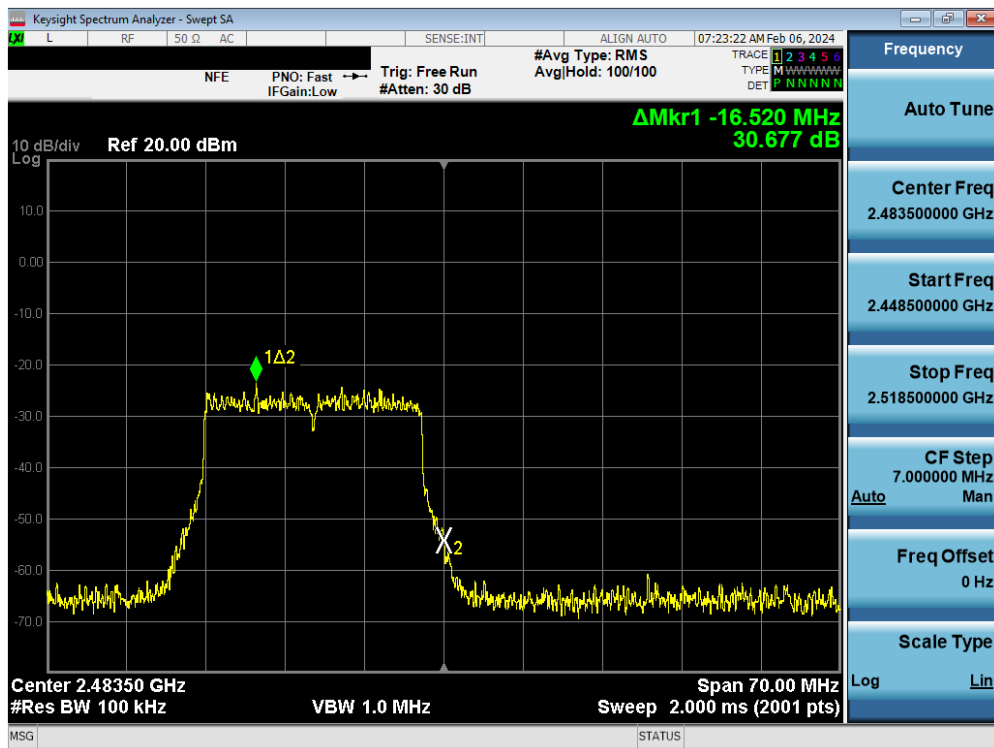

Plot 7-40. Band Edge Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 13)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 44 of 74

## 7.6 Conducted Spurious Emissions

### Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates, tone configurations, and RU indices were investigated to determine the worst-case configuration. For the following out of band conducted emissions plots, the EUT was set to a data rate of MCS0 in 802.11ax mode as this setting produced the worst-case emissions.

***The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.11.3 of ANSI C63.10-2013.***

### Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3  
ANSI C63.10-2013 – Section 14.3.3

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-5. Test Instrument & Measurement Setup**


FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 45 of 74

**Test Notes**


1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 30dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.
4. The conducted spurious emissions were measured to relative limits. Therefore, in accordance with ANSI C63.10-2013 Section 14.3.3, it was unnecessary to show compliance through the summation of test results of the individual outputs.

<b>FCC ID:</b> A3LSMS928JPN	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2312110124-07.A3L	<b>Test Dates:</b> 9/6/2023 - 11/06/2023	<b>EUT Type:</b> Portable Handset	Page 46 of 74

## 7.6.1 MIMO Conducted Spurious Emissions

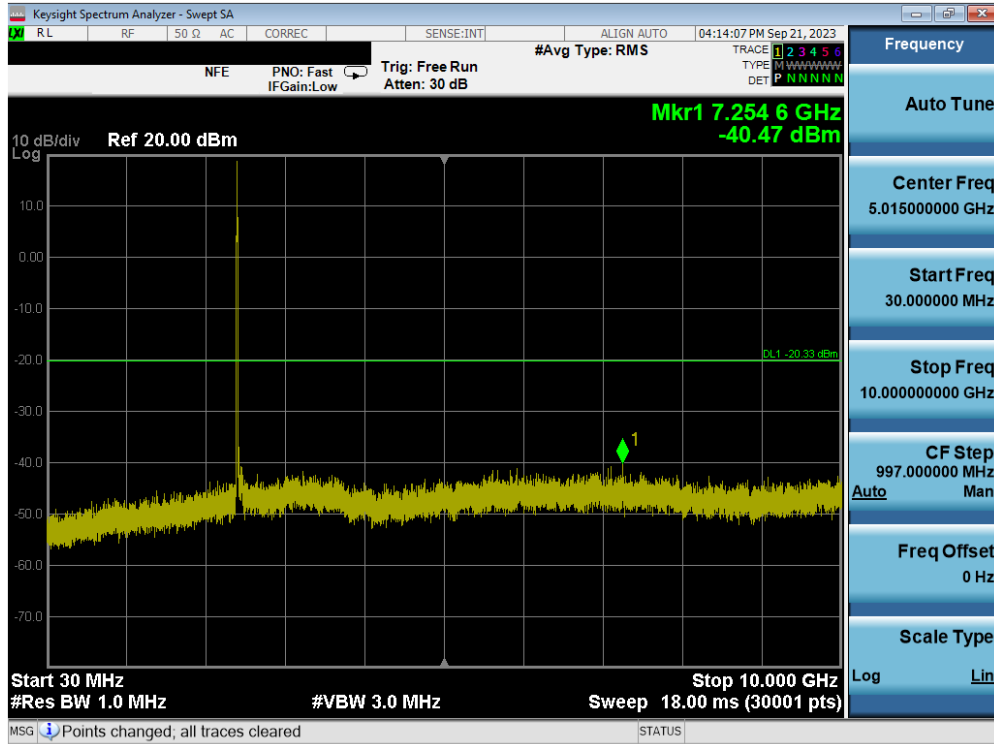


Plot 7-41. Conducted Spurious Plot MIMO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 1)

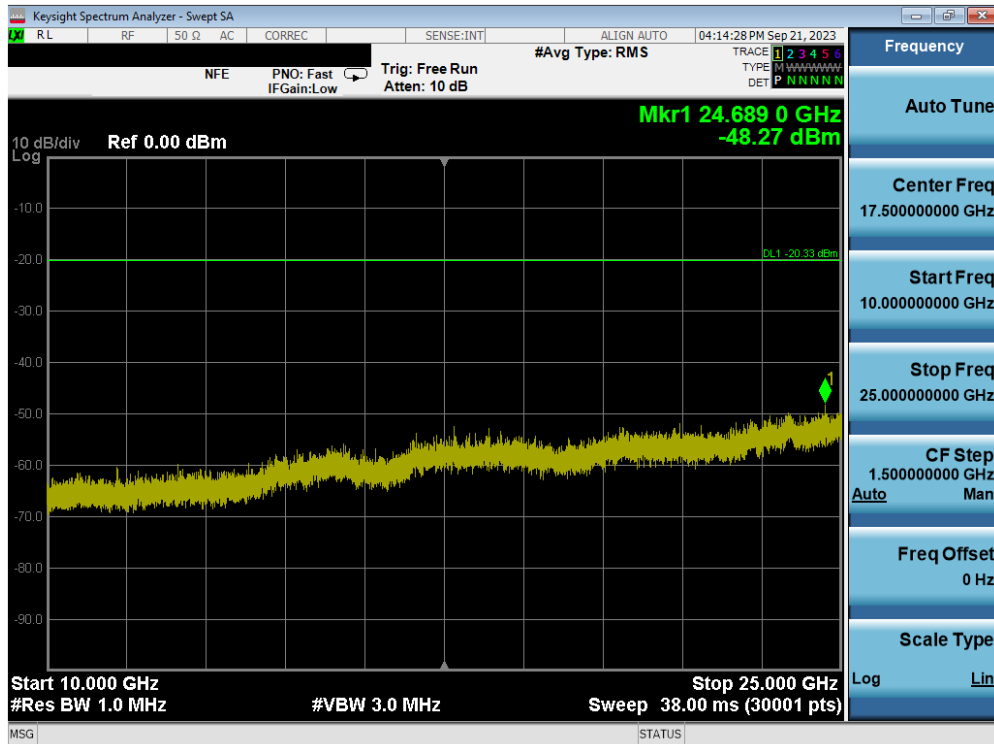


Plot 7-42. Conducted Spurious Plot MIMO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 1)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 47 of 74

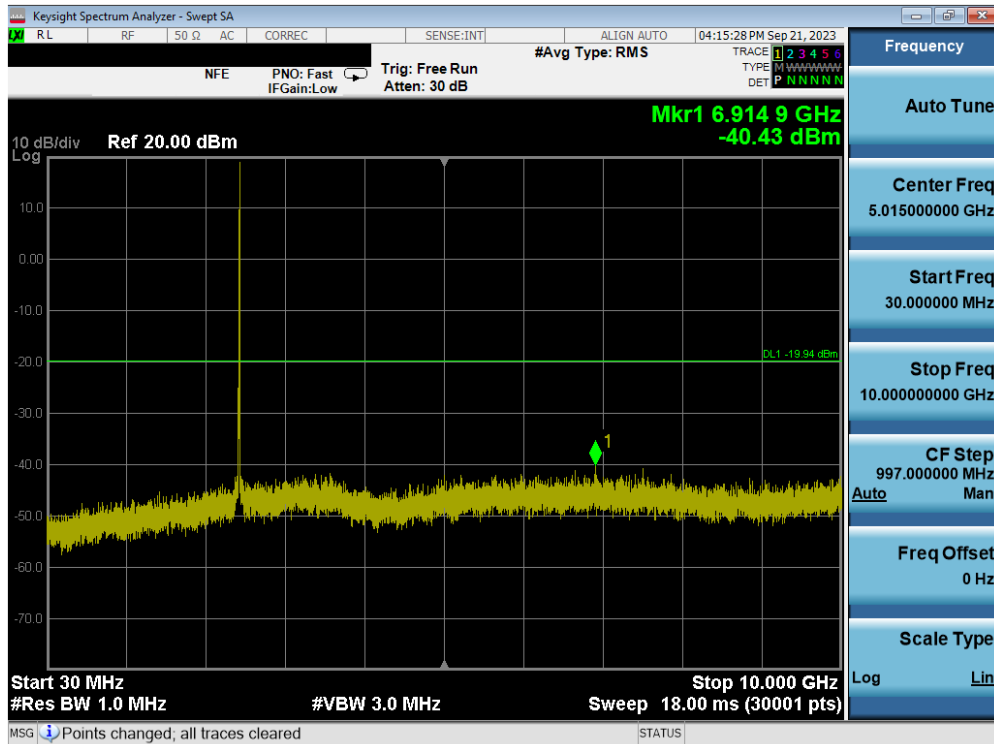


Plot 7-43. Conducted Spurious Plot MIMO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 6)

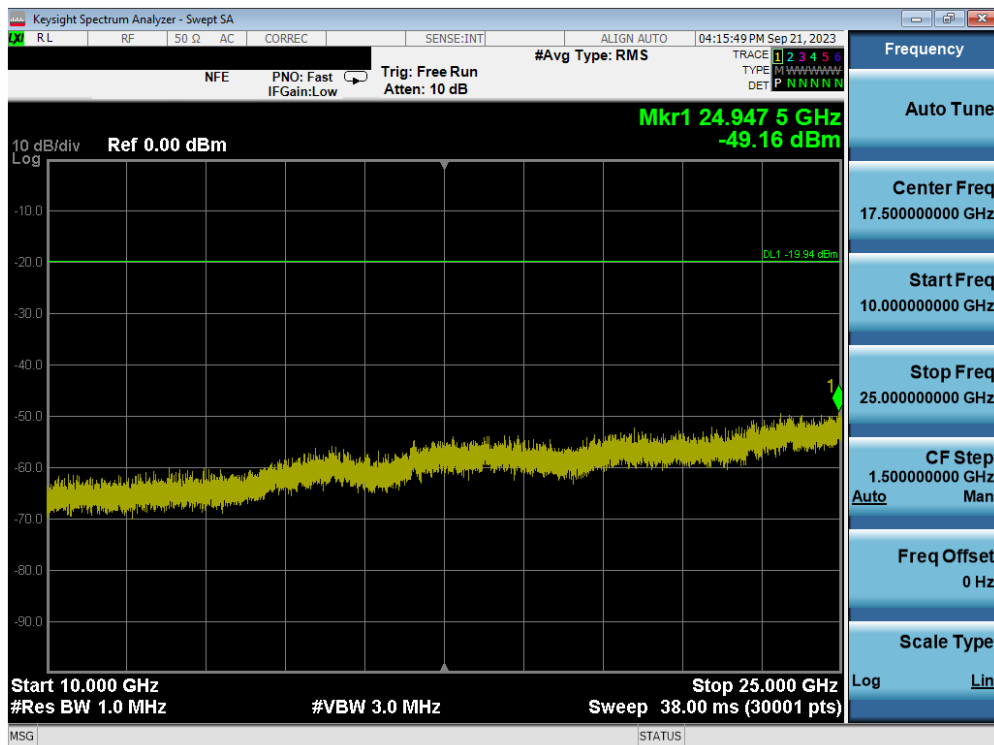


Plot 7-44. Conducted Spurious Plot MIMO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 6)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 48 of 74



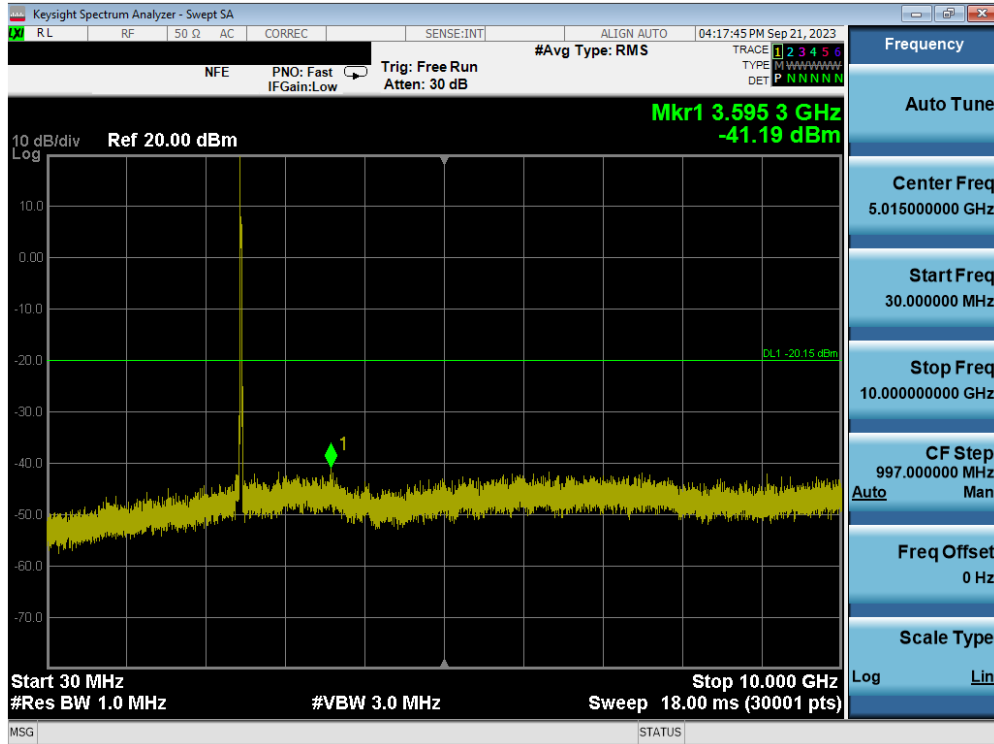


Plot 7-45. Conducted Spurious Plot MIMO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 11)

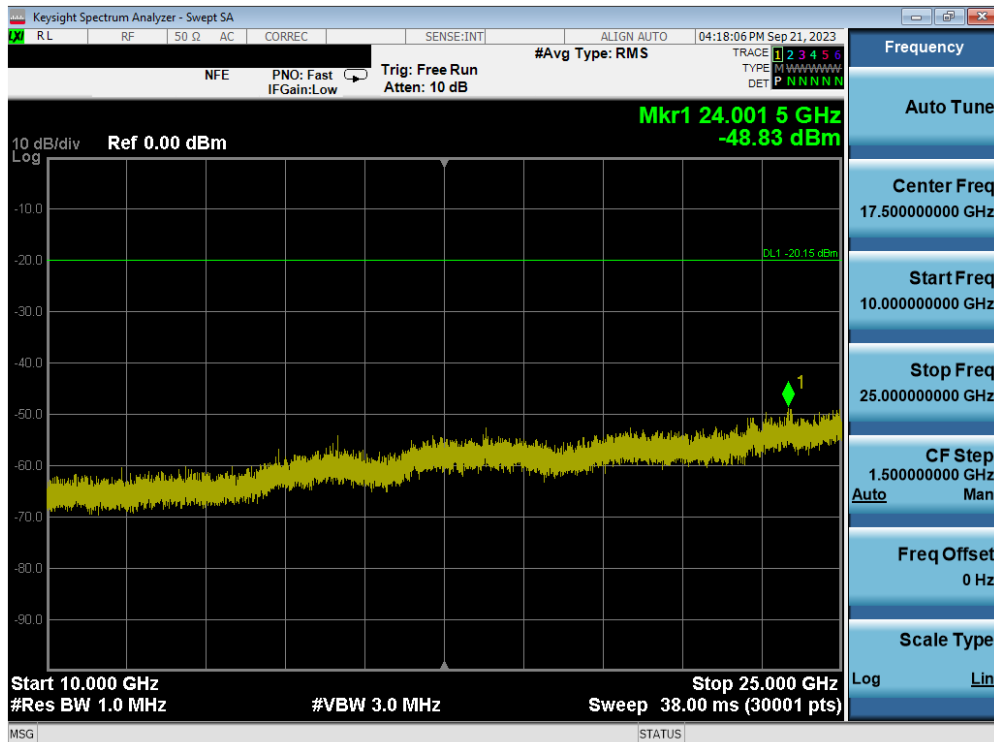


Plot 7-46. Conducted Spurious Plot MIMO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 11)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 49 of 74

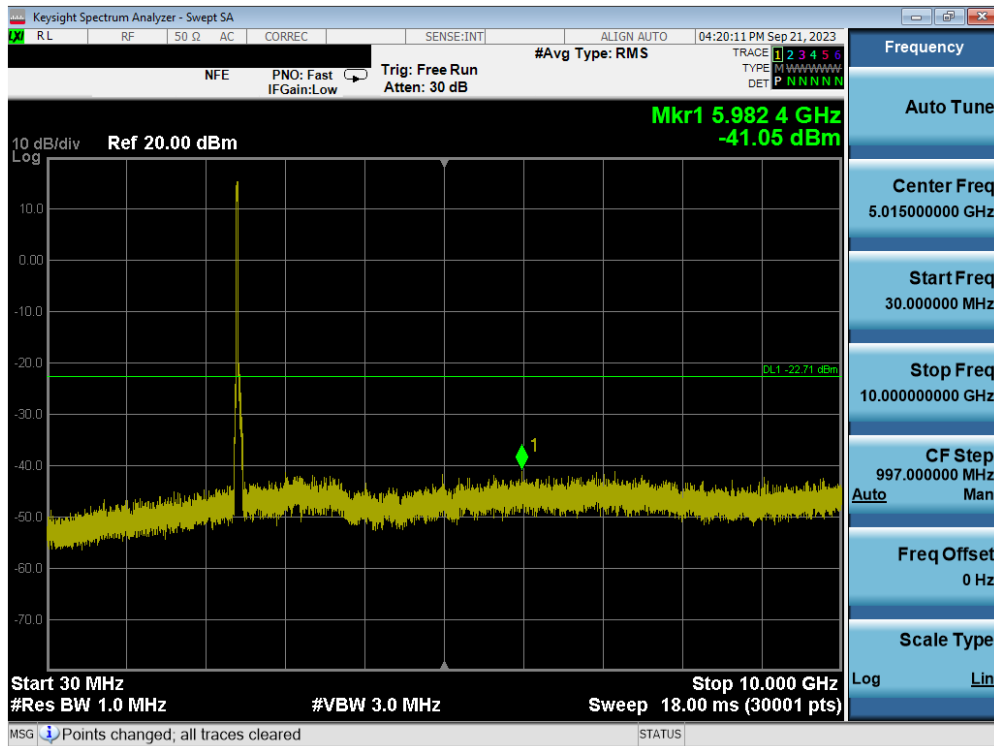


Plot 7-47. Conducted Spurious Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 1)

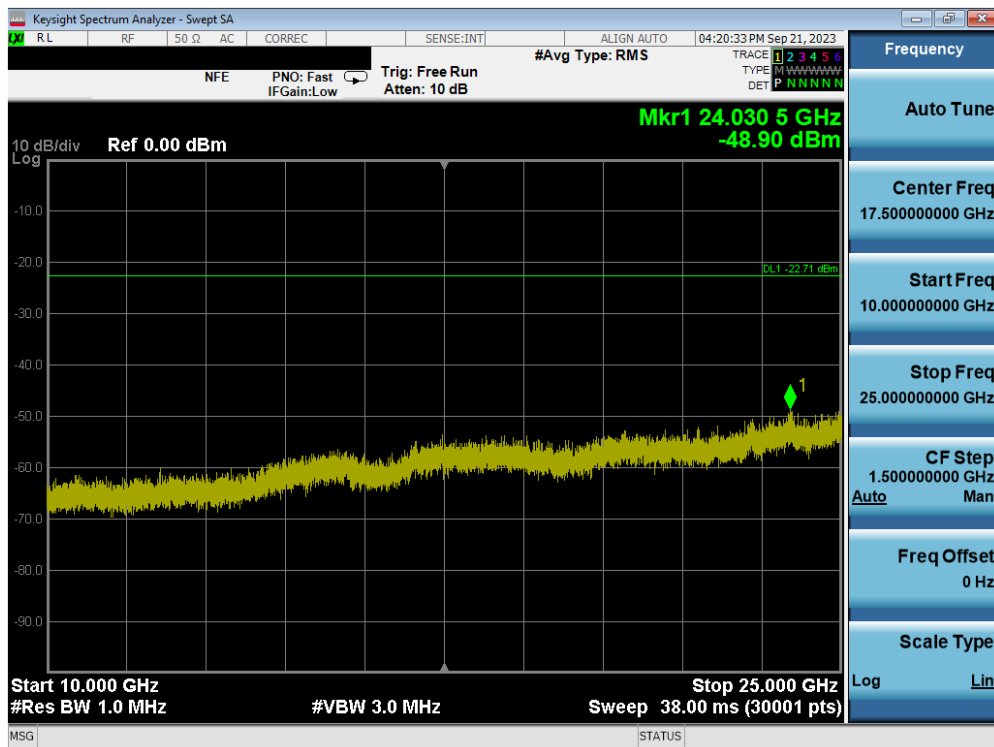


Plot 7-48. Conducted Spurious Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 1)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 50 of 74

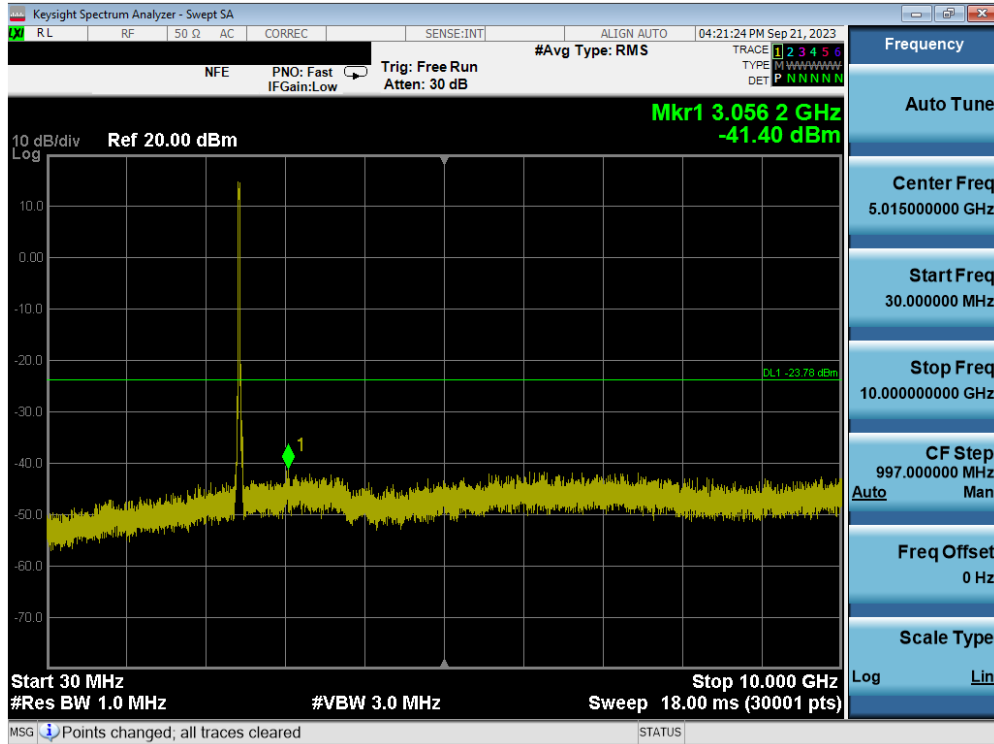


Plot 7-49. Conducted Spurious Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 6)

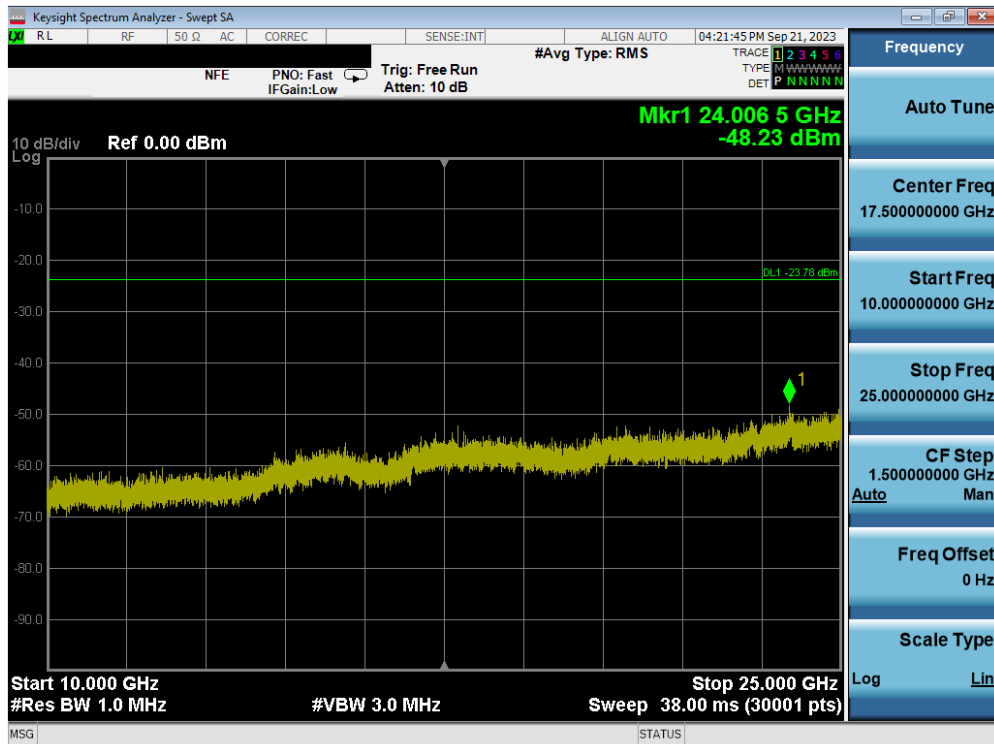


Plot 7-50. Conducted Spurious Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 6)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 51 of 74

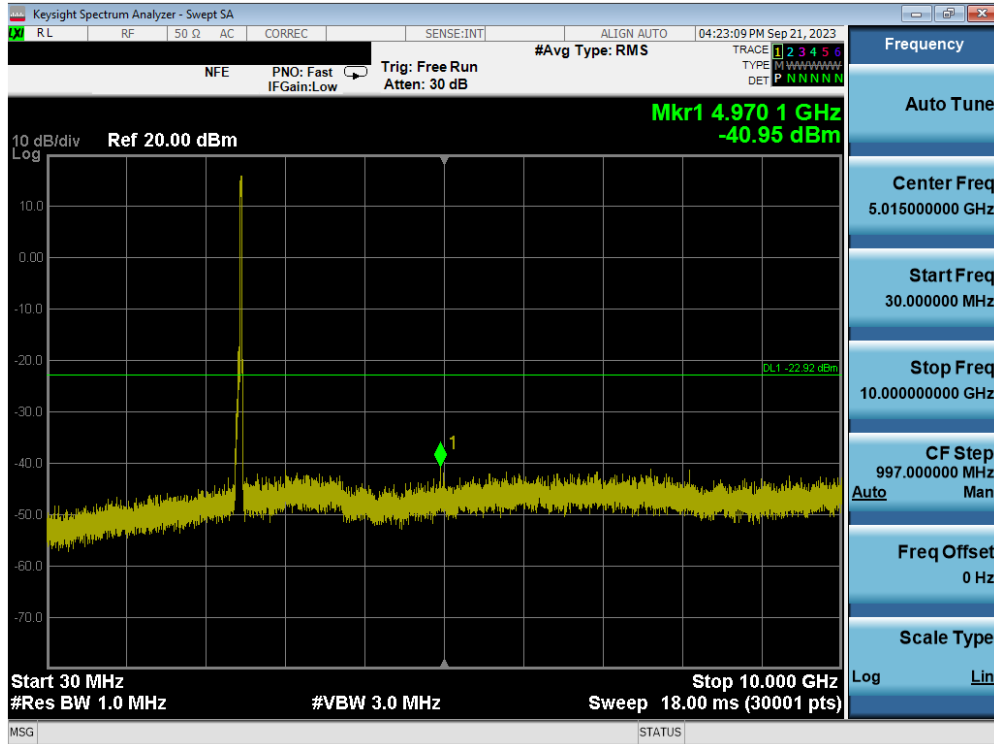


Plot 7-51. Conducted Spurious Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 11)

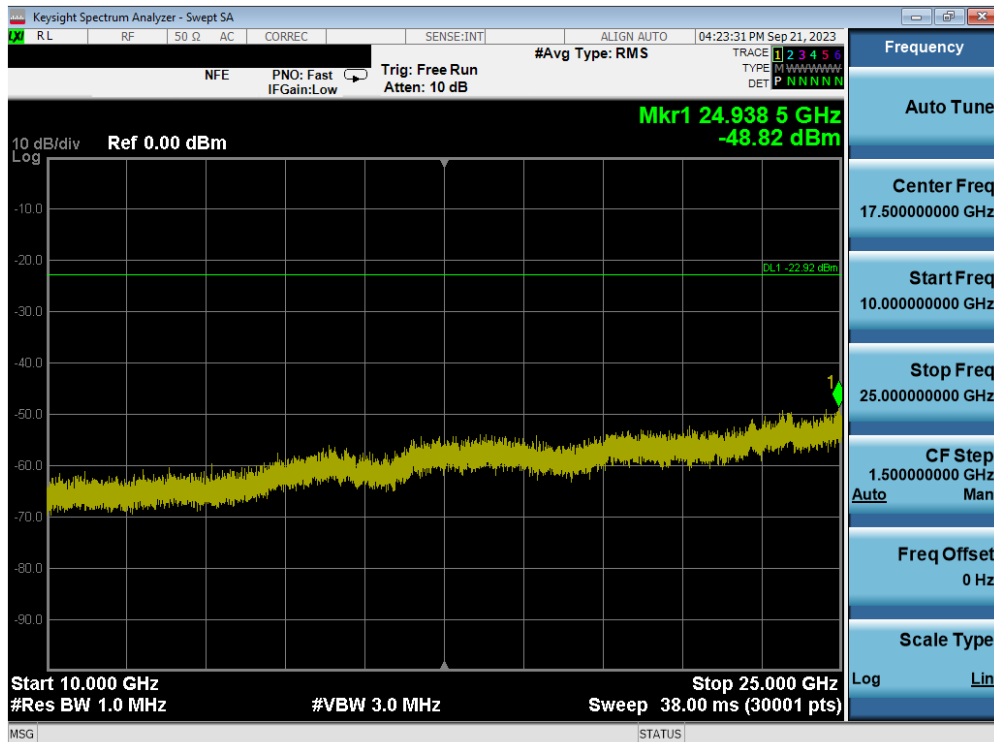


Plot 7-52. Conducted Spurious Plot MIMO ANT1 (802.11ax OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 52 of 74

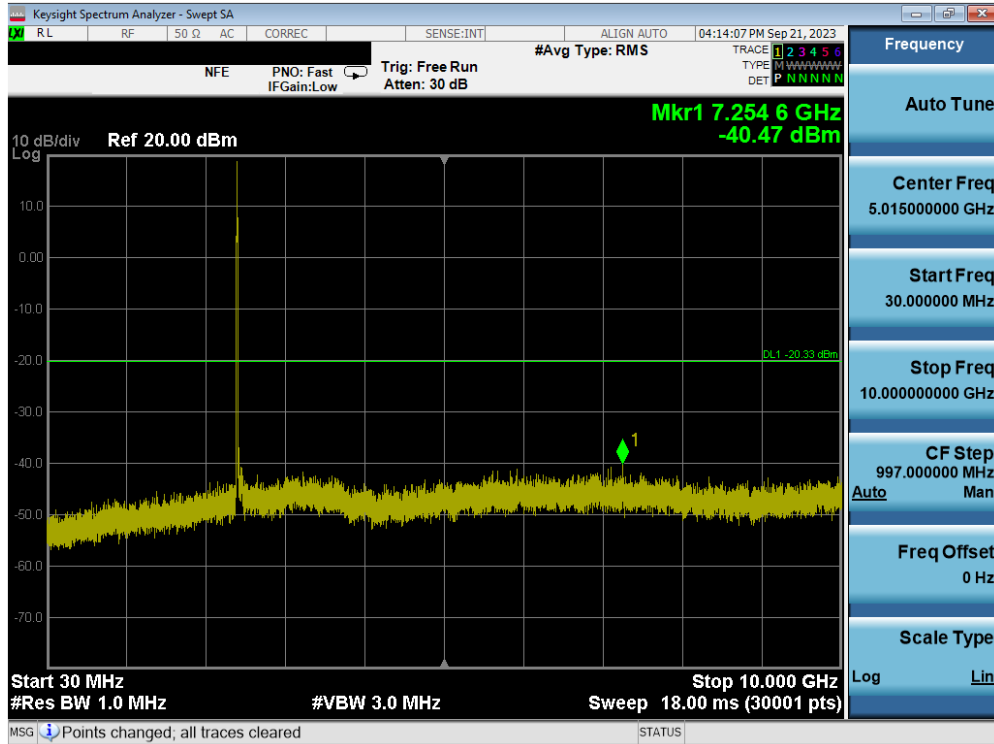


Plot 7-53. Conducted Spurious Plot MIMO ANT1 (802.11ax OFDMA – 26 Tones – Ch. 1)

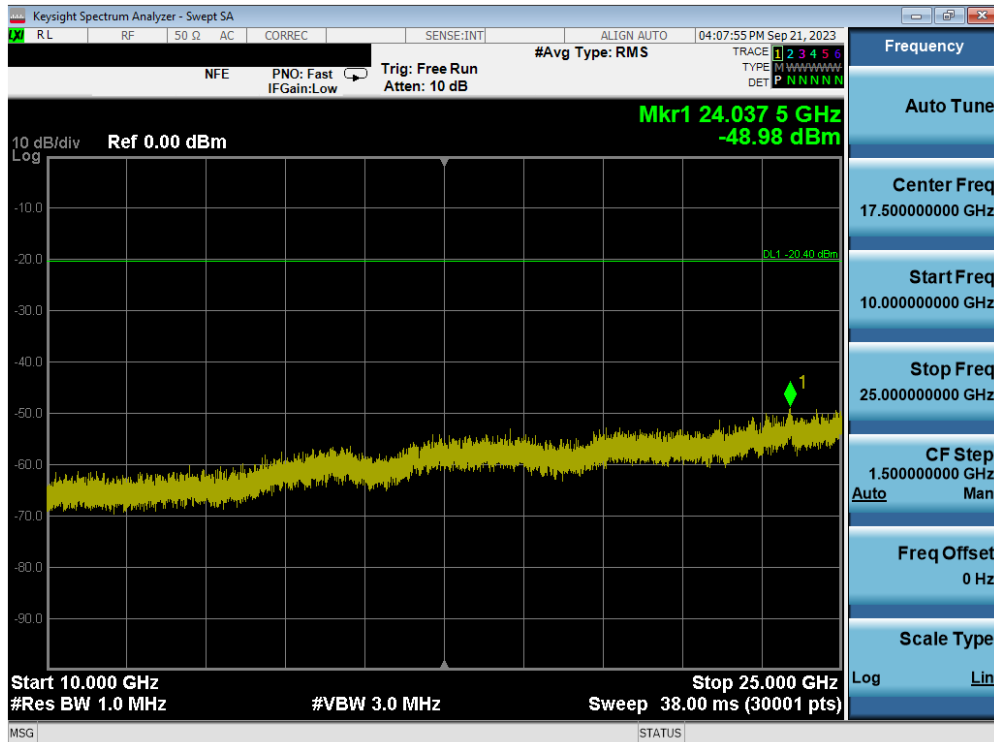


Plot 7-54. Conducted Spurious Plot MIMO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 1)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 53 of 74

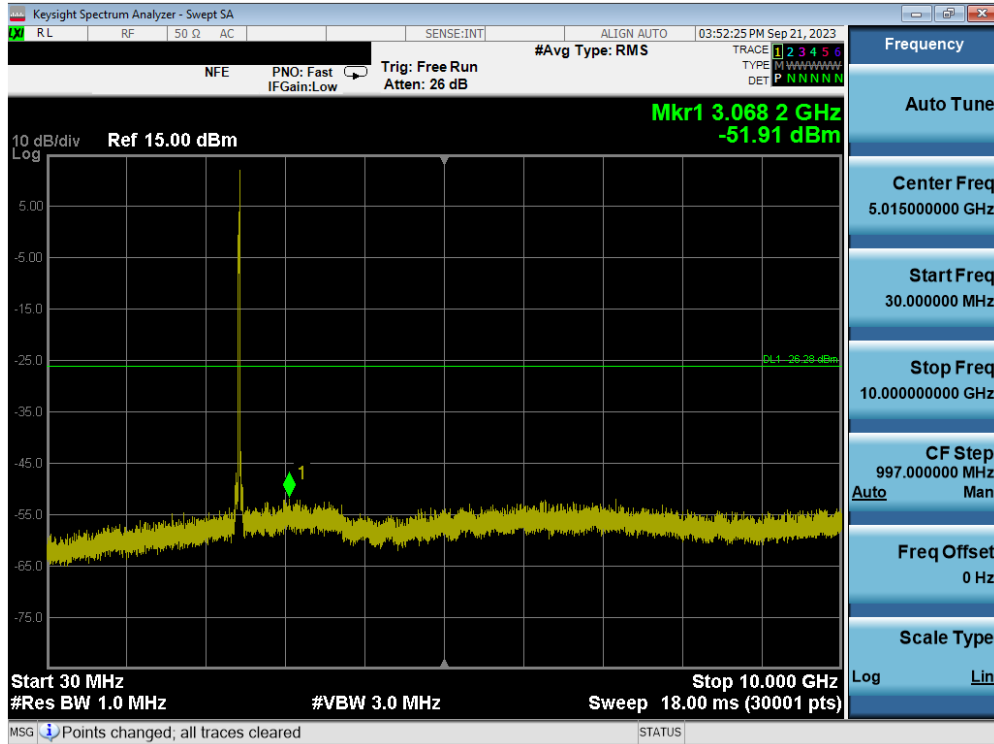


Plot 7-55. Conducted Spurious Plot MIMO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 6)

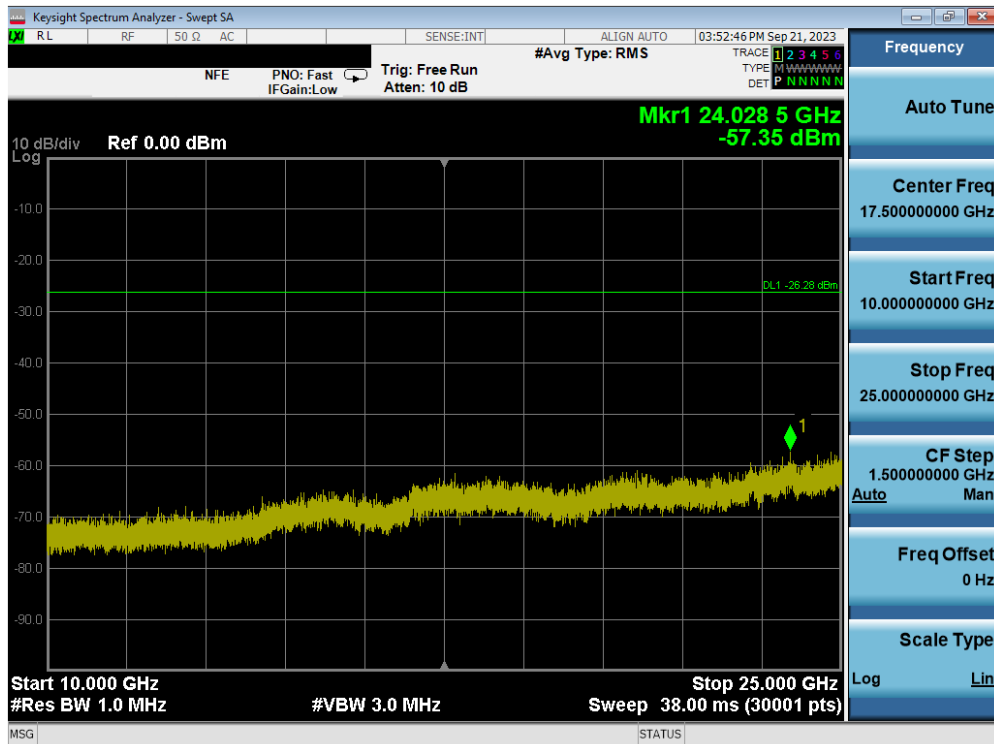


Plot 7-56. Conducted Spurious Plot MIMO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 6)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 54 of 74

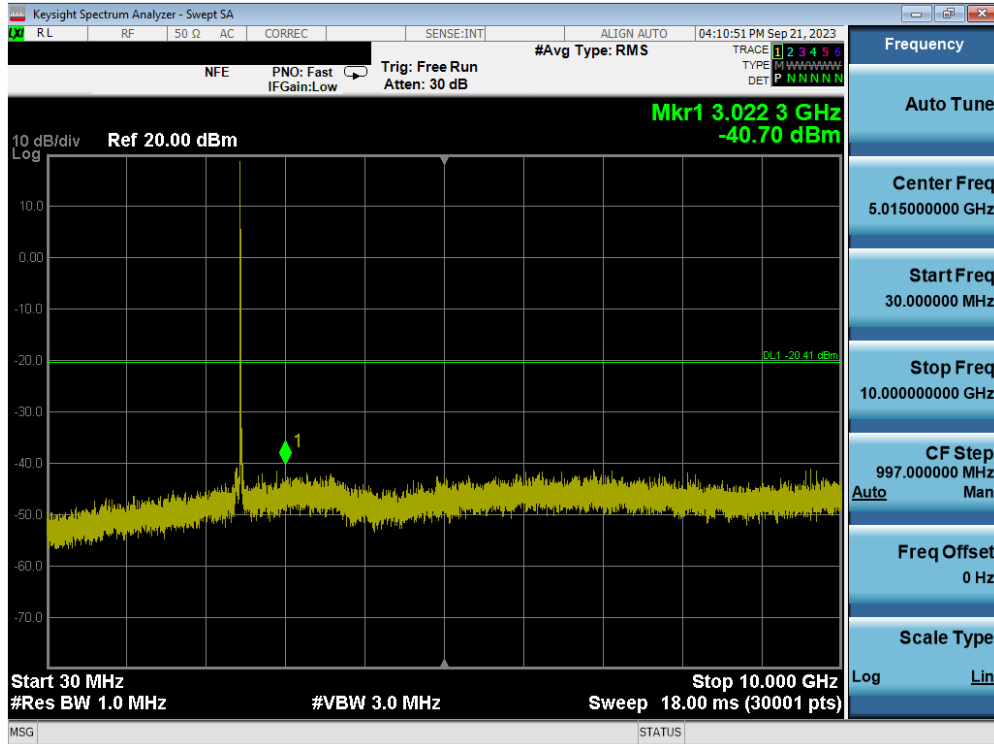


Plot 7-57. Conducted Spurious Plot MIMO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 11)

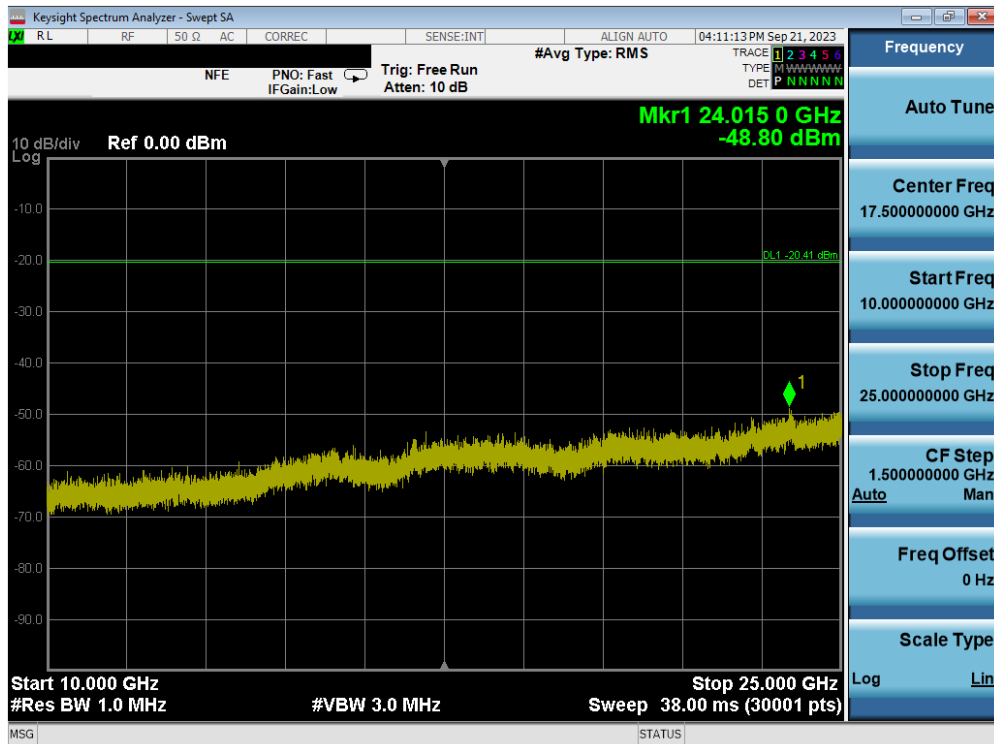


Plot 7-58. Conducted Spurious Plot MIMO ANT2 (802.11ax OFDMA – 26 Tones – Ch. 11)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 55 of 74

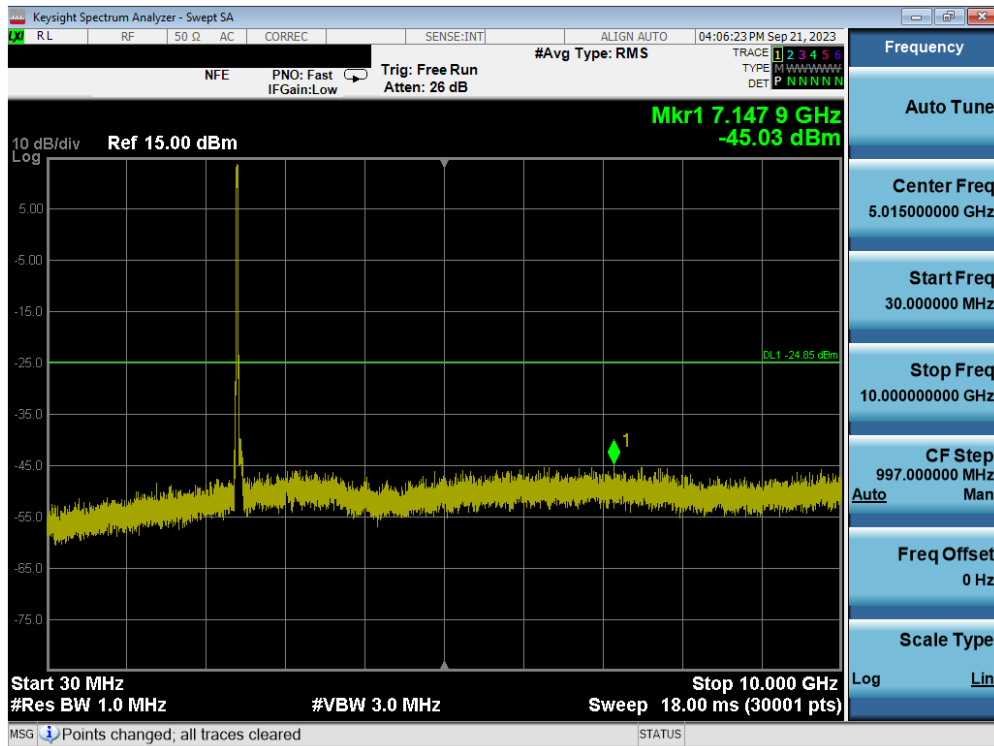


Plot 7-59. Conducted Spurious Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 1)

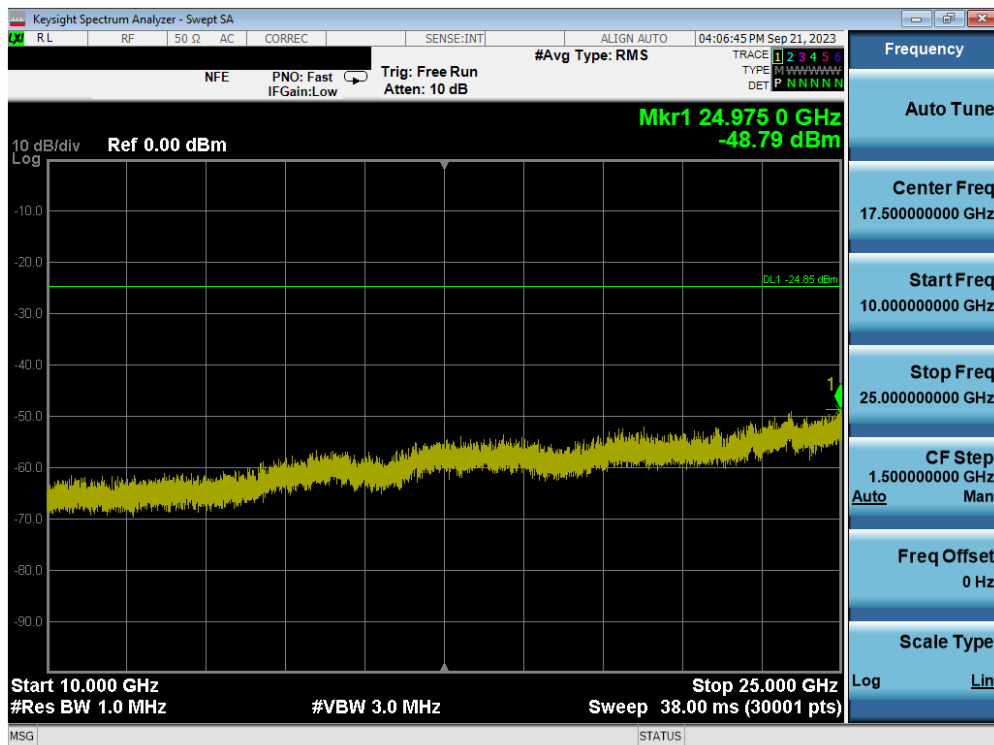


Plot 7-60. Conducted Spurious Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 1)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 56 of 74



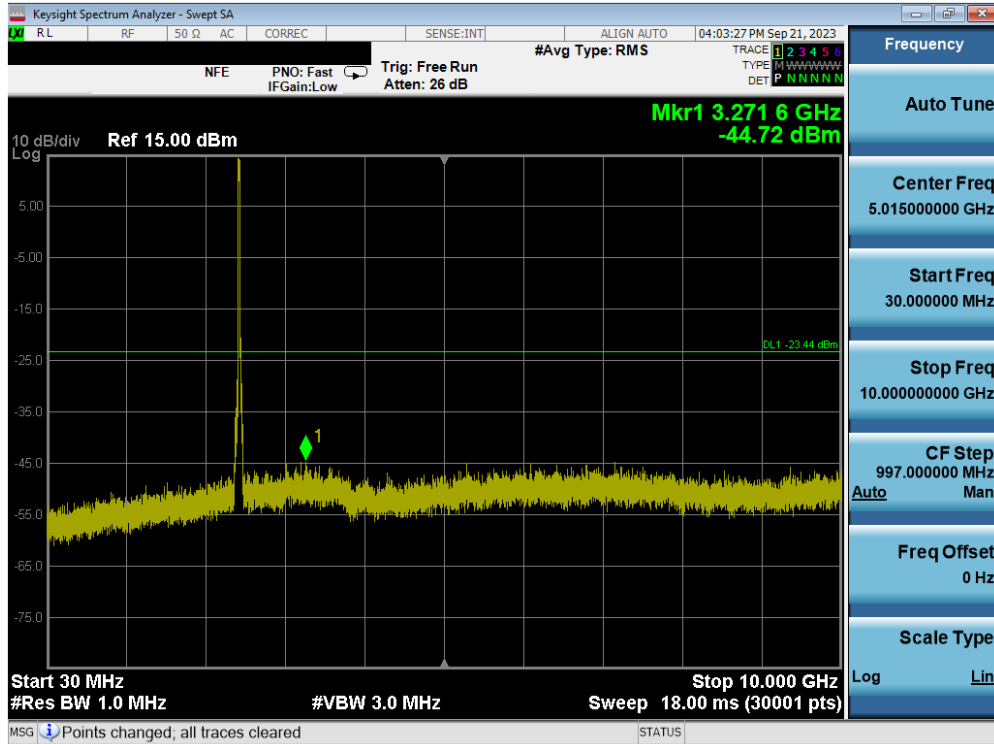


Plot 7-61. Conducted Spurious Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 6)

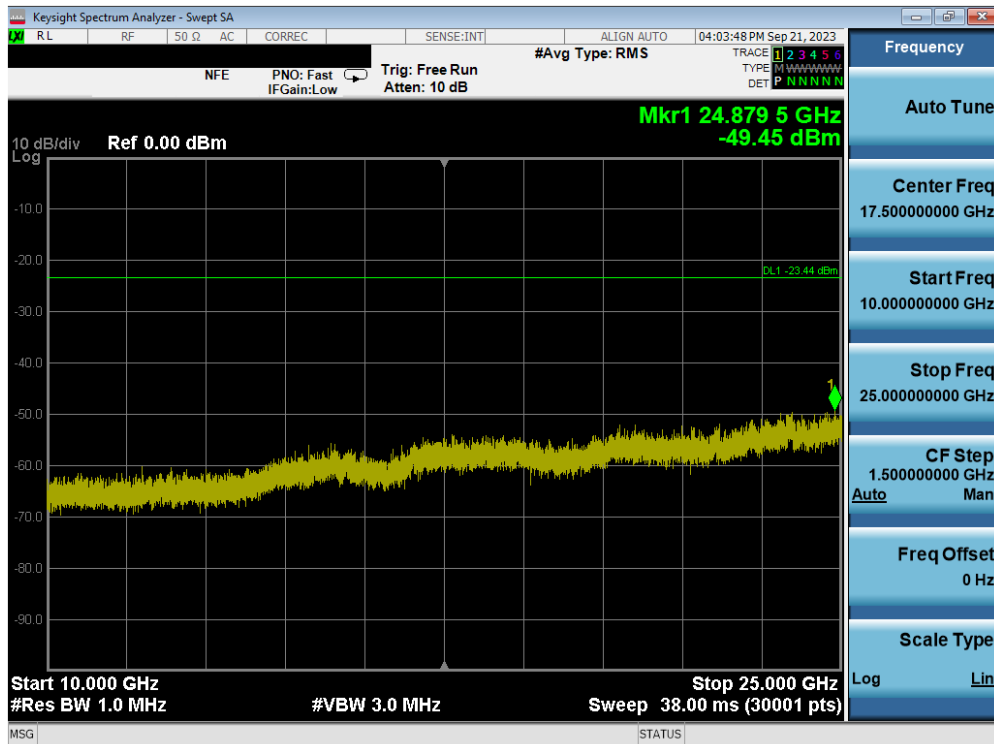


Plot 7-62. Conducted Spurious Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 6)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 57 of 74

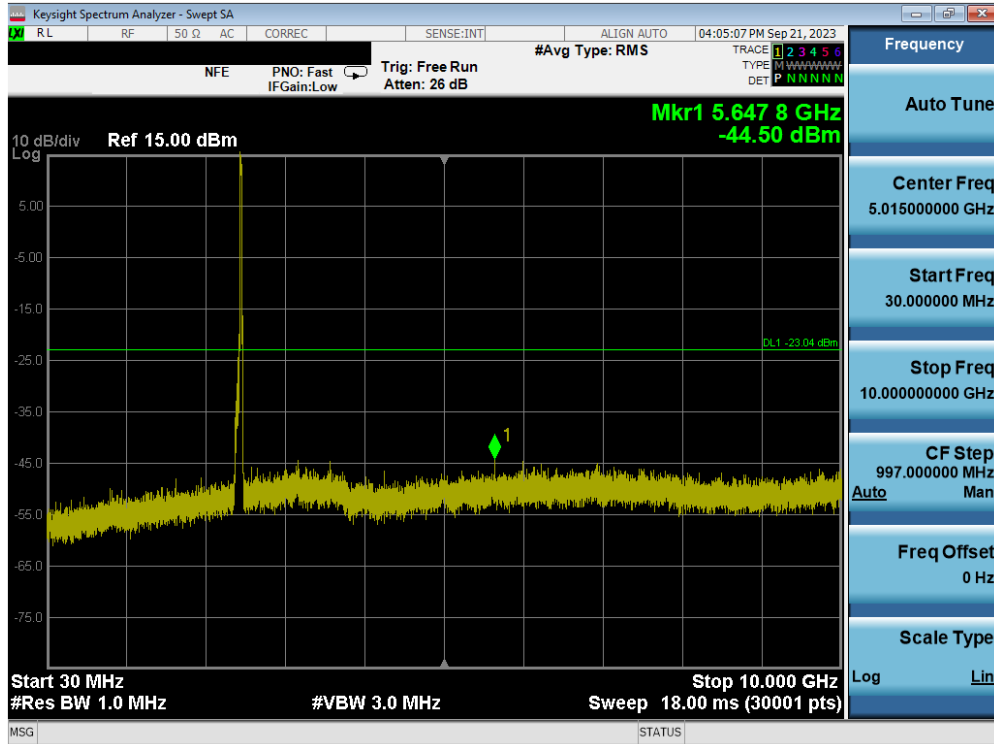

Plot 7-63. Conducted Spurious Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 11)

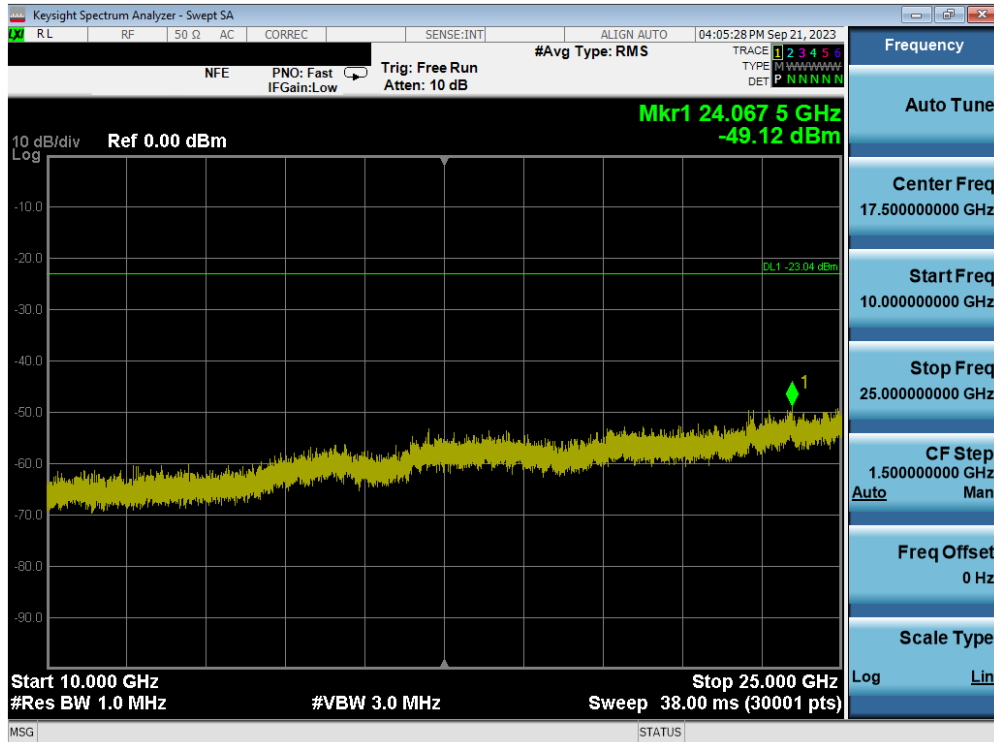

Plot 7-64. Conducted Spurious Plot MIMO ANT2 (802.11ax OFDMA – 242 Tones – Ch. 11)

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 58 of 74

## 7.7 Radiated Emission Measurements

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in FCC §15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown FCC §15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-24. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013 – Section 6.6.4.3

### Test Settings

#### Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces


FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 59 of 74

**Peak Field Strength Measurements**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

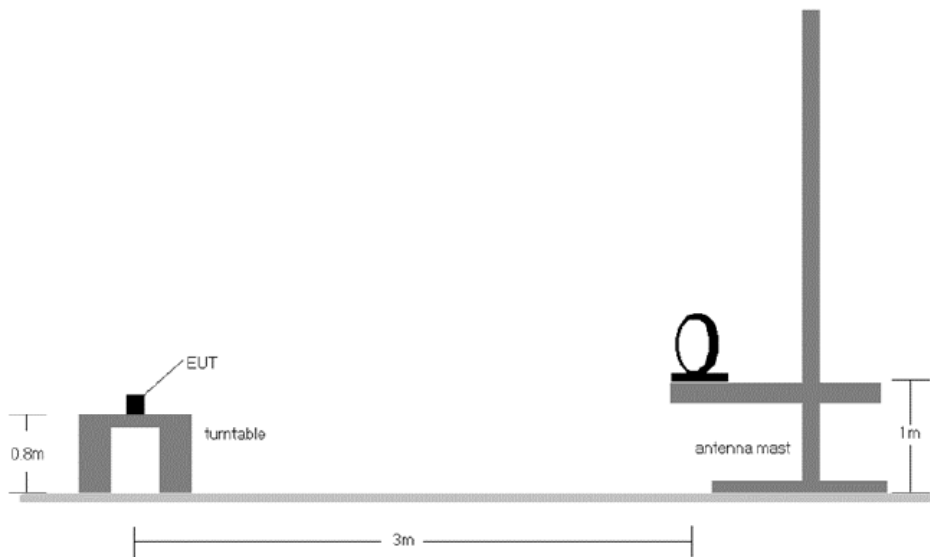


**Figure 7-6. Radiated Test Setup < 30MHz**

<b>FCC ID:</b> A3LSMS928JPN	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2312110124-07.A3L	<b>Test Dates:</b> 9/6/2023 - 11/06/2023	<b>EUT Type:</b> Portable Handset	Page 60 of 74

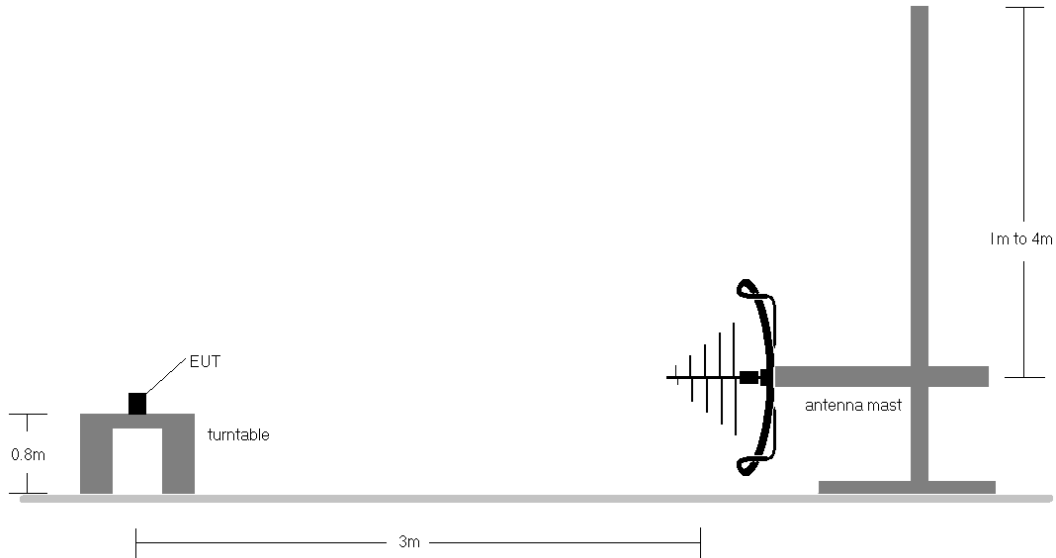

**Figure 7-7. Radiated Test Setup < 1GHz**

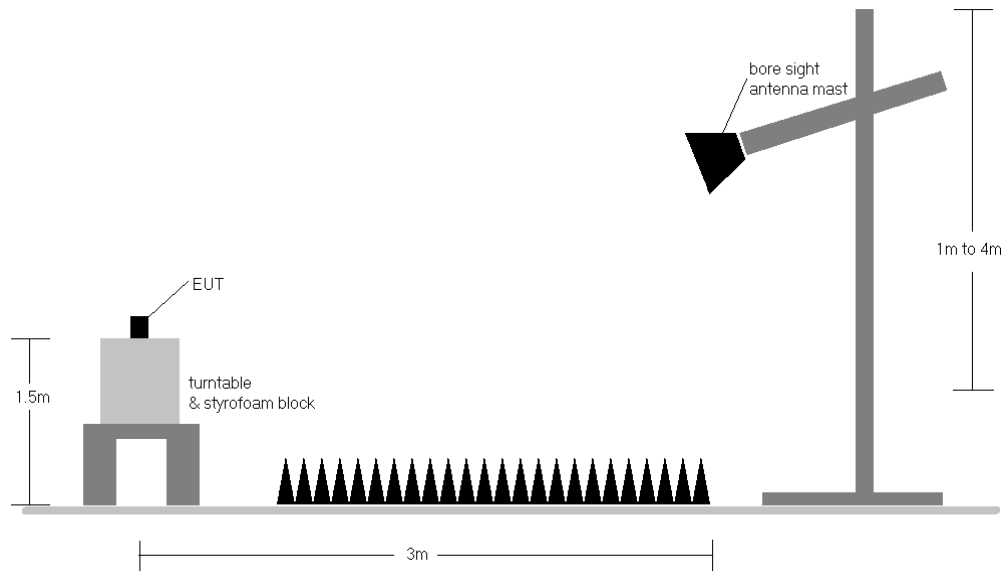

**Figure 7-8. Test Instrument & Measurement Setup**

**Test Notes**

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of ANSI C63.10-2013 Section 11.3 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limits shown in §15.209.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 61 of 74

4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
9. Some band edge measurements were performed using a channel integration method to determine compliance with the out of band average radiated spurious emissions limit in the 2483.5 – 2500MHz band. Per KDB 558074 D01 v05r02 Section 13.3, a measurement was performed using a RBW of 100kHz at the frequency with highest emission outside of band edge. For integration that does not start at 2483.5MHz, consideration was taken to ensure the worst-case emission is in the 1MHz spectrum. The results were integrated up to the 1MHz reference bandwidth to show compliance with the 15.209 radiated limit for emissions greater than 1GHz.
10. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

## **Sample Calculations**

### **Determining Spurious Emissions Levels**


- Field Strength Level  $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

### **Radiated Band Edge Measurement Offset**


- The amplitude offset shown in the radiated restricted band edge plots in Section 0 was calculated using the formula:  
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

<b>FCC ID:</b> A3LSMS928JPN	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2312110124-07.A3L	<b>Test Dates:</b> 9/6/2023 - 11/06/2023	<b>EUT Type:</b> Portable Handset	Page 62 of 74


## 7.7.2 MIMO Radiated Spurious Emission Measurements

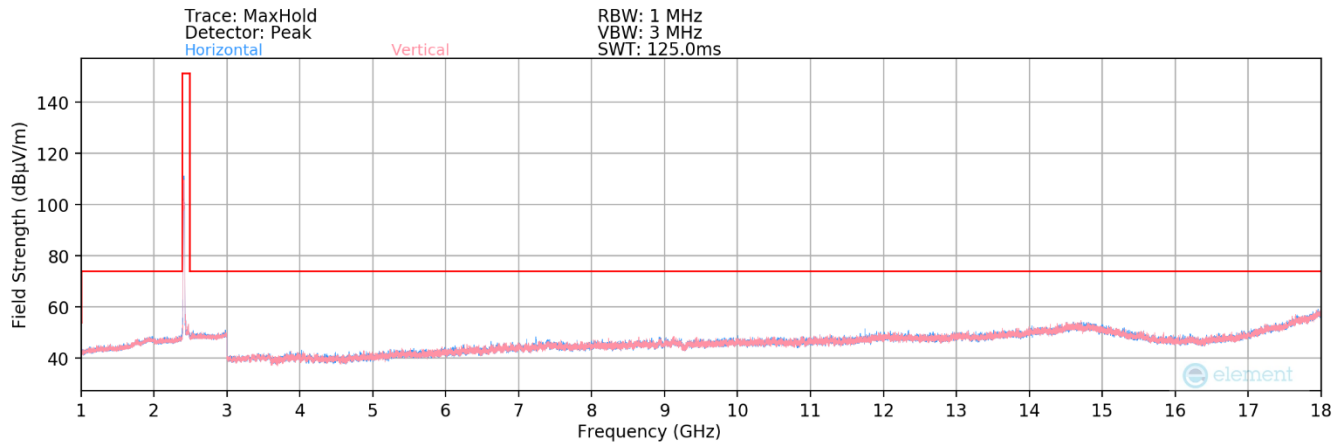

Plot 7-65. Radiated Spurious Plot above 1GHz MIMO (802.11ax OFDMA – 26 Tones – Ch. 1)

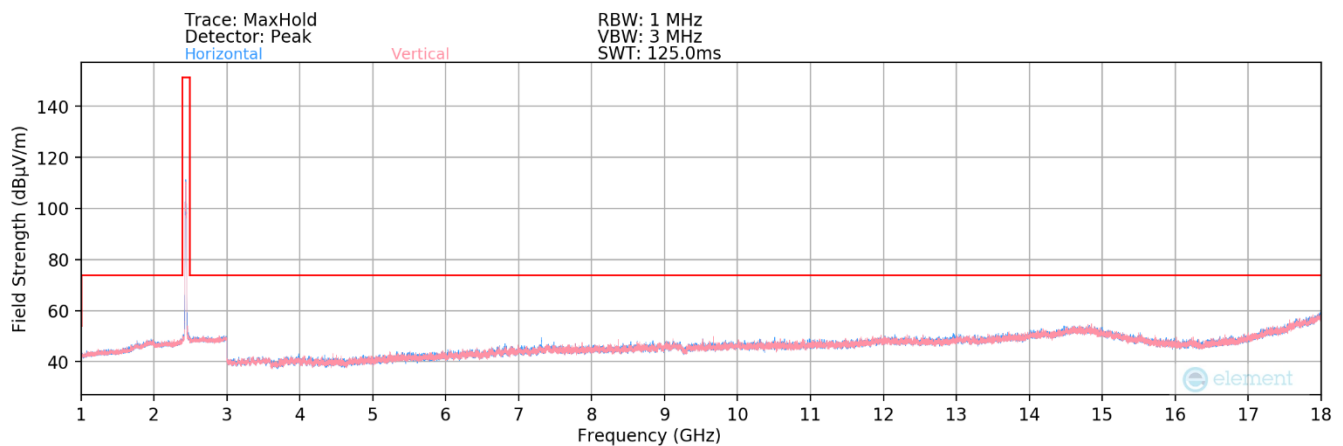


Plot 7-66. Radiated Spurious Plot above 1GHz MIMO (802.11ax OFDMA – 26 Tones – Ch. 6)

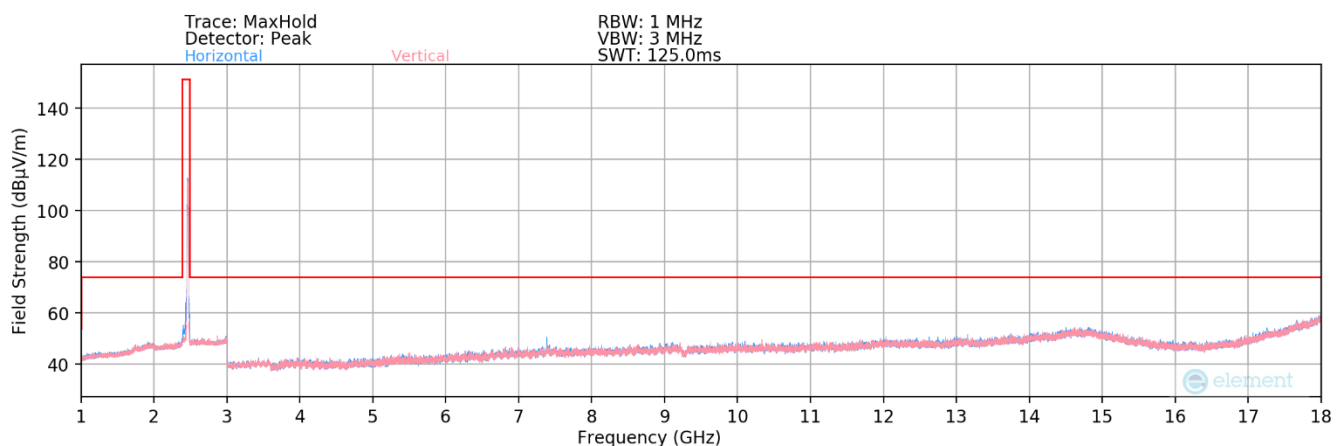


Plot 7-67. Radiated Spurious Plot above 1GHz MIMO (802.11ax OFDMA – 26 Tones – Ch. 11)


FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 63 of 74

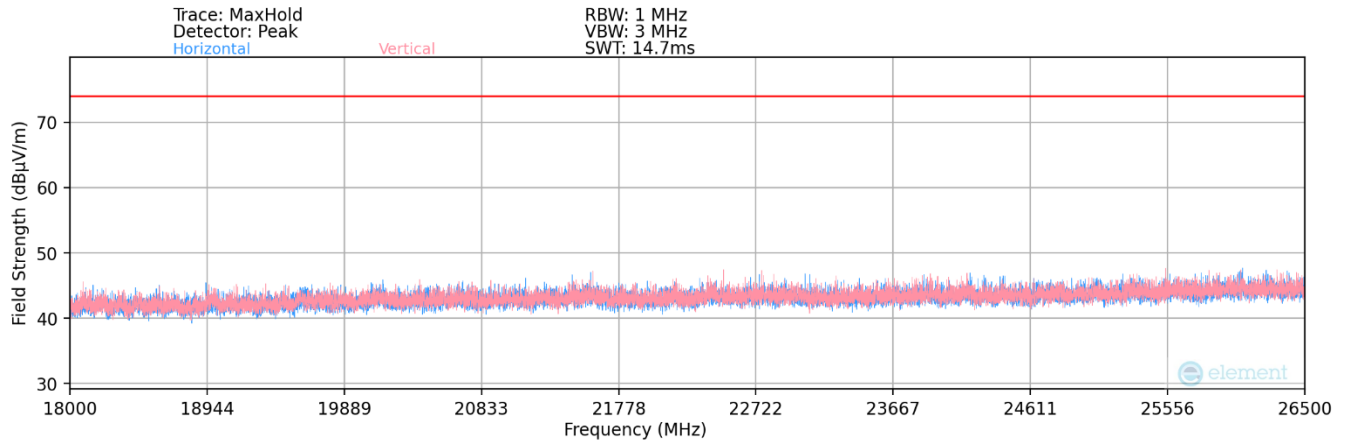

**Plot 7-68. Radiated Spurious Plot above 18GHz MIMO (802.11ax OFDMA – 26 Tones)**

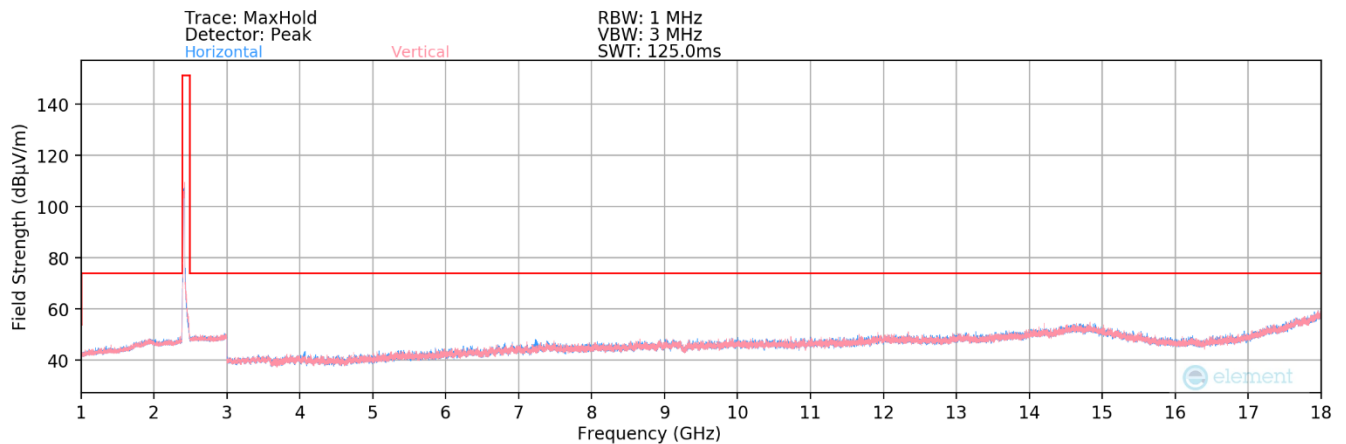


**Plot 7-69. Radiated Spurious Plot above 1GHz MIMO (802.11ax OFDMA – 242 Tones – Ch. 1)**

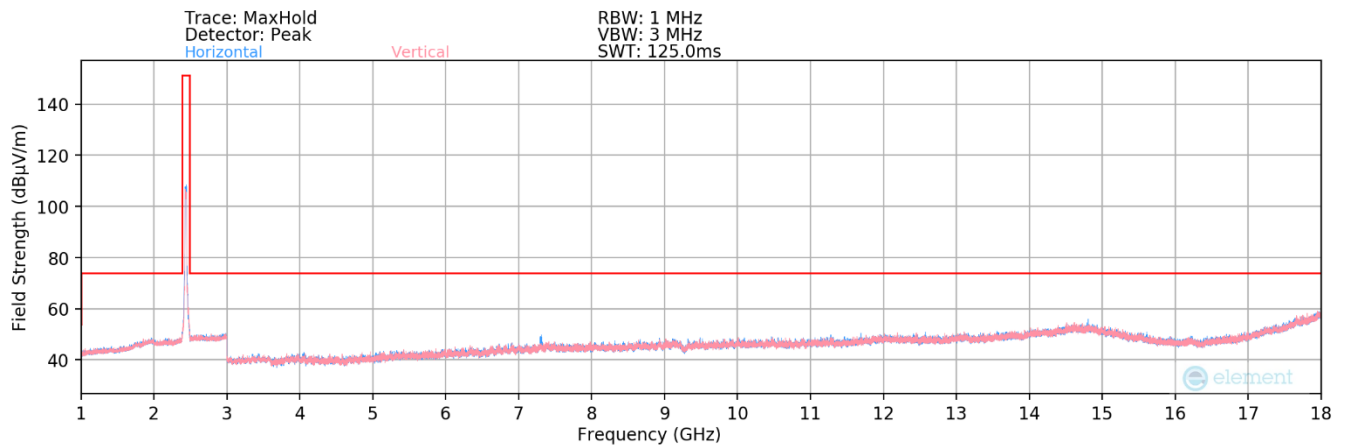


**Plot 7-70. Radiated Spurious Plot above 1GHz MIMO (802.11ax OFDMA – 242 Tones – Ch. 6)**

<b>FCC ID:</b> A3LSMS928JPN	<b>MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2312110124-07.A3L	<b>Test Dates:</b> 9/6/2023 - 11/06/2023	<b>EUT Type:</b> Portable Handset	Page 64 of 74



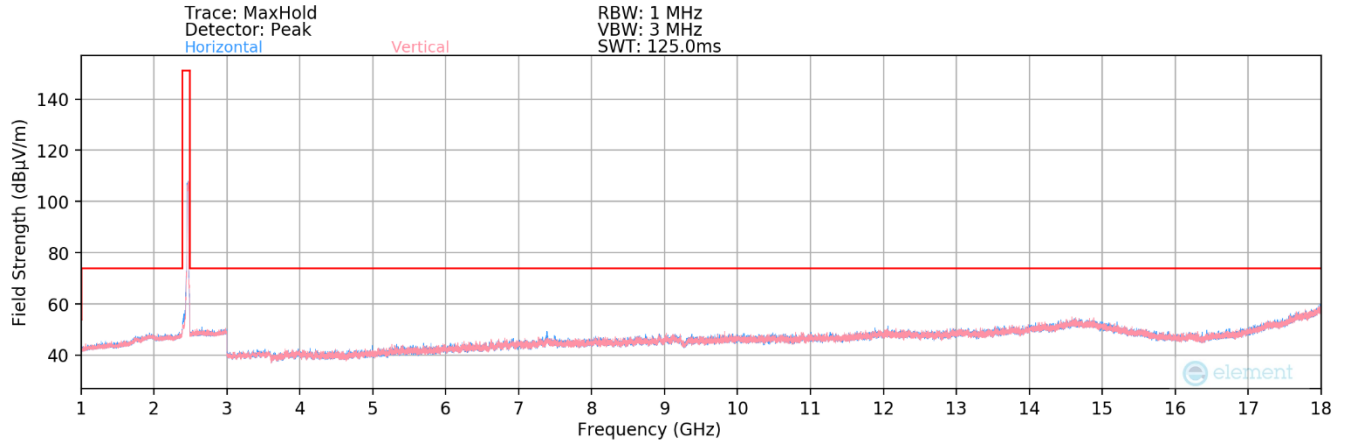

**Plot 7-71. Radiated Spurious Plot above 1GHz MIMO (802.11ax OFDMA – 242 Tones – Ch. 11)**

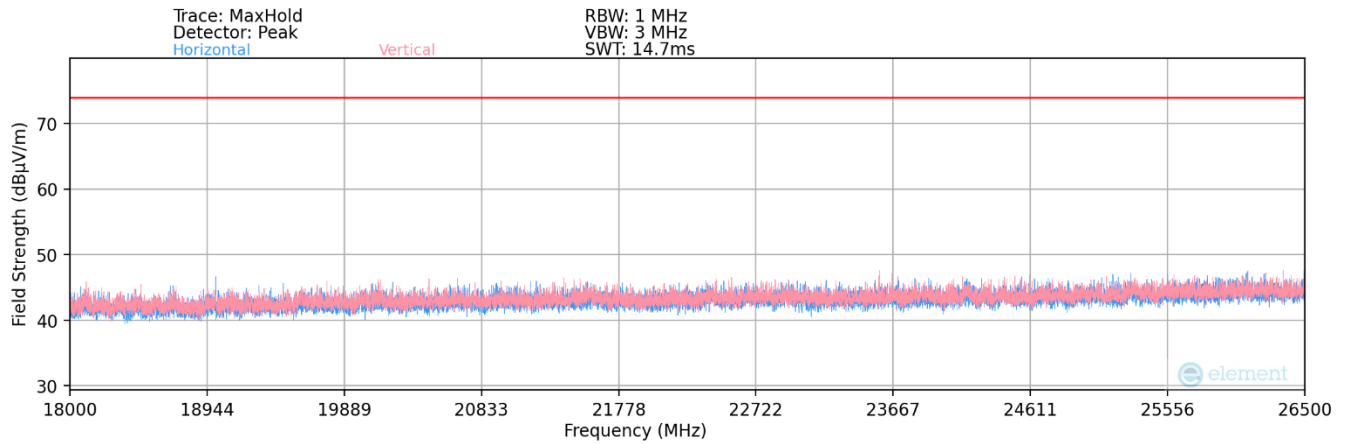

**Plot 7-72. Radiated Spurious Plot above 18GHz MIMO (802.11ax OFDMA – 242 Tones)**

FCC ID: A3LSMS928JPN	<b>MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 65 of 74



## MIMO Radiated Spurious Emission Measurements

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 4  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4824.00	Avg	H	400	76	-74.69	-1.53	30.78	53.98	-23.20
4824.00	Peak	H	400	76	-62.23	-1.53	43.24	73.98	-30.74
12060.00	Avg	H	-	-	-78.41	9.65	38.24	53.98	-15.74
12060.00	Peak	H	-	-	-66.43	9.65	50.22	73.98	-23.76

**Table 7-25. Radiated Measurements MIMO (26 Tones)**

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 4  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	Avg	H	-	-	-74.74	-1.38	30.88	53.98	-23.10
4874.00	Peak	H	-	-	-62.89	-1.38	42.73	73.98	-31.25
7311.00	Avg	H	-	-	-76.05	4.59	35.54	53.98	-18.44
7311.00	Peak	H	-	-	-63.87	4.59	47.72	73.98	-26.26
12185.00	Avg	H	-	-	-78.25	9.66	38.41	53.98	-15.57
12185.00	Peak	H	-	-	-66.62	9.66	50.04	73.98	-23.94

**Table 7-26. Radiated Measurements MIMO (26 Tones)**

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 66 of 74



Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 4  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4924.00	Avg	H	-	-	-75.05	-1.16	30.79	53.98	-23.19
4924.00	Peak	H	-	-	-62.75	-1.16	43.09	73.98	-30.89
7386.00	Avg	H	-	-	-75.99	4.81	35.82	53.98	-18.16
7386.00	Peak	H	-	-	-64.11	4.81	47.70	73.98	-26.28
12310.00	Avg	H	-	-	-78.25	9.69	38.44	53.98	-15.54
12310.00	Peak	H	-	-	-66.70	9.69	49.99	73.98	-23.99

**Table 7-27. Radiated Measurements MIMO (26 Tones)**

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4824.00	Avg	H	-	-	-74.73	-1.53	30.74	53.98	-23.24
4824.00	Peak	H	-	-	-60.30	-1.53	45.17	73.98	-28.81
12060.00	Avg	H	-	-	-78.40	9.65	38.25	53.98	-15.73
12060.00	Peak	H	-	-	-64.04	9.65	52.61	73.98	-21.37

**Table 7-28. Radiated Measurements MIMO (242 Tones)**

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 67 of 74

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 6

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4874.00	Avg	H	-	-	-74.66	-1.38	30.96	53.98	-23.02
4874.00	Peak	H	-	-	-59.86	-1.38	45.76	73.98	-28.22
7311.00	Avg	H	-	-	-76.01	4.59	35.58	53.98	-18.40
7311.00	Peak	H	-	-	-60.99	4.59	50.60	73.98	-23.38
12185.00	Avg	H	-	-	-78.35	9.66	38.31	53.98	-15.67
12185.00	Peak	H	-	-	-63.61	9.66	53.05	73.98	-20.93

**Table 7-29. Radiated Measurements MIMO (242 Tones)**

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4924.00	Avg	H	-	-	-74.97	-1.16	30.87	53.98	-23.11
4924.00	Peak	H	-	-	-62.87	-1.16	42.97	73.98	-31.01
7386.00	Avg	H	-	-	-75.97	4.81	35.84	53.98	-18.14
7386.00	Peak	H	-	-	-64.24	4.81	47.57	73.98	-26.41
12310.00	Avg	H	-	-	-78.23	9.69	38.46	53.98	-15.52
12310.00	Peak	H	-	-	-66.36	9.69	50.33	73.98	-23.65


**Table 7-30. Radiated Measurements MIMO (242 Tones)**

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 68 of 74


### 7.7.3 MIMO Radiated Restricted Band Edge Measurements

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	53
Distance of Measurements:	3 Meters
Operating Frequency:	2412MHz
Channel:	1

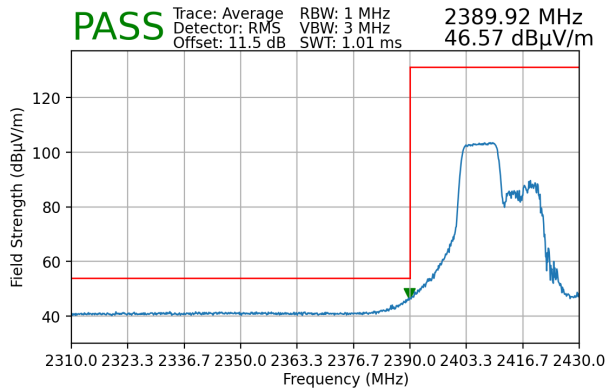


**Plot 7-73. Radiated Restricted Lower Band Edge Measurement MIMO (Average – 106 Tones)**

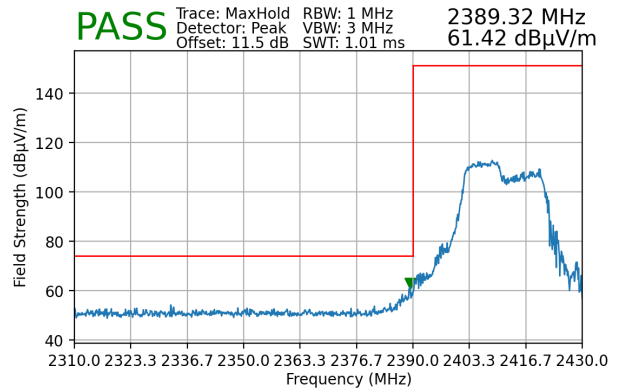


**Plot 7-74. Radiated Restricted Lower Band Edge Measurement MIMO (Peak – 106 Tones)**

Worst Case Mode:	802.11ax OFDMA
Worst Case Transfer Rate:	MCS0
RU Index:	54
Distance of Measurements:	3 Meters
Operating Frequency:	2462MHz
Channel:	11

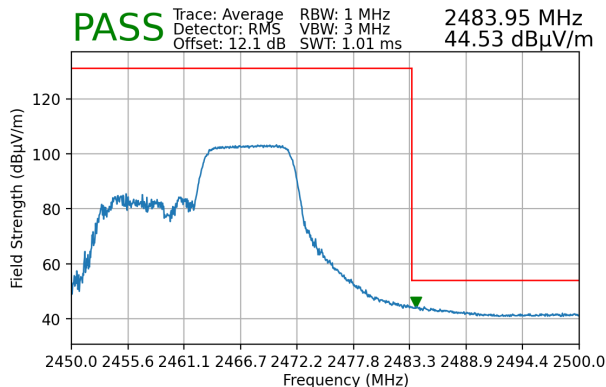


**Plot 7-75. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 Tones)**

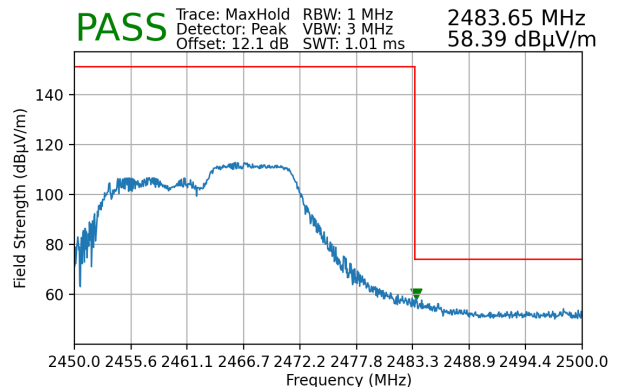


**Plot 7-76. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 Tones)**

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 69 of 74

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 54  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2467MHz  
 Channel: 12

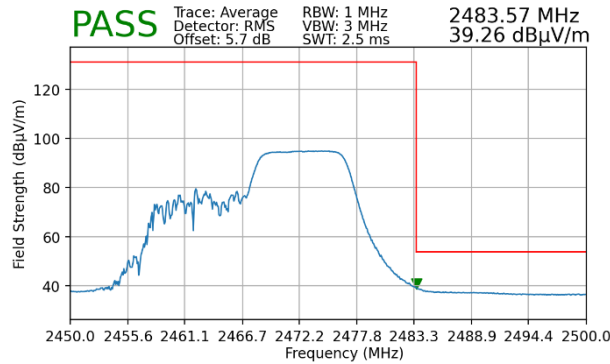


**Plot 7-77. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 Tones)**

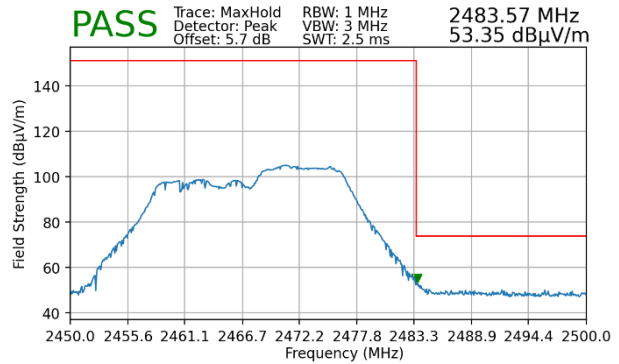


**Plot 7-78. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 Tones)**

Worst Case Mode: 802.11ax OFDMA  
 Worst Case Transfer Rate: MCS0  
 RU Index: 54  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2472MHz  
 Channel: 13

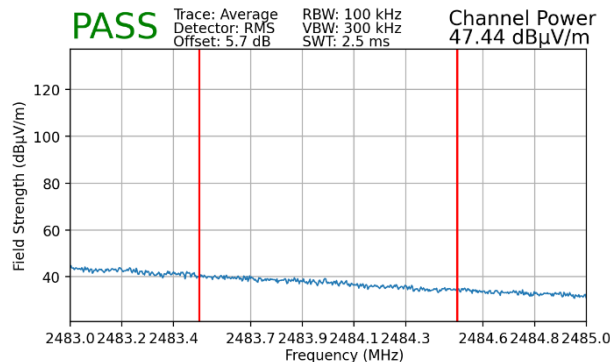

**Plot 7-79. Radiated Restricted Upper Band Edge Measurement MIMO (Average – 106 Tones)**

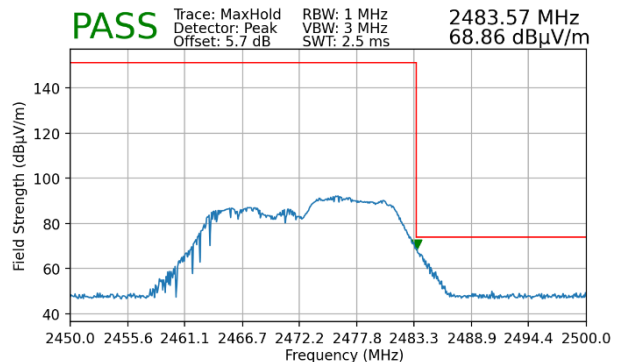

**Plot 7-80. Radiated Restricted Upper Band Edge Measurement MIMO (Peak – 106 Tones)**

FCC ID: A3LSMS928JPN	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2312110124-07.A3L	Test Dates: 9/6/2023 - 11/06/2023	EUT Type: Portable Handset	Page 70 of 74