

TEST REPORT

FCC BT Test for SM-S931B/DS
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2410-FC067

DATE OF ISSUE
October 29, 2024

Tested by
Sang Hoon Lee



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2410-FC067

DATE OF ISSUE

October 29, 2024

Additional Model

SM-S931B

Applicant

SAMSUNG Electronics Co., Ltd.

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name

Mobile Phone

Model Name

SM-S931B/DS

FCC ID

A3LSMS931B

Date of Test

September 04, 2024 ~ October 29, 2024

Test Results

PASS

FCC Classification

FCC Part 15 Spread Spectrum Transmitter

Test Standard Used

FCC Rule Part(s): Part 15 subpart C 15.247

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing Lab

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	October 29, 2024	Initial Release

Notice

Content

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. Requirements for Bluetooth transmitter(15.247)	7
3. TEST METHODOLOGY	7
EUT CONFIGURATION	7
EUT EXERCISE	8
GENERAL TEST PROCEDURES	8
DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION	9
5. FACILITIES AND ACCREDITATIONS	9
FACILITIES	9
EQUIPMENT	9
6. ANTENNA REQUIREMENTS	9
7. MEASUREMENT UNCERTAINTY	10
8. DESCRIPTION OF TESTS	11
9. SUMMARY OF TEST RESULTS	29
10. TEST RESULT	30
10.1 PEAK POWER	30
10.2 BAND EDGES	35
10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99 % BW)	41
10.4 NUMBER OF HOPPING FREQUENCY	49
10.5 TIME OF OCCUPANCY (DWELL TIME)	54
10.6 SPURIOUS EMISSIONS	60
10.6.1 CONDUCTED SPURIOUS EMISSIONS	60
10.6.2 RADIATED SPURIOUS EMISSIONS	73
10.6.3 RADIATED RESTRICTED BAND EDGES	96
10.7 POWERLINE CONDUCTED EMISSIONS	101
11. LIST OF TEST EQUIPMENT	102
12. ANNEX A_ TEST SETUP PHOTO	104

1. EUT DESCRIPTION

Model	SM-S931B/DS
Additional Model	SM-S931B
EUT Type	Mobile Phone
Power Supply	DC 3.88V
Frequency Range	2 402 MHz - 2 480 MHz
Max. RF Output Power	Ant.1 : 18.258 dBm (66.96 mW) Ant.2 : 16.586 dBm (45.56 mW) Dual Ant.1+ Ant.2 : 15.152 dBm (32.75 mW)
BT Operating Mode	Normal, EDR, AFH
Modulation Type	GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
Modulation Technique	FHSS
Number of Channels	79 Channels, Minimum 20 Channels(AFH)
Antenna Specification	Type: Metal ANT.1 Peak Gain: -2.43 dBi, ANT.2 Peak Gain: -4.74 dBi
Serial number	Radiated : R3CX80PTC3H Conducted : R3CX80PTC0K

ANTENNA CONFIGURATIONS

1. Below Tables are the possible configurations.

Configurations	SISO		Dual BT
	Ant1(Core-0)	Ant2(Core-1)	Ant1 & Ant2
Bluetooth	O	O	O

Note:

O = Support, X = Not Support

2. This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz or 6GHz Bands simultaneously on each antenna.

RSDB Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	BT Ant.1	BT Ant.2	Test Case
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on	-	-	-	-	Scenario1
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi ANT.1	-	on	on	-	-	-	on	-	-
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi ANT.2	-	on	-	on	-	-	on	-	Scenario2
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO	-	on	on	on	-	-	on	-	Scenario3

2. Requirements for Bluetooth transmitter(15.247)

This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:

- 1) This system is hopping pseudo-randomly.
- 2) Each frequency is used equally on the average by each transmitter.
- 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
- 4) The receiver shifts frequencies in synchronization with the transmitted signals.
 - 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
 - 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Device (ANSI C63.10-2013, KDB 558074) is used in the measurement of the test device.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013). To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120 kHz for frequencies below 1 GHz or 1 MHz for frequencies above 1 GHz. For average measurements above 1 GHz, the analyzer was set to peak detector and add the DCCF calculations.

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

8. DESCRIPTION OF TESTS


8.1. Conducted Maximum Peak Output Power

Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 W. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 W.
2. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

Test Configuration

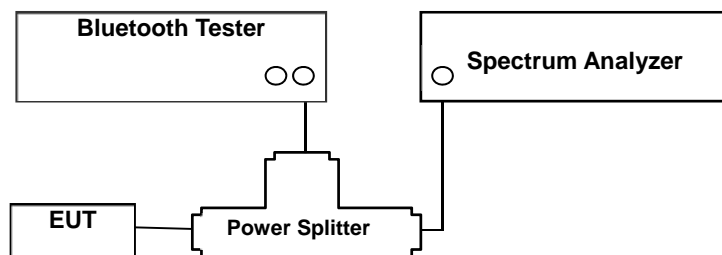

Test Procedure

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the peak detector mode. This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.5 in ANSI 63.10-2013& Procedure 9(b) in KDB 558074 v05r02)


- 1) Span: approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- 2) RBW > the 20 dB bandwidth of the emission being measured
- 3) VBW \geq RBW
- 4) Sweep = Auto
- 5) Detector = Peak
- 6) Trace = Max hold

8.2. Conducted Band Edge(Out of Band Emissions)

Limit

According to § 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Configuration

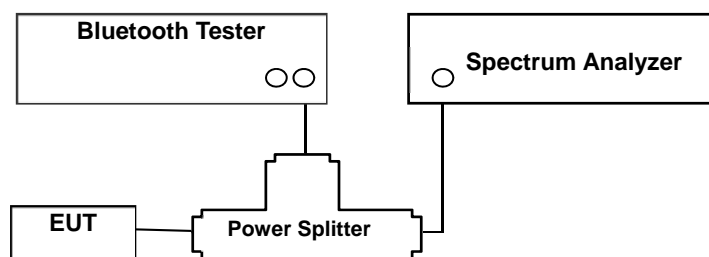

Test Procedure

This test is performed with hopping off and hopping on.

The Spectrum Analyzer is set to (6.10.4 in ANSI 63.10-2013& Procedure 8.5 and 8.6 in KDB 558074 v05r02)


- 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred).
- 4) Sweep time: Coupled.
- 5) RBW: 100 kHz
- 6) VBW: 300 kHz
- 7) Detector: Peak
- 8) Trace: Max hold

8.3. Frequency Separation & 20 dB Bandwidth

Limit

According to § 15.247(a)(1), Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Test Configuration

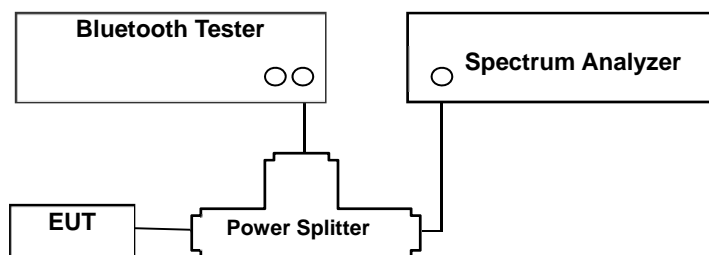

Test Procedure(Frequency Separation)

The Channel Separation test is performed with hopping on.

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.2 in ANSI 63.10-2013& Procedure 9(b) in KDB 558074 v05r02)

- 1) Span: Wide enough to capture the peaks of two adjacent channels
- 2) RBW: Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3) VBW \geq RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.
- 8) Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

Test Procedure (20 dB Bandwidth)

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (6.9.2 in ANSI 63.10-2013)


- 1) Span: Set between two times and five times the OBW
- 2) RBW: 1 % to 5 % of the OBW.
- 3) VBW $\geq 3 \times$ RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.

8.4. Number of Hopping Frequencies

Limit

According to § 15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands shall use at least 15 hopping frequencies.

Test Configuration

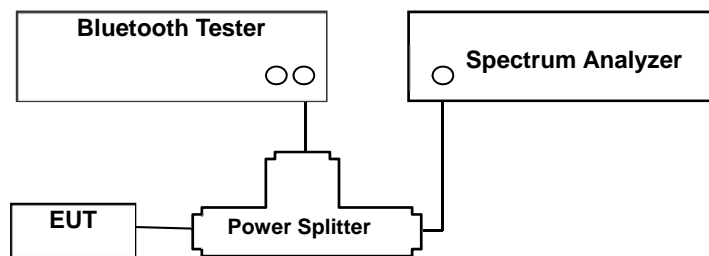

Test Procedure

The Bluetooth frequency hopping function of the EUT was enabled.

The Spectrum Analyzer is set to (7.8.3 in ANSI 63.10-2013& Procedure 9(b) in KDB 558074 v05r02)


- 1) Span: the frequency band of operation
- 2) RBW: To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3) VBW \geq RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) Allow the trace to stabilize.

8.5. Time of Occupancy

Limit

According to § 15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Test Configuration

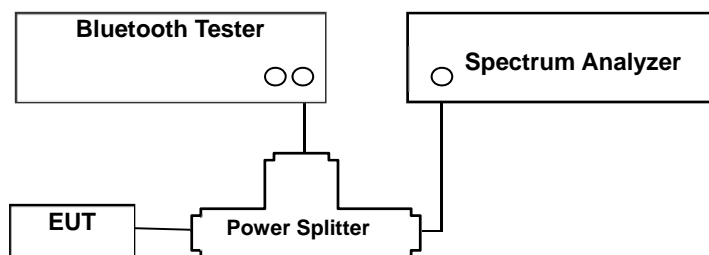

Test Procedure

This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.4 in ANSI 63.10-2013& Procedure 9(b) in KDB 558074 v05r02)

- 1) Span: Zero span, centered on a hopping channel
- 2) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- 3) Sweep = as necessary to capture the entire dwell time per hopping channel
- 4) Detector: Peak
- 5) Trace: Max hold

The marker-delta function was used to determine the dwell time.

Sample Calculation

The following calculation process is not relevant to our measurement results. It is just an example.

(1) Non-AFH Mode

- DH 5 (GFSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27$ (ms)
- 2-DH 5 ($\pi/4$ DQPSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27$ (ms)
- 3-DH 5 (8DPSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27$ (ms)

(2) AFH Mode

- DH 5 (GFSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13$ (ms)
- 2-DH 5 ($\pi/4$ DQPSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13$ (ms)
- 3-DH 5 (8DPSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13$ (ms)

Note :

DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving.

Then the system makes worst case 1600/6 hops per second with 79 channels. So the system have each channel 3.3755 times per second and so for 31.6 seconds the system have 106.667 times of appearance.

Each tx-time per appearance of DH5 is 2.890 ms.


Dwell time = Tx-time x 106.667 = 308.27 (ms)

8.6. Conducted Spurious Emissions

Limit

Conducted > 20 dBc

Test Configuration

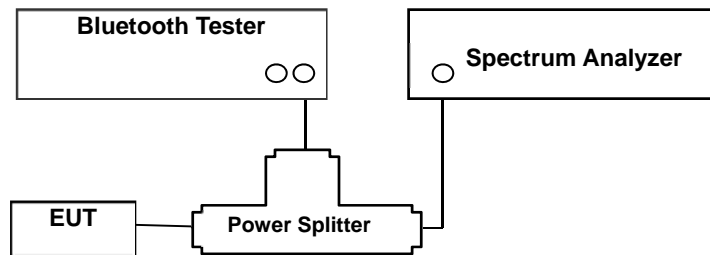

Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer.

The Spectrum Analyzer is set to (7.8.8 in ANSI 63.10-2013& Procedure 8.5 and 8.6 in KDB 558074 v05r02)

- 1) Span: 30 MHz to 10 times the operating frequency in GHz.
- 2) RBW: 100 kHz
- 3) VBW: 300 kHz
- 4) Sweep: Coupled
- 5) Detector: Peak

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

This test is performed with hopping off.

Factors for frequency

Freq(MHz)	ANT.1 Factor(dB)	ANT.2 Factor(dB)
30	6.64	6.64
100	6.81	6.81
200	6.88	6.88
300	6.95	6.95
400	7.07	7.07
500	7.07	7.07
600	7.07	7.07
700	7.08	7.08
800	7.12	7.12
900	7.16	7.16
1000	7.23	7.23
2000	7.59	7.59
2400	7.72	7.72
2500	7.72	7.72
3000	7.84	7.84
4000	7.95	7.95
5000	8.16	8.16
6000	8.19	8.19
7000	8.34	8.34
8000	8.44	8.44
9000	8.67	8.67
10000	8.78	8.78
11000	9.01	9.01
12000	9.12	9.12
13000	9.09	9.09
14000	9.20	9.20
15000	9.37	9.37
16000	9.41	9.41
17000	9.51	9.51
18000	9.60	9.60
19000	9.73	9.73
20000	9.85	9.85
21000	10.07	10.07
22000	10.12	10.12
23000	10.21	10.21
24000	10.33	10.33
25000	10.35	10.35
26000	10.86	10.86

Note :

1. 2400 ~ 2500 MHz is fundamental frequency range.


8.7. Radiated Test

Limit


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

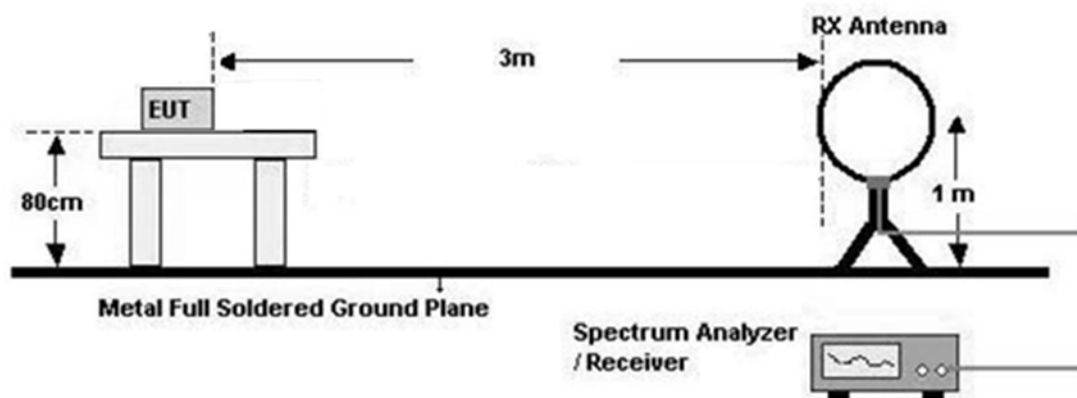

30 MHz - 1 GHz

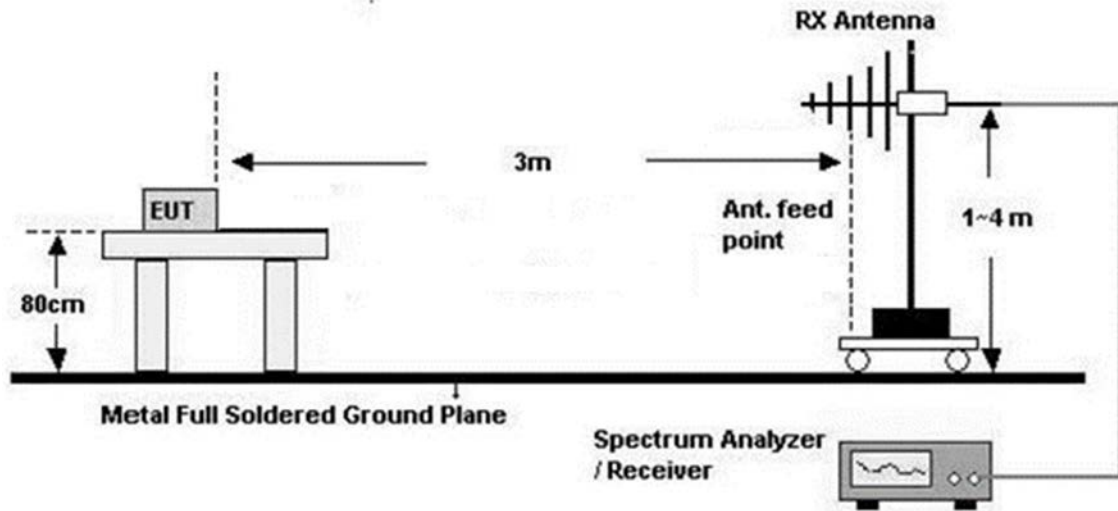

Above 1 GHz

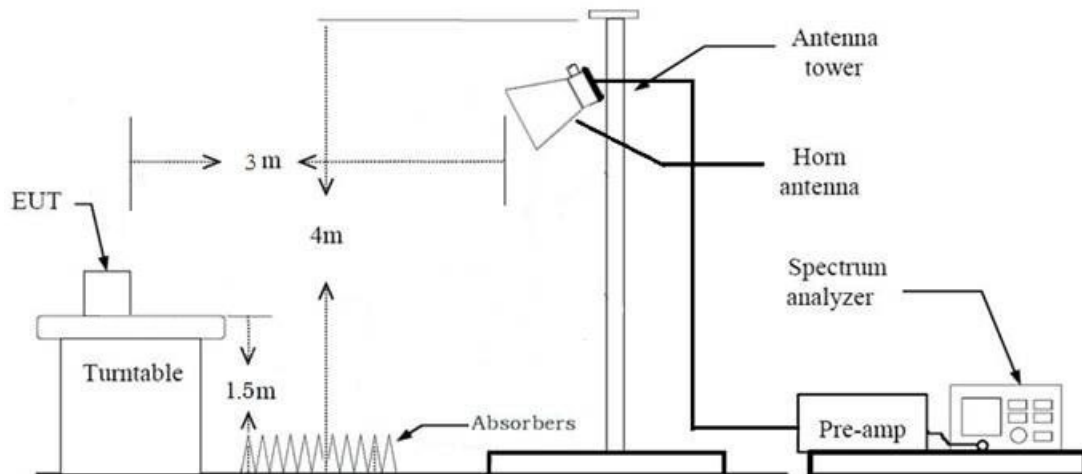

Test Procedure of Radiated spurious emissions(Below30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m

8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Max hold
- RBW = 9 kHz
- VBW $\geq 3 \times$ RBW

9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions

from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Max hold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average):
 - Average value of pulsed emissions
 - Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall determine from the peak field strength after correcting for the worst-case duty cycle as described in Number.14 (On Page. 23)
 - ◆ Duty Cycle Correction(AFH) = $20\log(\text{Worst Case Dwell Time} / 100\text{ms})$ dB = -24.7314 dB
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
11. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
12. Total(Measurement Type : Peak)
= Measured Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – Amp Gain(A.G)
Total(Measurement Type : Average)
= Measured Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) - Amp Gain(A.G) + D.C.C.F(AFH)

Test Procedure of Radiated Restricted Band Edge

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Detector = Peak
 - Trace = Max hold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average):
 - Average value of pulsed emissions
 - Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall determine from the peak field strength after correcting for the worst-case duty cycle as described in Number.14 (On Page. 23)
 - ◆ Duty Cycle Correction(AFH) = $20\log(\text{Worst Case Dwell Time} / 100\text{ms})$ dB = -24.7314 dB
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
11. Total(Measurement Type : Peak)
= Measured Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) + Attenuator(ATT) + Distance Factor(D.F)
- Amp Gain(A.G)

Total(Measurement Type : Average)
= Measured Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) + Attenuator(ATT) + Distance Factor(D.F)
- Amp Gain(A.G) + D.C.C.F(AFH)

8.8. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30MHz.
 - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
 - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

8.9. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone etc)
 - Worstcase : Stand alone
2. EUT Axis
 - (1) Ant.1
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : X
 - (2) Ant.2
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : Y
 - (3) Dual Ant.1+ Ant.2
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : Y
3. All data rate of operation were investigated and the test results are worst case in highest data rate of each mode.
 - GFSK : DH5
 - $\pi/4$ DQPSK : 2-DH5
 - 8DPSK : 3-DH5
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane
5. SM-S931B/DS, SM-S931B were tested and the worst case results are reported.
(Worst case : SM-S931B/DS)
6. Radiated Spurious Emission
 - All mode of operation were investigated and the worst case results are reported.
 - GFSK : DH5
 - $\pi/4$ DQPSK : 2-DH5
 - 8DPSK : 3-DH5

Radiated test(RSDB)

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone, Stand alone + External accessories(Earphone, Keyboard, etc)
- Worstcase : Stand alone

2. EUT Axis

- Radiated Spurious Emissions : Z

3. All of RSDB Scenario were investigated and the worst case configuration results are reported.

RSDB Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	BT Ant.1	BT Ant.2	Test Case
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on	-	-	-	-	Scenario1
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi ANT.1	-	on	on	-	-	-	on	-	-
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi ANT.2	-	on	-	on	-	-	on	-	Scenario2
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO	-	on	on	on	-	-	on	-	Scenario3

4. The RSDB mode test investigated both intermodulation and radiated spurious emissions.

And the worst results were reported.

- Worst result: Radiated spurious emissions
- Intermodulation: No signals are generated.
- Radiated spurious emissions: cf. Section 10.6.2.

5. The following tables show the worst case configurations determined during testing.

(Worst case: The lowest margin condition the channels and modes were selected for test.)

RSDB Scenario 2	Description	Bluetooth Emission	2.4GHz Emission	5 GHz Emission
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi ANT.2	Antenna	ANT1	ANT2	ANT2
	Channel	78	1	38
	Data Rate	3 Mbps	1 Mbps	MCS 0
	Mode	8DPSK	802.11b	802.11be(EHT40)
	Tone, RU	N/A	N/A	26T, 9 RU

Note : DTS, UNII ax, be RSDB Data refer to [DTS], [UNII ax, be] Test Report

RSDB Scenario 3	Description	Bluetooth Emission	2.4GHz Emission	5 GHz Emission
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO	Antenna	ANT1	ANT2	MIMO
	Channel	78	1	38
	Data Rate	3 Mbps	1 Mbps	MCS 0
	Mode	8DPSK	802.11b	802.11be(EHT40)
	Tone, RU	N/A	N/A	26T, 9 RU

Note : DTS, UNII ax, be RSDB Data refer to [DTS], [UNII ax, be] Test Report

6. SM-S931B/DS, SM-S931B were tested and the worst case results are reported.

(Worst case : SM-S931B/DS)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone+ External accessories(Earphone, etc)+Travel Adapter

Stand alone + Travel Adapter

- Worstcase : Stand alone + Travel Adapter

2. SM-S931B/DS, SM-S931B were tested and the worst case results are reported.

(Worst case : SM-S931B/DS)

Conducted test

1. The EUT was configured with data rate of highest power.

- GFSK : DH5

- $\pi/4$ DQPSK : 2-DH5

- 8DPSK : 3-DH5

2. AFH & Non-AFH were tested and the worst case results are reported.

(Worst case : Non-AFH)

3. SM-S931B/DS, SM-S931B were tested and the worst case results are reported.

(Worst case : SM-S931B/DS)

9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
20 dB Bandwidth	§ 15.247(a)(1)	N/A	Conducted	PASS
Occupied Bandwidth	N/A	N/A		N/A
Conducted Maximum Peak Output Power	§ 15.247(b)(1)	<0.125 W		PASS
Carrier Frequency Separation	§ 15.247(a)(1)	>25 kHz or >2/3 of the 20 dB BW		PASS
Number of Hopping Frequencies	§ 15.247(a)(1)(iii)	≥ 15		PASS
Time of Occupancy	§ 15.247(a)(1)(iii)	<400 ms		PASS
Conducted Spurious Emissions	§ 15.247(d)	> 20 dB for all out-of band emissions		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	> 20 dB for all out-of band emissions		PASS
AC Power line Conducted Emissions	§ 15.207(a)	cf. Section 8.8		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 8.7	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 8.7		PASS

Note: Average Power data refer to SAR report

10. TEST RESULT

10.1 PEAK POWER

[Ant.1]

Channel	Frequency (MHz)	Output Power (GFSK)		Limit (mW)
		(dBm)	(mW)	
Ch. 0	2402	18.240	66.68	125
Ch. 39	2441	18.258	66.96	
Ch. 78	2480	17.326	54.03	

Channel	Frequency (MHz)	Output Power (8DPSK)		Limit (mW)
		(dBm)	(mW)	
Ch. 0	2402	17.360	54.45	125
Ch. 39	2441	17.772	59.87	
Ch. 78	2480	16.723	47.02	

Channel	Frequency (MHz)	Output Power ($\pi/4$ DQPSK)		Limit (mW)
		(dBm)	(mW)	
Ch. 0	2402	16.802	47.89	125
Ch. 39	2441	17.164	52.05	
Ch. 78	2480	16.191	41.60	

[Ant.2]

Channel	Frequency (MHz)	Output Power (GFSK)		Limit (mW)
		(dBm)	(mW)	
Ch. 0	2402	16.524	44.92	125
Ch. 39	2441	16.586	45.56	
Ch. 78	2480	16.013	39.93	

Channel	Frequency (MHz)	Output Power (8DPSK)		Limit (mW)
		(dBm)	(mW)	
Ch. 0	2402	15.765	37.71	125
Ch. 39	2441	15.716	37.29	
Ch. 78	2480	15.367	34.41	

Channel	Frequency (MHz)	Output Power ($\pi/4$ DQPSK)		Limit (mW)
		(dBm)	(mW)	
Ch. 0	2402	15.156	32.78	125
Ch. 39	2441	15.214	33.22	
Ch. 78	2480	14.899	30.90	

[Dual Ant.1 + Ant. 2]

Channel	Frequency (MHz)	Output Power (GFSK)						Limit (mW)
		Dual Ant.1		Dual Ant.2		Dual(Ant.1 + Ant.2)		
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	
Ch. 0	2402	12.272	16.87	11.498	14.12	14.913	30.99	125
Ch. 39	2441	11.895	15.47	11.889	15.45	14.902	30.92	
Ch. 78	2480	12.530	17.91	11.480	14.06	15.047	31.97	

Channel	Frequency (MHz)	Output Power (8DPSK)						Limit (mW)
		Dual Ant.1		Dual Ant.2		Dual(Ant.1 + Ant.2)		
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	
Ch. 0	2402	12.414	17.43	11.126	12.96	14.828	30.39	125
Ch. 39	2441	12.601	18.20	11.628	14.55	15.152	32.75	
Ch. 78	2480	12.264	16.84	10.757	11.90	14.586	28.75	


Channel	Frequency (MHz)	Output Power ($\pi/4$ DQPSK)						Limit (mW)
		Dual Ant.1		Dual Ant.2		Dual(Ant.1 + Ant.2)		
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	
Ch. 0	2402	12.110	16.26	11.100	12.88	14.645	29.14	125
Ch. 39	2441	12.278	16.90	11.538	14.25	14.934	31.15	
Ch. 78	2480	11.635	14.57	10.269	10.64	14.016	25.21	

TEST PLOTS(Peak Power)


Note :

In order to simplify the report, attached plots were only the worst case channel.

ANT.1 GFSK : Peak Power (Ch. 39)

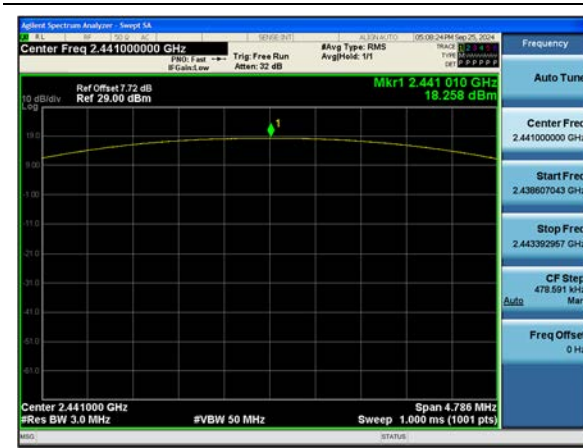

ANT.2 GFSK : Peak Power (Ch. 39)

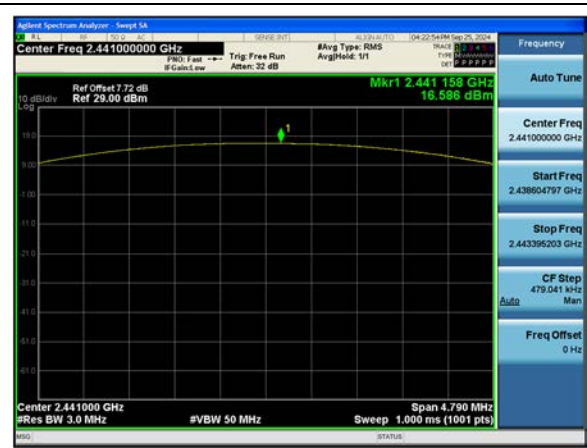

ANT.1 8DPSK : Peak Power (Ch. 39)




ANT.2 8DPSK : Peak Power (Ch. 0)



ANT.1 $\pi/4$ DQPSK : Peak Power (Ch. 39)




ANT.2 $\pi/4$ DQPSK : Peak Power (Ch. 39)

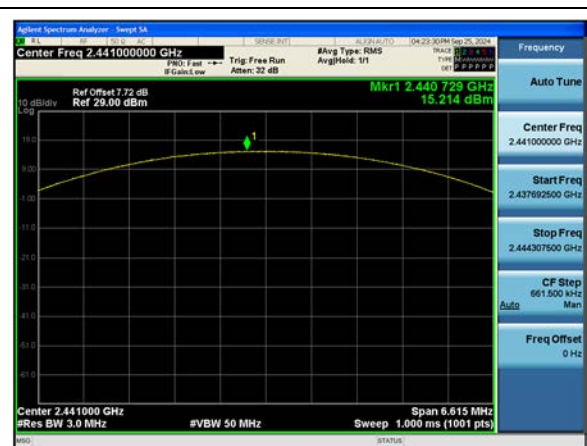


[Dual ANT]


Dual ANT.1 GFSK : Peak Power (Ch. 78)

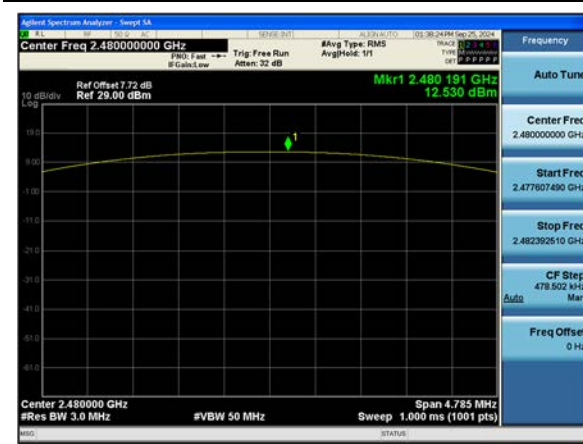

Dual ANT.2 GFSK : Peak Power (Ch. 78)

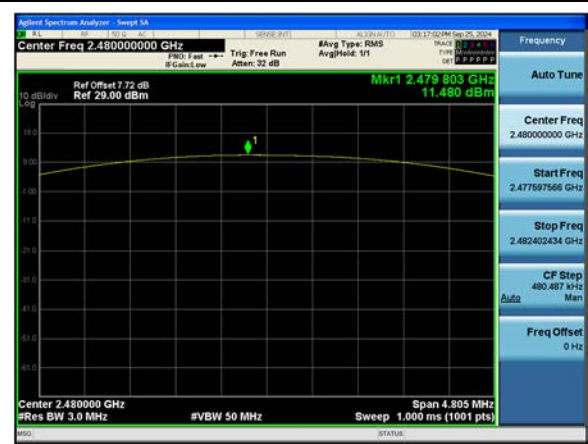

Dual ANT.1 8DPSK : Peak Power (Ch. 39)

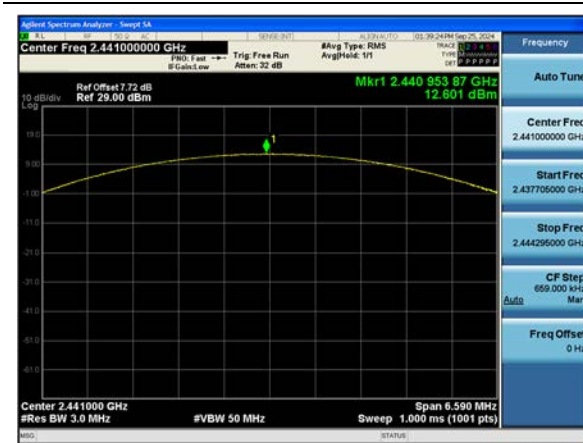


Dual ANT.2 8DPSK : Peak Power (Ch. 39)



Dual ANT.1 π /4DQPSK : Peak Power (Ch. 39)



Dual ANT.2 π /4DQPSK : Peak Power (Ch. 39)

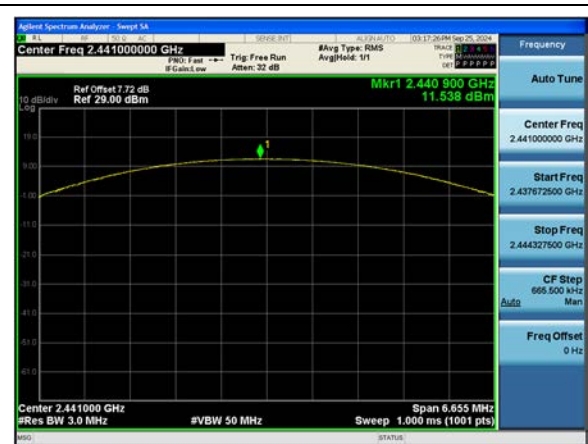

10.2 BAND EDGES

[Ant. 1]

Without hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	61.065	57.081	57.049	20
Upper	69.820	67.378	65.686	

With hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	63.340	60.539	57.940	20
Upper	73.103	67.920	67.502	

[Ant. 2]

Without hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	57.013	58.476	56.916	20
Upper	66.904	65.444	64.871	

With hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	60.442	62.173	63.436	20
Upper	70.407	66.490	66.170	

[Dual Ant. 1]
Without hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	59.009	50.272	51.212	20
Upper	65.790	56.024	58.599	

With hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	65.360	51.959	48.545	20
Upper	66.929	57.328	51.729	

[Dual Ant. 2]
Without hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	50.200	35.253	35.678	20
Upper	67.224	53.401	54.260	

With hopping


Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	50.264	35.428	36.275	20
Upper	66.338	43.917	47.418	

TEST PLOTS(BAND EDGES)

Note :

In order to simplify the report, attached plots were only the worst case mode.


-Without hopping

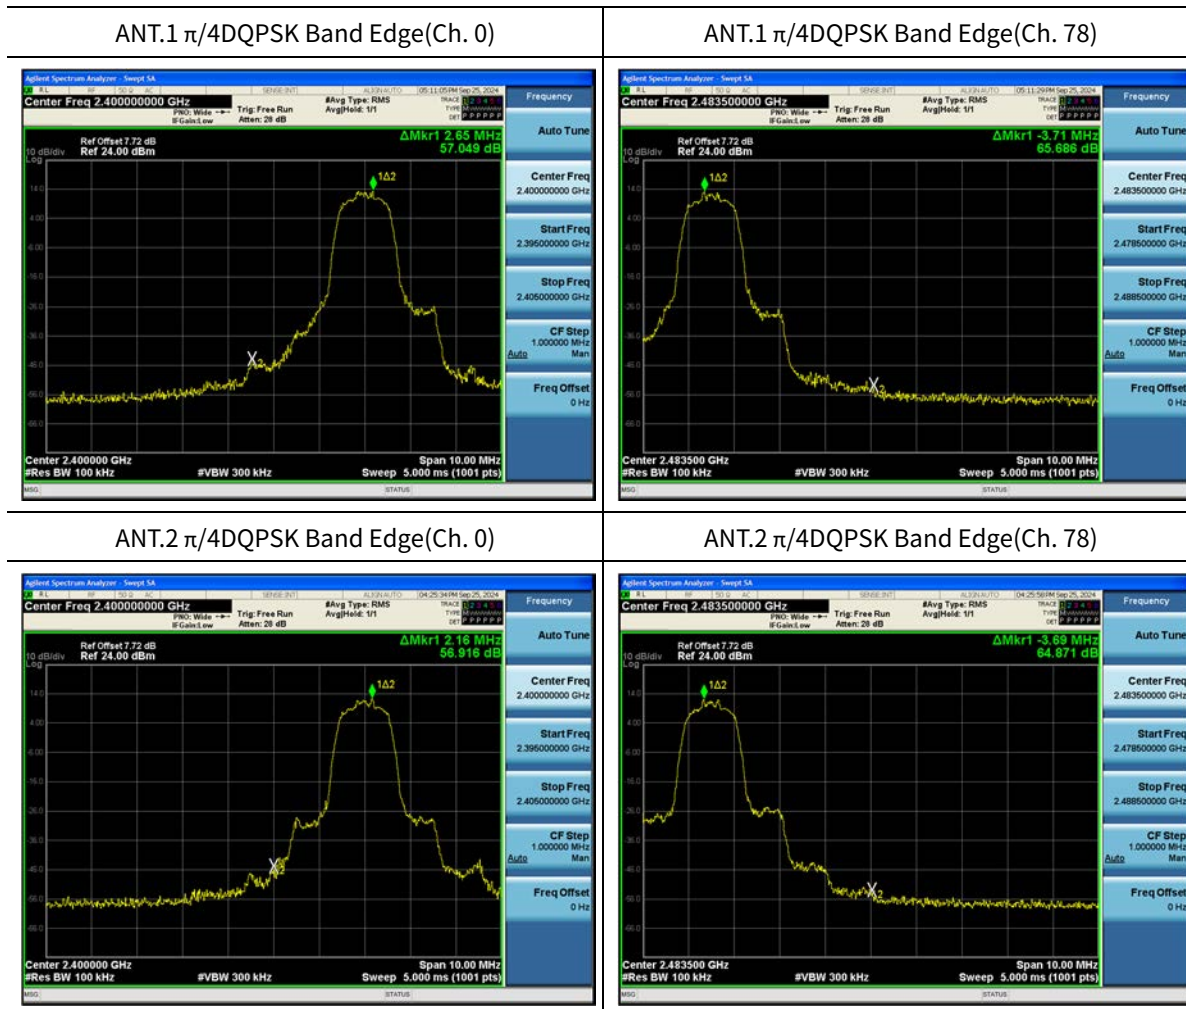

Dual ANT.1 8DPSK Band Edge(Ch. 0)



Dual ANT.1 8DPSK Band Edge(Ch. 78)

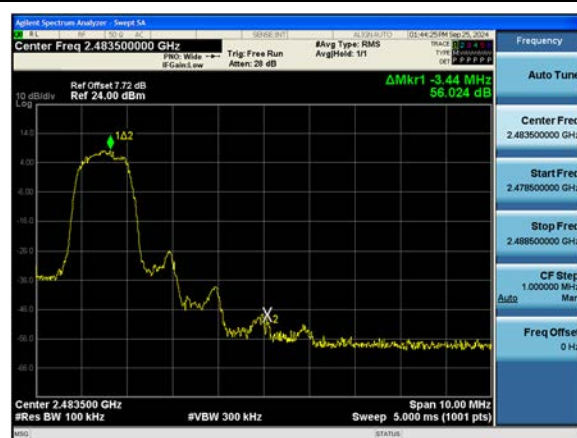


Dual ANT.2 8DPSK Band Edge(Ch. 0)




Dual ANT.2 8DPSK Band Edge(Ch. 78)



-With hopping

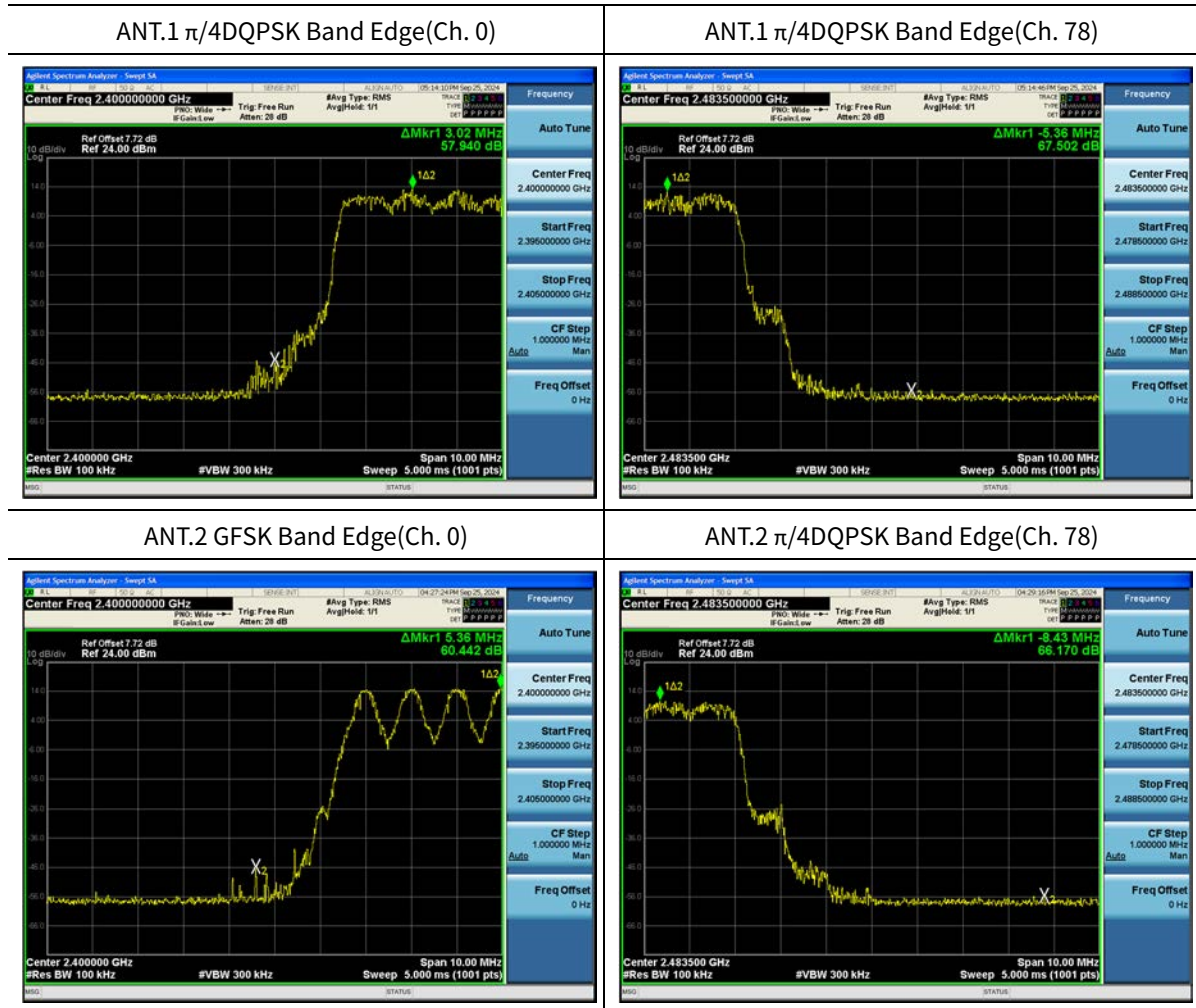

Dual ANT.1 π /4QPSK Band Edge(Ch. 0)

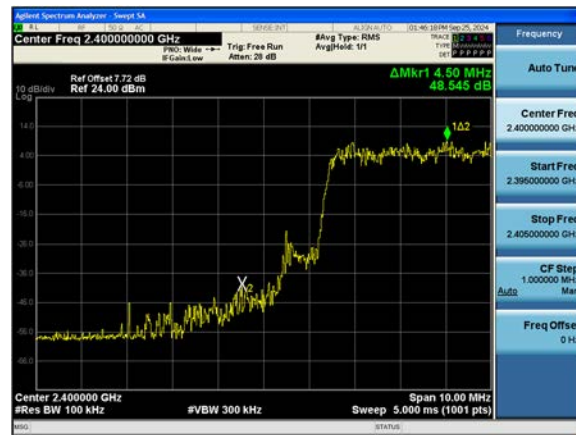


Dual ANT.1 π /4QPSK Band Edge(Ch. 78)



Dual ANT.2 8DPSK Band Edge(Ch. 0)



Dual ANT.2 8DPSK Band Edge(Ch. 78)

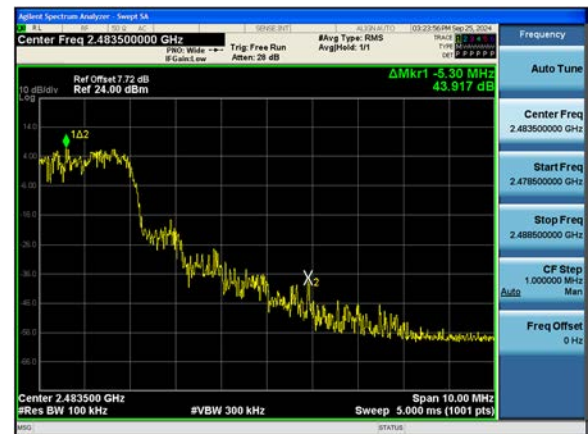

10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99 % BW)

[Ant.1]

99% BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Ch. 0	856.72	1182.3	1176.9
Ch. 39	854.84	1182.1	1175.0
Ch. 78	849.25	1182.0	1177.8

20dB Bandwidth (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Ch. 0	953.7	1315	1325
Ch. 39	957.2	1317	1323
Ch. 78	956.4	1312	1328

Channel Separation (kHz)			Limit (kHz)
GFSK	8DPSK	$\pi/4$ DQPSK	
998	991	994	>25 kHz or >2/3 of the 20 dB BW

[Ant.2]

99% BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Ch. 0	859.01	1185.2	1176.4
Ch. 39	853.23	1183.8	1176.6
Ch. 78	854.45	1187.0	1179.7

20dB Bandwidth (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Ch. 0	957.9	1313	1326
Ch. 39	958.1	1313	1323
Ch. 78	957.6	1312	1330

Channel Separation (kHz)			Limit (kHz)
GFSK	8DPSK	$\pi/4$ DQPSK	
998	961	1008	>25 kHz or >2/3 of the 20 dB BW

[Dual Ant.1]

99% BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Ch. 0	854.68	1191.5	1187.8
Ch. 39	852.21	1206.4	1195.7
Ch. 78	850.15	1184.8	1178.9

20dB Bandwidth (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Ch. 0	961.1	1315	1327
Ch. 39	958.1	1318	1330
Ch. 78	957.0	1313	1323

Channel Separation (kHz)			Limit (kHz)
GFSK	8DPSK	$\pi/4$ DQPSK	
998	1004	1001	>25 kHz or >2/3 of the 20 dB BW

[Dual Ant.2]

99% BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Ch. 0	858.40	1226.2	1221.2
Ch. 39	858.83	1213.4	1210.3
Ch. 78	856.22	1188.9	1181.7

20dB Bandwidth (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Ch. 0	962.9	1321	1351
Ch. 39	954.8	1325	1331
Ch. 78	961.0	1312	1325


Channel Separation (kHz)			Limit (kHz)
GFSK	8DPSK	$\pi/4$ DQPSK	
954	971	1001	>25 kHz or >2/3 of the 20 dB BW

TEST PLOTS(20 dB Bandwidth & 99% OBW)

Note:

In order to simplify the report, attached plots were only the widest 20 dB BW channel.


ANT. 1 GFSK 20 dB BW & 99% OBW (Ch. 39)

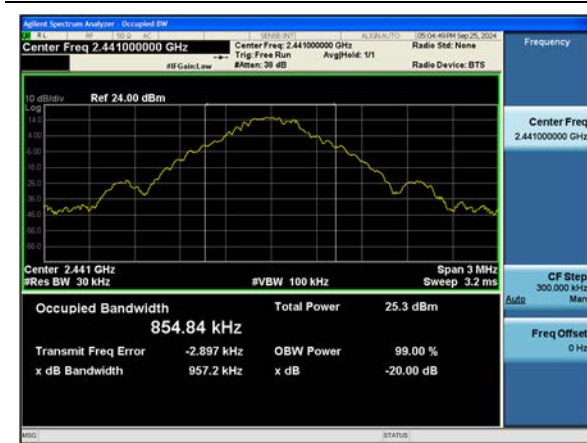

ANT. 2 GFSK 20 dB BW & 99% OBW (Ch. 39)




ANT. 1 8DPSK 20 dB BW & 99% OBW (Ch. 39)

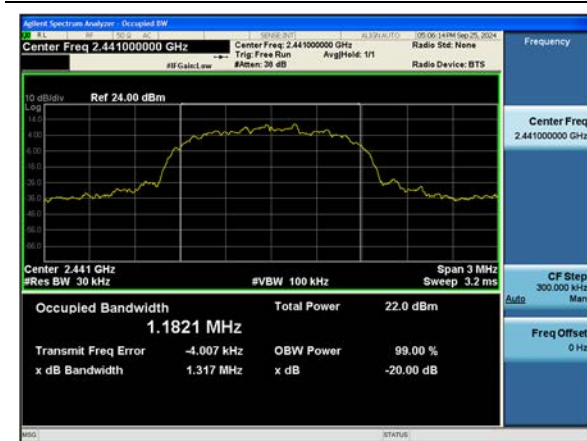

ANT. 2 8DPSK 20 dB BW & 99% OBW (Ch. 80)



ANT. 1 $\pi/4$ DQPSK 20 dB BW & 99% OBW (Ch. 78)

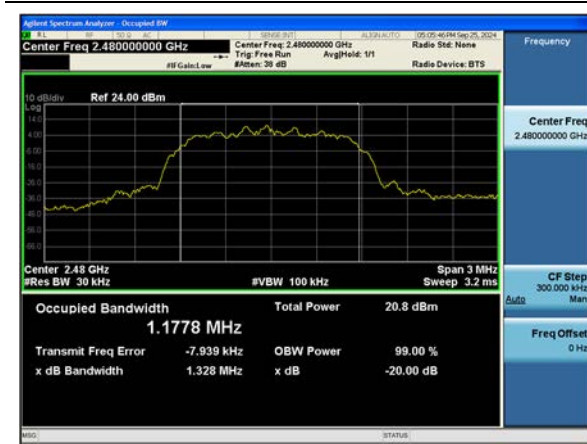

ANT. 2 $\pi/4$ DQPSK 20 dB BW & 99% OBW (Ch. 78)



Dual ANT. 1 GFSK 20 dB BW & 99% OBW (Ch. 0)




Dual ANT. 2 GFSK 20 dB BW & 99% OBW (Ch. 0)



Dual ANT. 1 8DPSK 20 dB BW & 99% OBW (Ch. 39)



Dual ANT. 2 8DPSK 20 dB BW & 99% OBW (Ch. 39)

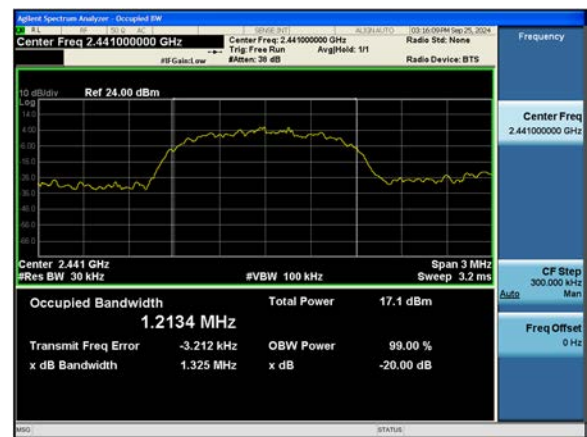

Dual ANT. 1 $\pi/4$ DQPSK 20 dB BW & 99% OBW (Ch. 39)



Dual ANT. 2 $\pi/4$ DQPSK 20 dB BW & 99% OBW (Ch. 0)



TEST PLOTS(Channel Separation)

ANT. 1 GFSK : Channel Separation



ANT. 2 GFSK : Channel Separation




ANT. 1 8DPSK : Channel Separation




ANT. 2 8DPSK : Channel Separation



ANT. 1 $\pi/4$ DQPSK : Channel Separation

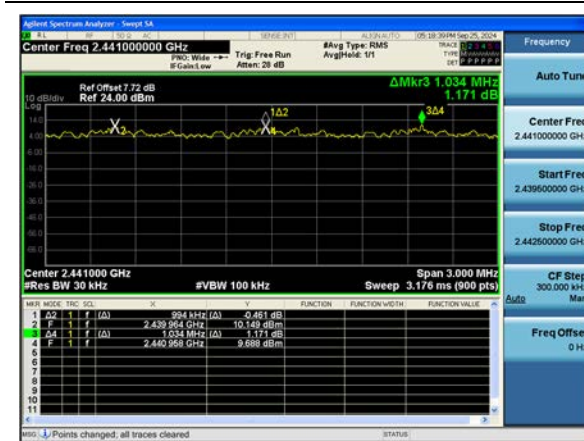

ANT. 2 $\pi/4$ DQPSK : Channel Separation

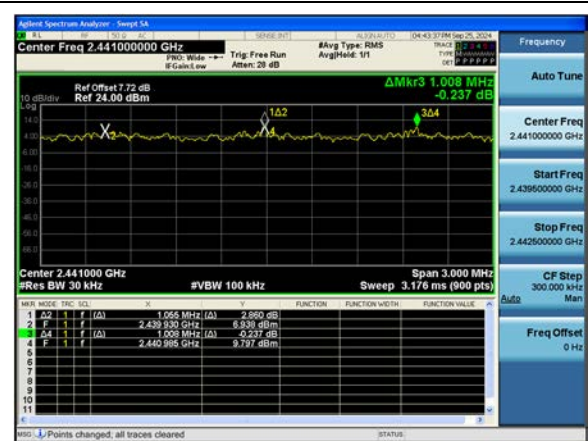


Dual ANT. 1 GFSK : Channel Separation




Dual ANT. 2 GFSK : Channel Separation




Dual ANT. 1 8DPSK : Channel Separation

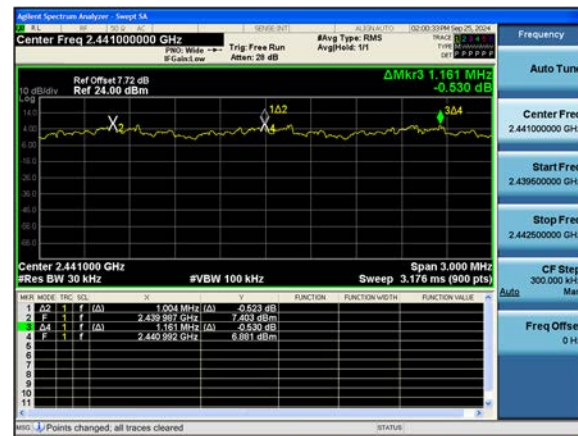


Dual ANT. 2 8DPSK : Channel Separation

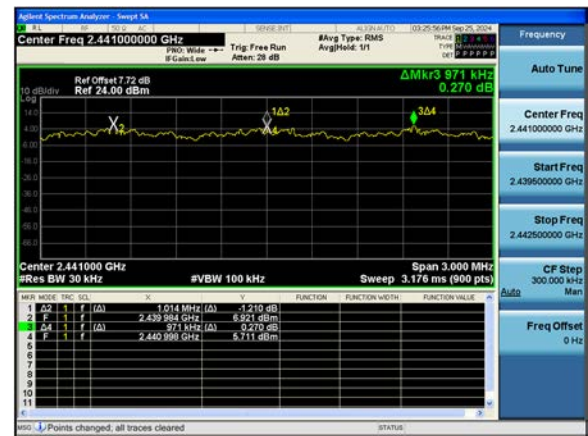

Dual ANT. 1 π /4DQPSK : Channel Separation

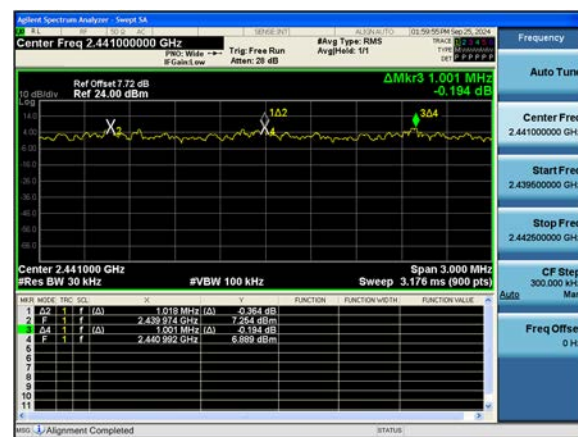

Dual ANT. 2 π /4DQPSK : Channel Separation

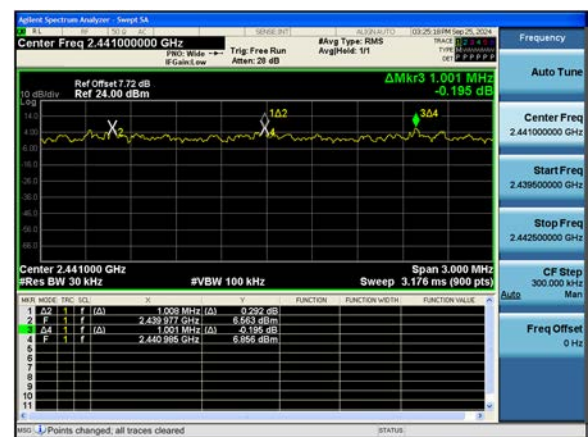

10.4 NUMBER OF HOPPING FREQUENCY

[Ant.1]

Result (No. of CH)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	
79	79	79	>15

[Ant.2]

Result (No. of CH)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	
79	79	79	>15

[Dual Ant.1]

Result (No. of CH)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	
79	79	79	>15

[Dual Ant.2]

Result (No. of CH)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	
79	79	79	>15

Note :

In case of AFH mode, minimum number of hopping channels is 20.


■ TEST PLOTS(NUMBER OF HOPPING FREQUENCY)

[ANT.1]


ANT.1 GFSK (2.4 GHz - 2.441 GHz)




ANT.1 GFSK (2.441 GHz - 2.483.5 GHz)

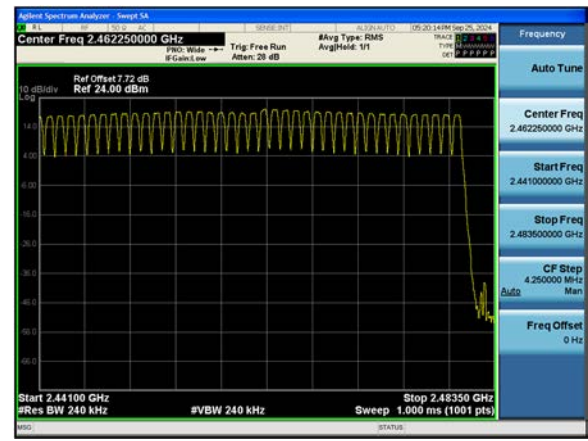


ANT.1 8DPSK (2.4 GHz - 2.441 GHz)

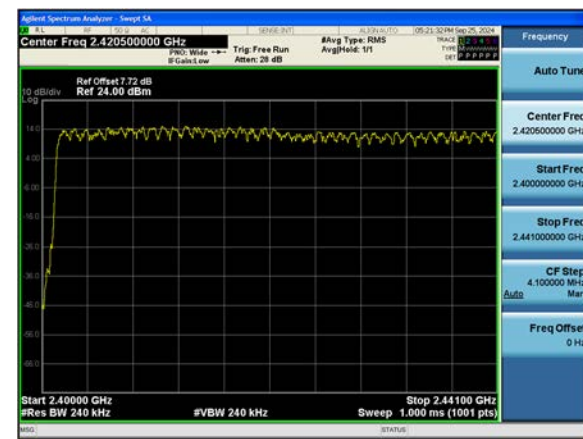


ANT.1 8DPSK (2.441 GHz - 2.483.5 GHz)

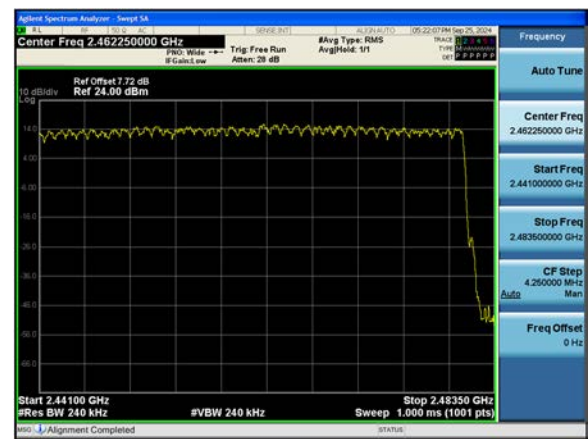

ANT.1 $\pi/4$ DQPSK (2.4 GHz - 2.441 GHz)

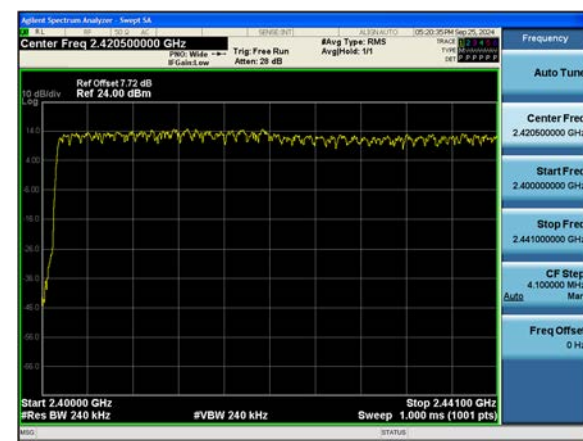


ANT.1 $\pi/4$ DQPSK (2.441 GHz - 2.483.5 GHz)

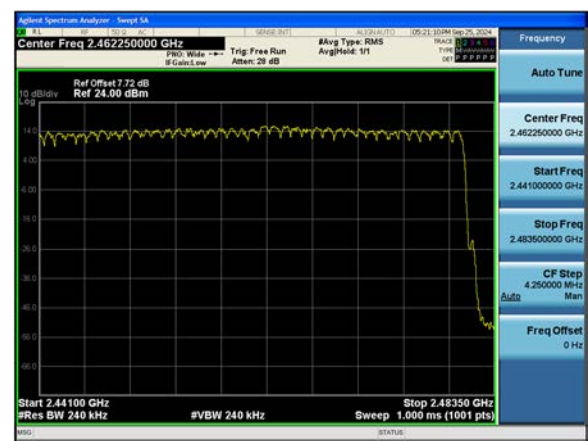


[ANT.2]


ANT.2 GFSK (2.4 GHz - 2.441 GHz)

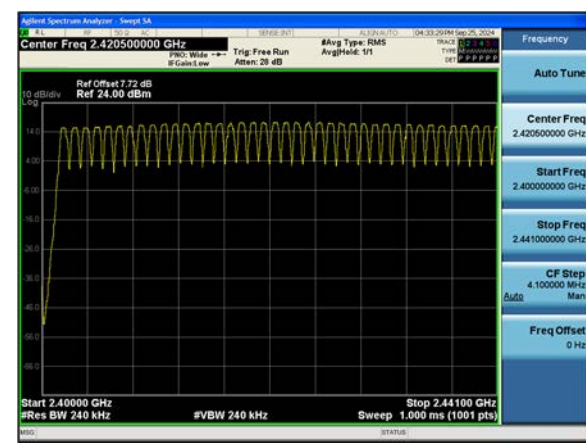


ANT.2 GFSK (2.441 GHz - 2.483.5 GHz)

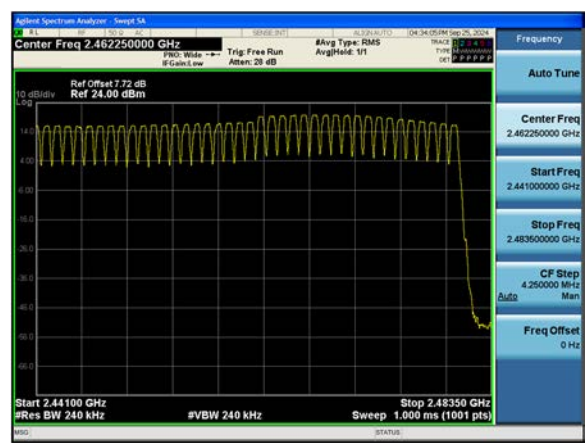


ANT.2 8DPSK (2.4 GHz - 2.441 GHz)

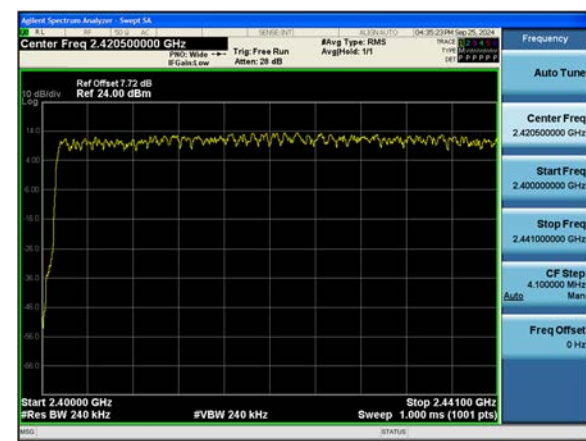


ANT.2 8DPSK (2.441 GHz - 2.483.5 GHz)

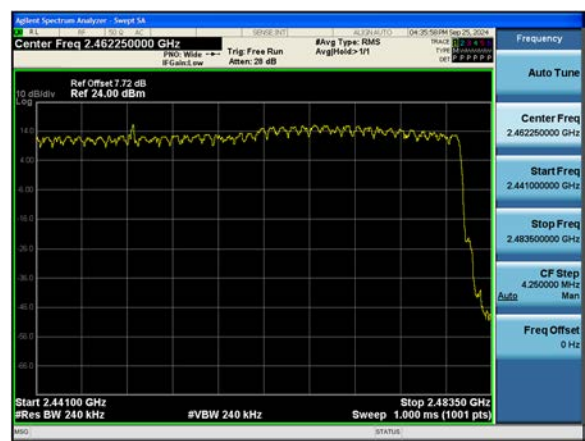

ANT.2 π /4DQPSK (2.4 GHz - 2.441 GHz)

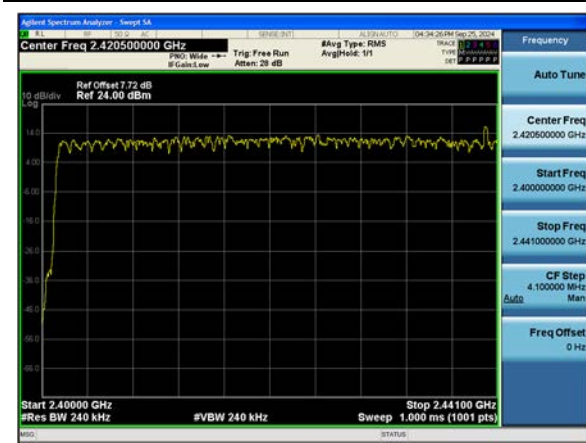


ANT.2 π /4DQPSK (2.441 GHz - 2.483.5 GHz)

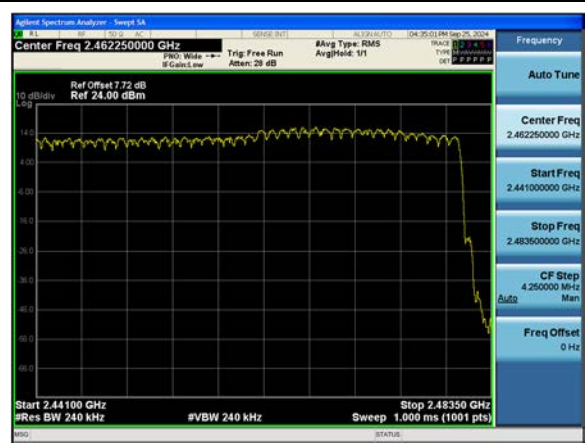

[Dual ANT.1]


Dual ANT.1 GFSK (2.4 GHz - 2.441 GHz)

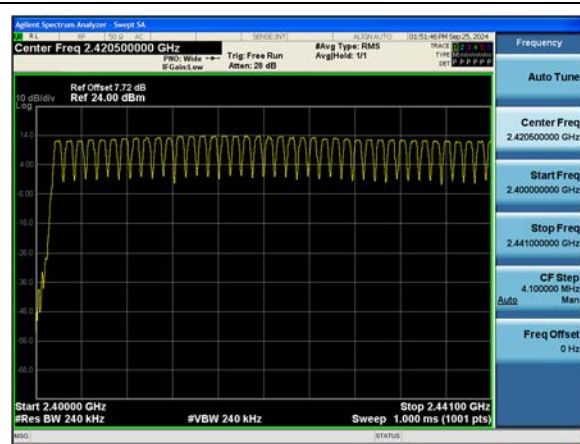


Dual ANT.1 GFSK (2.441 GHz - 2.483.5 GHz)




Dual ANT.1 8DPSK (2.4 GHz - 2.441 GHz)

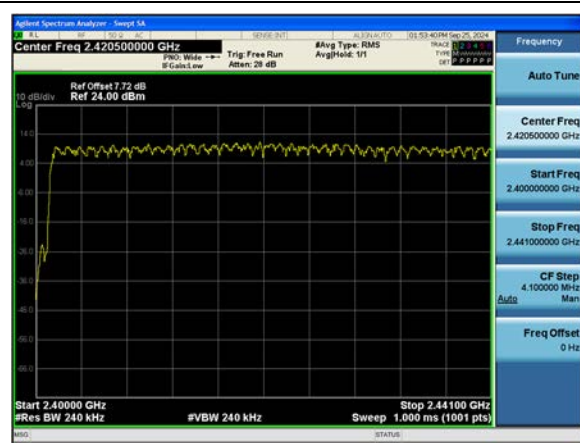


Dual ANT.1 8DPSK (2.441 GHz - 2.483.5 GHz)

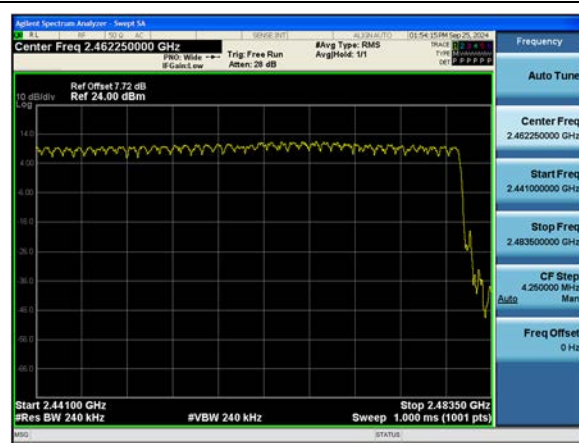

Dual ANT.1 π /4DQPSK (2.4 GHz - 2.441 GHz)

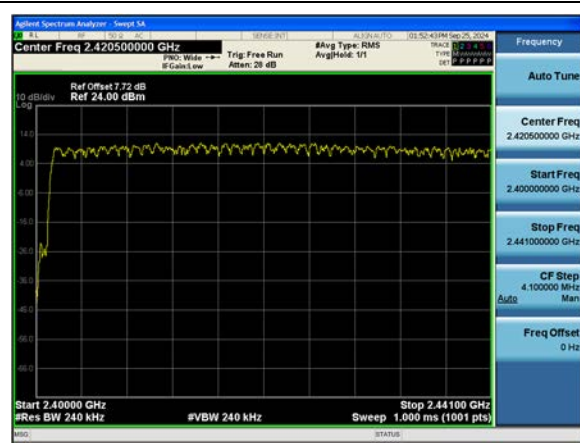


Dual ANT.1 π /4DQPSK (2.441 GHz - 2.483.5 GHz)

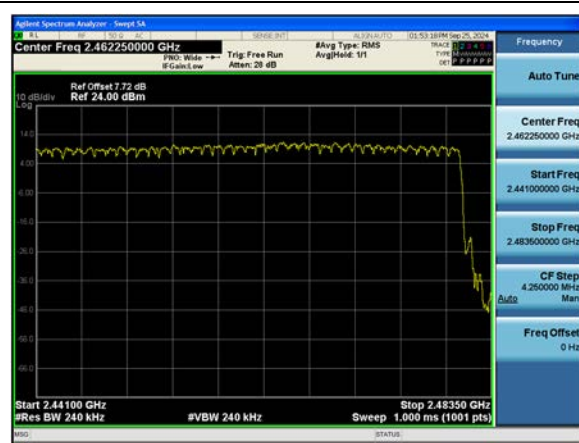


[Dual ANT.2]


Dual ANT.2 GFSK (2.4 GHz - 2.441 GHz)

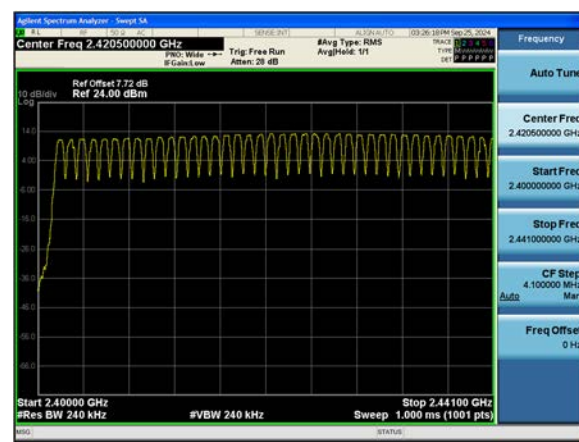


Dual ANT.2 GFSK (2.441 GHz - 2.483.5 GHz)

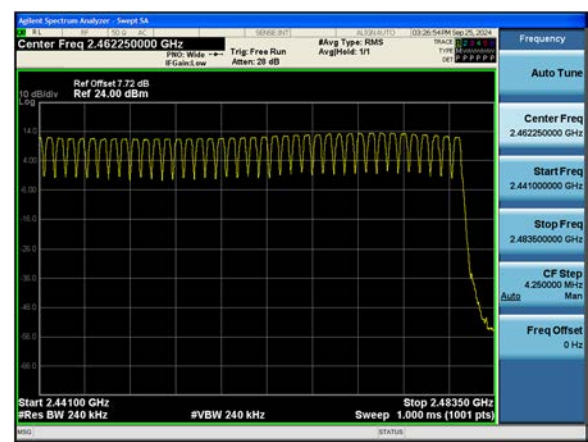


Dual ANT.2 8DPSK (2.4 GHz - 2.441 GHz)

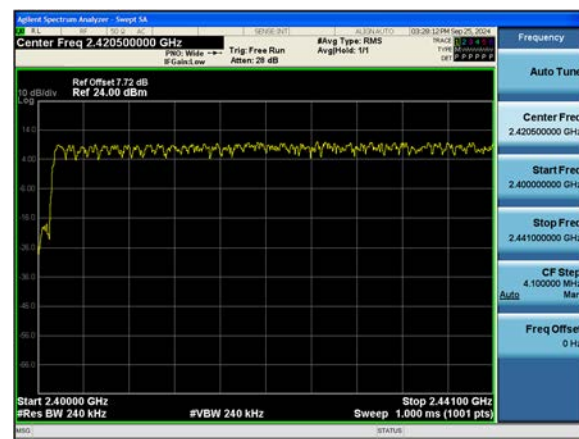


Dual ANT.2 8DPSK (2.441 GHz - 2.483.5 GHz)

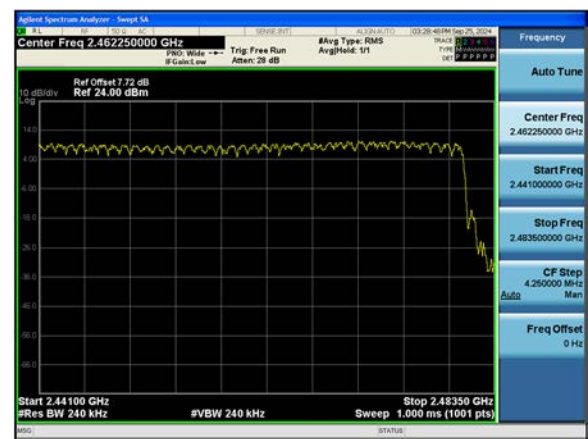

Dual ANT.2 π /4DQPSK (2.4 GHz - 2.441 GHz)

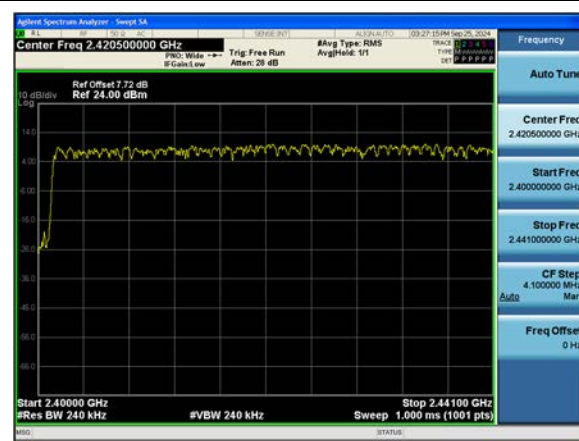

Dual ANT.2 π /4DQPSK (2.441 GHz - 2.483.5 GHz)

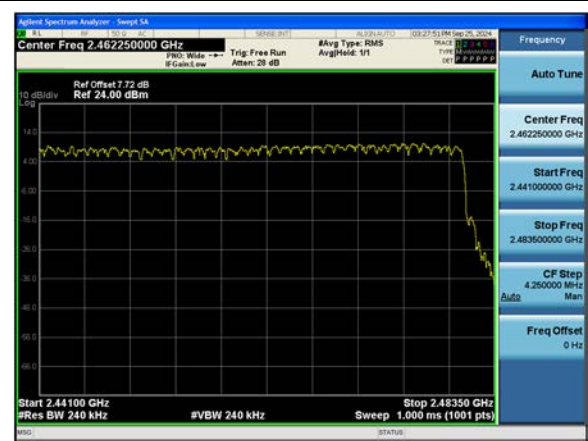

10.5 TIME OF OCCUPANCY (DWELL TIME)

[Ant.1]

Pulse Time (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
	Ch. 0	2.890	2.890	2.890
	Ch. 39	2.890	2.895	2.890
	Ch. 78	2.890	2.890	2.890

Non-AFH Mode

Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Ch. 0	308.27	308.27	308.27	31.6	400
	Ch. 39	308.27	308.80	308.27	31.6	
	Ch. 78	308.27	308.27	308.27	31.6	

AFH Mode

Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Ch. 0	154.13	154.13	154.13	8	400
	Ch. 39	154.13	154.40	154.13	8	
	Ch. 78	154.13	154.13	154.13	8	

[Ant.2]

Pulse Time (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
	Ch. 0	2.885	2.890	2.885
	Ch. 39	2.890	2.890	2.890
	Ch. 78	2.890	2.890	2.890

Non-AFH Mode

Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Ch. 0	307.73	308.27	307.73	31.6	400
	Ch. 39	308.27	308.27	308.27	31.6	
	Ch. 78	308.27	308.27	308.27	31.6	

AFH Mode

Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Ch. 0	153.87	154.13	153.87	8	400
	Ch. 39	154.13	154.13	154.13	8	
	Ch. 78	154.13	154.13	154.13	8	

[Dual Ant.1]

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Pulse Time (ms)	Ch. 0	2.890	2.890	2.890
	Ch. 39	2.890	2.895	2.890
	Ch. 78	2.890	2.890	2.890

Non-AFH Mode

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
Total of Dwell (ms)	Ch. 0	308.27	308.27	308.27	31.6	400
	Ch. 39	308.27	308.80	308.27	31.6	
	Ch. 78	308.27	308.27	308.27	31.6	

AFH Mode

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
Total of Dwell (ms)	Ch. 0	154.13	154.13	154.13	8	400
	Ch. 39	154.13	154.40	154.13	8	
	Ch. 78	154.13	154.13	154.13	8	

[Dual Ant.2]

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Pulse Time (ms)	Ch. 0	2.890	2.890	2.890
	Ch. 39	2.890	2.895	2.885
	Ch. 78	2.890	2.890	2.885

Non-AFH Mode

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
Total of Dwell (ms)	Ch. 0	308.27	308.27	308.27	31.6	400
	Ch. 39	308.27	308.80	307.73	31.6	
	Ch. 78	308.27	308.27	307.73	31.6	

AFH Mode


	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
Total of Dwell (ms)	Ch. 0	154.13	154.13	154.13	8	400
	Ch. 39	154.13	154.40	153.87	8	
	Ch. 78	154.13	154.13	153.87	8	

TEST PLOTS(Dwell Time)


Note:

In order to simplify the report, attached plots were only the lowest channel.


ANT.1 GFSK : Dwell Time(Ch. 0)

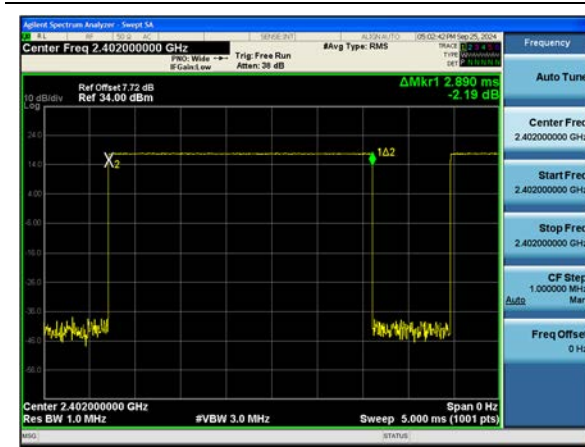




ANT.2 GFSK : Dwell Time(Ch. 0)

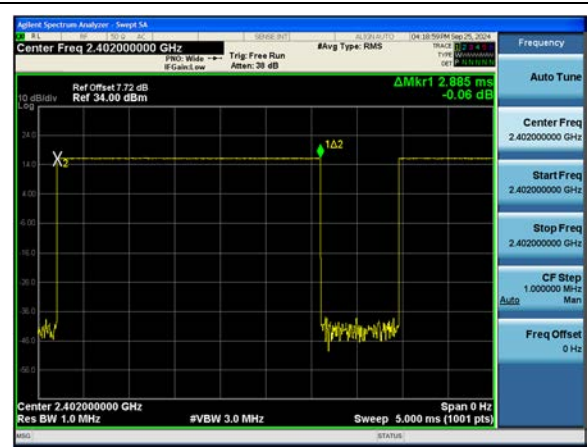


ANT.1 8DPSK : Dwell Time(Ch. 0)

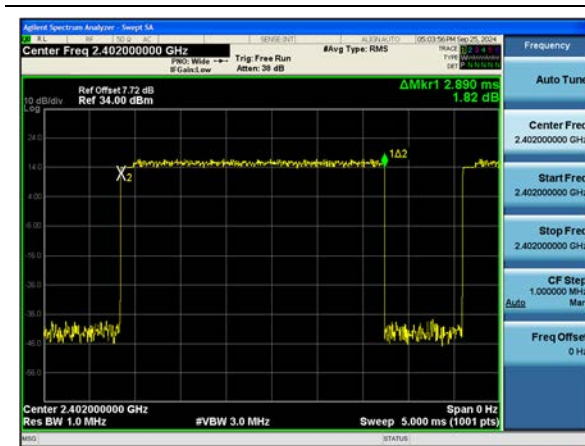

ANT.2 8DPSK : Dwell Time(Ch. 0)

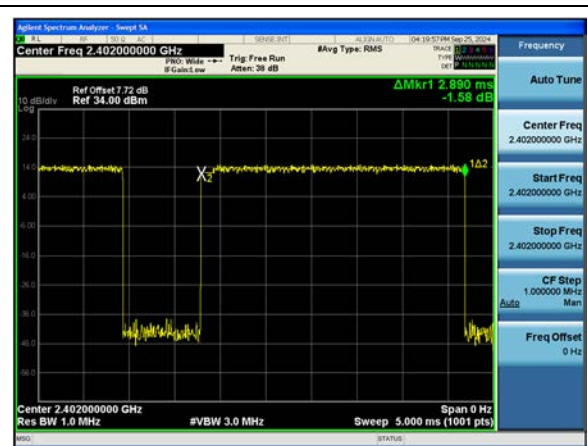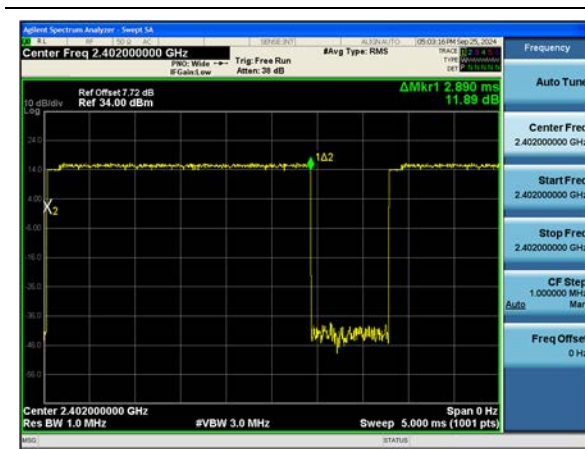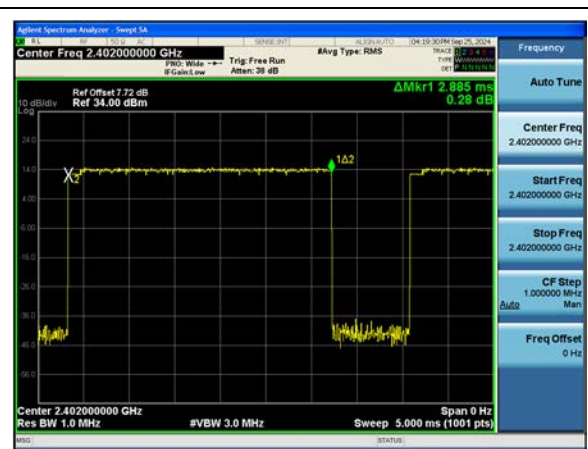
ANT.1 $\pi/4$ DQPSK : Dwell Time(Ch. 0)

ANT.2 $\pi/4$ DQPSK : Dwell Time(Ch. 0)

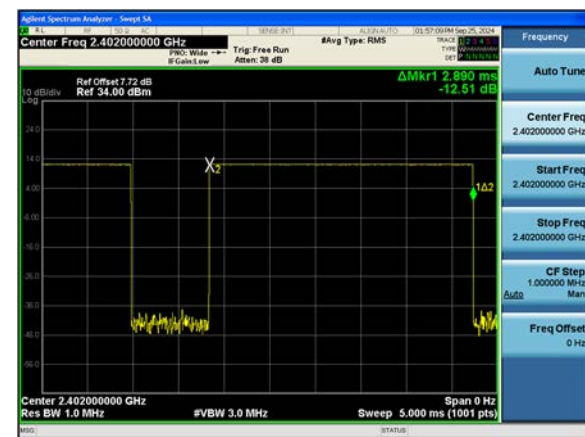
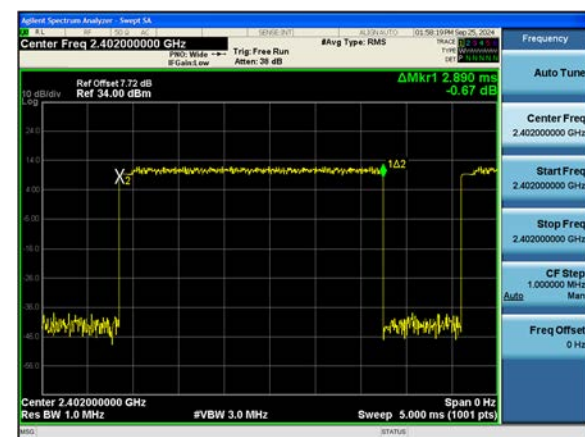
Dual ANT.1 GFSK : Dwell Time(Ch. 0)




Dual ANT.2 GFSK : Dwell Time(Ch. 0)




Dual ANT.1 8DPSK : Dwell Time(Ch. 0)




Dual ANT.2 8DPSK : Dwell Time(Ch. 0)

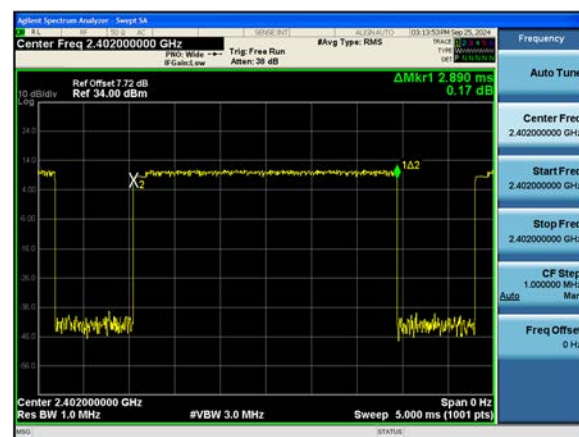

Dual ANT.1 $\pi/4$ DQPSK : Dwell Time(Ch. 0)

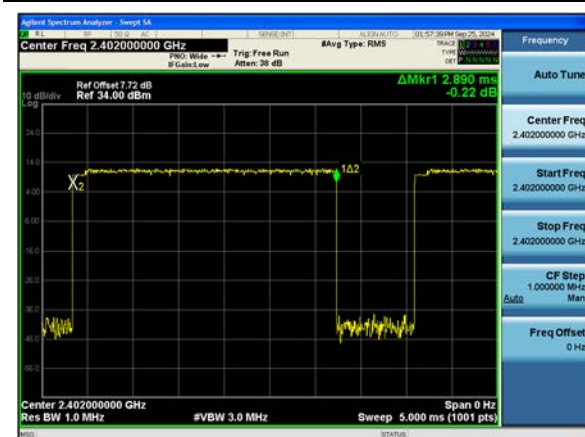

Dual ANT.2 $\pi/4$ DQPSK : Dwell Time(Ch. 0)

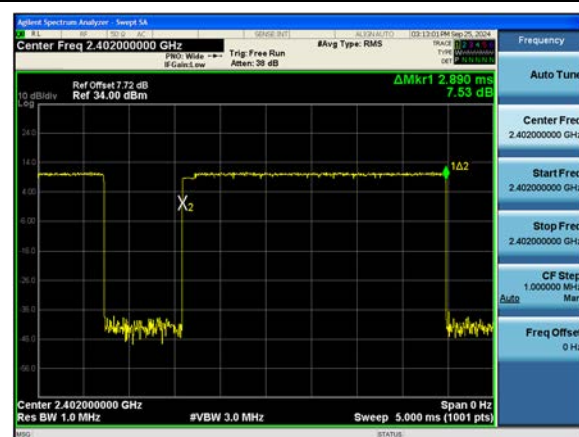


10.6 SPURIOUS EMISSIONS

10.6.1 CONDUCTED SPURIOUS EMISSIONS


In order to simplify the report, attached plots were only the worst case channel and data rate.

Test Plots(Conducted Spurious Emission) – [Ant. 1] _GFSK(2 441 MHz)


1 GHz ~ 3 GHz

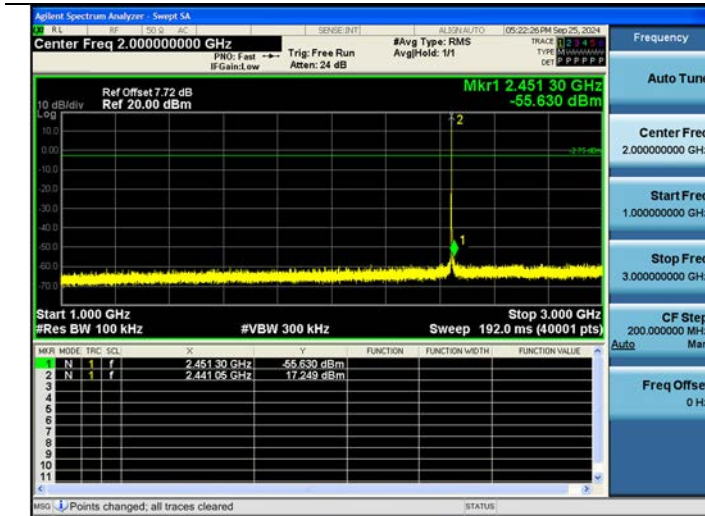


3 GHz ~ 5 GHz

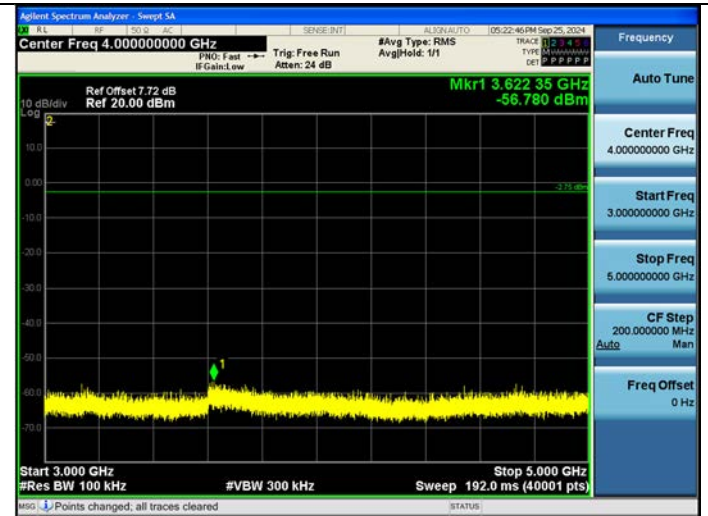


5 GHz ~ 7 GHz

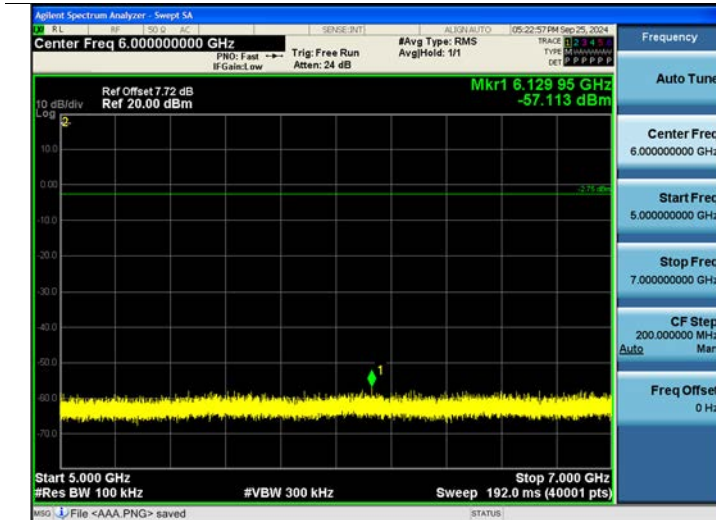


7 GHz ~ 9 GHz

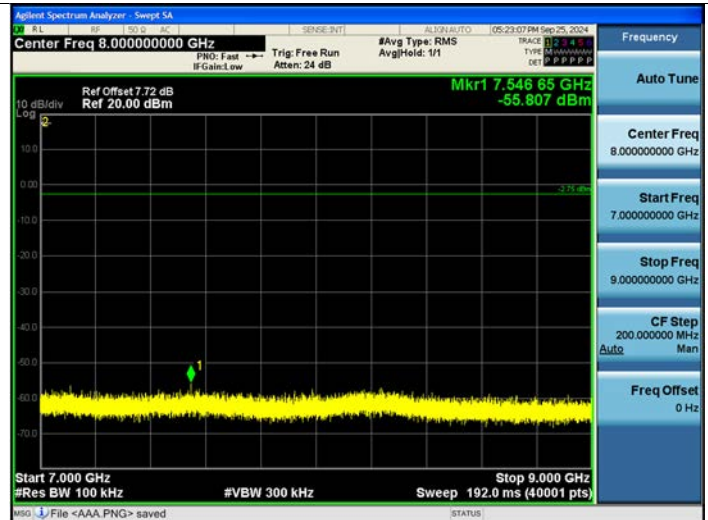


9 GHz ~ 11 GHz

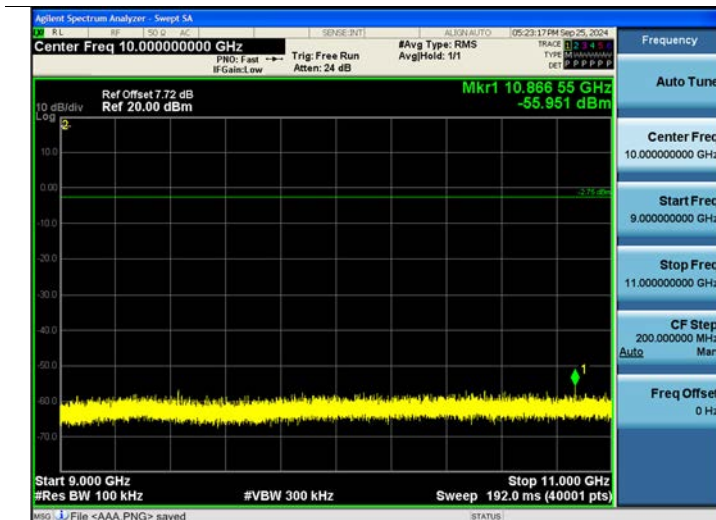


11 GHz ~ 13 GHz

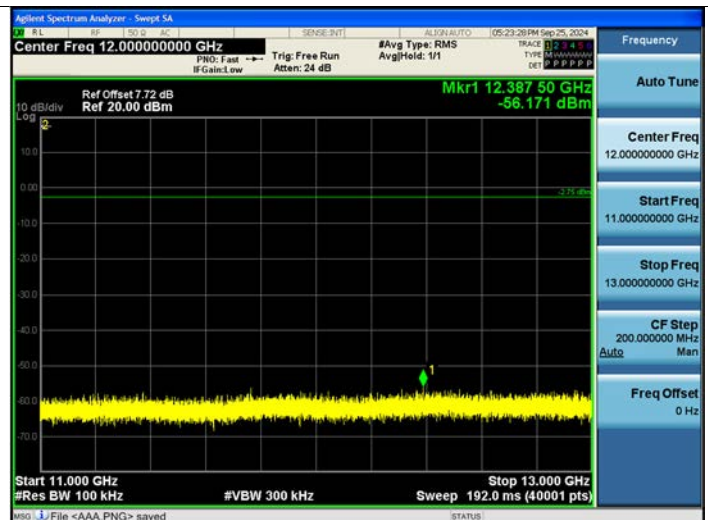


13 GHz ~ 15 GHz

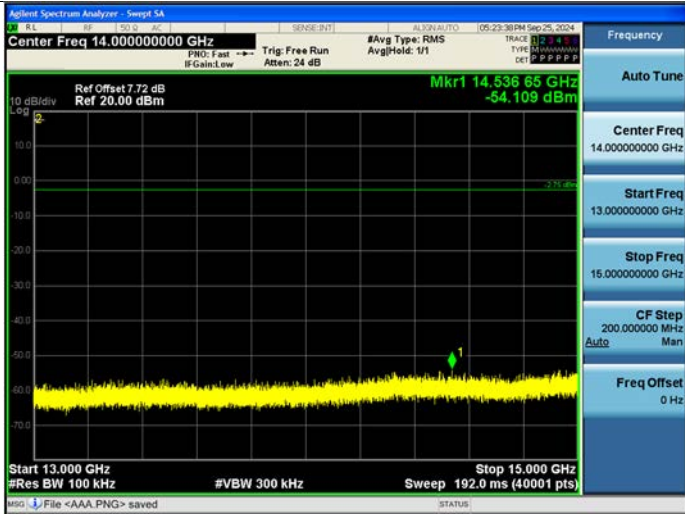


15 GHz ~ 17 GHz

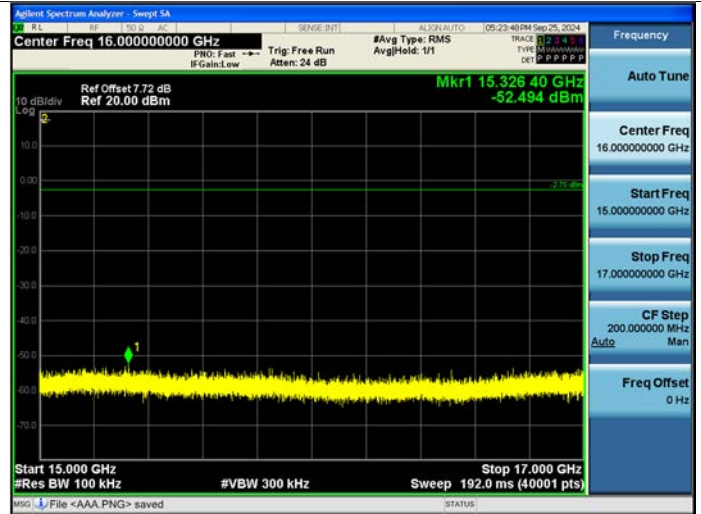


17 GHz ~ 19 GHz

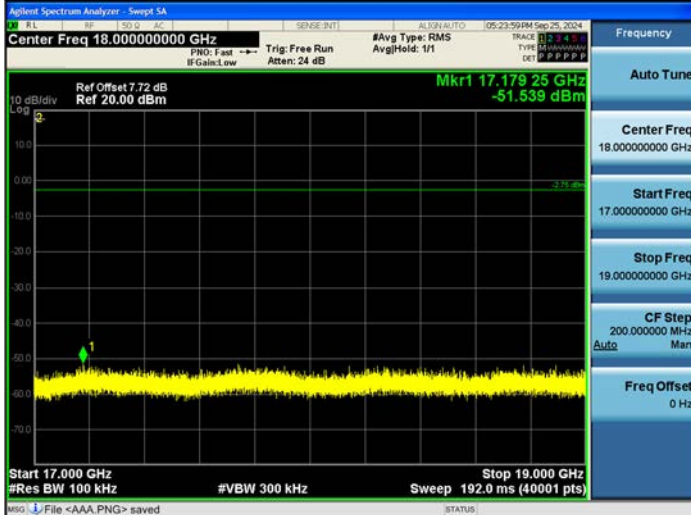


19 GHz ~ 21 GHz

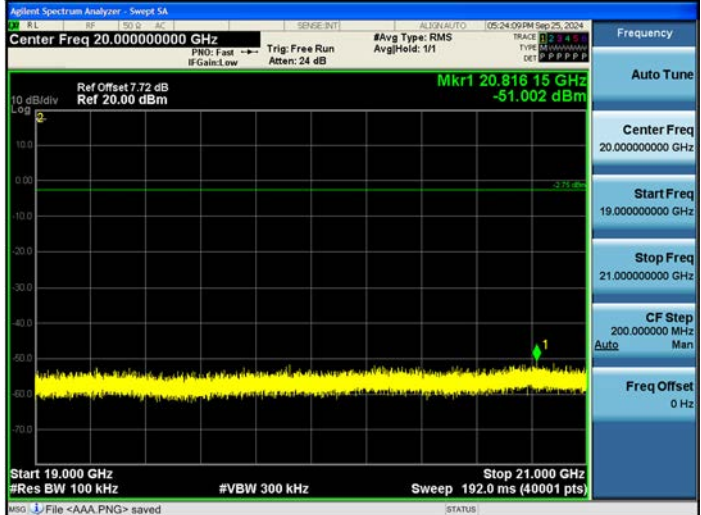


21 GHz ~ 23 GHz

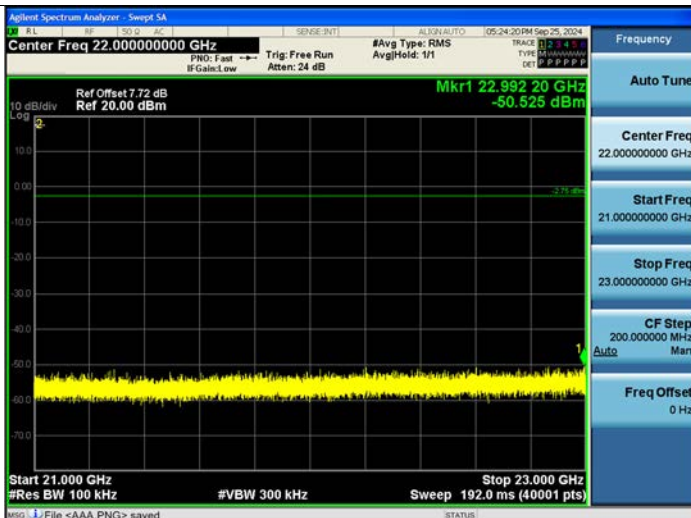

23 GHz ~ 25 GHz

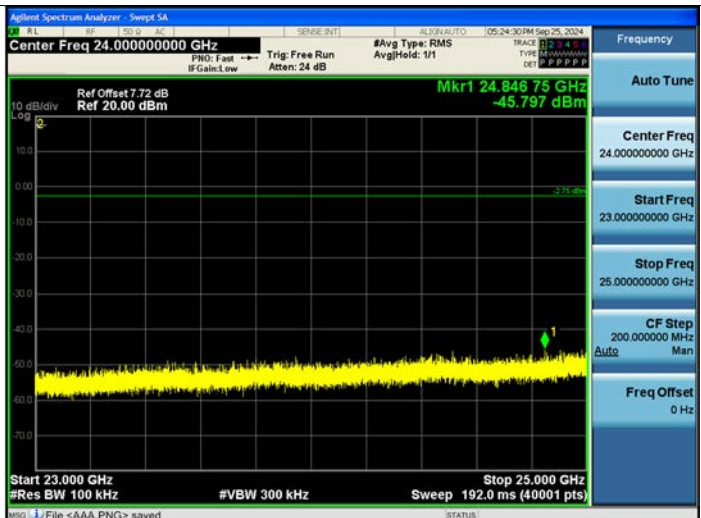

30 MHz ~ 1 GHz

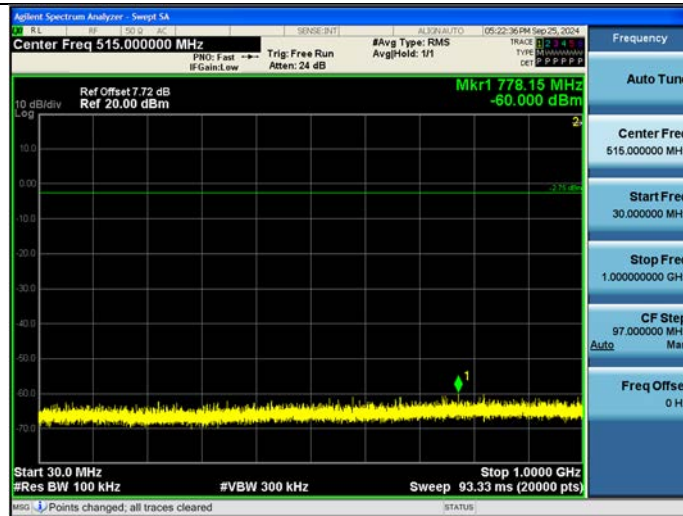


Note


1. Limit (dBm): -2.75

[Ant. 2] _GFSK(2 441 MHz)


1 GHz ~ 3 GHz

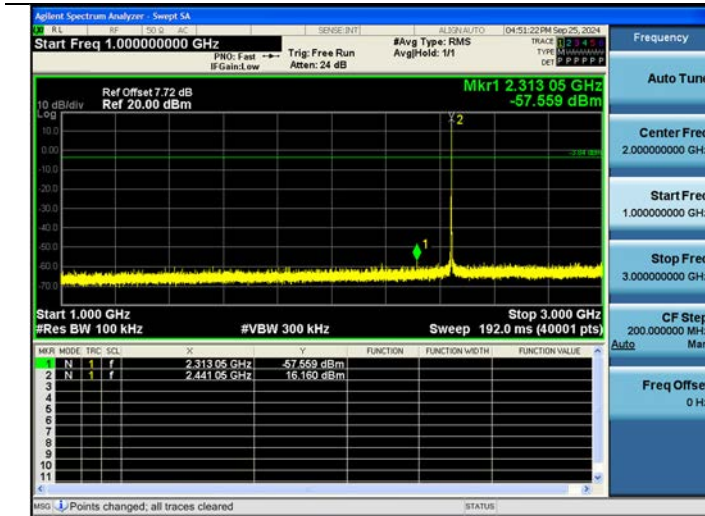

3 GHz ~ 5 GHz

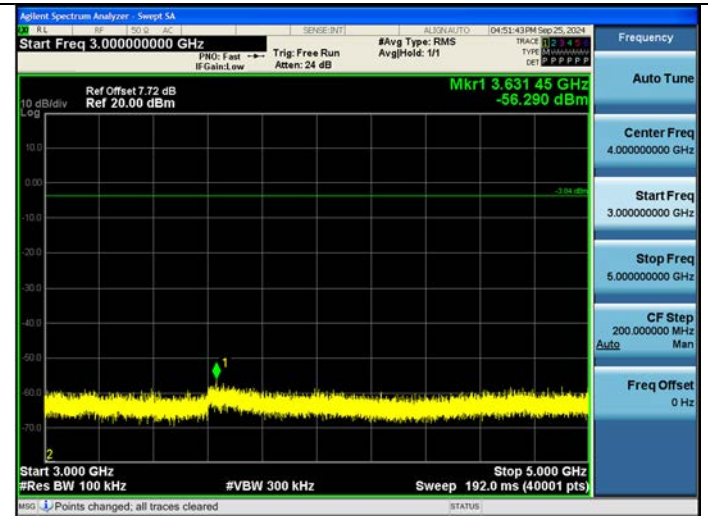


5 GHz ~ 7 GHz

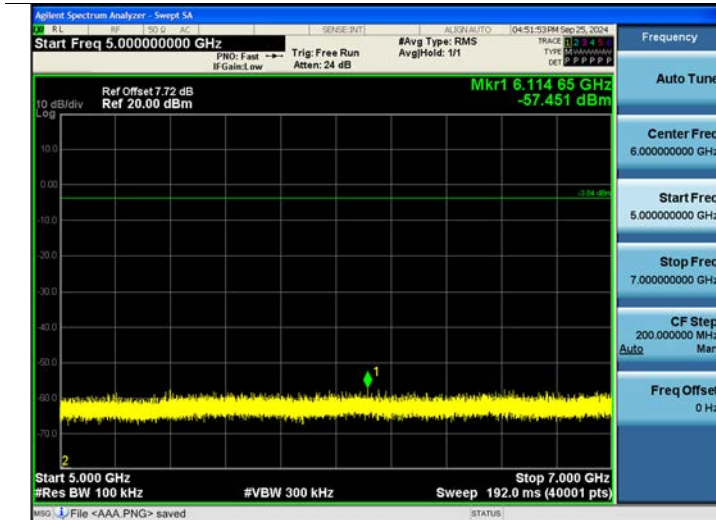


7 GHz ~ 9 GHz




9 GHz ~ 11 GHz

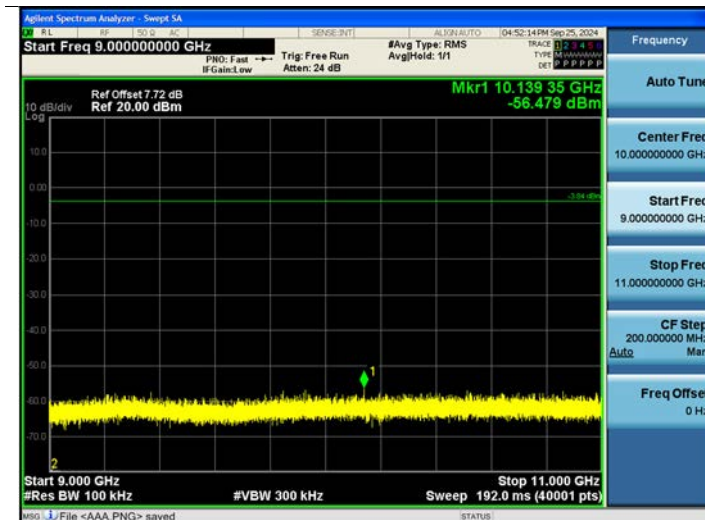


11 GHz ~ 13 GHz

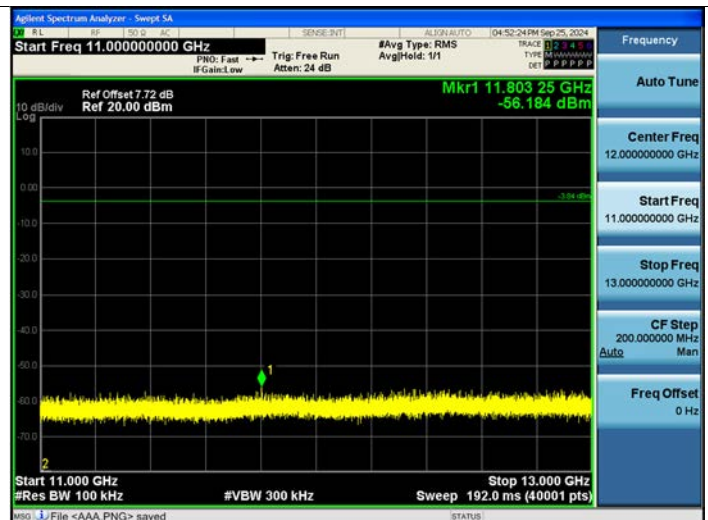


13 GHz ~ 15 GHz

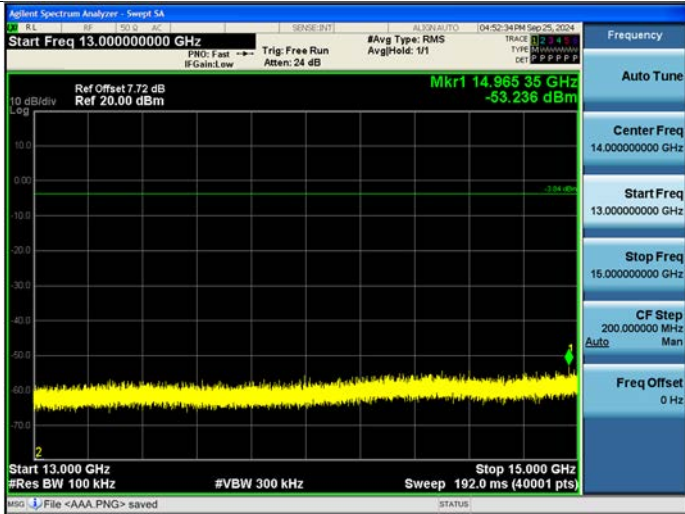


15 GHz ~ 17 GHz

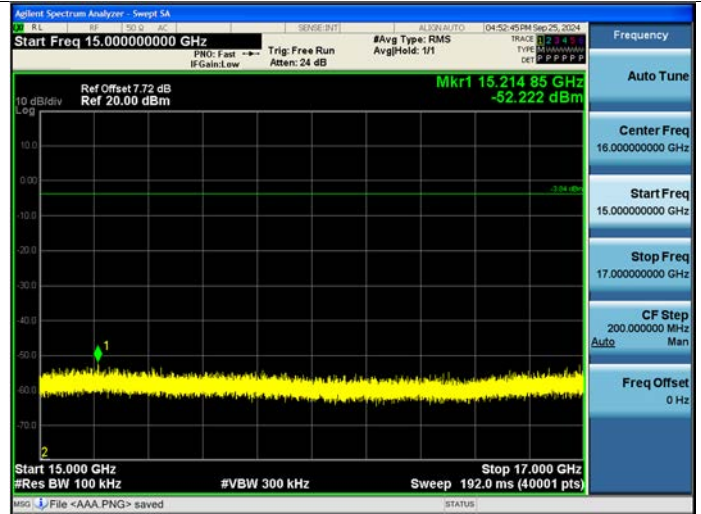


17 GHz ~ 19 GHz

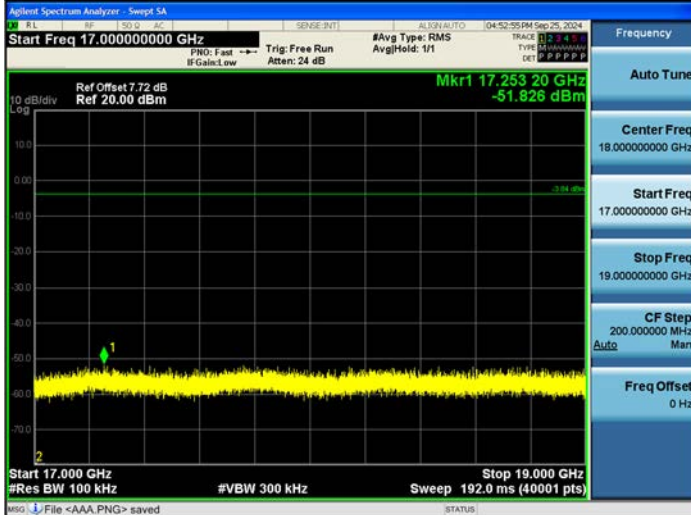


19 GHz ~ 21 GHz

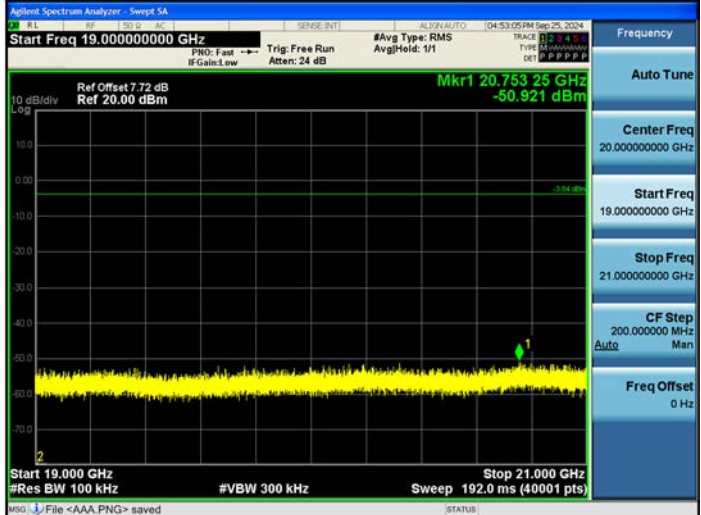


21 GHz ~ 23 GHz

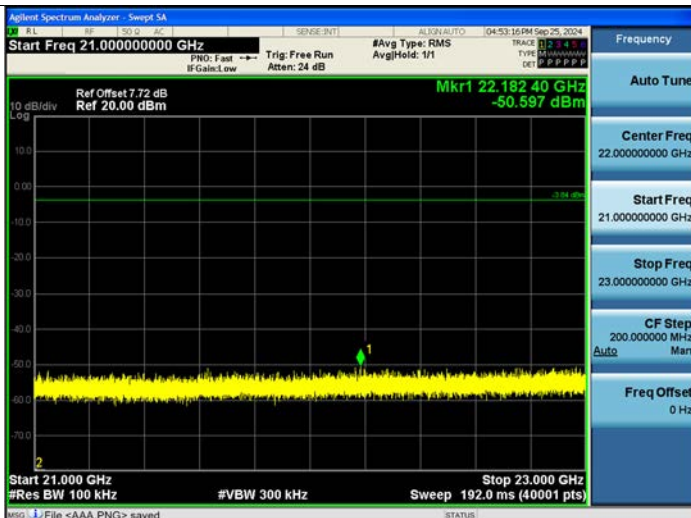

23 GHz ~ 25 GHz

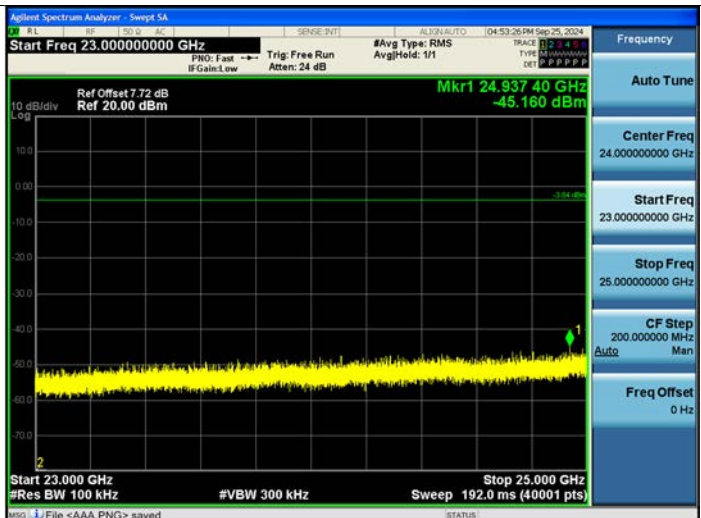

30 MHz ~ 1 GHz

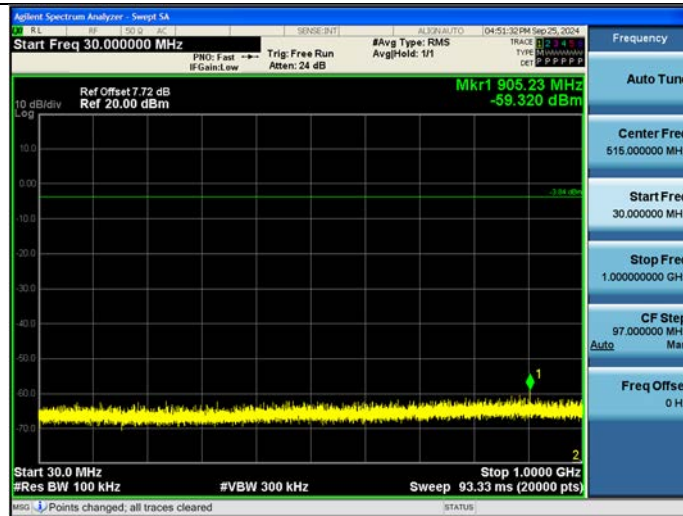


Note


1. Limit (dBm): -3.84

[Dual Ant. 1]_ 8DPSK(2 441 MHz)


1 GHz ~ 3 GHz

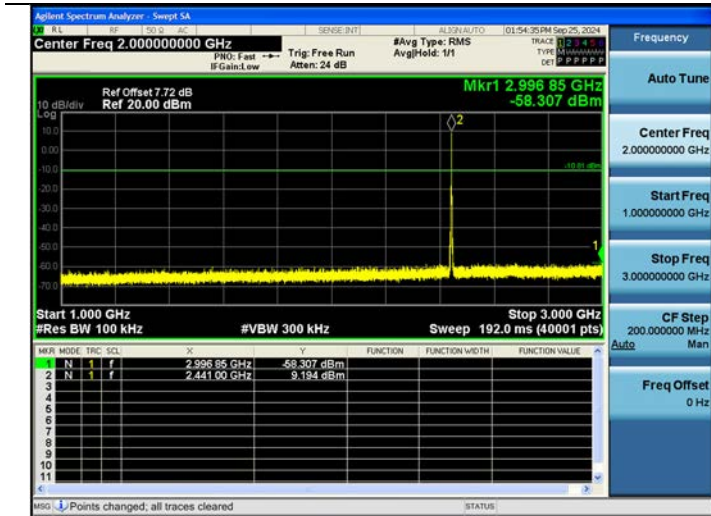


3 GHz ~ 5 GHz

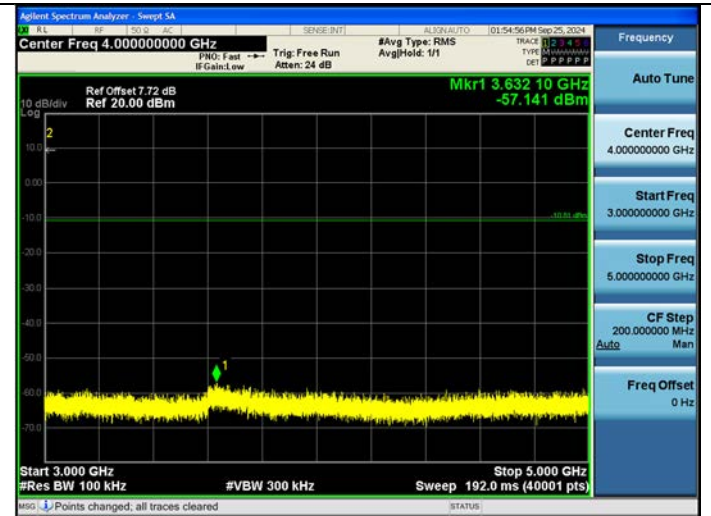


5 GHz ~ 7 GHz

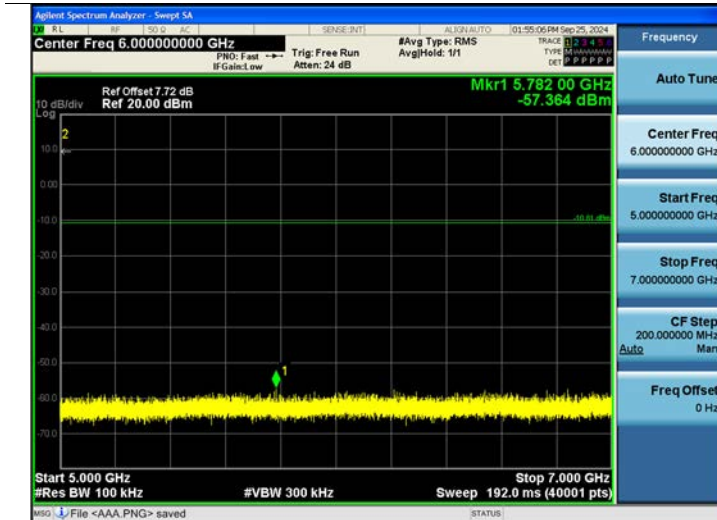


7 GHz ~ 9 GHz

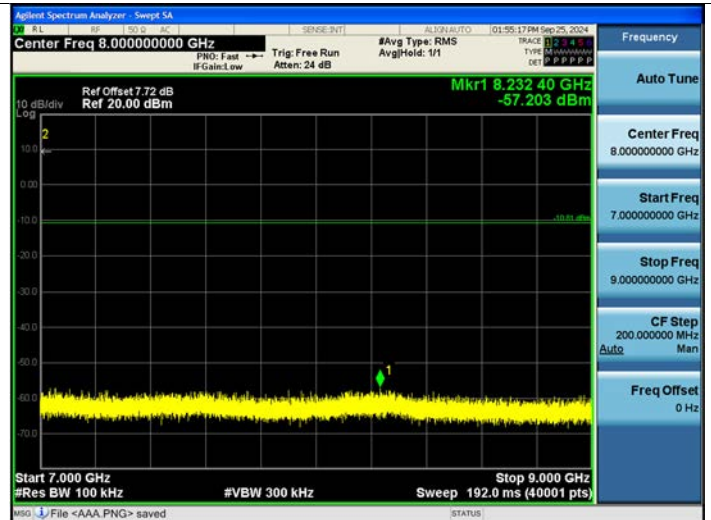


9 GHz ~ 11 GHz

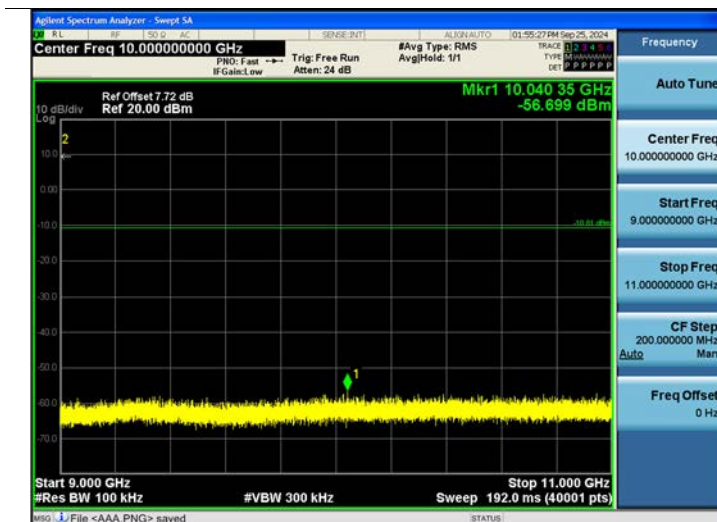


11 GHz ~ 13 GHz

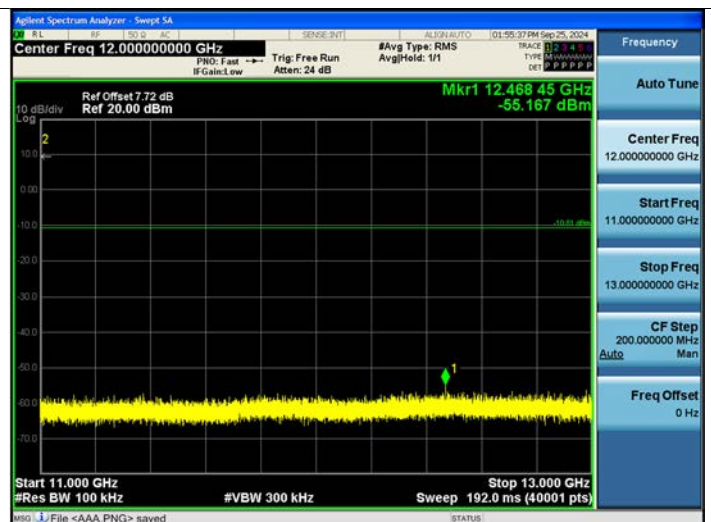


13 GHz ~ 15 GHz

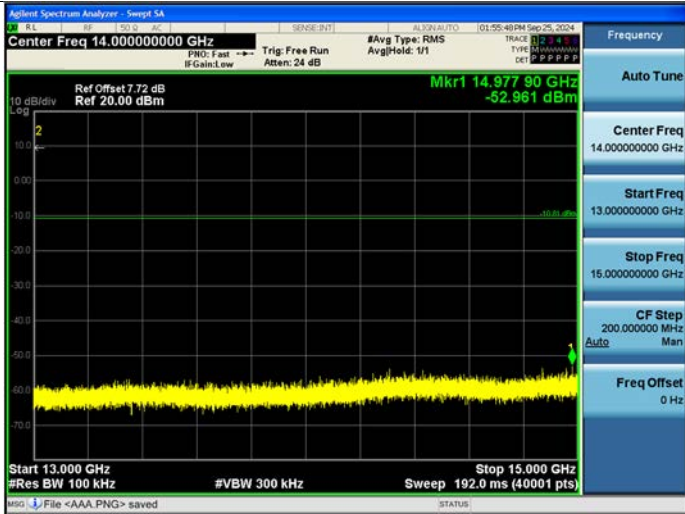


15 GHz ~ 17 GHz

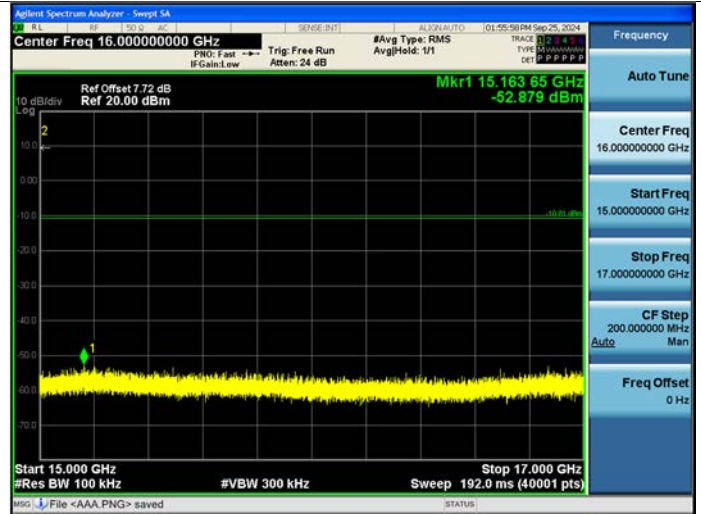


17 GHz ~ 19 GHz

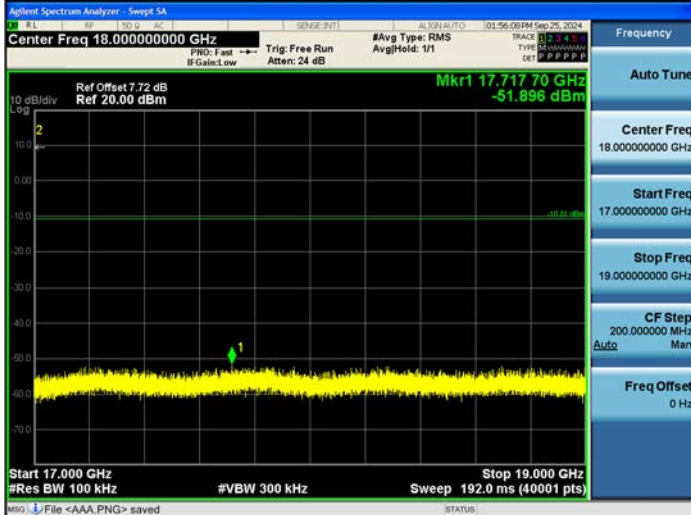


19 GHz ~ 21 GHz

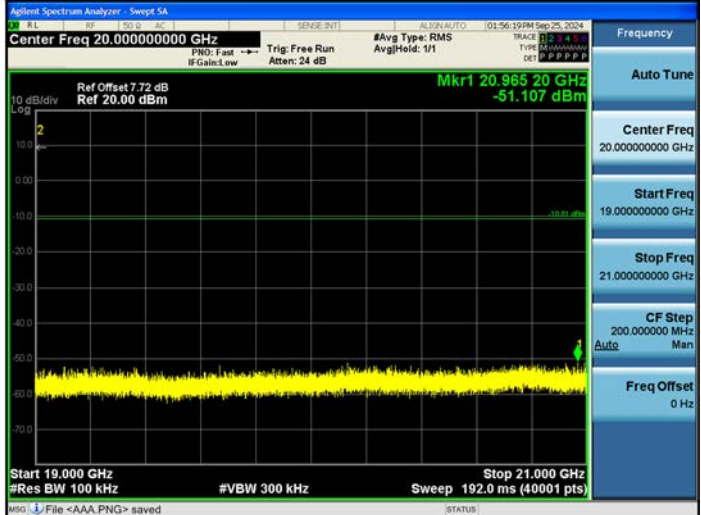


21 GHz ~ 23 GHz

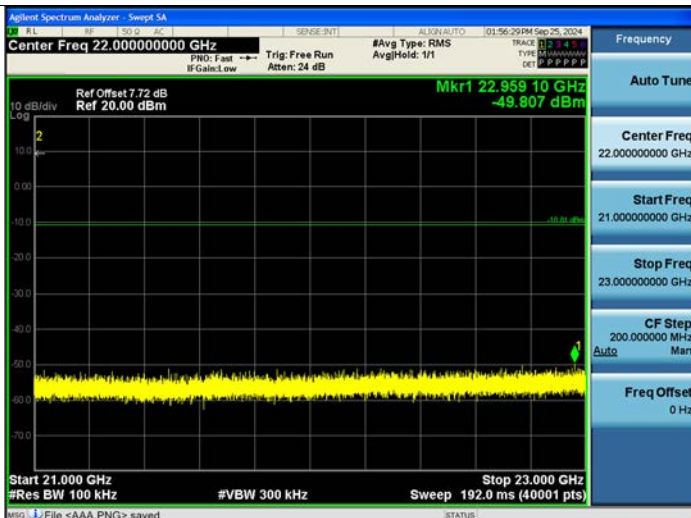

23 GHz ~ 25 GHz

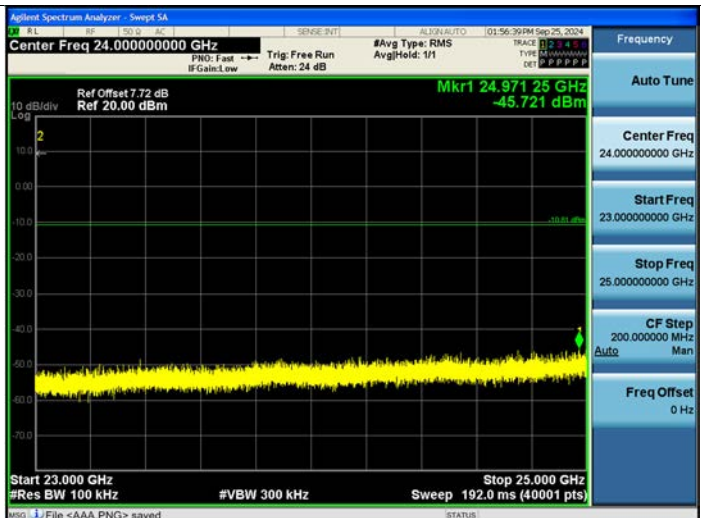

30 MHz ~ 1 GHz

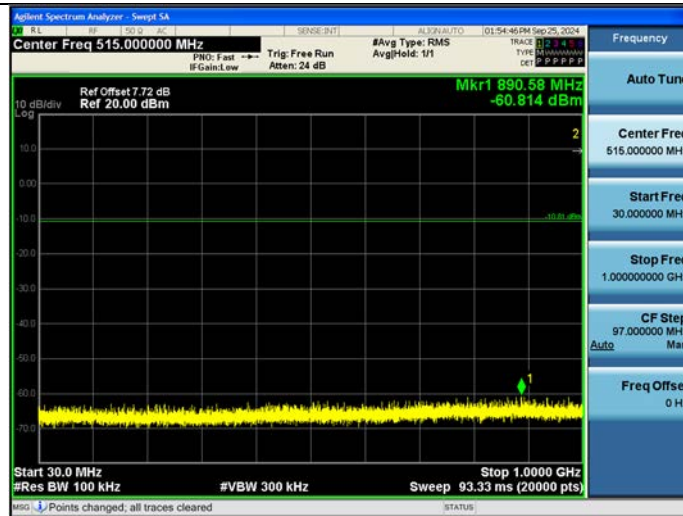

Note

1. Limit (dBm): -10.81