

Plot 7-189. Contention Based Protocol Timing Plot (320MHz (UNII Band 8) - Ch. 191 Mid)



Plot 7-190. Contention Based Protocol Timing Plot (320MHz (UNII Band 8) - Ch. 191 High)

FCC ID: A3LSMS936B		MEASUREMENT REPORT					
Test Report S/N:	Test Dates:	EUT Type:	Dags 172 of 202				
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Page 173 of 202				
© 2024 ELEMENT			\/ 0 0 02/01/2010				


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



7.7.3 Channel Move Plots

This section demonstrates the effect of injecting the AWGN signal at various locations throughout the 802.11be 320MHz signal. The blue trace shows the full 320MHz signal prior to AWGN injection while the black trace shows the spectrum following AWGN injection. The following items were observed as demonstrated in the three plots shown below:


- When a 10 MHz AWGN signal centered at 6110 MHz (lower edge of channel) is injected, the channel completely stops transmitting.
- When a 10 MHz AWGN signal centered at 6265 MHz (middle of channel) is injected, the channel completely stops transmitting.
- When a 10 MHz AWGN signal centered at 6420 MHz (upper edge of channel) is injected, the channel completely stops transmitting.

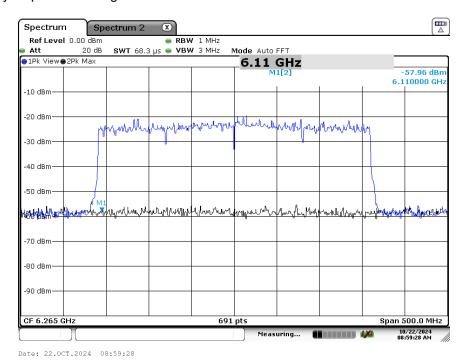


Plot 7-191. CBP 320MHz Channel - Injection Lower Edge - [6110 MHz]

FCC ID: A3LSMS936B		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 174 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	raye 174 01 202
0.0004 ELEMENT	00/00/2: ::/00/202:	. crazie riandes	110000010110010



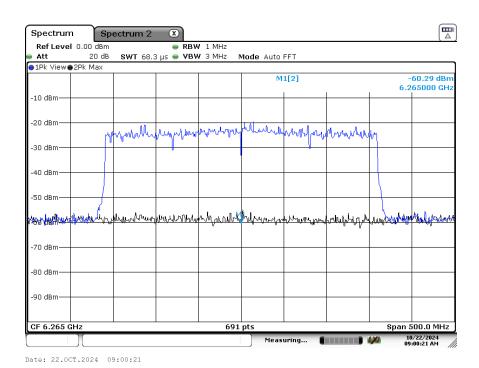

Plot 7-192. CBP 320MHz Channel - Injection Center - [6265 MHz]

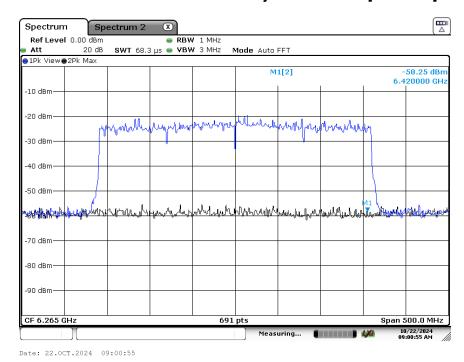

Plot 7-193. CBP 320MHz Channel - Injection Upper Edge - [6420 MHz]

FCC ID: A3LSMS936B		MEASUREMENT REPORT					
Test Report S/N:	Test Dates:	EUT Type:	Dogg 175 of 202				
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Page 175 of 202				
© 2024 ELEMENT			\/ \0 \0 \02/\01/2\010				

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



7.8 Radiated Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. All channels, modes (e.g. 802.11ax (20/40/80/160MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz

Emissions found in a restricted band are subject to the limits of 15.209 as shown in the table below.

Frequency	Field Strength [µV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-89. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 - Sections 12.7.7.2, 12.7.6, 12.7.5

<u>Test Settings – Above 1GHz</u>

Average Field Strength Measurements (Method AD – Average Detection)

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = power average (RMS)
- 5. Number of measurement points = 1001 (Number of points must be > 2 x span\\RBW)
- 6. Sweep time = auto
- 7. Trace (RMS) averaging was performed over at least 100 traces.

FCC ID: A3LSMS936B		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 176 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Page 176 01 202



Peak Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize.

<u>Test Settings – Below 1GHz</u>

Quasi-Peak Field Strength Measurements

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
- 2. RBW = 120kHz (for emissions from 30MHz 1GHz)
- 3. Detector = quasi-peak
- 4. Sweep time = auto couple
- 5. Trace mode = max hold
- 6. Trace was allowed to stabilize.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

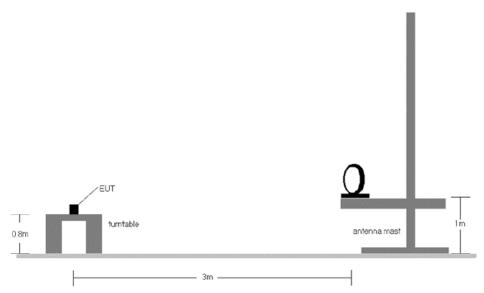


Figure 7-6. Radiated Test Setup < 30MHz

FCC ID: A3LSMS936B		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 177 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	raye 177 01 202
1102400200000-20.7 toE	03/00/24 - 11/00/2024	1 Ortable Haridset	1/000000101/001



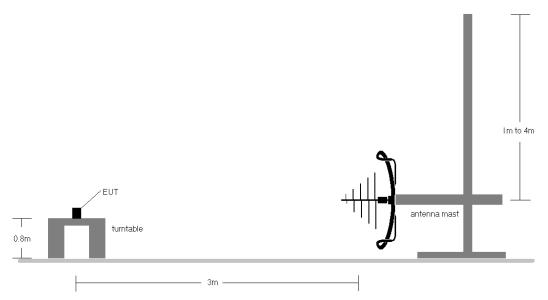


Figure 7-7. Radiated Test Setup < 1GHz

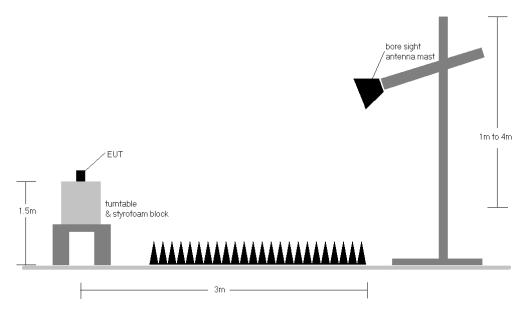


Figure 7-8. Radiated Test Setup > 1GHz

FCC ID: A3LSMS936B		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 178 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Page 176 01 202



Test Notes

- 1. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in §15.209. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At 3 meters, the field strength limit in dB_μV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB_μV/m.
- 2. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [68.2dB μ V/m]. If a peak measurement passes the average limit, it was determined no further investigation is necessary.
- 3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
- 4. This unit was tested with its standard battery.
- 5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported, however emissions whose levels were not within 20dB of the respective limits were not reported.
- 6. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
- 7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
- 8. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 9. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all of the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dBμV/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- o Margin [dB] = Field Strength Level [dB μ V/m] Limit [dB μ V/m]


Radiated Band Edge Measurement Offset

The amplitude offset shown in the radiated restricted band edge plots was calculated using the formula:
 Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain


FCC ID: A3LSMS936B		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Dags 170 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Page 179 of 202




7.8.1 MIMO Radiated Spurious Emission Measurements (26 Tones)

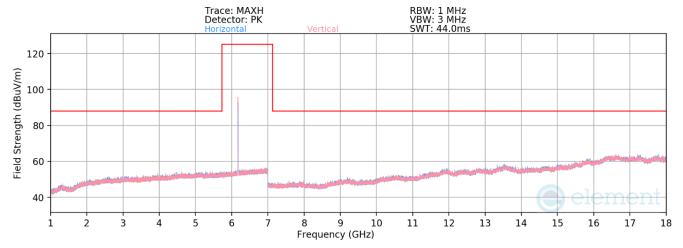

Plot 7-194. Radiated Spurious Plot 1GHz - 18GHz MIMO (802.11be - UNII Band 5 Ch. 45)

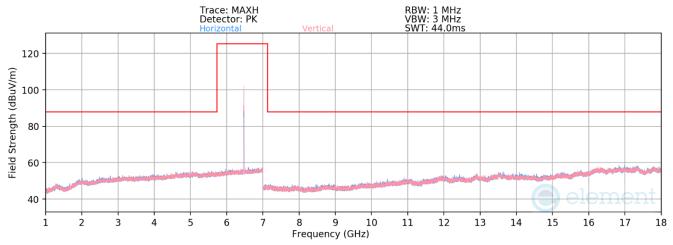


Plot 7-195. Radiated Spurious Plot 1GHz - 18GHz MIMO (802.11be - UNII Band 6 Ch. 105)

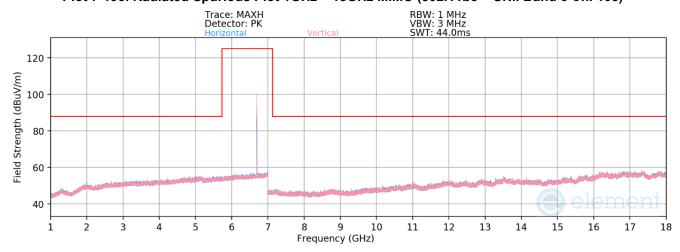


Plot 7-196. Radiated Spurious Plot 1GHz - 18GHz MIMO (802.11be - UNII Band 7 Ch. 149)

C ID: A3LSMS936B	Approved by: Technical Manager
t Report S/N:	Page 180 of 202
2408260066-20.A3L	Page 160 01 202
•	Paç




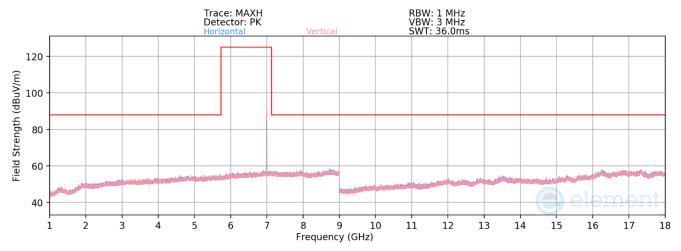

Plot 7-197. Radiated Spurious Plot 1GHz - 18GHz MIMO (802.11be - U Band 8 Ch. 209)

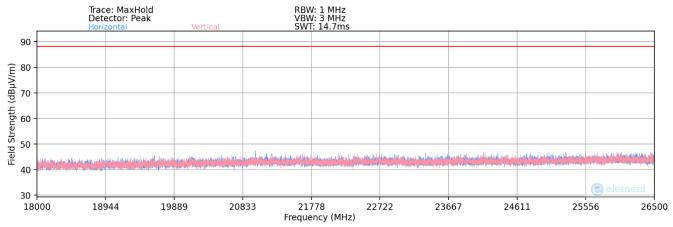

Plot 7-198. Radiated Spurious Plot 18GHz - 26.5GHz (802.11be)

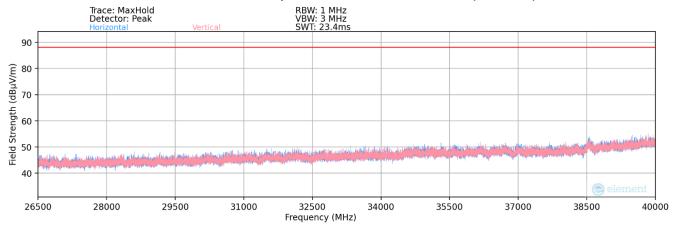

Plot 7-199. Radiated Spurious Plot 26.5GHz - 40GHz (802.11be)

FCC ID: A3LSMS936B		MEASUREMENT REPORT				
Test Report S/N:	Test Dates:	EUT Type:	Page 181 of 202			
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Page 161 01 202			
@ 2024 ELEMENT			V 0 0 02/04/2010			



7.8.1.1 MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII Band 5

Mode	Antenna	UNII Band	Channel	Channel Erea	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Azimuth	Analyzer Level [dBm]	AFCL [dB/m]	Correction Factor [dR]	Field Strength [dBµV/m]	Limit [dBμV/m]	Margin [dB]
						*	11870.00	Average	V	-	-	-85.02	21.15	0.00	43.13	53.98	-10.85
						*	11870.00	Peak	V	-	-	-73.80	20.92	0.00	54.12	73.98	-19.86
							17805.00	Average	V	-	-	-86.03	31.49	0.00	52.46	53.98	-1.52
			2	5935	4	*	17805.00	Peak	V	-		-74.78	31.49	0.00	63.71	73.98	-10.27
						*	23740.00	Average	V	-		-66.04	3.58	-9.54	35.00	53.98	-18.98
						*	23740.00	Peak	V	-		-55.97	3.58	-9.54	45.07	73.98	-28.91
							29675.00	Peak	V	-	•	-56.82	5.33	-9.54	45.97	68.20	-22.23
						*	12350.00	Average	V	-	-	-85.63	21.89	0.00	43.26	53.98	-10.72
802.11be	MIMO	5				*	12350.00	Peak	V	-	-	-73.40	21.31	0.00	54.91	73.98	-19.07
RU26T	MIMO	3	45	6175	4	*	18525.00	Average	V	-		-65.19	1.16	-9.54	33.43	53.98	-20.55
			43	61/3	4	*	18525.00	Peak	V	-		-55.15	1.16	-9.54	43.47	73.98	-30.51
							24700.00	Peak	V	-		-56.85	3.72	-9.54	44.33	68.20	-23.87
							30875.00	Peak	V	-	,	-56.02	6.32	-9.54	47.76	68.20	-20.44
							12830.00	Peak	V	-	-	-72.45	17.82	0.00	52.37	68.20	-15.83
						*	19245.00	Average	V	-	-	-65.15	1.84	-9.54	34.15	53.98	-19.83
			93	6415	4	*	19245.00	Peak	V	-	,	-55.04	1.84	-9.54	44.26	73.98	-29.72
							25660.00	Peak	V	-	-	-56.24	3.90	-9.54	45.12	68.20	-23.08
							32075.00	Peak	V	-		-67.13	6.64	-9.54	36.97	68.20	-31.23

Table 7-90. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMS936B		MEASUREMENT REPORT					
Test Report S/N:	Test Dates:	EUT Type:	Domo 192 of 202				
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Page 182 of 202				
© 2024 ELEMENT			V 0 0 02/01/2010				



7.8.1.2 MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII Band 6

Mode	Antenna	UNII Band	Channel	Channel Erec	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
							12870.00	Peak	V	-	-	-72.46	18.10	0.00	52.64	68.20	-15.56
						*	19305.00	Average	V	-	-	-65.60	1.64	-9.54	33.50	53.98	-20.48
			97	6435	4	*	19305.00	Peak	V	-	-	-55.95	1.64	-9.54	43.15	73.98	-30.83
							25740.00	Peak	V	-	-	-56.01	3.84	-9.54	45.29	68.20	-22.91
							32175.00	Peak	V	-	-	-56.78	6.80	-9.54	47.48	68.20	-20.72
							12950.00	Peak	V	-	-	-72.63	18.24	0.00	52.61	68.20	-15.59
						*	19425.00	Average	V	-	-	-65.58	1.80	-9.54	33.68	53.98	-20.30
802.11be RU26T	MIMO	6	105	6475	4	*	19425.00	Peak	V	-	-	-56.04	1.80	-9.54	43.22	73.98	-30.76
							25900.00	Peak	V	-	-	-56.50	4.24	-9.54	45.20	68.20	-23.00
							32375.00	Peak	V	-	-	-55.89	6.46	-9.54	48.03	68.20	-20.17
							13030.00	Peak	V	-	-	-72.71	18.38	0.00	52.67	68.20	-15.53
						*	19545.00	Average	V	-	-	-65.95	1.84	-9.54	33.35	53.98	-20.63
			113	6515	4	*	19545.00	Peak	v	-	-	-55.96	1.84	-9.54	43.34	73.98	-30.64
							26060.00	Peak	v	-	-	-56.00	4.18	-9.54	45.64	68.20	-22.56
							32575.00	Peak	V	-	-	-56.29	6.18	-9.54	47.35	68.20	-20.85

Table 7-91. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMS936B		MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dags 192 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Page 183 of 202
© 2024 ELEMENT			\/ 0 0 02/01/2010



7.8.1.3 MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII Band 7

Mode	Antenna	UNII Band	Channel	Channel	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Azimuth	Analyzer Level [dBm]	AFCL [dB/m]	Correction	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
							13070.00	Peak	V	-	-	-72.20	18.28	0.00	53.08	68.20	-15.12
						*	19605.00	Average	V	-	-	-65.36	2.38	-9.54	34.48	53.98	-19.50
			117	6535	4	*	19605.00	Peak	V	-	-	-55.63	2.38	-9.54	44.21	73.98	-29.77
							26140.00	Peak	V	-	-	-55.25	4.03	-9.54	46.24	68.20	-21.96
							32675.00	Peak	V	-	-	-56.72	6.46	-9.54	47.20	68.20	-21.00
						*	13390.00	Average	V	-	-	-83.98	17.72	0.00	40.74	53.98	-13.24
						*	13390.00	Peak	V	-	-	-71.75	17.76	0.00	53.01	73.98	-20.97
802.11be	MIMO	7	149	6695	4	*	20085.00	Average	V	-	-	-65.87	2.58	-9.54	34.17	53.98	-19.81
RU26T	WIIWO	,	149	0093	4	*	20085.00	Peak	V	-	-	-56.24	2.58	-9.54	43.80	73.98	-30.18
							26780.00	Peak	V	-	-	-56.65	4.33	-9.54	45.14	68.20	-23.06
							33475.00	Peak	V	-	-	-56.75	6.96	-9.54	47.67	68.20	-20.53
							13750.00	Peak	V	-	-	-70.82	17.56	0.00	53.74	68.20	-14.46
						*	20625.00	Average	V	-	-	-66.02	3.01	-9.54	34.45	53.98	-19.53
			185	6875	4	*	20625.00	Peak	V	-	-	-54.87	3.01	-9.54	45.60	73.98	-28.38
							27500.00	Peak	V	-	-	-56.72	3.97	-9.54	44.71	68.20	-23.49
							34375.00	Peak	V	-	-	-57.03	7.33	-9.54	47.76	68.20	-20.44

Table 7-92. Radiated Measurements MIMO (26 Tones)

FCC ID: A3LSMS936B		MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Domo 194 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Page 184 of 202
© 2024 ELEMENT			V 9 0 02/01/2019



7.8.1.4 MIMO Radiated Spurious Emission Measurements (26 Tones) – UNII Band 8


Mode	Antenna	UNII Band	Channel	Channel Erec	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth	Analyzer Level [dBm]	AFCL [dB/m]	Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
							13790.00	Peak	V	-	-	-71.02	17.06	0.00	53.04	68.20	-15.16
						*	20685.00	Average	V	-	-	-65.75	3.01	-9.54	34.72	53.98	-19.26
			189	6895	4	*	20685.00	Peak	V	-	-	-55.10	3.01	-9.54	45.37	73.98	-28.61
							27580.00	Peak	V	-	-	-56.89	4.40	-9.54	44.97	68.20	-23.23
							34475.00	Peak	V	-		-57.30	7.31	-9.54	47.47	68.20	-20.73
							13990.00	Peak	V	-	-	-71.40	17.81	0.00	53.41	68.20	-14.79
						*	20985.00	Average	V	-	-	-65.58	3.27	-9.54	35.15	53.98	-18.83
802.11be RU26T	MIMO	8	209	6995	4	*	20985.00	Peak	V	-	-	-55.42	3.27	-9.54	45.31	73.98	-28.67
							27980.00	Peak	V	-	-	-55.64	4.40	-9.54	46.22	68.20	-21.98
							34975.00	Peak	V	-		-56.90	7.79	-9.54	48.35	68.20	-19.85
							14230.00	Peak	V	-	-	-71.61	17.82	0.00	53.21	68.20	-14.99
						*	21345.00	Average	V	-	-	-65.99	3.57	-9.54	35.04	53.98	-18.94
			233	7115	4	*	21345.00	Peak	V	-	-	-55.76	3.57	-9.54	45.27	73.98	-28.71
							28460.00	Peak	V	-	-	-56.32	5.01	-9.54	46.15	68.20	-22.05
							35575.00	Peak	V	-	-	-57.25	7.78	-9.54	47.99	68.20	-20.21

Table 7-93. Radiated Measurements MIMO (26 Tones)


FCC ID: A3LSMS936B		MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogg 105 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Page 185 of 202
© 2024 ELEMENT	•		V 9 0 02/01/2019




7.8.2 MIMO Radiated Spurious Emission Measurements (242 Tones)

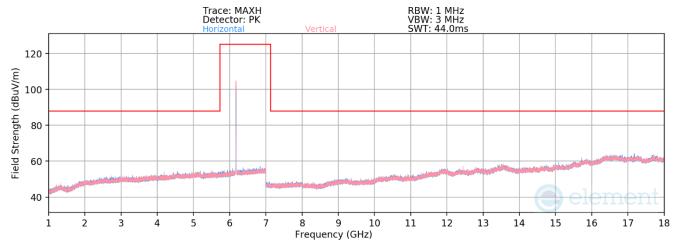

Plot 7-200. Radiated Spurious Plot 1GHz - 18GHz MIMO (802.11be - UNII Band 5 Ch. 45)

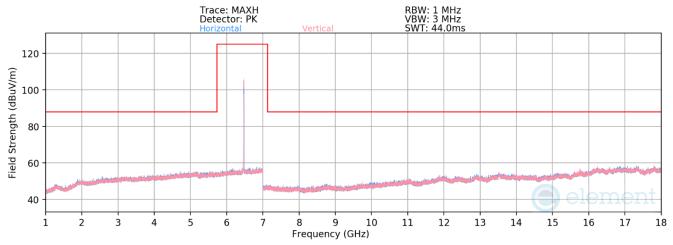


Plot 7-201. Radiated Spurious Plot 1GHz - 18GHz MIMO (802.11be - UNII Band 6 Ch. 105)

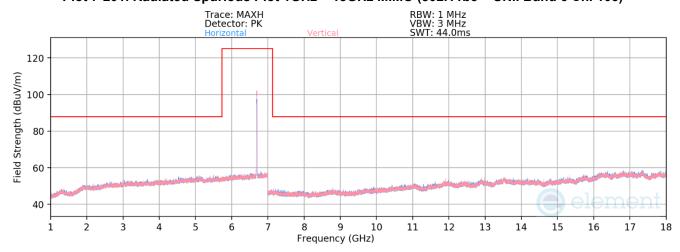


Plot 7-202. Radiated Spurious Plot 1GHz - 18GHz MIMO (802.11be - UNII Band 7 Ch. 149)

MEXIONE MET IN THE	MEASUREMENT REPORT	Technical Manager
EUT Type:	EUT Type:	Page 186 of 202
Portable Handset	1/06/2024 Portable Handset	Fage 180 01 202




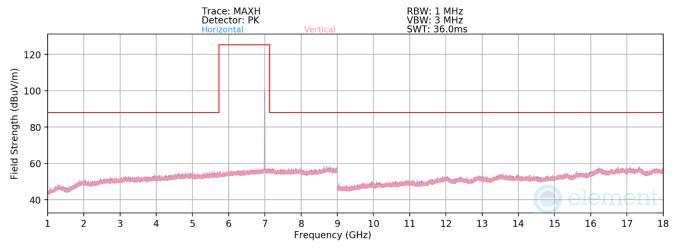

Plot 7-203. Radiated Spurious Plot 1GHz - 18GHz MIMO (802.11be - U Band 8 Ch. 209)

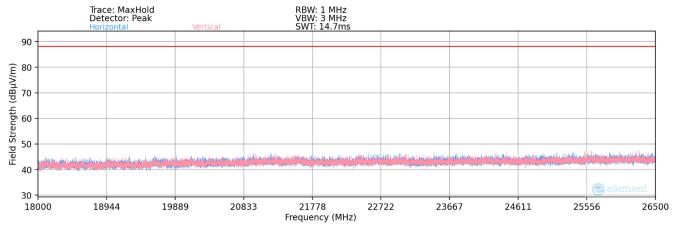

Plot 7-204. Radiated Spurious Plot 18GHz - 26.5GHz (802.11be)

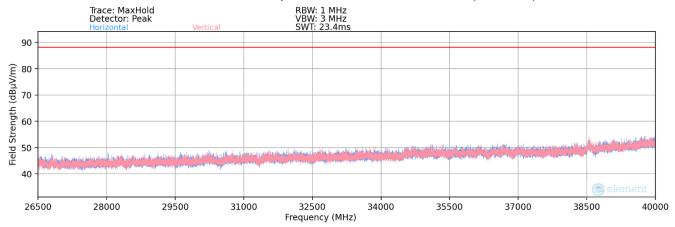

Plot 7-205. Radiated Spurious Plot 26.5GHz - 40GHz (802.11be)

FCC ID: A3LSMS936B		MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dags 197 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Page 187 of 202
© 0004 ELEMENT		·	1/ 0 0 00/04/0040



7.8.2.1 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 5

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
						*	11870.00	Average	V	-	-	-84.97	21.15	0.00	43.18	53.98	-10.80
						*	11870.00	Peak	V	-	-	-73.81	21.15	0.00	54.34	73.98	-19.64
						*	17805.00	Average	V	-	-	-85.98	31.45	0.00	52.47	53.98	-1.51
			2	5935	61	*	17805.00	Peak	V	-	-	-74.18	31.49	0.00	64.31	73.98	-9.67
						*	23740.00	Average	V	-	-	-66.01	3.58	-9.54	35.03	53.98	-18.95
						*	23740.00	Peak	V	-	-	-56.58	3.58	-9.54	44.46	73.98	-29.52
							29675.00	Peak	V	-	-	-56.58	5.33	-9.54	46.21	68.20	-21.99
						*	12350.00	Average	V	-	-	-85.68	21.89	0.00	43.21	53.98	-10.77
802.11be	MIMO	5				*	12350.00	Peak	V	-	-	-74.49	21.89	0.00	54.40	73.98	-19.58
RU 242T	WIIWO	,	45	6175	61	*	18525.00	Average	V	-	-	-65.35	1.16	-9.54	33.27	53.98	-20.71
			40	01/3	01	*	18525.00	Peak	V	-	-	-54.80	1.16	-9.54	43.82	73.98	-30.16
							24700.00	Peak	V	-	-	-55.97	3.72	-9.54	45.21	68.20	-22.99
							30875.00	Peak	V	-	-	-56.81	6.32	-9.54	46.97	68.20	-21.23
							12830.00	Peak	V	-	-	-71.50	17.54	0.00	53.04	68.20	-15.16
						*	19245.00	Average	V	-	-	-65.19	1.84	-9.54	34.11	53.98	-19.87
			93	6415	61	*	19245.00	Peak	V	-	-	-55.05	1.84	-9.54	44.25	73.98	-29.73
							25660.00	Peak	V	-	-	-55.80	3.90	-9.54	45.56	68.20	-22.64
							32075.00	Peak	V	-	-	-56.54	6.64	-9.54	47.56	68.20	-20.64

Table 7-94. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMS936B		MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Domo 189 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Page 188 of 202
© 2024 ELEMENT	•		V Q D D2/D1/201Q



7.8.2.2 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 6

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBµV/m]	Margin [dB]
							12870.00	Peak	V	-	-	-71.89	18.10	0.00	53.21	68.20	-14.99
						*	19305.00	Average	V	-	-	-65.69	1.64	-9.54	33.41	53.98	-20.56
			97	6435	61	*	19305.00	Peak	V	-	-	-55.32	1.64	-9.54	43.78	73.98	-30.20
							25740.00	Peak	V	-	-	-55.63	3.84	-9.54	45.67	68.20	-22.53
							32175.00	Peak	V	-	-	-57.36	6.80	-9.54	46.90	68.20	-21.30
							12950.00	Peak	V	-	-	-72.51	18.24	0.00	52.73	68.20	-15.47
002.111						*	19425.00	Average	V	-	-	-65.79	1.80	-9.54	33.47	53.98	-20.51
802.11be RU242T	MIMO	6	105	6475	61	*	19425.00	Peak	V	-	-	-54.98	1.80	-9.54	44.28	73.98	-29.70
							25900.00	Peak	V	-	-	-55.29	4.24	-9.54	46.41	68.20	-21.79
							32375.00	Peak	V	-	-	-56.54	6.46	-9.54	47.38	68.20	-20.82
							13030.00	Peak	V	-	-	-72.23	18.46	0.00	53.23	68.20	-14.97
						*	19545.00	Average	V	-	-	-64.24	1.84	-9.54	35.06	53.98	-18.92
			113	6515	61		19545.00	Peak	V	-	-	-55.77	1.84	-9.54	43.53	73.98	-30.45
							26060.00	Peak	V	-	-	-56.10	4.18	-9.54	45.54	68.20	-22.66
							32575.00	Peak	v	-	-	-55.75	6.18	-9.54	47.89	68.20	-20.31

Table 7-95. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMS936B		MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dama 100 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Page 189 of 202
© 2024 ELEMENT			V 0 0 02/01/2010



7.8.2.3 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 7

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]												
							13070.00	Peak	v	-	-	-72.31	18.33	0.00	53.02	68.20	-15.18												
						*	19605.00	Average	V	-	-	-65.60	2.38	-9.54	34.24	53.98	-19.74												
			117	6535	61	*	19605.00	Peak	V	-	-	-54.74	2.38	-9.54	45.10	73.98	-28.88												
							26140.00	Peak	V	-	-	-55.57	4.03	-9.54	45.92	68.20	-22.28												
							32675.00	Peak	V	-		-57.06	6.46	-9.54	46.86	68.20	-21.34												
													*	13390.00	Average	V	-	-	-83.98	17.76	0.00	40.78	53.98	-13.20					
					61	41	61	61	*	13390.00	Peak	V	-	-	-72.54	17.50	0.00	51.96	73.98	-22.02									
802.11be	MIMO	7	149	6695					61	61	61	61	61	61	61	61	61	61	61	61	61	*	20085.00	Average	V	-	-	-65.53	2.58
RU 242T	WIIWIO	,	14)	0075	01	*	20085.00	Peak	V	-	-	-55.83	2.58	-9.54	44.21	73.98	-29.77												
							26780.00	Peak	V	-	-	-55.90	4.33	-9.54	45.89	68.20	-22.31												
							33475.00	Peak	V	-	-	-56.24	6.96	-9.54	48.18	68.20	-20.02												
							13750.00	Peak	V	-	-	-71.30	17.56	0.00	53.26	68.20	-14.94												
						*	20625.00	Average	V	-	-	-65.72	3.01	-9.54	34.75	53.98	-19.23												
			185	6875	61	*	20625.00	Peak	V	-	-	-55.05	3.01	-9.54	45.41	73.98	-28.57												
							27500.00	Peak	V	-	-	-56.73	3.97	-9.54	44.70	68.20	-23.50												
							34375.00	Peak	V	-	-	-56.57	7.33	-9.54	48.22	68.20	-19.98												

Table 7-96. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMS936B		MEASUREMENT REPORT		
Test Report S/N:	Test Dates:	EUT Type:	Dogg 100 of 202	
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Page 190 of 202	
© 2024 ELEMENT	•	•	V 9 0 02/01/2019	



7.8.2.4 MIMO Radiated Spurious Emission Measurements (242 Tones) – UNII Band 8

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	RU Index	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]															
							13790.00	Peak	V	-	-	-71.39	17.51	0.00	53.12	68.20	-15.08															
						*	20685.00	Average	V	-	-	-65.92	3.01	-9.54	34.55	53.98	-19.43															
			189	6895	61	*	20685.00	Peak	V	-	-	-56.50	3.01	-9.54	43.97	73.98	-30.01															
							27580.00	Peak	V	-	-	-56.59	4.40	-9.54	45.27	68.20	-22.93															
														34475.00	Peak	V	-	-	-56.22	7.31	-9.54	48.55	68.20	-19.65								
								13990.00	Peak	V	-	-	-71.20	17.63	0.00	53.43	68.20	-14.77														
							l										l	l			*	20985.00	Average	V	-	-	-65.87	3.27	-9.54	34.86	53.98	-19.12
802.11be RU242T	MIMO	8	209	6995	61	*	20985.00	Peak	V	-	-	-55.22	3.27	-9.54	45.51	73.98	-28.47															
NO 2 12 I							27980.00	Peak	V	-	-	-56.71	4.40	-9.54	45.15	68.20	-23.05															
							34975.00	Peak	V	-	-	-56.65	7.79	-9.54	48.60	68.20	-19.60															
							14230.00	Peak	V	-	-	-71.91	17.77	0.00	52.86	68.20	-15.34															
						*	21345.00	Average	V	-	-	-66.12	3.57	-9.54	34.91	53.98	-19.07															
			233	7115	61	*	21345.00	Peak	V	-	-	-56.55	3.57	-9.54	44.48	73.98	-29.50															
							28460.00	Peak	V	-	-	-57.38	5.01	-9.54	45.09	68.20	-23.11															
								35575.00	Peak	v	-	-	-57.91	7.78	-9.54	47.33	68.20	-20.87														

Table 7-97. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMS936B		MEASUREMENT REPORT		
Test Report S/N:	Test Dates:	EUT Type:	Dogg 101 of 202	
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Page 191 of 202	
© 2024 ELEMENT	•		\/ \0 \0 \02/\01/2\010	



7.8.3 MIMO Radiated Band Edge Measurements (20MHz BW – Partial Tone – 106T)

Worst Case Mode:
Worst Case Transfer Rate:

RU Index
Distance of Measurements:
Operating Frequency:
Channel:

802.11be


MCS0

53

3 Meters

5935MHz

2

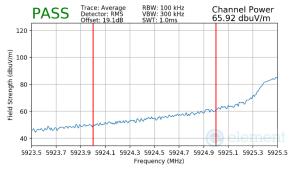

Plot 7-206. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 106T)




Plot 7-207. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 106T)

Worst Case Mode:


Worst Case Transfer Rate:

RU Index
Distance of Measurements:
Operating Frequency:
Channel:

802.11be
MCS0
54
3 Meters
7115MHz
233

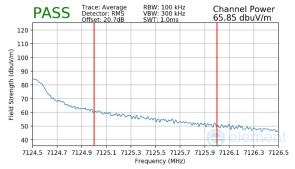

Plot 7-208. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 106T)

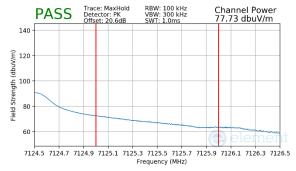

Plot 7-209. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 106T)


FCC ID: A3LSMS936B		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 192 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Fage 192 01 202
© 2024 ELEMENT			V/ 0 0 00/04/2040




7.8.4 MIMO Radiated Band Edge Measurements (20MHz BW – MRU – 106+26T)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index
Distance of Measurements:
Operating Frequency:
Channel:

802.11be
MCS0
82
3 Meters
5935MHz
2

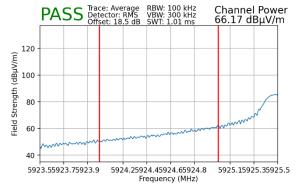


Plot 7-210. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 106+26T)

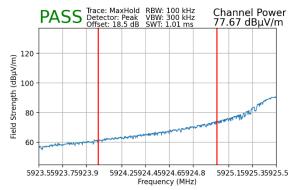


Plot 7-211. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 106+26T)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index
Distance of Measurements:
Operating Frequency:
Channel:

802.11be
MCS0
83
3 Meters
7115MHz
233

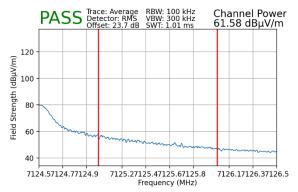

Plot 7-212. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 106+26T)

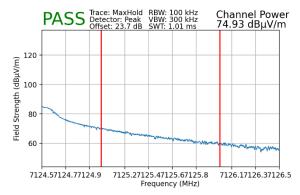

Plot 7-213. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 106+26T)

FCC ID: A3LSMS936B		MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 193 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Fage 193 01 202
0.0004 EL EMENT	00/00/21 11/00/2024	1 Ortabio Flaridoot	1/00000101/001



7.8.5 MIMO Radiated Band Edge Measurements (20MHz BW – Full Tone – 242T)

Worst Case Mode:

Worst Case Transfer Rate:

RU Index
Distance of Measurements:
Operating Frequency:

Channel:

802.11be


MCS0

61


3 Meters

5935MHz

2

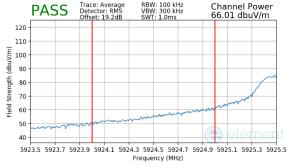


Plot 7-214. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 242T)

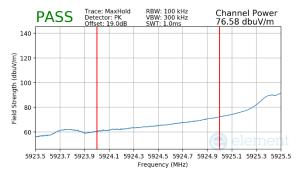

Plot 7-215. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 242T)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index
Distance of Measurements:
Operating Frequency:
Channel:

802.11be
MCS0
61
3 Meters
7115MHz
233

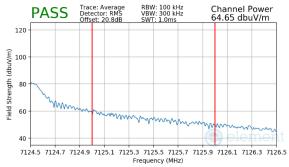

Plot 7-216. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 242T)



Plot 7-217. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 242T)


FCC ID: A3LSMS936B		MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 194 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Fage 194 01 202
O COOL EL EMENT			1100000010110010




7.8.6 MIMO Radiated Band Edge Measurements (40MHz BW – Full Tone – 484T)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index
Distance of Measurements:
Operating Frequency:
Channel:

802.11be
MCS0
65
3 Meters
5965MHz
3

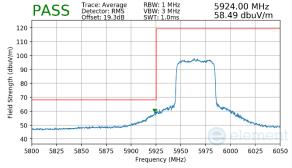


Plot 7-218. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 484T)

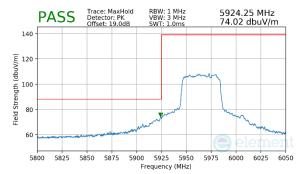


Plot 7-219. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 484T)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index
Distance of Measurements:
Operating Frequency:
Channel:

802.11be
MCS0
65
3 Meters
7085MHz
227

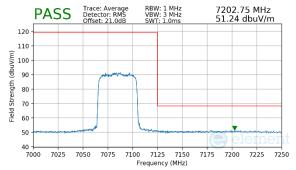

Plot 7-220. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 484T)

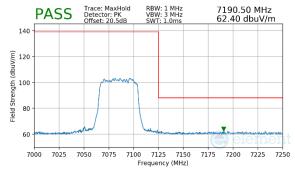

Plot 7-221. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 484T)


FCC ID: A3LSMS936B		MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 195 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	rage 190 01 202
C COCA EL EMENT	00/00/21 11/00/2021	T Chaple Handest	11000001011001




7.8.7 MIMO Radiated Band Edge Measurements (80MHz BW - Full Tone - 996T)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index
Distance of Measurements:
Operating Frequency:
Channel:

802.11be
MCS0
67
3 Meters
5985MHz
7

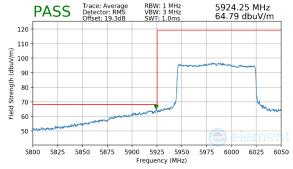

Plot 7-222. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 996T)

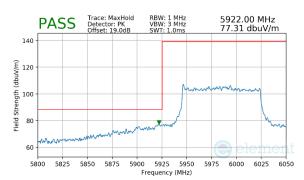


Plot 7-223. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 996T)

Worst Case Mode:


Worst Case Transfer Rate:

RU Index
Distance of Measurements:
Operating Frequency:
Channel:

802.11be
MCS0
67
3 Meters
7025MHz
215

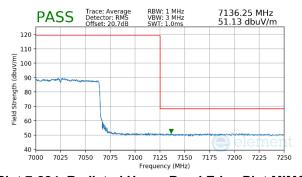

Plot 7-224. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 996T)

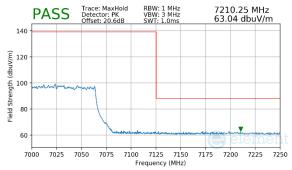

Plot 7-225. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 996T)

FCC ID: A3LSMS936B		MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 196 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Fage 190 01 202
1W2400200000-20.A3L	09/03/24 - 11/00/2024	Fortable Halluset	1/000001011001



7.8.8 MIMO Radiated Band Edge Measurements (80MHz BW – MRU – 484+242T)

Worst Case Mode:

Worst Case Transfer Rate:

RU Index

Distance of Measurements:

Operating Frequency:

Channel:

802.11be


MCS0

93


3 Meters

5985MHz

7

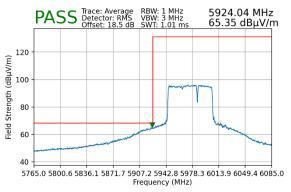

Plot 7-226. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 484+242T)

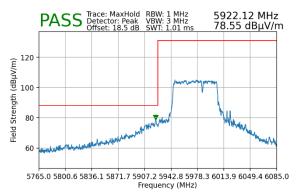

Plot 7-227. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 484+242T)

Worst Case Mode:

Worst Case Transfer Rate:

RU Index

Distance of Measurements:

Operating Frequency:

Channel:

802.11be


MCS0

91


3 Meters

7025MHz

215

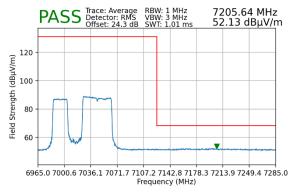

Plot 7-228. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 484+242T)

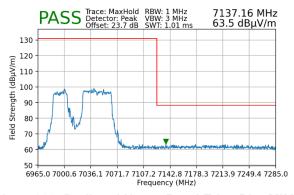

Plot 7-229. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 484+242T)

FCC ID: A3LSMS936B		MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dago 107 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	rage 197 01 202
			Page 197



7.8.9 MIMO Radiated Band Edge Measurements (160MHz BW – Full Tone – 2x996T)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index
Distance of Measurements:
Operating Frequency:
Channel:

802.11be
MCS0
67
3 Meters
6025MHz
15




Plot 7-230. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 2x996T)




Plot 7-231. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 2x996T)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index
Distance of Measurements:
Operating Frequency:
Channel:

802.11be
MCS0
67
3 Meters
6985MHz
207

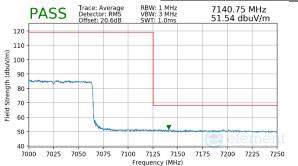

Plot 7-232. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 2x996T)

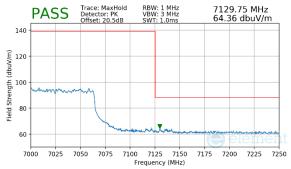

Plot 7-233. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 2x996T)


FCC ID: A3LSMS936B		MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 198 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Fage 190 01 202
0.0004 EL EMENT	00/00/21 11/00/2024	1 Ottable Hallacot	1/00000101/001




7.8.10 MIMO Radiated Band Edge Measurements (160MHz BW – MRU – 996+484T)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index
Distance of Measurements:
Operating Frequency:
Channel:


802.11be
MCS0
95
3 Meters
6025MHz
15

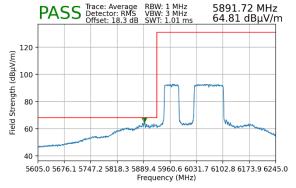


Plot 7-234. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 996+484T)

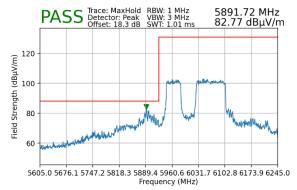


Plot 7-235. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 996+484T)

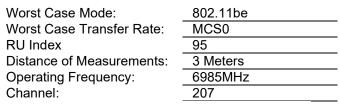

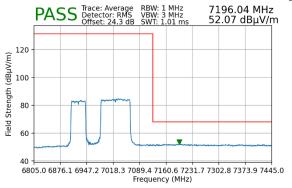

Plot 7-236. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 996+484T)

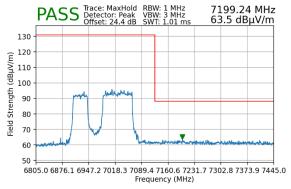

Plot 7-237. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 996+484T)


FCC ID: A3LSMS936B		MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 199 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	raye 199 01 202
O COOL ELEMENT	•	•	1/0 0 00/04/00/40




7.8.11 MIMO Radiated Band Edge Measurements (320MHz BW – Full Tone – 4*996T)

Worst Case Mode:
Worst Case Transfer Rate:
RU Index
Distance of Measurements:
Operating Frequency:
Channel:


802.11ax
MCS0
67
3 Meters
6025MHz
15

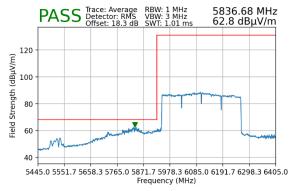


Plot 7-238. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 4*996T)

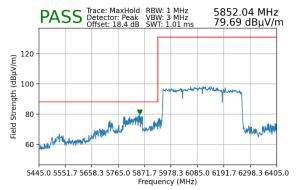


Plot 7-239. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 4*996T)

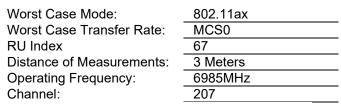

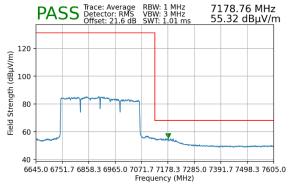

Plot 7-240. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 4*996T)

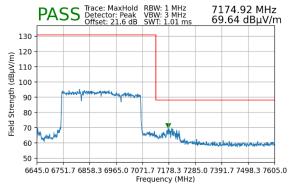

Plot 7-241. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 4*996T)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager		
Test Report S/N:	Test Dates:	EUT Type:	Page 200 of 202		
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Fage 200 01 202		
V 0 0 00 0 1 5 1 5 1 5 1 5 1 5 1 5 1 5 1					



7.8.12 MIMO Radiated Band Edge Measurements (320MHz BW – MRU – 3*996+484T)

 Worst Case Mode:
 802.11ax


 Worst Case Transfer Rate:
 MCS0

 RU Index
 10105


 Distance of Measurements:
 3 Meters

 Operating Frequency:
 6025MHz


 Channel:
 15

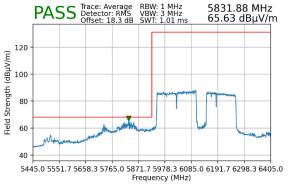


Plot 7-242. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5 – 3*996+484T)

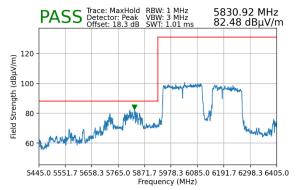


Plot 7-243. Radiated Lower Band Edge Plot MIMO (Peak – UNII Band 5 – 3*996+484T)

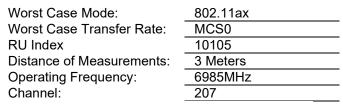

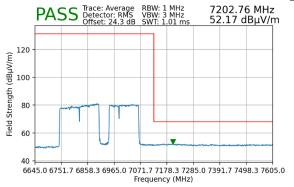

Plot 7-244. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8 – 3*996+484T)

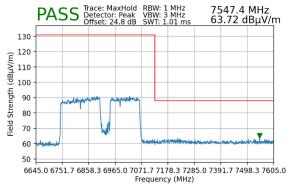

Plot 7-245. Radiated Upper Band Edge Plot MIMO (Peak – UNII Band 8 – 3*996+484T)

FCC ID: A3LSMS936B	MEASUREMENT REPORT		Approved by: Technical Manager		
Test Report S/N:	Test Dates:	EUT Type:	Page 201 of 202		
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset			
0.0004 ELEMENT					



8 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMS936B** is in compliance with FCC Part Subpart E (15.407) of the FCC rules for operation as a client device.

FCC ID: A3LSMS936B		MEASUREMENT REPORT	
Test Report S/N:	Test Dates:	EUT Type:	Page 202 of 202
1M2408260066-20.A3L	09/03/24 - 11/06/2024	Portable Handset	Fage 202 01 202
© 2024 ELEMENT			V 9.0 02/01/2019