



**FCC CFR47 PART 15 SUBPART C  
INDUSTRY CANADA RSS-247 ISSUE 2**

**Bluetooth**

**CERTIFICATION TEST REPORT**

**FOR**

**BT/BLE and DTS b/g/n Tablet**

**MODEL NUMBER : SM-T230NZ**

**FCC ID: A3LSMT230NZ**

**IC : 649E-SMT230NZ**

**REPORT NUMBER: 4788321149-E3V1**

**ISSUE DATE: FEB 22, 2018**

*Prepared for*

**SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 16677, KOREA**

*Prepared by*

**UL Korea, Ltd.**

**26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea**

**Suwon Test Site: UL Korea, Ltd. Suwon Laboratory**

**218 Maeyeong-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16675, Korea**

**TEL: (031) 337-9902**

**FAX: (031) 213-5433**



**ACCREDITED\***

Testing  
Laboratory

**TL-637**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	02/22/18	Initial issue	Junwhan Lee

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b>	<b>5</b>
<b>2. TEST METHODOLOGY</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY</b>	<b>6</b>
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	7
<b>5. EQUIPMENT UNDER TEST</b>	<b>8</b>
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. WORST-CASE CONFIGURATION AND MODE	8
5.5. DESCRIPTION OF TEST SETUP	9
<b>6. TEST AND MEASUREMENT EQUIPMENT</b>	<b>11</b>
<b>7. REFERENCE MEASUREMENT RESULTS</b>	<b>12</b>
7.1. 20 dB AND 99% BANDWIDTH	12
7.1.1. BASIC DATA RATE GFSK MODULATION	12
7.1.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION	12
7.1.3. ENHANCED DATA RATE 8PSK MODULATION	12
7.1.4. 20 dB AND 99% BANDWIDTH PLOTS	13
<b>8. SUMMARY TABLE</b>	<b>16</b>
<b>9. ANTENNA PORT TEST RESULTS</b>	<b>17</b>
9.1. HOPPING FREQUENCY SEPARATION	17
9.2. NUMBER OF HOPPING CHANNELS	18
9.3. AVERAGE TIME OF OCCUPANCY	20
9.4. OUTPUT POWER	24
9.4.1. BASIC DATA RATE GFSK MODULATION	24
9.4.2. ENHANCED DATA RATE PI/4-DPSK MODULATION	24
9.4.3. ENHANCED DATA RATE 8PSK MODULATION	24
9.4.4. OUTPUT POWER PLOTS	25
9.5. AVERAGE POWER	28
9.5.1. BASIC DATA RATE GFSK MODULATION	28
9.5.2. DATA RATE PI/4-DQPSK MODULATION	28
9.5.3. ENHANCED DATA RATE 8PSK MODULATION	28

---

9.6.	<i>CONDUCTED SPURIOUS EMISSIONS</i> .....	29
9.6.1.	BASIC DATA RATE GFSK MODULATION.....	30
<b>10.</b>	<b>RADIATED TEST RESULTS</b> .....	<b>42</b>
10.1.	<i>LIMITS AND PROCEDURE</i> .....	42
10.2.	<i>TRANSMITTER ABOVE 1 GHz</i> .....	44
10.2.1.	BASIC DATA RATE GFSK MODULATION .....	44
10.2.2.	ENHANCED DATA RATE 8PSK MODULATION .....	54
10.3.	<i>WORST-CASE BELOW 1 GHz</i> .....	64
<b>11.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS</b> .....	<b>66</b>
<b>12.</b>	<b>SETUP PHOTOS</b> .....	<b>71</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.  
**EUT DESCRIPTION:** BT/BLE and DTS b/g/n Tablet  
**MODEL NUMBER:** SM-T230NZ  
**SERIAL NUMBER:** R32K100140R (CONDUCTED);  
R32K100146E (RADIATED);  
**DATE TESTED:** FEB 02, 2018 - FEB 20, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-247 Issue 2	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:

Tested By:



SungGil Park  
Suwon Lab Engineer  
UL Korea, Ltd.



Junwhan Lee  
Suwon Lab Engineer  
UL Korea, Ltd.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. IC RSS-GEN Issue 4
4. IC RSS-247 Issue 2
5. FCC DA 00-705 Filling and measurement guidelines for FHSS systems
6. ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro
<input type="checkbox"/> Chamber 1
<input type="checkbox"/> Chamber 2
<input checked="" type="checkbox"/> Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	3.86 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a BT/BLE and DTS b/g/n Tablet.  
 This test report addresses the DSS (BT) operational mode.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2402 - 2480	Basic GFSK	Average	8.812	7.607
		Peak	8.917	7.793
	Enhanced Pi/4-DPSK	Average	5.629	3.655
		Peak	7.907	6.176
	Enhanced 8PSK	Average	5.657	3.679
		Peak	8.299	6.759

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal antenna, with a maximum gain of 0 dBi.

### 5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 9.5.

All radiated and power line conducted tests were performed connected with earphone and charger for evaluation of worst case mode.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	ETA0U83EWE	DK2K109VS/A -E	N/A
Data Cable	SAMSUNG	EP-DN930CWE	N/A	N/A
Earphone	SAMSUNG	EHS64AVFWE	N/A	N/A


### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	2	Mini-Jack	Unshielded	1.2m	N/A

### TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.  
 Test software enable BT communications.

**SETUP DIAGRAM FOR TESTS**

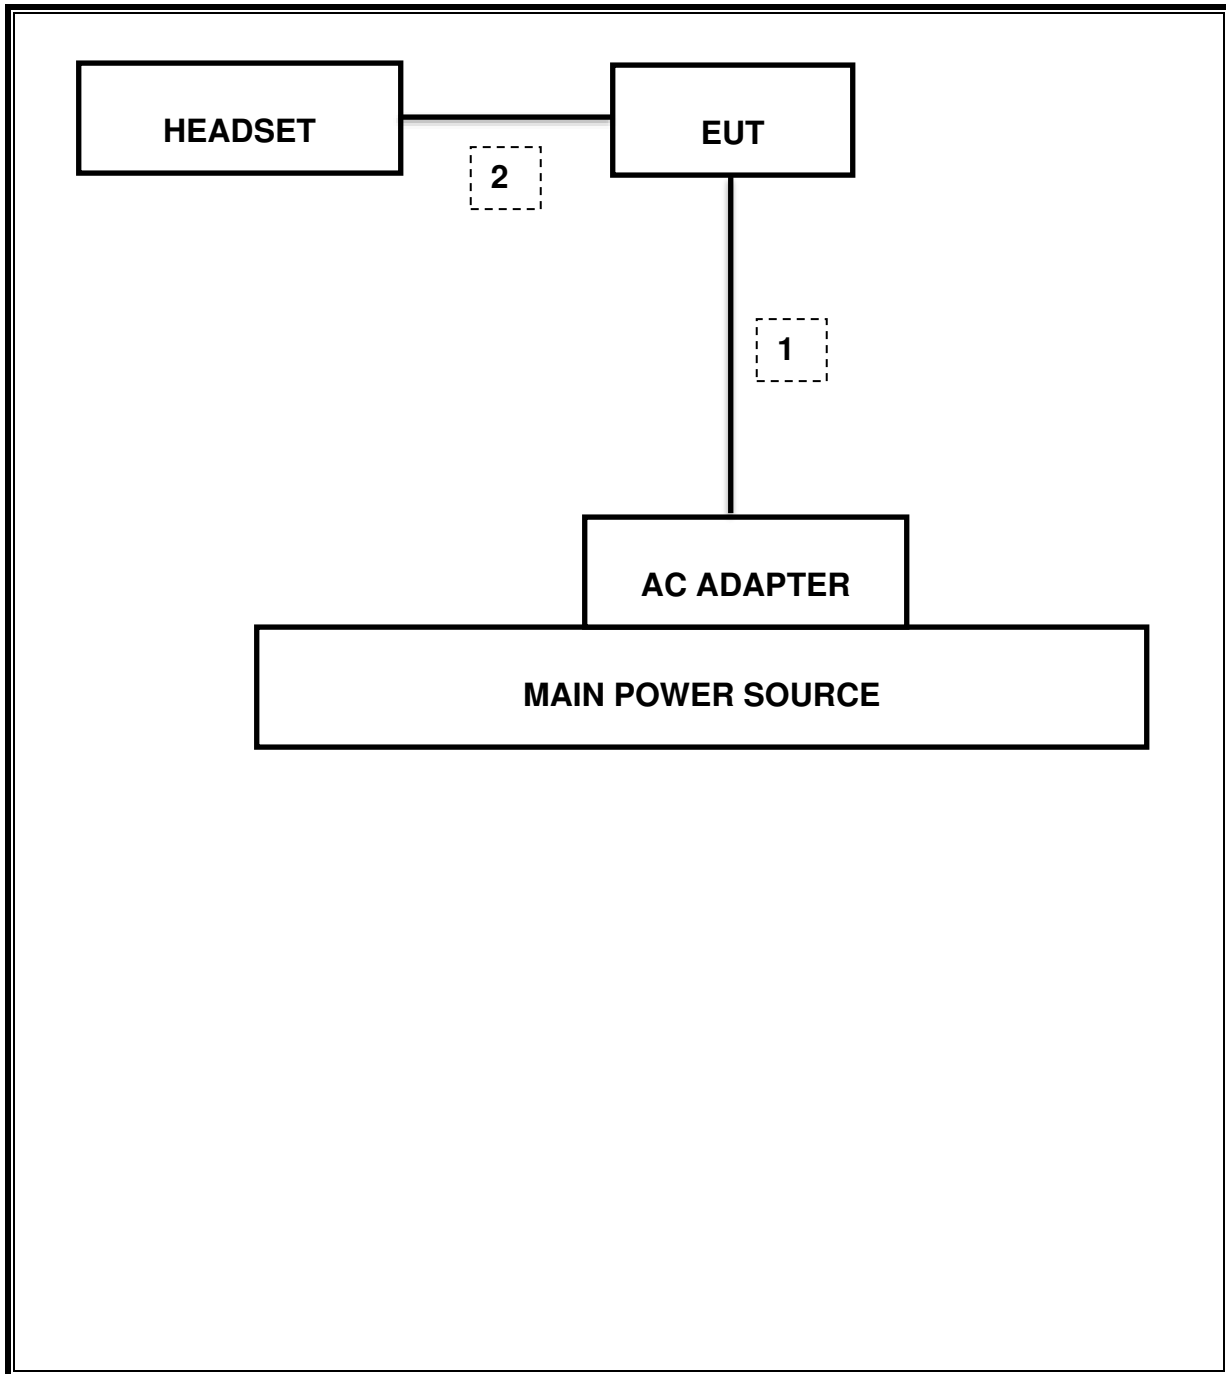

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-31-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-14-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-31-19
Antenna, Horn, 18 GHz	ETS	3115	00167211	10-14-18
Antenna, Horn, 18 GHz	ETS	3115	00161451	03-10-19
Antenna, Horn, 18 GHz	ETS	3117	00168724	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00168717	11-29-18
Antenna, Horn, 18 GHz	ETS	3117	00205959	05-31-19
Antenna, Horn, 40 GHz	ETS	3116C	00166155	12-04-19
Antenna, Horn, 40 GHz	ETS	3116C	00168645	12-04-19
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	11-13-19
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-09-18
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-07-18
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-10-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-08-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-08-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-11-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-08-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-08-18
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-08-18
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	08-08-18
Combiner	WEINCHEL	1575	2152	08-08-18
Attenuator	PASTERNAK	PE7087-10	A001	08-08-18
Attenuator	PASTERNAK	PE7087-10	A008	08-08-18
Attenuator	PASTERNAK	PE7087-10	2	08-10-18
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-08-18
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-08-18
EMI Test Receive, 44 GHz	R&S	ESW44	101590	08-09-18
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-07-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-08-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-08-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-11-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-11-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-11-18
LISN	R&S	ENV-216	101837	08-09-18
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

## 7. REFERENCE MEASUREMENT RESULTS

### 7.1. 20 dB AND 99% BANDWIDTH

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

#### RESULTS

##### 7.1.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [kHz]
Low	2402	1.055	901.200
Mid	2441	1.054	904.420
High	2480	1.054	928.130
Worst		1.055	928.130

##### 7.1.2. ENHANCED DATA RATE Pi/4-DQPSK MODULATION


Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [MHz]
Low	2402	1.358	1.199
Mid	2441	1.360	1.200
High	2480	1.360	1.200
Worst		1.360	1.200

##### 7.1.3. ENHANCED DATA RATE 8PSK MODULATION


Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [MHz]
Low	2402	1.335	1.197
Mid	2441	1.320	1.196
High	2480	1.331	1.196
Worst		1.335	1.197

### 7.1.4. 20 dB AND 99% BANDWIDTH PLOTS


#### GFSK BANDWIDTH

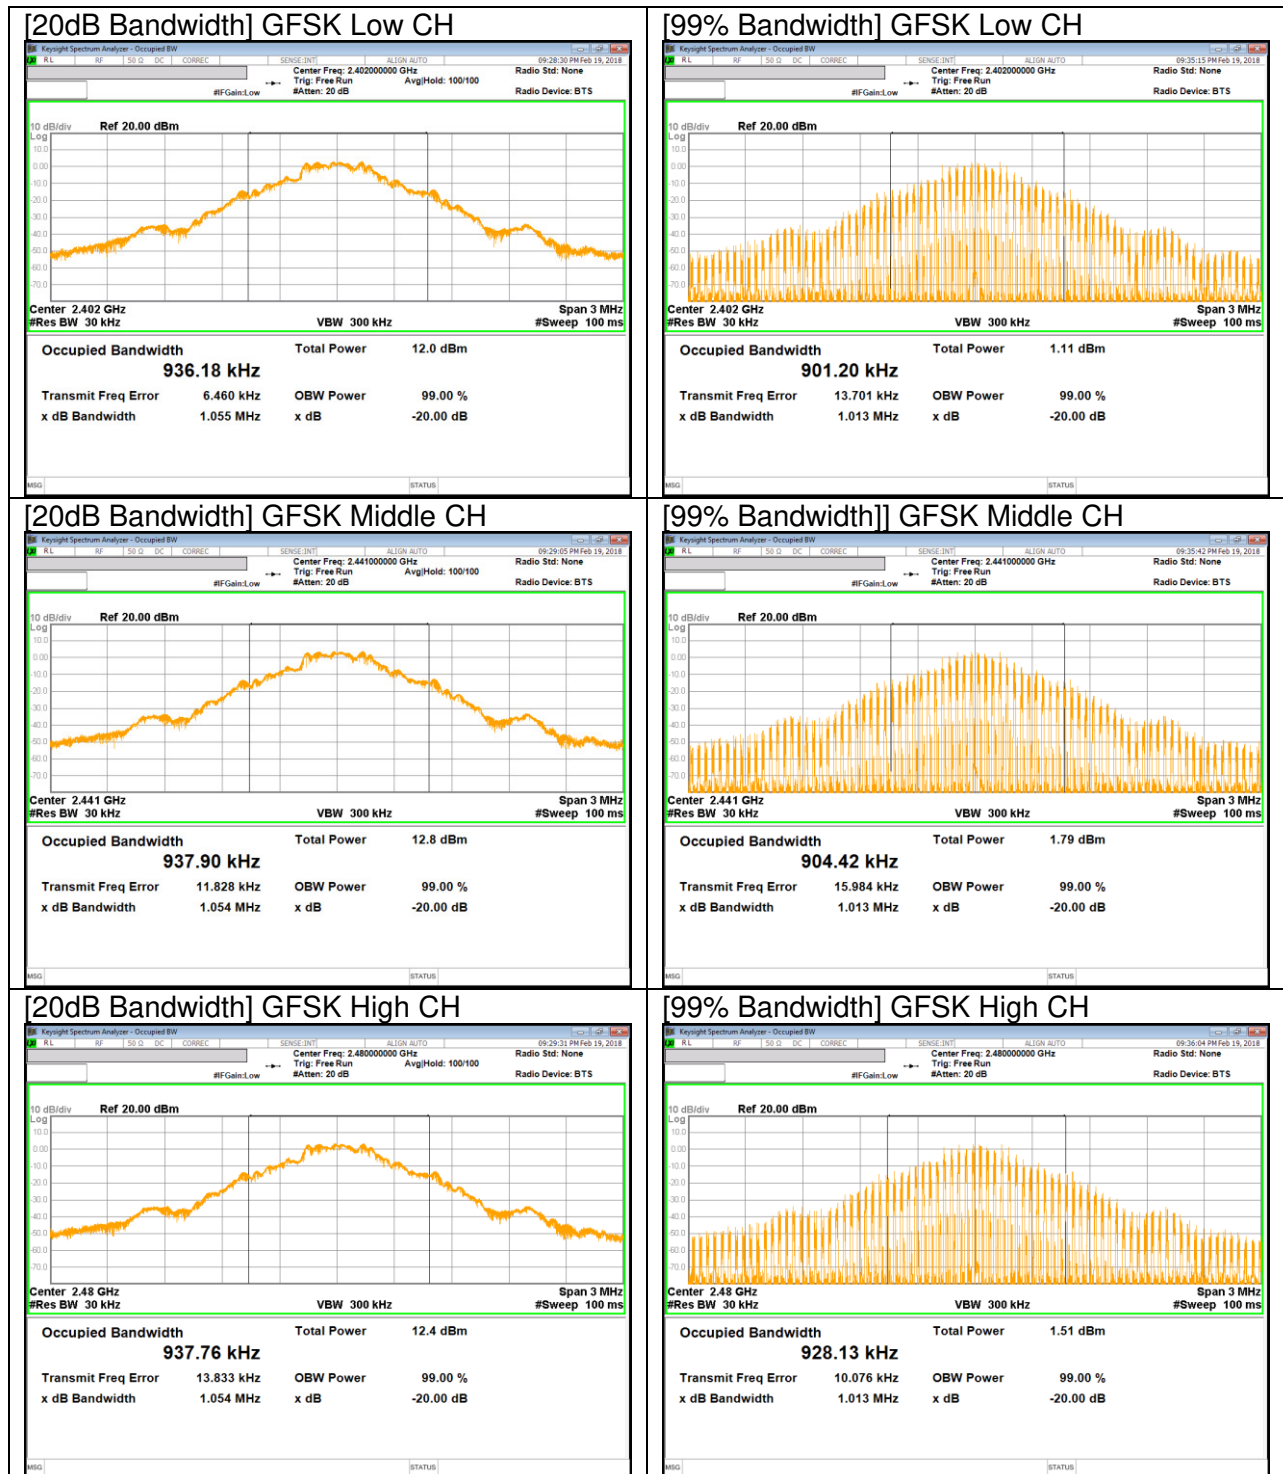

**Pi/4-DQPSK BANDWIDTH**

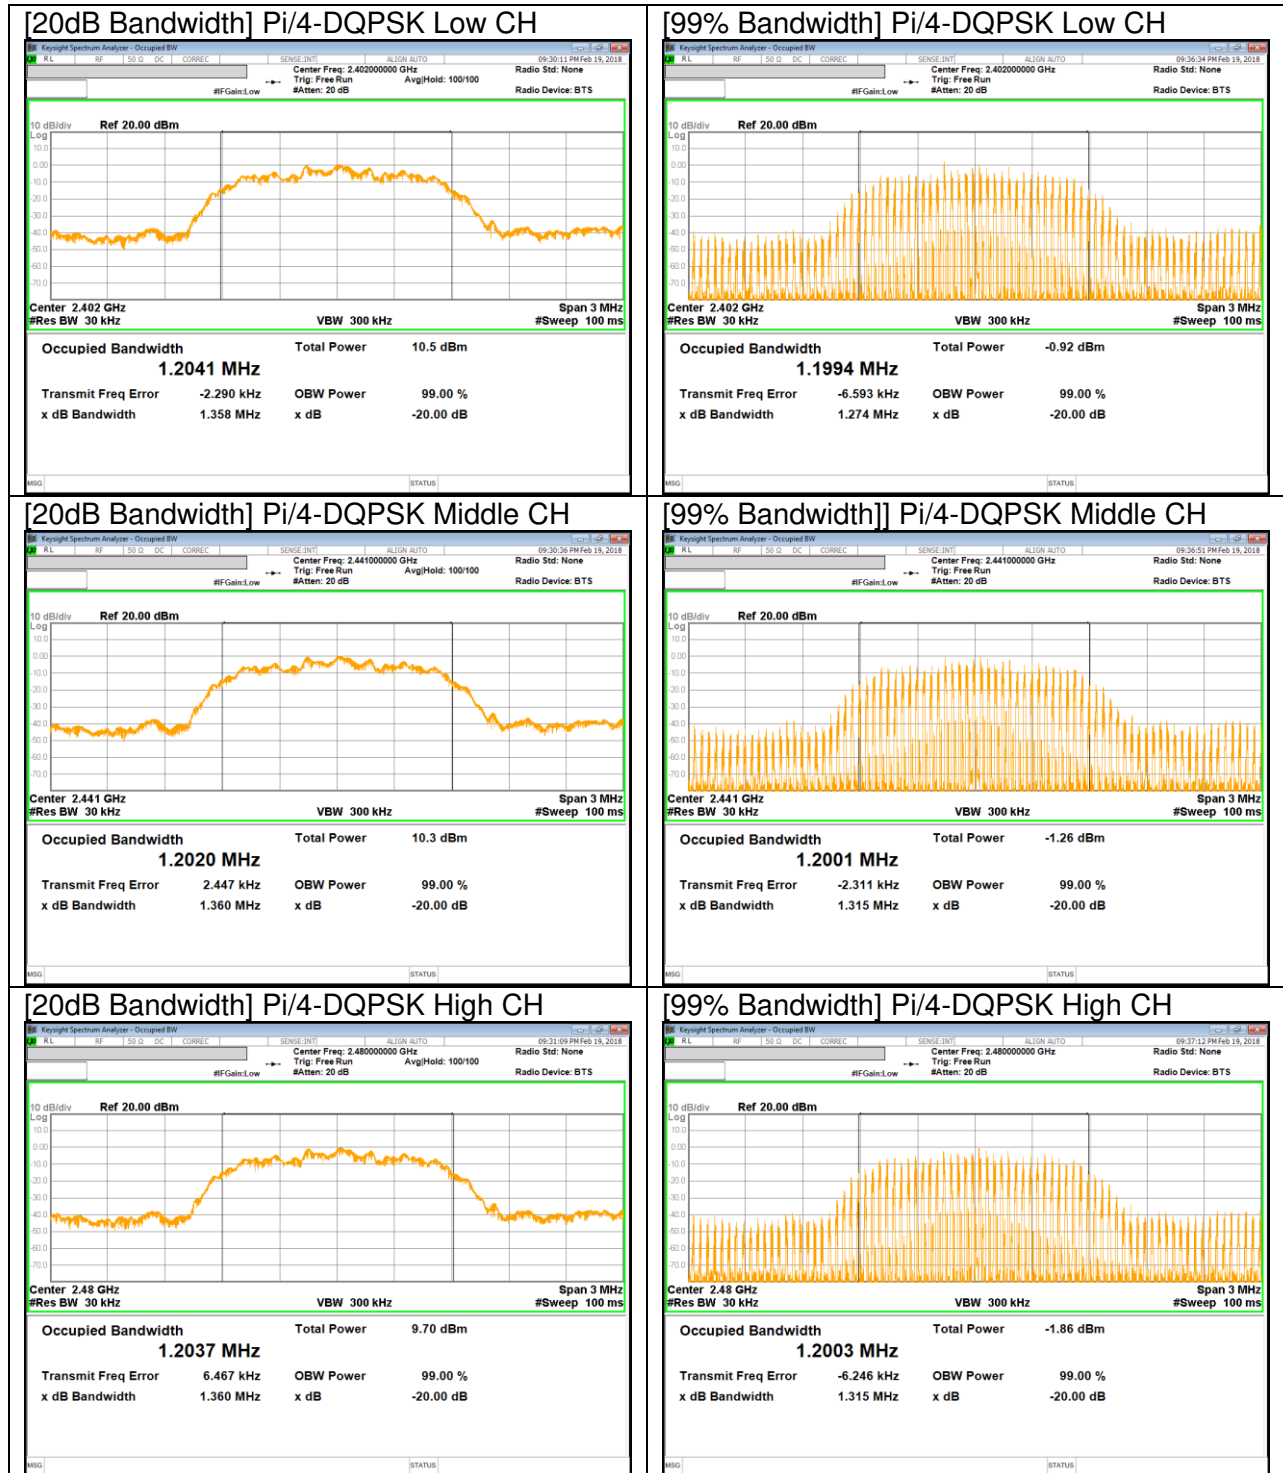

**8PSK BANDWIDTH**

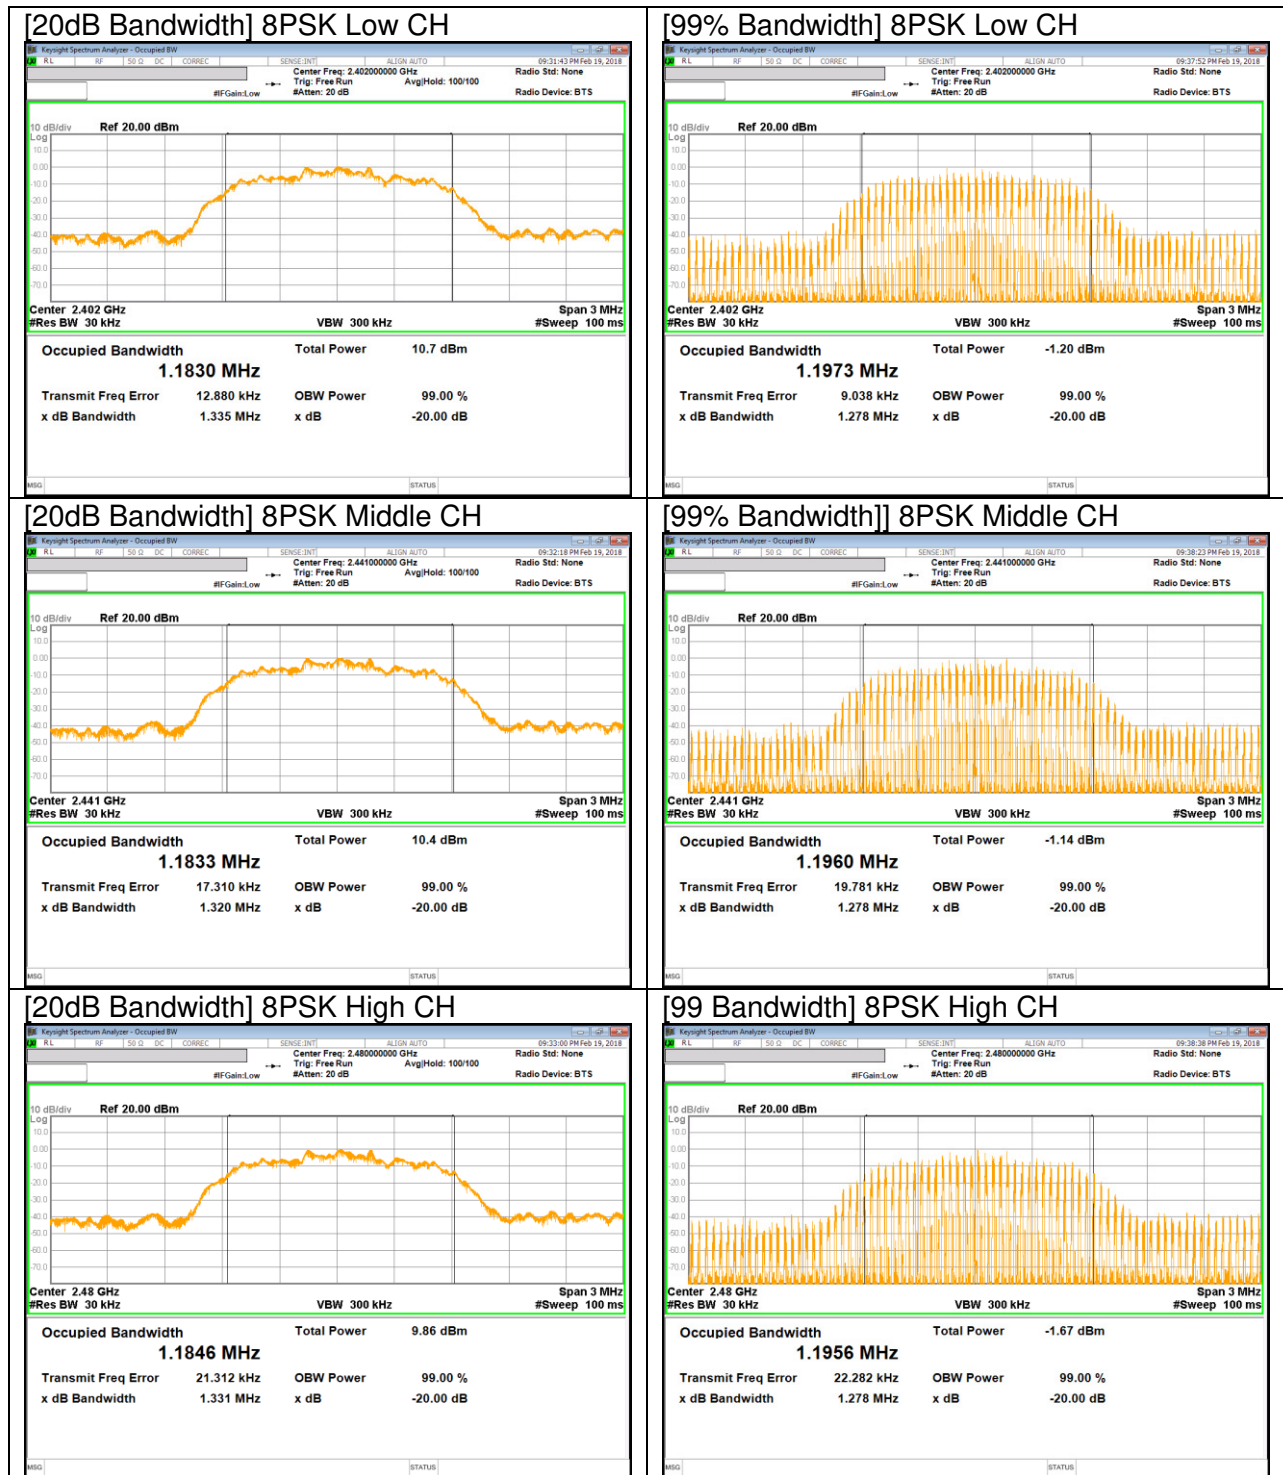

## 8. SUMMARY TABLE

FCC Part Section	IC Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1051, 15.247 (d)	RSS-247 5.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-41.576 dBm
15.247 (b)(1)	RSS-247 5.1(b)	TX conducted output power	<21dBm		Pass	8.917 dBm (Peak)
15.247 (a)(1)	RSS-247 5.1(b)	Hopping frequency separation	> 25KHz		Pass	1 MHz
15.247 (a)(1)(iii)	RSS-247 5.1(d)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79
15.247 (a)(1)(iii)	RSS-247 5.1(d)	Avg Time of Occupancy	< 0.4sec		Pass	0.34632 sec
15.207 (a)	RSS-GEN 8.8	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass	48.12 dBuV (Pk)
15.205, 15.209	RSS-GEN Clause 7 & 8.9	Radiated Spurious Emission	< 54dBuV/m	Radiated	Pass	40.07 dBuV/m (AV)

## 9. ANTENNA PORT TEST RESULTS

### 9.1. HOPPING FREQUENCY SEPARATION

#### LIMIT

FCC §15.247 (a) (1)  
IC RSS-247 §5.1 (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

#### RESULTS

#### HOPPING FREQUENCY SEPARATION PLOT

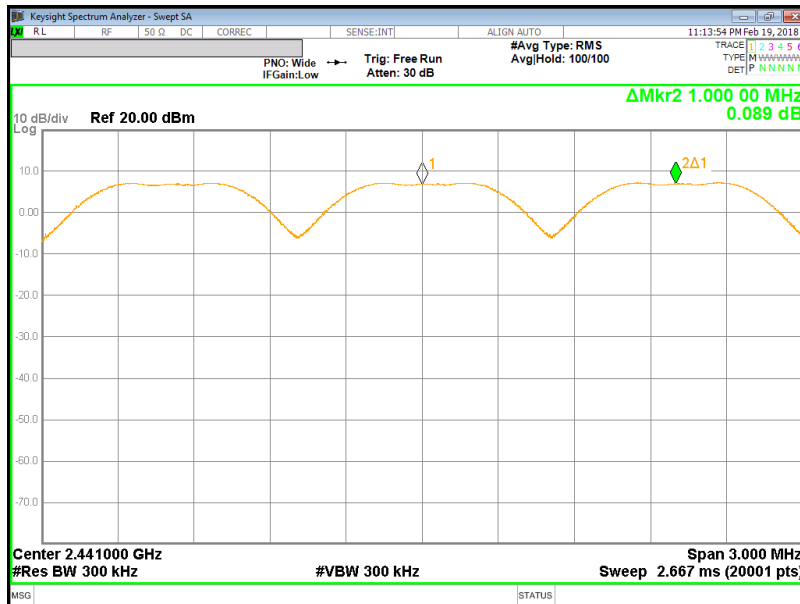

## 9.2. NUMBER OF HOPPING CHANNELS

### LIMIT

FCC §15.247 (a) (1) (iii)  
IC RSS-247 §5.1 (4)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

### RESULTS

Normal Mode: 79 Channels observed.

### NUMBER OF HOPPING CHANNELS PLOTS

#### NUMBER OF HOPPING CHANNELS (100 MHZ SPAN)





### 9.3. AVERAGE TIME OF OCCUPANCY

#### LIMIT

FCC §15.247 (a) (1) (iii)  
 IC RSS-247 §5.1 (4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$ .

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels \* 0.4 seconds) is equal to  $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$ .

#### RESULTS

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK Normal					
DH1	0.382	32	0.122336	0.4	-0.2777
DH3	1.638	16	0.262080	0.4	-0.1379
DH5	2.886	12	0.346320	0.4	-0.0537
GFSK AFH					
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK AFH					
DH1	0.382	8	0.030584	0.4	-0.36942
DH3	1.638	4	0.065520	0.4	-0.33448
DH5	2.886	3	0.086580	0.4	-0.31342

**DH1**

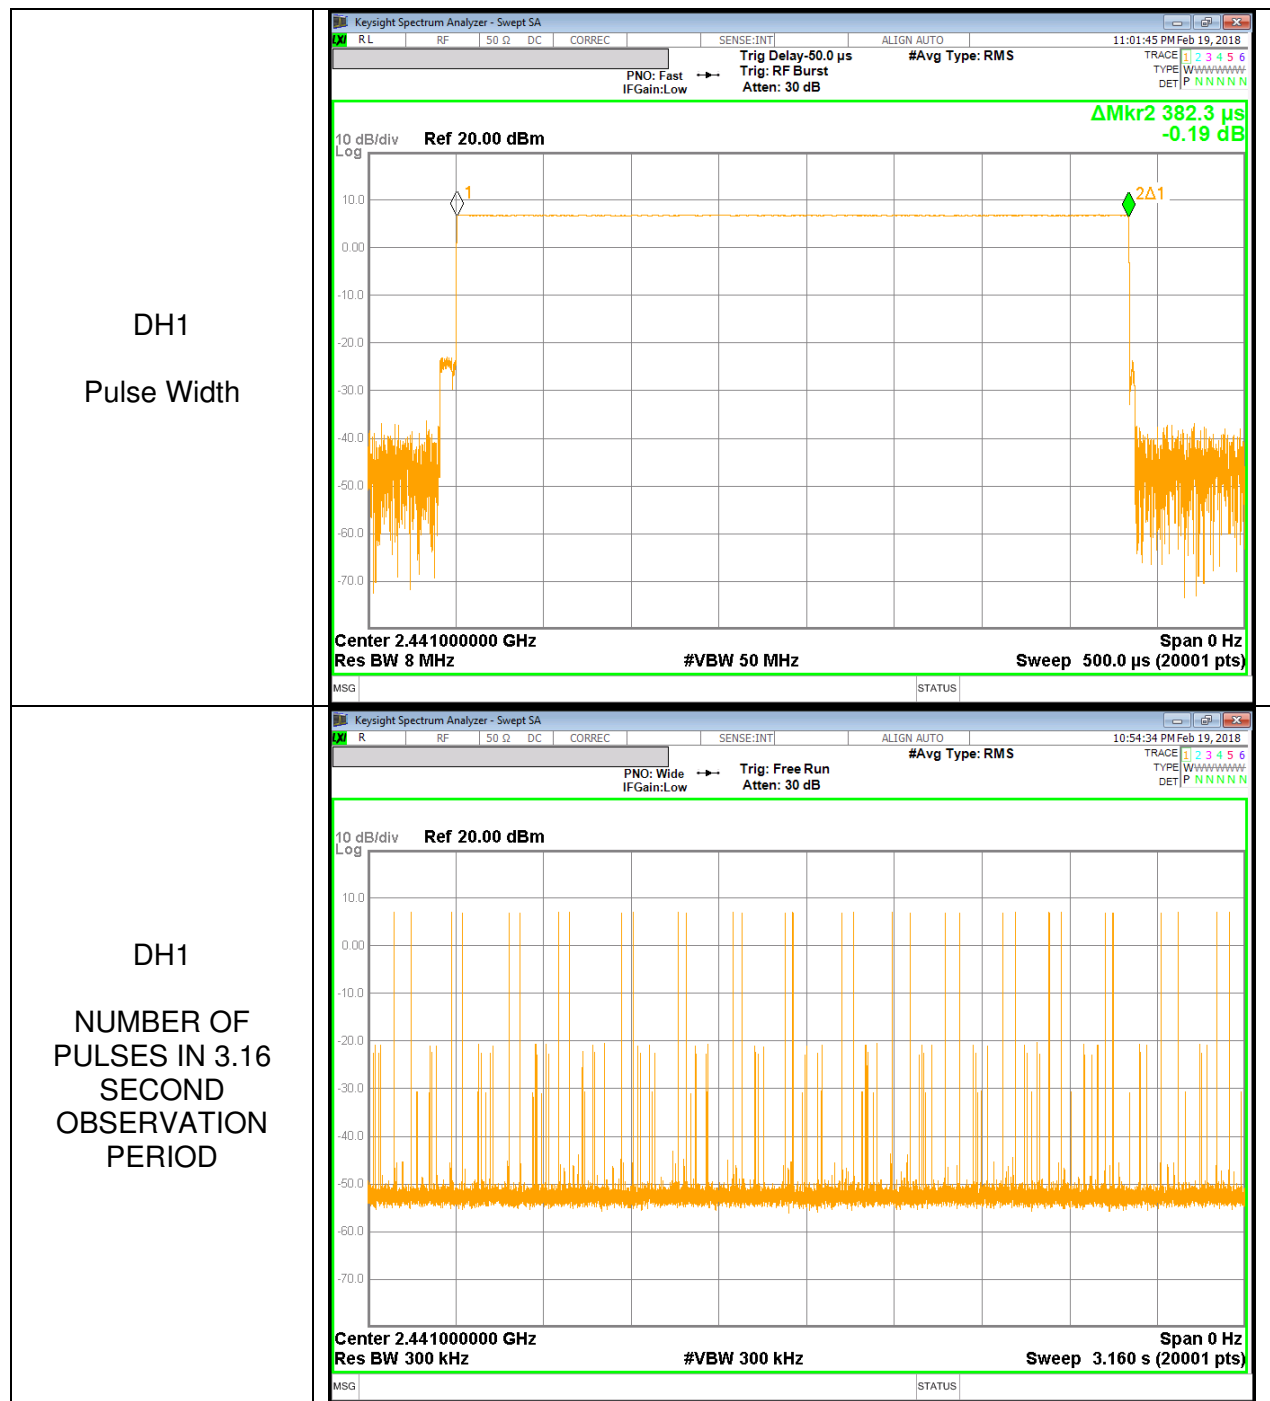





## 9.4. OUTPUT POWER

### LIMIT

§15.247 (b) (1)  
 IC RSS-247 §5.1 (2)

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

### RESULTS

#### 9.4.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	7.985	21	-13.015
Middle	2441	8.917	21	-12.083
High	2480	8.261	21	-12.739
Worst		8.917	21	-12.083

#### 9.4.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION


Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	7.856	21	-13.144
Middle	2441	7.907	21	-13.093
High	2480	7.003	21	-13.997
Worst		7.907	21	-13.093

#### 9.4.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	8.194	21	-12.806
Middle	2441	8.299	21	-12.701
High	2480	7.365	21	-13.635
Worst		8.299	21	-12.701

### 9.4.4. OUTPUT POWER PLOTS

#### GFSK OUTPUT POWER

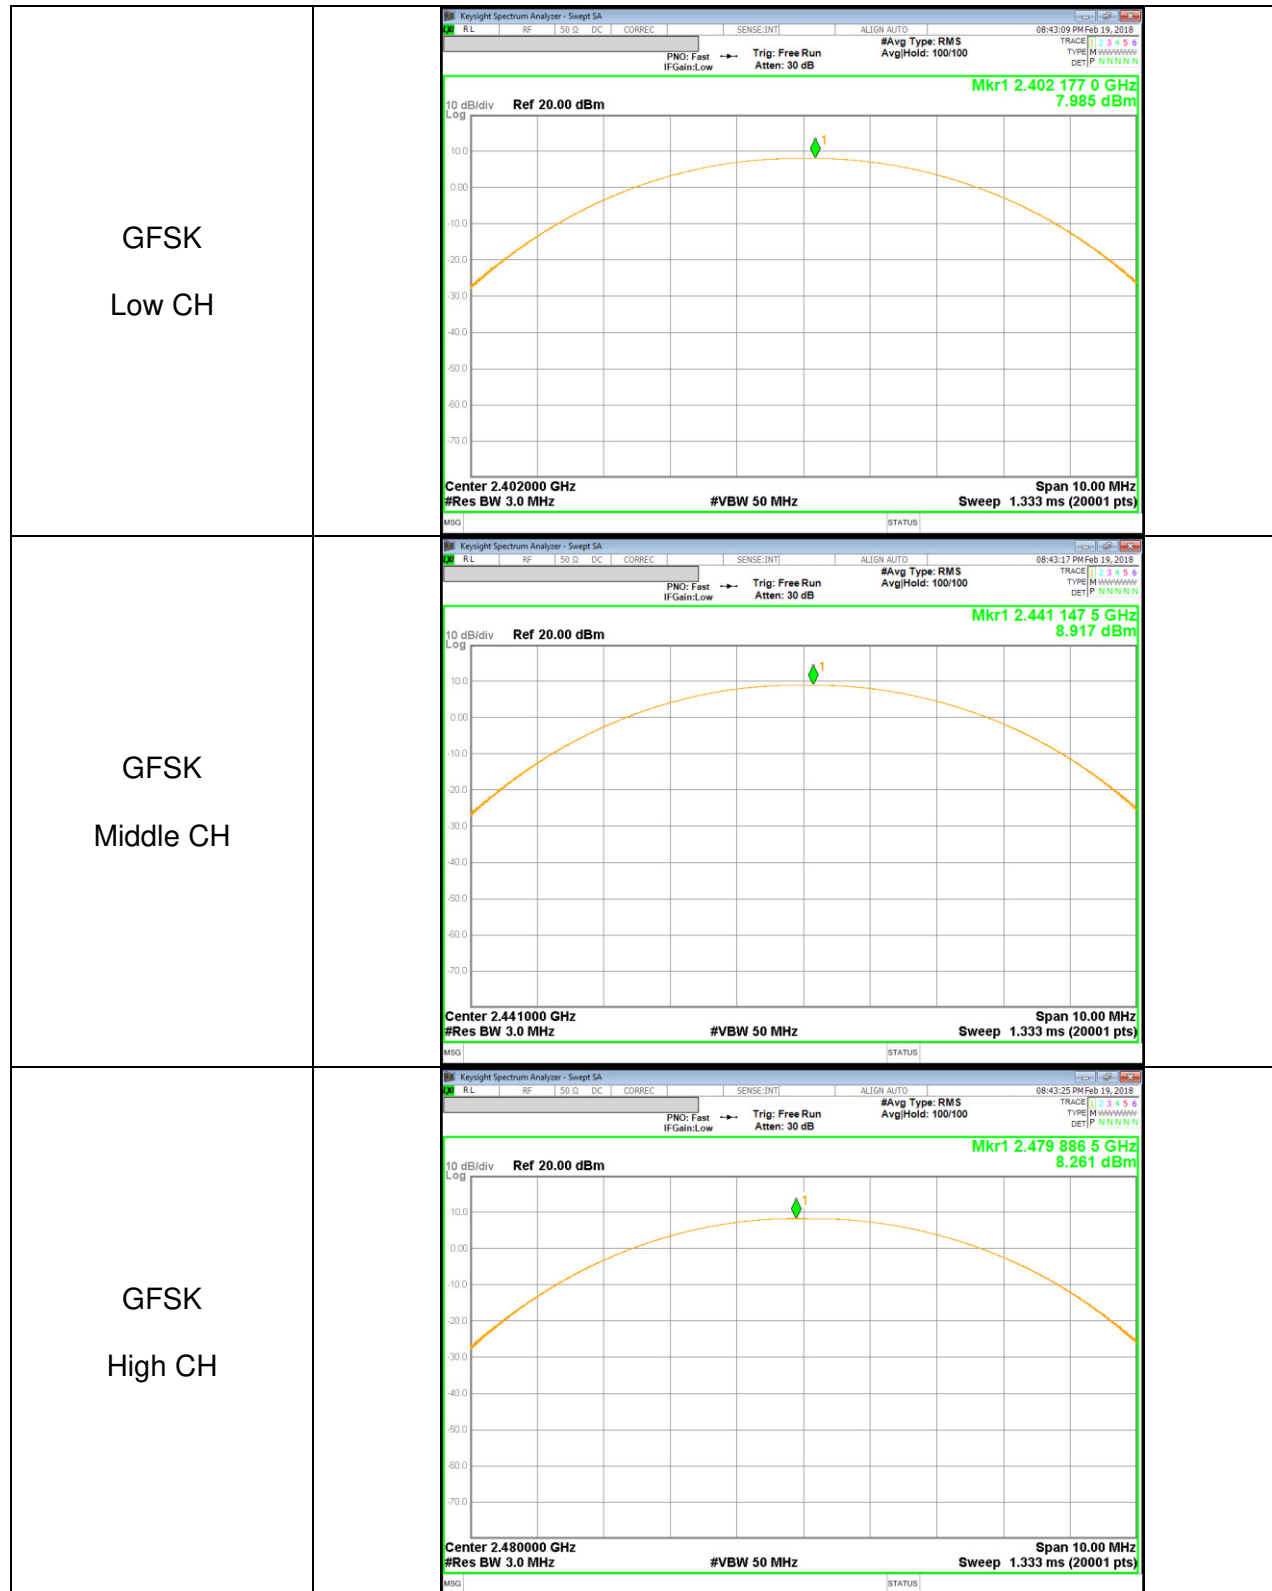

**Pi/4-DPSK OUTPUT POWER**

<p>Pi/4-DPSK Low CH</p>	<p>KeySight Spectrum Analyzer - Swept SA              08:43:39 PM Feb 19, 2018              #Avg Type: RMS              Avg/Hold: 100/100              Mkr1 2.401 933 0 GHz              7.856 dBm              Ref 20.00 dBm              Center 2.402000 GHz              #Res BW 3.0 MHz              #VBW 50 MHz              Span 10.00 MHz              Sweep 1.333 ms (20001 pts)</p>
<p>Pi/4-DPSK Middle CH</p>	<p>KeySight Spectrum Analyzer - Swept SA              08:43:48 PM Feb 19, 2018              #Avg Type: RMS              Avg/Hold: 100/100              Mkr1 2.441 218 5 GHz              7.907 dBm              Ref 20.00 dBm              Center 2.441000 GHz              #Res BW 3.0 MHz              #VBW 50 MHz              Span 10.00 MHz              Sweep 1.333 ms (20001 pts)</p>
<p>Pi/4-DPSK High CH</p>	<p>KeySight Spectrum Analyzer - Swept SA              08:43:58 PM Feb 19, 2018              #Avg Type: RMS              Avg/Hold: 100/100              Mkr1 2.480 100 0 GHz              7.003 dBm              Ref 20.00 dBm              Center 2.480000 GHz              #Res BW 3.0 MHz              #VBW 50 MHz              Span 10.00 MHz              Sweep 1.333 ms (20001 pts)</p>

**8PSK OUTPUT POWER**

<p>8PSK Low CH</p>	<p>KeySight Spectrum Analyzer - Swept SA              08:44:08 PM Feb 19, 2018              #Avg Type: RMS              Avg/Hold: 100/100              Mkr1 2.402 051 5 GHz              8.194 dBm              Ref 20.00 dBm              Center 2.402000 GHz              #Res BW 3.0 MHz              #VBW 50 MHz              Span 10.00 MHz              Sweep 1.333 ms (20001 pts)</p>
<p>8PSK Middle CH</p>	<p>KeySight Spectrum Analyzer - Swept SA              08:44:18 PM Feb 19, 2018              #Avg Type: RMS              Avg/Hold: 100/100              Mkr1 2.441 037 0 GHz              8.299 dBm              Ref 20.00 dBm              Center 2.441000 GHz              #Res BW 3.0 MHz              #VBW 50 MHz              Span 10.00 MHz              Sweep 1.333 ms (20001 pts)</p>
<p>8PSK High CH</p>	<p>KeySight Spectrum Analyzer - Swept SA              08:44:28 PM Feb 19, 2018              #Avg Type: RMS              Avg/Hold: 100/100              Mkr1 2.480 031 5 GHz              7.365 dBm              Ref 20.00 dBm              Center 2.480000 GHz              #Res BW 3.0 MHz              #VBW 50 MHz              Span 10.00 MHz              Sweep 1.333 ms (20001 pts)</p>

## 9.5. AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

### RESULTS

The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

#### 9.5.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	7.862	6.11
Middle	2441	8.812	7.61
High	2480	8.142	6.52

#### 9.5.2. DATA RATE PI/4-DQPSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	5.607	3.64
Middle	2441	5.629	3.66
High	2480	4.703	2.95

#### 9.5.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	5.625	3.65
Middle	2441	5.657	3.68
High	2480	4.721	2.97

## 9.6. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

FCC §15.247 (d)  
IC RSS-247 §5.5

Limit = -20 dBc

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.



### RESULTS

### 9.6.1. BASIC DATA RATE GFSK MODULATION

#### GFSK Mode

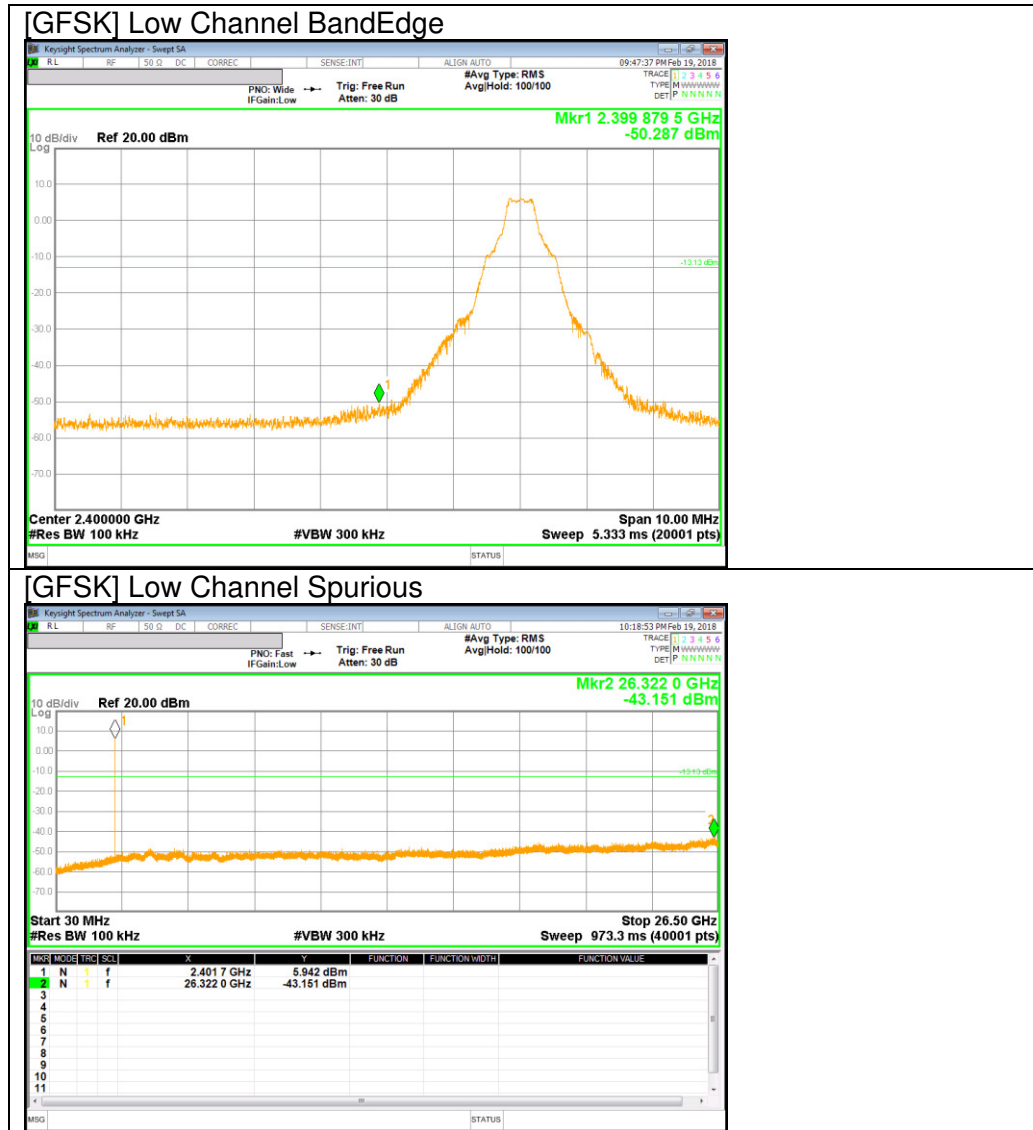


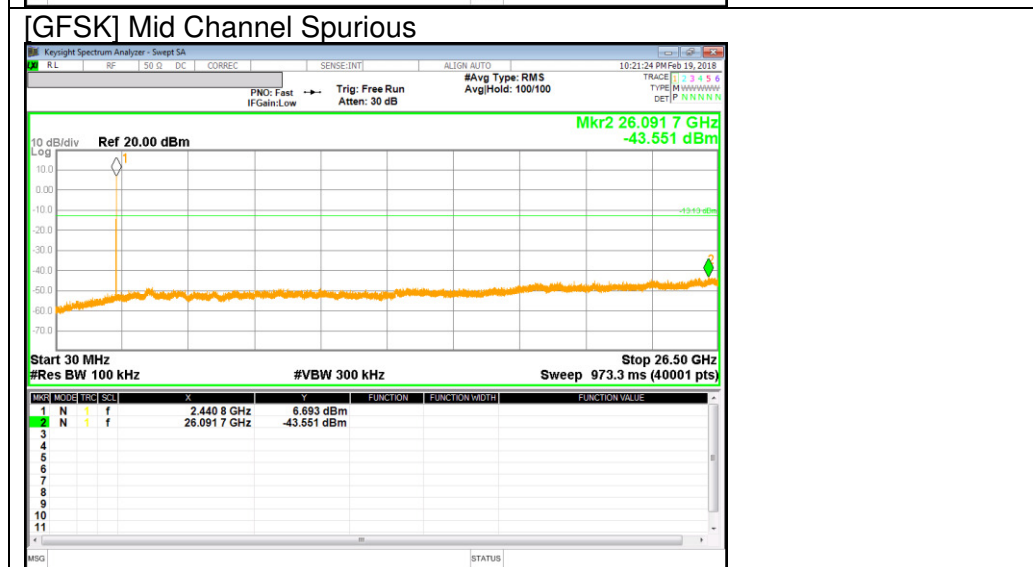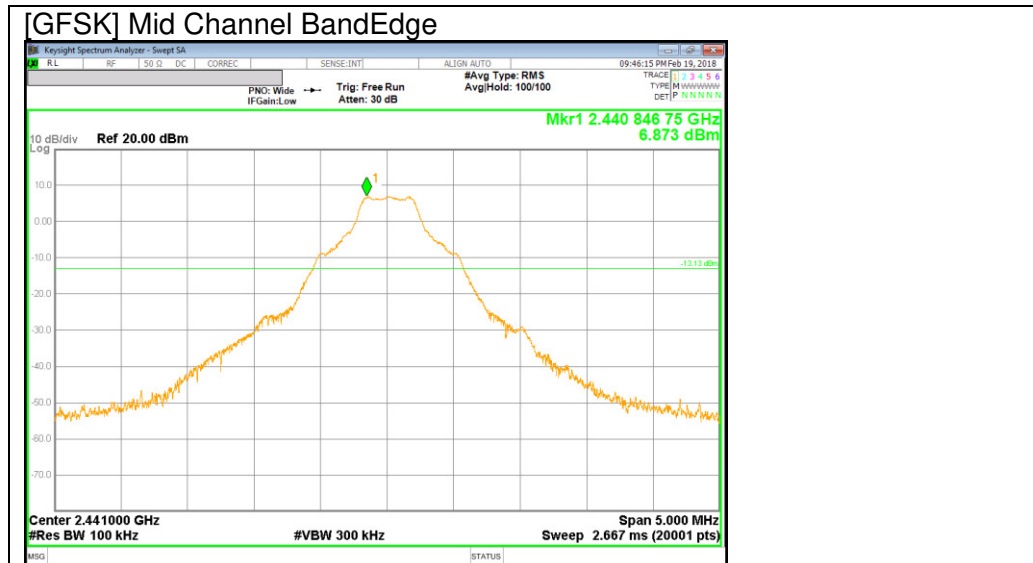

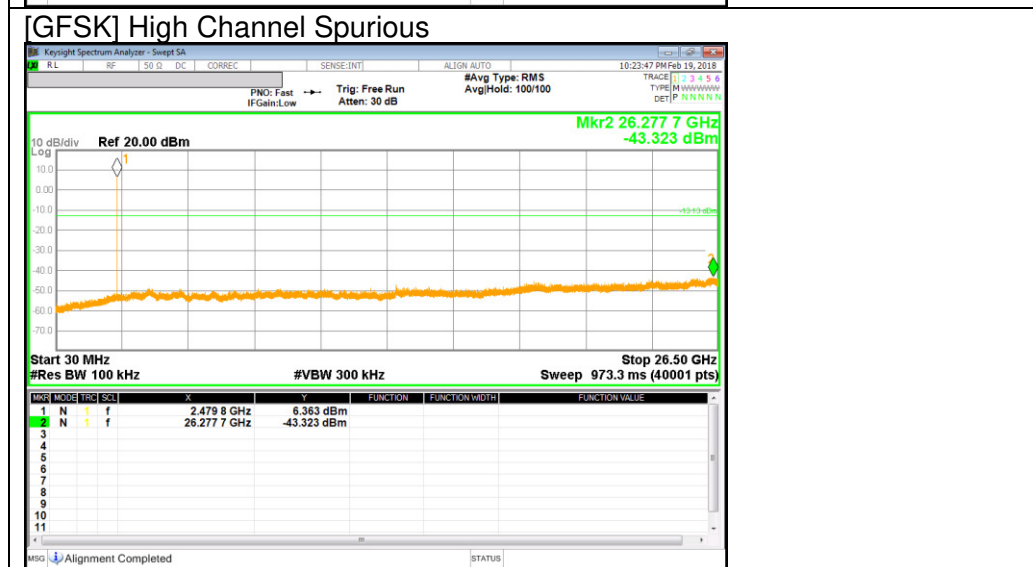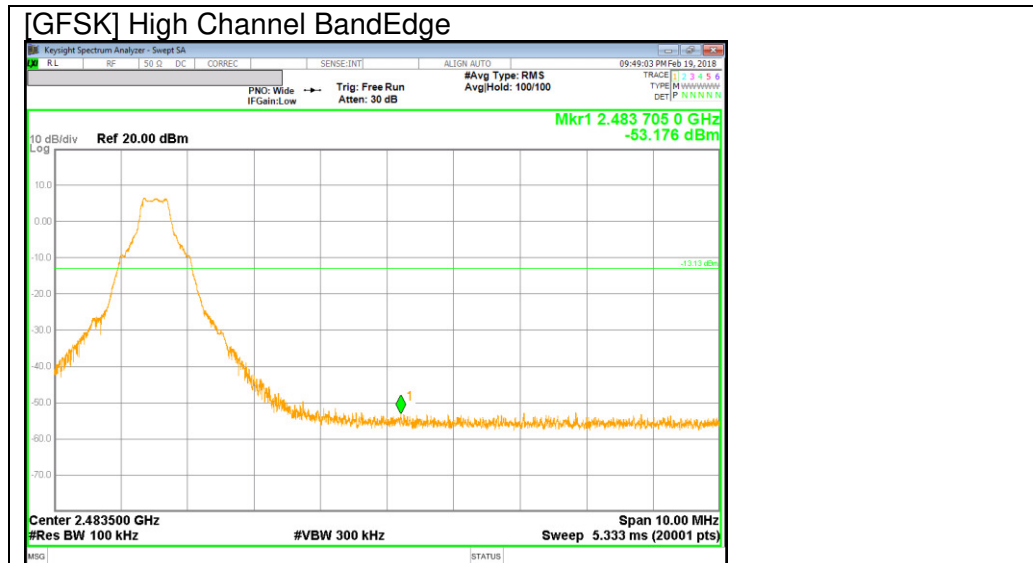


**BandEdge Emission at GFSK Hopping Mode**


[GFSK Hopping Mode] Low Channel BandEdge


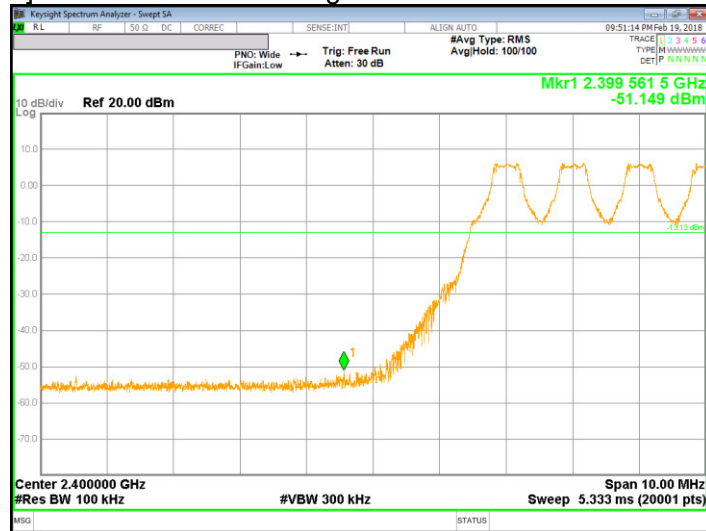




[GFSK Hopping Mode] High Channel BandEdge

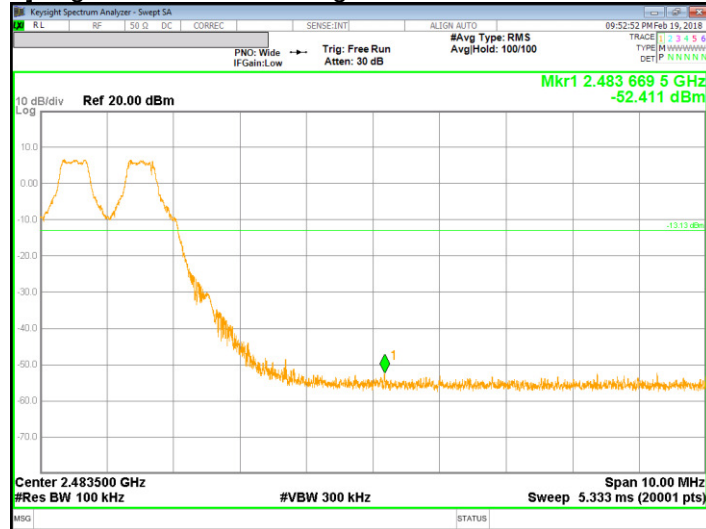

**PI/4-DQPSK Mode**

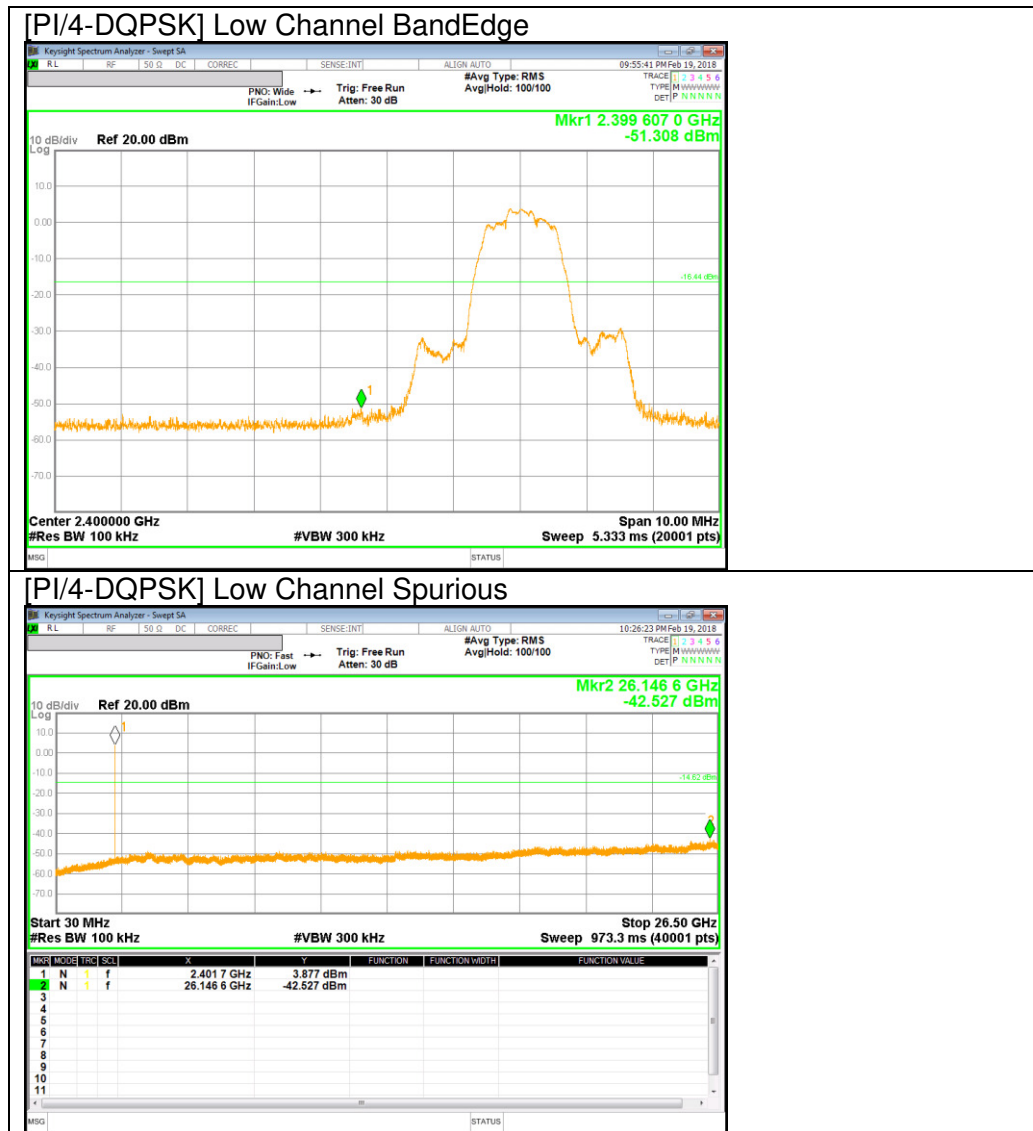


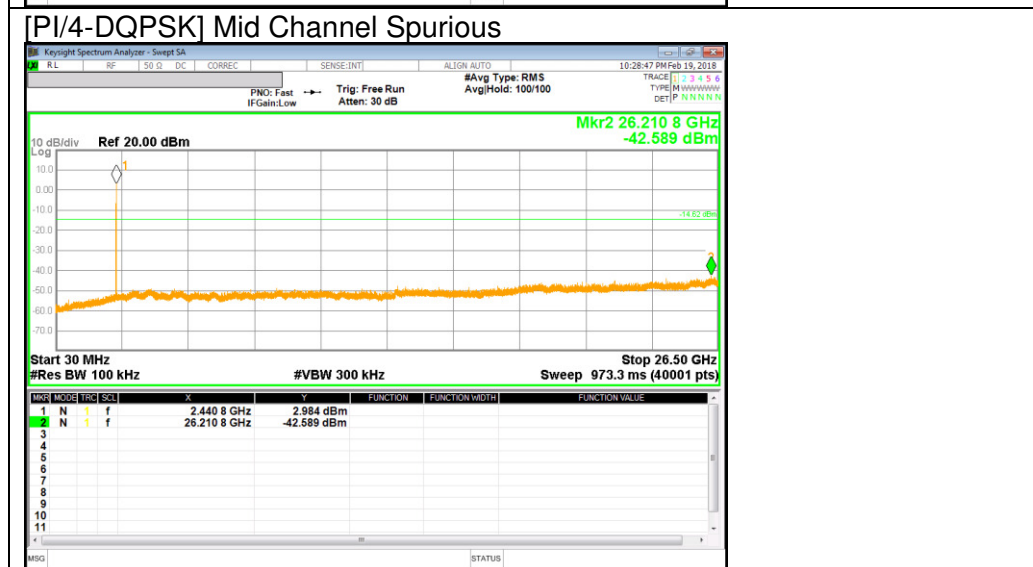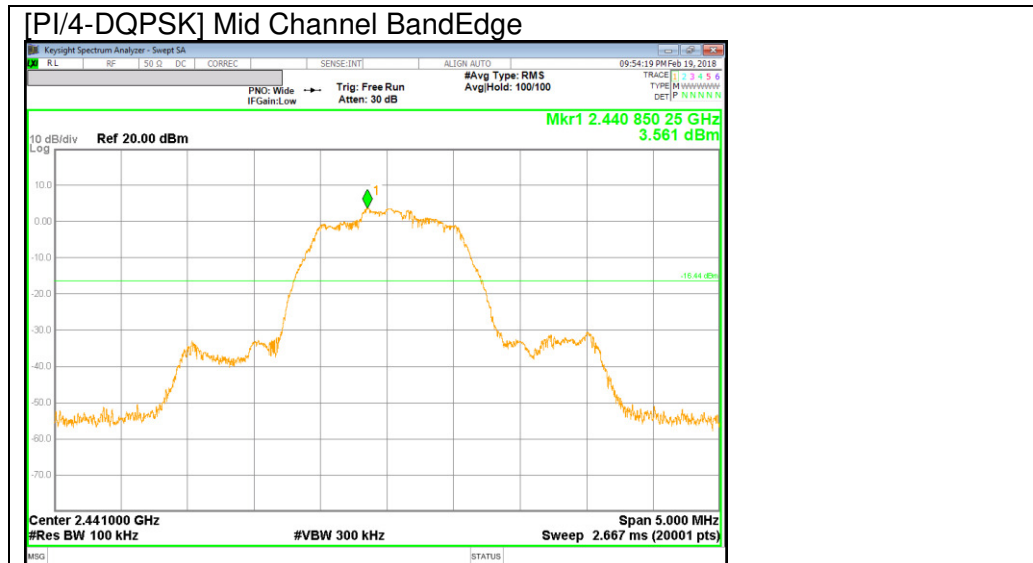

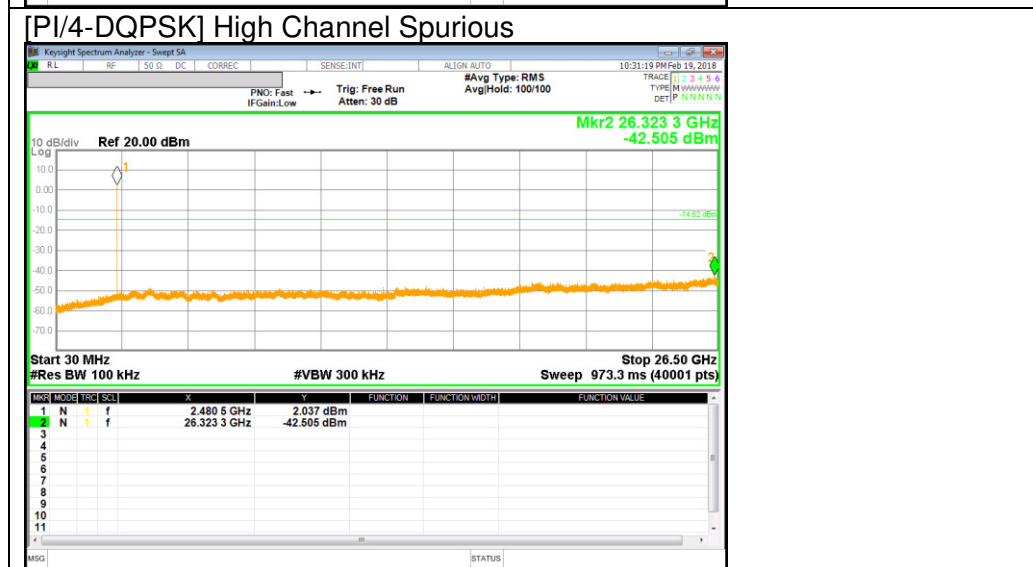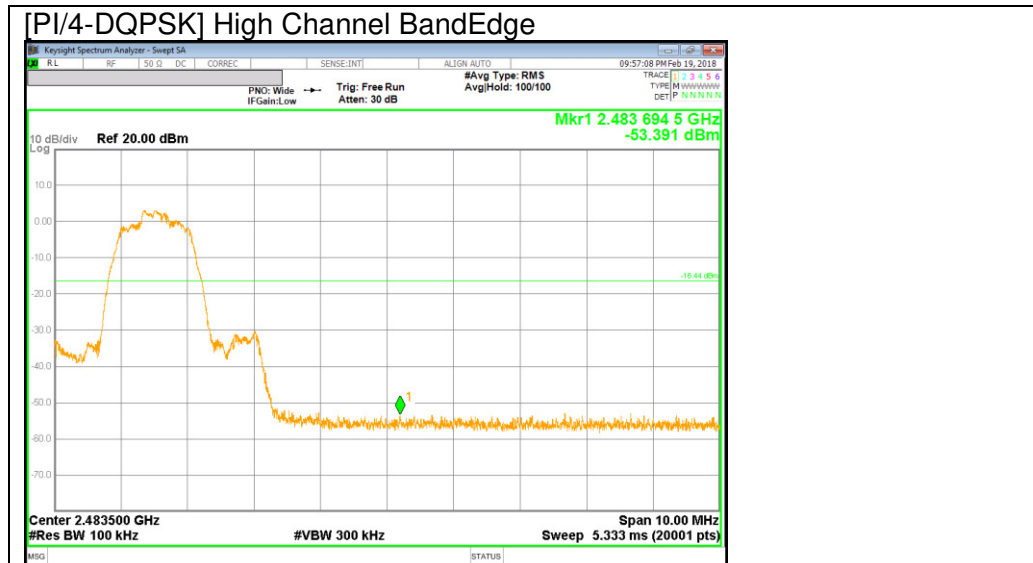


**BandEdge Emission at PI/4-DQPSK Hopping Mode**


[PI/4-DQPSK Hopping Mode] Low Channel BandEdge


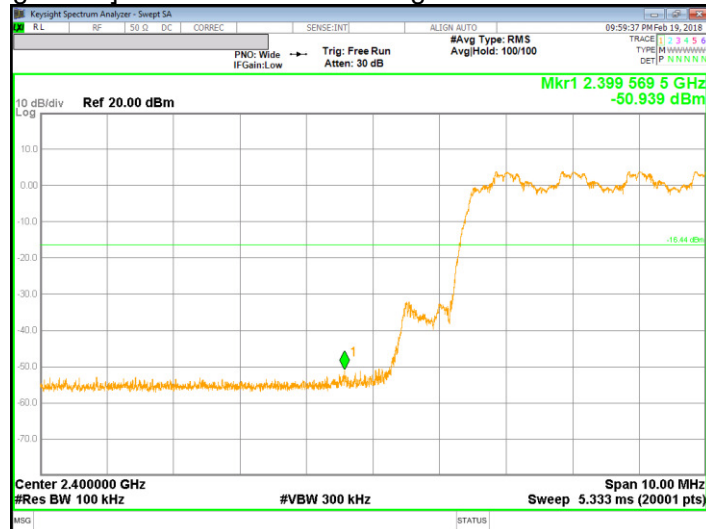




[PI/4-DQPSK Hopping Mode] High Channel BandEdge

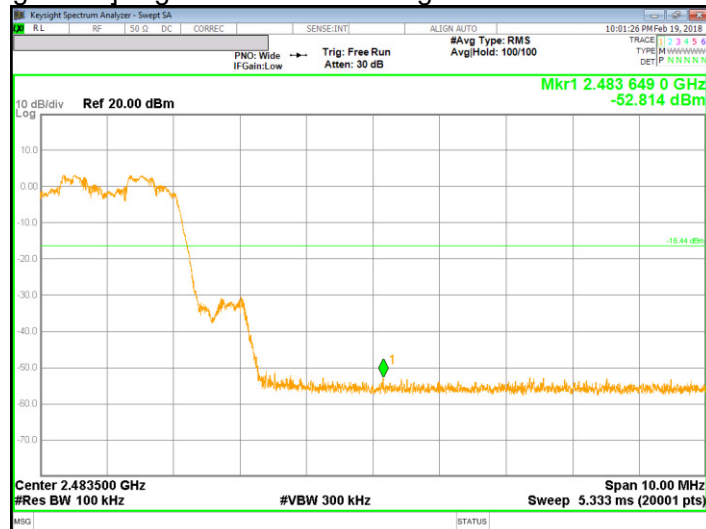

**8PSK Mode**

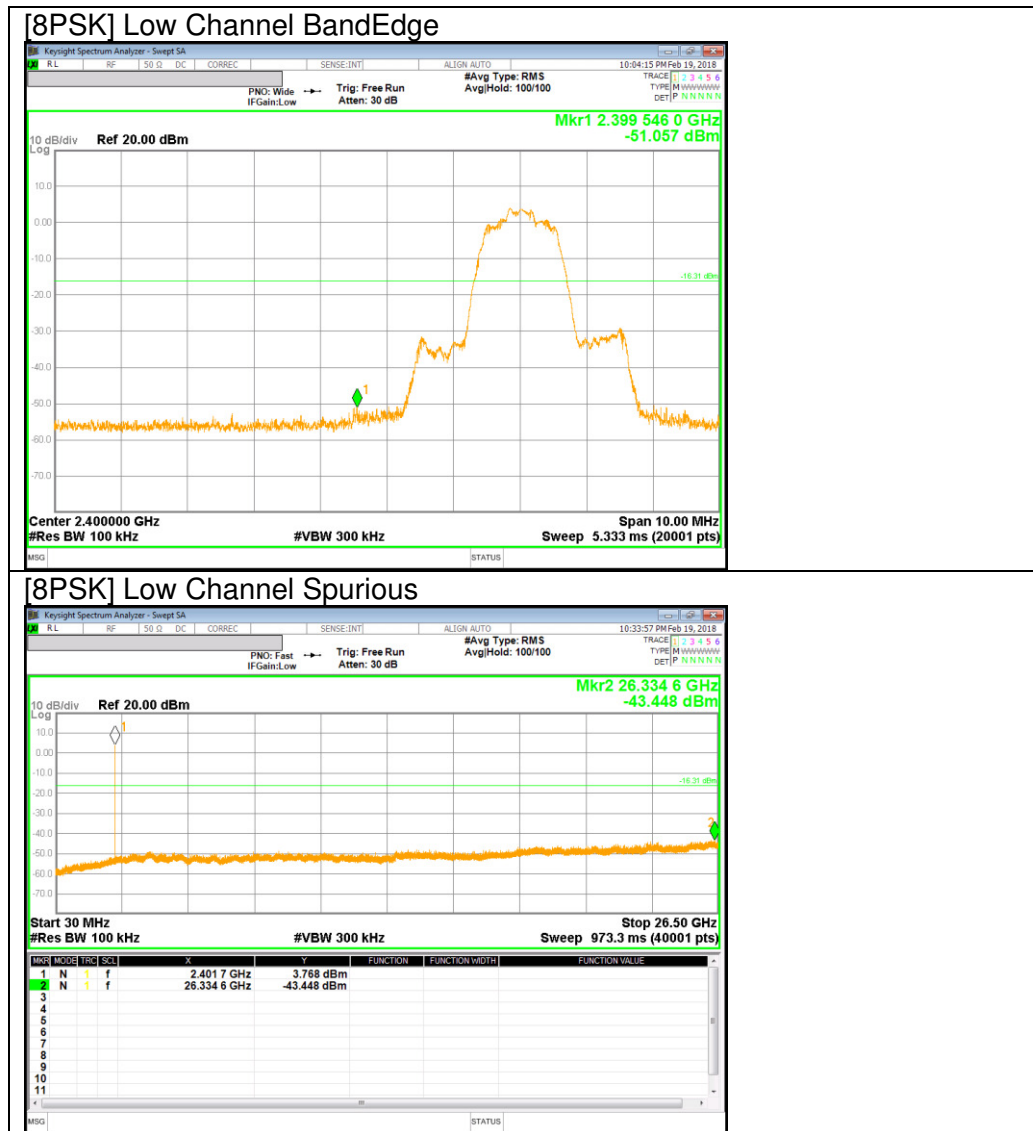


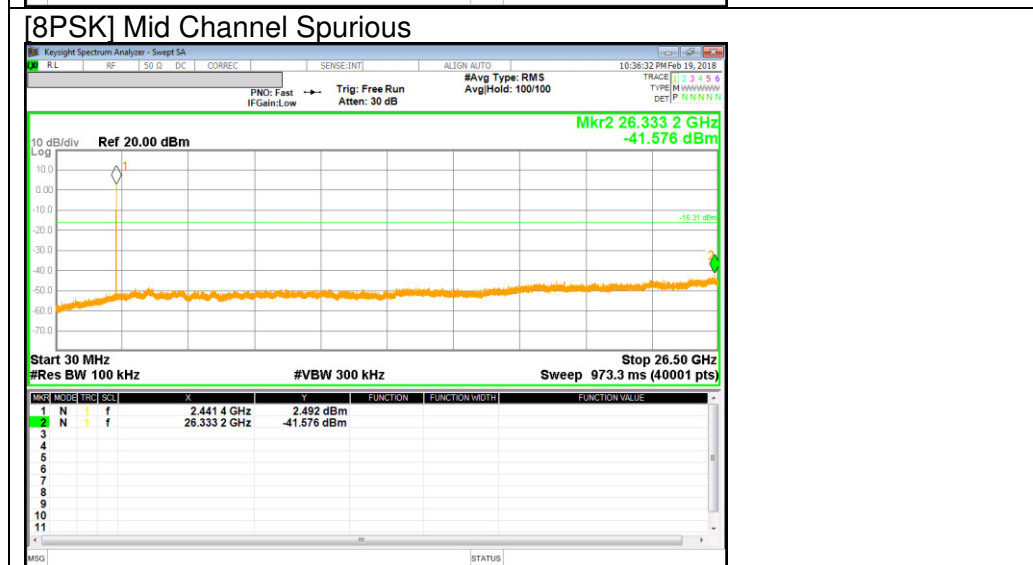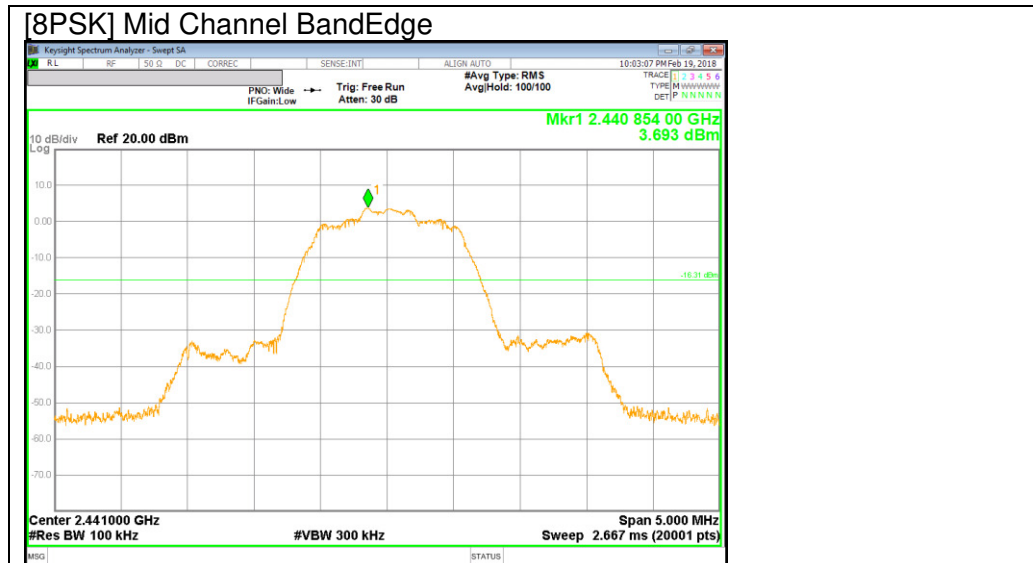

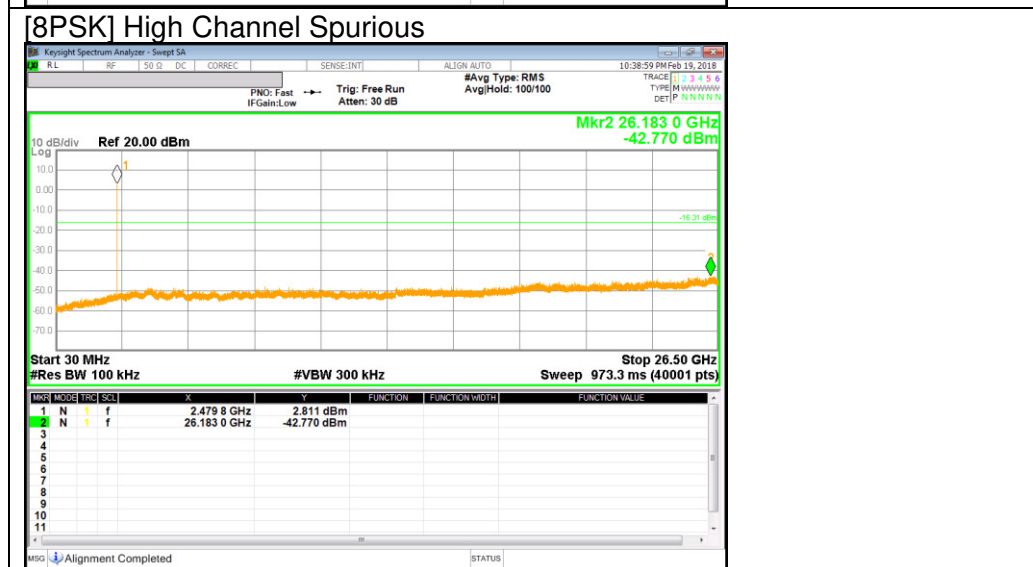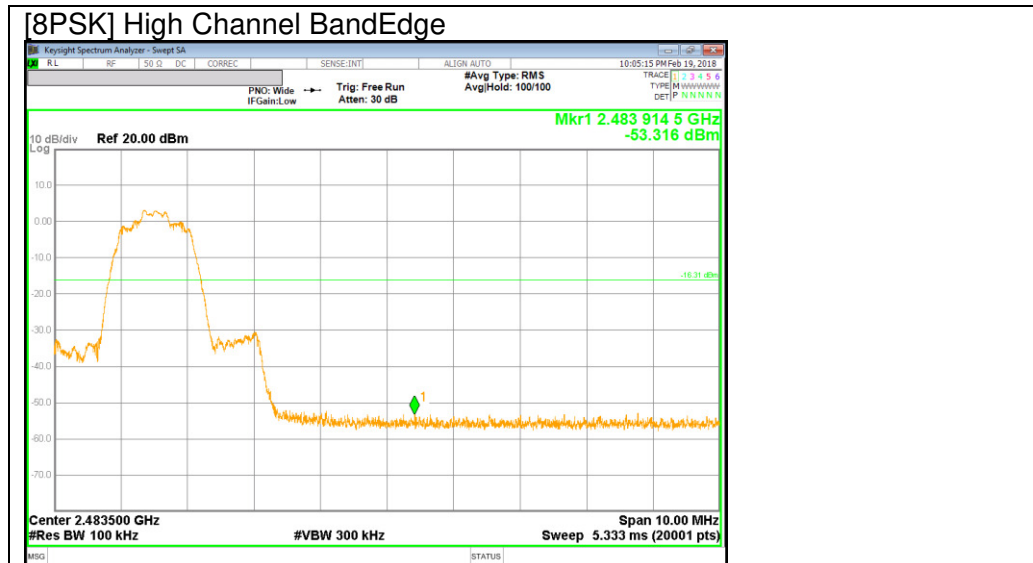

### BandEdge Emission at 8PSK Hopping Mode

[8PSK Hopping Mode] Low Channel BandEdge

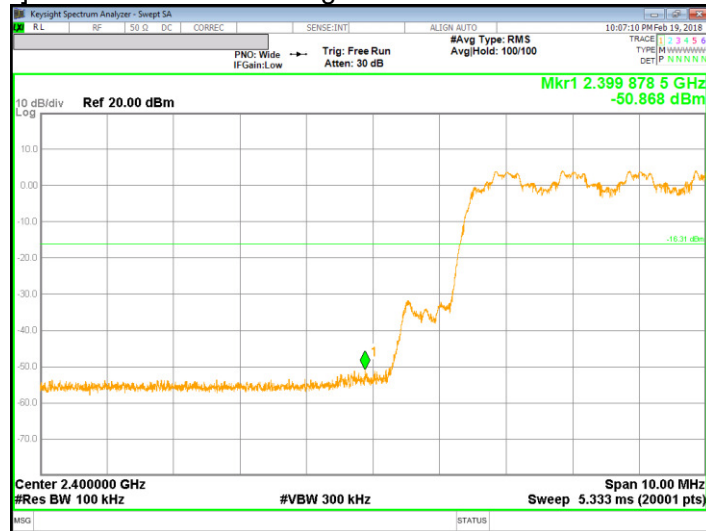

[8PSK Hopping Mode] High Channel BandEdge



## 10. RADIATED TEST RESULTS

### 10.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209  
 IC RSS-GEN Clause 8.9 (Transmitter)  
 IC RSS-GEN Clause 7 (Receiver)

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements.(Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.)

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement.

$$\text{GFSK} = 1/T = 1 / 0.0029\text{S} = 350\text{Hz}.$$

The minimum VBW was 350Hz, but test receiver(ESU40) couldn't set value 350Hz. Due to this reason, testing VBW was set to 500Hz(Worst cases).

The spectrum from 1GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.  
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 10.2. TRANSMITTER ABOVE 1 GHz

### 10.2.1. BASIC DATA RATE GFSK MODULATION

#### RESTRICTED BANDEDGE (LOW CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

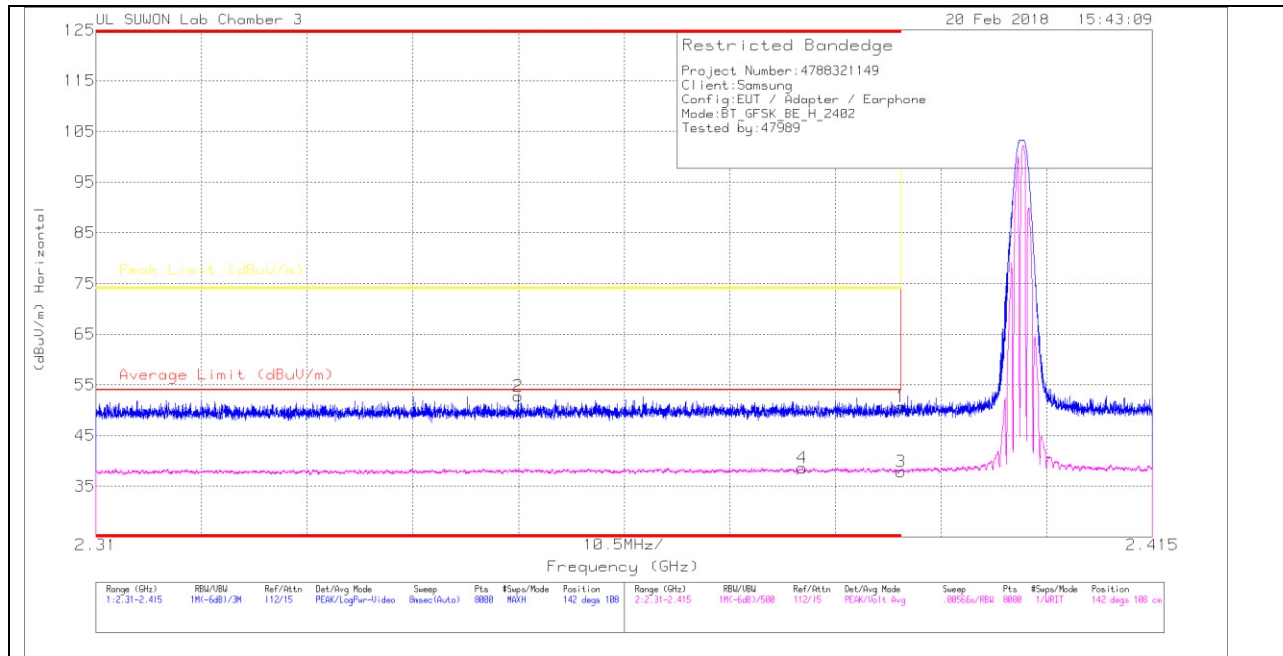

#### HORIZONTAL DATA

#### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00205959)	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.12	Pk	31.8	-23.3	50.62	-	-	74	-23.38	142	108	H
2	* 2.352	44.35	Pk	31.7	-23.3	52.75	-	-	74	-21.25	142	108	H
3	* 2.39	29.36	VA1T	31.8	-23.3	37.86	54	-16.14	-	-	142	108	H
4	* 2.38	30.05	VA1T	31.8	-23.2	38.65	54	-15.35	-	-	142	108	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

**VERTICAL PEAK AND AVERAGE PLOT**

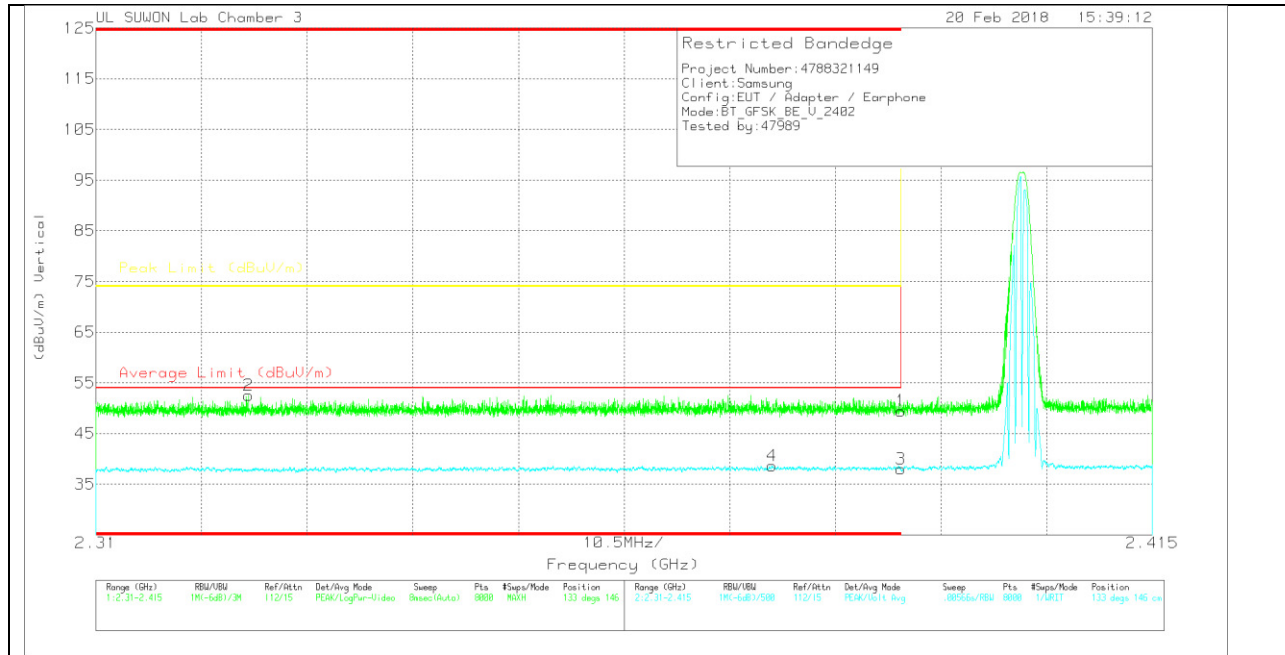

**VERTICAL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00205959)	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.98	Pk	31.8	-23.3	49.48	-	-	74	-24.52	133	146	V
2	* 2.325	44.28	Pk	31.6	-23.3	52.58	-	-	74	-21.42	133	146	V
3	* 2.39	29.54	VA1T	31.8	-23.3	38.04	54	-15.96	-	-	133	146	V
4	* 2.377	30.03	VA1T	31.8	-23.2	38.63	54	-15.37	-	-	133	146	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

### AUTHORIZED BANDEDGE (HIGH CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

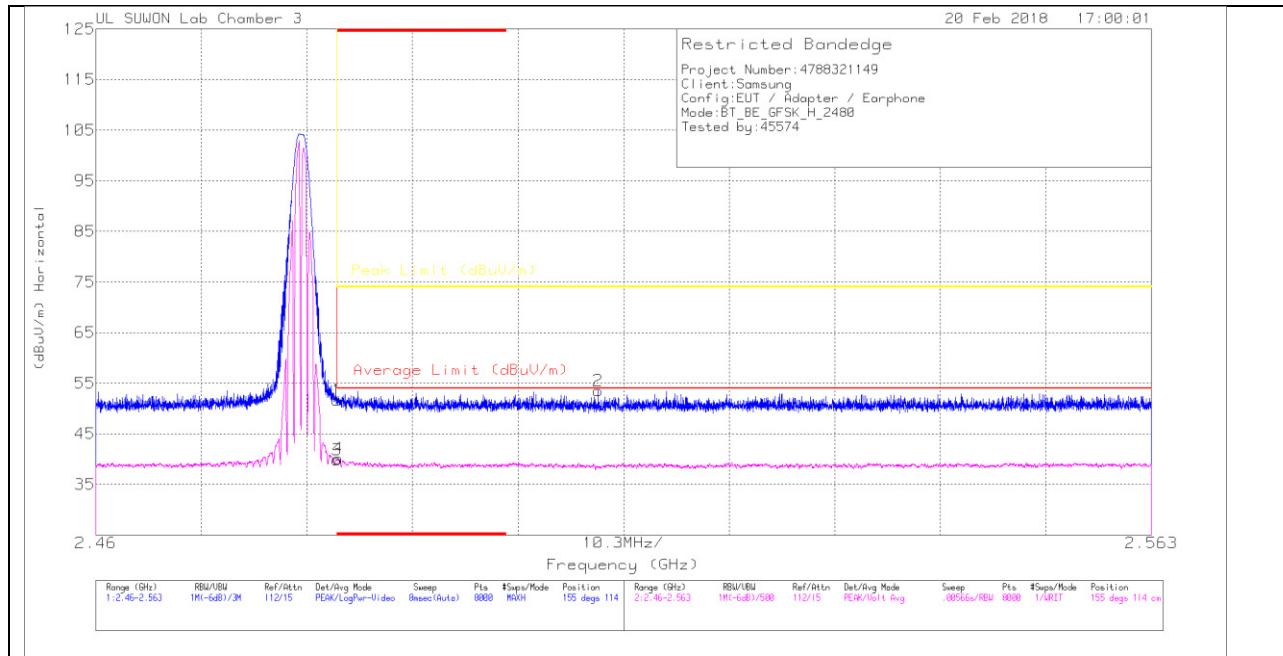

#### HORIZONTAL DATA

##### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	42.59	Pk	32.1	-23	51.69	-	-	74	-22.31	155	114	H
2	2.509	44.62	Pk	32.1	-23.2	53.52	-	-	74	-20.48	155	114	H
3	* 2.484	30.81	VA1T	32.1	-23	39.91	54	-14.09	-	-	155	114	H
4	* 2.484	30.97	VA1T	32.1	-23	40.07	54	-13.93	-	-	155	114	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

**VERTICAL PEAK AND AVERAGE PLOT**

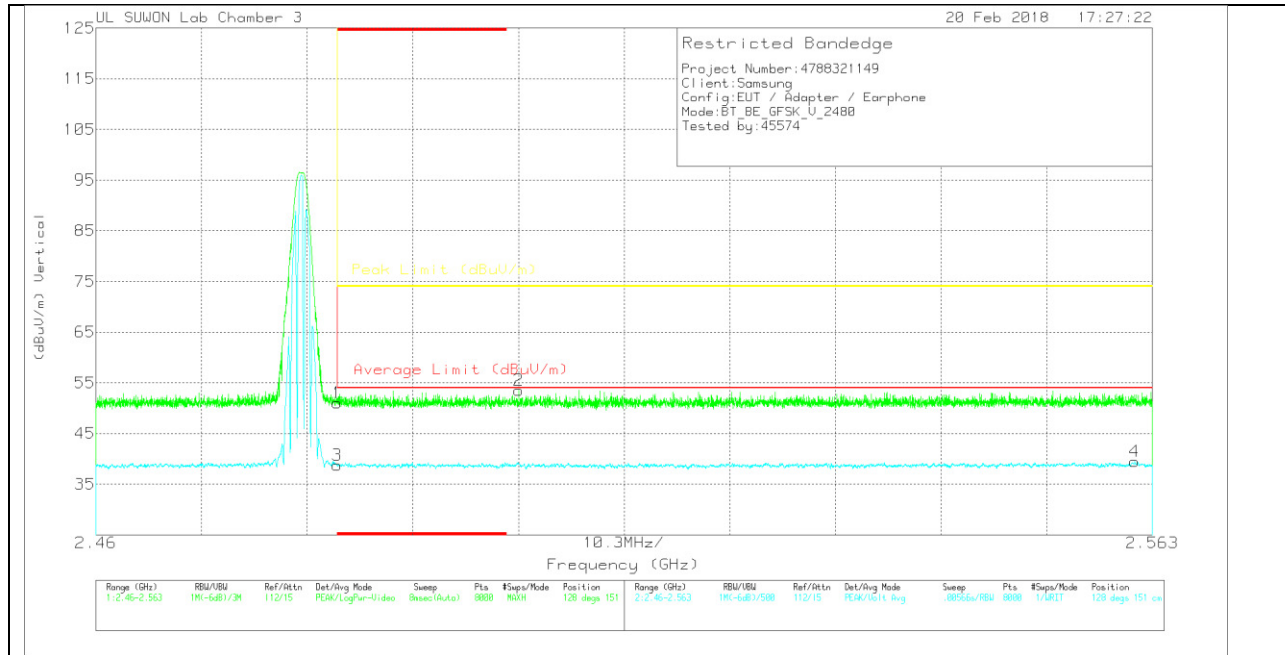

**VERTICAL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	3117(00205959)	10dB_ATT[dB]	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.89	Pk	32.1	-23	50.99	-	-	74	-23.01	128	151	V
2	2.501	44.47	Pk	32.1	-23	53.57	-	-	74	-20.43	128	151	V
3	* 2.484	29.67	VA1T	32.1	-23	38.77	54	-15.23	-	-	128	151	V
4	2.561	30.26	VA1T	32.1	-22.9	39.46	54	-14.54	-	-	128	151	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

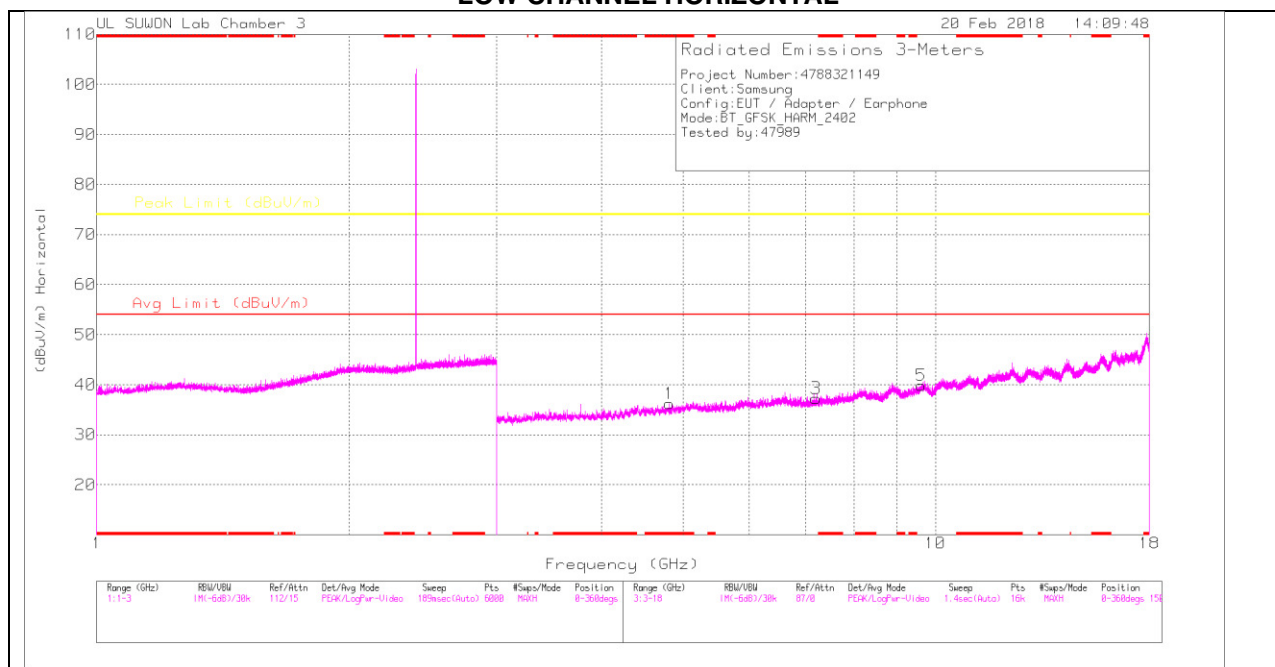

### LOW CHANNEL VERTICAL

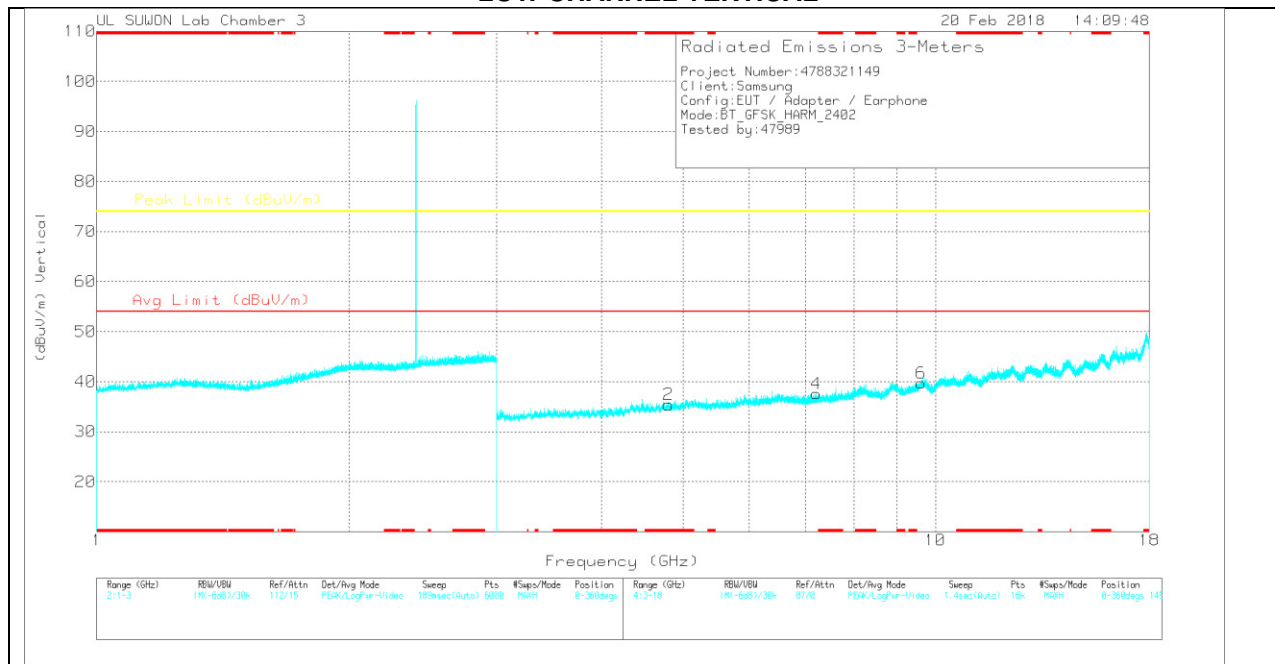

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.814	30.54	PK	34	-28.3	36.24	-	-	74	-37.76	0-360	250	H
3	7.205	25.55	PK	35.6	-23.9	37.25	-	-	74	-36.75	0-360	150	H
5	9.617	23.07	PK	36.7	-19.9	39.87	-	-	74	-34.13	0-360	250	H
2	* 4.805	29.71	PK	33.9	-28.2	35.41	-	-	74	-38.59	0-360	250	V
4	7.212	25.9	PK	35.6	-23.9	37.6	-	-	74	-36.4	0-360	250	V
6	9.616	22.94	PK	36.7	-19.9	39.74	-	-	74	-34.26	0-360	250	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

**MID CHANNEL HORIZONTAL**

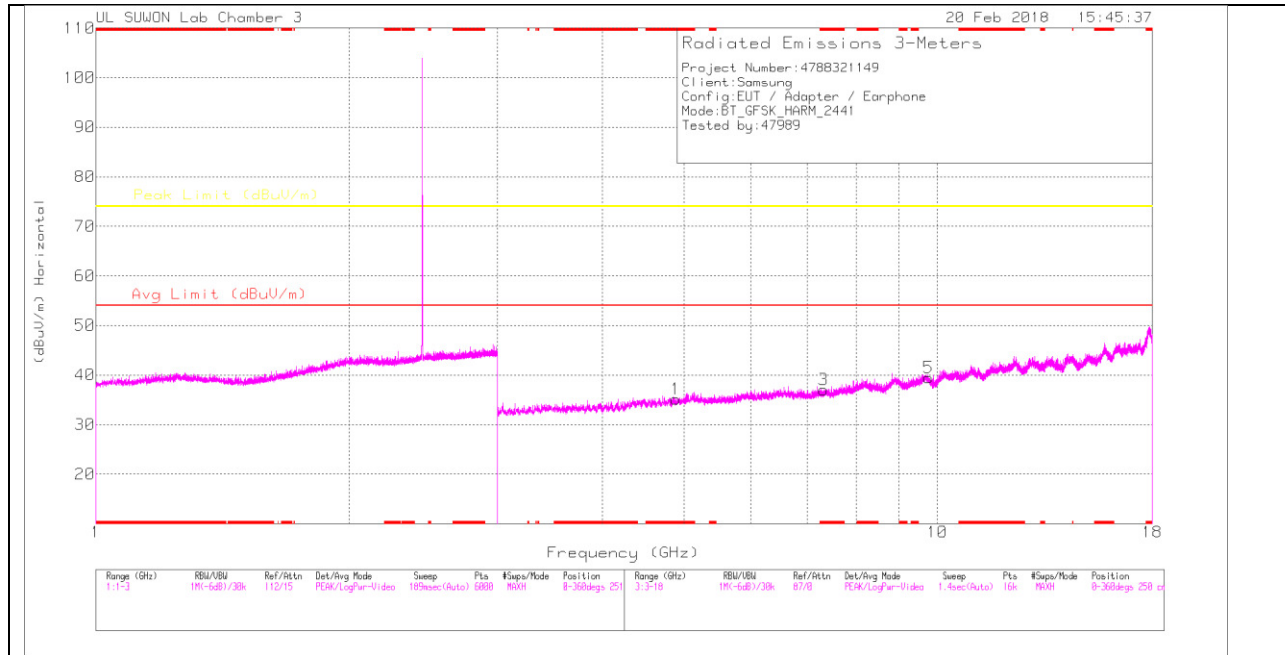

**MID CHANNEL VERTICAL**

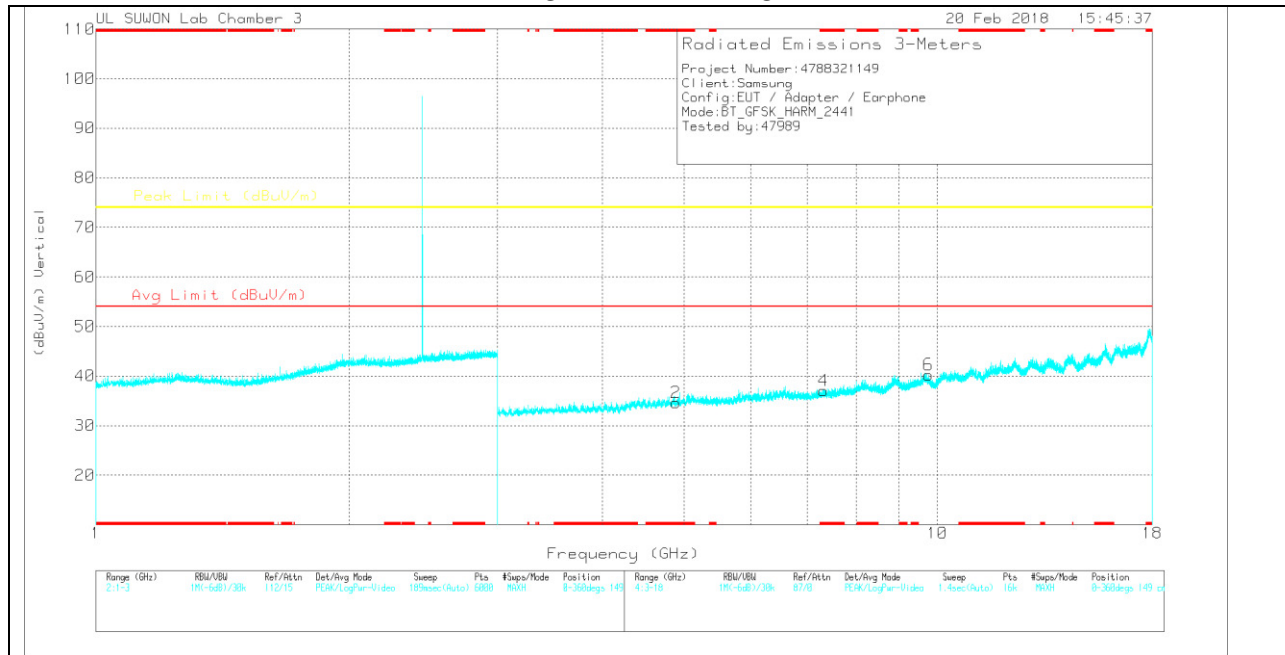

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.892	30.18	PK	34	-29	35.18	-	-	74	-38.82	0-360	250	H
3	* 7.326	24.75	PK	35.6	-23.3	37.05	-	-	74	-36.95	0-360	150	H
5	9.758	22.01	PK	36.9	-19.5	39.41	-	-	74	-34.59	0-360	150	H
2	* 4.89	29.58	PK	34	-28.9	34.68	-	-	74	-39.32	0-360	149	V
4	* 7.324	24.81	PK	35.6	-23.4	37.01	-	-	74	-36.99	0-360	250	V
6	9.763	22.88	PK	36.9	-19.5	40.28	-	-	74	-33.72	0-360	149	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

### HIGH CHANNEL HORIZONTAL

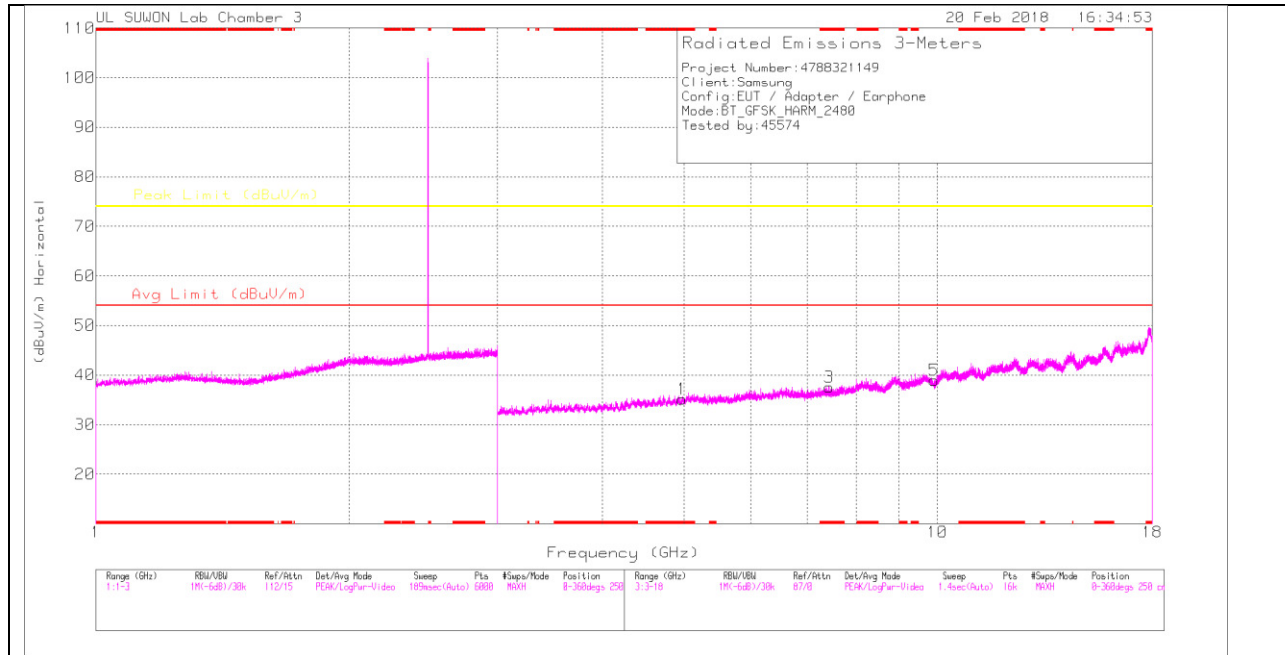

### HIGH CHANNEL VERTICAL

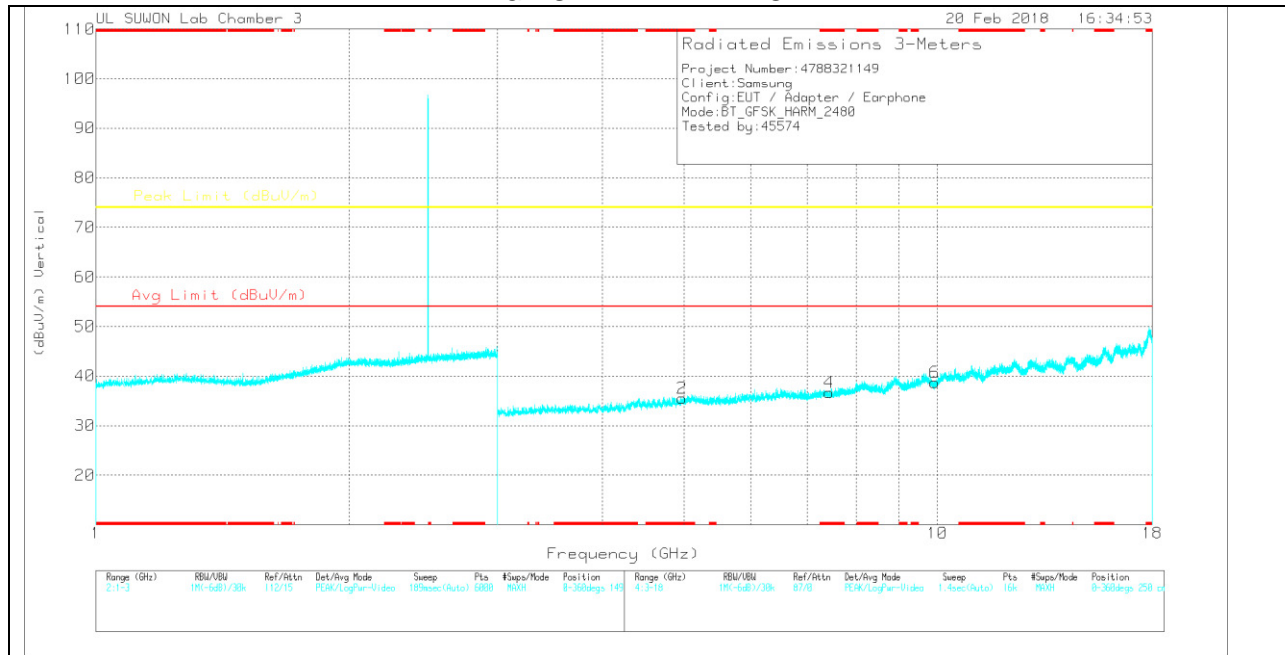

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL DATA**

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.97	29.49	PK	34.1	-28.4	35.19	-	-	74	-38.81	0-360	250	H
3	* 7.432	25.16	PK	35.6	-23.2	37.56	-	-	74	-36.44	0-360	149	H
5	9.917	21.63	PK	37	-19.7	38.93	-	-	74	-35.07	0-360	250	H
2	* 4.971	29.81	PK	34.1	-28.4	35.51	-	-	74	-38.49	0-360	149	V
4	* 7.437	24.24	PK	35.6	-23.2	36.64	-	-	74	-37.36	0-360	250	V
6	9.919	21.35	PK	37	-19.7	38.65	-	-	74	-35.35	0-360	250	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

## 10.2.2. ENHANCED DATA RATE 8PSK MODULATION RESTRICTED BANDEDGE (LOW CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

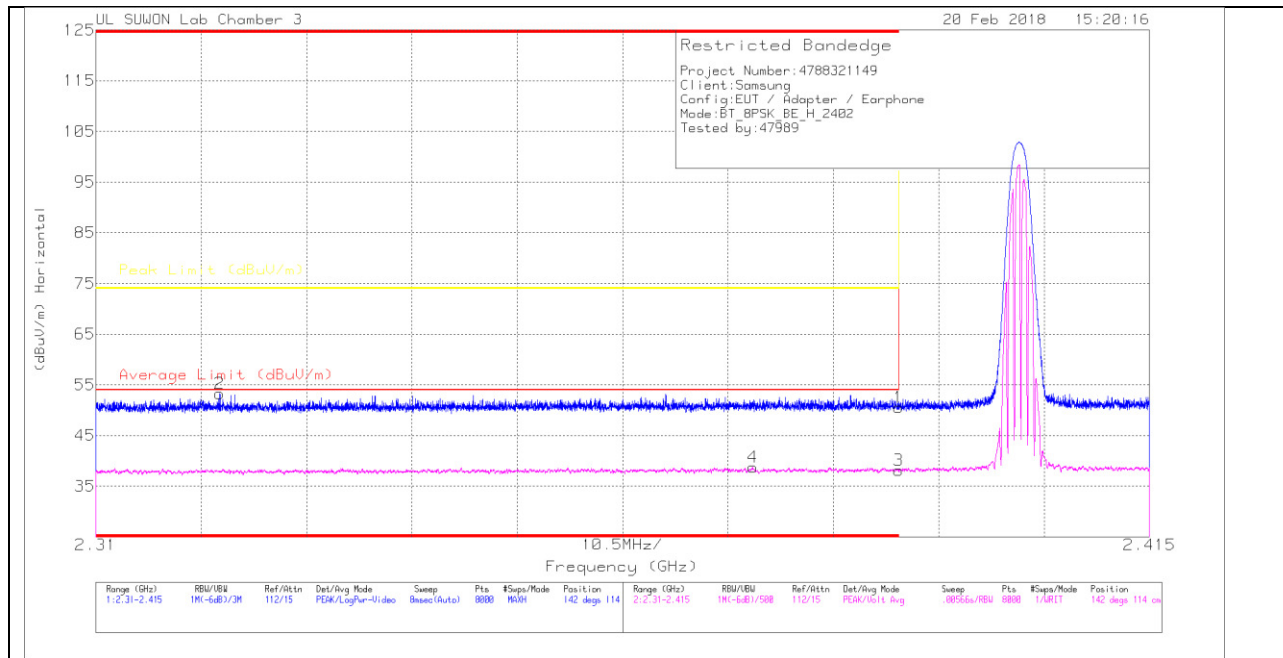

### HORIZONTAL DATA

#### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00205959)	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.08	Pk	31.8	-23.3	50.58	-	-	74	-23.42	142	114	H
2	* 2.322	44.95	PK	31.6	-23.3	53.25	-	-	74	-20.75	142	114	H
3	* 2.39	29.59	VA1T	31.8	-23.3	38.09	54	-15.91	-	-	142	114	H
4	* 2.375	30.2	VA1T	31.8	-23.3	38.7	54	-15.3	-	-	142	114	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average  $V_B=1/T_{on}$  where:  $T_{on}$  is transmit duration

**VERTICAL PEAK AND AVERAGE PLOT**

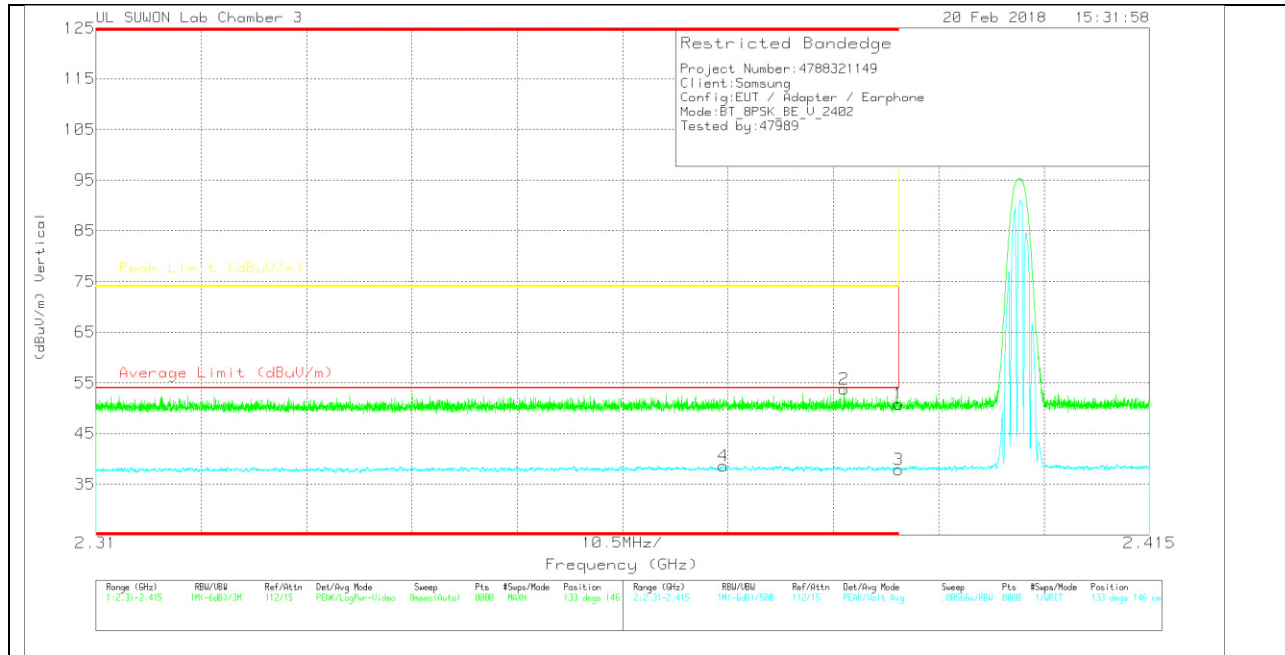

**VERTICAL DATA**

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00205959)	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.26	Pk	31.8	-23.3	50.76	-	-	74	-23.24	133	146	V
2	* 2.385	45.29	Pk	31.8	-23.3	53.79	-	-	74	-20.21	133	146	V
3	* 2.39	29.32	VA1T	31.8	-23.3	37.82	54	-16.18	-	-	133	146	V
4	* 2.373	30.17	VA1T	31.7	-23.2	38.67	54	-15.33	-	-	133	146	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration