

# FCC/IC ANT+ REPORT

## Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Date of Issue:**  
23 December 2019

**Address:**  
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do,  
16677, Rep. of Korea

**Test Site/Location:**  
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si,  
Gyeonggi-do, 17383 KOREA

**Report No.:** HCT-RF-1911-FI024-R1

<b>FCC ID:</b>	<b>A3LSMT307U</b>
<b>IC:</b>	<b>649E-SMT307U</b>
<b>APPLICANT:</b>	<b>SAMSUNG Electronics Co., Ltd.</b>

**Model:** SM-T307U

**EUT Type:** Tablet

**Max. RF Output Power:** 93.34 dBuV/m @3 m

**Frequency Range:** 2402 MHz -2480 MHz

**Modulation type** GFSK

**FCC Classification:** Low Power communication Device Transmitter(DXX)

**FCC Rule Part(s):** Part 15 subpart C 15.249

**IC Rule Part(s):** RSS-210 Issue 9 (August 2016)  
RSS-Gen Issue 5\_Amendment 1 (March 2019)

**Engineering Statement:**

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC/IC Rules under normal use and maintenance.



**Report prepared by : Jeong Ho Kim**  
**Engineer of Telecommunication testing center**



**Approved by : Jong Seok Lee**  
**Manager of Telecommunication testing center**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1911-FI024	11 December 2019	- First Approval Report
HCT-RF-1911-FI024-R1	23 December 2019	- RSS-GEN issue Date updated. - Section 7.7(Page 23) : test procedure revised.

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

# Table of Contents

1. EUT DESCRIPTION .....	4
2. TEST METHODOLOGY .....	5
EUT CONFIGURATION.....	5
EUT EXERCISE .....	5
GENERAL TEST PROCEDURES .....	5
DESCRIPTION OF TEST MODES .....	6
3. INSTRUMENT CALIBRATION.....	6
4. FACILITIES AND ACCREDITATIONS .....	6
FACILITIES .....	6
EQUIPMENT .....	6
5. ANTENNA REQUIREMENTS.....	6
6. MEASUREMENT UNCERTAINTY .....	7
7. DESCRIPTION OF TESTS.....	8
8. SUMMARY TEST OF RESULTS .....	25
9. TEST RESULT .....	26
9.1 DUTY CYCLE.....	26
9.2 OCCUPIED BANDWIDTH .....	27
9.3 RADIATED MEASUREMENT.....	29
9.3.1 FUNDAMENTAL FIELD STRENGTH LEVEL MEASUREMENT .....	29
9.3.2 RADIATED SPURIOUS EMISSIONS.....	31
9.3.3 RADIATED BAND EDGES MEASUREMENTS.....	34
9.4 RECEIVER SPURIOUS EMISSIONS .....	36
9.5 POWERLINE CONDUCTED EMISSIONS .....	37
10. LIST OF TEST EQUIPMENT .....	45
11. ANNEX A_ TEST SETUP PHOTO .....	47

## 1. EUT DESCRIPTION

<b>Model</b>	SM-T307U
<b>EUT Type</b>	Tablet
<b>Power Supply</b>	DC 3.85 V
<b>Battery Information</b>	Model: EB-BT307ABY Type: Li-ion Battery
<b>Travel Adapter Information</b>	Model : EP-TA50JWE Manufacture: DONGYANG E&P
<b>Data Cable Information</b>	Model : EP-DR140AWZ Manufacture: KSD
<b>Ear-jack Information</b>	Model : EHS64AVFWE Manufacture: ALMUS
<b>Frequency Range</b>	2402 MHz - 2480 MHz
<b>Max. RF Output Power</b>	Peak : 93.34 dBuV/m @3 m Average : 61.46 dBuV/m @3 m
<b>Modulation Type</b>	GFSK
<b>Number of Channels</b>	79 Channels
<b>Antenna Specification</b>	Antenna type: LDS Peak Gain : -0.1 dBi
<b>Date(s) of Tests</b>	October 22, 2019 ~ November 29, 2019
<b>PMN (Product Marketing Number)</b>	Galaxy Tab A4S
<b>HVIN (Hardware Version Identification Number)</b>	SM-T307U
<b>FVIN (Firmware Version Identification Number)</b>	N/A
<b>HMN (Host Marketing Name)</b>	N/A

## **2. TEST METHODOLOGY**

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) Operating Under §15.249” were used in the measurement.

### **EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### **EUT EXERCISE**

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.249 under the FCC Rules Part 15 Subpart C. / RSS-210 issue 9.

## **GENERAL TEST PROCEDURES**

### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013). To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120 kHz for frequencies below 1 GHz or 1 MHz for frequencies above 1 GHz. For average measurements above 1 GHz, the average measurement shall determined from the peak field strength after correcting for the worst-case duty cycle as described in section 9.1

-  $DCCF = 20\log_{10}(\text{Pulse width} / \text{Period of the pulse train})$  , (RBW = 1 MHz, VBW = 3 MHz)

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 4. FACILITIES AND ACCREDITATIONS

### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 5. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- (1) The antennas of this E.U.T are permanently attached.

(2) The E.U.T Complies with the requirement of §15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test overview


§15.35(c)

: Unless otherwise specified, e.g. § 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification

#### Test Configuration

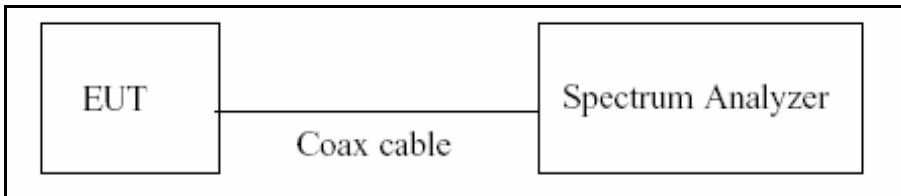


## 7.2. Occupied Bandwidth

### Test overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

### Test Configuration

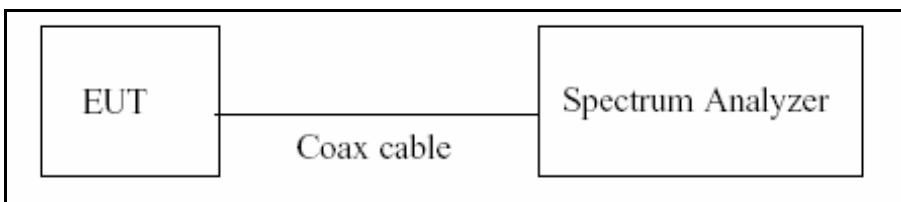

### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.


- 1) RBW = 1% to 3% of the 99% bandwidth.
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize

Note :

We tested Occupied Bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. 20dB Bandwidth

#### Test Configuration

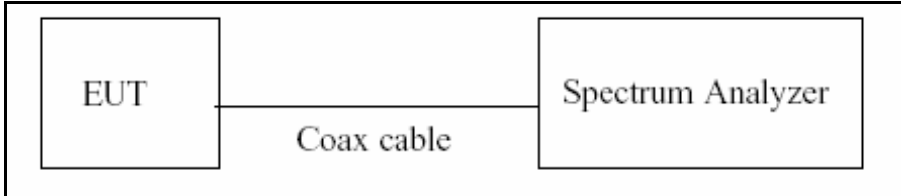

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

- 1) RBW = 1% to 5% of the 20dB bandwidth.
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize

Note :

We tested 20dB Bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.

**7.4. Fundamental Field Strength Level**

**Limit**

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
2400-2483.5 MHz	50	500


§15.249(e):

The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

The maximum permissible average field strength level is 50 mV/m (93.98 dBuV/m).

The maximum permissible peak field strength level is 500 mV/m (113.98 dBuV/m).

**Test Configuration**

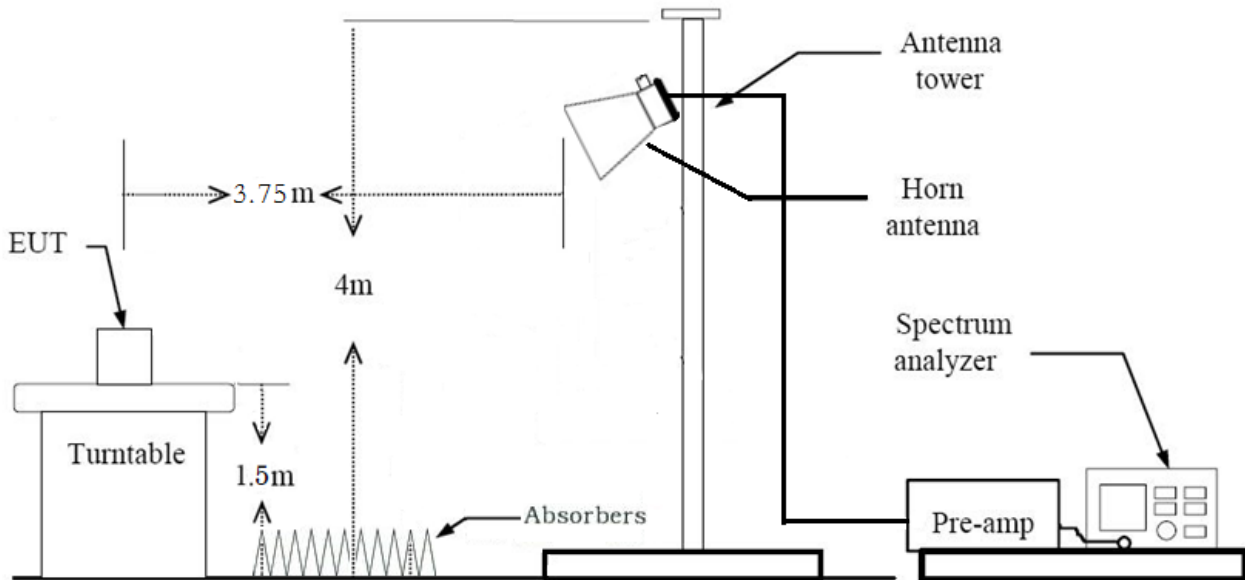

## Test Procedure

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).
  - Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency : 2402MHz, 2441MHz, 2480MHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq 3 \times$  RBW
  - (2) Measurement Type(Average):
    - Average value of pulsed emissions
    - Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall determined from the peak field strength after correcting for the worst-case duty cycle as described in section 9.1.
    - DCCF =  $20\log_{10}(\text{Pulse width} / \text{Period of the pulse train})$
9. Total(Peak) = Peak Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)  
Total(Average) = Peak Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)  
+ Duty Cycle Correction Factor

**7.5. Radiated Test**

**Limit**


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

§15.249(d):  
Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.


§15.249(e):  
The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

**Test Configuration**


Below 30 MHz

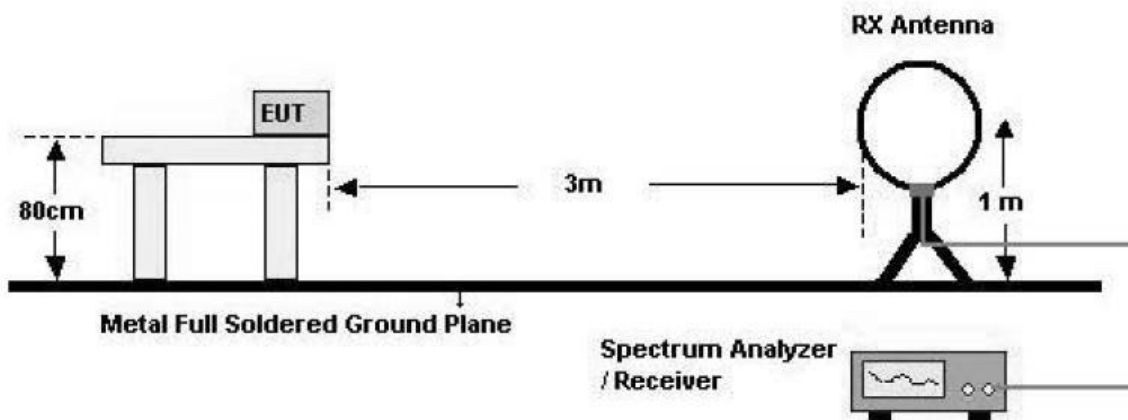

30 MHz - 1 GHz

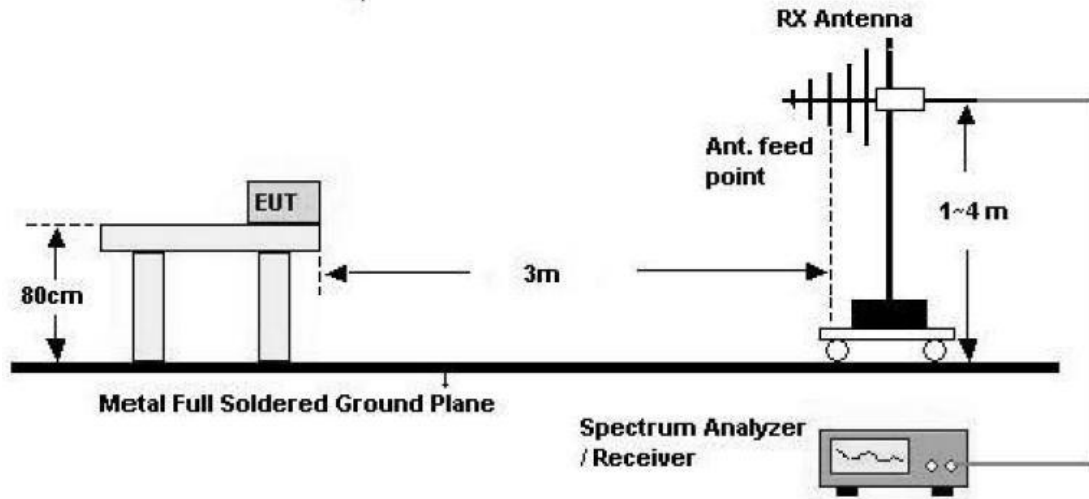

Above 1 GHz

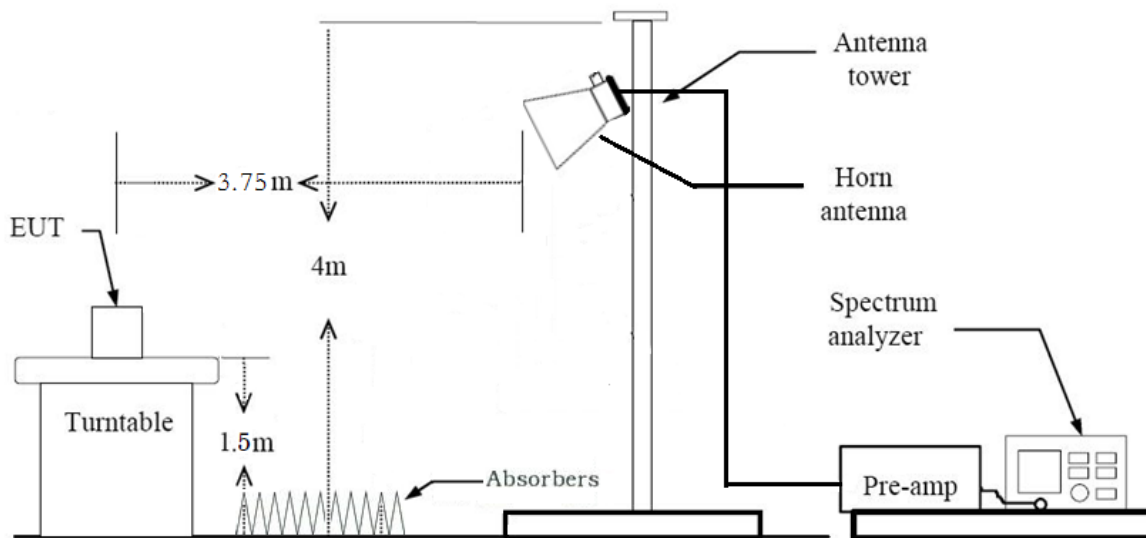

**Test Procedure of Radiated spurious emissions(Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq$  3RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions(Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq$  3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※ In general, (1) is used mainly

6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
7. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).
  - Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz

- VBW  $\geq$  3x RBW

(2) Measurement Type(Average):

- Average value of pulsed emissions

- Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall determined from the peak field strength after correcting for the worst-case duty cycle as described in section 9.1.

- DCCF =  $20\log_{10}(\text{Pulse width} / \text{Period of the pulse train})$

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Peak) = Peak Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) –Amp Gain  
+ Distance Factor(D.F)

Total(Average) = Peak Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) –Amp Gain  
+ Distance Factor(D.F) + Duty Cycle Correction Factor

### **Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).
  - Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range = 2310 MHz ~ 2400 MHz/ 2483.5 MHz ~ 2500 MHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq 3 \times$  RBW
  - (2) Measurement Type(Average):
    - Measured Frequency Range = 2310 MHz ~ 2400 MHz/ 2483.5 MHz ~ 2500 MHz
    - Average value of pulsed emissions
    - Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall determined from the peak field strength after correcting for the worst-case duty cycle as described in section 9.1.
    - DCCF =  $20\log_{10}(\text{Pulse width} / \text{Period of the pulse train})$
9. Total(Peak) = Peak Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)  
Total(Average) = Peak Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)  
+ Duty Cycle Correction Factor

**7.6. AC Power line Conducted Emissions**

**Limit**

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

**Test Configuration**

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

**Test Procedure**

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

**Sample Calculation**

Quasi-peak(Final Result) = Reading Value + Correction Factor

**7.7. Receiver Spurious Emissions**

**Limit**


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

**Test Configuration**

30 MHz - 1 GHz

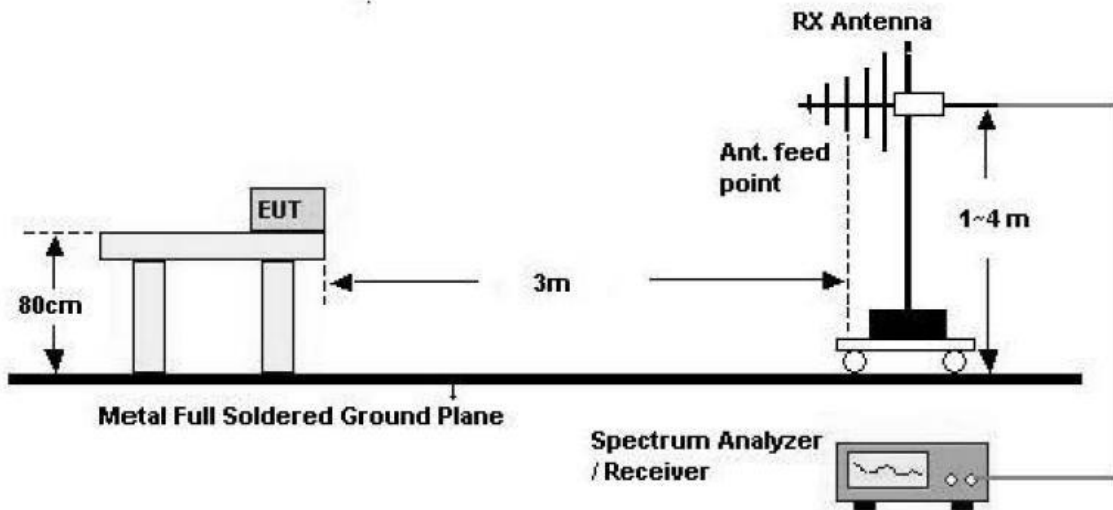

**Test Procedure of Receiver Spurious Emissions (Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

5. Spectrum Setting

(1) Measurement Type(Peak):


- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq$  3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

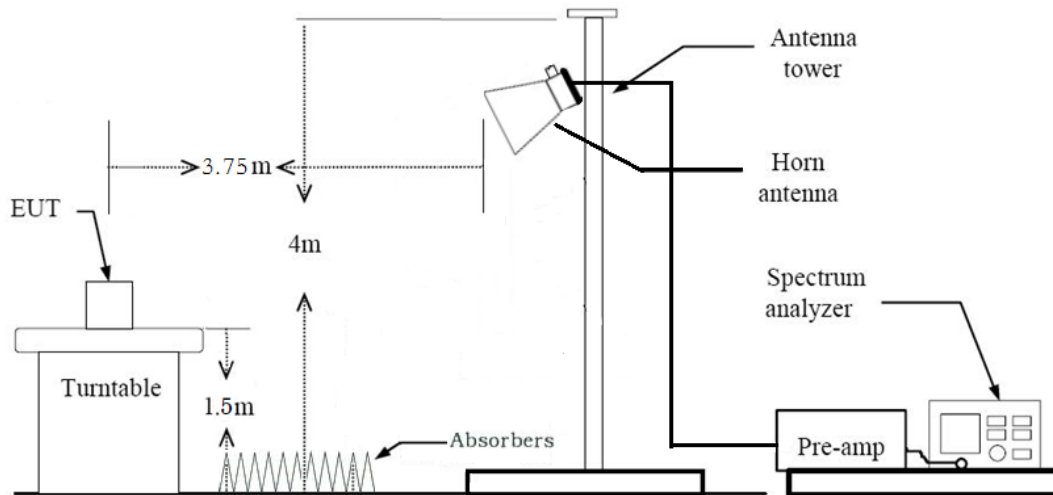**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).

◆ Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)

6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz

- VBW  $\geq$  3 x RBW

(2) Measurement Type(Average):

- We performed using a reduced video BW method was done with the analyzer in linear mode

- Measured Frequency Range : 1 GHz – 25 GHz

- Detector = Peak

- Trace = Maxhold

- RBW = 1 MHz

- VBW  $\geq$   $1/\tau$  Hz, where  $\tau$  = pulse width in seconds

The actual setting value of VBW = 10 kHz

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

## **7.8. Worst case configuration and mode**

### **Fundamental Field Strength Level & Radiated test**

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
  - Worstcase : Stand alone
2. EUT Axis
  - Fundamental Field Strength Level : X
  - Radiated test : X
3. All period were investigated and the worst case period results are reported.
  - All period : Period 256, Period 128, Period 64, Period 32, Period 16, Period 8, Period 4, Period 1
  - Worstcase : Period 128
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane

### **AC Power line Conducted Emissions**

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter(Normal),  
Stand alone + Travel Adapter(Normal),  
Stand alone + External accessories(Earphone, etc)+Travel Adapter(Fast charging),  
Stand alone + Travel Adapter(Fast charging)
  - Worstcase : Stand alone + Travel Adapter(Normal and FastCharging)

### **Duty Cycle & Occupied Bandwidth**

1. All period were investigated and the worst case period results are reported.
  - All period : Period 256, Period 128, Period 64, Period 32, Period 16, Period 8, Period 4, Period 1
  - Worstcase : Period 128

### 8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	IC Part Section(s)	Test Limit	Test Condition	Test Result
Occupied Bandwidth	§2.1049	RSS-Gen 6.7	N/A	Conducted	PASS
20dB Bandwidth	§15.215	N/A	N/A		PASS
Duty Cycle	§15.35(c)	N/A	N/A		PASS
AC Power line Conducted Emissions	§15.207	RSS-Gen 8.8	cf. Section 7.5		PASS
Fundamental Field Strength Level	§15.249(a)(e)	RSS-210 B.10	< 50 mV/m	Radiated	PASS
Harmonic Field Strength Level	§15.249(a)(e)	RSS-210 B.10	< 500 uV/m		PASS
General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	§15.205, §15.209, §15.249(d)(e)	RSS-Gen 8.9	< 15.209 limits or 50dB below the level of the fundamental		PASS
Receiver Spurious Emissions	N/A	RSS-GEN, 8.10	cf. Section 7.7		PASS


## 9. TEST RESULT

### 9.1 DUTY CYCLE


$$\begin{aligned} \text{DCCF} &= 20\log_{10}(\text{Pulse width} / \text{Period of the pulse train}) \\ &= 20\log_{10}(13 \times 0.1959 \text{ ms} / 100 \text{ ms}) = -31.88 \text{ dB} \end{aligned}$$

■ Test Plots

Pulse Width Plot

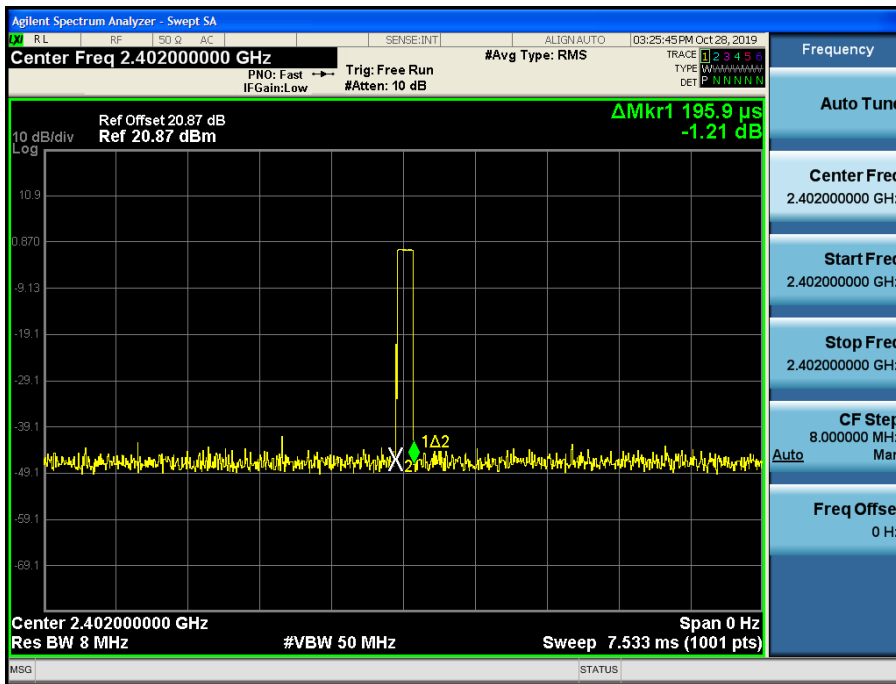

Period of the Pulse Train

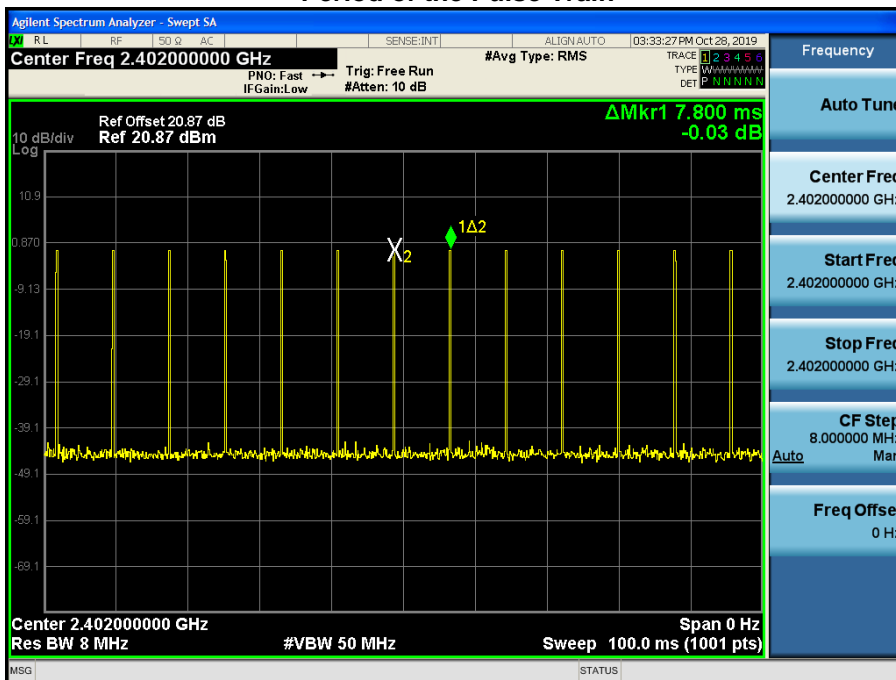


**9.2 OCCUPIED BANDWIDTH**


Frequency[MHz]	99% Bandwidth[kHz]	20dB Bandwidth (kHz)
2402	841.90	766.1
2441	861.18	746.1
2480	853.98	762.5

■ **Test Plots**


**Occupied Bandwidth plot (Low)**

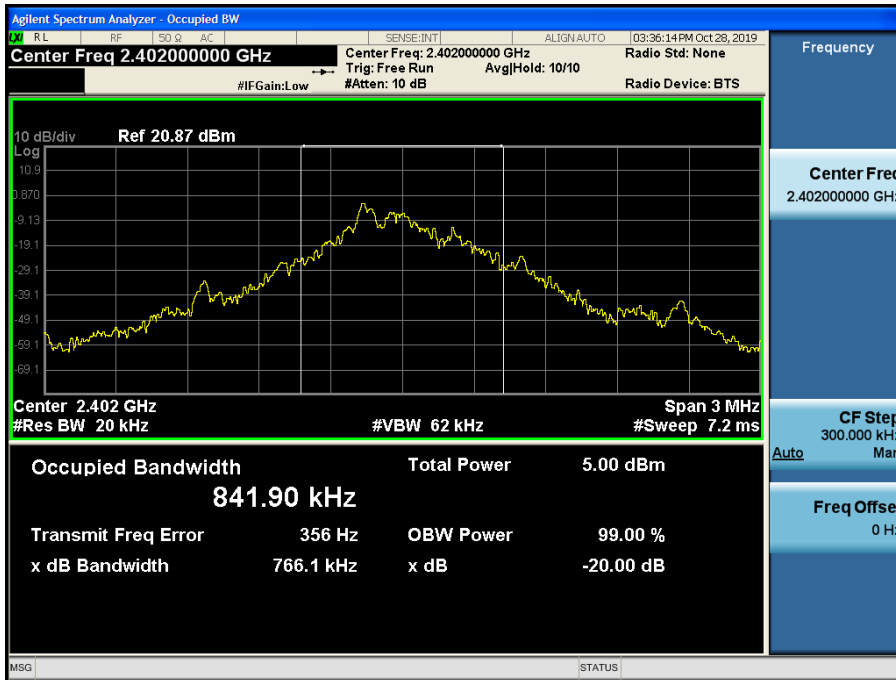

**Occupied Bandwidth plot (Mid)**

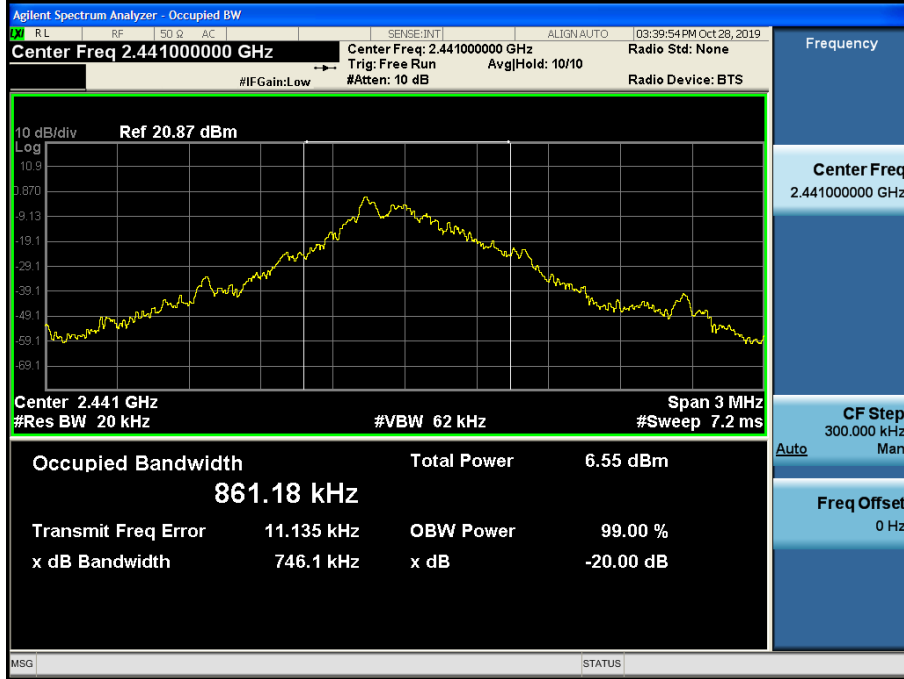

**Occupied Bandwidth plot (High)**

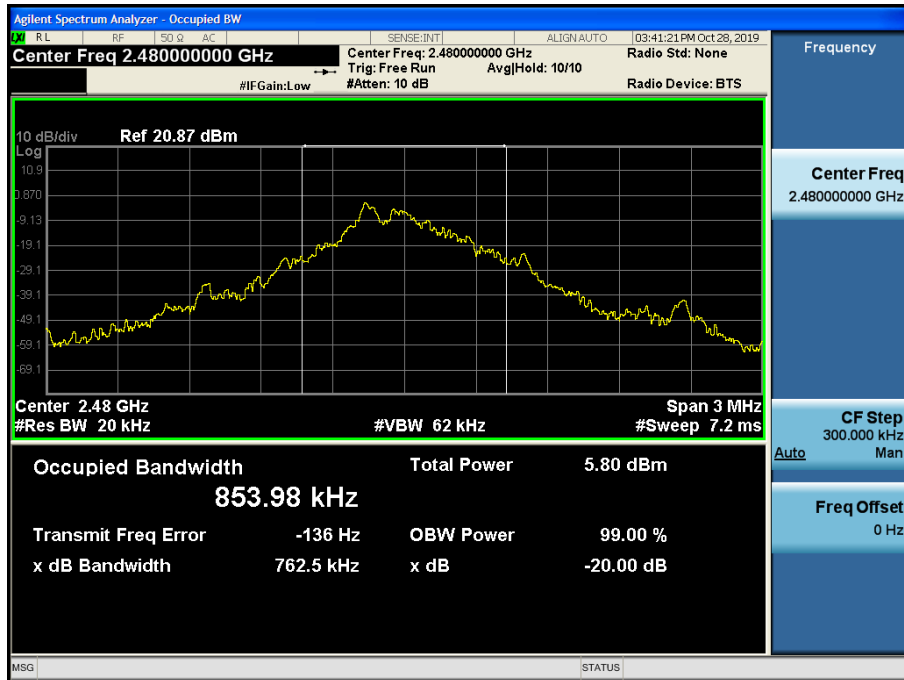


### 9.3 RADIATED MEASUREMENT.

#### 9.3.1 FUNDAMENTAL FIELD STRENGTH LEVEL MEASUREMENT

Frequency [MHz]	Reading [dBuV/m]	A.F.+C.L.-A.G +D.F+ATT. [dB]	Ant. Pol. [H/V]	D.C.C.F [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2402	91.93	0.49	V	0.00	92.42	113.98	21.56	PK
2402	91.93	0.49	V	-31.88	60.54	93.98	33.44	AV
2402	89.89	0.49	H	0.00	90.38	113.98	23.60	PK
2402	89.89	0.49	H	-31.88	58.50	93.98	35.48	AV
2441	92.06	1.28	V	0.00	<b>93.34</b>	113.98	20.64	PK
2441	92.06	1.28	V	-31.88	<b>61.46</b>	93.98	32.52	AV
2441	91.71	1.28	H	0.00	92.99	113.98	20.99	PK
2441	91.71	1.28	H	-31.88	61.11	93.98	32.87	AV
2480	92.04	1.15	V	0.00	93.19	113.98	20.79	PK
2480	92.04	1.15	V	-31.88	61.31	93.98	32.67	AV
2480	90.80	1.15	H	0.00	91.95	113.98	22.03	PK
2480	90.80	1.15	H	-31.88	60.07	93.98	33.91	AV

■ Test Plots (Worst case : Y-V)

Fundamental Field Strength plot (Ch.39)

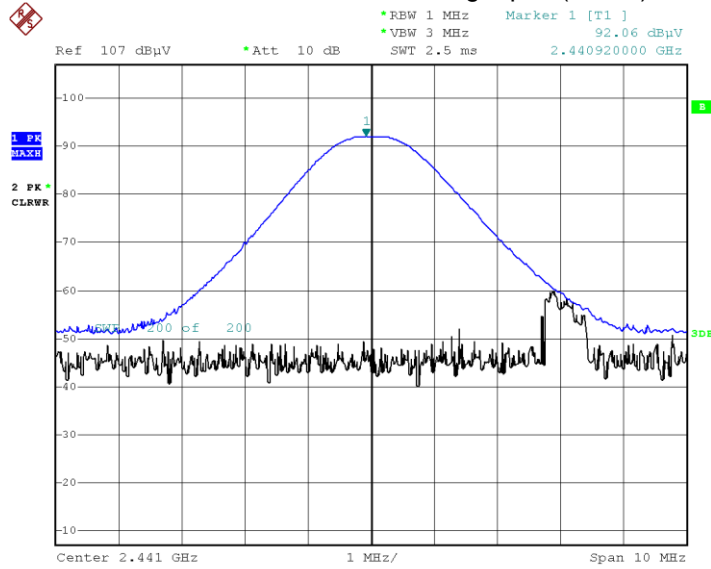

Date: 12.NOV.2019 17:08:24

**Note:**

Plot of worst case are only reported.

### 9.3.2 RADIATED SPURIOUS EMISSIONS

#### Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. The test results for below 30 MHz is correlated to an open site.  
The result on OATS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

#### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

**Frequency Range : Above 1 GHz**

Operation Frequency: 2402 MHz

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	50.95	1.83	V	52.78	73.98	21.20	PK
4804	39.12	1.83	V	40.95	53.98	13.03	AV
7206	49.75	9.65	V	59.40	73.98	14.58	PK
7206	37.88	9.65	V	47.53	53.98	6.45	AV
4804	51.41	1.83	H	53.24	73.98	20.74	PK
4804	40.03	1.83	H	41.86	53.98	12.12	AV
7206	50.74	9.65	H	60.39	73.98	13.59	PK
7206	38.74	9.65	H	48.39	53.98	5.59	AV

Operation Frequency: 2441 MHz


Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	50.98	2.31	V	53.29	73.98	20.69	PK
4882	39.08	2.31	V	41.39	53.98	12.59	AV
7323	49.26	9.96	V	59.22	73.98	14.76	PK
7323	38.22	9.96	V	48.18	53.98	5.80	AV
4882	51.32	2.31	H	53.63	73.98	20.35	PK
4882	39.10	2.31	H	41.41	53.98	12.57	AV
7323	50.61	9.96	H	60.57	73.98	13.41	PK
7323	38.59	9.96	H	48.55	53.98	5.43	AV

Operation Frequency: 2480 MHz

Frequency [MHz]	Reading [dBuV]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	50.31	2.26	V	52.57	73.98	21.41	PK
4960	38.82	2.26	V	41.08	53.98	12.90	AV
7440	49.76	9.78	V	59.54	73.98	14.44	PK
7440	38.02	9.78	V	47.80	53.98	6.18	AV
4960	50.64	2.26	H	52.90	73.98	21.08	PK
4960	39.14	2.26	H	41.40	53.98	12.58	AV
7440	50.12	9.78	H	59.90	73.98	14.08	PK
7440	38.39	9.78	H	48.17	53.98	5.81	AV


■ Test Plots (Worst case : X-H)

Radiated Spurious Emissions plot – Average Reading (Ch.39 3rd Harmonic)

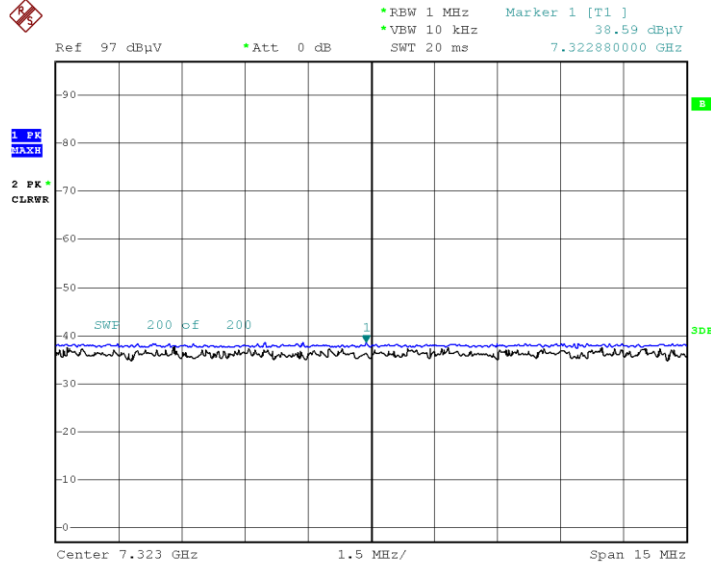

Date: 26.NOV.2019 16:46:07

Radiated Spurious Emissions plot – Peak Reading (Ch.39 3rd Harmonic)

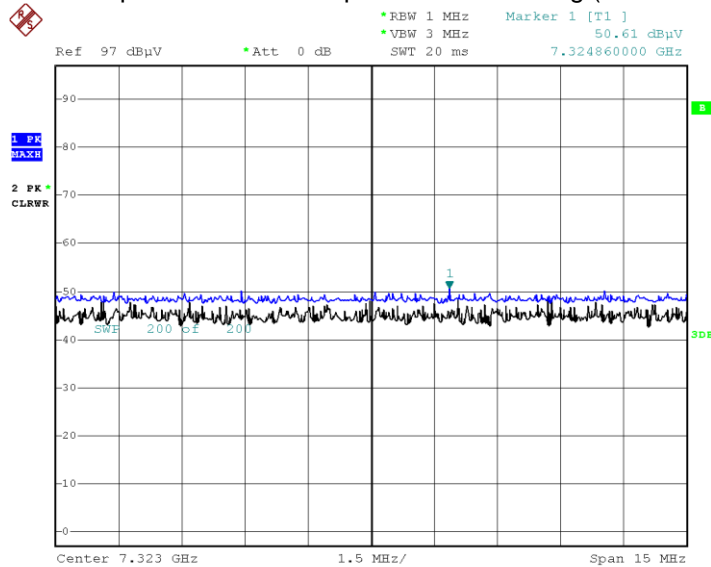

Date: 26.NOV.2019 16:47:05

**Note:**

Plot of worst case are only reported.

### 9.3.3 RADIATED BAND EDGES MEASUREMENTS

Operating Mode ANT+  
Test Frequency 2402 MHz


Frequency [MHz]	Reading [dBuV]	A.F+C.L-A.G +D.F+ATT [dB]	Pol. [H/V]	D.C.C.F [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2400.0	67.35	0.85	H	0.00	68.20	73.98	5.78	PK
2400.0	67.35	0.85	H	-31.88	36.32	53.98	17.66	AV
2400.0	70.74	0.85	V	0.00	71.59	73.98	2.39	PK
2400.0	70.74	0.85	V	-31.88	39.71	53.98	14.27	AV

Operating Mode ANT+  
Test Frequency 2480 MHz

Frequency [MHz]	Reading [dBuV]	A.F+C.L-A.G +D.F+ATT [dB]	Pol. [H/V]	D.C.C.F [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	53.96	1.15	H	0.00	55.11	73.98	18.87	PK
2483.5	53.96	1.15	H	-31.88	23.23	53.98	30.75	AV
2483.5	54.56	1.15	V	0.00	55.71	73.98	18.27	PK
2483.5	54.56	1.15	V	-31.88	23.83	53.98	30.15	AV

■ Test Plots (Worst case : Z-V)

Radiated Band Edges plot – Average & Peak Reading (Ch.0)

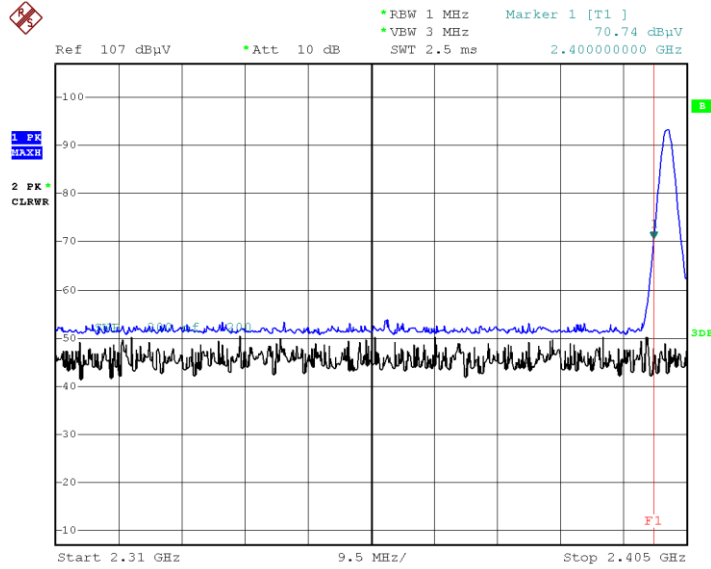

Date: 12.NOV.2019 17:17:15

**Note:**

Plot of worst case are only reported.

## 9.4 RECEIVER SPURIOUS EMISSIONS

### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

### Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

## 9.5 POWERLINE CONDUCTED EMISSIONS

### Conducted Emissions (Line 1)

Test


1 / 2

## HCT TEST Report

### Common Information

EUT: SM-T307U  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: ANT+\_L1

FCC CLASS B\_Exten Cable

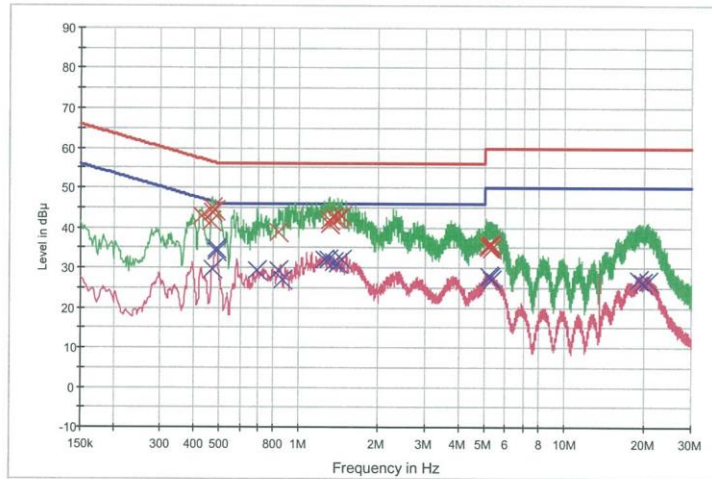

— FCC CLASS B\_QP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      × Final Result 1-QPK      × Final Result 2-CAV

### Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.432000	43.0	9.000	Off	L1	9.8	14.2	57.2
0.464000	41.5	9.000	Off	L1	9.8	15.2	56.6
0.470000	45.0	9.000	Off	L1	9.8	11.5	56.5
0.474000	44.0	9.000	Off	L1	9.8	12.5	56.4
0.484000	44.3	9.000	Off	L1	9.8	12.0	56.3
0.838000	38.9	9.000	Off	L1	9.9	17.1	56.0
1.298000	41.7	9.000	Off	L1	9.9	14.3	56.0
1.306000	40.9	9.000	Off	L1	9.9	15.1	56.0
1.346000	42.6	9.000	Off	L1	9.9	13.4	56.0
1.350000	42.4	9.000	Off	L1	9.9	13.6	56.0
1.398000	42.1	9.000	Off	L1	9.9	13.9	56.0
1.446000	42.8	9.000	Off	L1	9.9	13.2	56.0
5.160000	35.4	9.000	Off	L1	10.1	24.6	60.0
5.196000	35.2	9.000	Off	L1	10.1	24.8	60.0
5.252000	35.3	9.000	Off	L1	10.1	24.7	60.0
5.260000	35.6	9.000	Off	L1	10.1	24.4	60.0
5.310000	35.8	9.000	Off	L1	10.1	24.2	60.0
5.330000	34.8	9.000	Off	L1	10.1	25.2	60.0

2019-10-24

오후 2:51:39

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.472000	29.7	9.000	Off	L1	9.8	16.8	46.5
0.486000	34.6	9.000	Off	L1	9.8	11.6	46.2
0.490000	34.0	9.000	Off	L1	9.8	12.1	46.2
0.698000	29.2	9.000	Off	L1	9.8	16.8	46.0
0.838000	29.2	9.000	Off	L1	9.9	16.8	46.0
0.866000	26.9	9.000	Off	L1	9.9	19.1	46.0
1.248000	32.0	9.000	Off	L1	9.9	14.0	46.0
1.296000	32.1	9.000	Off	L1	9.9	13.9	46.0
1.346000	31.3	9.000	Off	L1	9.9	14.7	46.0
1.350000	31.2	9.000	Off	L1	9.9	14.8	46.0
1.400000	30.9	9.000	Off	L1	9.9	15.1	46.0
1.456000	32.1	9.000	Off	L1	9.9	13.9	46.0
5.196000	27.8	9.000	Off	L1	10.1	22.2	50.0
5.252000	27.7	9.000	Off	L1	10.1	22.3	50.0
5.330000	27.0	9.000	Off	L1	10.1	23.0	50.0
19.068000	26.9	9.000	Off	L1	10.7	23.1	50.0
19.684000	26.2	9.000	Off	L1	10.7	23.8	50.0
20.740000	26.7	9.000	Off	L1	10.7	23.3	50.0

2019-10-24

오후 2:51:39

**Conducted Emissions (Line 2)**

Test


1 / 2

**HCT TEST Report**

**Common Information**

EUT: SM-T307U  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: ANT+\_N

FCC CLASS B\_Exten Cable

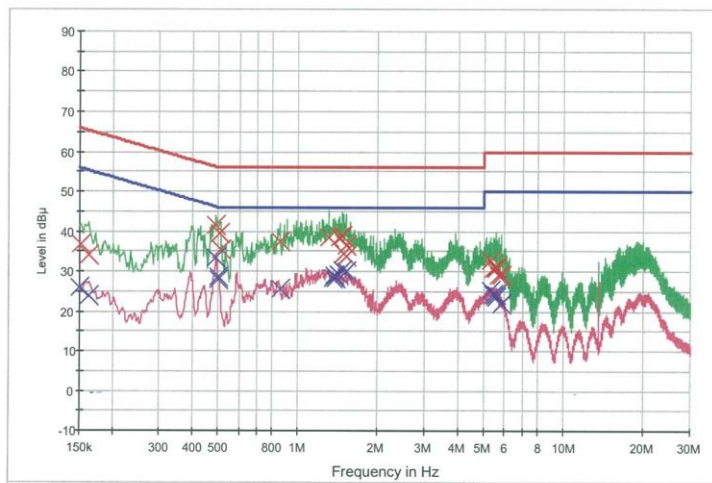

— FCC CLASS B\_QP    — FCC CLASS B\_AV    — Preview Result 1-PK+  
 — Preview Result 2-AVG    x Final Result 1-QPK    x Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	36.9	9.000	Off	N	9.8	29.0	65.9
0.162000	34.2	9.000	Off	N	9.8	31.1	65.4
0.490000	41.7	9.000	Off	N	9.8	14.5	56.2
0.506000	39.6	9.000	Off	N	9.8	16.4	56.0
0.510000	35.3	9.000	Off	N	9.8	20.7	56.0
0.856000	37.4	9.000	Off	N	9.8	18.6	56.0
1.310000	38.4	9.000	Off	N	9.9	17.6	56.0
1.426000	38.4	9.000	Off	N	9.9	17.6	56.0
1.470000	38.8	9.000	Off	N	9.9	17.2	56.0
1.480000	34.6	9.000	Off	N	9.9	21.4	56.0
1.512000	36.3	9.000	Off	N	9.9	19.7	56.0
1.526000	33.8	9.000	Off	N	9.9	22.2	56.0
5.314000	32.6	9.000	Off	N	10.1	27.4	60.0
5.464000	30.5	9.000	Off	N	10.1	29.5	60.0
5.556000	31.1	9.000	Off	N	10.1	28.9	60.0
5.560000	30.7	9.000	Off	N	10.1	29.3	60.0
5.714000	28.9	9.000	Off	N	10.1	31.1	60.0
5.820000	28.9	9.000	Off	N	10.1	31.1	60.0

2019-10-24

오후 2:42:33

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	25.9	9.000	Off	N	9.8	30.1	56.0
0.162000	24.0	9.000	Off	N	9.8	31.4	55.4
0.490000	33.5	9.000	Off	N	9.8	12.7	46.2
0.500000	28.7	9.000	Off	N	9.8	17.3	46.0
0.502000	27.8	9.000	Off	N	9.8	18.2	46.0
0.856000	25.7	9.000	Off	N	9.8	20.3	46.0
1.348000	28.2	9.000	Off	N	9.9	17.8	46.0
1.364000	28.8	9.000	Off	N	9.9	17.2	46.0
1.378000	28.3	9.000	Off	N	9.9	17.7	46.0
1.414000	29.5	9.000	Off	N	9.9	16.5	46.0
1.468000	30.2	9.000	Off	N	9.9	15.8	46.0
1.512000	29.9	9.000	Off	N	9.9	16.1	46.0
5.314000	25.3	9.000	Off	N	10.1	24.7	50.0
5.464000	24.1	9.000	Off	N	10.1	25.9	50.0
5.506000	24.1	9.000	Off	N	10.1	25.9	50.0
5.556000	24.1	9.000	Off	N	10.1	25.9	50.0
5.560000	23.4	9.000	Off	N	10.1	26.6	50.0
5.820000	21.8	9.000	Off	N	10.1	28.2	50.0

2019-10-24

오후 2:42:33

**Conducted Emissions (Line 3)**

Test


1 / 2

**HCT TEST Report**

**Common Information**

EUT: SM-T307U  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: ANT+\_L1\_Fast Charge

FCC CLASS B\_Exten Cable

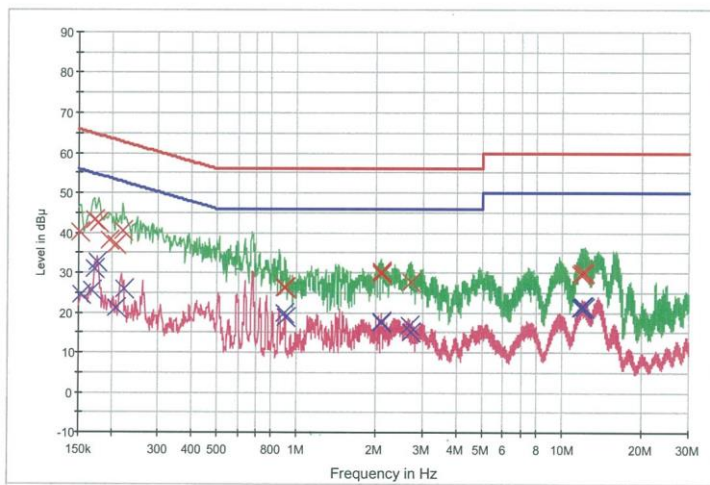

— FCC CLASS B\_QP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      × Final Result 1-QPK      × Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.152000	40.1	9.000	Off	L1	9.8	25.8	65.9
0.172000	43.3	9.000	Off	L1	9.8	21.5	64.9
0.178000	42.7	9.000	Off	L1	9.8	21.9	64.6
0.196000	38.0	9.000	Off	L1	9.8	25.7	63.8
0.208000	37.0	9.000	Off	L1	9.8	26.3	63.3
0.220000	40.6	9.000	Off	L1	9.8	22.3	62.8
0.900000	26.2	9.000	Off	L1	9.9	29.8	56.0
0.904000	26.4	9.000	Off	L1	9.9	29.6	56.0
2.074000	29.9	9.000	Off	L1	9.9	26.1	56.0
2.080000	30.2	9.000	Off	L1	9.9	25.8	56.0
2.090000	29.6	9.000	Off	L1	9.9	26.4	56.0
2.688000	27.5	9.000	Off	L1	9.9	28.5	56.0
11.812000	29.6	9.000	Off	L1	10.4	30.4	60.0
11.906000	30.1	9.000	Off	L1	10.4	29.9	60.0
11.958000	29.9	9.000	Off	L1	10.4	30.1	60.0
12.006000	29.8	9.000	Off	L1	10.4	30.2	60.0
12.194000	30.0	9.000	Off	L1	10.4	30.0	60.0
12.220000	29.9	9.000	Off	L1	10.4	30.1	60.0

2019-11-20

오후 2:47:14

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.154000	24.4	9.000	Off	L1	9.8	31.4	55.8
0.168000	25.7	9.000	Off	L1	9.8	29.4	55.1
0.172000	30.9	9.000	Off	L1	9.8	24.0	54.9
0.176000	32.6	9.000	Off	L1	9.8	22.0	54.7
0.208000	21.1	9.000	Off	L1	9.8	32.2	53.3
0.222000	25.8	9.000	Off	L1	9.8	27.0	52.7
0.900000	19.8	9.000	Off	L1	9.9	26.2	46.0
0.904000	19.0	9.000	Off	L1	9.9	27.0	46.0
2.082000	17.6	9.000	Off	L1	9.9	28.4	46.0
2.086000	17.8	9.000	Off	L1	9.9	28.2	46.0
2.678000	16.8	9.000	Off	L1	9.9	29.2	46.0
2.688000	15.2	9.000	Off	L1	9.9	30.8	46.0
11.812000	21.1	9.000	Off	L1	10.4	28.9	50.0
11.906000	21.4	9.000	Off	L1	10.4	28.6	50.0
11.958000	21.3	9.000	Off	L1	10.4	28.7	50.0
12.110000	21.4	9.000	Off	L1	10.4	28.6	50.0
12.220000	21.2	9.000	Off	L1	10.4	28.8	50.0
12.246000	21.1	9.000	Off	L1	10.4	28.9	50.0

2019-11-20

오후 2:47:14

**Conducted Emissions (Line 4)**

Test


1 / 2

**HCT TEST Report**

**Common Information**

EUT: SM-T307U  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: ANT+\_N\_Fast Charge

FCC CLASS B\_Exten Cable

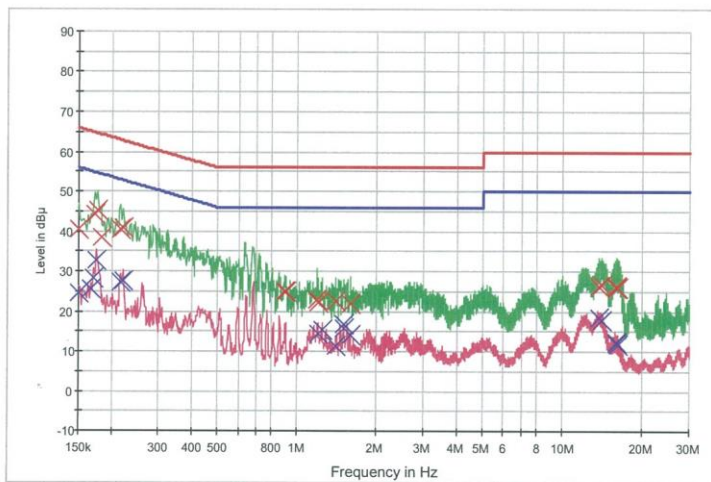

— FCC CLASS B\_QP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      × Final Result 1-QPK      × Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	40.4	9.000	Off	N	9.8	25.6	66.0
0.172000	44.3	9.000	Off	N	9.8	20.6	64.9
0.176000	45.3	9.000	Off	N	9.8	19.4	64.7
0.182000	38.4	9.000	Off	N	9.8	26.0	64.4
0.216000	40.6	9.000	Off	N	9.8	22.3	63.0
0.220000	40.9	9.000	Off	N	9.8	21.9	62.8
0.902000	24.8	9.000	Off	N	9.9	31.2	56.0
0.906000	25.0	9.000	Off	N	9.9	31.0	56.0
1.192000	22.8	9.000	Off	N	9.9	33.2	56.0
1.208000	22.1	9.000	Off	N	9.9	33.9	56.0
1.398000	22.6	9.000	Off	N	9.9	33.4	56.0
1.586000	21.9	9.000	Off	N	9.9	34.1	56.0
13.752000	26.4	9.000	Off	N	10.5	33.6	60.0
14.012000	26.7	9.000	Off	N	10.5	33.3	60.0
15.880000	26.2	9.000	Off	N	10.6	33.8	60.0
15.916000	25.9	9.000	Off	N	10.6	34.1	60.0
15.932000	26.2	9.000	Off	N	10.6	33.8	60.0
16.092000	26.0	9.000	Off	N	10.6	34.0	60.0

2019-11-20

오후 2:37:49

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	24.4	9.000	Off	N	9.8	31.6	56.0
0.166000	25.5	9.000	Off	N	9.8	29.7	55.2
0.170000	28.4	9.000	Off	N	9.8	26.5	55.0
0.174000	32.6	9.000	Off	N	9.8	22.2	54.8
0.216000	27.3	9.000	Off	N	9.8	25.7	53.0
0.220000	27.7	9.000	Off	N	9.8	25.1	52.8
1.208000	14.4	9.000	Off	N	9.9	31.6	46.0
1.244000	15.5	9.000	Off	N	9.9	30.5	46.0
1.398000	11.5	9.000	Off	N	9.9	34.5	46.0
1.496000	15.7	9.000	Off	N	9.9	30.3	46.0
1.502000	16.7	9.000	Off	N	9.9	29.3	46.0
1.586000	14.1	9.000	Off	N	9.9	31.9	46.0
13.752000	18.5	9.000	Off	N	10.5	31.5	50.0
14.012000	18.0	9.000	Off	N	10.5	32.0	50.0
15.880000	12.2	9.000	Off	N	10.6	37.8	50.0
15.932000	12.1	9.000	Off	N	10.6	38.0	50.0
15.990000	12.0	9.000	Off	N	10.6	38.0	50.0
16.092000	11.7	9.000	Off	N	10.6	38.3	50.0

2019-11-20

오후 2:37:49

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/11/2019	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/18/2019	Annual	100584
ESPACE	SU-642 /Temperature Chamber	03/12/2019	Annual	0093008124
Agilent	N9020A / Signal Analyzer	05/23/2019	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	05/09/2019	Annual	MY49432108
Agilent	N1911A / Power Meter	04/10/2019	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/10/2019	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/11/2019	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/24/2019	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/18/2019	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/02/2019	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/16/2019	Annual	100422

### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

**Radiated Test**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	08/23/2018	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/31/2018	Biennial	00895
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/09/2018	Biennial	3368
Schwarzbeck	BBHA 9120D / Horn Antenna	06/28/2019	Biennial	1300
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/29/2019	Biennial	BBHA9170342
Rohde & Schwarz	FSP(9 kHz ~ 40 GHz) / Spectrum Analyzer	07/16/2019	Annual	100843
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	01/03/2019	Annual	F6
Wainwright Instruments	WHFX7.0/18G-8SS / High Pass Filter	05/03/2019	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/19/2019	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2019	Annual	2
Weinschel	2-3 / Attenuator (3 dB)	10/08/2019	Annual	BR0617
H+S	5910-N-50-010 / Attenuator(10 dB)	10/29/2019	Annual	None
CERNEX	CBLU1183540B-01 / Power Amplifier	12/21/2018	Annual	25540
CERNEX	CBL06185030 / Power Amplifier	03/26/2019	Annual	28550
CERNEX	CBL18265035 / Power Amplifier	01/03/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/18/2019	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/26/2019	Annual	3000C000276

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

## 11. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1911-FI024-P