

FCC/IC LTE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
December 23, 2019

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
Report No.: HCT-RF-1912-FI012-R1

FCC ID:	A3LSMT307U
IC:	649E-SMT307U
APPLICANT:	SAMSUNG Electronics Co., Ltd.

Model(s): SM-T307U
 EUT Type: Tablet
 FCC Classification: PCS Licensed Transmitter (PCB)
 FCC Rule Part(s): §27, §2
 IC Rule(s): RSS-Gen Issue5, RSS-130 Issue2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band12 (1.4)	699.7 – 715.3	1M10G7D	QPSK	0.070	18.43
		1M10W7D	16QAM	0.053	17.27
		1M10W7D	64QAM	0.043	16.35
LTE – Band12 (3)	700.5 – 714.5	2M72G7D	QPSK	0.069	18.36
		2M72W7D	16QAM	0.054	17.34
		2M70W7D	64QAM	0.044	16.48
LTE – Band12 (5)	701.5 – 713.5	4M52G7D	QPSK	0.068	18.33
		4M52W7D	16QAM	0.054	17.31
		4M53W7D	64QAM	0.043	16.31
LTE – Band12 (10)	704.0 – 711.0	8M97G7D	QPSK	0.063	18.01
		9M01W7D	16QAM	0.050	16.95
		8M96W7D	64QAM	0.040	16.04

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



Report prepared by : Jae Ryang Do
Engineer of Telecommunication Testing Center



Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1912-FI012	December 11, 2019	- First Approval Report
HCT-RF-1912-FI012-R1	December 23, 2019	- Added test procedure to Section 3.10.

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.(HCT Accreditation No.: KT197)

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. DESCRIPTION OF EUT.....	5
2.2. MEASURING INSTRUMENT CALIBRATION	5
2.3. TEST FACILITY	5
3. DESCRIPTION OF TESTS.....	6
3.1 TEST PROCEDURE	6
3.2 RADIATED POWER.....	7
3.3 RADIATED SPURIOUS EMISSIONS	8
3.4 OCCUPIED BANDWIDTH.	9
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	10
3.6 BAND EDGE	11
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	12
3.8 WORST CASE(RADIATED TEST)	13
3.9 WORST CASE(CONDUCTED TEST)	14
3.10 RECEIVER SPURIOUS EMISSIONS	15
4. LIST OF TEST EQUIPMENT	17
5. MEASUREMENT UNCERTAINTY	18
6. SUMMARY OF TEST RESULTS	19
7. SAMPLE CALCULATION.....	20
8. TEST DATA	22
8.1 EFFECTIVE RADIATED POWER.....	22
8.2 RADIATED SPURIOUS EMISSIONS	24
8.3 OCCUPIED BANDWIDTH	28
8.4 CONDUCTED SPURIOUS EMISSIONS	29
8.5 BAND EDGE	29
8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	30
8.7 RECEIVER SPURIOUS EMISSIONS	42
9. TEST PLOTS.....	43
10. ANNEX A_ TEST SETUP PHOTO.....	94

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMT307U
IC	649E-SMT307U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§27, §2
IC Rule(s):	RSS-Gen Issue5, RSS-130 Issue2
EUT Type:	Tablet
Model(s):	SM-T307U
Tx Frequency:	699.7 MHz – 715.3 MHz (LTE – Band 12 (1.4 MHz)) 700.5 MHz – 714.5 MHz (LTE – Band 12 (3 MHz)) 701.5 MHz – 713.5 MHz (LTE – Band 12(5 MHz)) 704.0 MHz – 711.0 MHz (LTE – Band 12(10 MHz))
Date(s) of Tests:	October 22, 2019 ~ November 25, 2019

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Tablet with UMTS and LTE.

It also supports IEEE 802.11 a/b/g/n/ac (HT20/40/80), Bluetooth, BT LE, ANT+.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dB})}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamatal frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 OCCUPIED BANDWIDTH.

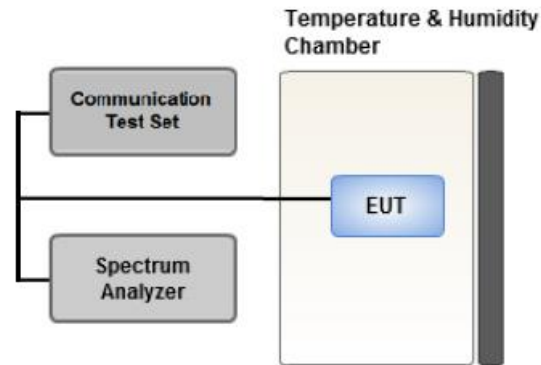

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

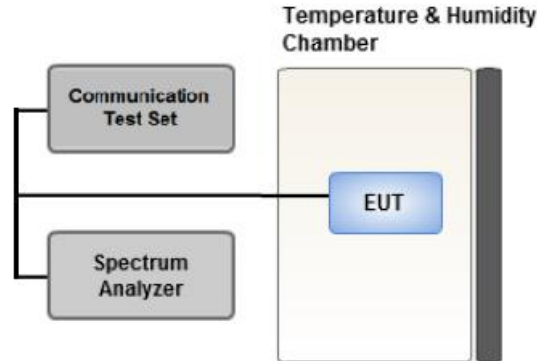

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 * Span / RBW

3.6 BAND EDGE

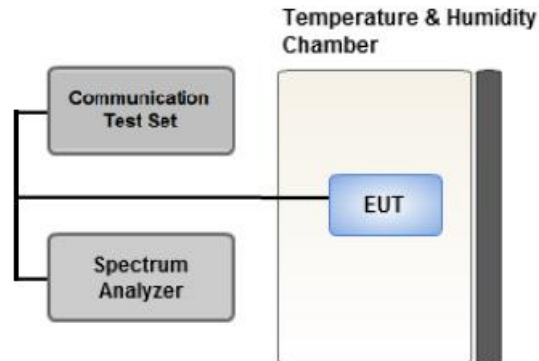

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

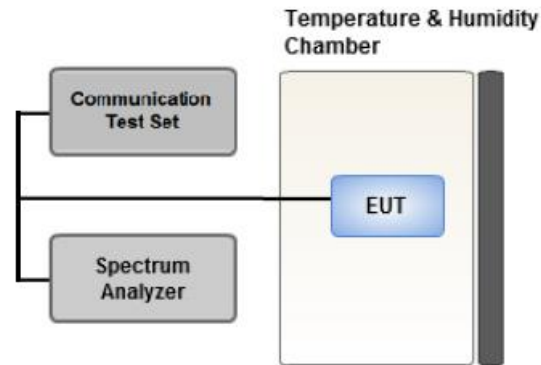

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK,	1	0	X
	16QAM,			
	64QAM			
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Y

3.9 WORST CASE(CONDUCTED TEST)

- Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

Conducted Output Power value can be confirmed on the SAR report.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM	1.4, 3, 5, 10	Mid	Full RB	0
Band Edge	* QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
1.4, 3, 5, 10	Low, High	Full RB	0		
	Low, Mid, High	1	0		
Spurious and Harmonic Emissions at Antenna Terminal	* QPSK	1.4, 3, 5, 10	Low, Mid, High	1	0

3.10 RECEIVER SPURIOUS EMISSIONS

Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
 - ◆ Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average):
 - We performed using a reduced video BW method was done with the analyzer in linear mode
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds

The actual setting value of VBW = 1 kHz
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibrati on Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	06/10/2019	Annual	06/10/2020
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	06/10/2019	Annual	06/10/2020
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	05/03/2019	Annual	05/03/2020
Agilent	E3632A/DC Power Supply	MY40004326	07/01/2019	Annual	07/01/2020
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93000717	08/14/2019	Annual	08/14/2020
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	01/28/2019	Biennial	01/28/2021
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	05/08/2019	Annual	05/08/2020
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2019	Annual	06/04/2020
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/14/2019	Annual	10/14/2020
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/27/2019	Annual	08/27/2020
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	08/23/2018	Biennial	08/23/2020
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6201502997	08/09/2019	Annual	08/09/2020
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/30/2019	Annual	01/30/2020
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/15/2019	Annual	07/15/2020
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	05/17/2019	Annual	05/17/2020
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	IC Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	RSS Gen(6.7)	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(g)	RSS 130(4.7)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	-	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	RSS 130(4.5)	Emission must remain in band	PASS

Note:

1. See SAR Report
2. The same samples were used for SAR and EMC

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	IC Section(s)	Test Limit	Test Result
Effective Radiated Power	§27.50(c)(10)	RSS 130(4.6)	< 3 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(g)	RSS 130(4.7)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS
Receiver Spurious Emissions	N/A	RSS Gen(7)	Section 8.7	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

64QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W
699.7	LTE B12 (1.4 MHz)	QPSK	-32.34	28.42	-9.92	1.18	H	< 3.00	0.054	17.32
		16-QAM	-33.52	27.24	-9.92	1.18	H		0.041	16.14
		64-QAM	-34.45	26.31	-9.92	1.18	H		0.033	15.21
707.5		QPSK	-31.61	29.16	-9.93	1.18	H		0.064	18.05
		16-QAM	-32.78	27.99	-9.93	1.18	H		0.049	16.88
		64-QAM	-33.70	27.07	-9.93	1.18	H		0.039	15.96
715.3		QPSK	-30.94	29.56	-9.94	1.19	H		0.070	18.43
		16-QAM	-32.10	28.40	-9.94	1.19	H		0.053	17.27
		64-QAM	-33.02	27.48	-9.94	1.19	H		0.043	16.35

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W
700.5	LTE B12 (3 MHz)	QPSK	-32.23	28.55	-9.92	1.18	H	< 3.00	0.056	17.45
		16-QAM	-33.35	27.43	-9.92	1.18	H		0.043	16.33
		64-QAM	-34.26	26.52	-9.92	1.18	H		0.035	15.42
707.5		QPSK	-31.67	29.10	-9.93	1.18	H		0.063	17.99
		16-QAM	-32.73	28.04	-9.93	1.18	H		0.049	16.93
		64-QAM	-33.54	27.23	-9.93	1.18	H		0.041	16.12
714.5		QPSK	-31.03	29.49	-9.94	1.19	H		0.069	18.36
		16-QAM	-32.05	28.47	-9.94	1.19	H		0.054	17.34
		64-QAM	-32.91	27.61	-9.94	1.19	H		0.044	16.48

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W
701.5	LTE B12 (5 MHz)	QPSK	-32.24	28.56	-9.92	1.18	H	< 3.00	0.056	17.46
		16-QAM	-33.31	27.49	-9.92	1.18	H		0.044	16.39
		64-QAM	-34.34	26.46	-9.92	1.18	H		0.034	15.36
707.5		QPSK	-31.73	29.04	-9.93	1.18	H		0.062	17.93
		16-QAM	-32.79	27.98	-9.93	1.18	H		0.049	16.87
		64-QAM	-33.78	26.99	-9.93	1.18	H		0.039	15.88
713.5		QPSK	-31.12	29.45	-9.94	1.18	H		0.068	18.33
		16-QAM	-32.14	28.43	-9.94	1.18	H		0.054	17.31
		64-QAM	-33.14	27.43	-9.94	1.18	H		0.043	16.31

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W
704.0	LTE B12 (10 MHz)	QPSK	-32.25	28.59	-9.92	1.18	H	< 3.00	0.056	17.49
		16-QAM	-33.34	27.50	-9.92	1.18	H		0.044	16.40
		64-QAM	-34.32	26.52	-9.92	1.18	H		0.035	15.42
707.5		QPSK	-31.84	28.93	-9.93	1.18	H		0.061	17.82
		16-QAM	-32.97	27.80	-9.93	1.18	H		0.047	16.69
		64-QAM	-34.05	26.72	-9.93	1.18	H		0.036	15.61
711.0		QPSK	-31.56	29.13	-9.94	1.18	H		0.063	18.01
		16-QAM	-32.62	28.07	-9.94	1.18	H		0.050	16.95
		64-QAM	-33.53	27.16	-9.94	1.18	H		0.040	16.04

8.2 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 715.3 MHz
- ▣ MEASURED OUTPUT POWER: 20.58 dBm = 0.114 W
- ▣ MODE: LTE B12
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 33.58 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23017 (699.7)	1,399.40	-50.66	7.60	-59.75	1.70	H	-53.85	74.43
	2,099.10	-55.30	9.80	-59.72	2.10	H	-52.02	72.60
	2,798.80	-55.95	10.90	-58.62	2.45	V	-50.17	70.75
23095 (707.5)	1,415.00	-52.11	7.72	-61.28	1.71	V	-55.27	75.85
	2,122.50	-56.31	9.55	-60.45	2.11	V	-53.01	73.59
	2,830.00	-56.79	10.95	-58.87	2.47	V	-50.39	70.97
23173 (715.3)	1,430.60	-51.77	7.75	-61.11	1.70	V	-55.06	75.64
	2,145.90	-55.20	9.37	-59.07	2.12	V	-51.82	72.40
	2,861.20	-56.23	11.03	-58.35	2.47	V	-49.79	70.37

- ▣ OPERATING FREQUENCY: 714.5 MHz
- ▣ MEASURED OUTPUT POWER: 20.51 dBm = 0.113 W
- ▣ MODE: LTE B12
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 33.51 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23025 (700.5)	1,401.00	-50.91	7.60	-60.00	1.70	V	-54.10	74.61
	2,101.50	-55.50	9.80	-59.92	2.10	V	-52.22	72.74
	2,802.00	-57.01	10.90	-59.68	2.45	H	-51.23	71.75
23095 (707.5)	1,415.00	-51.71	7.72	-60.88	1.71	V	-54.87	75.38
	2,122.50	-56.25	9.55	-60.39	2.11	V	-52.95	73.46
	2,830.00	-57.13	10.95	-59.21	2.47	H	-50.73	71.24
23165 (714.5)	1,429.00	-52.38	7.75	-61.72	1.70	V	-55.67	76.18
	2,143.50	-56.43	9.37	-60.30	2.12	V	-53.05	73.56
	2,858.00	-57.49	11.03	-59.61	2.47	V	-51.05	71.57

- ▣ OPERATING FREQUENCY: 713.5 MHz
- ▣ MEASURED OUTPUT POWER: 20.48 dBm = 0.112 W
- ▣ MODE: LTE B12
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 33.48 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23035 (701.5)	1,403.00	-52.08	7.60	-61.17	1.70	V	-55.27	75.75
	2,104.50	-56.70	9.74	-61.28	2.10	V	-53.64	74.12
	2,806.00	-57.40	10.92	-59.76	2.46	V	-51.30	71.78
23095 (707.5)	1,415.00	-51.82	7.72	-60.99	1.71	V	-54.98	75.46
	2,122.50	-57.13	9.55	-61.27	2.11	V	-53.83	74.31
	2,830.00	-57.47	10.95	-59.55	2.47	V	-51.07	71.55
23155 (713.5)	1,427.00	-52.75	7.75	-62.09	1.70	V	-56.04	76.52
	2,140.50	-56.50	9.43	-60.49	2.11	V	-53.17	73.66
	2,854.00	-57.48	11.02	-59.71	2.47	H	-51.16	71.64

- ▣ OPERATING FREQUENCY: 711.0 MHz
- ▣ MEASURED OUTPUT POWER: 20.16 dBm = 0.104 W
- ▣ MODE: LTE B12
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 33.16 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23060 (704.0)	1,408.00	-52.89	7.68	-62.35	1.70	V	-56.37	76.53
	2,112.00	-55.34	9.68	-60.08	2.10	V	-52.50	72.66
	2,816.00	-56.65	10.94	-58.85	2.47	V	-50.38	70.54
23095 (707.5)	1,415.00	-52.52	7.72	-61.69	1.71	V	-55.68	75.84
	2,122.50	-55.91	9.55	-60.05	2.11	H	-52.61	72.77
	2,830.00	-56.93	10.95	-59.01	2.47	V	-50.53	70.69
23130 (711.0)	1,422.00	-52.66	7.75	-61.53	1.71	H	-55.49	75.65
	2,133.00	-56.81	9.55	-61.05	2.11	V	-53.61	73.78
	2,844.00	-57.07	10.99	-59.30	2.46	H	-50.77	70.93

8.3 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
12	1.4 MHz	707.5	QPSK	6	0	1.0962
			16-QAM			1.1022
			64-QAM			1.0981
	3 MHz		QPSK	15		2.7222
			16-QAM			2.7223
			64-QAM			2.6990
	5 MHz		QPSK	25		4.5152
			16-QAM			4.5169
			64-QAM			4.5295
	10 MHz	QPSK	50	8.9700		
		16-QAM		9.0102		
		64-QAM		8.9569		

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 44 ~ 55.

8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
12	1.4	699.7	3.7034	27.976	-66.821	-38.845	-13.00
		707.5	3.7224	27.976	-67.338	-39.362	
		715.3	3.6810	27.976	-67.057	-39.081	
	3	700.5	3.7224	27.976	-66.863	-38.887	
		707.5	3.7189	27.976	-67.224	-39.248	
		714.5	3.6965	27.976	-67.218	-39.242	
	5	701.5	3.6995	27.976	-67.109	-39.133	
		707.5	3.7089	27.976	-66.932	-38.956	
		713.5	3.7179	27.976	-67.111	-39.135	
	10	704.0	3.7104	27.976	-67.338	-39.362	
		707.5	3.6880	27.976	-67.114	-39.138	
		711.0	3.7069	27.976	-67.193	-39.217	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 82 ~ 93.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


8.5 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 56 ~ 81.

8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 699,700,000 Hz
- ▣ CHANNEL: 23017 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	699 700 007	0.0	0.000 000	0.000
100%		-30	699 700 002	-5.0	-0.000 001	-0.007
100%		-20	699 700 004	-3.4	0.000 000	-0.005
100%		-10	699 700 013	6.0	0.000 001	0.009
100%		0	699 700 012	4.8	0.000 001	0.007
100%		+10	699 700 010	3.2	0.000 000	0.005
100%		+30	699 700 004	-3.4	0.000 000	-0.005
100%		+40	699 700 004	-2.7	0.000 000	-0.004
100%		+50	699 700 015	7.8	0.000 001	0.011
Batt. Endpoint	7.300	+20	699 699 999	-8.0	-0.000 001	-0.011

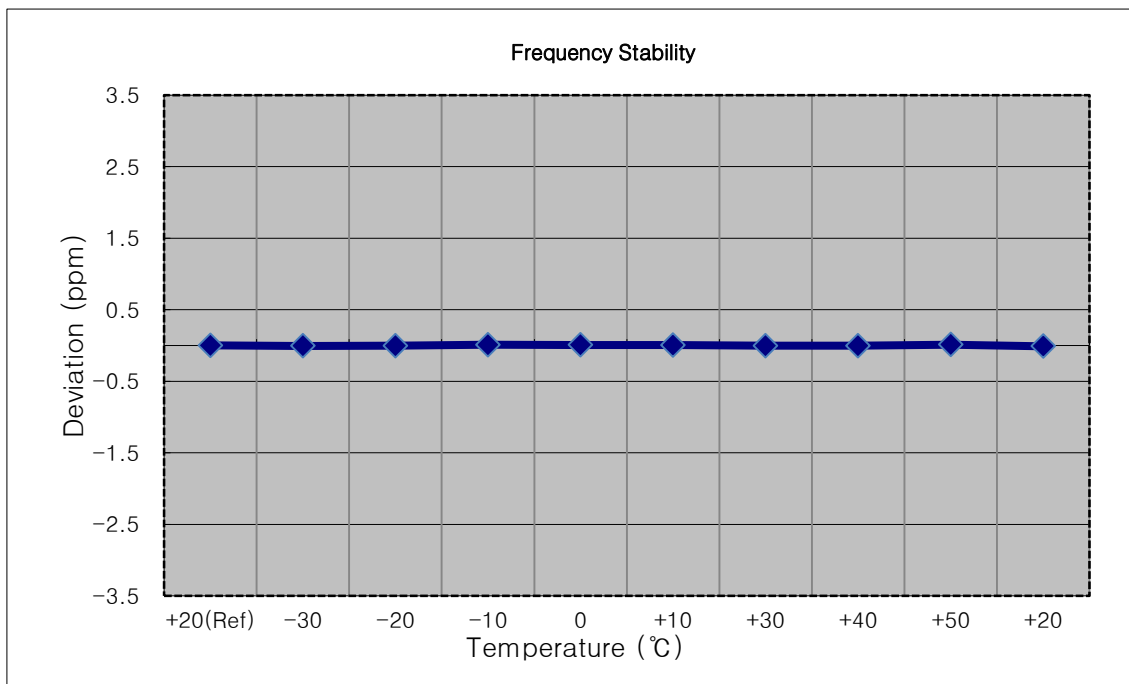


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 700,500,000 Hz
- ▣ CHANNEL: 23025 (3 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	700 499 995	0.0	0.000 000	0.000
100%		-30	700 499 990	-5.8	-0.000 001	-0.008
100%		-20	700 500 003	7.3	0.000 001	0.010
100%		-10	700 500 001	5.6	0.000 001	0.008
100%		0	700 499 989	-6.0	-0.000 001	-0.009
100%		+10	700 500 004	8.3	0.000 001	0.012
100%		+30	700 500 003	7.8	0.000 001	0.011
100%		+40	700 499 998	2.7	0.000 000	0.004
100%		+50	700 499 989	700 499 989	-6.8	-0.000 001
Batt. Endpoint	7.300	+20	700 500 004	8.3	0.000 001	0.012

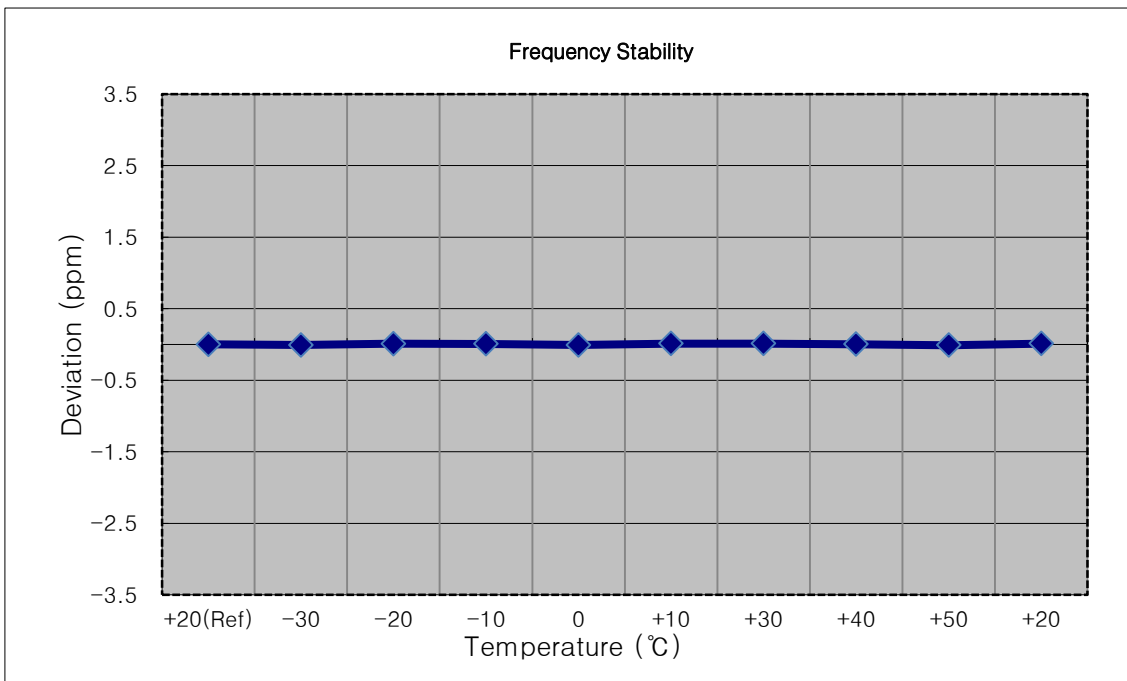


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 701,500,000 Hz
- ▣ CHANNEL: 23035 (5 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	701 499 988	0.0	0.000 000	0.000
100%		-30	701 499 981	-7.0	-0.000 001	-0.010
100%		-20	701 499 977	-10.5	-0.000 001	-0.015
100%		-10	701 499 992	4.1	0.000 001	0.006
100%		0	701 499 997	9.1	0.000 001	0.013
100%		+10	701 499 993	5.3	0.000 001	0.008
100%		+30	701 499 995	7.0	0.000 001	0.010
100%		+40	701 499 992	4.5	0.000 001	0.006
100%		+50	701 499 994	6.2	0.000 001	0.009
Batt. Endpoint	7.300	+20	701 499 978	-9.3	-0.000 001	-0.013

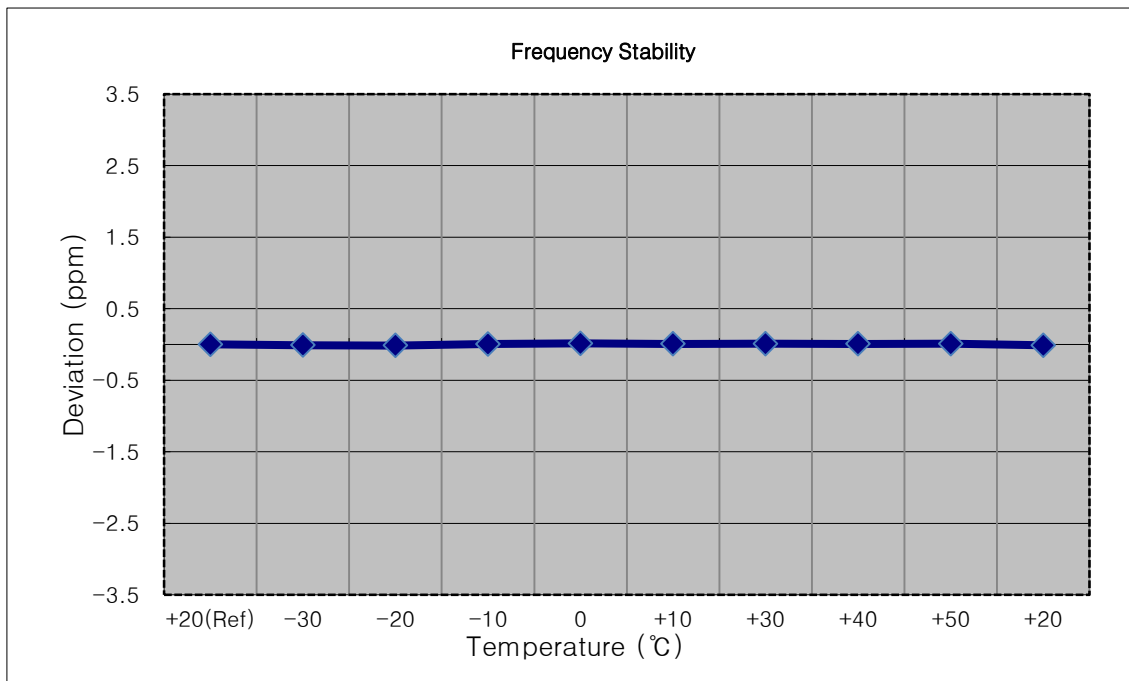


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 704,000,000 Hz
- ▣ CHANNEL: 23060 (10 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	704 000 009	0.0	0.000 000	0.000
100%		-30	703 999 999	-9.2	-0.000 001	-0.013
100%		-20	704 000 019	10.6	0.000 002	0.015
100%		-10	704 000 000	-8.8	-0.000 001	-0.012
100%		0	703 999 996	-12.4	-0.000 002	-0.018
100%		+10	704 000 016	7.8	0.000 001	0.011
100%		+30	703 999 995	-14.0	-0.000 002	-0.020
100%		+40	704 000 019	10.0	0.000 001	0.014
100%		+50	703 999 998	-11.0	-0.000 002	-0.016
Batt. Endpoint	7.300	+20	704 000 000	-8.9	-0.000 001	-0.013

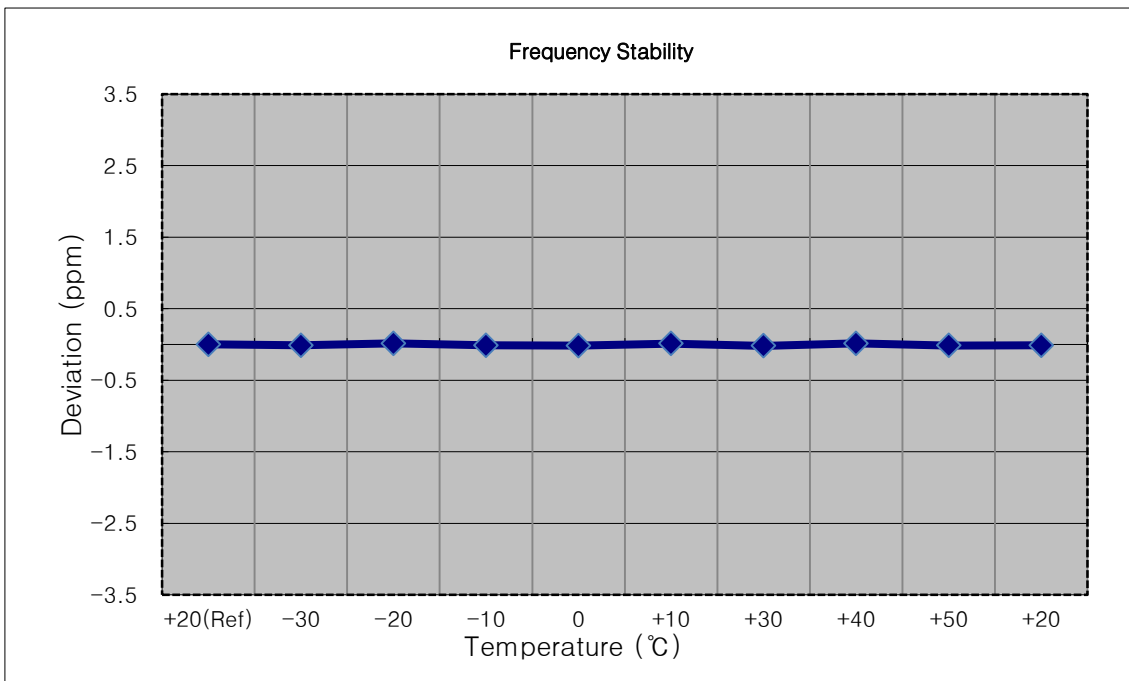


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 707,500,000 Hz
- ▣ CHANNEL: 23095 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	707 499 997	0.0	0.000 000	0.000
100%		-30	707 499 991	-5.8	-0.000 001	-0.008
100%		-20	707 500 000	3.3	0.000 000	0.005
100%		-10	707 500 002	5.2	0.000 001	0.007
100%		0	707 500 001	4.7	0.000 001	0.007
100%		+10	707 499 993	-3.9	-0.000 001	-0.006
100%		+30	707 499 988	-8.4	-0.000 001	-0.012
100%		+40	707 499 994	-2.6	0.000 000	-0.004
100%		+50	707 499 992	-4.7	-0.000 001	-0.007
Batt. Endpoint	7.300	+20	707 500 002	5.0	0.000 001	0.007

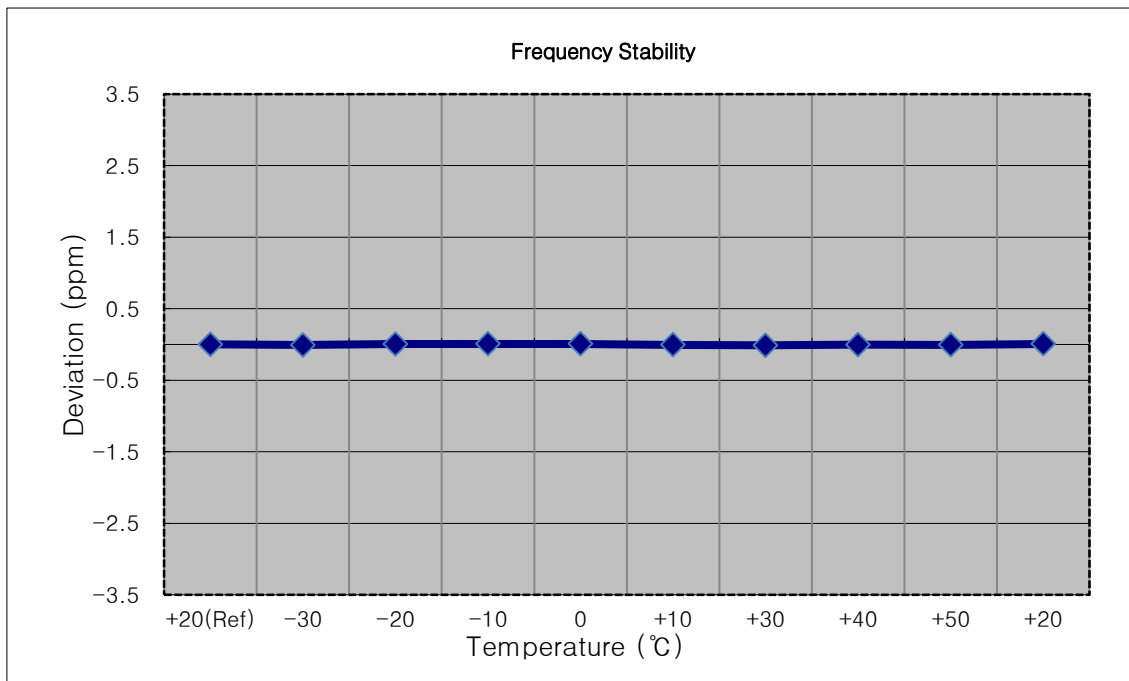


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 707,500,000 Hz
- ▣ CHANNEL: 23095 (3 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	707 500 007	0.0	0.000 000	0.000
100%		-30	707 500 001	-5.8	-0.000 001	-0.008
100%		-20	707 500 002	-5.6	-0.000 001	-0.008
100%		-10	707 500 014	7.0	0.000 001	0.010
100%		0	707 500 003	-3.8	-0.000 001	-0.005
100%		+10	707 500 014	7.0	0.000 001	0.010
100%		+30	707 500 002	-5.4	-0.000 001	-0.008
100%		+40	707 500 013	5.6	0.000 001	0.008
100%		+50	707 500 000	-7.5	-0.000 001	-0.011
Batt. Endpoint	7.300	+20	707 500 003	-4.3	-0.000 001	-0.006

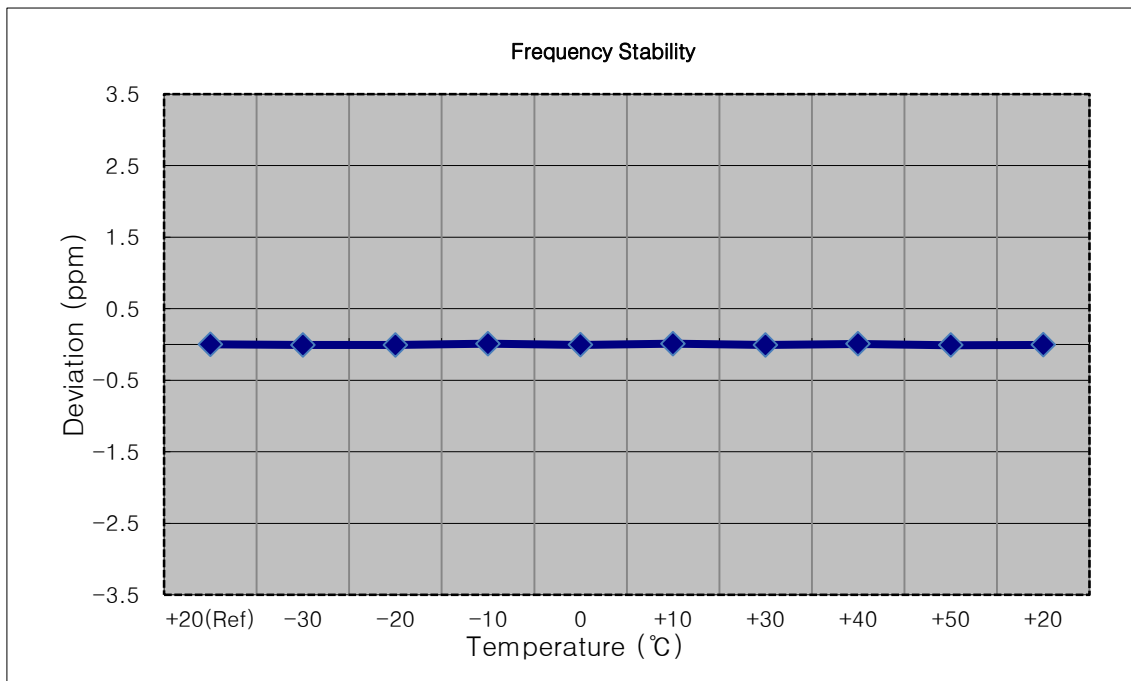


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 707,500,000 Hz
- ▣ CHANNEL: 23095 (5 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	707 499 990	0.0	0.000 000	0.000
100%		-30	707 499 984	-6.3	-0.000 001	-0.009
100%		-20	707 499 998	8.0	0.000 001	0.011
100%		-10	707 499 997	6.2	0.000 001	0.009
100%		0	707 499 981	-9.7	-0.000 001	-0.014
100%		+10	707 499 986	-4.9	-0.000 001	-0.007
100%		+30	707 499 983	-7.9	-0.000 001	-0.011
100%		+40	707 499 986	-4.1	-0.000 001	-0.006
100%		+50	707 499 987	-3.8	-0.000 001	-0.005
Batt. Endpoint	7.300	+20	707 499 995	4.1	0.000 001	0.006

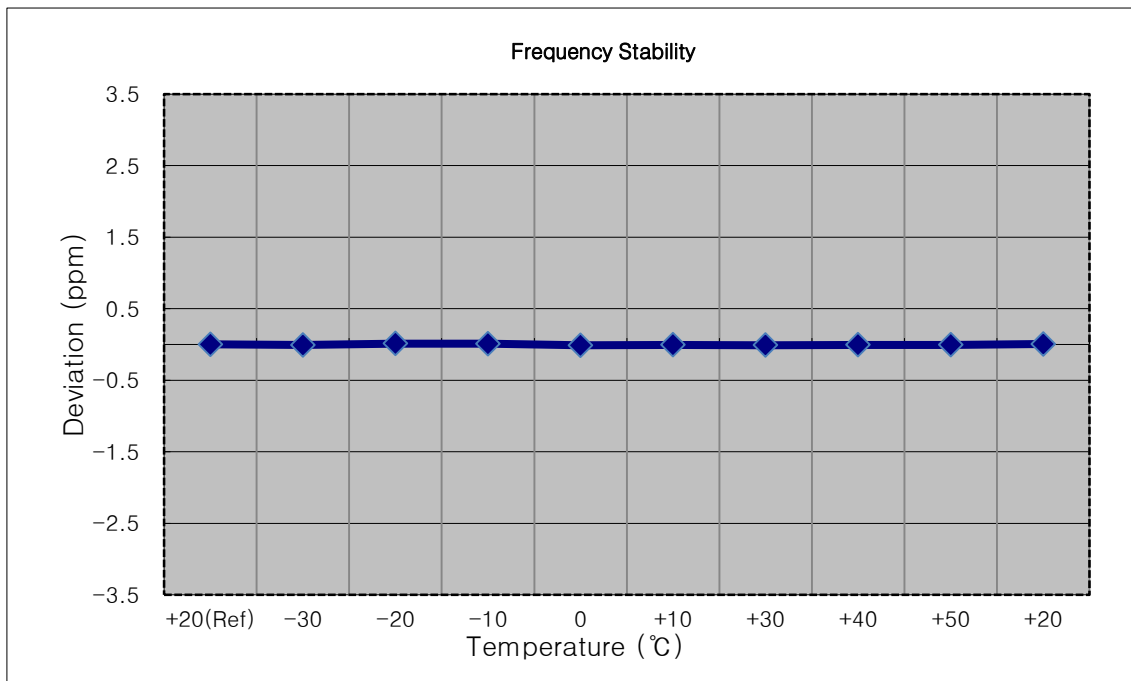


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 707,500,000 Hz
- ▣ CHANNEL: 23095 (10 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	707 500 007	0.0	0.000 000	0.000
100%		-30	707 499 995	-11.8	-0.000 002	-0.017
100%		-20	707 499 997	-9.9	-0.000 001	-0.014
100%		-10	707 499 999	-7.7	-0.000 001	-0.011
100%		0	707 499 994	-13.3	-0.000 002	-0.019
100%		+10	707 500 016	8.7	0.000 001	0.012
100%		+30	707 499 996	-11.2	-0.000 002	-0.016
100%		+40	707 500 013	5.9	0.000 001	0.008
100%		+50	707 499 994	-13.0	-0.000 002	-0.018
Batt. Endpoint	7.300	+20	707 500 016	8.9	0.000 001	0.013

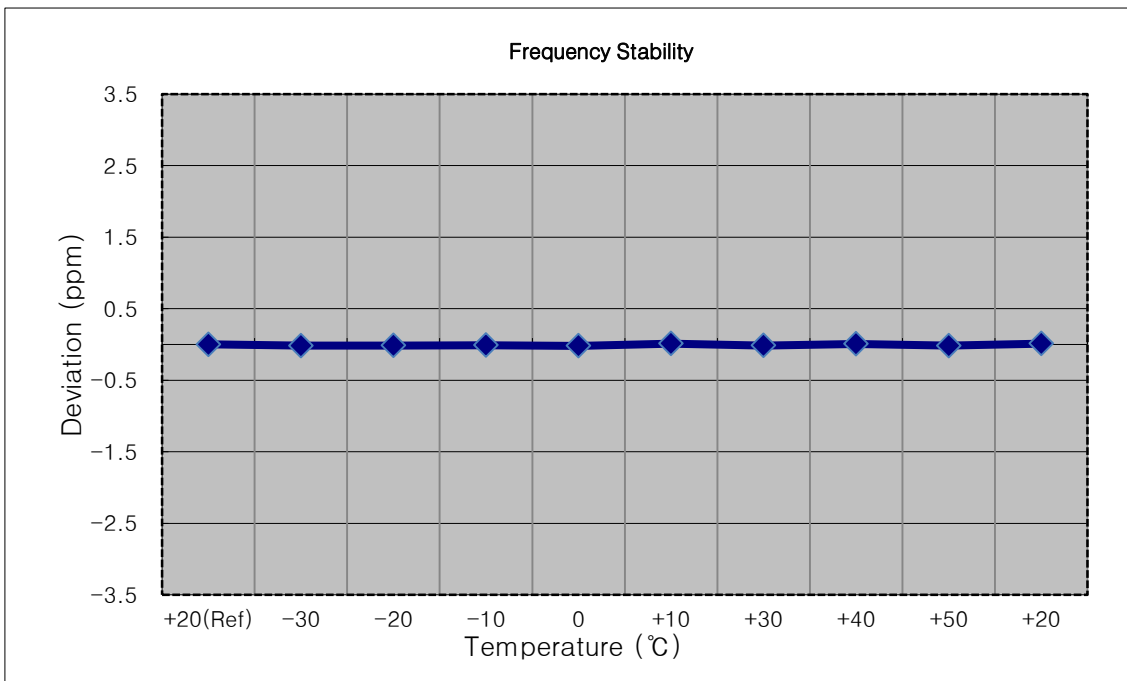


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 715,300,000 Hz
- ▣ CHANNEL: 23173 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	715 299 994	0.0	0.000 000	0.000
100%		-30	715 299 985	-9.0	-0.000 001	-0.013
100%		-20	715 299 988	-6.6	-0.000 001	-0.009
100%		-10	715 299 990	-4.7	-0.000 001	-0.007
100%		0	715 299 985	-9.9	-0.000 001	-0.014
100%		+10	715 300 000	5.7	0.000 001	0.008
100%		+30	715 300 000	5.7	0.000 001	0.008
100%		+40	715 299 989	-5.5	-0.000 001	-0.008
100%		+50	715 300 003	8.9	0.000 001	0.012
Batt. Endpoint	7.300	+20	715 299 989	-5.6	-0.000 001	-0.008

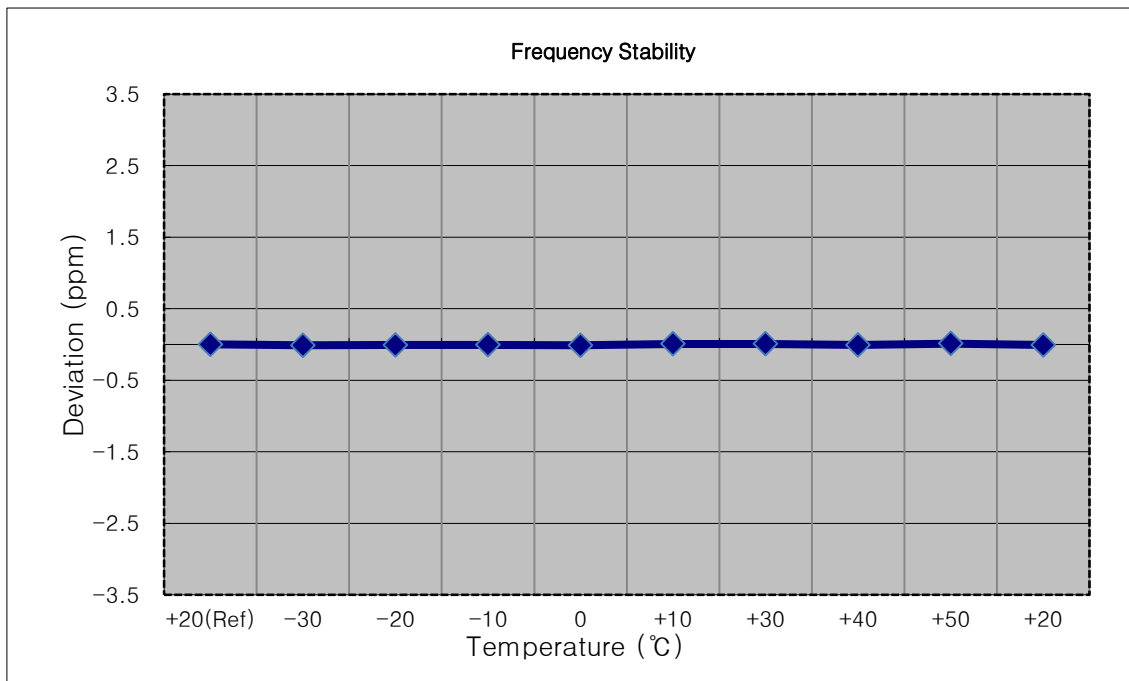


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 714,500,000 Hz
- ▣ CHANNEL: 23165 (3 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	714 499 986	0.0	0.000 000	0.000
100%		-30	714 499 999	13.5	0.000 002	0.019
100%		-20	714 499 973	-12.1	-0.000 002	-0.017
100%		-10	714 499 997	11.8	0.000 002	0.017
100%		0	714 499 995	9.5	0.000 001	0.013
100%		+10	714 499 995	9.0	0.000 001	0.013
100%		+30	714 499 973	-12.9	-0.000 002	-0.018
100%		+40	714 499 975	-10.7	-0.000 001	-0.015
100%		+50	714 499 975	-10.6	-0.000 001	-0.015
Batt. Endpoint	7.300	+20	714 499 994	8.3	0.000 001	0.012

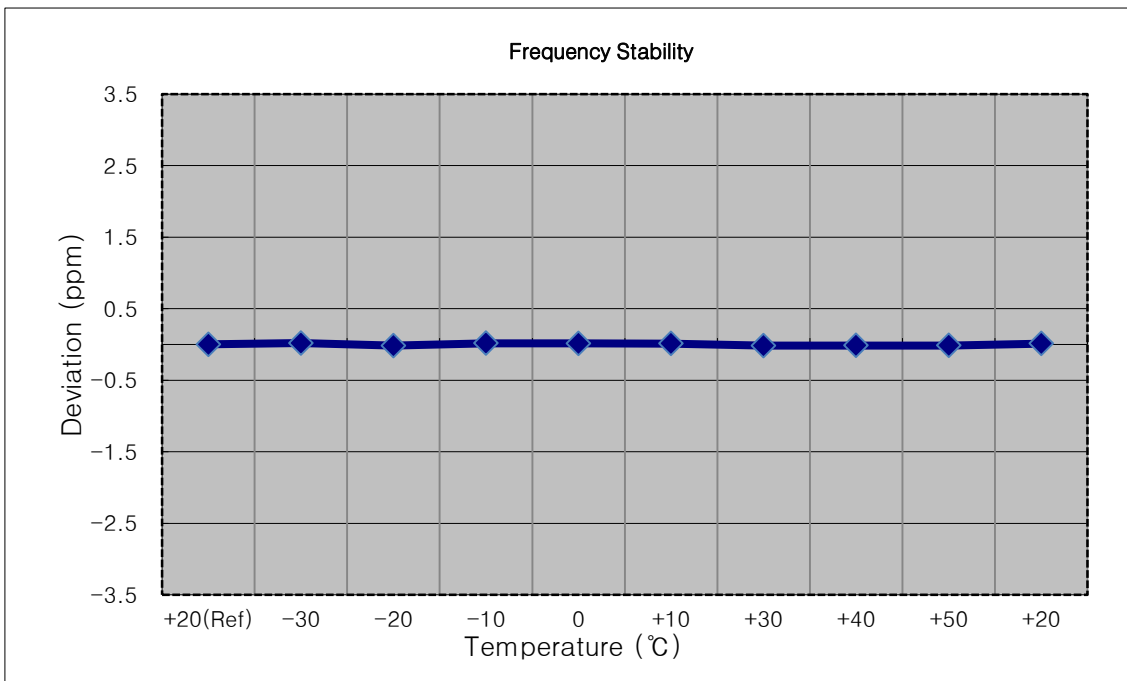


- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 713,500,000 Hz
- ▣ CHANNEL: 23155 (5 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	713 499 990	0.0	0.000 000	0.000
100%		-30	713 500 004	13.4	0.000 002	0.019
100%		-20	713 499 984	-6.2	-0.000 001	-0.009
100%		-10	713 499 999	8.8	0.000 001	0.012
100%		0	713 499 981	-9.0	-0.000 001	-0.013
100%		+10	713 500 003	13.0	0.000 002	0.018
100%		+30	713 500 001	10.3	0.000 001	0.014
100%		+40	713 500 001	11.2	0.000 002	0.016
100%		+50	713 499 980	-10.1	-0.000 001	-0.014
Batt. Endpoint	7.300	+20	713 499 981	-9.1	-0.000 001	-0.013

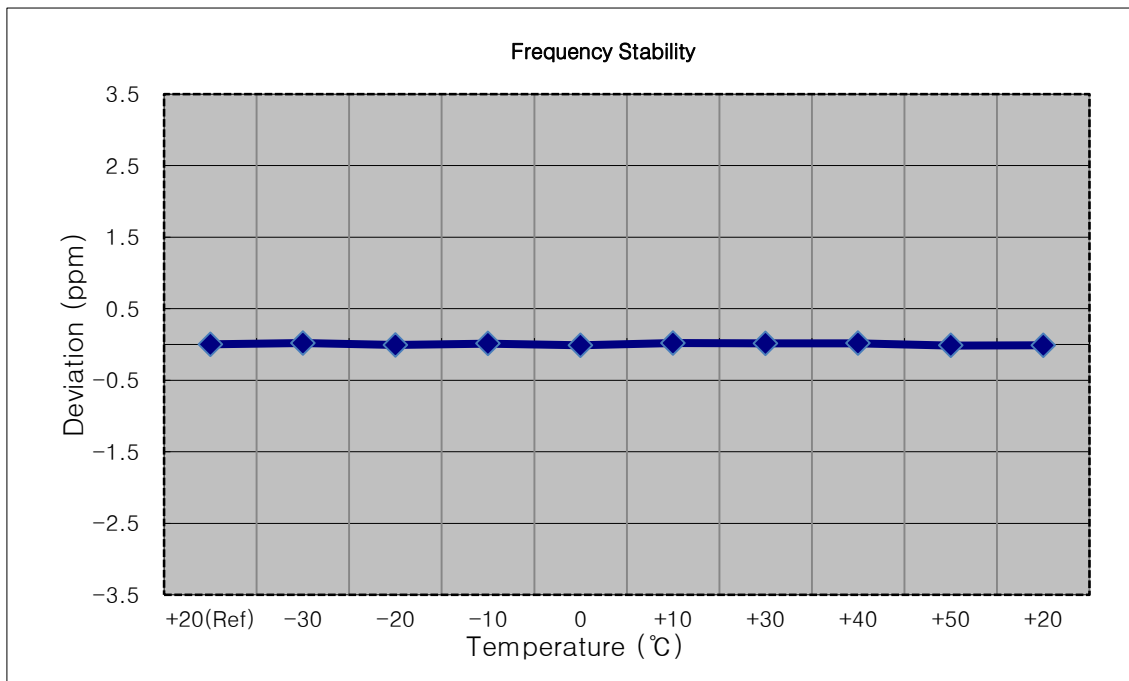

- ▣ MODE: LTE B12
- ▣ OPERATING FREQUENCY: 711,000,000 Hz
- ▣ CHANNEL: 23130 (10 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	711 000 017	0.0	0.000 000	0.000
100%		-30	710 999 999	-18.0	-0.000 003	-0.025
100%		-20	711 000 022	5.5	0.000 001	0.008
100%		-10	711 000 033	16.0	0.000 002	0.023
100%		0	711 000 000	-17.2	-0.000 002	-0.024
100%		+10	711 000 033	16.2	0.000 002	0.023
100%		+30	711 000 005	-12.2	-0.000 002	-0.017
100%		+40	711 000 029	12.0	0.000 002	0.017
100%		+50	711 000 000	-16.8	-0.000 002	-0.024
Batt. Endpoint	7.300	+20	711 000 005	-11.5	-0.000 002	-0.016

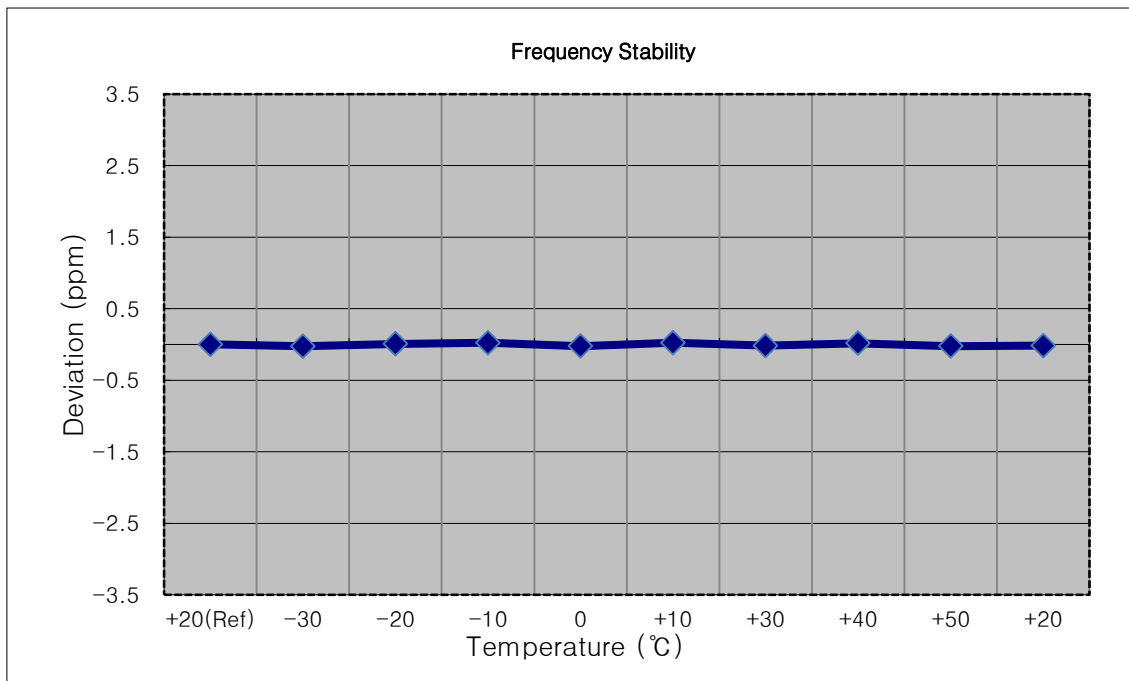

8.7 RECEIVER SPURIOUS EMISSIONS

Frequency Range : 30 MHz ~ 1 GHz

Frequency	Reading	Ant. factor+Cable loss- Amp Gain	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	(H/V)	dB μ V/m	dB μ V/m	dB
No Peak Found						

Frequency Range : Above 1 GHz


Frequency	Reading	Ant. factor+Cable loss- Amp Gain	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	(H/V)	dB μ V/m	dB μ V/m	dB
No Peak Found						

Limit


Frequency (MHz)	Field Strength (μ v/m at 3 meters)
30 – 88	100
88 - 216	150
216 – 960	200
Above 960	500

9. TEST PLOTS


BAND 12. Occupied Bandwidth Plot (1.4M BW Ch.23095 QPSK_RB6_0)

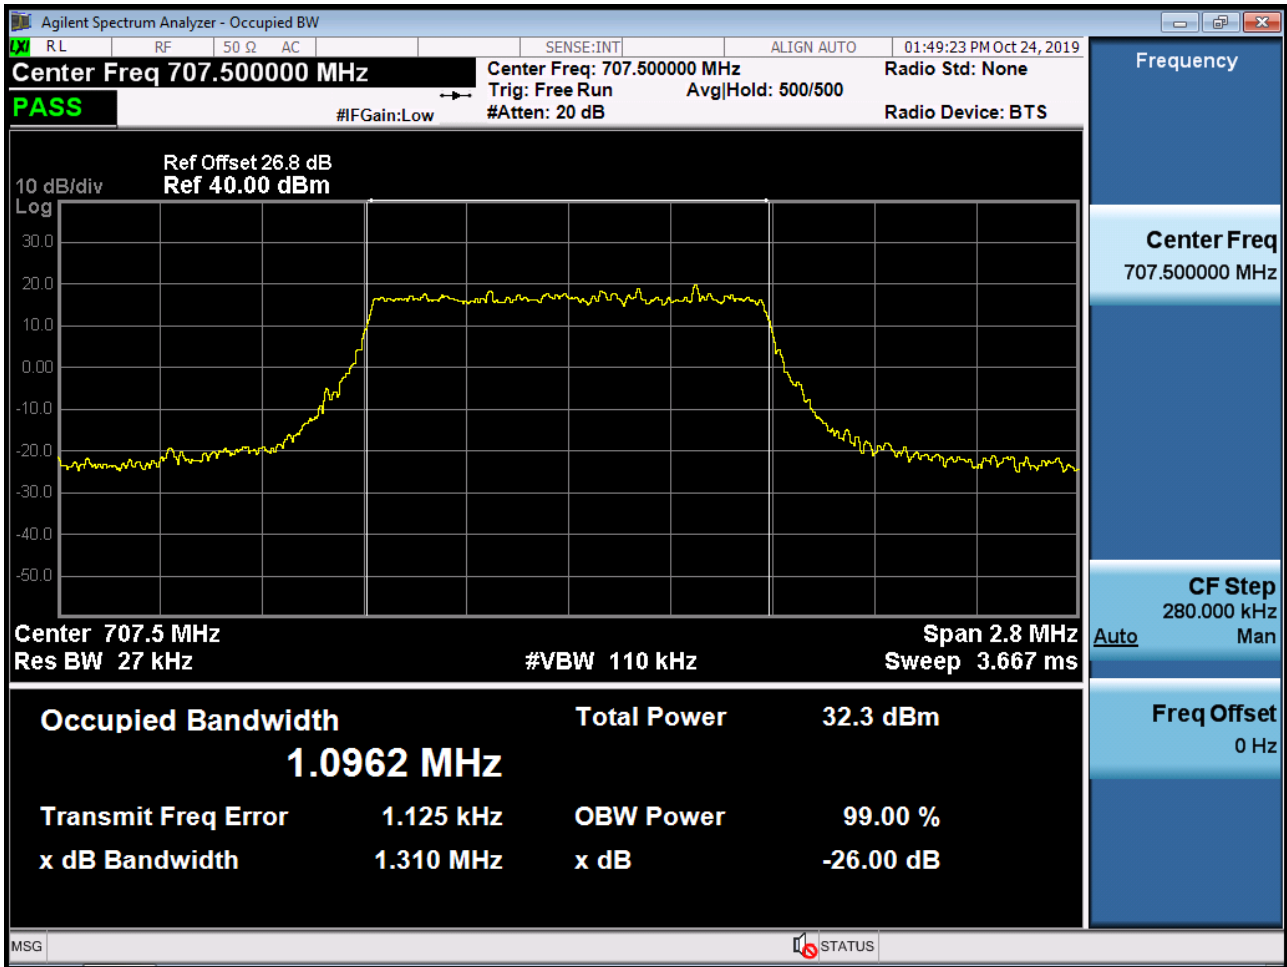


BAND 12. Occupied Bandwidth Plot (1.4M BW Ch.23095 16QAM_RB6_0)

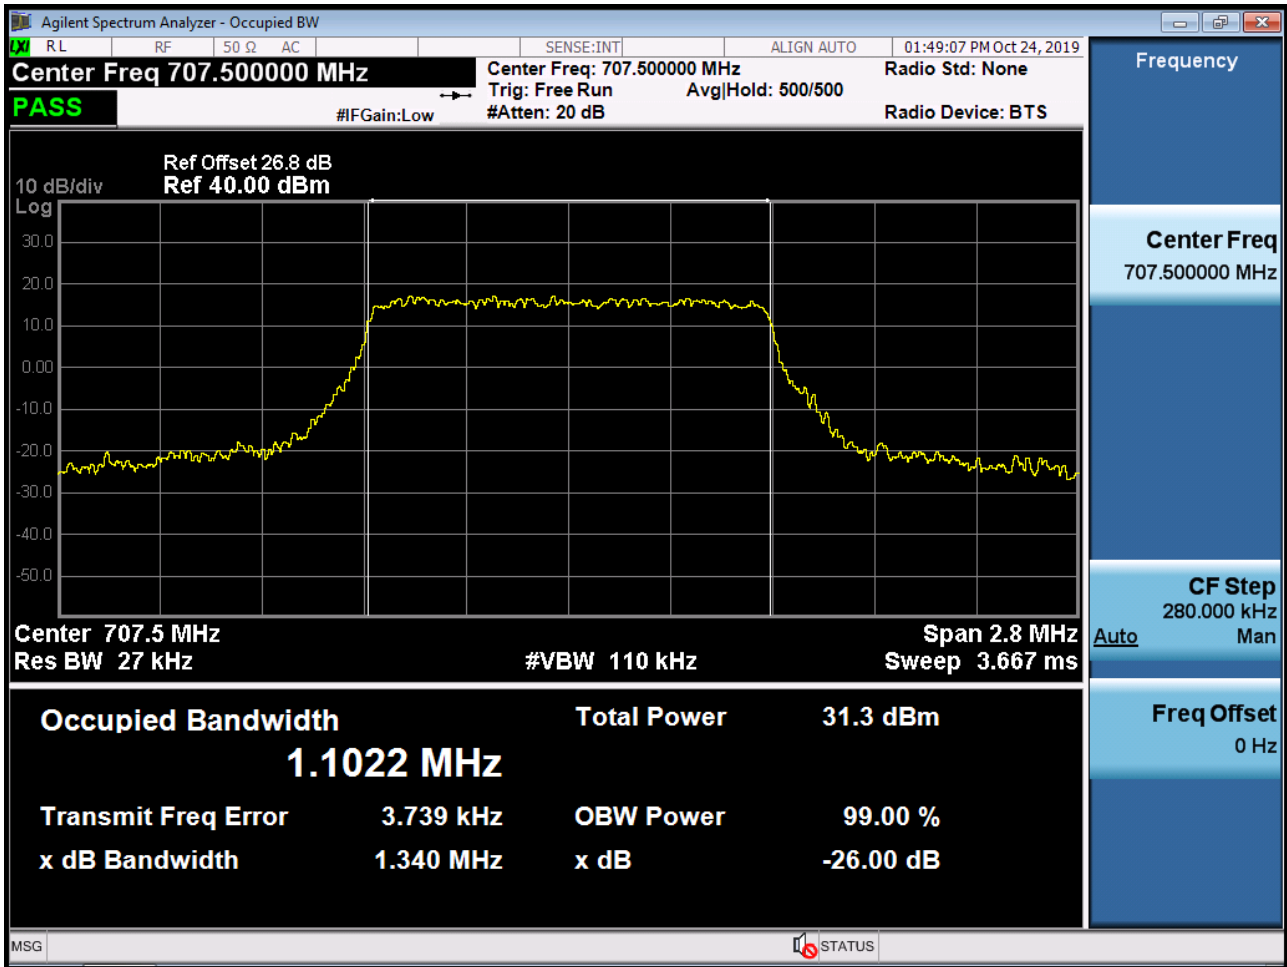


BAND 12. Occupied Bandwidth Plot (1.4M BW Ch.23095 64QAM_RB6_0)

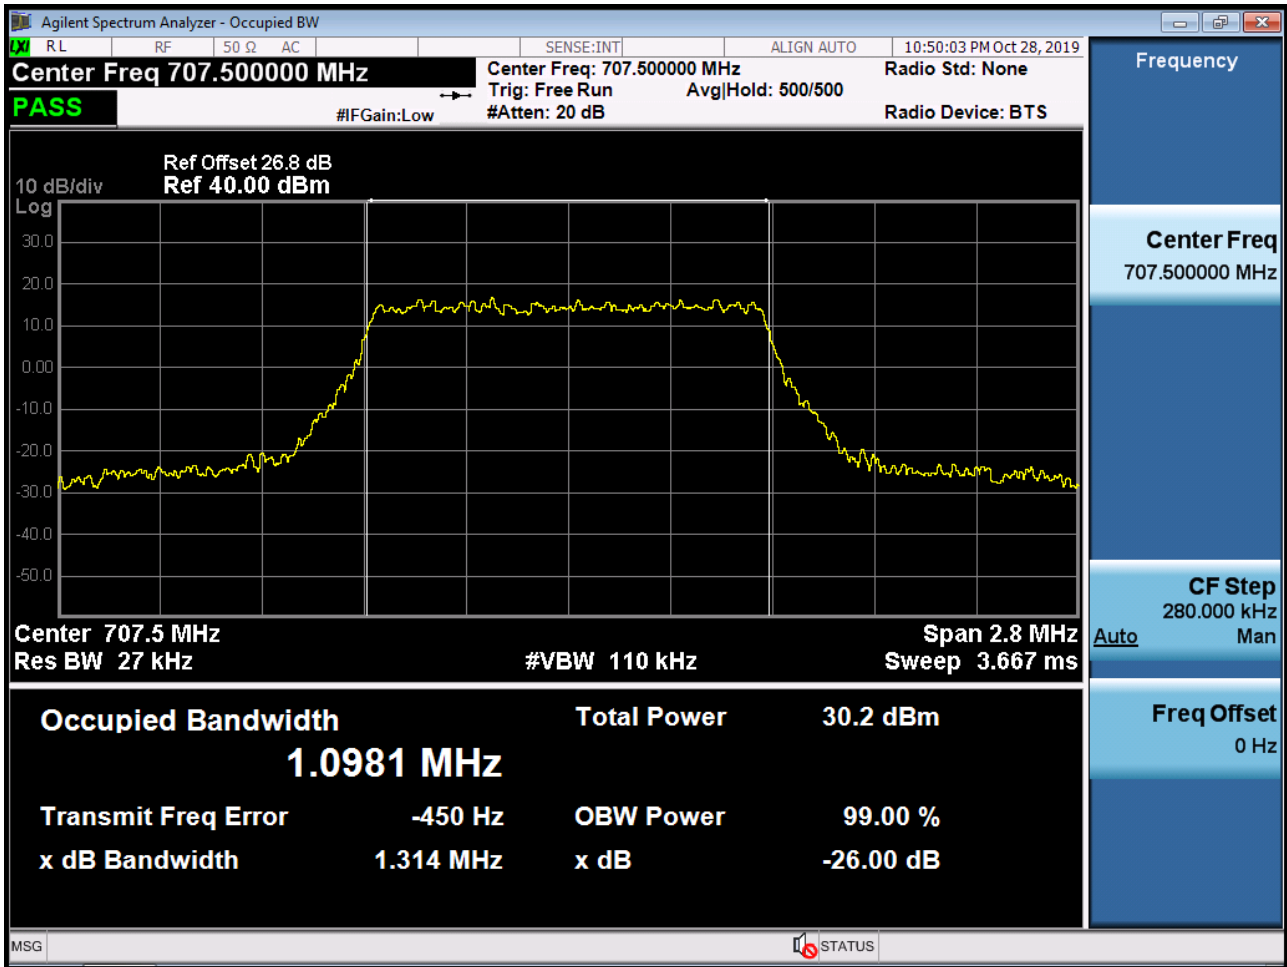


BAND 12. Occupied Bandwidth Plot (3M BW Ch.23095 QPSK_RB15_0)

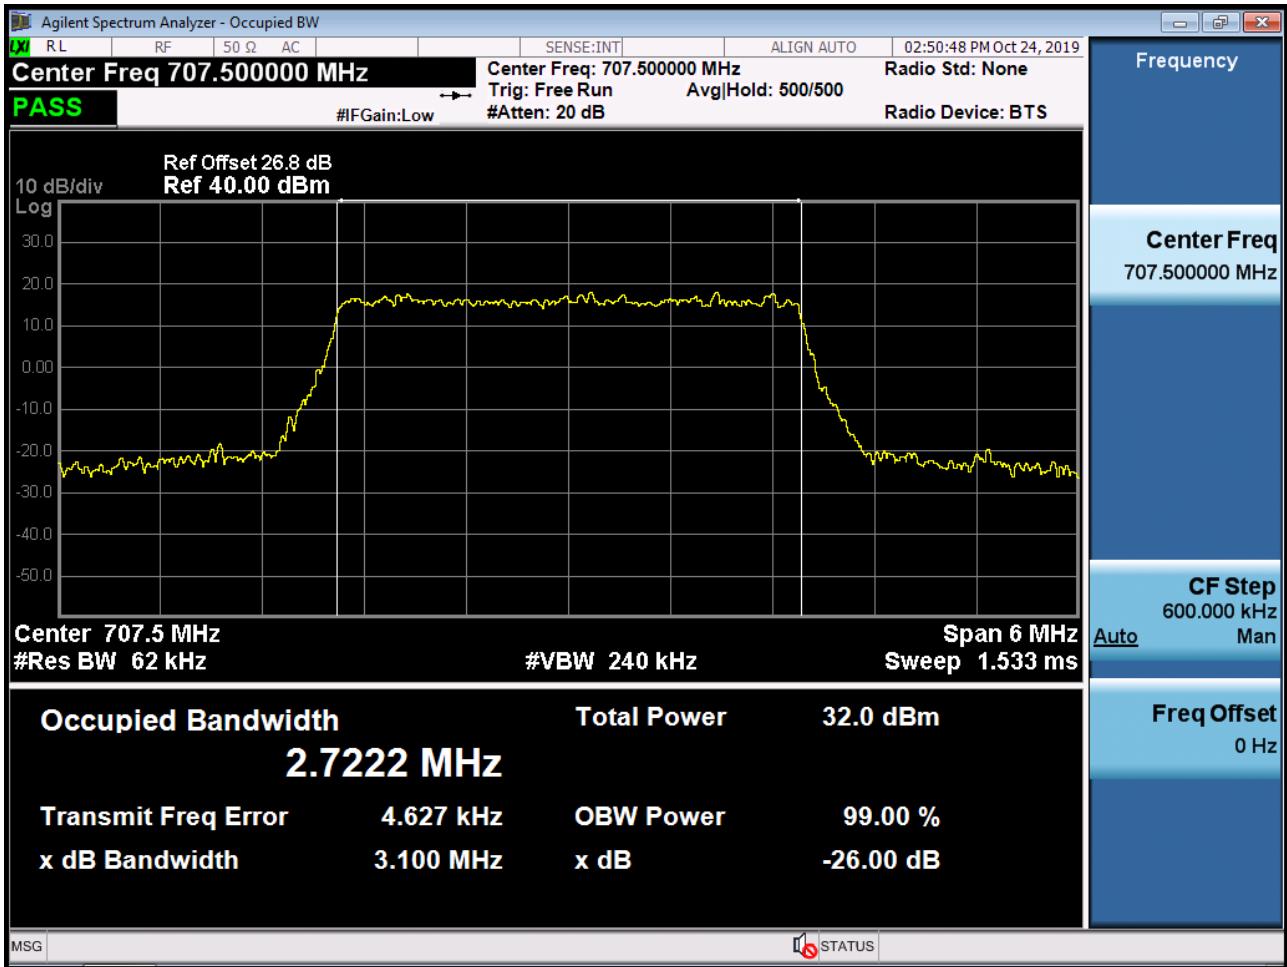


BAND 12. Occupied Bandwidth Plot (3M BW Ch.23095 16QAM_RB15_0)

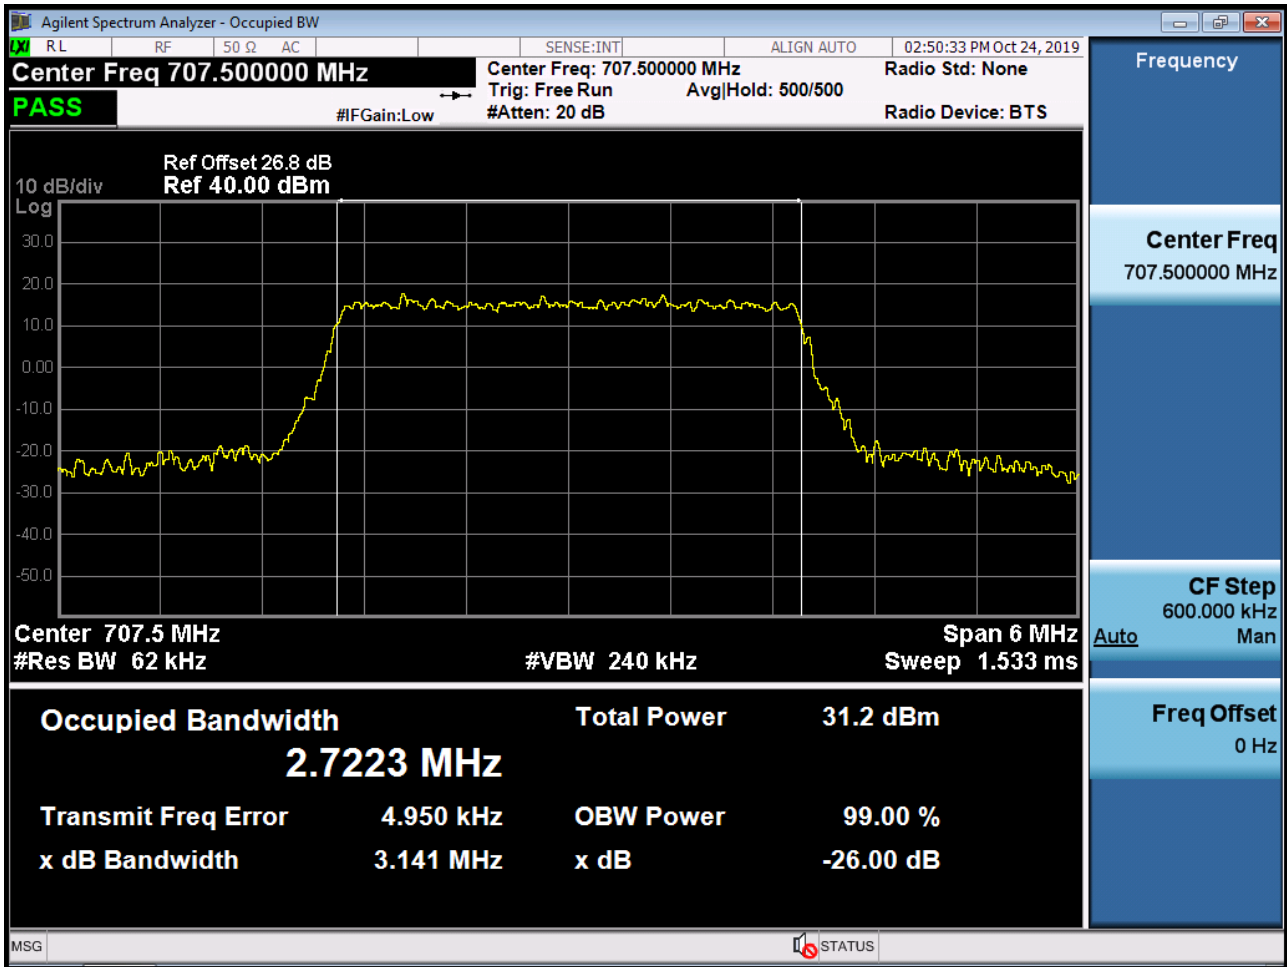


BAND 12. Occupied Bandwidth Plot (3M BW Ch.23095 64QAM_RB15_0)

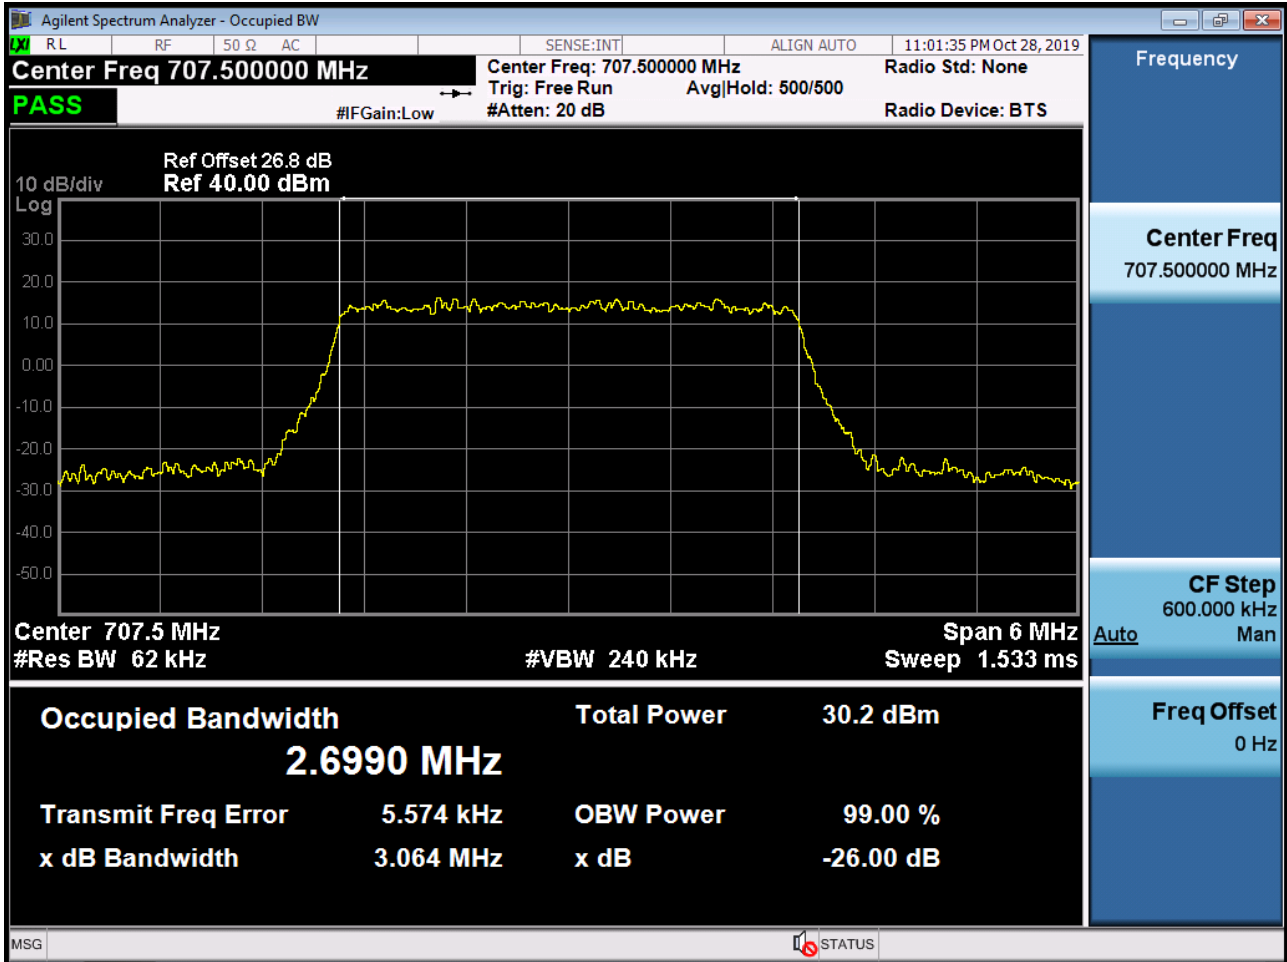


BAND 12. Occupied Bandwidth Plot (5M BW Ch.23095 QPSK_RB25_0)

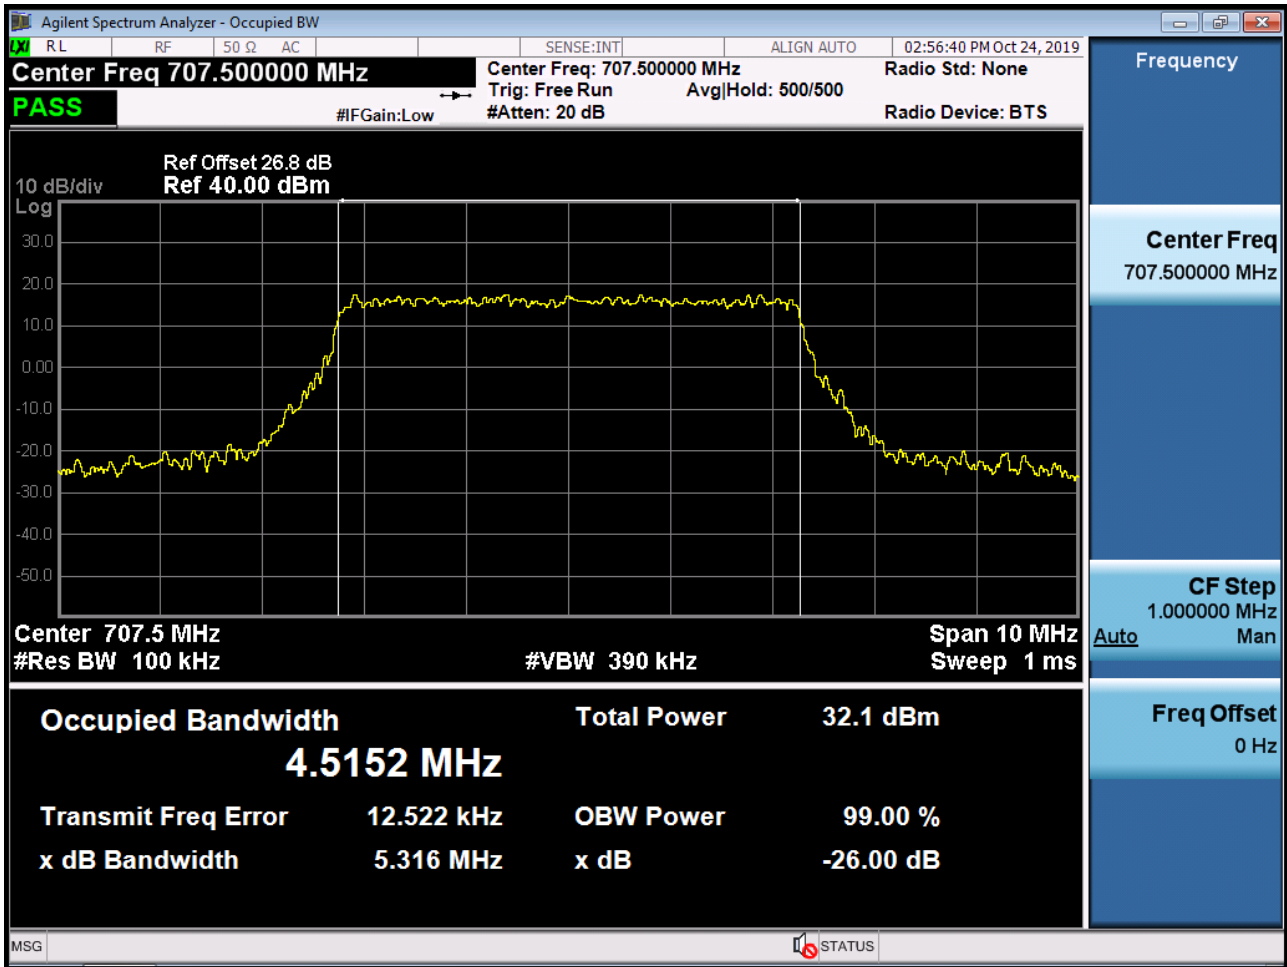


BAND 12. Occupied Bandwidth Plot (5M BW Ch.23095 16QAM_RB25_0)

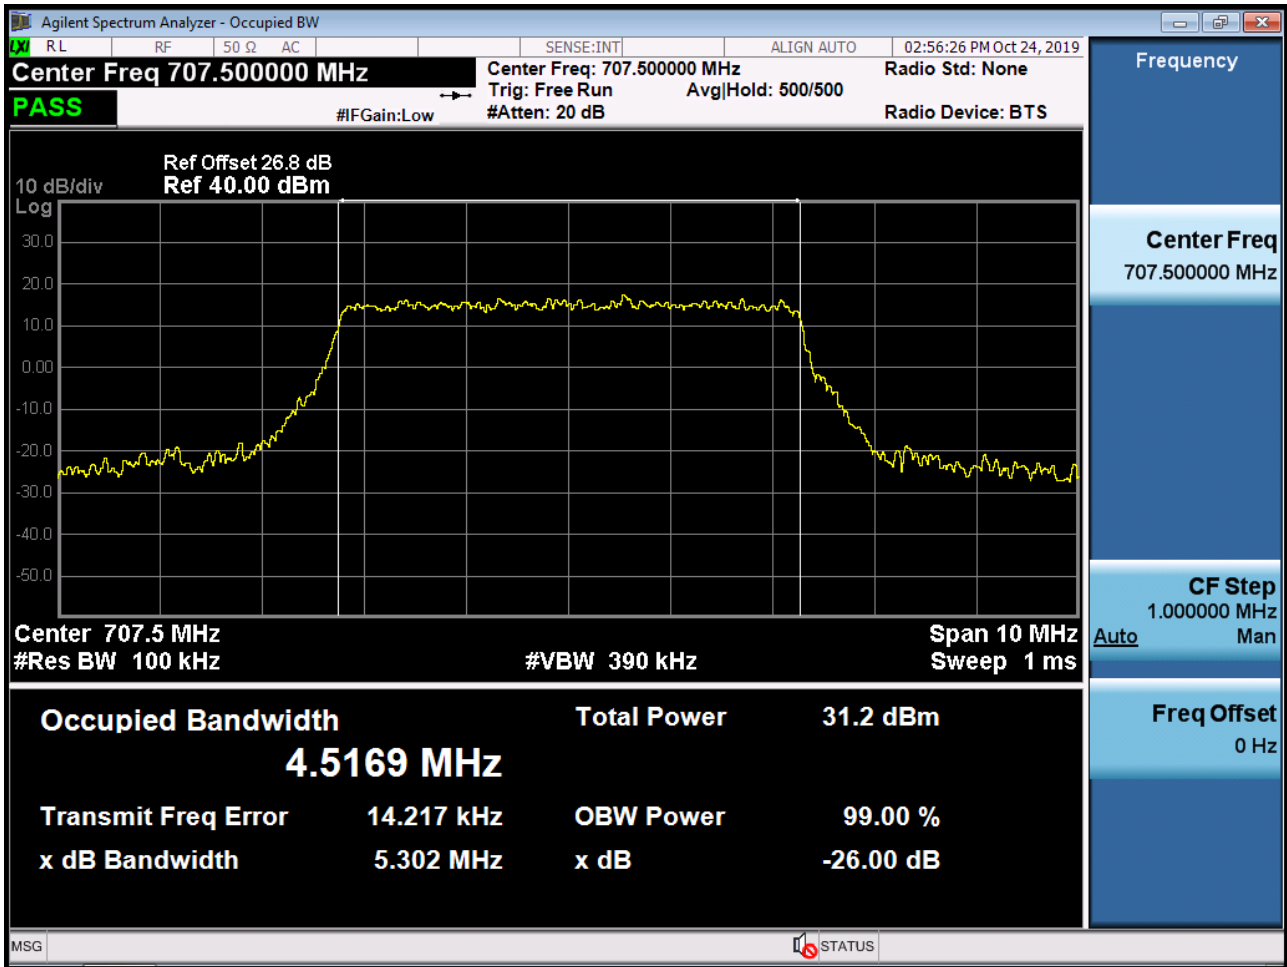


BAND 12. Occupied Bandwidth Plot (5M BW Ch.23095 64QAM_RB25_0)

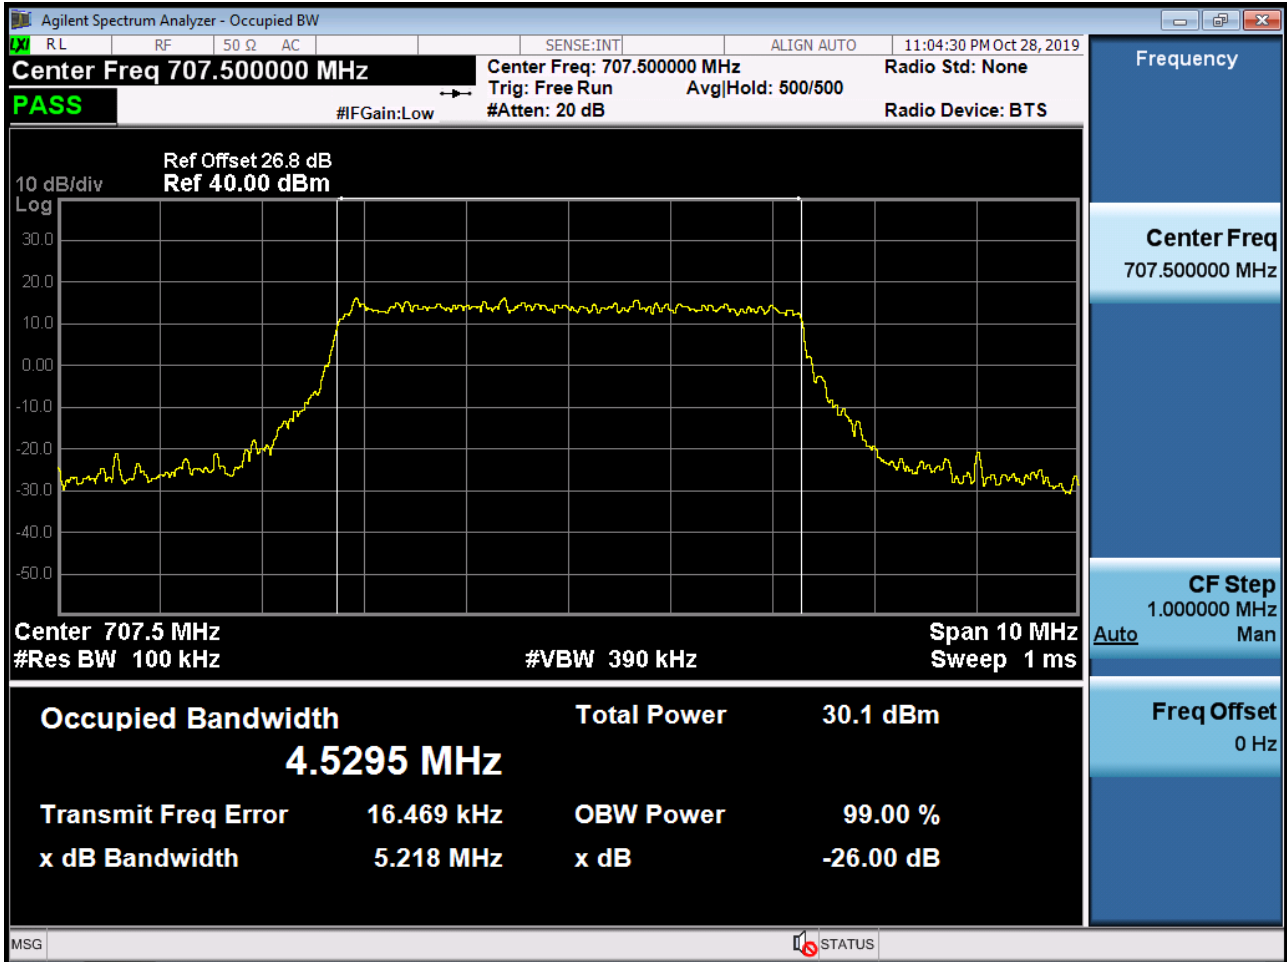


BAND 12. Occupied Bandwidth Plot (10M BW Ch.23095 QPSK_RB50_0)

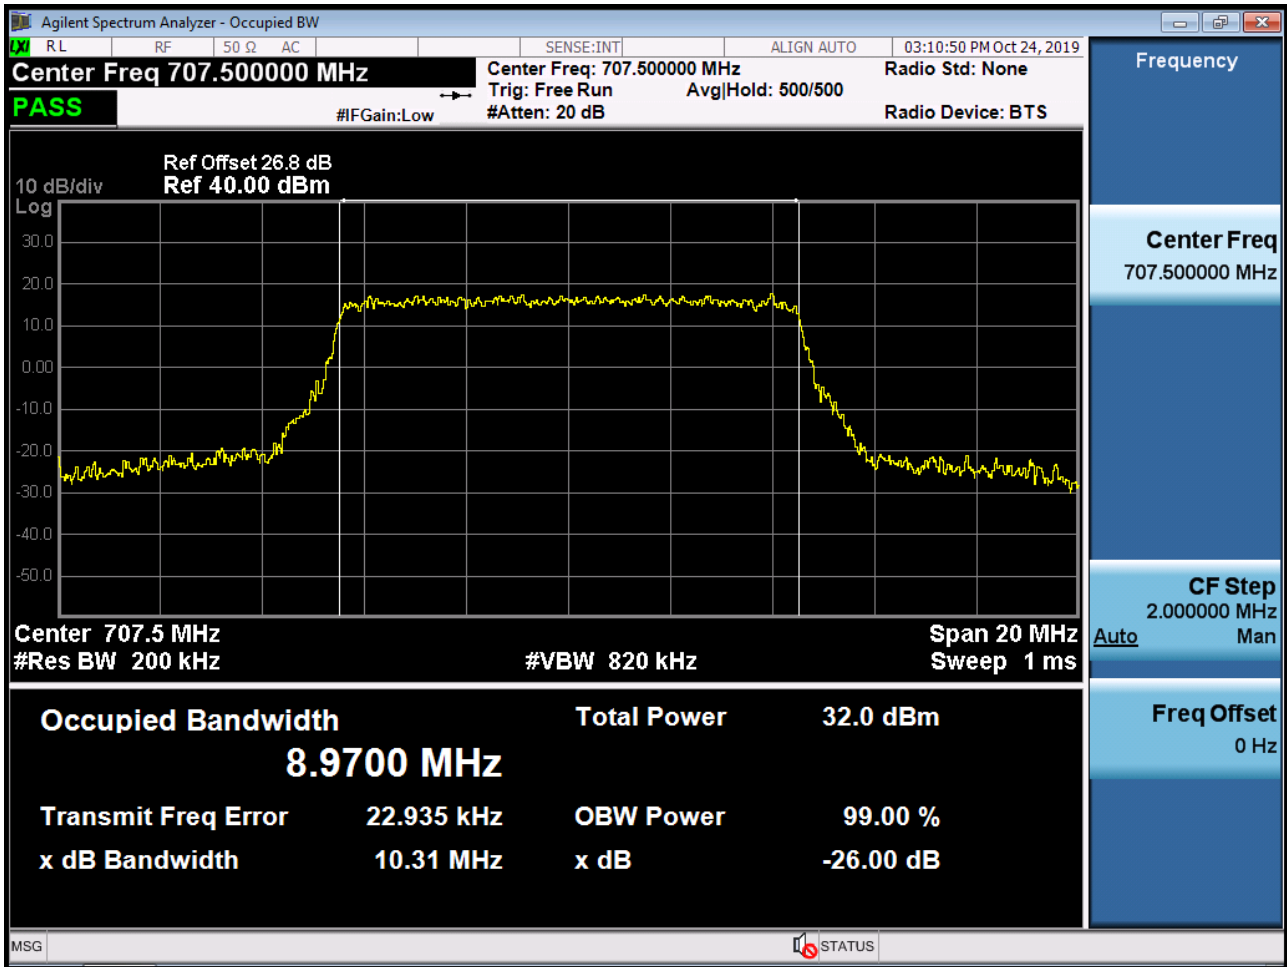


BAND 12. Occupied Bandwidth Plot (10M BW Ch.23095 16QAM_RB50_0)

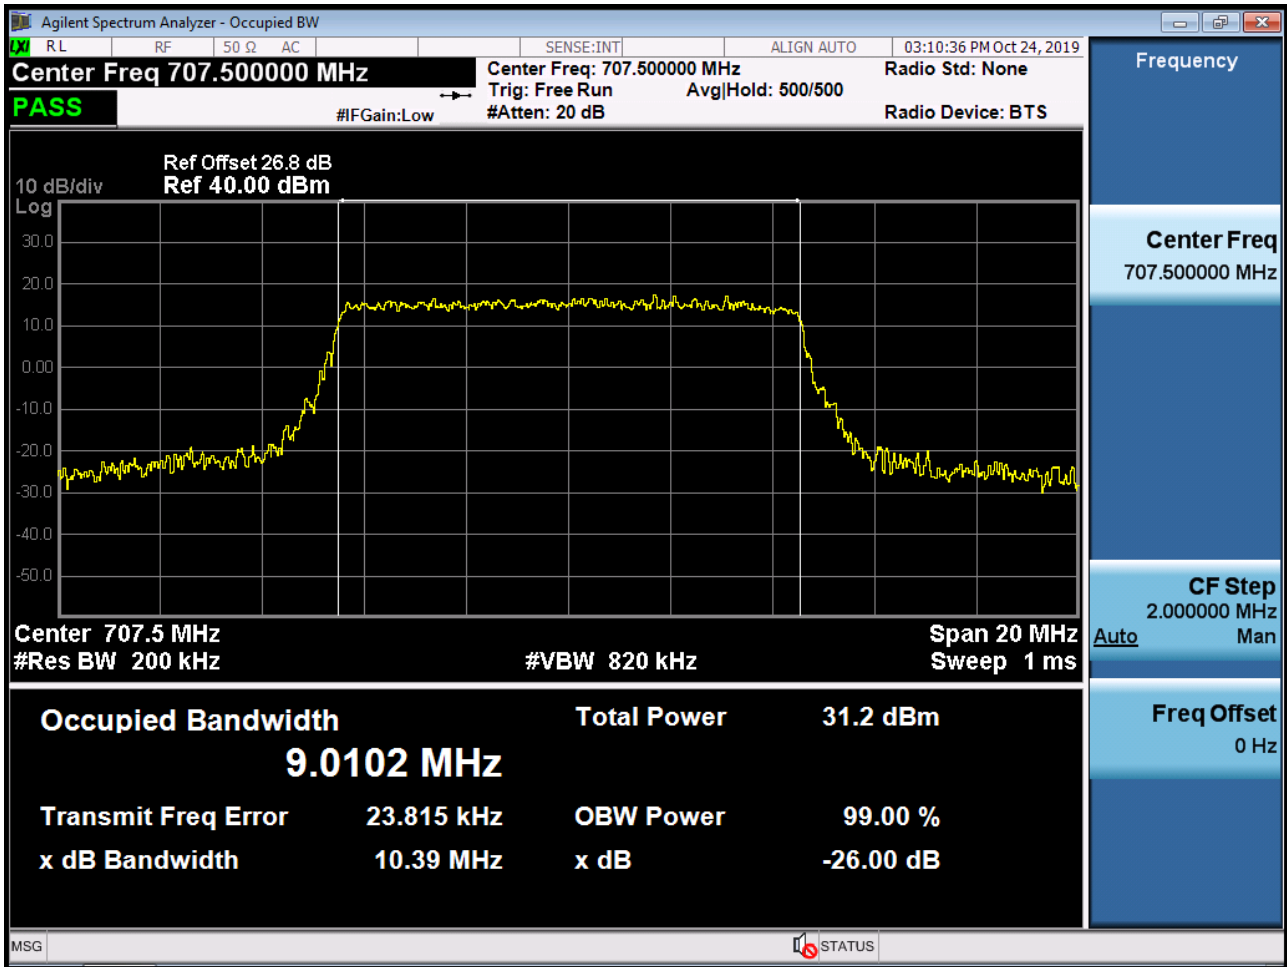

BAND 12. Occupied Bandwidth Plot (10M BW Ch.23095 64QAM_RB50_0)

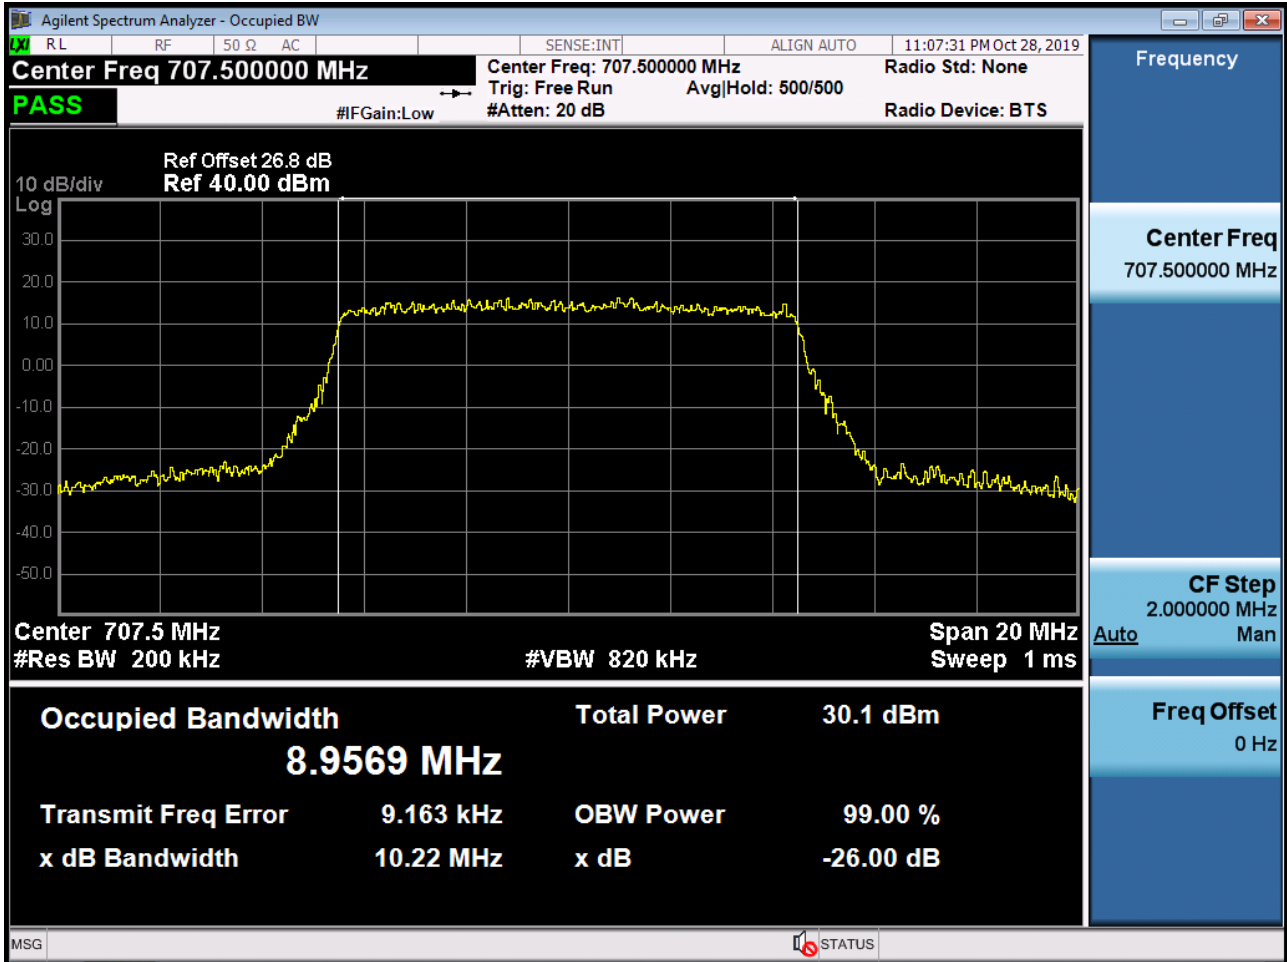

BAND 12. Lower Band Edge Plot (1.4M BW Ch.23017 QPSK_RB1_Offset 0)

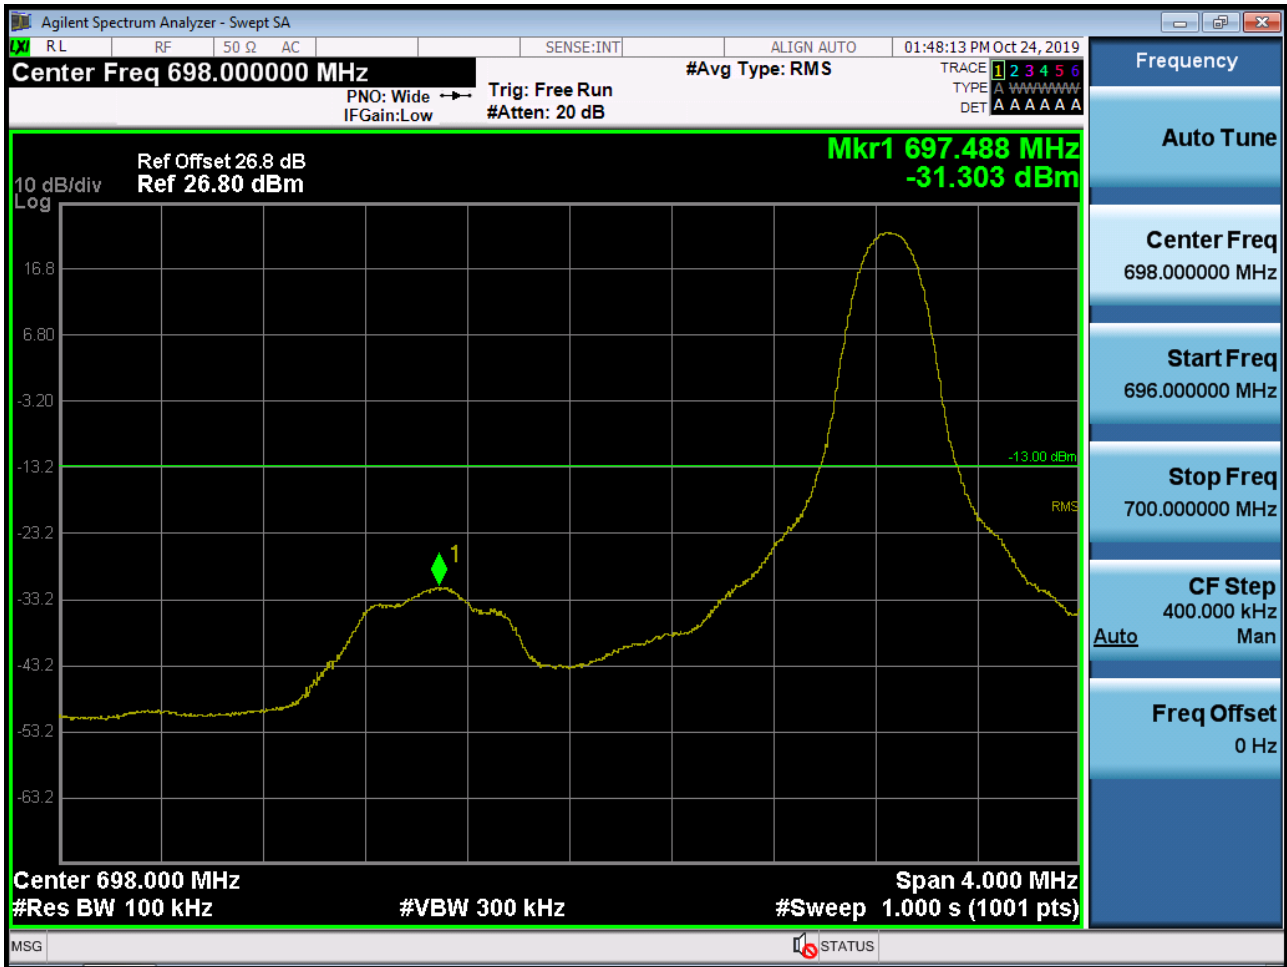


BAND 12. Lower Band Edge Plot (1.4M BW Ch.23017 QPSK_RB6_Offset 0)



BAND 12. Lower Extended Band Edge Plot (1.4M BW Ch.23017 QPSK_RB6_0)



BAND 12. Lower Band Edge Plot (3M BW Ch.23025 QPSK_RB1_Offset 0)

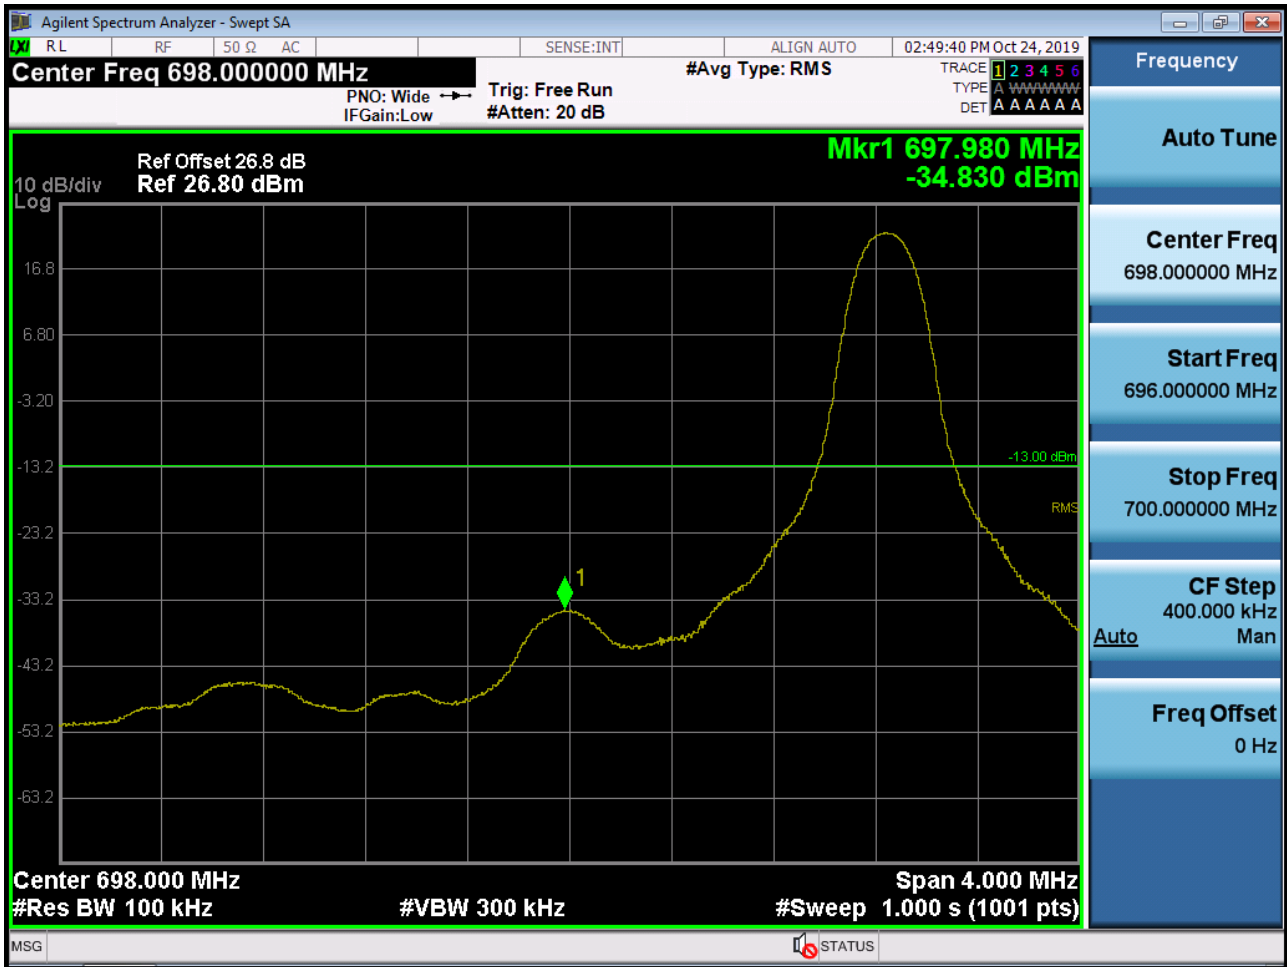

BAND 12. Lower Band Edge Plot (3M BW Ch.23025 QPSK_RB15_Offset 0)




BAND 12. Lower Extended Band Edge Plot (3M BW Ch.23025 QPSK_RB15_0)



BAND 12. Lower Band Edge Plot (5M BW Ch.23035 QPSK_RB1_Offset 0)



BAND 12. Lower Band Edge Plot (5M BW Ch.23035 QPSK_RB25_Offset 0)

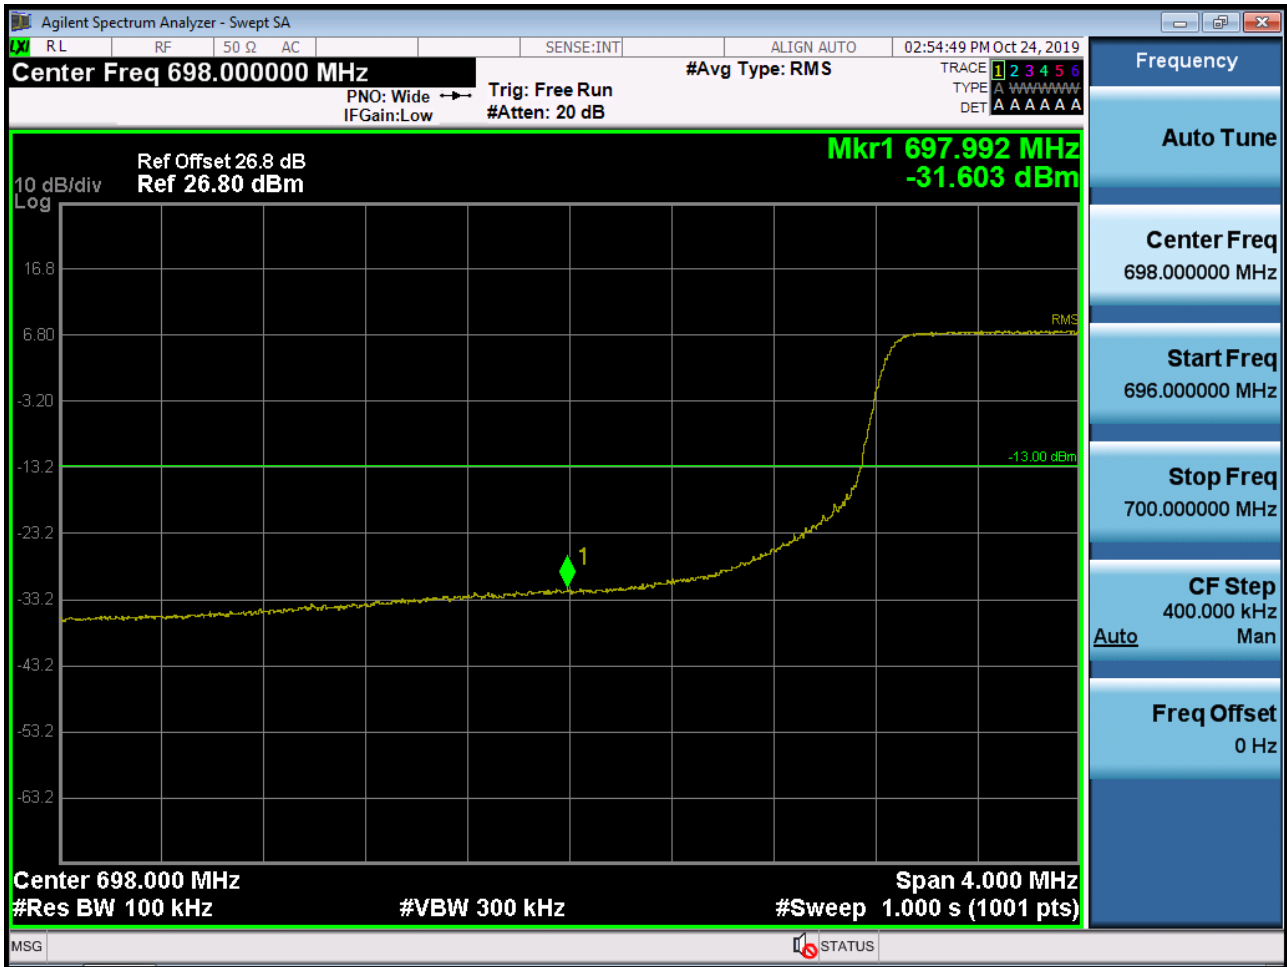


BAND 12. Lower Extended Band Edge Plot (5M BW Ch.23035 QPSK_RB25_0)



BAND 12. Lower Band Edge Plot (10M BW Ch.23060 QPSK_RB1_Offset 0)



BAND 12. Lower Band Edge Plot (10M BW Ch.23060 QPSK_RB50_Offset 0)

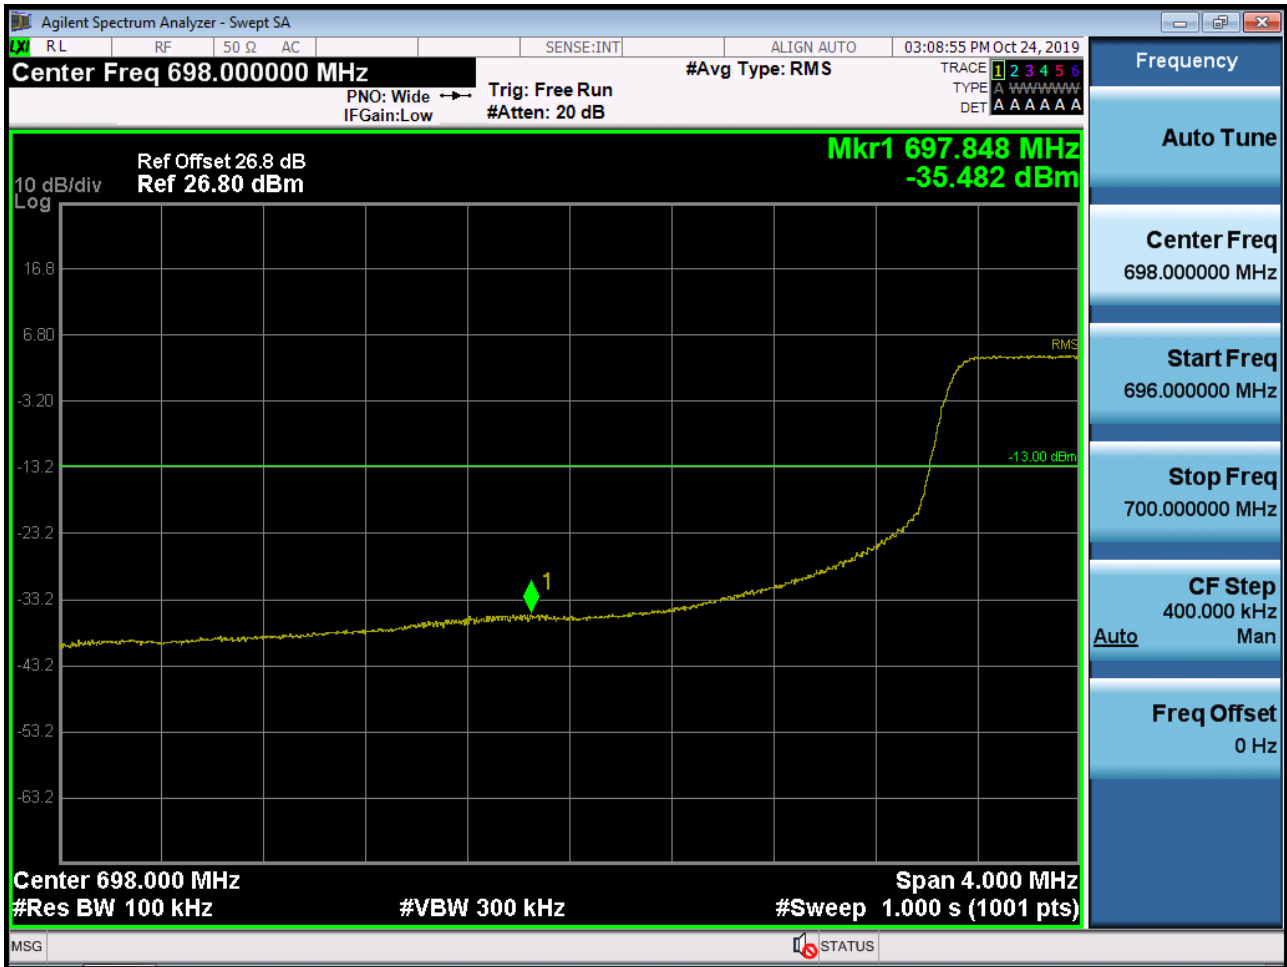

BAND 12. Lower Extended Band Edge Plot (10M BW Ch.23060 QPSK_RB50_0)



BAND 12. Upper Band Edge Plot (1.4M BW Ch.23173 QPSK_RB1_Offset 5)_1



BAND 12. Upper Band Edge Plot (1.4M BW Ch.23173 QPSK_RB1_Offset 5)_2



BAND 12. Upper Band Edge Plot (1.4M BW Ch.23173 QPSK_RB6_Offset 0)



BAND 12. Upper Extended Band Edge Plot (1.4M BW Ch.23173 QPSK_RB6_0)




BAND 12. Upper Band Edge Plot (3M BW Ch.23165 QPSK_RB1_Offset 14)-1



BAND 12. Upper Band Edge Plot (3M BW Ch.23165 QPSK_RB1_Offset 14)-2



BAND 12. Upper Band Edge Plot (3M BW Ch.23165 QPSK_RB15_Offset 0)

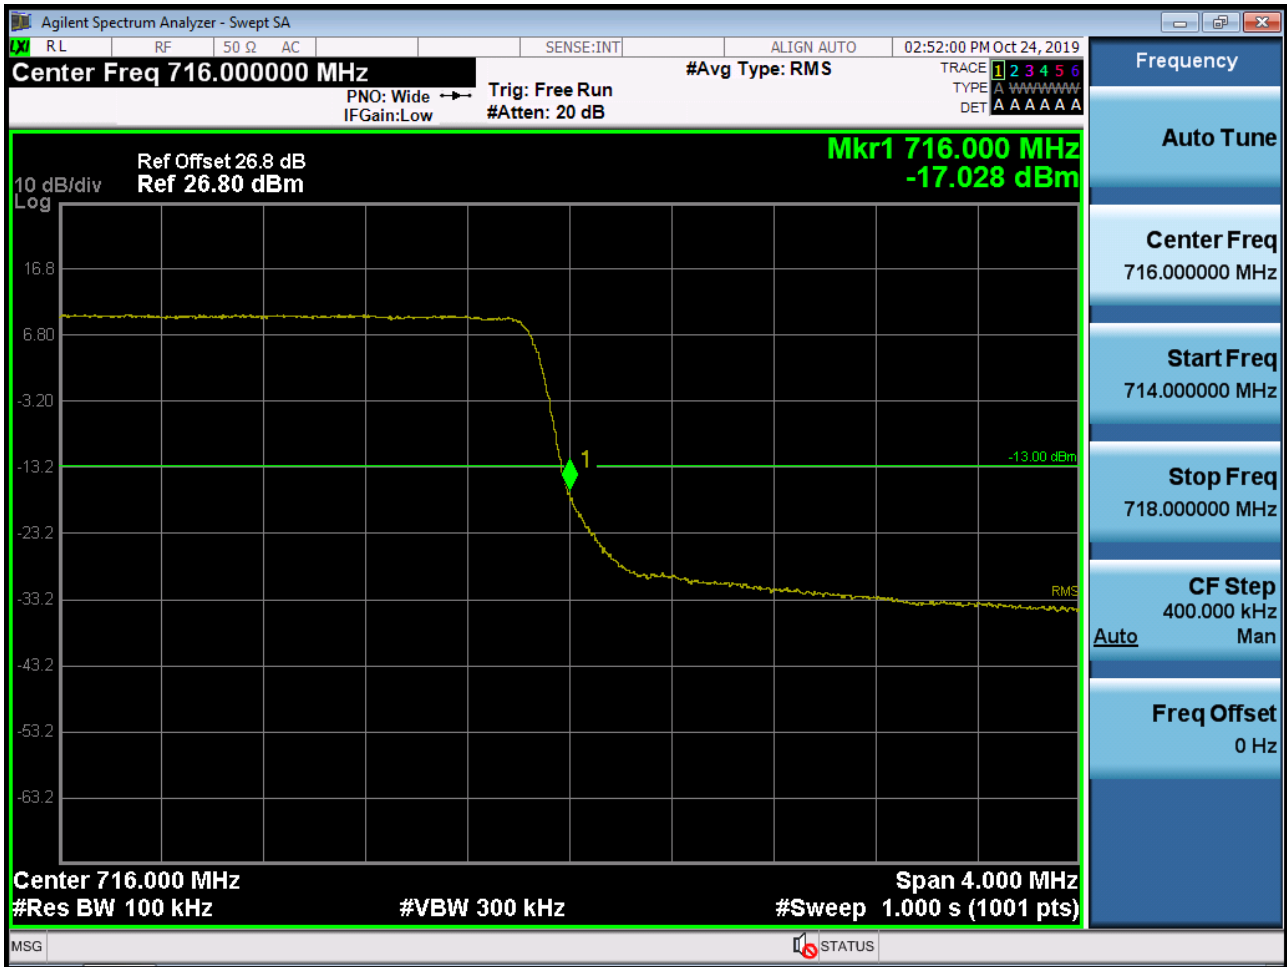

BAND 12. Upper Extended Band Edge Plot (3M BW Ch.23165 QPSK_RB15_0)



BAND 12. Upper Band Edge Plot (5M BW Ch.23155 QPSK_RB1_Offset 24)




BAND 12. Upper Band Edge Plot (5M BW Ch.23155 QPSK_RB25_Offset 0)



BAND 12. Upper Extended Band Edge Plot (5M BW Ch.23155 QPSK_RB25_0)



BAND 12. Upper Band Edge Plot (10M BW Ch.23130 QPSK_RB1_Offset 49)

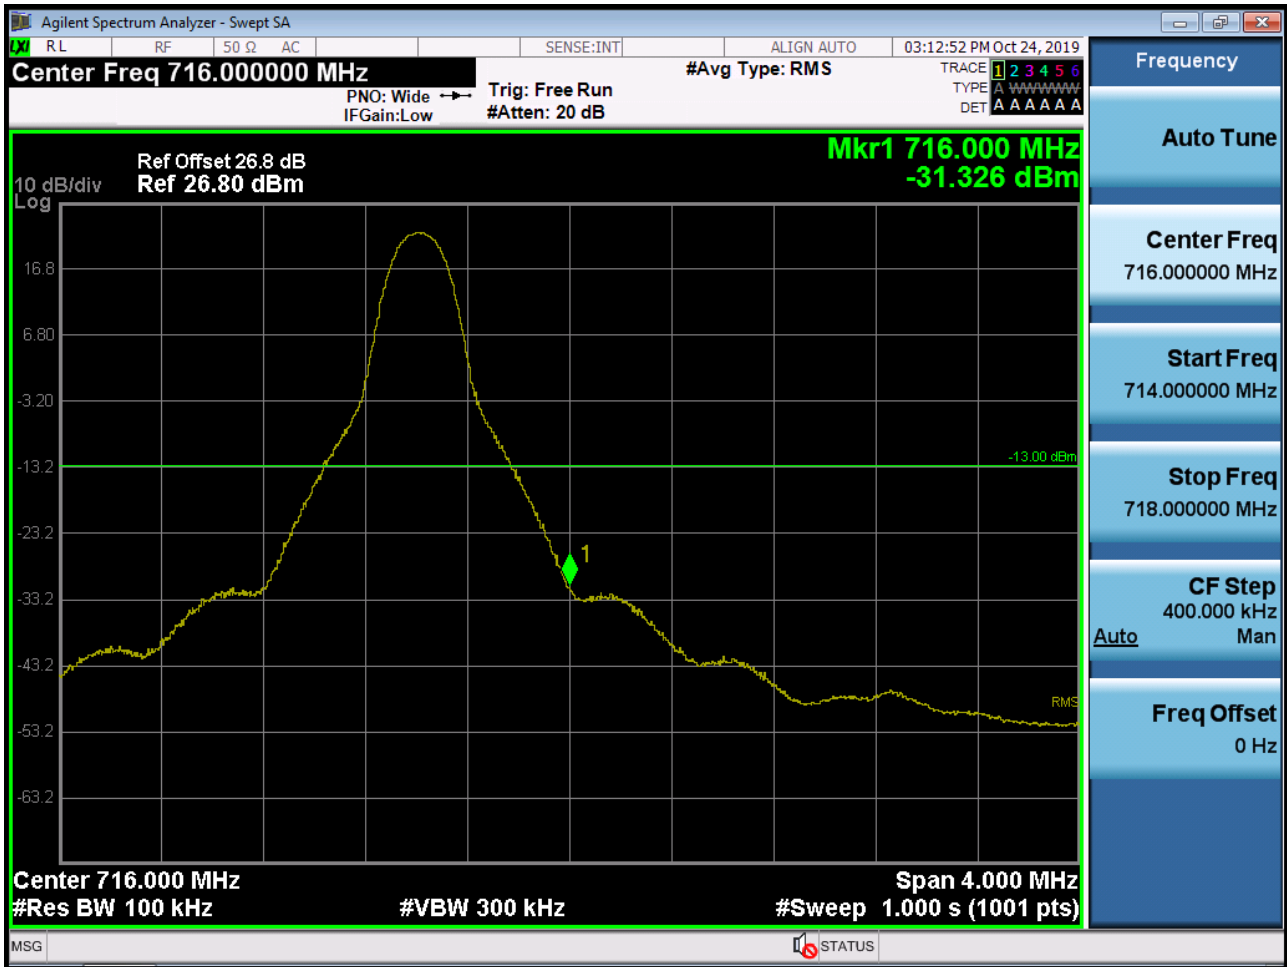


BAND 12. Upper Band Edge Plot (10M BW Ch.23130 QPSK_RB50_Offset 0)




BAND 12. Upper Extended Band Edge Plot (10M BW Ch.23130 QPSK_RB50_0)




BAND 12. Conducted Spurious Plot _ (23017ch_1.4MHz_QPSK_RB 1_0)

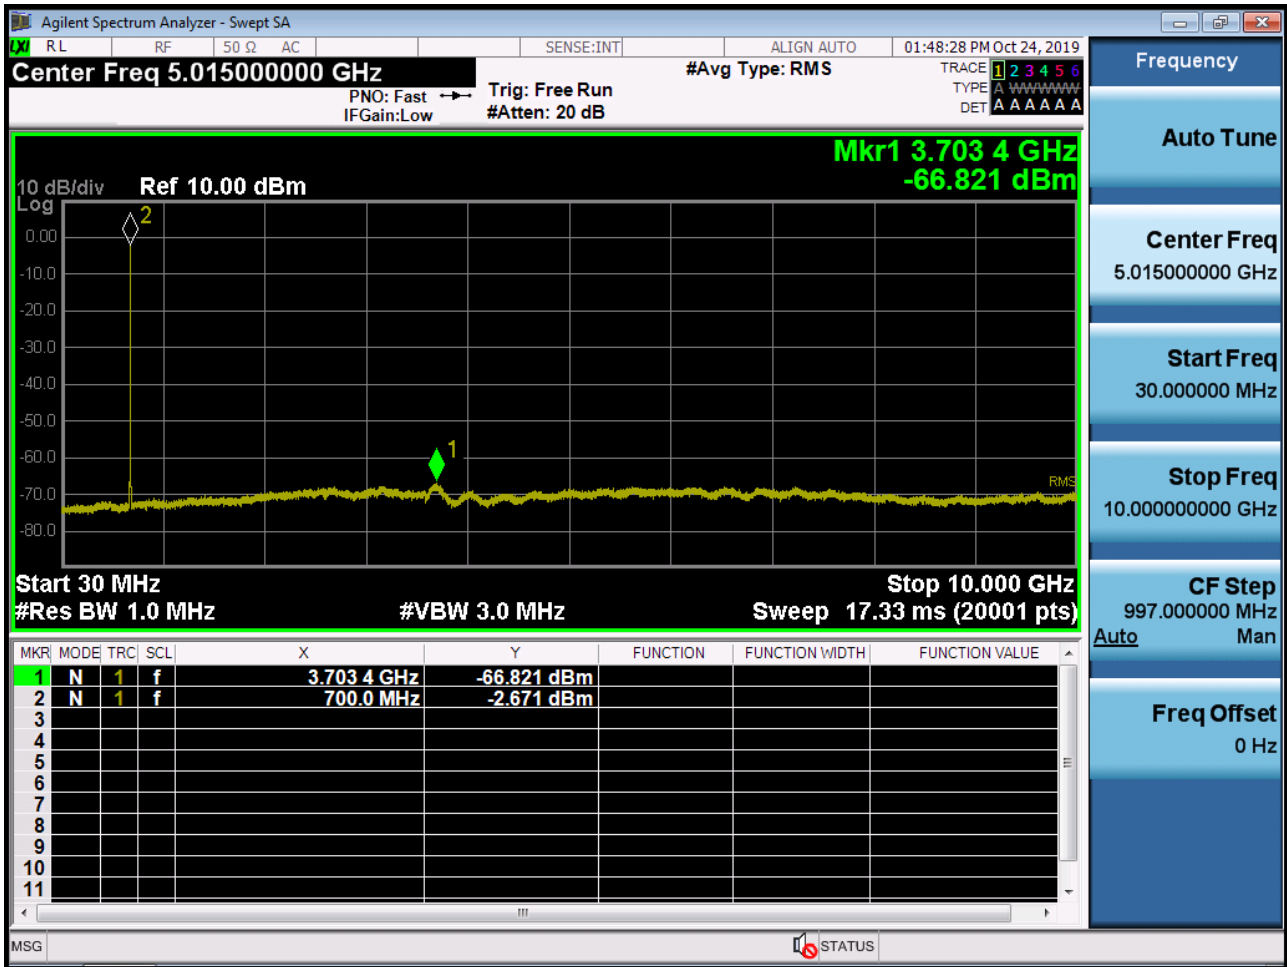


BAND 12. Conducted Spurious Plot _ (23095ch_1.4MHz_QPSK_RB 1_0)

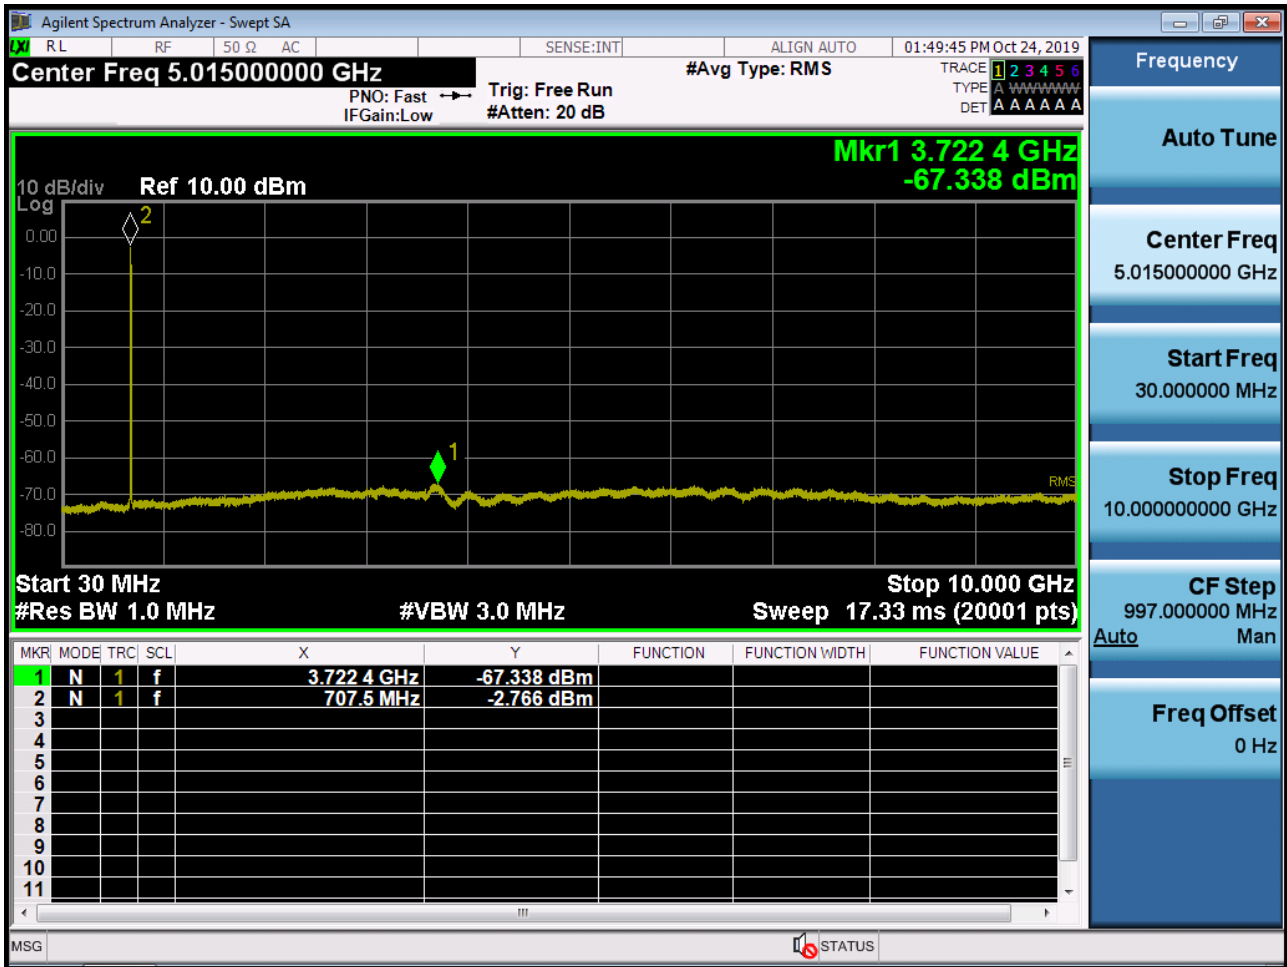


BAND 12. Conducted Spurious Plot _ (23173ch_1.4MHz_QPSK_RB 1_0)

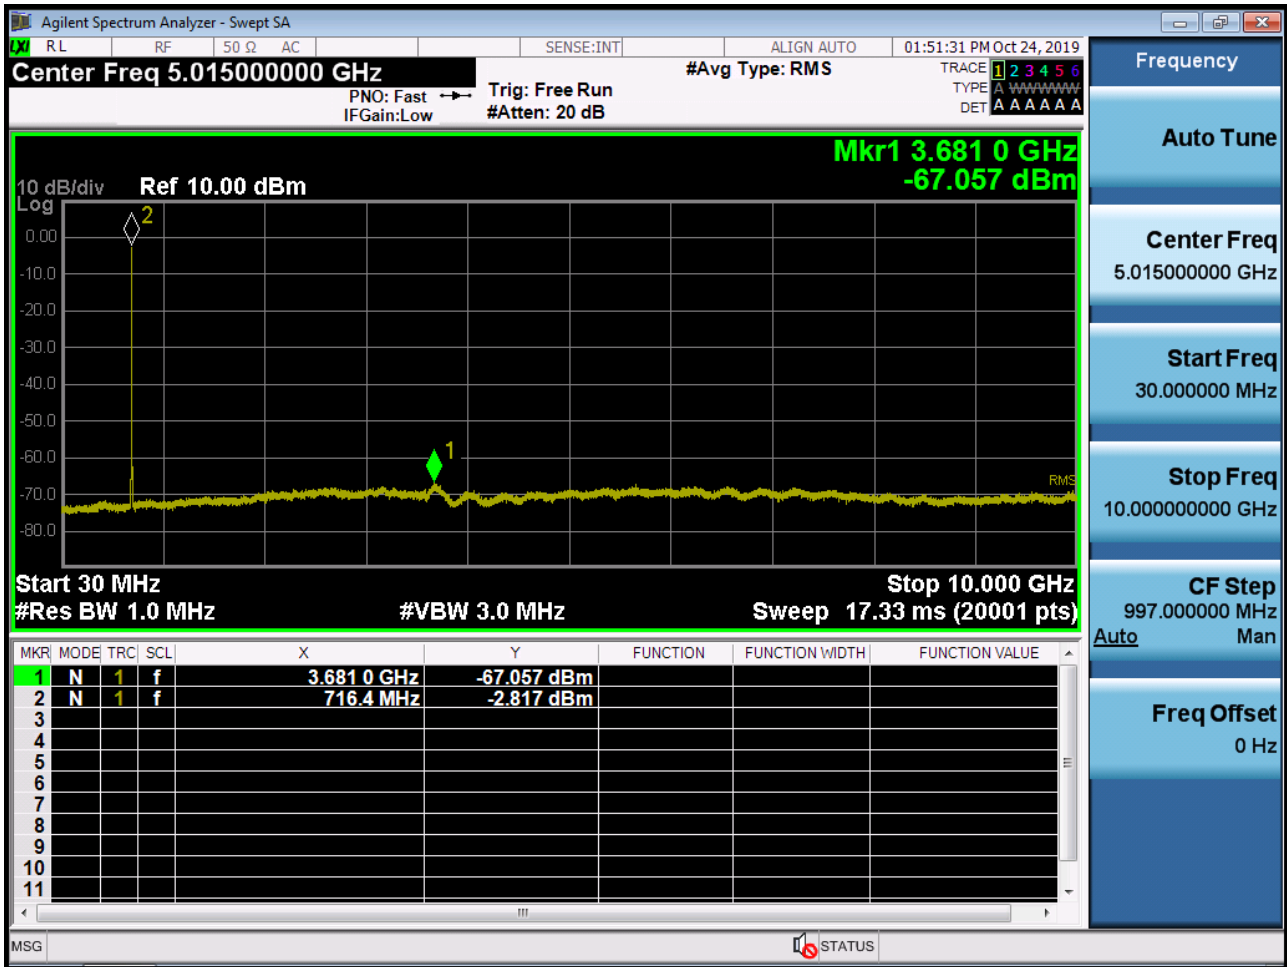


BAND 12. Conducted Spurious Plot _ (23025ch_3MHz_QPSK_RB 1_0)

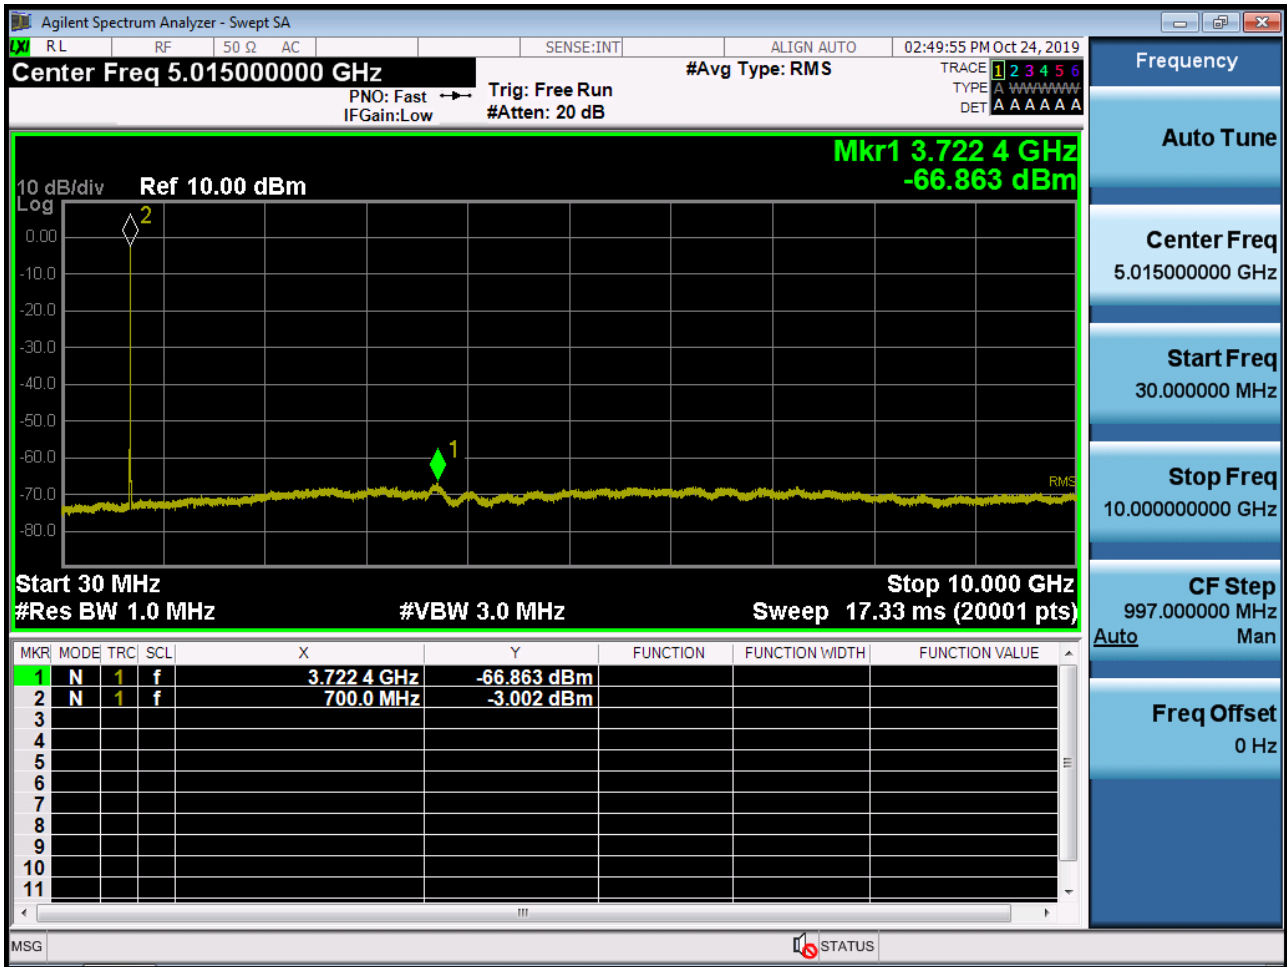


BAND 12. Conducted Spurious Plot _ (23095ch_3MHz_QPSK_RB 1_0)

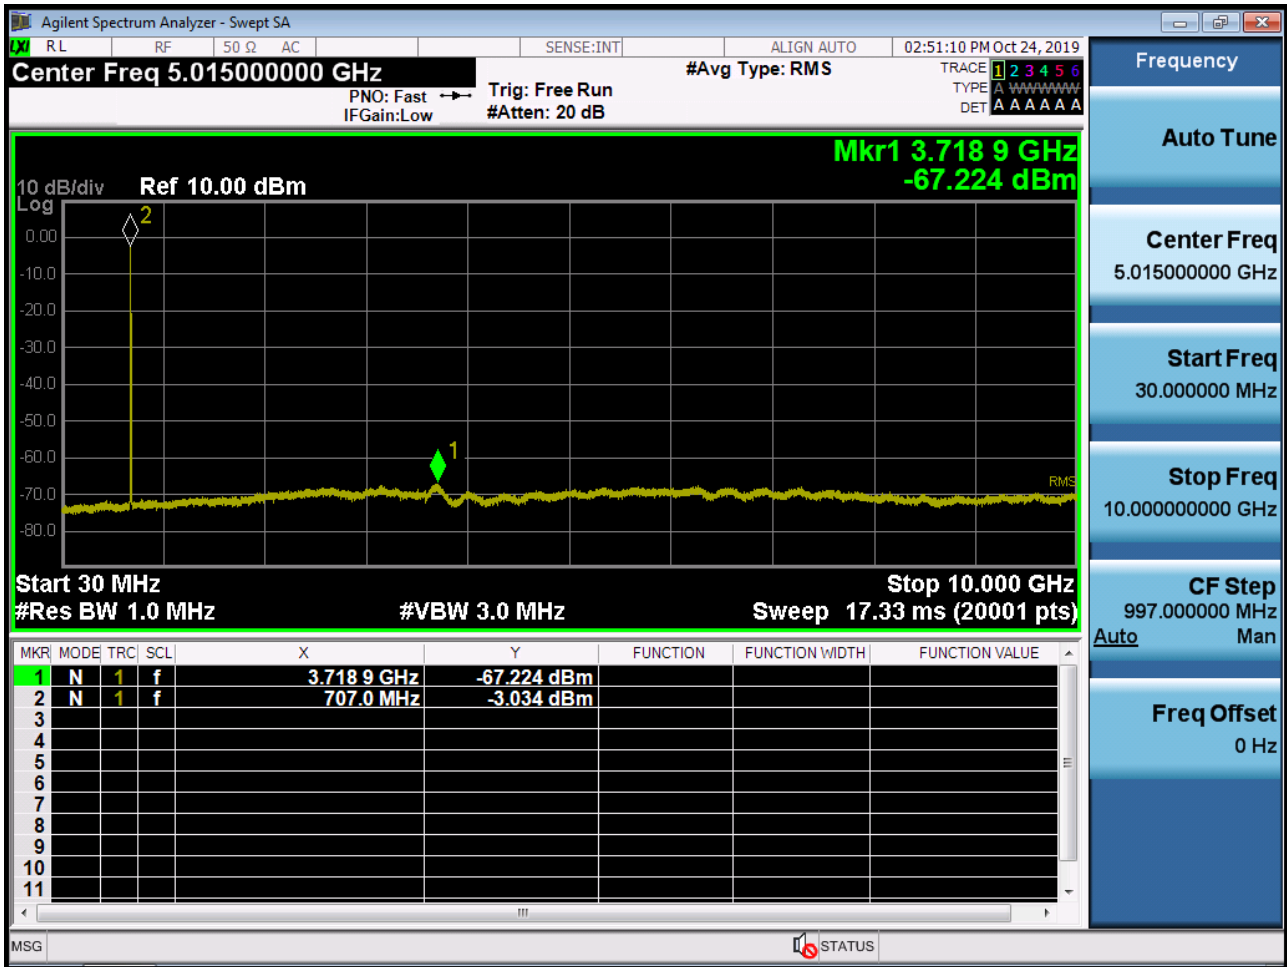


BAND 12. Conducted Spurious Plot _ (23165ch_3MHz_QPSK_RB 1_0)

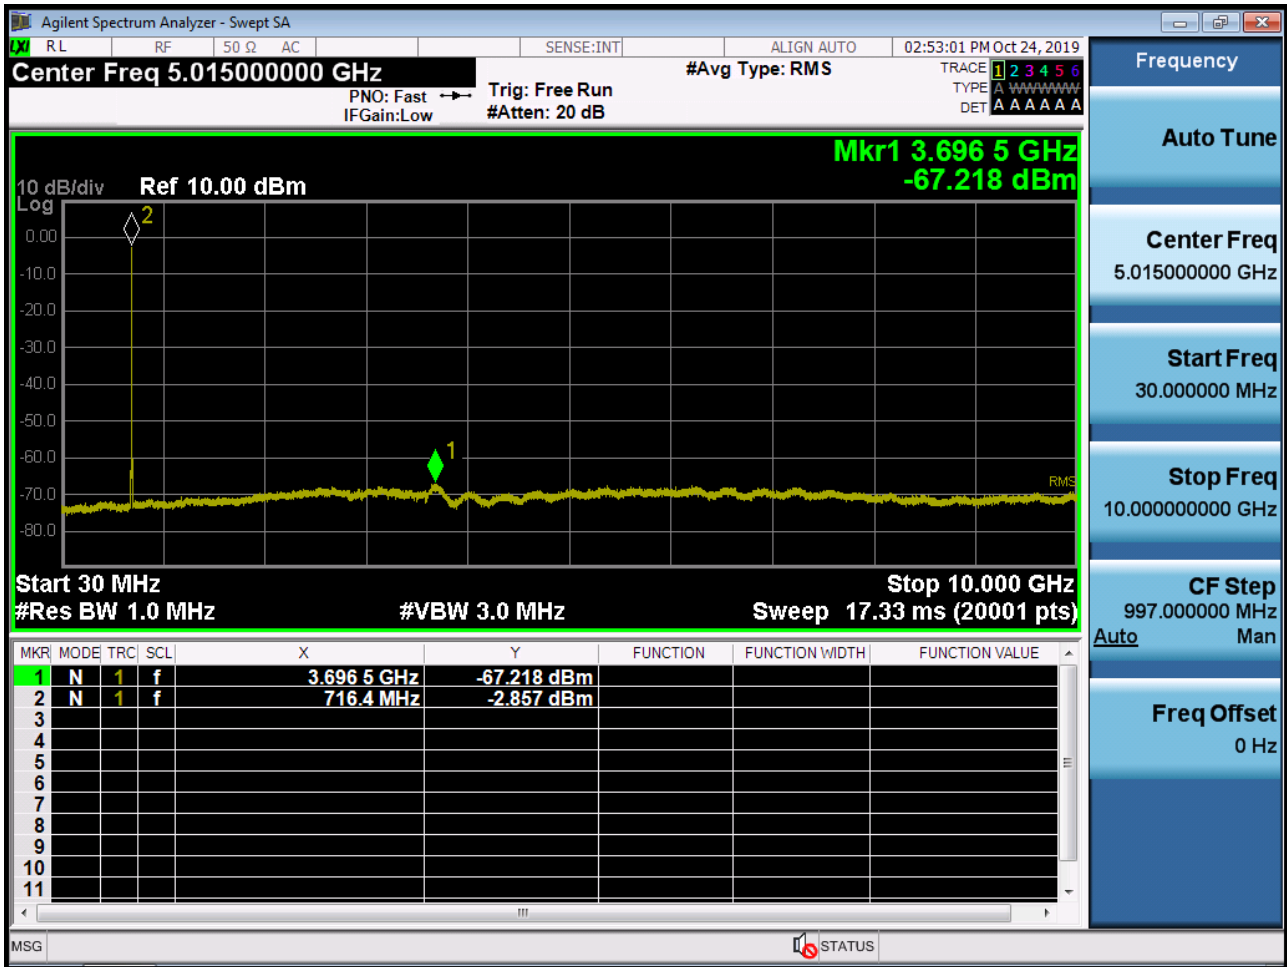


BAND 12. Conducted Spurious Plot _ (23035ch_5MHz_QPSK_RB 1_0)

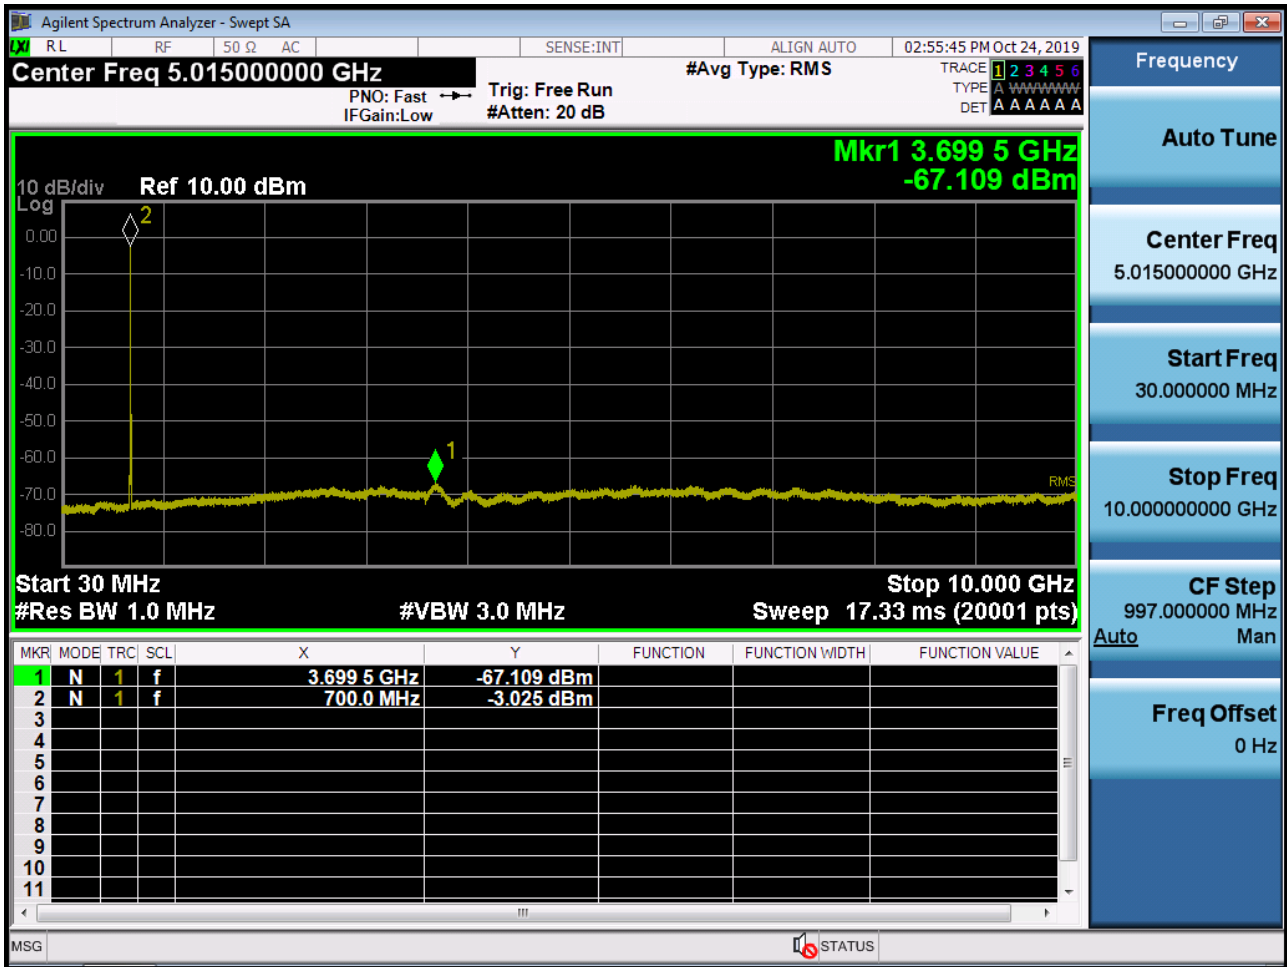


BAND 12. Conducted Spurious Plot _ (23095ch_5MHz_QPSK_RB 1_0)

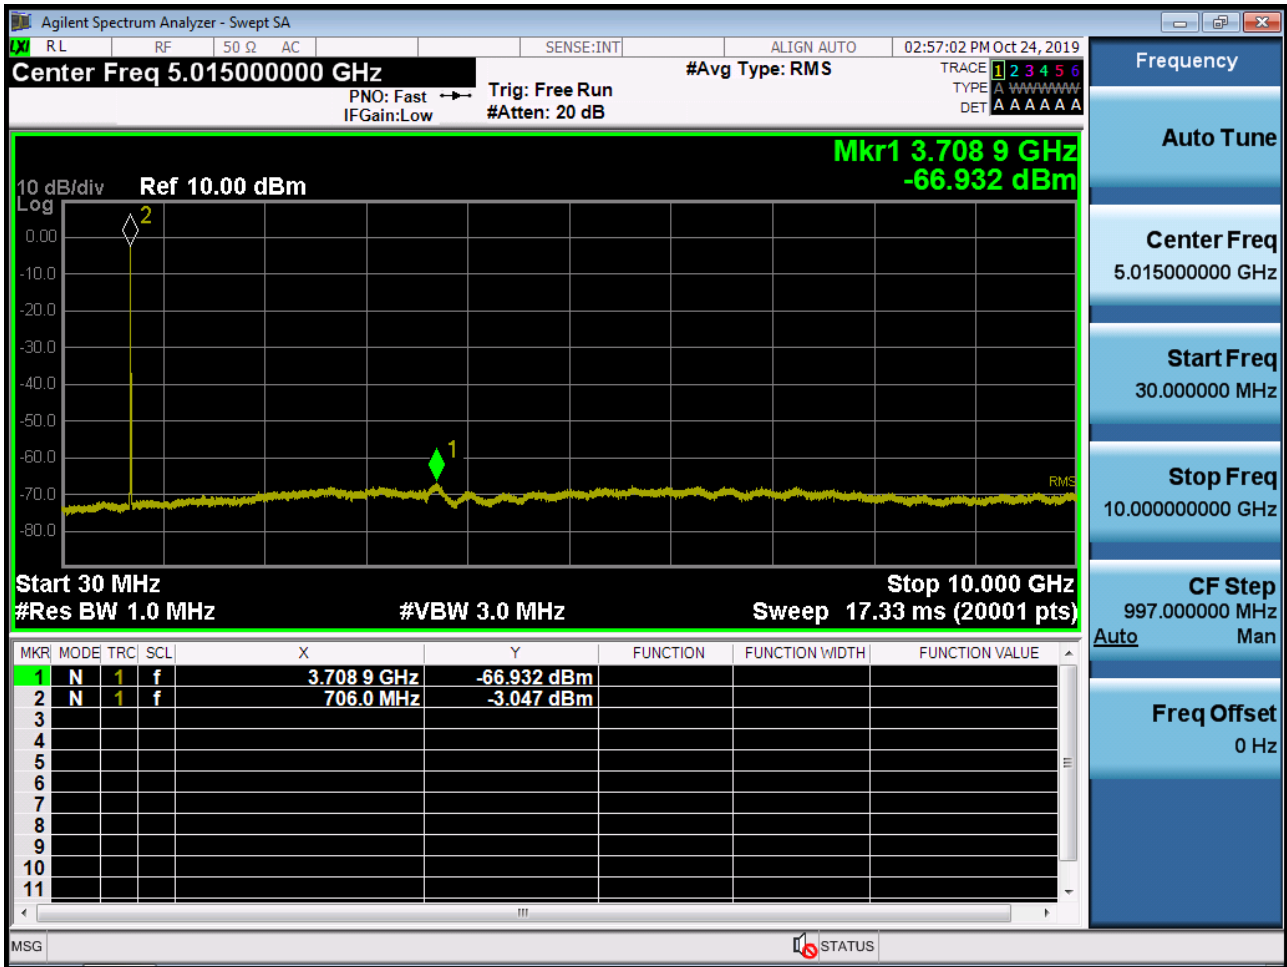


BAND 12. Conducted Spurious Plot _ (23155ch_5MHz_QPSK_RB 1_0)

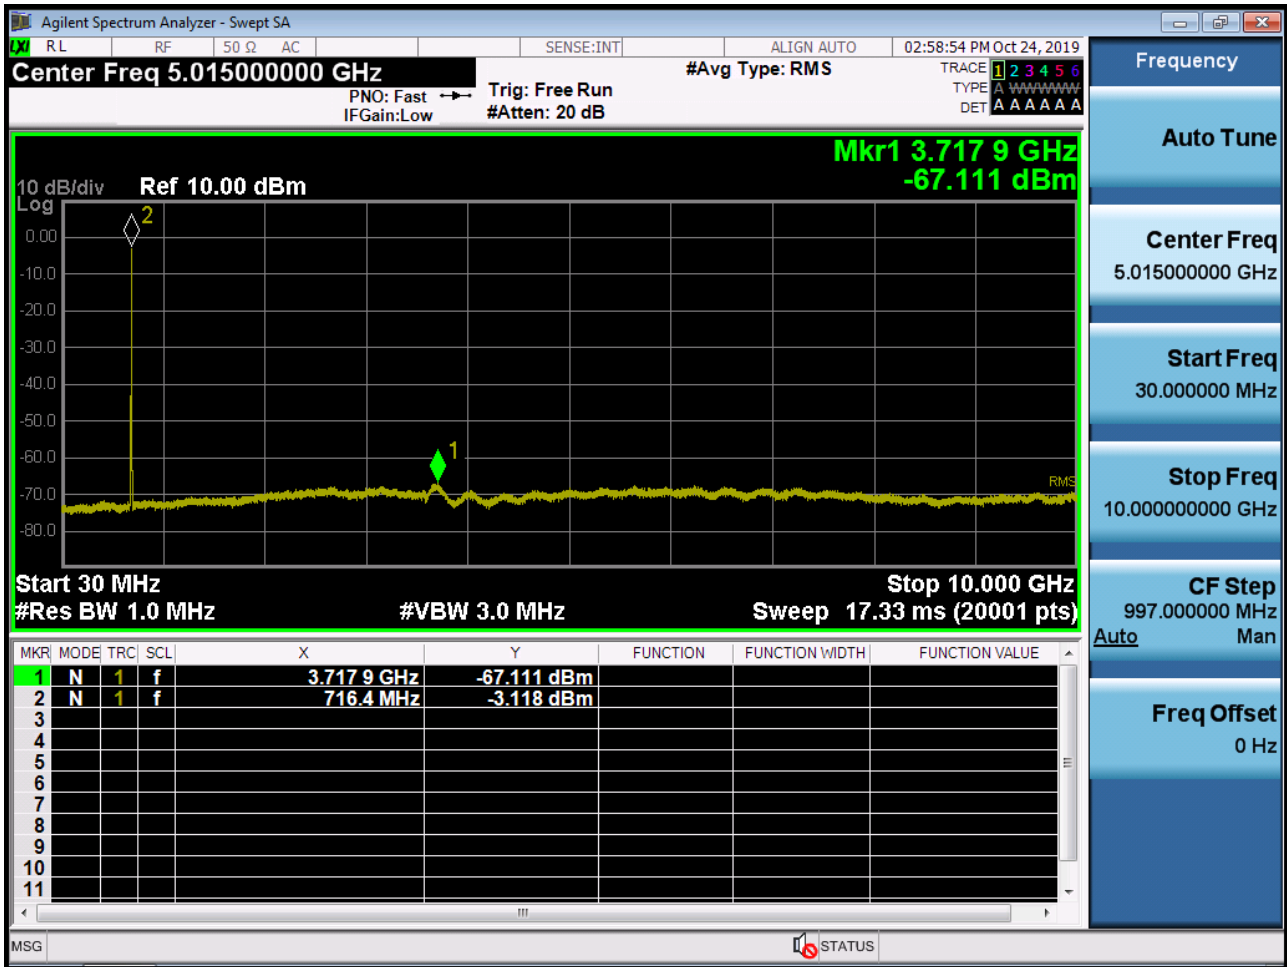


BAND 12. Conducted Spurious Plot _ (23060ch_10MHz_QPSK_RB 1_0)

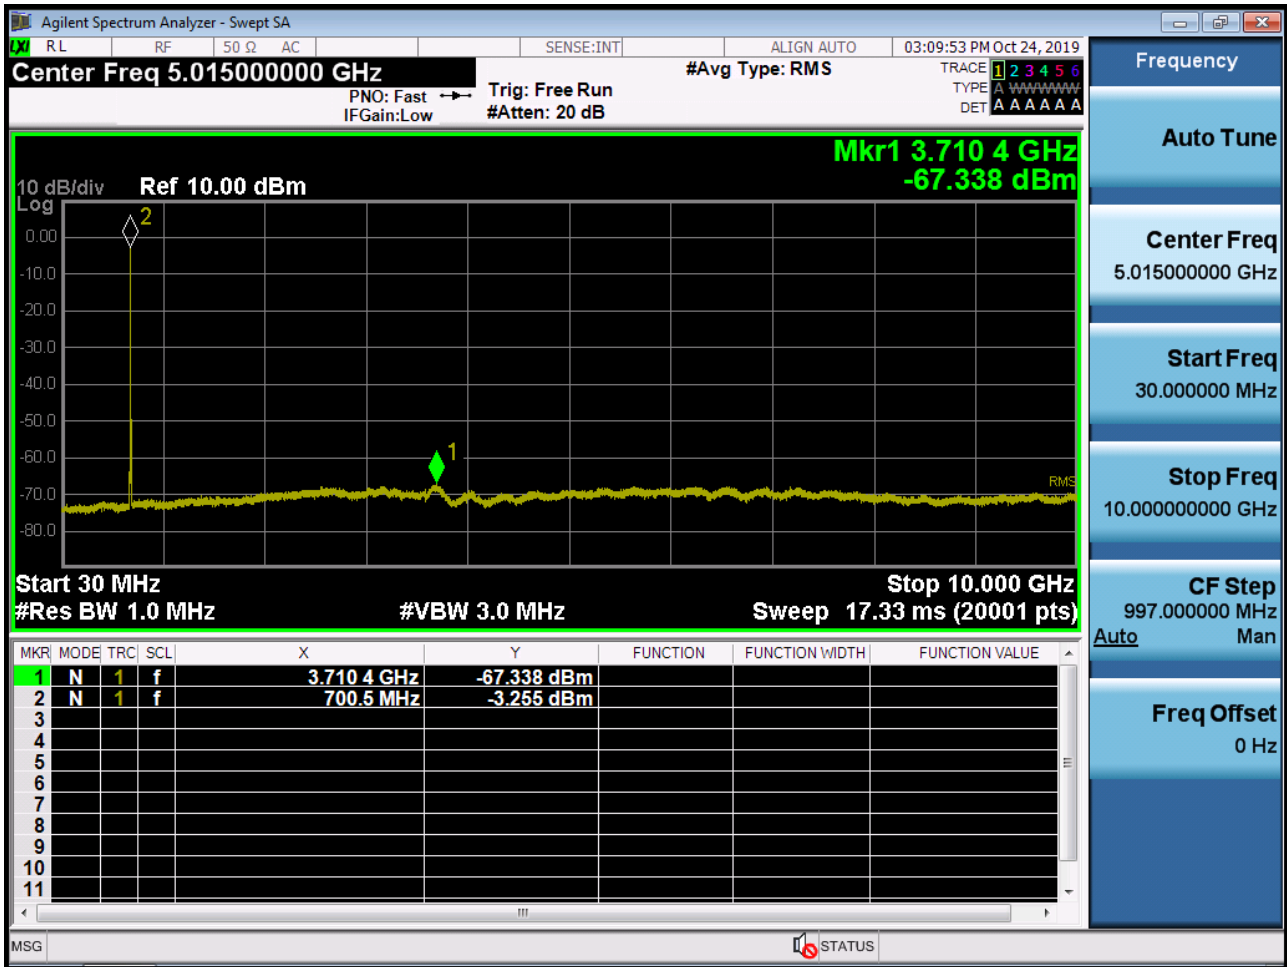

BAND 12. Conducted Spurious Plot _ (23095ch_10MHz_QPSK_RB 1_0)

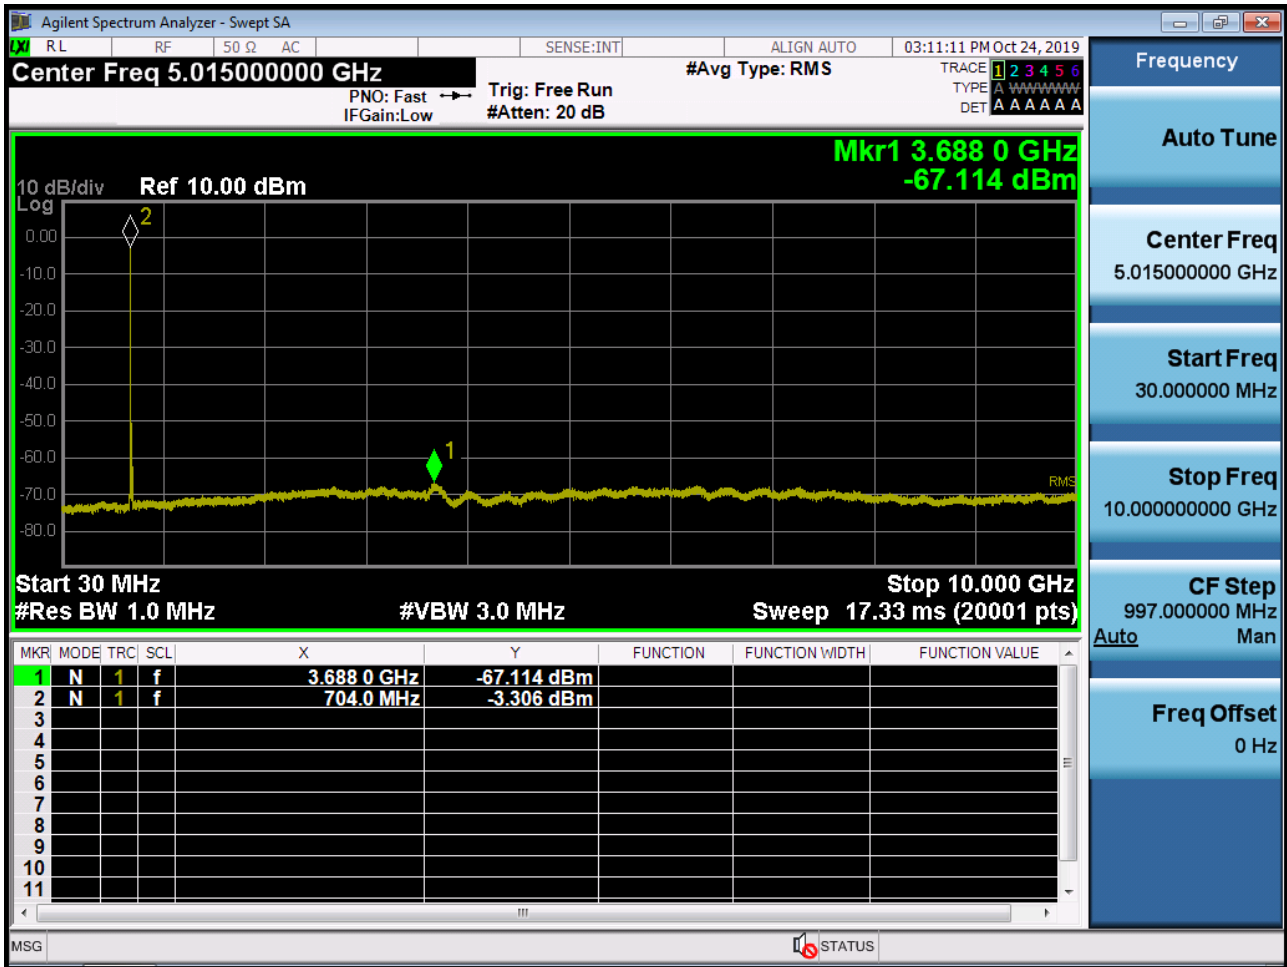

BAND 12. Conducted Spurious Plot _ (23130ch_10MHz_QPSK_RB 1_0)

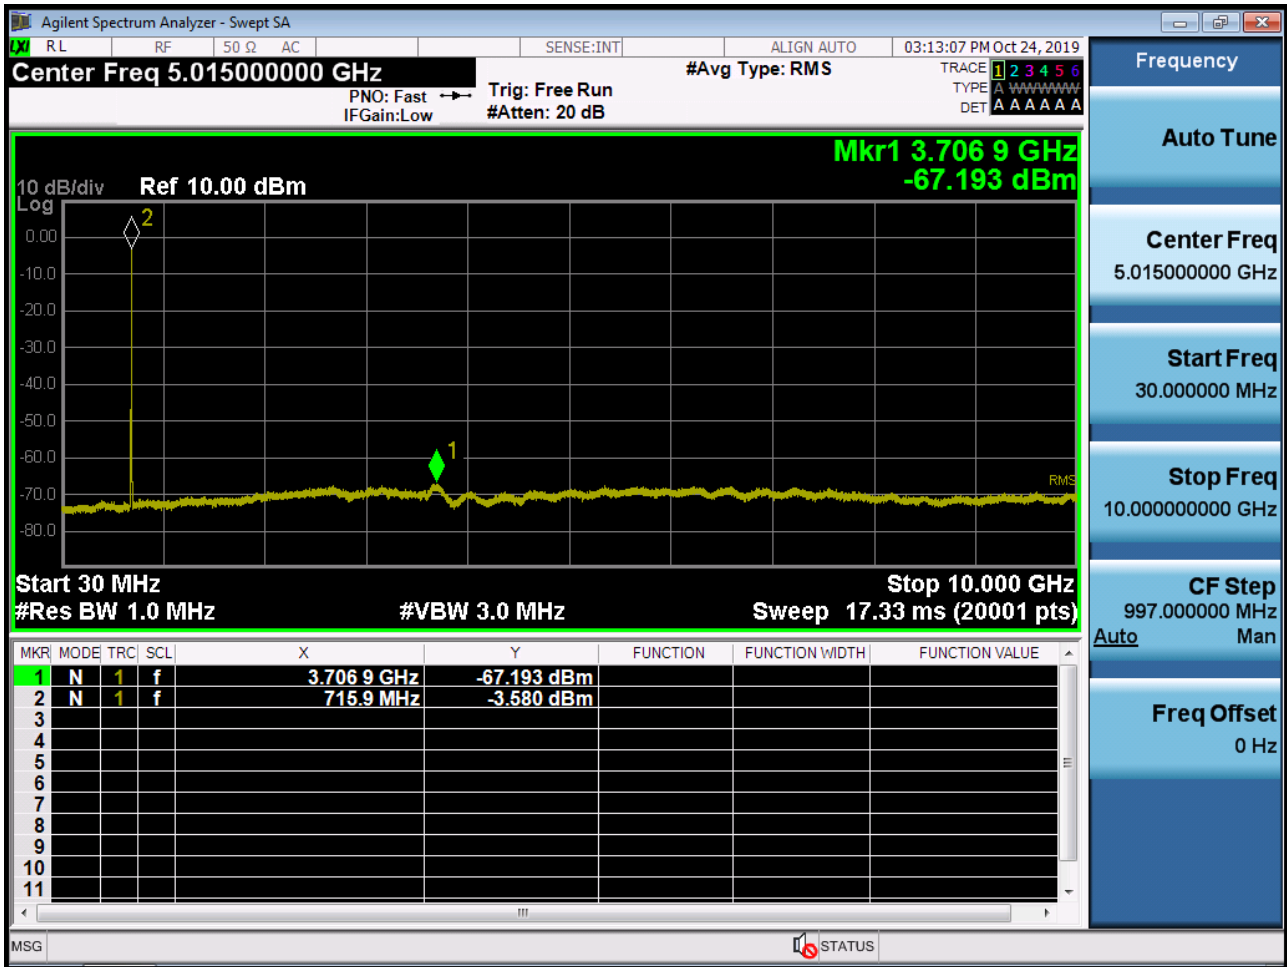

10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1912-FI012-P