

# FCC/IC LTE REPORT

## Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Date of Issue:**  
December 23, 2019

**Address:**  
129, Samsung-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Location:**  
HCT CO., LTD.,  
74, Seoicheon-ro 578beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

**Report No.:** HCT-RF-1912-FI013-R1

<b>FCC ID:</b>	<b>A3LSMT307U</b>
<b>IC:</b>	<b>649E-SMT307U</b>
<b>APPLICANT:</b>	<b>SAMSUNG Electronics Co., Ltd.</b>

Model(s): SM-T307U  
 EUT Type: Tablet  
 FCC Classification: PCS Licensed Transmitter (PCB)  
 FCC Rule Part(s): §27, §2  
 IC Rule(s): RSS-Gen Issue5, RSS-130 Issue2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band13 (5)	779.5 –784.5	4M52G7D	QPSK	0.111	20.46
		4M54W7D	16QAM	0.085	19.28
		4M52W7D	64QAM	0.069	18.40
LTE – Band13 (10)	782.0	8M99G7D	QPSK	0.121	20.84
		8M95W7D	16QAM	0.091	19.60
		8M96W7D	64QAM	0.072	18.59

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



**Report prepared by : Jae Ryang Do**  
**Engineer of Telecommunication Testing Center**



**Report approved by : Jong Seok Lee**  
**Manager of Telecommunication Testing Center**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1912-FI013	December 11, 2019	- First Approval Report
HCT-RF-1912-FI013-R1	December 23, 2019	- Added test procedure to Section 3.10.

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.(HCT Accreditation No.: KT197)

## Table of Contents

1. GENERAL INFORMATION .....	4
2. INTRODUCTION .....	5
2.1. DESCRIPTION OF EUT.....	5
2.2. MEASURING INSTRUMENT CALIBRATION .....	5
2.3. TEST FACILITY .....	5
3. DESCRIPTION OF TESTS.....	6
3.1 TEST PROCEDURE .....	6
3.2 RADIATED POWER.....	7
3.3 RADIATED SPURIOUS EMISSIONS .....	8
3.4 OCCUPIED BANDWIDTH. ....	9
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	10
3.6 BAND EDGE .....	11
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	12
3.8 WORST CASE(RADIATED TEST) .....	13
3.9 WORST CASE(CONDUCTED TEST) .....	14
3.10 RECEIVER SPURIOUS EMISSIONS .....	15
4. LIST OF TEST EQUIPMENT .....	17
5. MEASUREMENT UNCERTAINTY .....	18
6. SUMMARY OF TEST RESULTS .....	19
7. SAMPLE CALCULATION.....	20
7.1 ERP Sample Calculation.....	20
7.2 EIRP Sample Calculation.....	20
7.3. Emission Designator.....	21
8. TEST DATA .....	22
8.1 EFFECTIVE RADIATED POWER.....	22
8.2 RADIATED SPURIOUS EMISSIONS .....	23
8.3 OCCUPIED BANDWIDTH .....	26
8.4 CONDUCTED SPURIOUS EMISSIONS .....	27
8.5 BAND EDGE .....	27
8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	28
8.7 RECEIVER SPURIOUS EMISSIONS .....	32
9. TEST PLOTS.....	33
10. APPENDIX A_ TEST SETUP PHOTO .....	56

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMT307U
<b>IC</b>	649E-SMT307U
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter (PCB)
<b>FCC Rule Part(s):</b>	§27, §2
<b>IC Rule(s):</b>	RSS-Gen Issue5, RSS-130 Issue2
<b>EUT Type:</b>	Tablet
<b>Model(s):</b>	SM-T307U
<b>Tx Frequency:</b>	779.5 MHz –784.5 MHz (LTE – Band 13 (5MHz)) 782 MHz (LTE – Band 13 (10 MHz))
<b>Date(s) of Tests:</b>	October 22, 2019 ~ November 25, 2019

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Tablet with UMTS and LTE.

It also supports IEEE 802.11 a/b/g/n/ac (HT20/40/80), Bluetooth, BT LE, ANT+.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $>$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamntal frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

### 3.4 OCCUPIED BANDWIDTH.

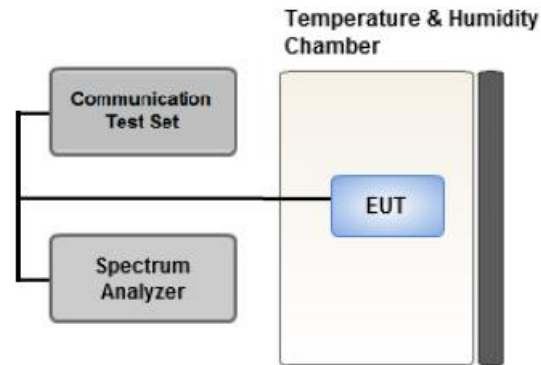

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### 3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

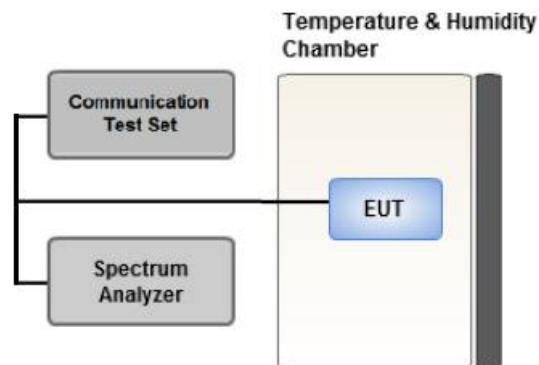

Test setup

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

### 3.6 BAND EDGE

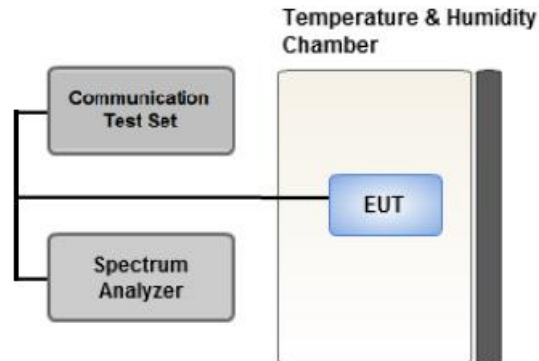

#### Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


#### Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

### 3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

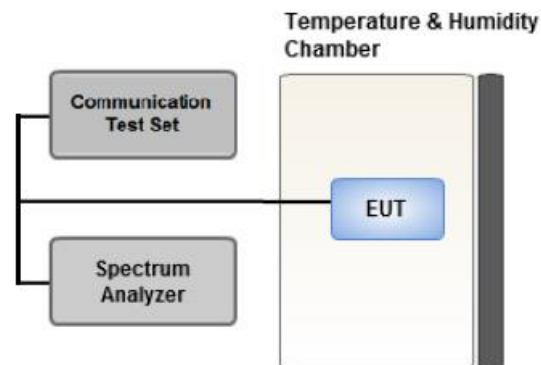

#### Test setup

#### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20°C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter.

Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at

least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### 3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.

[ Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Y

### 3.9 WORST CASE(CONDUCTED TEST)

- Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

Conducted Output Power value can be confirmed on the SAR report.

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
<b>Occupied Bandwidth</b>	QPSK, 16QAM, 64QAM	5, 10	Mid	Full RB	0
<b>Band Edge</b>	QPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
5, 10	Low, High	Full RB	0		
	<b>Spurious and Harmonic Emissions at Antenna Terminal</b>	QPSK	5, 10	Low, Mid, High	1

### 3.10 RECEIVER SPURIOUS EMISSIONS

#### Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz
6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

## **Above 1 GHz**

### **Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).
  - ◆ Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq 3 \times$  RBW
  - (2) Measurement Type(Average):
    - We performed using a reduced video BW method was done with the analyzer in linear mode
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds

The actual setting value of VBW = 1 kHz
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

**4. LIST OF TEST EQUIPMENT**

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibrati on Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	06/10/2019	Annual	06/10/2020
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	06/10/2019	Annual	06/10/2020
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	05/03/2019	Annual	05/03/2020
Agilent	E3632A/DC Power Supply	MY40004326	07/01/2019	Annual	07/01/2020
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93000717	08/14/2019	Annual	08/14/2020
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	01/28/2019	Biennial	01/28/2021
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	05/08/2019	Annual	05/08/2020
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2019	Annual	06/04/2020
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/14/2019	Annual	10/14/2020
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/27/2019	Annual	08/27/2020
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	08/23/2018	Biennial	08/23/2020
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6201502997	08/09/2019	Annual	08/09/2020
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/30/2019	Annual	01/30/2020
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/15/2019	Annual	07/15/2020
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	05/17/2019	Annual	05/17/2020
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	IC Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	RSS Gen(6.7)	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(c)	RSS 130(4.7)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
On all frequencies between 763-775 MHz and 793-805 MHz.	§27.53(c)(4)	RSS 130(4.7)	< 65 + 10log10 (P[Watts])	PASS <u>(See Note3)</u>
Conducted Output Power	§2.1046	-	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, § 27.54	RSS 130(4.5)	Emission must remain in band	PASS

**Note:**

1. See SAR Report
2. The same samples were used for SAR and EMC
3. Since it was not possible to set the resolution bandwidth to 6.25 kHz with the available equipment, a bandwidth of 10 kHz was used instead to show compliance.

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	IC Section(s)	Test Limit	Test Result
Effective Radiated Power	27.50(b)(10)	RSS 130(4.6)	< 3 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(g)	RSS 130(4.7)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS
Undesirable Emissions in the 1559 – 1610 MHz band	2.1053, 27.53(f)	RSS 130(4.7)	< -70dBW/MHz EIRP (wideband) < -80dBW EIRP (narrowband)	PASS
Receiver Spurious Emissions	N/A	RSS Gen(7)	Section 8.7	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

**ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

**EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

**Emission Designator = 249KGXW**

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

**Emission Designator = 249KG7W**

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

**Emission Designator = 4M17F9W**

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### 16QAM Modulation

**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### 64QAM Modulation

**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W dBm
779.5	LTE B13 (5 MHz)	QPSK	-30.39	31.51	-10.08	1.24	H	< 3.00	0.105	20.20
		16-QAM	-31.48	30.42	-10.08	1.24	H		0.081	19.11
		64-QAM	-32.51	29.39	-10.08	1.24	H		0.064	18.08
782.0		QPSK	-30.54	31.57	-10.09	1.24	H		0.106	20.24
		16-QAM	-31.70	30.41	-10.09	1.24	H		0.081	19.08
		64-QAM	-32.66	29.45	-10.09	1.24	H		0.065	18.12
784.5		QPSK	-30.50	31.80	-10.10	1.24	H		0.111	20.46
		16-QAM	-31.68	30.62	-10.10	1.24	H		0.085	19.28
		64-QAM	-32.56	29.74	-10.10	1.24	H		0.069	18.40

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W dBm
782.0	LTE B13 (10 MHz)	QPSK	-29.94	32.17	-10.09	1.24	H	< 3.00	0.121	20.84
		16-QAM	-31.18	30.93	-10.09	1.24	H		0.091	19.60
		64-QAM	-32.19	29.92	-10.09	1.24	H		0.072	18.59

**8.2 RADIATED SPURIOUS EMISSIONS**

- ▣ OPERATING FREQUENCY: 784.5 MHz
- ▣ MEASURED OUTPUT POWER: 22.61 dBm = 0.182 W
- ▣ MODE: LTE B13
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  35.61 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23205 (779.5)	1,559.0	-54.68	8.93	-62.43	1.79	H	-55.29	77.90
	2,338.5	-55.55	9.83	-58.99	2.20	V	-51.36	73.97
	3,118.0	-58.02	11.15	-59.27	2.60	V	-50.72	73.33
23230 (782.0)	1,564.0	-54.25	8.99	-62.58	1.79	V	-55.38	77.99
	2,346.0	-55.35	9.87	-58.70	2.21	H	-51.04	73.65
	3,128.0	-57.50	11.15	-58.67	2.59	V	-50.11	72.72
23255 (784.5)	1,569.0	-54.24	9.05	-63.15	1.79	V	-55.89	78.50
	2,353.5	-55.69	9.94	-59.07	2.23	V	-51.36	73.98
	3,138.0	-57.04	11.18	-58.35	2.60	H	-49.77	72.38

- ▣ OPERATING FREQUENCY: 782.00 MHz
- ▣ MEASURED OUTPUT POWER: 22.99 dBm = 0.199 W
- ▣ MODE: LTE B13
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  35.99 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23230 (782.0)	1,564.0	-53.69	8.99	-62.02	1.79	V	-54.82	77.81
	2,346.0	-56.39	9.87	-59.74	2.21	V	-52.08	75.07
	3,128.0	-58.37	11.15	-59.54	2.59	V	-50.98	73.97

**1559 MHz ~ 1610 MHz BAND**

- ▣ OPERATING FREQUENCY: 779.5 MHz, 782.0 MHz, 784.5 MHz
- ▣ MEASURED OUTPUT POWER: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ WIDEBAND EMISSION LIMIT: -80 dBW/ MHz (= -50 dBm/ MHz)

Operating Frequency (MHz)	Measured Frequency (MHz)	EMISSION TYPE	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Margin (dB)
779.5	1609.9	Narrow Band	-63.14	9.35	-73.25	1.81	V	-65.71	15.71
782.0	1601.8		-63.38	9.30	-73.10	1.82	V	-65.62	15.62
784.5	1603.6		-63.39	9.33	-73.31	1.82	V	-65.80	15.80

Note:

The lower narrowband limit was applied because the spurious emission was not found.

- ▣ OPERATING FREQUENCY: 782.0 MHz
- ▣ MEASURED OUTPUT POWER: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ WIDEBAND EMISSION LIMIT: -80 dBW/ MHz (= -50 dBm/ MHz)

Operating Frequency (MHz)	Measured Frequency (MHz)	EMISSION TYPE	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Margin (dB)
782.0	1602.0	Narrow Band	-63.39	9.30	-73.11	1.82	V	-65.63	15.63

Note:

The lower narrowband limit was applied because the spurious emission was not found.

**8.3 OCCUPIED BANDWIDTH**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
13	5 MHz	782.0	QPSK	25	0	4.5228
			16-QAM	25	0	4.5378
			64-QAM	25	0	4.5154
	10 MHz		QPSK	50	0	8.9863
			16-QAM	50	0	8.9513
			64-QAM	50	0	8.9570

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 34 ~ 39.

**8.4 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
13	5	779.5	3.6915	27.976	-67.255	-39.279	-13.00
		782.0	3.7005	27.976	-67.056	-39.080	
		784.5	3.6920	27.976	-67.138	-39.162	
	10	782.0	3.7119	27.976	-67.097	-39.121	

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 52 ~ 55.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


**8.5 BAND EDGE**

- Plots of the EUT's Band Edge are shown Page 40 ~ 51.

**8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**


- ▣ MODE: LTE 13
- ▣ OPERATING FREQUENCY: 779,500,000 Hz
- ▣ CHANNEL: 23205 (5 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	779 500 006	0.00	0.000 000	0.0000
100%		-30	779 500 021	15.20	0.000 002	0.0195
100%		-20	779 500 023	17.20	0.000 002	0.0221
100%		-10	779 500 026	20.30	0.000 003	0.0260
100%		0	779 500 022	16.80	0.000 002	0.0216
100%		+10	779 500 019	13.70	0.000 002	0.0176
100%		+30	779 499 993	-12.90	-0.000 002	-0.0165
100%		+40	779 500 023	17.60	0.000 002	0.0226
100%		+50	779 499 994	-11.60	-0.000 001	-0.0149
Batt. Endpoint		7.300	+20	779 500 021	15.80	0.000 002

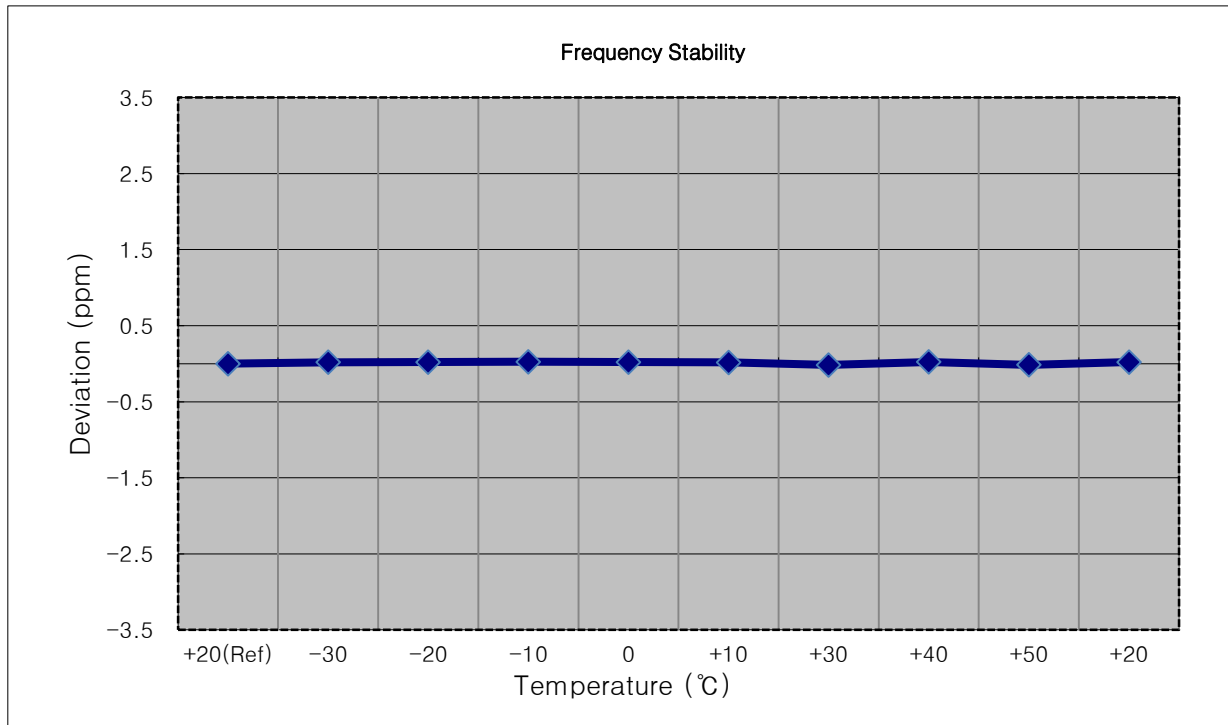


- ▣ MODE: LTE 13
- ▣ OPERATING FREQUENCY: 782,000,000 Hz
- ▣ CHANNEL: 23230 (5 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	782 000 019	0.00	0.000 000	0.0000
100%		-30	782 000 032	12.90	0.000 002	0.0165
100%		-20	782 000 034	15.30	0.000 002	0.0196
100%		-10	782 000 034	15.30	0.000 002	0.0196
100%		0	782 000 033	13.50	0.000 002	0.0173
100%		+10	782 000 007	-12.30	-0.000 002	-0.0157
100%		+30	782 000 035	16.00	0.000 002	0.0205
100%		+40	782 000 031	11.70	0.000 001	0.0150
100%		+50	782 000 031	12.20	0.000 002	0.0156
Batt. Endpoint	7.300	+20	782 000 012	-6.80	-0.000 001	-0.0087

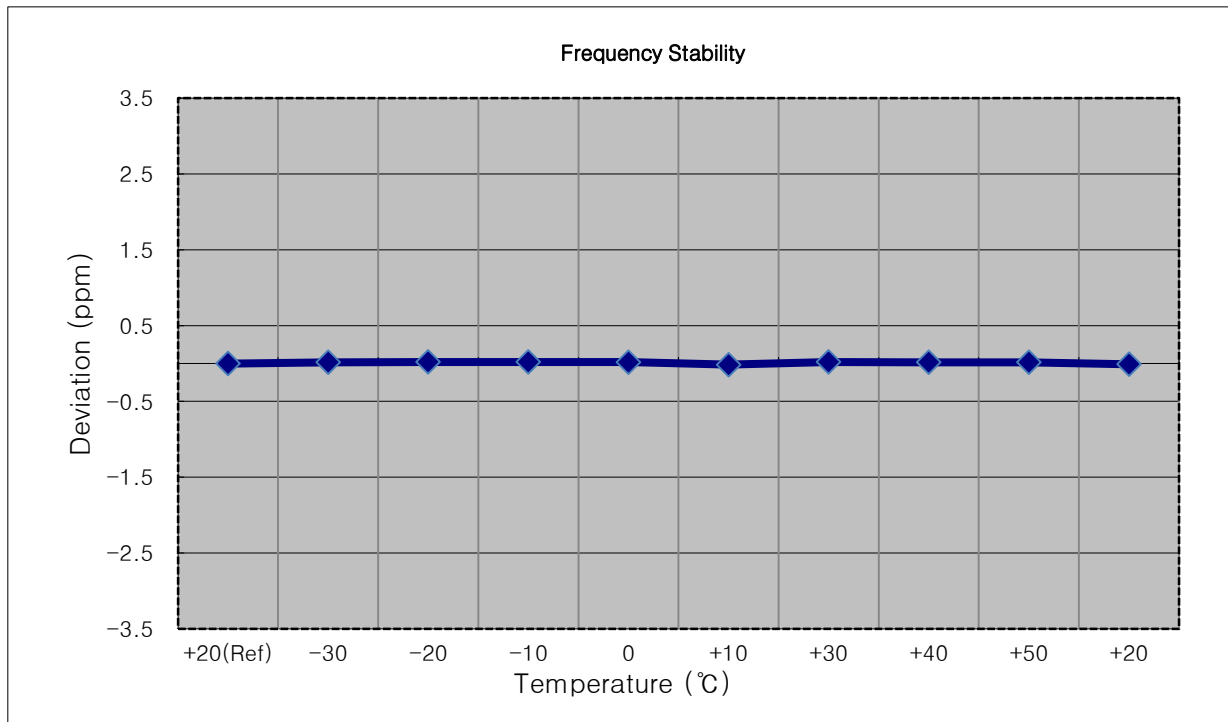


- ▣ MODE: LTE 13
- ▣ OPERATING FREQUENCY: 784,500,000 Hz
- ▣ CHANNEL: 23255 (5 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	784 500 012	0.00	0.000 000	0.0000
100%		-30	784 500 023	11.50	0.000 001	0.0147
100%		-20	784 500 022	10.50	0.000 001	0.0134
100%		-10	784 500 016	4.70	0.000 001	0.0060
100%		0	784 500 028	16.60	0.000 002	0.0212
100%		+10	784 500 003	-8.30	-0.000 001	-0.0106
100%		+30	784 500 023	11.20	0.000 001	0.0143
100%		+40	784 500 024	12.50	0.000 002	0.0159
100%		+50	784 500 024	12.00	0.000 002	0.0153
Batt. Endpoint	7.300	+20	784 499 999	-12.30	-0.000 002	-0.0157

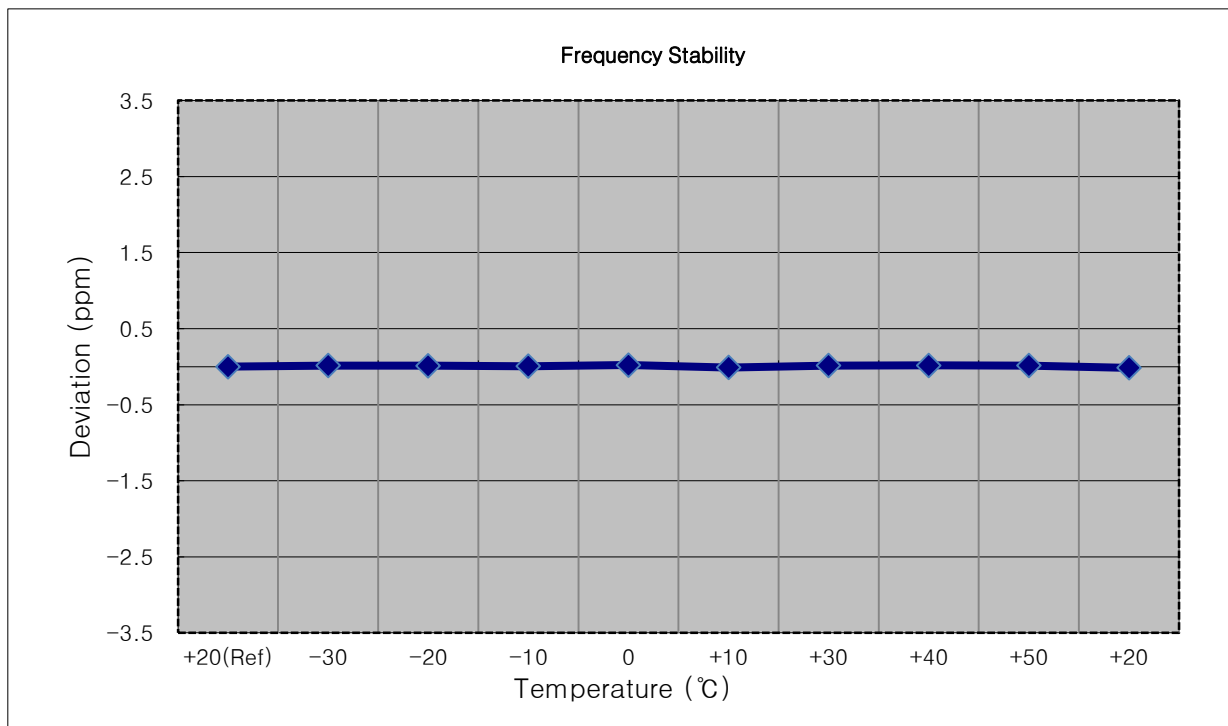

- ▣ MODE: LTE 13
- ▣ OPERATING FREQUENCY: 782,000,000 Hz
- ▣ CHANNEL: 23230 (10 MHz)
- ▣ REFERENCE VOLTAGE: 7.70 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	7.700	+20(Ref)	782 000 008	0.00	0.000 000	0.0000
100%		-30	782 000 021	13.30	0.000 002	0.0170
100%		-20	782 000 023	15.20	0.000 002	0.0194
100%		-10	782 000 025	16.70	0.000 002	0.0214
100%		0	782 000 016	7.90	0.000 001	0.0101
100%		+10	781 999 998	-10.40	-0.000 001	-0.0133
100%		+30	782 000 023	15.30	0.000 002	0.0196
100%		+40	782 000 018	10.20	0.000 001	0.0130
100%		+50	782 000 020	11.60	0.000 001	0.0148
Batt. Endpoint	7.300	+20	781 999 999	-9.30	-0.000 001	-0.0119

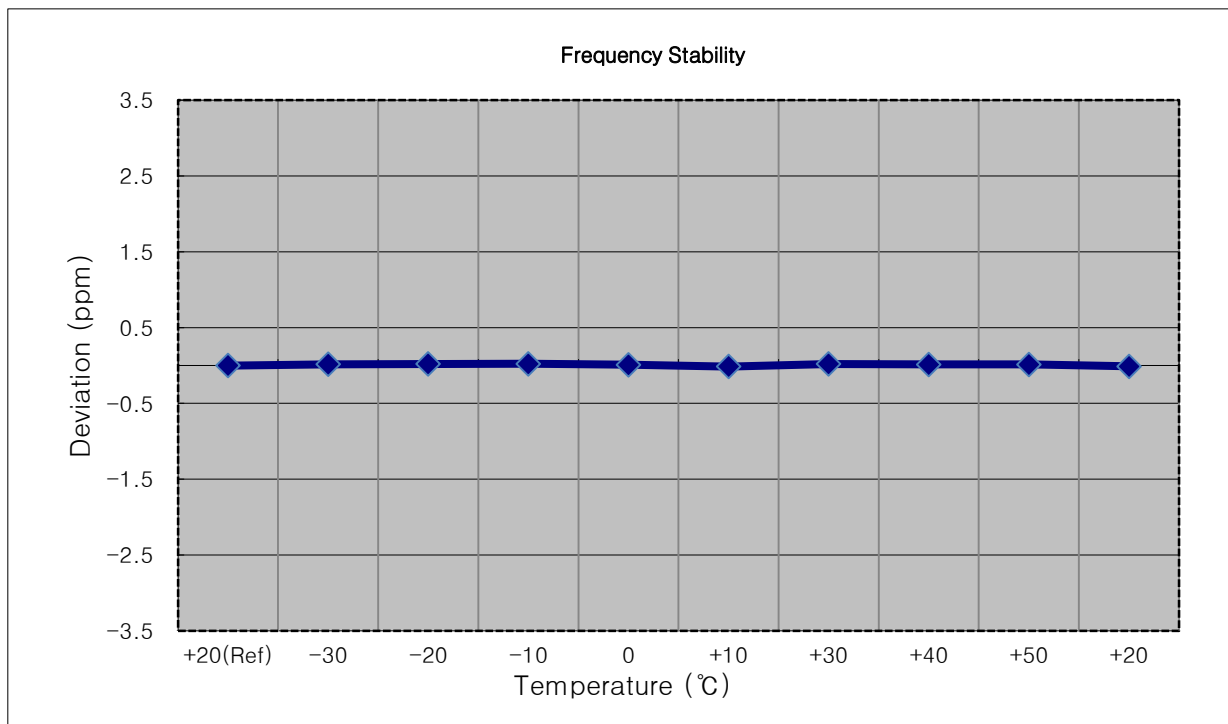

### 8.7 RECEIVER SPURIOUS EMISSIONS

Frequency Range : 30 MHz ~ 1 GHz

Frequency	Reading	Ant. factor+Cable loss- Amp Gain	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Peak Found						

Frequency Range : Above 1 GHz


Frequency	Reading	Ant. factor+Cable loss- Amp Gain	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Peak Found						

#### Limit


Frequency (MHz)	Field Strength ( $\mu$ v/m at 3 meters)
30 – 88	100
88 - 216	150
216 – 960	200
Above 960	500

## 9. TEST PLOTS


BAND 13. Occupied Bandwidth Plot (Ch.23230 QPSK RB 25) 5 MHz

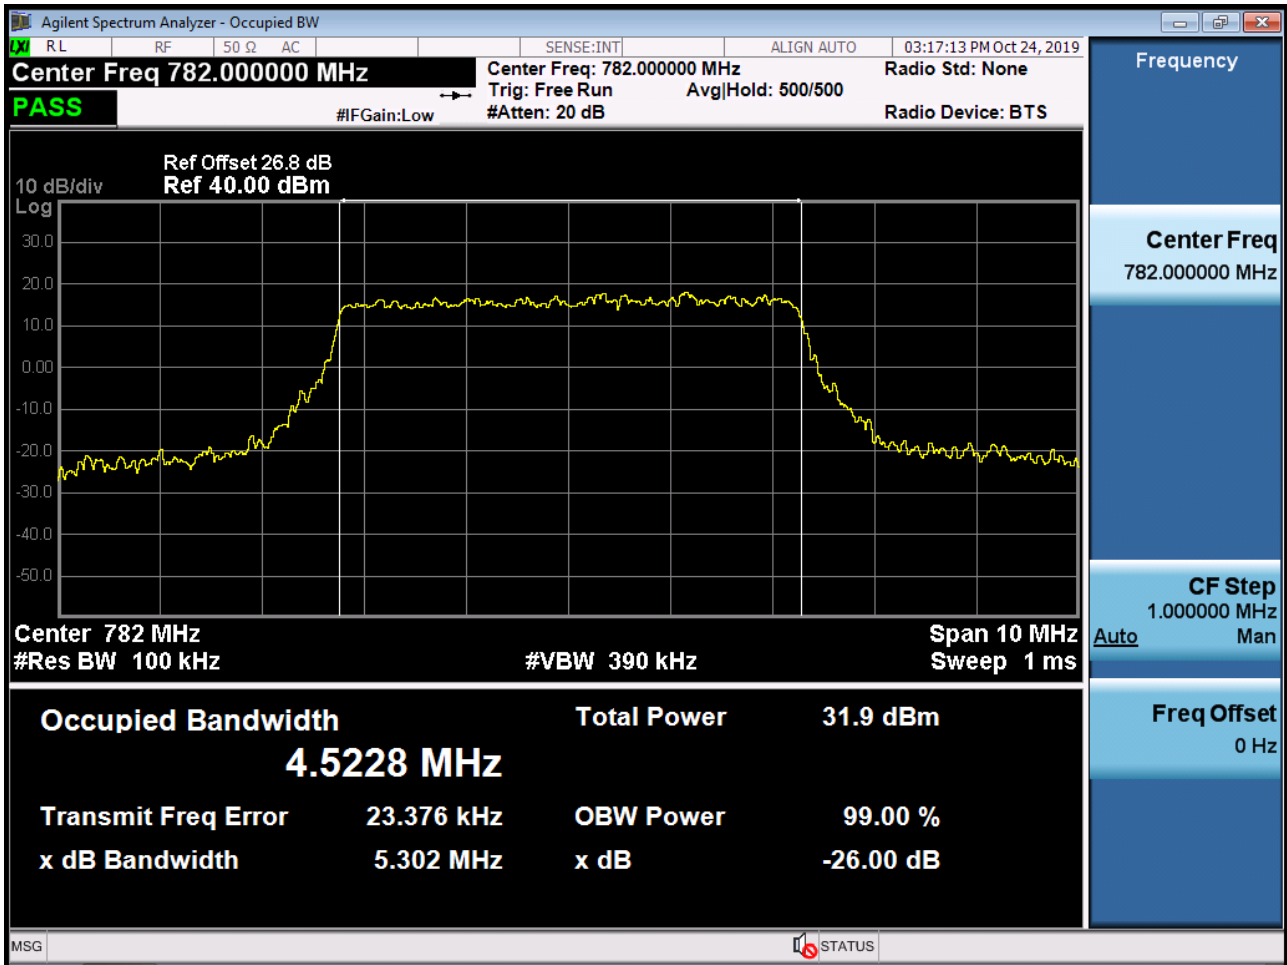


BAND 13. Occupied Bandwidth Plot (Ch.23230 16-QAM RB 25) 5 MHz

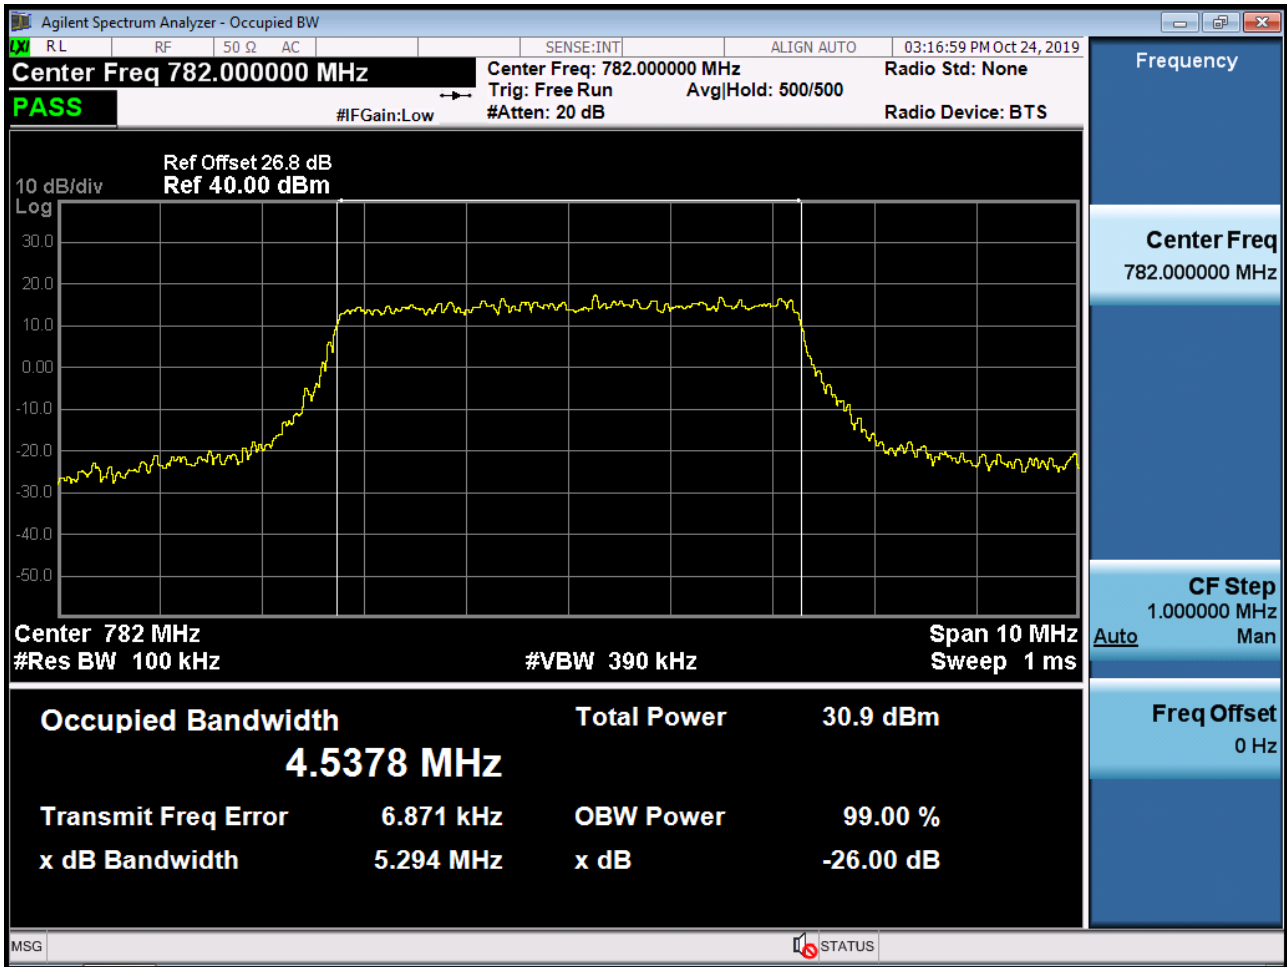


BAND 13. Occupied Bandwidth Plot (Ch.23230 64-QAM RB 25) 5 MHz

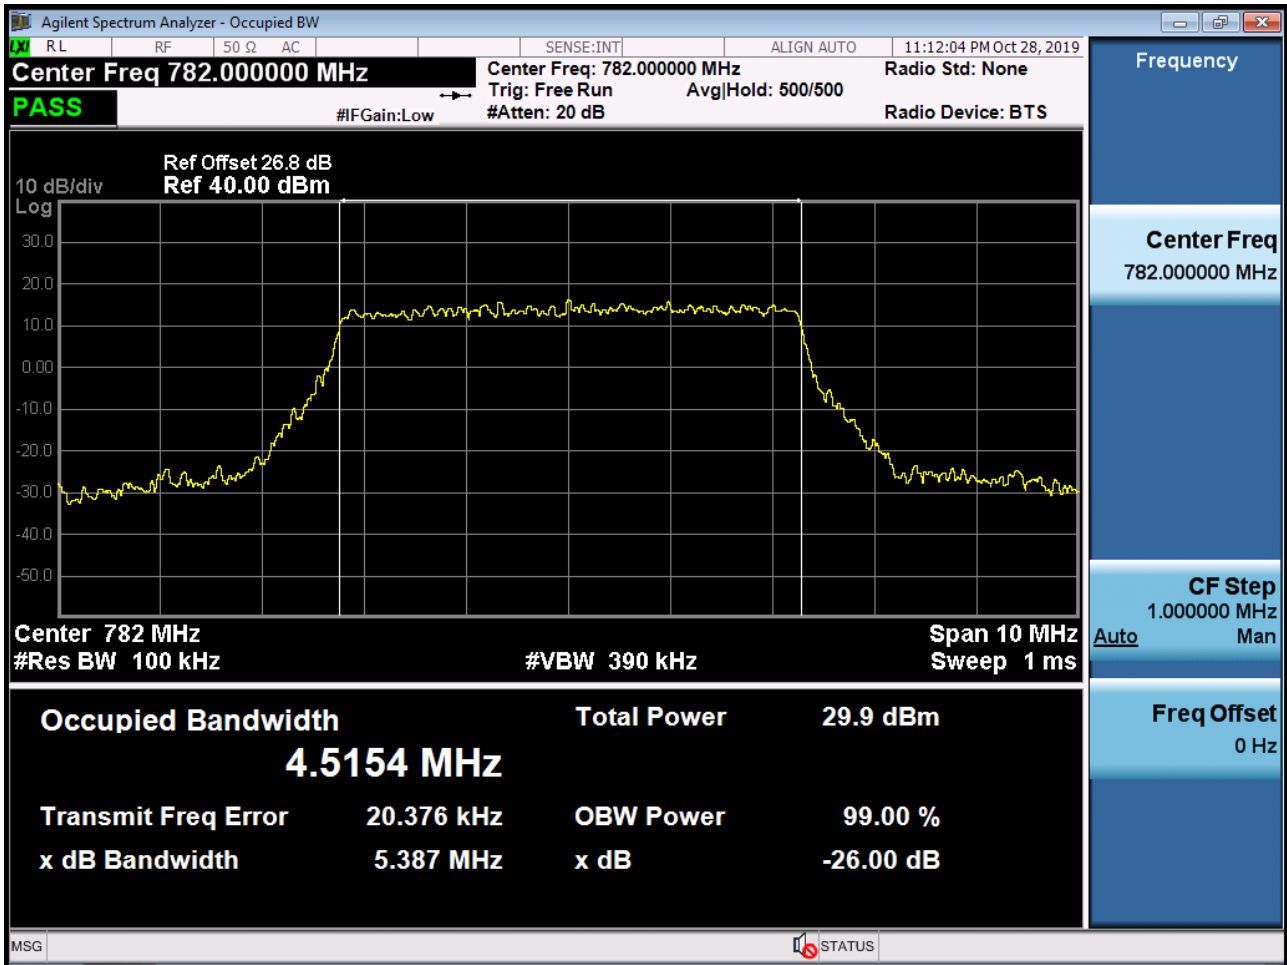


BAND 13. Occupied Bandwidth Plot (Ch.23230 QPSK RB 50) 10 MHz

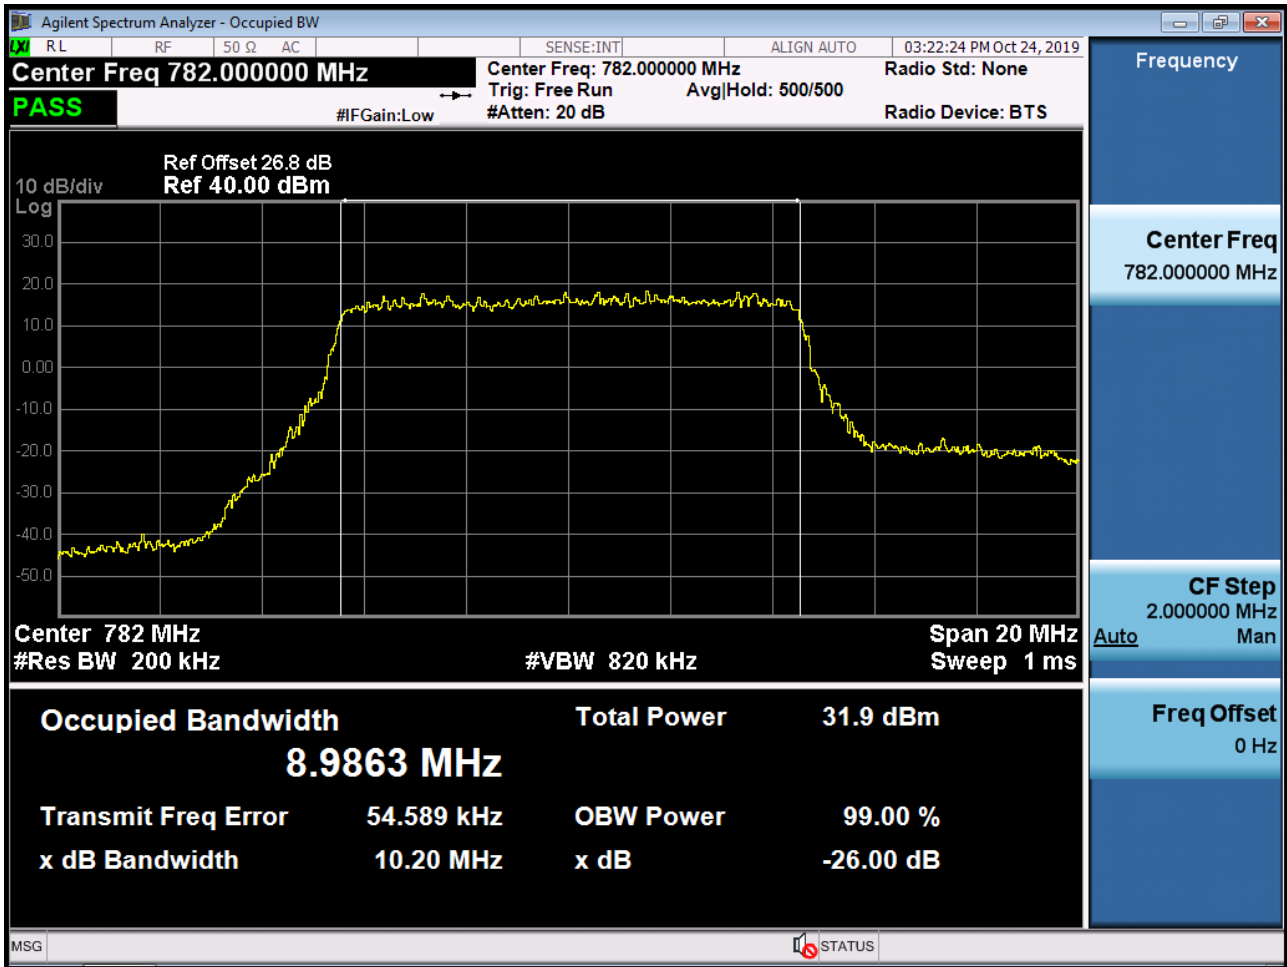


BAND 13. Occupied Bandwidth Plot (Ch.23230 16-QAM RB 50) 10 MHz

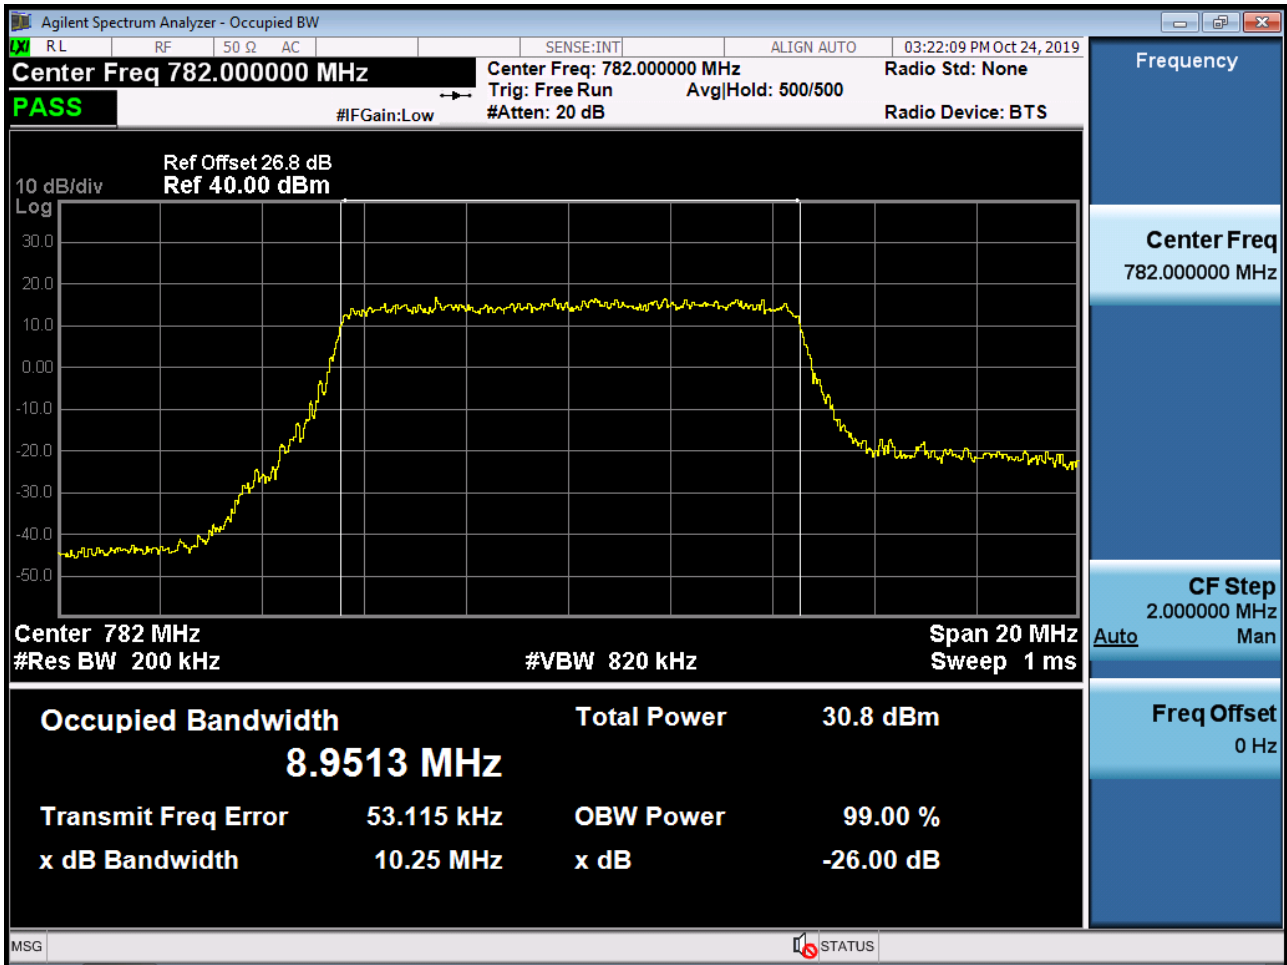

BAND 13. Occupied Bandwidth Plot (Ch.23230 64-QAM RB 50) 10 MHz

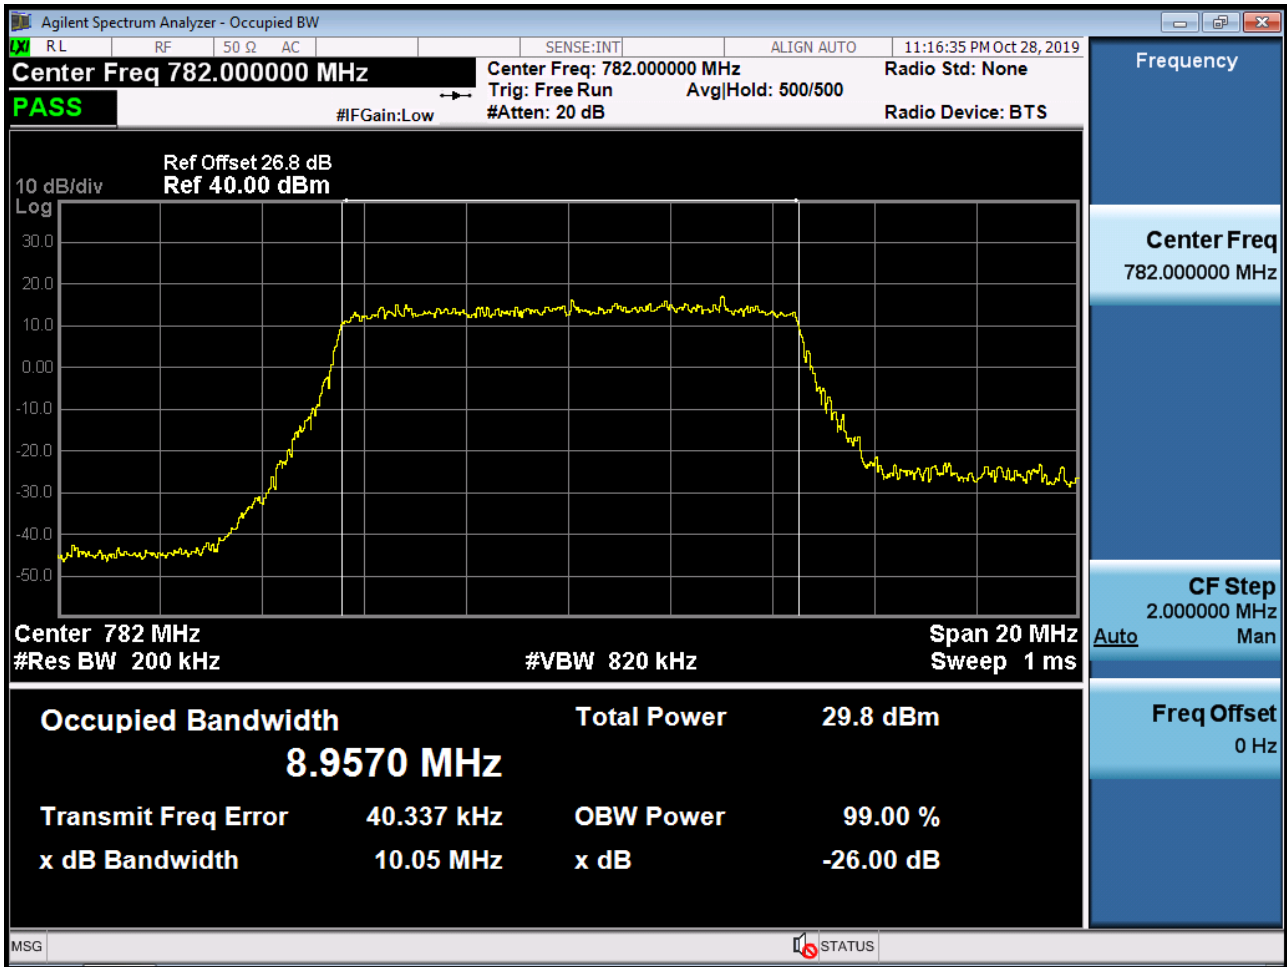


Band 13 Lower Band Edge Plot (5M BW Ch.23205 QPSK\_RB1 OFFSET\_0)

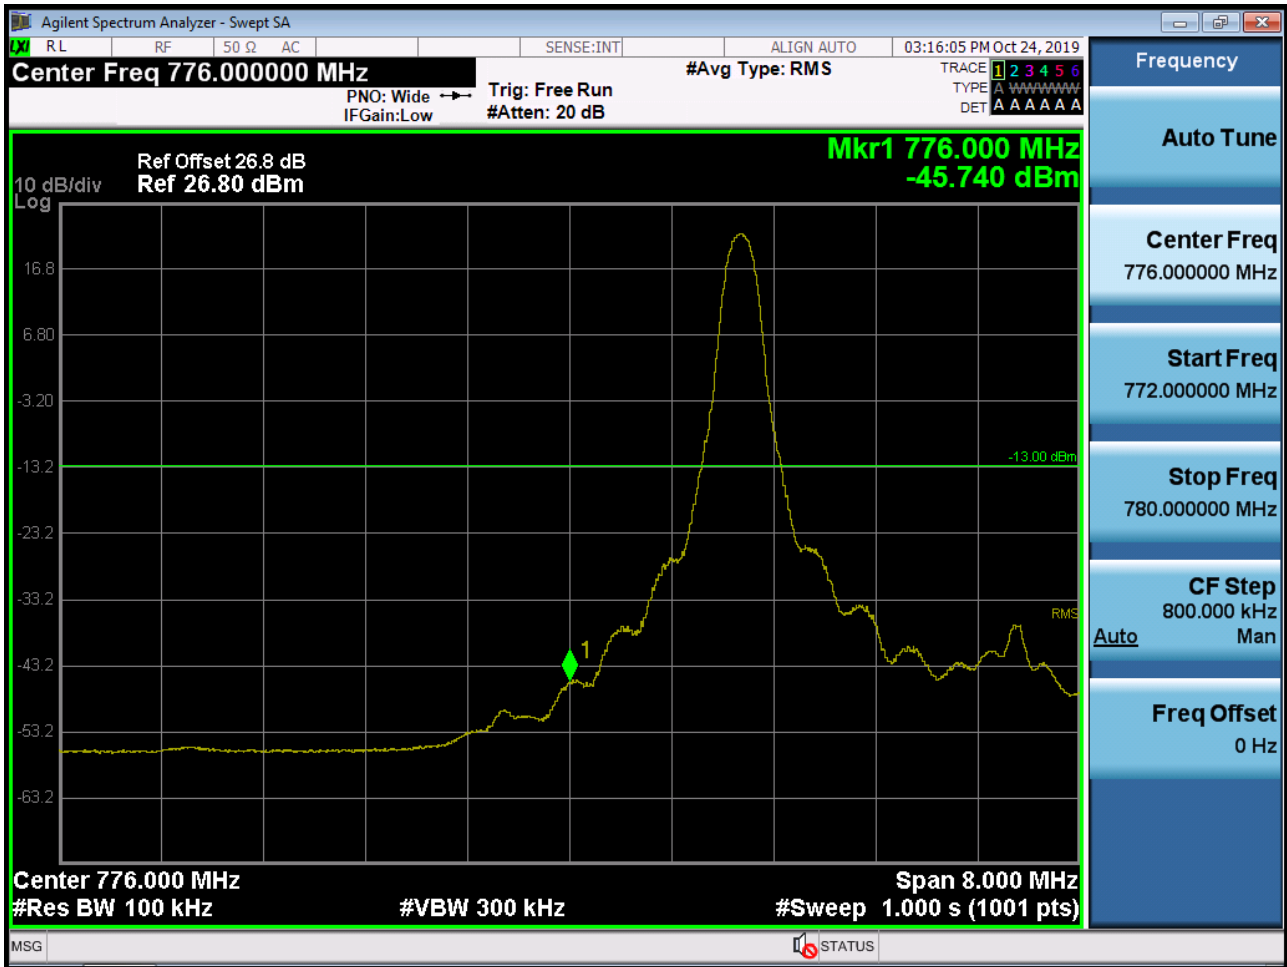


Band 13 Lower Band Edge Plot (5M BW Ch.23205 QPSK\_RB\_25)



Band 13 Lower Emission Mask (763 MHz ~ 775 MHz) Plot (5M BW Ch.23205 QPSK\_RB25\_0)

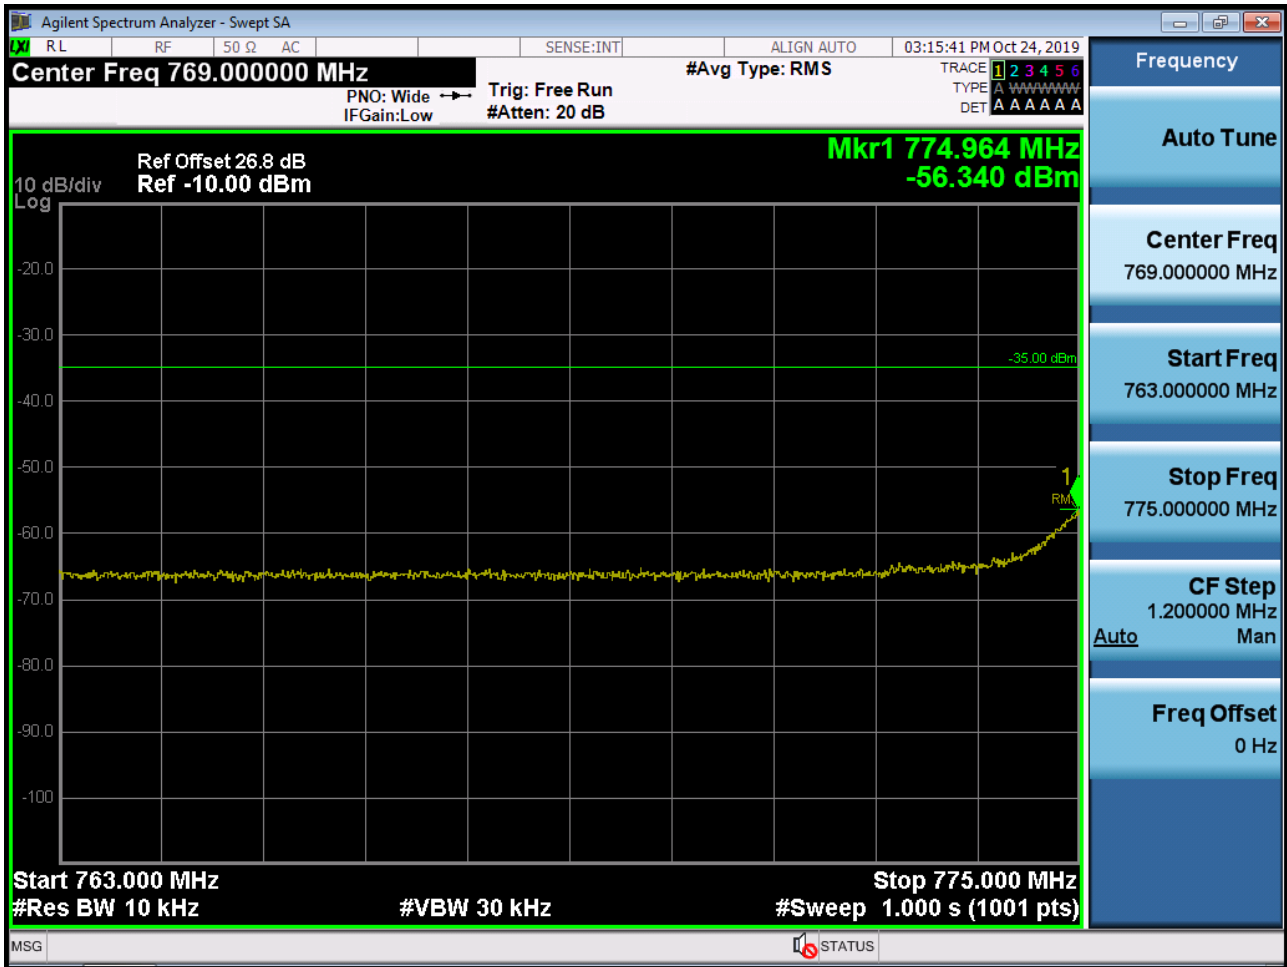


Band 13 Lower Band Edge Plot (10M BW Ch.23230 QPSK\_RB1 OFFSET\_0)

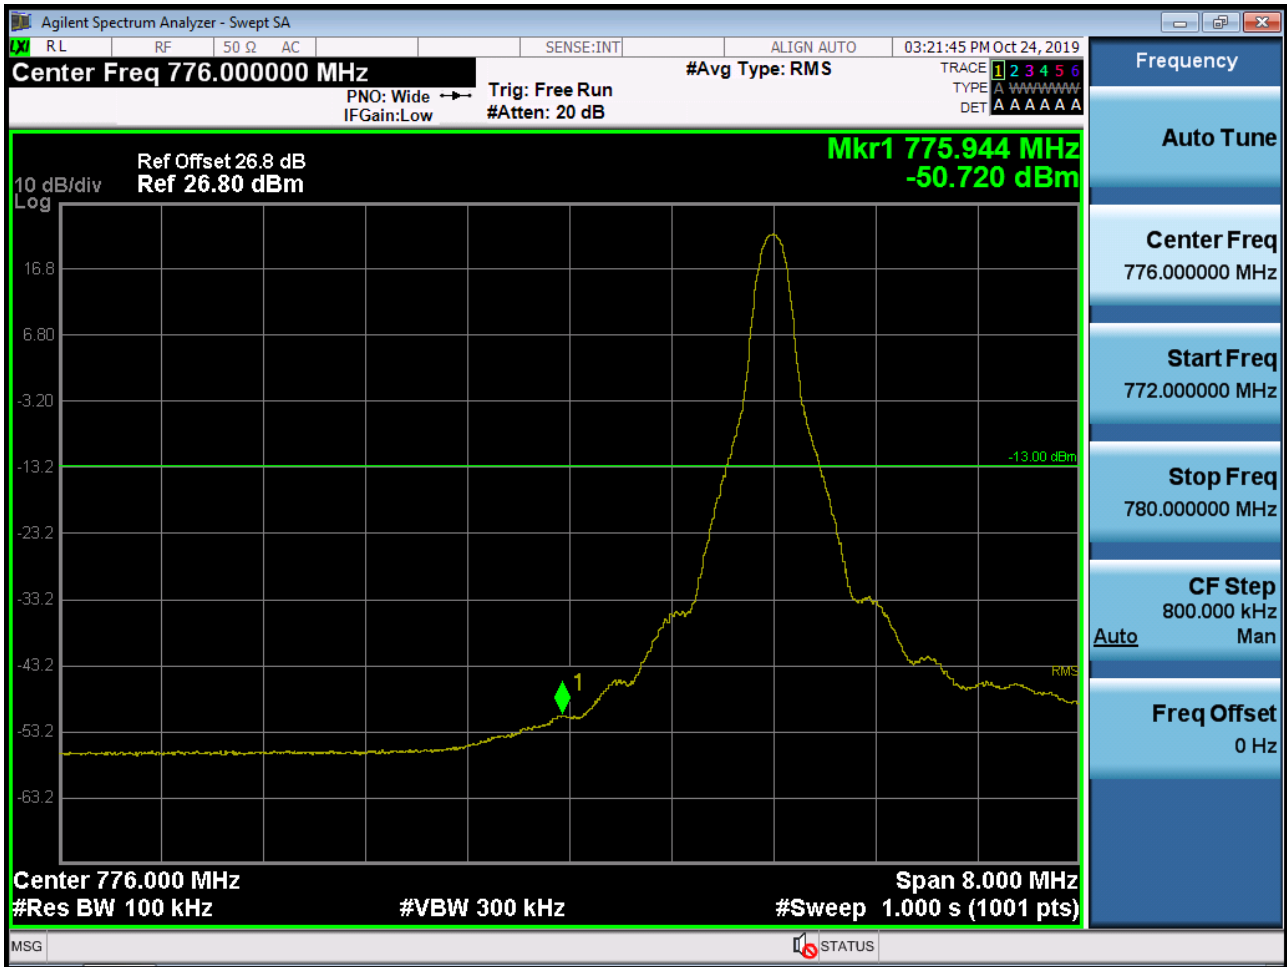


BAND 13. Lower & Upper Band Edge Plot (10M BW Ch.23230 QPSK RB\_50)



Band 13 Lower Emission Mask (763 MHz ~ 775 MHz) Plot (10M BW Ch.23230 QPSK\_RB50\_0)

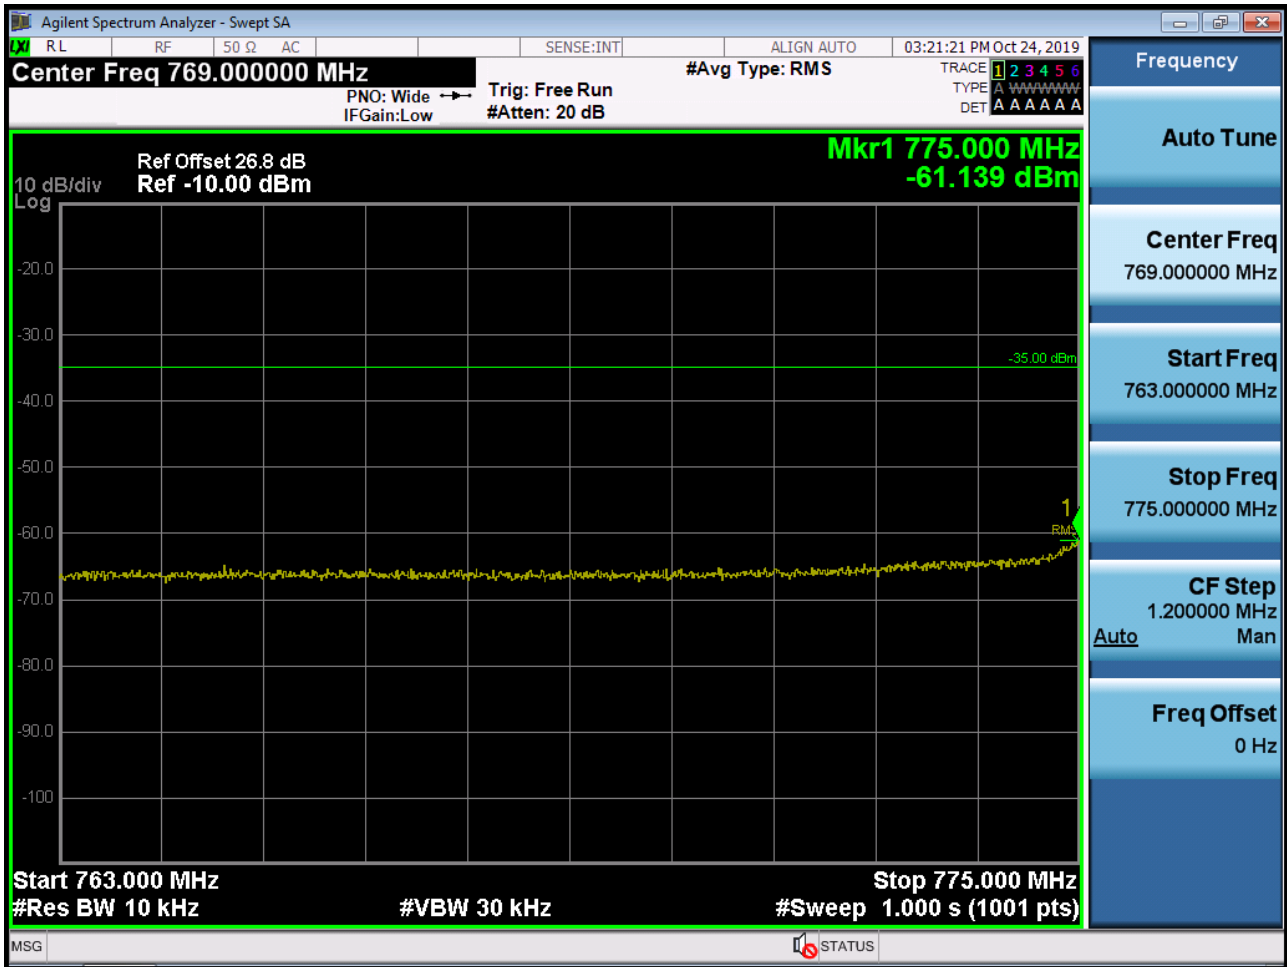


Band 13 Upper Band Edge Plot (5M BW Ch.23255 QPSK\_RB1\_Offset 24)

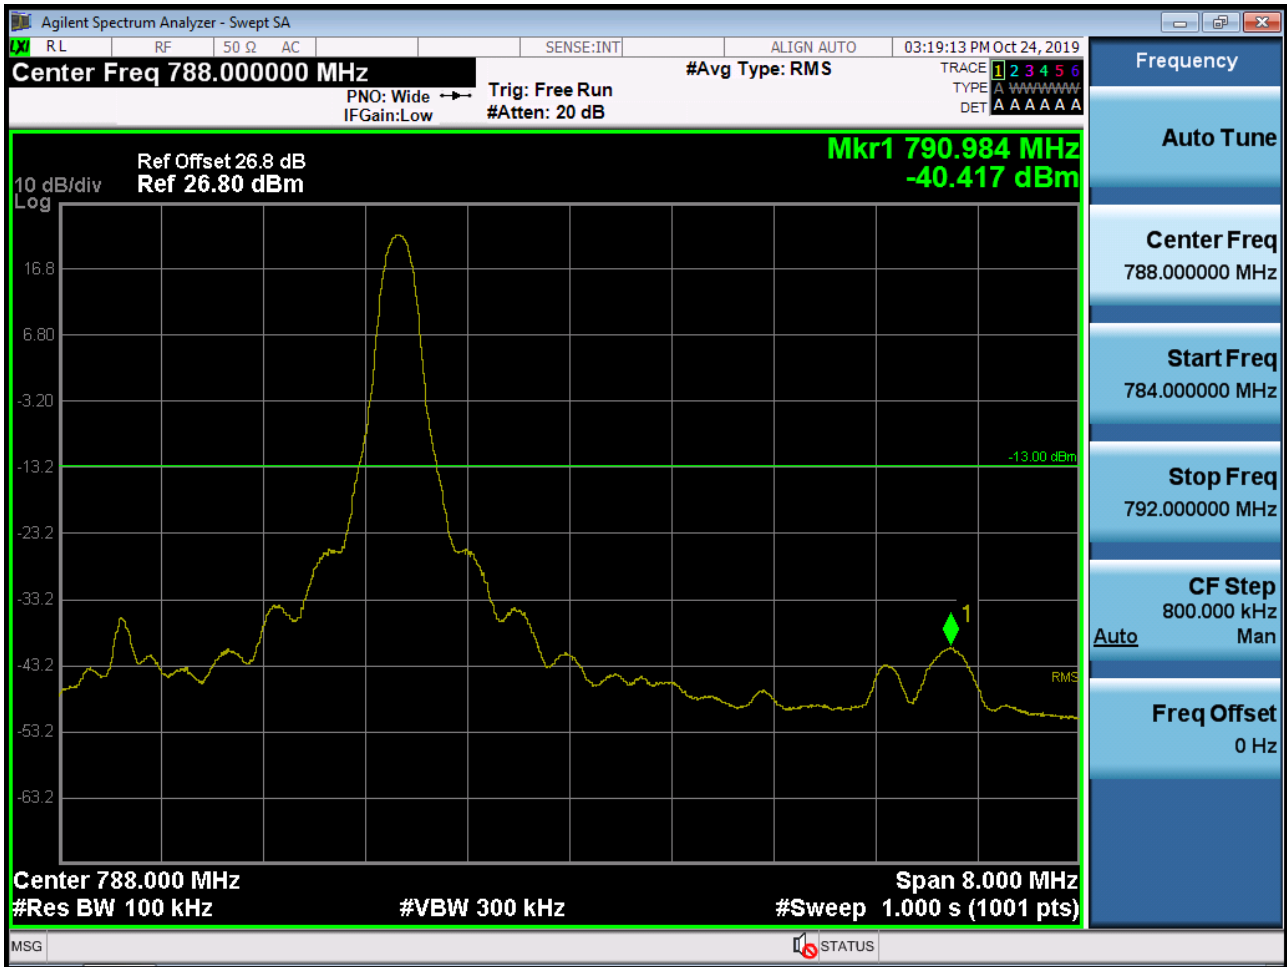


Band 13 Upper Band Edge Plot (5M BW Ch.23255 QPSK\_RB\_25)



Band 13 Upper Emission Mask (793 MHz ~805 MHz) Plot (5M BW Ch.23255 QPSK\_RB25\_0)

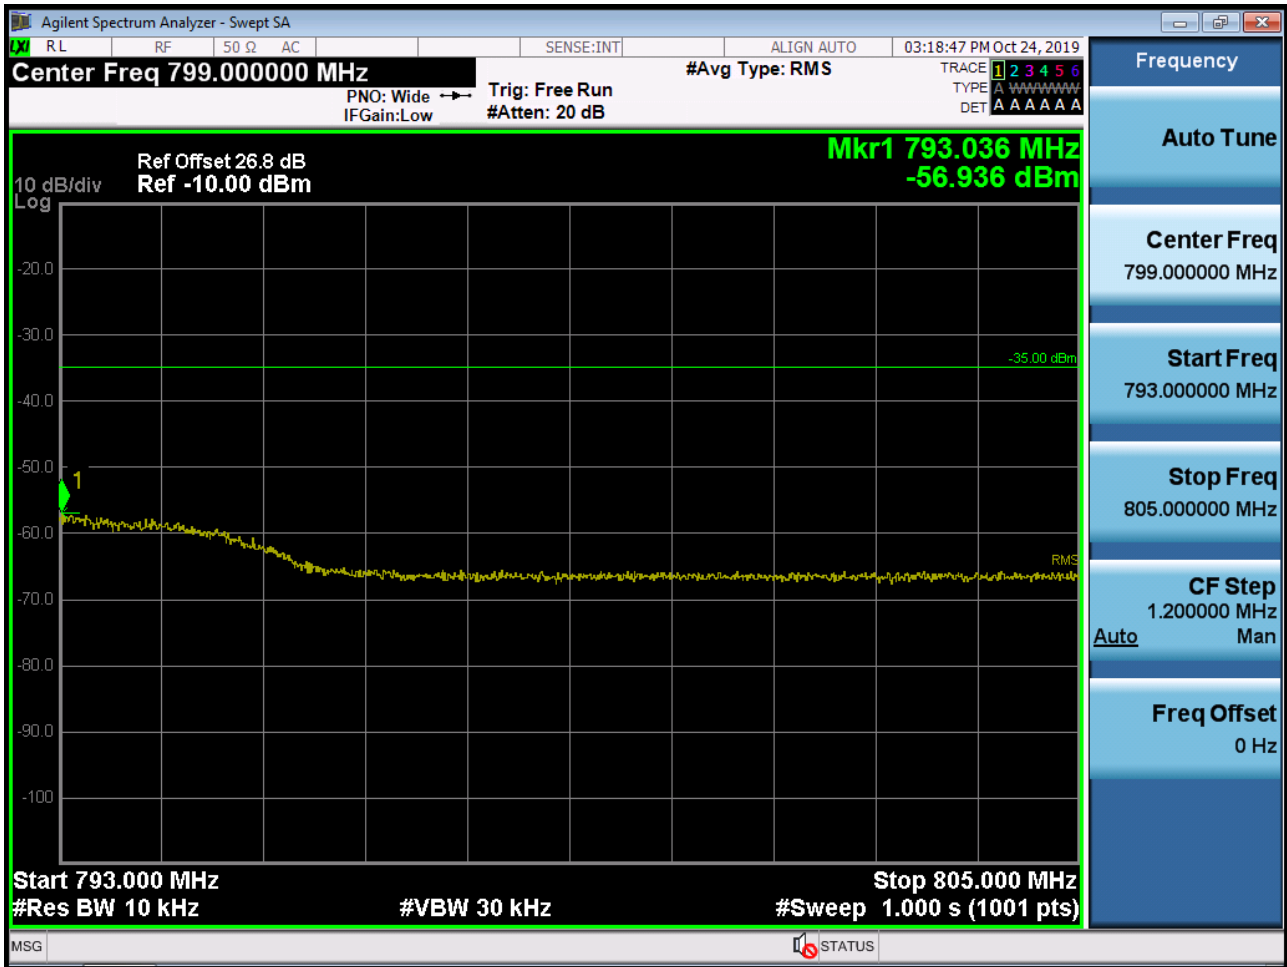

Band 13 Upper Band Edge Plot (10M BW Ch.23230 QPSK\_RB1\_Offset\_49)

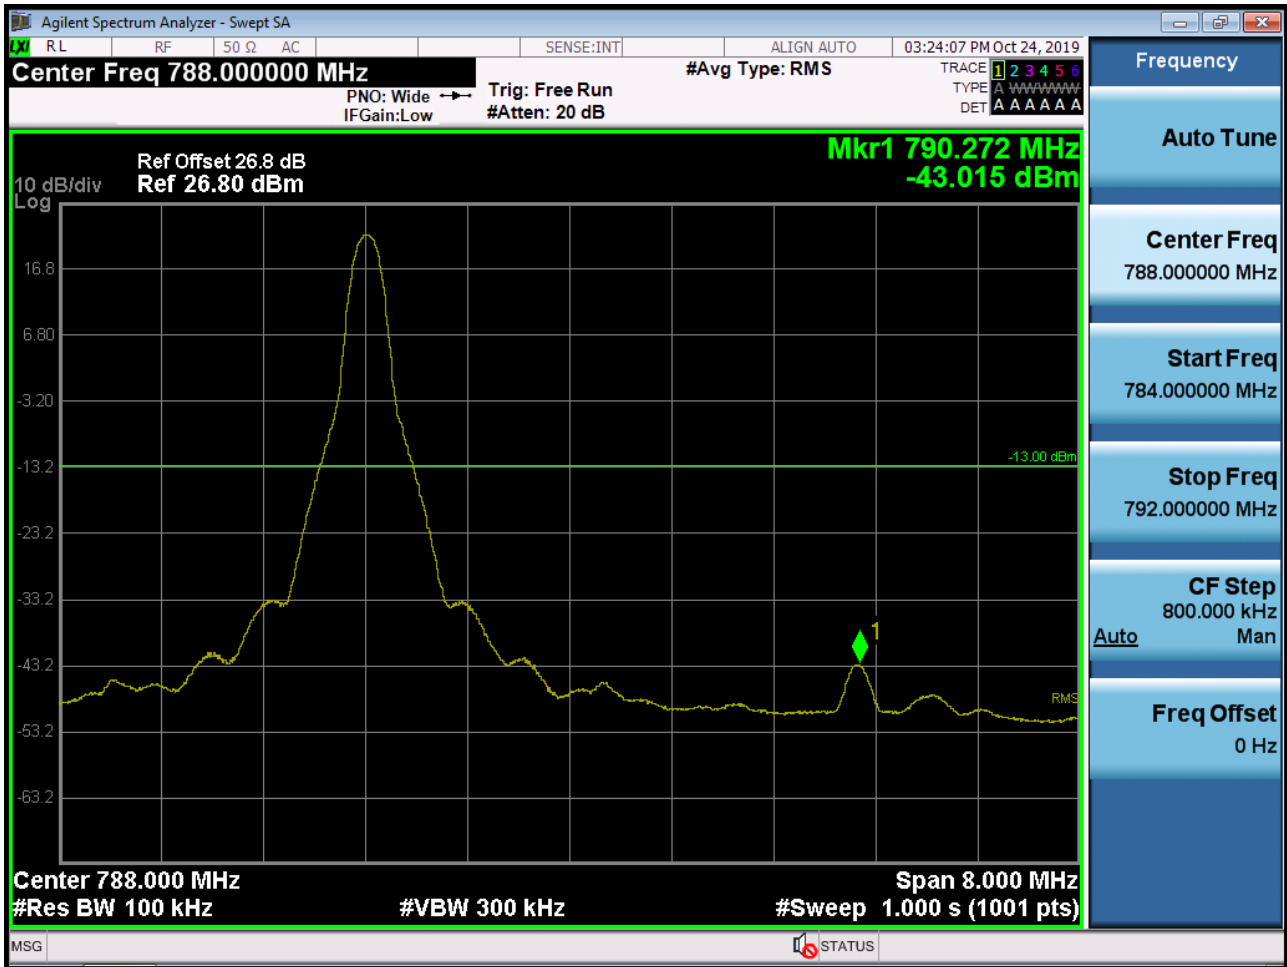


Band 13 Upper Band Edge Plot (10M BW Ch.23230 QPSK\_ QPSK\_RB\_50)




Band 13 Upper Emission Mask (793 MHz ~805 MHz) Plot (10M BW Ch.23230 QPSK\_RB50\_0)




BAND 13. Conducted Spurious Plot (23205ch\_5MHz\_QPSK\_RB 1\_0)

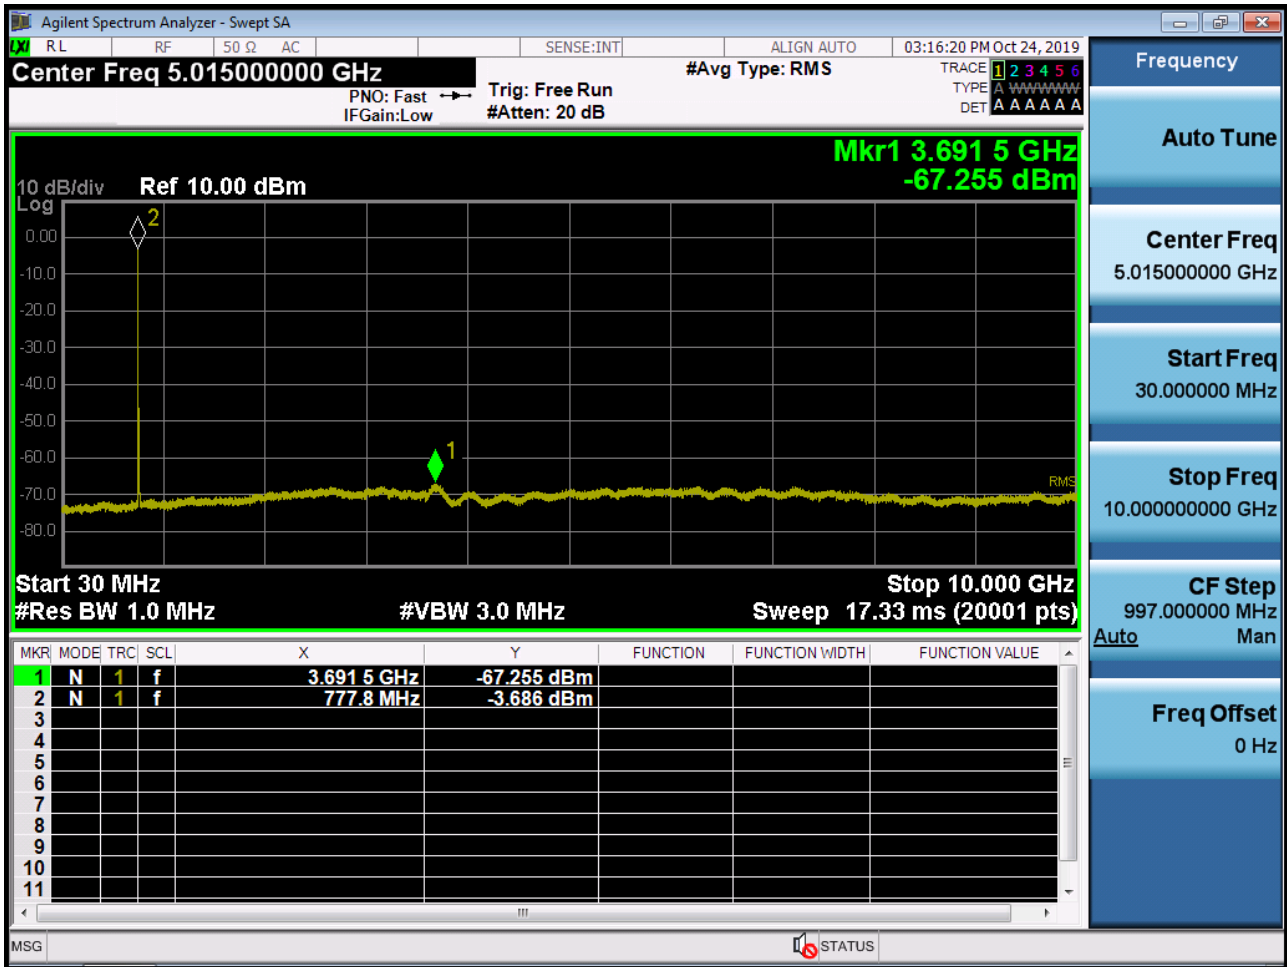


BAND 13. Conducted Spurious Plot (23230ch\_5MHz\_QPSK\_RB 1\_0)

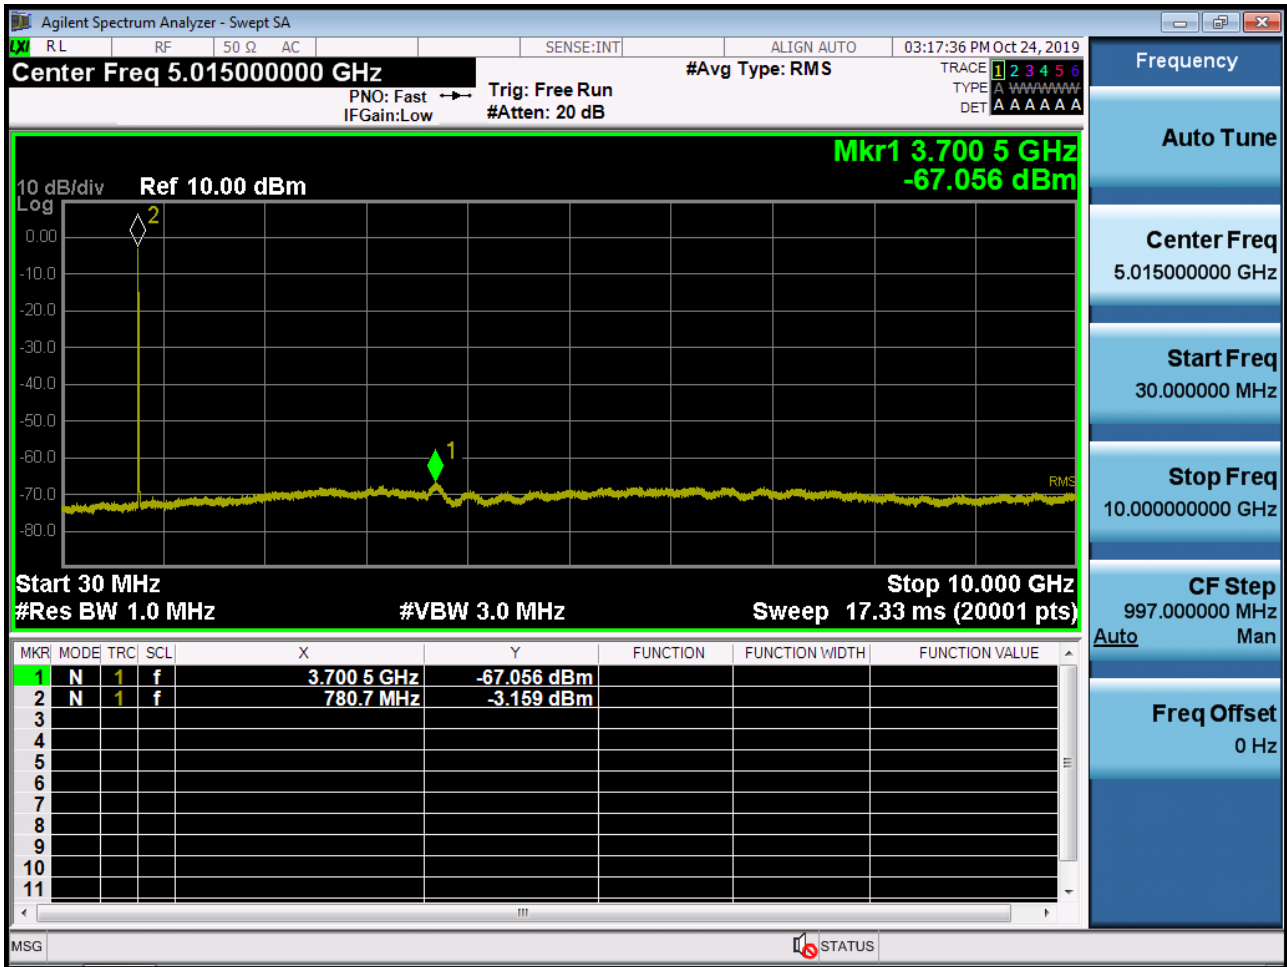

BAND 13. Conducted Spurious Plot (23255ch\_5MHz\_QPSK\_RB 1\_0)

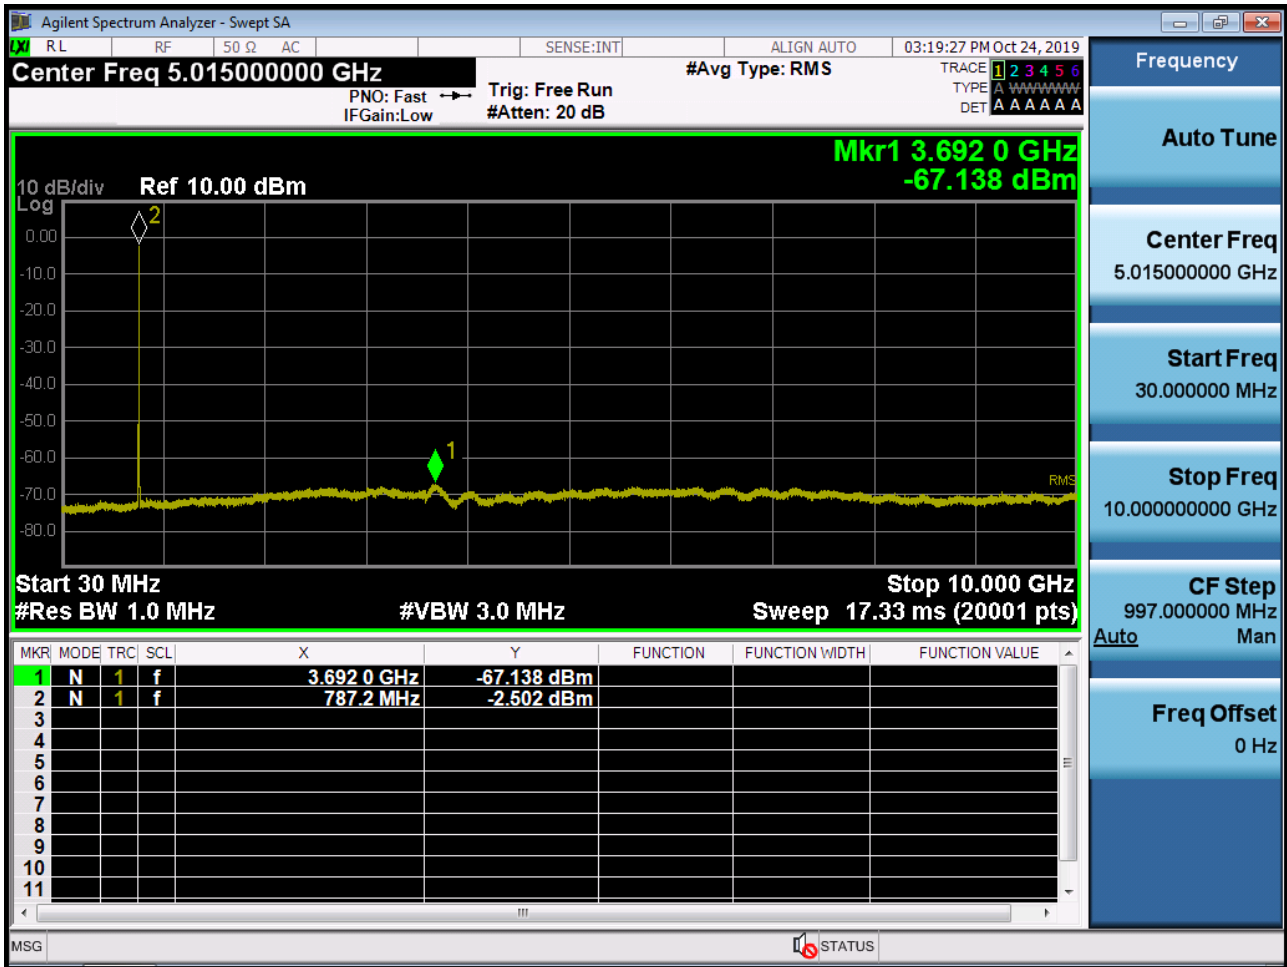

BAND 13. Conducted Spurious Plot (Ch.23230 10 MHz QPSK RB 1, Offset 0)

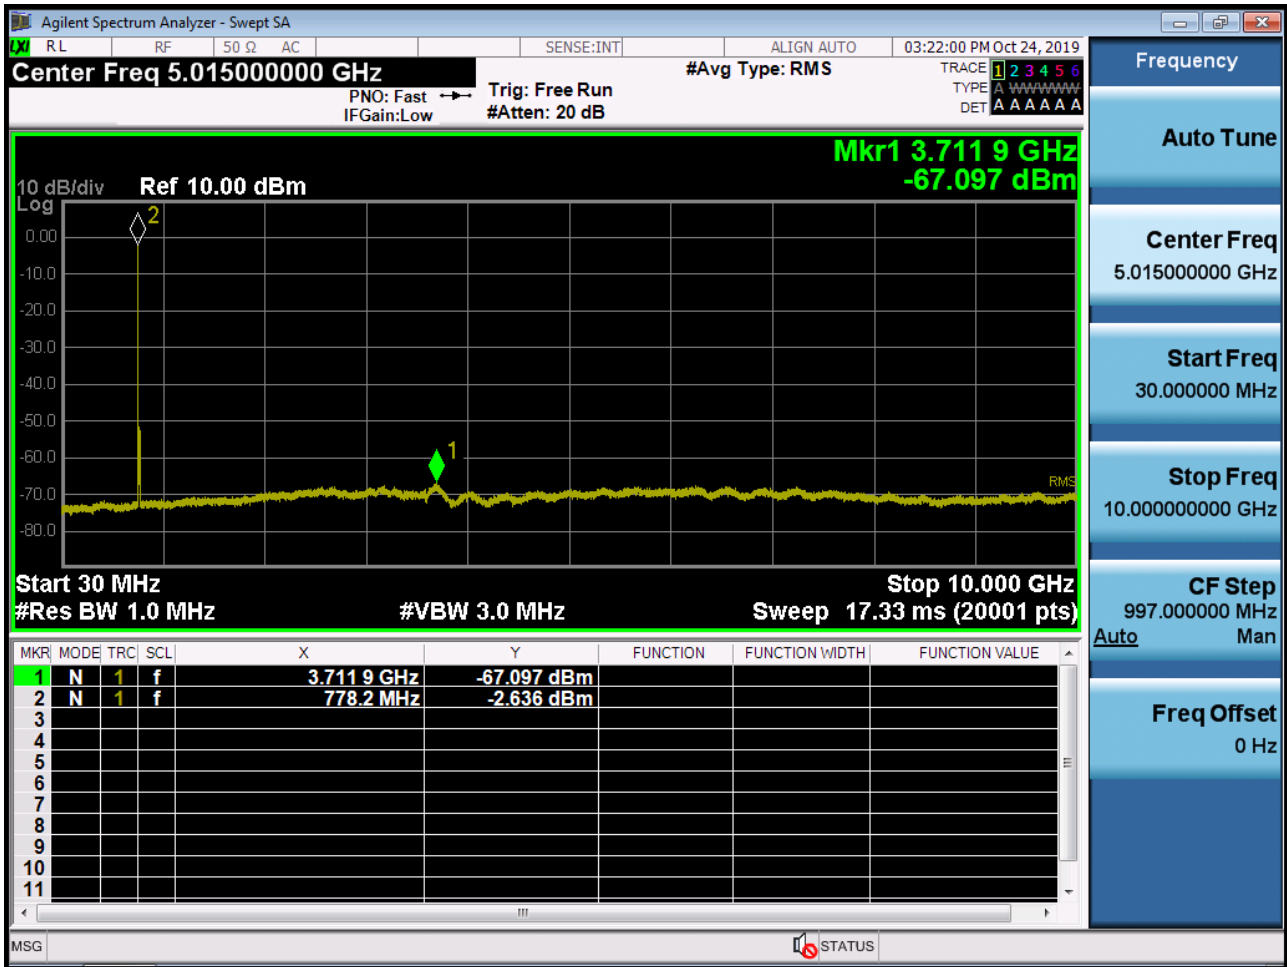

## 10. APPENDIX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1912-FI013-P