


### AUTHORIZED BANDEGE (HIGH CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

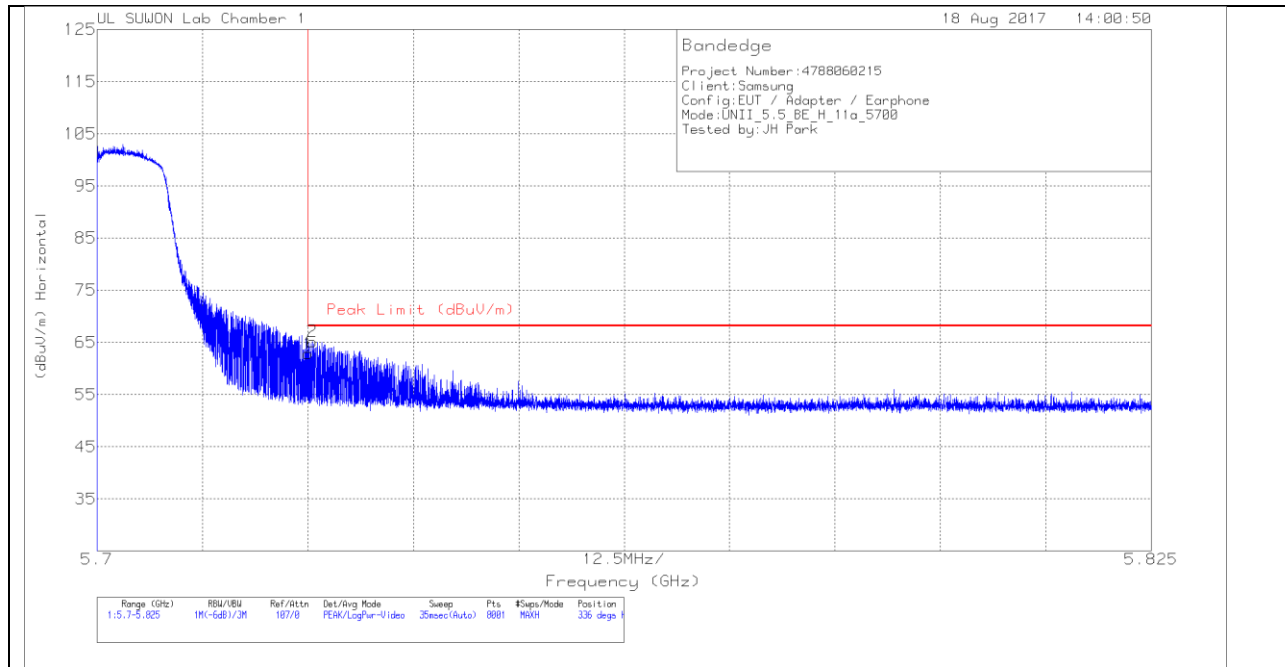


#### HORIZONTAL DATA

##### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	10dB_ATT(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	49.63	Pk	34.4	-21.2	0	62.83	68.2	-5.37	336	116	H
2	5.726	51.97	Pk	34.4	-21.2	0	65.17	68.2	-3.03	336	116	H

Pk - Peak detector

**VERTICAL PEAK AND AVERAGE PLOT**

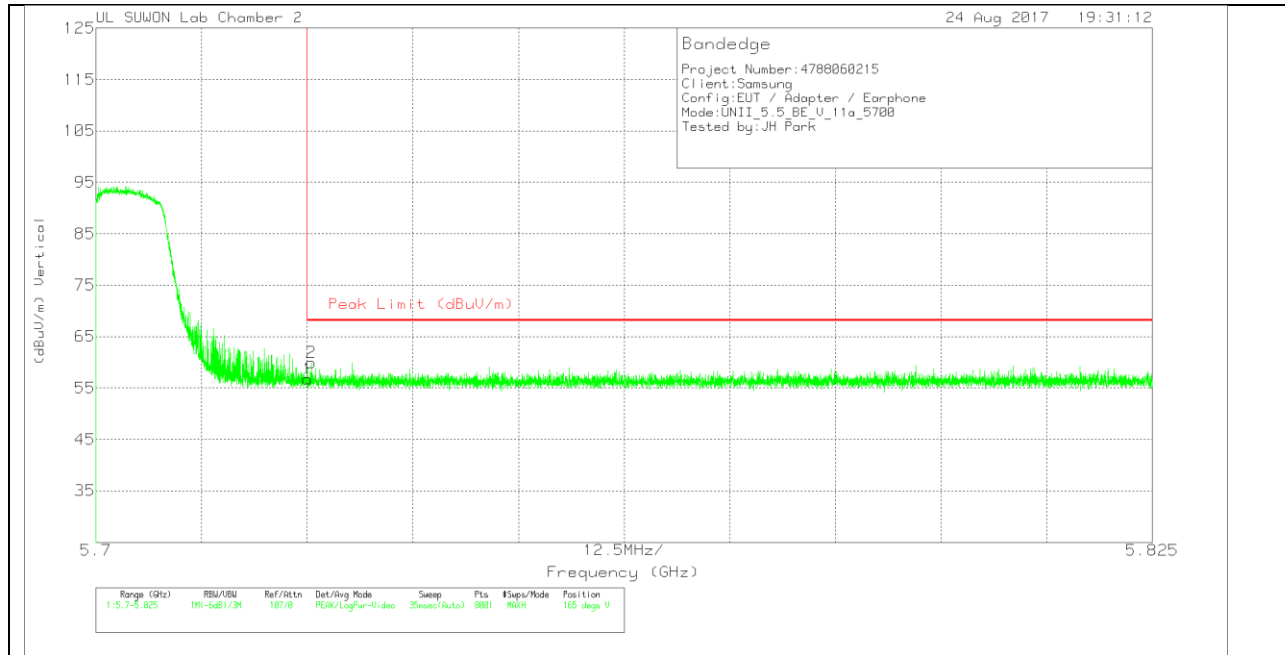

**VERTICAL DATA**


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_31 17[001687 24]	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	36.82	Pk	34.4	-14.5	0	56.72	68.2	-11.48	165	238	V
2	5.726	40.03	Pk	34.4	-14.5	0	59.93	68.2	-8.27	165	238	V


Pk - Peak detector

## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

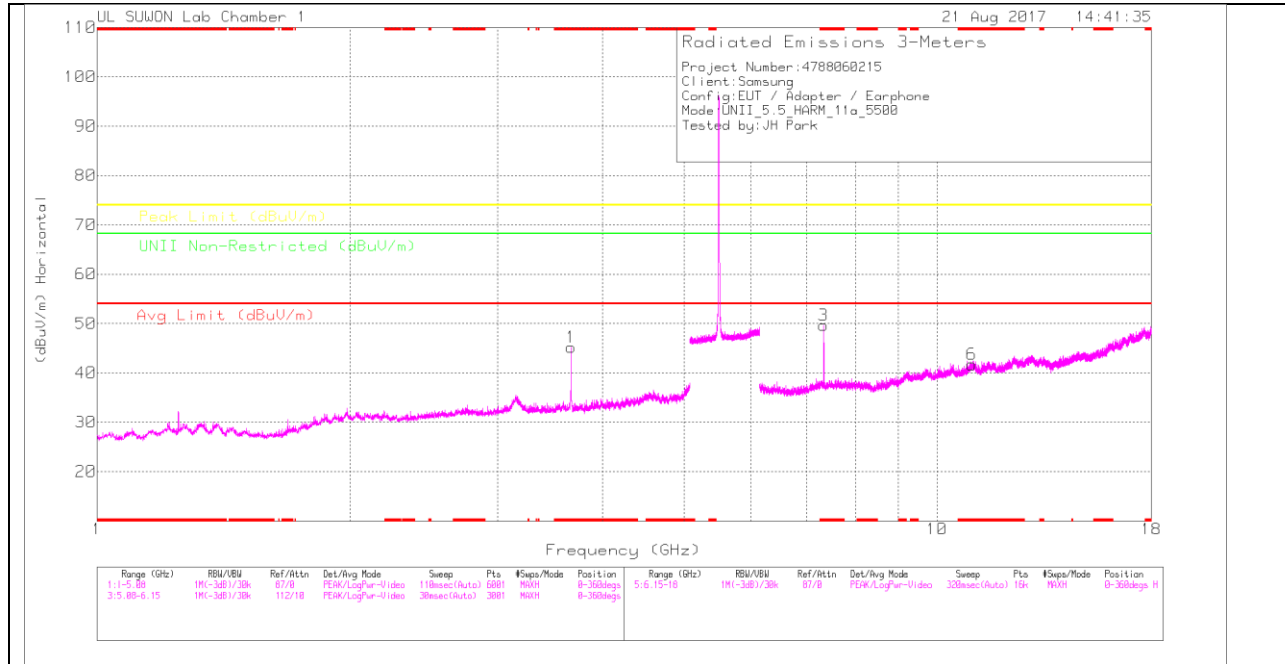

### LOW CHANNEL VERTICAL

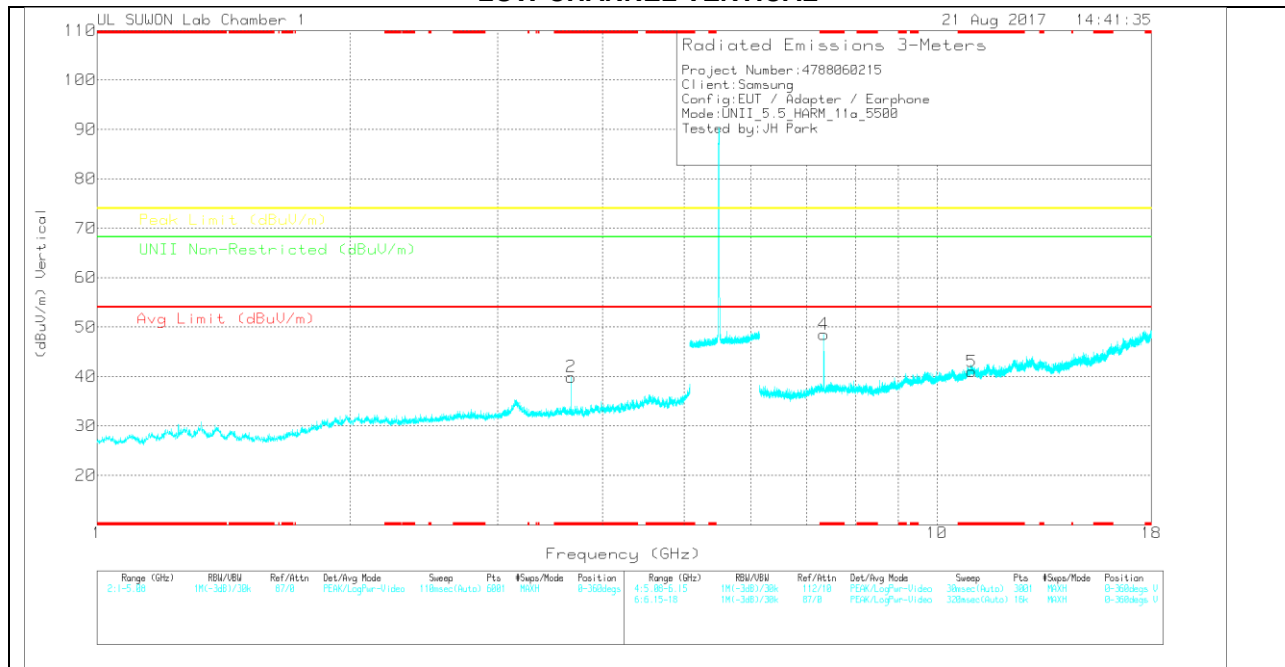

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	5GHz_LP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.667	44.7	PK	32.7	-32.2	0	45.2	-	-	74	-28.8	-	-	0-360	150	H
2	* 3.667	39.41	PK	32.7	-32.2	0	39.91	-	-	74	-34.09	-	-	0-360	250	V
3	* 7.333	41.16	PK	35.9	-27.4	0	49.66	-	-	74	-24.34	-	-	0-360	250	H
6	* 11.004	25.72	PK	38	-22	0	41.72	-	-	74	-32.28	-	-	0-360	150	H
4	* 7.333	40.03	PK	35.9	-27.4	0	48.53	-	-	74	-25.47	-	-	0-360	150	V
5	* 11.002	24.99	PK	38	-22	0	40.99	-	-	74	-33.01	-	-	0-360	150	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

**Radiated Emissions**


Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	5GHz_LP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.667	50.23	PK-U	32.7	-32.2	0	50.73	-	-	74	-23.27	-	-	360	113	H
* 3.667	44.56	ADR	32.7	-32.2	0	45.06	54	-8.94	-	-	-	-	360	113	H
* 3.667	46.98	PK-U	32.7	-32.2	0	47.48	-	-	74	-26.52	-	-	64	139	V
* 3.667	38.75	ADR	32.7	-32.2	0	39.25	54	-14.75	-	-	-	-	64	139	V
* 7.333	39.05	ADR	35.9	-27.4	0	47.55	54	-6.45	-	-	-	-	208	137	V
* 7.333	40.12	ADR	35.9	-27.4	0	48.62	54	-5.38	-	-	-	-	357	119	H
* 7.333	44.8	PK-U	35.9	-27.4	0	53.3	-	-	74	-20.7	-	-	208	137	V
* 7.333	45.48	PK-U	35.9	-27.4	0	53.98	-	-	74	-20.02	-	-	357	119	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**MID CHANNEL HORIZONTAL**

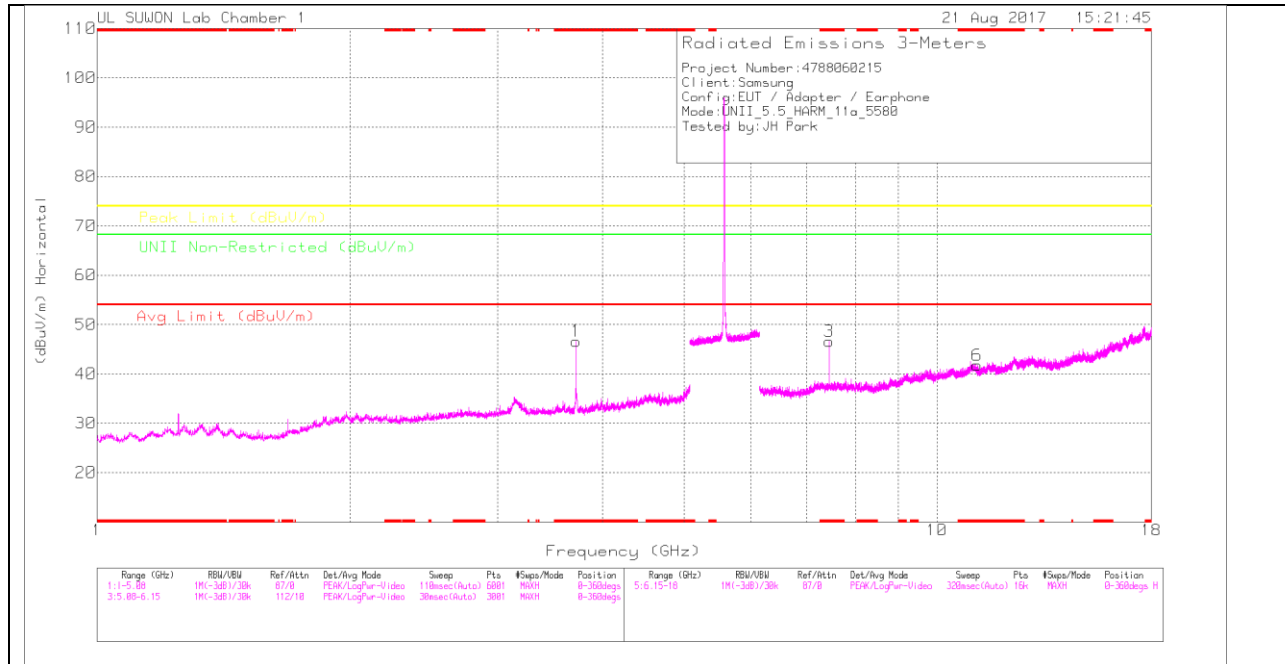

**MID CHANNEL VERTICAL**

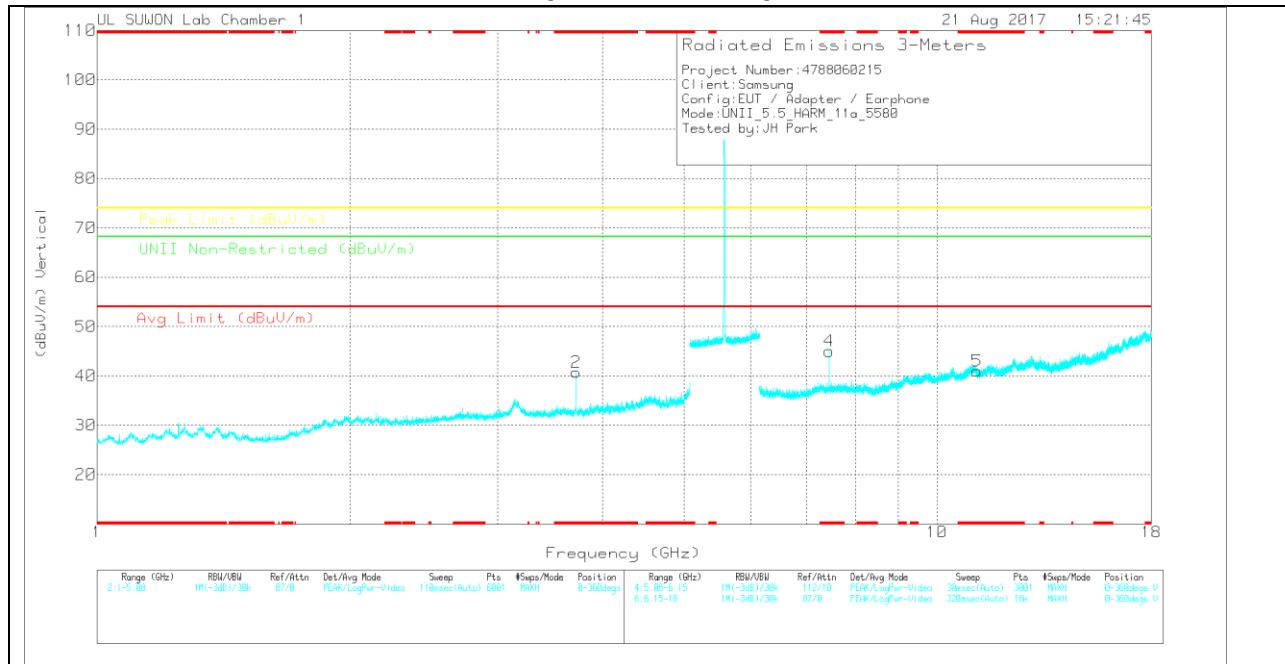

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	5GHz_LP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.72	46.55	PK	32.7	-32.6	0	46.65	-	-	74	-27.35	-	-	0-360	150	H
2	* 3.72	40.64	PK	32.7	-32.6	0	40.74	-	-	74	-33.26	-	-	0-360	250	V
3	* 7.44	38.27	PK	35.9	-27.6	0	46.57	-	-	74	-27.43	-	-	0-360	250	H
6	* 11.164	26.55	PK	37.9	-22.7	0	41.75	-	-	74	-32.25	-	-	0-360	250	H
4	* 7.44	36.72	PK	35.9	-27.6	0	45.02	-	-	74	-28.98	-	-	0-360	150	V
5	* 11.161	25.78	PK	37.9	-22.7	0	40.98	-	-	74	-33.02	-	-	0-360	250	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	5GHz_LP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.72	53.13	PK-U	32.7	-32.6	0	53.23	-	-	74	-20.77	-	-	7	101	H
* 3.72	47.56	ADR	32.7	-32.6	0	47.66	54	-6.34	-	-	-	-	7	101	H
* 3.72	47.58	PK-U	32.7	-32.6	0	47.68	-	-	74	-26.32	-	-	62	114	V
* 3.72	40.27	ADR	32.7	-32.6	0	40.37	54	-13.63	-	-	-	-	62	114	V
* 7.44	36.04	ADR	35.9	-27.6	0	44.34	54	-9.66	-	-	-	-	211	155	V
* 7.44	39.54	ADR	35.9	-27.6	0	47.84	54	-6.16	-	-	-	-	347	325	H
* 7.44	43.5	PK-U	35.9	-27.6	0	51.8	-	-	74	-22.2	-	-	211	155	V
* 7.44	45.55	PK-U	35.9	-27.6	0	53.85	-	-	74	-20.15	-	-	347	325	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

### HIGH CHANNEL HORIZONTAL

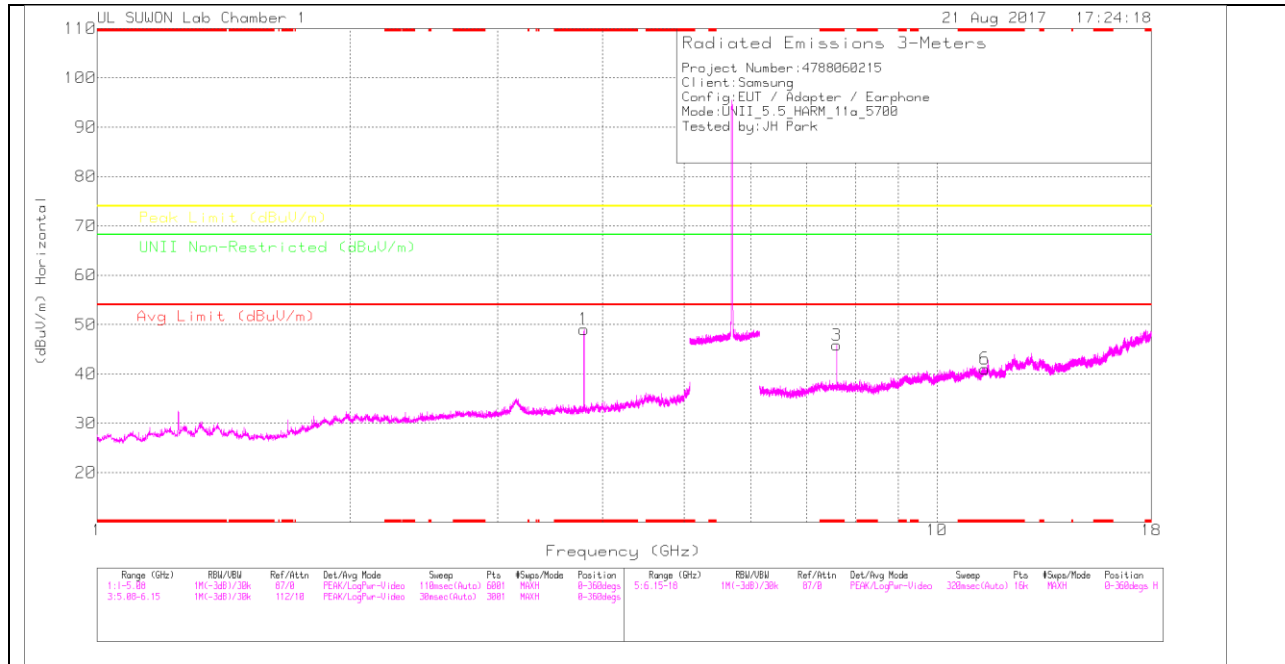

### HIGH CHANNEL VERTICAL

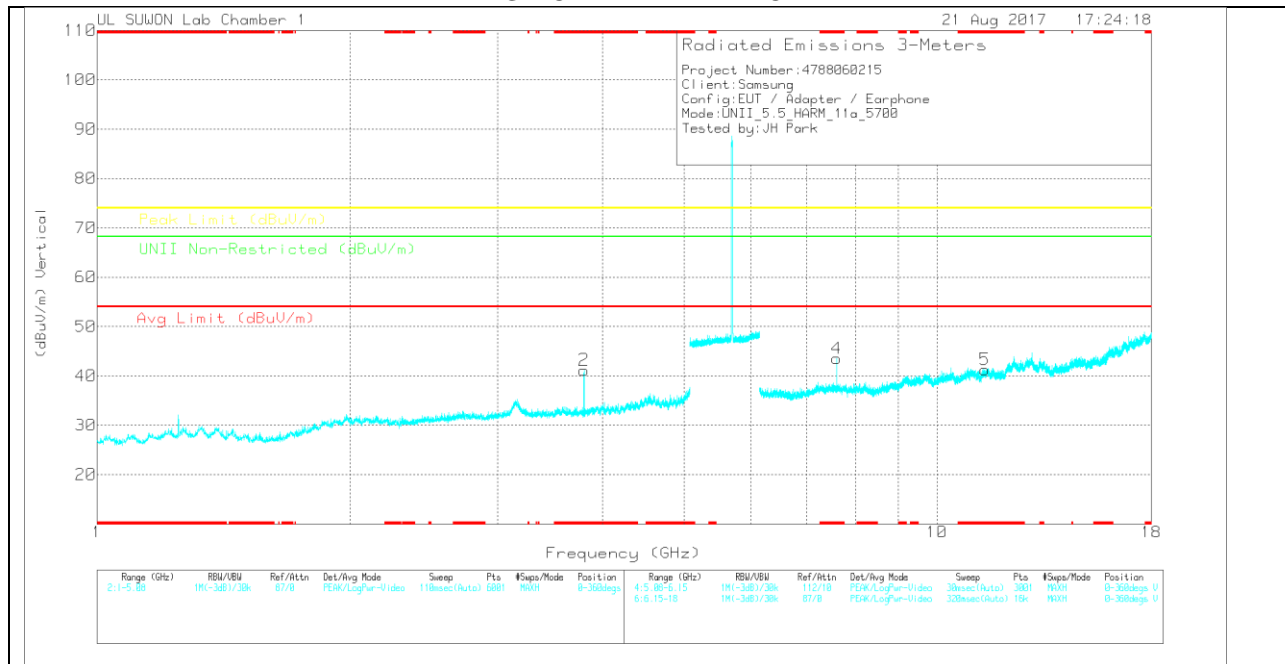

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_0016 8717	5GHz_LP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.8	49.06	PK	33	-33	0	49.06	-	-	74	-24.94	-	-	0-360	150	H
2	* 3.8	41.16	PK	33	-33	0	41.16	-	-	74	-32.84	-	-	0-360	149	V
3	* 7.599	36.93	PK	35.8	-26.9	0	45.83	-	-	74	-28.17	-	-	0-360	250	H
6	* 11.401	25.63	PK	38.1	-22.7	0	41.03	-	-	74	-32.97	-	-	0-360	250	H
4	* 7.599	34.63	PK	35.8	-26.9	0	43.53	-	-	74	-30.47	-	-	0-360	150	V
5	* 11.404	25.88	PK	38.1	-22.7	0	41.28	-	-	74	-32.72	-	-	0-360	250	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	5GHz_LP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.8	54.09	PK-U	33	-33	0	54.09	-	-	74	-19.91	-	-	3	352	H
* 3.8	50.74	ADR	33	-33	0	50.74	54	-3.26	-	-	-	-	3	352	H
* 3.8	51.23	PK-U	33	-33	0	51.23	-	-	74	-22.77	-	-	259	378	V
* 3.8	46.72	ADR	33	-33	0	46.72	54	-7.28	-	-	-	-	259	378	V
* 7.6	34.09	ADR	35.8	-26.9	0	42.99	54	-11.01	-	-	-	-	214	148	V
* 7.6	37.17	ADR	35.8	-26.9	0	46.07	54	-7.93	-	-	-	-	346	336	H
* 7.6	41.96	PK-U	35.8	-26.9	0	50.86	-	-	74	-23.14	-	-	214	148	V
* 7.6	43.48	PK-U	35.8	-26.9	0	52.38	-	-	74	-21.62	-	-	346	336	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**STRADDLE CHANNEL HORIZONTAL**

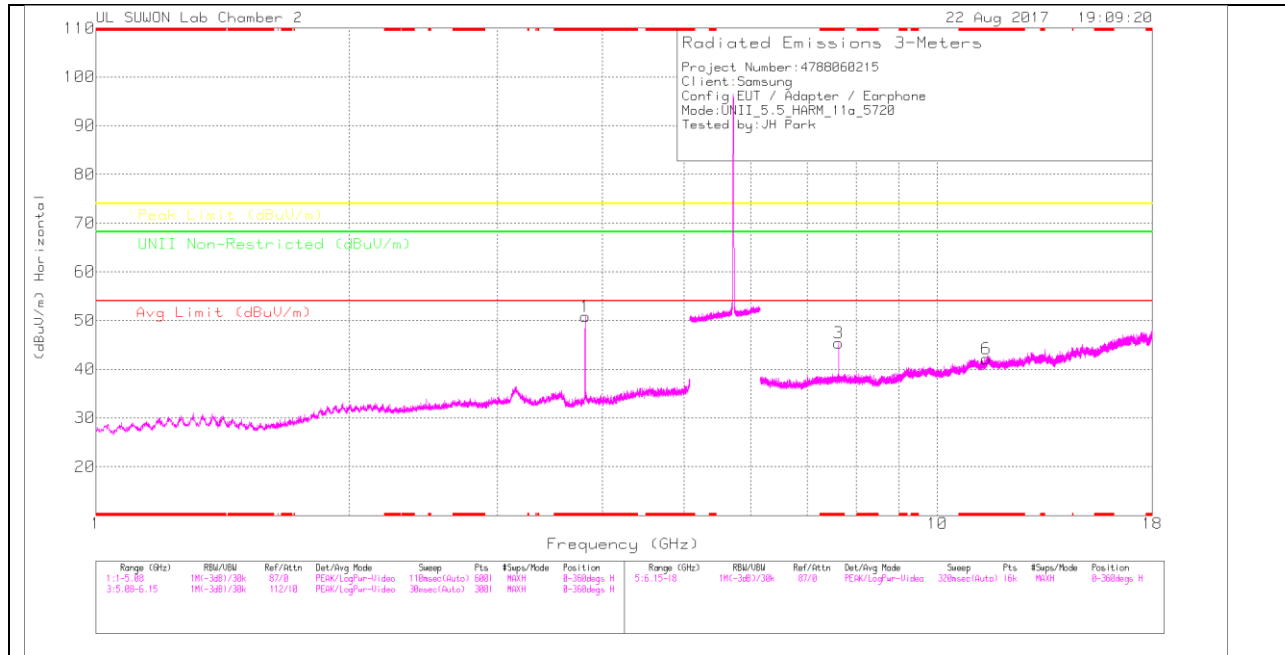

**STRADDLE CHANNEL VERTICAL**

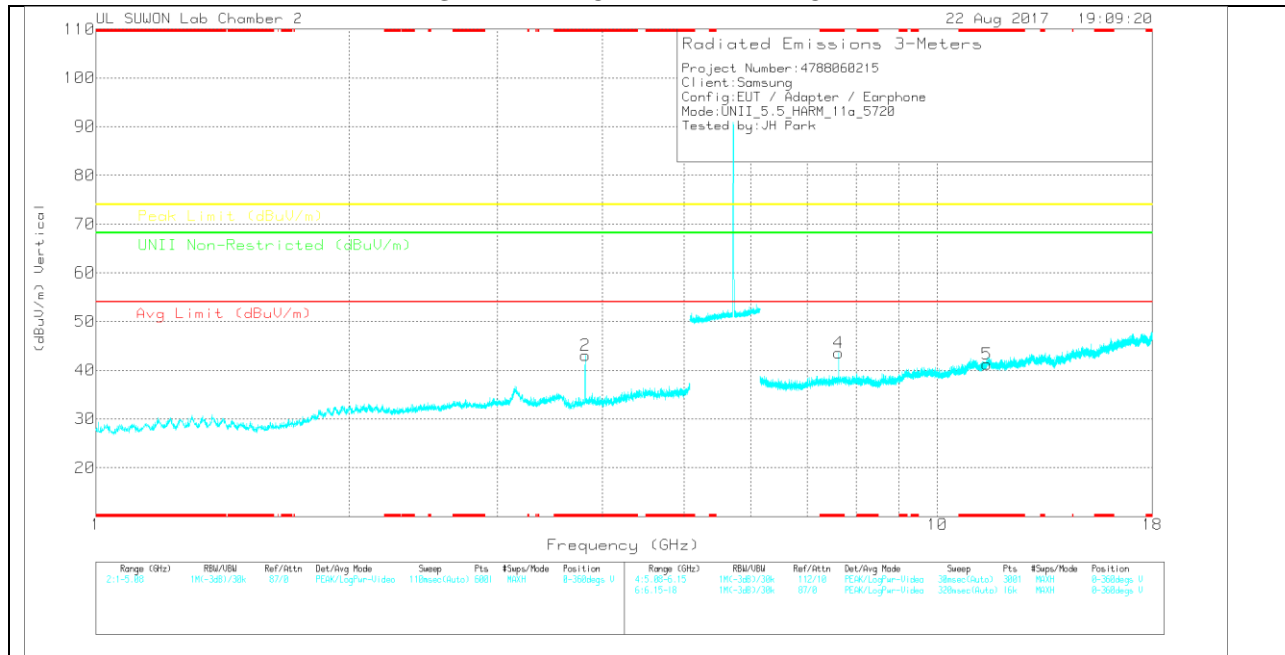

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**STRADDLE CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_31 171001687 24]	5GHz_LP[d B]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.813	43.1	PK	33	-25.3	0	50.8	-	-	74	-23.2	-	-	0-360	150	H
2	* 3.813	35.4	PK	33	-25.3	0	43.1	-	-	74	-30.9	-	-	0-360	250	V
3	* 7.626	29.87	PK	35.8	-20.3	0	45.37	-	-	74	-28.63	-	-	0-360	250	H
6	* 11.437	19.88	PK	38.1	-15.9	0	42.08	-	-	74	-31.92	-	-	0-360	150	H
4	* 7.626	28.03	PK	35.8	-20.3	0	43.53	-	-	74	-30.47	-	-	0-360	150	V
5	* 11.441	19.05	PK	38.1	-15.9	0	41.25	-	-	74	-32.75	-	-	0-360	250	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117 [00168724]	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.813	46.1	PK-U	33	-25.3	0	53.8	-	-	74	-20.2	-	-	0	162	H
* 3.813	41.19	ADR	33	-25.3	0	48.89	54	-5.11	-	-	-	-	0	162	H
* 3.813	40.94	PK-U	33	-25.3	0	48.64	-	-	74	-25.36	-	-	73	366	V
* 3.813	34.49	ADR	33	-25.3	0	42.19	54	-11.81	-	-	-	-	73	366	V
* 7.627	29.05	ADR	35.8	-20.3	0	44.55	54	-9.45	-	-	-	-	344	348	H
* 7.627	26.74	ADR	35.8	-20.3	0	42.24	54	-11.76	-	-	-	-	144	133	V
* 7.626	36.92	PK-U	35.8	-20.3	0	52.42	-	-	74	-21.58	-	-	344	348	H
* 7.627	36.12	PK-U	35.8	-20.3	0	51.62	-	-	74	-22.38	-	-	144	133	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

### 10.3.2. TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.5GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

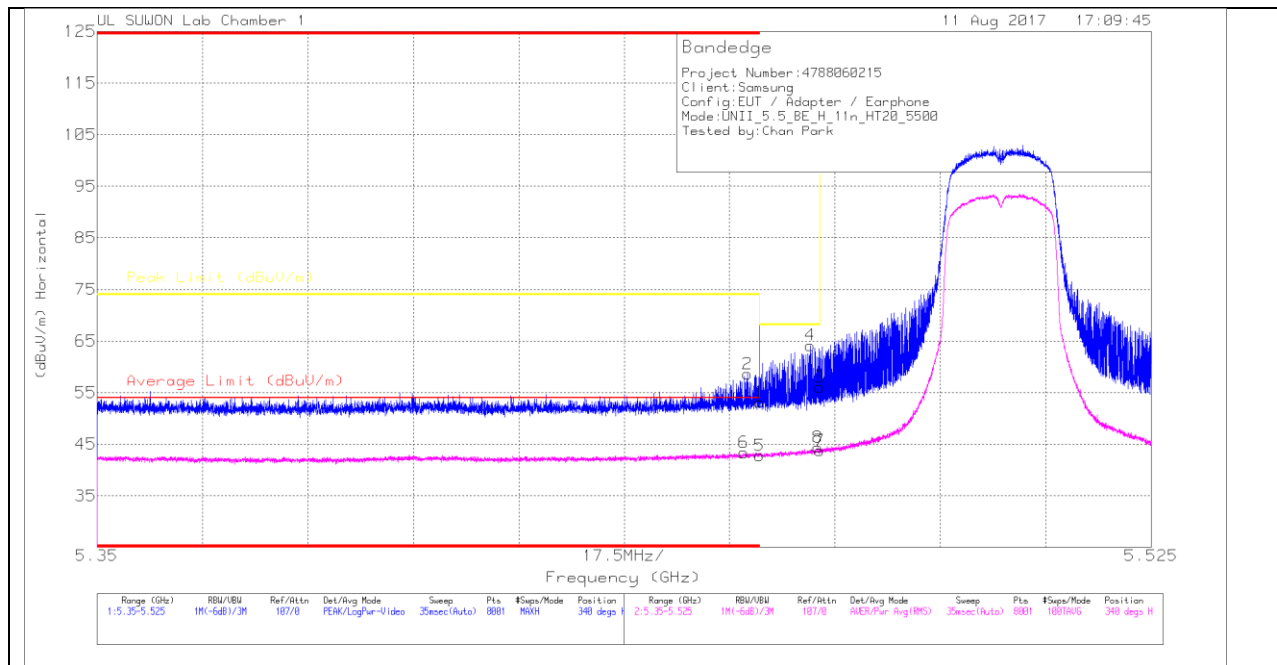

#### HORIZONTAL DATA

##### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3 117_001687 17	10dB_ATT(d B)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.35	Pk	34.3	-21.5	0	53.15	-	-	74	-20.85	340	100	H
2	* 5.458	45.93	Pk	34.3	-21.6	0	58.63	-	-	74	-15.37	340	100	H
3	5.47	43.28	Pk	34.3	-21.5	0	56.08	-	-	68.2	-12.12	340	100	H
4	5.468	51.48	Pk	34.3	-21.6	0	64.18	-	-	68.2	-4.02	340	100	H
5	* 5.46	29.72	RMS	34.3	-21.5	.3	42.82	54	-11.18	-	-	340	100	H
6	* 5.457	30.37	RMS	34.3	-21.6	.3	43.37	54	-10.63	-	-	340	100	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

**VERTICAL PEAK AND AVERAGE PLOT**

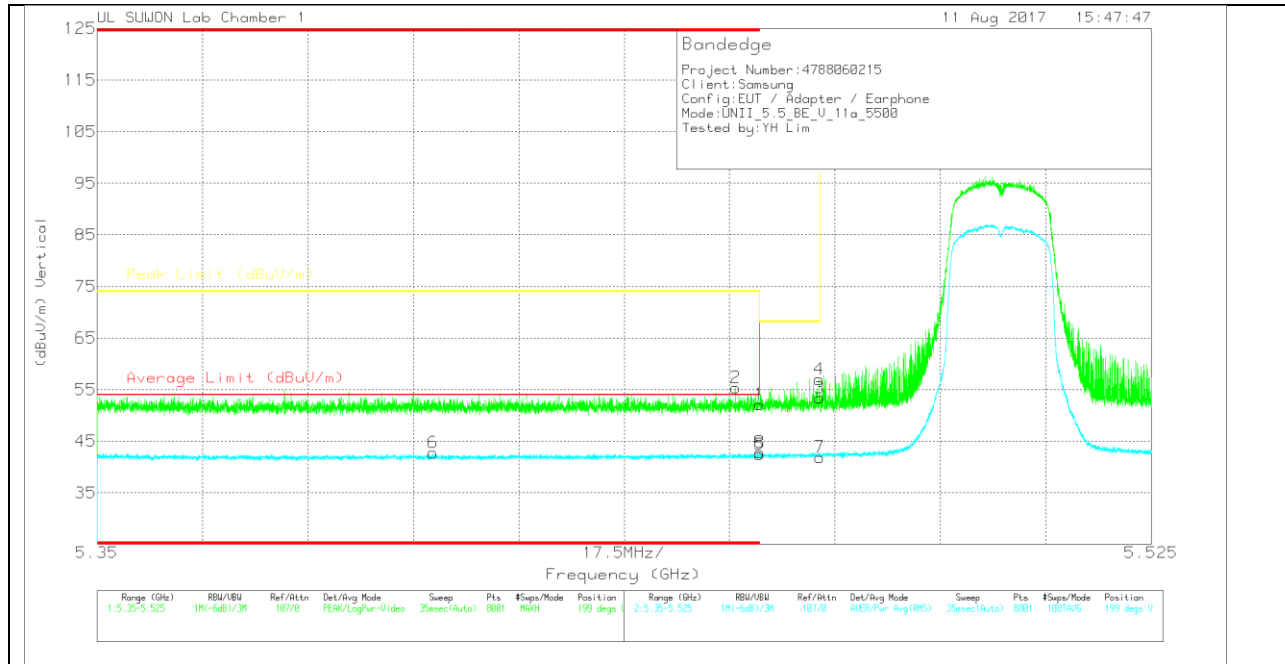

**VERTICAL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3 117_001687 17	10dB_ATT(d B)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.32	Pk	34.3	-21.5	0	52.12	-	-	74	-21.88	199	192	V
2	* 5.456	42.67	Pk	34.3	-21.6	0	55.37	-	-	74	-18.63	199	192	V
3	5.47	40.59	Pk	34.3	-21.5	0	53.39	-	-	68.2	-14.81	199	192	V
4	5.47	44.2	Pk	34.3	-21.5	0	57	-	-	68.2	-11.2	199	192	V
5	* 5.46	29.37	RMS	34.3	-21.5	.27	42.44	54	-11.56	-	-	199	192	V
6	* 5.406	29.99	RMS	34.2	-21.7	.27	42.76	54	-11.24	-	-	199	192	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

### AUTHORIZED BANDEDGE (HIGH CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

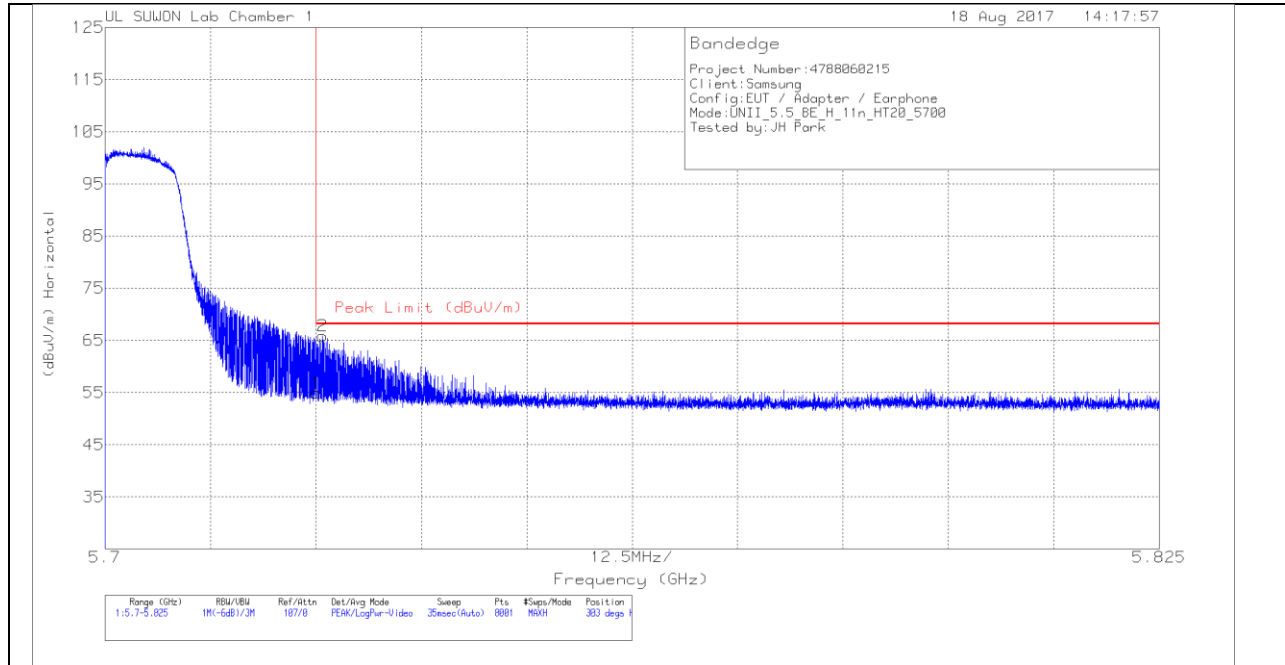


#### HORIZONTAL DATA

##### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	10dB_ATT(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.77	Pk	34.4	-21.2	0	54.97	68.2	-13.23	303	116	H
2	5.726	52.62	PK	34.4	-21.2	0	65.82	68.2	-2.38	303	116	H

Pk - Peak detector

**VERTICAL PEAK AND AVERAGE PLOT**

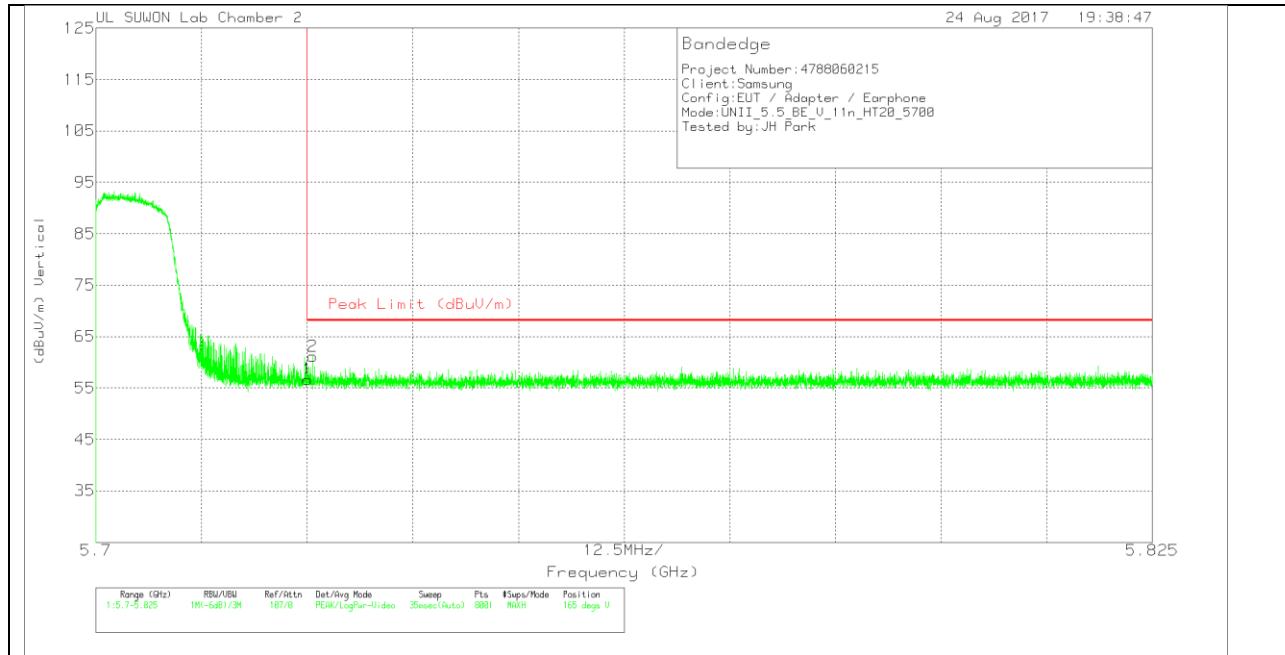

**VERTICAL DATA**


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_31 17[001687 24]	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	36.8	Pk	34.4	-14.5	0	56.7	68.2	-11.5	165	238	V
2	5.726	41.25	Pk	34.4	-14.5	0	61.15	68.2	-7.05	165	238	V


Pk - Peak detector

## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

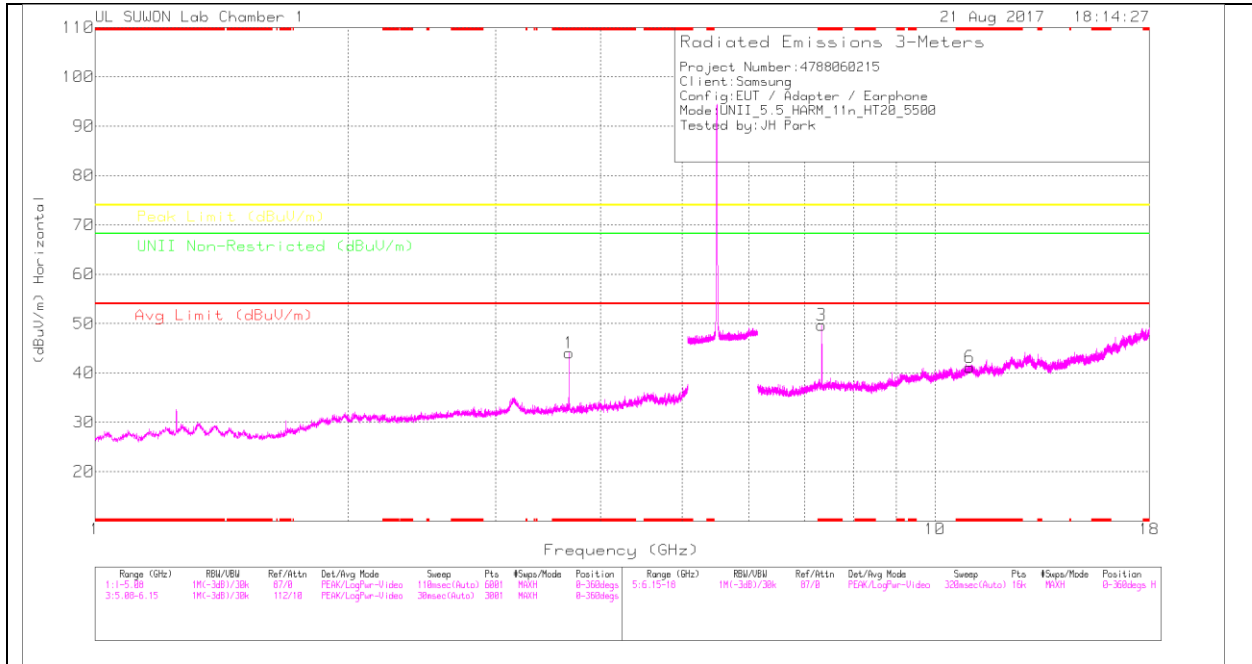

### LOW CHANNEL VERTICAL

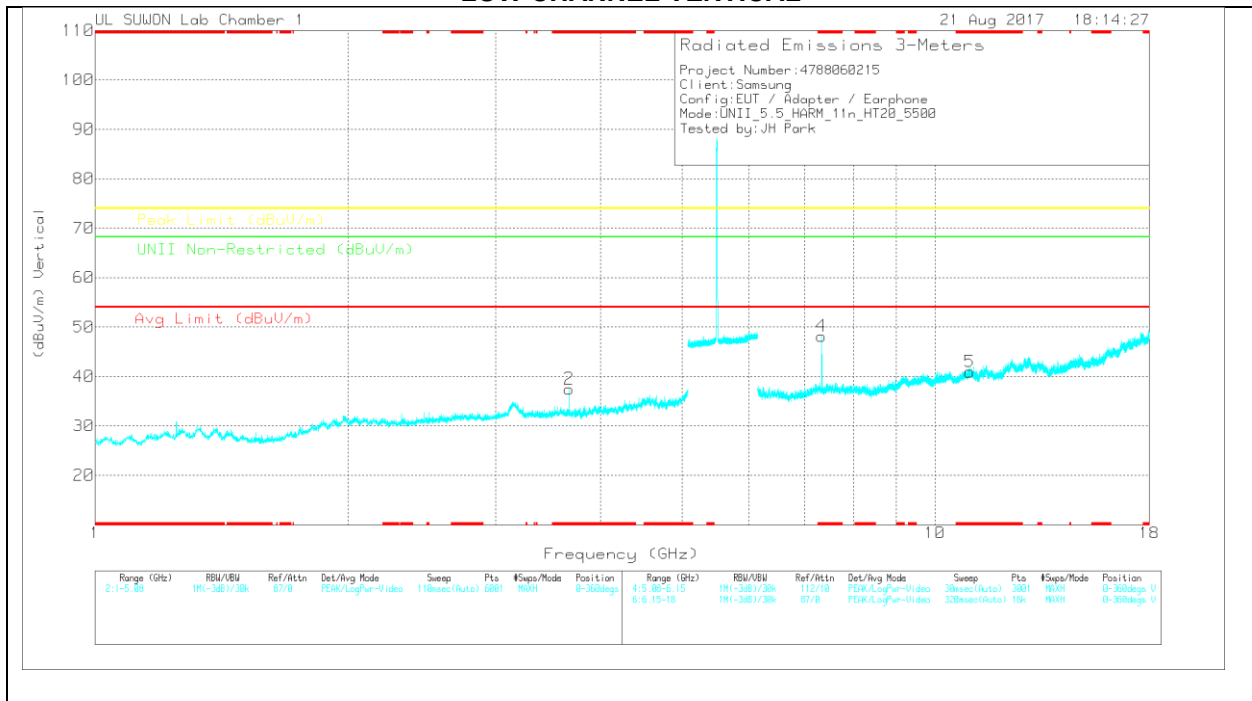

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	5GHz_LP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.667	43.53	PK	32.7	-32.2	0	44.03	-	-	74	-29.97	-	-	0-360	150	H
2	* 3.667	36.97	PK	32.7	-32.2	0	37.47	-	-	74	-36.53	-	-	0-360	250	V
3	* 7.333	41.18	PK	35.9	-27.4	0	49.68	-	-	74	-24.32	-	-	0-360	250	H
6	* 10.995	25.14	PK	38	-22	0	41.14	-	-	74	-32.86	-	-	0-360	250	H
4	* 7.333	39.67	PK	35.9	-27.4	0	48.17	-	-	74	-25.83	-	-	0-360	150	V
5	* 10.997	24.85	PK	38	-21.9	0	40.95	-	-	74	-33.05	-	-	0-360	250	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	5GHz_LP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.667	49.87	PK-U	32.7	-32.2	0	50.37	-	-	74	-23.63	-	-	352	353	H
* 3.667	41.04	ADR	32.7	-32.2	0	41.54	54	-12.46	-	-	-	-	352	353	H
* 3.667	46.22	PK-U	32.7	-32.2	0	46.72	-	-	74	-27.28	-	-	207	111	V
* 3.667	38.67	ADR	32.7	-32.2	0	39.17	54	-14.83	-	-	-	-	207	111	V
* 7.333	39.17	ADR	35.9	-27.4	0	47.67	54	-6.33	-	-	-	-	213	135	V
* 7.333	41.61	ADR	35.9	-27.4	0	50.11	54	-3.89	-	-	-	-	354	320	H
* 7.333	45.89	PK-U	35.9	-27.4	0	54.39	-	-	74	-19.61	-	-	213	135	V
* 7.333	47.29	PK-U	35.9	-27.4	0	55.79	-	-	74	-18.21	-	-	354	320	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HORIZONTAL

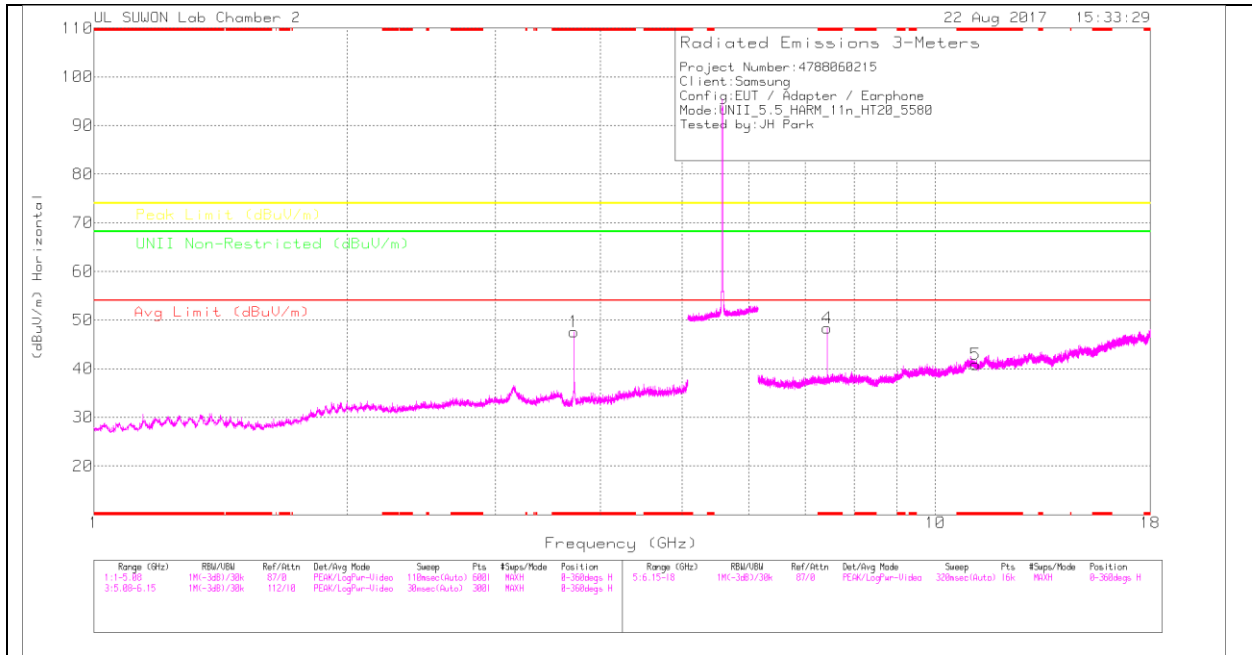

MID CHANNEL VERTICAL

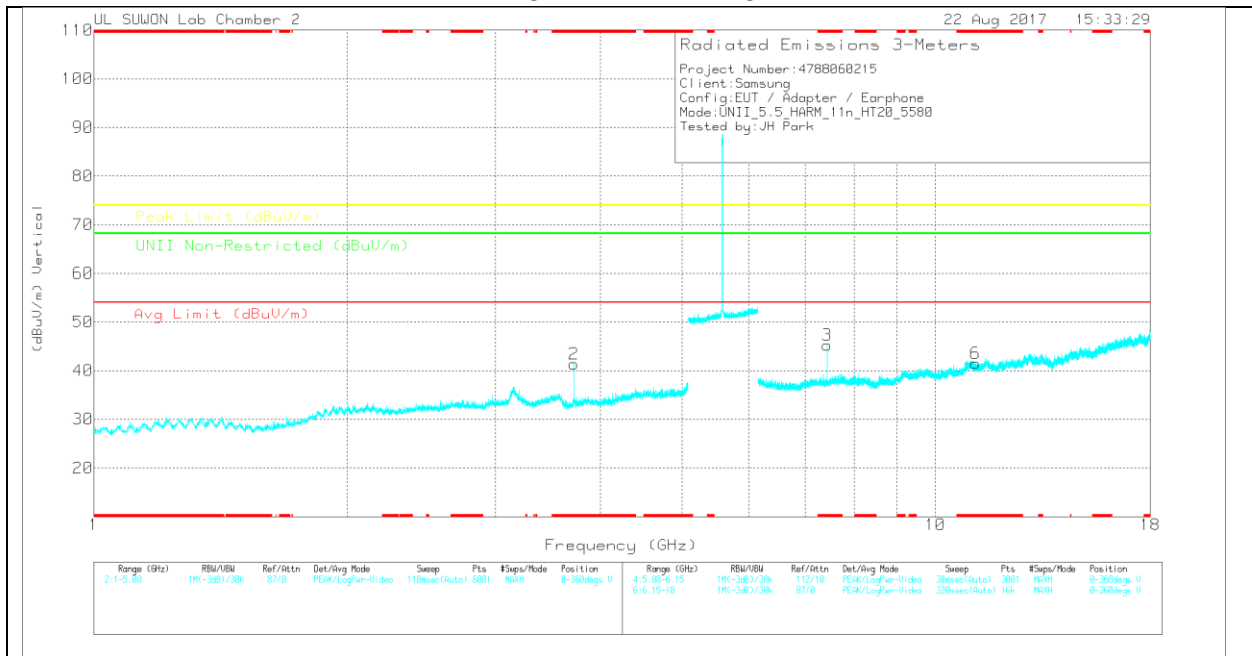

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117 [00168724]	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.72	40.38	PK	32.7	-25.5	0	47.58	-	-	74	-26.42	-	-	0-360	150	H
2	* 3.72	34.16	PK	32.7	-25.5	0	41.36	-	-	74	-32.64	-	-	0-360	250	V
4	* 7.44	33.62	PK	35.9	-21.2	0	48.32	-	-	74	-25.68	-	-	0-360	250	H
5	* 11.156	19.17	PK	37.9	-16.2	0	40.87	-	-	74	-33.13	-	-	0-360	150	H
3	* 7.44	30.6	PK	35.9	-21.2	0	45.3	-	-	74	-28.7	-	-	0-360	150	V
6	* 11.164	19.87	PK	37.9	-16.3	0	41.47	-	-	74	-32.53	-	-	0-360	250	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117 [00168724]	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.72	46.32	PK-U	32.7	-25.5	0	53.52	-	-	74	-20.48	-	-	9	155	H
* 3.72	39.38	ADR	32.7	-25.5	0	46.58	54	-7.42	-	-	-	-	9	155	H
* 3.72	41.54	PK-U	32.7	-25.5	0	48.74	-	-	74	-25.26	-	-	60	115	V
* 3.72	34.69	ADR	32.7	-25.5	0	41.89	54	-12.11	-	-	-	-	60	115	V
* 7.44	29.47	ADR	35.9	-21.2	0	44.17	54	-9.83	-	-	-	-	209	134	V
* 7.44	33.46	ADR	35.9	-21.2	0	48.16	54	-5.84	-	-	-	-	350	351	H
* 7.44	37.41	PK-U	35.9	-21.2	0	52.11	-	-	74	-21.89	-	-	209	134	V
* 7.44	39.44	PK-U	35.9	-21.2	0	54.14	-	-	74	-19.86	-	-	350	351	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

### HIGH CHANNEL HORIZONTAL

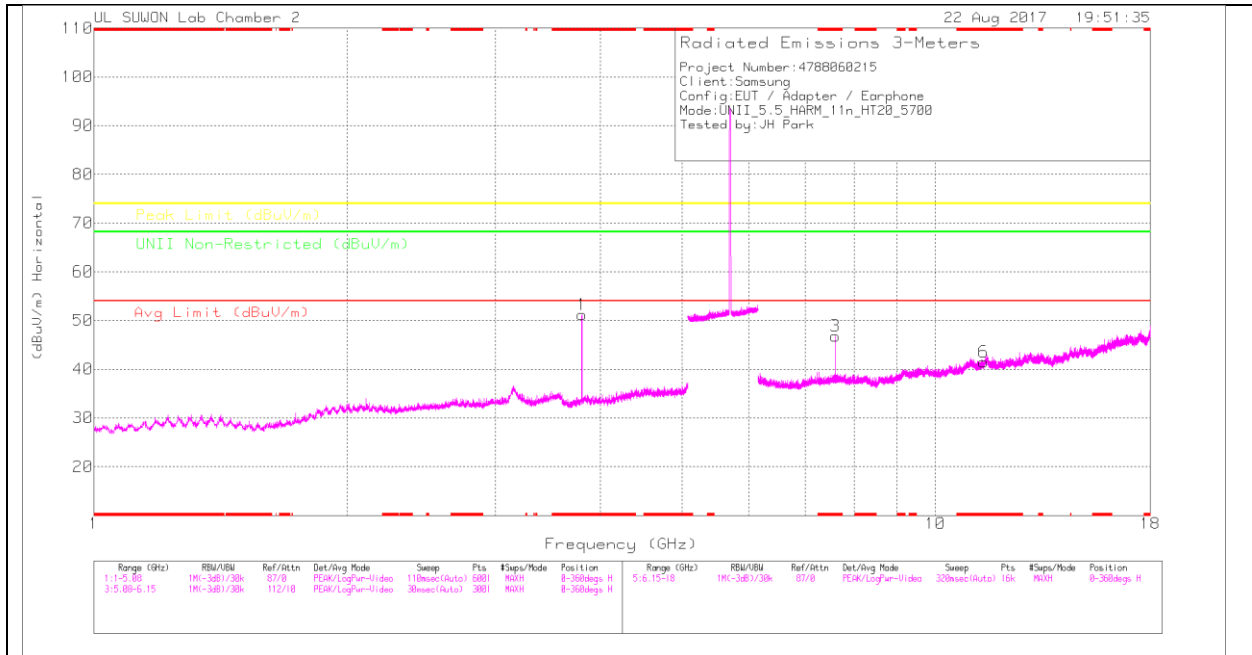

### HIGH CHANNEL VERTICAL

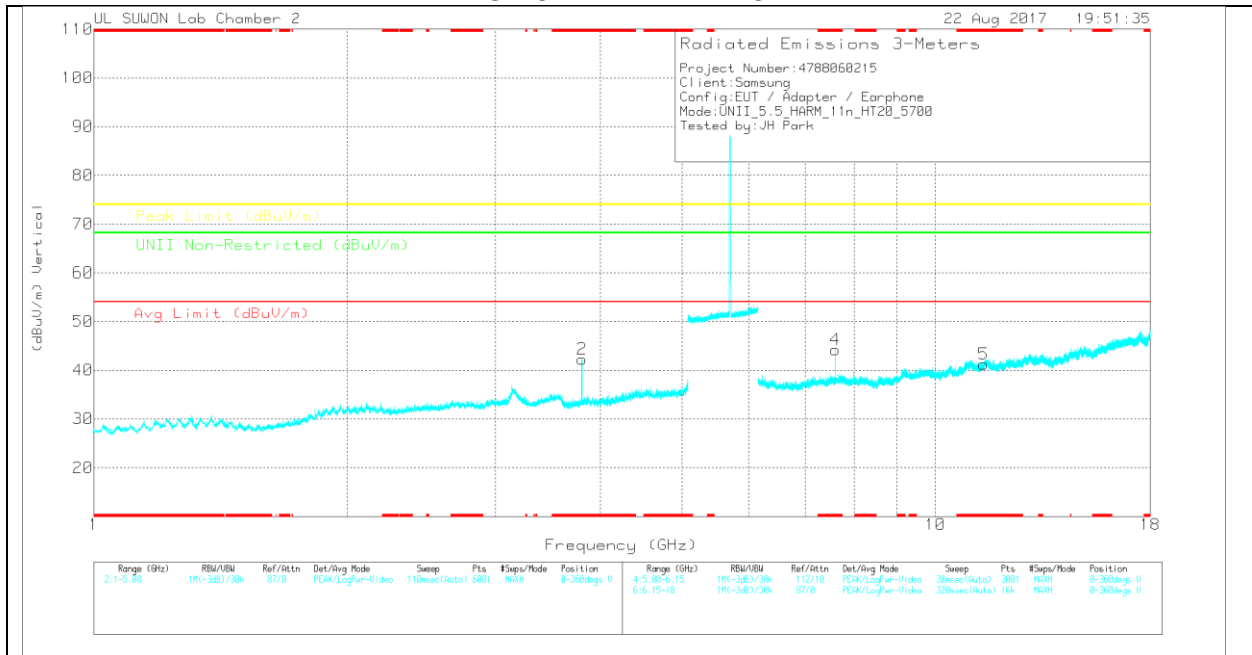

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_31 17[001687 24]	5GHz_LP[d B]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.8	43.69	PK	33	-25.5	0	51.19	-	-	74	-22.81	-	-	0-360	150	H
2	* 3.8	34.76	PK	33	-25.5	0	42.26	-	-	74	-31.74	-	-	0-360	150	V
3	* 7.6	31.4	PK	35.8	-20.4	0	46.8	-	-	74	-27.2	-	-	0-360	250	H
6	* 11.404	19.05	PK	38.1	-15.7	0	41.45	-	-	74	-32.55	-	-	0-360	250	H
4	* 7.599	28.84	PK	35.8	-20.4	0	44.24	-	-	74	-29.76	-	-	0-360	150	V
5	* 11.401	18.74	PK	38.1	-15.6	0	41.24	-	-	74	-32.76	-	-	0-360	150	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117 [00168724]	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.8	46.08	PK-U	33	-25.5	0	53.58	-	-	74	-20.42	-	-	0	146	H
* 3.8	42.92	ADR	33	-25.5	0	50.42	54	-3.58	-	-	-	-	0	146	H
* 3.8	40.93	PK-U	33	-25.5	0	48.43	-	-	74	-25.57	-	-	193	133	V
* 3.8	34.57	ADR	33	-25.5	0	42.07	54	-11.93	-	-	-	-	193	133	V
* 7.6	28.4	ADR	35.8	-20.4	0	43.8	54	-10.2	-	-	-	-	217	144	V
* 7.6	30.65	ADR	35.8	-20.4	0	46.05	54	-7.95	-	-	-	-	354	323	H
* 7.6	36.15	PK-U	35.8	-20.4	0	51.55	-	-	74	-22.45	-	-	217	144	V
* 7.6	37.63	PK-U	35.8	-20.4	0	53.03	-	-	74	-20.97	-	-	354	323	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**STRADDLE CHANNEL HORIZONTAL**

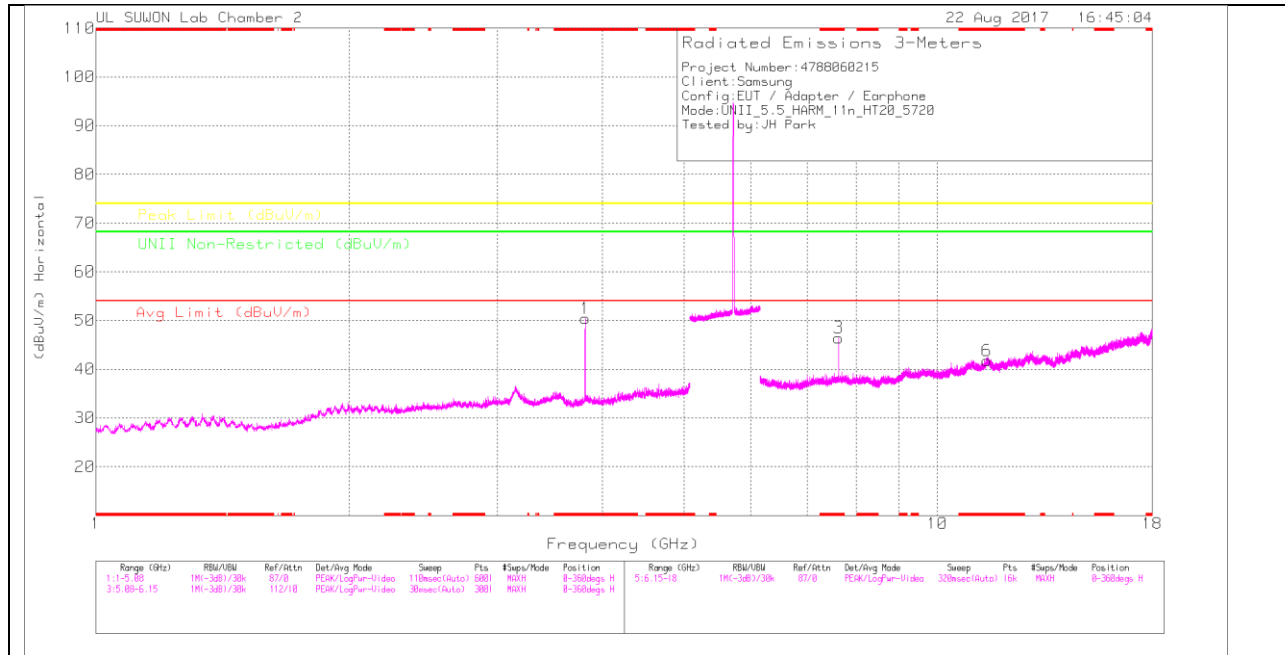

**STRADDLE CHANNEL VERTICAL**

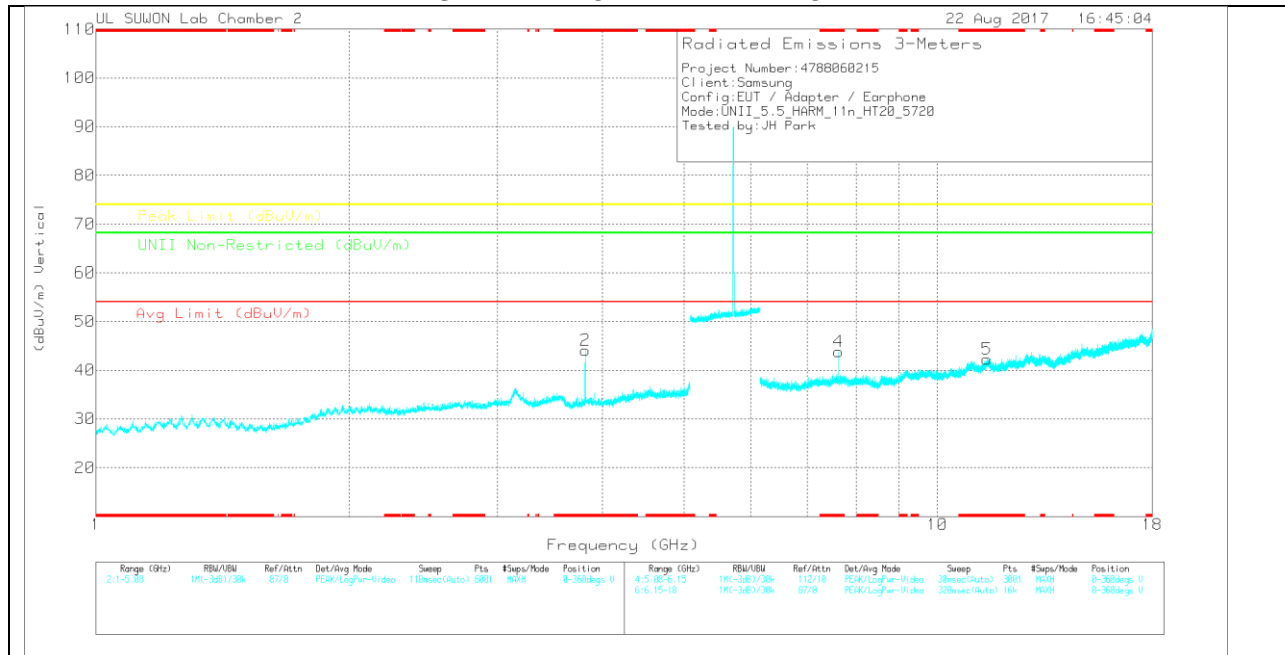

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**STRADDLE CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_31 17[001687 24]	5GHz_LP[d B]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.813	42.74	PK	33	-25.3	0	50.44	-	-	74	-23.56	-	-	0-360	150	H
2	* 3.813	36.35	PK	33	-25.3	0	44.05	-	-	74	-29.95	-	-	0-360	250	V
3	* 7.627	30.97	PK	35.8	-20.3	0	46.47	-	-	74	-27.53	-	-	0-360	250	H
6	* 11.457	19.53	PK	38.1	-15.9	0	41.73	-	-	74	-32.27	-	-	0-360	149	H
4	* 7.627	28.37	PK	35.8	-20.3	0	43.87	-	-	74	-30.13	-	-	0-360	150	V
5	* 11.455	20.22	PK	38.1	-16	0	42.32	-	-	74	-31.68	-	-	0-360	250	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117 [00168724]	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.814	45.54	PK-U	33	-25.3	0	53.24	-	-	74	-20.76	-	-	16	130	H
* 3.813	42.12	ADR	33	-25.3	0	49.82	54	-4.18	-	-	-	-	16	130	H
* 3.813	40.97	PK-U	33	-25.3	0	48.67	-	-	74	-25.33	-	-	39	132	V
* 3.813	35.2	ADR	33	-25.3	0	42.9	54	-11.1	-	-	-	-	39	132	V
* 7.627	31.06	ADR	35.8	-20.3	0	46.56	54	-7.44	-	-	-	-	357	347	H
* 7.627	26.96	ADR	35.8	-20.3	0	42.46	54	-11.54	-	-	-	-	223	149	V
* 7.627	38.05	PK-U	35.8	-20.3	0	53.55	-	-	74	-20.45	-	-	357	347	H
* 7.626	35.69	PK-U	35.8	-20.3	0	51.19	-	-	74	-22.81	-	-	223	149	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

### 10.3.3. TX ABOVE 1GHz 802.11n HT40 MODE IN THE 5.5GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

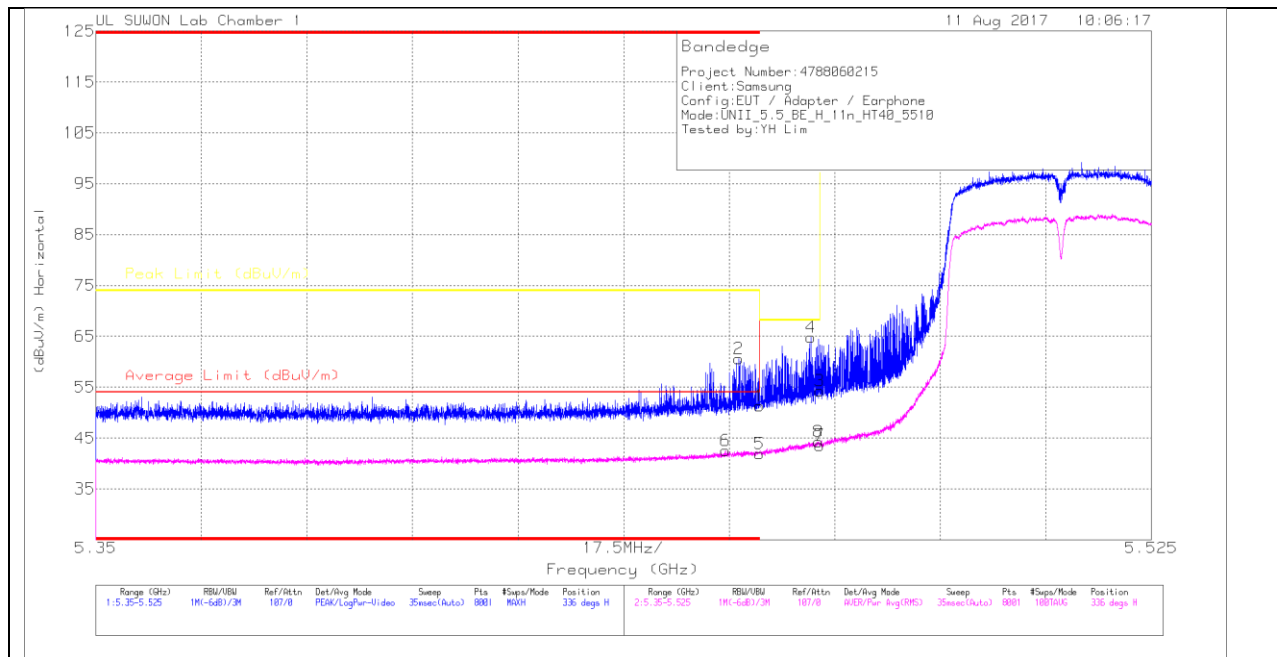

#### HORIZONTAL DATA

##### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3 117_001687 17	10dB_Att(dB )	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.07	Pk		-23.1	0	51.27	-	-	74	-22.73	336	105	H
2	* 5.457	49.52	Pk		-23.2	0	60.62	-	-	74	-13.38	336	105	H
3	5.47	43.07	Pk		-23.1	0	54.27	-	-	68.2	-13.93	336	105	H
4	5.469	53.63	Pk		-23.1	0	64.83	-	-	68.2	-3.37	336	105	H
5	* 5.46	30.74	RMS		-23.7	.56	41.9	54	-12.1	-	-	336	105	H
6	* 5.454	31.38	RMS		-23.7	.56	42.54	54	-11.46	-	-	336	105	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

**VERTICAL PEAK AND AVERAGE PLOT**

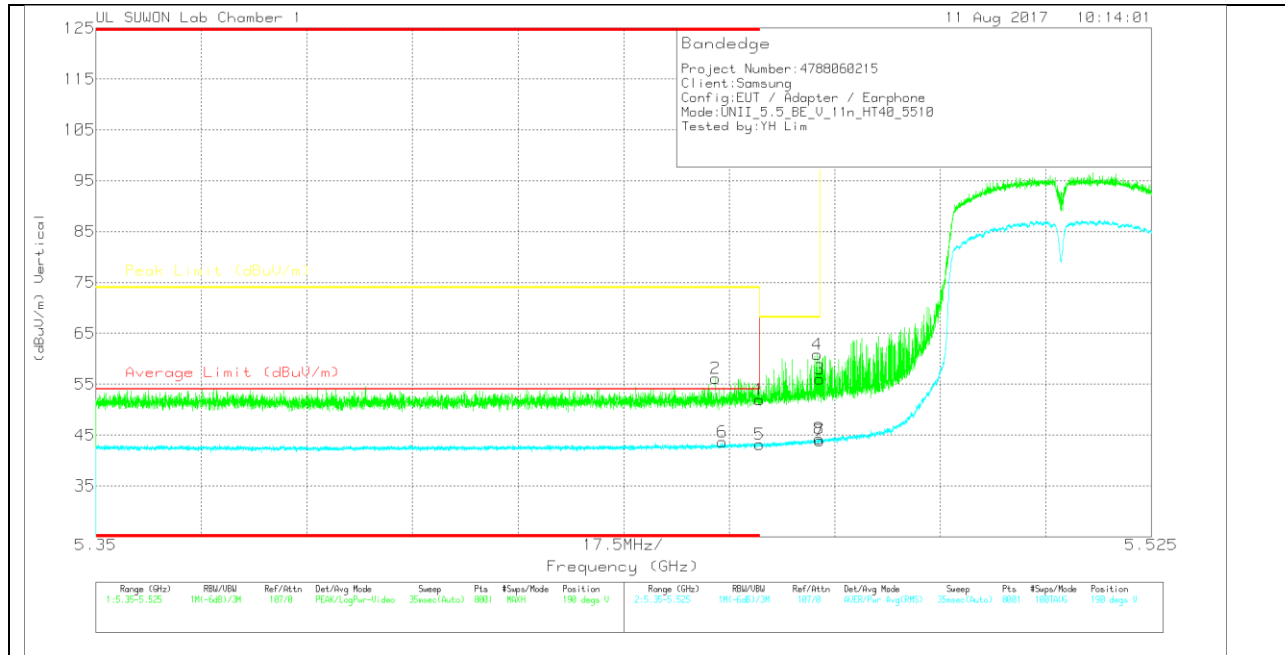

**VERTICAL DATA**

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3 117_001687 17	10dB_ATT(d B)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.13	Pk	34.3	-21.5	0	51.93	-	-	74	-22.07	190	228	V
2	* 5.453	43.44	Pk	34.3	-21.6	0	56.14	-	-	74	-17.86	190	228	V
3	5.47	43.16	Pk	34.3	-21.5	0	55.96	-	-	68.2	-12.24	190	228	V
4	5.47	48.17	Pk	34.3	-21.6	0	60.87	-	-	68.2	-7.33	190	228	V
5	* 5.46	29.84	RMS	34.3	-21.5	.56	43.2	54	-10.8	-	-	190	228	V
6	* 5.454	30.29	RMS	34.3	-21.5	.56	43.65	54	-10.35	-	-	190	228	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

### AUTHORIZED BANDEDGE (HIGH CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

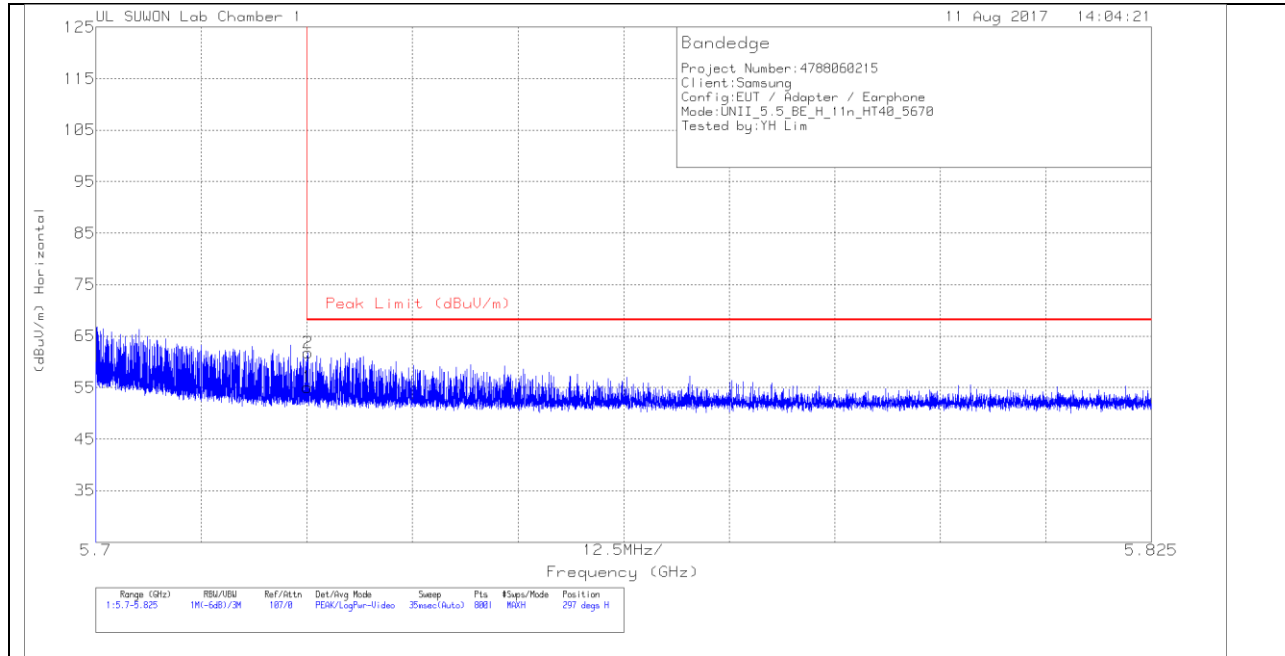


#### HORIZONTAL DATA

##### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_0016 8717	10dB_ATT(dB)_17080 9	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.91	Pk	34.4	-21.2	0	55.11	68.2	-13.09	297	299	H
2	5.725	48.62	Pk	34.4	-21.2	0	61.82	68.2	-6.38	297	299	H

Pk - Peak detector

**VERTICAL PEAK AND AVERAGE PLOT**

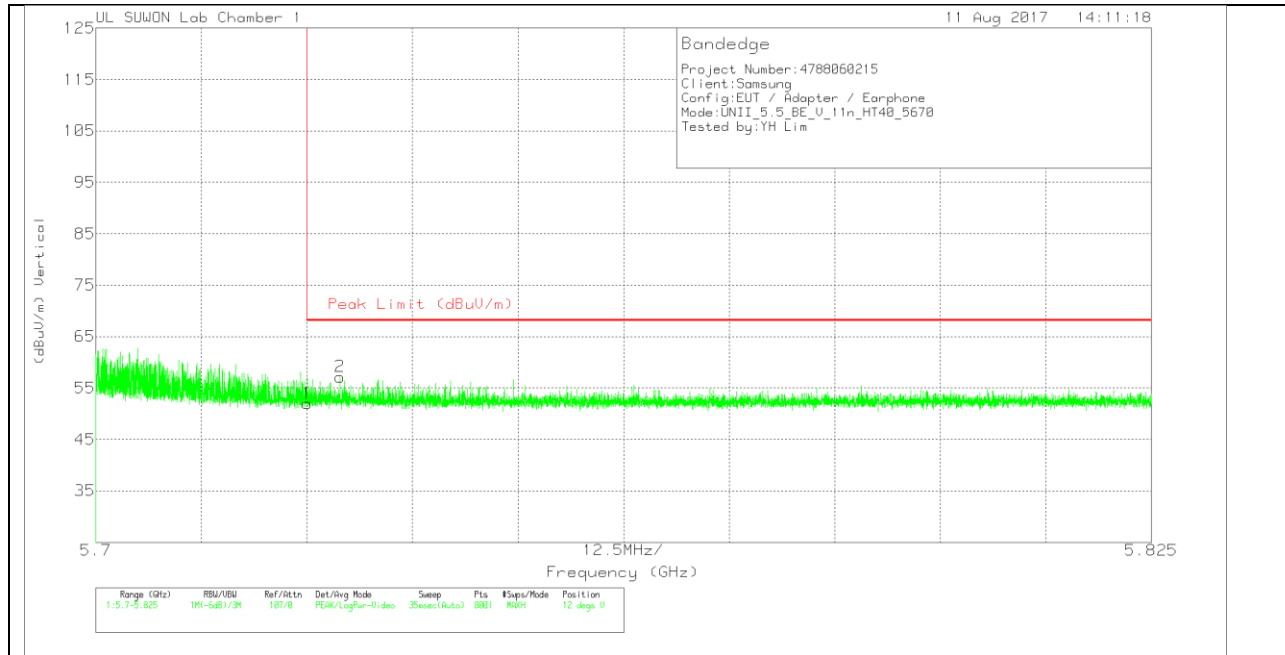

**VERTICAL DATA**


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_0016 8717	10dB_ATT(dB)_17080 9	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	38.76	Pk	34.4	-21.2	0	51.96	68.2	-16.24	12	100	V
2	5.729	43.99	Pk	34.4	-21.2	0	57.19	68.2	-11.01	12	100	V


Pk - Peak detector

## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

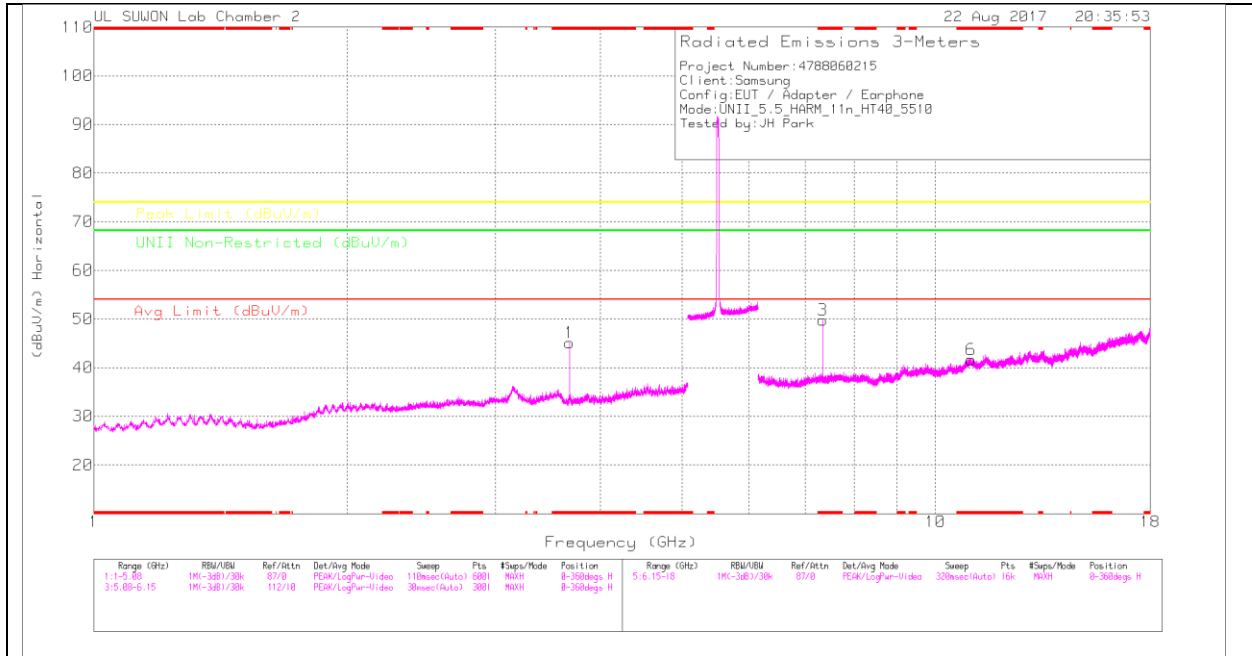

### LOW CHANNEL VERTICAL

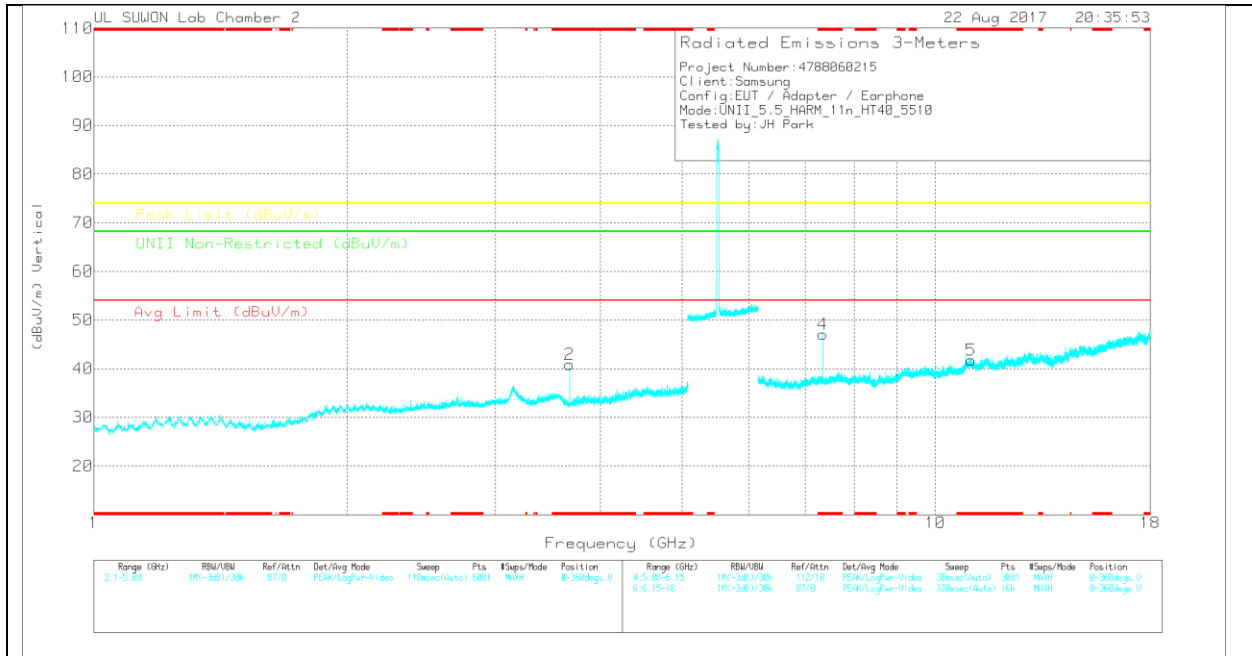

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_31 171001687 24]	5GHz_LP[d B]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.673	38.05	PK	32.7	-25.6	0	45.15	-	-	74	-28.85	-	-	0-360	150	H
2	* 3.673	33.72	PK	32.7	-25.6	0	40.82	-	-	74	-33.18	-	-	0-360	250	V
3	* 7.346	34.53	PK	35.9	-20.7	0	49.73	-	-	74	-24.27	-	-	0-360	150	H
6	* 11.016	19.67	PK	38	-16.1	0	41.57	-	-	74	-32.43	-	-	0-360	150	H
4	* 7.346	31.84	PK	35.9	-20.7	0	47.04	-	-	74	-26.96	-	-	0-360	150	V
5	* 11.019	19.9	PK	38	-16.1	0	41.8	-	-	74	-32.2	-	-	0-360	250	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117 [00168724]	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.673	44.11	PK-U	32.7	-25.6	0	51.21	-	-	74	-22.79	-	-	5	101	H
* 3.673	38.56	ADR	32.7	-25.6	0	45.66	54	-8.34	-	-	-	-	5	101	H
* 3.673	39.62	PK-U	32.7	-25.6	0	46.72	-	-	74	-27.28	-	-	55	116	V
* 3.673	31.65	ADR	32.7	-25.6	0	38.75	54	-15.25	-	-	-	-	55	116	V
* 7.347	31.85	ADR	35.9	-20.7	0	47.05	54	-6.95	-	-	-	-	214	151	V
* 7.347	34.19	ADR	35.9	-20.7	0	49.39	54	-4.61	-	-	-	-	357	307	H
* 7.347	37.99	PK-U	35.9	-20.7	0	53.19	-	-	74	-20.81	-	-	214	151	V
* 7.347	40.43	PK-U	35.9	-20.7	0	55.63	-	-	74	-18.37	-	-	357	307	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**MID CHANNEL (5550MHz) HORIZONTAL**

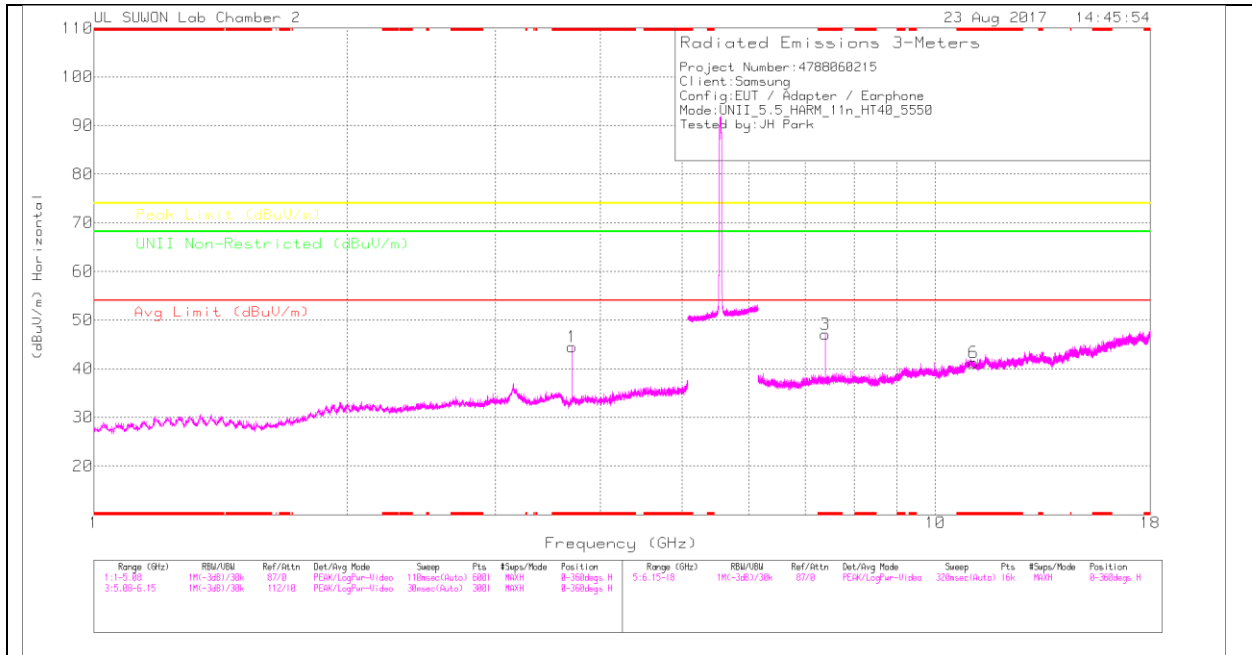

**MID CHANNEL (5550MHz) VERTICAL**

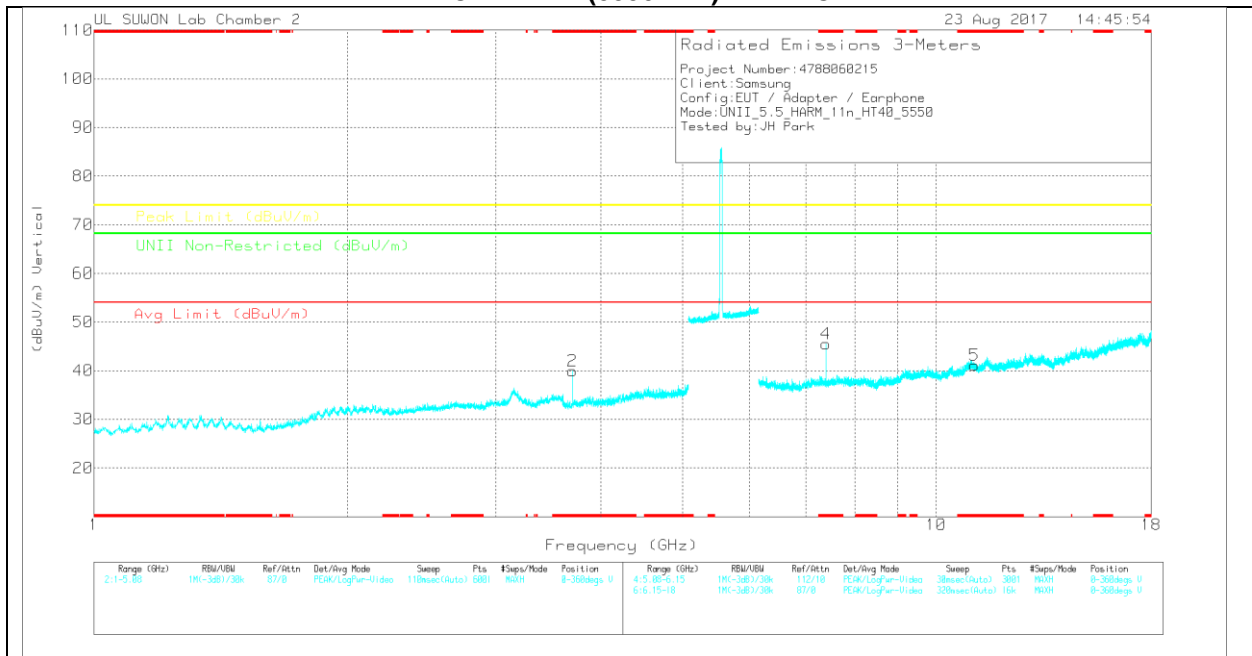

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL(5550MHz) DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117 [00168724]	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.7	37.42	PK	32.6	-25.5	0	44.52	-	-	74	-29.48	-	-	0-360	250	H
2	* 3.7	32.85	PK	32.6	-25.5	0	39.95	-	-	74	-34.05	-	-	0-360	250	V
3	* 7.4	32.27	PK	35.9	-21.1	0	47.07	-	-	74	-26.93	-	-	0-360	150	H
6	* 11.102	19.28	PK	38	-16.1	0	41.18	-	-	74	-32.82	-	-	0-360	250	H
4	* 7.4	30.65	PK	35.9	-21.1	0	45.45	-	-	74	-28.55	-	-	0-360	150	V
5	* 11.1	19.19	PK	38	-16.1	0	41.09	-	-	74	-32.91	-	-	0-360	150	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117 [00168724]	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.7	42.68	PK-U	32.6	-25.5	0	49.78	-	-	74	-24.22	-	-	11	109	H
* 3.7	37.61	ADR	32.6	-25.5	0	44.71	54	-9.29	-	-	-	-	11	109	H
* 3.7	39.74	PK-U	32.6	-25.5	0	46.84	-	-	74	-27.16	-	-	204	120	V
* 3.7	30.47	ADR	32.6	-25.5	0	37.57	54	-16.43	-	-	-	-	204	120	V
* 7.4	30.26	ADR	35.9	-21.1	0	45.06	54	-8.94	-	-	-	-	220	137	V
* 7.4	33.49	ADR	35.9	-21.1	0	48.29	54	-5.71	-	-	-	-	354	386	H
* 7.4	37.38	PK-U	35.9	-21.1	0	52.18	-	-	74	-21.82	-	-	220	137	V
* 7.4	38.97	PK-U	35.9	-21.1	0	53.77	-	-	74	-20.23	-	-	354	386	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**MID CHANNEL(5590MHz) HORIZONTAL**

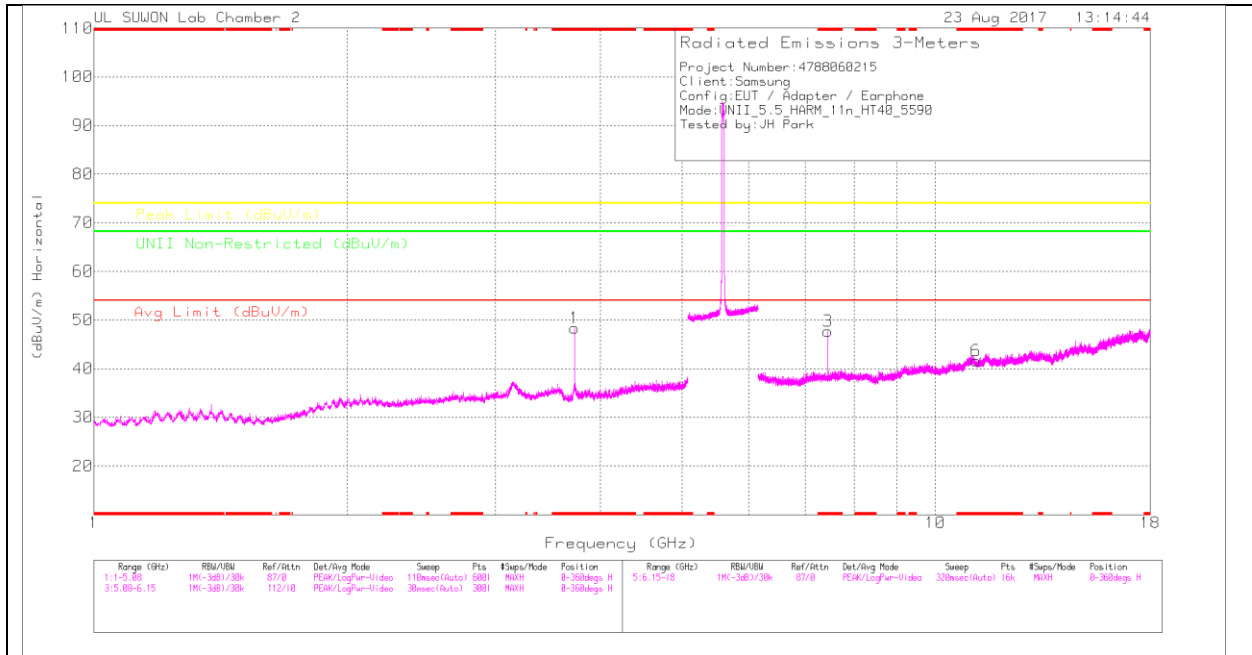

**MID CHANNEL(5590MHz) VERTICAL**

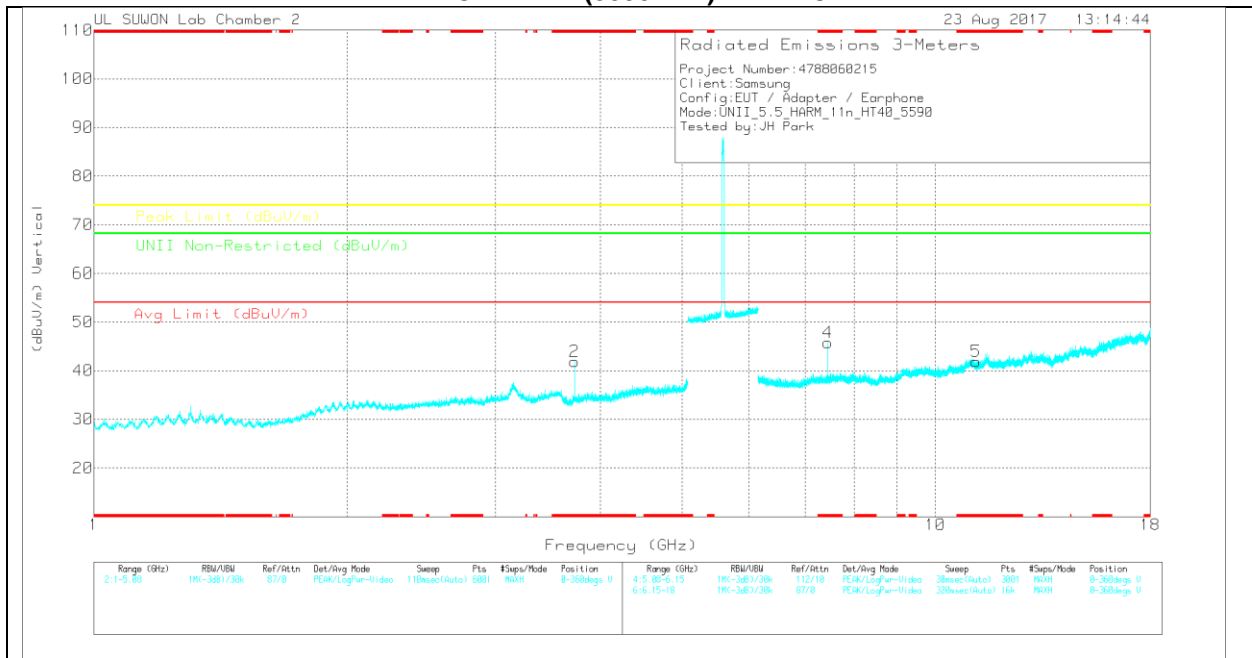

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL(5590MHz) DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117 [00168724]	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.727	40.99	PK	32.8	-25.5	0	48.29	-	-	74	-25.71	-	-	0-360	150	H
2	* 3.727	34.57	PK	32.8	-25.5	0	41.87	-	-	74	-32.13	-	-	0-360	250	V
3	* 7.453	32.97	PK	35.9	-21.2	0	47.67	-	-	74	-26.33	-	-	0-360	150	H
6	* 11.178	19.89	PK	37.9	-16.2	0	41.59	-	-	74	-32.41	-	-	0-360	150	H
4	* 7.453	31.04	PK	35.9	-21.2	0	45.74	-	-	74	-28.26	-	-	0-360	150	V
5	* 11.181	20.25	PK	37.9	-16.3	0	41.85	-	-	74	-32.15	-	-	0-360	250	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117 [00168724]	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.726	45.59	PK-U	32.8	-25.5	0	52.89	-	-	74	-21.11	-	-	2	107	H
* 3.727	40.79	ADR	32.8	-25.5	0	48.09	54	-5.91	-	-	-	-	2	107	H
* 3.727	41.28	PK-U	32.8	-25.5	0	48.58	-	-	74	-25.42	-	-	204	103	V
* 3.727	32.15	ADR	32.8	-25.5	0	39.45	54	-14.55	-	-	-	-	204	103	V
* 7.453	30.53	ADR	35.9	-21.2	0	45.23	54	-8.77	-	-	-	-	142	122	V
* 7.453	32.43	ADR	35.9	-21.2	0	47.13	54	-6.87	-	-	-	-	351	382	H
* 7.453	37.18	PK-U	35.9	-21.2	0	51.88	-	-	74	-22.12	-	-	142	122	V
* 7.454	38.98	PK-U	35.9	-21.2	0	53.68	-	-	74	-20.32	-	-	351	382	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

### HIGH CHANNEL HORIZONTAL

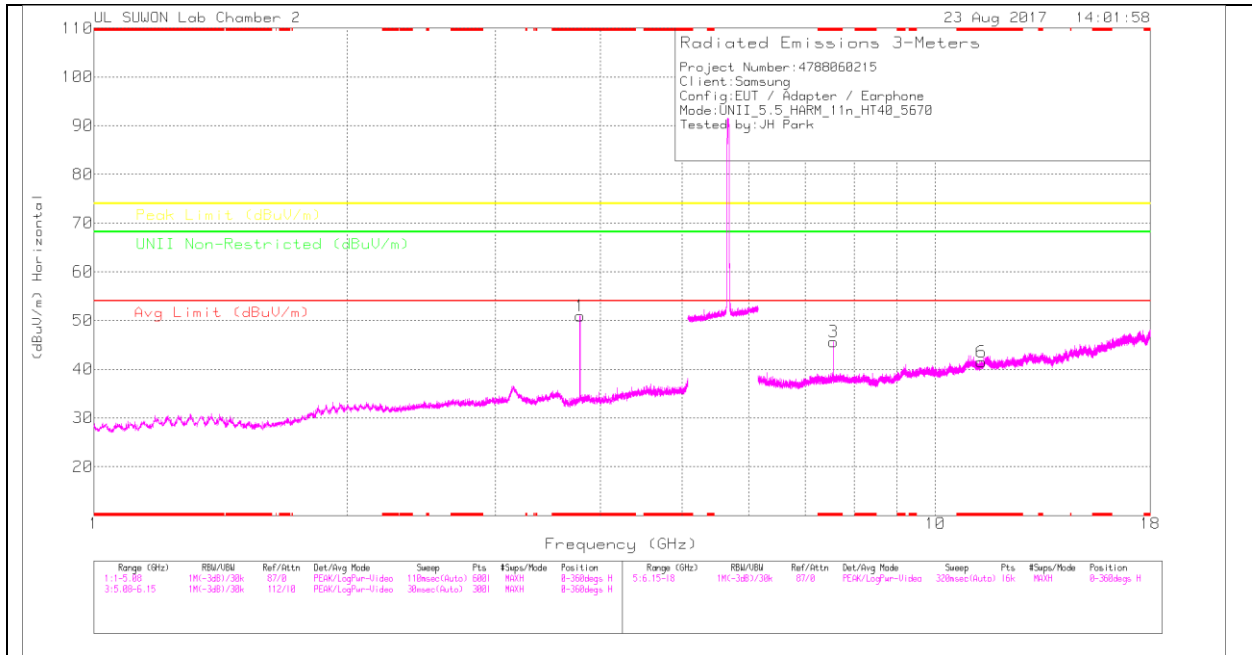

### HIGH CHANNEL VERTICAL

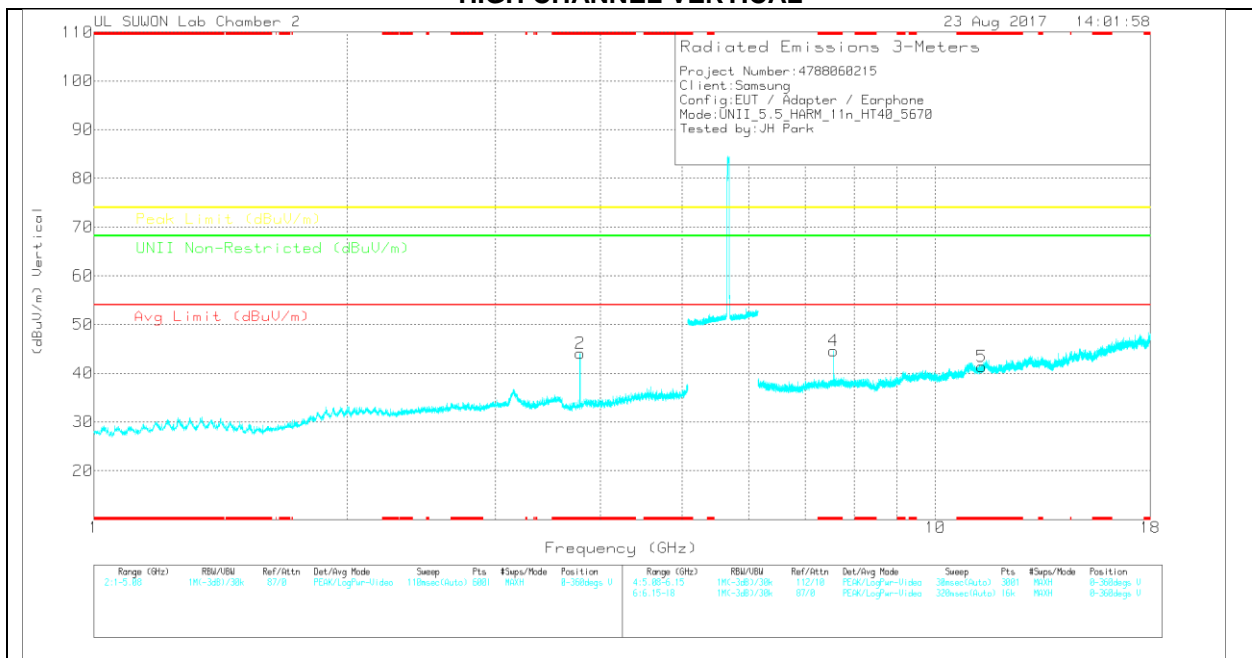

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_31 171001687 241	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.781	43.66	PK	33	-25.7	0	50.96	-	-	74	-23.04	-	-	0-360	150	H
2	* 3.781	36.76	PK	33	-25.7	0	44.06	-	-	74	-29.94	-	-	0-360	250	V
3	* 7.559	30.23	PK	35.8	-20.4	0	45.63	-	-	74	-28.37	-	-	0-360	149	H
6	* 11.341	18.97	PK	38	-15.5	0	41.47	-	-	74	-32.53	-	-	0-360	250	H
4	* 7.559	29.16	PK	35.8	-20.4	0	44.56	-	-	74	-29.44	-	-	0-360	150	V
5	* 11.342	18.82	PK	38	-15.5	0	41.32	-	-	74	-32.68	-	-	0-360	250	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117 [00168724]	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.78	46.2	PK-U	33	-25.7	0	53.5	-	-	74	-20.5	-	-	0	148	H
* 3.78	42.6	ADR	33	-25.7	0	49.9	54	-4.1	-	-	-	-	0	148	H
* 3.78	41.97	PK-U	33	-25.7	0	49.27	-	-	74	-24.73	-	-	78	168	V
* 3.78	36.11	ADR	33	-25.7	0	43.41	54	-10.59	-	-	-	-	78	168	V
* 7.56	27.17	ADR	35.8	-20.4	0	42.57	54	-11.43	-	-	-	-	207	142	V
* 7.56	31.86	ADR	35.8	-20.4	0	47.26	54	-6.74	-	-	-	-	352	400	H
* 7.56	35.93	PK-U	35.8	-20.4	0	51.33	-	-	74	-22.67	-	-	207	142	V
* 7.56	38.15	PK-U	35.8	-20.4	0	53.55	-	-	74	-20.45	-	-	352	400	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**STRADDLE CHANNEL HORIZONTAL**

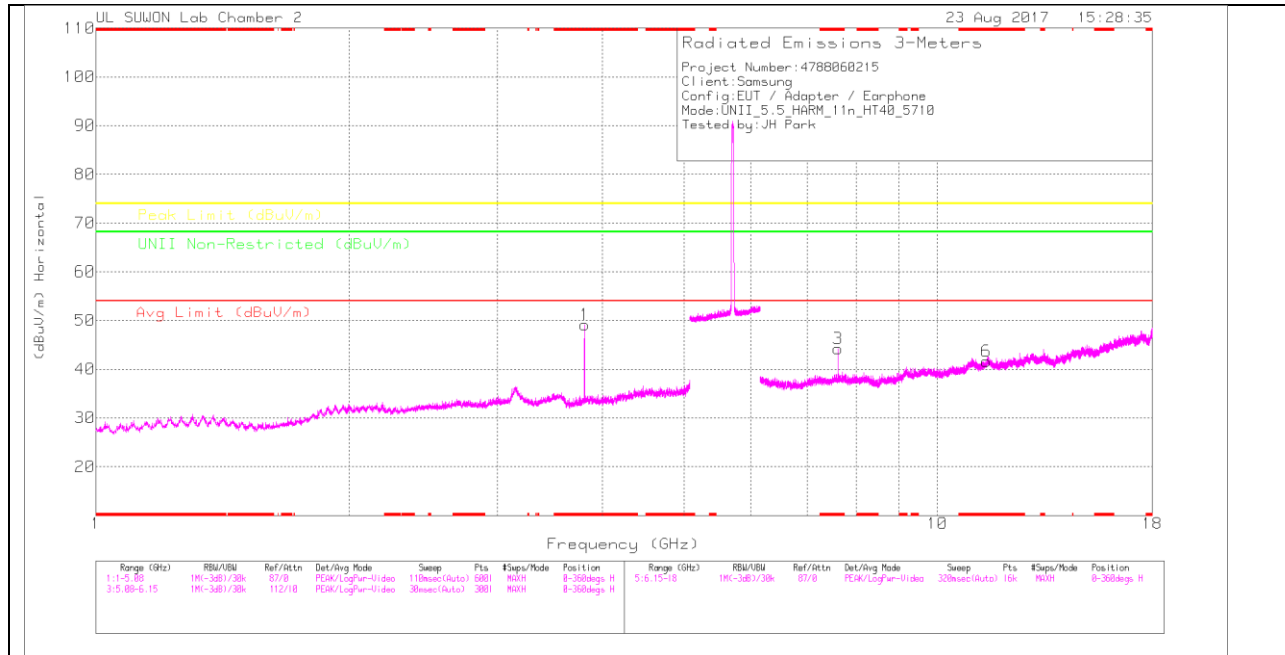

**STRADDLE CHANNEL VERTICAL**

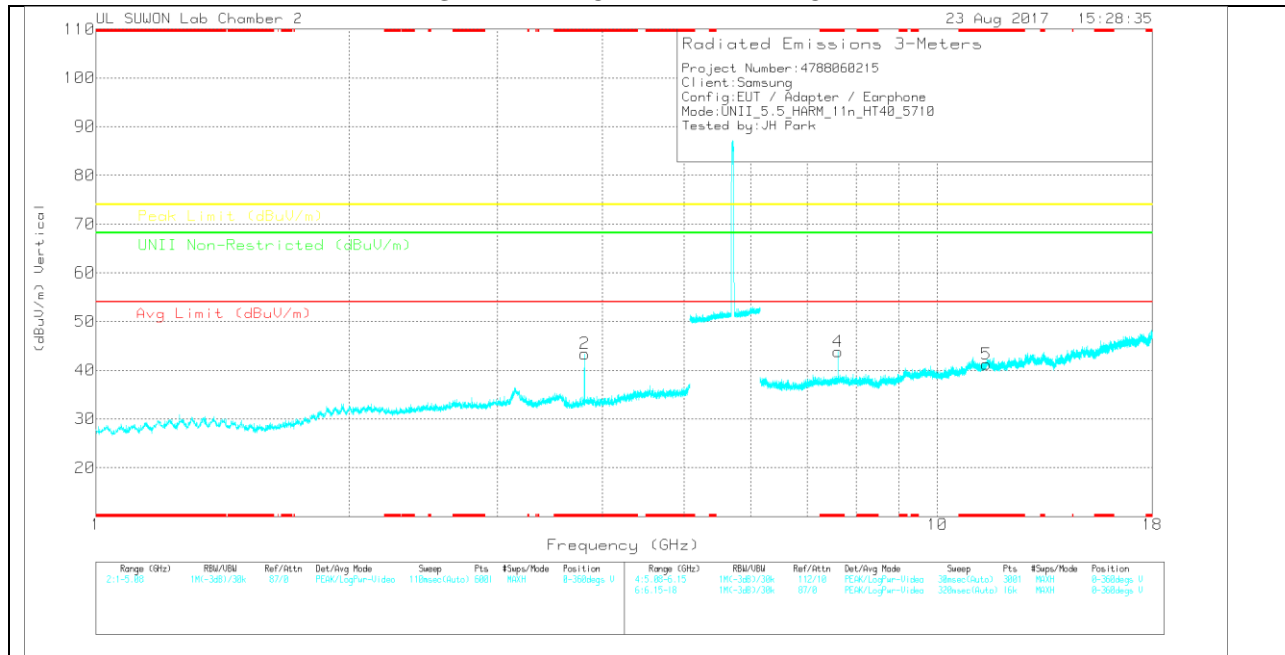

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**STRADDLE CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_31 171001687 241	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.807	41.55	PK	33	-25.4	0	49.15	-	-	74	-24.85	-	-	0-360	150	H
2	* 3.807	35.77	PK	33	-25.4	0	43.37	-	-	74	-30.63	-	-	0-360	250	V
3	* 7.613	28.85	PK	35.8	-20.4	0	44.25	-	-	74	-29.75	-	-	0-360	250	H
6	* 11.424	19.31	PK	38.1	-15.8	0	41.61	-	-	74	-32.39	-	-	0-360	250	H
4	* 7.613	28.38	PK	35.8	-20.4	0	43.78	-	-	74	-30.22	-	-	0-360	150	V
5	* 11.42	18.88	PK	38.1	-15.8	0	41.18	-	-	74	-32.82	-	-	0-360	250	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117 [00168724]	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.807	45.12	PK-U	33	-25.4	0	52.72	-	-	74	-21.28	-	-	359	164	H
* 3.807	40.27	ADR	33	-25.4	0	47.87	54	-6.13	-	-	-	-	359	164	H
* 3.807	41.42	PK-U	33	-25.4	0	49.02	-	-	74	-24.98	-	-	76	287	V
* 3.807	35.63	ADR	33	-25.4	0	43.23	54	-10.77	-	-	-	-	76	287	V
* 7.613	27.26	ADR	35.8	-20.4	0	42.66	54	-11.34	-	-	-	-	203	130	V
* 7.613	30.6	ADR	35.8	-20.4	0	46	54	-8	-	-	-	-	351	396	H
* 7.614	36.23	PK-U	35.8	-20.4	0	51.63	-	-	74	-22.37	-	-	203	130	V
* 7.613	37.11	PK-U	35.8	-20.4	0	52.51	-	-	74	-21.49	-	-	351	396	H


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

### 10.3.4.TX ABOVE 1GHz 802.11ac VHT80 MODE IN THE 5.5GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

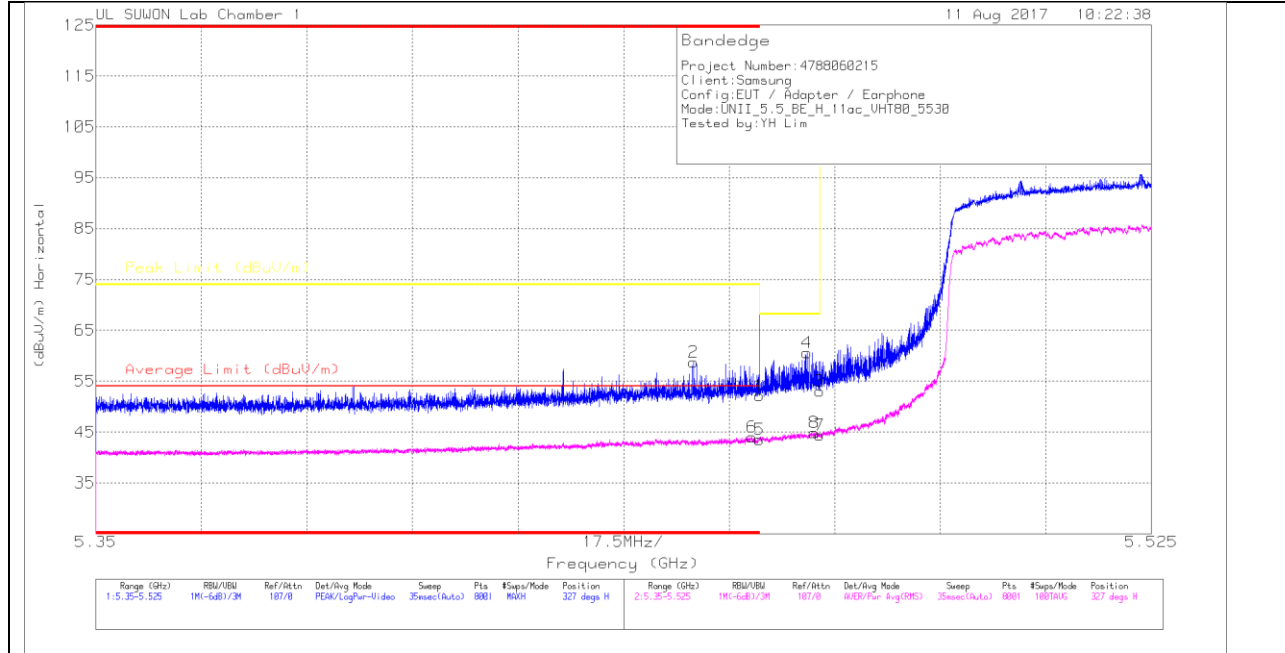

#### HORIZONTAL DATA

#### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3 117_001687 17	10dB_Att(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.03	Pk		-23.1	0	52.23	-	-	74	-21.77	327	110	H
2	* 5.449	47.74	Pk		-23.3	0	58.74	-	-	74	-15.26	327	110	H
3	5.47	41.84	Pk		-23.1	0	53.04	-	-	68.2	-15.16	327	110	H
4	5.468	49.4	Pk		-23.1	0	60.6	-	-	68.2	-7.6	327	110	H
5	* 5.46	31.83	RMS		-23.7	1.04	43.47	54	-10.53	-	-	327	110	H
6	* 5.459	32.43	RMS		-23.7	1.04	44.07	54	-9.93	-	-	327	110	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

**VERTICAL PEAK AND AVERAGE PLOT**

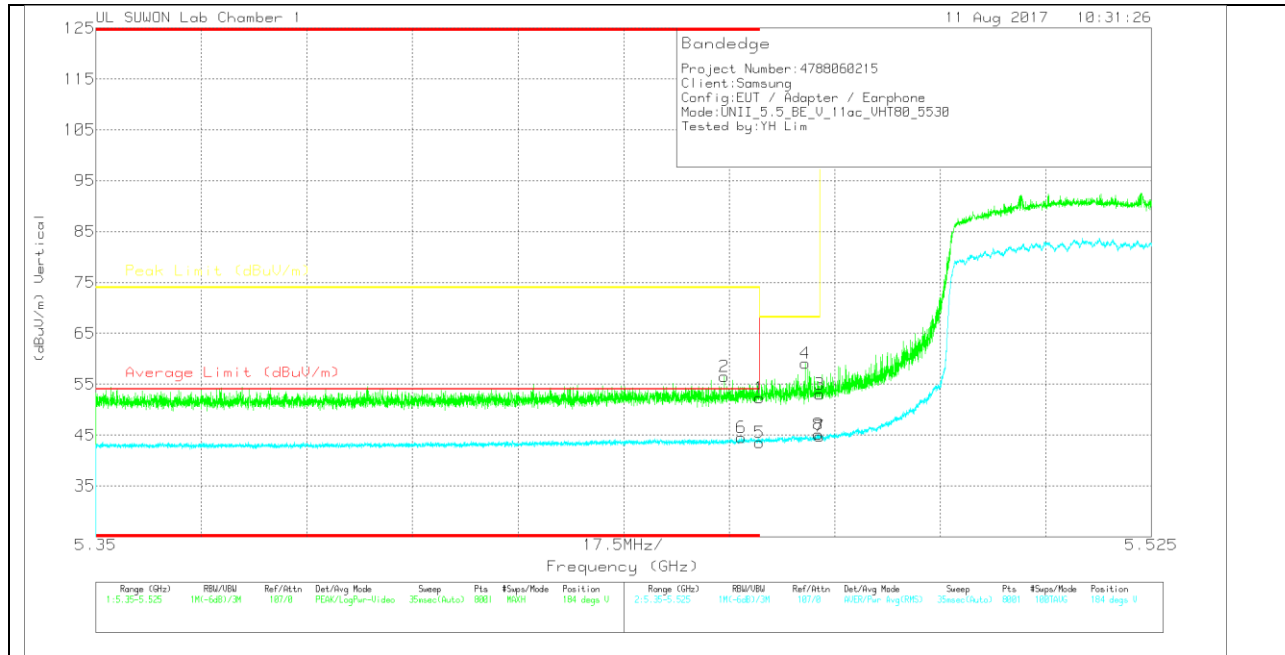

**VERTICAL DATA**

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3 117_001687 17	10dB_ATT(d B)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.54	Pk	34.3	-21.5	0	52.34	-	-	74	-21.66	184	100	V
2	* 5.454	43.74	Pk	34.3	-21.5	0	56.54	-	-	74	-17.46	184	100	V
3	5.47	40.28	Pk	34.3	-21.5	0	53.08	-	-	68.2	-15.12	184	100	V
4	5.468	46.43	Pk	34.3	-21.6	0	59.13	-	-	68.2	-9.07	184	100	V
5	* 5.46	29.66	RMS	34.3	-21.5	1.04	43.5	54	-10.5	-	-	184	100	V
6	* 5.457	30.76	RMS	34.3	-21.6	1.04	44.5	54	-9.5	-	-	184	100	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector


RMS - RMS detection

## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

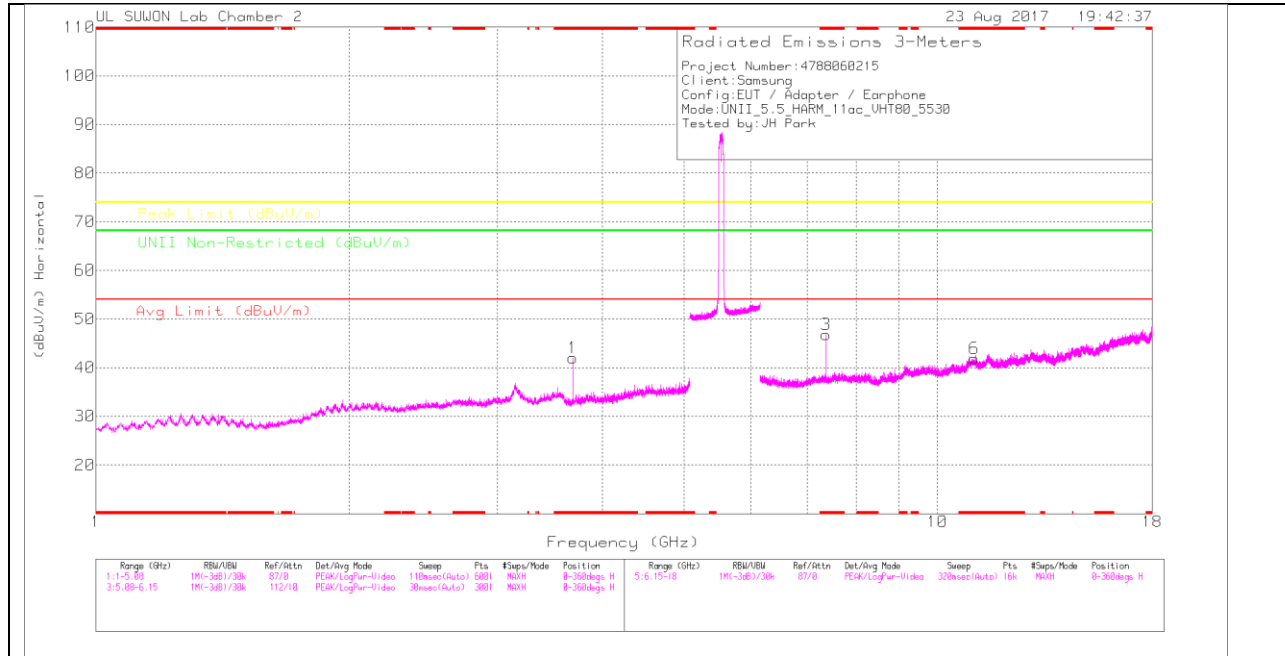

### LOW CHANNEL VERTICAL

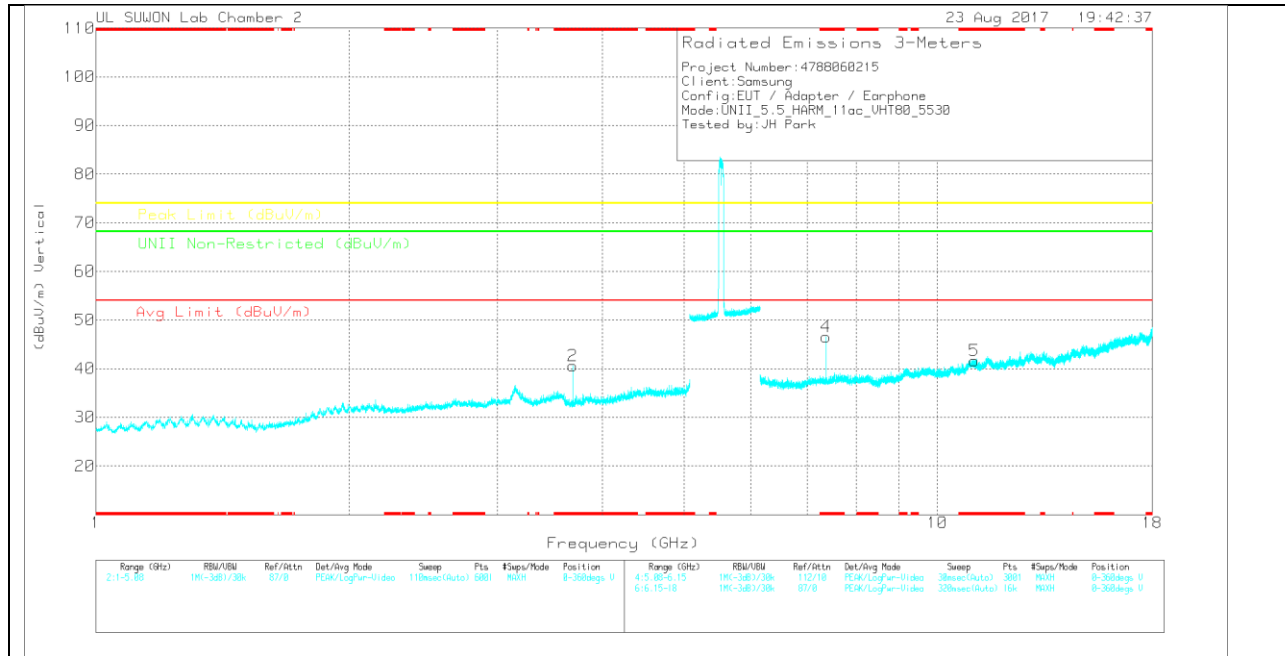

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_31 171001687 24]	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.687	34.89	PK	32.6	-25.5	0	41.99	-	-	74	-32.01	-	-	0-360	250	H
2	* 3.687	33.54	PK	32.6	-25.5	0	40.64	-	-	74	-33.36	-	-	0-360	250	V
3	* 7.373	31.89	PK	35.9	-21	0	46.79	-	-	74	-27.21	-	-	0-360	250	H
6	* 11.062	20.13	PK	37.9	-16.1	0	41.93	-	-	74	-32.07	-	-	0-360	250	H
4	* 7.373	31.67	PK	35.9	-21	0	46.57	-	-	74	-27.43	-	-	0-360	150	V
5	* 11.059	19.88	PK	37.9	-16.2	0	41.58	-	-	74	-32.42	-	-	0-360	150	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117 [00168724]	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.687	42.24	PK-U	32.6	-25.5	0	49.34	-	-	74	-24.66	-	-	10	109	H
* 3.687	35.52	ADR	32.6	-25.5	0	42.62	54	-11.38	-	-	-	-	10	109	H
* 3.687	39.82	PK-U	32.6	-25.5	0	46.92	-	-	74	-27.08	-	-	191	173	V
* 3.687	29.23	ADR	32.6	-25.5	0	36.33	54	-17.67	-	-	-	-	191	173	V
* 7.373	29.8	ADR	35.9	-21	0	44.7	54	-9.3	-	-	-	-	214	135	V
* 7.373	30.72	ADR	35.9	-21	0	45.62	54	-8.38	-	-	-	-	21	142	H
* 7.373	37.33	PK-U	35.9	-21	0	52.23	-	-	74	-21.77	-	-	214	135	V
* 7.374	37.38	PK-U	35.9	-21	0	52.28	-	-	74	-21.72	-	-	21	142	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

**STRADDLE CHANNEL HORIZONTAL**

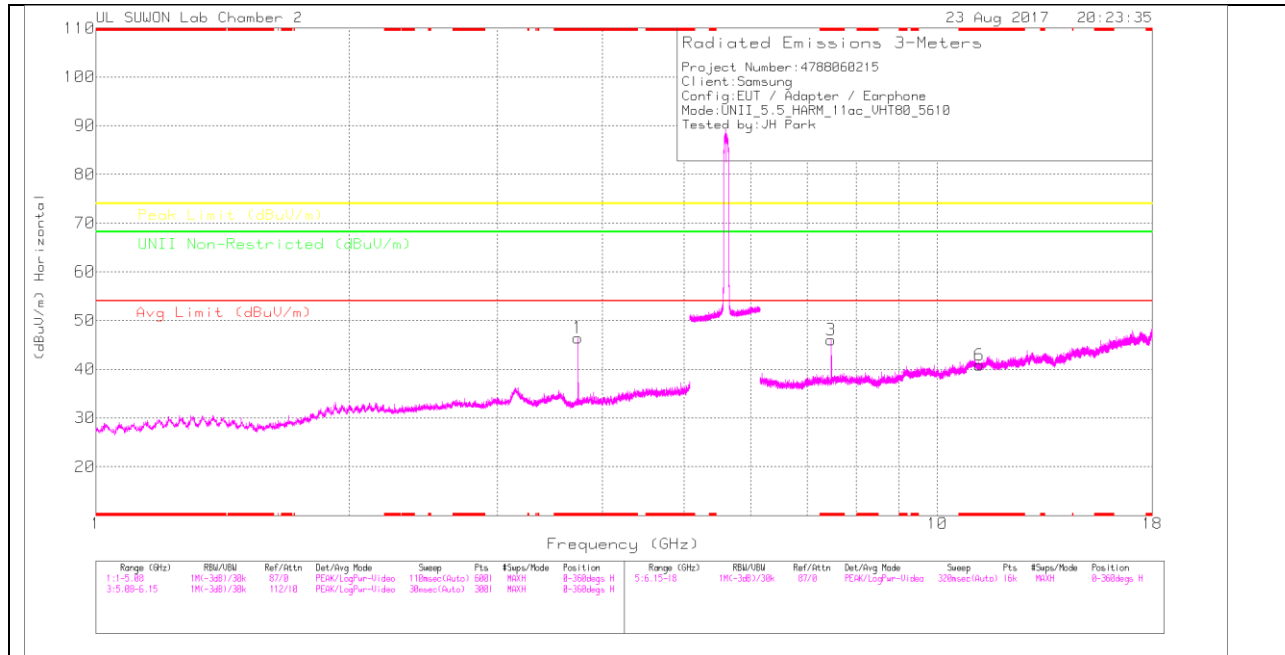

**STRADDLE CHANNEL VERTICAL**

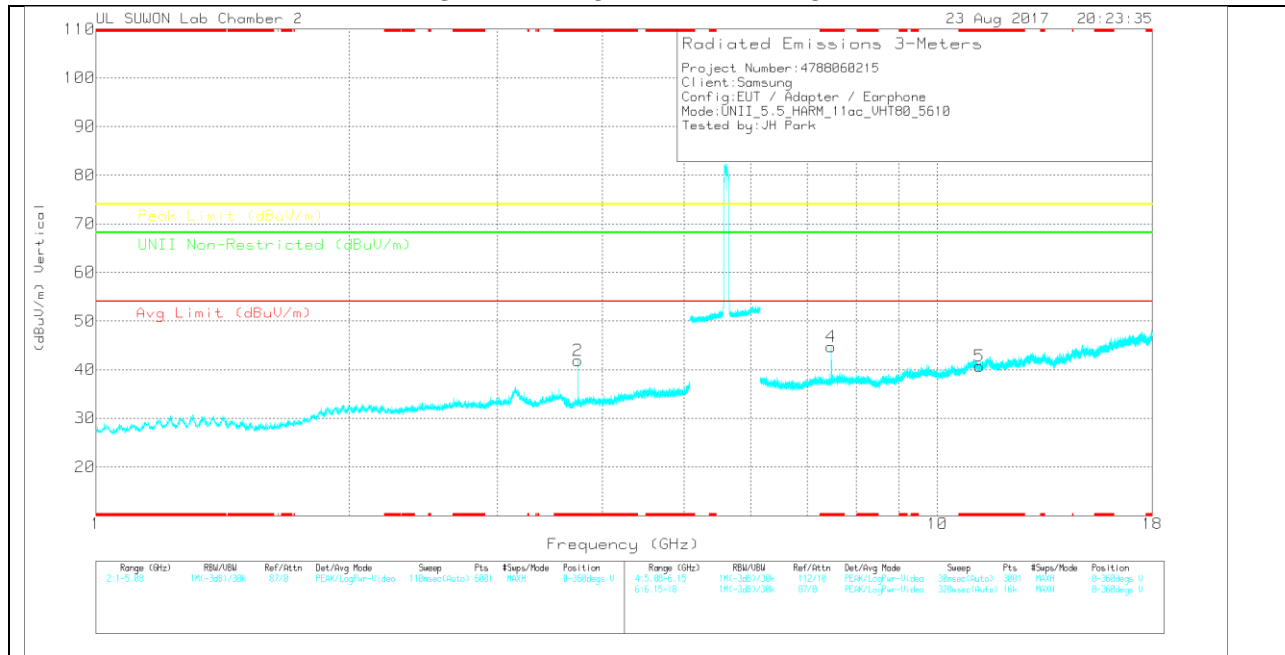

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**STRADDLE CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_31 171001687 24]	5GHz_LP[d B]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.74	39.37	PK	32.8	-25.7	0	46.47	-	-	74	-27.53	-	-	0-360	150	H
2	* 3.74	34.8	PK	32.8	-25.7	0	41.9	-	-	74	-32.1	-	-	0-360	250	V
3	* 7.479	31.26	PK	35.8	-21	0	46.06	-	-	74	-27.94	-	-	0-360	150	H
6	* 11.218	19.18	PK	37.9	-16.2	0	40.88	-	-	74	-33.12	-	-	0-360	150	H
4	* 7.48	29.88	PK	35.8	-21	0	44.68	-	-	74	-29.32	-	-	0-360	150	V
5	* 11.222	18.96	PK	37.9	-16.1	0	40.76	-	-	74	-33.24	-	-	0-360	150	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117 [00168724]	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.74	44.08	PK-U	32.8	-25.7	0	51.18	-	-	74	-22.82	-	-	4	400	H
* 3.74	39.48	ADR	32.8	-25.7	0	46.58	54	-7.42	-	-	-	-	4	400	H
* 3.74	40.88	PK-U	32.8	-25.7	0	47.98	-	-	74	-26.02	-	-	65	111	V
* 3.74	34.49	ADR	32.8	-25.7	0	41.59	54	-12.41	-	-	-	-	65	111	V
* 7.48	31.69	ADR	35.8	-21	0	46.49	54	-7.51	-	-	-	-	210	141	V
* 7.48	30.65	ADR	35.8	-21	0	45.45	54	-8.55	-	-	-	-	352	377	H
* 7.48	38.17	PK-U	35.8	-21	0	52.97	-	-	74	-21.03	-	-	210	141	V
* 7.48	38.19	PK-U	35.8	-21	0	52.99	-	-	74	-21.01	-	-	352	377	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

### 10.4. 5.8 GHz

#### 10.4.1. TX ABOVE 1GHz 802.11a MODE IN THE 5.8GHz BAND BANDEDGE (LOW CHANNEL)

##### HORIZONTAL PEAK PLOT

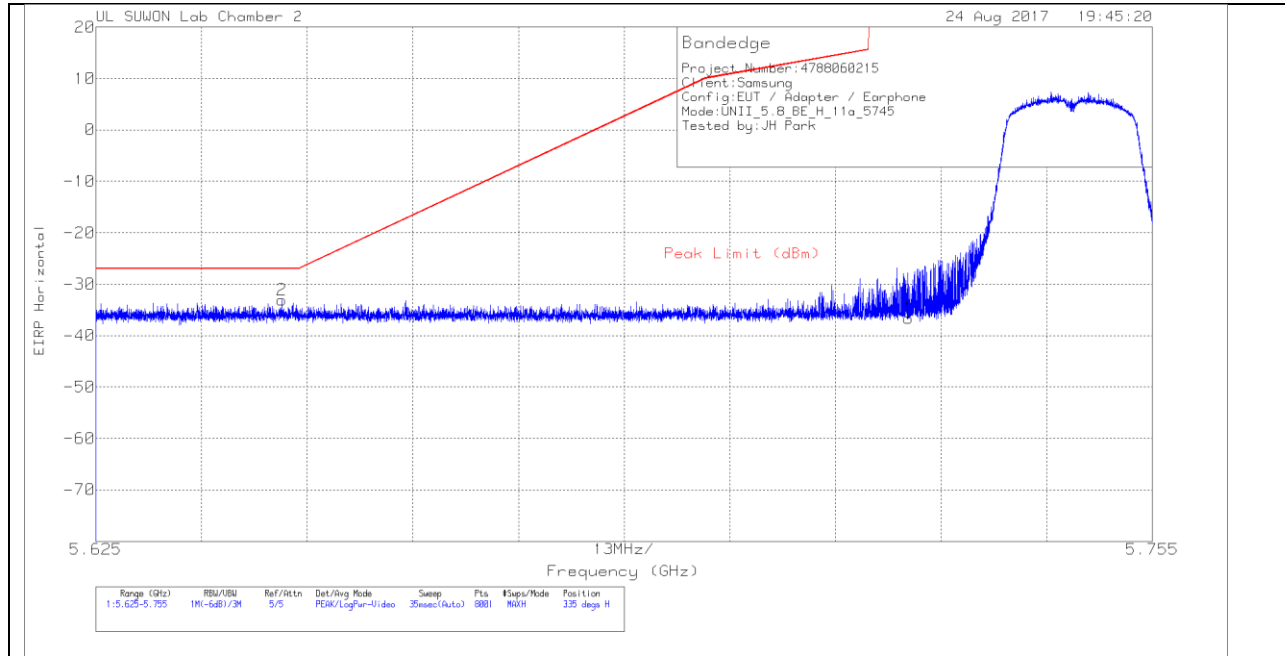


##### HORIZONTAL DATA

###### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3 117[00168 724]	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-67.32	Pk	34.5	-15.6	11.8	0	-36.62	278.26	-314.88	335	398	H
2	5.648	-63.54	Pk	34.4	-15.7	11.8	0	-33.04	-27	-6.04	335	398	H

Pk - Peak detector

**VERTICAL PEAK PLOT**

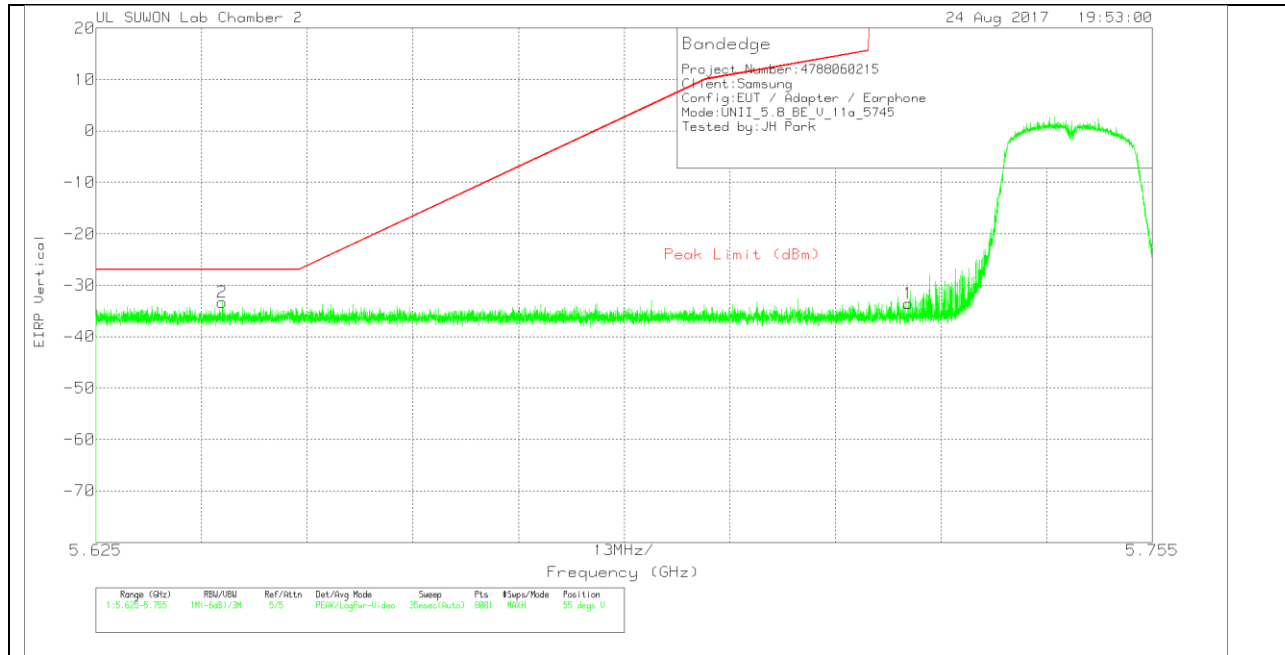

**VERTICAL DATA**


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3 117[00168 724]	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-64.27	Pk	34.5	-15.6	11.8	0	-33.57	278.26	-311.83	55	100	V
2	5.641	-63.85	Pk	34.4	-15.7	11.8	0	-33.35	-27	-6.35	55	100	V

Pk - Peak detector

### BANDEDGE (HIGH CHANNEL)

#### HORIZONTAL PEAK PLOT

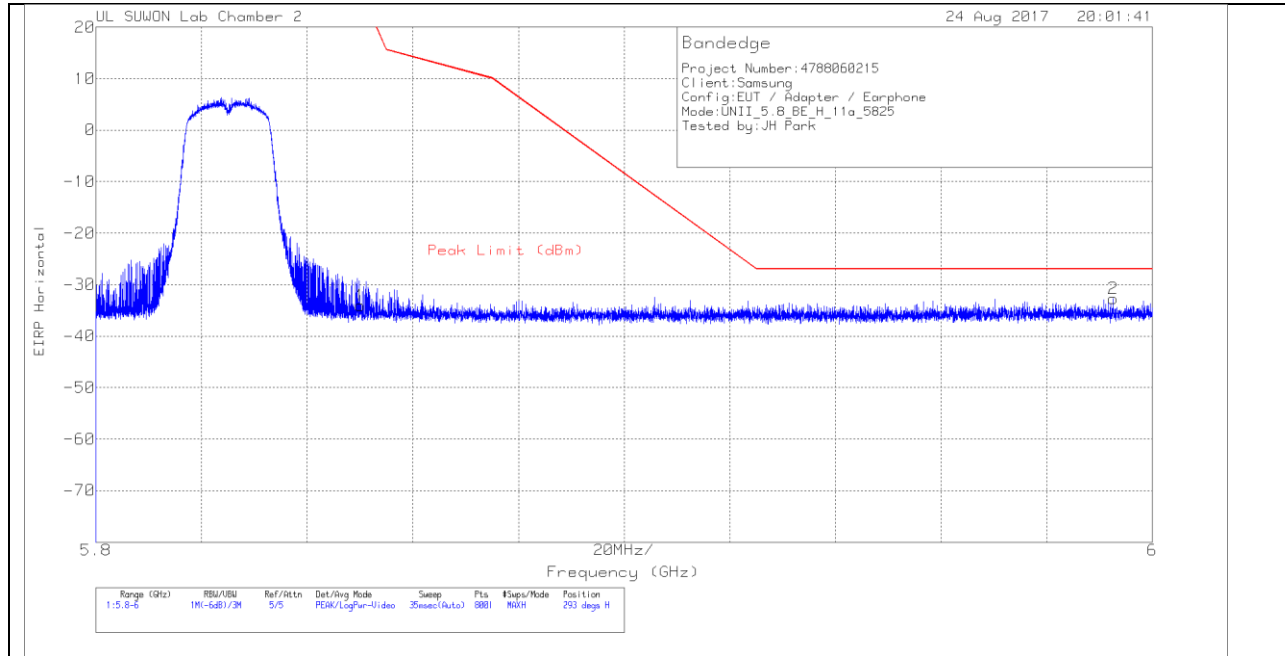


#### HORIZONTAL DATA

##### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3 117[00168 724]	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-64.81	Pk	34.5	-15.5	11.8	0	-34.01	26.94	-60.95	293	139	H
2	5.993	-63.95	Pk	34.8	-15.4	11.8	0	-32.75	-27	-5.75	293	139	H

Pk - Peak detector

**VERTICAL PEAK PLOT**

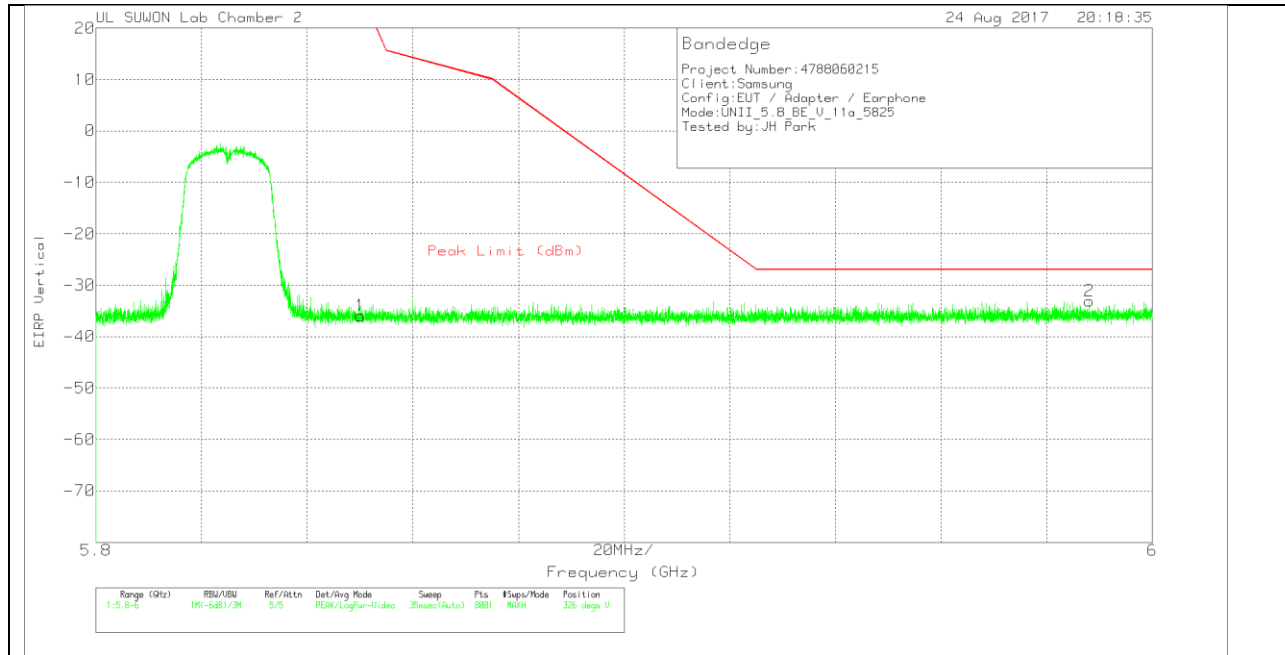


**VERTICAL DATA**

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3 117[00168 724]	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-66.74	Pk	34.5	-15.5	11.8	0	-35.94	26.94	-62.88	326	205	V
2	5.988	-64.25	Pk	34.8	-15.4	11.8	0	-33.05	-27	-6.05	326	205	V

Pk - Peak detector

**LOW CHANNEL HORIZONTAL**

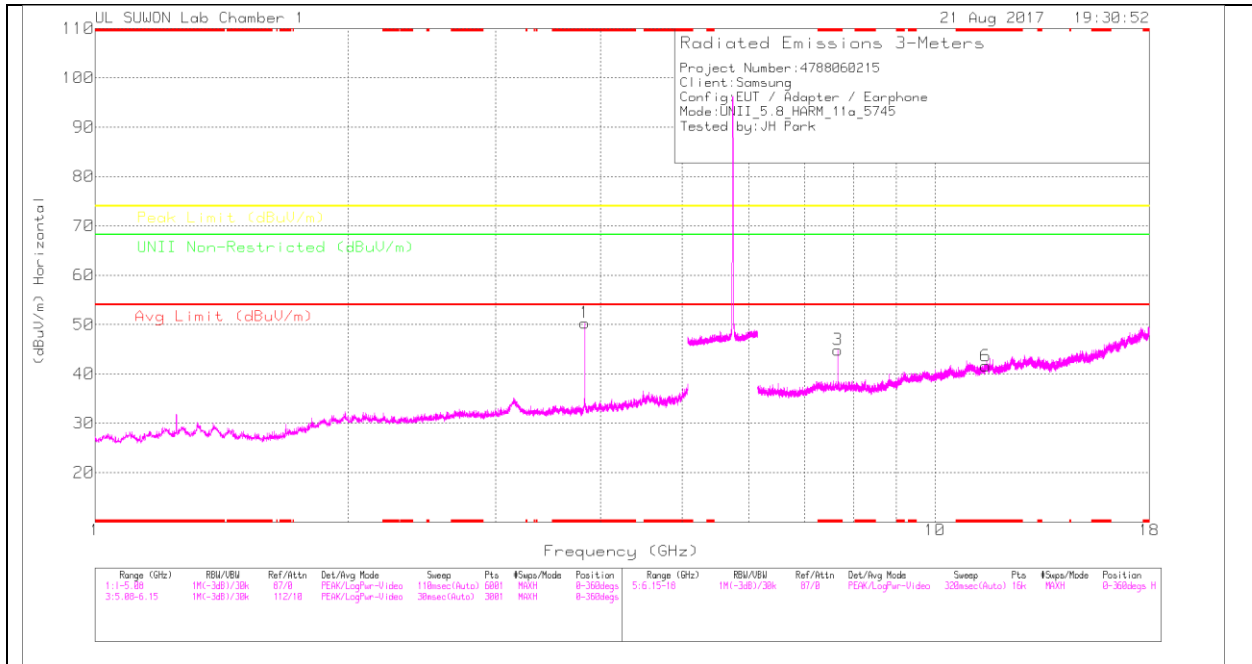

**LOW CHANNEL VERTICAL**

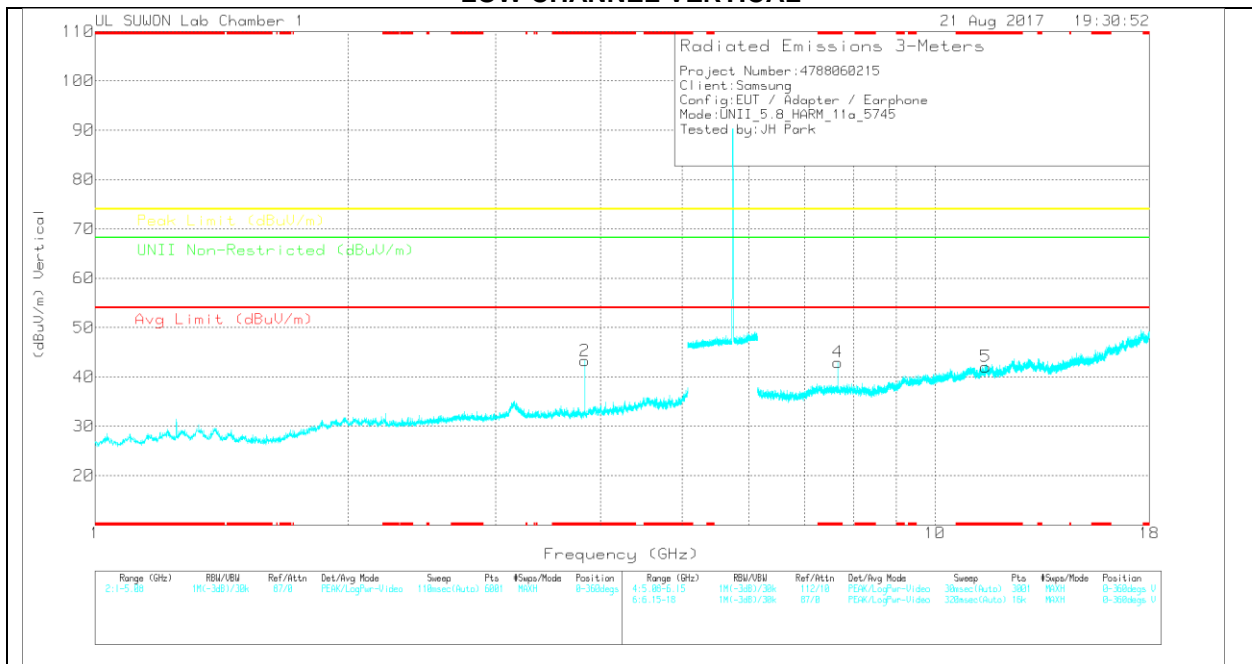

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	5GHz_LP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.83	50.25	PK	33.1	-33	0	50.35	-	-	74	-23.65	-	-	0-360	150	H
2	* 3.83	43.16	PK	33.1	-33	0	43.26	-	-	74	-30.74	-	-	0-360	250	V
3	* 7.659	36.27	PK	35.8	-27.2	0	44.87	-	-	74	-29.13	-	-	0-360	150	H
6	* 11.494	26.24	PK	38.2	-22.8	0	41.64	-	-	74	-32.36	-	-	0-360	250	H
4	* 7.659	34.36	PK	35.8	-27.2	0	42.96	-	-	74	-31.04	-	-	0-360	150	V
5	* 11.492	26.68	PK	38.2	-22.8	0	42.08	-	-	74	-31.92	-	-	0-360	250	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	5GHz_LP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.83	54.16	PK-U	33.1	-33	0	54.26	-	-	74	-19.74	-	-	9	375	H
* 3.83	50.68	ADR	33.1	-33	0	50.78	54	-3.22	-	-	-	-	9	375	H
* 3.83	49.62	PK-U	33.1	-33	0	49.72	-	-	74	-24.28	-	-	204	100	V
* 3.83	44.53	ADR	33.1	-33	0	44.63	54	-9.37	-	-	-	-	204	100	V
* 7.66	31.7	ADR	35.8	-27.1	0	40.4	54	-13.6	-	-	-	-	217	114	V
* 7.66	36.86	ADR	35.8	-27.1	0	45.56	54	-8.44	-	-	-	-	352	312	H
* 7.66	41.11	PK-U	35.8	-27.1	0	49.81	-	-	74	-24.19	-	-	217	114	V
* 7.66	43.74	PK-U	35.8	-27.1	0	52.44	-	-	74	-21.56	-	-	352	312	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL HORIZONTAL

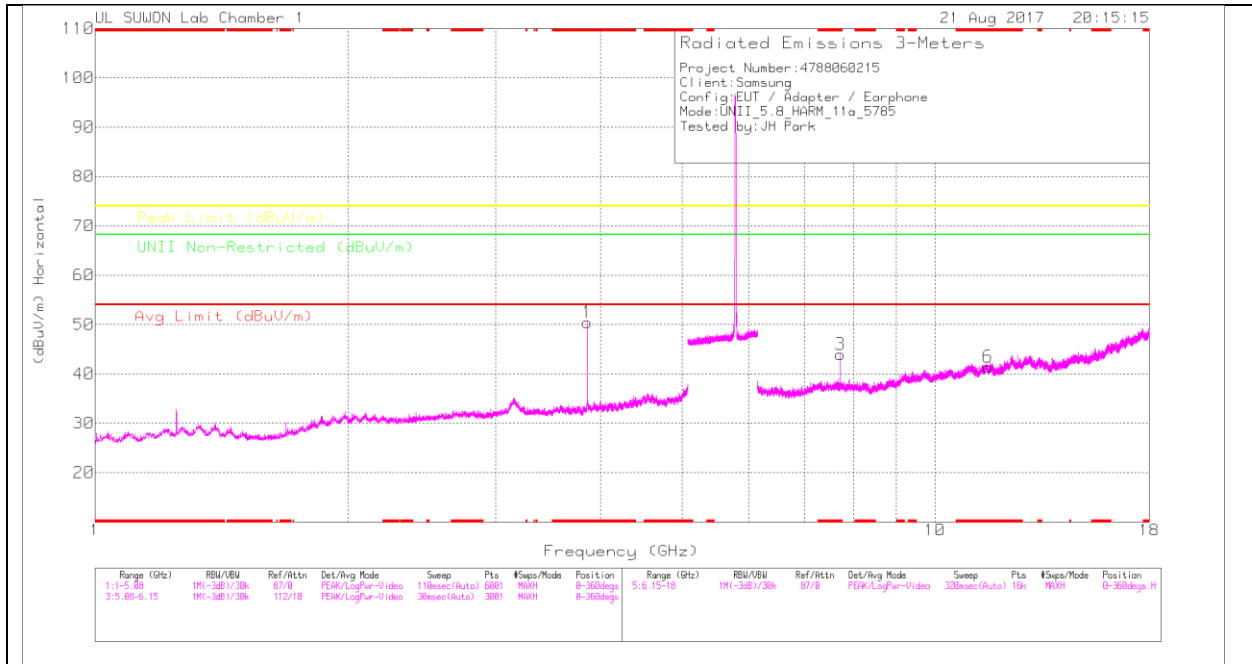

MID CHANNEL VERTICAL

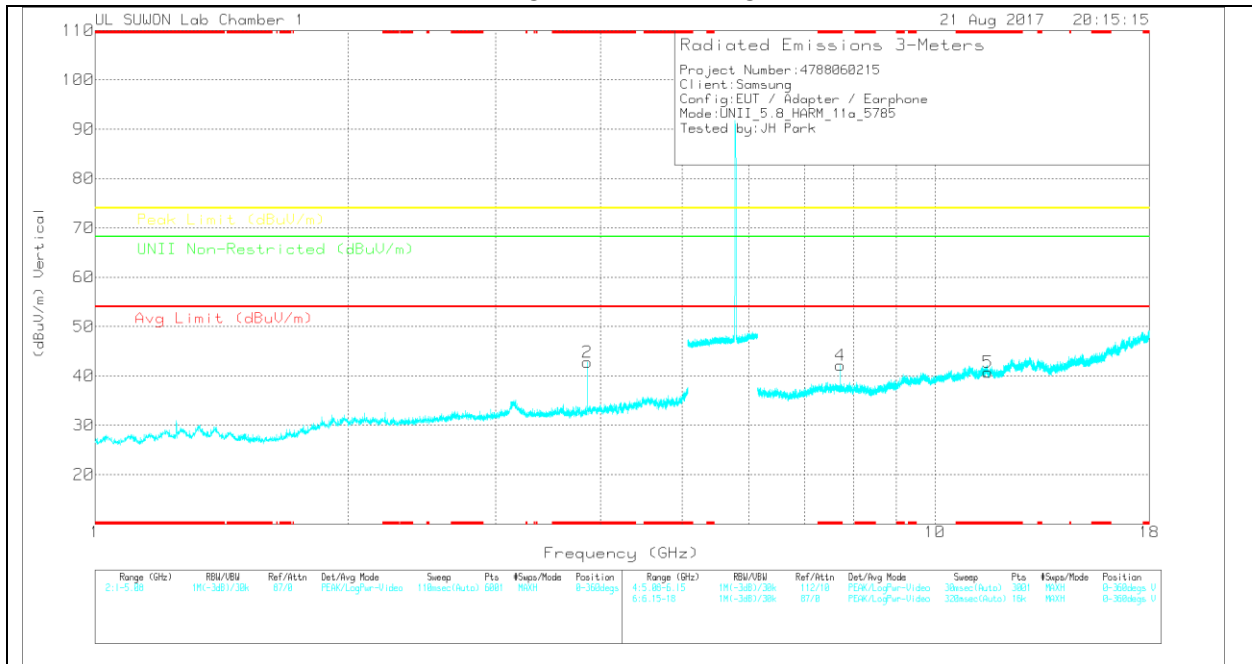

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	5GHz_LP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.857	50.26	PK	33.1	-32.9	0	50.46	-	-	74	-23.54	-	-	0-360	150	H
2	* 3.857	42.55	PK	33.1	-32.9	0	42.75	-	-	74	-31.25	-	-	0-360	250	V
3	* 7.713	35.26	PK	35.7	-27	0	43.96	-	-	74	-30.04	-	-	0-360	250	H
6	* 11.567	26.13	PK	38.2	-22.9	0	41.43	-	-	74	-32.57	-	-	0-360	250	H
4	* 7.713	33.43	PK	35.7	-27	0	42.13	-	-	74	-31.87	-	-	0-360	150	V
5	* 11.57	25.43	PK	38.2	-22.9	0	40.73	-	-	74	-33.27	-	-	0-360	150	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_00168717	5GHz_LP(dB)_170809	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.857	54.31	PK-U	33.1	-32.9	0	54.51	-	-	74	-19.49	-	-	7	372	H
* 3.857	50.21	ADR	33.1	-32.9	0	50.41	54	-3.59	-	-	-	-	7	372	H
* 3.857	49.34	PK-U	33.1	-32.9	0	49.54	-	-	74	-24.46	-	-	87	380	V
* 3.857	44.07	ADR	33.1	-32.9	0	44.27	54	-9.73	-	-	-	-	87	380	V
* 7.713	33.12	ADR	35.7	-27	0	41.82	54	-12.18	-	-	-	-	212	108	V
* 7.713	35.99	ADR	35.7	-27	0	44.69	54	-9.31	-	-	-	-	352	306	H
* 7.713	41.67	PK-U	35.7	-27	0	50.37	-	-	74	-23.63	-	-	212	108	V
* 7.713	43.9	PK-U	35.7	-27	0	52.6	-	-	74	-21.4	-	-	352	306	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

### HIGH CHANNEL HORIZONTAL

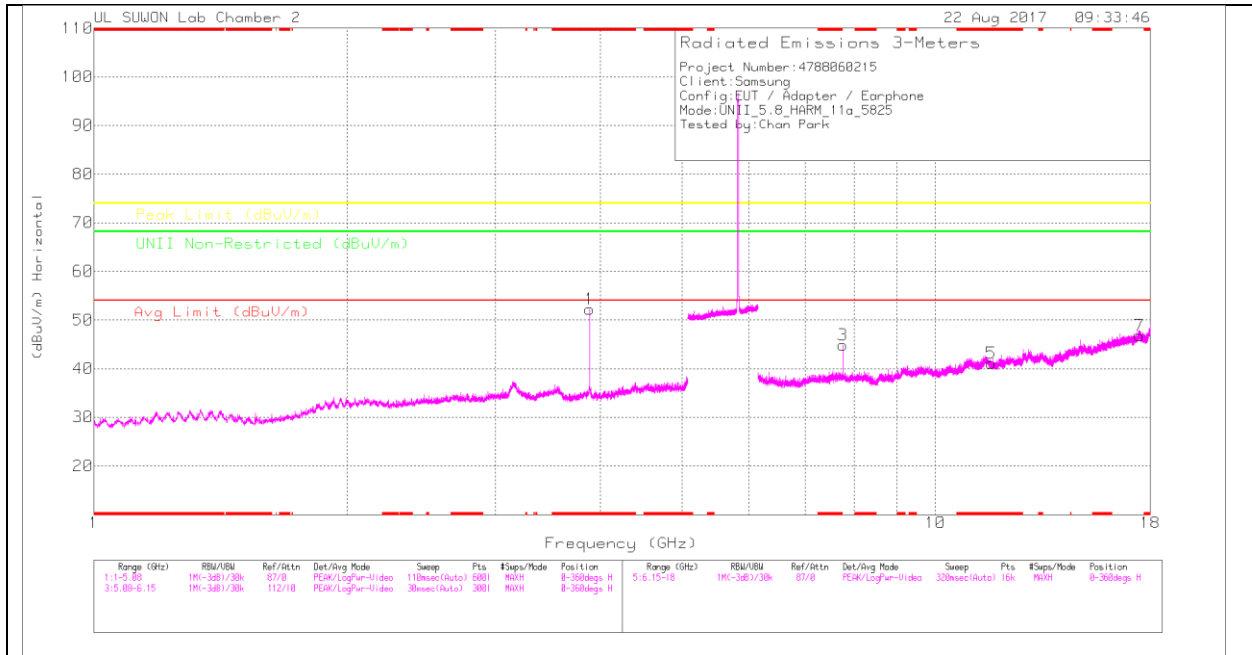

### HIGH CHANNEL VERTICAL

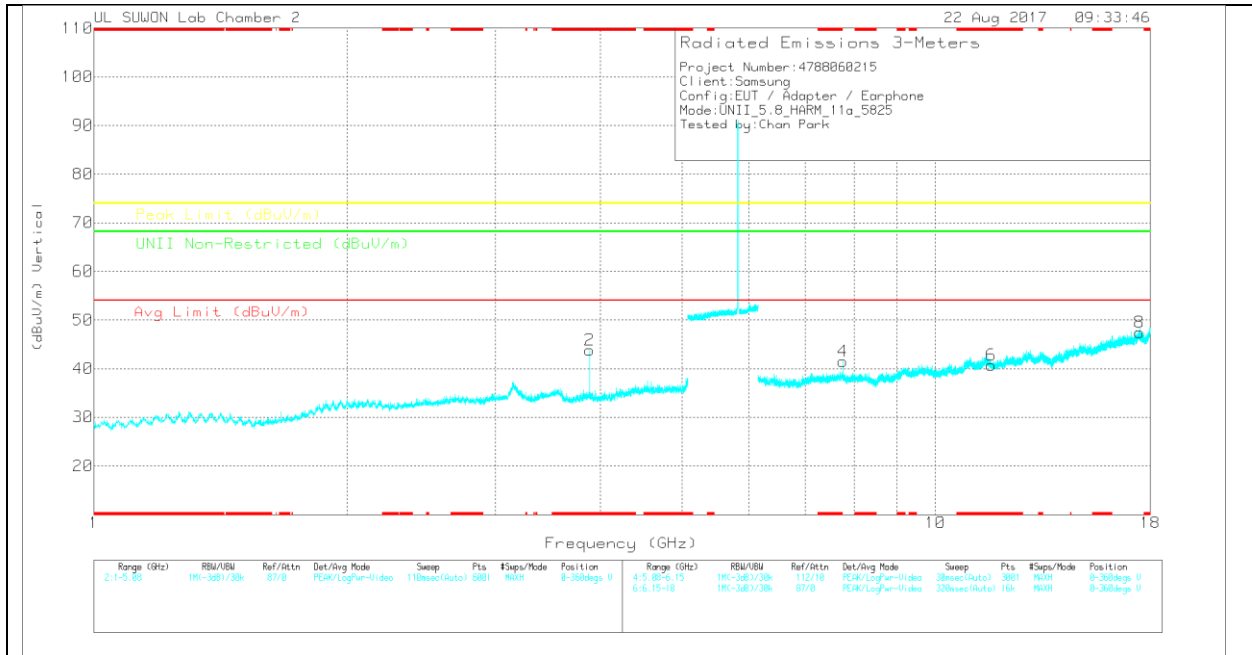

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_31 17[001687 24]	5GHz_LP[d B]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.883	43.77	PK	33.1	-24.7	0	52.17	-	-	74	-21.83	-	-	0-360	150	H
2	* 3.884	35.38	PK	33.1	-24.7	0	43.78	-	-	74	-30.22	-	-	0-360	250	V
3	7.766	29.26	PK	35.8	-20.2	0	44.86	-	-	-	-	68.2	-23.34	0-360	250	H
5	* 11.65	18.75	PK	38.1	-15.7	0	41.15	-	-	74	-32.85	-	-	0-360	250	H
7	17.473	17.75	PK	41.3	-12.2	0	46.85	-	-	-	-	68.2	-21.35	0-360	150	H
4	7.766	25.89	PK	35.8	-20.2	0	41.49	-	-	-	-	68.2	-26.71	0-360	150	V
6	* 11.65	18.35	PK	38.1	-15.7	0	40.75	-	-	74	-33.25	-	-	0-360	250	V
8	17.47	18.52	PK	41.3	-12.4	0	47.42	-	-	-	-	68.2	-20.78	0-360	250	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117 [00168724]	5GHz_LP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.883	46.03	PK-U	33.1	-24.7	0	54.43	-	-	74	-19.57	-	-	3	394	H
* 3.883	42.46	ADR	33.1	-24.7	0	50.86	54	-3.14	-	-	-	-	3	394	H
* 3.883	41.11	PK-U	33.1	-24.7	0	49.51	-	-	74	-24.49	-	-	71	114	V
* 3.883	34.89	ADR	33.1	-24.7	0	43.29	54	-10.71	-	-	-	-	71	114	V
7.767	37.01	PK-U	35.8	-20.3	0	52.51	-	-	-	-	68.2	-15.69	355	345	H
7.767	35.95	PK-U	35.8	-20.3	0	51.45	-	-	-	-	68.2	-16.75	203	123	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

### 10.4.2. TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.8GHz BAND BANDEDGE (LOW CHANNEL)

#### HORIZONTAL PEAK PLOT

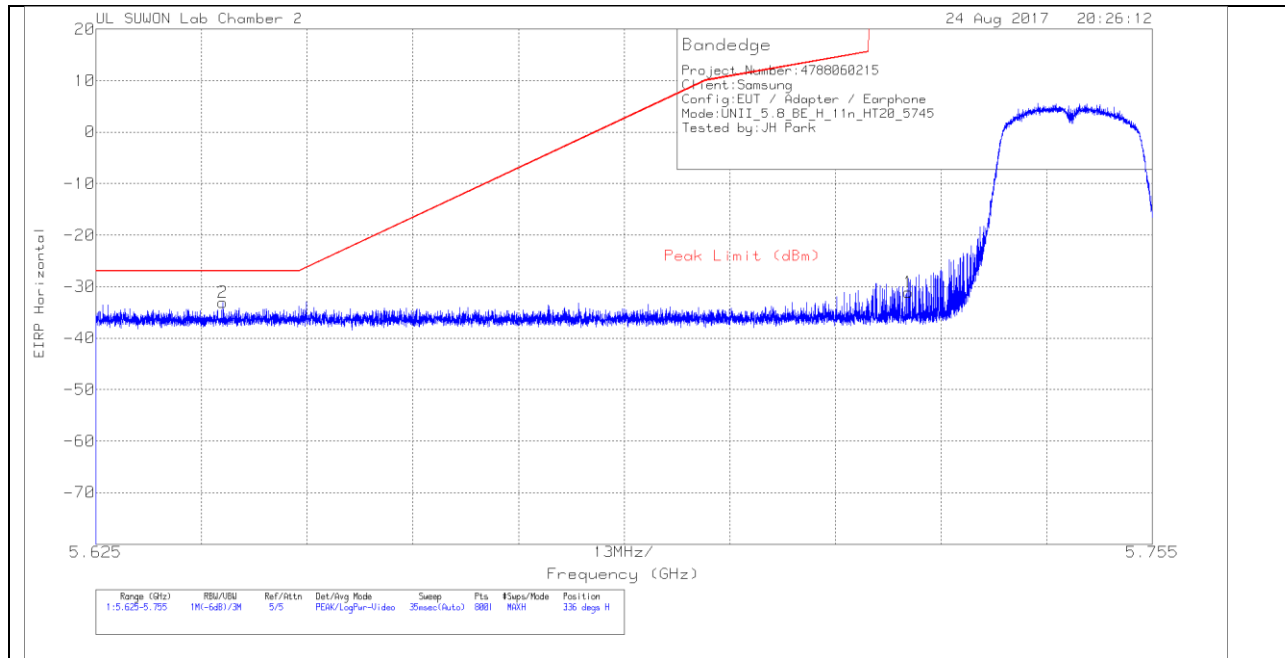


#### HORIZONTAL DATA

##### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3 117[00168724]	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-61.77	Pk	34.5	-15.6	11.8	0	-31.07	278.26	-309.33	336	400	H
2	5.641	-63.6	Pk	34.4	-15.7	11.8	0	-33.1	-27	-6.1	336	400	H

Pk - Peak detector

**VERTICAL PEAK PLOT**

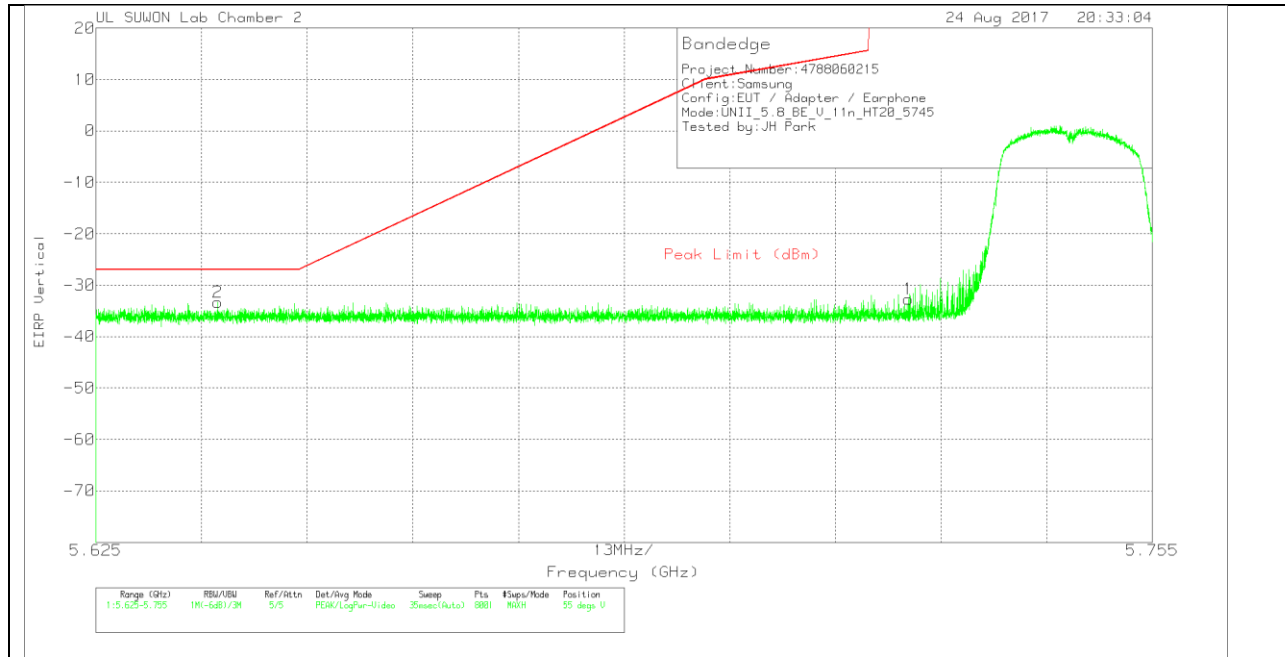

**VERTICAL DATA**


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3 117[00168 724]	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-63.35	Pk	34.5	-15.6	11.8	0	-32.65	278.26	-310.91	55	100	V
2	5.64	-63.78	Pk	34.4	-15.7	11.8	0	-33.28	-27	-6.28	55	100	V

Pk - Peak detector

### BANDEDGE (HIGH CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

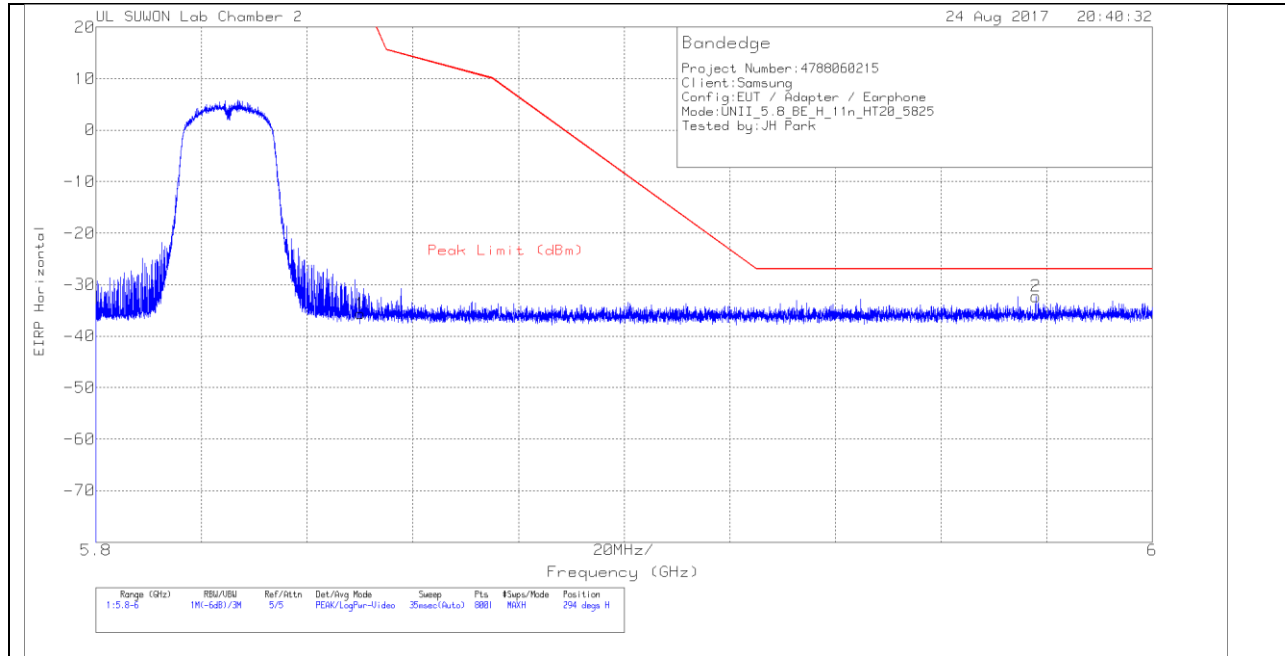


#### HORIZONTAL DATA

##### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3 117[00168 724]	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-66.48	Pk	34.5	-15.5	11.8	0	-35.68	26.94	-62.62	294	140	H
2	5.978	-63.37	Pk	34.7	-15.4	11.8	0	-32.27	-27	-5.27	294	140	H

Pk - Peak detector

**VERTICAL PEAK PLOT**

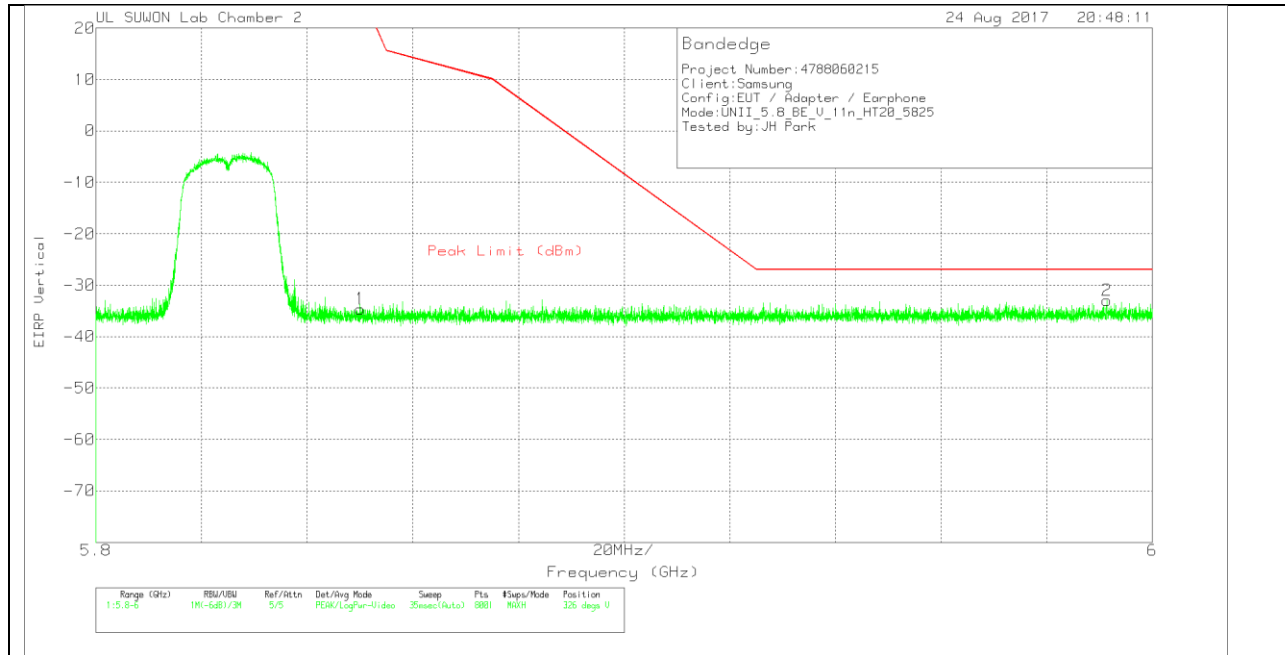

**VERTICAL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3 117[00168 724]	Path_2_10 dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-65.4	Pk	34.5	-15.5	11.8	0	-34.6	26.94	-61.54	326	283	V
2	5.991	-64.13	Pk	34.8	-15.4	11.8	0	-32.93	-27	-5.93	326	283	V

Pk - Peak detector