



FCC RF Test Report

APPLICANT : Samsung Electronics Co., Ltd.
EQUIPMENT : Tablet PC
BRAND NAME : SAMSUNG
MODEL NAME : SM-T555C
FCC ID : A3LSMT555C
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Mar. 19, 2015 and testing was completed on Apr. 16, 2015. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

**1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,
Nanshan District, Shenzhen, Guangdong, P. R. China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test 5

 1.5 Modification of EUT 6

 1.6 Testing Location 6

 1.7 Applicable Standards 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1 Carrier Frequency and Channel 8

 2.2 Pre-Scanned RF Power 9

 2.3 Test Mode 10

 2.4 Connection Diagram of Test System 11

 2.5 Support Unit used in test configuration and system 12

 2.6 EUT Operation Test Setup 12

 2.7 Measurement Results Explanation Example 13

3 TEST RESULT 14

 3.1 6dB Bandwidth Measurement 14

 3.2 Maximum Conducted Output Power Measurement 16

 3.3 Power Spectral Density Measurement 17

 3.4 Unwanted Emissions Measurement 20

 3.5 AC Conducted Emission Measurement 24

 3.6 Frequency Stability Measurement 28

 3.7 Automatically Discontinue Transmission 29

 3.8 Antenna Requirements 30

4 LIST OF MEASURING EQUIPMENT 31

5 UNCERTAINTY OF EVALUATION 32

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED TEST RESULTS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	≤ -17, -27 dBm/MHz & 15.209(a)	Pass	Under limit 2.05 dB at 5713.960 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 15.36 dB at 0.440 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Samsung Electronics Co., Ltd.

No.9 WeiWu Rd., Micro Electronic Industrial Park, Jingang Highway, Xiqing District, Tianjin, China

1.2 Manufacturer

Samsung Electronics Co., Ltd.

No.9 WeiWu Rd., Micro Electronic Industrial Park, Jingang Highway, Xiqing District, Tianjin, China

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Tablet PC
Brand Name	SAMSUNG
Model Name	SM-T555C
FCC ID	A3LSMT555C
GSM Operating Band(s)	GSM900/1800 (non-US bands) GSM1900/850MHz (US bands)
GPRS/EGPRS Multi-slot Class	GPRS Class 33, EGPRS Class 33
WCDMA Operating Band(s)	FDD Band I/VIII (non-US bands) FDD Band II/V (US bands)
LTE Operating Band(s)	FDD Band 1/3/8/28 (non-US bands) TDD Band 41 (US band)
Wi-Fi Specification	2.4GHz 802.11b/g/n HT20 5GHz 802.11a/n HT20/HT40
ANT+ Specification	2.4GHz
Bluetooth Version	Bluetooth v3.0 + EDR / Bluetooth v4.0 LE
IMEI Code	Conducted: 354377050002652 Radiated: 354377050003239 Conduction: 354377050002652
HW Version	REV1.0
SW Version	T555C.001
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	5725 MHz ~ 5825 MHz
Maximum Output Power	802.11a : 7.27 dBm / 0.0053 W 802.11n HT20 : 7.34 dBm / 0.0054 W 802.11n HT40 : 8.00 dBm / 0.0063 W
Antenna Type / Gain	FPCB Antenna with gain -2.02 dBi
Type of Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	
	TH01-SZ	CO01-SZ

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398	
Test Site No.	Sporton Site No.	FCC Registration No.
	03CH01-SZ	831040

Note: The test site complies with ANSI C63.4 2009 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table above 1 GHz as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.



2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5825 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151	5755	159	5795
	153	5765	161	5805

Note: The above Frequency and Channel in boldface were 802.11n HT40.



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

WLAN 5GHz 802.11a Output Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps								
CH 149	5745	7.17	CH 161	7.21	7.17	7.19	7.13	7.18	7.19	7.10
CH 157	5785	7.12								
CH 161	5805	7.27								

WLAN 5GHz 802.11n-HT20 Output Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 149	5745	7.26	CH 161	7.33	7.31	7.29	7.32	7.26	7.23	7.20
CH 157	5785	7.23								
CH 161	5805	7.34								

WLAN 5GHz 802.11n-HT40 Output Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0								
CH 151	5755	8.00	CH 151	7.95	7.91	7.87	7.88	7.80	7.85	7.86
CH 159	5795	7.77								



2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.


Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

AC Conducted Emission	Mode 1 : GSM1900 Idle + Bluetooth Link + WLAN (5GHz) Link + USB Cable (Charging from Adapter) + Earphone
Remark: For Radiated TCs, the tests were performed with adapter, earphone and USB cable.	


Ch. #		Band IV : 5725-5825 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	149	149	151
M	Middle	157	157	-
H	High	161	161	159

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

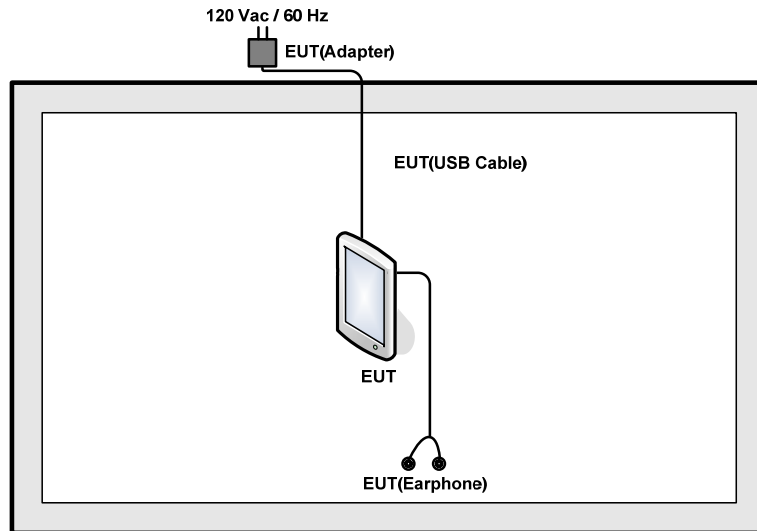

<AC Conducted Emission Mode>

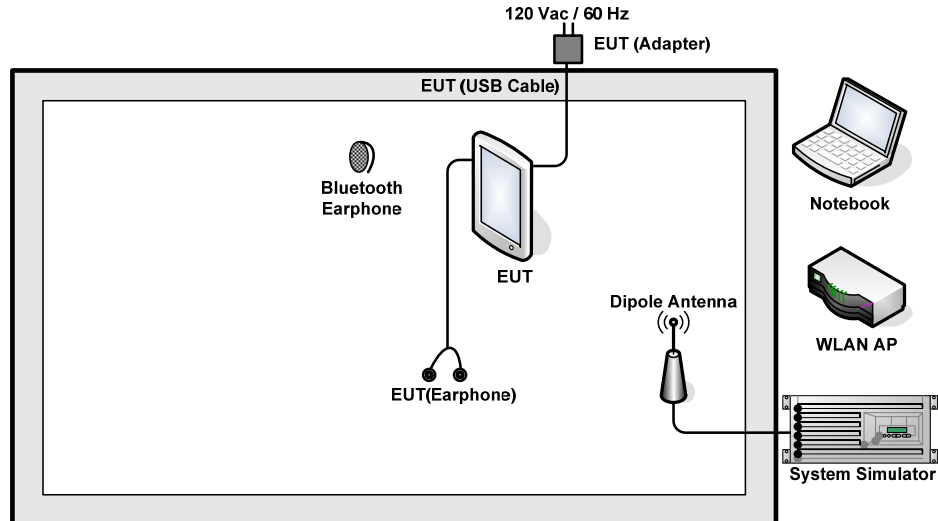



2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMW 500	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-815	KA2DIR815A1	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-108	PYAHS-107W	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 20.5 dB.

Offset (dB) = RF cable loss (dB) = 20.5 (dB)

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Description of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

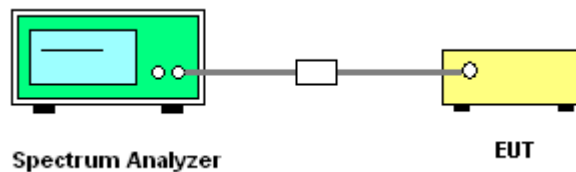



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

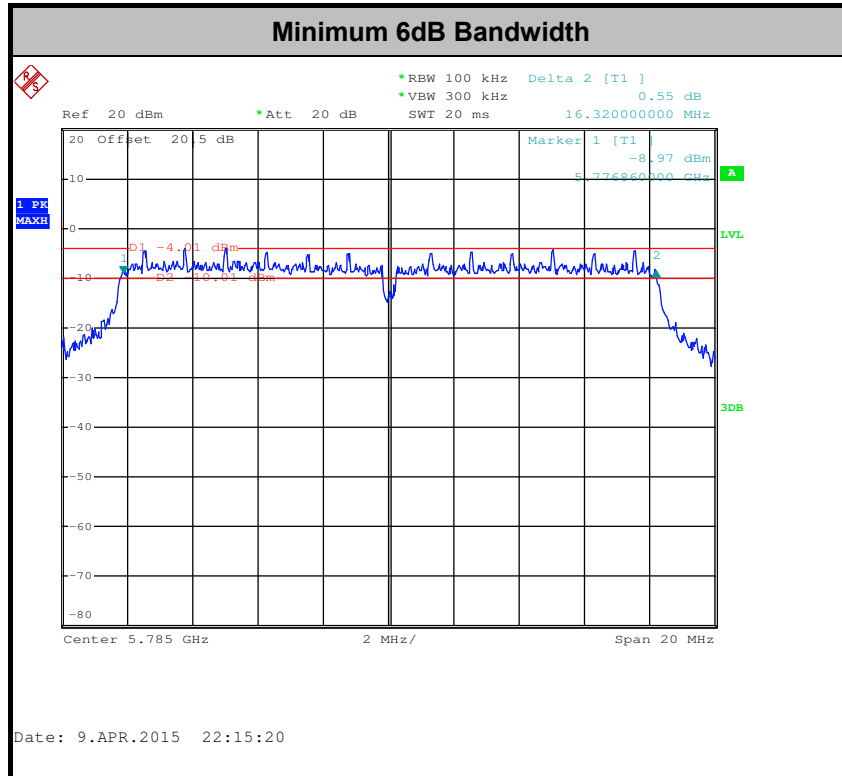

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

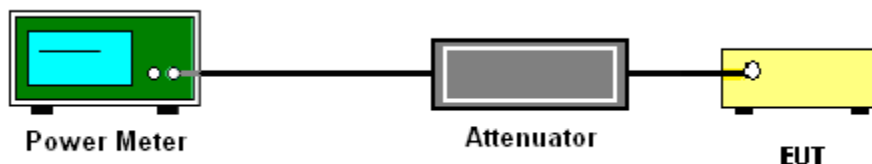

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01. Section F) Maximum power spectral density.


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. The testing follows Method SA-2 of FCC KDB 789033 D01 General UNII Test Procedures v01r03.
 - Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300 kHz.
 - Set VBW \geq 1 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.


3.3.4 Test Setup

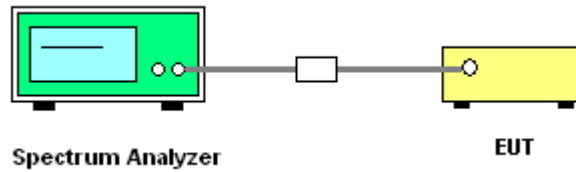



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

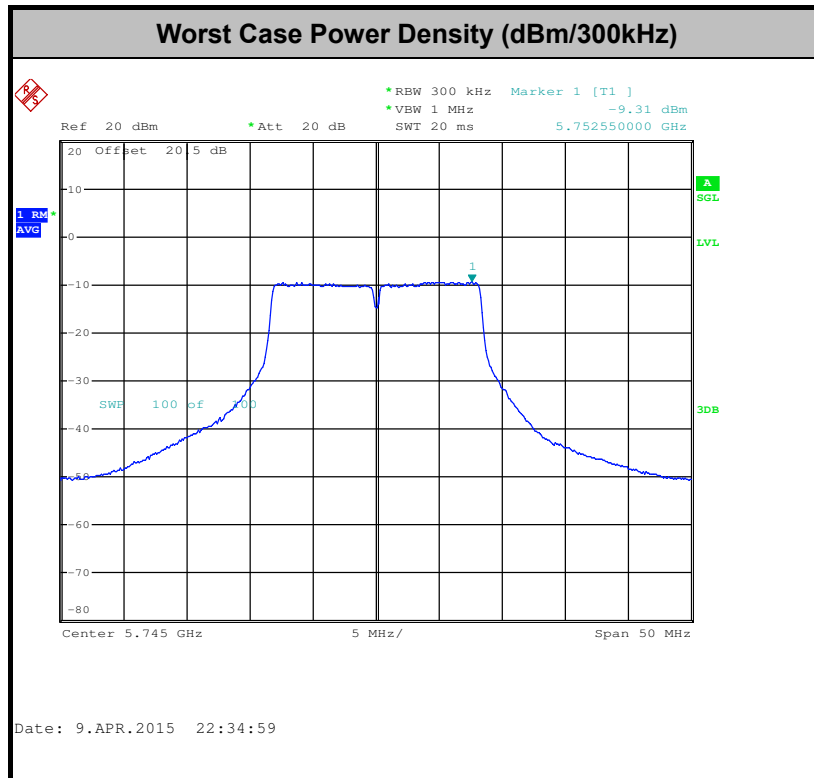



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5725-5850 MHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBμV/m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBμV/m).
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB789033 v01r03 H)2)c)(i) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.



3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle (%)	T(μs)	1/T(kHz)	VBW Setting
802.11a	93.33	1.40	0.71	1kHz
802.11n HT20	92.97	1.30	0.77	1kHz
802.11n HT40	86.99	0.64	1.56	3kHz


2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

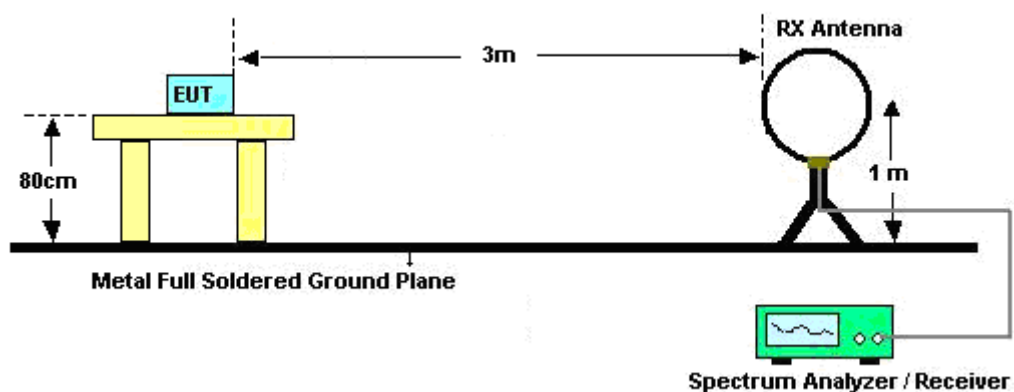

For radiated emissions from 30MHz to 1GHz

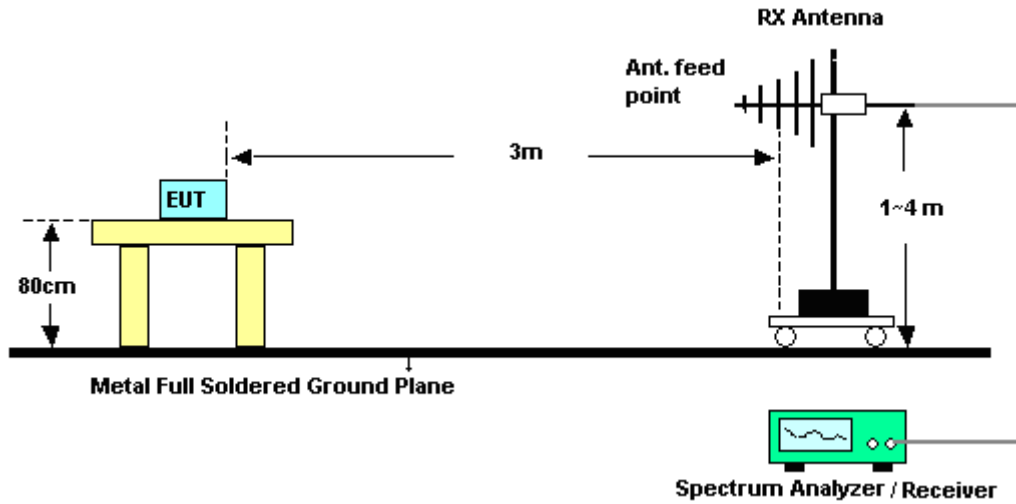

For radiated emissions above 1GHz

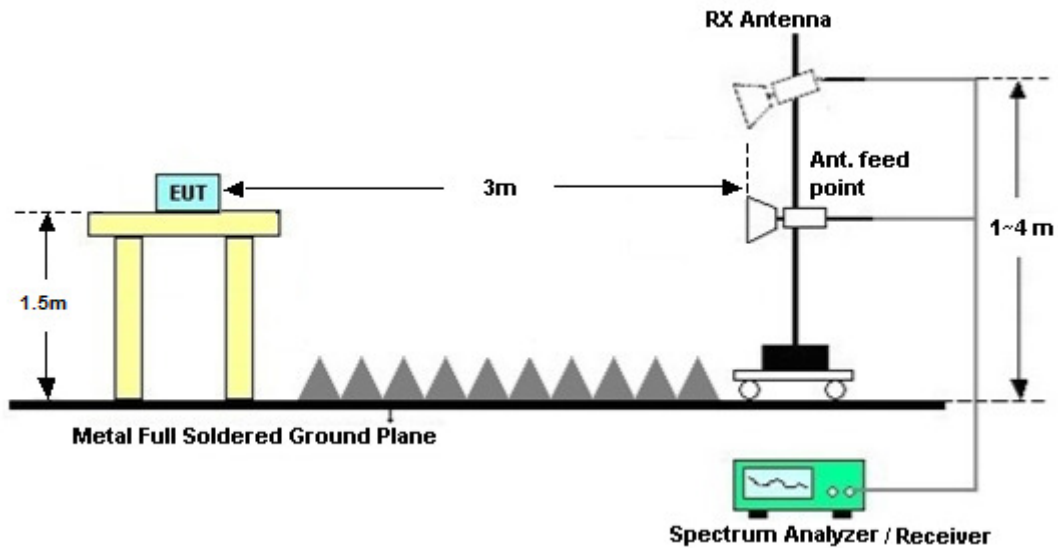

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix B.

3.4.7 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.5.4 Test Setup

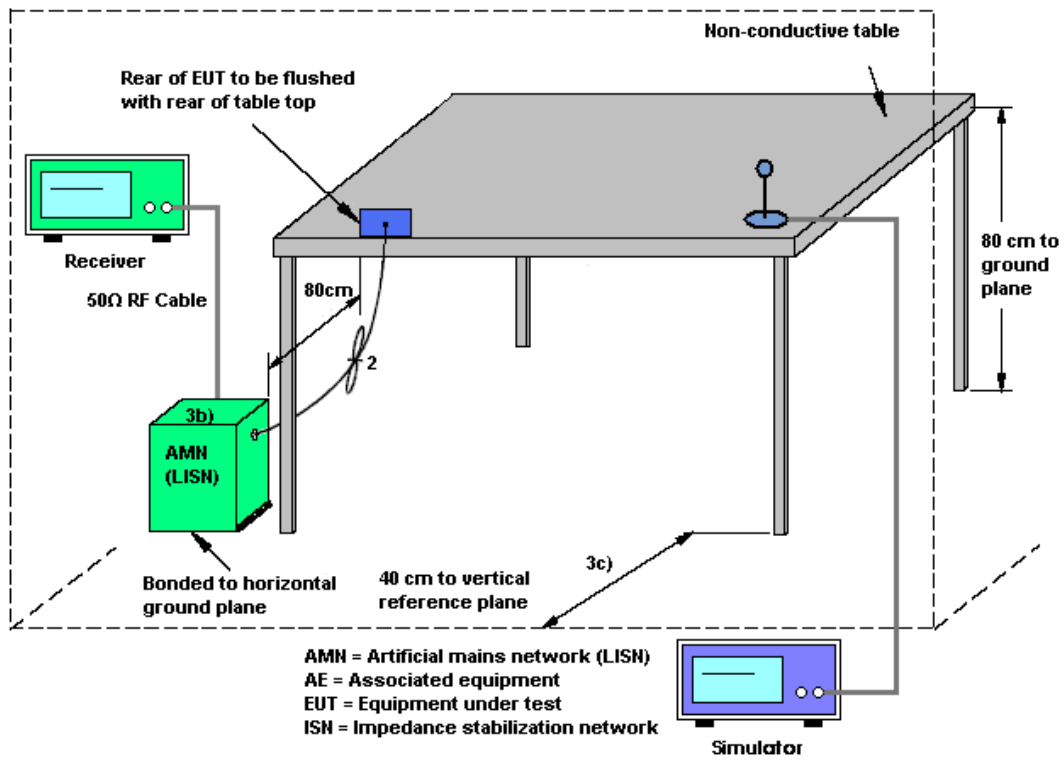



3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Jack Tian	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN (5GHz) Link + USB Cable (Charging from Adapter) + Earphone		

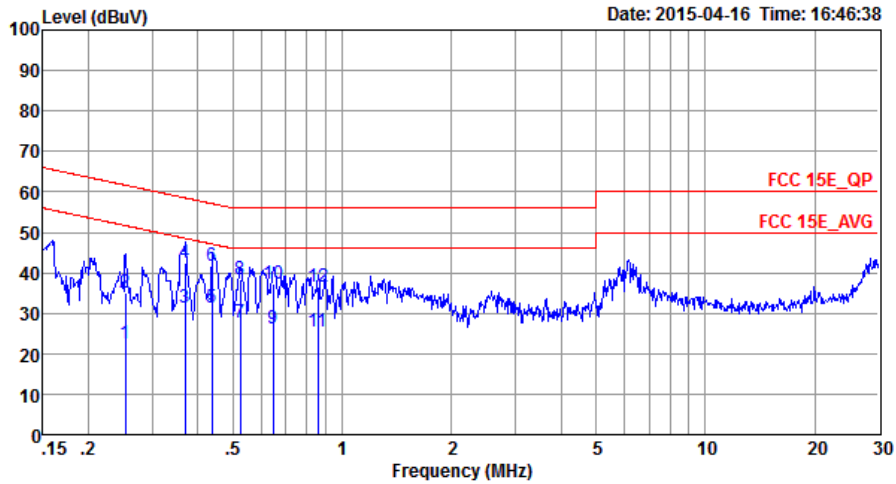


Site : C001-SZ
 Condition: FCC 15E_QP LISN_L_20140304 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.25	22.48	-29.16	51.64	12.00	0.24	10.24	Average
2	0.25	35.18	-26.46	61.64	24.70	0.24	10.24	QP
3	0.37	31.35	-17.17	48.52	20.90	0.27	10.18	Average
4	0.37	42.35	-16.17	58.52	31.90	0.27	10.18	QP
5	0.44	31.35	-15.76	47.11	20.90	0.29	10.16	Average
6 *	0.44	41.75	-15.36	57.11	31.30	0.29	10.16	QP
7	0.52	27.74	-18.26	46.00	17.31	0.28	10.15	Average
8	0.52	38.34	-17.66	56.00	27.91	0.28	10.15	QP
9	0.64	26.36	-19.64	46.00	16.00	0.21	10.15	Average
10	0.64	37.26	-18.74	56.00	26.90	0.21	10.15	QP
11	0.86	25.38	-20.62	46.00	15.00	0.23	10.15	Average
12	0.86	36.58	-19.42	56.00	26.20	0.23	10.15	QP



Test Mode :	Mode 1	Temperature :	21~23°C
Test Engineer :	Jack Tian	Relative Humidity :	41~43%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN (5GHz) Link + USB Cable (Charging from Adapter) + Earphone		

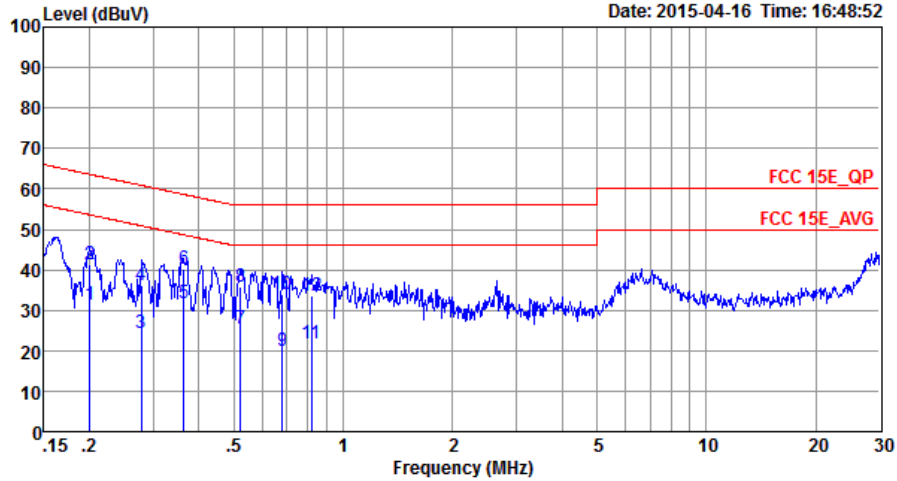

Site : CO01-SZ
 Condition: FCC 15E_QP LISN_N_20140304 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.20	31.31	-22.27	53.58	20.70	0.32	10.29	Average
2	0.20	41.41	-22.17	63.58	30.80	0.32	10.29	QP
3	0.28	24.27	-26.63	50.90	13.70	0.35	10.22	Average
4	0.28	36.27	-24.63	60.90	25.70	0.35	10.22	QP
5 *	0.36	31.86	-16.79	48.65	21.30	0.38	10.18	Average
6	0.36	40.36	-18.29	58.65	29.80	0.38	10.18	QP
7	0.52	25.35	-20.65	46.00	14.81	0.39	10.15	Average
8	0.52	35.95	-20.05	56.00	25.41	0.39	10.15	QP
9	0.68	20.02	-25.98	46.00	9.60	0.27	10.15	Average
10	0.68	33.82	-22.18	56.00	23.40	0.27	10.15	QP
11	0.82	21.93	-24.07	46.00	11.50	0.28	10.15	Average
12	0.82	33.73	-22.27	56.00	23.30	0.28	10.15	QP

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup

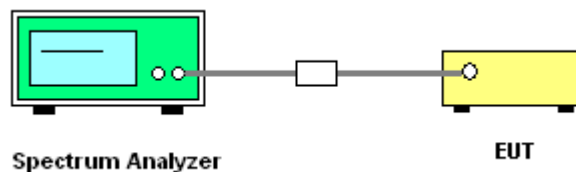

3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.8 Antenna Requirements

3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.8.3 Antenna Gain

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101400	9kHz~30GHz	Jan. 28, 2015	Apr. 09, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	10Hz~40GHz	Jan. 28, 2015	Apr. 09, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA2411B	1207253	0.3GHz~40GHz	Jan. 28, 2015	Apr. 09, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
Thermal Chamber	Hongzhangroup	LP-150U	HD20120425	-40℃~150℃	Jan. 28, 2015	Apr. 09, 2015	Jan. 27, 2016	Conducted (TH01-SZ)
DC Power Supply	GWINSTEK	GPS-3030D	EM882636	DC 10~30V	May 08, 2014	Apr. 09, 2015	May 07, 2015	Conducted (TH01-SZ)
ESCIO TEST Receiver	R&S	ESCI7	100768	9kHz~3GHz	May 04, 2014	Apr. 16, 2015	May 03, 2015	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	May 08, 2014	Apr. 16, 2015	May 07, 2015	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 09, 2014	Apr. 16, 2015	May 08, 2015	Radiation (03CH01-SZ)
Bilog Antenna	TESEQ	CBL 6112D	37877	30MHz~2GHz	Oct. 15, 2014	Apr. 16, 2015	Oct. 14, 2015	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 15, 2014	Apr. 16, 2015	Oct. 14, 2015	Radiation (03CH01-SZ)
Double Ridged Horn Antenna	COM-POWER	AH-840	101073	18GHz~40GHz	Jun. 09, 2014	Apr. 16, 2015	Jun. 08, 2015	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz~3000MHz GAIN 30db	Jan. 28, 2015	Apr. 16, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
Amplifier	Chengyi	AMF-7D-001 01800-30-10 P-R	1707137	1GHz~18GHz	May 08, 2014	Apr. 16, 2015	May 07, 2015	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	May 08, 2014	Apr. 16, 2015	May 07, 2015	Radiation (03CH01-SZ)
Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz	Jul. 08, 2014	Apr. 16, 2015	Jul. 07, 2015	Radiation (03CH01-SZ)
AC Source	Chroma	61601ACSO URCE	6160100024 70	100Vac~240Vac	NCR	Apr. 16, 2015	NCR	Radiation (03CH01-SZ)
Turn Table	EM Electronics	EM 1000	N/A	0~360 degree	NCR	Apr. 16, 2015	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM Electronics	EM 1000	N/A	1 m~4 m	NCR	Apr. 16, 2015	NCR	Radiation (03CH01-SZ)
EMI TEST Receiver	R&S	ESCI7	100768	9kHz~3GHz	May 04, 2014	Apr. 16, 2015	May 03, 2015	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Feb. 02, 2015	Apr. 16, 2015	Feb. 01, 2016	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Feb. 02, 2015	Apr. 16, 2015	Feb. 01, 2016	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	6160200008 91	100Vac~250Vac	Sep. 29, 2014	Apr. 16, 2015	Sep. 28, 2015	Conduction (CO01-SZ)
System Simulator	R&S	CMU 200	116456	Full-Band	Aug. 11, 2014	Apr. 16, 2015	Aug. 10, 2015	Conduction (CO01-SZ)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.9 dB
---	--------

Test Engineer:	Mygai Mo	Temperature:	21~25	°C
Test Date:	2015/4/9	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% OBW

Band IV							
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	6 dB Bandwidth (MHz)	FCC 6dB Bandwidth Limit (MHz)	Pass/Fail
11a	6Mbps	1	149	5745	16.36	0.5	Pass
11a	6Mbps	1	157	5785	16.32	0.5	Pass
11a	6Mbps	1	161	5805	16.32	0.5	Pass
HT20	MCS0	1	149	5745	17.56	0.5	Pass
HT20	MCS0	1	157	5785	17.62	0.5	Pass
HT20	MCS0	1	161	5805	17.56	0.5	Pass
HT40	MCS0	1	151	5755	35.36	0.5	Pass
HT40	MCS0	1	159	5795	35.84	0.5	Pass

TEST RESULTS DATA
Average Power Table

FCC Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	149	5745	0.30	7.17	30.00	-2.02		Pass
11a	6Mbps	1	157	5785	0.30	7.12	30.00	-2.02		Pass
11a	6Mbps	1	161	5805	0.30	7.27	30.00	-2.02		Pass
HT20	MCS0	1	149	5745	0.32	7.26	30.00	-2.02		Pass
HT20	MCS0	1	157	5785	0.32	7.23	30.00	-2.02		Pass
HT20	MCS0	1	161	5805	0.32	7.34	30.00	-2.02		Pass
HT40	MCS0	1	151	5755	0.61	8.00	30.00	-2.02		Pass
HT40	MCS0	1	159	5795	0.61	7.77	30.00	-2.02		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6Mbps	1	149	5745	0.30	2.22	-6.79	30.00	-2.02	Pass
11a	6Mbps	1	157	5785	0.30	2.22	-6.84	30.00	-2.02	Pass
11a	6Mbps	1	161	5805	0.30	2.22	-6.86	30.00	-2.02	Pass
HT20	MCS0	1	149	5745	0.32	2.22	-6.98	30.00	-2.02	Pass
HT20	MCS0	1	157	5785	0.32	2.22	-6.89	30.00	-2.02	Pass
HT20	MCS0	1	161	5805	0.32	2.22	-7.56	30.00	-2.02	Pass
HT40	MCS0	1	151	5755	0.61	2.22	-8.88	30.00	-2.02	Pass
HT40	MCS0	1	159	5795	0.61	2.22	-9.36	30.00	-2.02	Pass

TEST RESULTS DATA
Frequency Stability

Band IV										
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	149	5745	5745.050	0.050	8.70	20	3.6	
11a	6Mbps	1	149	5745	5745.050	0.050	8.70	20	4.2	
11a	6Mbps	1	149	5745	5745.050	0.050	8.70	20	3.8	
11a	6Mbps	1	149	5745	5745.100	0.100	17.41	-30	3.8	
11a	6Mbps	1	149	5745	5745.050	0.050	8.70	50	3.8	



Appendix B. Radiated Spurious Emission

15E Band 4 - 5725~5825MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		5699.72	58.25	-10.05	68.3	37.37	35.37	13.8	28.29	184	238	P	H
		5725	63.83	-14.47	78.3	42.89	35.41	13.8	28.27	184	238	P	H
	*	5745	100.85	-	-	79.8	35.44	13.87	28.26	184	238	P	H
	*	5745	91.75	-	-	70.7	35.44	13.87	28.26	184	238	A	H
		5698.36	57.86	-10.44	68.3	37.04	35.37	13.74	28.29	200	10	P	V
		5724.52	59.46	-18.84	78.3	38.52	35.41	13.8	28.27	200	10	P	V
	*	5745	95.16	-	-	74.11	35.44	13.87	28.26	200	10	P	V
	*	5745	86.51	-	-	65.46	35.44	13.87	28.26	200	10	A	V
802.11a CH 157 5785MHz		5713.64	57.5	-10.8	68.3	36.59	35.39	13.8	28.28	185	274	P	H
		5720.28	57.65	-20.65	78.3	36.71	35.41	13.8	28.27	185	274	P	H
	*	5785	100.3	-	-	79.2	35.49	13.85	28.24	185	274	P	H
	*	5785	91.3	-	-	70.2	35.49	13.85	28.24	185	274	A	H
		5858.24	56.85	-21.45	78.3	35.58	35.61	13.81	28.15	185	274	P	H
		5885.2	58.28	-10.02	68.3	36.97	35.63	13.81	28.13	185	274	P	H
		5689.88	58.36	-9.94	68.3	37.54	35.37	13.74	28.29	200	10	P	V
		5722.76	57.26	-21.04	78.3	36.32	35.41	13.8	28.27	200	10	P	V
	*	5785	92.33	-	-	71.23	35.49	13.85	28.24	200	10	P	V
	*	5785	83.55	-	-	62.45	35.49	13.85	28.24	200	10	A	V
		5853.76	57.41	-20.89	78.3	36.12	35.61	13.83	28.15	200	10	P	V
		5886.24	56.97	-11.33	68.3	35.66	35.63	13.81	28.13	200	10	P	V



WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 161 5805MHz		5694.28	59.19	-9.11	68.3	38.37	35.37	13.74	28.29	200	235	P	H
		5722.76	58.03	-20.27	78.3	37.09	35.41	13.8	28.27	200	235	P	H
	*	5805	99.74	-	-	78.57	35.53	13.85	28.21	200	235	P	H
	*	5805	90.41	-	-	69.24	35.53	13.85	28.21	200	235	A	H
		5857.28	58.23	-20.07	78.3	36.96	35.61	13.81	28.15	200	235	P	H
		5875.2	57.8	-10.5	68.3	36.49	35.63	13.81	28.13	200	235	P	H
		5689.48	58.5	-9.8	68.3	37.68	35.37	13.74	28.29	200	94	P	V
		5716.28	56.97	-21.33	78.3	36.06	35.39	13.8	28.28	200	94	P	V
	*	5805	91.69	-	-	70.52	35.53	13.85	28.21	200	94	P	V
	*	5805	82.83	-	-	61.66	35.53	13.85	28.21	200	94	A	V
		5852.48	57.94	-20.36	78.3	36.7	35.58	13.83	28.17	200	94	P	V
		5864.88	59.46	-8.84	68.3	38.19	35.61	13.81	28.15	200	94	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E Band 4 5725~5825MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	48.82	-25.18	74	16.12	39.19	17.68	24.17	145	265	P	H
		17235	47.56	-20.74	68.3	7.88	41.67	21.11	23.1	174	321	P	H
		11490	48.57	-25.43	74	15.87	39.19	17.68	24.17	145	265	P	V
		17235	47.51	-20.79	68.3	7.83	41.67	21.11	23.1	174	321	P	V
802.11a CH 157 5785MHz		11570	48.95	-25.05	74	15.81	39.24	18.01	24.11	105	198	P	H
		17355	46.61	-21.69	68.3	6.82	41.86	21.03	23.1	189	185	P	H
		11570	47.9	-26.1	74	14.76	39.24	18.01	24.11	105	198	P	V
		17355	46.9	-21.4	68.3	7.11	41.86	21.03	23.1	189	185	P	V
802.11a CH 161 5805MHz		11610	49.12	-24.88	74	15.77	39.26	18.18	24.09	146	347	P	H
		17415	46.83	-21.47	68.3	7.08	41.97	20.89	23.11	145	274	P	H
		11610	48.25	-25.75	74	14.9	39.26	18.18	24.09	146	347	P	V
		17415	46.86	-21.44	68.3	7.11	41.97	20.89	23.11	145	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15E Band 4 5725~5825MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5700.52	58.03	-10.27	68.3	37.12	35.39	13.8	28.28	185	238	P	H
		5724.04	66.47	-11.83	78.3	45.53	35.41	13.8	28.27	185	238	P	H
	*	5745	100.26	-	-	79.21	35.44	13.87	28.26	185	238	P	H
	*	5745	91.56	-	-	70.51	35.44	13.87	28.26	185	238	A	H
		5706.76	57.86	-10.44	68.3	36.95	35.39	13.8	28.28	199	10	P	V
		5724.52	61.06	-17.24	78.3	40.12	35.41	13.8	28.27	199	10	P	V
	*	5745	95.78	-	-	74.73	35.44	13.87	28.26	199	10	P	V
	*	5745	86.41	-	-	65.36	35.44	13.87	28.26	199	10	A	V
802.11n HT20 CH 157 5785MHz		5689.56	57.83	-10.47	68.3	37.01	35.37	13.74	28.29	184	275	P	H
		5718.52	56.95	-21.35	78.3	36.01	35.41	13.8	28.27	184	275	P	H
	*	5785	100.45	-	-	79.35	35.49	13.85	28.24	184	275	P	H
	*	5785	91.52	-	-	70.42	35.49	13.85	28.24	184	275	A	H
		5851.2	57.8	-20.5	78.3	36.56	35.58	13.83	28.17	184	275	P	H
		5867.6	58.09	-10.21	68.3	36.82	35.61	13.81	28.15	184	275	P	H
		5687.96	58.87	-9.43	68.3	38.05	35.37	13.74	28.29	199	10	P	V
		5716.76	57.73	-20.57	78.3	36.82	35.39	13.8	28.28	199	10	P	V
	*	5785	92.95	-	-	71.85	35.49	13.85	28.24	199	10	P	V
	*	5785	83.64	-	-	62.54	35.49	13.85	28.24	199	10	A	V
		5857.52	57.99	-20.31	78.3	36.72	35.61	13.81	28.15	199	10	P	V
		5886.16	57.98	-10.32	68.3	36.67	35.63	13.81	28.13	199	10	P	V



WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)

802.11n

HT20

CH 161

5805MHz



**15E Band 4 5725~5825MHz
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		11490	48.24	-25.76	74	15.54	39.19	17.68	24.17	145	265	P	H
		17235	47.73	-20.57	68.3	8.05	41.67	21.11	23.1	174	321	P	H
		11490	47.5	-26.5	74	14.8	39.19	17.68	24.17	145	265	P	V
		17235	48.56	-19.74	68.3	8.88	41.67	21.11	23.1	174	321	P	V
802.11n HT20 CH 157 5785MHz		11570	47.93	-26.07	74	14.79	39.24	18.01	24.11	105	198	P	H
		17355	46.06	-22.24	68.3	6.27	41.86	21.03	23.1	189	185	P	H
		11570	48.6	-25.4	74	15.46	39.24	18.01	24.11	105	198	P	V
		17355	47.24	-21.06	68.3	7.45	41.86	21.03	23.1	189	185	P	V
802.11n HT20 CH 161 5805MHz		11610	48.11	-25.89	74	14.76	39.26	18.18	24.09	146	347	P	H
		17415	47.13	-21.17	68.3	7.38	41.97	20.89	23.11	145	274	P	H
		11610	47.6	-26.4	74	14.25	39.26	18.18	24.09	146	347	P	V
		17415	46.94	-21.36	68.3	7.19	41.97	20.89	23.11	145	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E Band 4 5725~5825MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 151 5755MHz		5713.96	66.25	-2.05	68.3	45.34	35.39	13.8	28.28	186	235	P	H
		5724.12	69.18	-9.12	78.3	48.24	35.41	13.8	28.27	186	235	P	H
	*	5755	100.86	-	-	79.78	35.46	13.87	28.25	186	235	P	H
	*	5755	91.86	-	-	70.78	35.46	13.87	28.25	186	235	A	H
		5852.88	57.5	-20.8	78.3	36.26	35.58	13.83	28.17	186	235	P	H
		5888.64	56.98	-11.32	68.3	35.62	35.66	13.81	28.11	186	235	P	H
		5712.04	59.87	-8.43	68.3	38.96	35.39	13.8	28.28	193	95	P	V
		5724.12	64.84	-13.46	78.3	43.9	35.41	13.8	28.27	193	95	P	V
	*	5755	93.31	-	-	72.23	35.46	13.87	28.25	193	95	P	V
	*	5755	85.64	-	-	64.56	35.46	13.87	28.25	193	95	A	V
		5859.6	56.62	-21.68	78.3	35.35	35.61	13.81	28.15	193	95	P	V
		5888.4	57.43	-10.87	68.3	36.07	35.66	13.81	28.11	193	95	P	V
802.11n HT40 CH 159 5795MHz		5706.6	59.52	-8.78	68.3	38.61	35.39	13.8	28.28	186	235	P	H
		5722.44	57.39	-20.91	78.3	36.45	35.41	13.8	28.27	186	235	P	H
	*	5795	100.76	-	-	79.63	35.51	13.85	28.23	186	235	P	H
	*	5795	91.98	-	-	70.85	35.51	13.85	28.23	186	235	A	H
		5855.44	58.77	-19.53	78.3	37.48	35.61	13.83	28.15	186	235	P	H
		5860	58.83	-9.47	68.3	37.56	35.61	13.81	28.15	186	235	P	H
		5691.32	57.36	-10.94	68.3	36.54	35.37	13.74	28.29	193	95	P	V
		5721.08	57.48	-20.82	78.3	36.54	35.41	13.8	28.27	193	95	P	V
	*	5795	90.36	-	-	69.23	35.51	13.85	28.23	193	95	P	V
	*	5795	82.61	-	-	61.48	35.51	13.85	28.23	193	95	A	V
		5855.12	57.21	-21.09	78.3	35.92	35.61	13.83	28.15	193	95	P	V
		5869.04	57.8	-10.5	68.3	36.53	35.61	13.81	28.15	193	95	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E Band 4 5725~5825MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)

802.11n

HT40

CH 151

5755MHz



15E Emission below 1GHz

5GHz WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)

5GHz

802.11n

HT40

LF



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.