



**FCC CFR47 PART 15 SUBPART C**

**CERTIFICATION TEST REPORT**

**FOR**

**GSM/WCDMA Tablet + Bluetooth, DTS b/g/n**

**MODEL NUMBER : SM-T561Y**

**FCC ID: A3LSMT561Y**

**REPORT NUMBER: 15K21694-E1**

**ISSUE DATE: SEP 09, 2015**

*Prepared for*

**SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 443-742, KOREA**

*Prepared by*

**UL Korea, Ltd. Suwon Laboratory  
218 Maeyeong-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 443-823, Korea  
TEL: (031) 337-9902  
FAX: (031) 213-5433**



**ACCREDITED**

**TL-637**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	08/31/15	Initial issue	SungGil Park
--	09/09/15	Revised Band Edge and CSE test plots of Ch. 12, 13	SungGil Park

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATION .....</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>7</i>
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>8</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>8</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>8</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>8</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>8</i>
5.5. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>9</i>
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>11</b>
<b>7. MEASUREMENT METHODS .....</b>	<b>11</b>
<b>8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS .....</b>	<b>12</b>
8.1. <i>ON TIME AND DUTY CYCLE RESULTS.....</i>	<i>12</i>
<b>9. SUMMARY TABLE .....</b>	<b>13</b>
<b>10. ANTENNA PORT TEST RESULTS .....</b>	<b>14</b>
10.1. <i>6 dB BANDWIDTH .....</i>	<i>144</i>
10.1.1. <i>802.11b MODE IN THE 2.4 GHz BAND .....</i>	<i>15</i>
10.1.2. <i>802.11g MODE IN THE 2.4 GHz BAND .....</i>	<i>15</i>
10.1.3. <i>802.11n HT20 MODE IN THE 2.4 GHz BAND.....</i>	<i>15</i>
10.1.4. <i>6 dB BANDWIDTH PLOTS.....</i>	<i>16</i>
10.2. <i>99% BANDWIDTH .....</i>	<i>19</i>
10.2.1. <i>802.11b MODE IN THE 2.4 GHz BAND .....</i>	<i>19</i>
10.2.2. <i>802.11g MODE IN THE 2.4 GHz BAND .....</i>	<i>19</i>
10.2.3. <i>802.11n HT20 MODE IN THE 2.4 GHz BAND.....</i>	<i>19</i>
10.2.4. <i>99% BANDWIDTH PLOTS.....</i>	<i>20</i>
10.3. <i>AVERAGE POWER .....</i>	<i>23</i>
10.3.1. <i>802.11b MODE IN THE 2.4 GHz BAND .....</i>	<i>23</i>
10.3.2. <i>802.11g MODE IN THE 2.4 GHz BAND .....</i>	<i>23</i>
10.3.3. <i>802.11n HT20 MODE IN THE 2.4 GHz BAND.....</i>	<i>24</i>
10.4. <i>OUTPUT POWER.....</i>	<i>25</i>

10.4.1.	802.11b MODE IN THE 2.4 GHz BAND .....	25
10.4.2.	802.11g MODE IN THE 2.4 GHz BAND .....	26
10.4.3.	802.11n HT20 MODE IN THE 2.4 GHz BAND.....	27
10.5.	<i>PSD</i> .....	28
10.5.1.	802.11b MODE IN THE 2.4 GHz BAND .....	28
10.5.2.	802.11g MODE IN THE 2.4 GHz BAND .....	28
10.5.3.	802.11n HT20 MODE IN THE 2.4 GHz BAND.....	29
10.5.4.	PSD PLOTS .....	30
10.6.	<i>OUT-OF-BAND EMISSIONS</i> .....	33
10.6.1.	802.11b MODE IN THE 2.4 GHz BAND .....	34
10.6.2.	802.11g MODE IN THE 2.4 GHz BAND .....	40
10.6.3.	802.11n HT20 MODE IN THE 2.4 GHz BAND.....	46
10.6.4.	Bandedge Emission at Channel 12 .....	52
10.6.5.	Bandedge Emission at Channel 13 .....	55
10.6.6.	Spurious Emission at Channel 12.....	58
10.6.7.	Spurious Emission at Channel 13.....	4661
<b>11.</b>	<b>RADIATED TEST RESULTS .....</b>	<b>64</b>
11.1.	<i>LIMITS AND PROCEDURE</i> .....	64
11.2.	<i>TRANSMITTER ABOVE 1 GHz</i> .....	65
11.2.1.	TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND.....	65
11.2.2.	TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND.....	83
11.2.3.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND .....	101
11.3.	<i>WORST-CASE BELOW 1 GHz</i> .....	119
<b>12.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>121</b>
<b>13.</b>	<b>SETUP PHOTOS .....</b>	<b>124</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.  
**EUT DESCRIPTION:** GSM/WCDMA Tablet + Bluetooth and DTS b/g/n  
**MODEL NUMBER:** SM-T561Y  
**SERIAL NUMBER:** R32G301WP2N (RADIATED); R32G301WPDV (CONDUCTED)  
**DATE TESTED:** MARCH 11 - SEPTEMBER 09, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:



CY Choi  
Suwon Lab Engineer  
UL Korea, Ltd.

Tested By:



SungGil Park  
Suwon Lab Engineer  
UL Korea, Ltd.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-823, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input type="checkbox"/>	Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA Tablet + Bluetooth and DTS b/g/n.  
This test report addresses the DTS (WLAN) operational mode.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2472	802.11b	15.60	36.31
2412 - 2472	802.11g	14.30	26.92
2412 - 2472	802.11n HT20	13.10	20.42

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antennas, with a maximum gain of -0.19 dBi.

### 5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps  
802.11g mode: 6 Mbps  
802.11n HT20mode: MCS0

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA12EWE	N/A	N/A
Data Cable	SAMSUNG	ECB-DU68WC	N/A	N/A
Earphone	SAMSUNG	GH59-11129H	N/A	N/A


### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A
2	Audio	1	Mini-Jack	Unshielded	1.0m	N/A

### TEST SETUP

The EUT is a stand-alone unit during the tests. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

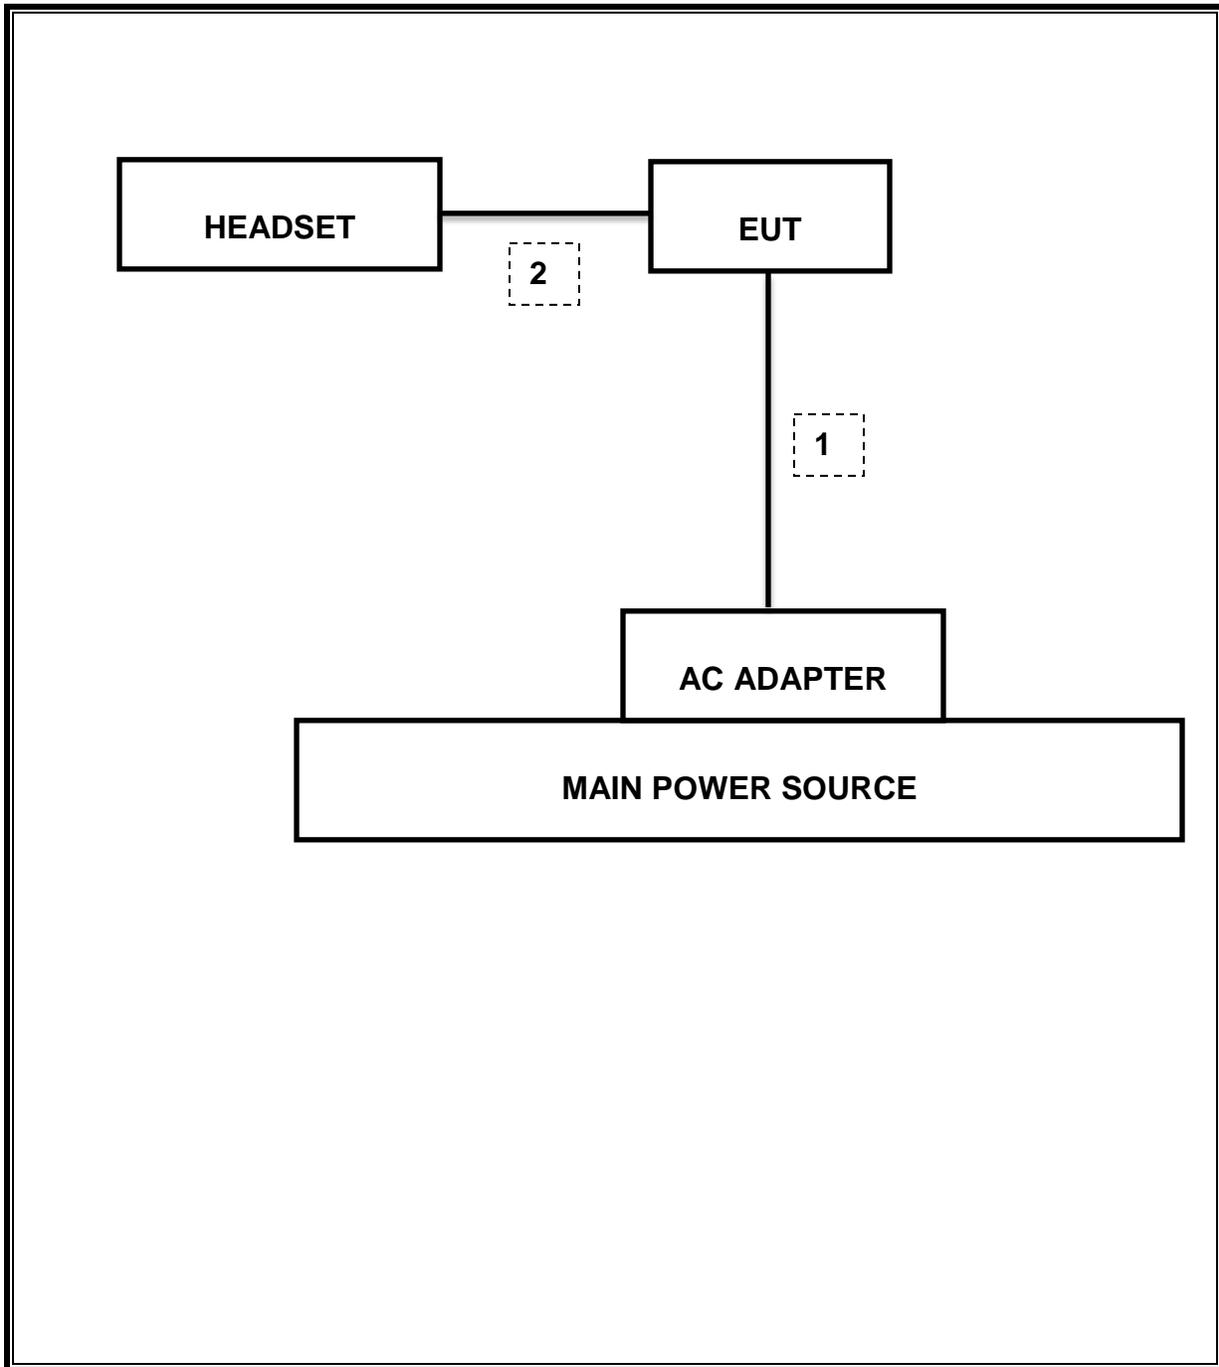

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	11-17-15
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-25-16
Antenna, Horn, 18 GHz	ETS	3115	00167211	09-20-15
Antenna, Horn, 18 GHz	ETS	3115	00161451	05-17-16
Antenna, Horn, 18 GHz	ETS	3117	00168724	06-17-16
Antenna, Horn, 18 GHz	ETS	3117	00168717	06-17-16
Antenna, Horn, 40 GHz	ETS	3116C	00166255	09-23-15
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	09-29-15
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-18-16
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-18-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-19-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-19-16
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	08-18-16
Average Power Sensor	R&S	NRZ-Z91	102681	08-18-16
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-18-16
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-19-16
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-19-16
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-19-16
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	009	08-18-16
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	015	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	009	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	010	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	016	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	015	08-18-16
LISN	R&S	ENV-216	101836	08-19-16
LISN	R&S	ENV-216	101837	08-19-16

## 7. MEASUREMENT METHODS

KDB 558074 D01 DTS Meas Guidance v03r03: Measurement Procedure §9.2.3.1 AVGPM is used for power and §10.2 AVGPS-1 is used for power spectral density.

Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

Band edge emissions within Restricted Bands are measured using RMS with duty cycle factor offset method.


## 8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

### LIMITS

None; for reporting purposes only.

### 8.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
<b>2400MHz Bands</b>						
802.11b	8.381	8.453	0.991	99.1%	0.00	0.010
802.11g	1.390	1.446	0.961	96.1%	0.17	0.719
802.11n HT20	1.169	1.247	0.937	93.7%	0.28	0.855

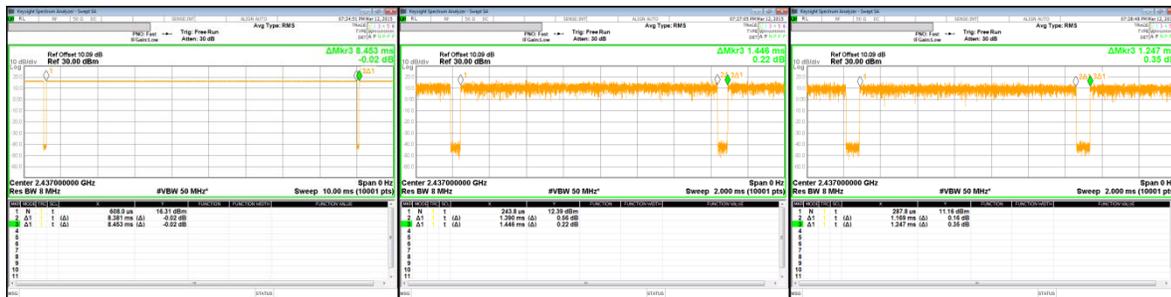

[802.11b Mode]

[802.11g Mode]

[802.11n Mode]

## 9. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	9.026 MHz
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-29.914 dBm
15.247	TX conducted output power	<30dBm		Pass	15.60 dBm
15.247	PSD	<8dBm		Pass	-15.43 dBm
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass	40.86 dBuV (AV)
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m	Radiated	Pass	42.4 dBuV/m (QP)

## 10. ANTENNA PORT TEST RESULTS

### 10.1. 6 dB BANDWIDTH

#### LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST PROCEDURE

Reference to KDB 558074 D01 DTS Meas Guidance v03r03: The transmitter output is connected to a spectrum analyzer with the RBW set to 100kHz, the VBW  $\geq 3 \times$  RBW, peak detector and max hold.

**RESULTS**

**10.1.1. 802.11b MODE IN THE 2.4 GHz BAND**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	9.994	0.5
Mid	2437	9.984	0.5
High	2462	10.011	0.5
12	2467	9.039	0.5
13	2472	9.026	0.5
Worst		9.026	


**10.1.2. 802.11g MODE IN THE 2.4 GHz BAND**


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	15.316	0.5
Mid	2437	15.753	0.5
High	2462	15.628	0.5
12	2467	15.119	0.5
13	2472	15.117	0.5
Worst		15.117	


**10.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	15.448	0.5
Mid	2437	15.120	0.5
High	2462	15.616	0.5
12	2467	15.691	0.5
13	2472	15.669	0.5
Worst		15.120	

### 10.1.4. 6 dB BANDWIDTH PLOTS

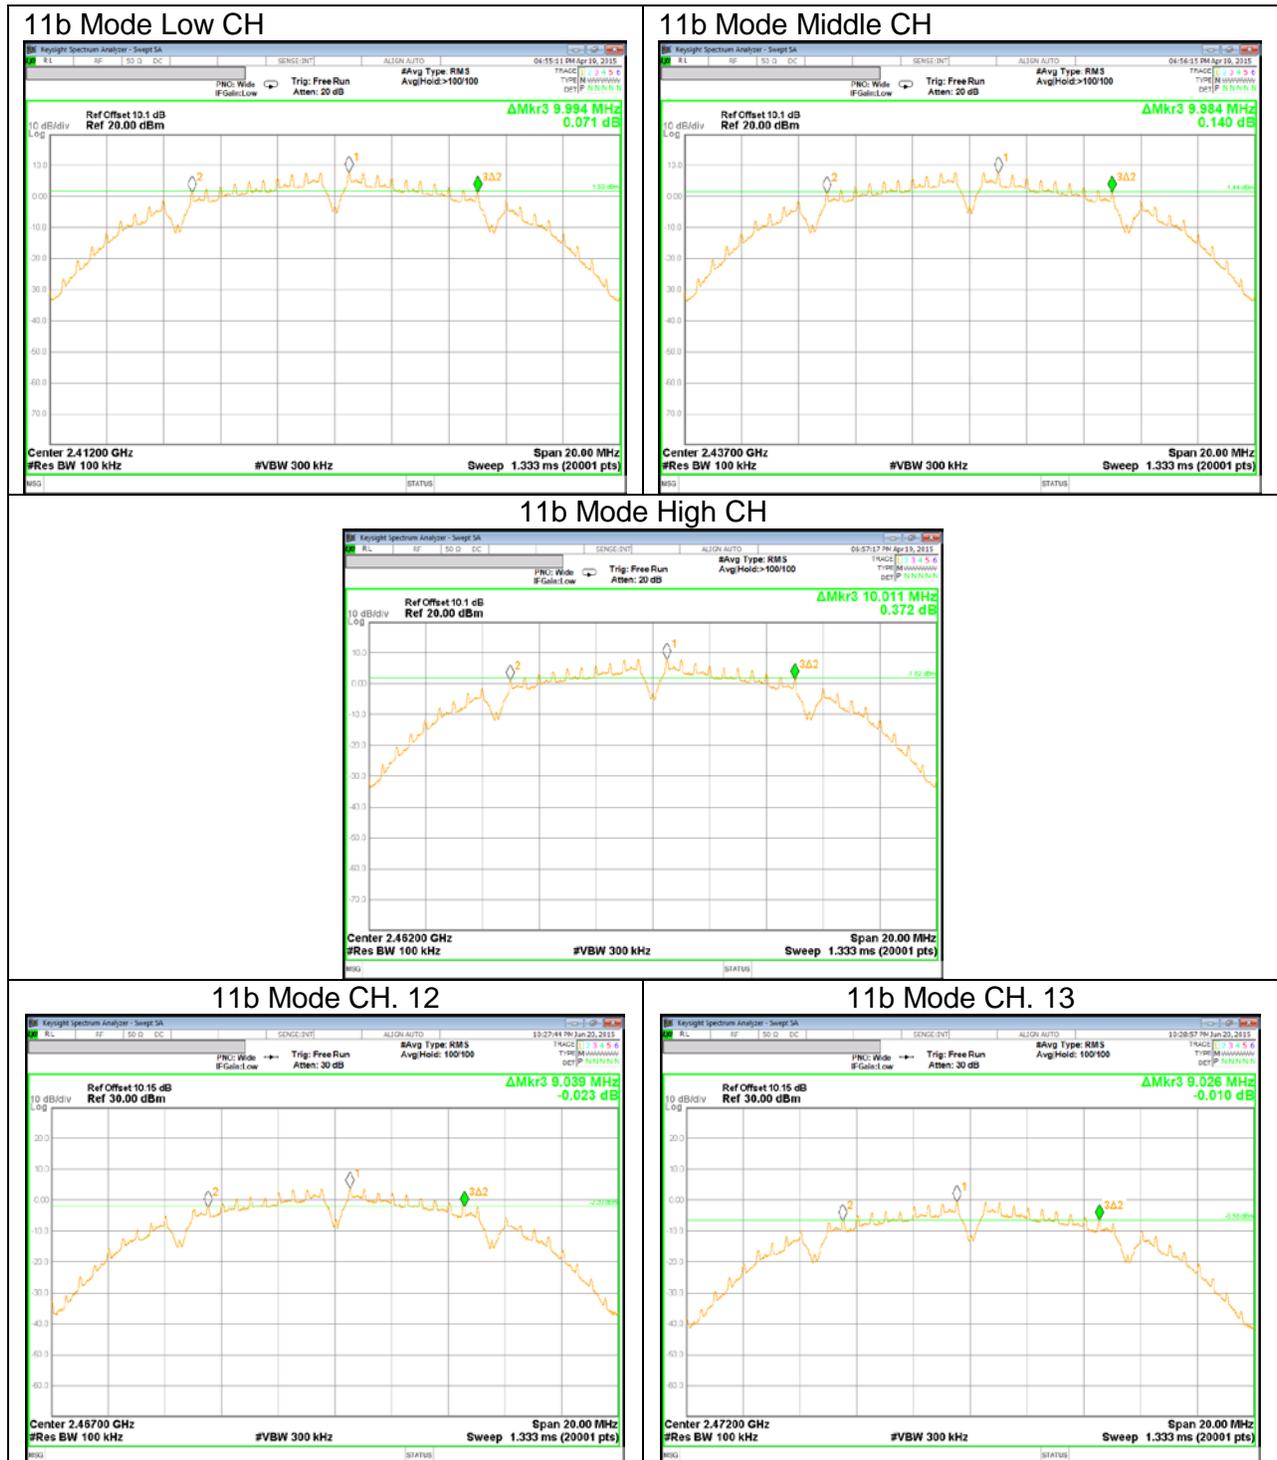

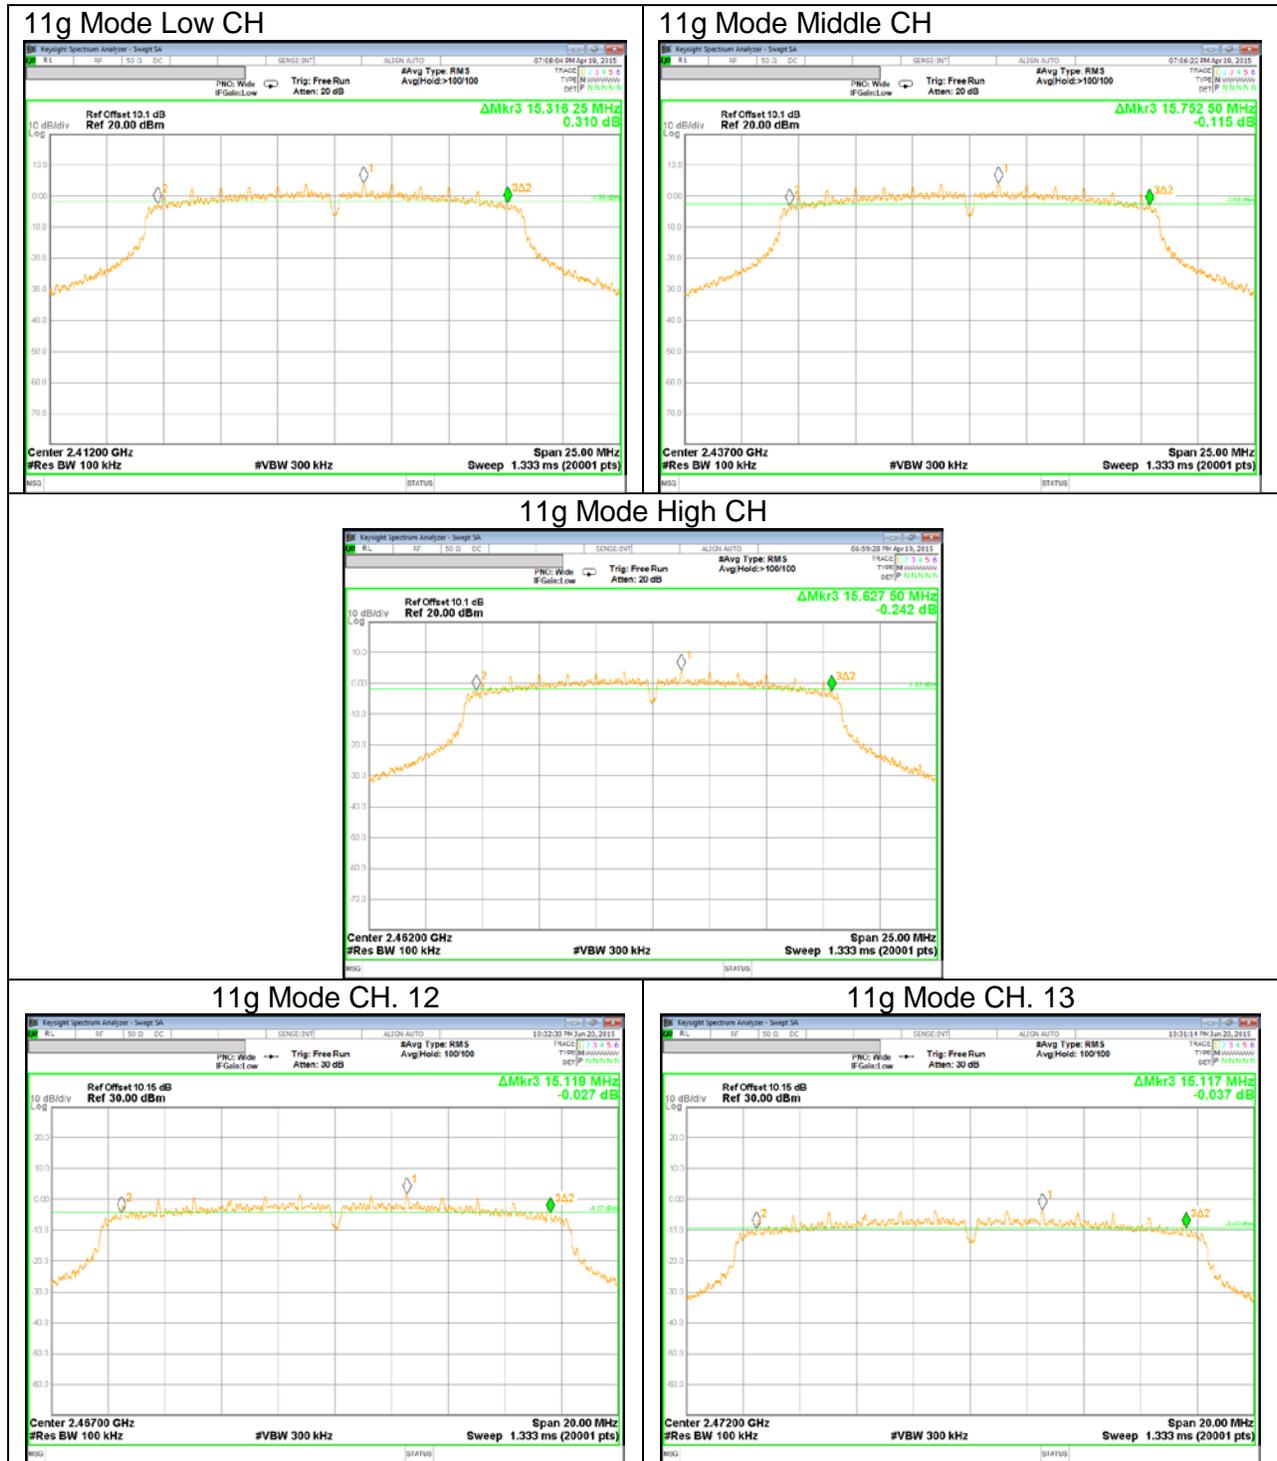

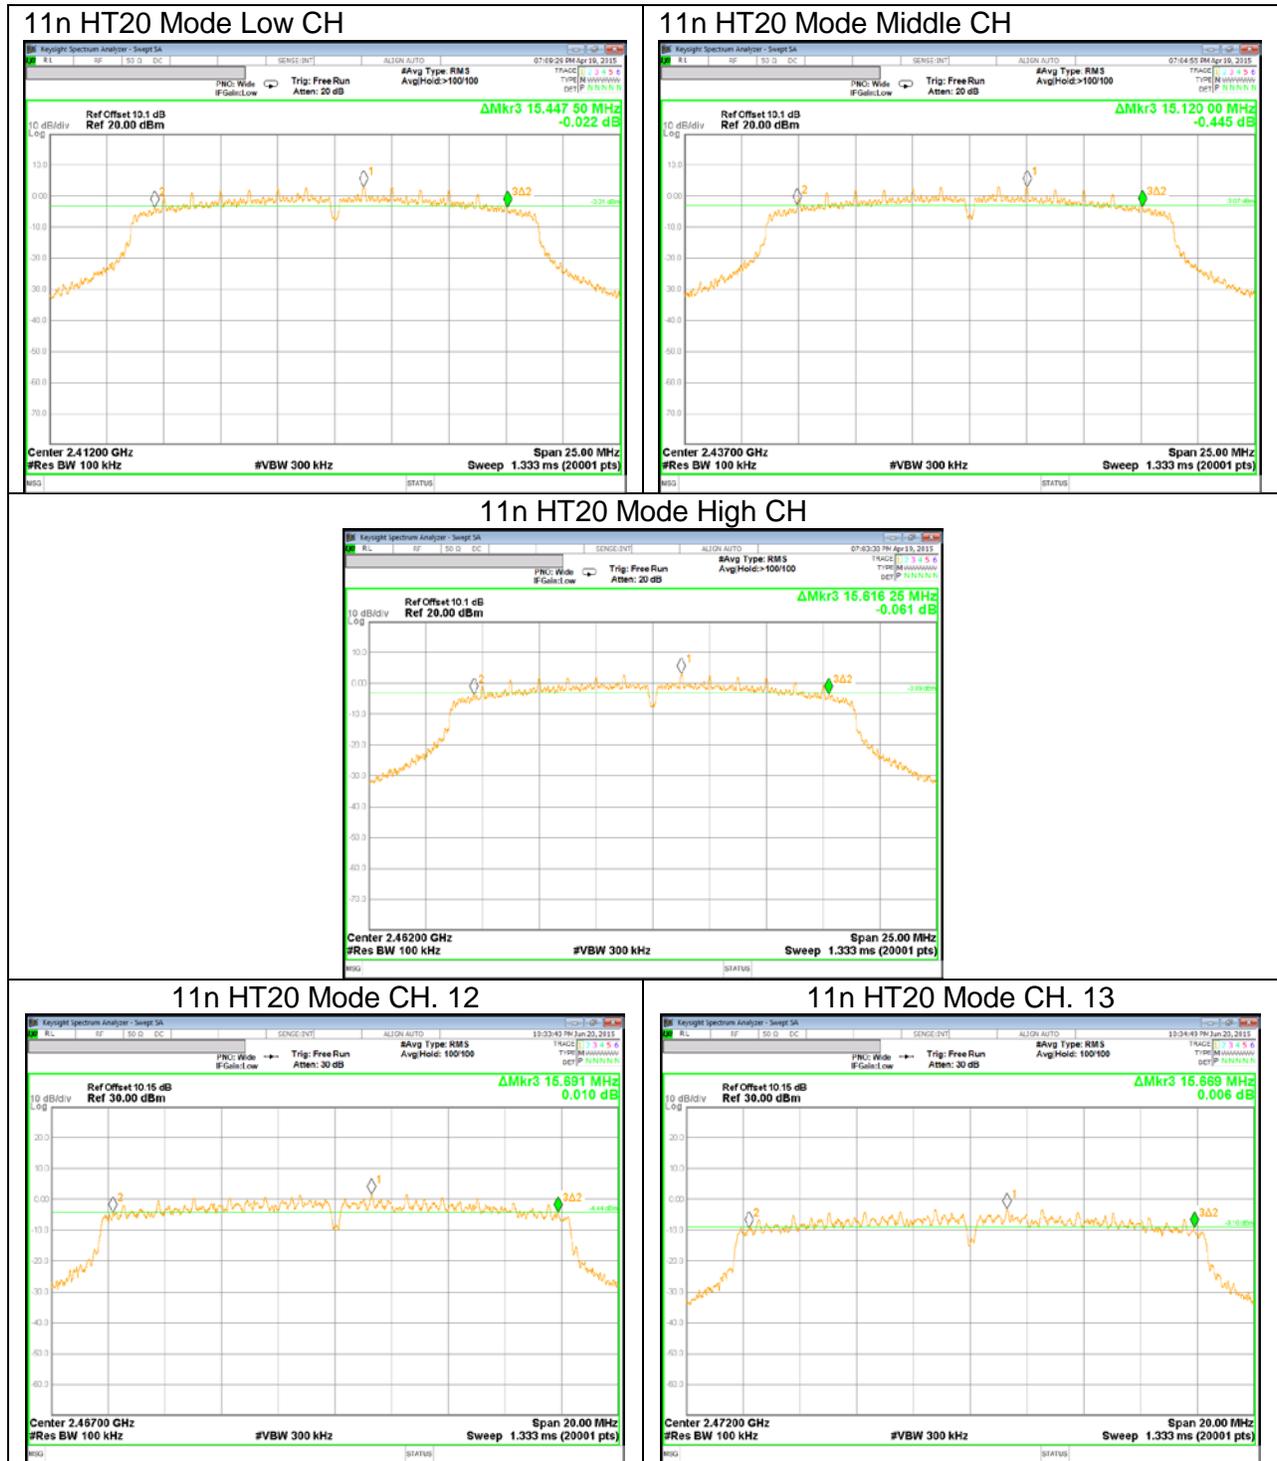

## 10.2. 99% BANDWIDTH

### LIMITS

None; for reporting purposes only.

### RESULTS

#### 10.2.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	14.073
Mid	2437	14.130
High	2462	14.231
12	2467	14.072
13	2472	14.069
Worst		14.231


#### 10.2.2. 802.11g MODE IN THE 2.4 GHz BAND


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.254
Mid	2437	16.301
High	2462	16.296
12	2467	16.287
13	2472	16.286
Worst		16.301

#### 10.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.494
Mid	2437	17.427
High	2462	17.486
12	2467	17.505
13	2472	17.441
Worst		17.505

### 10.2.4. 99% BANDWIDTH PLOTS

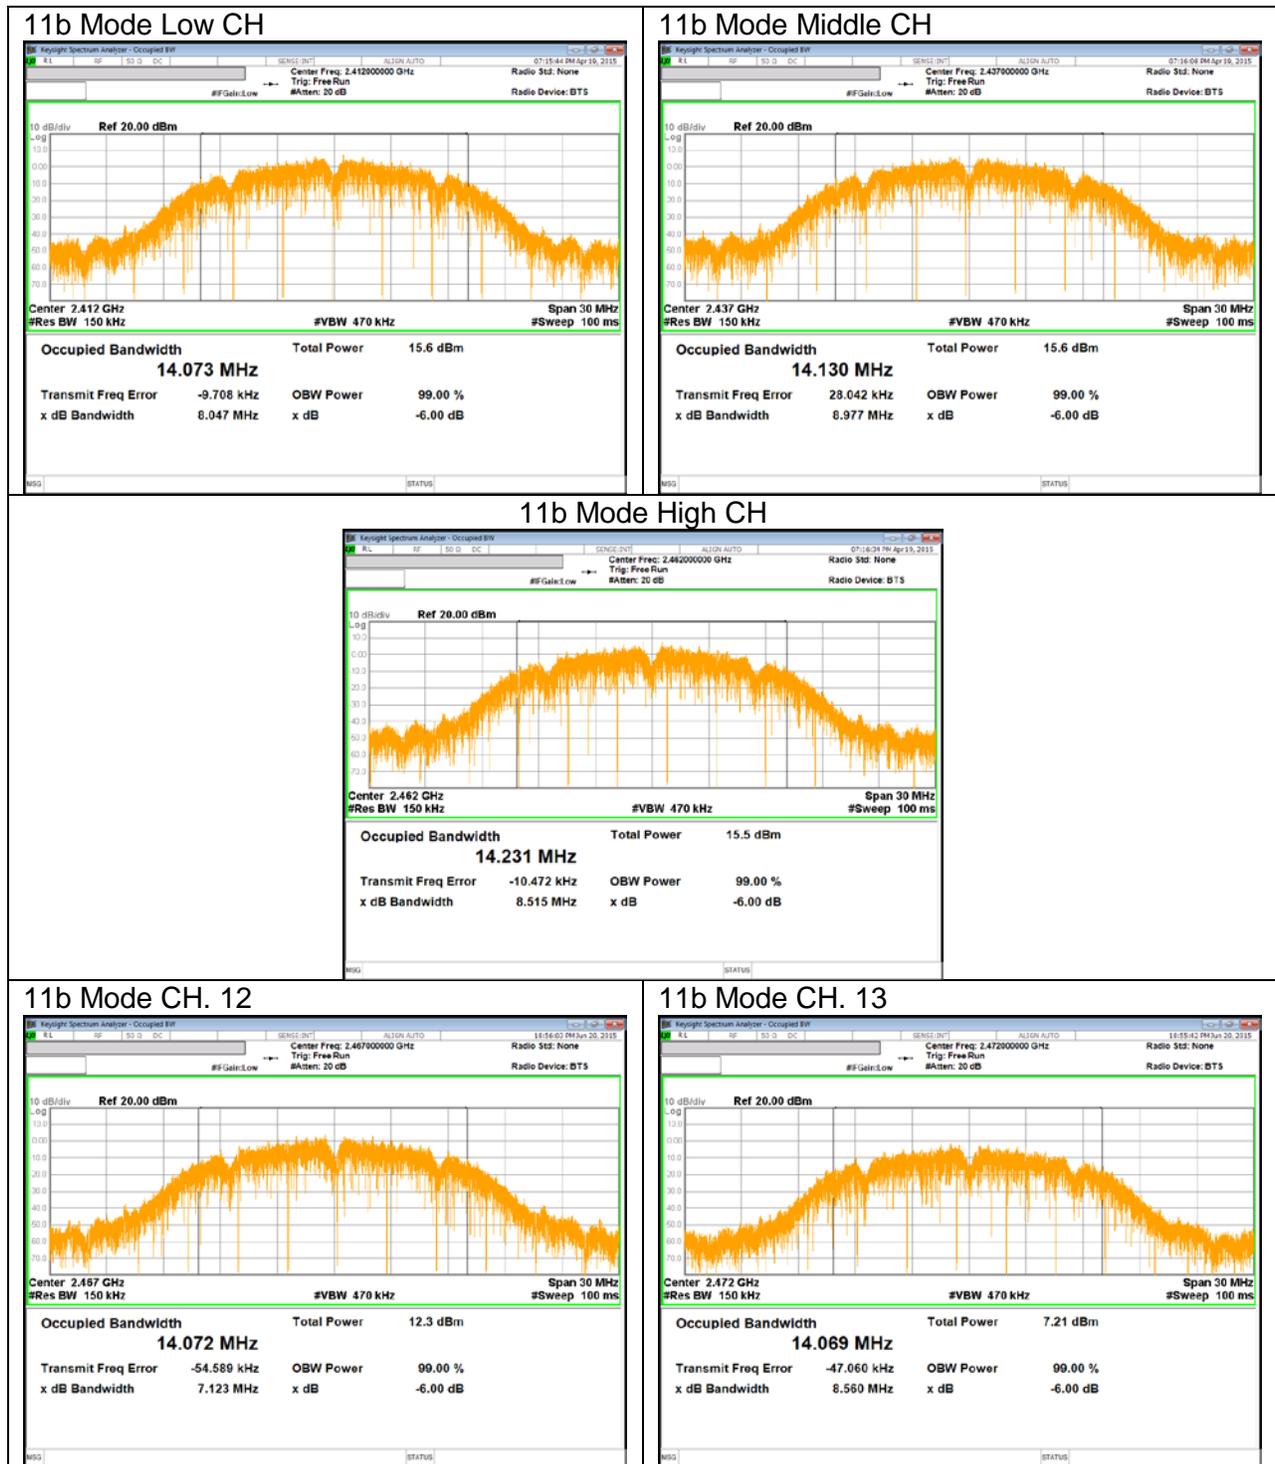


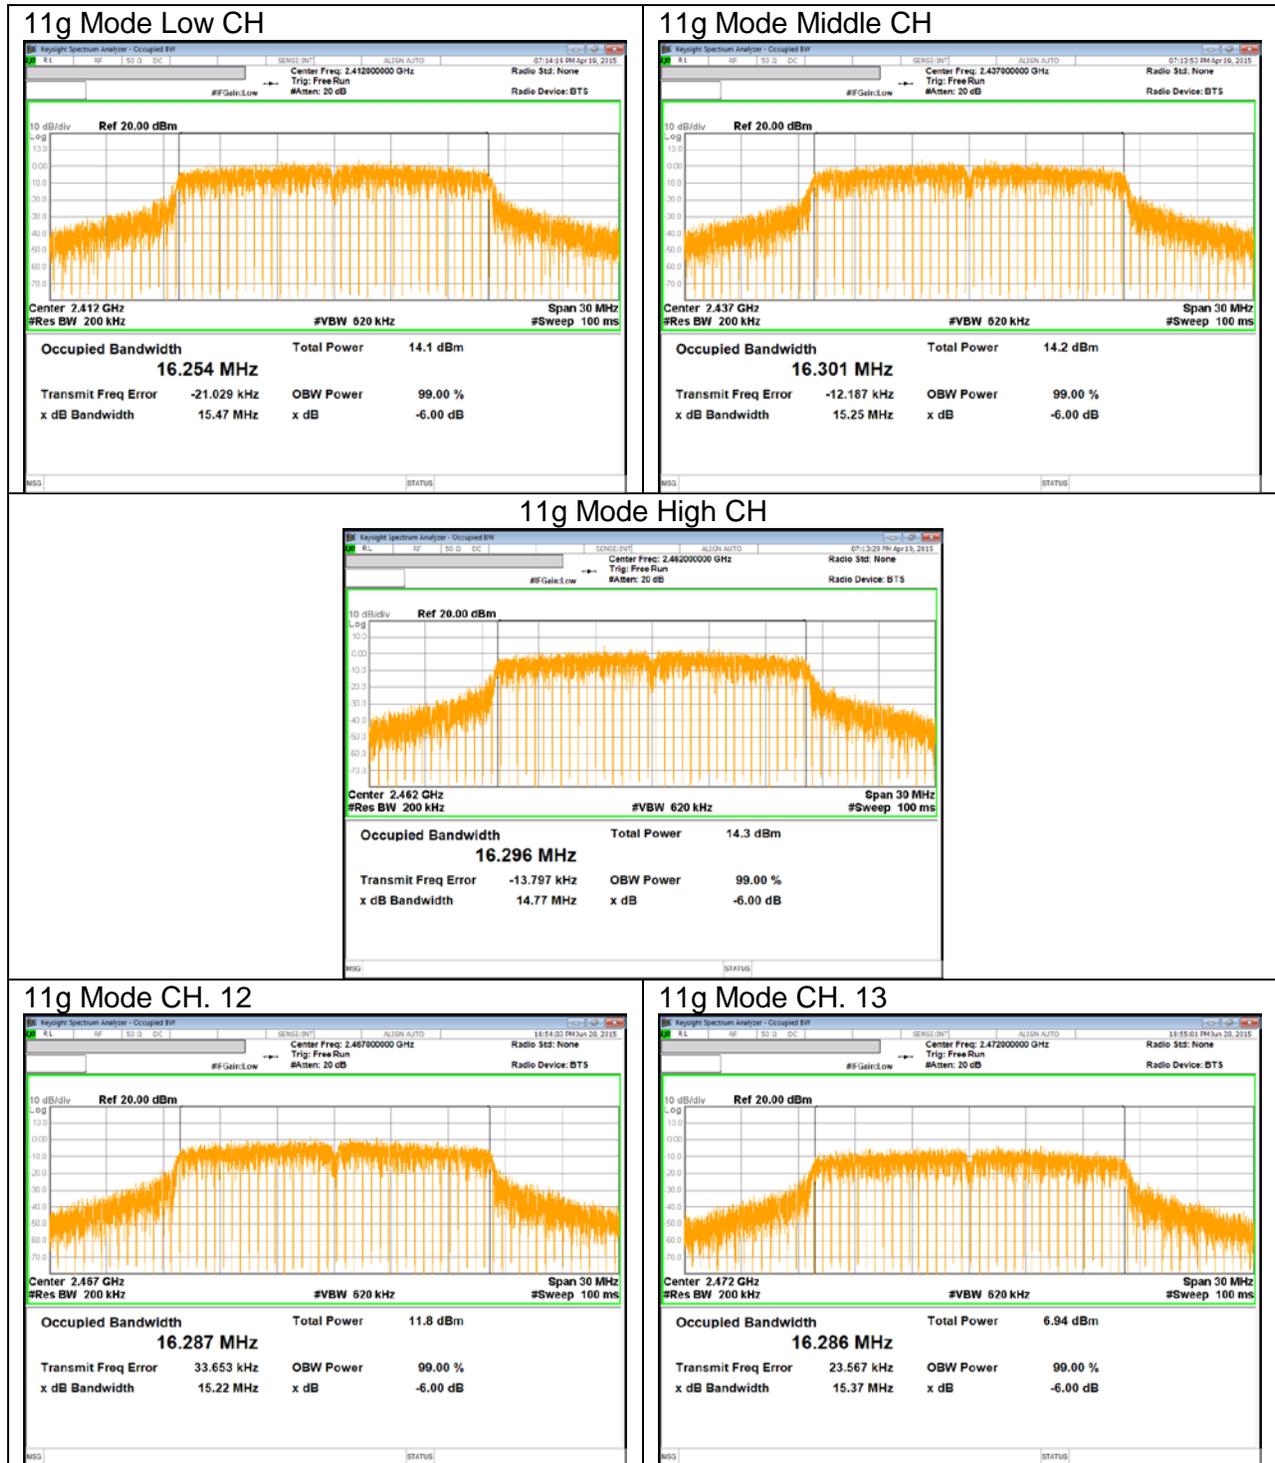


11n HT20 Mode Low CH

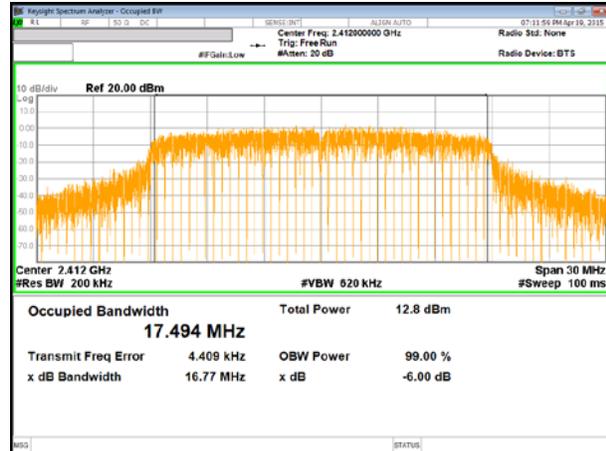


11n HT20 Mode Middle CH

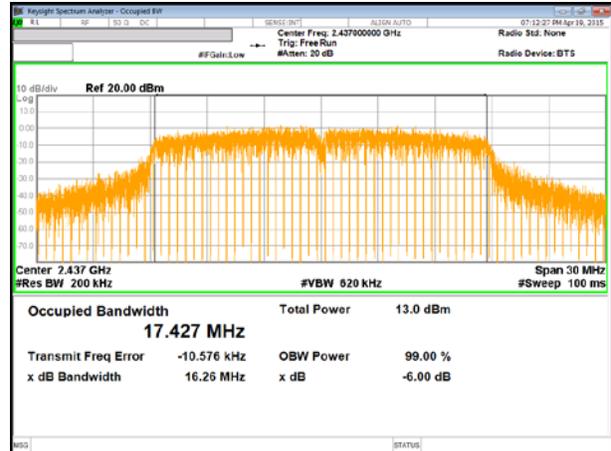


11n HT20 Mode High CH

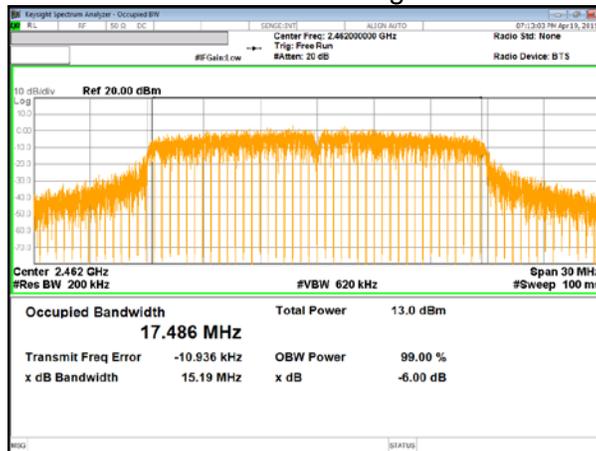

11n Mode CH. 12

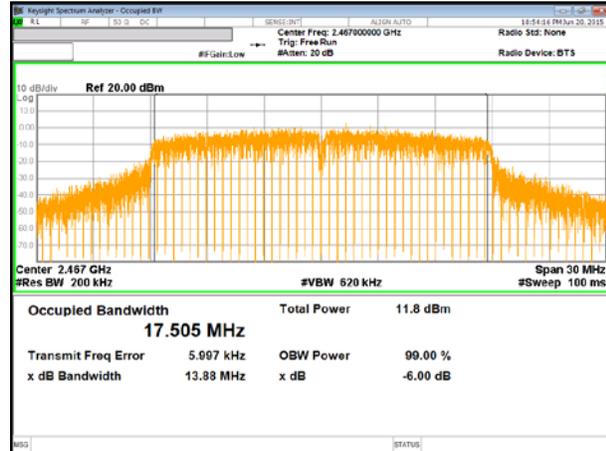

11n Mode CH. 13

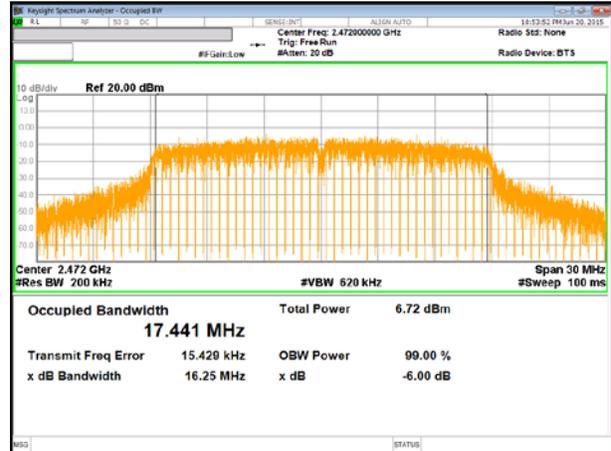

### 10.3. AVERAGE POWER

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.1 dB (including 10 dB pad and 0.1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### RESULTS

##### 10.3.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	2412	15.50
Mid	2437	15.50
High	2462	15.60
12	2467	11.94
13	2472	7.21
Worst		15.60

##### 10.3.2. 802.11g MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	2412	14.20
Mid	2437	14.20
High	2462	14.30
12	2467	11.86
13	2472	7.00
Worst		14.30

**10.3.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND**

Channel	Frequency (MHz)	Avg Power (dBm)
Low	2412	12.90
Mid	2437	13.10
High	2462	13.10
12	2467	11.40
13	2472	6.63
Worst		13.10

## 10.4. OUTPUT POWER

### LIMITS

FCC §15.247

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

### RESULTS

#### 10.4.1. 802.11b MODE IN THE 2.4 GHZ BAND

##### Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	-2.35	30.00	30.00	36.00	30.00
Mid	2437	-0.27	30.00	30.00	36.00	30.00
High	2462	-0.19	30.00	30.00	36.00	30.00
12	2467	-0.19	30.00	30.00	36.00	30.00
13	2472	-0.61	30.00	30.00	36.00	30.00

##### Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	15.50	15.50	30.00	-14.50
Mid	2437	15.50	15.50	30.00	-14.50
High	2462	15.60	15.60	30.00	-14.40
12	2467	11.94	11.94	30.00	-18.06
13	2472	7.21	7.21	30.00	-22.79
Worst			15.60		

**10.4.2. 802.11g MODE IN THE 2.4 GHz BAND**

**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	-2.35	30.00	30.00	36.00	30.00
Mid	2437	-0.27	30.00	30.00	36.00	30.00
High	2462	-0.19	30.00	30.00	36.00	30.00
12	2467	-0.19	30.00	30.00	36.00	30.00
13	2472	-0.61	30.00	30.00	36.00	30.00

**Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	14.20	14.20	30.00	-15.80
Mid	2437	14.20	14.20	30.00	-15.80
High	2462	14.30	14.30	30.00	-15.70
12	2467	11.86	11.86	30.00	-18.14
13	2472	7.00	7.00	30.00	-23.00
Worst			14.30		

**10.4.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND**

**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	-2.35	30.00	30.00	36.00	30.00
Mid	2437	-0.27	30.00	30.00	36.00	30.00
High	2462	-0.19	30.00	30.00	36.00	30.00
12	2467	-0.19	30.00	30.00	36.00	30.00
13	2472	-0.61	30.00	30.00	36.00	30.00

**Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	12.90	12.90	30.00	-17.10
Mid	2437	13.10	13.10	30.00	-16.90
High	2462	13.10	13.10	30.00	-16.90
12	2467	11.40	11.40	30.00	-18.60
13	2472	6.63	6.63	30.00	-23.37
Worst			13.10		

## 10.5. PSD

### LIMITS

FCC §15.247

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### RESULTS

#### 10.5.1. 802.11b MODE IN THE 2.4 GHZ BAND

##### PSD Results

Channel	Frequency [MHz]	PSD Meas [dBm]	Duty Factor [dB]	Final PSD [dBm]	Limit [dBm]	Margin [dB]
Low	2412	-16.08	0.00	-16.08	8.00	-24.08
Mid	2437	-15.66	0.00	-15.66	8.00	-23.66
High	2462	-15.43	0.00	-15.43	8.00	-23.43
12	2467	-18.79	0.00	-18.79	8.00	-26.79
13	2472	-23.83	0.00	-23.83	8.00	-31.83

#### 10.5.2. 802.11g MODE IN THE 2.4 GHZ BAND

##### PSD Results


Channel	Frequency [MHz]	PSD Meas [dBm]	Duty Factor [dB]	Final PSD [dBm]	Limit [dBm]	Margin [dB]
Low	2412	-19.35	0.17	-19.18	8.00	-27.35
Mid	2437	-19.04	0.17	-18.87	8.00	-27.04
High	2462	-19.58	0.17	-19.41	8.00	-27.58
12	2467	-21.23	0.17	-21.06	8.00	-29.23
13	2472	-23.83	0.17	-23.66	8.00	-31.83


**10.5.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND**


**PSD Results**

<b>Channel</b>	<b>Frequency [MHz]</b>	<b>PSD Meas [dBm]</b>	<b>Duty Factor [dB]</b>	<b>Final PSD [dBm]</b>	<b>Limit [dBm]</b>	<b>Margin [dB]</b>
Low	2412	-20.45	0.28	-20.17	8.00	-28.45
Mid	2437	-20.32	0.28	-20.04	8.00	-28.32
High	2462	-20.33	0.28	-20.05	8.00	-28.33
12	2467	-21.41	0.28	-21.13	8.00	-29.41
13	2472	-23.83	0.28	-23.55	8.00	-31.83

### 10.5.4. PSD PLOTS

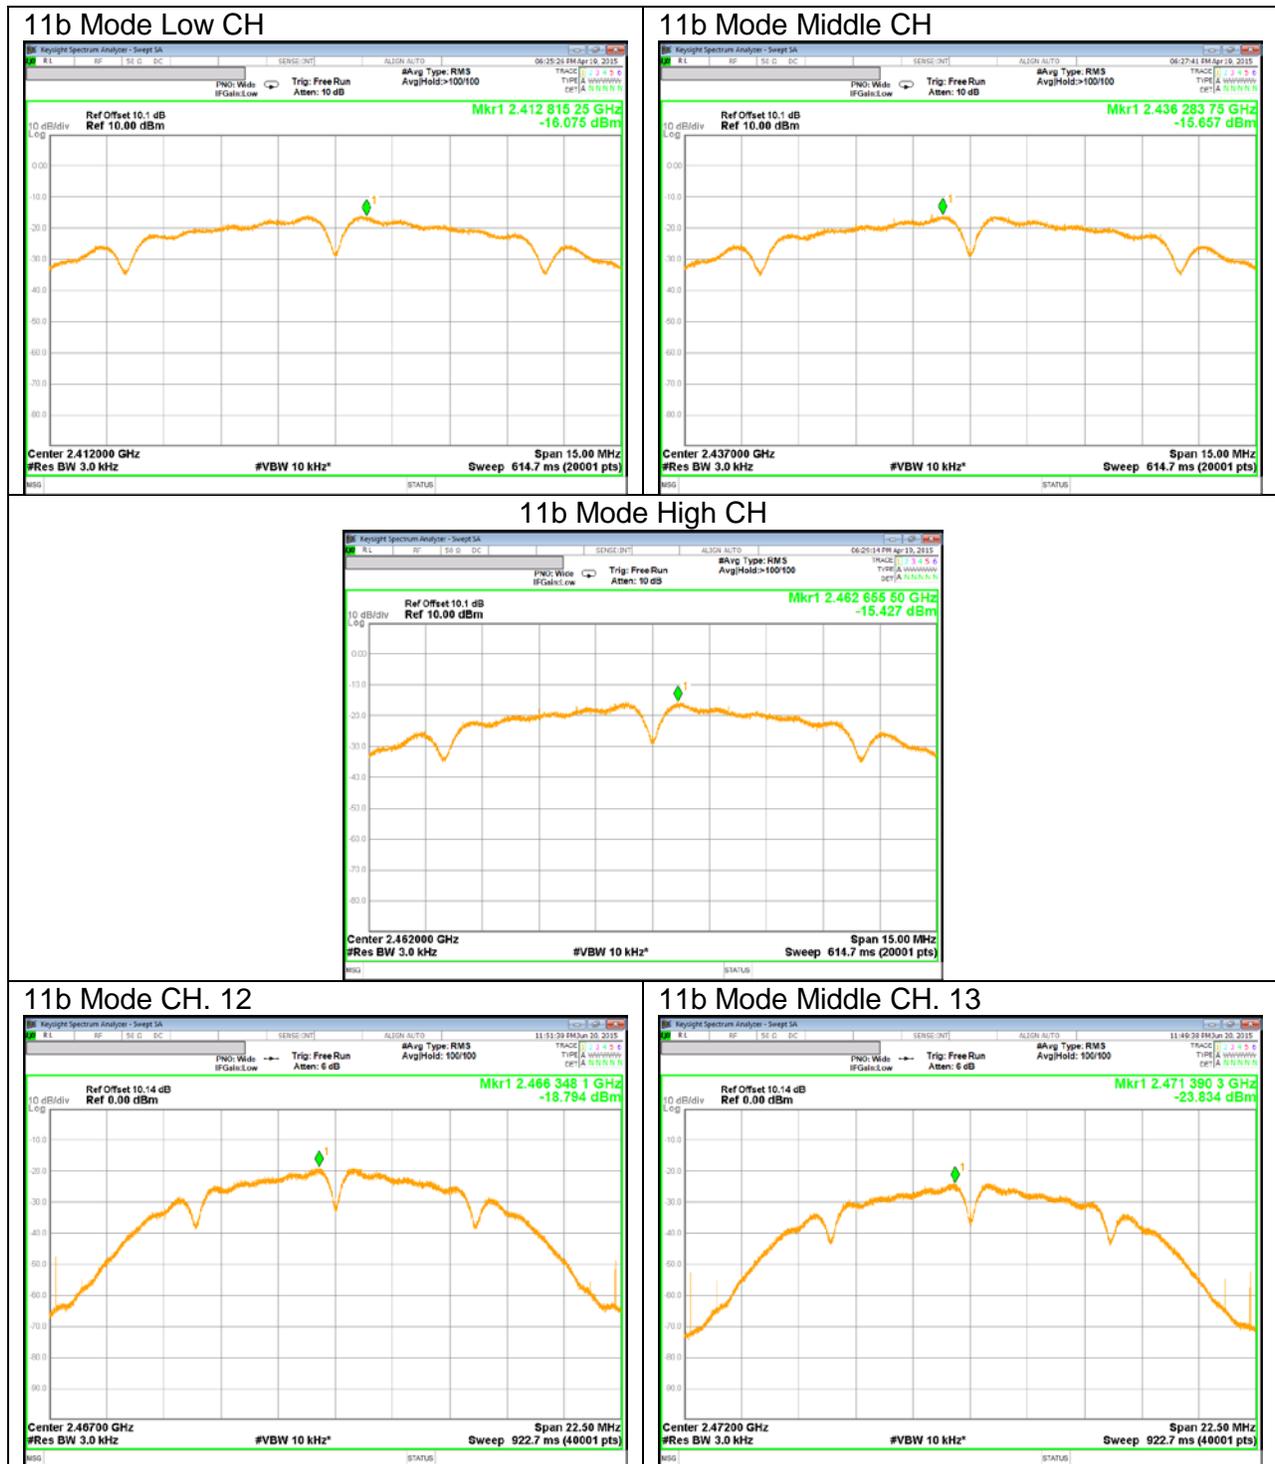

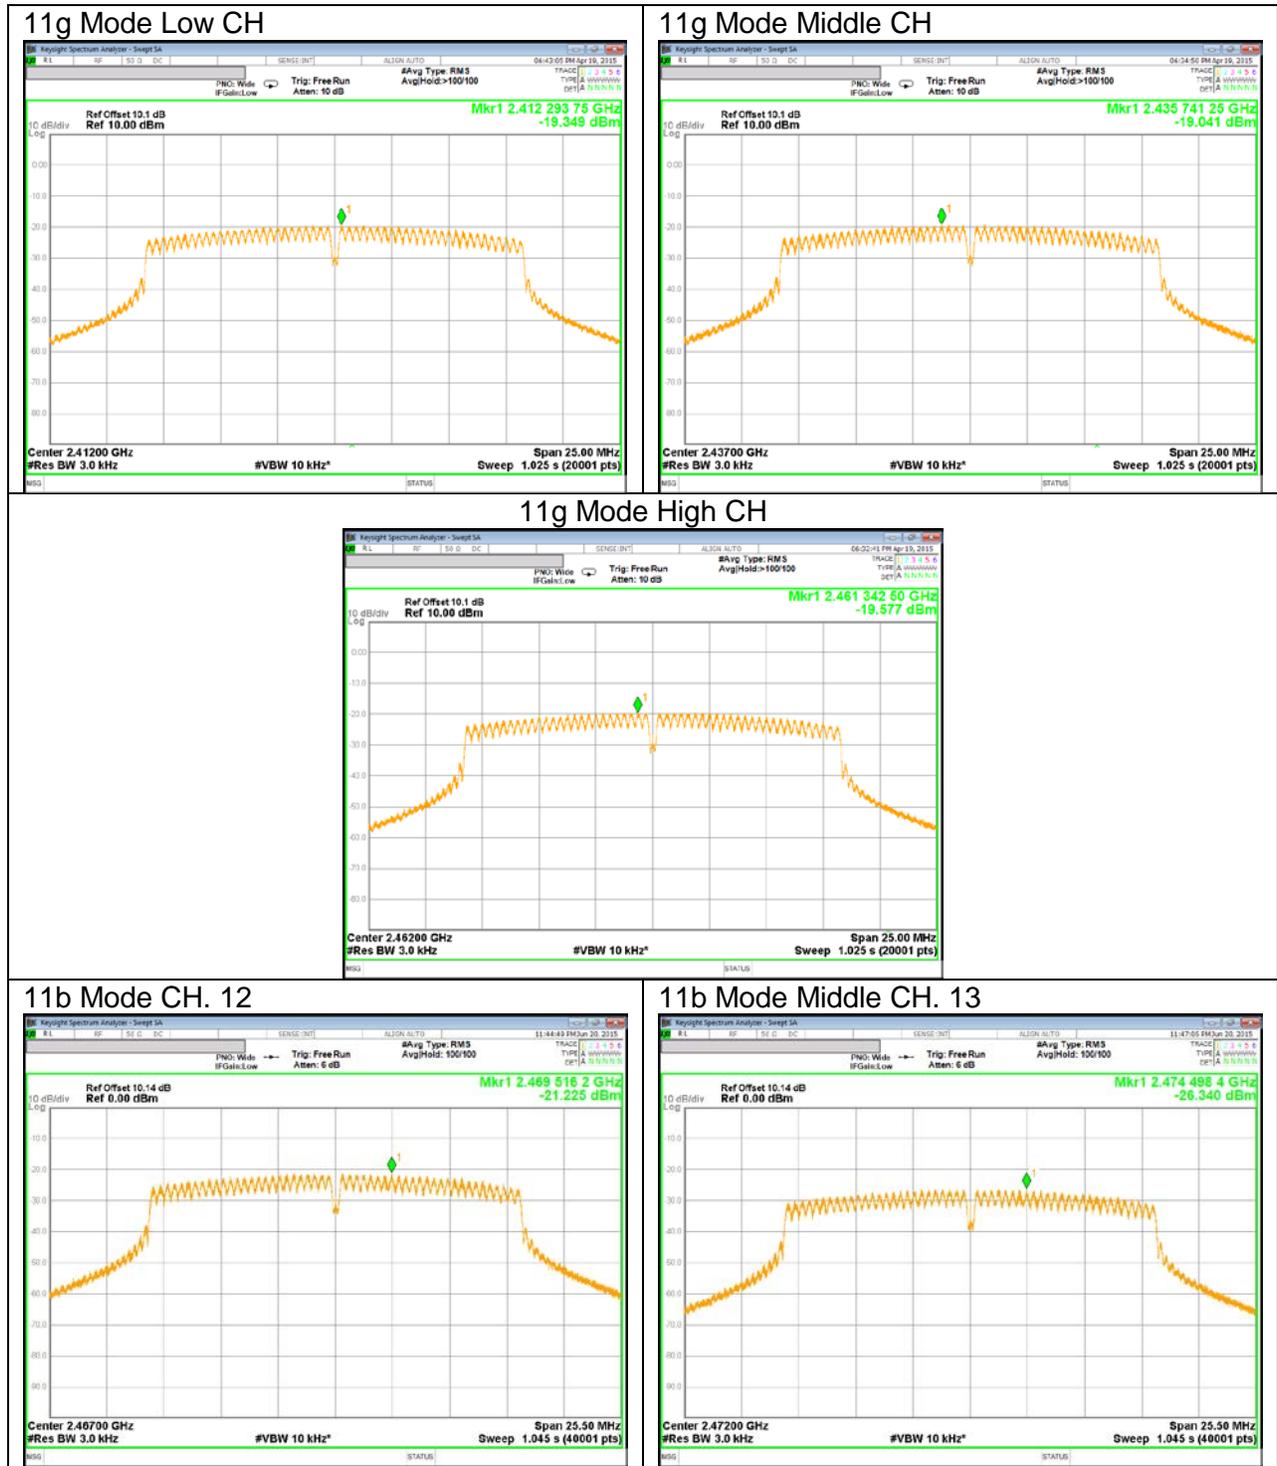

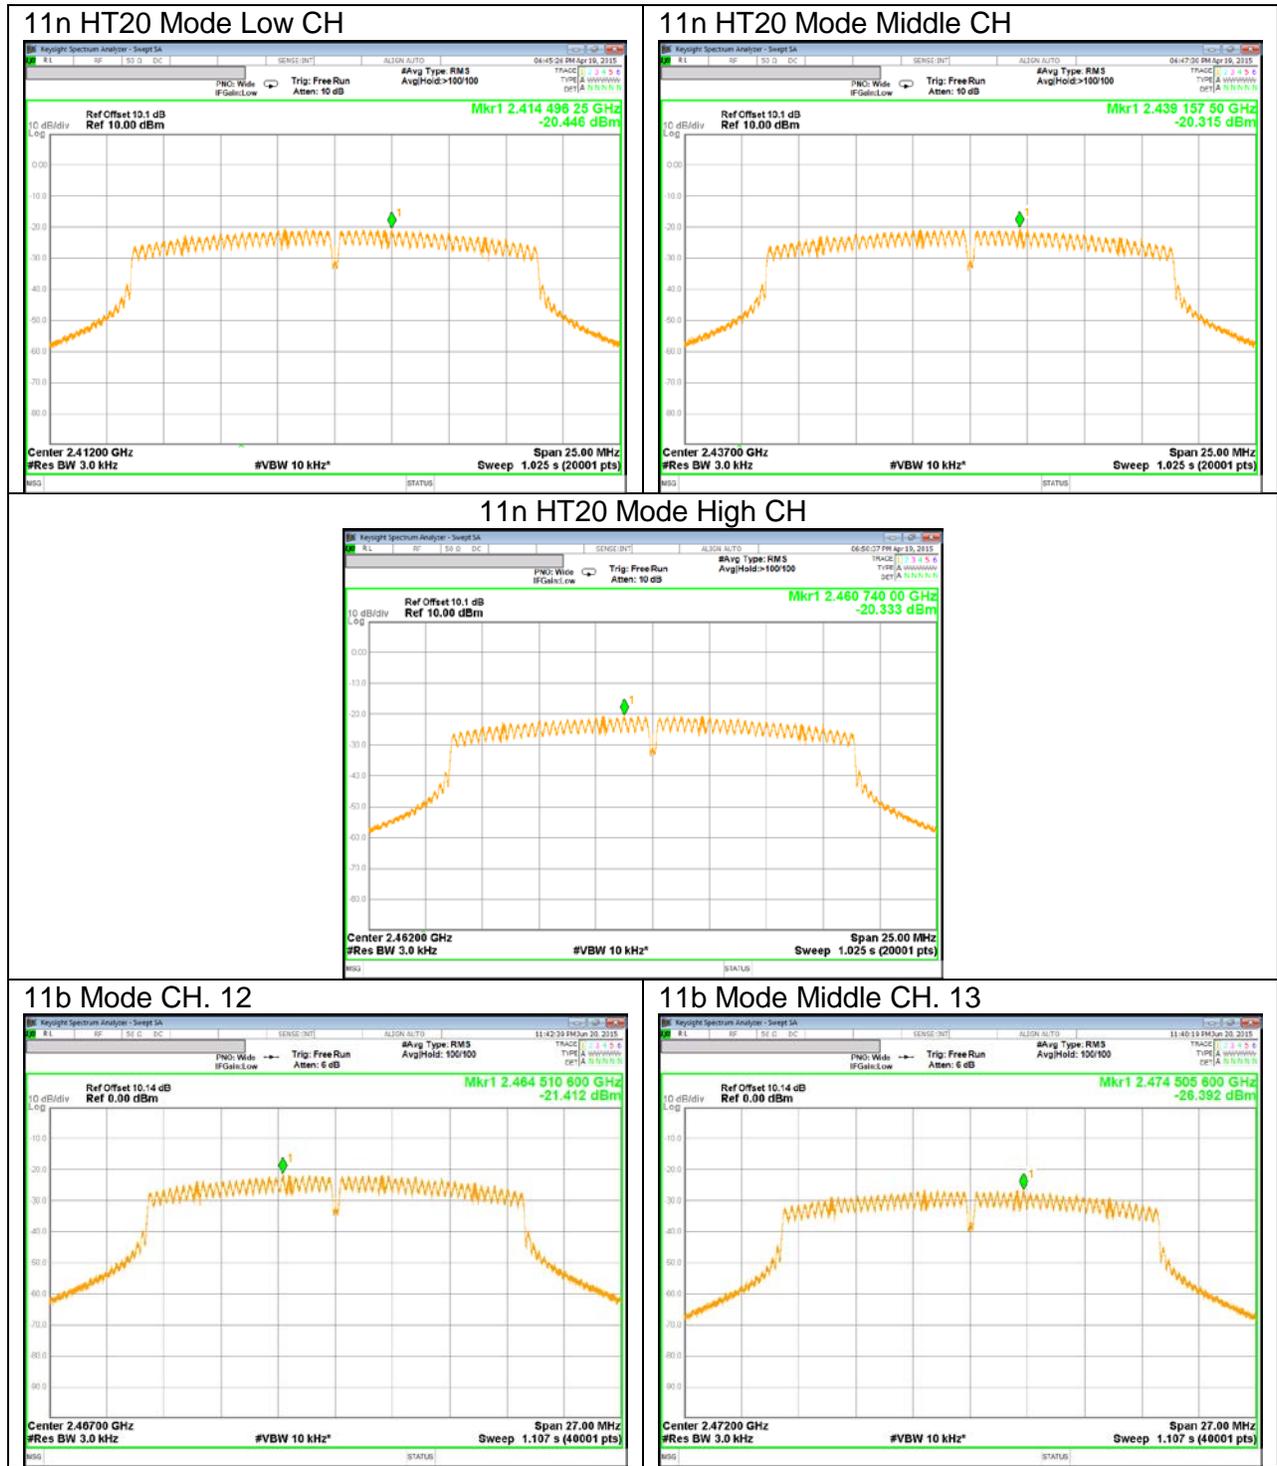

## 10.6. OUT-OF-BAND EMISSIONS

### LIMITS

FCC §15.247 (d)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.




**LOW CHANNEL BANDEDGE**

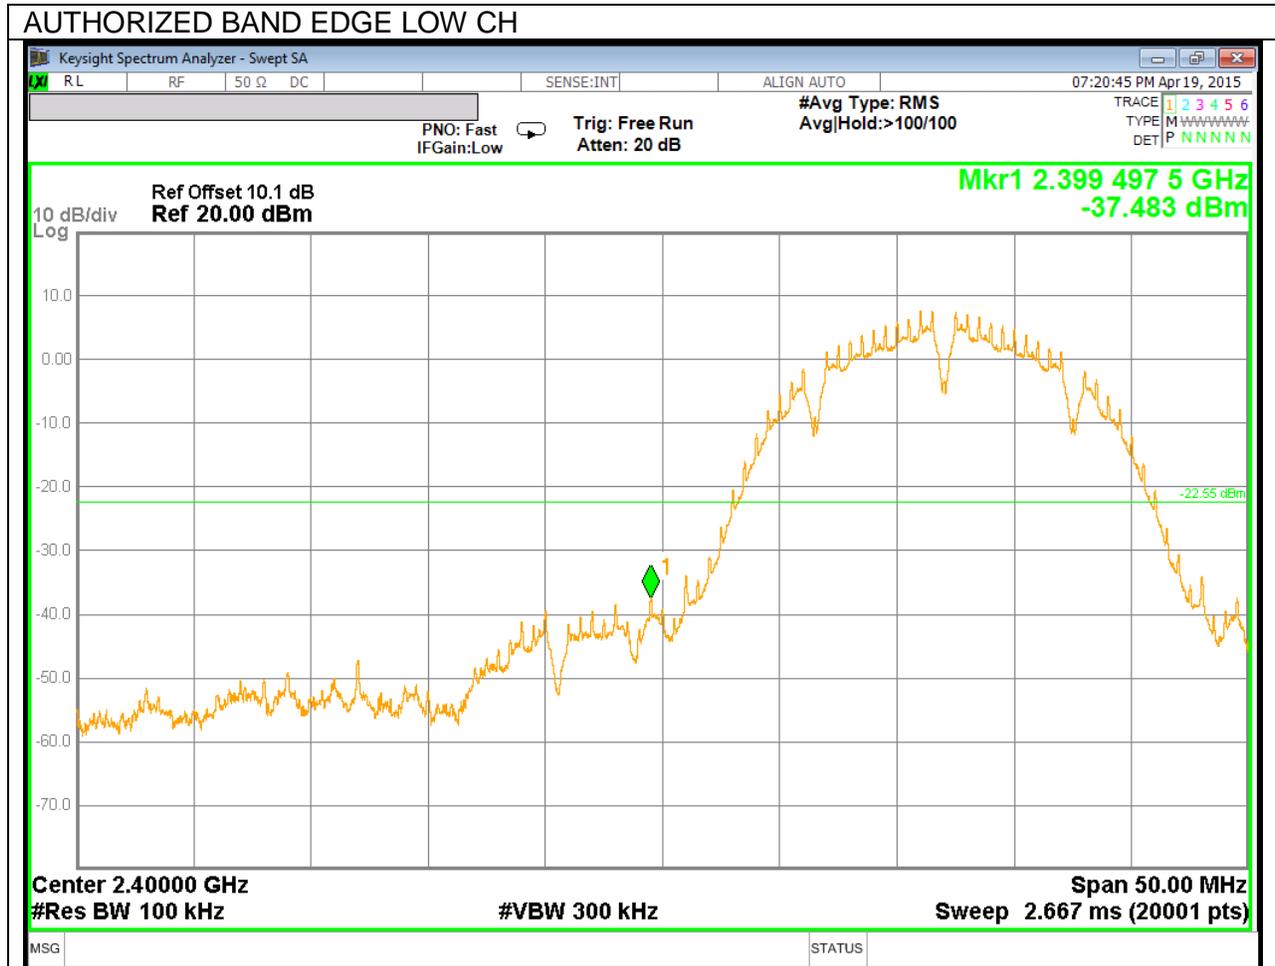


**HIGH CHANNEL BANDEDGE**

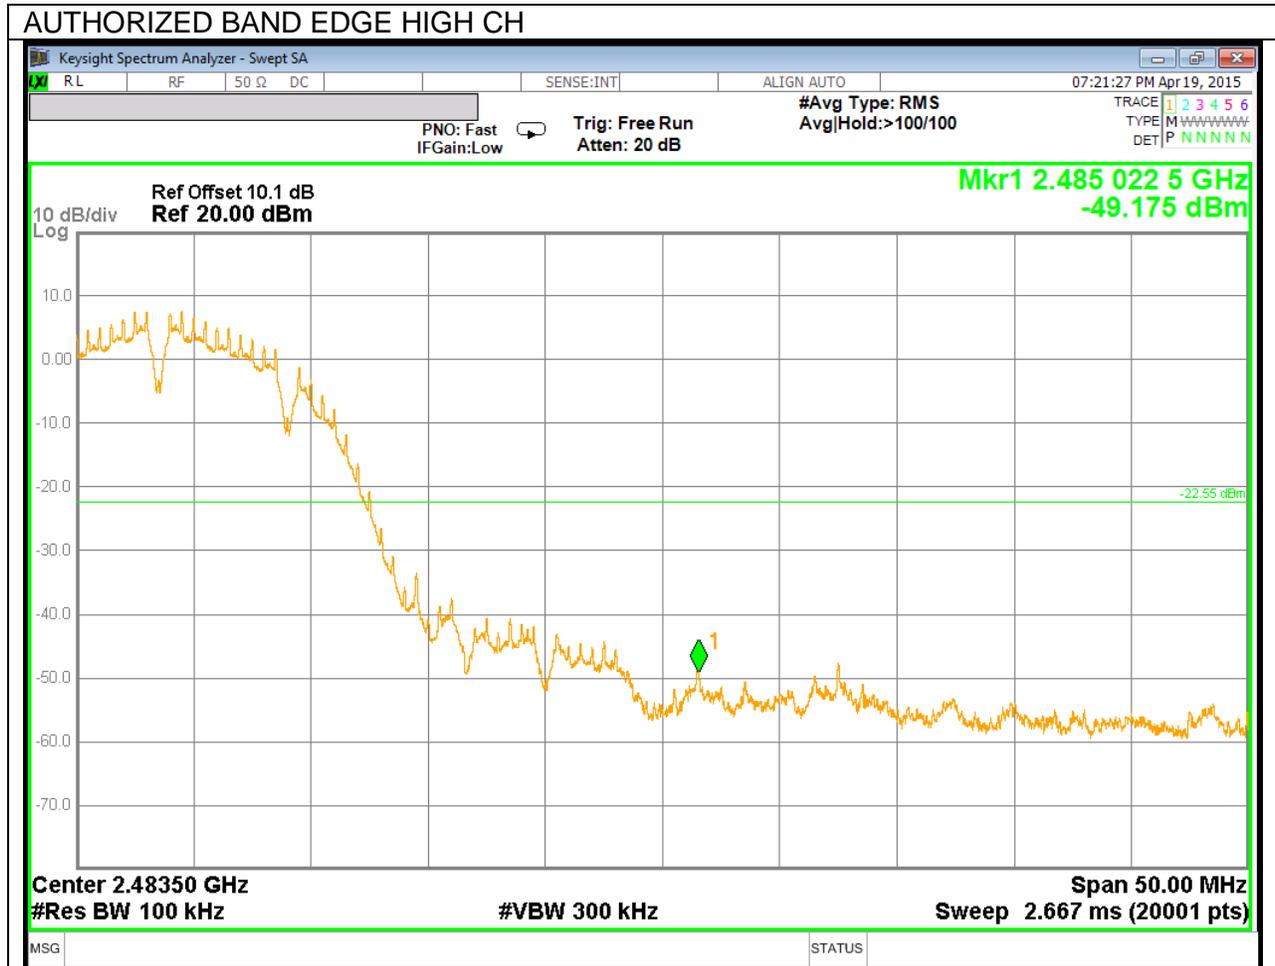


**OUT-OF-BAND EMISSIONS**

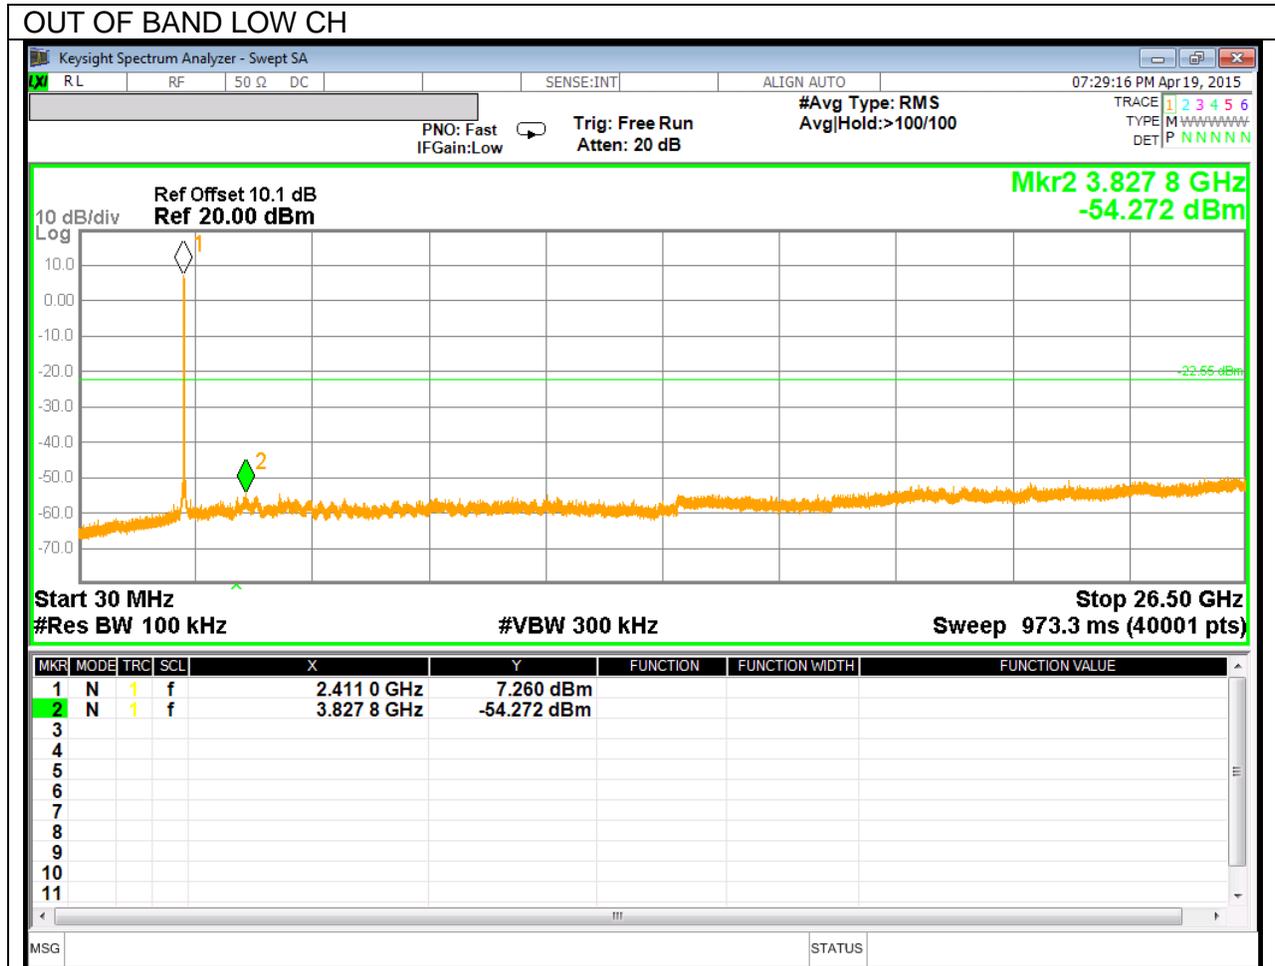

OUT OF BAND MID CH

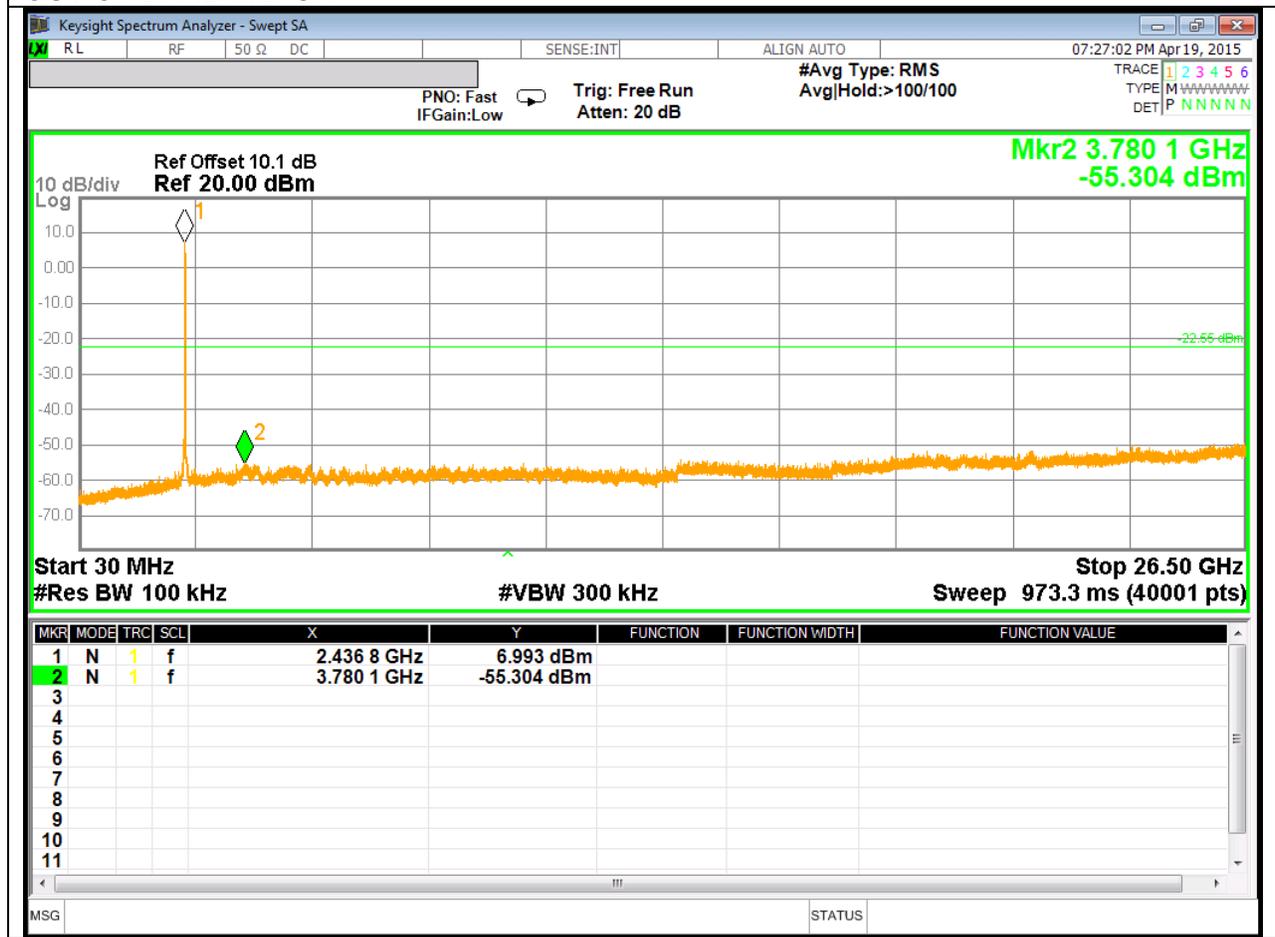


OUT OF BAND HIGH CH

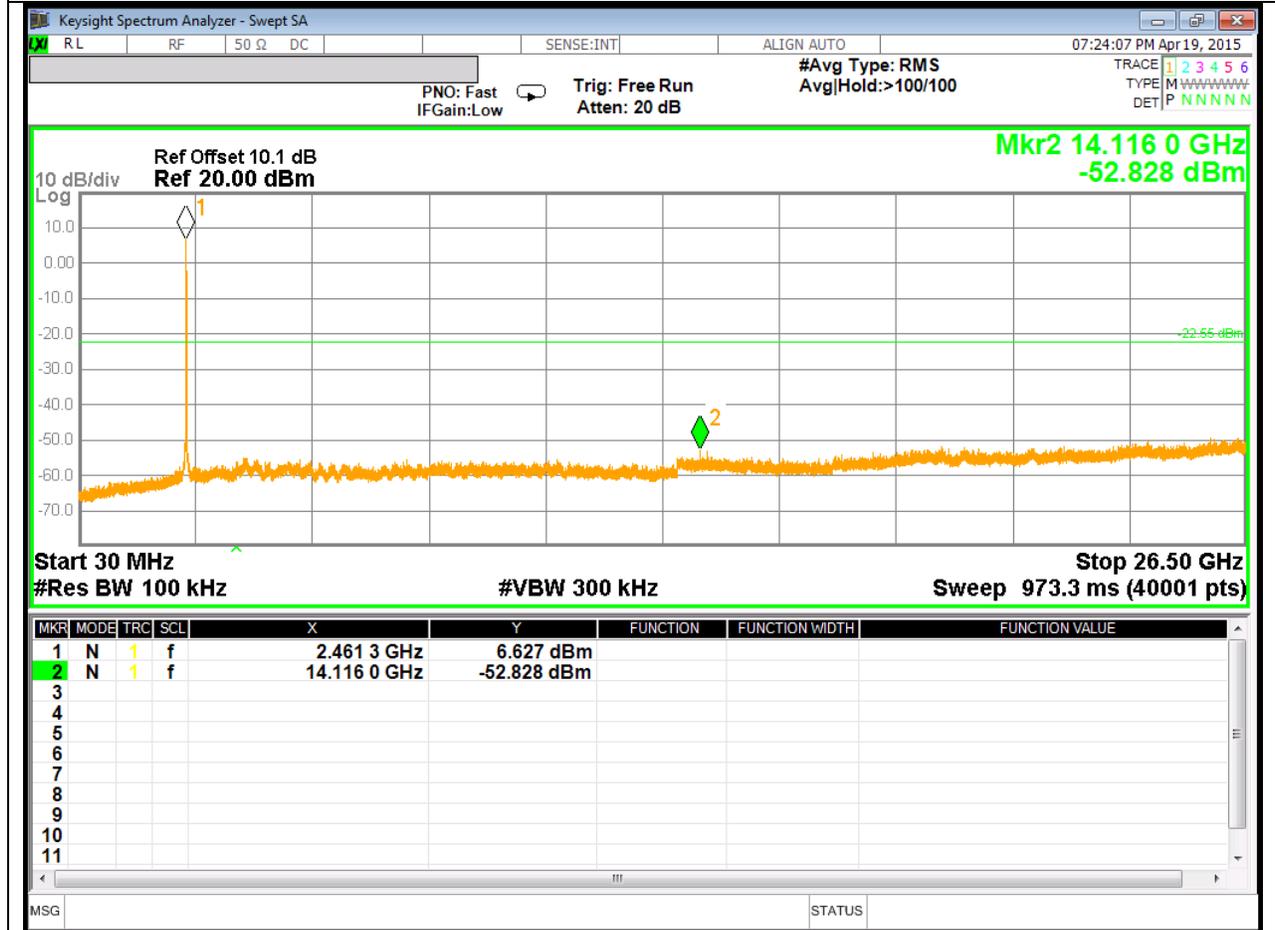


### 10.6.2. 802.11g MODE IN THE 2.4 GHZ BAND


#### IN-BAND REFERENCE LEVEL

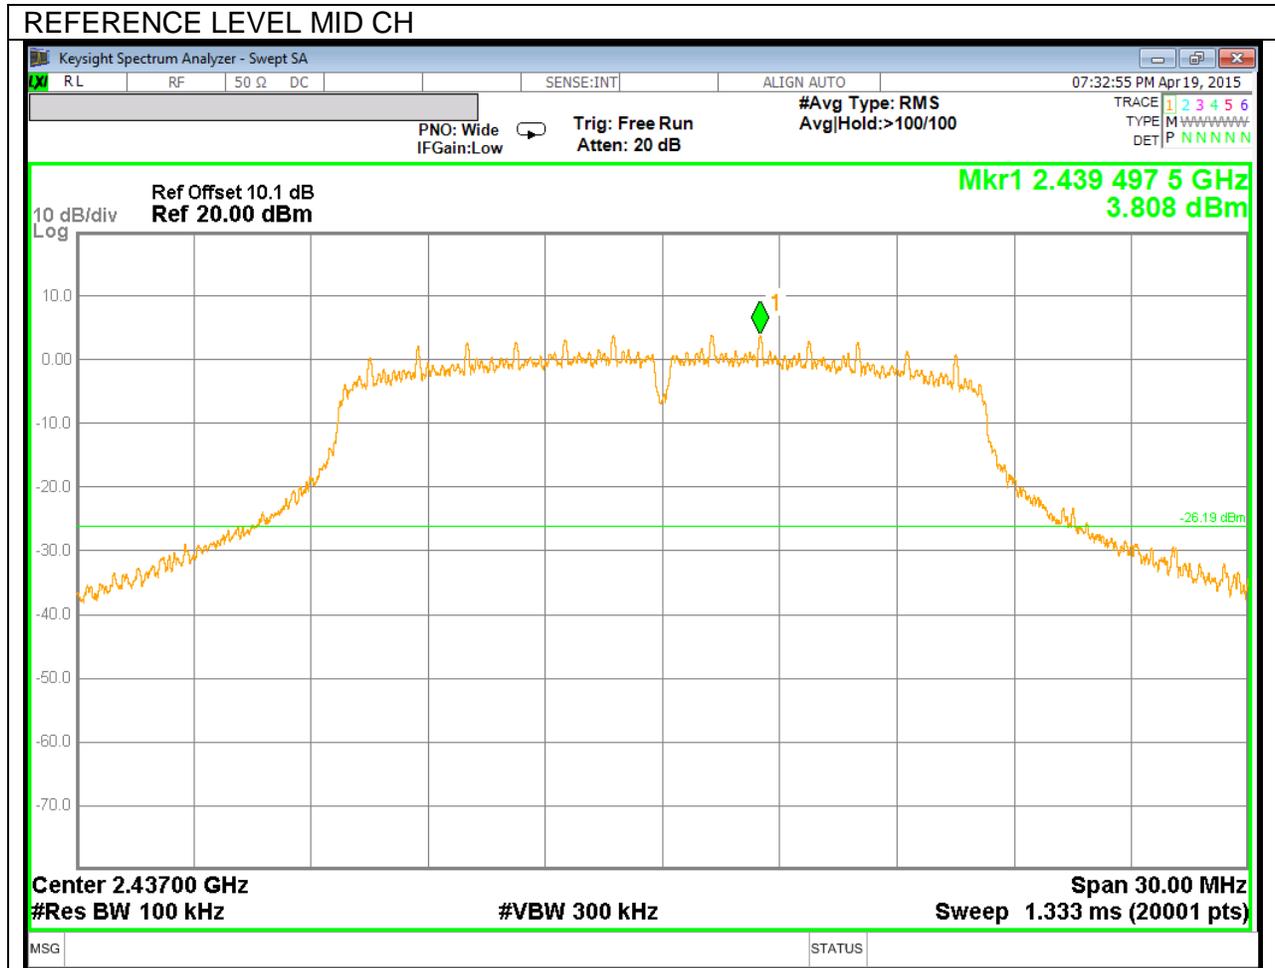


**LOW CHANNEL BANDEDGE**

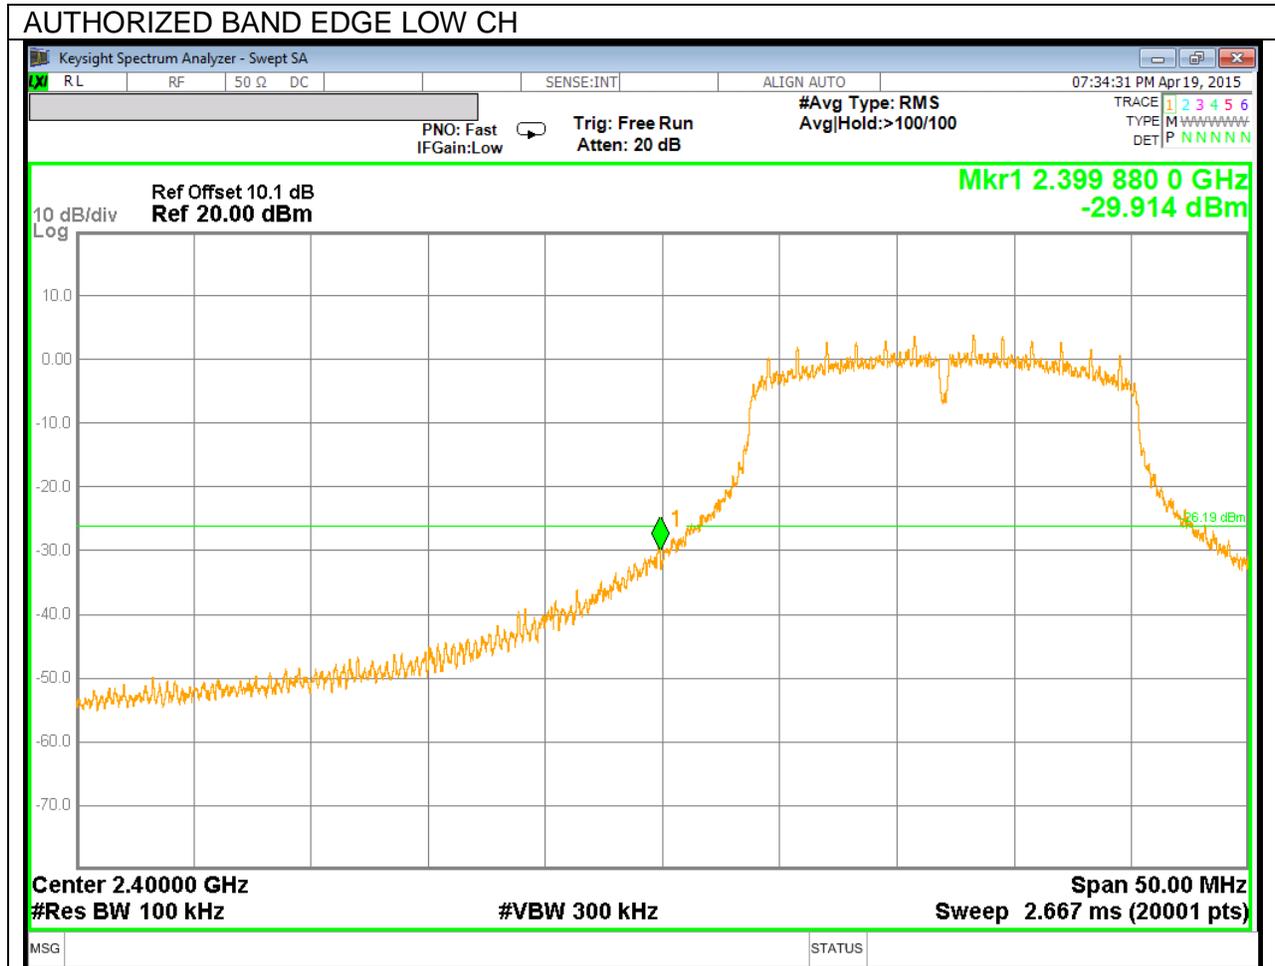


**HIGH CHANNEL BANDEDGE**

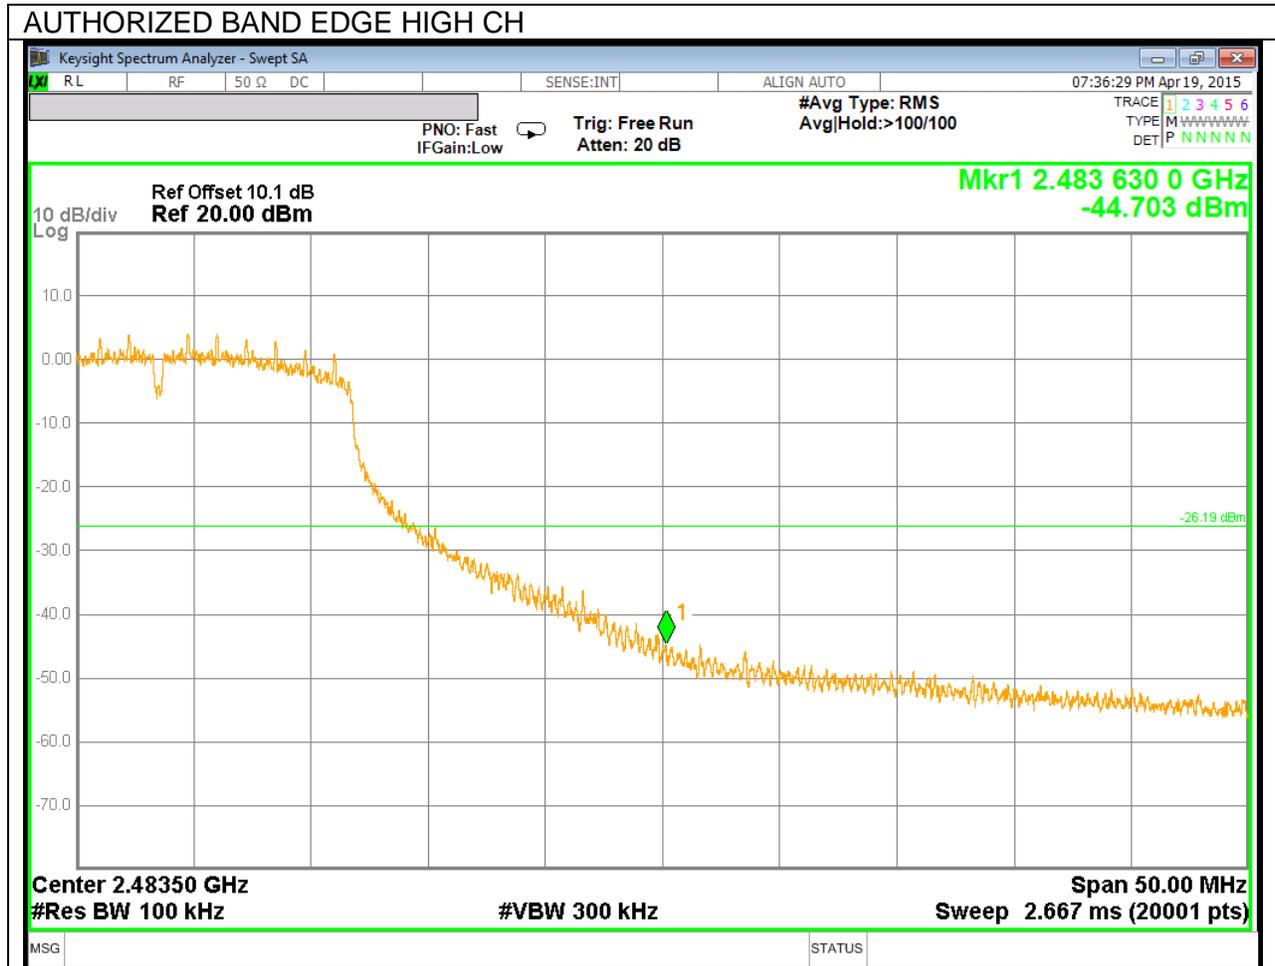


**OUT-OF-BAND EMISSIONS**

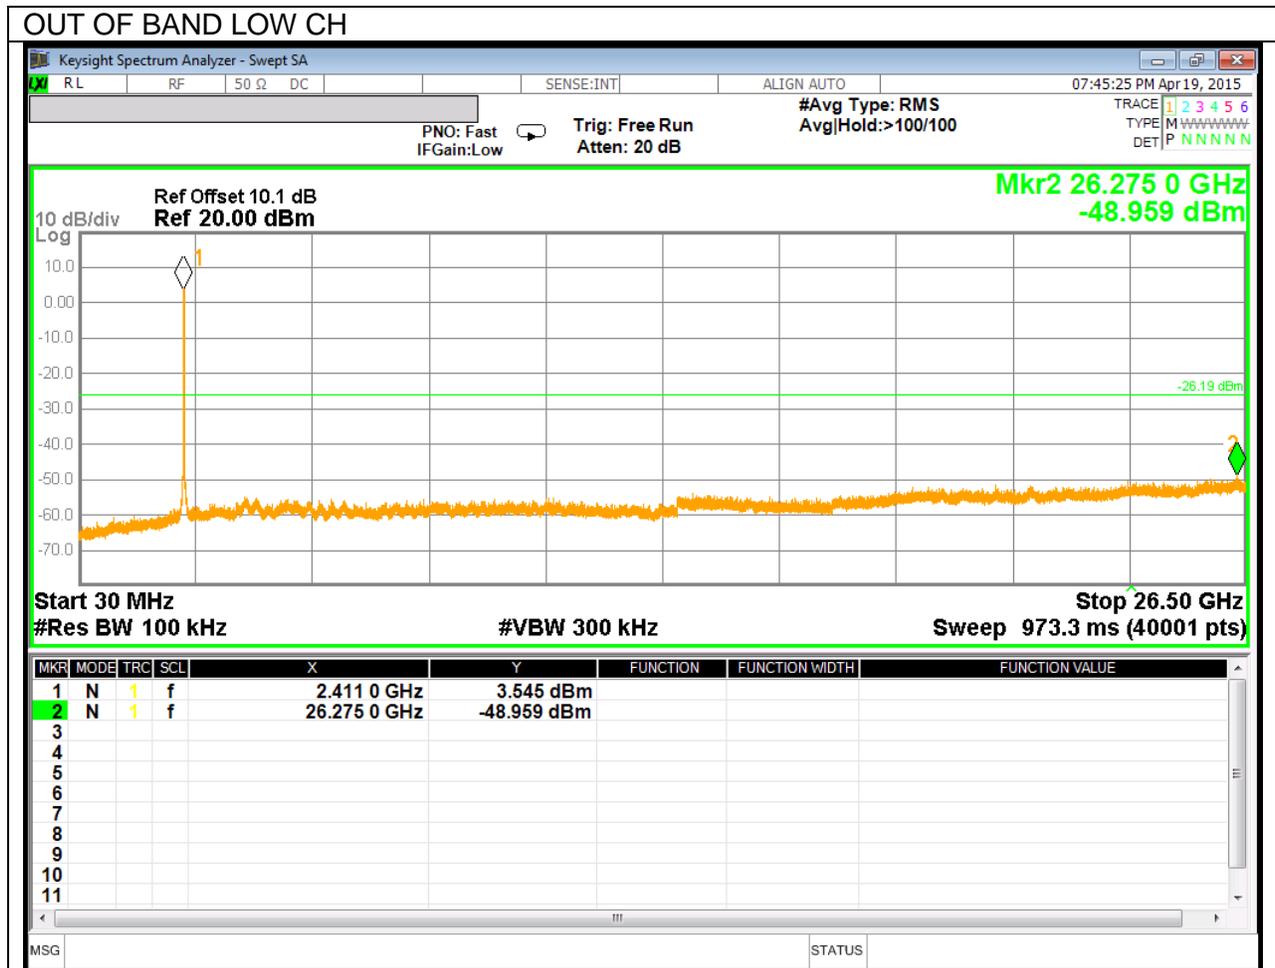

OUT OF BAND MID CH

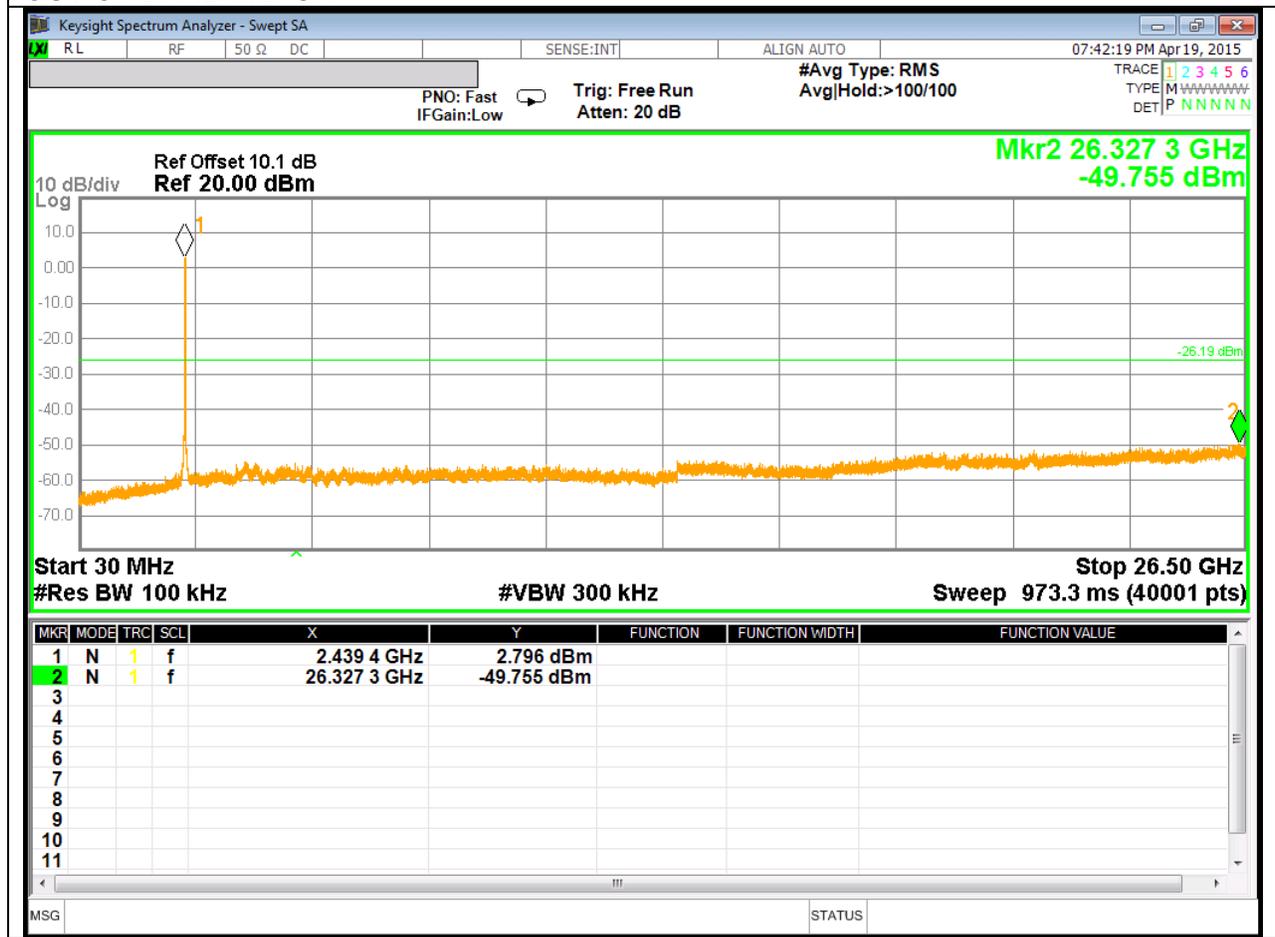


OUT OF BAND HIGH CH

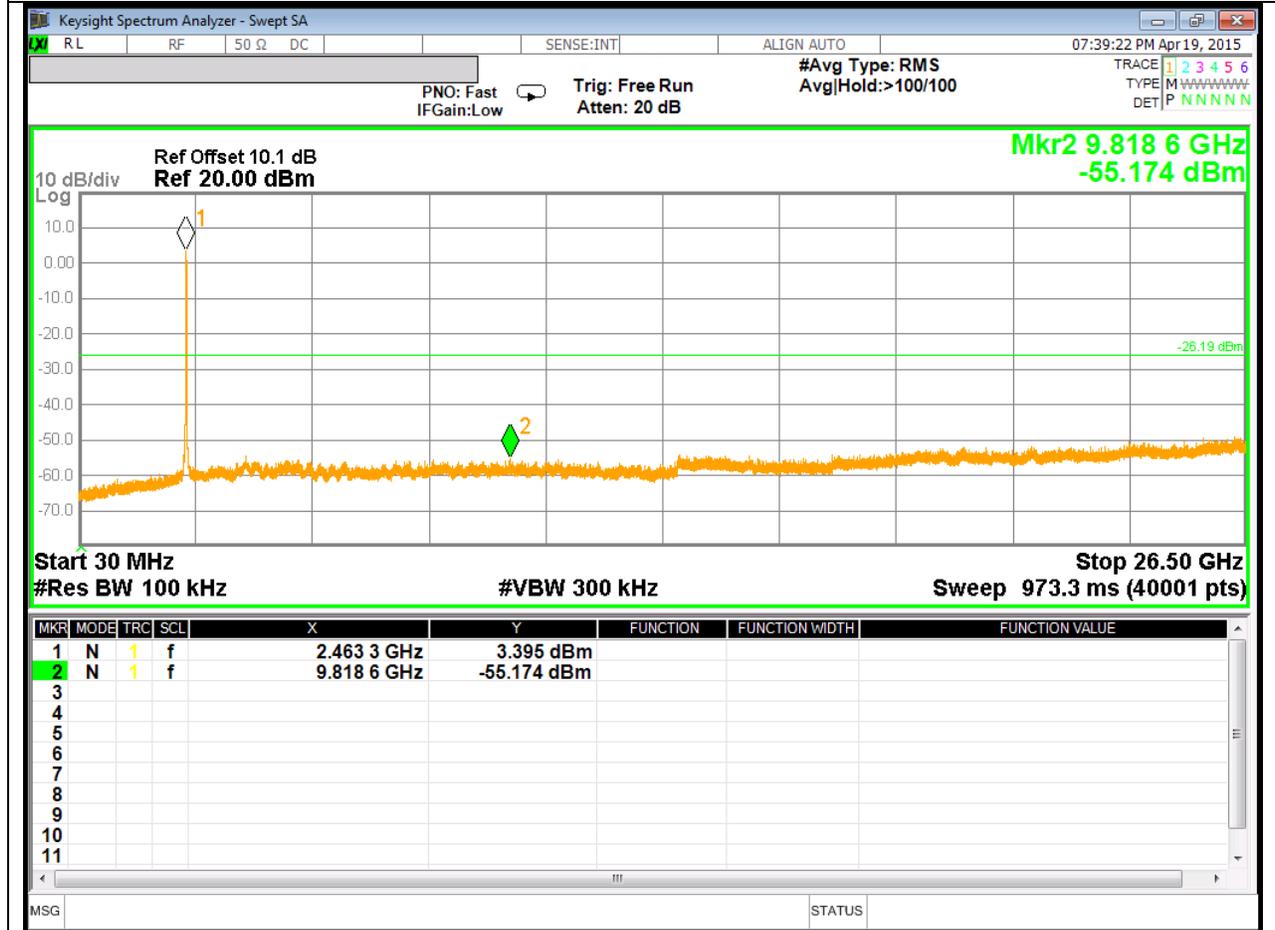





**LOW CHANNEL BANDEDGE**

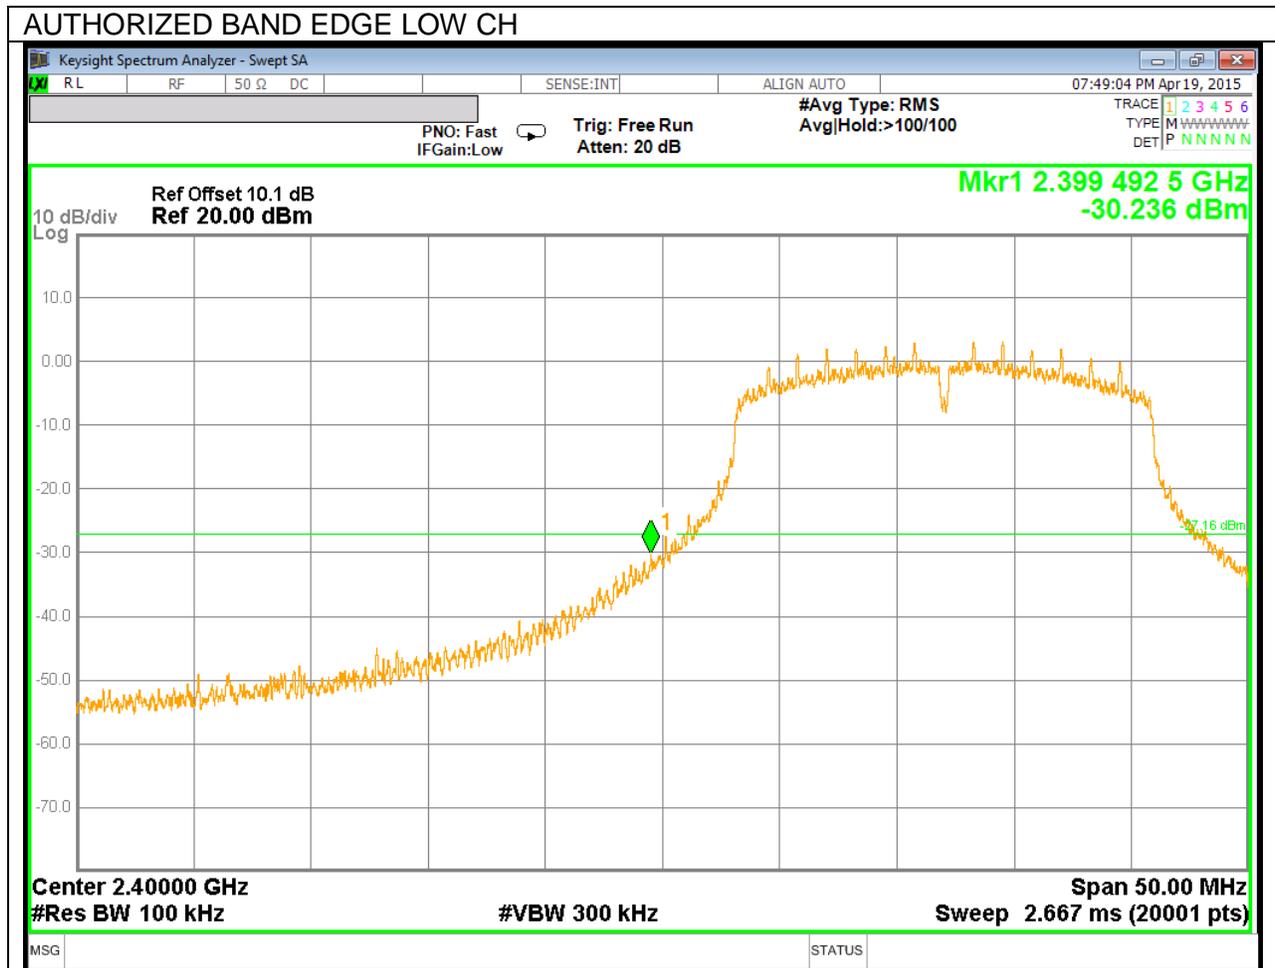

**HIGH CHANNEL BANDEDGE**

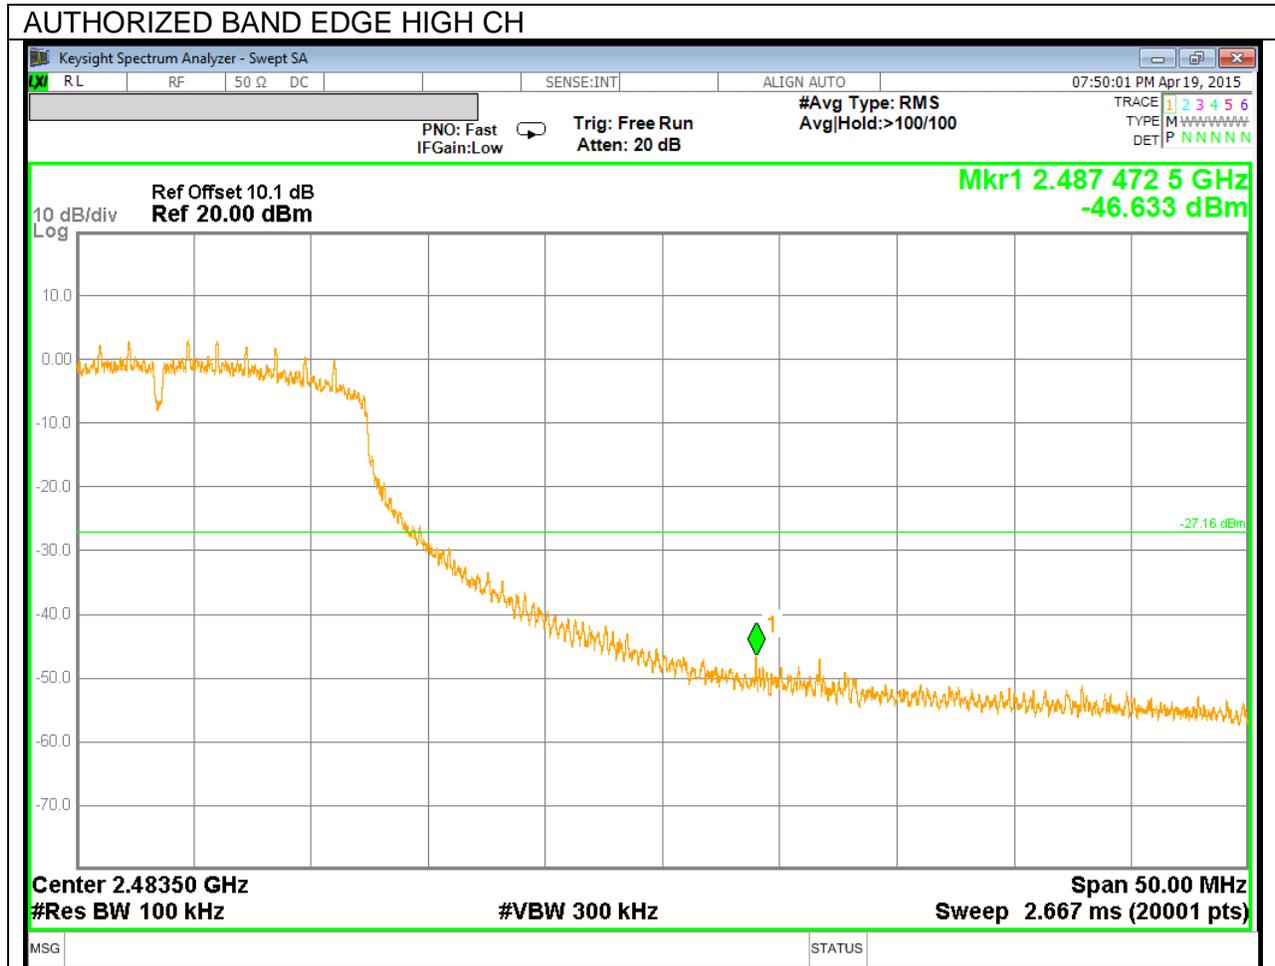


**OUT-OF-BAND EMISSIONS**

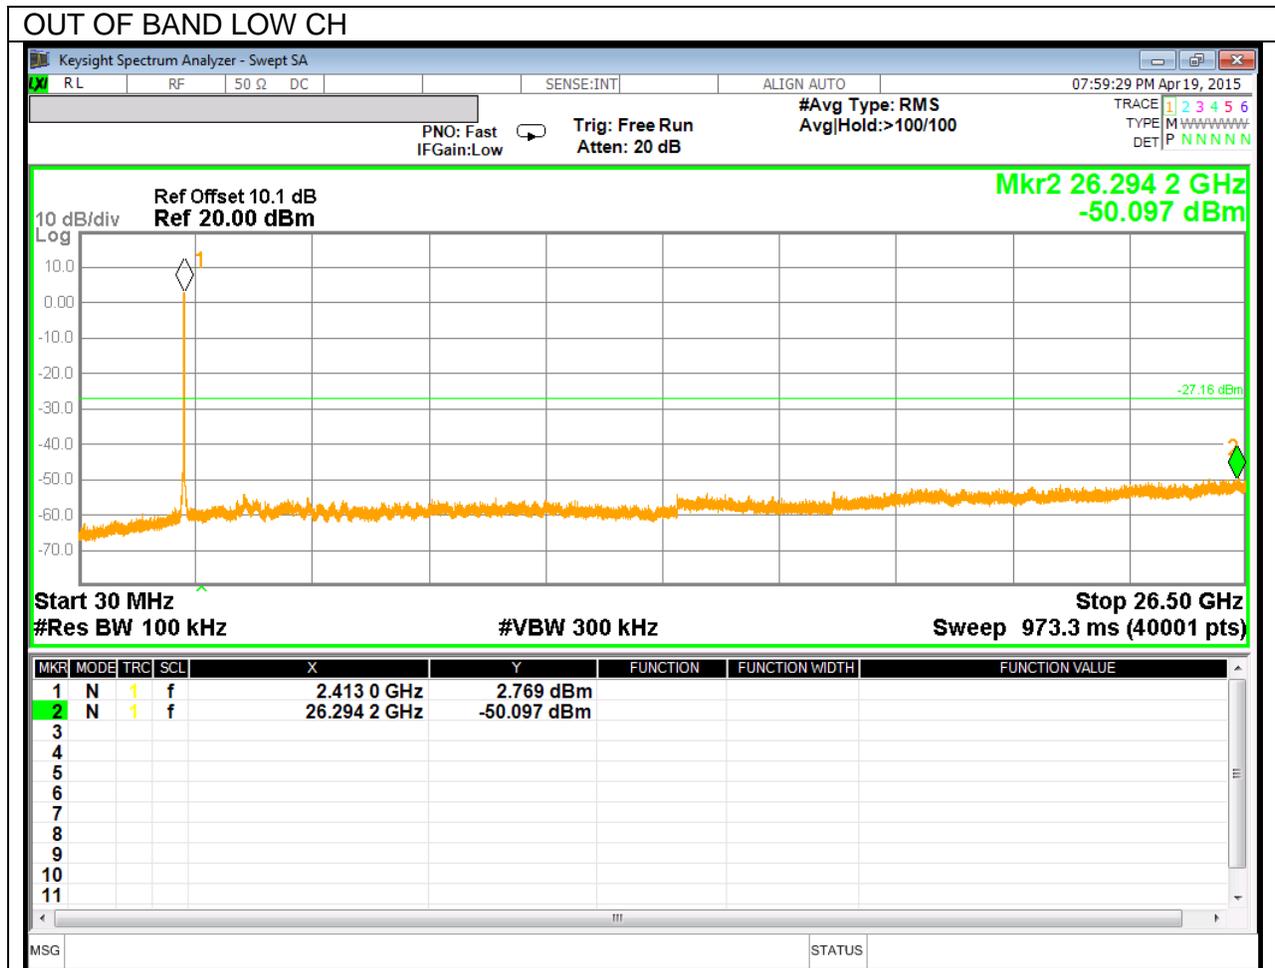






### 10.6.1. Bandedge Emission at Channel 12

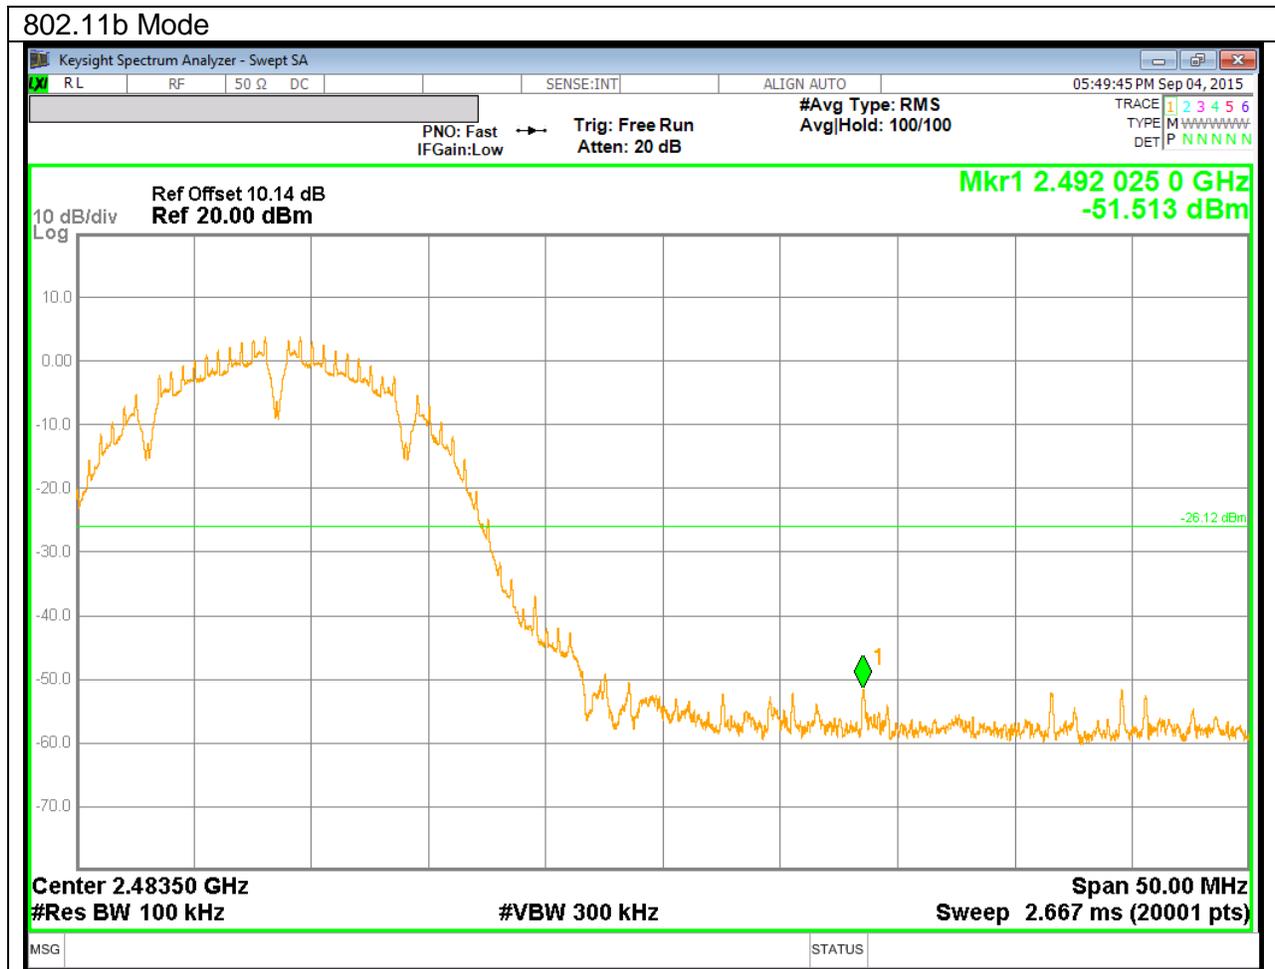

802.11g Mode

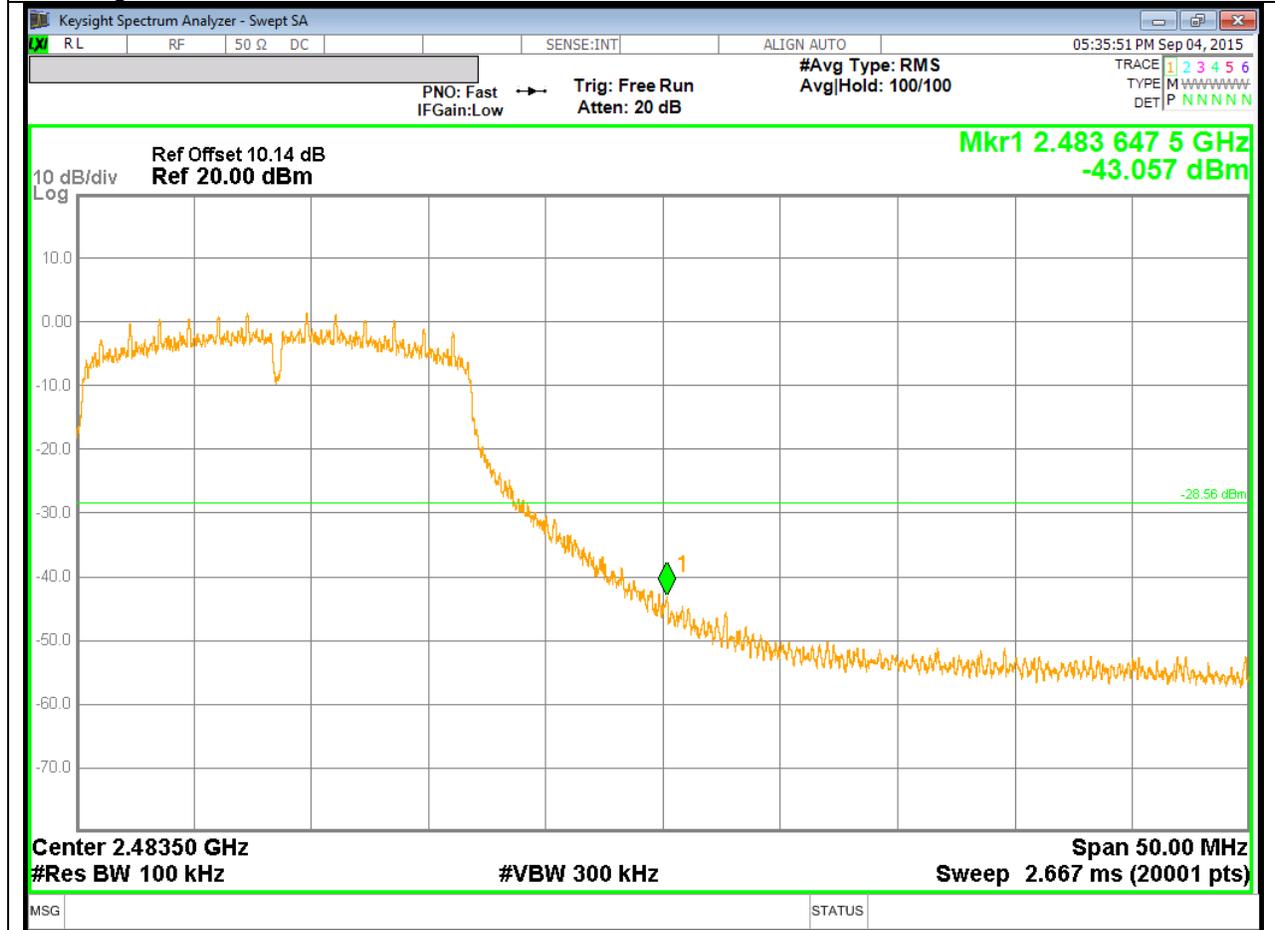

802.11n Mode

