



CERTIFICATION TEST REPORT

Report Number. : 4790406775-E3V2

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-T630

FCC ID : A3LSMT630

EUT Description : BT/BLE, DTS/UNII a/b/g/n/ac/ax and NFC.

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

2022-08-03

Prepared by:

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2022-07-26	Initial issue	Dexter(Hyunsik) Yun
V2	2022-08-03	Updated to address TCB's question	Dexter(Hyunsik) Yun

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
1.1. INTRODUCTION OF TEST DATA DEVIATION	6
1.2. DIFFERENCE	6
1.3. SPOT CHECK VERIFICATION DATA.....	6
1.4. REFERENCE DETAIL.....	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. DECISION RULES AND MEASUREMENT UNCERTAINTY	8
4.1. METROLOGICAL TRACEABILITY.....	8
4.2. SAMPLE CALCULATION.....	8
4.3. MEASUREMENT UNCERTAINTY	8
4.4. DECISION RULES.....	8
5. EQUIPMENT UNDER TEST	9
5.1. EUT DESCRIPTION.....	9
5.2. MAXIMUM OUTPUT POWER.....	9
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	9
5.4. WORST-CASE CONFIGURATION AND MODE	10
5.5. DESCRIPTION OF TEST SETUP.....	10
6. TEST AND MEASUREMENT EQUIPMENT	12
7. TEST RESULTS SUMMARY	13
8. MEASUREMENT METHODS	14
9. ANTENNA PORT TEST RESULTS	15
9.1. ON TIME AND DUTY CYCLE	15
9.2. 20 dB BANDWIDTH	16
9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	16
9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	16
9.3. HOPPING FREQUENCY SEPARATION.....	19
9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	20
9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	20
9.4. NUMBER OF HOPPING CHANNELS	21
9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	22
9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	24
9.5. AVERAGE TIME OF OCCUPANCY.....	26

9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	27
9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	31
9.6. <i>OUTPUT POWER</i>	35
9.6.1. BASIC DATA RATE GFSK MODULATION.....	35
9.6.2. ENHANCED DATA RATE PI/4-DPSK MODULATION	35
9.6.3. ENHANCED DATA RATE 8PSK MODULATION	36
9.6.4. OUTPUT POWER PLOTS.....	37
9.7. <i>AVERAGE POWER</i>	40
9.7.1. BASIC DATA RATE GFSK MODULATION.....	40
9.7.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION	40
9.7.3. ENHANCED DATA RATE 8PSK MODULATION	41
9.8. <i>CONDUCTED SPURIOUS EMISSIONS</i>	42
9.8.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	43
9.8.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	47
10. RADIATED TEST RESULTS	51
10.1. <i>TRANSMITTER ABOVE 1 GHz</i>	53
10.1.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	53
10.1.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	67
10.2. <i>WORST CASE BELOW 1 GHz</i>	81
11. AC POWER LINE CONDUCTED EMISSIONS	82
11.1.1. AC Power Line(C to C)	83
11.1.2. AC Power Line(C to A)	85
12. SPOT-CHECK TEST RESULT	87

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: BT/BLE, DTS/UNII a/b/g/n/ac/ax and NFC
MODEL: SM-T630
SERIAL NUMBER: R32T5003C8X, R32T50052FD (CONDUCTED, Original);
R32T5003G0W, R32T5004ZEX, R32T5004ZHZ (RADIATED, Original);
R32T6005G6X (RADIATED, Spot-check);
DATE TESTED: 2022-06-20 ~ 2022-07-26(Original);
2022-07-06 ~ 2022-07-21 (Spot-check);

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



Seokhwan Hong
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Dexter(Hyunsik) Yun
Suwon Lab Engineer
UL Korea, Ltd.

1.1. INTRODUCTION OF TEST DATA DEVIATION

This report referenced from the FCC ID: A3LSMT636B DSS Bluetooth(FCC CFR 47 Part 15C). And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

1.2. DIFFERENCE

Except for removing WWAN RF components, The SM-T630 model shares the same enclosure and circuit board as SM-T636B. The Bluetooth antennas and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary radiated emissions that the performance of the SM-T630 remains representative of SM-T636B. The test data of SM-T636B being submitted for this application to cover Bluetooth features.

1.3. SPOT CHECK VERIFICATION DATA

(Worst case of the radiated band-edge and radiated spurious emissions)

Band	Test Item	Mode	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
					SM-T636B Results	SM-T630 Results		
					FCC ID : A3LSMT636B	FCC ID : A3LSMT630		
DSS BT (2.4GHz)	BANDEDGE	GFSK_ANT1	2480 MHz	54 dBuV/m	44.22 dBuV/m	43.95 dBuV/m	-0.27 dB	
	RSE	GFSK_ANT1	4882 MHz	54 dBuV/m	36.40 dBuV/m	34.99 dBuV/m	-1.41 dB	Noise floor
	BANDEDGE	GFSK_ANT2	2480 MHz	54 dBuV/m	43.86 dBuV/m	43.81 dBuV/m	-0.05 dB	
	RSE	GFSK_ANT2	9764 MHz	54 dBuV/m	48.28 dBuV/m	38.85 dBuV/m	-9.43 dB	Noise floor

Comparison of two models, upper deviation is within 3 dB range and all test results are under FCC Technical Limits.

1.4. REFERENCE DETAIL

Reference application that contains the reused reference data in the individual test reports:

Equipment Class	Reference FCC ID (Parent)	Application Type	Reference Test report number	Exhibit Type	Spot-Check Test Report Number
DTS	A3LSMT636B	Original Grant	4790406759-E3 (802.11b/g/n/ax)	Test Report	4790406775-E1 (802.11b/g/n/ax)
DTS	A3LSMT636B	Original Grant	4790406759-E4 (BLE)	Test Report	4790406775-E2 (BLE)
DSS	A3LSMT636B	Original Grant	4790406759-E5 (Bluetooth)	Test Report	4790406775-E3 (Bluetooth)
NII	A3LSMT636B	Original Grant	4790406759-E6 (802.11a/n/ac/ax)	Test Report	4790406775-E4 (802.11a/n/ac/ax)
DXX	A3LSMT636B	Original Grant	4790406759-E7 (NFC)	Test Report	4790406775-E5 (NFC)

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 15.247 Meas Guidance v05r02.
4. ANSI C63.10-2013.
5. KDB 484596 D01 Referencing Test Data v01

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1(3m semi-anechoic chamber)
<input checked="" type="checkbox"/>	Chamber 2(3m semi-anechoic chamber)
<input checked="" type="checkbox"/>	Chamber 3(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 4(3m Full-anechoic chamber)
<input type="checkbox"/>	Chamber 5(3m Full-anechoic chamber)

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.02 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.05 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.78 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.58 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULES

Decision rule for statement(s) of conformity is based on Procedure 2, Clause 4.4.3 in IEC Guide 115:2021.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

The EUT is a BT/BLE, DTS/UNII a/b/g/n/ac/ax and NFC.
 This test report addresses the BT(DSS) operational mode.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2 402 ~ 2 480	Basic GFSK	Average	18.314	67.827
		Peak	18.782	75.544
	Enhanced Pi/4-DPSK	Average	16.353	43.182
		Peak	18.827	76.331
	Enhanced 8PSK	Average	16.365	43.301
		Peak	19.240	83.946

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.
 Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes an internal antennas, with ANT 1's maximum gain of -2.5 dBi and ANT 2's maximum gain of -2.5 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

- Worst axis

ANT1	ANT2
Y	Z

GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA200	R37N6K421B2SE3	N/A
Data Cable	SAMSUNG	EP-DT725BWE	GH39-02020A	N/A
Charger	SAMSUNG	EP-TA800	R37N3MAH988DK3	N/A
Data Cable	SAMSUNG	EP-DN980	GH39-02115A	N/A
Earphone	SAMSUNG	GH59-15055A	EHS64AVFWE	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	A to C Type	Shielded	1.0 m	N/A
2	DC Power	1	C to C Type	Shielded	1.0 m	N/A
3	Audio	2	Mini-Jack	Unshielded	0.7 m	N/A


TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests. Test software enable BT communications.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

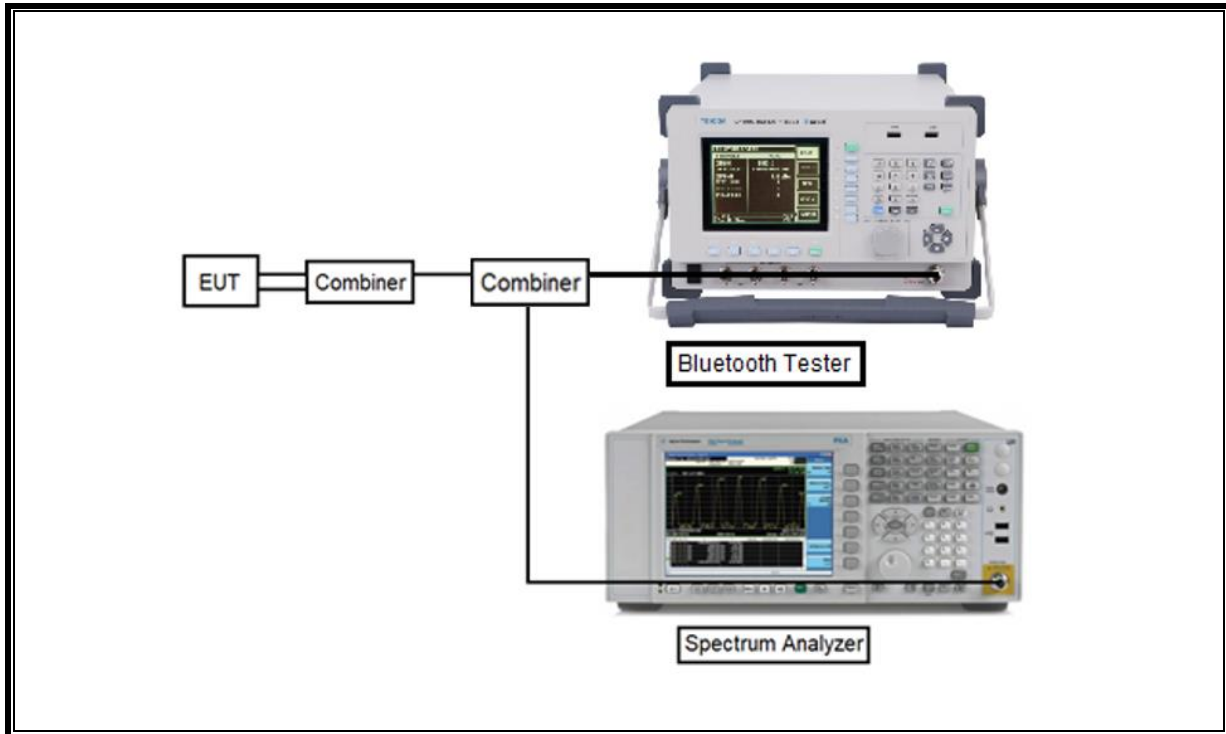

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

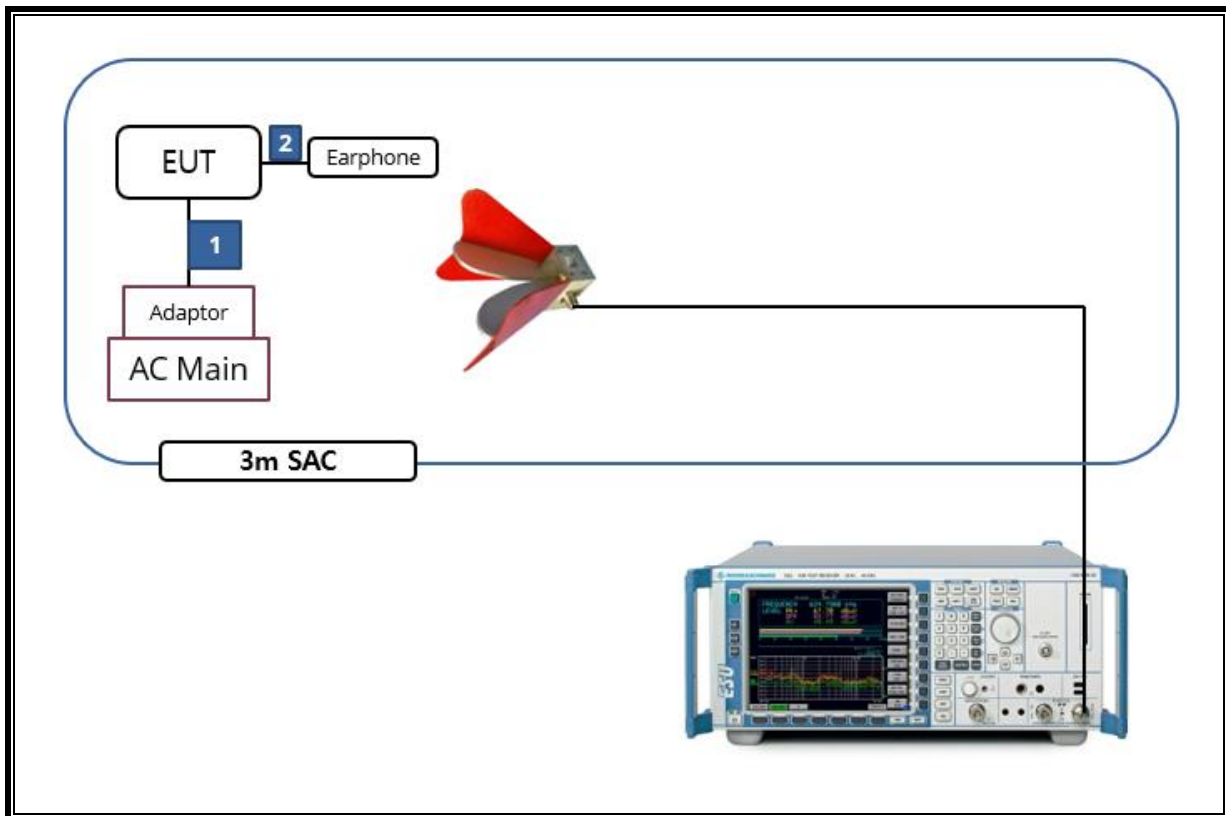

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	2022-08-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	2022-08-13
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	2022-08-13
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2023-10-06
Antenna, Horn, 18 GHz	ETS	3115	00167211	2022-07-27
Antenna, Horn, 18 GHz	ETS	3115	00161451	2022-08-15
Antenna, Horn, 18 GHz	ETS	3117	00168724	2022-07-27
Antenna, Horn, 18 GHz	ETS	3117	00168717	2022-08-15
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2022-08-04
Preamplifier	ETS	3116C-PA	00168841	2022-08-04
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	80108-0004	N/A
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	110367-0003	N/A
Preamplifier, 1000 MHz	Sonoma	310N	341282	2022-08-02
Preamplifier, 1000 MHz	Sonoma	310N	351741	2022-08-02
Preamplifier, 1000 MHz	Sonoma	310N	370599	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029168	2022-08-02
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	2022-08-04
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	2022-08-04
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9030B	MY60070693	2023-01-18
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9040B	MY60080268	2023-01-19
Average Power Sensor	Agilent / HP	U2000	MY54270007	2022-08-04
Average Power Sensor	Agilent / HP	U2000	MY54260010	2022-08-04
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	2022-08-04
Power Splitter	MINI-CIRCUITS	WA1534	UL003	2023-01-11
Power Splitter	MINI-CIRCUITS	WA1534	UL004	2023-01-11
Attenuator	PASTERNAK	PE7087-10	A009	2022-08-03
Attenuator	PASTERNAK	PE7087-10	A001	2022-08-03
Attenuator	PASTERNAK	PE7087-10	A008	2022-08-03
Attenuator	PASTERNAK	PE7004-10	2	2022-08-02
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2022-08-02
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	019	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	020	2022-08-02
LISN	R&S	ENV-216	101837	2022-08-05
Termination	WEINSCHEL	M1406A	T09	2022-08-03
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. TEST RESULTS SUMMARY

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
2.1051, 15.247(d)	Band Edge / Conducted Spurious Emission	-20 dBc	Conducted	PASS
15.247 (b)(1)	TX conducted output power	< 21 dBm		PASS
15.247 (a)(1)	Hopping frequency separation	> two-thirds of the 20 dB bandwidth		PASS
15.247 (a)(1)(iii)	Number of Hopping channels	More than 15 non-overlapping channels		PASS
15.247 (a)(1)(iii)	Avg Time of Occupancy	< 8 dBm		PASS
15.207(a)	AC Power Line conducted emissions	Section 11	Power Line conducted	PASS
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m(Av)	Radiated	PASS

8. MEASUREMENT METHODS

20dB BW : ANSI C63.10, Section 6.9.2

99% BW : ANSI C63.10, Section 6.9.3

HOPPING FREQUENCY SEPARATION : ANSI C63.10, Section 7.8.2

NUMBER OF HOPPING CHANNELS : ANSI C63.10, Section 7.8.3

AVERAGE TIME OF OCCUPANCY : ANSI C63.10, Section 7.8.4

OUTPUT POWER : ANSI C63.10, Section 7.8.5.

Out-of-band EMISSIONS (Conducted) : ANSI C63.10, Section 7.8.6, 7.8.8

Out-of-band EMISSIONS IN NON-RESTRICTED BANDS: ANSI C63.10, Section 6.

Out-of-band EMISSIONS IN RESTRICTED BANDS : ANSI C63.10, Section 6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS


None; for reporting purposes only.

PROCEDURE

ANSI C63.10, Section 11.6 : Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	On time [msec]	Period [msec]	Duty Cycle [%]	1/T Minimum VBW [kHz]
BDR	2.874	3.748	76.681	0.35
EDR	2.882	3.748	76.894	0.35

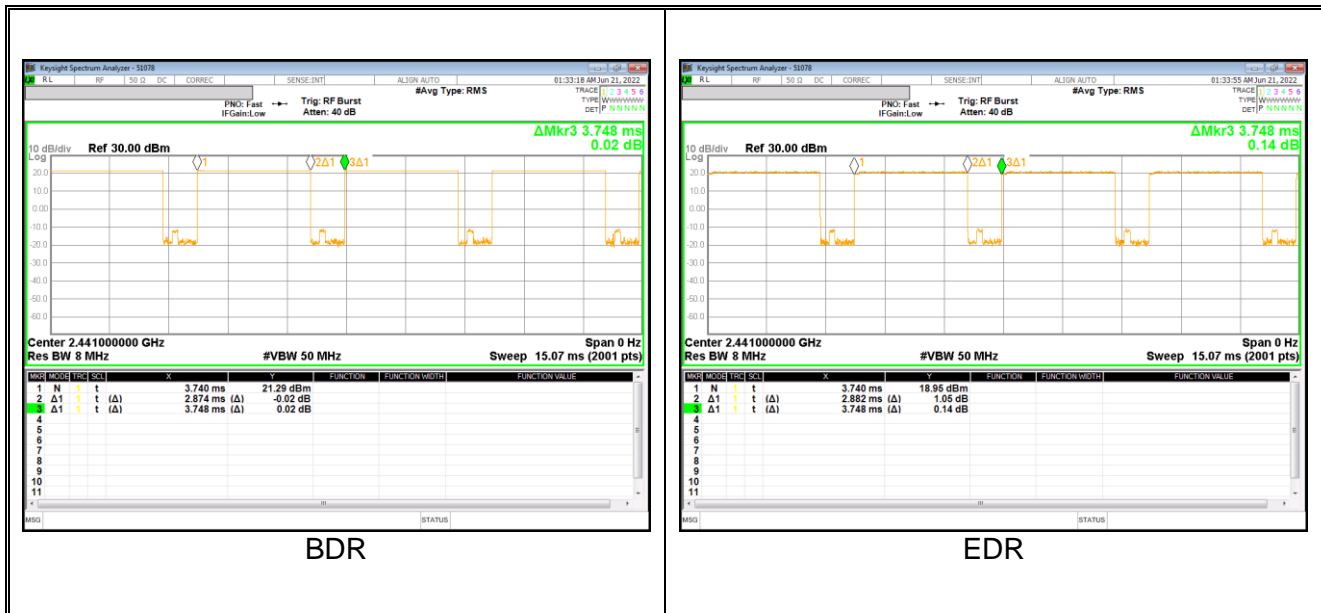

9.2. 20 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.


RESULTS

9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION


Ant.	Channel	Frequency [MHz]	20 dB Bandwidth [kHz]
ANT1	0	2 402	928.8
	39	2 441	929.8
	78	2 480	927.7
ANT2	0	2 402	930.2
	39	2 441	927.3
	78	2 480	928.0
Worst			930.2

9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION


Ant.	Channel	Frequency [MHz]	20 dB Bandwidth [kHz]
ANT1	0	2 402	1 272.0
	39	2 441	1 273.0
	78	2 480	1 271.0
ANT2	0	2 402	1 271.0
	39	2 441	1 271.0
	78	2 480	1 272.0
Worst			1 273.0

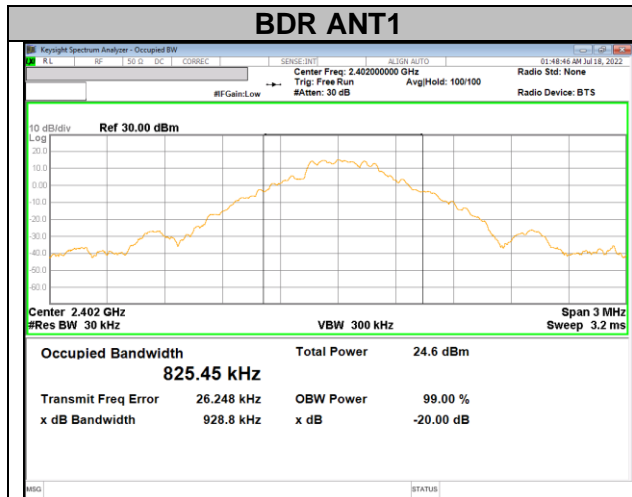


20 dB bandwidth / 0 CHANNEL

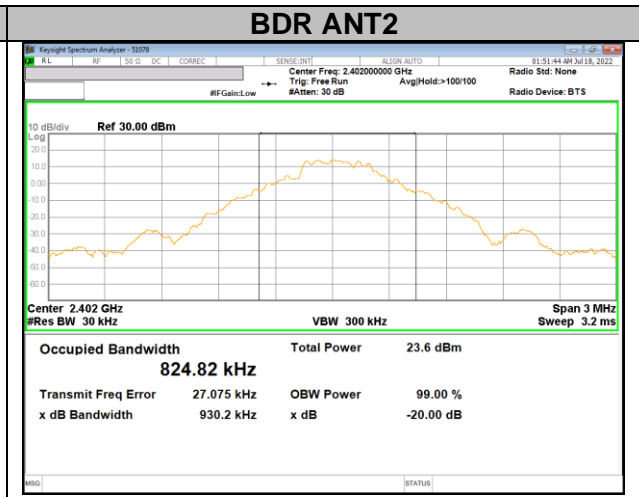


20 dB bandwidth / 0 CHANNEL

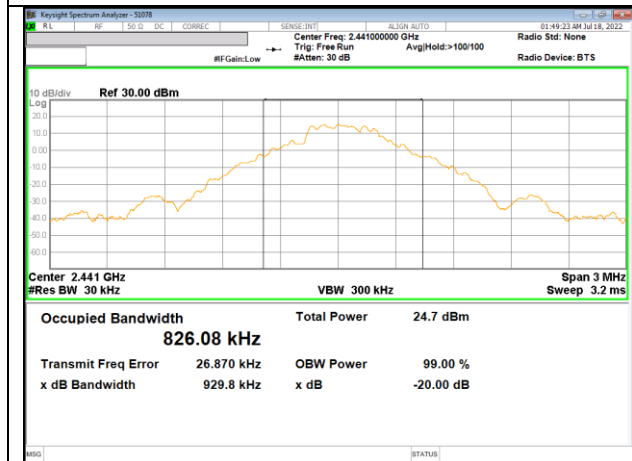


20 dB bandwidth / 39 CHANNEL

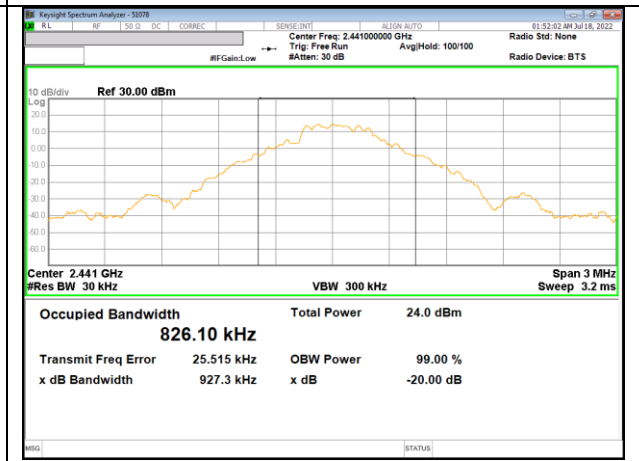


20 dB bandwidth / 39 CHANNEL

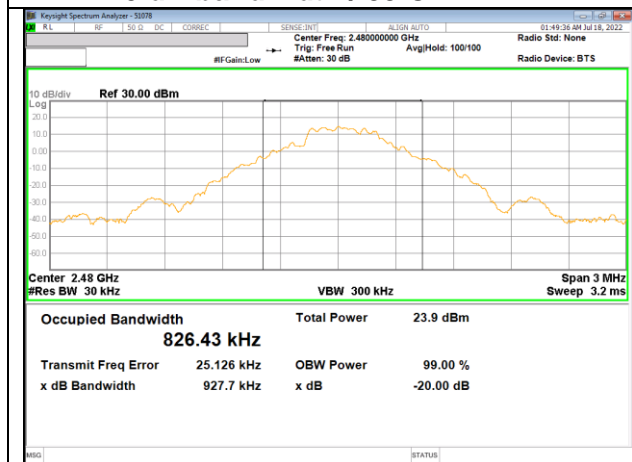


20 dB bandwidth / 78 CHANNEL

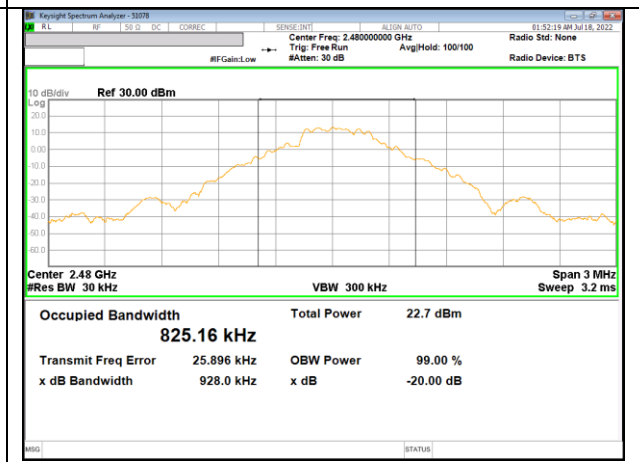


20 dB bandwidth / 78 CHANNEL

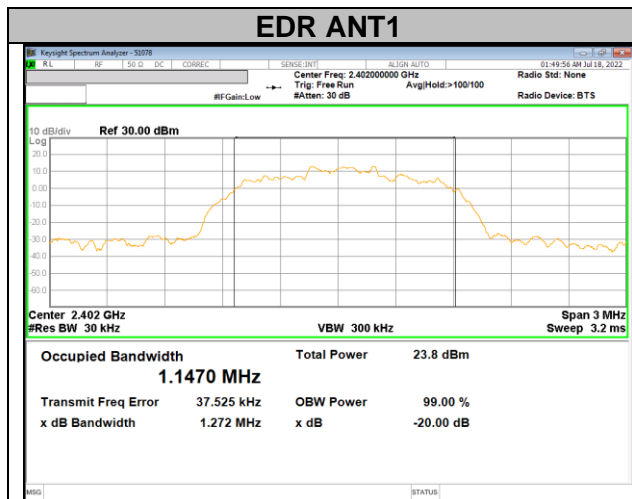


20 dB bandwidth / 0 CHANNEL

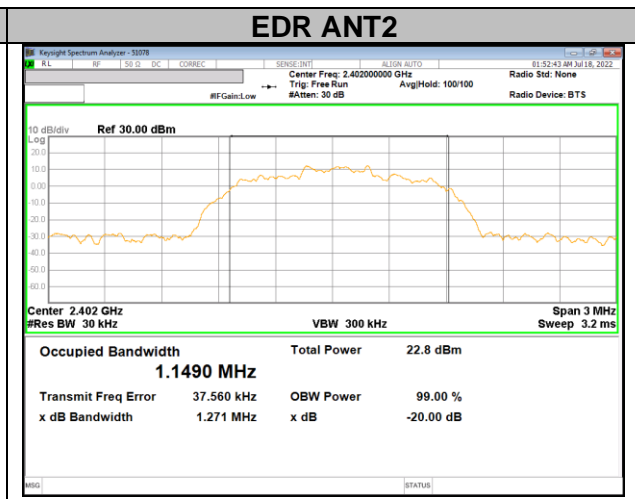


20 dB bandwidth / 0 CHANNEL

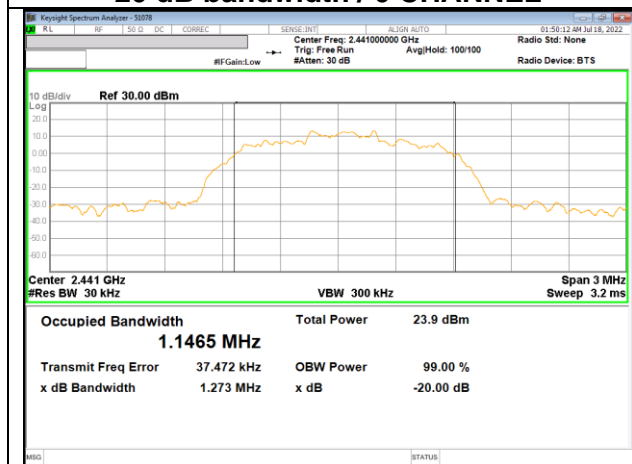


20 dB bandwidth / 39 CHANNEL

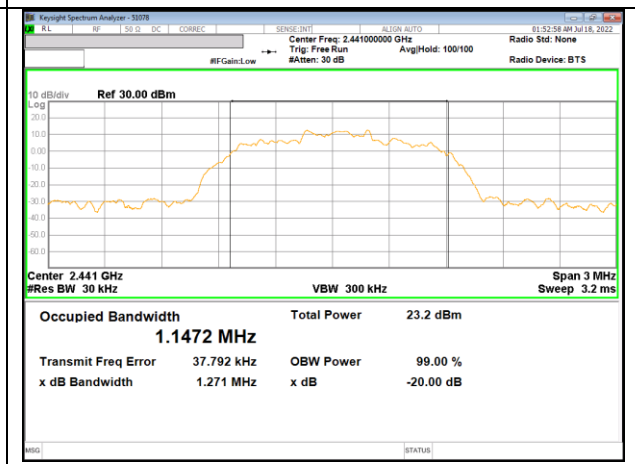

20 dB bandwidth / 39 CHANNEL

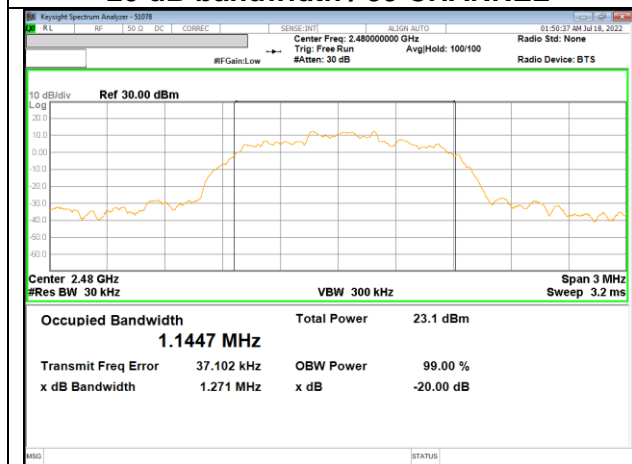

20 dB bandwidth / 78 CHANNEL

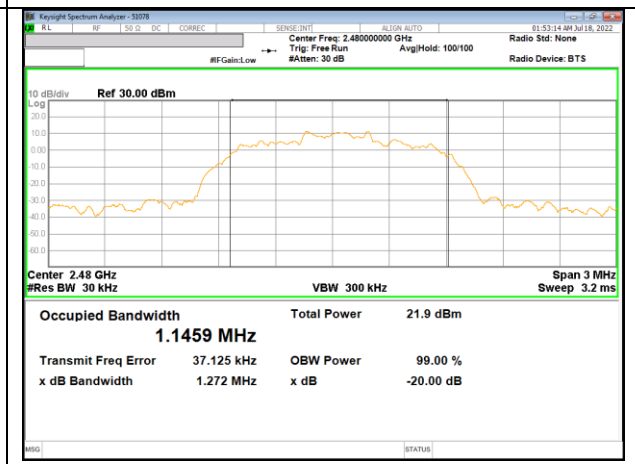

20 dB bandwidth / 78 CHANNEL

9.3. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.



Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to $VBW \geq RBW$. The sweep time is coupled.

RESULTS

9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

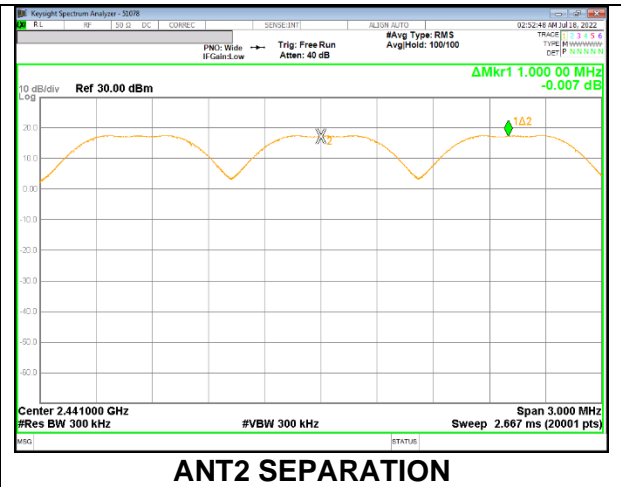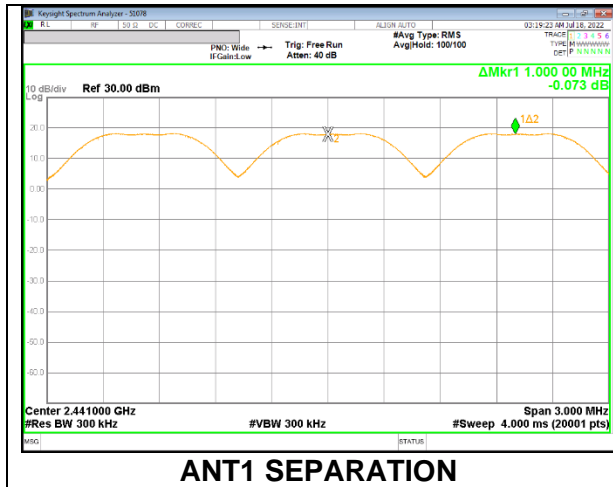

9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

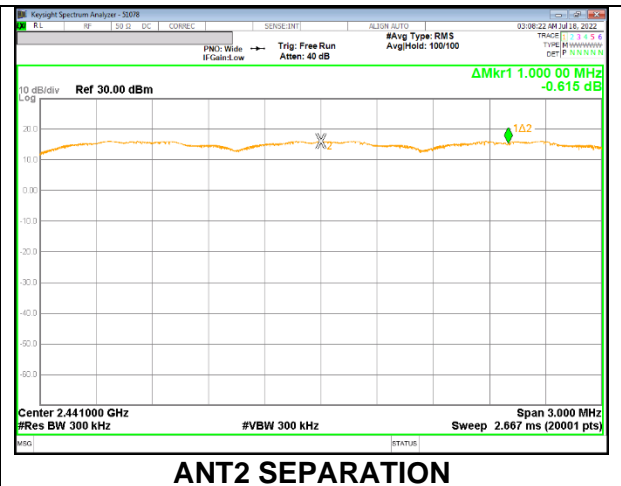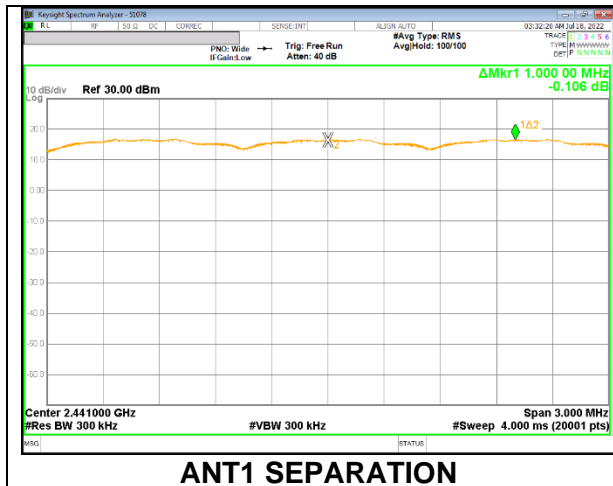

9.4. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS


Normal Mode: All Channels Observed

9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION


- ANT1

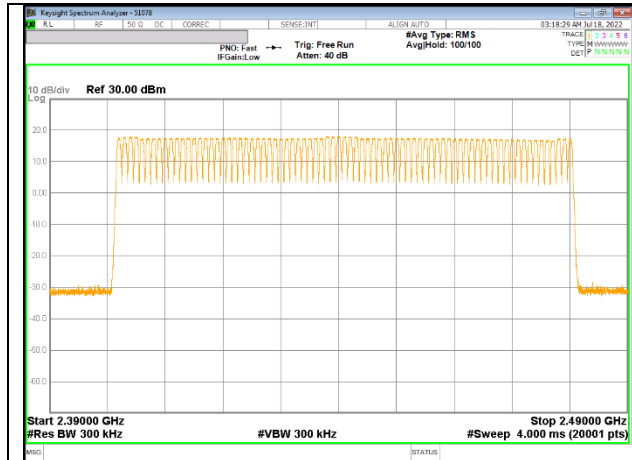


100 MHz Span

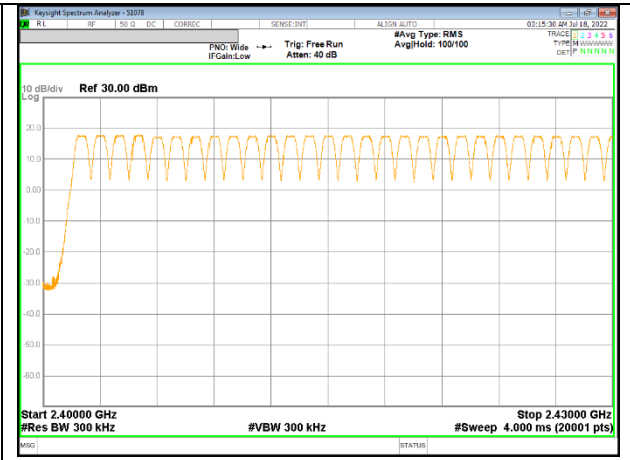

30MHz SPAN, SEGMENT 1 OF 3

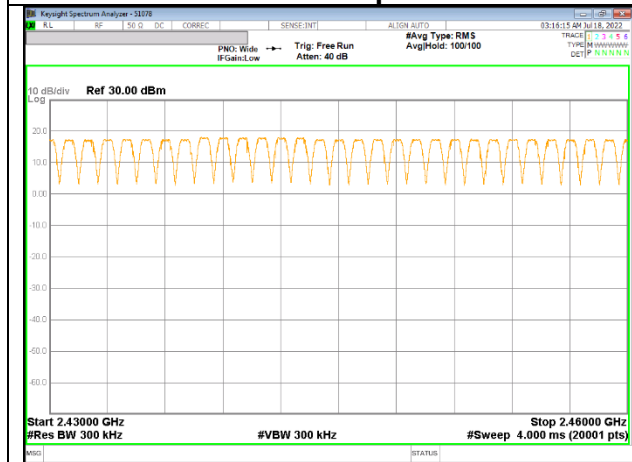


30MHz SPAN, SEGMENT 2 OF 3

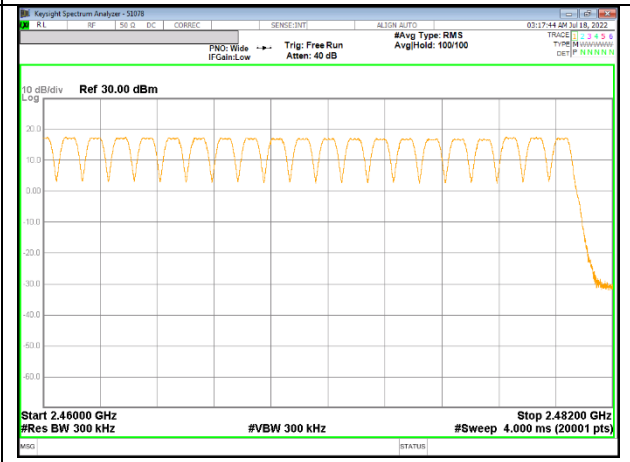


30MHz SPAN, SEGMENT 3 OF 3


- ANT2

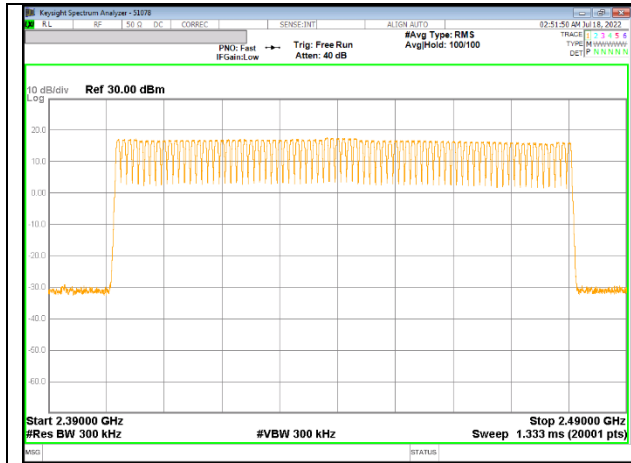


100 MHz Span

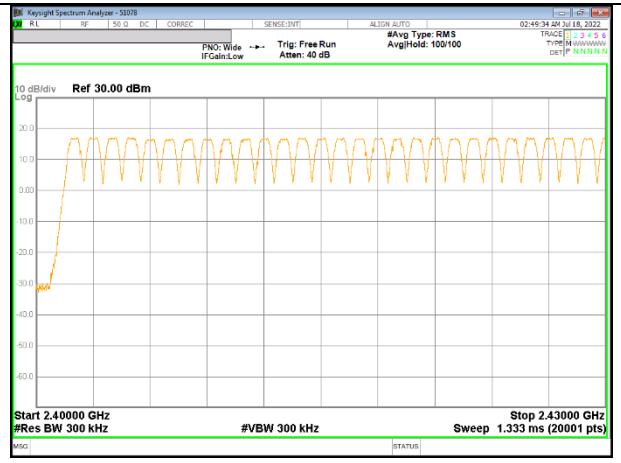

30MHz SPAN, SEGMENT 1 OF 3

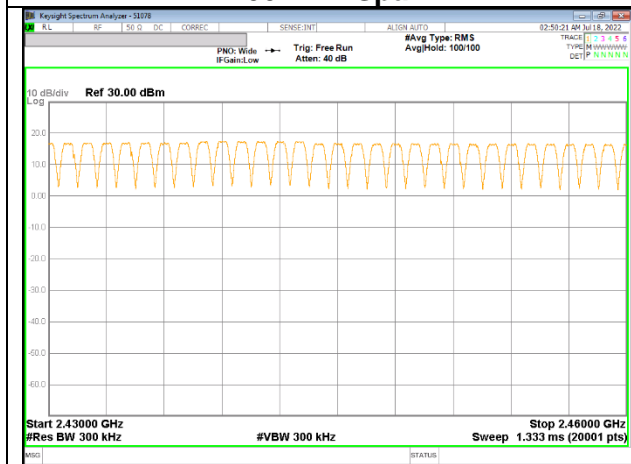


30MHz SPAN, SEGMENT 2 OF 3

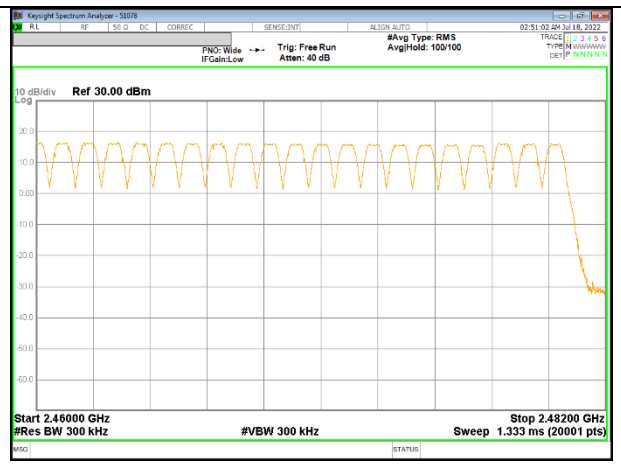


30MHz SPAN, SEGMENT 3 OF 3

9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION


- ANT1

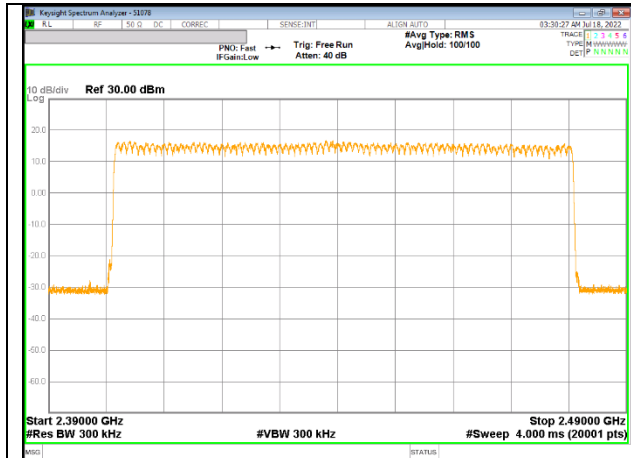


100 MHz Span

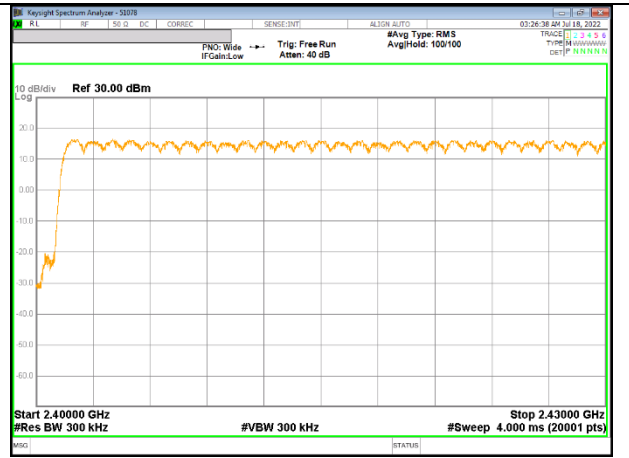

30MHz SPAN, SEGMENT 1 OF 3

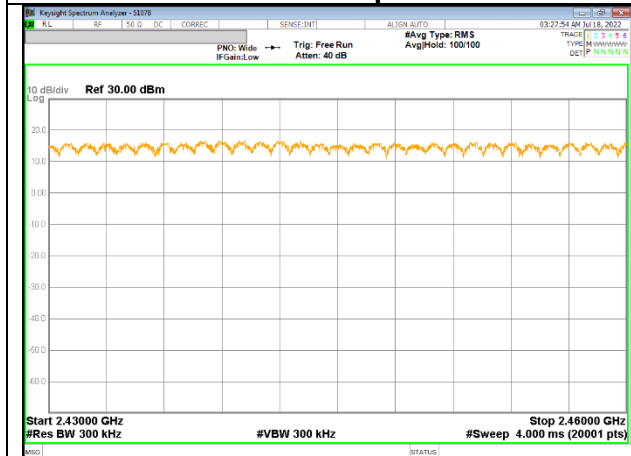


30MHz SPAN, SEGMENT 2 OF 3

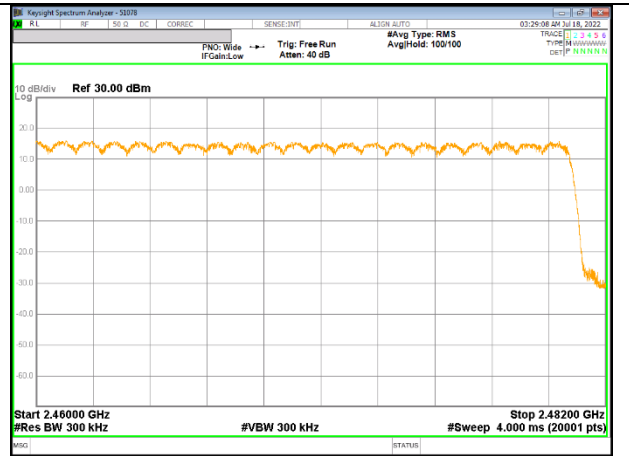


30MHz SPAN, SEGMENT 3 OF 3


- ANT2

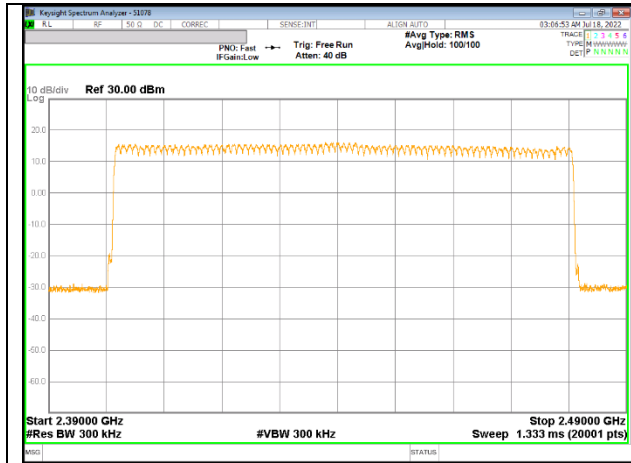


100 MHz Span

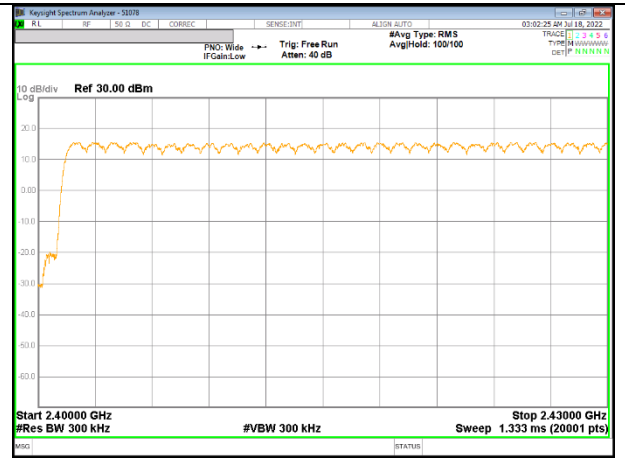

30MHz SPAN, SEGMENT 1 OF 3

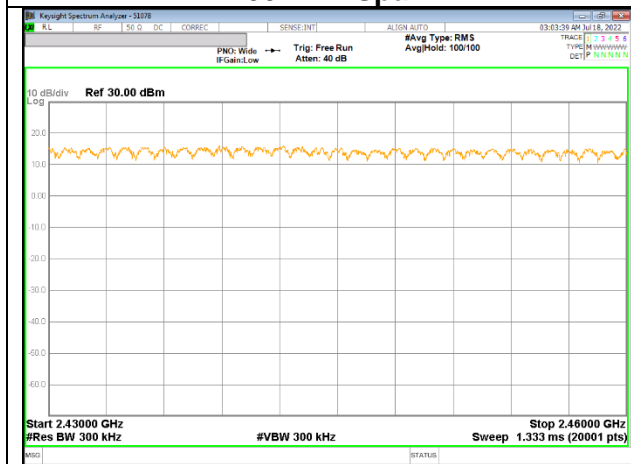

30MHz SPAN, SEGMENT 2 OF 3

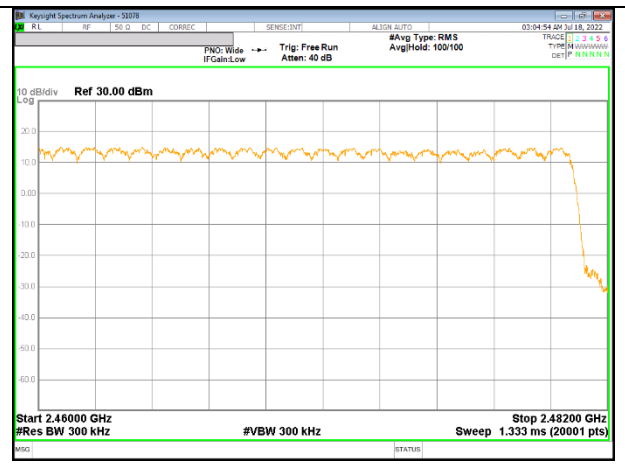

30MHz SPAN, SEGMENT 3 OF 3

9.5. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 3.16 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$.


RESULTS

9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK ANT1 Normal					
DH1	0.377	32	0.121	0.4	-0.279
DH3	1.632	15	0.245	0.4	-0.155
DH5	2.881	11	0.317	0.4	-0.083
GFSK ANT1 AFH					
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK ANT1 AFH					
DH1	0.377	8	0.030	0.4	-0.370
DH3	1.632	3.75	0.061	0.4	-0.339
DH5	2.881	2.75	0.079	0.4	-0.321

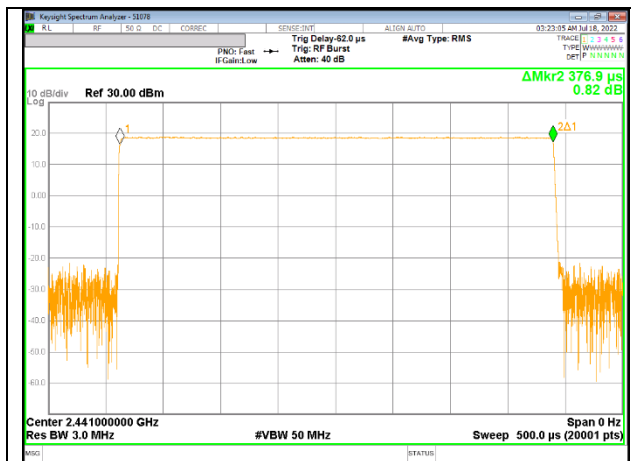


PULSE WIDTH – DH1

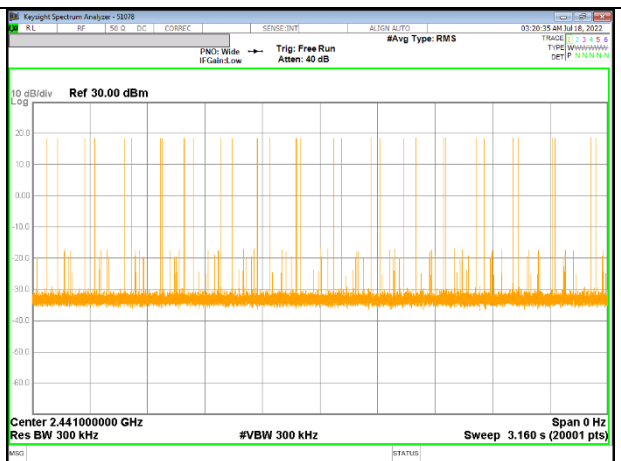


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1




PULSE WIDTH – DH3

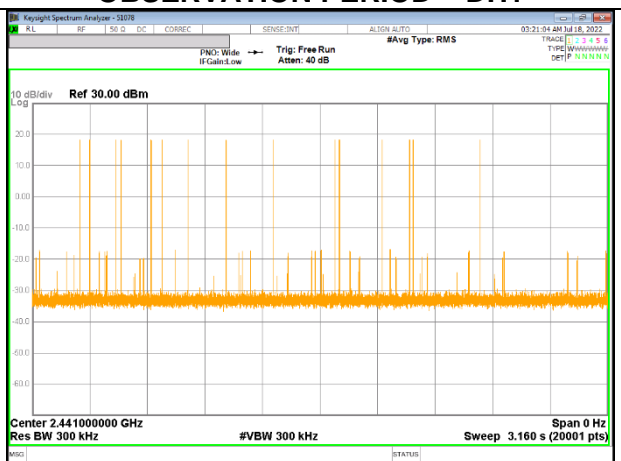

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

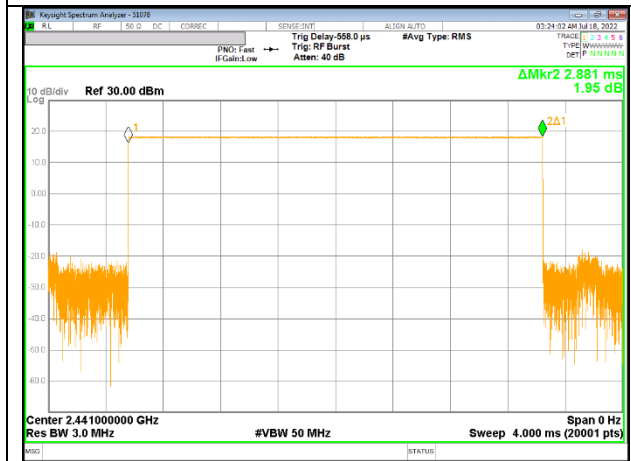

PULSE WIDTH – DH5

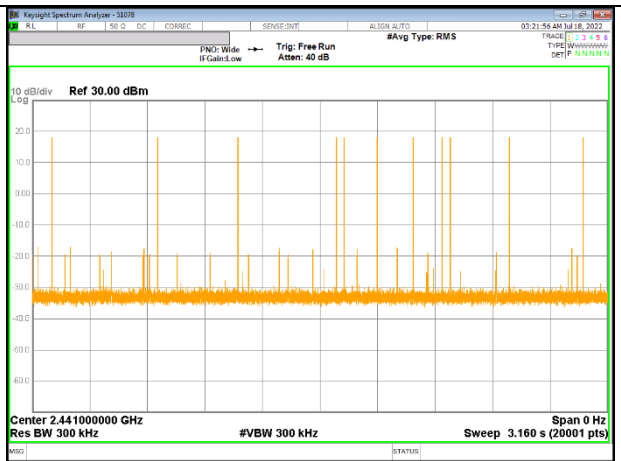

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK ANT2 Normal					
DH1	0.376	32	0.120	0.4	-0.280
DH3	1.630	16	0.261	0.4	-0.139
DH5	2.880	10	0.288	0.4	-0.112
GFSK ANT2 AFH					
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK ANT2 AFH					
DH1	0.376	8	0.030	0.4	-0.370
DH3	1.630	4	0.065	0.4	-0.335
DH5	2.880	2.5	0.072	0.4	-0.328




PULSE WIDTH – DH1




NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1



PULSE WIDTH – DH3

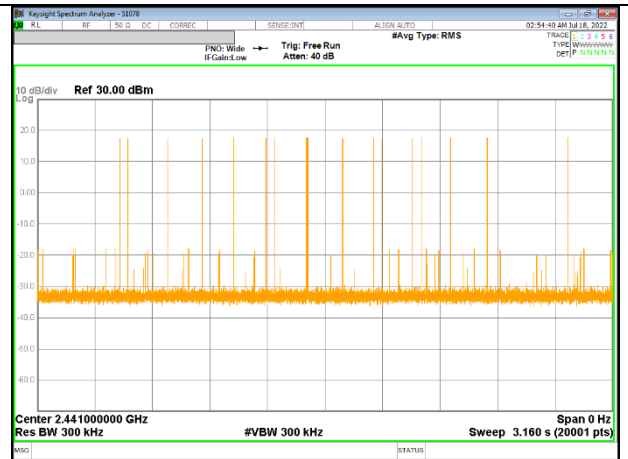

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

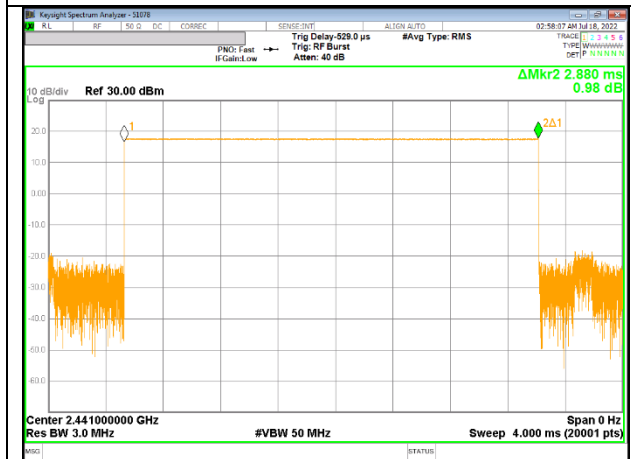


PULSE WIDTH – DH5



NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION


DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8PSK ANT1 Normal					
DH1	0.384	32	0.123	0.4	-0.277
DH3	1.634	15	0.245	0.4	-0.155
DH5	2.884	12	0.346	0.4	-0.054
8PSK ANT1 AFH					
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8PSK ANT1 AFH					
DH1	0.384	8	0.031	0.4	-0.369
DH3	1.634	3.75	0.061	0.4	-0.339
DH5	2.884	3	0.087	0.4	-0.313

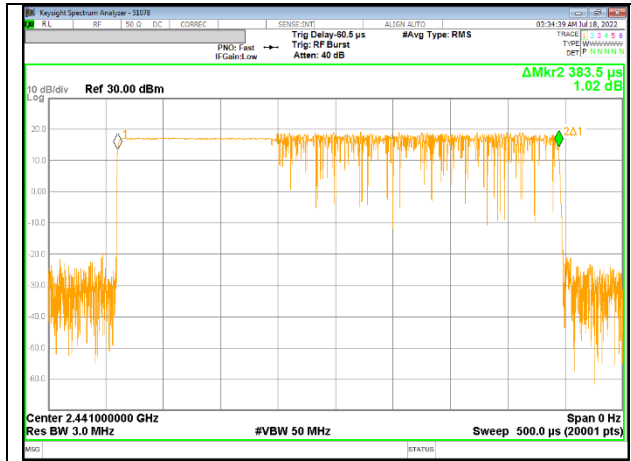

PULSE WIDTH – 3-DH1




NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3-DH1

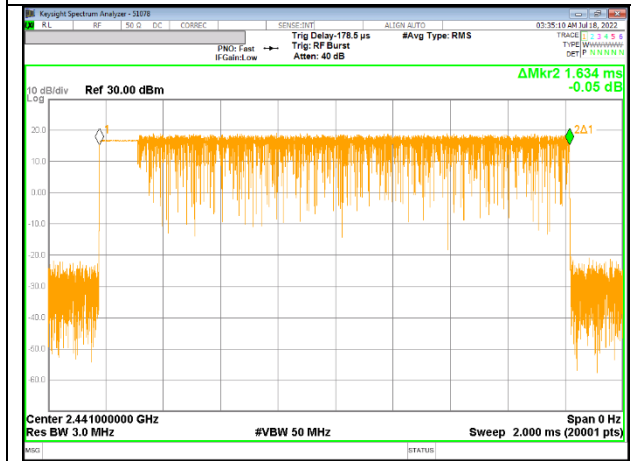

PULSE WIDTH – 3-DH3



NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3-DH3

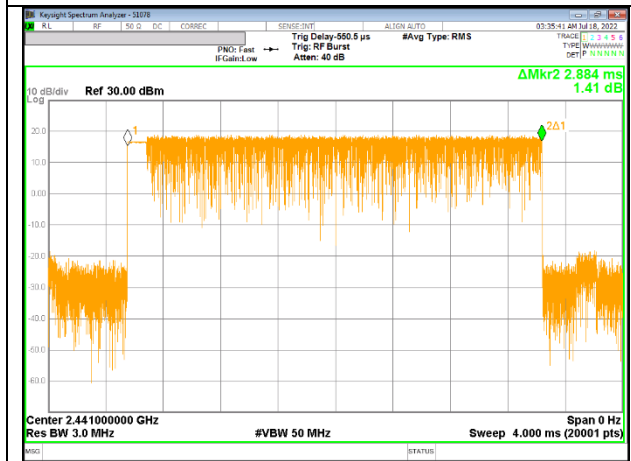


PULSE WIDTH – 3-DH5



NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3-DH5

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8PSK ANT2 Normal					
DH1	0.383	32	0.123	0.4	-0.277
DH3	1.634	16	0.261	0.4	-0.139
DH5	2.884	11	0.317	0.4	-0.083
8PSK ANT2 AFH					
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
DH1	0.383	8	0.031	0.4	-0.369
DH3	1.634	4	0.065	0.4	-0.335
DH5	2.884	2.75	0.079	0.4	-0.321

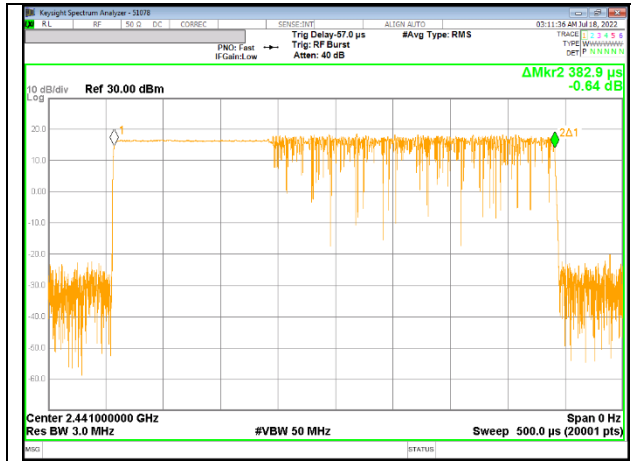

PULSE WIDTH – 3-DH1




**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – 3-DH1**



PULSE WIDTH – 3-DH3



**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – 3-DH3**

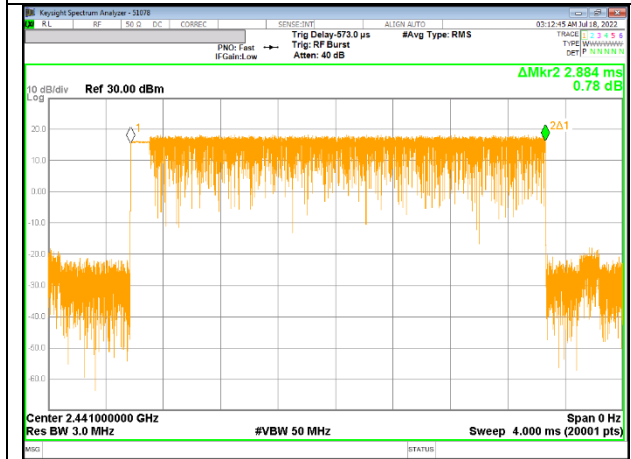

PULSE WIDTH – 3-DH5



**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – 3-DH5**

9.6. OUTPUT POWER

LIMITS

§15.247 (b) (1)

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

9.6.1. BASIC DATA RATE GFSK MODULATION

Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
ANT1	0	2 402	18.395	21.000	-2.605
	39	2 441	18.782		-2.218
	78	2 480	17.553		-3.447
ANT2	0	2 402	17.877		-3.123
	39	2 441	18.469		-2.531
	78	2 480	16.754		-4.246
Worst			18.782		-2.218

9.6.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION


Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
ANT1	0	2 402	18.451	21.000	-2.549
	39	2 441	18.827		-2.173
	78	2 480	17.571		-3.429
ANT2	0	2 402	17.962		-3.038
	39	2 441	18.499		-2.501
	78	2 480	16.785		-4.215
Worst			18.827		-2.173



9.6.3. ENHANCED DATA RATE 8PSK MODULATION

Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
ANT1	0	2 402	18.865	21.000	-2.135
	39	2 441	19.240		-1.760
	78	2 480	18.016		-2.984
ANT2	0	2 402	18.261		-2.739
	39	2 441	18.966		-2.034
	78	2 480	17.273		-3.727
Worst			19.240		-1.760

9.6.4. OUTPUT POWER PLOTS



PEAK OUTPUT POWER

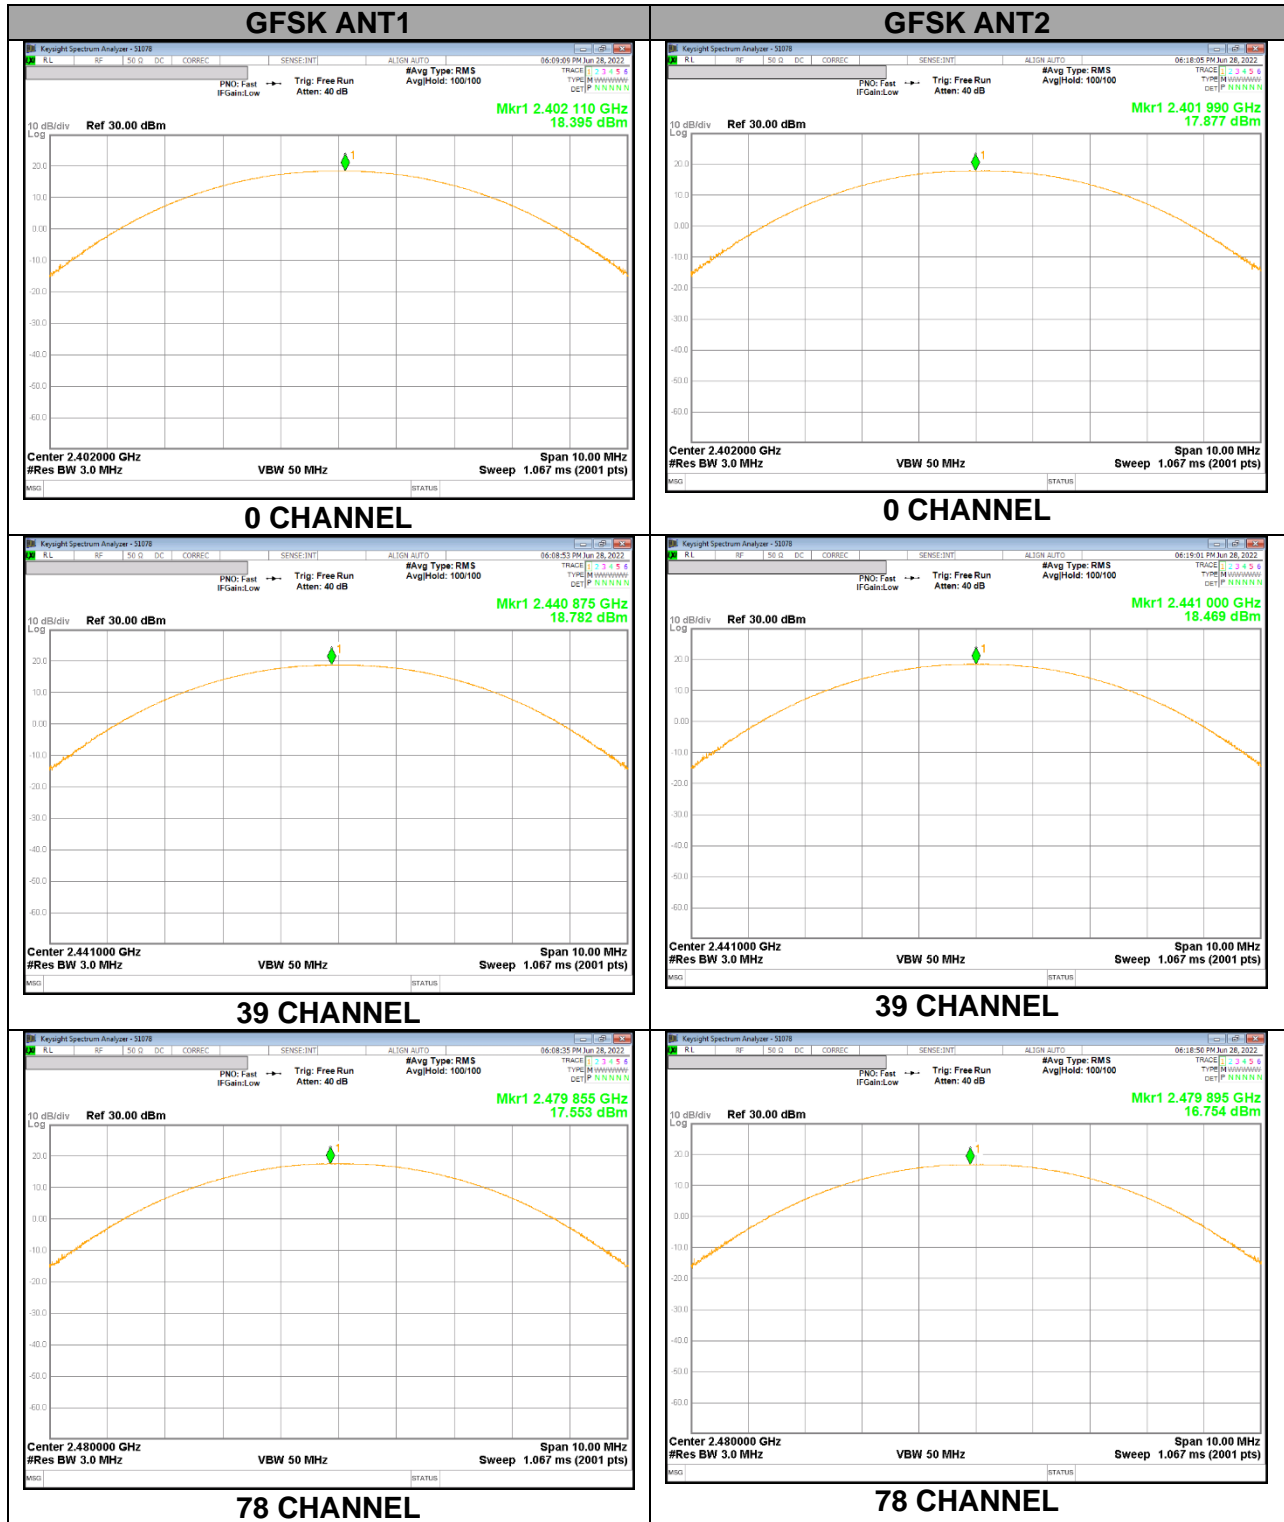

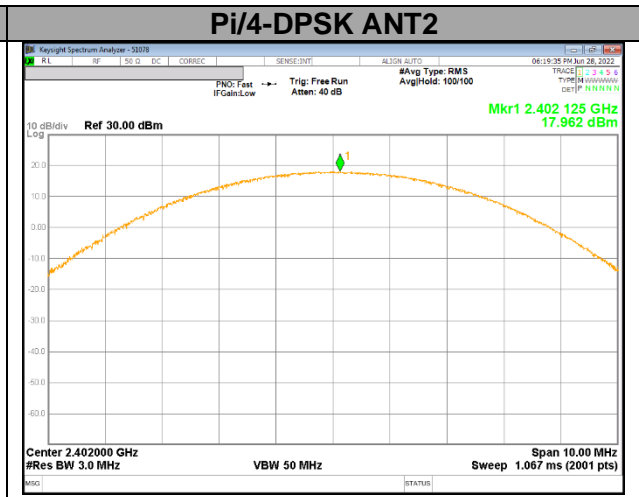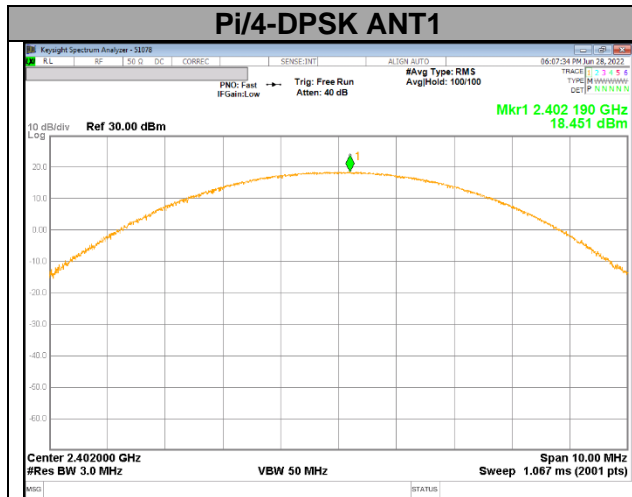



0 CHANNEL

0 CHANNEL

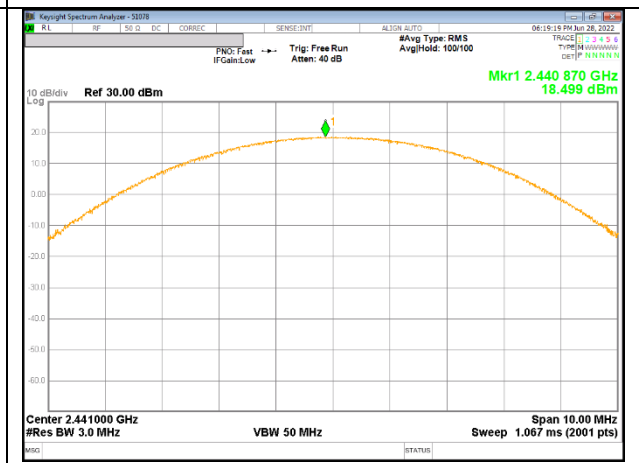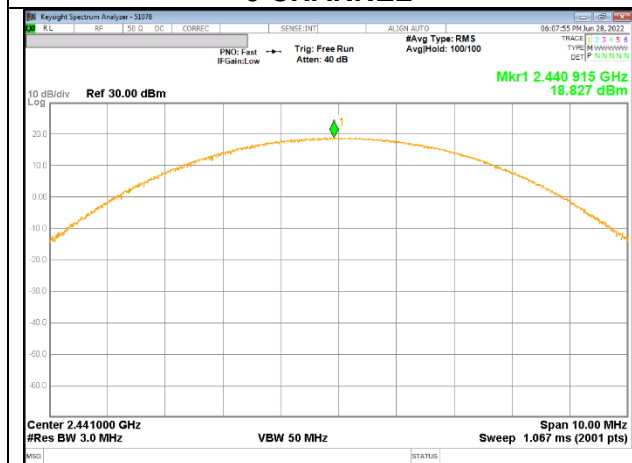


39 CHANNEL

39 CHANNEL

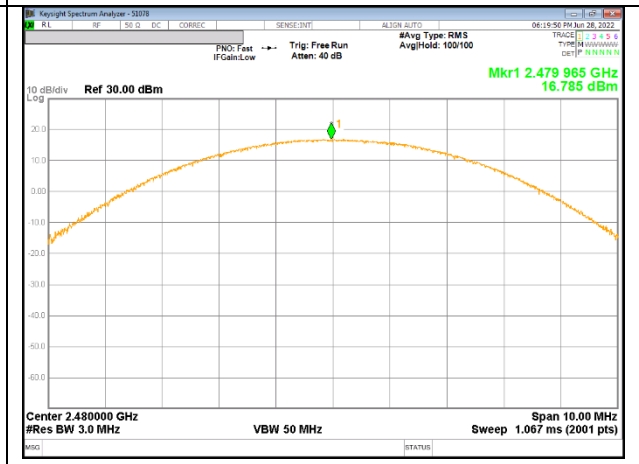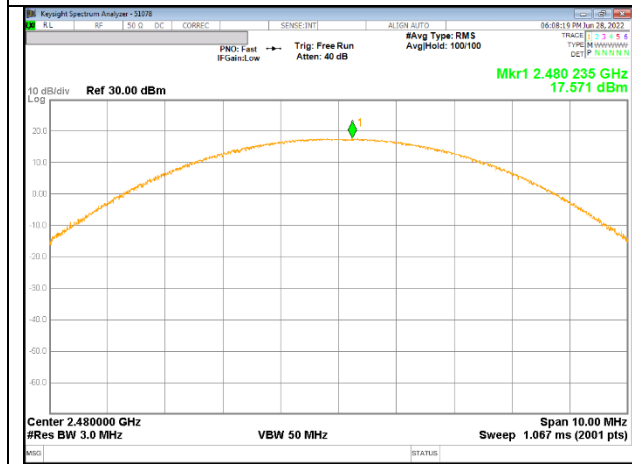

78 CHANNEL

78 CHANNEL

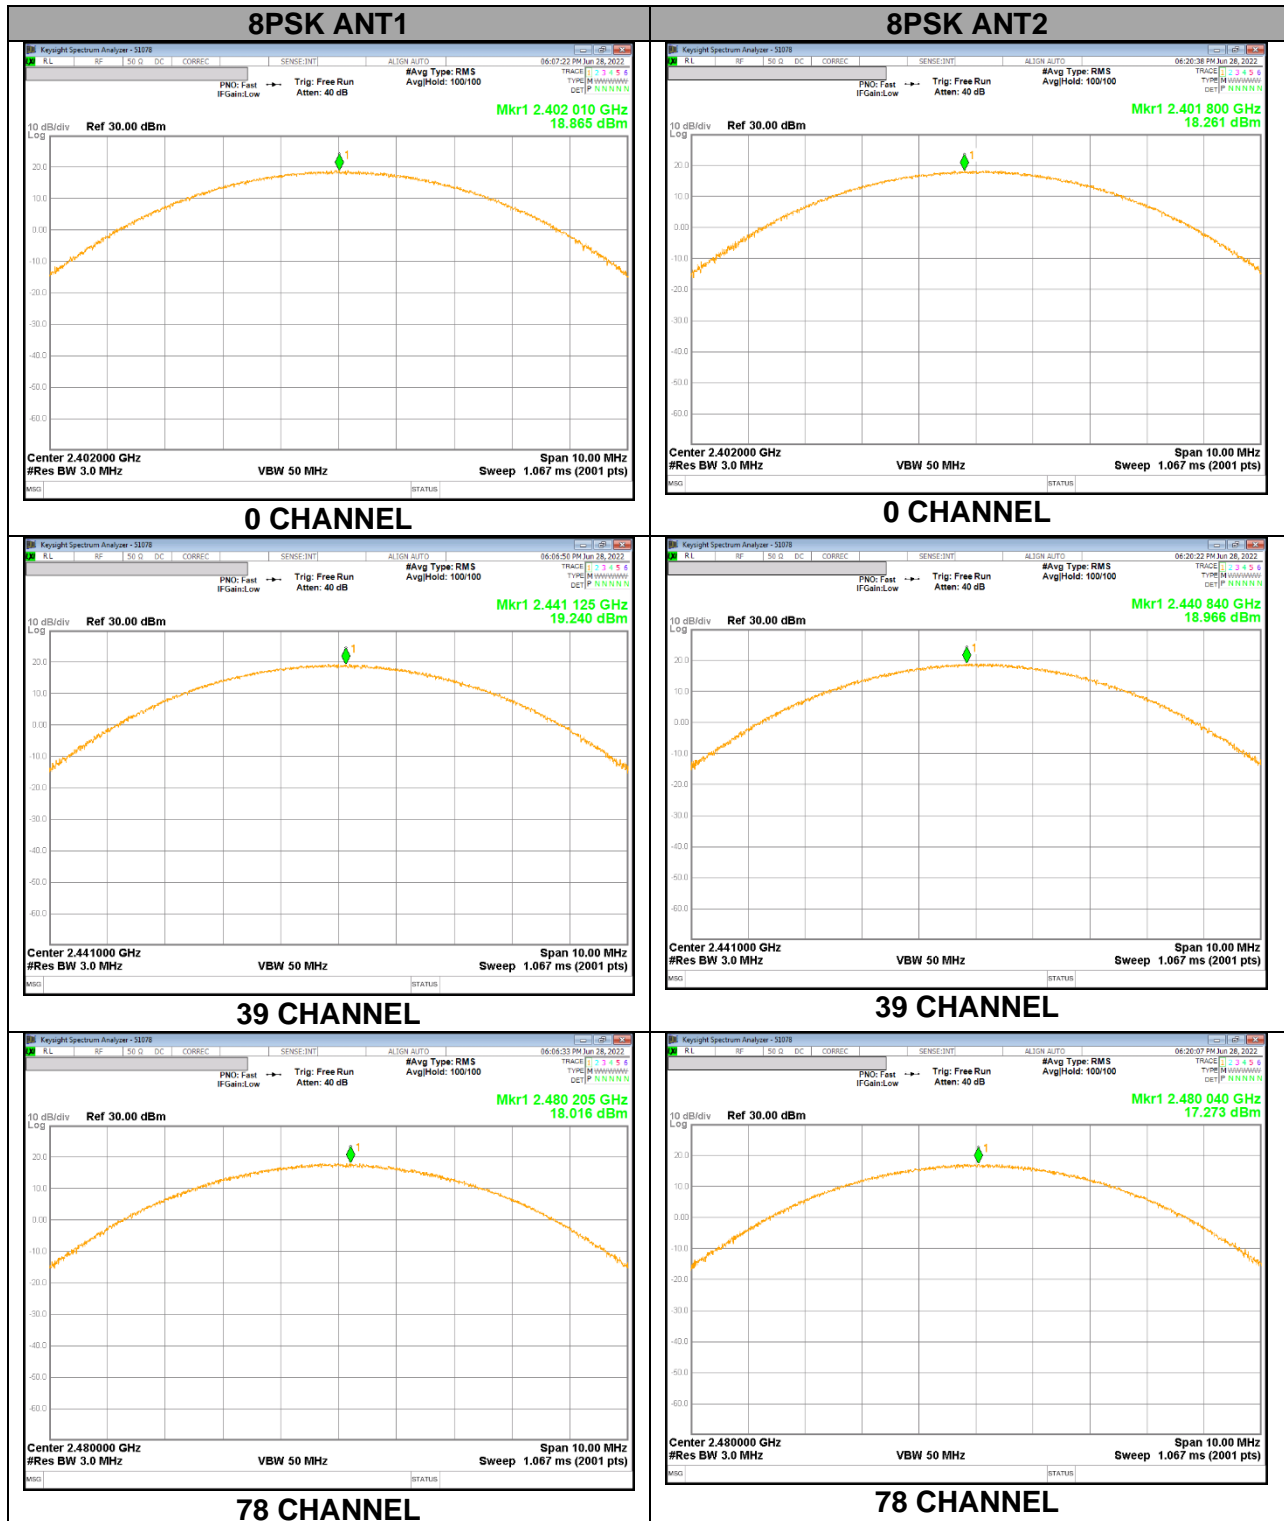

9.7. AVERAGE POWER

LIMITS

None; for reporting purposes only

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.
 The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

9.7.1. BASIC DATA RATE GFSK MODULATION

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
ANT1	0	2 402	17.942	62.259
	39	2 441	18.314	67.827
	78	2 480	17.132	51.665
ANT2	0	2 402	17.615	57.743
	39	2 441	18.195	65.993
	78	2 480	16.462	44.279

9.7.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
ANT1	0	2 402	15.970	39.537
	39	2 441	16.353	43.182
	78	2 480	15.125	32.546
ANT2	0	2 402	15.716	37.291
	39	2 441	16.240	42.073
	78	2 480	14.422	27.682

9.7.3. ENHANCED DATA RATE 8PSK MODULATION

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
ANT1	0	2 402	15.983	39.655
	39	2 441	16.365	43.301
	78	2 480	15.149	32.727
ANT2	0	2 402	15.705	37.196
	39	2 441	16.254	42.209
	78	2 480	14.439	27.791

9.8. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The band-edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS

9.8.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION


SPURIOUS EMISSIONS, NON-HOPPING - ANT1

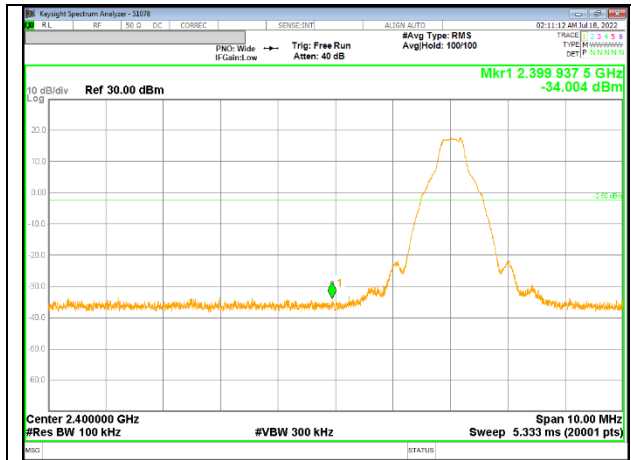


0 CHANNEL BANDEGE

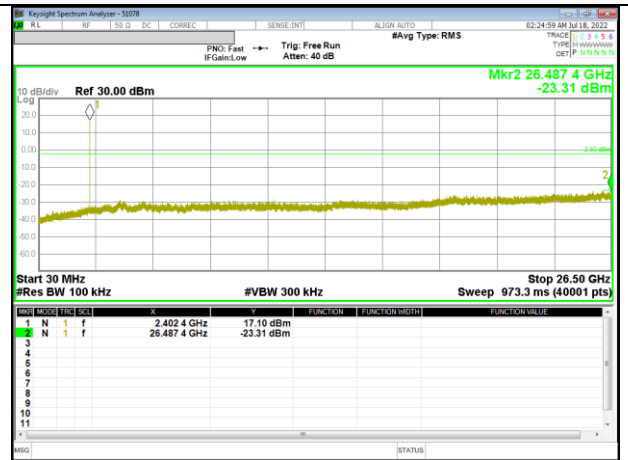


OUT-OF-BAND 0 CHANNEL

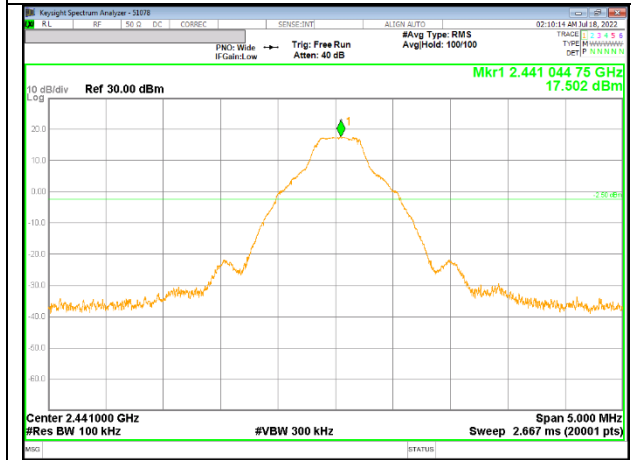


IN-BAND REFERENCE LEVEL

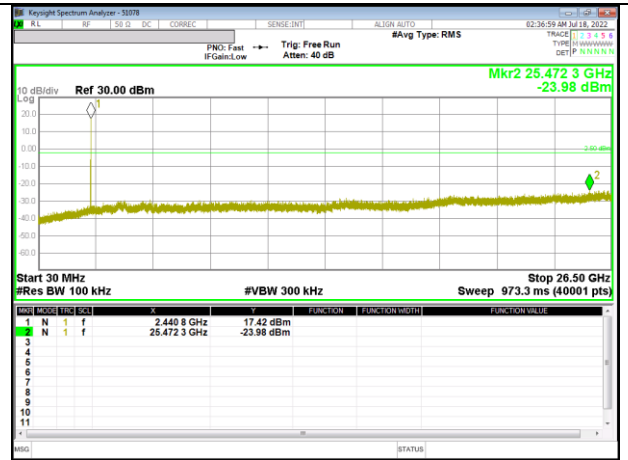

OUT-OF-BAND 39 CHANNEL

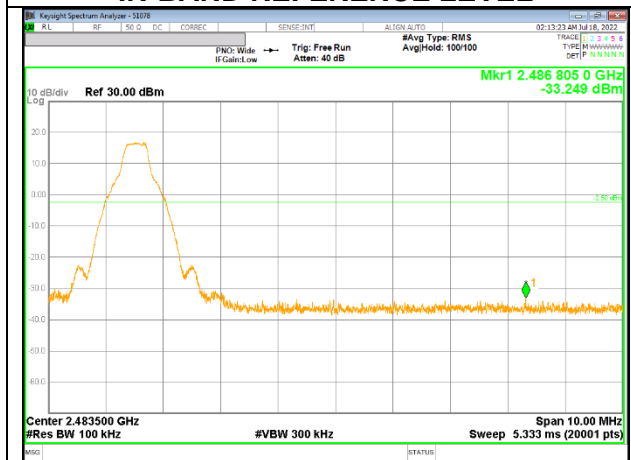

78 CHANNEL BANDEGE

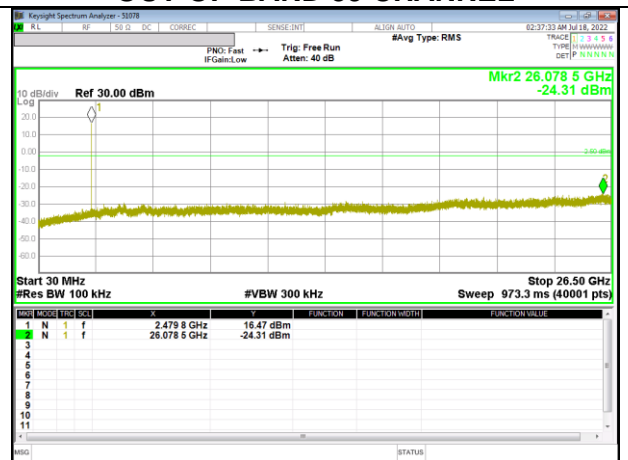


OUT-OF-BAND 78 CHANNEL


SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON




SPURIOUS EMISSIONS, NON-HOPPING - ANT2

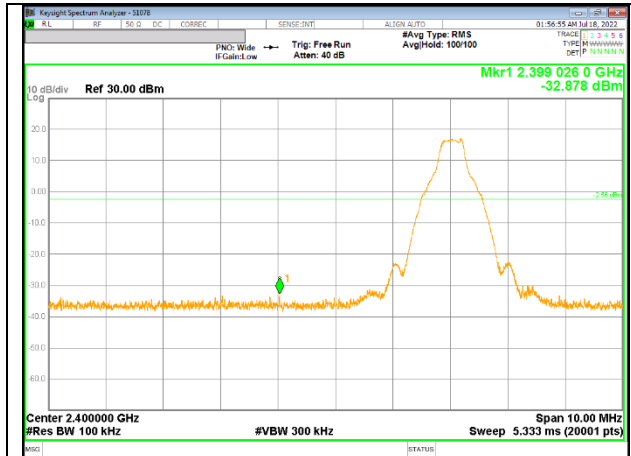


0 CHANNEL BANDEDGE

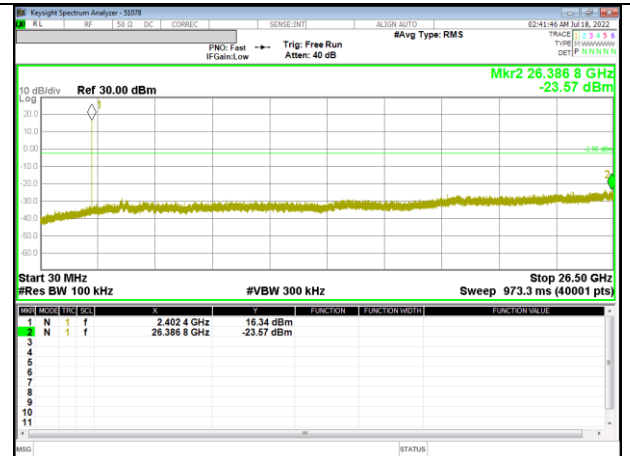


OUT-OF-BAND 0 CHANNEL

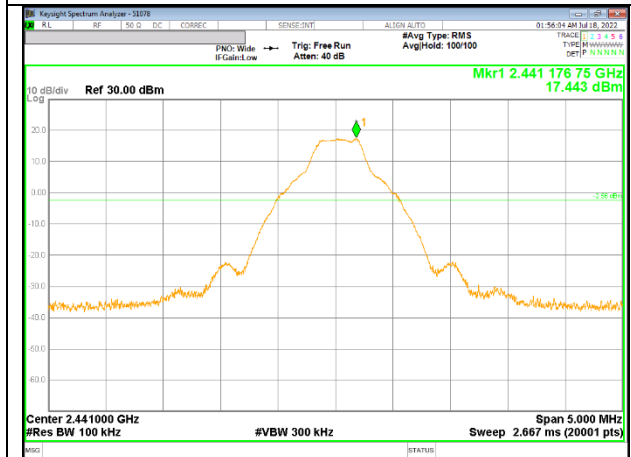


IN-BAND REFERENCE LEVEL

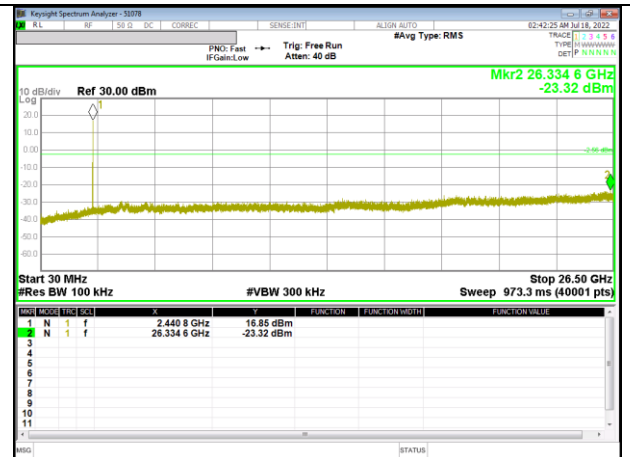

OUT-OF-BAND 39 CHANNEL

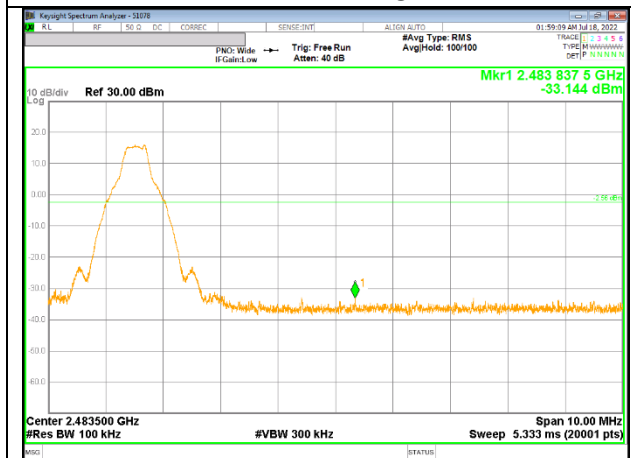

78 CHANNEL BANDEDGE

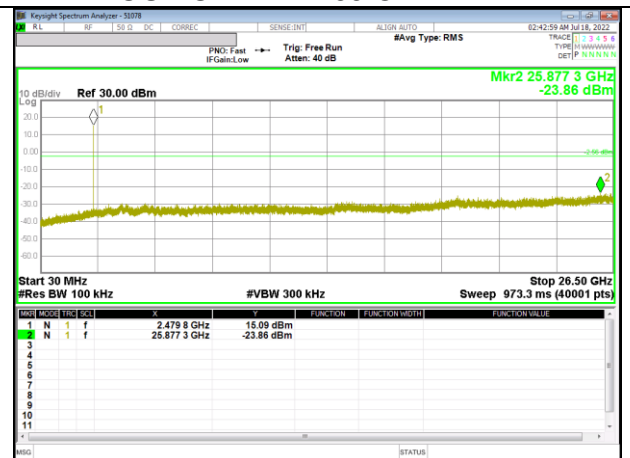


OUT-OF-BAND 78 CHANNEL

SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON




9.8.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION


SPURIOUS EMISSIONS, NON-HOPPING - ANT1

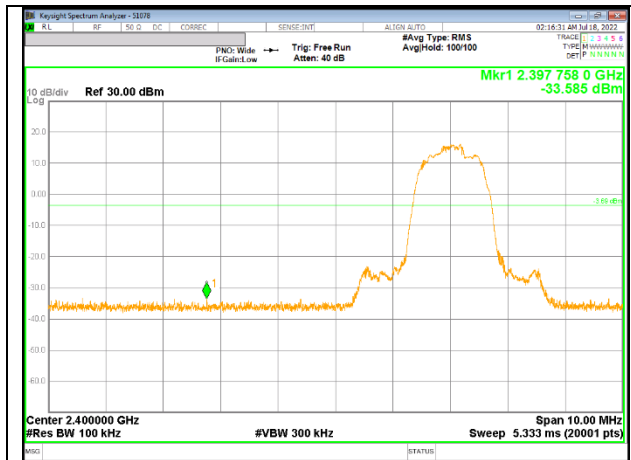


0 CHANNEL BANDEGE

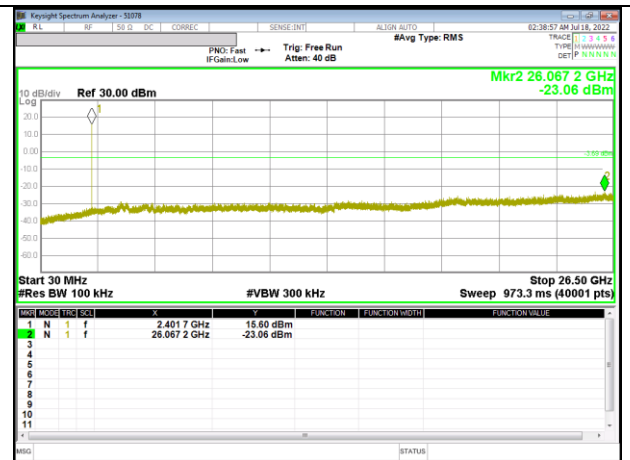


OUT-OF-BAND 0 CHANNEL

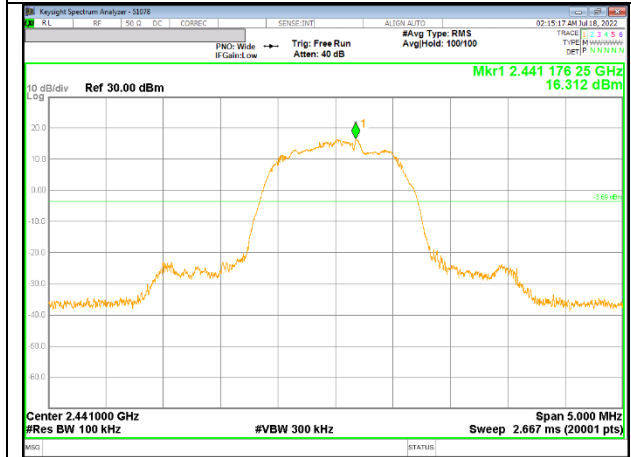


IN-BAND REFERENCE LEVEL

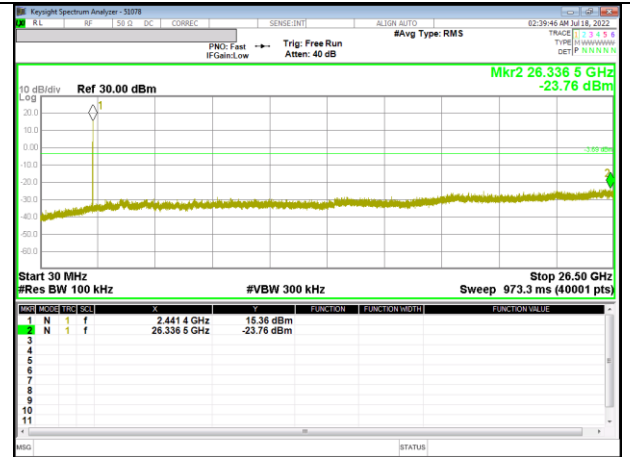

OUT-OF-BAND 39 CHANNEL

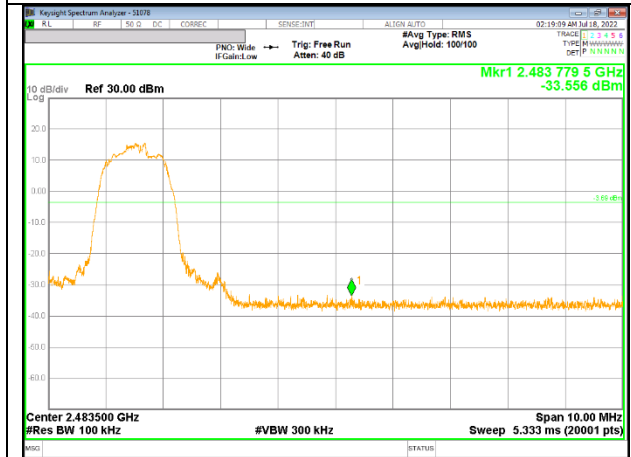

78 CHANNEL BANDEGE

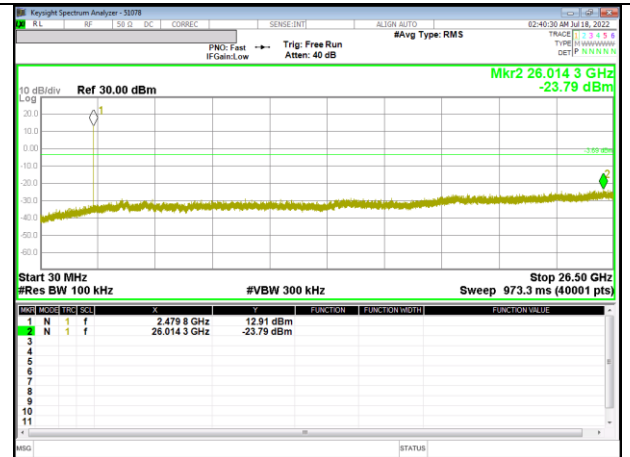


OUT-OF-BAND 78 CHANNEL


SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON




SPURIOUS EMISSIONS, NON-HOPPING - ANT2

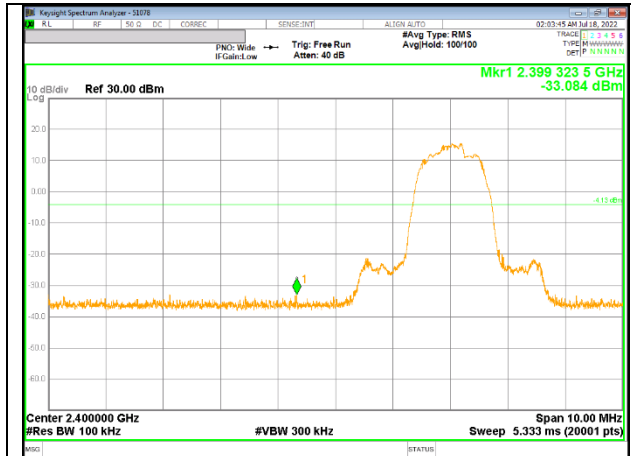


0 CHANNEL BANDEDGE

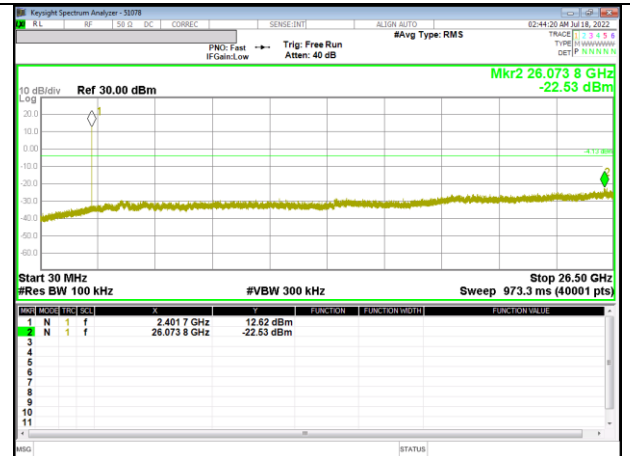


OUT-OF-BAND 0 CHANNEL

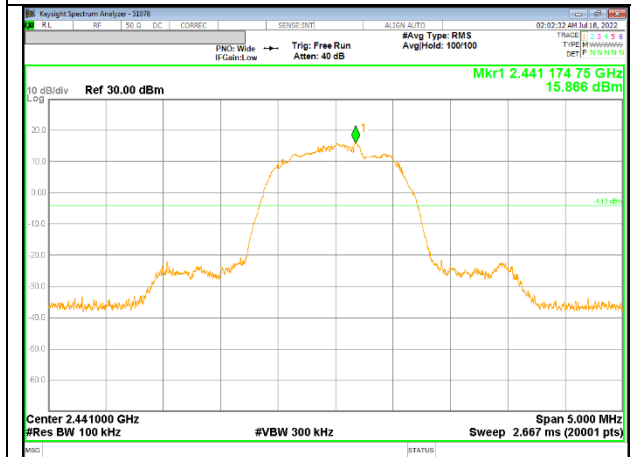


IN-BAND REFERENCE LEVEL

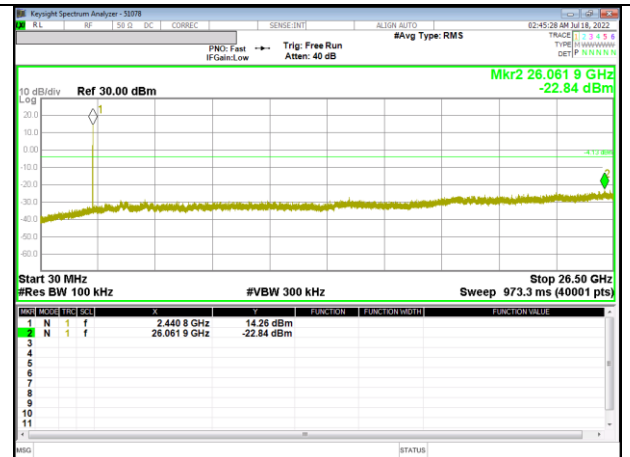

OUT-OF-BAND 39 CHANNEL

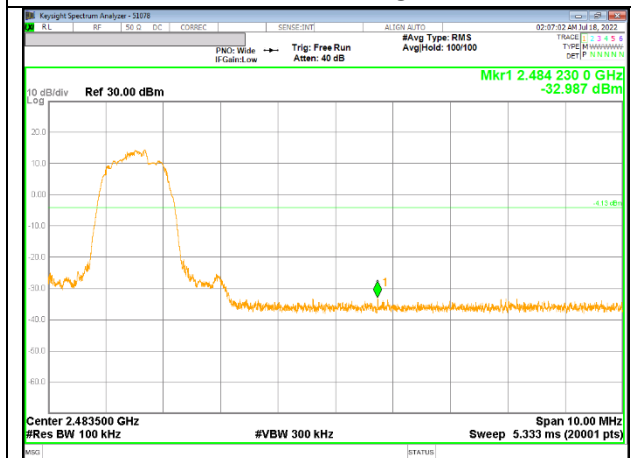

78 CHANNEL BANDEDGE

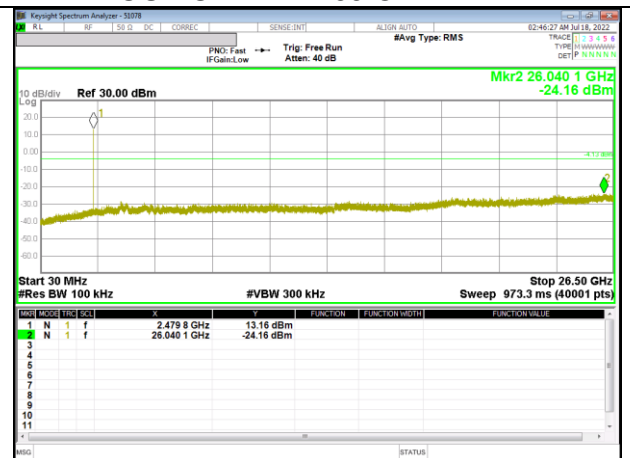

OUT-OF-BAND 78 CHANNEL

SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON

