



CERTIFICATION TEST REPORT

Report Number. : 4790406775-E1V2

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-T630

FCC ID : A3LSMT630

EUT Description : BT/BLE, DTS/UNII a/b/g/n/ac/ax and NFC.

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

2022-08-03

Prepared by:

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, LTD. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu

Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2022-07-26	Initial issue	SunGeun Lee
V2	2022-08-03	Updated to address TCB's question	SunGeun Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
1.1. INTRODUCTION OF TEST DATA DEVIATION	6
1.2. DIFFERENCE	6
1.3. SPOT CHECK VERIFICATION DATA	6
1.4. REFERENCE DETAIL	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. SAMPLE CALCULATION	8
4.3. MEASUREMENT UNCERTAINTY	8
4.4. DECISION RULE	8
5. EQUIPMENT UNDER TEST	9
5.1. EUT DESCRIPTION	9
5.2. MAXIMUM OUTPUT POWER	10
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	10
5.4. TESTED CHANNELS LIST	10
5.5. WORST-CASE CONFIGURATION AND MODE	11
5.6. DESCRIPTION OF TEST SETUP	13
6. MEASUREMENT METHOD	15
7. TEST AND MEASUREMENT EQUIPMENT	16
8. SUMMARY TABLE	17
9. ANTENNA PORT TEST RESULTS	18
9.1. ON TIME AND DUTY CYCLE	18
9.2. 6 dB BANDWIDTH	21
9.2.1. 802.11b SISO MODE IN THE 2.4 GHz BAND	22
9.2.2. 802.11g MIMO MODE IN THE 2.4 GHz BAND	22
9.2.3. 802.11n HT20 MIMO MODE IN THE 2.4 GHz BAND	22
9.2.4. 802.11ax HE20 MIMO MODE IN THE 2.4 GHz BAND	22
9.3. OUTPUT POWER	23
9.3.1. TEST RESULTS	24
9.4. POWER SPECTRAL DENSITY	26

9.4.1.	802.11b/g/n HT20 MODE TEST RESULTS.....	27
9.5.	CONDUCTED SPURIOUS EMISSIONS.....	28
9.5.1.	802.11b MODE	29
9.5.2.	802.11g MODE	33
9.5.3.	802.11n HT20 MODE	37
9.5.4.	802.11ax HE20(SU) MODE	41
9.5.5.	802.11ax HE20(RU) MODE	45
10.	RADIATED TEST RESULTS.....	51
10.1.	TRANSMITTER ABOVE 1 GHz.....	53
10.1.1.	TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND	53
10.1.2.	TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND	59
10.1.3.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND.....	63
10.1.4.	TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 2.4 GHz BAND.....	67
10.2.	WORST CASE BELOW 1 GHZ.....	73
11.	AC POWER LINE CONDUCTED EMISSIONS.....	74
11.1.1.	AC Power Line (C to A).....	75
11.1.2.	AC Power Line (C to C)	77
12.	SPOT-CHECK TEST RESULT	79

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: BT/BLE, DTS/UNII a/b/g/n/ac/ax and NFC
MODEL NUMBER: SM-T630
SERIAL NUMBER: R32T50052FD, (CONDUCTED, Original);
R32T5002ZQH, R32T5003G0W (RADIATED, Original);
R32T6005G6X (RADIATED, Spot-check);
DATE TESTED: 2022-06-06 ~ 2022-07-26 (Original);
2022-07-06 ~ 2022-07-21 (Spot-check);

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:

Tested By:



Seokhwan Hong
Suwon Lab Engineer
UL Korea, Ltd.

Sungeun Lee
Suwon Lab Engineer
UL Korea, Ltd.

1.1. INTRODUCTION OF TEST DATA DEVIATION

This report referenced from the FCC ID: A3LSMT636B DTS WLAN(FCC CFR 47 Part 15C). And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

1.2. DIFFERENCE

Except for removing WWAN RF components, The SM-T630 model shares the same enclosure and circuit board as SM-T636B. The WLAN antennas and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary radiated emissions that the performance of the SM-T630 remains representative of SM-T636B. The test data of SM-T636B being submitted for this application to cover WLAN features.

1.3. SPOT CHECK VERIFICATION DATA

(Worst case of the radiated band-edge and radiated spurious emissions)

Band	Test Item	Mode	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
					SM-T636B Results	SM-T630 Results		
					FCC ID : A3LSMT636B	FCC ID : A3LSMT630		
DTS WLAN (2.4GHz)	BANDEDGE	802.11b_2462_ANT1	2462 MHz	54 dBuV/m	45.91 dBuV/m	45.93 dBuV/m	0.02 dB	
	RSE	802.11b_2437_ANT2	9755_NF	54 dBuV/m	48.82 dBuV/m	48.95 dBuV/m	0.13 dB	Noise floor
	BANDEDGE	802.11g_2412_MIMO	2412 MHz	54 dBuV/m	51.46 dBuV/m	51.08 dBuV/m	-0.38 dB	
	RSE	802.11g_2457_MIMO	9832_NF	54 dBuV/m	48.78 dBuV/m	47.90 dBuV/m	-0.88 dB	Noise floor
	BANDEDGE	802.11n_HT20_2462_MIMO	2483 MHz	54 dBuV/m	51.93 dBuV/m	47.07 dBuV/m	-4.86 dB	
	RSE	802.11n_HT20_2437_MIMO	9744_NF	54 dBuV/m	48.77 dBuV/m	48.35 dBuV/m	-0.42 dB	Noise floor
DTS WLAN_ax (2.4GHz)	BANDEDGE	802.11ax_HE20_2457_SU_MIMO	2457 MHz	54 dBuV/m	51.88 dBuV/m	51.60 dBuV/m	-0.28 dB	
	RSE	802.11ax_HE20_2437_26T_RU0_MIMO	9743_NF	54 dBuV/m	49.02 dBuV/m	48.49 dBuV/m	-0.53 dB	Noise floor

Comparison of two models, upper deviation is within 3 dB range and all test results are under FCC Technical Limits.

1.4. REFERENCE DETAIL

Reference application that contains the reused reference data in the individual test reports:

Equipment Class	Reference FCC ID (Parent)	Application Type	Reference Test report number	Exhibit Type	Spot-Check Test Report Number
DTS	A3LSMT636B	Original Grant	4790406759-E3 (802.11b/g/n/ax)	Test Report	4790406775-E1 (802.11b/g/n/ax)
DTS	A3LSMT636B	Original Grant	4790406759-E4 (BLE)	Test Report	4790406775-E2 (BLE)
DSS	A3LSMT636B	Original Grant	4790406759-E5 (Bluetooth)	Test Report	4790406775-E3 (Bluetooth)
NII	A3LSMT636B	Original Grant	4790406759-E6 (802.11a/n/ac/ax)	Test Report	4790406775-E4 (802.11a/n/ac/ax)
DXX	A3LSMT636B	Original Grant	4790406759-E7 (NFC)	Test Report	4790406775-E5 (NFC)

2. TEST METHODOLOGY

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 DTS Meas Guidance v05r02.
4. KDB 662911 D01 Multiple Transmitter Output v02r01
5. ANSI C63.10-2013.
6. KDB 484596 D01 Referencing Test Data v01

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1(3m semi-anechoic chamber)
<input checked="" type="checkbox"/>	Chamber 2(3m semi-anechoic chamber)
<input checked="" type="checkbox"/>	Chamber 3(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 4(3m Full-anechoic chamber)
<input type="checkbox"/>	Chamber 5(3m Full-anechoic chamber)

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 28.9 \text{ dBuV/m} &= 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.02 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.05 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.78 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.58 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 2, Clause 4.4.3 in IEC Guide 115:2021.

5. EQUIPMENT UNDER TEST


5.1. EUT DESCRIPTION

The EUT is a BT/BLE, DTS/UNII a/b/g/n/ac/ax and NFC.
 This test report addresses the DTS (WLAN) operational mode.

WiFi operating mode

Frequency rage	Mode	ANT 1	ANT 2
2.4GHz (2412 MHz ~ 2472 MHz)	802.11b SISO	TX/RX	TX/RX
	802.11g MIMO	TX/RX	
	802.11n(HT20) MIMO	TX/RX	
	802.11ax(HE20) MIMO	TX/RX	

802.11ax RU allocations

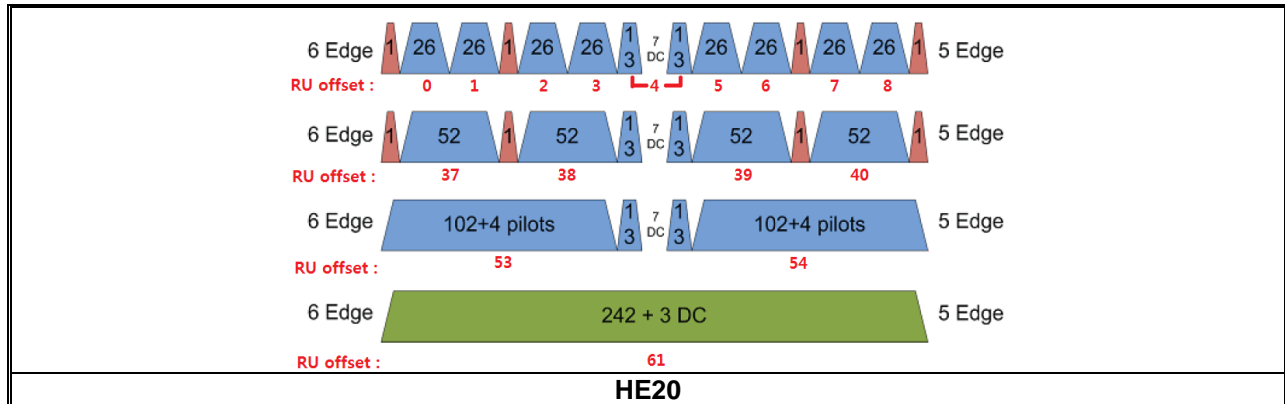

Test RU offset for tones

Mode	Tones number in RU	RU offset
HE20	26T	0
		4
		8
		37
	52T	38
		40
		53
	106T	54
242T / SU <small>Note 1</small>	61 / -	

Note. Full RU(Resource Unit) 242T mode and SU(Single Unit) mode have no difference in physical waveform. This report has been reported the SU mode with highest output power in MIMO.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Frequency Range [MHz]	Mode	Output Power [dBm]		Output Power [mW]	
		ANT1	ANT2	ANT1	ANT2
2412 - 2472	802.11b SISO	19.11	19.18	81.47	82.79
	802.11g MIMO	21.48		140.60	
	802.11n(HT20) MIMO	20.18		104.23	
	802.11ax(HE20) MIMO	20.49		111.94	

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.
 Therefore this E.U.T Complies with the requirement of §15.203.**

Bands [MHz]	ANT 1 [dBi]	ANT 2 [dBi]	Correlated Directional Gain [dBi]
2 412 ~ 2 472	-2.5	-2.5	0.5

Directional gain for the MIMO operations is determined using KDB 662911 D01 Multiple Transmitter Output section F (2)(d)(1) for *Unequal antenna gains, with equal transmit powers*. The gain is calculated using the formula for correlated transmissions across the two transmit antennas. Directional gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi.

Sample calculation for this device with $N_{ANT} = 2$
 Directional gain = $10 \log[(10^{-2.50/20} + 10^{-2.50/20})^2 / 2] = 0.50$ dBi

5.4. TESTED CHANNELS LIST

Ch.	Frequency [MHz]	11b [SISO]	11g [MIMO]	11n(HT20) [MIMO]	11ax(HE20) [MIMO]
1	2 412	O	O	O	O
2	2 417	-	O	O	O
6	2 437	O	O	O	O
10	2 457	-	O	O	O
11	2 462	O	O	O	O
12	2 467	O	O	O	O
13	2 472	O	O	O	O

Note: Tested channels are applied to all test items.

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/High Channels.

Worst case of antenna axis:

ANT1	ANT2	MIMO
X	Z	X

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps 1TX

802.11g mode: 6 Mbps 2TX (CH12, CH13 MCS0 1TX)

802.11n HT20 mode: MCS0 2TX (CH12, CH13 MCS0 1TX)

802.11ax HE20 mode: MCS0 2TX (CH12, CH13 MCS0 1TX)

Worst-case selection criteria for 802.11ax test items :

For the 6dB Bandwidth, it was tested at the RU allocation with lowest tones number for each bandwidth.

All radiated and power line conducted tests were performed attached with travel adapter for the worst case condition mode.

Test case configuration for 802.11b, g, n HT20, ax HE20(SU) modes: Conducted, Radiated

SISO Target[dBm]						MIMO Target[dBm]				
Ch.	Freq.	802.11b	802.11g	802.11n HT20	802.11ax HE20	Ch.	Freq.	802.11g	802.11n HT20	802.11ax HE20
1	2412	19	14	14	14	1	2412	17	17	17
2	2417		18	17	17	2	2417	21	20	20
6	2437	19	18	17	17	6	2437	21	20	20
10	2457		18	17	17	10	2457	21	20	20
11	2462	19	14	14	14	11	2462	17	17	17
12	2467	8	8	8	8	12	2467	8	8	8
13	2472	2	2	2	-4.5	13	2472	2	2	-4.5

- Radiated Band-Edge, Conducted Band-Edge
- Radiated Band-Edge, Radiated Spurious Emission, Conducted Band-Edge, Conducted Spurious Emission, PSD
- Radiated Spurious Emission, Conducted Spurious Emission, PSD

Note1. CH12, 13 SISO & MIMO target power is same. Therefore, radiation was tested in SISO mode. MIMO mode was performed spot-check.
 Note2. In 802.11ax (RU mode), conducted & radiated spurious test was performed on the lower tone(26T) with high density.

Test case configuration for 802.11ax HE20(RU) modes:

MIMO Worst RU offset[dBm]					
Mode	Ch.	Freq.	Tone	RU offset	Test Case
802.11ax RU mode	2	2417	26 T	0	-
				4	-
				8	O
	6	2437		0	-
				4	-
				8	O
	10	2457		0	O
				4	-
				8	-

Note1. In 802.11ax HE20(RU) mode, the test case according to RU offset was selected from the offset with worst average power.
 Note2. Radiated Band-Edge: investigated additional test with other lower RU tones. SU Mode (Worst case) is reported.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacture	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA200	R37N6K421B2SE3	N/A
Data Cable	SAMSUNG	EP-DT725BWE	GH39-02020A	N/A
Earphone	SAMSUNG	EP-TA800	R37N3MAH988DK3	N/A
Charger	SAMSUNG	EP-DN980	GH39-02115A	N/A
Data Cable	SAMSUNG	EP--DT725BWE	GH39-02020A	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C to C Type	Shielded	1.0 m	N/A
2	DC Power	1	C to A Type	Shielded	1.0 m	N/A
3	Audio	2	Mini-jack	Unshielded	0.7 m	N/A


TEST SETUP

The EUT is a stand-alone unit during the tests.
 Test software in hidden menu exercised the EUT to enable DTS mode.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

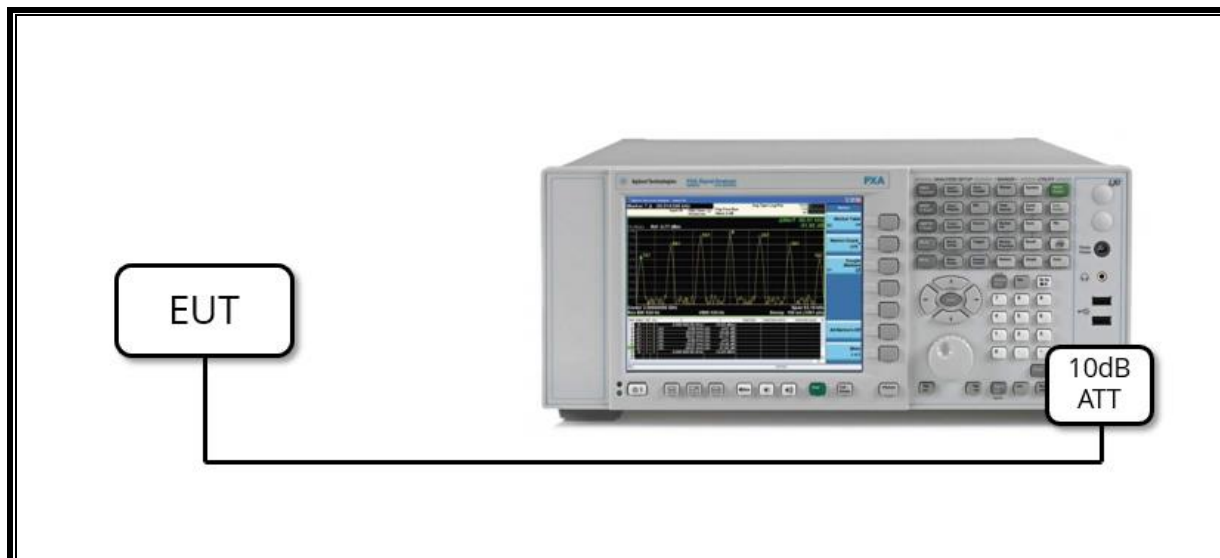

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

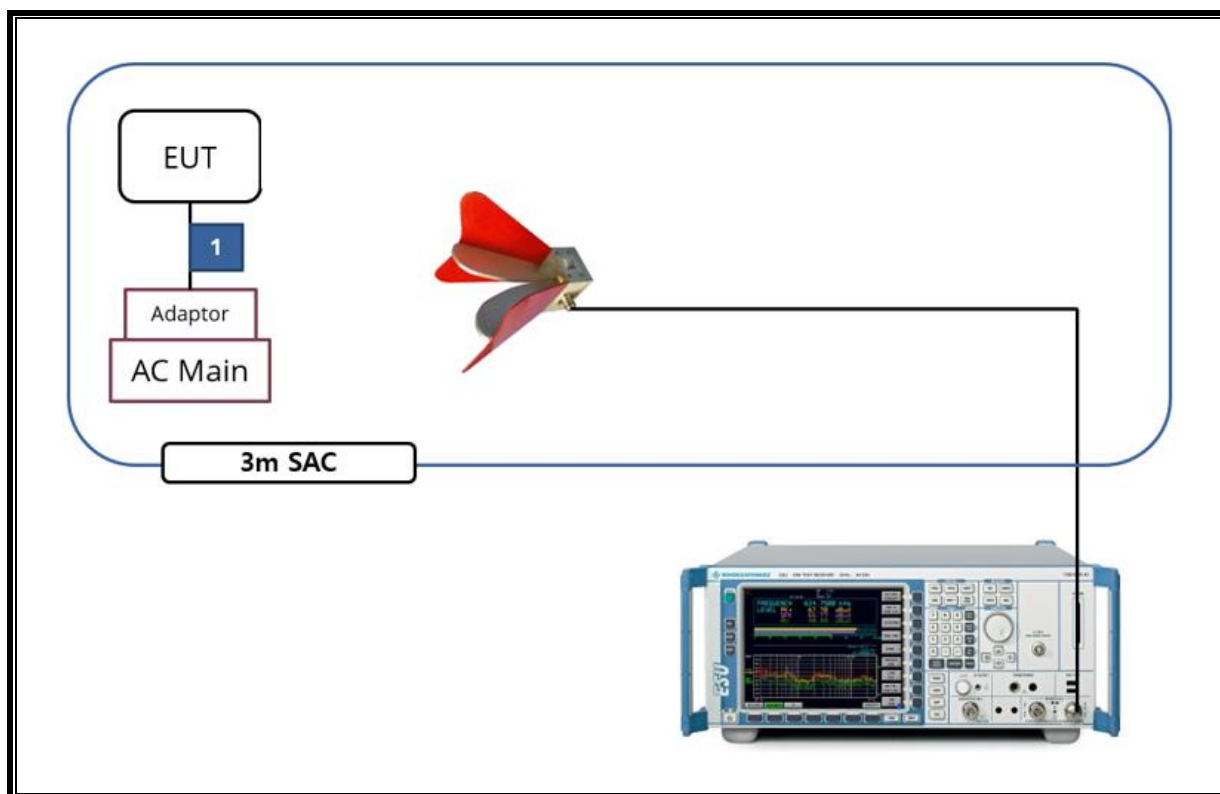

6. MEASUREMENT METHOD

6 dB BW : ANSI C63.10-2013, Section 11.8.2 Option 2

OUTPUT POWER : ANSI C63.10-2013, Section 11.9.2.3.1 Method AVGPM

POWER SPECTRAL DENSITY : ANSI C63.10-2013, Section 11.10.3 & 11.10.5 Method AVGPSD-1 and Method AVGPSD-2

Out-of-band Emissions (Conducted) : ANSI C63.10-2013, Section 11.11 Emissions in nonrestricted frequency bands

Out-of-band Emissions in Non-restricted Bands: ANSI C63.10-2013, Section 11.11 Emissions in nonrestricted frequency bands

Out-of-band Emissions in Restricted Bands : ANSI C63.10-2013, Section 11.12 Emissions in restricted frequency bands

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	2022-08-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	2022-08-13
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	2022-08-13
Antenna, Horn, 18 GHz	ETS	3115	00167211	2022-07-27
Antenna, Horn, 18 GHz	ETS	3115	00161451	2022-08-15
Antenna, Horn, 18 GHz	ETS	3117	00168724	2022-07-27
Antenna, Horn, 18 GHz	ETS	3117	00168717	2022-08-15
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2022-08-04
Preamplifier	ETS	3116C-PA	00168841	2022-08-04
Preamplifier, 1000 MHz	Sonoma	310N	341282	2022-08-02
Preamplifier, 1000 MHz	Sonoma	310N	351741	2022-08-02
Preamplifier, 1000 MHz	Sonoma	310N	370599	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029168	2022-08-02
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	2022-08-04
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	2022-08-04
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9030B	MY60070693	2023-01-18
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9040B	MY60080268	2023-01-19
Average Power Sensor	Agilent / HP	U2000	MY54270007	2022-08-04
Average Power Sensor	Agilent / HP	U2000	MY54260010	2022-08-04
Attenuator	PASTERNAK	PE7087-10	A001	2022-08-03
Attenuator	PASTERNAK	PE7087-10	A008	2022-08-03
Attenuator	PASTERNAK	PE7004-10	2	2022-08-02
Attenuator	PASTERNAK	PE7087-10	A009	2022-08-03
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2022-08-02
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2022-08-02
EMI Test Receive, 3 GHz	R&S	ESR3	101832	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	019	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	020	2022-08-02
LISN	R&S	ENV-216	101837	2022-08-05
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2023-10-06
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

8. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.247 (a)(2)	Occupied Bandwidth (6dB & 99%)	> 500kHz	Conducted	PASS
2.1051, 15.247(d)	Band Edge / Conducted Spurious Emission	-30 dBc		PASS
15.247 (b)(3)	TX conducted output power	< 30 dBm		PASS
15.247(e)	PSD	< 8 dBm/3kHz		PASS
15.207(a)	AC Power Line conducted emissions	Section 11	Power Line conducted	PASS
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m(Av)	Radiated	PASS

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS


None; for reporting purposes only.

Mode	On Time [ms]	Period [ms]	Duty Cycle X [Linear]	Duty Cycle X [%]	Duty Cycle Correction Factor[dB]	1/T Minimum VBW[kHz]
802.11b SISO	17.000	17.110	0.99	99.36	0.03	0.06
802.11g SISO & MIMO	2.827	2.933	0.96	96.39	0.16	0.35
802.11n(HT20) SISO & MIMO	5.030	5.139	0.98	97.88	0.09	0.20
802.11ax(HE20) MIMO SU	5.445	5.458	1.00	99.76	0.01	0.18
802.11ax(HE20) MIMO 26T	2.595	2.619	0.99	99.08	0.04	0.39
802.11ax(HE20) MIMO 52T	2.589	2.613	0.99	99.08	0.04	0.39
802.11ax(HE20) MIMO 106T	2.427	2.454	0.99	98.90	0.05	0.41


Note. According to ANSI C63.10 Section 11.6, do not apply the Duty Cycle Correction Factor judging that a duty cycle of greater than or equal to 98% is continuous signal.

802.11b

802.11g


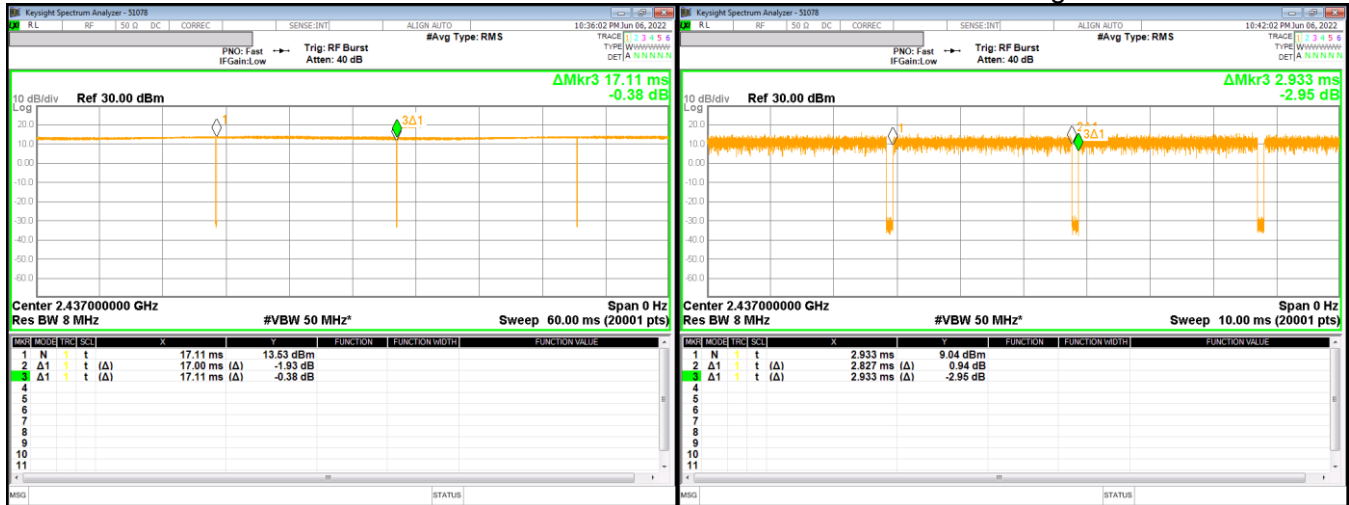


802.11n HT20

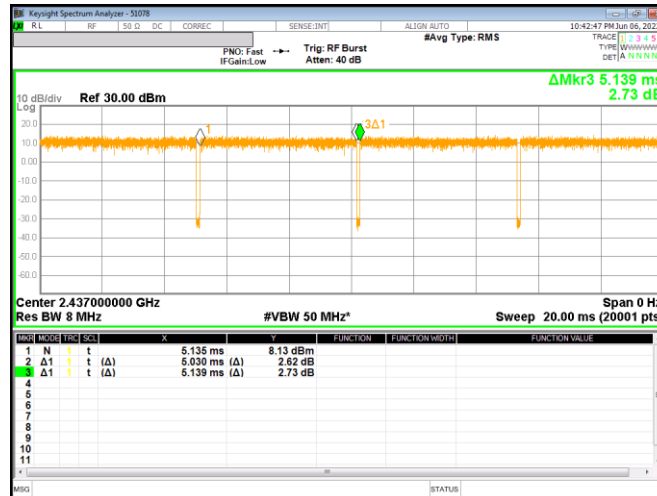



802.11ax(HE20) MIMO SU

802.11ax(HE20) MIMO 26T

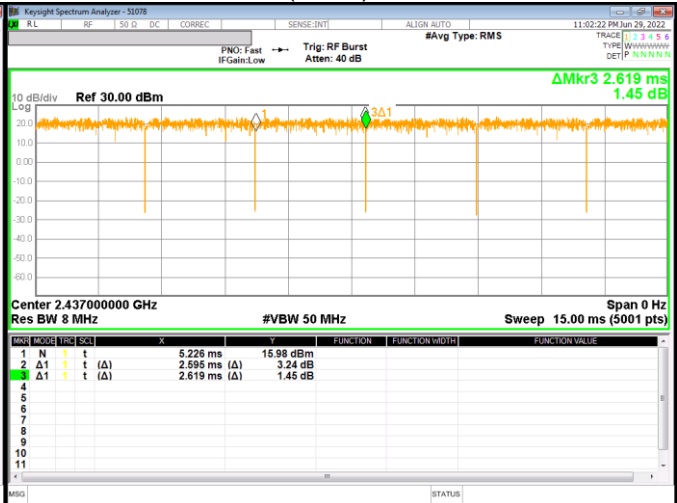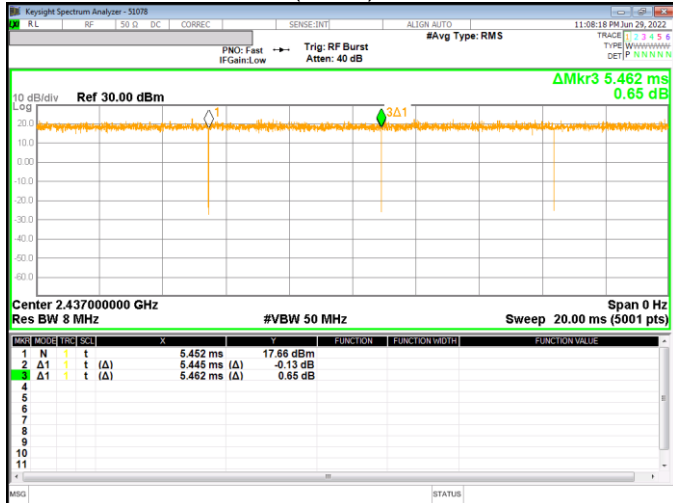

802.11ax(HE20) MIMO 52T

802.11ax(HE20) MIMO 106T

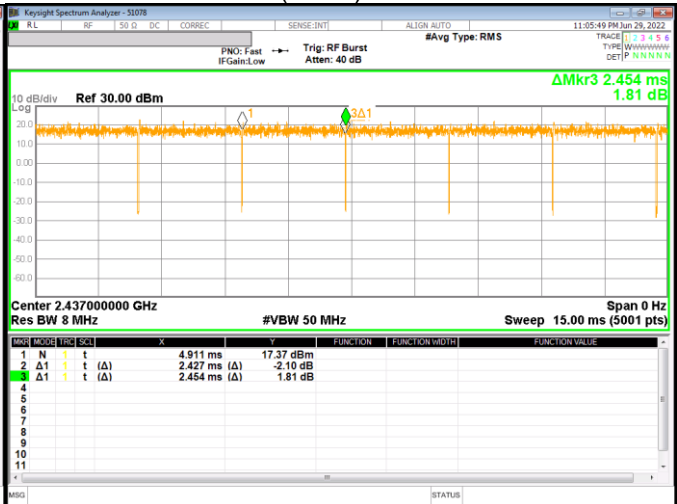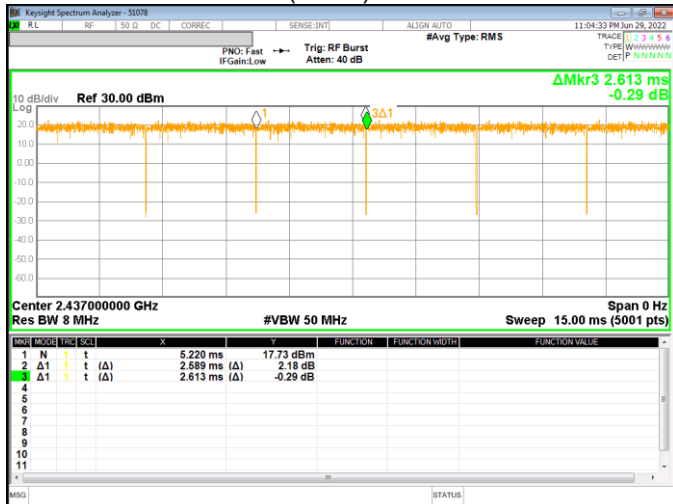

9.2. 6 dB BANDWIDTH

LIMITS

6dB Bandwidth:

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE


Reference to KDB 558074 D01 15.247 Meas Guidance: The transmitter output is connected to a spectrum analyzer with the RBW set to 100 kHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

ANSI C63.10-2013, Section 11.8.1

RESULTS

- Please refer to the next page

WORST CASE TEST PLOTS

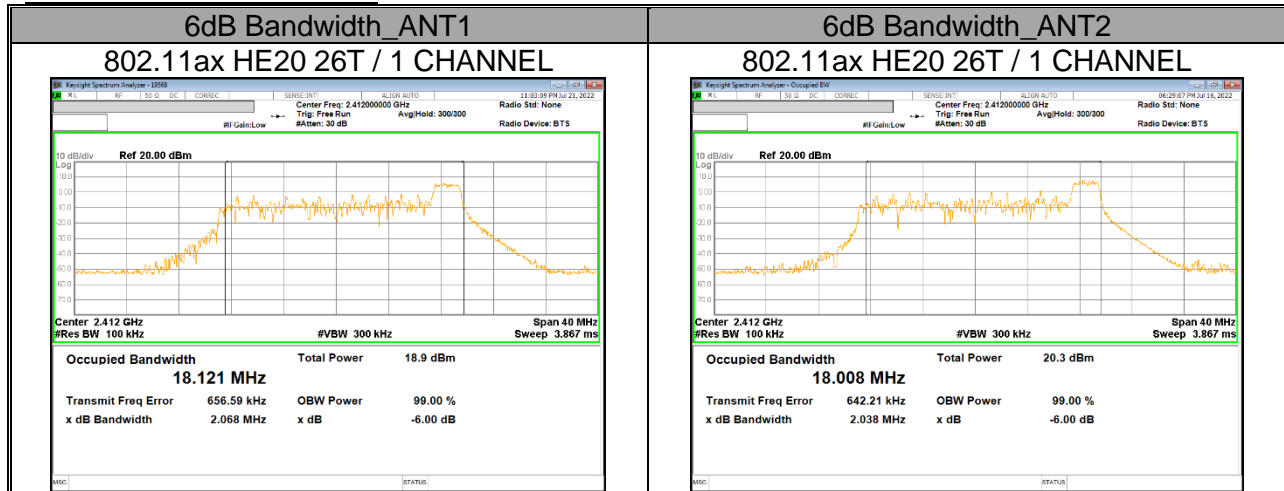

9.2.1. 802.11b SISO MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
		ANT 1	ANT 2	
1	2 412	7.051	7.504	0.5
6	2 437	8.533	8.041	
11	2 462	7.563	7.572	
12	2 467	7.579	8.247	
13	2 472	8.502	7.524	
Worst		7.051	7.504	

9.2.2. 802.11g MIMO MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
		ANT 1	ANT 2	
1	2 412	16.050	16.310	0.5
2	2 417	16.310	16.290	
6	2 437	16.270	15.890	
10	2 457	16.040	16.350	
11	2 462	16.300	16.330	
12	2 467	16.310	16.330	
13	2 472	16.030	16.320	
Worst		16.030	15.890	

9.2.3. 802.11n HT20 MIMO MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
		ANT 1	ANT 2	
1	2 412	17.170	16.290	0.5
2	2 417	16.890	17.180	
6	2 437	17.270	16.880	
10	2 457	17.540	17.550	
11	2 462	16.870	17.570	
12	2 467	16.770	17.270	
13	2 472	17.150	17.300	
Worst		16.770	16.290	

9.2.4. 802.11ax HE20 MIMO MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
		ANT 1	ANT 2	
1 (26T)	2 412	2.068	2.038	0.5
2 (26T)	2 417	2.141	2.063	
6 (26T)	2 437	2.092	2.086	
10 (26T)	2 457	2.096	2.100	
11 (26T)	2 462	12.030	2.130	
12 (26T)	2 467	2.114	2.065	
13 (26T)	2 472	2.113	2.141	
Worst		2.092	2.038	

9.3. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Measurements perform using a wideband RF frame average power sensor. The cable assembly insertion loss and duty cycle correction factor was entered as an offset in the power sensor to allow for direct reading of power. Output power measurement was performed utilizing the 8.3.2.3 under KDB558074 D01 15.247 Meas Guidance.

ANSI C63.10-2013, Section 11.9.2.3.1 Method AVGPM

DIRECTIONAL ANTENNA GAIN

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Bands [MHz]	ANT 1 [dBi]	ANT 2 [dBi]	Correlated Directional Gain [dBi]
2 412 ~ 2 472	0.40	0.30	3.36

Note. Since the correlated directional gain does not exceed 6dBi, it is not mentioned further below.

9.3.1. TEST RESULTS

- 802.11b,g,n,ax(SU) mode

Mode	Channel	Frequency [MHz]	SISO Average Power [dBm]		MIMO Average Power [dBm]			Power Limit [dBm]
			ANT1	ANT2	ANT1	ANT2	Total Corr'd Power [dBm]	
802.11b	1	2 412	19.10	19.07	Not Supported			30.00
	6	2 437	19.11	19.04				
	11	2 462	19.07	19.18				
	12	2 467	8.25	7.90				
	13	2 472	1.91	2.01				
Worst Case			19.11	19.18				
802.11g	1	2 412	16.62	16.76	16.62	16.76	19.70	
	2	2 417	18.17	18.48	18.17	18.48	21.34	
	6	2 437	17.80	18.24	17.80	18.24	21.04	
	10	2 457	18.32	18.61	18.32	18.61	21.48	
	11	2 462	15.14	15.67	15.14	15.67	18.42	
	12	2 467	7.93	8.17	4.30	4.46	7.39	
	13	2 472	1.96	2.08	-1.82	0.74	2.66	
Worst Case			18.32	18.61			21.48	
802.11n HT20	1	2 412	14.27	14.68	14.27	14.68	17.49	
	2	2 417	16.90	17.12	16.90	17.12	20.02	
	6	2 437	16.70	17.25	16.70	17.25	19.99	
	10	2 457	16.90	17.42	16.90	17.42	20.18	
	11	2 462	14.06	14.51	14.06	14.51	17.30	
	12	2 467	7.86	8.09	4.35	4.55	7.46	
13	2 472	2.21	2.31	-1.77	0.91	2.78		
Worst Case			16.90	17.42			20.18	
802.11ax HE20(SU)	1	2 412	14.17	15.29	14.17	15.29	17.78	
	2	2 417	17.26	17.34	17.26	17.34	20.31	
	6	2 437	17.17	17.77	17.17	17.77	20.49	
	10	2 457	17.20	17.65	17.20	17.65	20.44	
	11	2 462	13.95	14.68	13.95	14.68	17.34	
	12	2 467	8.32	8.56	4.78	5.12	7.96	
13	2 472	-4.38	-4.84	-8.25	-5.68	-3.77		
Worst Case			17.26	17.77			20.49	

- Calculation of Output Power result

Average Power = Meas. Power + Duty Cycle CF / Total Corr'd Power = ANT1's Average Power + ANT2's Average Power

- 802.11ax (RU) mode

Channel	Frequency [MHz]	Tones	RU Offset	SISO Average Power [dBm]		MIMO Average Power [dBm]			Power Limit [dBm]		
				ANT1	ANT1	ANT1	ANT2	Total Corr'd Power [dBm]			
1	2 412	26T	0	10.95	11.45	10.95	11.45	14.22	30.00		
			4	11.14	11.43	11.14	11.43	14.30			
			8	10.92	11.84	10.92	11.84	14.41			
			37	12.54	13.46	12.54	13.46	16.03			
		52T	38	12.87	13.76	12.87	13.76	16.35			
			40	12.81	13.79	12.81	13.79	16.34			
			53	13.83	14.82	13.83	14.82	17.36			
			54	13.51	14.54	13.51	14.54	17.07			
		2	2 417	26T	0	10.73	10.54	10.73		10.54	13.65
					4	11.29	11.26	11.29		11.26	14.29
					8	11.37	11.84	11.37		11.84	14.62
					37	13.12	12.97	13.12		12.97	16.06
52T	38			13.43	13.35	13.43	13.35	16.40			
	40			13.65	14.16	13.65	14.16	16.92			
	53			14.32	14.04	14.32	14.04	17.19			
	54			14.67	14.92	14.67	14.92	17.81			
6	2 437			26T	0	11.03	11.51	11.03	11.51	14.29	
					4	10.91	11.40	10.91	11.40	14.17	
					8	10.98	11.26	10.98	11.26	14.13	
					37	12.97	13.51	12.97	13.51	16.26	
		52T	38	13.00	13.53	13.00	13.53	16.28			
			40	12.94	13.74	12.94	13.74	16.37			
			53	13.61	14.57	13.61	14.57	17.13			
			54	13.86	14.51	13.86	14.51	17.21			
		10	2 457	26T	0	10.74	11.36	10.74	11.36	14.07	
					4	10.78	11.16	10.78	11.16	13.98	
					8	11.39	11.66	11.39	11.66	14.54	
					37	13.40	13.97	13.40	13.97	16.70	
52T	38			13.45	13.92	13.45	13.92	16.70			
	40			13.42	13.85	13.42	13.85	16.65			
	53			14.03	14.50	14.03	14.50	17.28			
	54			14.04	14.45	14.04	14.45	17.26			
11	2 462			26T	0	10.93	11.86	10.93	11.86	14.43	
					4	10.98	11.76	10.98	11.76	14.40	
					8	10.86	11.72	10.86	11.72	14.32	
					37	12.85	13.70	12.85	13.70	16.31	
		52T	38	12.94	13.74	12.94	13.74	16.37			
			40	12.83	13.62	12.83	13.62	16.25			
			53	13.77	14.75	13.77	14.75	17.30			
			54	13.82	14.72	13.82	14.72	17.30			
		12	2 467	26T	0	8.56	8.78	4.93	4.82	7.89	
					4	8.77	8.81	4.92	4.80	7.87	
					8	8.30	8.53	4.44	4.57	7.52	
					37	8.52	8.71	4.89	4.73	7.82	
52T	38			8.66	8.74	4.95	4.83	7.90			
	40			8.35	8.62	4.50	4.62	7.57			
	53			8.66	8.77	4.95	4.86	7.92			
	54			8.62	8.76	4.68	4.82	7.76			
13	2 472			26T	0	-4.39	-4.96	-8.12	-5.66	-3.71	
					4	-4.58	-5.24	-8.35	-5.97	-3.99	
					8	-4.85	-5.58	-9.14	-6.54	-4.64	
					37	-4.49	-4.99	-8.09	-5.75	-3.75	
		52T	38	-4.48	-5.09	-8.17	-5.85	-3.85			
			40	-4.75	-5.47	-9.06	-6.52	-4.60			
			53	-4.22	-4.76	-8.01	-5.55	-3.60			
			54	-4.69	-5.37	-8.71	-5.84	-4.03			
		Worst Case				14.67	14.92			17.81	

9.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE


Power Spectral Density was performed utilizing the section 8.4 under KDB558074 D01 15.247 Meas Guidance.

ANSI C63.10-2013, Section 11.10.3 & 11.10.5

RESULTS

- Please refer to the next page

WORST CASE TEST PLOTS

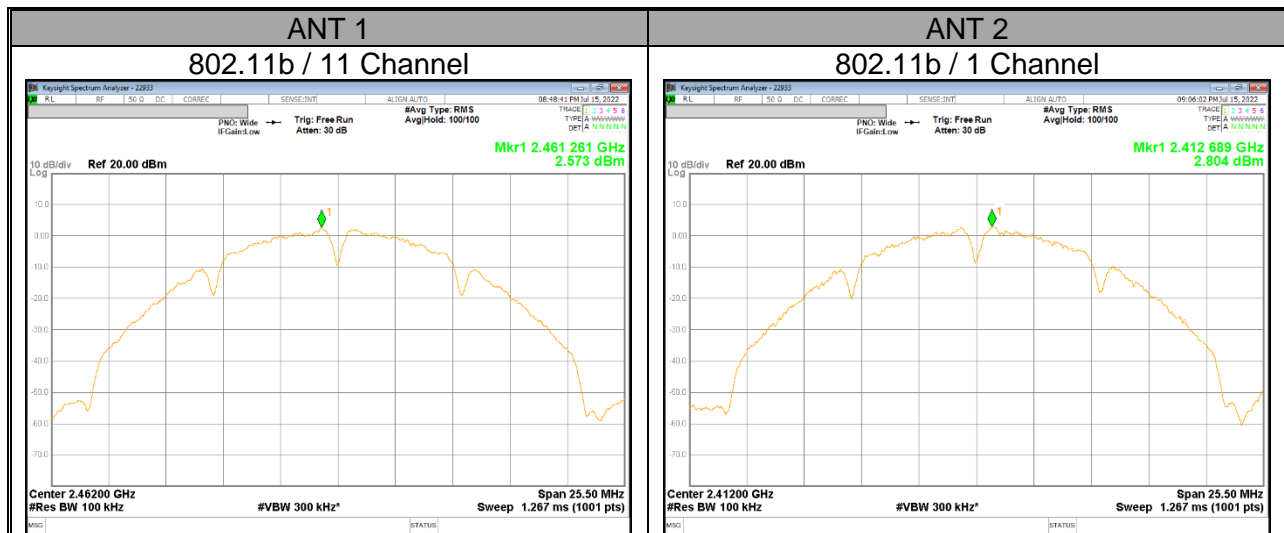

9.4.1. 802.11b/g/n HT20 MODE TEST RESULTS

- SISO Mode

Mode	Channel	Frequency [MHz]	Meas PSD [dBm/100kHz]		DCCF	Total Corr'd PSD [dBm/100kHz]		PSD Limit [dBm/3kHz]
			ANT1	ANT2		ANT1	ANT2	
802.11b	1	2 412	2.178	2.804	-	2.178	2.804	8.00 ^{Note}
	6	2 437	2.141	2.605	-	2.141	2.605	
	11	2 462	2.573	2.802	-	2.573	2.802	

- MIMO Mode (Ant1 + Ant2)

Mode	Channel	Frequency [MHz]	Meas PSD [dBm/100kHz]		DCCF	Total Corr'd PSD [dBm/100kHz]	PSD Limit [dBm/3kHz]
			ANT1	ANT2			
802.11g	2	2 417	-1.395	-1.242	0.16	1.852	8.00 ^{Note}
	6	2 437	-1.932	-1.553	0.16	1.432	
	10	2 457	-1.728	-1.092	0.16	1.772	
802.11ax HE20	2	2 417	-3.187	-2.934	0.09	0.042	
	6	2 437	-3.376	-2.656	0.09	0.099	
	10	2 457	-3.179	-2.539	0.09	0.253	

- MIMO Mode (802.11ax HE20) (Ant1 + Ant2)

Channel	Frequency [MHz]	Tones	RU Offset	Meas PPSD [dBm/100kHz]		DCCF	Total Corr'd PSD [dBm/100kHz]	PSD Limit [dBm/3kHz]
				ANT1	ANT2			
2	2 417	26T	0	-1.482	-2.125	-	1.379	8.00 ^{Note}
			4	-1.058	-1.667	-	1.818	
			8	-0.718	-0.751	-	2.436	
6	2 437	26T	0	-1.967	-1.425	-	1.413	
			4	-2.071	-1.652	-	1.244	
			8	-1.483	-1.321	-	1.699	
10	2 457	26T	0	-1.274	-1.464	-	1.642	
			4	-1.366	-1.655	-	1.502	
			8	-0.759	-0.721	-	2.270	

Calculation of Output PSD result

- 1TX : Corr'd PSD = Meas PSD + Duty Cycle CF

- 2TX : Total PSD = ANT1 Meas PSD + ANT2 Meas PSD + Duty Cycle CF

Note1. RBW 100kHz measurement data is lower than 3kHz limit.

Note2. 12,13ch's PSD test was omitted (Channel 12&13's target is much lower than other channels)

9.5. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Output power was measured based on the use of average measurement, therefore the required attenuation is 30 dB.


TEST PROCEDURE


KDB 558074 D01 v05r02, Section 8.5
ANSI C63.10-2013, Section 11.11.3

RESULTS


9.5.1. 802.11b MODE

1TX Antenna 1

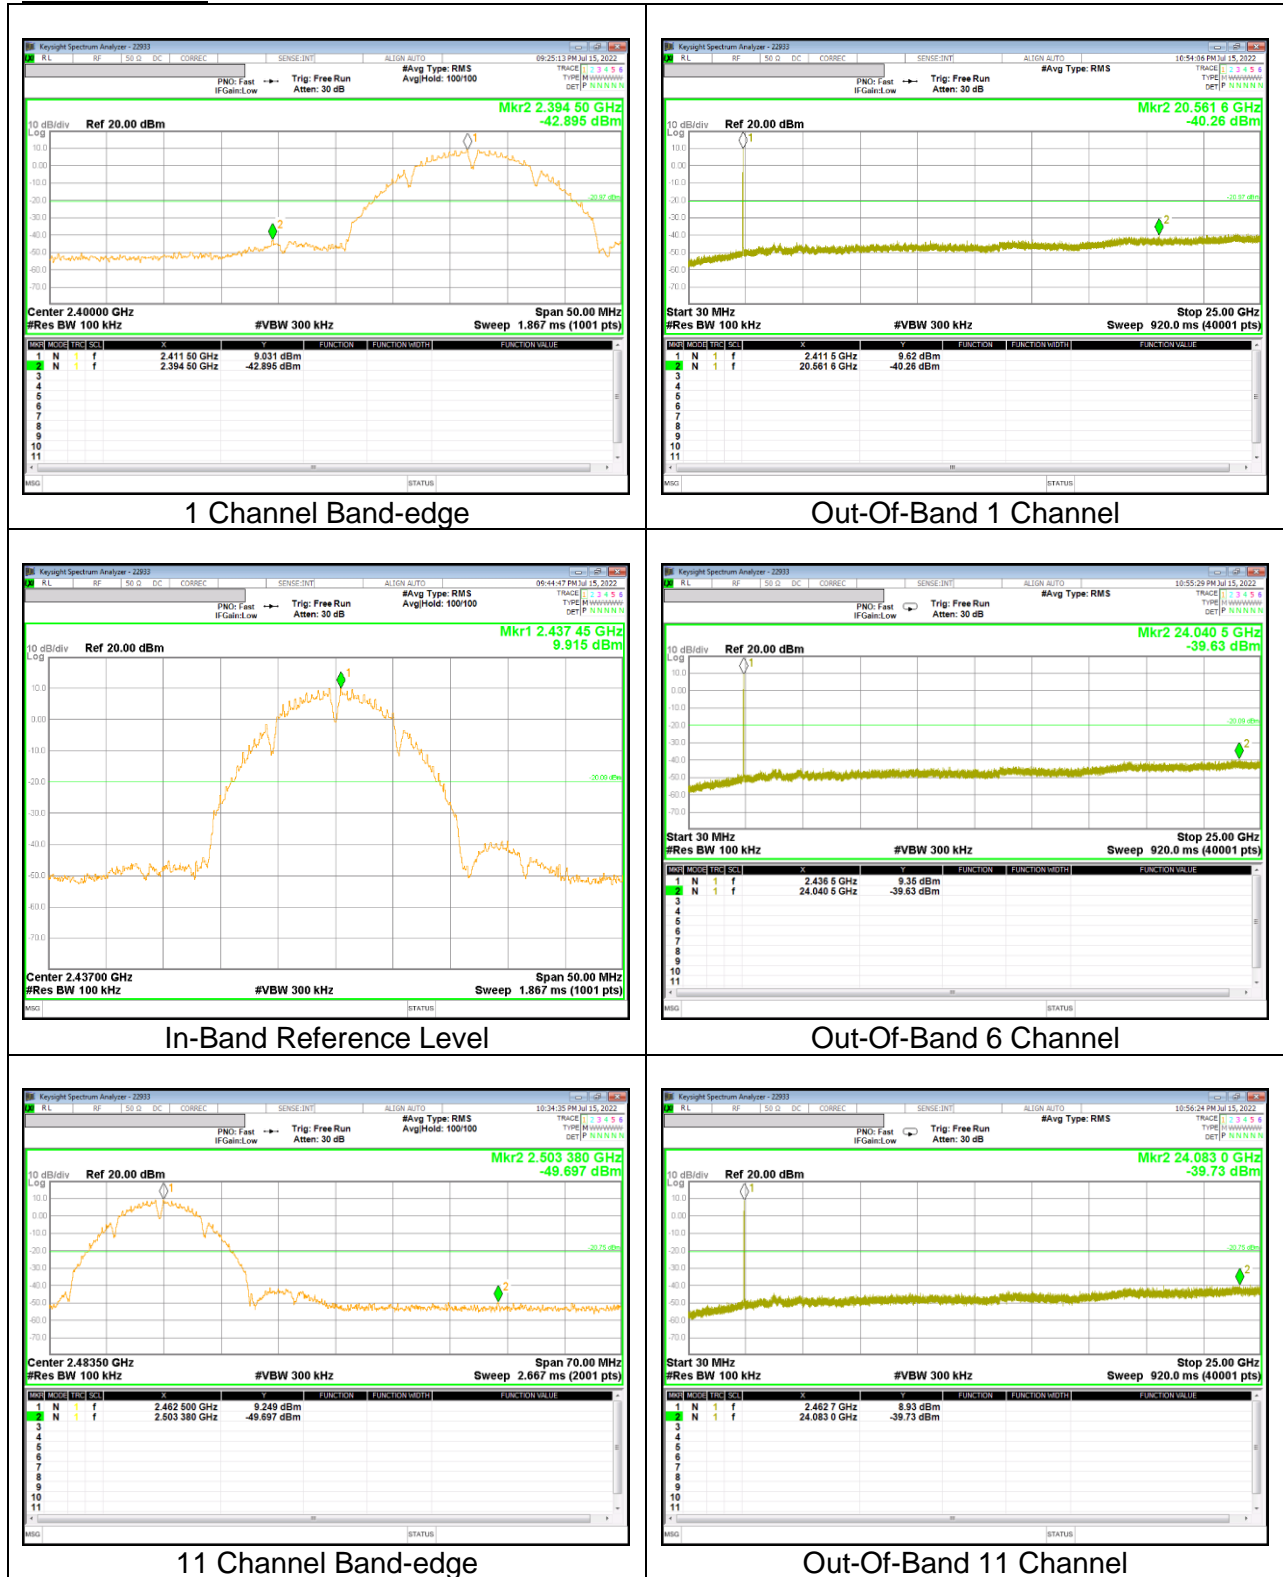

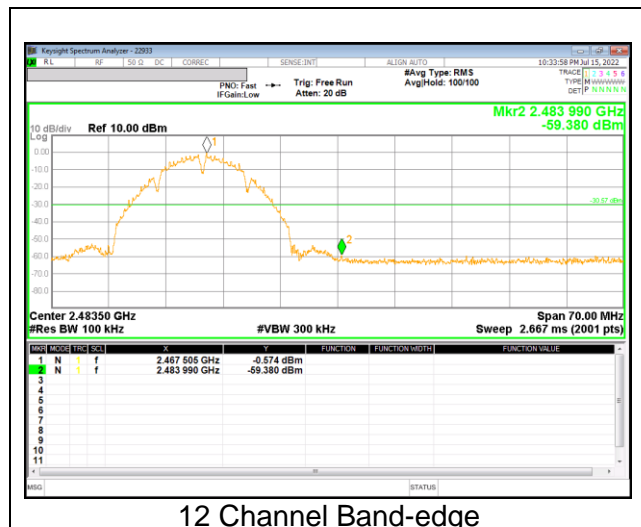




12 Channel Band-edge

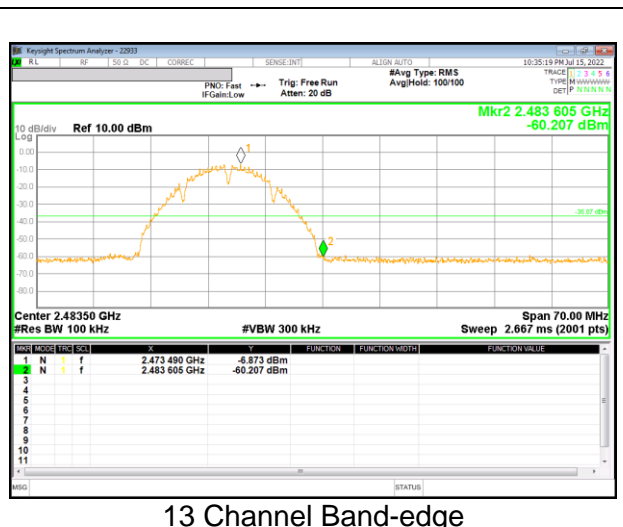

13 Channel Band-edge


1TX Antenna 2

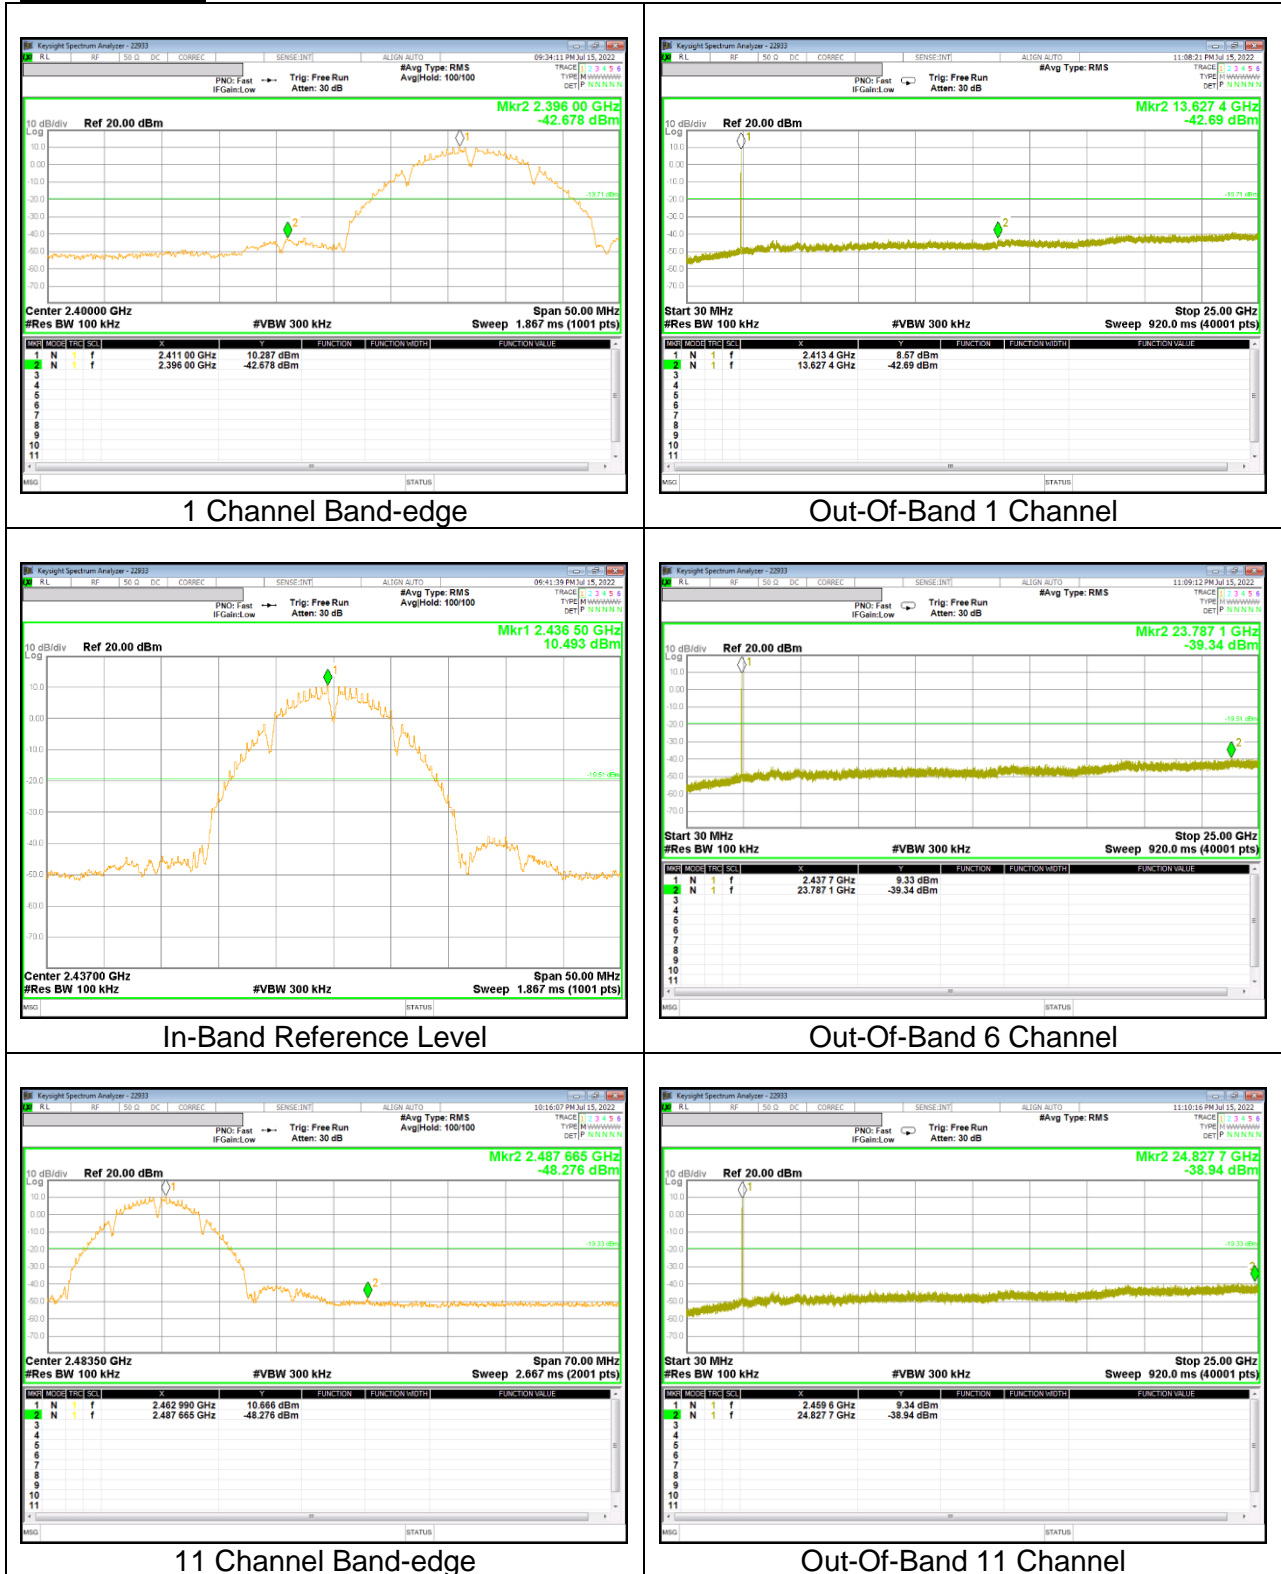


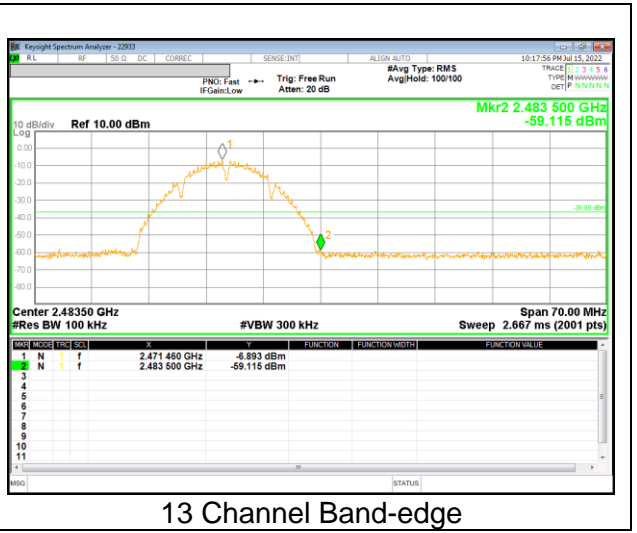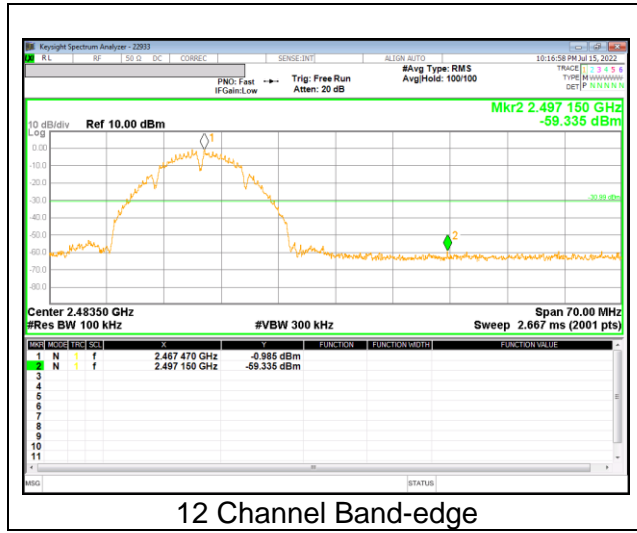


9.5.2. 802.11g MODE

1TX Antenna 1

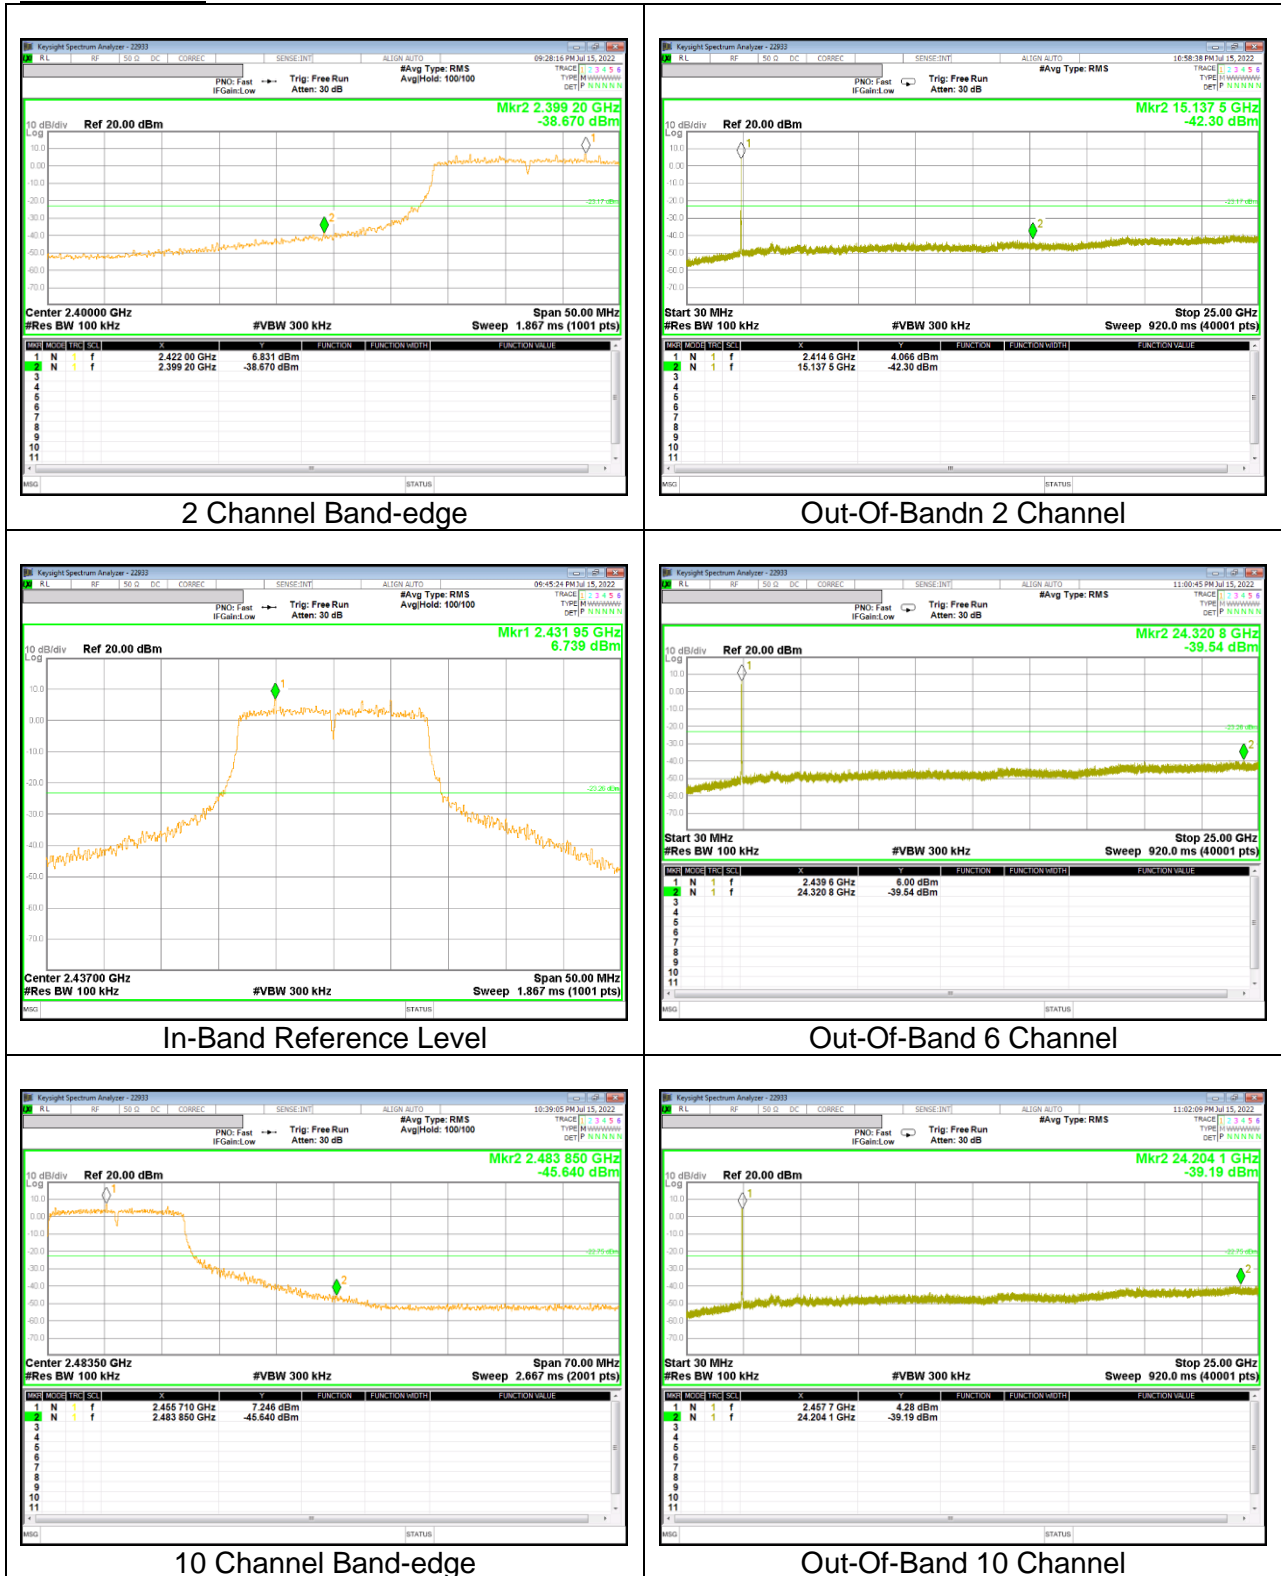


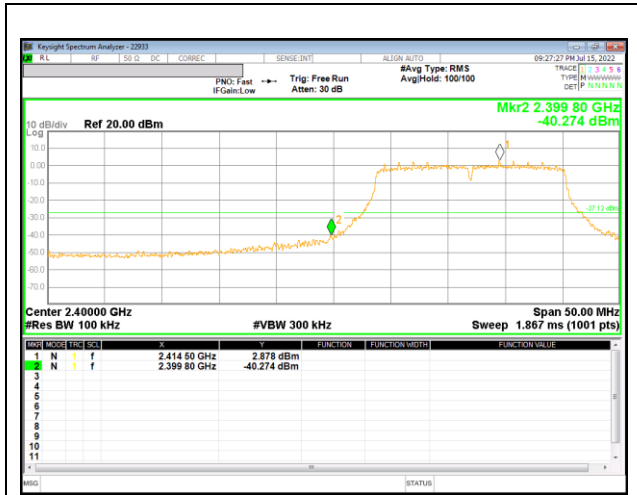


1 Channel Band-edge

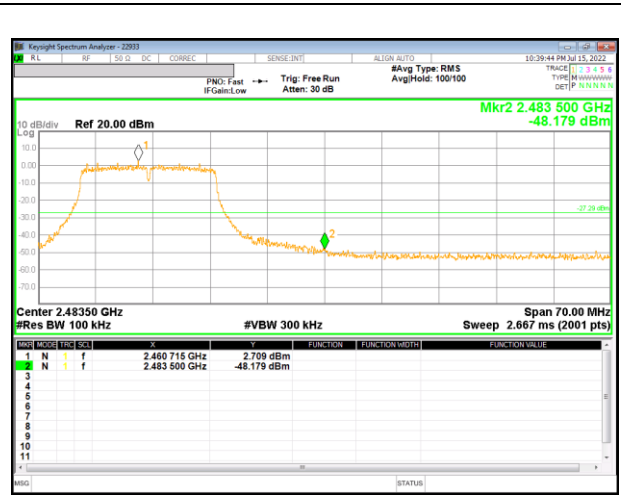


11 Channel Band-edge

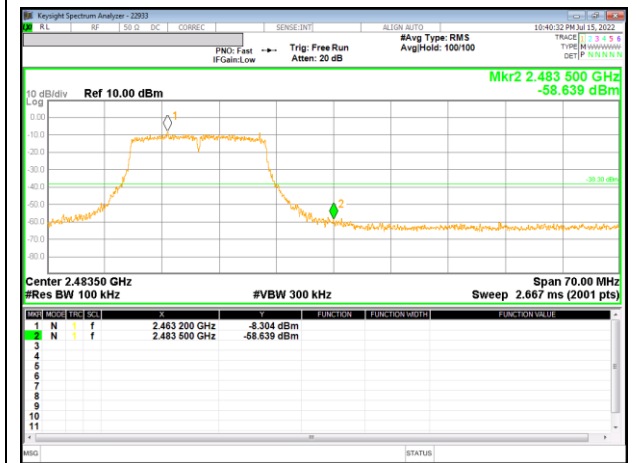


12 Channel Band-edge

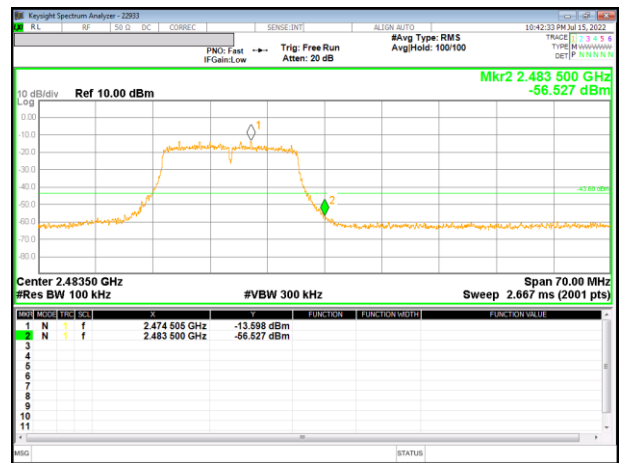

13 Channel Band-edge

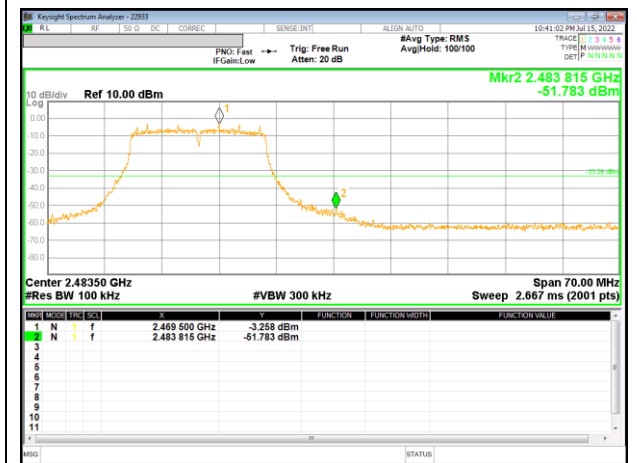



12 Channel Band-edge_SISO

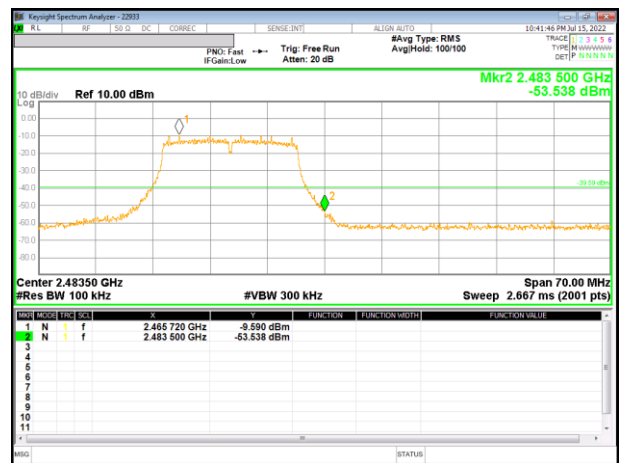


13 Channel Band-edge_SISO

1TX Antenna 2

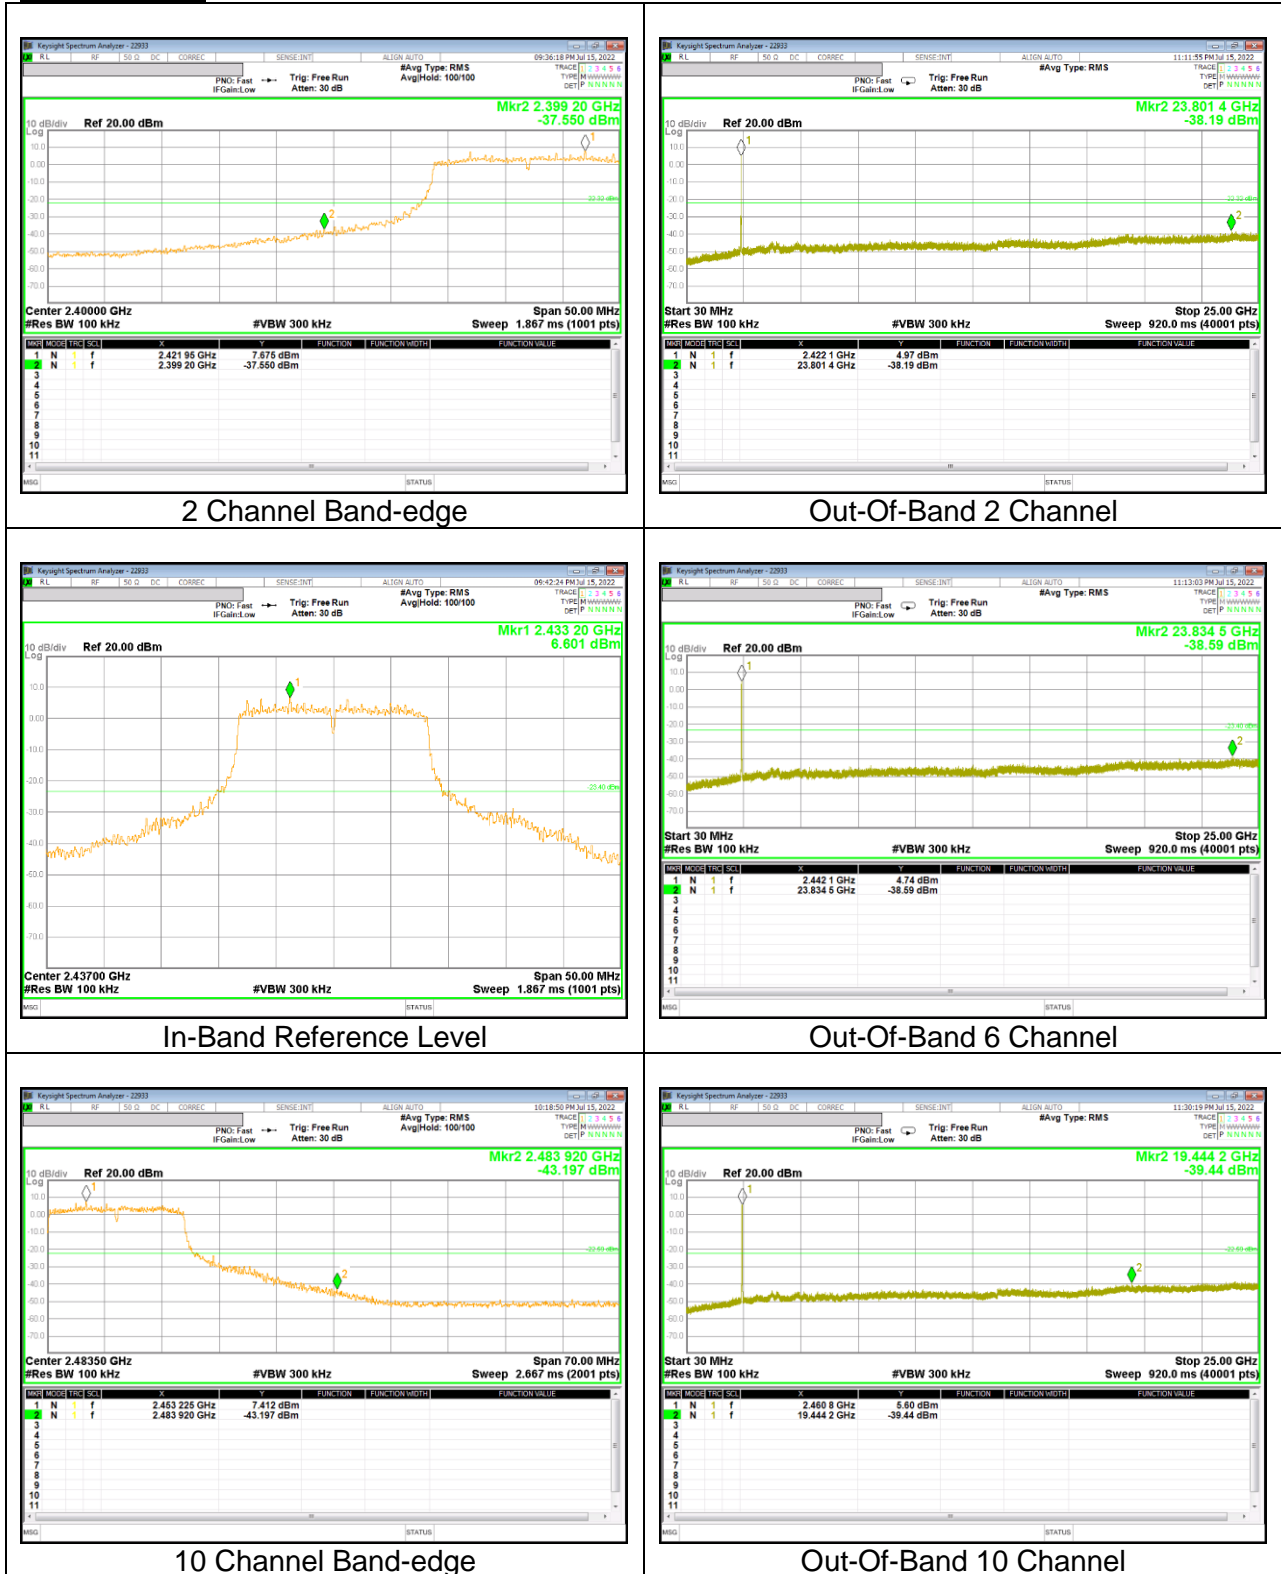


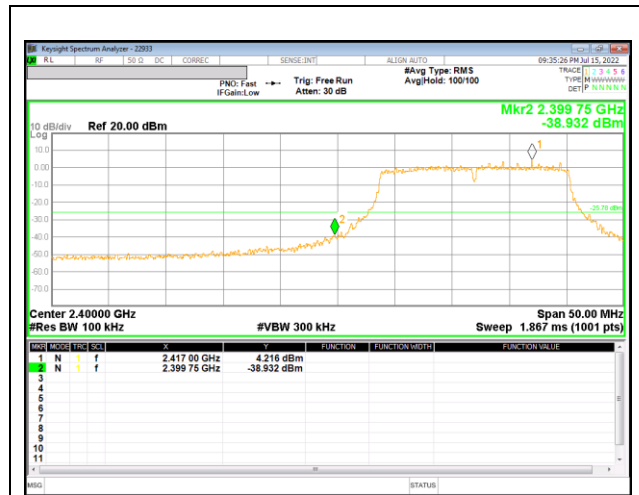


1 Channel Band-edge

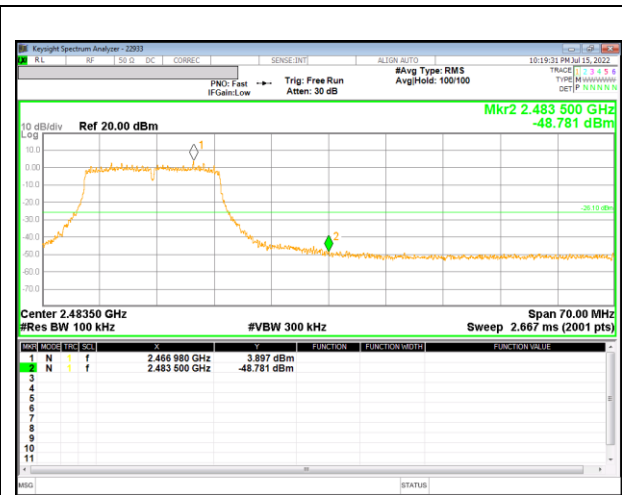


11 Channel Band-edge

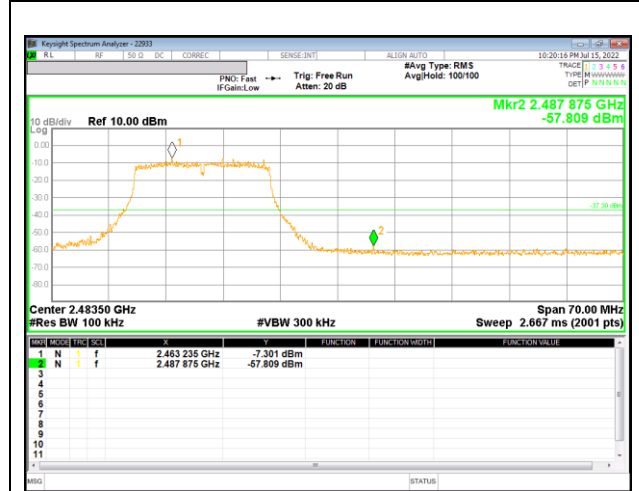


12 Channel Band-edge

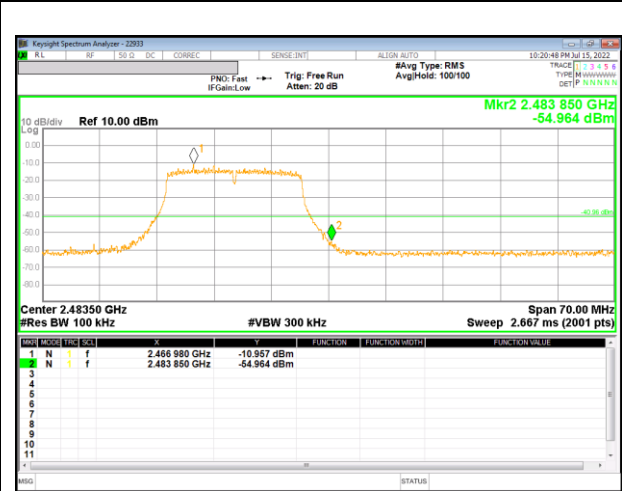

13 Channel Band-edge

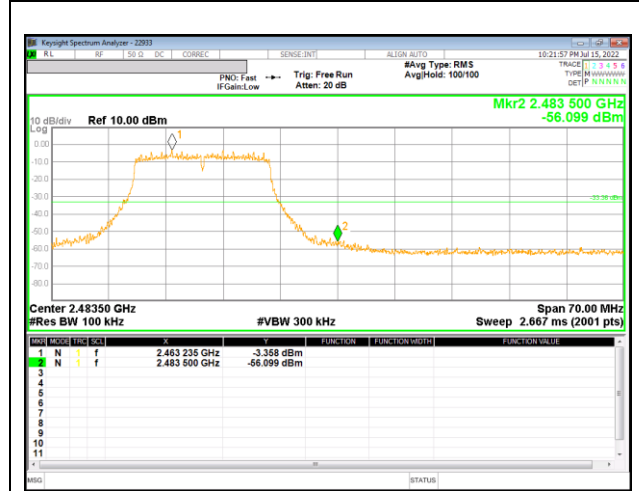


12 Channel Band-edge_SISO

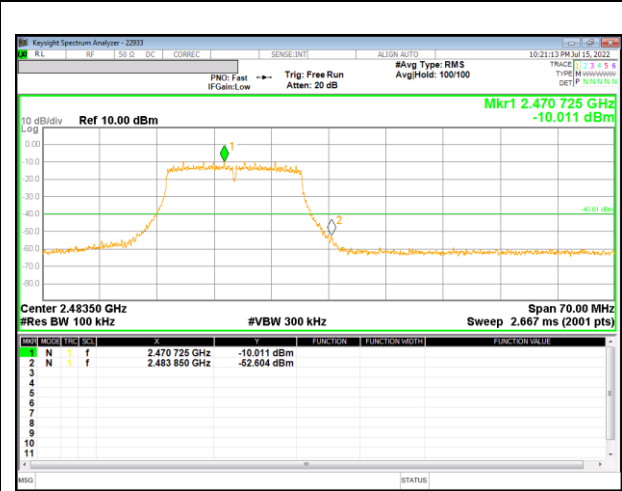


13 Channel Band-edge_SISO


9.5.3. 802.11n HT20 MODE

1TX Antenna 1

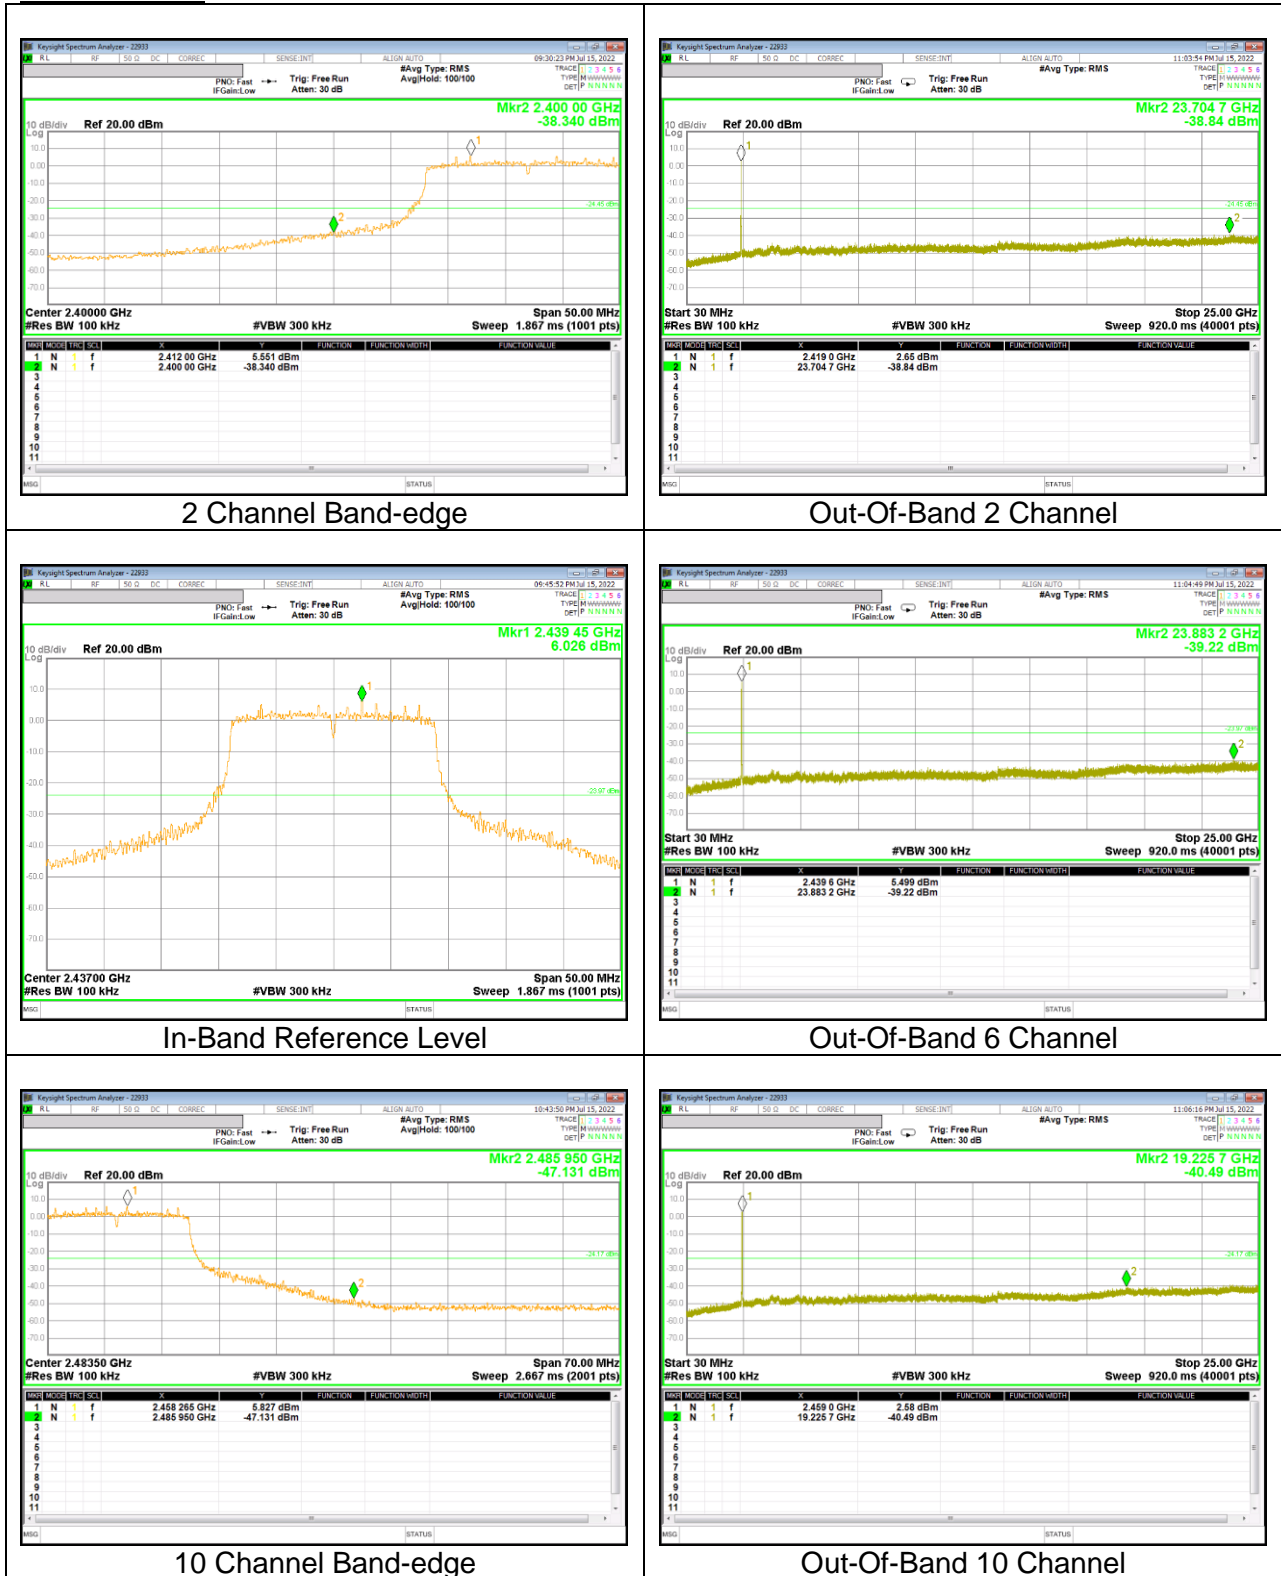


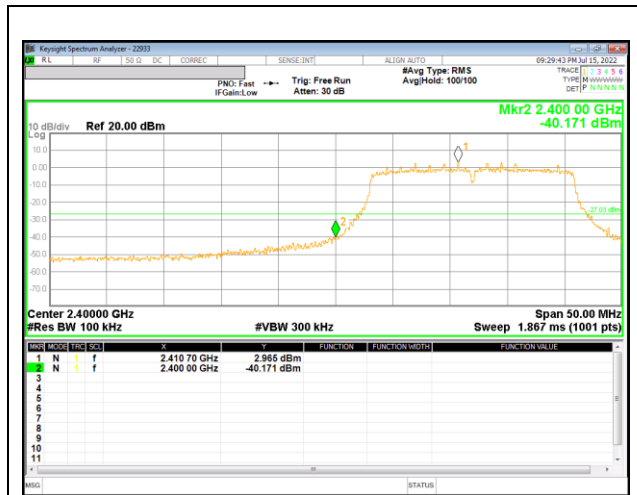


1 Channel Band-edge

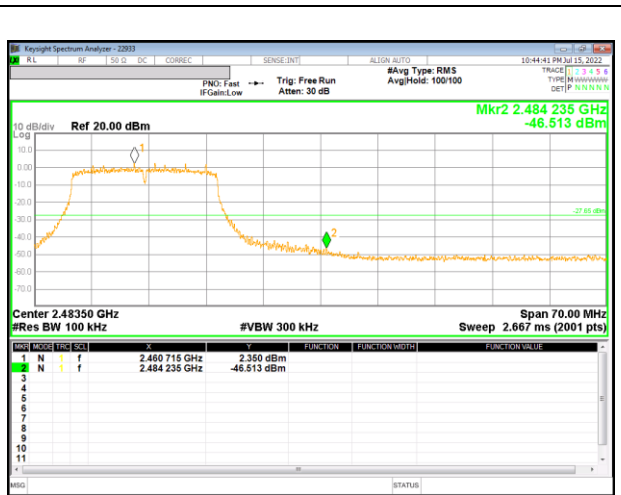


11 Channel Band-edge

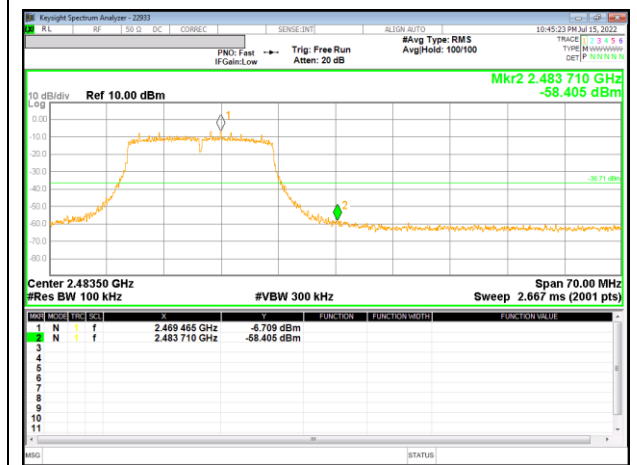


12 Channel Band-edge

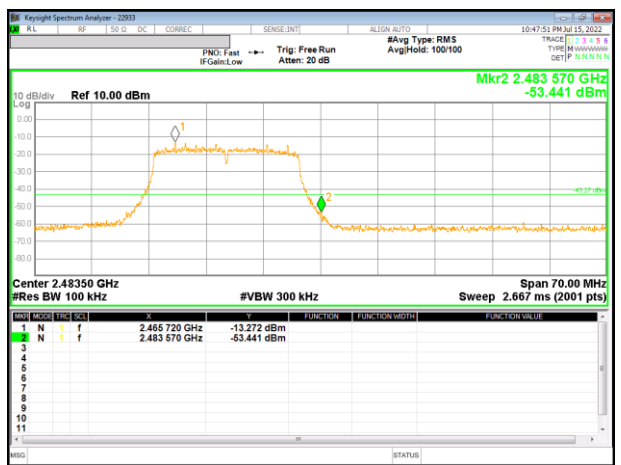

13 Channel Band-edge

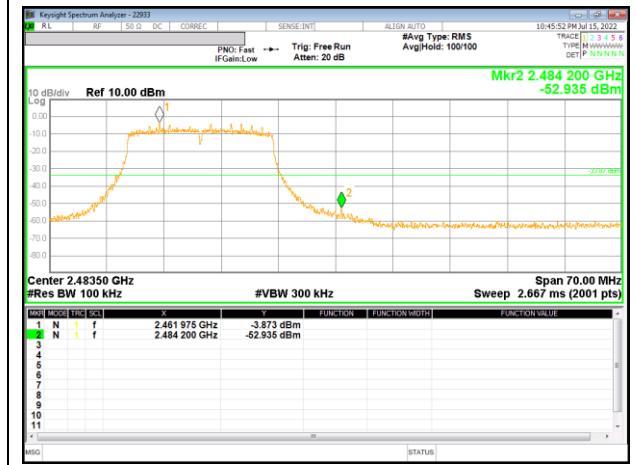



12 Channel Band-edge_SISO

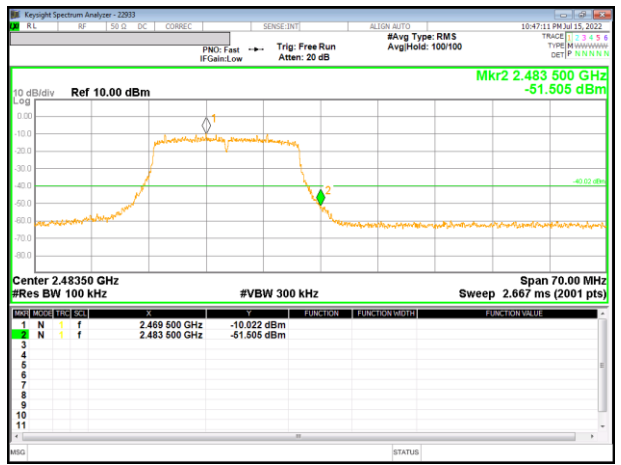


13 Channel Band-edge_SISO

1TX Antenna 2

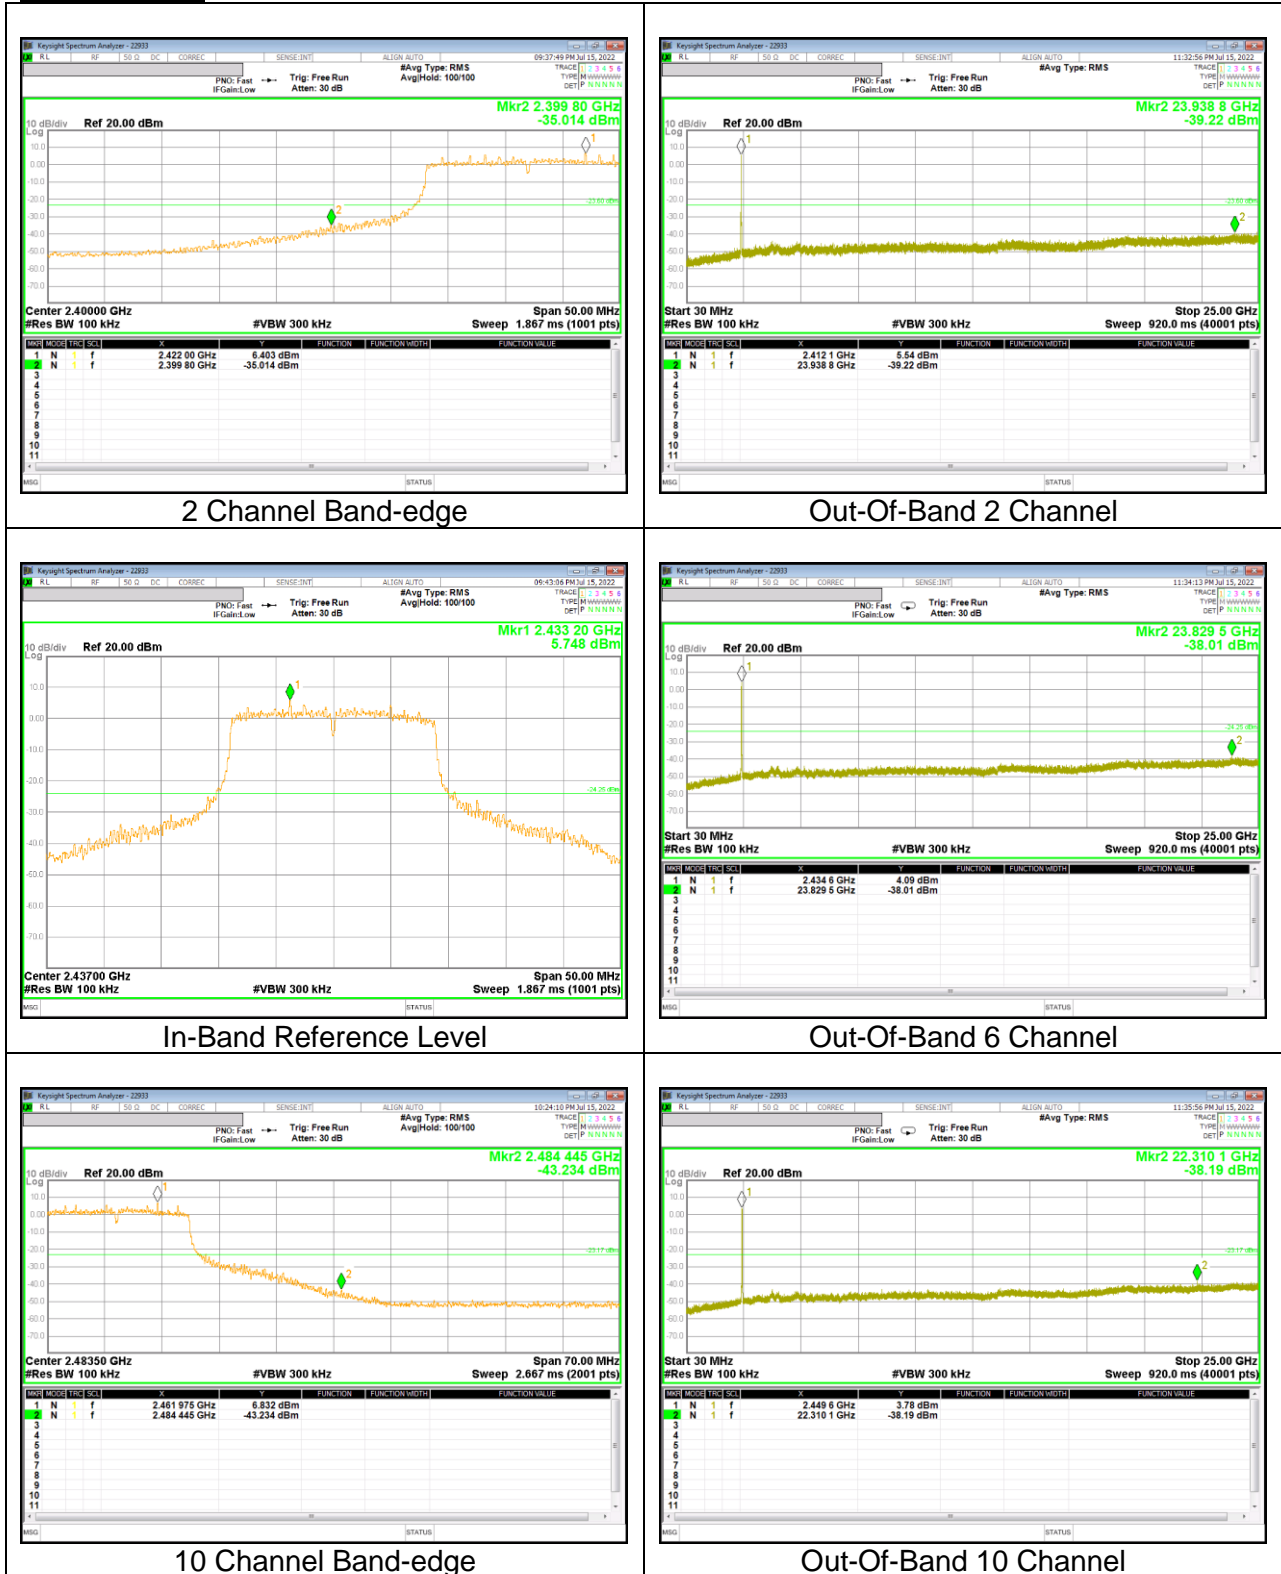


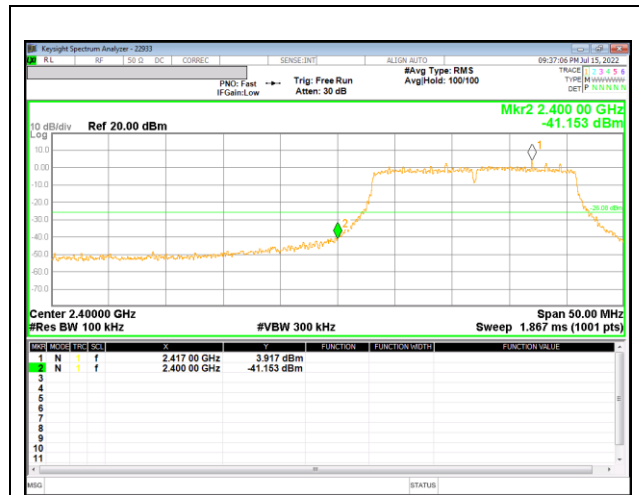


1 Channel Band-edge

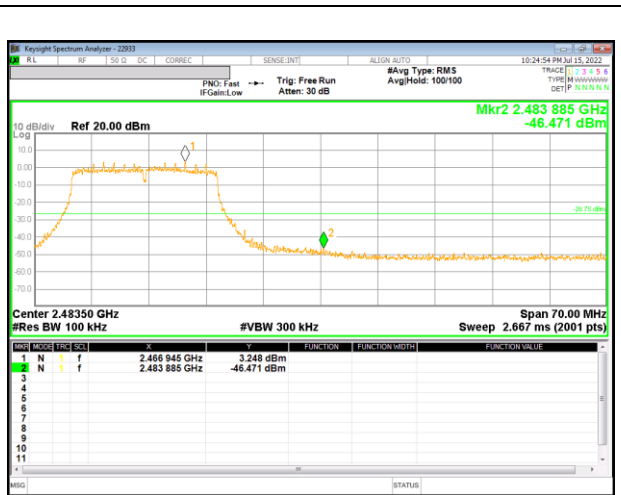


11 Channel Band-edge

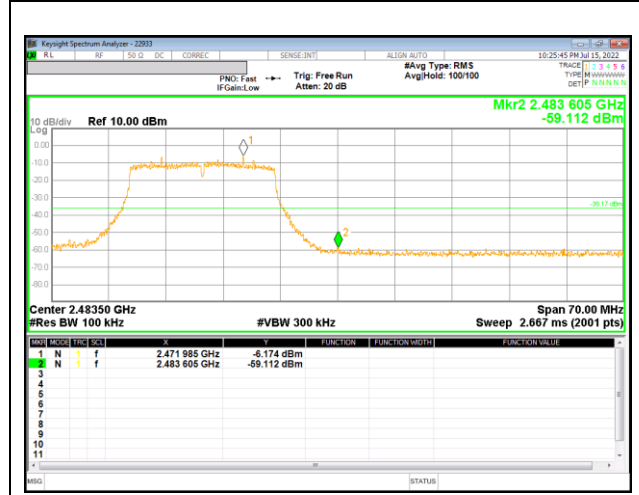


12 Channel Band-edge

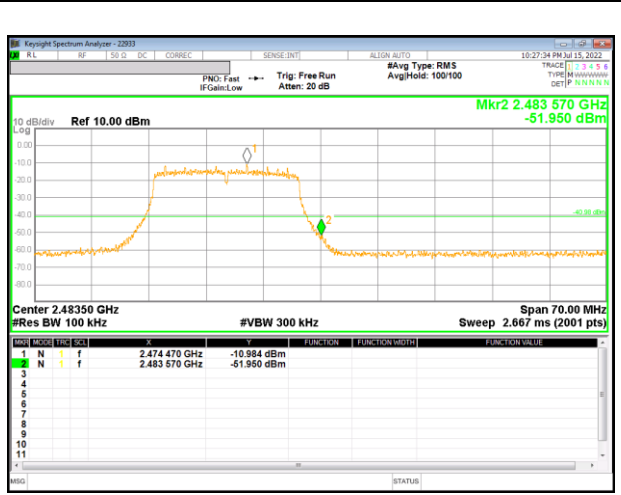

13 Channel Band-edge

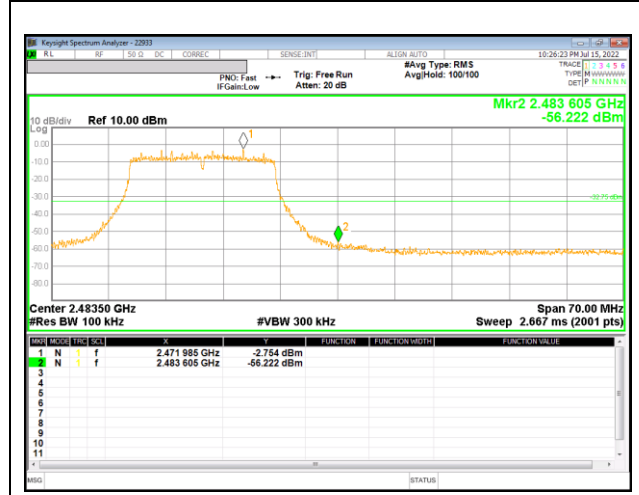

12 Channel Band-edge_SISO

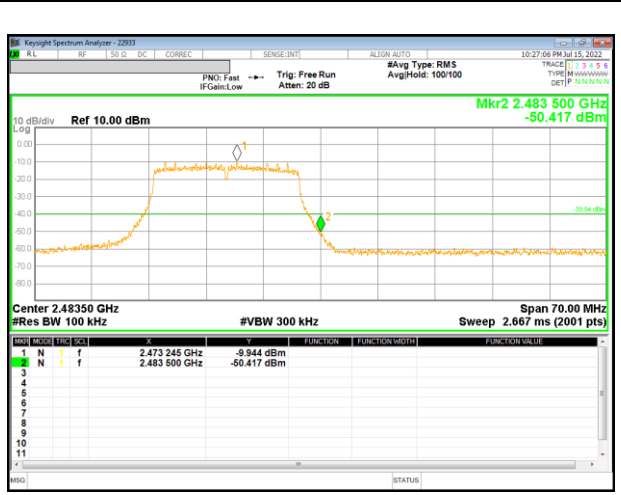


13 Channel Band-edge_SISO


9.5.4. 802.11ax HE20(SU) MODE

1TX Antenna 1




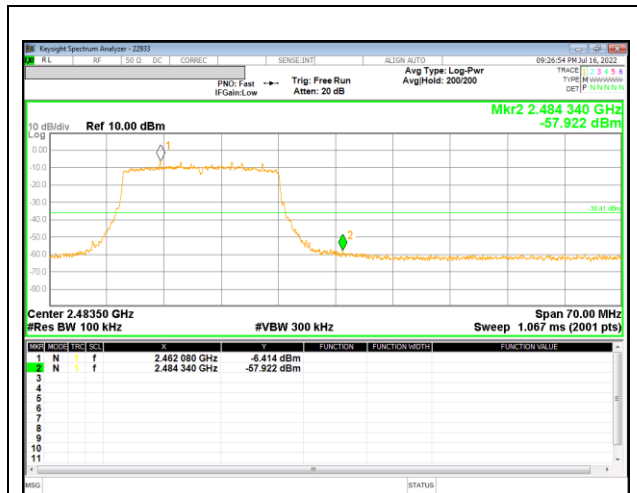


12 Channel Band-edge

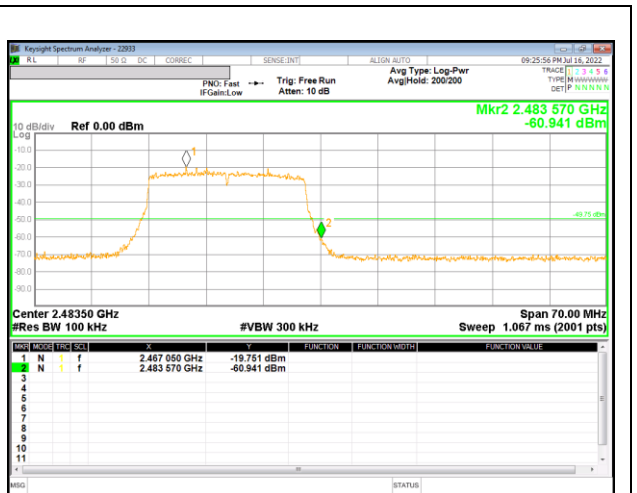

13 Channel Band-edge

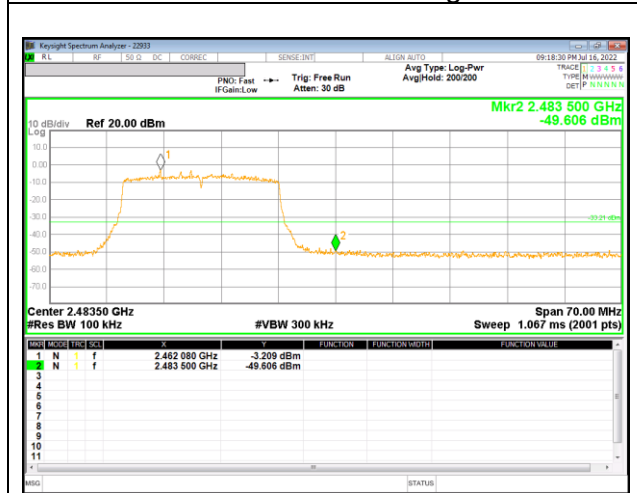

12 Channel Band-edge_SISO

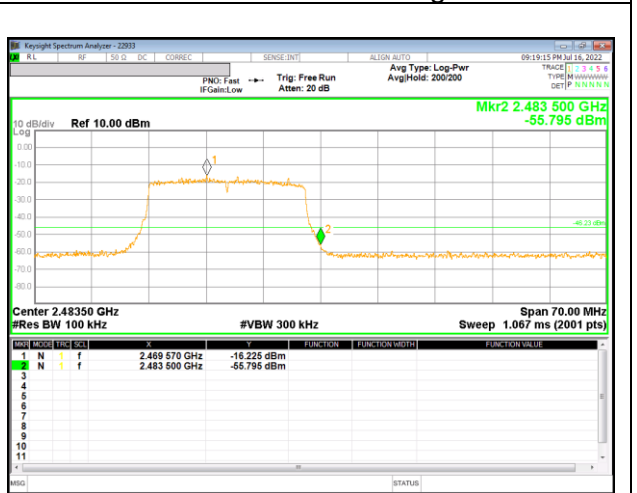

13 Channel Band-edge_SISO