

## 6.3 Output Power Measurement

§15.247(b.3)

### Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies.

***The maximum permissible conducted output power is 1 Watt.***

### Test Procedure Used

KDB 558074 v03r01 – Section 9.1.3 PKPM1 Peak Power Method (for signals with BW ≤ 50MHz)  
 KDB 558074 v03r01 – Section 9.1.2 Integrated Band Power Method (for signals with BW > 50MHz)  
 KDB 558074 v03r01 – Section 9.2.3.2 Method AVGPM-G (for signals of all BWs)  
 KDB 662911 v02r01 – Section D

### Test Settings

#### Method PKPM1 (Peak Power Measurement of Signals with DTS BW ≤ 50MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.



#### Integrated Band Power Method (Peak Power Measurement of Signals with DTS BW > 50MHz)

Since the RF power meter used only implemented a VBW of 50MHz, a signal analyzer was required to perform power measurements for signals' whose bandwidth were > 50MHz. The following settings shown in the next two sub-sections were used on a signal analyzer:

1. The signal analyzers' channel power measurement function was enabled with the integration bandwidth set to the measured DTS bandwidth
2. RBW = 1MHz
3. VBW ≥ 3 x RBW
4. Span ≥ 1.5 x DTS BW
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to fully stabilize


#### Method AVGPM-G (Average Power Measurements for Signals With Any Channel BW)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.


FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 33 of 122	

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagrams below.





**Figure 6-2. Test Instrument & Measurement Setup for Power Meter Measurements**



**Figure 6-3. Test Instrument & Measurement Setup for Signal Analyzer Measurements**

**Test Notes**

None

<b>FCC ID:</b> A3LSMT705M		<b>FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1404300884.A3L	<b>Test Dates:</b> 4/11 - 5/8/2014	<b>EUT Type:</b> Portable Tablet	Page 34 of 122	

### Antenna-1 Output Power Measurement – 802.11b/g/n (2.4GHz)

Mode	Freq [MHz]	Channel	Detector	802.11b Conducted Power [dBm]			
				Data Rate [Mbps]			
				1	2	5.5	11
802.11b	2412	1	AVG	11.85	11.93	11.93	11.95
			PEAK	15.22	15.29	15.20	15.28
802.11b	2437	6	AVG	12.13	12.27	12.35	12.19
			PEAK	15.49	15.75	15.79	15.74
802.11b	2462	11	AVG	11.79	11.96	11.97	11.99
			PEAK	15.18	15.32	15.32	15.33

**Table 6-4. 802.11b Conducted Output Power Measurements**

Mode	Freq [MHz]	Channel	Detector	802.11g Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11g	2412	1	AVG	11.12	11.12	11.13	11.12	11.39	11.33	11.44	11.25
			PEAK	17.03	17.13	17.05	16.96	18.48	18.45	18.24	18.27
802.11g	2437	6	AVG	11.45	11.35	11.40	11.35	11.45	11.48	11.41	11.40
			PEAK	17.40	17.37	17.27	16.97	18.56	18.62	18.65	18.22
802.11g	2462	11	AVG	11.29	11.27	11.25	11.26	11.38	11.45	11.46	11.40
			PEAK	17.09	17.04	16.98	16.72	18.40	18.36	18.29	17.94

**Table 6-5. 802.11g Conducted Output Power Measurements**

Mode	Freq [MHz]	Channel	Detector	802.11n (2.4GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5	13	19.5	26	39	52	58.5	65
802.11n	2412	1	AVG	10.22	10.20	10.19	10.44	10.49	10.39	10.39	10.46
			PEAK	16.29	16.26	16.20	17.61	17.81	17.70	17.71	17.50
802.11n	2437	6	AVG	10.46	10.48	10.48	10.44	10.42	10.41	10.47	10.45
			PEAK	16.65	16.76	16.74	18.05	18.14	18.01	18.05	18.16
802.11n	2462	11	AVG	10.25	10.26	10.29	10.39	10.40	10.49	10.43	10.46
			PEAK	16.33	16.27	16.20	17.73	17.71	17.67	17.55	17.67

**Table 6-6. 20MHz BW 802.11n (2.4GHz) Conducted Output Power Measurements**



### Antenna-1 Output Power Measurement – 802.11a/n/ac (5GHz)

Mode	Freq [MHz]	Channel	Detector	802.11a Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11a	5745	149	AVG	7.14	7.00	7.15	7.05	7.24	7.15	7.24	7.04
			PEAK	13.10	12.99	13.09	12.72	14.40	14.54	14.29	14.14
802.11a	5765	153	AVG	7.29	7.26	7.19	7.17	7.47	7.23	7.43	7.21
			PEAK	13.19	13.19	13.10	12.86	14.70	14.58	14.60	14.21
802.11a	5785	157	AVG	7.35	7.39	7.39	7.28	7.50	7.42	7.47	7.37
			PEAK	13.25	13.50	13.34	12.97	14.91	14.89	14.48	14.38
802.11a	5805	161	AVG	7.17	7.26	7.25	7.10	7.44	7.28	7.38	7.11
			PEAK	13.14	13.25	13.13	12.76	14.70	14.84	14.55	14.22
802.11a	5825	165	AVG	7.05	6.98	7.05	7.05	7.35	7.26	7.25	7.11
			PEAK	12.99	12.89	12.94	12.60	14.57	14.60	14.33	14.00

**Table 6-7. 802.11a Conducted Output Power Measurements**

Mode	Freq [MHz]	Channel	Detector	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5	13	19.5	26	39	52	58.5	65
802.11n	5745	149	AVG	7.09	7.09	7.19	7.25	7.31	7.28	7.43	7.37
			PEAK	12.68	12.72	12.65	14.31	14.09	14.72	14.67	14.74
802.11n	5765	153	AVG	7.01	6.96	7.00	7.28	7.26	7.19	7.22	7.24
			PEAK	12.62	12.61	12.69	14.22	13.99	14.84	14.65	14.65
802.11n	5785	157	AVG	6.94	6.77	6.79	6.88	7.06	6.99	7.02	7.10
			PEAK	12.60	12.43	12.49	13.87	14.20	14.82	14.71	14.50
802.11n	5805	161	AVG	6.89	6.79	6.86	7.11	7.11	7.20	7.20	7.14
			PEAK	12.42	12.30	12.33	13.75	13.84	14.40	14.54	14.38
802.11n	5825	165	AVG	6.84	7.00	6.84	7.19	7.26	7.31	7.21	7.30
			PEAK	12.44	12.67	12.61	14.27	14.35	14.96	14.57	14.91

**Table 6-8. 20MHz BW 802.11n (5GHz) Conducted Output Power Measurements**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 36 of 122

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				13.5	27	40.5	54	81	108	121.5	135
802.11n	5755	151	AVG	7.35	7.40	7.39	7.45	7.48	7.54	7.58	7.42
			PEAK	11.32	11.39	11.37	12.81	12.83	13.23	13.24	12.89
802.11n	5795	159	AVG	7.31	7.36	7.40	7.43	7.50	7.54	7.55	7.55
			PEAK	11.05	10.91	11.00	12.22	12.23	12.61	12.85	12.93

**Table 6-9. 40MHz BW 802.11n (5GHz) Conducted Output Power Measurements**

20MHz BW 802.11ac (5GHz) Conducted Power [dBm]				
Mode	Freq [MHz]	Channel	Detector	Data Rate
				6.5 Mbps
802.11ac	5745	149	AVG	7.23
			PEAK	12.10
802.11ac	5785	157	AVG	7.22
			PEAK	11.93
802.11ac	5825	165	AVG	7.12
			PEAK	12.12



**Table 6-10. 20MHz BW 802.11ac (5GHz) Conducted Output Power Measurements**

40MHz BW 802.11ac (5GHz) Conducted Power [dBm]				
Mode	Freq [MHz]	Channel	Detector	Data Rate
				13.5 Mbps
802.11ac	5755	151	AVG	7.32
			PEAK	12.24
802.11ac	5795	159	AVG	7.30
			PEAK	12.29

**Table 6-11. 40MHz BW 802.11ac (5GHz) Conducted Output Power Measurements**

Mode	Freq [MHz]	Channel	Detector	80MHz BW 802.11ac (5GHz) Conducted Power [dBm]									
				Data Rate [Mbps]									
				29.3	58.5	87.8	117	175.5	234	263.3	292.5	351	390
802.11ac	5775	155	AVG	6.88	6.66	6.69	7.02	7.05	7.00	7.05	7.11	6.69	7.09
			PEAK	11.10	11.12	11.67	12.87	13.07	13.26	13.38	13.30	13.06	14.07

**Table 6-12. 80MHz BW 802.11ac (5GHz) Conducted Output Power Measurements**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 37 of 122

### Antenna-2 Output Power Measurement – 802.11b/g/n (2.4GHz)

Mode	Freq [MHz]	Channel	Detector	802.11b Conducted Power [dBm]			
				Data Rate [Mbps]			
				1	2	5.5	11
802.11b	2412	1	AVG	11.88	12.10	12.11	12.12
			PEAK	15.00	15.16	15.20	15.20
802.11b	2437	6	AVG	12.35	12.44	12.41	12.42
			PEAK	15.54	15.70	15.66	15.63
802.11b	2462	11	AVG	11.30	11.68	11.64	11.66
			PEAK	14.49	14.75	14.73	14.71



**Table 6-13. 802.11b Conducted Output Power Measurements**

Mode	Freq [MHz]	Channel	Detector	802.11g Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11g	2412	1	AVG	10.33	10.29	10.34	10.37	10.61	10.61	10.51	10.60
			PEAK	15.76	15.95	15.78	15.65	16.92	16.90	16.89	16.94
802.11g	2437	6	AVG	11.05	11.15	10.97	11.11	11.27	11.28	11.22	11.28
			PEAK	16.33	16.44	16.18	16.12	17.51	17.39	17.57	17.58
802.11g	2462	11	AVG	10.05	10.08	10.08	10.11	10.34	10.36	10.15	10.29
			PEAK	15.61	15.48	15.50	15.25	16.71	16.39	16.68	16.48

**Table 6-14. 802.11g Conducted Output Power Measurements**

Mode	Freq [MHz]	Channel	Detector	802.11n (2.4GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5	13	19.5	26	39	52	58.5	65
802.11n	2412	1	AVG	9.00	9.01	9.05	9.28	9.26	9.21	9.27	9.30
			PEAK	14.37	14.65	14.45	15.88	15.87	15.89	15.86	15.96
802.11n	2437	6	AVG	9.59	9.56	9.63	9.84	9.88	9.88	9.80	10.01
			PEAK	14.72	14.93	14.71	15.91	16.31	16.29	16.36	16.19
802.11n	2462	11	AVG	8.66	8.64	8.60	8.96	8.83	8.91	8.76	8.79
			PEAK	13.87	13.99	13.85	15.19	15.20	15.12	15.27	14.84

**Table 6-15. 20MHz BW 802.11n (2.4GHz) Conducted Output Power Measurements**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 38 of 122	



## Antenna-2 Output Power Measurement – 802.11a/n (5GHz)

Mode	Freq [MHz]	Channel	Detector	802.11a Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11a	5745	149	AVG	7.22	7.30	7.23	7.25	7.52	7.50	7.54	7.52
			PEAK	12.63	12.63	12.55	12.28	13.83	13.74	14.68	14.04
802.11a	5765	153	AVG	7.16	6.88	6.84	6.85	7.22	7.21	7.28	7.32
			PEAK	12.46	12.46	12.19	11.99	13.54	13.50	14.15	13.78
802.11a	5785	157	AVG	7.22	7.09	7.09	7.08	7.43	7.46	7.32	7.44
			PEAK	12.48	12.41	12.26	12.03	13.66	13.60	14.09	13.83
802.11a	5805	161	AVG	7.21	7.26	7.23	7.27	7.56	7.50	7.47	7.53
			PEAK	12.39	12.46	12.25	12.03	13.64	13.69	13.98	13.71
802.11a	5825	165	AVG	7.35	7.21	7.20	7.16	7.57	7.44	7.50	7.51
			PEAK	12.46	12.47	12.41	12.08	13.65	13.70	14.23	13.79

Table 6-16. 802.11a Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5	13	19.5	26	39	52	58.5	65
802.11n	5745	149	AVG	6.94	6.93	7.01	7.29	7.13	7.42	7.41	7.40
			PEAK	11.70	11.95	11.76	13.11	13.15	13.82	13.86	14.01
802.11n	5765	153	AVG	7.02	7.07	7.17	7.38	7.35	7.52	7.46	7.52
			PEAK	11.93	12.11	12.10	13.31	13.54	14.24	14.22	13.92
802.11n	5785	157	AVG	6.95	7.00	6.89	6.98	7.19	7.25	7.29	7.21
			PEAK	11.83	12.01	11.74	12.95	13.21	13.75	14.11	13.65
802.11n	5805	161	AVG	6.91	6.90	7.00	7.21	7.29	7.40	7.28	7.28
			PEAK	11.80	12.08	11.93	13.22	13.38	14.05	13.96	13.80
802.11n	5825	165	AVG	6.92	6.84	6.90	7.12	7.16	7.35	7.28	7.27
			PEAK	11.7	11.772	11.65	12.59	13.02	14.08	13.83	13.84

Table 6-17. 20MHz BW 802.11n (5GHz) Conducted Output Power Measurements

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 39 of 122

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				13.5	27	40.5	54	81	108	121.5	135
802.11n	5755	151	AVG	6.05	6.12	6.13	6.10	6.11	6.18	6.40	6.20
			PEAK	11.41	11.51	11.43	12.67	12.54	13.12	13.39	13.10
802.11n	5795	159	AVG	6.03	6.06	6.01	6.14	6.18	6.27	6.39	6.34
			PEAK	11.43	11.27	11.36	12.85	12.63	13.17	13.28	13.38

**Table 6-18. 40MHz BW 802.11n (5GHz) Conducted Output Power Measurements**

20MHz BW 802.11ac (5GHz) Conducted Power [dBm]				
Mode	Freq [MHz]	Channel	Detector	Data Rate
				6.5 Mbps
802.11ac	5745	149	AVG	6.99
			PEAK	11.81
802.11ac	5785	157	AVG	6.85
			PEAK	11.69
802.11ac	5825	165	AVG	6.71
			PEAK	11.55



**Table 6-19. 20MHz BW 802.11ac (5GHz) Conducted Output Power Measurements**

40MHz BW 802.11ac (5GHz) Conducted Power [dBm]				
Mode	Freq [MHz]	Channel	Detector	Data Rate
				13.5 Mbps
802.11ac	5755	151	AVG	6.04
			PEAK	11.45
802.11ac	5795	159	AVG	6.02
			PEAK	11.41

**Table 6-20. 40MHz BW 802.11ac (5GHz) Conducted Output Power Measurements**

Mode	Freq [MHz]	Channel	Detector	80MHz BW 802.11ac (5GHz) Conducted Power [dBm]									
				Data Rate [Mbps]									
				29.3	58.5	87.8	117	175.5	234	263.3	292.5	351	390
802.11ac	5775	155	AVG	6.22	6.11	6.28	6.33	6.42	6.43	6.34	6.40	6.46	6.39
			PEAK	11.11	11.12	11.09	12.36	12.44	13.12	13.02	12.82	13.14	13.00

**Table 6-21. 80MHz BW 802.11ac (5GHz) Conducted Output Power Measurements**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 40 of 122

## MIMO Output Power Measurement – 802.11n (2.4GHz, 5GHz)

### Sample MIMO Calculation:

At 2462MHz MCS8 the average conducted output power was measured to be 6.54 dBm for Antenna-1 and 7.31 dBm for Antenna-2. The measured values were summed in linear power units then converted back to DBm:

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(6.54 \text{ dBm} + 7.31 \text{ dBm}) = (4.508 \text{ mW} + 5.383 \text{ mW}) = 9.891 \text{ mW} = 9.95 \text{ dBm}$$

Mode	Freq [MHz]	Channel	Detector	MCS8		
				ANT1	ANT2	MIMO
802.11n	2412	1	AVG	7.26	7.09	10.19
			PEAK	13.18	13.17	16.19
802.11n	2437	6	AVG	7.44	7.45	10.46
			PEAK	13.45	13.42	16.45
802.11n	2462	11	AVG	6.54	7.31	9.95
			PEAK	12.60	13.15	15.89



Table 6-22. 20MHz BW 802.11n (2.4GHz) Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	MCS8		
				ANT1	ANT2	MIMO
802.11n	5745	149	AVG	5.61	4.08	7.92
			PEAK	10.02	9.69	12.87
802.11n	5765	153	AVG	5.75	3.79	7.89
			PEAK	10.43	9.05	12.80
802.11n	5785	157	AVG	5.52	4.11	7.88
			PEAK	10.55	10.12	13.35
802.11n	5805	161	AVG	5.74	3.82	7.90
			PEAK	10.54	9.89	13.24
802.11n	5825	165	AVG	5.64	4.16	7.97
			PEAK	10.62	9.80	13.24

Table 6-23. 20MHz BW 802.11n (5GHz) Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	MCS8		
				ANT1	ANT2	MIMO
802.11n	5755	151	AVG	5.50	4.04	7.84
			PEAK	9.78	10.19	13.00
802.11n	5795	159	AVG	5.33	4.00	7.73
			PEAK	9.72	10.10	12.92

Table 6-24. 40MHz BW 802.11n (5GHz) Conducted Output Power Measurements

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 41 of 122

20MHz BW 802.11ac (5GHz) Conducted Power [dBm]						
Mode	Freq [MHz]	Channel	Detector	MCS8		
				ANT1	ANT2	MIMO
802.11ac	5745	149	AVG	4.72	3.32	7.09
			PEAK	9.81	11.64	13.83
802.11ac	5785	157	AVG	5.12	3.46	7.38
			PEAK	9.89	11.78	13.95
802.11ac	5825	165	AVG	4.65	3.96	7.33
			PEAK	9.45	12.34	14.14



**Table 6-25. 20MHz BW 802.11ac (5GHz) Conducted Output Power Measurements**

40MHz BW 802.11ac (5GHz) Conducted Power [dBm]						
Mode	Freq [MHz]	Channel	Detector	MCS8		
				ANT1	ANT2	MIMO
802.11ac	5755	151	AVG	4.82	3.44	7.19
			PEAK	10.15	12.57	14.54
802.11ac	5795	159	AVG	4.51	3.40	7.00
			PEAK	10.15	12.66	14.59

**Table 6-26. 40MHz BW 802.11ac (5GHz) Conducted Output Power Measurements**

Mode	Freq [MHz]	Channel	Detector	MCS8		
				ANT1	ANT2	MIMO
802.11ac	5775	155	AVG	4.02	4.24	7.14
			PEAK	11.23	12.22	14.76

**Table 6-27. 80MHz BW 802.11ac (5GHz) Conducted Output Power Measurements**

<b>FCC ID:</b> A3LSMT705M		<b>FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1404300884.A3L	<b>Test Dates:</b> 4/11 - 5/8/2014	<b>EUT Type:</b> Portable Tablet		Page 42 of 122

## 6.4 Power Spectral Density (802.11a/b/g/n/ac) §15.247(e)

### Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

*The maximum permissible power spectral density is 8 dBm in any 3 kHz band.*

### Test Procedure Used


KDB 558074 v03r01 – Section 10.2 Method PKPSD

### Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 10kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

### Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-4. Test Instrument & Measurement Setup**

### Test Notes



None


FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 43 of 122	

## Antenna-1 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	-4.90	8.00	-12.90	Pass
2437	6	b	1	-5.19	8.00	-13.19	Pass
2462	11	b	1	-5.18	8.00	-13.18	Pass
2412	1	g	6	-8.79	8.00	-16.79	Pass
2437	6	g	6	-8.79	8.00	-16.79	Pass
2462	11	g	6	-8.05	8.00	-16.05	Pass
2412	1	n	6.5/7.2 (MCS0)	-9.63	8.00	-17.63	Pass
2437	6	n	6.5/7.2 (MCS0)	-8.19	8.00	-16.19	Pass
2462	11	n	6.5/7.2 (MCS0)	-7.38	8.00	-15.38	Pass
5745	149	a	6	-14.47	8.00	-22.47	Pass
5785	157	a	6	-13.73	8.00	-21.73	Pass
5825	165	a	6	-14.59	8.00	-22.59	Pass
5745	149	n (20MHz)	6.5/7.2 (MCS0)	-13.01	8.00	-21.01	Pass
5785	157	n (20MHz)	6.5/7.2 (MCS0)	-13.38	8.00	-21.38	Pass
5825	165	n (20MHz)	6.5/7.2 (MCS0)	-12.76	8.00	-20.76	Pass
5755	151	n (40MHz)	13.5/15 (MCS0)	-14.59	8.00	-22.59	Pass
5795	159	n (40MHz)	13.5/15 (MCS0)	-16.21	8.00	-24.21	Pass
5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-19.48	8.00	-27.48	Pass

**Table 6-28. Conducted Power Density Measurements**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 44 of 122	

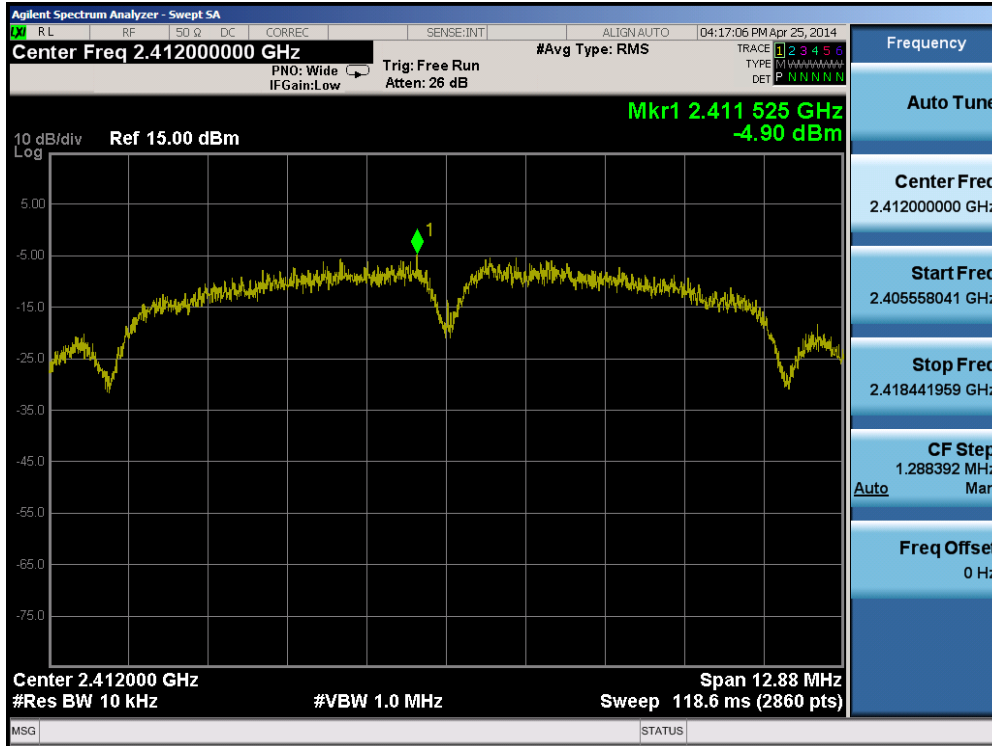

Plot 6-37. Power Spectral Density Plot (802.11b – Ch. 1)

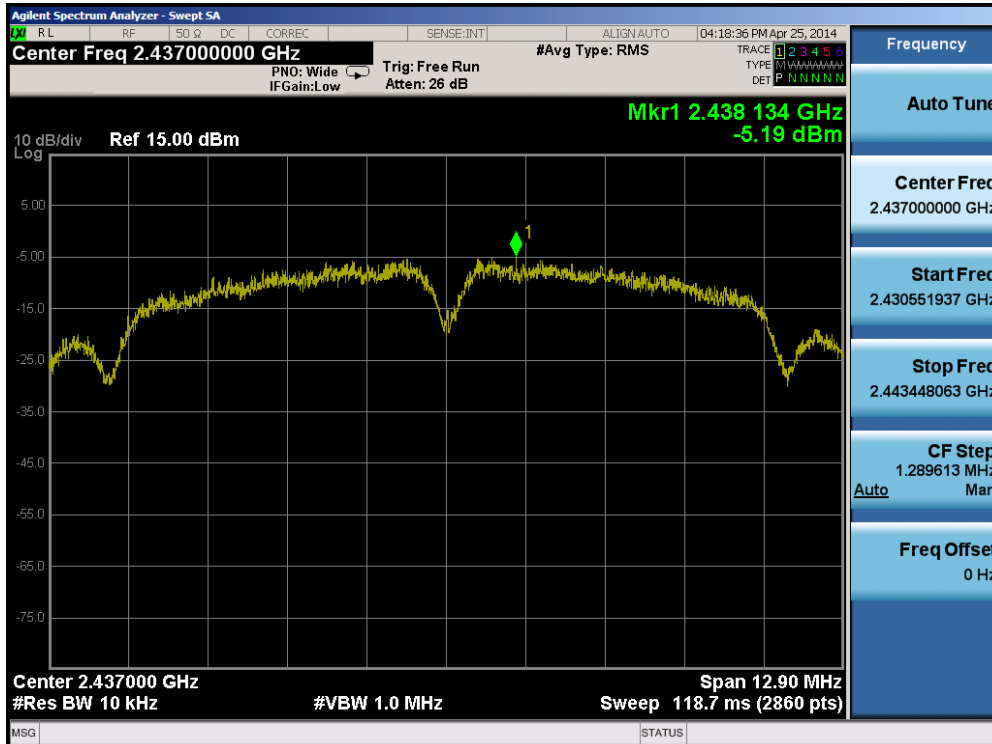


Plot 6-38. Power Spectral Density Plot (802.11b – Ch. 6)



FCC ID: A3LSMT705M	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 45 of 122

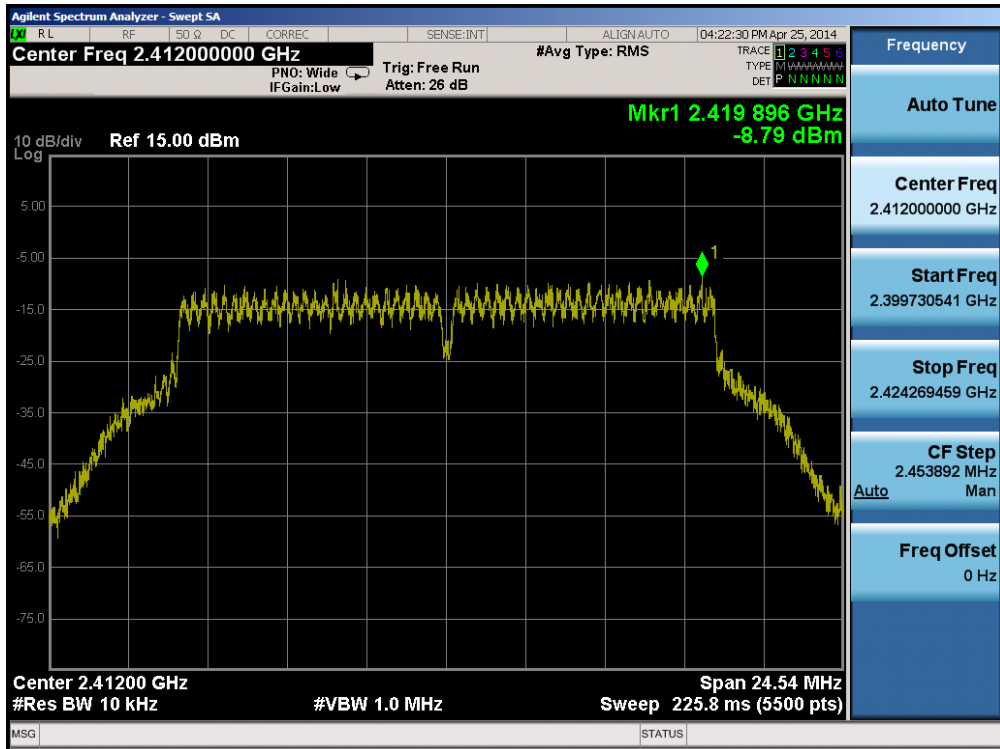


Plot 6-39. Power Spectral Density Plot (802.11b – Ch. 11)




Plot 6-40. Power Spectral Density Plot (802.11g – Ch. 1)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 46 of 122

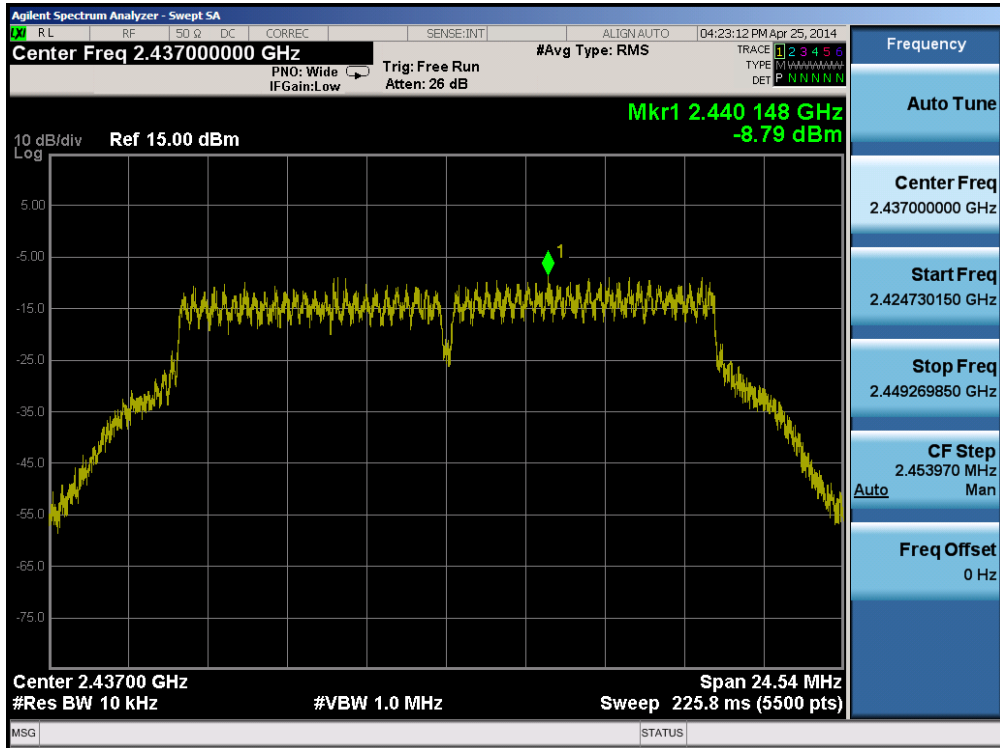


Plot 6-41. Power Spectral Density Plot (802.11g – Ch. 6)

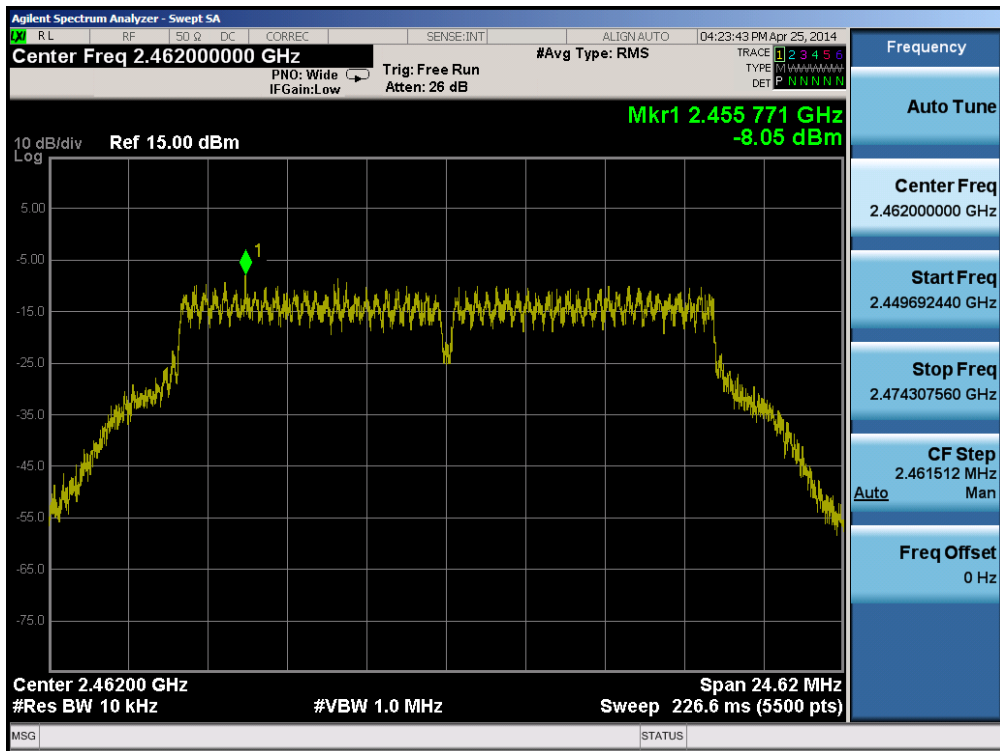


Plot 6-42. Power Spectral Density Plot (802.11g – Ch. 11)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 47 of 122

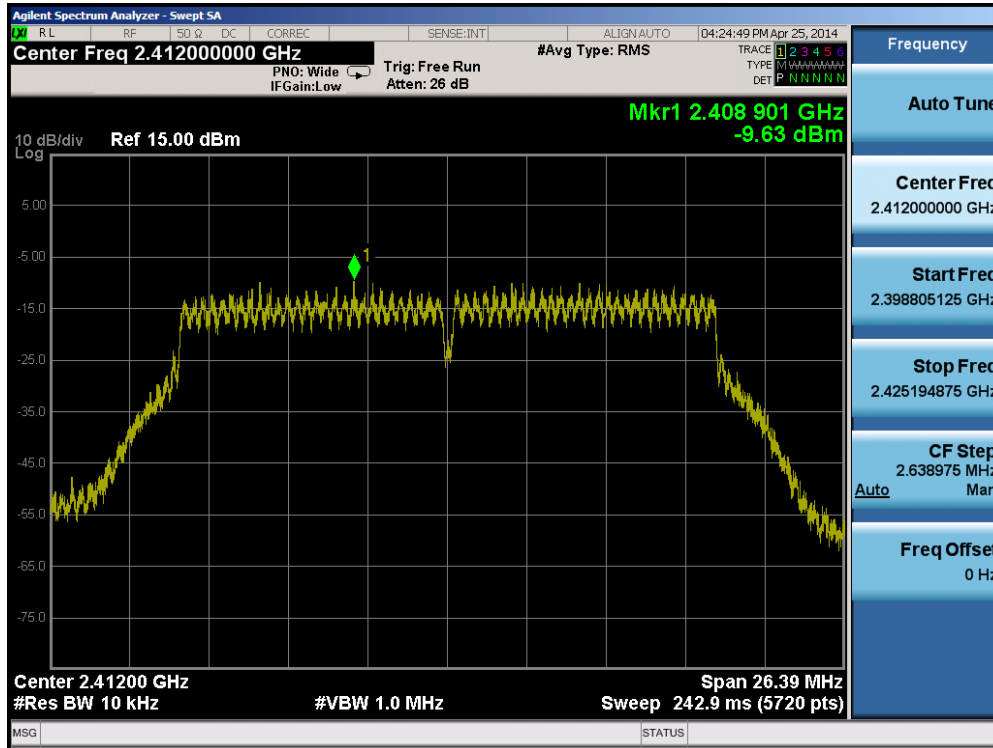


Plot 6-43. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 1)

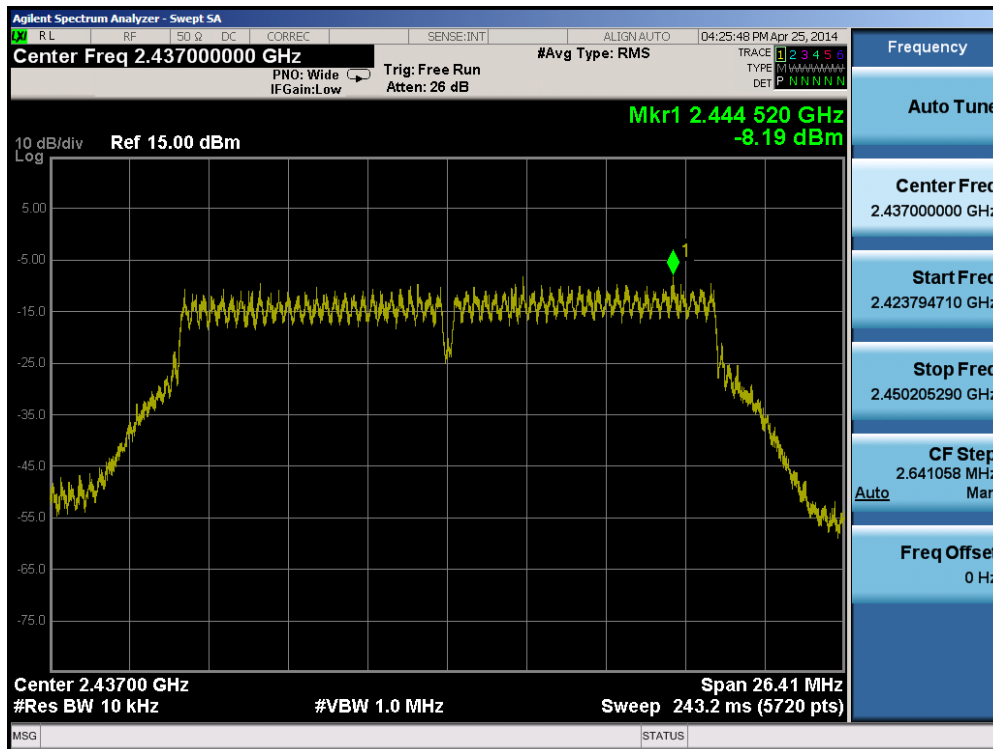


Plot 6-44. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 48 of 122

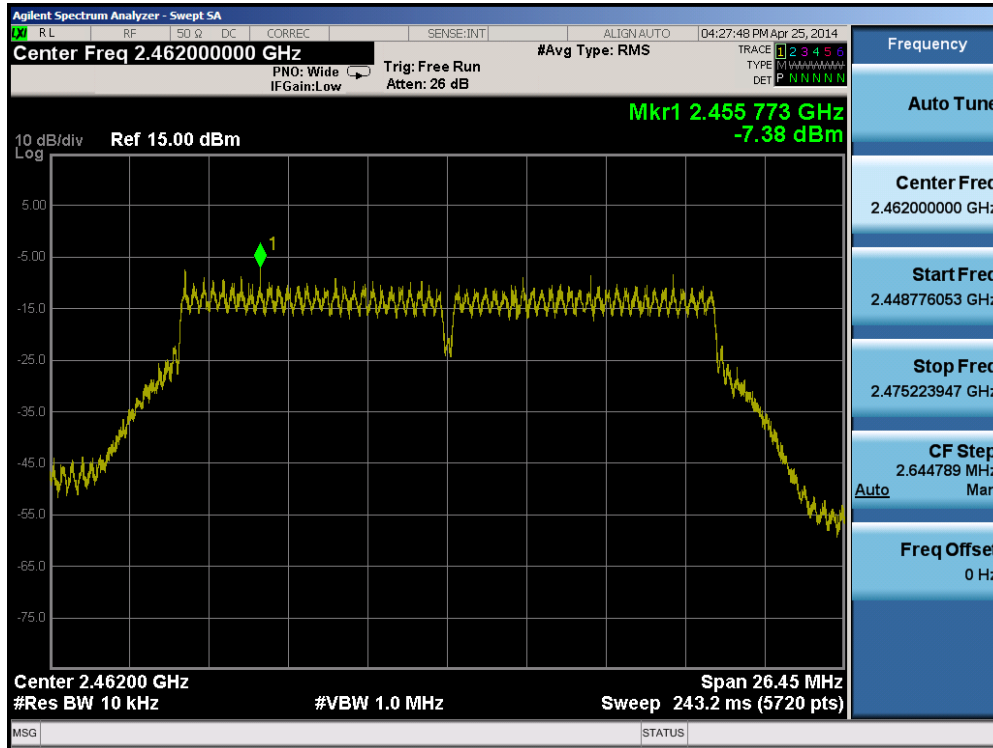


Plot 6-45. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 11)

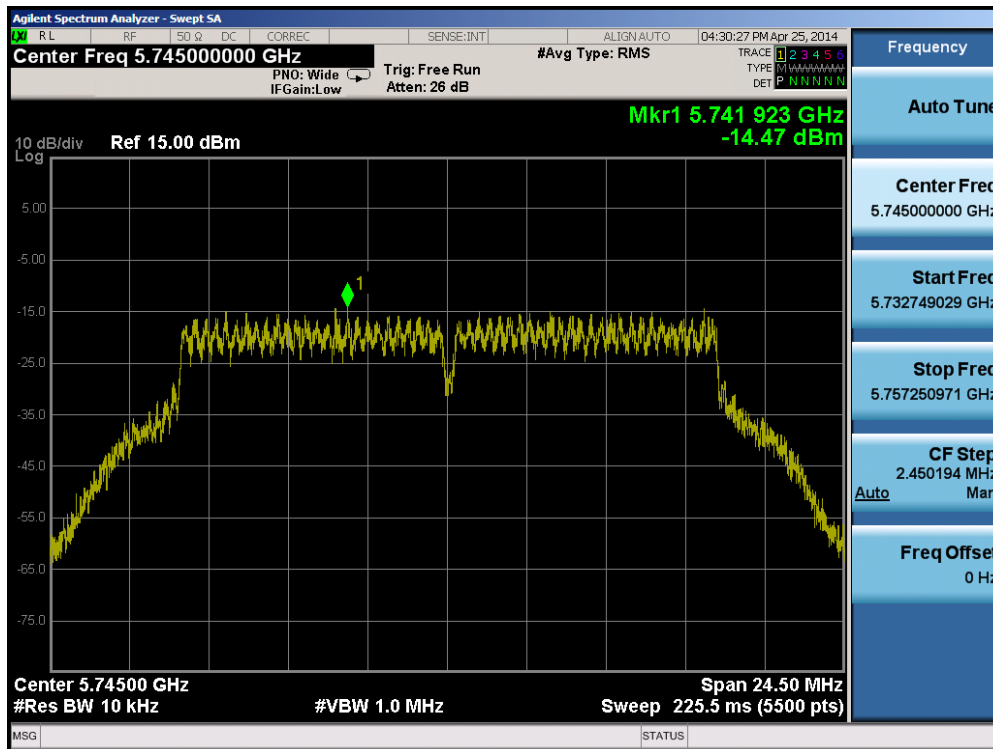


Plot 6-46. Power Spectral Density Plot (802.11a – Ch. 149)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 49 of 122

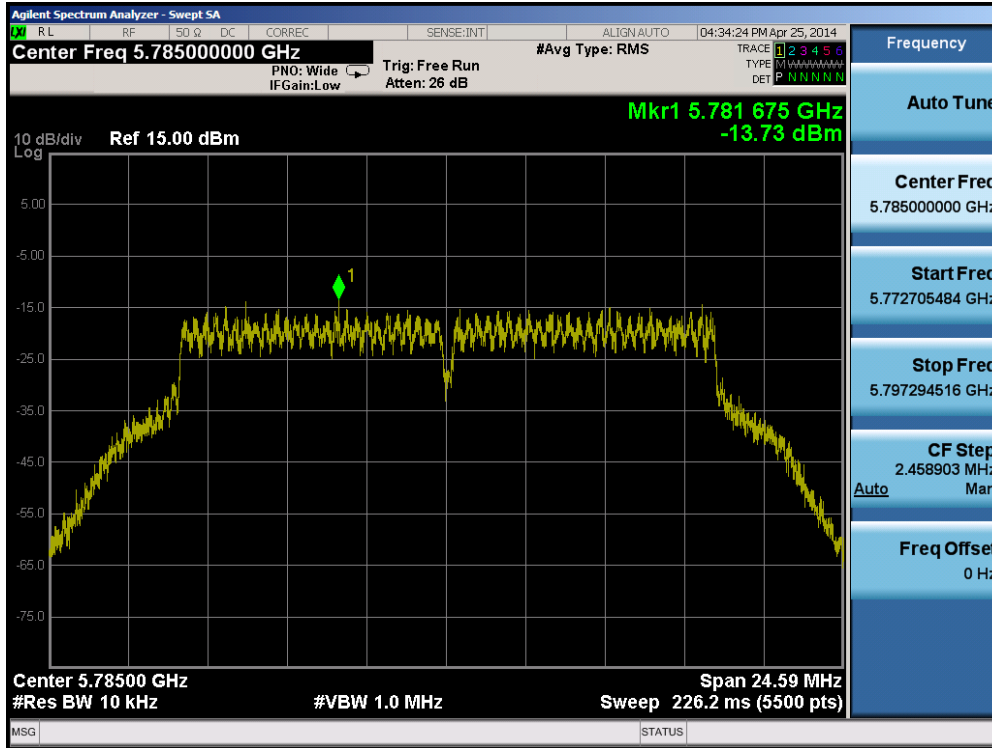


Plot 6-47. Power Spectral Density Plot (802.11a – Ch. 157)

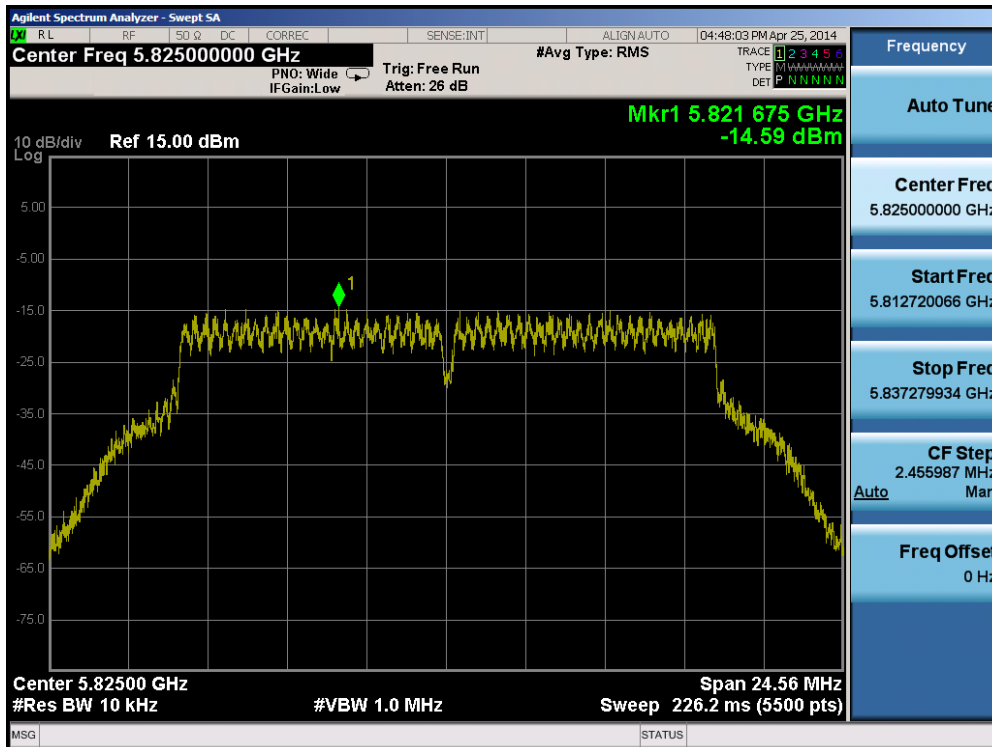


Plot 6-48. Power Spectral Density Plot (802.11a – Ch. 165)

FCC ID: A3LSMT705M	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 50 of 122

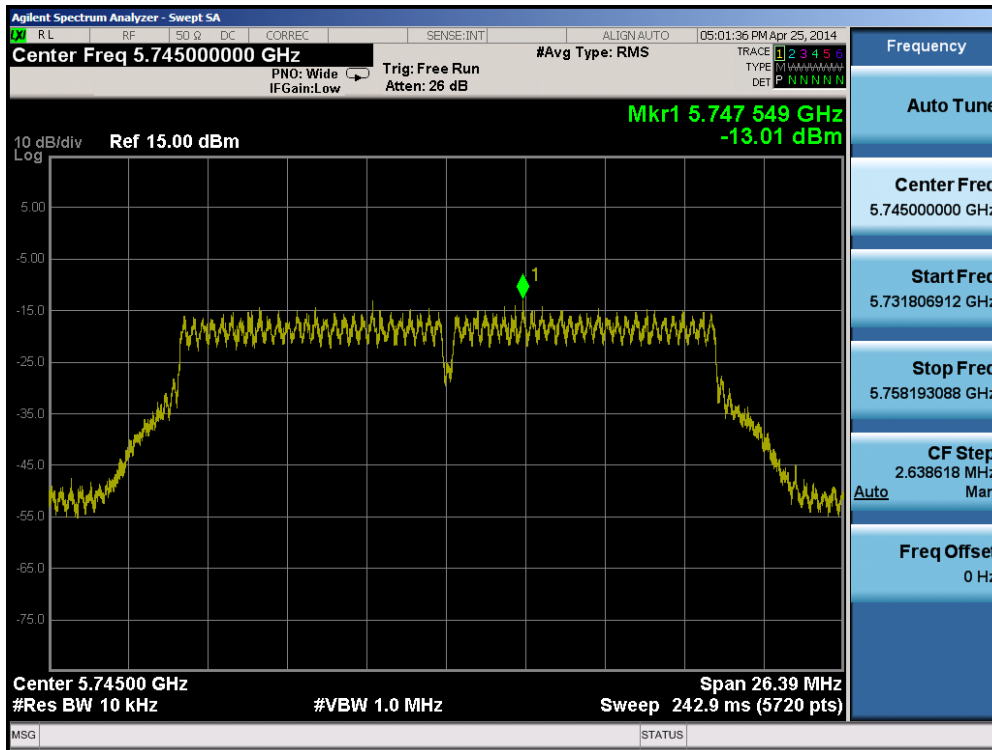


Plot 6-49. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

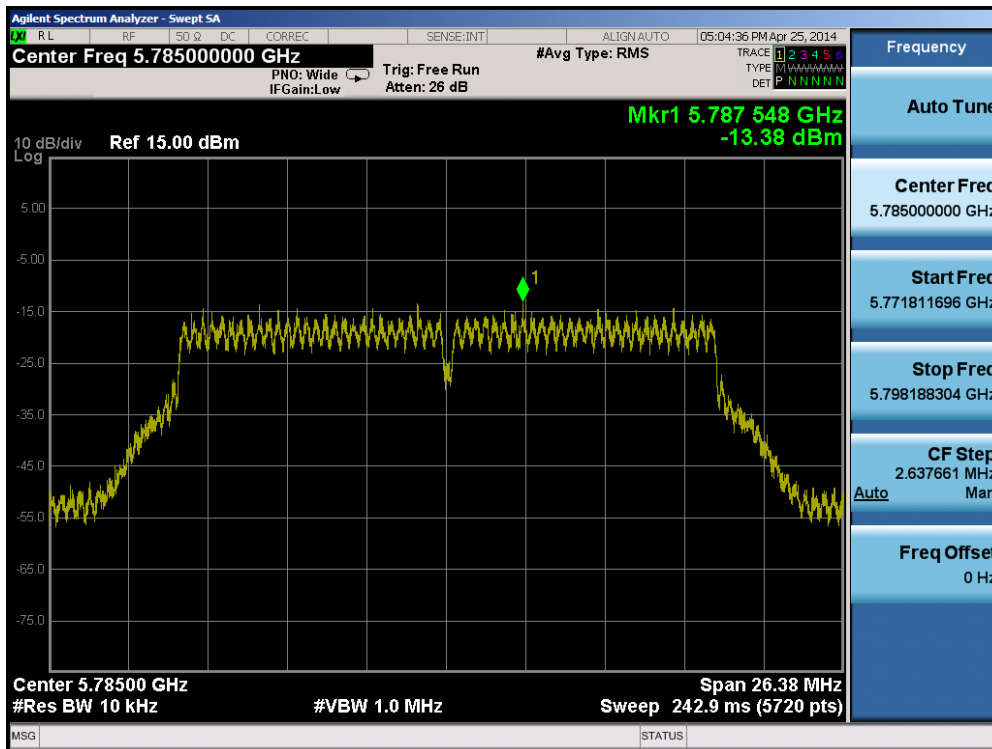


Plot 6-50. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 157)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 51 of 122

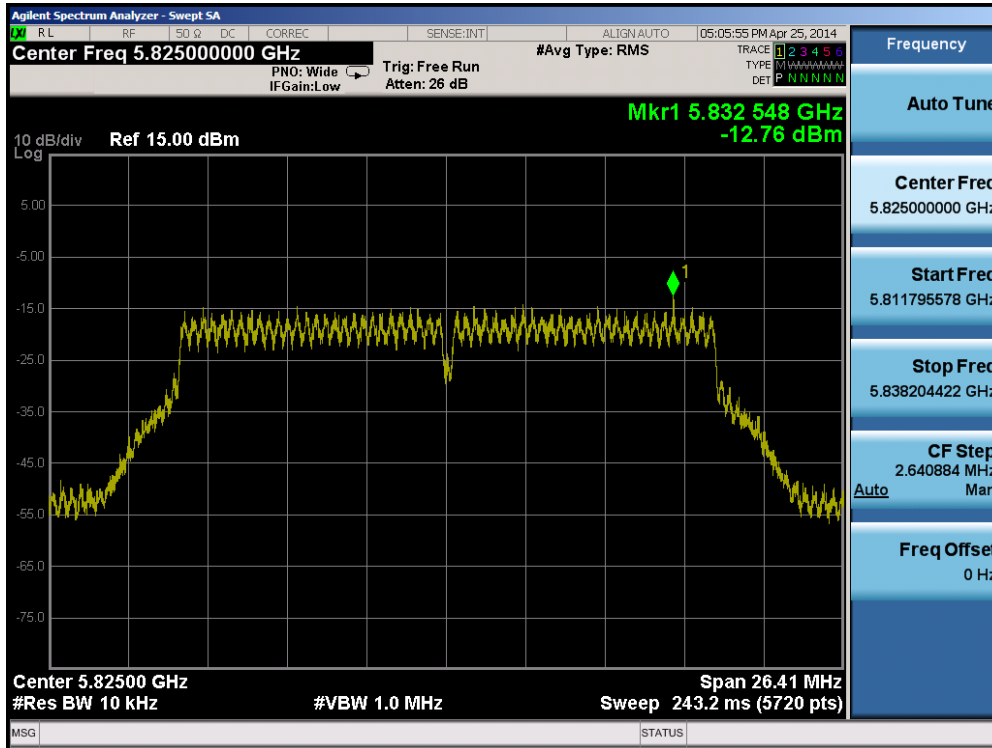


Plot 6-51. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

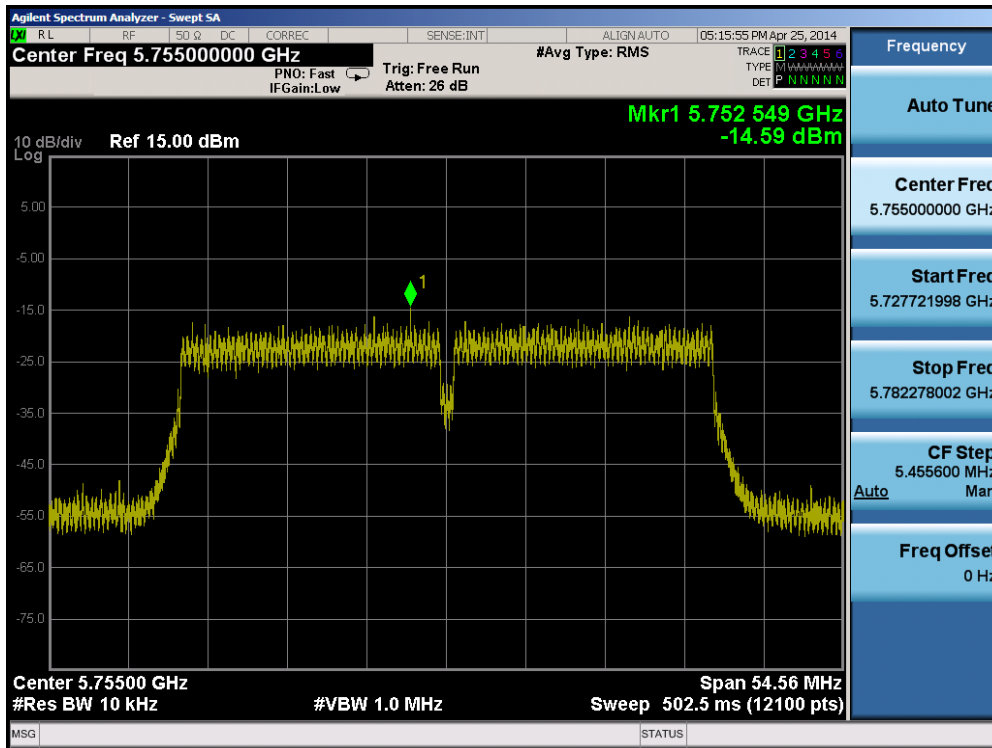




Plot 6-52. Power Spectral Density Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

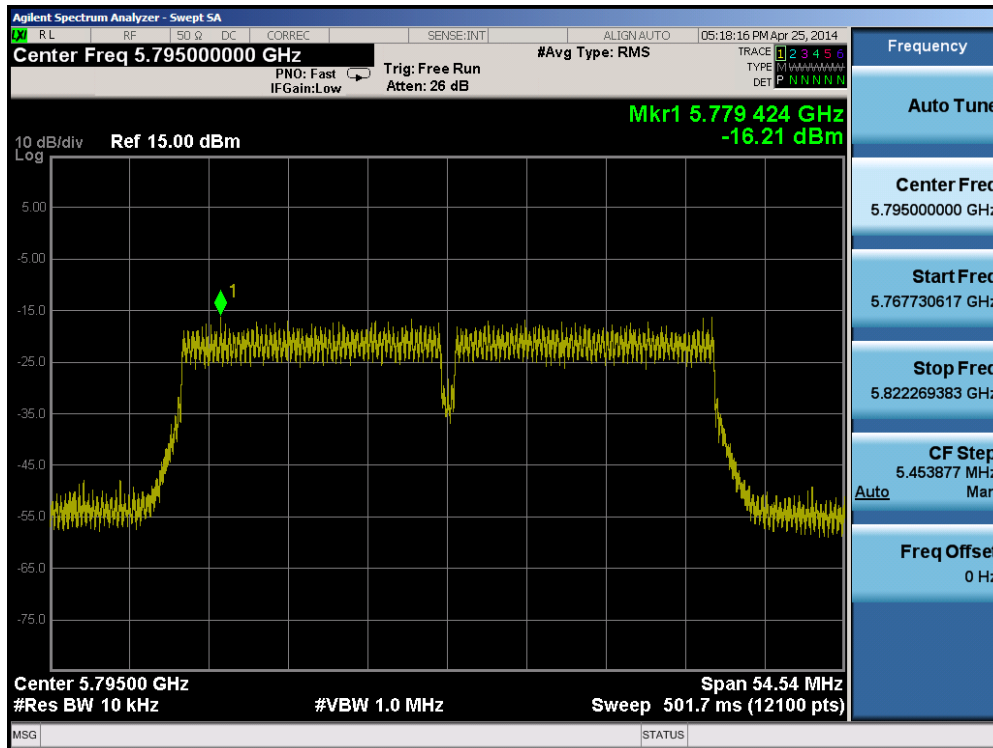FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 52 of 122





**Plot 6-53. Power Spectral Density Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)**

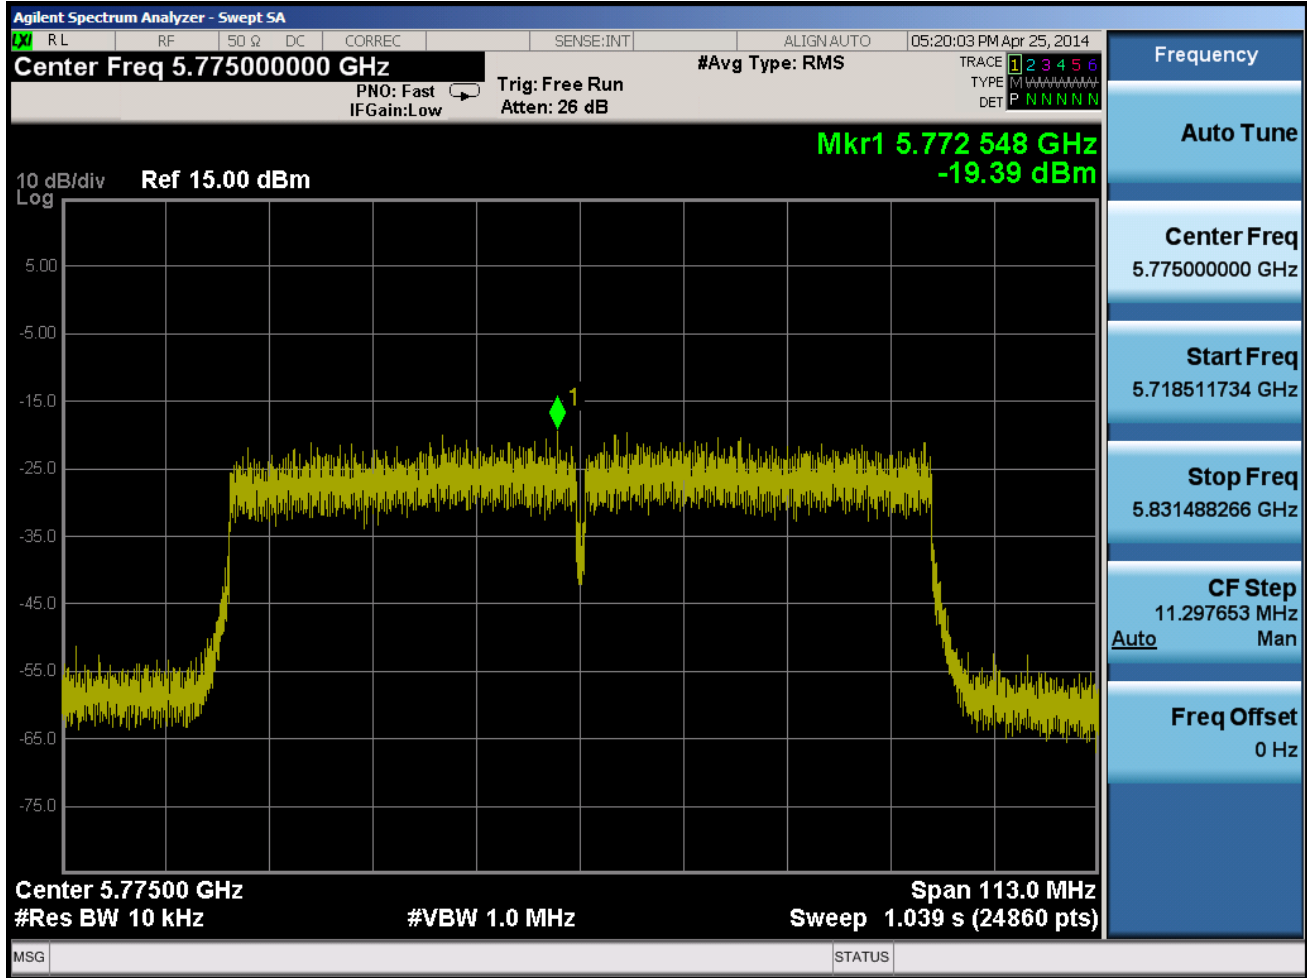FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 53 of 122





Plot 6-54. Power Spectral Density Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)


FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 54 of 122

## Antenna-2 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	-5.78	8.00	-13.78	Pass
2437	6	b	1	-4.04	8.00	-12.04	Pass
2462	11	b	1	-5.39	8.00	-13.39	Pass
2412	1	g	6	-8.64	8.00	-16.64	Pass
2437	6	g	6	-8.70	8.00	-16.70	Pass
2462	11	g	6	-9.89	8.00	-17.89	Pass
2412	1	n	6.5/7.2 (MCS0)	-10.34	8.00	-18.34	Pass
2437	6	n	6.5/7.2 (MCS0)	-9.98	8.00	-17.98	Pass
2462	11	n	6.5/7.2 (MCS0)	-10.38	8.00	-18.38	Pass
5745	149	a	6	-13.95	8.00	-21.95	Pass
5785	157	a	6	-13.11	8.00	-21.11	Pass
5825	165	a	6	-13.11	8.00	-21.11	Pass
5745	149	n (20MHz)	6.5/7.2 (MCS0)	-12.83	8.00	-20.83	Pass
5785	157	n (20MHz)	6.5/7.2 (MCS0)	-13.79	8.00	-21.79	Pass
5825	165	n (20MHz)	6.5/7.2 (MCS0)	-13.13	8.00	-21.13	Pass
5755	151	n (40MHz)	13.5/15 (MCS0)	-17.35	8.00	-25.35	Pass
5795	159	n (40MHz)	13.5/15 (MCS0)	-16.88	8.00	-24.88	Pass
5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-19.19	8.00	-27.19	Pass

Table 6-29. Conducted Power Density Measurements

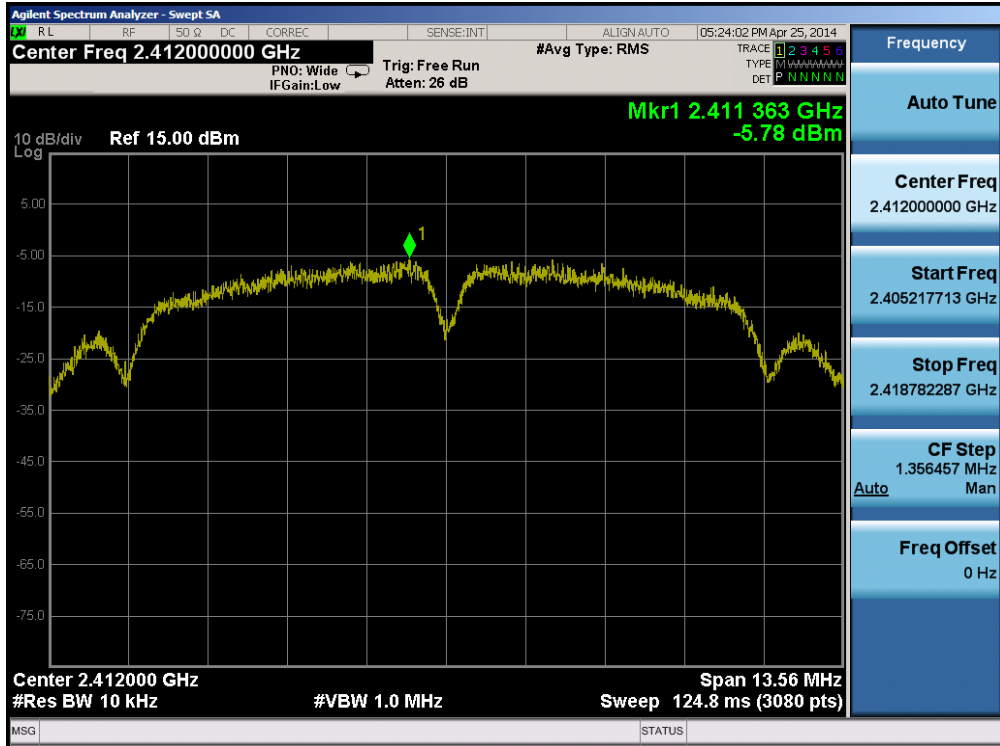

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 55 of 122	

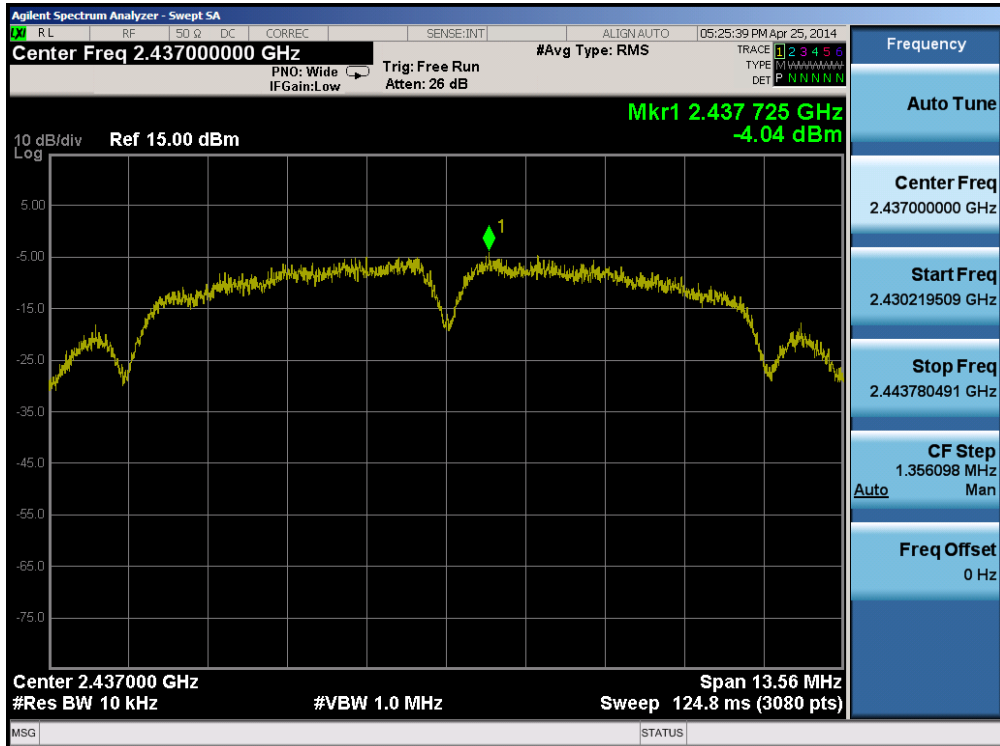


Plot 6-55. Power Spectral Density Plot (802.11b – Ch. 1)




Plot 6-56. Power Spectral Density Plot (802.11b – Ch. 6)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 56 of 122

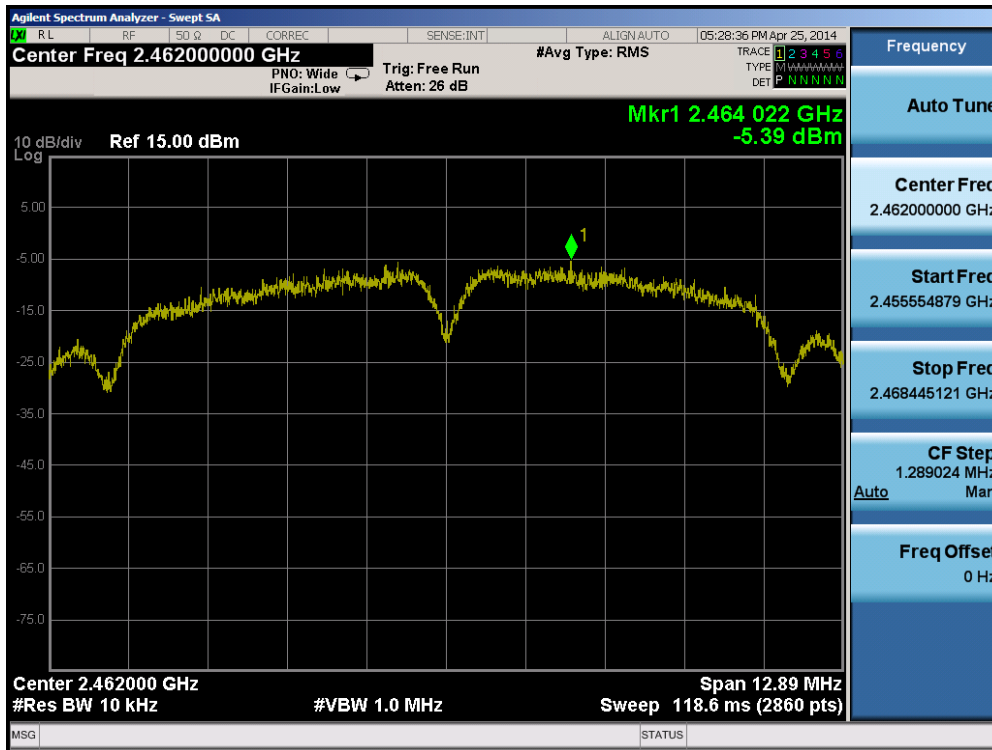


Plot 6-57. Power Spectral Density Plot (802.11b – Ch. 11)

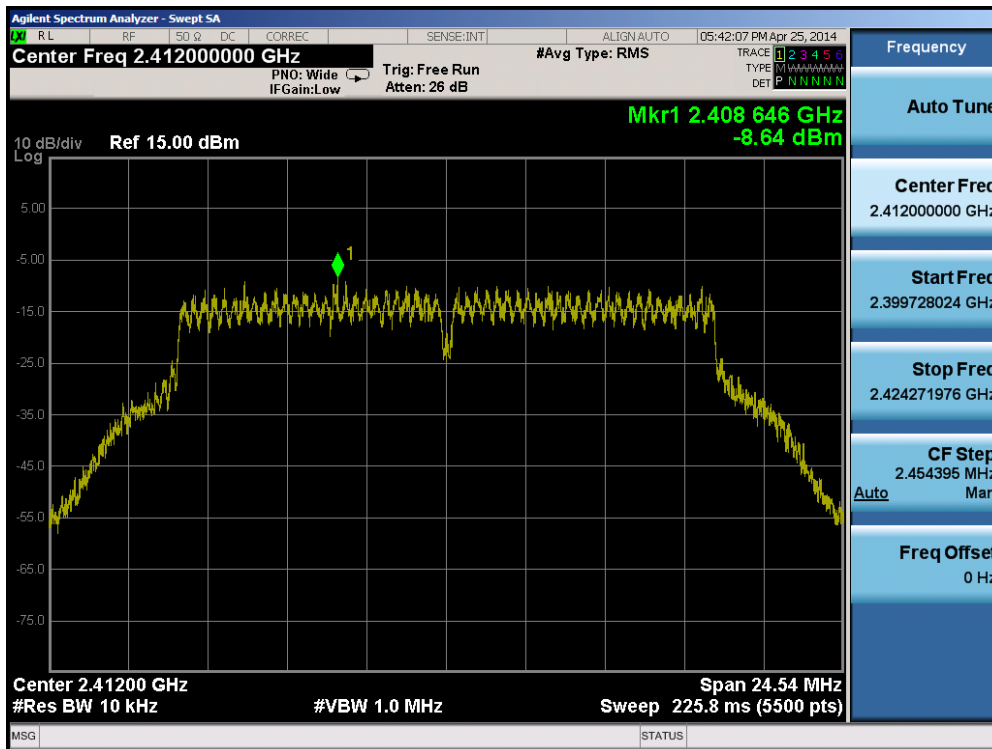


Plot 6-58. Power Spectral Density Plot (802.11g – Ch. 1)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 57 of 122

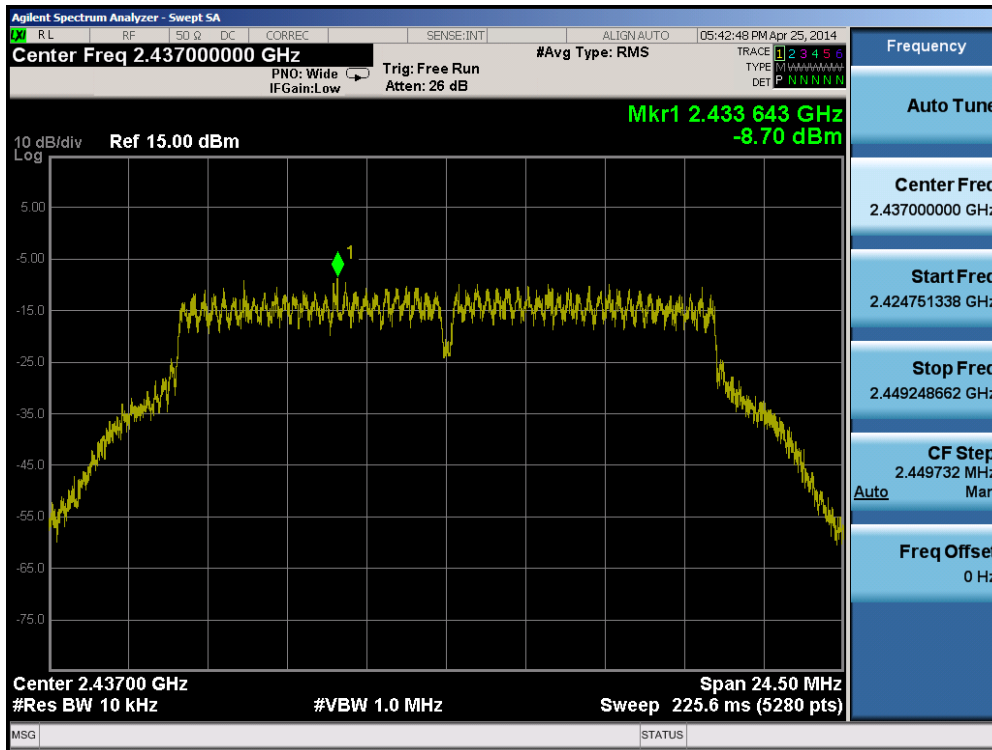


Plot 6-59. Power Spectral Density Plot (802.11g – Ch. 6)

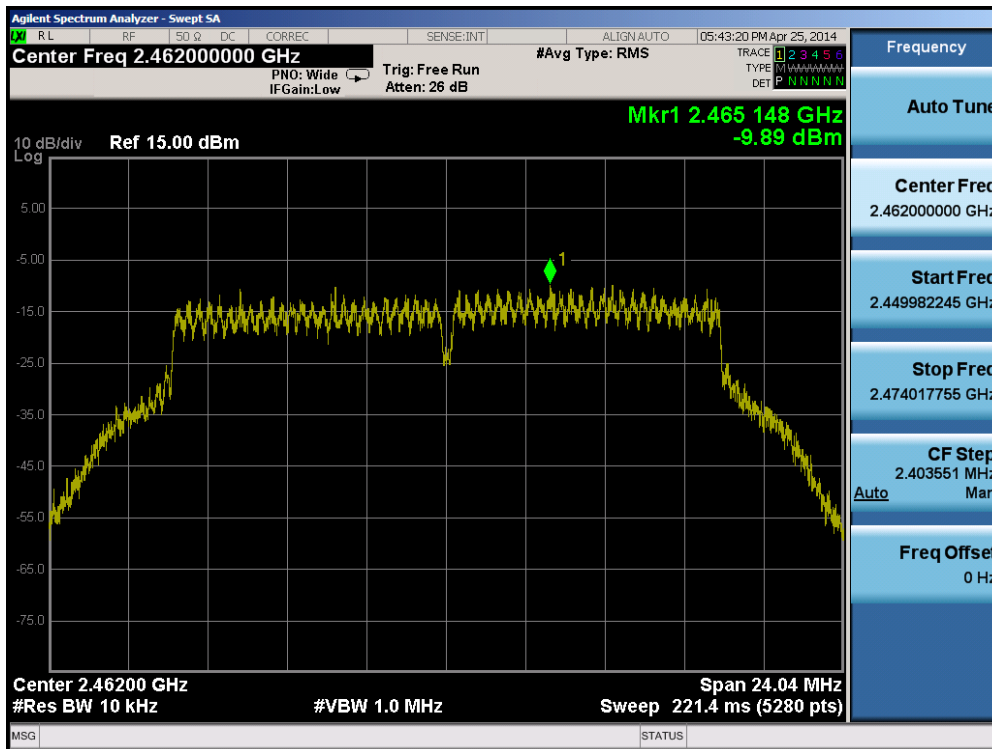


Plot 6-60. Power Spectral Density Plot (802.11g – Ch. 11)

FCC ID: A3LSMT705M	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 58 of 122

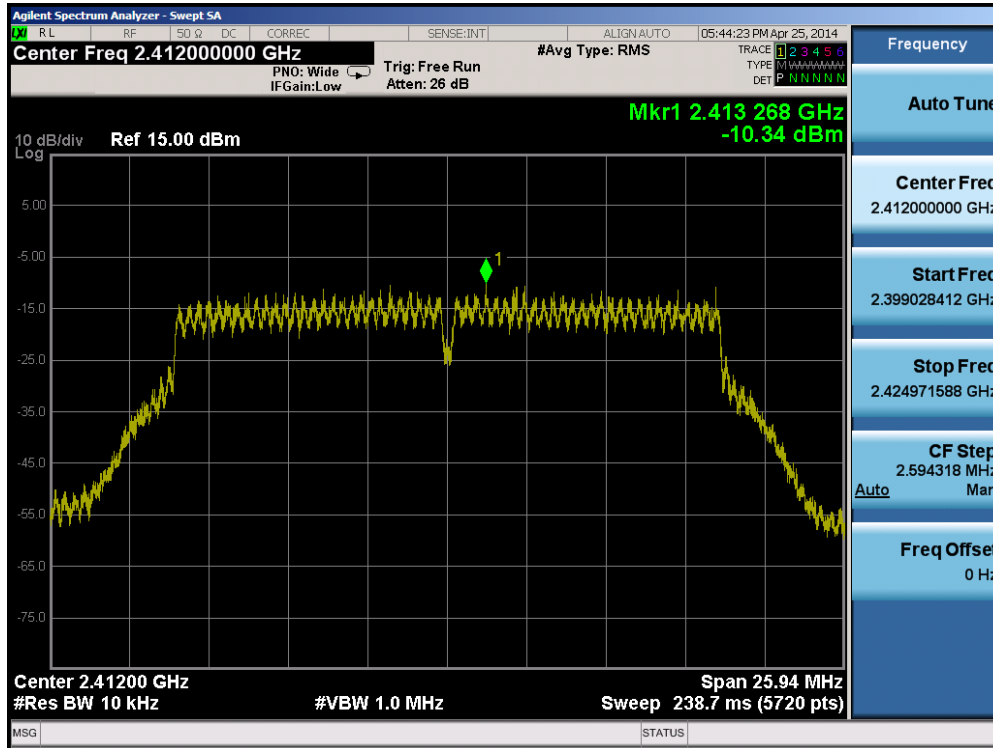


Plot 6-61. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 1)

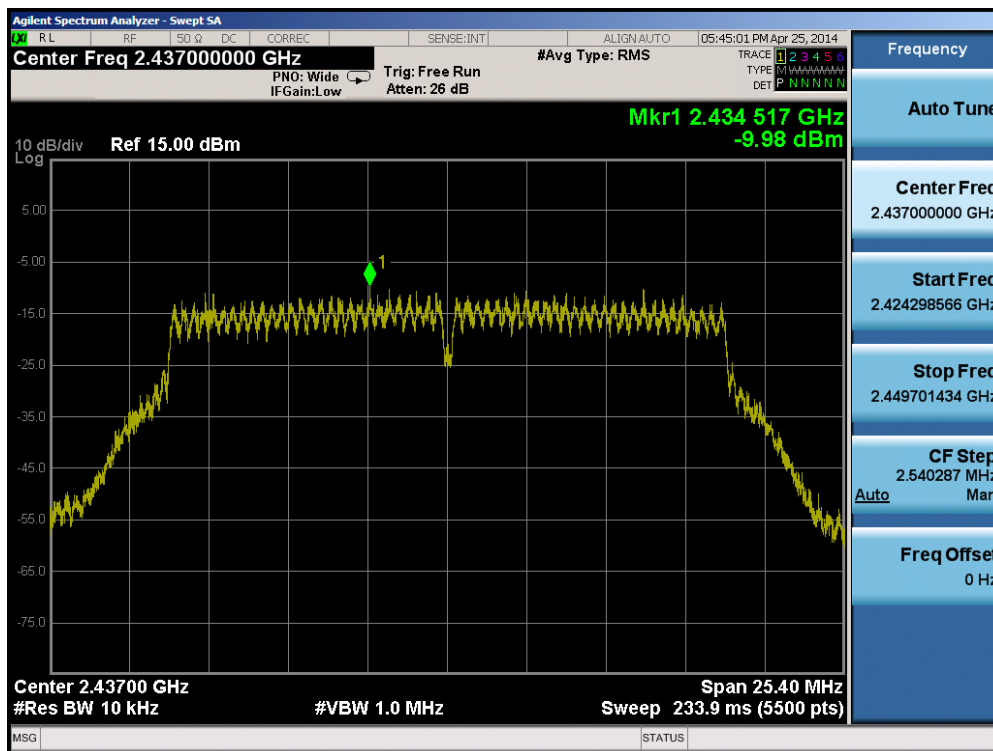


Plot 6-62. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMT705M	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 59 of 122

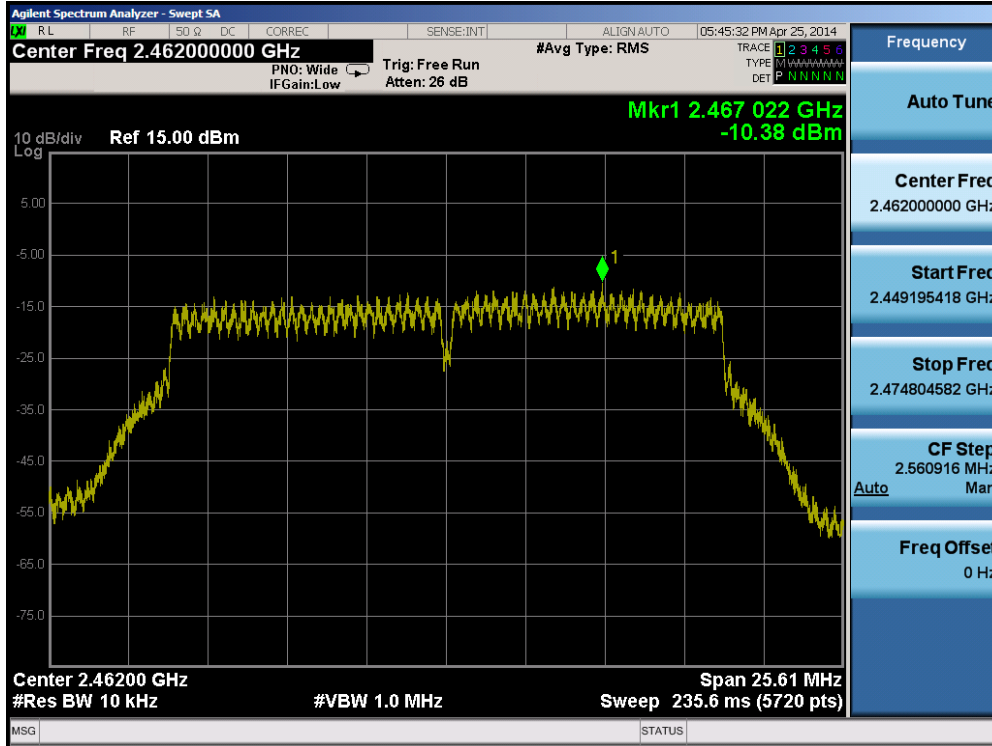


Plot 6-63. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 11)

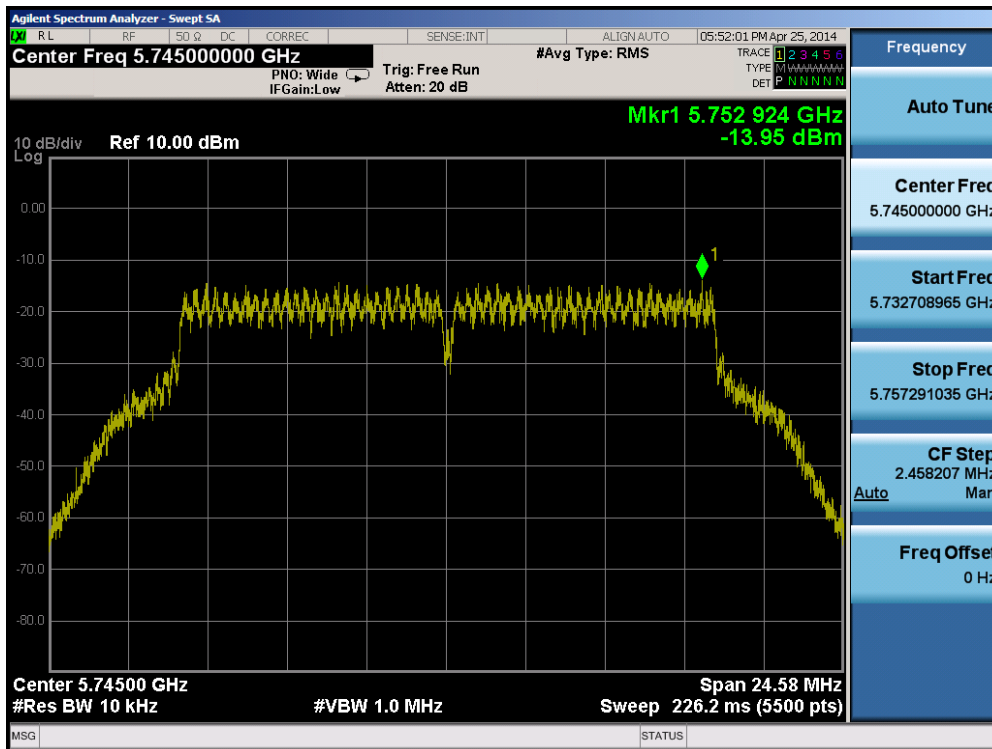


Plot 6-64. Power Spectral Density Plot (802.11a – Ch. 149)

FCC ID: A3LSMT705M	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 60 of 122

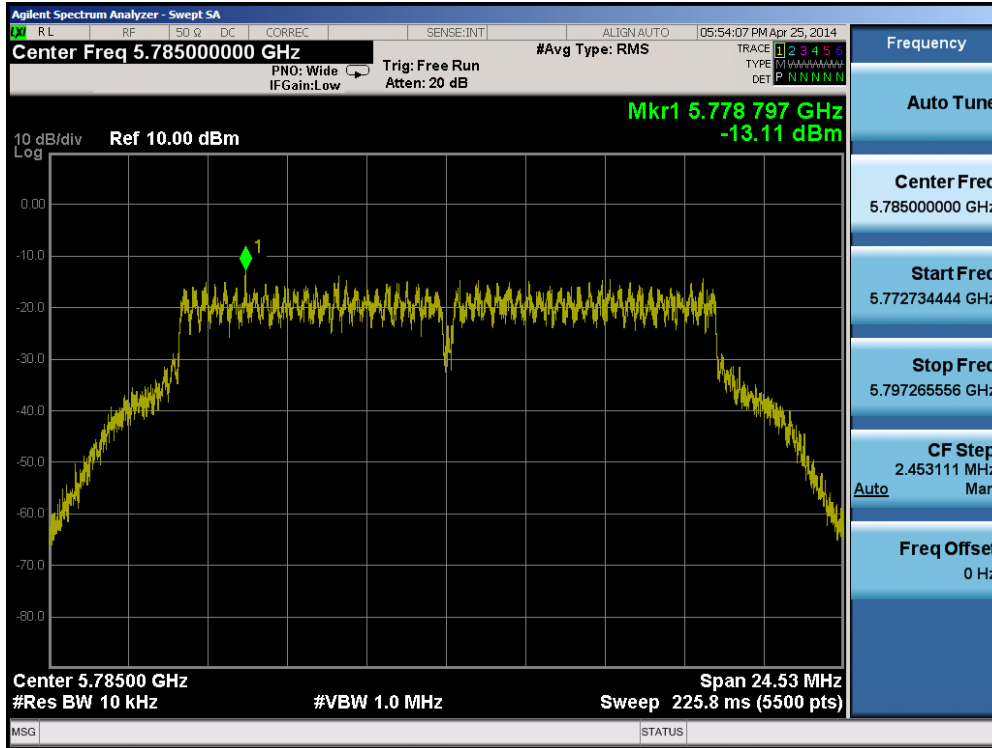


Plot 6-65. Power Spectral Density Plot (802.11a – Ch. 157)

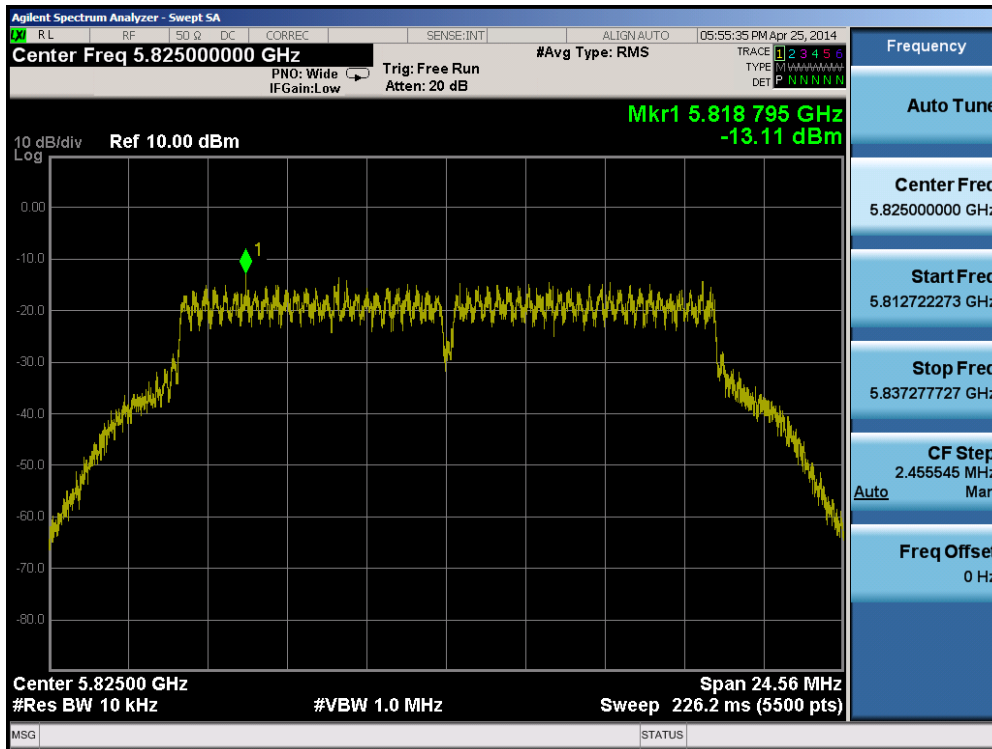


Plot 6-66. Power Spectral Density Plot (802.11a – Ch. 165)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 61 of 122

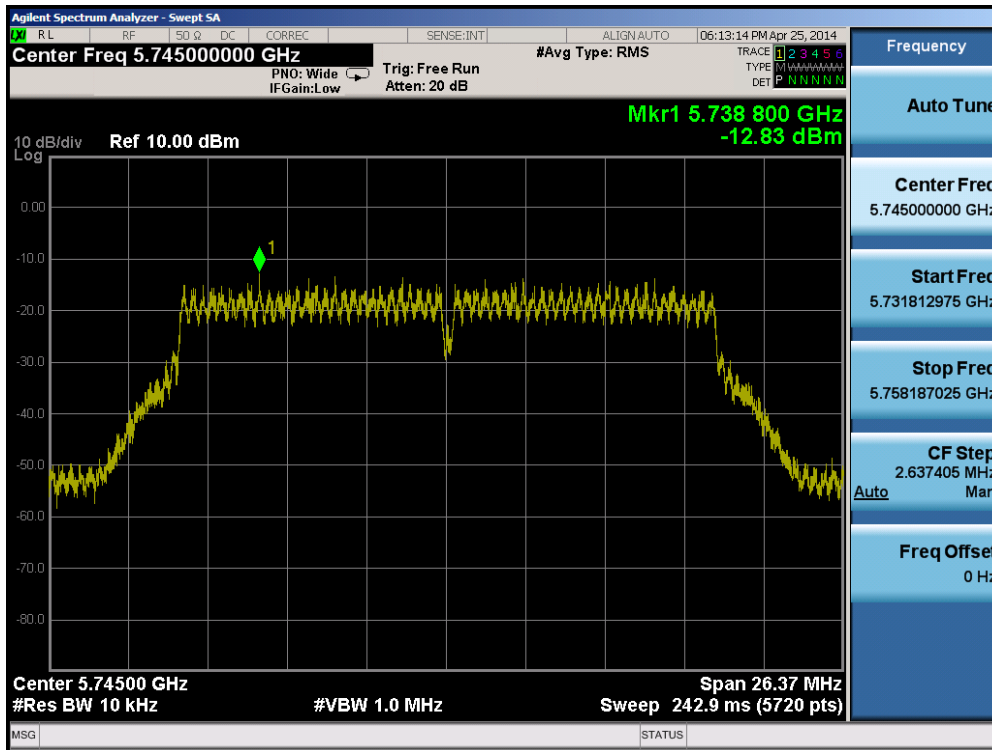


Plot 6-67. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

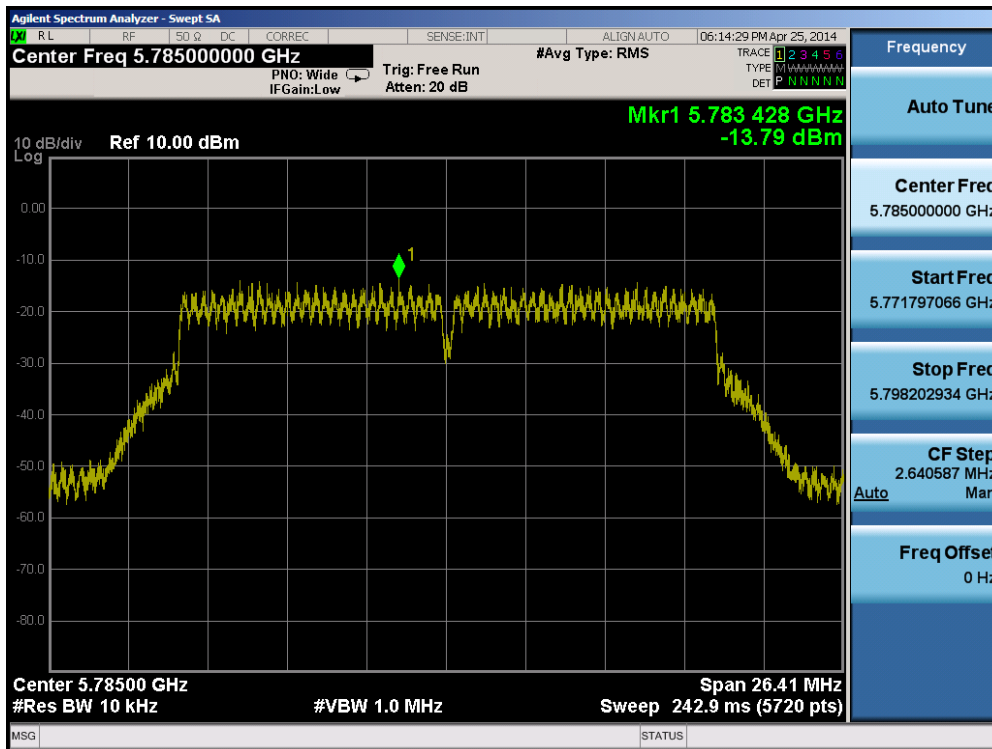


Plot 6-68. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 157)

FCC ID: A3LSMT705M	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 62 of 122

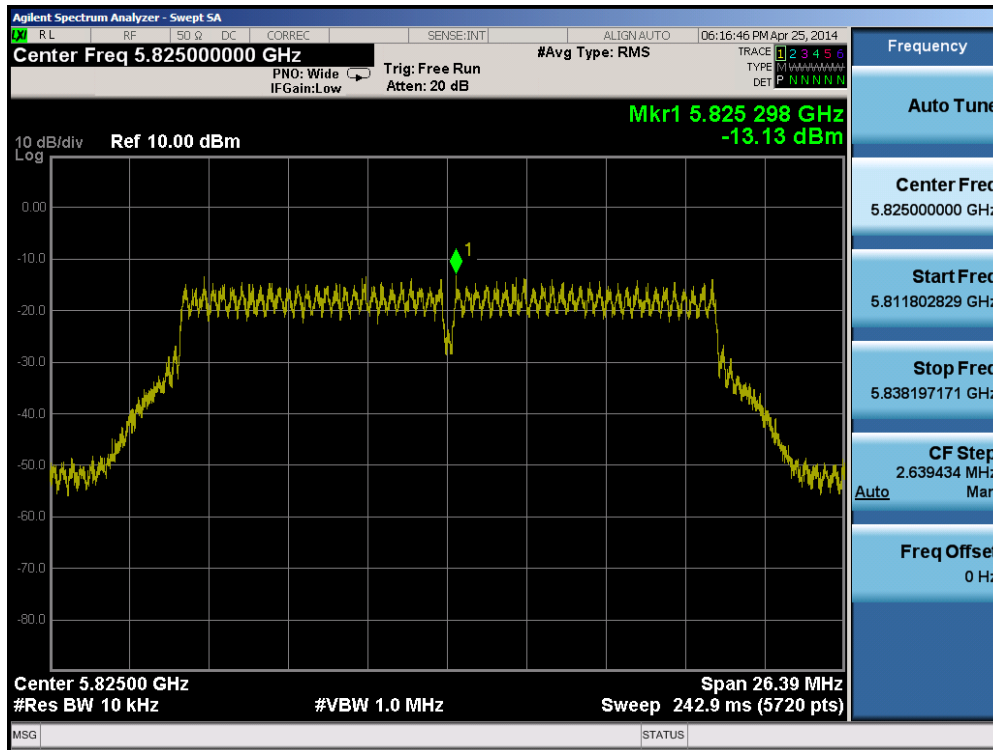


Plot 6-69. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

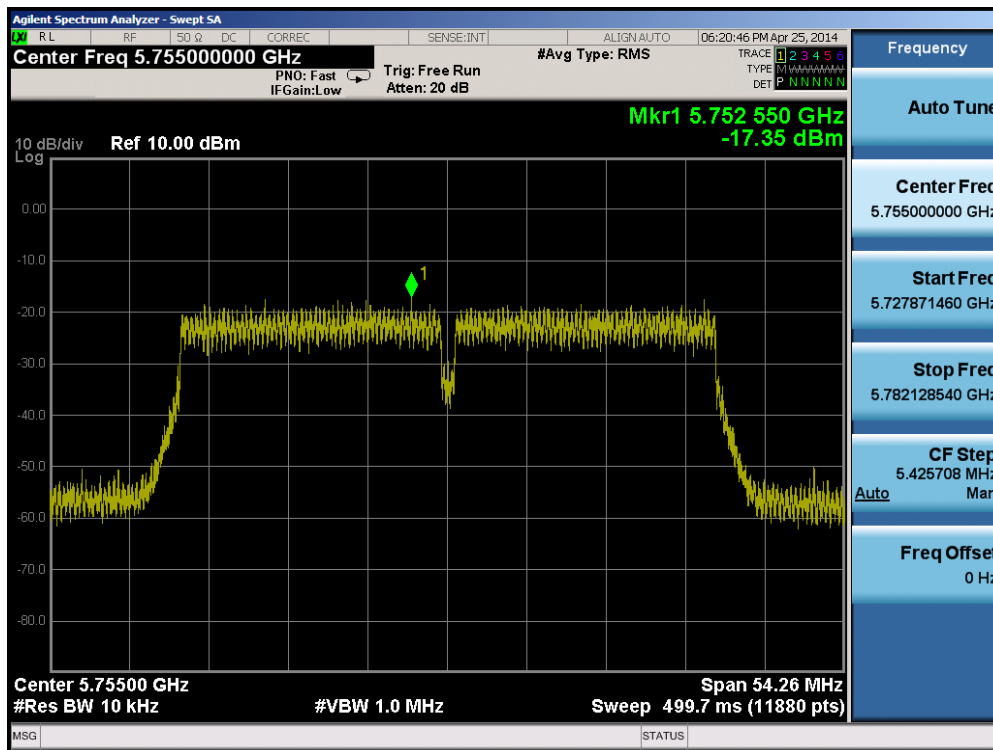


Plot 6-70. Power Spectral Density Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 63 of 122

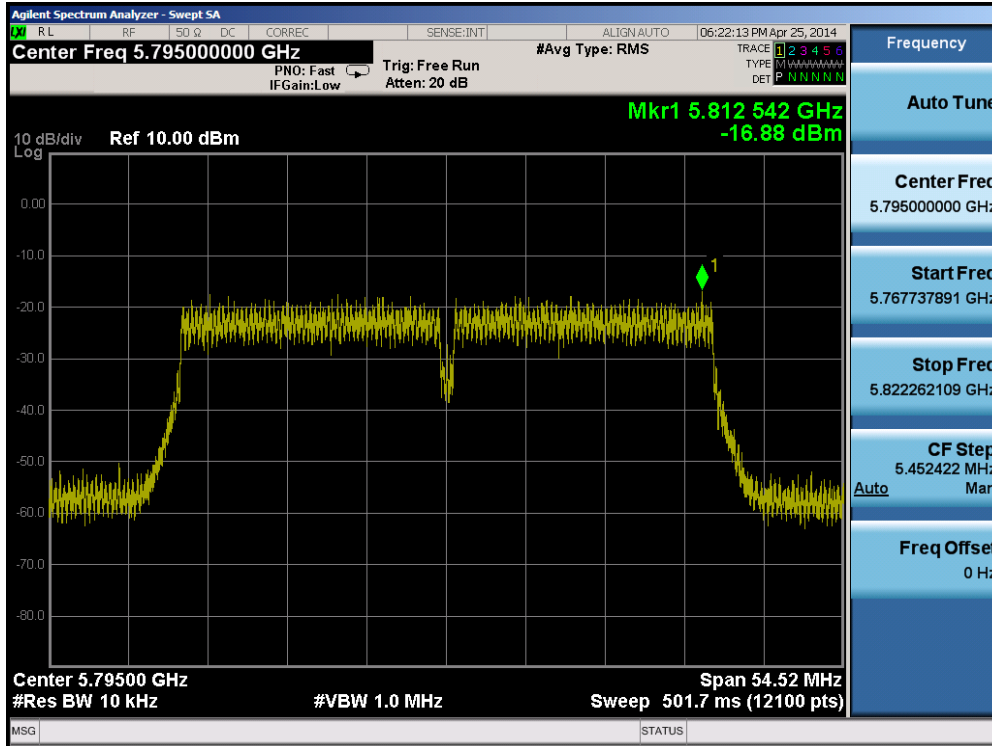

Plot 6-71. Power Spectral Density Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

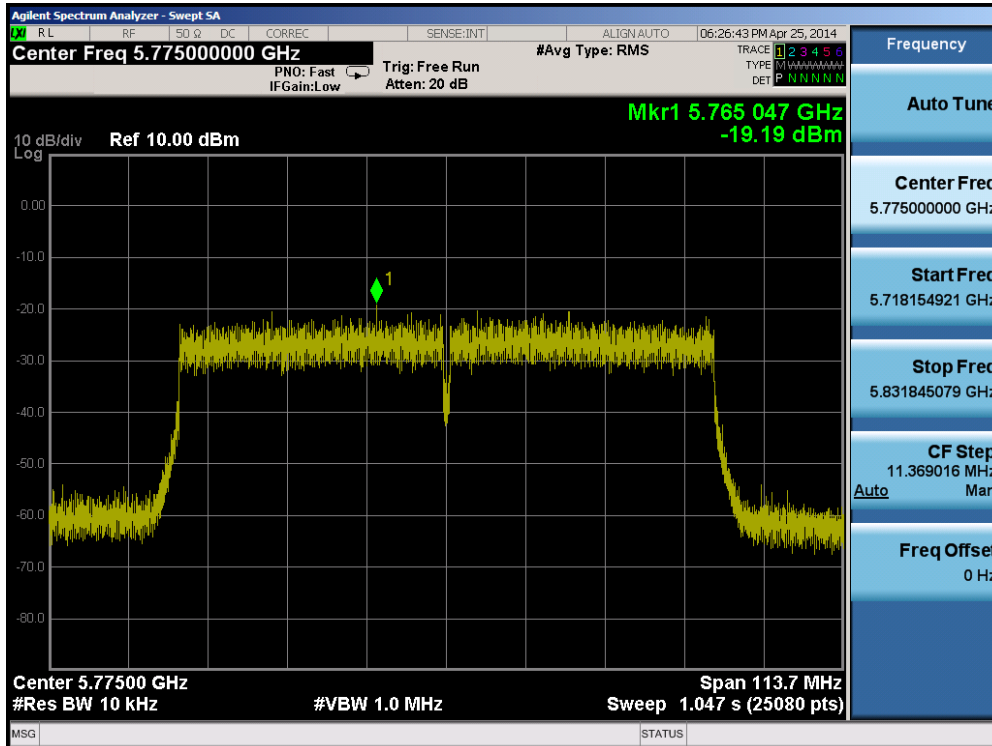



Plot 6-72. Power Spectral Density Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 64 of 122

## MIMO Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	ANT 1 Power Spectral Density [dBm]	ANT 2 Power Spectral Density [dBm]	Summed MIMO Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	-4.90	-5.78	-2.31	8.00	-10.31	Pass
2437	6	b	1	-5.19	-4.04	-1.57	8.00	-9.57	Pass
2462	11	b	1	-5.18	-5.39	-2.28	8.00	-10.28	Pass
2412	1	g	6	-8.79	-8.64	-5.71	8.00	-13.71	Pass
2437	6	g	6	-8.79	-8.70	-5.74	8.00	-13.74	Pass
2462	11	g	6	-8.05	-9.89	-5.86	8.00	-13.86	Pass
2412	1	n	6.5/7.2 (MCS0)	-9.63	-10.34	-6.96	8.00	-14.96	Pass
2437	6	n	6.5/7.2 (MCS0)	-8.19	-9.98	-5.98	8.00	-13.98	Pass
2462	11	n	6.5/7.2 (MCS0)	-7.38	-10.38	-5.61	8.00	-13.61	Pass
5745	149	a	6	-14.47	-13.95	-11.19	8.00	-19.19	Pass
5785	157	a	6	-13.73	-13.11	-10.40	8.00	-18.40	Pass
5825	165	a	6	-14.59	-13.12	-10.78	8.00	-18.78	Pass
5745	149	n (20MHz)	6.5/7.2 (MCS0)	-13.01	-12.83	-9.91	8.00	-17.91	Pass
5785	157	n (20MHz)	6.5/7.2 (MCS0)	-13.38	-13.80	-10.57	8.00	-18.57	Pass
5825	165	n (20MHz)	6.5/7.2 (MCS0)	-12.76	-13.13	-9.93	8.00	-17.93	Pass
5755	151	n (40MHz)	13.5/15 (MCS0)	-14.59	-17.35	-12.74	8.00	-20.74	Pass
5795	159	n (40MHz)	13.5/15 (MCS0)	-16.21	-16.88	-13.52	8.00	-21.52	Pass
5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-19.48	-19.19	-16.32	8.00	-24.32	Pass

**Table 6-30.MIMO Conducted Power Density Measurements**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 65 of 122	

## 6.5 Conducted Emissions at the Band Edge

§15.247(d)

### Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, 6 Mbps for “a” mode, 6.5/7.2Mbps for 20MHz BW “n” mode, 13.5/15Mbps for 40MHz “n”, and 29.3/32.5Mbps for 80MHz “ac” mode as these settings produced the worst-case emissions.

***The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 9.1).***

### Test Procedure Used


KDB 558074 v03r01 – Section 11.3

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 6-5. Test Instrument & Measurement Setup**

### Test Notes


None

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 66 of 122	

## Antenna-1 Conducted Emissions at the Band Edge

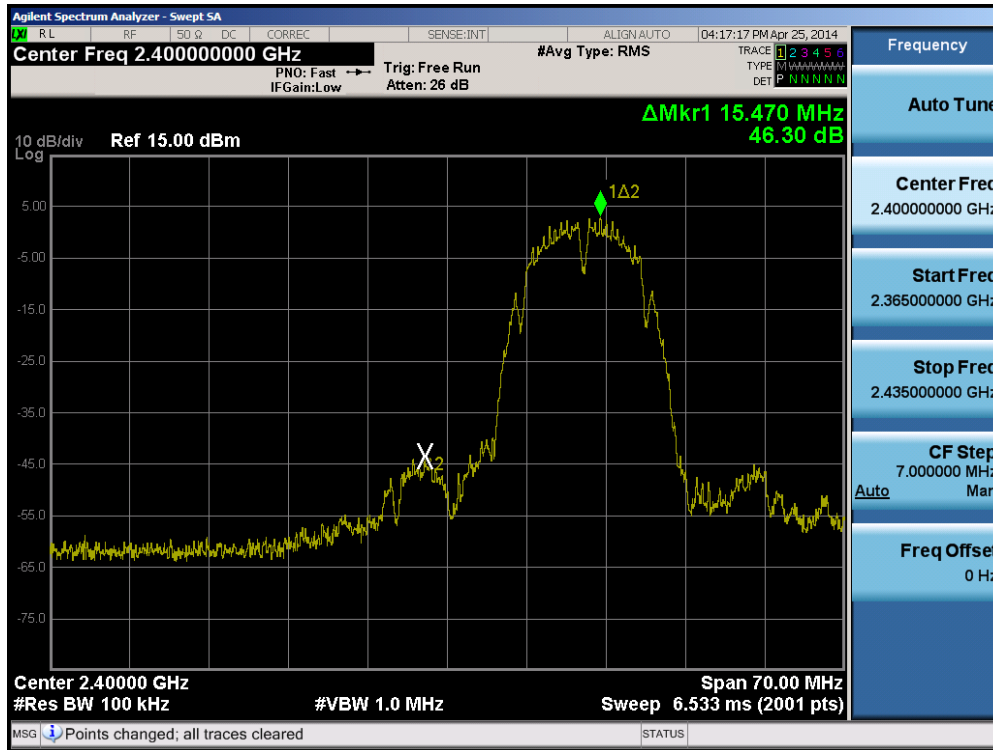


Plot 6-73. Band Edge Plot (802.11b – Ch. 1)

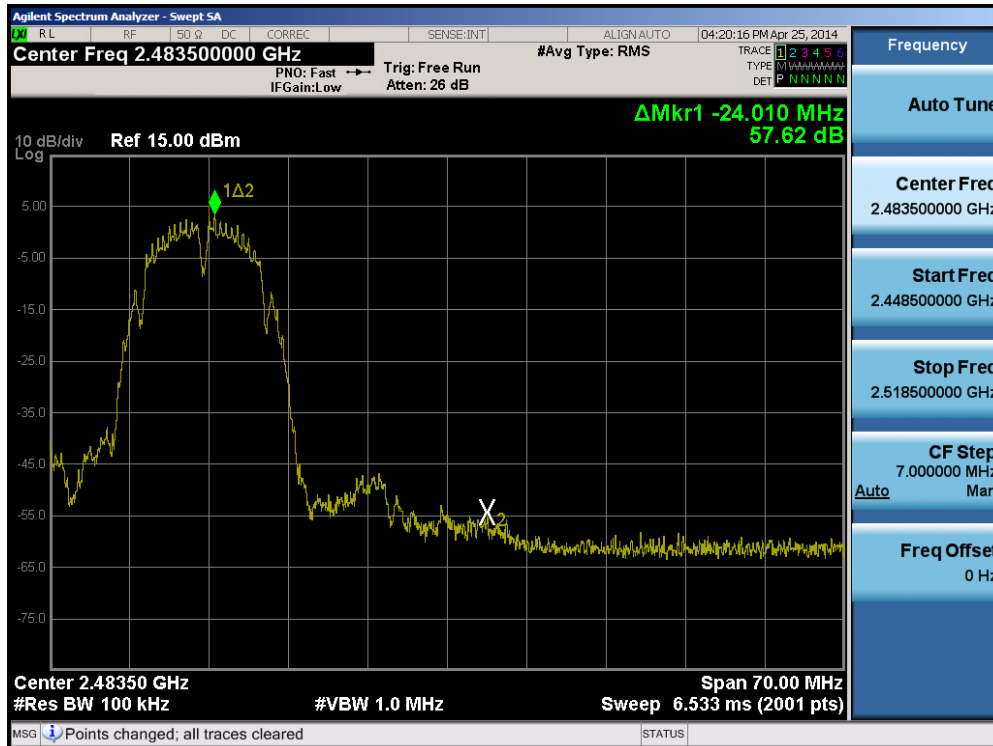


Plot 6-74. Band Edge Plot (802.11b – Ch. 11)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 67 of 122

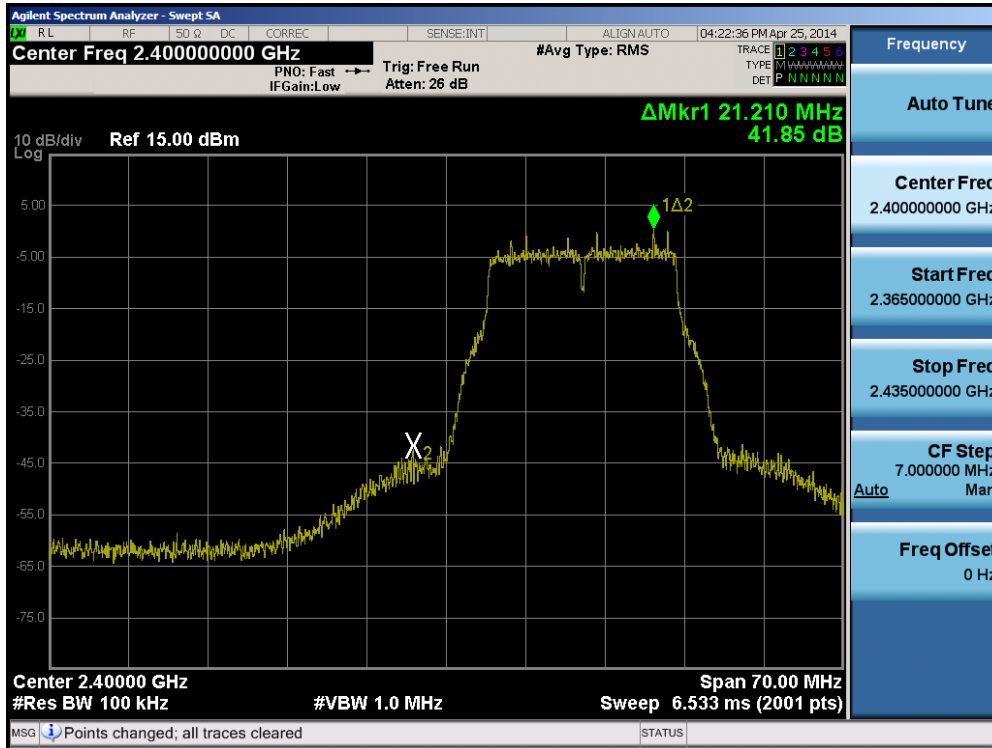


Plot 6-75. Band Edge Plot (802.11g– Ch. 1)

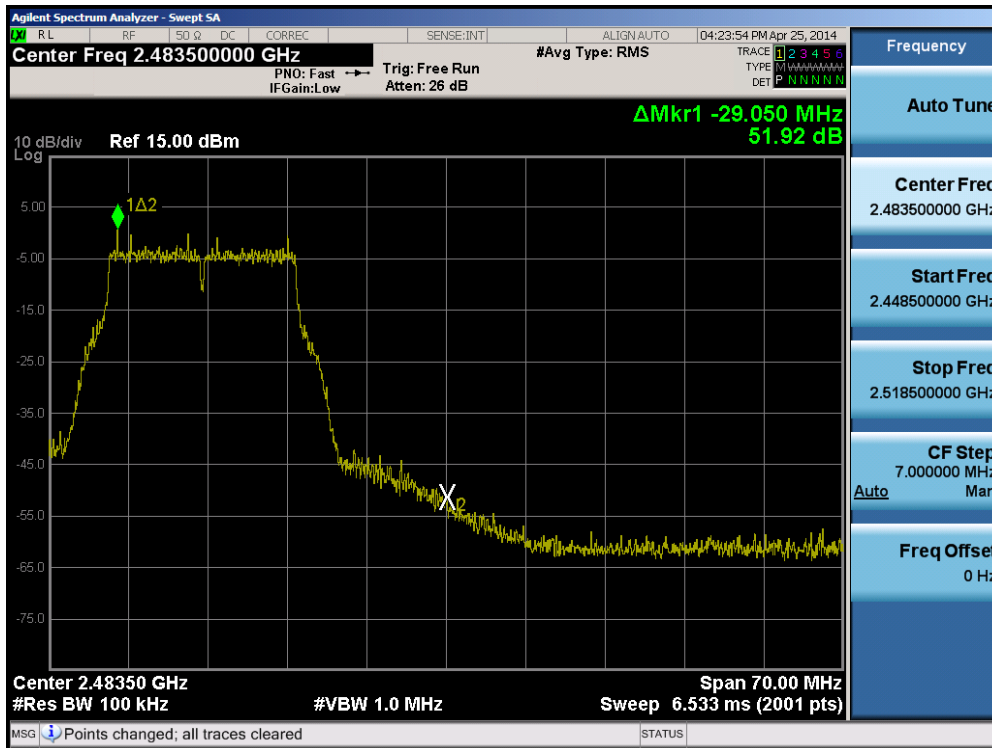


Plot 6-76. Band Edge Plot (802.11g – Ch. 11)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 68 of 122

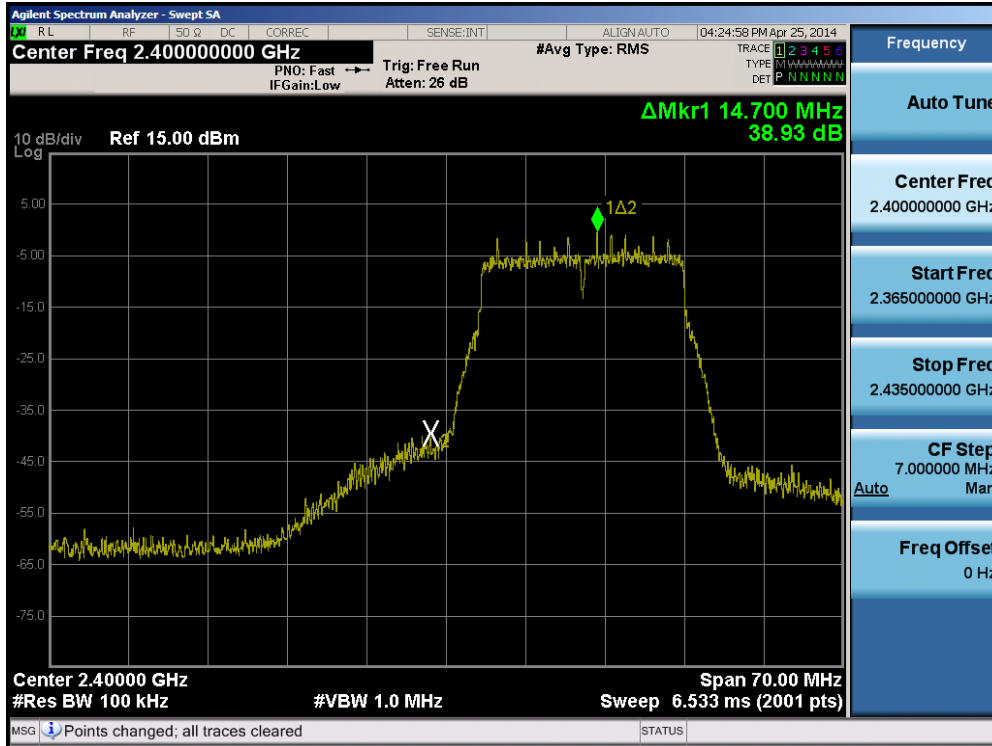


Plot 6-77. Band Edge Plot (802.11n (2.4GHz) – Ch. 1)

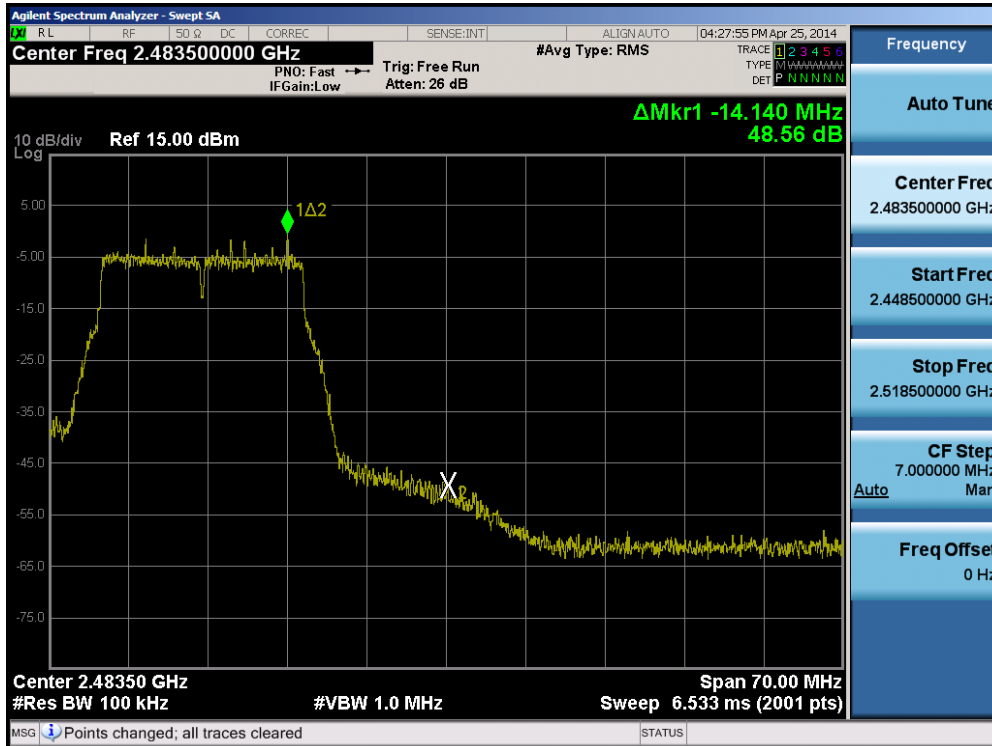


Plot 6-78. Band Edge Plot (802.11n (2.4GHz) – Ch. 11)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 69 of 122

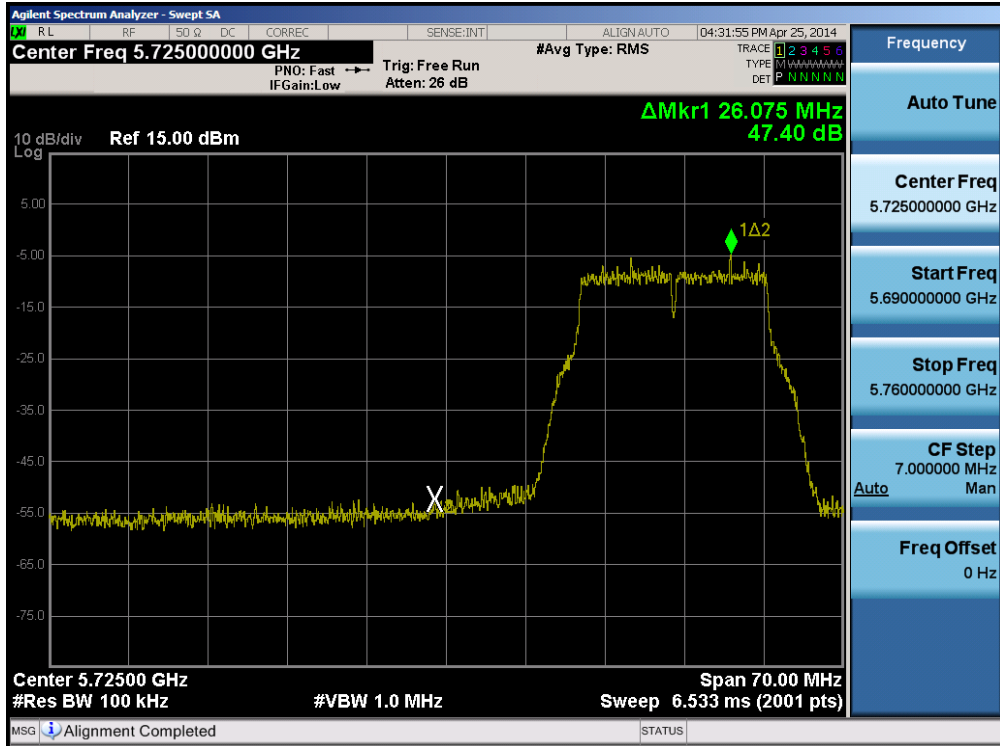


Plot 6-79. Band Edge Plot (802.11a – Ch. 149)

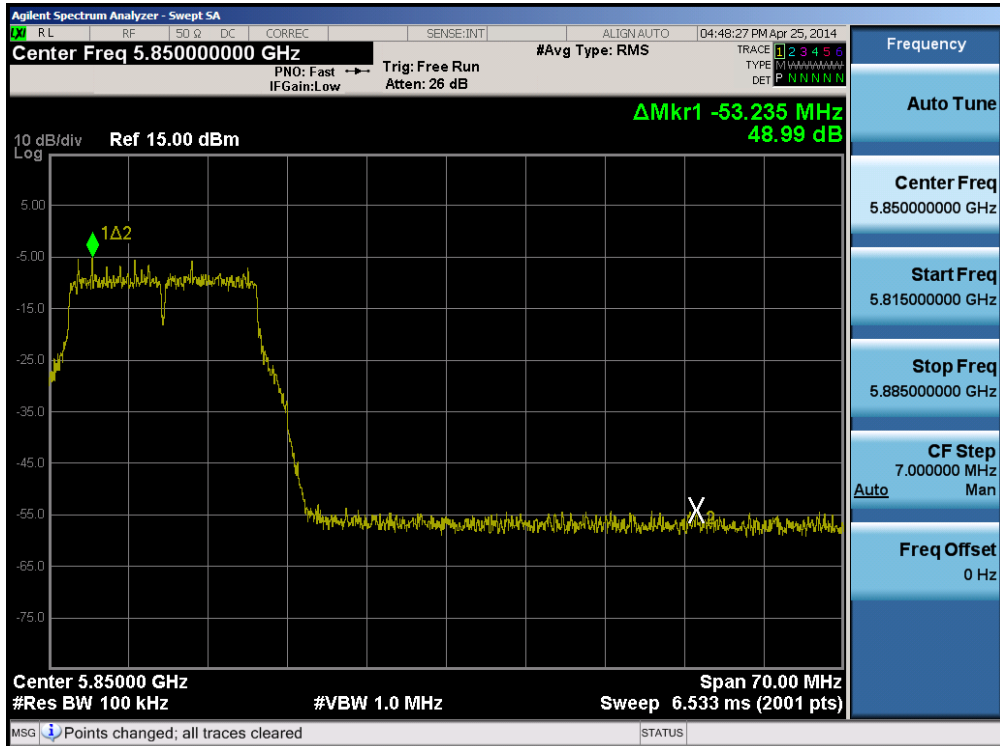


Plot 6-80. Band Edge Plot (802.11a – Ch. 165)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 70 of 122

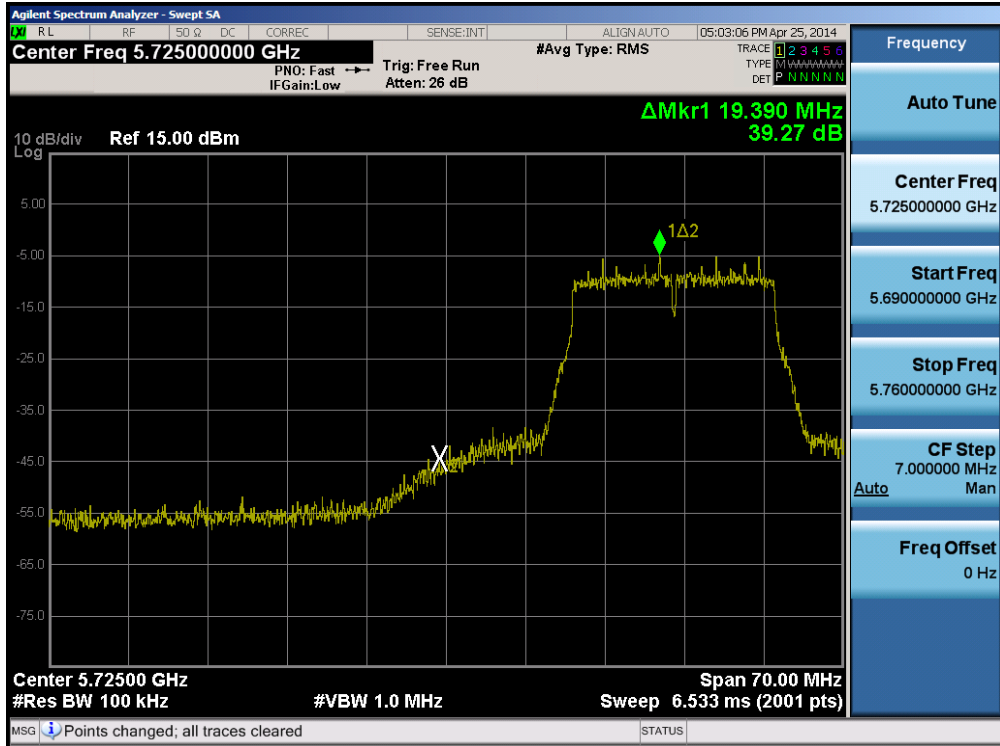


Plot 6-81. Band Edge Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

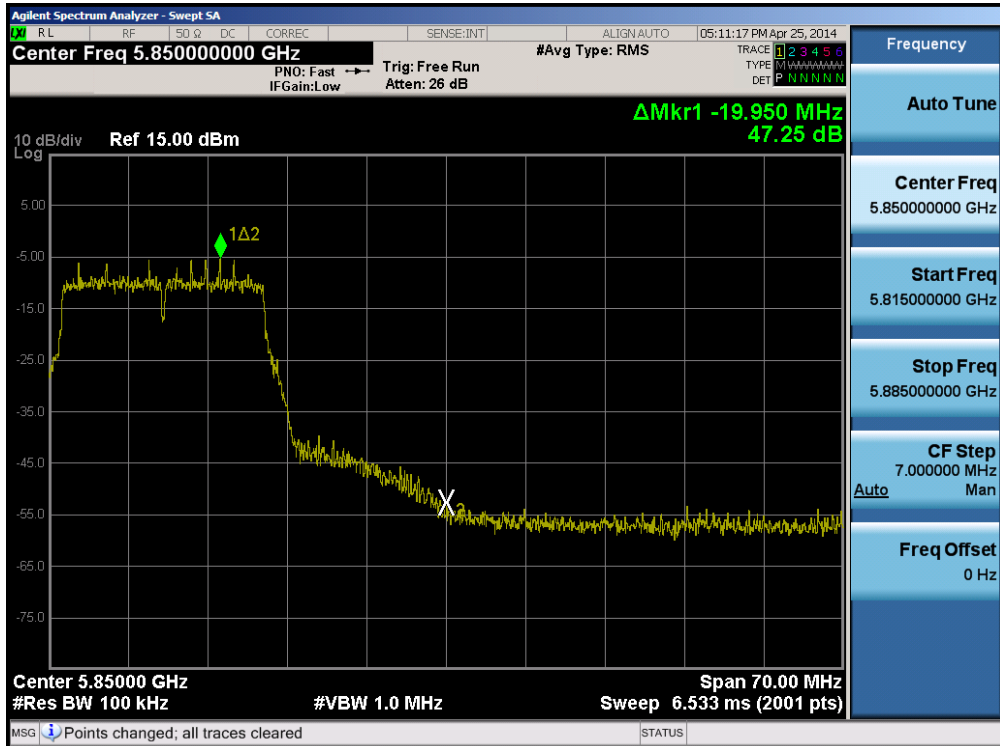


Plot 6-82. Band Edge Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 71 of 122

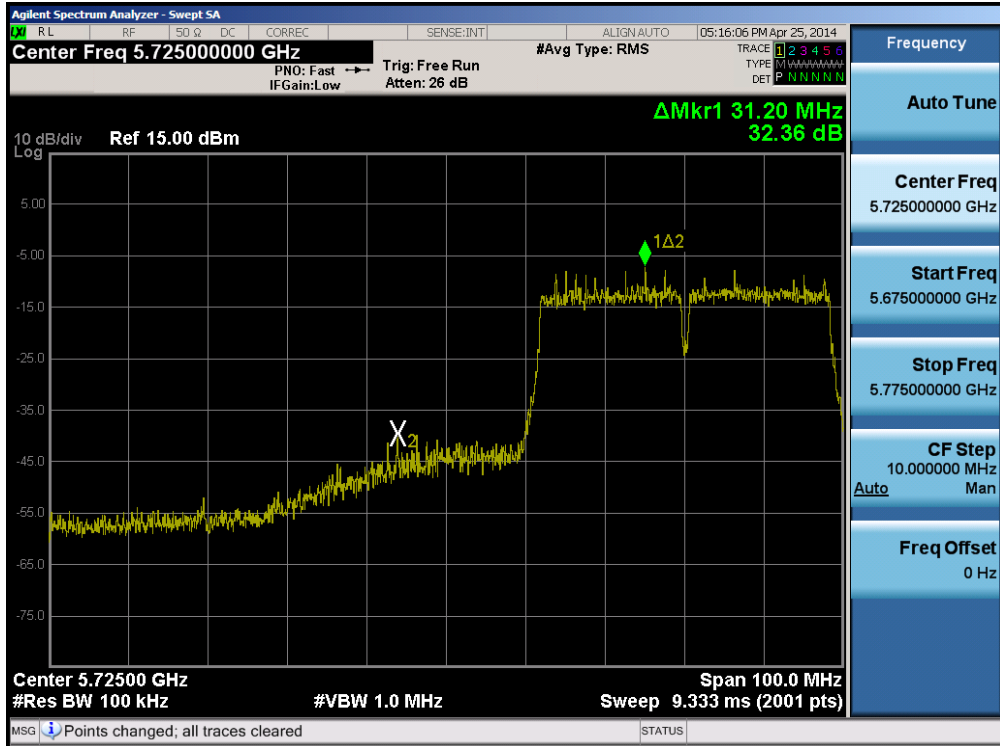


Plot 6-83. Band Edge Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

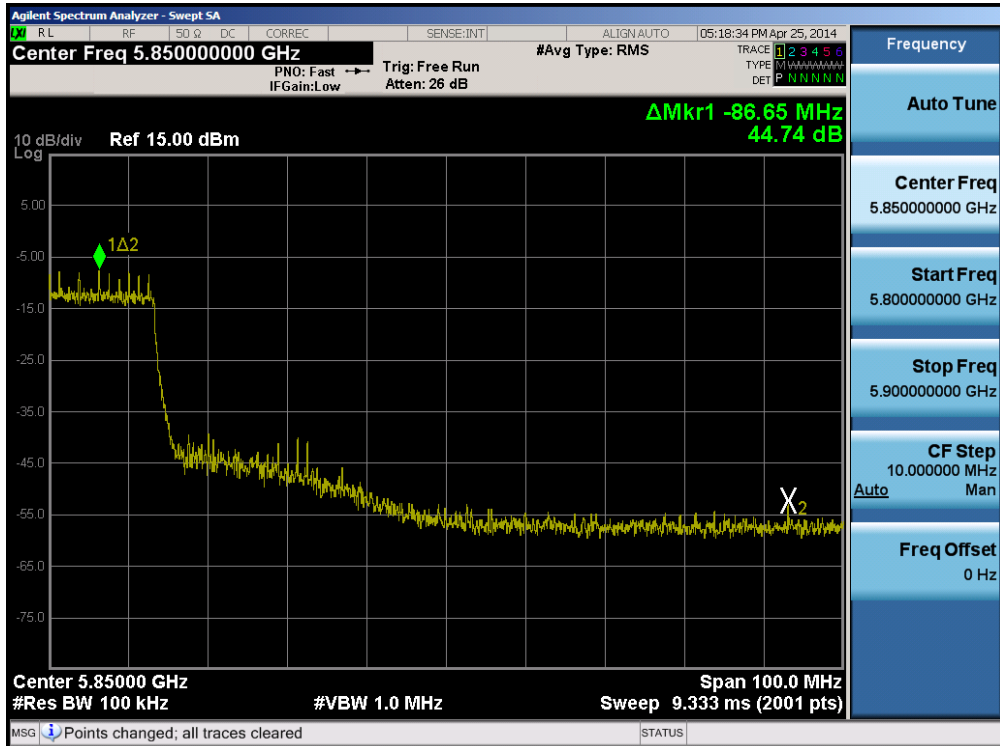


Plot 6-84. Band Edge Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 72 of 122

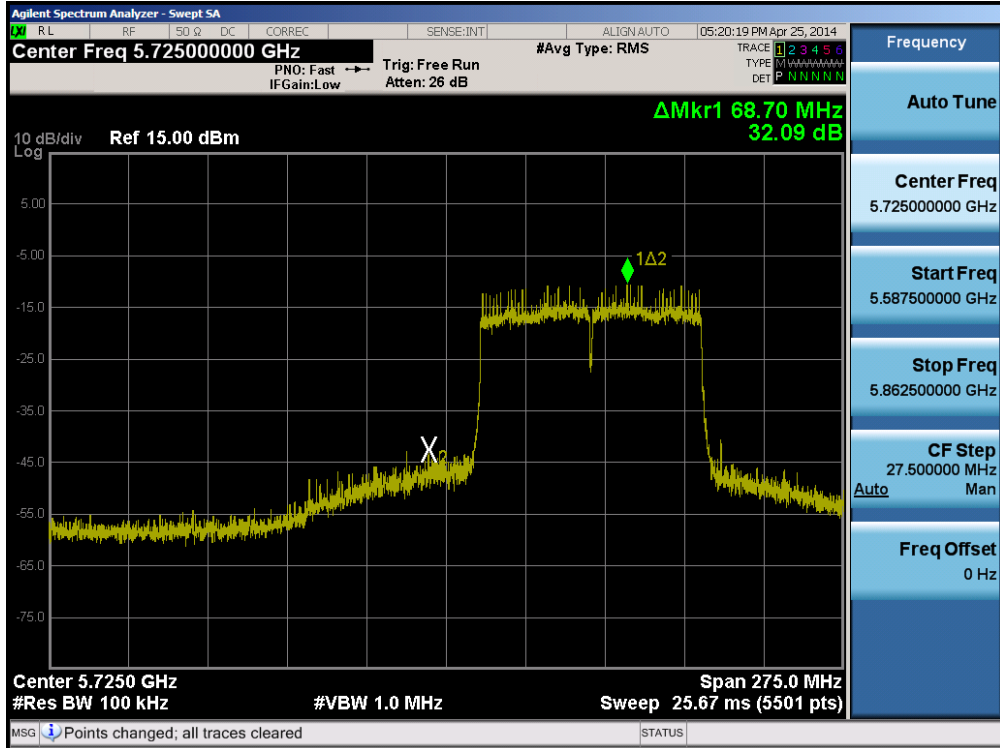


Plot 6-85. Band Edge Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

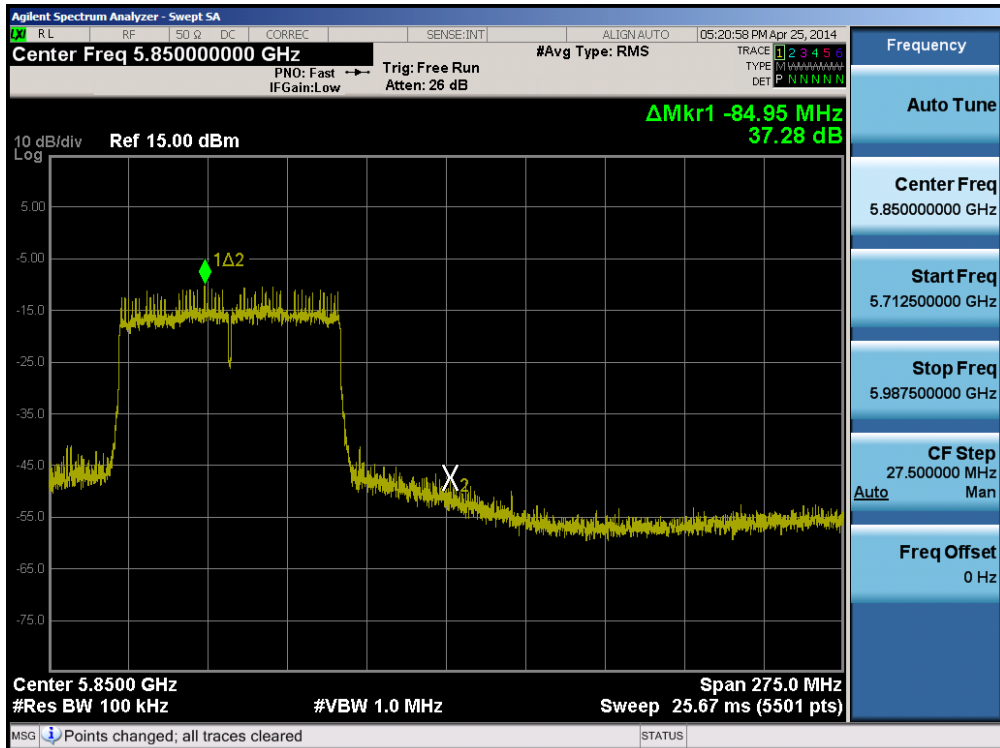


Plot 6-86. Band Edge Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 73 of 122

## Antenna-2 Conducted Emissions at the Band Edge

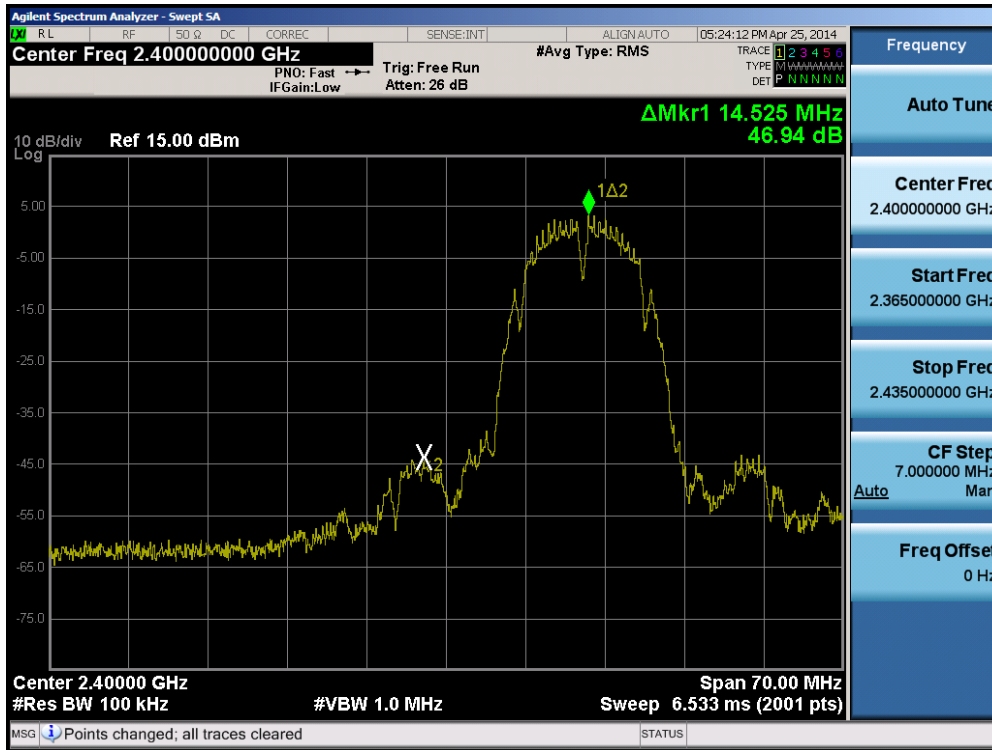


Plot 6-87. Band Edge Plot (802.11b – Ch. 1)

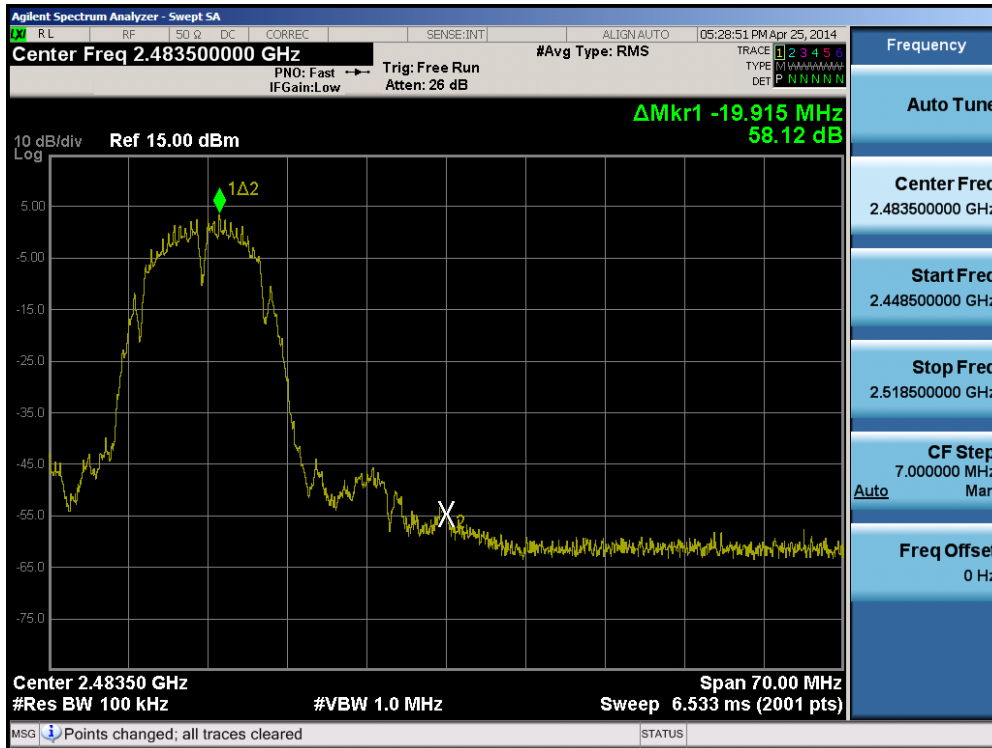


Plot 6-88. Band Edge Plot (802.11b – Ch. 11)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 74 of 122

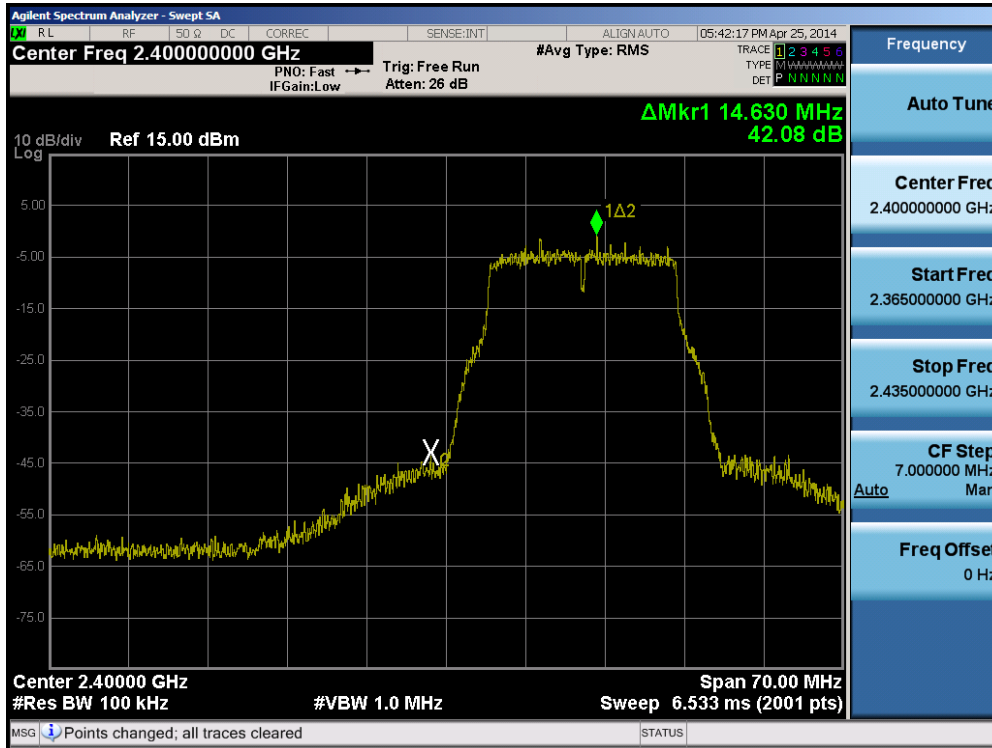


Plot 6-89. Band Edge Plot (802.11g– Ch. 1)

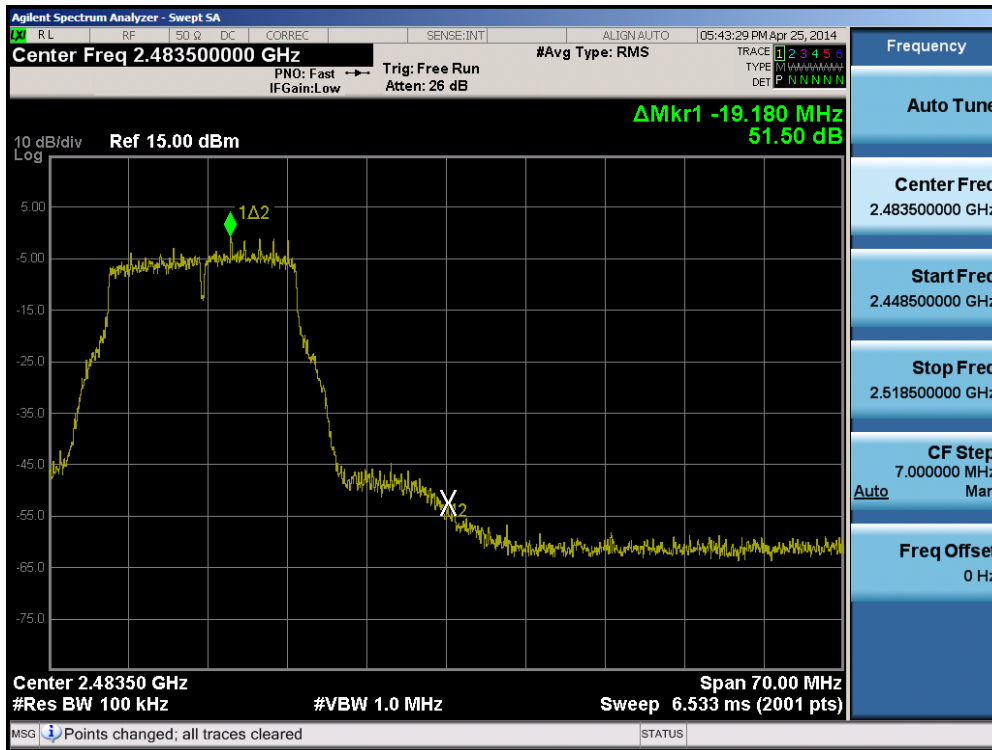


Plot 6-90. Band Edge Plot (802.11g – Ch. 11)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 75 of 122

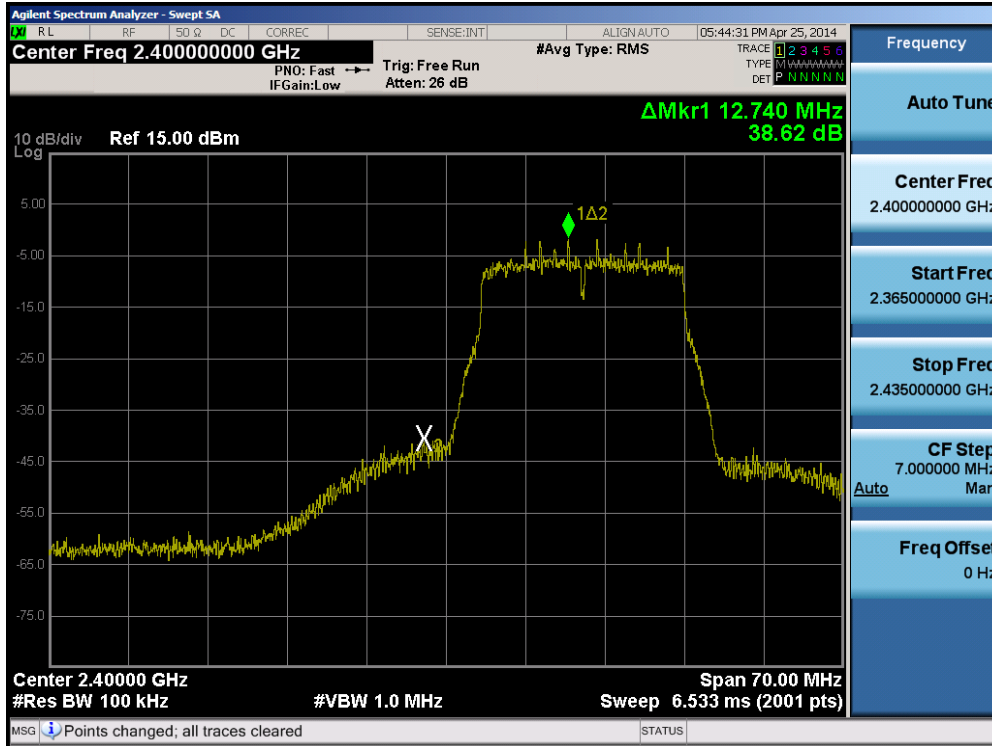


Plot 6-91. Band Edge Plot (802.11n (2.4GHz) – Ch. 1)

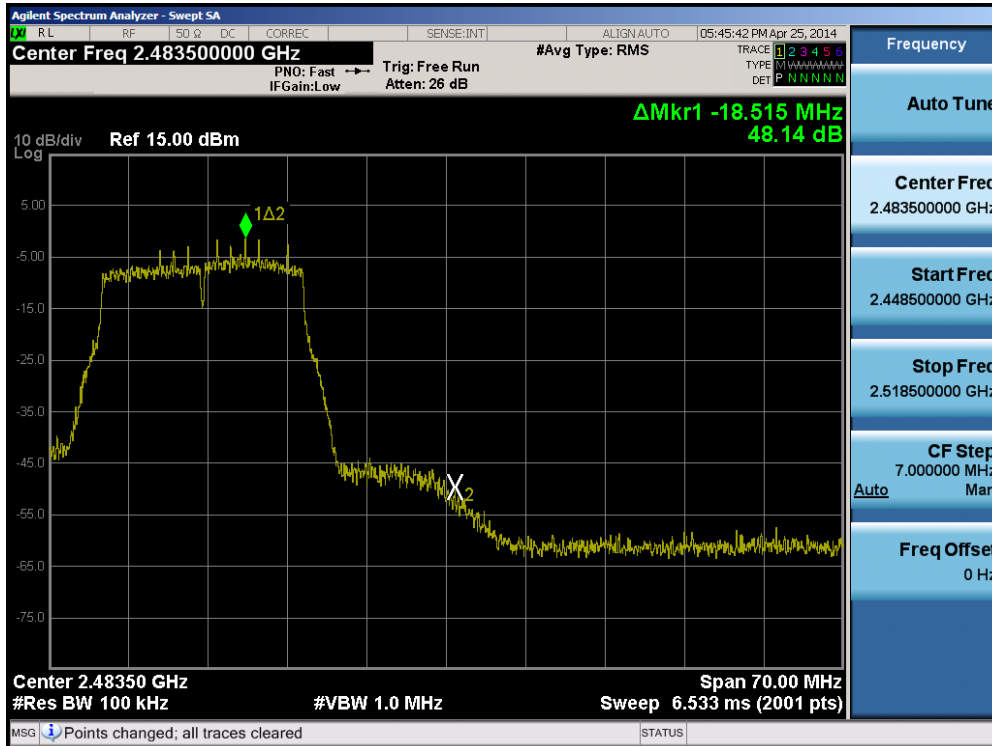


Plot 6-92. Band Edge Plot (802.11n (2.4GHz) – Ch. 11)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 76 of 122

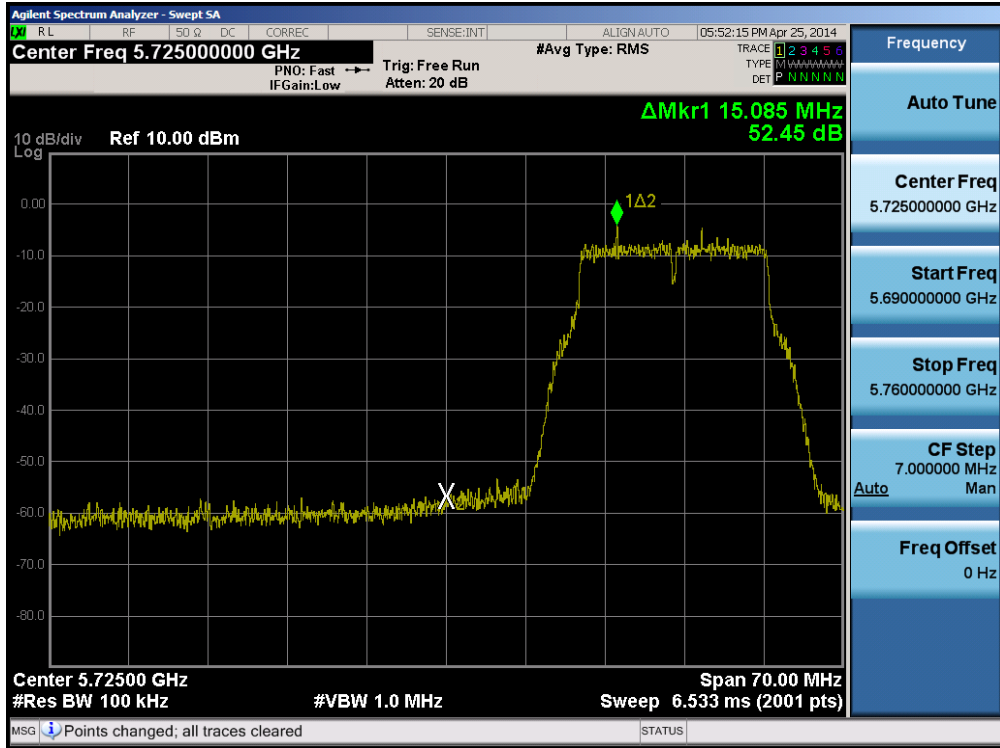


Plot 6-93. Band Edge Plot (802.11a – Ch. 149)

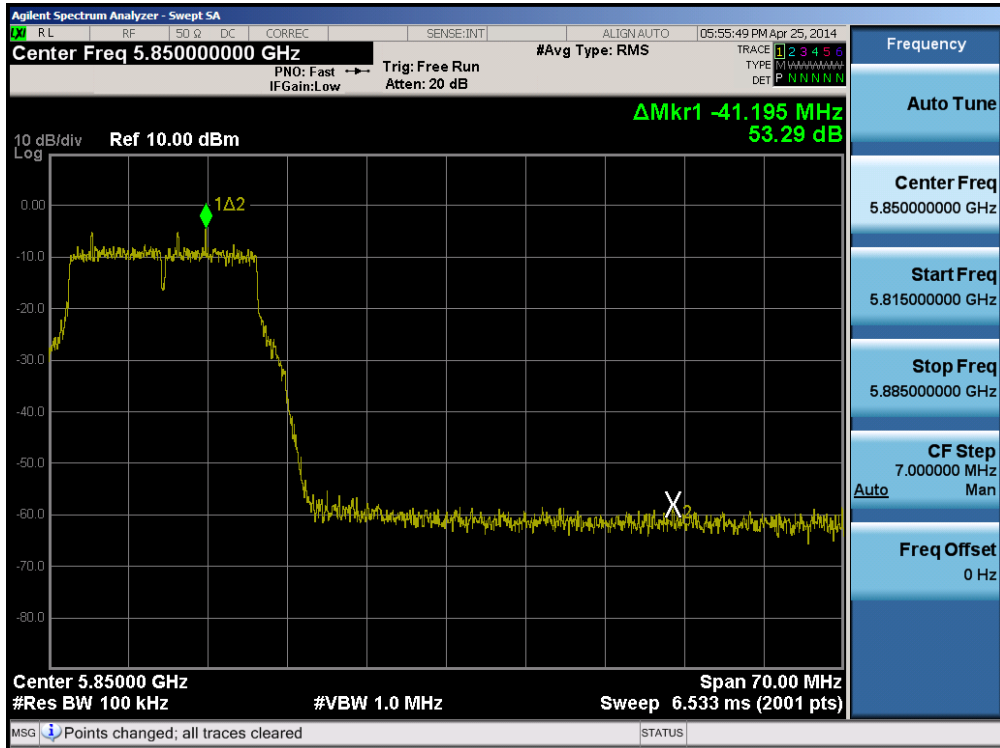


Plot 6-94. Band Edge Plot (802.11a – Ch. 165)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 77 of 122

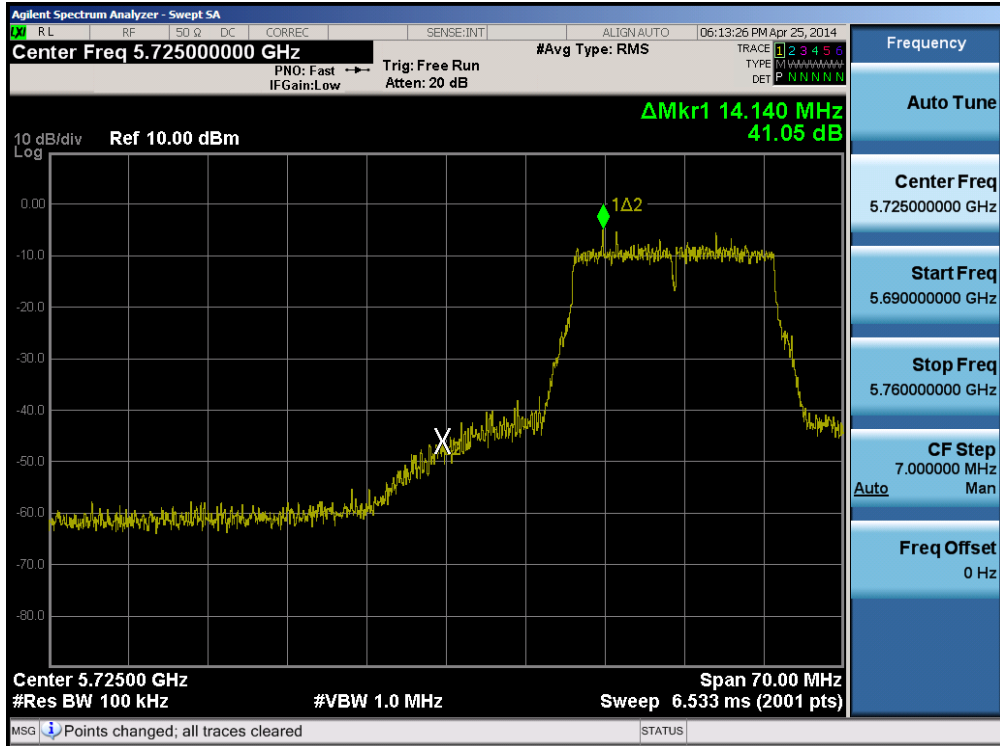


Plot 6-95. Band Edge Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

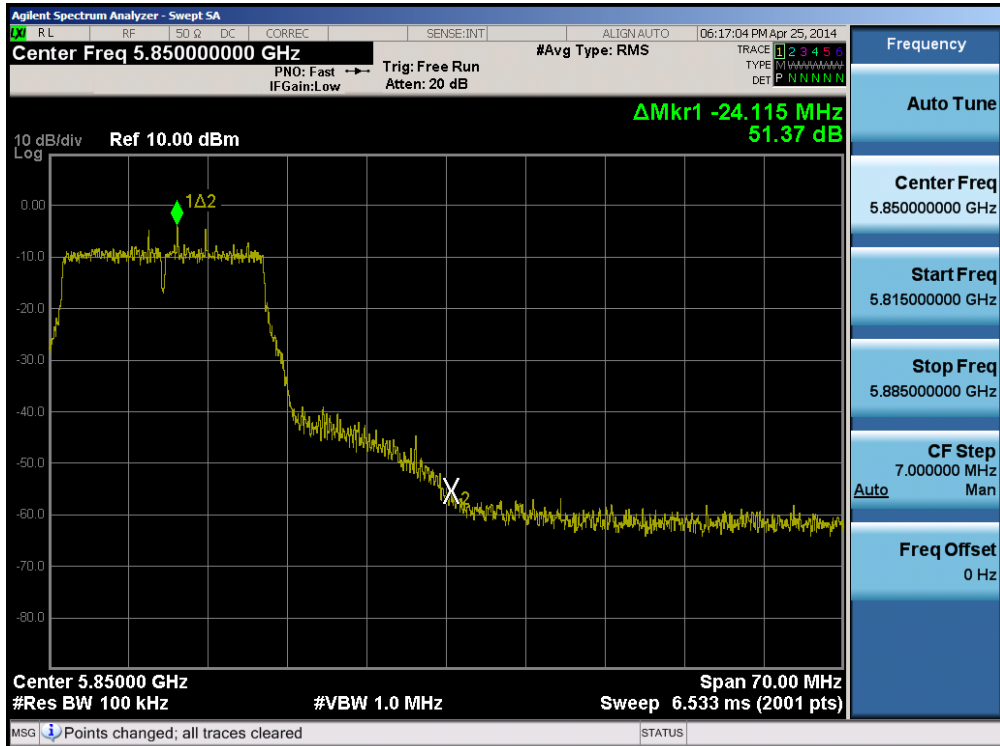


Plot 6-96. Band Edge Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 78 of 122

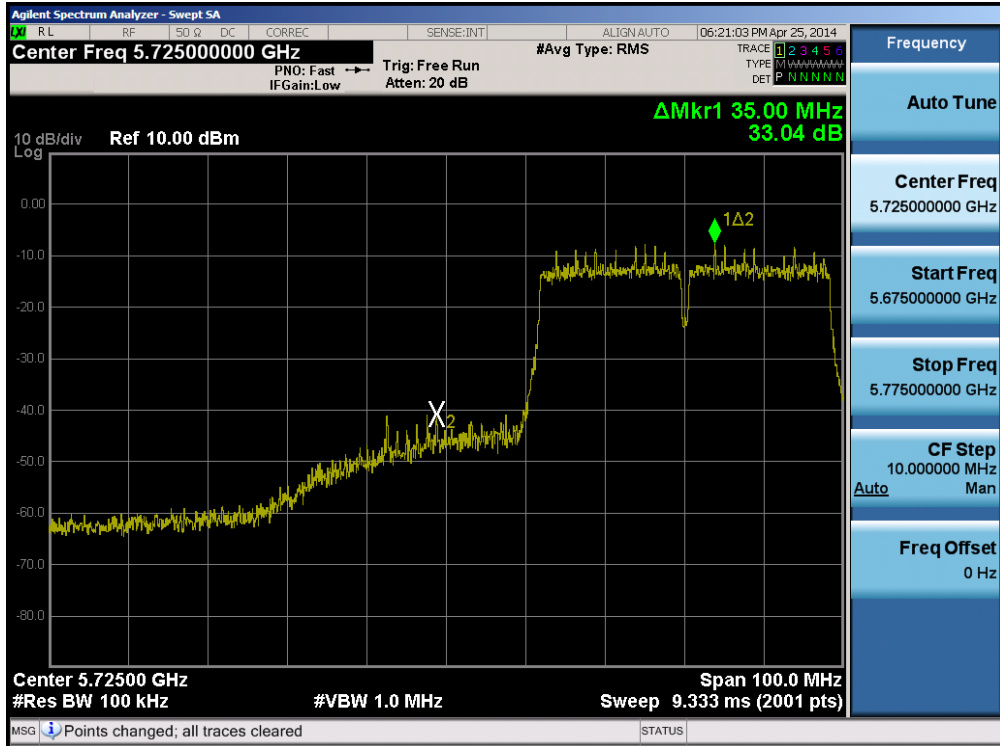


Plot 6-97. Band Edge Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

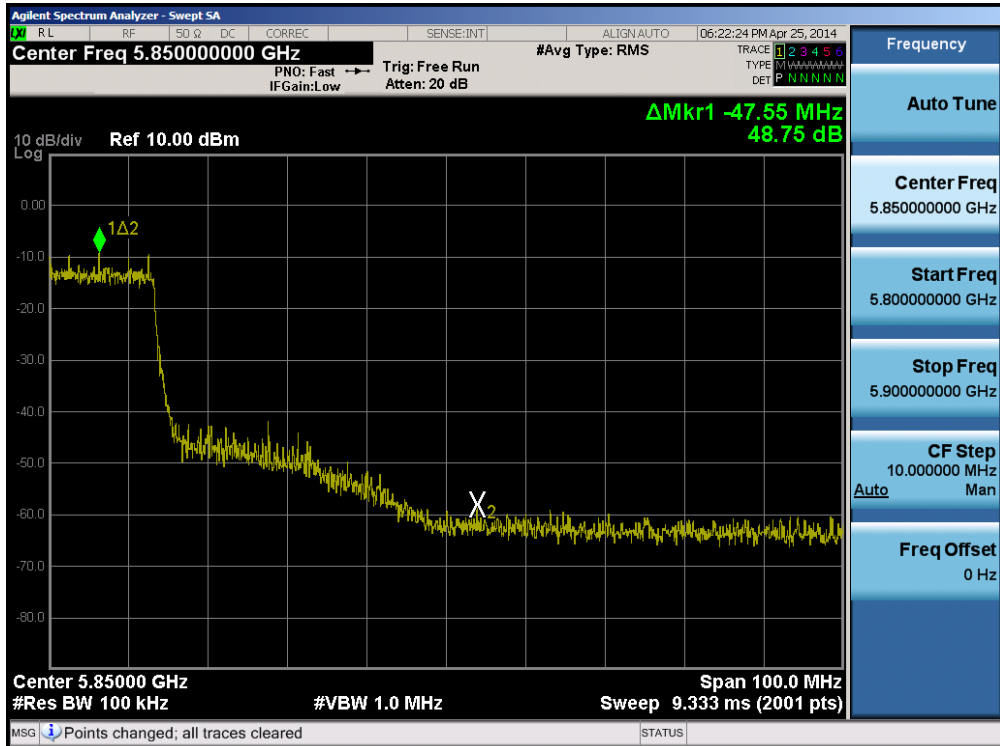


Plot 6-98. Band Edge Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 79 of 122

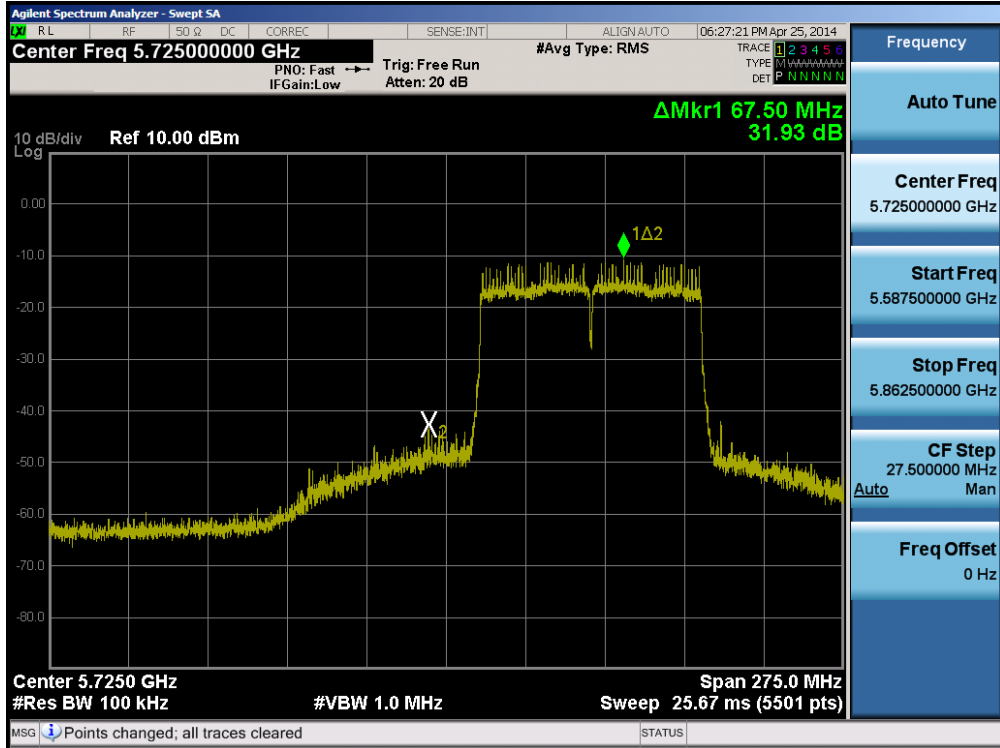

Plot 6-99. Band Edge Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

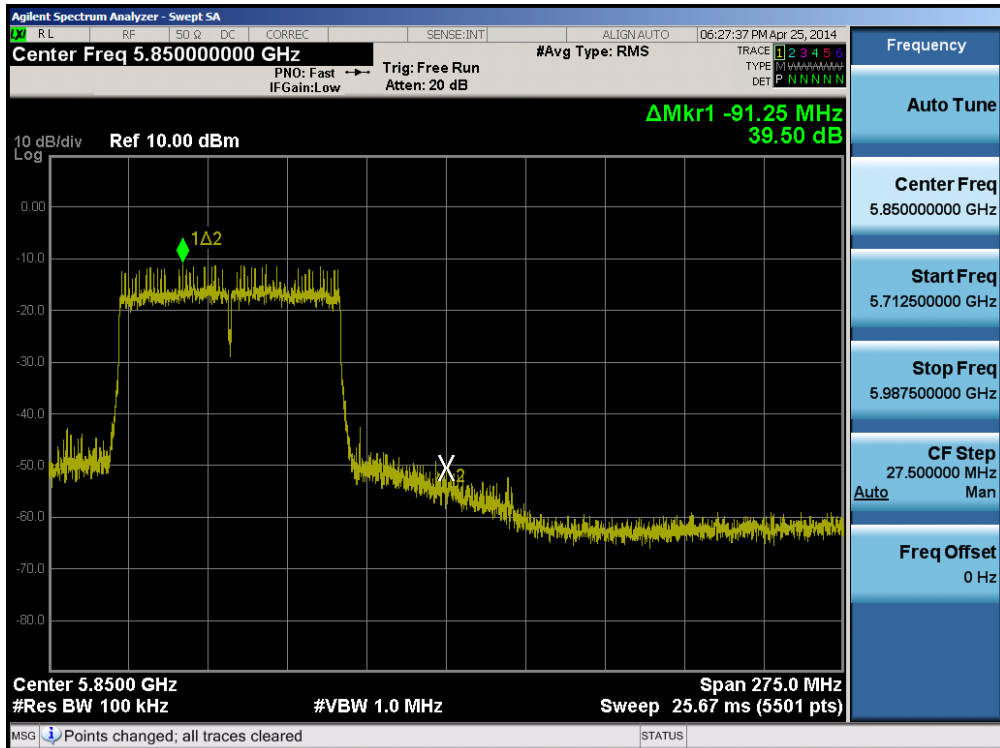

Plot 6-100. Band Edge Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 80 of 122

## 6.6 Conducted Spurious Emissions

§15.247(d)

### Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots, the EUT was investigated in all available data rates for “b”, “g”, “a”, “n”, and “ac” modes. The worst case spurious emissions for the 2.4GHz band were found while transmitting in “b” mode at 1 Mbps and are shown in the plots below. The worst case spurious emissions for the 5.8GHz band were found while transmitting in “a” mode at 6 Mbps and are shown in the plots below.

***The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.1 of KDB 558074 v03r01.***

### Test Procedure Used


KDB 558074 v03r01 – Section 11.3

### Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 25GHz for 2.4GHz frequencies and 40GHz for 5GHz frequencies (separated into two plots per channel)
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 6-6. Test Instrument & Measurement Setup**

### Test Notes


1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 30dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 81 of 122	

## Antenna-1 Conducted Spurious Emissions

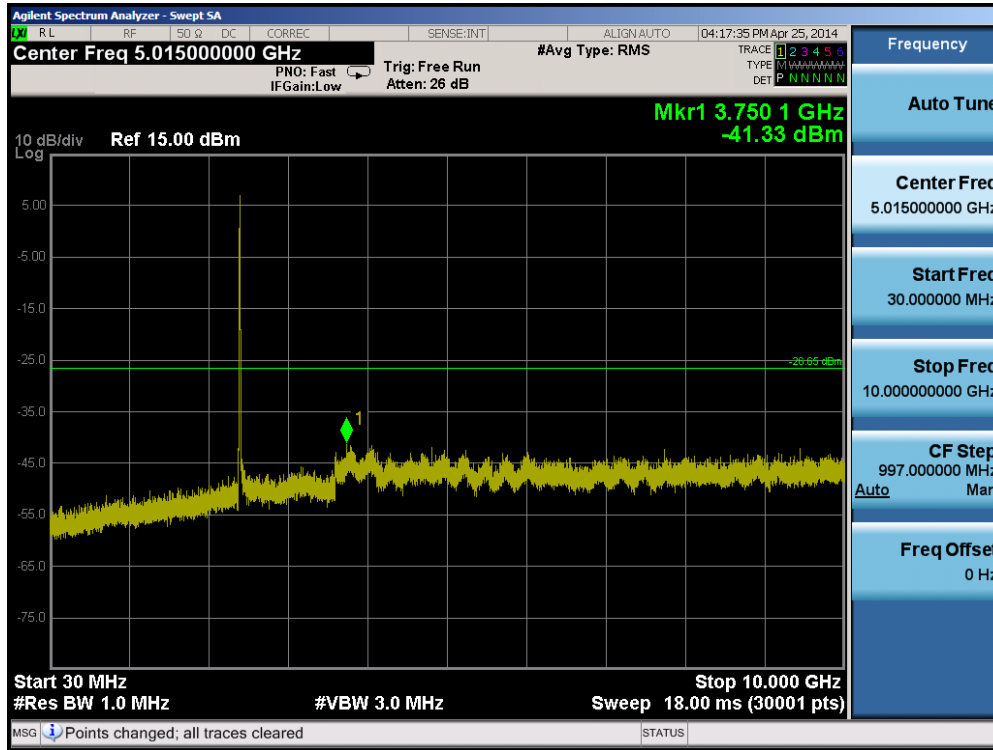


Plot 6-101. Conducted Spurious Plot (802.11b – Ch. 1)

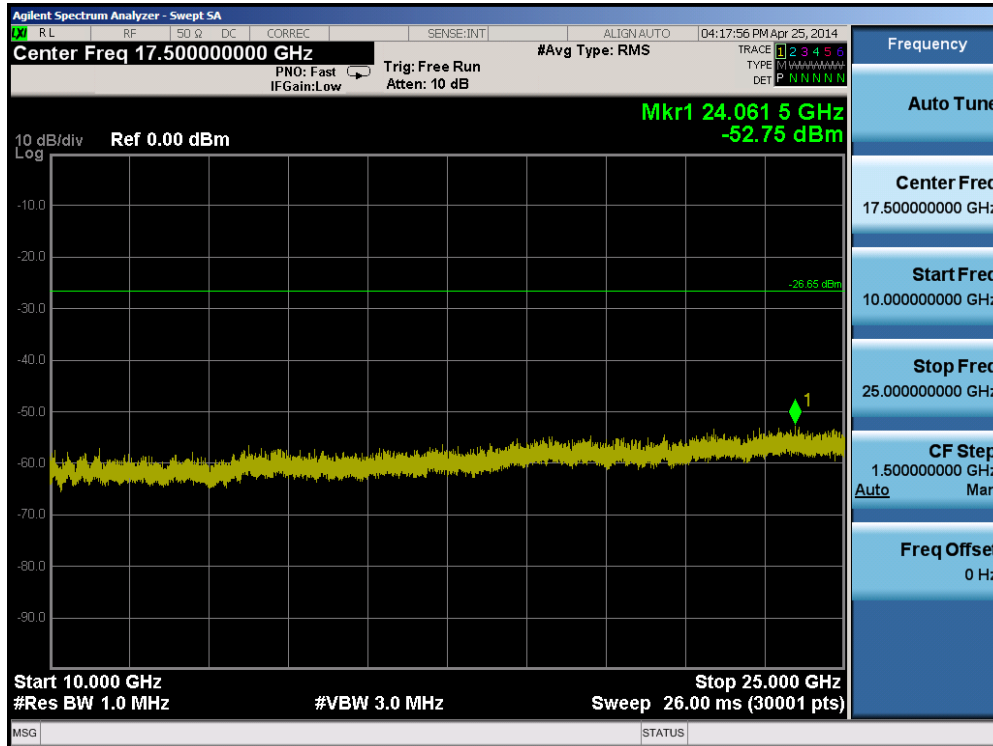


Plot 6-102. Conducted Spurious Plot (802.11b – Ch. 1)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 82 of 122

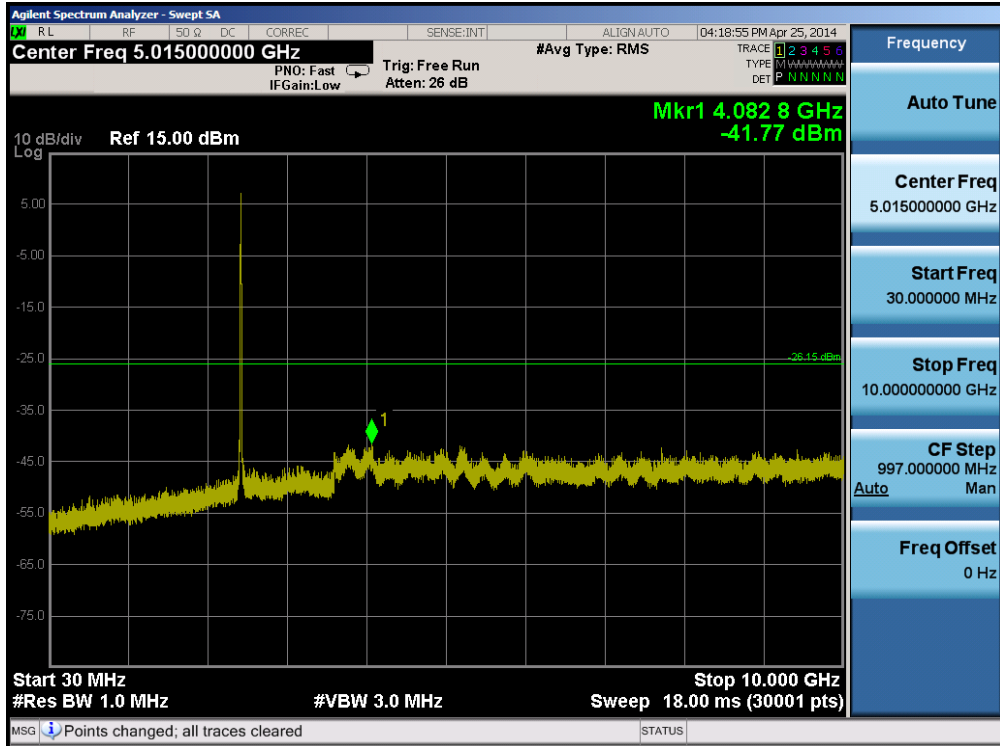


Plot 6-103. Conducted Spurious Plot (802.11b – Ch. 6)

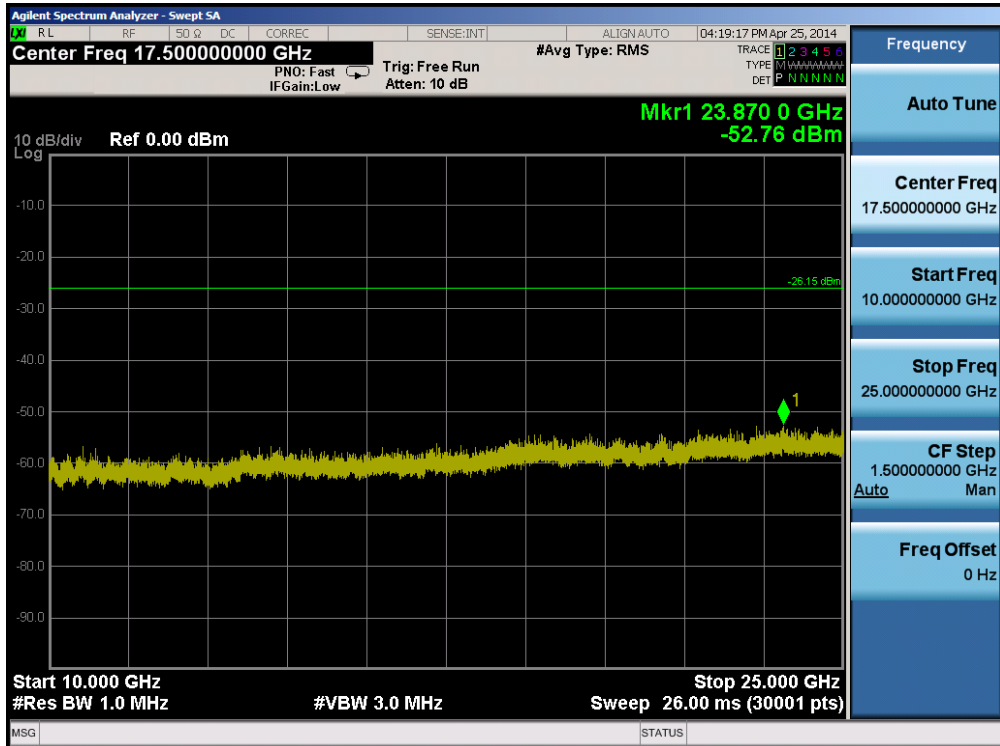


Plot 6-104. Conducted Spurious Plot (802.11b – Ch. 6)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 83 of 122

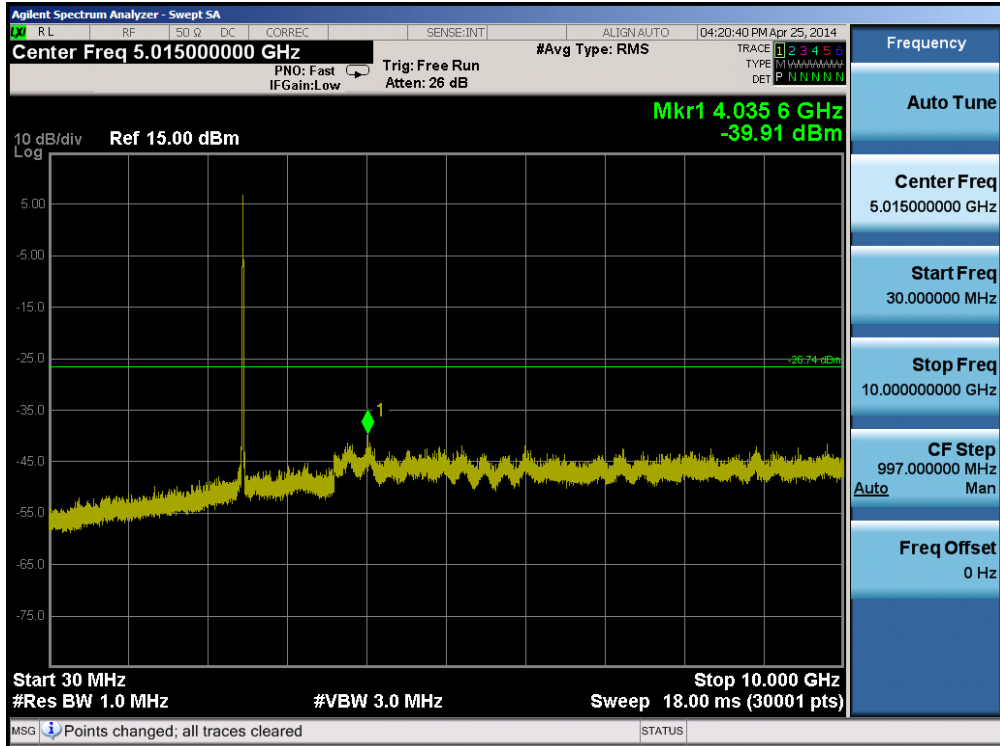

Plot 6-105. Conducted Spurious Plot (802.11b – Ch. 11)

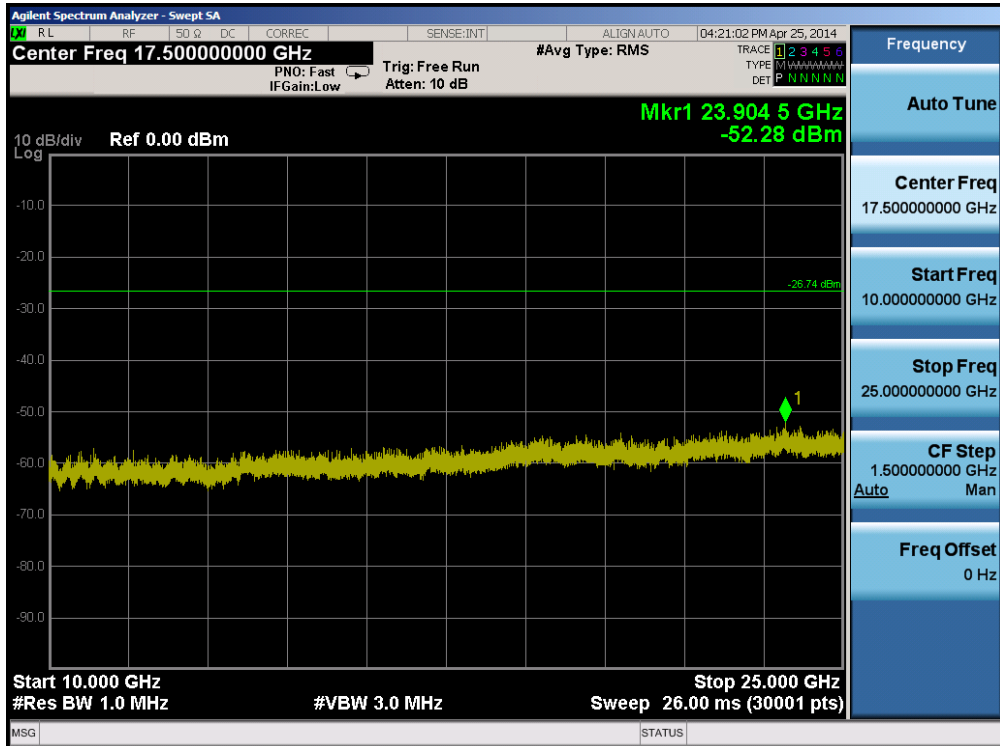


Plot 6-106. Conducted Spurious Plot (802.11b – Ch. 11)


FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 84 of 122





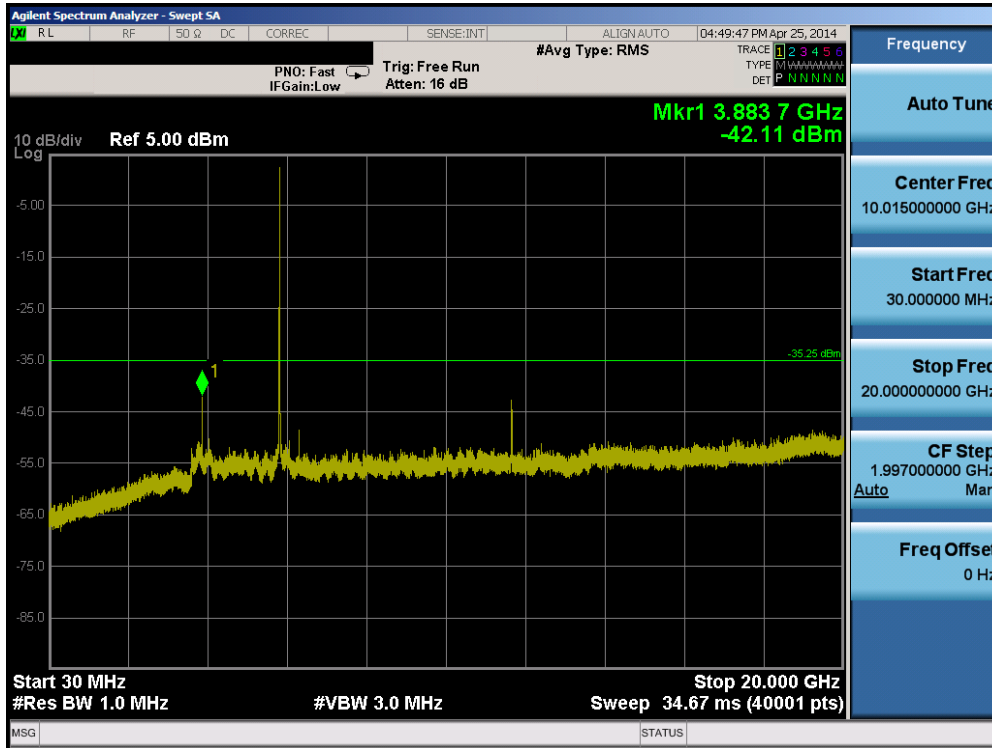

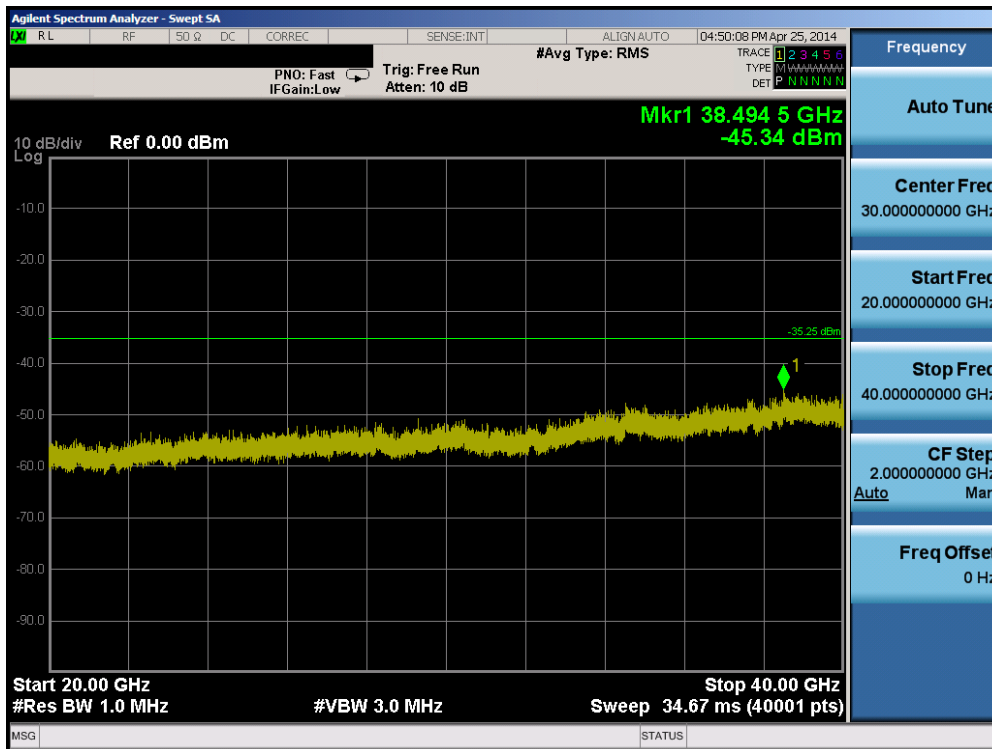


Plot 6-111. Conducted Spurious Plot (802.11a – Ch. 165)




Plot 6-112. Conducted Spurious Plot (802.11a – Ch. 165)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 87 of 122

## Antenna-2 Conducted Spurious Emissions

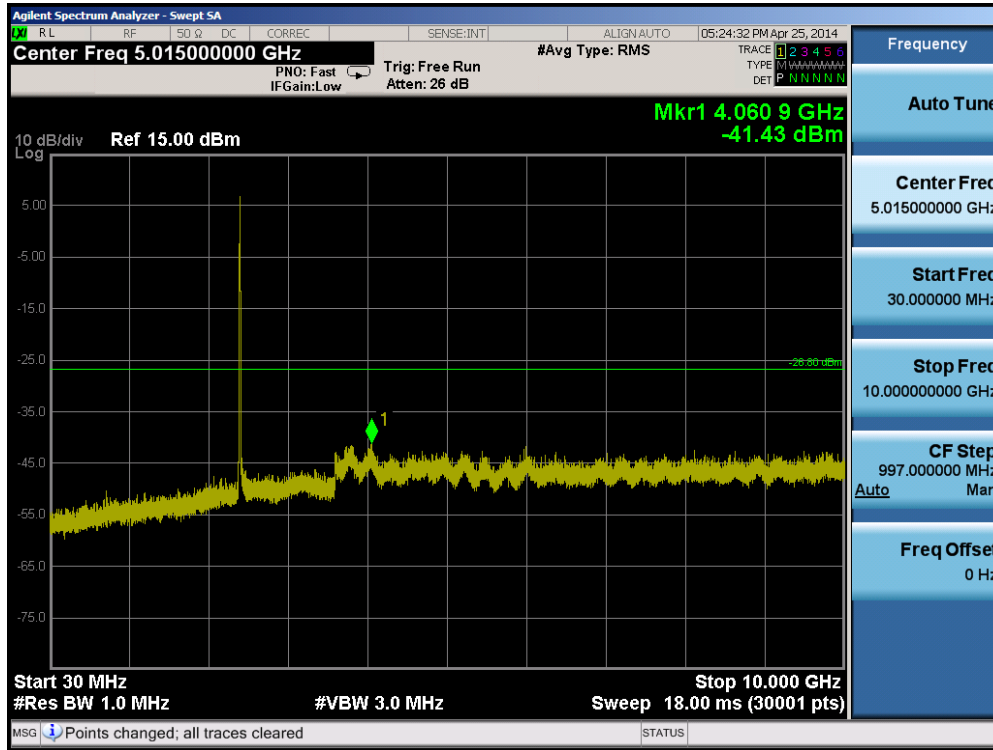


Plot 6-113. Conducted Spurious Plot (802.11b – Ch. 1)

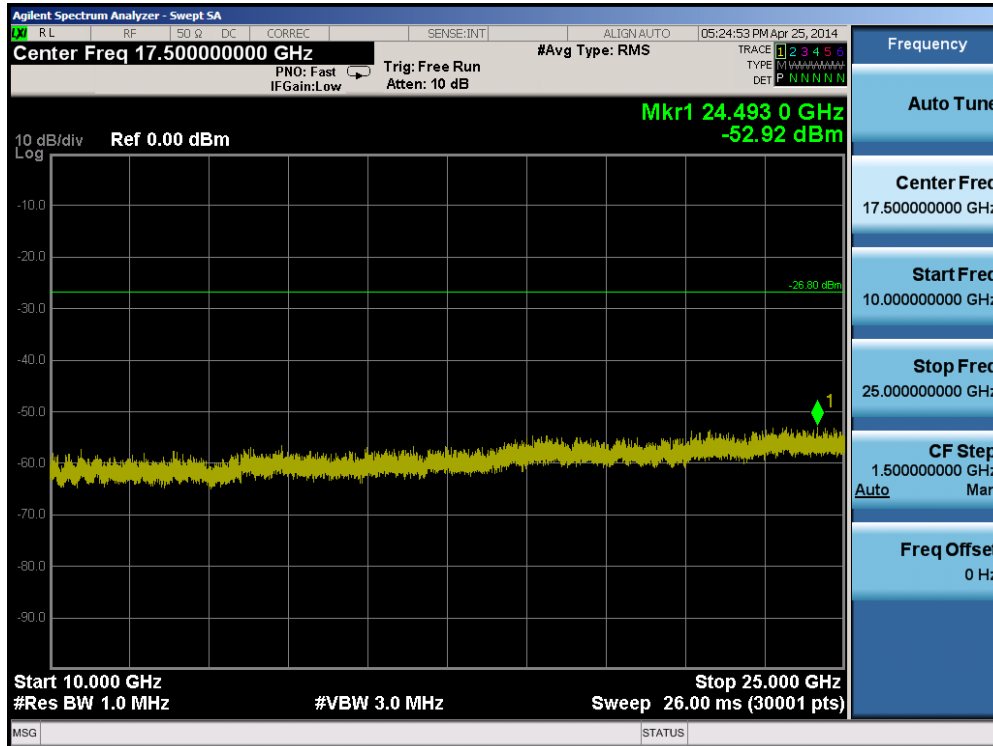


Plot 6-114. Conducted Spurious Plot (802.11b – Ch. 1)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 88 of 122

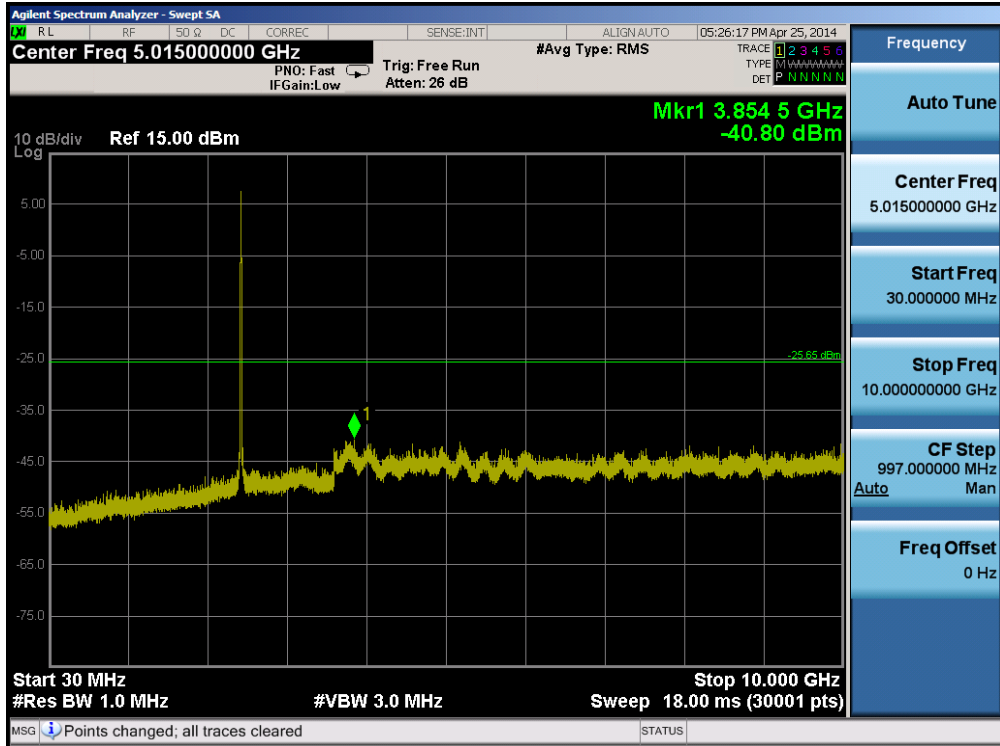


Plot 6-115. Conducted Spurious Plot (802.11b – Ch. 6)

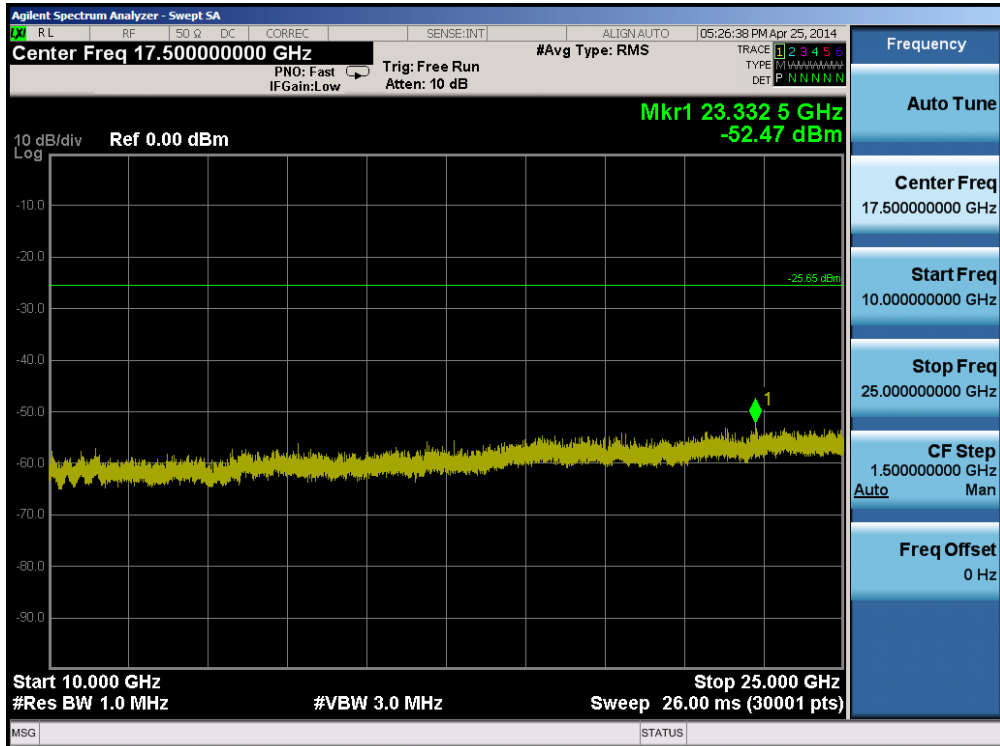


Plot 6-116. Conducted Spurious Plot (802.11b – Ch. 6)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 89 of 122

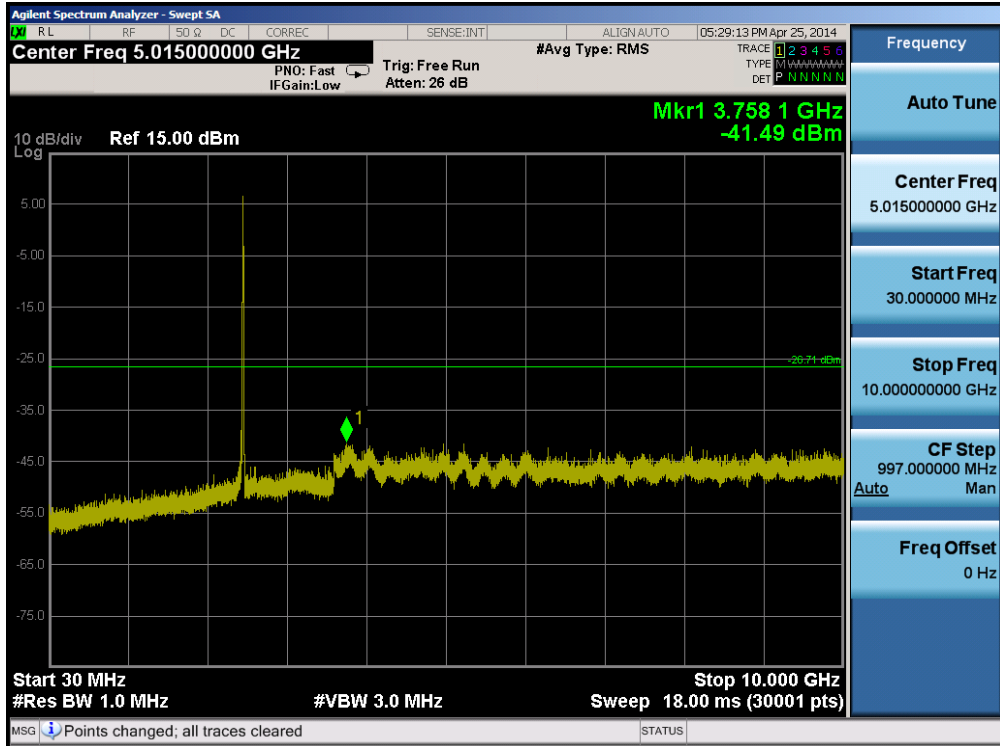


Plot 6-117. Conducted Spurious Plot (802.11b – Ch. 11)

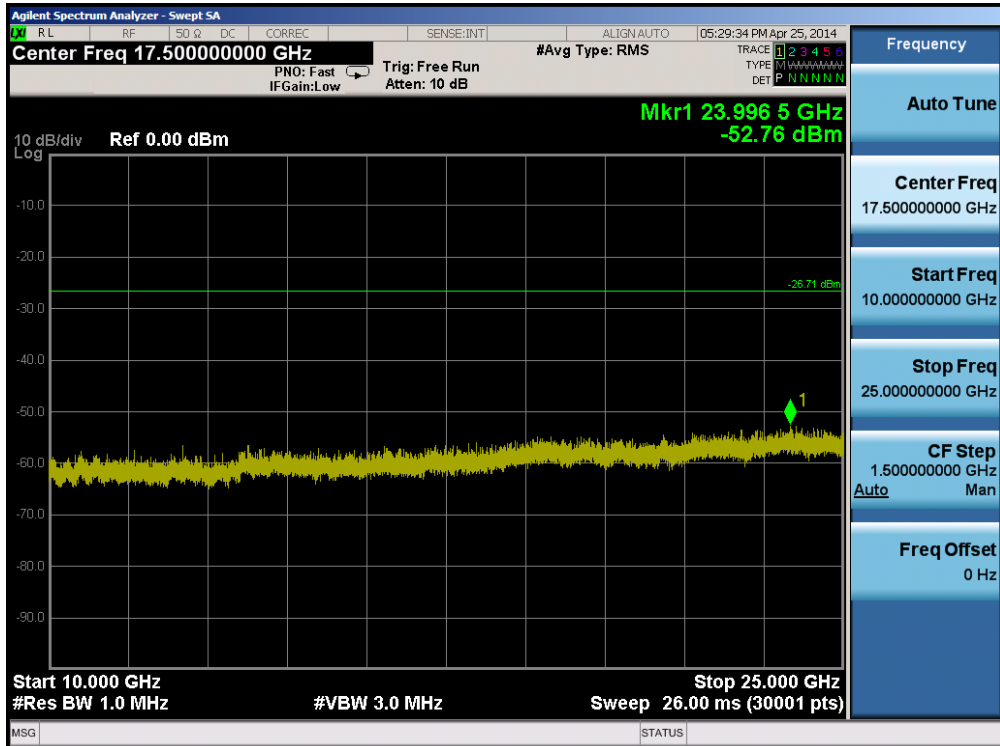


Plot 6-118. Conducted Spurious Plot (802.11b – Ch. 11)

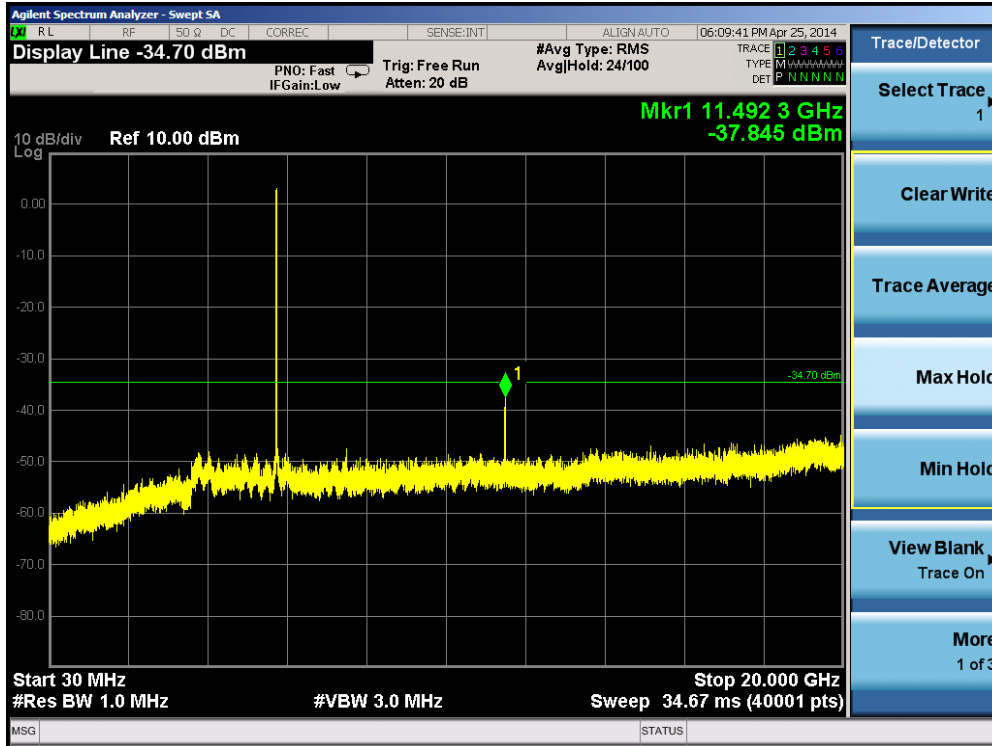

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 90 of 122

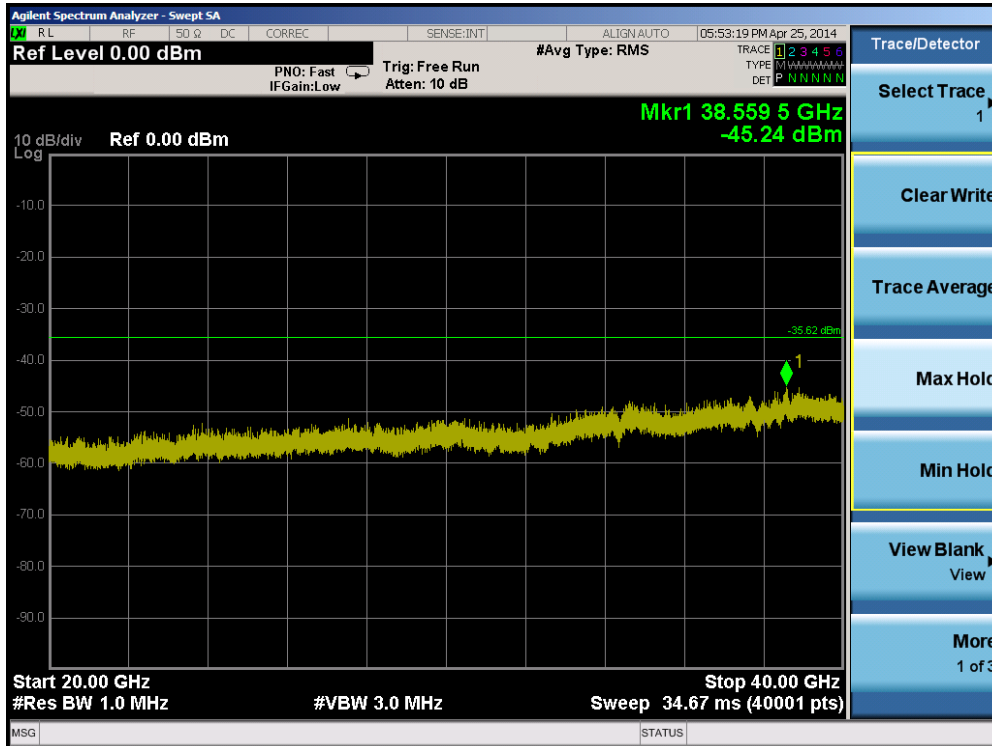


Plot 6-119. Conducted Spurious Plot (802.11a – Ch. 149)




Plot 6-120. Conducted Spurious Plot (802.11a – Ch. 149)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 91 of 122

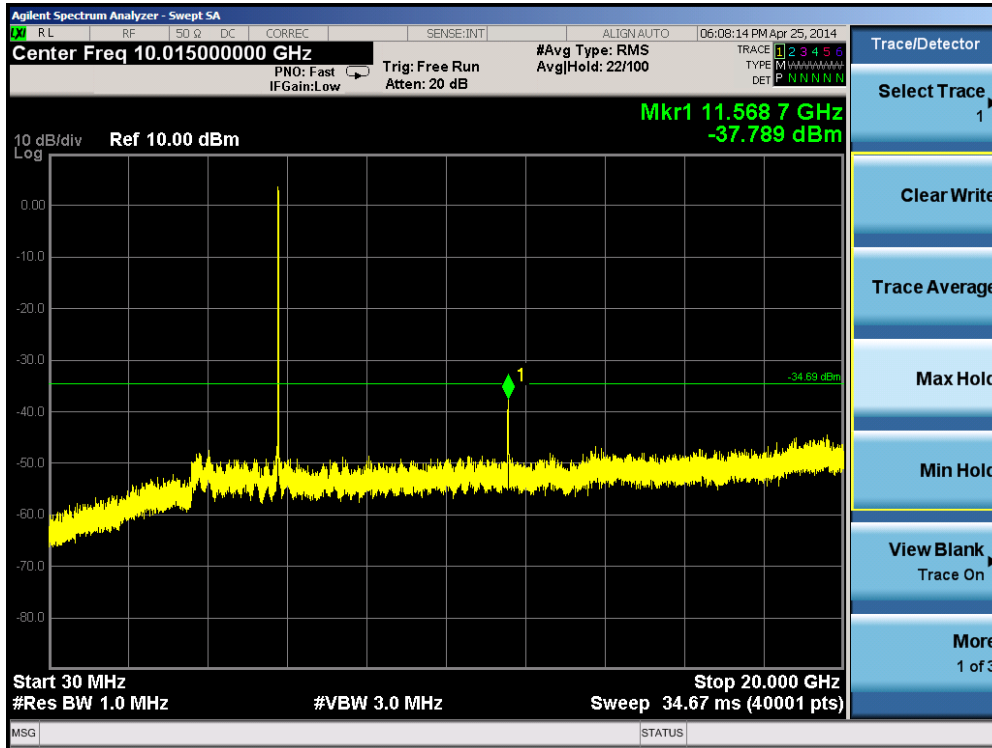


Plot 6-121. Conducted Spurious Plot (802.11a – Ch. 157)

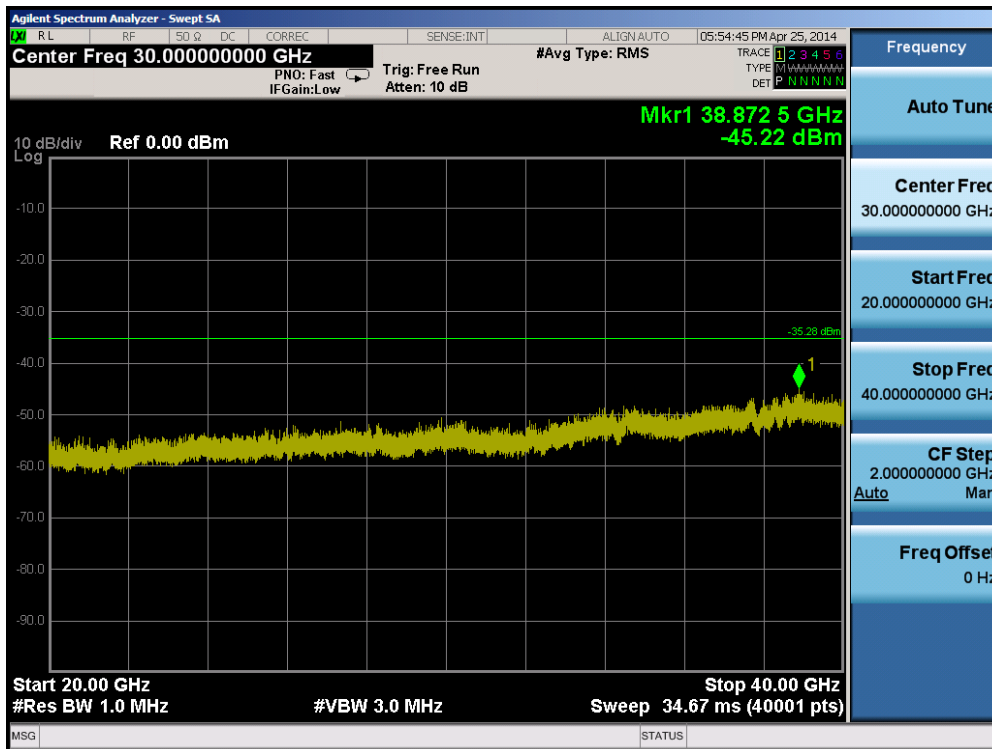


Plot 6-122. Conducted Spurious Plot (802.11a – Ch. 157)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 92 of 122

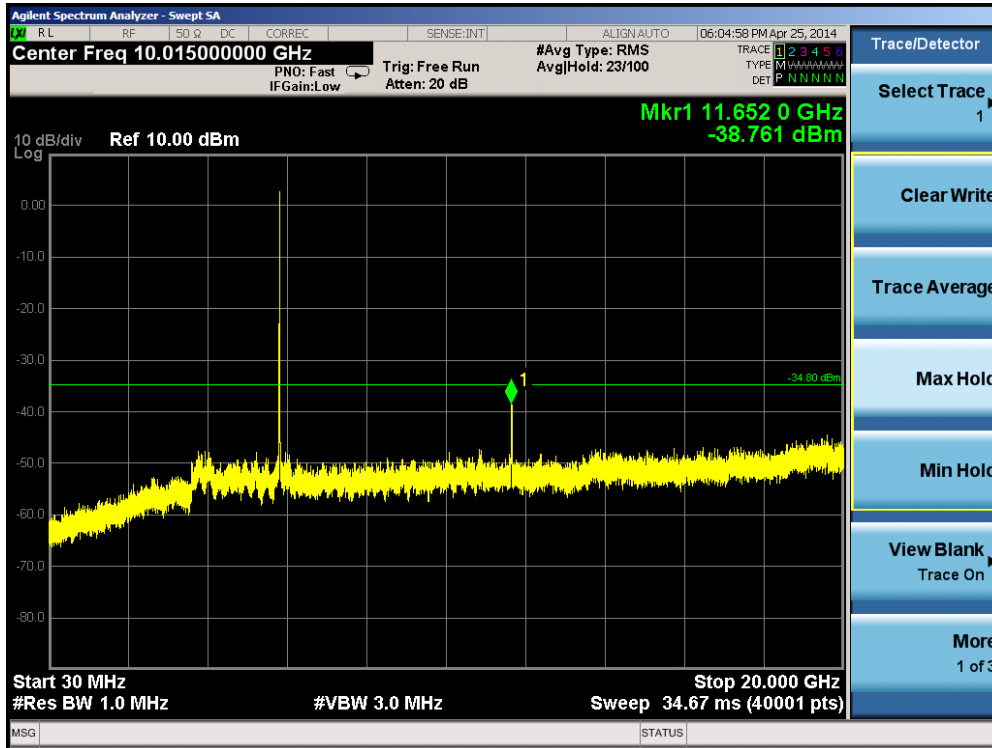

Plot 6-123. Conducted Spurious Plot (802.11a – Ch. 165)

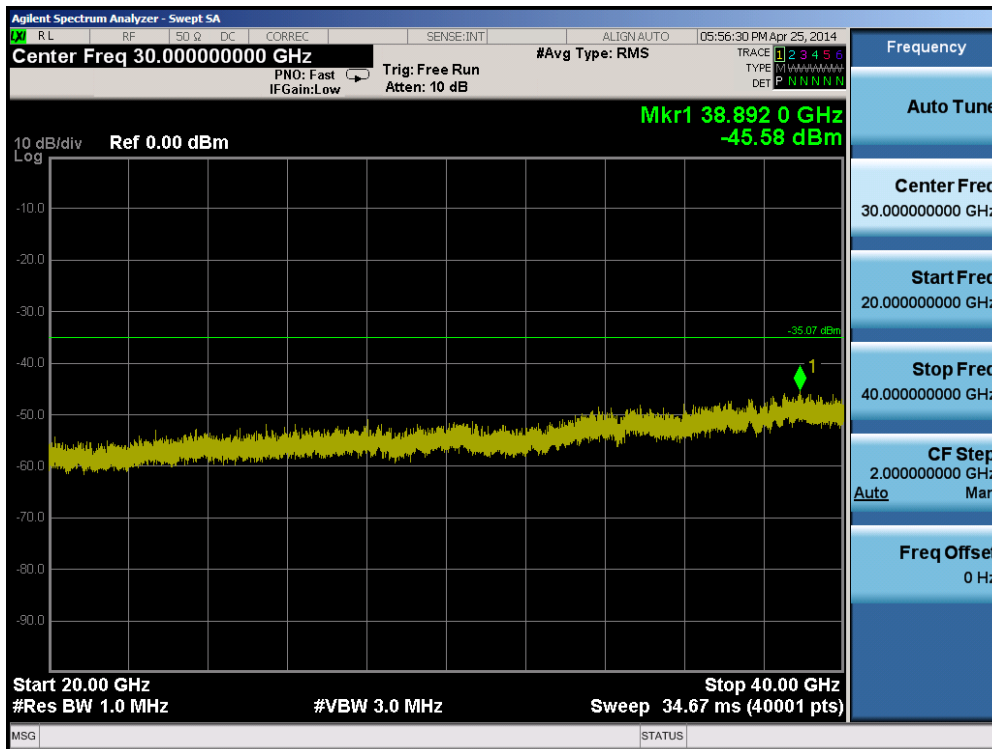

Plot 6-124. Conducted Spurious Plot (802.11a – Ch. 165)

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 93 of 122

## 6.7 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

**All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-31 per Section 15.209.**

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 6-31. Radiated Limits**



### Test Procedures Used

KDB 558074 v03r01 – Section 12.1, 12.7

### Test Settings

#### Average Field Strength Measurements per Section 12.2.5.1 of KDB 558074 v03r01

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces


FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 94 of 122	

**Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 v03r01**



1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Test Setup**

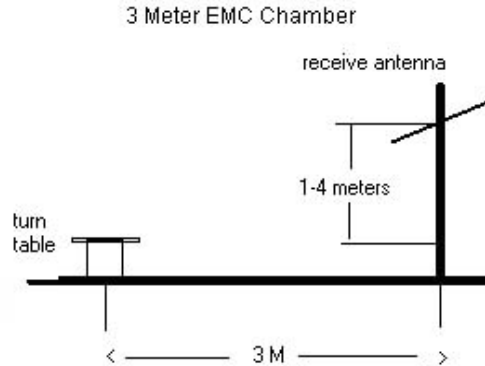The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-7. Test Instrument & Measurement Setup**

<b>FCC ID:</b> A3LSMT705M		<b>FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1404300884.A3L	<b>Test Dates:</b> 4/11 - 5/8/2014	<b>EUT Type:</b> Portable Tablet	Page 95 of 122	

## Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 v03r01 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-10.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.

## Sample Calculations



### Determining Spurious Emissions Levels

- Field Strength Level  $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

### Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Pre-amplifier Gain}$$

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 96 of 122	

## Antenna-1 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 01

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4824.00	-99.27	Avg	H	H	42.16	49.89	53.98	-4.08
4824.00	-92.86	Peak	H	H	42.16	56.30	73.98	-17.67
12060.00	-114.89	Avg	H	H	51.82	43.93	53.98	-10.05
12060.00	-103.59	Peak	H	H	51.82	55.23	73.98	-18.75

**Table 6-32. Radiated Measurements**

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	-98.40	Avg	H	H	42.37	50.97	53.98	-3.01
4874.00	-93.22	Peak	H	H	42.37	56.15	73.98	-17.83
7311.00	-114.84	Avg	H	H	43.89	36.04	53.98	-17.94
7311.00	-102.94	Peak	H	H	43.89	47.94	73.98	-26.04
12185.00	-115.83	Avg	H	H	52.47	43.64	53.98	-10.34
12185.00	-103.52	Peak	H	H	52.47	55.95	73.98	-18.03

**Table 6-33. Radiated Measurements**

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11



Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	-101.78	Avg	H	H	41.56	46.78	53.98	-7.20
4924.00	-94.48	Peak	H	H	41.76	54.28	73.98	-19.70
7386.00	-113.78	Avg	H	H	44.00	37.22	53.98	-16.76
7386.00	-102.31	Peak	H	H	44.00	48.69	73.98	-25.29
12310.00	-115.28	Avg	H	H	53.56	45.28	53.98	-8.70
12310.00	-102.97	Peak	H	H	53.56	57.59	73.98	-16.39

**Table 6-34. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
3830.00	-105.73	Avg	H	H	47.18	0.00	48.45	53.98	-5.53
3830.00	-99.85	Peak	H	H	47.18	0.00	54.33	73.98	-19.65
11490.00	-109.42	Avg	H	H	48.14	0.00	45.72	53.98	-8.26
11490.00	-97.27	Peak	H	H	48.14	0.00	57.87	73.98	-16.11
22980.00	-106.38	Avg	V	V	44.46	-9.54	35.54	53.98	-18.44
22980.00	-100.79	Peak	V	V	44.46	-9.54	41.13	73.98	-32.85

**Table 6-35. Radiated Measurements**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 98 of 122	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157



Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
3856.67	-109.09	Avg	H	H	47.22	0.00	45.12	53.98	-8.86
3856.67	-99.23	Peak	H	H	47.22	0.00	54.98	73.98	-19.00
11570.00	-110.43	Avg	H	H	48.39	0.00	44.96	53.98	-9.02
11570.00	-97.91	Peak	H	H	48.39	0.00	57.48	73.98	-16.50

**Table 6-36. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
3883.35	-105.34	Avg	H	H	48.42	0.00	50.08	53.98	-3.89
3883.35	-92.31	Peak	H	H	48.42	0.00	63.11	73.98	-10.86
11650.00	-109.58	Avg	H	H	48.42	0.00	45.84	53.98	-8.13
11650.00	-97.39	Peak	H	H	48.42	0.00	58.03	73.98	-15.94

**Table 6-37. Radiated Measurements**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 99 of 122	

## Antenna-2 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 01



Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4824.00	-100.57	Avg	H	H	42.16	48.59	53.98	-5.38
4824.00	-96.27	Peak	H	H	42.16	52.89	73.98	-21.08
12060.00	-115.75	Avg	H	H	51.82	43.07	53.98	-10.91
12060.00	-103.57	Peak	H	H	51.82	55.25	73.98	-18.73

Table 6-38. Radiated Measurements

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	-100.61	Avg	H	H	42.37	48.76	53.98	-5.22
4874.00	-97.34	Peak	H	H	42.37	52.03	73.98	-21.95
7311.00	-114.34	Avg	H	H	43.89	36.54	53.98	-17.44
7311.00	-102.07	Peak	H	H	43.89	48.81	73.98	-25.17
12185.00	-115.53	Avg	H	H	52.47	43.94	53.98	-10.04
12185.00	-105.52	Peak	H	H	52.47	53.95	73.98	-20.03

Table 6-39. Radiated Measurements

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 100 of 122	

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11



Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	-100.67	Avg	H	H	42.45	48.78	53.98	-5.20
4924.00	-96.54	Peak	H	H	42.45	52.91	73.98	-21.07
7386.00	-114.02	Avg	H	H	44.00	36.98	53.98	-17.00
7386.00	-101.91	Peak	H	H	44.00	49.09	73.98	-24.89
12310.00	-115.44	Avg	H	H	53.56	45.12	53.98	-8.86
12310.00	-102.41	Peak	H	H	53.56	58.15	73.98	-15.83

**Table 6-40. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
3830.00	-104.36	Avg	H	H	47.18	0.00	49.82	53.98	-4.16
3830.00	-97.55	Peak	H	H	47.18	0.00	56.63	73.98	-17.35
11490.00	-104.86	Avg	H	H	48.14	0.00	50.28	53.98	-3.70
11490.00	-92.28	Peak	H	H	48.14	0.00	62.86	73.98	-11.12
22980.00	-107.08	Avg	V	V	44.46	-9.54	34.84	53.98	-19.14
22980.00	-102.06	Peak	V	V	44.46	-9.54	39.86	73.98	-34.12

**Table 6-41. Radiated Measurements**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 101 of 122	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157



Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
3856.67	-104.78	Avg	H	H	47.22	0.00	49.43	53.98	-4.55
3856.67	-97.63	Peak	H	H	47.22	0.00	56.58	73.98	-17.40
11570.00	-104.67	Avg	H	H	48.39	0.00	50.72	53.98	-3.26
11570.00	-91.61	Peak	H	H	48.39	0.00	63.78	73.98	-10.20

**Table 6-42. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
3883.35	-105.88	Avg	H	H	47.25	0.00	48.37	53.98	-5.61
3883.35	-98.64	Peak	H	H	47.25	0.00	55.61	73.98	-18.37
11650.00	-104.62	Avg	H	H	48.42	0.00	50.80	53.98	-3.17
11650.00	-89.86	Peak	H	H	48.42	0.00	65.56	73.98	-8.41

**Table 6-43. Radiated Measurements**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 102 of 122	

## MIMO Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 01



Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4824.00	-109.76	Avg	H	H	42.16	39.40	53.98	-14.57
4824.00	-97.59	Peak	H	H	42.16	51.57	73.98	-22.40
12060.00	-114.32	Avg	H	H	51.82	44.50	53.98	-9.48
12060.00	-101.33	Peak	H	H	51.82	57.49	73.98	-16.49

**Table 6-44. Radiated Measurements**

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
4874.00	-111.39	Avg	H	H	42.37	37.98	53.98	-16.00
4874.00	-99.05	Peak	H	H	42.37	50.32	73.98	-23.66
7311.00	-114.74	Avg	H	H	43.89	36.14	53.98	-17.84
7311.00	-102.30	Peak	H	H	43.89	48.58	73.98	-25.40
12185.00	-115.94	Avg	H	H	52.47	43.53	53.98	-10.45
12185.00	-103.62	Peak	H	H	52.47	55.85	73.98	-18.13

**Table 6-45. Radiated Measurements**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 103 of 122	

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11



Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4924.00	-110.35	Avg	H	H	42.45	39.10	53.98	-14.88
4924.00	-98.38	Peak	H	H	42.45	51.07	73.98	-22.91
7386.00	-114.08	Avg	H	H	44.00	36.92	53.98	-17.06
7386.00	-102.28	Peak	H	H	44.00	48.72	73.98	-25.26
12310.00	-115.45	Avg	H	H	53.56	45.11	53.98	-8.87
12310.00	-103.46	Peak	H	H	53.56	57.10	73.98	-16.88

**Table 6-46. Radiated Measurements**

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS8  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
3830.00	-105.27	Avg	H	H	47.18	0.00	48.91	53.98	-5.07
3830.00	-99.73	Peak	H	H	47.18	0.00	54.45	73.98	-19.53
11490.00	-116.84	Avg	H	H	48.14	0.00	38.30	53.98	-15.68
11490.00	-104.95	Peak	H	H	48.14	0.00	50.19	73.98	-23.79
22980.00	-103.60	Avg	V	V	44.46	-9.54	38.32	53.98	-15.66
22980.00	-100.11	Peak	V	V	44.46	-9.54	41.81	73.98	-32.17

**Table 6-47. Radiated Measurements**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 104 of 122	

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS8  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157



Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
3856.67	-105.99	Avg	H	H	47.22	0.00	48.22	53.98	-5.76
3856.67	-99.56	Peak	H	H	47.22	0.00	54.65	73.98	-19.33
11570.00	-116.83	Avg	H	H	48.39	0.00	38.56	53.98	-15.42
11570.00	-104.38	Peak	H	H	48.39	0.00	51.01	73.98	-22.97

**Table 6-48. Radiated Measurements**

Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS8  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
3883.35	-106.06	Avg	H	H	47.25	0.00	48.19	53.98	-5.79
3883.35	-99.83	Peak	H	H	47.25	0.00	54.42	73.98	-19.56
11650.00	-116.37	Avg	H	H	48.42	0.00	39.05	53.98	-14.92
11650.00	-103.95	Peak	H	H	48.42	0.00	51.47	73.98	-22.50

**Table 6-49. Radiated Measurements**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 105 of 122	

## 6.8 Radiated Restricted Band Edge Measurements

~~§15.205~~ §15.209

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz

Channel: 1

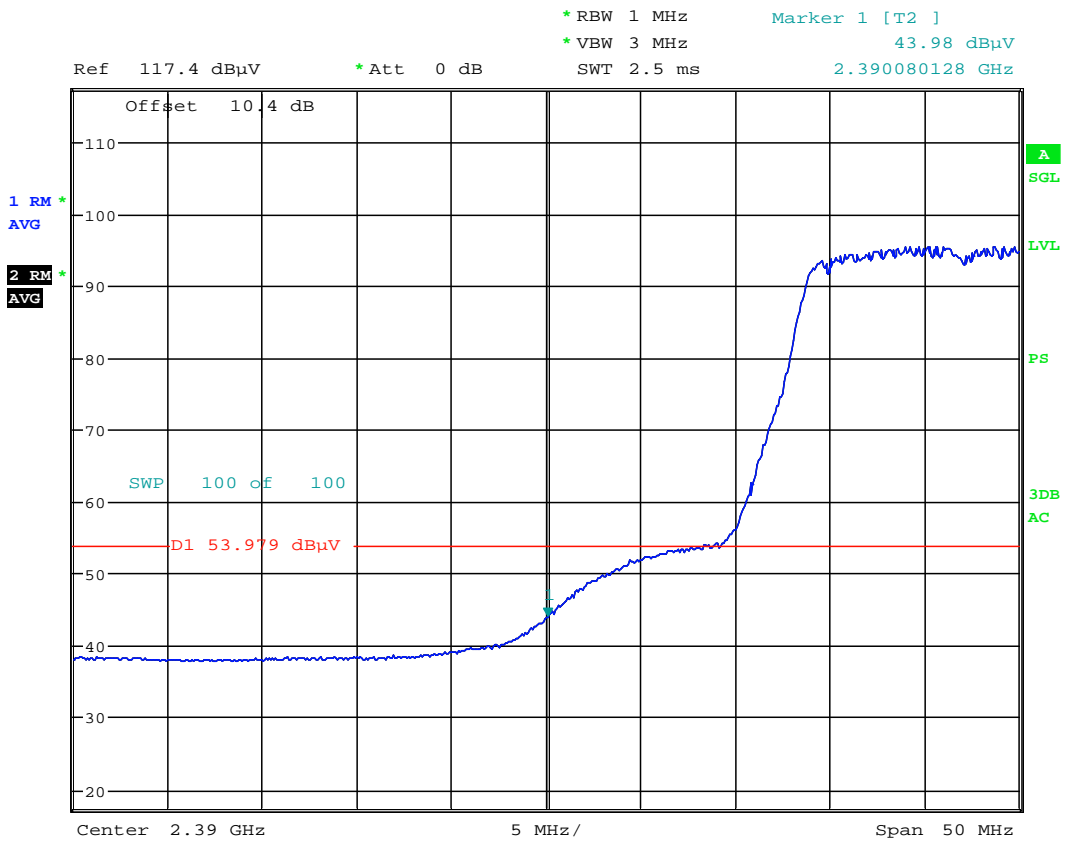


Date: 7.MAY.2014 21:21:58

**Plot 6-125. Radiated Restricted Lower Band Edge Measurement (Average)**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 106 of 122	

# Radiated Restricted Band Edge Measurements

§15.205 §15.209

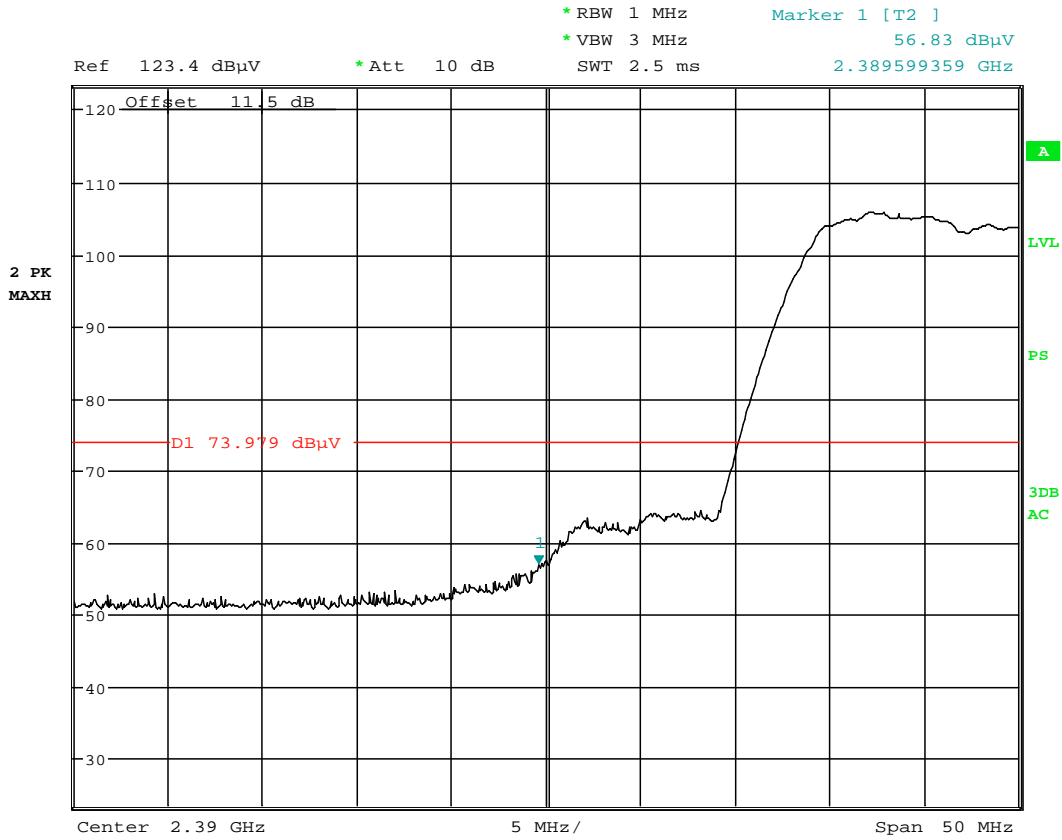

Date: 18.APR.2014 16:09:42

**Plot 6-126. Radiated Restricted Lower Band Edge Measurement (Peak)**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 107 of 122	

# Radiated Restricted Band Edge Measurements

## \$15.205 \$15.209


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

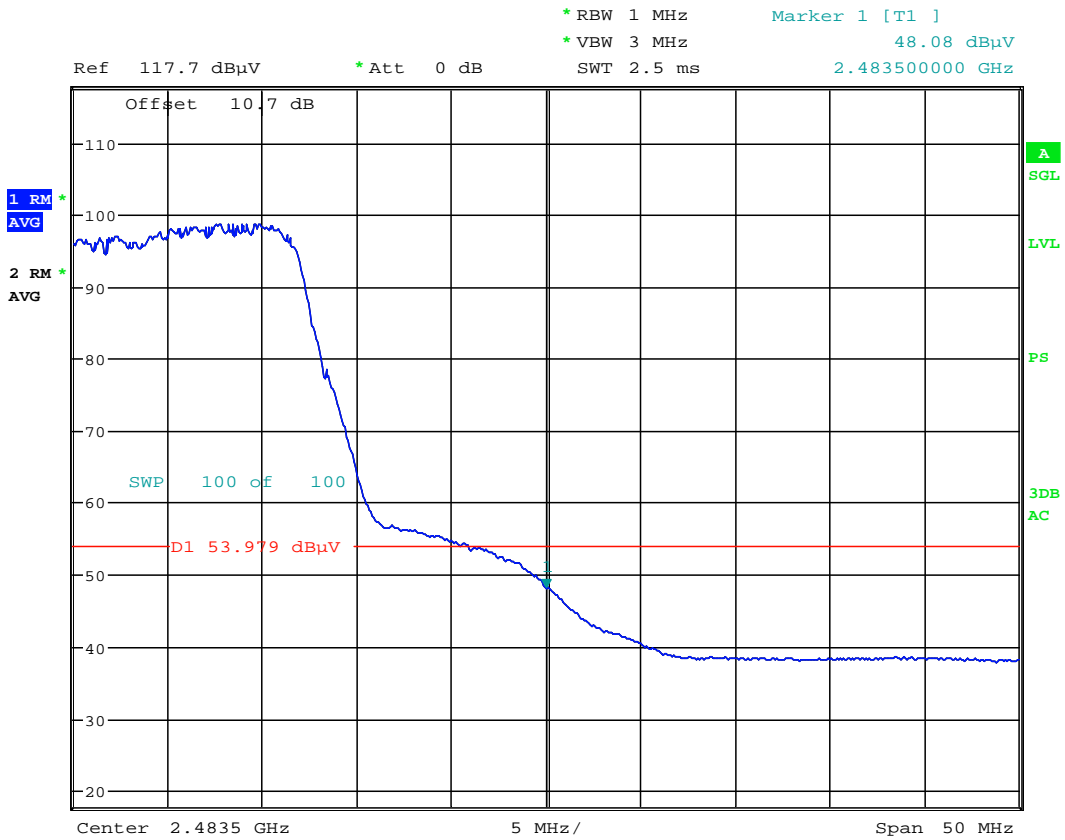


Date: 7.MAY.2014 21:41:42

**Plot 6-127. Radiated Restricted Upper Band Edge Measurement (Average)**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 108 of 122	

# Radiated Restricted Band Edge Measurements

## §15.205 §15.209

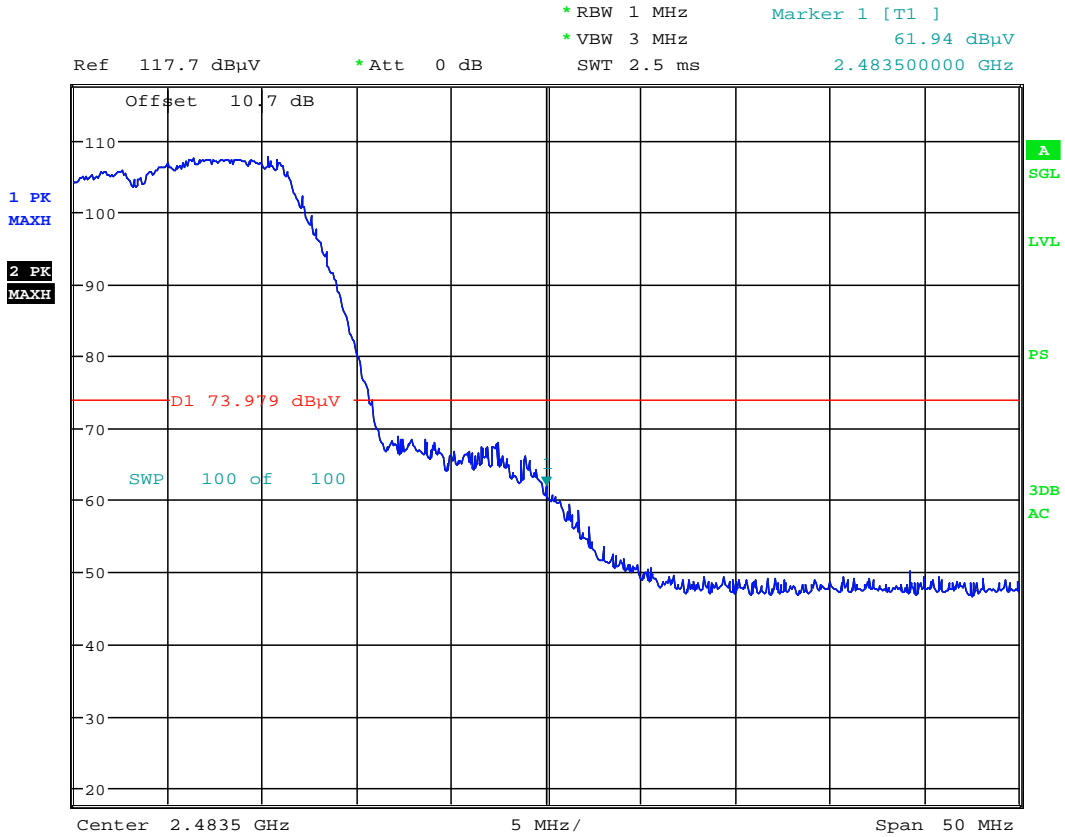

Date: 7.MAY.2014 21:42:31

**Plot 6-128. Radiated Restricted Upper Band Edge Measurement (Peak)**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 109 of 122	

## 6.9 Antenna-2 Radiated Restricted Band Edge Measurements

~~§15.205~~ §15.209

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz

Channel: 1

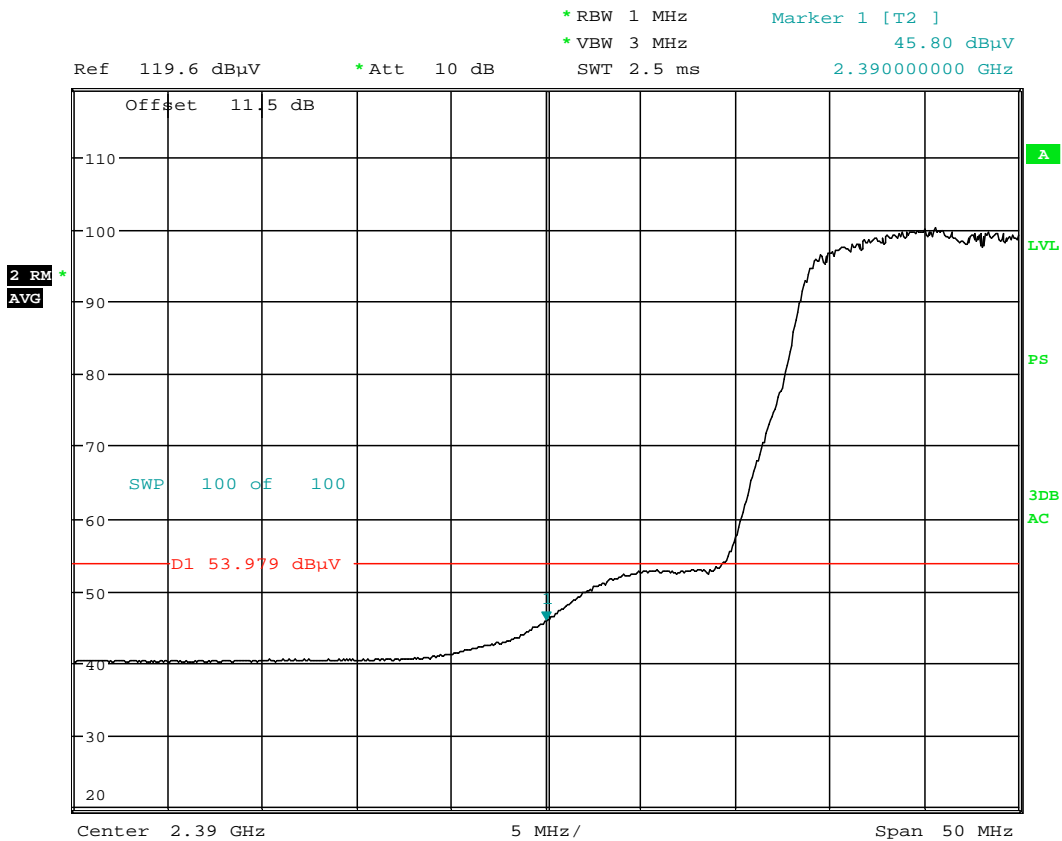


Date: 18.APR.2014 16:20:35

**Plot 6-129. Radiated Restricted Lower Band Edge Measurement (Average)**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 110 of 122	

# Radiated Restricted Band Edge Measurements

## §15.205 §15.209

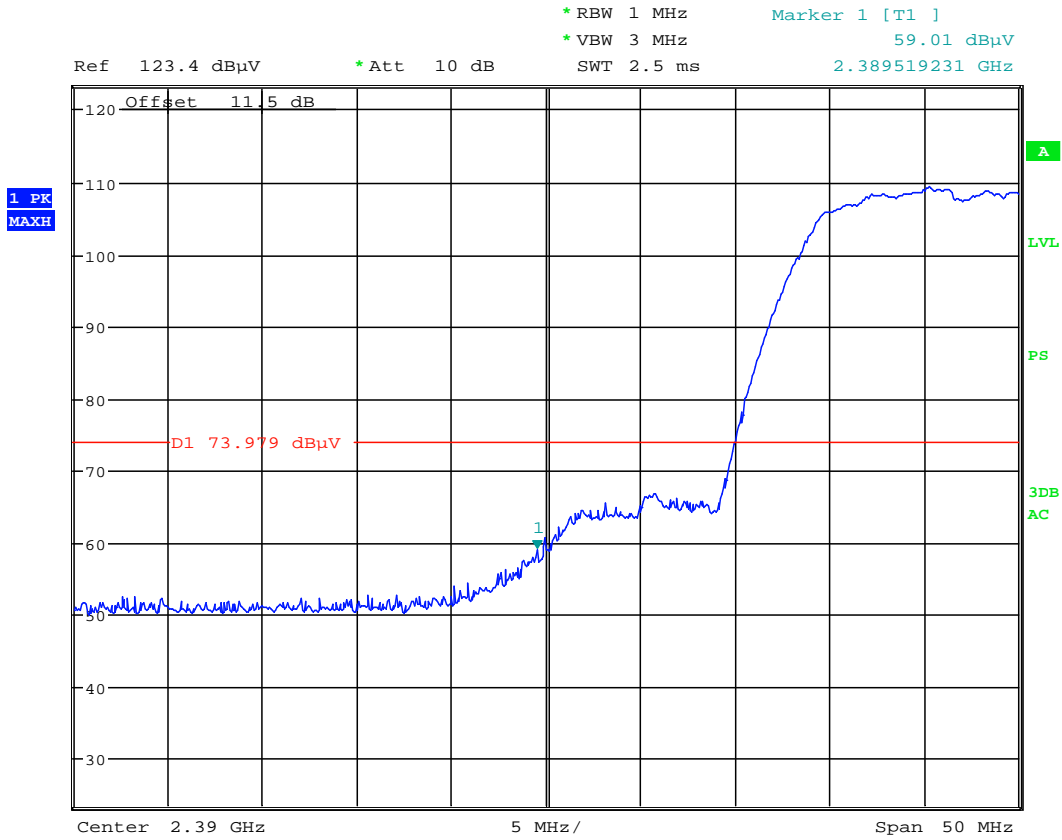

Date: 18.APR.2014 16:21:05

**Plot 6-130. Radiated Restricted Lower Band Edge Measurement (Peak)**

<b>FCC ID:</b> A3LSMT705M		<b>FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1404300884.A3L	<b>Test Dates:</b> 4/11 - 5/8/2014	<b>EUT Type:</b> Portable Tablet	Page 111 of 122	

# Radiated Restricted Band Edge Measurements

## §15.205 §15.209


Worst Case Mode: 802.11g

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

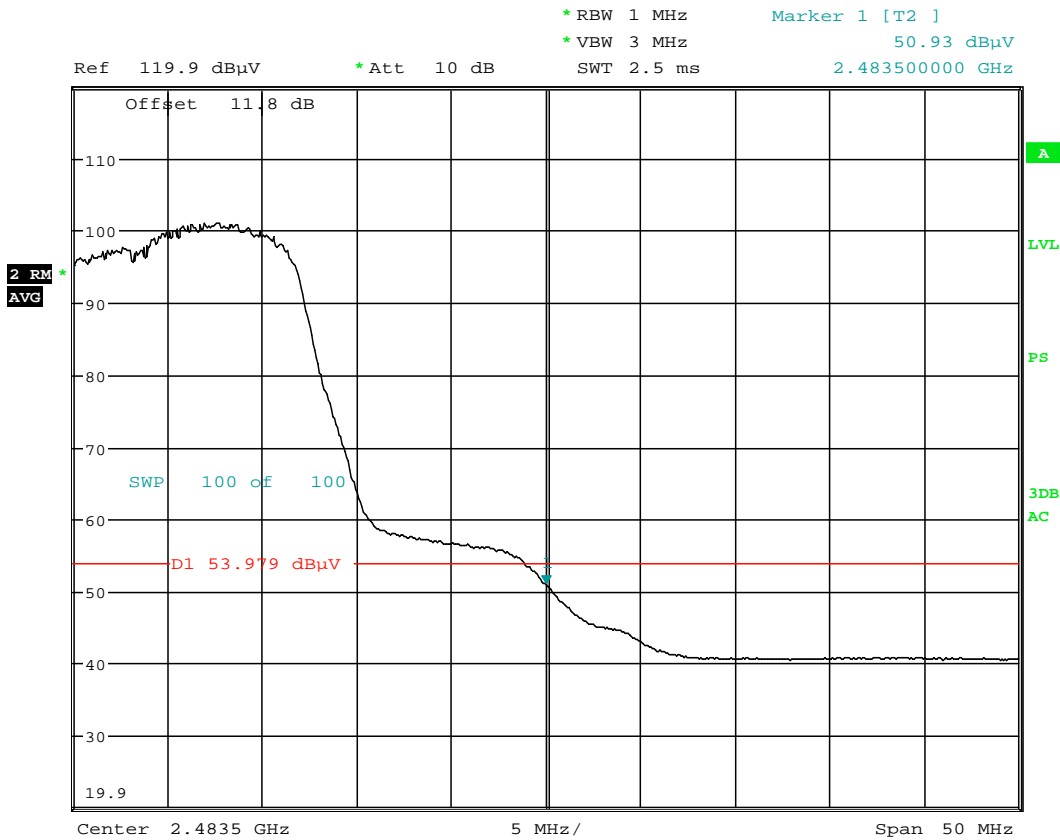


Date: 18.APR.2014 16:25:15

**Plot 6-131. Radiated Restricted Upper Band Edge Measurement (Average)**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 112 of 122	

# Radiated Restricted Band Edge Measurements

## §15.205 §15.209

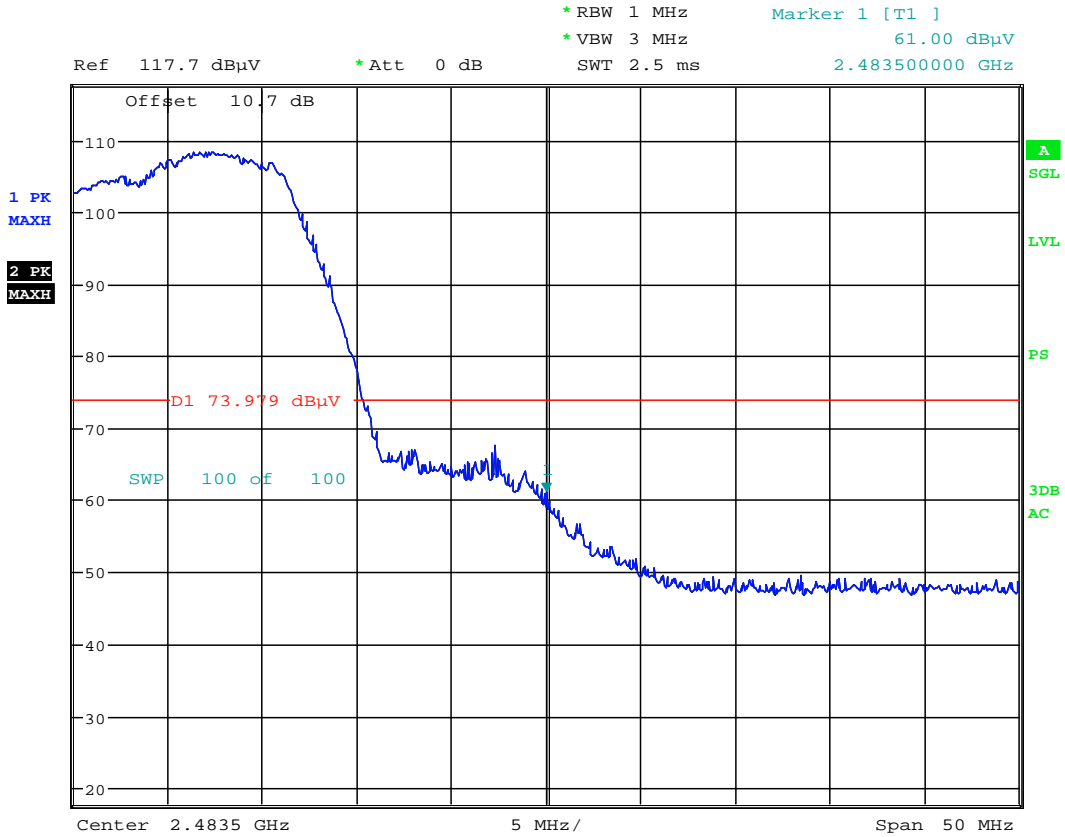

Date: 7.MAY.2014 21:47:52

**Plot 6-132. Radiated Restricted Upper Band Edge Measurement (Peak)**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 113 of 122	

## 6.10 MIMO Radiated Restricted Band Edge Measurements

~~§15.205~~ §15.209

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz

Channel: 1

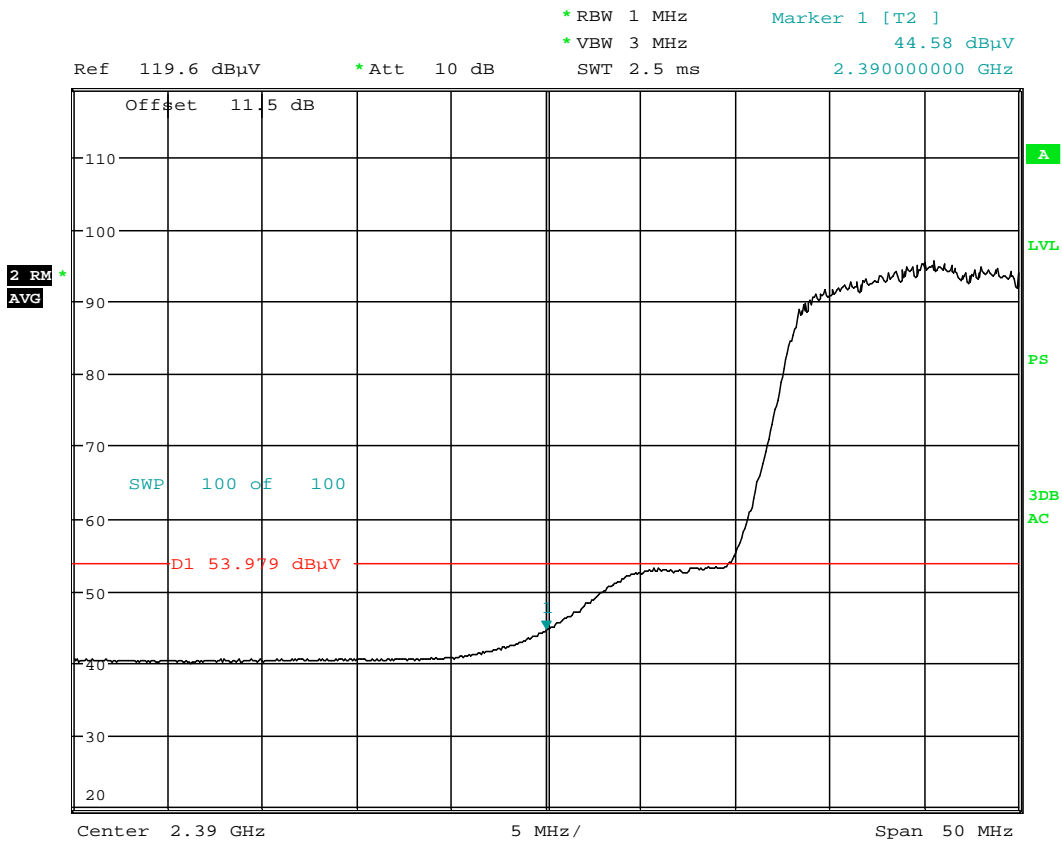


Date: 18.APR.2014 16:34:48

**Plot 6-133. Radiated Restricted Lower Band Edge Measurement (Average)**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 114 of 122	

# Radiated Restricted Band Edge Measurements

§15.205 §15.209

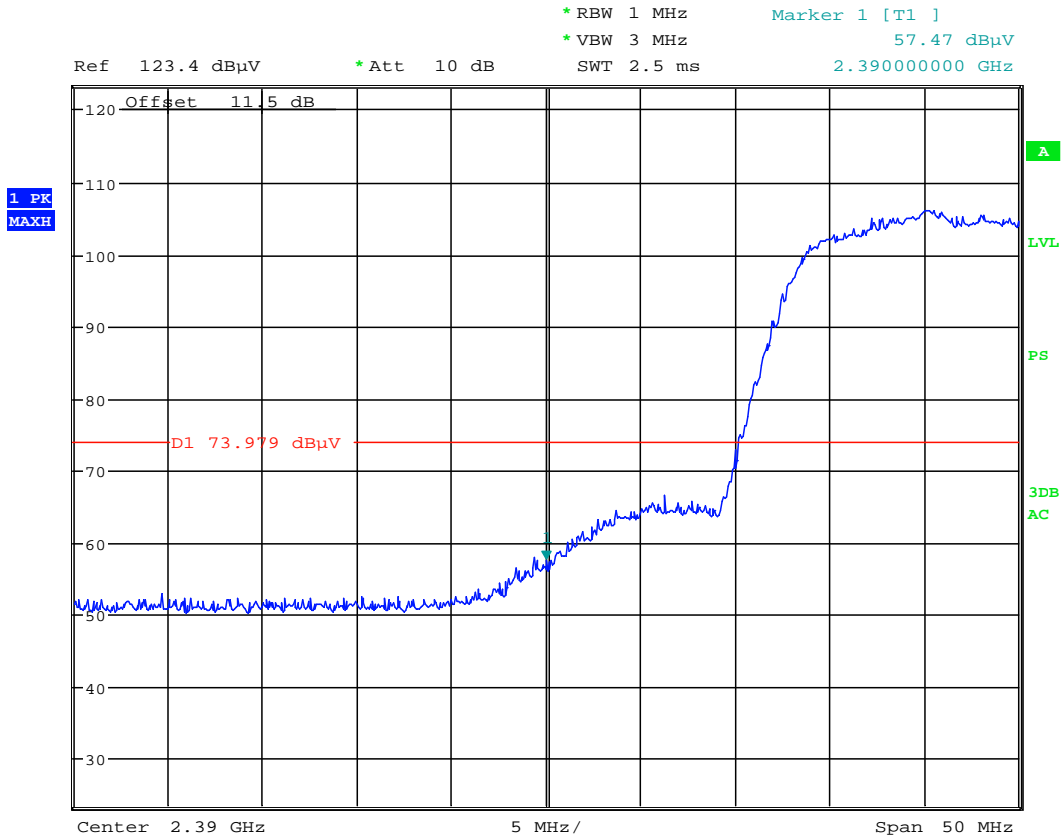

Date: 18.APR.2014 16:35:31

**Plot 6-134. Radiated Restricted Lower Band Edge Measurement (Peak)**

<b>FCC ID:</b> A3LSMT705M		<b>FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1404300884.A3L	<b>Test Dates:</b> 4/11 - 5/8/2014	<b>EUT Type:</b> Portable Tablet	Page 115 of 122	

# Radiated Restricted Band Edge Measurements

## §15.205 §15.209


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz

Channel: 11

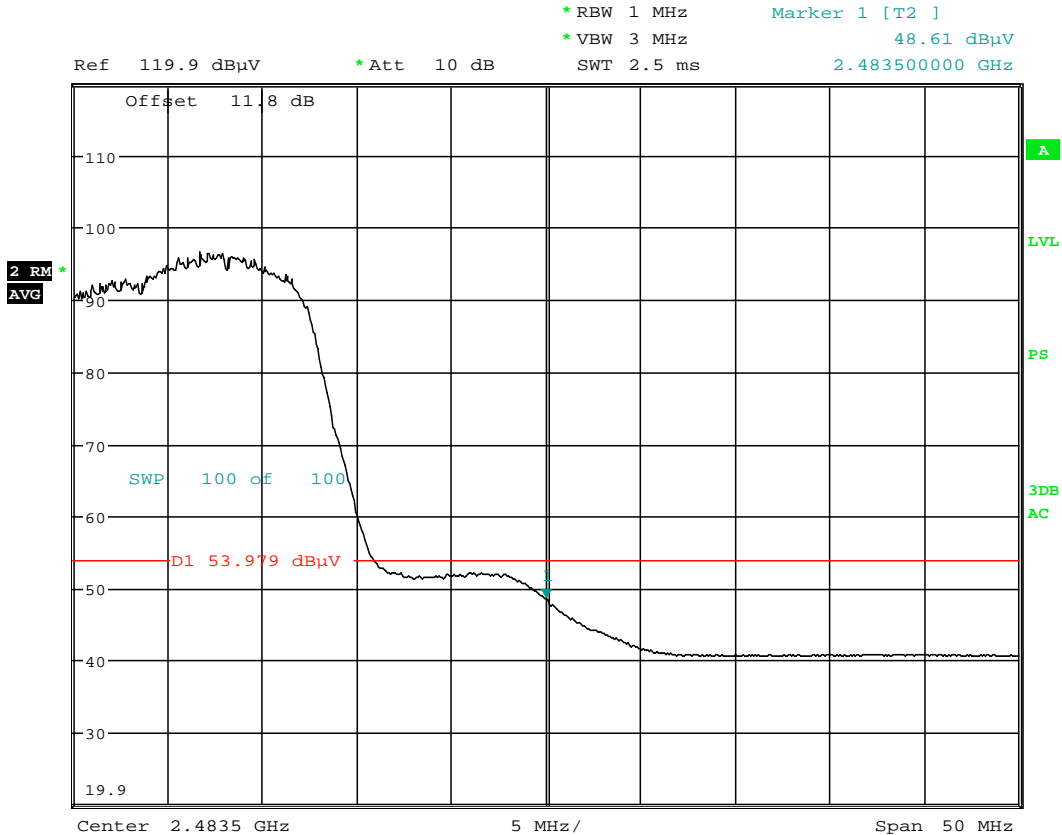


Date: 18.APR.2014 16:30:26

**Plot 6-135. Radiated Restricted Upper Band Edge Measurement (Average)**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 116 of 122	

# Radiated Restricted Band Edge Measurements

## §15.205 §15.209

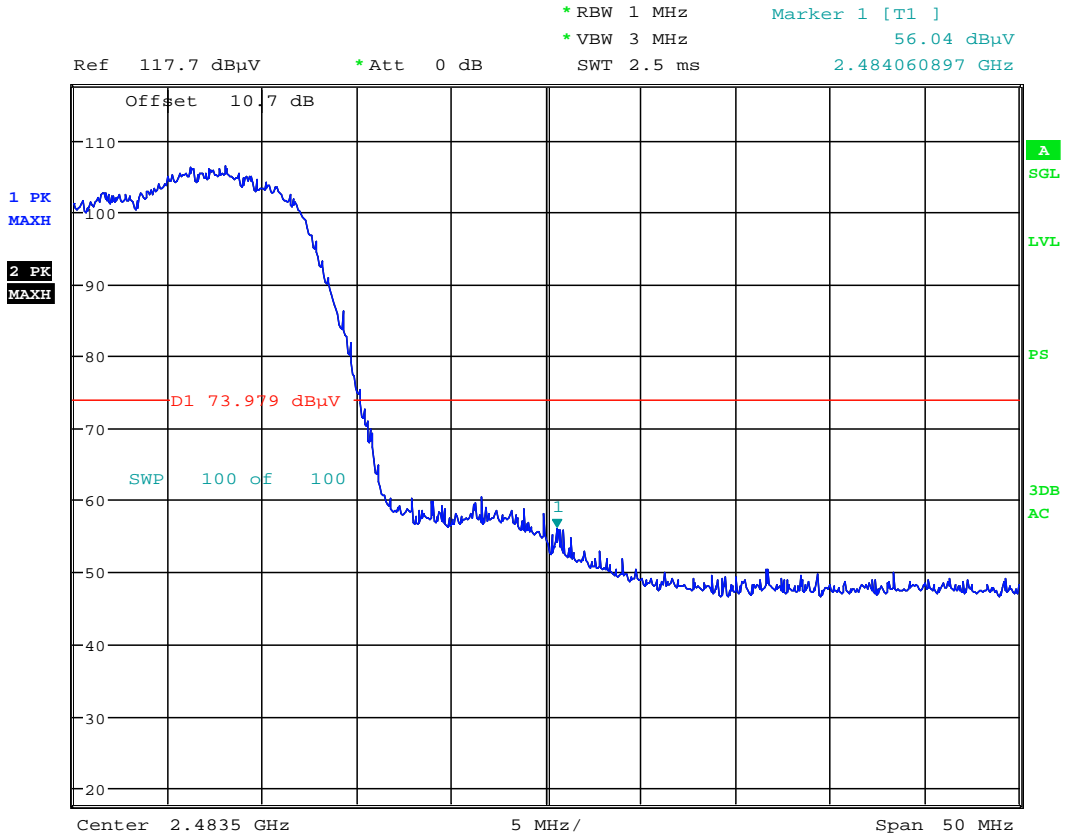


Date: 7.MAY.2014 21:51:48

**Plot 6-136. Radiated Restricted Upper Band Edge Measurement (Peak)**

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 117 of 122	

## 6.11 Line-Conducted Test Data

### §15.207

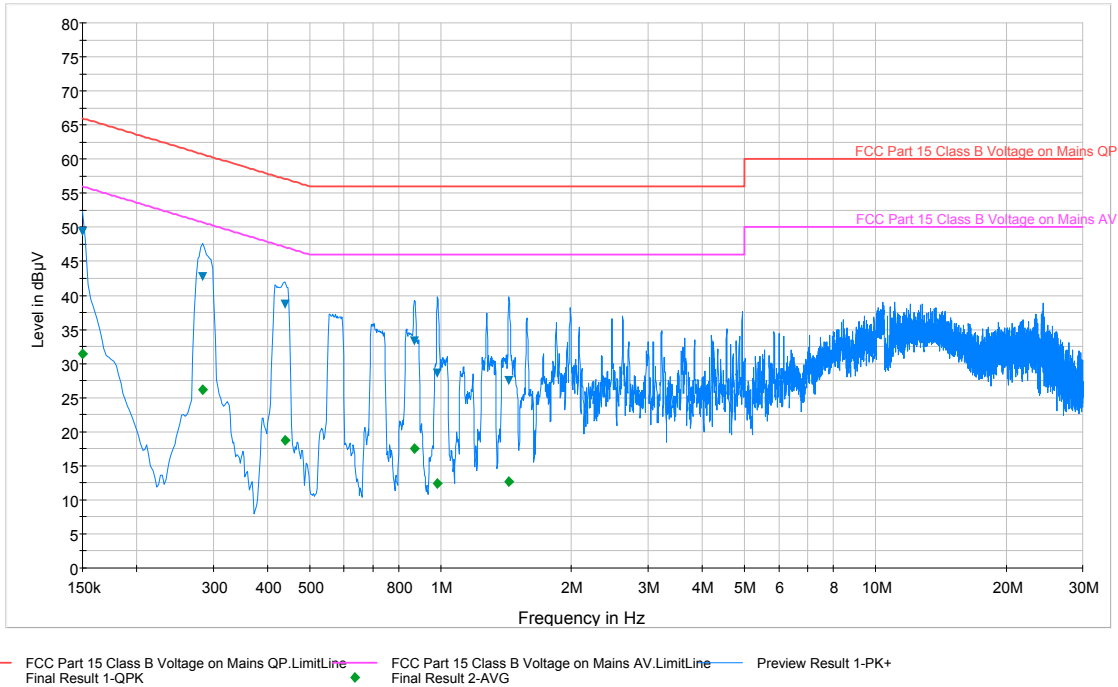

**Plot 6-137. Line Conducted Plot with 802.11b (L1)**

Frequency	Line	Corr.	QuasiPeak	Limit	Margin	Average	Limit	Margin
MHz		dB	dBµV	dBµV	dB	dBµV	dBµV	dB
0.150	L1	0.2	49.30	66.00	16.70	31.50	56.00	24.50
0.283	L1	0.1	42.80	60.70	17.90	26.10	50.70	24.60
0.438	L1	0.1	38.80	57.10	18.30	18.70	47.10	28.40
0.870	L1	0.1	33.30	56.00	22.70	17.60	46.00	28.40
0.985	L1	0.1	28.60	56.00	27.40	12.40	46.00	33.60
1.435	L1	0.1	27.50	56.00	28.50	12.70	46.00	33.30

**Table 6-50. Line Conducted Data with 802.11b (L1)**


**Notes:**

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11b mode using 1Mbps on Channel 6. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Factor (dB)
- Margin (dB) = QP/AV Limit (dBµV) – QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 118 of 122

# Line-Conducted Test Data

## §15.207

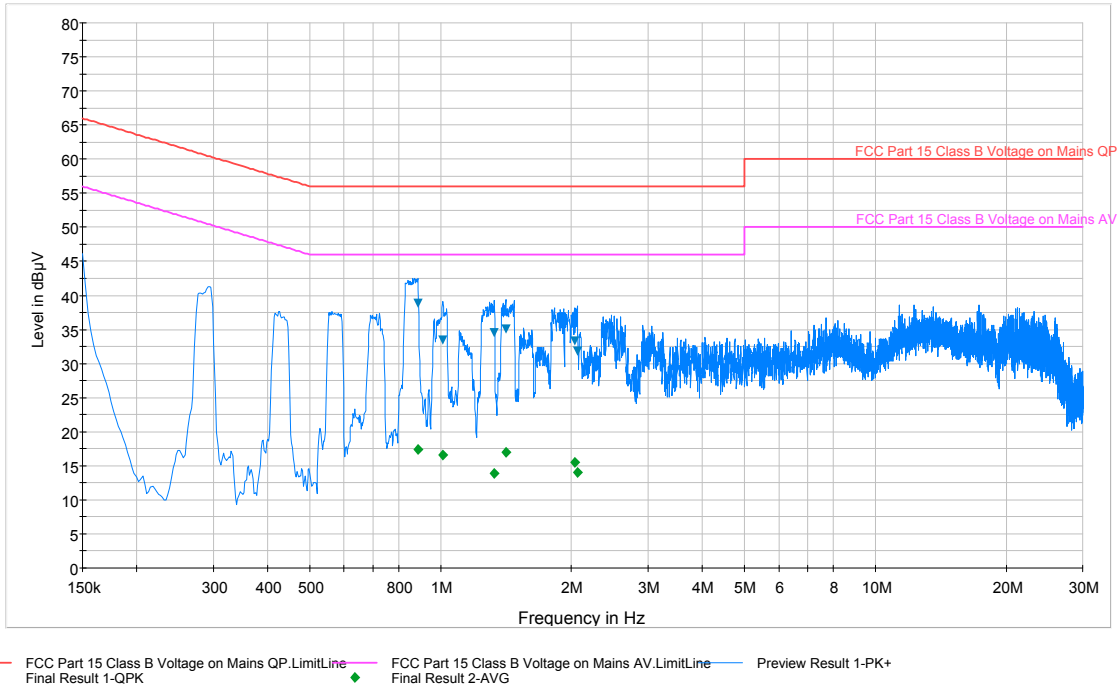

**Plot 6-138. Line Conducted Plot with 802.11b (N)**

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.886	N	0.1	38.80	56.00	17.20	17.40	46.00	28.60
1.010	N	0.1	33.40	56.00	22.60	16.60	46.00	29.40
1.327	N	0.1	34.60	56.00	21.40	13.90	46.00	32.10
1.412	N	0.1	35.00	56.00	21.00	17.00	46.00	29.00
2.031	N	0.2	33.30	56.00	22.70	15.50	46.00	30.50
2.063	N	0.2	31.90	56.00	24.10	14.10	46.00	31.90

**Table 6-51. Line Conducted Data with 802.11b (N)**


**Notes:**

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11b mode using 1Mbps on Channel 6. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Factor (dB)
- Margin (dB) = QP/AV Limit (dBµV) – QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet	Page 119 of 122	

# Line-Conducted Test Data

## §15.207

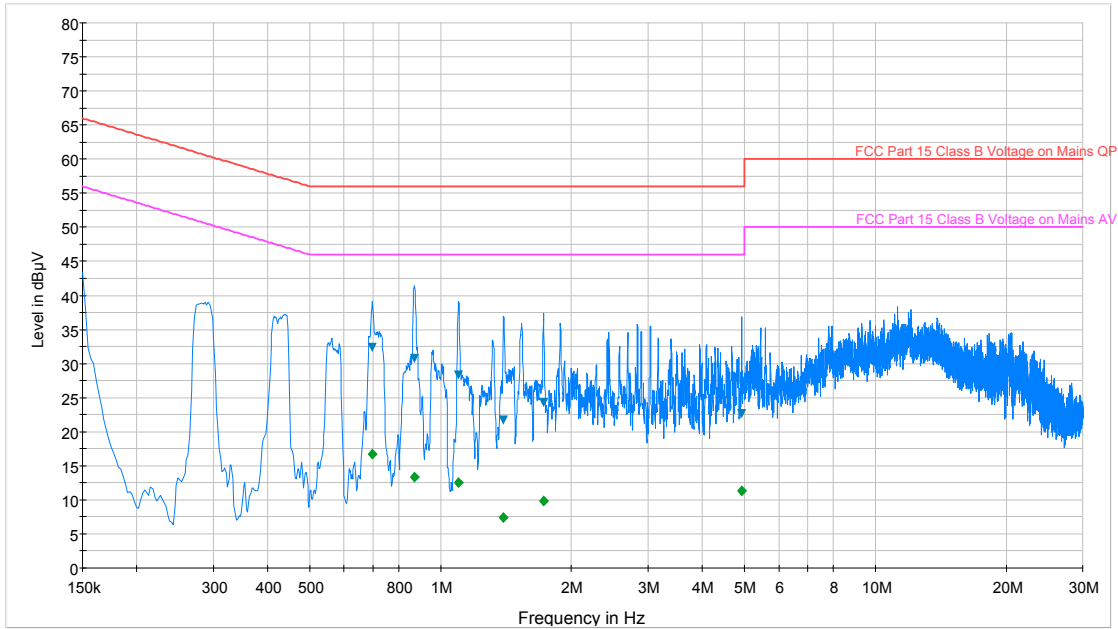

— FCC Part 15 Class B Voltage on Mains QP.LimitLine   
 — FCC Part 15 Class B Voltage on Mains AV.LimitLine   
 — Preview Result 1-PK+  
▼ Final Result 1-QPK   
 ◆ Final Result 2-AVG

**Plot 6-139. Line Conducted Plot with 802.11a (L1)**

Frequency	Line	Corr.	QuasiPeak	Limit	Margin	Average	Limit	Margin
MHz		dB	dBµV	dBµV	dB	dBµV	dBµV	dB
0.697	L1	0.1	32.40	56.00	23.60	16.70	46.00	29.30
0.870	L1	0.1	30.80	56.00	25.20	13.30	46.00	32.70
1.100	L1	0.1	28.40	56.00	27.60	12.60	46.00	33.40
1.397	L1	0.1	21.70	56.00	34.30	7.40	46.00	38.60
1.725	L1	0.1	24.20	56.00	31.80	9.80	46.00	36.20
4.927	L1	0.2	22.60	56.00	33.40	11.30	46.00	34.70

**Table 6-52. Line Conducted Data with 802.11a (L1)**


**Notes:**

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 157. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Factor (dB)
- Margin (dB) = QP/AV Limit (dBµV) – QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 120 of 122

# Line-Conducted Test Data

## §15.207

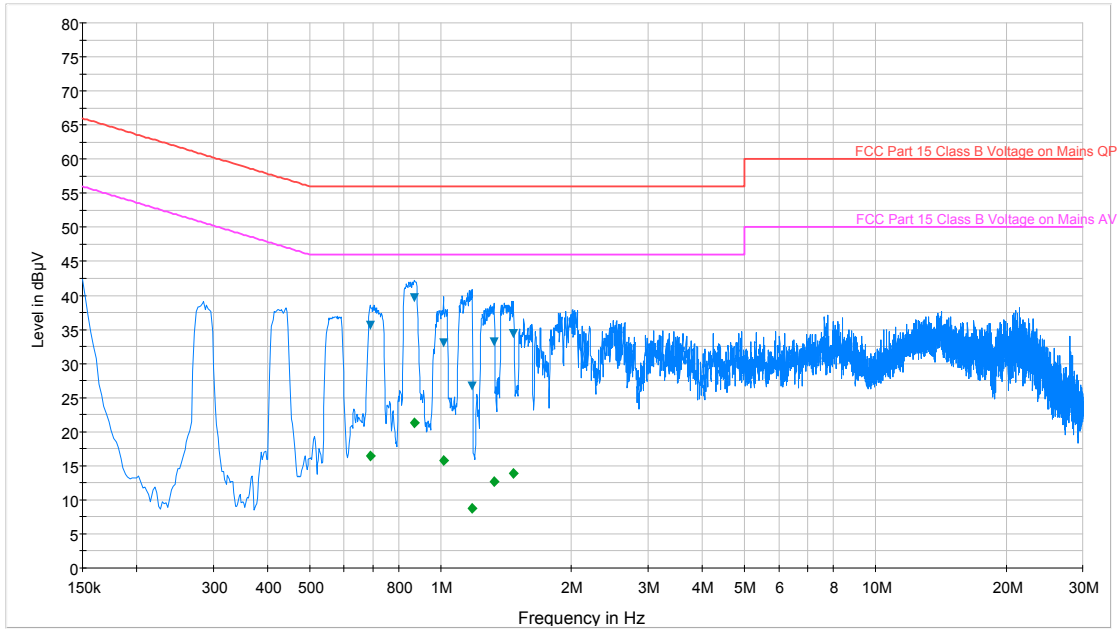

— FCC Part 15 Class B Voltage on Mains QP.LimitLine   
 — FCC Part 15 Class B Voltage on Mains AV.LimitLine   
 — Preview Result 1-PK+  
▼ Final Result 1-QPK   
 ◆ Final Result 2-AVG

**Plot 6-140. Line Conducted Plot with 802.11a (N)**

Frequency	Line	Corr.	QuasiPeak	Limit	Margin	Average	Limit	Margin
MHz		dB	dBµV	dBµV	dB	dBµV	dBµV	dB
0.688	N	0.1	35.60	56.00	20.40	16.50	46.00	29.50
0.870	N	0.1	39.70	56.00	16.30	21.30	46.00	24.70
1.016	N	0.1	33.00	56.00	23.00	15.80	46.00	30.20
1.183	N	0.1	26.80	56.00	29.20	8.80	46.00	37.20
1.325	N	0.1	33.20	56.00	22.80	12.70	46.00	33.30
1.471	N	0.1	34.50	56.00	21.50	13.80	46.00	32.20

**Table 6-53. Line Conducted Data with 802.11a (N)**


**Notes:**

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 157. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Factor (dB)
- Margin (dB) = QP/AV Limit (dBµV) – QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSMT705M		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1404300884.A3L	Test Dates: 4/11 - 5/8/2014	EUT Type: Portable Tablet		Page 121 of 122

## 7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Tablet FCC ID: A3LSMT705M** is in compliance with Part 15C of the FCC Rules.

<b>FCC ID:</b> A3LSMT705M		<b>FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1404300884.A3L	<b>Test Dates:</b> 4/11 - 5/8/2014	<b>EUT Type:</b> Portable Tablet	Page 122 of 122	