

7.5 Maximum Power Spectral Density – 802.11a/n/ac

§15.407(a.1)(2.5)

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r02, and at the appropriate frequencies. Method SA-1, as defined in KDB 789033 D02 v01r02, was used to measure the power spectral density.

In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

KDB 789033 D02 v01r02 – Section F

KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-4. Test Instrument & Measurement Setup

Test Notes

None


FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 66 of 197

Antenna-1 Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]	Pass / Fail
Band 1	5180	36	a	6	2.63	11.0	-8.37	Pass
	5200	40	a	6	2.60	11.0	-8.40	Pass
	5240	48	a	6	2.34	11.0	-8.66	Pass
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	2.37	11.0	-8.63	Pass
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	2.74	11.0	-8.26	Pass
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	2.92	11.0	-8.08	Pass
	5190	38	n (40MHz)	13.5/15 (MCS0)	0.25	11.0	-10.75	Pass
	5230	46	n (40MHz)	13.5/15 (MCS0)	0.32	11.0	-10.68	Pass
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-3.66	11.0	-14.66	Pass
Band 2A	5260	52	a	6	2.43	11.0	-8.57	Pass
	5280	56	a	6	2.16	11.0	-8.84	Pass
	5320	64	a	6	2.23	11.0	-8.77	Pass
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	2.99	11.0	-8.01	Pass
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	2.68	11.0	-8.32	Pass
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	2.52	11.0	-8.48	Pass
	5270	54	n (40MHz)	13.5/15 (MCS0)	0.22	11.0	-10.78	Pass
	5310	62	n (40MHz)	13.5/15 (MCS0)	-0.44	11.0	-11.44	Pass
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-3.69	11.0	-14.69	Pass
Band 2C	5500	100	a	6	2.01	11.0	-8.99	Pass
	5600	120	a	6	1.72	11.0	-9.28	Pass
	5720	144	a	6	2.40	11.0	-8.60	Pass
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	2.67	11.0	-8.33	Pass
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	2.71	11.0	-8.29	Pass
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	2.68	11.0	-8.32	Pass
	5510	102	n (40MHz)	13.5/15 (MCS0)	0.42	11.0	-10.58	Pass
	5590	118	n (40MHz)	13.5/15 (MCS0)	0.39	11.0	-10.61	Pass
	5710	142	n (40MHz)	13.5/15 (MCS0)	0.00	11.0	-11.00	Pass
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-3.99	11.0	-14.99	Pass
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	-3.87	11.0	-14.87	Pass
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-6.97	11.0	-17.97	Pass

Table 7-17. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 67 of 197

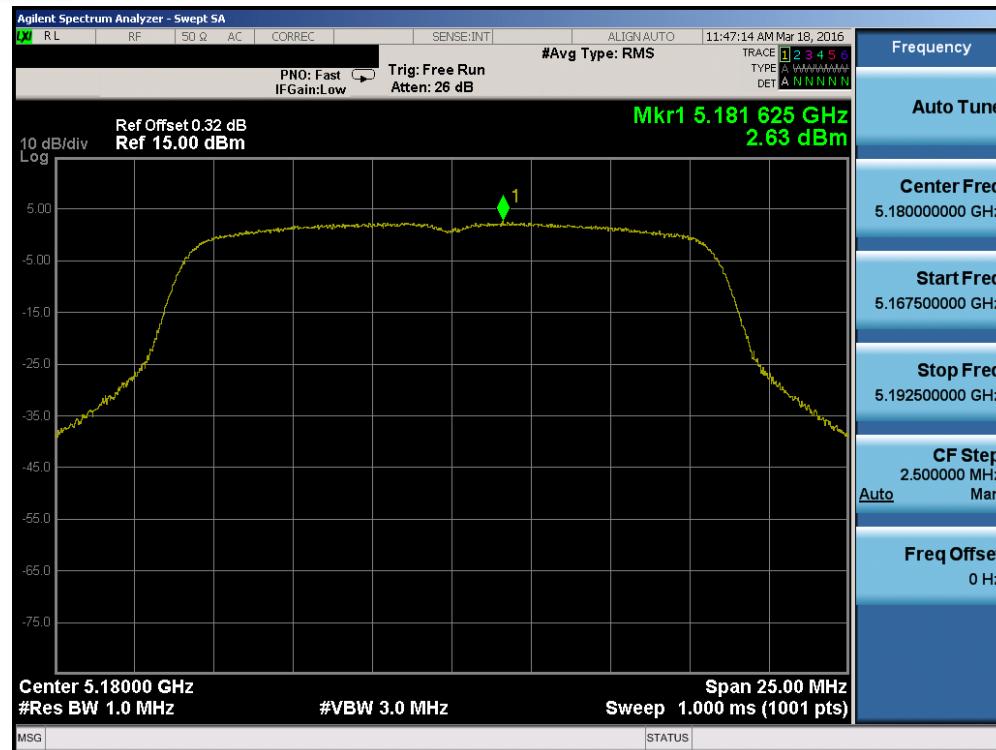

Plot 7-79. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)



Plot 7-80. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 68 of 197



Plot 7-81. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)




Plot 7-82. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 69 of 197




Plot 7-83. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

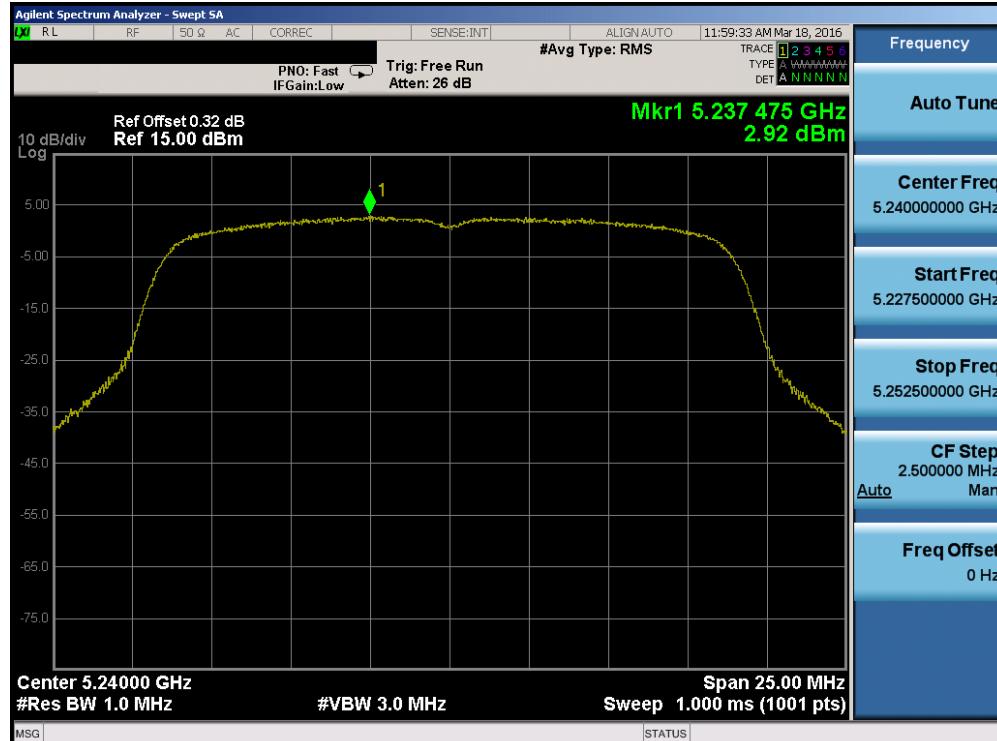

Plot 7-84. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSMT713	 PCTEST Engineering Laboratory, Inc.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 70 of 197

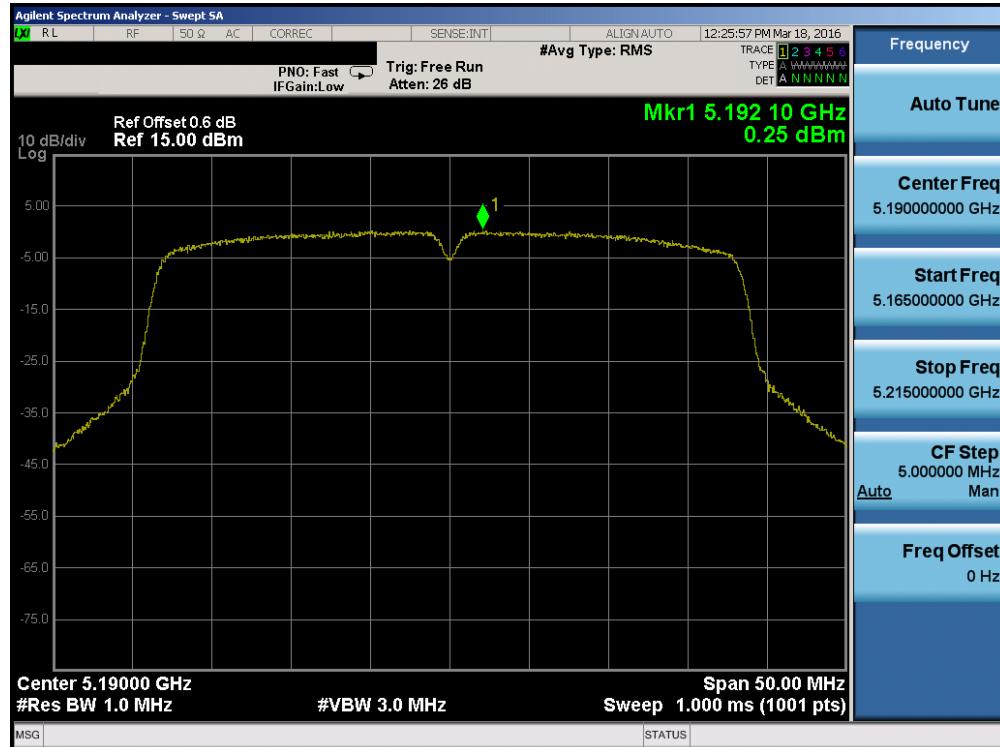


Plot 7-85. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)



Plot 7-86. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 71 of 197

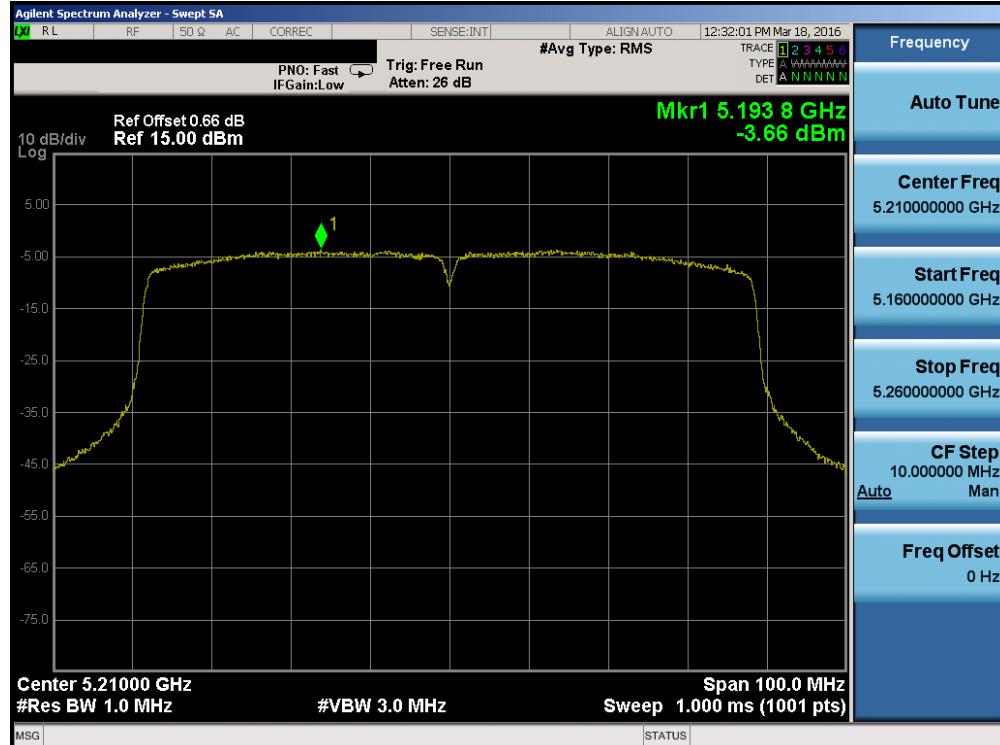

Plot 7-87. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)




Plot 7-88. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 72 of 197




Plot 7-89. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 56)

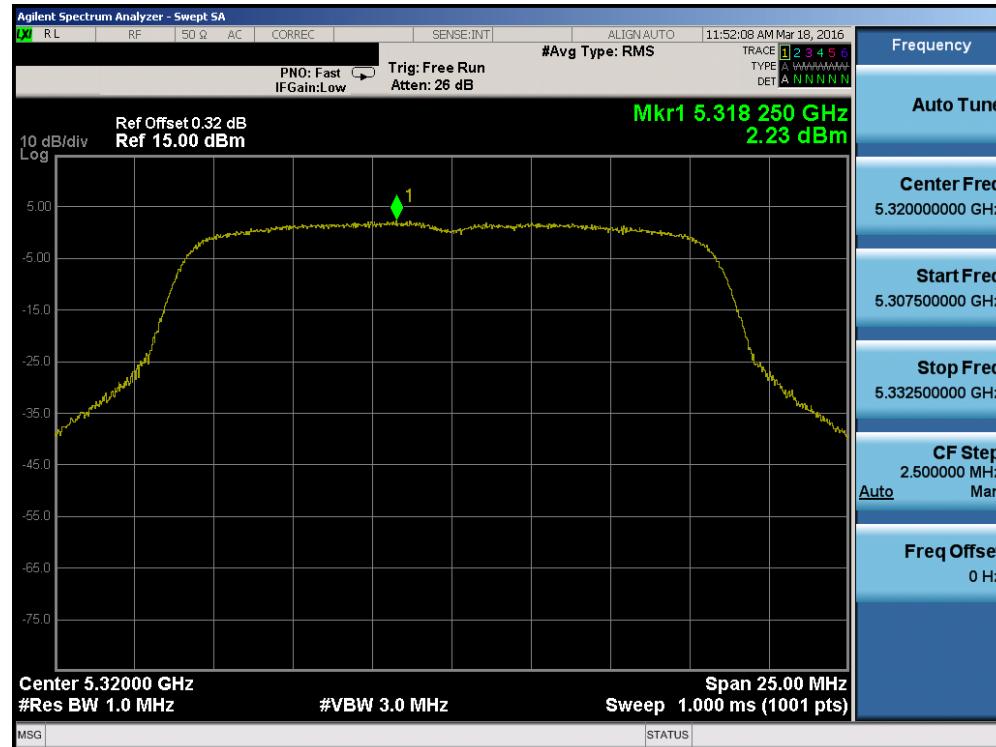


Plot 7-90. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 73 of 197

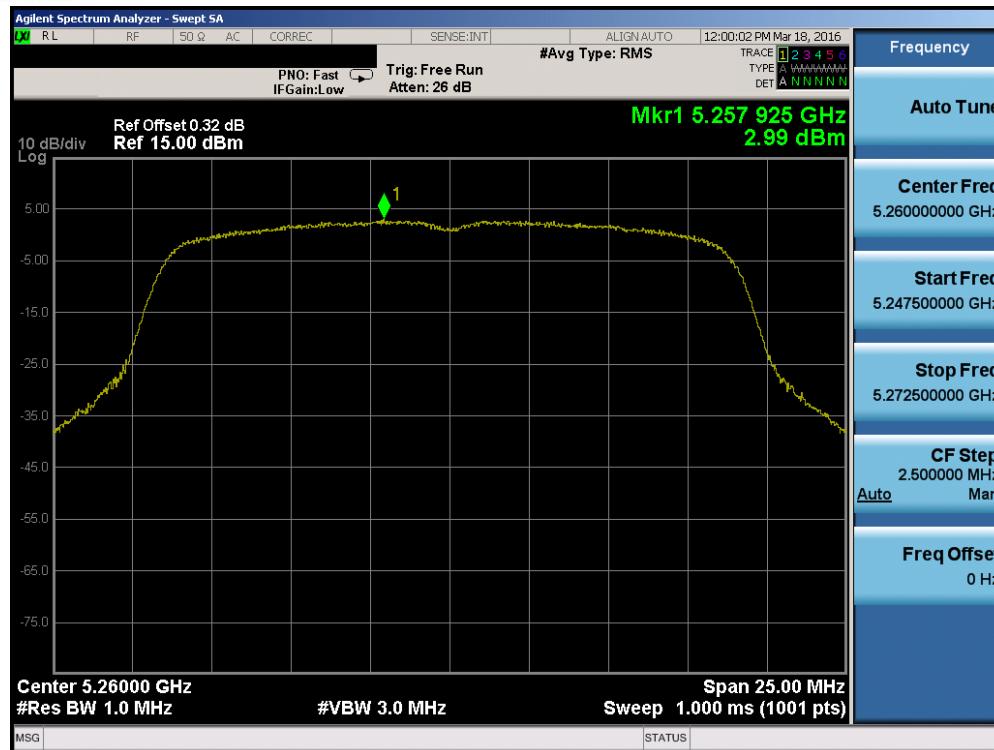

Plot 7-91. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

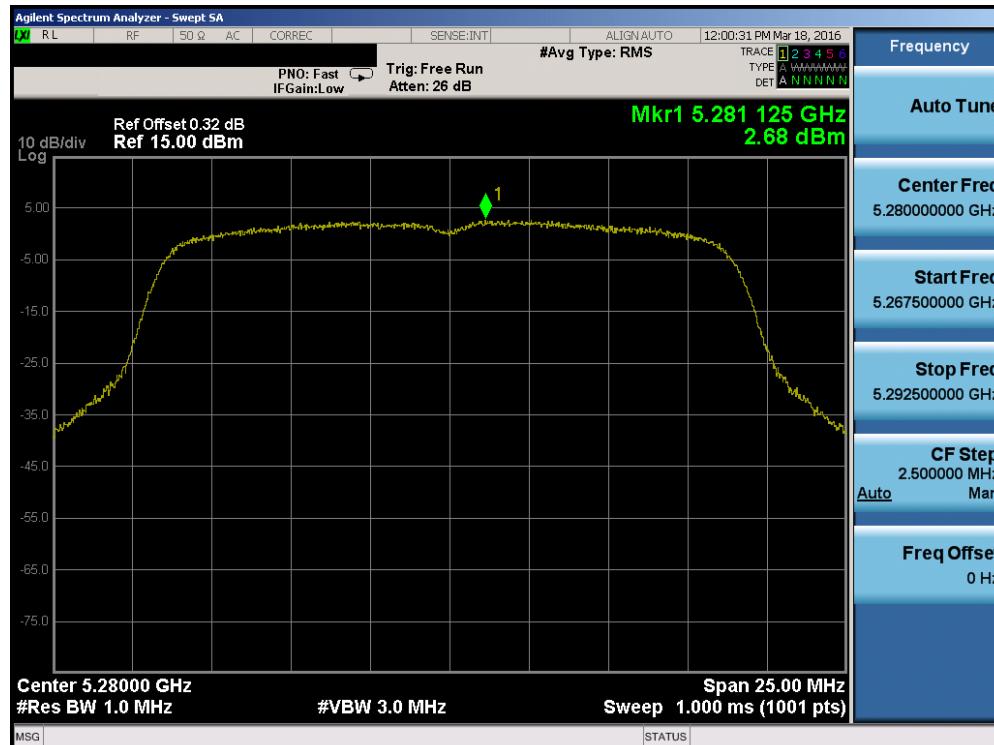


Plot 7-92. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 74 of 197




Plot 7-93. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

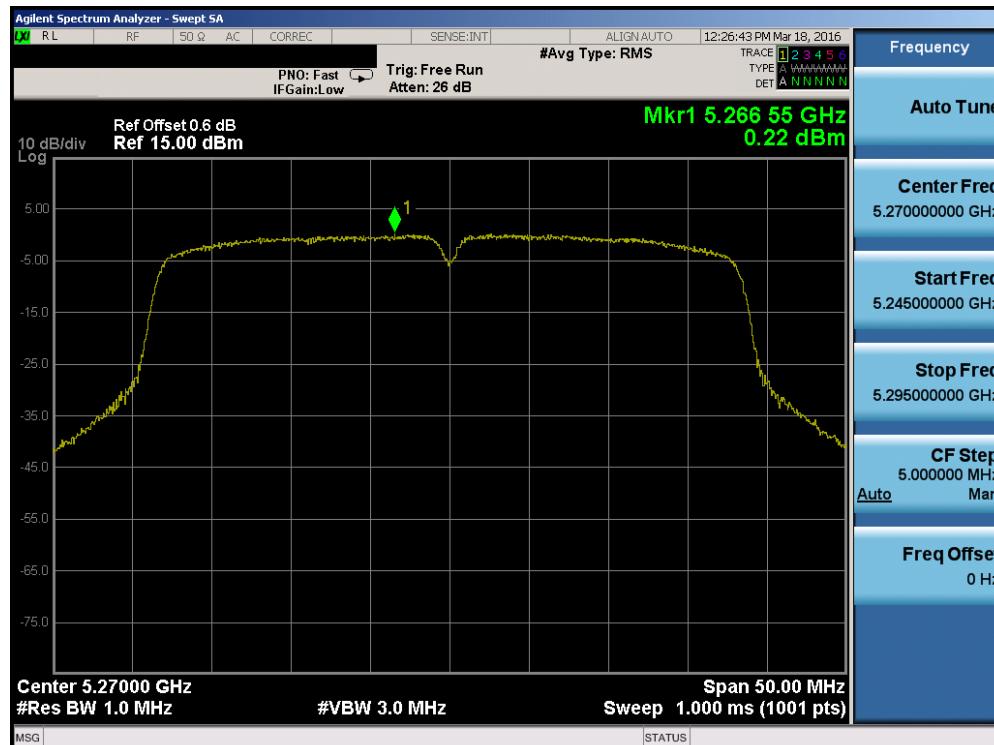


Plot 7-94. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 75 of 197

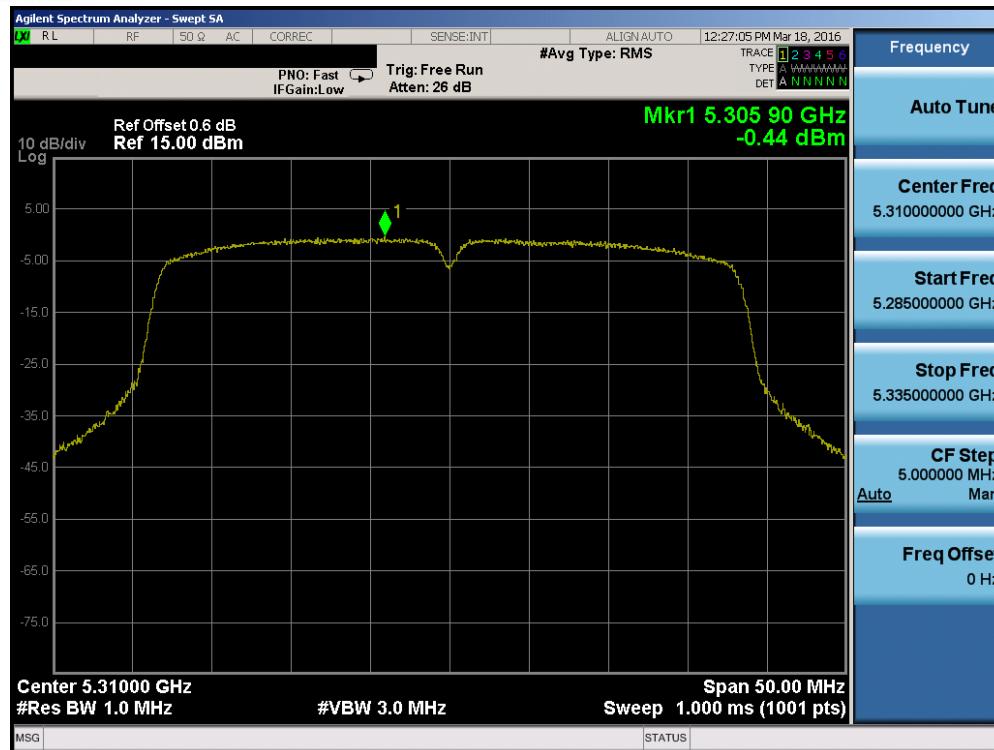

Plot 7-95. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

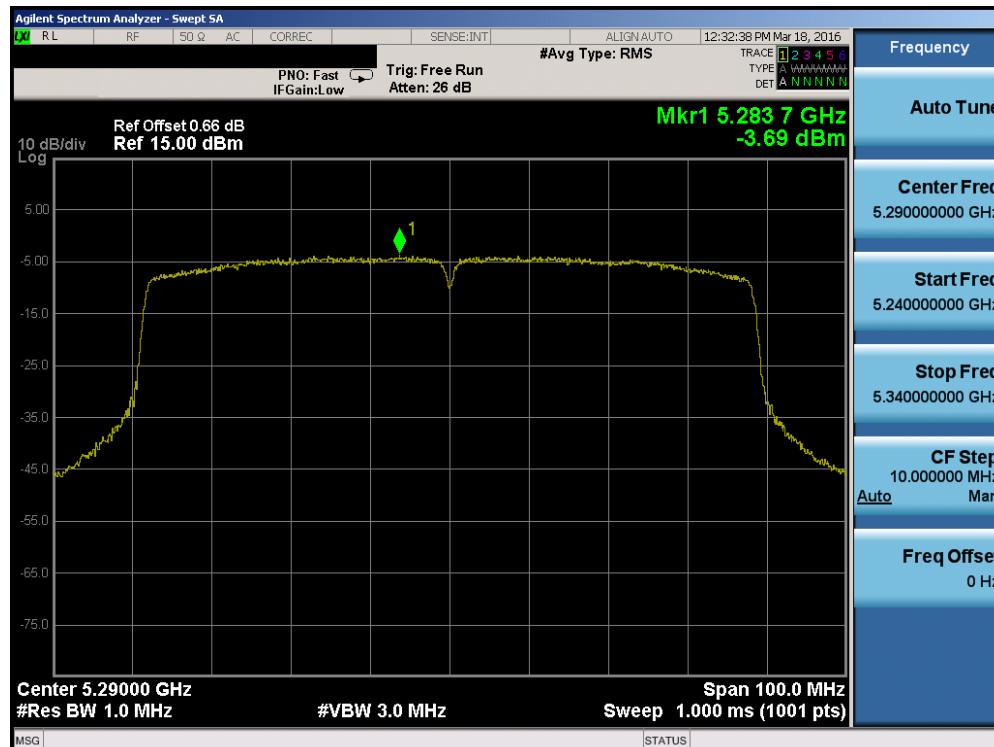


Plot 7-96. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 76 of 197



Plot 7-97. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 100)

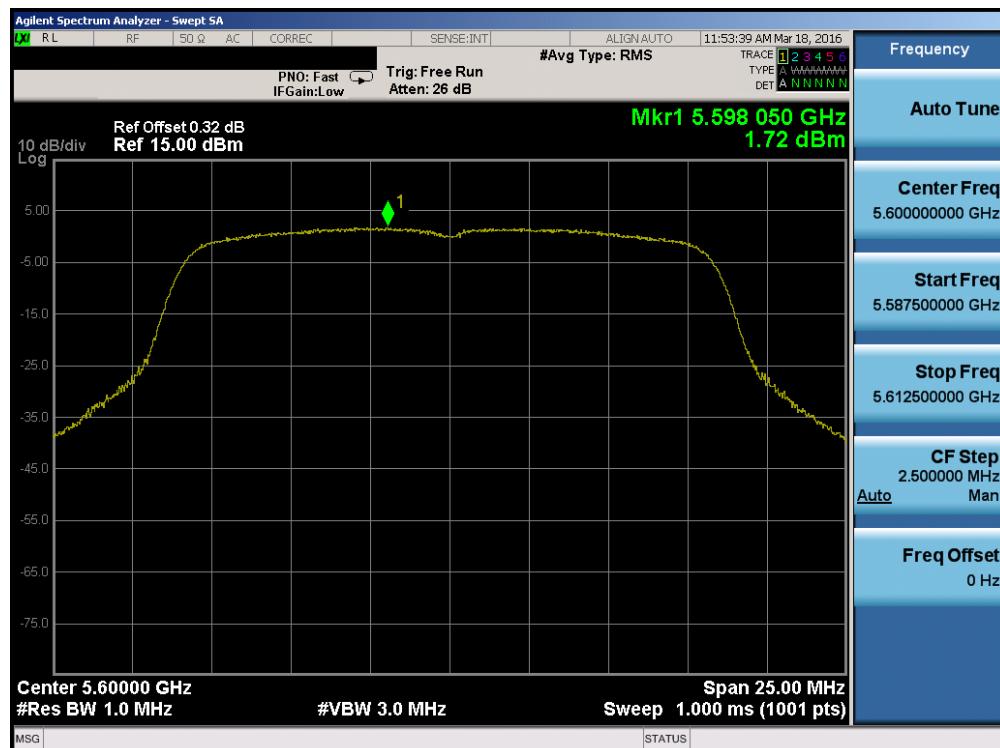

Plot 7-98. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 77 of 197




Plot 7-99. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 144)



Plot 7-100. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 78 of 197

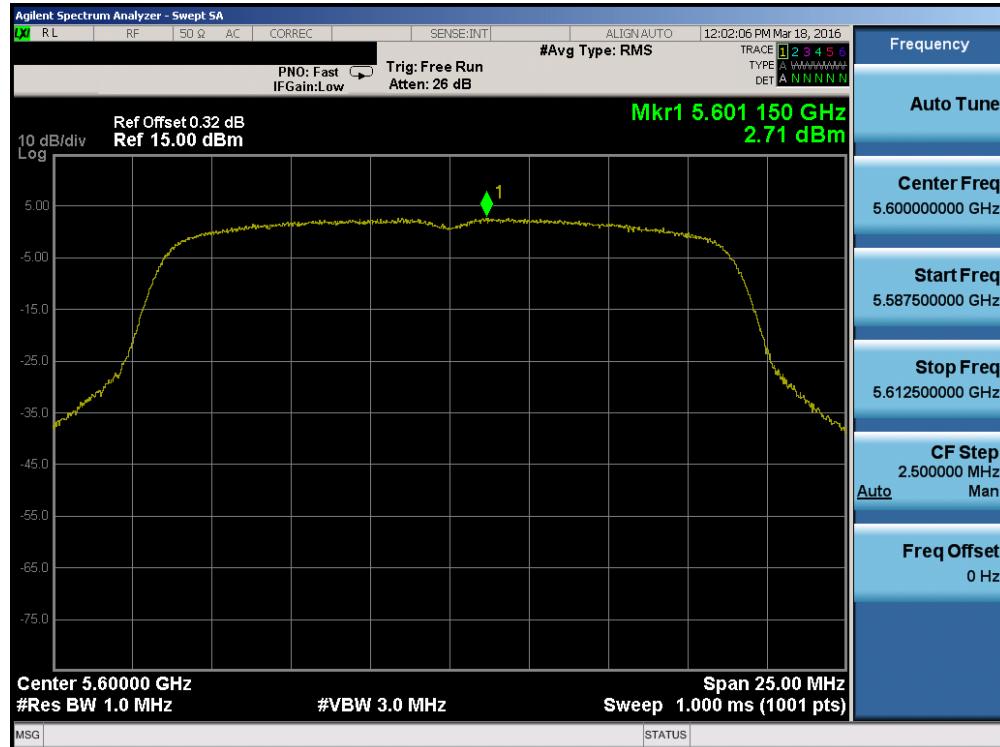

Plot 7-101. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)



Plot 7-102. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 79 of 197




Plot 7-103. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)




Plot 7-104. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 80 of 197

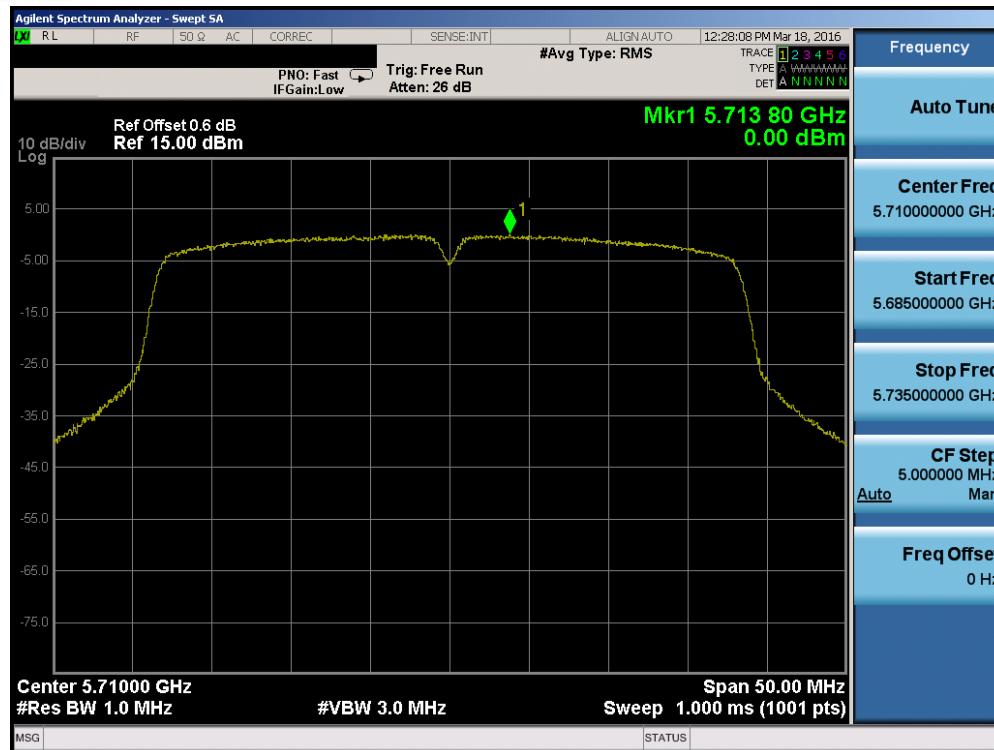


Plot 7-105. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

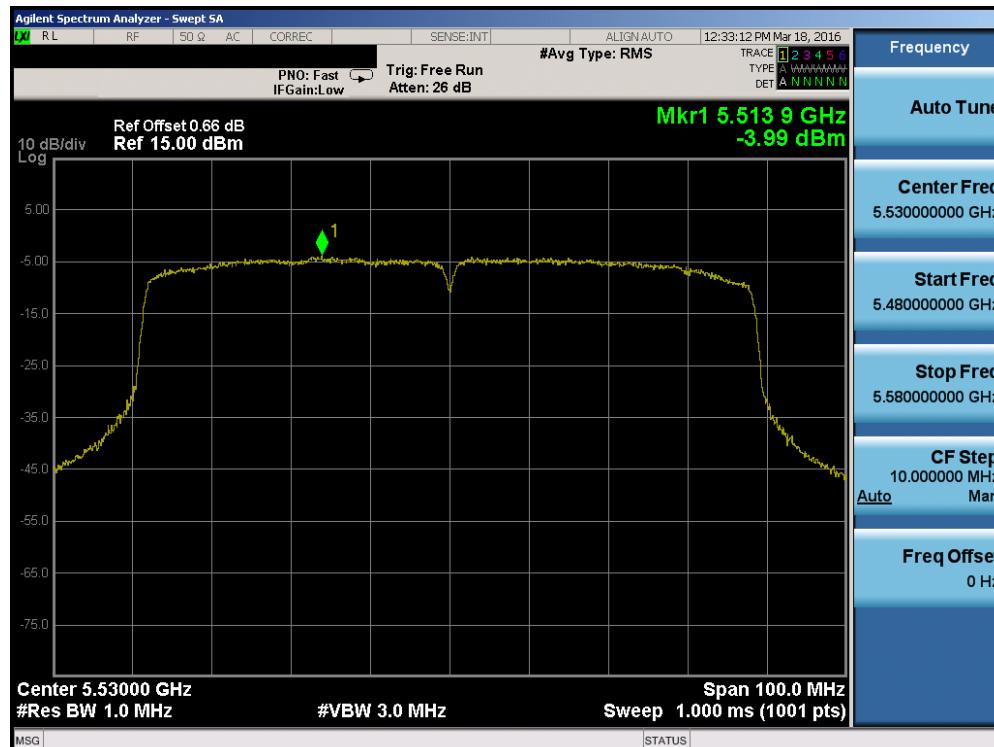


Plot 7-106. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 81 of 197

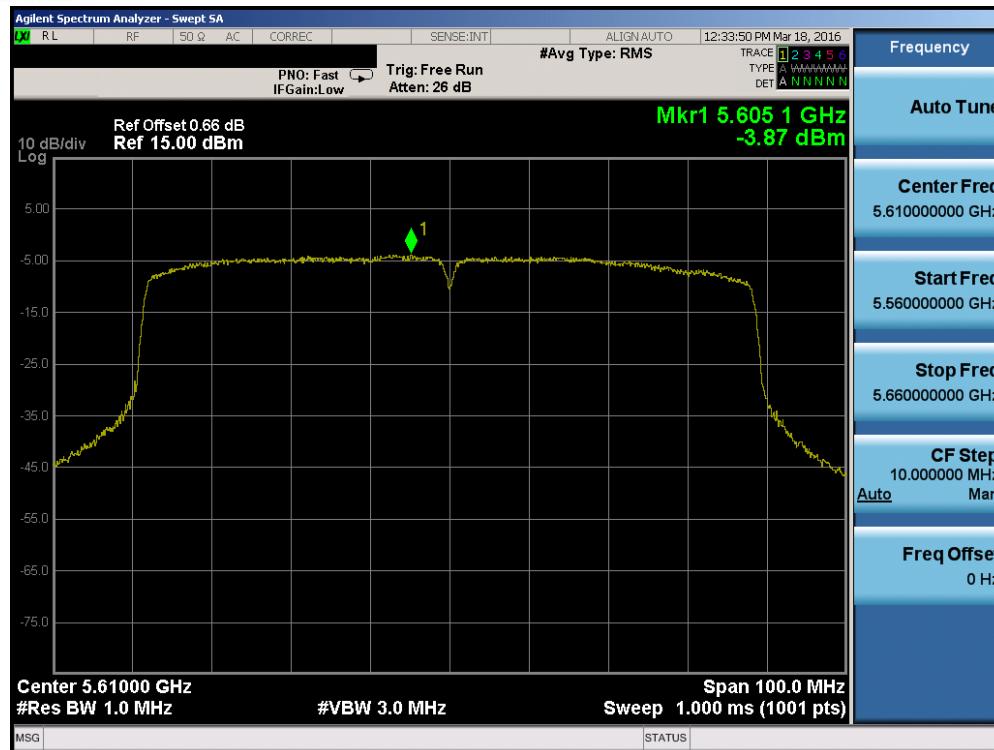

Plot 7-107. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

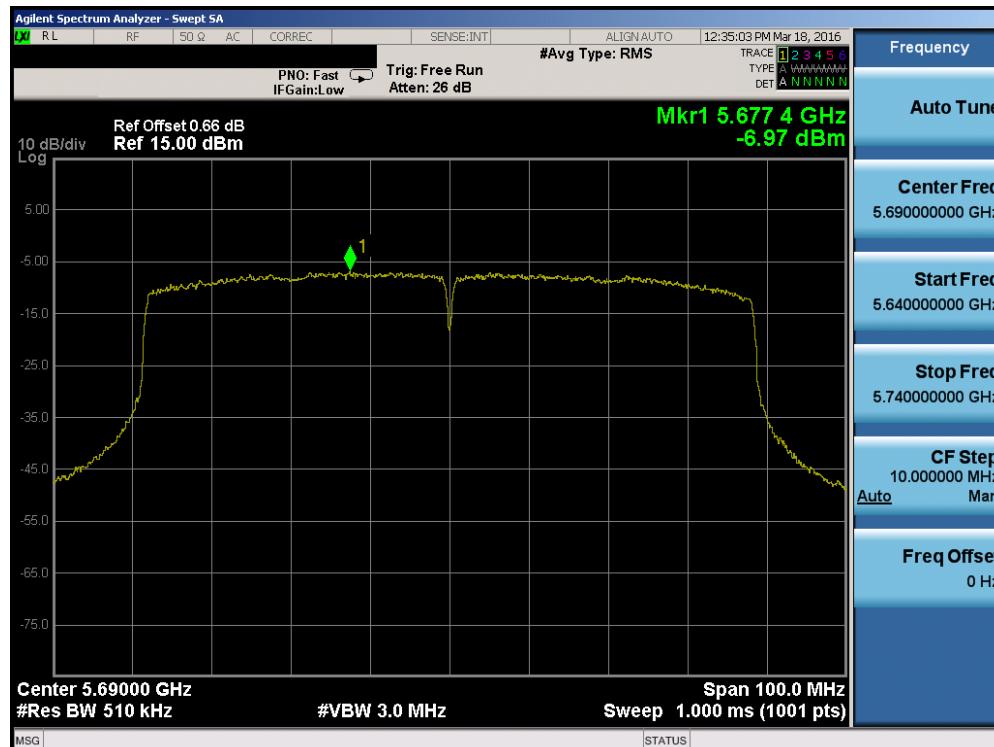


Plot 7-108. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 82 of 197

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]	Pass / Fail
Band 3	5745	149	a	6	-1.24	30.0	-31.24	Pass
	5785	157	a	6	-0.57	30.0	-30.57	Pass
	5825	165	a	6	0.01	30.0	-29.99	Pass
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	0.03	30.0	-29.97	Pass
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	-0.12	30.0	-30.12	Pass
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	0.14	30.0	-29.86	Pass
	5755	151	n (40MHz)	13.5/15 (MCS0)	-2.66	30.0	-32.66	Pass
	5795	159	n (40MHz)	13.5/15 (MCS0)	-2.61	30.0	-32.61	Pass
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-3.47	30.0	-33.47	Pass

Table 7-18. Band 3 Conducted Power Spectral Density Measurements

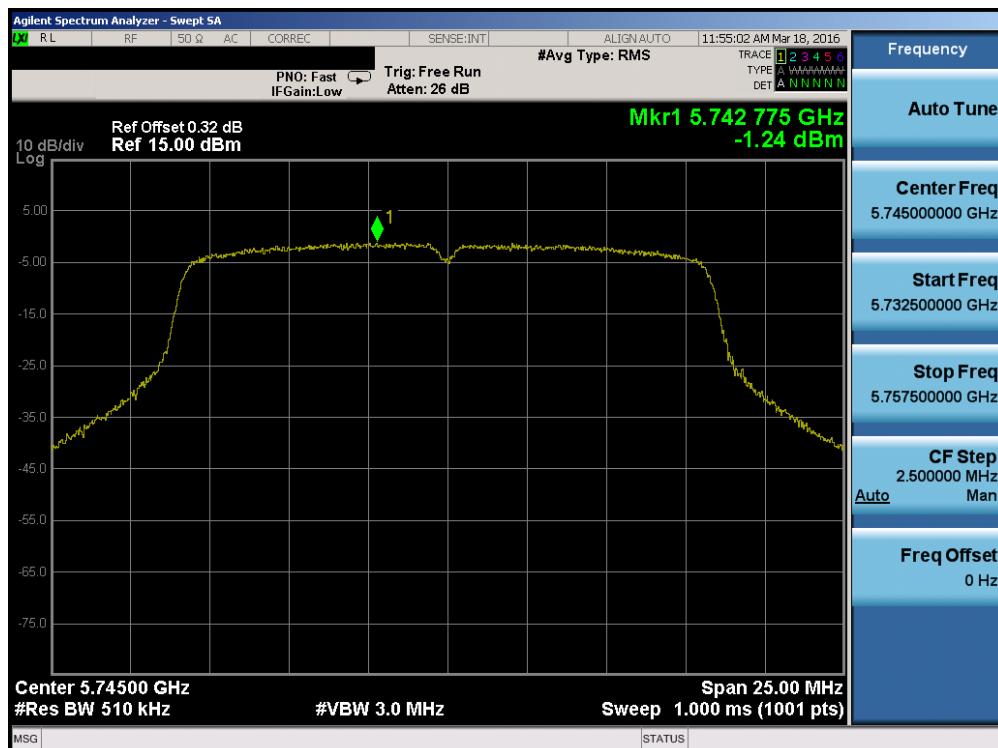

Plot 7-109. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 149)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 83 of 197



Plot 7-110. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 157)




Plot 7-111. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 84 of 197



Plot 7-112. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

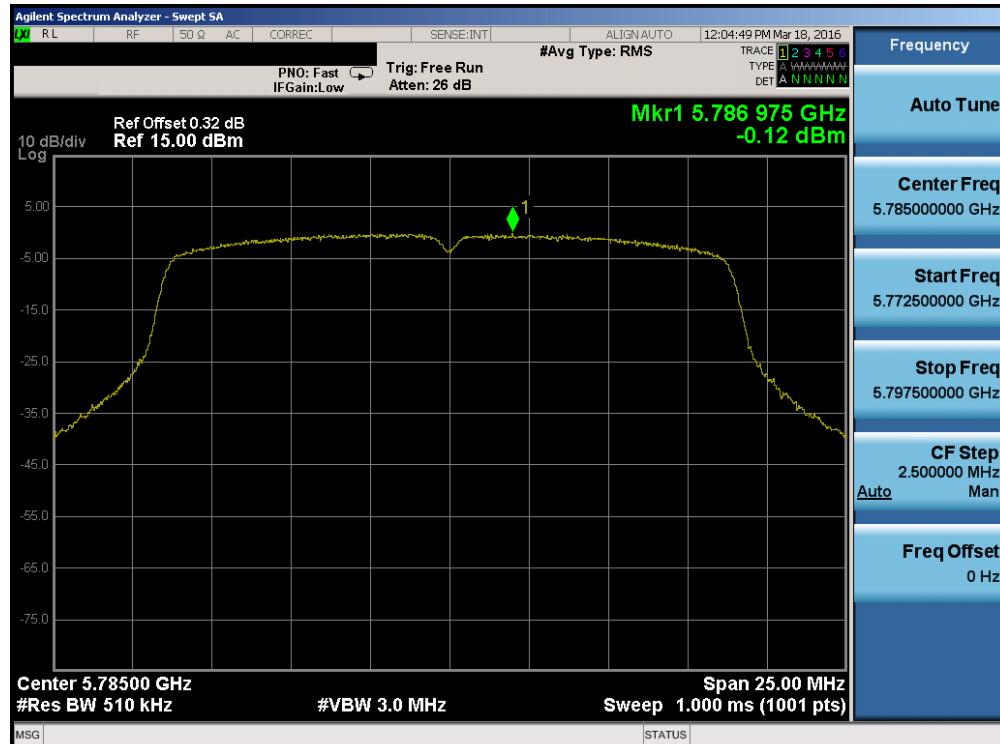

Plot 7-113. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 85 of 197




Plot 7-114. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)




Plot 7-115. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 86 of 197

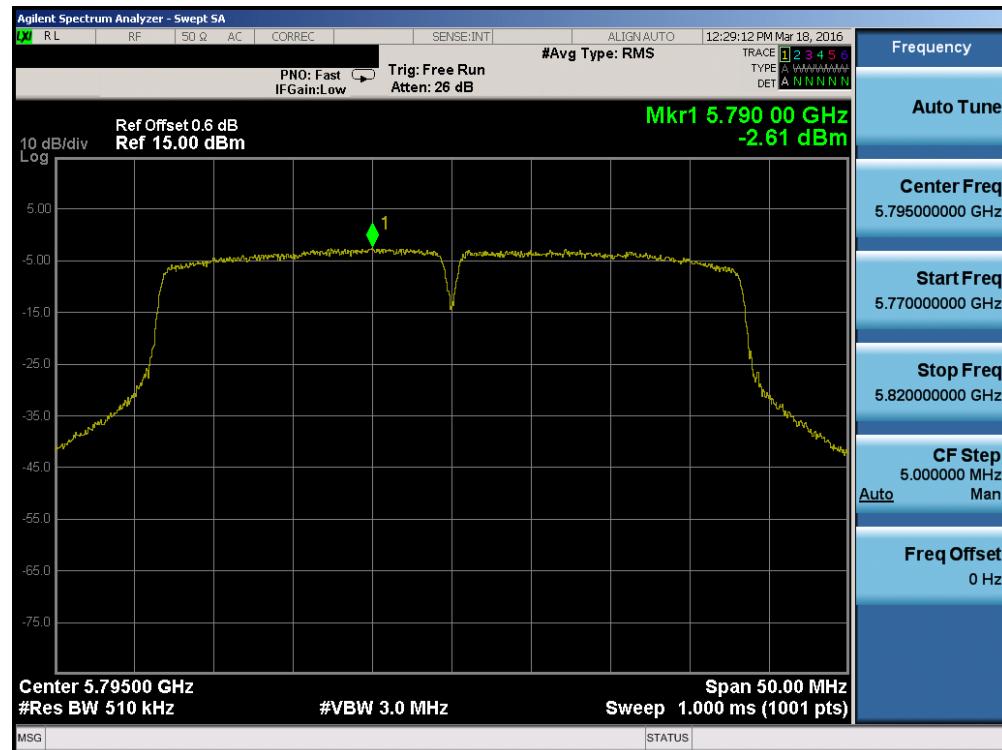

Plot 7-116. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

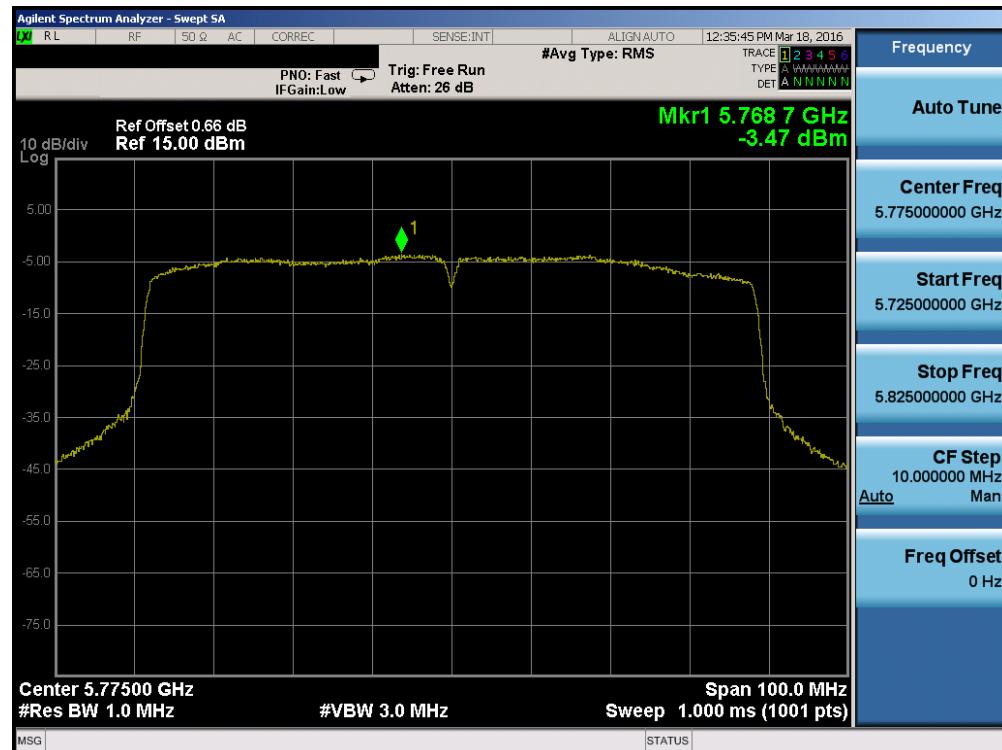

Plot 7-117. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 87 of 197

Antenna-2 Power Spectral Density Measurements


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]	Pass / Fail
Band 1	5180	36	a	6	2.46	11.0	-8.54	Pass
	5200	40	a	6	2.72	11.0	-8.28	Pass
	5240	48	a	6	2.44	11.0	-8.57	Pass
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	2.22	11.0	-8.78	Pass
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	2.35	11.0	-8.65	Pass
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	2.04	11.0	-8.96	Pass
	5190	38	n (40MHz)	13.5/15 (MCS0)	-0.46	11.0	-11.46	Pass
	5230	46	n (40MHz)	13.5/15 (MCS0)	-0.45	11.0	-11.45	Pass
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-3.67	11.0	-14.67	Pass
Band 2A	5260	52	a	6	2.65	11.0	-8.35	Pass
	5280	56	a	6	2.50	11.0	-8.50	Pass
	5320	64	a	6	2.75	11.0	-8.25	Pass
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	2.10	11.0	-8.90	Pass
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	2.18	11.0	-8.82	Pass
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	2.40	11.0	-8.61	Pass
	5270	54	n (40MHz)	13.5/15 (MCS0)	-0.66	11.0	-11.66	Pass
	5310	62	n (40MHz)	13.5/15 (MCS0)	-0.61	11.0	-11.61	Pass
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-4.07	11.0	-15.07	Pass
Band 2C	5500	100	a	6	2.43	11.0	-8.57	Pass
	5600	120	a	6	2.56	11.0	-8.44	Pass
	5720	144	a	6	2.42	11.0	-8.58	Pass
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	1.94	11.0	-9.06	Pass
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	1.93	11.0	-9.07	Pass
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	2.07	11.0	-8.93	Pass
	5510	102	n (40MHz)	13.5/15 (MCS0)	-0.97	11.0	-11.97	Pass
	5590	118	n (40MHz)	13.5/15 (MCS0)	-0.82	11.0	-11.82	Pass
	5710	142	n (40MHz)	13.5/15 (MCS0)	-0.65	11.0	-11.65	Pass
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-4.43	11.0	-15.43	Pass
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	-4.56	11.0	-15.56	Pass
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-7.61	11.0	-18.61	Pass

Table 7-19. Conducted Power Spectral Density Measurements

FCC ID: A3LSMT713	 PCTEST Engineering Laboratory, Inc.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 88 of 197



Plot 7-118. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)

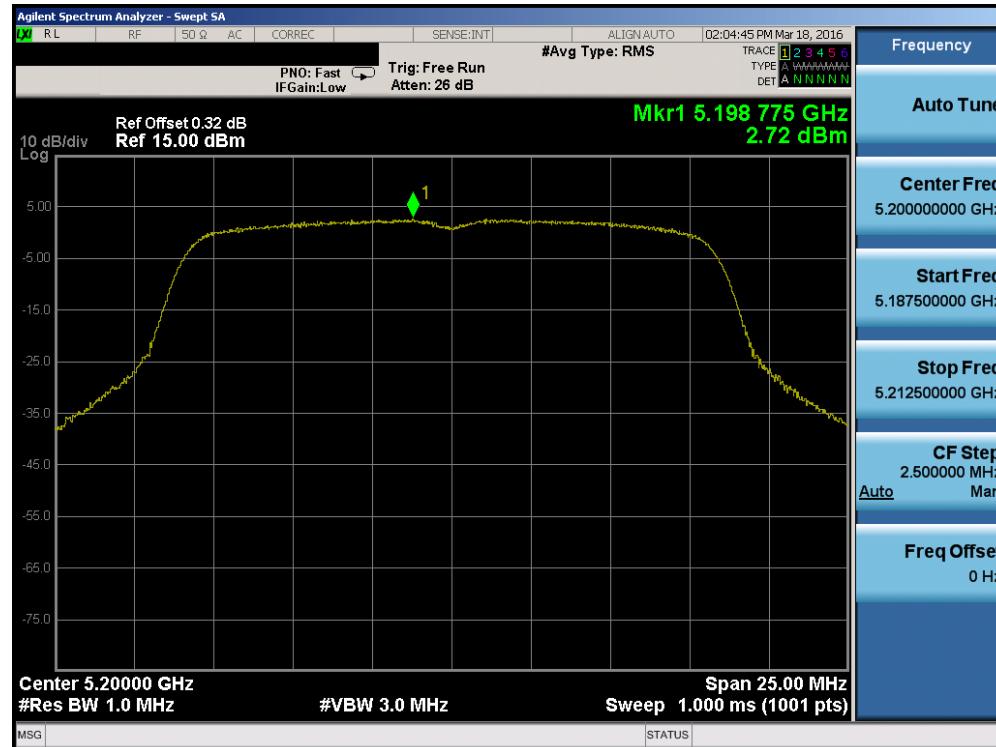

Plot 7-119. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 89 of 197




Plot 7-120. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)



Plot 7-121. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 90 of 197

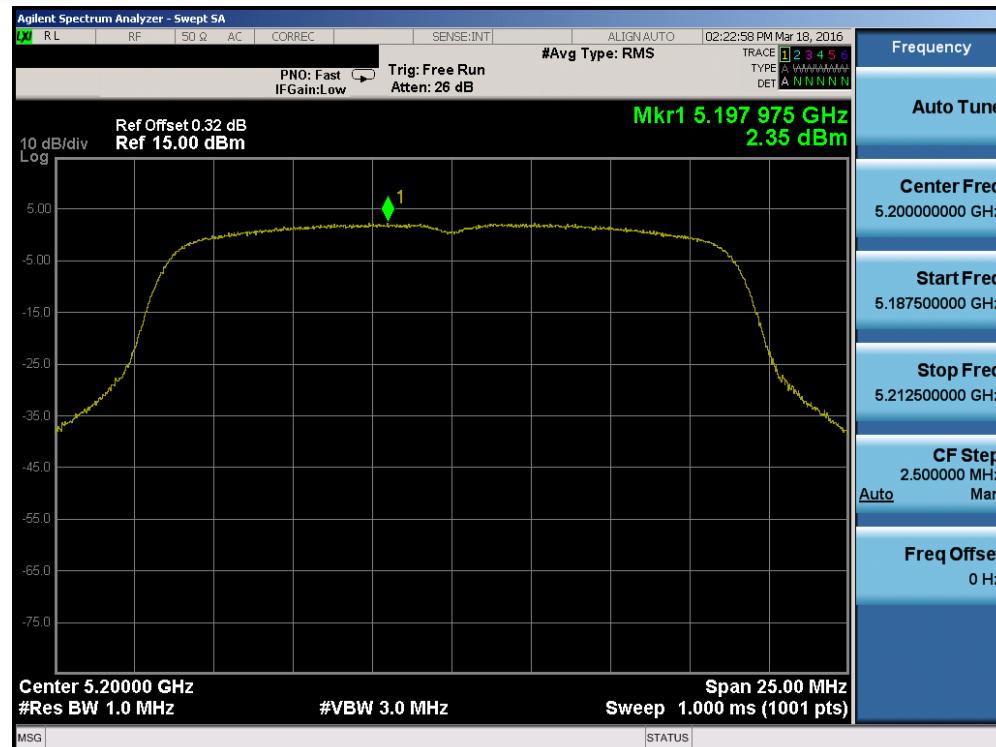


Plot 7-122. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)



Plot 7-123. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 91 of 197

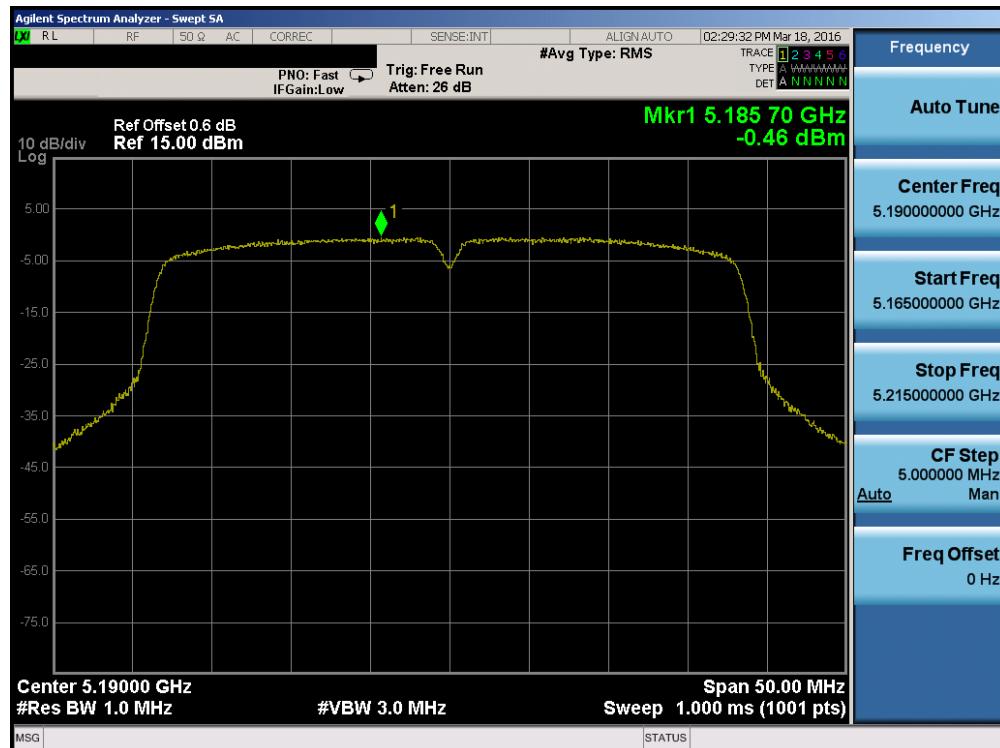


Plot 7-124. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)



Plot 7-125. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 92 of 197

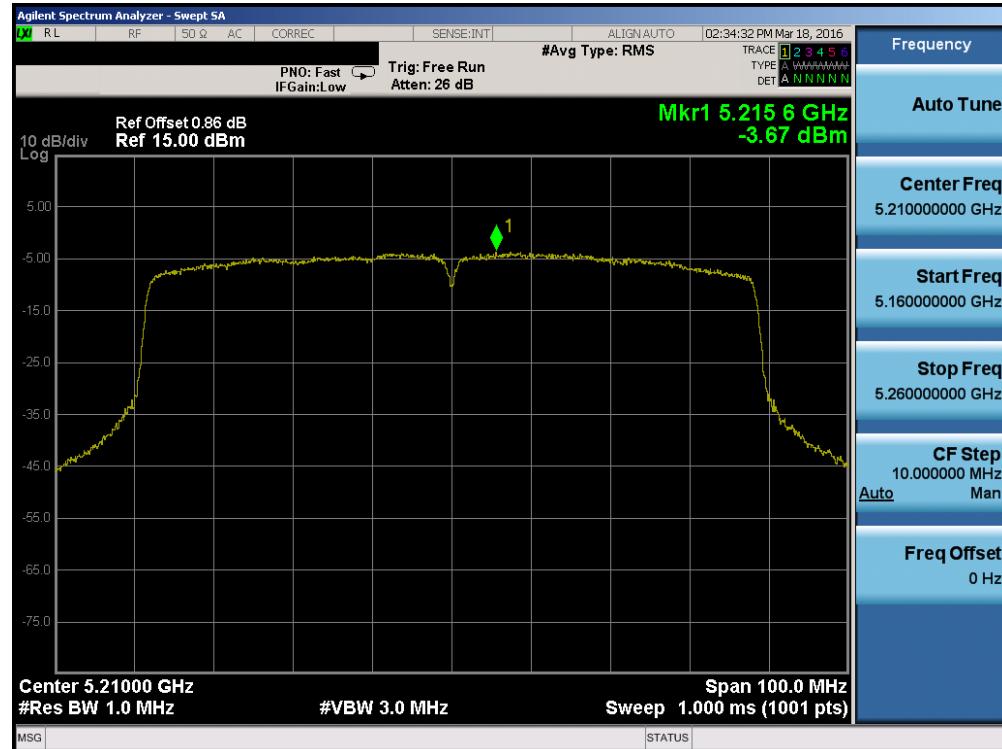


Plot 7-126. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)



Plot 7-127. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 52)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 93 of 197

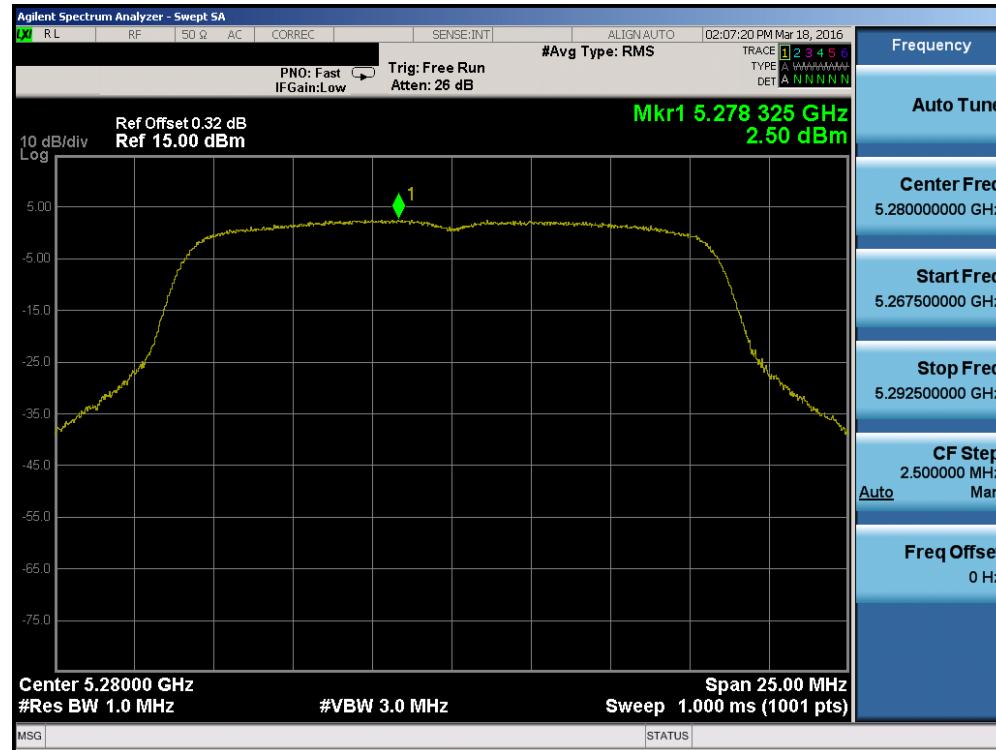


Plot 7-128. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 56)



Plot 7-129. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 64)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 94 of 197

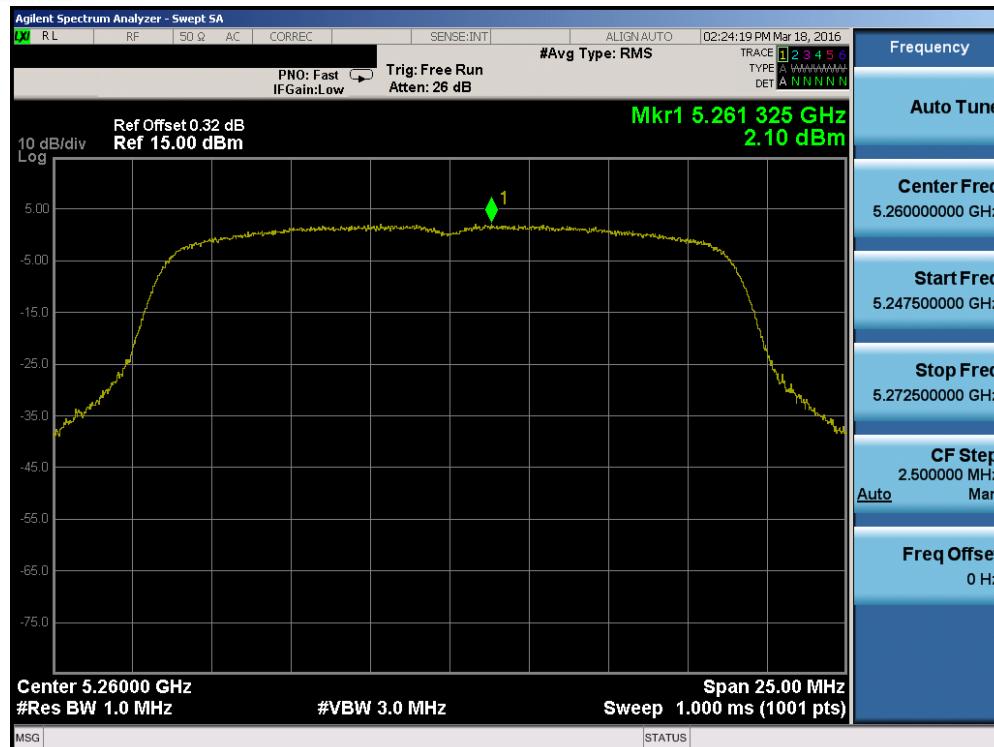


Plot 7-130. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)




Plot 7-131. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 95 of 197

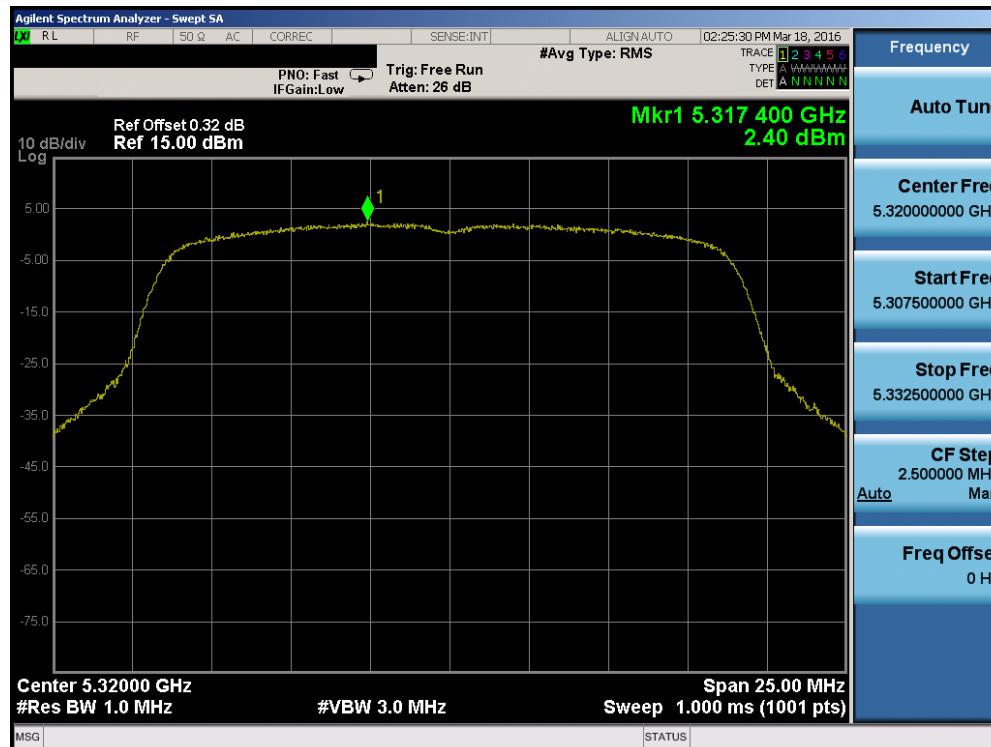

Plot 7-132. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

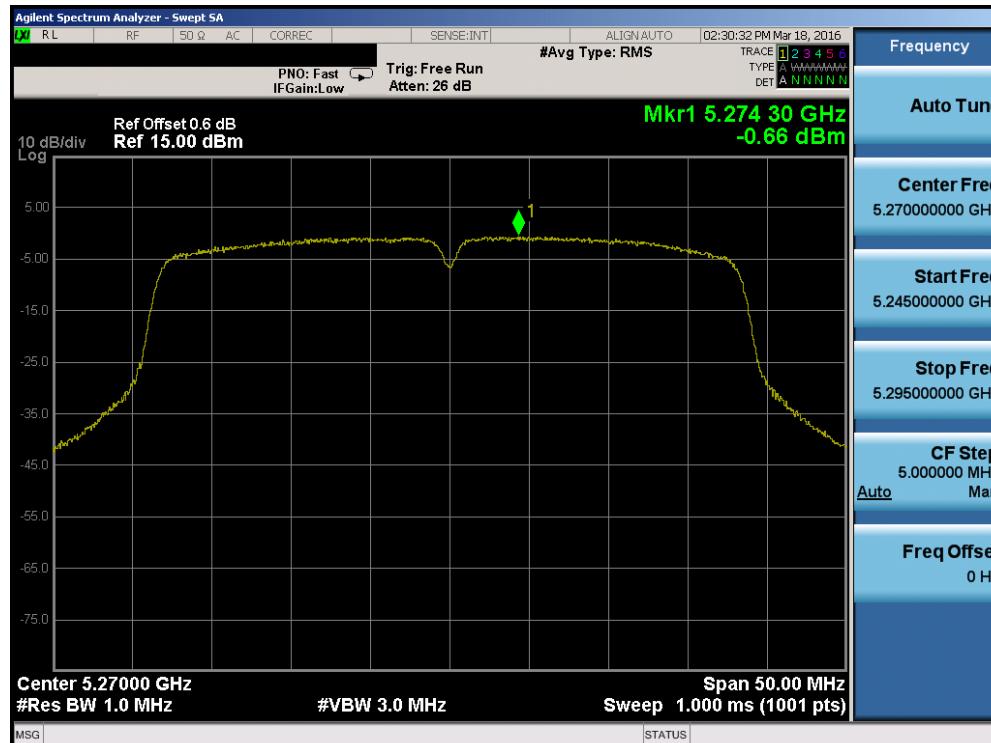

Plot 7-133. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 96 of 197



Plot 7-134. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)



Plot 7-135. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 97 of 197




Plot 7-136. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 100)



Plot 7-137. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 98 of 197

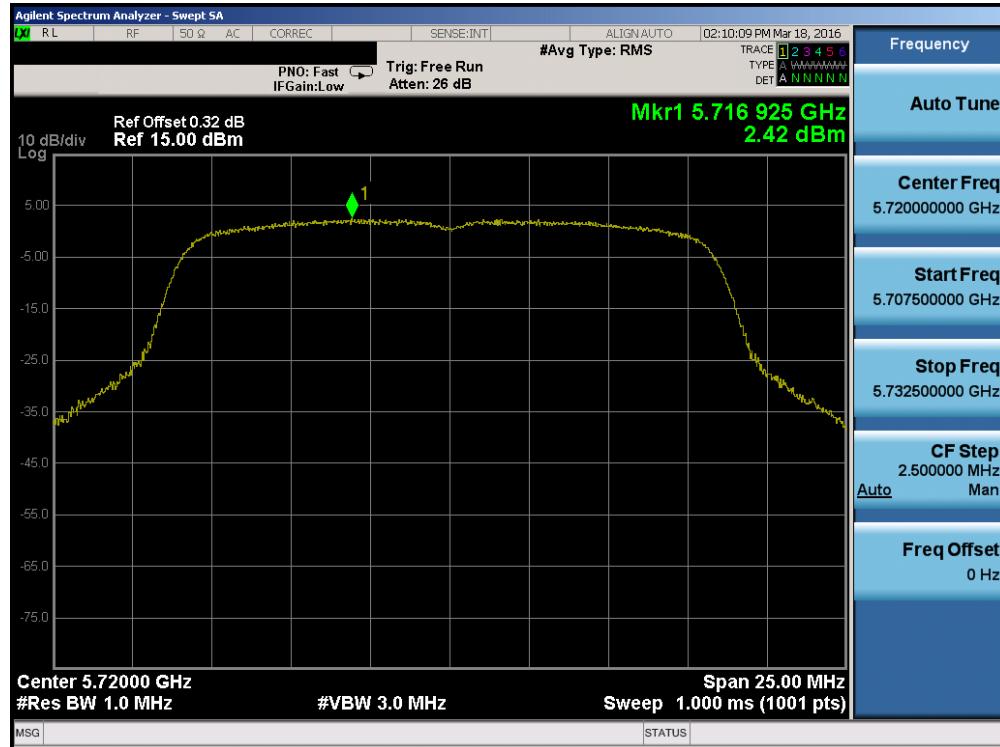

Plot 7-138. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 144)



Plot 7-139. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 99 of 197



Plot 7-140. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)



Plot 7-141. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 144)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 100 of 197




Plot 7-142. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)




Plot 7-143. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 101 of 197

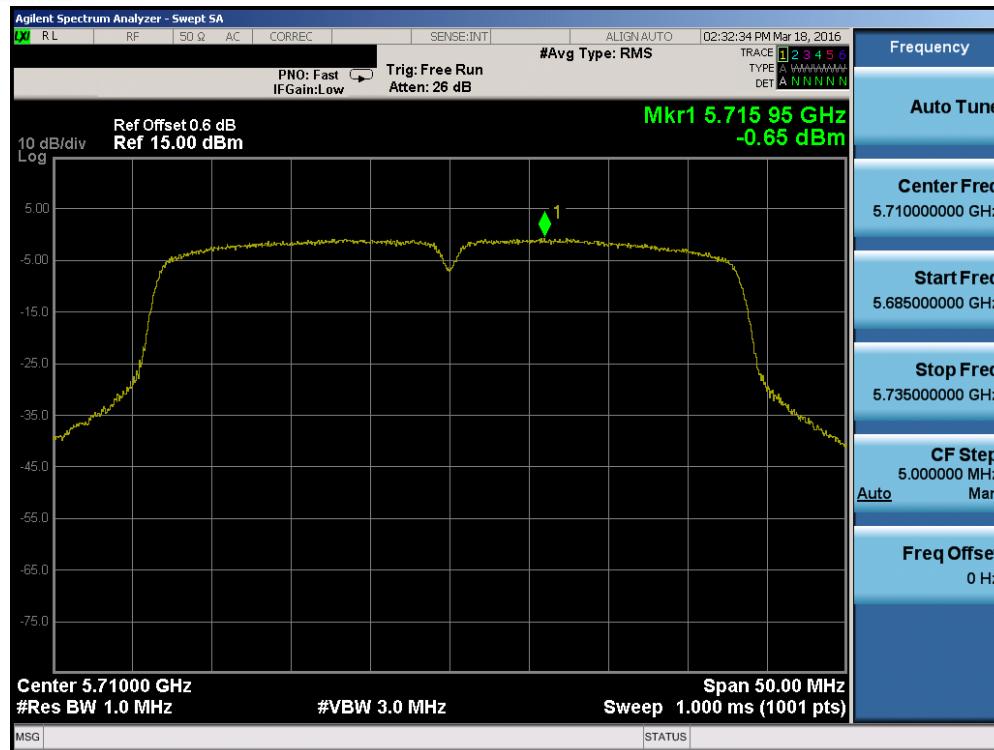

Plot 7-144. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 142)

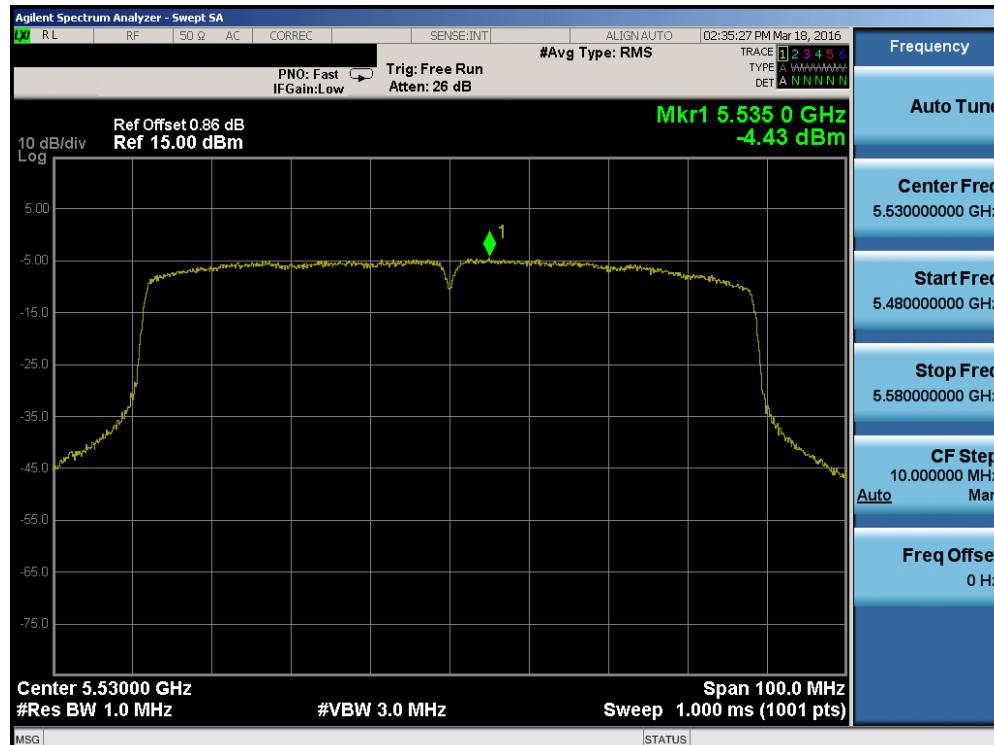


Plot 7-145. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 102 of 197



Plot 7-146. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

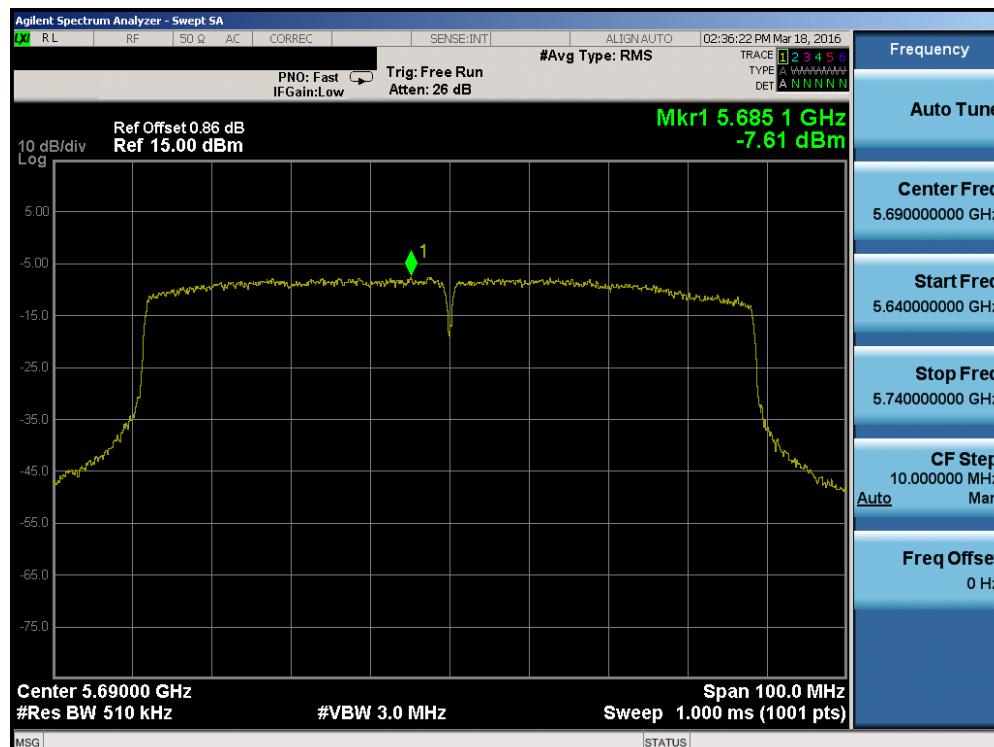


Plot 7-147. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 103 of 197

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]	Pass / Fail
Band 3	5745	149	a	6	-0.35	30.0	-30.35	Pass
	5785	157	a	6	-0.25	30.0	-30.25	Pass
	5825	165	a	6	-0.18	30.0	-30.18	Pass
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	0.33	30.0	-29.67	Pass
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	0.43	30.0	-29.57	Pass
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	0.22	30.0	-29.78	Pass
	5755	151	n (40MHz)	13.5/15 (MCS0)	-3.54	30.0	-33.54	Pass
	5795	159	n (40MHz)	13.5/15 (MCS0)	-3.18	30.0	-33.18	Pass
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-2.84	30.0	-32.84	Pass

Table 7-20. Band 3 Conducted Power Spectral Density Measurements

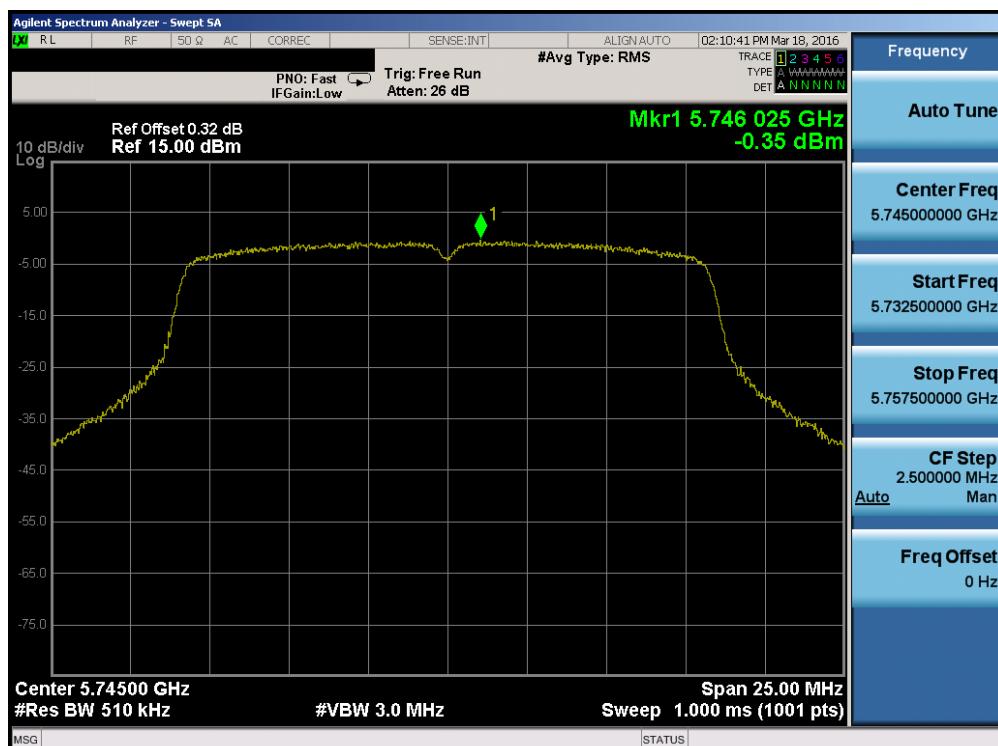

Plot 7-148. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 149)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 104 of 197



Plot 7-149. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 157)




Plot 7-150. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 165)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 105 of 197




Plot 7-151. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

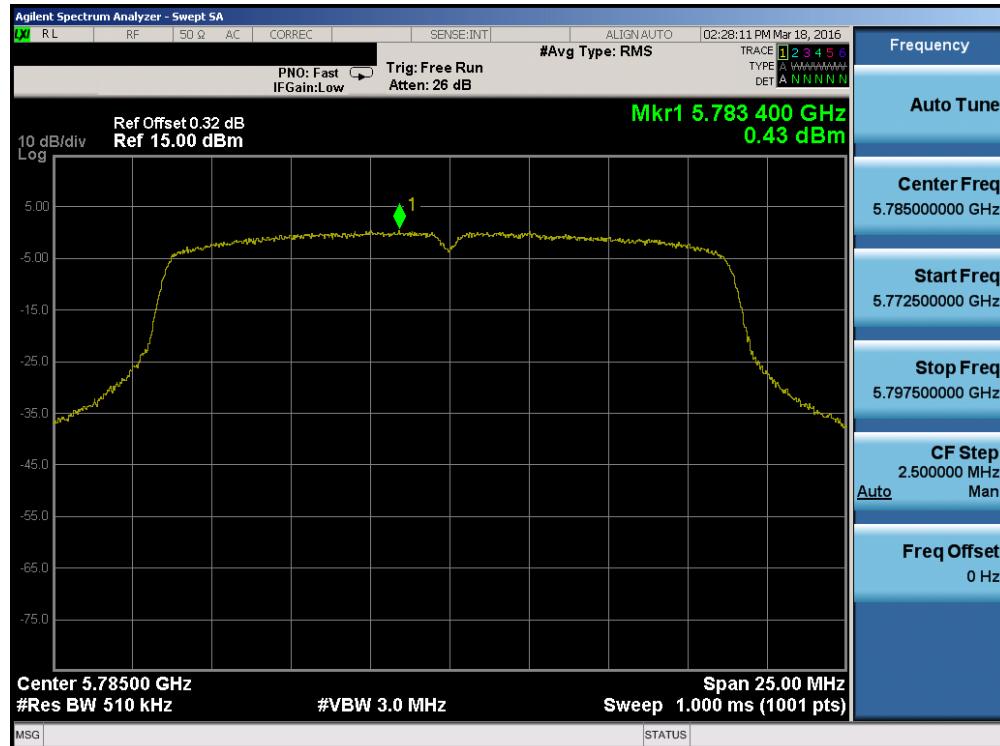

Plot 7-152. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 106 of 197

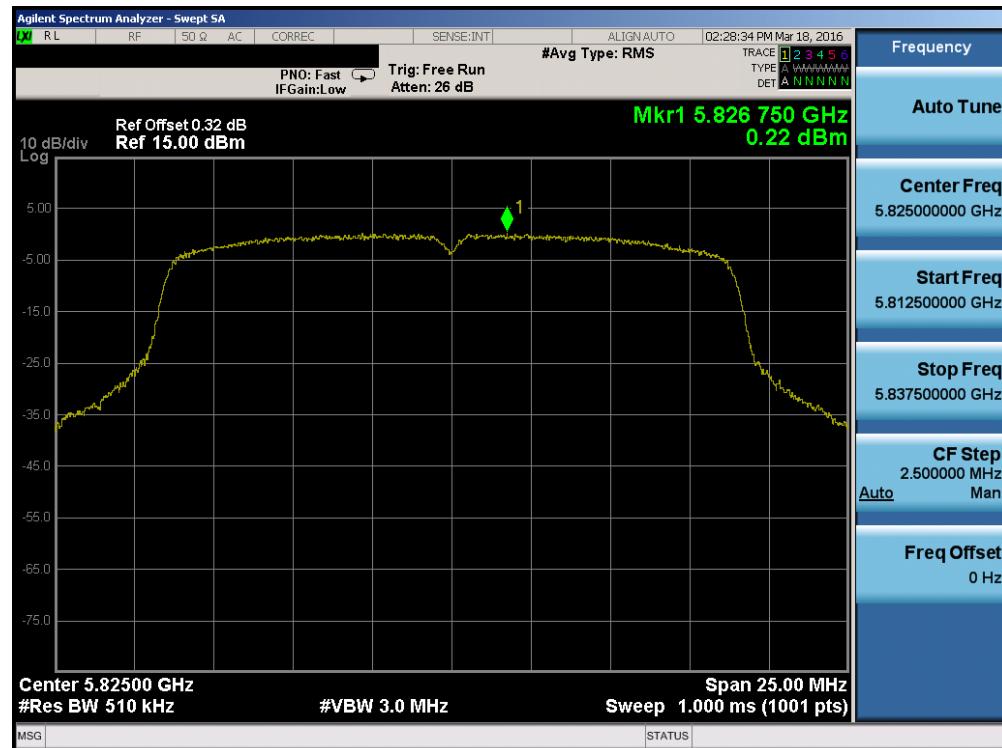


Plot 7-153. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)




Plot 7-154. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 107 of 197

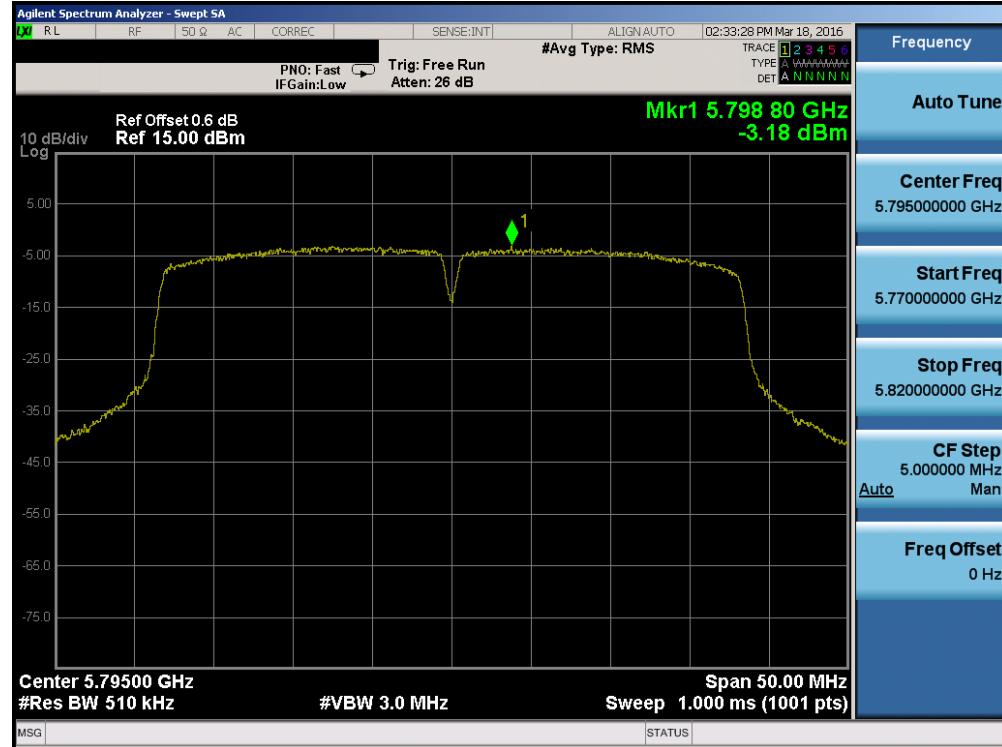

Plot 7-155. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

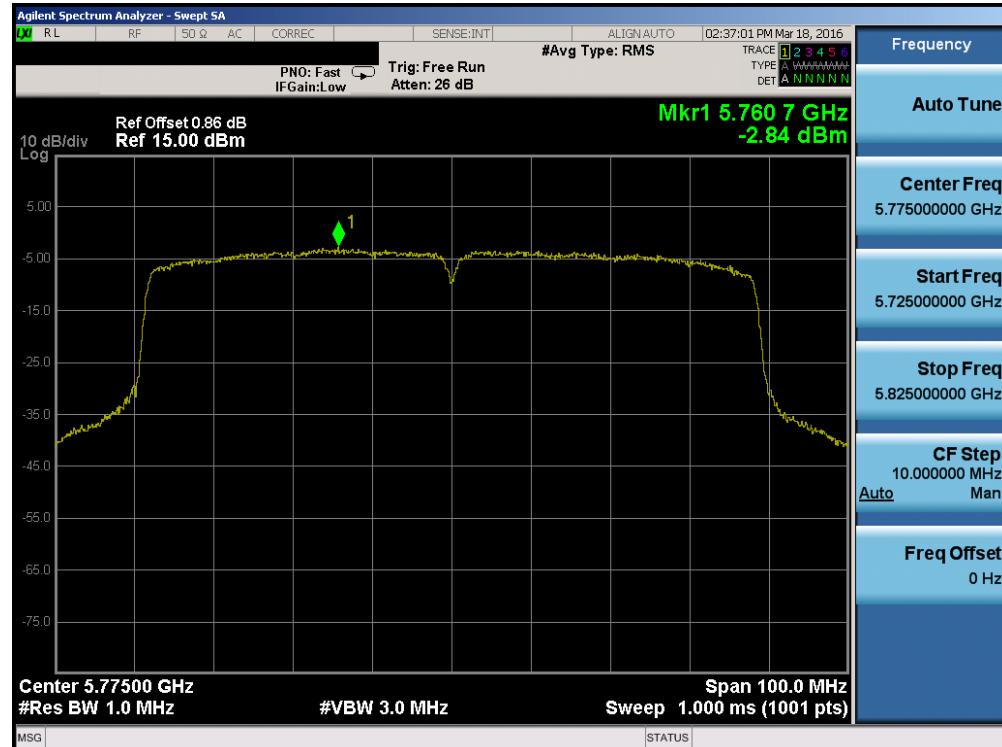

Plot 7-156. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 108 of 197

Summed MIMO Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Antenn-1 Power Density [dBm]	Antenn-2 Power Density [dBm]	Summed MIMO Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]	Pass / Fail
Band 1	5180	36	n (20MHz)	6.5/7.2 (MCS0)	2.37	2.22	5.31	11.0	-5.69	Pass
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	2.74	2.35	5.56	11.0	-5.44	Pass
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	2.92	2.04	5.51	11.0	-5.49	Pass
	5190	38	n (40MHz)	13.5/15 (MCS0)	0.26	-0.46	2.92	11.0	-8.08	Pass
	5230	46	n (40MHz)	13.5/15 (MCS0)	0.32	-0.45	2.96	11.0	-8.04	Pass
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-3.66	-3.67	-0.66	11.0	-11.66	Pass
Band 2A	5260	52	n (20MHz)	6.5/7.2 (MCS0)	2.99	2.10	5.58	11.0	-5.42	Pass
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	2.68	2.18	5.45	11.0	-5.55	Pass
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	2.52	2.40	5.47	11.0	-5.53	Pass
	5270	54	n (40MHz)	13.5/15 (MCS0)	0.22	-0.66	2.81	11.0	-8.19	Pass
	5310	62	n (40MHz)	13.5/15 (MCS0)	-0.44	-0.61	2.49	11.0	-8.51	Pass
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-3.69	-4.07	-0.87	11.0	-11.87	Pass
Band 2C	5500	100	n (20MHz)	6.5/7.2 (MCS0)	2.67	1.94	5.33	11.0	-5.67	Pass
	5600	120	n (20MHz)	6.5/7.2 (MCS0)	2.71	1.93	5.35	11.0	-5.65	Pass
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	2.68	2.07	5.40	11.0	-5.60	Pass
	5510	102	n (40MHz)	13.5/15 (MCS0)	0.42	-0.97	2.79	11.0	-8.21	Pass
	5590	118	n (40MHz)	13.5/15 (MCS0)	0.40	-0.82	2.84	11.0	-8.16	Pass
	5710	142	n (40MHz)	13.5/15 (MCS0)	0.00	-0.65	2.70	11.0	-8.30	Pass
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-3.99	-4.43	-1.20	11.0	-12.20	Pass
	5610	122	ac (80MHz)	29.3/32.5 (MCS0)	-3.87	-4.56	-1.19	11.0	-12.19	Pass

Table 7-21. Bands 1, 2A, 2C MIMO Conducted Power Spectral Density Measurements

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Antenn-1 Power Density [dBm]	Antenn-2 Power Density [dBm]	Summed MIMO Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]	Pass / Fail
Band 3	5745	149	n (20MHz)	6.5/7.2 (MCS0)	0.03	0.33	3.19	30.0	-26.81	Pass
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	-0.12	0.43	3.17	30.0	-26.83	Pass
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	0.14	0.22	3.19	30.0	-26.81	Pass
	5755	151	n (40MHz)	13.5/15 (MCS0)	-2.66	-3.54	-0.07	30.0	-30.07	Pass
	5795	159	n (40MHz)	13.5/15 (MCS0)	-2.62	-3.18	0.12	30.0	-29.88	Pass
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-3.47	-2.84	-0.13	30.0	-30.13	Pass

Table 7-22. Band 3 MIMO Conducted Power Spectral Density Measurements

Note:

Per KDB 662911 v02r01 Section E)2), the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample MIMO Calculation:

At 5180MHz the average conducted power spectral density was measured to be 2.37 dBm for Antenna-1 and 2.22 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(2.37 \text{ dBm} + 2.22 \text{ dBm}) = (1.72 \text{ mW} + 1.67 \text{ mW}) = 3.39 \text{ mW} = 5.31 \text{ dBm}$$

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 109 of 197

7.6 Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,180,000,000 Hz
 CHANNEL: 36
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,179,999,982	-18	-0.00000035
100 %		- 30	5,179,999,784	-216	-0.00000417
100 %		- 20	5,179,999,990	-10	-0.00000019
100 %		- 10	5,180,000,174	174	0.00000336
100 %		0	5,179,999,854	-146	-0.00000282
100 %		+ 10	5,179,999,956	-44	-0.00000085
100 %		+ 20	5,180,000,003	3	0.00000006
100 %		+ 30	5,179,999,965	-35	-0.00000068
100 %		+ 40	5,180,000,129	129	0.00000249
100 %		+ 50	5,179,999,830	-170	-0.00000328
BATT. ENDPOINT	3.45	+ 20	5,180,000,234	234	0.00000452

Table 7-23. Frequency Stability Measurements for UNII Band 1 (Ch. 36)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 110 of 197



Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,260,000,000 Hz
 CHANNEL: 52
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,259,999,828	-172	-0.00000327
100 %		- 30	5,260,000,001	1	0.00000002
100 %		- 20	5,259,999,984	-16	-0.00000030
100 %		- 10	5,259,999,763	-237	-0.00000451
100 %		0	5,259,999,719	-281	-0.00000534
100 %		+ 10	5,259,999,891	-109	-0.00000207
100 %		+ 20	5,260,000,188	188	0.00000357
100 %		+ 30	5,259,999,986	-14	-0.00000027
100 %		+ 40	5,260,000,277	277	0.00000527
100 %		+ 50	5,260,000,136	136	0.00000259
BATT. ENDPOINT	3.45	+ 20	5,260,000,162	162	0.00000308

Table 7-24. Frequency Stability Measurements for UNII Band 2A (Ch. 52)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 111 of 197



Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,500,000,000 Hz
 CHANNEL: 100
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,500,000,245	245	0.00000445
100 %		- 30	5,500,000,109	109	0.00000198
100 %		- 20	5,499,999,904	-96	-0.00000175
100 %		- 10	5,499,999,857	-143	-0.00000260
100 %		0	5,499,999,747	-253	-0.00000460
100 %		+ 10	5,500,000,180	180	0.00000327
100 %		+ 20	5,499,999,980	-20	-0.00000036
100 %		+ 30	5,499,999,846	-154	-0.00000280
100 %		+ 40	5,500,000,002	2	0.00000004
100 %		+ 50	5,499,999,867	-133	-0.00000242
BATT. ENDPOINT	3.45	+ 20	5,499,999,858	-142	-0.00000258

Table 7-25. Frequency Stability Measurements for UNII Band 2C (Ch. 100)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 112 of 197



Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,745,000,000 Hz
 CHANNEL: 149
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	5,745,000,268	268	0.00000466
100 %		- 30	5,745,000,132	132	0.00000230
100 %		- 20	5,745,000,022	22	0.00000038
100 %		- 10	5,745,000,012	12	0.00000021
100 %		0	5,744,999,839	-161	-0.00000280
100 %		+ 10	5,744,999,949	-51	-0.00000089
100 %		+ 20	5,745,000,247	247	0.00000430
100 %		+ 30	5,745,000,364	364	0.00000634
100 %		+ 40	5,745,000,053	53	0.00000092
100 %		+ 50	5,745,000,092	92	0.00000160
BATT. ENDPOINT	3.45	+ 20	5,744,999,923	-77	-0.00000134

Table 7-26. Frequency Stability Measurements for UNII Band 3 (Ch. 149)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 113 of 197

7.7 Radiated Spurious Emission Measurements – Above 1GHz

§15.407(b.1)(b.6) §15.205 §15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 D02 v01r02, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW), and 802.11ac (80MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-27 per Section 15.209.

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-27. Radiated Limits

Test Procedures Used

KDB 789033 D02 v01r02 – Section G

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times$ span/RBW)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 114 of 197

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

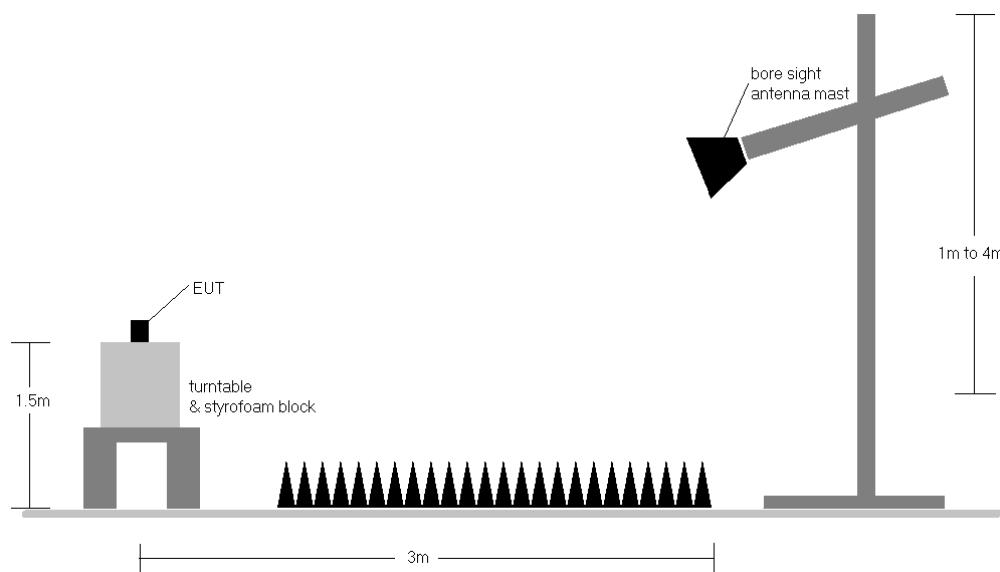


Figure 7-5. Test Instrument & Measurement Setup

Test Notes

1. All radiated spurious emissions levels were measured in a radiated test setup per the guidance of KDB 789033 D02 v01r02 Section G.
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 7-27.
3. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-11. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 115 of 197

4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. This unit was tested with its standard battery.
6. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
7. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
8. Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst case emissions. Since the emissions produced from MIMO operation were found to be more than 20dB below the limit, the MIMO emissions are not reported.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section. Rohde & Schwarz EMC32, Version 9.15.00 automated test software was used to perform the Radiated Spurious Emissions Pre-Scan testing.
10. The “-” shown in the RSE tables below denotes a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $[\text{dB}_{\mu\text{V/m}}]$ = Analyzer Level $[\text{dBm}]$ + 107 + AFCL $[\text{dB}/\text{m}]$
- AFCL $[\text{dB}/\text{m}]$ = Antenna Factor $[\text{dB}/\text{m}]$ + Cable Loss $[\text{dB}]$
- Margin $[\text{dB}]$ = Field Strength Level $[\text{dB}_{\mu\text{V/m}}]$ – Limit $[\text{dB}_{\mu\text{V/m}}]$


Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:


$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 116 of 197


7.7.1 Antenna-1 Radiated Spurious Emission Measurements

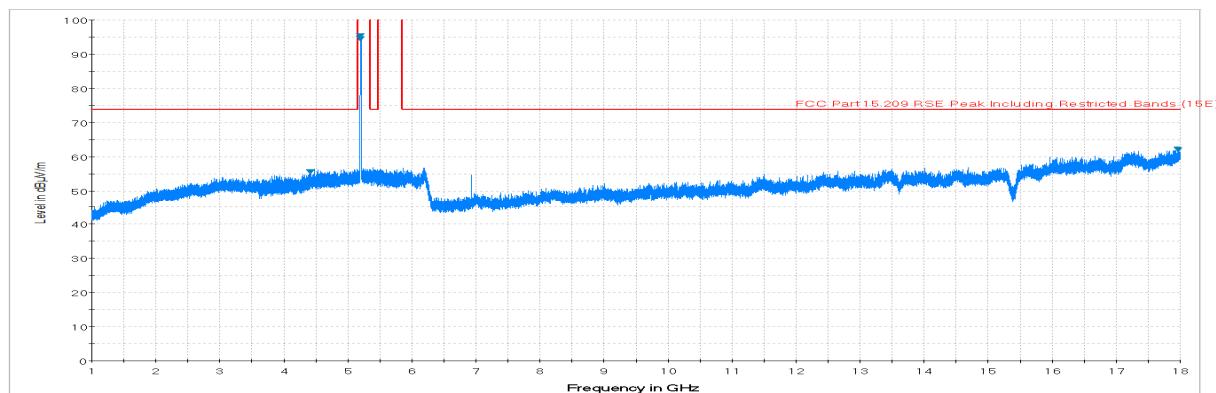

Plot 7-157. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. H)

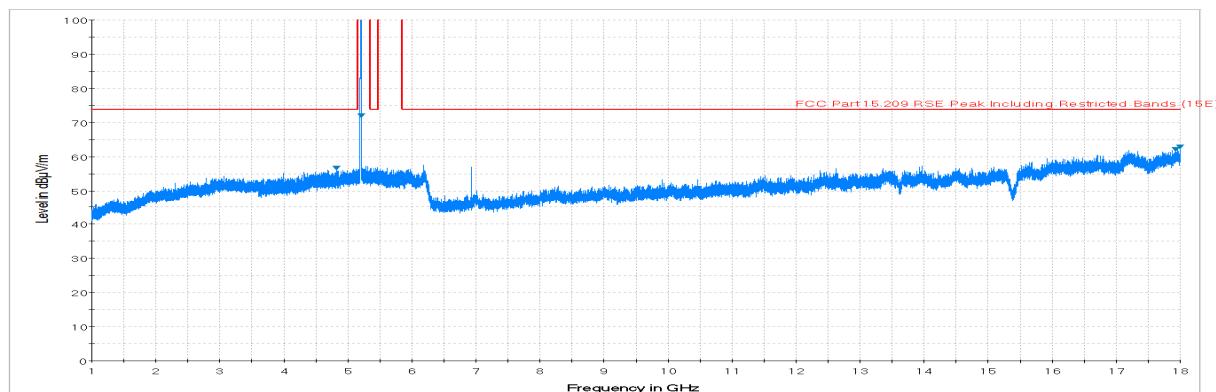


Plot 7-158. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. V)

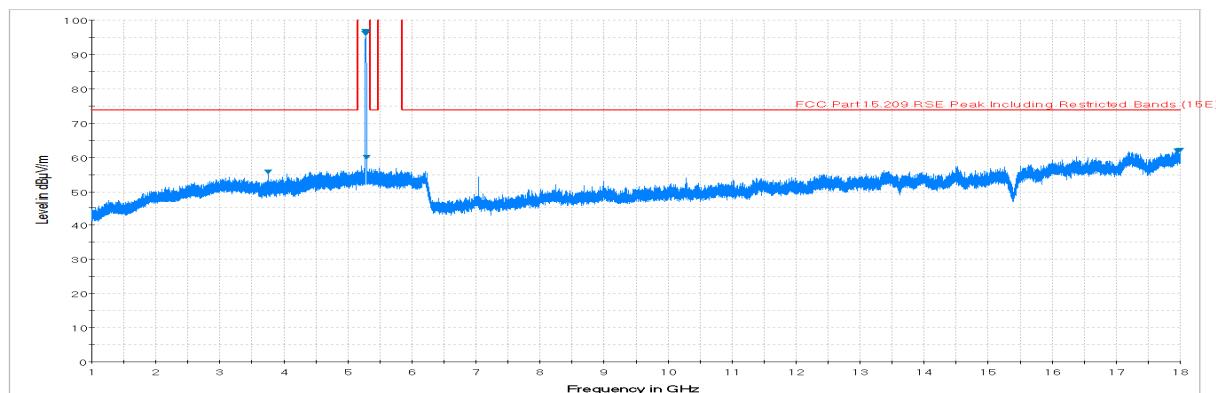


Plot 7-159. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. H)


FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 117 of 197

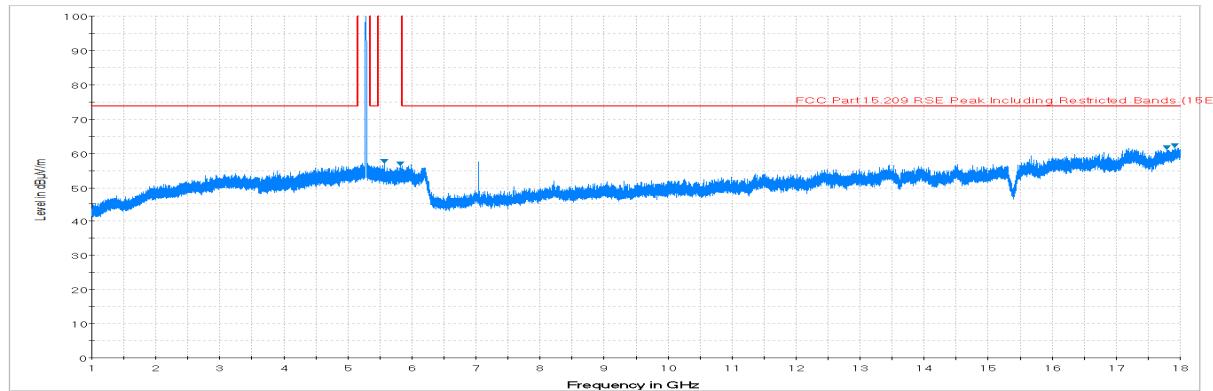

Plot 7-160. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. V)

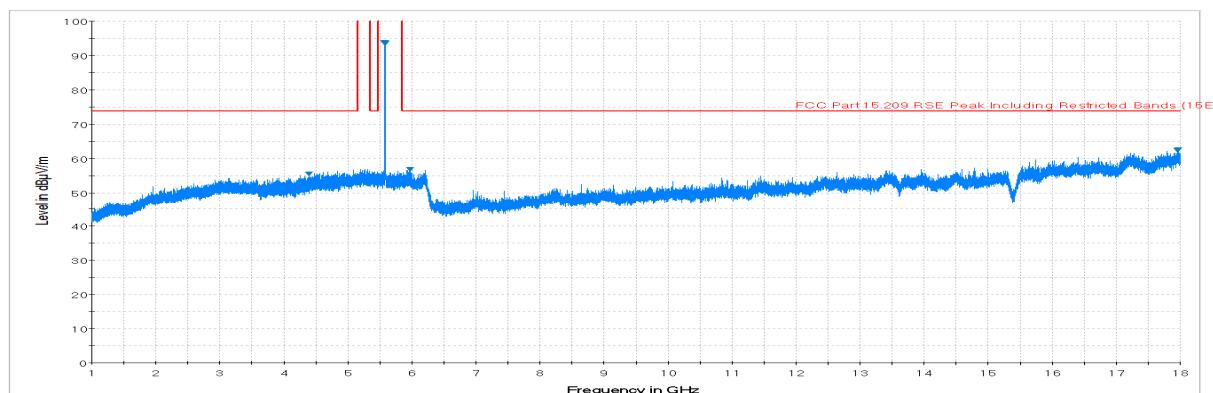


Plot 7-161. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. H)

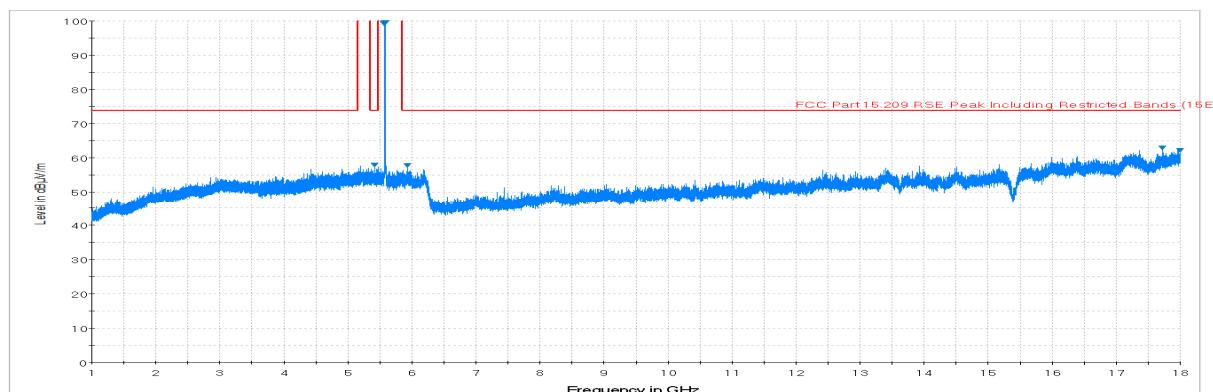


Plot 7-162. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. V)

FCC ID: A3LSMT713	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 118 of 197

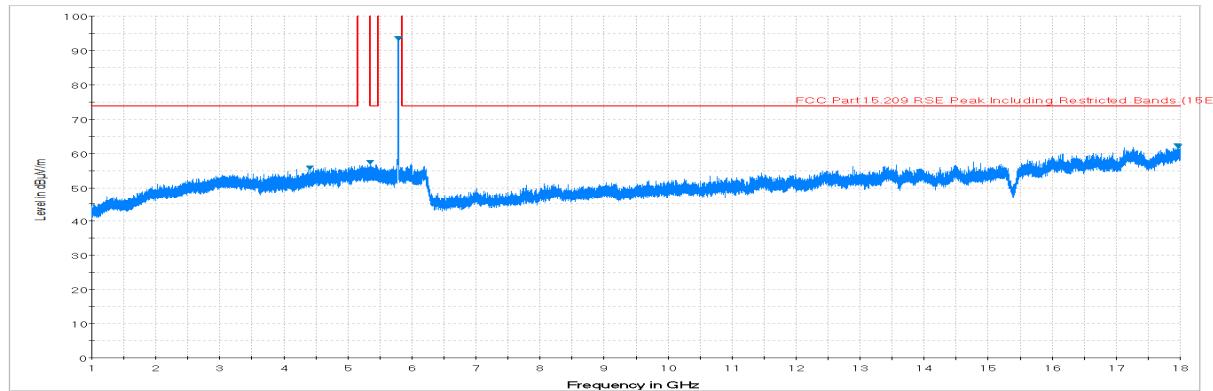

Plot 7-163. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

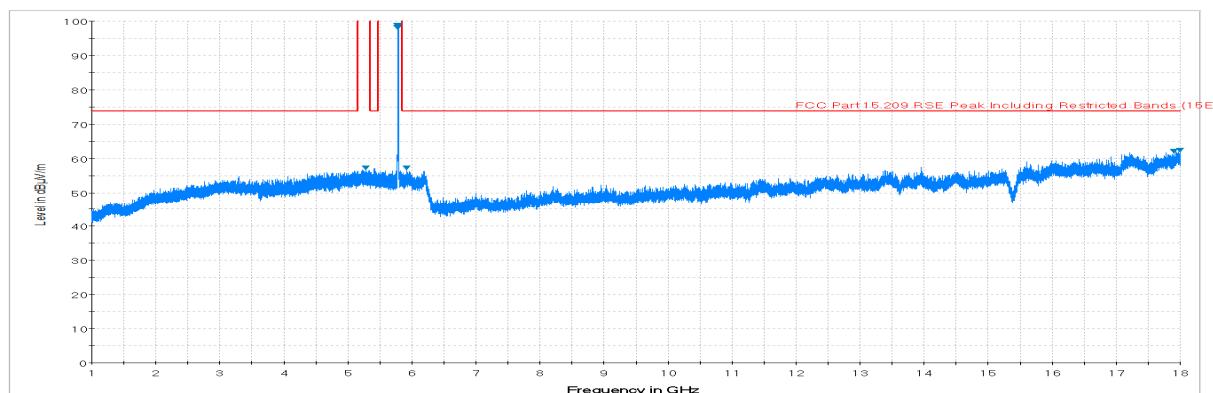


Plot 7-164. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)

FCC ID: A3LSMT713	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 119 of 197




Antenna-1 Radiated Spurious Emissions Measurements (Above 18GHz)

\$15.209

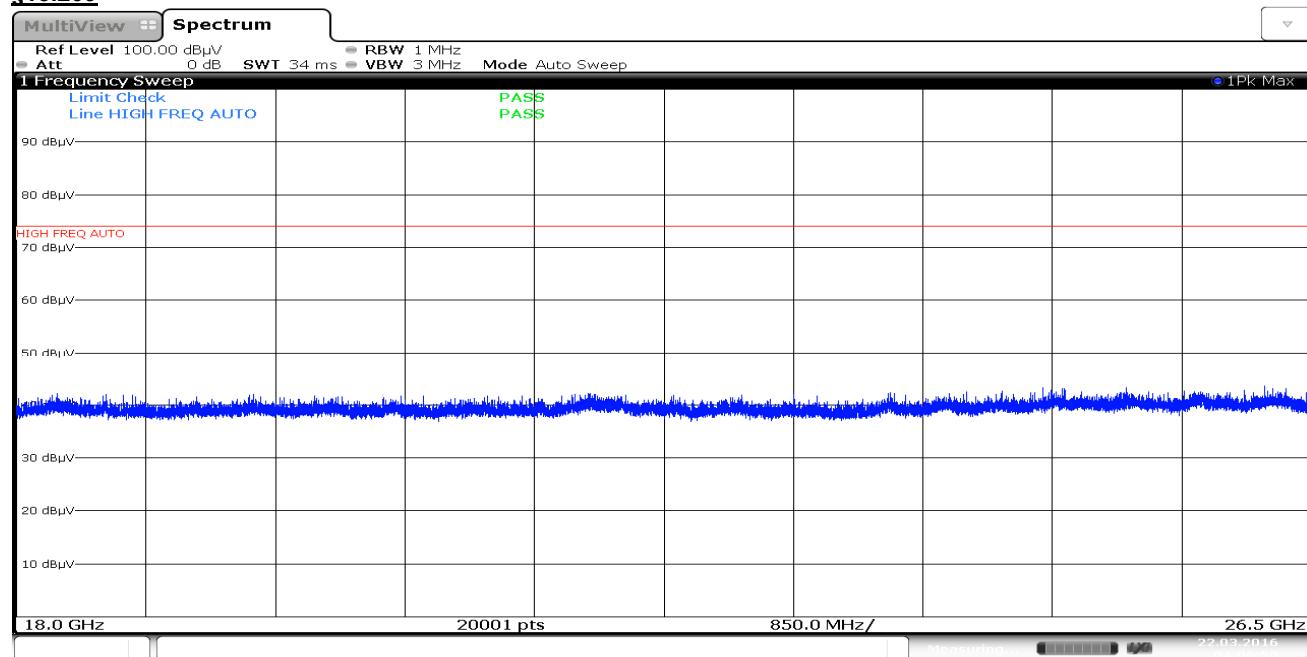

Date: 22.MAR.2016 04:06:51

Plot 7-165. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. H)

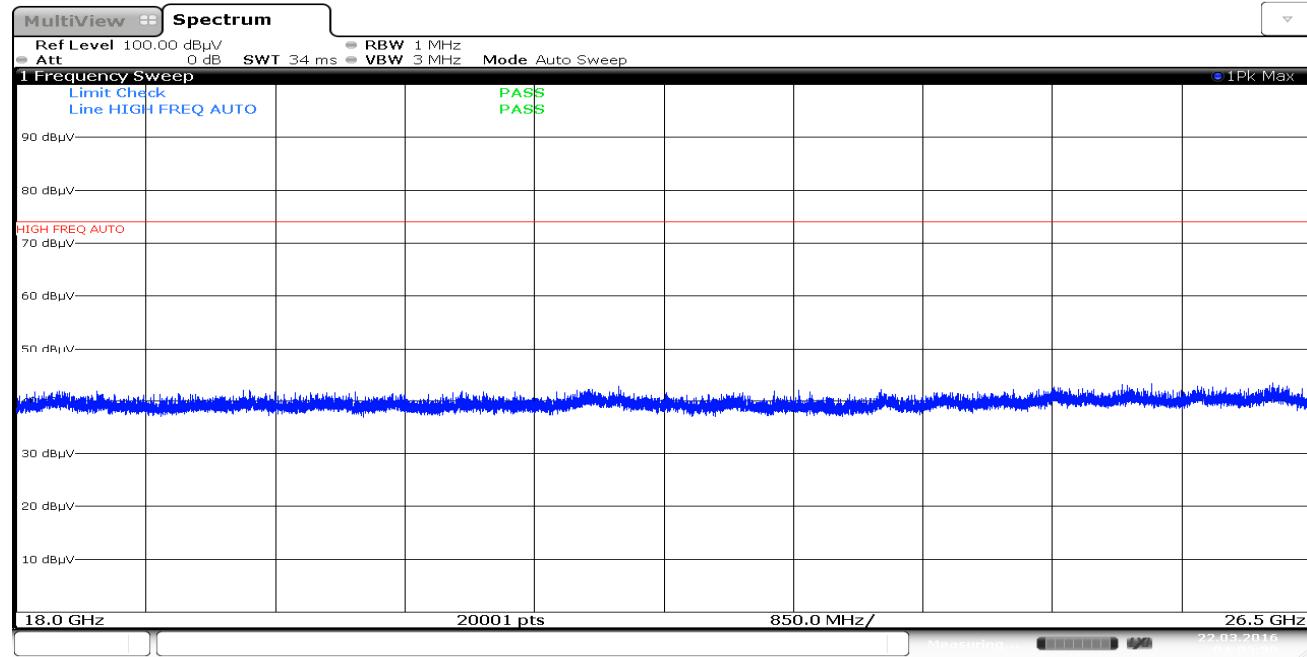

Date: 22.MAR.2016 04:05:30

Plot 7-166. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. V)

FCC ID: A3LSMT713	PCTEST Engineering Laboratory, Inc.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 120 of 197



Antenna-1 Radiated Spurious Emission Measurements

§15.247(d) §15.205 & §15.209

Worst Case Mode:	802.11a
Worst Case Transfer Rate:	6 Mbps
Distance of Measurements:	1 & 3 Meters
Operating Frequency:	5180MHz
Channel:	36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10360.00	Peak	H	-	-	-98.23	47.23	0.00	55.99	68.20	-12.21
* 15540.00	Average	H	-	-	-111.94	54.98	0.00	50.04	53.98	-3.94
* 15540.00	Peak	H	-	-	-99.83	54.98	0.00	62.15	73.98	-11.83
* 20720.00	Average	H	-	-	-112.46	44.39	-9.54	29.38	53.98	-24.60
* 20720.00	Peak	H	-	-	-102.13	44.39	-9.54	39.71	73.98	-34.27
25900.00	Peak	H	-	-	-99.21	45.11	-9.54	43.36	68.20	-24.84

Table 7-28. Radiated Measurements

Worst Case Mode:	802.11a
Worst Case Transfer Rate:	6 Mbps
Distance of Measurements:	1 & 3 Meters
Operating Frequency:	5200MHz
Channel:	40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10400.00	Peak	H	-	-	-97.76	47.44	0.00	56.68	68.20	-11.52
* 15600.00	Average	H	-	-	-111.82	55.19	0.00	50.38	53.98	-3.60
* 15600.00	Peak	H	-	-	-99.55	55.19	0.00	62.65	73.98	-11.33
* 20800.00	Average	H	-	-	-112.32	44.39	-9.54	29.53	53.98	-24.45
* 20800.00	Peak	H	-	-	-100.58	44.39	-9.54	41.27	73.98	-32.71
26000.00	Peak	H	-	-	-99.35	45.12	-9.54	43.22	68.20	-24.98

Table 7-29. Radiated Measurements

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 121 of 197



Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10480.00	Peak	H	-	-	-98.80	47.79	0.00	55.99	68.20	-12.21
* 15720.00	Average	H	-	-	-110.43	54.46	0.00	51.03	53.98	-2.95
* 15720.00	Peak	H	-	-	-98.11	54.46	0.00	63.35	73.98	-10.63
* 20960.00	Average	H	-	-	-113.30	44.31	-9.54	28.47	53.98	-25.51
* 20960.00	Peak	H	-	-	-100.65	44.31	-9.54	41.12	73.98	-32.86
26200.00	Peak	H	-	-	-99.67	45.01	-9.54	42.80	68.20	-25.40

Table 7-30. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10520.00	Peak	H	-	-	-99.12	47.85	0.00	55.73	68.20	-12.47
* 15780.00	Average	H	-	-	-111.64	54.20	0.00	49.56	53.98	-4.42
* 15780.00	Peak	H	-	-	-100.31	54.20	0.00	60.89	73.98	-13.09
* 21040.00	Average	H	-	-	-113.04	44.29	-9.54	28.71	53.98	-25.27
* 21040.00	Peak	H	-	-	-99.70	44.29	-9.54	42.05	73.98	-31.93
26300.00	Peak	H	-	-	-99.31	45.00	-9.54	43.14	68.20	-25.06

Table 7-31. Radiated Measurements

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 122 of 197



Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10560.00	Peak	H	-	-	-98.66	47.79	0.00	56.13	68.20	-12.07
* 15840.00	Average	H	-	-	-111.24	54.40	0.00	50.16	53.98	-3.82
* 15840.00	Peak	H	-	-	-99.77	54.40	0.00	61.63	73.98	-12.35
* 21120.00	Average	H	-	-	-113.24	44.28	-9.54	28.49	53.98	-25.49
* 21120.00	Peak	H	-	-	-101.64	44.28	-9.54	40.09	73.98	-33.89
26400.00	Peak	H	-	-	-99.29	45.02	-9.54	43.19	68.20	-25.01

Table 7-32. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 10640.00	Average	H	-	-	-110.19	47.75	0.00	44.57	53.98	-9.41
* 10640.00	Peak	H	-	-	-98.29	47.75	0.00	56.47	73.98	-17.51
* 15960.00	Average	H	-	-	-111.20	55.02	0.00	50.82	53.98	-3.16
* 15960.00	Peak	H	-	-	-99.54	55.02	0.00	62.48	73.98	-11.50
* 21280.00	Average	H	-	-	-113.72	44.26	-9.54	28.00	53.98	-25.97
* 21280.00	Peak	H	-	-	-100.55	44.26	-9.54	41.17	73.98	-32.80
26600.00	Peak	H	-	-	-101.85	47.61	-9.54	43.21	68.20	-24.99

Table 7-33. Radiated Measurements

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 123 of 197



Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 11000.00	Average	H	-	-	-109.50	48.21	0.00	45.71	53.98	-8.27
* 11000.00	Peak	H	-	-	-97.89	48.21	0.00	57.32	73.98	-16.66
16500.00	Peak	H	-	-	-98.88	55.07	0.00	63.19	68.20	-5.01
22000.00	Peak	H	-	-	-100.49	44.50	-9.54	41.47	68.20	-26.73
27500.00	Peak	H	-	-	-102.06	47.97	-9.54	43.37	68.20	-24.83

Table 7-34. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5600MHz
 Channel: 120

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 11200.00	Average	H	-	-	-110.30	48.06	0.00	44.76	53.98	-9.22
* 11200.00	Peak	H	-	-	-98.07	48.06	0.00	56.99	73.98	-16.99
16800.00	Peak	H	-	-	-99.77	55.67	0.00	62.90	68.20	-5.30
* 22400.00	Average	H	-	-	-113.72	44.57	-9.54	28.31	53.98	-25.67
* 22400.00	Peak	H	-	-	-101.56	44.57	-9.54	40.47	73.98	-33.51
28000.00	Peak	H	-	-	-102.62	48.11	-9.54	42.95	68.20	-25.25

Table 7-35. Radiated Measurements

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 124 of 197

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5720MHz
 Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	
*	11440.00	Average	H	-	-	-110.32	48.92	0.00	45.60	53.98	-8.38
*	11440.00	Peak	H	-	-	-98.25	48.92	0.00	57.67	73.98	-16.31
	17160.00	Peak	H	-	-	-97.71	54.87	0.00	64.16	68.20	-4.04
*	22880.00	Average	H	-	-	-113.71	44.61	-9.54	28.36	53.98	-25.62
*	22880.00	Peak	H	-	-	-100.97	44.61	-9.54	41.10	73.98	-32.88
	28600.00	Peak	H	-	-	-101.90	48.29	-9.54	43.85	68.20	-24.35

Table 7-36. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	
*	11490.00	Average	H	-	-	-110.21	49.06	0.00	45.85	53.98	-8.13
*	11490.00	Peak	H	-	-	-98.10	49.06	0.00	57.96	73.98	-16.02
	17235.00	Peak	H	-	-	-99.69	54.89	0.00	62.20	68.20	-6.00
*	22980.00	Average	H	-	-	-113.63	44.68	-9.54	28.51	53.98	-25.47
*	22980.00	Peak	H	-	-	-102.04	44.68	-9.54	40.10	73.98	-33.88
	28725.00	Peak	H	-	-	-102.31	48.26	-9.54	43.41	68.20	-24.79

Table 7-37. Radiated Measurements

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 125 of 197



Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 11570.00	Average	H	-	-	-110.25	48.97	0.00	45.72	53.98	-8.26
* 11570.00	Peak	H	-	-	-98.24	48.97	0.00	57.73	73.98	-16.25
17355.00	Peak	H	-	-	-98.48	55.38	0.00	63.90	68.20	-4.30
23140.00	Peak	H	-	-	-100.80	44.75	-9.54	41.41	68.20	-26.79
28925.00	Peak	H	-	-	-102.73	48.29	-9.54	43.02	68.20	-25.18

Table 7-38. Radiated Measurements


Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 11650.00	Average	H	-	-	-110.34	48.92	0.00	45.58	53.98	-8.40
* 11650.00	Peak	H	-	-	-98.00	48.92	0.00	57.92	73.98	-16.06
17475.00	Peak	H	-	-	-98.72	56.15	0.00	64.43	68.20	-3.77
23300.00	Peak	H	-	-	-101.18	44.75	-9.54	41.03	68.20	-27.17
29125.00	Peak	H	-	-	-101.80	48.28	-9.54	43.94	68.20	-24.26


Table 7-39. Radiated Measurements

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 126 of 197


7.7.2 Antenna-2 Radiated Spurious Emission Measurements

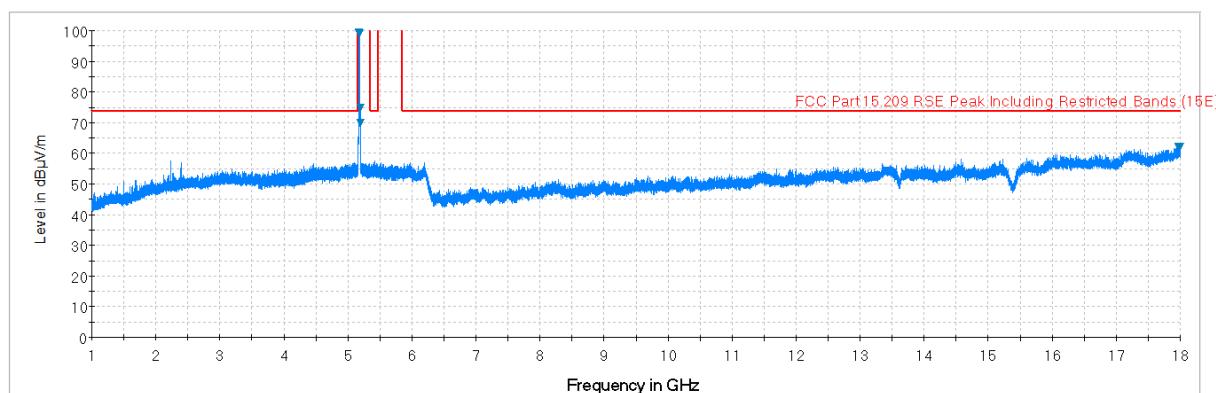

Plot 7-167. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. H)

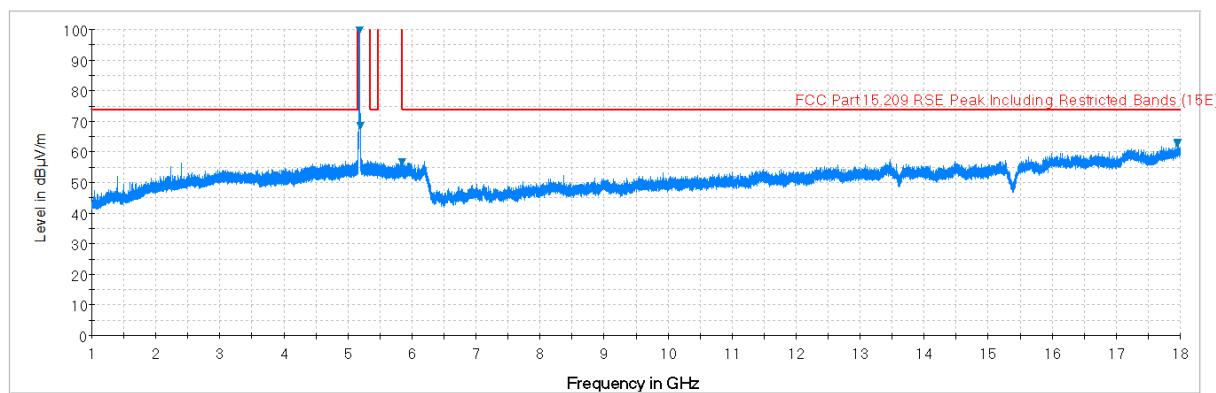


Plot 7-168. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40, Ant. Pol. V)

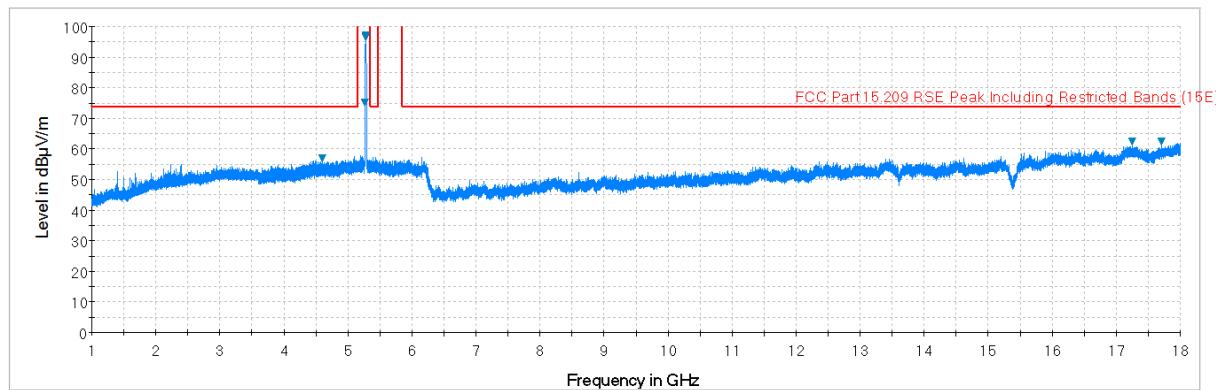


Plot 7-169. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. H)


FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 127 of 197

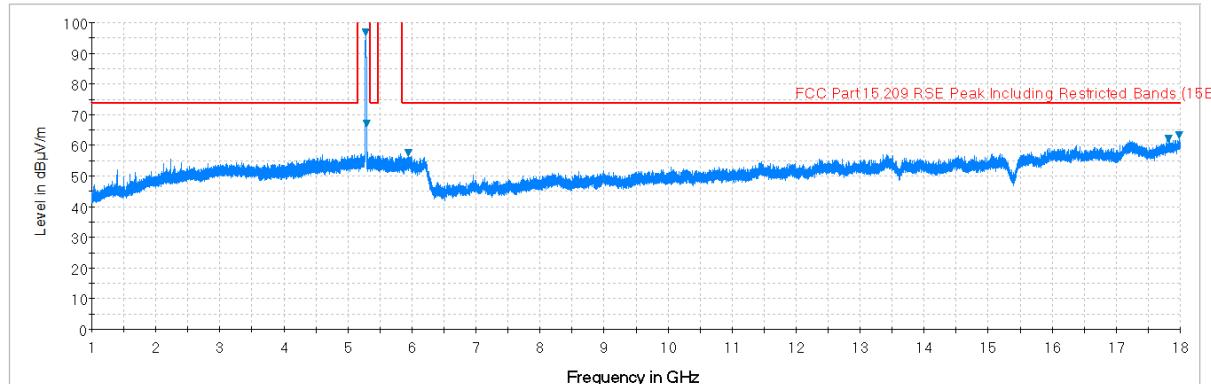

Plot 7-170. Radiated Spurious Plot above 1GHz (802.11a – U2A Ch. 56, Ant. Pol. V)

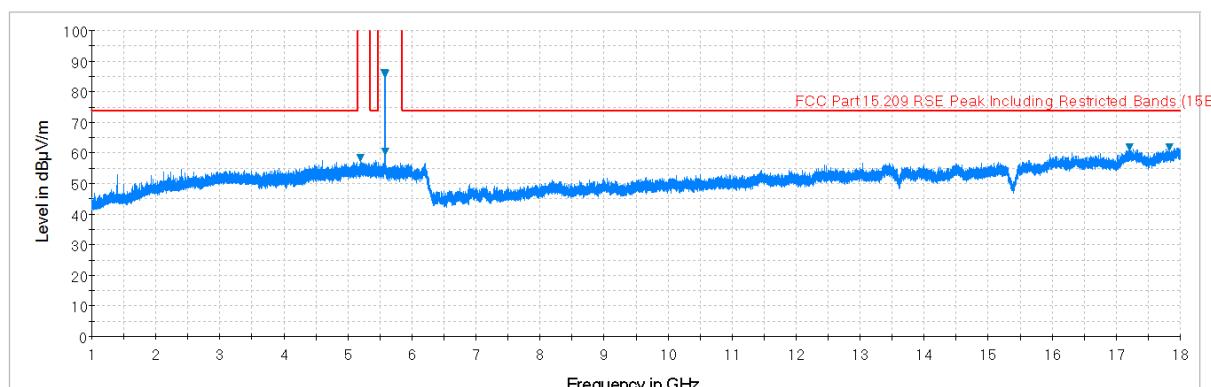


Plot 7-171. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. H)

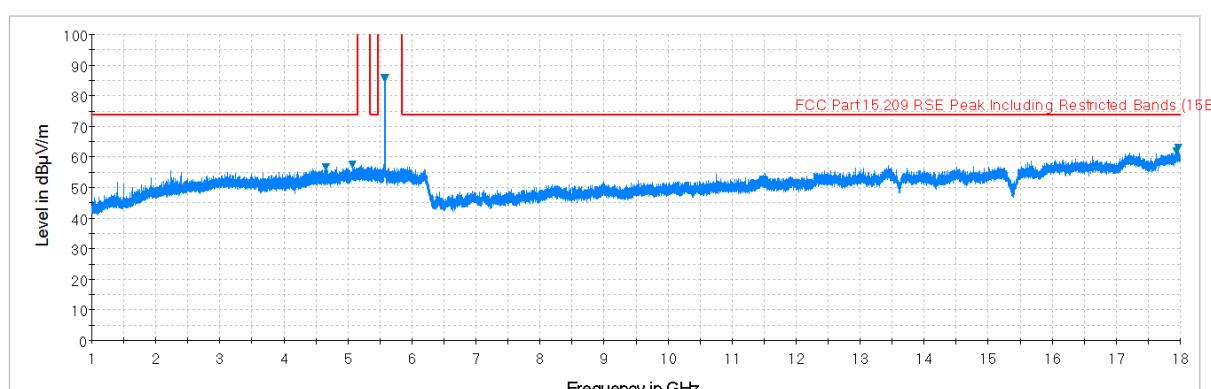


Plot 7-172. Radiated Spurious Plot above 1GHz (802.11a – U2C Ch. 116, Ant. Pol. V)

FCC ID: A3LSMT713	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 128 of 197

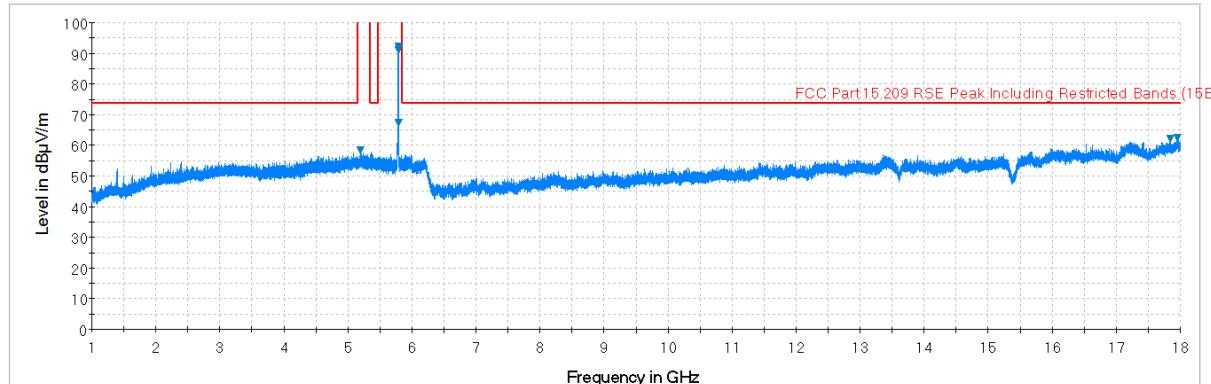

Plot 7-173. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

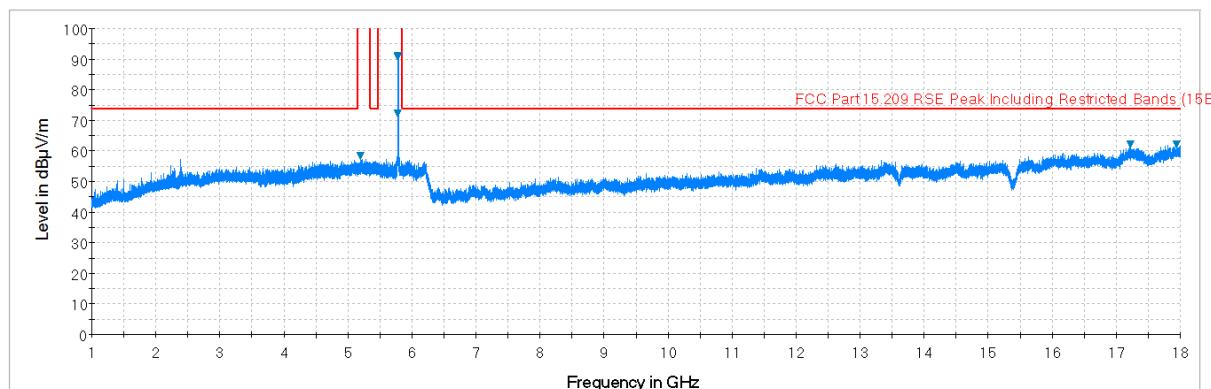


Plot 7-174. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)

FCC ID: A3LSMT713	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 129 of 197




Antenna-2 Radiated Spurious Emissions Measurements (Above 18GHz)

\$15.209

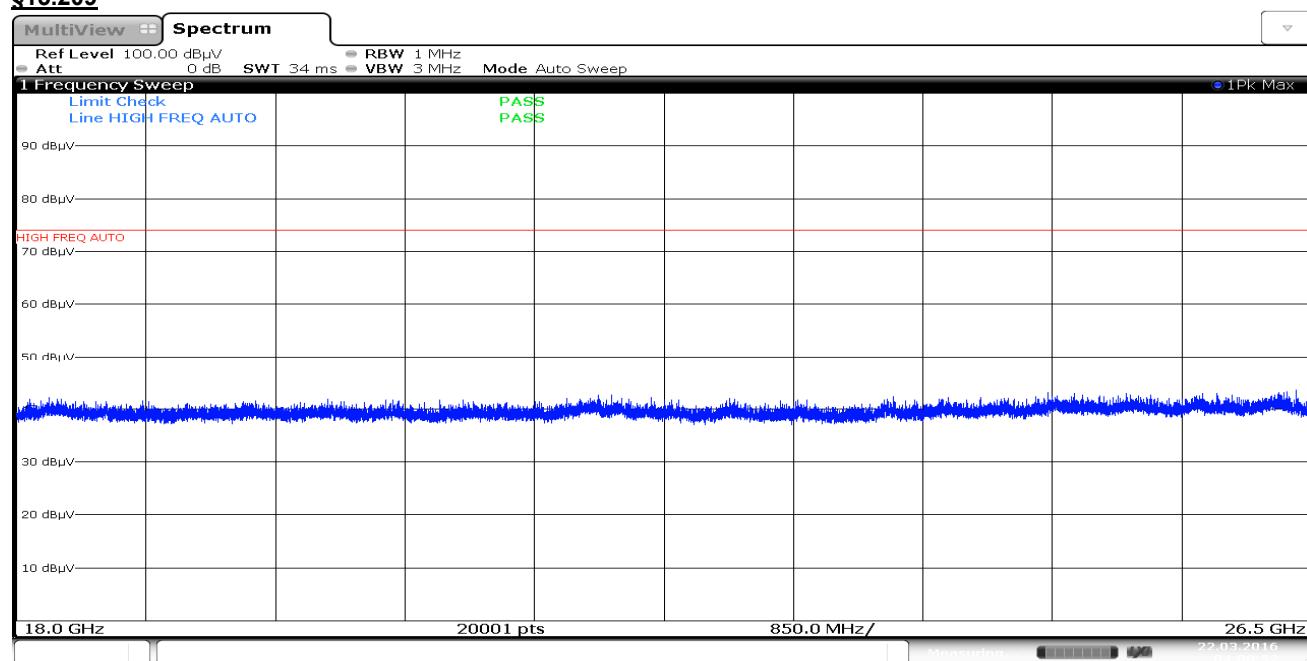

Date: 22.MAR.2016 04:08:52

Plot 7-175. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. H)

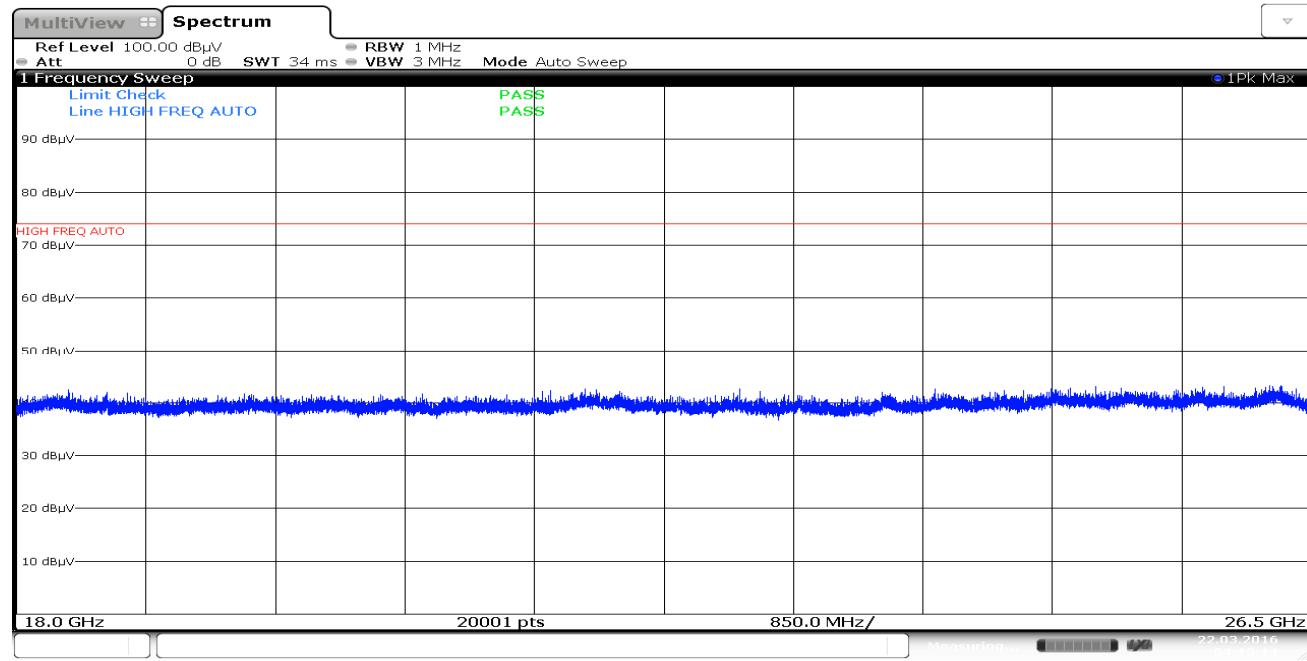

Date: 22.MAR.2016 04:15:14

Plot 7-176. Radiated Spurious Plot above 18GHz (802.11a – Ant. Pol. V)

FCC ID: A3LSMT713	PCTEST Engineering Laboratory, Inc.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 130 of 197



Antenna-2 Radiated Spurious Emission Measurements

[§15.247\(d\)](#) [§15.205](#) & [§15.209](#)

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10360.00	Peak	H	-	-	-98.21	47.23	0.00	56.01	68.20	-12.19
* 15540.00	Average	H	-	-	-111.89	54.98	0.00	50.09	53.98	-3.89
* 15540.00	Peak	H	-	-	-100.53	54.98	0.00	61.45	73.98	-12.53
* 20720.00	Average	H	-	-	-113.86	44.39	-9.54	27.98	53.98	-26.00
* 20720.00	Peak	H	-	-	-101.83	44.39	-9.54	40.01	73.98	-33.97
25900.00	Peak	H	-	-	-99.93	45.11	-9.54	42.64	68.20	-25.56

Table 7-40. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10400.00	Peak	H	-	-	-97.30	47.44	0.00	57.14	68.20	-11.06
* 15600.00	Average	H	-	-	-111.65	55.19	0.00	50.55	53.98	-3.43
* 15600.00	Peak	H	-	-	-100.05	55.19	0.00	62.15	73.98	-11.83
* 20800.00	Average	H	-	-	-113.41	44.39	-9.54	28.44	53.98	-25.54
* 20800.00	Peak	H	-	-	-101.60	44.39	-9.54	40.25	73.98	-33.73
26000.00	Peak	H	-	-	-99.89	45.12	-9.54	42.68	68.20	-25.52

Table 7-41. Radiated Measurements

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 131 of 197



Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10480.00	Peak	H	-	-	-99.40	47.79	0.00	55.39	68.20	-12.81
* 15720.00	Average	H	-	-	-110.47	54.46	0.00	50.99	53.98	-2.99
* 15720.00	Peak	H	-	-	-98.54	54.46	0.00	62.92	73.98	-11.06
* 20960.00	Average	H	-	-	-113.21	44.31	-9.54	28.56	53.98	-25.42
* 20960.00	Peak	H	-	-	-100.48	44.31	-9.54	41.29	73.98	-32.69
26200.00	Peak	H	-	-	-99.38	45.01	-9.54	43.09	68.20	-25.11

Table 7-42. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10520.00	Peak	H	-	-	-99.02	47.85	0.00	55.83	68.20	-12.37
* 15780.00	Average	H	-	-	-111.53	54.20	0.00	49.67	53.98	-4.31
* 15780.00	Peak	H	-	-	-99.66	54.20	0.00	61.54	73.98	-12.44
* 21040.00	Average	H	-	-	-113.17	44.29	-9.54	28.58	53.98	-25.40
* 21040.00	Peak	H	-	-	-99.82	44.29	-9.54	41.93	73.98	-32.05
26300.00	Peak	H	-	-	-98.94	45.00	-9.54	43.51	68.20	-24.69

Table 7-43. Radiated Measurements

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 132 of 197



Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
10560.00	Peak	H	-	-	-99.22	47.79	0.00	55.57	68.20	-12.63
* 15840.00	Average	H	-	-	-111.19	54.40	0.00	50.21	53.98	-3.77
* 15840.00	Peak	H	-	-	-99.94	54.40	0.00	61.46	73.98	-12.52
* 21120.00	Average	H	-	-	-113.25	44.28	-9.54	28.48	53.98	-25.50
* 21120.00	Peak	H	-	-	-100.99	44.28	-9.54	40.74	73.98	-33.24
26400.00	Peak	H	-	-	-99.15	45.02	-9.54	43.33	68.20	-24.87

Table 7-44. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 10640.00	Average	H	-	-	-110.18	47.75	0.00	44.58	53.98	-9.40
* 10640.00	Peak	H	-	-	-98.13	47.75	0.00	56.63	73.98	-17.35
* 15960.00	Average	H	-	-	-111.23	55.02	0.00	50.79	53.98	-3.19
* 15960.00	Peak	H	-	-	-100.02	55.02	0.00	62.00	73.98	-11.98
* 21280.00	Average	H	-	-	-113.24	44.26	-9.54	28.48	53.98	-25.49
* 21280.00	Peak	H	-	-	-100.89	44.26	-9.54	40.83	73.98	-33.14
26600.00	Peak	H	-	-	-102.09	47.61	-9.54	42.97	68.20	-25.23

Table 7-45. Radiated Measurements

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 133 of 197



Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 11000.00	Average	H	-	-	-109.46	48.21	0.00	45.75	53.98	-8.23
* 11000.00	Peak	H	-	-	-97.74	48.21	0.00	57.47	73.98	-16.51
16500.00	Peak	H	-	-	-98.81	55.07	0.00	63.26	68.20	-4.94
22000.00	Peak	H	-	-	-100.53	44.50	-9.54	41.43	68.20	-26.77
27500.00	Peak	H	-	-	-102.09	47.97	-9.54	43.34	68.20	-24.86

Table 7-46. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5600MHz
 Channel: 120

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 11200.00	Average	H	-	-	-110.18	48.06	0.00	44.88	53.98	-9.10
* 11200.00	Peak	H	-	-	-98.47	48.06	0.00	56.59	73.98	-17.39
16800.00	Peak	H	-	-	-99.22	55.67	0.00	63.45	68.20	-4.75
* 22400.00	Average	H	-	-	-113.31	44.57	-9.54	28.72	53.98	-25.26
* 22400.00	Peak	H	-	-	-101.25	44.57	-9.54	40.78	73.98	-33.20
28000.00	Peak	H	-	-	-102.71	48.11	-9.54	42.86	68.20	-25.34

Table 7-47. Radiated Measurements

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 134 of 197

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5720MHz
 Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	
*	11440.00	Average	H	-	-	-110.31	48.92	0.00	45.61	53.98	-8.37
*	11440.00	Peak	H	-	-	-98.15	48.92	0.00	57.77	73.98	-16.21
	17160.00	Peak	H	-	-	-96.91	54.87	0.00	64.96	68.20	-3.24
*	22880.00	Average	H	-	-	-113.34	44.61	-9.54	28.73	53.98	-25.25
*	22880.00	Peak	H	-	-	-101.54	44.61	-9.54	40.53	73.98	-33.45
	28600.00	Peak	H	-	-	-101.86	48.29	-9.54	43.89	68.20	-24.31

Table 7-48. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	
*	11490.00	Average	H	-	-	-110.18	49.06	0.00	45.88	53.98	-8.10
*	11490.00	Peak	H	-	-	-97.80	49.06	0.00	58.26	73.98	-15.72
	17235.00	Peak	H	-	-	-98.81	54.89	0.00	63.08	68.20	-5.12
*	22980.00	Average	H	-	-	-114.19	44.68	-9.54	27.95	53.98	-26.03
*	22980.00	Peak	H	-	-	-100.97	44.68	-9.54	41.17	73.98	-32.81
	28725.00	Peak	H	-	-	-102.47	48.26	-9.54	43.25	68.20	-24.95

Table 7-49. Radiated Measurements

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 135 of 197



Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 11570.00	Average	H	-	-	-110.22	48.97	0.00	45.75	53.98	-8.23
* 11570.00	Peak	H	-	-	-98.46	48.97	0.00	57.51	73.98	-16.47
17355.00	Peak	H	-	-	-98.39	55.38	0.00	63.99	68.20	-4.21
23140.00	Peak	H	-	-	-100.19	44.75	-9.54	42.02	68.20	-26.18
28925.00	Peak	H	-	-	-102.68	48.29	-9.54	43.07	68.20	-25.13

Table 7-50. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
* 11650.00	Average	H	-	-	-110.30	48.92	0.00	45.62	53.98	-8.36
* 11650.00	Peak	H	-	-	-98.48	48.92	0.00	57.44	73.98	-16.54
17475.00	Peak	H	-	-	-99.25	56.15	0.00	63.90	68.20	-4.30
23300.00	Peak	H	-	-	-100.52	44.75	-9.54	41.69	68.20	-26.51
29125.00	Peak	H	-	-	-101.13	48.28	-9.54	44.61	68.20	-23.59

Table 7-51. Radiated Measurements

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 136 of 197



7.7.3 Antenna-1 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters


Operating Frequency: 5180MHz

Channel: 36

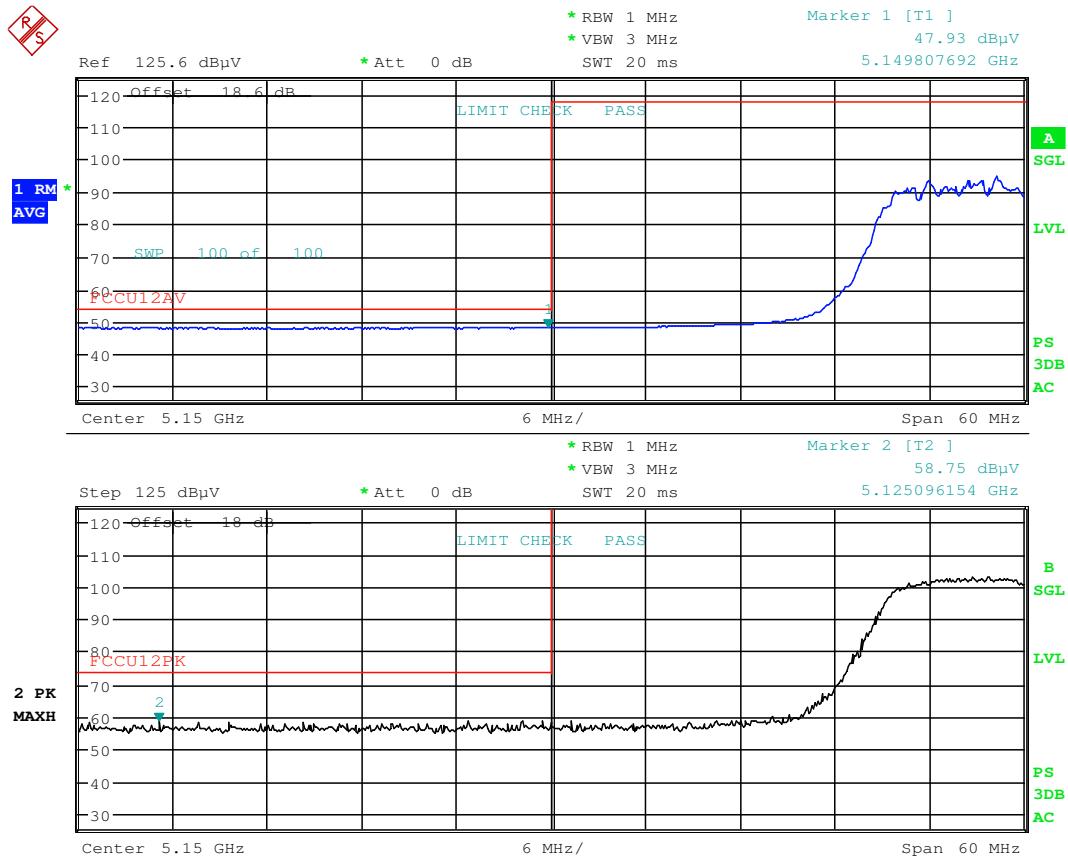

Date: 20.MAR.2016 22:04:05

Plot 7-177. Radiated Restricted Lower Band Edge Plot (UNII Band 1)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 137 of 197

Antenna-1 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz

Channel: 64

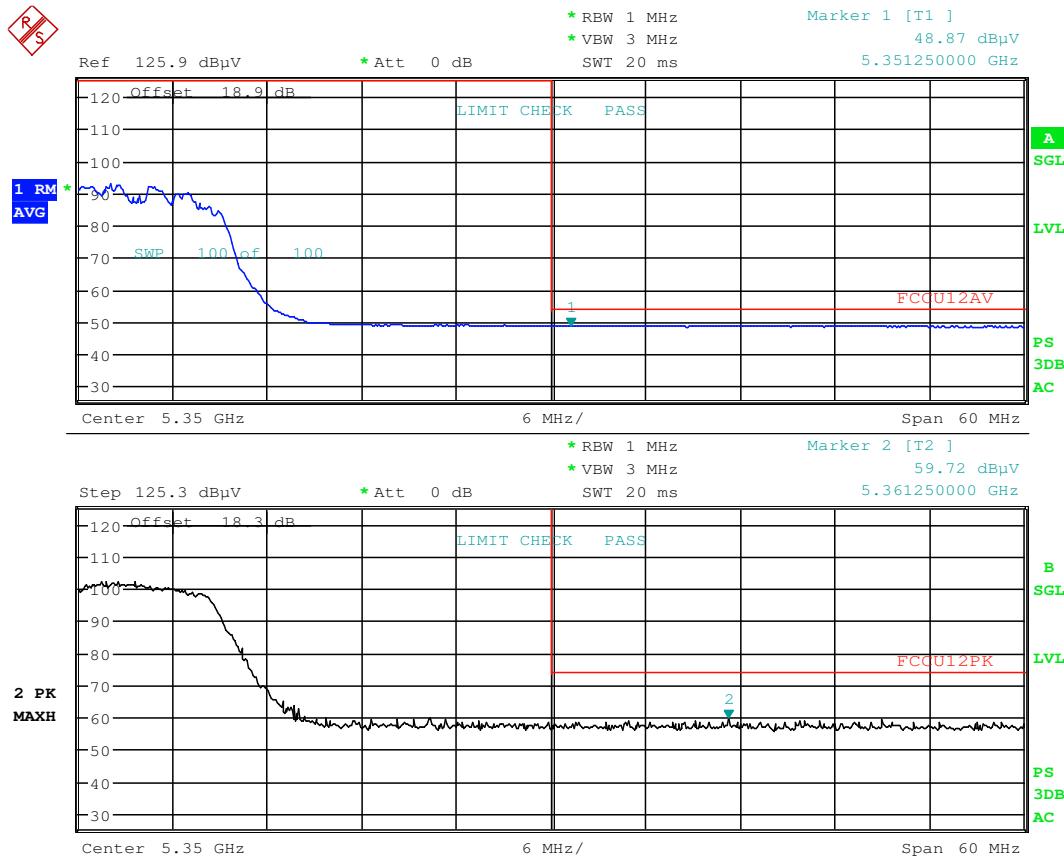

Date: 20.MAR.2016 22:19:45


Plot 7-178. Radiated Restricted Upper Band Edge Plot (UNII Band 2A)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 138 of 197

Antenna-1 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

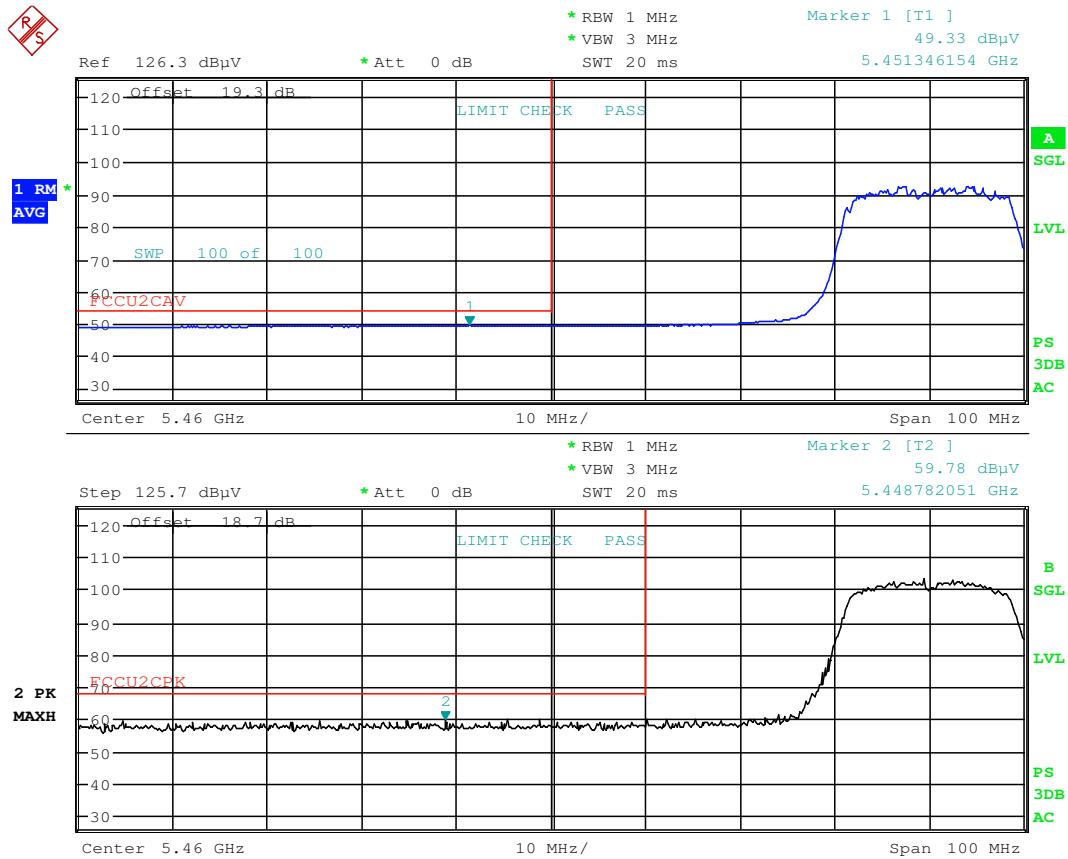

Date: 20.MAR.2016 22:27:25


Plot 7-179. Radiated Restricted Lower Band Edge Plot (UNII Band 2C)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 139 of 197

Antenna-1 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

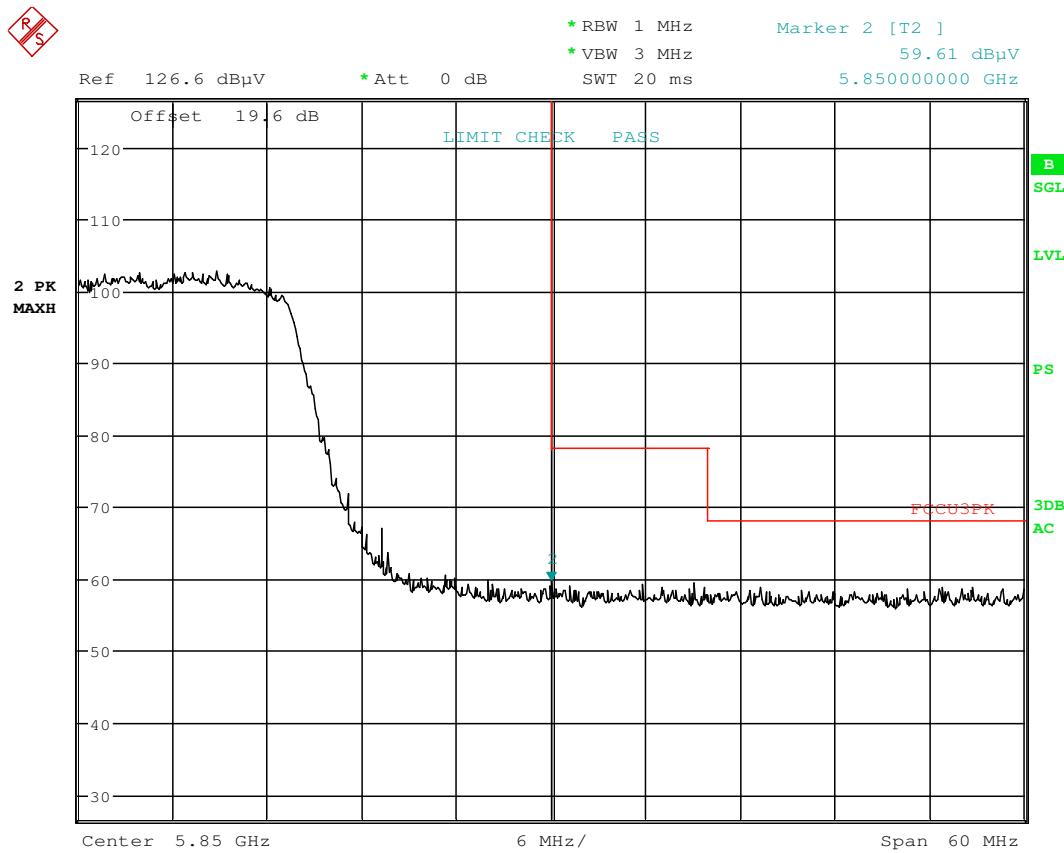

Date: 20.MAR.2016 22:32:48

Plot 7-180. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 140 of 197

7.7.4 Antenna-1 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5190MHz

Channel: 38

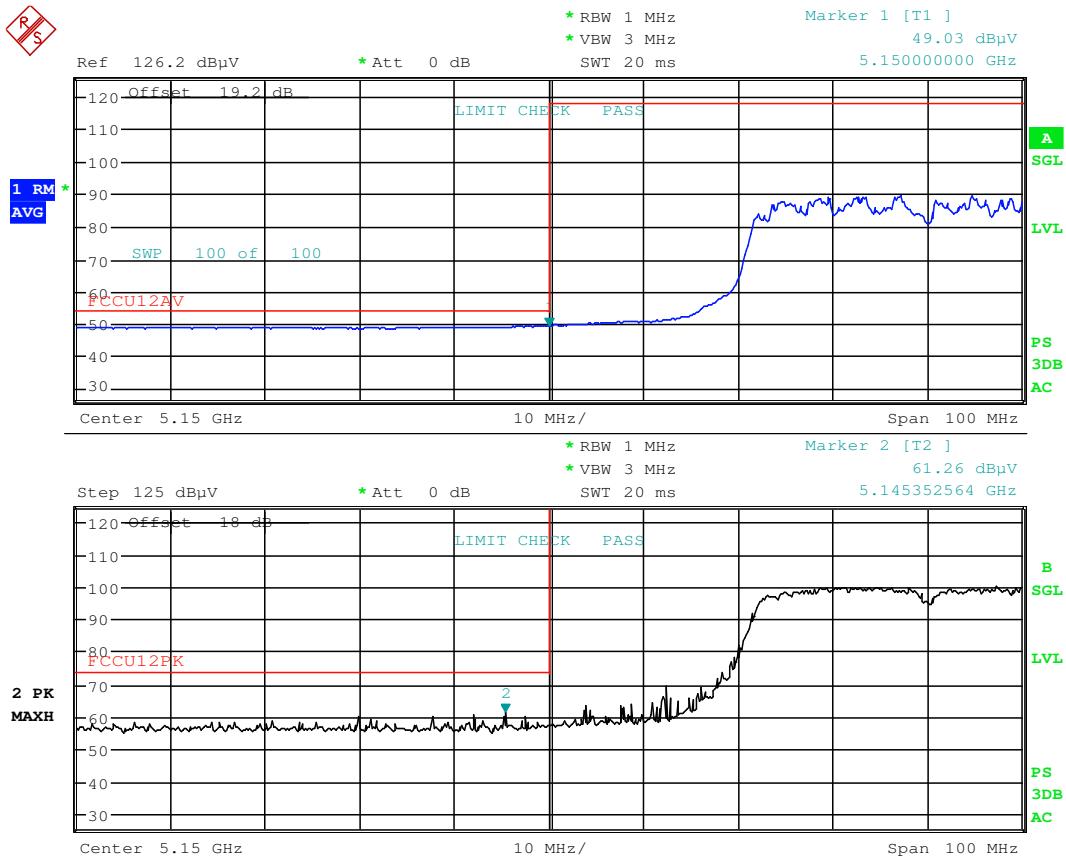

Date: 20.MAR.2016 22:05:51

Plot 7-181. Radiated Restricted Lower Band Edge Plot (UNII Band 1)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 141 of 197

Antenna-1 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5310MHz

Channel: 62

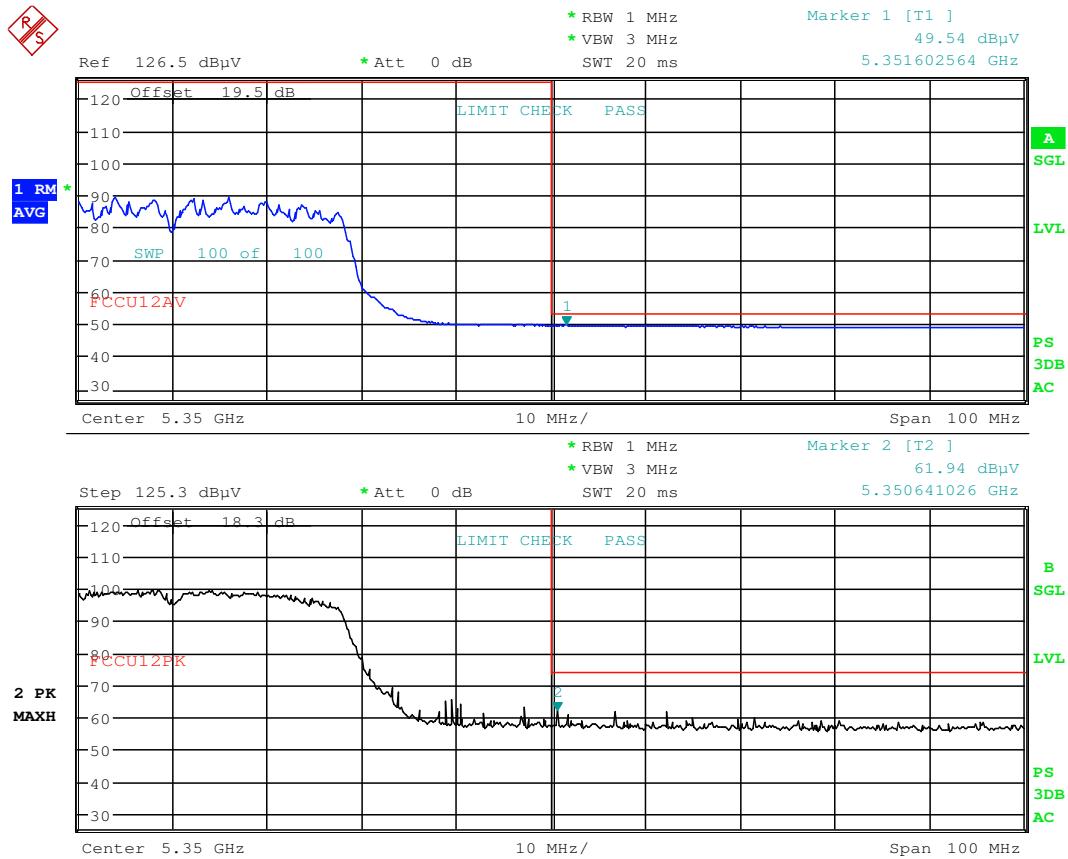

Date: 20.MAR.2016 22:20:31

Plot 7-182. Radiated Restricted Upper Band Edge Plot (UNII Band 2A)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 142 of 197



Antenna-1 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5510MHz

Channel: 102

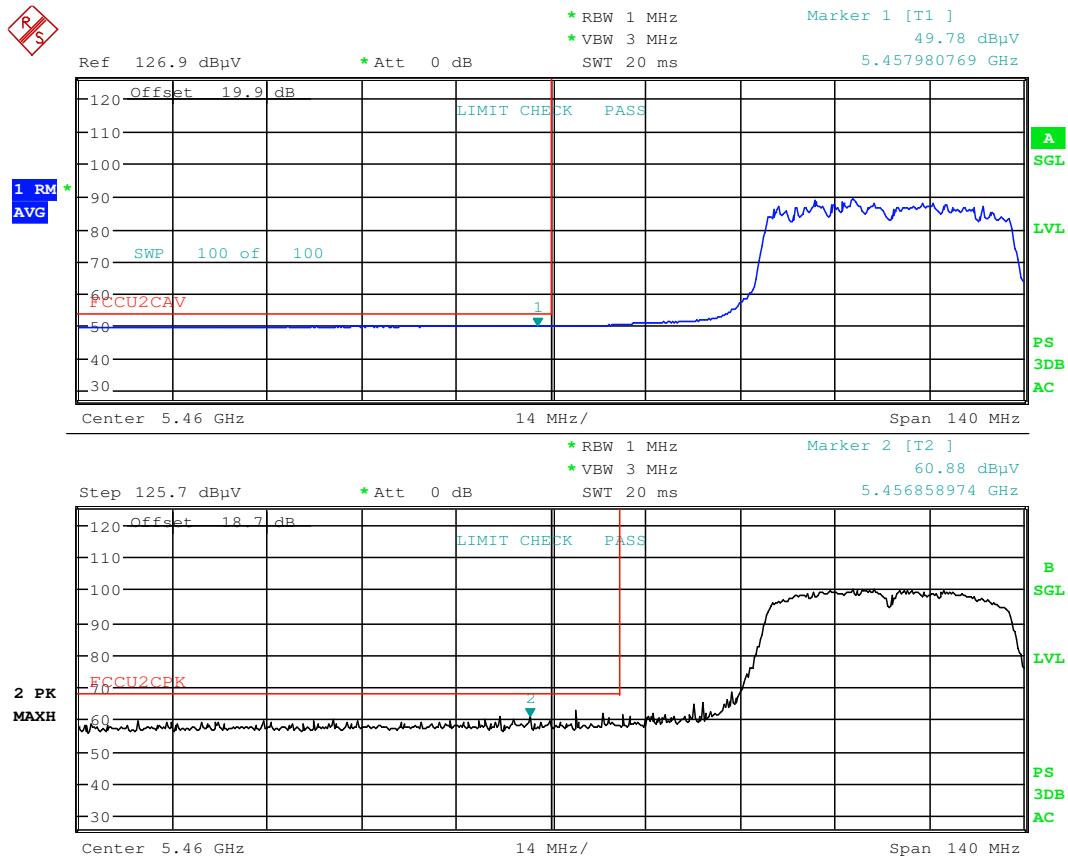

Date: 20.MAR.2016 22:28:25


Plot 7-183. Radiated Restricted Lower Band Edge Plot (UNII Band 2C)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 143 of 197

Antenna-1 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

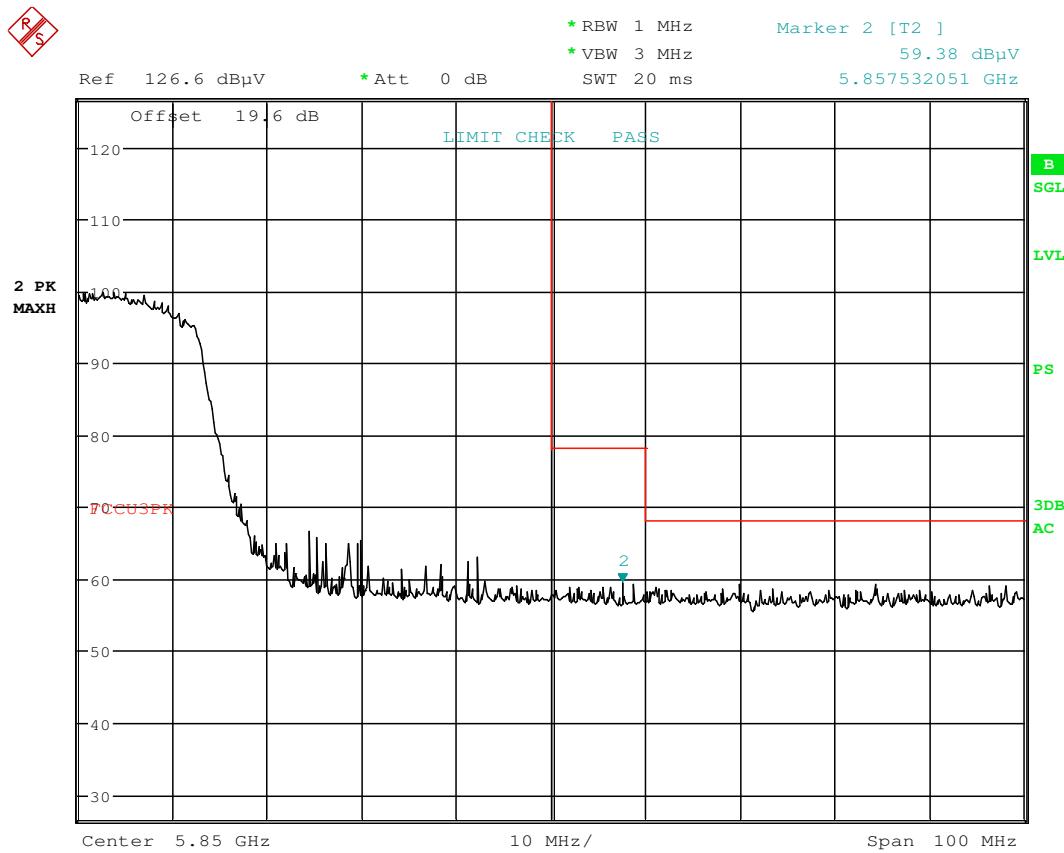

Date: 20.MAR.2016 22:34:49

Plot 7-184. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 144 of 197

7.7.5 Antenna-1 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5210MHz

Channel: 42

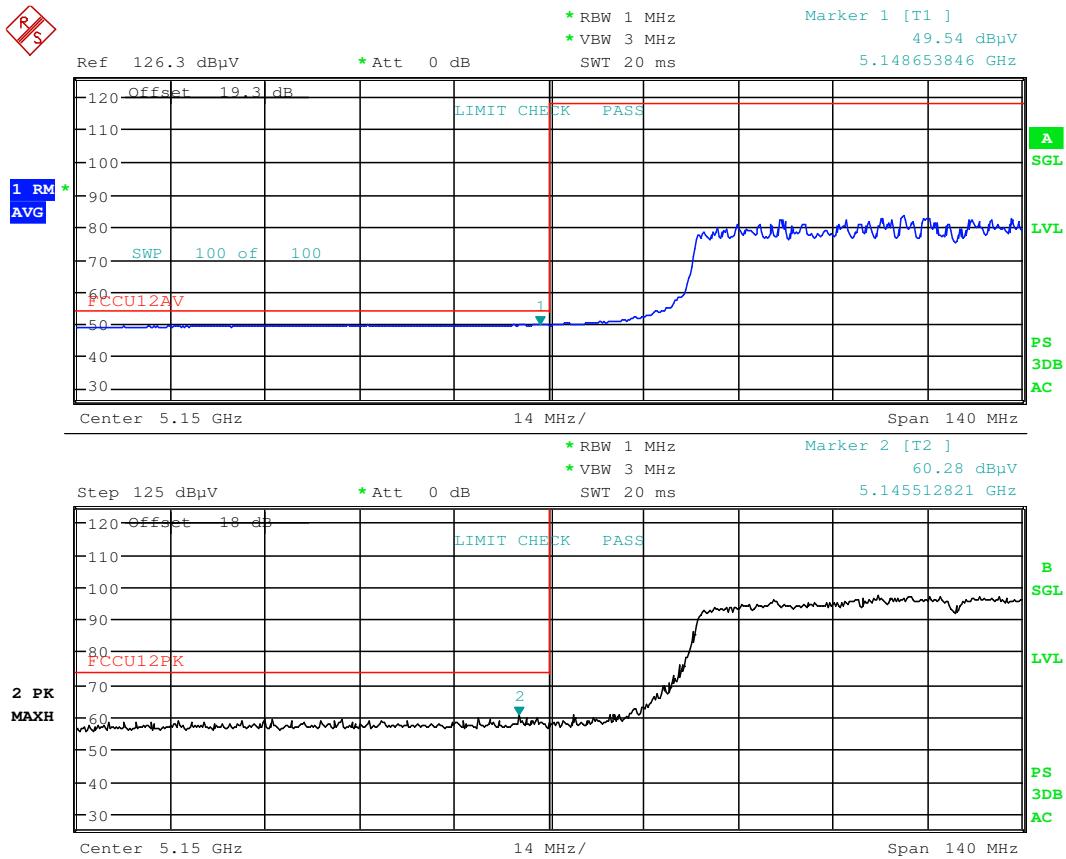

Date: 20.MAR.2016 22:09:30

Plot 7-185. Radiated Restricted Lower Band Edge Plot (UNII Band 1)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 145 of 197

Antenna-1 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5290MHz

Channel: 58

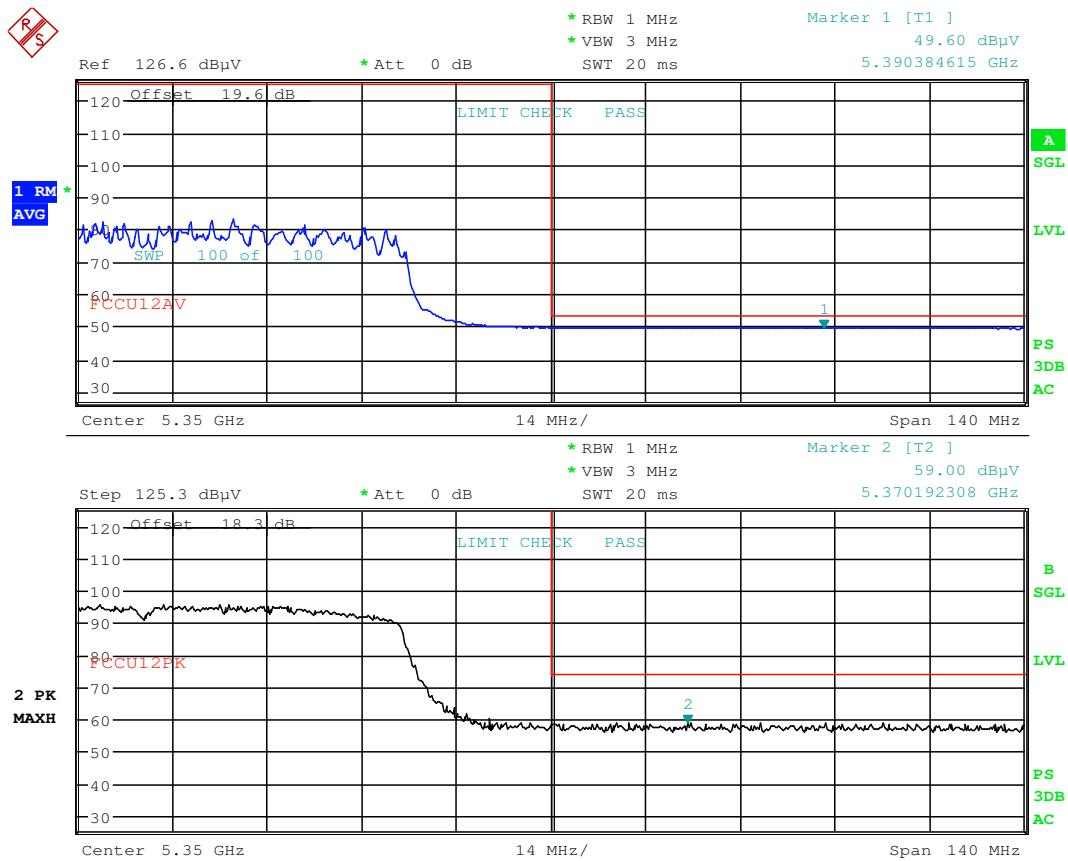

Date: 20.MAR.2016 22:21:25

Plot 7-186. Radiated Restricted Upper Band Edge Plot (UNII Band 2A)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 146 of 197



Antenna-1 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5530MHz

Channel: 106

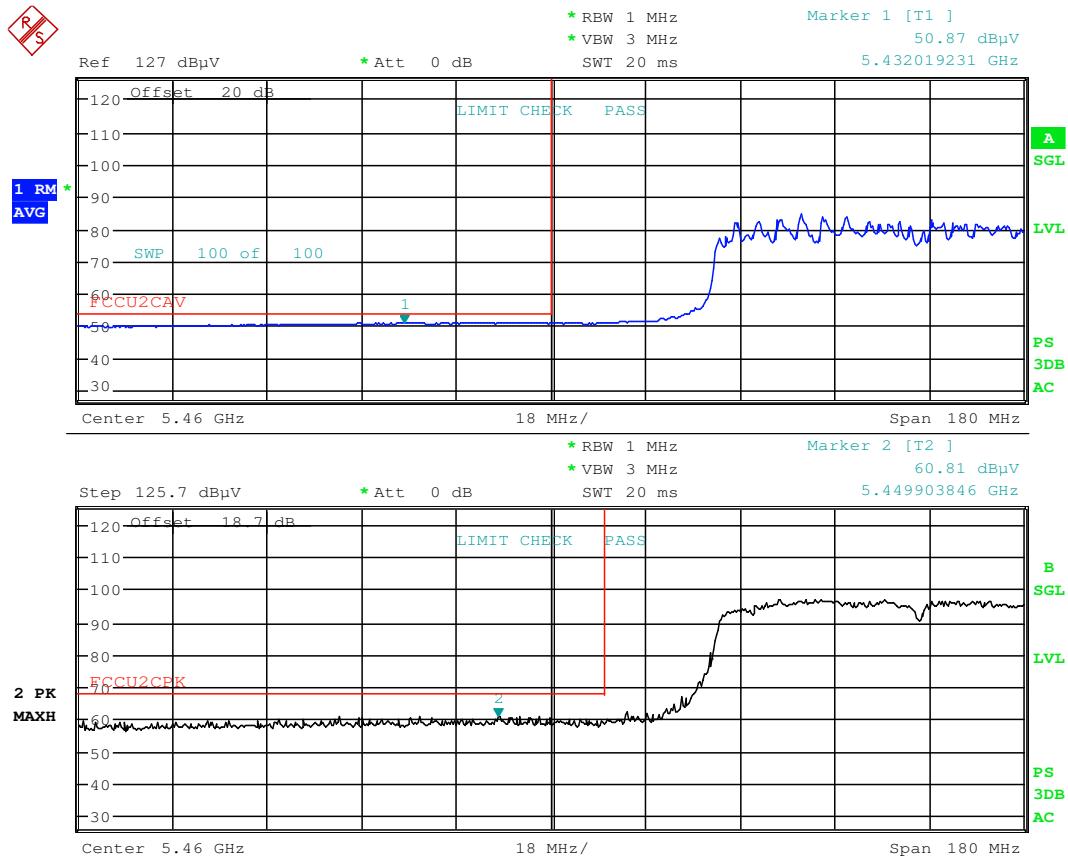

Date: 20.MAR.2016 22:29:10

Plot 7-187. Radiated Restricted Lower Band Edge Plot (UNII Band 2C)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 147 of 197

Antenna-1 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5775MHz

Channel: 155

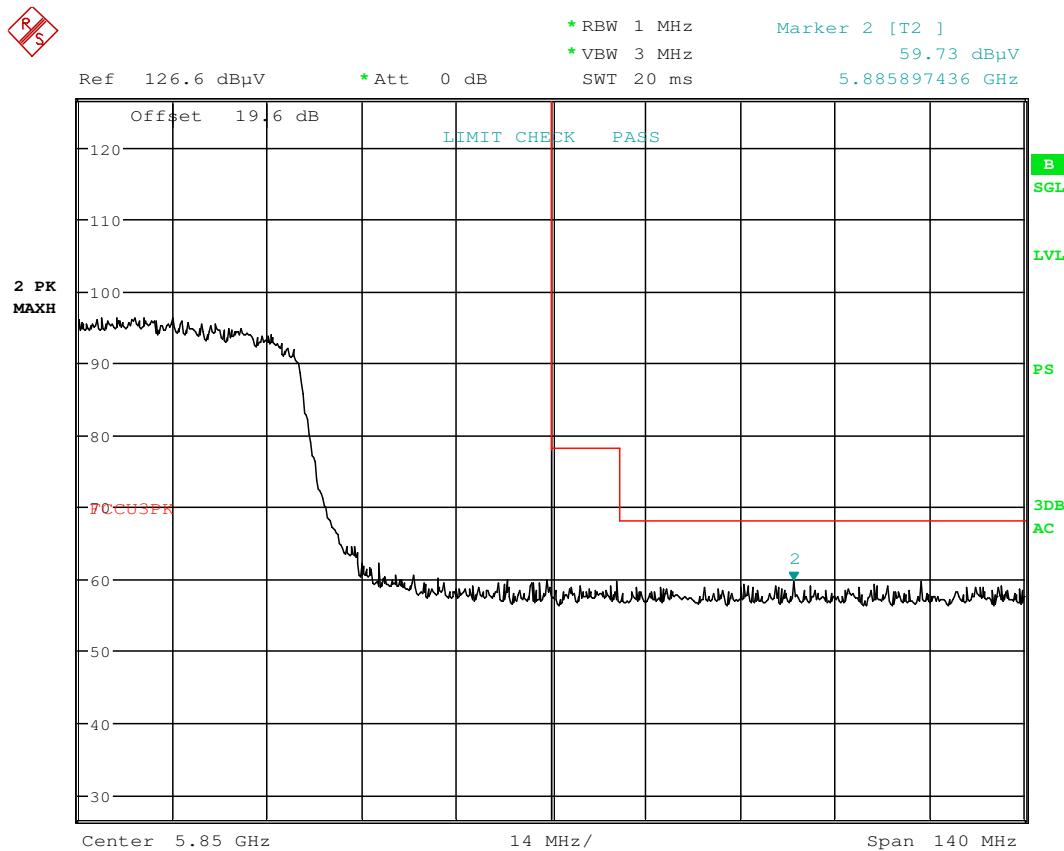

Date: 20.MAR.2016 22:35:31

Plot 7-188. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 148 of 197

7.7.6 Antenna-2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz

Channel: 36

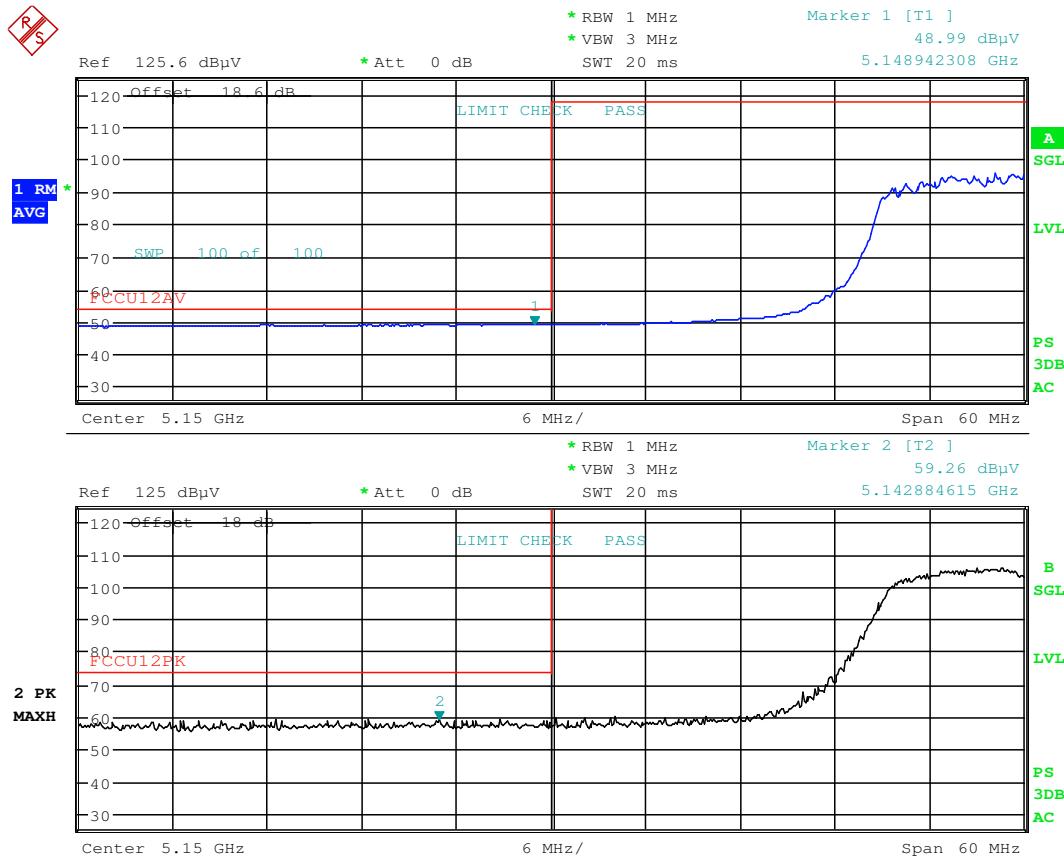

Date: 20.MAR.2016 23:15:52

Plot 7-189. Radiated Restricted Lower Band Edge Plot (UNII Band 1)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 149 of 197

Antenna-2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz

Channel: 64

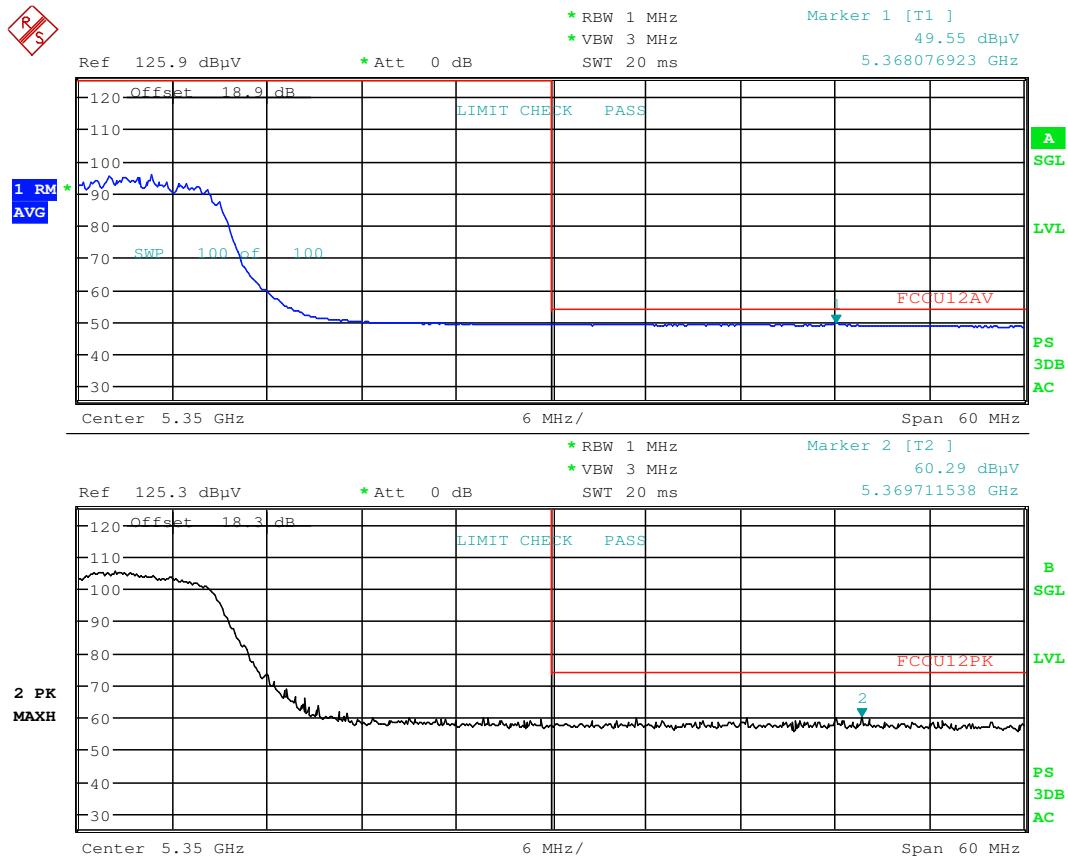

Date: 20.MAR.2016 23:35:45


Plot 7-190. Radiated Restricted Upper Band Edge Plot (UNII Band 2A)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 150 of 197

Antenna-2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

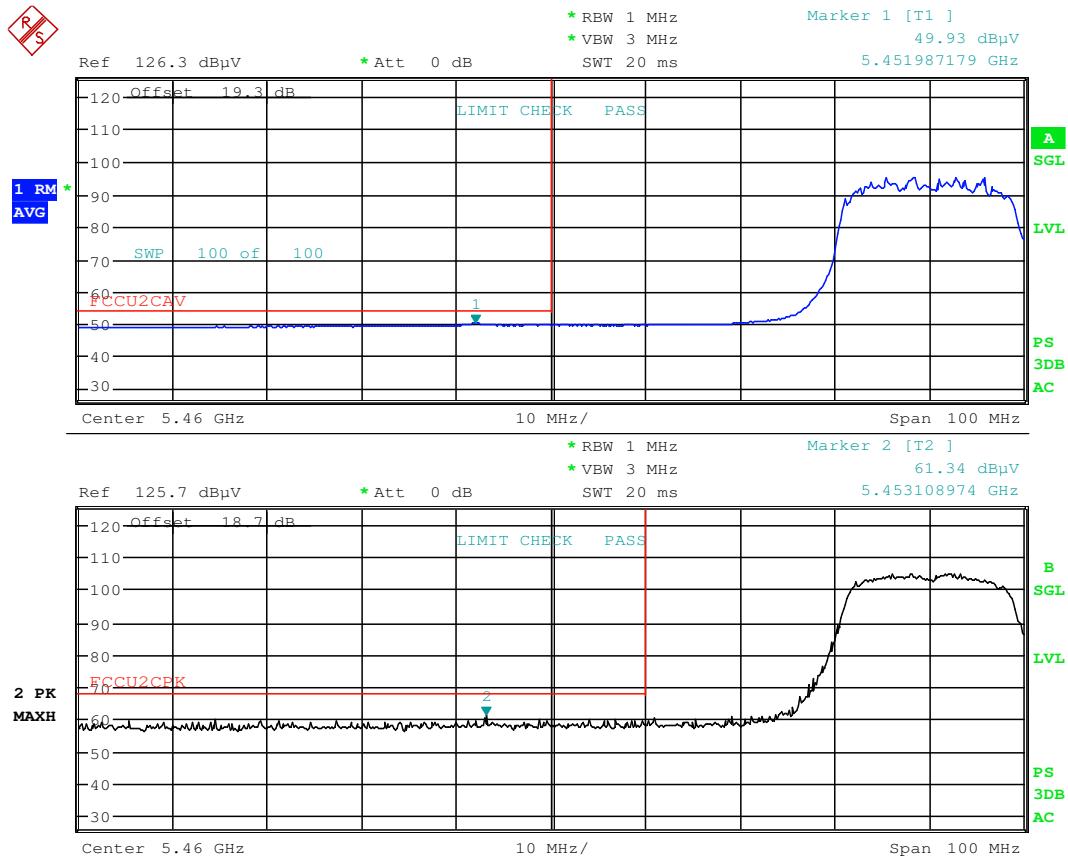

Date: 20.MAR.2016 23:43:28

Plot 7-191. Radiated Restricted Lower Band Edge Plot (UNII Band 2C)


FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 151 of 197



Antenna-2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode:	802.11a
Worst Case Transfer Rate:	6 Mbps
Distance of Measurements:	3 Meters
Operating Frequency:	5825MHz
Channel:	165

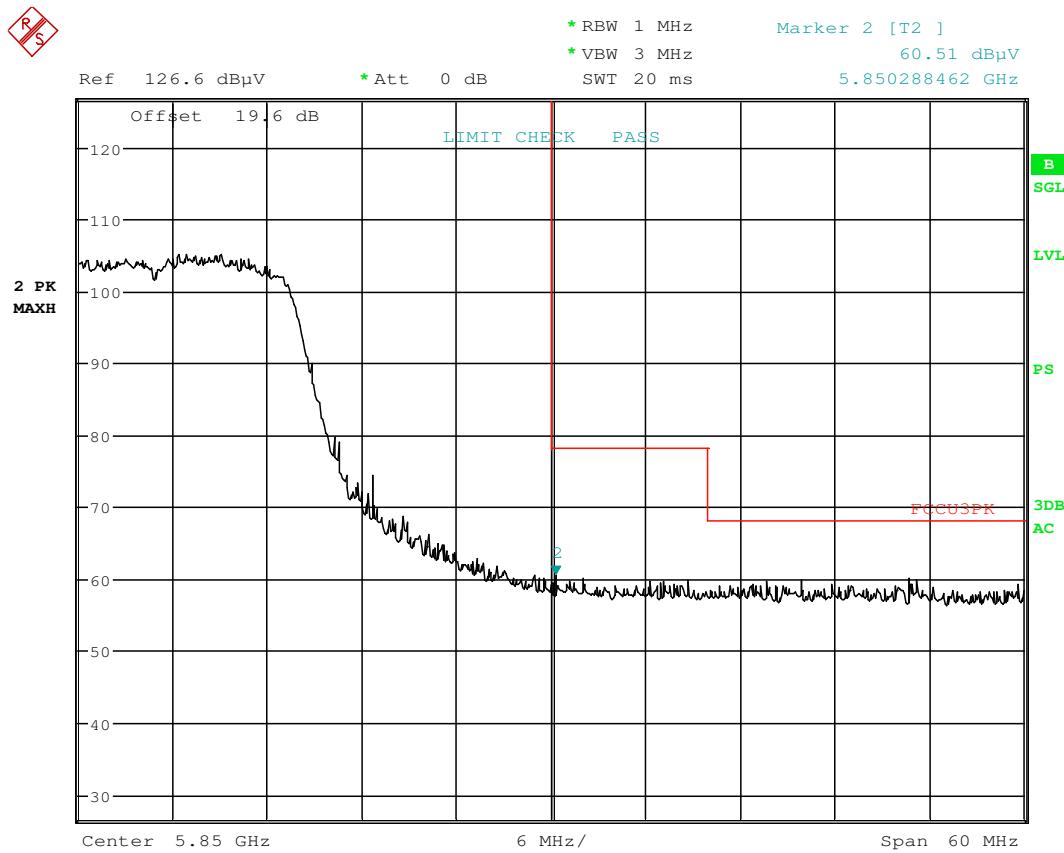

Date: 20.MAR.2016 23:53:20

Plot 7-192. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 152 of 197

7.7.7 Antenna-2 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5190MHz

Channel: 38

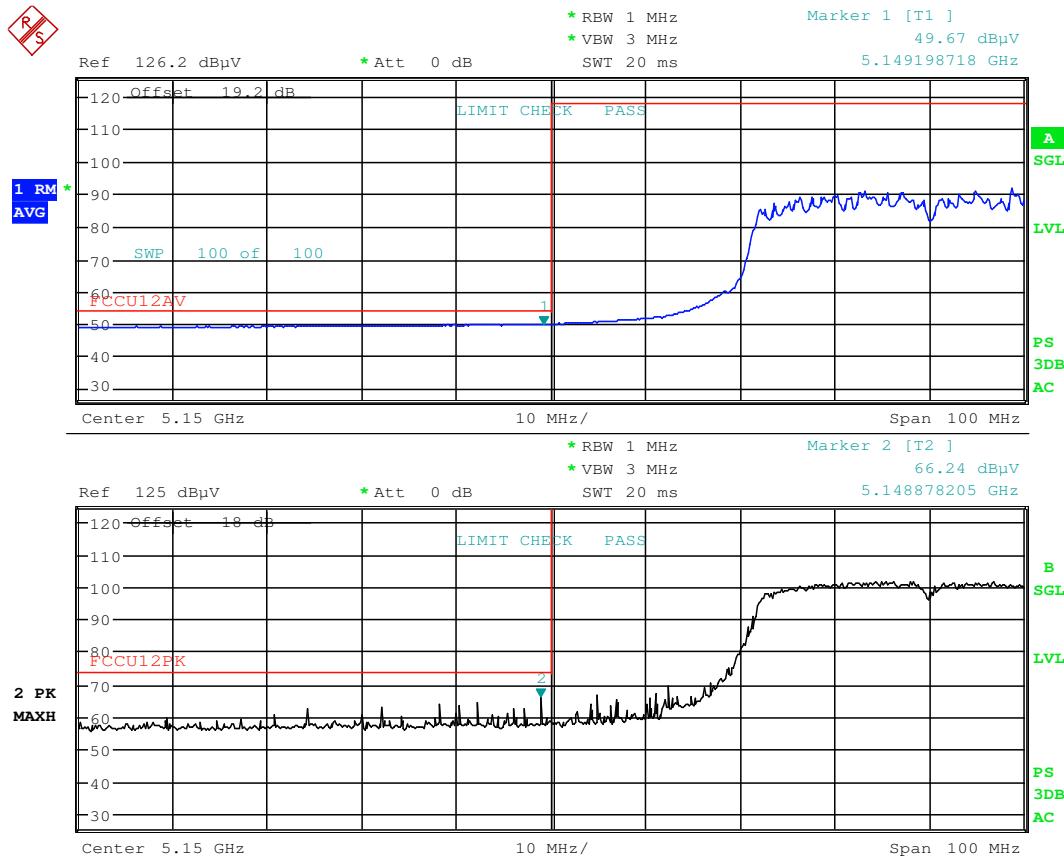

Date: 20.MAR.2016 23:30:46

Plot 7-193. Radiated Restricted Lower Band Edge Plot (UNII Band 1)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 153 of 197

Antenna-2 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5310MHz

Channel: 62

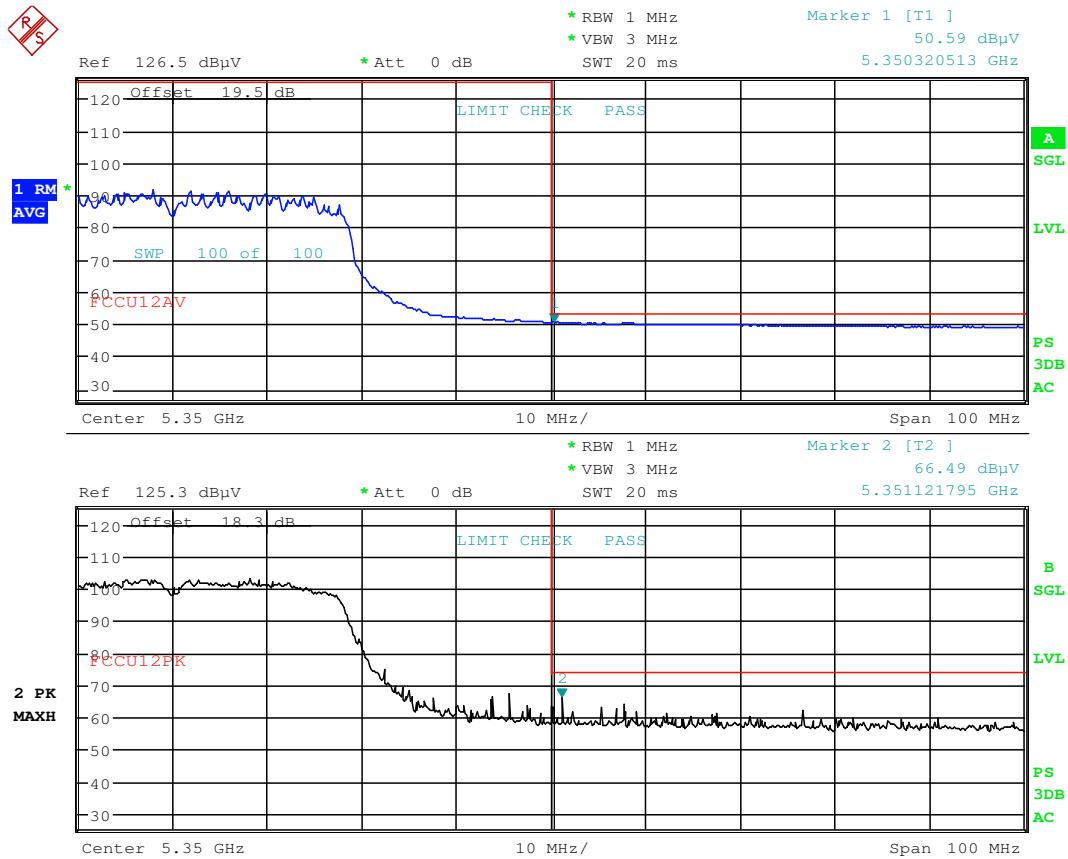

Date: 20.MAR.2016 23:36:37

Plot 7-194. Radiated Restricted Upper Band Edge Plot (UNII Band 2A)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 154 of 197



Antenna-2 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5510MHz

Channel: 102

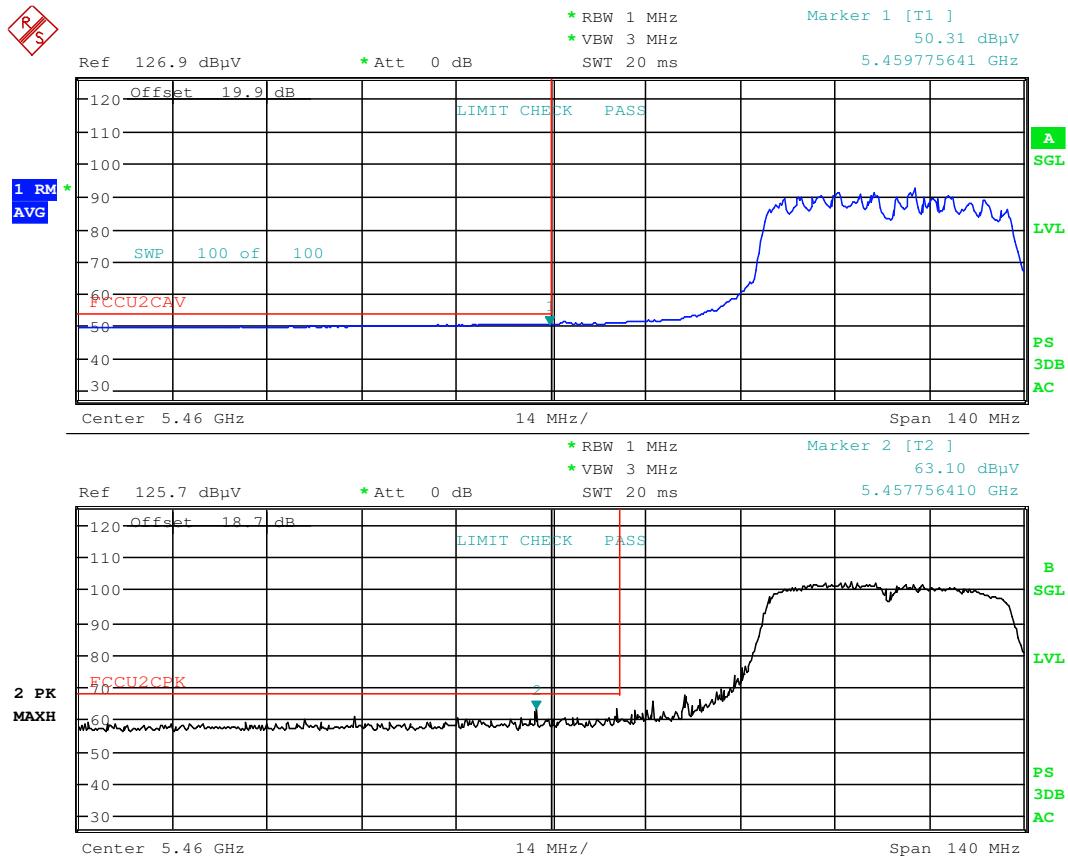

Date: 20.MAR.2016 23:48:18

Plot 7-195. Radiated Restricted Lower Band Edge Plot (UNII Band 2C)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 155 of 197

Antenna-2 Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5795MHz

Channel: 159

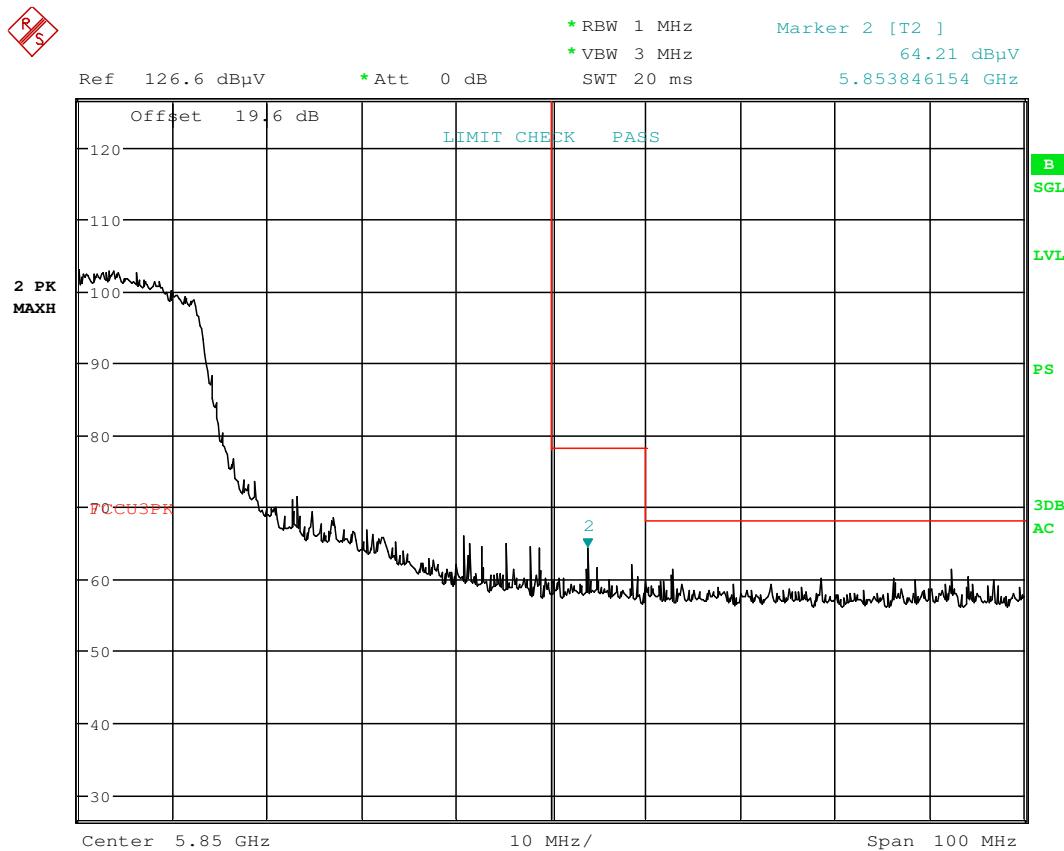

Date: 20.MAR.2016 23:54:21

Plot 7-196. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 156 of 197

7.7.8 Antenna-2 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5210MHz

Channel: 42

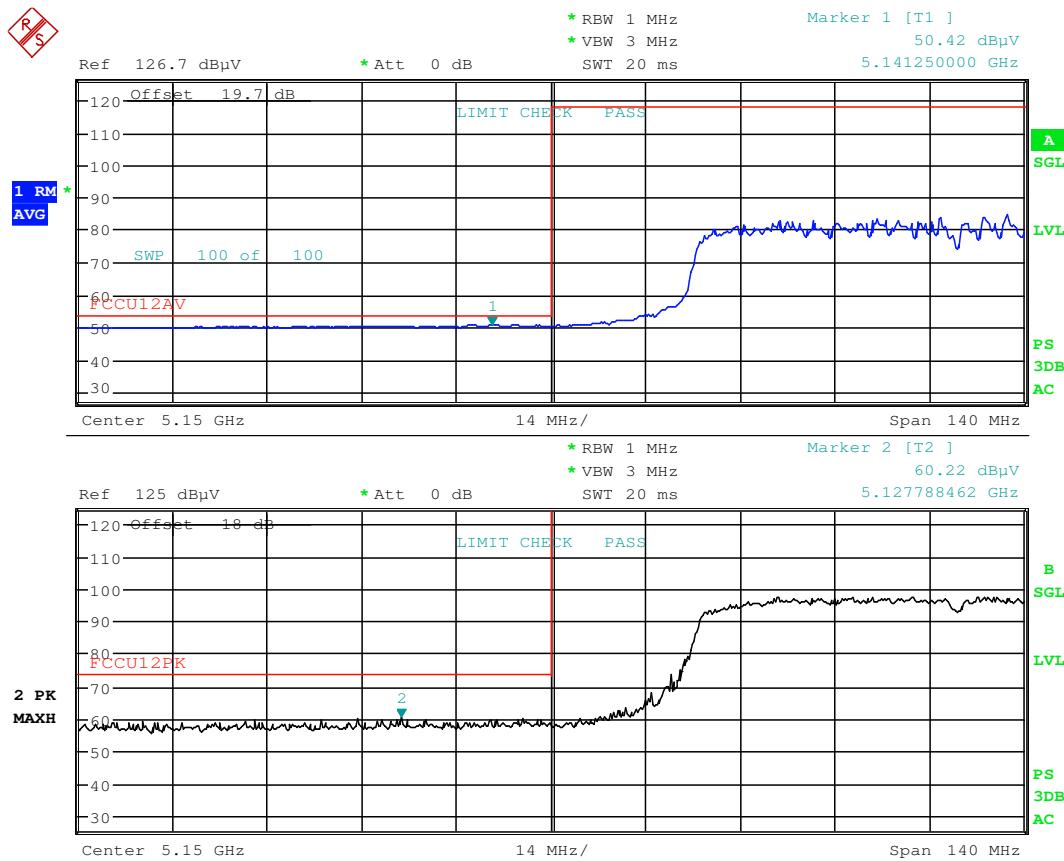

Date: 20.MAR.2016 23:31:42

Plot 7-197. Radiated Restricted Lower Band Edge Plot (UNII Band 1)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 157 of 197

Antenna-2 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5290MHz

Channel: 58

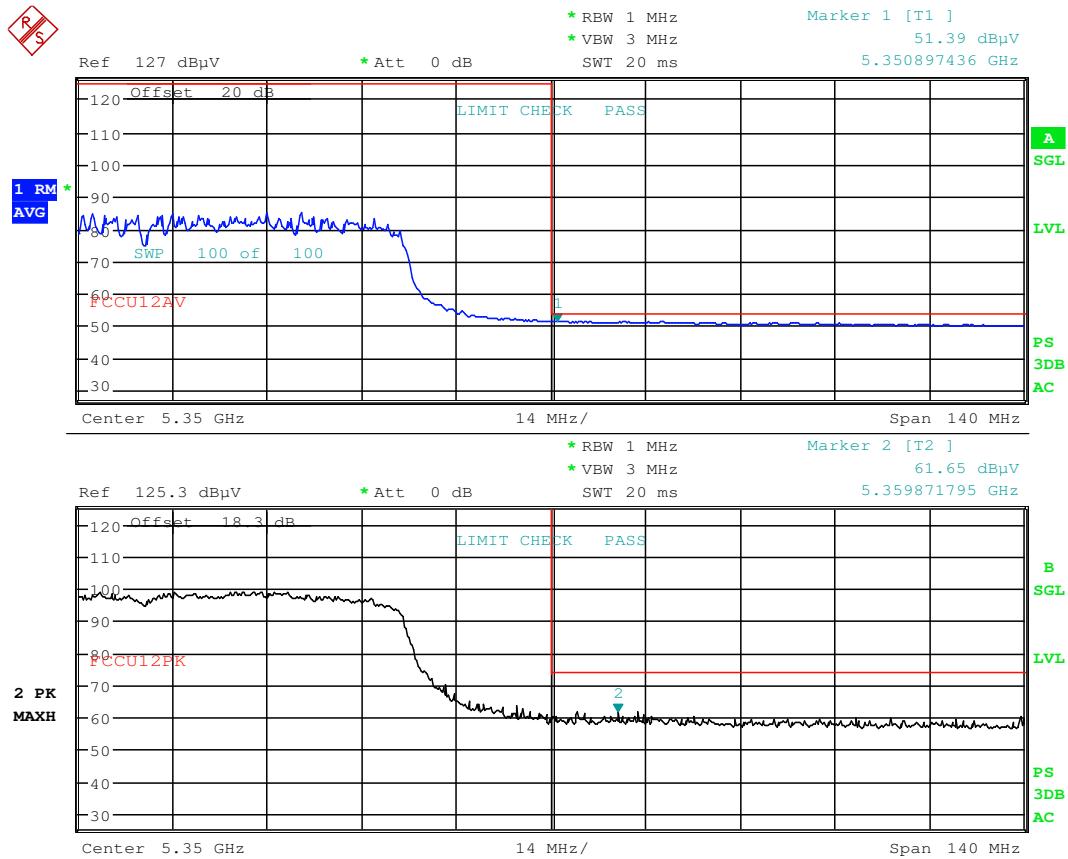

Date: 20.MAR.2016 23:38:50

Plot 7-198. Radiated Restricted Upper Band Edge Plot (UNII Band 2A)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 158 of 197

Antenna-2 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5530MHz

Channel: 106

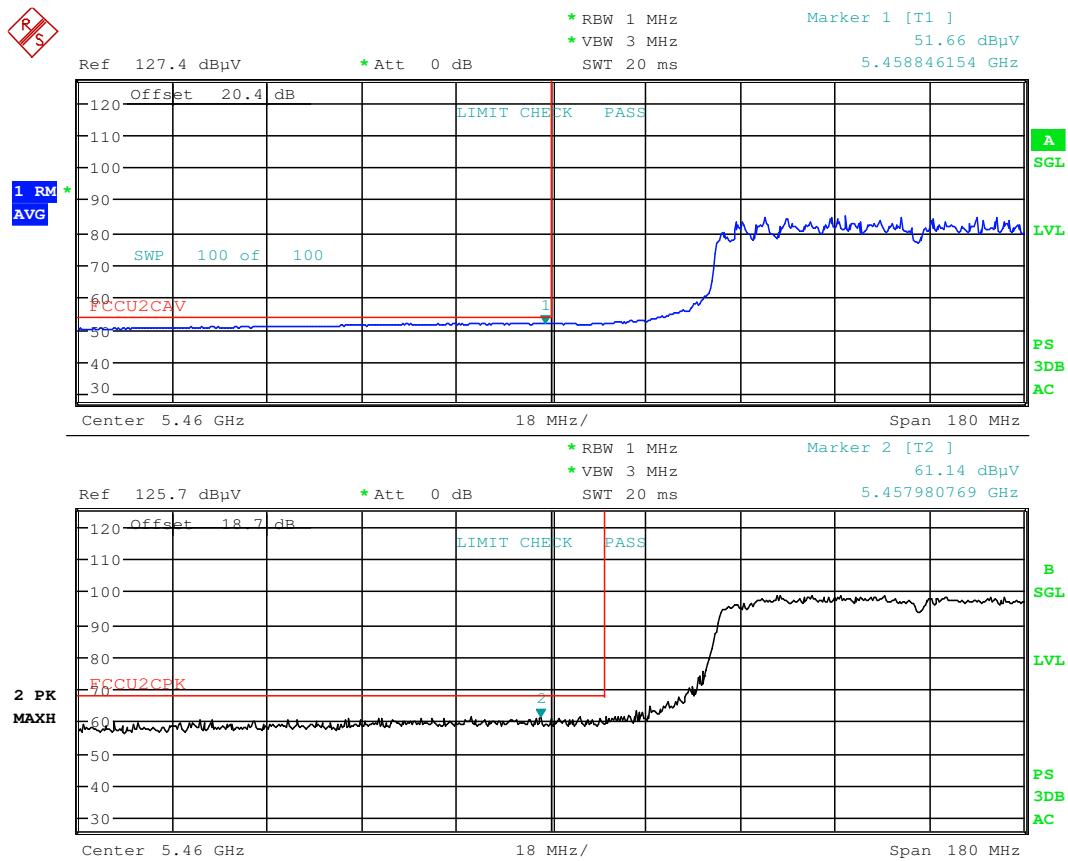

Date: 20.MAR.2016 23:49:05

Plot 7-199. Radiated Restricted Lower Band Edge Plot (UNII Band 2C)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 159 of 197

Antenna-2 Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5775MHz

Channel: 155

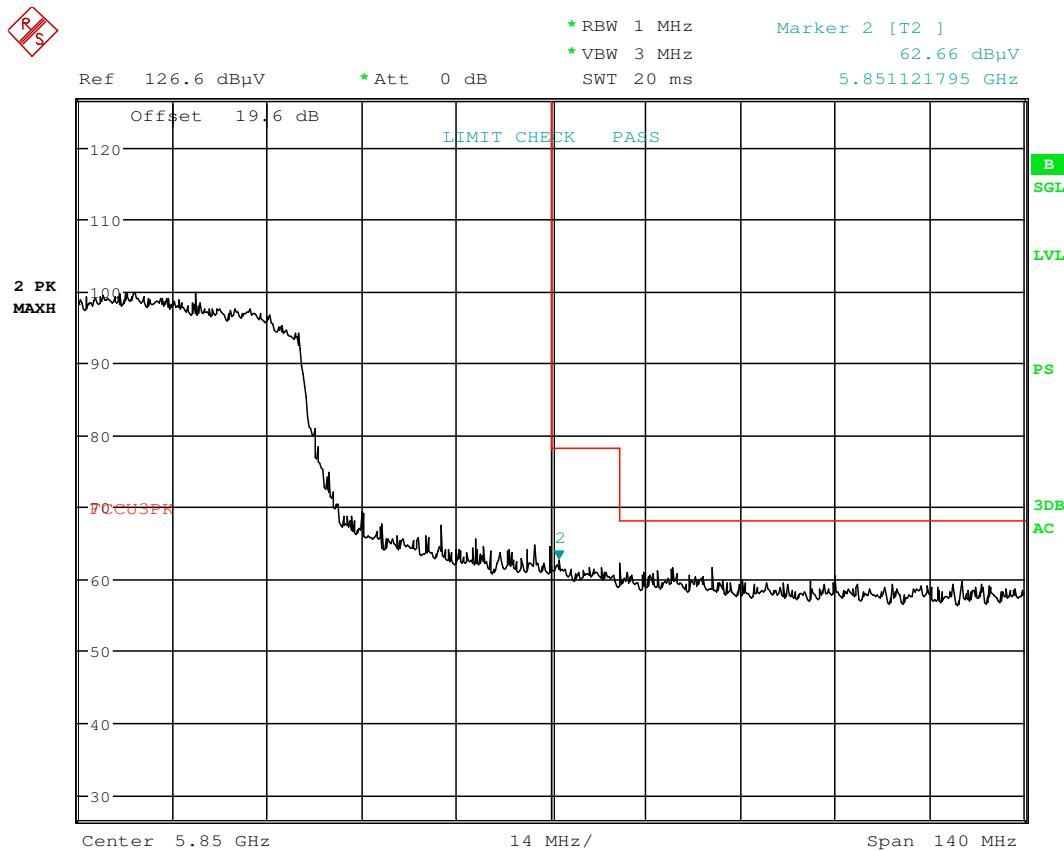

Date: 20.MAR.2016 23:54:59


Plot 7-200. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 160 of 197

7.7.9 MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

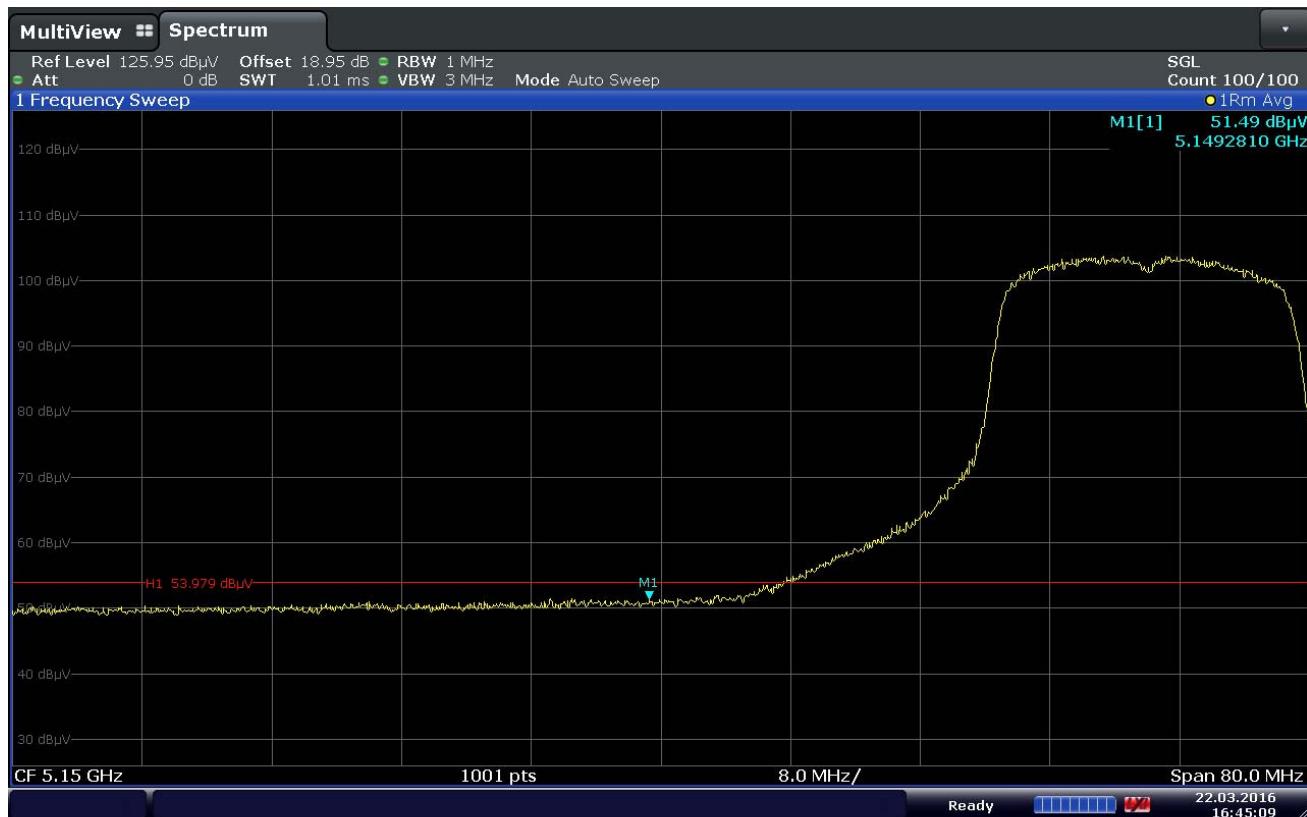


Plot 7-201. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 161 of 197

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

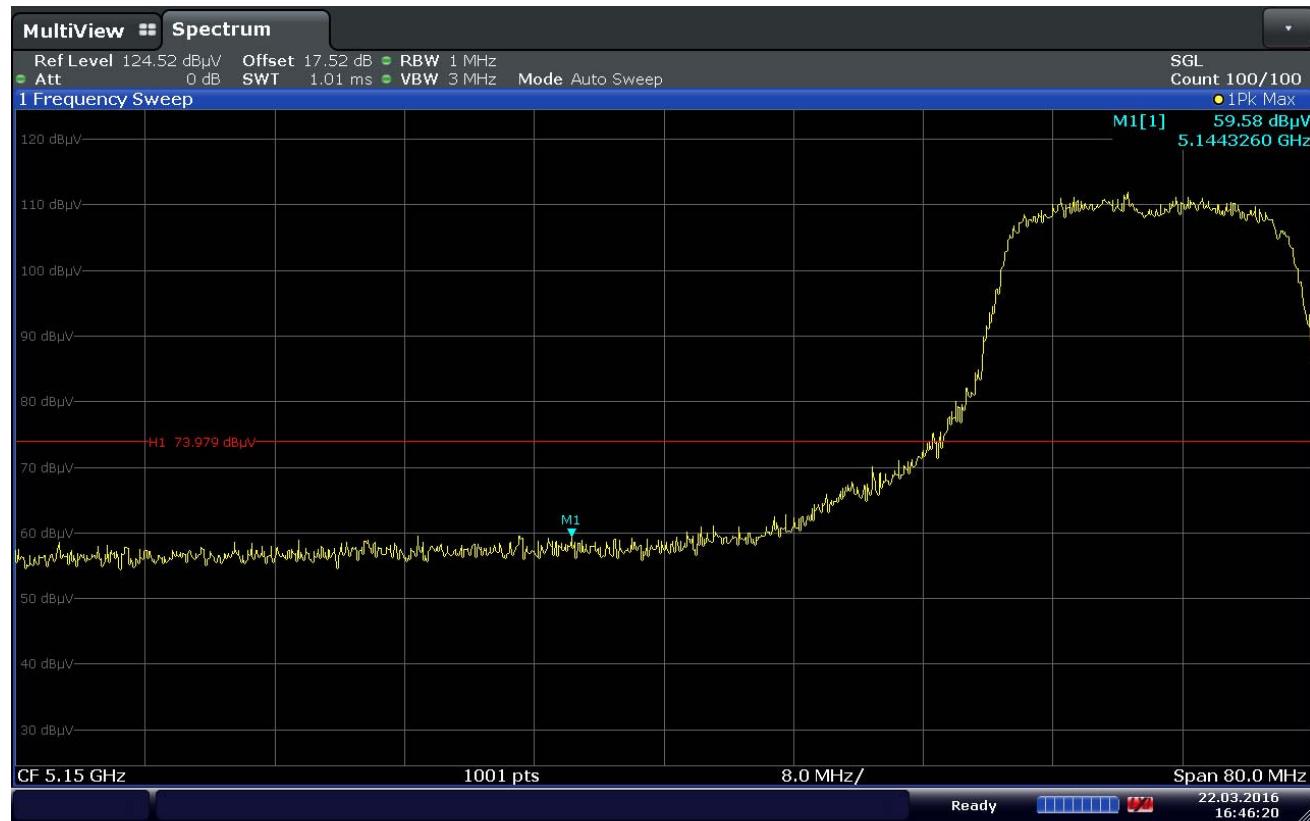


Plot 7-202. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 162 of 197

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

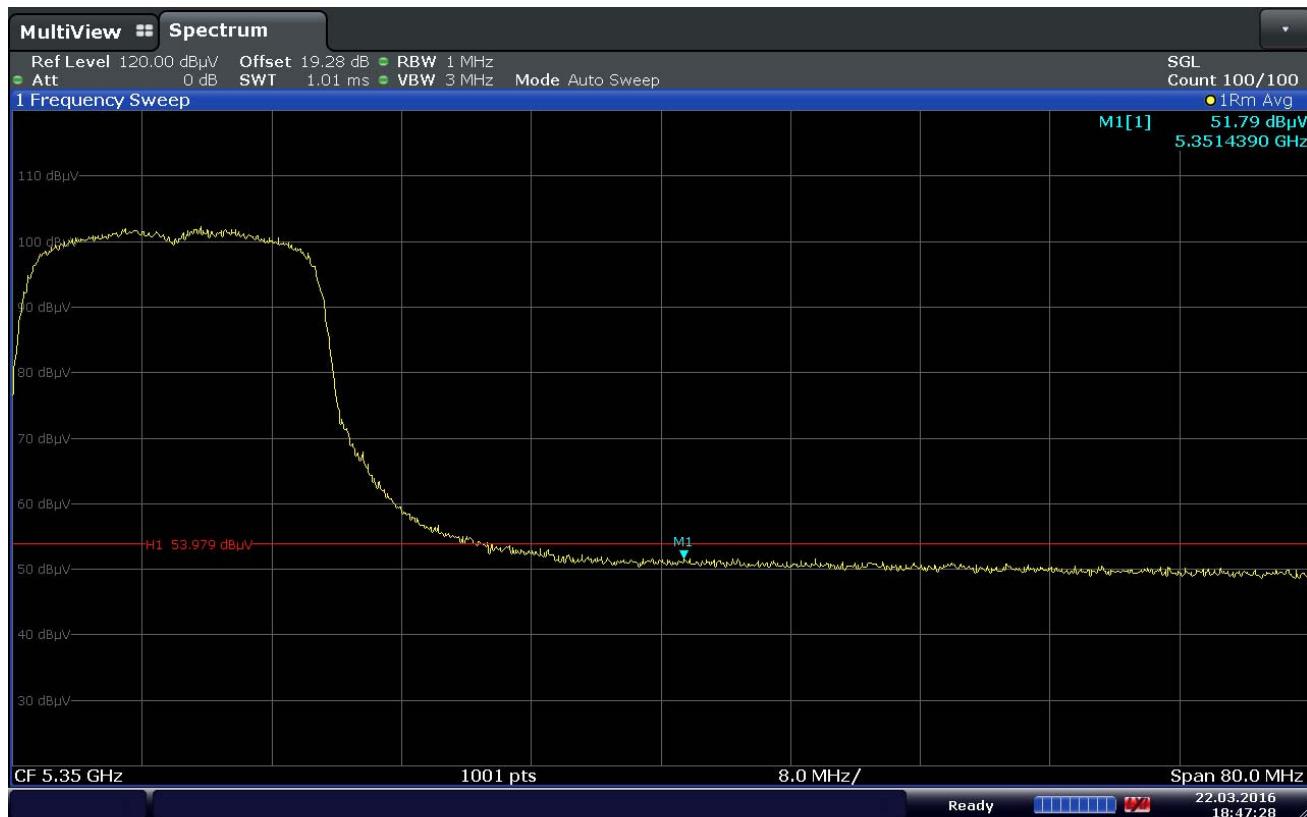


Plot 7-203. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 163 of 197

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

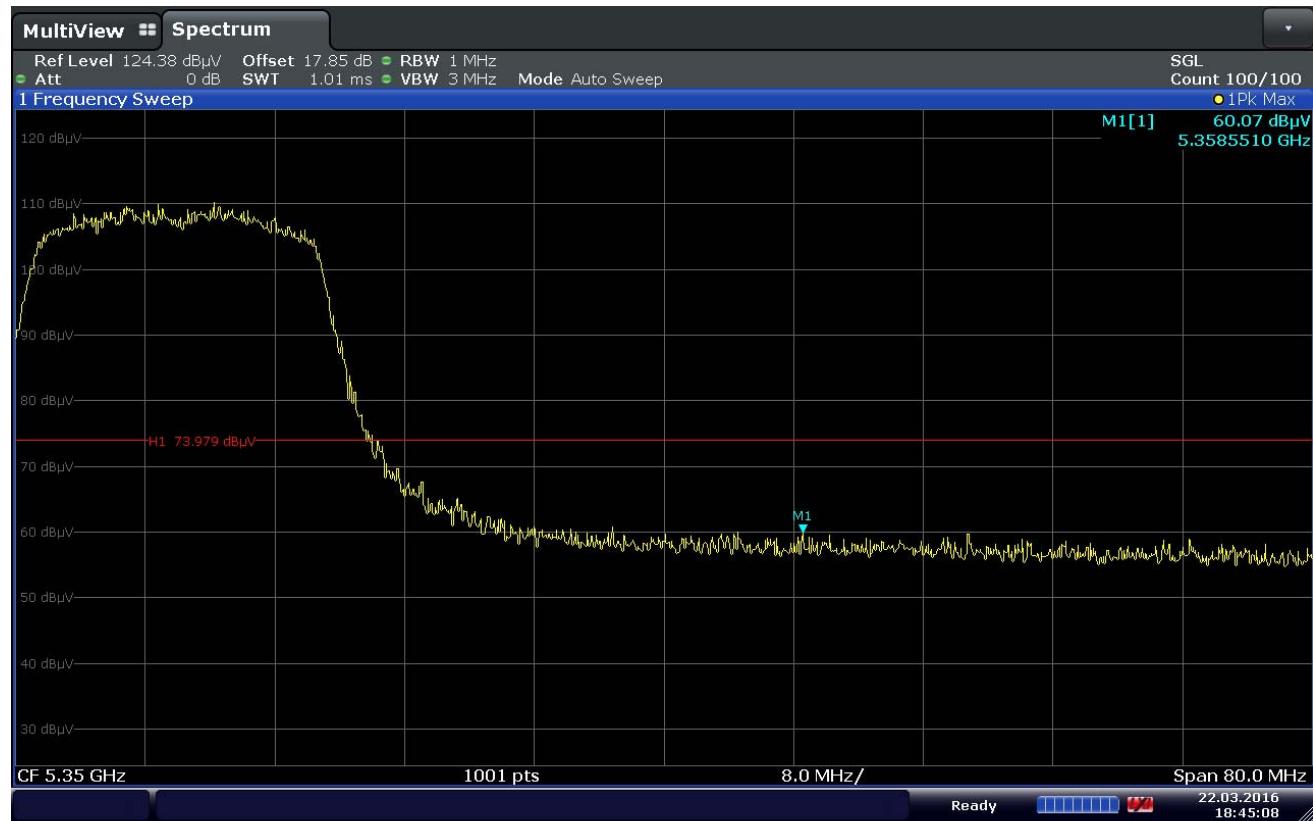


Plot 7-204. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 164 of 197

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

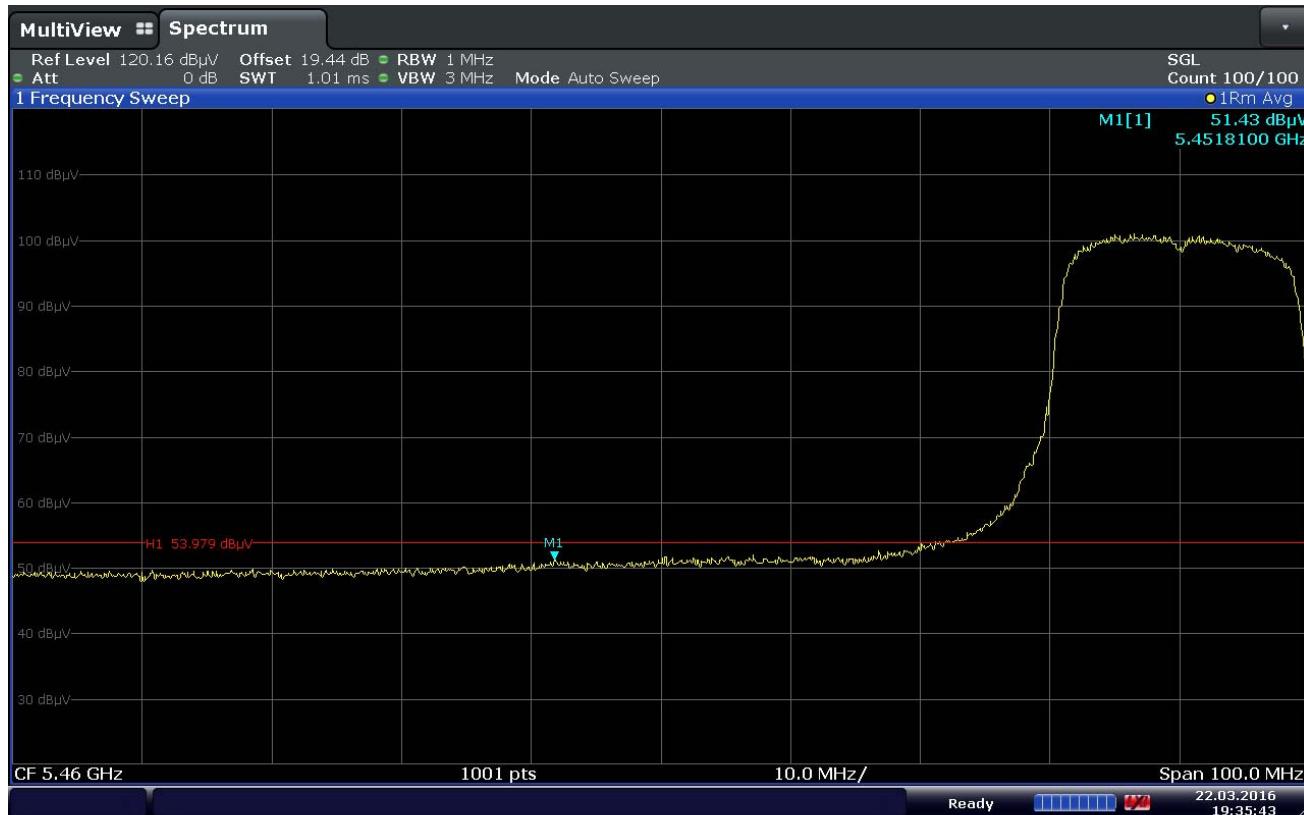


Plot 7-205. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 165 of 197

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

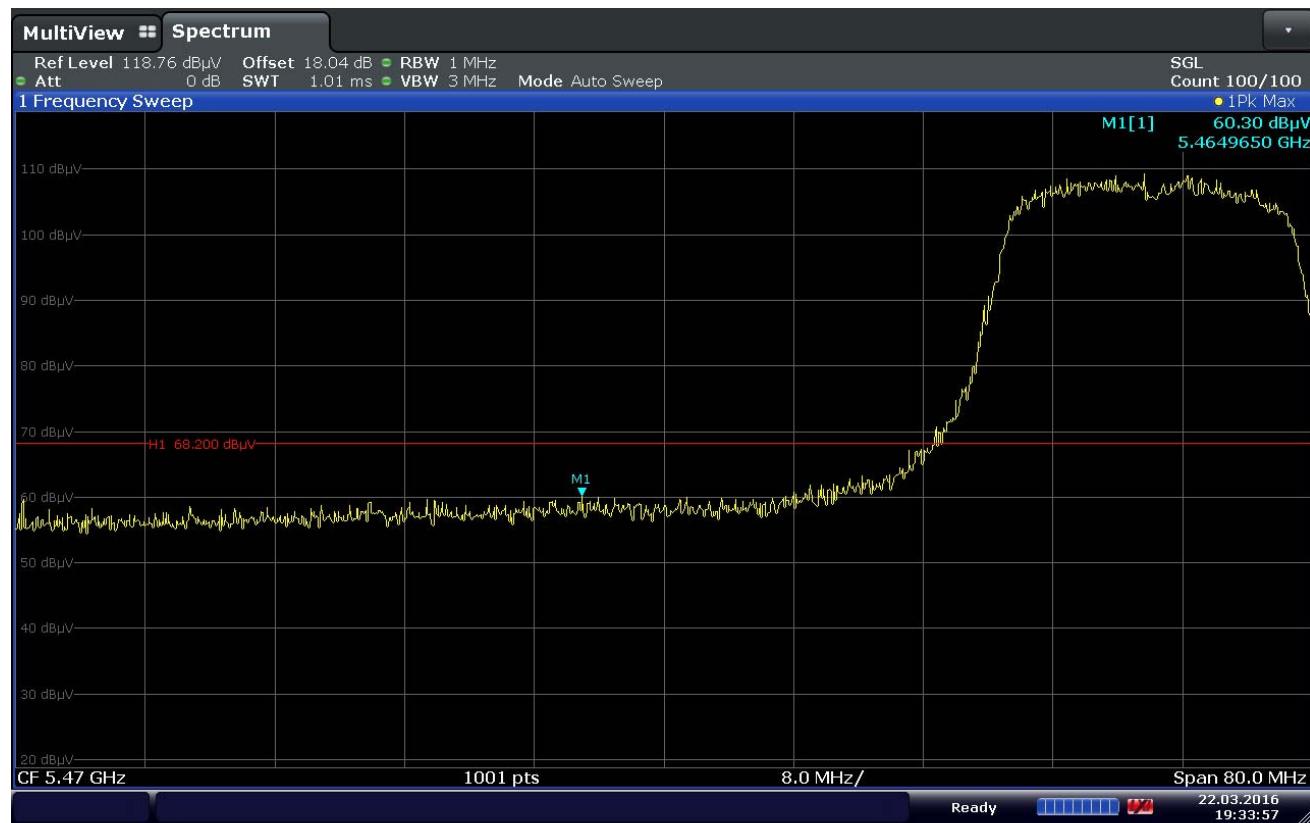


Plot 7-206. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 166 of 197

MIMO Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (20MHz)
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

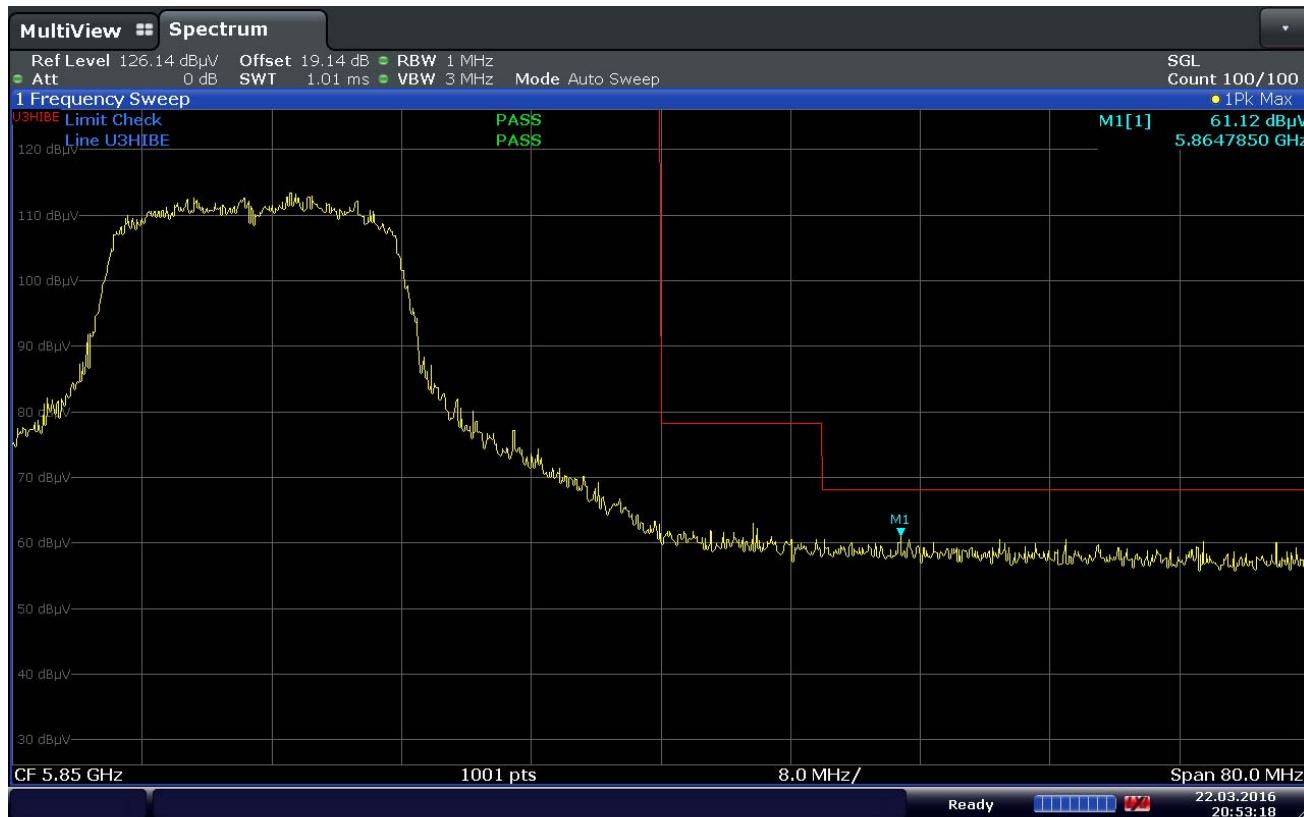

Plot 7-207. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 167 of 197

7.7.10 MIMO Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5190MHz

Channel: 38

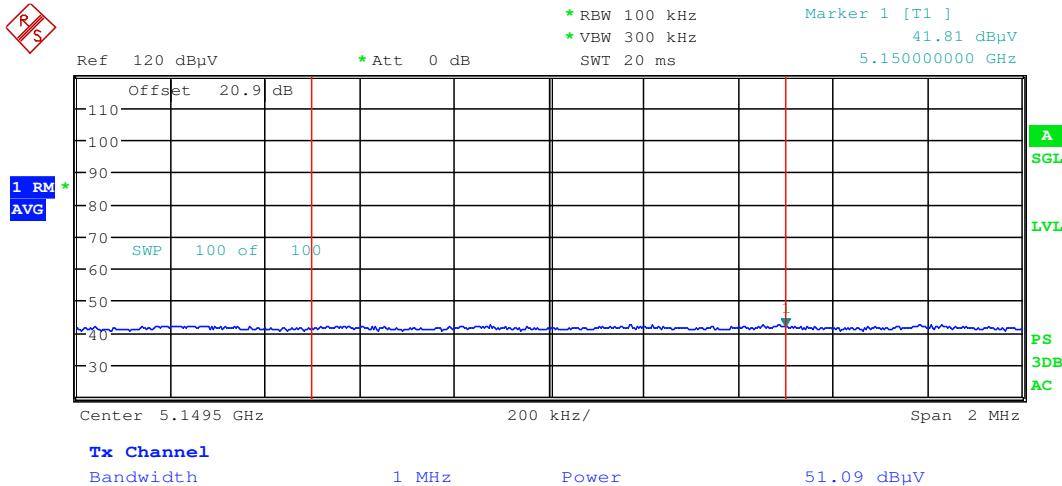


Date: 23.MAR.2016 16:52:46

Plot 7-208. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 168 of 197

MIMO Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

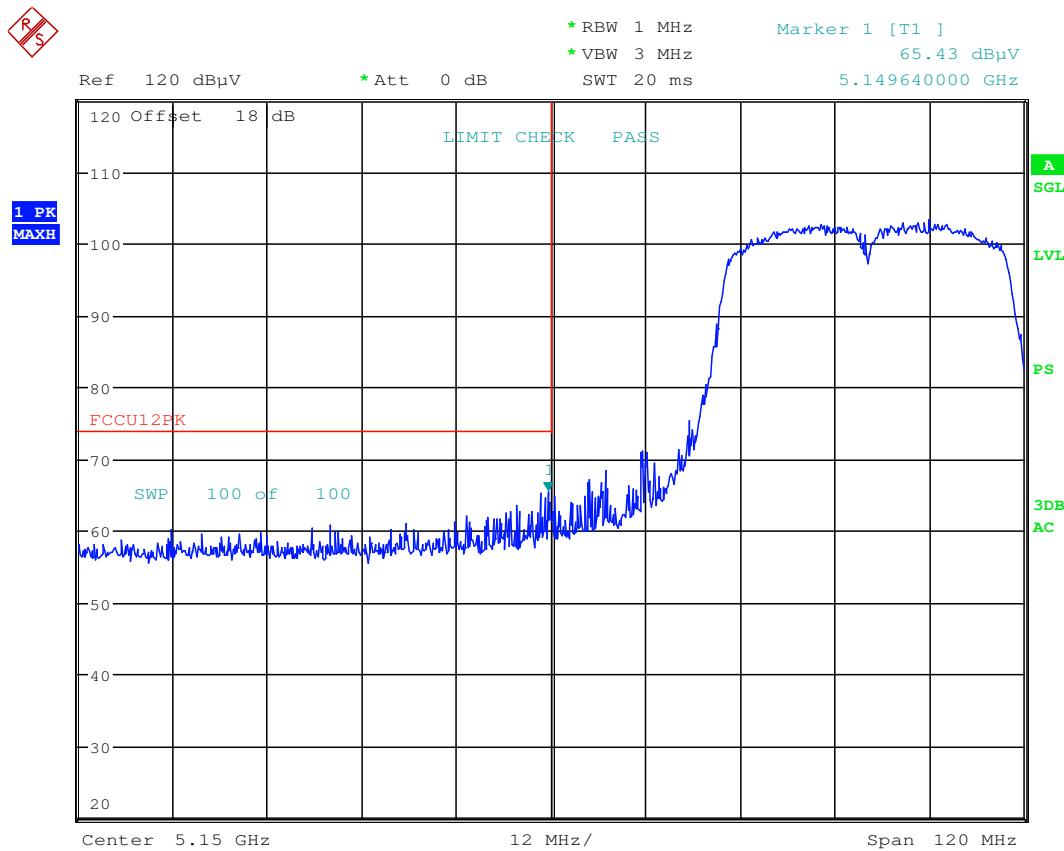

Date: 23.MAR.2016 16:53:41

Plot 7-209. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 169 of 197

MIMO Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5310MHz

Channel: 62




Date: 23.MAR.2016 17:00:55

Plot 7-210. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 170 of 197

MIMO Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

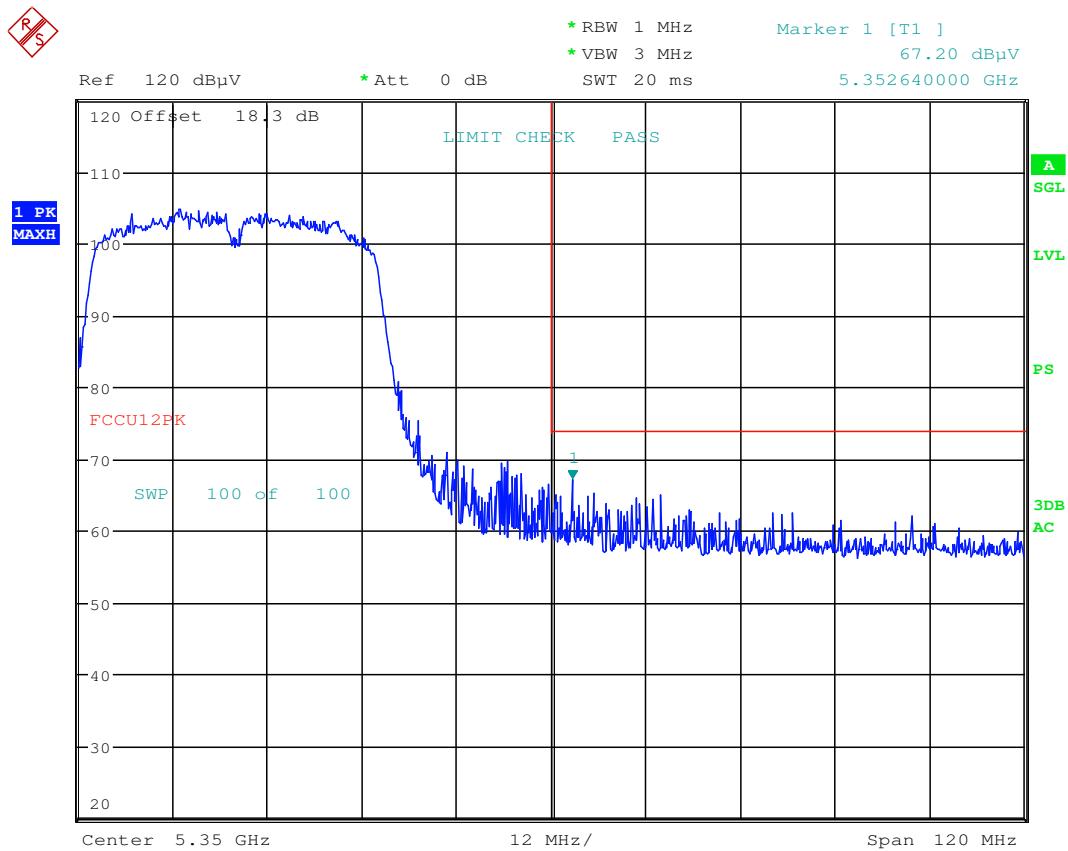

Date: 23.MAR.2016 17:08:09

Plot 7-211. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 171 of 197

MIMO Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 5510MHz

Channel: 102

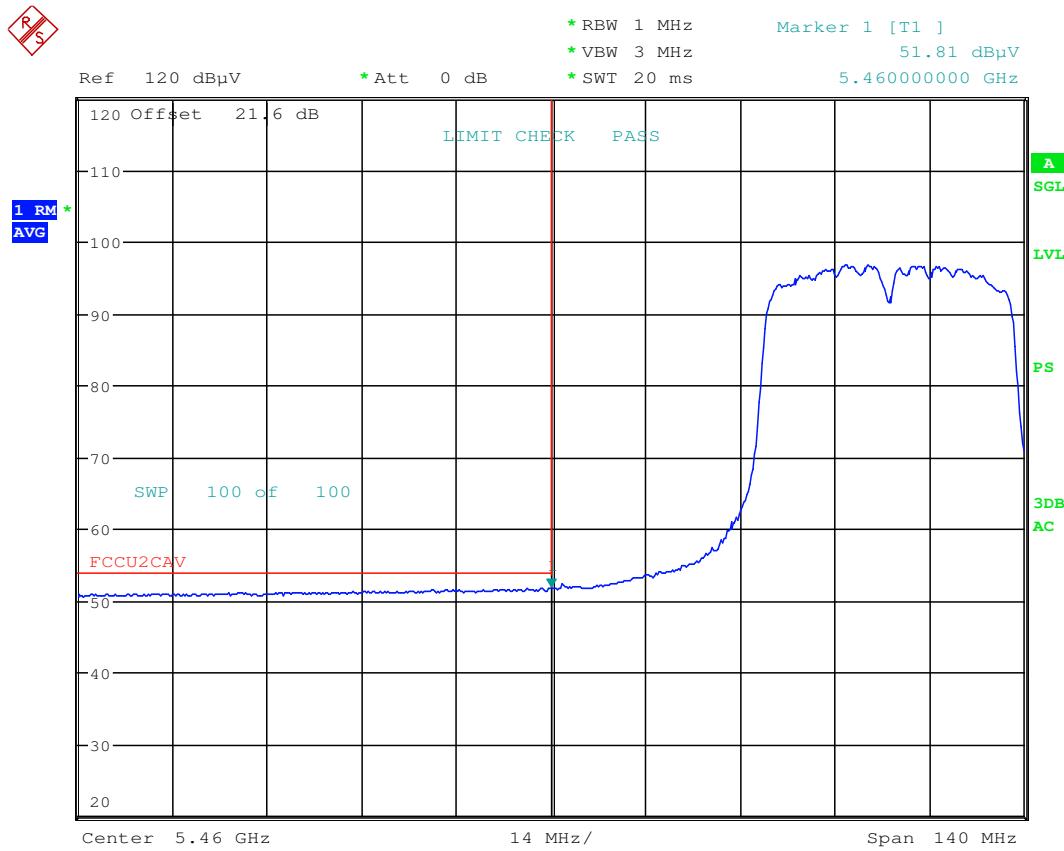


Date: 23.MAR.2016 17:59:25

Plot 7-212. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 172 of 197

MIMO Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

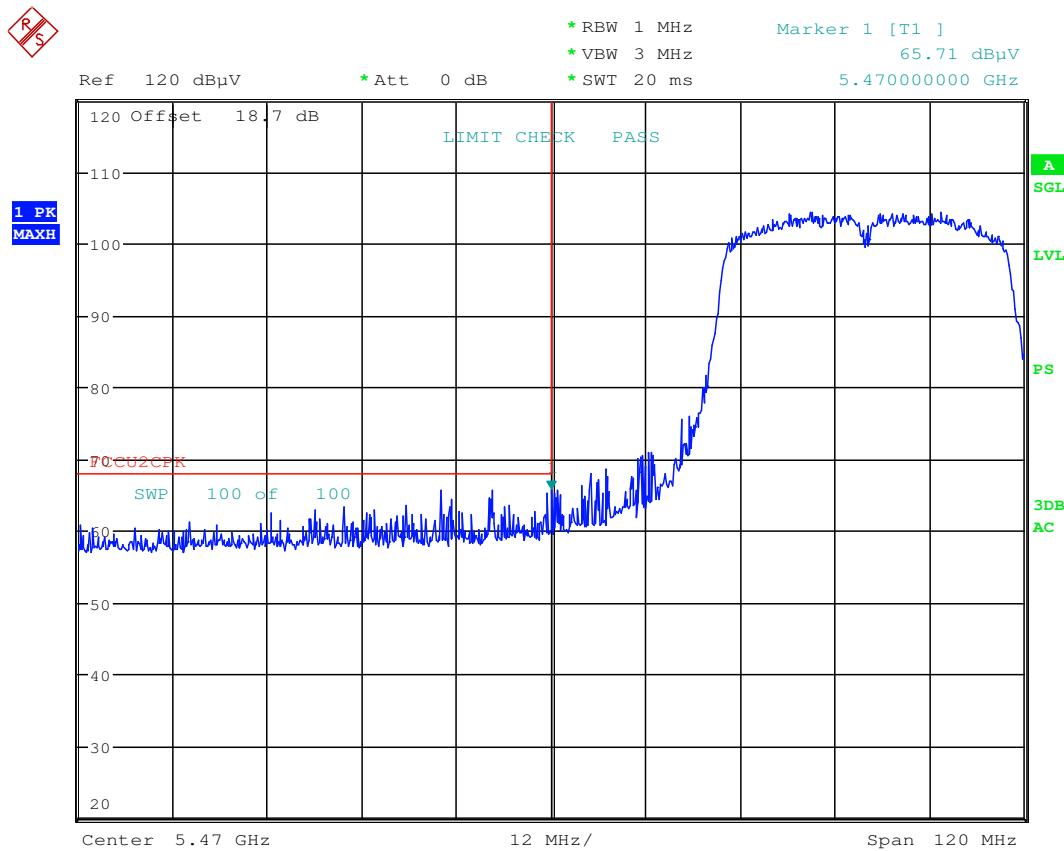

Date: 23.MAR.2016 18:00:52


Plot 7-213. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 173 of 197

MIMO Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)
 Worst Case Transfer Rate: MCS8
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

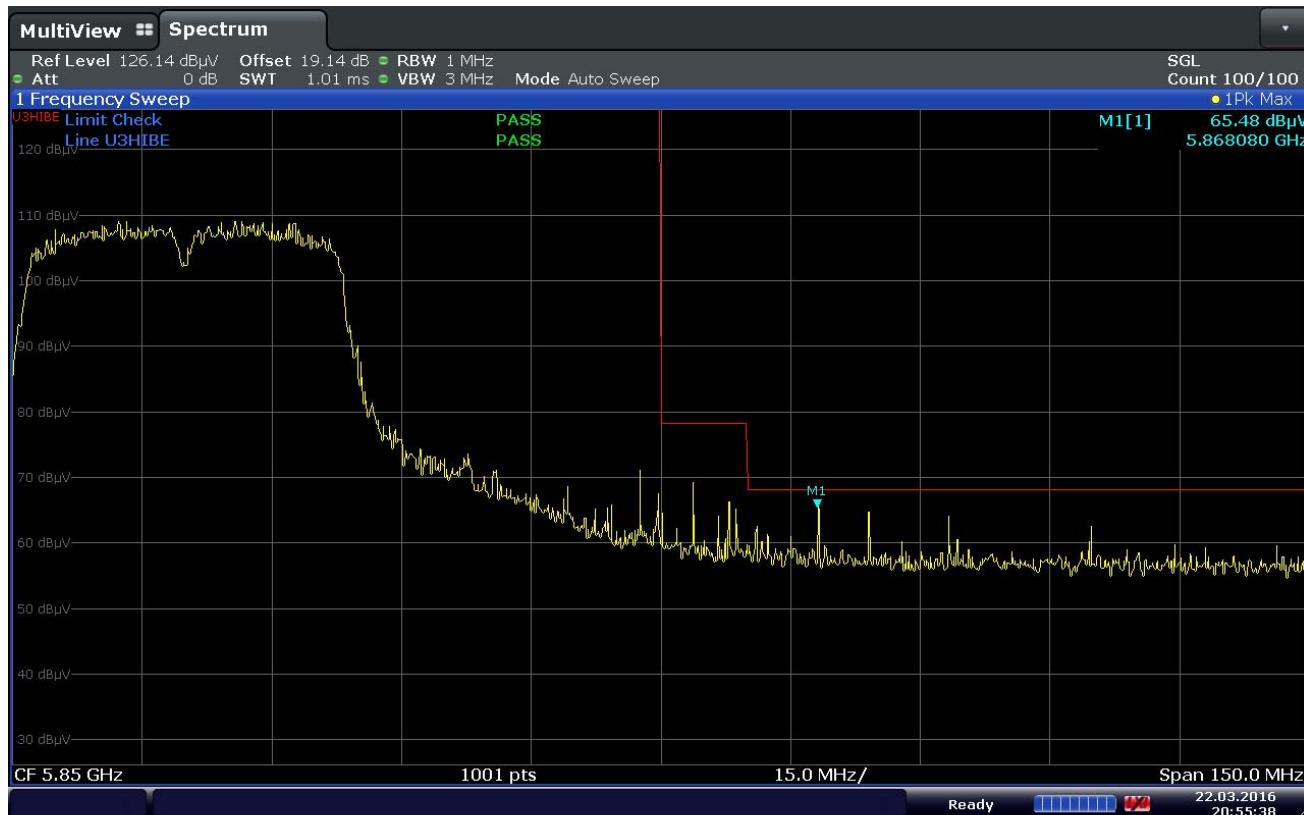

Plot 7-214. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 174 of 197

7.7.11 MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5210MHz

Channel: 42

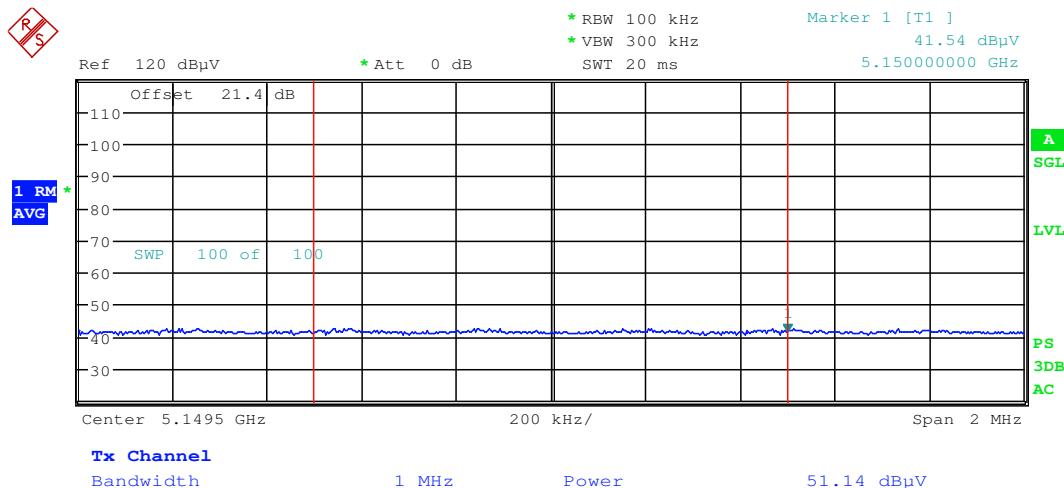


Date: 23.MAR.2016 16:41:57

Plot 7-215. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 175 of 197

MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

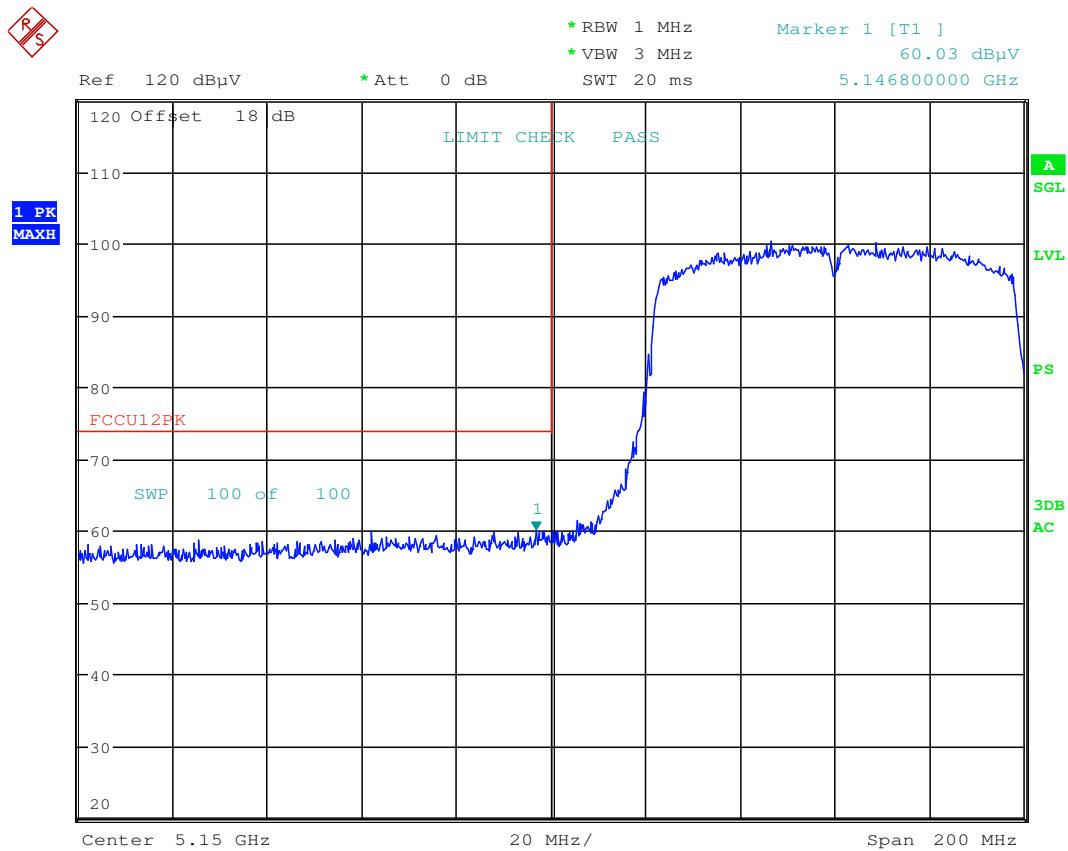

Date: 23.MAR.2016 16:43:45

Plot 7-216. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 176 of 197

MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5290MHz

Channel: 58

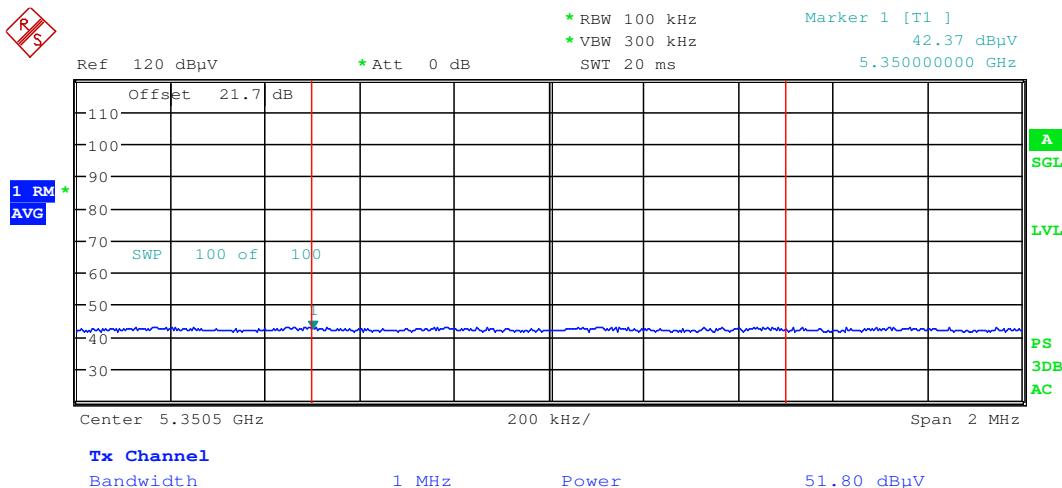

Date: 23.MAR.2016 17:12:03


Plot 7-217. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 177 of 197



MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

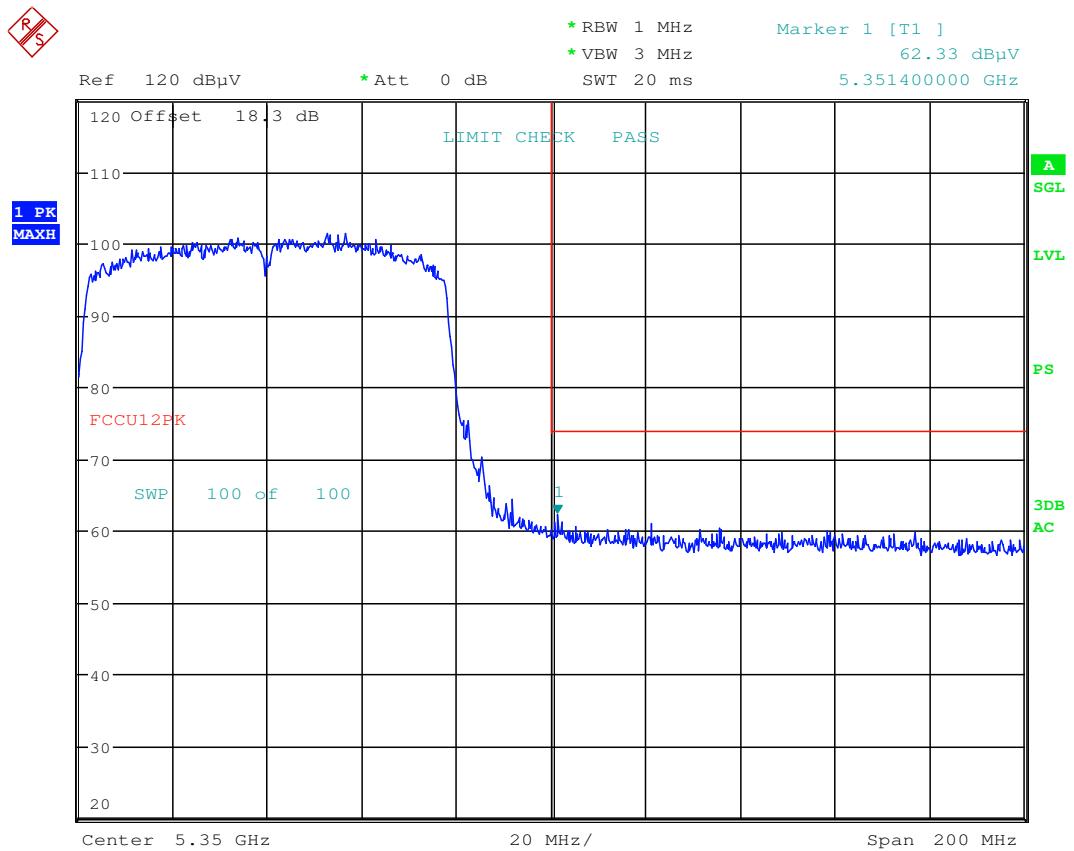

Date: 23.MAR.2016 17:13:20

Plot 7-218. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 178 of 197



MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5530MHz

Channel: 106

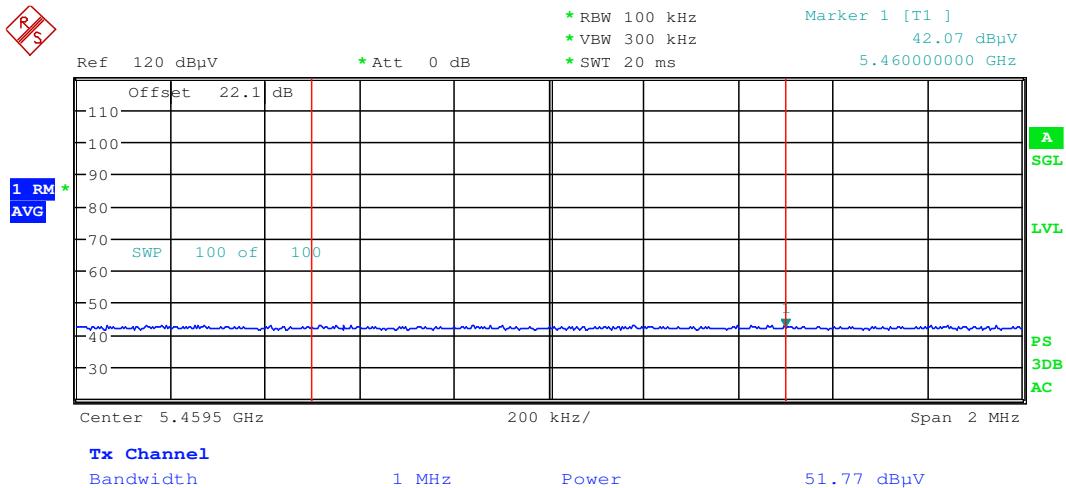


Date: 23.MAR.2016 17:54:07

Plot 7-219. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 179 of 197

MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

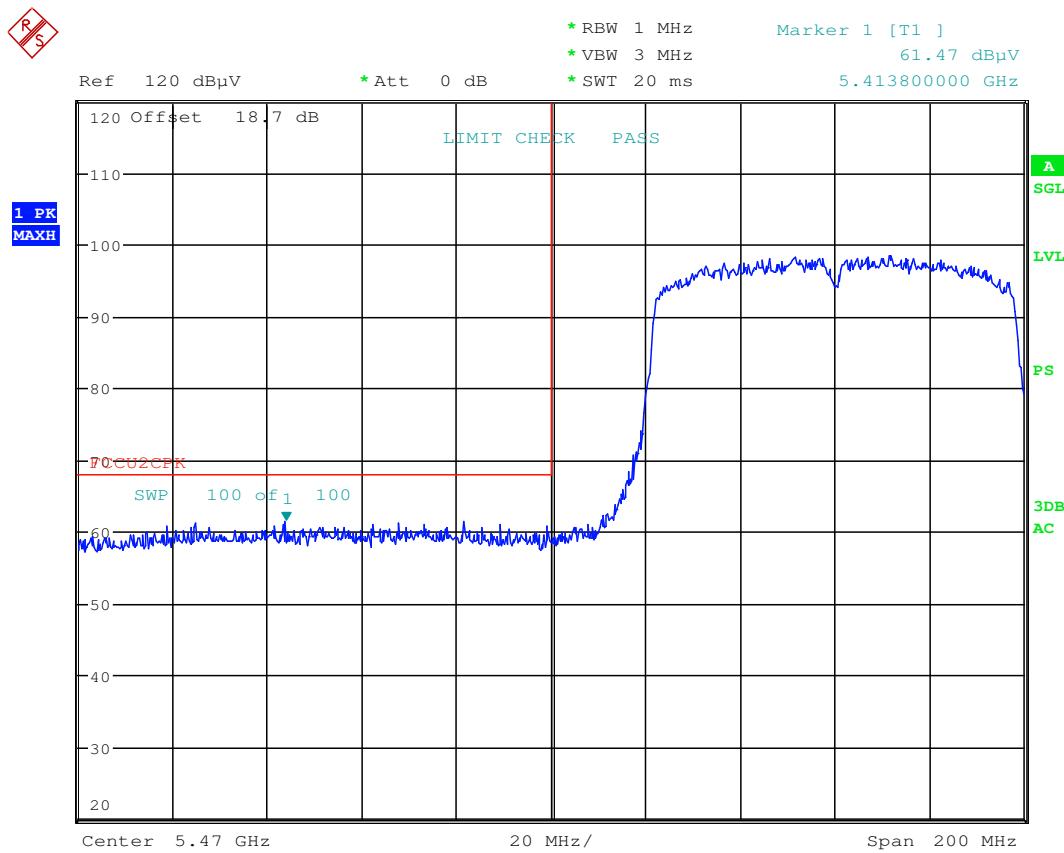

Date: 23.MAR.2016 17:55:54

Plot 7-220. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 180 of 197

MIMO Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5775MHz

Channel: 155

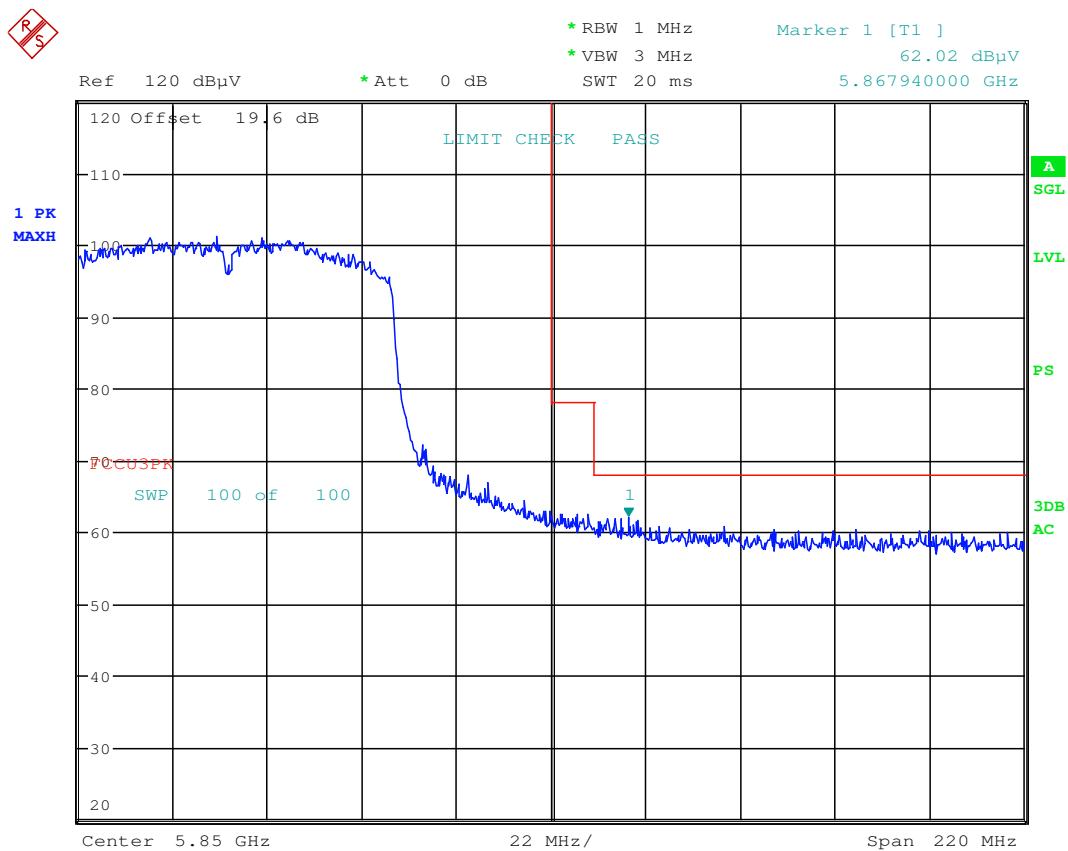

Date: 23.MAR.2016 18:14:20

Plot 7-221. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 181 of 197



7.8 Radiated Spurious Emissions Measurements – Below 1GHz

[\\$15.209](#)

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-52 per Section 15.209.

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-52. Radiated Limits

Test Procedures Used

ANSI C63.4-2014

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 182 of 197

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

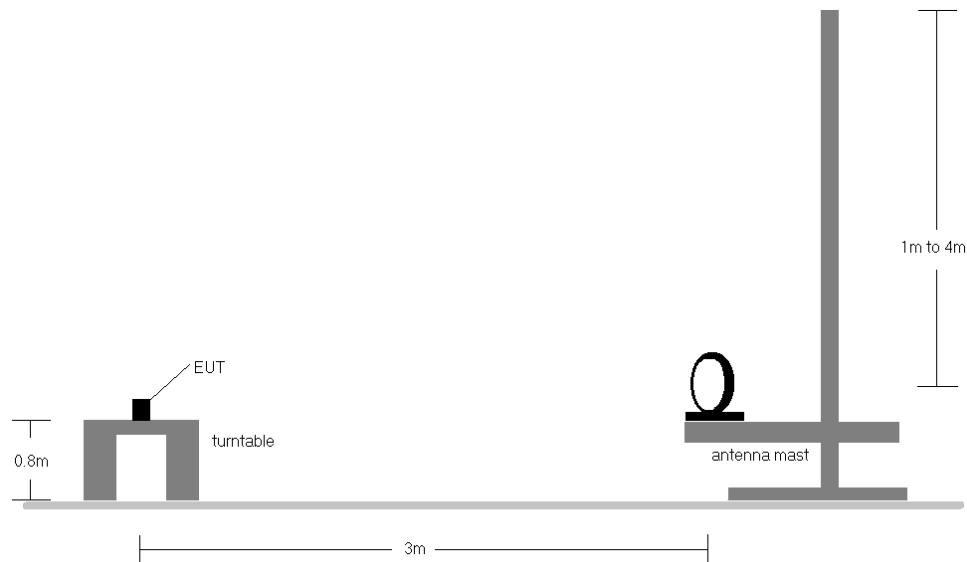


Figure 7-6. Radiated Test Setup < 30MHz

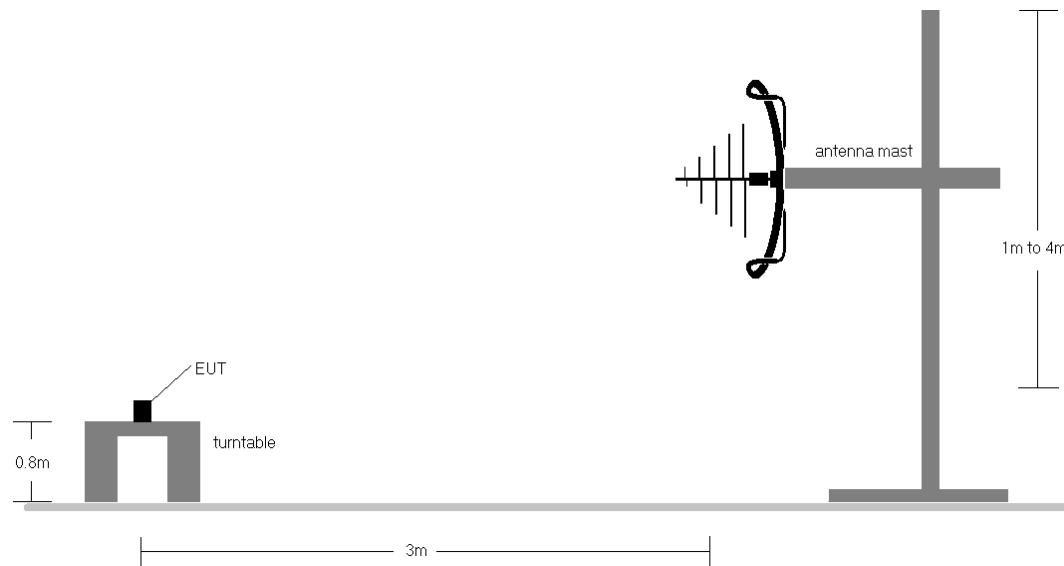


Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 183 of 197

Test Notes


1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-27.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 184 of 197




Antenna-1 Radiated Spurious Emissions Measurements (Below 1GHz)

\$15.209

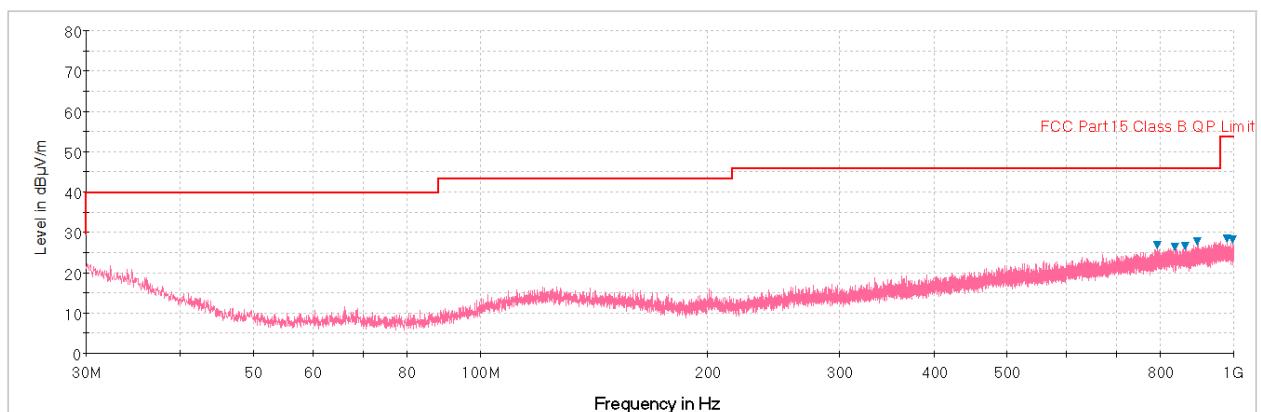

Plot 7-222. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

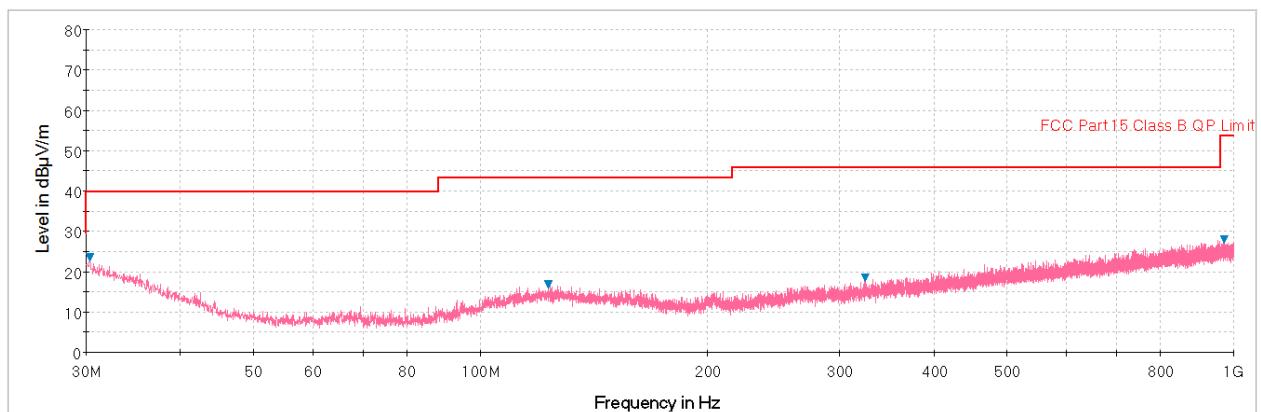


Plot 7-223. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)


FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 185 of 197

Antenna-2 Radiated Spurious Emissions Measurements (Below 1GHz)

\$15.209

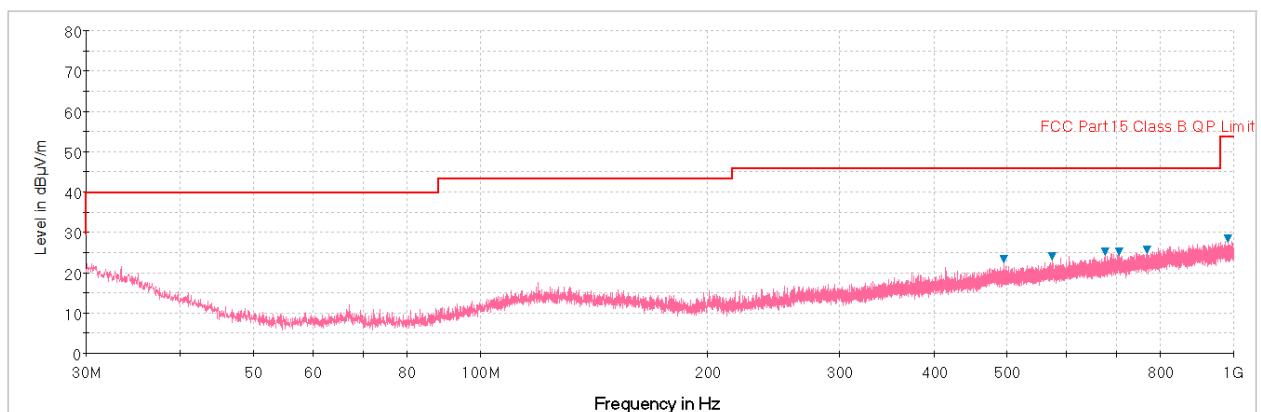

Plot 7-224. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

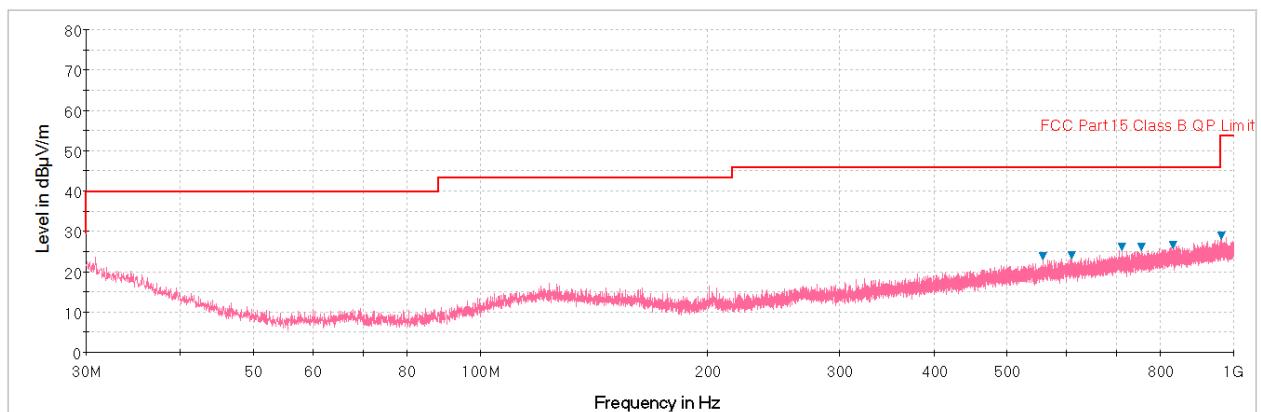

Plot 7-225. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 186 of 197

7.9 Line-Conducted Test Data

[\\$15.407](#)

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207.

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-53. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 187 of 197

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

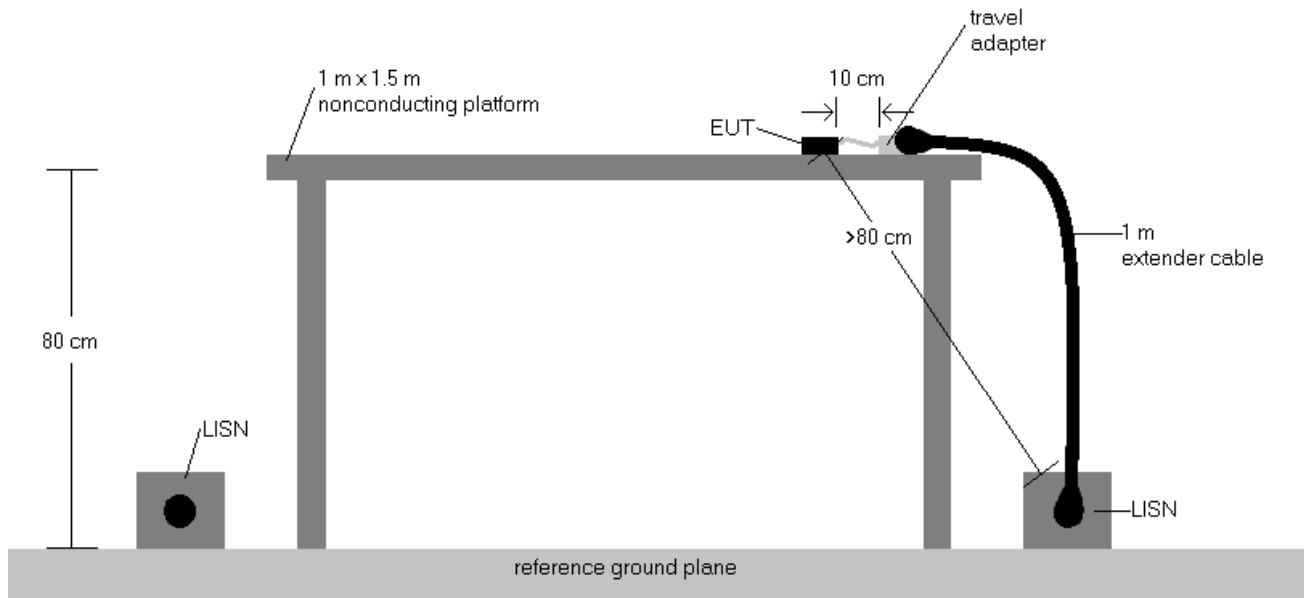


Figure 7-8. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207.
3. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dB μ V) = QP/AV Analyzer/Receiver Level (dB μ V) + Corr. (dB)
5. Margin (dB) = QP/AV Limit (dB μ V) - QP/AV Level (dB μ V)
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 188 of 197

Line-Conducted Test Data

\$15.407

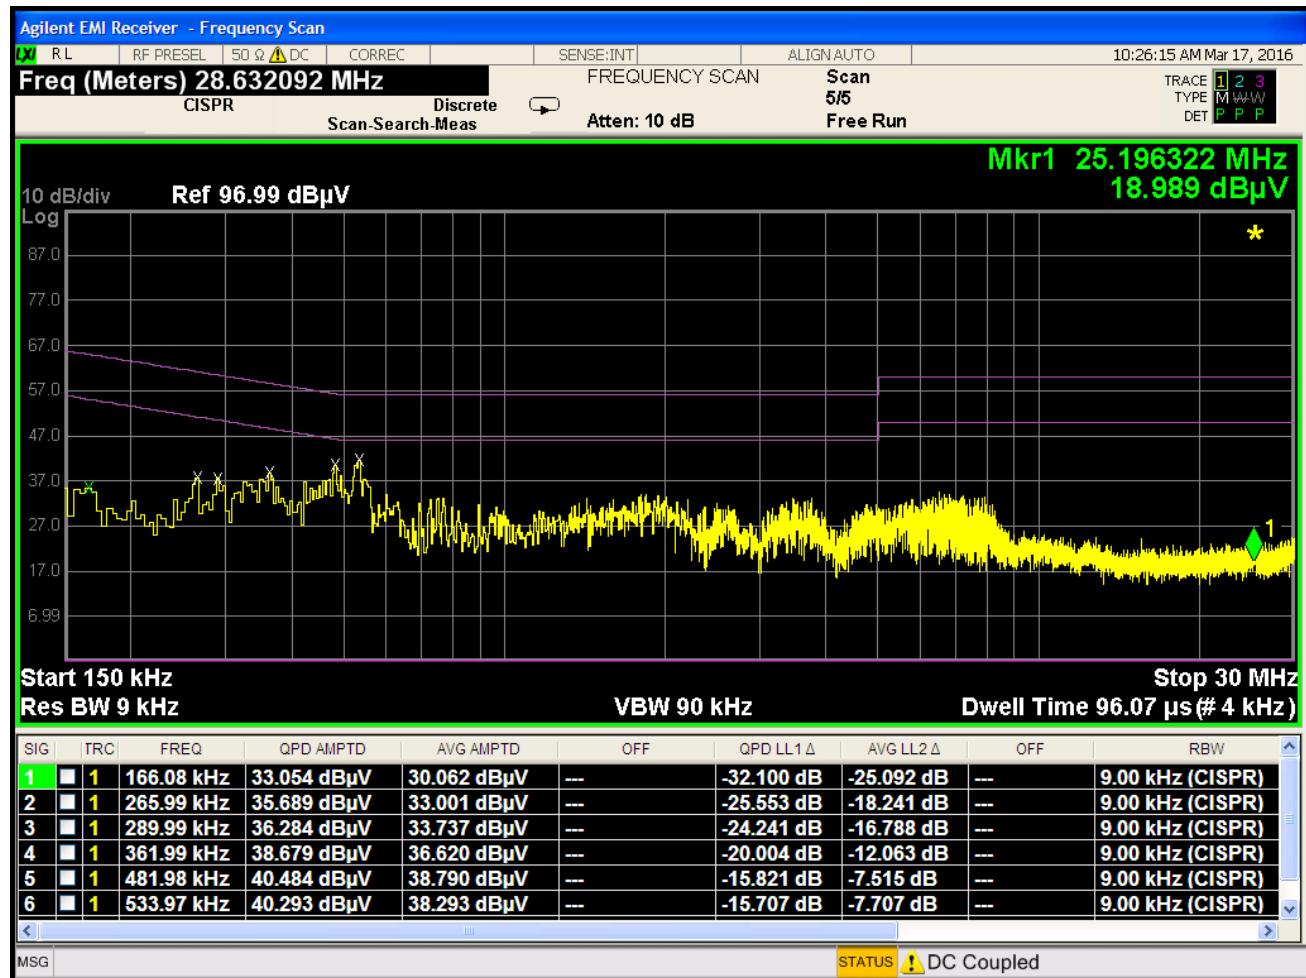


Plot 7-226. Line Conducted Plot with 802.11a UNII Band 1 (L1)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 189 of 197

Line-Conducted Test Data

\$15.407

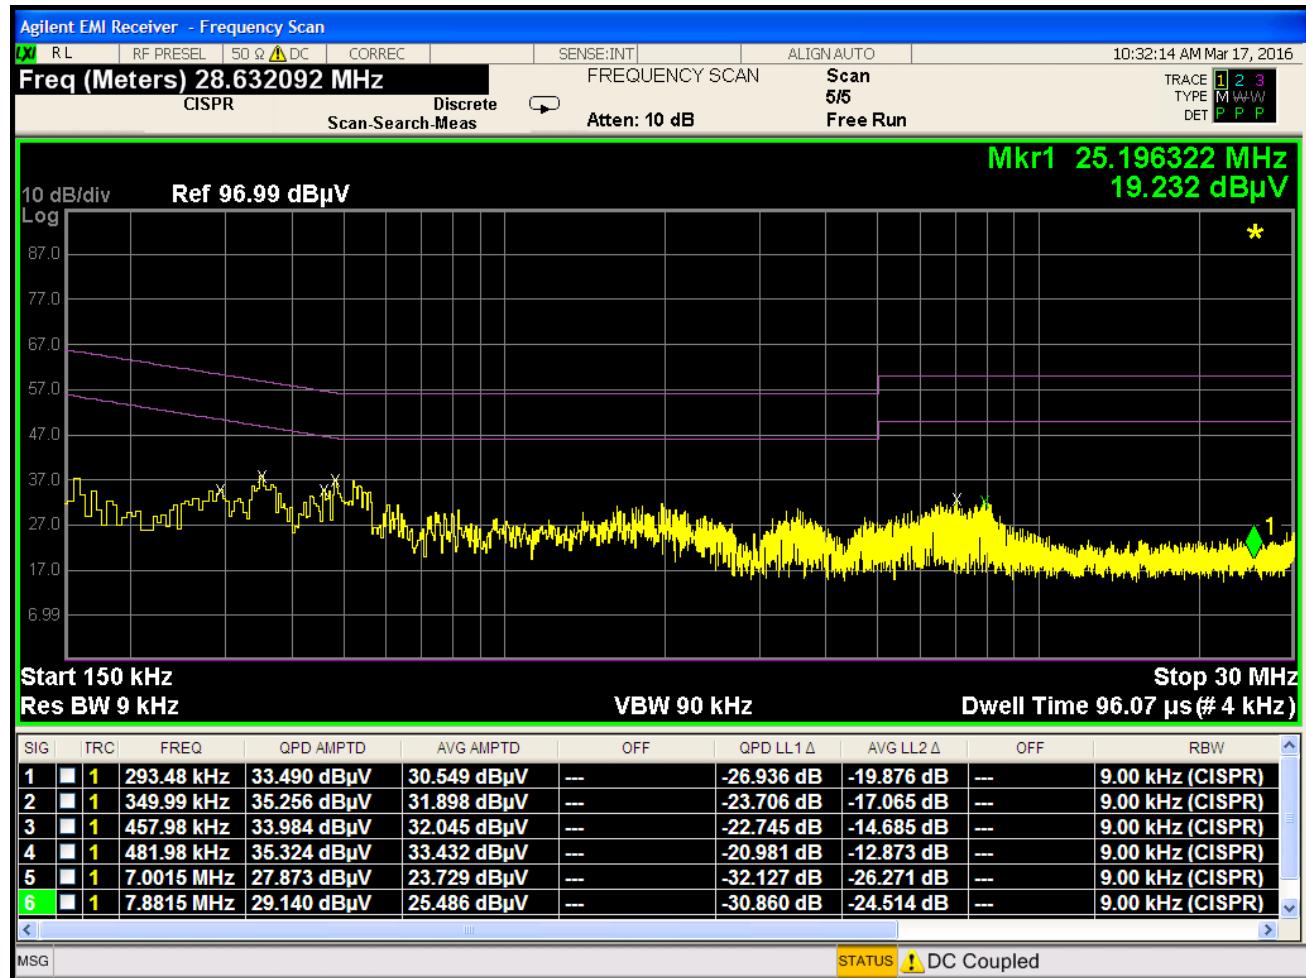


Plot 7-227. Line Conducted Plot with 802.11a UNII Band 1 (N)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 190 of 197

Line-Conducted Test Data

\$15.407

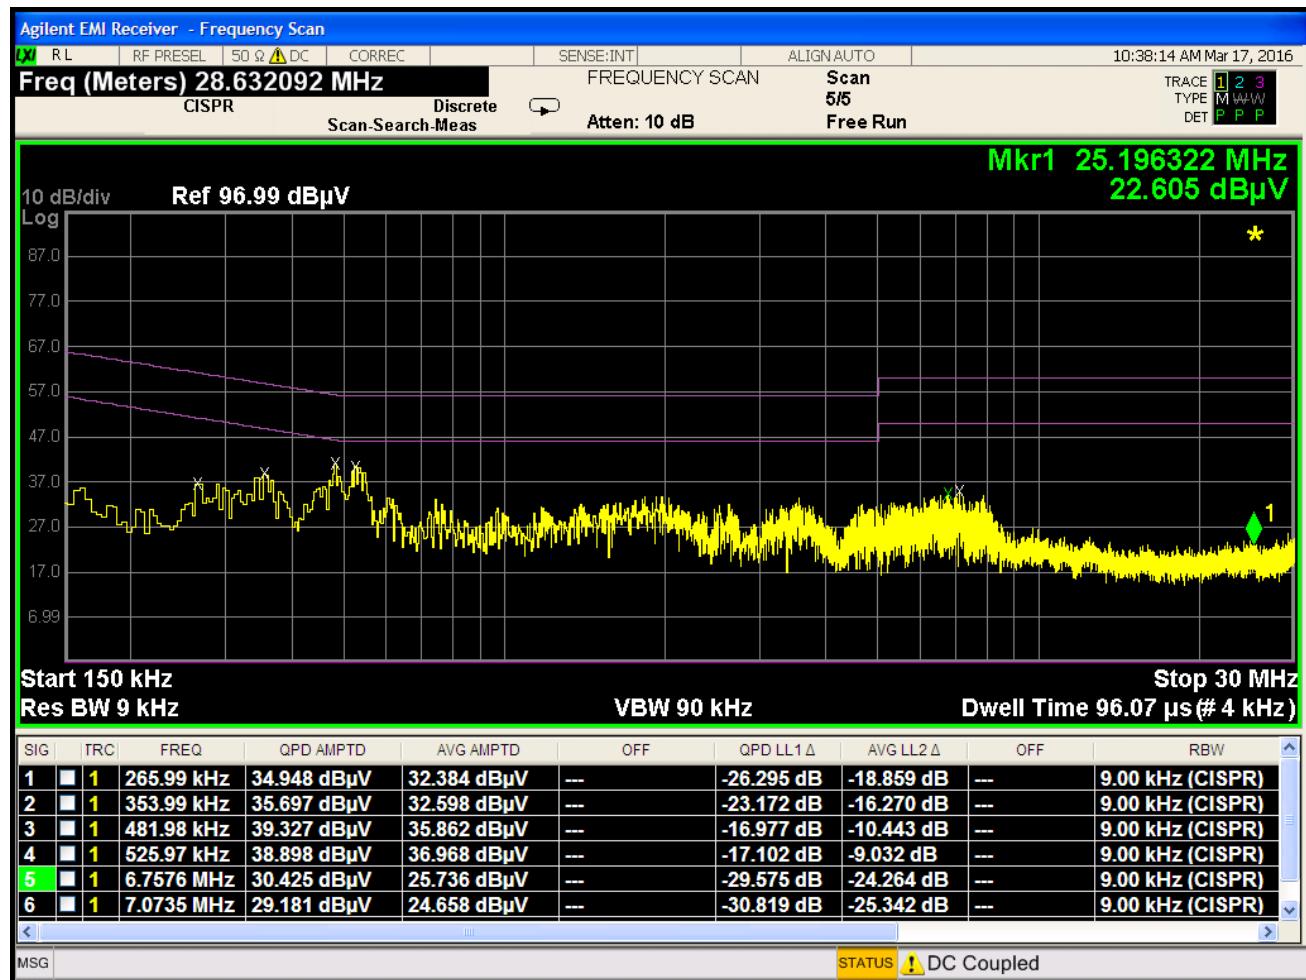


Plot 7-228. Line Conducted Plot with 802.11a UNII Band 2A (L1)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 191 of 197



Line-Conducted Test Data

\$15.407

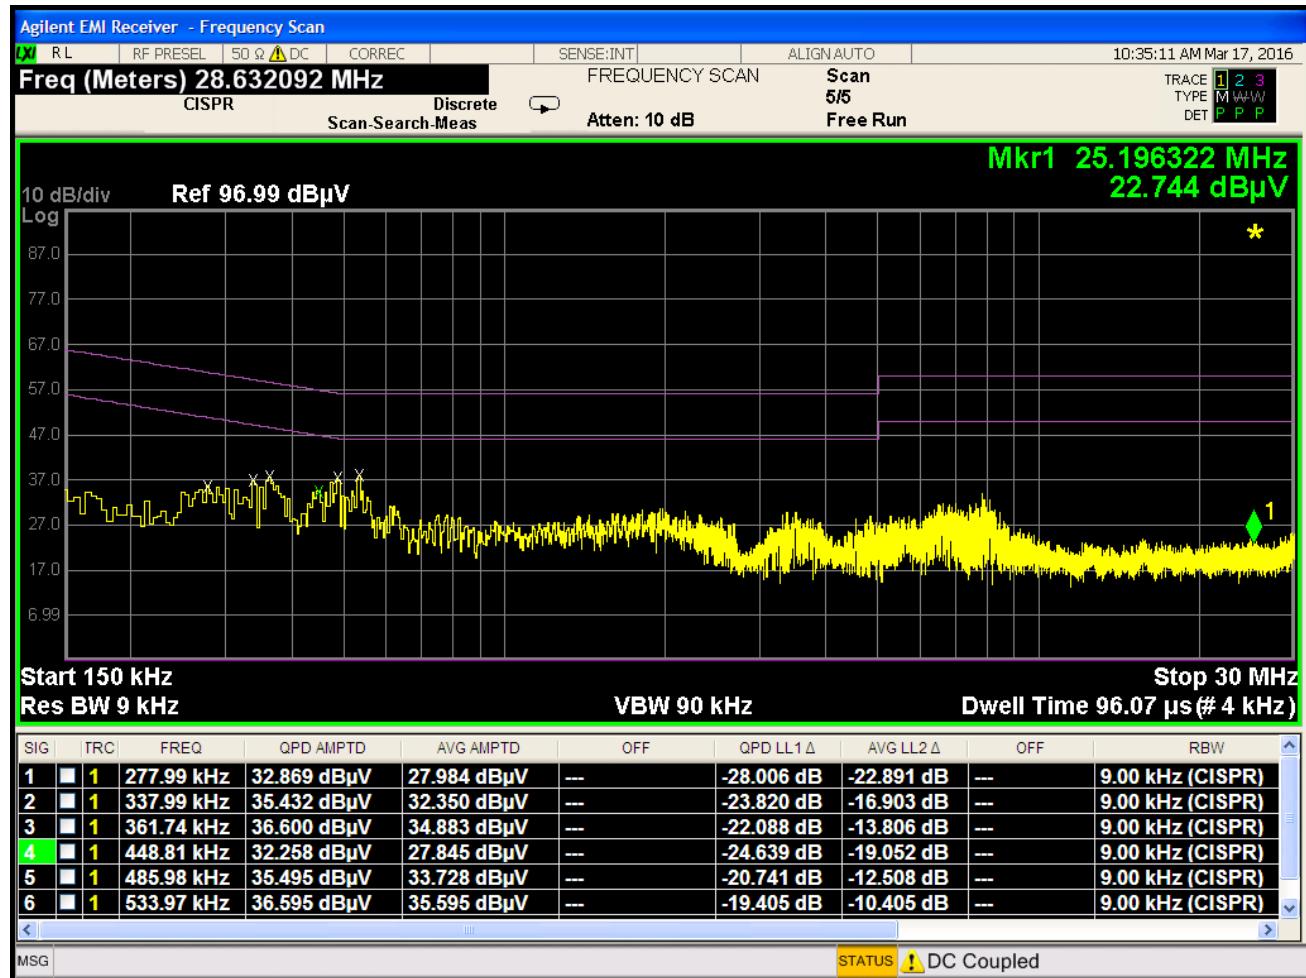


Plot 7-229. Line Conducted Plot with 802.11a UNII Band 2A (N)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 192 of 197



Line-Conducted Test Data

\$15.407

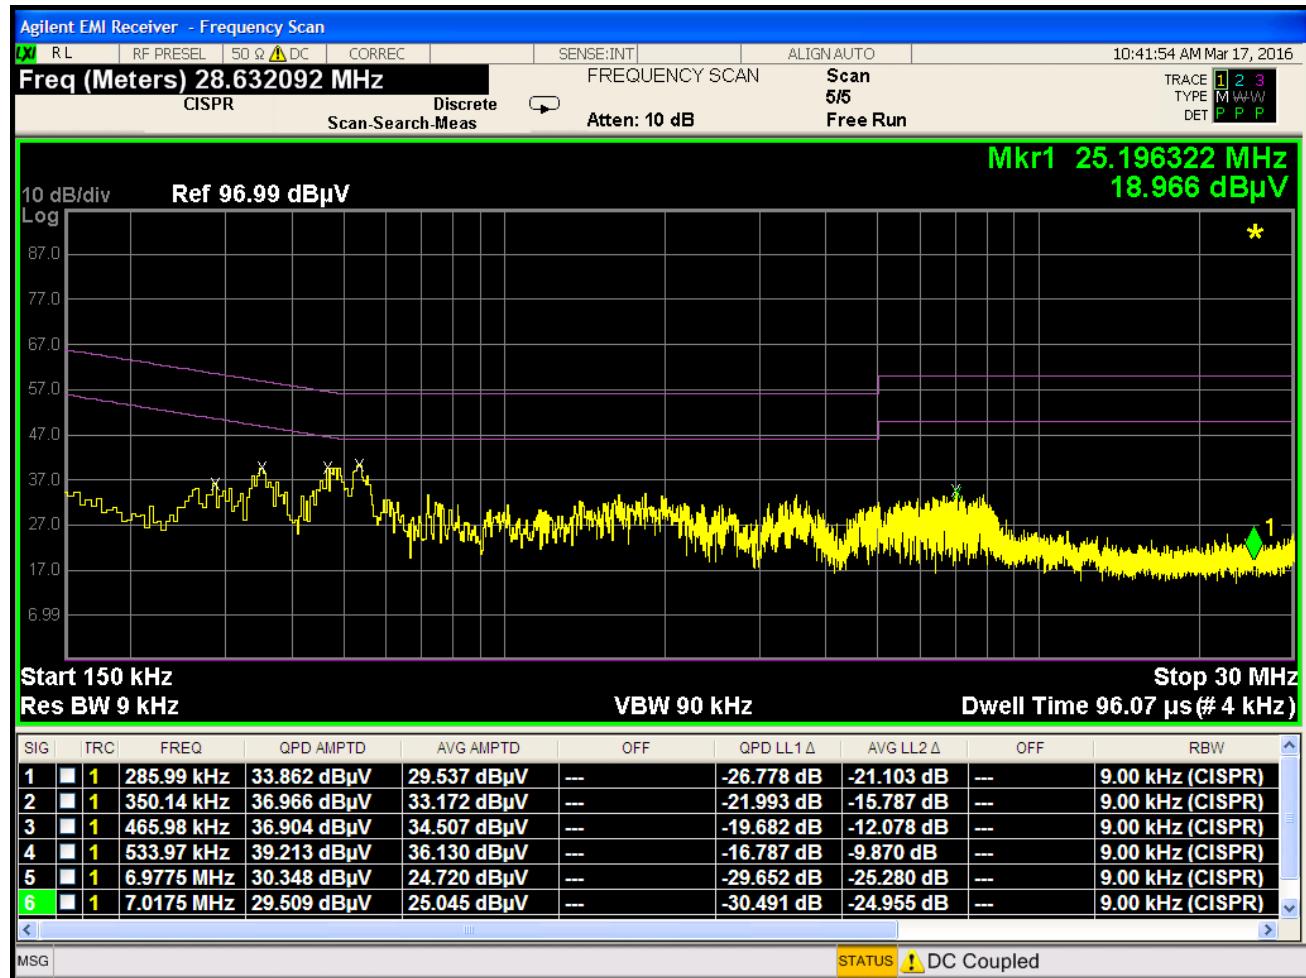


Plot 7-230. Line Conducted Plot with 802.11a UNII Band 2C (L1)

FCC ID: A3LSMT713	PCTEST Engineering Laboratory, Inc.		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet			Page 193 of 197



Line-Conducted Test Data

\$15.407

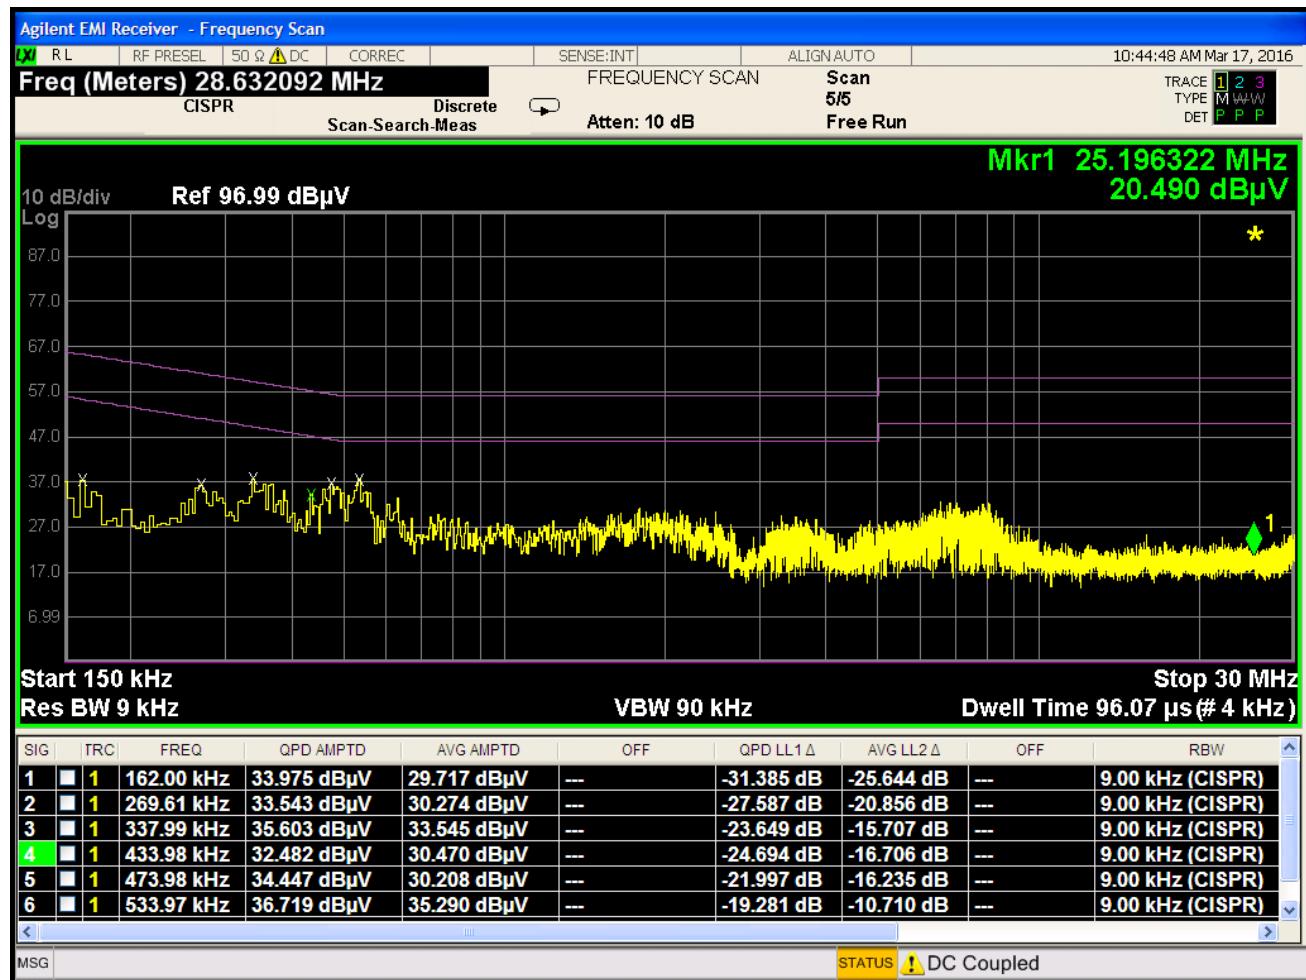


Plot 7-231. Line Conducted Plot with 802.11a UNII Band 2C (N)

FCC ID: A3LSMT713	PCTEST Engineering Laboratory, Inc.		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet			Page 194 of 197

Line-Conducted Test Data

\$15.407

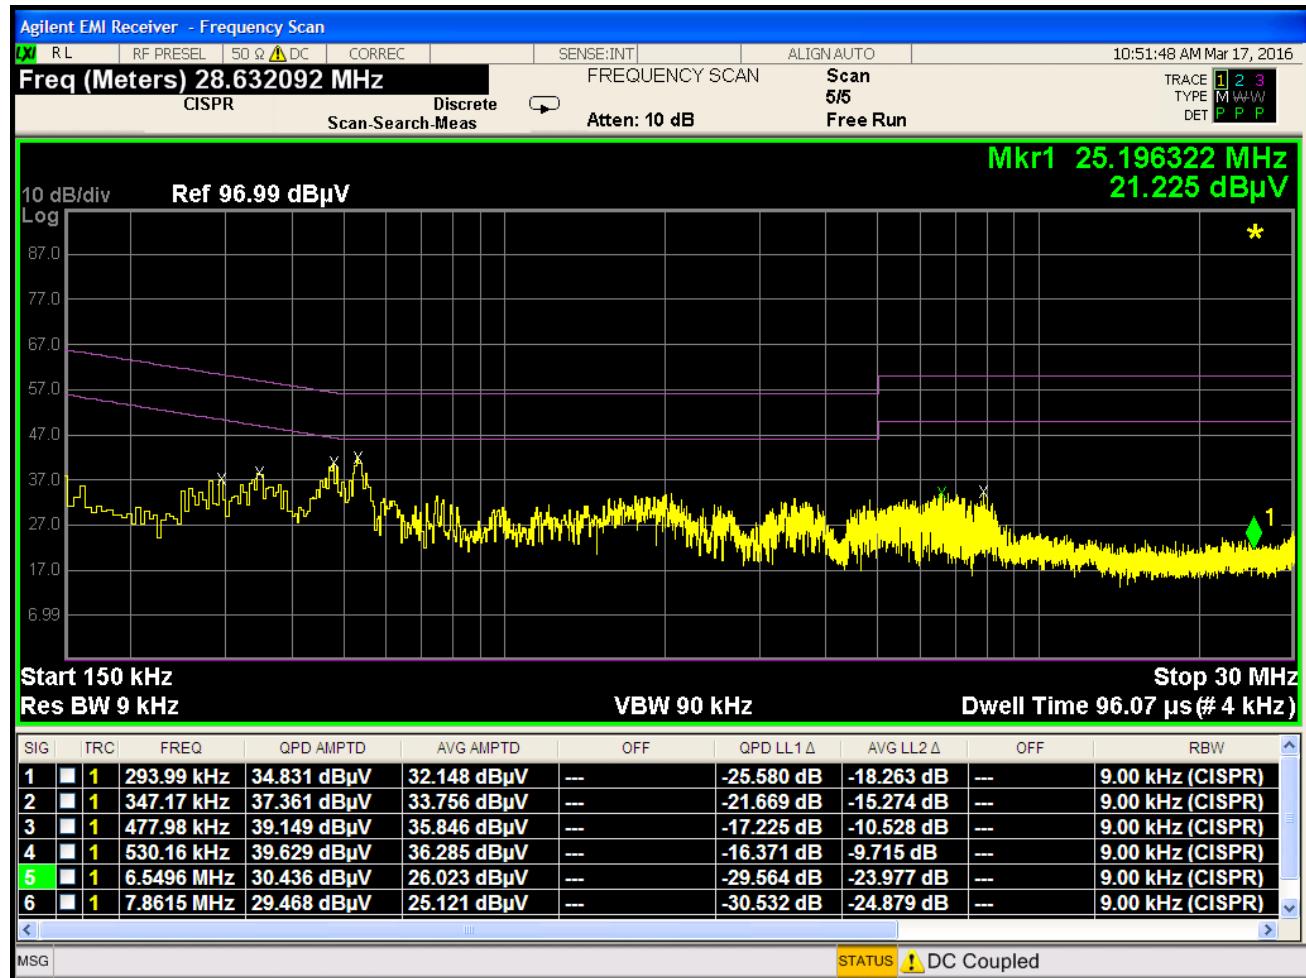


Plot 7-232. Line Conducted Plot with 802.11a UNII Band 3 (L1)

FCC ID: A3LSMT713		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 195 of 197



Line-Conducted Test Data

\$15.407

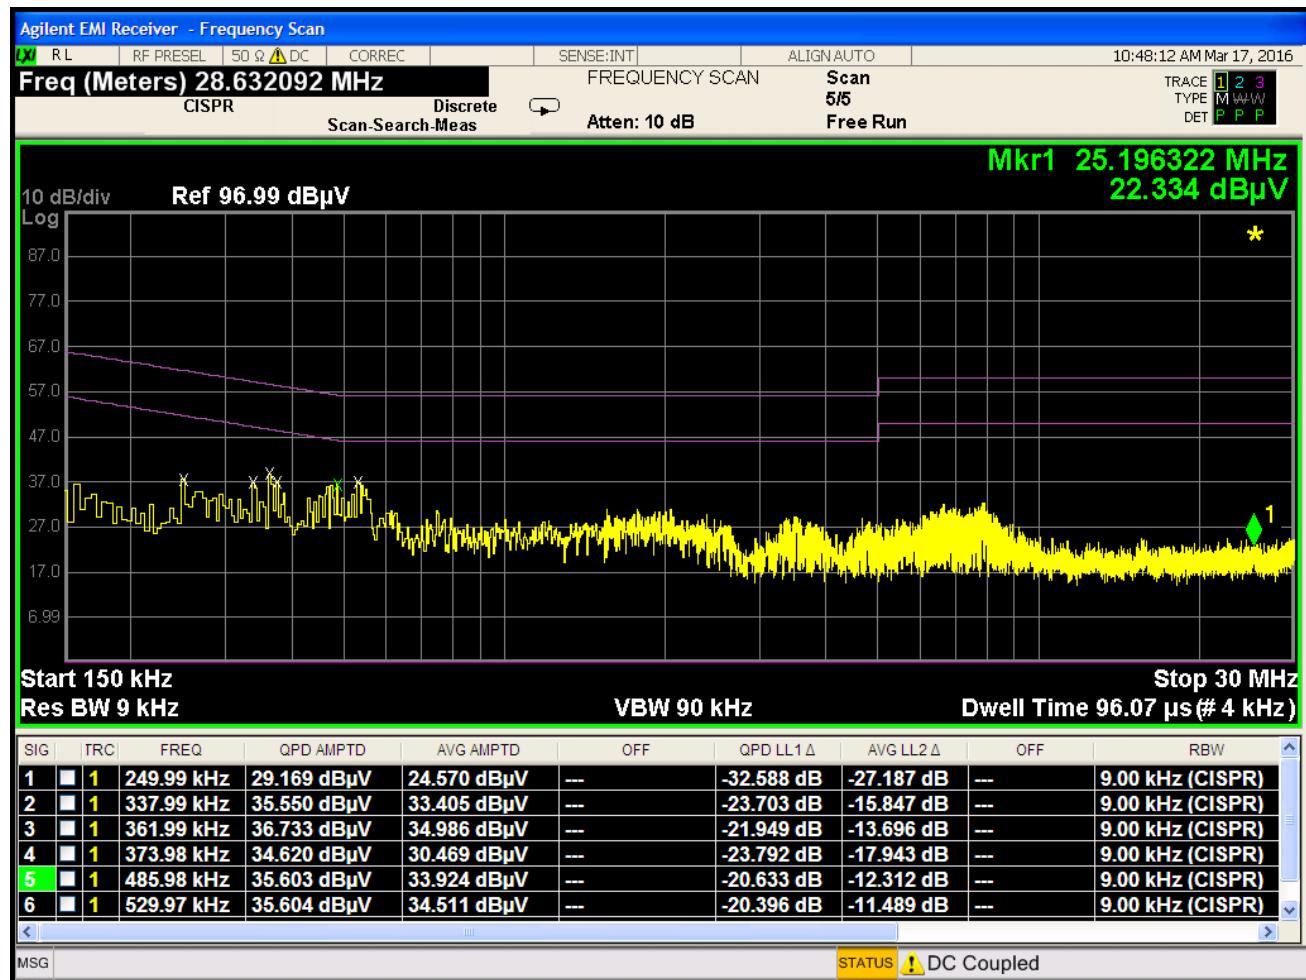

Plot 7-233. Line Conducted Plot with 802.11a UNII Band 3 (N)

FCC ID: A3LSMT713	PCTEST Engineering Laboratory, Inc.		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet			Page 196 of 197

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Tablet** **FCC ID: A3LSMT713** is in compliance with Part 15E of the FCC Rules.

FCC ID: A3LSMT713	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1603160553.A3L	Test Dates: 3/16 - 3/24/2016	EUT Type: Portable Tablet		Page 197 of 197