



# **CERTIFICATION TEST REPORT**

**Report Number.** : 4789867697-E3V3

**Applicant** : SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 16677, KOREA

**Model** : SM-T730

**FCC ID** : A3LSMT730

**IC** : 649E-SMT730

**EUT Description** : DTS/UNII a/b/g/n/ac Tablet + BT/BLE

**Test Standard(s)** : FCC 47 CFR PART 15 SUBPART C  
INDUSTRY CANADA RSS-247 Issue 2  
INDUSTRY CANADA RSS-GEN Issue 5

**Date Of Issue:**

2021-05-03

**Prepared by:**

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2021-04-27	Initial issue	Hyunsik Yun
V2	2021-04-30	Updated to address TCB's question	Hyunsik Yun
V3	2021-05-03	Updated to address TCB's question	Hyunsik Yun

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b>	<b>5</b>
1.1. INTRODUCTION OF TEST DATA REUSE	6
1.2. DIFFERENCE	6
1.3. SPOT CHECK VERIFICATION DATA	6
1.4. REFERENCE DETAIL	7
<b>2. TEST METHODOLOGY</b>	<b>8</b>
<b>3. FACILITIES AND ACCREDITATION</b>	<b>8</b>
<b>4. DECISION RULES AND MEASUREMENT UNCERTAINTY</b>	<b>9</b>
4.1. METROLOGICAL TRACEABILITY	9
4.2. SAMPLE CALCULATION	9
4.3. DECISION RULES	9
4.4. MEASUREMENT UNCERTAINTY	9
<b>5. EQUIPMENT UNDER TEST</b>	<b>10</b>
5.1. EUT DESCRIPTION	10
5.2. MAXIMUM OUTPUT POWER	10
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	10
5.4. WORST-CASE CONFIGURATION AND MODE	11
5.5. DESCRIPTION OF TEST SETUP	12
<b>6. TEST AND MEASUREMENT EQUIPMENT</b>	<b>14</b>
<b>7. TEST RESULTS SUMMARY</b>	<b>15</b>
<b>8. MEASUREMENT METHODS</b>	<b>16</b>
<b>9. ANTENNA PORT TEST RESULTS</b>	<b>17</b>
9.1. ON TIME AND DUTY CYCLE	17
9.2. 20 dB AND 99% BANDWIDTH	18
9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	18
9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	18
9.3. HOPPING FREQUENCY SEPARATION	21
9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	22
9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	22
9.4. NUMBER OF HOPPING CHANNELS	23
9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	24
9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	25
9.5. AVERAGE TIME OF OCCUPANCY	26
9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	27

---

9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	29
<b>9.6. OUTPUT POWER.....</b>	<b>31</b>
9.6.1. BASIC DATA RATE GFSK MODULATION.....	31
9.6.2. ENHANCED DATA RATE PI/4-DPSK MODULATION .....	31
9.6.3. ENHANCED DATA RATE 8PSK MODULATION .....	31
9.6.4. OUTPUT POWER PLOTS.....	32
<b>9.7. AVERAGE POWER .....</b>	<b>34</b>
9.7.1. BASIC DATA RATE GFSK MODULATION.....	34
9.7.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION .....	34
9.7.3. ENHANCED DATA RATE 8PSK MODULATION .....	34
<b>9.8. CONDUCTED SPURIOUS EMISSIONS.....</b>	<b>35</b>
9.8.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION .....	36
9.8.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	38
<b>10. RADIATED TEST RESULTS .....</b>	<b>40</b>
10.1. TRANSMITTER ABOVE 1 GHz.....	42
10.1.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION .....	42
10.1.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION .....	49
10.2. WORST CASE BELOW 1 GHZ.....	56
<b>11. AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>57</b>
11.1.1. AC Power Line.....	58

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.  
**EUT DESCRIPTION:** DTS/UNII a/b/g/n/ac Tablet + BT/BLE  
**MODEL:** SM-T730  
**SERIAL NUMBER:** R32R2009HKX (Conducted, Original);  
R32R2009QPH, R32R2009K5M, R32R300FS7B (Radiated, Original);  
R32R30060LW (Radiated, Spot-check);  
**DATE TESTED:** 2021-03-16 ~ 2021-04-14(Original);  
2021-04-13 ~ 2021-04-27(Spot-check);

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
INDUSTRY CANADA RSS-247 Issue 2	Complies
INDUSTRY CANADA RSS-GEN Issue 5	Complies

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:



Junwhan Lee  
Suwon Lab Engineer  
UL Korea, Ltd.

Tested By:



Hyunsik Yun  
Suwon Lab Engineer  
UL Korea, Ltd.

### 1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMT736B BT(FCC CFR 47 Part 15C).  
 And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

### 1.2. DIFFERENCE

The FCC ID: A3LSMT730(IC : 649E-SMT730, Model number : SM-T730) shares the same enclosure and circuit board as FCC ID: A3LSMT736B(Model number : SM-T736B). The BT antennas and surrounding circuitry and layout are identical between these two units for re-used bands.

In SM-T730 model, all of the RF parts(5G/LTE/WCDMA/GSM) are removed from the PCB.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMT736B(Model number : SM-T736B) remains representative of FCC ID: A3LSMT730(IC : 649E-SMT730, Model number : SM-T730). The test data of FCC ID: A3LSMT736B(Model number : SM-T736B) being submitted for this application to cover BT features.

Model number, SM-T736B, is not certified for ISED certification.

### 1.3. SPOT CHECK VERIFICATION DATA

Band	Test Item	Mode	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
					SM-T736B	SM-T730		
					FCC ID : A3LSMT736B	FCC ID : A3LSMT730		
DSS BT	Band Edge	GFSK 2480	2480 MHz	54 dBuV/m	42.69 dBuV/m	42.55 dBuV/m	-0.14 dB	
	RSE	GFSK 2480	4960 MHz	74 dBuV/m	55.97 dBuV/m	45.27 dBuV/m	-10.70 dB	

Comparison of two models, upper deviation is within 3dB range and all test results are under FCC technical limits.

**1.4. REFERENCE DETAIL**

Reference application that contains the re-used reference data.

Equipment Class	Reference FCC ID	Application Type	Reference Test report	Reuse (EMC/RFX)	Report Title / Section
DTS	A3LSMT736B	Original Grant	4789841420-E3	EMC	Report DTS[b,g,n] WLAN/ All sections
			4789841420-E4	EMC	FCC Report BLE/ All sections
DSS	A3LSMT736B	Original Grant	4789841420-E5	EMC	FCC Report BT/ All sections
NII	A3LSMT736B	Original Grant	4789841420-E6	EMC	FCC Report UNII[a,n,ac] WLAN/ All sections

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. IC RSS-GEN Issue 5
4. IC RSS-247 Issue 2
5. KDB 558074 D01 15.247 Meas Guidance v05r02.
6. ANSI C63.10-2013.
7. KDB 484596 D01 Referencing Test Data v01

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2
<input type="checkbox"/>	Chamber 3

Used ISED Test Site Reg.(company number): 2324L  
CAB Identifier: KR0161

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.



## 4. DECISION RULES AND MEASUREMENT UNCERTAINTY

### 4.1. METROLOGICAL TRACEABILITY

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. DECISION RULES

Decision rule for statement(s) of conformity is based on Procedure 1, Clause 4.4.2 in IEC Guide 115:2007.

### 4.4. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.01 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.26 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.90 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.49 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. EUT DESCRIPTION

The EUT is a DTS/UNII a/b/g/n/ac Tablet + BT/BLE.  
This test report addresses the BT(DSS) operational mode.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2 402 ~ 2 480	Basic GFSK	Average	17.261	53.22
		Peak	17.696	58.83
	Enhanced Pi/4-DPSK	Average	15.450	35.08
		Peak	17.893	61.56
	Enhanced 8PSK	Average	15.473	35.26
		Peak	18.517	71.07

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.  
Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes an internal antennas, with maximum gain of -1.71 dBi.


## 5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Foldable condition: Stand Alone

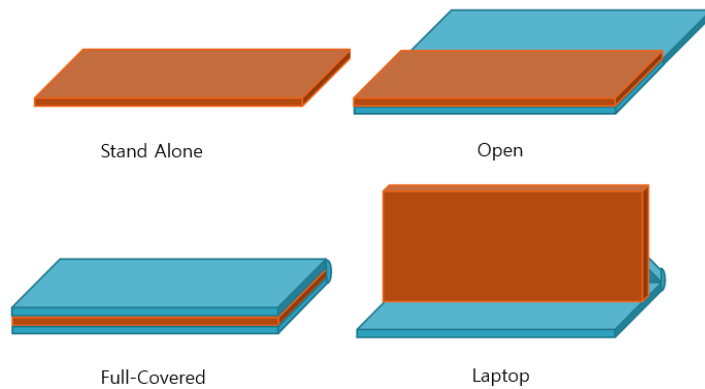

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA200	R37R1XS0P35DK3	N/A
Data Cable	SAMSUNG	EP-DT725BBE	N/A	N/A


### I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A


### TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.  
Test software enable BT communications.

**SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)**

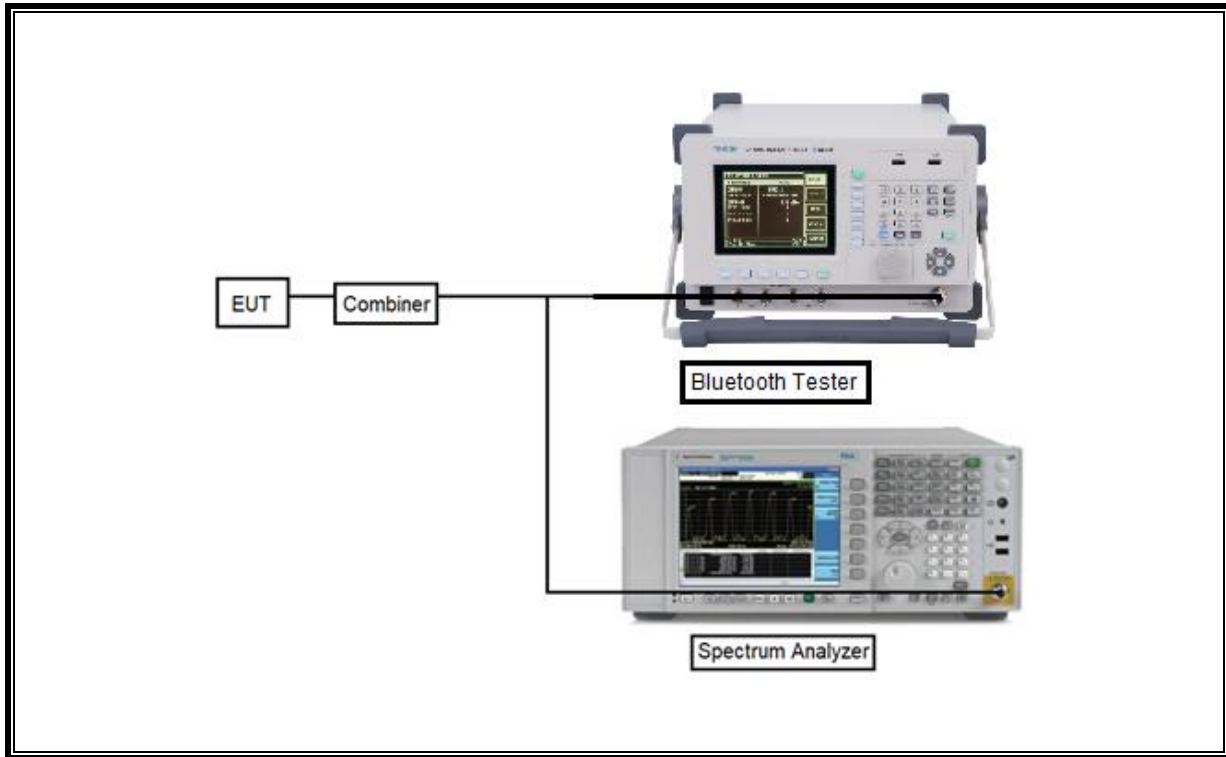

**SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)**

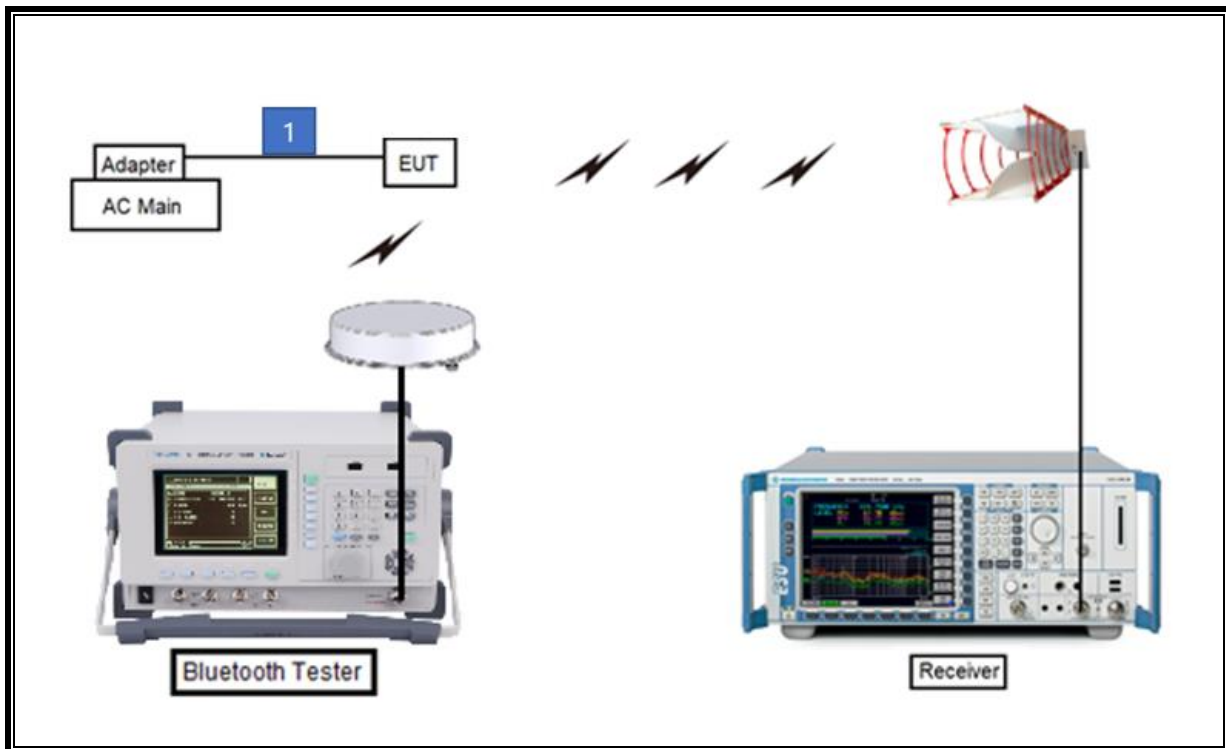

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-19-22
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	08-13-22
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-13-22
Antenna, Horn, 18 GHz	ETS	3115	00167211	07-27-22
Antenna, Horn, 18 GHz	ETS	3115	00161451	08-15-22
Antenna, Horn, 18 GHz	ETS	3117	00168724	07-27-22
Antenna, Horn, 18 GHz	ETS	3117	00168717	08-15-22
Antenna, Horn, 40 GHz	ETS	3116C	00166155	08-04-22
Antenna, Horn, 40 GHz	ETS	3116C	00168645	10-02-21
Preamplifier	ETS	3116C-PA	00168841	08-06-21
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-03-21
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-03-21
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-06-21
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-03-21
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-03-21
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-04-21
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-05-21
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-05-21
Spectrum Analyzer, 43.5 GHz	R&S	FSW43	104089	08-06-21
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-05-21
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	08-05-21
Power Splitter	MINI-CIRCUITS	WA1534	UL001	01-27-22
Attenuator	PASTERNAK	PE7087-10	A001	08-03-21
Attenuator	PASTERNAK	PE7087-10	A008	08-03-21
Attenuator	PASTERNAK	PE7004-10	2	08-04-21
Attenuator	PASTERNAK	PE7087-10	A009	08-03-21
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-03-21
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-03-21
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-03-21
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-03-21
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-03-21
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-04-21
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-03-21
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-03-21
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-04-21
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-03-21
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-03-21
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-04-21
LISN	R&S	ENV-216	101837	08-06-21
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-02-21
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

## 7. TEST RESULTS SUMMARY

FCC Part Section	IC Part Section	Test Description	Test Limit	Test Condition	Test Result
2.1051, 15.247(d)	RSS-247 5.5	Band Edge / Conducted Spurious Emission	-20 dBc	Conducted	PASS
15.247 (b)(1)	RSS-247 5.1(b)	TX conducted output power	< 21 dBm		PASS
15.247 (a)(1)	RSS-247 5.1(b)	Hopping frequency separation	> two-thirds of the 20 dB bandwidth		PASS
15.247 (a)(1)(iii)	RSS-247 5.1(d)	Number of Hopping channels	More than 15 non-overlapping channels		PASS
15.247 (a)(1)(iii)	RSS-247 5.1(d)	Avg Time of Occupancy	< 8 dBm		PASS
15.207(a)	RSS-GEN Clause 7.2 & 8.8	AC Power Line conducted emissions	Section 11	Power Line conducted	PASS
15.205, 15.209	RSS-GEN Clause 8.9 & 8.10	Radiated Spurious Emission	< 54dBuV/m(Av)	Radiated	PASS

## **8. MEASUREMENT METHODS**

20dB BW : ANSI C63.10, Section 6.9.2

99% BW : ANSI C63.10, Section 6.9.3

HOPPING FREQUENCY SEPARATION : ANSI C63.10, Section 7.8.2

NUMBER OF HOPPING CHANNELS : ANSI C63.10, Section 7.8.3

AVERAGE TIME OF OCCUPANCY : ANSI C63.10, Section 7.8.4

OUTPUT POWER : ANSI C63.10, Section 7.8.5.

Out-of-band EMISSIONS (Conducted) : ANSI C63.10, Section 7.8.6, 7.8.8

Out-of-band EMISSIONS IN NON-RESTRICTED BANDS: ANSI C63.10, Section 6.

Out-of-band EMISSIONS IN RESTRICTED BANDS : ANSI C63.10, Section 6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.



## 9. ANTENNA PORT TEST RESULTS

### 9.1. ON TIME AND DUTY CYCLE

#### LIMITS


None; for reporting purposes only.

#### PROCEDURE

ANSI C63.10, Section 11.6 : Zero-Span Spectrum Analyzer Method.

#### ON TIME AND DUTY CYCLE RESULTS

Mode	On time [msec]	Period [msec]	Duty Cycle [%]	Duty Cycle Correction Factor[dB]	1/T Minimum VBW [kHz]
<b>2 400 ~ 2 483.5 MHz Band</b>					
Bluetooth	2.890	3.749	77.09	1.13	0.35

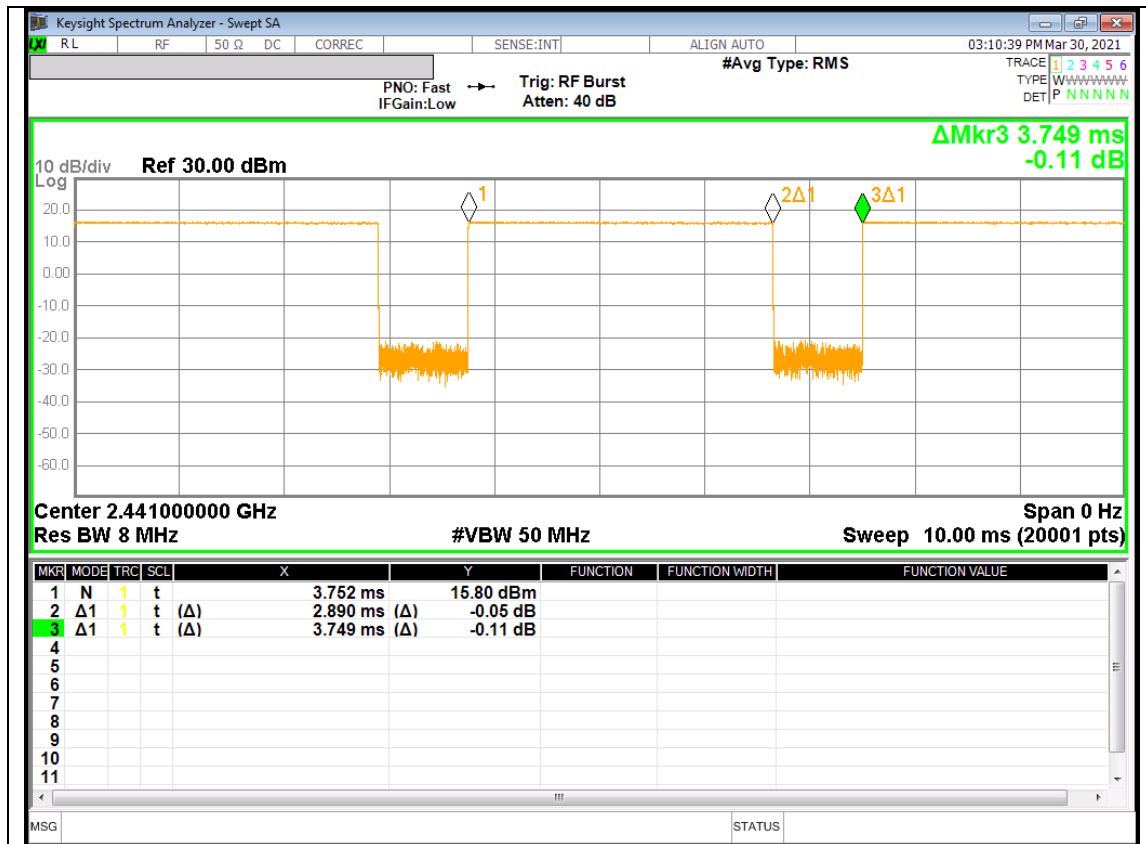

## 9.2. 20 dB AND 99% BANDWIDTH

### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

### RESULTS


#### 9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	20 dB Bandwidth [kHz]	99% Bandwidth [kHz]
0	2 402	782.8	810.6
39	2 441	823.5	811.6
78	2 480	828.3	814.5


#### 9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency [MHz]	20 dB Bandwidth [kHz]	99% Bandwidth [kHz]
0	2 402	1202.5	1136.4
39	2 441	1204.8	1139.6
78	2 480	1205.8	1135.2


- BDR

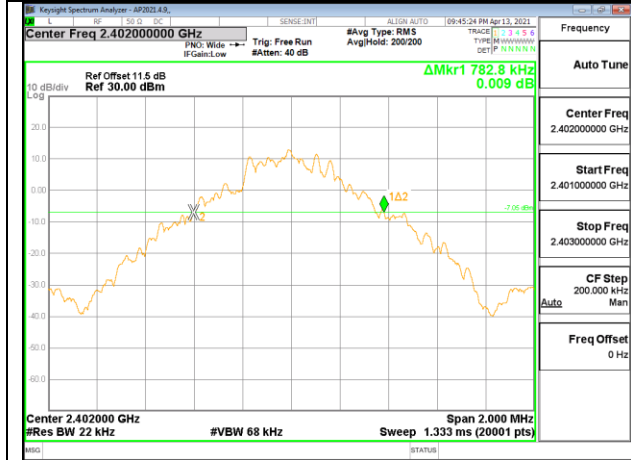


20 dB bandwidth / 0 CHANNEL

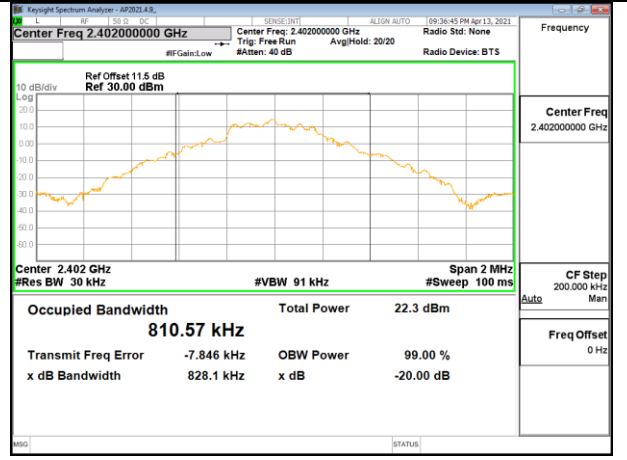


99% bandwidth / 0 CHANNEL

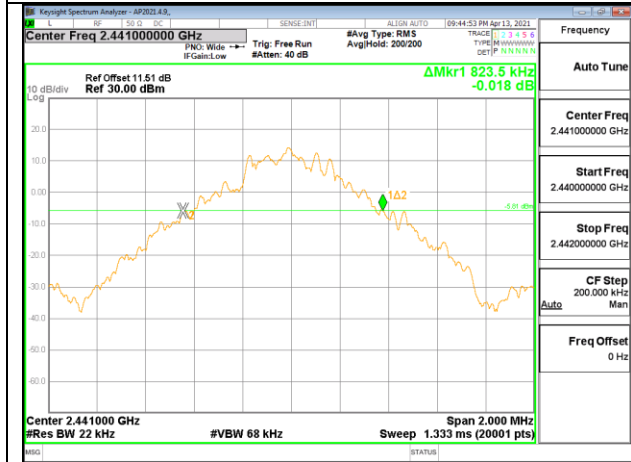


20 dB bandwidth / 39 CHANNEL

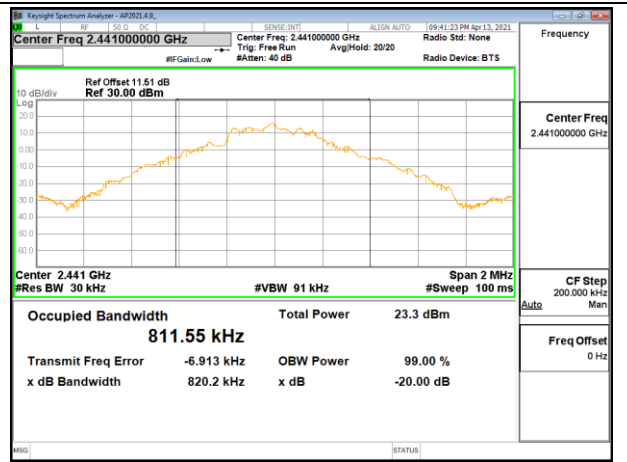

99% bandwidth / 39 CHANNEL

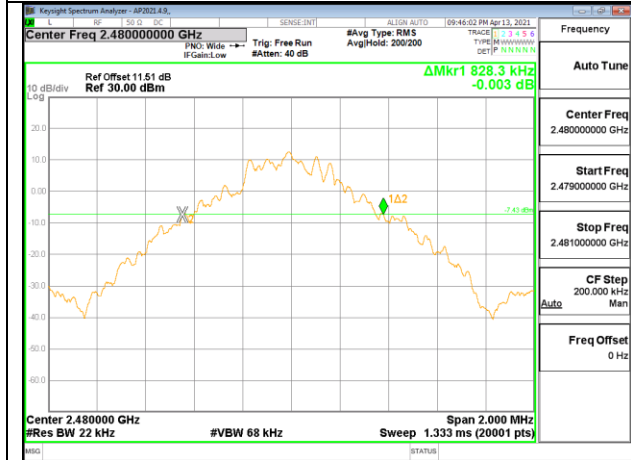


20 dB bandwidth / 78 CHANNEL

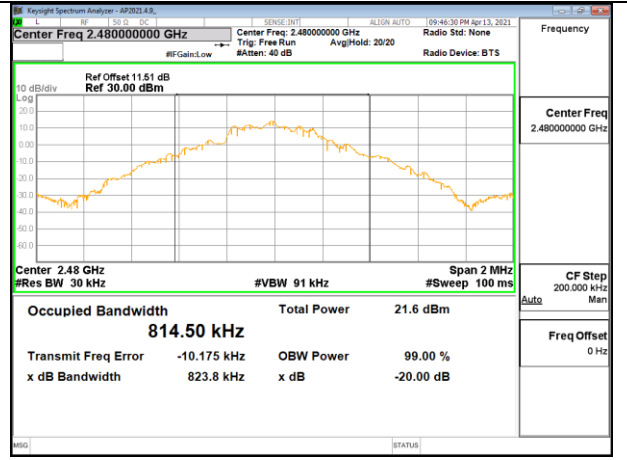


99% bandwidth / 78 CHANNEL

- EDR

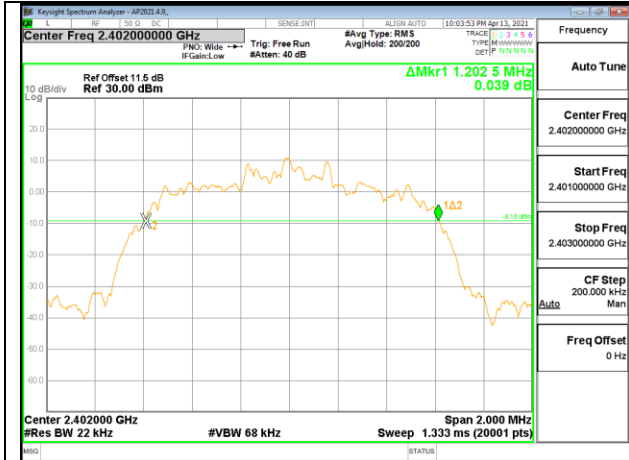


20 dB bandwidth / 0 CHANNEL

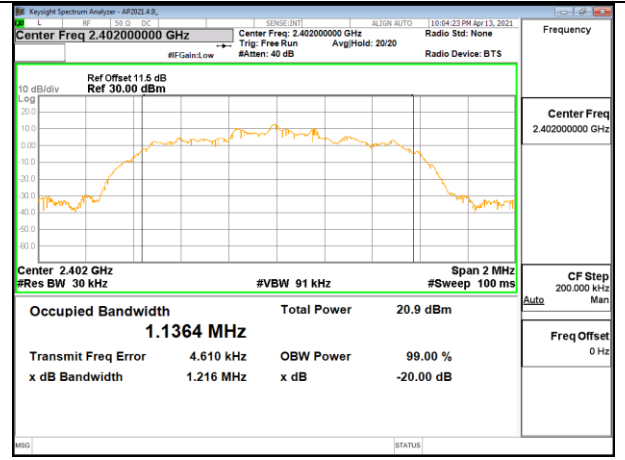


99% bandwidth / 0 CHANNEL




20 dB bandwidth / 39 CHANNEL

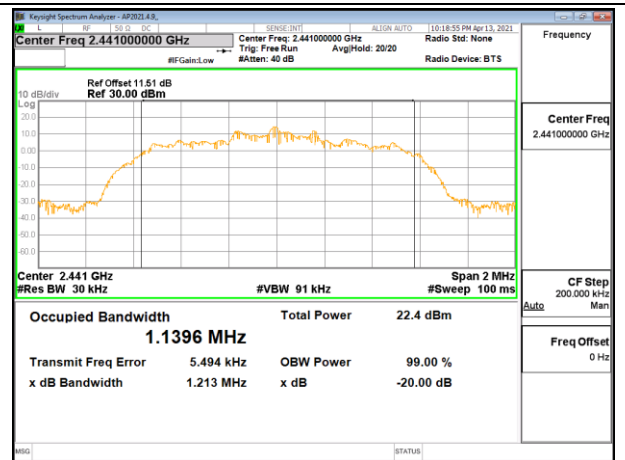

99% bandwidth / 39 CHANNEL

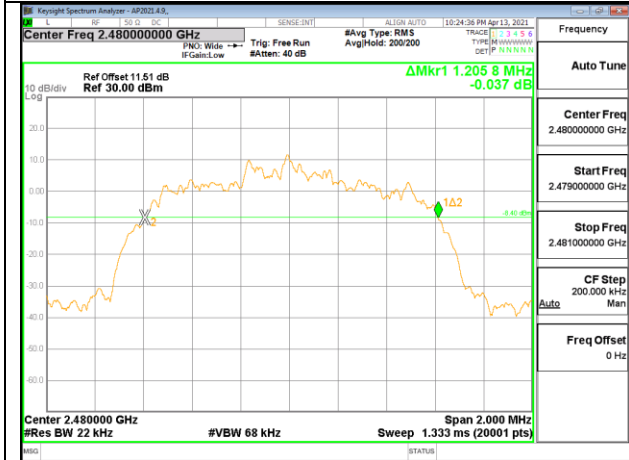

20 dB bandwidth / 78 CHANNEL

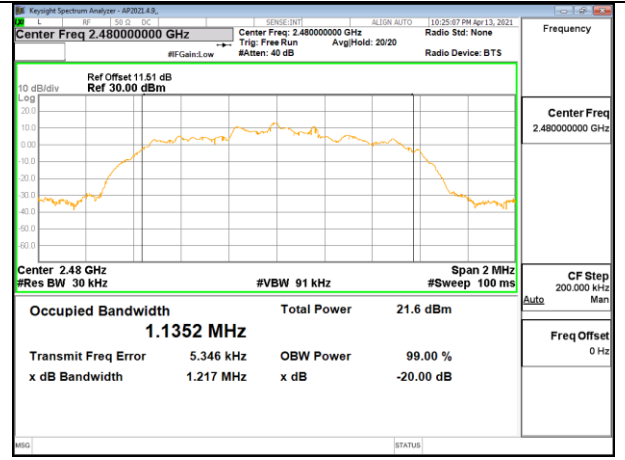

99% bandwidth / 78 CHANNEL

---

### **9.3. HOPPING FREQUENCY SEPARATION**

#### **LIMITS**

FCC §15.247 (a) (1)

RSS-247 (5.1) (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to  $VBW \geq RBW$ . The sweep time is coupled.


#### **RESULTS**

### 9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

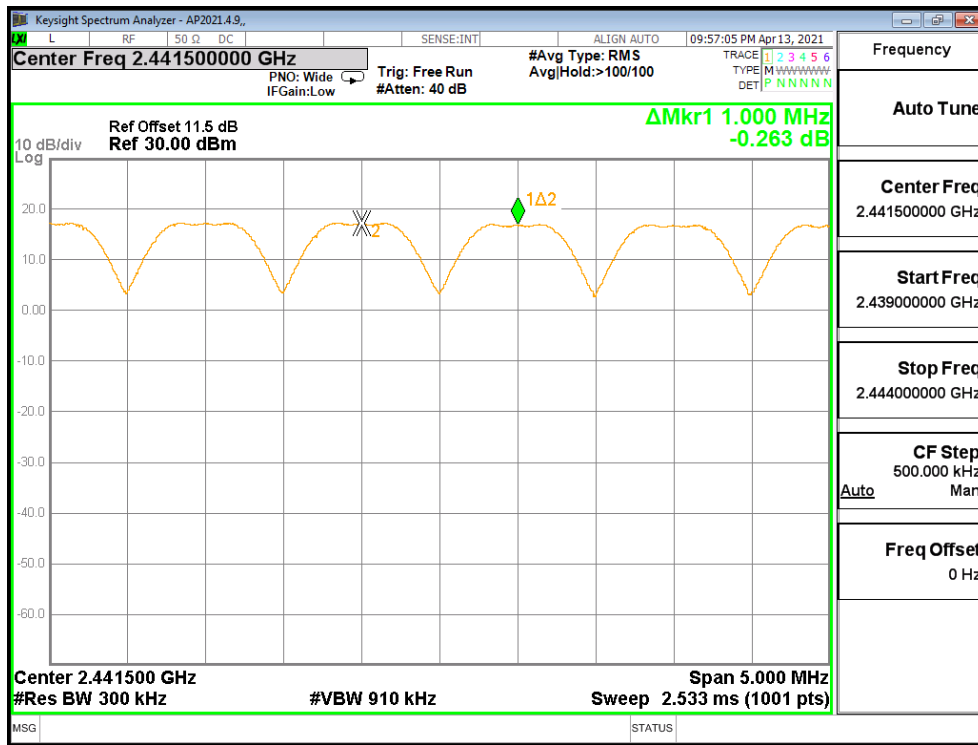

HOPPING FREQUENCY SEPARATION PLOT

### 9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

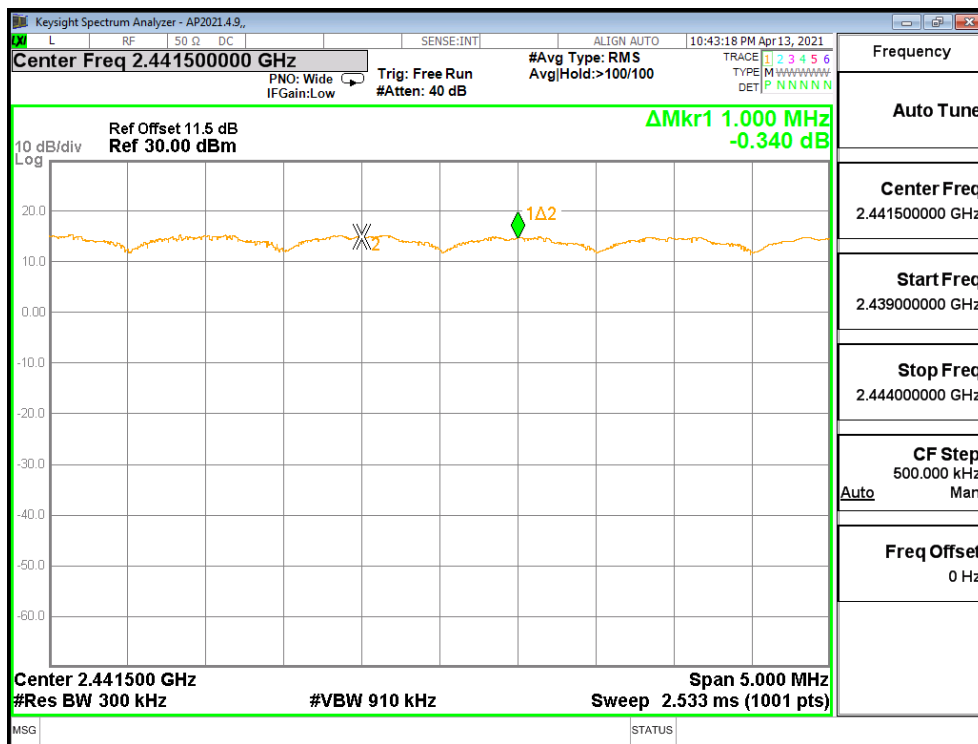

HOPPING FREQUENCY SEPARATION PLOT

---

## **9.4. NUMBER OF HOPPING CHANNELS**

### **LIMITS**

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


### **RESULTS**

Normal Mode: All Channels Observed


### 9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

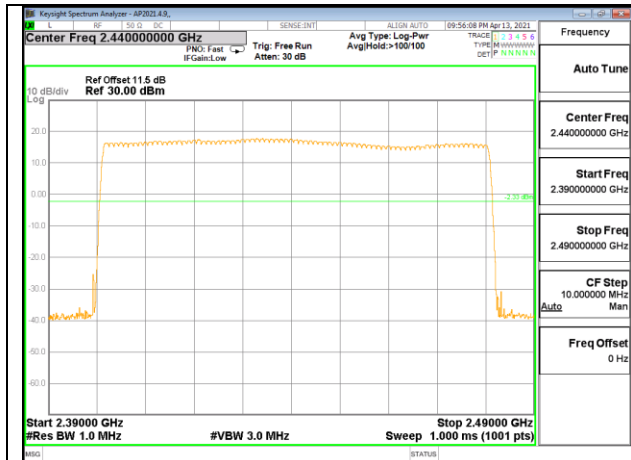


100 MHz Span

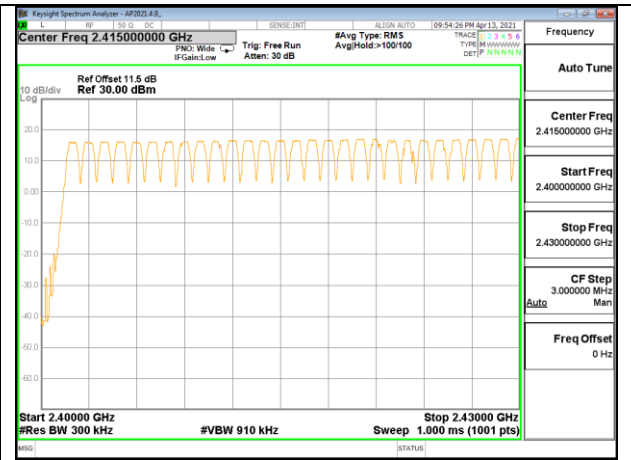

30MHz SPAN, SEGMENT 1 OF 3

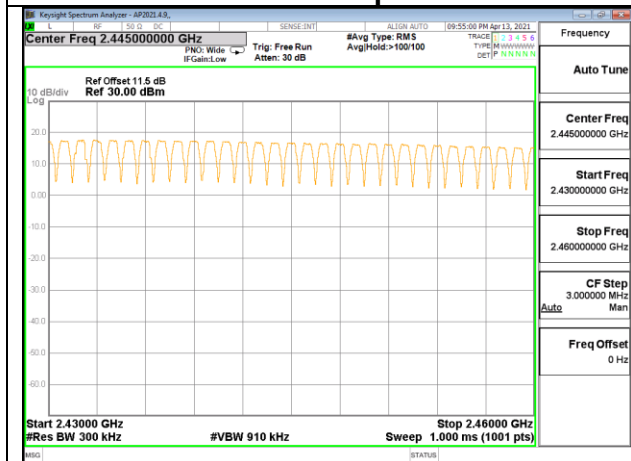


30MHz SPAN, SEGMENT 2 OF 3

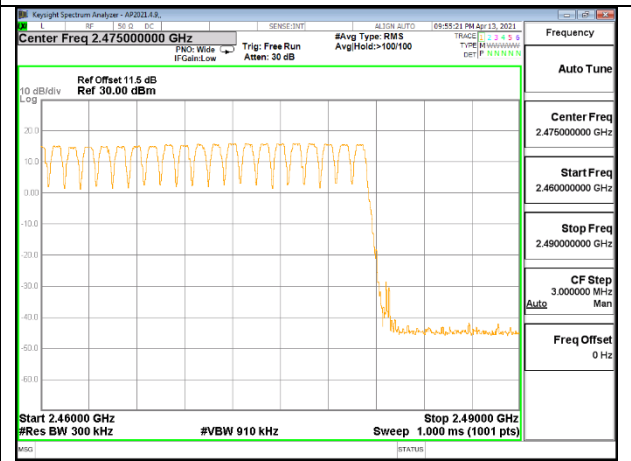


30MHz SPAN, SEGMENT 3 OF 3




### 9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

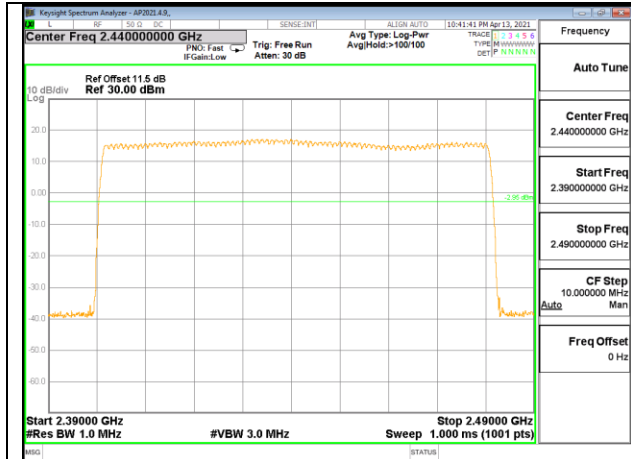


100 MHz Span

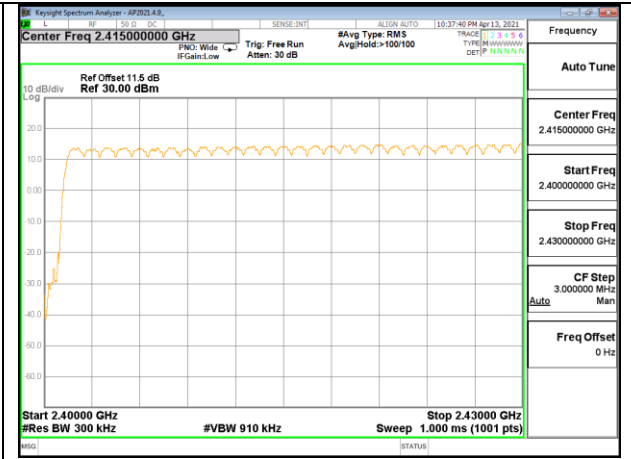

30MHz SPAN, SEGMENT 1 OF 3

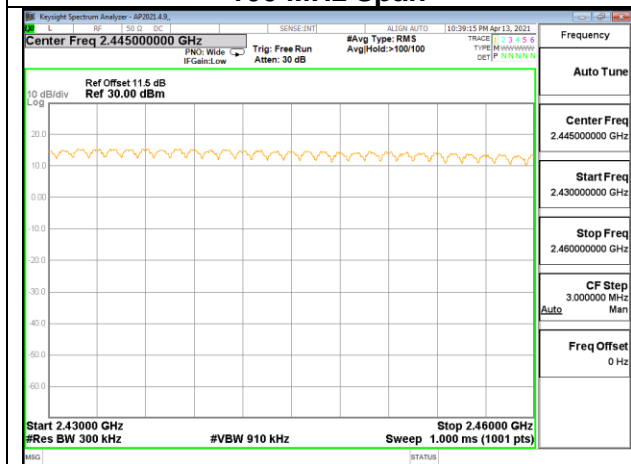

30MHz SPAN, SEGMENT 2 OF 3

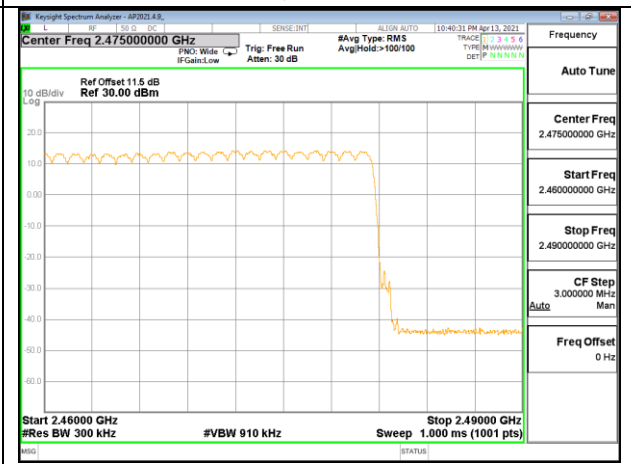

30MHz SPAN, SEGMENT 3 OF 3

---

## 9.5. AVERAGE TIME OF OCCUPANCY

### LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 3.16 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$ .

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels \* 0.4 seconds) is equal to  $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$ .


### RESULTS

### 9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK Normal					
DH1	0.386	32	0.123520	0.4	-0.2765
DH3	1.638	16	0.262080	0.4	-0.1379
DH5	2.884	11	0.317240	0.4	-0.0828
GFSK AFH					
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK AFH					
DH1	0.386	8	0.030880	0.4	-0.3691
DH3	1.638	4	0.065520	0.4	-0.3345
DH5	2.884	2.75	0.079310	0.4	-0.3207

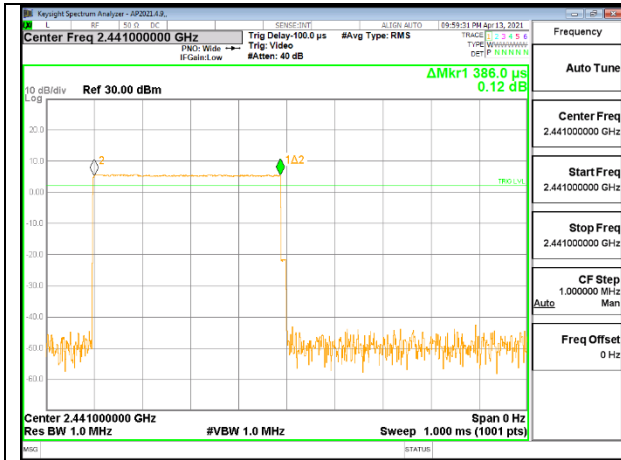


**PULSE WIDTH – DH1**

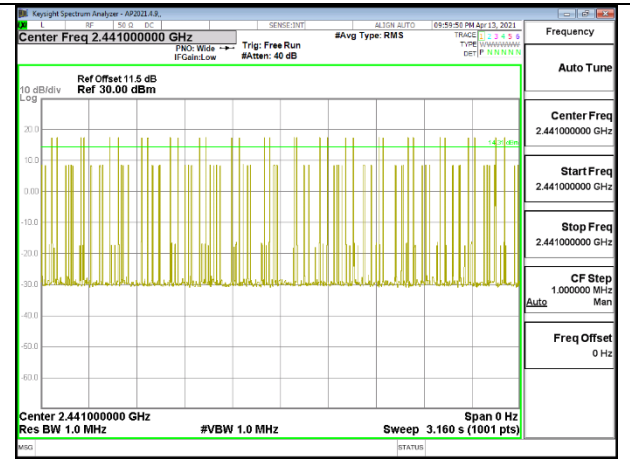

**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1**




**PULSE WIDTH – DH3**

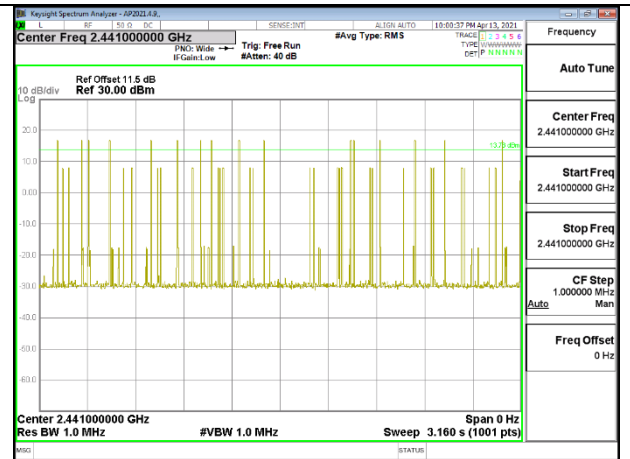

**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3**




**PULSE WIDTH – DH5**

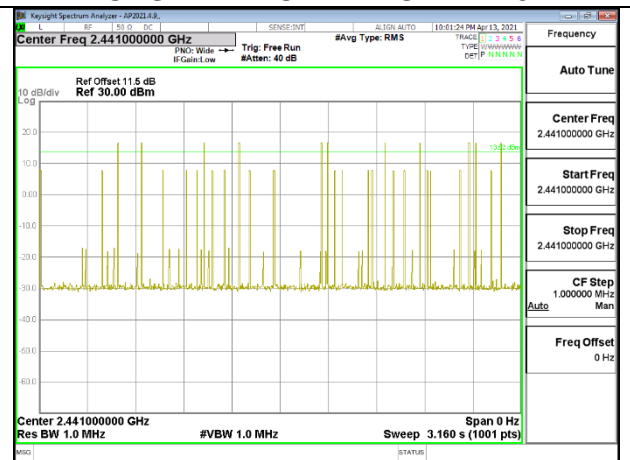


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5**

### 9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION


DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8PSK Normal					
DH1	0.390	31	0.120900	0.4	-0.2791
DH3	1.640	18	0.295200	0.4	-0.1048
DH5	2.884	10	0.288400	0.4	-0.1116
8PSK AFH					
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8PSK AFH					
DH1	0.390	7.75	0.030225	0.4	-0.3698
DH3	1.640	4.5	0.073800	0.4	-0.3262
DH5	2.884	2.5	0.072100	0.4	-0.3279

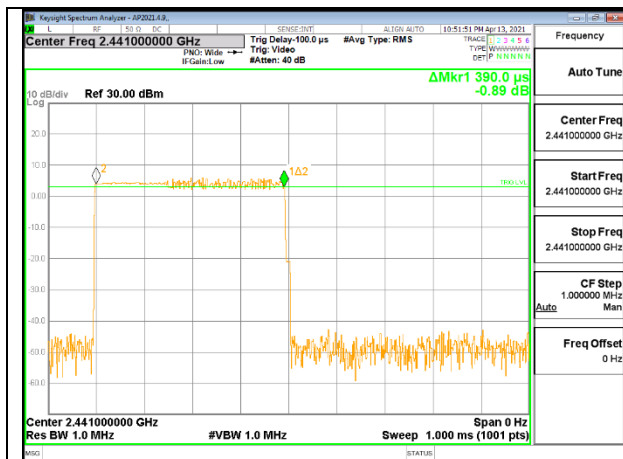


**PULSE WIDTH – 3-DH1**

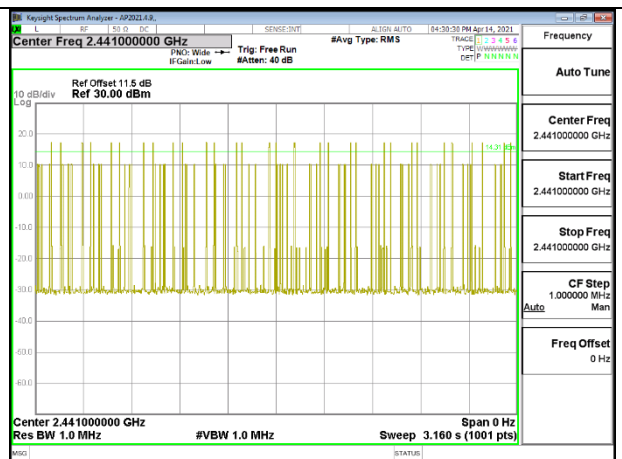


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3-DH1**

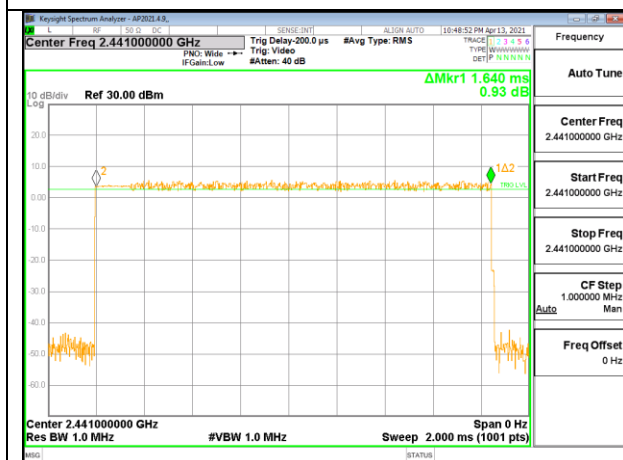


**PULSE WIDTH – 3-DH3**

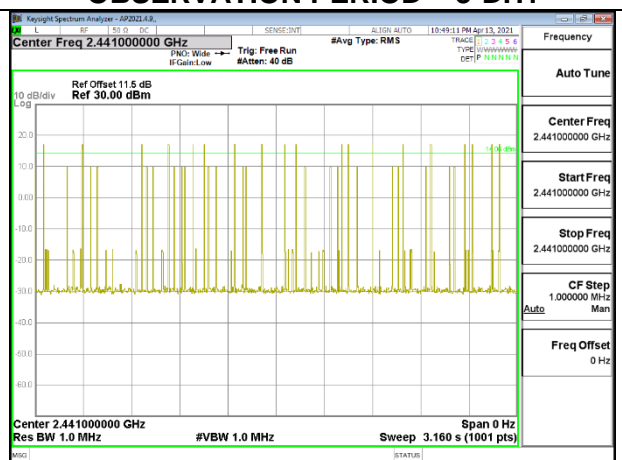

**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3-DH3**

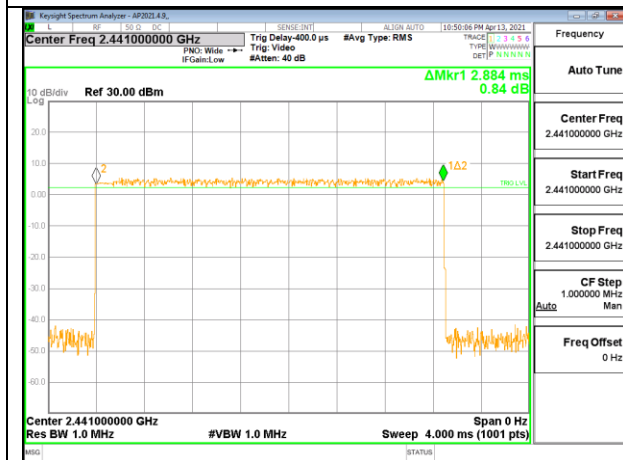

**PULSE WIDTH – 3-DH5**

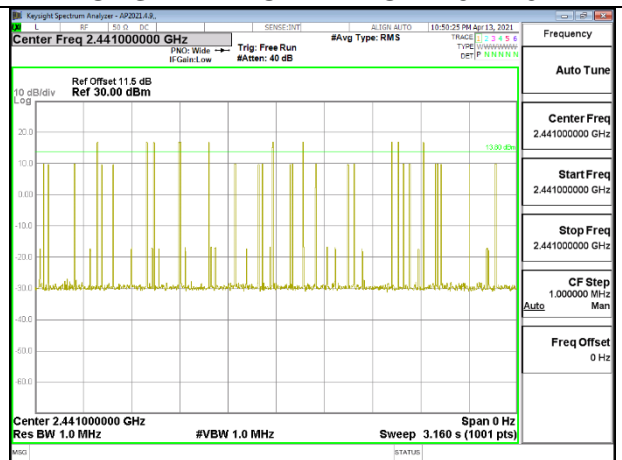

**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3-DH5**

## 9.6. OUTPUT POWER

### LIMITS

§15.247 (b) (1)

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

### RESULTS

#### 9.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2 402	16.464	21.000	-4.536
Mid	2 441	<b>17.696</b>	<b>21.000</b>	<b>-3.304</b>
High	2 480	16.300	21.000	-4.700
Worst		17.696	21.000	-3.304

#### 9.6.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION


Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2 402	16.094	21.000	-4.906
Mid	2 441	<b>17.893</b>	<b>21.000</b>	<b>-3.107</b>
High	2 480	16.871	21.000	-4.129
Worst		17.893	21.000	-3.107

#### 9.6.3. ENHANCED DATA RATE 8PSK MODULATION


Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2 402	16.691	21.000	-4.309
Mid	2 441	<b>18.517</b>	<b>21.000</b>	<b>-2.483</b>
High	2 480	17.570	21.000	-3.430
Worst		18.517	21.000	-2.483

### 9.6.4. OUTPUT POWER PLOTS

#### PEAK OUTPUT POWER

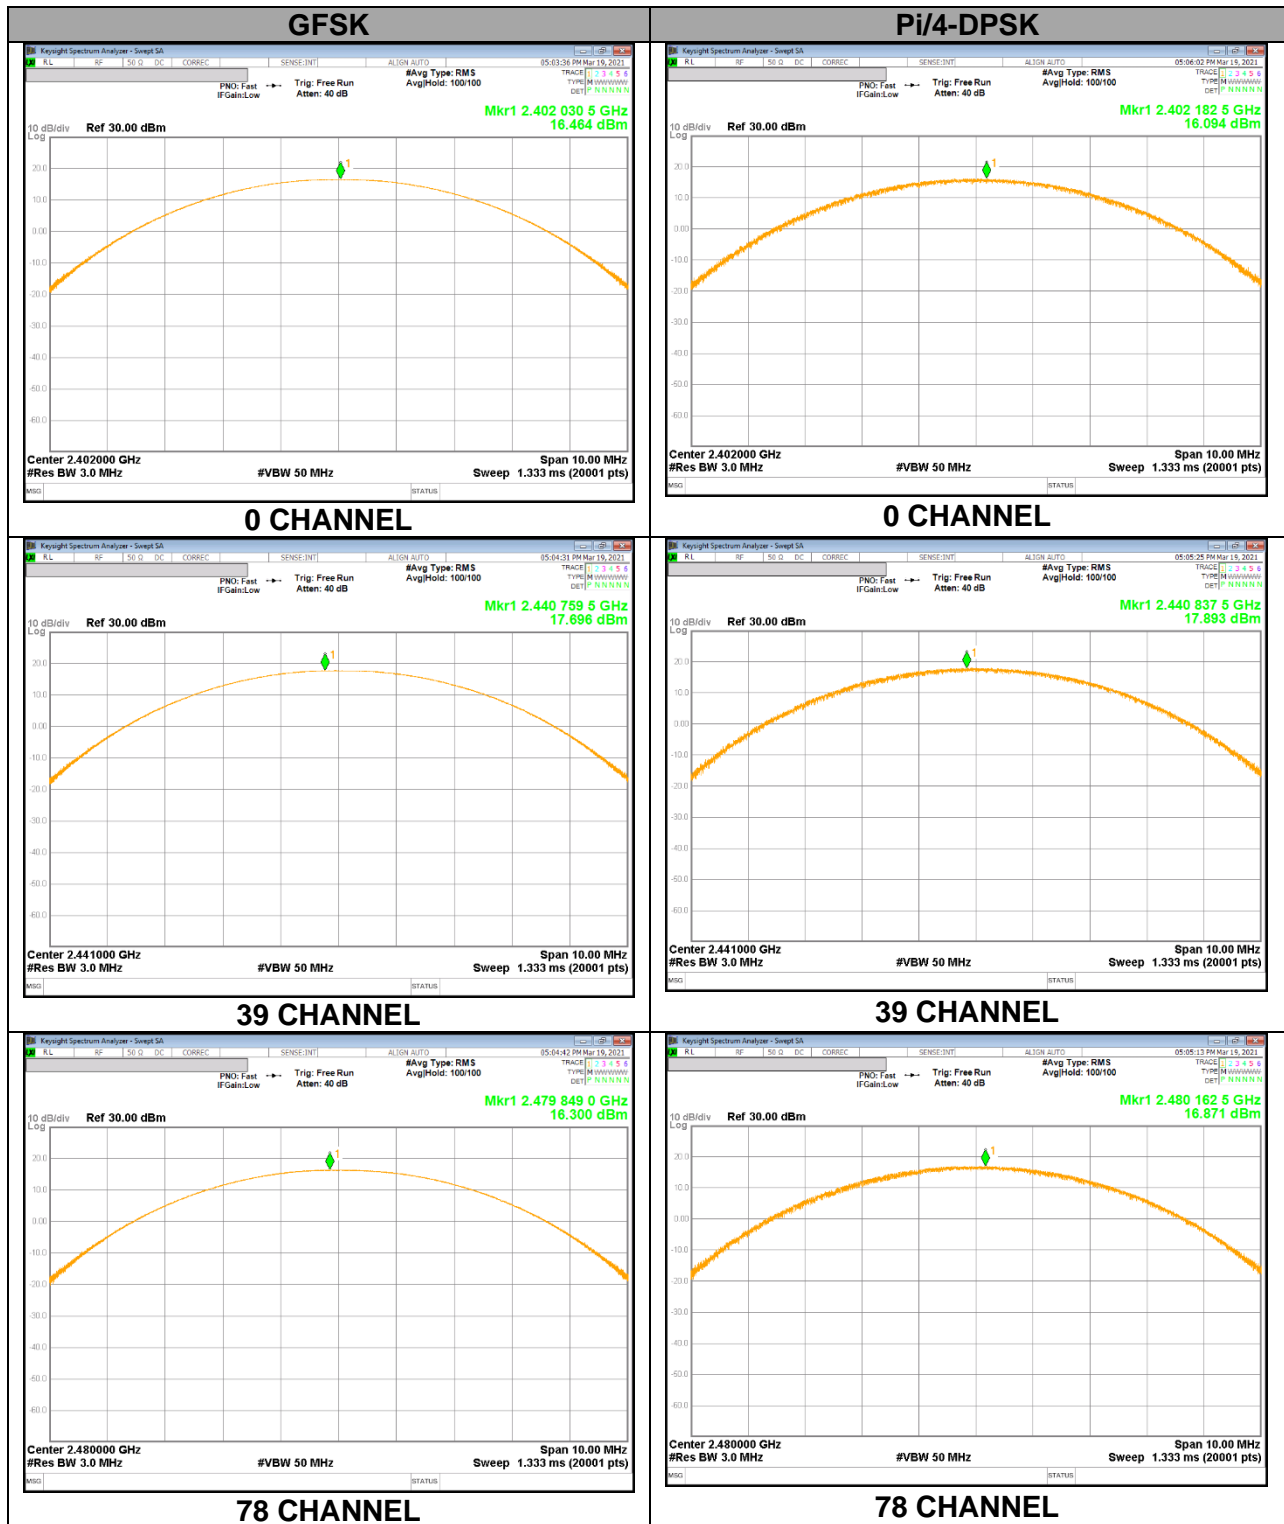



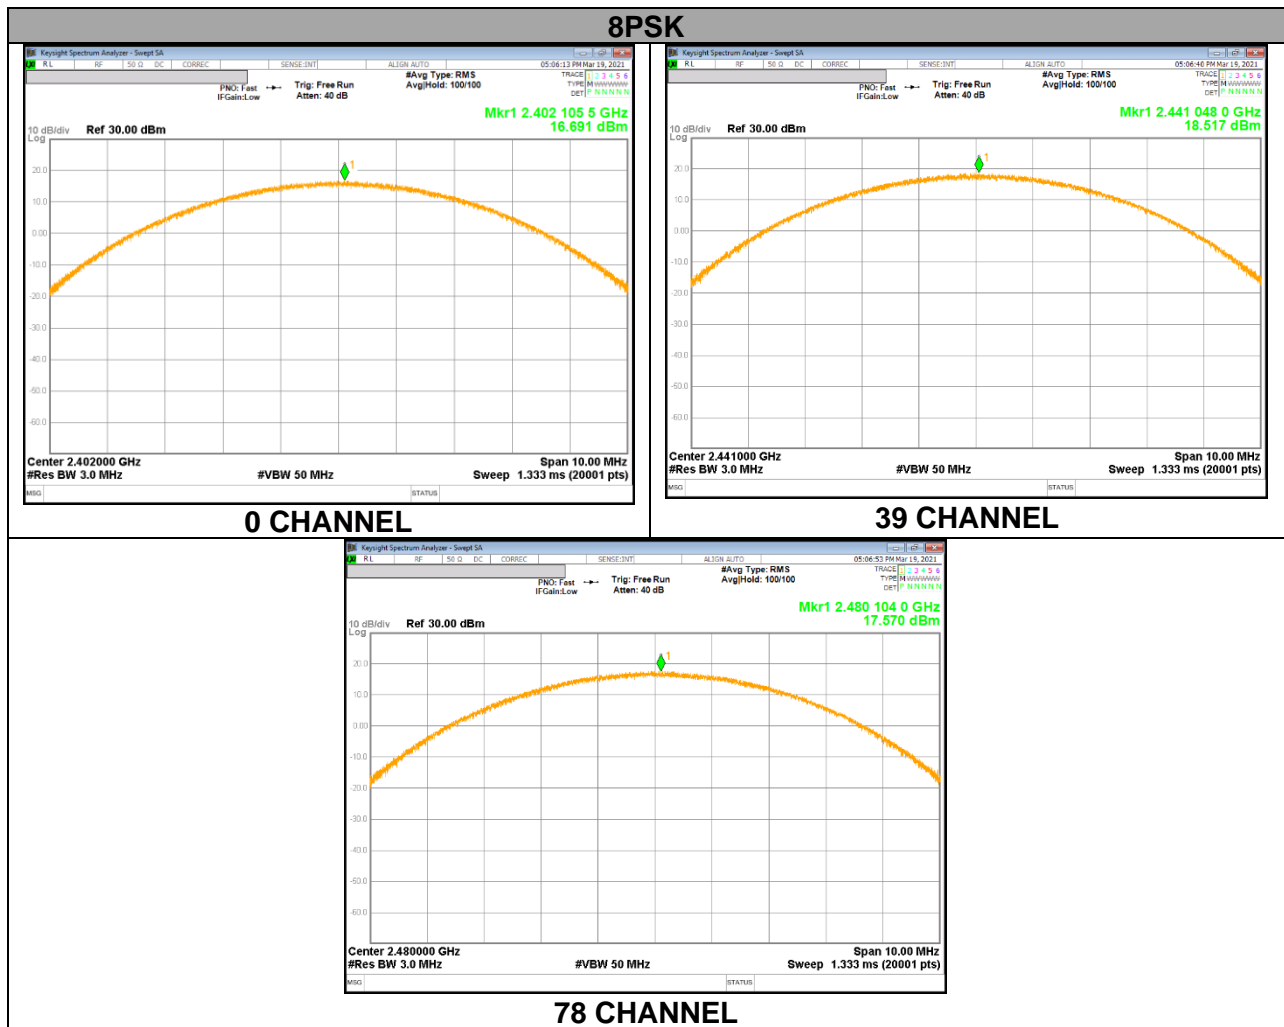

## 9.7. AVERAGE POWER

### LIMITS

None; for reporting purposes only

### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.  
 The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

### RESULTS

#### 9.7.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2 402	15.990	39.719
Middle	2 441	<b>17.261</b>	<b>53.223</b>
High	2 480	15.855	38.503

#### 9.7.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2 402	13.567	22.735
Middle	2 441	<b>15.450</b>	<b>35.075</b>
High	2 480	14.413	27.625

#### 9.7.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2 402	13.573	22.767
Middle	2 441	<b>15.473</b>	<b>35.261</b>
High	2 480	14.441	27.804

## **9.8. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

Limit = -20 dBc

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The band-edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


### **RESULTS**

## 9.8.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

### SPURIOUS EMISSIONS, NON-HOPPING

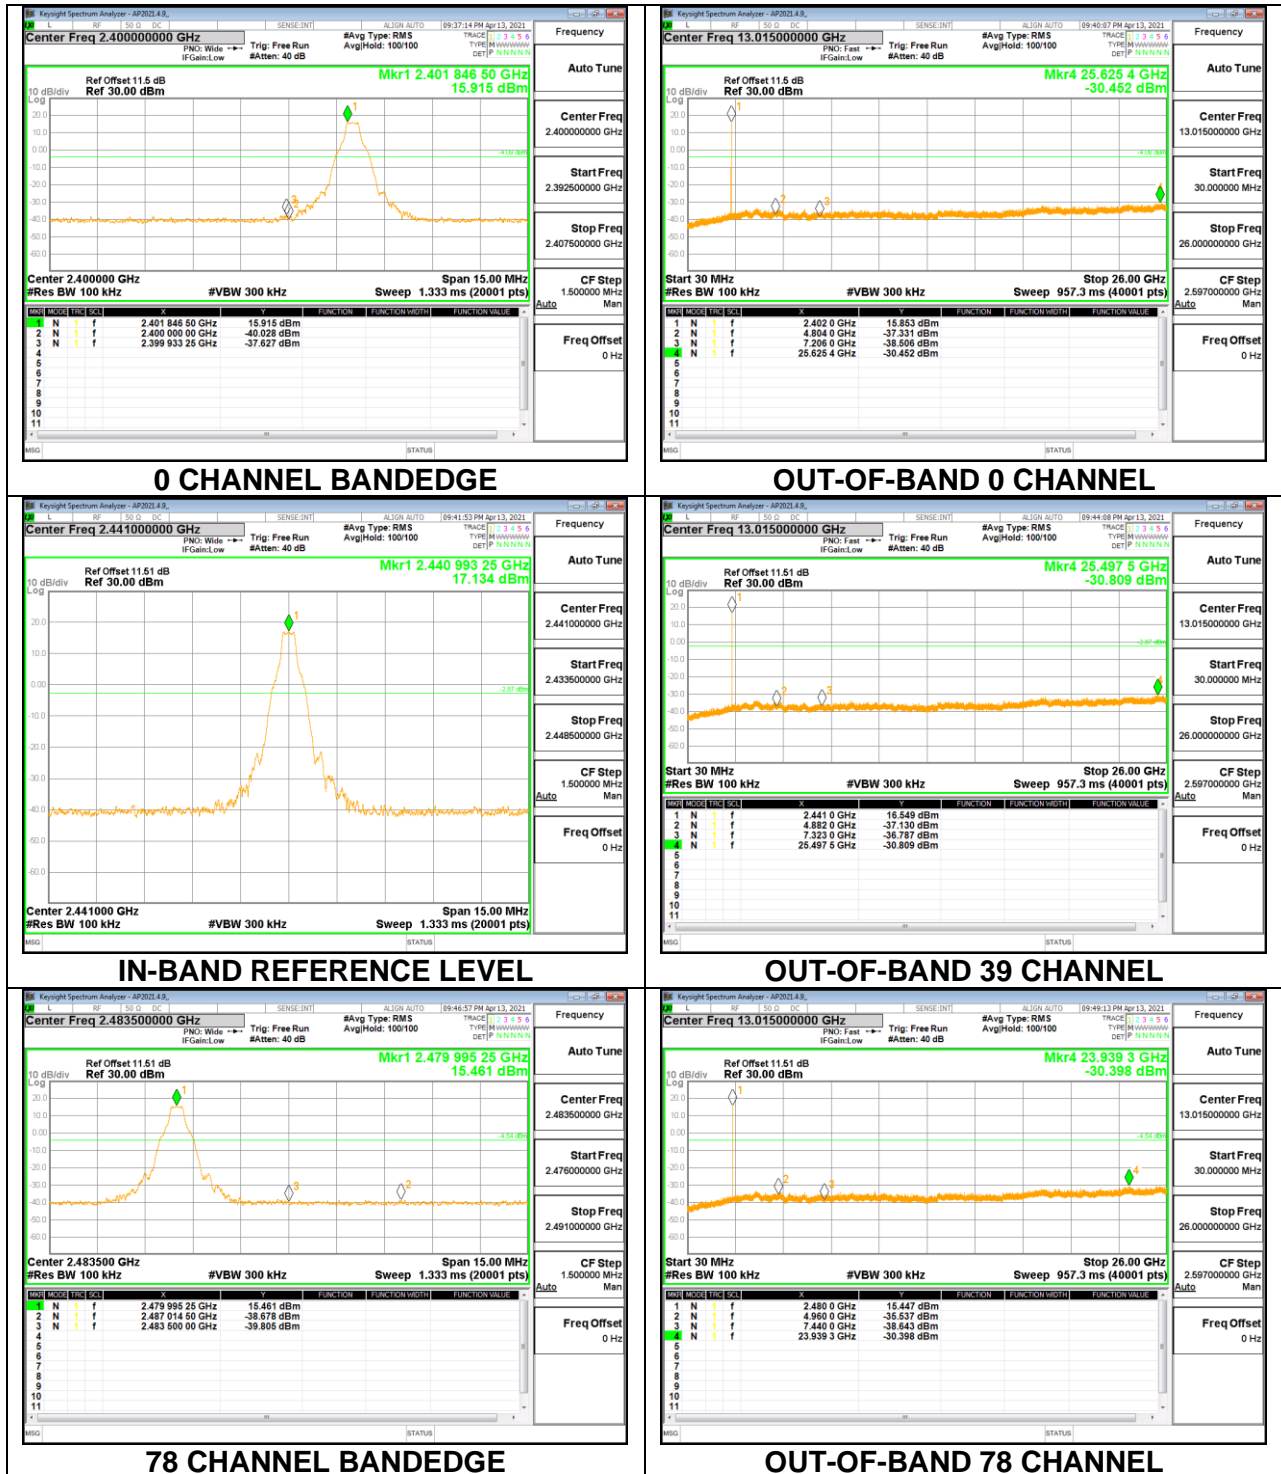


**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

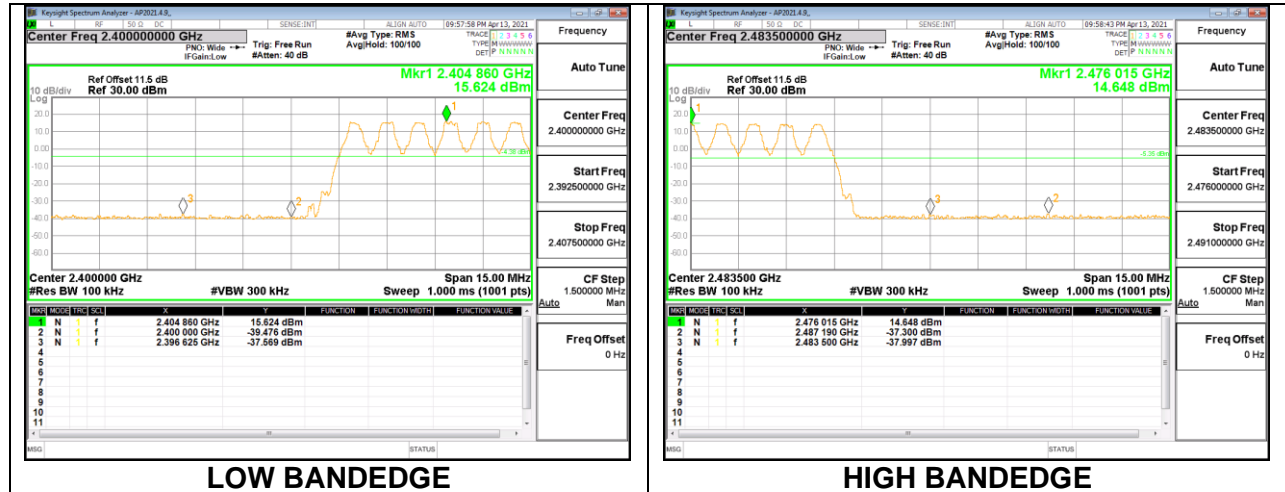


## 9.8.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

### SPURIOUS EMISSIONS, NON-HOPPING

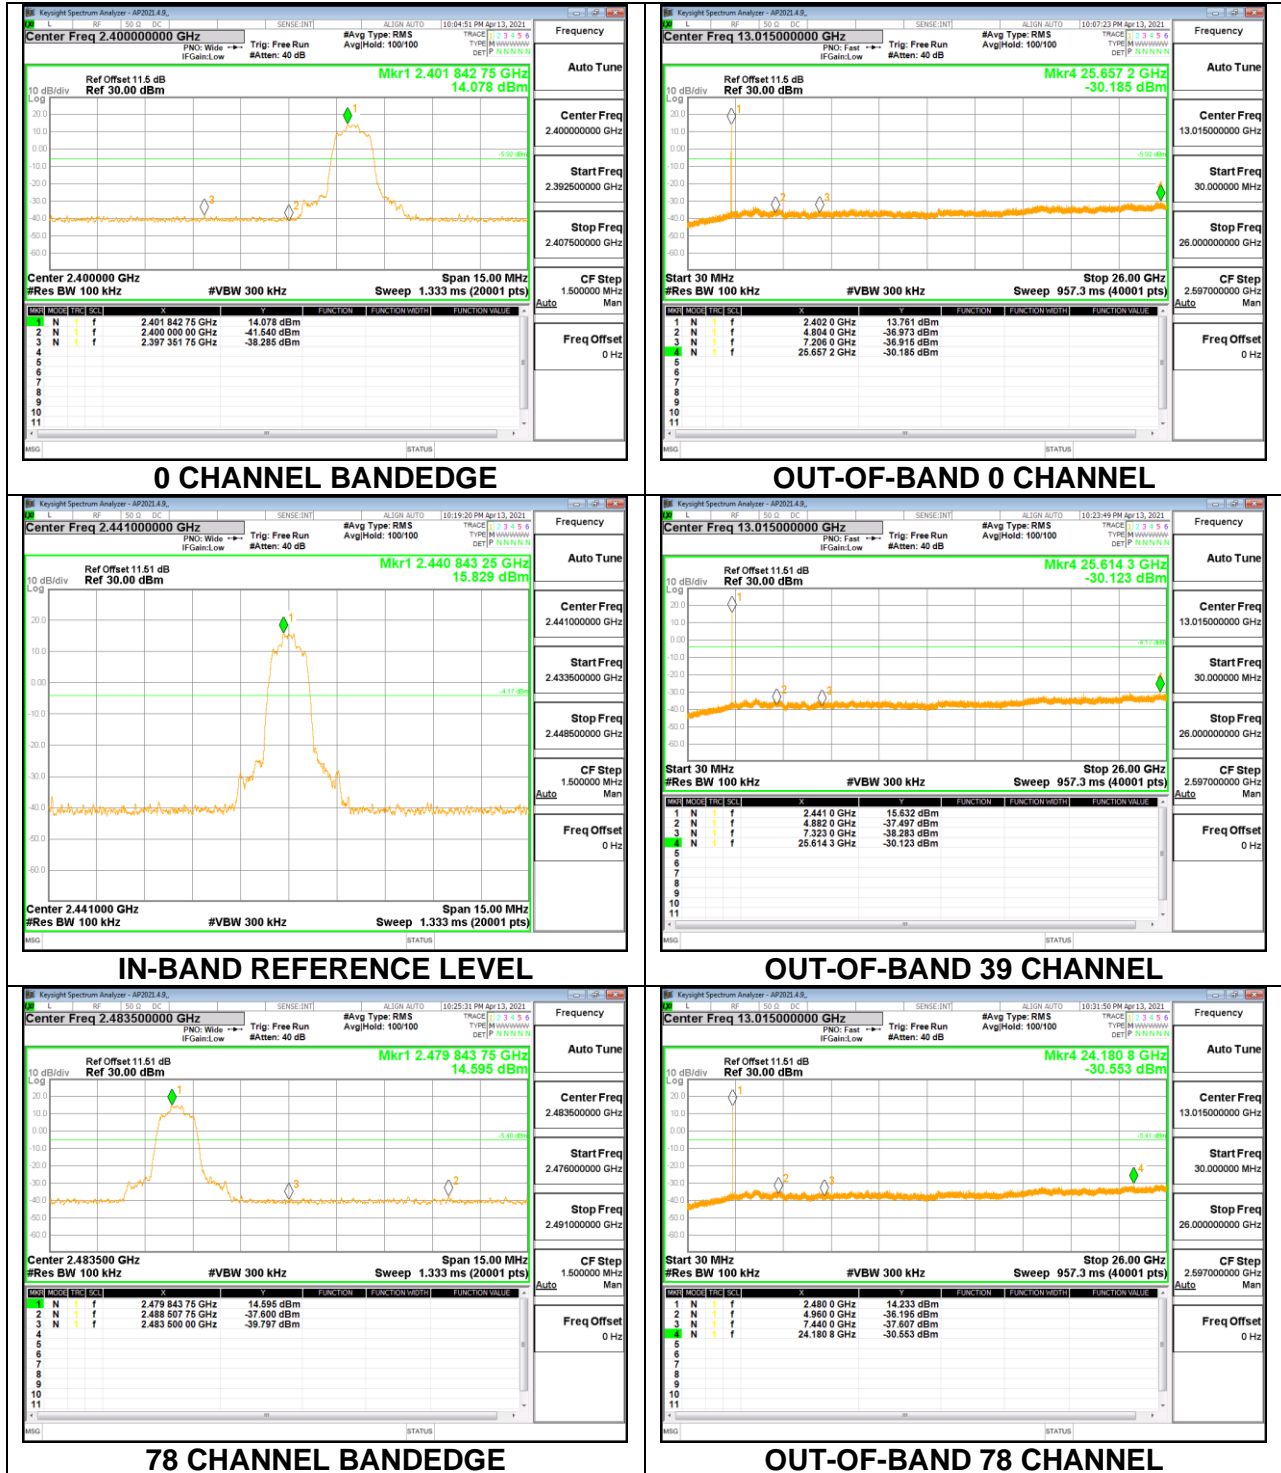

**SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON**

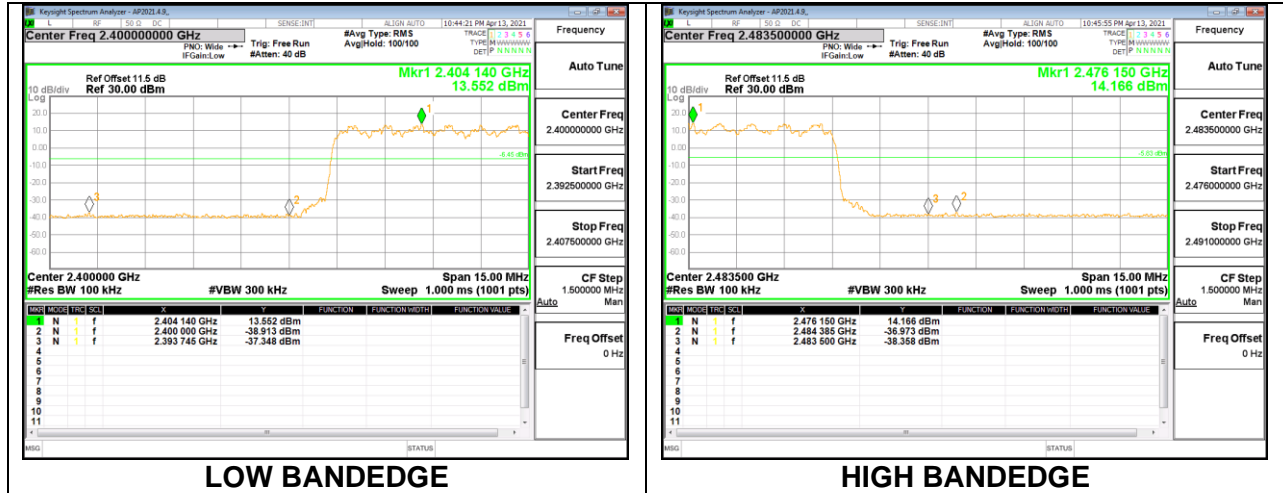

## 10. RADIATED TEST RESULTS

### LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

FCC Part 15.205 (a) : Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	MHz	GHz	GHz
0.009 – 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 – 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	162.0125 ~	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	167.17	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	167.72 ~ 173.2	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	240 ~ 285	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	322 ~ 335.4	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	399.90 ~ 410	3345.8 ~ 3358		
		608 ~ 614	3600 ~ 4400		
		960 ~ 1240			

▪ FCC Part 15.205(b) : The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.



## TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements.(Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.)

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1/T (on time) for average measurement.

$$\text{GFSK} = 1/T = 1 / 0.00289\text{s} = 346\text{Hz}.$$

The minimum VBW was 346Hz, but test receiver(ESU40) couldn't set value 347Hz. Due to this reason, testing VBW was set to 500Hz(Worst cases).

The spectrum from 1GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.  
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9kHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).  
Per FCC part 15.31(o), test results were not reported.


Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open are test site.  
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.

## 10.1. TRANSMITTER ABOVE 1 GHz

### 10.1.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

#### BANDEDGE (0 CHANNEL)

#### HORIZONTAL RESULT

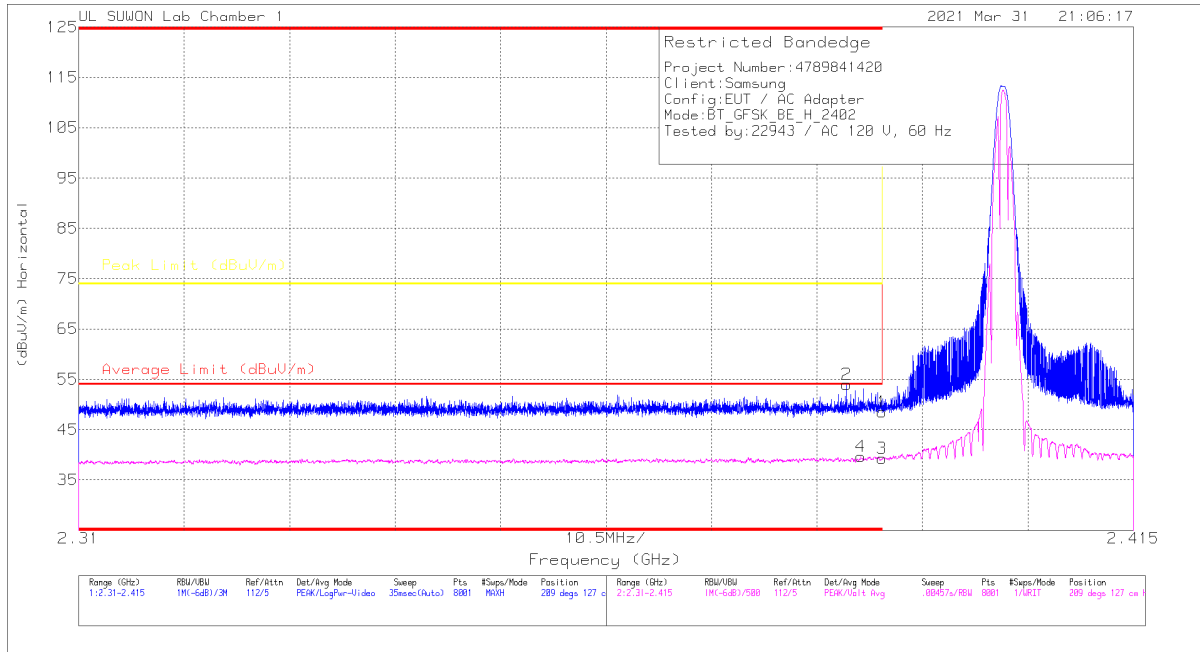

#### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.32	Pk	31.8	-25.6	48.52	-	-	74	-25.48	209	127	H
2	* 2.38645	47.83	Pk	31.8	-25.6	54.03	-	-	74	-19.97	209	127	H
3	* 2.39	33.04	VA1T	31.8	-25.6	39.24	54	-14.76	-	-	209	127	H
4	* 2.38786	33.31	VA1T	31.8	-25.5	39.61	54	-14.39	-	-	209	127	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average  $V_B=1/T_{on}$  where:  $T_{on}$  is transmit duration

### VERTICAL RESULT

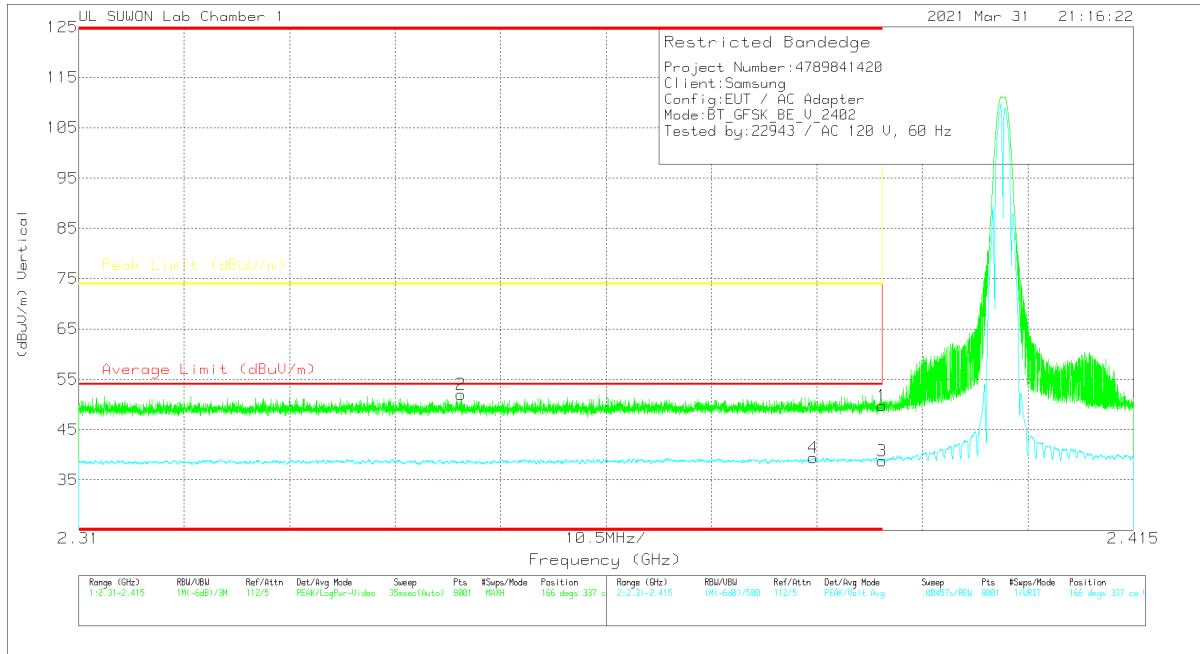


### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.58	Pk	31.8	-25.6	49.78	-	-	74	-24.22	166	337	V
2	* 2.34802	45.98	Pk	31.7	-25.7	51.98	-	-	74	-22.02	166	337	V
3	* 2.39	32.57	VA1T	31.8	-25.6	38.77	54	-15.23	-	-	166	337	V
4	* 2.38309	33.13	VA1T	31.8	-25.5	39.43	54	-14.57	-	-	166	337	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

**BANDEDGE (78 CHANNEL)**

**HORIZONTAL RESULT**

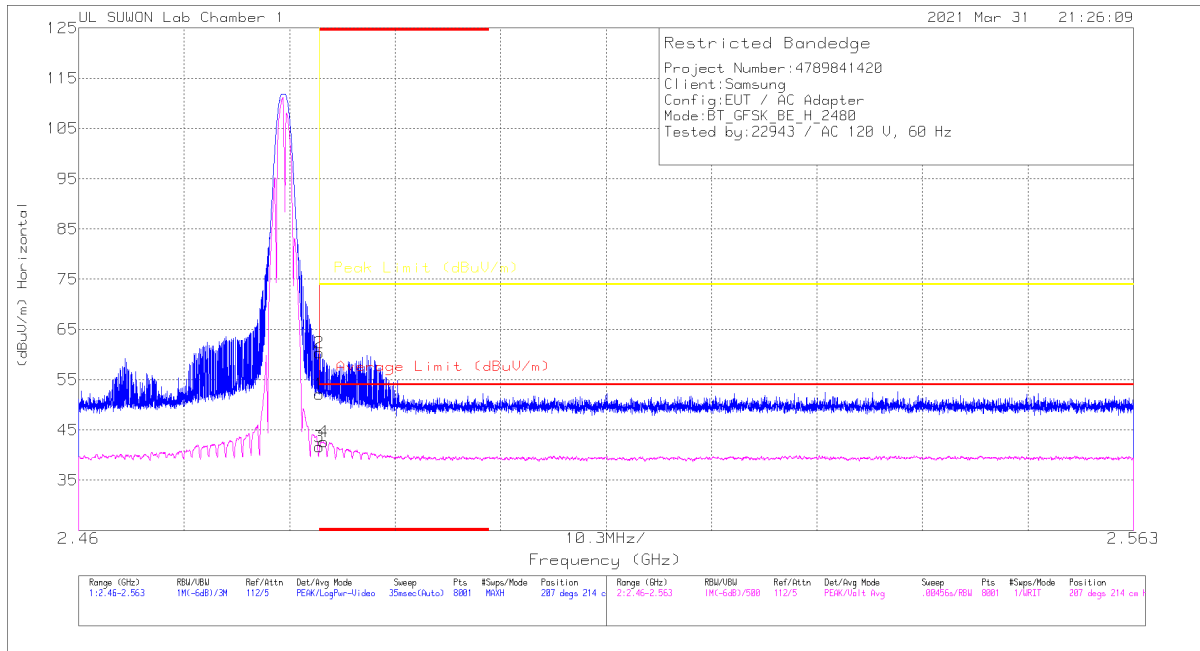


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	45.48	Pk	32	-25.3	52.18	-	-	74	-21.82	207	214	H
2	* 2.48352	53.66	PK	32	-25.3	60.36	-	-	74	-13.64	207	214	H
3	* 2.48351	34.9	VA1T	32	-25.3	41.6	54	-12.4	-	-	207	214	H
4	* 2.48391	35.99	VA1T	32	-25.3	42.69	54	-11.31	-	-	207	214	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

### VERTICAL RESULT

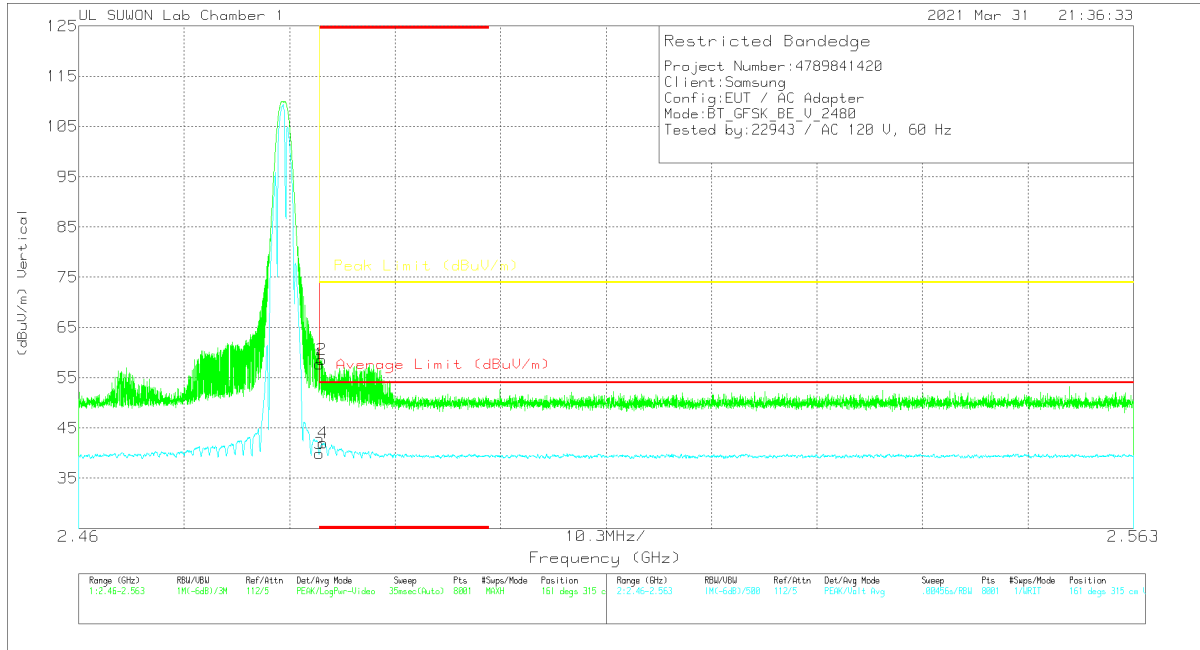


### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	50.98	Pk	32	-25.3	57.68	-	-	74	-16.32	161	315	V
2	* 2.48375	51.88	Pk	32	-25.3	58.58	-	-	74	-15.42	161	315	V
3	* 2.48351	33.22	VA1T	32	-25.3	39.92	54	-14.08	-	-	161	315	V
4	* 2.48387	35.3	VA1T	32	-25.3	42	54	-12	-	-	161	315	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

# HARMONICS AND SPURIOUS EMISSIONS

## 0 CHANNEL RESULTS

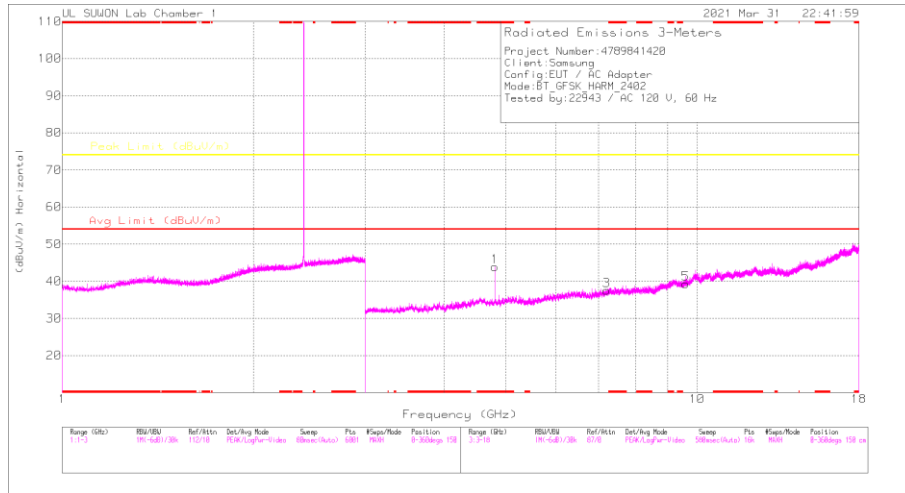

## HORIZONTAL

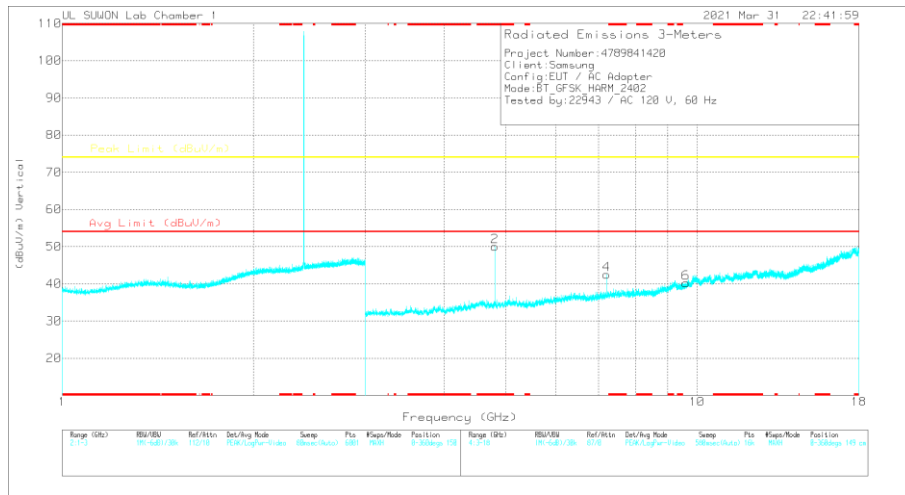


## VERTICAL

## RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0016871 7	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.80378	46.12	PKFH	34.1	-31.5	48.72	-	-	74	-25.28	55	124	H
* 4.80402	41.29	VA1T	34.1	-31.5	43.89	54	-10.11	-	-	55	124	H
* 4.80424	48.47	PKFH	34.1	-31.5	51.07	-	-	74	-22.93	37	151	V
* 4.80402	44.57	VA1T	34.1	-31.5	47.17	54	-6.83	-	-	37	151	V
7.19936	36.95	PKFH	35.9	-27.7	45.15	-	-	74	-28.85	61	213	H
7.2066	39.4	PKFH	35.9	-27.6	47.7	-	-	74	-26.3	296	144	V
9.6108	33.6	PKFH	37.1	-23.1	47.6	-	-	74	-26.4	360	100	H
9.60695	32.98	PKFH	37.1	-23	47.08	-	-	74	-26.92	360	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

### 39 CHANNEL RESULTS

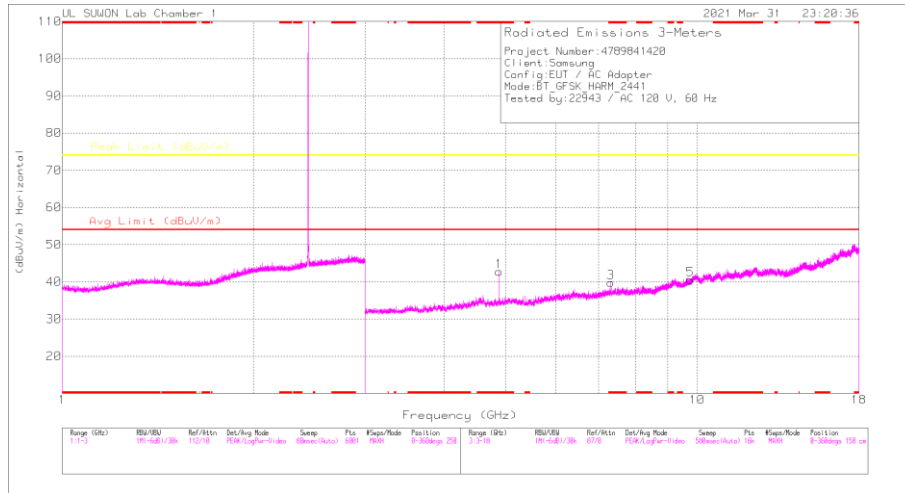

### HORIZONTAL

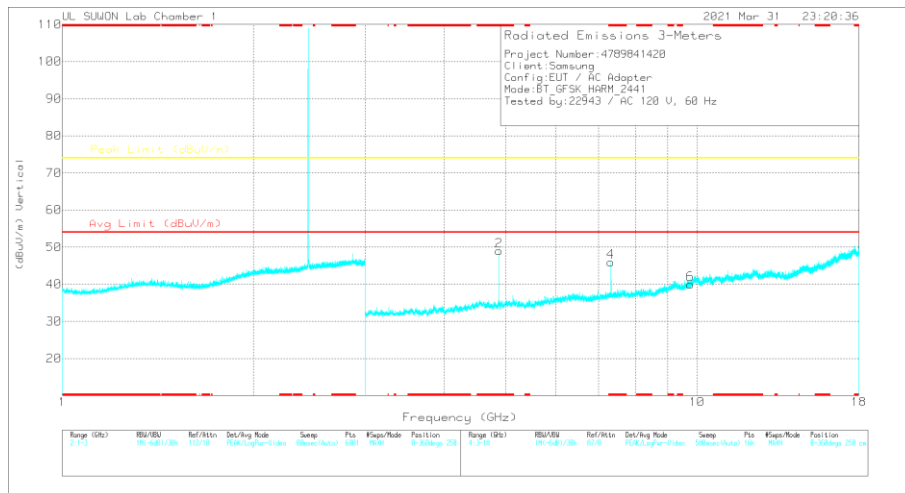


### VERTICAL

### RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0016871 7	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.88224	46.62	PKFH	34.1	-31.4	49.32	-	-	74	-24.68	59	109	H
* 4.88194	40.31	VA1T	34.1	-31.3	43.11	54	-10.89	-	-	59	109	H
* 4.88202	49.1	PKFH	34.1	-31.3	51.9	-	-	74	-22.1	150	199	V
* 4.8818	44.78	VA1T	34.1	-31.3	47.58	54	-6.42	-	-	150	199	V
* 7.32238	38.48	PKFH	35.8	-27.3	46.98	-	-	74	-27.02	66	150	H
* 7.3233	29.1	VA1T	35.8	-27.3	37.6	54	-16.4	-	-	66	150	H
* 7.32344	42.29	PKFH	35.8	-27.3	50.79	-	-	74	-23.21	96	250	V
* 7.32302	36.21	VA1T	35.8	-27.3	44.71	54	-9.29	-	-	96	250	V
9.77061	33.03	PKFH	37.5	-23.8	46.73	-	-	74	-27.27	0	100	H
9.76315	32.81	PKFH	37.4	-23.7	46.51	-	-	74	-27.49	0	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

### 78 CHANNEL RESULTS

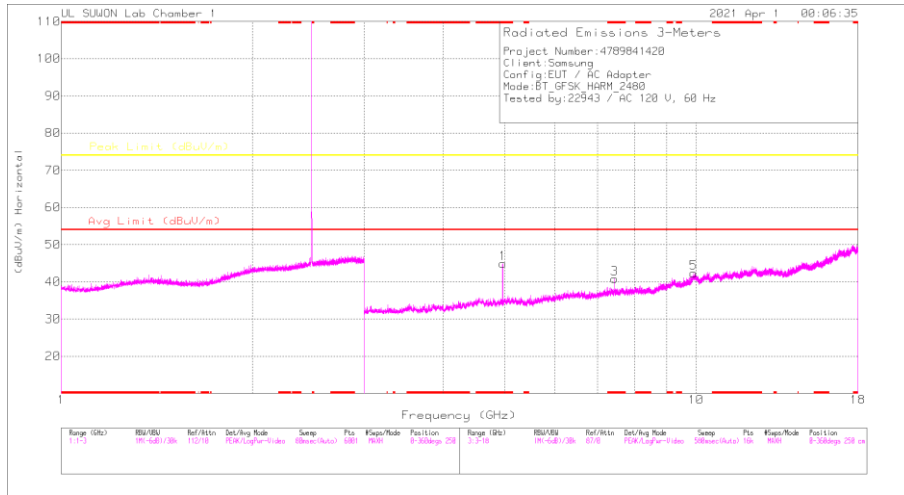

### HORIZONTAL

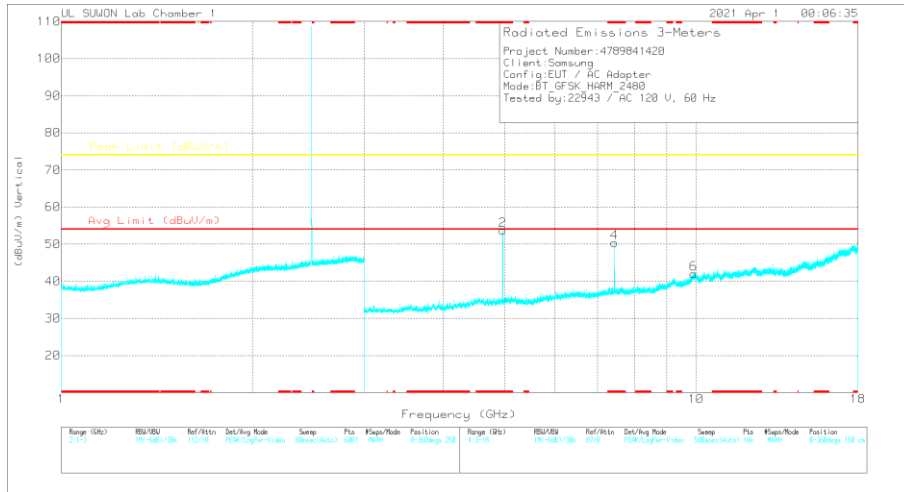

### VERTICAL

### RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0016871 7	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.95974	53.27	PKFH	34.1	-31.4	55.97	-	-	74	-18.03	149	238	V
* 4.95974	53.27	PKFH	34.1	-31.4	**31.21	54	-22.79	-	-	149	238	V
* 4.95964	46.76	PKFH	34.1	-31.4	49.46	-	-	74	-24.54	204	167	H
* 4.96002	42.87	VA1T	34.1	-31.4	45.57	54	-8.43	-	-	204	167	H
* 7.4404	43.74	PKFH	35.8	-26.8	52.74	-	-	74	-21.26	289	326	V
* 7.43998	38.04	VA1T	35.8	-26.8	47.04	54	-6.96	-	-	289	326	V
* 7.4406	39.99	PKFH	35.8	-26.8	48.99	-	-	74	-25.01	222	387	H
* 7.43998	32.61	VA1T	35.8	-26.8	41.61	54	-12.39	-	-	222	387	H
9.92171	32.72	PKFH	37.7	-21.5	48.92	-	-	74	-25.08	360	100	H
9.91975	32.53	PKFH	37.7	-21.6	48.63	-	-	74	-25.37	360	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* Data subtracted from the peak value:  $20\log(2*2.890\text{ms}/100\text{ms}) = -24.76 \text{ dB}$

PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak


VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration



### 10.1.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

#### BANDEDGE (0 CHANNEL)

#### HORIZONTAL RESULT

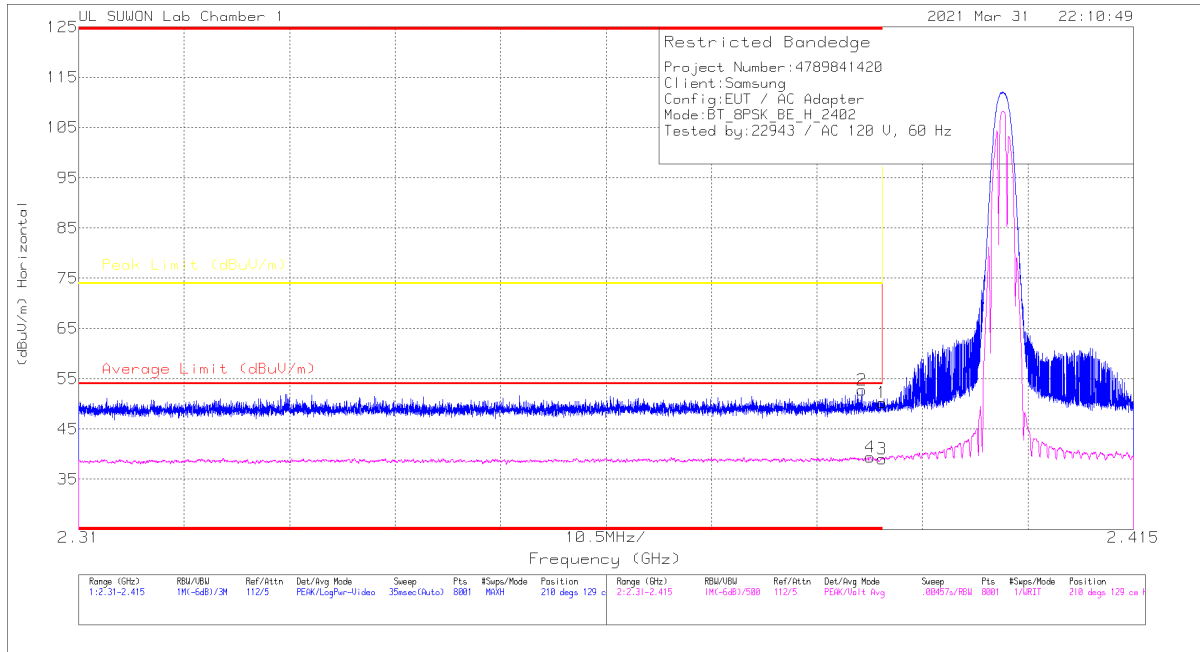


#### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	44	Pk	31.8	-25.6	50.2	-	-	74	-23.8	210	129	H
2	* 2.38796	46.43	Pk	31.8	-25.5	52.73	-	-	74	-21.27	210	129	H
3	* 2.39	32.86	VA1T	31.8	-25.6	39.06	54	-14.94	-	-	210	129	H
4	* 2.3888	33.12	VA1T	31.8	-25.5	39.42	54	-14.58	-	-	210	129	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 VA1T - FHSS: Linear Voltage Average  $V_B=1/T_{on}$  where:  $T_{on}$  is transmit duration

### VERTICAL RESULT

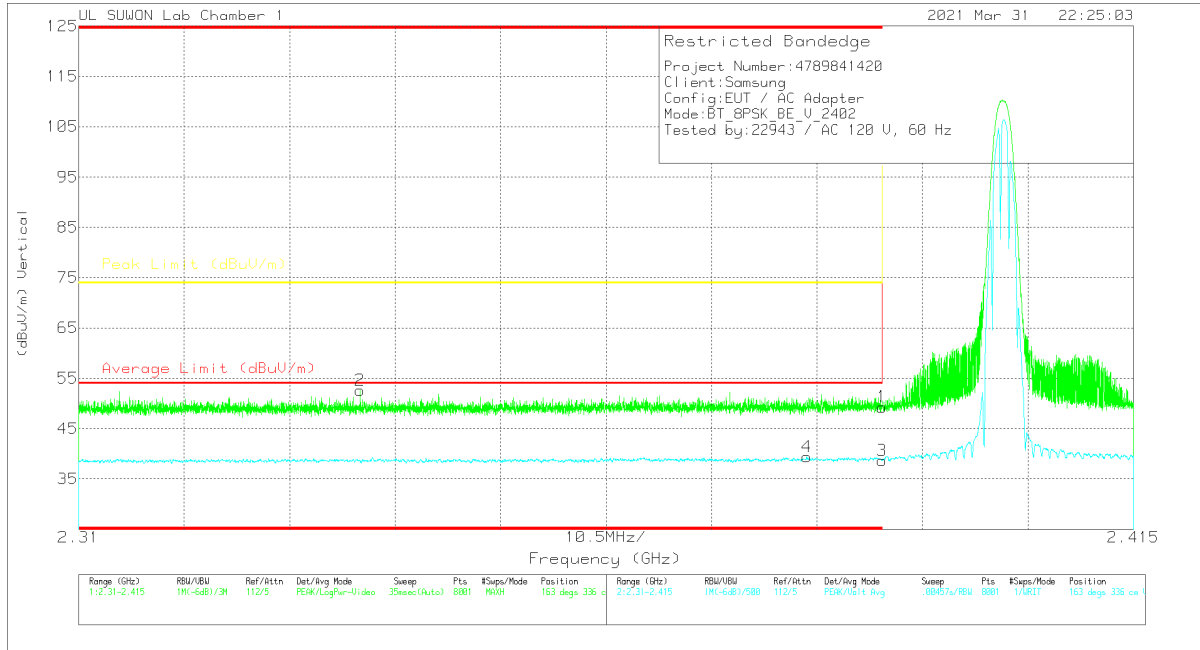


### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.12	Pk	31.8	-25.6	49.32	-	-	74	-24.68	163	336	V
2	* 2.33801	46.49	Pk	31.7	-25.6	52.59	-	-	74	-21.41	163	336	V
3	* 2.39	32.51	VA1T	31.8	-25.6	38.71	54	-15.29	-	-	163	336	V
4	* 2.38246	33.21	VA1T	31.8	-25.6	39.41	54	-14.59	-	-	163	336	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

**BANDEDGE (78 CHANNEL)**

**HORIZONTAL RESULT**

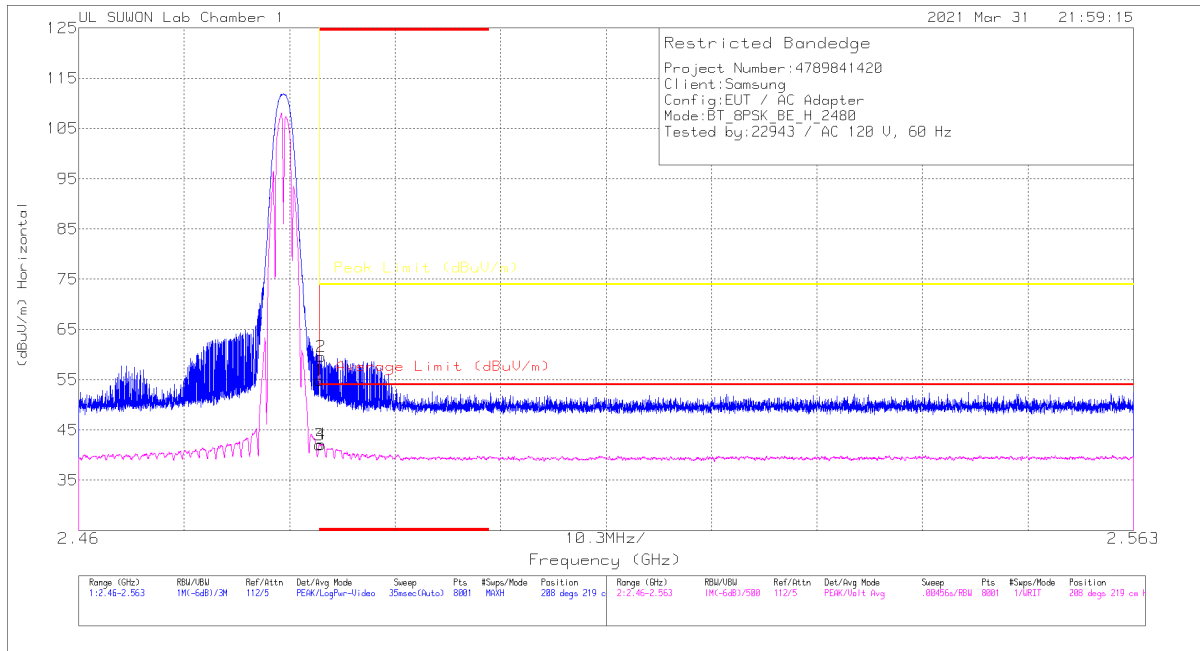


**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	48.2	PK	32	-25.3	54.9	-	-	74	-19.1	208	219	H
2	* 2.48365	52.87	PK	32	-25.3	59.57	-	-	74	-14.43	208	219	H
3	* 2.48351	35.37	VA1T	32	-25.3	42.07	54	-11.93	-	-	208	219	H
4	* 2.48368	35.47	VA1T	32	-25.3	42.17	54	-11.83	-	-	208	219	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

### VERTICAL RESULT

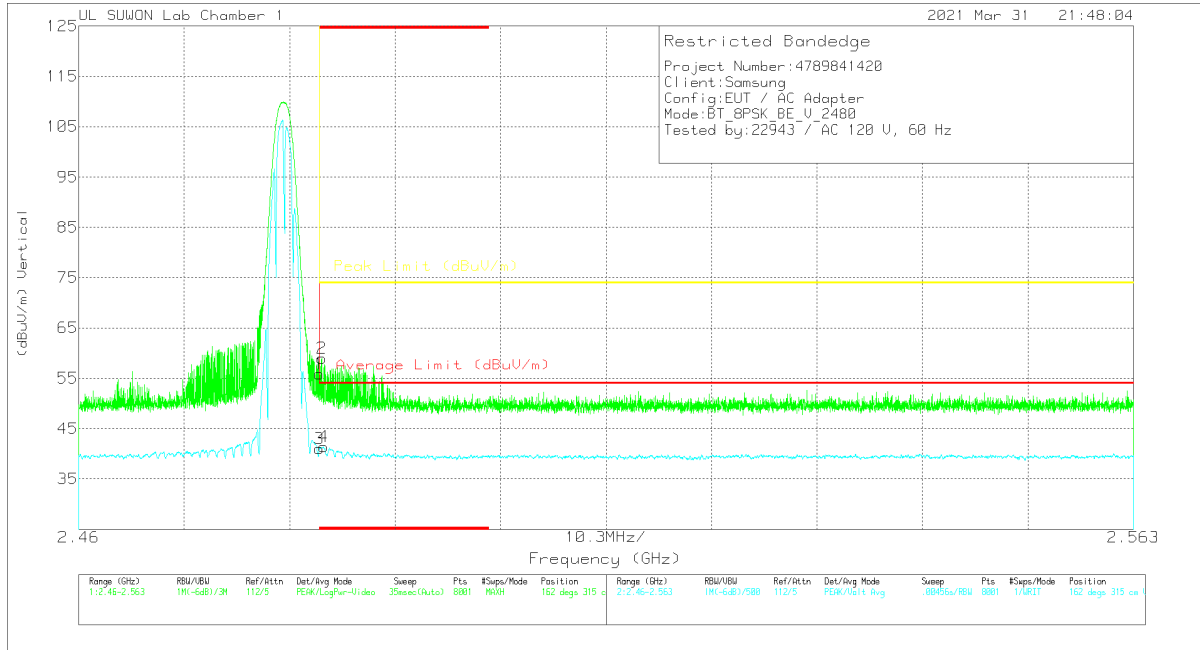


### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	49.22	Pk	32	-25.3	55.92	-	-	74	-18.08	162	315	V
2	* 2.48373	52.26	Pk	32	-25.3	58.96	-	-	74	-15.04	162	315	V
3	* 2.48351	34.37	VA1T	32	-25.3	41.07	54	-12.93	-	-	162	315	V
4	* 2.48393	34.67	VA1T	32	-25.3	41.37	54	-12.63	-	-	162	315	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

# HARMONICS AND SPURIOUS EMISSIONS

## 0 CHANNEL RESULTS

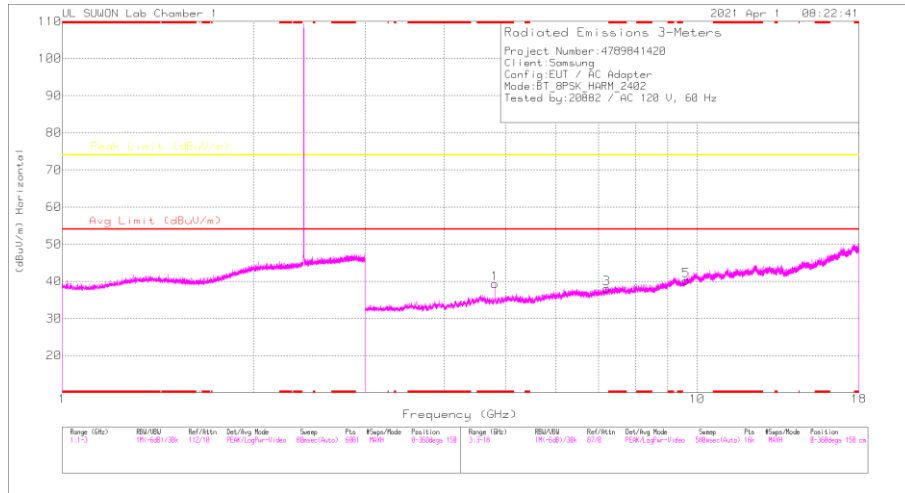

### HORIZONTAL

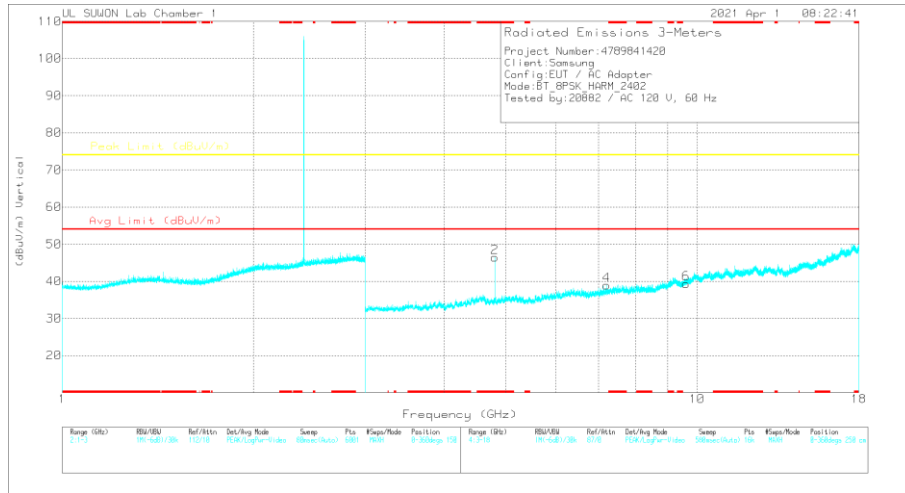


### VERTICAL

## RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0016871 7	3GHz_HP[dB]	Ant Gain [dBi]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.80432	45.22	PKFH	34.1	-31.5	0	47.82	-	-	74	-26.18	69	144	H
* 4.80403	37.14	VA1T	34.1	-31.5	0	39.74	54	-14.26	-	-	69	144	H
* 4.80414	47.44	PKFH	34.1	-31.5	0	50.04	-	-	74	-23.96	38	145	V
* 4.80405	39.58	VA1T	34.1	-31.5	0	42.18	54	-11.82	-	-	38	145	V
7.20387	36.47	PKFH	35.9	-27.7	0	44.67	-	-	74	-29.33	0	100	H
7.20164	35.5	PKFH	35.9	-27.6	0	43.8	-	-	74	-30.2	0	100	V
9.60935	33.87	PKFH	37.1	-23	0	47.97	-	-	74	-26.03	0	100	H
9.61189	33.43	PKFH	37.1	-23.1	0	47.43	-	-	74	-26.57	0	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

### 39 CHANNEL RESULTS

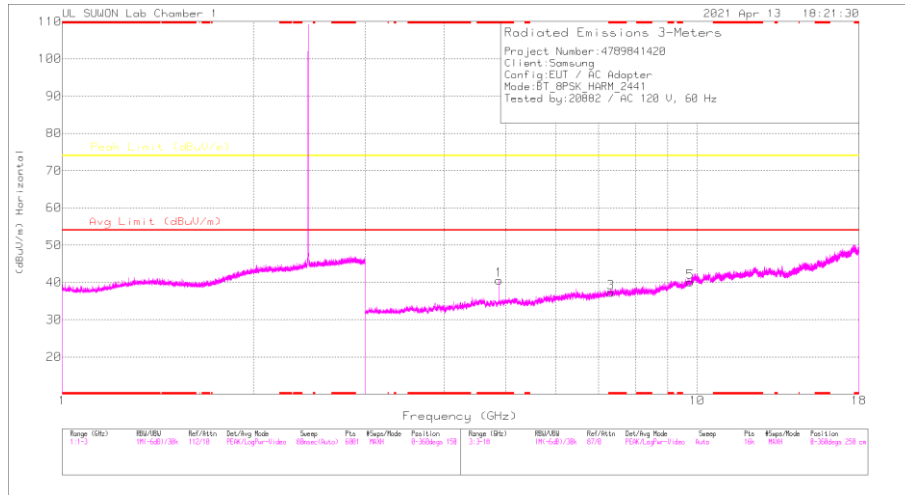

HORIZONTAL

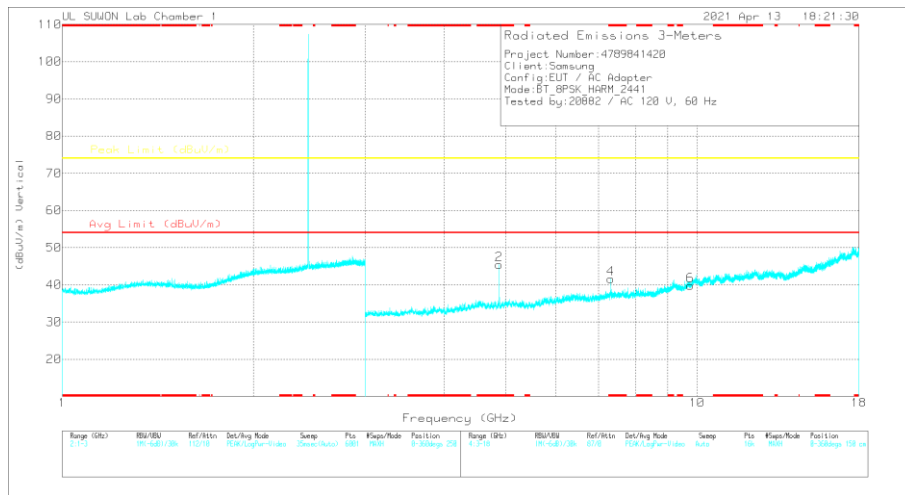


VERTICAL

### RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0016871 7	3GHz_HP[dB]	Ant Gain [dBi]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.88205	45.57	PKFH	34.1	-31.3	0	48.37	-	-	74	-25.63	58	142	H
* 4.88211	36.86	VA1T	34.1	-31.3	0	39.66	54	-14.34	-	-	58	142	H
* 4.88242	46.18	PKFH	34.1	-31.4	0	48.88	-	-	74	-25.12	18	125	V
* 4.8821	38.25	VA1T	34.1	-31.3	0	41.05	54	-12.95	-	-	18	125	V
* 7.32311	37.5	PKFH	35.8	-27.3	0	46	-	-	74	-28	61	134	H
* 7.32326	27.42	VA1T	35.8	-27.3	0	35.92	54	-18.08	-	-	61	134	H
* 7.3228	41.82	PKFH	35.8	-27.3	0	50.32	-	-	74	-23.68	165	232	V
* 7.32309	31.27	VA1T	35.8	-27.3	0	39.77	54	-14.23	-	-	165	232	V
9.76563	34.01	PKFH	37.4	-23.7	0	47.71	-	-	74	-26.29	0	100	H
9.76512	33.37	PKFH	37.4	-23.7	0	47.07	-	-	74	-26.93	0	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

### 78 CHANNEL RESULTS

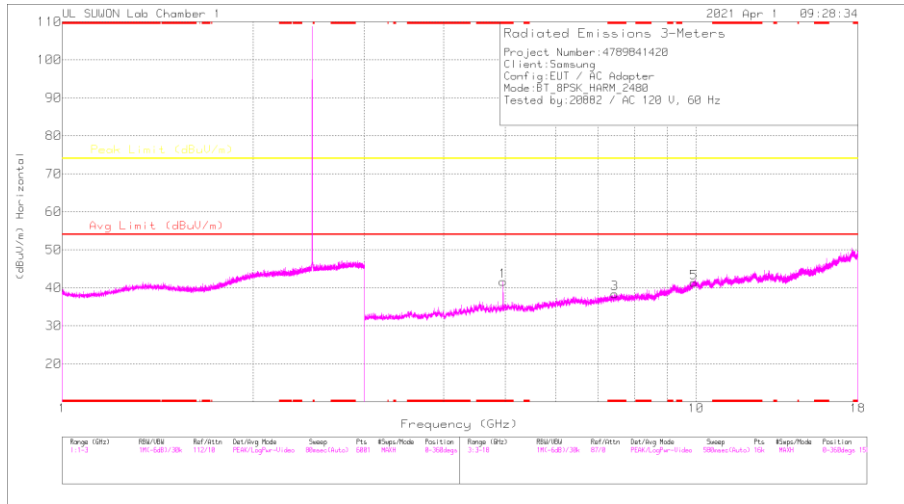

### HORIZONTAL

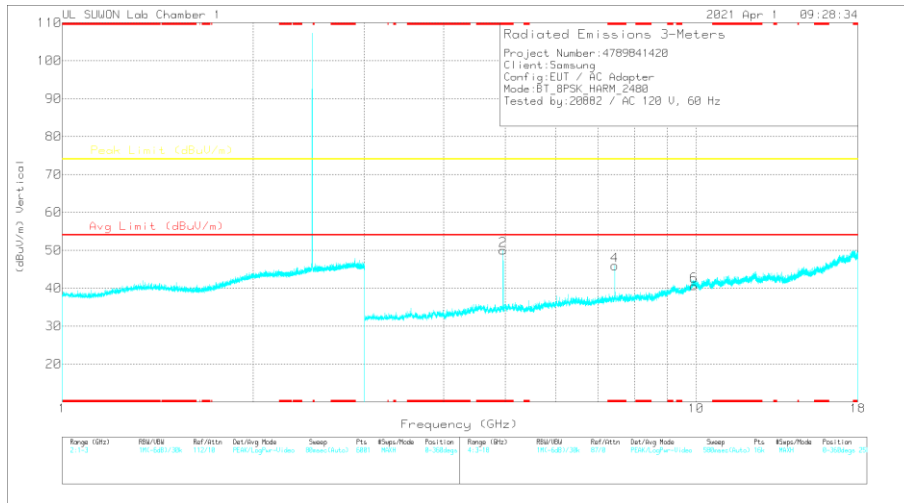


### VERTICAL

### RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_0016871 7	3GHz_HP[dB]	Ant Gain [dBi]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.95992	45.58	PKFH	34.1	-31.4	0	48.28	-	-	74	-25.72	202	148	H
* 4.95994	38.22	VA1T	34.1	-31.4	0	40.92	54	-13.08	-	-	202	148	H
* 4.95973	50.05	PKFH	34.1	-31.4	0	52.75	-	-	74	-21.25	154	145	V
* 4.95996	43.67	VA1T	34.1	-31.4	0	46.37	54	-7.63	-	-	154	145	V
* 7.43949	41.85	PKFH	35.8	-26.8	0	50.85	-	-	74	-23.15	192	319	H
* 7.43996	31.22	VA1T	35.8	-26.8	0	40.22	54	-13.78	-	-	192	319	H
* 7.43993	46.32	PKFH	35.8	-26.8	0	55.32	-	-	74	-18.68	89	229	V
* 7.44009	36.28	VA1T	35.8	-26.8	0	45.28	54	-8.72	-	-	89	229	V
9.91995	32.37	PKFH	37.7	-21.6	0	48.47	-	-	74	-25.53	0	100	H
9.91828	32.51	PKFH	37.7	-21.6	0	48.61	-	-	74	-25.39	0	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

## 10.2. WORST CASE BELOW 1 GHZ SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

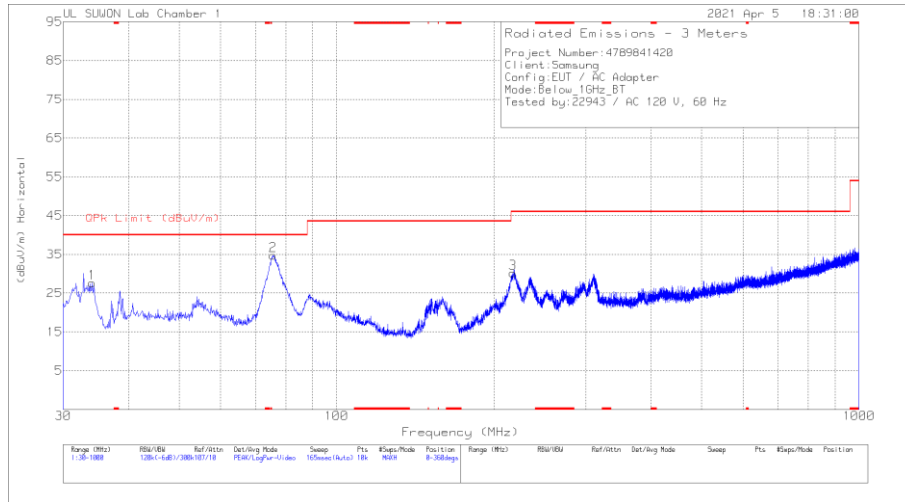

**HORIZONTAL**

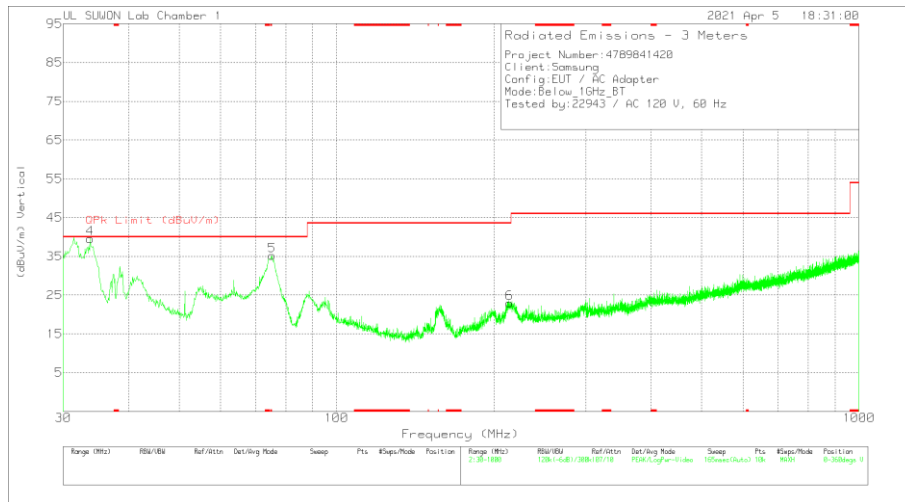

**VERTICAL**

### Below 1GHz Data Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_750	Below_1G[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	34.074	42.34	Pk	16.2	-30.9	27.64	40	-12.36	0-360	300	H
2	75.59	51.55	Pk	13.2	-30	34.75	40	-5.25	0-360	200	H
3	217.598	41.5	Pk	17	-28.3	30.2	46.02	-15.82	0-360	200	H
4	33.783	54.26	Pk	16.1	-30.8	39.56	40	-.44	0-360	100	V
5	75.299	51.79	Pk	13.3	-29.9	35.19	40	-4.81	0-360	100	V
6	214.397	34.46	Pk	16.8	-28.3	22.96	43.52	-20.56	0-360	100	V

Pk - Peak detector

### Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_750	Below_1G[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
33.783	49.16	Qp	16.1	-30.8	34.46	40	-5.54	349	100	V

Qp - Quasi-Peak detector



## 11. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS

### 11.1.1. AC Power Line

#### LINE 1 RESULTS

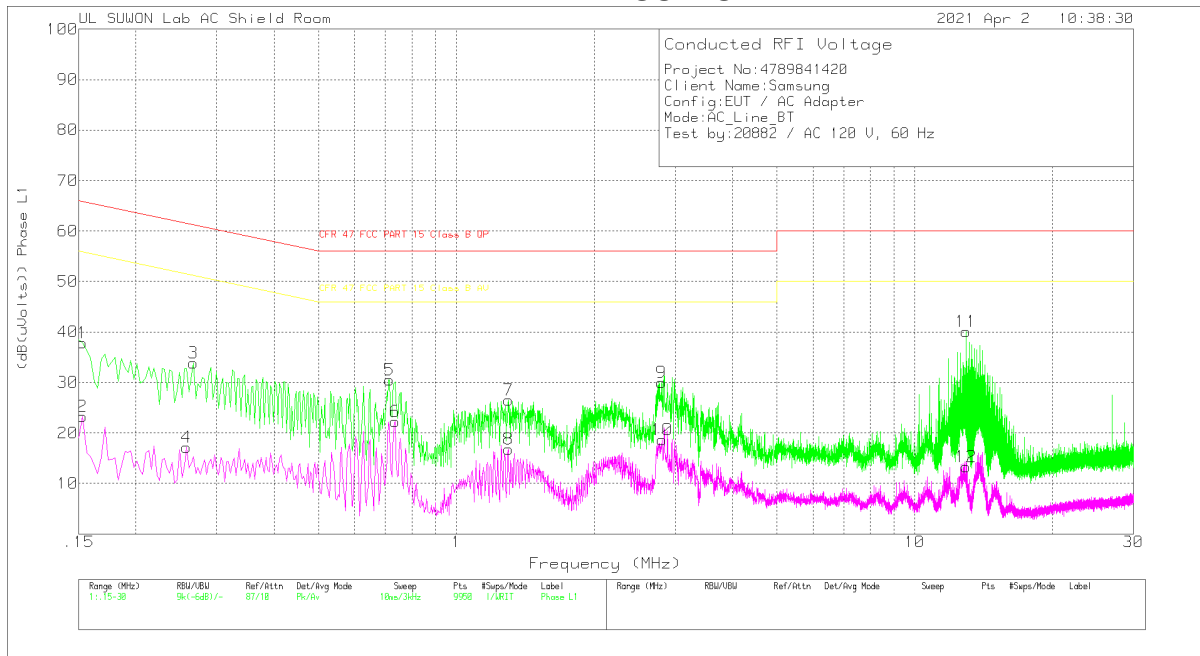


#### Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_L1[dB]	CABLELOSS (dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.153	27.96	Pk	9.8	.1	37.86	65.84	-27.98	-	-
2	.153	13.33	Av	9.8	.1	23.23	-	-	55.84	-32.61
3	.267	23.98	Pk	9.7	.2	33.88	61.21	-27.33	-	-
4	.258	7.25	Av	9.7	.2	17.15	-	-	51.5	-34.35
5	.714	20.42	Pk	9.9	.2	30.52	56	-25.48	-	-
6	.735	12.14	Av	9.9	.2	22.24	-	-	46	-23.76
7	1.299	16.45	Pk	9.8	.3	26.55	56	-29.45	-	-
8	1.299	6.67	Av	9.8	.3	16.77	-	-	46	-29.23
9	2.802	20.03	Pk	9.7	.3	30.03	56	-25.97	-	-
10	2.808	8.69	Av	9.7	.3	18.69	-	-	46	-27.31
11	12.924	29.71	Pk	10	.4	40.11	60	-19.89	-	-
12	12.924	2.94	Av	10	.4	13.34	-	-	50	-36.66

Pk - Peak detector  
 Av - Average detection

**LINE 2 RESULTS**

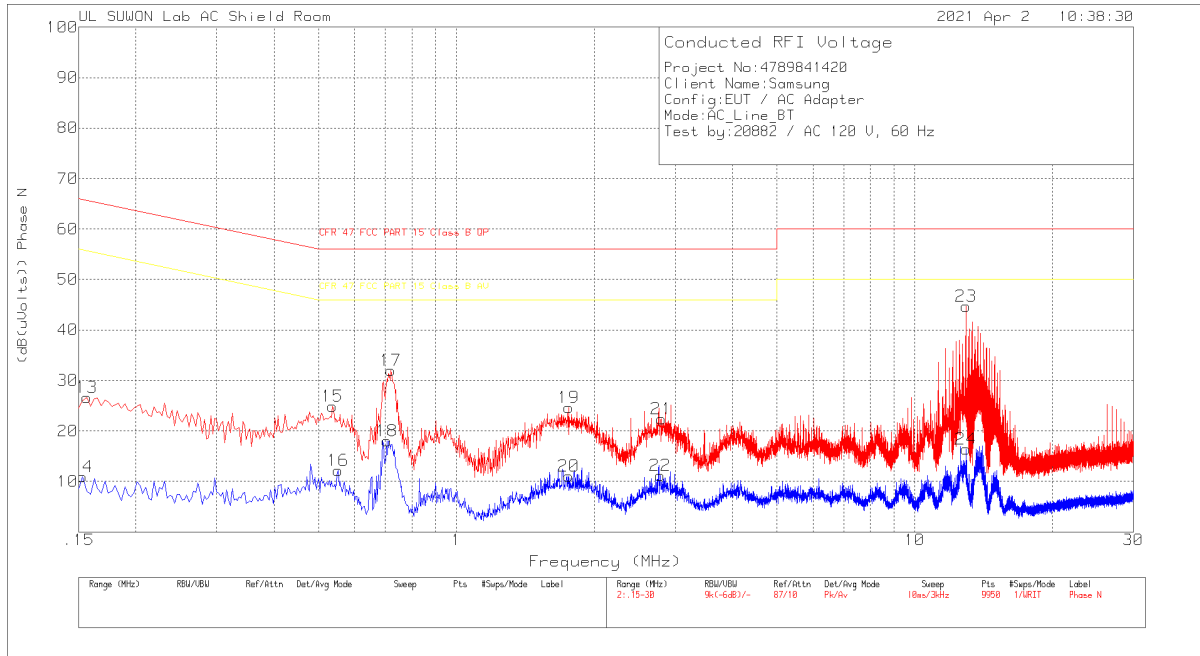

**Trace Markers**

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_N[dB]	CABLELOSS (dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.156	16.66	Pk	9.9	.1	26.66	65.67	-39.01	-	-
14	.153	1.08	Av	9.8	.1	10.98	-	-	55.84	-44.86
15	.537	14.8	Pk	9.9	.2	24.9	56	-31.1	-	-
16	.552	2.09	Av	9.9	.2	12.19	-	-	46	-33.81
17	.72	21.89	Pk	9.9	.2	31.99	56	-24.01	-	-
18	.705	7.9	Av	9.9	.2	18	-	-	46	-28
19	1.761	14.57	Pk	9.8	.3	24.67	56	-31.33	-	-
20	1.761	.9	Av	9.8	.3	11	-	-	46	-35
21	2.799	12.33	Pk	9.8	.3	22.43	56	-33.57	-	-
22	2.784	1.03	Av	9.8	.3	11.13	-	-	46	-34.87
23	12.936	34.31	Pk	10	.4	44.71	60	-15.29	-	-
24	12.93	5.96	Av	10	.4	16.36	-	-	50	-33.64

Pk - Peak detector  
 Av - Average detection

**END OF TEST REPORT**