



# **CERTIFICATION TEST REPORT**

**Report Number.** : 4789867746-E5V2

**Applicant** : SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 16677, KOREA

**Model** : SM-T735

**FCC ID** : A3LSMT735

**EUT Description** : GSM/WCDMA/LTE Tablet + BT/BLE, DTS/UNII a/b/g/n/ac

**Test Standard(s)** : FCC 47 CFR PART 15 SUBPART C

**Date Of Issue:**

2021-04-30

**Prepared by:**

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433



Revision History

| <u>Rev.</u> | <u>Issue Date</u> | <u>Revisions</u>                  | <u>Revised By</u> |
|-------------|-------------------|-----------------------------------|-------------------|
| V1          | 2021-04-22        | Initial issue                     | Hyunsik Yun       |
| V2          | 2021-04-30        | Updated to address TCB's question | Hyunsik Yun       |

## TABLE OF CONTENTS

|  |           |
|--|-----------|
| <b>1. ATTESTATION OF TEST RESULTS</b>                | <b>5</b>  |
| 1.1. INTRODUCTION OF TEST DATA REUSE                 | 6         |
| 1.2. DIFFERENCE                                      | 6         |
| 1.3. SPOT CHECK VERIFICATION DATA                    | 6         |
| 1.4. REFERENCE DETAIL                                | 7         |
| <b>2. TEST METHODOLOGY</b>                           | <b>8</b>  |
| <b>3. FACILITIES AND ACCREDITATION</b>               | <b>8</b>  |
| <b>4. DECISION RULES AND MEASUREMENT UNCERTAINTY</b> | <b>9</b>  |
| 4.1. METROLOGICAL TRACEABILITY                       | 9         |
| 4.2. SAMPLE CALCULATION                              | 9         |
| 4.3. DECISION RULES                                  | 9         |
| 4.4. MEASUREMENT UNCERTAINTY                         | 9         |
| <b>5. EQUIPMENT UNDER TEST</b>                       | <b>10</b> |
| 5.1. EUT DESCRIPTION                                 | 10        |
| 5.2. MAXIMUM OUTPUT POWER                            | 10        |
| 5.3. DESCRIPTION OF AVAILABLE ANTENNAS               | 10        |
| 5.4. WORST-CASE CONFIGURATION AND MODE               | 11        |
| 5.5. DESCRIPTION OF TEST SETUP                       | 12        |
| <b>6. TEST AND MEASUREMENT EQUIPMENT</b>             | <b>14</b> |
| <b>7. TEST RESULTS SUMMARY</b>                       | <b>15</b> |
| <b>8. MEASUREMENT METHODS</b>                        | <b>16</b> |
| <b>9. ANTENNA PORT TEST RESULTS</b>                  | <b>17</b> |
| 9.1. ON TIME AND DUTY CYCLE                          | 17        |
| 9.2. 20 dB AND 99% BANDWIDTH                         | 18        |
| 9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION     | 18        |
| 9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION  | 18        |
| 9.3. HOPPING FREQUENCY SEPARATION                    | 21        |
| 9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION     | 22        |
| 9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION  | 22        |
| 9.4. NUMBER OF HOPPING CHANNELS                      | 23        |
| 9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION     | 24        |
| 9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION  | 25        |
| 9.5. AVERAGE TIME OF OCCUPANCY                       | 26        |
| 9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION     | 27        |

---

|  |           |
|--|-----------|
| 9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....   | 29        |
| 9.6. OUTPUT POWER.....                                     | 31        |
| 9.6.1. BASIC DATA RATE GFSK MODULATION.....                | 31        |
| 9.6.2. ENHANCED DATA RATE PI/4-DPSK MODULATION .....       | 31        |
| 9.6.3. ENHANCED DATA RATE 8PSK MODULATION .....            | 31        |
| 9.6.4. OUTPUT POWER PLOTS.....                             | 32        |
| 9.7. AVERAGE POWER .....                                   | 34        |
| 9.7.1. BASIC DATA RATE GFSK MODULATION.....                | 34        |
| 9.7.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION .....      | 34        |
| 9.7.3. ENHANCED DATA RATE 8PSK MODULATION .....            | 34        |
| 9.8. CONDUCTED SPURIOUS EMISSIONS.....                     | 35        |
| 9.8.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION .....     | 36        |
| 9.8.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....   | 38        |
| <b>10. RADIATED TEST RESULTS .....</b>                     | <b>40</b> |
| 10.1. TRANSMITTER ABOVE 1 GHz.....                         | 42        |
| 10.1.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION .....    | 42        |
| 10.1.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION ..... | 49        |
| 10.2. WORST CASE BELOW 1 GHZ.....                          | 56        |
| <b>11. AC POWER LINE CONDUCTED EMISSIONS .....</b>         | <b>57</b> |
| 11.1.1. AC Power Line.....                                 | 58        |

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.  
**EUT DESCRIPTION:** GSM/WCDMA/LTE Tablet + BT/BLE, DTS/UNII a/b/g/n/ac  
**MODEL:** SM-T735  
**SERIAL NUMBER:** R32R2009HKX (Conducted, Original);  
R32R2009QPH, R32R2009K5M, R32R300FS7B (Radiated, Original);  
R32R200DYSJ (Radiated, Spot-check);  
**DATE TESTED:** 2021-03-16 ~ 2021-04-14(Original);  
2021-04-13 ~ 2021-04-22(Spot-check);

| APPLICABLE STANDARDS     |              |
|--------------------------|--------------|
| STANDARD                 | TEST RESULTS |
| CFR 47 Part 15 Subpart C | Complies     |

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:



Junwhan Lee  
Suwon Lab Engineer  
UL Korea, Ltd.

Tested By:



Hyunsik Yun  
Suwon Lab Engineer  
UL Korea, Ltd.

## 1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMT736B BT(FCC CFR 47 Part 15C).  
 And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

## 1.2. DIFFERENCE

The FCC ID: A3LSMT735 shares the same enclosure and circuit board as FCC ID: A3LSMT736B. The BT antennas and surrounding circuitry and layout are identical between these two units for re-used bands.

In SM-T735 model, 5G NR parts are removed from the PCB.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMT736B remains representative of FCC ID: A3LSMT735. The test data of FCC ID: A3LSMT736B being submitted for this application to cover BT features.

## 1.3. SPOT CHECK VERIFICATION DATA

| Band   | Test Item | Mode      | Frequency | Test Limit | Original model      | Spot check model   | Deviation | Remark |
|--------|-----------|-----------|-----------|------------|---------------------|--------------------|-----------|--------|
|        |           |           |           |            | SM-T736B            | SM-T735            |           |        |
|        |           |           |           |            | FCC ID : A3LSMT736B | FCC ID : A3LSMT735 |           |        |
| DSS BT | Band Edge | GFSK 2480 | 2480 MHz  | 54 dBuV/m  | 42.69 dBuV/m        | 41.69 dBuV/m       | -1.00 dB  |        |
|        | RSE       | GFSK 2480 | 4960 MHz  | 74 dBuV/m  | 55.97 dBuV/m        | 46.66 dBuV/m       | -9.31 dB  |        |

Comparison of two models, upper deviation is within 3dB range and all test results are under FCC technical limits.

**1.4. REFERENCE DETAIL**

Reference application that contains the re-used reference data.

| Equipment Class | Reference FCC ID | Application Type | Reference Test report | Reuse (EMC/RFX) | Report Title / Section                           |
|-----------------|------------------|------------------|-----------------------|-----------------|--|
| PCB             | A3LSMT736B       | Original Grant   | 4789841420-E2         | EMC             | FCC Report WWAN/<br>All sections                 |
| DTS             | A3LSMT736B       | Original Grant   | 4789841420-E3         | EMC             | Report DTS[b,g,n]<br>WLAN/<br>All sections       |
|                 |                  |                  | 4789841420-E4         | EMC             | FCC Report BLE/<br>All sections                  |
| DSS             | A3LSMT736B       | Original Grant   | 4789841420-E5         | EMC             | FCC Report BT/<br>All sections                   |
| NII             | A3LSMT736B       | Original Grant   | 4789841420-E6         | EMC             | FCC Report UNII[a,n,ac]<br>WLAN/<br>All sections |

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 15.247 Meas Guidance v05r02.
4. ANSI C63.10-2013.
5. KDB 484596 D01 Referencing Test Data v01

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 218 Maeyeong-ro                     |           |
|-------------------------------------|-----------|
| <input checked="" type="checkbox"/> | Chamber 1 |
| <input checked="" type="checkbox"/> | Chamber 2 |
| <input type="checkbox"/>            | Chamber 3 |

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.



---

## 4. DECISION RULES AND MEASUREMENT UNCERTAINTY

### 4.1. METROLOGICAL TRACEABILITY

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. DECISION RULES

Decision rule for statement(s) of conformity is based on Procedure 1, Clause 4.4.2 in IEC Guide 115:2007.

### 4.4. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                              | UNCERTAINTY |
|--|-------------|
| Conducted Disturbance, 0.15 to 30 MHz  | 3.01 dB     |
| Radiated Disturbance, 30 MHz to 1 GHz  | 4.26 dB     |
| Radiated Disturbance, 1 GHz to 18 GHz  | 5.90 dB     |
| Radiated Disturbance, 18 GHz to 40 GHz | 5.49 dB     |

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE Tablet + BT/BLE, DTS/UNII a/b/g/n/ac.  
 This test report addresses the BT(DSS) operational mode.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

| Frequency Range [MHz] | Mode               | Power Mode | Output Power [dBm] | Output Power [mW] |
|-----------------------|--------------------|------------|--------------------|-------------------|
| 2 402 ~ 2 480         | Basic GFSK         | Average    | 17.261             | 53.22             |
|                       |                    | Peak       | 17.696             | 58.83             |
|                       | Enhanced Pi/4-DPSK | Average    | 15.450             | 35.08             |
|                       |                    | Peak       | 17.893             | 61.56             |
|                       | Enhanced 8PSK      | Average    | 15.473             | 35.26             |
|                       |                    | Peak       | 18.517             | 71.07             |

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.  
 Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes an internal antennas, with maximum gain of -1.71 dBi.


## 5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Foldable condition: Stand Alone

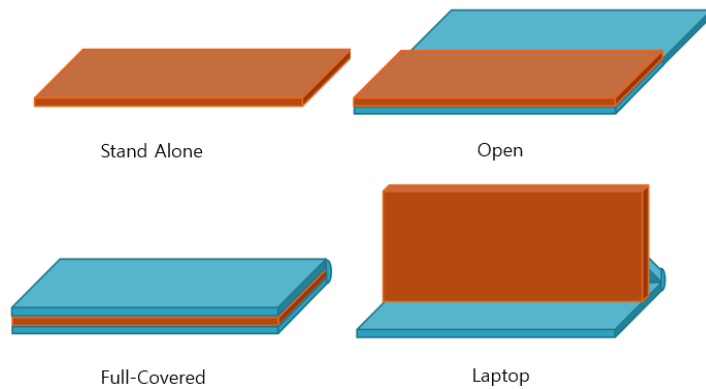

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

| Support Equipment List |              |             |                |        |
|------------------------|--------------|-------------|----------------|--------|
| Description            | Manufacturer | Model       | Serial Number  | FCC ID |
| Charger                | SAMSUNG      | EP-TA200    | R37R1XS0P35DK3 | N/A    |
| Data Cable             | SAMSUNG      | EP-DT725BBE | N/A            | N/A    |


### I/O CABLE

| I/O Cable List |          |                      |                |            |                  |         |
|----------------|----------|----------------------|----------------|------------|------------------|---------|
| Cable No.      | Port     | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| 1              | DC Power | 1                    | C Type         | Shielded   | 1.0 m            | N/A     |


### TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.  
Test software enable BT communications.

**SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)**

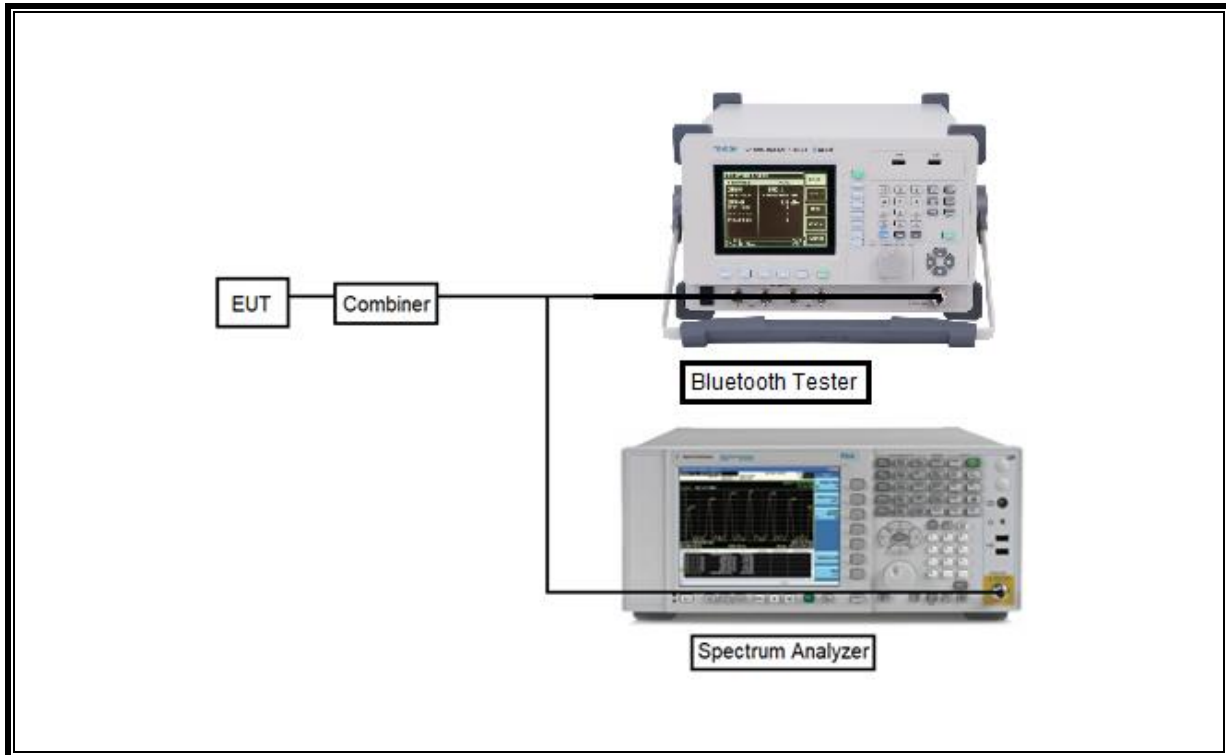

**SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)**

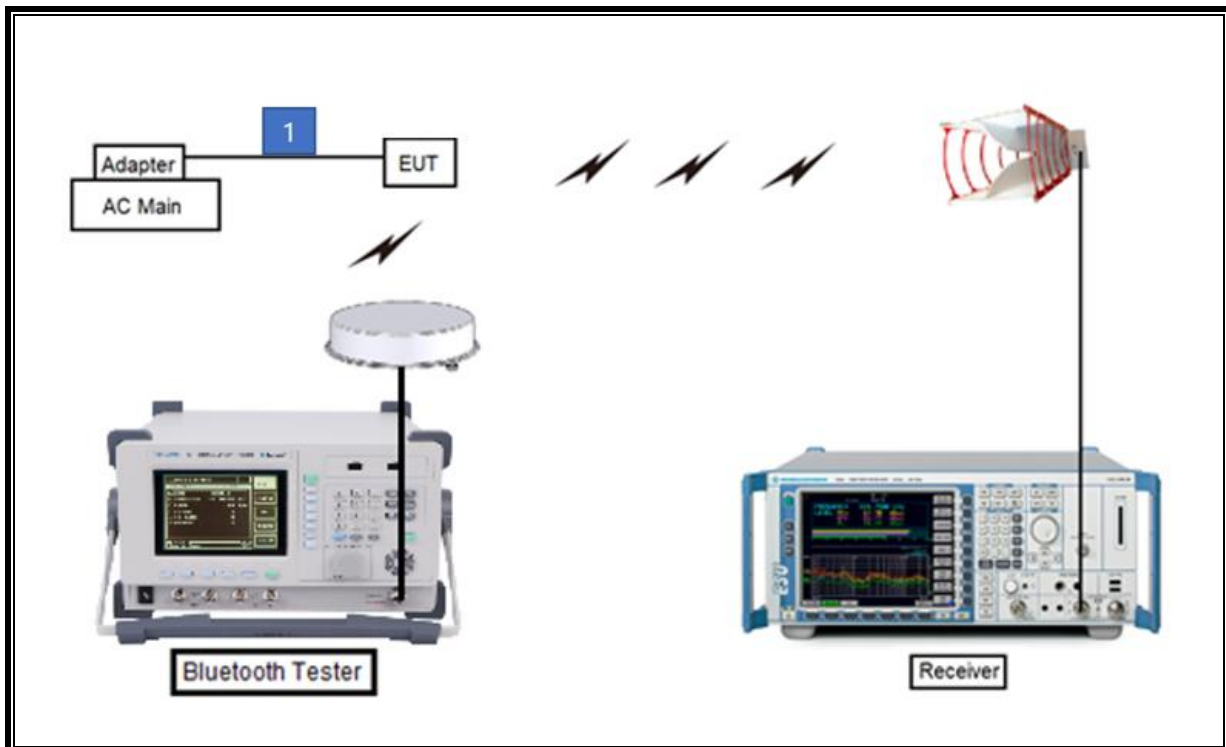

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List         |               |                        |             |          |
|-----------------------------|---------------|------------------------|-------------|----------|
| Description                 | Manufacturer  | Model                  | S/N         | Cal Due  |
| Antenna, Bilog, 30MHz-1GHz  | SCHWARZBECK   | VULB9163               | 750         | 08-19-22 |
| Antenna, Bilog, 30MHz-1GHz  | SCHWARZBECK   | VULB9163               | 749         | 08-13-22 |
| Antenna, Bilog, 30MHz-1GHz  | SCHWARZBECK   | VULB9163               | 845         | 08-13-22 |
| Antenna, Horn, 18 GHz       | ETS           | 3115                   | 00167211    | 07-27-22 |
| Antenna, Horn, 18 GHz       | ETS           | 3115                   | 00161451    | 08-15-22 |
| Antenna, Horn, 18 GHz       | ETS           | 3117                   | 00168724    | 07-27-22 |
| Antenna, Horn, 18 GHz       | ETS           | 3117                   | 00168717    | 08-15-22 |
| Antenna, Horn, 40 GHz       | ETS           | 3116C                  | 00166155    | 08-04-22 |
| Antenna, Horn, 40 GHz       | ETS           | 3116C                  | 00168645    | 10-02-21 |
| Preamplifier                | ETS           | 3116C-PA               | 00168841    | 08-06-21 |
| Preamplifier, 1000 MHz      | Sonoma        | 310N                   | 341282      | 08-03-21 |
| Preamplifier, 1000 MHz      | Sonoma        | 310N                   | 351741      | 08-03-21 |
| Preamplifier, 1000 MHz      | Sonoma        | 310N                   | 370599      | 08-06-21 |
| Preamplifier, 18 GHz        | Miteq         | AFS42-00101800-25-S-42 | 1876511     | 08-03-21 |
| Preamplifier, 18 GHz        | Miteq         | AFS42-00101800-25-S-42 | 1896138     | 08-03-21 |
| Preamplifier, 18 GHz        | Miteq         | AFS42-00101800-25-S-42 | 2029169     | 08-04-21 |
| Spectrum Analyzer, 44 GHz   | Agilent / HP  | N9030A                 | MY54170614  | 08-05-21 |
| Spectrum Analyzer, 44 GHz   | Agilent / HP  | N9030A                 | MY54490312  | 08-05-21 |
| Spectrum Analyzer, 43.5 GHz | R&S           | FSW43                  | 104089      | 08-06-21 |
| Average Power Sensor        | Agilent / HP  | U2000                  | MY54270007  | 08-05-21 |
| Bluetooth Tester            | TESCOM        | TC-3000C               | 3000C000546 | 08-05-21 |
| Power Splitter              | MINI-CIRCUITS | WA1534                 | UL001       | 01-27-22 |
| Attenuator                  | PASTERNAK     | PE7087-10              | A001        | 08-03-21 |
| Attenuator                  | PASTERNAK     | PE7087-10              | A008        | 08-03-21 |
| Attenuator                  | PASTERNAK     | PE7004-10              | 2           | 08-04-21 |
| Attenuator                  | PASTERNAK     | PE7087-10              | A009        | 08-03-21 |
| EMI Test Receive, 40 GHz    | R&S           | ESU40                  | 100439      | 08-03-21 |
| EMI Test Receive, 40 GHz    | R&S           | ESU40                  | 100457      | 08-03-21 |
| EMI Test Receive, 3 GHz     | R&S           | ESR3                   | 101832      | 08-03-21 |
| Low Pass Filter 5GHz        | Micro-Tronics | LPS17541               | 009         | 08-03-21 |
| Low Pass Filter 5GHz        | Micro-Tronics | LPS17541               | 015         | 08-03-21 |
| Low Pass Filter 5GHz        | Micro-Tronics | LPS17541               | 020         | 08-04-21 |
| High Pass Filter 3GHz       | Micro-Tronics | HPM17543               | 010         | 08-03-21 |
| High Pass Filter 3GHz       | Micro-Tronics | HPM17543               | 015         | 08-03-21 |
| High Pass Filter 3GHz       | Micro-Tronics | HPM17543               | 020         | 08-04-21 |
| High Pass Filter 6GHz       | Micro-Tronics | HPS17542               | 009         | 08-03-21 |
| High Pass Filter 6GHz       | Micro-Tronics | HPS17542               | 016         | 08-03-21 |
| High Pass Filter 6GHz       | Micro-Tronics | HPS17542               | 021         | 08-04-21 |
| LISN                        | R&S           | ENV-216                | 101837      | 08-06-21 |
| Antenna, Loop, 9kHz-30MHz   | R&S           | HFH2-Z2                | 100418      | 10-02-21 |
| UL Software                 |               |                        |             |          |
| Description                 | Manufacturer  | Model                  | Version     |          |
| Radiated software           | UL            | UL EMC                 | Ver 9.5     |          |
| AC Line Conducted software  | UL            | UL EMC                 | Ver 9.5     |          |

## 7. TEST RESULTS SUMMARY

| FCC Part Section      | Test Description                        | Test Limit                            | Test Condition       | Test Result |
|-----------------------|---|---------------------------------------|----------------------|-------------|
| 2.1051,<br>15.247(d)  | Band Edge / Conducted Spurious Emission | -20 dBc                               | Conducted            | PASS        |
| 15.247<br>(b)(1)      | TX conducted output power               | < 21 dBm                              |                      | PASS        |
| 15.247<br>(a)(1)      | Hopping frequency separation            | > two-thirds of the 20 dB bandwidth   |                      | PASS        |
| 15.247<br>(a)(1)(iii) | Number of Hopping channels              | More than 15 non-overlapping channels |                      | PASS        |
| 15.247<br>(a)(1)(iii) | Avg Time of Occupancy                   | < 8 dBm                               |                      | PASS        |
| 15.207(a)             | AC Power Line conducted emissions       | Section 11                            | Power Line conducted | PASS        |
| 15.205,<br>15.209     | Radiated Spurious Emission              | < 54dBuV/m(Av)                        | Radiated             | PASS        |

---

## 8. MEASUREMENT METHODS

20dB BW : ANSI C63.10, Section 6.9.2

99% BW : ANSI C63.10, Section 6.9.3

HOPPING FREQUENCY SEPARATION : ANSI C63.10, Section 7.8.2

NUMBER OF HOPPING CHANNELS : ANSI C63.10, Section 7.8.3

AVERAGE TIME OF OCCUPANCY : ANSI C63.10, Section 7.8.4

OUTPUT POWER : ANSI C63.10, Section 7.8.5.

Out-of-band EMISSIONS (Conducted) : ANSI C63.10, Section 7.8.6, 7.8.8

Out-of-band EMISSIONS IN NON-RESTRICTED BANDS: ANSI C63.10, Section 6.

Out-of-band EMISSIONS IN RESTRICTED BANDS : ANSI C63.10, Section 6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.



## 9. ANTENNA PORT TEST RESULTS

### 9.1. ON TIME AND DUTY CYCLE

#### LIMITS


None; for reporting purposes only.

#### PROCEDURE

ANSI C63.10, Section 11.6 : Zero-Span Spectrum Analyzer Method.

#### ON TIME AND DUTY CYCLE RESULTS

| Mode                            | On time [msec] | Period [msec] | Duty Cycle [%] | Duty Cycle Correction Factor[dB] | 1/T Minimum VBW [kHz] |
|---------------------------------|----------------|---------------|----------------|----------------------------------|-----------------------|
| <b>2 400 ~ 2 483.5 MHz Band</b> |                |               |                |                                  |                       |
| Bluetooth                       | 2.890          | 3.749         | 77.09          | 1.13                             | 0.35                  |

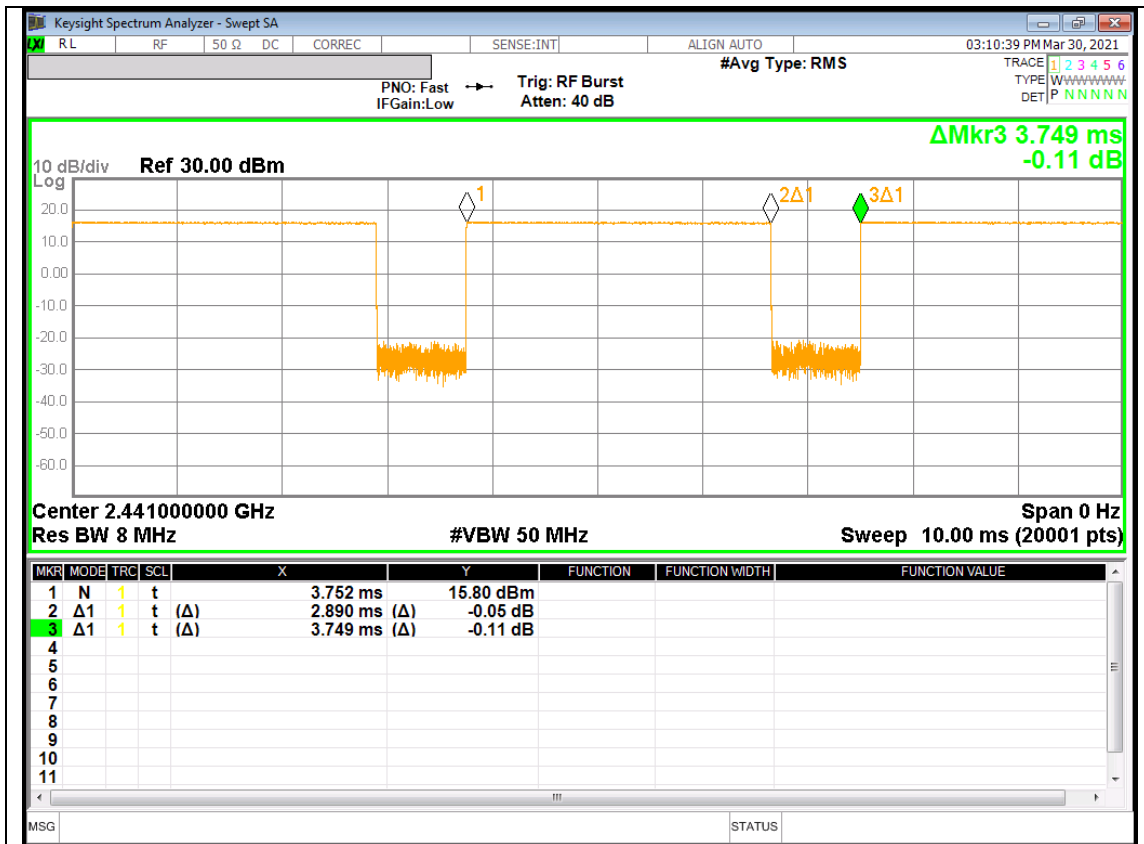

## 9.2. 20 dB AND 99% BANDWIDTH

### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

### RESULTS


#### 9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

| Channel | Frequency [MHz] | 20 dB Bandwidth [kHz] | 99% Bandwidth [kHz] |
|---------|-----------------|-----------------------|---------------------|
| 0       | 2 402           | 782.8                 | 810.6               |
| 39      | 2 441           | 823.5                 | 811.6               |
| 78      | 2 480           | 828.3                 | 814.5               |


#### 9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

| Channel | Frequency [MHz] | 20 dB Bandwidth [kHz] | 99% Bandwidth [kHz] |
|---------|-----------------|-----------------------|---------------------|
| 0       | 2 402           | 1202.5                | 1136.4              |
| 39      | 2 441           | 1204.8                | 1139.6              |
| 78      | 2 480           | 1205.8                | 1135.2              |


- BDR

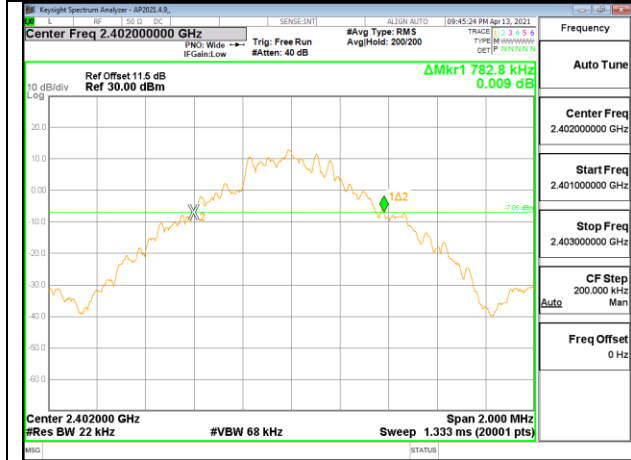


20 dB bandwidth / 0 CHANNEL

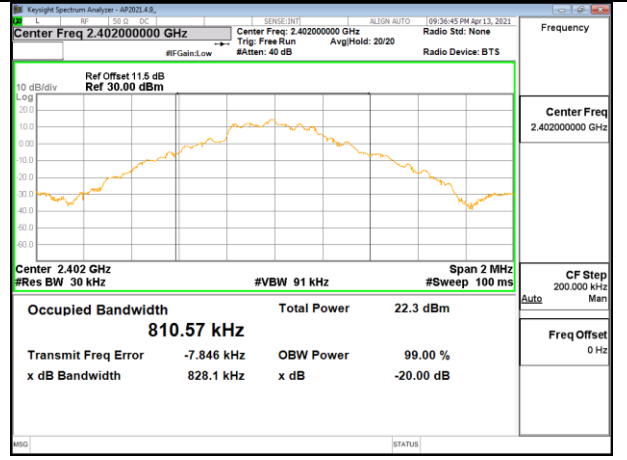


99% bandwidth / 0 CHANNEL

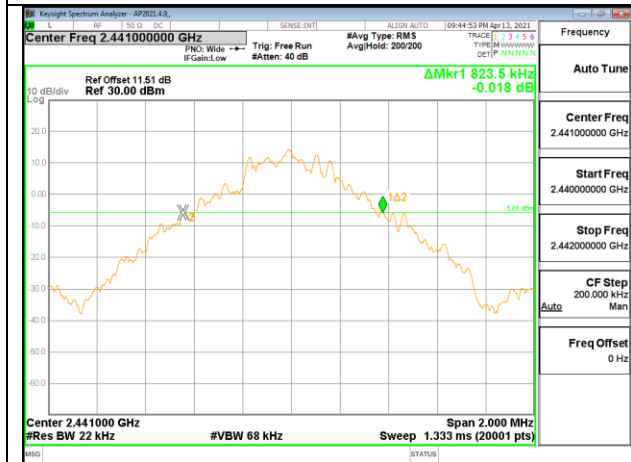


20 dB bandwidth / 39 CHANNEL

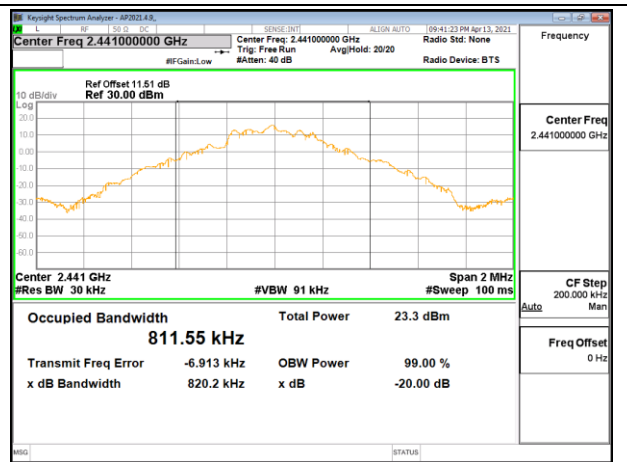

99% bandwidth / 39 CHANNEL

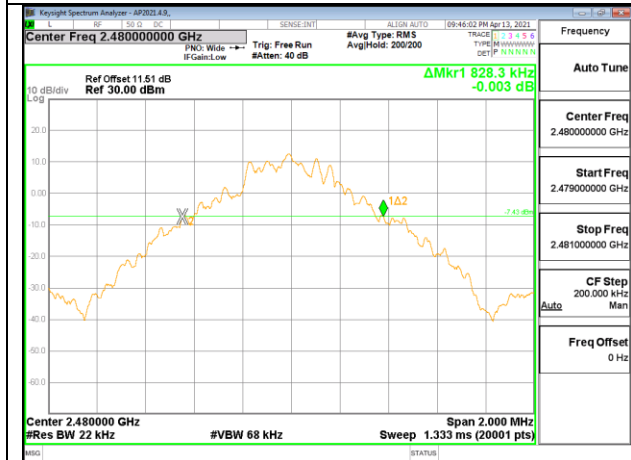


20 dB bandwidth / 78 CHANNEL

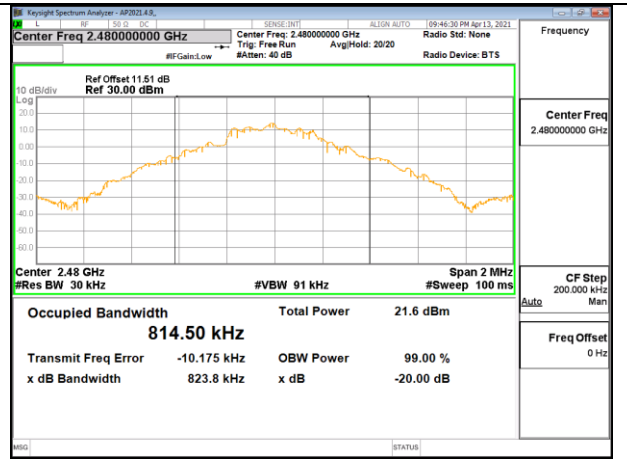


99% bandwidth / 78 CHANNEL


- EDR

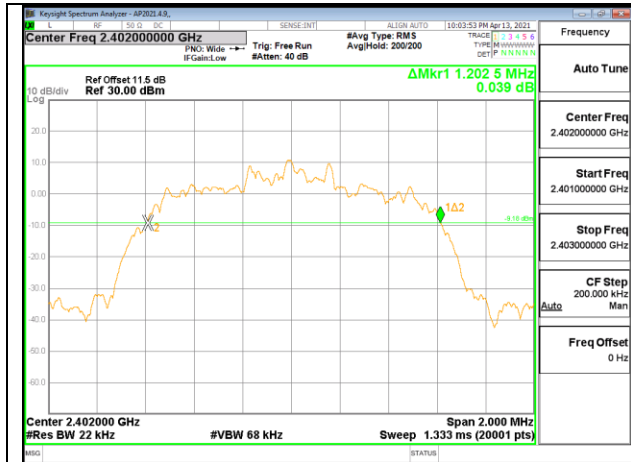


20 dB bandwidth / 0 CHANNEL

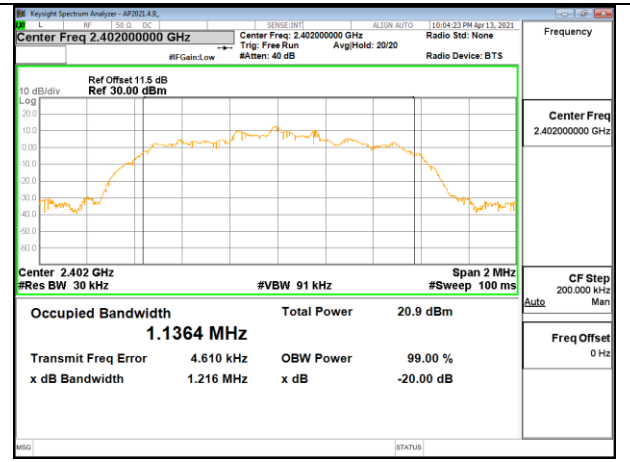


99% bandwidth / 0 CHANNEL

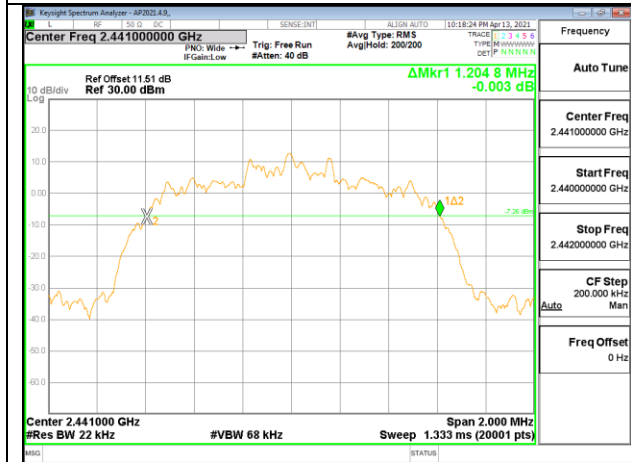


20 dB bandwidth / 39 CHANNEL

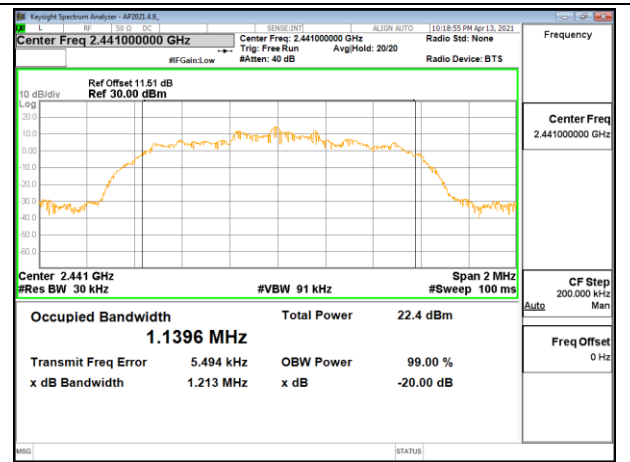

99% bandwidth / 39 CHANNEL

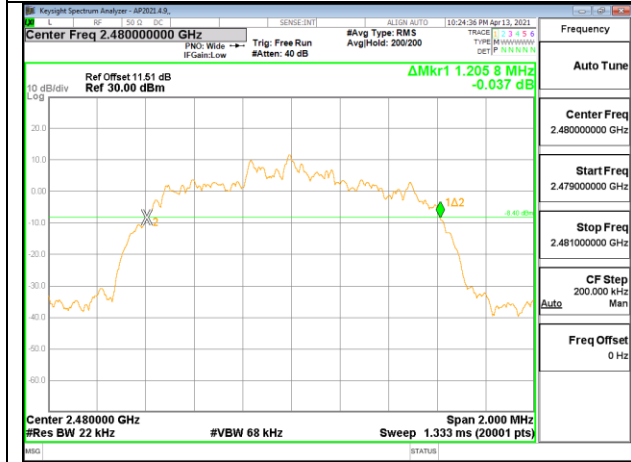

20 dB bandwidth / 78 CHANNEL

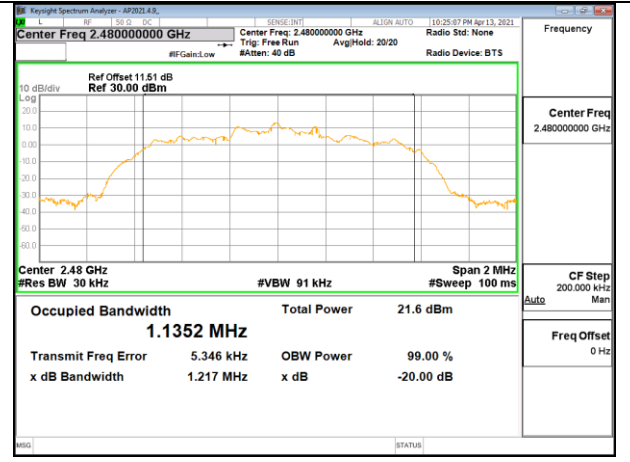

99% bandwidth / 78 CHANNEL

---

### **9.3. HOPPING FREQUENCY SEPARATION**

#### **LIMITS**

FCC §15.247 (a) (1)

RSS-247 (5.1) (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to  $VBW \geq RBW$ . The sweep time is coupled.


#### **RESULTS**

### 9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

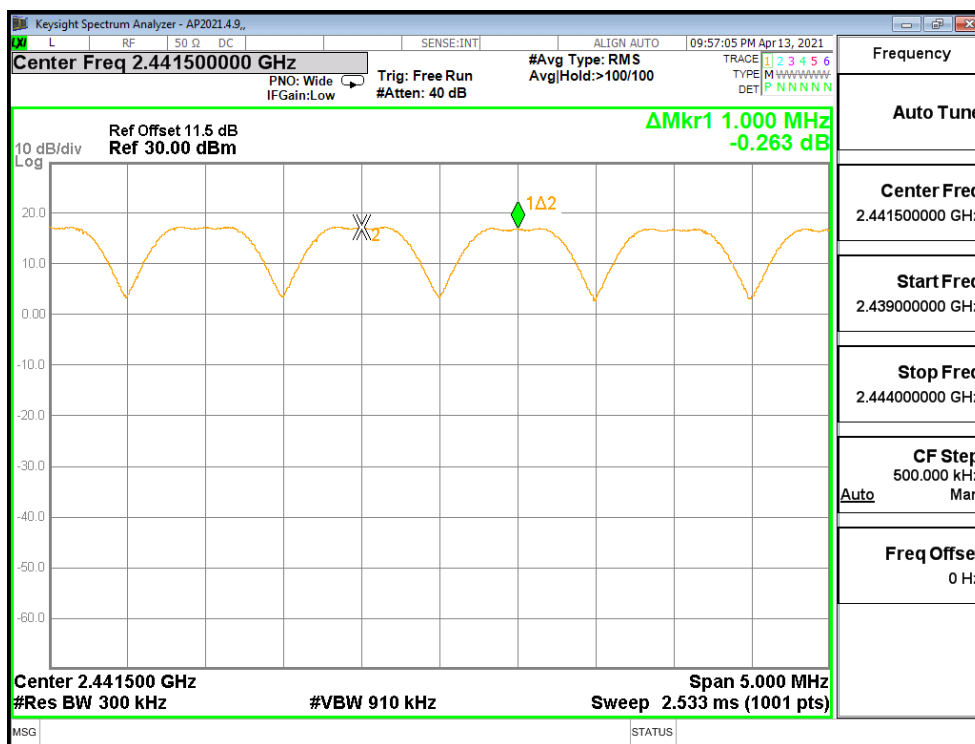

HOPPING FREQUENCY SEPARATION PLOT

### 9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

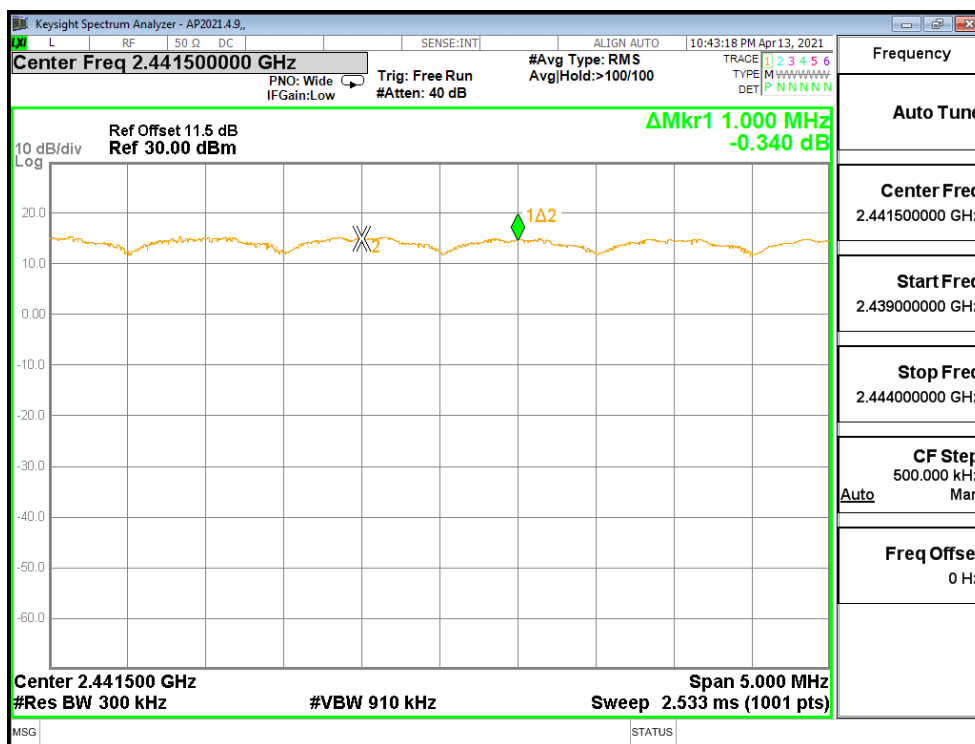

HOPPING FREQUENCY SEPARATION PLOT

---

## **9.4. NUMBER OF HOPPING CHANNELS**

### **LIMITS**

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


### **RESULTS**

Normal Mode: All Channels Observed


### 9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

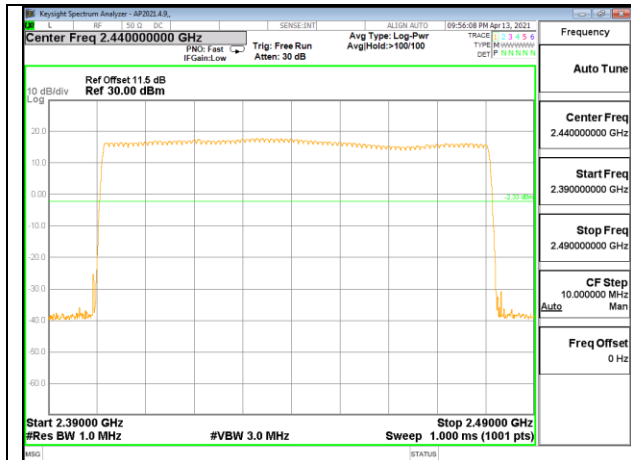


100 MHz Span

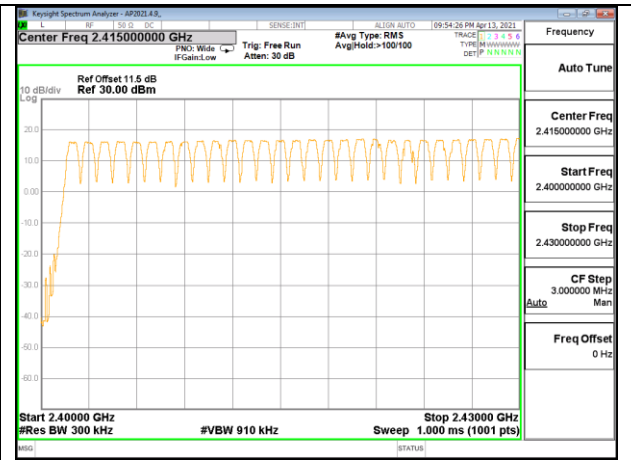

30MHz SPAN, SEGMENT 1 OF 3

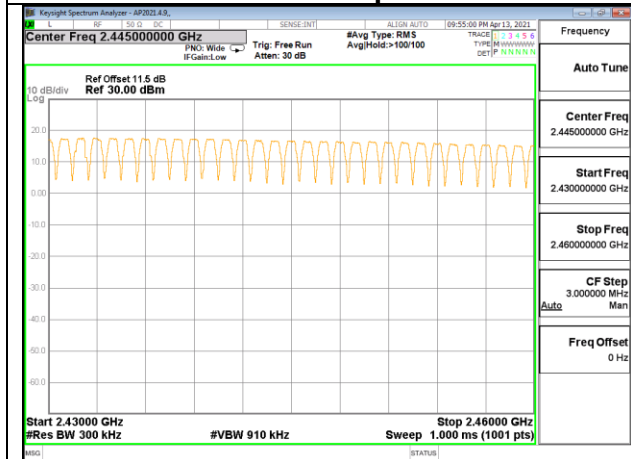


30MHz SPAN, SEGMENT 2 OF 3

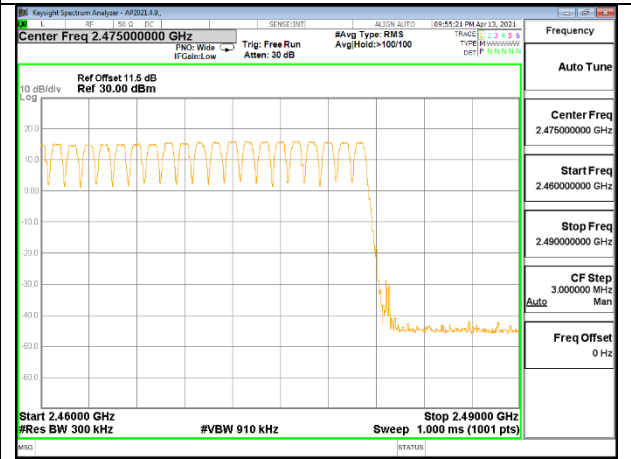


30MHz SPAN, SEGMENT 3 OF 3




### 9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

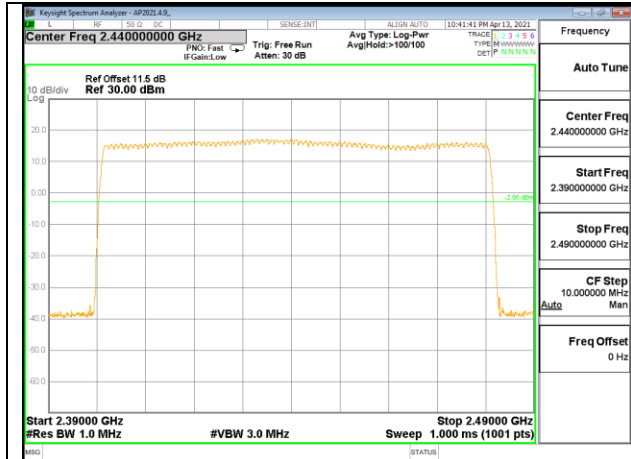


100 MHz Span

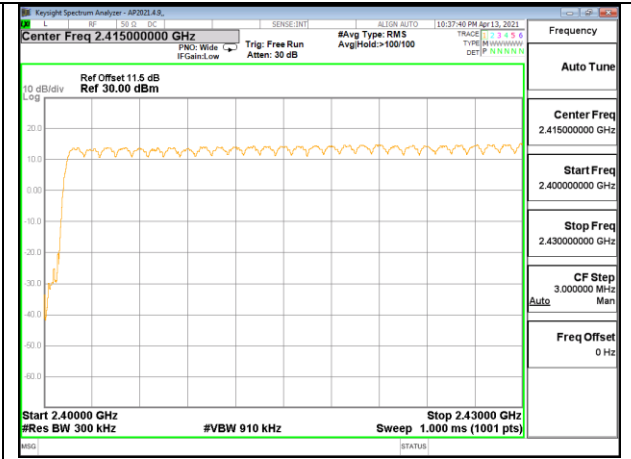

30MHz SPAN, SEGMENT 1 OF 3

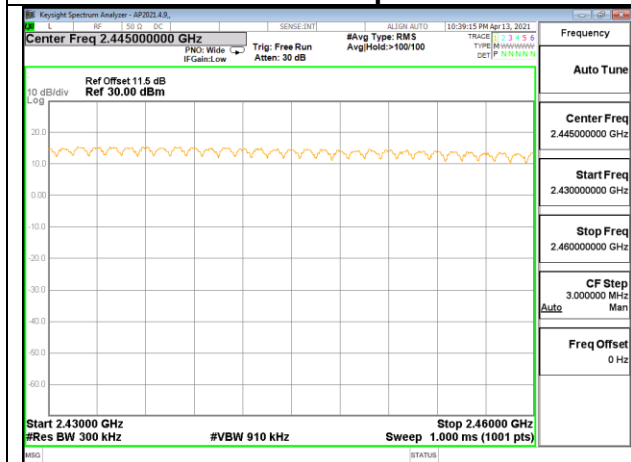

30MHz SPAN, SEGMENT 2 OF 3

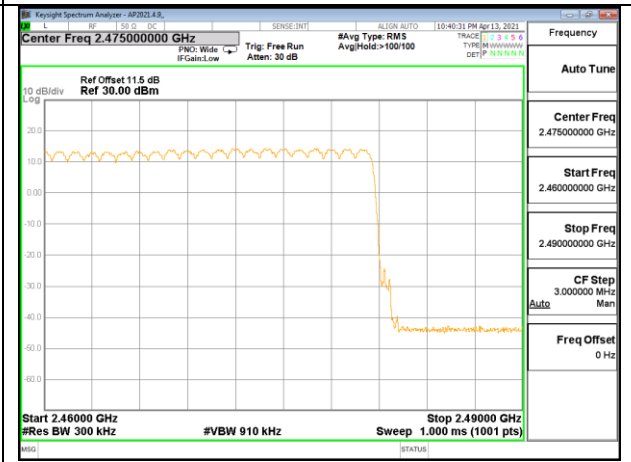

30MHz SPAN, SEGMENT 3 OF 3

---

## **9.5. AVERAGE TIME OF OCCUPANCY**

### **LIMITS**

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 3.16 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$ .

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels \* 0.4 seconds) is equal to  $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$ .

### **RESULTS**

### 9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION


| DH Packet   | Pulse Width [msec] | Number of Pulses in 3.16 seconds | Average Time of Occupancy [sec] | Limit [sec] | Margin [sec] |
|-------------|--------------------|----------------------------------|---------------------------------|-------------|--------------|
| GFSK Normal |                    |                                  |                                 |             |              |
| DH1         | 0.386              | 32                               | 0.123520                        | 0.4         | -0.2765      |
| DH3         | 1.638              | 16                               | 0.262080                        | 0.4         | -0.1379      |
| DH5         | 2.884              | 11                               | 0.317240                        | 0.4         | -0.0828      |
| GFSK AFH    |                    |                                  |                                 |             |              |
| DH Packet   | Pulse Width [msec] | Number of Pulses in 0.8 seconds  | Average Time of Occupancy [sec] | Limit [sec] | Margin [sec] |
| GFSK AFH    |                    |                                  |                                 |             |              |
| DH1         | 0.386              | 8                                | 0.030880                        | 0.4         | -0.3691      |
| DH3         | 1.638              | 4                                | 0.065520                        | 0.4         | -0.3345      |
| DH5         | 2.884              | 2.75                             | 0.079310                        | 0.4         | -0.3207      |

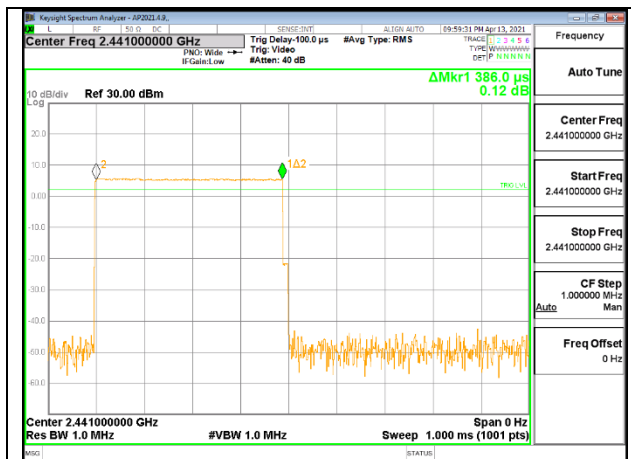

**PULSE WIDTH – DH1**




**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1**

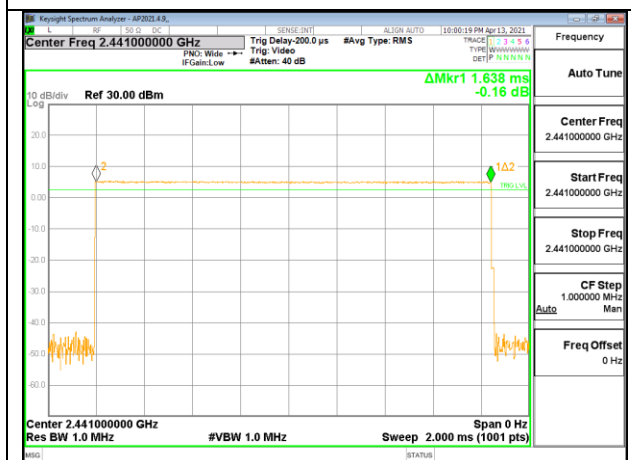


**PULSE WIDTH – DH3**



**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3**

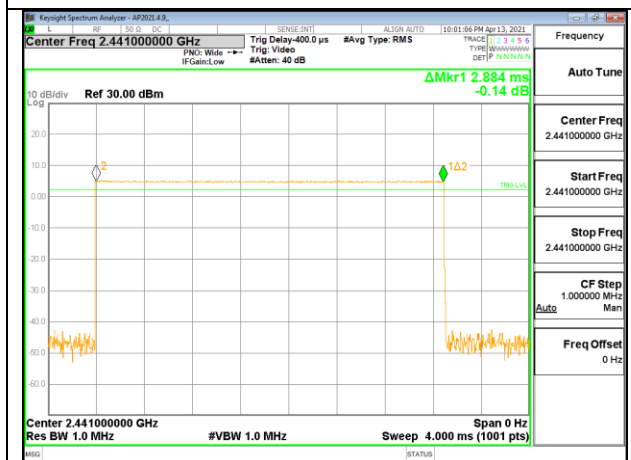


**PULSE WIDTH – DH5**

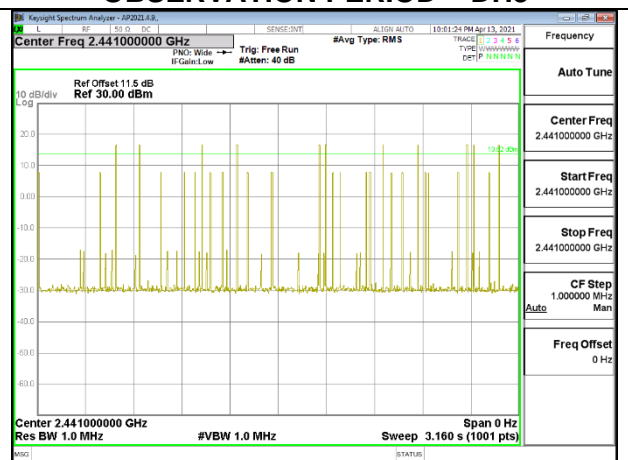


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5**

### 9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION


| DH Packet   | Pulse Width [msec] | Number of Pulses in 3.16 seconds | Average Time of Occupancy [sec] | Limit [sec] | Margin [sec] |
|-------------|--------------------|----------------------------------|---------------------------------|-------------|--------------|
| 8PSK Normal |                    |                                  |                                 |             |              |
| DH1         | 0.390              | 31                               | 0.120900                        | 0.4         | -0.2791      |
| DH3         | 1.640              | 18                               | 0.295200                        | 0.4         | -0.1048      |
| DH5         | 2.884              | 10                               | 0.288400                        | 0.4         | -0.1116      |
| 8PSK AFH    |                    |                                  |                                 |             |              |
| DH Packet   | Pulse Width [msec] | Number of Pulses in 0.8 seconds  | Average Time of Occupancy [sec] | Limit [sec] | Margin [sec] |
| 8PSK AFH    |                    |                                  |                                 |             |              |
| DH1         | 0.390              | 7.75                             | 0.030225                        | 0.4         | -0.3698      |
| DH3         | 1.640              | 4.5                              | 0.073800                        | 0.4         | -0.3262      |
| DH5         | 2.884              | 2.5                              | 0.072100                        | 0.4         | -0.3279      |

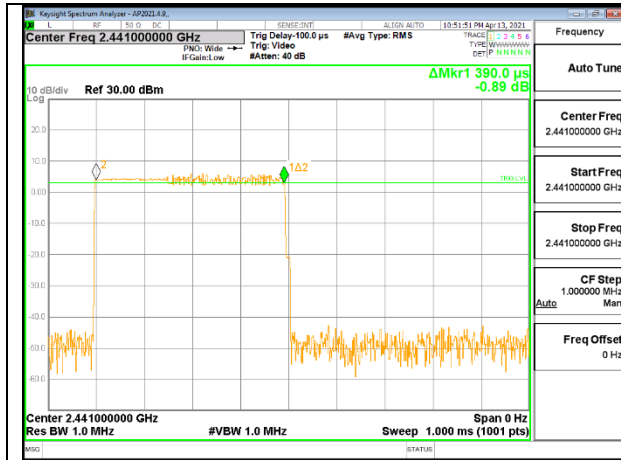


**PULSE WIDTH – 3-DH1**

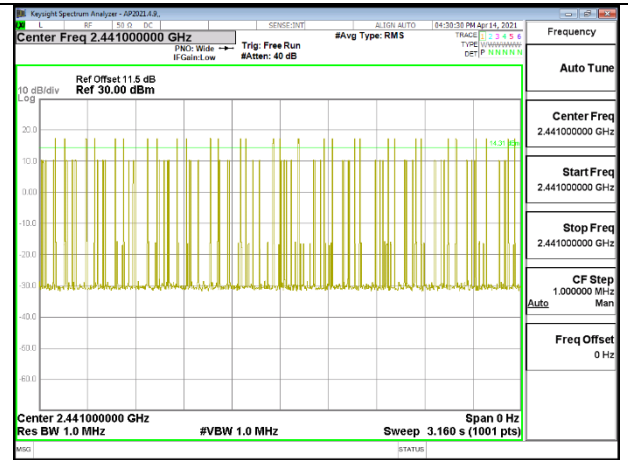


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3-DH1**

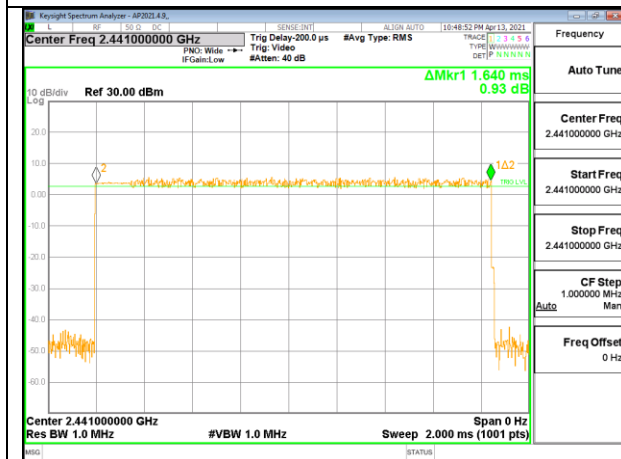

**PULSE WIDTH – 3-DH3**

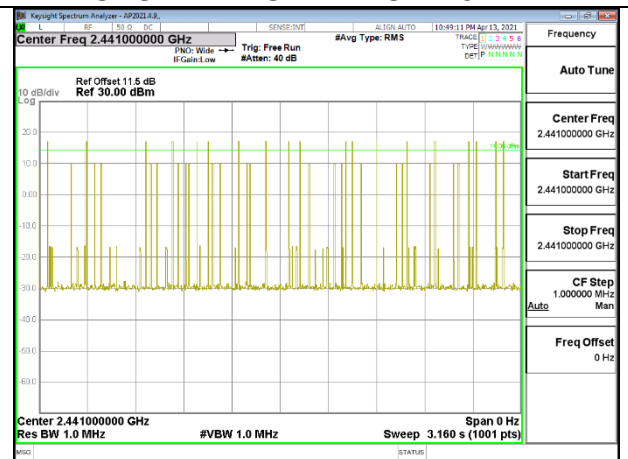

**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3-DH3**

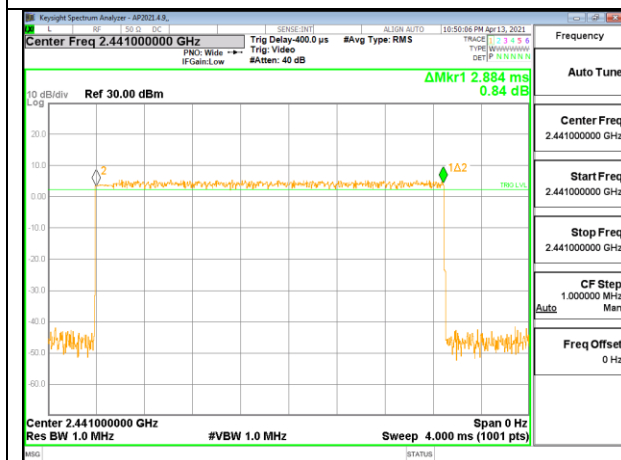

**PULSE WIDTH – 3-DH5**



**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – 3-DH5**

## 9.6. OUTPUT POWER

### LIMITS

§15.247 (b) (1)

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

### RESULTS

#### 9.6.1. BASIC DATA RATE GFSK MODULATION

| Channel | Frequency [MHz] | Peak Output Power [dBm] | Limit [dBm]   | Margin [dB]   |
|---------|-----------------|-------------------------|---------------|---------------|
| Low     | 2 402           | 16.464                  | 21.000        | -4.536        |
| Mid     | 2 441           | <b>17.696</b>           | <b>21.000</b> | <b>-3.304</b> |
| High    | 2 480           | 16.300                  | 21.000        | -4.700        |
| Worst   |                 | 17.696                  | 21.000        | -3.304        |

#### 9.6.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION


| Channel | Frequency [MHz] | Peak Output Power [dBm] | Limit [dBm]   | Margin [dB]   |
|---------|-----------------|-------------------------|---------------|---------------|
| Low     | 2 402           | 16.094                  | 21.000        | -4.906        |
| Mid     | 2 441           | <b>17.893</b>           | <b>21.000</b> | <b>-3.107</b> |
| High    | 2 480           | 16.871                  | 21.000        | -4.129        |
| Worst   |                 | 17.893                  | 21.000        | -3.107        |

#### 9.6.3. ENHANCED DATA RATE 8PSK MODULATION


| Channel | Frequency [MHz] | Peak Output Power [dBm] | Limit [dBm]   | Margin [dB]   |
|---------|-----------------|-------------------------|---------------|---------------|
| Low     | 2 402           | 16.691                  | 21.000        | -4.309        |
| Mid     | 2 441           | <b>18.517</b>           | <b>21.000</b> | <b>-2.483</b> |
| High    | 2 480           | 17.570                  | 21.000        | -3.430        |
| Worst   |                 | 18.517                  | 21.000        | -2.483        |

### 9.6.4. OUTPUT POWER PLOTS

#### PEAK OUTPUT POWER

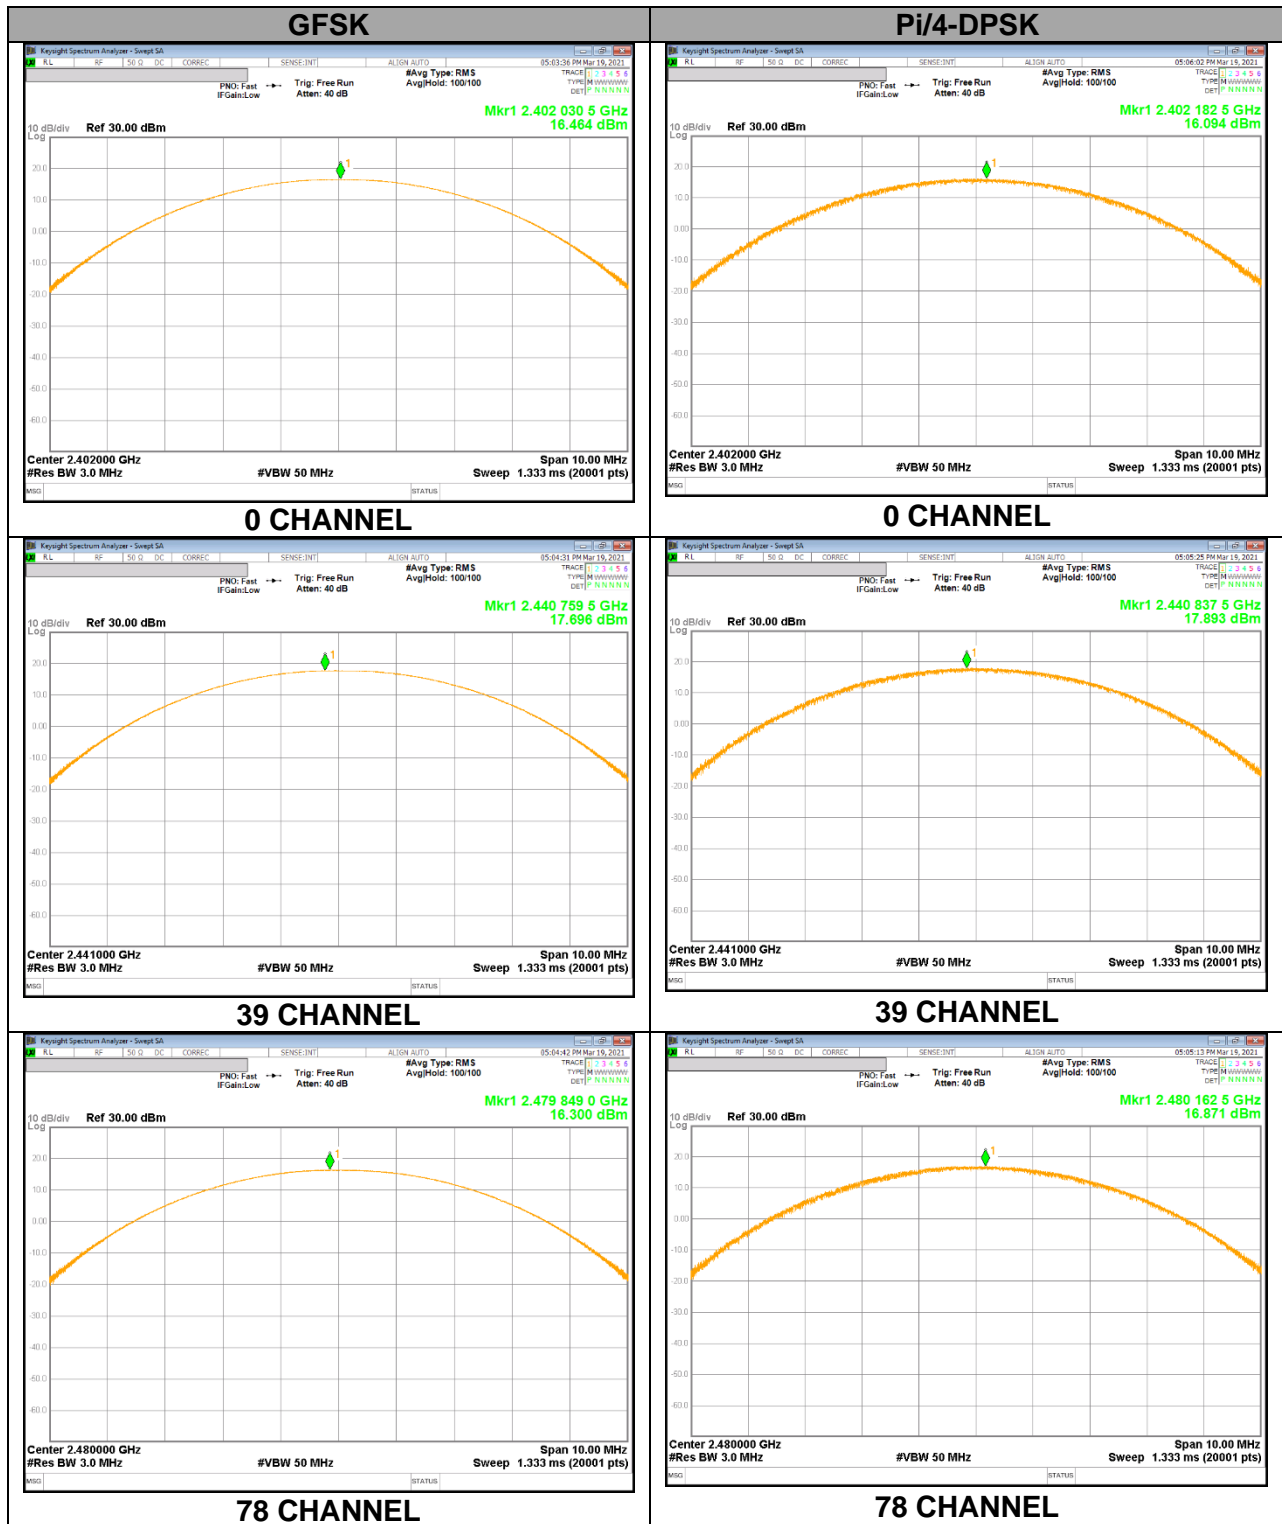



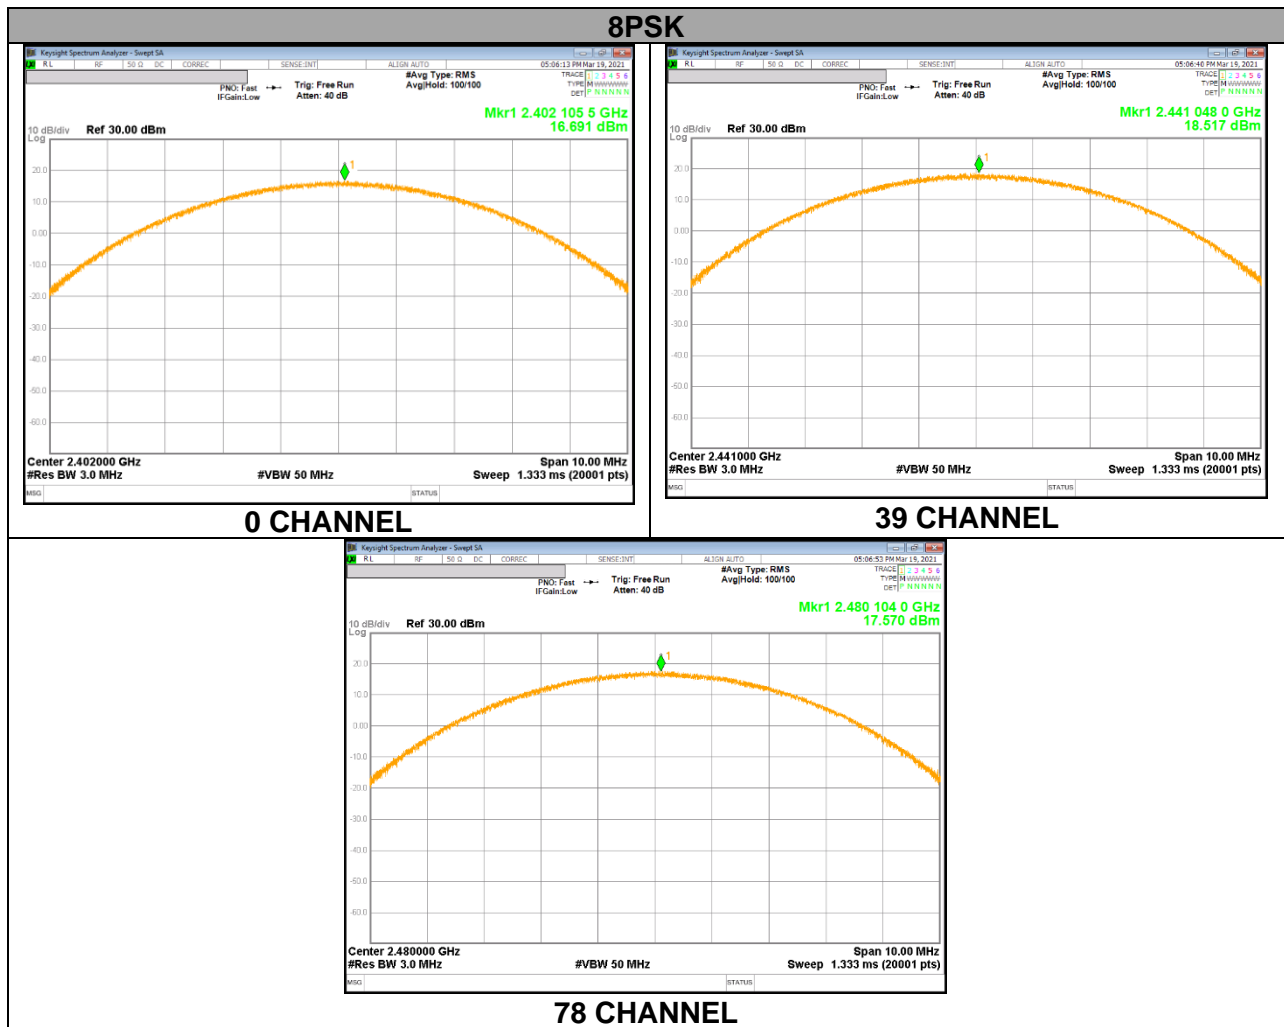

## 9.7. AVERAGE POWER

### LIMITS

None; for reporting purposes only

### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.  
 The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

### RESULTS

#### 9.7.1. BASIC DATA RATE GFSK MODULATION

| Channel | Frequency [MHz] | AV power [dBm] | AV power [mW] |
|---------|-----------------|----------------|---------------|
| Low     | 2 402           | 15.990         | 39.719        |
| Middle  | 2 441           | <b>17.261</b>  | <b>53.223</b> |
| High    | 2 480           | 15.855         | 38.503        |

#### 9.7.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION

| Channel | Frequency [MHz] | AV power [dBm] | AV power [mW] |
|---------|-----------------|----------------|---------------|
| Low     | 2 402           | 13.567         | 22.735        |
| Middle  | 2 441           | <b>15.450</b>  | <b>35.075</b> |
| High    | 2 480           | 14.413         | 27.625        |

#### 9.7.3. ENHANCED DATA RATE 8PSK MODULATION

| Channel | Frequency [MHz] | AV power [dBm] | AV power [mW] |
|---------|-----------------|----------------|---------------|
| Low     | 2 402           | 13.573         | 22.767        |
| Middle  | 2 441           | <b>15.473</b>  | <b>35.261</b> |
| High    | 2 480           | 14.441         | 27.804        |

## **9.8. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

Limit = -20 dBc

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The band-edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


### **RESULTS**

## 9.8.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

### SPURIOUS EMISSIONS, NON-HOPPING

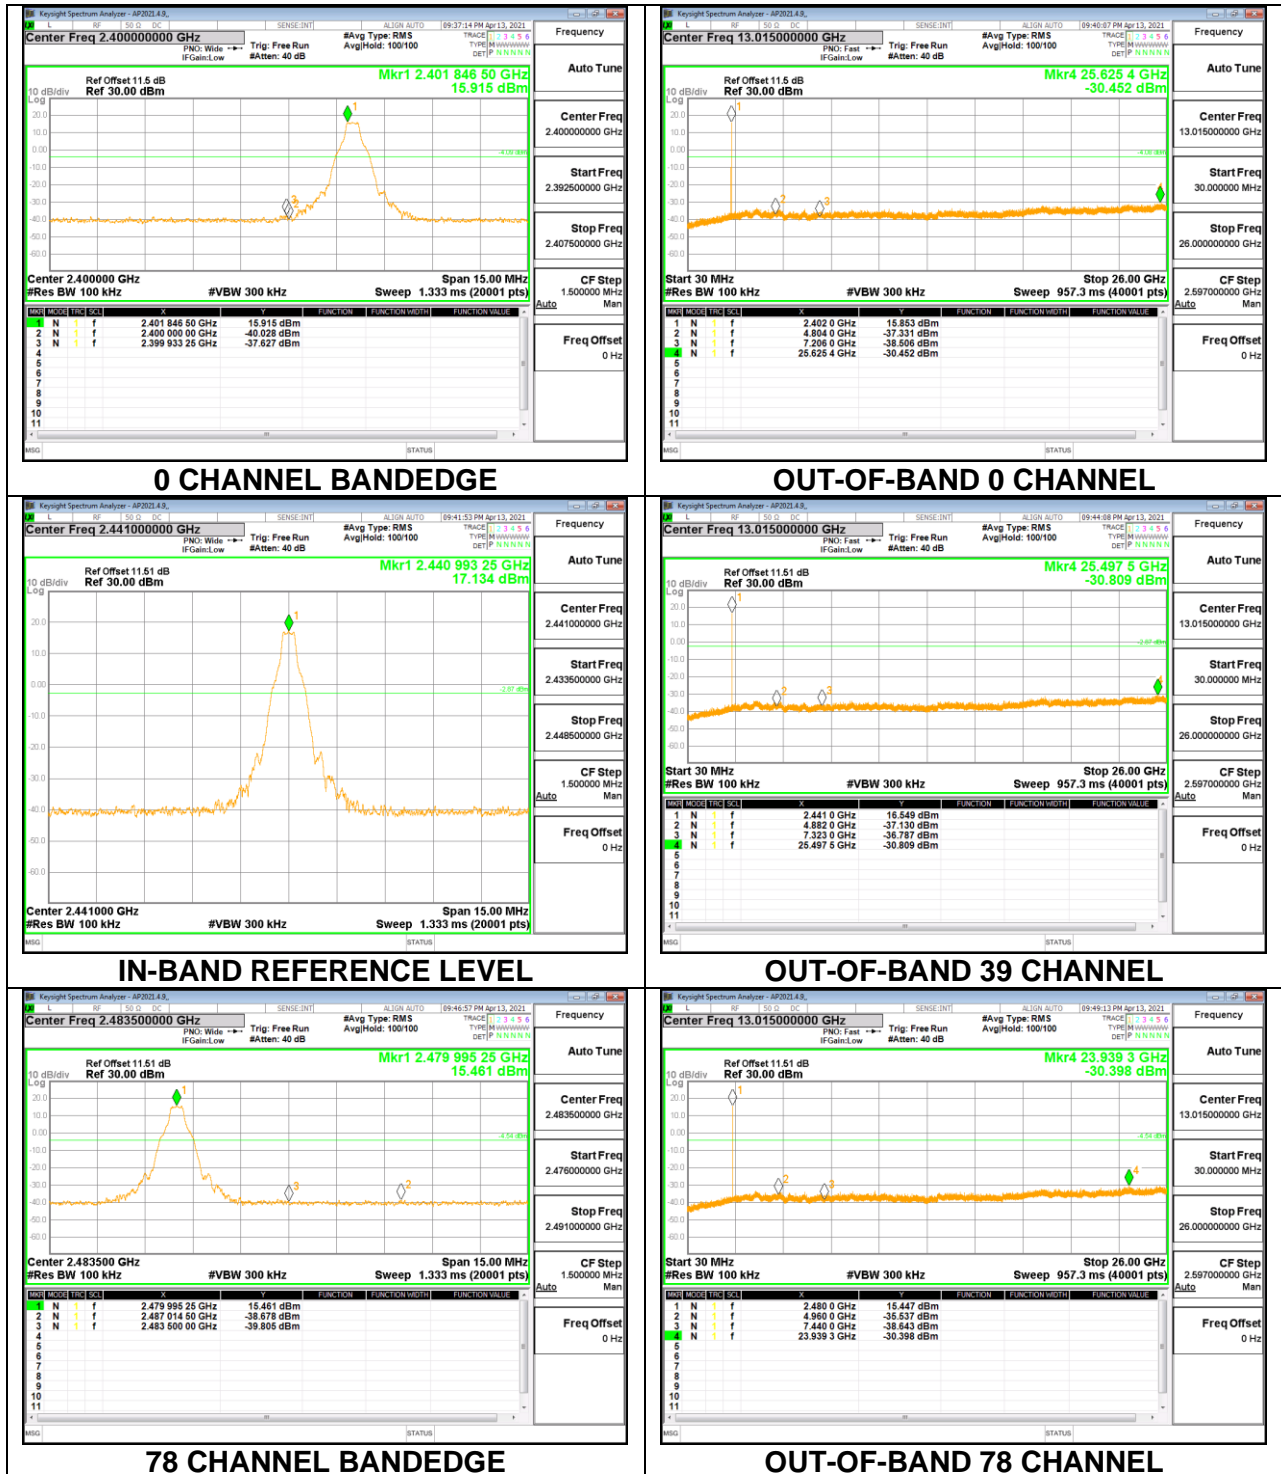


**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

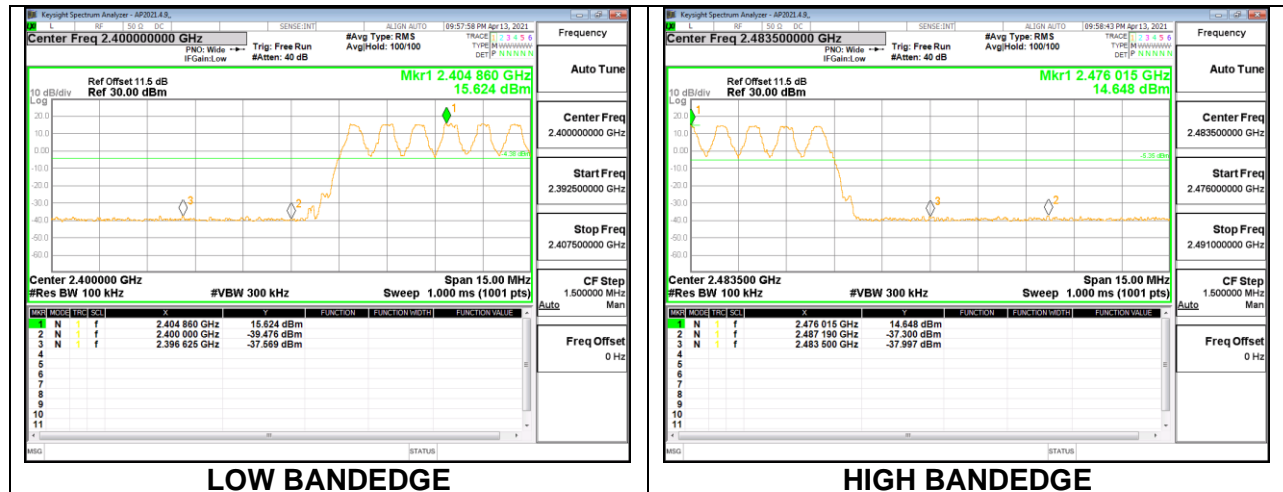


## 9.8.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

### SPURIOUS EMISSIONS, NON-HOPPING

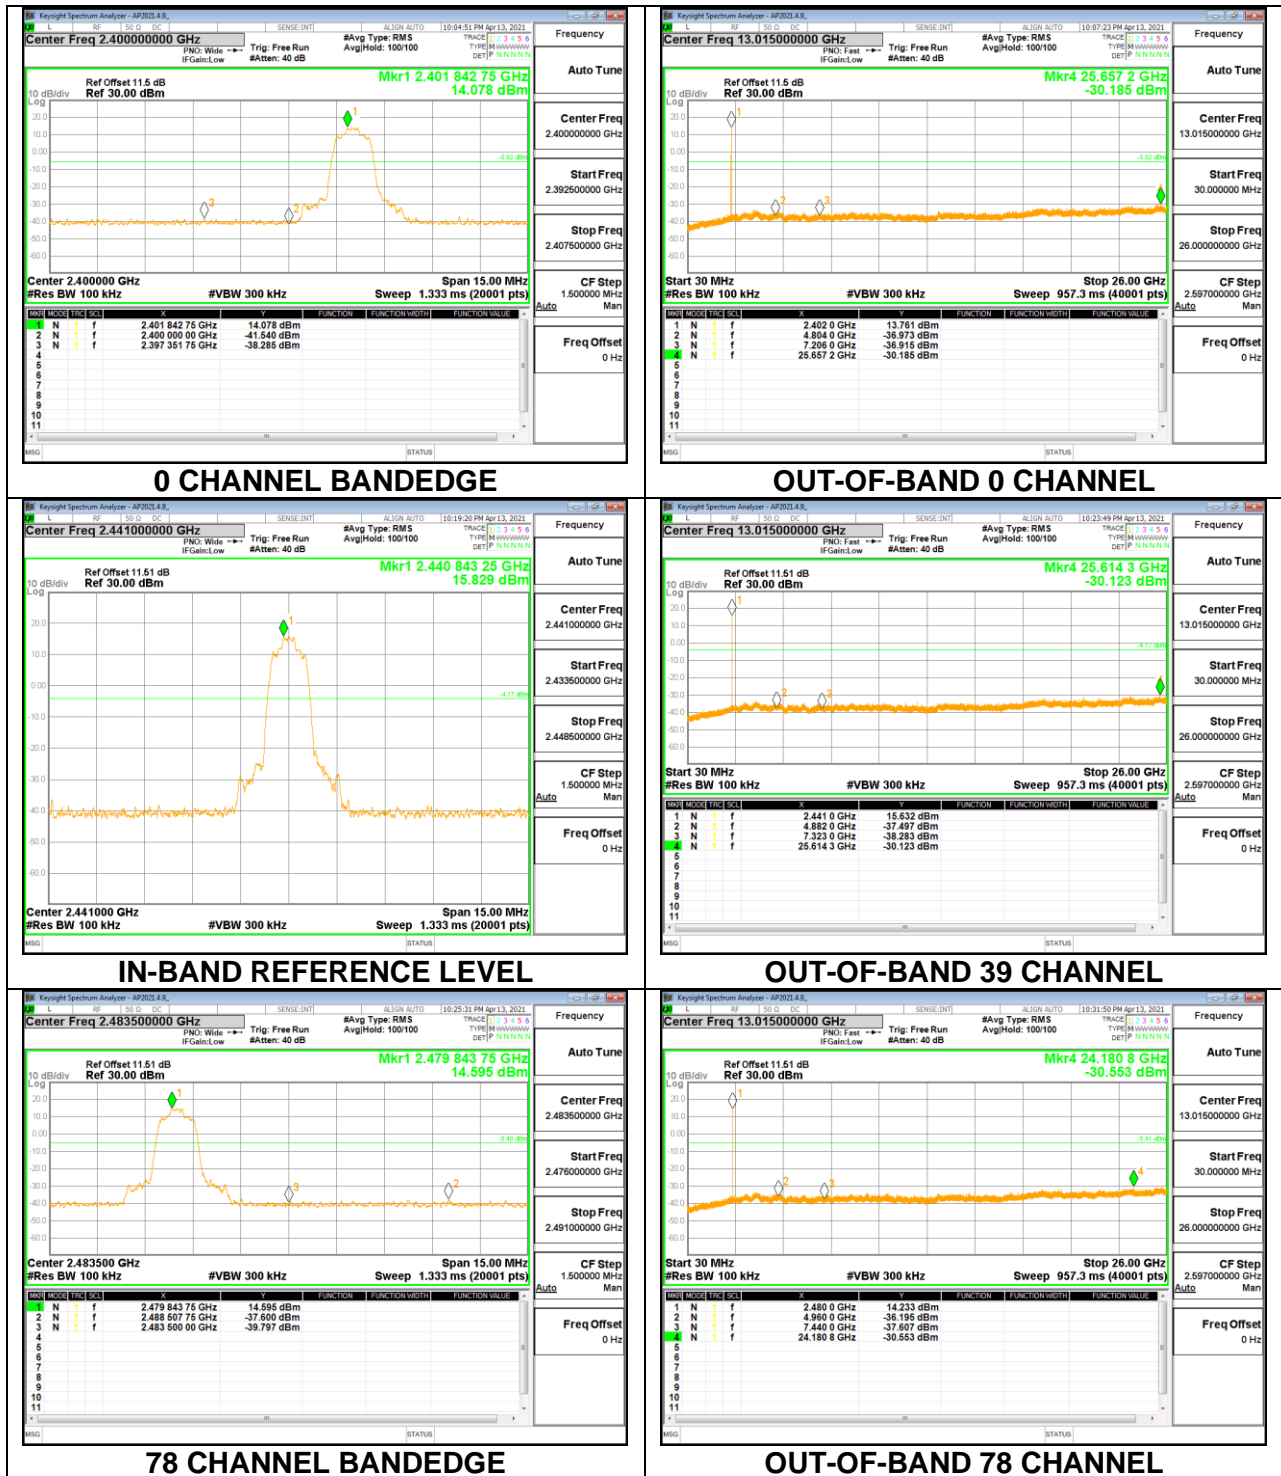

**SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON**

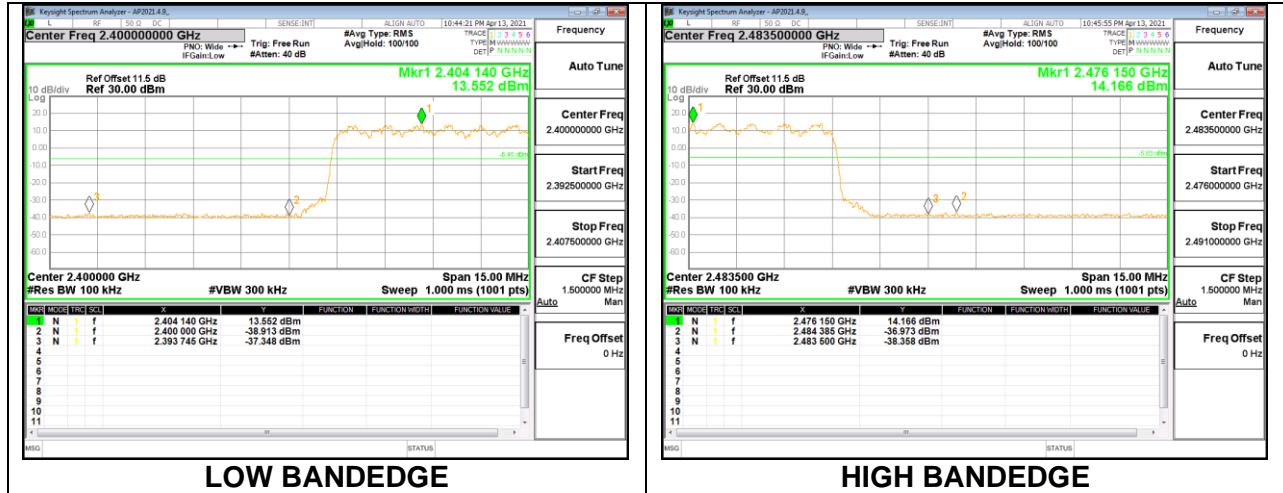

## 10. RADIATED TEST RESULTS

### LIMITS

FCC §15.205 and §15.209

| Limits for radiated disturbance of an intentional radiator |                 |                          |
|--|-----------------|--------------------------|
| Frequency range (MHz)                                      | Limits (µV/m)   | Measurement Distance (m) |
| 0.009 – 0.490  | 2400 / F (kHz)  | 300                      |
| 0.490 – 1.705  | 24000 / F (kHz) | 30                       |
| 1.705 – 30.0   | 30              | 30                       |
| 30 – 88  | 100**           | 3                        |
| 88 - 216   | 150**           | 3                        |
| 216 – 960  | 200**           | 3                        |
| Above 960  | 500             | 3                        |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

FCC Part 15.205 (a) : Only spurious emissions are permitted in any of the frequency bands listed below :

| MHz               | MHz                 | MHz            | MHz             | GHz          | GHz           |
|-------------------|---------------------|----------------|-----------------|--------------|---------------|
| 0.009 – 0.110     | 8.41425 ~ 8.41475   | 108 ~ 121.94   | 1300 ~ 1427     | 4.5 ~ 5.15   | 14.47 ~ 14.5  |
| 0.495 – 0.505     | 12.29 ~ 12.293      | 123 ~ 138      | 1435 ~ 1626.5   | 5.35 ~ 5.46  | 15.35 ~ 16.2  |
| 2.1735 ~ 2.1905   | 12.51975 ~ 12.52025 | 149.9 ~ 150.05 | 1645.5 ~ 1646.5 | 7.25 ~ 7.75  | 17.7 ~ 21.4   |
| 4.125 ~ 4.128     | 12.57675 ~ 12.57725 | 156.52475 ~    | 1660 ~ 1710     | 8.025 ~ 8.5  | 22.01 ~ 23.12 |
| 4.17725 ~ 4.17775 | 13.36 ~ 13.41       | 156.52525      | 1718.8 ~ 1722.2 | 9.0 ~ 9.2    | 23.6 ~ 24.0   |
| 4.20725 ~ 4.20775 | 16.42 ~ 16.423      | 156.7 ~ 156.9  | 2200 ~ 2300     | 9.3 ~ 9.5    | 31.2 ~ 31.8   |
| 6.215 ~ 6.218     | 16.69475 ~ 16.69525 | 162.0125 ~     | 2310 ~ 2390     | 10.6 ~ 12.7  | 36.43 ~ 36.5  |
| 6.26775 ~ 6.26825 | 16.80425 ~ 16.80475 | 167.17         | 2483.5 ~ 2500   | 13.25 ~ 13.4 | Above 38.6    |
| 6.31175 ~ 6.31225 | 25.5 ~ 25.67        | 167.72 ~ 173.2 | 2655 ~ 2900     |              |               |
| 8.291 ~ 8.294     | 37.5 ~ 38.25        | 240 ~ 285      | 3260 ~ 3267     |              |               |
| 8.362 ~ 8.366     | 73 ~ 74.6           | 322 ~ 335.4    | 3332 ~ 3339     |              |               |
| 8.37625 ~ 8.38675 | 74.8 ~ 75.2         | 399.90 ~ 410   | 3345.8 ~ 3358   |              |               |
|                   |                     | 608 ~ 614      | 3600 ~ 4400     |              |               |
|                   |                     | 960 ~ 1240     |                 |              |               |

▪ FCC Part 15.205(b) : The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.



---

**TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements.(Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.)

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1/T (on time) for average measurement.

$$\text{GFSK} = 1/T = 1 / 0.00289\text{s} = 346\text{Hz}.$$

The minimum VBW was 346Hz, but test receiver(ESU40) couldn't set value 347Hz. Due to this reason, testing VBW was set to 500Hz(Worst cases).

The spectrum from 1GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.  
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9kHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).  
Per FCC part 15.31(o), test results were not reported.


Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open are test site.  
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.

## 10.1. TRANSMITTER ABOVE 1 GHz

### 10.1.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

#### BANDEDGE (0 CHANNEL)

#### HORIZONTAL RESULT

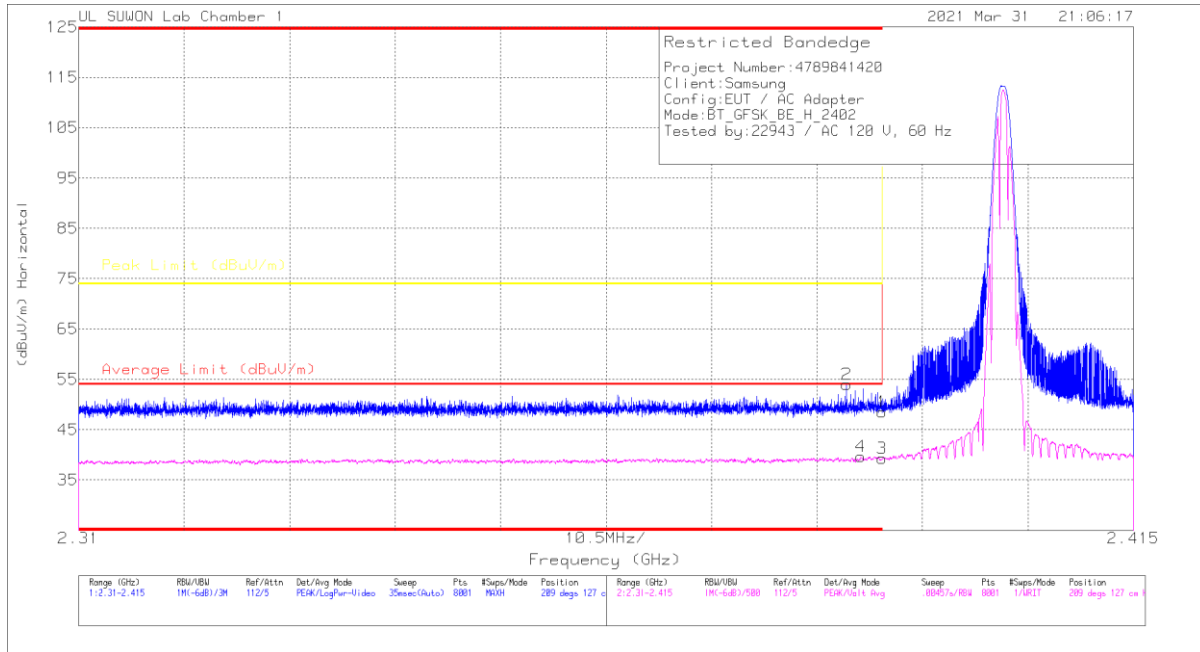


#### Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | 3117_00168717 | 10dB_ATT[dB] | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 42.32                | Pk   | 31.8          | -25.6        | 48.52                      | -                      | -           | 74                  | -25.48         | 209            | 127         | H        |
| 2      | * 2.38645       | 47.83                | Pk   | 31.8          | -25.6        | 54.03                      | -                      | -           | 74                  | -19.97         | 209            | 127         | H        |
| 3      | * 2.39          | 33.04                | VA1T | 31.8          | -25.6        | 39.24                      | 54                     | -14.76      | -                   | -              | 209            | 127         | H        |
| 4      | * 2.38786       | 33.31                | VA1T | 31.8          | -25.5        | 39.61                      | 54                     | -14.39      | -                   | -              | 209            | 127         | H        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 VA1T - FHSS: Linear Voltage Average  $VB=1/Ton$  where: Ton is transmit duration

### VERTICAL RESULT

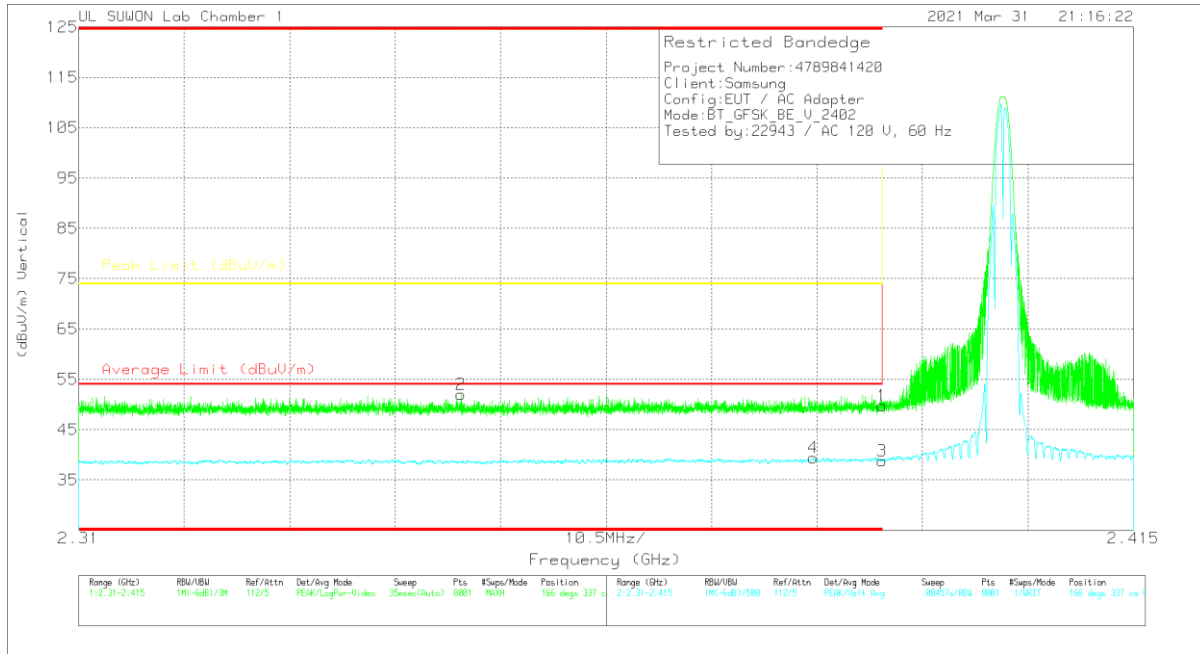


### Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | 3117_00168717 | 10dB_ATT[dB] | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 43.58                | Pk   | 31.8          | -25.6        | 49.78                      | -                      | -           | 74                  | -24.22         | 166            | 337         | V        |
| 2      | * 2.34802       | 45.98                | Pk   | 31.7          | -25.7        | 51.98                      | -                      | -           | 74                  | -22.02         | 166            | 337         | V        |
| 3      | * 2.39          | 32.57                | VA1T | 31.8          | -25.6        | 38.77                      | 54                     | -15.23      | -                   | -              | 166            | 337         | V        |
| 4      | * 2.38309       | 33.13                | VA1T | 31.8          | -25.5        | 39.43                      | 54                     | -14.57      | -                   | -              | 166            | 337         | V        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

**BANDEDGE (78 CHANNEL)**

**HORIZONTAL RESULT**

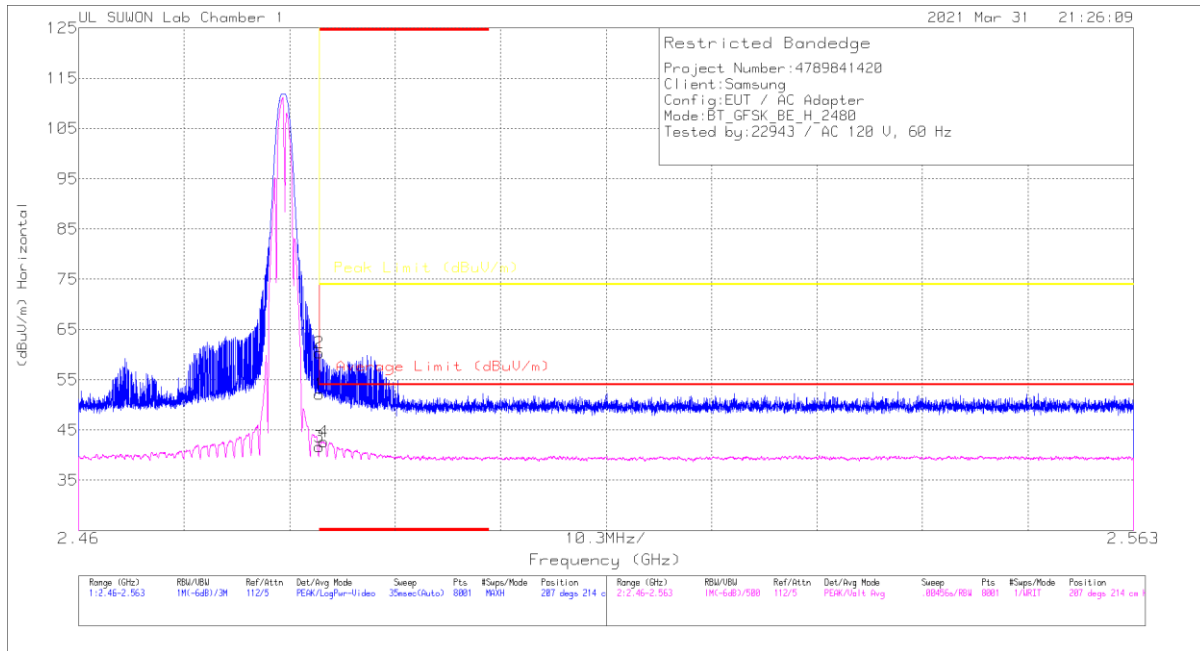


**Trace Markers**

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | 3117_00168717 | 10dB_ATT[dB] | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.48351       | 45.48                | Pk   | 32            | -25.3        | 52.18                      | -                      | -           | 74                  | -21.82         | 207            | 214         | H        |
| 2      | * 2.48352       | 53.66                | PK   | 32            | -25.3        | 60.36                      | -                      | -           | 74                  | -13.64         | 207            | 214         | H        |
| 3      | * 2.48351       | 34.9                 | VA1T | 32            | -25.3        | 41.6                       | 54                     | -12.4       | -                   | -              | 207            | 214         | H        |
| 4      | * 2.48391       | 35.99                | VA1T | 32            | -25.3        | 42.69                      | 54                     | -11.31      | -                   | -              | 207            | 214         | H        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

### VERTICAL RESULT

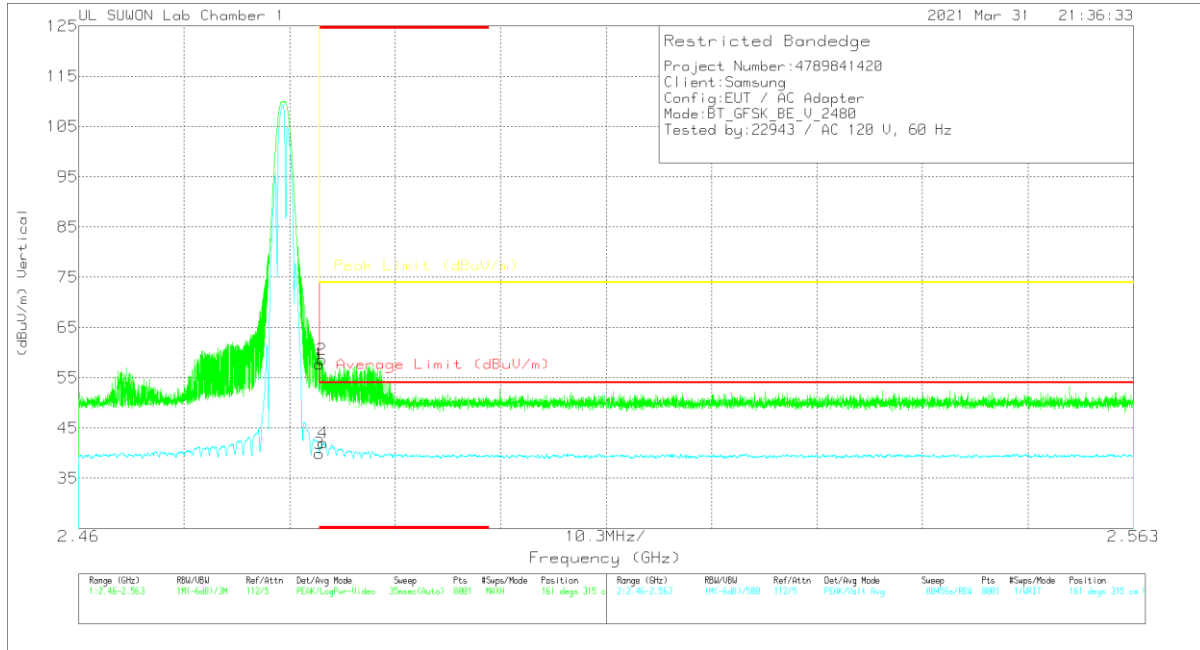


### Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | 3117_00168717 | 10dB_ATT[dB] | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.48351       | 50.98                | Pk   | 32            | -25.3        | 57.68                      | -                      | -           | 74                  | -16.32         | 161            | 315         | V        |
| 2      | * 2.48375       | 51.88                | Pk   | 32            | -25.3        | 58.58                      | -                      | -           | 74                  | -15.42         | 161            | 315         | V        |
| 3      | * 2.48351       | 33.22                | VA1T | 32            | -25.3        | 39.92                      | 54                     | -14.08      | -                   | -              | 161            | 315         | V        |
| 4      | * 2.48387       | 35.3                 | VA1T | 32            | -25.3        | 42                         | 54                     | -12         | -                   | -              | 161            | 315         | V        |


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

# HARMONICS AND SPURIOUS EMISSIONS

## 0 CHANNEL RESULTS

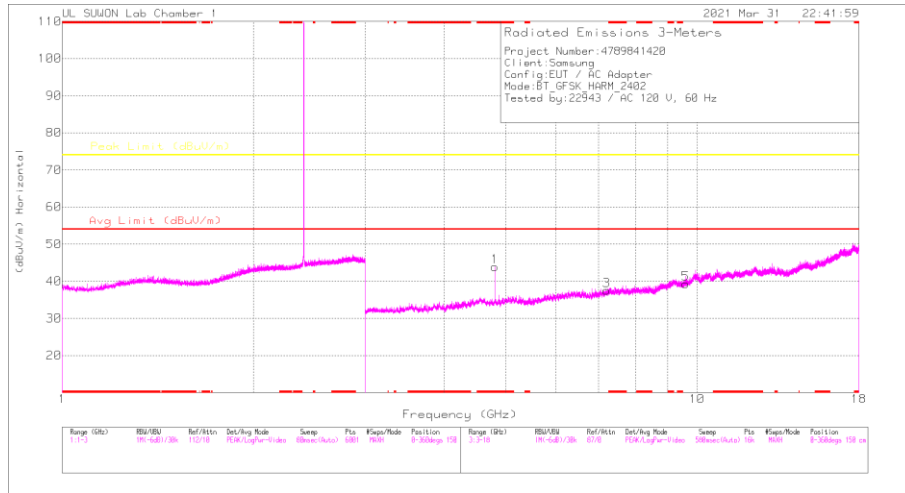

**HORIZONTAL**

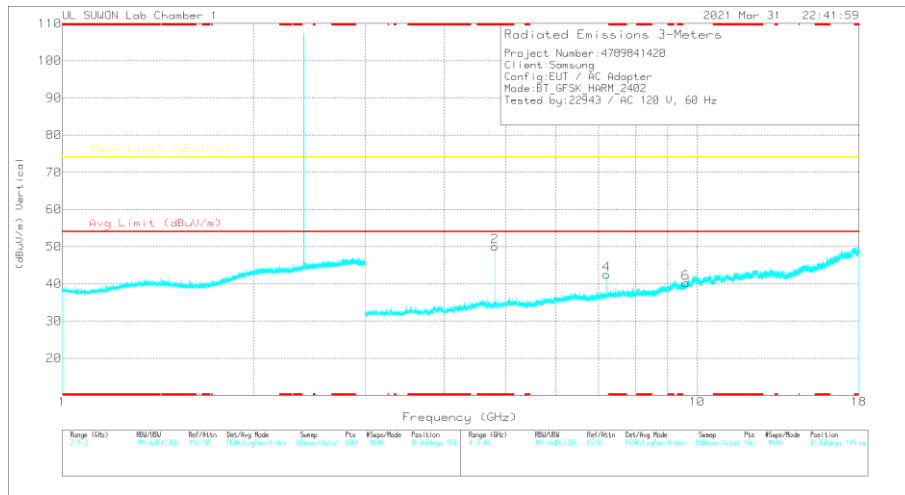


**VERTICAL**

## RADIATED EMISSIONS


| Frequency (GHz) | Meter Reading (dBuV) | Det  | 3117_0016871 7 | 3GHz_HP[dB] | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|-------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| * 4.80378       | 46.12                | PKFH | 34.1           | -31.5       | 48.72                      | -                  | -           | 74                  | -25.28      | 55             | 124         | H        |
| * 4.80402       | 41.29                | VA1T | 34.1           | -31.5       | 43.89                      | 54                 | -10.11      | -                   | -           | 55             | 124         | H        |
| * 4.80424       | 48.47                | PKFH | 34.1           | -31.5       | 51.07                      | -                  | -           | 74                  | -22.93      | 37             | 151         | V        |
| * 4.80402       | 44.57                | VA1T | 34.1           | -31.5       | 47.17                      | 54                 | -6.83       | -                   | -           | 37             | 151         | V        |
| 7.19936         | 36.95                | PKFH | 35.9           | -27.7       | 45.15                      | -                  | -           | 74                  | -28.85      | 61             | 213         | H        |
| 7.2066          | 39.4                 | PKFH | 35.9           | -27.6       | 47.7                       | -                  | -           | 74                  | -26.3       | 296            | 144         | V        |
| 9.6108          | 33.6                 | PKFH | 37.1           | -23.1       | 47.6                       | -                  | -           | 74                  | -26.4       | 360            | 100         | H        |
| 9.60695         | 32.98                | PKFH | 37.1           | -23         | 47.08                      | -                  | -           | 74                  | -26.92      | 360            | 100         | V        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

### 39 CHANNEL RESULTS

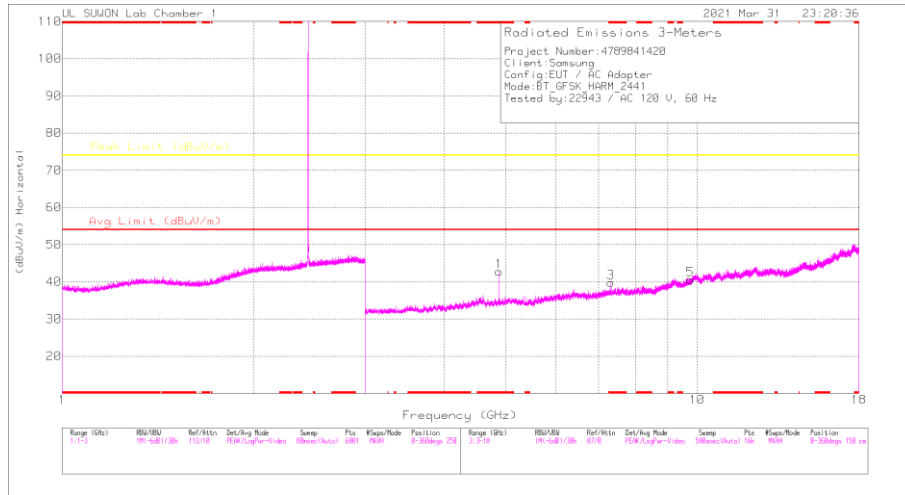

**HORIZONTAL**

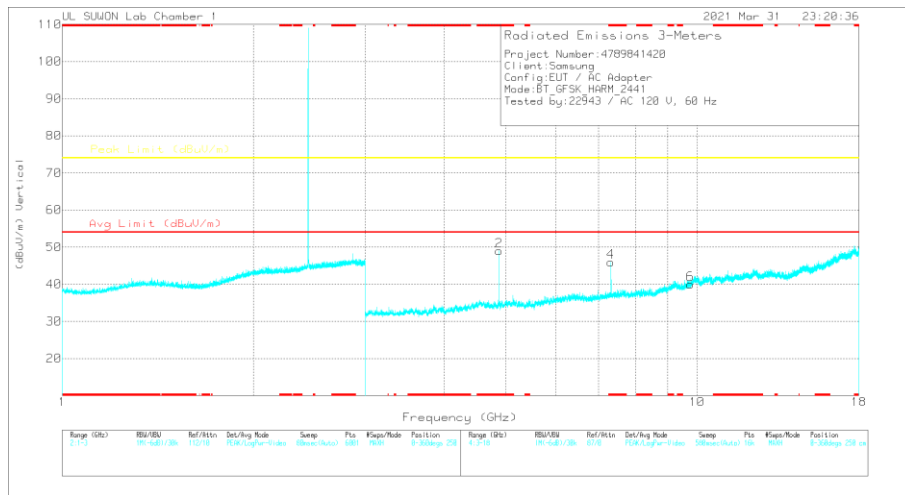


**VERTICAL**

### RADIATED EMISSIONS


| Frequency (GHz) | Meter Reading (dBuV) | Det  | 3117_0016871 7 | 3GHz_HP[dB] | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|-------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| * 4.88224       | 46.62                | PKFH | 34.1           | -31.4       | 49.32                      | -                  | -           | 74                  | -24.68      | 59             | 109         | H        |
| * 4.88194       | 40.31                | VA1T | 34.1           | -31.3       | 43.11                      | 54                 | -10.89      | -                   | -           | 59             | 109         | H        |
| * 4.88202       | 49.1                 | PKFH | 34.1           | -31.3       | 51.9                       | -                  | -           | 74                  | -22.1       | 150            | 199         | V        |
| * 4.8818        | 44.78                | VA1T | 34.1           | -31.3       | 47.58                      | 54                 | -6.42       | -                   | -           | 150            | 199         | V        |
| * 7.32238       | 38.48                | PKFH | 35.8           | -27.3       | 46.98                      | -                  | -           | 74                  | -27.02      | 66             | 150         | H        |
| * 7.3233        | 29.1                 | VA1T | 35.8           | -27.3       | 37.6                       | 54                 | -16.4       | -                   | -           | 66             | 150         | H        |
| * 7.32344       | 42.29                | PKFH | 35.8           | -27.3       | 50.79                      | -                  | -           | 74                  | -23.21      | 96             | 250         | V        |
| * 7.32302       | 36.21                | VA1T | 35.8           | -27.3       | 44.71                      | 54                 | -9.29       | -                   | -           | 96             | 250         | V        |
| 9.77061         | 33.03                | PKFH | 37.5           | -23.8       | 46.73                      | -                  | -           | 74                  | -27.27      | 0              | 100         | H        |
| 9.76315         | 32.81                | PKFH | 37.4           | -23.7       | 46.51                      | -                  | -           | 74                  | -27.49      | 0              | 100         | V        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

### 78 CHANNEL RESULTS

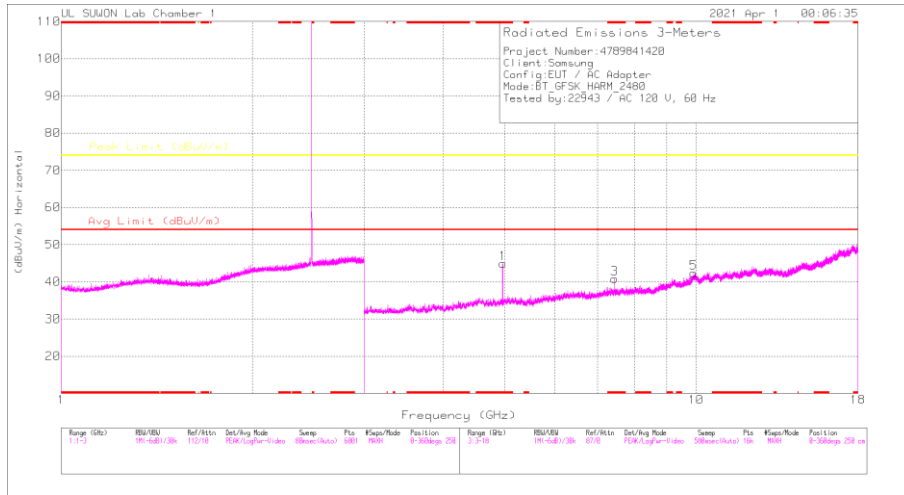

HORIZONTAL

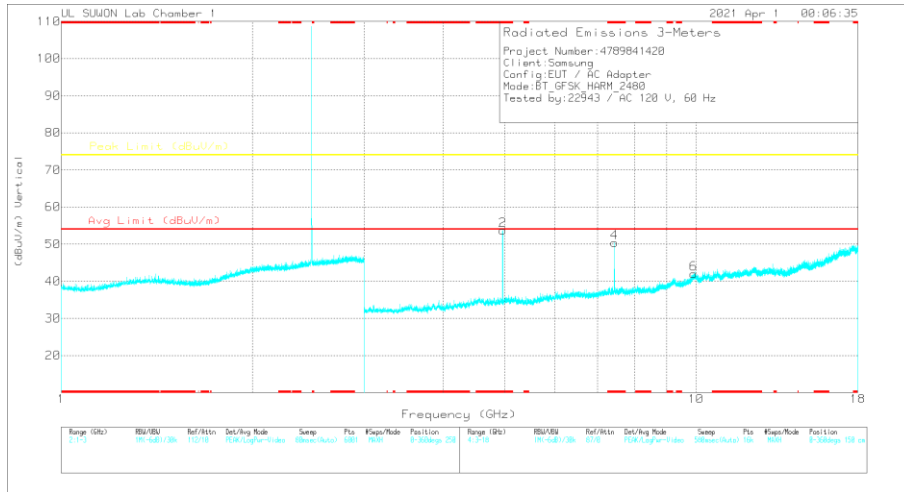

VERTICAL

### RADIATED EMISSIONS

| Frequency (GHz) | Meter Reading (dBuV) | Det  | 3117_0016871 7 | 3GHz_HP[dB] | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|-----------------|----------------------|------|----------------|-------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| * 4.95974       | 53.27                | PKFH | 34.1           | -31.4       | 55.97                      | -                  | -           | 74                  | -18.03      | 149            | 238         | V        |
| * 4.95974       | 53.27                | PKFH | 34.1           | -31.4       | **31.21                    | 54                 | -22.79      | -                   | -           | 149            | 238         | V        |
| * 4.95964       | 46.76                | PKFH | 34.1           | -31.4       | 49.46                      | -                  | -           | 74                  | -24.54      | 204            | 167         | H        |
| * 4.96002       | 42.87                | VA1T | 34.1           | -31.4       | 45.57                      | 54                 | -8.43       | -                   | -           | 204            | 167         | H        |
| * 7.4404        | 43.74                | PKFH | 35.8           | -26.8       | 52.74                      | -                  | -           | 74                  | -21.26      | 289            | 326         | V        |
| * 7.43998       | 38.04                | VA1T | 35.8           | -26.8       | 47.04                      | 54                 | -6.96       | -                   | -           | 289            | 326         | V        |
| * 7.4406        | 39.99                | PKFH | 35.8           | -26.8       | 48.99                      | -                  | -           | 74                  | -25.01      | 222            | 387         | H        |
| * 7.43998       | 32.61                | VA1T | 35.8           | -26.8       | 41.61                      | 54                 | -12.39      | -                   | -           | 222            | 387         | H        |
| 9.92171         | 32.72                | PKFH | 37.7           | -21.5       | 48.92                      | -                  | -           | 74                  | -25.08      | 360            | 100         | H        |
| 9.91975         | 32.53                | PKFH | 37.7           | -21.6       | 48.63                      | -                  | -           | 74                  | -25.37      | 360            | 100         | V        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

\*\* Data subtracted from the peak value:  $20\log(2*2.890\text{ms}/100\text{ms}) = -24.76 \text{ dB}$

PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak


VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration



## 10.1.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

### BANDEDGE (0 CHANNEL)

#### HORIZONTAL RESULT

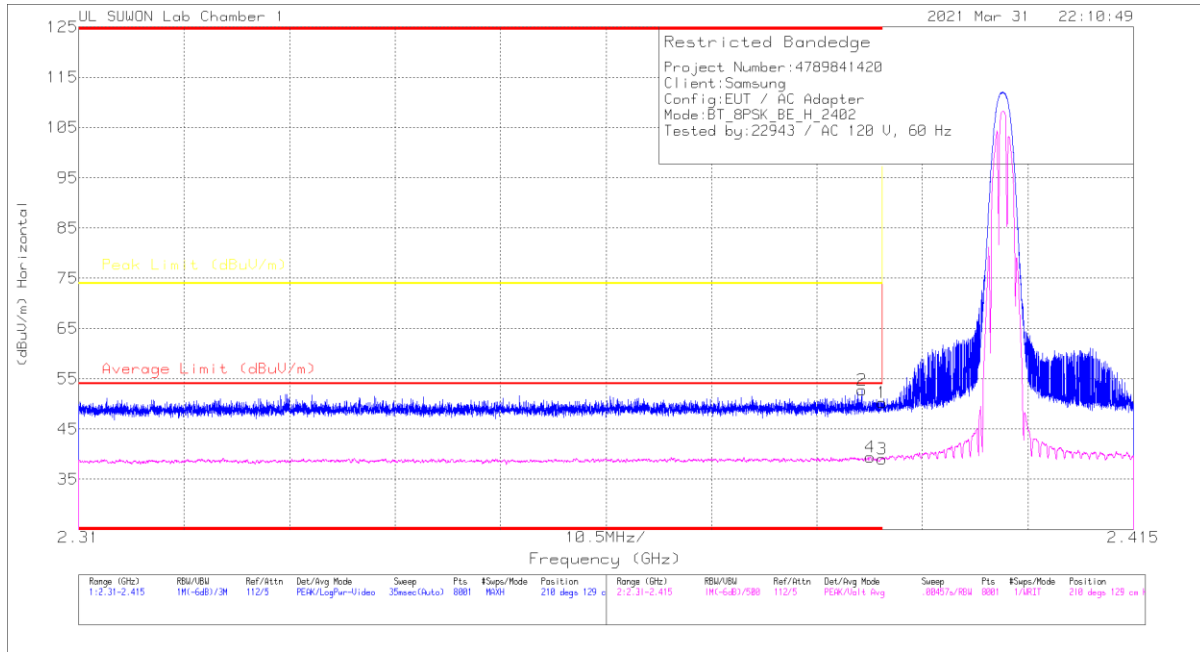

#### Trace Markers


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | 3117_00168717 | 10dB_ATT[dB] | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 44                   | Pk   | 31.8          | -25.6        | 50.2                       | -                      | -           | 74                  | -23.8          | 210            | 129         | H        |
| 2      | * 2.38796       | 46.43                | Pk   | 31.8          | -25.5        | 52.73                      | -                      | -           | 74                  | -21.27         | 210            | 129         | H        |
| 3      | * 2.39          | 32.86                | VA1T | 31.8          | -25.6        | 39.06                      | 54                     | -14.94      | -                   | -              | 210            | 129         | H        |
| 4      | * 2.3888        | 33.12                | VA1T | 31.8          | -25.5        | 39.42                      | 54                     | -14.58      | -                   | -              | 210            | 129         | H        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average  $V_B=1/T_{on}$  where:  $T_{on}$  is transmit duration

### VERTICAL RESULT

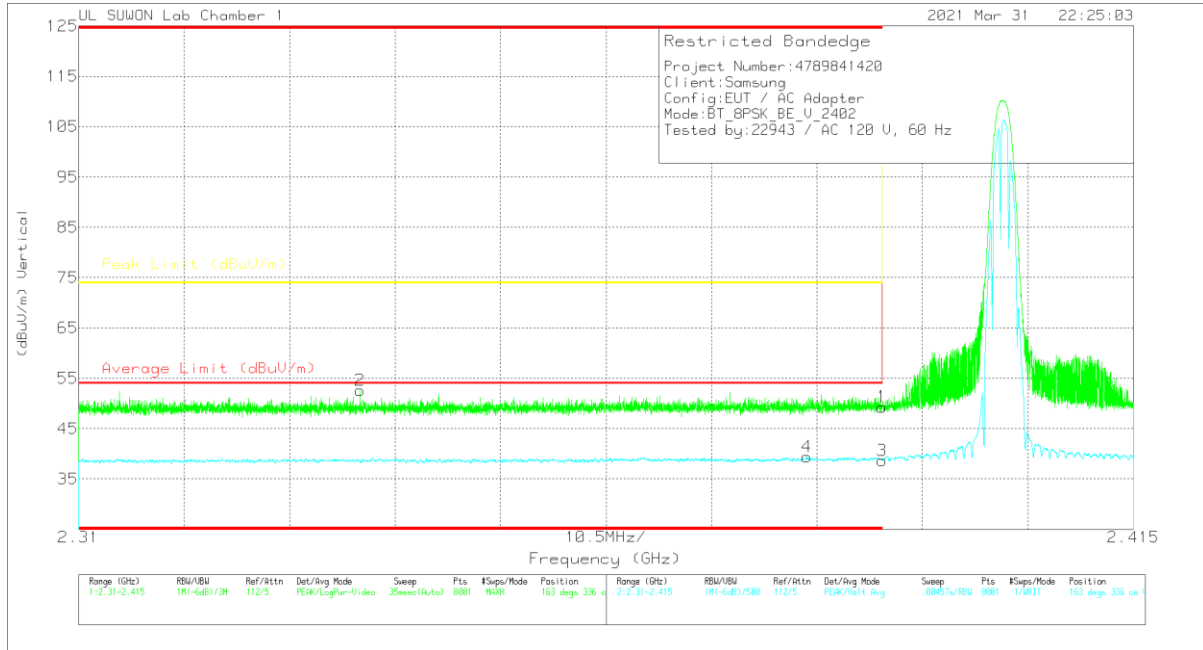


### Trace Markers

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | 3117_00168717 | 10dB_ATT[dB] | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 43.12                | Pk   | 31.8          | -25.6        | 49.32                      | -                      | -           | 74                  | -24.68         | 163            | 336         | V        |
| 2      | * 2.33801       | 46.49                | Pk   | 31.7          | -25.6        | 52.59                      | -                      | -           | 74                  | -21.41         | 163            | 336         | V        |
| 3      | * 2.39          | 32.51                | VA1T | 31.8          | -25.6        | 38.71                      | 54                     | -15.29      | -                   | -              | 163            | 336         | V        |
| 4      | * 2.38246       | 33.21                | VA1T | 31.8          | -25.6        | 39.41                      | 54                     | -14.59      | -                   | -              | 163            | 336         | V        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

**BANDEDGE (78 CHANNEL)**

**HORIZONTAL RESULT**

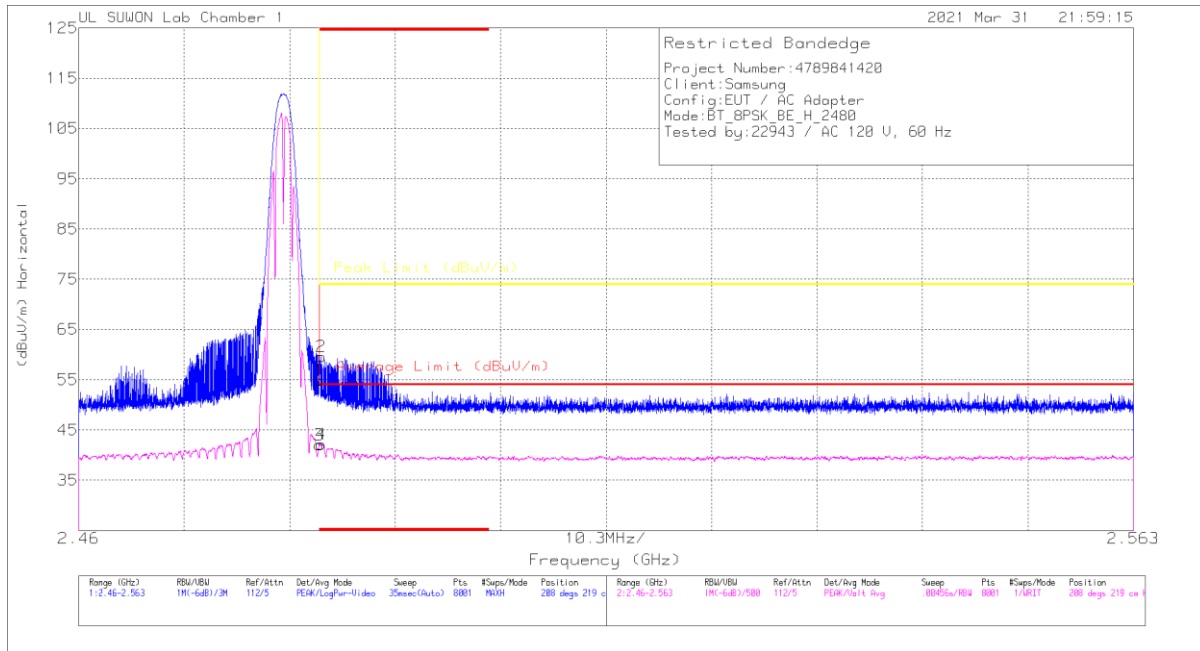

**Trace Markers**

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | 3117_00168717 | 10dB_ATT[dB] | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.48351       | 48.2                 | Pk   | 32            | -25.3        | 54.9                       | -                      | -           | 74                  | -19.1          | 208            | 219         | H        |
| 2      | * 2.48365       | 52.87                | PK   | 32            | -25.3        | 59.57                      | -                      | -           | 74                  | -14.43         | 208            | 219         | H        |
| 3      | * 2.48351       | 35.37                | VA1T | 32            | -25.3        | 42.07                      | 54                     | -11.93      | -                   | -              | 208            | 219         | H        |
| 4      | * 2.48368       | 35.47                | VA1T | 32            | -25.3        | 42.17                      | 54                     | -11.83      | -                   | -              | 208            | 219         | H        |

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration