



CERTIFICATION TEST REPORT

Report Number. : 4789867746-E2V2

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-T735

FCC ID : A3LSMT735

EUT Description : GSM/WCDMA/LTE Tablet + BT/BLE, DTS/UNII a/b/g/n/ac

Test Standard(s) : FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART F,H,L,M
FCC CFR47 PART 90 SUBPART S

Date Of Issue:

2021-04-30

Prepared by:

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



ACCREDITED

Testing Laboratory

TL-637

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2021-04-22	Initial issue	Hyunsik Yun
V2	2021-04-30	Updated to address TCB's question	Hyunsik Yun

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
1.1. INTRODUCTION OF TEST DATA REUSE	6
1.2. DIFFERENCE	6
1.3. SPOT CHECK VERIFICATION DATA.....	6
1.4. REFERENCE DETAIL.....	7
2. TEST METHODOLOGY	8
3. FACILITIES AND ACCREDITATION	8
4. CALIBRATION AND UNCERTAINTY	9
4.1. MEASURING INSTRUMENT CALIBRATION.....	9
4.2. SAMPLE CALCULATION.....	9
4.3. MEASUREMENT UNCERTAINTY	9
4.4. DECISION RULE	9
5. EQUIPMENT UNDER TEST	10
5.1. DESCRIPTION OF EUT.....	10
5.2. MAXIMUM OUTPUT POWER.....	10
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	16
5.4. WORST-CASE ORIENTATION.....	17
5.5. DESCRIPTION OF TEST SETUP.....	19
6. TEST AND MEASUREMENT EQUIPMENT	21
7. SUMMARY TABLE.....	22
8. PEAK TO AVERAGE RATIO	23
8.1. CONDUCTED PEAK TO AVERAGE RESULT.....	24
9. LIMITS AND CONDUCTED RESULTS	39
9.1. OCCUPIED BANDWIDTH.....	39
9.1.1. OCCUPIED BANDWIDTH RESULTS	43
9.2. BAND EDGE EMISSIONS	58
9.2.1. BAND EDGE RESULT.....	61
9.2.2. EMISSION MASK RESULT	90
9.3. OUT OF BAND EMISSIONS.....	116
9.3.1. OUT OF BAND EMISSIONS RESULT.....	118
9.4. FREQUENCY STABILITY.....	131
9.4.1. FREQUENCY STABILITY RESULTS	132
9.5. RADIATED POWER (ERP & EIRP)	139
9.5.1. ERP/EIRP Results	141
9.5.2. ERP/EIRP DATA	148

9.6. FIELD STRENGTH OF SPURIOUS RADIATION.....	185
9.6.1. SPURIOUS RADIATION PLOTS.....	187

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Tablet + BT/BLE, DTS/UNII a/b/g/n/ac
MODEL NUMBER: SM-T735
SERIAL NUMBER: R32R2008TKD, R32R2008VFL (Conducted, Original);
R32R2008V6A, R32R2008R7F (Radiated, Original);
R32R200DYSJ, R32R200DY3Y, R32R200DCVT
(Radiated, Spot-check);
DATE TESTED: 2021-02-25 – 2021-04-14(Original);
2021-03-25 – 2021-04-22(Spot-check);

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E, 27 F,H,L,M 90S	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Hyunsik Yun
Suwon Lab Engineer
UL Korea, Ltd.

1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMT736B WWAN(FCC CFR 47 Part 22/24/27/90). And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

1.2. DIFFERENCE

The FCC ID: A3LSMT735 shares the same enclosure and circuit board as FCC ID: A3LSMT736B. The WWAN antennas and surrounding circuitry and layout are identical between these two units for re-used bands.

In SM-T735 model, 5G NR parts are removed from the PCB.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMT736B remains representative of FCC ID: A3LSMT735. The test data of FCC ID: A3LSMT736B being submitted for this application to cover WWAN features.

1.3. SPOT CHECK VERIFICATION DATA

Band	Test Item	Worst Mode	Frequency	Test Limit	Original model		Spot check model		Deviation	Remark
					SM-T736B		SM-T735			
					FCC ID : A3LSMT736B		FCC ID : A3LSMT735			
GSM 850	ERP	GPRS	824.2 MHz	38.50 dBm	32.32 dBm	31.00 dBm	-1.32 dB			
	RSE	GPRS	836.6_3rd	-13.00 dBm	-39.30 dBm	-38.60 dBm	0.70 dB			
GSM 1900	EIRP	GPRS	1880.0 MHz	33.00 dBm	31.70 dBm	31.10 dBm	-0.60 dB			
	RSE	GPRS	1880_3rd	-13.00 dBm	-24.90 dBm	-35.60 dBm	-10.70 dB			
WCDMA Band 2	EIRP	Rel99	1907.6 MHz	33.00 dBm	23.51 dBm	23.43 dBm	-0.08 dB			
	RSE	Rel99	1907.6_4th	-13.00 dBm	-47.70 dBm	-49.30 dBm	-1.60 dB			
WCDMA Band 4	EIRP	Rel99	1752.6 MHz	30.00 dBm	23.63 dBm	23.21 dBm	-0.42 dB			
	RSE	Rel99	1752.6_4th	-13.00 dBm	-47.60 dBm	-49.90 dBm	-2.30 dB			
WCDMA Band 5	ERP	Rel99	846.6 MHz	38.50 dBm	22.57 dBm	23.07 dBm	0.50 dB			
	RSE	Rel99	846.6_4th	-13.00 dBm	-50.10 dBm	-53.40 dBm	-3.30 dB			
LTE Band 2	ERP	QPSK 20M	1880.0 MHz	33.00 dBm	24.59 dBm	23.12 dBm	-1.47 dB			
	RSE	QPSK 5M	1907.5_4th	-13.00 dBm	-47.80 dBm	-49.20 dBm	-1.40 dB			
LTE Band 5	ERP	QPSK 10M	844.0 MHz	38.50 dBm	23.86 dBm	22.87 dBm	-0.99 dB			
	RSE	QPSK 5M	846.5_4th	-13.00 dBm	-52.90 dBm	-53.30 dBm	-0.40 dB			
LTE Band 12	ERP	QPSK 5M	701.5 MHz	34.80 dBm	20.20 dBm	19.29 dBm	-0.91 dB			
	RSE	QPSK 5M	707.5_4th	-13.00 dBm	-52.30 dBm	-54.60 dBm	-2.30 dB			
LTE Band 13	ERP	QPSK 5M	779.5 MHz	34.80 dBm	22.08 dBm	21.17 dBm	-0.91 dB			
	RSE	QPSK 5M	779.5_2nd	-40.00 dBm	-64.00 dBm	-67.90 dBm	-3.90 dB			
LTE Band 25	ERP	QPSK 10M	1855.0 MHz	33.00 dBm	23.98 dBm	24.45 dBm	0.47 dB			
	RSE	QPSK 5M	1912.5_4th	-13.00 dBm	-47.20 dBm	-49.20 dBm	-2.00 dB			
LTE Band 26(Part22)	ERP	QPSK 15M	831.5 MHz	38.50 dBm	23.89 dBm	22.49 dBm	-1.40 dB			
	RSE	QPSK 1.4M	848.3_4th	-13.00 dBm	-50.80 dBm	-53.40 dBm	-2.60 dB			
LTE Band 26(Part90)	ERP	QPSK 1.4M	823.3 MHz	50.00 dBm	23.46 dBm	22.05 dBm	-1.41 dB			
	RSE	QPSK 1.4M	823.3_4th	-13.00 dBm	-51.20 dBm	-53.60 dBm	-2.40 dB			
LTE Band 41(PC3)	EIRP	QPSK 5M	2687.5 MHz	33.00 dBm	25.69 dBm	26.05 dBm	0.36 dB			
	RSE	QPSK 5M	2687.5_4th	-25.00 dBm	-50.60 dBm	-52.40 dBm	-1.80 dB			
LTE Band 66	EIRP	QPSK 5M	1745.0 MHz	30.00 dBm	24.71 dBm	23.29 dBm	-1.42 dB			
	RSE	QPSK 5M	1775_4th	-13.00 dBm	-47.70 dBm	-48.10 dBm	-0.40 dB			

Comparison of two models, upper deviation is within 3dB range and all test results are under FCC technical limits.

1.4. REFERENCE DETAIL

Reference application that contains the re-used reference data.

Equipment Class	Reference FCC ID	Application Type	Reference Test report	Reuse (EMC/RFX)	Report Title / Section
PCB	A3LSMT736B	Original Grant	4789841420-E2	EMC	FCC Report WWAN/ All sections
DTS	A3LSMT736B	Original Grant	4789841420-E3	EMC	Report DTS[b,g,n] WLAN/ All sections
			4789841420-E4	EMC	FCC Report BLE/ All sections
DSS	A3LSMT736B	Original Grant	4789841420-E5	EMC	FCC Report BT/ All sections
NII	A3LSMT736B	Original Grant	4789841420-E6	EMC	FCC Report UNII[a,n,ac] WLAN/ All sections

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 22.
3. FCC CFR 47 Part 24.
4. FCC CFR 47 Part 27.
5. FCC CFR 47 Part 90.
6. ANSI TIA-603-E, 2016
7. ANSI C63.26, 2015
8. KDB 971168 D01 Power Meas License Digital Systems v03r01
9. KDB 412172 D01 Determining ERP and EIRP v01r01
10. KDB 484596 D01 Referencing Test Data v01

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2
<input type="checkbox"/>	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$EIRP = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$

$ERP = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)}$

(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.01 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.26 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.90 dB
Radiated Disturbance, Above 18 GHz	5.49 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 1, Clause 4.4.2 in IEC Guide 115:2007.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Tablet + BT/BLE, DTS/UNII a/b/g/n/ac.
 This test report addresses the WWAN operational mode.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum average radiated ERP / EIRP output powers as follows:

Note : Conducted output power results were excerpted from RF exposure test report (4789841420-S1 FCC Report SAR).

GSM

FCC Part 22/24						
Band	Frequency Range [MHz]	Modulation	Conducted		Radiated	
			Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
GSM850	824.2~848.8	GPRS	33.08	2030.46	32.32	1706.08
		EGPRS	27.88	613.27	29.21	833.68
GSM1900	1850.2~1909.8	GPRS	30.49	1119.48	31.70	1479.11
		EGPRS	26.53	449.99	28.81	760.33

WCDMA

FCC Part 22/24/27						
Band	Frequency Range [MHz]	Modulation	Conducted		Radiated	
			Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 5	826.4~846.6	Rel. 99	24.49	280.93	22.57	180.72
		HSDPA	23.49	223.32	21.48	140.60
		HSUPA	23.47	222.50		
Band 4	1712.4~1752.6	Rel. 99	22.87	193.64	23.63	230.67
		HSDPA	21.73	148.89	22.67	184.93
		HSUPA	21.66	146.69		
Band 2	1852.4~1907.6	Rel. 99	22.75	188.36	23.51	224.39
		HSDPA	21.89	154.59	22.63	183.23
		HSUPA	21.85	153.17		

LTE Band 12

FCC Part 27							
Band	Frequency Range [MHz]	BandWidth [MHz]	Modulation	Conducted		Radiated	
				Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 12	699 ~ 716	10	QPSK	23.87	243.57	20.05	101.16
			16QAM	23.08	203.05	19.13	81.85
			64QAM	22.14	163.51		
		5	QPSK	23.91	246.01	20.20	104.71
			16QAM	23.10	204.36	19.47	88.51
			64QAM	22.25	167.83		
		3	QPSK	23.85	242.46	20.11	102.57
			16QAM	23.12	205.33	18.91	77.80
			64QAM	22.02	159.07		
		1.4	QPSK	23.79	239.50	19.98	99.54
			16QAM	23.06	202.21	19.12	81.66
			64QAM	22.17	164.73		

LTE Band 13

FCC Part 27							
Band	Frequency Range [MHz]	BandWidth [MHz]	Modulation	Conducted		Radiated	
				Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 13	777 ~ 787	10	QPSK	24.65	291.89	21.96	157.04
			16QAM	23.92	246.61	21.23	132.74
			64QAM	22.46	176.12		
		5	QPSK	24.73	297.10	22.08	161.44
			16QAM	23.88	244.43	21.08	128.23
			64QAM	22.98	198.51		

LTE Band 25

FCC Part 24							
Band	Frequency Range [MHz]	BandWidth [MHz]	Modulation	Conducted		Radiated	
				Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 25	1850 ~ 1915	20	QPSK	22.71	186.80	23.58	228.03
			16QAM	22.35	171.80	23.33	215.28
			64QAM	21.43	139.10		
		15	QPSK	22.76	188.76	23.74	236.59
			16QAM	22.14	163.72	22.71	186.64
			64QAM	21.11	129.22		
		10	QPSK	22.76	188.66	23.98	250.03
			16QAM	21.78	150.68	22.83	191.87
			64QAM	21.15	130.45		
		5	QPSK	22.86	193.03	23.72	235.50
			16QAM	22.06	160.55	22.95	197.24
			64QAM	20.86	121.88		
		3	QPSK	22.76	188.99	23.88	244.34
			16QAM	21.87	153.71	22.93	196.34
			64QAM	21.26	133.76		
		1.4	QPSK	22.82	191.44	23.75	237.14
			16QAM	22.25	167.83	22.53	179.06
			64QAM	21.29	134.51		

LTE Band 26 (Part 90)

FCC Part 90							
Band	Frequency Range [MHz]	BandWidth [MHz]	Modulation	Conducted		Radiated	
				Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 26	814 ~ 824	15	QPSK	24.95	312.51	22.63	183.23
			16QAM	24.14	259.23	21.72	148.59
			64QAM	23.22	210.08		
		10	QPSK	25.05	319.70	22.44	175.39
			16QAM	24.16	260.55	21.16	130.62
			64QAM	23.40	218.78		
		5	QPSK	25.03	318.63	23.36	216.77
			16QAM	24.15	259.79	22.57	180.72
			64QAM	23.23	210.52		
		3	QPSK	24.97	314.10	23.42	219.79
			16QAM	23.98	250.15	22.85	192.75
			64QAM	23.12	205.31		
		1.4	QPSK	25.10	323.50	23.46	221.82
			16QAM	24.31	269.93	22.22	166.72
			64QAM	23.42	219.75		

LTE Band 26 (Straddle)

Straddle							
Band	Frequency Range [MHz]	BandWidth [MHz]	Modulation	Conducted		Radiated	
				Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 26	824	15	QPSK	24.20	263.03	23.04	201.37
			16QAM	23.71	234.96	22.55	179.89
			64QAM	23.02	200.45		
		10	QPSK	24.40	275.42	23.44	220.80
			16QAM	24.11	257.63	22.94	196.79
			64QAM	23.00	199.53		
		5	QPSK	24.56	285.76	23.29	213.30
			16QAM	24.09	256.45	22.66	184.50
			64QAM	22.95	197.24		
		3	QPSK	24.54	284.45	23.59	228.56
			16QAM	24.19	262.42	22.49	177.42
			64QAM	22.96	197.70		
		1.4	QPSK	24.37	273.53	23.48	222.84
			16QAM	23.93	247.17	22.69	185.78
			64QAM	23.00	199.53		

LTE Band 26 (Part 22)

FCC Part 22							
Band	Frequency Range [MHz]	BandWidth [MHz]	Modulation	Conducted		Radiated	
				Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 26	824 ~ 849	15	QPSK	24.58	287.09	23.89	244.91
			16QAM	23.90	245.60	23.40	218.78
			64QAM	23.04	201.36		
		10	QPSK	24.65	291.93	23.53	225.42
			16QAM	24.14	259.50	22.59	181.55
			64QAM	23.22	209.72		
		5	QPSK	24.75	298.30	23.66	232.27
			16QAM	24.05	254.06	22.79	190.11
			64QAM	22.97	198.05		
		3	QPSK	24.71	295.82	23.79	239.33
			16QAM	23.90	245.29	23.17	207.49
			64QAM	22.95	197.15		
		1.4	QPSK	24.79	301.09	23.68	233.35
			16QAM	24.03	253.01	22.77	189.23
			64QAM	23.00	199.48		

LTE Band 41

FCC Part 27							
Band	Frequency Range [MHz]	BandWidth [MHz]	Modulation	Conducted		Radiated	
				Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 41	2496 ~ 2690	20	QPSK	23.90	245.28	24.99	315.50
			16QAM	22.97	197.96	25.29	338.06
			64QAM	21.95	156.80		
		15	QPSK	23.88	244.43	25.48	353.18
			16QAM	23.00	199.73	24.43	277.33
			64QAM	21.71	148.09		
		10	QPSK	23.94	247.90	25.47	352.37
			16QAM	22.86	193.29	25.50	354.81
			64QAM	21.71	148.09		
		5	QPSK	23.91	245.91	25.69	370.68
			16QAM	23.01	200.05	25.51	355.63
			64QAM	22.31	170.19		

LTE Band 66

FCC Part 27							
Band	Frequency Range [MHz]	BandWidth [MHz]	Modulation	Conducted		Radiated	
				Avg [dBm]	Avg [mW]	Avg [dBm]	Avg [mW]
Band 66	1710 ~ 1780	20	QPSK	23.09	203.82	23.97	249.46
			16QAM	22.50	177.96	23.00	199.53
			64QAM	21.48	140.72		
		15	QPSK	23.11	204.83	24.07	255.27
			16QAM	22.52	178.67	23.05	201.84
			64QAM	21.50	141.31		
		10	QPSK	23.25	211.13	24.02	252.35
			16QAM	22.26	168.44	23.33	215.28
			64QAM	21.64	145.87		
		5	QPSK	23.34	215.65	24.71	295.80
			16QAM	22.50	177.68	22.87	193.64
			64QAM	21.34	136.25		
		3	QPSK	23.17	207.45	24.29	268.53
			16QAM	22.29	169.50	23.45	221.31
			64QAM	21.68	147.15		
		1.4	QPSK	23.21	209.36	24.34	271.64
			16QAM	22.55	179.77	23.41	219.28
			64QAM	21.60	144.54		

LTE Band 2

LTE Band 2(Frequency range: 1850-1910 MHz) is covered by LTE Band 25 (Frequency range: 1850-1915 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 4

LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 5

LTE Band 5 (Frequency range: 824-849 MHz) is covered by LTE Band 26 (Frequency range: 814-849 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 17

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a internal antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
LTE Band 26 (Part 90) 814 ~ 824 MHz	-3.12
GSM850 / WCDMA Band 5 / LTE Band 5 / LTE Band 26 (Part 22) 824 ~ 849 MHz	-3.48
WCDMA Band 4 / LTE Band 4 / LTE Band 66 1710 ~ 1780 MHz	-1.87
GSM 1900 / WCDMA Band 2 / LTE Band 2 / LTE Band 25 1850 ~ 1915 MHz	-1.29
LTE Band 12 / LTE Band 17 699 ~ 716 MHz	-3.71
LTE Band 13 777 ~ 787 MHz	-2.53
LTE Band 41 2496 ~ 2690 MHz	-1.58

5.4. WORST-CASE ORIENTATION

Following modes should be considered as worst-case scenario for all other measurements.

- GSM GPRS/EGPRS
- UMTS REL 99/HSDPA

For all LTE Bands, the worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on QPSK, 16QAM, and 64QAM modulations. It was found that QPSK and 16QAM results were worst case. All testing was performed using QPSK and 16QAM modulations to represent the worst case. However, the out of band emissions and spurious radiation were only performed on bandwidth and RB offset(with RB size 1) with the highest conducted power in QPSK.

Highest power setting for each bands				
LTE Band	Frequency (MHz)	Bandwidth (MHz)	RB size	RB offset
12	701.5	5	1	0
	707.5		1	0
	713.5		1	0
13	779.5	5	1	24
	782.0		1	24
	784.5		1	24
25	1852.5	5	1	24
	1882.5		1	24
	1912.5		1	24
26(Part 90)	814.7	1.4	1	3
	823.3		1	3
26(Straddle)	824.0	5	1	24
26(Part 22)	824.7	1.4	1	3
	831.5		1	3
	848.3		1	3
41	2498.5	5	1	0
	2593.0		1	24
	2687.5		1	24
66	1712.5	5	1	24
	1745.0		1	12
	1777.5		1	0

i. Worst Axis Condition


The fundamental and radiated spurious emission were investigated in three orthogonal orientations X, Y and Z, it was determined that below orientation was worst-case orientation for each band.

Band	ERP/EIRP				RSE			
	X	Y	Z	Laptop	X	Y	Z	Laptop
GSM850	-	Stand Alone	-	-	-	-	-	O
GSM1900	-	-	Stand Alone	-	Full Covered	-	-	-
WCDMA B5	-	Stand Alone	-	-	Stand Alone	-	-	-
WCDMA B4	Stand Alone	-	-	-	Stand Alone	-	-	-
WCDMA B2	Stand Alone	-	-	-	Stand Alone	-	-	-
LTE B12	-	Stand Alone	-	-	-	Stand Alone	-	-
LTE B13	-	Stand Alone	-	-	Full Covered	-	-	-
LTE B25	-	-	Stand Alone	-	Stand Alone	-	-	-
LTE B26	-	Stand Alone	-	-	-	Stand Alone	-	-
LTE B41	Stand Alone	-	-	-	Stand Alone	-	-	-
LTE B66	Full Covered	-	-	-	Full Covered	-	-	-

Note : For ERP/EIRP testing, the EUT didn't attached with travel adapter. But radiated spurious testing, the EUT attached with travel adapter for the worst case condition. The EUT is continuously communicated with the call box during the tests.

ii. Foldable Condition

The Fundamental of the EUT was investigated four foldable conditions(Stand Alone, , Open, Full-Coverd, Laptop).

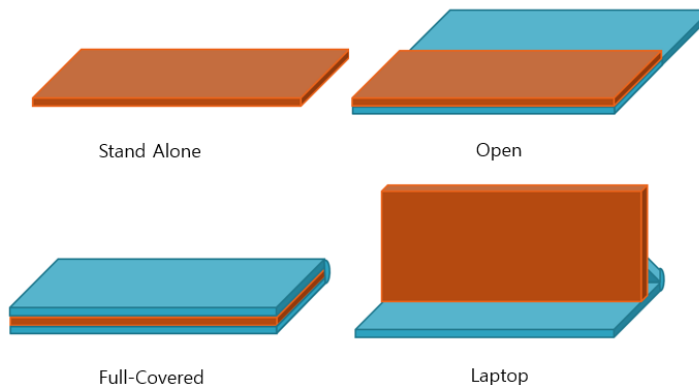

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA200	R37R1XS0P35DK3	N/A
Data Cable	SAMSUNG	EP-DT725BBE	N/A	N/A


I/O CABLE

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A


TEST SETUP

The EUT is continuously communicated with the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

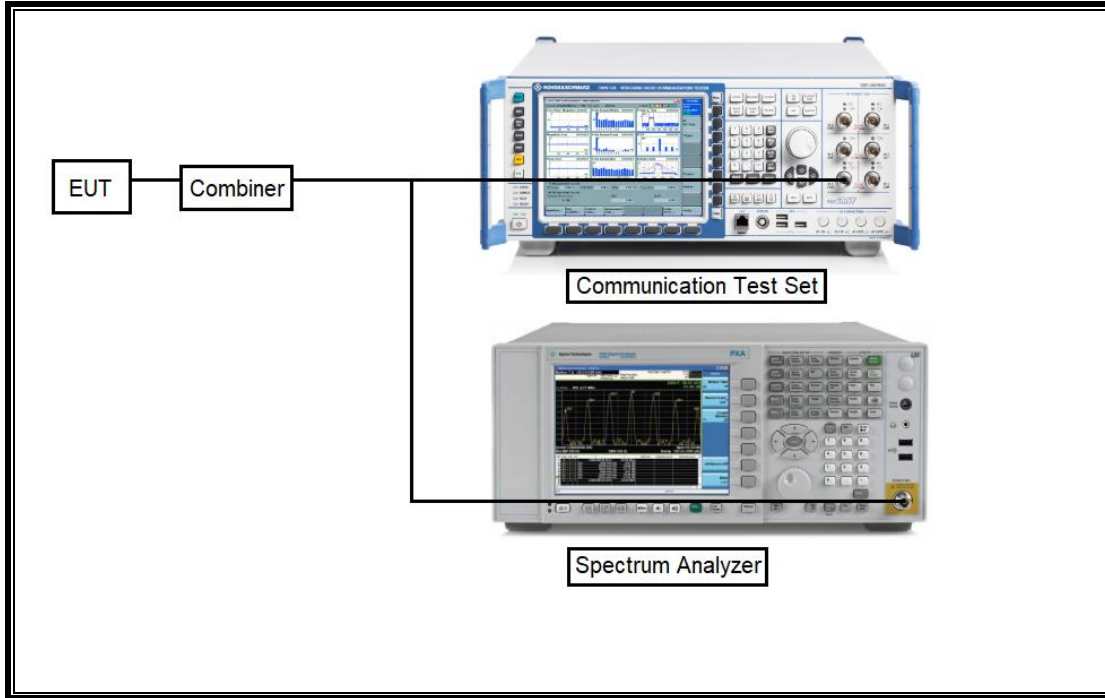

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

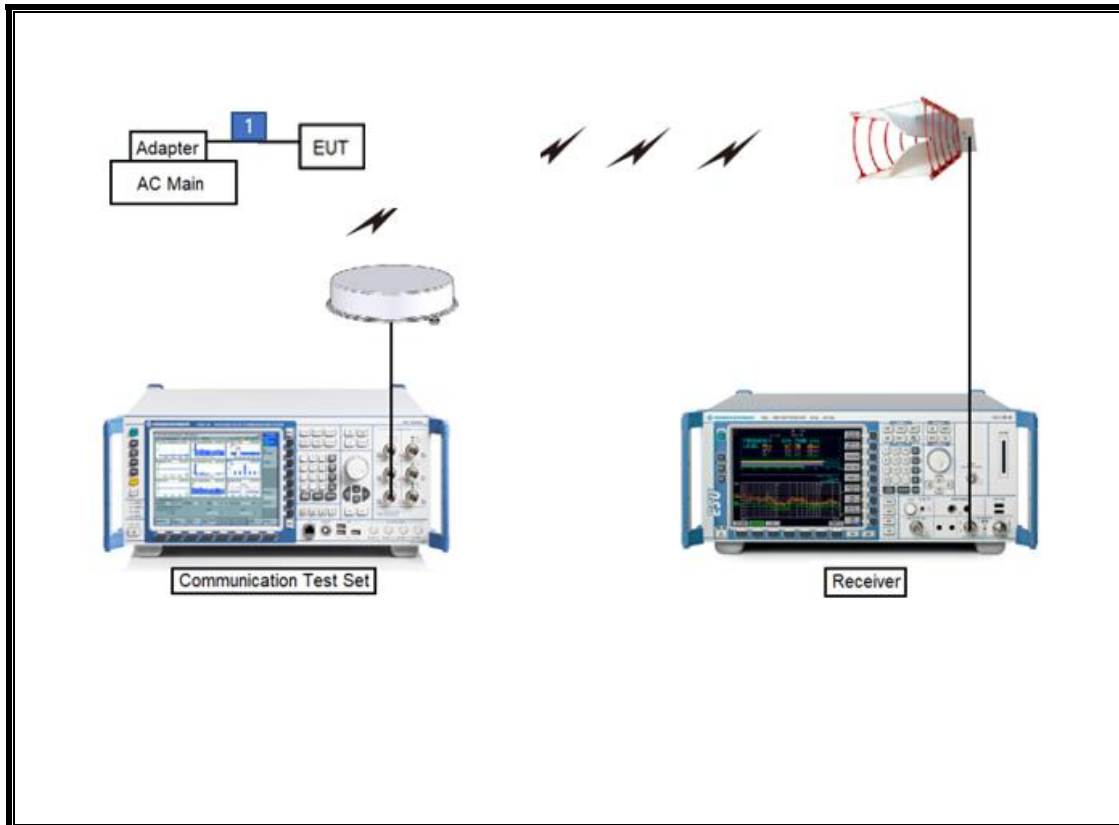

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Tuned Dipole 400~1000 MHz	ETS	3121D DB4	00164753	2023-02-08
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	110367-0003	N/A
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	80108-0004	N/A
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2022-08-04
Antenna, Horn, 40 GHz	ETS	3116C	00168645	2021-10-02
Preamplifier	ETS	3116C-PA	00168841	2021-08-06
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	2022-08-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	2022-08-13
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	2022-08-13
Antenna, Horn, 18 GHz	ETS	3115	00167211	2022-07-27
Antenna, Horn, 18 GHz	ETS	3115	00161451	2022-08-15
Antenna, Horn, 18 GHz	ETS	3117	00168724	2022-07-27
Antenna, Horn, 18 GHz	ETS	3117	00168717	2022-08-15
Communications Test Set	R&S	CMW500	150314	2021-08-04
DC Power Supply	Agilent / HP	E3640A	MY54226395	2021-08-05
Preamplifier, 1000 MHz	Sonoma	310N	341282	2021-08-03
Preamplifier, 1000 MHz	Sonoma	310N	370599	2021-08-06
Preamplifier, 1000 MHz	Sonoma	310N	351741	2021-08-03
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	2021-08-03
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	2021-08-04
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	2021-08-03
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	2021-08-05
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	2021-08-05
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2021-08-03
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2021-08-03
High Pass Filter 1.2GHz	Micro-Tronics	HPM50108-02	G005	2021-08-05
High Pass Filter 1.2GHz	Micro-Tronics	HPM50108-02	G006	2021-08-05
High Pass Filter 2.8GHz	Micro-Tronics	HPM50111-02	010	2021-08-05
High Pass Filter 2.8GHz	Micro-Tronics	HPM50111-02	011	2021-08-05
High Pass Filter 4GHz	Micro-Tronics	HPM50118-02	G001	2021-08-05
High Pass Filter 4GHz	Micro-Tronics	HPM50118-02	G002	2021-08-05
Attenuator	PASTERNAK	PE7087-10	A009	2021-08-05
Attenuator	PASTERNAK	PE7087-10	A001	2021-08-03
Attenuator	PASTERNAK	PE7087-10	A008	2021-08-03
Attenuator	PASTERNAK	PE7004-10	2	2021-08-04
Attenuator	PASTERNAK	PE7395-10	A011	2021-08-05
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2021-10-02
Temperature Chamber	ESPEC	SH-642	93001109	2021-08-04
Power Splitter	MINI-CIRCUITS	WA1534	UL001	2022-01-27
Power Splitter	MINI-CIRCUITS	WA1534	UL002	2022-01-27
UL Software				
Description	Manufacturer	Model	Version	
Antenna port test software	UL	CLT	Ver 2.5	
Radiated software	UL	UL EMC	Ver 9.5	
Antenna port test software (5G NR FR1)	UL	UL iM	Ver 1.04	

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
2.1049	Occupied Band width (99%)	N/A	Conducted	Pass
22.917(a) 24.238(a) 27.53(c),(g),(h) 90.691	Band Edge / Conducted Spurious Emission	-13dBm		Pass
27.53(m)	Conducted Spurious Emission	-25 dBm		Pass
27.53(a),(m) 90.691	Emission mask	Section 9.2.2		Pass
2.1046	Conducted output power	N/A		Pass
22.355 24.235 90.213	Frequency Stability	2.5PPM		Pass
22.913(a)(5)	Effective Radiated Power	38.5 dBm		Pass
90.635(b)		50 dBm	Pass	
27.50(b)(10) 27.50(c)(10)		34.77 dBm	Pass	
24.232(c) 27.50(h)(2)	Equivalent Isotropic Radiated Power	33dBm	Pass	
27.50(d)(4)		30dBm	Pass	
22.917(a) 24.238(a) 27.53(c),(g),(h) 90.691	Radiated Spurious Emission	-13dBm	Pass	
27.53 (m)		-25dBm	Pass	

8. PEAK TO AVERAGE RATIO

Test Procedure

Per KDB 971168 D01 Power Meas License Digital Systems v03r01;

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The PAR were measured on the Spectrum Analyzer.


Test Spec

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.


RESULTS

8.1. CONDUCTED PEAK TO AVERAGE RESULT

GSM

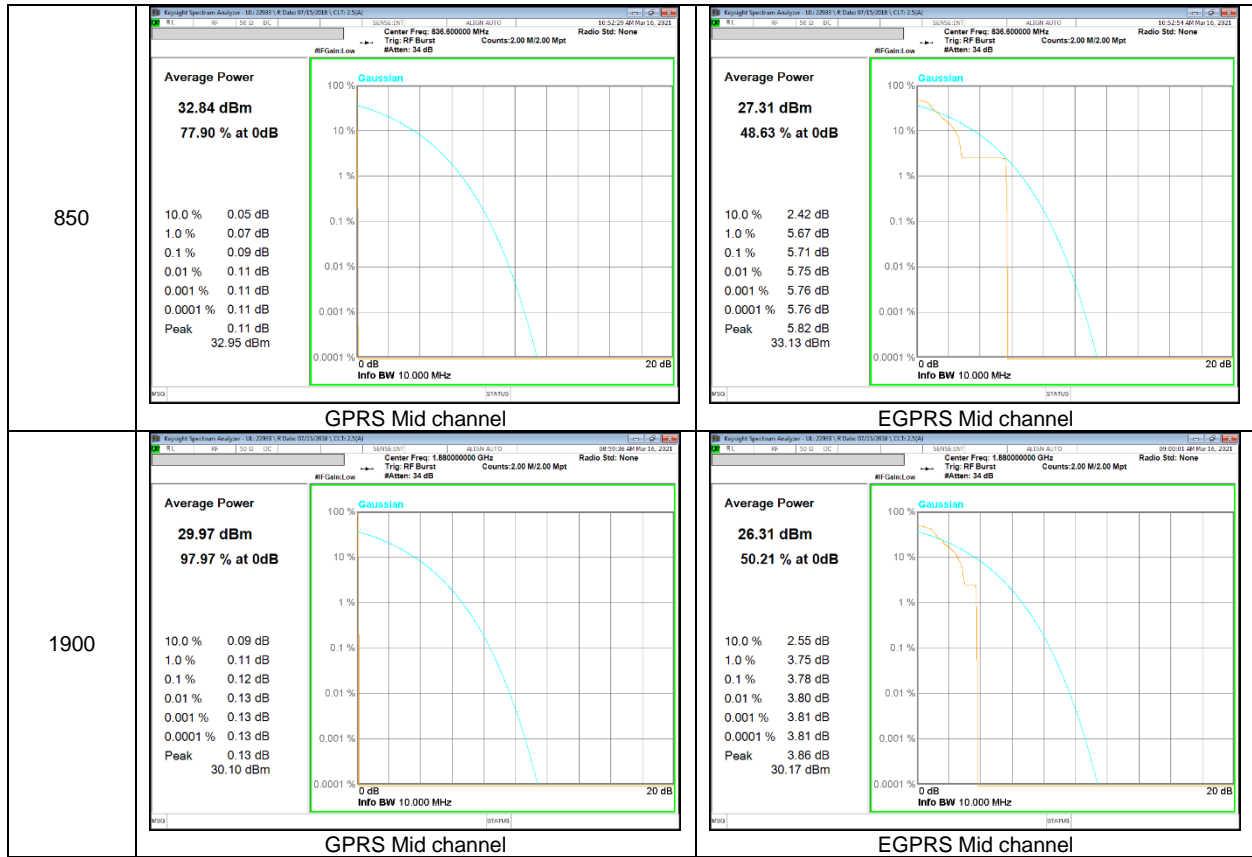


WCDMA

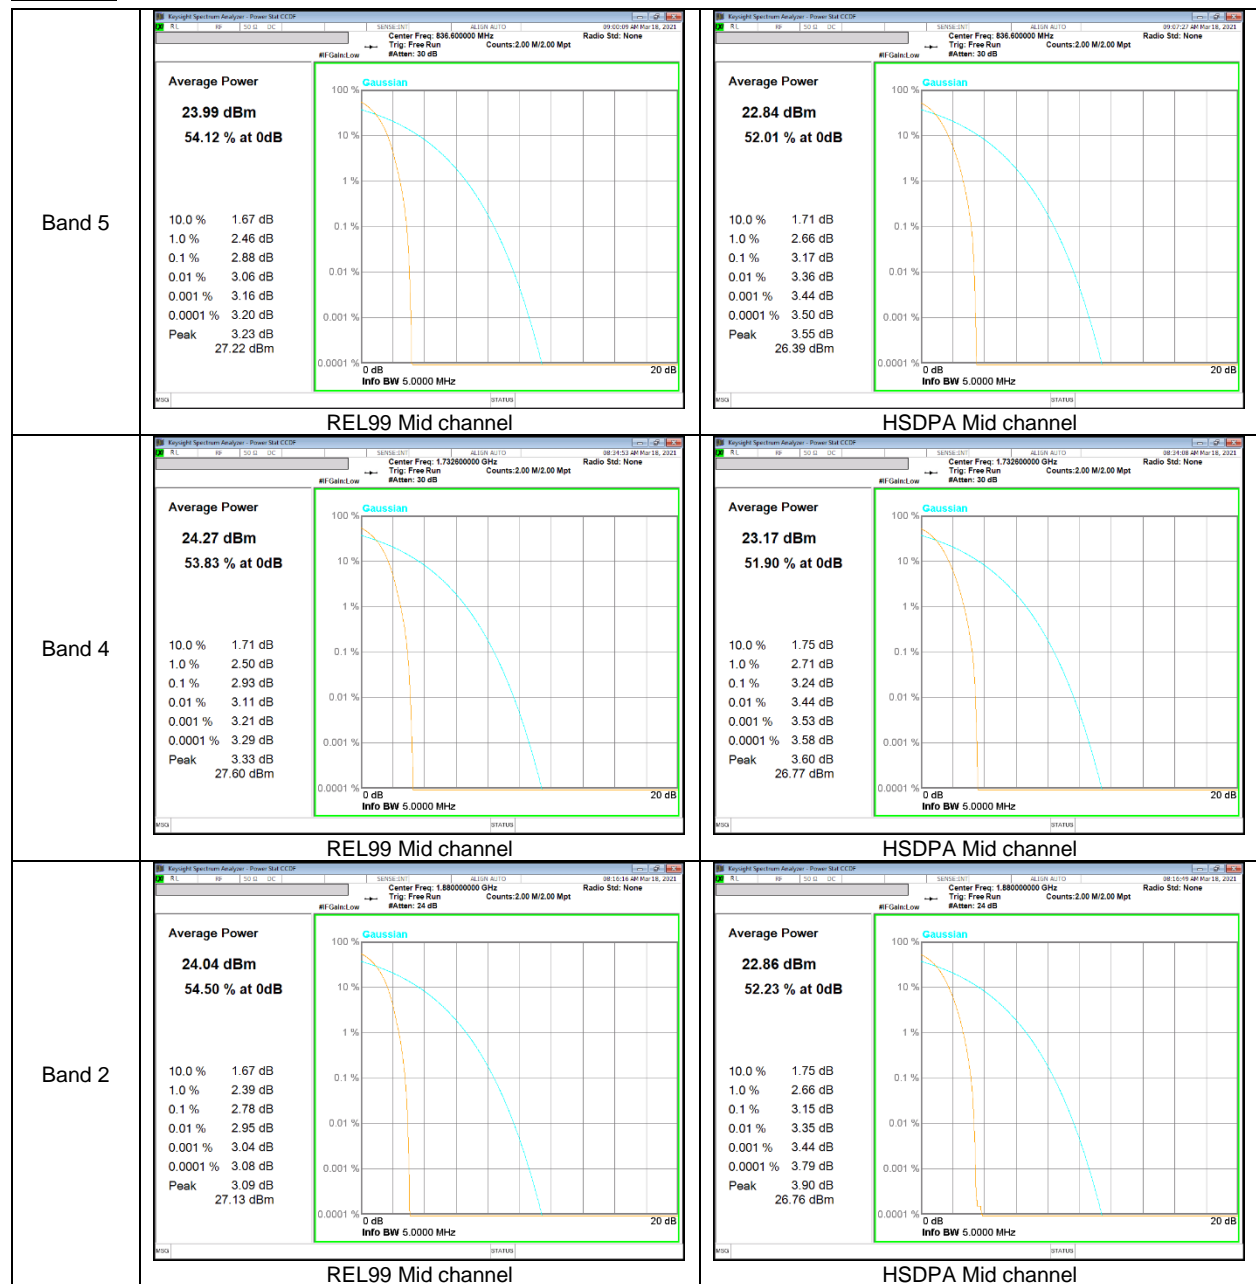


LTE Band 12




LTE Band 13

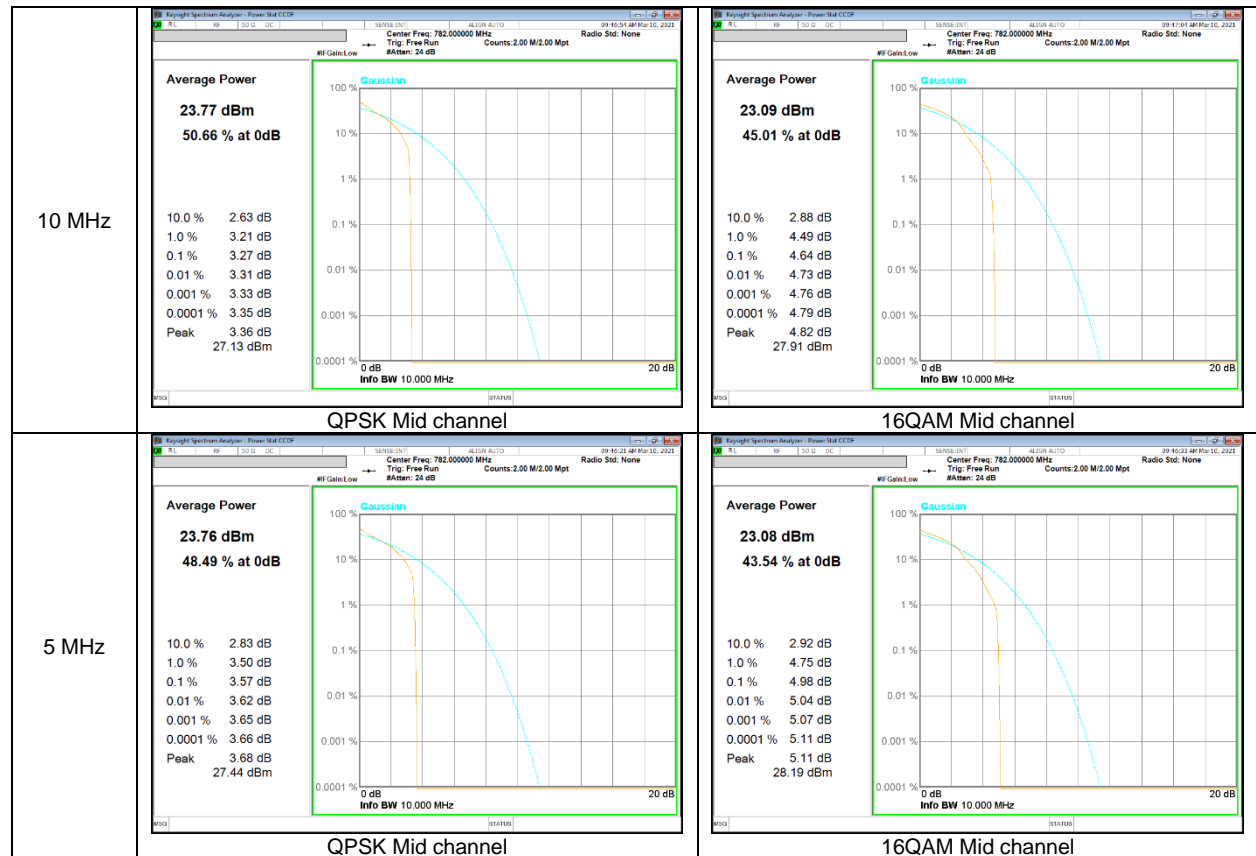



LTE Band 25

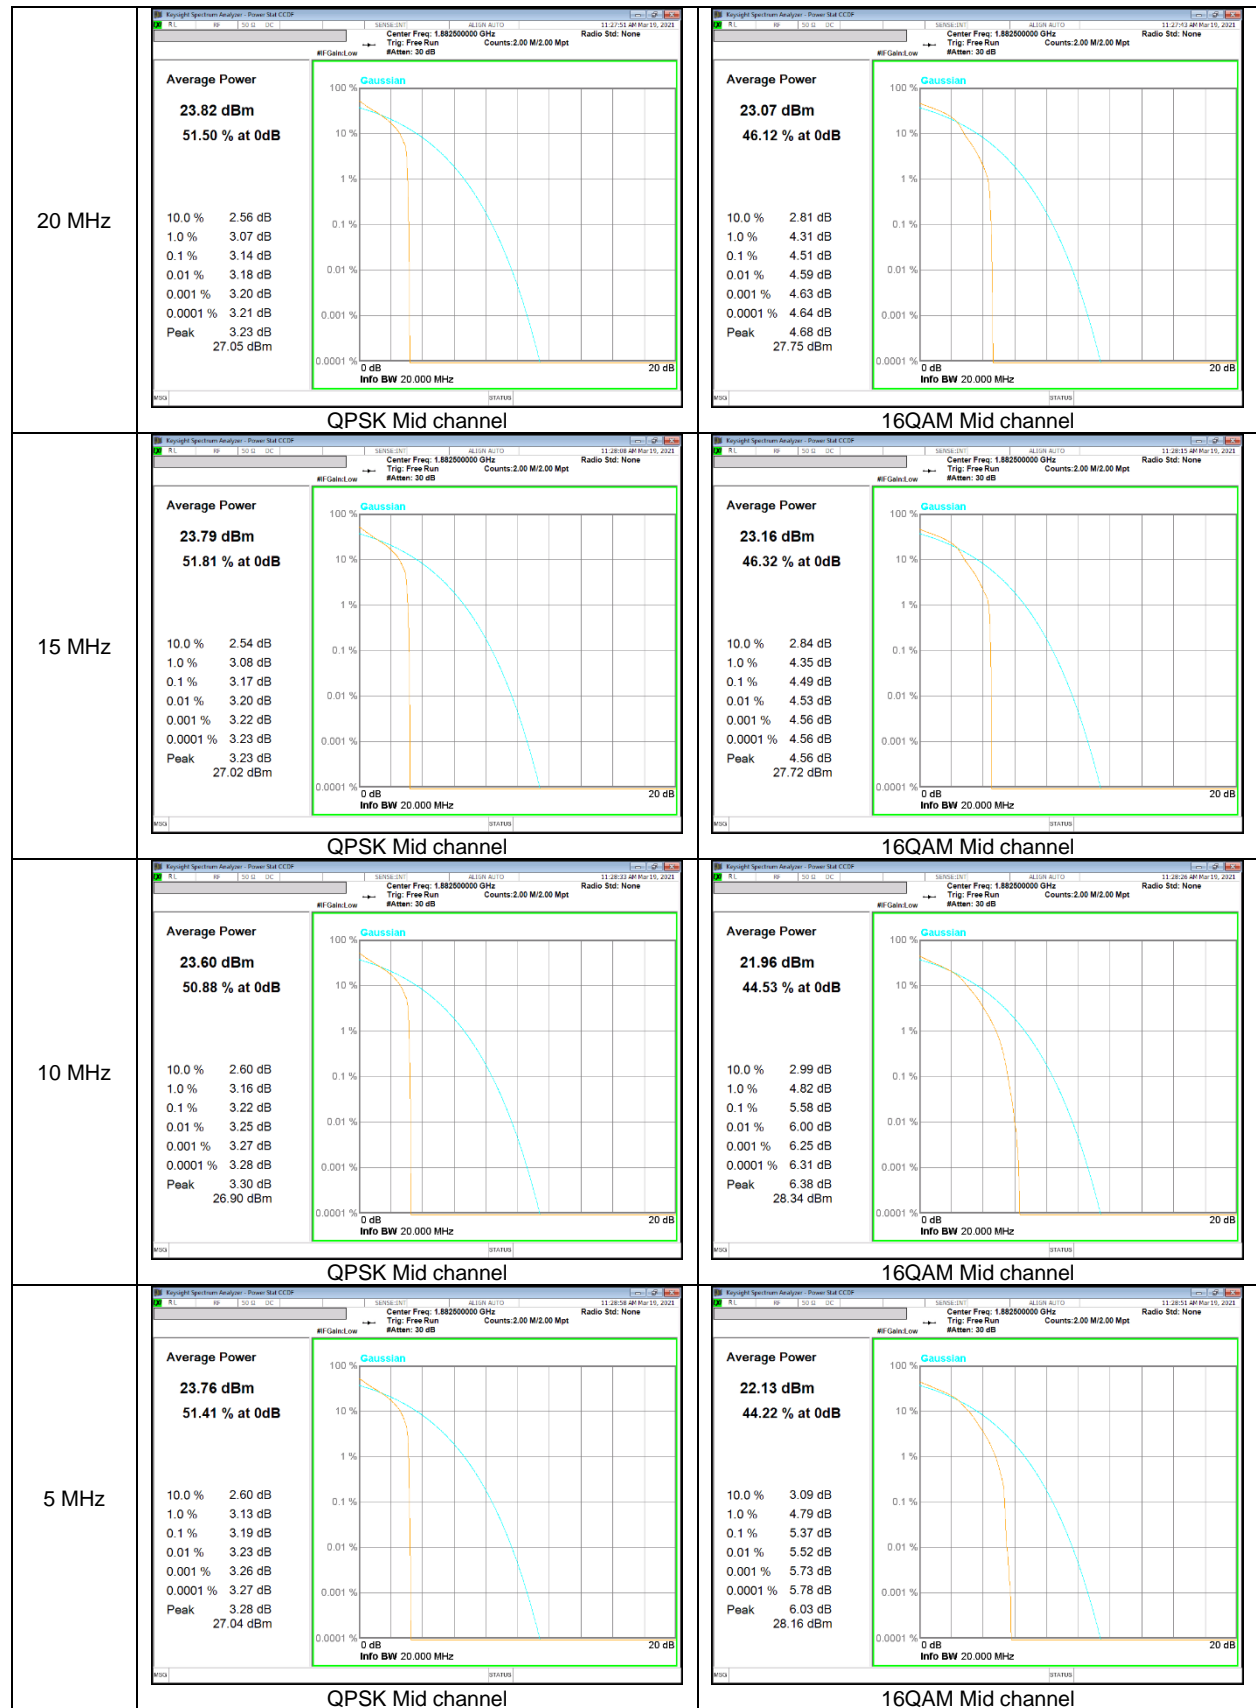

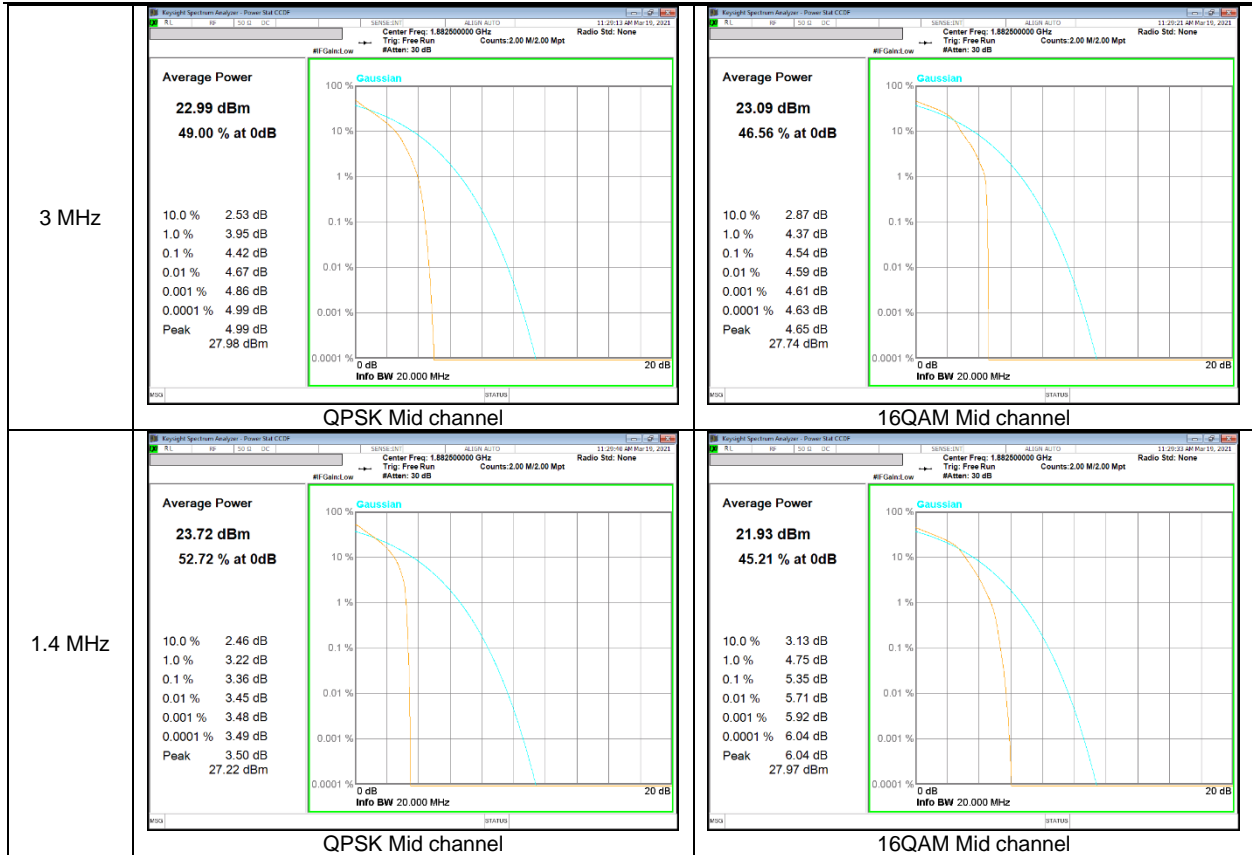



LTE Band 26 (Part 90)

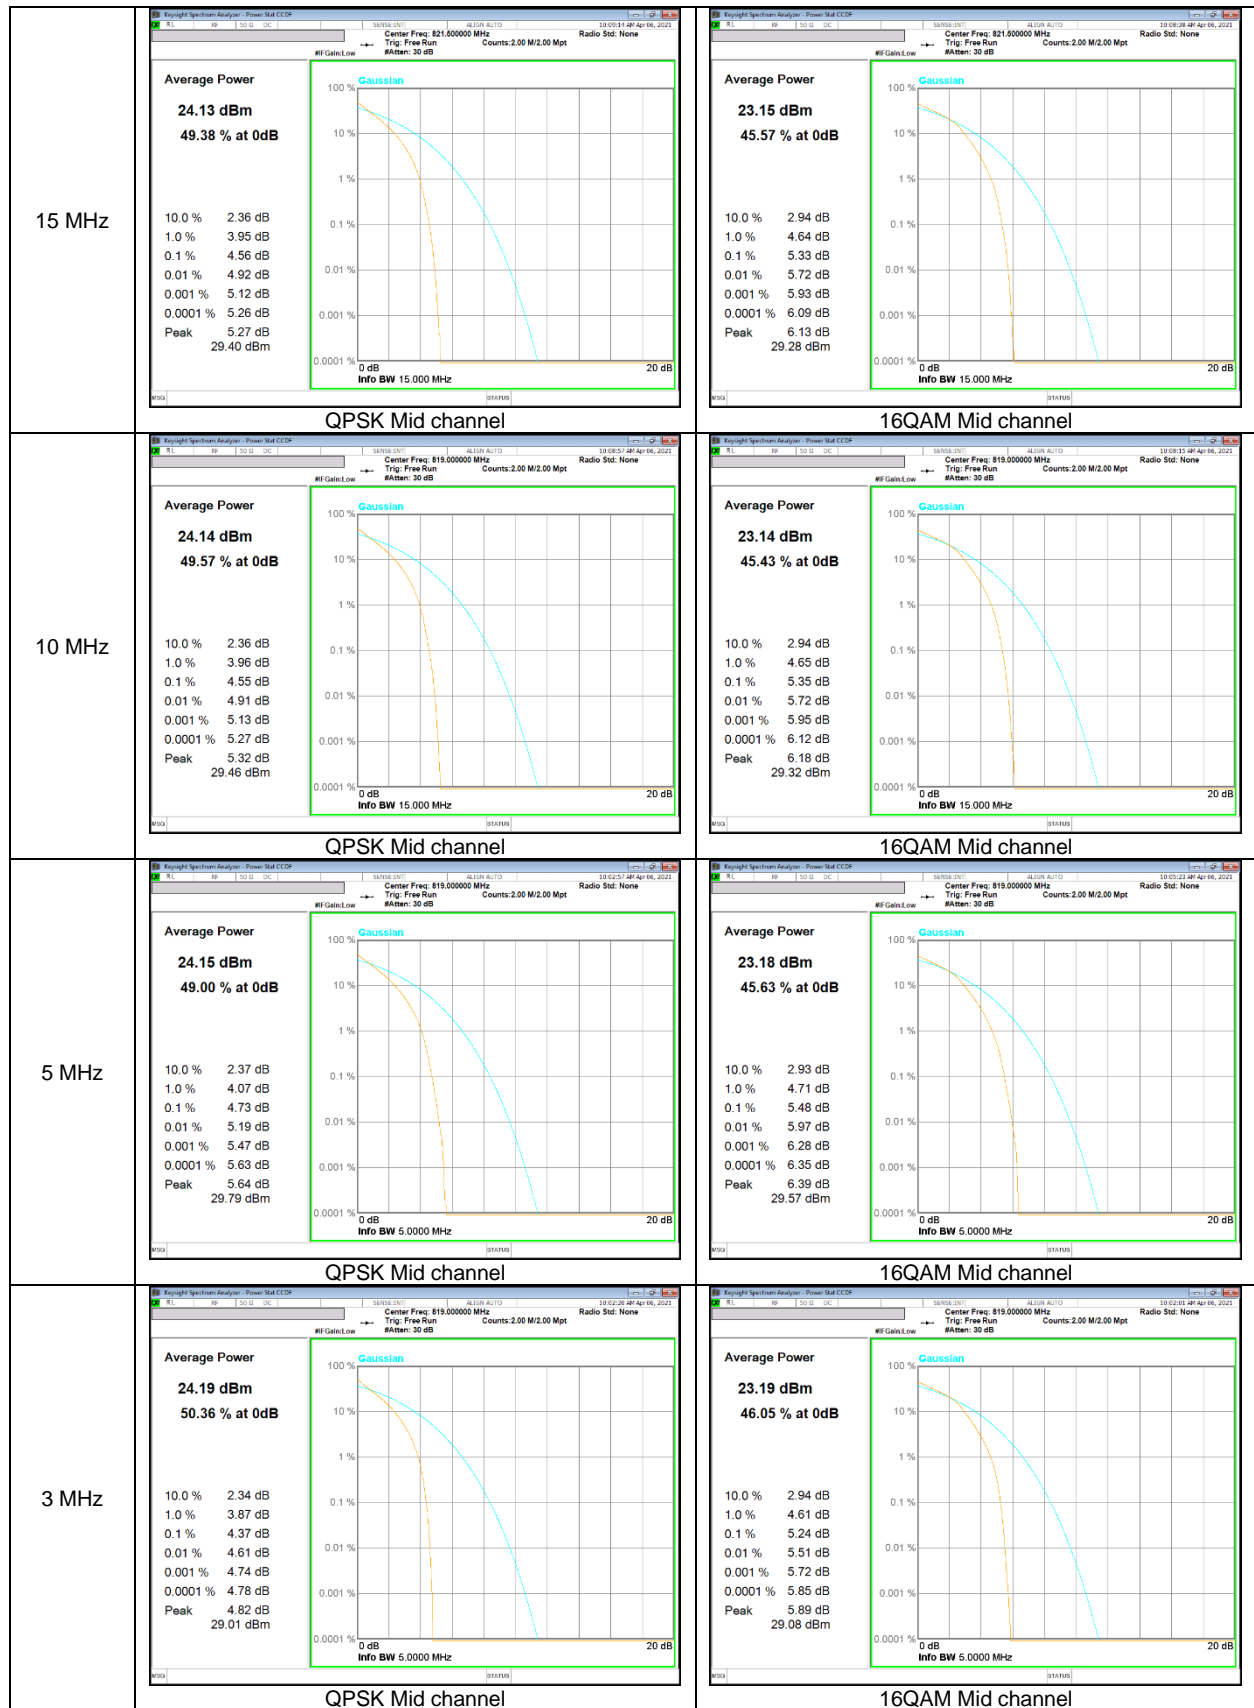

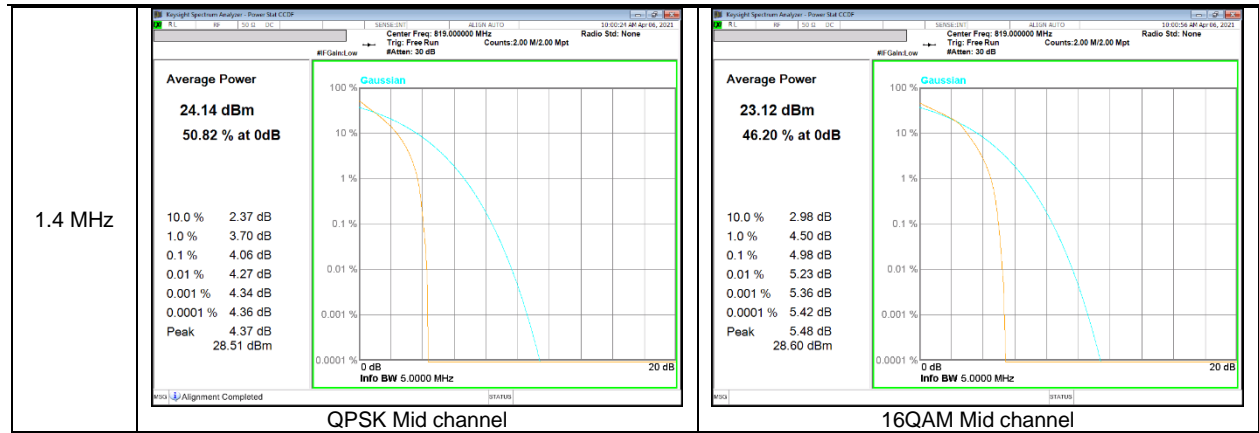



LTE Band 26 (Straddle)

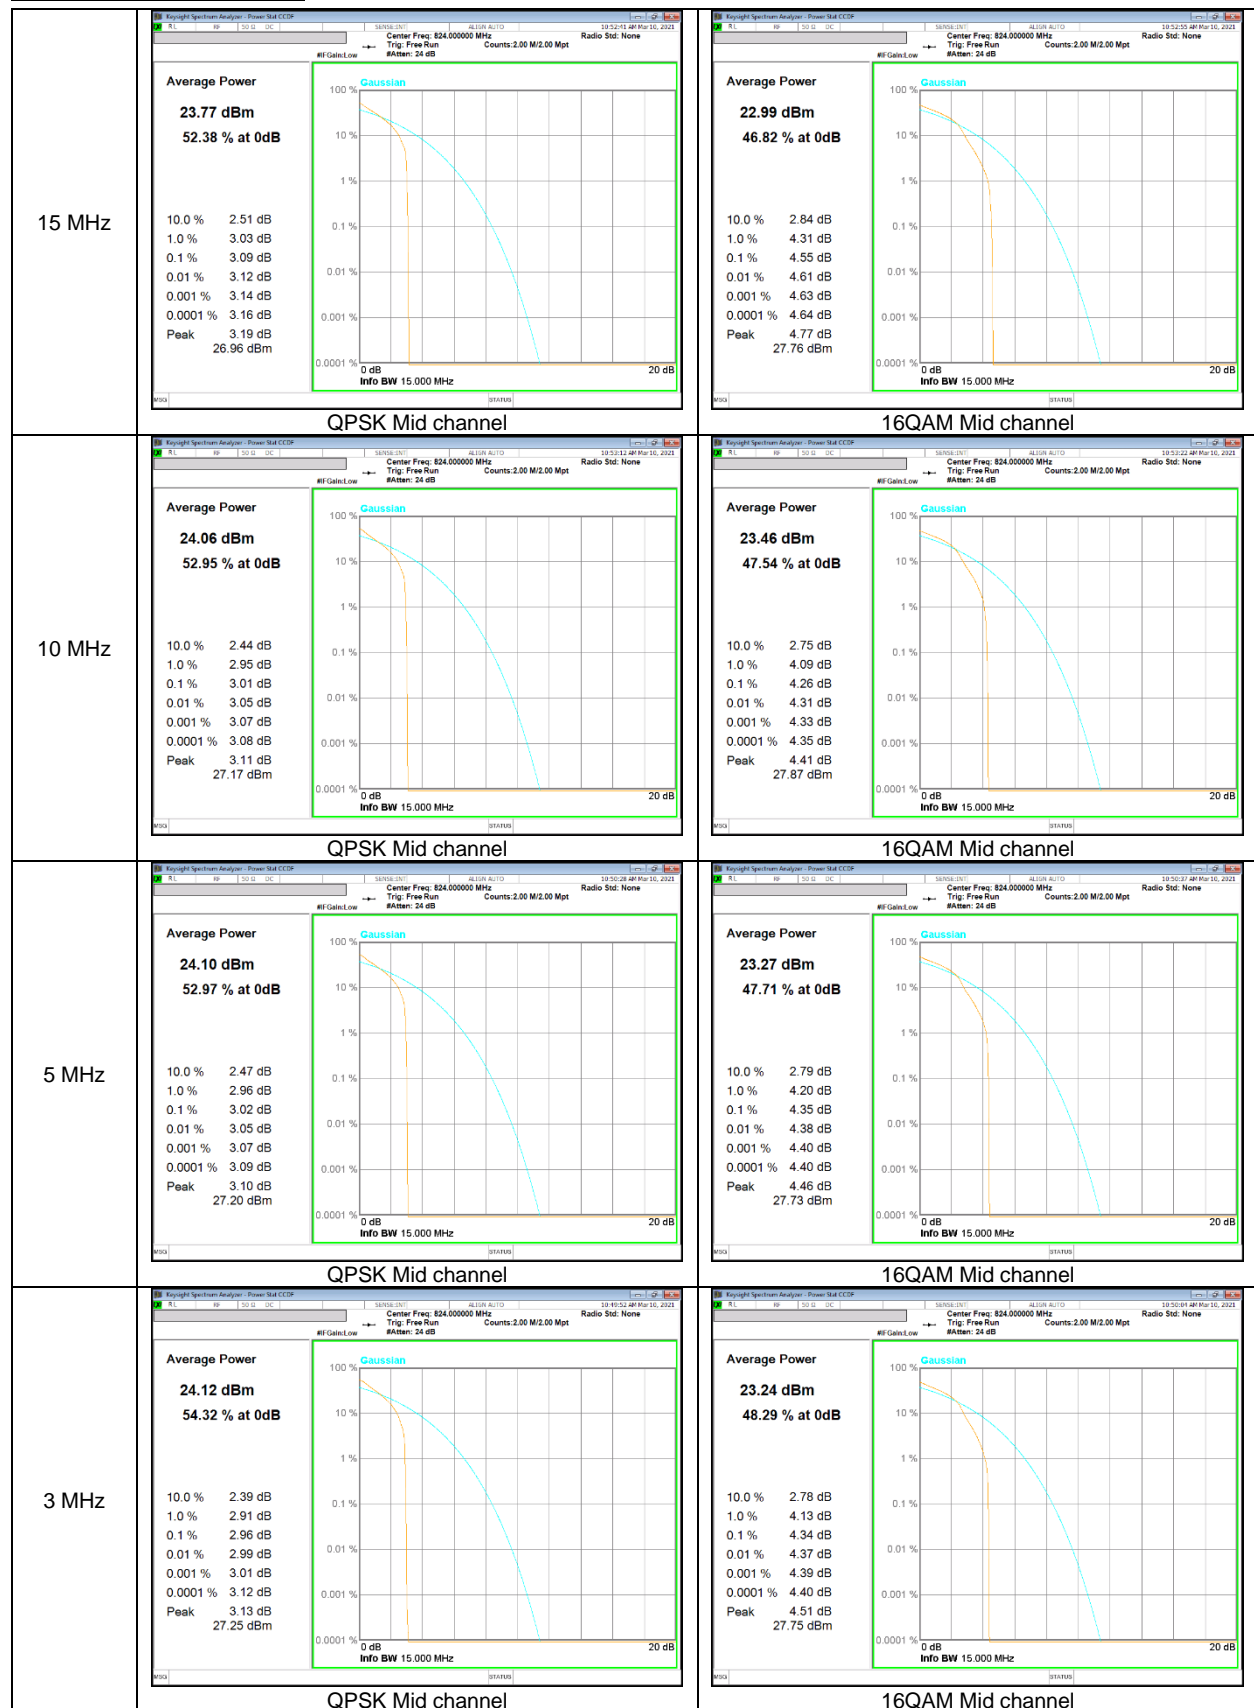

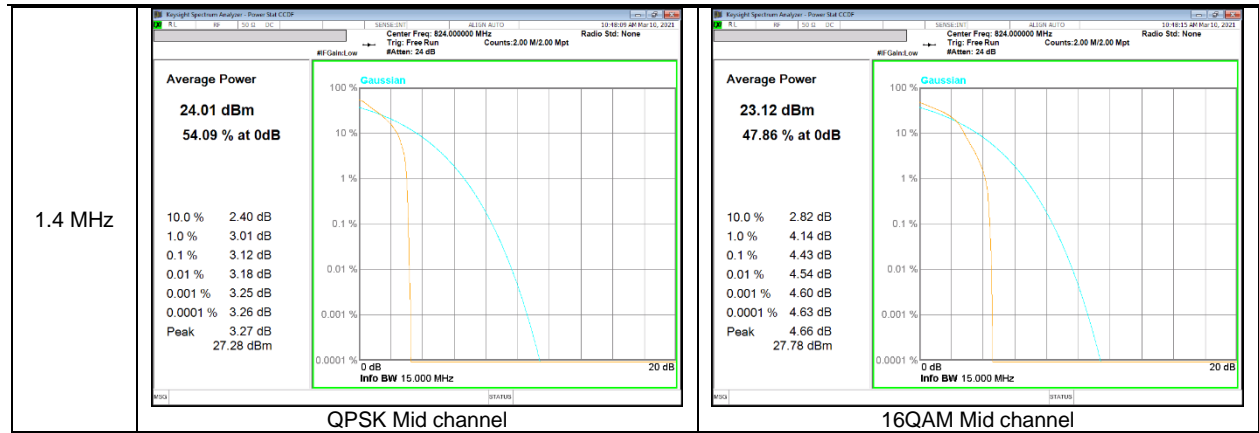

LTE Band 26 (Part 22)

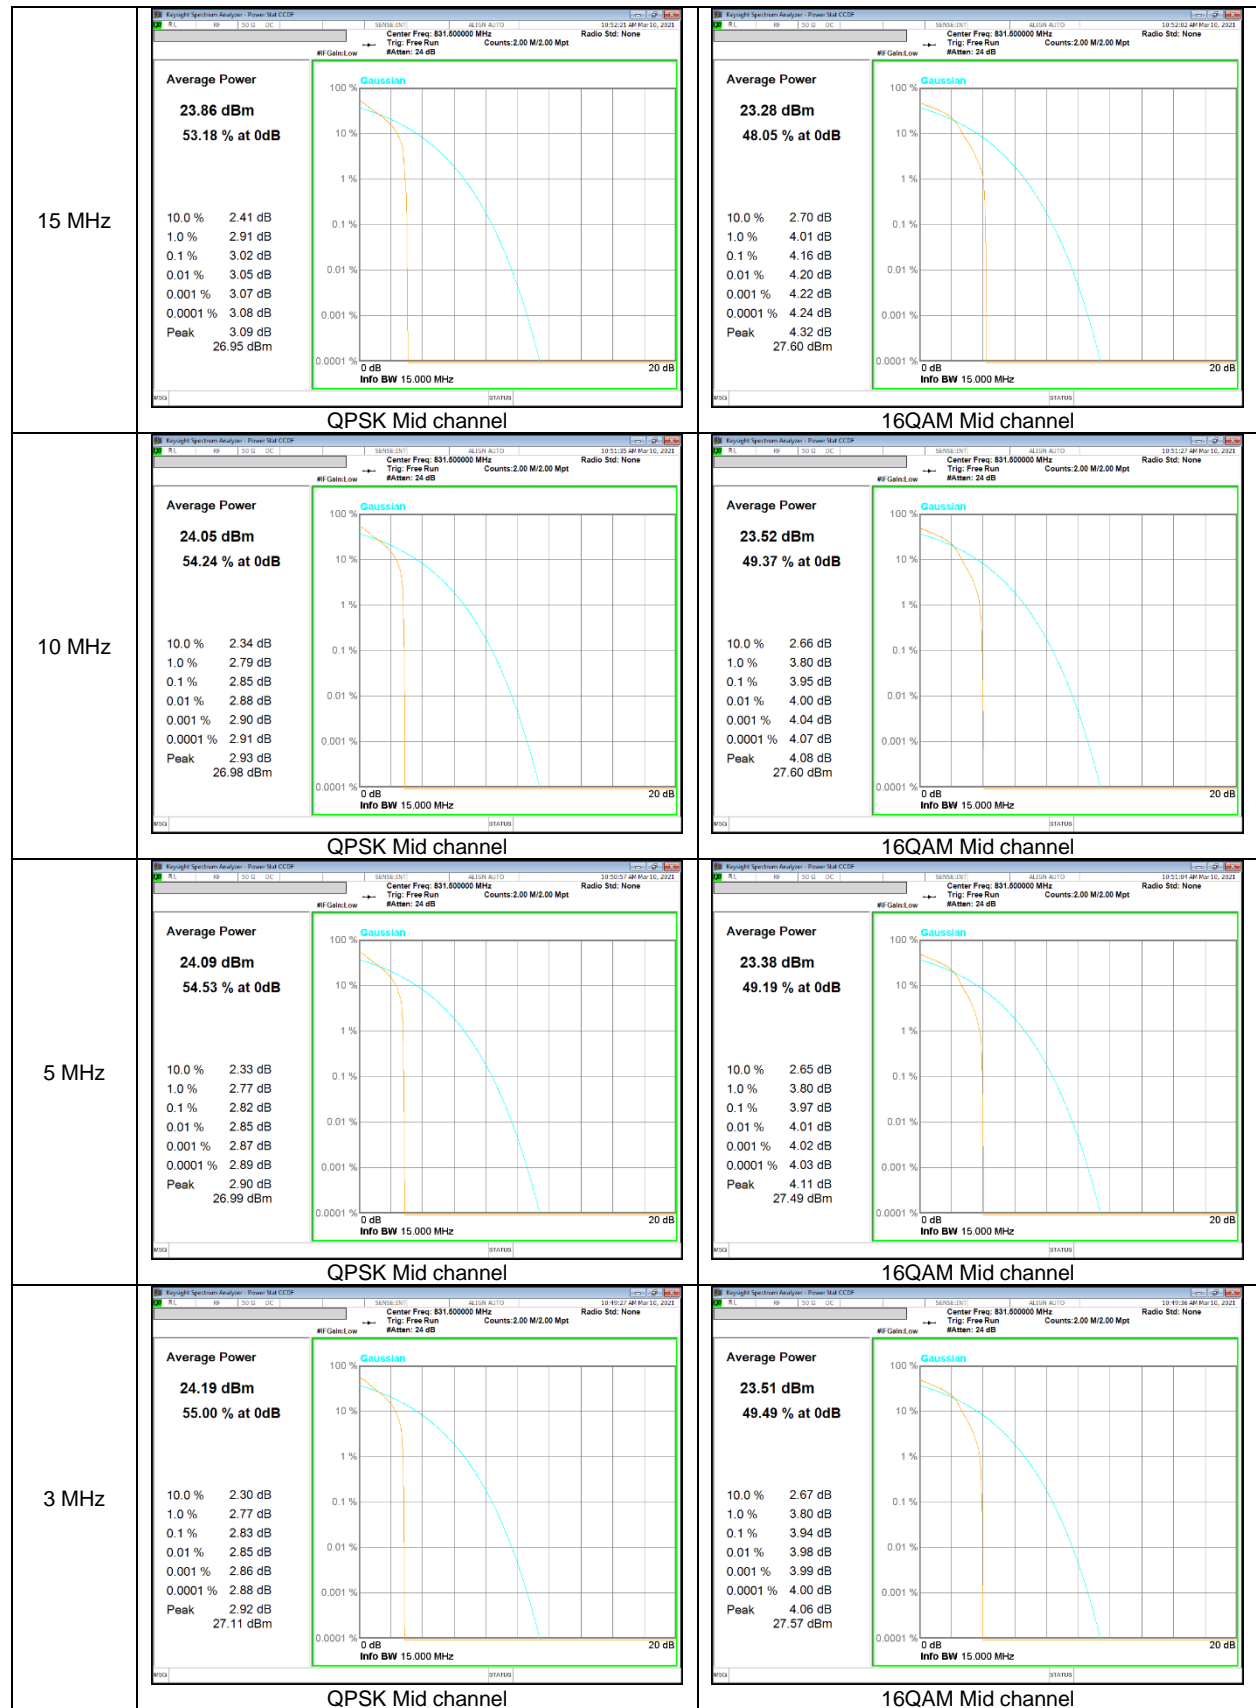

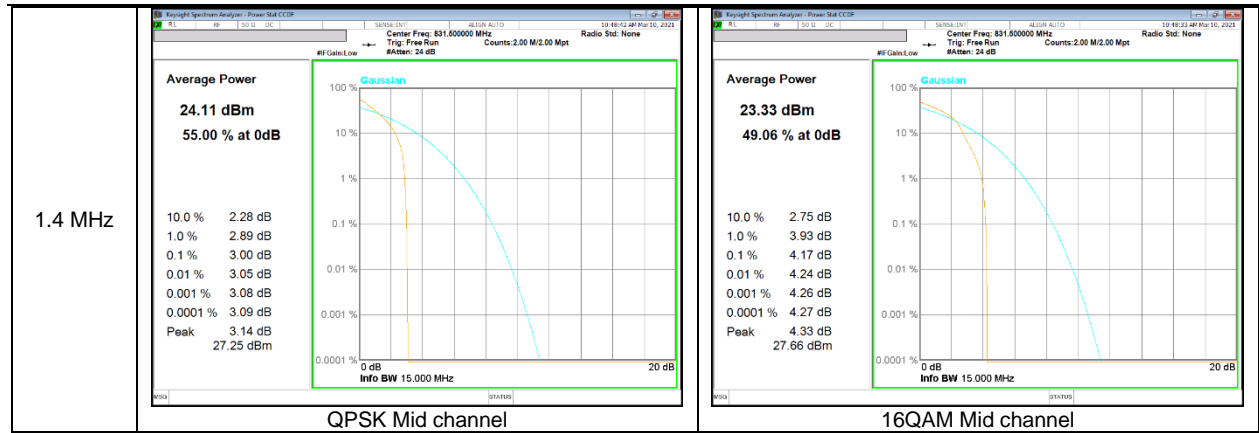


LTE Band 41



LTE Band 66



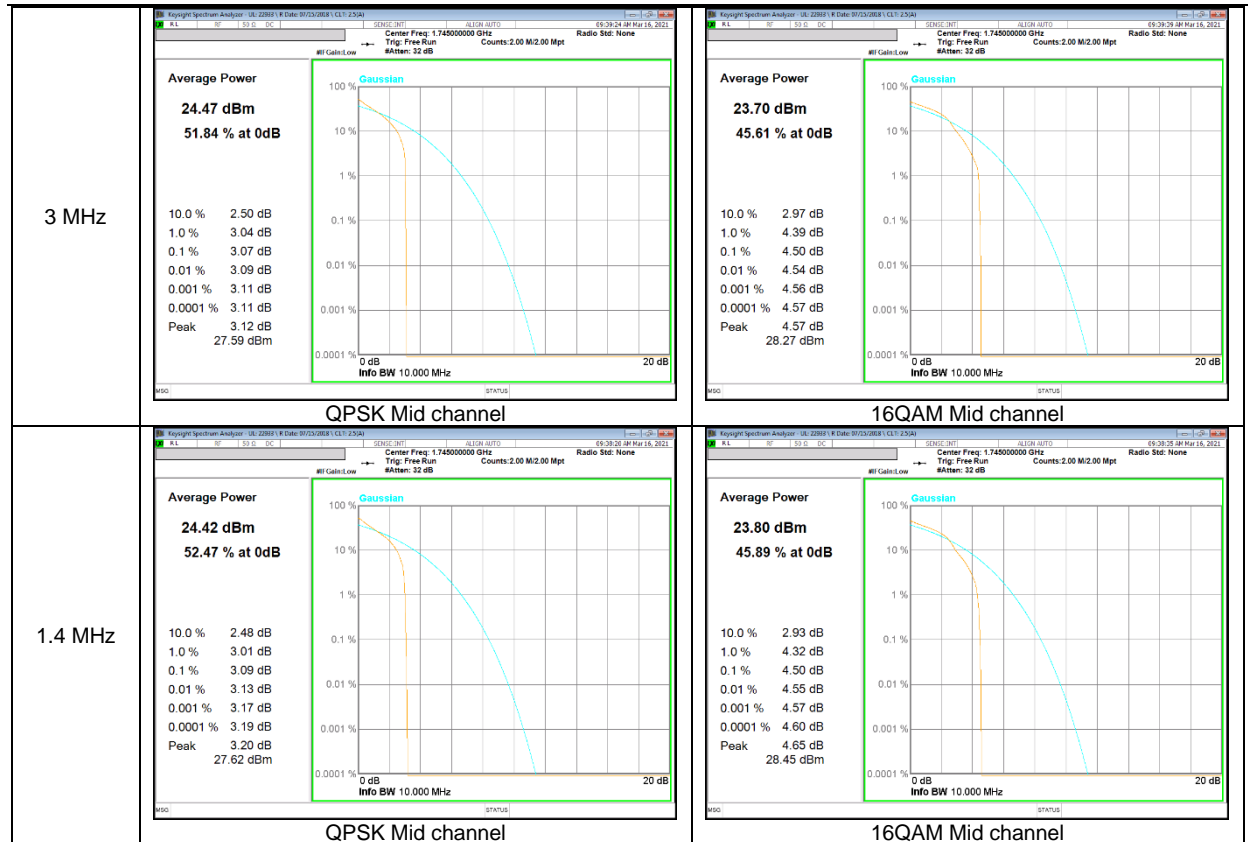

LTE Band 2

LTE Band 2(Frequency range: 1850-1910 MHz) is covered by LTE Band 25 (Frequency range: 1850-1915 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 4

LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 5

LTE Band 5 (Frequency range: 824-849 MHz) is covered by LTE Band 26 (Frequency range: 814-849 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 17

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

9. LIMITS AND CONDUCTED RESULTS

9.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v03r01)

RESULTS

See the following pages.

- GSM

Band	Modulation	f [MHz]	99% BW (kHz)	-26dB BW (kHz)
850	GPRS	836.6	244.84	313.0
	EGPRS		240.93	316.5
1900	GPRS	1880.0	242.79	310.4
	EGPRS		240.90	308.6

- WCDMA

Band	Modulation	f [MHz]	99% BW (MHz)	-26dB BW (MHz)
B5	Rel.99	836.6	4.137	4.682
	HSDPA		4.142	4.669
B4	Rel.99	1732.6	4.153	4.691
	HSDPA		4.147	4.665
B2	Rel.99	1880.0	4.147	4.705
	HSDPA		4.146	4.667

- LTE Band 12

Band	BW	Modulation	f [MHz]	99% BW (MHz)	-26dB BW (MHz)
LTE B12	10M	QPSK	707.5	8.951	9.724
		16QAM		8.925	9.703
	5M	QPSK	707.5	4.484	4.899
		16QAM		4.481	4.879
	3M	QPSK	707.5	2.699	2.968
		16QAM		2.685	2.996
	1.4M	QPSK	707.5	1.082	1.215
		16QAM		1.086	1.228

- LTE Band 13

Band	BW	Modulation	f [MHz]	99% BW (MHz)	-26dB BW (MHz)
LTE B13	10M	QPSK	782.0	8.963	9.765
		16QAM		8.971	9.663
	5M	QPSK	782.0	4.487	4.896
		16QAM		4.489	4.900

- LTE Band 25

Band	BW	Modulation	f [MHz]	99% BW (MHz)	-26dB BW (MHz)
LTE B25	20M	QPSK	1882.5	17.933	20.640
		16QAM		17.899	19.150
	15M	QPSK	1882.5	13.446	14.630
		16QAM		13.416	14.470
	10M	QPSK	1882.5	8.977	9.786
		16QAM		8.966	9.686
	5M	QPSK	1882.5	4.494	4.972
		16QAM		4.504	4.928
	3M	QPSK	1882.5	2.700	2.998
		16QAM		2.688	2.928
	1.4M	QPSK	1882.5	1.081	1.230
		16QAM		1.087	1.228

- LTE Band 26 (Part 90)

Band	BW	Modulation	f [MHz]	99% BW (MHz)	-26dB BW (MHz)
LTE B26 Part(90)	15M	QPSK	821.5	13.395	14.580
		16QAM		13.408	14.430
	10M	QPSK	819.0	8.952	9.759
		16QAM		8.953	9.711
	5M	QPSK	819.0	4.477	4.906
		16QAM		4.486	4.934
	3M	QPSK	819.0	2.700	2.949
		16QAM		2.691	2.982
	1.4M	QPSK	819.0	1.081	1.223
		16QAM		1.083	1.212

- LTE Band 26 (Straddle)

Band	BW	Modulation	f [MHz]	99% BW (MHz)	-26dB BW (MHz)
LTE B26 (Straddle)	15M	QPSK	824.0	13.394	14.560
		16QAM		13.424	14.500
	10M	QPSK	824.0	8.939	9.711
		16QAM		8.948	9.636
	5M	QPSK	824.0	4.486	4.924
		16QAM		4.495	4.913
	3M	QPSK	824.0	2.699	2.975
		16QAM		2.688	2.952
	1.4M	QPSK	824.0	1.085	1.220
		16QAM		1.088	1.229

- LTE Band 26 (Part 22)

Band	BW	Modulation	f [MHz]	99% BW (MHz)	-26dB BW (MHz)
LTE B26 (Part 22)	15M	QPSK	831.5	13.430	14.540
		16QAM		13.400	14.450
	10M	QPSK	831.5	8.951	9.649
		16QAM		8.945	9.697
	5M	QPSK	831.5	4.494	4.950
		16QAM		4.483	4.910
	3M	QPSK	831.5	2.695	2.984
		16QAM		2.688	2.988
	1.4M	QPSK	831.5	1.086	1.214
		16QAM		1.086	1.232

- LTE Band 41

Band	BW	Modulation	f [MHz]	99% BW (MHz)	-26dB BW (MHz)
LTE B41	20M	QPSK	2593.0	17.906	20.680
		16QAM		17.892	19.410
	15M	QPSK	2593.0	13.425	17.910
		16QAM		13.436	14.690
	10M	QPSK	2593.0	8.970	9.720
		16QAM		8.943	9.628
	5M	QPSK	2593.0	4.495	4.967
		16QAM		4.486	4.936

- LTE Band 66


Band	BW	Modulation	f [MHz]	99% BW (MHz)	-26dB BW (MHz)
LTE B66	20M	QPSK	1745.0	17.856	19.250
		16QAM		17.849	19.320
	15M	QPSK	1745.0	13.413	14.580
		16QAM		13.408	14.490
	10M	QPSK	1745.0	8.983	9.788
		16QAM		8.981	9.719
	5M	QPSK	1745.0	4.494	4.927
		16QAM		4.482	4.904
	3M	QPSK	1745.0	2.690	2.968
		16QAM		2.687	2.968
	1.4M	QPSK	1745.0	1.090	1.218
		16QAM		1.085	1.231

9.1.1. OCCUPIED BANDWIDTH RESULTS

GSM



WCDMA

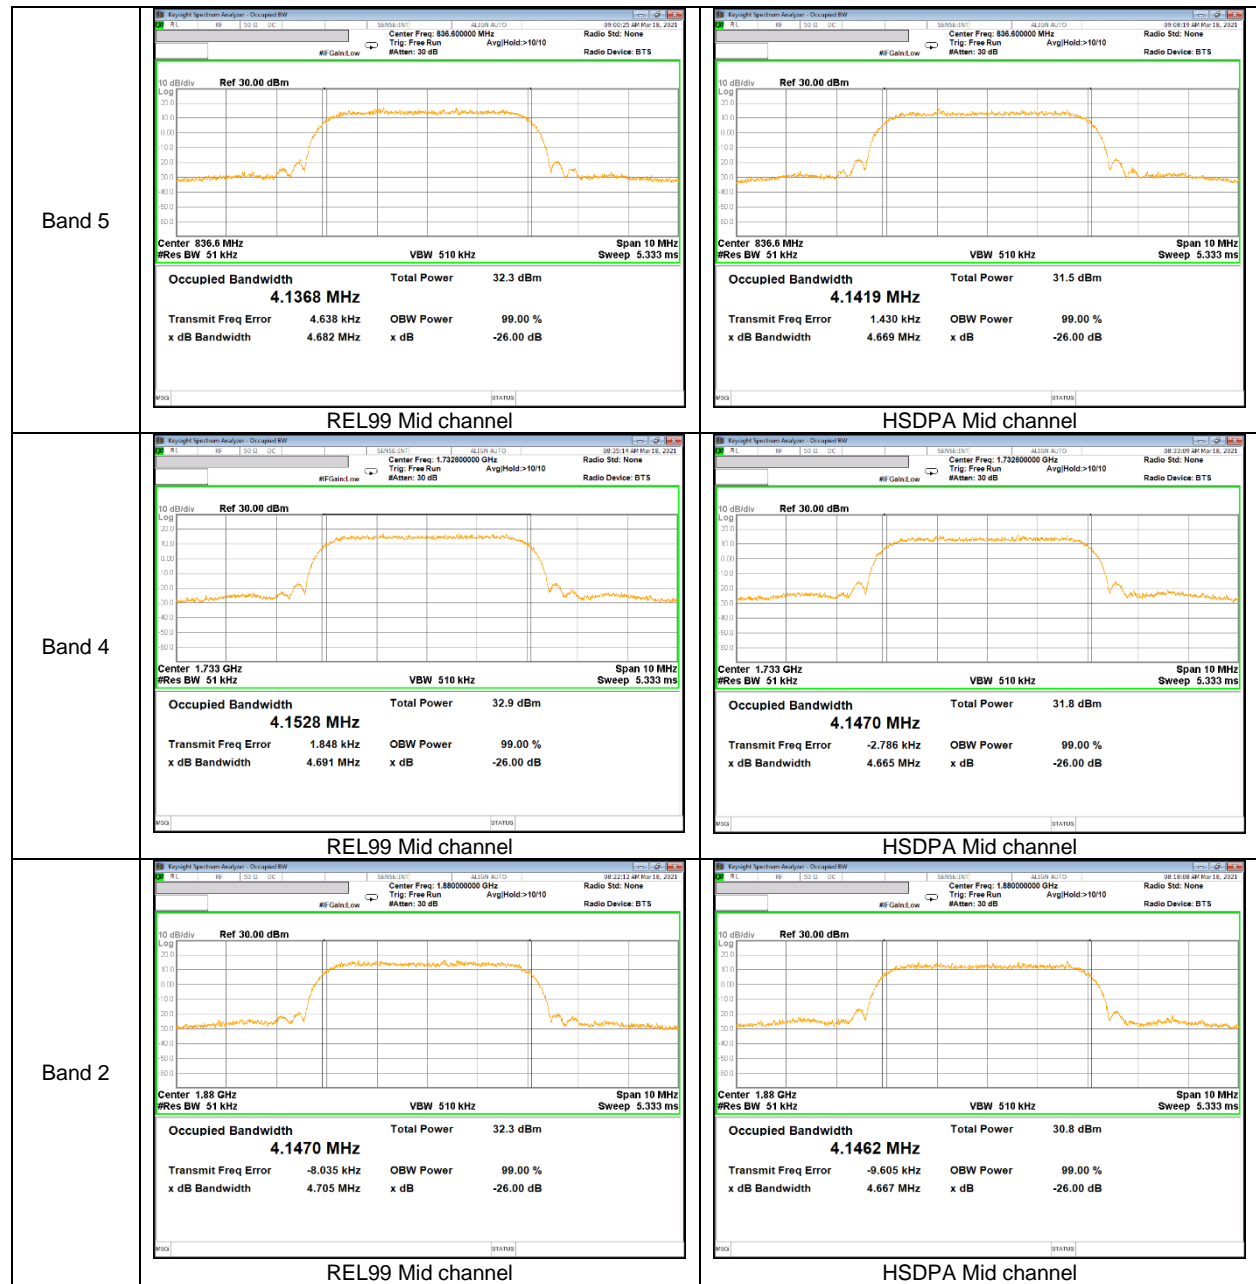

LTE Band 12



LTE Band 13

