

## GSM 850

Frequency: 824.2 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used:  $f = 825 \text{ MHz}$ ;  $\sigma = 0.991 \text{ S/m}$ ;  $\epsilon_r = 54.613$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2015-09-15
- Probe: EX3DV4 - SN7376; ConvF(10.07, 10.07, 10.07); Calibrated: 2015-09-02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Rear/GPRS 2slots\_ch 128/Area Scan (13x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.12 W/kg


**Rear/GPRS 2slots\_ch 128/Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.85 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.56 W/kg

**SAR(1 g) = 0.807 W/kg; SAR(10 g) = 0.429 W/kg**

Maximum value of SAR (measured) = 1.19 W/kg

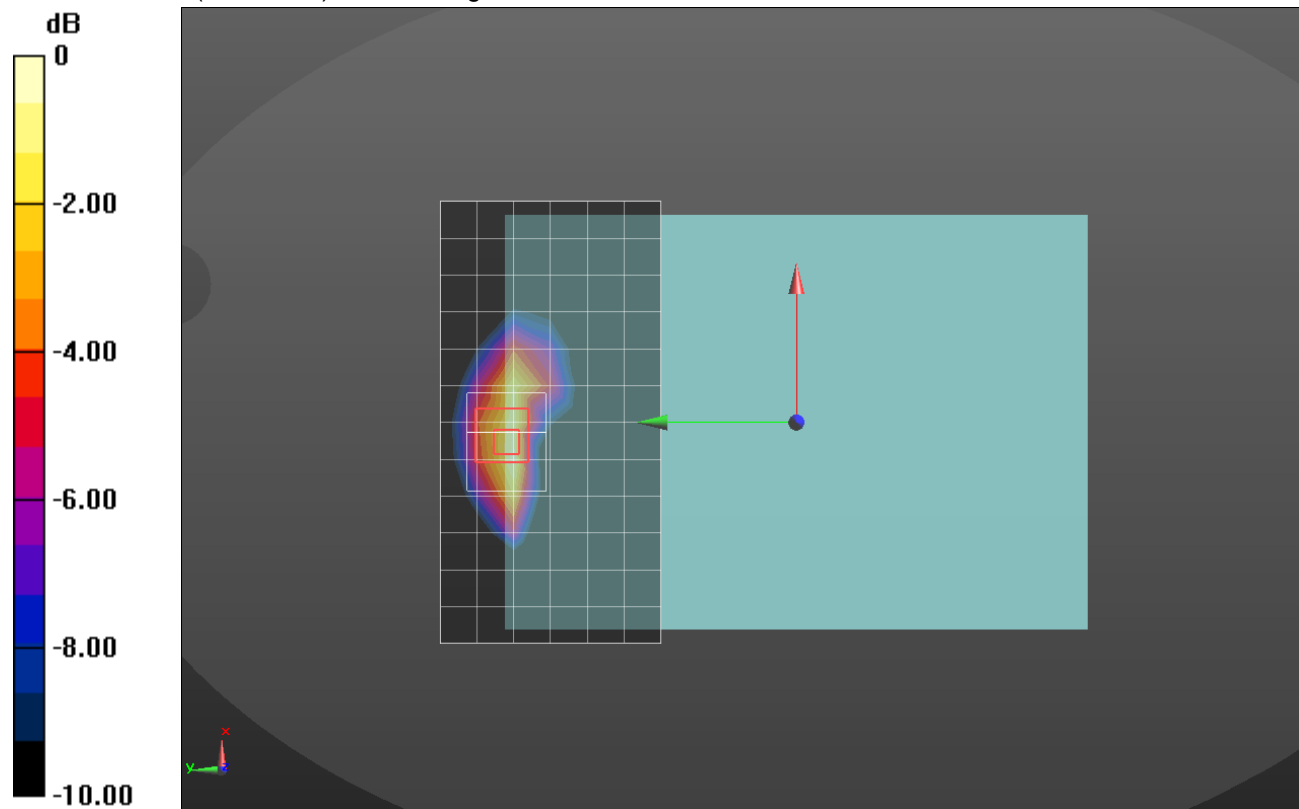

0 dB = 1.19 W/kg = 0.76 dBW/kg

## GSM 1900\_Rear

Frequency: 1880 MHz; Duty Cycle: 1:4.00037; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.499 \text{ S/m}$ ;  $\epsilon_r = 51.139$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2015-11-11
- Probe: EX3DV4 - SN7313; ConvF(7.54, 7.54, 7.54); Calibrated: 2015-12-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Rear/GPRS 2slots\_ch 661/Area Scan (13x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.589 W/kg


**Rear/GPRS 2slots\_ch 661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.25 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.253 W/kg**

Maximum value of SAR (measured) = 0.842 W/kg

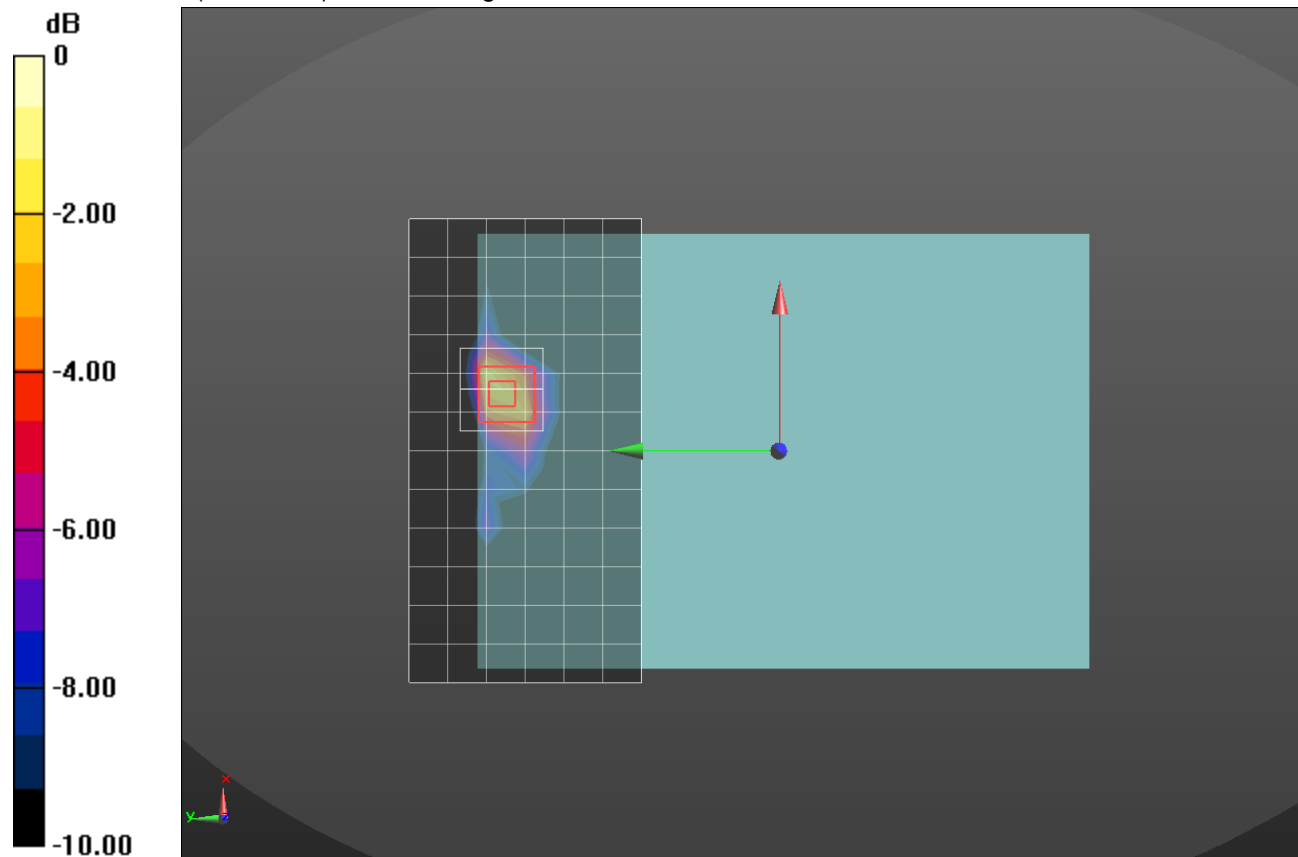

0 dB = 0.842 W/kg = -0.75 dBW/kg

## WCDMA Band II

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.559 \text{ S/m}$ ;  $\epsilon_r = 55.401$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2015-09-23
- Probe: EX3DV4 - SN7314; ConvF(7.64, 7.64, 7.64); Calibrated: 2015-09-25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Rear/Rel.99\_ch 9400/Area Scan (14x8x1):** Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.497 W/kg

**Rear/Rel.99\_ch 9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.24 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.596 W/kg

**SAR(1 g) = 0.384 W/kg; SAR(10 g) = 0.235 W/kg**

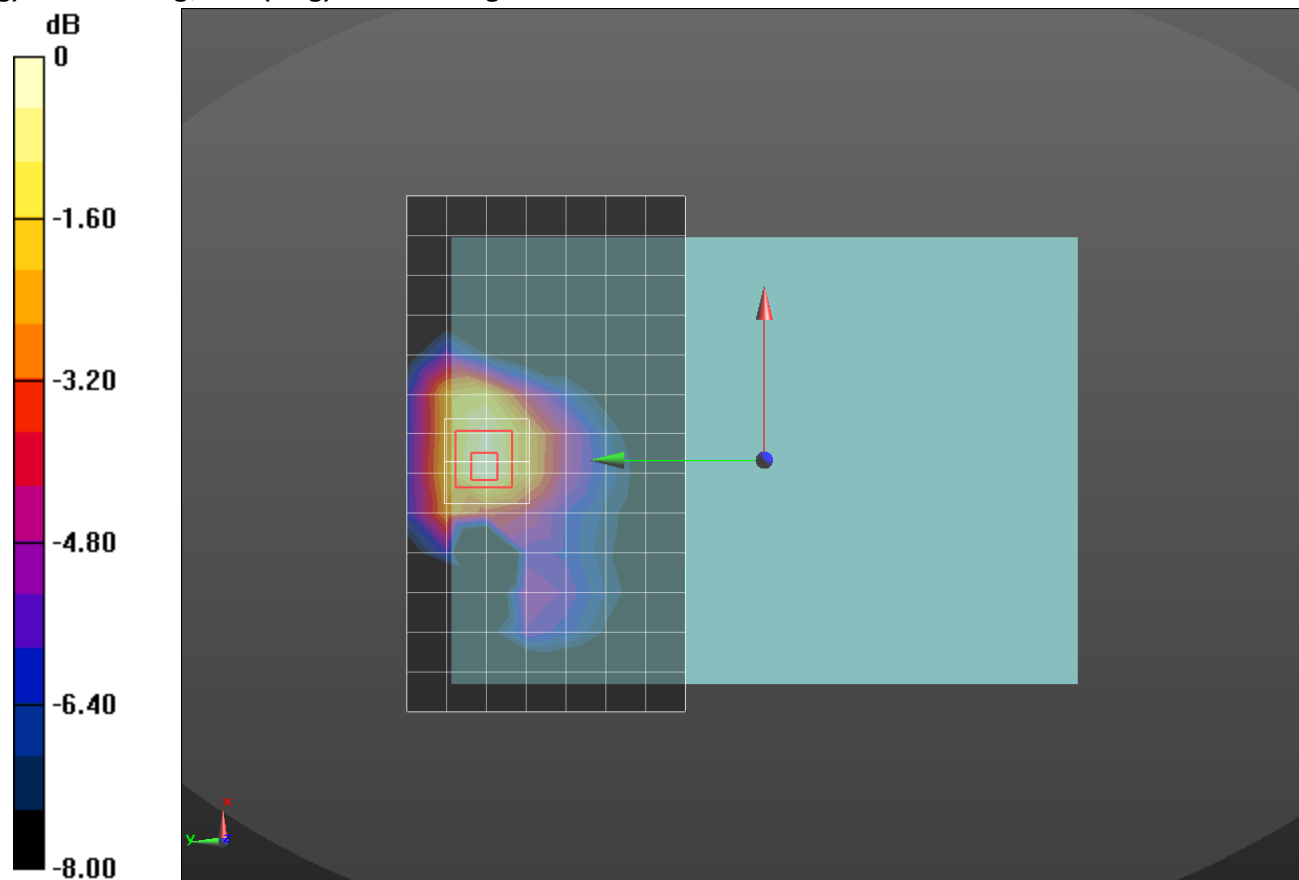

0 dB = 0.497 W/kg = -3.04 dBW/kg

## WCDMA Band IV

Frequency: 1732.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 1732.6$  MHz;  $\sigma = 1.423$  S/m;  $\epsilon_r = 53.921$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2015-09-15
- Probe: EX3DV4 - SN7376; ConvF(8.08, 8.08, 8.08); Calibrated: 2015-09-02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Edge 4/Rel.99\_ch 1413/Area Scan (5x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.752 W/kg


**Edge 4/Rel.99\_ch 1413/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.95 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.588 W/kg; SAR(10 g) = 0.283 W/kg**

Maximum value of SAR (measured) = 0.906 W/kg

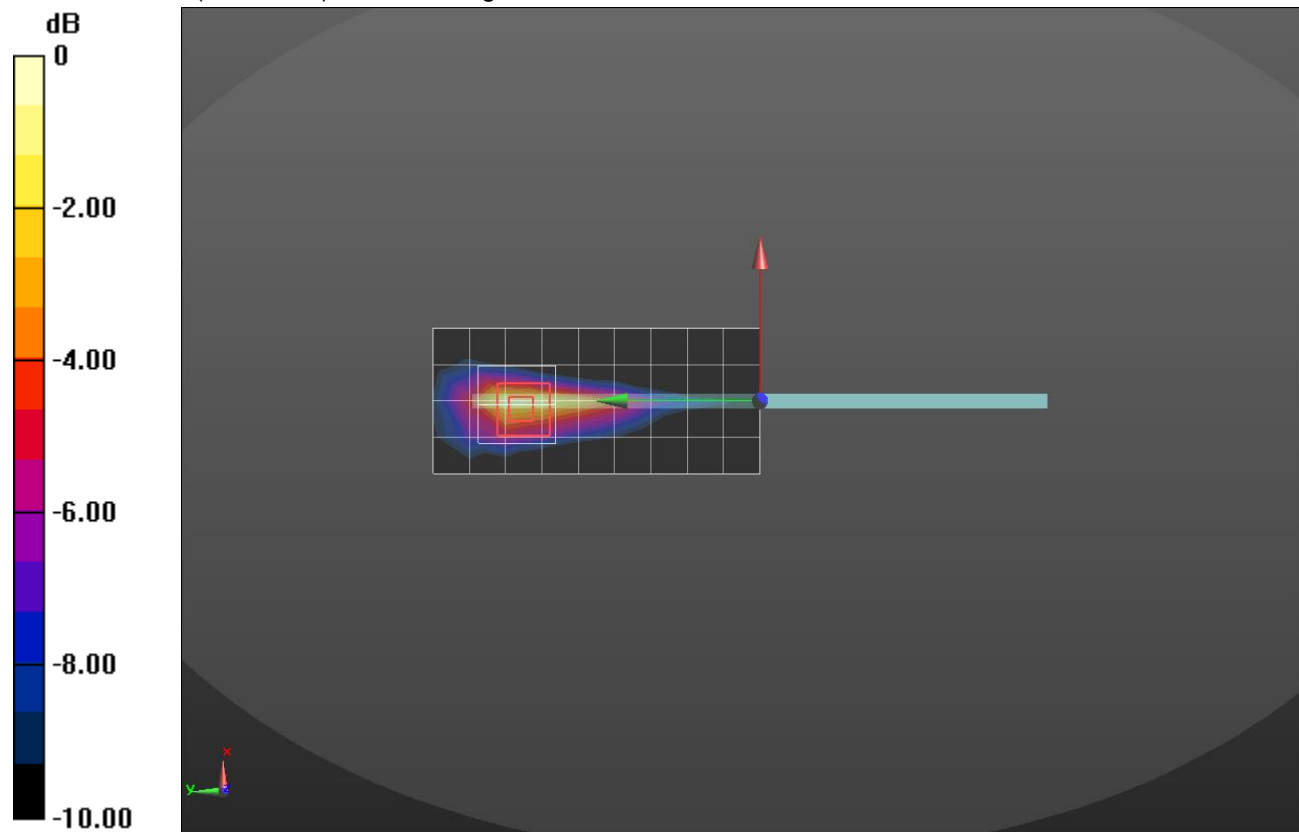

0 dB = 0.906 W/kg = -0.43 dBW/kg

## WCDMA Band V

Frequency: 836.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 1.002$  S/m;  $\epsilon_r = 53.705$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2015-09-23
- Probe: EX3DV4 - SN7314; ConvF(9.93, 9.93, 9.93); Calibrated: 2015-09-25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Rear/Rel.99\_Ch 4183/Area Scan (13x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.482 W/kg


**Rear/Rel.99\_Ch 4183/Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.786 W/kg

**SAR(1 g) = 0.396 W/kg; SAR(10 g) = 0.208 W/kg**

Maximum value of SAR (measured) = 0.595 W/kg

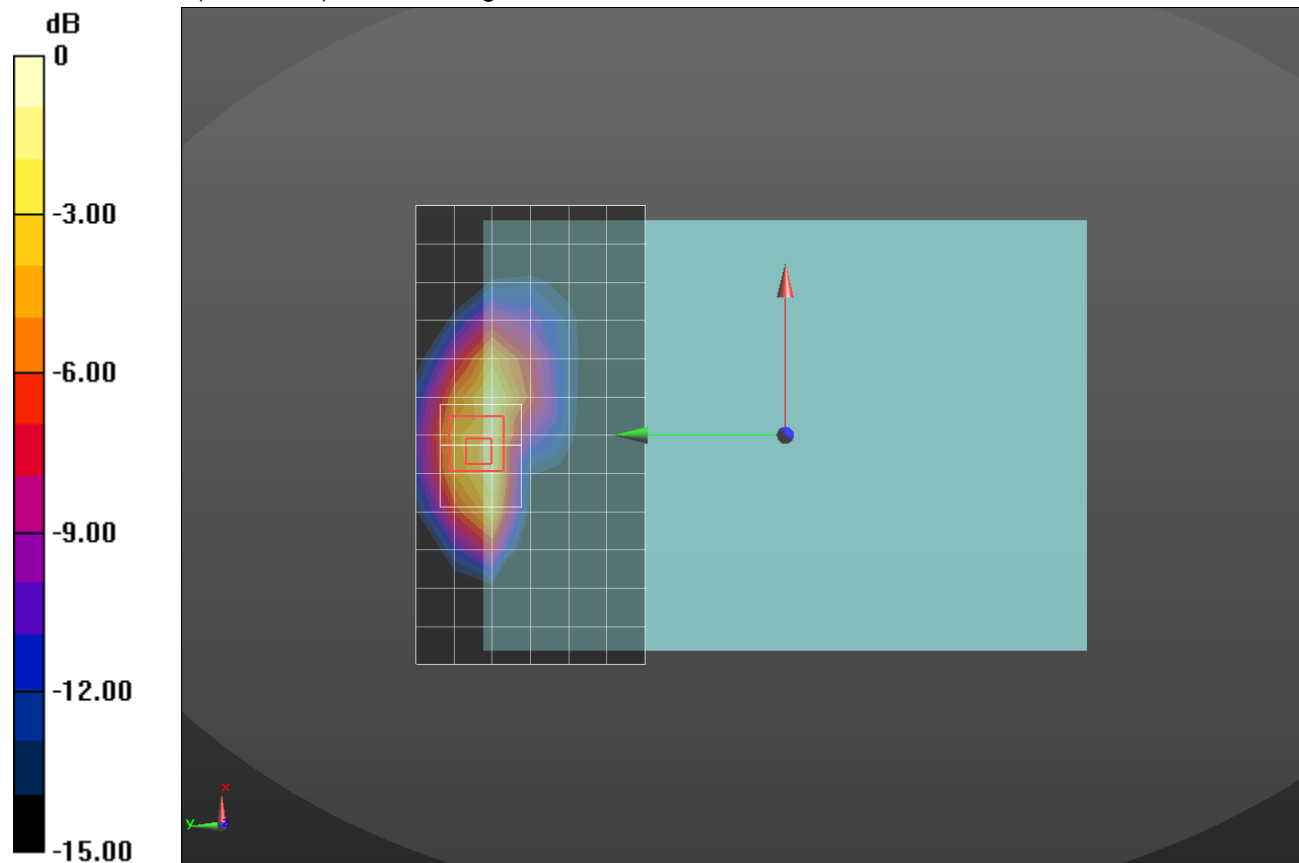

0 dB = 0.595 W/kg = -2.25 dBW/kg

## LTE Band2

Frequency: 1900 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.58 \text{ S/m}$ ;  $\epsilon_r = 51.233$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2015-11-11
- Probe: EX3DV4 - SN7313; ConvF(7.54, 7.54, 7.54); Calibrated: 2015-12-30;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Rear/QPSK RB 1/49 ch 19100/Area Scan (10x7x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.920 W/kg


**Rear/QPSK RB 1/49 ch 19100/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 24.47 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.71 W/kg

**SAR(1 g) = 0.811 W/kg; SAR(10 g) = 0.349 W/kg**

Maximum value of SAR (measured) = 1.16 W/kg

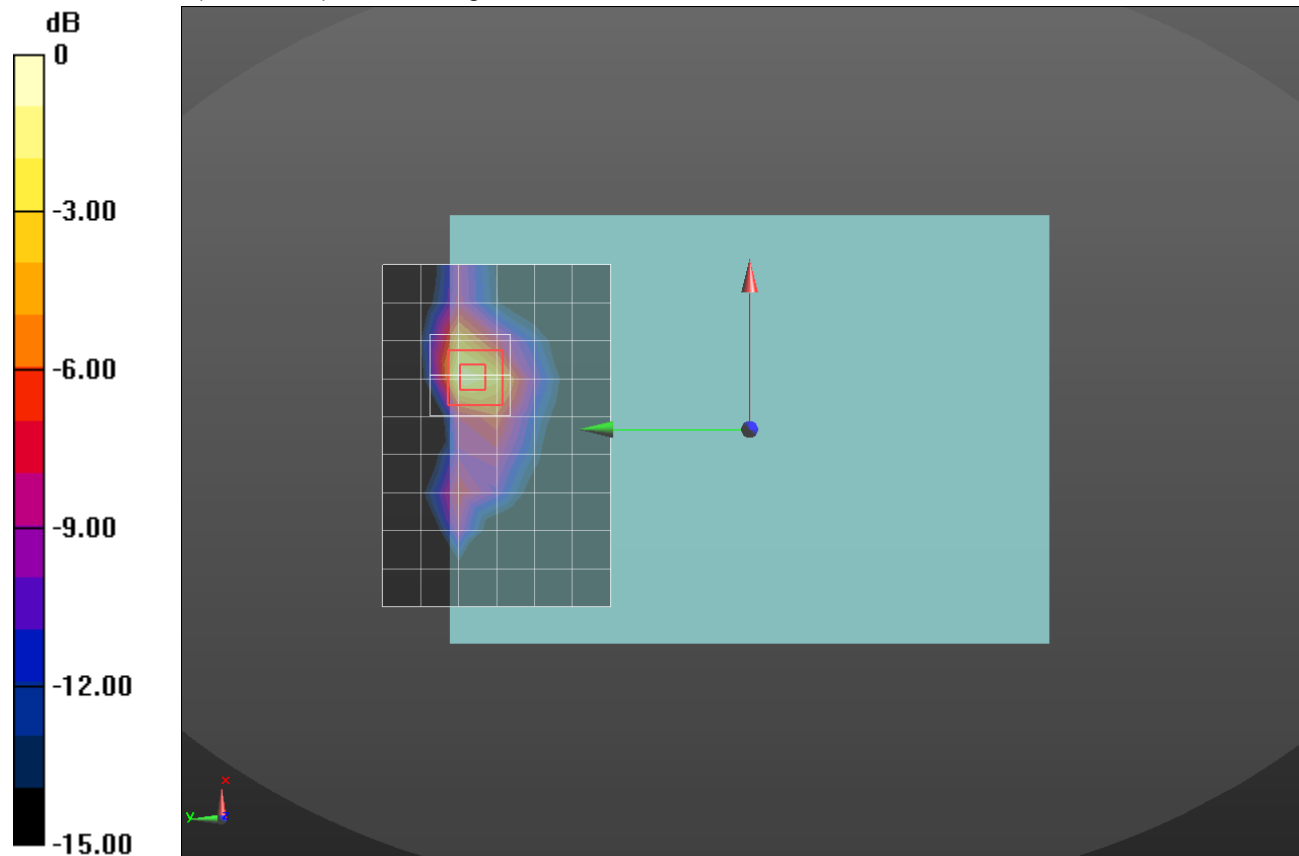

0 dB = 1.16 W/kg = 0.64 dBW/kg

## LTE Band IV

Frequency: 1720 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used:  $f = 1720 \text{ MHz}$ ;  $\sigma = 1.419 \text{ S/m}$ ;  $\epsilon_r = 53.697$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1468; Calibrated: 2015-09-15
- Probe: EX3DV4 - SN7376; ConvF(8.08, 8.08, 8.08); Calibrated: 2015-09-02;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Rear/QPSK RB 1/49 ch 20050/Area Scan (10x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.933 W/kg


**Rear/QPSK RB 1/49 ch 20050/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.85 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.694 W/kg; SAR(10 g) = 0.313 W/kg**

Maximum value of SAR (measured) = 1.00 W/kg

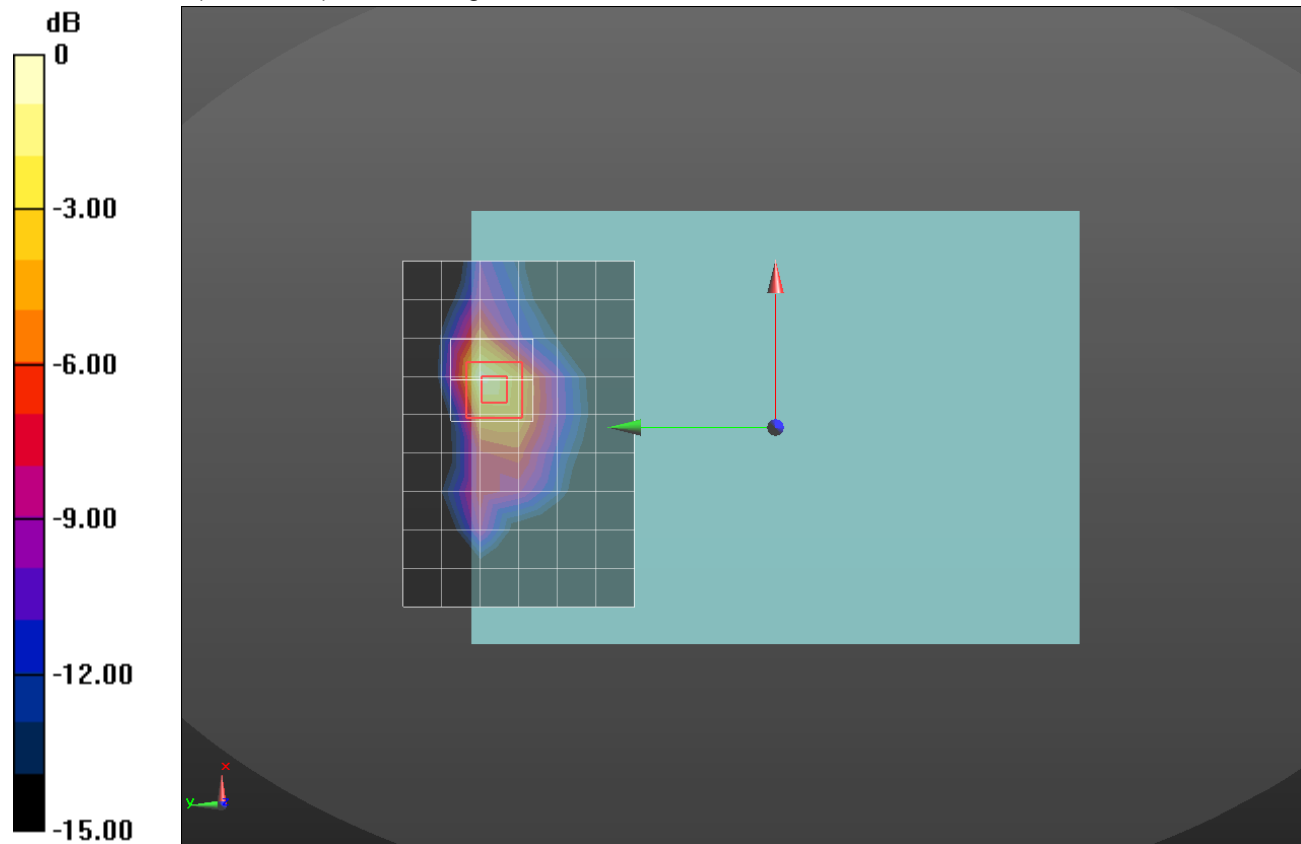

0 dB = 1.00 W/kg = 0.00 dBW/kg

## LTE Band5

Frequency: 836.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.967$  S/m;  $\epsilon_r = 57.542$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2015-09-23
- Probe: EX3DV4 - SN7314; ConvF(9.93, 9.93, 9.93); Calibrated: 2015-09-25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Rear/QPSK RB 1/25 ch 20525/Area Scan (13x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.766 W/kg


**Rear/QPSK RB 1/25 ch 20525/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.39 W/kg

**SAR(1 g) = 0.706 W/kg; SAR(10 g) = 0.378 W/kg**

Maximum value of SAR (measured) = 0.967 W/kg

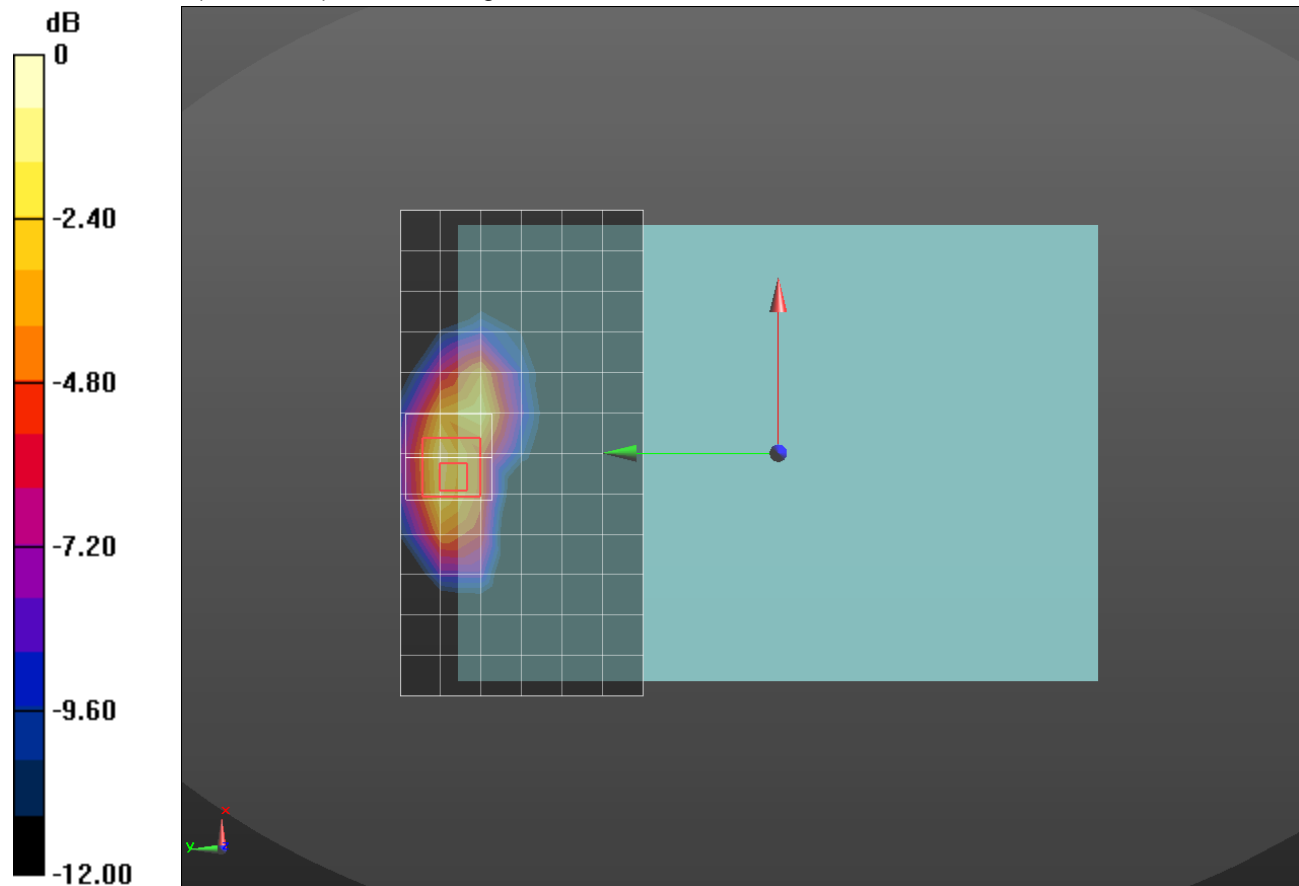

0 dB = 0.967 W/kg = -0.15 dBW/kg

## LTE Band 17

Frequency: 710 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.921 \text{ S/m}$ ;  $\epsilon_r = 54.882$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2015-09-23
- Probe: EX3DV4 - SN7314; ConvF(10.1, 10.1, 10.1); Calibrated: 2015-09-25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Edge 1/QPSK RB 1/25 ch 23790/Area Scan (6x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.01 W/kg


**Edge 1/QPSK RB 1/25 ch 23790/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 36.51 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.56 W/kg

**SAR(1 g) = 0.777 W/kg; SAR(10 g) = 0.416 W/kg**

Maximum value of SAR (measured) = 1.17 W/kg

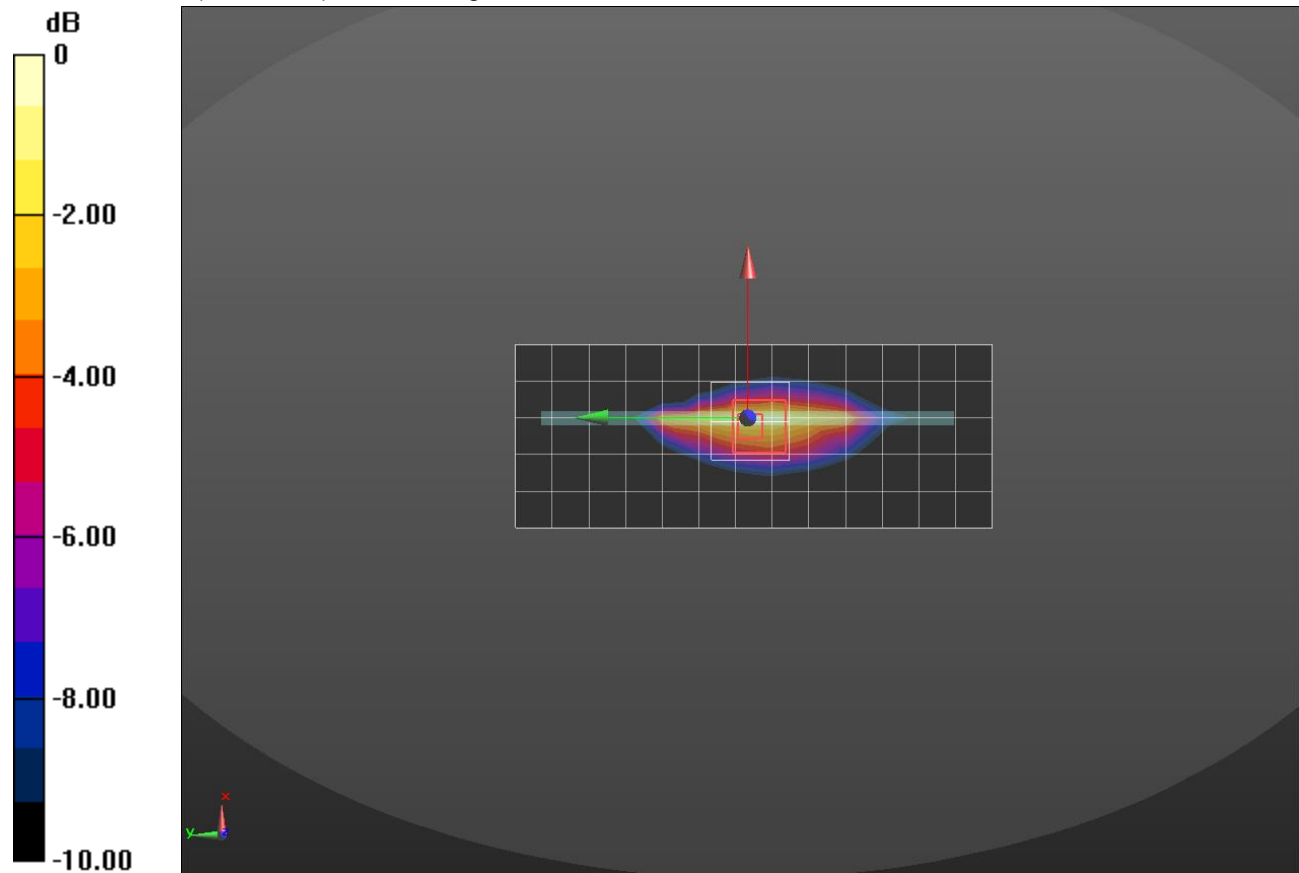

0 dB = 1.17 W/kg = 0.68 dBW/kg

## Wi-Fi\_2.4GHz\_Reduce

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.974$  S/m;  $\epsilon_r = 52.545$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2015-09-23
- Probe: EX3DV4 - SN7314; ConvF(7.28, 7.28, 7.28); Calibrated: 2015-09-25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Rear/802.11b\_ch 6 SISO Chan 1/Area Scan (11x6x1):** Measurement grid: dx=12mm, dy=12mm


Maximum value of SAR (measured) = 1.66 W/kg

**Rear/802.11b\_ch 6 SISO Chan 1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.72 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 3.35 W/kg

**SAR(1 g) = 0.976 W/kg; SAR(10 g) = 0.331 W/kg**

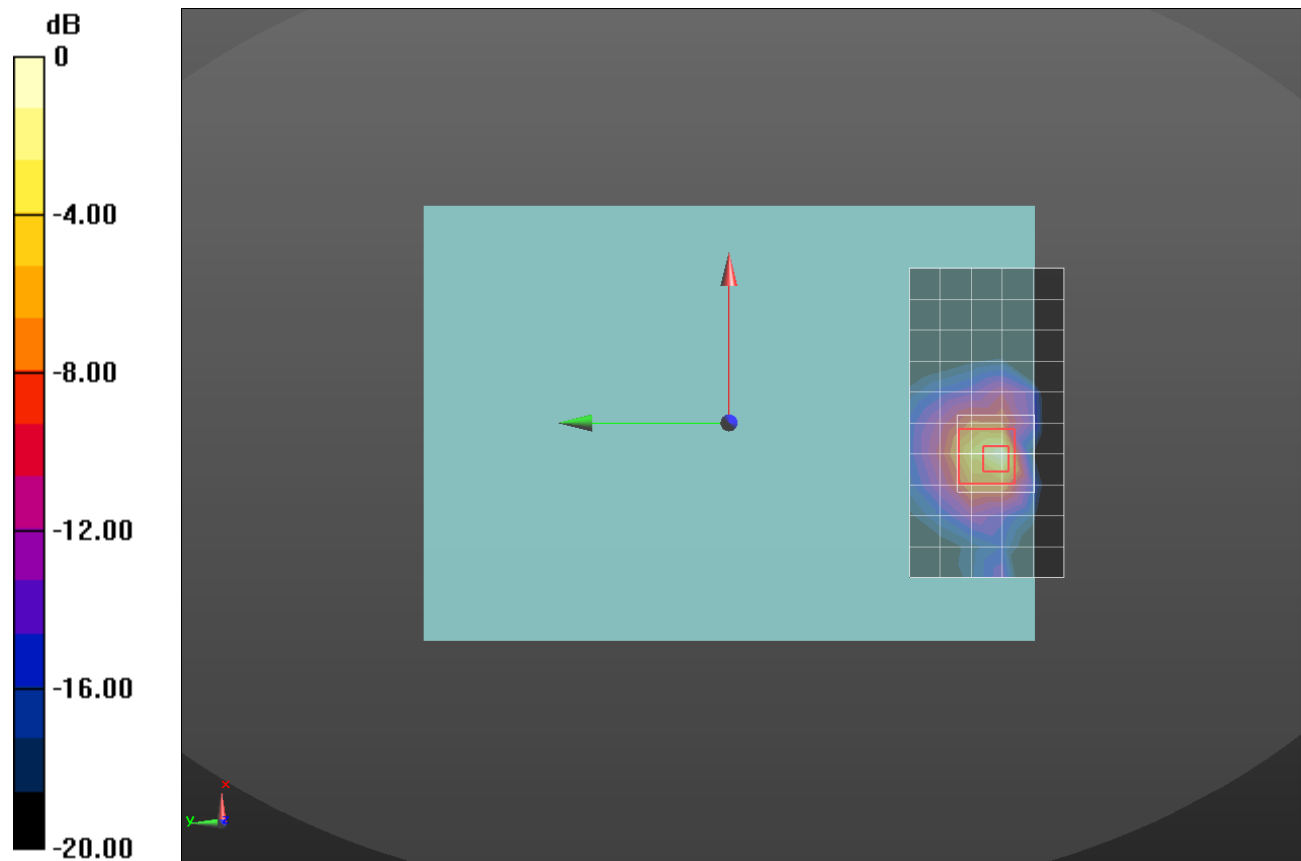

0 dB = 1.66 W/kg = 2.20 dBW/kg

## Wi-Fi\_2.4GHz

Frequency: 2412 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 2412 \text{ MHz}$ ;  $\sigma = 1.944 \text{ S/m}$ ;  $\epsilon_r = 52.632$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2015-09-23
- Probe: EX3DV4 - SN7314; ConvF(7.28, 7.28, 7.28); Calibrated: 2015-09-25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Rear/802.11b\_ch 1 SISO Chan 0/Area Scan (6x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.02 W/kg


**Rear/802.11b\_ch 1 SISO Chan 0/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.32 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.80 W/kg

**SAR(1 g) = 0.771 W/kg; SAR(10 g) = 0.333 W/kg**

Maximum value of SAR (measured) = 1.13 W/kg

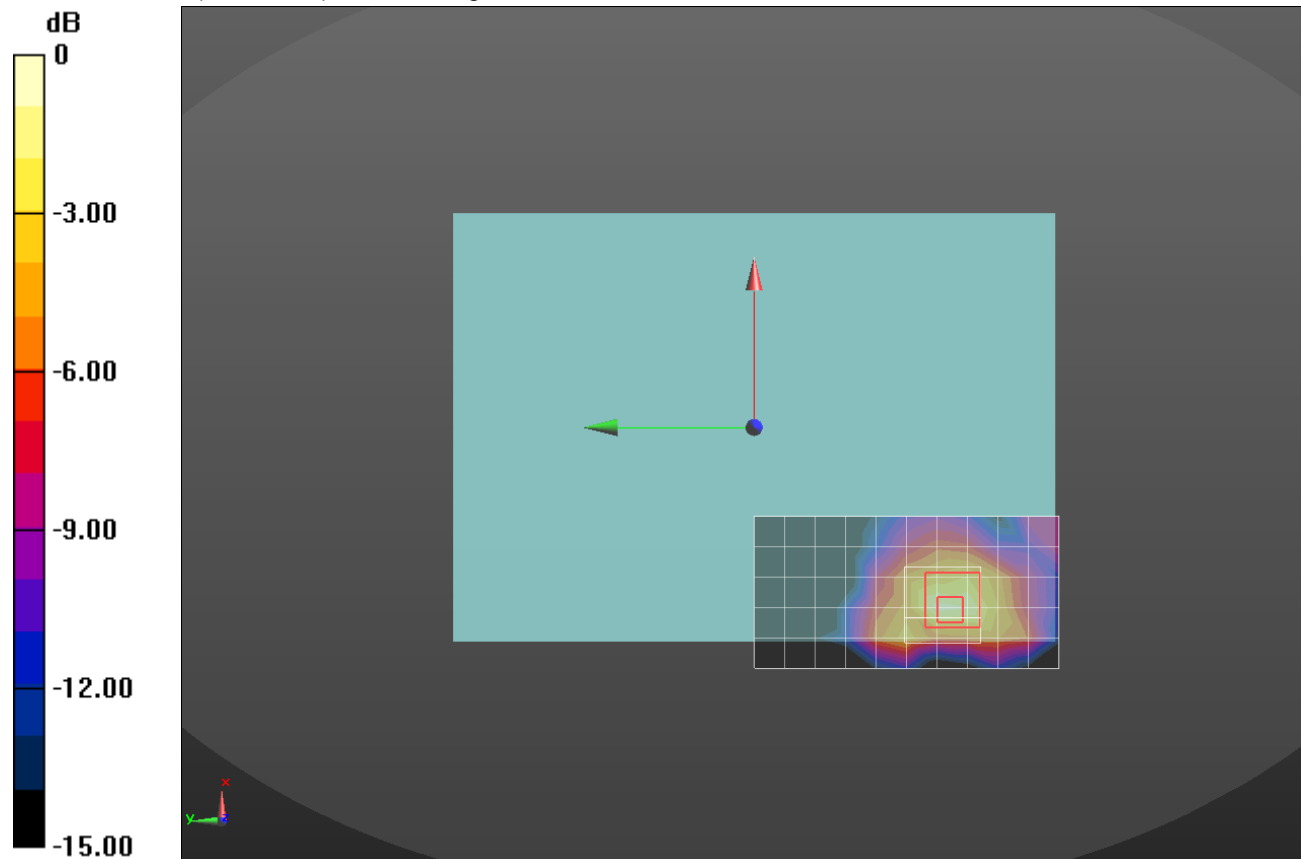

0 dB = 1.13 W/kg = 0.53 dBW/kg

## Wi-Fi\_2.4GHz\_Reduce

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.933$  S/m;  $\epsilon_r = 51.963$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2015-09-23
- Probe: EX3DV4 - SN7314; ConvF(7.28, 7.28, 7.28); Calibrated: 2015-09-25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Rear/802.11n HT20\_ch 6 MIMO Chan 0 & 1/Area Scan (17x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.66 W/kg

**Rear/802.11n HT20\_ch 6 MIMO Chan 0 & 1/Zoom Scan (8x8x7)/Cube 0:** Measurement grid:

dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.86 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.10 W/kg

**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.348 W/kg**

Maximum value of SAR (measured) = 1.85 W/kg

**Rear/802.11n HT20\_ch 6 MIMO Chan 0 & 1/Zoom Scan 2 (8x7x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.86 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.03 W/kg

**SAR(1 g) = 0.783 W/kg; SAR(10 g) = 0.306 W/kg**

Maximum value of SAR (measured) = 1.30 W/kg

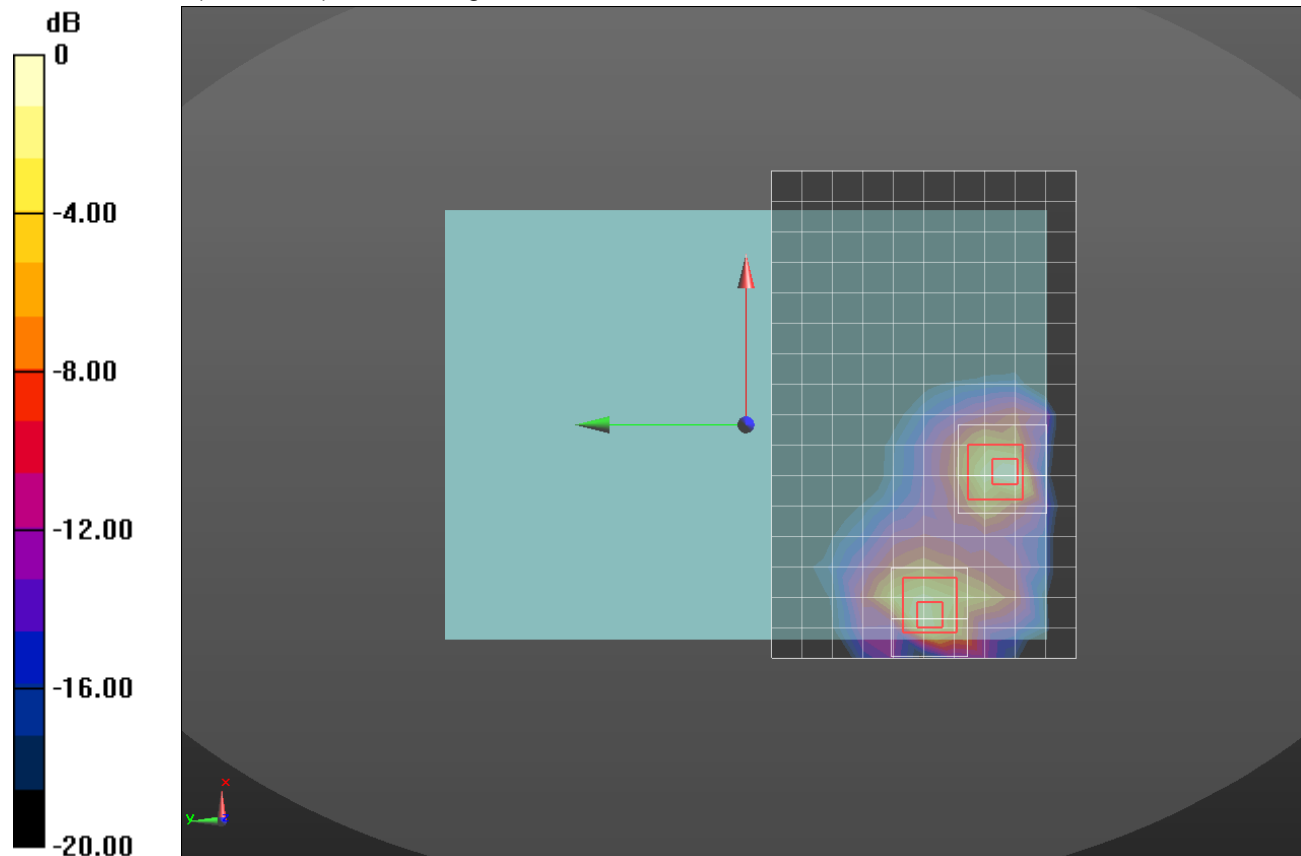

0 dB = 1.30 W/kg = 1.14 dBW/kg

## Wi-Fi\_5.3Ghz

Frequency: 5320 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used:  $f = 5320 \text{ MHz}$ ;  $\sigma = 5.494 \text{ S/m}$ ;  $\epsilon_r = 48.494$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2015-11-11
- Probe: EX3DV4 - SN7313; ConvF(4.12, 4.12, 4.12); Calibrated: 2015-12-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Rear/802.11a\_ch 64 SISO Chain 0/Area Scan (8x12x1):** Measurement grid: dx=10mm, dy=10mm  
 Maximum value of SAR (measured) = 0.869 W/kg


**Rear/802.11a\_ch 64 SISO Chain 0/Zoom Scan (9x9x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 14.02 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.63 W/kg

**SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.088 W/kg**

Maximum value of SAR (measured) = 0.828 W/kg

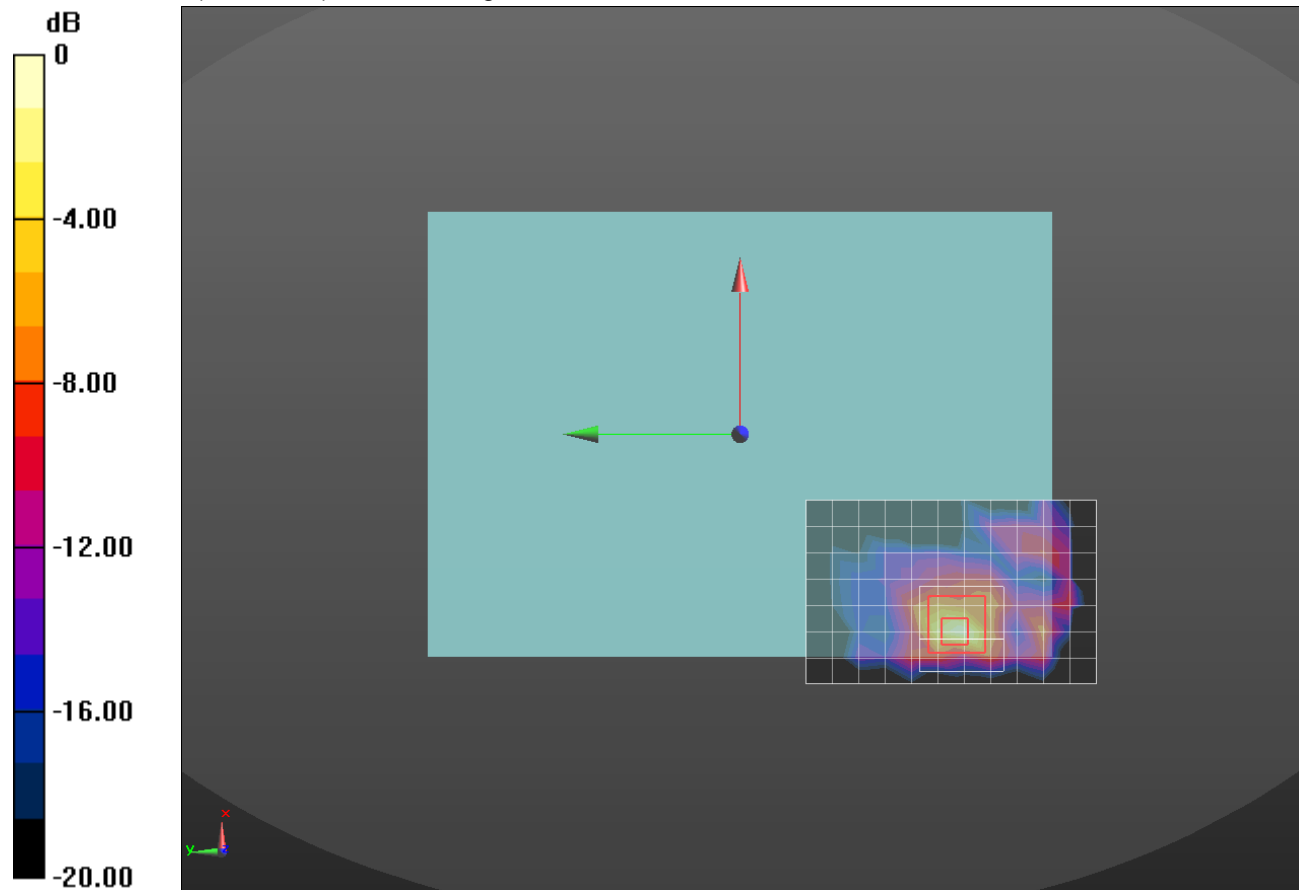

0 dB = 0.828 W/kg = -0.82 dBW/kg

## Wi-Fi\_5.3Ghz

Frequency: 5280 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used:  $f = 5280 \text{ MHz}$ ;  $\sigma = 5.439 \text{ S/m}$ ;  $\epsilon_r = 48.563$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2015-11-11
- Probe: EX3DV4 - SN7313; ConvF(4.12, 4.12, 4.12); Calibrated: 2015-12-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Rear/802.11a\_ch 56 SISO Chain 1/Area Scan (11x8x1):** Measurement grid: dx=10mm, dy=10mm  
 Maximum value of SAR (measured) = 0.701 W/kg


**Rear/802.11a\_ch 56 SISO Chain 1/Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 12.51 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.98 W/kg

**SAR(1 g) = 0.701 W/kg; SAR(10 g) = 0.154 W/kg**

Maximum value of SAR (measured) = 1.82 W/kg

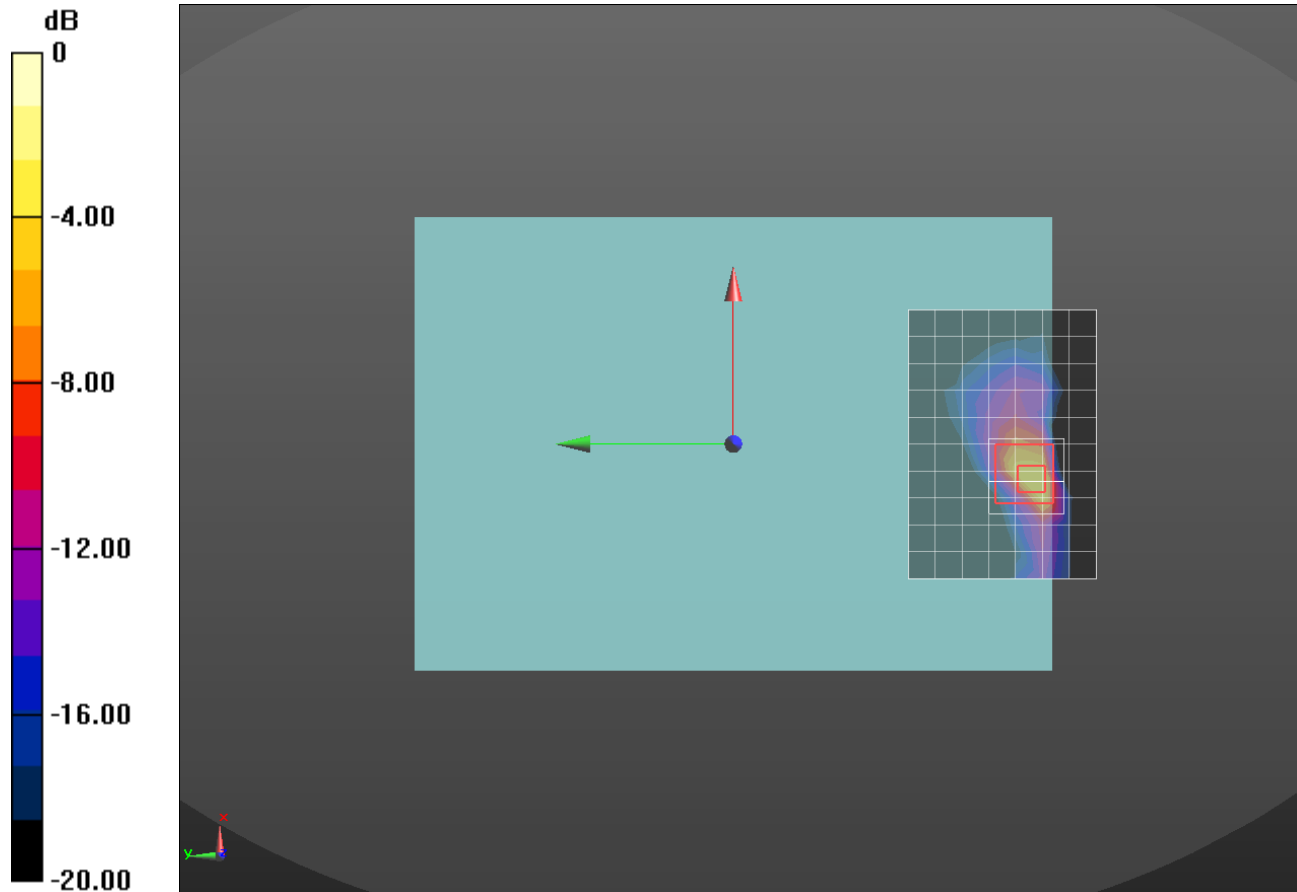

0 dB = 1.82 W/kg = 2.60 dBW/kg

## Wi-Fi\_5.5Ghz

Frequency: 5500 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used:  $f = 5500 \text{ MHz}$ ;  $\sigma = 5.593 \text{ S/m}$ ;  $\epsilon_r = 48.982$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2015-11-11
- Probe: EX3DV4 - SN7313; ConvF(3.71, 3.71, 3.71); Calibrated: 2015-12-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Rear/802.11a\_ch 100 SISO Chain 0/Area Scan (8x12x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$   
 Maximum value of SAR (measured) = 1.69 W/kg


**Rear/802.11a\_ch 100 SISO Chain 0/Zoom Scan (9x9x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 19.27 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 4.76 W/kg

**SAR(1 g) = 0.664 W/kg; SAR(10 g) = 0.143 W/kg**

Maximum value of SAR (measured) = 1.70 W/kg

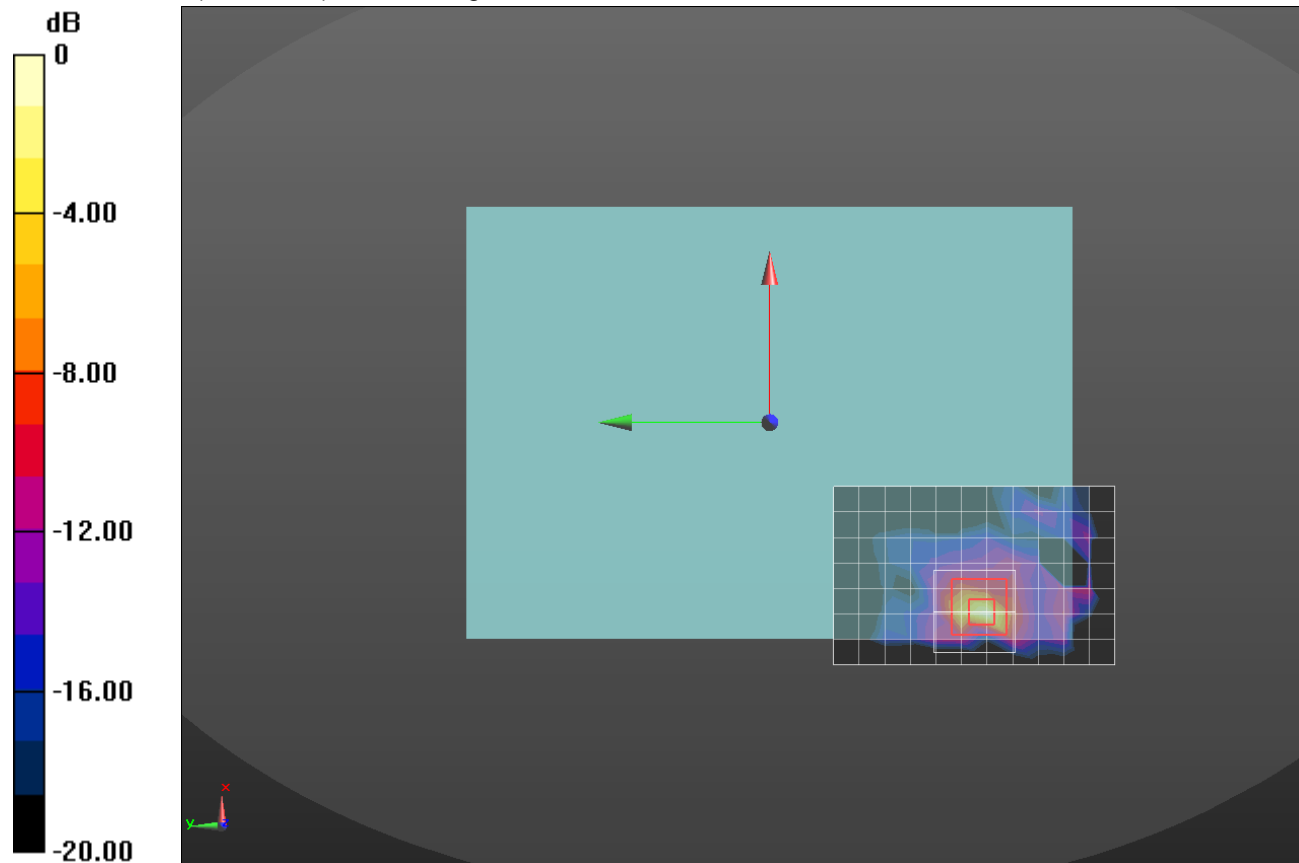

0 dB = 1.70 W/kg = 2.30 dBW/kg

## Wi-Fi\_5.5Ghz


Frequency: 5560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used:  $f = 5560 \text{ MHz}$ ;  $\sigma = 5.676 \text{ S/m}$ ;  $\epsilon_r = 48.887$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2015-11-11
- Probe: EX3DV4 - SN7313; ConvF(3.63, 3.63, 3.63); Calibrated: 2015-12-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Rear/802.11a\_ch 112 SISO Chain 1/Area Scan (11x8x1):** Measurement grid: dx=10mm, dy=10mm  
 Maximum value of SAR (measured) = 1.45 W/kg

**Rear/802.11a\_ch 112 SISO Chain 1/Zoom Scan (9x9x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
 Reference Value = 17.72 V/m; Power Drift = 0.16 dB  
 Peak SAR (extrapolated) = 5.07 W/kg  
**SAR(1 g) = 0.934 W/kg; SAR(10 g) = 0.230 W/kg**  
 Maximum value of SAR (measured) = 2.31 W/kg

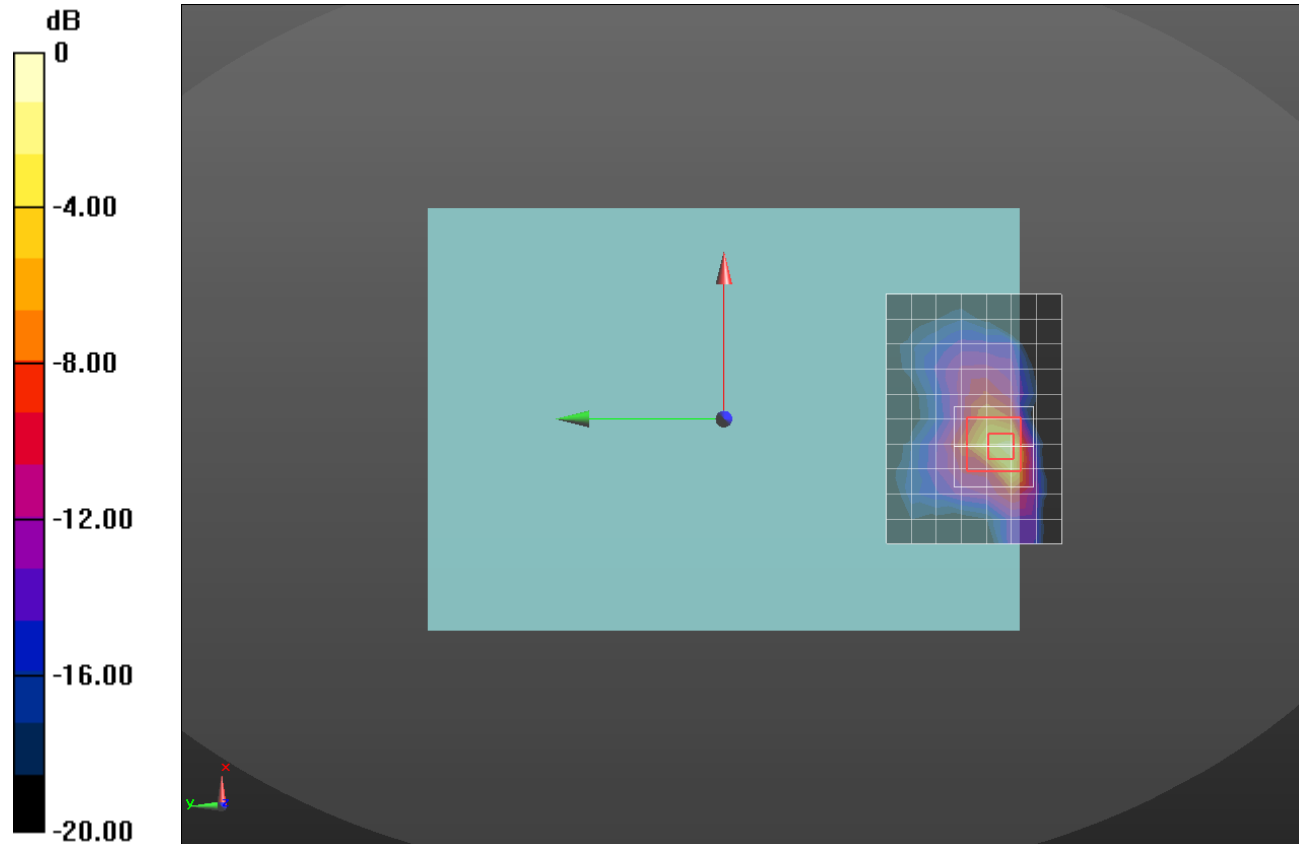

0 dB = 2.31 W/kg = 3.64 dBW/kg

## Wi-Fi\_5.8Ghz

Frequency: 5825 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used:  $f = 5825 \text{ MHz}$ ;  $\sigma = 6.188 \text{ S/m}$ ;  $\epsilon_r = 47.626$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2015-11-11
- Probe: EX3DV4 - SN7313; ConvF(3.85, 3.85, 3.85); Calibrated: 2015-12-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Rear/802.11a\_ch 165 SISO Chain 0/Area Scan (8x12x1):** Measurement grid: dx=10mm, dy=10mm  
 Maximum value of SAR (measured) = 0.427 W/kg


**Rear/802.11a\_ch 165 SISO Chain 0/Zoom Scan (9x9x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 9.223 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.743 W/kg

**SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.045 W/kg**

Maximum value of SAR (measured) = 0.435 W/kg

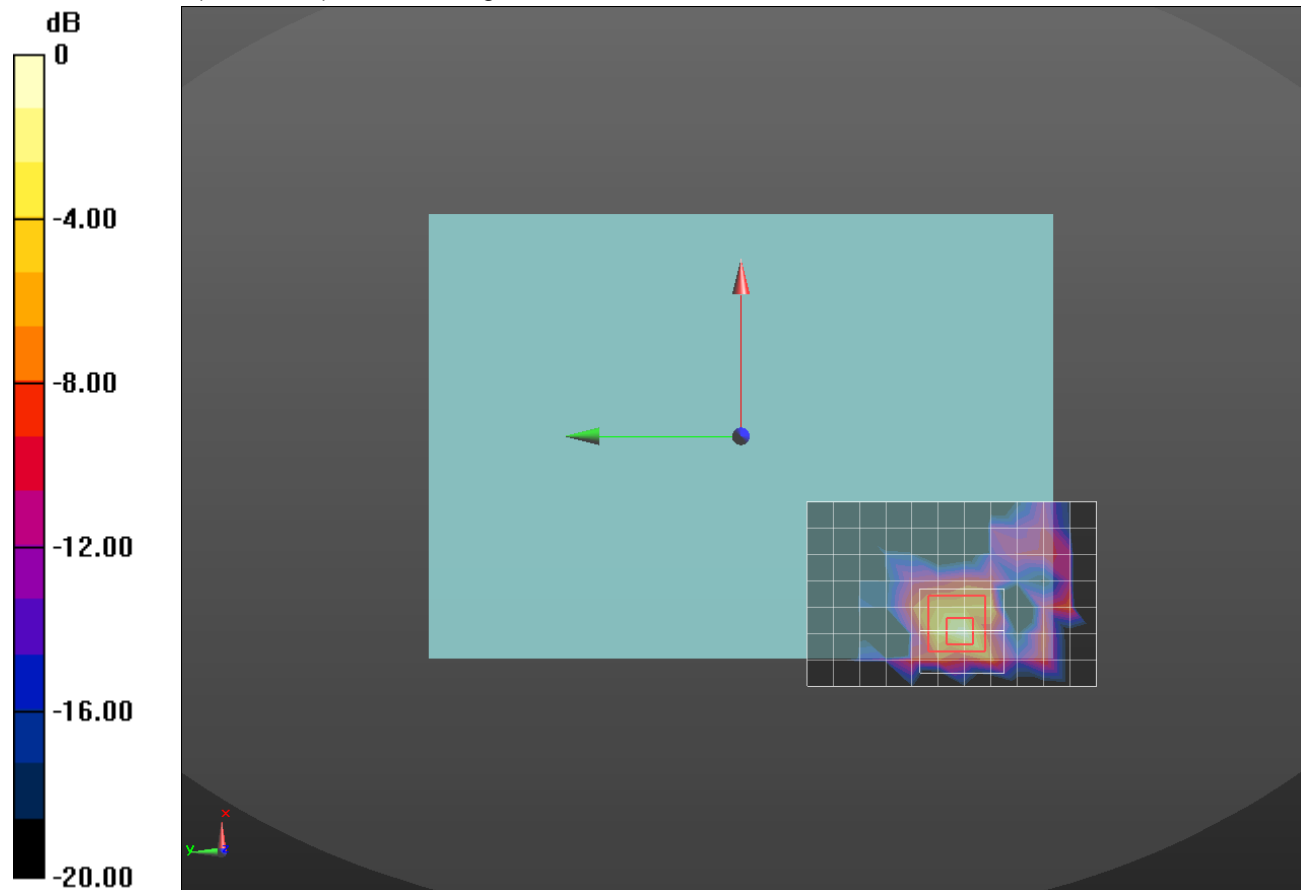

0 dB = 0.435 W/kg = -3.62 dBW/kg

## Wi-Fi\_5.8Ghz

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used:  $f = 5745 \text{ MHz}$ ;  $\sigma = 6.065 \text{ S/m}$ ;  $\epsilon_r = 47.777$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 2015-11-11
- Probe: EX3DV4 - SN7313; ConvF(3.85, 3.85, 3.85); Calibrated: 2015-12-30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Rear/802.11a\_ch 149 SISO Chain 1/Area Scan (11x8x1):** Measurement grid: dx=10mm, dy=10mm  
 Maximum value of SAR (measured) = 0.865 W/kg


**Rear/802.11a\_ch 149 SISO Chain 1/Zoom Scan (9x9x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 13.30 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.39 W/kg

**SAR(1 g) = 0.616 W/kg; SAR(10 g) = 0.159 W/kg**

Maximum value of SAR (measured) = 1.45 W/kg

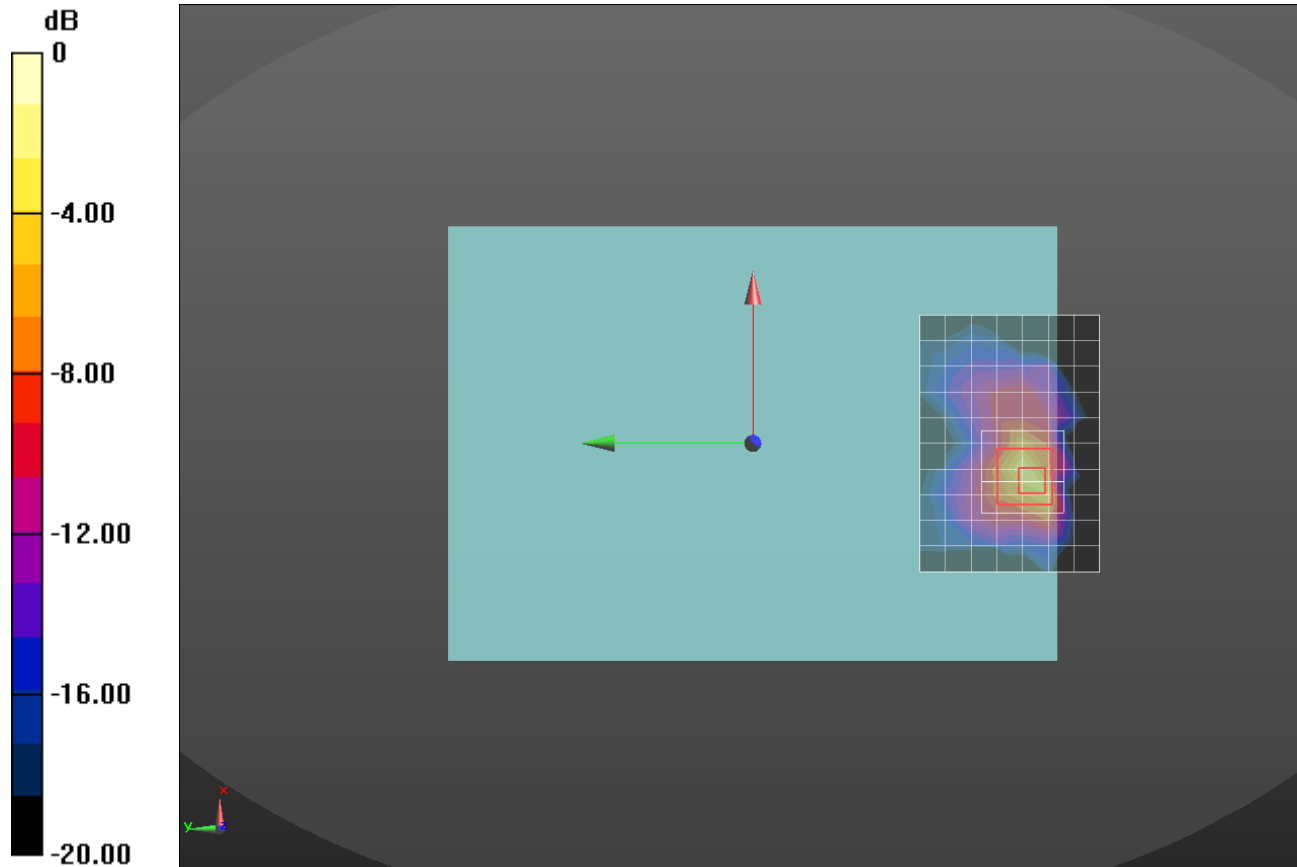

0 dB = 1.45 W/kg = 1.61 dBW/kg

## Bluetooth\_0328

Frequency: 2441 MHz; Duty Cycle: 1:1.29033; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C  
 Medium parameters used (interpolated):  $f = 2441$  MHz;  $\sigma = 1.889$  S/m;  $\epsilon_r = 51.05$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1447; Calibrated: 2015-09-23
- Probe: EX3DV4 - SN7314; ConvF(7.28, 7.28, 7.28); Calibrated: 2015-09-25;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI v6.0; Type: QDOVA003AA; Serial: TP:xxxx

**Rear/Bluetooth GFSK\_ ch 39/Area Scan (8x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.643 W/kg


**Rear/Bluetooth GFSK\_ ch 39/Zoom Scan (8x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.73 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.425 W/kg; SAR(10 g) = 0.171 W/kg**

Maximum value of SAR (measured) = 0.701 W/kg

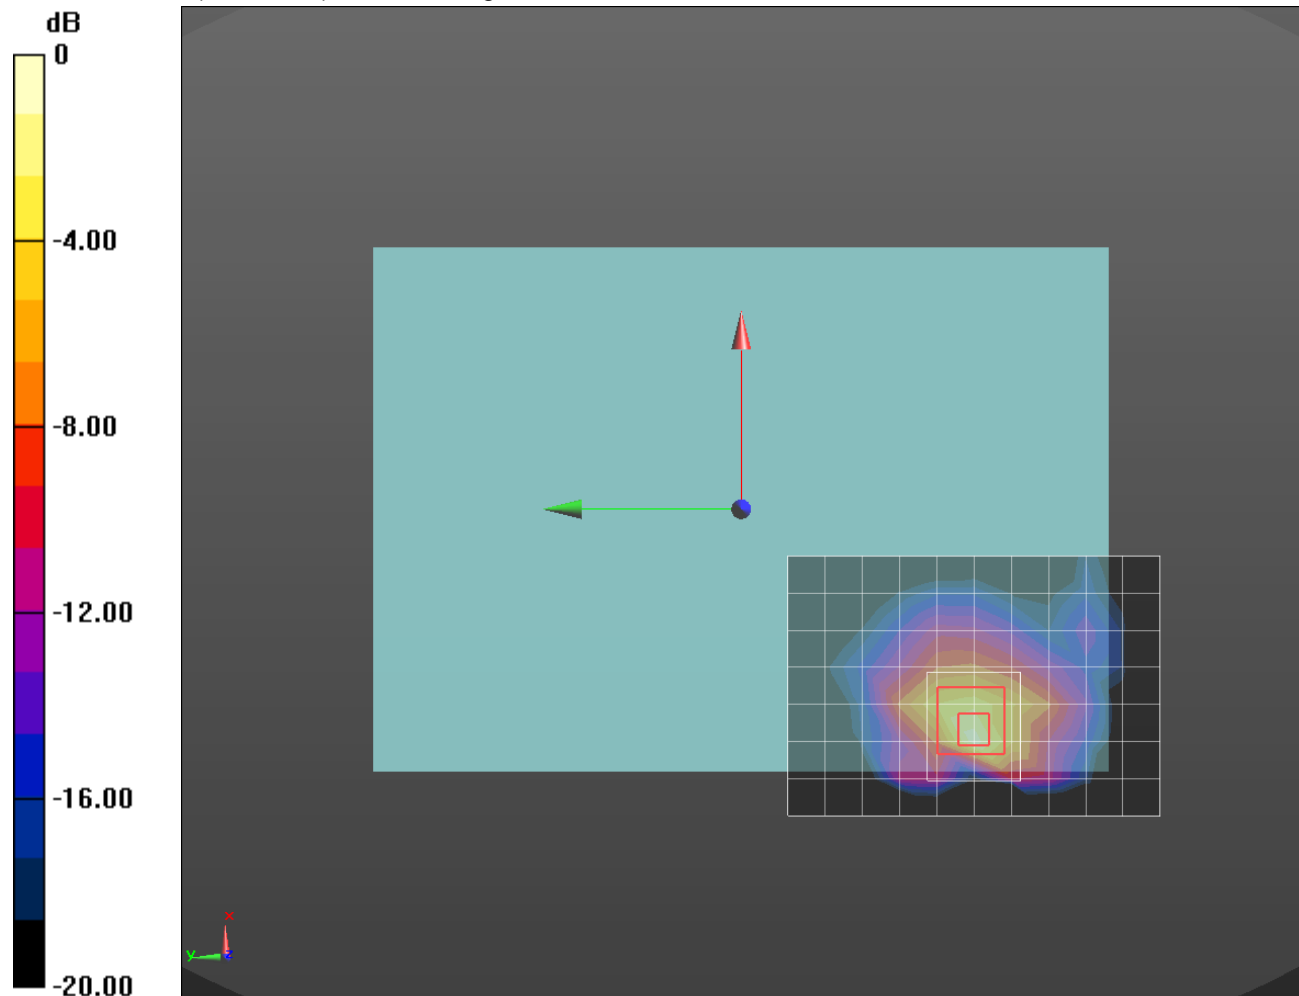

0 dB = 0.701 W/kg = -1.54 dBW/kg