



**FCC CFR47 PART 15 SUBPART C  
INDUSTRY CANADA RSS-210 ISSUE 9**

**ANT+**

**CERTIFICATION TEST REPORT**

**FOR**

**BT/BLE, DTS/UNII a/b/g/n/ac and ANT+ Tablet**

**MODEL NUMBER : SM-T830**

**FCC ID: A3LSMT830**

**IC : 649E-SMT830**

**REPORT NUMBER: 4788494706-E5V1**

**ISSUE DATE: JUN 26, 2018**

*Prepared for*  
**SAMSUNG ELECTRONICS CO., LTD.**  
**129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,**  
**GYEONGGI-DO, 16677, KOREA**

*Prepared by*  
**UL Korea, Ltd.**  
**26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea**

**Suwon Test Site: UL Korea, Ltd. Suwon Laboratory**  
**218 Maeyeong-ro, Yeongtong-gu,**  
**Suwon-si, Gyeonggi-do, 16675, Korea**  
**TEL: (031) 337-9902**  
**FAX: (031) 213-5433**



Testing  
Laboratory

**TL-637**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	06/26/18	Initial issue	Hoonpyo Lee

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
1.1. INTRODUCTION OF TEST DATA REUSE.....	5
1.2. DIFFERENCE.....	5
1.3. SPOT CHECK VERIFICATION DATA .....	5
1.4. REFERENCE DETAIL .....	6
<b>2. TEST METHODOLOGY .....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>7</b>
4.1. MEASURING INSTRUMENT CALIBRATION .....	7
4.2. SAMPLE CALCULATION .....	7
4.3. MEASUREMENT UNCERTAINTY.....	7
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1. DESCRIPTION OF EUT .....	8
5.2. MAXIMUM E-FIELD STRENGTH .....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS .....	8
5.4. WORST-CASE CONFIGURATION AND MODE.....	8
5.5. DESCRIPTION OF TEST SETUP.....	9
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>11</b>
<b>7. LIMITS AND RESULTS.....</b>	<b>12</b>
7.1. 99% BANDWIDTH.....	12
7.2. TRANSMITTER RADIATED EMISSIONS.....	14
7.2.1. DUTY CYCLE .....	17
7.2.2. FUNDAMENTAL FIELD STRENGTH LEVEL.....	18
7.2.3. TRANSMITTER BAND EDGES .....	24
7.2.4. HARMONICS AND SPURIOUS EMISSIONS .....	28
7.2.5. SPURIOUS BELOW 1 GHz .....	34
<b>8. AC POWER LINE CONDUCTED EMISSIONS.....</b>	<b>38</b>
<b>9. SETUP PHOTOS.....</b>	<b>43</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.  
**EUT DESCRIPTION:** BT/BLE, DTS/UNII a/b/g/n/ac and ANT+ Tablet  
**MODEL NUMBER:** SM-T830  
**SERIAL NUMBER:** R32K10045KW (RADIATED, Original);  
R32K10044PB (CONDUCTED, Original)  
R32K300G7VL (RADIATED, Spot check)  
**DATE TESTED:** MAY 18, 2018 - JUN 04, 2018 (Original)  
JUN 21, 2018 – JUN 26, 2018 (Spot check)

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 9	Pass
INDUSTRY CANADA RSS-GEN Issue 5	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:



SungGil Park  
Suwon Lab Engineer  
UL Korea, Ltd.

Tested By:



Hoonpyo Lee  
Suwon Lab Engineer  
UL Korea, Ltd.

### 1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMT835 DXX ANT+(FCC CFR 47 Part 15C). And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

### 1.2. DIFFERENCE

The FCC ID: A3LSMT830(IC : 649E-SMT830, Model number : SM-T830), shares the same enclosure and circuit board as FCC ID: A3LSMT835 (Model number : SM-T835). The ANT+ antennas and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMT835 (Model number : SM-T835) remains representative of FCC ID: A3LSMT830(IC : 649E-SMT830, Model number : SM-T830). The test data of FCC ID: A3LSMT835 (Model number : SM-T835) being submitted for this application to cover ANT+ features.

Model number, SM-T835, is not certified for ISED certification.

### 1.3. SPOT CHECK VERIFICATION DATA

(Worst case of the fundamental level, radiated spurious and band edge emissions)

Mode	Test Item	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
				SM-T835 Results	SM-T830 Results		
				FCC ID : A3LSMT835	FCC ID : A3LSMT830 IC : 649E-SMT830		
ANT+	Fundamental	2402 MHz	114 dBuV/m	87.49 dBuV/m	86.53 dBuV/m	-0.96 dB	
	Band Edge	2480 MHz	74 dBuV/m	54.44 dBuV/m	54.18 dBuV/m	-0.26 dB	
	RSE	2402 MHz	74 dBuV/m	46.13 dBuV/m	37.30 dBuV/m	-8.83 dB	

Comparison of two models, upper deviation is within 3dB range and all test results are under FCC Technical Limits.

### 1.4. REFERENCE DETAIL

Reference application that contains the reused reference data.

Equipment Class	Reference FCC ID	Type Grant/Permissive Change	Reference Application	Folder Test/RF Exposure	Report Title / Section
DTS	A3LSMT835	Grant	4788429415-E1V2	Test	FCC Report DTS WLAN / Test results of Ch.1~Ch.11
			4788429415-E2V1	Test	FCC Report BLE All sections
DXX	A3LSMT835	Grant	4788429415-E5V1	Test	FCC Report ANT+ / All sections
NII	A3LSMT835	Grant	4788429415-E4V1	Test	FCC Report UNII WLAN / All sections

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. IC RSS-210 Issue 9.
4. IC RSS-GEN Issue 5
5. ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input type="checkbox"/>	Chamber 2
<input type="checkbox"/>	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	3.86 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a BT/BLE, DTS/UNII a/b/g/n/ac and ANT+ Tablet.  
This test report addresses the ANT+ operational mode.

### 5.2. MAXIMUM E-FIELD STRENGTH

The ANT+ mode has maximum output fundamental field strength as follows:

Frequency Range [MHz]	Mode	Peak E-field Strength [dBuV/m]	Avg E-field Strength [dBuV/m]	Distance [m]
2402 - 2480	ANT +	87.49	54.98	3.00

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal antenna, with a maximum gain of -1.84 dBi

### 5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

Note : All radiated and power line conducted tests were performed connected with earphone and charger for evaluation of worst case mode.



## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA20EWE	R37KDCZ1855DK3	N/A
Data Cable	SAMSUNG	EP-DN930CWE	N/A	N/A
Earphone	SAMSUNG	EO-EG920BW	N/A	N/A

### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.1m	N/A
2	Audio	2	Mini-Jack	Unshielded	1.2m	N/A


### TEST SETUP

The EUT is set to continuously transmit in ANT + test mode.  
 Test software in hidden menu exercised the EUT to enable ANT+ mode.


### NOTE

Additional tests under 1 GHz were performed with the keyboard attached to check on all port terminated conditions. Keyboard is not an in-box item.

**SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)**

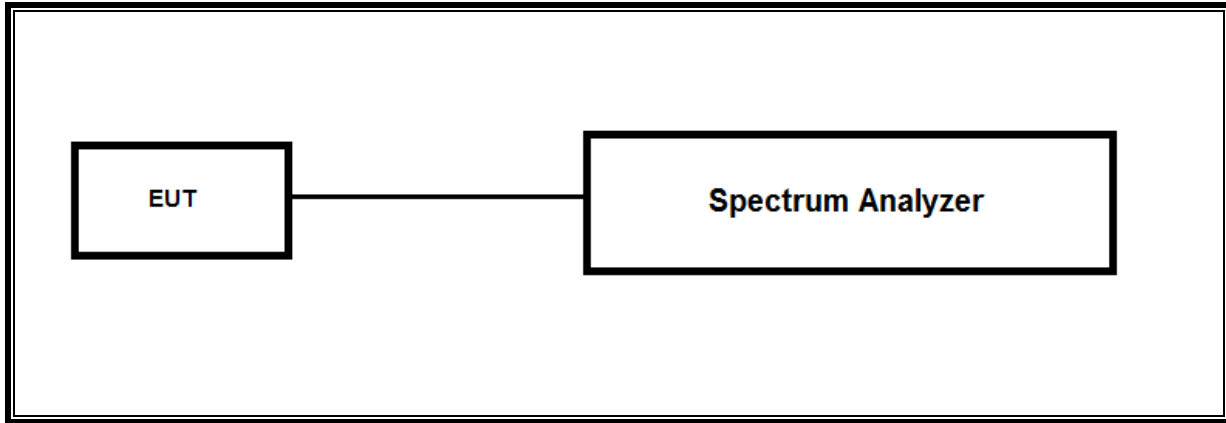

**SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)**

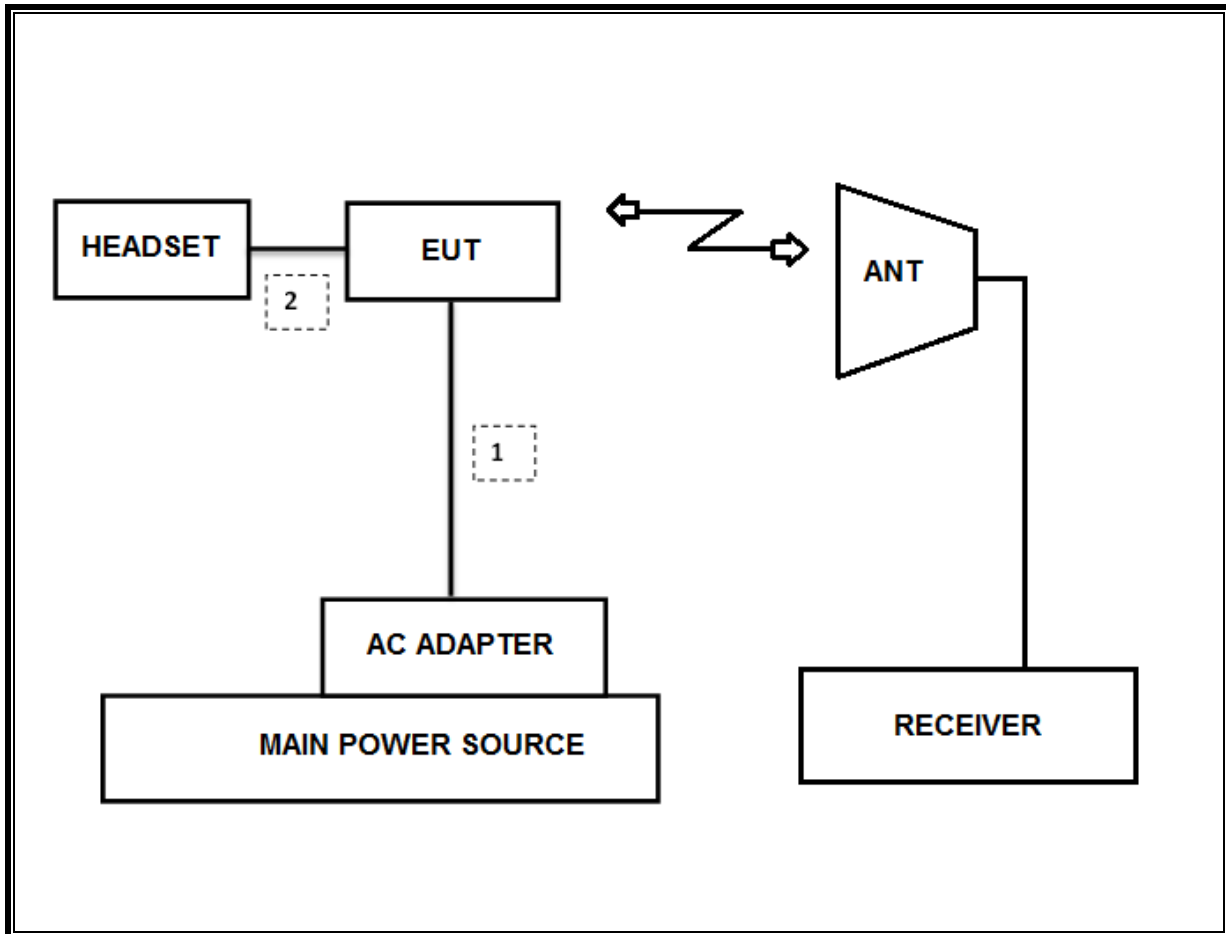

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-31-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	09-14-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-31-19
Antenna, Horn, 18 GHz	ETS	3115	00167211	10-14-18
Antenna, Horn, 18 GHz	ETS	3115	00161451	03-10-19
Antenna, Horn, 18 GHz	ETS	3117	00168724	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00168717	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00205959	11-29-18
Antenna, Horn, 40 GHz	ETS	3116C	00166155	12-04-19
Antenna, Horn, 40 GHz	ETS	3116C	00168645	12-04-19
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	11-13-19
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-09-18
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-07-18
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-10-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-08-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-08-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-11-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-08-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-08-18
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-08-18
Attenuator	PASTERNAK	PE7087-10	A001	08-08-18
Attenuator	PASTERNAK	PE7087-10	A008	08-08-18
Attenuator	PASTERNAK	PE7087-10	2	08-10-18
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-08-18
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-08-18
EMI Test Receive, 44 GHz	R&S	ESW44	101590	08-09-18
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-07-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-08-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-08-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-11-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-11-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-11-18
LISN	R&S	ENV-216	101837	08-09-18
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

## 7. LIMITS AND RESULTS

### 7.1. 99% BANDWIDTH

#### LIMITS

None; for reporting purposes only.

#### TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

#### RESULTS


Channel	Frequency [MHz]	99% Bandwidth [kHz]	20 dB Bandwidth [kHz]
Low	2402	762.78	599.40
Mid	2441	790.59	608.40
High	2480	755.44	578.80
Worst		790.59	608.40

**99% BANDWIDTH PLOTS**


**LOW CHANNEL**

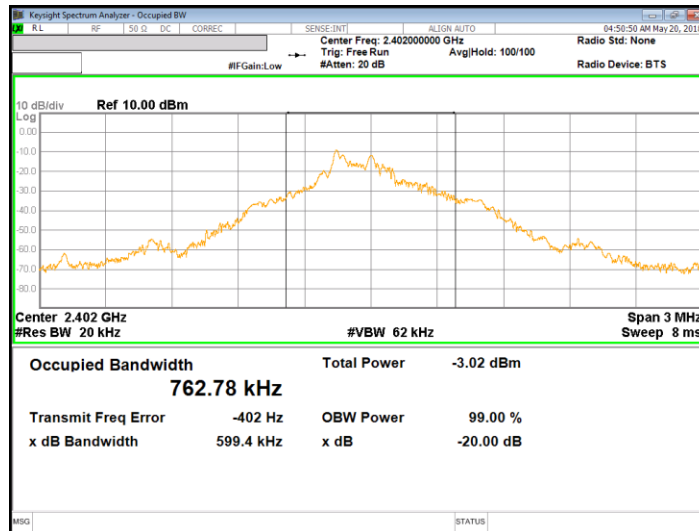

**MID CHANNEL**

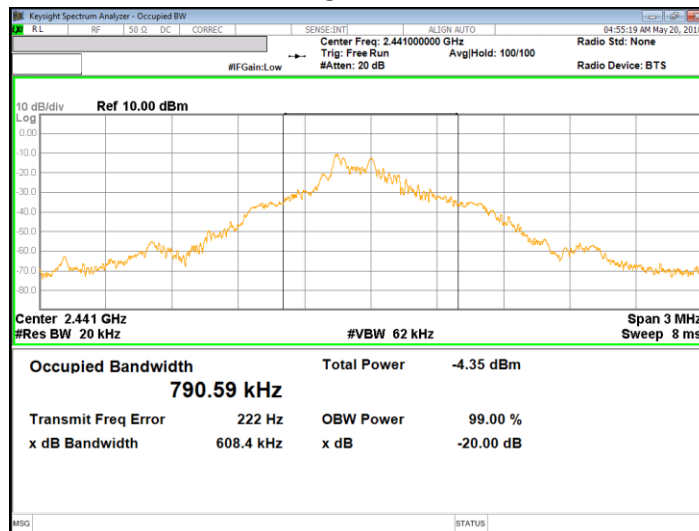

**HIGH CHANNEL**

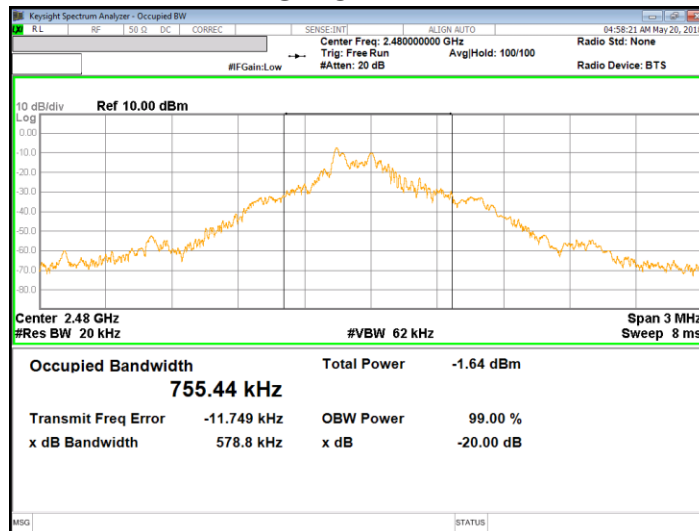

## 7.2. TRANSMITTER RADIATED EMISSIONS

### TEST PROCEDURE

ANSI C63.10: 2013

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements.

Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

**LIMIT**

FCC §15.249  
IC RSS-210, B.10  
IC RSS-GEN Clause 8.9 (Transmitter)  
IC RSS-GEN Clause 7 (Receiver)

Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz, and 24.0–24.25 GHz.

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

<b>Fundamental frequency</b>	<b>Field strength of fundamental (millivolts/meter)</b>	<b>Field strength of harmonics (microvolts/meter)</b>
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

(e) As shown in Sec. 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.


Note : Emission was pre-scanned from 9KHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).  
 Per FCC part 15.31(o), test results were not reported.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site.  
 Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.




**RESULTS**

**7.2.1. DUTY CYCLE**

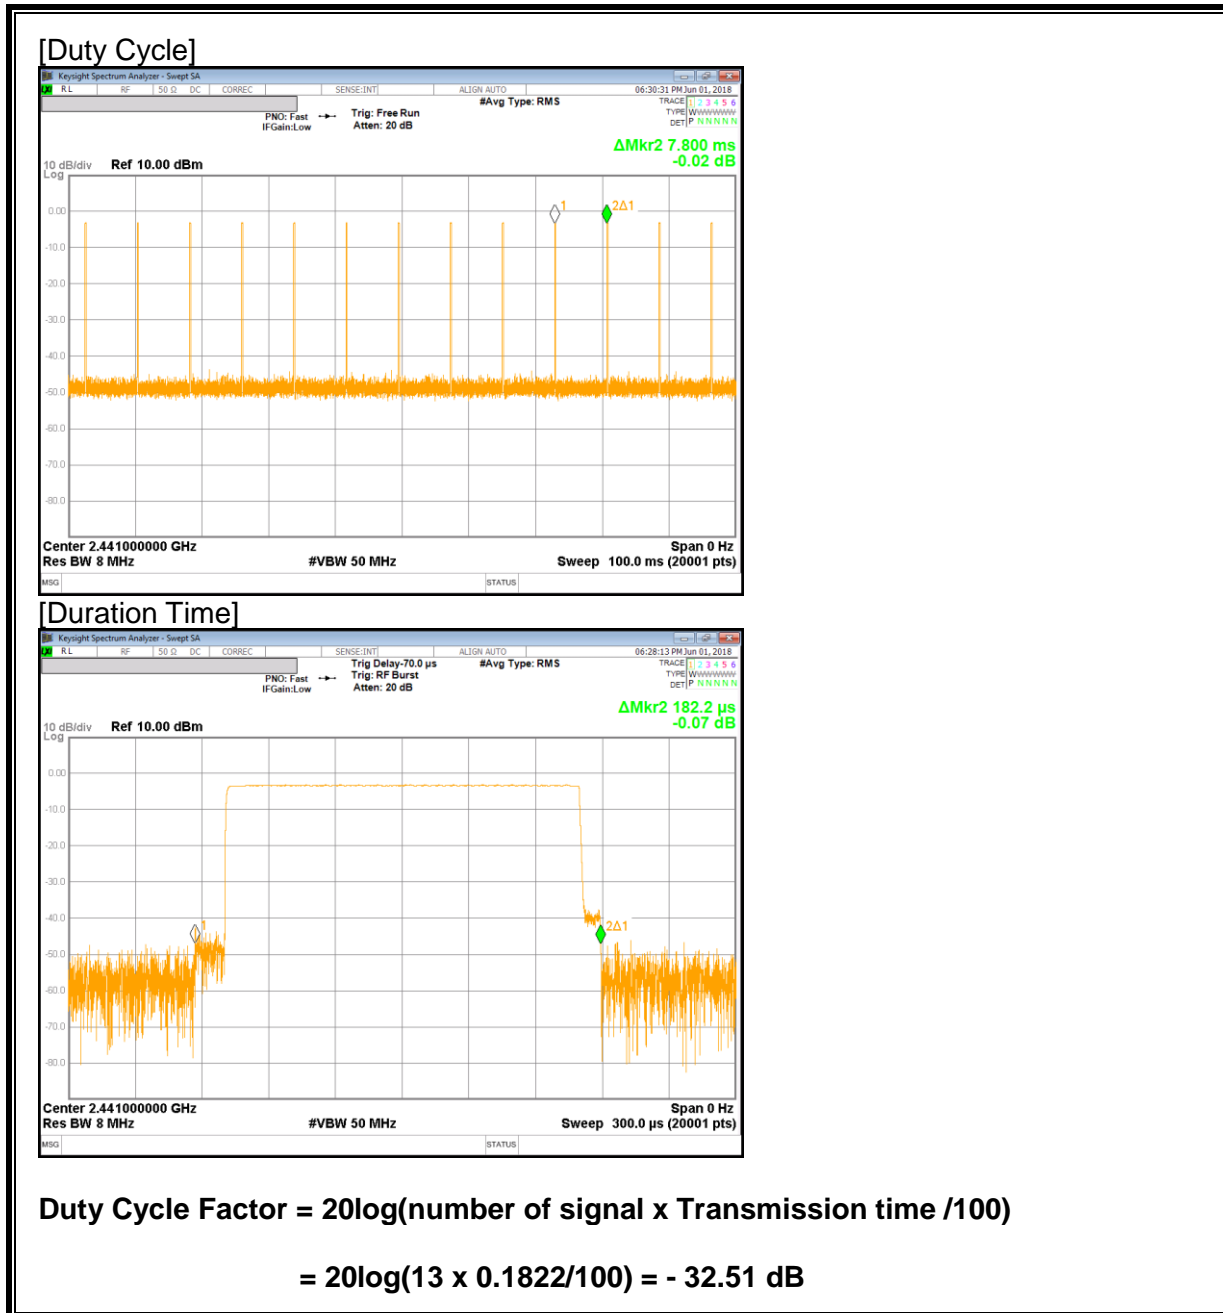

## 7.2.2. FUNDAMENTAL FIELD STRENGTH LEVEL

### LOW CHANNEL, HORIZONTAL

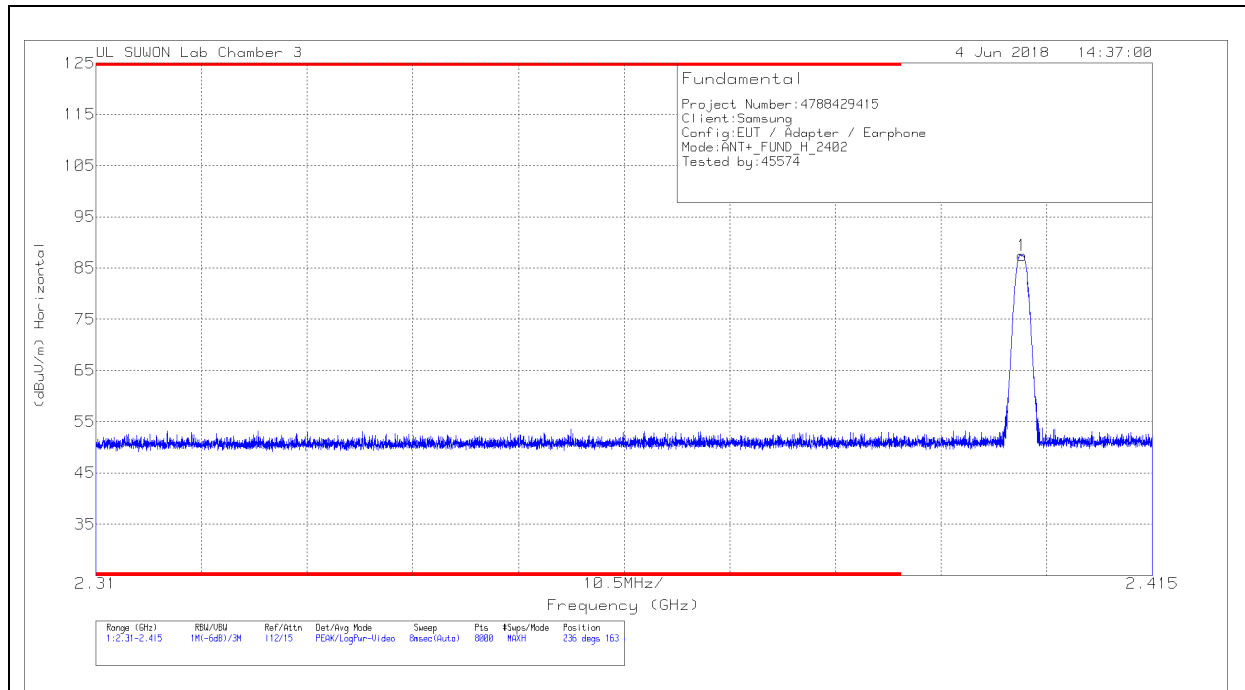

#### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Azimuth (Degs)	Height (cm)	Polarity
1	2.402	78.89	Pk	31.8	-23.2	87.49	236	163	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

Peak reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
87.49	114	26.51


\*\* For marker 1 used the following method to do averaging:

DCCF = -32.51

Corrected AV reading = Peak Reading + DCCF

= 87.49 + -32.51 = 54.98 dBuV/m AVG Limit : 94 dBuV/m, Margin 39.02 dB

**LOW CHANNEL, VERTICAL**

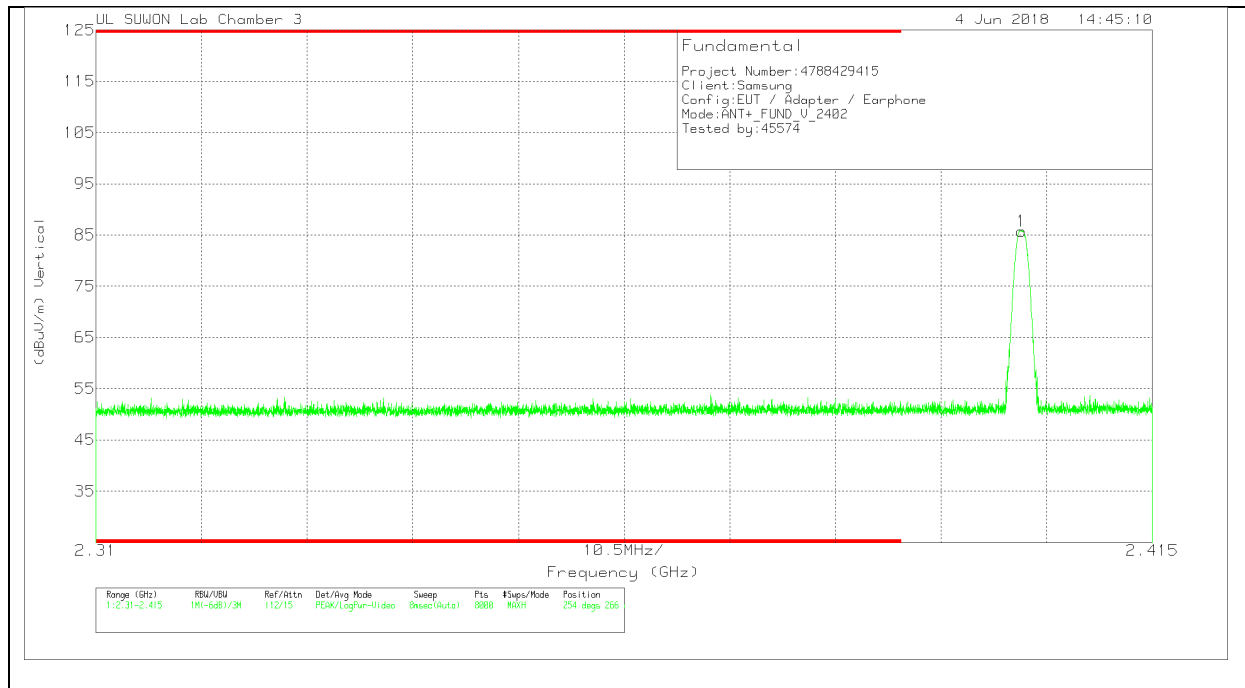

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Azimuth (Degs)	Height (cm)	Polarity
1	2.402	77.18	Pk	31.8	-23.2	85.78	254	266	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector

Peak reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
85.78	114	28.22


\*\* For marker 1 used the following method to do averaging:

DCCF = -32.51

Corrected AV reading = Peak Reading + DCCF

= 85.78 + -32.51 = 53.27 dBuV/m AVG Limit : 94 dBuV/m, Margin 40.73 dB]

**MID CHANNEL, HORIZONTAL**

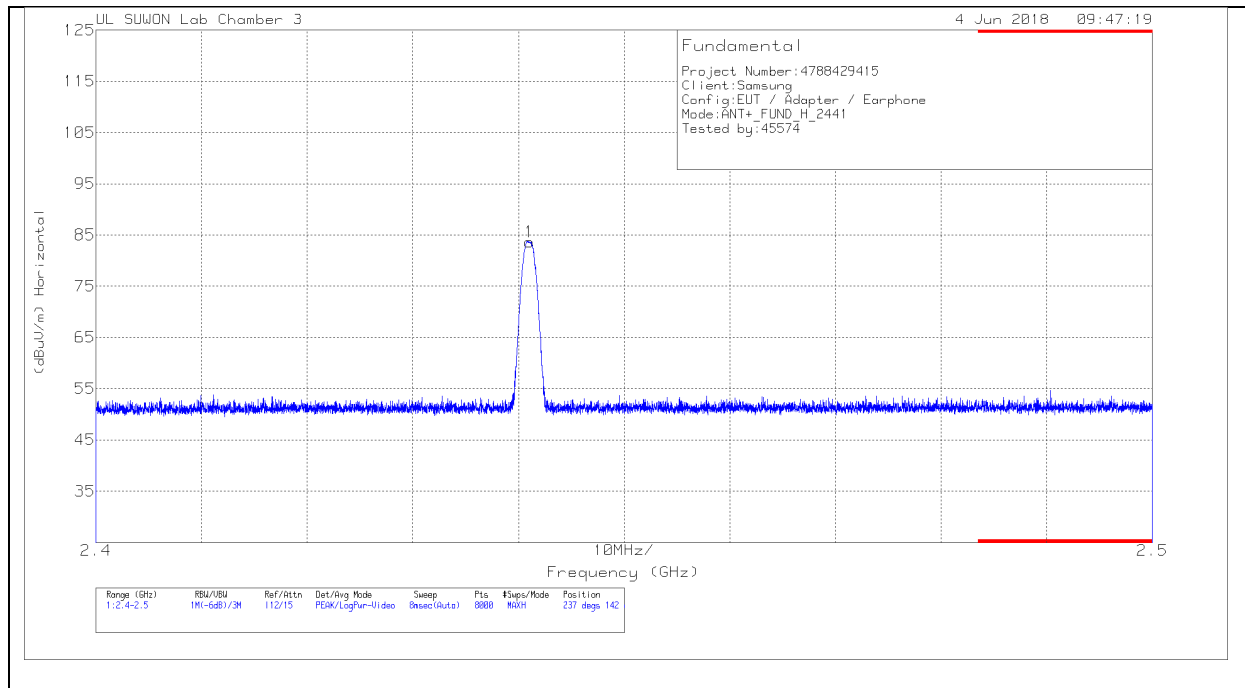

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Azimuth (Degs)	Height (cm)	Polarity
1	2.441	74.9	Pk	31.9	-23.2	83.6	237	142	H

**Pk - Peak detector**

* Peak reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
83.6	114	30.4


\*\* For marker 1 used the following method to do averaging:

DCCF = -32.51

Corrected AV reading = Peak Reading + DCCF

= 83.6 + -32.51 = 51.09 dBuV/m AVG Limit : 94 dBuV/m, Margin 42.91 dB]

**MID CHANNEL, VERTICAL**

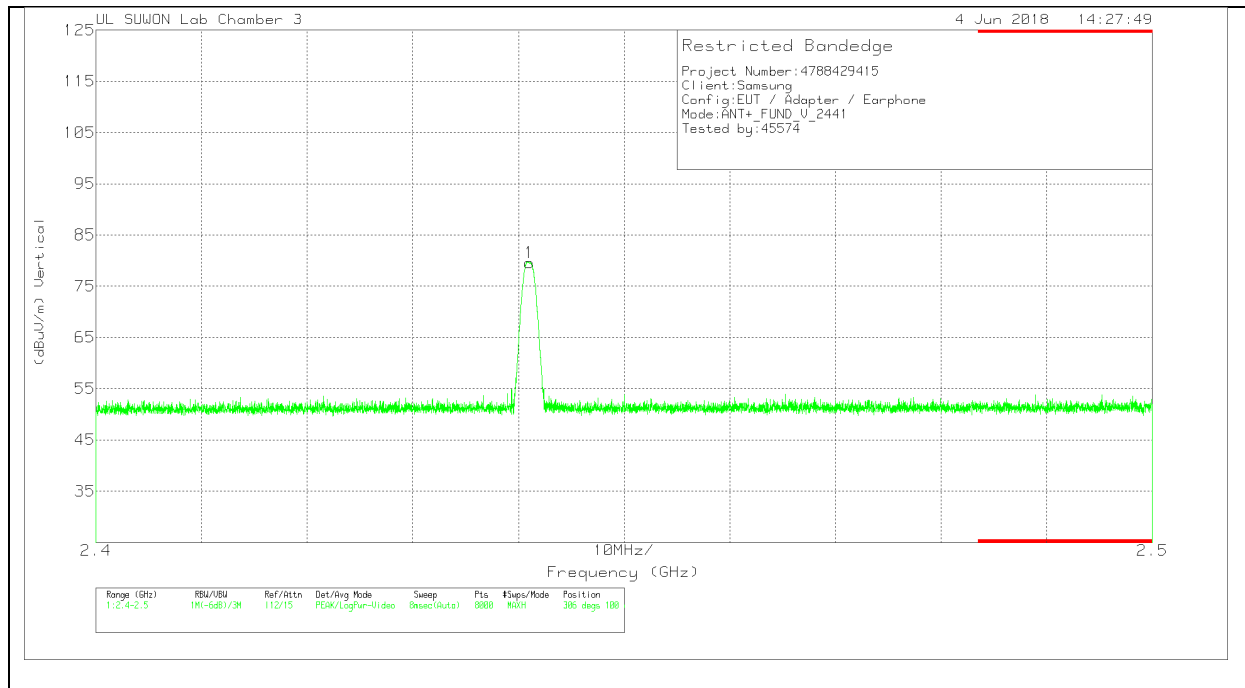

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Azimuth (Degs)	Height (cm)	Polarity
1	2.441	70.91	Pk	31.9	-23.2	79.61	306	100	V

**Pk - Peak detector**

Peak reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
79.61	114	34.39


\*\* For marker 1 used the following method to do averaging:

DCCF = -32.51

Corrected AV reading = Peak Reading + DCCF

= 79.61 + -32.51 = 47.1 dBuV/m, AVG Limit : 94 dBuV/m, Margin 46.9 dB]

**HIGH CHANNEL, HORIZONTAL**

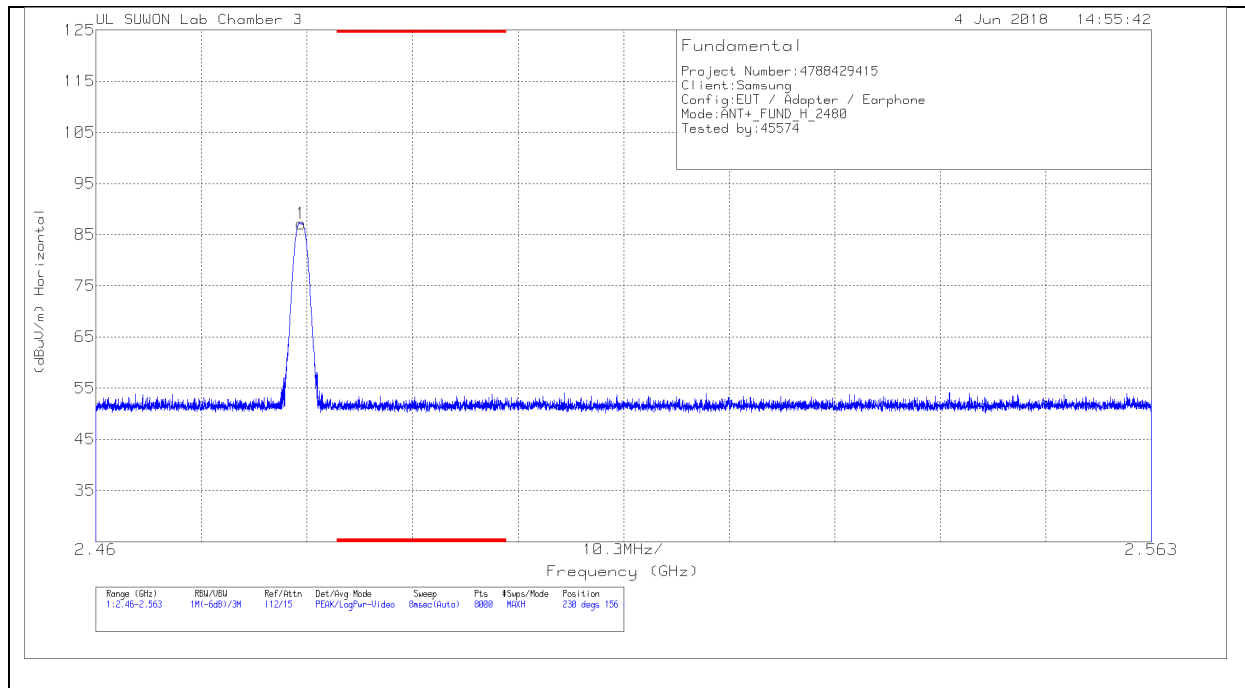

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Azimuth (Degs)	Height (cm)	Polarity
1	2.48	78.25	Pk	32	-23.1	87.15	230	156	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector

Peak reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
87.15	114	26.85


\*\* For marker 1 used the following method to do averaging:

DCCF = -32.51

Corrected AV reading = Peak Reading + DCCF

= 87.15 + -32.51 = 54.64 dBuV/m AVG Limit : 94 dBuV/m, Margin 39.36 dB

**HIGH CHANNEL, VERTICAL**

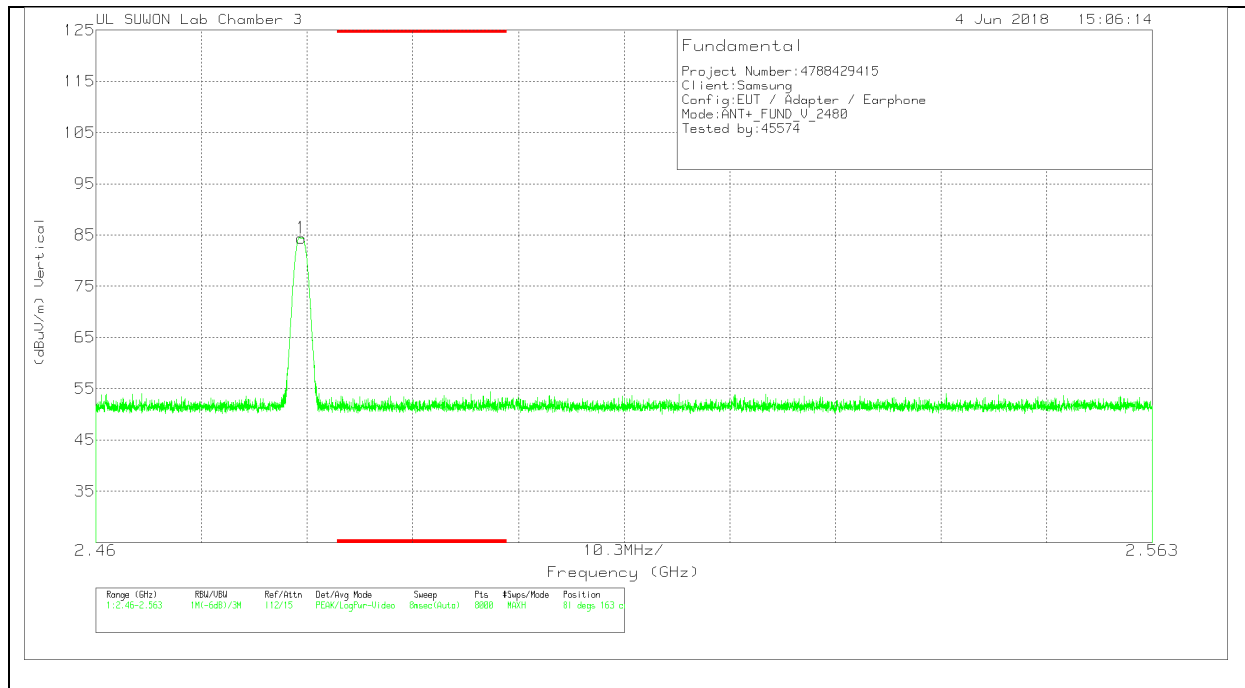

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Azimuth (Degs)	Height (cm)	Polarity
1	2.48	75.54	Pk	32	-23.1	84.44	81	163	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector

Peak reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)
84.44	114	29.56

\*\* For marker 1 used the following method to do averaging:


DCCF = -32.51

Corrected AV reading = Peak Reading + DCCF

= 84.44 + -32.51 = 51.93 dBuV/m AVG Limit : 94 dBuV/m, Margin 42.07 dB]

### 7.2.3. TRANSMITTER BAND EDGES

#### BANDEDGE (LOW CHANNEL, HORIZONTAL)

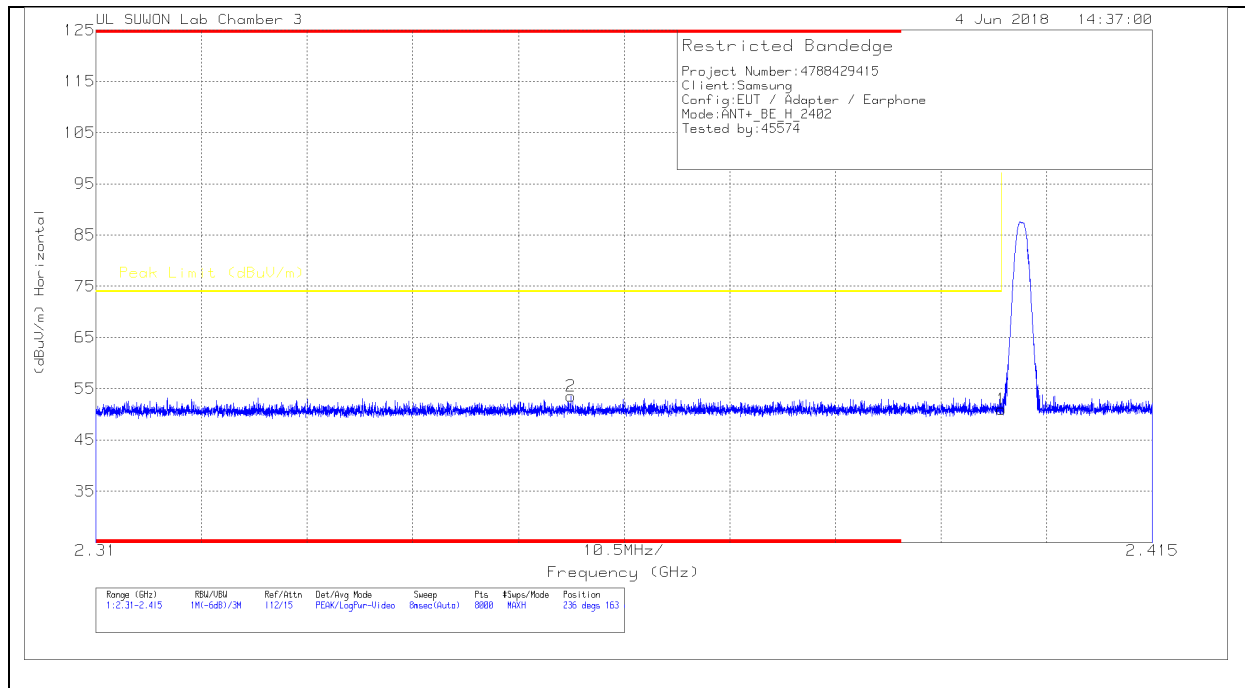

#### HORIZONTAL DATA

##### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4	42.43	Pk	31.8	-23.2	51.03	74	-22.97	236	163	H
2	* 2.357	45.17	Pk	31.7	-23.3	53.57	74	-20.43	236	163	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

\* For marke 1 used the following method to do averaging:

DCCF = -32.51 / Peak Reading = 51.03 dBuV/m

Corrected AV reading = Peak Reading + DCCF

= 51.03 + -32.51 = 18.52 dBuV/m AVG Limit : 54 dBuV/m, Margin 35.48 dB]

\* For marke 2 used the following method to do averaging:


DCCF = -32.51 / Peak Reading = 53.57 dBuV/m

Corrected AV reading = Peak Reading + DCCF

= 53.57 + -32.51 = 21.06 dBuV/m AVG Limit : 54 dBuV/m, Margin 32.94 dB]



**VERTICAL PEAK AND AVERAGE PLOT**

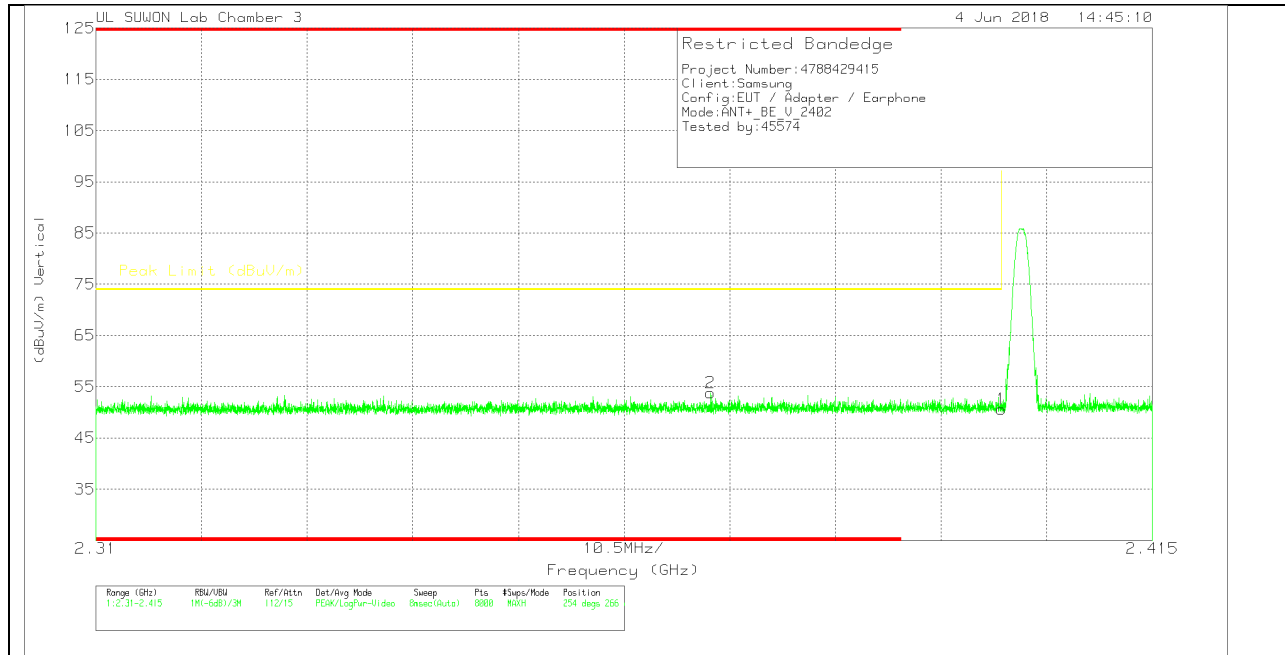

**VERTICAL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4	42.02	Pk	31.8	-23.2	50.62	74	-23.38	254	266	V
2	* 2.371	45.41	Pk	31.7	-23.3	53.81	74	-20.19	254	266	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector

\* For marke 1 used the following method to do averaging:

DCCF = -32.51 / Peak Reading = 50.62 dBuV/m

Corrected AV reading = Peak Reading + DCCF

= 50.62 + -32.51 = 18.11 dBuV/m AVG Limit : 54 dBuV/m, Margin 35.89 dBJ

\* For marke 2 used the following method to do averaging:


DCCF = -32.51 / Peak Reading = 53.81 dBuV/m

Corrected AV reading = Peak Reading + DCCF

= 53.81 + -32.51 = 21.3 dBuV/m AVG Limit : 54 dBuV/m, Margin 32.7 dBJ

### AUTHORIZED BANDEDGE (HIGH CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

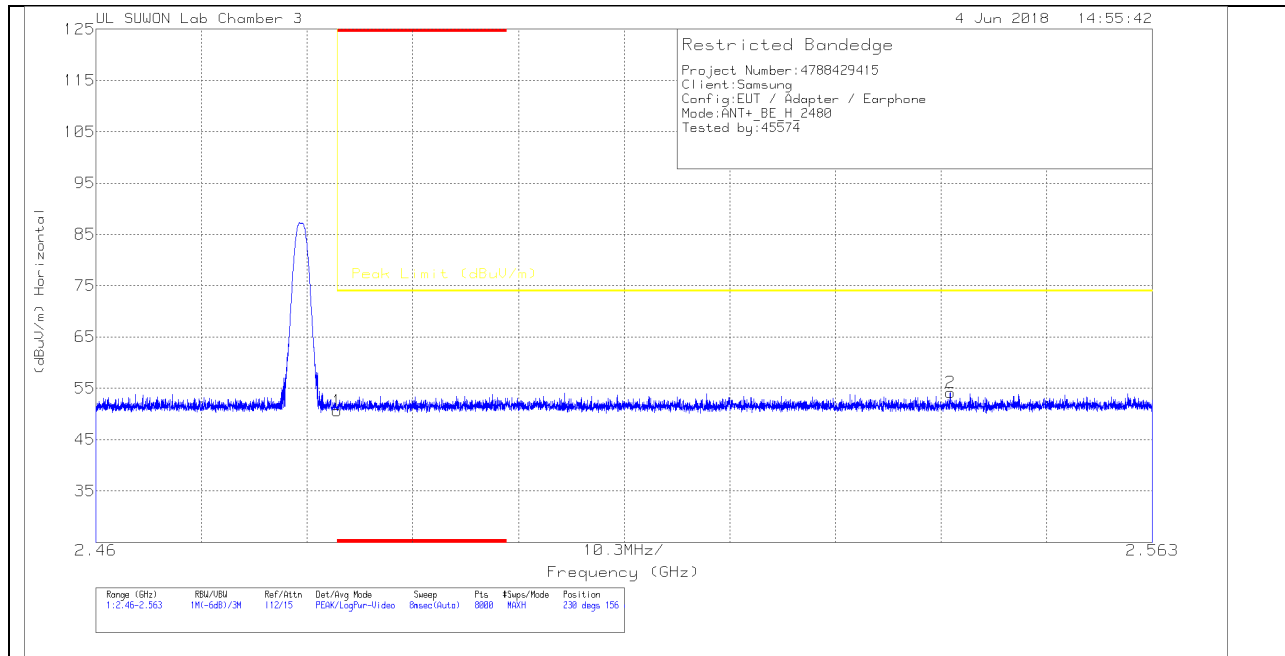

#### HORIZONTAL DATA

##### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.53	Pk	32.1	-23	50.63	74	-23.37	230	156	H
2	2.543	45.04	Pk	32.1	-23	54.14	74	-19.86	230	156	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector


\* For marke 1 used the following method to do averaging:

$$\begin{aligned}
 \text{DCCF} &= -32.51 \quad / \quad \text{Peak Reading} = \underline{50.63} \text{ dBuV/m} \\
 \text{Corrected AV reading} &= \text{Peak Reading} + \text{DCCF} \\
 &= 50.63 + -32.51 = \underline{18.12} \text{ dBuV/m} \quad \text{AVG Limit : 54 dBuV/m, Margin } \underline{35.88} \text{ dB}
 \end{aligned}$$

\* For marke 2 used the following method to do averaging:

$$\begin{aligned}
 \text{DCCF} &= -32.51 \quad / \quad \text{Peak Reading} = \underline{54.14} \text{ dBuV/m} \\
 \text{Corrected AV reading} &= \text{Peak Reading} + \text{DCCF} \\
 &= 54.14 + -32.51 = \underline{21.63} \text{ dBuV/m} \quad \text{AVG Limit : 54 dBuV/m, Margin } \underline{32.37} \text{ dB}
 \end{aligned}$$

**VERTICAL PEAK AND AVERAGE PLOT**

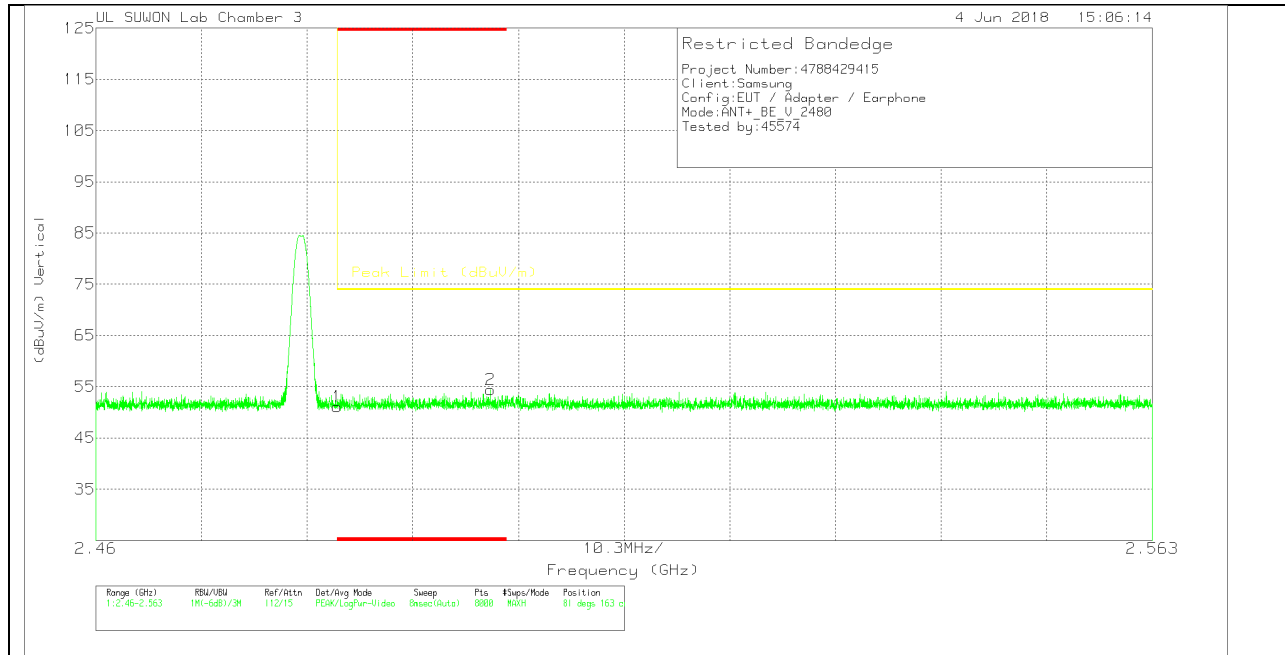

**VERTICAL DATA**

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.97	Pk	32.1	-23	51.07	74	-22.93	81	163	V
2	* 2.498	45.34	Pk	32.1	-23	54.44	74	-19.56	81	163	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector

\* For marke 1 used the following method to do averaging:  
 $DCCF = -32.51$  / Peak Reading = 51.07 dBuV/m  
 Corrected AV reading = Peak Reading + DCCF  
 = 51.07 + -32.51 = 18.56 dBuV/m AVG Limit : 54 dBuV/m, Margin 35.44 dB]


\* For marke 2 used the following method to do averaging:  
 $DCCF = -32.51$  / Peak Reading = 54.44 dBuV/m  
 Corrected AV reading = Peak Reading + DCCF  
 = 54.44 + -32.51 = 21.93 dBuV/m AVG Limit : 54 dBuV/m, Margin 32.07 dB]

### 7.2.4. HARMONICS AND SPURIOUS EMISSIONS

#### LOW CHANNEL HORIZONTAL

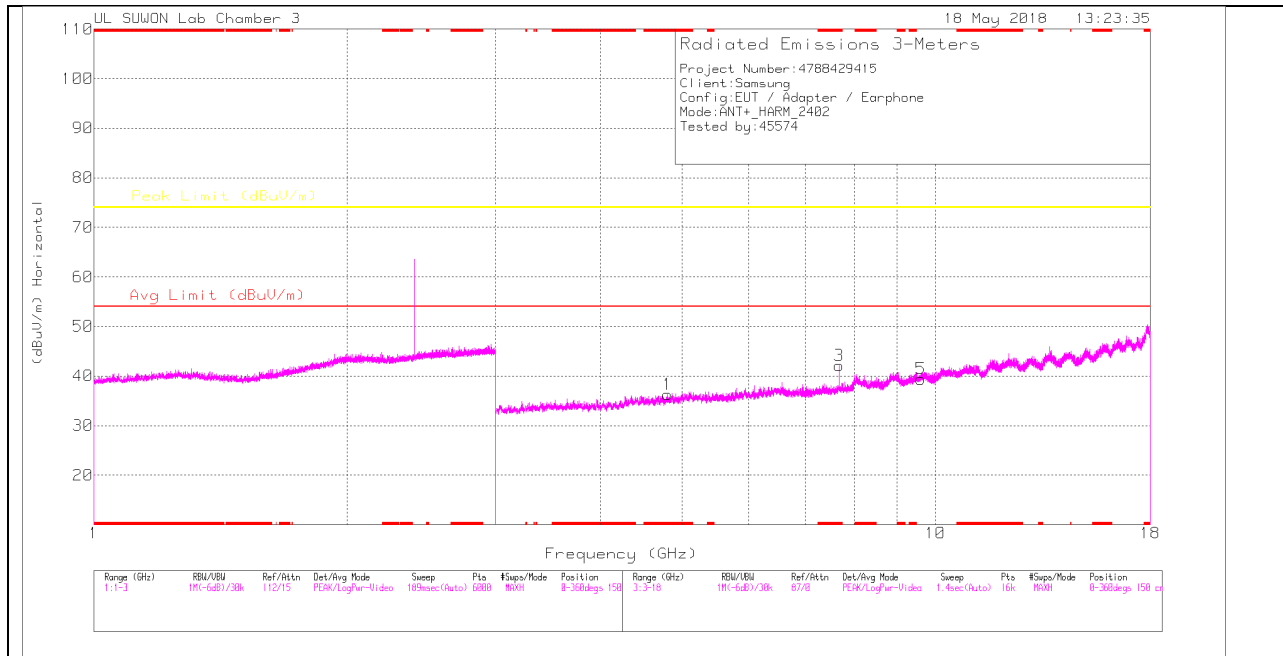

#### LOW CHANNEL VERTICAL

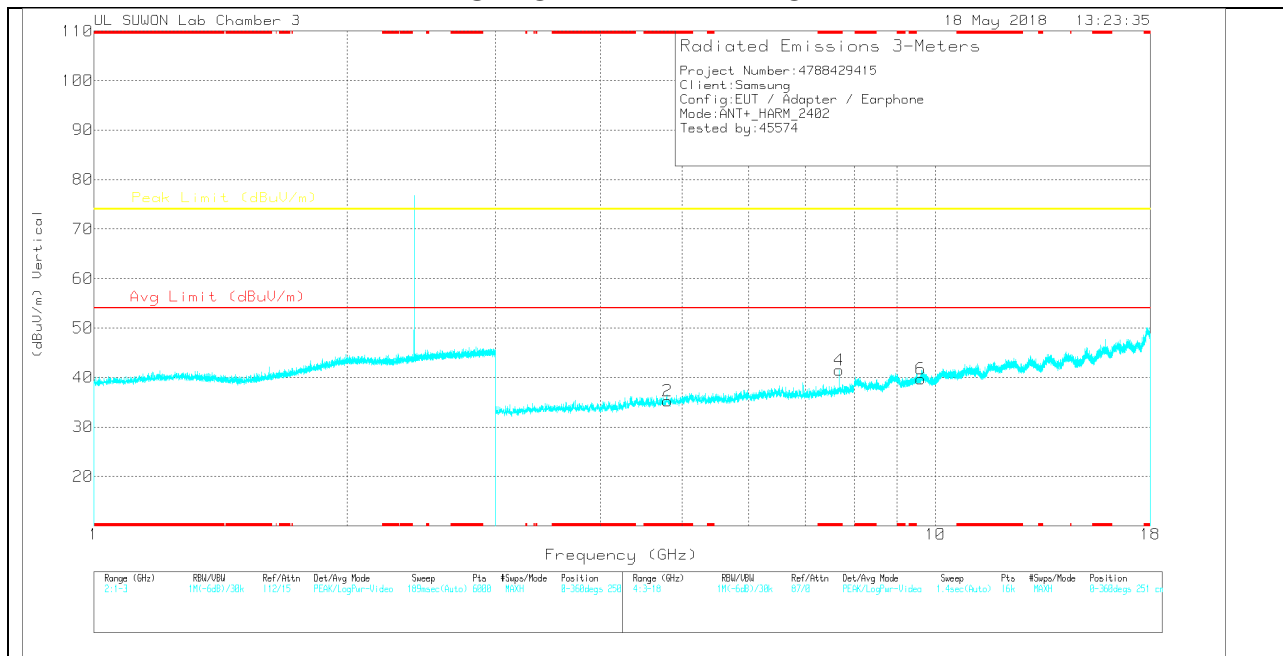

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

### LOW CHANNEL DATA

#### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
1	* 4.804	30.64	PK		33.9	-28.2	0	36.34	-	-	74	-37.66	0-360	251	H
3	* 7.679	28.83	PK		35.6	-22.3	0	42.13	-	-	74	-31.87	0-360	150	H
5	9.609	22.6	PK		36.7	-19.9	0	39.4	-	-	74	-34.6	0-360	251	H
2	* 4.803	29.59	PK		33.9	-28.2	0	35.29	-	-	74	-38.71	0-360	251	V
4	* 7.679	28.23	PK		35.6	-22.3	0	41.53	-	-	74	-32.47	0-360	149	V
6	9.609	22.92	PK		36.7	-19.9	0	39.72	-	-	74	-34.28	0-360	251	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK – Peak Detector

#### Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
* 7.673	32.78	PK2		35.6	-22.4	0	45.98	-	-	74	-28.02	211	159	H
* 7.68	33.26	PK2		35.6	-22.3	0	46.56	-	-	74	-27.44	203	134	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK2 - KDB558074 Method: Maximum Peak

\* For marke 3 used the following method to do averaging:

$$DCCF = -32.51 \quad / \quad \text{Peak Reading} = \underline{45.98} \text{ dBu/Vm}$$

$$\text{Corrected AV reading} = \text{Peak Reading} + DCCF$$

$$= 45.98 + -32.51 = \underline{13.47} \text{ dBu/Vm} \quad \text{AVG Limit : 54 dBu/Vm, Margin } \underline{40.53} \text{ dB}$$


\* For marke 4 used the following method to do averaging:

$$DCCF = -32.51 \quad / \quad \text{Peak Reading} = \underline{46.56} \text{ dBu/Vm}$$


$$\text{Corrected AV reading} = \text{Peak Reading} + DCCF$$

$$= 46.56 + -32.51 = \underline{14.05} \text{ dBu/Vm} \quad \text{AVG Limit : 54 dBu/Vm, Margin } \underline{39.95} \text{ dB}$$

### MID CHANNEL HORIZONTAL

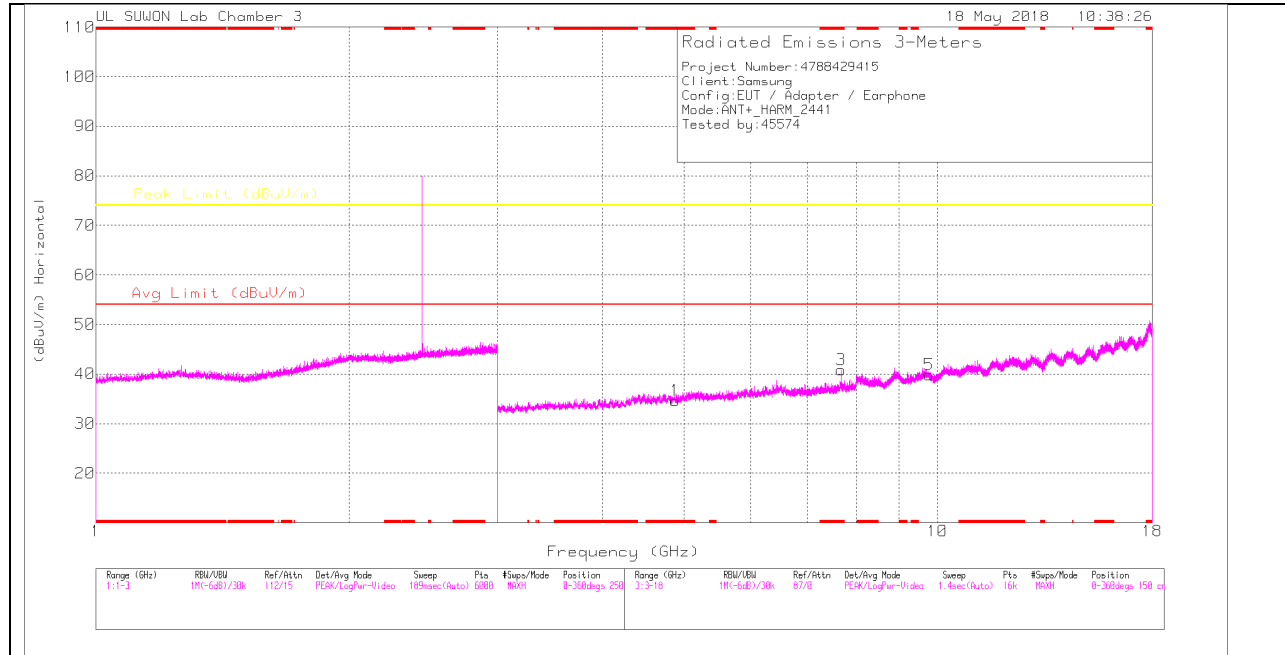

### MID CHANNEL VERTICAL

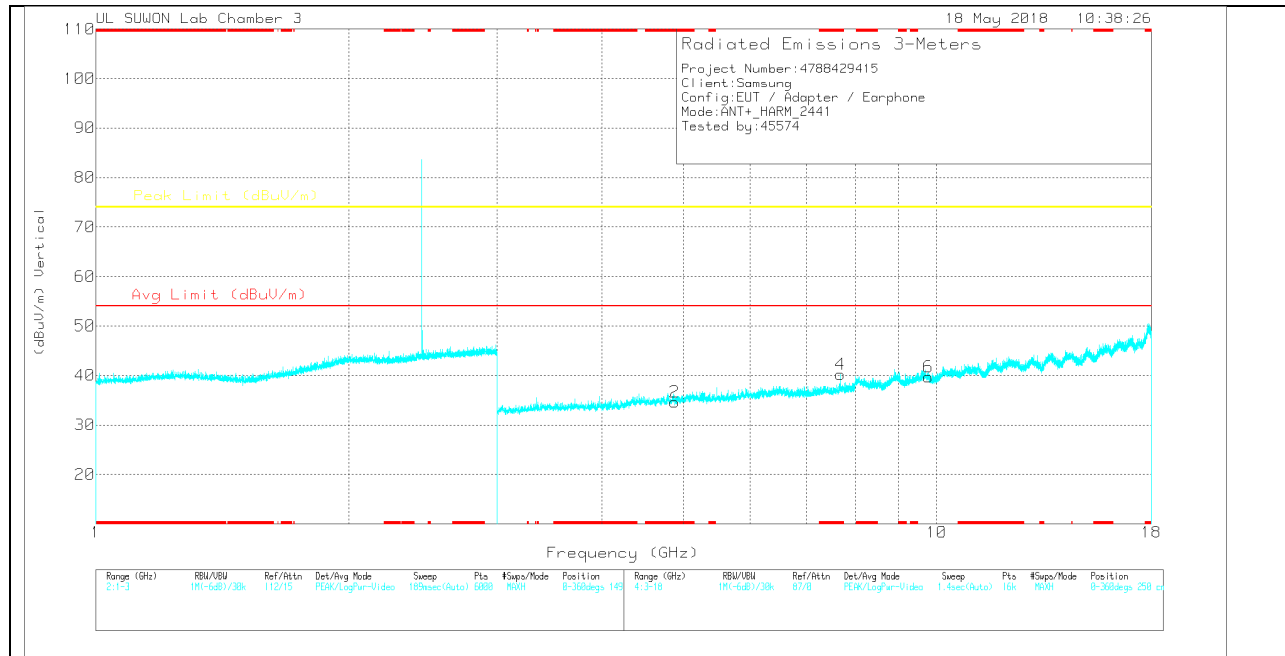

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.883	29.56	PK	34	-28.9	0	34.66	-	-	74	-39.34	0-360	250	H
3	* 7.68	27.66	PK	35.6	-22.4	0	40.86	-	-	74	-33.14	0-360	150	H
5	9.766	22.57	PK	36.9	-19.6	0	39.87	-	-	74	-34.13	0-360	250	H
2	* 4.883	29.52	PK	34	-28.9	0	34.62	-	-	74	-39.38	0-360	149	V
4	* 7.679	26.96	PK	35.6	-22.3	0	40.26	-	-	74	-33.74	0-360	149	V
6	9.766	22.44	PK	36.9	-19.6	0	39.74	-	-	74	-34.26	0-360	149	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK – Peak Detector

**Radiated Emissions**


Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 7.68	32.85	PK2	35.6	-22.3	0	46.15	-	-	74	-27.85	211	160	H
* 7.68	32.83	PK2	35.6	-22.3	0	46.13	-	-	74	-27.87	203	134	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK2 - KDB558074 Method: Maximum Peak


\* For marke 3 used the following method to do averaging:  
 DCCF = -32.51 / Peak Reading = 46.15 dBuV/m  
 Corrected AV reading = Peak Reading + DCCF  
 = 46.15 + -32.51 = 13.64 dBuV/m ;AVG Limit : 54 dBuV/m, Margin 40.36 dB]

\* For marke 4 used the following method to do averaging:  
 DCCF = -32.51 / Peak Reading = 46.13 dBuV/m  
 Corrected AV reading = Peak Reading + DCCF  
 = 46.13 + -32.51 = 13.62 dBuV/m ;AVG Limit : 54 dBuV/m, Margin 40.38 dB]

### HIGH CHANNEL HORIZONTAL

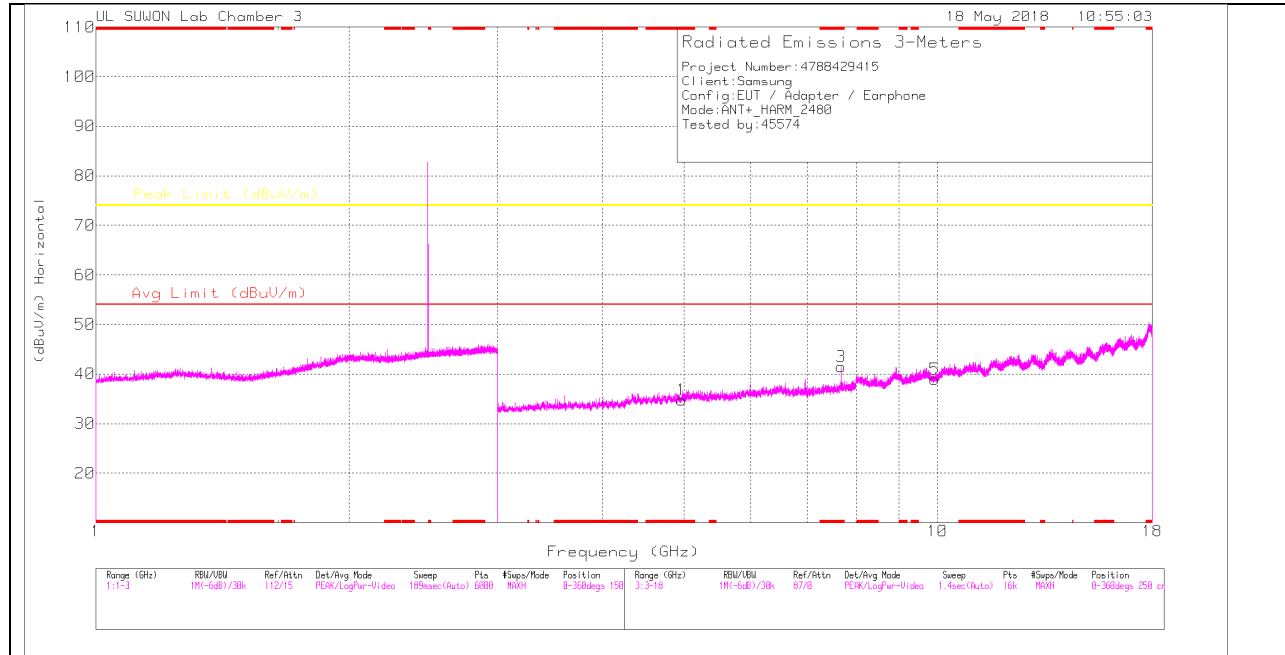

### HIGH CHANNEL VERTICAL

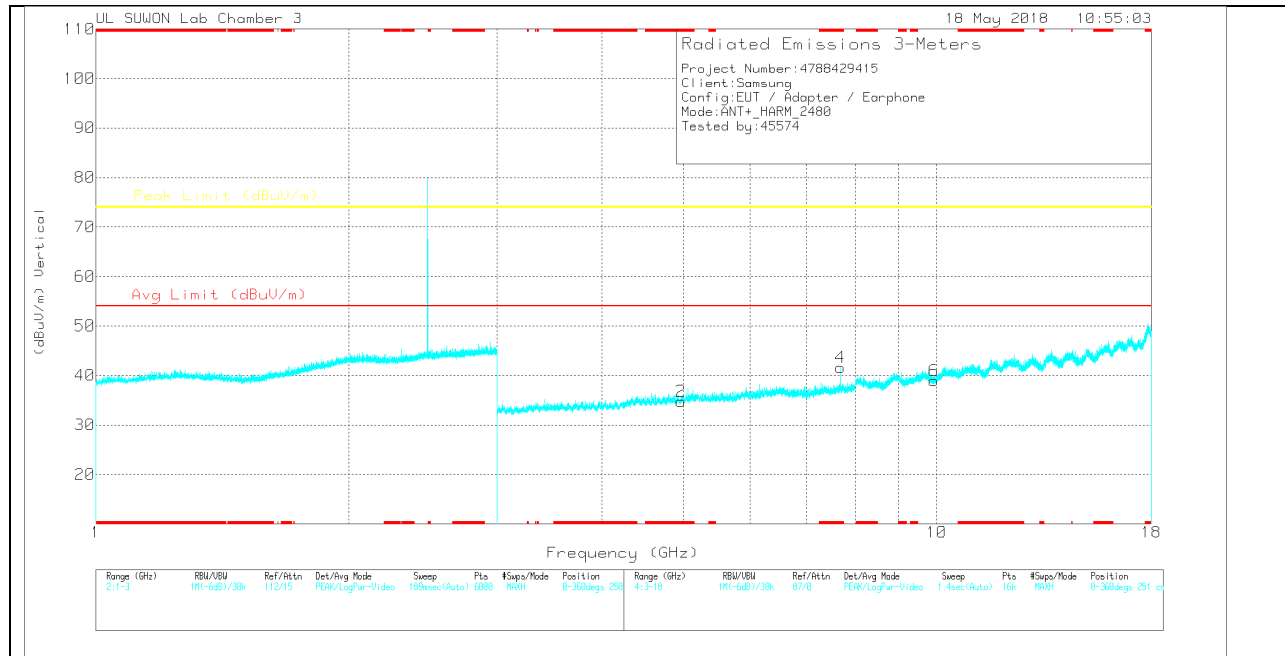

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



## HIGH CHANNEL DATA

### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.96	29.13	Avg	34.1	-28.5	0	34.73	-	-	74	-39.27	0-360	250	H
3	* 7.679	28.18	Avg	35.6	-22.3	0	41.48	-	-	74	-32.52	0-360	150	H
5	9.921	21.64	Avg	37	-19.7	0	38.94	-	-	74	-35.06	0-360	250	H
2	* 4.96	29.12	Avg	34.1	-28.5	0	34.72	-	-	74	-39.28	0-360	251	V
4	* 7.679	28.26	Avg	35.6	-22.3	0	41.56	-	-	74	-32.44	0-360	149	V
6	9.92	21.64	Avg	37	-19.7	0	38.94	-	-	74	-35.06	0-360	149	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Avg - Video bandwidth < Resolution bandwidth

### Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	3GHz_HP[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 7.68	35.94	PK2	35.6	-22.3	0	49.24	-	-	74	-24.76	211	160	H
* 7.68	36.91	PK2	35.6	-22.3	0	50.21	-	-	74	-23.79	203	136	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK2 - KDB558074 Method: Maximum Peak

\* For marke 3 used the following method to do averaging:  
 DCCF = -32.51 / Peak Reading = 49.24 dBuV/m  
 Corrected AV reading = Peak Reading + DCCF  
 = 49.24 + -32.51 = 16.73 dBuV/m ;AVG Limit : 54 dBuV/m, Margin 37.27 dB]


\* For marke 4 used the following method to do averaging:  
 DCCF = -32.51 / Peak Reading = 50.21 dBuV/m  
 Corrected AV reading = Peak Reading + DCCF  
 = 50.21 + -32.51 = 17.7 dBuV/m ;AVG Limit : 54 dBuV/m, Margin 36.3 dB]

### 7.2.5. SPURIOUS BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (HORIZONTAL)

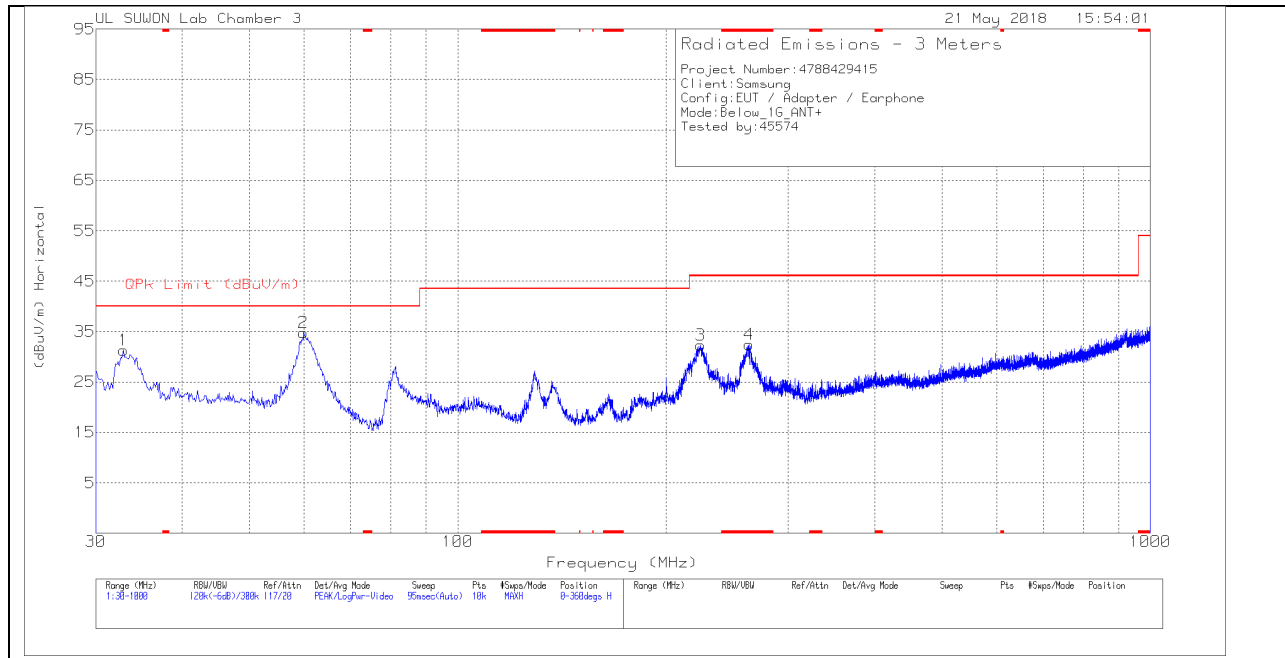

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (VERTICAL)

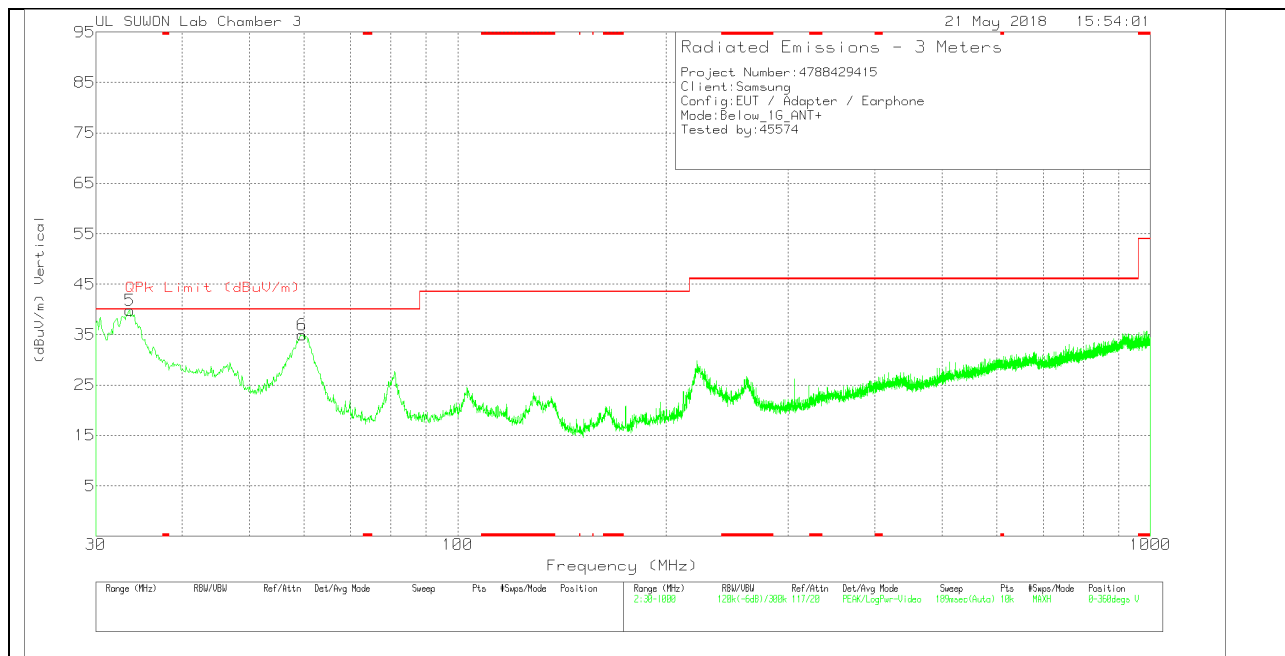

**BELOW 1 GHz TABLE**

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163-845	30-1000MHz[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	32.9103	47.02	Pk	16.5	-32.2	31.32	40	-8.68	0-360	400	H
2	59.8791	48.06	Pk	18.6	-31.9	34.76	40	-5.24	0-360	400	H
3	224.214	45.87	Pk	17.4	-31	32.27	46.02	-13.75	0-360	100	H
4	* 263.4061	44.61	Pk	18.6	-30.8	32.41	46.02	-13.61	0-360	100	H
5	33.5894	55.14	Pk	16.7	-32.1	39.74	40	-.26	0-360	100	V
6	59.5881	48.17	Pk	18.6	-31.8	34.97	40	-5.03	0-360	100	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector

Radiated Emissions


Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163-845	30-1000MHz[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
59.8791	45.85	Qp	18.6	-31.9	32.55	40	-7.45	19	394	H
33.5894	50.1	Qp	16.7	-32.1	34.7	40	-5.3	272	100	V
59.5881	47.43	Qp	18.6	-31.8	34.23	40	-5.77	36	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Qp - Quasi-Peak detector

**SPURIOUS EMISSIONS 30 TO 1000 MHz (HORIZONTAL Equipped with Keyboard)**

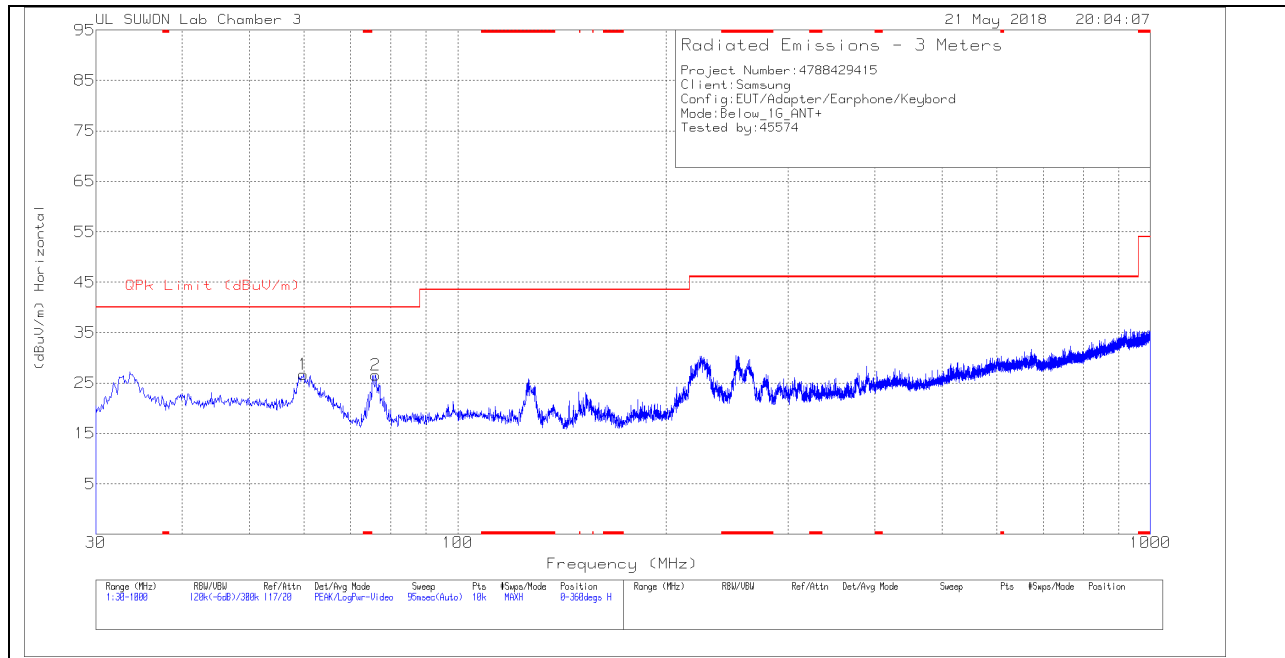

**SPURIOUS EMISSIONS 30 TO 1000 MHz (VERTICAL Equipped with Keyboard)**

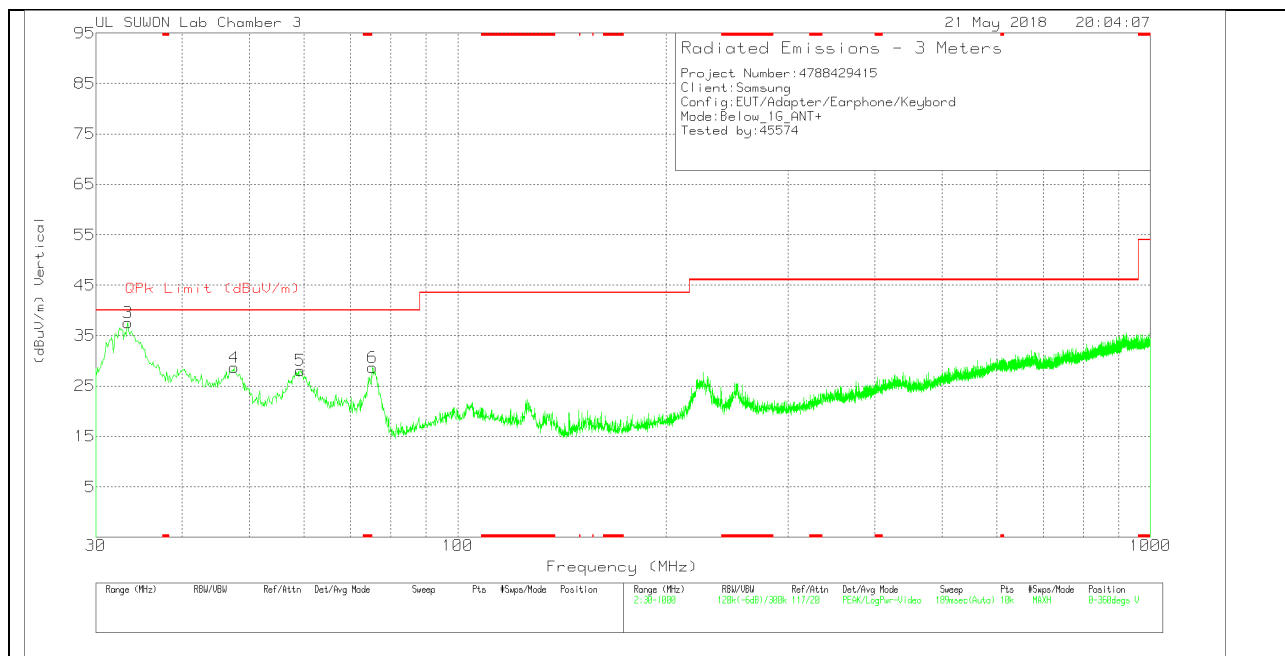

**BELOW 1 GHz TABLE**

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163-845	30-1000MHz[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	59.8791	39.95	Pk	18.6	-31.9	26.65	40	-13.35	0-360	400	H
2	76.0798	45.05	Pk	13.3	-31.8	26.55	40	-13.45	0-360	300	H
3	33.3954	53.22	Pk	16.6	-32.3	37.52	40	-2.48	0-360	100	V
4	47.5588	40.44	Pk	20.1	-31.9	28.64	40	-11.36	0-360	100	V
5	59.2	41.18	Pk	18.7	-31.8	28.08	40	-11.92	0-360	200	V
6	75.3037	46.94	Pk	13.4	-31.7	28.64	40	-11.36	0-360	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163-845	30-1000MHz[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
33.3954	48.49	Qp	16.6	-32.3	32.79	40	-7.21	272	106	V
33.5894	50.1	Qp	16.7	-32.1	34.7	40	-5.3	272	100	V
59.5881	47.43	Qp	18.6	-31.8	34.23	40	-5.77	36	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Qp - Quasi-Peak detector

## 8. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)  
IC RSS-GEN Clause 8.8

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

**RESULTS**

**6 WORST EMISSIONS**

**LINE 1 PLOT**

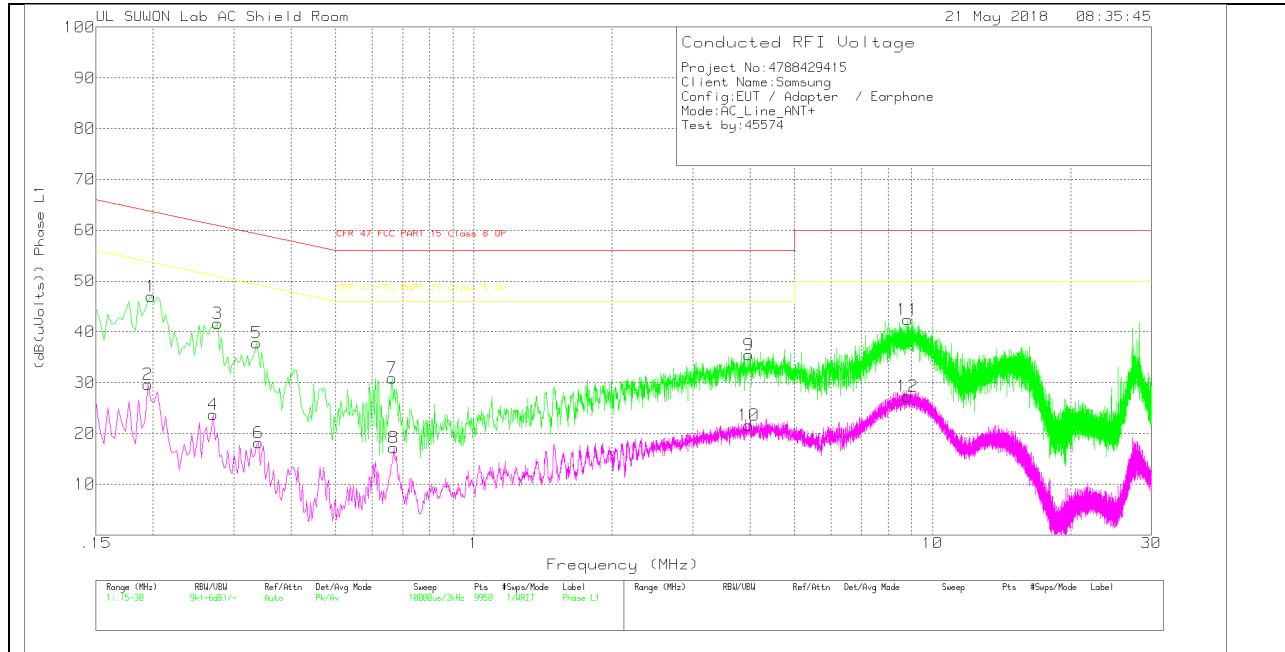

### LINE 1 RESULTS

#### Trace Markers


Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_L1_wit h extension	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.198	36.97	Pk	9.8	.2	46.97	63.69	-16.72	-	-
2	.195	19.65	Av	9.8	.2	29.65	-	-	53.82	-24.17
3	.276	31.88	Pk	9.6	.2	41.68	60.94	-19.26	-	-
4	.27	13.94	Av	9.6	.2	23.74	-	-	51.12	-27.38
5	.336	27.87	Pk	9.7	.2	37.77	59.3	-21.53	-	-
6	.339	8.2	Av	9.7	.2	18.1	-	-	49.23	-31.13
7	.663	20.93	Pk	9.8	.2	30.93	56	-25.07	-	-
8	.669	7.2	Av	9.8	.2	17.2	-	-	46	-28.8
9	3.975	25.4	Pk	9.8	.3	35.5	56	-20.5	-	-
10	3.972	11.52	Av	9.8	.3	21.62	-	-	46	-24.38
11	8.835	32.24	Pk	9.7	.4	42.34	60	-17.66	-	-
12	8.835	17.23	Av	9.7	.4	27.33	-	-	50	-22.67

Pk - Peak detector  
 Av - Average detection



**LINE 2 PLOT**

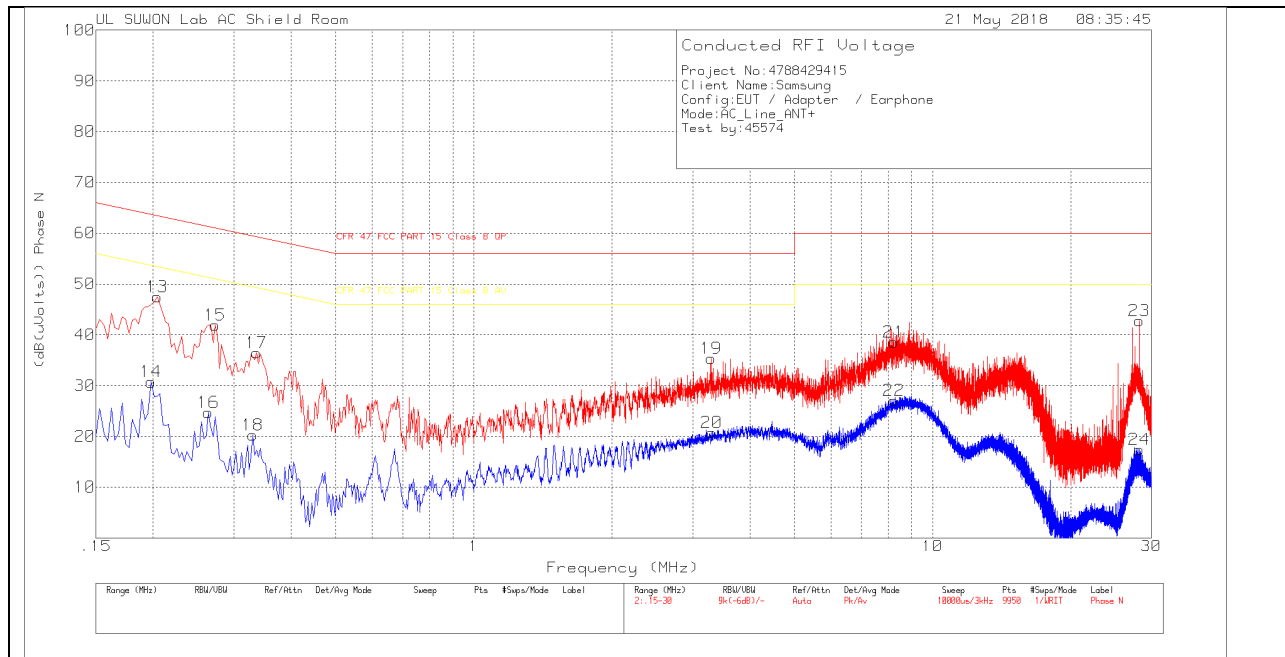

## LINE 2 RESULTS

### Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_N_with extension	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.204	37.45	Pk	9.8	.2	47.45	63.45	-16	-	-
14	.198	20.61	Av	9.9	.2	30.71	-	-	53.69	-22.98
15	.273	32.13	Pk	9.6	.2	41.93	61.03	-19.1	-	-
16	.264	14.96	Av	9.6	.2	24.76	-	-	51.3	-26.54
17	.336	26.57	Pk	9.7	.2	36.47	59.3	-22.83	-	-
18	.33	10.34	Av	9.7	.2	20.24	-	-	49.45	-29.21
19	3.288	25.3	Pk	9.8	.3	35.4	56	-20.6	-	-
20	3.297	10.66	Av	9.8	.3	20.76	-	-	46	-25.24
21	8.232	28.46	Pk	9.8	.3	38.56	60	-21.44	-	-
22	8.232	17	Av	9.8	.3	27.1	-	-	50	-22.9
23	28.215	32.21	Pk	10.3	.3	42.81	60	-17.19	-	-
24	28.215	6.83	Av	10.3	.3	17.43	-	-	50	-32.57

Pk - Peak detector

Av - Average detection