



**FCC 47 CFR § 2.1093  
IEEE Std 1528-2013**

**SAR EVALUATION REPORT**

**FOR**

**BT/BLE, DTS/UNII a/b/g/n/ac and ANT+ Tablet**

**MODEL NUMBER: SM-T830**

**FCC ID: A3LSMT830**

**REPORT NUMBER: 4788480746-S1V1**

**ISSUE DATE: 6/27/2018**

*Prepared for*  
**SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 16677, KOREA**

*Prepared by*

**UL Korea, Ltd.**

**26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea**

**Suwon Test Site: UL Korea, Ltd. Suwon Laboratory  
218 Maeyeong-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16675, Korea  
TEL: (031) 337-9902  
FAX: (031) 213-5433**



**TL-637**

**Revision History**

Rev.	Date	Revisions	Revised By
V1	6/27/2018	Initial Issue	Sunghoon Kim

**Table of Contents**

**1. Attestation of Test Results ..... 5**

**2. Test Specification, Methods and Procedures..... 6**

**3. Facilities and Accreditation ..... 6**

**4. SAR Measurement System & Test Equipment ..... 7**

    4.1. SAR Measurement System..... 7

    4.2. SAR Scan Procedures ..... 8

    4.3. Test Equipment..... 10

**5. Measurement Uncertainty..... 10**

**6. Device Under Test (DUT) Information ..... 11**

    6.1. DUT Description ..... 11

    6.2. Wireless Technologies..... 11

    6.3. Nominal and Maximum Output Power..... 12

**7. RF Exposure Conditions (Test Configurations) ..... 13**

    7.1 Standalone SAR Test Exclusion Considerations..... 13

    7.2 Required Test Configurations ..... 14

**8 Dielectric Property Measurements & System Check ..... 15**

    8.1 Dielectric Property Measurements ..... 15

    8.2 System Check..... 17

**9 Conducted Output Power Measurements..... 19**

    9.1 Wi-Fi 2.4GHz (DTS Band) ..... 19

    9.2 Wi-Fi 5GHz (U-NII Bands)..... 20

    9.3 Bluetooth ..... 21

**10 Measured and Reported (Scaled) SAR Results..... 21**

    10.1 Wi-Fi (DTS Band) ..... 22

    10.2 Wi-Fi (U-NII Band)..... 23

    10.3 Bluetooth ..... 23

**11 SAR Measurement Variability ..... 25**

**12 Simultaneous Transmission SAR Analysis ..... 26**

    12.1 Sum of the SAR for DTS & UNII ..... 27

**Appendixes ..... 28**



    4788480746-S1V1 FCC Report SAR\_App A\_Photos & Ant. Locations ..... 28

    4788480746-S1V1 FCC Report SAR\_App B\_Highest SAR Test Plots ..... 28

---

<i>4788480746-S1V1 FCC Report SAR_App C_System Check Plots .....</i>	<i>28</i>
<i>4788480746-S1V1 FCC Report SAR_App D_SAR Tissue Ingredients.....</i>	<i>28</i>
<i>4788480746-S1V1 FCC Report SAR_App E_Probe Cal. Certificates.....</i>	<i>28</i>
<i>4788480746-S1V1 FCC Report SAR_App F_Dipole Cal. Certificates .....</i>	<i>28</i>

# 1. Attestation of Test Results

Applicant Name	SAMSUNG ELECTRONICS CO.,LTD.		
FCC ID	A3LSMT830		
Model Name	SM-T830		
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013		
<b>SAR Limits (W/Kg)</b>			
Exposure Category	Peak spatial-average(1g of tissue)		
General population / Uncontrolled exposure	1.6		
<b>The Highest Reported SAR (W/kg)</b>			
<b>RF Exposure Conditions</b>	<b>Equipment Class</b>		
	<b>DTS</b>	<b>U-NII</b>	<b>DSS(BT)</b>
Standalone	1.07	0.76	N/A
Simultaneous TX	1.54	1.28	N/A
Date Tested	6/12/2018 to 6/26/2018		
Test Results	Pass		
<p>UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p><b>Note:</b> The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.</p>			
Approved & Released By:	Prepared By:		
			
Justin Park Lead Test Engineer UL Korea, Ltd. Suwon Laboratory	Sunghoon Kim Associate Test Engineer UL Korea, Ltd. Suwon Laboratory		

## 2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 616217 D04 SAR for laptop and tablets v01r02
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02

## 3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

Suwon
SAR 1 Room
SAR 2 Room
SAR 3 Room


UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.

The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

## 4. SAR Measurement System & Test Equipment

### 4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

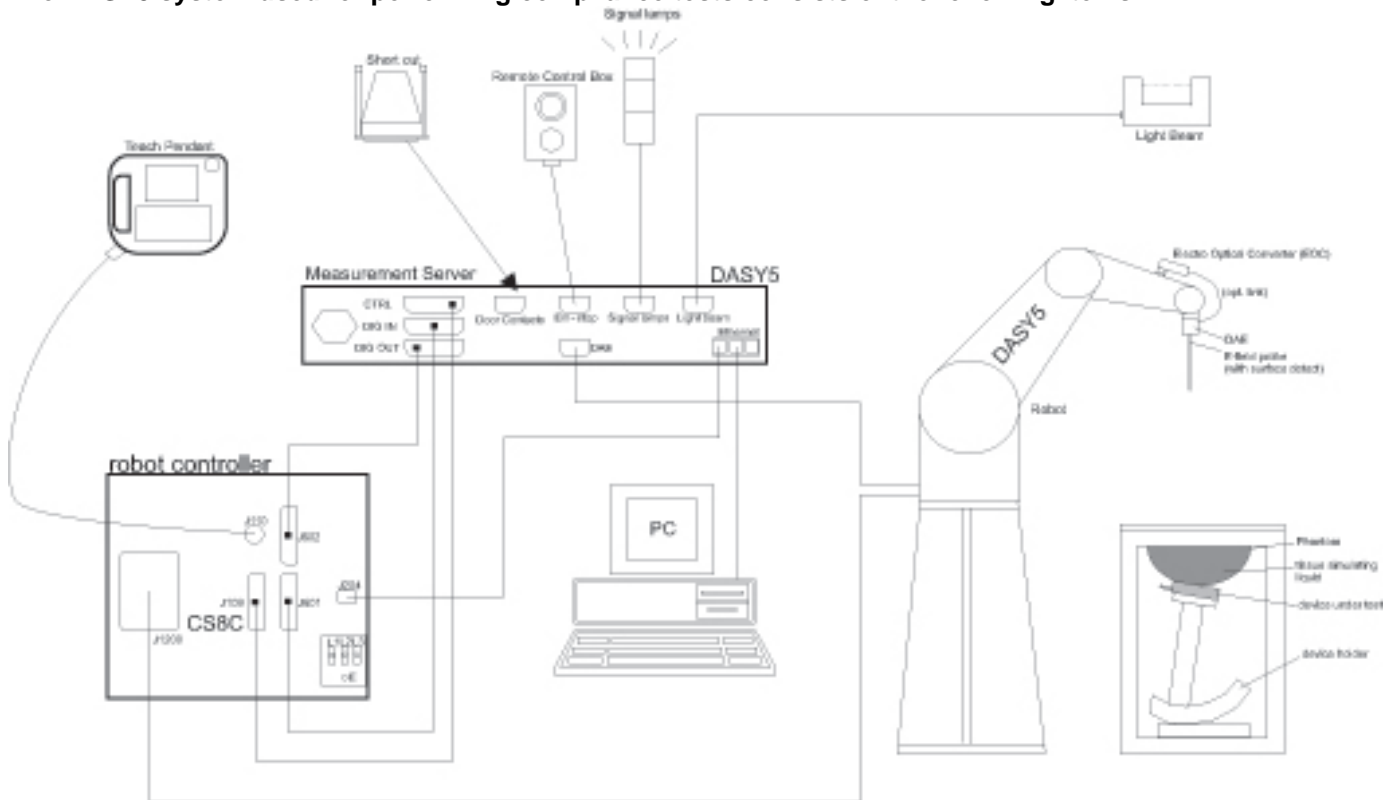

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 4.2. SAR Scan Procedures

### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



**Step 3: Zoom Scan**

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		$\leq 3$ GHz	$> 3$ GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm *	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**Step 4: Power drift measurement**

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

**Step 5: Z-Scan (FCC only)**

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

### 4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

#### Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E5071C	MY46522054	8-8-2018
Dielectric Assessment Kit	SPEAG	DAK-3.5	1196	8-2-2018
Dielectric Assessment Kit	SPEAG	DAK-3.5	1046	4-17-2019
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	LKM	DTM3000	3424	8-11-2018
Thermometer	Lutron	MHB-382SD	AH.91478	8-10-2018

#### System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
MXG Analog Signal Generator	Agilent	N5181A	MY50145882	8-7-2018
Power Sensor	Agilent	U2000A	MY54260010	8-8-2018
Power Sensor	Agilent	U2000A	MY54260007	8-8-2018
Power Amplifier	EXODUS	1410025-AMP2027-10003	10003	8-8-2018
Directional Coupler	Agilent	772D	MY52180193	8-7-2018
Low Pass Filter	FILTRON	L14012FL	1410003S	8-7-2018
Low Pass Filter	MICROLAB	LA-60N	03942	8-7-2018
Attenuator	Agilent	8491B/003	MY39269292	8-7-2018
Attenuator	Agilent	8491B/010	MY39269315	8-7-2018
Attenuator	Agilent	8491B/020	MY39269298	8-7-2018
E-Field Probe (SAR1)	SPEAG	EX3DV4	7376	8-22-2018
E-Field Probe (SAR3)	SPEAG	EX3DV4	7314	9-28-2018
Data Acquisition Electronics (SAR1)	SPEAG	DAE4	1468	8-22-2018
Data Acquisition Electronics (SAR3)	SPEAG	DAE4	1494	7-20-2018
System Validation Dipole	SPEAG	D2450V2	939	9-19-2018
System Validation Dipole	SPEAG	D5GHzV2	1209	2-15-2019
Thermometer (SAR1)	Lutron	MHB-382SD	AH.91463	8-10-2018
Thermometer (SAR3)	Lutron	MHB-382SD	AH.50213	8-16-2018

### 5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

## 6. Device Under Test (DUT) Information

### 6.1. DUT Description

Device Dimension	Overall (Length x Width): 249.3 mm x 164.3 mm Overall Diagonal: 290.0 mm Display Diagonal: 267.0 mm												
Back Cover	<input checked="" type="checkbox"/> The Back Cover is not removable.												
Battery Options	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible.												
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 5 GHz, Ch.36 – Ch.48, Ch.149 – Ch.165)												
Test Sample Information	<table border="1"> <thead> <tr> <th>No.</th> <th>S/N</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>R32K300GACA</td> <td>Wi-Fi Conducted</td> </tr> <tr> <td>2</td> <td>R32K300GA2M</td> <td>SAR</td> </tr> <tr> <td>3</td> <td>R32K300G7ZJ</td> <td>SAR</td> </tr> </tbody> </table>	No.	S/N	Notes	1	R32K300GACA	Wi-Fi Conducted	2	R32K300GA2M	SAR	3	R32K300G7ZJ	SAR
No.	S/N	Notes											
1	R32K300GACA	Wi-Fi Conducted											
2	R32K300GA2M	SAR											
3	R32K300G7ZJ	SAR											

### 6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
Wi-Fi	2.4 GHz	802.11b	99.5% (802.11b)
		802.11g	96.9% (802.11g)
		802.11n (HT20)	96.8% (802.11n 20MHz BW)
	5 GHz	802.11a	97.2% (802.11a)
802.11n (HT20)		96.9% (802.11n/ac 20MHz BW)	
802.11n (HT40)		94.5% (802.11n/ac 40MHz BW)	
802.11ac (VHT20)		88.4% (802.11ac 80MHz BW)	
802.11ac (VHT40)			
802.11ac (VHT80)			
	Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		
	Does this device support Band gap channel(s)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		
Bluetooth	2.4 GHz	Version 5.0 LE	76.9% (DH5)

**Notes:**

- Duty cycle for Wi-Fi is referenced from the DTS and UNII report.

### 6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1. at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

RF Air interface	Mode	Max. RF Output Power (dBm)	
		Ant.1	Ant.2
WiFi 2.4 GHz (Ch.1 - Ch.11)	802.11b	<b>13.0</b>	<b>13.0</b>
	802.11g	<b>13.0</b>	<b>13.0</b>
	802.11n HT20	<b>13.0</b>	<b>13.0</b>
WiFi 2.4 GHz (Ch.12)	802.11b	<b>9.0</b>	<b>9.0</b>
	802.11g	<b>9.0</b>	<b>9.0</b>
	802.11n HT20	<b>9.0</b>	<b>9.0</b>
WiFi 2.4 GHz (Ch.13)	802.11b	<b>2.0</b>	<b>2.0</b>
	802.11g	<b>2.0</b>	<b>2.0</b>
	802.11n HT20	<b>2.0</b>	<b>2.0</b>
WiFi 5 GHz	802.11a	<b>10.0</b>	<b>10.0</b>
	802.11n HT20	<b>10.0</b>	<b>10.0</b>
	802.11n HT40	<b>10.0</b>	<b>10.0</b>
	802.11ac VHT20	<b>10.0</b>	<b>10.0</b>
	802.11ac VHT40	<b>10.0</b>	<b>10.0</b>
	802.11ac VHT80	<b>10.0</b>	<b>10.0</b>
Bluetooth		<b>9.5</b>	
Bluetooth LE		<b>2.6</b>	

## 7. RF Exposure Conditions (Test Configurations)

Refer to “SAR Photos and Ant locations” Appendix for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

### 7.1 Standalone SAR Test Exclusion Considerations

Since the *Dedicated Host Approach* is applied, the standalone SAR test exclusion procedure in KDB 447498 § 4.3.1 is applied in conjunction with KDB 616217 § 4.3 to determine the minimum test separation distance:

- When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.
- When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.

### SAR Test Exclusion Calculations for WLAN

#### Antenna.1 < 50mm to adjacent edges

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Wi-Fi 2.4 GHz	2462	13.00	20.0	0	243	20	3	122		6.3 -MEASURE-	> 50 mm	1.6 -EXEMPT-	6.3 -MEASURE-	> 50 mm	
Wi-Fi 5.3 GHz	5320	10.00	10.0	0	243	20	3	122		4.6 -MEASURE-	> 50 mm	1.2 -EXEMPT-	4.6 -MEASURE-	> 50 mm	
Wi-Fi 5.5 GHz	5720	10.00	10.0	0	243	20	3	122		4.8 -MEASURE-	> 50 mm	1.2 -EXEMPT-	4.8 -MEASURE-	> 50 mm	
Wi-Fi 5.8 GHz	5825	10.00	10.0	0	243	20	3	122		4.8 -MEASURE-	> 50 mm	1.2 -EXEMPT-	4.8 -MEASURE-	> 50 mm	
Bluetooth	2480	9.50	9.0	0	243	20	3	122		2.8 -EXEMPT-	> 50 mm	0.7 -EXEMPT-	2.8 -EXEMPT-	> 50 mm	

#### Antenna.2 < 50mm to adjacent edges

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Wi-Fi 2.4 GHz	2462	13.00	20.0	0	243	121	3	20		6.3 -MEASURE-	> 50 mm	> 50 mm	6.3 -MEASURE-	1.6 -EXEMPT-	
Wi-Fi 5.3 GHz	5320	10.00	10.0	0	243	121	3	20		4.6 -MEASURE-	> 50 mm	> 50 mm	4.6 -MEASURE-	1.2 -EXEMPT-	
Wi-Fi 5.5 GHz	5720	10.00	10.0	0	243	121	3	20		4.8 -MEASURE-	> 50 mm	> 50 mm	4.8 -MEASURE-	1.2 -EXEMPT-	
Wi-Fi 5.8 GHz	5825	10.50	10.0	0	243	121	3	20		4.8 -MEASURE-	> 50 mm	> 50 mm	4.8 -MEASURE-	1.2 -EXEMPT-	

#### Note(s):

1. According to KDB 447498, if the calculated threshold value is >3 then SAR testing is required.

#### Antenna.2 > 50mm to adjacent edges

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Wi-Fi 2.4 GHz	2462	13.00	20.0	0	243	20	3	122		< 50 mm	2025.6 mW -EXEMPT-	< 50 mm	< 50 mm	815.6 mW -EXEMPT-	
Wi-Fi 5.3 GHz	5320	10.00	10.0	0	243	20	3	122		< 50 mm	1995 mW -EXEMPT-	< 50 mm	< 50 mm	785 mW -EXEMPT-	
Wi-Fi 5.5 GHz	5720	10.00	10.0	0	243	20	3	122		< 50 mm	1992.7 mW -EXEMPT-	< 50 mm	< 50 mm	782.7 mW -EXEMPT-	
Wi-Fi 5.8 GHz	5825	10.00	10.0	0	243	20	3	122		< 50 mm	1992.2 mW -EXEMPT-	< 50 mm	< 50 mm	782.2 mW -EXEMPT-	
Bluetooth	2480	9.50	9.0	0	243	20	3	122		< 50 mm	2025.3 mW -EXEMPT-	< 50 mm	< 50 mm	815.3 mW -EXEMPT-	

#### Antenna.2 > 50mm to adjacent edges

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Wi-Fi 2.4 GHz	2462	13.00	20.0	0	243	121	3	20		< 50 mm	2025.6 mW -EXEMPT-	805.6 mW -EXEMPT-	< 50 mm	< 50 mm	
Wi-Fi 5.3 GHz	5320	10.00	10.0	0	243	121	3	20		< 50 mm	1995 mW -EXEMPT-	775 mW -EXEMPT-	< 50 mm	< 50 mm	
Wi-Fi 5.5 GHz	5720	10.00	10.0	0	243	121	3	20		< 50 mm	1992.7 mW -EXEMPT-	772.7 mW -EXEMPT-	< 50 mm	< 50 mm	
Wi-Fi 5.8 GHz	5825	10.00	10.0	0	243	121	3	20		< 50 mm	1992.2 mW -EXEMPT-	772.2 mW -EXEMPT-	< 50 mm	< 50 mm	

#### Note(s):

1. According to KDB 447498, if the calculated Power threshold is less than the output power then SAR testing is required.

## 7.2 Required Test Configurations

The table below identifies the standalone test configurations required for this device according to the findings in Section 7.1:

Test Configurations	Pwr Back-off	Rear	Edge 1	Edge 2	Edge 3	Edge 4
			(Top Edge)	(Right Edge )	(Bottom Edge)	(Left Edge)
Wi-Fi 2.4 GHz_Ant.1	N/A	Yes	No	No	Yes	No
Wi-Fi 2.4 GHz_Ant.2	N/A	Yes	No	No	Yes	No
Wi-Fi 5.3 GHz_Ant.1	N/A	Yes	No	No	Yes	No
Wi-Fi 5.3 GHz_Ant.2	N/A	Yes	No	No	Yes	No
Wi-Fi 5.5 GHz_Ant.1	N/A	Yes	No	No	Yes	No
Wi-Fi 5.5 GHz_Ant.2	N/A	Yes	No	No	Yes	No
Wi-Fi 5.8 GHz_Ant.1	N/A	Yes	No	No	Yes	No
Wi-Fi 5.8 GHz_Ant.2	N/A	Yes	No	No	Yes	No
Bluetooth	N/A	No	No	No	No	No

### Note(s):

1. Yes = Testing is required. No = Testing is not required..

## 8 Dielectric Property Measurements & System Check

### 8.1 Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

#### Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Body	
	$\epsilon_r$	$\sigma$ (S/m)
150	61.9	0.80
300	58.2	0.92
450	56.7	0.94
835	55.2	0.97
900	55.0	1.05
915	55.0	1.06
1450	54.0	1.30
1610	53.8	1.40
1800 – 2000	53.3	1.52
2450	52.7	1.95
3000	52.0	2.73
5000	49.3	5.07
5100	49.1	5.18
5200	49.0	5.30
5300	48.9	5.42
5400	48.7	5.53
5500	48.6	5.65
5600	48.5	5.77
5700	48.3	5.88
5800	48.2	6.00

#### IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

**Dielectric Property Measurements Results:**

**SAR 1 Room**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
6-25-2018	Body 2450	e'	52.5700	Relative Permittivity ( $\epsilon_r$ ):	52.57	52.70	-0.25	5
		e"	14.6300	Conductivity ( $\sigma$ ):	1.99	1.95	2.21	5
	Body 2400	e'	52.8400	Relative Permittivity ( $\epsilon_r$ ):	52.84	52.77	0.13	5
		e"	14.5500	Conductivity ( $\sigma$ ):	1.94	1.90	2.30	5
	Body 2480	e'	52.4200	Relative Permittivity ( $\epsilon_r$ ):	52.42	52.66	-0.46	5
		e"	14.7000	Conductivity ( $\sigma$ ):	2.03	1.99	1.75	5

**SAR 3 Room**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
6-12-2018	Body 5250	e'	48.3100	Relative Permittivity ( $\epsilon_r$ ):	48.31	48.95	-1.31	5
		e"	17.6900	Conductivity ( $\sigma$ ):	5.16	5.35	-3.53	5
	Body 5260	e'	48.3100	Relative Permittivity ( $\epsilon_r$ ):	48.31	48.94	-1.28	5
		e"	17.7100	Conductivity ( $\sigma$ ):	5.18	5.36	-3.45	5
	Body 5600	e'	47.8200	Relative Permittivity ( $\epsilon_r$ ):	47.82	48.48	-1.36	5
		e"	18.0100	Conductivity ( $\sigma$ ):	5.61	5.76	-2.66	5
	Body 5750	e'	47.6400	Relative Permittivity ( $\epsilon_r$ ):	47.64	48.27	-1.31	5
		e"	18.1500	Conductivity ( $\sigma$ ):	5.80	5.94	-2.24	5
	Body 5825	e'	47.5100	Relative Permittivity ( $\epsilon_r$ ):	47.51	48.20	-1.43	5
		e"	18.2400	Conductivity ( $\sigma$ ):	5.91	6.00	-1.54	5



## 8.2 System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

### System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.  
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 2.5 mm.  
For 5 GHz band - Distance between probe sensors and phantom surface was set to 1.4 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

### Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)	
				1g/10g	Body
D2450V2	939	9-19-2017	2450	1g	50.70
				10g	23.90
D5GHzV2	1209	2-15-2018	5250	1g	75.70
				10g	21.00
			5600	1g	79.00
				10g	21.90
			5750	1g	75.60
				10g	20.80

**System Check Results**

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

**SAR 1 Room**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
6-25-2018	D2450V2	939	Body	1g	5.09	50.90	50.70	0.39	1, 2
				10g	2.31	23.10	23.90	-3.35	

**SAR 3 Room**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
6-12-2018	D5GHzV2	1209	Body	1g	7.33	73.30	75.70	-3.17	
				10g	2.04	20.40	21.00	-2.86	
6-12-2018	D5GHzV2	1209	Body	1g	8.38	83.80	79.00	6.08	3, 4
				10g	2.30	23.00	21.90	5.02	
6-12-2018	D5GHzV2	1209	Body	1g	7.23	72.30	75.60	-4.37	
				10g	2.00	20.00	20.80	-3.85	

## 9 Conducted Output Power Measurements

### 9.1 Wi-Fi 2.4GHz (DTS Band)

#### Measured Results

Antenna	Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Pwr.		
						Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
Ant.1	2.4	802.11b	1 Mbps	1	2412	12.2	13.0	Yes
				6	2437	12.8		
				11	2462	12.0		
				12	2467	8.8	9.0	
				13	2472	1.6	2.0	
		1	2412	12.8	13.0	No		
	6	2437	12.6					
	11	2462	12.8					
	12	2467	8.7	9.0				
	13	2472	0.8	2.0				
	1	2412	12.6	13.0	No			
	6	2437	12.4					
	11	2462	12.6					
12	2467	8.5	9.0					
13	2472	0.6	2.0					

Antenna	Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Pwr.		
						Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
Ant.2	2.4	802.11b	1 Mbps	1	2412	12.5	13.0	Yes
				6	2437	12.7		
				11	2462	12.9		
				12	2467	8.6	9.0	
				13	2472	1.7	2.0	
		1	2412	12.3	13.0	No		
	6	2437	12.5					
	11	2462	12.9					
	12	2467	8.6	9.0				
	13	2472	1.2	2.0				
	1	2412	12.1	13.0	No			
	6	2437	12.3					
	11	2462	12.7					
12	2467	8.4	9.0					
13	2472	1.0	2.0					

#### Note(s):

- Output Power and SAR is not required for 802.11g/n HT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

## 9.2 Wi-Fi 5GHz (U-NII Bands)

### Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Ant.1 Max Pwr.			Ant.2 Max Pwr.		
					Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
5.3 (U-NII 2A)	802.11a	6 Mbps	52	5260	Not Required	10.0	No	Not Required	10.0	No
			56	5280						
			60	5300						
			64	5320						
	802.11n (HT20)	6.5 Mbps	52	5260						
			56	5280						
			60	5300						
	802.11n (HT40)	13.5 Mbps	54	5270						
			62	5310						
	802.11ac (VHT20)	6.5 Mbps	52	5260						
56			5280							
60			5300							
802.11ac (VHT40)	13.5 Mbps	54	5270							
		62	5310							
802.11ac (VHT80)	29.3 Mbps	58	5290	9.4	10.0	Yes	9.8	10.0	Yes	
5.5 (U-NII 2C)	802.11a	6 Mbps	100	5500	Not Required	10.0	No	Not Required	10.0	No
			120	5600						
			124	5620						
			144	5720						
	802.11n (HT20)	6.5 Mbps	100	5500						
			120	5600						
			124	5620						
			144	5720						
	802.11n (HT40)	13.5 Mbps	102	5510						
			118	5590						
			126	5630						
			142	5710						
	802.11ac (VHT20)	6.5 Mbps	100	5500						
			120	5600						
			124	5620						
			144	5720						
802.11ac (VHT40)	13.5 Mbps	102	5510							
		118	5590							
		126	5630							
		142	5710							
802.11ac (VHT80)	29.3 Mbps	106	5530	9.6	10.0	Yes	9.1	10.0	Yes	
		122	5610	9.7			9.1			
		138	5690	9.9			9.0			
5.8 (U-NII 3)	802.11a	6 Mbps	149	5745	Not Required	10.0	Yes	Not Required	10.0	No
			157	5785						
			165	5825						
	802.11n (HT20)	6.5 Mbps	149	5745						
			157	5785						
			165	5825						
	802.11n (HT40)	13.5 Mbps	151	5755						
			159	5795						
	802.11ac (VHT20)	6.5 Mbps	149	5745						
			157	5785						
165			5825							
802.11ac (VHT40)	13.5 Mbps	151	5755							
		159	5795							
802.11ac (VHT80)	29.3 Mbps	155	5775	9.6	10.0	Yes	9.2	10.0	Yes	

### Note(s):

- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
  - ≤ 1.2 W/kg, SAR is not required for UNII band I
  - > 1.2 W/kg, both bands should be tested independently for SAR.

### 9.3 Bluetooth

Maximum tune-up tolerance limit is 9.5 dBm from the rated nominal maximum output power. This power level qualifies for exclusion of SAR testing. The reference to section 10.3 for explanation of rationale for exemption of testing.

## 10 Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

#### KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
- $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz

#### KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- $> 0.4$  W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is  $\leq 0.8$  W/kg or all required test positions are tested.
  - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
  - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is  $> 0.8$  W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required test channels are considered.
  - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is  $\leq 1.2$  W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is  $\leq 1.2$  W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

### 10.1 Wi-Fi (DTS Band)

Frequency Band	Mode	RF Exposure Conditions	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
2.4GHz	802.11b 1 Mbps	Standalone	Ant.1	0	Rear	6	2437.0	0.455	99.5	13.0	12.8	0.449	0.472	
					Edge 3	6	2437.0	0.305	99.5	13.0	12.8	0.307	0.323	
			Ant.2	0	Rear	1	2412.0	0.714	99.5	13.0	12.5	0.891	1.014	
						6	2437.0	0.866	99.5	13.0	12.7	0.998	1.065	1
						11	2462.0	0.647	99.5	13.0	12.9	0.775	0.790	
					Edge 3	11	2462.0	0.099	99.5	13.0	12.9	0.109	0.111	

**Note(s):**

- SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

### 10.2 Wi-Fi (U-NII Band)

Frequency Band	Mode	RF Exposure Conditions	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		Note	Plot No.
										Tune-up limit	Meas.	Meas.	Scaled		
5.3 GHz U-NII 2A	802.11ac 29.3 Mbps (VHT80)	Standalone	Ant.1	0	Rear	58	5290.0	1.753	88.4	10.0	9.4	0.576	0.755		2
					Edge 3	58	5290.0	0.447	88.4	10.0	9.4	0.135	0.177	2	
			Ant.2	0	Rear	58	5290.0	0.484	88.4	10.0	9.8	0.300	0.354	1	
					Edge 3	58	5290.0	0.190	88.4	10.0	9.8				
Frequency Band	Mode	RF Exposure Conditions	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		Note	Plot No.
5.5 GHz U-NII 2C	802.11ac 29.3 Mbps (VHT80)	Standalone	Ant.1	0	Rear	138	5690.0	1.517	88.4	10.0	9.9	0.576	0.662		3
					Edge 3	138	5690.0	0.265	88.4	10.0	9.9	0.074	0.085	2	
			Ant.2	0	Rear	122	5610.0	0.695	88.4	10.0	9.1	0.368	0.514		
					Edge 3	122	5610.0	0.331	88.4	10.0	9.1	0.110	0.154	2	
Frequency Band	Mode	RF Exposure Conditions	Antenna	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		Note	Plot No.
5.8 GHz U-NII 3	802.11ac 29.3 Mbps (VHT80)	Standalone	Ant.1	0	Rear	155	5775.0	1.038	88.4	10.0	9.6	0.561	0.689		4
					Edge 3	155	5775.0	0.234	88.4	10.0	9.6	0.059	0.072	2	
			Ant.2	0	Rear	155	5775.0	0.711	88.4	10.0	9.2	0.379	0.521		
					Edge 3	155	5775.0	0.202	88.4	10.0	9.2	0.068	0.093	2	

**Note(s):**

- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in this exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.
- Testing for a second channel was required because the reported SAR for this test position was >0.8 W/kg.
- Additional testing required in order satisfying FCC simultaneous transmission limit criteria.

### 10.3 Bluetooth

#### Standalone SAR Test Exclusion Considerations & Estimated SAR

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ , for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f_{(\text{GHz})}/x}] \text{ W/kg}$  for test separation distances ≤ 50 mm; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

#### Body Exposure Conditions

Antennas < 50mm to adjacent edges

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)					Calculated Threshold Value				
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Rear	Edge 1	Edge 2	Edge 3	Edge 4
Bluetooth	2480	9.50	9	0	243	20	3	122	2.8 -EXEMPT-	> 50 mm	0.7 -EXEMPT-	2.8 -EXEMPT-	> 50 mm

#### Note(s):

According to KDB 447498, if the calculated threshold value is >3 then SAR testing is required.

Antennas > 50mm to adjacent edges

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)					Calculated Threshold Value				
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Rear	Edge 1	Edge 2	Edge 3	Edge 4
Bluetooth	2480	9.50	9	0	243	20	3	122	< 50 mm	2025.3 mW -EXEMPT-	< 50 mm	< 50 mm	815.3 mW -EXEMPT-

#### Note(s):

According to KDB 447498, if the calculated Power threshold is less than the output power then SAR testing is required.



## 11 SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	First Repeated	
						Measured SAR (W/kg)	Largest to Smallest SAR Ratio
2400	Wi-Fi 802.11b/g/n	Standalone	Rear	Yes	0.998	1.020	1.02
5300	Wi-Fi 802.11a/n/ac	Standalone	Rear	No	0.576	N/A	N/A
5500	Wi-Fi 802.11a/n/ac	Standalone	Rear	No	0.576	N/A	N/A
5800	Wi-Fi 802.11a/n/ac	Standalone	Rear	No	0.561	N/A	N/A

### Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not  $> 1.20$ .

## 12 Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

**SAR<sub>1</sub>** is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

**SAR<sub>2</sub>** is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

**Ri** is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of  $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

### Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations		
Standalone	1	DTS_Ant.1	+	DTS_Ant.2
	2	U-NII_Ant.1	+	U-NII_Ant.2
	3	DTS_Ant.1	+	U-NII_Ant.2
Notes:				
<ol style="list-style-type: none"> <li>1. DTS and UNII supports Wi-Fi Direct.</li> <li>2. DTS Radio cannot transmit simultaneously with Bluetooth Radio.</li> <li>3. U-NII Radio cannot transmit simultaneously with Bluetooth Radio.</li> <li>4. Only U-NII (Ant.2) Radio can transmit simultaneously with Only DTS (Ant.1) Radio.</li> </ol>				

### Estimated SAR for Simultaneous Transmission SAR Analysis

#### Considerations for SAR estimation

1. When standalone SAR test exclusion applies, standalone SAR must also be estimated to determine simultaneous transmission SAR test exclusion.
2. Dedicated Host Approach criteria for SAR test exclusion is likewise applied to SAR estimation, with certain distinctions between test exclusion and SAR estimation:
  - When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied for SAR estimation; this is the same between test exclusion and SAR estimation calculations.
  - When the separation distance from the antenna to an adjacent edge is > 5 mm but ≤ 50 mm, the actual antenna-to-edge separation distance is applied for SAR estimation.
  - When the minimum test separation distance is > 50 mm, the estimated SAR value is 0.4 W/kg
3. Please refer to Estimated SAR Tables to see which test positions are inherently compliant as they consist of only estimated SAR values for all applicable transmitters and consequently will always have sum of SAR values < 1.2 W/kg. Simultaneous transmission SAR analysis was therefore not performed for these test positions.

#### Estimated SAR for WLAN

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Estimated 1-g SAR Value (W/kg)					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
<b>Ant.1</b>															
Wi-Fi 2.4 GHz	2462	13.00	20	0	243	20	3	122		-MEASURE-	0.400	0.209	-MEASURE-	0.400	
Wi-Fi 5.3 GHz	5320	10.00	10	0	243	20	3	122		-MEASURE-	0.400	0.154	-MEASURE-	0.400	
Wi-Fi 5.5 GHz	5720	10.00	10	0	243	20	3	122		-MEASURE-	0.400	0.159	-MEASURE-	0.400	
Wi-Fi 5.8 GHz	5825	10.00	10	0	243	20	3	122		-MEASURE-	0.400	0.161	-MEASURE-	0.400	
Bluetooth	2480	9.50	9	0	243	20	3	122		0.378	0.400	0.094	0.378	0.400	
<b>Ant.2</b>															
Wi-Fi 2.4 GHz	2462	13	20	0	243	121	3	20		-MEASURE-	0.400	0.400	-MEASURE-	0.209	
Wi-Fi 5.3 GHz	5320	10	10	0	243	121	3	20		-MEASURE-	0.400	0.400	-MEASURE-	0.154	
Wi-Fi 5.5 GHz	5720	10	10	0	243	121	3	20		-MEASURE-	0.400	0.400	-MEASURE-	0.159	
Wi-Fi 5.8 GHz	5825	10	10	0	243	121	3	20		-MEASURE-	0.400	0.400	-MEASURE-	0.161	

### 12.1 Sum of the SAR for DTS & UNII

Test Position	Standalone SAR (W/kg)				Σ 1-g SAR (W/kg)		
	DTS_Ant.1 ①	DTS_Ant.2 ②	U-NII_Ant.1 ③	U-NII_Ant.2 ④	DTS Ant.1 + DTS Ant.2 ① + ②	UNII Ant.1 + UNII Ant.2 ③ + ④	DTS Ant.1 + UNII Ant.2 ① + ④
Rear	0.472	1.065	0.755	0.521	1.537	1.276	0.993
Edge 1	0.400	0.400	0.400	0.400	0.800	0.800	0.800
Edge 2	0.209	0.400	0.161	0.400	0.609	0.561	0.609
Edge 3	0.323	0.111	0.177	0.154	0.434	0.331	0.477
Edge 4	0.400	0.209	0.400	0.161	0.609	0.561	0.561

#### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1-g SAR is < 1.6 W/kg.

## **Appendixes**

**Refer to separated files for the following appendixes.**

**4788480746-S1V1 FCC Report SAR\_App A\_Photos & Ant. Locations**

**4788480746-S1V1 FCC Report SAR\_App B\_Highest SAR Test Plots**

**4788480746-S1V1 FCC Report SAR\_App C\_System Check Plots**

**4788480746-S1V1 FCC Report SAR\_App D\_SAR Tissue Ingredients**

**4788480746-S1V1 FCC Report SAR\_App E\_Probe Cal. Certificates**

**4788480746-S1V1 FCC Report SAR\_App F\_Dipole Cal. Certificates**

**END OF REPORT**