
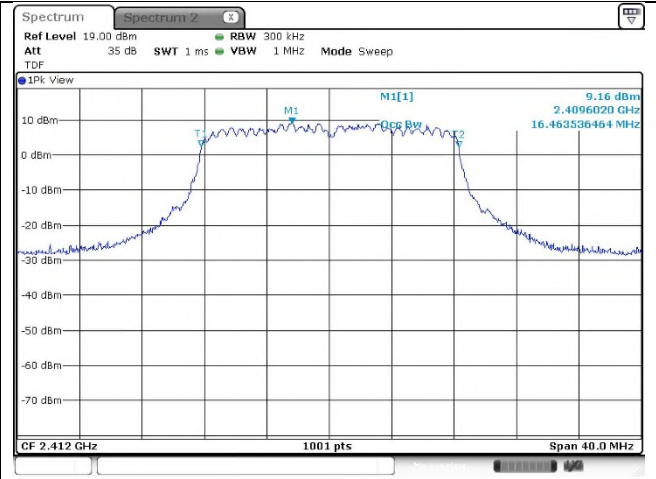


OFDM: 802.11g



Ant.1

Ant.2



Low channel

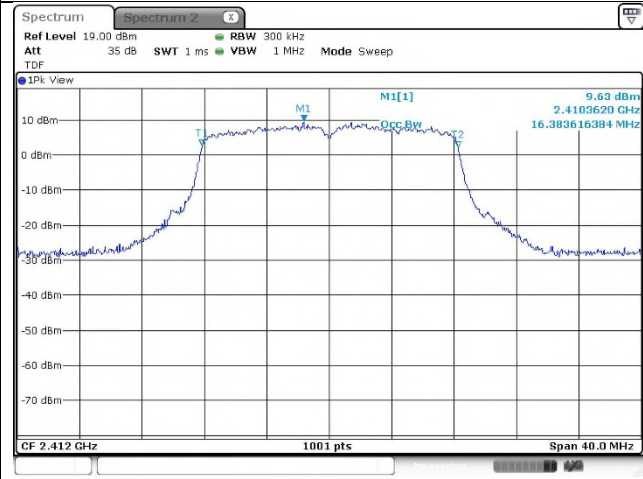



Middle channel

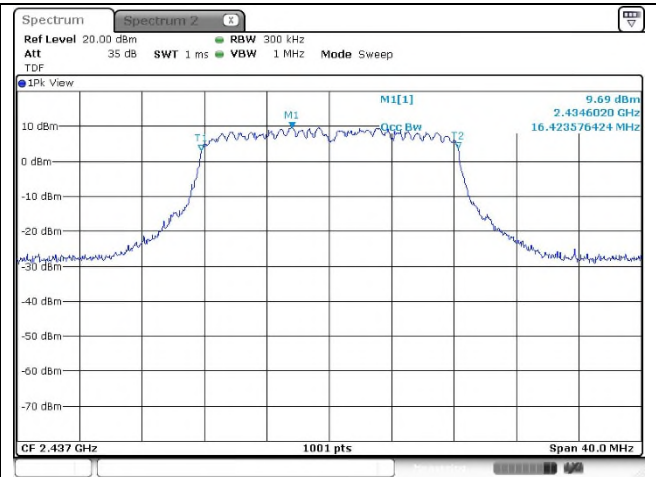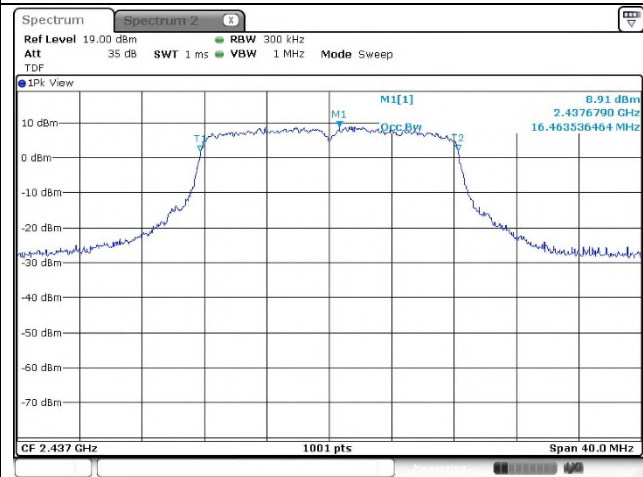



High channel

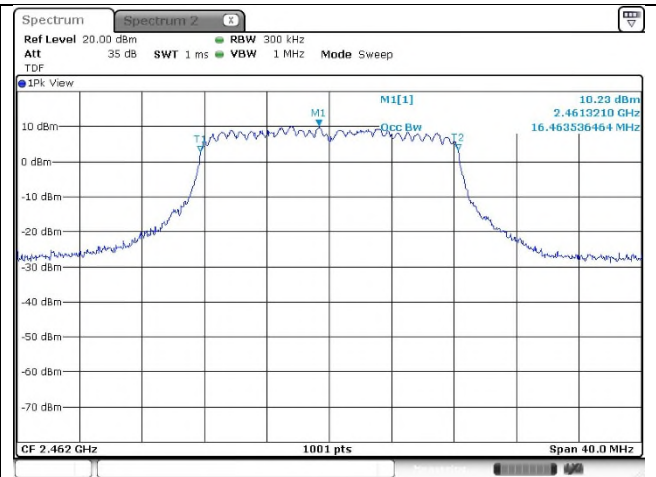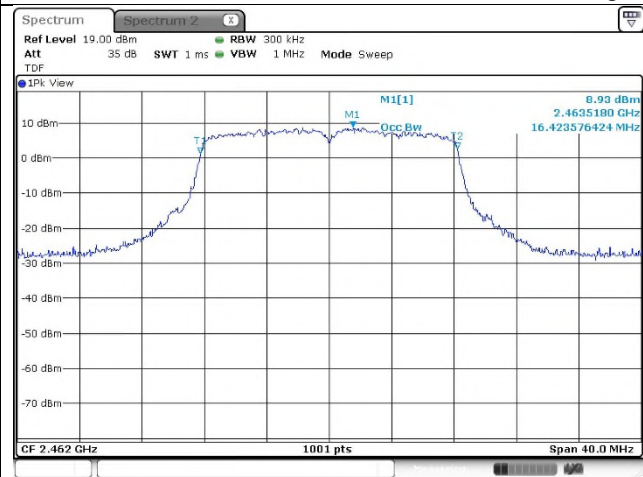

12 channel

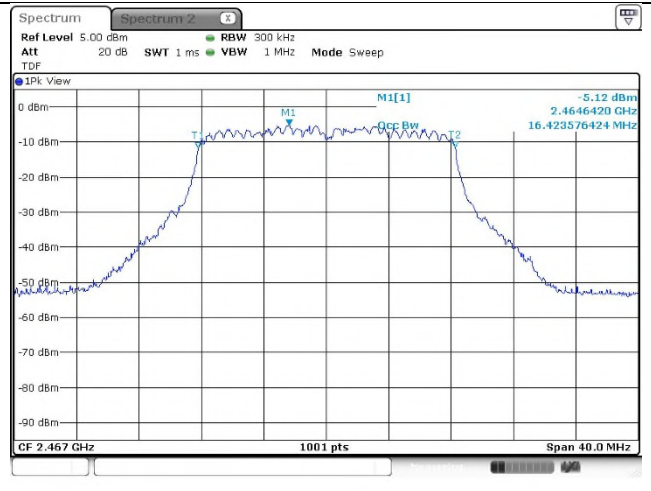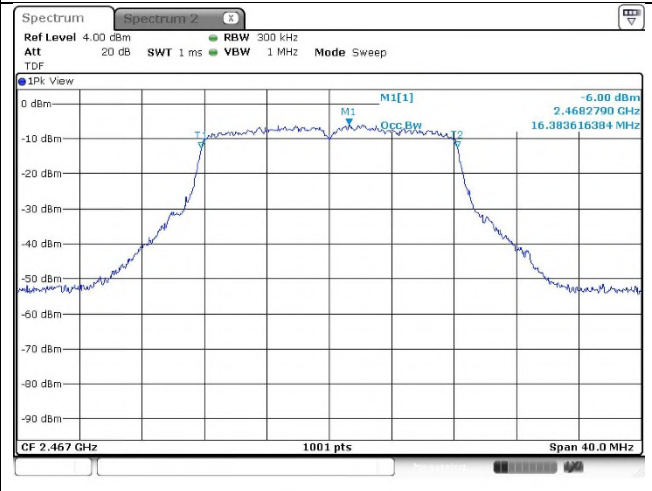

13 channel

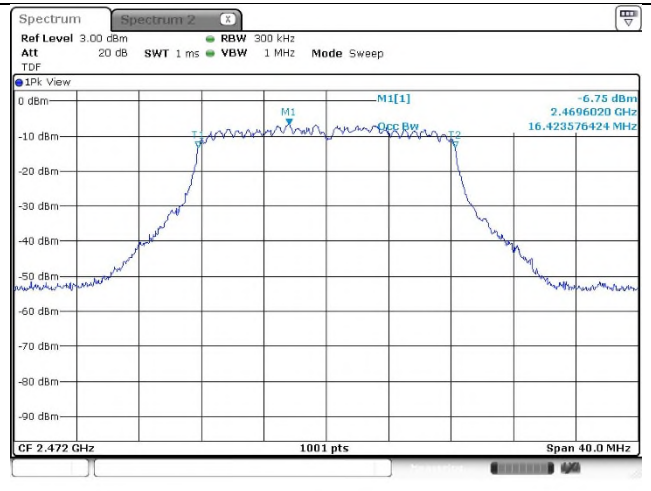
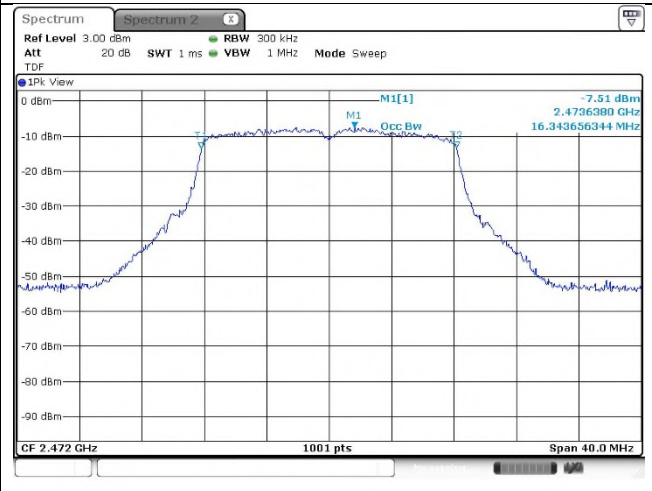


OFDM: 802.11n_HT20



Ant.1

Ant.2



Low channel

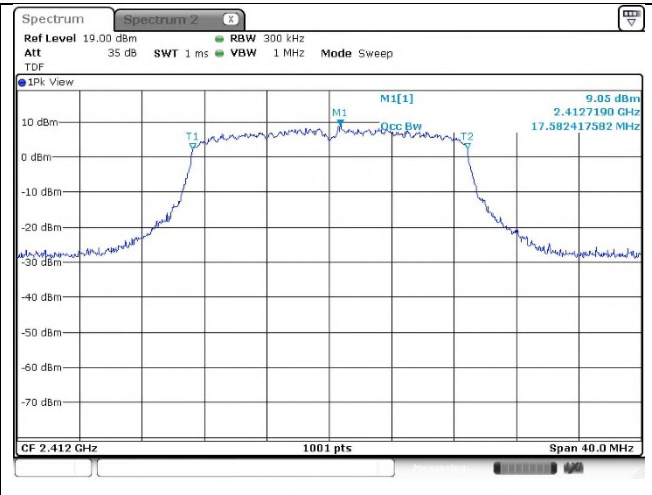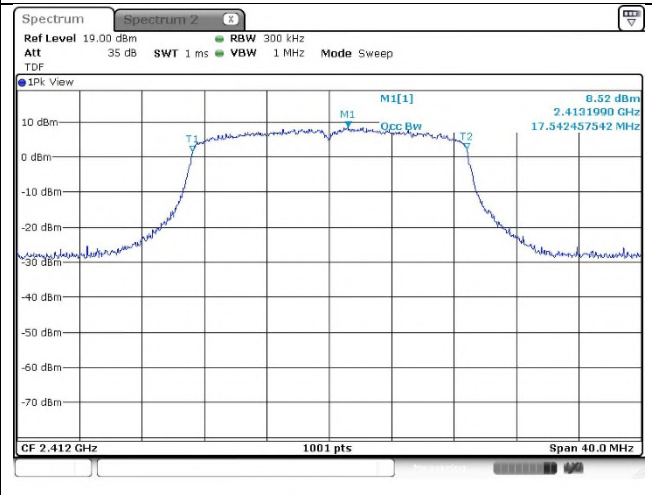



Middle channel

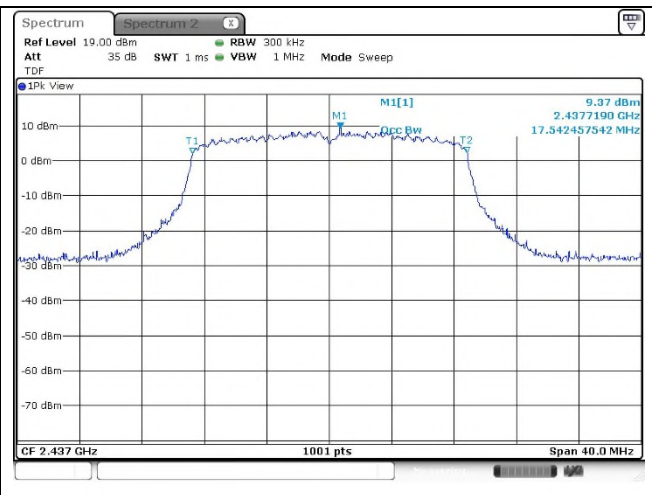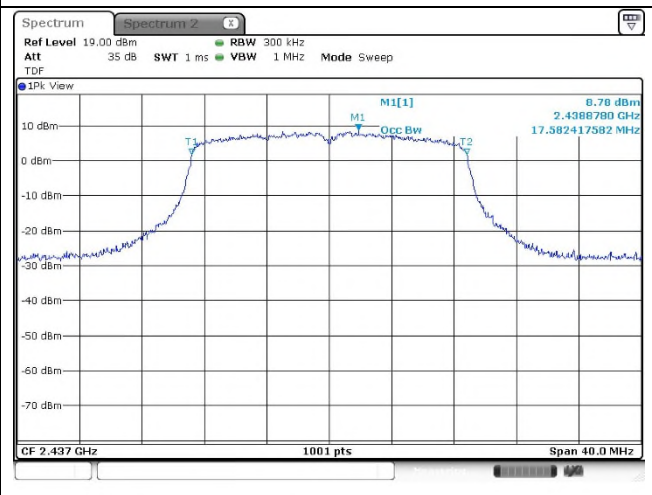



High channel

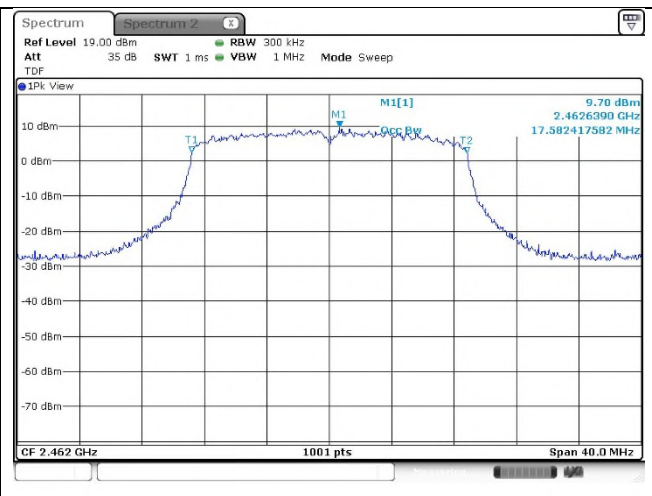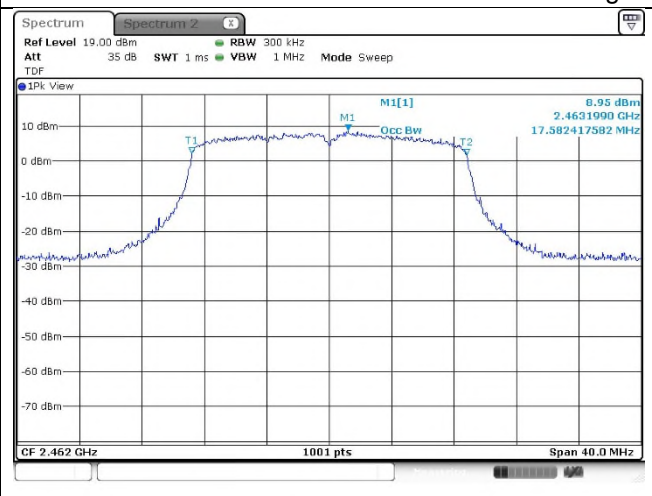

12 channel

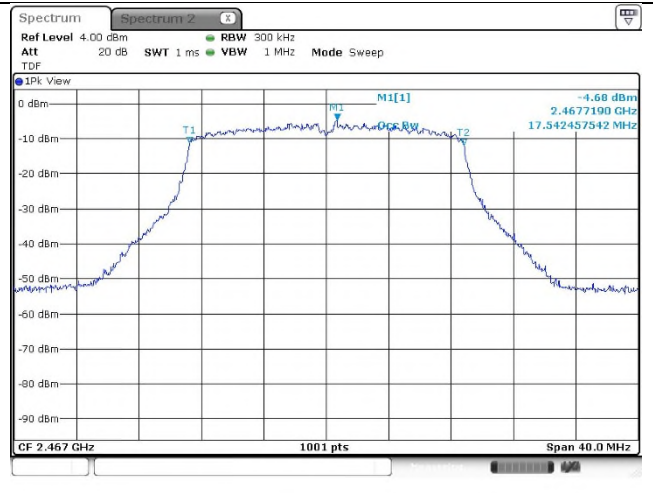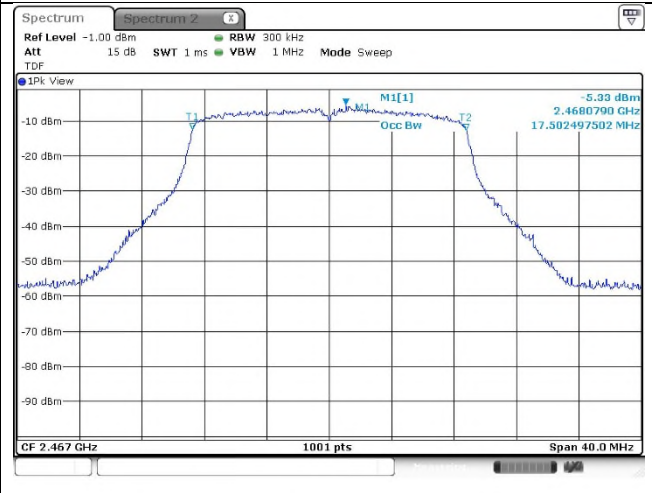


13 channel

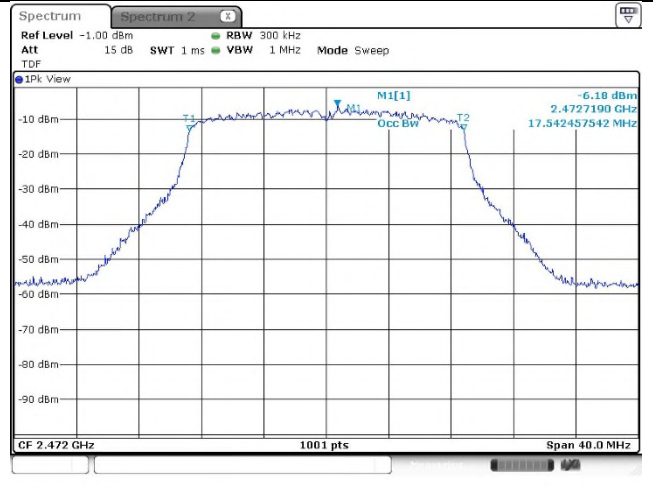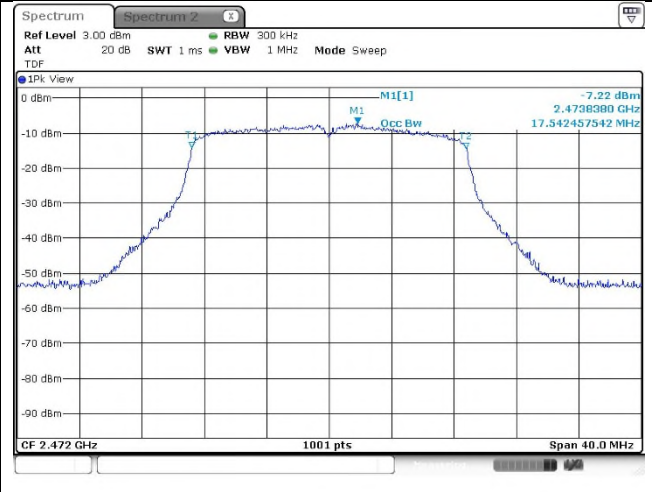

4. Maximum Peak Conducted Output Power

4.1. Test Setup

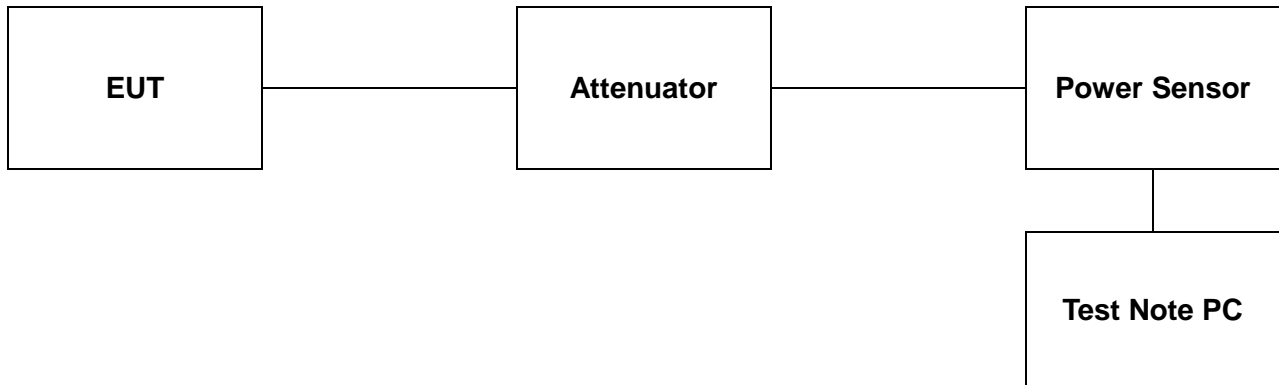

4.2. Limit

4.2.1. FCC

According to §15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2 400-2 483.5 MHz, and 5 725-5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2.2. IC

According to RSS-247 Issue 2, 5.4(d), for DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2 400-2 483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e),

As an alternative to a peak measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

4.3. Test Procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

The test follows section 11.9.1.3 of ANSI C63.10-2013.

PKPM1 Peak-reading power meter method

- The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The test follows section 11.9.2.3.2 of ANSI C63.10-2013.

Method AVGPM-G (Measurement using a gated RF average-reading power meter)

- Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

Test program: (S/W name: R&S Power Viewer, Version: 3.2.0)

1. Initially overall offset for attenuator and cable loss is measured per frequency.
2. Measured offset is inserted in test program in advance of measurement for output power.
3. Power for each frequency (channel) of device is investigated as final result.
4. Final result reported on this section from R&S power viewer program includes with several factors and test program shows only final result.

4.4. Test Results

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

SISO_Ant.1

Mode	Data Rate (Mbps)	Channel	Frequency (MHz)	Average Power Result (dB m)	Peak Power Result (dB m)	Limit (dB m)
DSSS (11b)	1	Low	2 412	19.07	21.97	30
		Middle	2 437	19.06	21.99	
		High	2 462	18.91	21.49	
		12	2 467	4.42	8.44	
		13	2 472	3.28	7.19	
OFDM (11g)	6	Low	2 412	18.09	24.94	
		Middle	2 437	18.05	24.83	
		High	2 462	17.88	24.33	
		12	2 467	4.07	10.62	
		13	2 472	2.51	9.11	
OFDM (11n_HT20)	MCS0	Low	2 412	17.22	24.13	
		Middle	2 437	17.22	24.14	
		High	2 462	16.80	23.56	
		12	2 467	2.42	9.11	
		13	2 472	1.16	7.98	

SISO_Ant.2

Mode	Data Rate (Mbps)	Channel	Frequency (MHz)	Average Power Result (dB m)	Peak Power Result (dB m)	Limit (dB m)
DSSS (11b)	1	Low	2 412	18.94	21.81	30
		Middle	2 437	18.97	21.91	
		High	2 462	19.11	22.07	
		12	2 467	4.85	8.52	
		13	2 472	3.59	7.23	
OFDM (11g)	6	Low	2 412	17.93	24.68	
		Middle	2 437	17.97	24.87	
		High	2 462	18.12	24.82	
		12	2 467	4.91	11.30	
		13	2 472	3.81	10.29	
OFDM (11n_HT20)	MCS0	Low	2 412	16.85	23.71	
		Middle	2 437	17.23	24.12	
		High	2 462	17.24	24.19	
		12	2 467	5.21	11.71	
		13	2 472	3.93	10.59	

MIMO

Mode	Data Rate (Mbps)	Channel	Frequency (MHz)	Average Power Result (dB m)			Limit (dB m)
				Ant.1	Ant.2	Ant.1+Ant.2	
DSSS (11b)	1	Low	2 412	18.78	18.84	21.82	30
		Middle	2 437	19.03	18.68	21.87	
		High	2 462	18.56	18.76	21.67	
		12	2 467	2.34	2.95	5.67	
		13	2 472	-6.91	-7.82	-4.33	
OFDM (11g)	6	Low	2 412	18.02	18.05	21.05	
		Middle	2 437	18.02	18.09	21.07	
		High	2 462	17.78	18.22	21.02	
		12	2 467	1.71	2.53	5.15	
		13	2 472	0.47	0.97	3.74	
OFDM (11n_HT20)	MCS0	Low	2 412	17.18	17.02	20.11	
		Middle	2 437	17.21	17.24	20.24	
		High	2 462	16.80	17.37	20.10	
		12	2 467	1.39	2.24	4.85	
		13	2 472	0.15	0.59	3.39	

Mode	Data Rate (Mbps)	Channel	Frequency (MHz)	Peak Power Result (dB m)			Limit (dB m)
				Ant.1	Ant.2	Ant.1+Ant.2	
DSSS (11b)	1	Low	2 412	21.75	21.54	24.66	30
		Middle	2 437	21.49	21.50	24.51	
		High	2 462	21.33	21.65	24.50	
		12	2 467	6.41	6.62	9.53	
		13	2 472	0.35	-3.72	1.79	
OFDM (11g)	6	Low	2 412	24.79	24.57	27.69	
		Middle	2 437	24.58	24.89	27.75	
		High	2 462	24.31	24.70	27.52	
		12	2 467	8.22	8.99	11.63	
		13	2 472	7.19	7.39	10.30	
OFDM (11n_HT20)	MCS0	Low	2 412	24.15	23.69	26.94	
		Middle	2 437	24.03	24.13	27.09	
		High	2 462	23.49	24.16	26.85	
		12	2 467	8.16	8.92	11.57	
		13	2 472	7.04	7.19	10.13	

Remark;

According to KDB 662911 D01 v02r01, Average/Peak power of each port (Ant.1+Ant.2) was combined by using below calculation.

Average/Peak power: $10 \log \{10^{(\text{Ant.1 power} / 10)} + 10^{(\text{Ant.2 power} / 10)}\}$

5. Power Spectral Density

5.1. Test Setup



5.2. Limit

5.2.1 FCC

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.2.2 IC

According to RSS-247 Issue 2, 5.2(b), the transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

5.3. Test Procedure

All data rates and modes were investigated for this test. The full data for the worst case data rate are reported in this section.

The measurements are recorded using the PKPSD measurement procedure in section 11.10.2 of ANSI C63.10-2013.

- This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

5.4. Test Results

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

Mode	Data Rate (Mbps)	Channel	Frequency (MHz)	Measured PSD (dB m/3 kHz)			Limit (dB m/3 kHz)
				Ant.1	Ant.2	Ant.1+Ant.2	
DSSS (11b)	1	Low	2 412	-7.70	-7.79	-4.73	8
		Middle	2 437	-6.48	-8.24	-4.26	
		High	2 462	-6.36	-7.90	-4.05	
		12	2 467	-23.75	-23.57	-20.65	
		13	2 472	-33.74	-35.37	-31.47	
OFDM (11g)	6	Low	2 412	-6.63	-7.23	-3.91	
		Middle	2 437	-7.05	-7.35	-4.19	
		High	2 462	-6.82	-5.86	-3.30	
		12	2 467	-24.18	-24.12	-21.14	
		13	2 472	-22.83	-24.21	-20.46	
OFDM (11n_HT20)	MCS0	Low	2 412	-5.46	-6.56	-2.96	
		Middle	2 437	-5.84	-6.61	-3.20	
		High	2 462	-6.03	-6.25	-3.13	
		12	2 467	-24.05	-23.48	-20.75	
		13	2 472	-23.97	-25.42	-21.62	

Remark;

According to KDB 662911 D01 v02r01, power spectral density of each port (Ant.1 + Ant.2) was combined by using below calculation.

PSD: $10 \log \{10^{(Ant.1 \text{ PSD} / 10)} + 10^{(Ant.2 \text{ PSD} / 10)}\}$



- Test plots

DSSS: 802.11b



Ant.1

Ant.2



Low channel

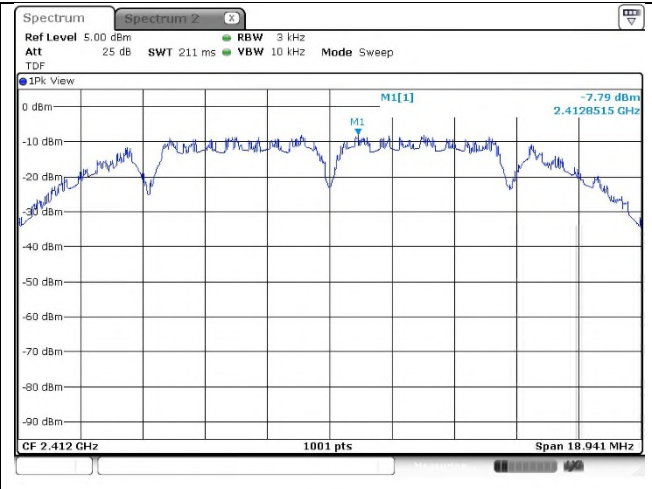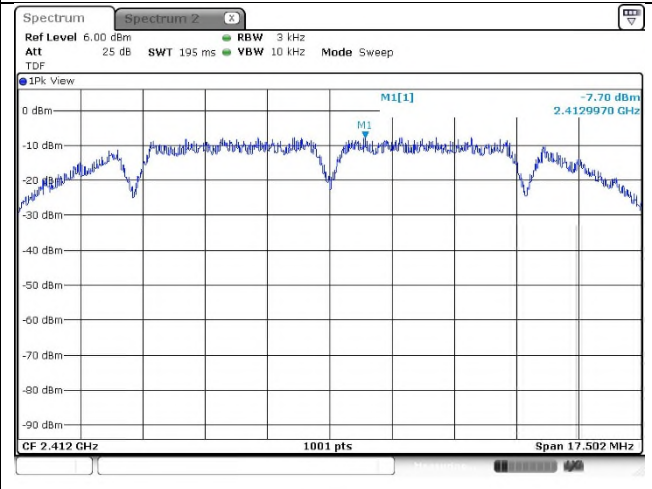


Middle channel

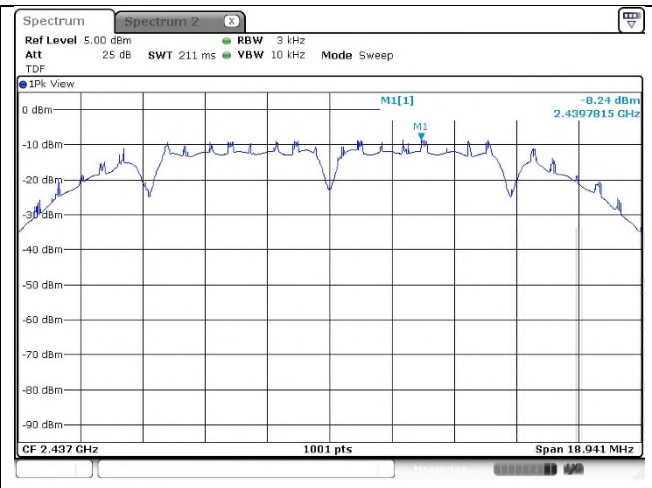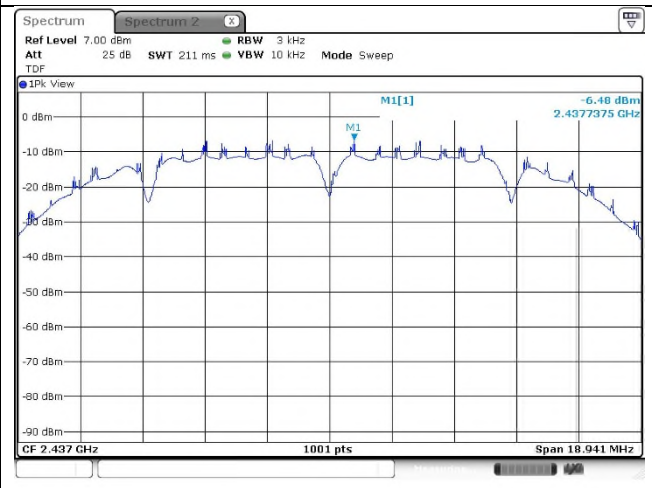

High channel

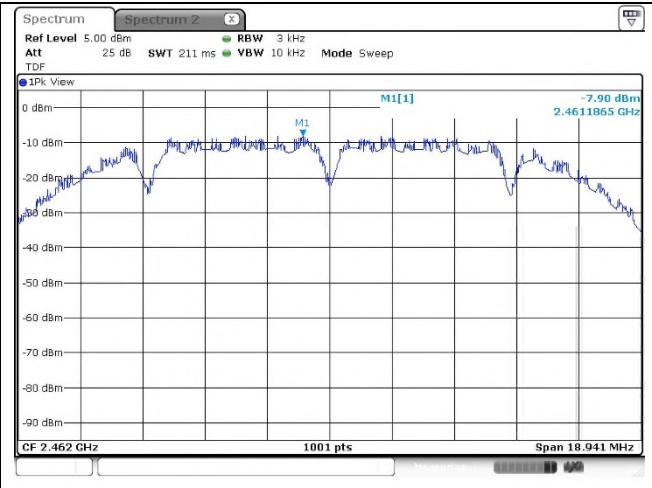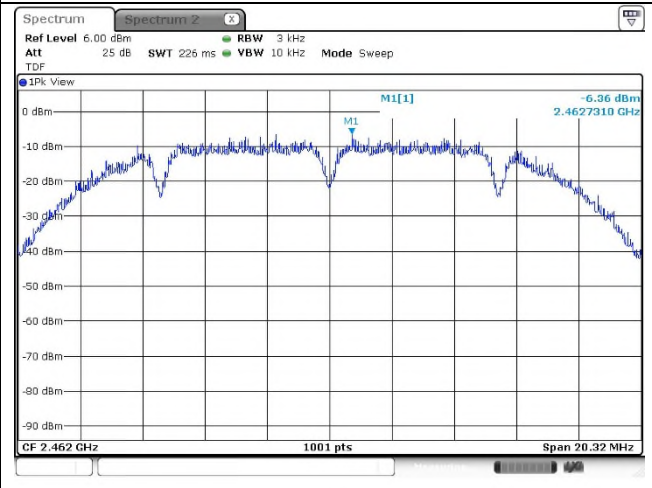


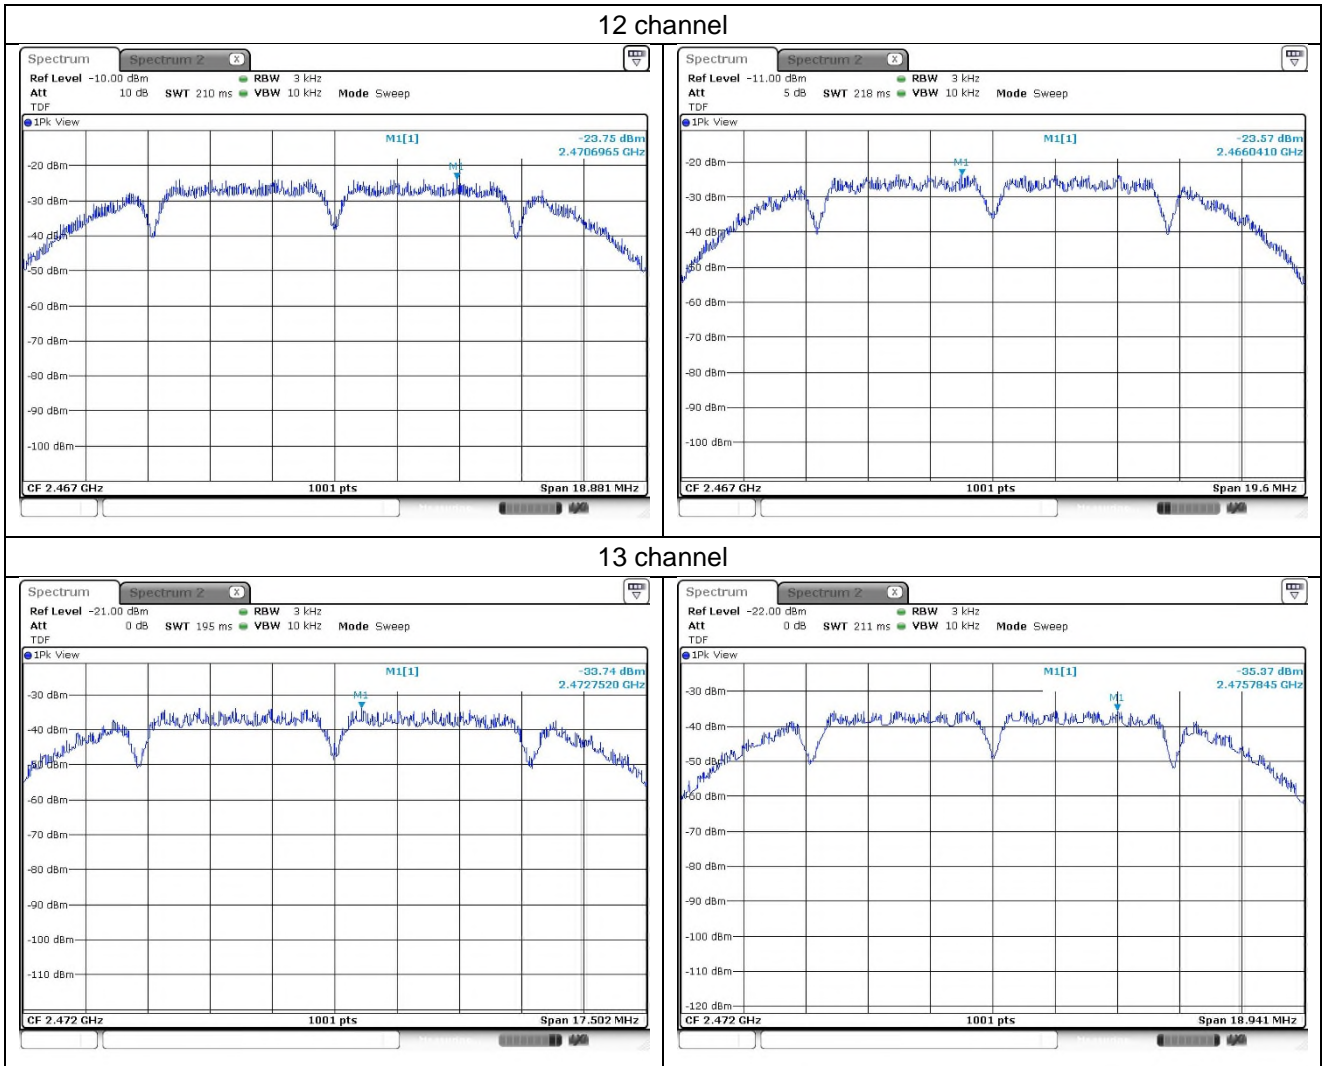


OFDM: 802.11g



Ant.1

Ant.2



Low channel

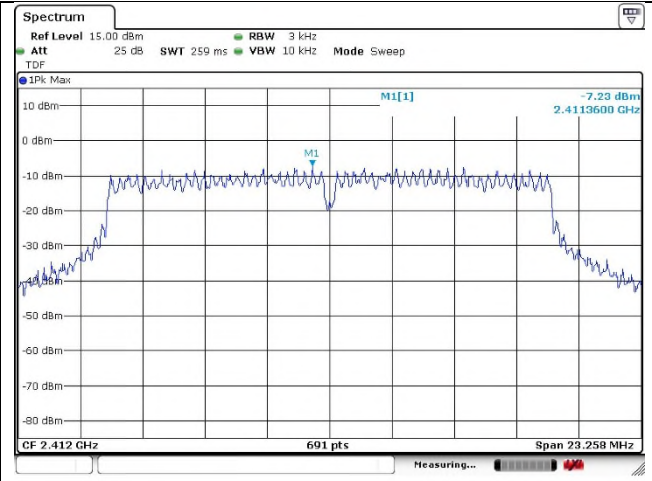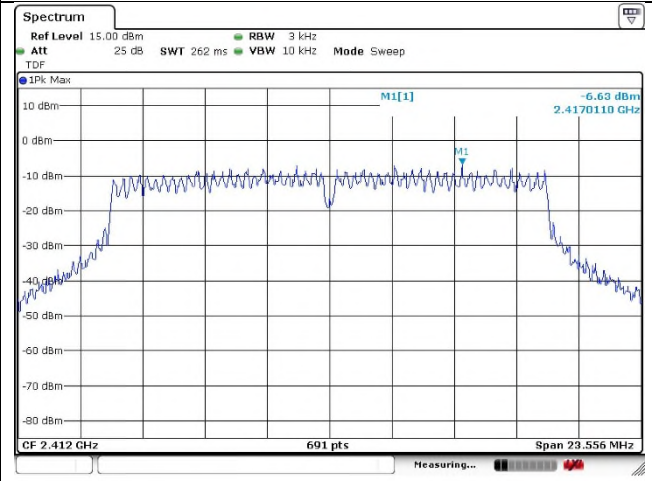



Middle channel

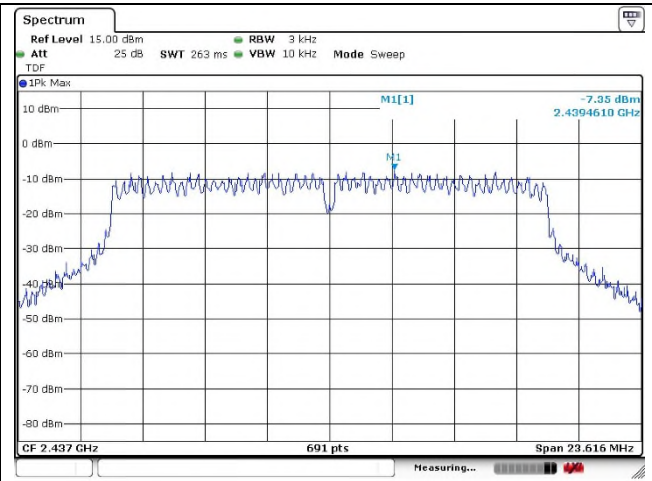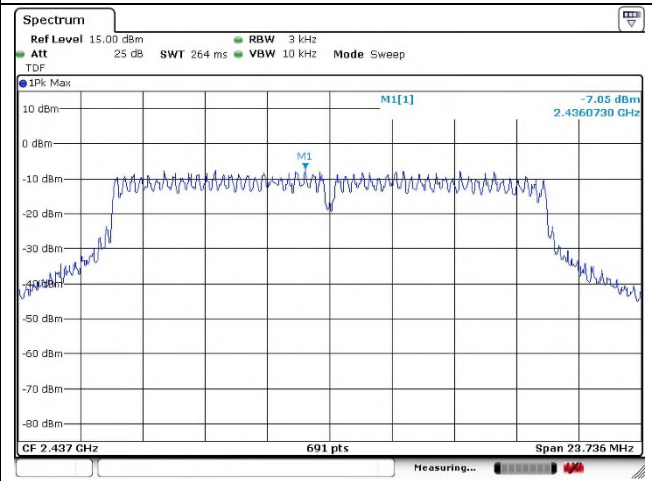



High channel

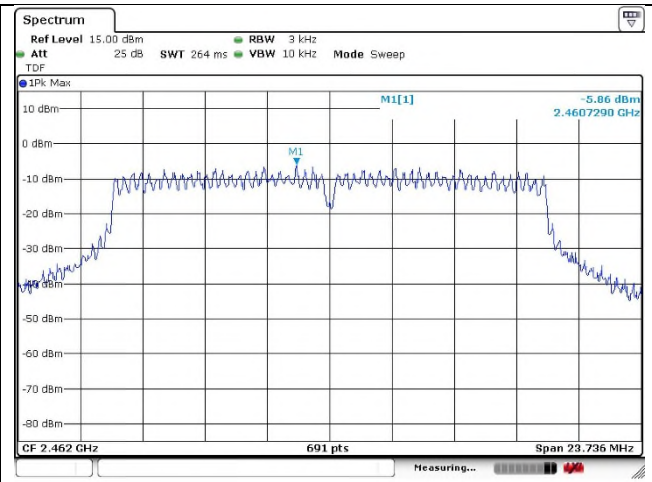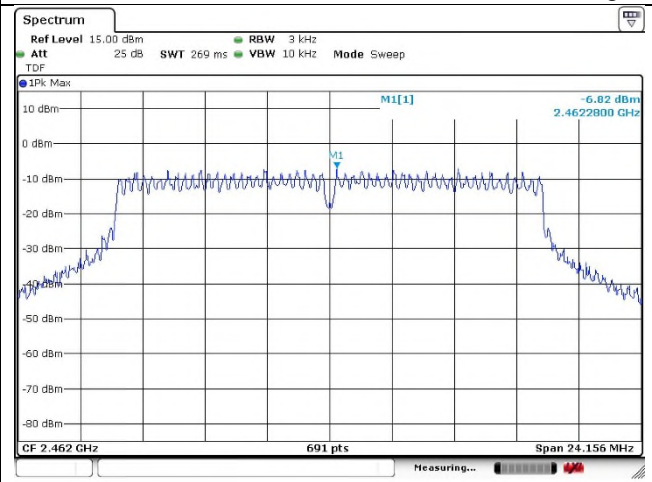

12 channel

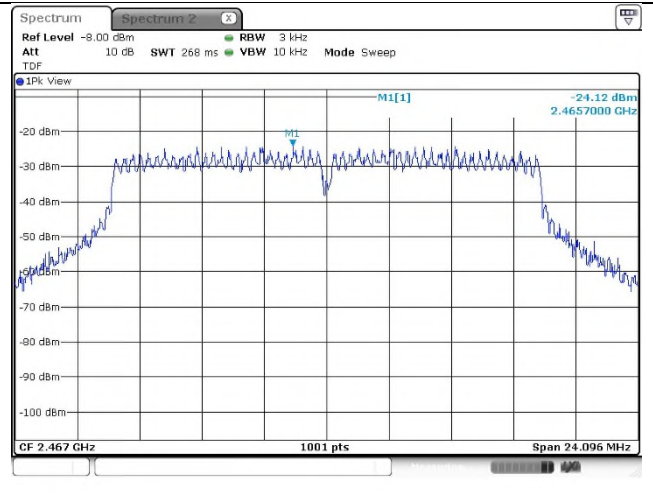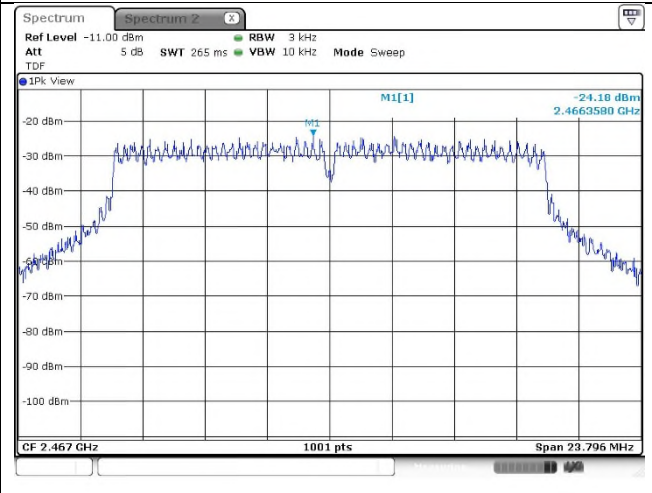

13 channel

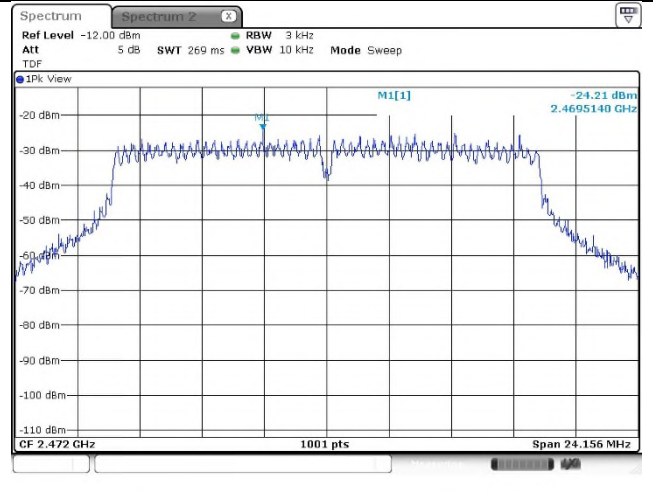
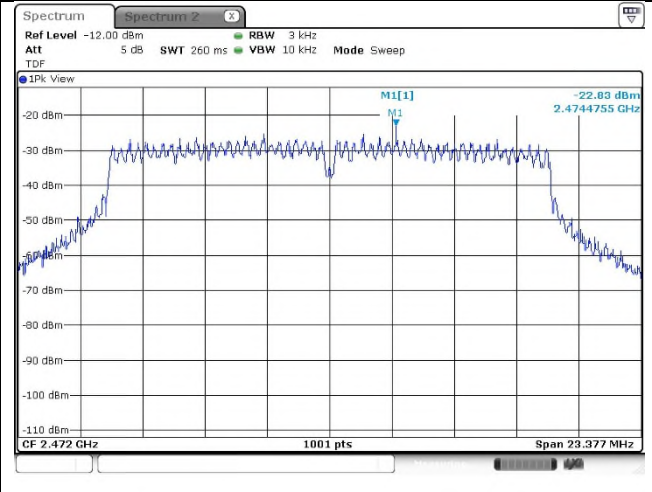


OFDM: 802.11n_HT20



Ant.1

Ant.2



Low channel

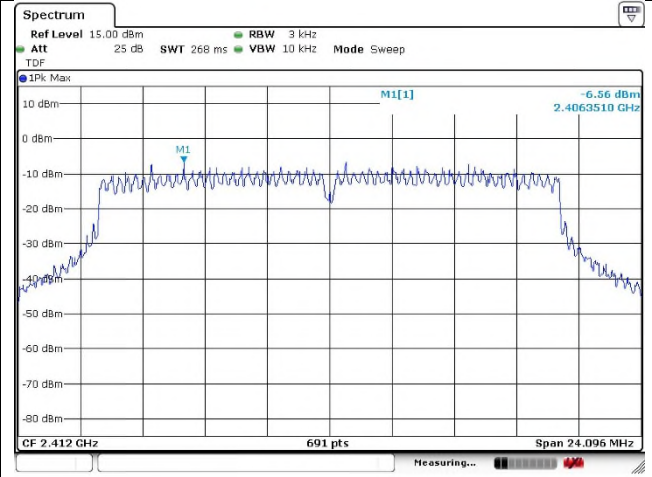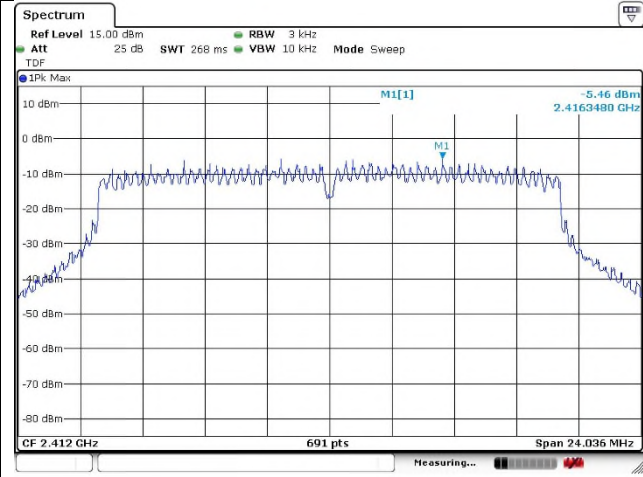


Middle channel

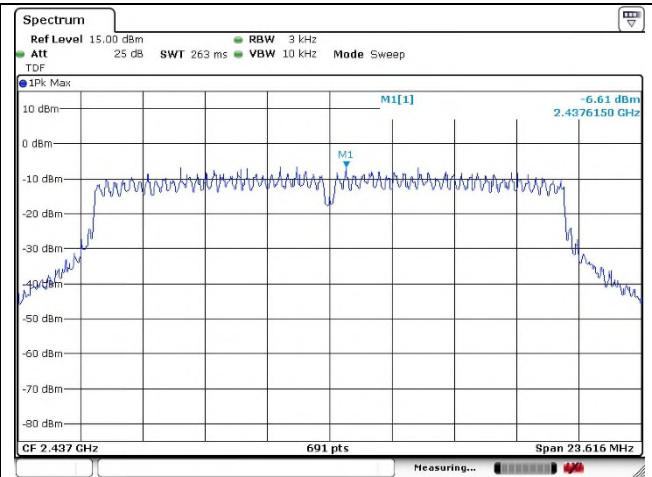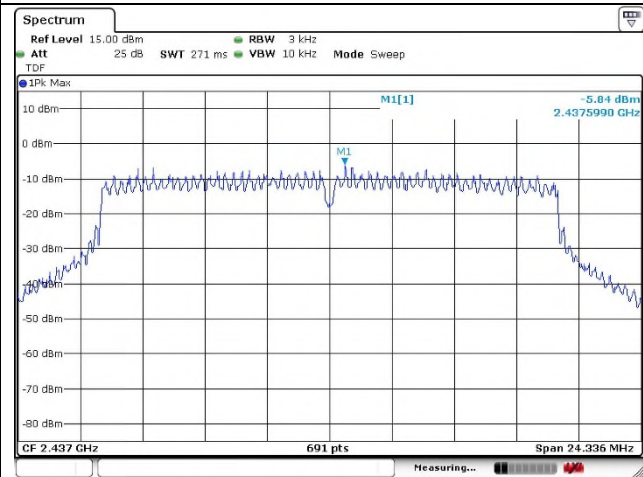


High channel

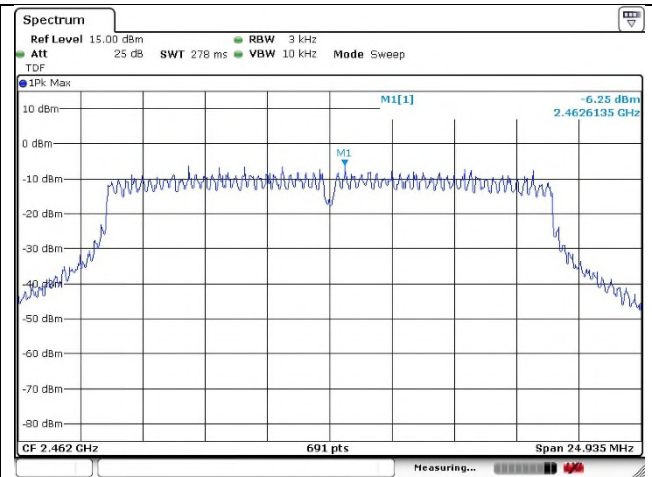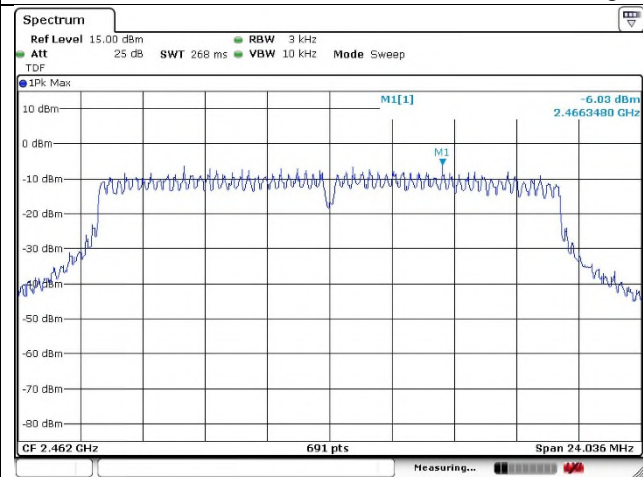

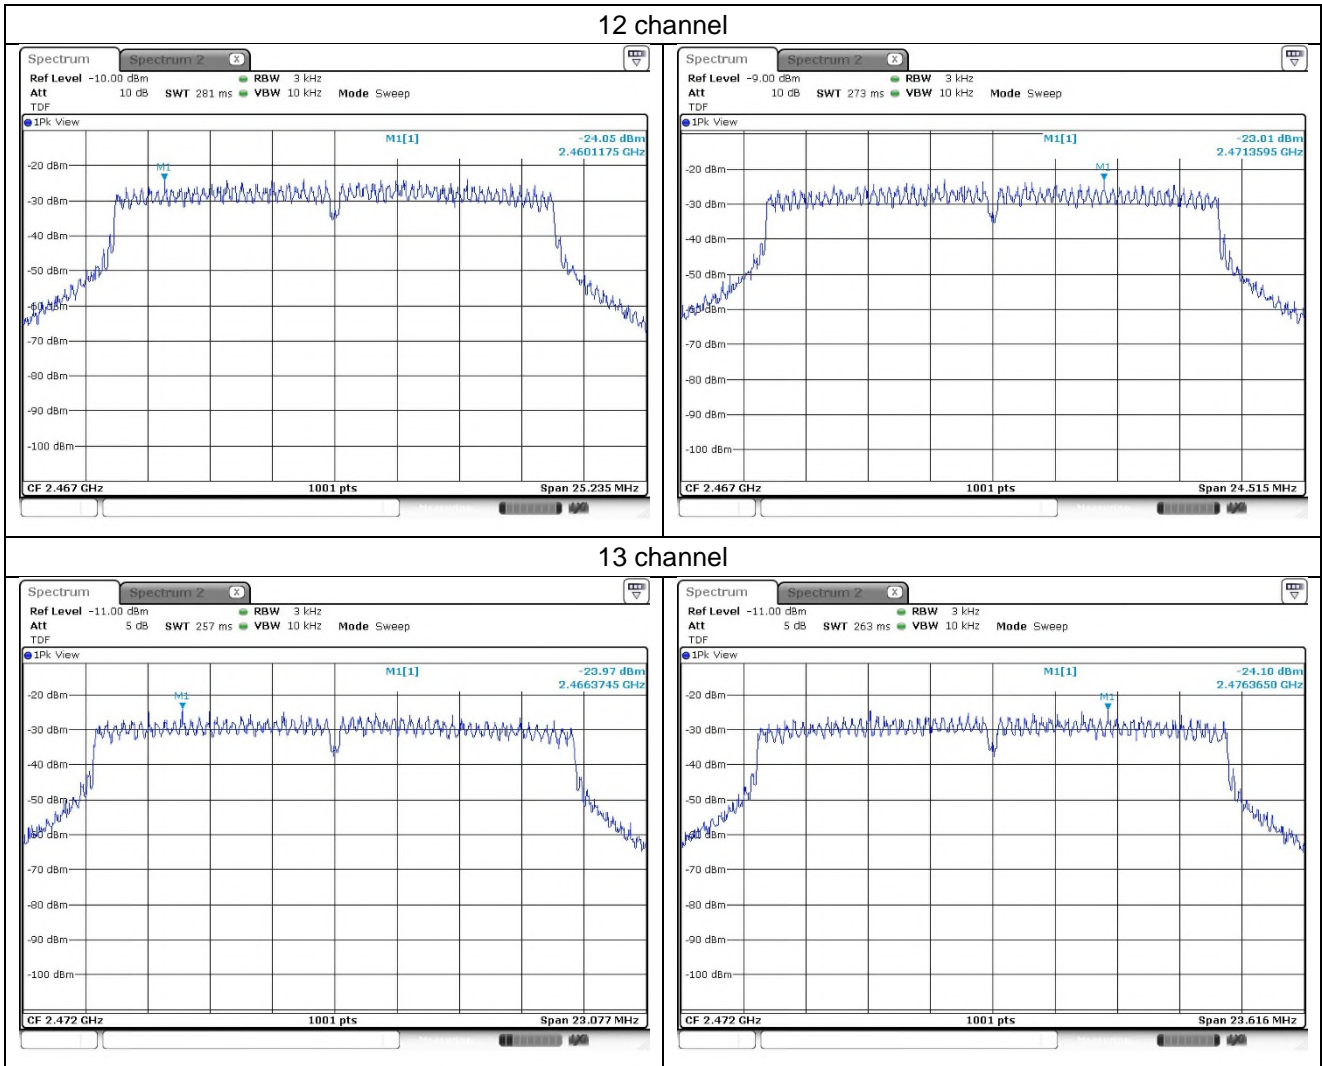

6. Transmitter AC Power Line Conducted Emission

6.1. Test Setup

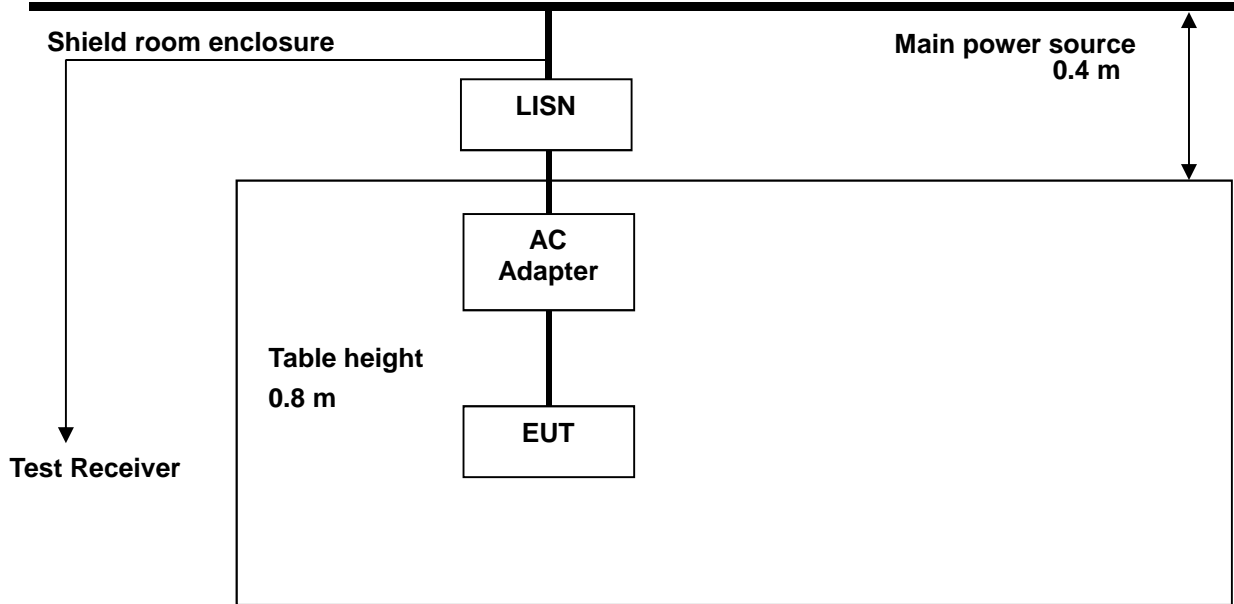

6.2. Limit

6.2.1. FCC

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH / 50 ohms line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

6.2.2. IC

RSS-Gen Issue 5, 8.8, Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μH / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

Table 4 - AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 ¹	56 to 46 ¹
0.5-5	56	46
5-30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

- (a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.
- (b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

6.3. Test Procedures

AC conducted emissions from the EUT were measured according to the dictates of ANSI C63.10-2013

1. The test procedure is performed in a 6.5 m × 3.5 m × 3.5 m (L × W × H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) × 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

6.4. Test Results

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line.

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

Frequency range : 0.15 MHz - 30 MHz
 Measured Bandwidth : 9 kHz


FREQ. (MHz)	LEVEL (dB μ V)		LINE	LIMIT (dB μ V)		MARGIN (dB)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.16	47.30	33.10	N	65.46	55.46	18.16	22.36
0.63	37.50	26.30	N	56.00	46.00	18.50	19.70
1.17	33.10	18.80	N	56.00	46.00	22.90	27.20
3.92	41.20	25.50	N	56.00	46.00	14.80	20.50
8.83	36.10	21.90	N	60.00	50.00	23.90	28.10
12.97	43.70	29.10	N	60.00	50.00	16.30	20.90
0.23	41.60	29.40	H	62.45	52.45	20.85	23.05
0.71	38.60	29.60	H	56.00	46.00	17.40	16.40
1.16	33.50	26.10	H	56.00	46.00	22.50	19.90
2.80	35.70	22.60	H	56.00	46.00	20.30	23.40
3.75	40.70	26.40	H	56.00	46.00	15.30	19.60
12.69	40.10	25.40	H	60.00	50.00	19.90	24.60

Remark;


1. Line (H): Hot, Line (N): Neutral.
2. All data rates and modes of operation were investigated and the worst-case emissions were reported using **11g(MIMO) / 6Mbps / Middle channel.**
3. The limit for Class B device(s) from 150 kHz to 30 MHz are specified in Section of the Title 47 CFR.
4. Traces shown in plot were made by using a peak detector and average detector.
5. Deviations to the Specifications: None.

- Test plots

Test mode: (Neutral)

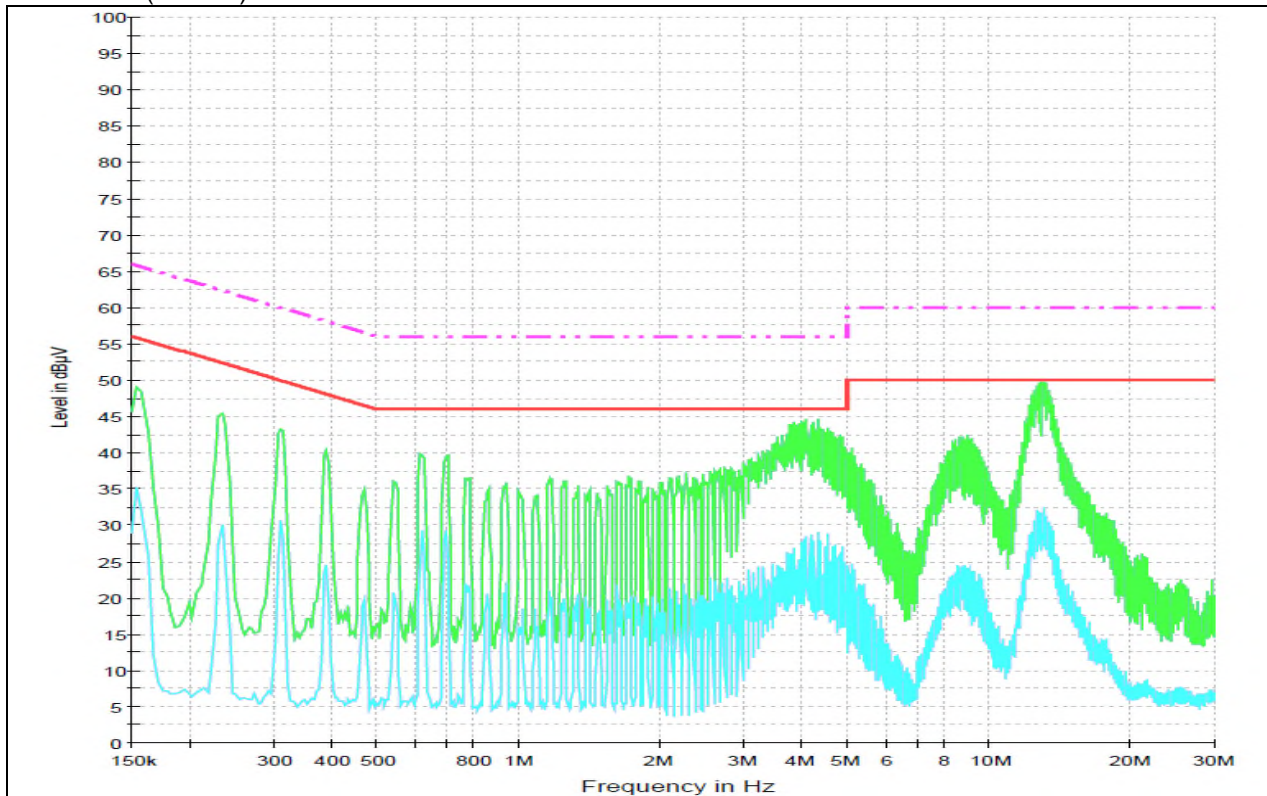

Test mode: (Hot)

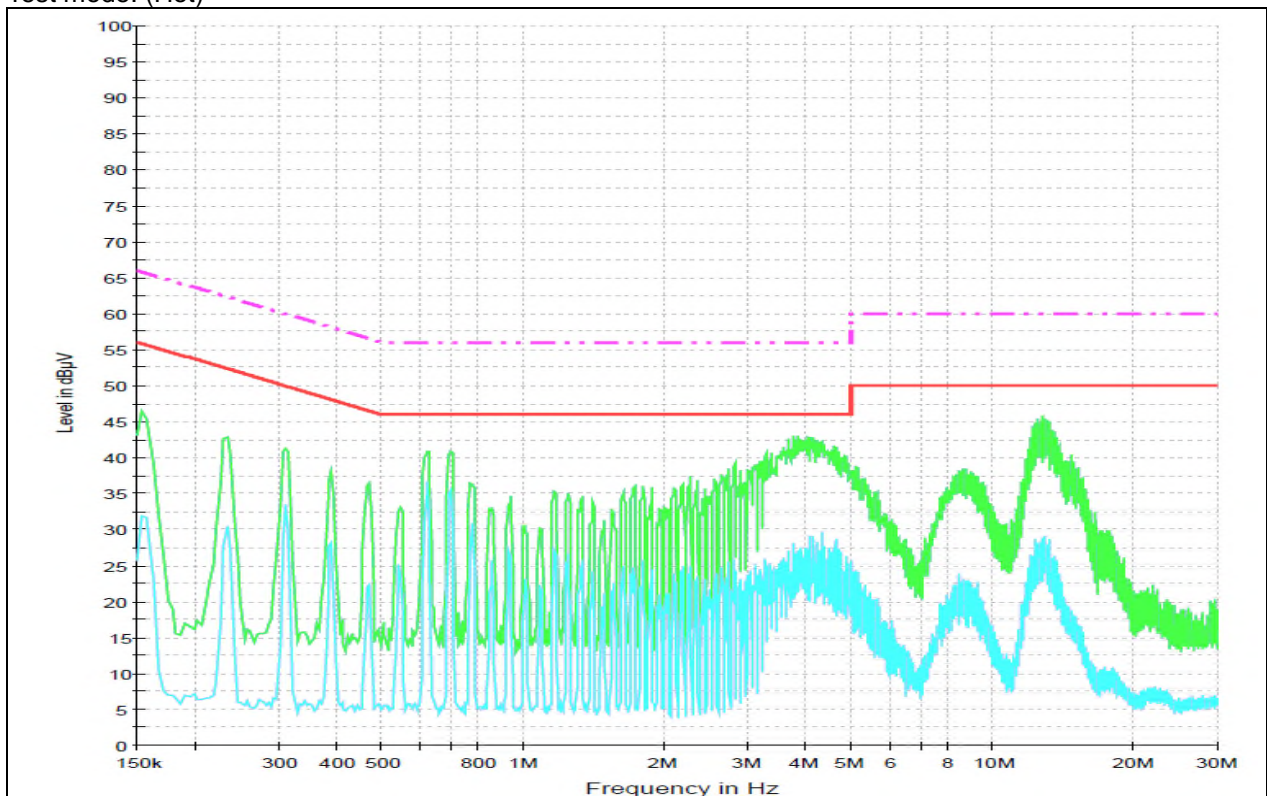

7. Antenna Requirement

7.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247(b) if transmitting antennas of directional gain greater than 6 dB i are used, the power shall be reduced by the amount in dB that the gain of the antenna exceeds 6 dB i.

7.2. Antenna Connected Construction

Antenna used in this product is Metal Frame Antenna and peak max gain of antenna as below.

Band	2 400 MHz ~ 2 483.5 MHz
Mode	11b/g/n_HT20, 11ac_VHT20
Ant.1 Gain	-5.10 dB i
Ant.2 Gain	-4.80 dB i
Ant.1 + Ant.2 Gain	-1.94 dB i

Unequal antenna gains, with equal transmit powers. For antenna gains given by G_1, G_2, \dots, G_N dB i

(i) If transmit signals are correlated, then

Directional gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dB i [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

- End of the Test Report -