

# FCC LTE REPORT

## Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Date of Issue:**  
July 15, 2020

**Address:**  
129, Samsung-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Location:**  
HCT CO., LTD.,  
74, Seoicheon-ro 578beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA  
**Report No.:** HCT-RF-2007-FC030

**FCC ID:** A3LSMT878U

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

Model(s): SM-T878U  
 EUT Type: Tablet  
 FCC Classification: PCS Licensed Transmitter (PCB)  
 FCC Rule Part(s): §27, §2

	Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
					Max. Power (W)	Max. Power (dBm)
Power Class 3	LTE – Band 41 (5)	2498.5 – 2687.5	4M50G7D	QPSK	0.287	24.58
			4M48W7D	16QAM	0.222	23.46
			4M51W7D	64QAM	0.186	22.70
			4M50W7D	256QAM	0.099	19.95
	LTE – Band 41 (10)	2501.0 – 2685.0	8M95G7D	QPSK	0.272	24.35
			8M96W7D	16QAM	0.216	23.35
			8M97W7D	64QAM	0.185	22.67
			8M97W7D	256QAM	0.095	19.79
	LTE – Band 41 (15)	2503.5 – 2682.5	13M4G7D	QPSK	0.276	24.41
			13M5W7D	16QAM	0.219	23.41
			13M4W7D	64QAM	0.181	22.58
			13M5W7D	256QAM	0.093	19.70
	LTE – Band 41 (20)	2506.0 – 2680.0	18M0G7D	QPSK	0.239	23.79
			17M9W7D	16QAM	0.189	22.77
			17M9W7D	64QAM	0.165	22.18
			17M9W7D	256QAM	0.090	19.53
Power Class 2	LTE – Band 41 (5)	2498.5 – 2687.5	4M50G7D	QPSK	0.692	28.40
			4M51W7D	16QAM	0.569	27.55
			4M50W7D	64QAM	0.425	26.28
			4M49W7D	256QAM	0.228	23.57
	LTE – Band 41 (10)	2501.0 – 2685.0	8M97G7D	QPSK	0.683	28.34
			8M94W7D	16QAM	0.588	27.69
			8M95W7D	64QAM	0.392	25.93
			8M95W7D	256QAM	0.216	23.34
	LTE – Band 41 (15)	2503.5 – 2682.5	13M4G7D	QPSK	0.660	28.19
			13M5W7D	16QAM	0.539	27.31
			13M4W7D	64QAM	0.361	25.57
			13M4W7D	256QAM	0.218	23.39
	LTE – Band 41 (20)	2506.0 – 2680.0	17M9G7D	QPSK	0.673	28.28
			17M9W7D	16QAM	0.569	27.55
			17M9W7D	64QAM	0.364	25.61
			17M9W7D	256QAM	0.210	23.22

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report No.: HCT-RF-2007-FC030

---

REVIEWED BY



---

Report prepared by : Se Wook Park  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

This test results were applied only to the test methods required by the standard.

**This laboratory is not accredited for the test results marked \*.**

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2007-FC030	July 15, 2020	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Table of Contents

REVIEWED BY .....	2
1. GENERAL INFORMATION .....	6
2. INTRODUCTION .....	7
2.1. DESCRIPTION OF EUT .....	7
2.2. MEASURING INSTRUMENT CALIBRATION .....	7
2.3. TEST FACILITY .....	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE .....	8
3.2 RADIATED POWER.....	9
3.3 RADIATED SPURIOUS EMISSIONS .....	10
3.4 PEAK- TO- AVERAGE RATIO.....	11
3.5 OCCUPIED BANDWIDTH. ....	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	14
3.7 CHANNEL EDGE .....	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	17
3.9 WORST CASE(RADIATED TEST) .....	18
3.10 WORST CASE(CONDUCTED TEST) .....	19
4. LIST OF TEST EQUIPMENT .....	20
5. MEASUREMENT UNCERTAINTY .....	22
6. SUMMARY OF TEST RESULTS .....	23
7. SAMPLE CALCULATION .....	24
8. TEST DATA .....	26
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	26
8.1.1 Power Class 3 .....	26
8.1.2 Power Class 2 .....	28
8.2 RADIATED SPURIOUS EMISSIONS .....	30
8.2.1 Power Class 3 .....	30
8.2.2 Power Class 2 .....	34
8.3 PEAK-TO-AVERAGE RATIO.....	38
8.3.1 Power Class 3 .....	38
8.3.2 Power Class 2 .....	39
8.4 OCCUPIED BANDWIDTH .....	40
8.4.1 Power Class 3 .....	40
8.4.2 Power Class 2 .....	41
8.5 CONDUCTED SPURIOUS EMISSIONS .....	42
8.5.1 Power Class 3 .....	42
8.5.2 Power Class 2 .....	43

**8.6 CHANNEL EDGE ..... 44**

**8.6.1 Power Class 3 ..... 44**

**8.6.2 Power Class 2 ..... 45**

**8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE ..... 46**

**8.7.1 Power Class 3 ..... 46**

**8.7.2 Power Class 2 ..... 58**

**9. TEST PLOTS..... 70**

**10. ANNEX A\_ TEST SETUP PHOTO..... 247**

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMT878U
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter (PCB)
<b>FCC Rule Part(s):</b>	§27, §2
<b>EUT Type:</b>	Tablet
<b>Model(s):</b>	SM-T878U
<b>Tx Frequency:</b>	2498.5 – 2687.5 : 5 MHz 2501.0 – 2685.0 : 10 MHz 2503.5 – 2682.5 : 15 MHz 2506.0 – 2680.0 : 20 MHz
<b>Date(s) of Tests:</b>	June 07, 2020 ~ July 13, 2020

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Tablet with UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (HT20/40/80), Bluetooth, BT LE, WPT, mmWave(n260/261).

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12



## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed NormalHz
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $> 2 \times$  span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.  
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100kHz for emissions below 1GHz and NormalHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundalmatal frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

### 3.4 PEAK- TO- AVERAGE RATIO

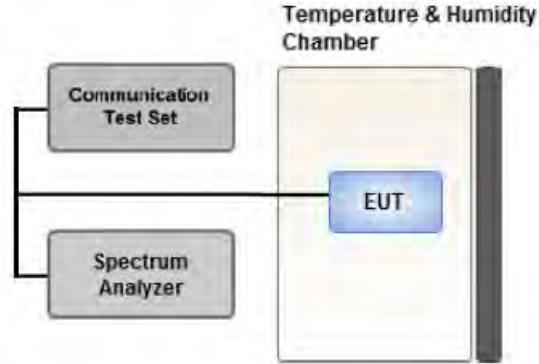

**Test setup**

① CCDF Procedure for PAPR

**Test Settings**

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - for continuous transmissions, set to 1 ms,
  - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{PK}$ .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{PK} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

**Test Settings(Peak Power)**


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

**Test Settings(Average Power)**

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
  
Set  $\geq [10 \times$  (number of points in sweep)  $\times$  (transmission period)] for single sweep  
  
(automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6$  dB if the duty cycle is a constant 25%.

### 3.5 OCCUPIED BANDWIDTH.

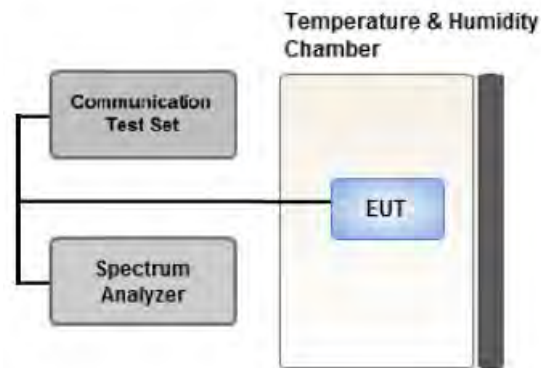

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

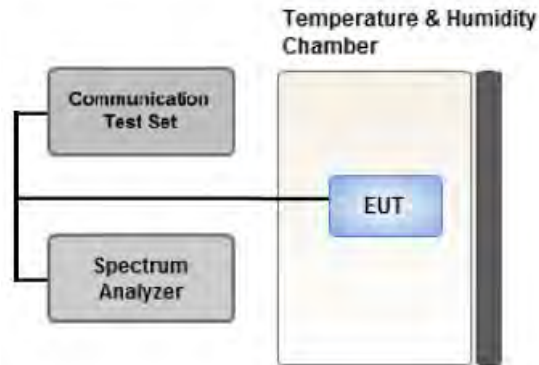

**Test setup**


#### **Test Overview**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

### 3.7 CHANNEL EDGE

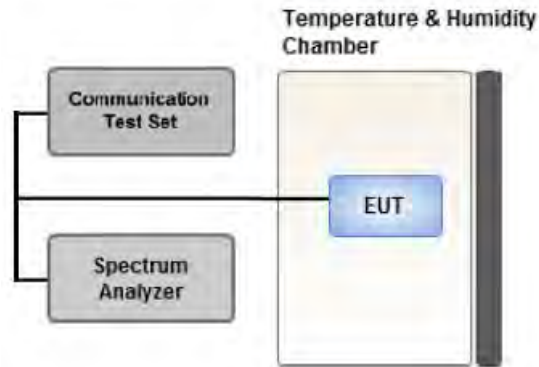

**Test setup**

#### **Test Overview**

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**


1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1MHz of the channel edge the RBW should be 2% of EBW, then 1 MHz after that.
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

**Test Notes**

1. The attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,
2.  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge.
3.  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge.
4. The attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz.
5.  $55 + 10 \log (P)$  dB at or below 2490.5 MHz.
6. X is the greater of 6MHz or the actual emission bandwidth
7. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer



### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

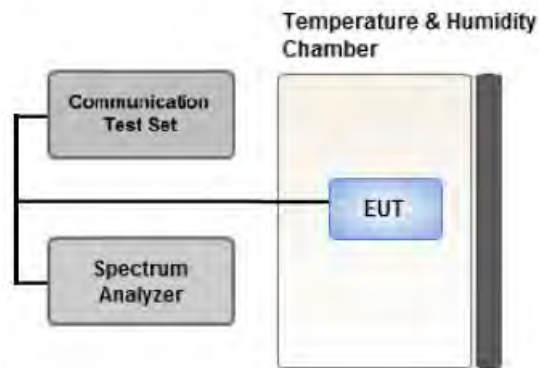

**Test setup**

#### **Test Overview**

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### **Test Settings**

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**3.9 WORST CASE(RADIATED TEST)**

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.
- All modes of operation were investigated and the worst case configuration results are reported.
- Please refer to the table below.

[ Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
<b>Effective Isotropic Radiated Power</b>	QPSK, 16QAM, 64QAM, 256QAM	1	0	X
<b>Radiated Spurious and Harmonic Emissions</b>	QPSK	1	0	Z

**3.10 WORST CASE(CONDUCTED TEST)**

- Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.  
 Conducted Output Power value can be confirmed on the SAR report.

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
<b>Occupied Bandwidth</b>	QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
<b>Peak-To-Average Ratio</b>	QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
<b>Channel Edge</b>	QPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		5, 10, 15, 20	Low, Mid, High	Full RB	0
<b>Spurious and Harmonic Emissions at Antenna Terminal</b>	QPSK	5, 10, 15, 20	Low, Mid, High	1	0

#### 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibrati on Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
WAINWRIGHT INSTRUMENT	WHNX6.0/26.5G-6SS/H.P.F	1	03/19/2020	Annual	03/19/2021
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	04/27/2020	Annual	04/27/2021
Hewlett Packard	E3632A/DC Power Supply	MY4004427	09/27/2019	Annual	09/27/2020
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93000717	08/14/2019	Annual	08/14/2020
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	02/11/2020	Biennial	02/11/2022
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	04/27/2020	Annual	04/27/2021
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2020	Annual	06/04/2021
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/14/2019	Annual	10/14/2020
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/27/2019	Annual	08/27/2020
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	04/26/2019	Biennial	04/26/2021
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6201502997	08/09/2019	Annual	08/09/2020
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/22/2020	Annual	01/22/2021
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/15/2019	Annual	07/15/2020
KEYSIGHT	E7515B / 5G Wireless Tester	MY58300756	01/07/2020	Annual	01/07/2021
KEYSIGHT	N9030B / Signal Analyzer(5Hz~40.0GHz)	MY55480167	06/04/2020	Annual	06/04/2021
Mini-Circuits	ZC4PD-K1844+ / 4-Way Divider	942907	09/05/2019	Annual	09/05/2020
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(m)(4)	<ul style="list-style-type: none"> <li>■ &lt; 40 + 10log10 (P[Watts]) at Channel edges</li> <li>■ &lt; 43 + 10log10 (P[Watts]) between 5 and X MHz from Channel edges</li> <li>■ &lt; 55 + 10log10 (P[Watts]) beyond X MHz beyond from Channel edges</li> <li>■ &lt; 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz</li> </ul>	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report
2. The same samples were used for SAR and EMC

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(h)(2)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(m)(4)	< 55 + 10log10 (P[Watts])	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
40620	2593.0	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.



7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW  
GSM BW = 249 kHz  
G = Phase Modulation  
X = Cases not otherwise covered  
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W  
GSM BW = 249 kHz  
G = Phase Modulation  
7 = Quantized/Digital Info  
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W  
WCDMA BW = 4.17 MHz  
F = Frequency Modulation  
9 = Composite Digital Info  
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D  
LTE BW = 4.48 MHz  
G = Phase Modulation  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D  
LTE BW = 4.48 MHz  
W = Amplitude/Angle Modulated  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand

64QAM Modulation

Emission Designator = 4M48W7D  
LTE BW = 4.48 MHz  
W = Amplitude/Angle Modulated  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER

#### 8.1.1 Power Class 3

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
2498.5	LTE B41 5 MHz	QPSK	-21.34	15.41	10.70	2.31	H	< 2.00	0.240	23.80	
		16-QAM	-22.25	14.50	10.70	2.31	H		0.195	22.89	
		64-QAM	-22.50	14.25	10.70	2.31	H		0.184	22.64	
		256-QAM	-25.19	11.56	10.70	2.31	H		0.099	19.95	
2593.0		QPSK	-20.84	15.95	10.98	2.35	H		0.287	24.58	
		16-QAM	-21.96	14.83	10.98	2.35	H		0.222	23.46	
		64-QAM	-22.72	14.07	10.98	2.35	H		0.186	22.70	
		256-QAM	-25.54	11.25	10.98	2.35	H		0.097	19.88	
2687.5		QPSK	-21.79	15.37	11.10	2.39	H		0.256	24.08	
		16-QAM	-22.55	14.61	11.10	2.39	H		0.215	23.32	
		64-QAM	-23.64	13.52	11.10	2.39	H		0.167	22.23	
		256-QAM	-26.53	10.63	11.10	2.39	H		0.086	19.34	

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
2501.0	LTE B41 10 MHz	QPSK	-21.26	15.49	10.70	2.31	H	< 2.00	0.245	23.88	
		16-QAM	-21.97	14.78	10.70	2.31	H		0.208	23.17	
		64-QAM	-22.47	14.28	10.70	2.31	H		0.185	22.67	
		256-QAM	-25.35	11.40	10.70	2.31	H		0.095	19.79	
2593.0		QPSK	-21.07	15.72	10.98	2.35	H		0.272	24.35	
		16-QAM	-22.07	14.72	10.98	2.35	H		0.216	23.35	
		64-QAM	-23.24	13.55	10.98	2.35	H		0.165	22.18	
		256-QAM	-25.91	10.88	10.98	2.35	H		0.089	19.51	
2685.0		QPSK	-22.20	14.88	11.10	2.39	H		0.228	23.59	
		16-QAM	-22.91	14.17	11.10	2.39	H		0.194	22.88	
		64-QAM	-23.97	13.11	11.10	2.39	H		0.152	21.82	
		256-QAM	-26.97	10.11	11.10	2.39	H		0.076	18.82	

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
2503.5	LTE B41 15 MHz	QPSK	-21.30	15.45	10.70	2.31	H	< 2.00	0.242	23.84	
		16-QAM	-21.93	14.82	10.70	2.31	H		0.210	23.21	
		64-QAM	-22.72	14.03	10.70	2.31	H		0.175	22.42	
		256-QAM	-25.44	11.31	10.70	2.31	H		0.093	19.70	
2593.0		QPSK	-21.01	15.78	10.98	2.35	H		0.276	24.41	
		16-QAM	-22.01	14.78	10.98	2.35	H		0.219	23.41	
		64-QAM	-22.84	13.95	10.98	2.35	H		0.181	22.58	
		256-QAM	-25.82	10.97	10.98	2.35	H		0.091	19.60	
2682.5		QPSK	-21.89	15.09	11.10	2.38	H		0.240	23.81	
		16-QAM	-22.65	14.33	11.10	2.38	H		0.202	23.05	
		64-QAM	-23.69	13.29	11.10	2.38	H		0.159	22.01	
		256-QAM	-26.64	10.34	11.10	2.38	H		0.081	19.06	

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
2506.0	LTE B41 20 MHz	QPSK	-22.38	14.29	10.73	2.32	H	< 2.00	0.186	22.70	
		16-QAM	-23.06	13.61	10.73	2.32	H		0.159	22.02	
		64-QAM	-23.19	13.48	10.73	2.32	H		0.155	21.89	
		256-QAM	-25.55	11.12	10.73	2.32	H		0.090	19.53	
2593.0		QPSK	-21.63	15.16	10.98	2.35	H		0.239	23.79	
		16-QAM	-22.65	14.14	10.98	2.35	H		0.189	22.77	
		64-QAM	-23.24	13.55	10.98	2.35	H		0.165	22.18	
		256-QAM	-26.28	10.51	10.98	2.35	H		0.082	19.14	
2680.0		QPSK	-22.14	14.84	11.10	2.38	H		0.227	23.56	
		16-QAM	-22.96	14.02	11.10	2.38	H		0.188	22.74	
		64-QAM	-24.01	12.97	11.10	2.38	H		0.148	21.69	
		256-QAM	-26.90	10.08	11.10	2.38	H		0.076	18.80	

8.1.2 Power Class 2

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
2498.5	LTE B41/ 5 MHz	QPSK	-16.74	20.01	10.70	2.31	H	< 2.00	0.692	28.40	
		16-QAM	-17.59	19.16	10.70	2.31	H		0.569	27.55	
		64-QAM	-19.06	17.69	10.70	2.31	H		0.406	26.08	
		256-QAM	-21.57	15.18	10.70	2.31	H		0.228	23.57	
2593.0		QPSK	-17.98	18.81	10.98	2.35	H		0.555	27.44	
		16-QAM	-18.77	18.02	10.98	2.35	H		0.462	26.65	
		64-QAM	-19.14	17.65	10.98	2.35	H		0.425	26.28	
		256-QAM	-22.75	14.04	10.98	2.35	H		0.185	22.67	
2687.5		QPSK	-19.08	18.08	11.10	2.39	H		0.478	26.79	
		16-QAM	-19.89	17.27	11.10	2.39	H		0.396	25.98	
		64-QAM	-20.91	16.25	11.10	2.39	H		0.313	24.96	
		256-QAM	-23.86	13.30	11.10	2.39	H		0.159	22.01	

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
2501.0	LTE B41/ 10 MHz	QPSK	-16.80	19.95	10.70	2.31	H	< 2.00	0.683	28.34	
		16-QAM	-17.45	19.30	10.70	2.31	H		0.588	27.69	
		64-QAM	-19.21	17.54	10.70	2.31	H		0.392	25.93	
		256-QAM	-21.80	14.95	10.70	2.31	H		0.216	23.34	
2593.0		QPSK	-18.24	18.55	10.98	2.35	H		0.523	27.18	
		16-QAM	-19.03	17.76	10.98	2.35	H		0.436	26.39	
		64-QAM	-20.10	16.69	10.98	2.35	H		0.340	25.32	
		256-QAM	-22.10	14.69	10.98	2.35	H		0.215	23.32	
2685.0		QPSK	-19.42	17.66	11.10	2.39	H		0.433	26.37	
		16-QAM	-20.18	16.90	11.10	2.39	H		0.364	25.61	
		64-QAM	-21.23	15.85	11.10	2.39	H		0.285	24.56	
		256-QAM	-22.12	14.96	11.10	2.39	H		0.233	23.67	

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
2503.5	LTE B41/ 15 MHz	QPSK	-16.95	19.80	10.70	2.31	H	< 2.00	0.660	28.19	
		16-QAM	-17.83	18.92	10.70	2.31	H		0.539	27.31	
		64-QAM	-19.57	17.18	10.70	2.31	H		0.361	25.57	
		256-QAM	-21.75	15.00	10.70	2.31	H		0.218	23.39	
2593.0		QPSK	-18.09	18.70	10.98	2.35	H		0.541	27.33	
		16-QAM	-18.98	17.81	10.98	2.35	H		0.441	26.44	
		64-QAM	-20.01	16.78	10.98	2.35	H		0.348	25.41	
		256-QAM	-22.92	13.87	10.98	2.35	H		0.178	22.50	
2682.5		QPSK	-19.20	17.78	11.10	2.38	H		0.447	26.50	
		16-QAM	-19.93	17.05	11.10	2.38	H		0.378	25.77	
		64-QAM	-20.96	16.02	11.10	2.38	H		0.298	24.74	
		256-QAM	-23.95	13.03	11.10	2.38	H		0.150	21.75	

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
2506.0	LTE B41/ 20 MHz	QPSK	-16.80	19.87	10.73	2.32	H	< 2.00	0.673	28.28	
		16-QAM	-17.53	19.14	10.73	2.32	H		0.569	27.55	
		64-QAM	-19.47	17.20	10.73	2.32	H		0.364	25.61	
		256-QAM	-21.86	14.81	10.73	2.32	H		0.210	23.22	
2593.0		QPSK	-18.45	18.34	10.98	2.35	H		0.498	26.97	
		16-QAM	-19.43	17.36	10.98	2.35	H		0.397	25.99	
		64-QAM	-20.46	16.33	10.98	2.35	H		0.313	24.96	
		256-QAM	-23.29	13.50	10.98	2.35	H		0.163	22.13	
2680.0		QPSK	-19.48	17.50	11.10	2.38	H		0.419	26.22	
		16-QAM	-20.20	16.78	11.10	2.38	H		0.355	25.50	
		64-QAM	-21.20	15.78	11.10	2.38	H		0.282	24.50	
		256-QAM	-24.28	12.70	11.10	2.38	H		0.139	21.42	

## 8.2 RADIATED SPURIOUS EMISSIONS

### 8.2.1 Power Class 3

- ▣ OPERATING FREQUENCY : 2593.0 MHz
- ▣ MEASURED OUTPUT POWER: 24.58 dBm = 0.287 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10}(W) =$  49.58 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
39675 (2498.5)	4,997.00	-44.51	12.70	-56.30	3.35	V	-46.95	71.53
	7,495.50	-48.57	11.20	-50.25	4.29	V	-43.34	67.92
	9,994.00	-58.16	11.89	-56.47	5.04	H	-49.62	74.20
40620 (2593.0)	5,186.00	-44.81	12.75	-56.58	3.44	H	-47.27	71.85
	7,779.00	-48.19	11.65	-50.83	4.36	H	-43.54	68.12
	10,372.00	-57.07	10.75	-53.81	5.16	V	-48.22	72.81
41565 (2687.5)	5,375.00	-45.30	13.52	-56.57	3.52	H	-46.57	71.16
	8,062.50	-47.12	10.93	-47.73	4.45	H	-41.25	65.83
	10,750.00	-57.50	10.90	-53.92	5.31	H	-48.33	72.91

- ▣ OPERATING FREQUENCY : 2593.0 MHz
- ▣ MEASURED OUTPUT POWER: 24.35 dBm = 0.272 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10}(W) =$  49.35 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
39700 (2501.0)	5,002.00	-49.15	12.70	-60.94	3.35	H	-51.59	75.94
	7,503.00	-51.02	11.20	-52.59	4.29	H	-45.68	70.03
	10,004.00	-58.72	10.84	-56.01	5.03	H	-50.20	74.55
40620 (2593.0)	5,186.00	-45.82	12.75	-57.59	3.44	H	-48.28	72.63
	7,779.00	-50.15	11.65	-52.79	4.36	H	-45.50	69.85
	10,372.00	-58.46	10.75	-55.20	5.16	V	-49.61	73.97
41540 (2685.0)	5,370.00	-45.02	13.25	-56.10	3.52	H	-46.37	70.72
	8,055.00	-50.48	10.92	-51.08	4.46	V	-44.62	68.97
	10,740.00	-57.83	10.90	-54.53	5.29	V	-48.92	73.27

- ▣ OPERATING FREQUENCY : 2593.0 MHz
- ▣ MEASURED OUTPUT POWER: 24.41 dBm = 0.276 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10}(W) =$  49.41 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
39725 (2503.5)	5,007.00	-49.48	12.65	-60.53	3.35	H	-51.23	75.64
	7,510.50	-50.85	11.25	-52.62	4.29	H	-45.66	70.07
	10,014.00	-57.59	11.02	-54.81	5.03	H	-48.82	73.23
40620 (2593.0)	5,186.00	-47.61	12.75	-59.38	3.44	H	-50.07	74.48
	7,779.00	-49.25	11.65	-51.89	4.36	H	-44.60	69.01
	10,372.00	-57.66	10.75	-54.40	5.16	V	-48.81	73.23
41515 (2682.5)	5,365.00	-44.03	13.27	-55.13	3.52	H	-45.38	69.79
	8,047.50	-49.83	10.90	-50.41	4.46	V	-43.97	68.38
	10,730.00	-57.34	10.90	-54.16	5.25	V	-48.51	72.92



- ▣ OPERATING FREQUENCY : 2593.0 MHz
- ▣ MEASURED OUTPUT POWER: 23.79 dBm = 0.239 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10}(W) =$  48.79 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
39750 (2506.0)	5,012.00	-49.14	12.65	-60.19	3.35	H	-50.89	74.68
	7,518.00	-51.74	11.30	-53.73	4.30	H	-46.73	70.53
	10,024.00	-59.03	11.05	-56.17	5.02	H	-50.14	73.93
40620 (2593.0)	5,186.00	-46.40	12.75	-58.17	3.44	H	-48.86	72.65
	7,779.00	-49.49	11.65	-52.13	4.36	H	-44.84	68.63
	10,372.00	-58.00	10.75	-54.74	5.16	H	-49.15	72.95
41490 (2680.0)	5,360.00	-43.53	13.28	-54.65	3.51	H	-44.88	68.68
	8,040.00	-51.10	10.93	-51.75	4.48	H	-45.30	69.09
	10,720.00	-59.23	10.90	-56.44	5.24	H	-50.78	74.58

**8.2.2 Power Class 2**

- ▣ OPERATING FREQUENCY : 2498.5 MHz
- ▣ MEASURED OUTPUT POWER: 28.40 dBm = 0.692 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10}(W) =$  53.40 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
39675 (2498.5)	4,997.00	-46.04	12.70	-57.83	3.35	H	-48.48	76.89
	7,495.50	-41.51	11.20	-43.19	4.29	H	-36.28	64.68
	9,994.00	-56.69	11.89	-55.00	5.04	V	-48.15	76.55
	12,492.50	-56.50	13.88	-54.93	5.78	H	-46.83	75.23
40620 (2593.0)	5,186.00	-39.17	12.75	-50.94	3.44	H	-41.63	70.03
	7,779.00	-41.40	11.65	-44.04	4.36	V	-36.75	65.15
	10,372.00	-51.81	10.75	-48.55	5.16	H	-42.96	71.37
41565 (2687.5)	5,375.00	-33.07	13.52	-44.35	3.52	H	-34.35	62.75
	8,062.50	-46.32	10.93	-46.93	4.45	H	-40.45	68.85
	10,750.00	-55.60	10.90	-52.02	5.31	H	-46.43	74.83

- ▣ OPERATING FREQUENCY : 2501.0 MHz
- ▣ MEASURED OUTPUT POWER: 28.34 dBm = 0.683 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10}(W) =$  53.34 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
39700 (2501.0)	5,002.00	-45.73	12.70	-57.52	3.35	H	-48.17	76.52
	7,503.00	-45.95	11.20	-47.52	4.29	V	-40.61	68.95
	10,004.00	-56.11	10.84	-53.40	5.03	V	-47.59	75.94
40620 (2593.0)	5,186.00	-39.13	12.75	-50.90	3.44	H	-41.59	69.93
	7,779.00	-45.54	11.65	-48.18	4.36	V	-40.89	69.23
	10,372.00	-54.43	10.75	-51.17	5.16	H	-45.58	73.93
41540 (2685.0)	5,370.00	-34.83	13.25	-45.91	3.52	H	-36.18	64.52
	8,055.00	-45.57	10.92	-46.17	4.46	H	-39.71	68.05
	10,740.00	-59.55	10.90	-56.25	5.29	H	-50.64	78.98

- ▣ OPERATING FREQUENCY : 2503.5 MHz
- ▣ MEASURED OUTPUT POWER: 28.19 dBm = 0.660 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10}(W) =$  53.19 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
39725 (2503.5)	5,007.00	-44.41	12.65	-55.46	3.35	H	-46.16	74.36
	7,510.50	-44.73	11.25	-46.50	4.29	H	-39.54	67.73
	10,014.00	-55.37	11.02	-52.59	5.03	V	-46.60	74.79
40620 (2593.0)	5,186.00	-39.75	12.75	-51.52	3.44	H	-42.21	70.40
	7,779.00	-43.38	11.65	-46.02	4.36	V	-38.73	66.92
	10,372.00	-55.20	10.75	-51.94	5.16	H	-46.35	74.55
41515 (2682.5)	5,365.00	-32.64	13.27	-43.74	3.52	H	-33.99	62.18
	8,047.50	-43.93	10.90	-44.51	4.46	H	-38.07	66.27
	10,730.00	-58.12	10.90	-54.94	5.25	H	-49.29	77.48

- ▣ OPERATING FREQUENCY : 2506.0 MHz
- ▣ MEASURED OUTPUT POWER: 28.28 dBm = 0.673 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10}(W) =$  53.28 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
39750 (2506.0)	5,012.00	-45.94	12.65	-56.99	3.35	H	-47.69	75.97
	7,518.00	-44.31	11.30	-46.30	4.30	V	-39.30	67.59
	10,024.00	-54.40	11.05	-51.54	5.02	V	-45.51	73.79
	12,530.00	-54.89	13.90	-52.33	5.67	H	-44.10	72.38
40620 (2593.0)	5,186.00	-40.22	12.75	-51.99	3.44	H	-42.68	70.96
	7,779.00	-46.59	11.65	-49.23	4.36	V	-41.94	70.22
	10,372.00	-53.08	10.75	-49.82	5.16	H	-44.23	72.52
41490 (2680.0)	5,360.00	-29.57	13.28	-40.69	3.51	H	-30.92	59.21
	8,040.00	-38.83	10.93	-39.48	4.48	V	-33.03	61.31
	10,720.00	-55.63	10.90	-52.84	5.24	V	-47.18	75.47

**8.3 PEAK-TO-AVERAGE RATIO**

**8.3.1 Power Class 3**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB )
41	5 MHz	2593.0	QPSK	25	0	5.23
			16-QAM			5.94
			64-QAM			6.44
			256-QAM			6.42
	10 MHz		QPSK	50		5.40
			16-QAM			6.05
			64-QAM			6.53
			256-QAM			6.54
	15 MHz		QPSK	75		5.22
			16-QAM			6.06
			64-QAM			6.60
			256-QAM			6.43
	20 MHz		QPSK	100		5.16
			16-QAM			5.95
			64-QAM			6.57
			256-QAM			6.48

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 103 ~ 118.

**8.3.2 Power Class 2**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB )
41	5 MHz	2593.0	QPSK	25	0	5.07
			16-QAM			5.91
			64-QAM			6.44
			256-QAM			6.40
	10 MHz		QPSK	50		5.14
			16-QAM			5.97
			64-QAM			6.56
			256-QAM			6.52
	15 MHz		QPSK	75		5.09
			16-QAM			5.98
			64-QAM			6.59
			256-QAM			6.58
	20 MHz		QPSK	100		5.10
			16-QAM			5.92
			64-QAM			6.55
			256-QAM			6.60

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 119 ~ 134.

**8.4 OCCUPIED BANDWIDTH**

**8.4.1 Power Class 3**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
41	5 MHz	2593.0	QPSK	25	0	4.5005
			16-QAM			4.4807
			64-QAM			4.5069
			256-QAM			4.4995
	10 MHz		QPSK	50		8.9543
			16-QAM			8.9607
			64-QAM			8.9658
			256-QAM			8.9688
	15 MHz		QPSK	75		13.441
			16-QAM			13.445
			64-QAM			13.437
			256-QAM			13.448
	20 MHz		QPSK	100		17.957
			16-QAM			17.874
			64-QAM			17.868
			256-QAM			17.904

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 71 ~ 86.



**8.4.2 Power Class 2**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
41	5 MHz	2593.0	QPSK	25	0	4.5020
			16-QAM			4.5060
			64-QAM			4.4945
			256-QAM			4.4894
	10 MHz		QPSK	50		8.9710
			16-QAM			8.9408
			64-QAM			8.9516
			256-QAM			8.9455
	15 MHz		QPSK	75		13.433
			16-QAM			13.459
			64-QAM			13.427
			256-QAM			13.418
	20 MHz		QPSK	100		17.899
			16-QAM			17.859
			64-QAM			17.865
			256-QAM			17.907

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 87 ~ 102.

**8.5 CONDUCTED SPURIOUS EMISSIONS**

**8.5.1 Power Class 3**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
41	5	2498.5	26.3977	34.111	-76.625	-42.514	-25.00
		2593.0	26.1135	34.111	-76.709	-42.598	
		2687.5	26.1193	34.111	-76.741	-42.630	
	10	2501.0	26.1601	34.111	-76.837	-42.726	
		2593.0	26.1424	34.111	-76.834	-42.723	
		2685.0	25.8012	34.111	-76.974	-42.863	
	15	2503.5	25.8297	34.111	-76.916	-42.805	
		2593.0	26.1362	34.111	-76.924	-42.813	
		2682.5	26.0978	34.111	-76.844	-42.733	
	20	2506.0	26.2389	34.111	-76.456	-42.345	
		2593.0	26.1395	34.111	-76.877	-42.766	
		2680.0	26.1721	34.111	-76.910	-42.799	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 191 ~ 218.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Duty Cycle factor already applied on the factor.
  - Duty Cycle factor(dB) = 3.98
  - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
  - Result(dBm) = Reading + Factor

Frequency Range (GHz)	Factor [dB]
0.03 – 1	29.250
1 – 5	31.956
5 – 10	32.571
10 – 15	33.096
15 – 20	33.469
Above 20	34.111

**8.5.2 Power Class 2**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
41	5	2498.5	12.4821	33.096	-75.582	-42.486	-25.00
		2593.0	26.1547	34.111	-76.812	-42.701	
		2687.5	26.1160	34.111	-76.708	-42.597	
	10	2501.0	26.1754	34.111	-76.779	-42.668	
		2593.0	26.1370	34.111	-77.092	-42.981	
		2685.0	26.1139	34.111	-76.644	-42.533	
	15	2503.5	12.4845	33.096	-76.698	-43.602	
		2593.0	26.1556	34.111	-76.733	-42.622	
		2682.5	26.1725	34.111	-75.418	-41.307	
	20	2506.0	26.1094	34.111	-76.941	-42.830	
		2593.0	26.1708	34.111	-76.874	-42.763	
		2680.0	26.1098	34.111	-76.494	-42.383	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 219 ~ 246.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Duty Cycle factor already applied on the factor.
  - Duty Cycle factor(dB) = 3.98
  - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
  - Result(dBm) = Reading + Factor

Frequency Range (GHz)	Factor [dB]
0.03 – 1	29.250
1 – 5	31.956
5 – 10	32.571
10 – 15	33.096
15 – 20	33.469
Above 20	34.111

**8.6 CHANNEL EDGE**

**8.6.1 Power Class 3**

Band Width	Frequency (MHz)	Modulation	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E +Norma lHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Abov e (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Lower
5 MHz	2498.5	QPSK	25/0	-27.01	-27.04	-26.26	-26.75	-36.15	-34.17	-35.04
10 MHz	2501.0	QPSK	50/0	-30.08	-28.12	-25.83	-27.04	-31.86	-30.18	-34.17
15 MHz	2503.5	QPSK	75/0	-30.76	-31.18	-30.04	-29.16	-34.14	-31.34	-37.84
20 MHz	2506.0	QPSK	100/0	-30.81	-31.18	-29.39	-30.02	-34.71	-31.39	-37.58
Limit				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resoure Block Offset	C.E ~ (C.E ± NormalHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-27.53	-29.17	-29.62	-29.74
	2687.5	QPSK	25	0	-27.14	-27.14	-25.36	-24.58
10 MHz	2593.0	QPSK	50	0	-29.84	-29.95	-32.27	-32.00
	2685.0	QPSK	50	0	-30.95	-29.79	-28.50	-27.84
15 MHz	2593.0	QPSK	75	0	-31.46	-31.49	-32.87	-32.17
	2682.5	QPSK	75	0	-30.47	-29.54	-29.17	-28.21
20 MHz	2593.0	QPSK	100	0	-30.01	-30.72	-31.67	-32.14
	2680.0	QPSK	100	0	-31.20	-30.33	-30.10	-29.52
Limit					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resoure Block Offset	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-33.72	-33.90	-33.91	-33.82
	2687.5	QPSK	25	0	-33.29	-33.75	-33.57	-34.14
10 MHz	2593.0	QPSK	50	0	-33.57	-33.17	-35.93	-36.04
	2685.0	QPSK	50	0	-29.79	-30.14	-35.35	-36.29
15 MHz	2593.0	QPSK	75	0	-34.50	-33.29	-37.98	-37.45
	2682.5	QPSK	75	0	-30.57	-30.61	-37.36	-37.60
20 MHz	2593.0	QPSK	100	0	-34.30	-35.01	-38.10	-38.09
	2680.0	QPSK	100	0	-31.91	-32.60	-37.32	-38.45
Limit					-13.0		-25.0	

Note:

1. C.E = Channel Edge
2. X = X is the greater of 6MHz or the actual emission bandwidth.
3. X = 6MHz(5MHz Bandwidth), 10MHz(10MHz Bandwidth), 15MHz(15MHz Bandwidth), 20MHz(20MHz Bandwidth)
4. Plots of the EUT's Channel Edge are shown Page 135 ~ 161. (1RB & Full RB)

**8.6.2 Power Class 2**

Band Width	Frequency (MHz)	Modulation	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E + NormalHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Above (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Upper
5 MHz	2498.5	QPSK	25/0	-23.26	-24.47	-20.20	-20.61	-28.25	-26.59	-28.62
10 MHz	2501.0	QPSK	50/0	-24.13	-24.56	-21.96	-20.04	-26.07	-24.21	-28.13
15 MHz	2503.5	QPSK	75/0	-26.27	-25.45	-23.62	-23.70	-27.11	-24.73	-29.25
20 MHz	2506.0	QPSK	100/0	-25.56	-26.08	-24.96	-24.64	-28.06	-25.54	-30.49
Limit				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	C.E ~ (C.E ± NormalHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-24.37	-24.47	-26.33	-26.33
	2687.5	QPSK	25	0	-23.20	-23.04	-20.96	-20.09
10 MHz	2593.0	QPSK	50	0	-25.73	-25.74	-25.64	-25.54
	2685.0	QPSK	50	0	-24.22	-24.07	-22.70	-22.36
15 MHz	2593.0	QPSK	75	0	-29.27	-28.45	-30.65	-29.89
	2682.5	QPSK	75	0	-26.74	-25.85	-25.37	-24.79
20 MHz	2593.0	QPSK	100	0	-28.57	-28.47	-29.42	-30.27
	2680.0	QPSK	100	0	-27.07	-26.08	-26.31	-25.77
Limit					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-29.46	-29.80	-30.61	-30.78
	2687.5	QPSK	25	0	-27.15	-27.55	-28.56	-29.29
10 MHz	2593.0	QPSK	50	0	-26.90	-27.16	-30.38	-30.38
	2685.0	QPSK	50	0	-23.91	-23.96	-28.25	-28.56
15 MHz	2593.0	QPSK	75	0	-30.15	-30.84	-33.48	-33.07
	2682.5	QPSK	75	0	-27.03	-27.24	-32.06	-31.81
20 MHz	2593.0	QPSK	100	0	-31.26	-31.08	-34.50	-33.46
	2680.0	QPSK	100	0	-27.51	-28.25	-33.63	-33.38
Limit					-13.0		-25.0	

**Note:**


1. C.E = Channel Edge
2. X = X is the greater of 6MHz or the actual emission bandwidth.
3. X = 6MHz(5MHz Bandwidth), 10MHz(10MHz Bandwidth), 15MHz(15MHz Bandwidth), 20MHz(20MHz Bandwidth)
4. Plots of the EUT's Channel Edge are shown Page 162 ~ 190. (1RB & Full RB)

**8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**

**8.7.1 Power Class 3**


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2498,500,000 Hz
- ▣ BANDWIDTH: 39675 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2498 499 988	0.0	0.000 000	0.000
100%		-30	2498 499 983	-5.5	0.000 000	-0.002
100%		-20	2498 499 983	-5.8	0.000 000	-0.002
100%		-10	2498 499 978	-10.8	0.000 000	-0.004
100%		0	2498 499 999	10.7	0.000 000	0.004
100%		+10	2498 499 975	-13.0	-0.000 001	-0.005
100%		+30	2498 499 992	3.7	0.000 000	0.001
100%		+40	2498 499 994	6.0	0.000 000	0.002
100%		+50	2498 499 977	-11.6	0.000 000	-0.005
85%	3.400	+20	2498 499 997	8.6	0.000 000	0.003

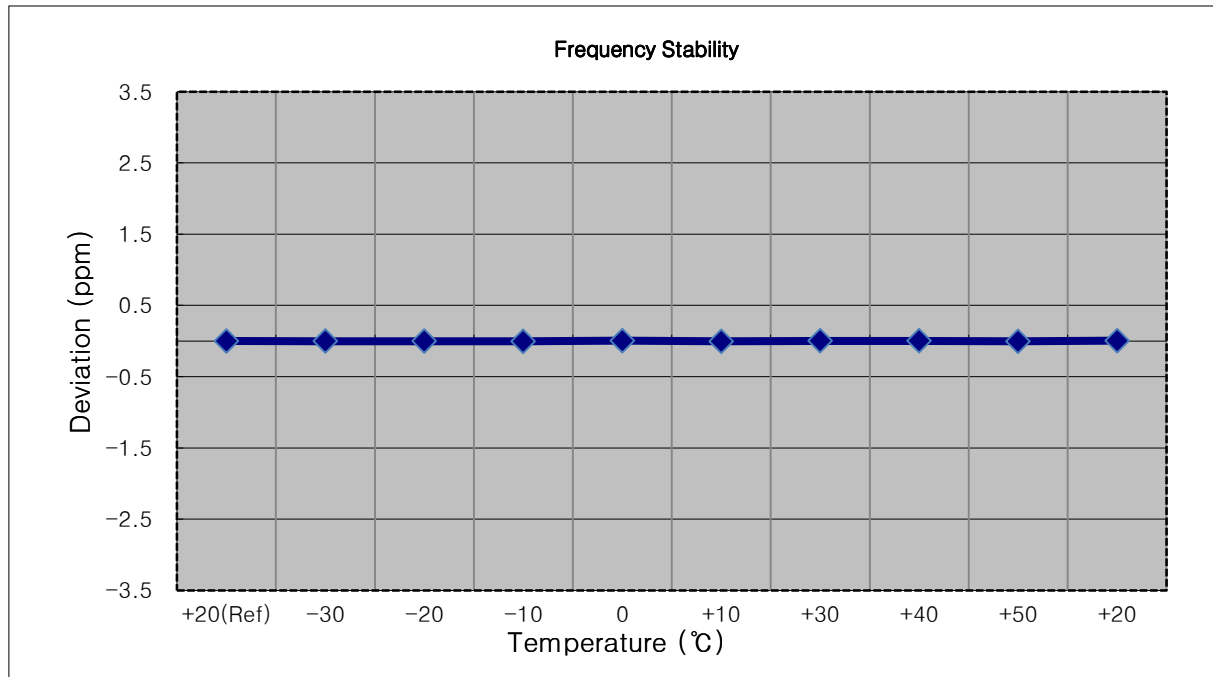


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2501,000,000 Hz
- ▣ BANDWIDTH: 39700 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2501 000 006	0.0	0.000 000	0.000
100%		-30	2501 000 010	3.9	0.000 000	0.002
100%		-20	2501 000 004	-2.7	0.000 000	-0.001
100%		-10	2501 000 009	2.9	0.000 000	0.001
100%		0	2501 000 014	8.0	0.000 000	0.003
100%		+10	2501 000 010	3.6	0.000 000	0.001
100%		+30	2501 000 012	5.4	0.000 000	0.002
100%		+40	2500 999 995	-11.1	0.000 000	-0.004
100%		+50	2501 000 002	-4.7	0.000 000	-0.002
85%	3.400	+20	2501 000 011	4.7	0.000 000	0.002

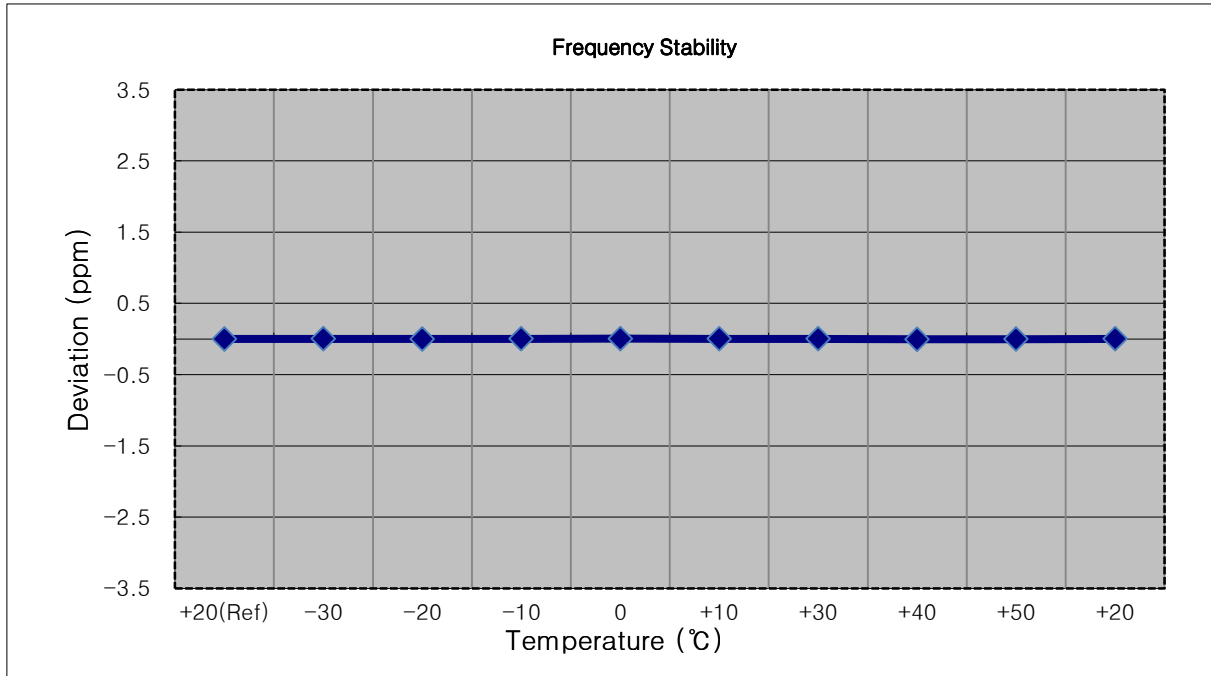

- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2503,500,000 Hz
- ▣ BANDWIDTH: 39725 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2503 499 995	0.0	0.000 000	0.000
100%		-30	2503 499 987	-8.1	0.000 000	-0.003
100%		-20	2503 499 991	-3.6	0.000 000	-0.001
100%		-10	2503 500 000	4.6	0.000 000	0.002
100%		0	2503 499 998	3.5	0.000 000	0.001
100%		+10	2503 500 001	5.9	0.000 000	0.002
100%		+30	2503 500 002	6.6	0.000 000	0.003
100%		+40	2503 499 985	-10.2	0.000 000	-0.004
100%		+50	2503 500 004	8.7	0.000 000	0.003
85%	3.400	+20	2503 500 000	4.9	0.000 000	0.002

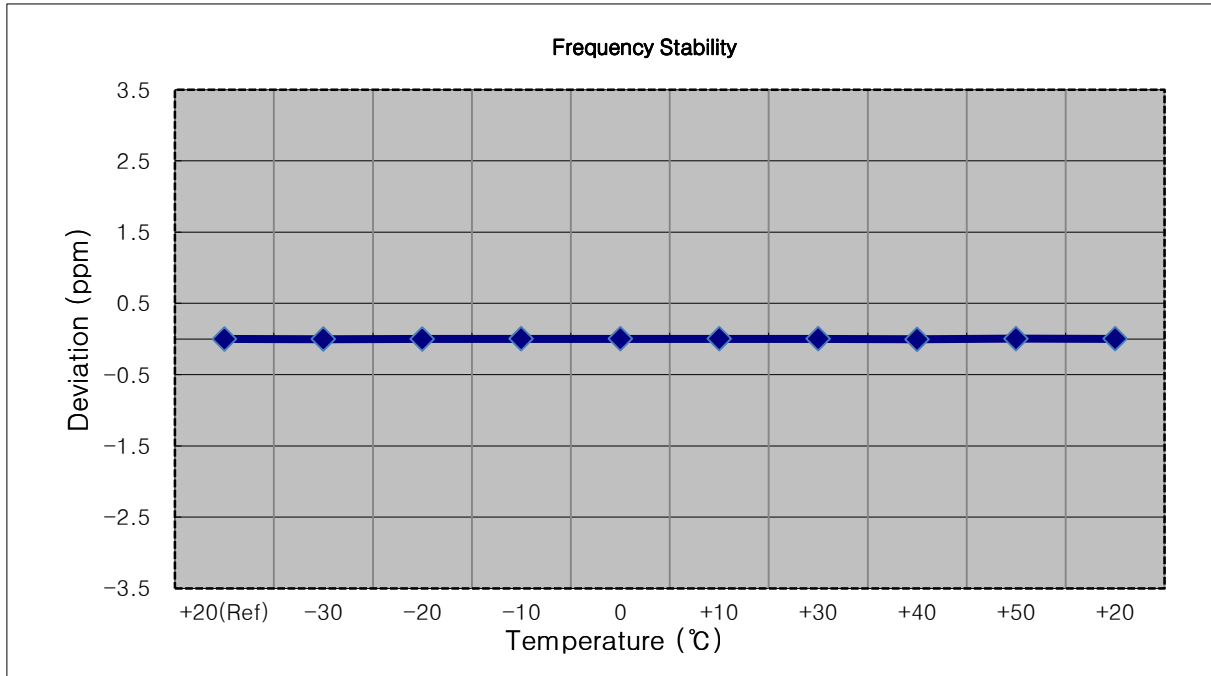




- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2506,000,000 Hz
- ▣ BANDWIDTH: 39750 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2505 999 996	0.0	0.000 000	0.000
100%		-30	2505 999 991	-5.0	0.000 000	-0.002
100%		-20	2505 999 988	-7.7	0.000 000	-0.003
100%		-10	2505 999 987	-8.3	0.000 000	-0.003
100%		0	2505 999 988	-7.7	0.000 000	-0.003
100%		+10	2505 999 992	-3.9	0.000 000	-0.002
100%		+30	2505 999 989	-7.1	0.000 000	-0.003
100%		+40	2505 999 987	-8.8	0.000 000	-0.004
100%		+50	2505 999 984	-11.5	0.000 000	-0.005
85%		3.400	+20	2506 000 002	6.5	0.000 000

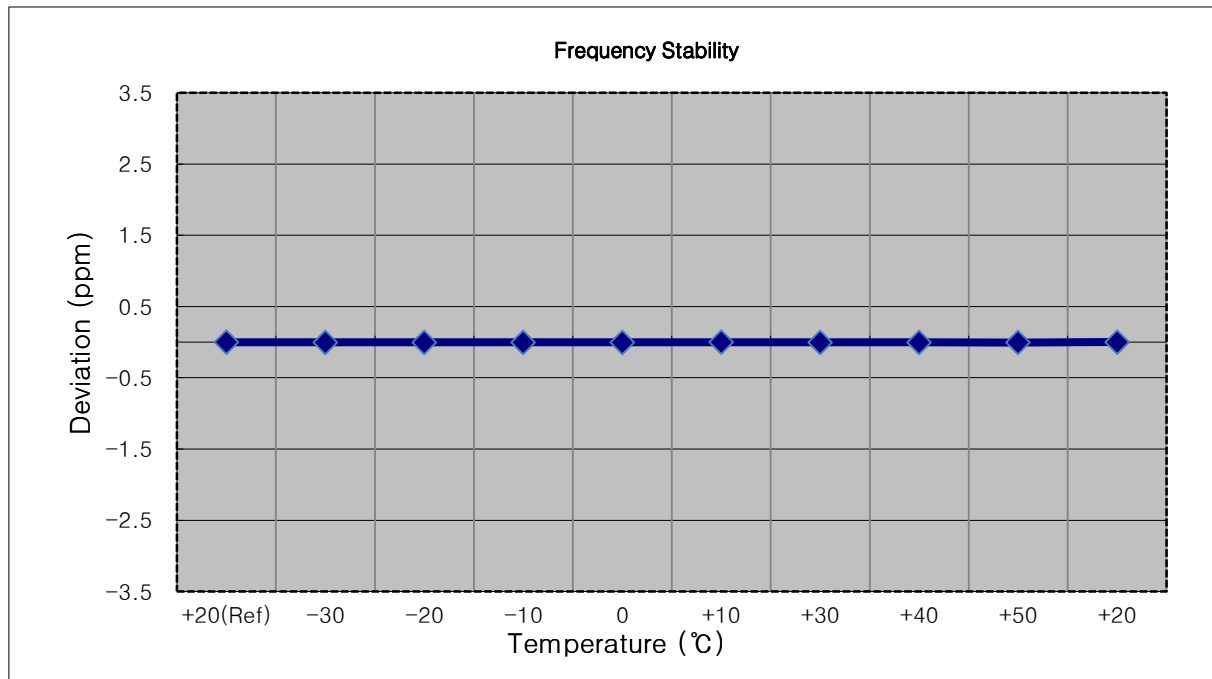


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2592 999 987	0.0	0.000 000	0.000
100%		-30	2592 999 973	-14.4	-0.000 001	-0.006
100%		-20	2592 999 991	3.9	0.000 000	0.002
100%		-10	2592 999 992	5.0	0.000 000	0.002
100%		0	2592 999 970	-17.3	-0.000 001	-0.007
100%		+10	2592 999 990	3.5	0.000 000	0.001
100%		+30	2592 999 974	-13.1	-0.000 001	-0.005
100%		+40	2592 999 973	-14.4	-0.000 001	-0.006
100%		+50	2592 999 993	6.4	0.000 000	0.002
85%	3.400	+20	2592 999 990	2.6	0.000 000	0.001

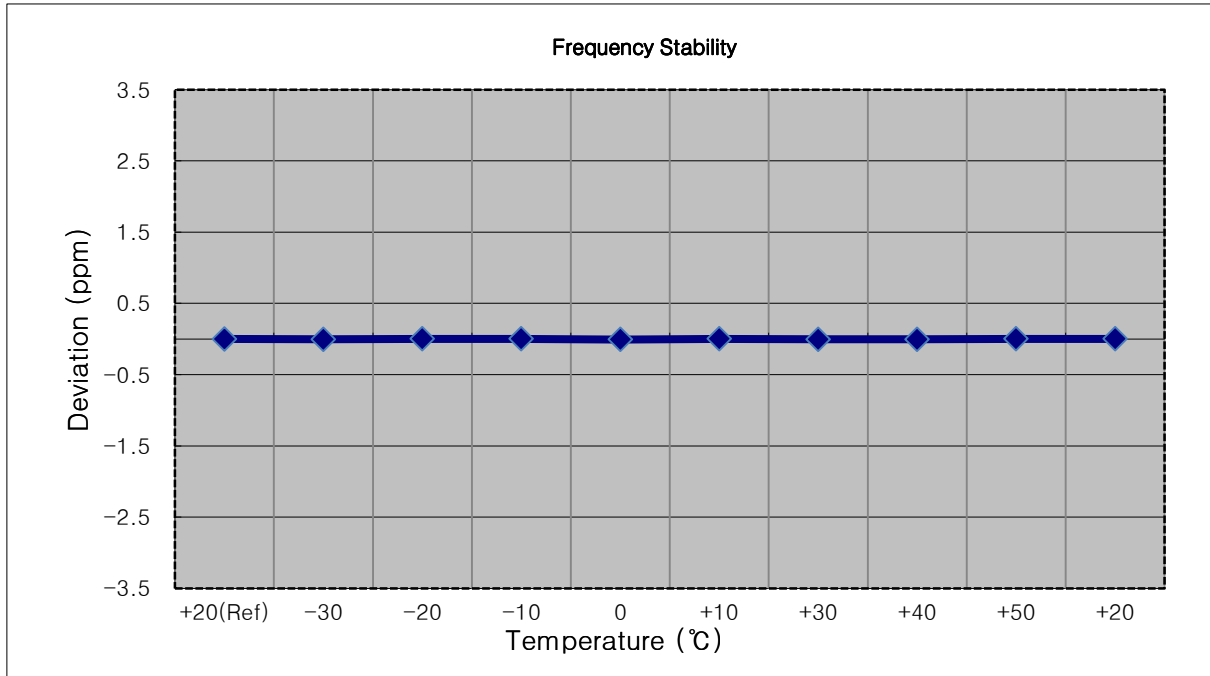


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2592 999 985	0.0	0.000 000	0.000
100%		-30	2592 999 970	-14.7	-0.000 001	-0.006
100%		-20	2592 999 970	-14.1	-0.000 001	-0.005
100%		-10	2592 999 973	-11.8	0.000 000	-0.005
100%		0	2592 999 975	-9.9	0.000 000	-0.004
100%		+10	2592 999 972	-12.1	0.000 000	-0.005
100%		+30	2592 999 972	-12.2	0.000 000	-0.005
100%		+40	2592 999 970	-14.1	-0.000 001	-0.005
100%		+50	2592 999 989	4.9	0.000 000	0.002
85%	3.400	+20	2592 999 989	4.7	0.000 000	0.002

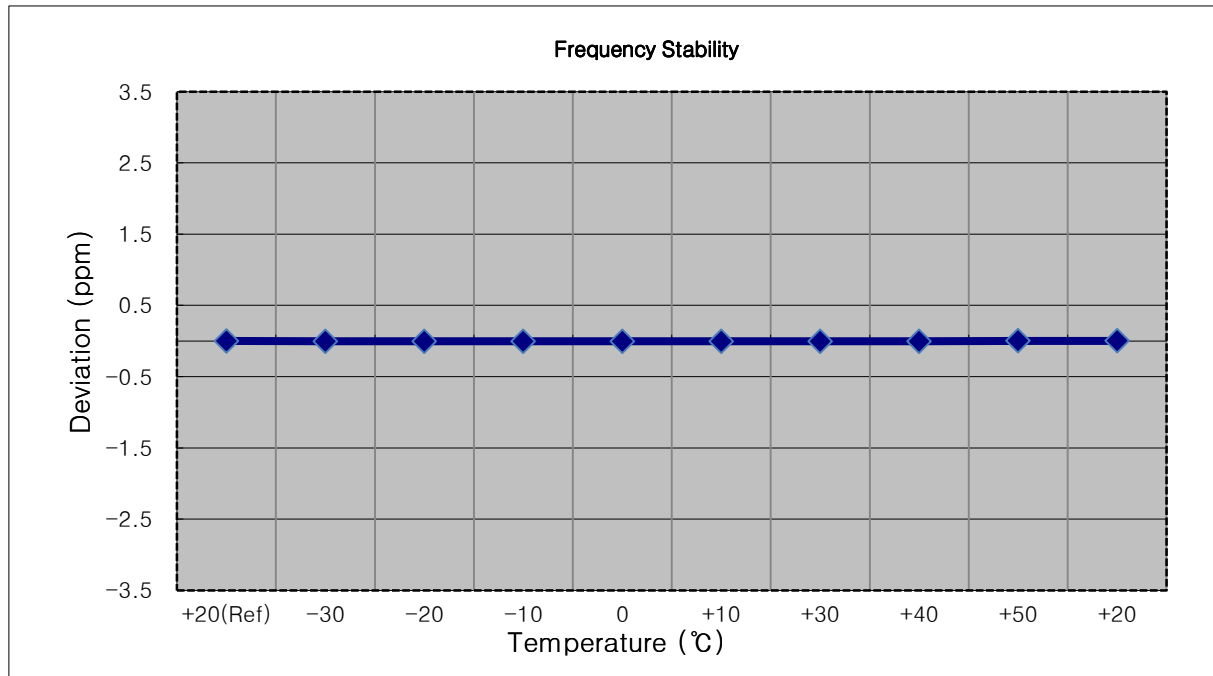


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2592 999 998	0.0	0.000 000	0.000
100%		-30	2592 999 991	-7.5	0.000 000	-0.003
100%		-20	2592 999 982	-16.1	-0.000 001	-0.006
100%		-10	2592 999 983	-15.1	-0.000 001	-0.006
100%		0	2592 999 996	-2.5	0.000 000	-0.001
100%		+10	2592 999 983	-15.1	-0.000 001	-0.006
100%		+30	2592 999 984	-13.8	-0.000 001	-0.005
100%		+40	2592 999 983	-14.7	-0.000 001	-0.006
100%		+50	2592 999 981	-17.6	-0.000 001	-0.007
85%	3.400	+20	2592 999 984	-13.7	-0.000 001	-0.005

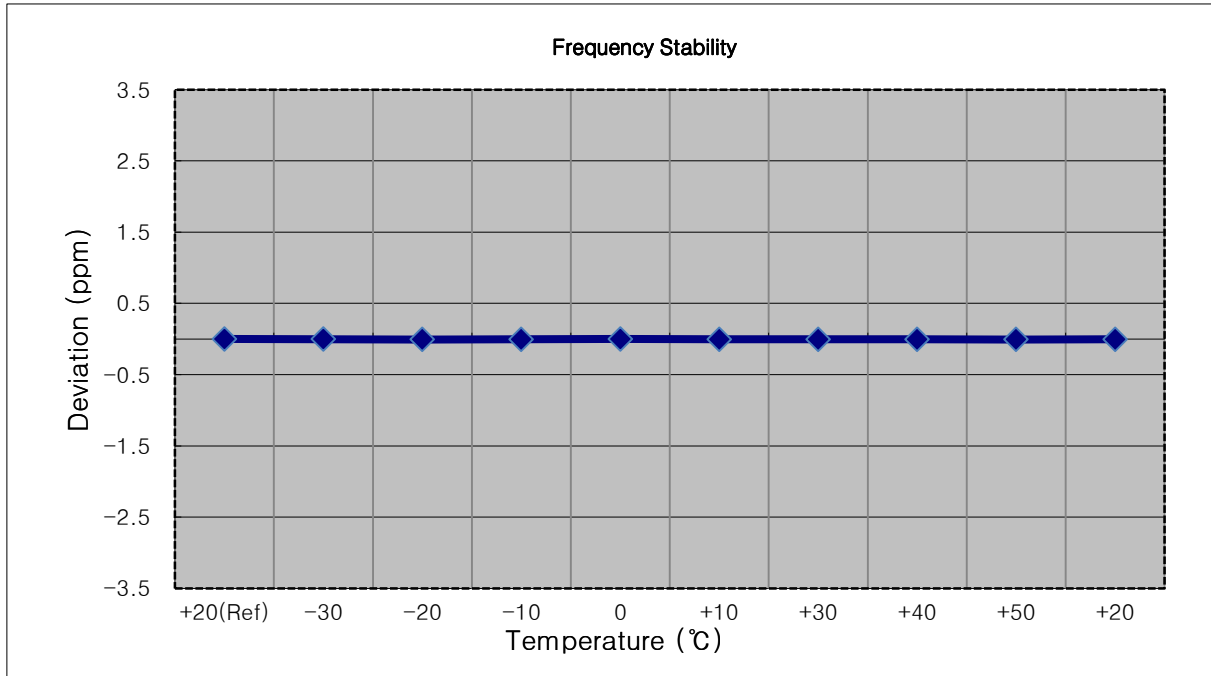


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2592 999 996	0.0	0.000 000	0.000
100%		-30	2592 999 990	-5.8	0.000 000	-0.002
100%		-20	2592 999 984	-11.4	0.000 000	-0.004
100%		-10	2592 999 985	-10.6	0.000 000	-0.004
100%		0	2593 000 000	3.9	0.000 000	0.002
100%		+10	2592 999 979	-17.1	-0.000 001	-0.007
100%		+30	2592 999 999	3.7	0.000 000	0.001
100%		+40	2592 999 980	-16.1	-0.000 001	-0.006
100%		+50	2592 999 997	1.4	0.000 000	0.001
85%	3.400	+20	2592 999 998	1.8	0.000 000	0.001

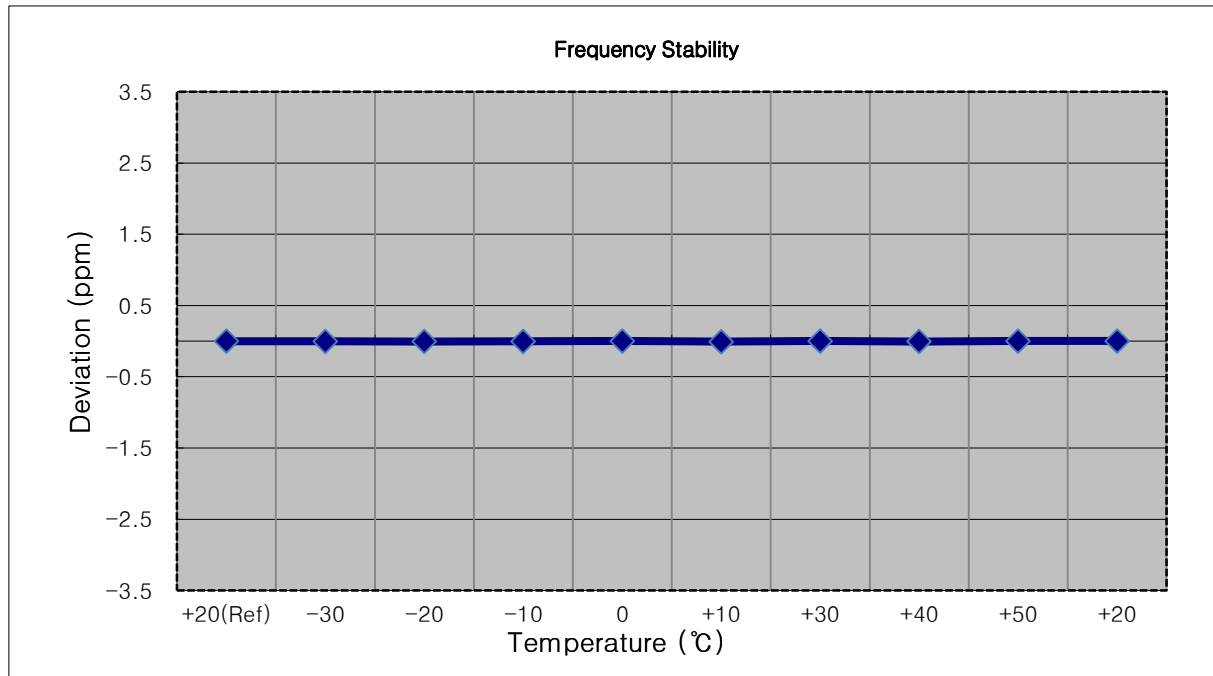


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2687,500,000 Hz
- ▣ BANDWIDTH: 41565 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2687 499 987	0.0	0.000 000	0.000
100%		-30	2687 499 969	-17.5	-0.000 001	-0.007
100%		-20	2687 499 968	-19.1	-0.000 001	-0.007
100%		-10	2687 499 971	-15.5	-0.000 001	-0.006
100%		0	2687 499 964	-22.5	-0.000 001	-0.008
100%		+10	2687 499 966	-20.8	-0.000 001	-0.008
100%		+30	2687 499 960	-27.2	-0.000 001	-0.010
100%		+40	2687 499 963	-23.9	-0.000 001	-0.009
100%		+50	2687 499 958	-29.3	-0.000 001	-0.011
85%		3.400	+20	2687 499 962	-25.2	-0.000 001

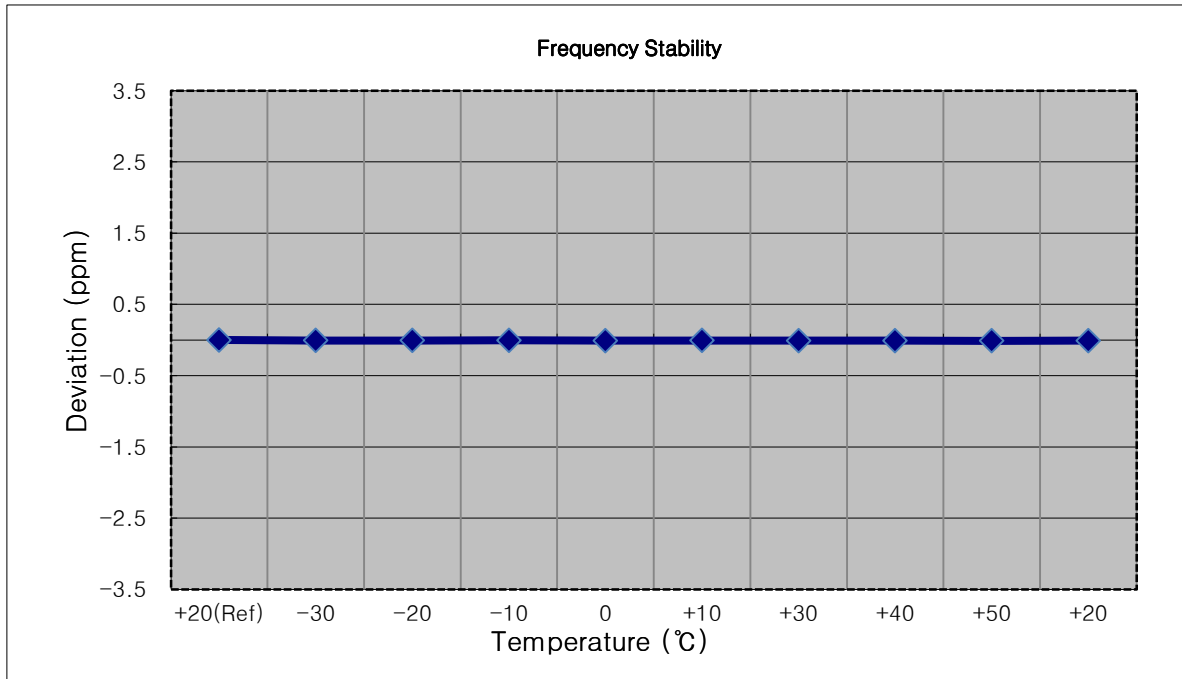


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2685,000,000 Hz
- ▣ BANDWIDTH: 41540 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2684 999 990	0.0	0.000 000	0.000
100%		-30	2684 999 974	-16.6	-0.000 001	-0.006
100%		-20	2684 999 993	3.2	0.000 000	0.001
100%		-10	2684 999 994	3.7	0.000 000	0.001
100%		0	2684 999 981	-9.3	0.000 000	-0.003
100%		+10	2684 999 973	-16.8	-0.000 001	-0.006
100%		+30	2684 999 972	-18.4	-0.000 001	-0.007
100%		+40	2684 999 983	-7.5	0.000 000	-0.003
100%		+50	2684 999 973	-17.6	-0.000 001	-0.007
85%	3.400	+20	2684 999 974	-16.6	-0.000 001	-0.006

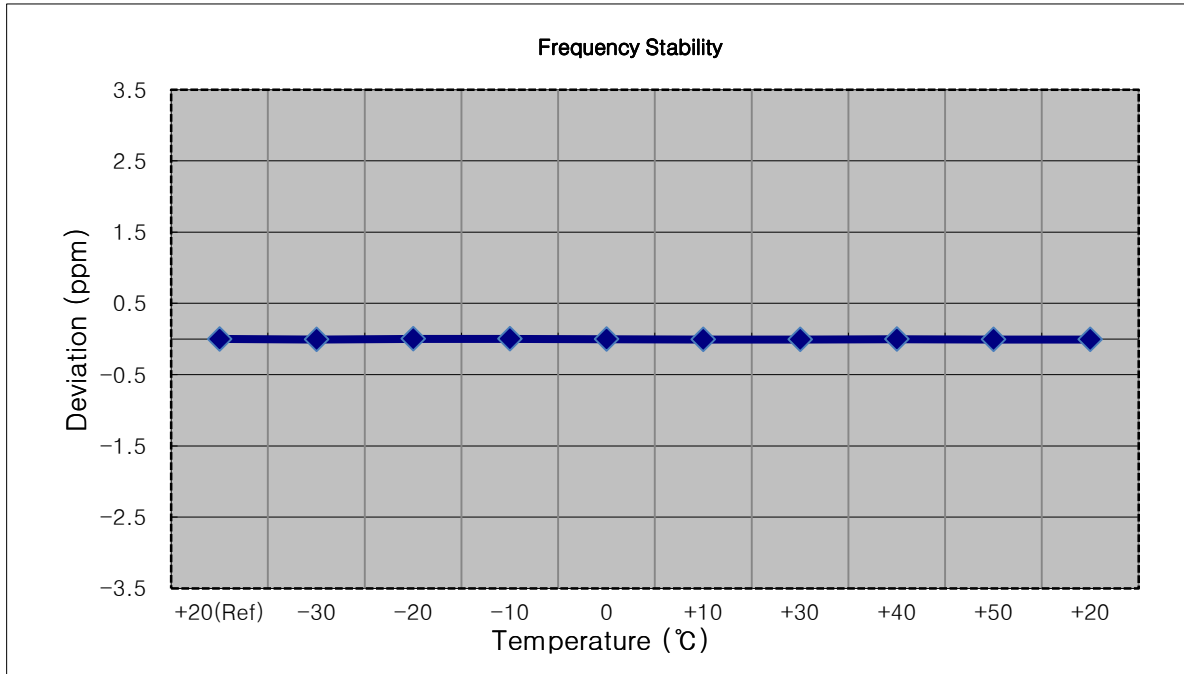

- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2682,500,000 Hz
- ▣ BANDWIDTH: 41515 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2682 499 997	0.0	0.000 000	0.000
100%		-30	2682 499 991	-6.1	0.000 000	-0.002
100%		-20	2682 499 980	-16.5	-0.000 001	-0.006
100%		-10	2682 499 982	-14.6	-0.000 001	-0.005
100%		0	2682 499 994	-2.8	0.000 000	-0.001
100%		+10	2682 499 982	-14.6	-0.000 001	-0.005
100%		+30	2682 499 989	-7.7	0.000 000	-0.003
100%		+40	2682 499 989	-7.4	0.000 000	-0.003
100%		+50	2682 499 991	-5.3	0.000 000	-0.002
85%	3.400	+20	2682 499 991	-5.6	0.000 000	-0.002

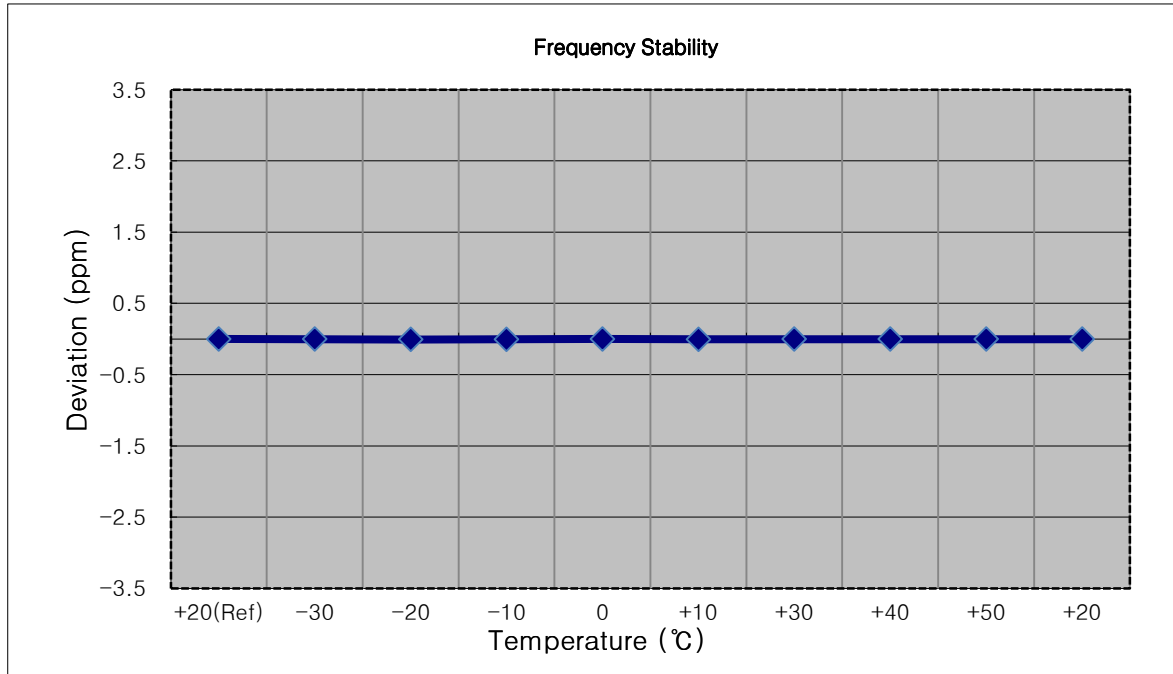



- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2680,000,000 Hz
- ▣ BANDWIDTH: 41490 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2679 999 996	0.0	0.000 000	0.000
100%		-30	2679 999 994	-2.3	0.000 000	-0.001
100%		-20	2679 999 983	-12.9	0.000 000	-0.005
100%		-10	2679 999 986	-10.4	0.000 000	-0.004
100%		0	2679 999 986	-10.4	0.000 000	-0.004
100%		+10	2679 999 985	-11.1	0.000 000	-0.004
100%		+30	2679 999 983	-12.8	0.000 000	-0.005
100%		+40	2679 999 993	-3.0	0.000 000	-0.001
100%		+50	2679 999 979	-16.5	-0.000 001	-0.006
85%	3.400	+20	2679 999 977	-19.2	-0.000 001	-0.007

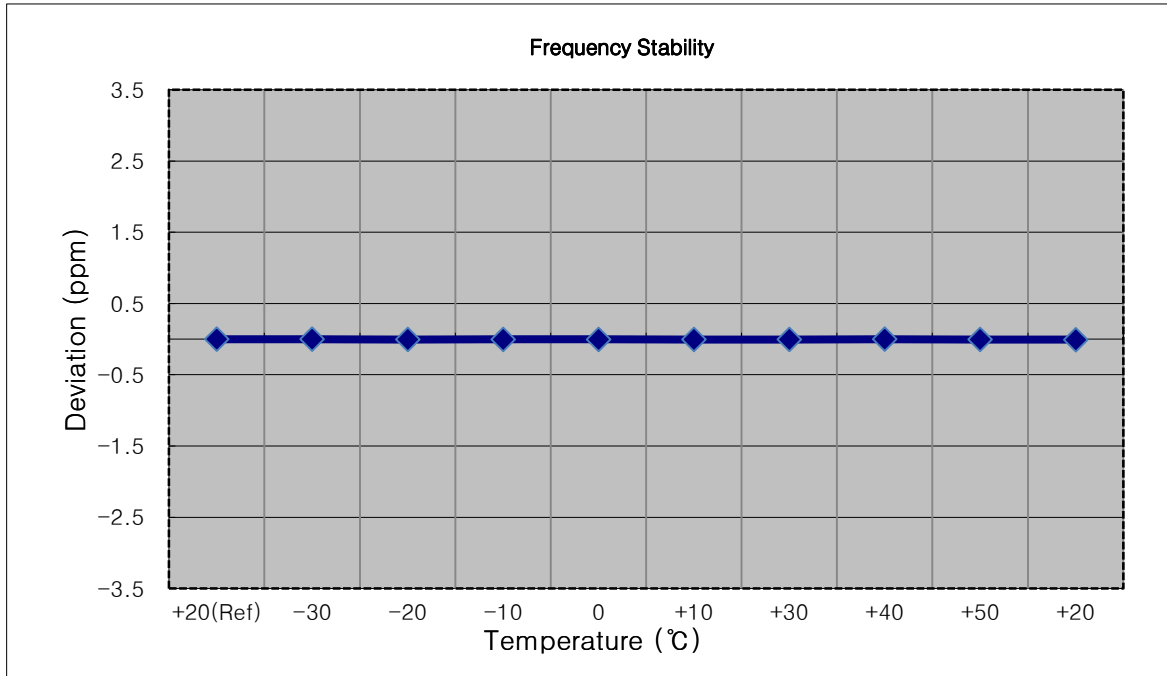

**8.7.2 Power Class 2**


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2498,500,000 Hz
- ▣ BANDWIDTH: 39675 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2498 500 003	0.0	0.000 000	0.000
100%		-30	2498 499 998	-4.9	0.000 000	-0.002
100%		-20	2498 499 996	-7.6	0.000 000	-0.003
100%		-10	2498 500 001	-1.9	0.000 000	-0.001
100%		0	2498 499 998	-5.2	0.000 000	-0.002
100%		+10	2498 500 007	3.7	0.000 000	0.001
100%		+30	2498 500 007	3.9	0.000 000	0.002
100%		+40	2498 500 008	5.0	0.000 000	0.002
100%		+50	2498 500 008	4.7	0.000 000	0.002
85%		3.400	+20	2498 500 000	-2.9	0.000 000

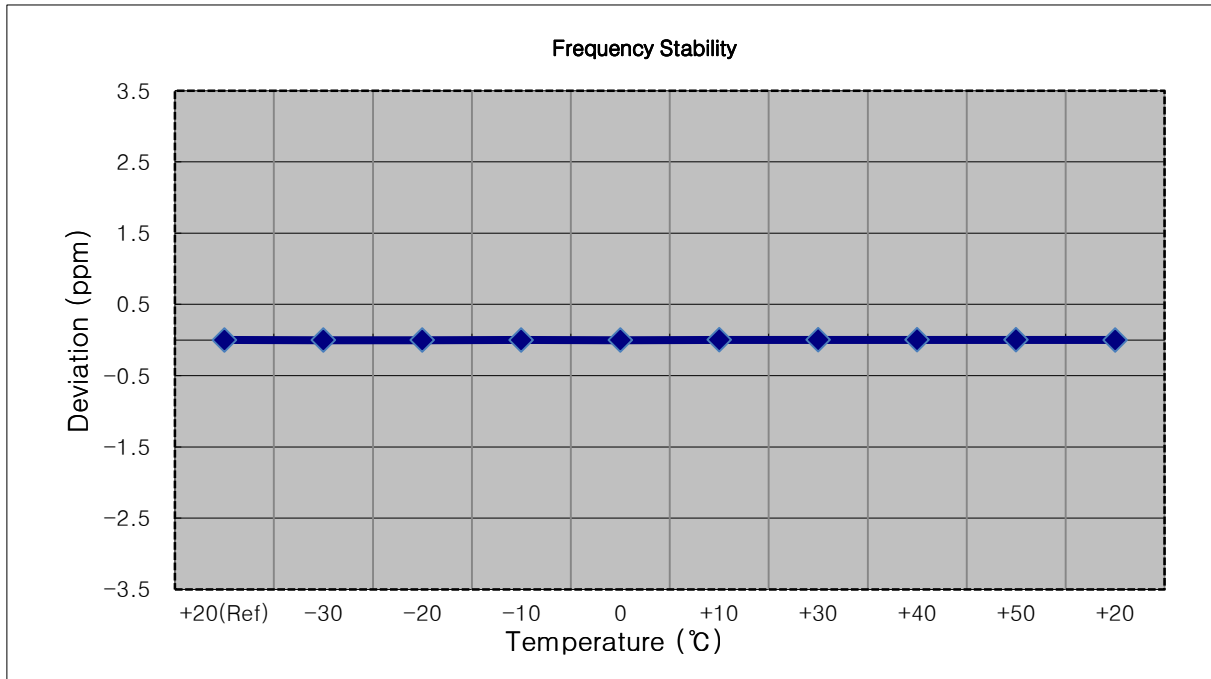


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2501,000,000 Hz
- ▣ BANDWIDTH: 39700 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2500 999 994	0.0	0.000 000	0.000
100%		-30	2500 999 991	-2.6	0.000 000	-0.001
100%		-20	2500 999 989	-5.4	0.000 000	-0.002
100%		-10	2500 999 991	-2.5	0.000 000	-0.001
100%		0	2501 000 001	7.3	0.000 000	0.003
100%		+10	2500 999 997	2.7	0.000 000	0.001
100%		+30	2500 999 990	-4.2	0.000 000	-0.002
100%		+40	2500 999 988	-5.8	0.000 000	-0.002
100%		+50	2500 999 990	-4.0	0.000 000	-0.002
85%	3.400	+20	2501 000 006	12.2	0.000 000	0.005

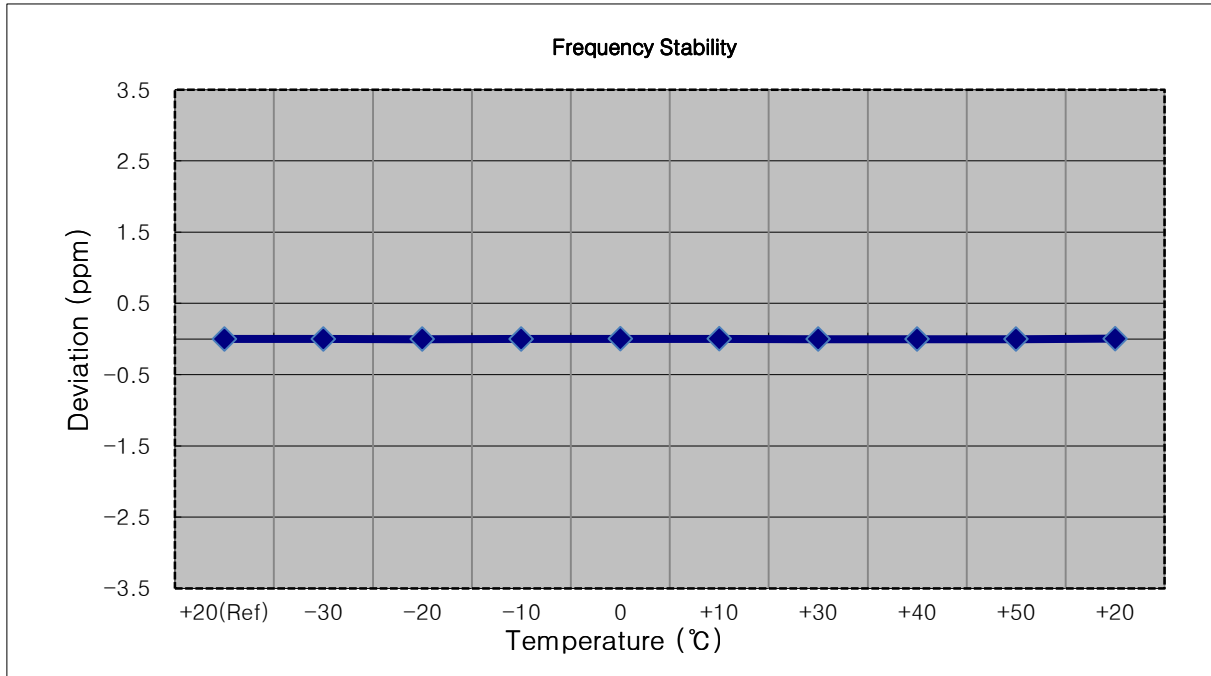


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2503,500,000 Hz
- ▣ BANDWIDTH: 39725 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2503 500 008	0.0	0.000 000	0.000
100%		-30	2503 500 002	-5.9	0.000 000	-0.002
100%		-20	2503 500 017	9.4	0.000 000	0.004
100%		-10	2503 500 012	4.2	0.000 000	0.002
100%		0	2503 499 997	-11.1	0.000 000	-0.004
100%		+10	2503 500 006	-1.6	0.000 000	-0.001
100%		+30	2503 500 012	4.2	0.000 000	0.002
100%		+40	2503 500 000	-8.3	0.000 000	-0.003
100%		+50	2503 500 002	-6.4	0.000 000	-0.003
85%	3.400	+20	2503 500 001	-6.6	0.000 000	-0.003

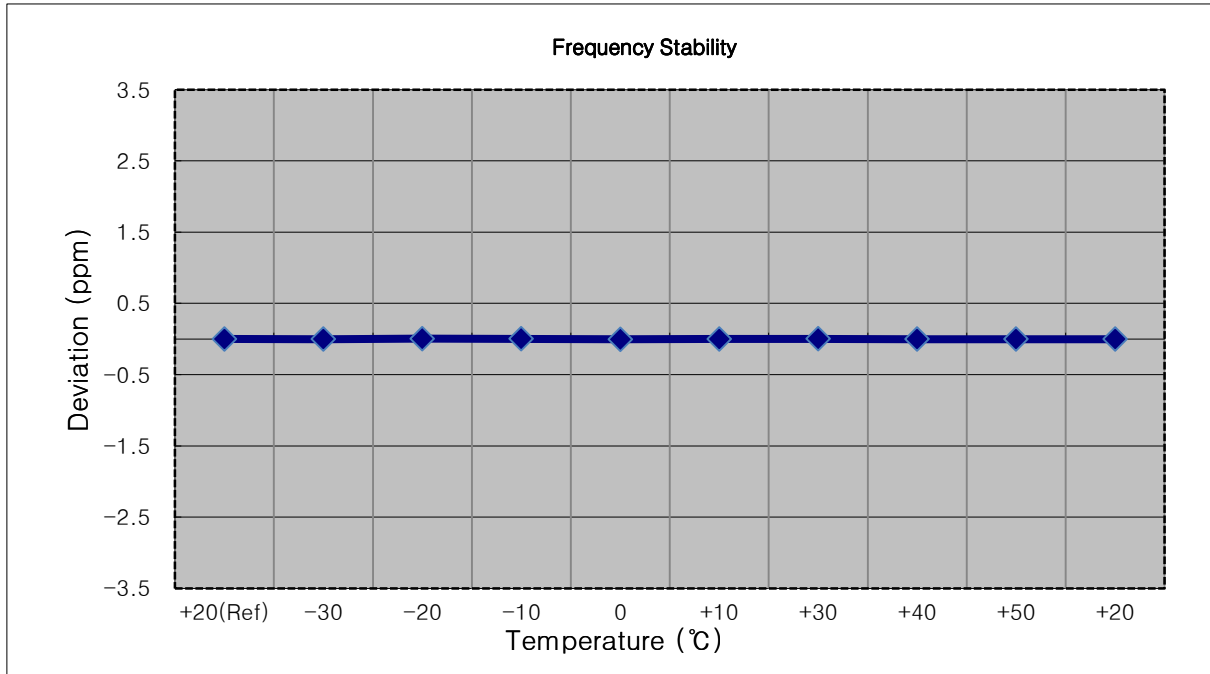


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2506,000,000 Hz
- ▣ BANDWIDTH: 39750 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2506 000 003	0.0	0.000 000	0.000
100%		-30	2505 999 995	-7.7	0.000 000	-0.003
100%		-20	2505 999 998	-5.5	0.000 000	-0.002
100%		-10	2505 999 996	-7.1	0.000 000	-0.003
100%		0	2506 000 007	3.8	0.000 000	0.002
100%		+10	2506 000 009	6.4	0.000 000	0.003
100%		+30	2506 000 015	11.5	0.000 000	0.005
100%		+40	2505 999 997	-6.4	0.000 000	-0.003
100%		+50	2506 000 013	10.2	0.000 000	0.004
85%	3.400	+20	2505 999 993	-9.6	0.000 000	-0.004

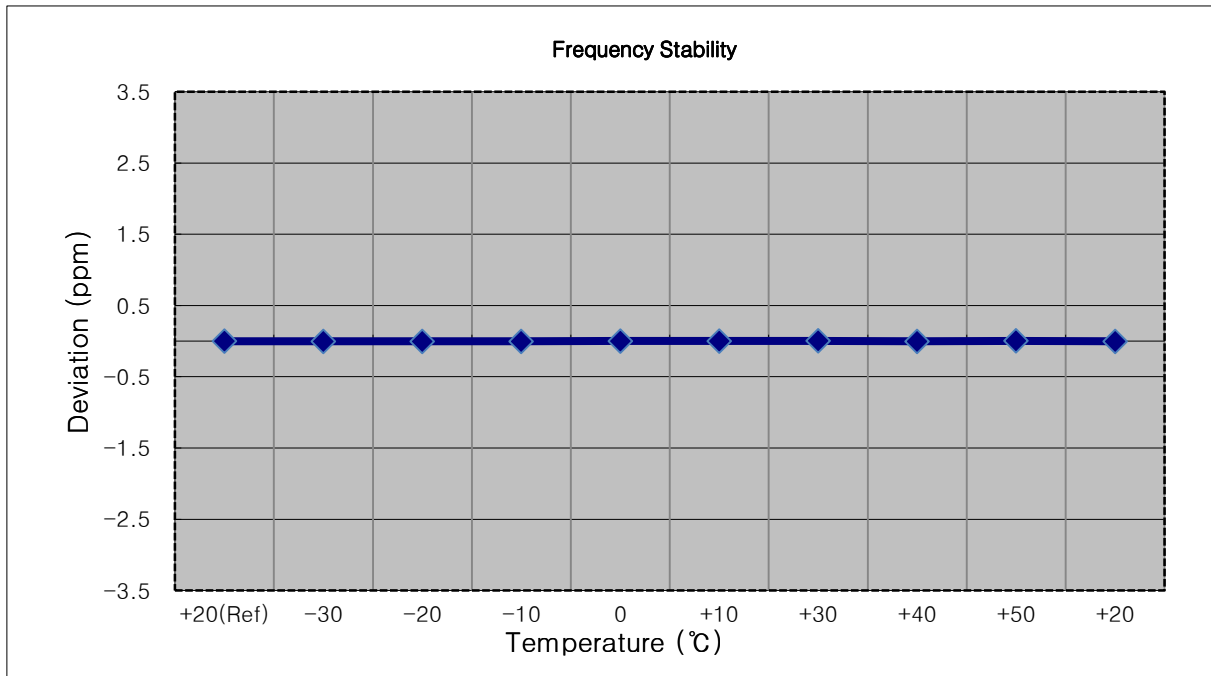


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2592 999 987	0.0	0.000 000	0.000
100%		-30	2592 999 980	-7.0	0.000 000	-0.003
100%		-20	2592 999 977	-9.9	0.000 000	-0.004
100%		-10	2592 999 970	-16.6	-0.000 001	-0.006
100%		0	2592 999 991	4.3	0.000 000	0.002
100%		+10	2592 999 972	-14.6	-0.000 001	-0.006
100%		+30	2592 999 994	7.0	0.000 000	0.003
100%		+40	2592 999 979	-7.5	0.000 000	-0.003
100%		+50	2592 999 981	-6.3	0.000 000	-0.002
85%	3.400	+20	2592 999 993	6.3	0.000 000	0.002

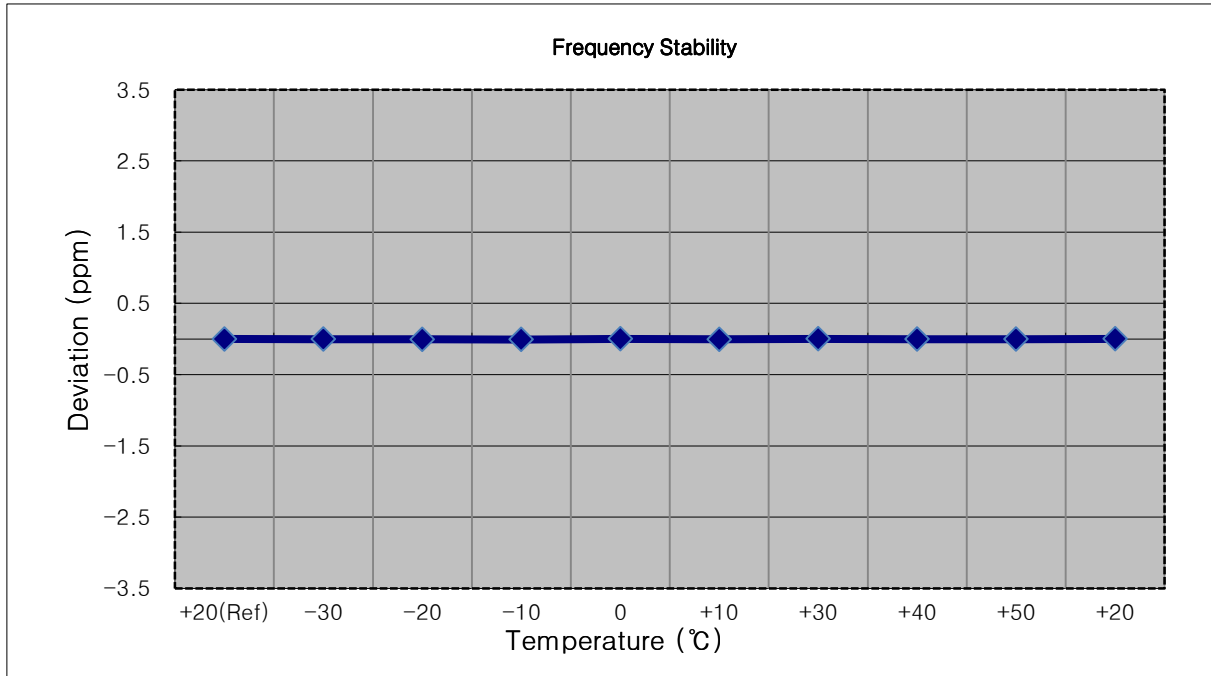


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2592 999 991	0.0	0.000 000	0.000
100%		-30	2592 999 976	-14.8	-0.000 001	-0.006
100%		-20	2592 999 977	-13.8	-0.000 001	-0.005
100%		-10	2592 999 978	-12.9	0.000 000	-0.005
100%		0	2592 999 994	3.4	0.000 000	0.001
100%		+10	2592 999 979	-11.7	0.000 000	-0.005
100%		+30	2592 999 984	-6.5	0.000 000	-0.003
100%		+40	2592 999 985	-5.6	0.000 000	-0.002
100%		+50	2592 999 977	-13.8	-0.000 001	-0.005
85%	3.400	+20	2592 999 998	7.7	0.000 000	0.003

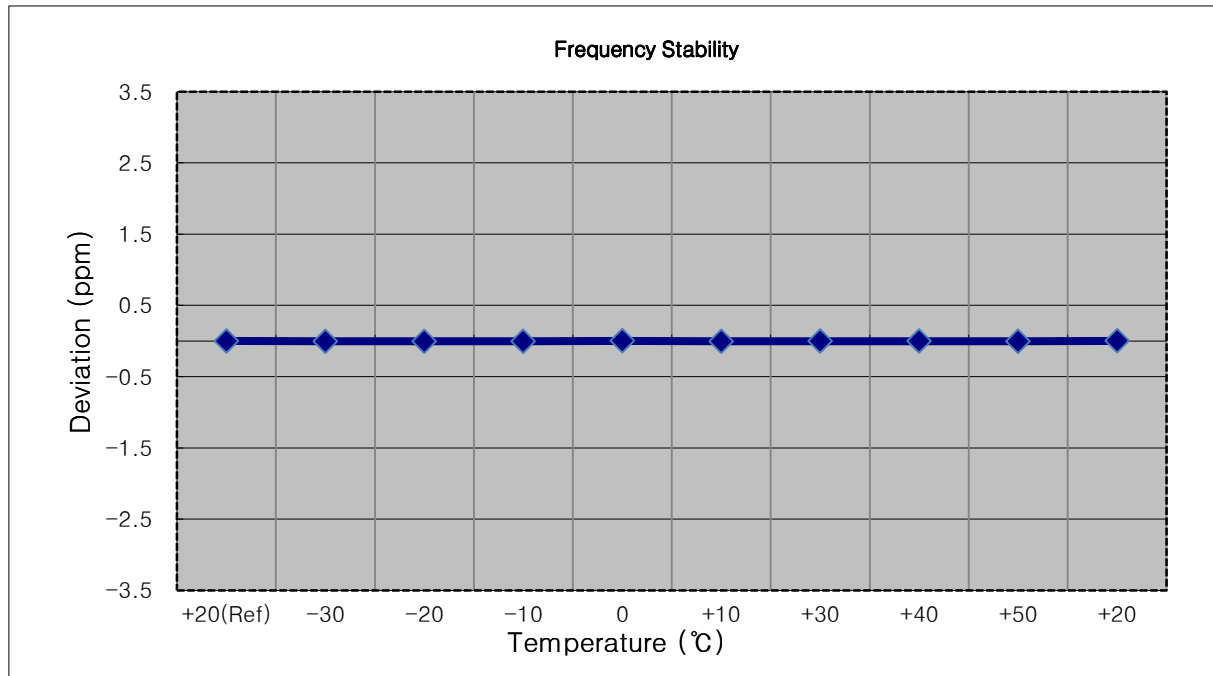

- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2592 999 994	0.0	0.000 000	0.000
100%		-30	2592 999 984	-9.4	0.000 000	-0.004
100%		-20	2592 999 990	-3.5	0.000 000	-0.001
100%		-10	2592 999 990	-3.7	0.000 000	-0.001
100%		0	2592 999 983	-10.4	0.000 000	-0.004
100%		+10	2593 000 001	7.9	0.000 000	0.003
100%		+30	2592 999 980	-13.1	-0.000 001	-0.005
100%		+40	2592 999 991	-2.4	0.000 000	-0.001
100%		+50	2592 999 985	-8.2	0.000 000	-0.003
85%	3.400	+20	2592 999 998	4.1	0.000 000	0.002

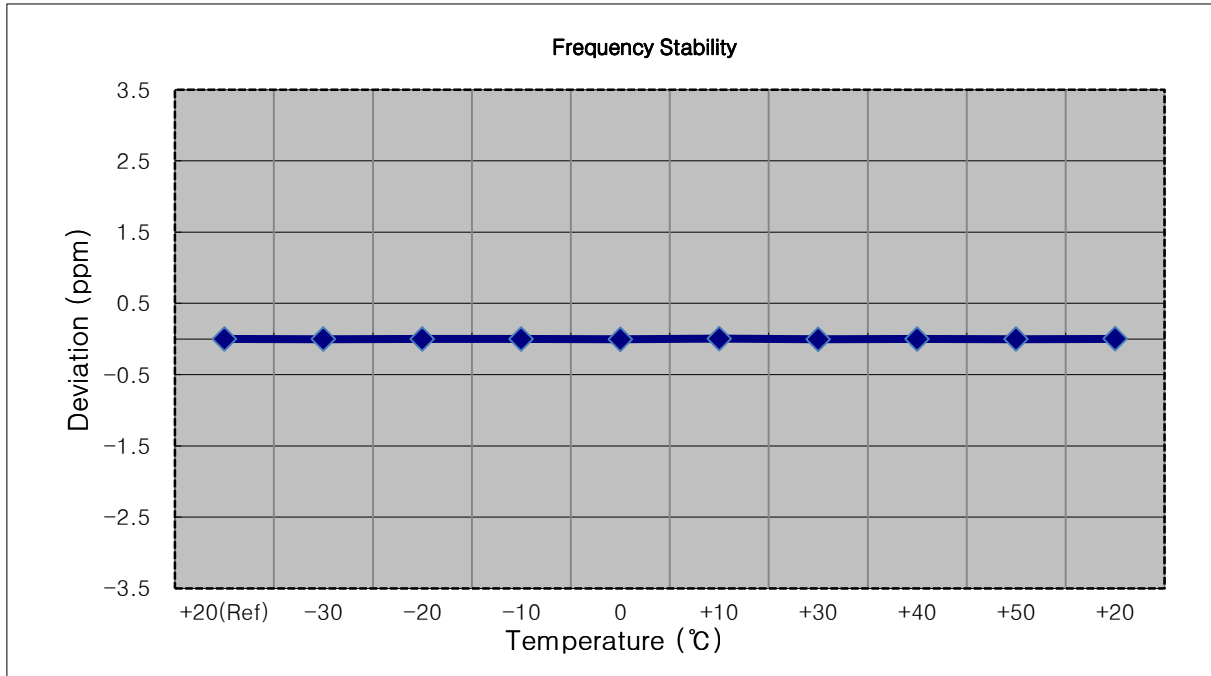




- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2592 999 989	0.0	0.000 000	0.000
100%		-30	2592 999 992	3.0	0.000 000	0.001
100%		-20	2592 999 979	-10.0	0.000 000	-0.004
100%		-10	2592 999 975	-13.8	-0.000 001	-0.005
100%		0	2592 999 981	-7.8	0.000 000	-0.003
100%		+10	2592 999 975	-13.5	-0.000 001	-0.005
100%		+30	2592 999 973	-15.4	-0.000 001	-0.006
100%		+40	2592 999 981	-8.2	0.000 000	-0.003
100%		+50	2592 999 979	-9.3	0.000 000	-0.004
85%	3.400	+20	2592 999 984	-5.0	0.000 000	-0.002

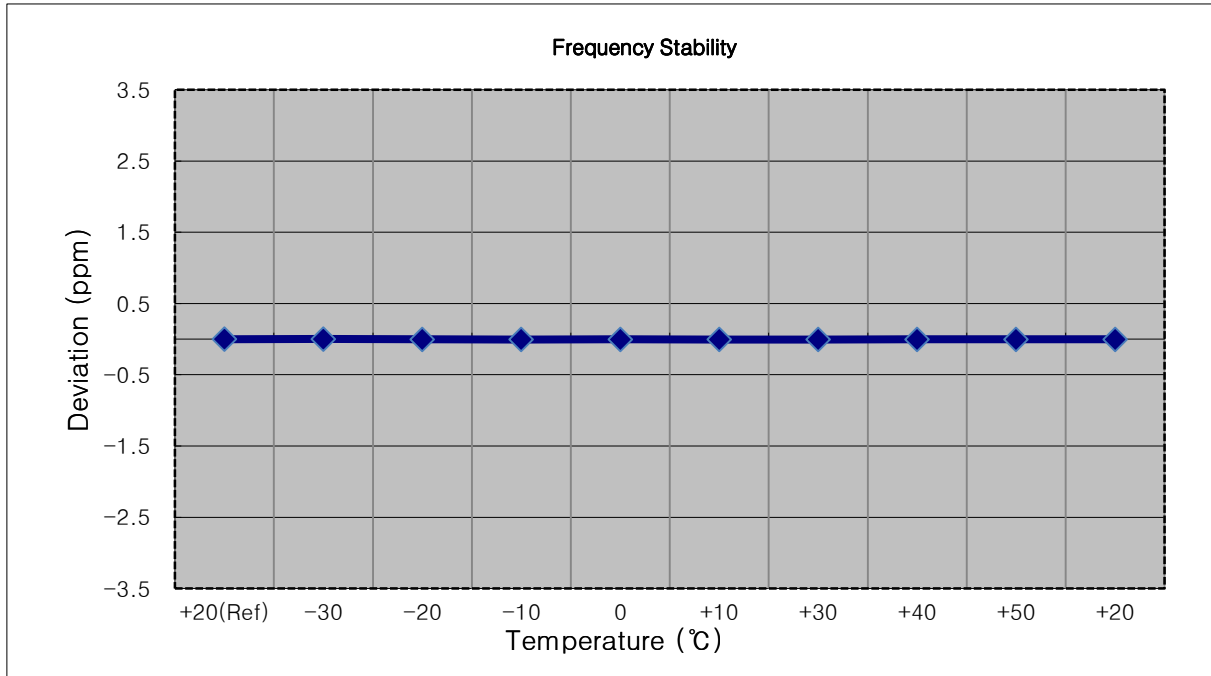


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2687,500,000 Hz
- ▣ BANDWIDTH: 41565 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2687 499 991	0.0	0.000 000	0.000
100%		-30	2687 499 979	-12.0	0.000 000	-0.004
100%		-20	2687 499 965	-25.7	-0.000 001	-0.010
100%		-10	2687 499 984	-7.3	0.000 000	-0.003
100%		0	2687 499 970	-20.6	-0.000 001	-0.008
100%		+10	2687 499 968	-23.1	-0.000 001	-0.009
100%		+30	2687 499 972	-19.4	-0.000 001	-0.007
100%		+40	2687 499 975	-15.5	-0.000 001	-0.006
100%		+50	2687 499 978	-12.8	0.000 000	-0.005
85%		3.400	+20	2687 499 979	-11.6	0.000 000

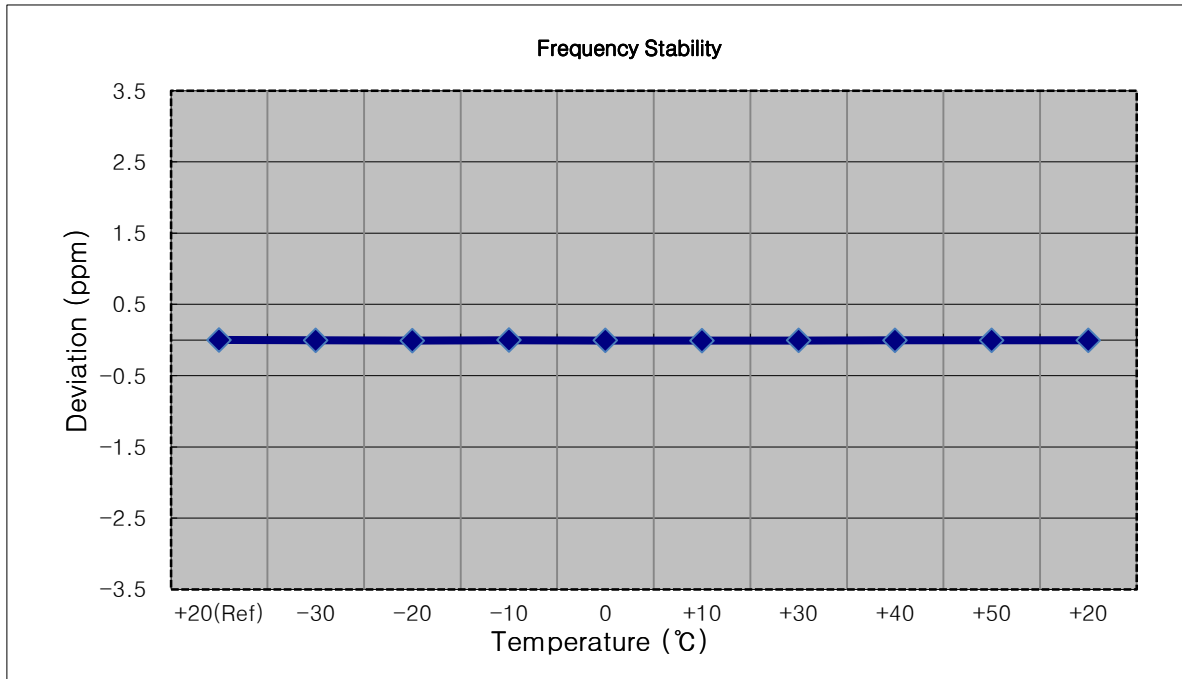


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2685,000,000 Hz
- ▣ BANDWIDTH: 41540 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2684 999 996	0.0	0.000 000	0.000
100%		-30	2684 999 991	-4.7	0.000 000	-0.002
100%		-20	2684 999 994	-2.0	0.000 000	-0.001
100%		-10	2684 999 983	-12.6	0.000 000	-0.005
100%		0	2684 999 989	-6.8	0.000 000	-0.003
100%		+10	2684 999 990	-5.5	0.000 000	-0.002
100%		+30	2684 999 981	-14.5	-0.000 001	-0.005
100%		+40	2684 999 985	-10.3	0.000 000	-0.004
100%		+50	2684 999 986	-9.3	0.000 000	-0.003
85%	3.400	+20	2684 999 985	-10.4	0.000 000	-0.004

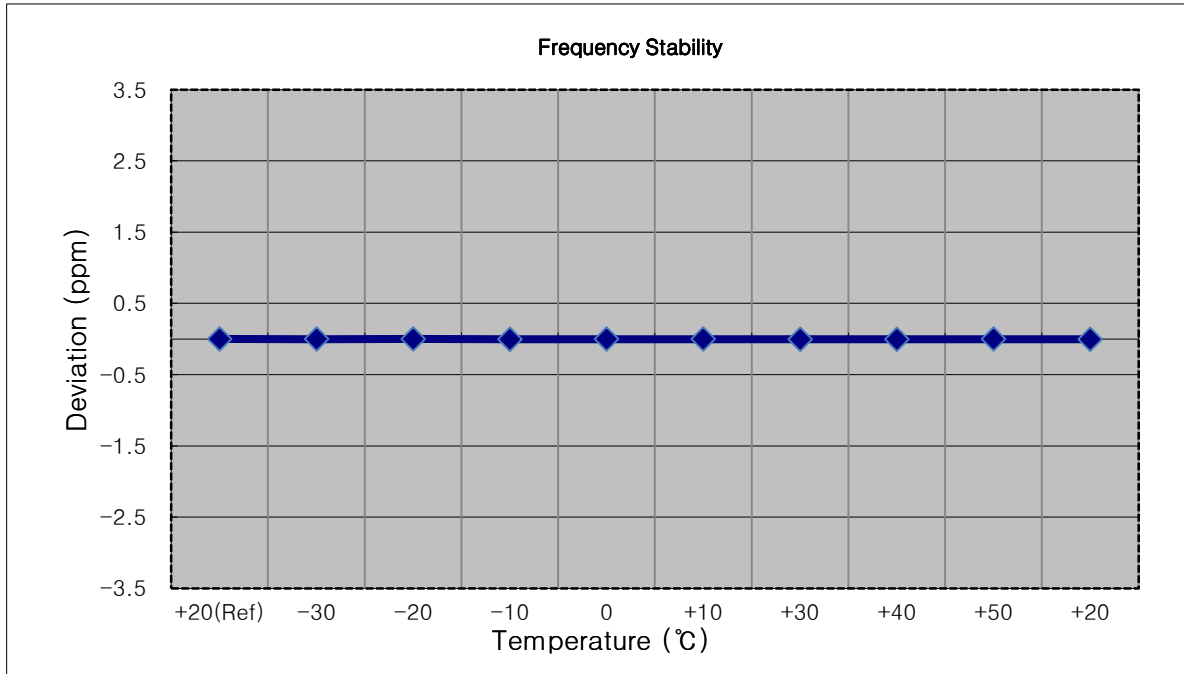


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2682,500,000 Hz
- ▣ BANDWIDTH: 41515 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2682 499 989	0.0	0.000 000	0.000
100%		-30	2682 499 980	-8.5	0.000 000	-0.003
100%		-20	2682 499 973	-15.5	-0.000 001	-0.006
100%		-10	2682 499 978	-10.8	0.000 000	-0.004
100%		0	2682 499 986	-3.0	0.000 000	-0.001
100%		+10	2682 499 973	-16.1	-0.000 001	-0.006
100%		+30	2682 499 976	-13.1	0.000 000	-0.005
100%		+40	2682 499 974	-15.3	-0.000 001	-0.006
100%		+50	2682 499 978	-11.0	0.000 000	-0.004
85%	3.400	+20	2682 499 971	-17.5	-0.000 001	-0.007

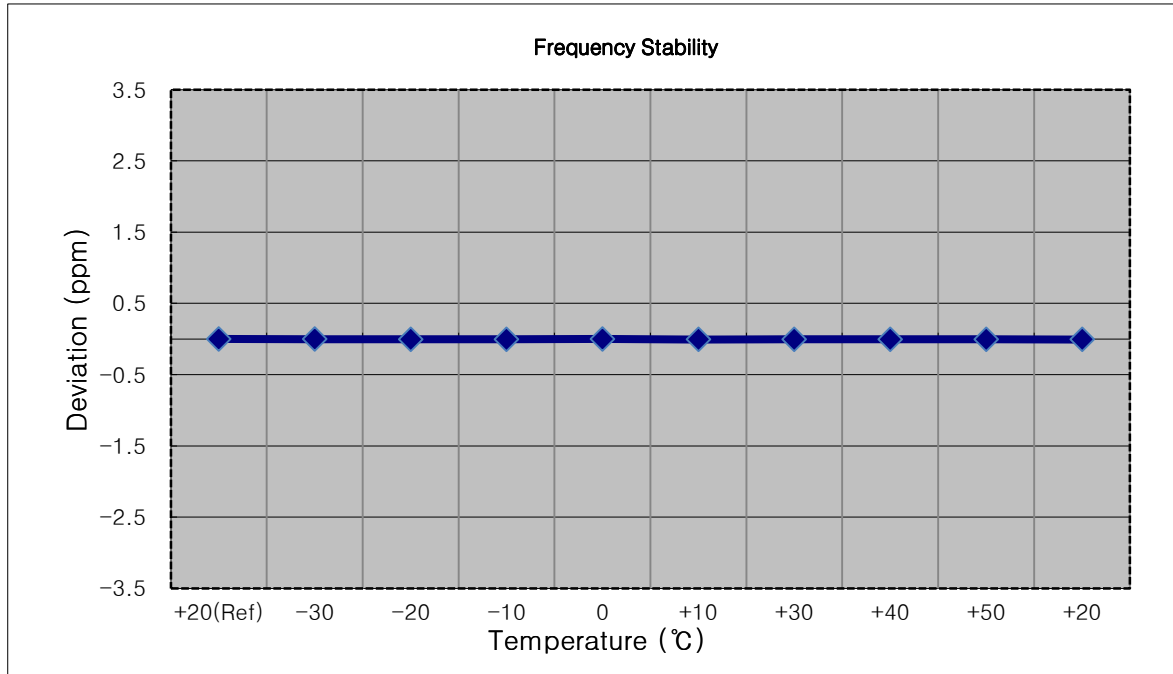


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2680,000,000 Hz
- ▣ BANDWIDTH: 41490 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2679 999 991	0.0	0.000 000	0.000
100%		-30	2679 999 978	-12.3	0.000 000	-0.005
100%		-20	2679 999 993	2.7	0.000 000	0.001
100%		-10	2679 999 978	-12.7	0.000 000	-0.005
100%		0	2679 999 985	-5.5	0.000 000	-0.002
100%		+10	2679 999 982	-9.0	0.000 000	-0.003
100%		+30	2679 999 979	-11.8	0.000 000	-0.004
100%		+40	2679 999 977	-14.0	-0.000 001	-0.005
100%		+50	2679 999 989	-1.8	0.000 000	-0.001
85%	3.400	+20	2679 999 988	-2.7	0.000 000	-0.001

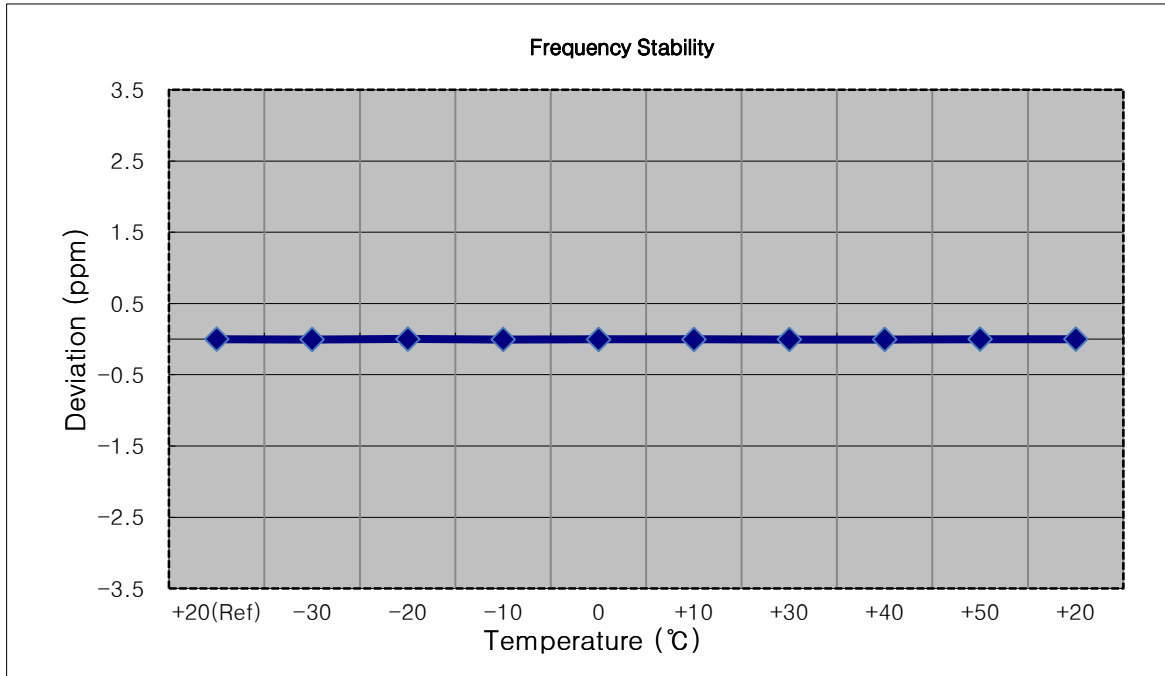


## 9. TEST PLOTS

Occupied Bandwidth Plot (5 MHz Ch.40620 QPSK RB 25) (POWER CLASS 3)

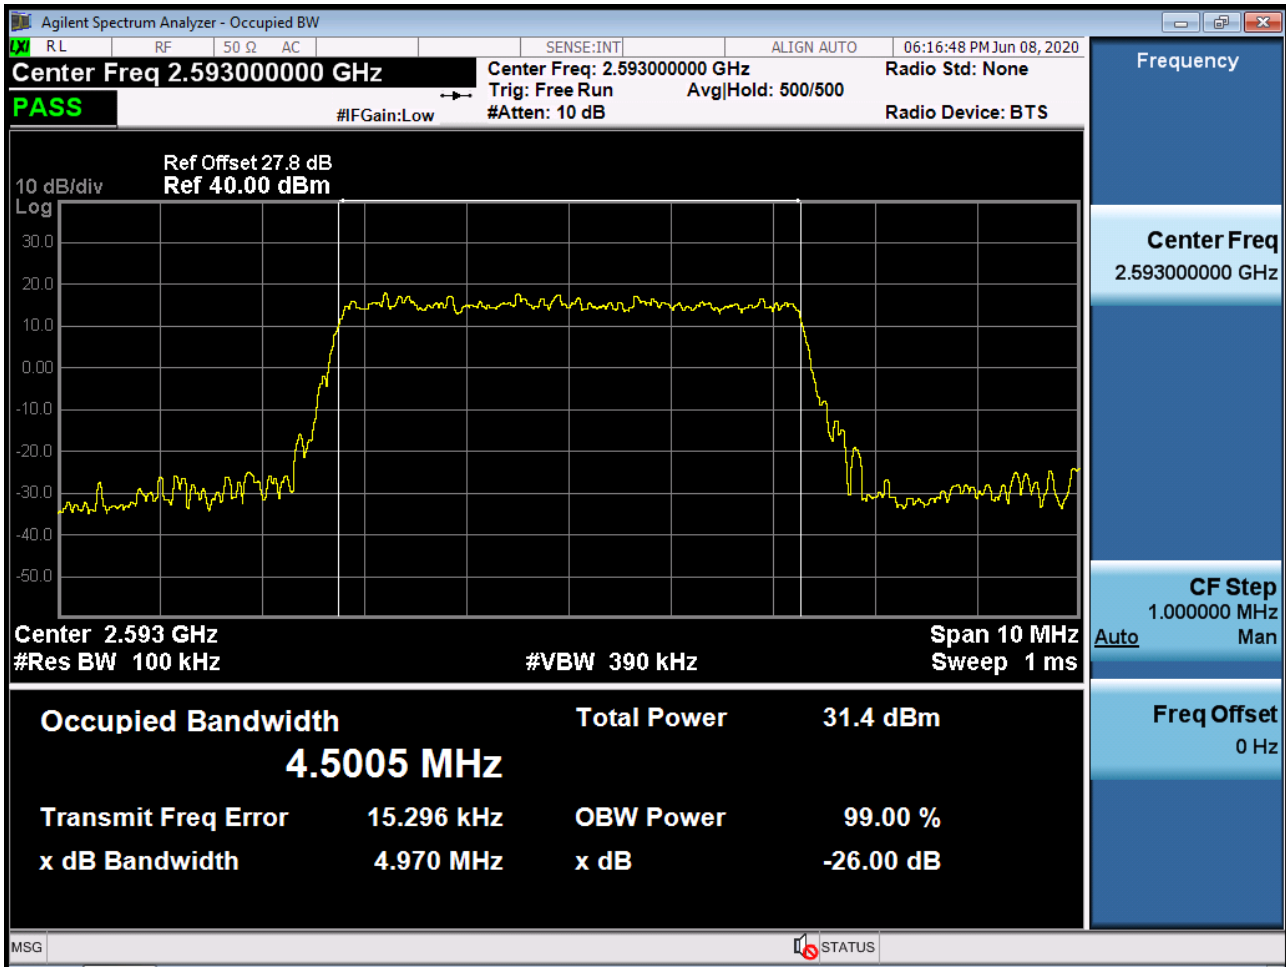


Occupied Bandwidth Plot (5 MHz Ch.40620 16-QAM RB 25) (POWER CLASS 3)

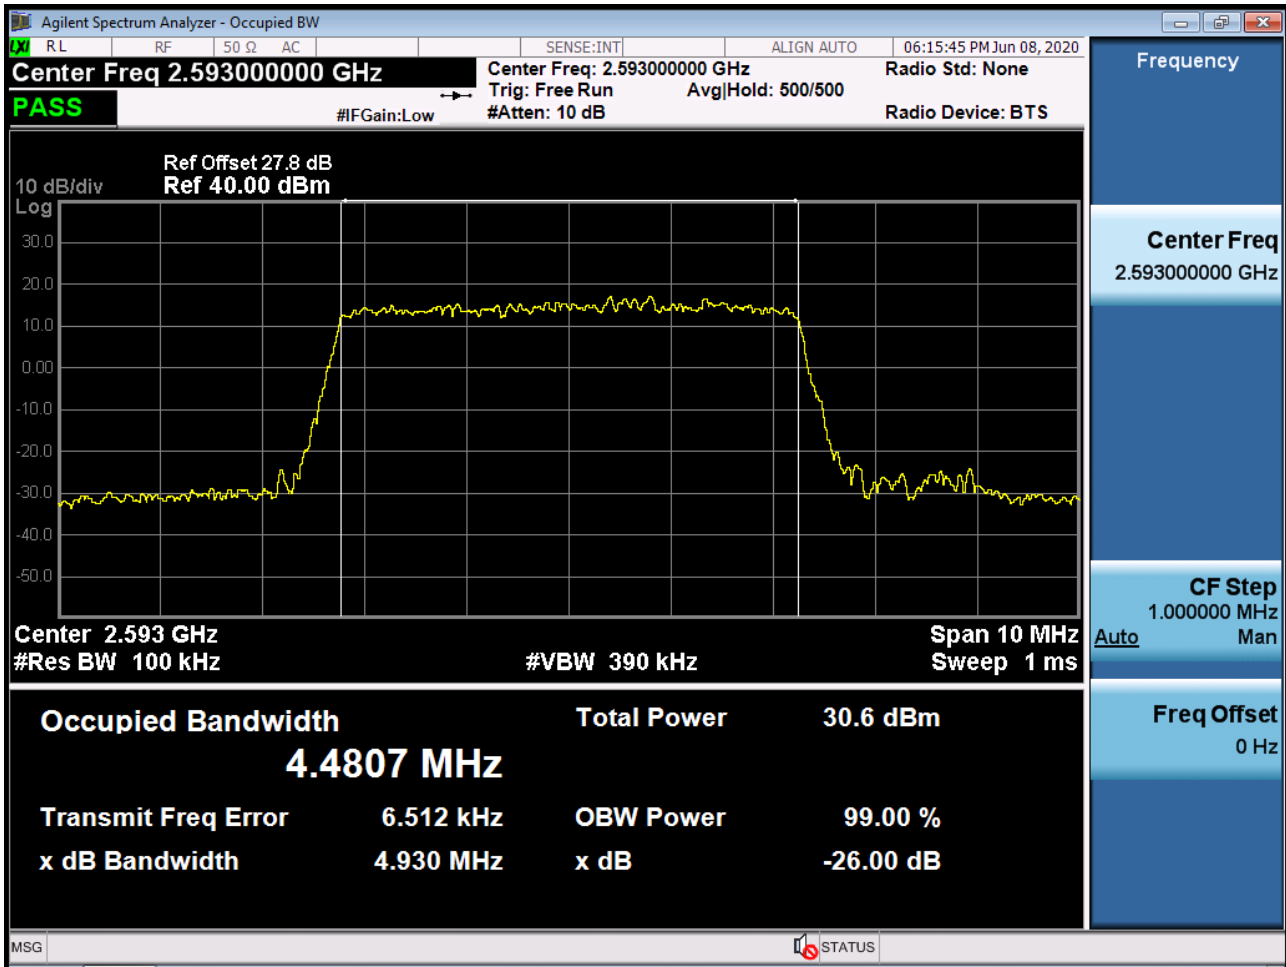





Occupied Bandwidth Plot (5 MHz Ch.40620 64-QAM RB 25) (POWER CLASS 3)

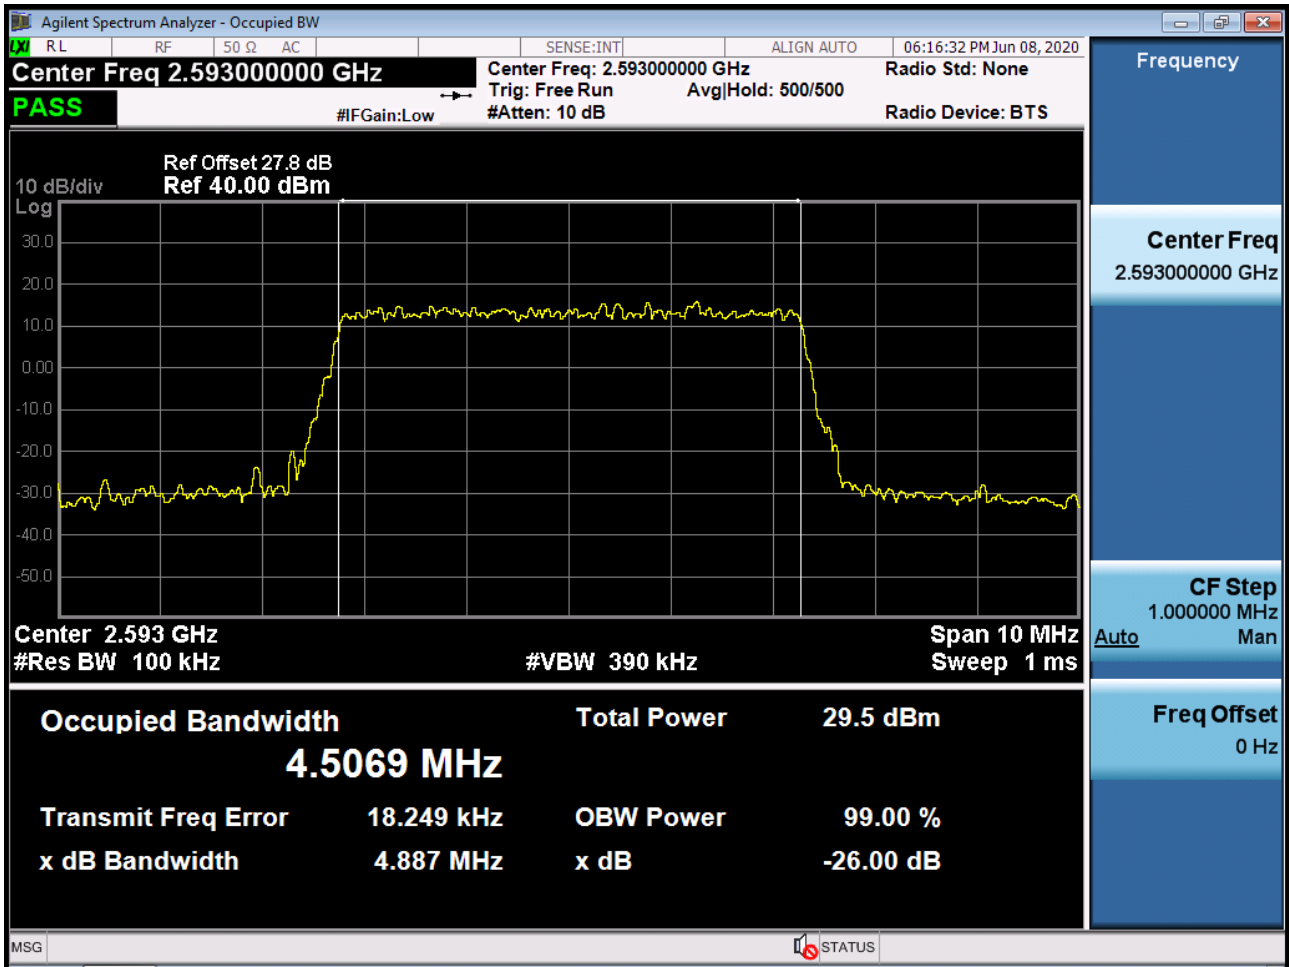


Occupied Bandwidth Plot (5 MHz Ch.40620 256-QAM RB 25) (POWER CLASS 3)

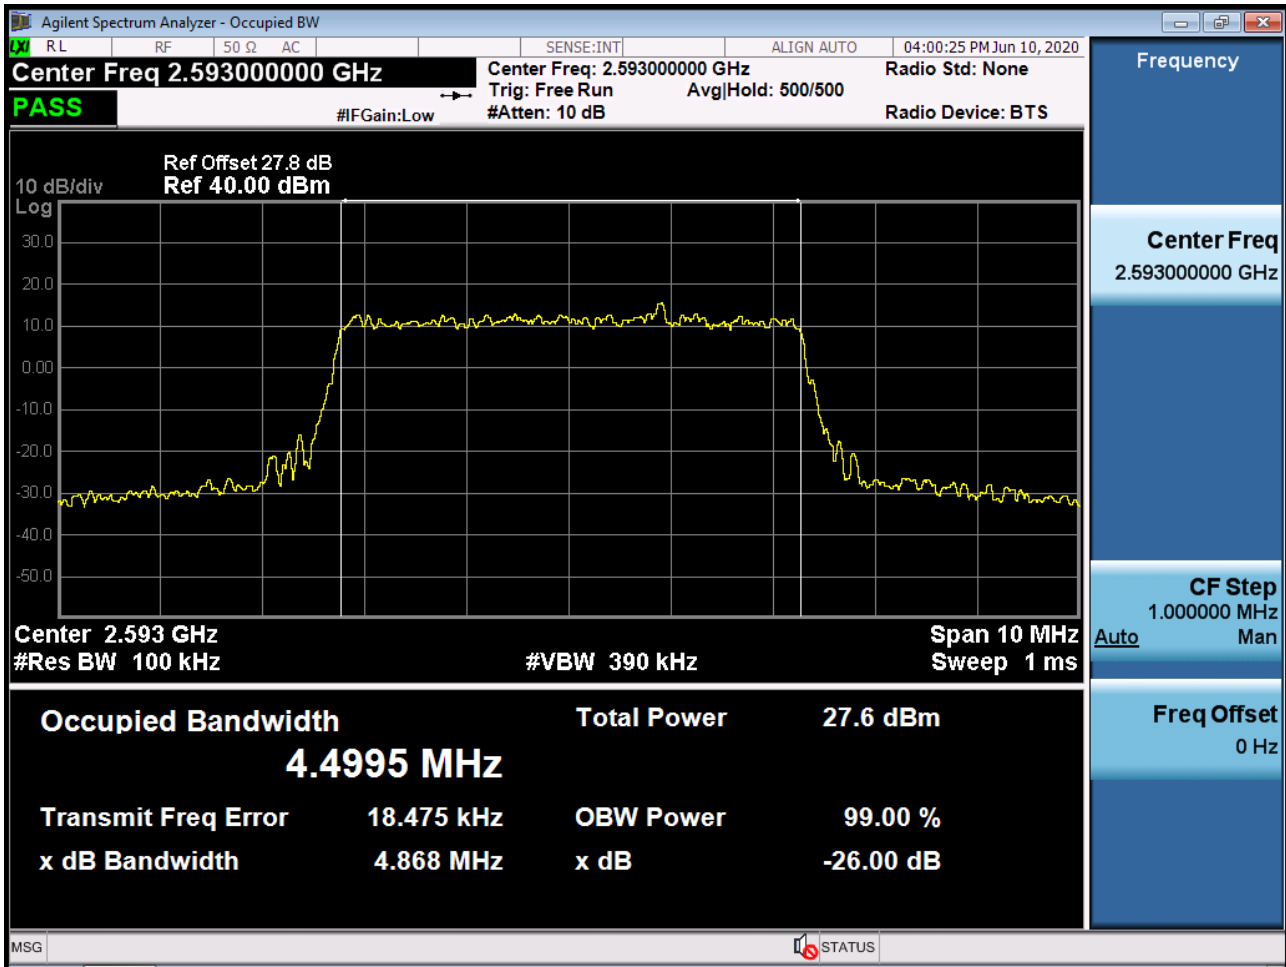


Occupied Bandwidth Plot (10 MHz Ch.40620 QPSK RB 50) (POWER CLASS 3)

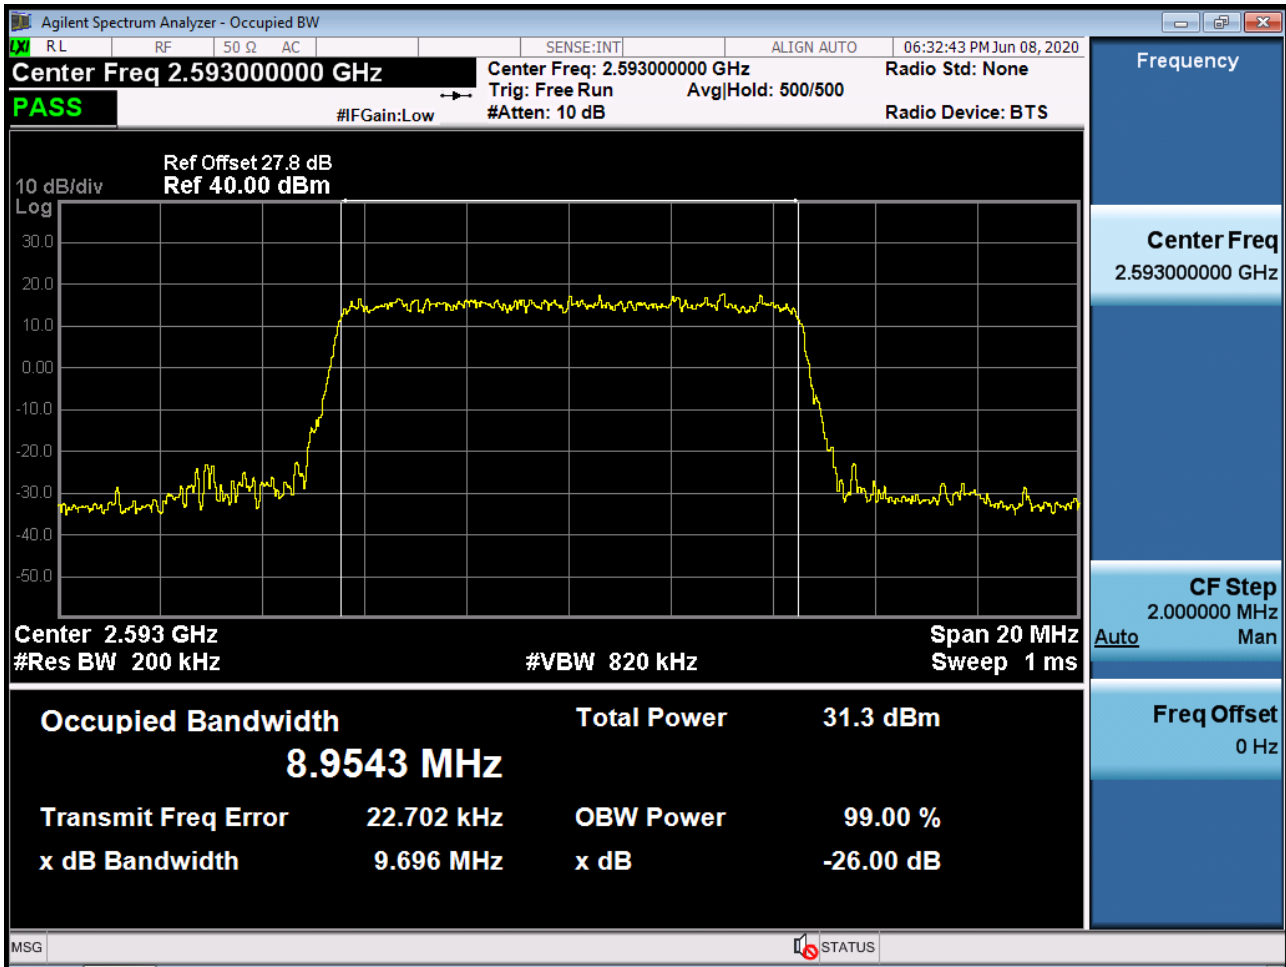


Occupied Bandwidth Plot (10 MHz Ch.40620 16-QAM RB 50) (POWER CLASS 3)

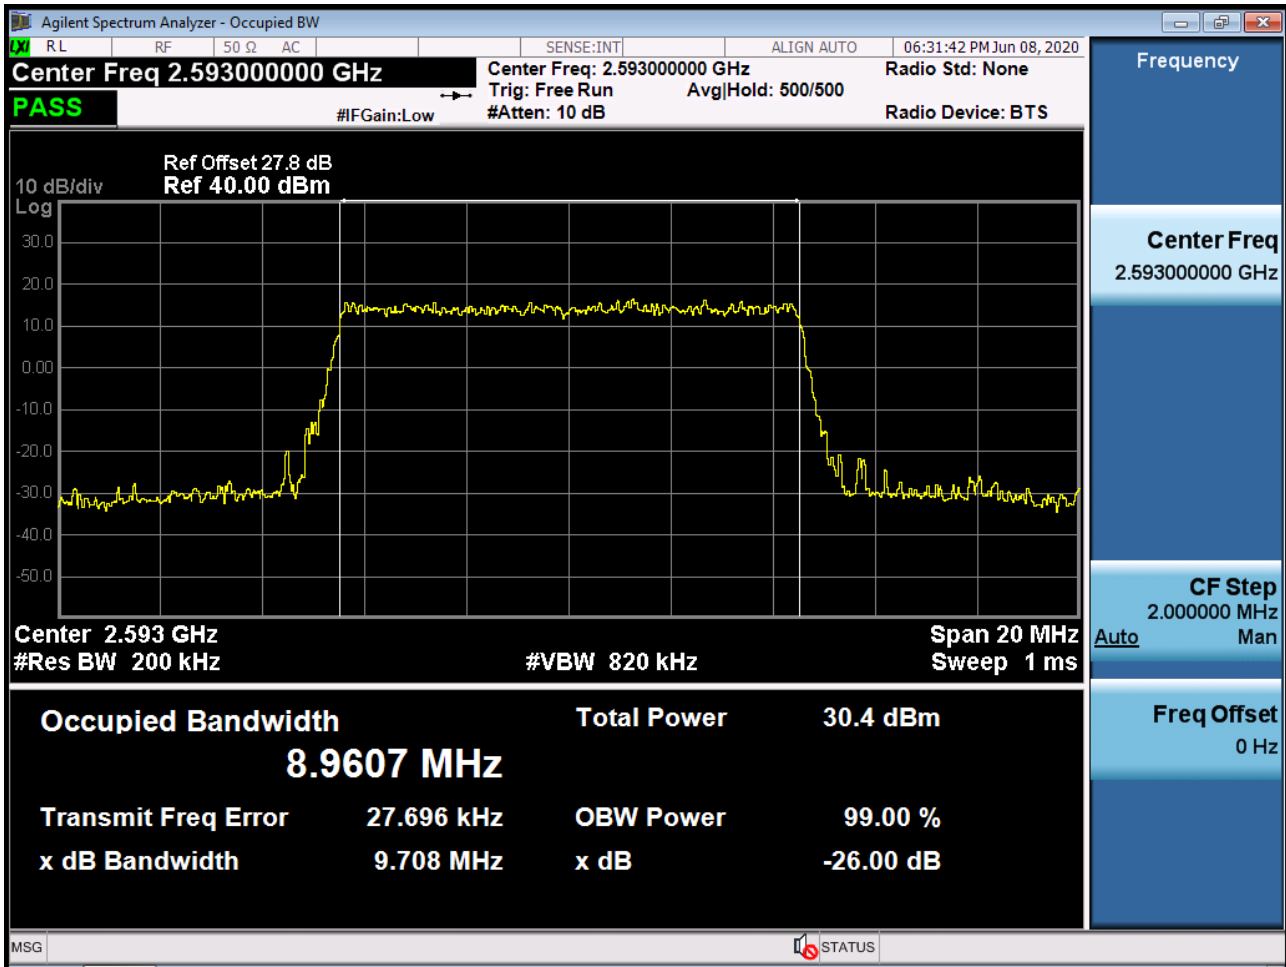


Occupied Bandwidth Plot (10 MHz Ch.40620 64-QAM RB 50) (POWER CLASS 3)

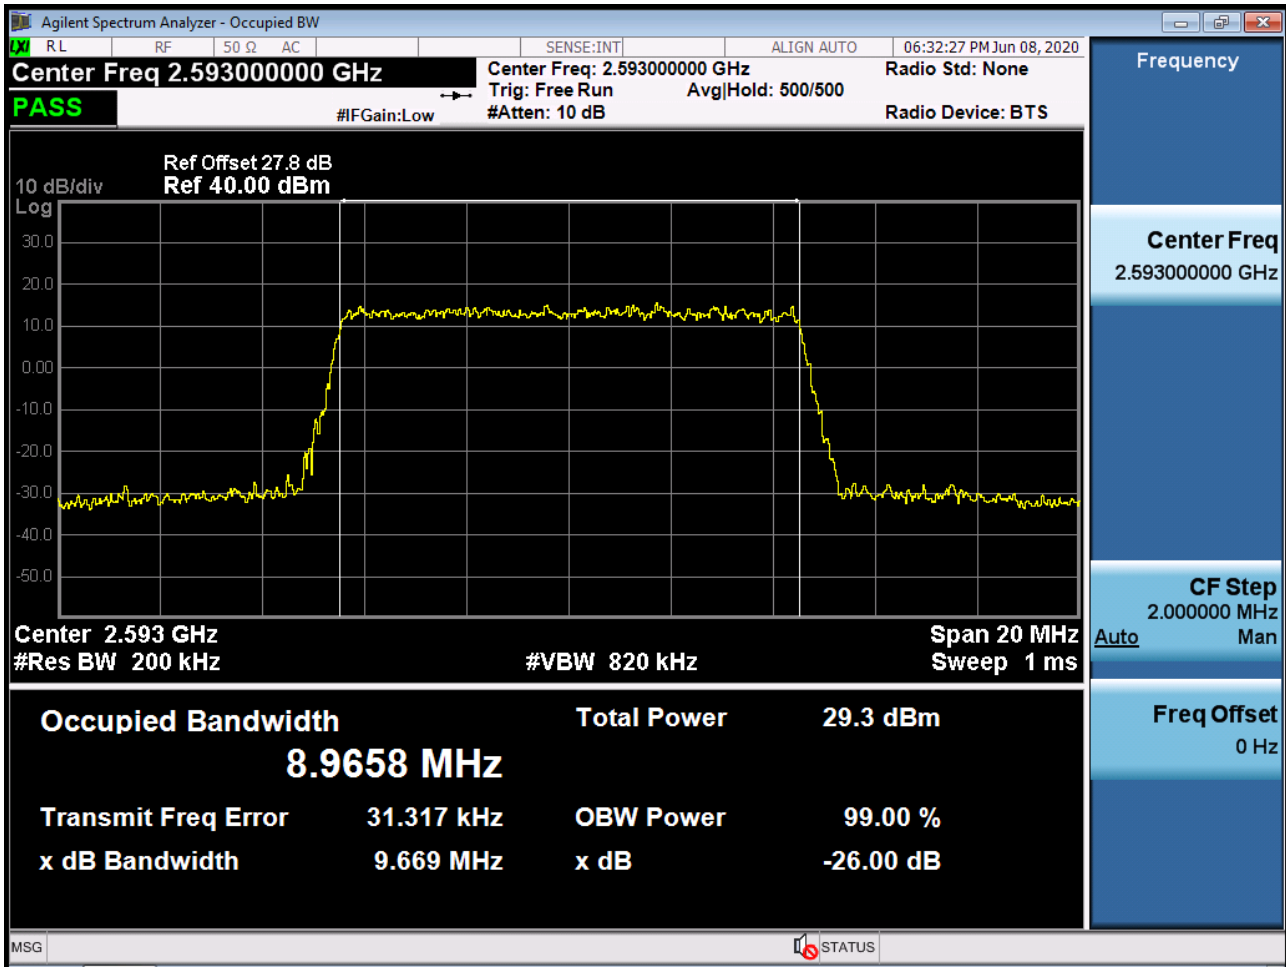


Occupied Bandwidth Plot (10 MHz Ch.40620 256-QAM RB 50) (POWER CLASS 3)

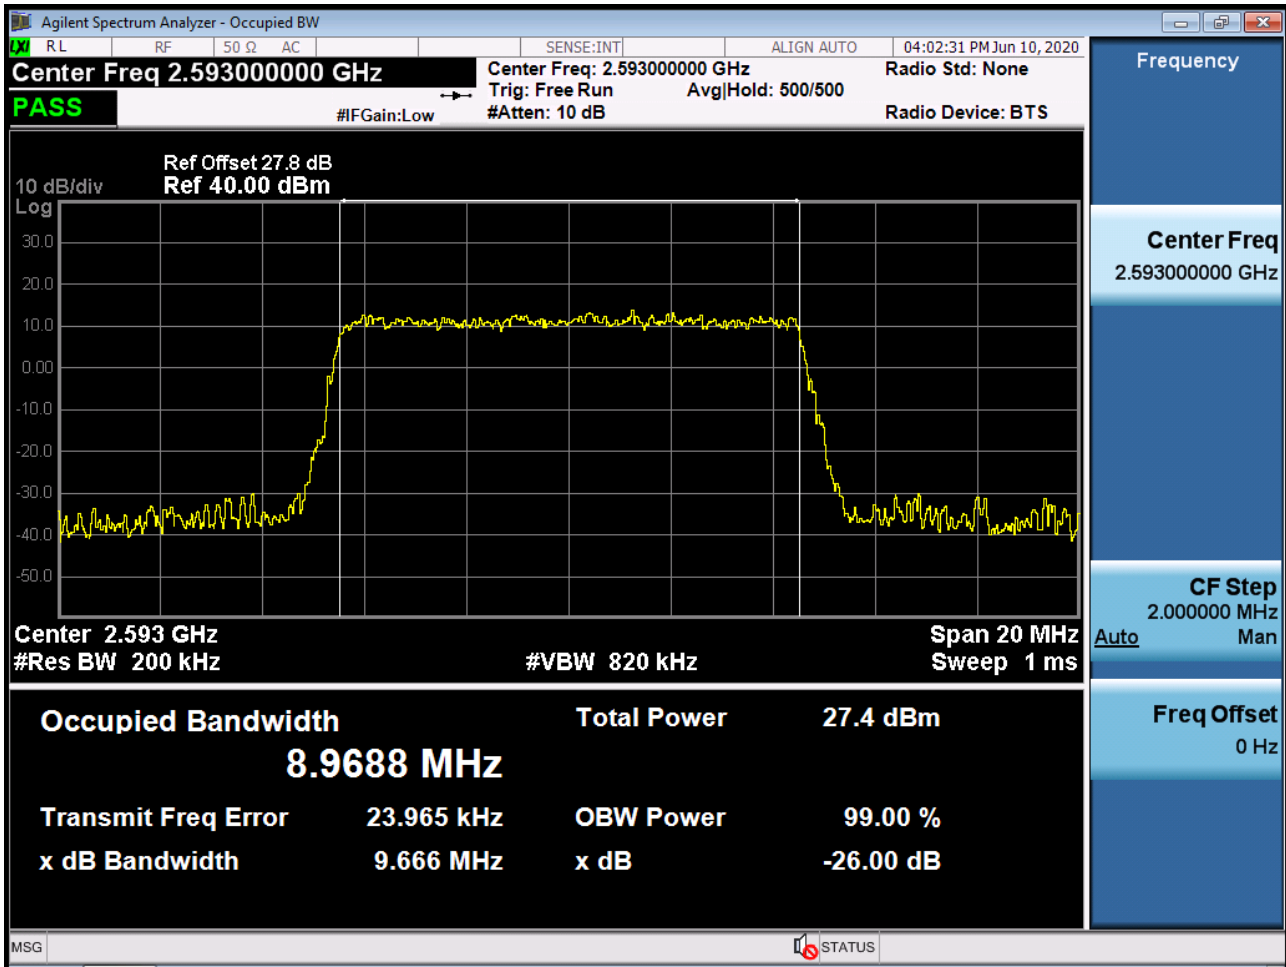

Occupied Bandwidth Plot (15 MHz Ch.40620 QPSK RB 75) (POWER CLASS 3)

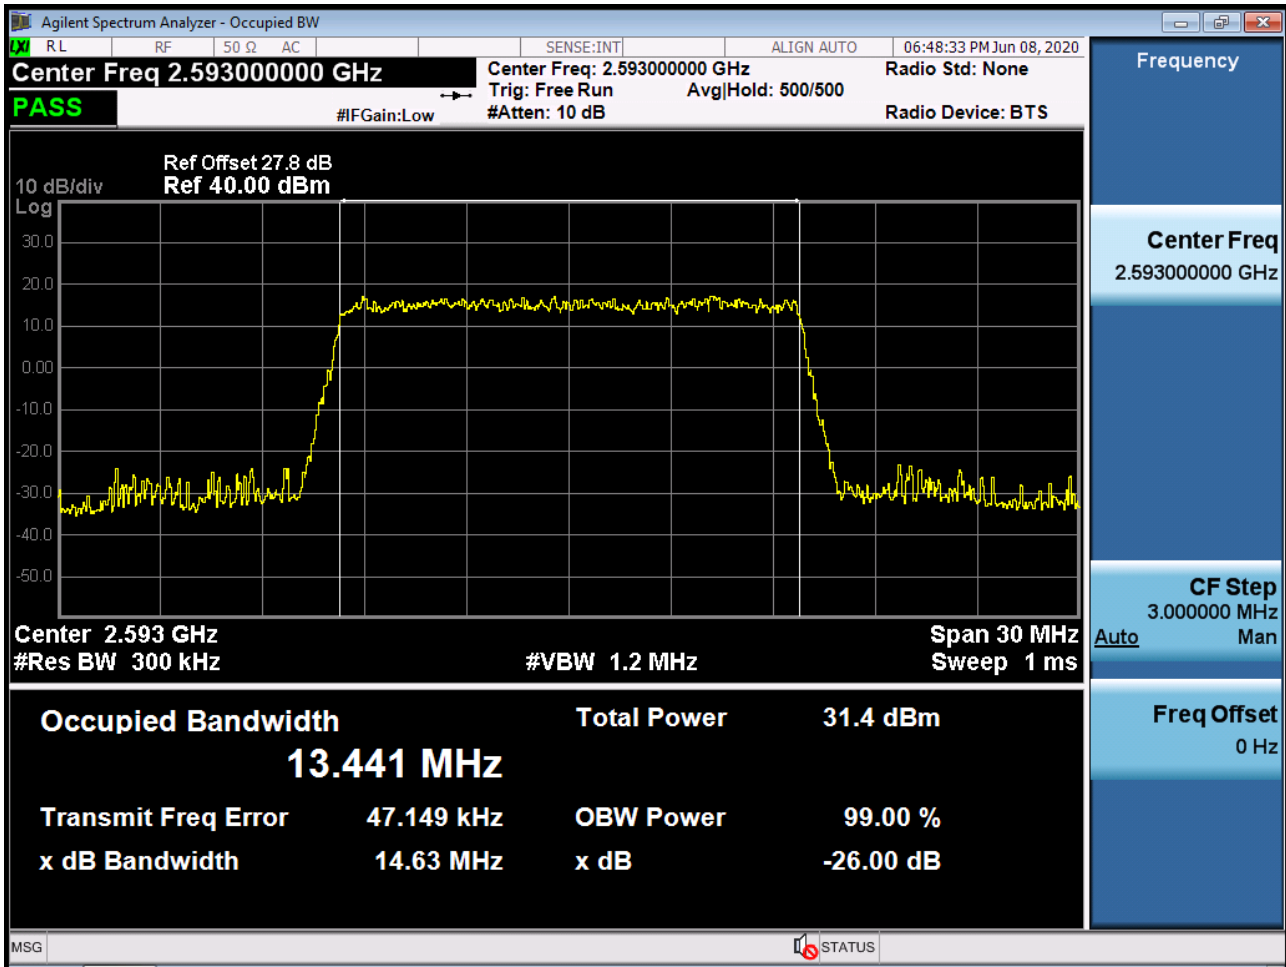


Occupied Bandwidth Plot (15 MHz Ch.40620 16-QAM RB 75) (POWER CLASS 3)

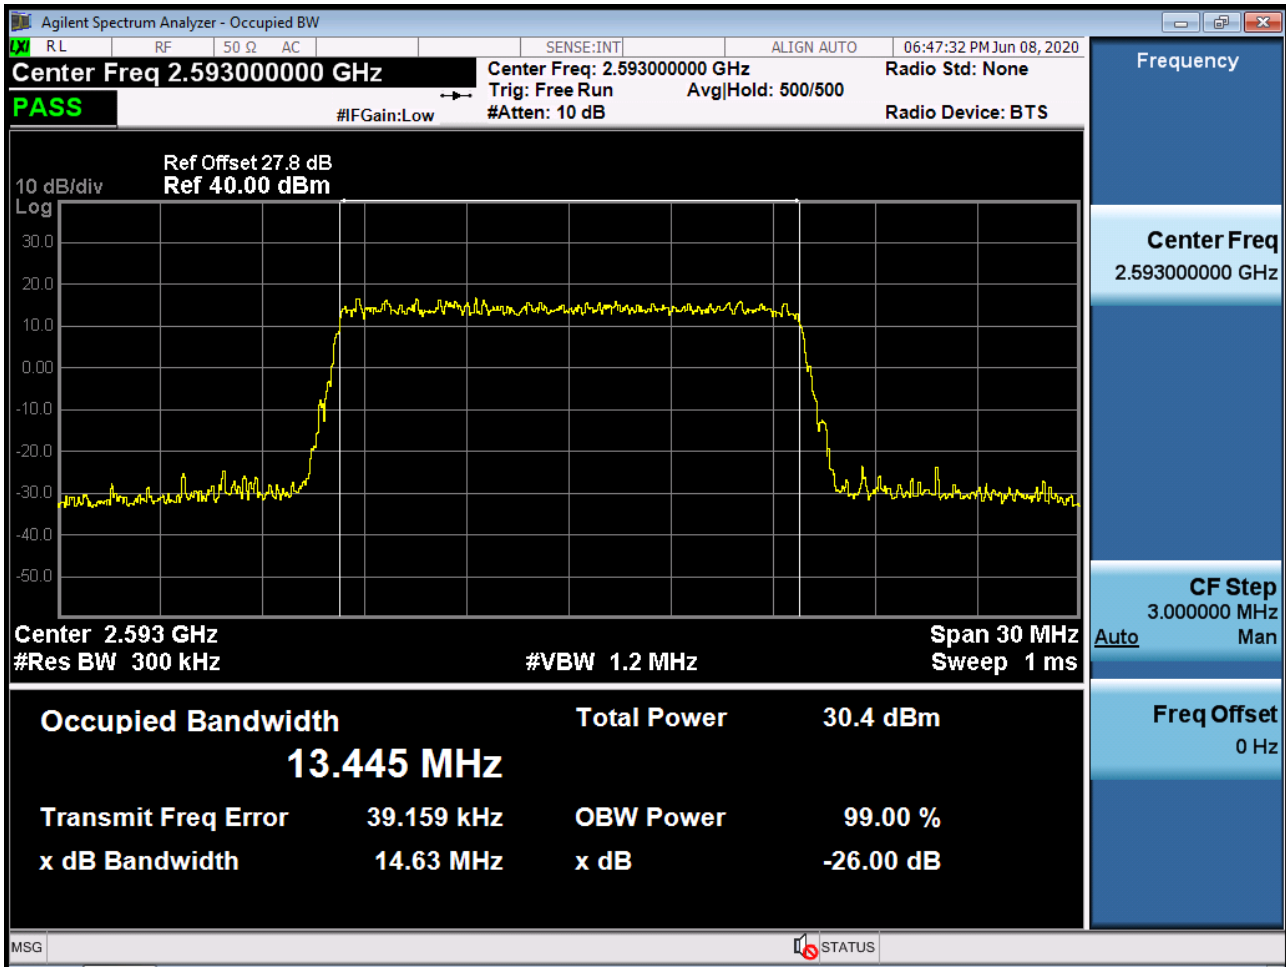





Occupied Bandwidth Plot (15 MHz Ch.40620 64-QAM RB 75) (POWER CLASS 3)

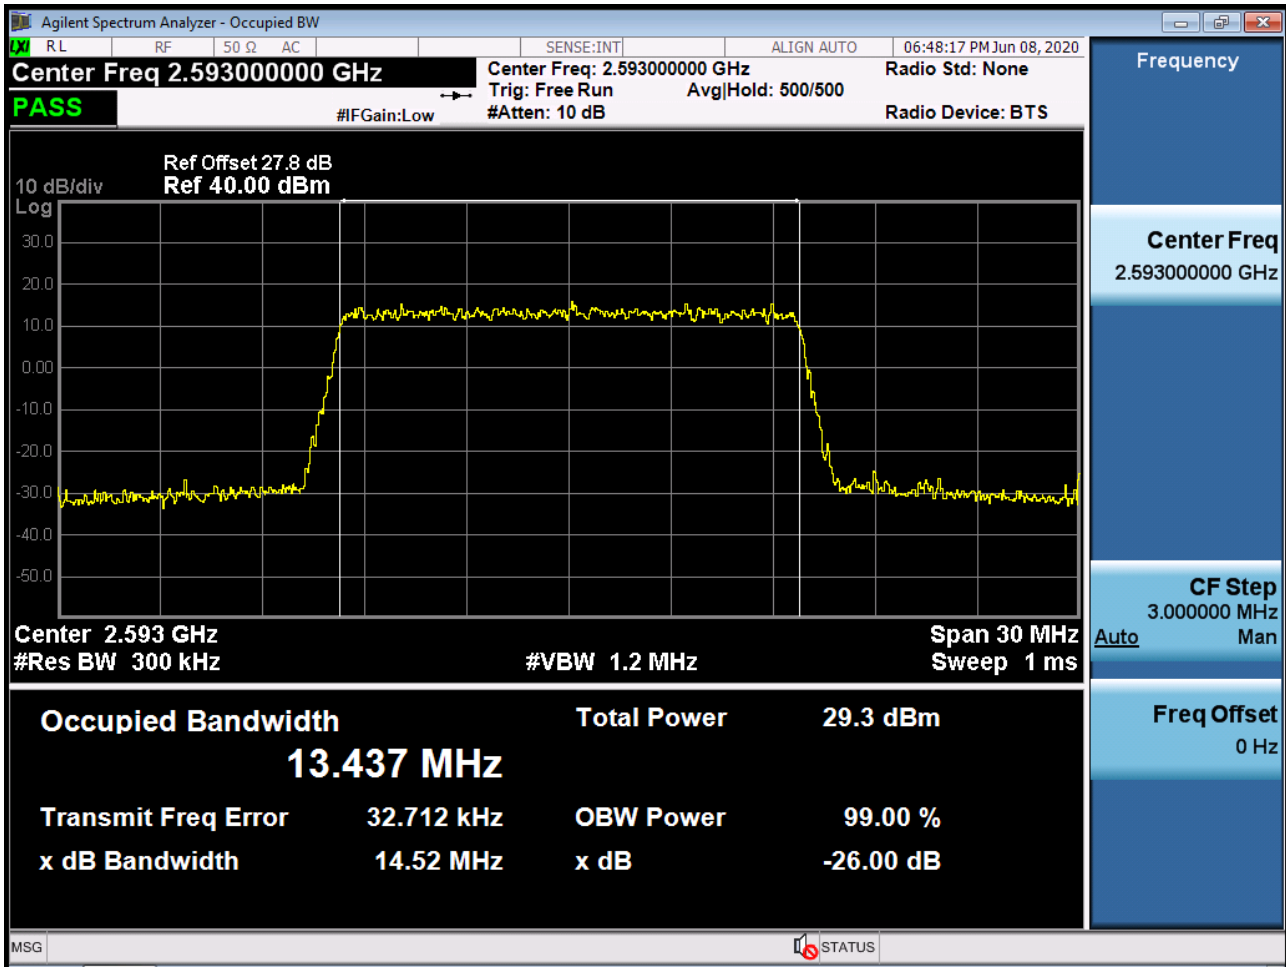


Occupied Bandwidth Plot (15 MHz Ch.40620 256-QAM RB 75) (POWER CLASS 3)

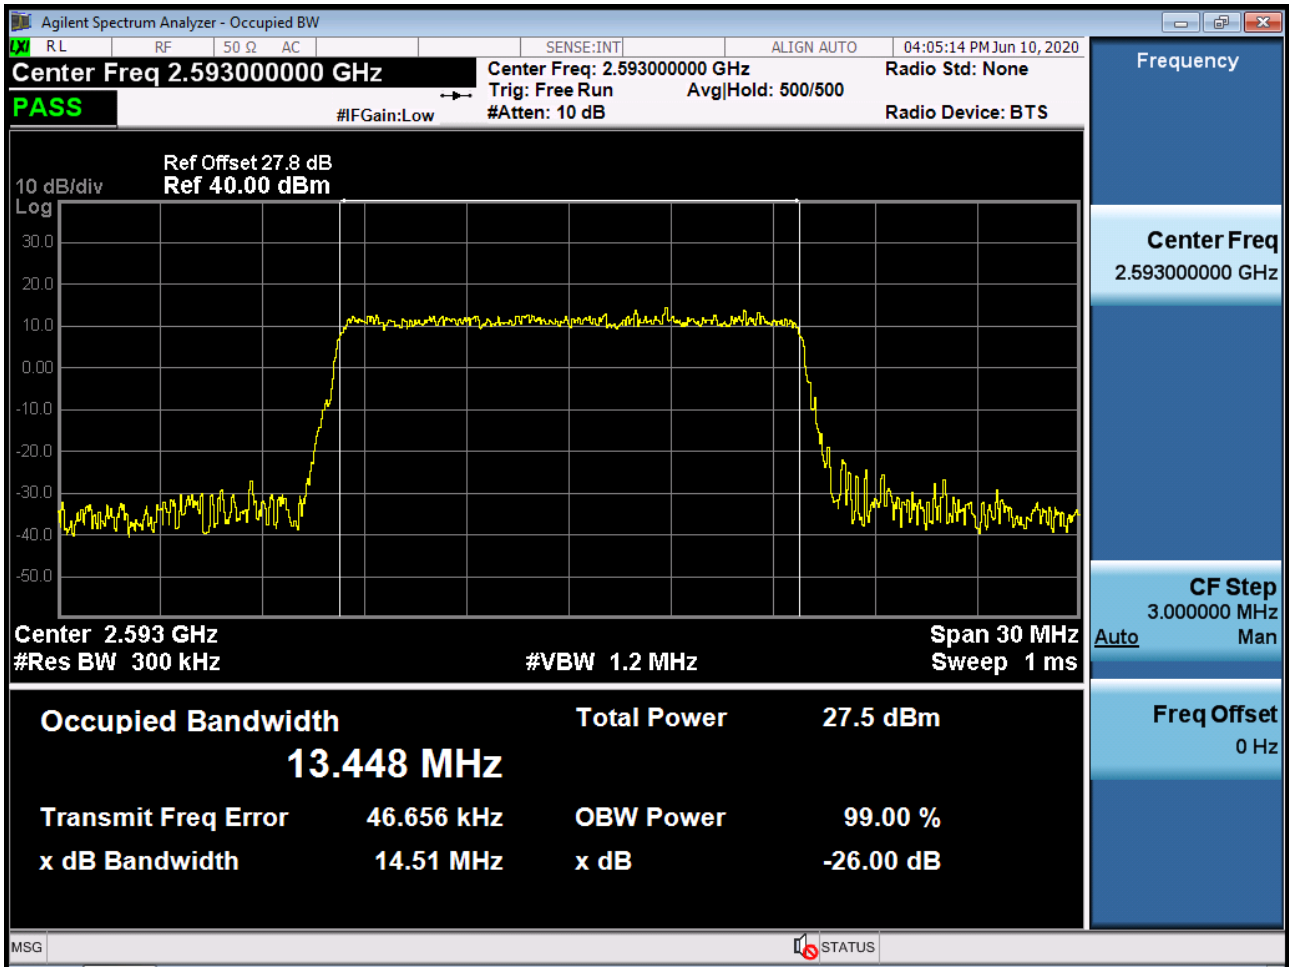


Occupied Bandwidth Plot (20 MHz Ch.40620 QPSK RB 100) (POWER CLASS 3)

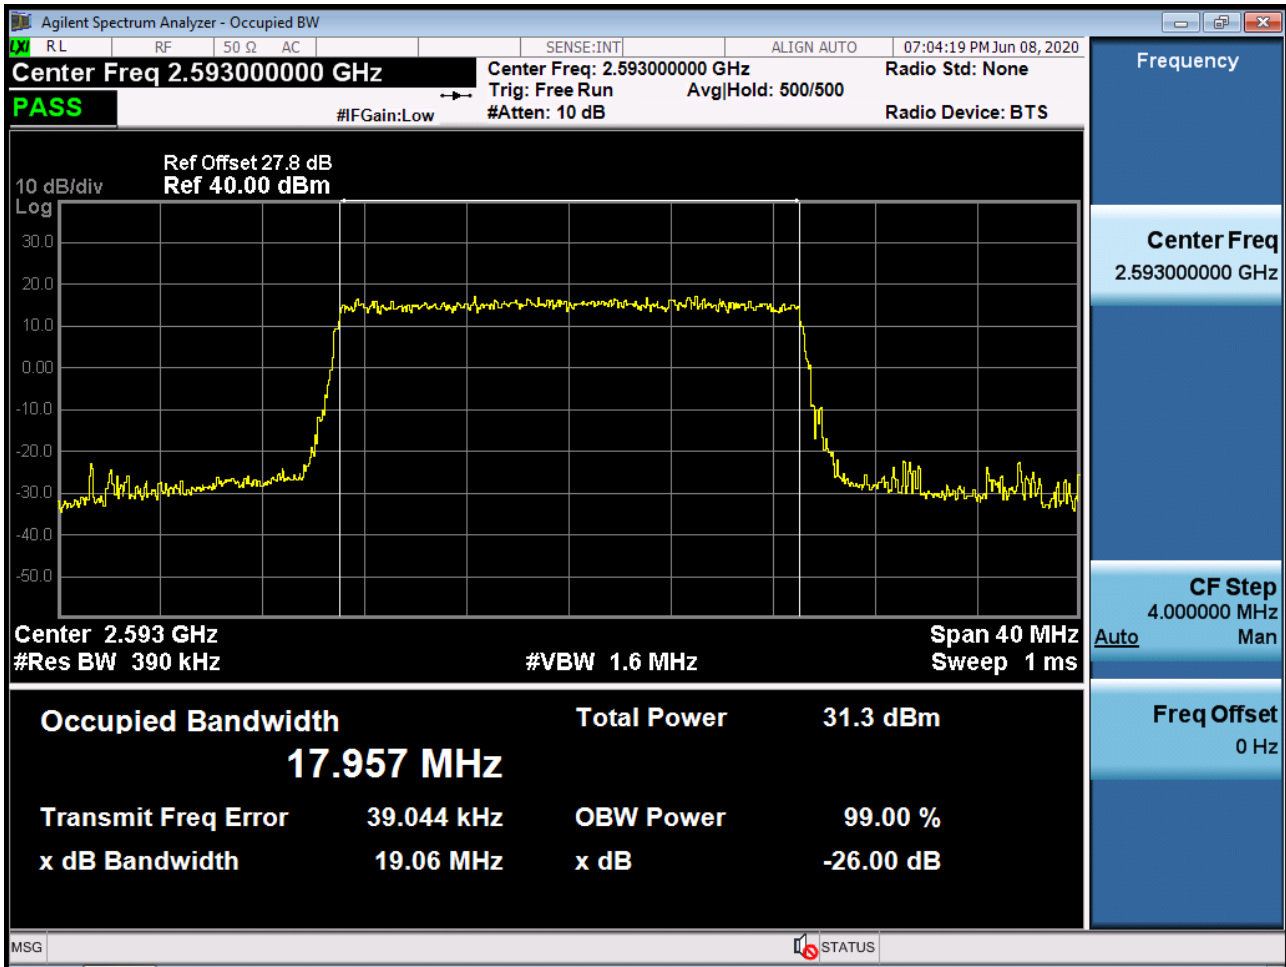


Occupied Bandwidth Plot (20 MHz Ch.40620 16-QAM RB 100) (POWER CLASS 3)

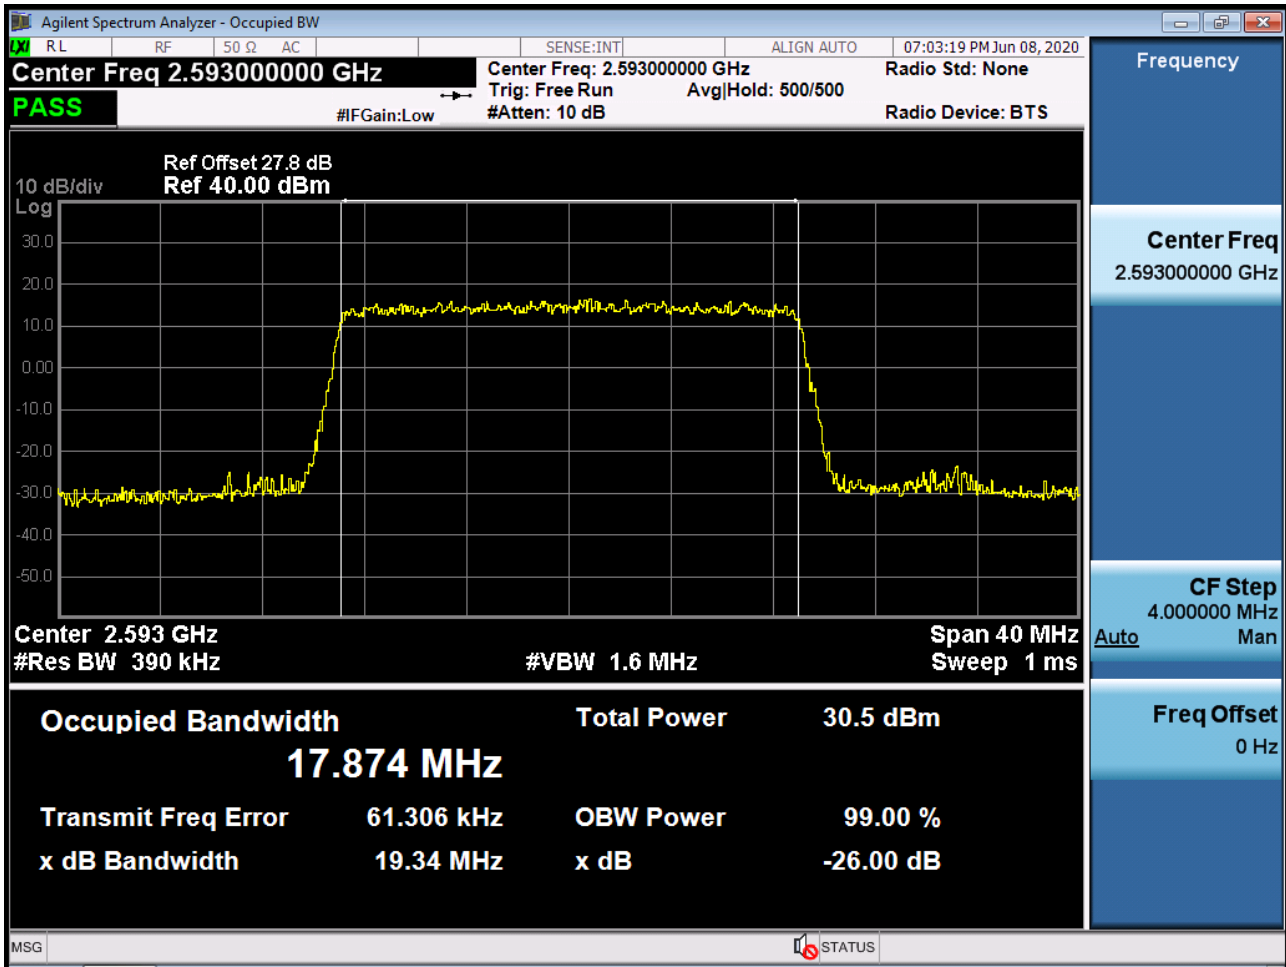


Occupied Bandwidth Plot (20 MHz Ch.40620 64-QAM RB 100) (POWER CLASS 3)

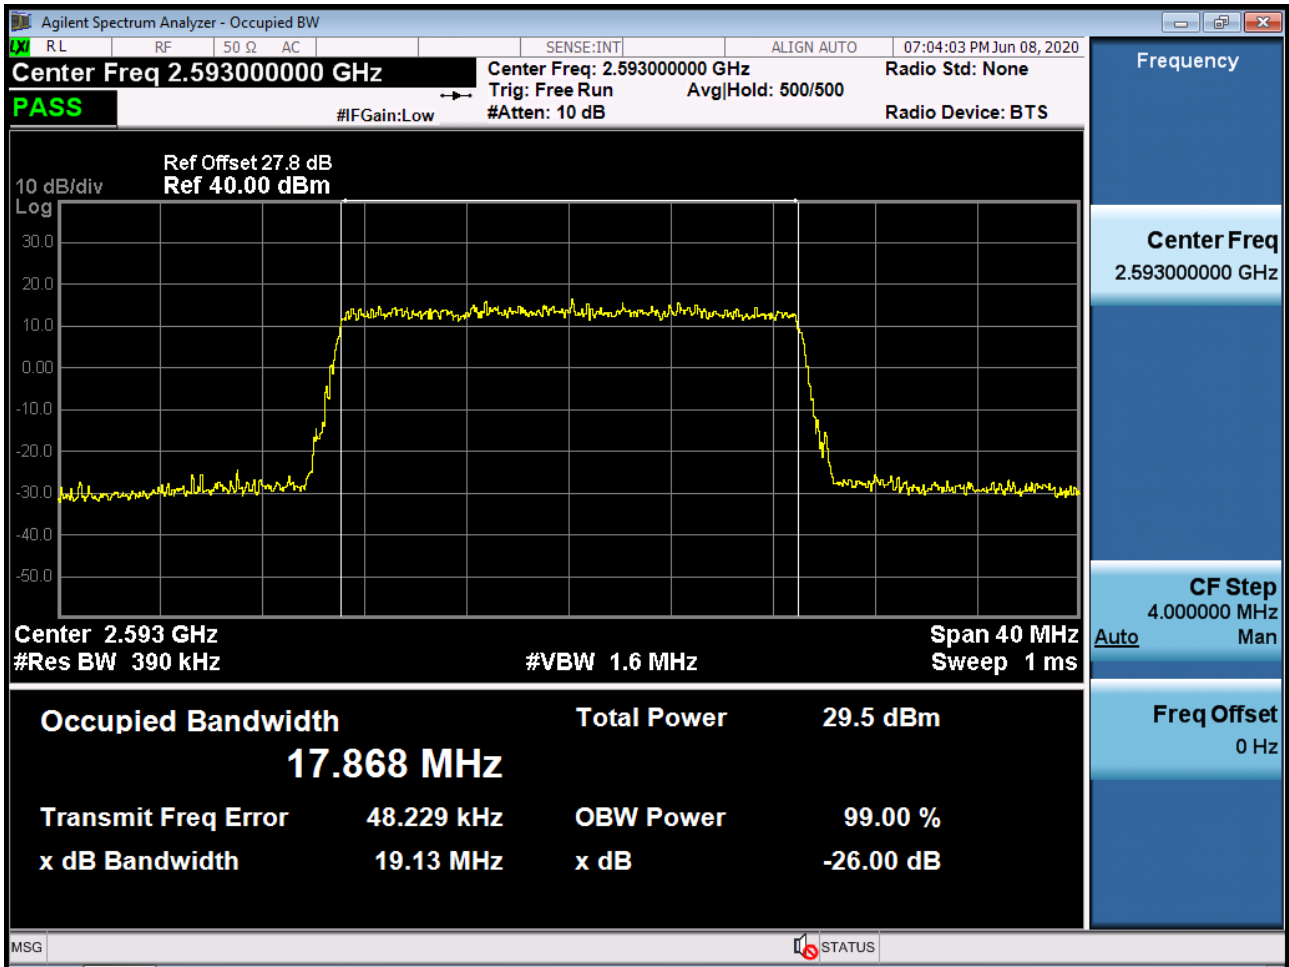


Occupied Bandwidth Plot (20 MHz Ch.40620 256-QAM RB 100) (POWER CLASS 3)

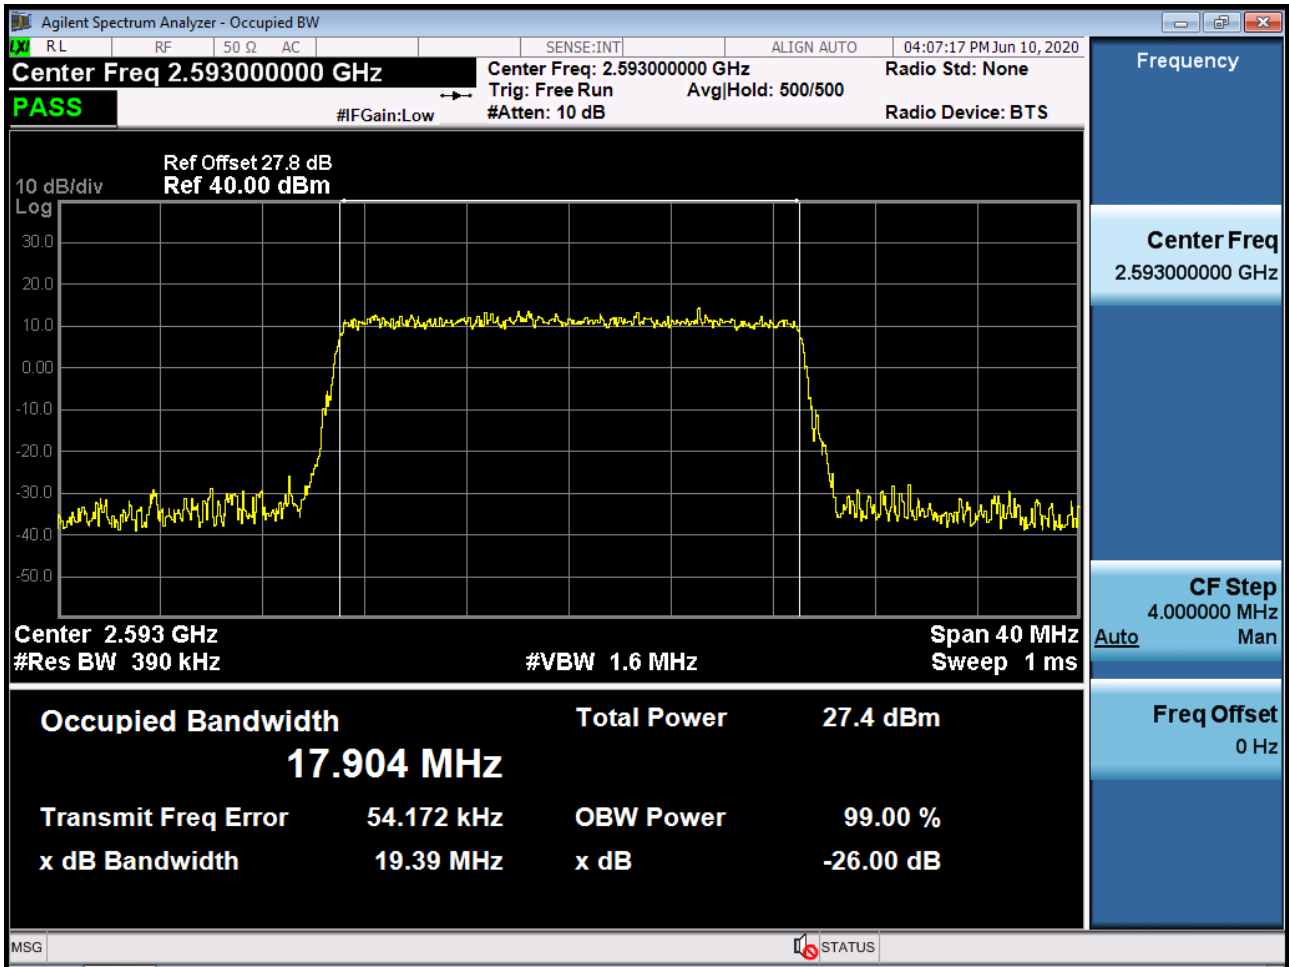

Occupied Bandwidth Plot (5 MHz Ch.40620 QPSK RB 25) (POWER CLASS 2)

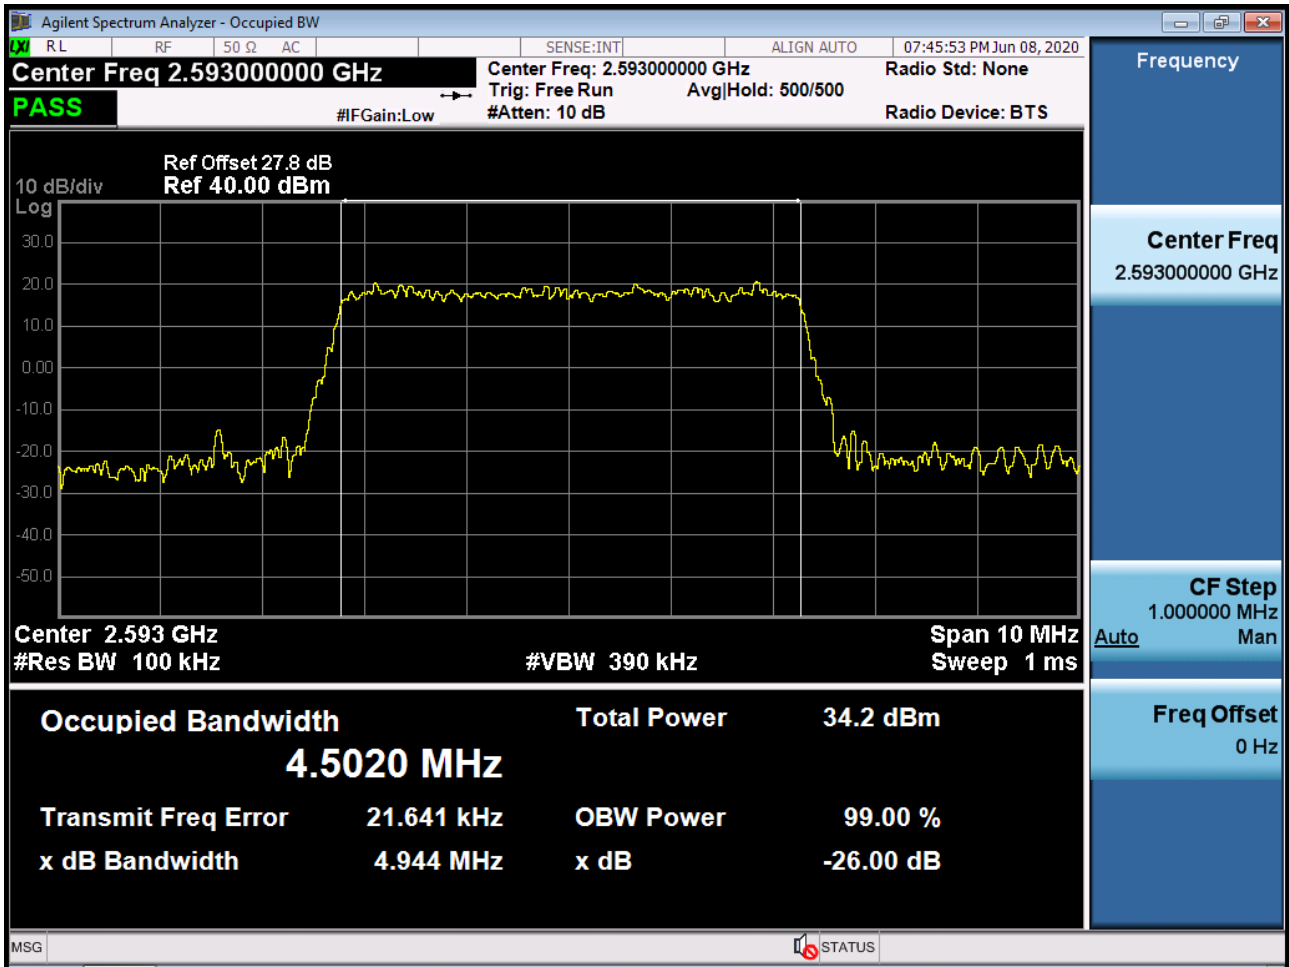


Occupied Bandwidth Plot (5 MHz Ch.40620 16-QAM RB 25) (POWER CLASS 2)

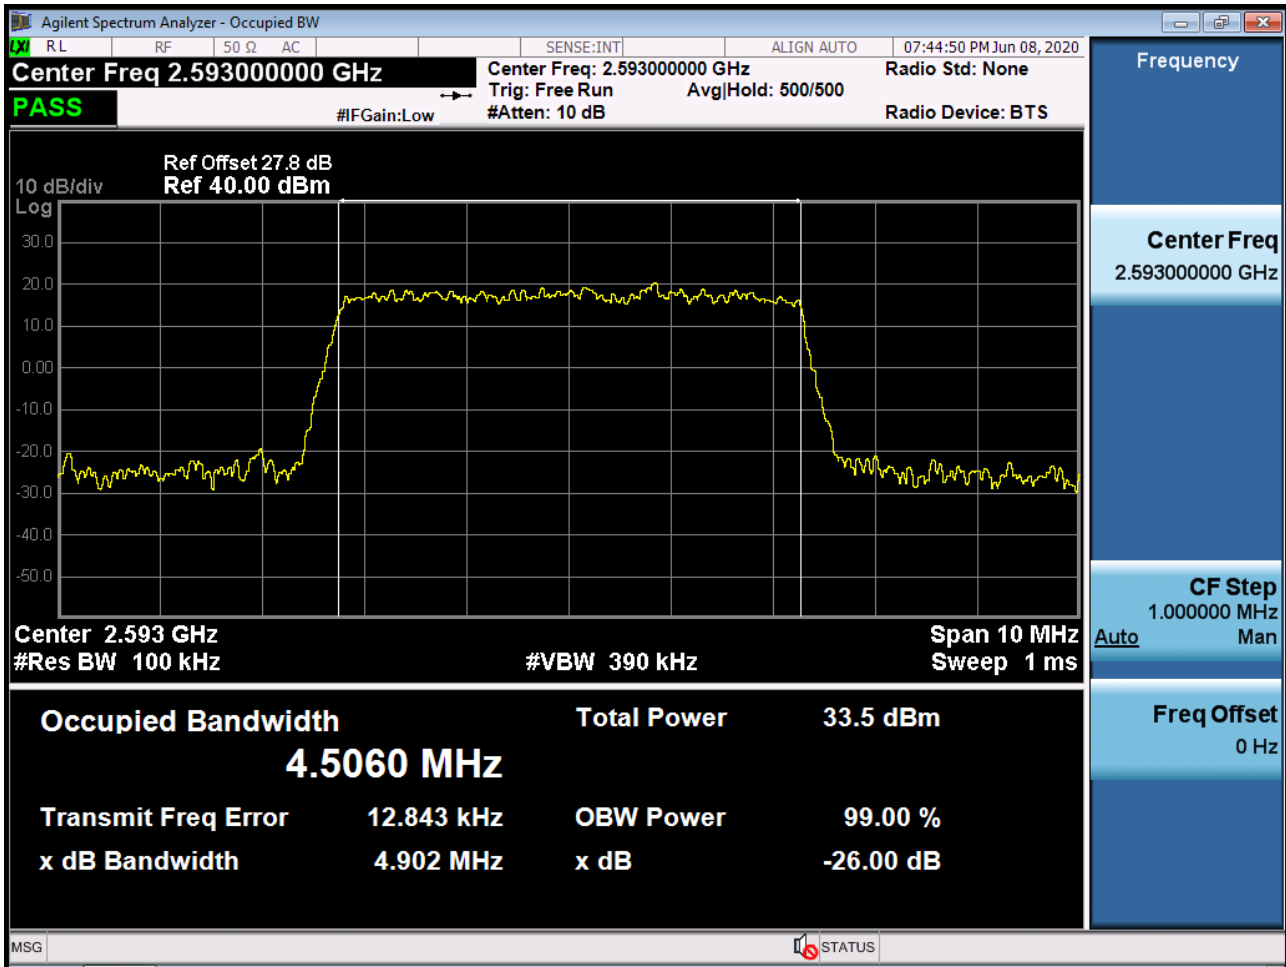





Occupied Bandwidth Plot (5 MHz Ch.40620 64-QAM RB 25) (POWER CLASS 2)

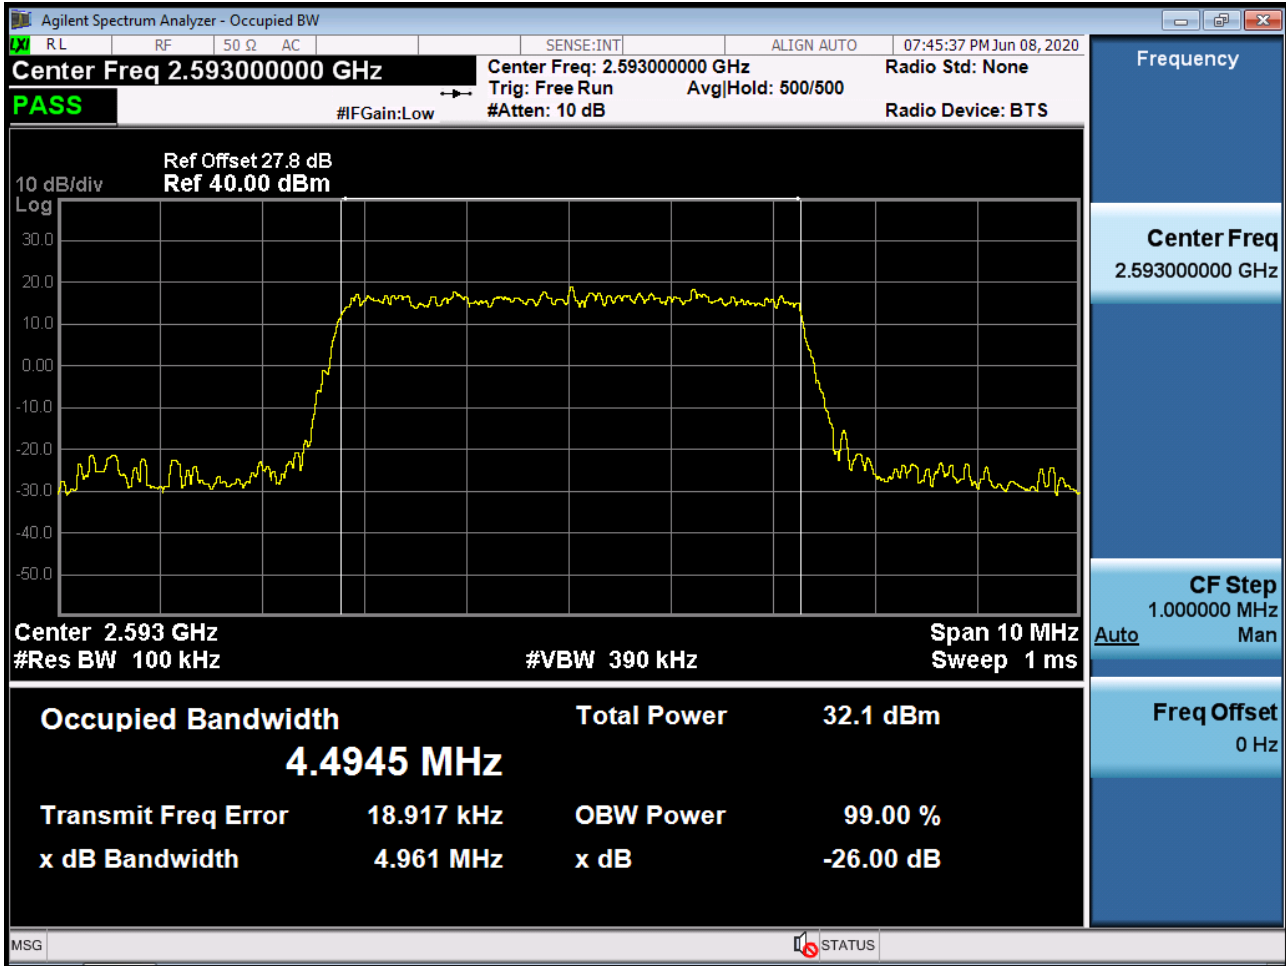


Occupied Bandwidth Plot (5 MHz Ch.40620 256-QAM RB 25) (POWER CLASS 2)

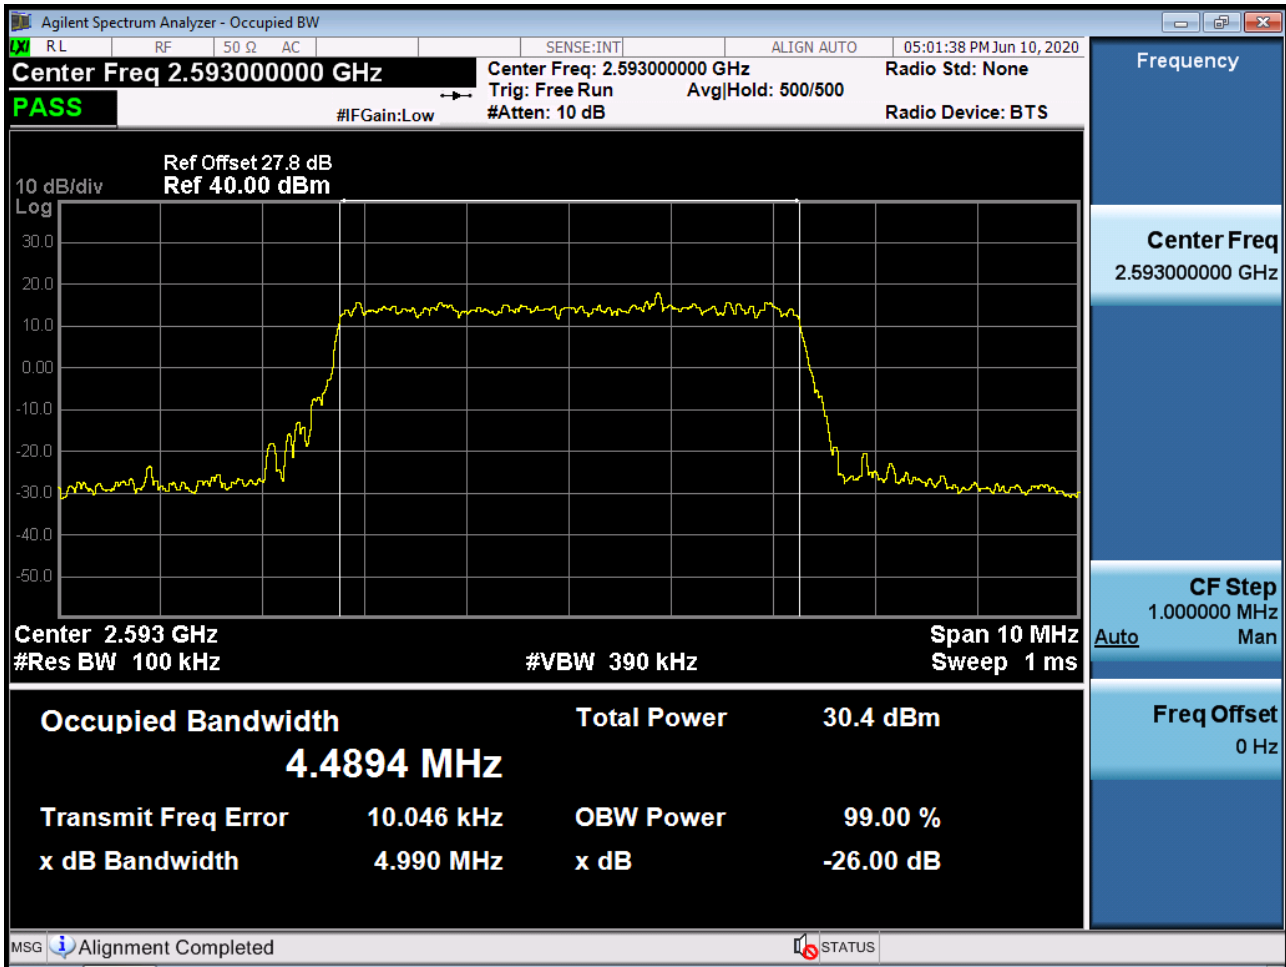


Occupied Bandwidth Plot (10 MHz Ch.40620 QPSK RB 50) (POWER CLASS 2)

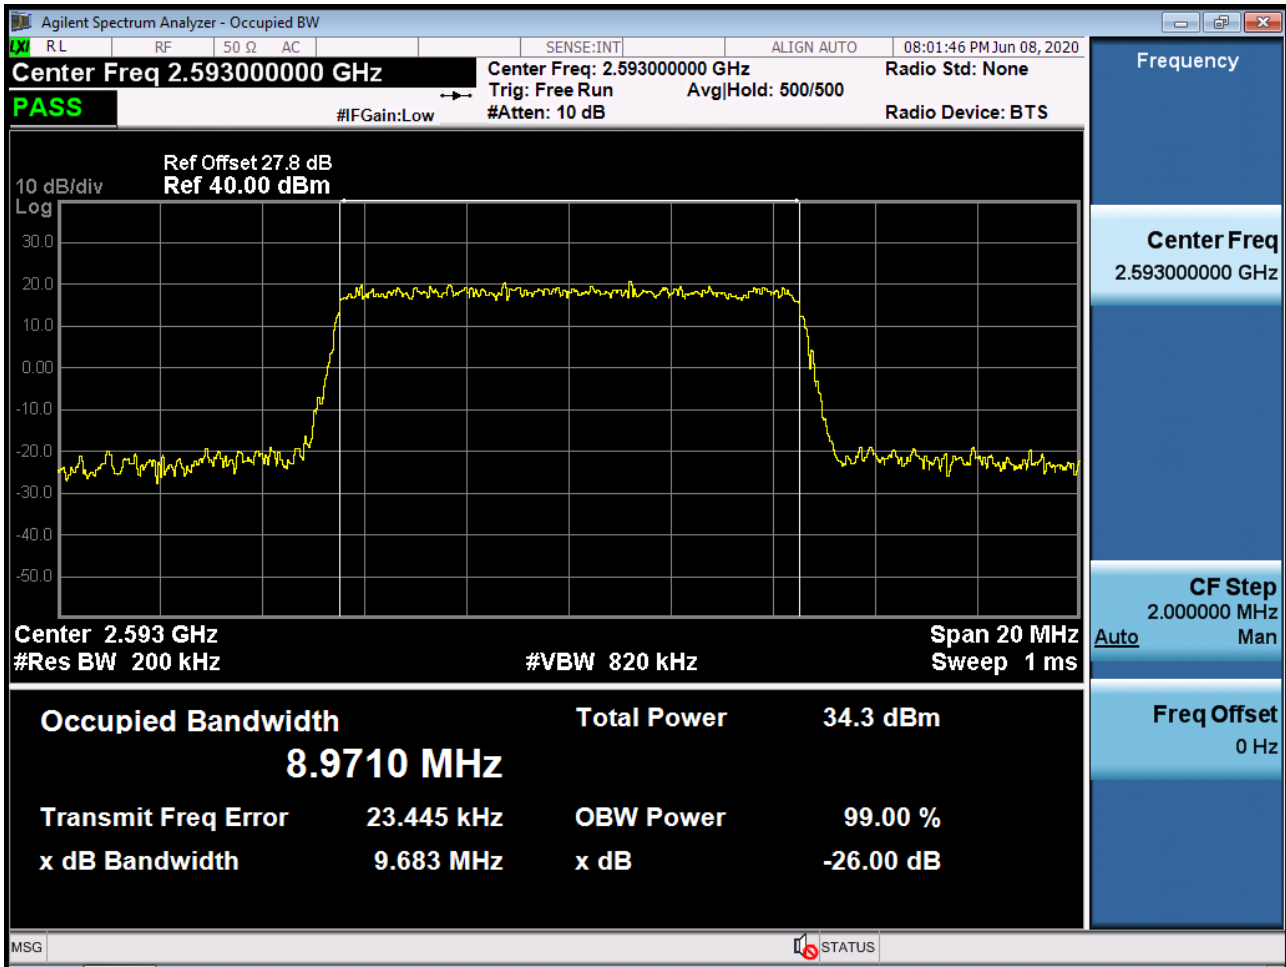


Occupied Bandwidth Plot (10 MHz Ch.40620 16-QAM RB 50) (POWER CLASS 2)

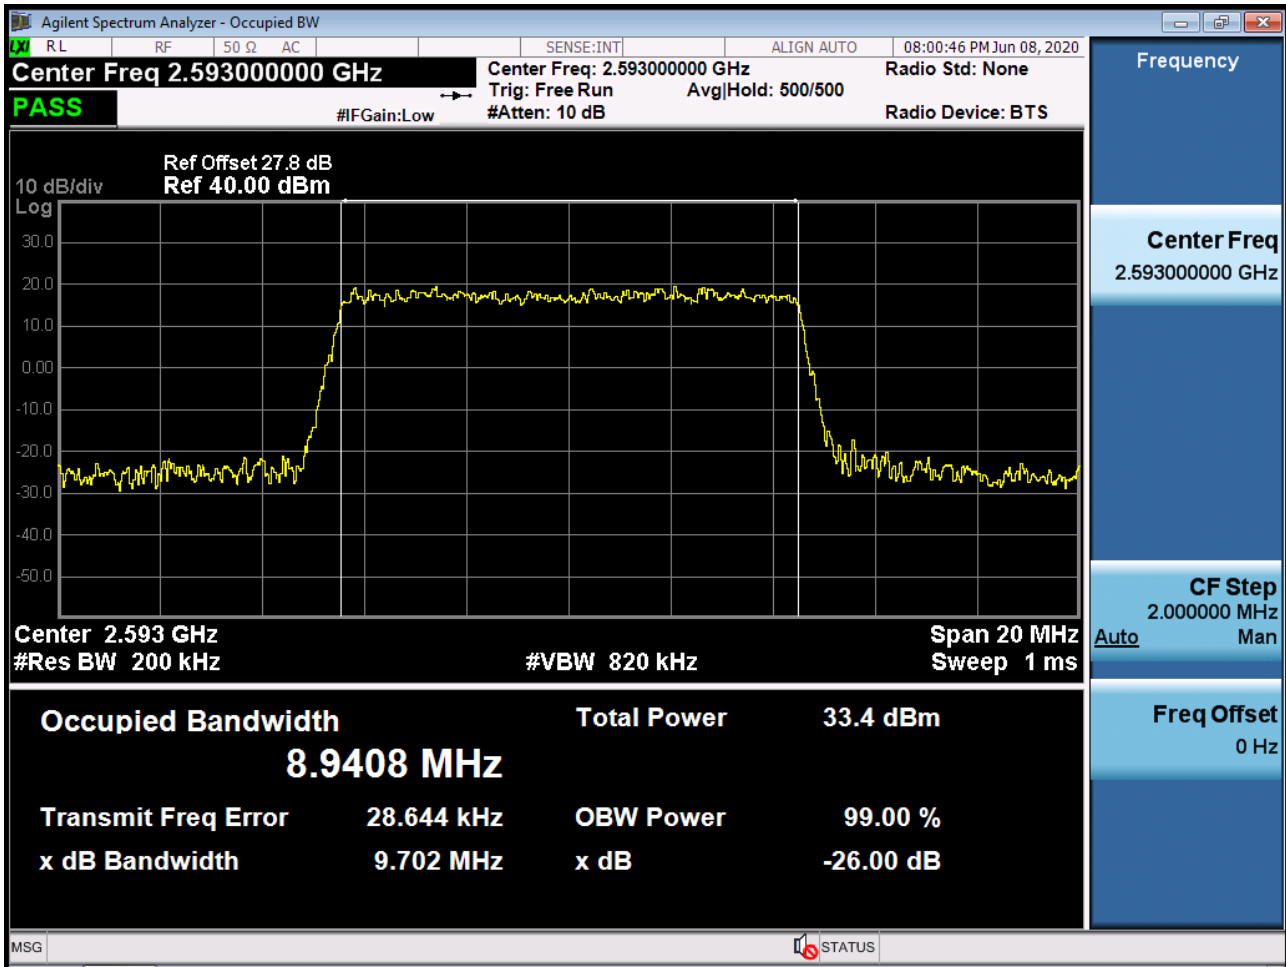


Occupied Bandwidth Plot (10 MHz Ch.40620 64-QAM RB 50) (POWER CLASS 2)

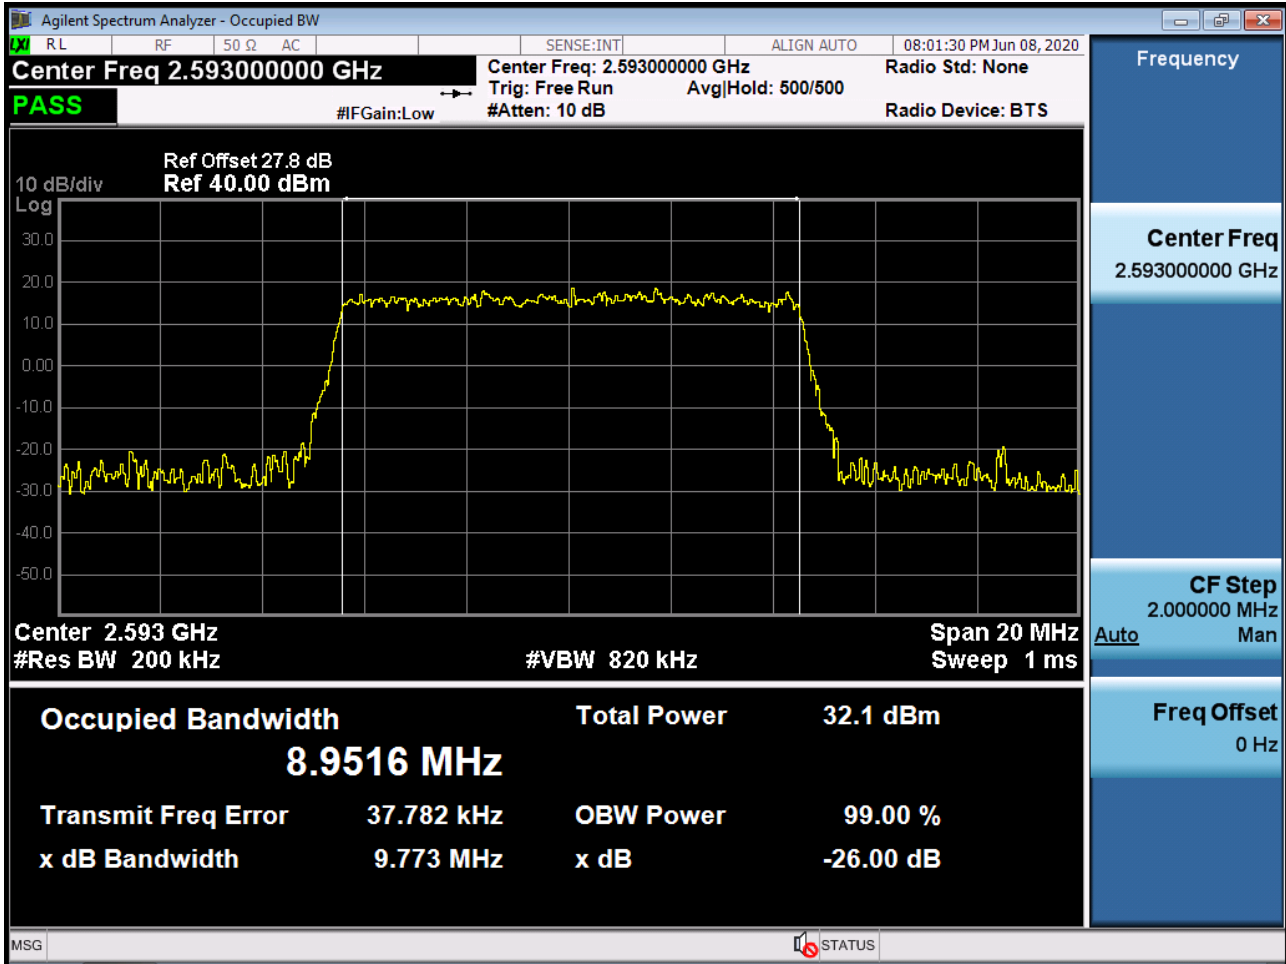


Occupied Bandwidth Plot (10 MHz Ch.40620 256-QAM RB 50) (POWER CLASS 2)

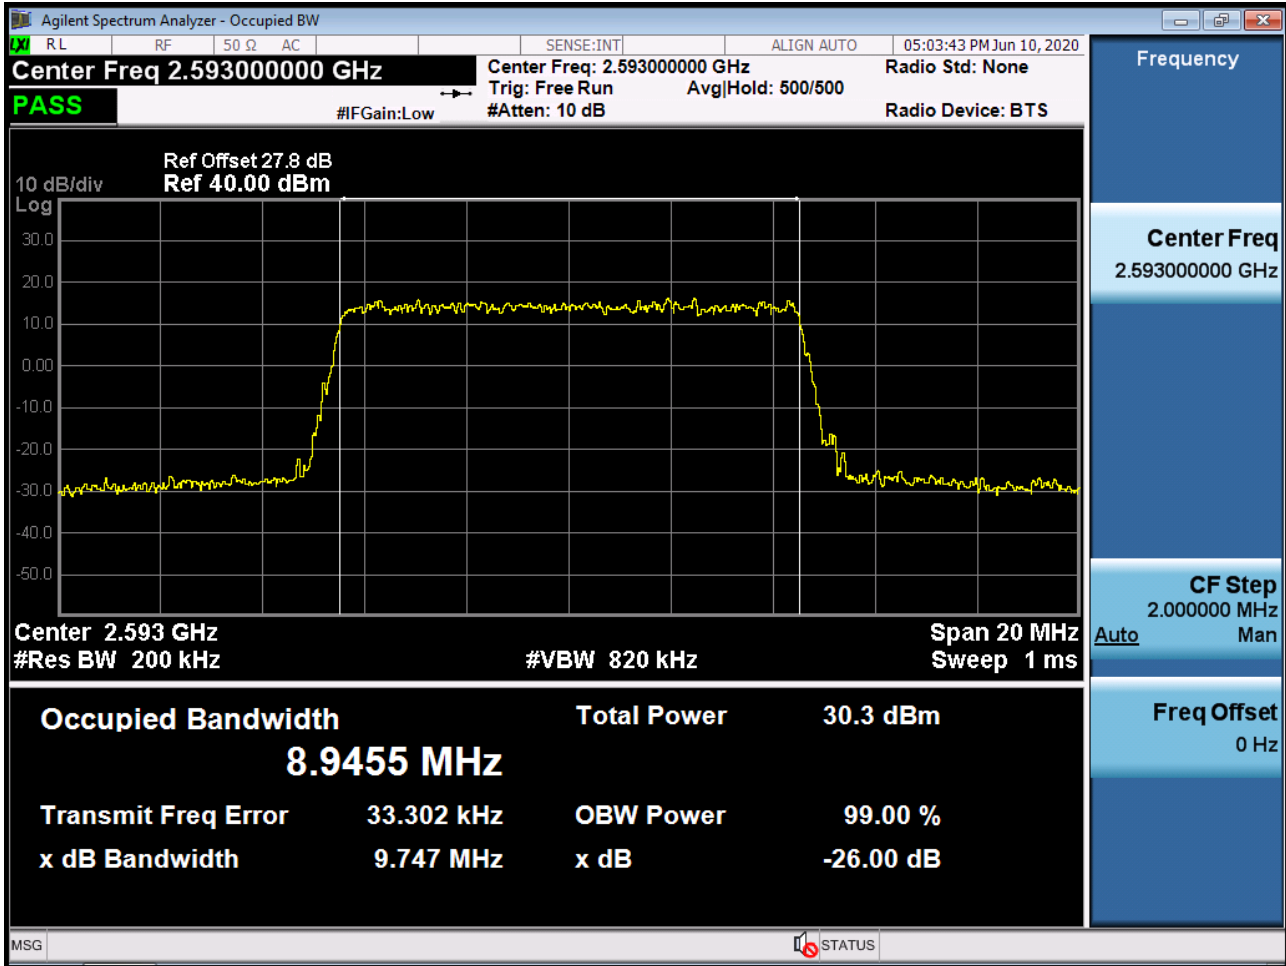

Occupied Bandwidth Plot (15 MHz Ch.40620 QPSK RB 75) (POWER CLASS 2)

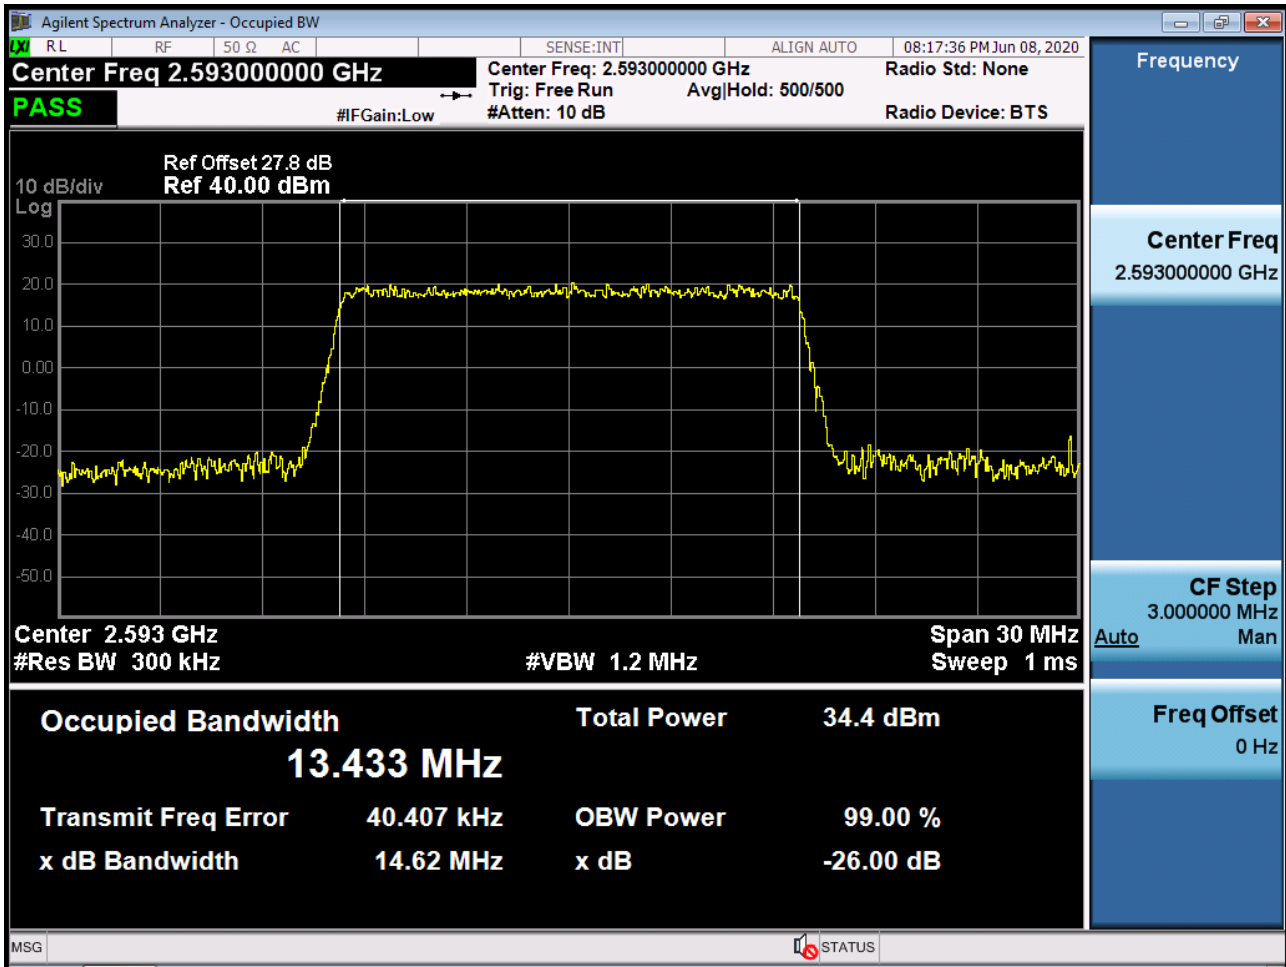


Occupied Bandwidth Plot (15 MHz Ch.40620 16-QAM RB 75) (POWER CLASS 2)

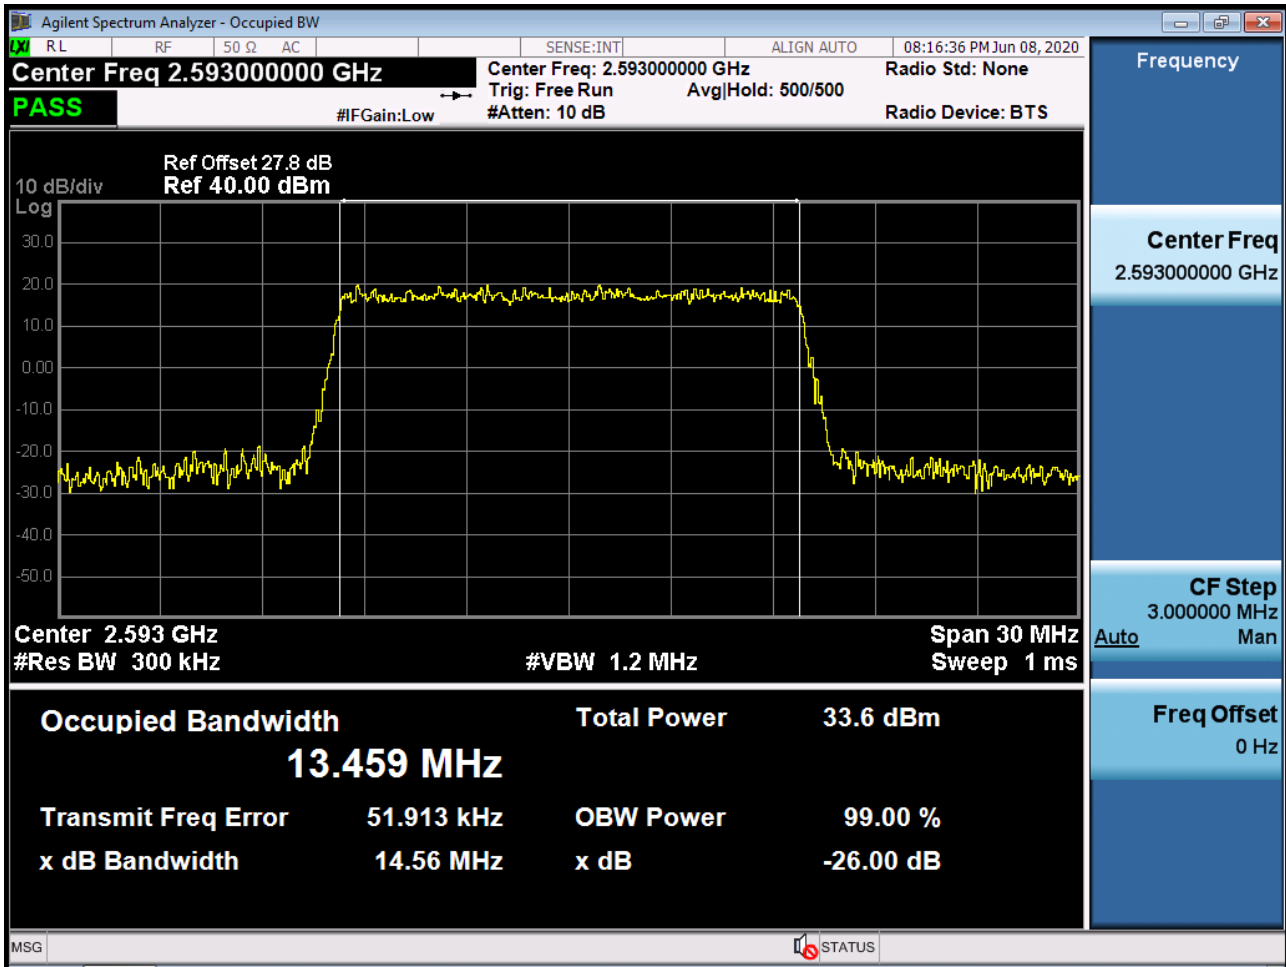





Occupied Bandwidth Plot (15 MHz Ch.40620 64-QAM RB 75) (POWER CLASS 2)

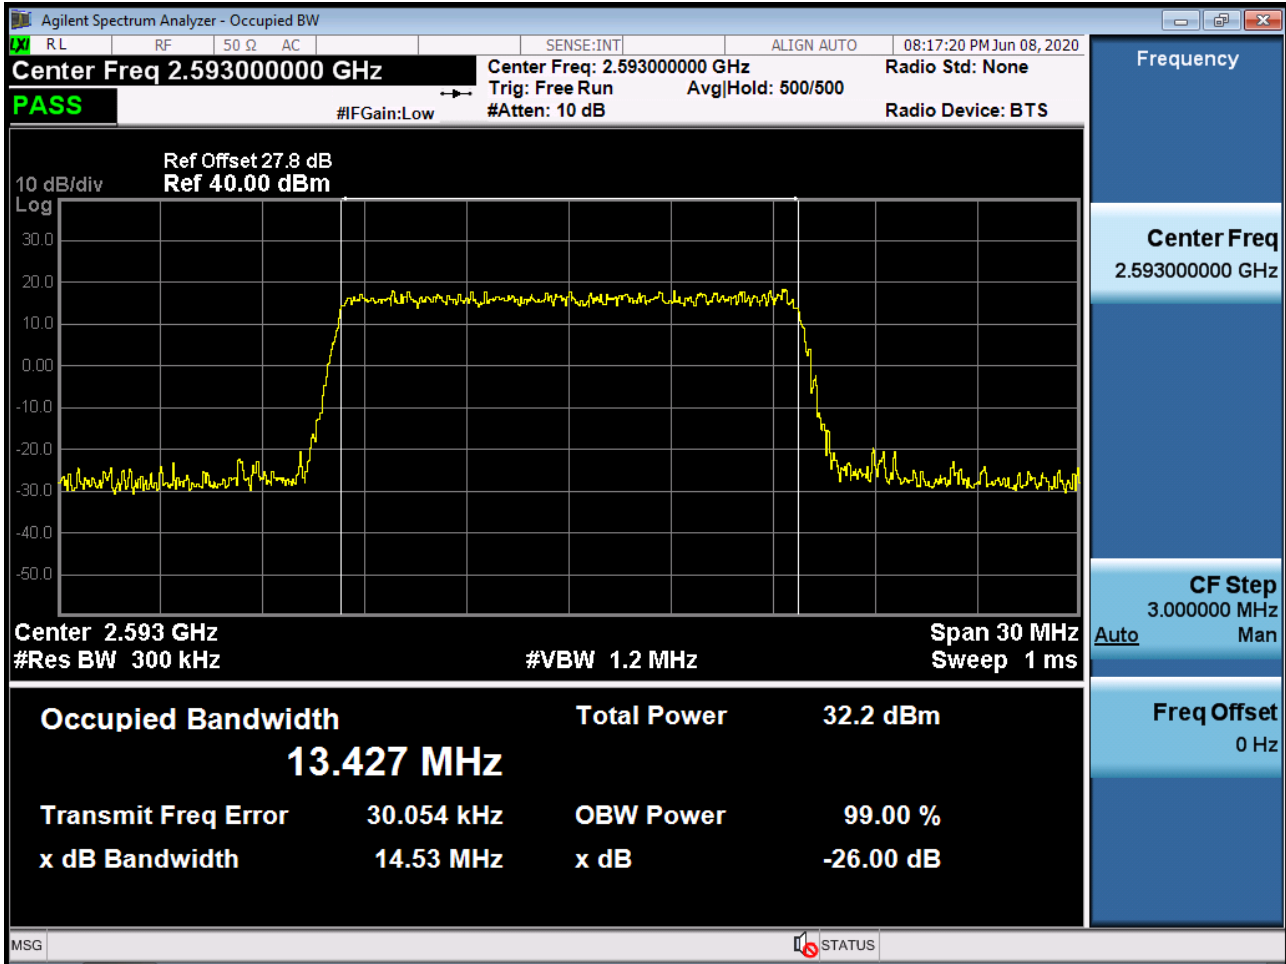


Occupied Bandwidth Plot (15 MHz Ch.40620 256-QAM RB 75) (POWER CLASS 2)

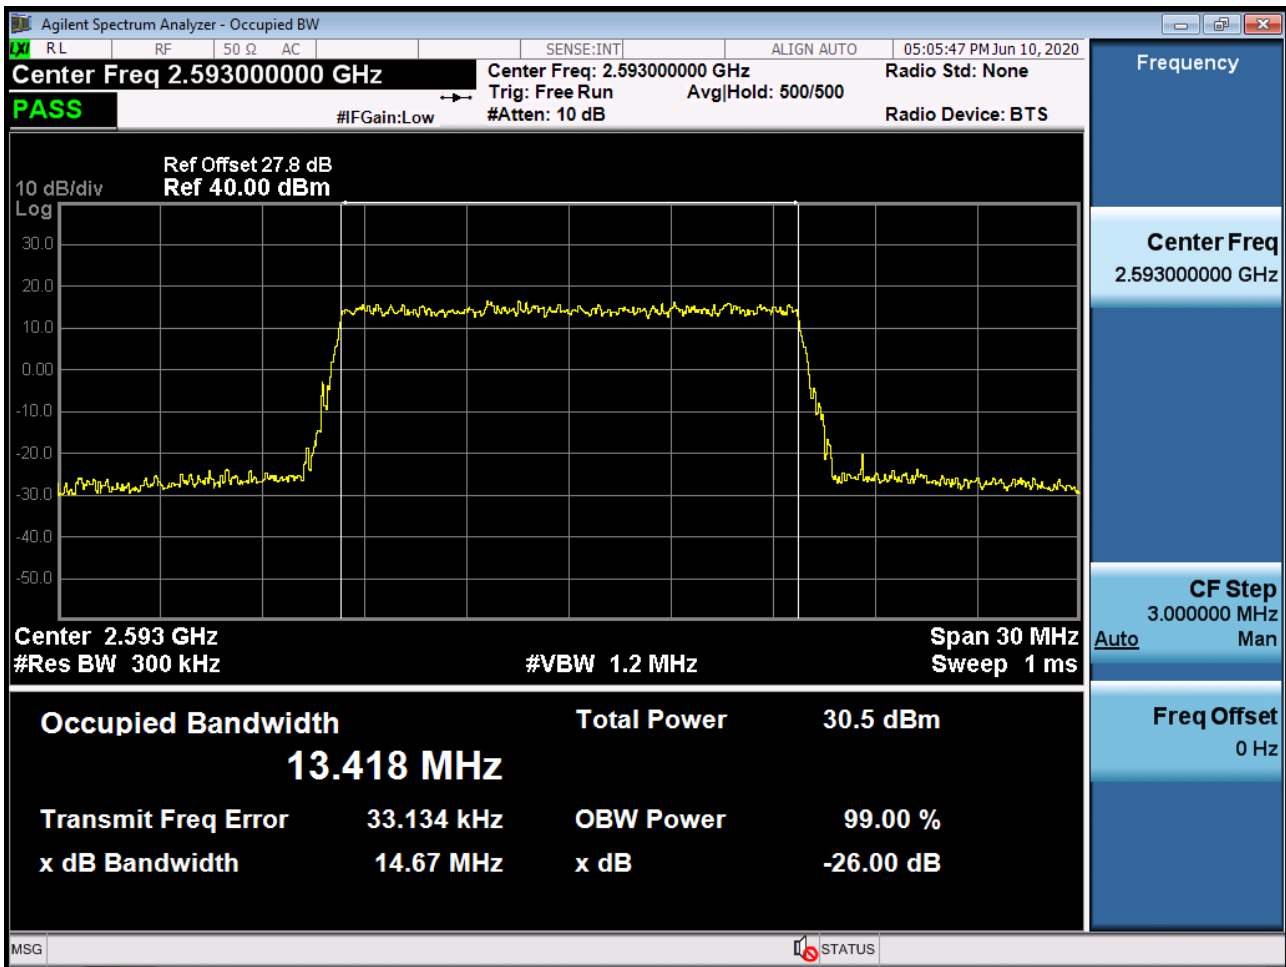


Occupied Bandwidth Plot (20 MHz Ch.40620 QPSK RB 100) (POWER CLASS 2)

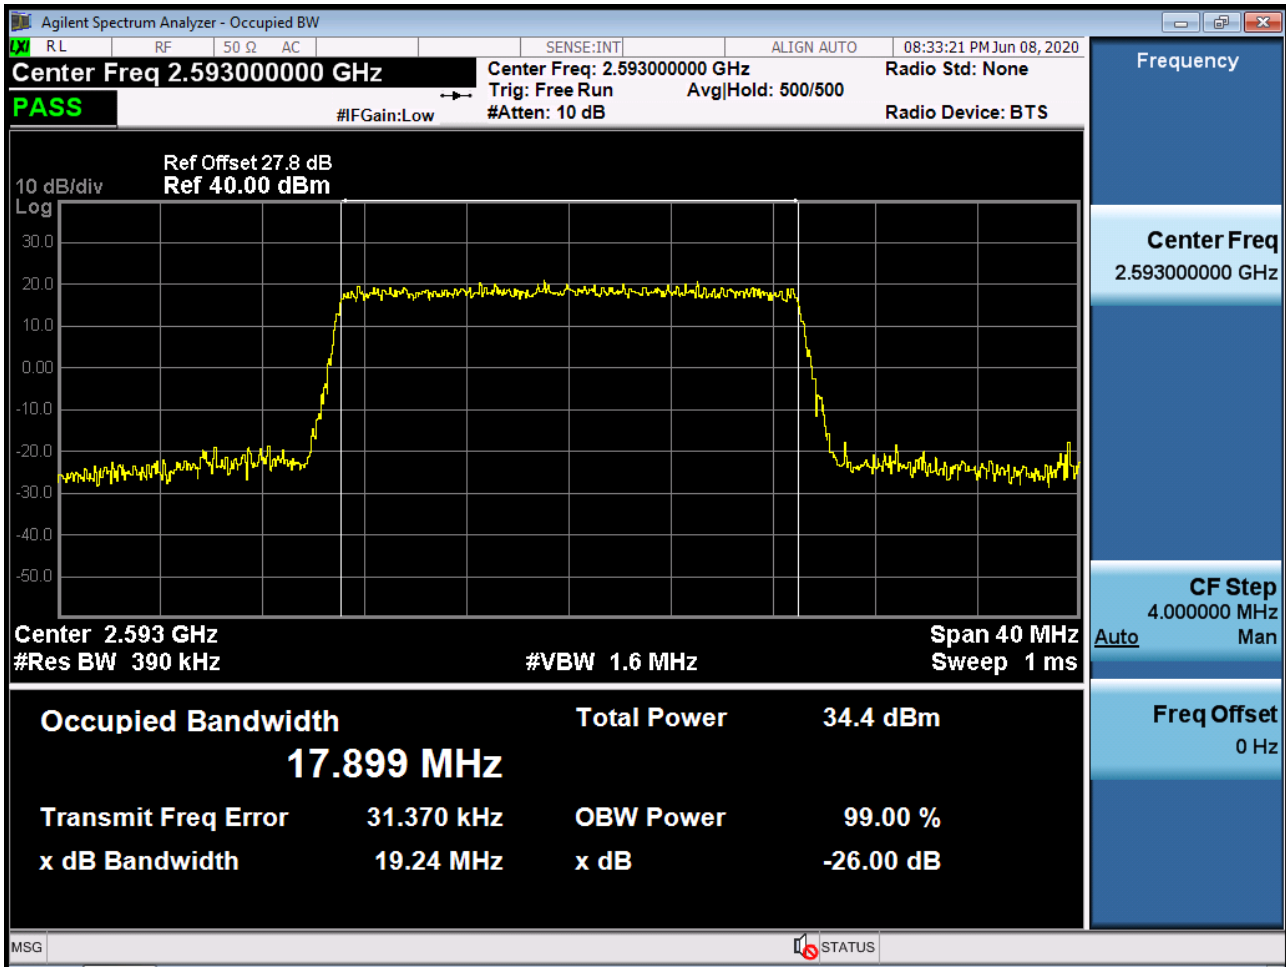


Occupied Bandwidth Plot (20 MHz Ch.40620 16-QAM RB 100) (POWER CLASS 2)

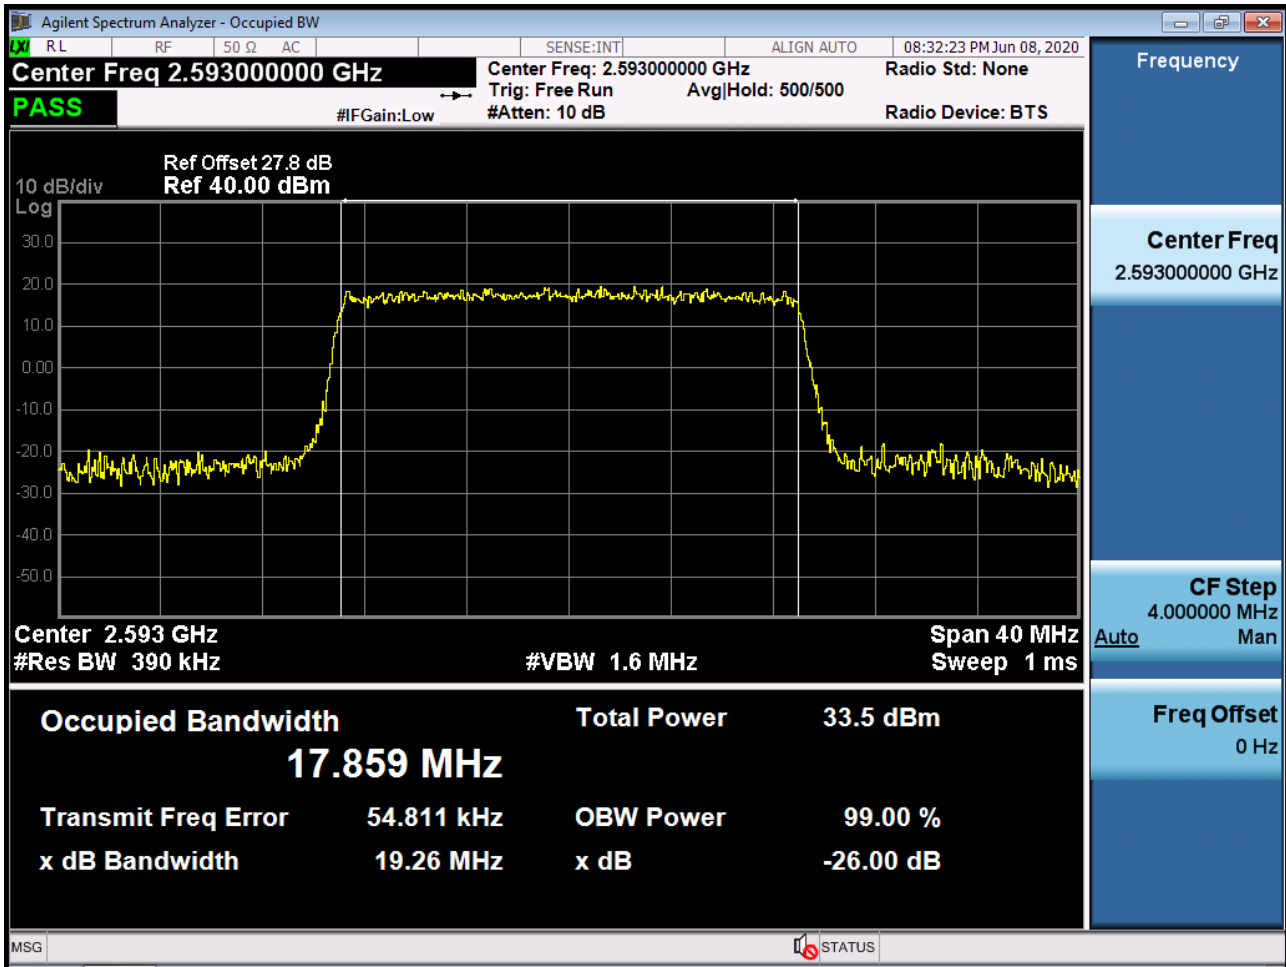


Occupied Bandwidth Plot (20 MHz Ch.40620 64-QAM RB 100) (POWER CLASS 2)

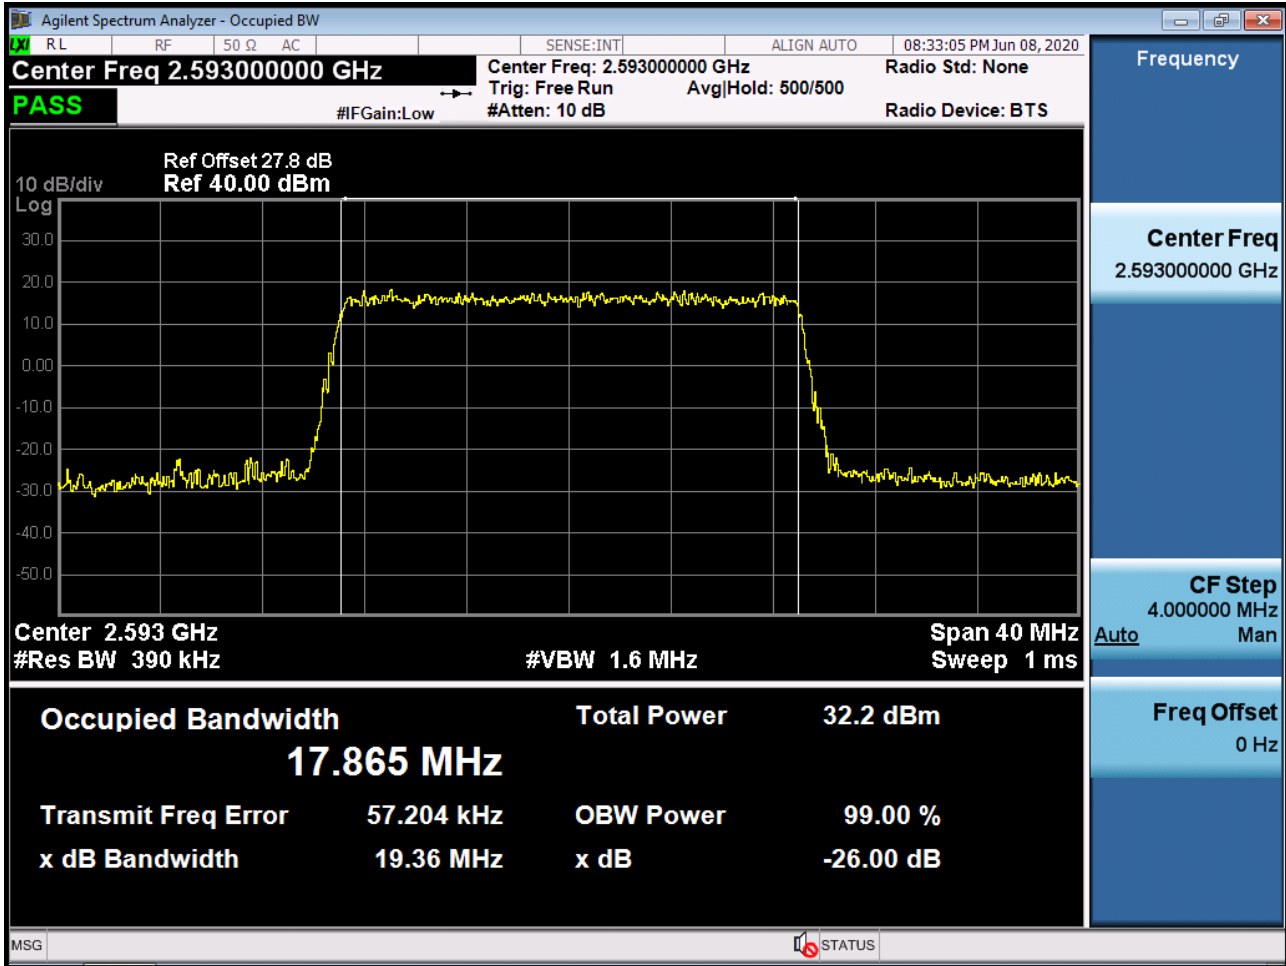


Occupied Bandwidth Plot (20 MHz Ch.40620 256-QAM RB 100) (POWER CLASS 2)

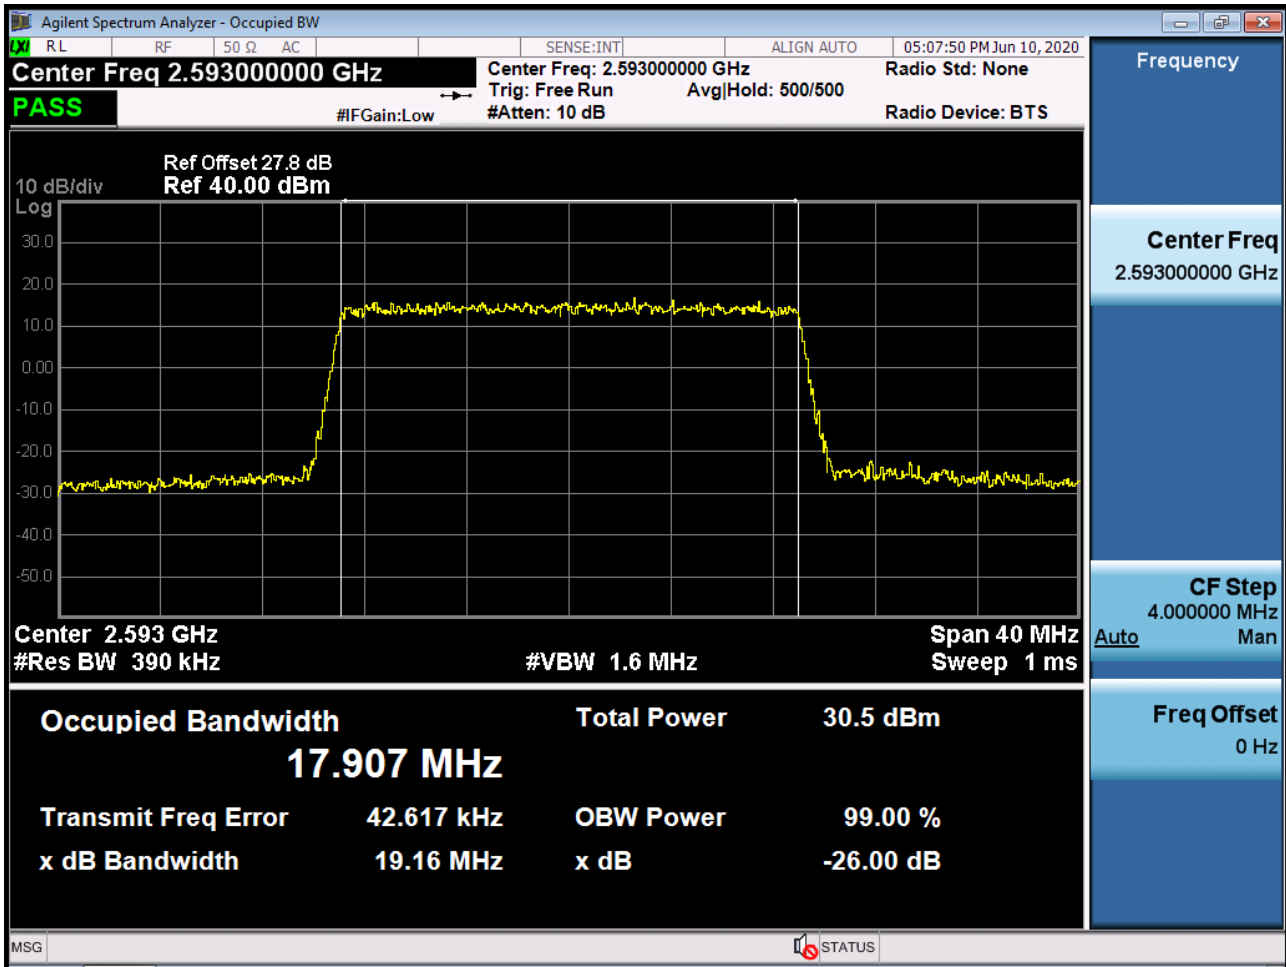

PAR Plot (5M BW\_Ch.40620\_QPSK\_RB25\_0) (POWER CLASS 3)

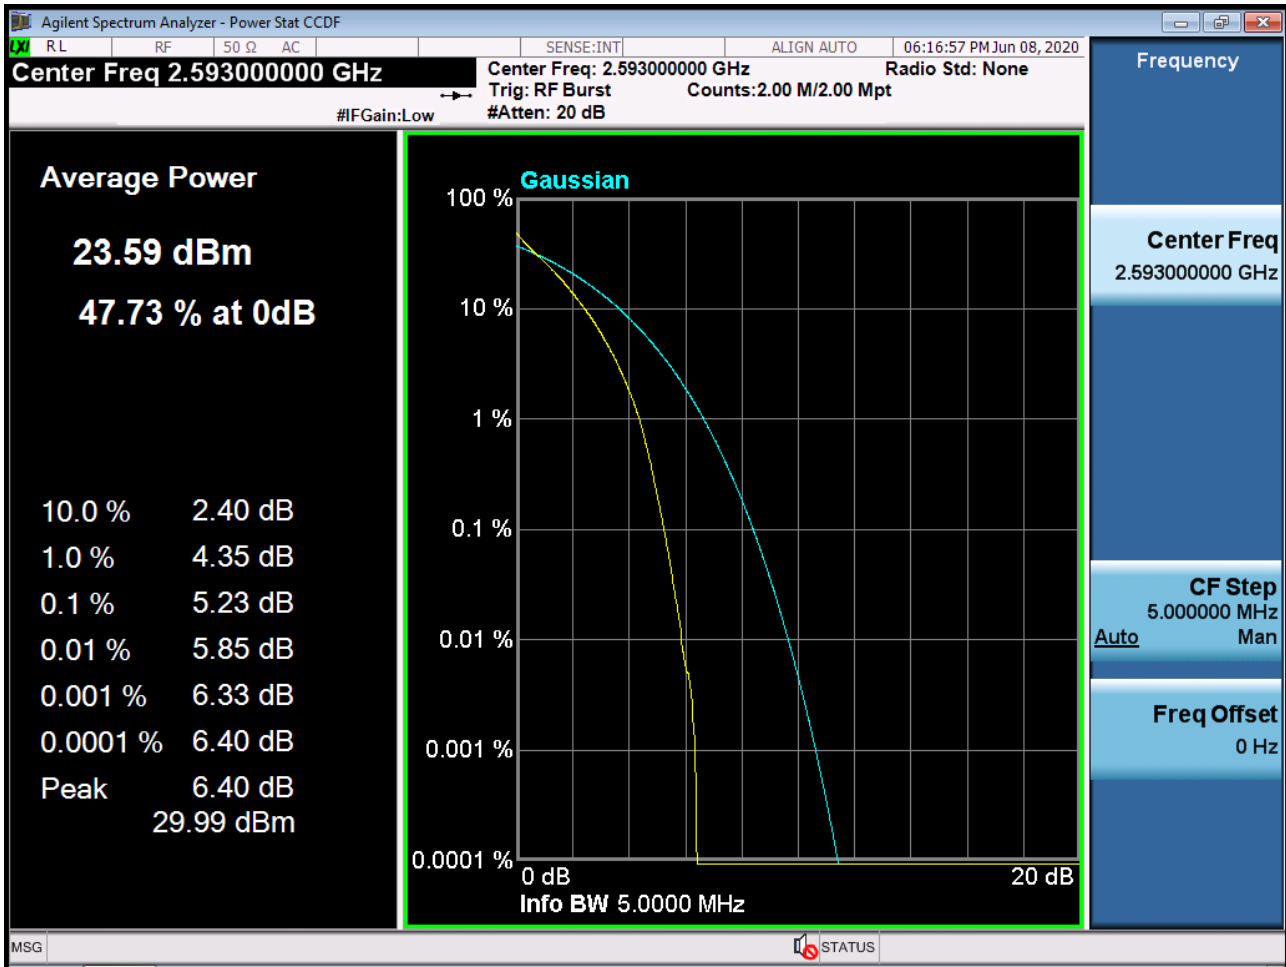


PAR Plot (5M BW\_Ch.40620\_16QAM\_RB25\_0) (POWER CLASS 3)

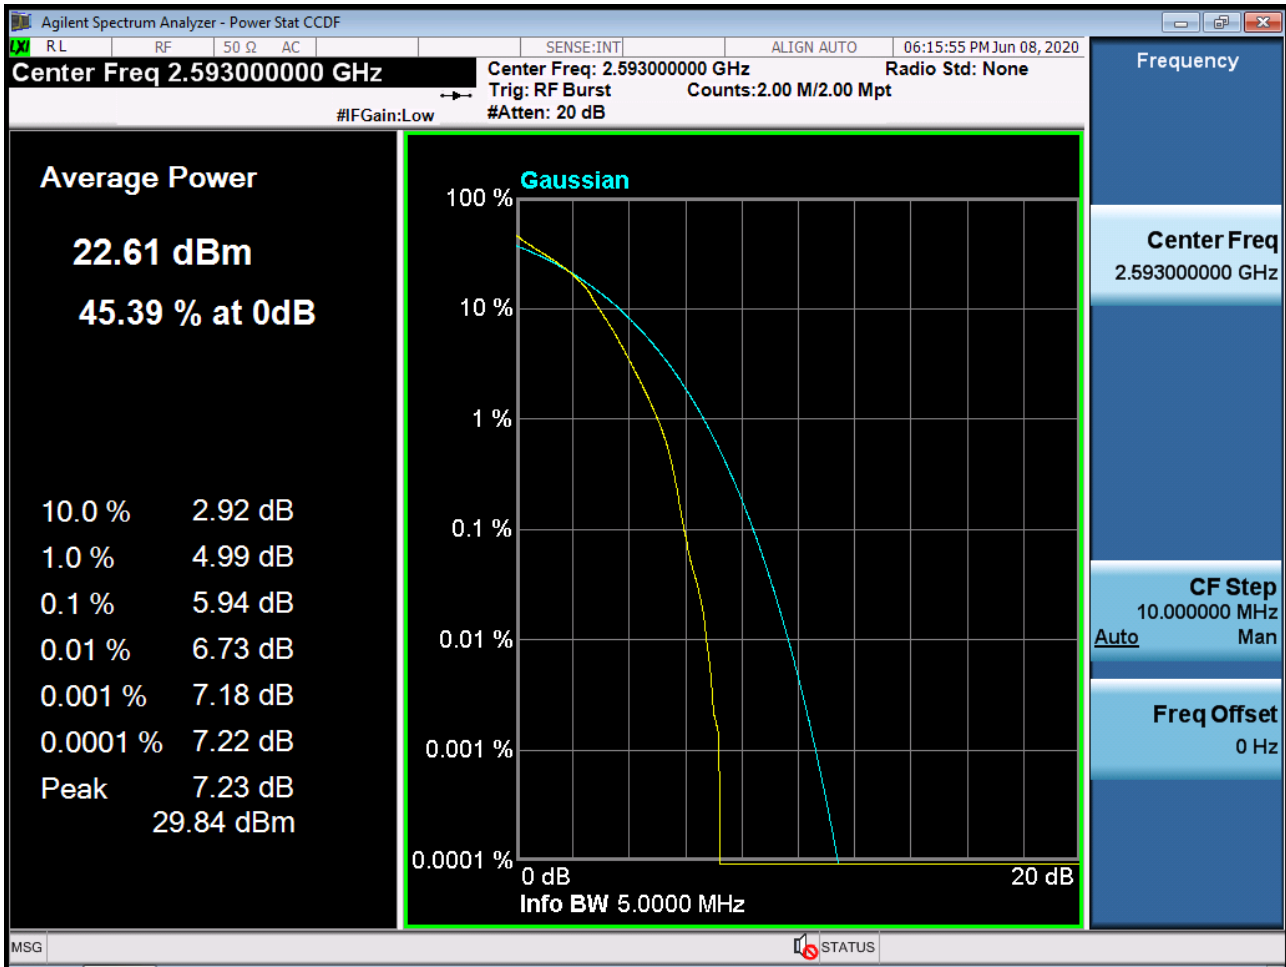





PAR Plot (5M BW\_Ch.40620\_64QAM\_RB25\_0) (POWER CLASS 3)

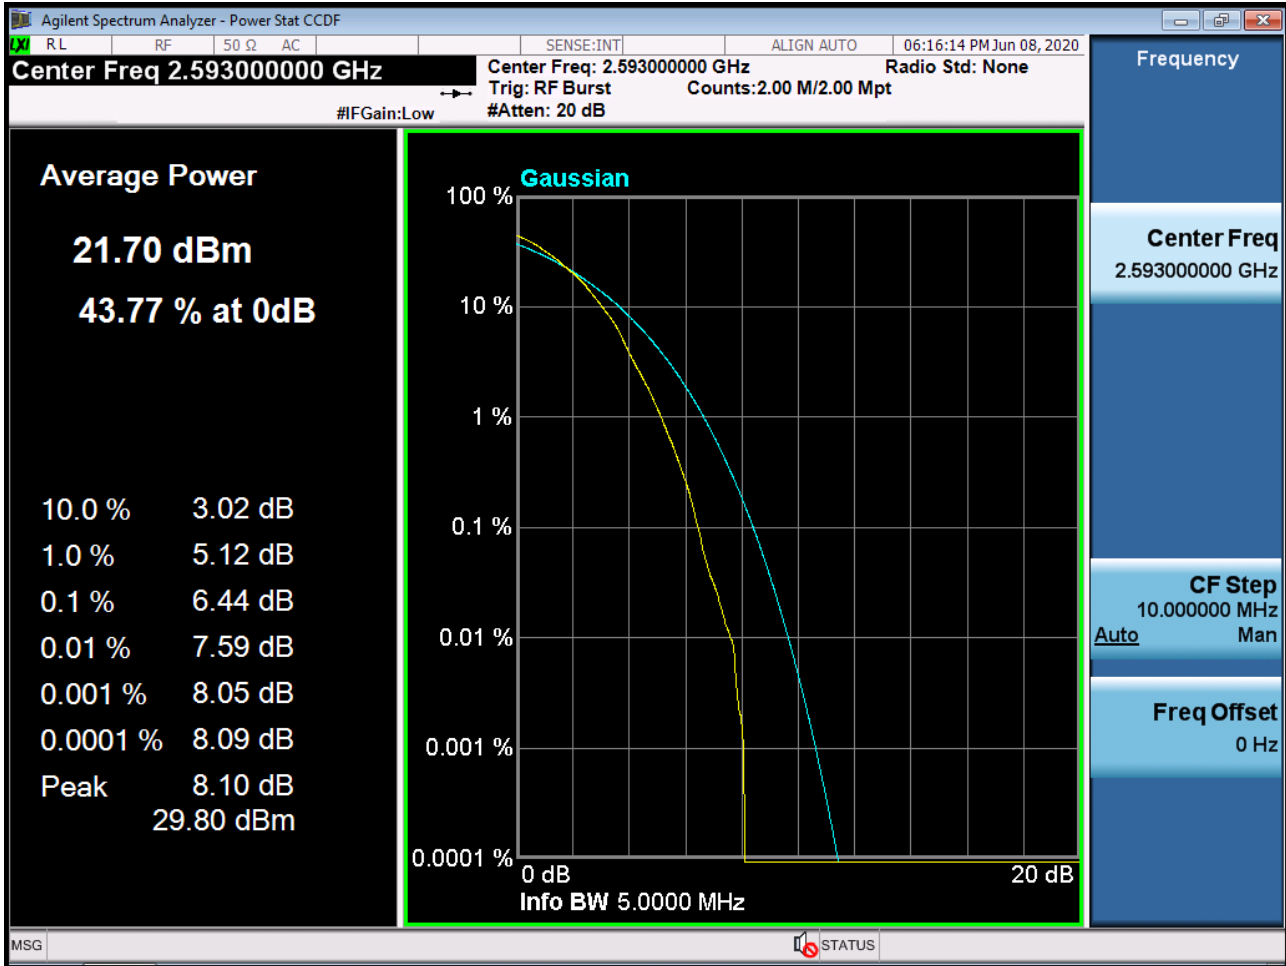


PAR Plot (5M BW\_Ch.40620\_256QAM\_RB25\_0) (POWER CLASS 3)

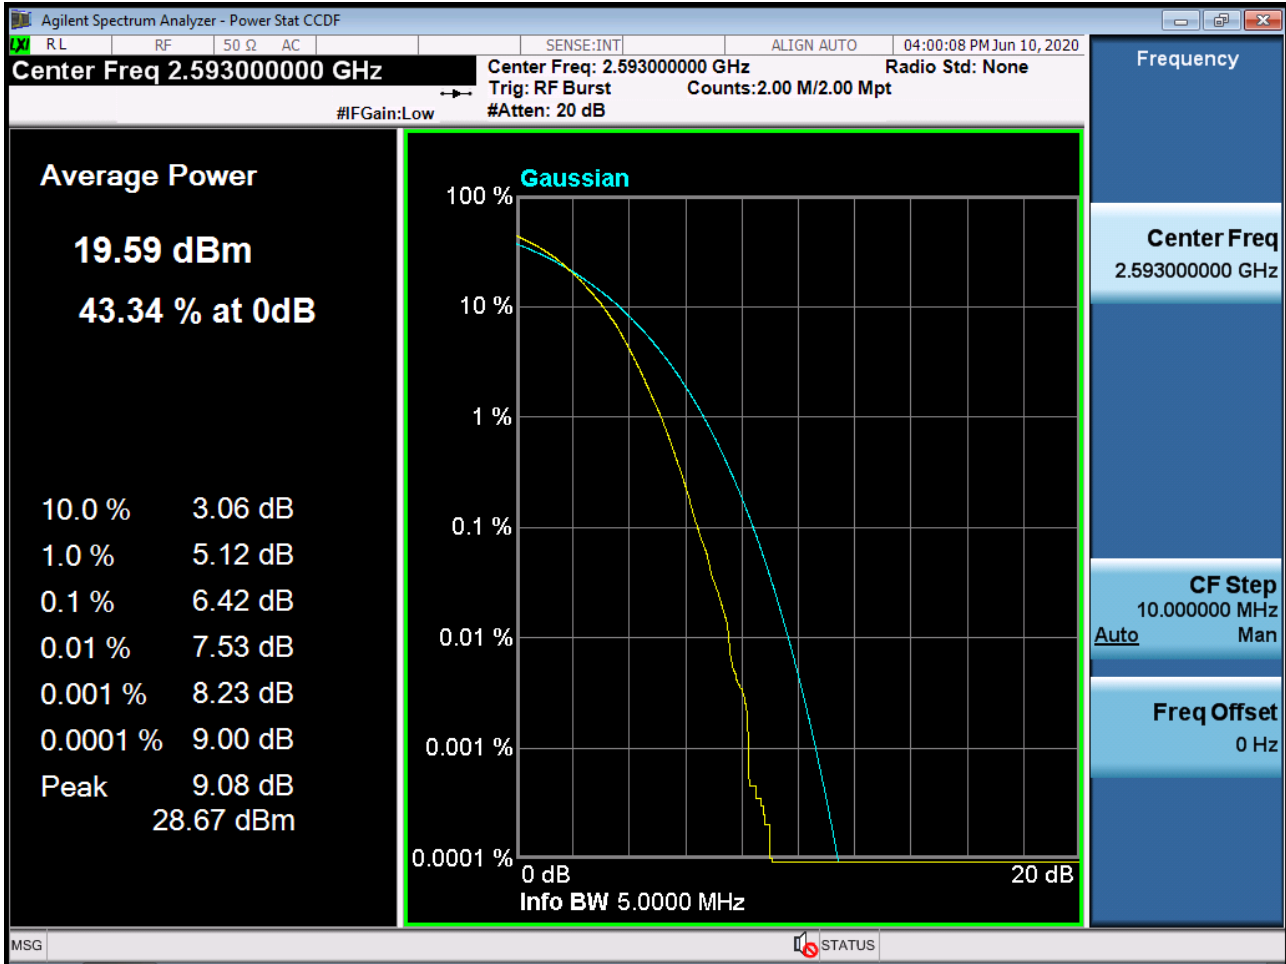


PAR Plot (10M BW\_Ch.40620\_QPSK\_RB50\_0) (POWER CLASS 3)

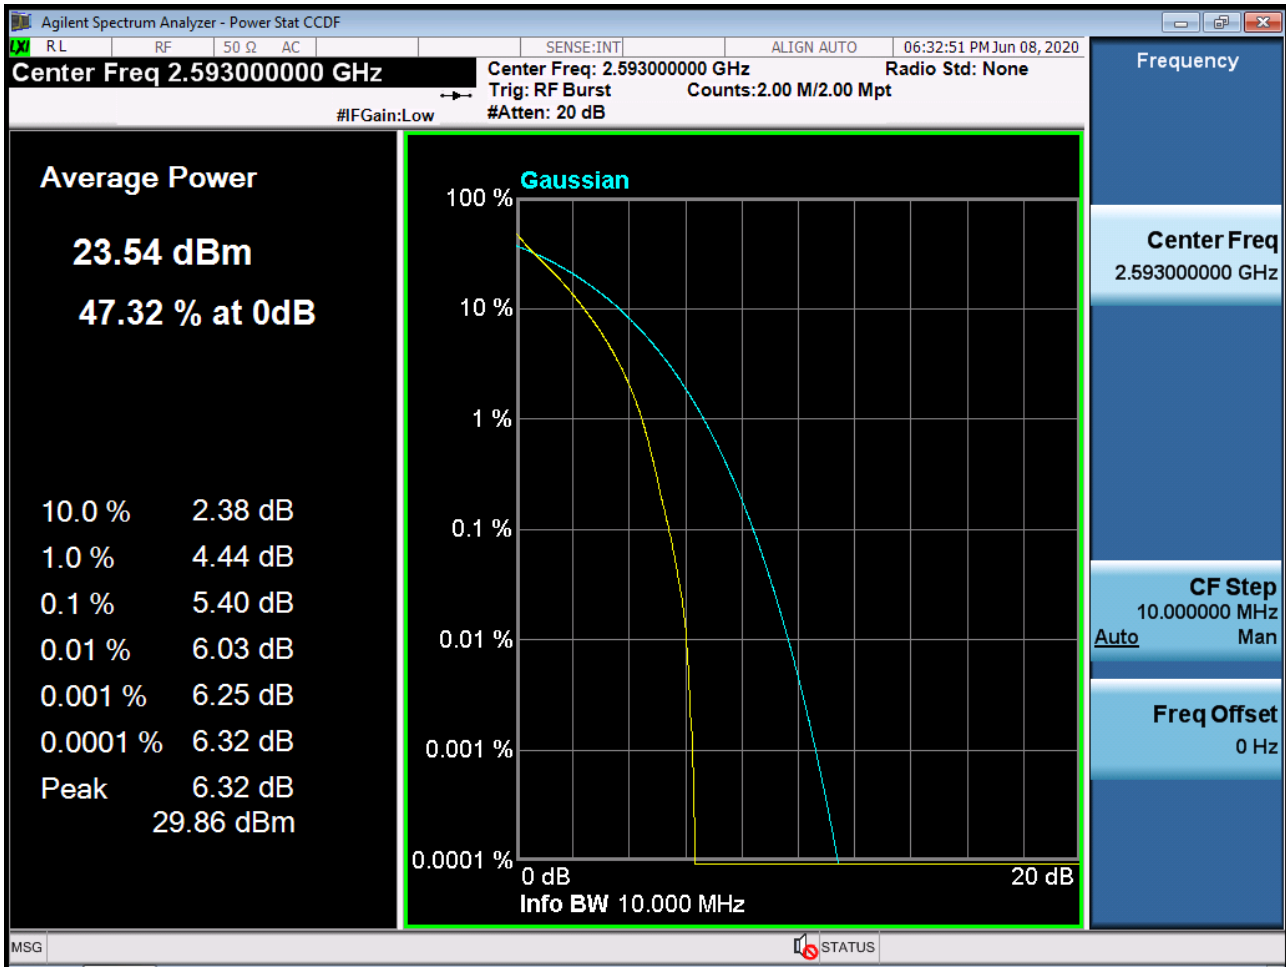


PAR Plot (10M BW\_Ch.40620\_16QAM\_RB50\_0) (POWER CLASS 3)

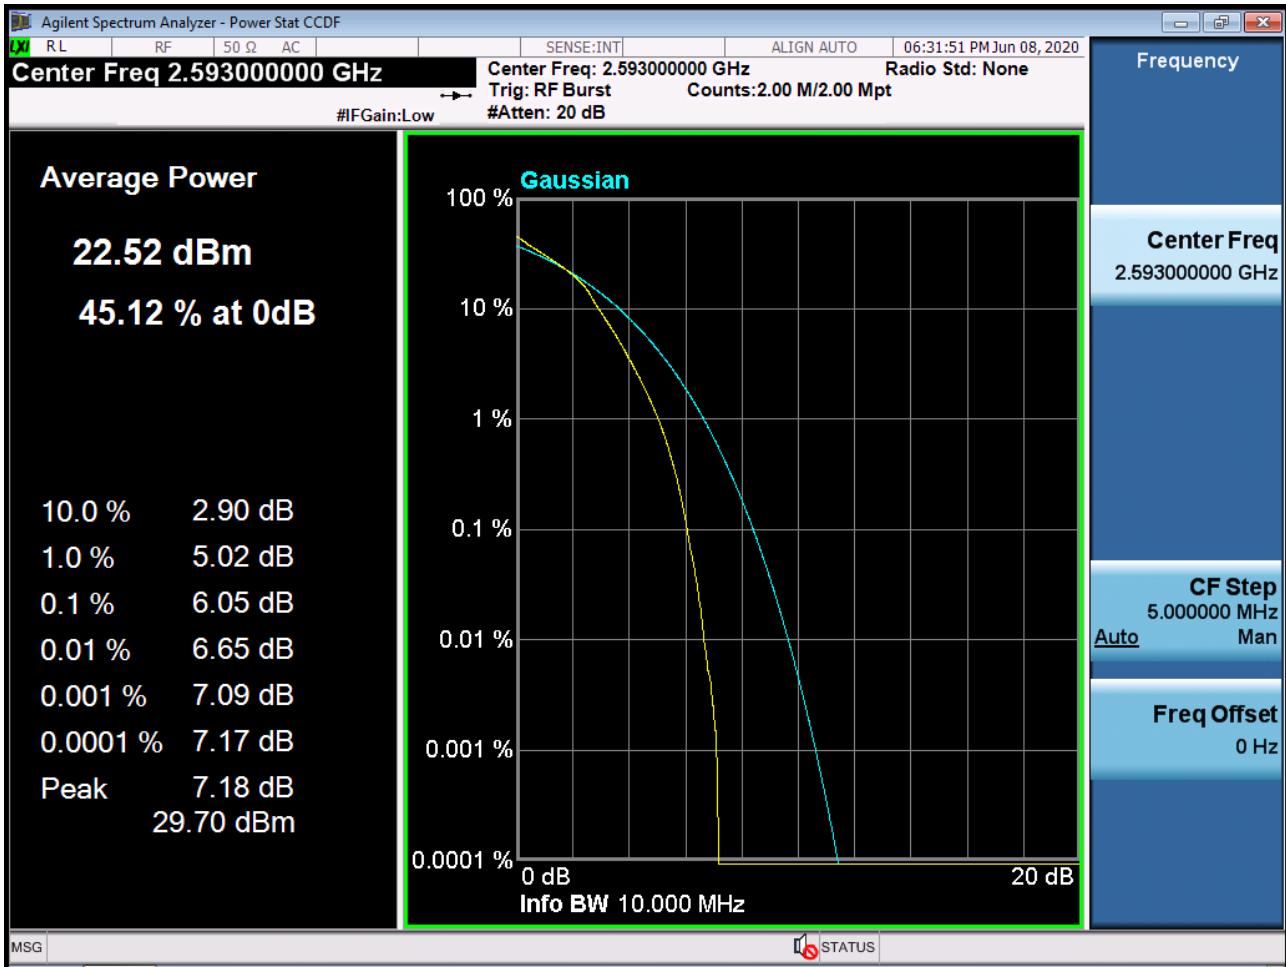


PAR Plot (10M BW\_Ch.40620\_64QAM\_RB50\_0) (POWER CLASS 3)

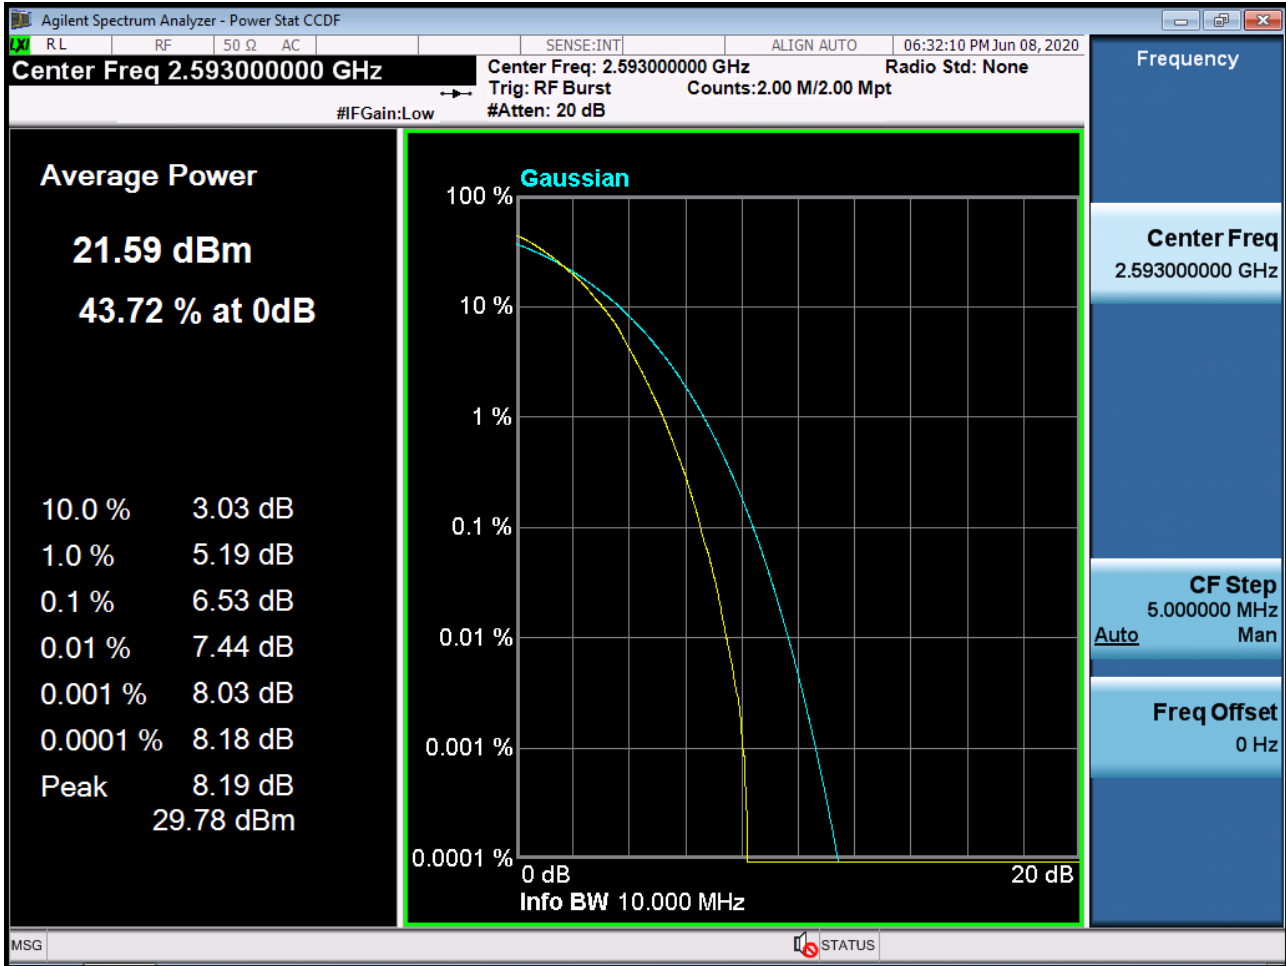


PAR Plot (10M BW\_Ch.40620\_256QAM\_RB50\_0) (POWER CLASS 3)

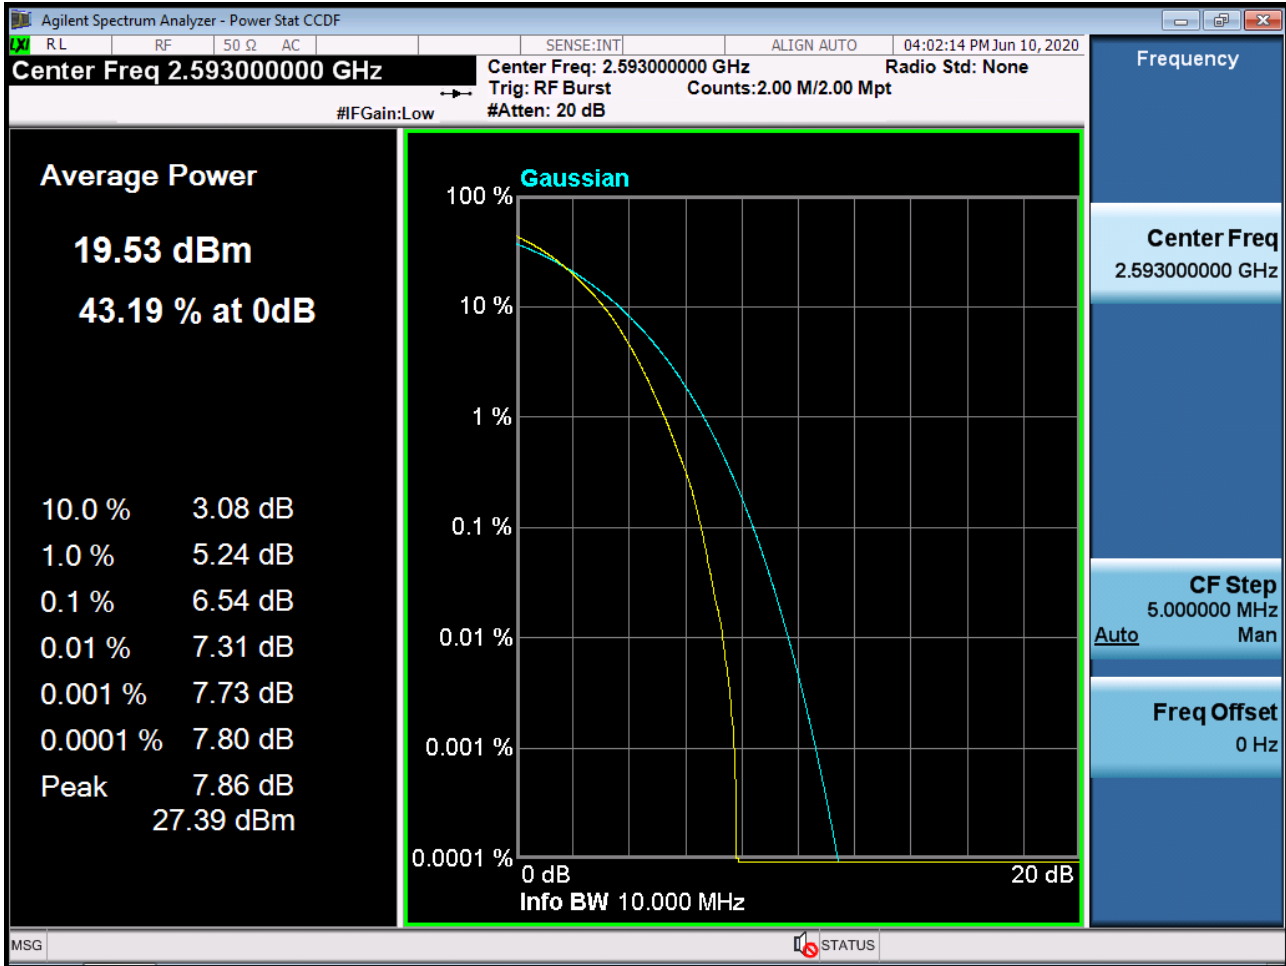

PAR Plot (15M BW\_Ch.40620\_QPSK\_RB75\_0) (POWER CLASS 3)

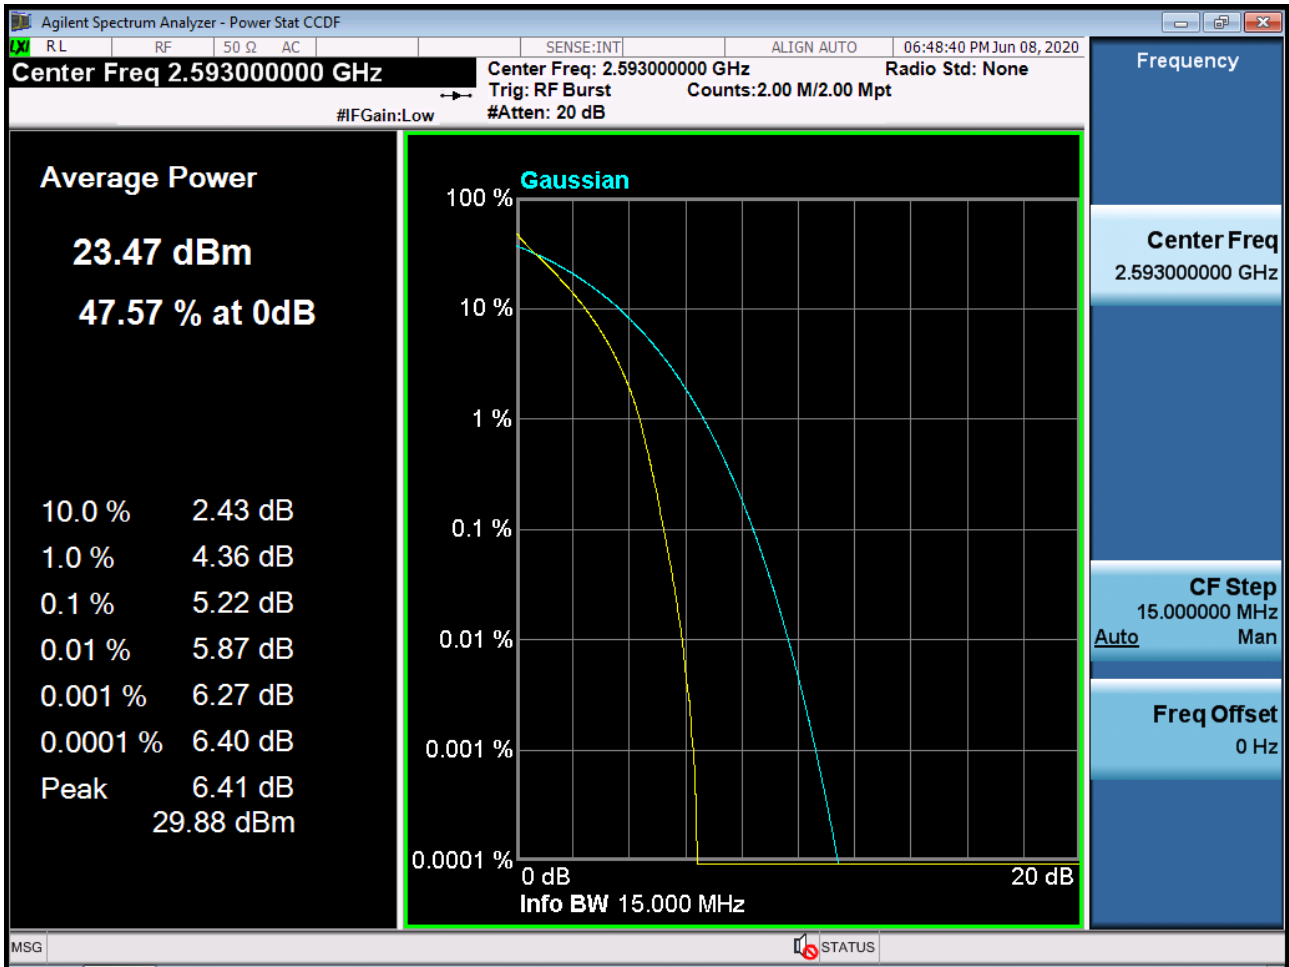


PAR Plot (15M BW\_Ch.40620\_16QAM\_RB75\_0) (POWER CLASS 3)

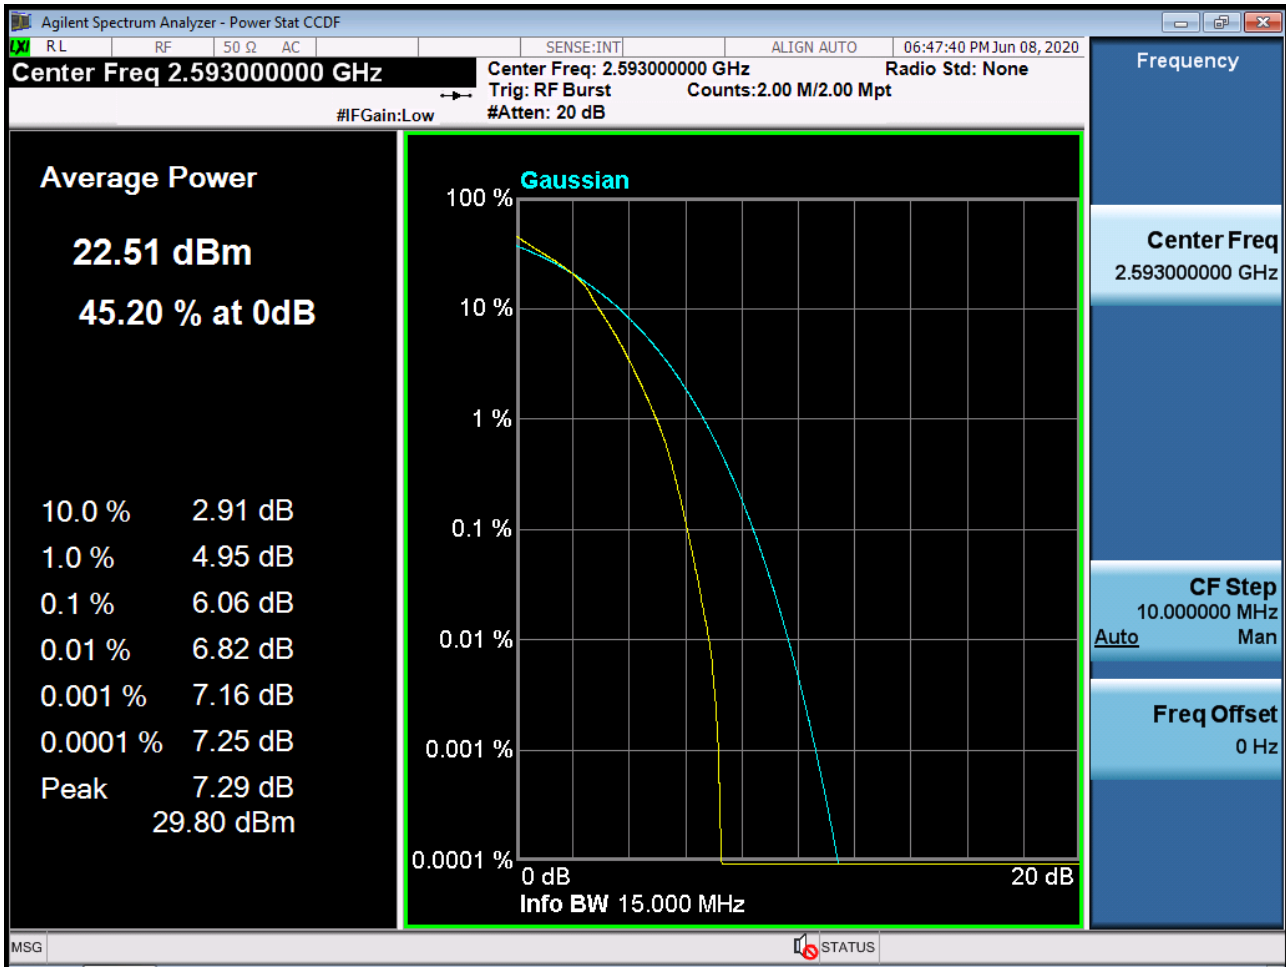





PAR Plot (15M BW\_Ch.40620\_64QAM\_RB75\_0) (POWER CLASS 3)

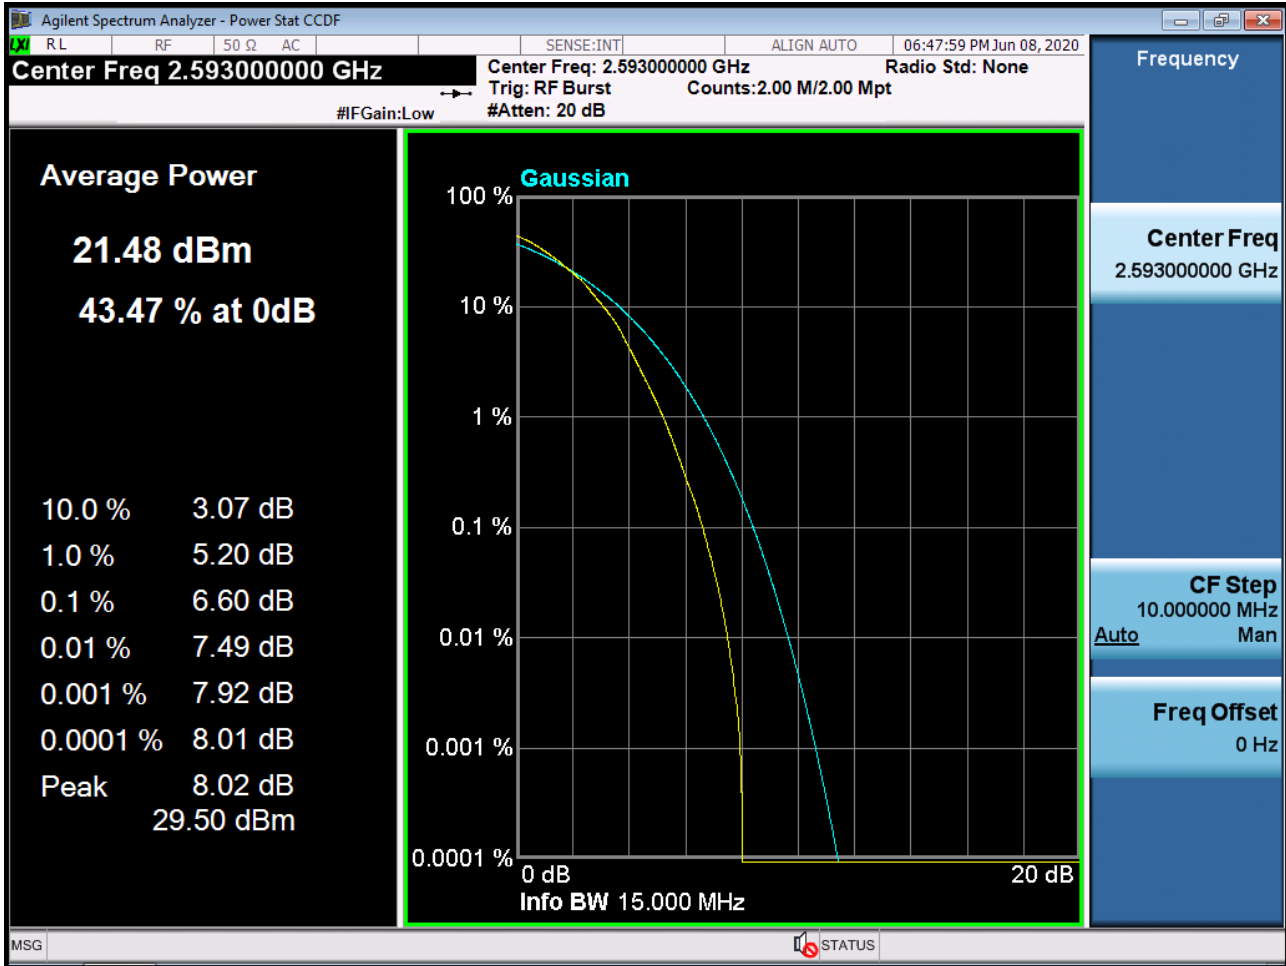


PAR Plot (15M BW\_Ch.40620\_256QAM\_RB75\_0) (POWER CLASS 3)

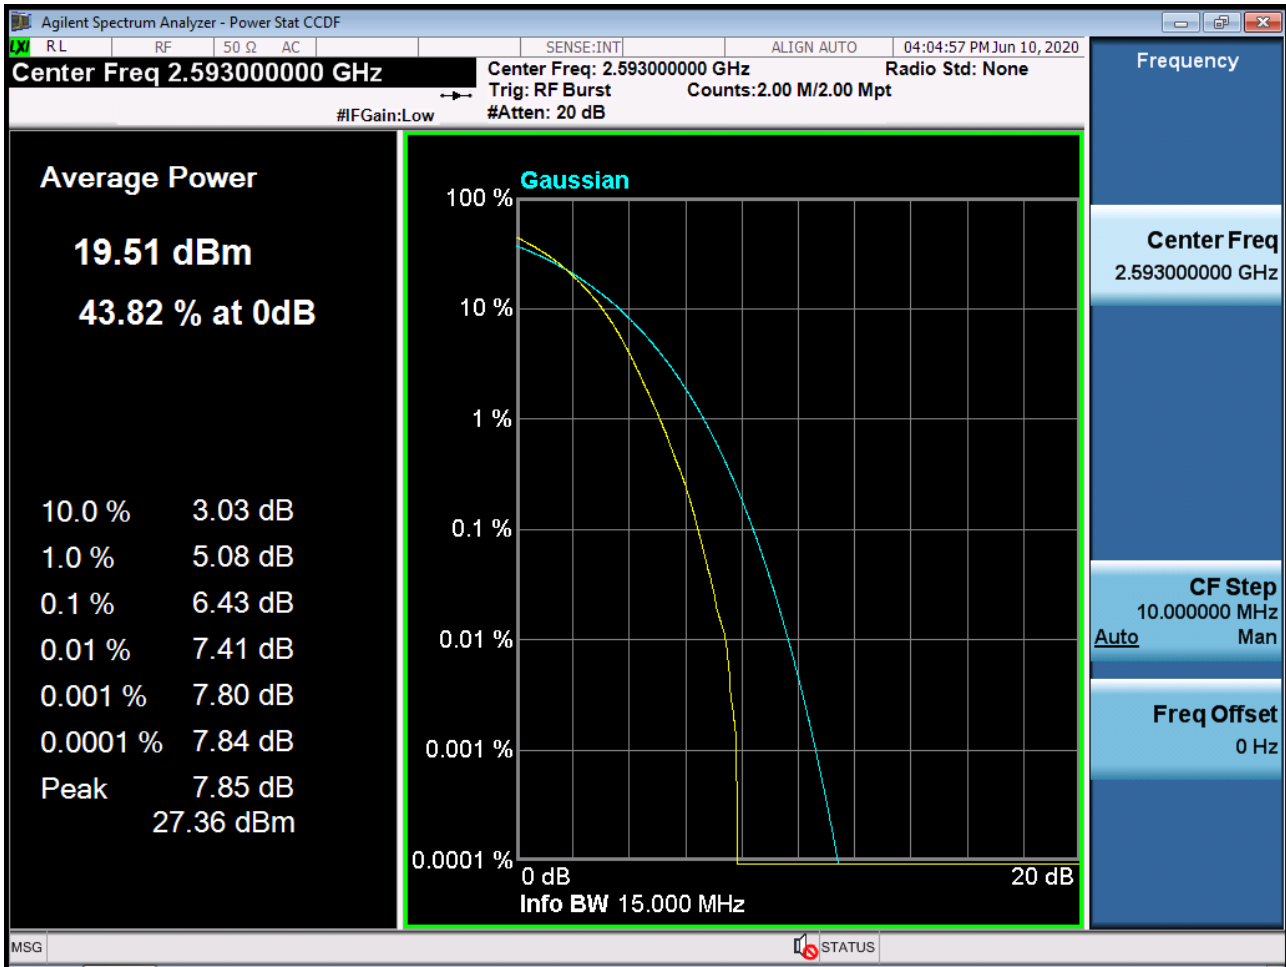


PAR Plot (20M BW\_Ch.40620\_QPSK\_RB100\_0) (POWER CLASS 3)

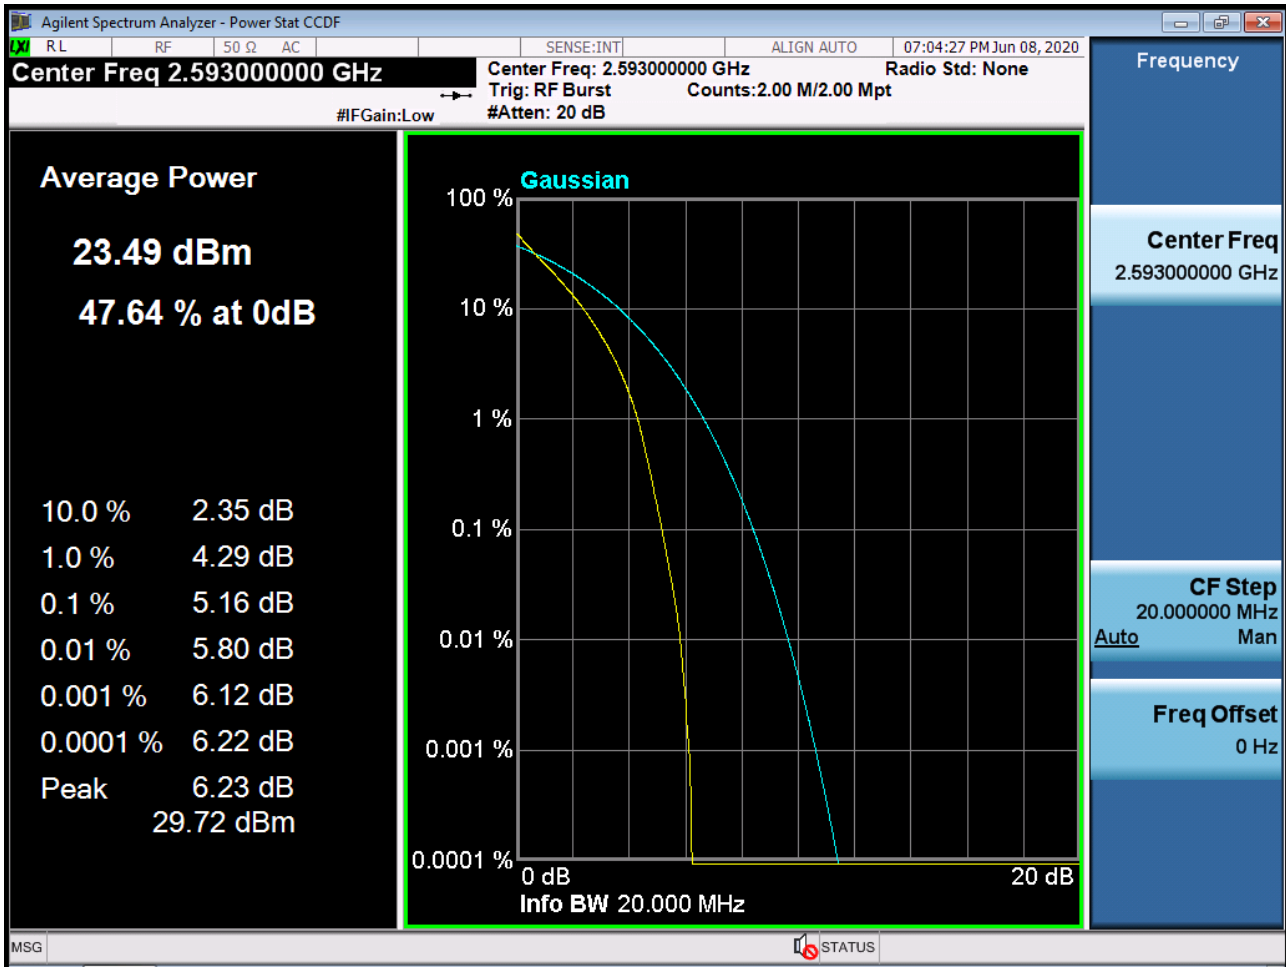


PAR Plot (20M BW\_Ch.40620\_16QAM\_RB100\_0) (POWER CLASS 3)

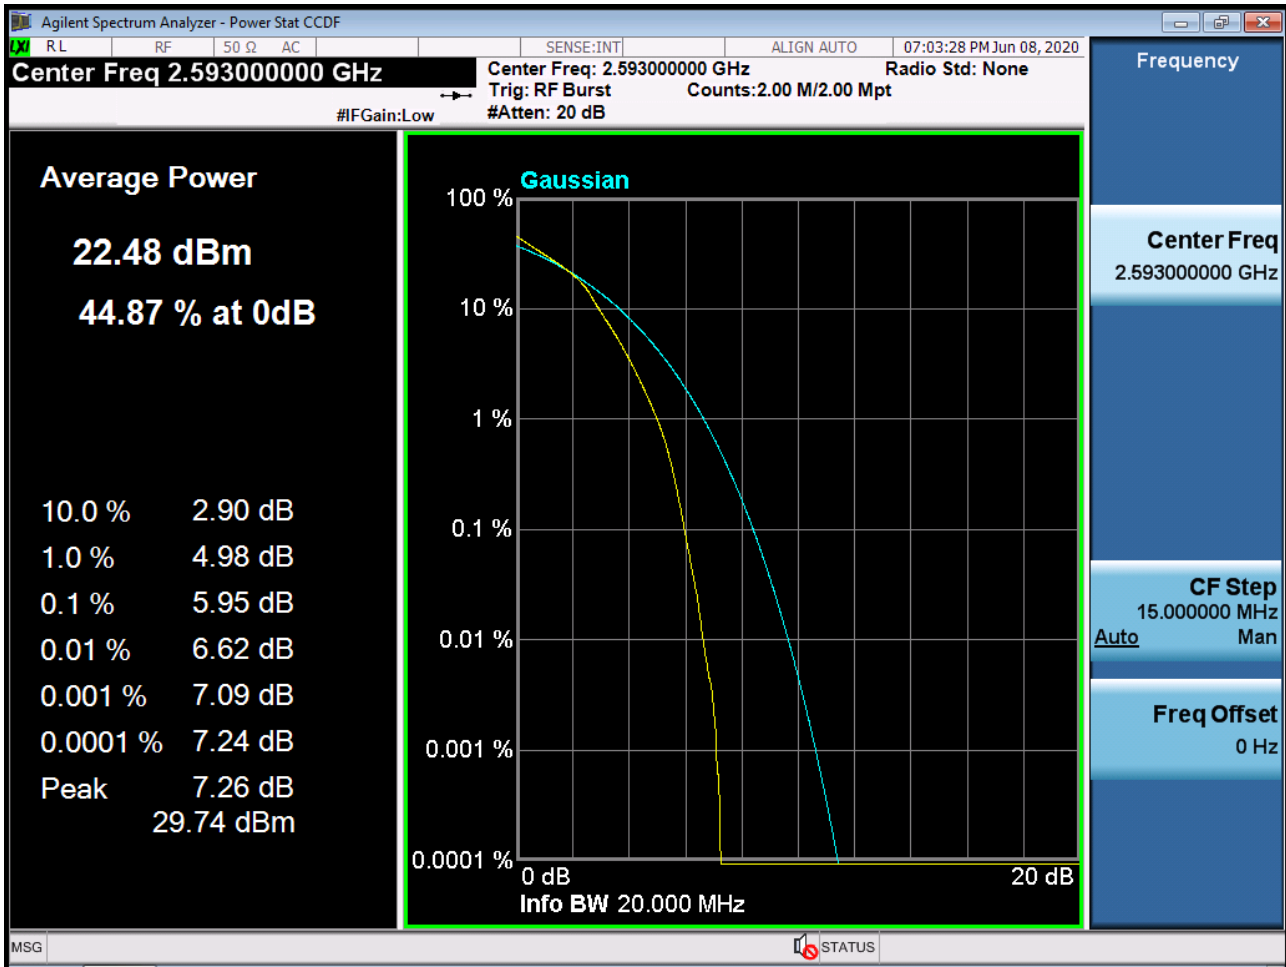


PAR Plot (20M BW\_Ch.40620\_64QAM\_RB100\_0) (POWER CLASS 3)

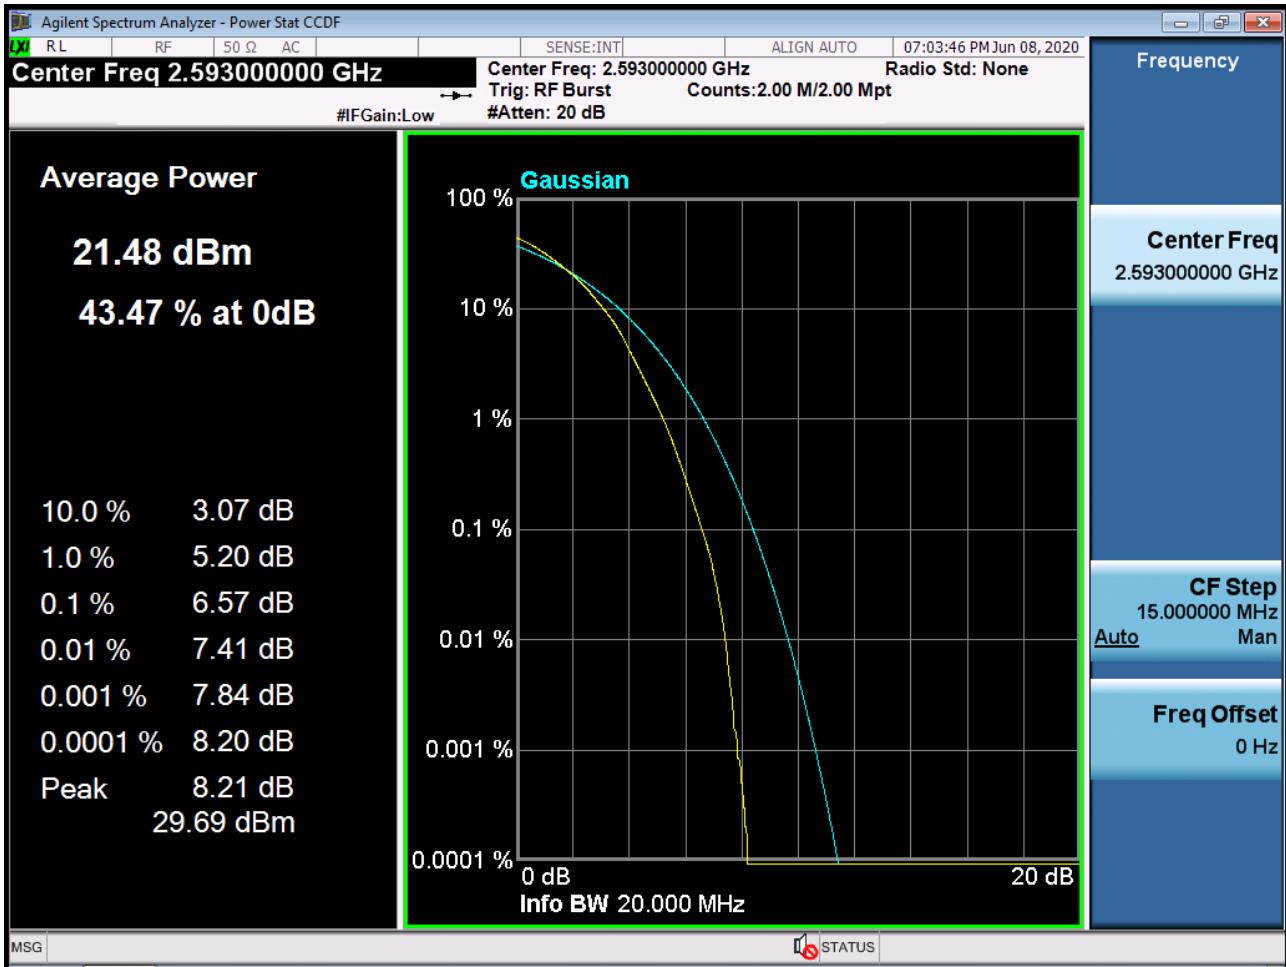


PAR Plot (20M BW\_Ch.40620\_256QAM\_RB100\_0) (POWER CLASS 3)

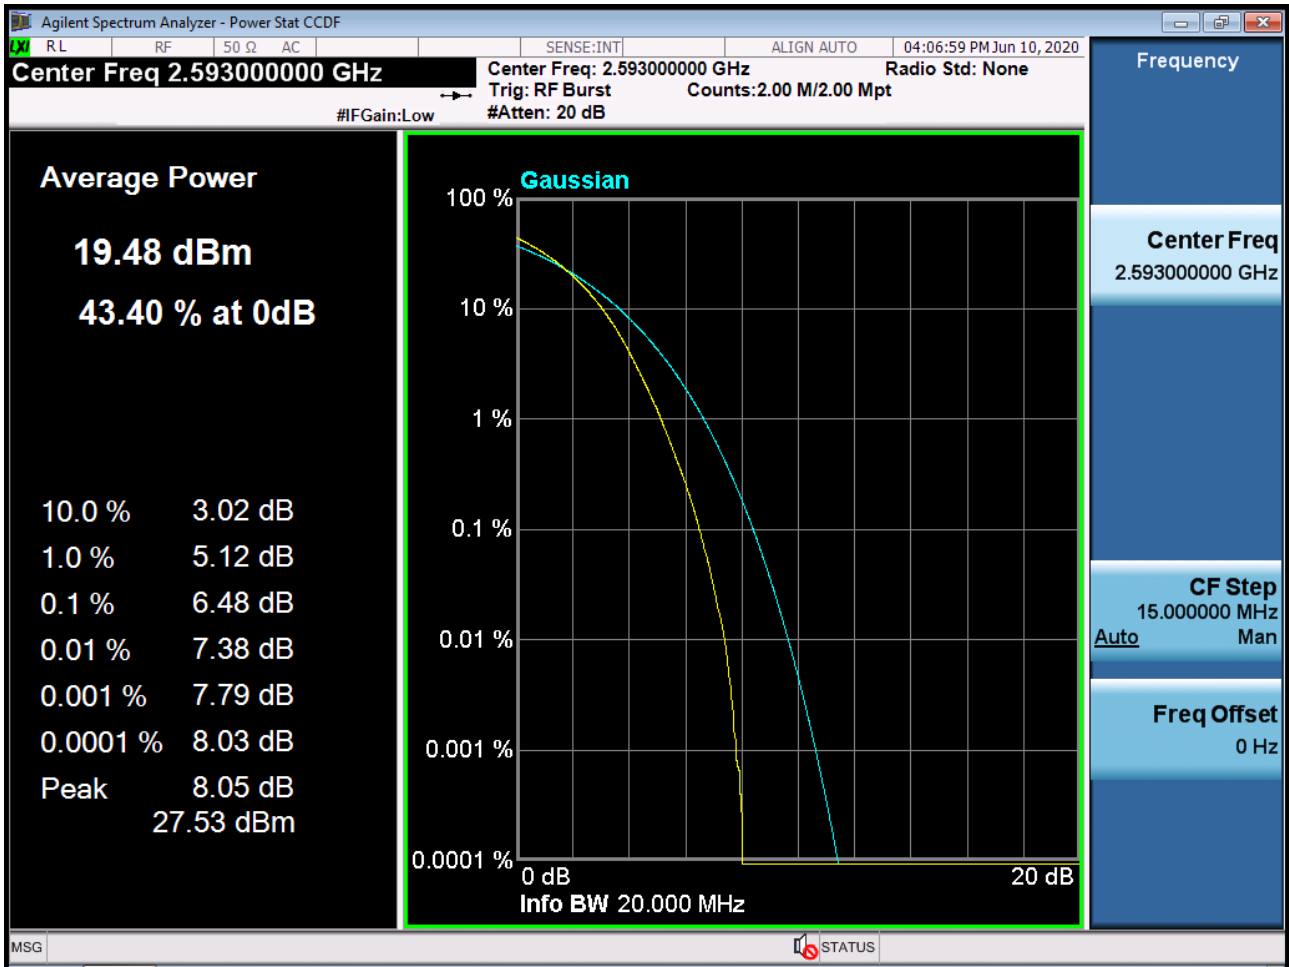

PAR Plot (5M BW\_Ch.40620\_QPSK\_RB25\_0) (POWER CLASS 2)

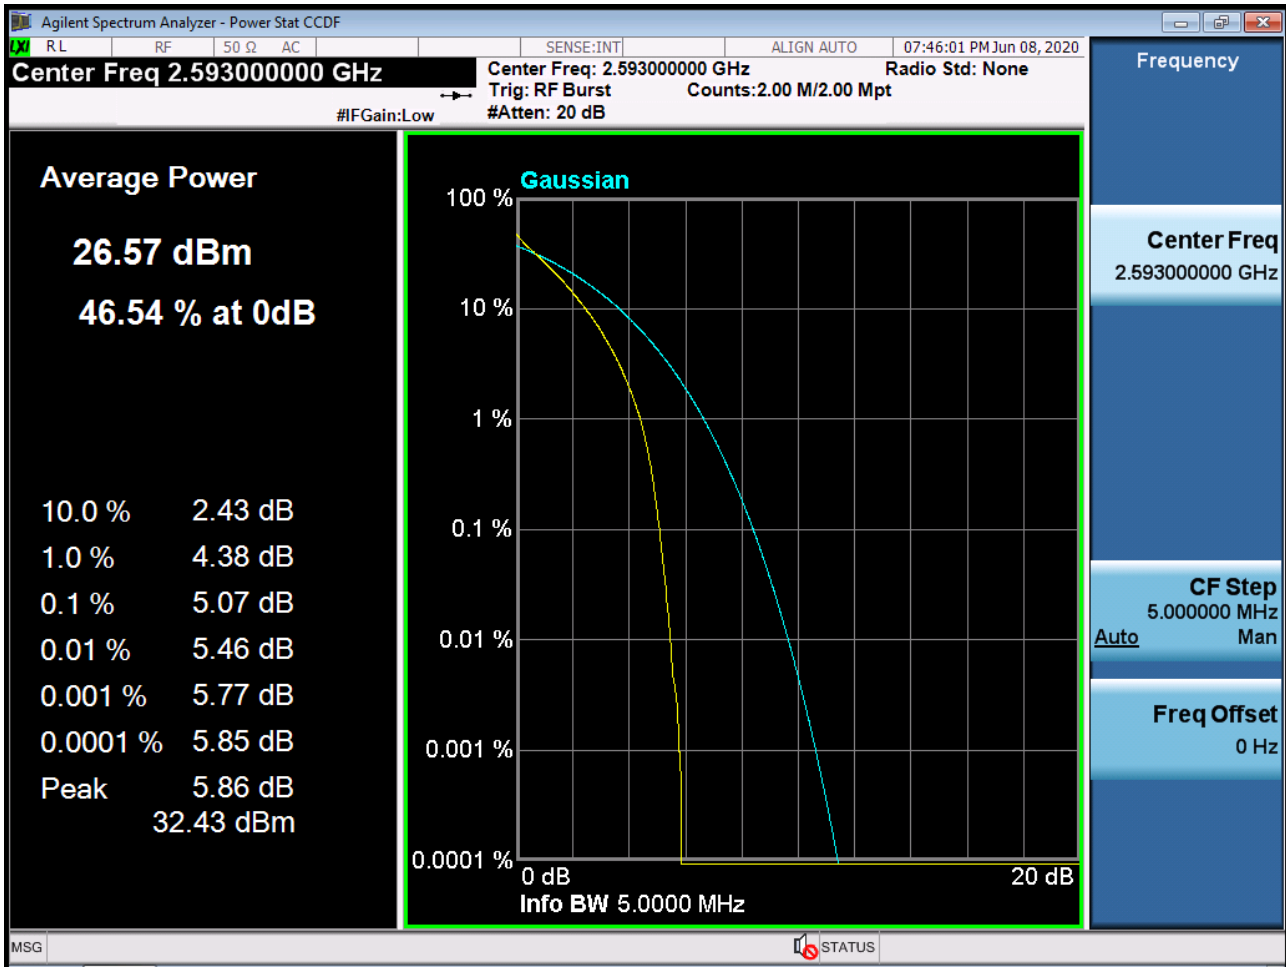


PAR Plot (5M BW\_Ch.40620\_16QAM\_RB25\_0) (POWER CLASS 2)

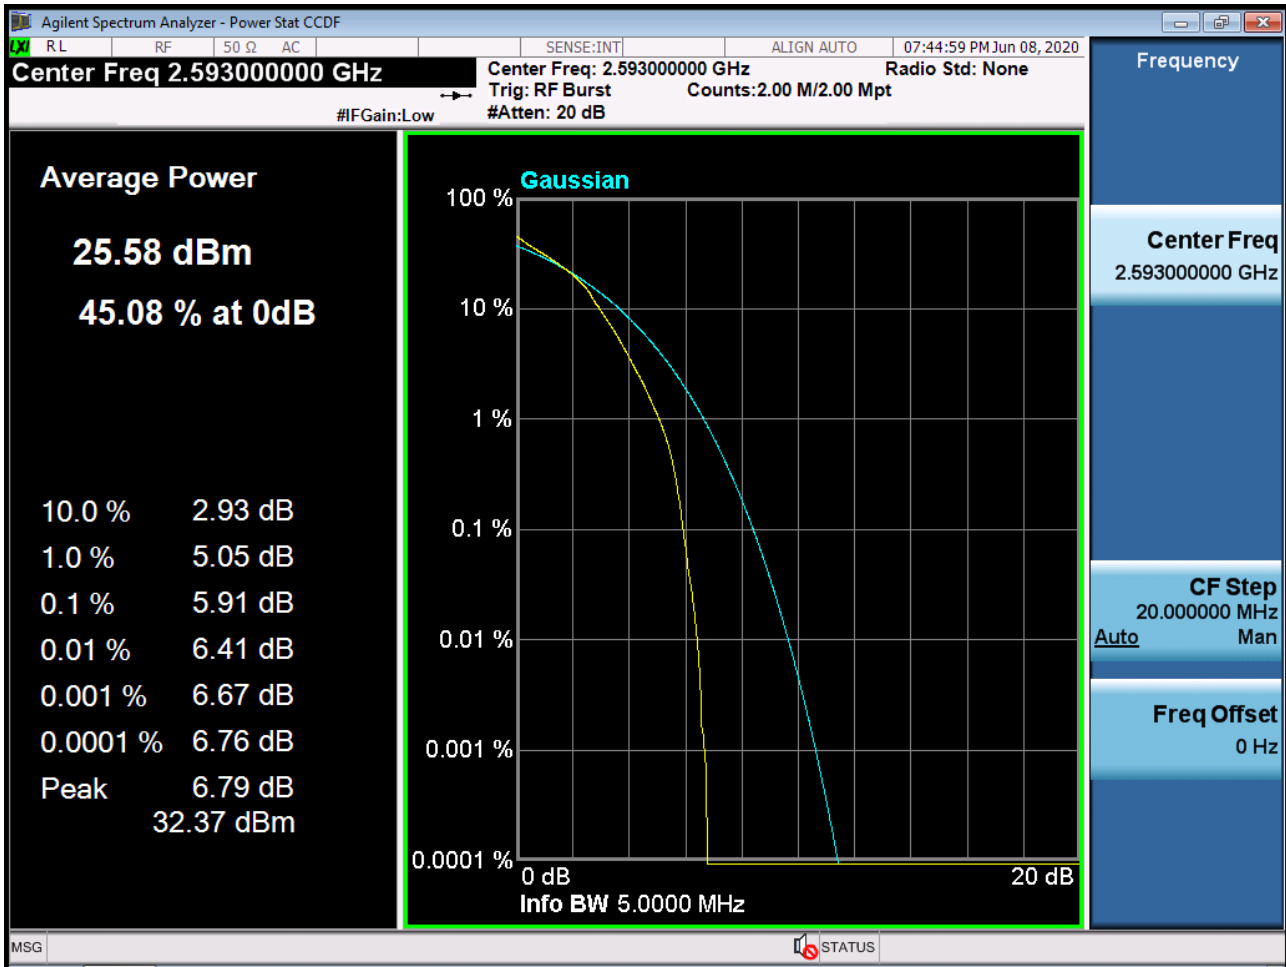





PAR Plot (5M BW\_Ch.40620\_64QAM\_RB25\_0) (POWER CLASS 2)

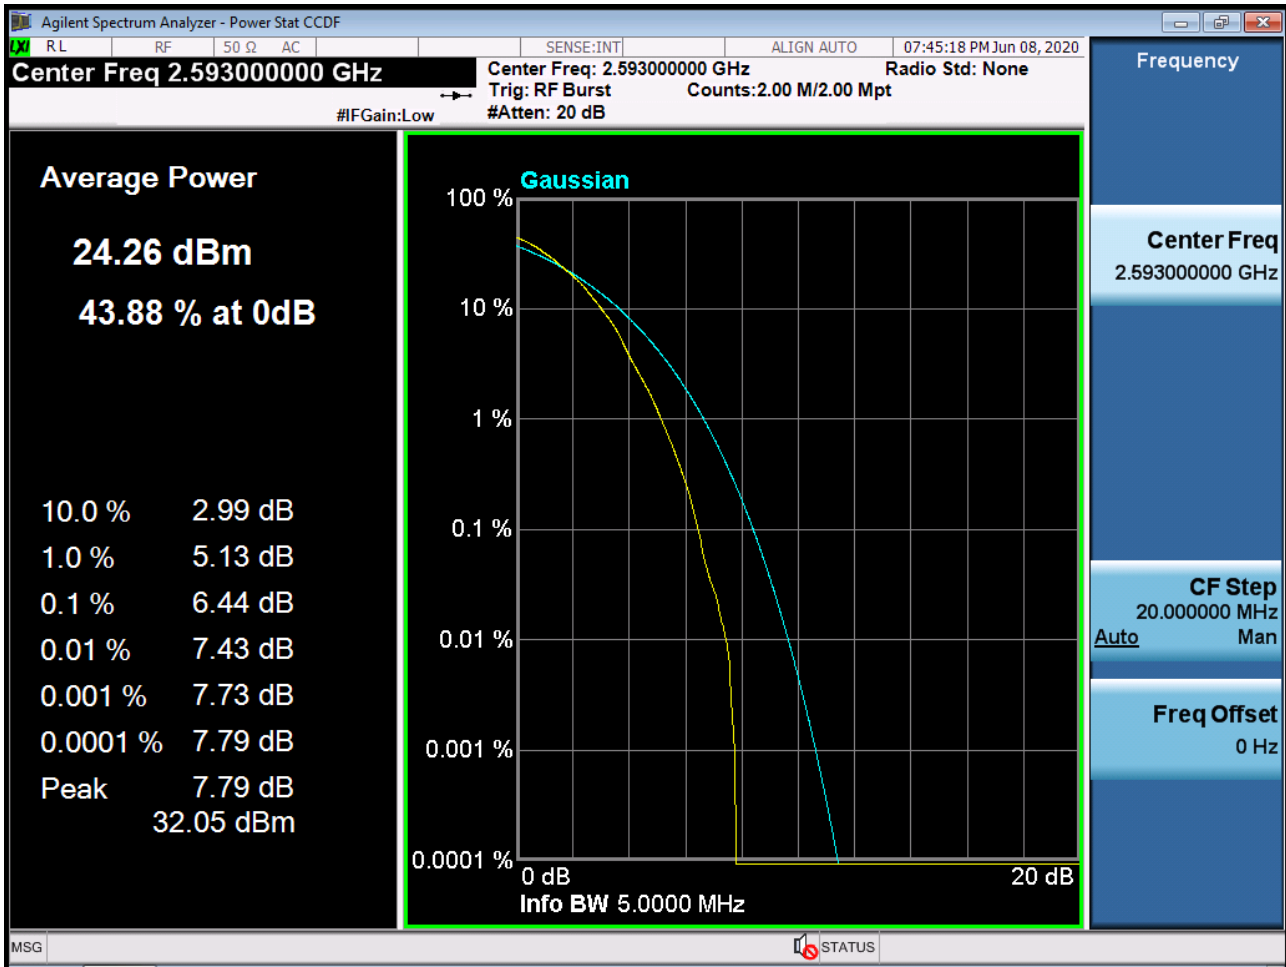


PAR Plot (5M BW\_Ch.40620\_256QAM\_RB25\_0) (POWER CLASS 2)

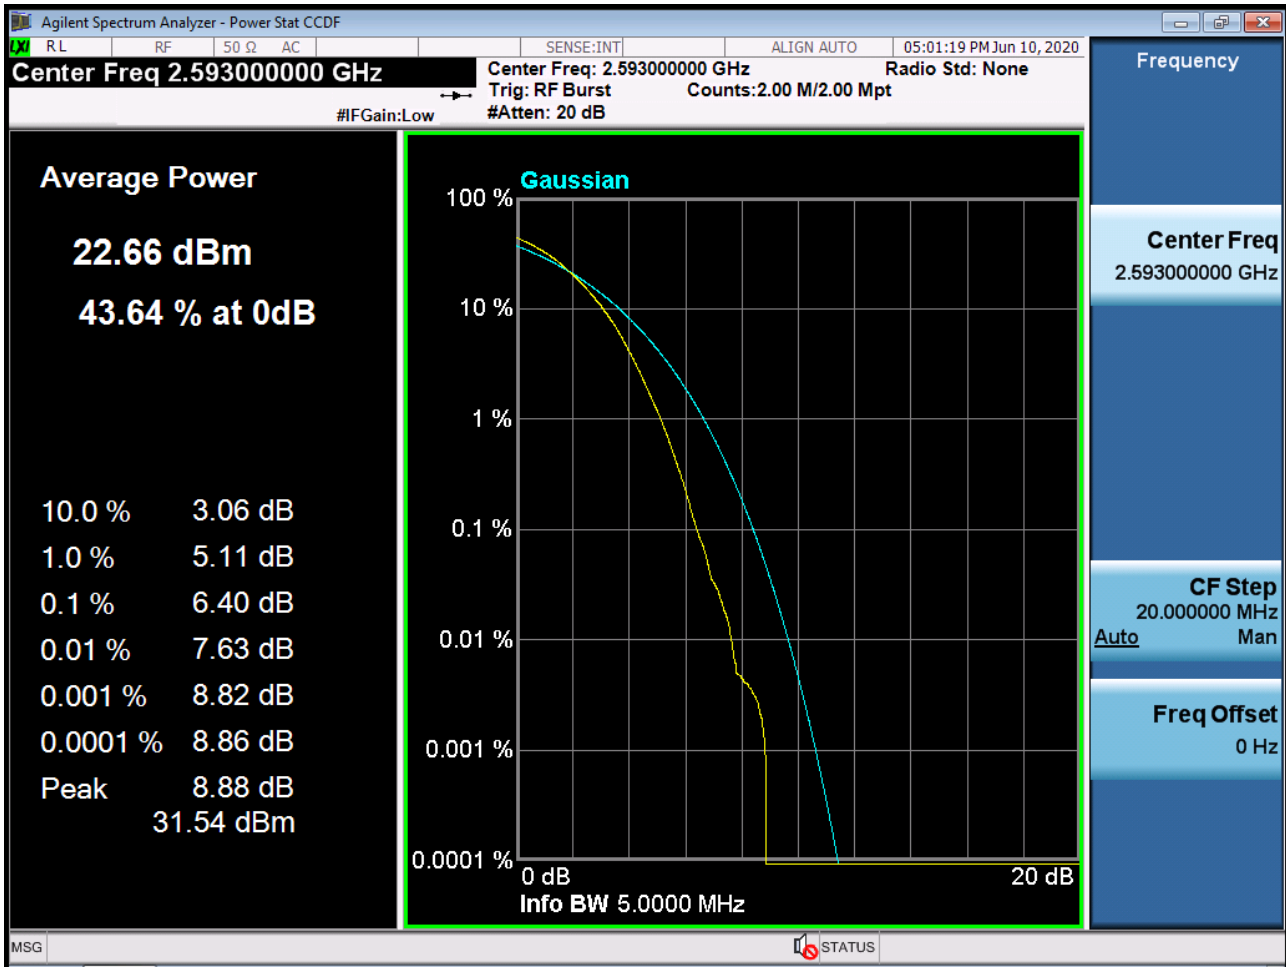


PAR Plot (10M BW\_Ch.40620\_QPSK\_RB50\_0) (POWER CLASS 2)

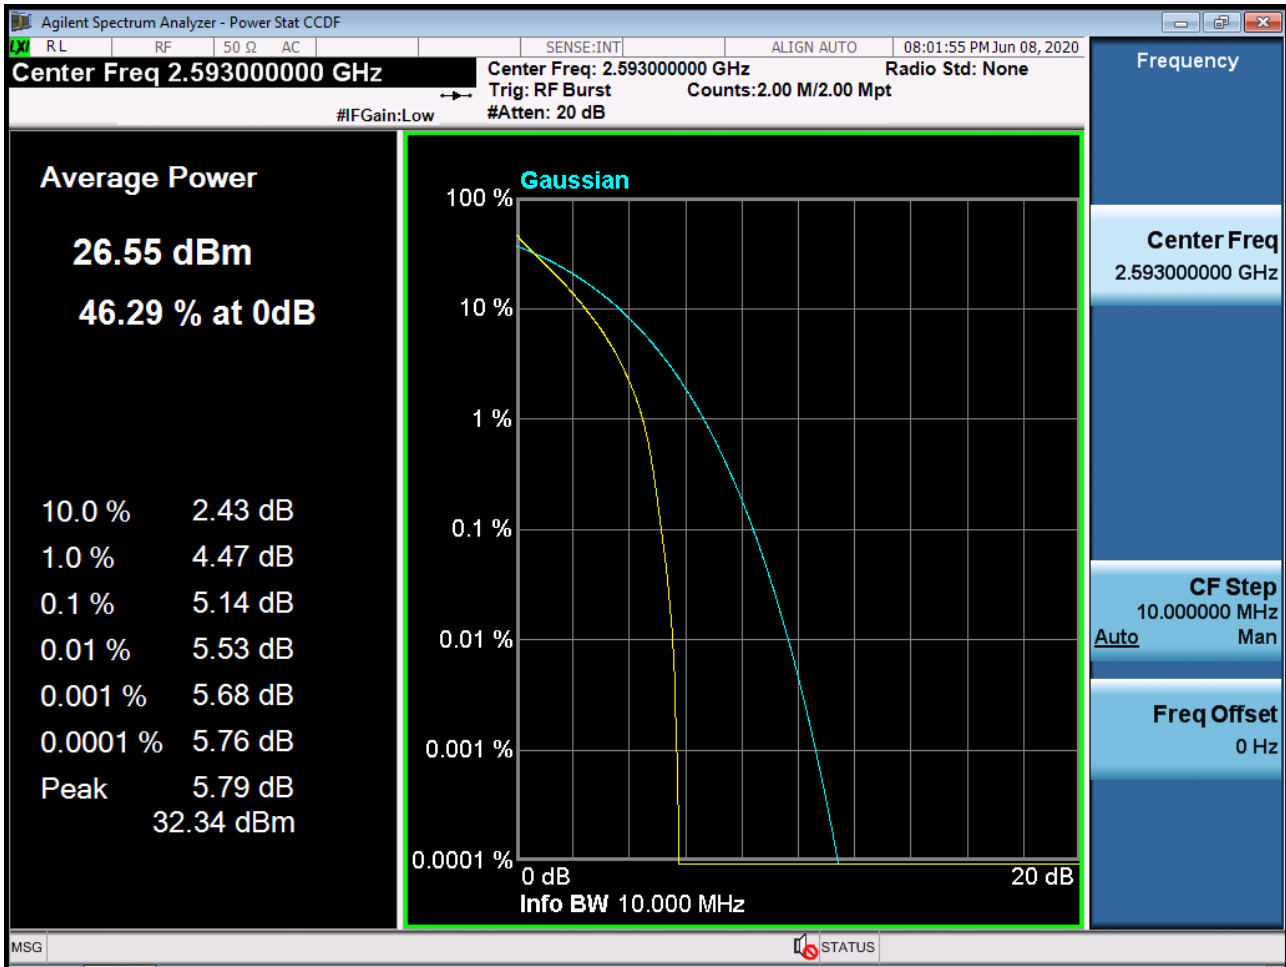


PAR Plot (10M BW\_Ch.40620\_16QAM\_RB50\_0) (POWER CLASS 2)

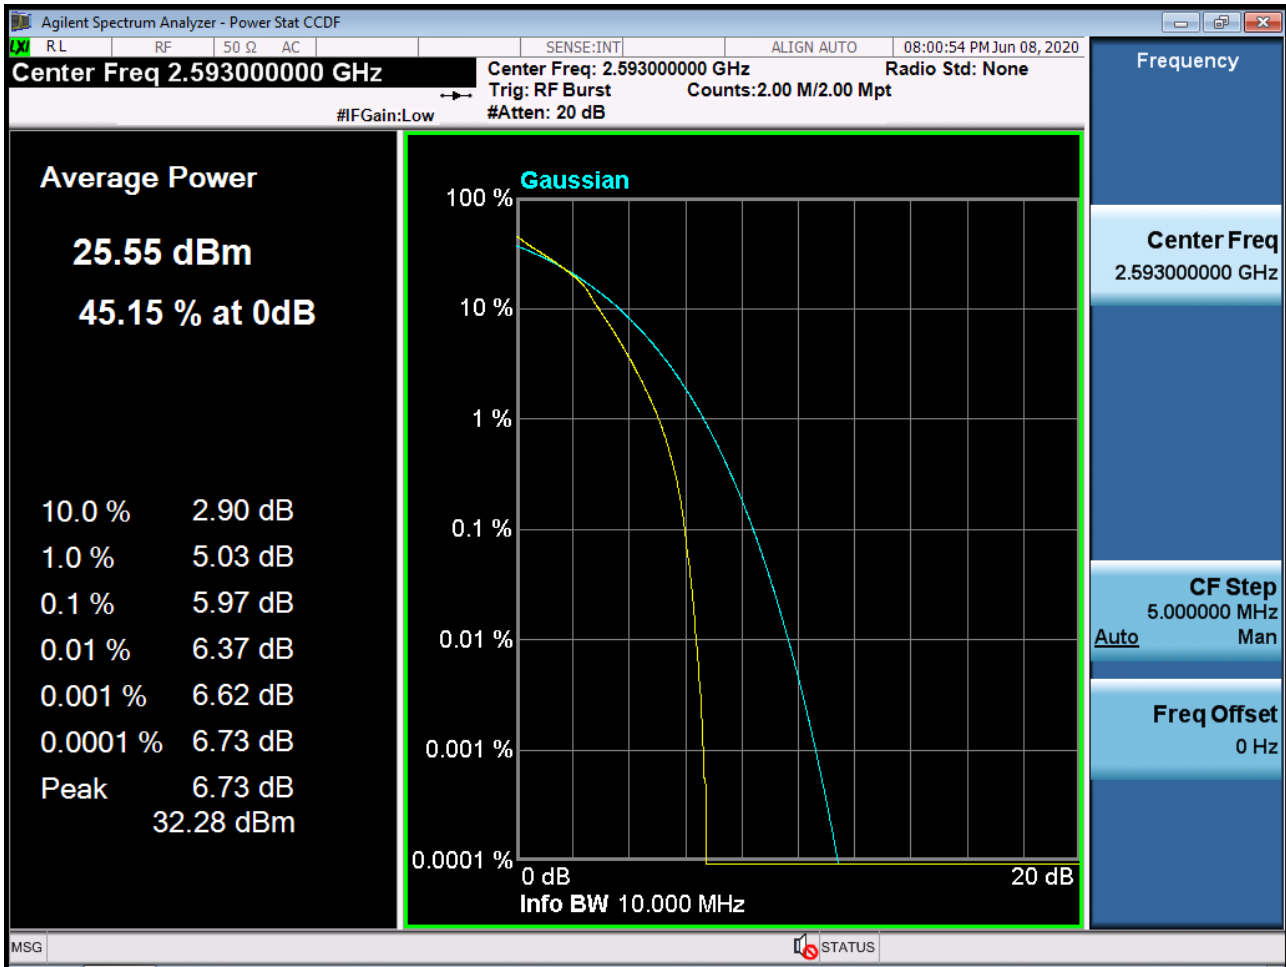


PAR Plot (10M BW\_Ch.40620\_64QAM\_RB50\_0) (POWER CLASS 2)

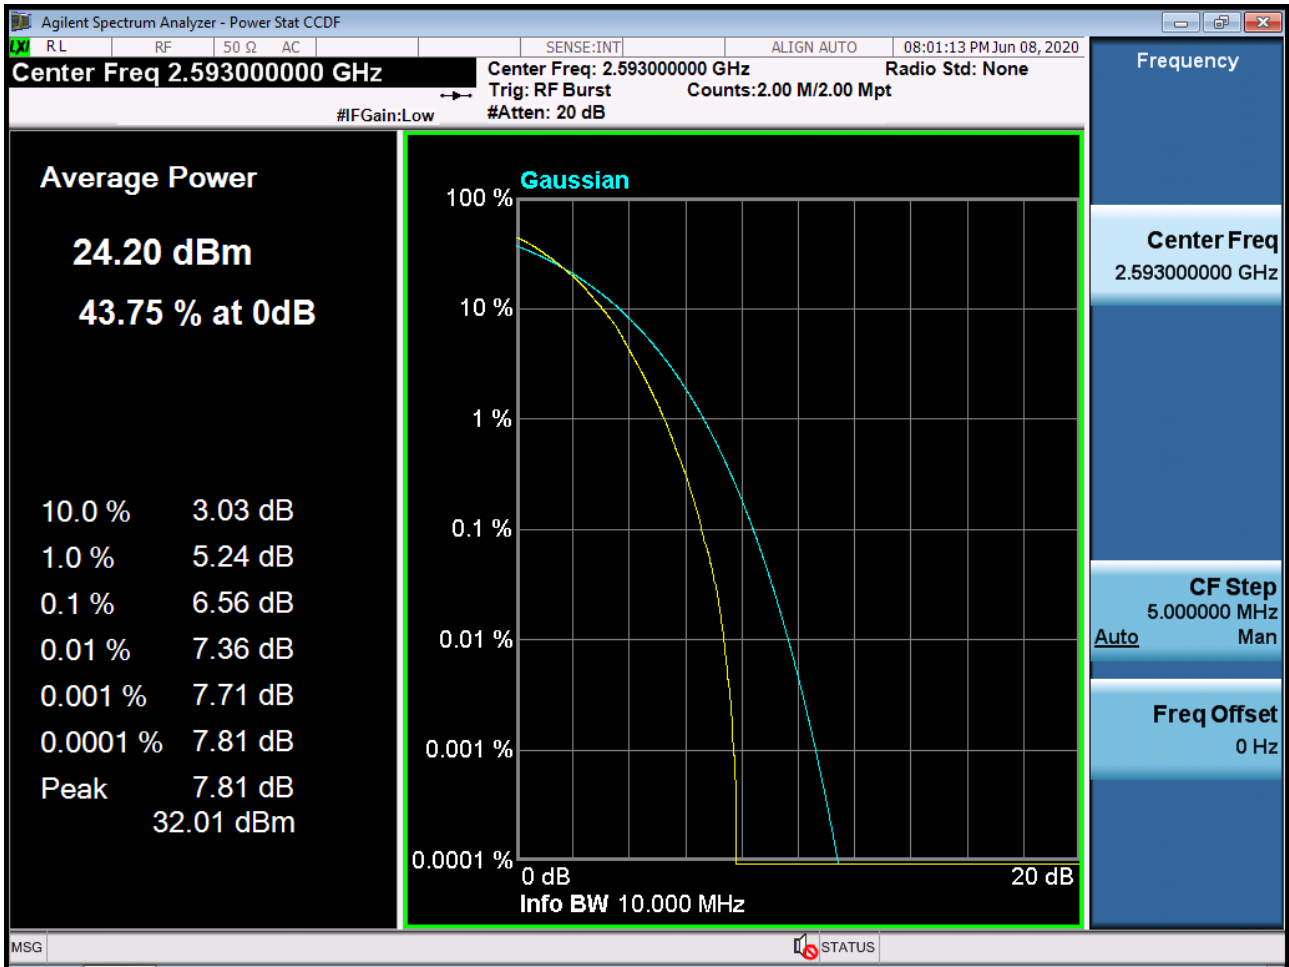


PAR Plot (10M BW\_Ch.40620\_256QAM\_RB50\_0) (POWER CLASS 2)

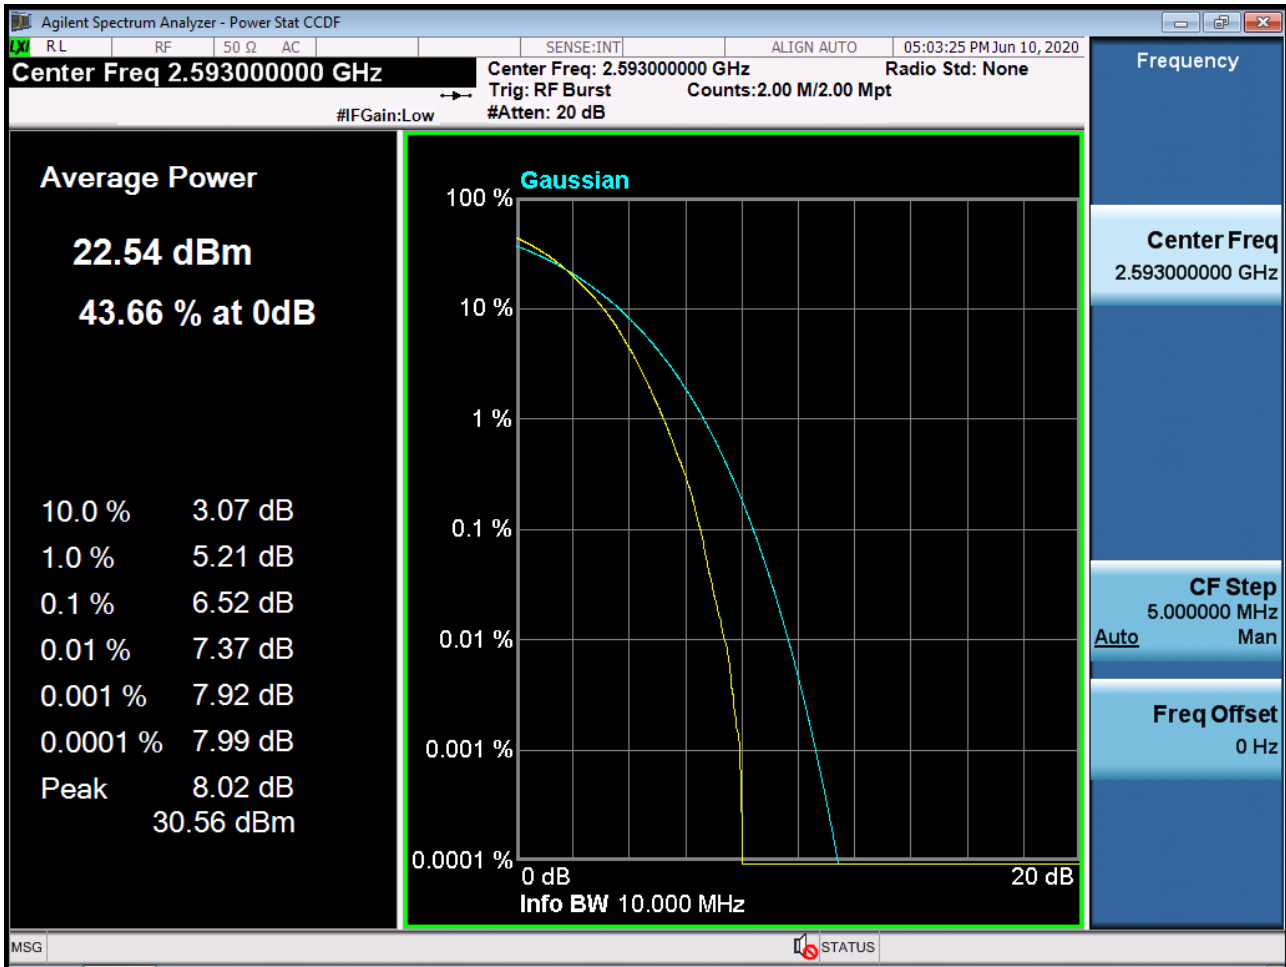

PAR Plot (15M BW\_Ch.40620\_QPSK\_RB75\_0) (POWER CLASS 2)

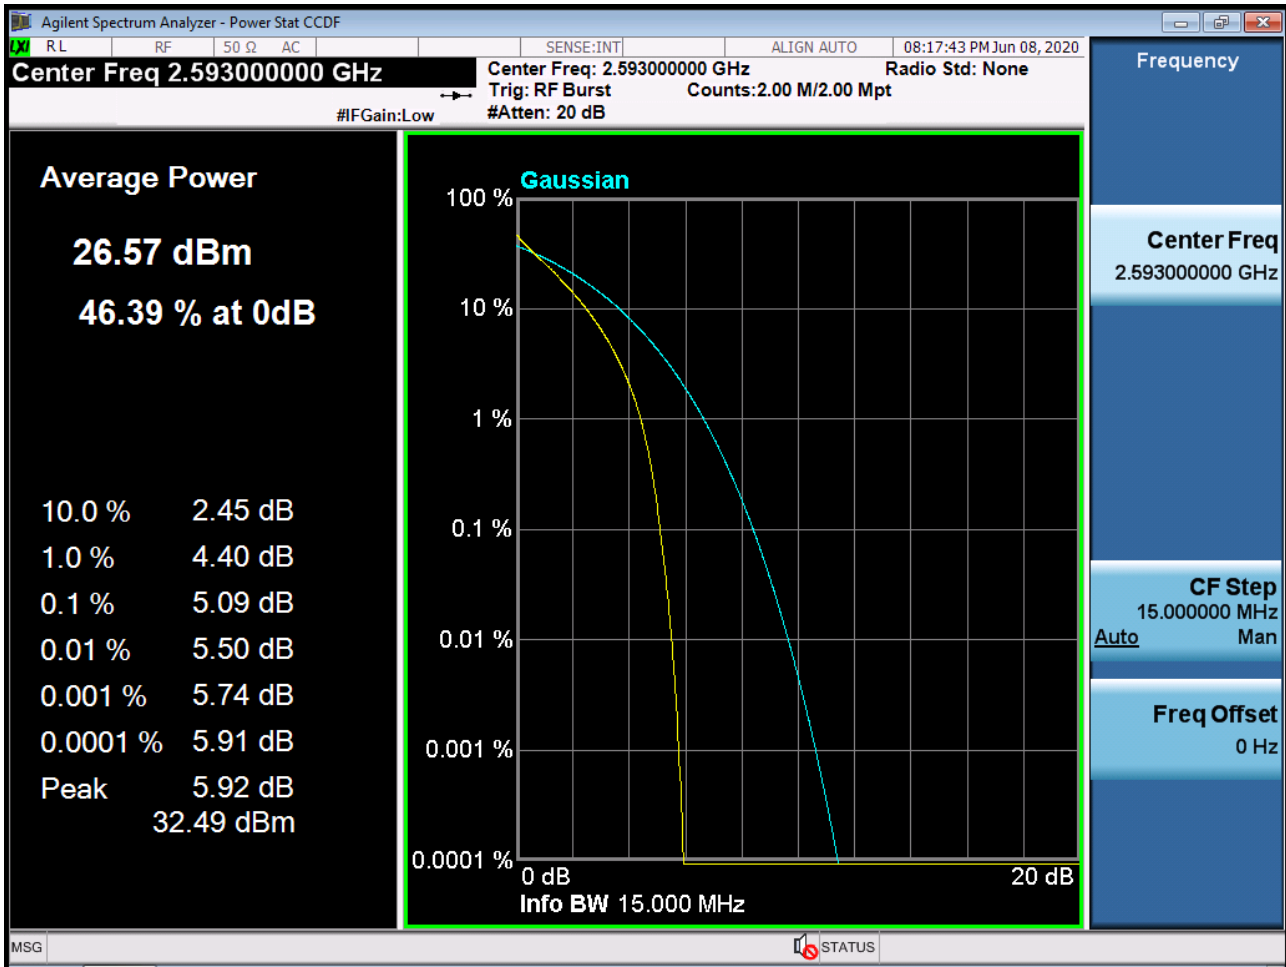


PAR Plot (15M BW\_Ch.40620\_16QAM\_RB75\_0) (POWER CLASS 2)

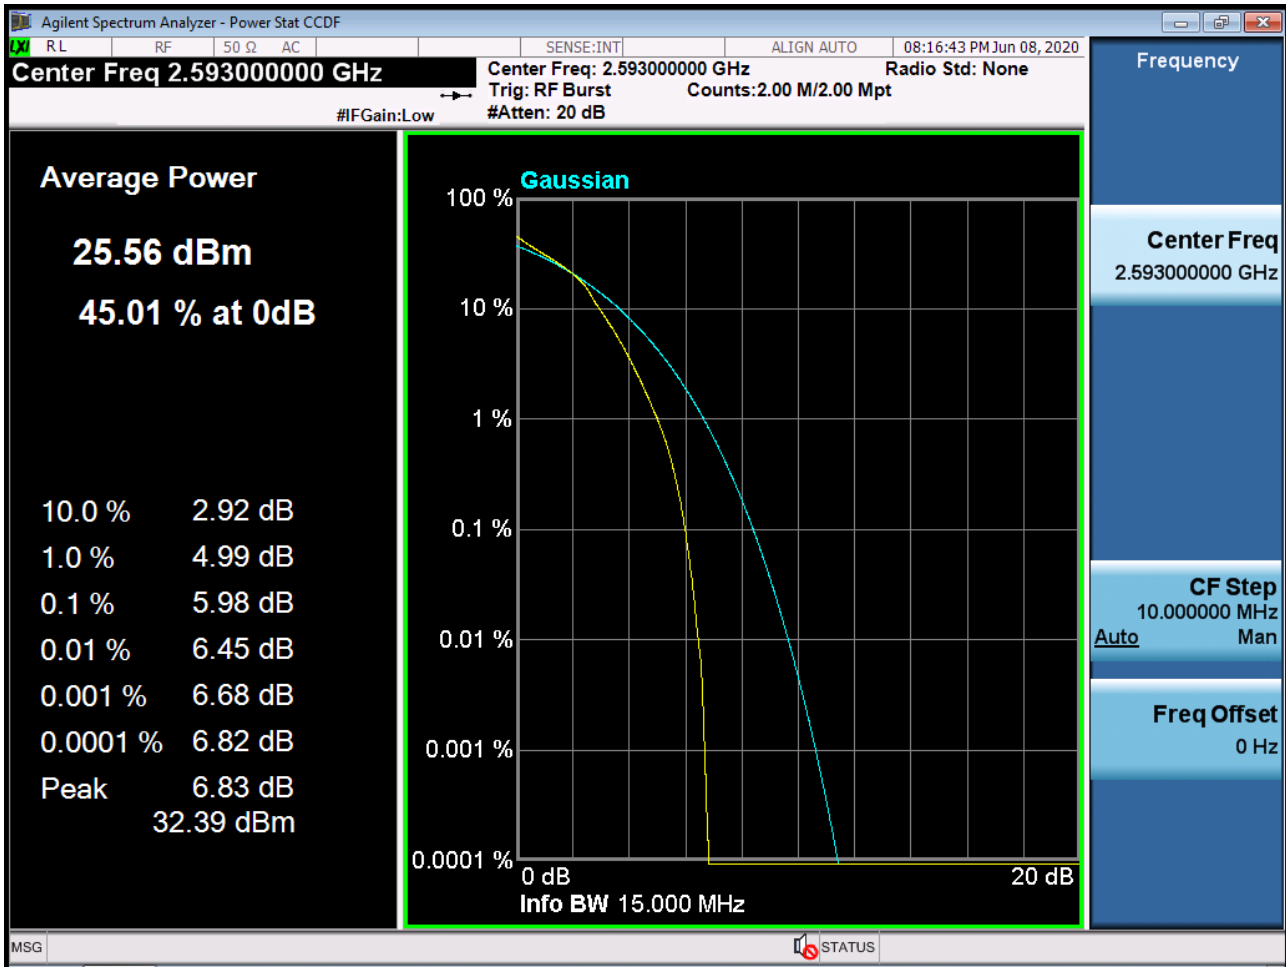





PAR Plot (15M BW\_Ch.40620\_64QAM\_RB75\_0) (POWER CLASS 2)

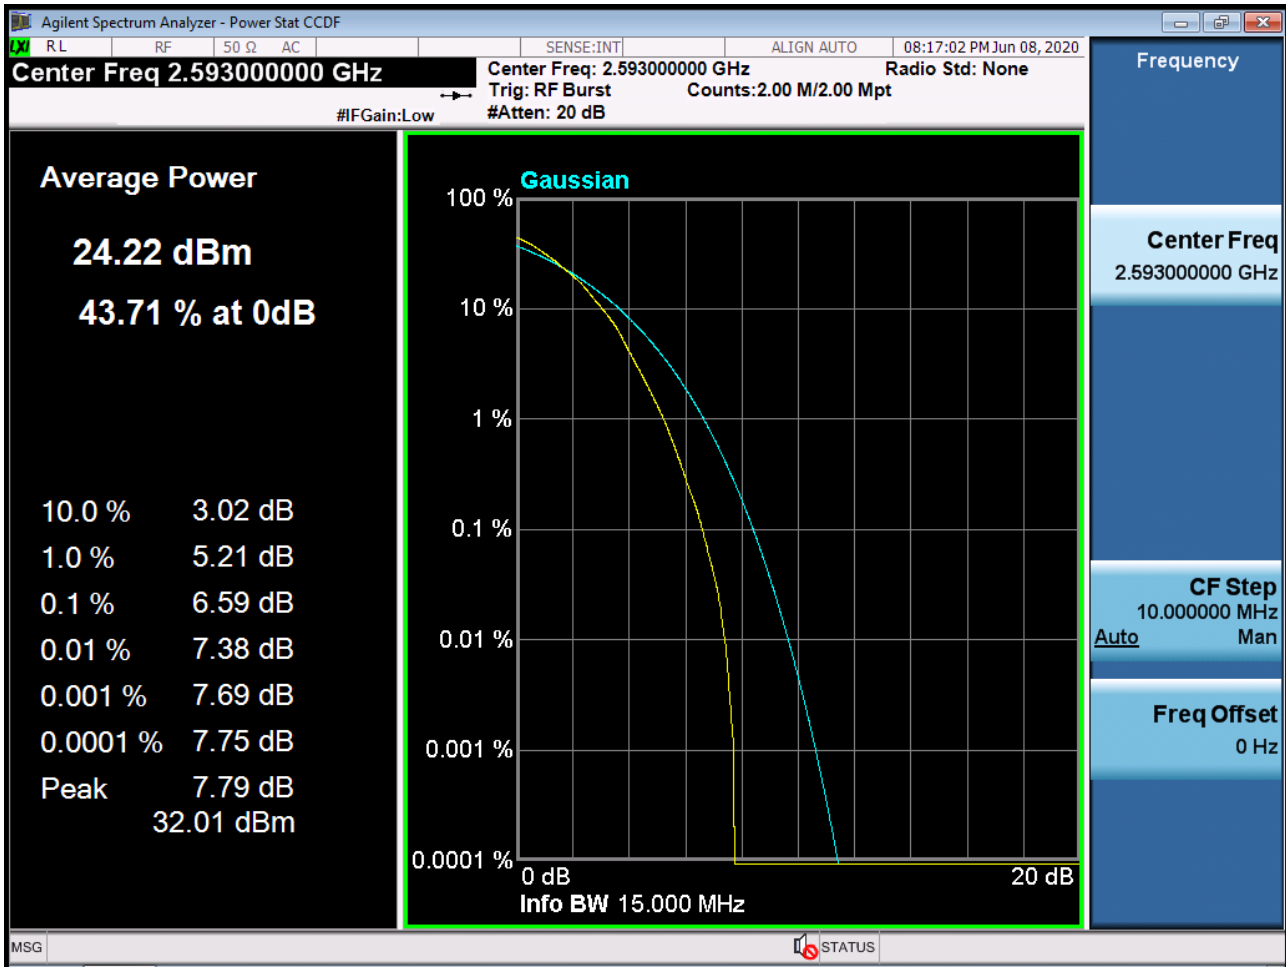


PAR Plot (15M BW\_Ch.40620\_256QAM\_RB75\_0) (POWER CLASS 2)

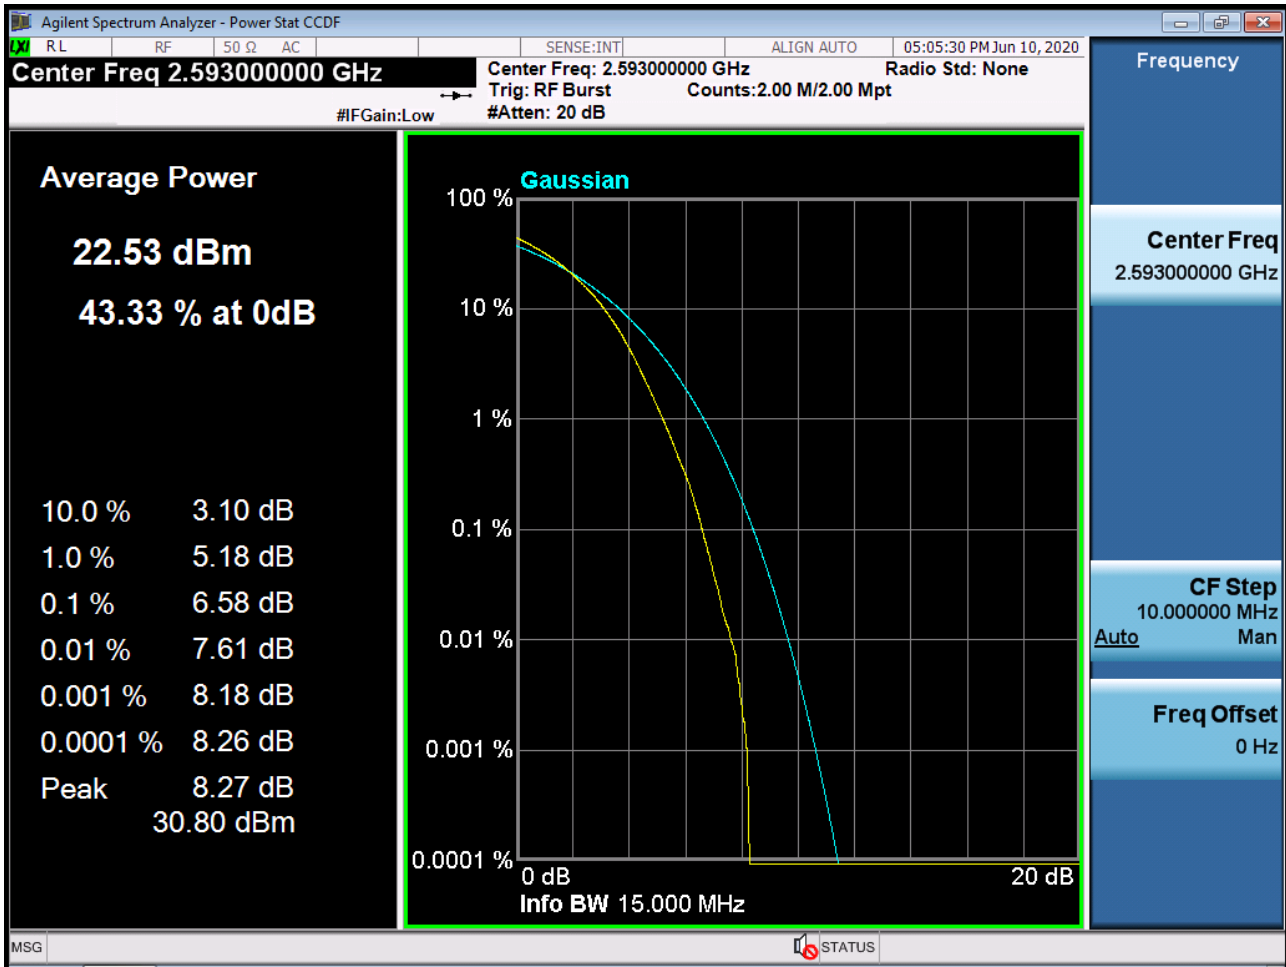


PAR Plot (20M BW\_Ch.40620\_QPSK\_RB100\_0) (POWER CLASS 2)

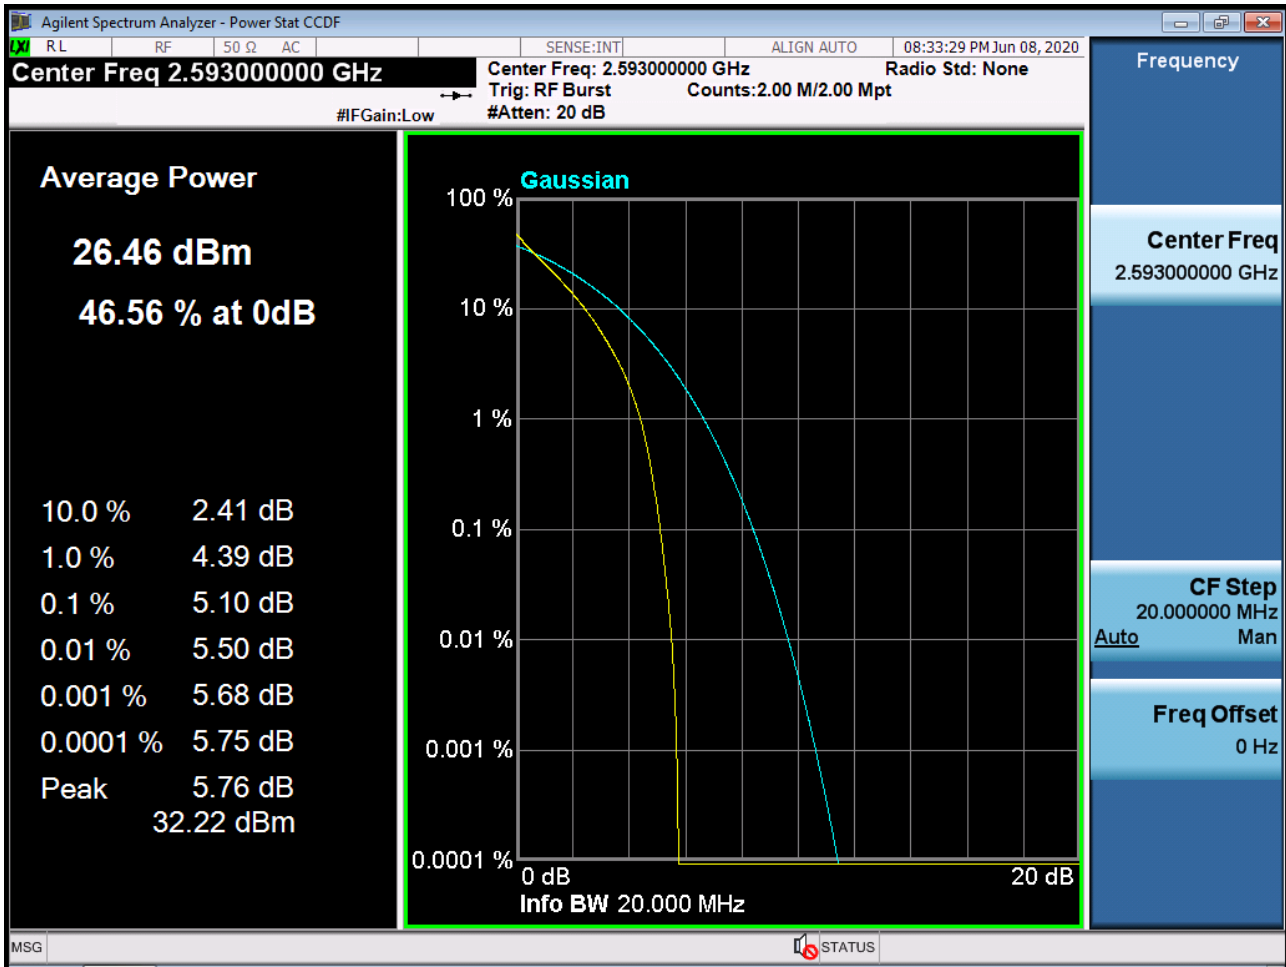


PAR Plot (20M BW\_Ch.40620\_16QAM\_RB100\_0) (POWER CLASS 2)

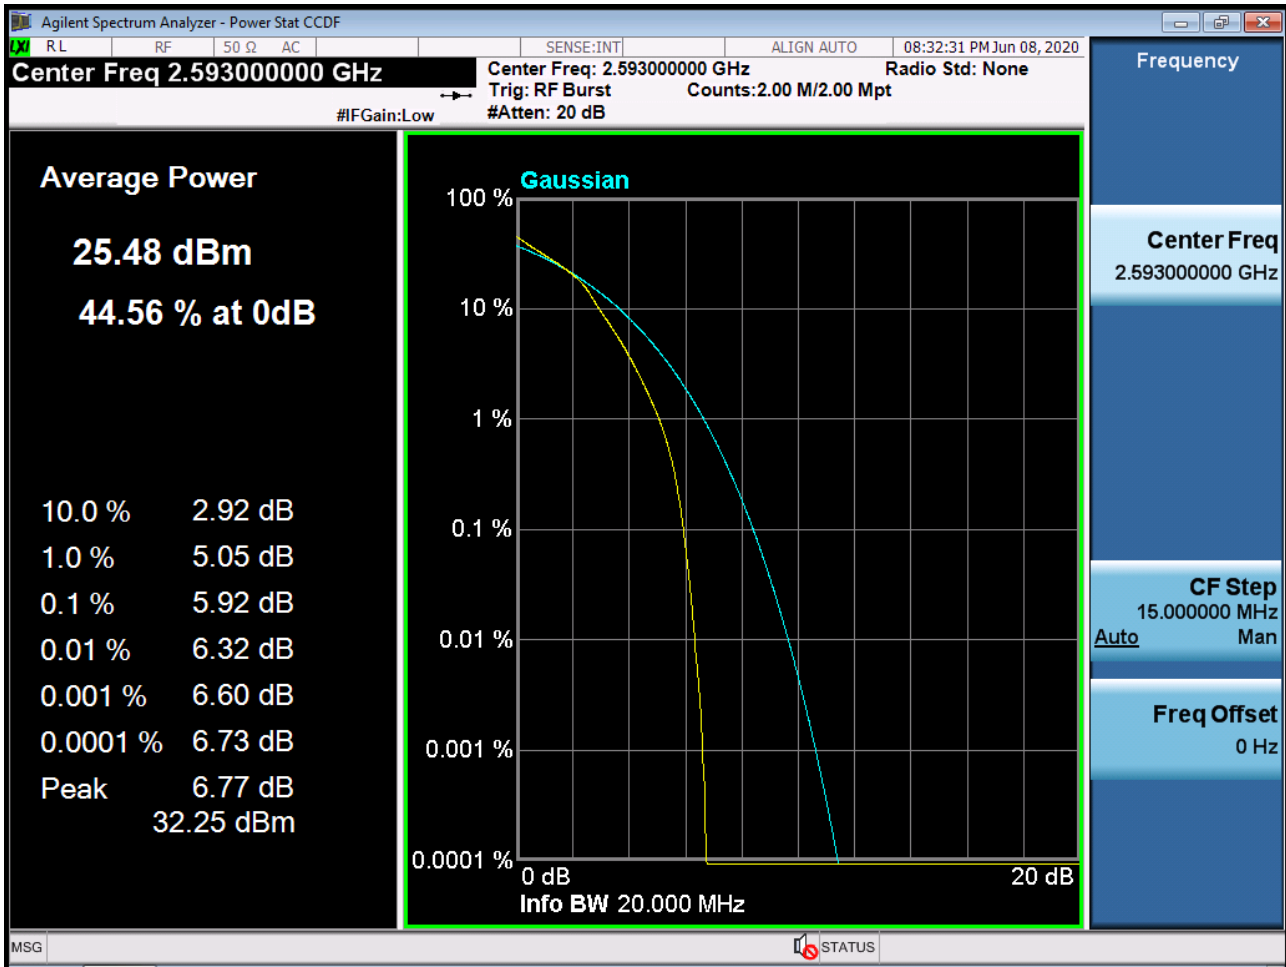


PAR Plot (20M BW\_Ch.40620\_64QAM\_RB100\_0) (POWER CLASS 2)

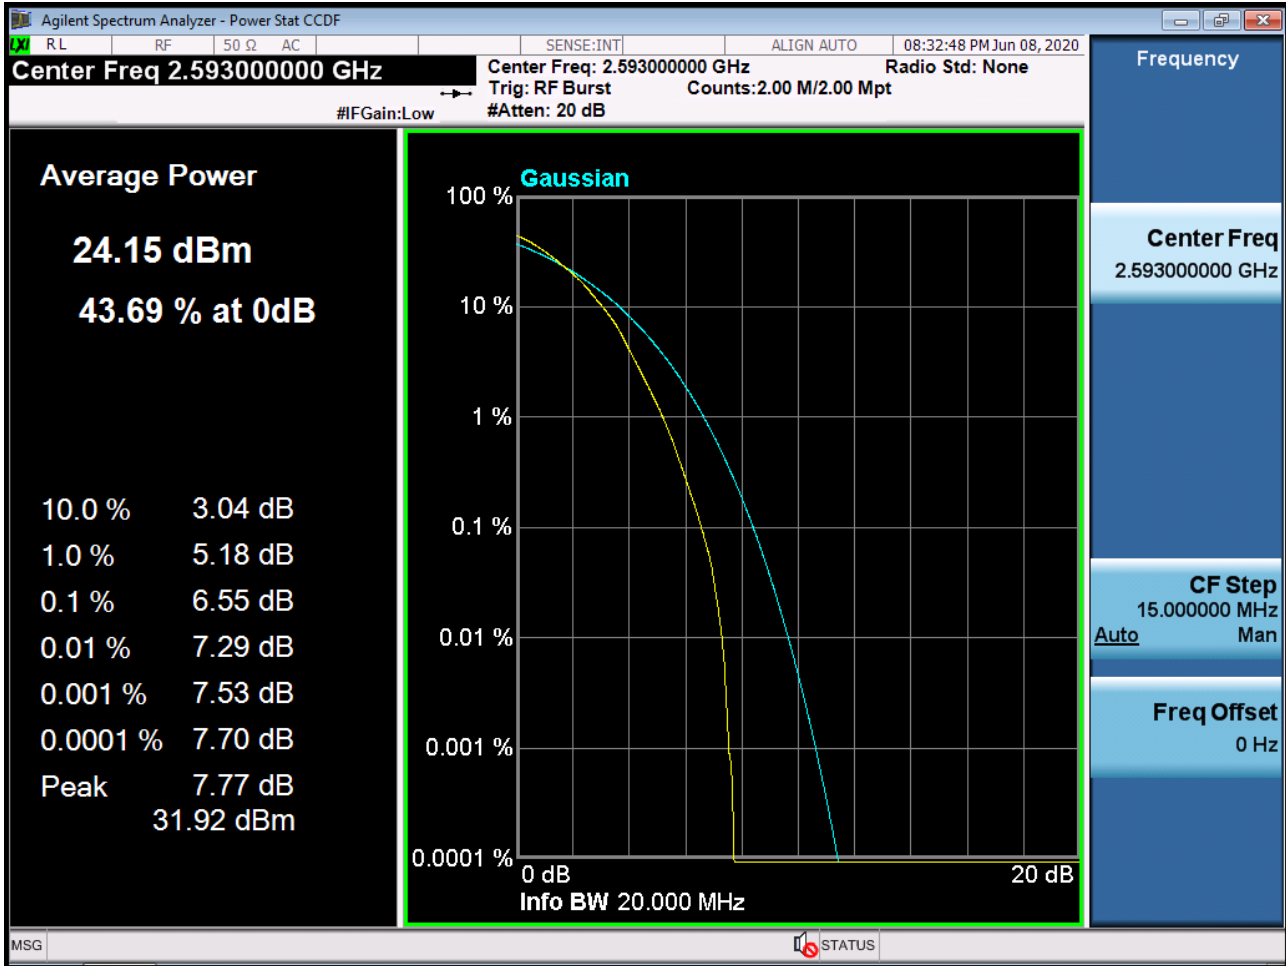


PAR Plot (20M BW\_Ch.40620\_256QAM\_RB100\_0) (POWER CLASS 2)

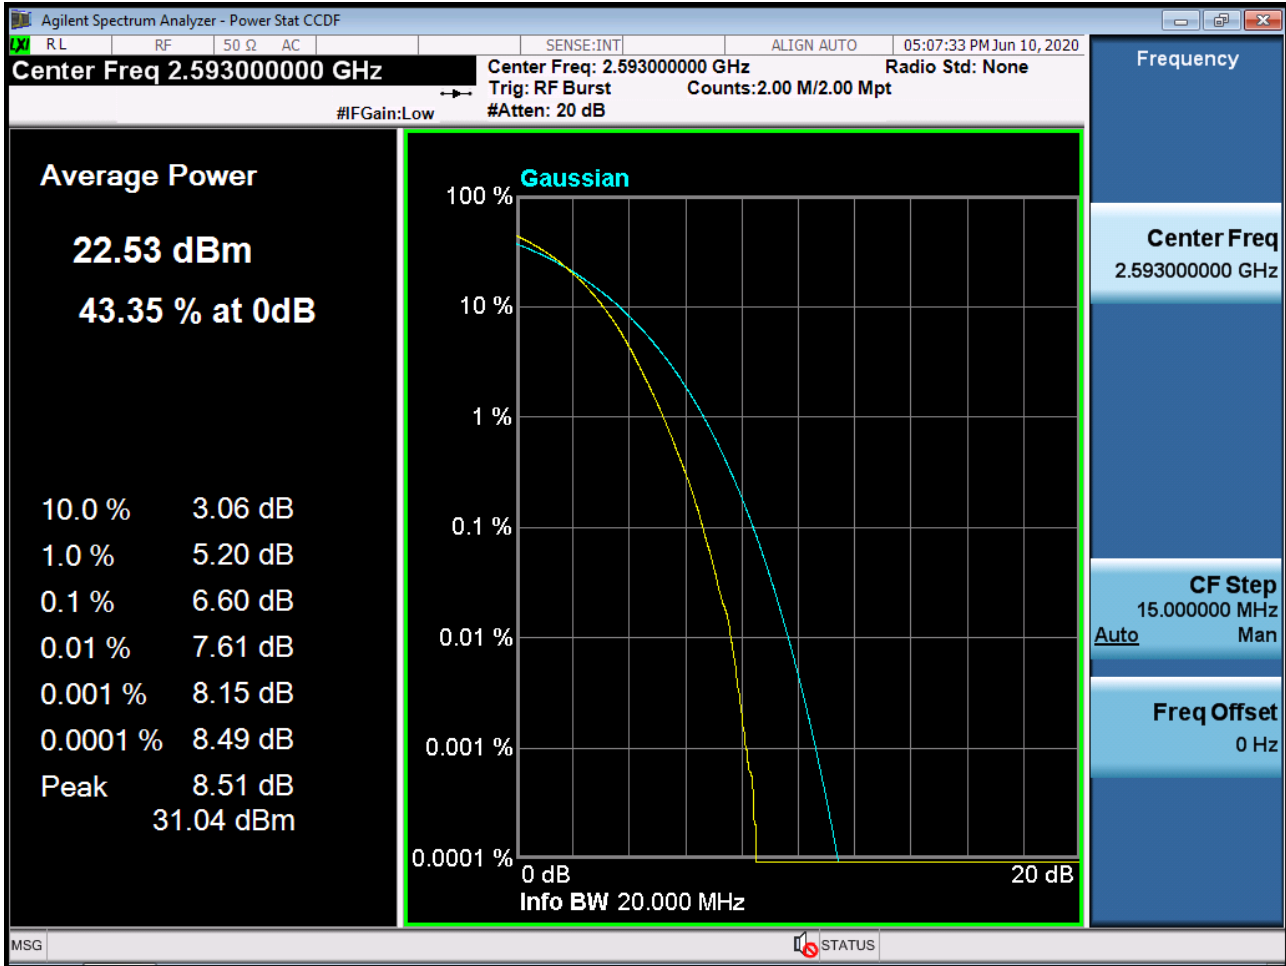

Low Channel Edge Plot (5 MHz Ch.39675 QPSK RB 1, Offset 0) (POWER CLASS 3)

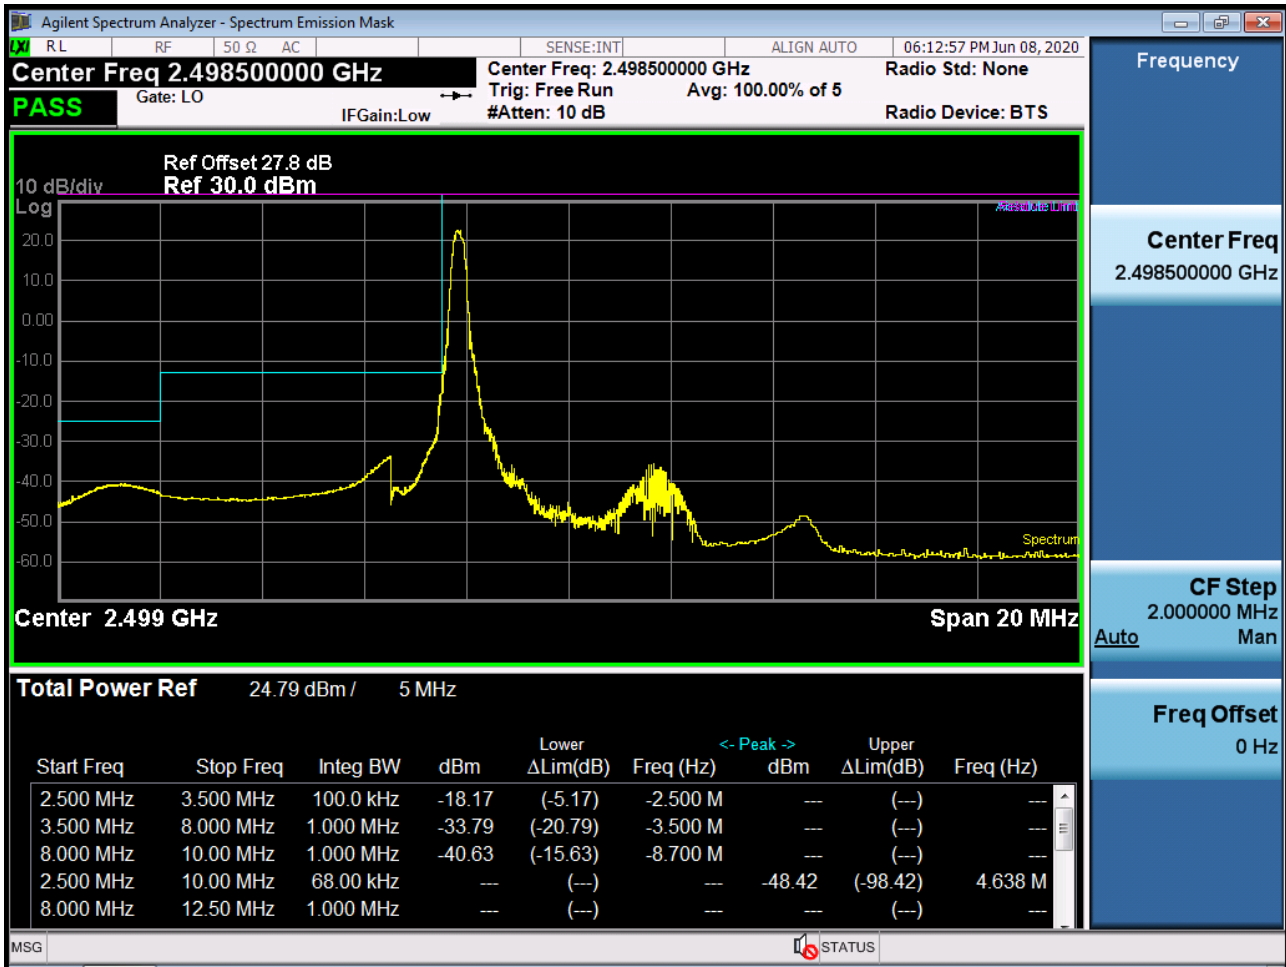


Low Channel Edge Plot (5 MHz Ch.39675 QPSK RB 25, Offset 0) (POWER CLASS 3)

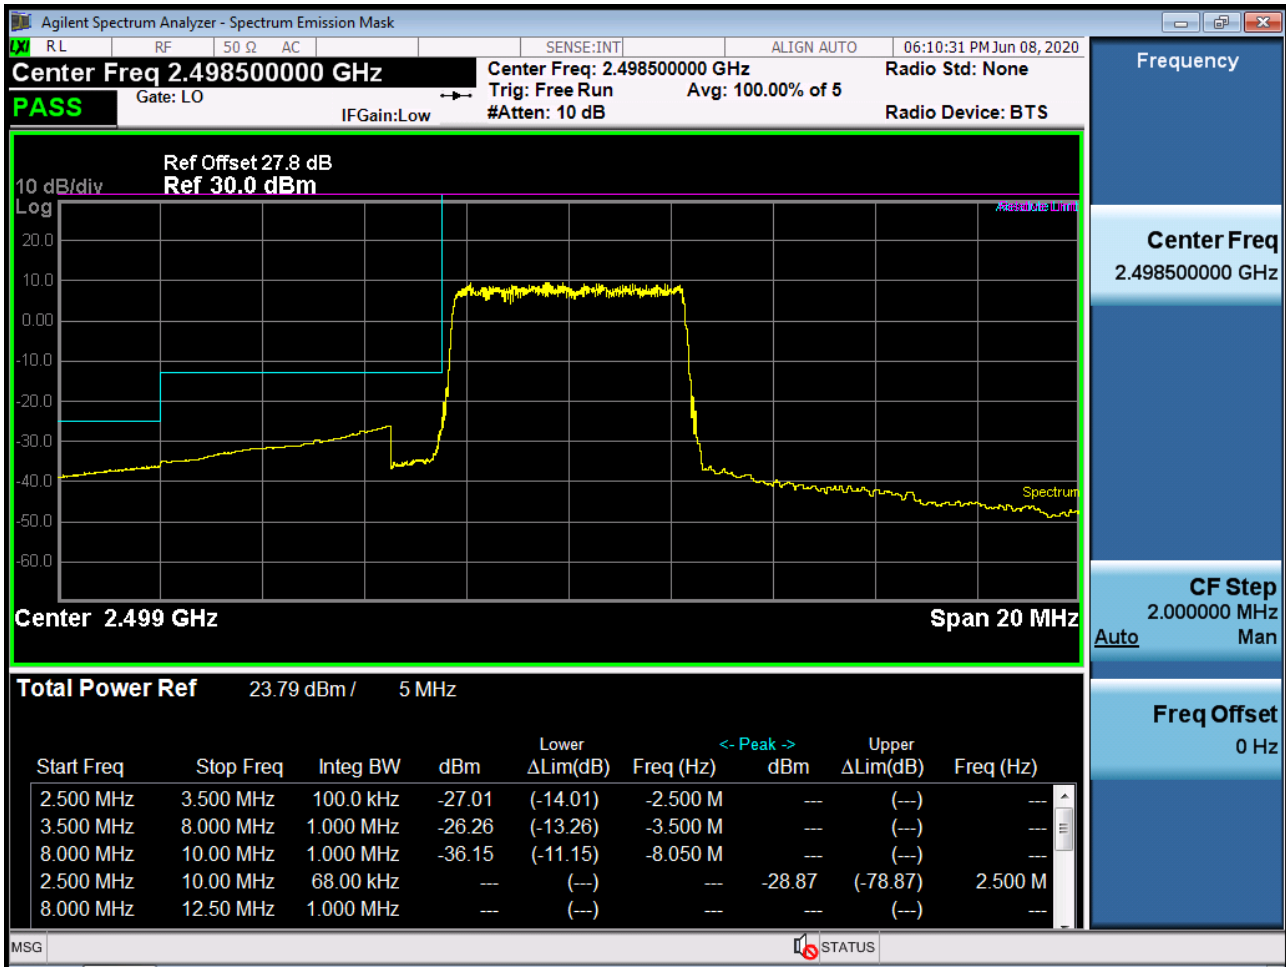





Low Channel Edge Plot (5 MHz Ch.39675 QPSK\_RB1\_Offset 0) (POWER CLASS 3)

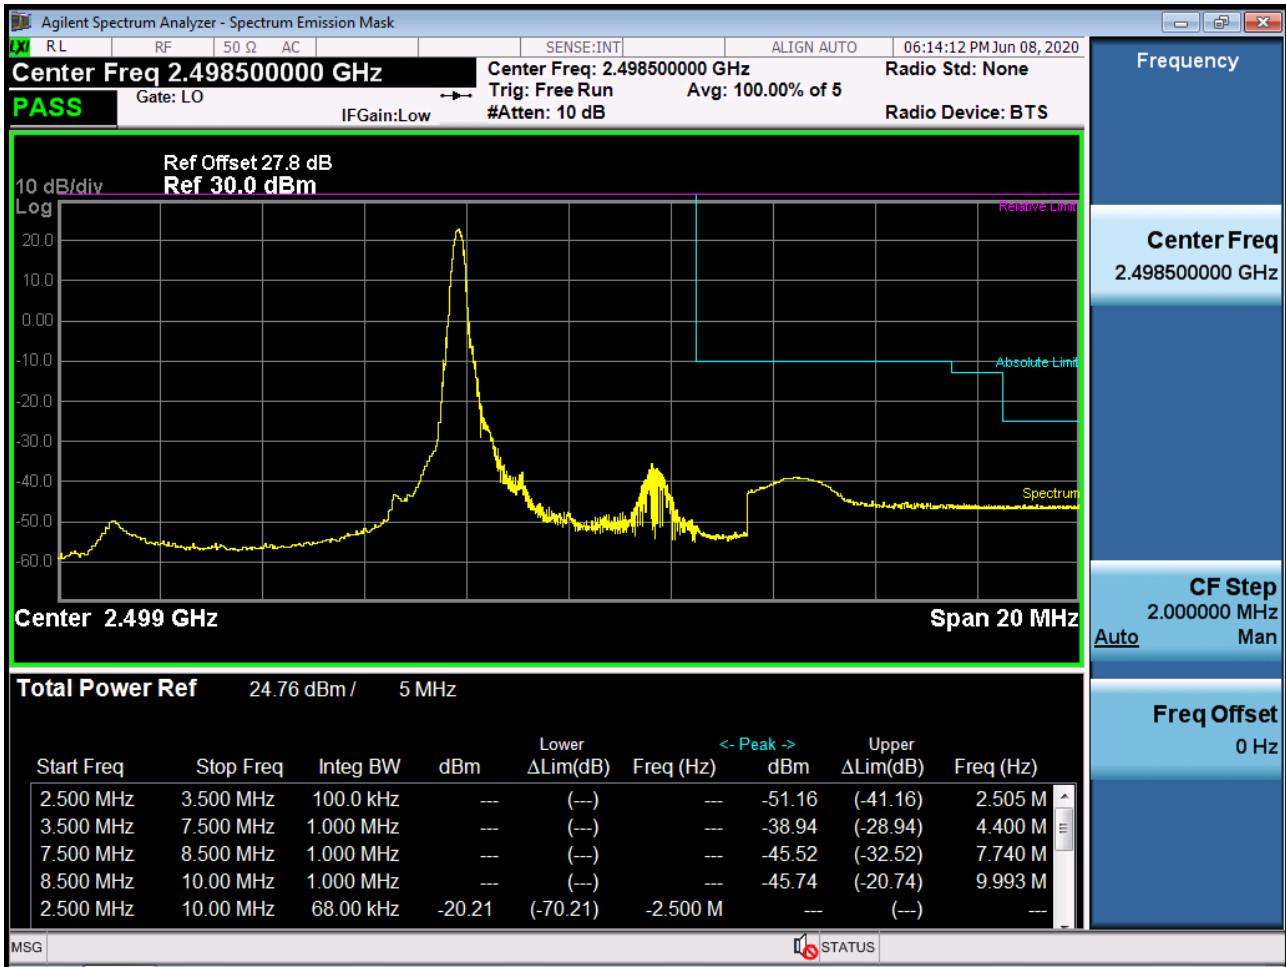


Low Channel Edge Plot (5 MHz Ch.39675 QPSK\_RB25\_Offset 0) (POWER CLASS 3)

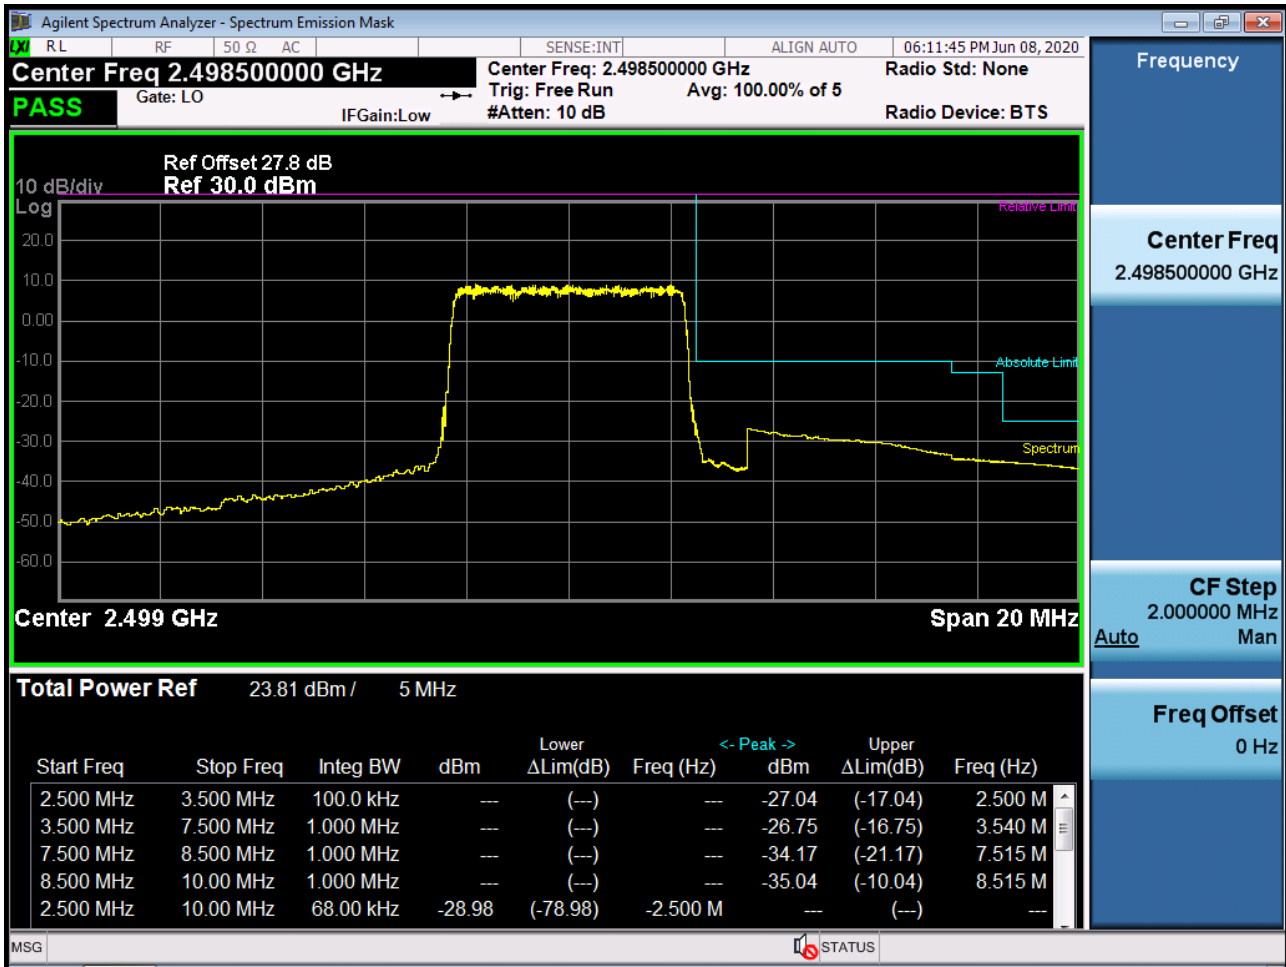


Mid Channel Edge Plot (5 MHz Ch.40620 QPSK RB 25) (POWER CLASS 3)

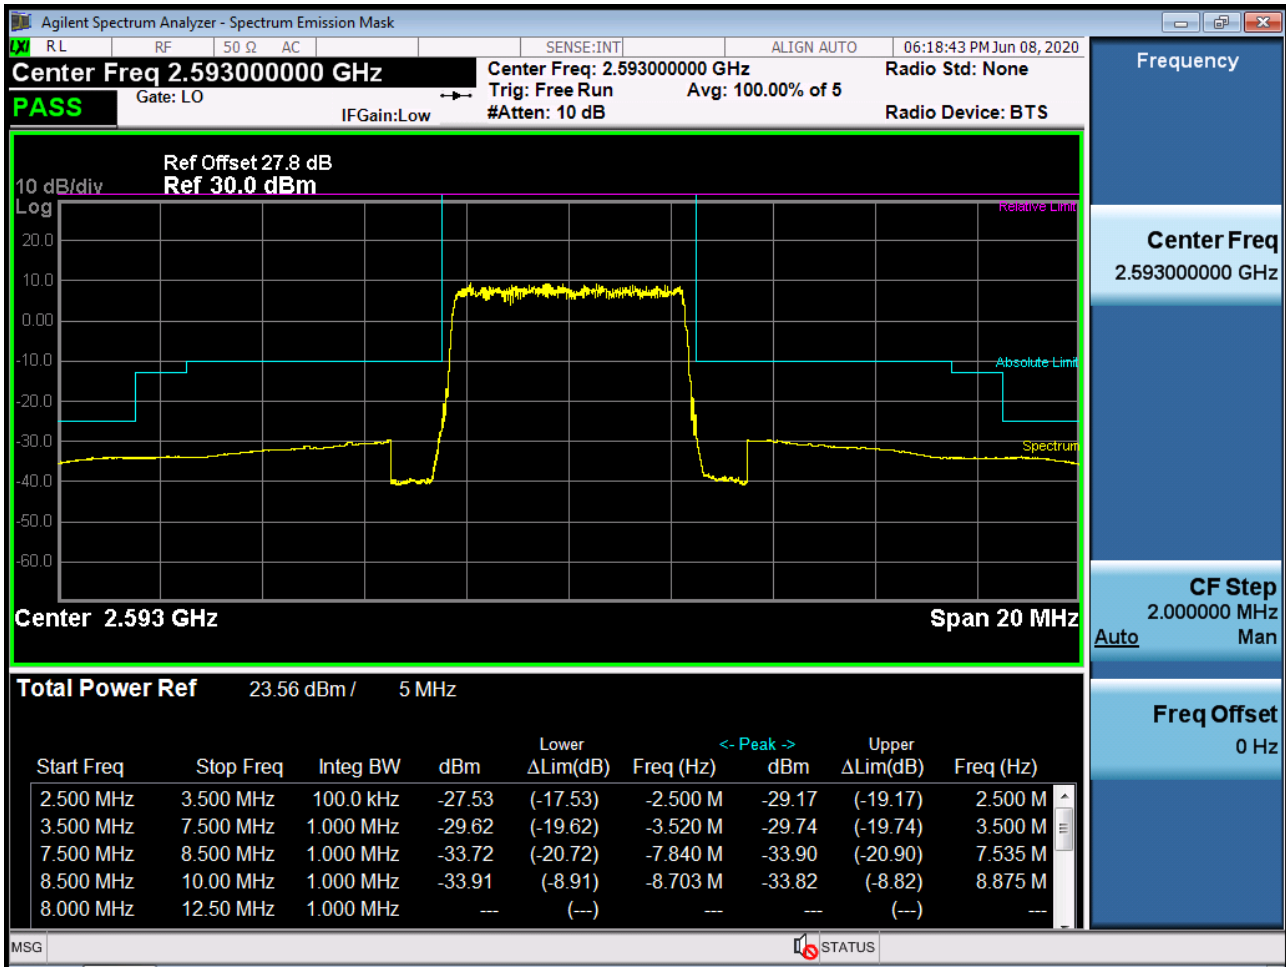


High Channel Edge Plot (5 MHz Ch.41565 QPSK RB 1, Offset 24) (POWER CLASS 3)

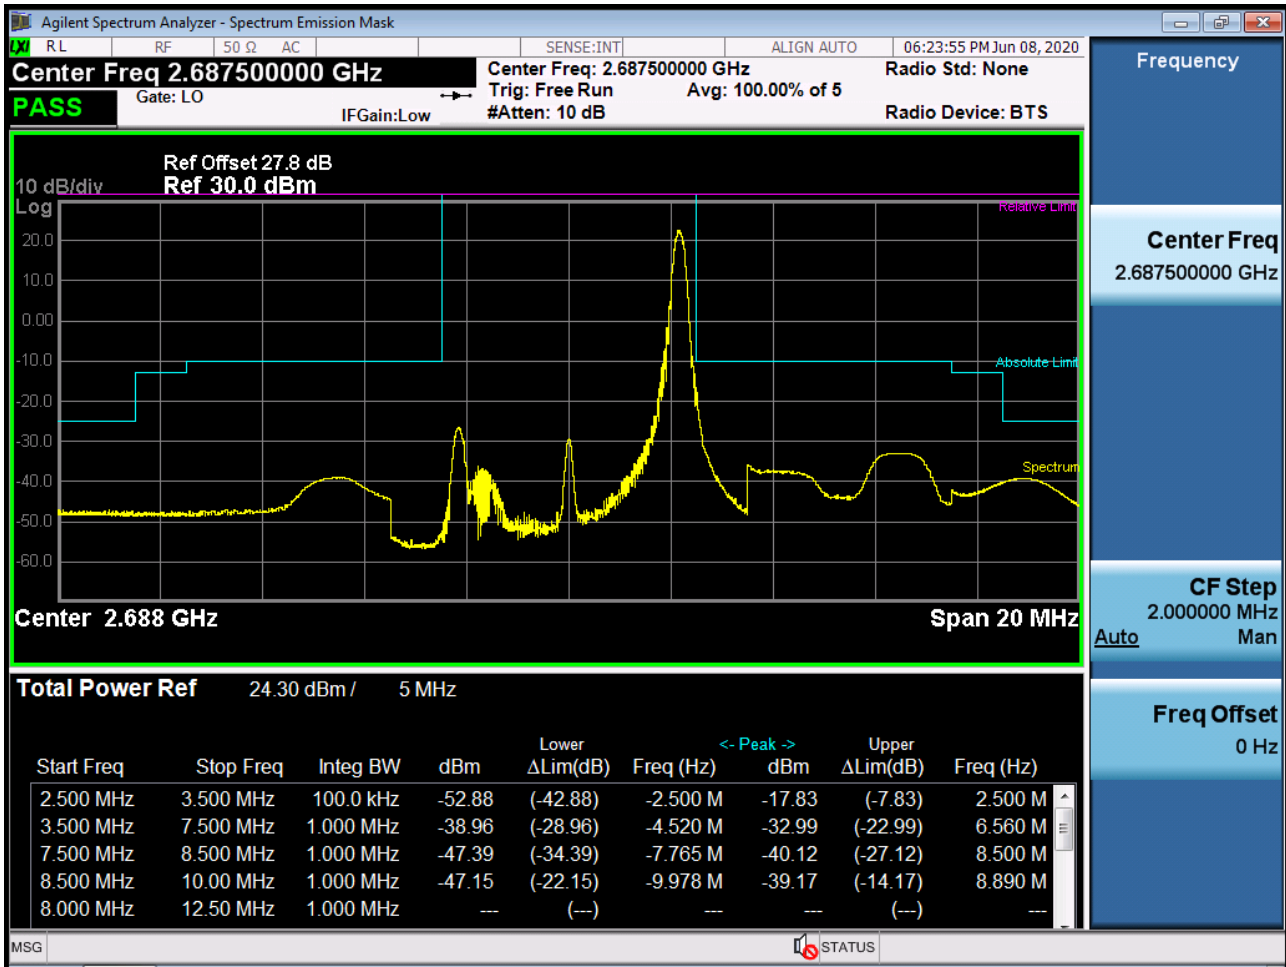


High Channel Edge Plot (5 MHz Ch.41565 QPSK\_RB25\_Offset 0) (POWER CLASS 3)

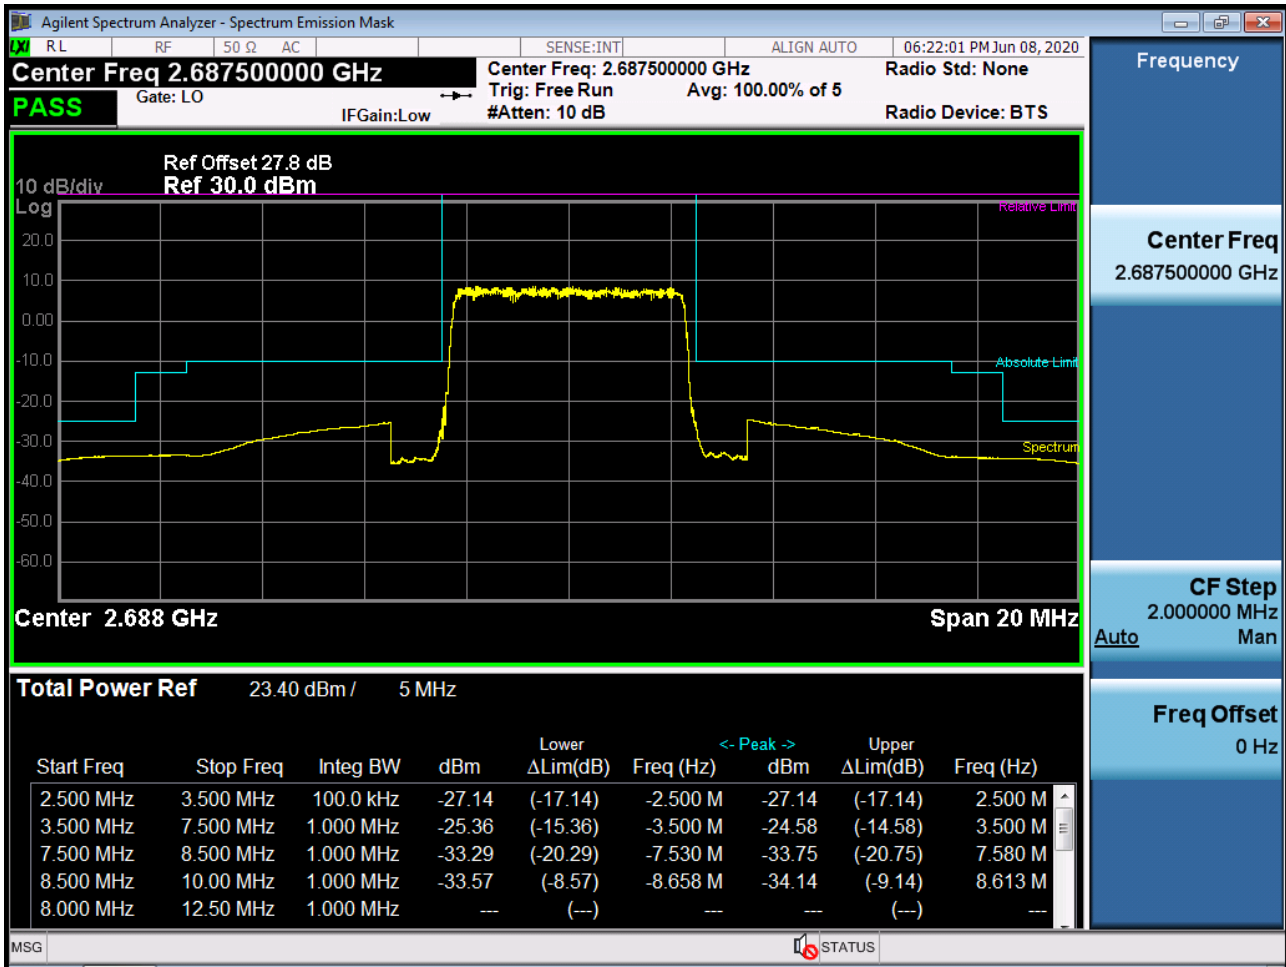


Low Channel Edge Plot (10 MHz Ch.39700 QPSK RB 1, Offset 0) (POWER CLASS 3)

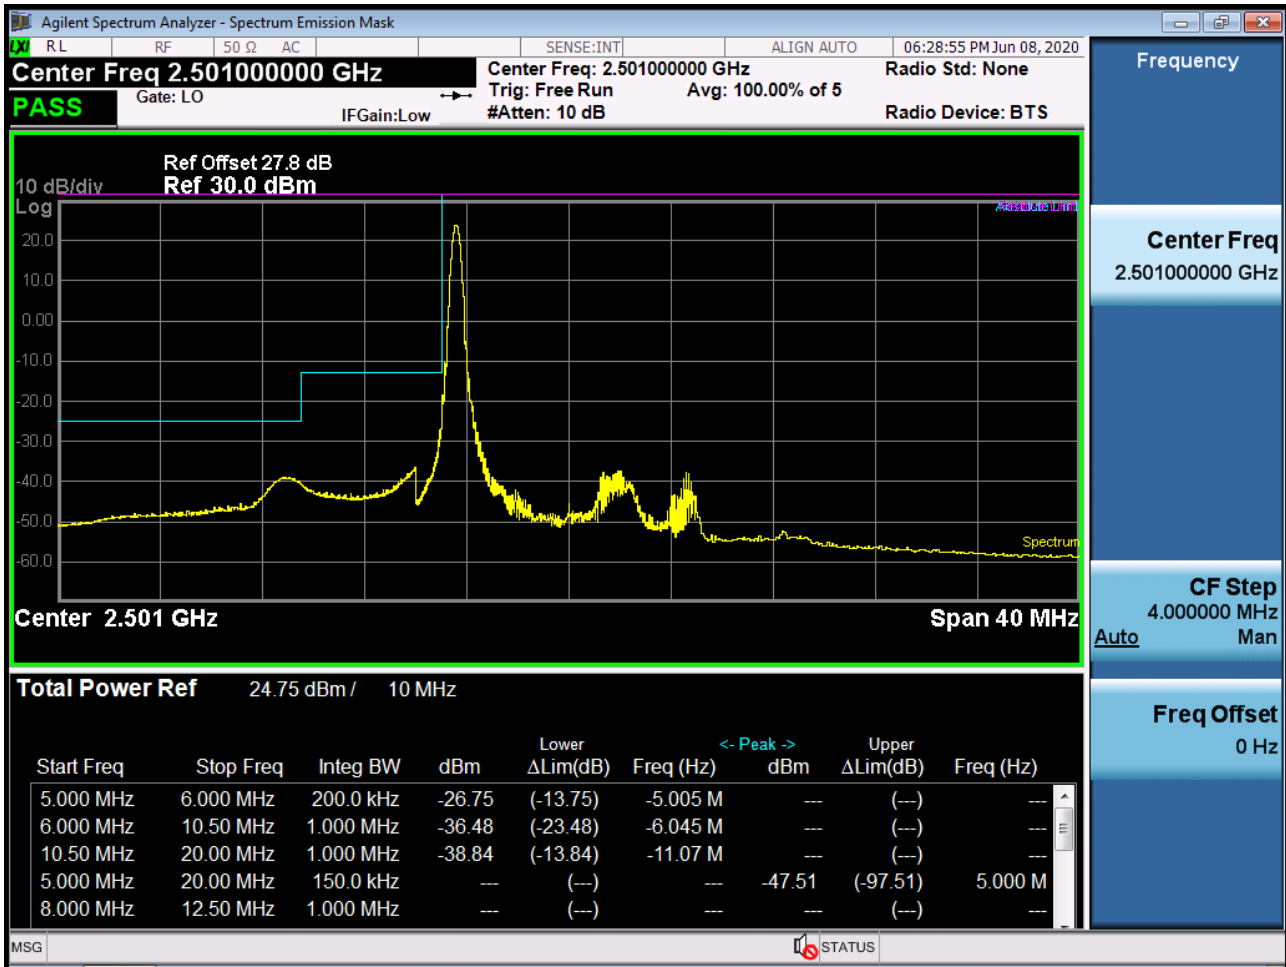

Low Channel Edge Plot (10 MHz Ch.39700 QPSK RB 50, Offset 0) (POWER CLASS 3)

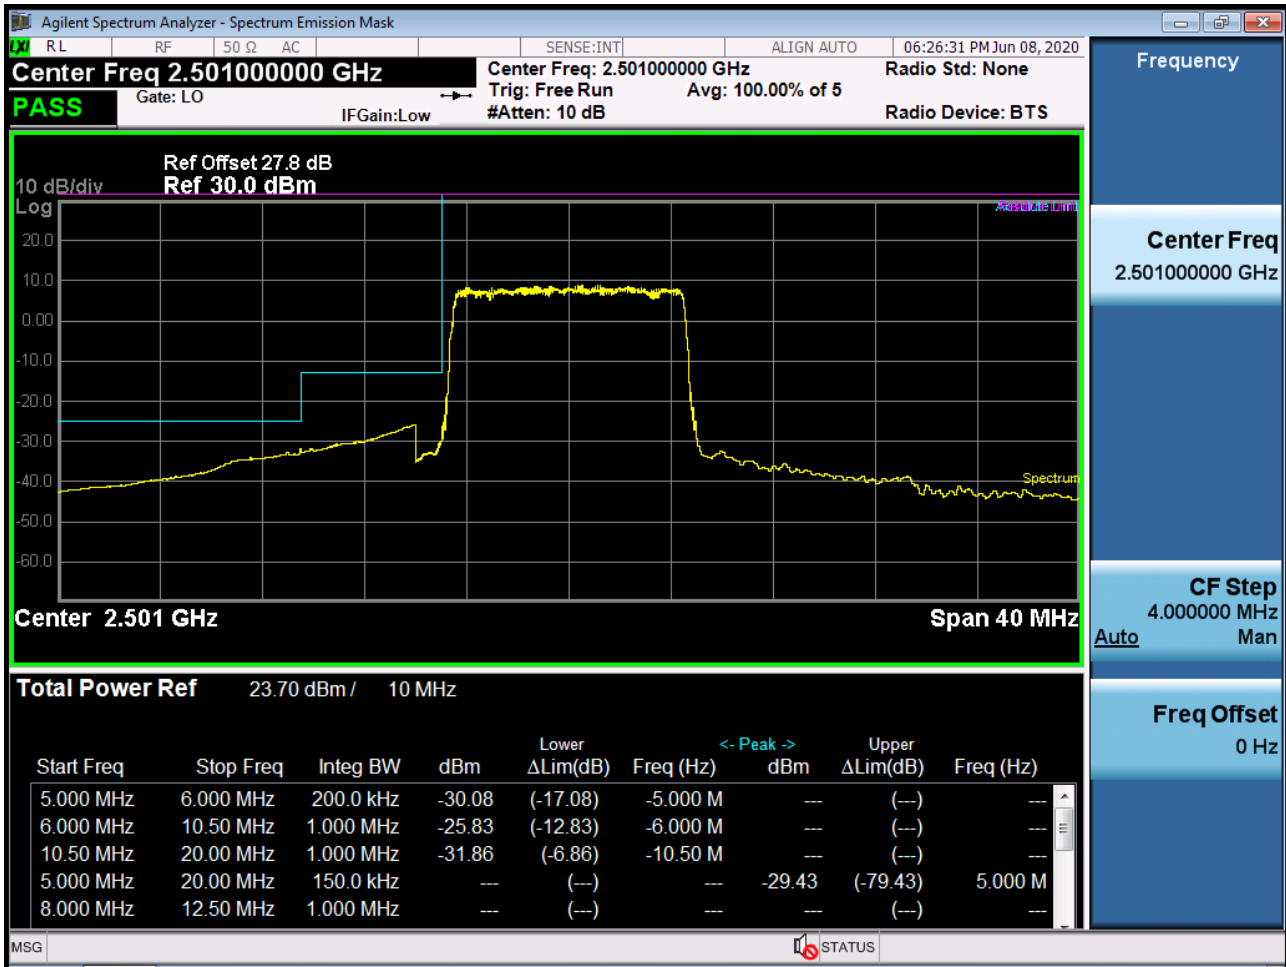


Low Channel Edge Plot (10 MHz Ch.39700 QPSK\_RB1\_Offset 0) (POWER CLASS 3)

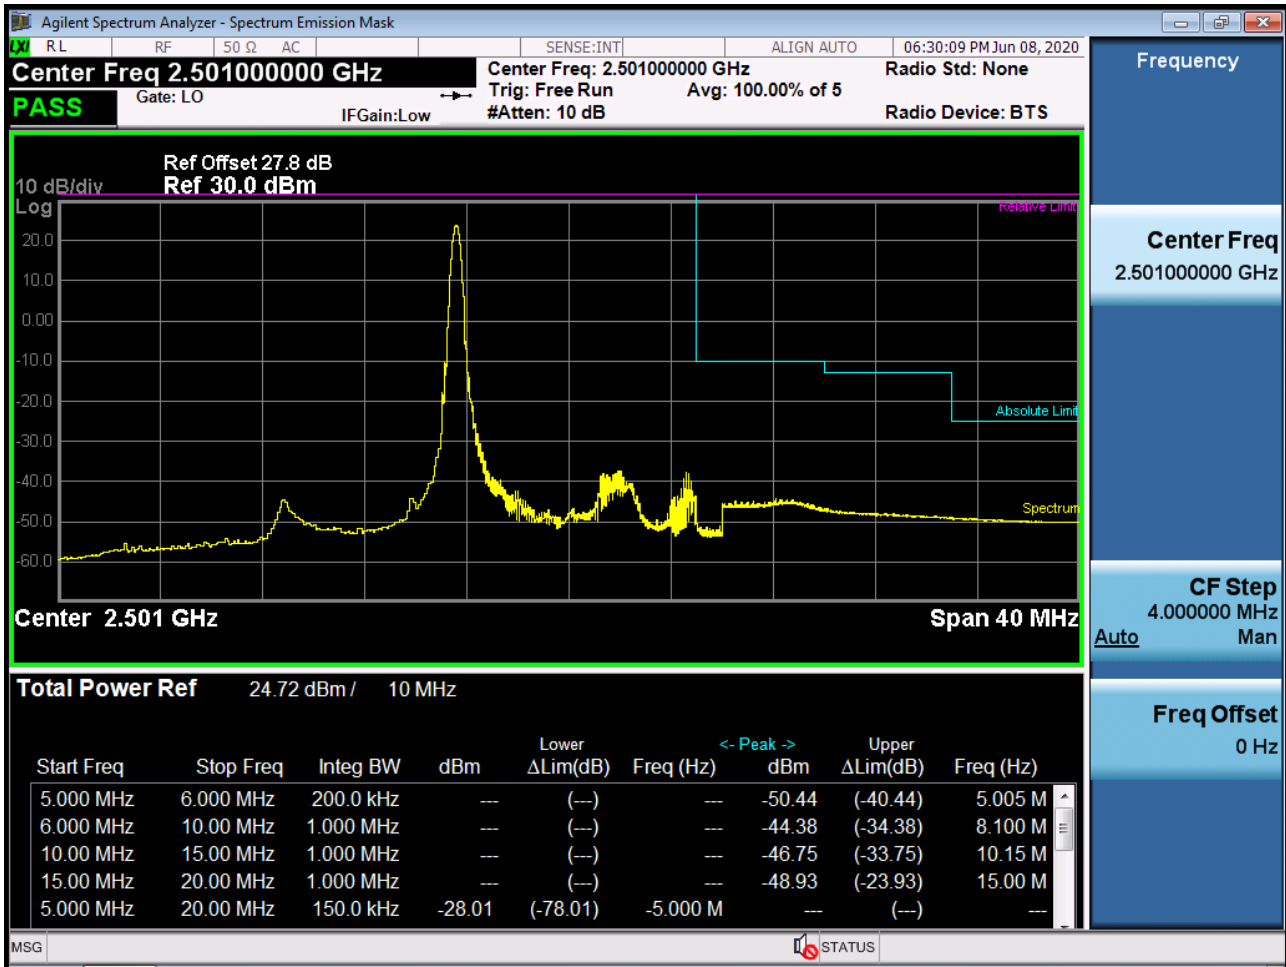





Low Channel Edge Plot (10 MHz Ch.39700 QPSK\_RB50\_Offset 0) (POWER CLASS 3)

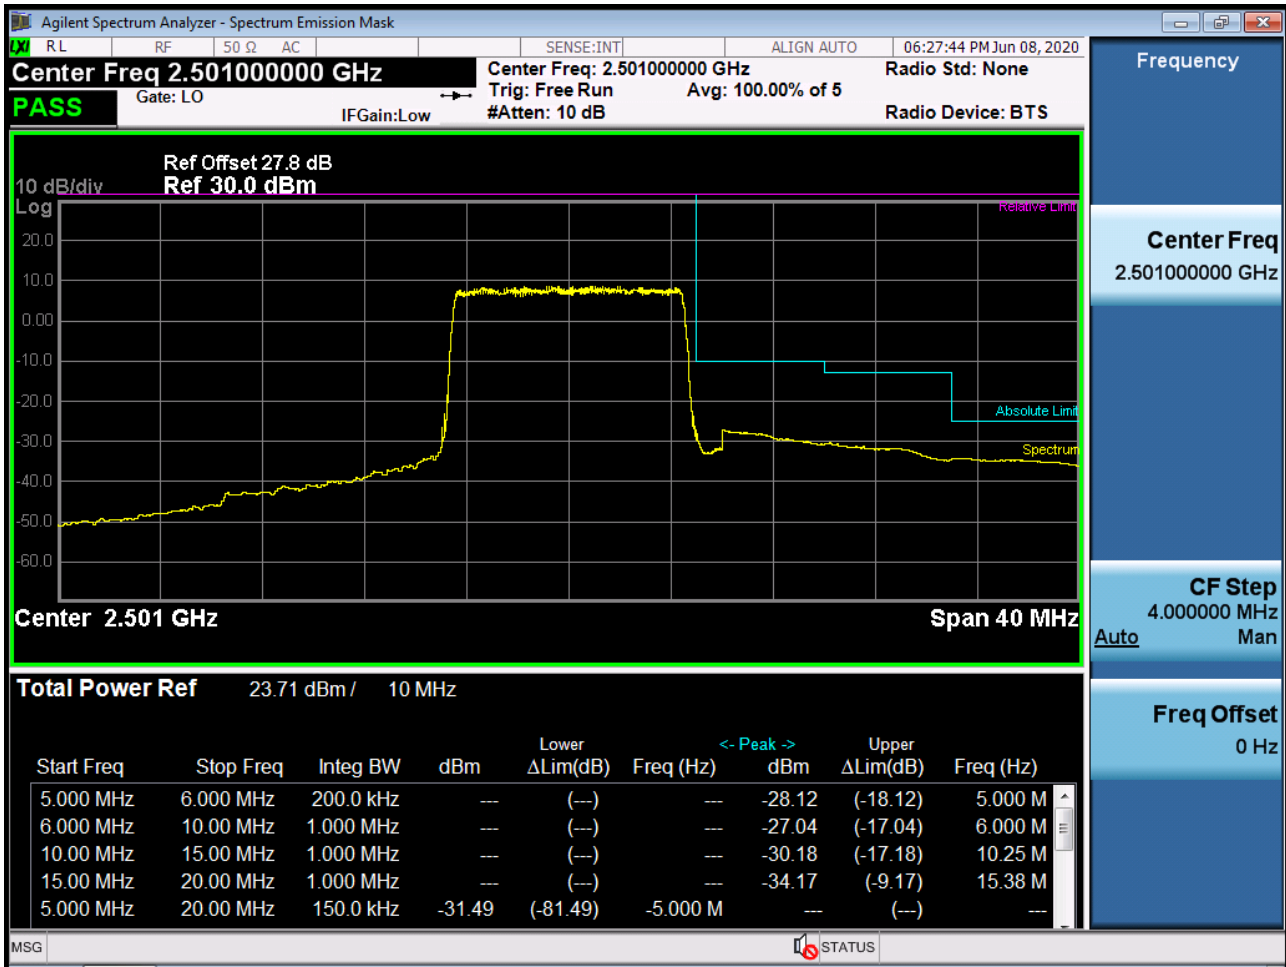


Mid Channel Edge Plot (10 MHz Ch.40620 QPSK RB 50) (POWER CLASS 3)

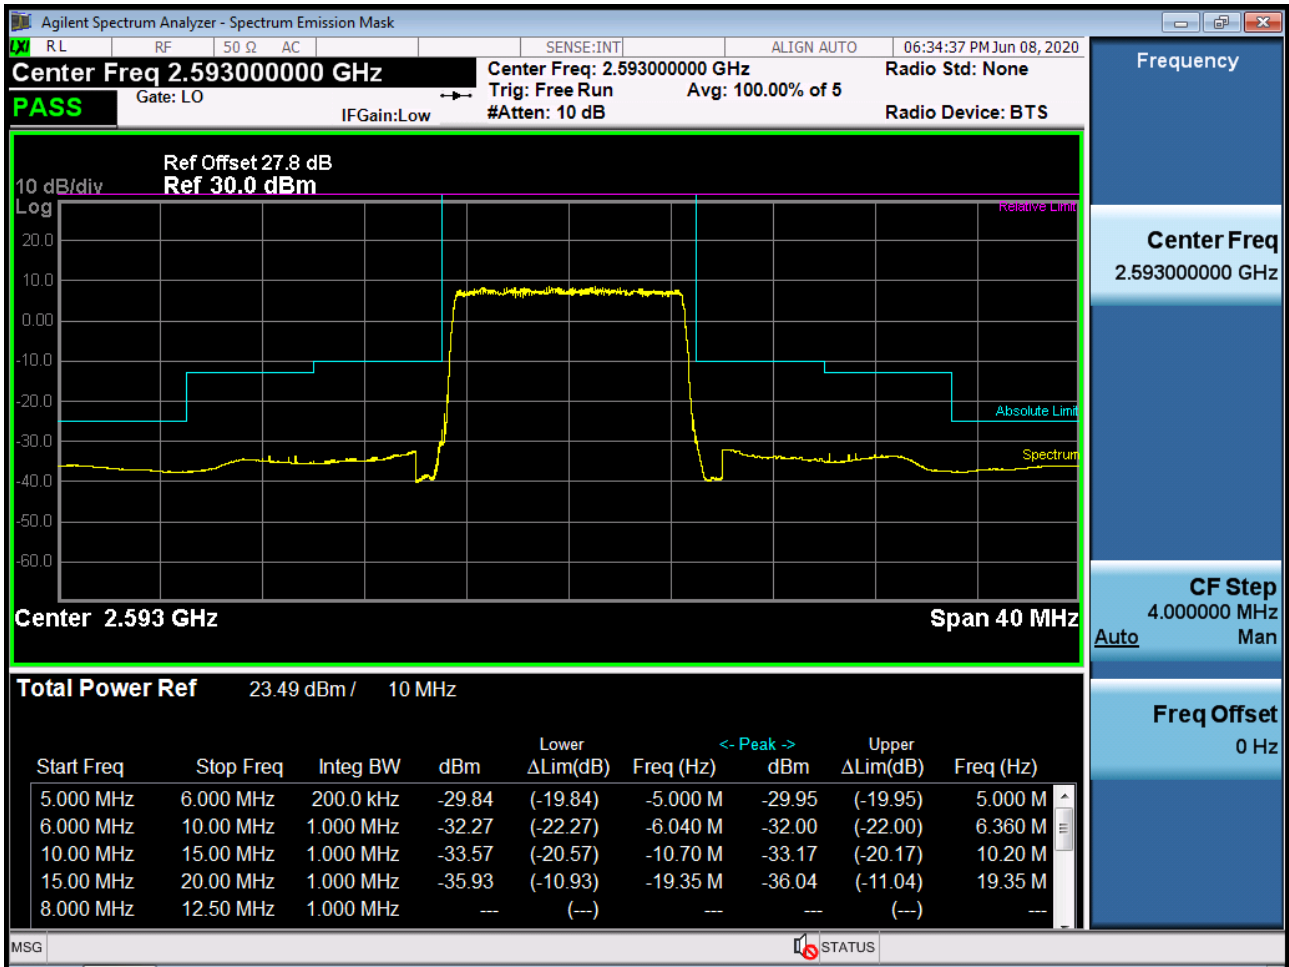


High Channel Edge Plot (10 MHz Ch.41540 QPSK RB 1, Offset 49) (POWER CLASS 3)

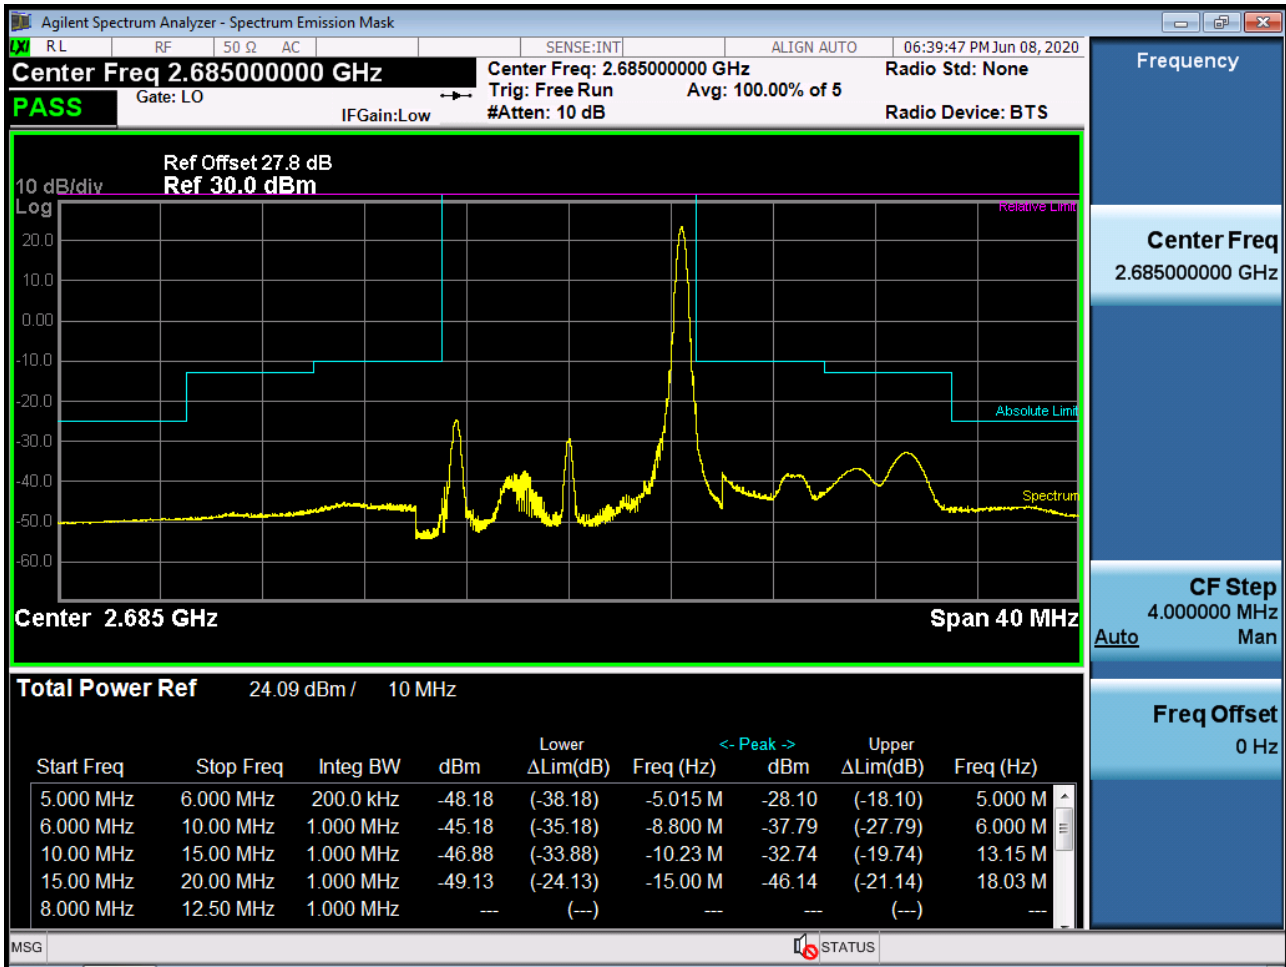


High Channel Edge Plot (10 MHz Ch.41540 QPSK\_RB50\_Offset 0) (POWER CLASS 3)

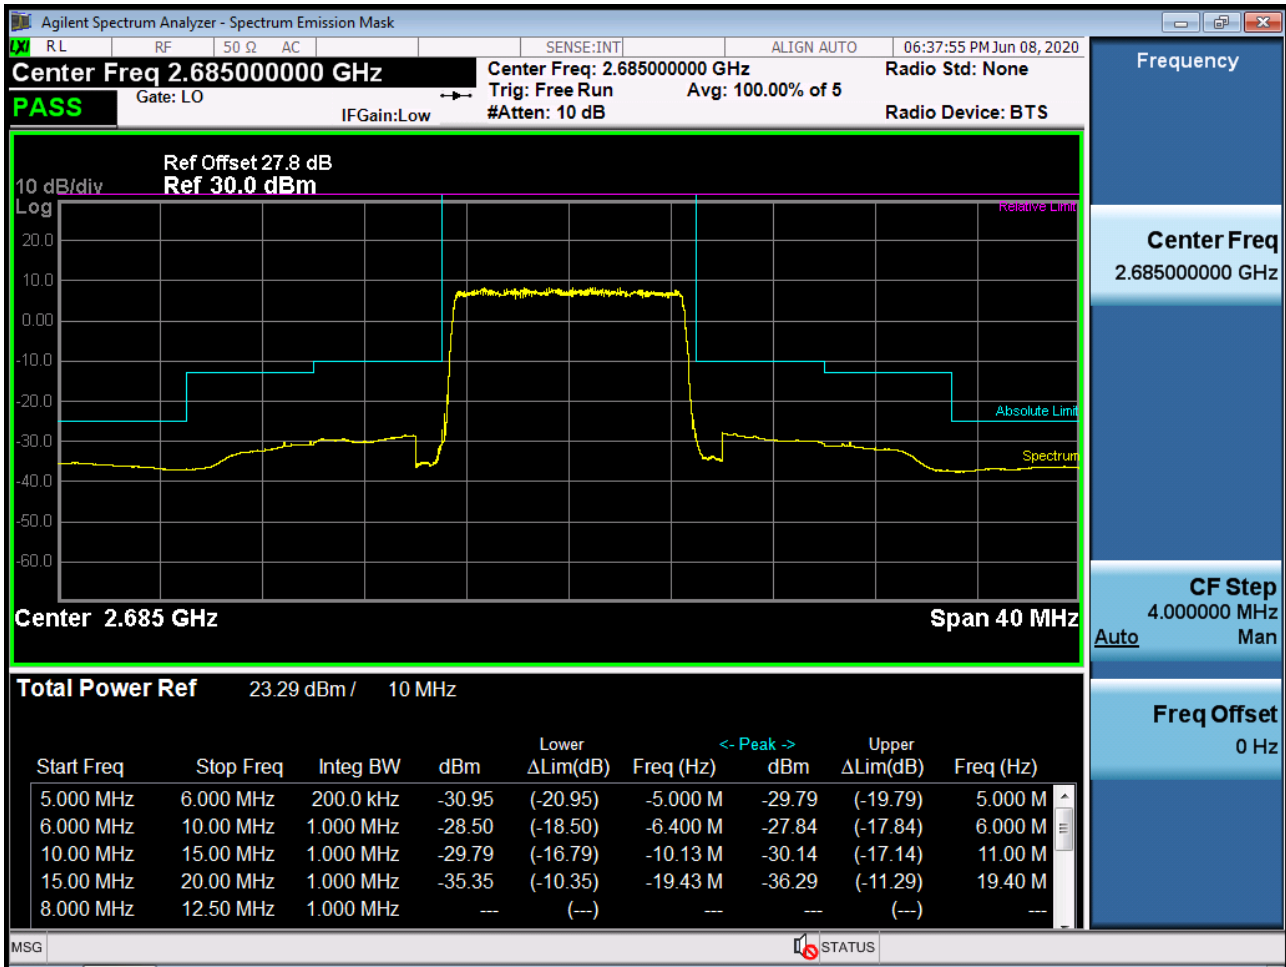


Low Channel Edge Plot (15 MHz Ch.39725 QPSK RB 1, Offset 0) (POWER CLASS 3)

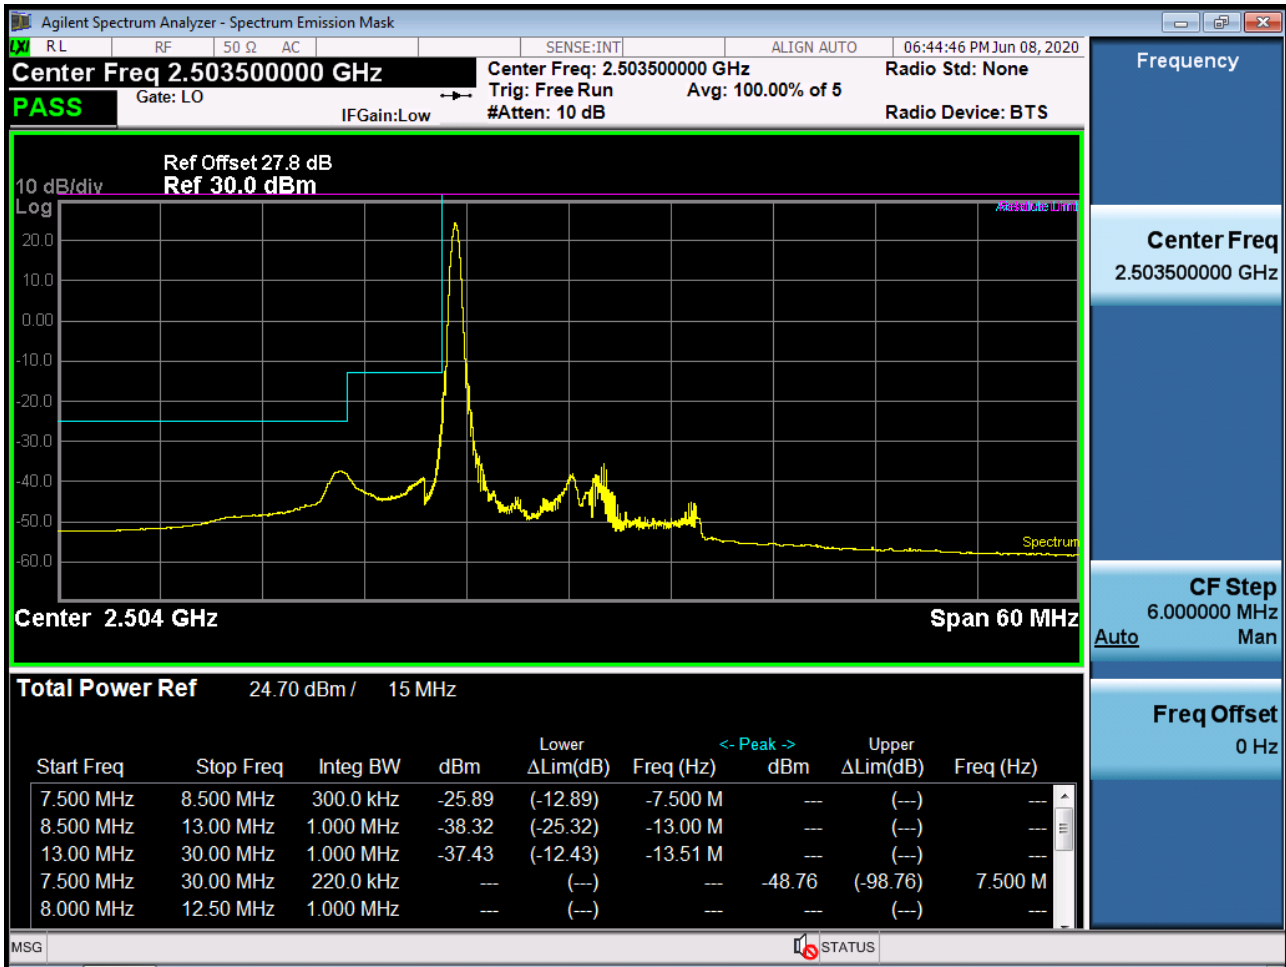


Low Channel Edge Plot (15 MHz Ch.39725 QPSK RB 75, Offset 0) (POWER CLASS 3)

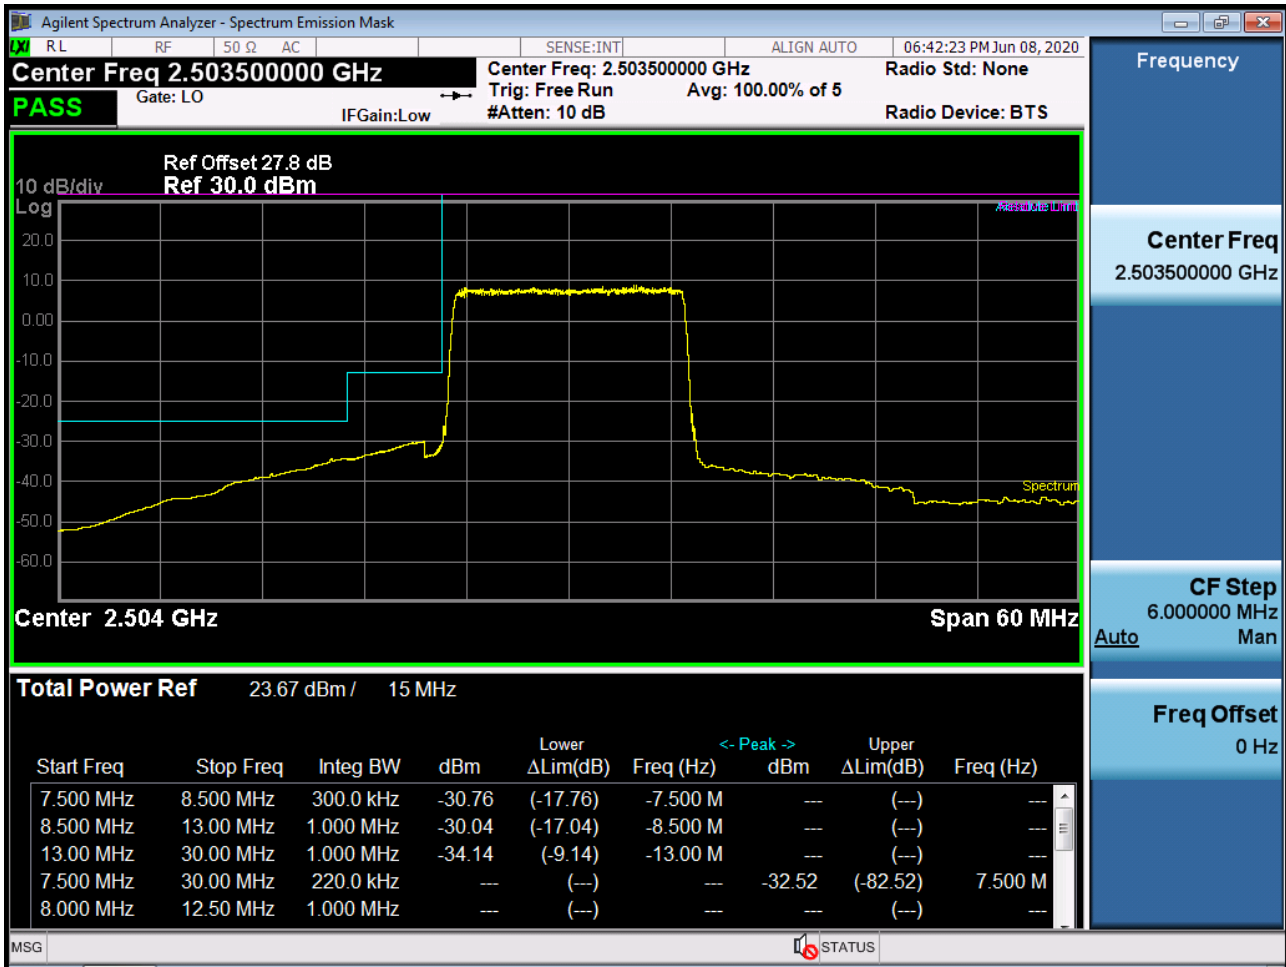

Low Channel Edge Plot (15 MHz Ch.39725 QPSK\_RB1\_Offset 0) (POWER CLASS 3)

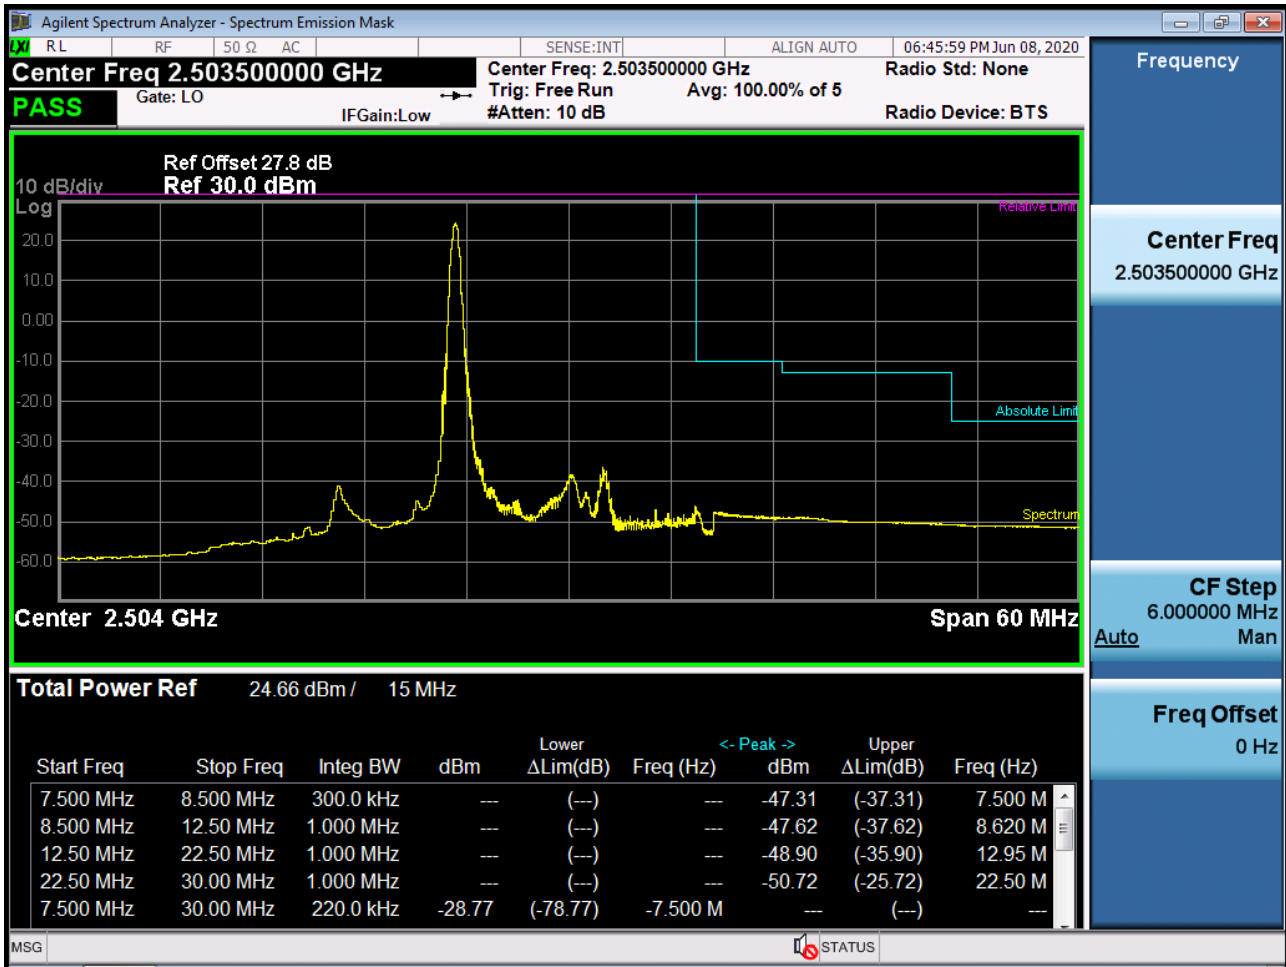


Low Channel Edge Plot (15 MHz Ch.39725 QPSK\_RB75\_Offset 0) (POWER CLASS 3)

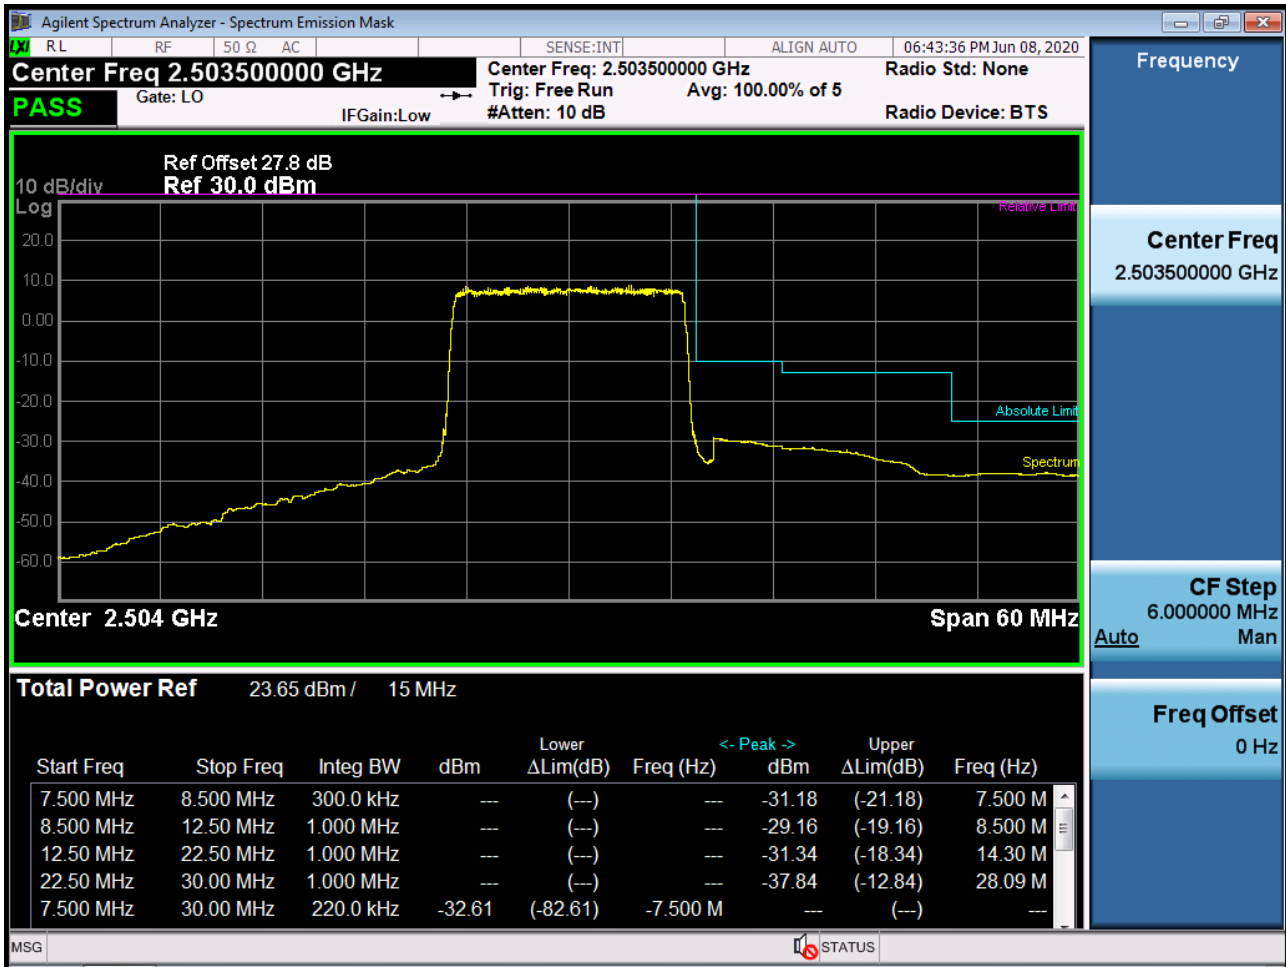





Mid Channel Edge Plot (15 MHz Ch.40620 QPSK RB 75\_Offset 0) (POWER CLASS 3)

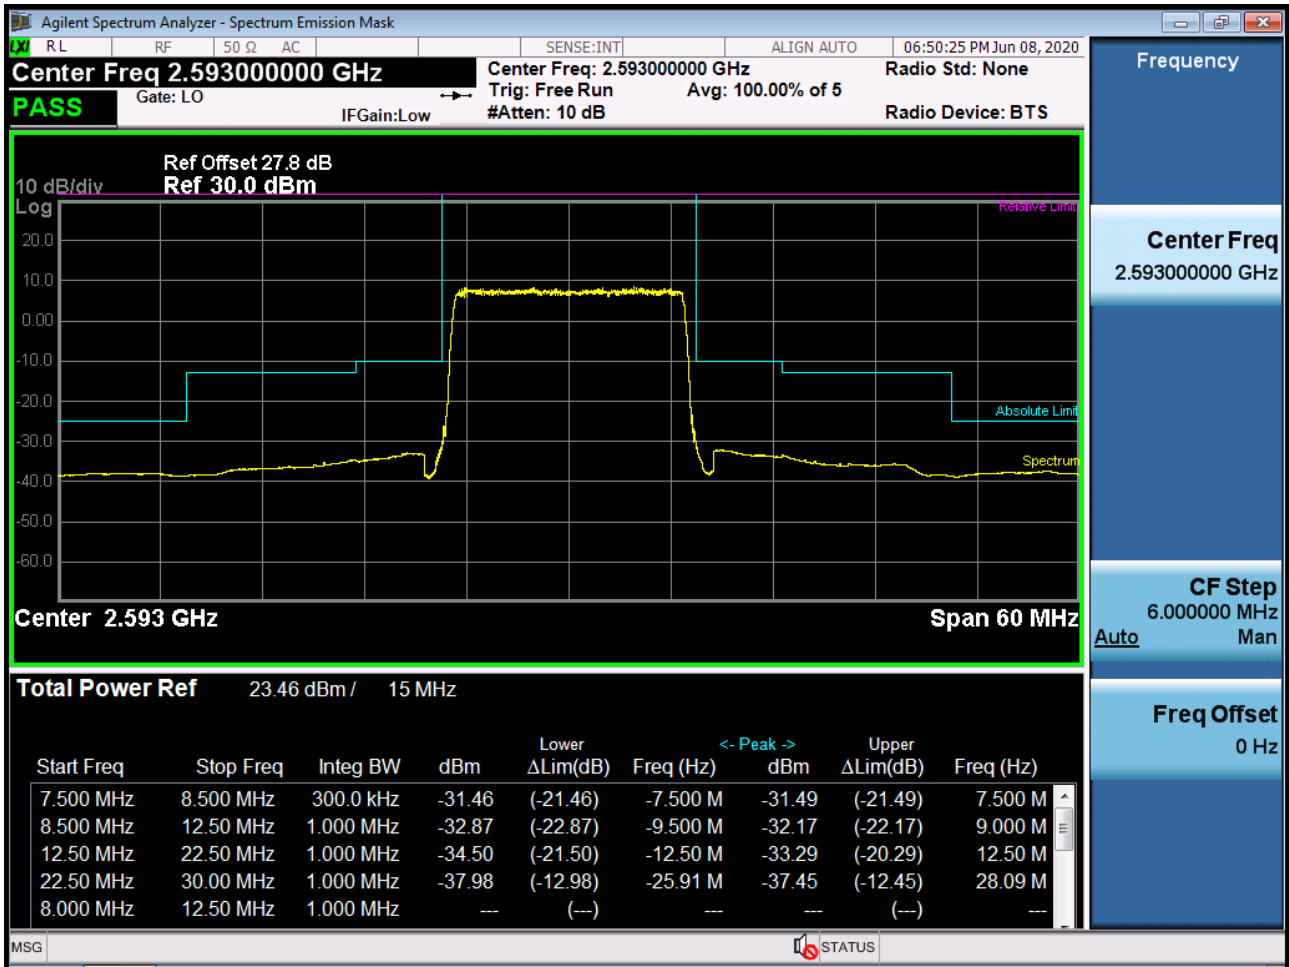


High Channel Edge Plot (15 MHz Ch.41515 QPSK RB 1, Offset 74) (POWER CLASS 3)

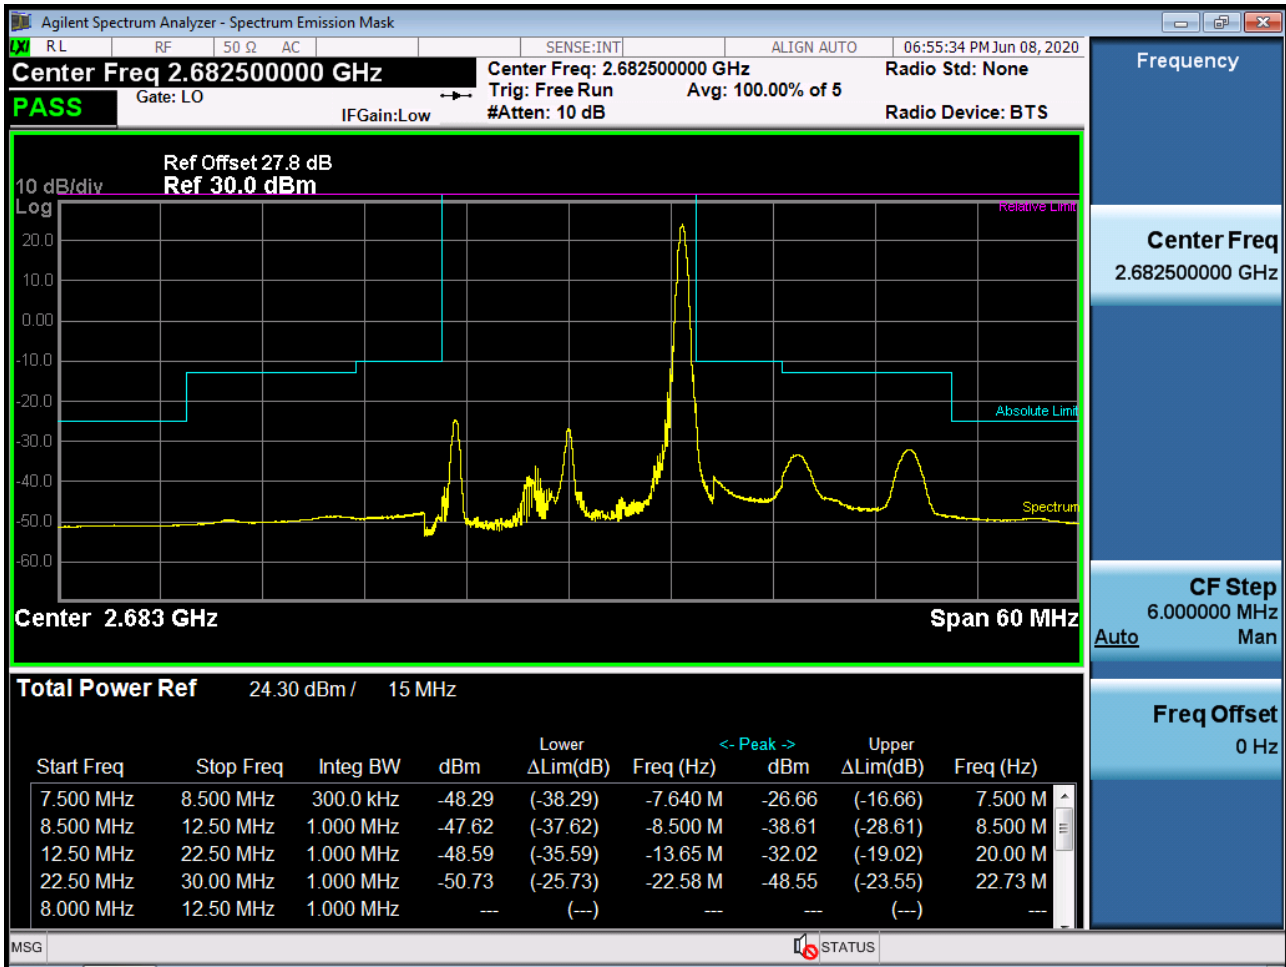

High Channel Edge Plot (15 MHz Ch.41515 QPSK\_RB75\_Offset 0) (POWER CLASS 3)

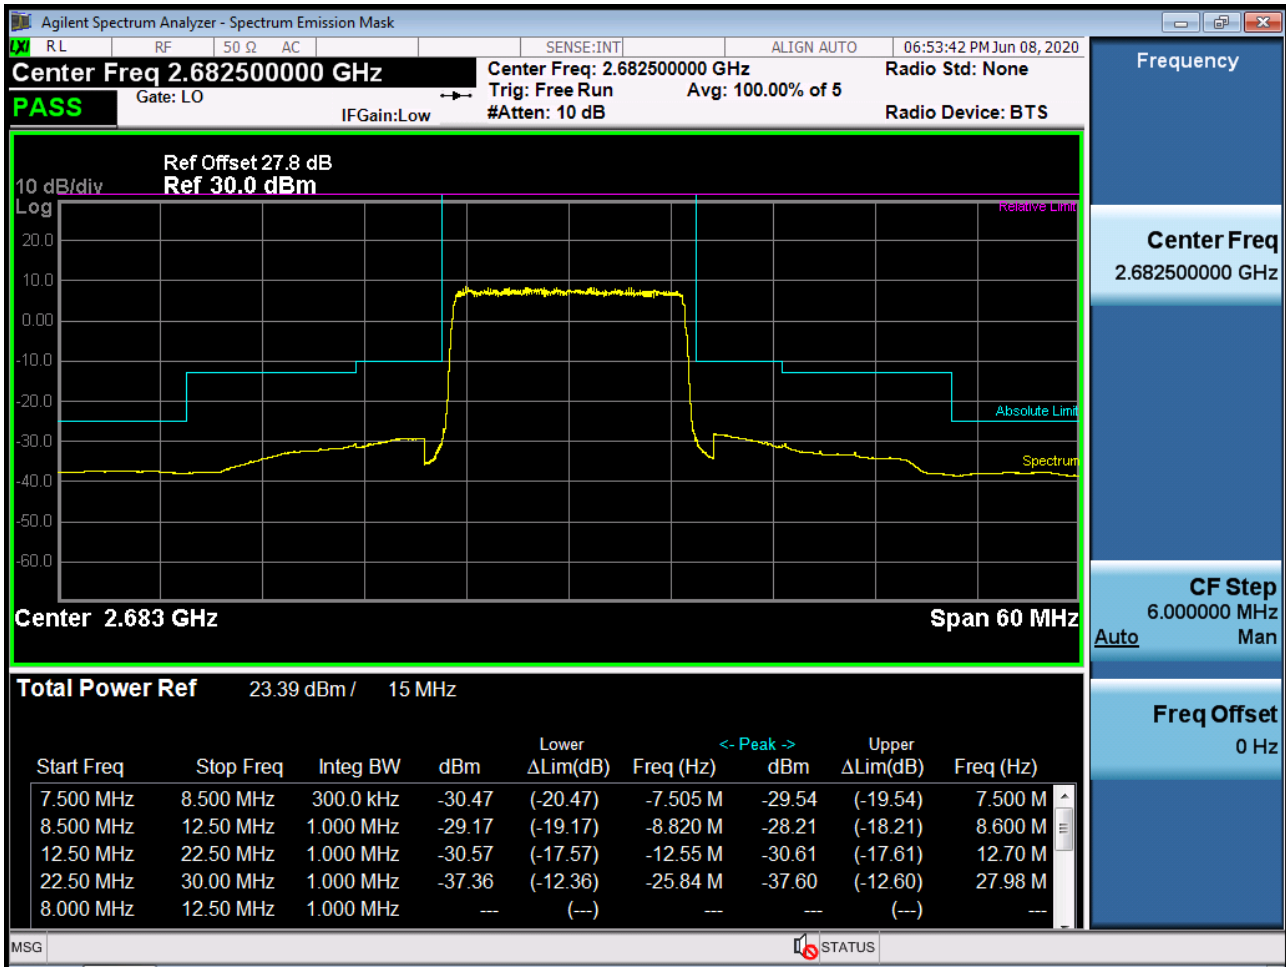

Low Channel Edge Plot (20 MHz Ch.39750 QPSK RB 1\_Offset 0) (POWER CLASS 3)

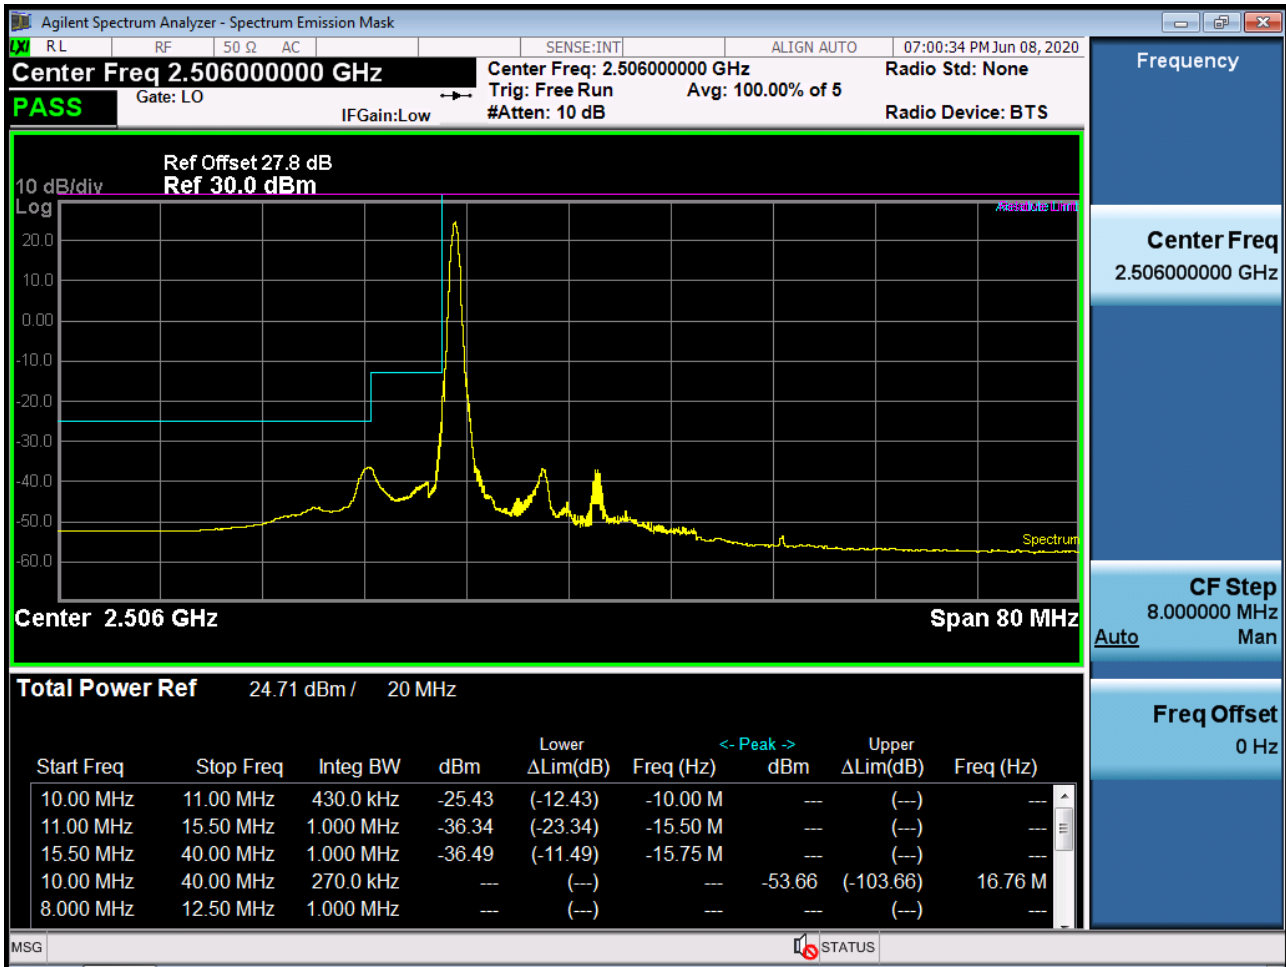

Low Channel Edge Plot (20 MHz Ch.39750 QPSK RB 100, Offset 0) (POWER CLASS 3)

