

FCC Carrier Aggregation REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
July 22, 2020

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
Report No.: HCT-RF-2007-FC040

FCC ID: A3LSMT878U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-T878U
 EUT Type: Tablet
 FCC Classification: PCS Licensed Transmitter (PCB)
 FCC Rule Part(s): §22, §2

Mode (PCC+SCC)	Tx Frequency (MHz)	Modulation	Emission Designator	ERP	
				Max. Power (dBm)	Max. Power (W)
3MHz+5MHz	825.6 - 846.5	QPSK	7M42G7D	24.29	0.27
		16QAM	7M43W7D	24.07	0.26
		64QAM	7M42W7D	22.79	0.19
		256QAM	7M48W7D	21.60	0.14
5MHz+3MHz	825.6 - 847.4	QPSK	7M47G7D	23.60	0.23
		16QAM	7M46W7D	22.91	0.20
		64QAM	7M49W7D	21.83	0.15
		256QAM	7M48W7D	20.68	0.12
5MHz+10MHz	826.8 - 844.0	QPSK	13M8G7D	23.85	0.24
		16QAM	13M8W7D	23.14	0.21
		64QAM	13M8W7D	21.75	0.15
		256QAM	13M9W7D	18.96	0.08
10MHz+5MHz	829.0 - 846.2	QPSK	13M9G7D	24.09	0.26
		16QAM	13M9W7D	23.59	0.23
		64QAM	13M9W7D	21.42	0.14
		256QAM	13M9W7D	19.43	0.09
10MHz+10MHz	829.0 - 844.0	QPSK	18M7G7D	23.77	0.24
		16QAM	18M7W7D	21.95	0.16
		64QAM	18M8W7D	19.70	0.09
		256QAM	18M7W7D	17.75	0.06

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report No.: HCT-RF-2007-FC040

REVIEWED BY



Report prepared by : Kwon Jeong
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2007-FC040	July 22, 2020	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION.....	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY.....	6
3. DESCRIPTION OF TESTS	7
3.1 TEST PROCEDURE.....	7
3.2 RADIATED POWER	8
3.3 RADIATED SPURIOUS EMISSIONS.....	9
3.4 OCCUPIED BANDWIDTH.....	10
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	11
3.6 BAND EDGE	12
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	13
4. LIST OF TEST EQUIPMENT.....	14
5. MEASUREMENT UNCERTAINTY	16
6. SUMMARY OF TEST RESULTS	17
7. SAMPLE CALCULATION	18
8. TEST DATA	20
8.1 Conducted Power	23
8.2 Equivalent Radiated Power.....	26
8.3 Conducted Spurious Emissions.....	29
8.4 Band Edge	42
8.5 Frequency Stability / Variation Of Ambient Temperature.....	58
8.6 Radiated Spurious Emissions	63
8.7 Occupied Bandwidth	66
9. ANNEX A_ TEST SETUP PHOTO	72

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMT878U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§22, §2
EUT Type:	Tablet
Model(s):	SM-T878U
Tx Frequency:	825.6 – 846.5: 3MHz+5MHz 825.6 - 847.4: 5MHz+3MHz 826.8 - 844.0: 5MHz+10MHz 829.0 - 846.2: 10MHz+5MHz 829.0 - 844.0: 10MHz+10MHz
Date(s) of Tests:	June 07, 2020 ~ July 17, 2020
LTE CA :	CA 5B(Uplink)

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Tablet with UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (HT20/40/80), Bluetooth, BT LE, WPT, mmWave(n260/261).

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW ≥ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundalmatal frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 OCCUPIED BANDWIDTH.

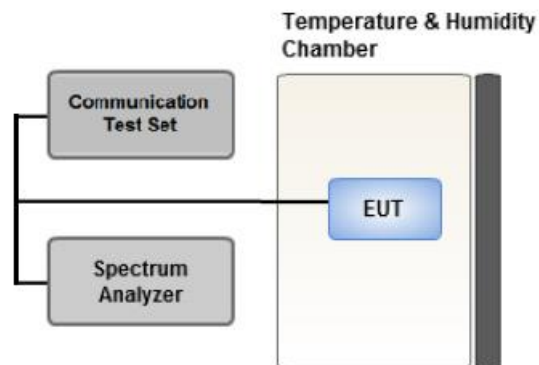

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

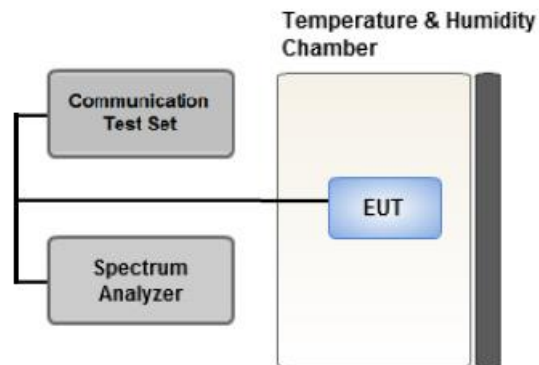

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.6 BAND EDGE



Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels (low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

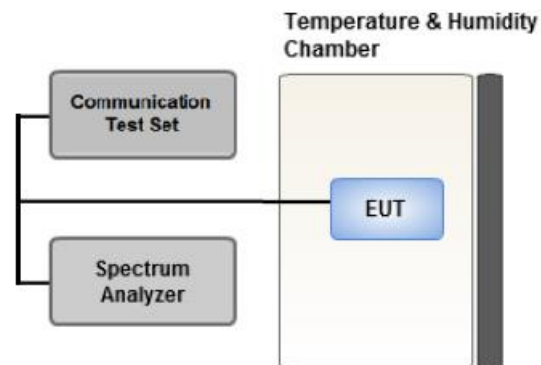

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibrati on Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
WAINWRIGHT INSTRUMENT	WHNX6.0/26.5G-6SS/H.P.F	1	03/19/2020	Annual	03/19/2021
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	04/27/2020	Annual	04/27/2021
Hewlett Packard	E3632A/DC Power Supply	MY4004427	09/27/2019	Annual	09/27/2020
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93000717	08/14/2019	Annual	08/14/2020
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	02/11/2020	Biennial	02/11/2022
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	04/27/2020	Annual	04/27/2021
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2020	Annual	06/04/2021
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/14/2019	Annual	10/14/2020
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/27/2019	Annual	08/27/2020
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	04/26/2019	Biennial	04/26/2021
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6201502997	08/09/2019	Annual	08/09/2020
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/22/2020	Annual	01/22/2021
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/13/2020	Annual	07/13/2021
KEYSIGHT	E7515B / 5G Wireless Tester	MY58300756	01/07/2020	Annual	01/07/2021
KEYSIGHT	N9030B / Signal Analyzer(5Hz~40.0GHz)	MY55480167	06/04/2020	Annual	06/04/2021
Mini-Circuits	ZC4PD-K1844+ / 4-Way Divider	942907	09/05/2019	Annual	09/05/2020
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).
3. Model : SMB100A (S/N: 177633)
 - Use date of Equipment : June 07, 2020 ~ July 12, 2020/ July 14, 2020 ~ July 17, 2020

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Frequency stability / variation of ambient temperature	§2.1055, §22.355	< 2.5 ppm	PASS

Note:

1. The same samples were used for SAR and EMC

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

64QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

Test Overview

The EUT is set up to transmit two contiguous LTE channels. The power level of both carriers and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Note

1. All tests were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth.
2. Channel bandwidth is shown in the tables below based only on the channel bandwidths that were supported in this device.

Channel Bandwidth (PCC)	Channel Bandwidth (SCC)	Maximum aggregated bandwidth (MHz)
3	5	8
5	3	8
5	10	15
10	5	15
10	10	20

3. All modes of operation were investigated and the worst case configuration results are reported in this section.

Please refer to the table below.

- Worst case(Conducted Spurious Emissions, Band Edge)
: We have selected higher of the Conduction Output Power.
- Worst case(Radiated Spurious Emissions) : We have selected higher of the ERP.
- Worst case(OBW, Frequency stability)
: All modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
Conducted Spurious Emissions/ Band Edge	QPSK	Low	5	826.8	20428	1	24	10	834.0	20500	1	0
	QPSK	Mid	5	831.8	20478	1	24	10	839.0	20550	1	0
	QPSK	High	5	836.8	20528	1	24	10	844.0	20600	1	0
	QPSK	Low	5	826.8	20428	1	0	10	834.0	20500	1	49
	QPSK	Mid	5	831.8	20478	1	0	10	839.0	20550	1	49
	QPSK	High	5	836.8	20528	1	0	10	844.0	20600	1	49
	QPSK	Low	3	825.6	20416	15	0	5	829.5	20455	25	0
	QPSK	Mid	3	834.1	20501	15	0	5	838.0	20540	25	0
	QPSK	High	3	842.6	20586	15	0	5	846.5	20625	25	0
	QPSK	Low	10	829.0	20450	50	0	10	838.9	20549	50	0
	QPSK	Mid	10	831.6	20476	50	0	10	841.5	20575	50	0
	QPSK	High	10	834.1	20501	50	0	10	844.0	20600	50	0
Radiated Spurious Emissions	QPSK	Low	3	825.6	20416	1	14	5	829.5	20455	1	0
	QPSK	Mid	5	831.8	20478	1	24	10	839.0	20550	1	0
	QPSK	High	5	836.8	20528	1	24	10	844.0	20600	1	0

[Worst case]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
OBW, PAR	QPSK, 16QAM, 64QAM, 256 QAM	Mid	3	834.1	20501	15	0	5	838.0	20540	25	0
			5	835.0	20510	25	0	3	838.9	20549	15	0
			5	831.8	20478	25	0	10	839.0	20550	50	0
			10	834.0	20500	50	0	5	841.2	20572	25	0
			10	831.6	20476	50	0	10	841.5	20575	50	0
Frequency stability	QPSK	Mid	3	834.1	20501	15	0	5	838.0	20540	25	0
			5	835.0	20510	25	0	3	838.9	20549	15	0
			5	831.8	20478	25	0	10	839.0	20550	50	0
			10	834.0	20500	50	0	5	841.2	20572	25	0
			10	831.6	20476	50	0	10	841.5	20575	50	0

8.1 Conducted Power

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	3	825.6	20416	1	14	5	829.5	20455	1	0	24.65
	5	826.5	20425	1	24	3	830.4	20464	1	0	24.60
	5	826.8	20428	1	24	10	834.0	20500	1	0	24.66
	10	829.0	20450	1	49	5	836.2	20522	1	0	24.60
	10	829.0	20450	1	49	10	838.9	20549	1	0	24.60
Mid	3	834.1	20501	1	14	5	838.0	20540	1	0	23.85
	5	835.0	20510	1	24	3	838.9	20549	1	0	24.06
	5	831.8	20478	1	24	10	839.0	20550	1	0	24.68
	10	834.0	20500	1	49	5	841.2	20572	1	0	24.58
	10	831.6	20476	1	49	10	841.5	20575	1	0	24.58
High	3	842.6	20586	1	14	5	846.5	20625	1	0	23.95
	5	843.5	20595	1	24	3	847.4	20634	1	0	23.90
	5	836.8	20528	1	24	10	844.0	20600	1	0	24.70
	10	839.0	20550	1	49	5	846.2	20622	1	0	24.52
	10	834.1	20501	1	49	10	844.0	20600	1	0	24.54

Note:

Modulation : QPSK(1RB)

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	3	825.6	20416	15	0	5	829.5	20455	25	0	24.48
	5	826.5	20425	25	0	3	830.4	20464	15	0	24.46
	5	826.8	20428	25	0	10	834.0	20500	50	0	23.14
	10	829.0	20450	50	0	5	836.2	20522	25	0	22.75
	10	829.0	20450	50	0	10	838.9	20549	50	0	22.81
Mid	3	834.1	20501	15	0	5	838.0	20540	25	0	23.84
	5	835.0	20510	25	0	3	838.9	20549	15	0	23.82
	5	831.8	20478	25	0	10	839.0	20550	50	0	22.81
	10	834.0	20500	50	0	5	841.2	20572	25	0	22.78
	10	831.6	20476	50	0	10	841.5	20575	50	0	22.80
High	3	842.6	20586	15	0	5	846.5	20625	25	0	23.90
	5	843.5	20595	25	0	3	847.4	20634	15	0	23.88
	5	836.8	20528	25	0	10	844.0	20600	50	0	22.80
	10	839.0	20550	50	0	5	846.2	20622	25	0	22.68
	10	834.1	20501	50	0	10	844.0	20600	50	0	22.77

Note:

Modulation : QPSK(Full RB)

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	826.8	20428	1	24	10	834.0	20500	1	0	24.15
Mid	5	831.8	20478	1	24	10	839.0	20550	1	0	24.35
High	5	836.8	20528	1	24	10	844.0	20600	1	0	24.37
Low	3	825.6	20416	15	0	5	829.5	20455	25	0	23.95
Mid	3	834.1	20501	15	0	5	838.0	20540	25	0	23.19
High	3	842.6	20586	15	0	5	846.5	20625	25	0	23.43

Note:

Modulation : 16QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	826.8	20428	1	24	10	834.0	20500	1	0	22.84
Mid	5	831.8	20478	1	24	10	839.0	20550	1	0	22.41
High	5	836.8	20528	1	24	10	844.0	20600	1	0	22.69
Low	3	825.6	20416	15	0	5	829.5	20455	25	0	23.04
Mid	3	834.1	20501	15	0	5	838.0	20540	25	0	22.07
High	3	842.6	20586	15	0	5	846.5	20625	25	0	22.22

Note:

Modulation : 64QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	826.8	20428	1	24	10	834.0	20500	1	0	20.12
Mid	5	831.8	20478	1	24	10	839.0	20550	1	0	19.93
High	5	836.8	20528	1	24	10	844.0	20600	1	0	19.96
Low	3	825.6	20416	15	0	5	829.5	20455	25	0	22.10
Mid	3	834.1	20501	15	0	5	838.0	20540	25	0	20.81
High	3	842.6	20586	15	0	5	846.5	20625	25	0	21.10

Note:

Modulation : 256QAM

8.2 Equivalent Radiated Power

	PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.R.P	
	BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
Low	3	20416	1/14	5	20455	1/0	-28.11	35.79	-10.21	1.29	H	0.27	24.29
	5	20425	1/24	3	20464	1/0	-28.80	35.10	-10.21	1.29	H	0.23	23.60
	5	20428	1/24	10	20500	1/0	-28.85	35.05	-10.21	1.29	H	0.23	23.55
	10	20450	1/49	5	20522	1/0	-28.31	35.59	-10.21	1.29	H	0.26	24.09
	10	20450	1/49	10	20549	1/0	-30.01	33.89	-10.21	1.29	H	0.17	22.39
Mid	3	20501	1/14	5	20540	1/0	-30.43	33.75	-10.19	1.29	H	0.17	22.27
	5	20510	1/24	3	20549	1/0	-30.04	34.14	-10.19	1.29	H	0.18	22.66
	5	20478	1/24	10	20550	1/0	-28.85	35.33	-10.19	1.29	H	0.24	23.85
	10	20500	1/49	5	20572	1/0	-29.33	34.85	-10.19	1.29	H	0.22	23.37
	10	20476	1/49	10	20575	1/0	-28.93	35.25	-10.19	1.29	H	0.24	23.77
High	3	20586	1/14	5	20625	1/0	-29.58	34.64	-10.19	1.30	H	0.21	23.15
	5	20595	1/24	3	20634	1/0	-30.10	34.12	-10.19	1.30	H	0.18	22.63
	5	20528	1/24	10	20600	1/0	-29.10	35.12	-10.19	1.30	H	0.23	23.63
	10	20550	1/49	5	20622	1/0	-29.80	34.42	-10.19	1.30	H	0.20	22.93
	10	20501	1/49	10	20600	1/0	-29.40	34.82	-10.19	1.30	H	0.22	23.33

Note:

1. Modulation : QPSK
2. Limit : < 2 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.R.P	
BW [MHz]	Channel	RB/ Offset	BW [MHz]	Channel	RB/ Offset						W	dBm
3	20416	1/14	5	20455	1/0	-28.33	15.64	10.75	2.32	H	0.26	24.07
5	20425	1/24	3	20464	1/0	-29.49	14.48	10.75	2.32	H	0.20	22.91
5	20428	1/24	10	20500	1/0	-29.26	14.71	10.75	2.32	H	0.21	23.14
10	20450	1/49	5	20522	1/0	-28.81	15.16	10.75	2.32	H	0.23	23.59
10	20450	1/49	10	20549	1/0	-30.45	13.52	10.75	2.32	H	0.16	21.95
5	20478	1/24	10	20550	1/0	-29.38	14.69	10.98	2.35	H	0.22	23.32
5	20528	1/24	10	20600	1/0	-29.70	14.32	11.10	2.39	H	0.20	23.03

Note:

1. Modulation : 16QAM
2. Limit : < 2 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.R.P	
BW [MHz]	Channel	RB/ Offset	BW [MHz]	Channel	RB/ Offset						W	dBm
3	20416	1/14	5	20455	1/0	-29.61	14.36	10.75	2.32	H	0.19	22.79
5	20425	1/24	3	20464	1/0	-30.57	13.40	10.75	2.32	H	0.15	21.83
5	20428	1/24	10	20500	1/0	-30.65	13.32	10.75	2.32	H	0.15	21.75
10	20450	1/49	5	20522	1/0	-30.98	12.99	10.75	2.32	H	0.14	21.42
10	20450	1/49	10	20549	1/0	-32.70	11.27	10.75	2.32	H	0.09	19.70
5	20478	1/24	10	20550	1/0	-31.56	12.51	10.98	2.35	H	0.13	21.14
5	20528	1/24	10	20600	1/0	-31.35	12.67	11.10	2.39	H	0.14	21.38

Note:

1. Modulation : 64QAM
2. Limit : < 2 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
3	20416	1/14	5	20455	1/0	-30.80	13.17	10.75	2.32	H	0.14	21.60
5	20425	1/24	3	20464	1/0	-31.72	12.25	10.75	2.32	H	0.12	20.68
5	20428	1/24	10	20500	1/0	-33.44	10.53	10.75	2.32	H	0.08	18.96
10	20450	1/49	5	20522	1/0	-32.97	11.00	10.75	2.32	H	0.09	19.43
10	20450	1/49	10	20549	1/0	-34.65	9.32	10.75	2.32	H	0.06	17.75
5	20478	1/24	10	20550	1/0	-33.47	10.60	10.98	2.35	H	0.08	19.23
5	20528	1/24	10	20600	1/0	-33.77	10.25	11.10	2.39	H	0.08	18.96

Note:

1. Modulation : 256QAM
2. Limit : < 2 Watts

8.3 Conducted Spurious Emissions

Operating frequency	PCC				SCC				Measurement Maximum Frequency (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)
	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset				
Low	5	20428	826.8	1/24	10	20500	834.0	1/0	3.1661	27.976	-76.56	-48.59
Mid	5	20478	831.8	1/24	10	20550	839.0	1/0	9.6830	28.591	-76.81	-48.22
High	5	20528	836.8	1/24	10	20600	844.0	1/0	8.0514	28.591	-76.75	-48.16
Low	5	20428	826.8	1/0	10	20500	834.0	1/49	3.7892	27.976	-76.38	-48.40
Mid	5	20478	831.8	1/0	10	20550	839.0	1/49	3.1287	27.976	-76.86	-48.88
High	5	20528	836.8	1/0	10	20600	844.0	1/49	8.0055	28.591	-76.35	-47.76
Low	3	20416	825.6	15/0	5	20455	829.5	25/0	8.0559	28.591	-76.38	-47.79
Mid	3	20501	834.1	15/0	5	20540	838.0	25/0	8.0424	28.591	-76.96	-48.37
High	3	20586	842.6	15/0	5	20625	846.5	25/0	7.1561	28.591	-77.10	-48.51
Low	10	20450	829.0	50/0	10	20549	838.9	50/0	4.0454	27.976	-76.52	-48.55
Mid	10	20476	831.6	50/0	10	20575	841.5	50/0	8.0035	28.591	-74.99	-46.40
High	10	20501	834.1	50/0	10	20600	844.0	50/0	7.9751	28.591	-76.53	-47.94

Note:


1. Modulation : QPSK
2. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter
3. Factors for frequency :

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


4. Limit : -13.0 dBm

Frequency Range : 30MHz ~ 10GHz


PCC 3MHz Ch20416 RB15 Offset0 SCC 5MHz Ch20455 RB25 Offset0

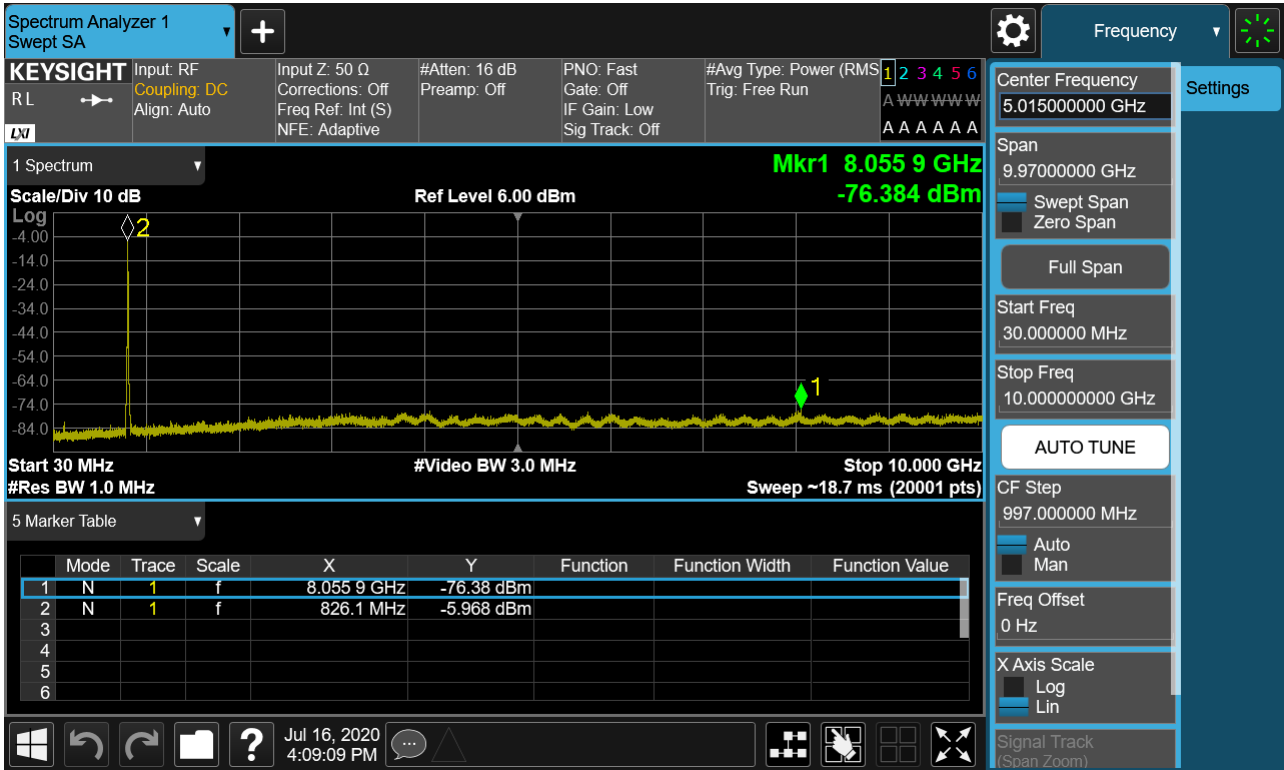


PCC 3MHz Ch20501 RB15 Offset0 SCC 5MHz Ch20540 RB25 Offset0

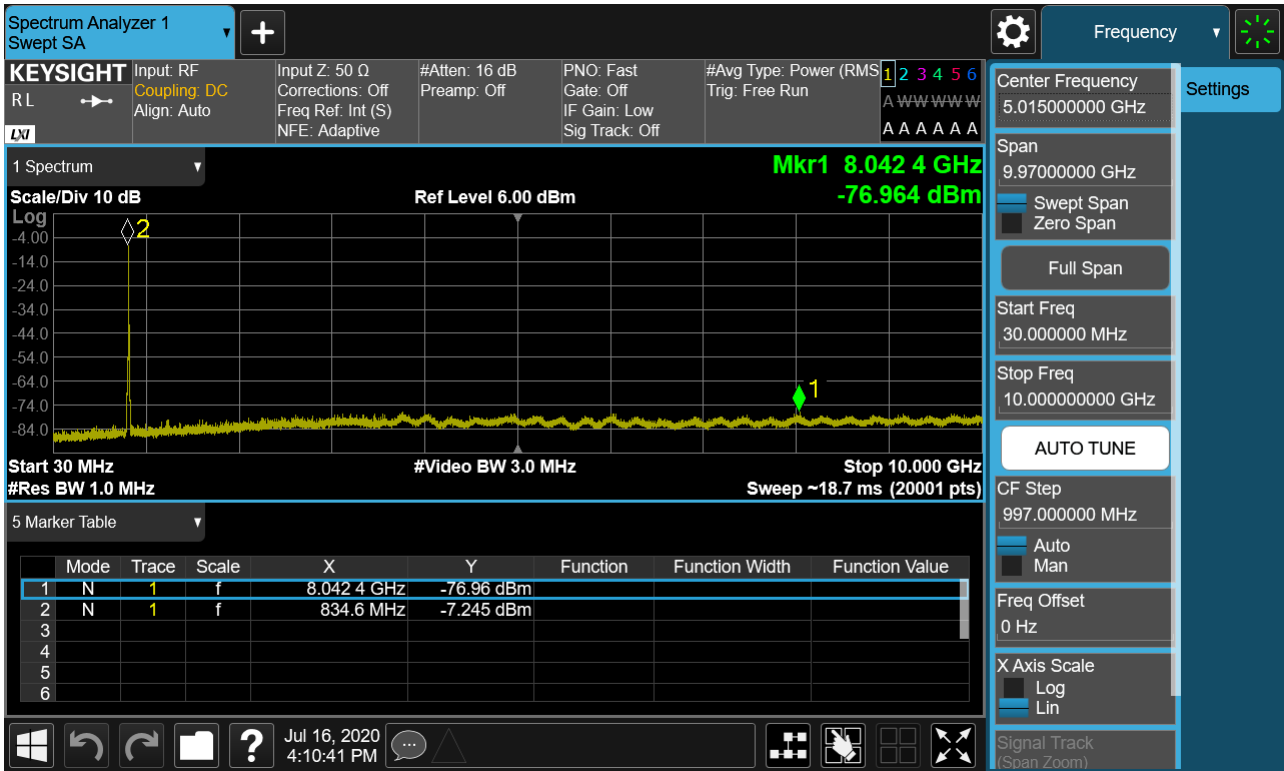


PCC 3MHz Ch20586 RB15 Offset0 SCC 5MHz Ch20625 RB25 Offset0

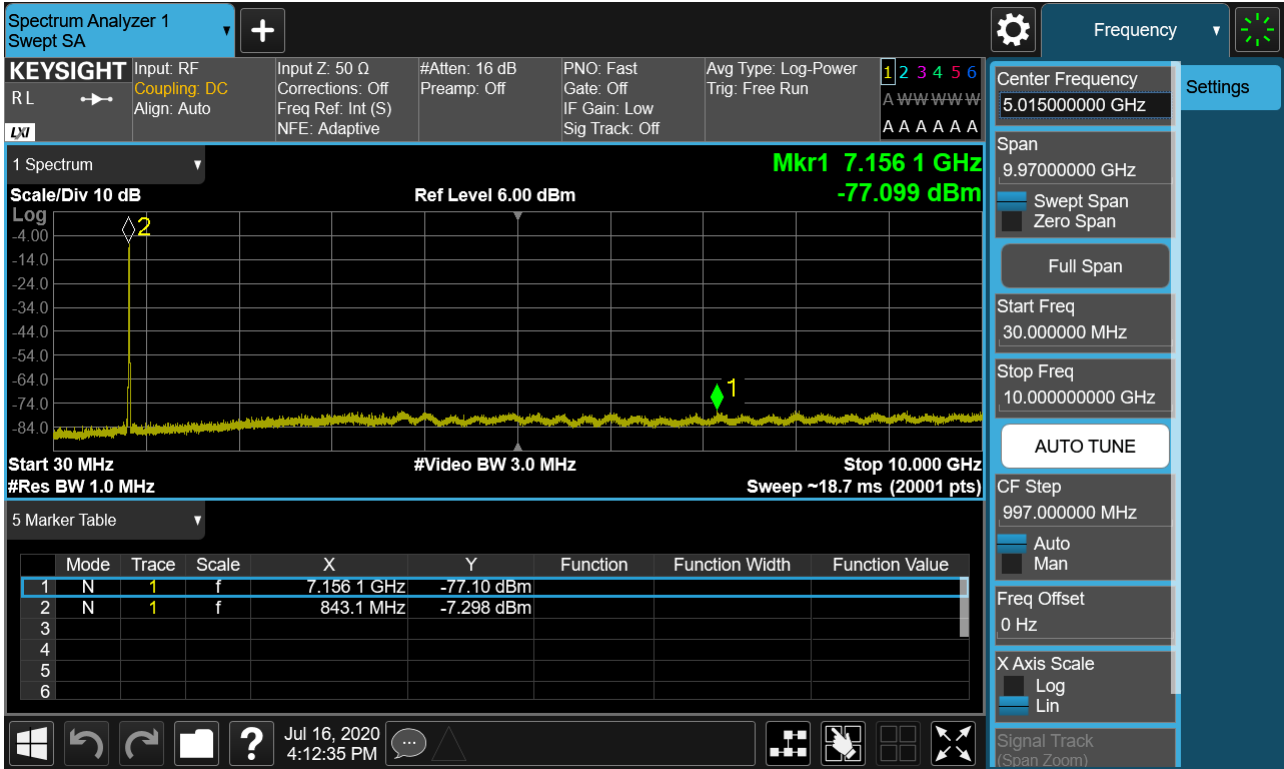


PCC 5MHz Ch20428 RB1 Offset0 SCC 10MHz Ch20500 RB1 Offset49

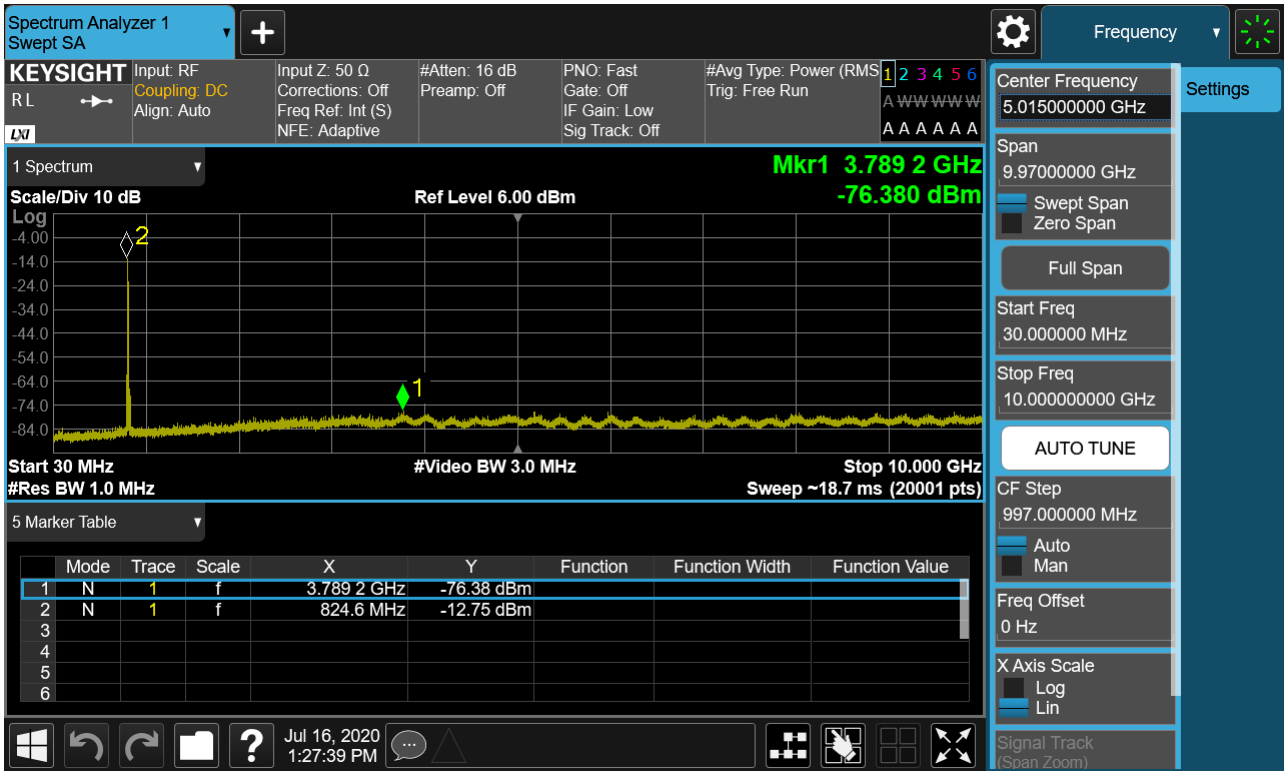


PCC 5MHz Ch20428 RB1 Offset24 SCC 10MHz Ch20500 RB1 Offset0

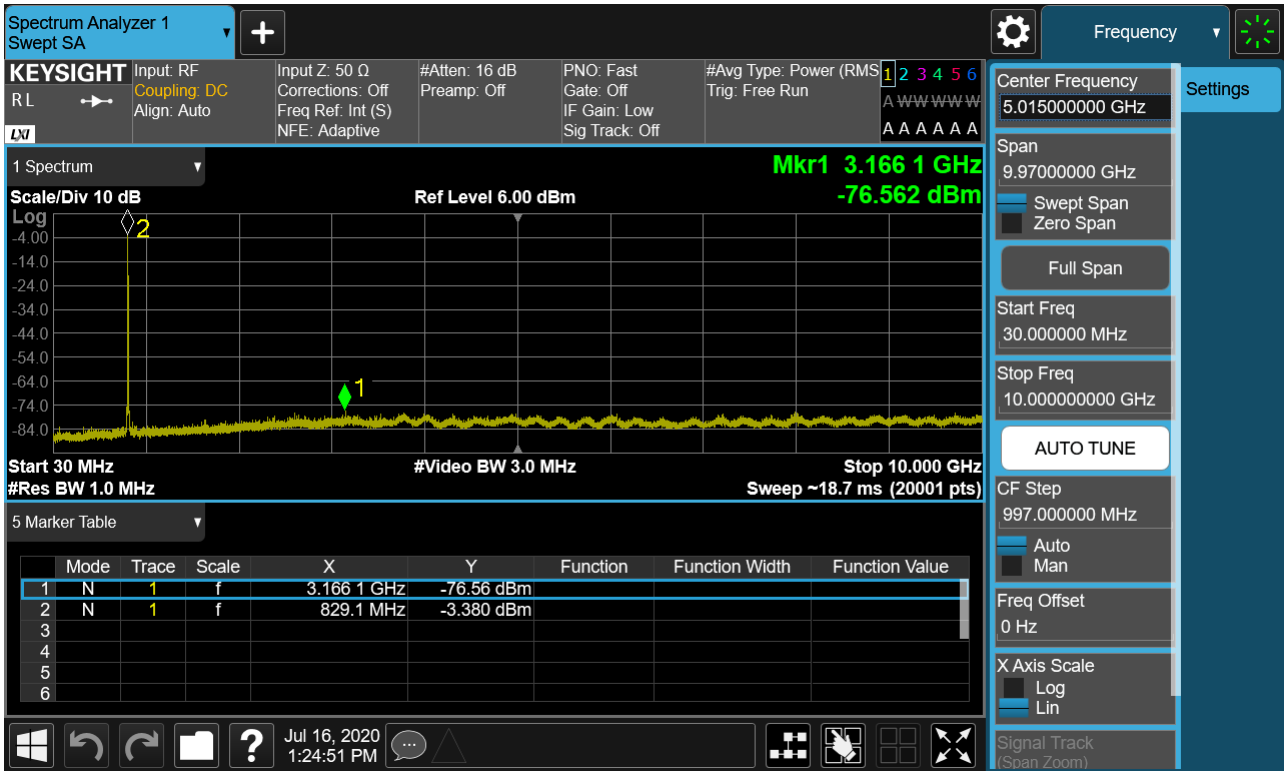


PCC 5MHz Ch20478 RB1 Offset0 SCC 10MHz Ch20550 RB1 Offset49

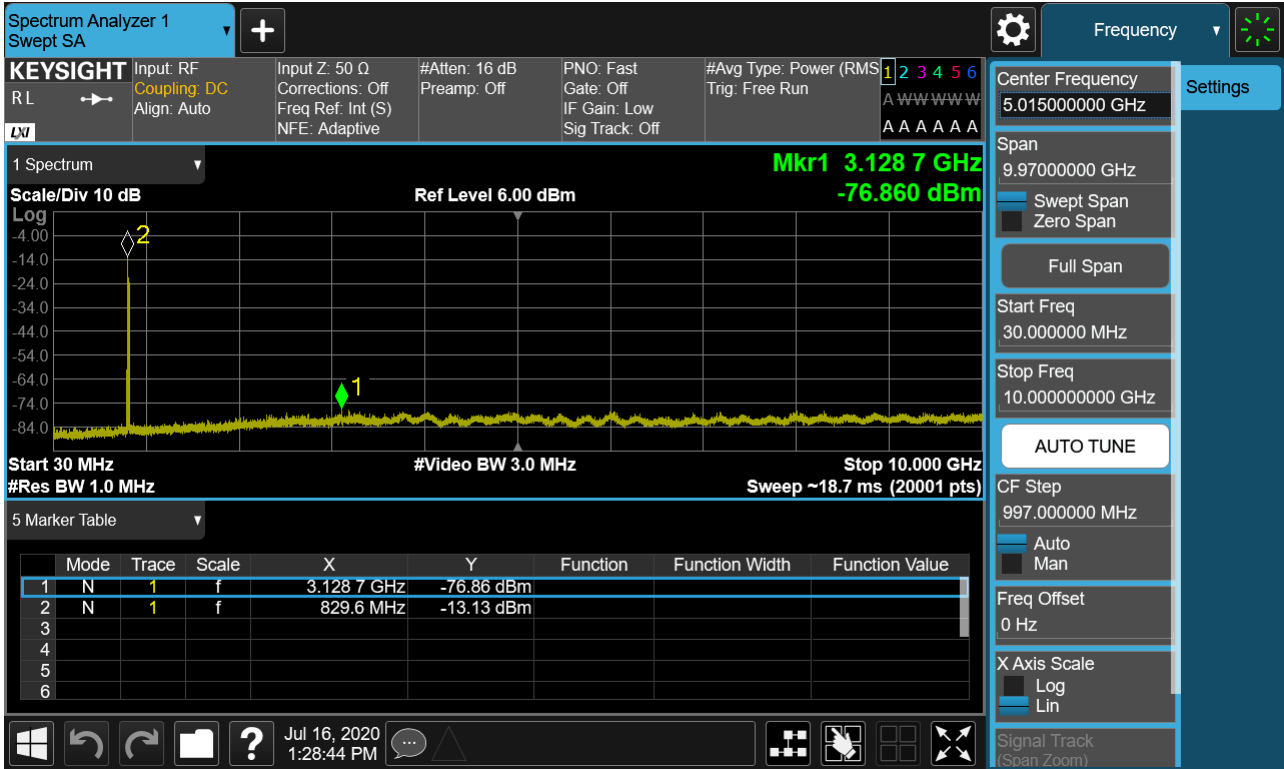


PCC 5MHz Ch20478 RB1 Offset24 SCC 10MHz Ch20550 RB1 Offset0

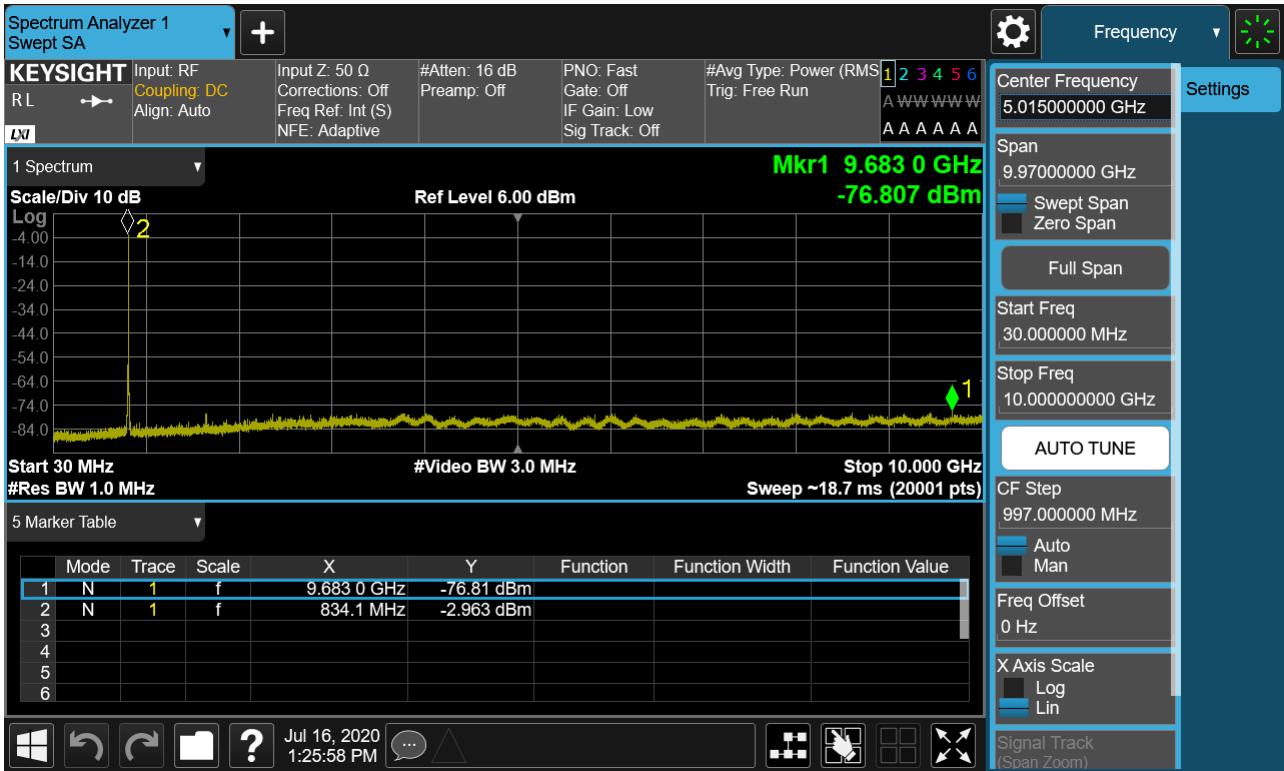

PCC 5MHz Ch20528 RB1 Offset0 SCC 10MHz Ch20600 RB1 Offset49

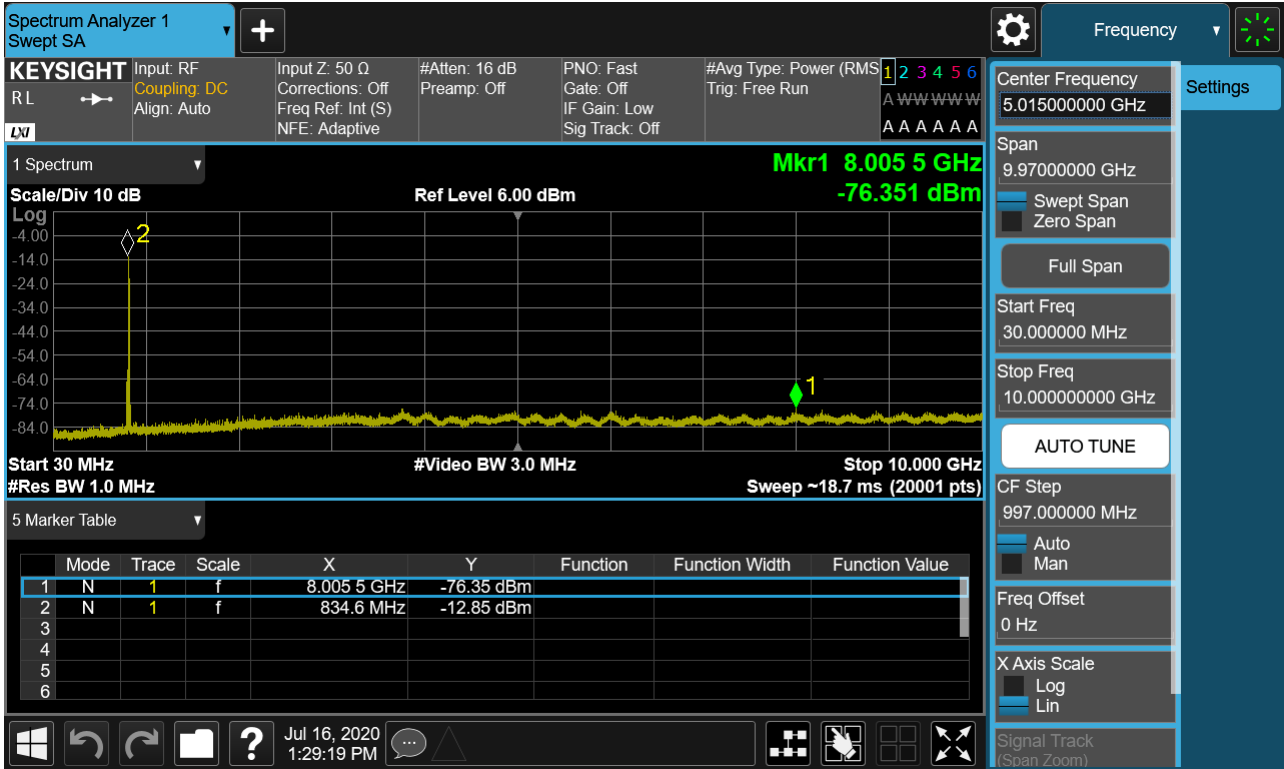


PCC 5MHz Ch20528 RB1 Offset24 SCC 10MHz Ch20600 RB1 Offset0

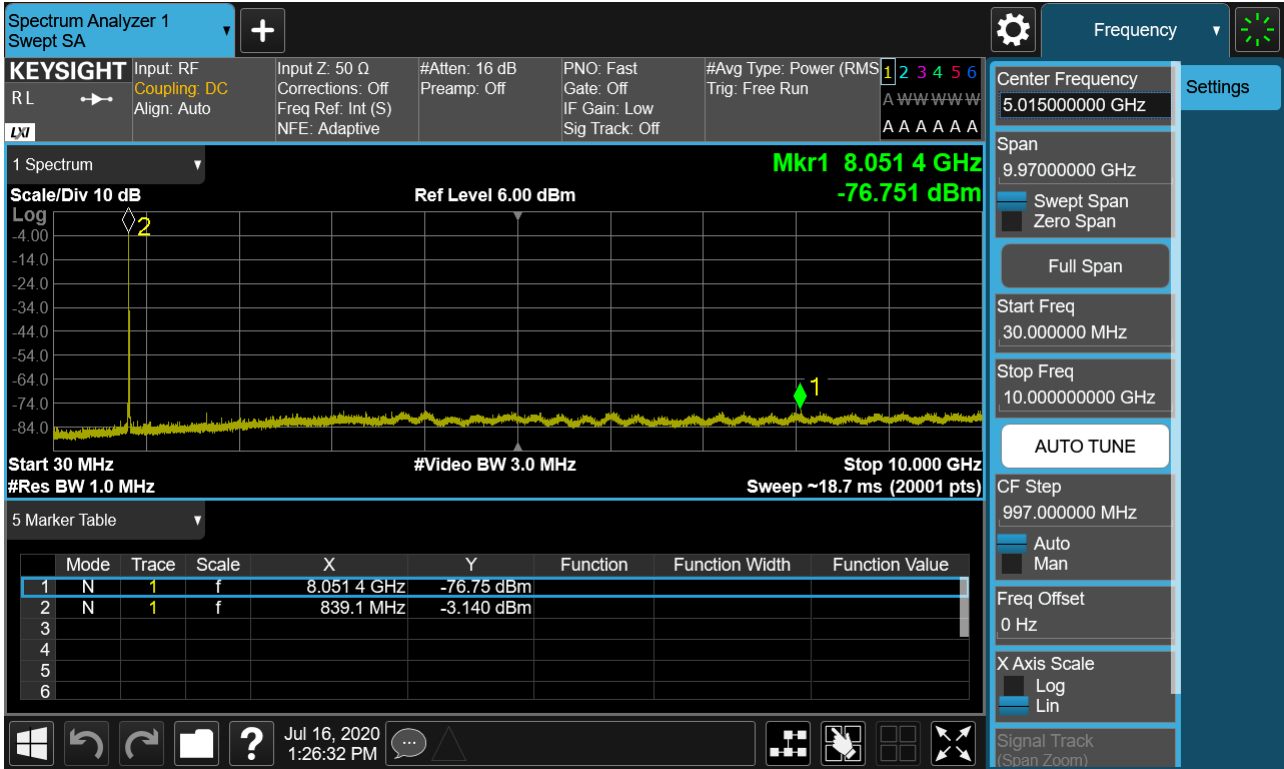


PCC 10MHz Ch20450 RB50 Offset0 SCC 10MHz Ch20549 RB50 Offset0



PCC 10MHz Ch20476 RB50 Offset0 SCC 10MHz Ch20575 RB50 Offset0

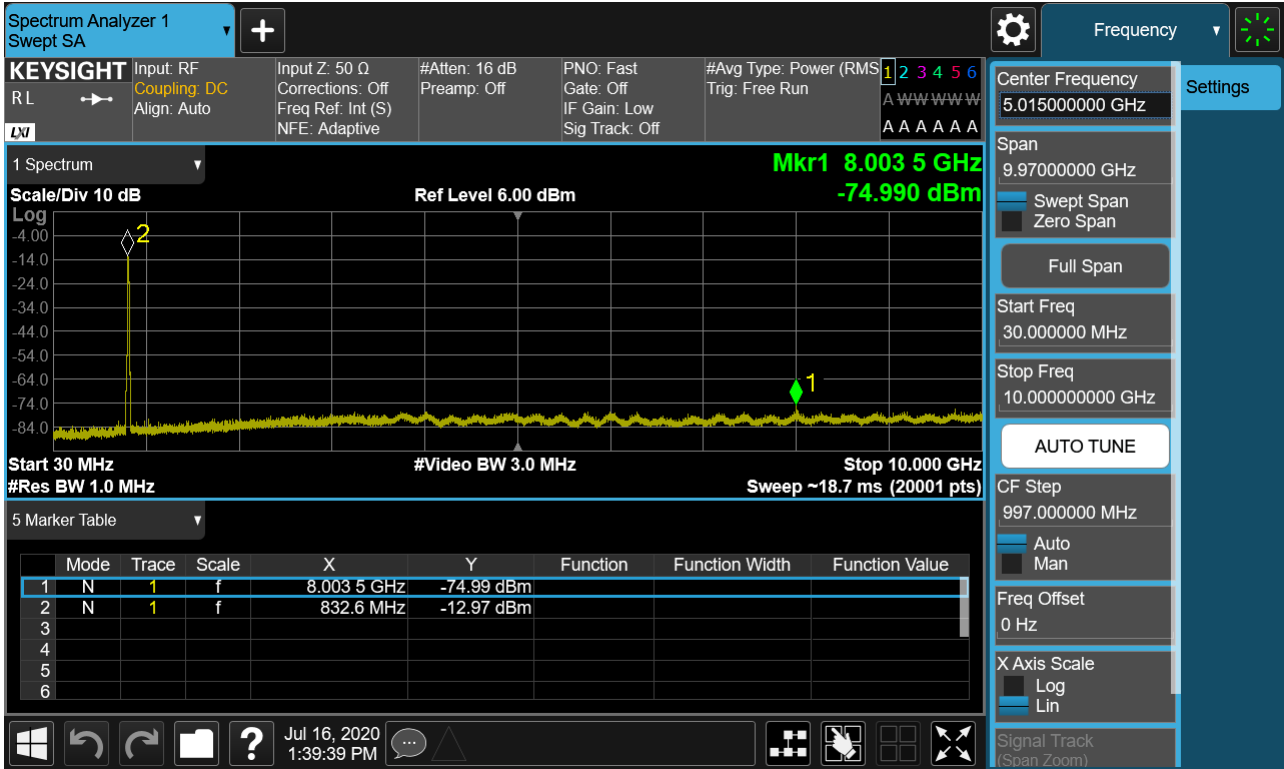


PCC 10MHz Ch20501 RB50 Offset0 SCC 10MHz Ch20600 RB50 Offset0

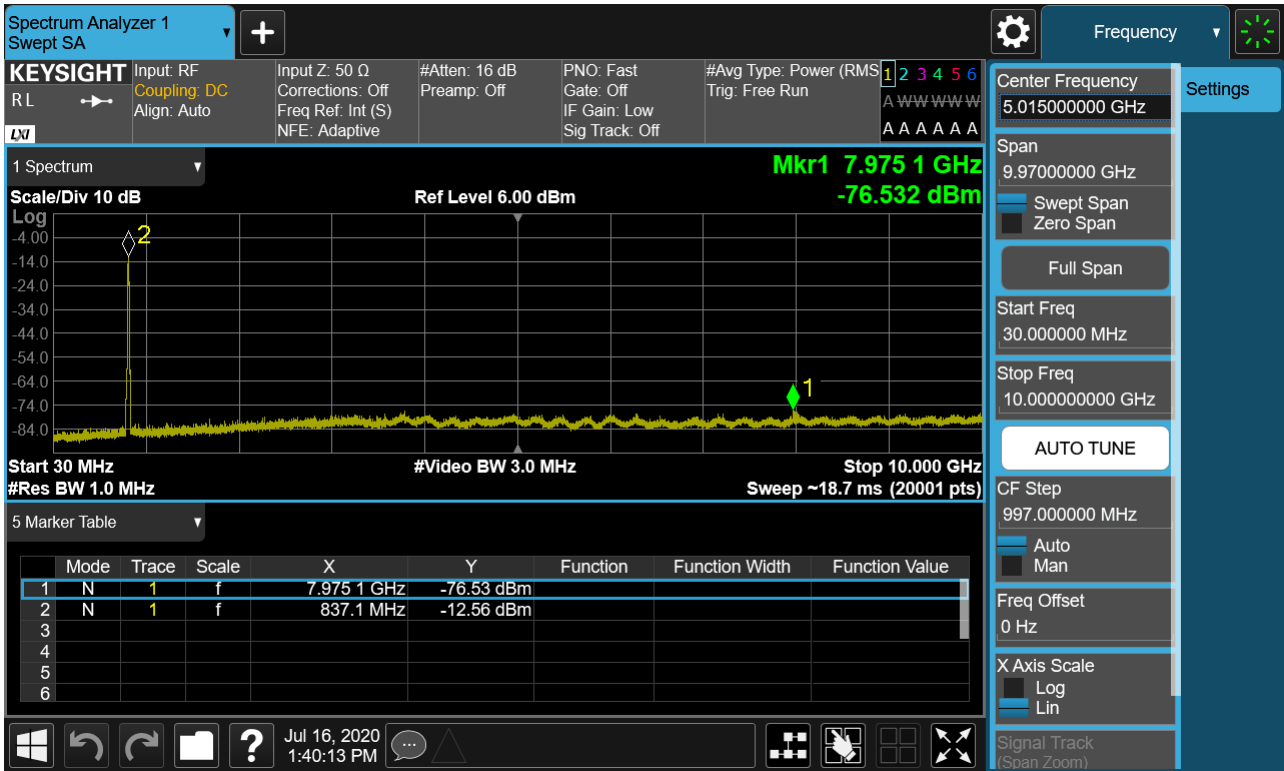


8.4 Band Edge


PCC 3MHz Ch20416 RB15 Offset0 SCC 5MHz Ch20455 RB25 Offset0(1)

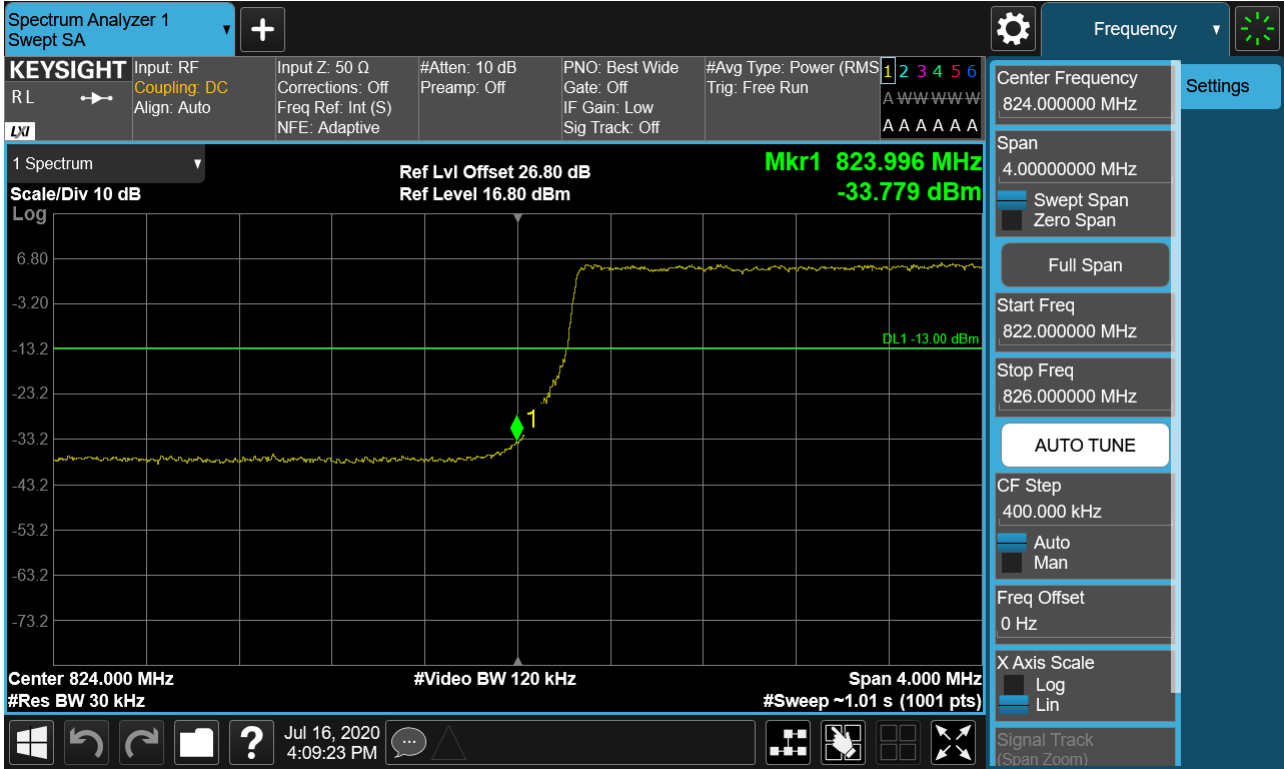


PCC 3MHz Ch20416 RB15 Offset0 SCC 5MHz Ch20455 RB25 Offset0(2)

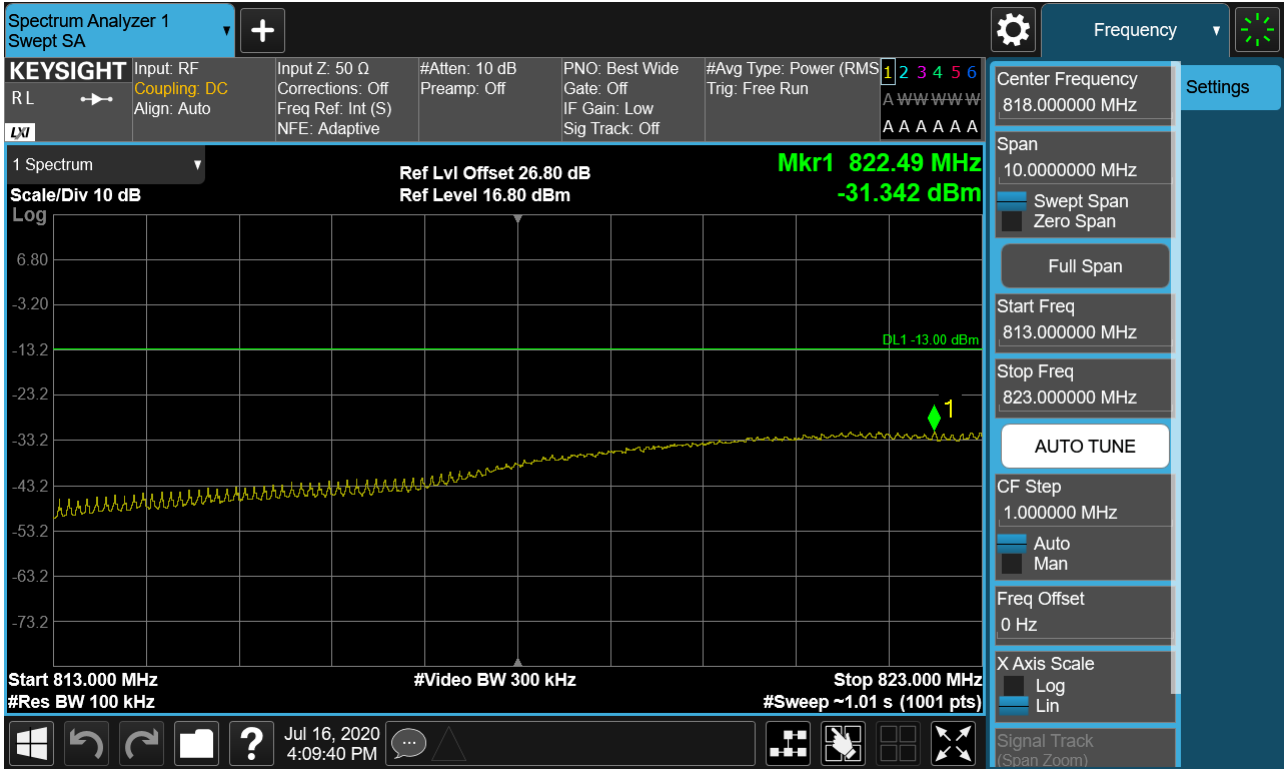


PCC 5MHz Ch20428 RB1 Offset0 SCC 10MHz Ch20500 RB1 Offset49(1)

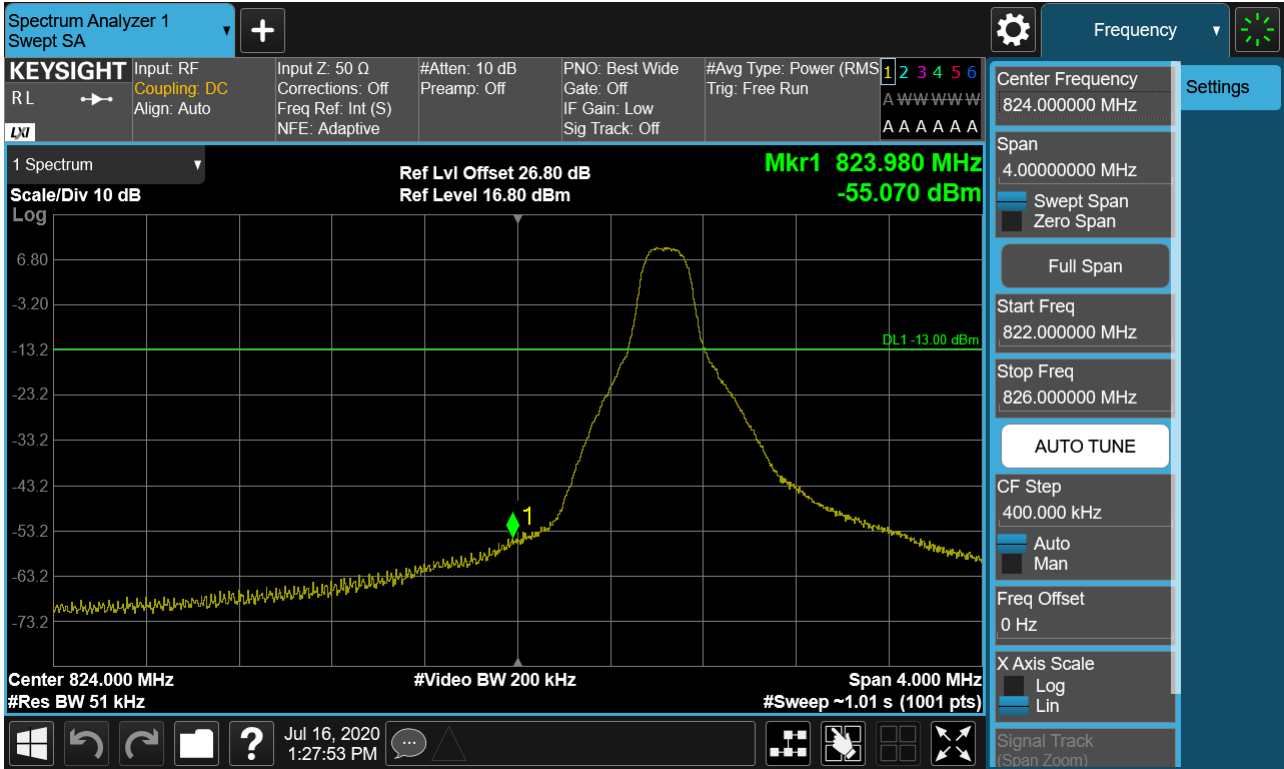


PCC 5MHz Ch20428 RB1 Offset0 SCC 10MHz Ch20500 RB1 Offset49(2)

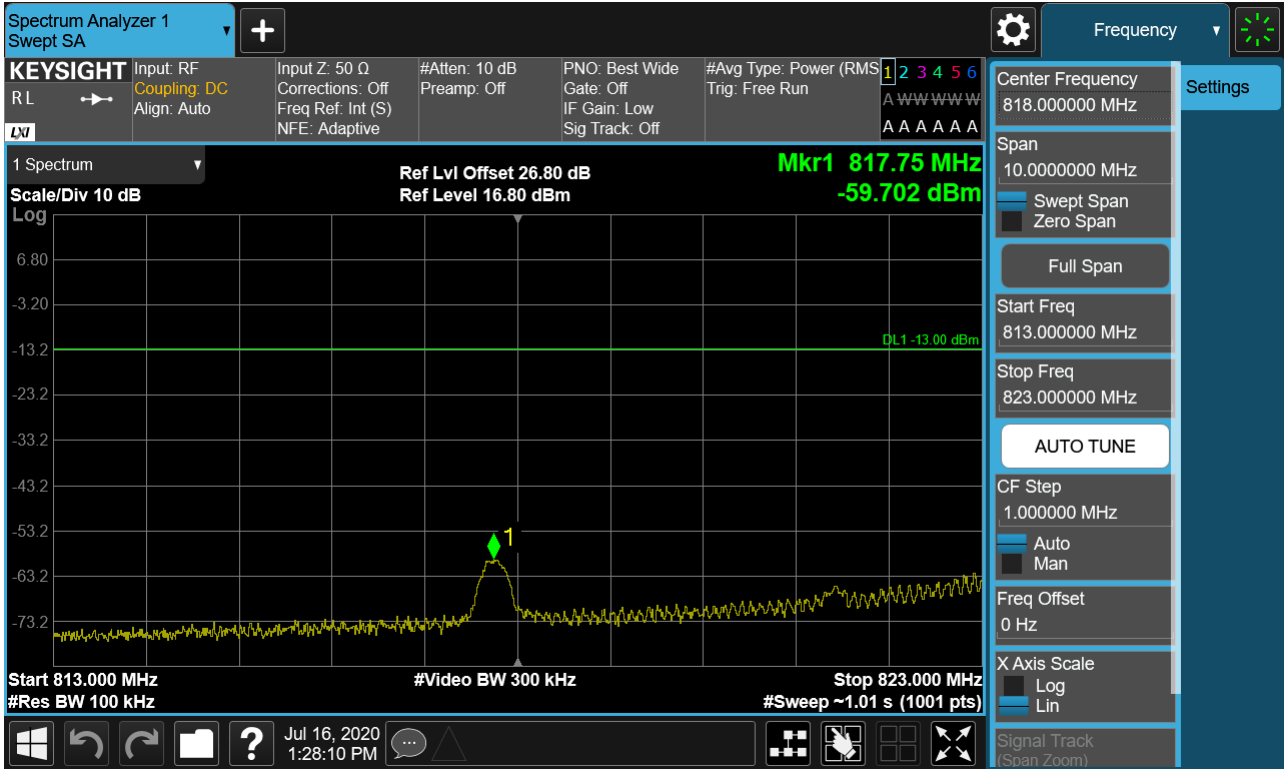


PCC 5MHz Ch20428 RB1 Offset24 SCC 10MHz Ch20500 RB1 Offset0(1)

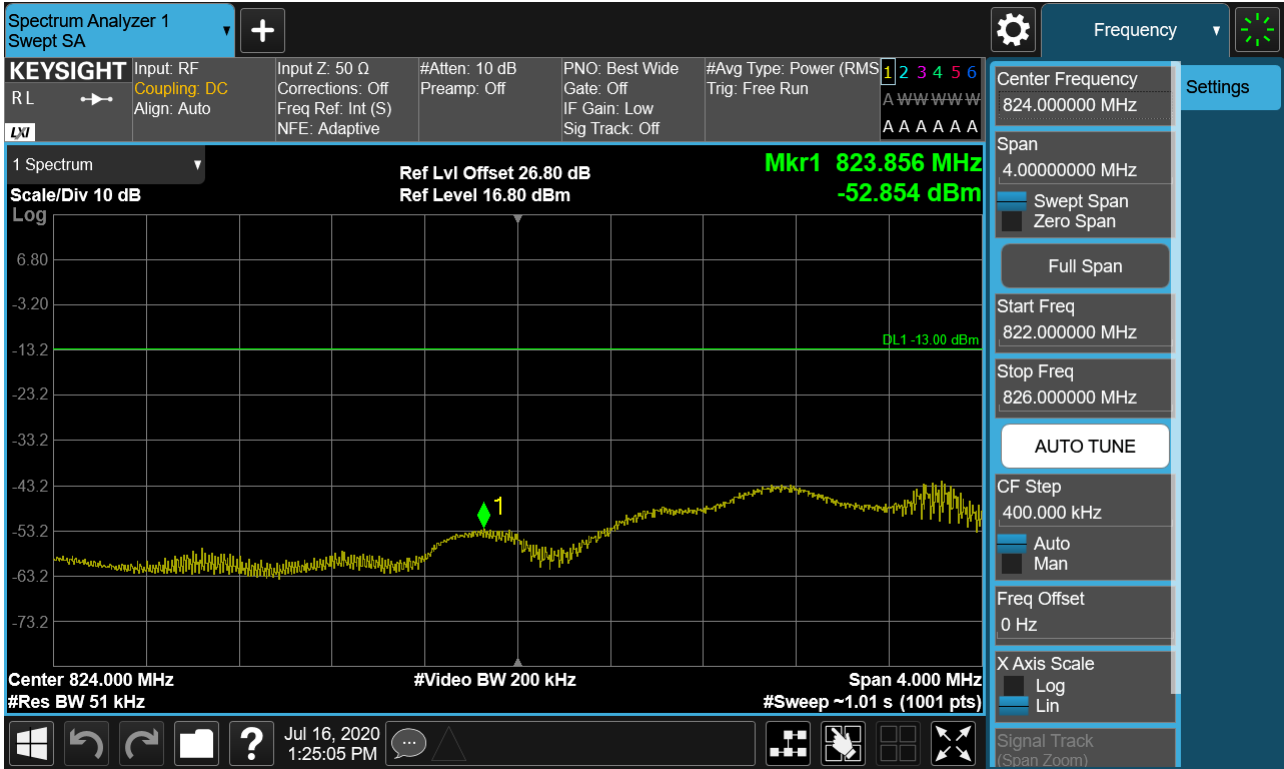

PCC 5MHz Ch20428 RB1 Offset24 SCC 10MHz Ch20500 RB1 Offset0(2)

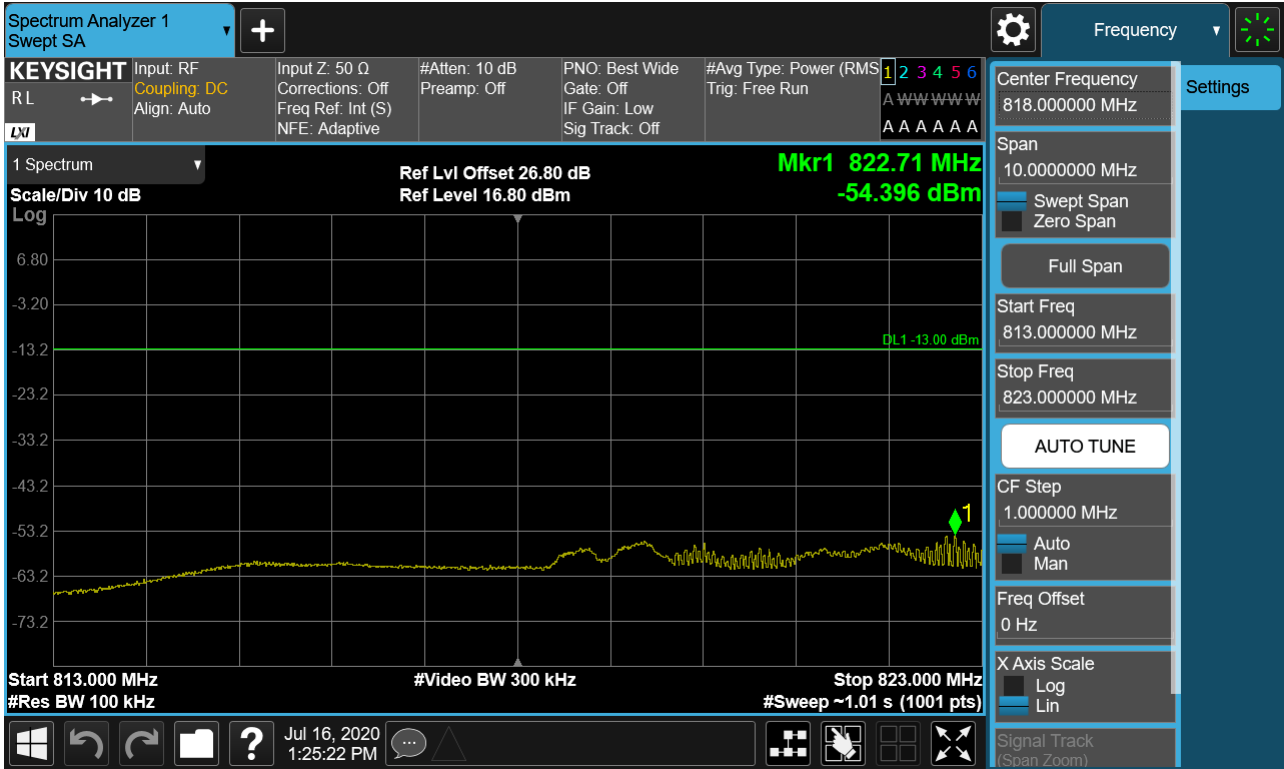


PCC 10MHz Ch20450 RB50 Offset0 SCC 10MHz Ch20549 RB50 Offset0(1)

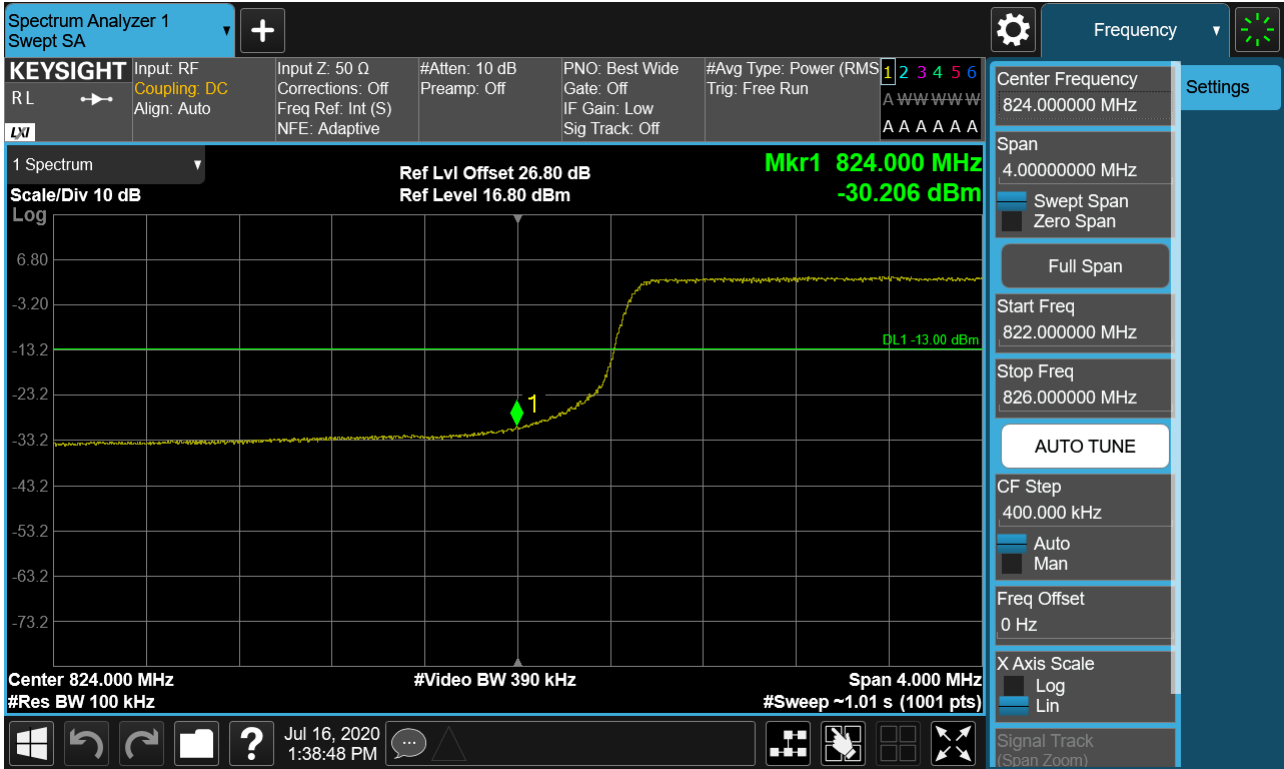


PCC 10MHz Ch20450 RB50 Offset0 SCC 10MHz Ch20549 RB50 Offset0(2)




PCC 3MHz Ch20586 RB15 Offset0 SCC 5MHz Ch20625 RB25 Offset0(1)

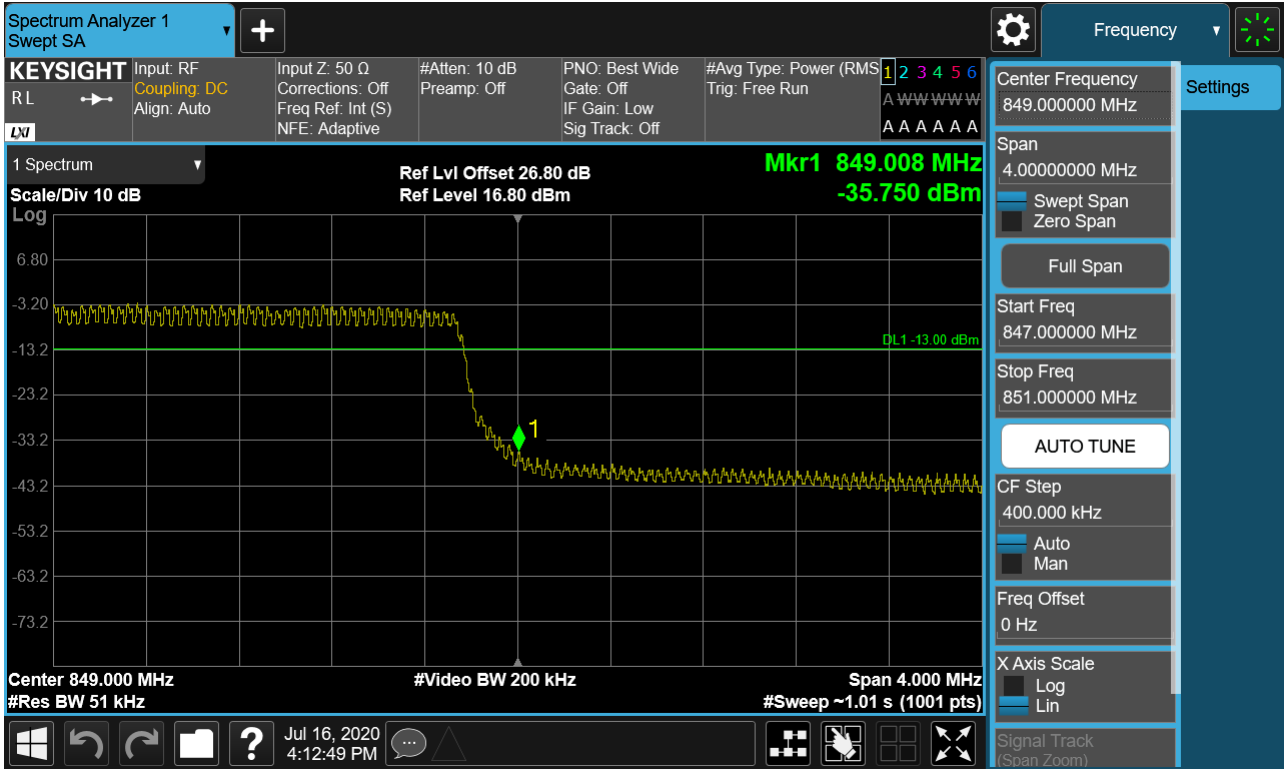


PCC 3MHz Ch20586 RB15 Offset0 SCC 5MHz Ch20625 RB25 Offset0(2)

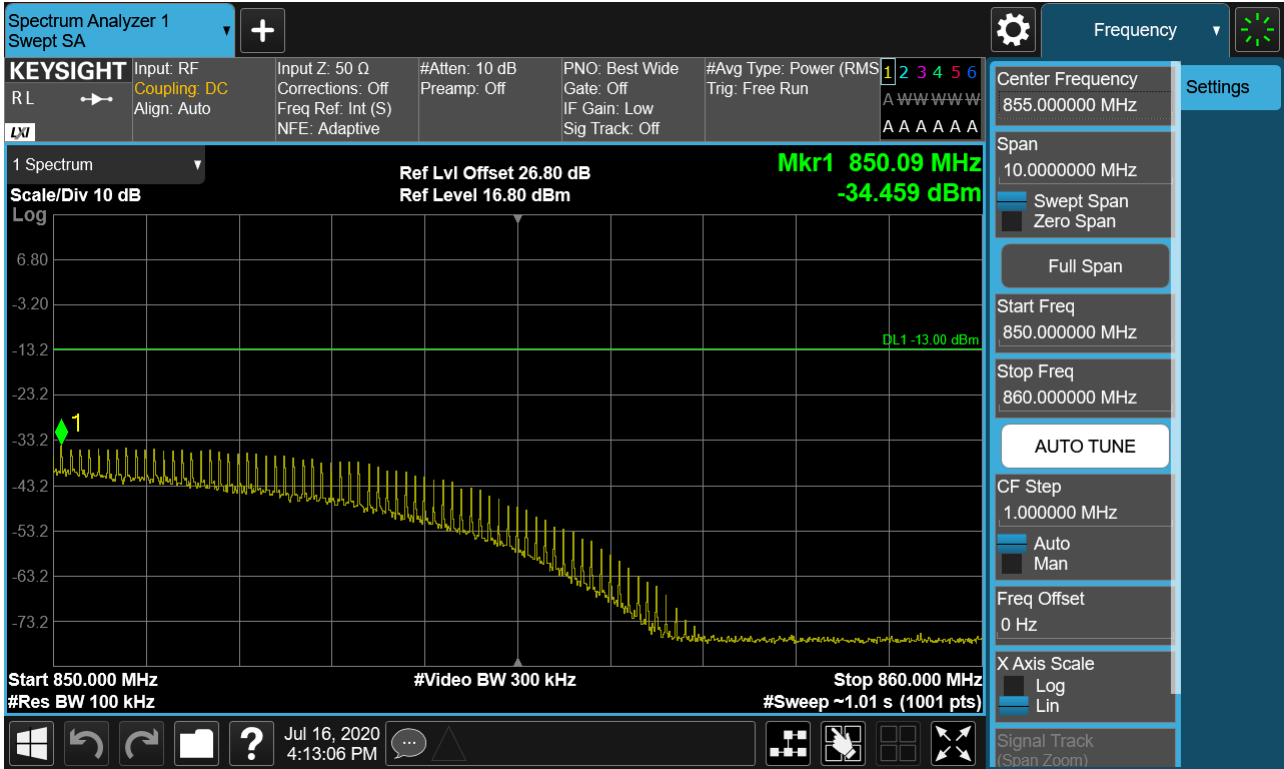


PCC 5MHz Ch20528 RB1 Offset0 SCC 10MHz Ch20600 RB1 Offset49(1)

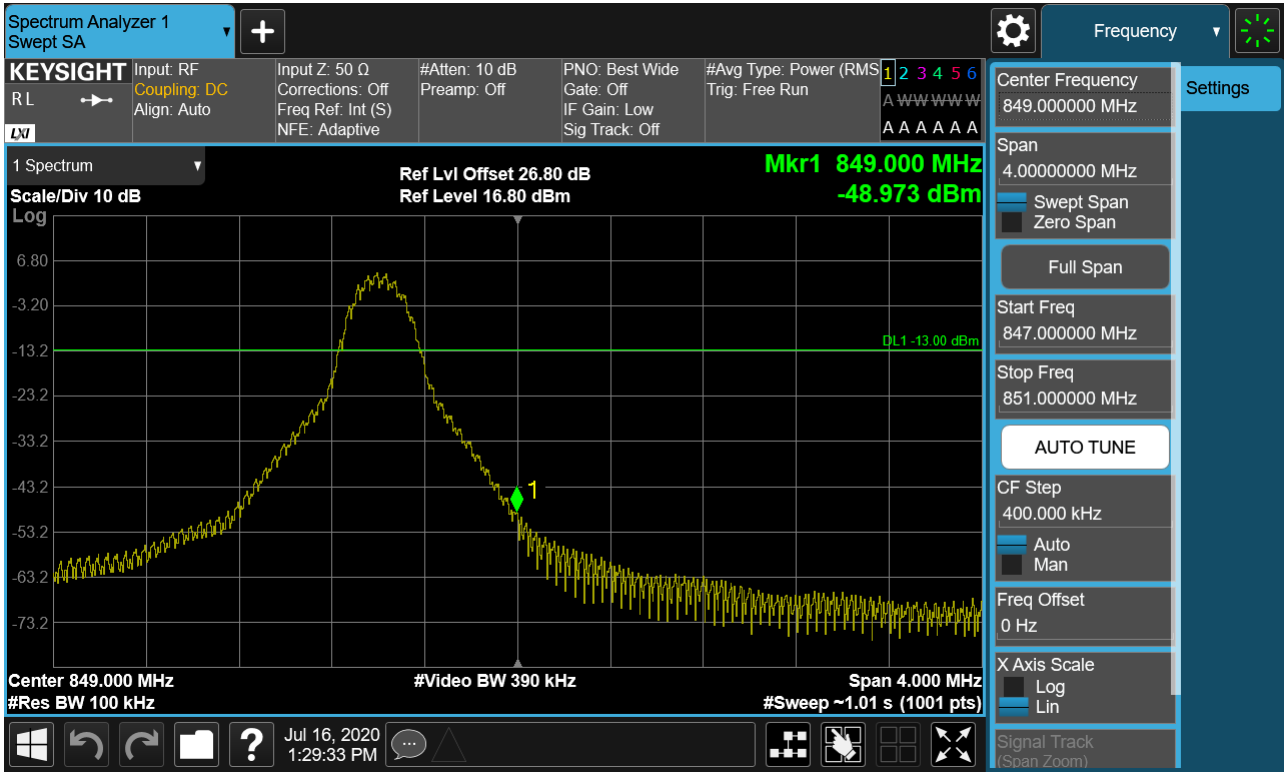

PCC 5MHz Ch20528 RB1 Offset0 SCC 10MHz Ch20600 RB1 Offset49(2)

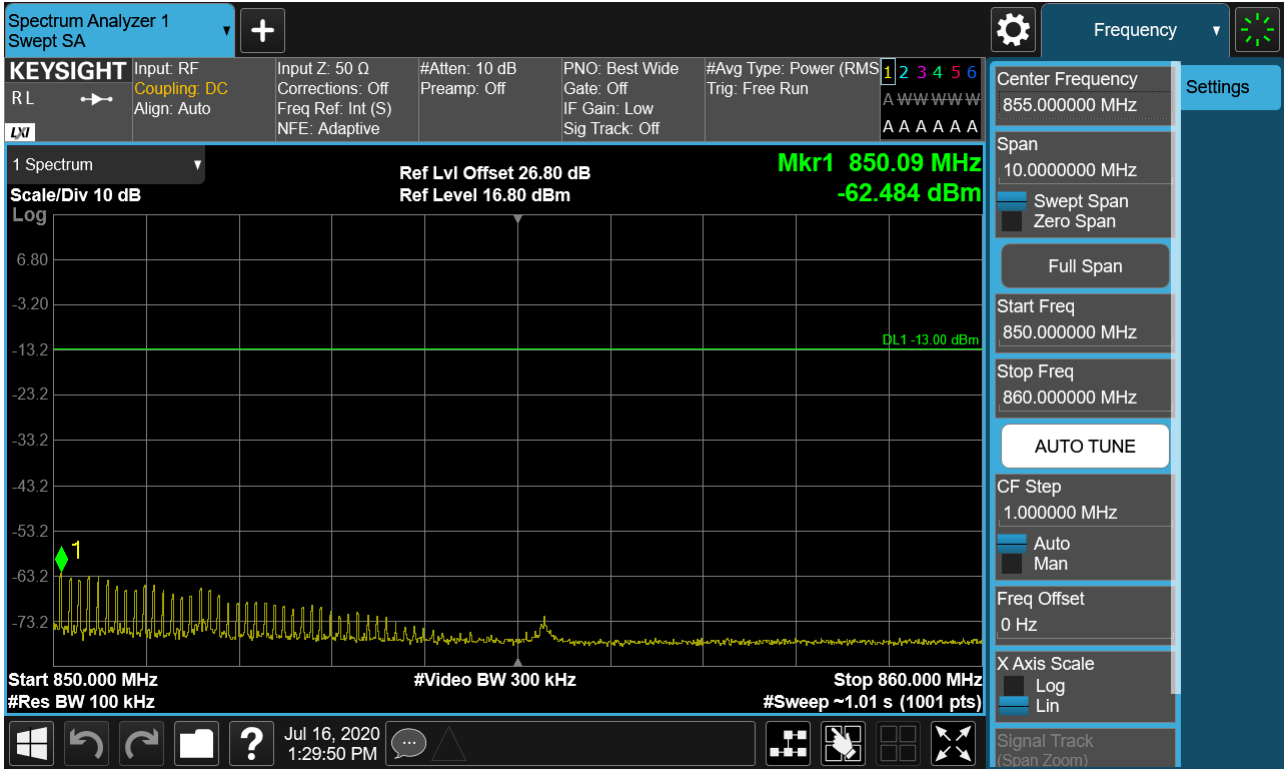


PCC 5MHz Ch20528 RB1 Offset24 SCC 10MHz Ch20600 RB1 Offset0(1)

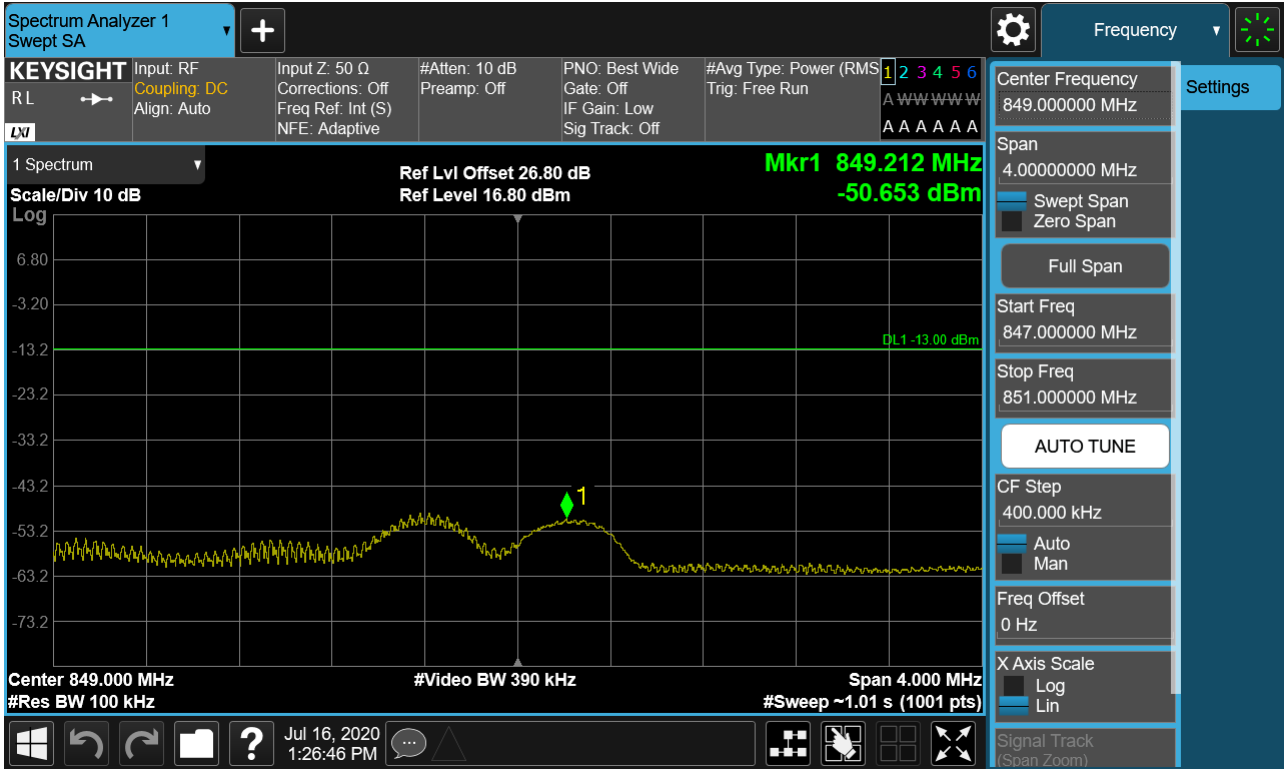


PCC 5MHz Ch20528 RB1 Offset24 SCC 10MHz Ch20600 RB1 Offset0(2)



PCC 10MHz Ch20501 RB50 Offset0 SCC 10MHz Ch20600 RB50 Offset0(1)

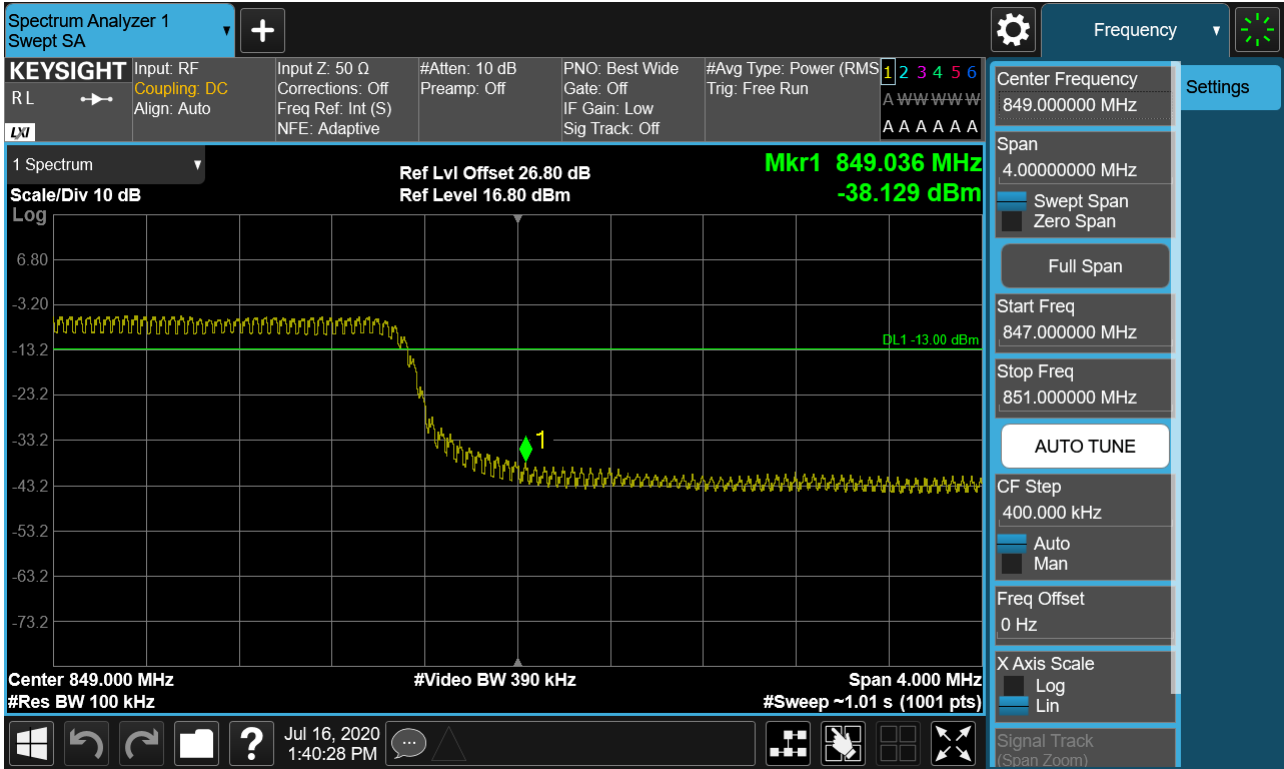

PCC 10MHz Ch20501 RB50 Offset0 SCC 10MHz Ch20600 RB50 Offset0(2)

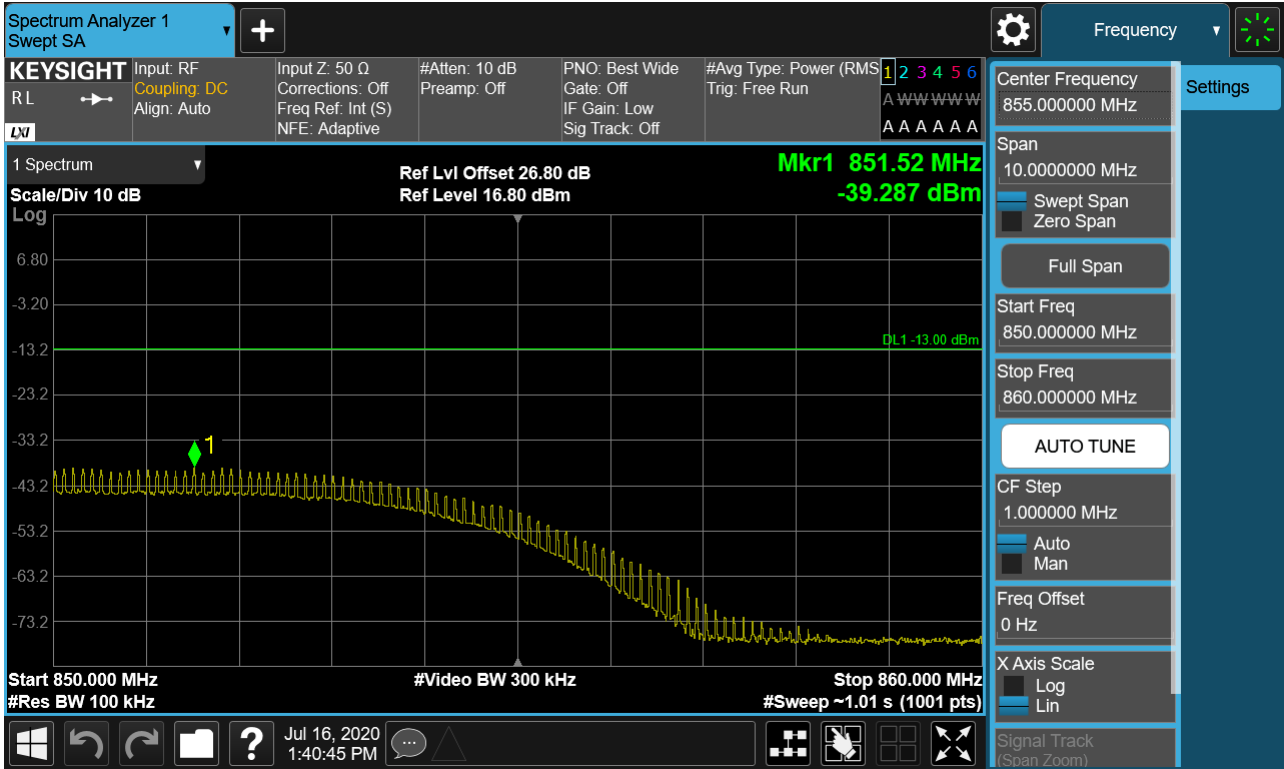

8.5 Frequency Stability / Variation Of Ambient Temperature

- ▣ PCC Channel: 20501
- ▣ PCC Frequency: 834.1 MHz
- ▣ PCC BandWidth: 3 MHz
- ▣ SCC Channel: 20540
- ▣ SCC Frequency: 838.0 MHz
- ▣ SCC BandWidth: 5 MHz
- ▣ Voltage : 3.850 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.850	+20(Ref)	0.033	0.029	834.10003	838.00002
100%		-30	-0.041	0.032	834.09997	838.00003
100%		-20	0.035	0.023	834.10003	838.00002
100%		-10	-0.031	0.031	834.09997	838.00003
100%		0	-0.035	0.034	834.09997	838.00003
100%		10	-0.027	0.024	834.09998	838.00002
100%		30	-0.028	0.036	834.09998	838.00003
100%		40	0.043	0.043	834.10004	838.00004
100%		50	0.024	-0.033	834.10002	837.99997
Batt. Endpoint		3.400	20	0.027	0.034	834.10002

- PCC Channel: 20510
- PCC Frequency: 835.0 MHz
- PCC BandWidth: 5 MHz
- SCC Channel: 20549
- SCC Frequency: 838.9 MHz
- SCC BandWidth: 3 MHz
- Voltage : 3.850 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.850	+20(Ref)	0.039	0.025	835.00003	838.90002
100%		-30	0.038	0.029	835.00003	838.90002
100%		-20	0.026	-0.035	835.00002	838.89997
100%		-10	0.035	0.034	835.00003	838.90003
100%		0	-0.035	-0.043	834.99997	838.89996
100%		10	-0.042	0.025	834.99996	838.90002
100%		30	0.041	-0.038	835.00003	838.89997
100%		40	-0.034	0.025	834.99997	838.90002
100%		50	0.030	0.040	835.00003	838.90003
Batt. Endpoint	3.400	20	0.037	0.037	835.00003	838.90003

- PCC Channel: 20478
- PCC Frequency: 831.8 MHz
- PCC BandWidth: 5 MHz
- SCC Channel: 20550
- SCC Frequency: 839.0 MHz
- SCC BandWidth: 10 MHz
- Voltage : 3.850 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.850	+20(Ref)	0.034	-0.038	831.80003	838.99997
100%		-30	0.034	0.032	831.80003	839.00003
100%		-20	-0.029	0.023	831.79998	839.00002
100%		-10	-0.025	0.037	831.79998	839.00003
100%		0	0.023	-0.042	831.80002	838.99996
100%		10	0.033	0.035	831.80003	839.00003
100%		30	-0.042	0.033	831.79997	839.00003
100%		40	0.033	0.039	831.80003	839.00003
100%		50	0.040	-0.040	831.80003	838.99997
Batt. Endpoint	3.400	20	0.025	0.027	831.80002	839.00002

- PCC Channel: 20500
- PCC Frequency: 834.0 MHz
- PCC BandWidth: 10 MHz
- SCC Channel: 20572
- SCC Frequency: 841.2 MHz
- SCC BandWidth: 5 MHz
- Voltage : 3.850 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.850	+20(Ref)	0.024	-0.026	834.00002	841.19998
100%		-30	0.037	0.026	834.00003	841.20002
100%		-20	-0.029	-0.026	833.99998	841.19998
100%		-10	0.030	-0.029	834.00002	841.19998
100%		0	0.033	0.042	834.00003	841.20004
100%		10	0.042	0.023	834.00003	841.20002
100%		30	0.040	0.040	834.00003	841.20003
100%		40	0.035	0.023	834.00003	841.20002
100%		50	0.024	0.036	834.00002	841.20003
Batt. Endpoint		3.400	20	0.042	0.043	834.00004

- PCC Channel: 20476
- PCC Frequency: 831.6 MHz
- PCC BandWidth: 10 MHz
- SCC Channel: 20575
- SCC Frequency: 841.5 MHz
- SCC BandWidth: 10 MHz
- Voltage : 3.850 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100%	3.850	+20(Ref)	0.037	0.024	831.60003	841.50002
100%		-30	0.037	0.030	831.60003	841.50003
100%		-20	0.027	0.033	831.60002	841.50003
100%		-10	0.033	-0.040	831.60003	841.49997
100%		0	0.036	0.030	831.60003	841.50003
100%		10	0.042	-0.033	831.60004	841.49997
100%		30	0.038	0.038	831.60003	841.50003
100%		40	0.033	0.031	831.60003	841.50003
100%		50	0.027	0.039	831.60002	841.50003
Batt. Endpoint		3.400	20	0.042	-0.041	831.60004

8.6 Radiated Spurious Emissions

- ▣ PCC Channel : 20416 (825.6MHz)
- ▣ PCC BW(MHz) : 3
- ▣ PCC RB/ RB Offset : 1/ 14
- ▣ SCC Channel : 20455 (829.5MHz)
- ▣ SCC BW(MHz) : 5
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: -13.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
1,652.80	-48.71	9.50	-59.47	1.84	H	-51.81
2,479.20	-55.09	10.60	-59.90	2.30	H	-51.60
3,305.60	-57.15	12.33	-59.14	2.69	H	-49.50

- ▣ PCC Channel : 20478 (831.8MHz)
- ▣ PCC BW(MHz) : 5
- ▣ PCC RB/ RB Offset : 1/ 24
- ▣ SCC Channel : 20550 (839.0MHz)
- ▣ SCC BW(MHz) : 10
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: -13.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
1,673.20	-45.23	9.65	-55.99	1.86	H	-48.20
2,509.80	-54.92	10.75	-60.03	2.32	H	-51.60
3,346.40	-57.82	12.48	-59.47	2.70	H	-49.70

- ▣ PCC Channel : 20528 (836.8MHz)
- ▣ PCC BW(MHz) : 5
- ▣ PCC RB/ RB Offset : 1/ 24
- ▣ SCC Channel : 20600 (844.0MHz)
- ▣ SCC BW(MHz) : 10
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: -13.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
1,693.20	-47.61	9.73	-58.23	1.87	H	-50.37
2,539.80	-56.16	10.85	-60.02	2.32	H	-51.49
3,386.40	-56.76	12.63	-58.76	2.72	V	-48.85

8.7 Occupied Bandwidth

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
3	20501	834.1	QPSK	15/ 0	5	20540	838.0	QPSK	25/ 0	7.4234
5	20510	835.0	QPSK	25/ 0	3	20549	838.9	QPSK	15/ 0	7.4705
5	20478	831.8	QPSK	25/ 0	10	20550	839.0	QPSK	50/ 0	13.828
10	20500	834.0	QPSK	50/ 0	5	20572	841.2	QPSK	25/ 0	13.865
10	20476	831.6	QPSK	50/ 0	10	20575	841.5	QPSK	50/ 0	18.690

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
3	20501	834.1	16QAM	15/ 0	20	40645	2595.5	16QAM	25/ 0	7.4261
5	20510	835.0	16QAM	25/ 0	15	40669	2597.9	16QAM	15/ 0	7.4606
5	20478	831.8	16QAM	25/ 0	20	40670	2598	16QAM	50/ 0	13.805
10	20500	834.0	16QAM	50/ 0	10	40691	2600.1	16QAM	25/ 0	13.852
10	20476	831.6	16QAM	50/ 0	15	40695	2600.5	16QAM	50/ 0	18.709


PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
3	20501	834.1	64QAM	15/ 0	5	20540	838.0	64QAM	25/ 0	7.4237
5	20510	835.0	64QAM	25/ 0	3	20549	838.9	64QAM	15/ 0	7.4866
5	20478	831.8	64QAM	25/ 0	10	20550	839.0	64QAM	50/ 0	13.845
10	20500	834.0	64QAM	50/ 0	5	20572	841.2	64QAM	25/ 0	13.850
10	20476	831.6	64QAM	50/ 0	10	20575	841.5	64QAM	50/ 0	18.754

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
3	20501	834.1	256QAM	15/ 0	5	20540	838.0	256QAM	25/ 0	7.4760
5	20510	835.0	256QAM	25/ 0	3	20549	838.9	256QAM	15/ 0	7.4826
5	20478	831.8	256QAM	25/ 0	10	20550	839.0	256QAM	50/ 0	13.870
10	20500	834.0	256QAM	50/ 0	5	20572	841.2	256QAM	25/ 0	13.920
10	20476	831.6	256QAM	50/ 0	10	20575	841.5	256QAM	50/ 0	18.696


Note:

In order to simplify the report, attached plots were only Max.Bandwidth(10+10)


PCC 10MHz Ch20476 RB50 Offset0, SCC 10MHz Ch20575 RB50 Offset0_(QPSK)

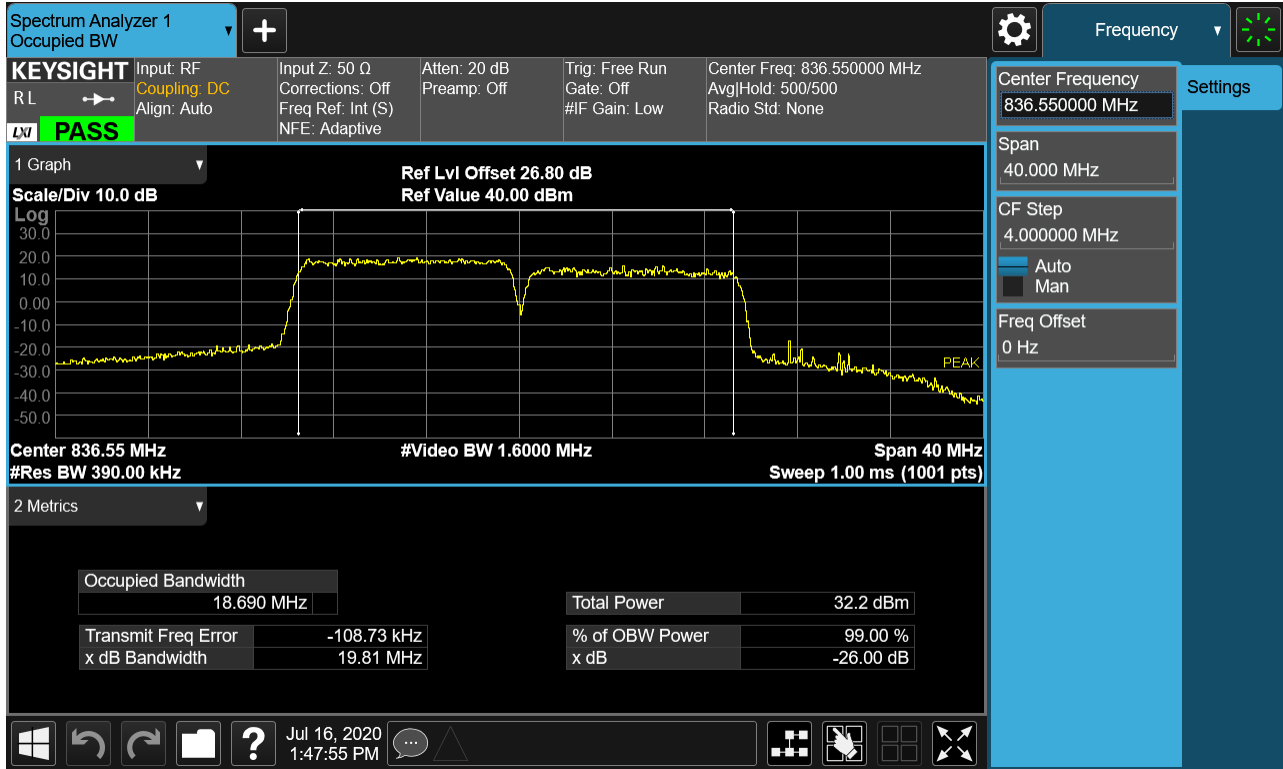


PCC 10MHz Ch20476 RB50 Offset0, SCC 10MHz Ch20575 RB50 Offset0_(16QAM)

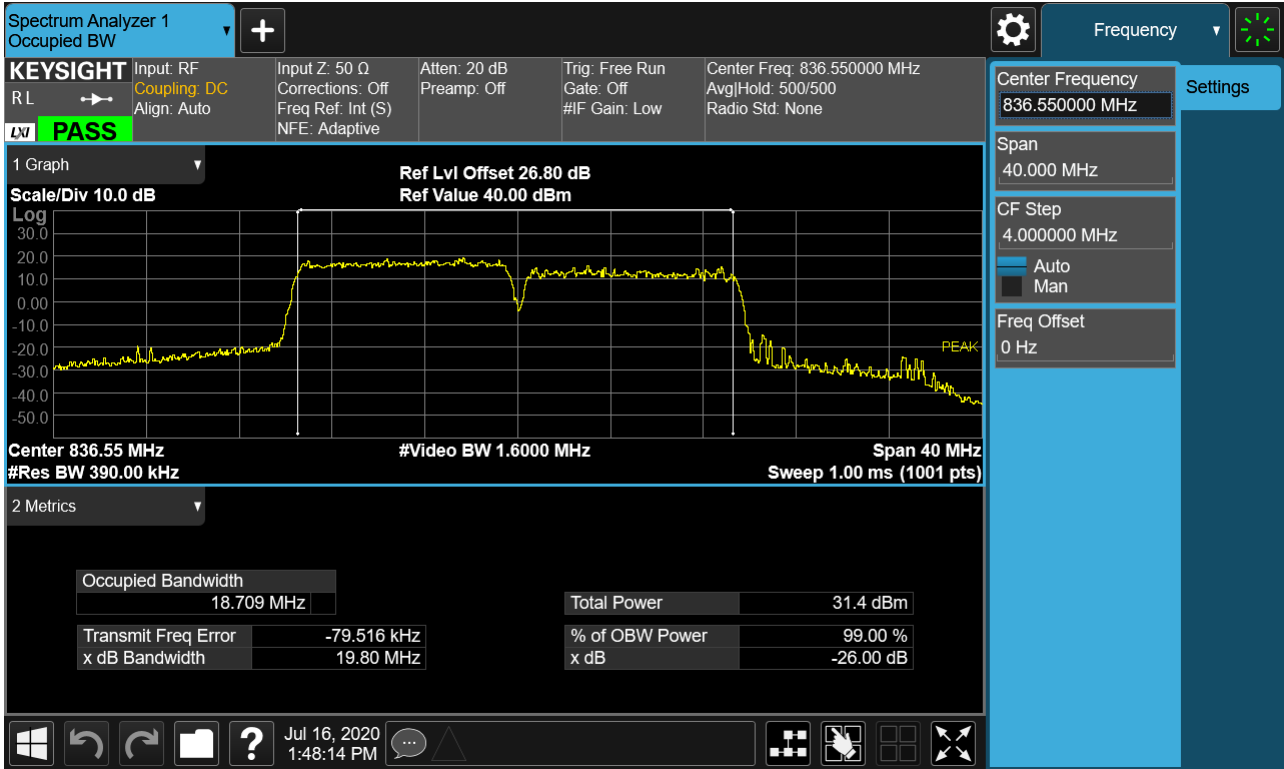

PCC 10MHz Ch20476 RB50 Offset0, SCC 10MHz Ch20575 RB50 Offset0_(64QAM)

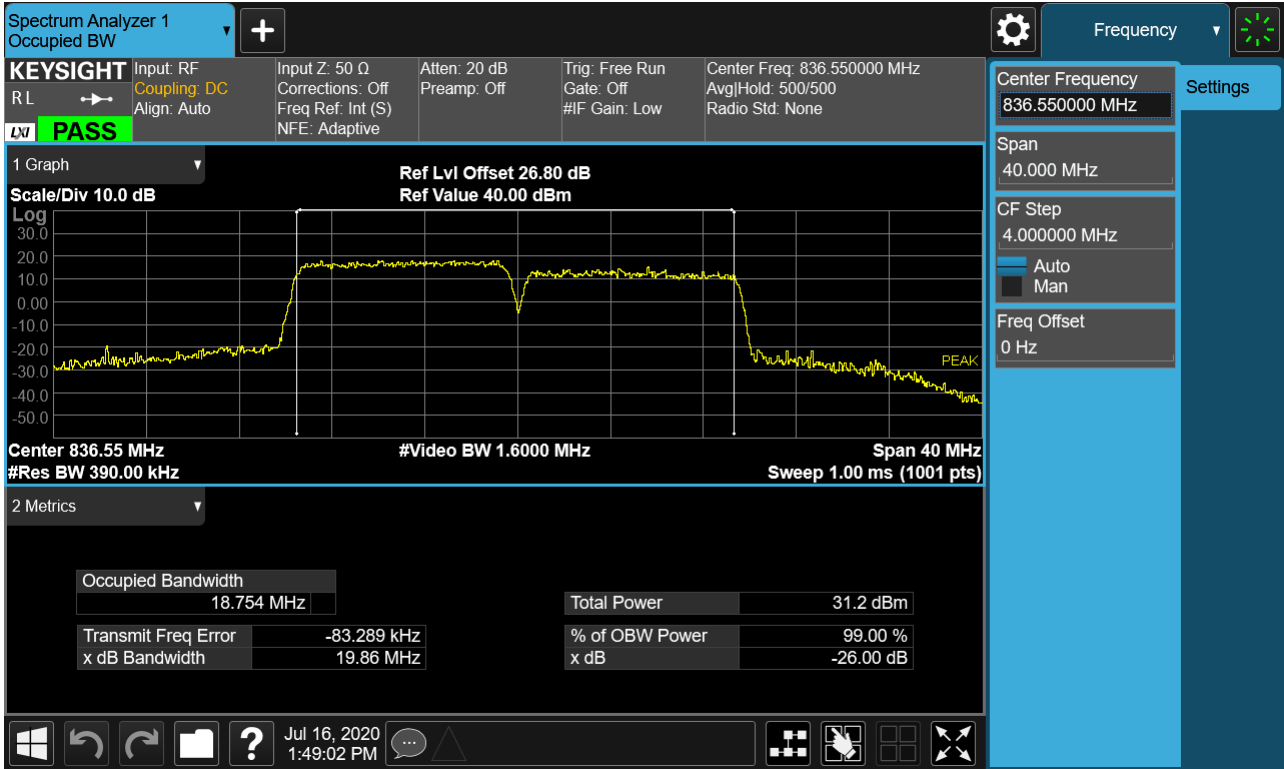

PCC 10MHz Ch20476 RB50 Offset0, SCC 10MHz Ch20575 RB50 Offset0_(256QAM)

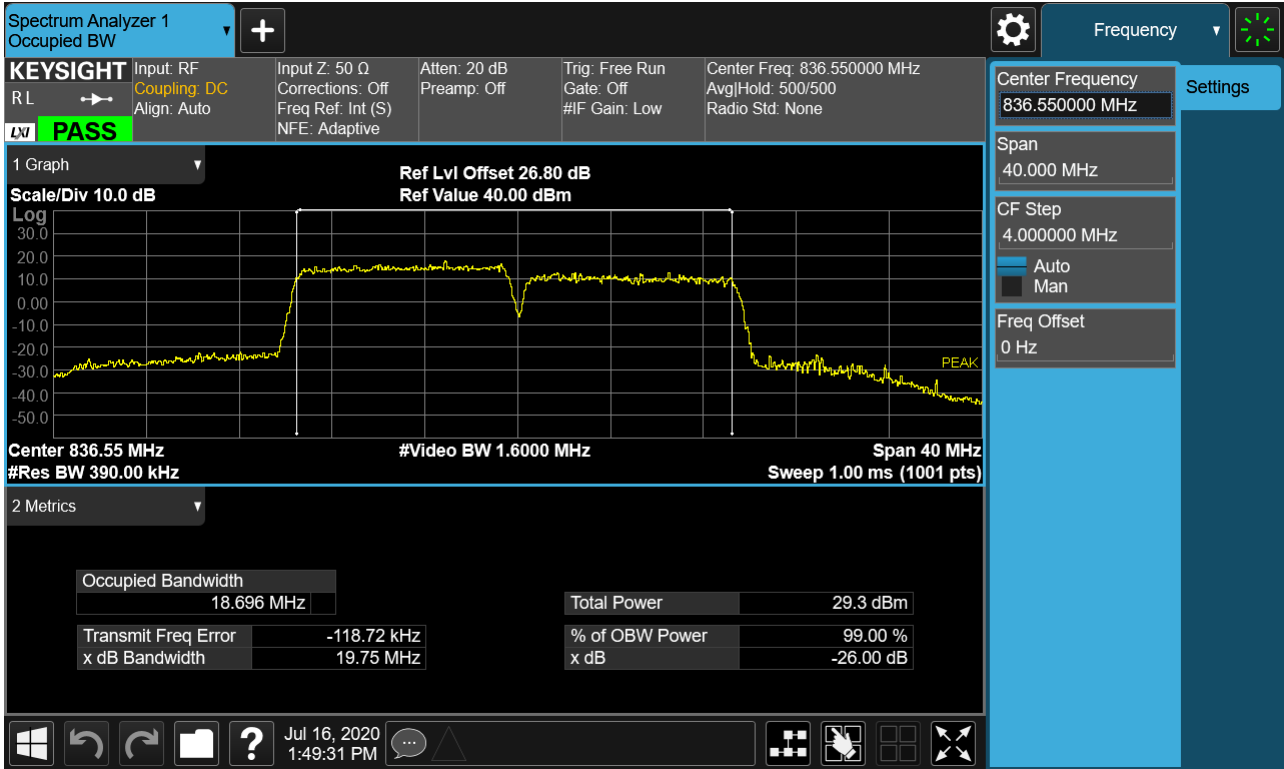

9. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2007-FC040-P