

RF Test Report

2.4 GHz WLAN 802.11ax OFDMA

Report No. : RF200511K004-3 R2
Customer : Samsung Electronics Co., Ltd.
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do,
16677, Korea
Use of Report : Certification
Model Name : SM-T970
FCC ID / IC : A3LSMT970 / 649E-SMT970
Date of Test : 2020.06.01 to 2020.07.15
Test Method Used : FCC 47 CFR PART 15 Subpart C (Section §15.247) /
ISED RSS-247
Testing Environment : Refer to the Test Condition

Test Result : Pass Fail

ISSUED BY: BV CPS ADT Korea Ltd., EMC/RF Laboratory

ADDRESS: Innoplex No.2 106, Sinwon-ro 306, Yeongtong-gu,
Suwon-si, Gyeonggi-do, Korea 16675

TEST LOCATION: HeungAn-daero 49, DongAn-gu, Anyang-si,
Gyeonggi-do, Korea, 14119

Tested by

Name : Donghwa Shin

Technical Manager

Name : Jongha Choi

(Signature)


(Signature)


2020. 07. 16

BV CPS ADT Korea Ltd.

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

RELEASE CONTROL RECORD

REPORT NO.	REASON FOR CHANGE	DATE ISSUED
RF200511K004-3	Original release	2020.07.01
RF200511K004-3 R1	Corrected the regarding distance extrapolation factor and added statement regarding the worst case of band edge	2020.07.15
RF200511K004-3 R2	Added data converted to magnetic field strength	2020.07.16

Table of Contents

RELEASE CONTROL RECORD	2
1 SUMMARY OF TEST RESULTS.....	5
1.1 INTRODUCTION OF TEST DATA REUSE.....	6
1.2 DIFFERENCE.....	6
1.3 SPOT CHECK VERIFICATION RESULTS.....	6
1.4 REFERENCE DETAILS	6
1.5 MEASUREMENT UNCERTAINTY	7
2 GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODE	11
2.2.1 <i>Test Mode Applicability and Tested Channel Details</i>	11
2.3 MAXIMUM OUTPUT POWER.....	13
2.4 DUTY CYCLE OF TEST SIGNAL	13
2.5 99 % BANDWIDTH	16
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	20
2.7 TEST EQUIPMENT	20
3 TEST RESULTS	21
3.1 ANTENNA REQUIREMENT	21
3.2 6 dB BANDWIDTH	22
3.2.1 <i>Regulation</i>	22
3.2.2 <i>Test Procedure</i>	22
3.2.3 <i>Deviation from Test Standard</i>	22
3.2.4 <i>Test Setup</i>	22
3.2.5 <i>Test Result</i>	23
3.3 MAXIMUM PEAK OUTPUT POWER.....	28
3.3.1 <i>Regulation</i>	28
3.3.2 <i>Test Procedure</i>	28
3.3.3 <i>Deviation from Test Standard</i>	29
3.3.4 <i>Test Setup</i>	29
3.3.5 <i>Test Result</i>	30
3.4 POWER SPECTRAL DENSITY	38
3.4.1 <i>Regulation</i>	38
3.4.2 <i>Test Procedure</i>	38
3.4.3 <i>Deviation from Test Standard</i>	38

3.4.4	<i>Test Setup</i>	38
3.4.5	<i>Test Result</i>	39
3.5	SPURIOUS EMISSION, BAND EDGE AND RESTRICTED BANDS.....	62
3.5.1	<i>Regulation</i>	62
3.5.2	<i>Test Procedure</i>	63
3.5.3	<i>Deviation from Test Standard</i>	67
3.5.4	<i>Test Setup</i>	67
3.5.5	<i>Test Result of Radiated Spurious Emission</i>	70
3.5.6	<i>Test Result of Conducted Spurious Emission</i>	98
3.6	AC CONDUCTED EMISSIONS (150 KHZ TO 30 MHZ).....	104
3.6.1	<i>Regulation</i>	104
3.6.2	<i>Test Procedure</i>	104
3.6.3	<i>Deviation from Test Standard</i>	104
3.6.4	<i>Test Setup</i>	105
3.6.5	<i>Test Result</i>	105
APPENDIX – INFORMATION OF THE TESTING LABORATORIES		106

1 Summary of Test Results

The EUT has been tested according to the following specifications

Applied Standard : FCC Part 15, Subpart C 15.247, RSS-247					
FCC Part Section(s)	RSS Section(s)	Test Description	Limit	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6 dB Bandwidth	> 500 kHz	PASS	Section 3.2
-	-	Occupied Bandwidth (99 % Bandwidth)	N/A	PASS	Section 2.5
15.247(b)(3)	RSS-247 [5.4(4)]	Maximum Conducted Output Power	< 1 Watt	PASS	Section 3.3
15.247(e)	RSS-247 [5.2]	Power Spectral Density	< 8 dBm / 3 kHz Band	PASS	Section 3.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions (Conducted Spurious Emission)	≥ 30 dBc	PASS	Section 3.5
15.205 15.209	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in Restricted bands must meet the radiated limits detailed in 15.209 (RSS-247 limits)	PASS	Section 3.5
15.207	RSS-Gen [8.8]	AC Conducted Emissions (150 kHz – 30 MHz)	< FCC 15.207 limits (RSS-Gen [8.8] limits)	PASS	Section 3.6

NOTES

- 1) The general test methods used to test on this devices are ANSI C63.10.
- 2) Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

1.1 Introduction of Test Data Reuse

This report referenced from the FCC ID : A3LSMT975 and the applicant takes full responsibility that test data as referenced in this report represent compliance for this FCC ID.

1.2 Difference

The FCC ID : A3LSMT970 shared the same enclosure and circuit board as FCC ID: A3LSMT975. The WLAN/BT antennas and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary radiated emission that the performance of the FCC ID: A3LSMT975 remains representative of FCC ID : A3LSMT970. The test data of FCC ID: A3LSMT975 being submitted for this application to cover the feature.

1.3 Spot Check Verification Results

Frequency Band	Test Item	Test Mode	Measured Frequency (MHz)	Original Model	Spot Check Model	Limit [dBuV/m]	Deviation (dB)	Remark
				SM-T975	SM-T970			
				FCC ID :A3LSMT975	FCC ID :A3LSMT970			
DTS WLAN 802.11 ax (2.4 GHz)	Band Edge	MIMO_802.11ax(HE20)_2462	2 462	44.30 dBuV/m	41.90 dBuV/m	54.00	-2.40	
	RSE	MIMO_802.11ax(HE20)_2462	2 462	36.69 dBuV/m	36.38 dBuV/m	74.00	-0.31	2nd Harmonic

Comparison result of two models, upper deviation is within 3 dB and all test results are under FCC Technical Limits.

1.4 Reference Details

Equipment Class	Reference FCC ID (Parent)	Application Type	Reference Test report number	Exhibit Type	Variant Test Report Number	Data Re-used
DTS	A3LSMT975	Original Grant	RF200522K003-2 (802.11b/g/n/ac)	Test Report	RF200511K004-2 (802.11b/g/n/ac)	All
			RF200522K003-3 (802.11ax)	Test Report	RF200511K004-3 (802.11ax)	All
			RF200522K003-1 Bluetooth LE	Test Report	RF200511K004-1 Bluetooth LE	All
DSS	A3LSMT975	Original Grant	RF200522K003 (Bluetooth)	Test Report	RF200511K004 (Bluetooth)	All
NII	A3LSMT975	Original Grant	RF200522K003-6 (802.11a/n/ac)	Test Report	RF200511K004-5 (802.11a/n/ac)	All
			RF200522K003-7 (802.11ax)	Test Report	RF200511K004-6 (802.11ax)	All
DCD	A3LSMT975	Original Grant	RF200522K003-4 (WPT)	Test Report	RF200511K004-4 (WPT)	All

1.5 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2

Measurement Items	Frequency Range	Expanded Uncertainty $U = kU_c (k = 2)$
Conducted Emissions at main ports	150 kHz – 30 MHz	2.62
Radiated Spurious Emissions	9 kHz – 30 MHz	1.97
	30 MHz – 1 GHz	4.04
	1 GHz – 18 GHz	5.38
	18 GHz – 26.5 GHz	5.46

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of $k = 2$.

2 General Information

2.1 General Description of EUT

Product	Tablet
Brand	Samsung
Model	SM-T970
Identification No. of EUT	-
Series Model	-
Model Difference	-
Power Supply	3.86 V DC By Battery / DC 5/9 V By Adapter
Modulation Type	OFDM
Transfer Rate	MCS0 to MCS9 (802.11ax HE20)
Operating Frequency	2 412 to 2 472 MHz
Number of Channel	13 Channels
Output Power	17.97 dBm
Antenna Type	Metal Antenna
Antenna Connector	C-clip
H/W Version	REV0.4
S/W Version	T970.001

NOTES

- 1) The above equipment has been tested by **Bureau Veritas Consumer Products Services ADT Korea**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.
- 2) The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Frequency Range	Test Mode	Antenna 1	Antenna 2
2.4 GHz DTS Band (2 400 to 2 483.5 MHz)	802.11ax(HE20)_SISO	-	TX/RX
	802.11ax(HE20)_MIMO	TX/RX	TX/RX

3) The following antennas were provided to the EUT


Antenna	Type	Connector	Peak Gain (dBi)				
			2.4 GHz	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
Antenna 1	Metal Antenna	Internal	-5.71	-8.45	-6.15	-6.05	-8.65
Antenna 2	Metal Antenna	Internal	-6.52	-8.84	-8.46	-8.57	-7.70

4) Spurious emission of the simultaneous operation RSDB mode and the test data please refer to report no. RF200522K003-6 (U-NII Test Report).

5) List of Accessories

Accessories	Brand	Model	Manufacturer	Specification
Ear phone	Samsung	EHS64	Samsung	3.5 mm
S-pen	Samsung	EJ-PT870	Samsung	Bluetooth
Keyboard	Samsung	EF-DT970	Samsung	N/A
TA	Samsung	EP-TA200	Samsung	Input : AC 100-240 V, 50 – 60 Hz, 0.5 A Output : DC 9.0 V, 1.67 A, DC5.0 V, 2.0 A
Cable	Samsung	EP-DG930M	Samsung	A to C type, Shielded, 1.m
Battery	Samsung	EB-BT975ABY	Samsung	Rating: 3.86Vdc, 9800mAh, 37.83Wh

6) 802.11ax RU Allocations

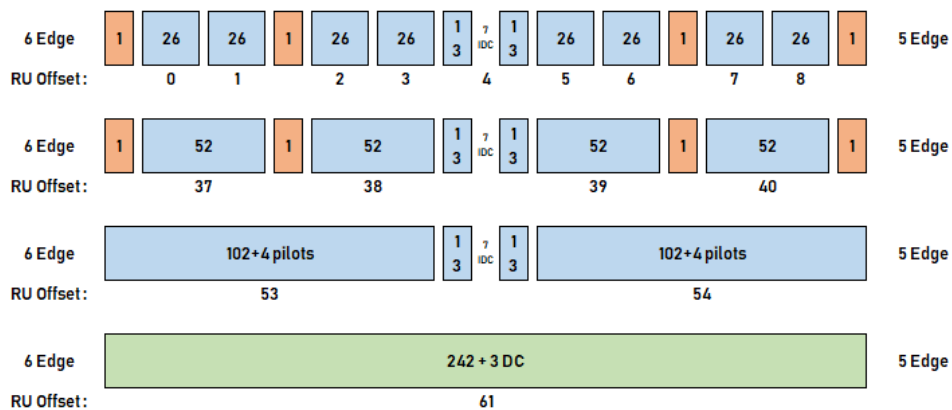

802.11ax(HE20)

7) Test RU offset for tones

Mode	Tones number in RU	RU offset
HE20	26T	0
		4
		8
	52T	37
		38
		40
	106T	53
		54
	242T / SU	61 / -

2.2 Description of Test Mode

[Test Channel of EUT]

- 2.4 GHz DTS 802.11b/g/n/ac/ax (20 MHz BW)

Channel	Frequency [MHz]	Channel	Frequency [MHz]
1	2 412	8	2 447
2	2 417	9	2 452
3	2 422	10	2 457
4	2 427	11	2 462
5	2 432	12	2 467
6	2 437	13	2 472
7	2 442		

2.2.1 Test Mode Applicability and Tested Channel Details

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X axis for radiated emission. Following channel(s) was(were) selected for the final test as listed below :

EUT Configure mode	Applicable to				Description
	RE < 1G	RE ≥ 1G	PLC	APCM	
-	√	√	√	√	-

Where RE ≥ 1 G : Radiated Emission above 1 GHz & Bandedge Measurement
 RE < 1 G : Radiated Emission below 1 GHz
 PLC : Power Line Conducted Emission
 APCM : Antenna Port Conducted Measurement

Radiated Emission Test (Below 1 GHz)

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and data rate.
- Following channel(s) was (were) selected for the final test as listed below.

Antenna	EUT mode	Available Channel	Tested Channel	Modulation Type	Data Rate
SISO_ANT2	802.11ax(HE20)	1 to 13	1	OFDMA	MCS0
MIMO	802.11ax(HE20)	1 to 13	1	OFDMA	MCS0

Radiated Emission Test (Above 1 GHz)

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and data rate.
- Following channel(s) was (were) selected for the final test as listed below.
- For the band edge test, it was tested at SU mode which is worst case.

Antenna	EUT mode	Available Channel	Tested Channel	Modulation Type	Data Rate
SISO_ANT2	802.11ax(HE20)	1 to 13	1, 2, 6, 10, 11, 12, 13	OFDMA	MCS0
MIMO	802.11ax(HE20)	1 to 13	1, 2, 6, 10, 11, 12, 13	OFDMA	MCS0

Power line Conducted Emission Test

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and data rate.
- Following channel(s) was (were) selected for the final test as listed below.

Antenna	EUT mode	Available Channel	Tested Channel	Modulation Type	Data Rate
-	-	-	-	-	-

Antenna Port Conducted Measurement

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and data rate.
- Following channel(s) was (were) selected for the final test as listed below.
- For the band edge test, it was tested at SU mode which is worst case.

Antenna	EUT mode	Available Channel	Tested Channel	Modulation Type	Data Rate
SISO_ANT2	802.11ax(HE20)	1 to 13	1, 2, 6, 10, 11, 12, 13	OFDMA	MCS0
MIMO	802.11ax(HE20)	1 to 13	1, 2, 6, 10, 11, 12, 13	OFDMA	MCS0

Test Condition

Applicable to	Environmental Conditions	Test Voltage	Tested by
RE < 1G	22 °C, 55 % RH	DC 5/9 V By Adaptor	Donghwa Shin
RE ≥ 1G	22 °C, 55 % RH	DC 5/9 V By Adaptor	Donghwa Shin
PLC	23 °C, 49 % RH	DC 5/9 V By Adaptor	Donghwa Shin
APCM	22 °C, 51 % RH	DC 5/9 V By Adaptor	Donghwa Shin

2.3 Maximum Output Power


Frequency Range [MHz]	Test Mode	Output Power [dBm]		Output Power [mW]	
		ANT1	ANT2	ANT1	ANT2
2 412 - 2 472	802.11ax HE20 SISO	-	14.97	-	31.41
	802.11ax HE20 MIMO	17.97		62.67	


2.4 Duty Cycle of Test Signal

Mode	Antenna	Tone	On Time B [msec]	Period [msec]	Duty Cycle X [Linear]	Duty Cycle [%]	DCCF [dB]	1/T Min. VBW [kHz]
802.11ax HE20	SISO	26T	5.09	5.11	0.997	99.65	0.00	0.197
		52T	5.08	5.09	0.997	99.66	0.00	0.197
		106T	4.77	4.78	0.997	99.65	0.00	0.210
		242T/SU	4.67	4.69	0.996	99.65	0.00	0.214
	MIMO	26T	2.60	2.61	0.993	99.34	0.00	0.385
		52T	2.59	2.61	0.993	99.32	0.00	0.386
		106T	2.44	2.45	0.993	99.32	0.00	0.411
		242T/SU	2.39	2.40	0.993	99.31	0.00	0.419



[Test Plot of Duty Cycle]

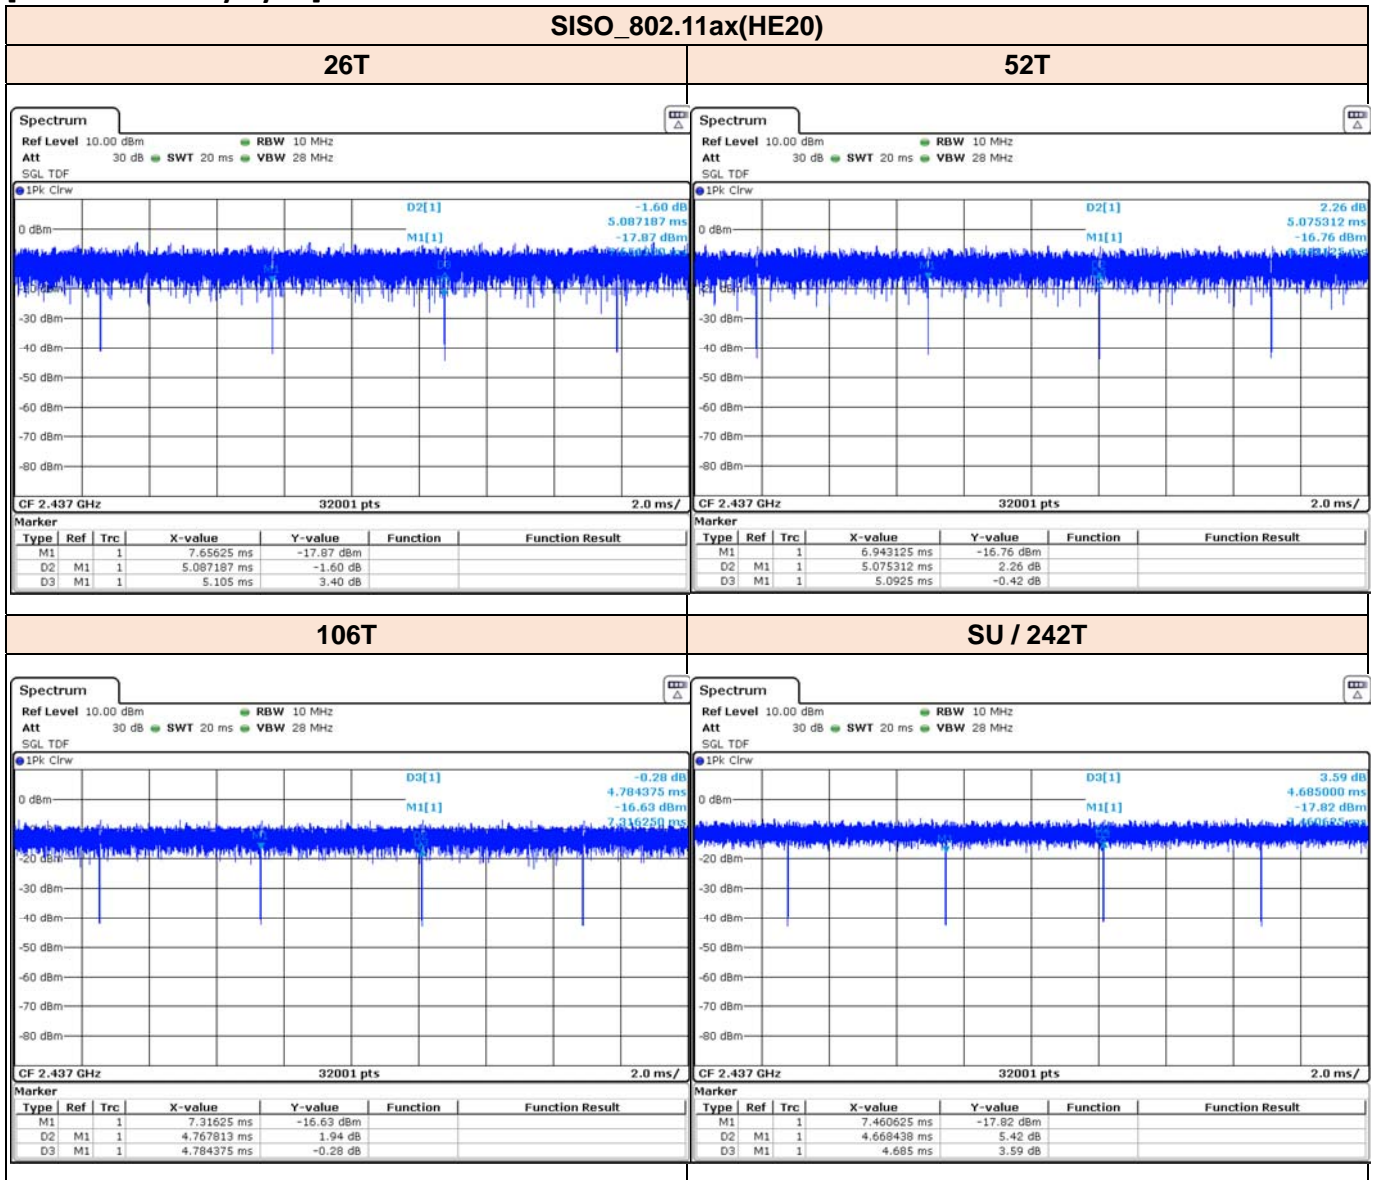

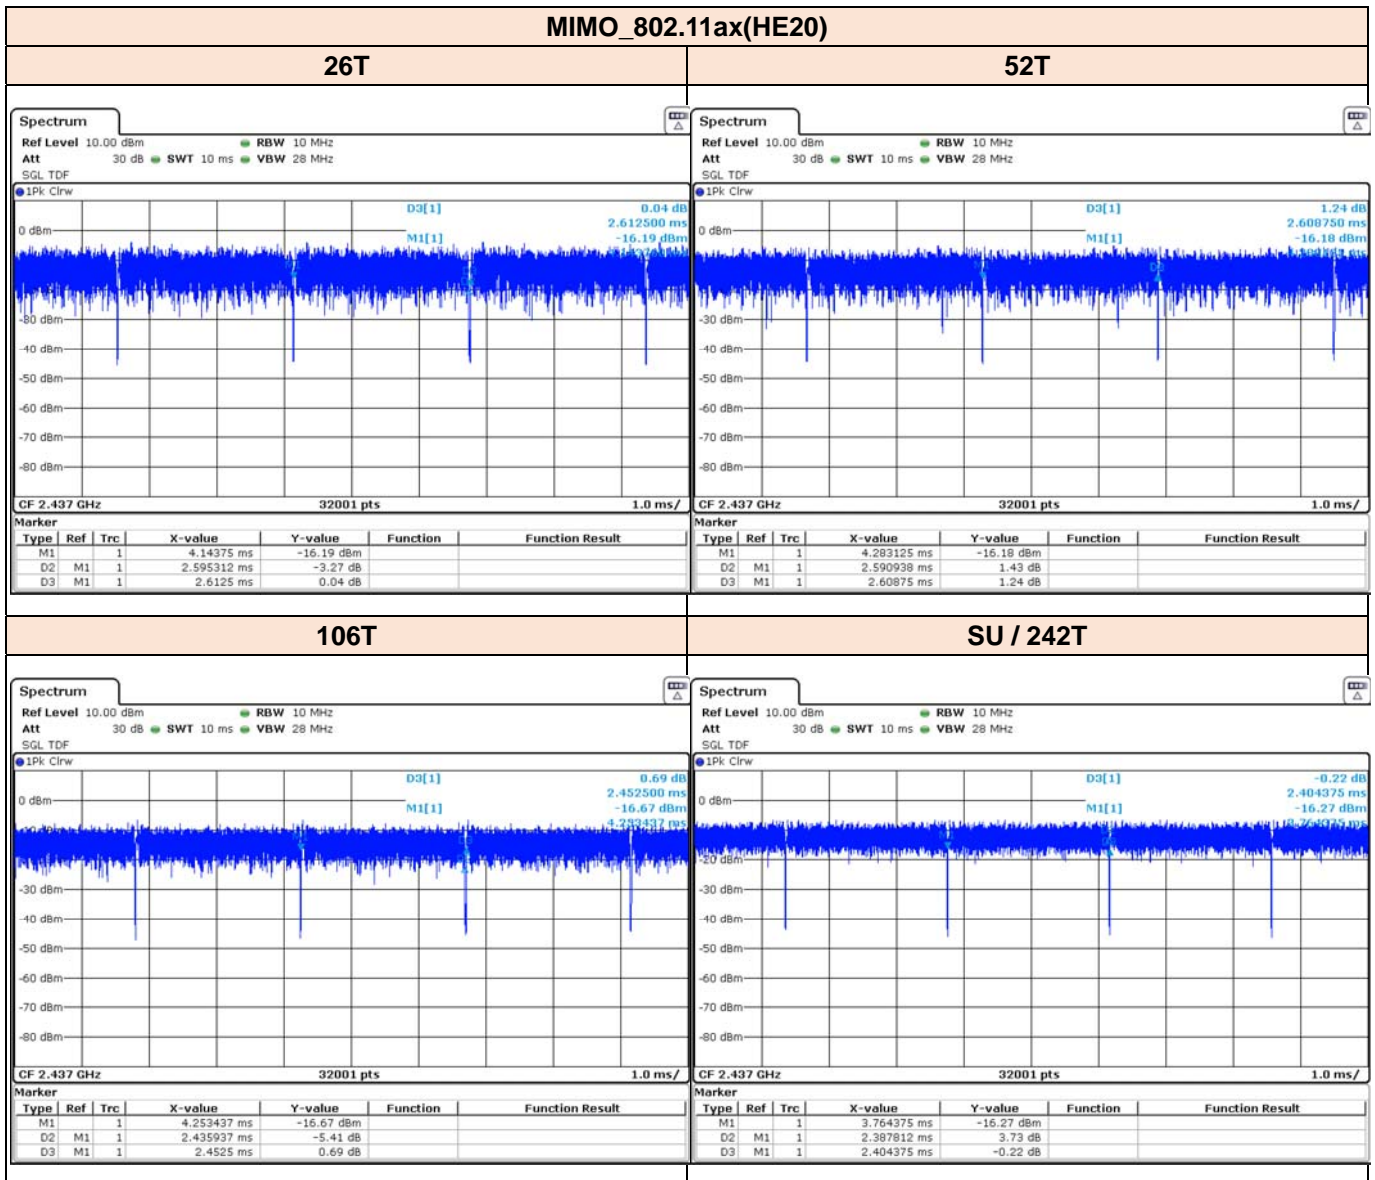




2.5 99 % Bandwidth

[Test Data of 99 % Bandwidth]


Test Mode	Channel	Frequency [MHz]	Tones	RU Offest	Test Result	
					ANT1	ANT2
802.11ax HE20	1	2 412	-	242T/SU	18.941	18.971
	2	2 417		242T/SU	18.941	18.971
	6	2 437		242T/SU	18.941	18.941
	10	2 457		242T/SU	18.911	18.971
	11	2 462		242T/SU	18.881	19.001
	12	2 467		242T/SU	18.911	18.971
	13	2 472		242T/SU	18.911	19.001
Worst Result					18.881	18.941

Test Plot of 99 % Bandwidth

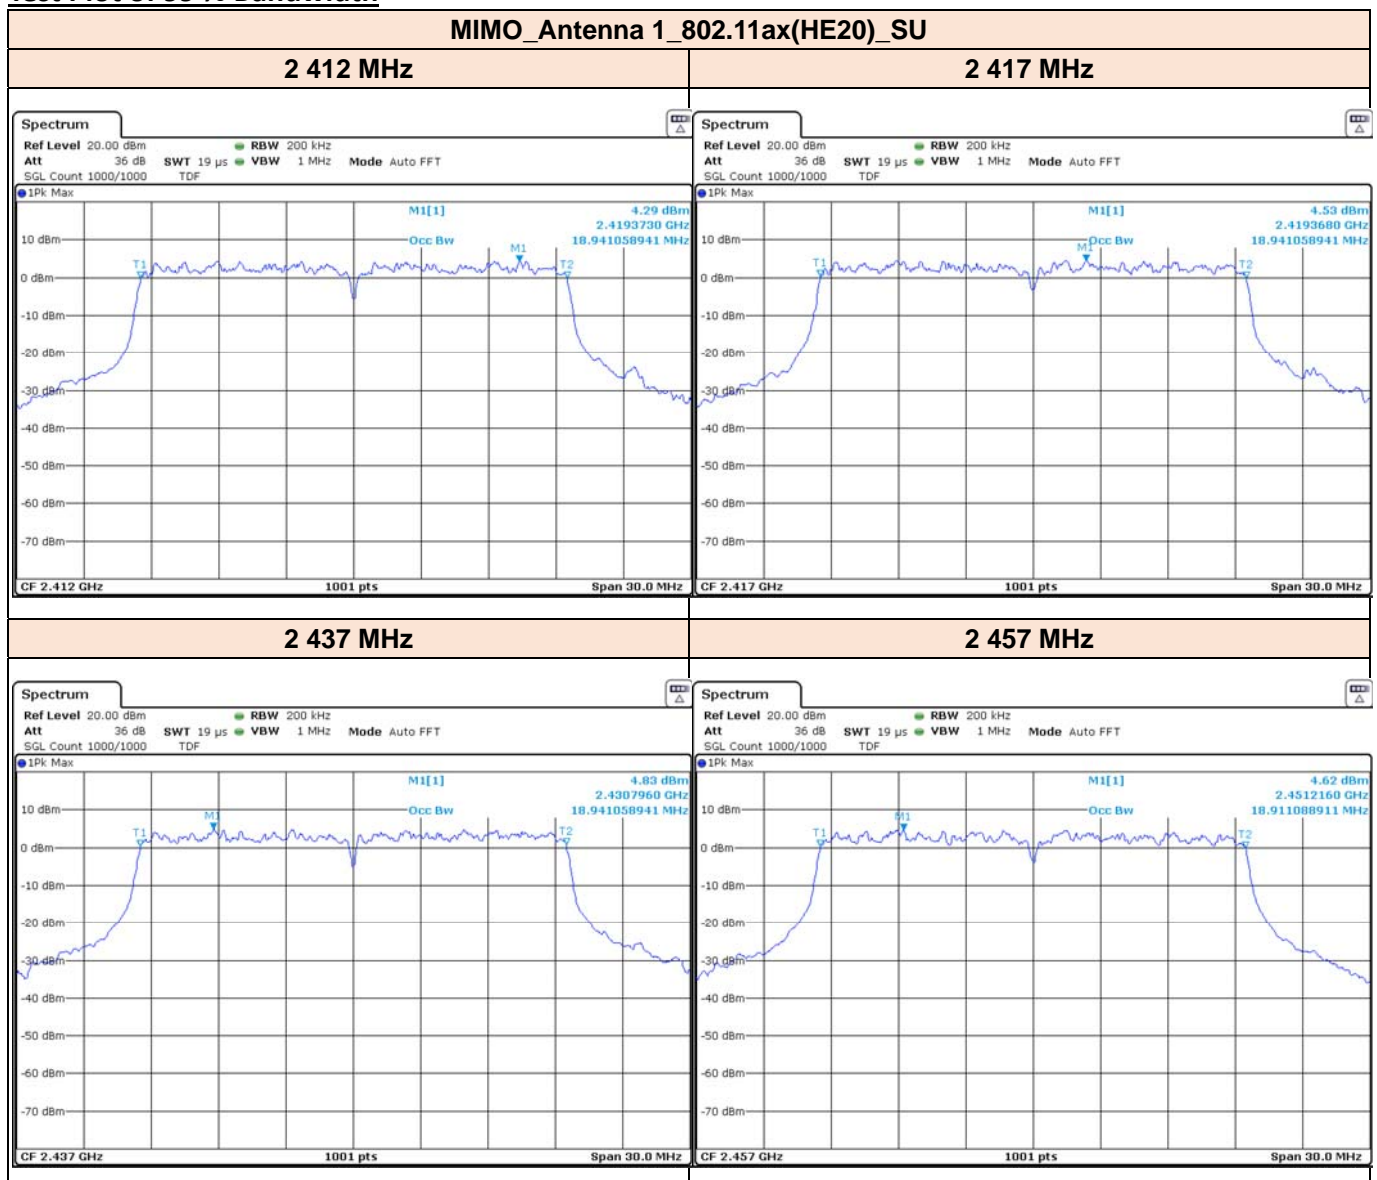



BUREAU
VERITAS

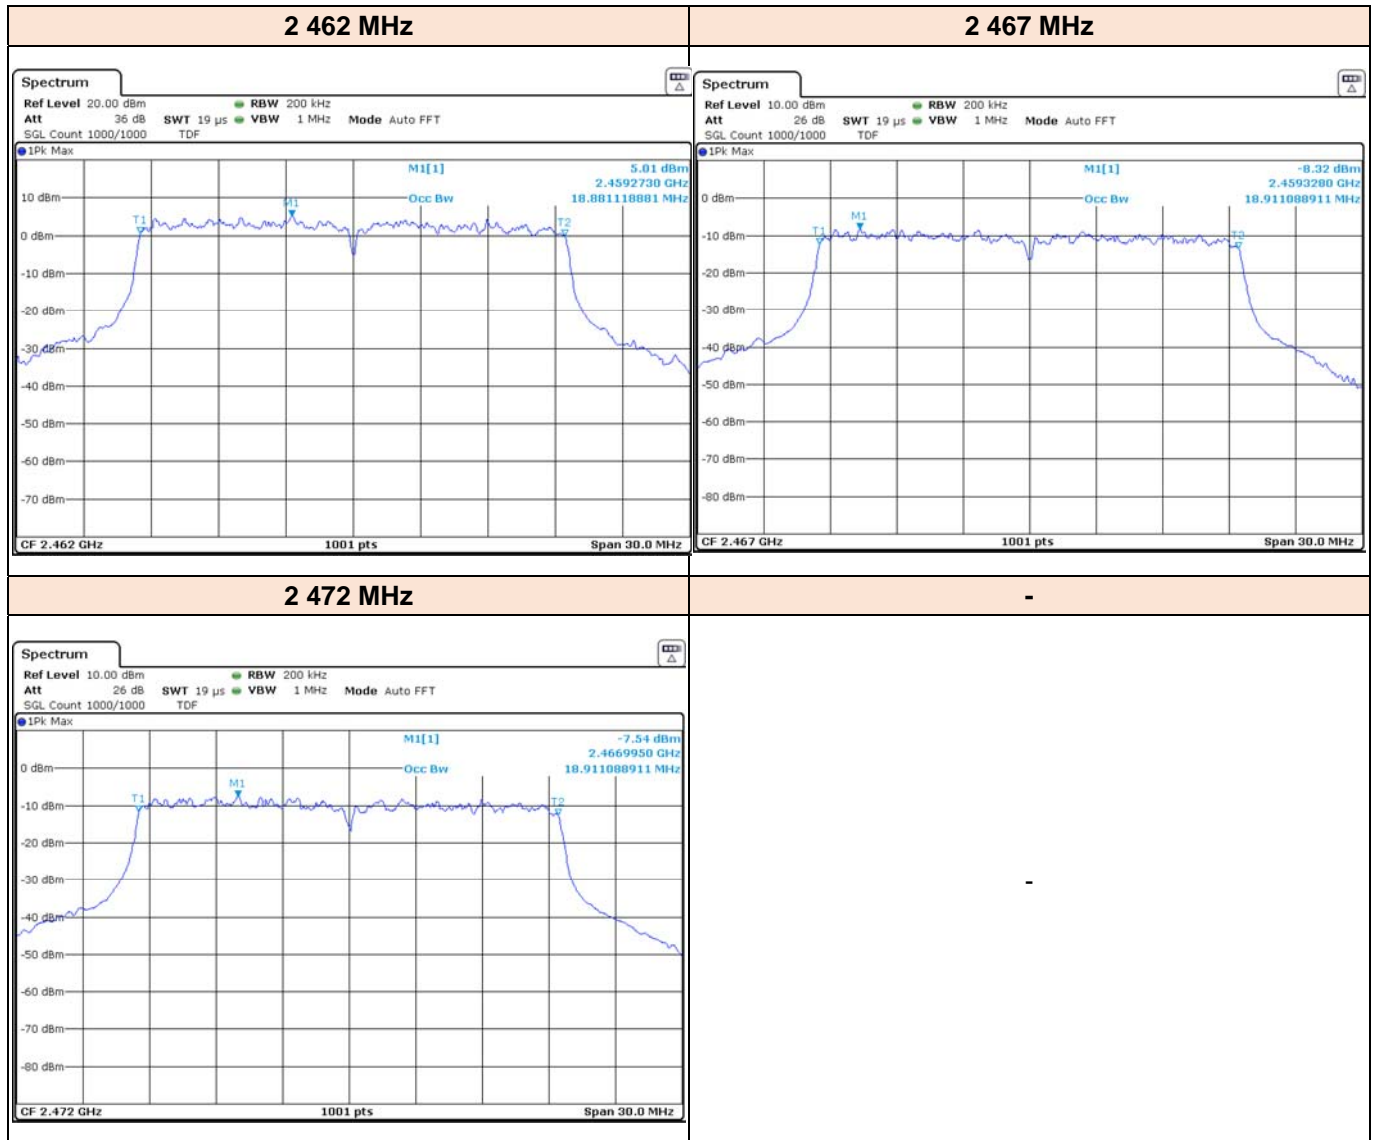





BUREAU
VERITAS

MIMO_Antenna 2_802.11ax(HE20)_SU



2 412 MHz

2 417 MHz

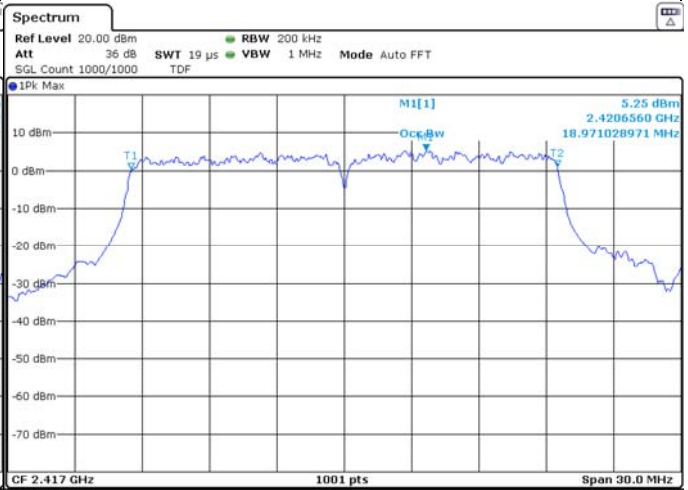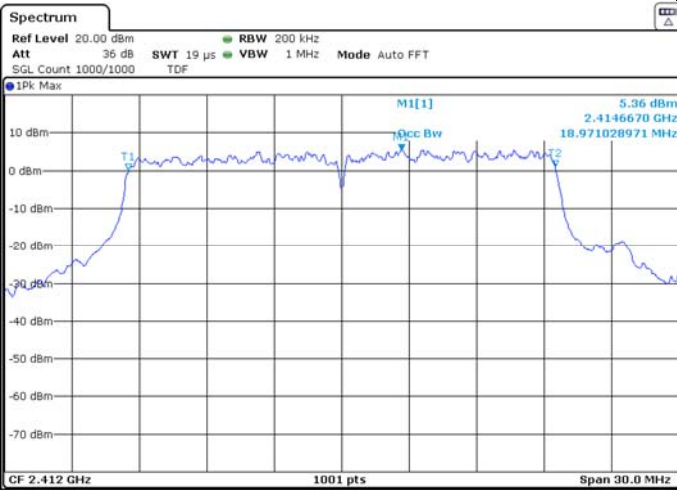


2 437 MHz

2 457 MHz

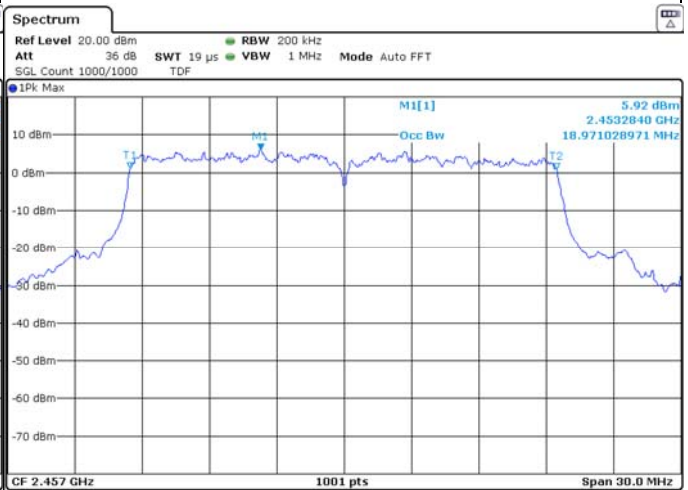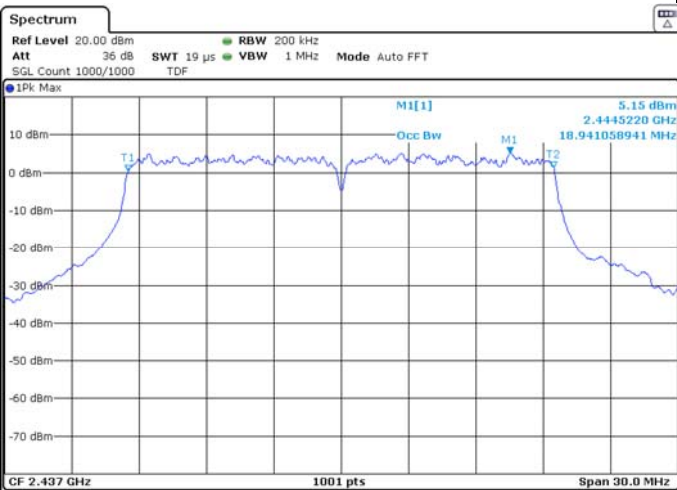



BUREAU
VERITAS

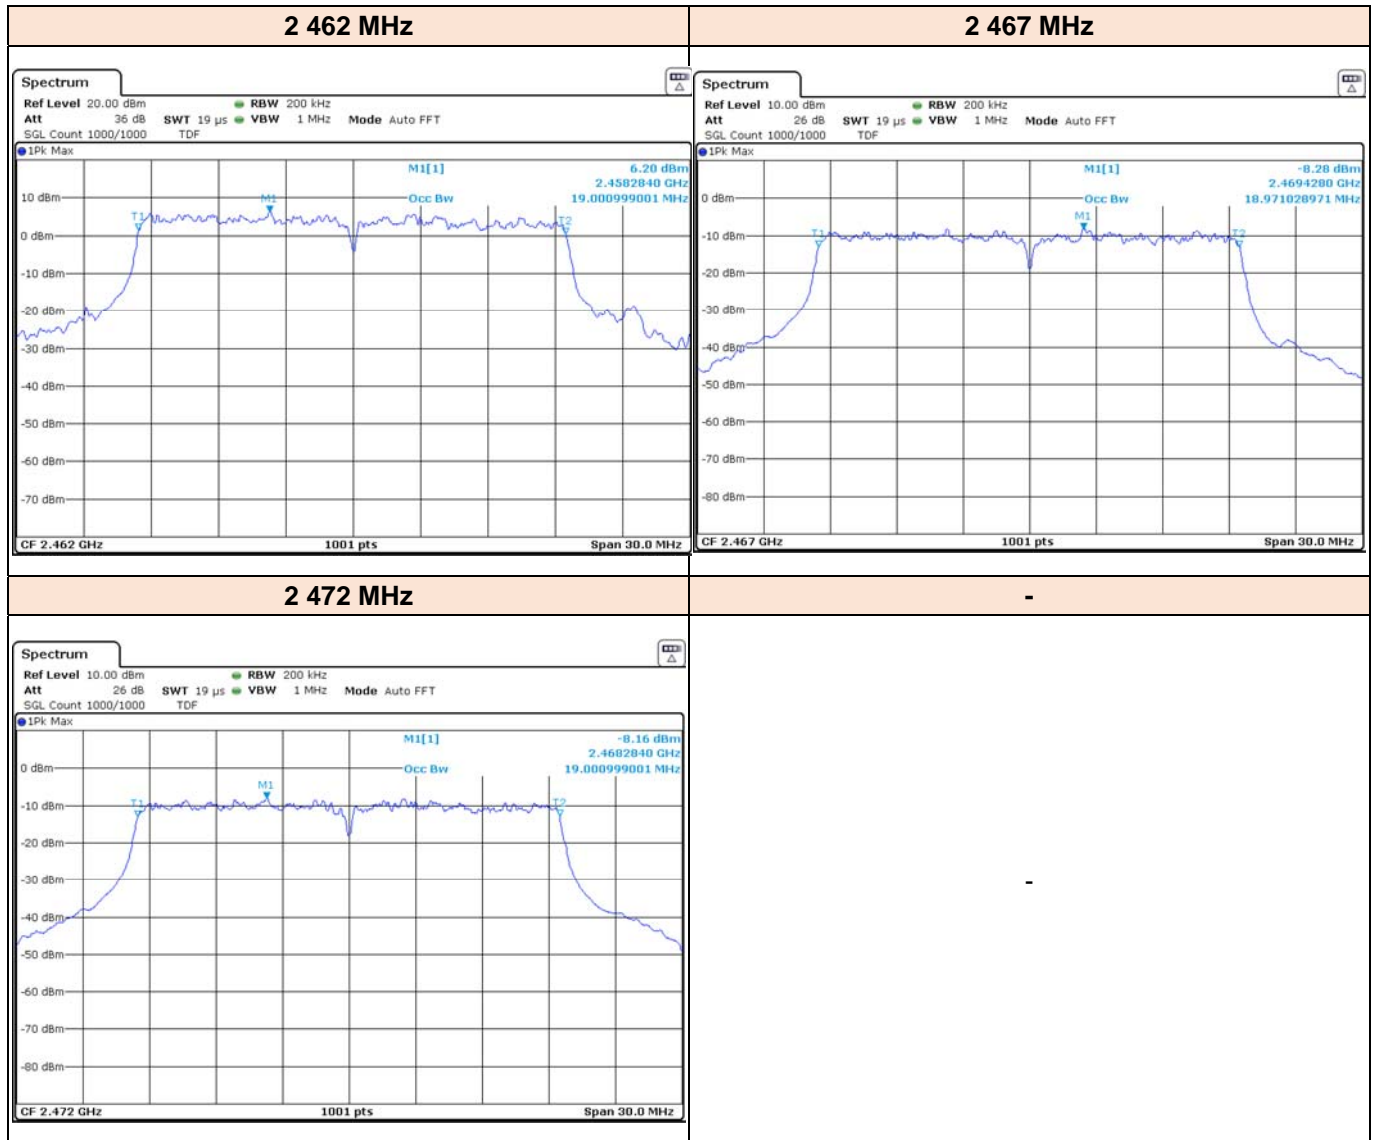

2.6 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards.

FCC CFR 47 Part 15, Subpart C (§15.247)

KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items in this test report have been performed and recorded as per the above standards.

2.7 Test Equipment

Test Equipment is traceable to the National Institute of Standards and Technology (NIST). Measurement antenna used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Serial Number	Cal Date	Cal Due
R&S	HFH2-Z2E	Active Loop Antenna, 30 MHz	349806	2019.03.27	2021.03.27
Schwarzbeck	VULB 9163	Trilog Antenna, 3 GHz (with 6 dB ATT.)	01199	2019.04.03	2021.04.03
R&S	HF907	Horn Antenna, 18 GHz	102772	2020.01.22	2021.01.22
Steatite Antenna	QSH-SL-18-26-S-20	Horn Antenna, 26.5 GHz	19926	2020.03.04	2021.03.04
R&S	SCU08F2	Signal Conditioning Unit, 8 GHz	08400016	2019.12.30	2020.12.30
R&S	SCU-18F	Signal Conditioning Unit, 18 GHz	180111	2019.12.30	2020.12.30
R&S	SCU-26F	Signal Conditioning Unit, 26.5 GHz	260005	2019.12.30	2020.12.30
L3 Narda-MITEQ	JS44-18004000-33-8P	Amplifier, 40 GHz	2142086	2020.04.07	2021.04.07
R&S	ESW44	EMI Test Receiver, 44 GHz	101812	2020.02.20	2021.02.20
R&S	FSV30	Spectrum Analyzer, 30 GHz	103017	2019.12.27	2020.12.27
Aeroflex	40AH2W-3	Attenuator, 3 dB	1	2019.12.31	2020.12.31
Mini-Circuits	VAT-10W2+	Attenuator, 10 dB	1531	2020.01.02	2021.01.02
Aeroflex	40AH2W-10	Attenuator, 10 dB	1	2019.12.31	2020.12.31
Wt Microwave	WT-A1698-HS	High Pass Filter 3.5 GHz	WT190313-6-4	2020.01.03	2021.01.03
R&S	NRP6A	Average Power Sensor	102045	2019.12.31	2020.12.31
R&S	NRP6A	Average Power Sensor	102044	2019.12.31	2020.12.31
R&S	NRX	Power Meter, 110 GHz	100947	2019.12.30	2020.12.30
Keysight Technologies	MP400B	MIMO Power Set Master, 18 GHz	None	2020.01.03	2021.01.03
R&S	ENV216	LISN	102437	2019.12.26	2020.12.26
R&S	ESR	EMI Test Receiver, 3.6 GHz	102529	2019.12.27	2020.12.27

3 Test Results

3.1 Antenna Requirement

Except from §15.203 of the FCC Rules/Regulations:

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of the section.

- The antenna(s) of the EUT are Permanently attached.
- There are no provisions for connection to an external antenna.

Result

The EUT complies with the requirement of §15.203

3.2 6 dB Bandwidth

3.2.1 Regulation

§15.247(a)(2) : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


3.2.2 Test Procedure

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., $RBW = 100 \text{ kHz}$, $VBW \geq 3 \times RBW$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq 6 \text{ dB}$.

3.2.3 Deviation from Test Standard

No deviation.

3.2.4 Test Setup

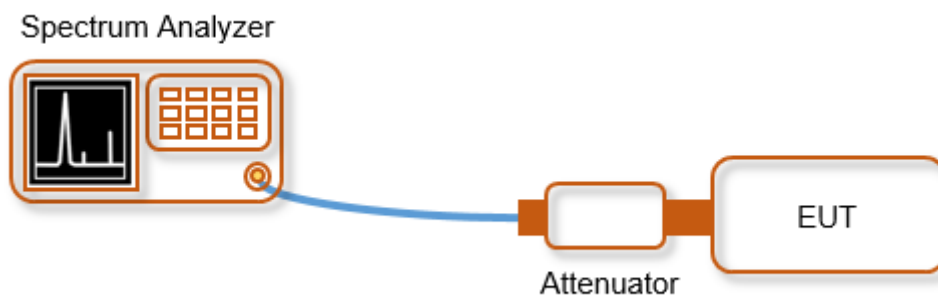

3.2.5 Test Result

[Test Data of 6 dB Bandwidth]

Test Mode	Channel	Frequency [MHz]	Tones	RU Offest	Test Result		Limit [MHz]
					ANT1	ANT2	
802.11ax HE20	1	2 412	26T	8 / 8	2.098	2.048	0.500
	2	2 417		8 / 8	2.098	2.098	
	6	2 437		0 / 0	2.048	2.048	
	10	2 457		8 / 0	1.998	2.048	
	11	2 462		0 / 0	2.098	2.048	
	12	2 467		0 / 0	2.148	2.048	
	13	2 472		0 / 0	2.048	2.048	
Worst Result					1.998	2.048	





BUREAU
VERITAS

[Test Plot of 6 dB Bandwidth]

MIMO_Antenna 1_802.11ax(HE20)_SU

2 412 MHz

2 417 MHz

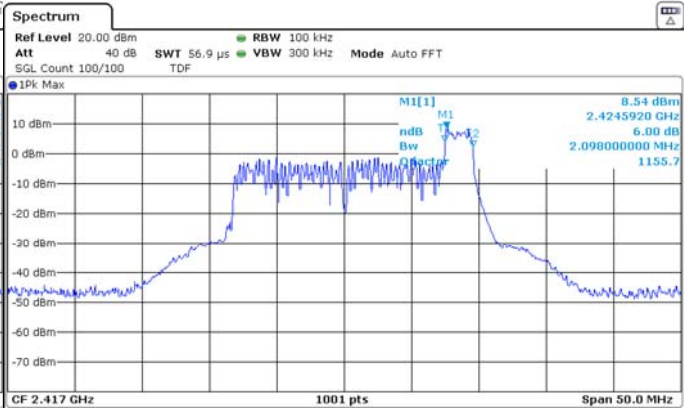
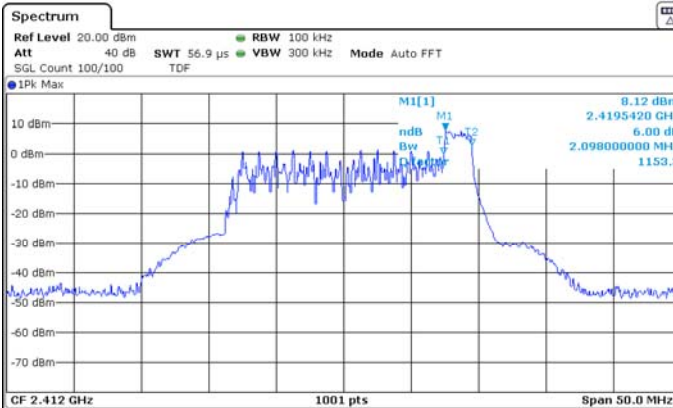


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		2.419542 GHz	8.12 dBm	ndB down	2.098 MHz
T1	1		2.419393 GHz	0.13 dBm	ndB	
T2	1		2.421491 GHz	2.91 dBm	Q factor	1153.3

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		2.424592 GHz	8.54 dBm	ndB down	2.098 MHz
T1	1		2.424443 GHz	4.11 dBm	ndB	
T2	1		2.42654 GHz	2.30 dBm	Q factor	1155.7


2 437 MHz

2 457 MHz

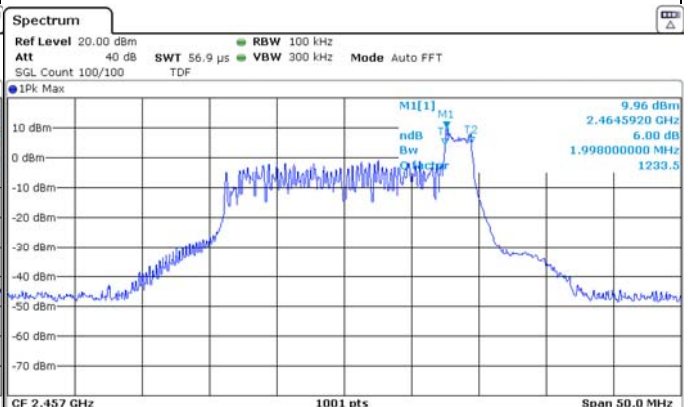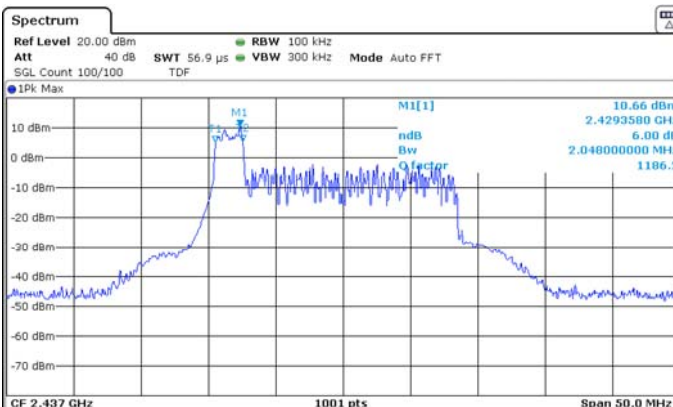

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		2.429358 GHz	10.66 dBm	ndB down	2.048 MHz
T1	1		2.427509 GHz	5.02 dBm	ndB	6.00 dB
T2	1		2.429557 GHz	5.35 dBm	Q factor	1186.2

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		2.464592 GHz	9.96 dBm	ndB down	1.998 MHz
T1	1		2.464443 GHz	4.26 dBm	ndB	6.00 dB
T2	1		2.466441 GHz	4.78 dBm	Q factor	1233.5

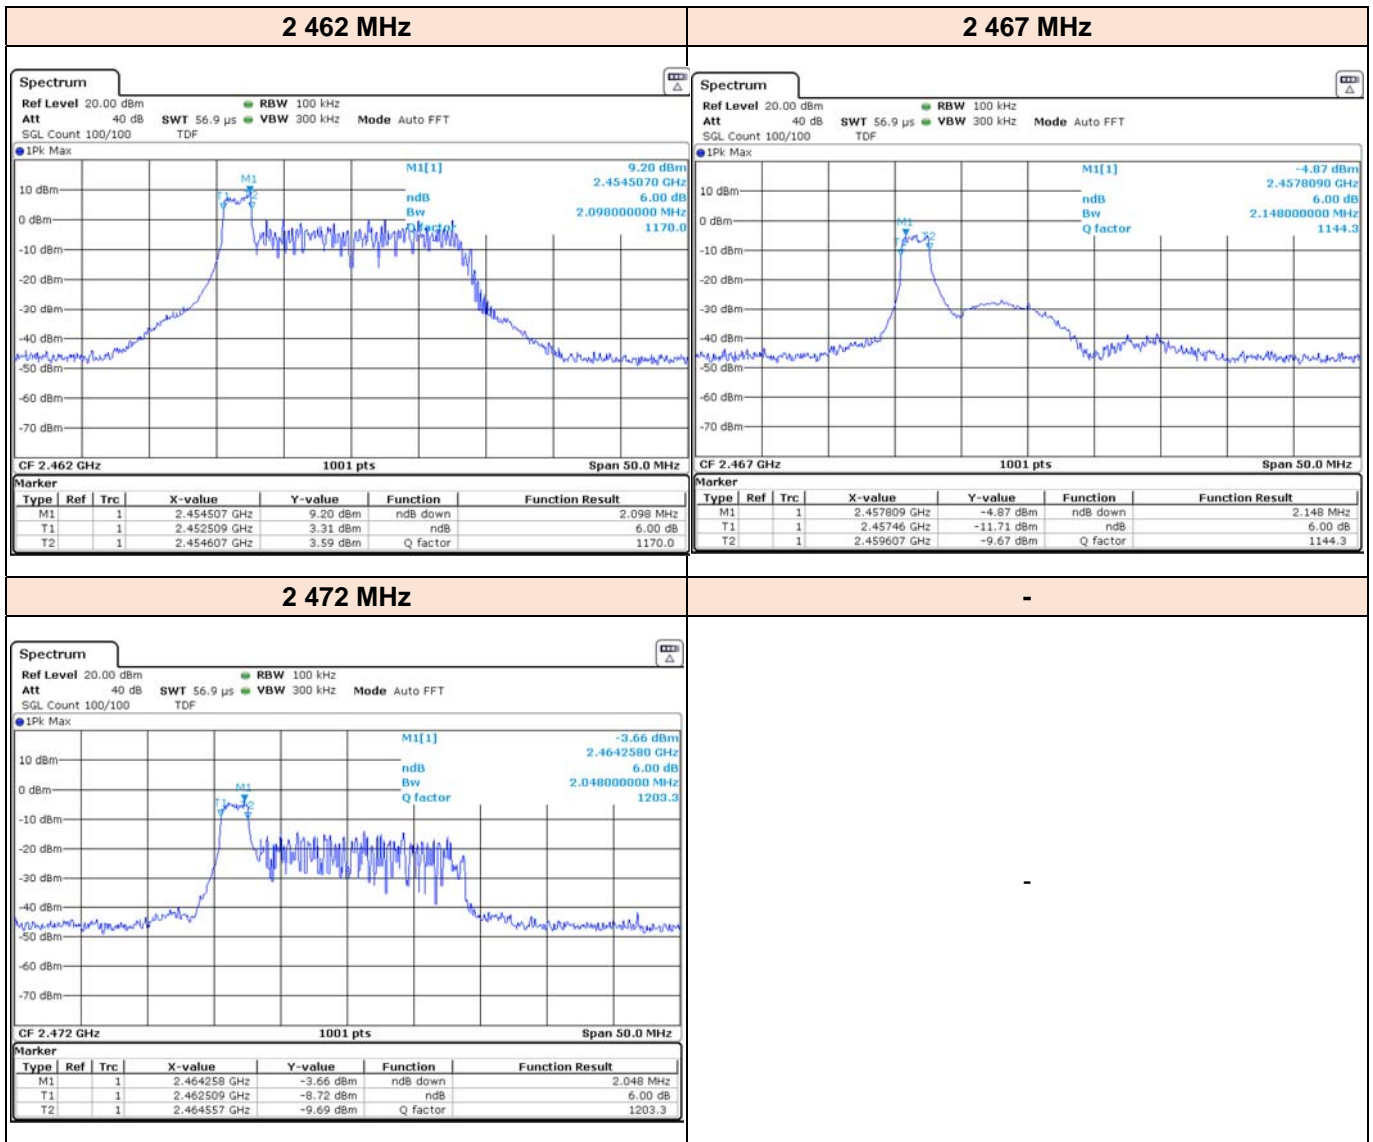





BUREAU
VERITAS

MIMO_Antenna 2_802.11ax(HE20)_SU

2 412 MHz

2 417 MHz

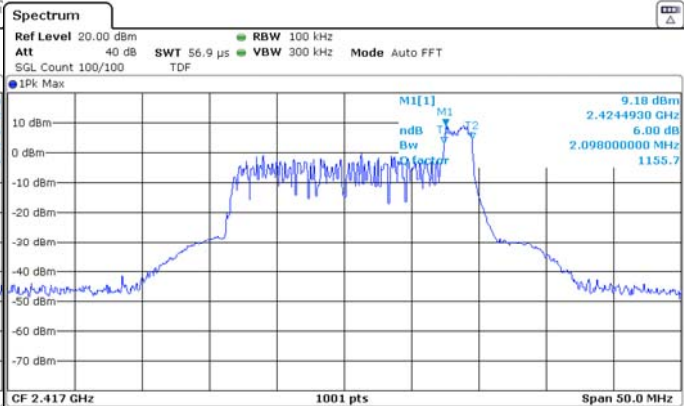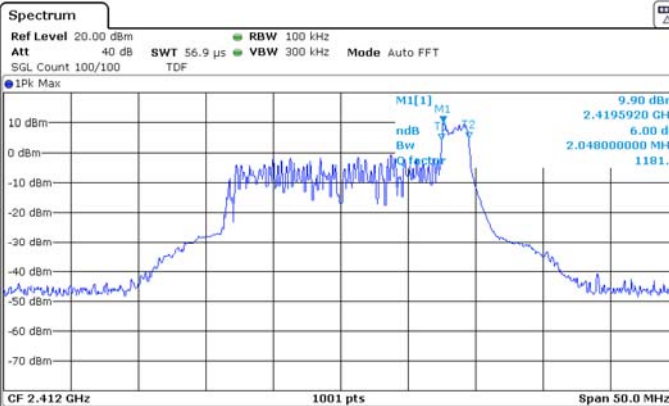


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		2.419592 GHz	9.90 dBm	ndB down	2.048 MHz
T1	1		2.419443 GHz	4.33 dBm	ndB	6.00 dB
T2	1		2.421491 GHz	4.79 dBm	Q factor	1181.5

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		2.424493 GHz	9.18 dBm	ndB down	2.098 MHz
T1	1		2.424393 GHz	3.09 dBm	ndB	6.00 dB
T2	1		2.426491 GHz	4.51 dBm	Q factor	1155.7


2 437 MHz

2 457 MHz

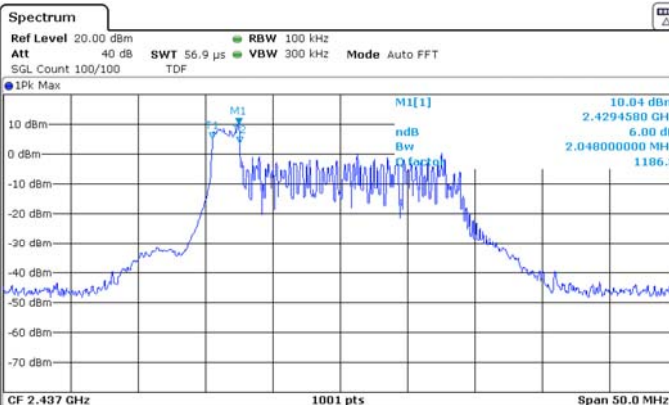

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		2.429458 GHz	10.04 dBm	ndB down	2.048 MHz
T1	1		2.427509 GHz	5.04 dBm	ndB	6.00 dB
T2	1		2.429557 GHz	3.57 dBm	Q factor	1186.3

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		2.448009 GHz	10.34 dBm	ndB down	2.048 MHz
T1	1		2.447509 GHz	4.67 dBm	ndB	6.00 dB
T2	1		2.449557 GHz	3.00 dBm	Q factor	1195.3

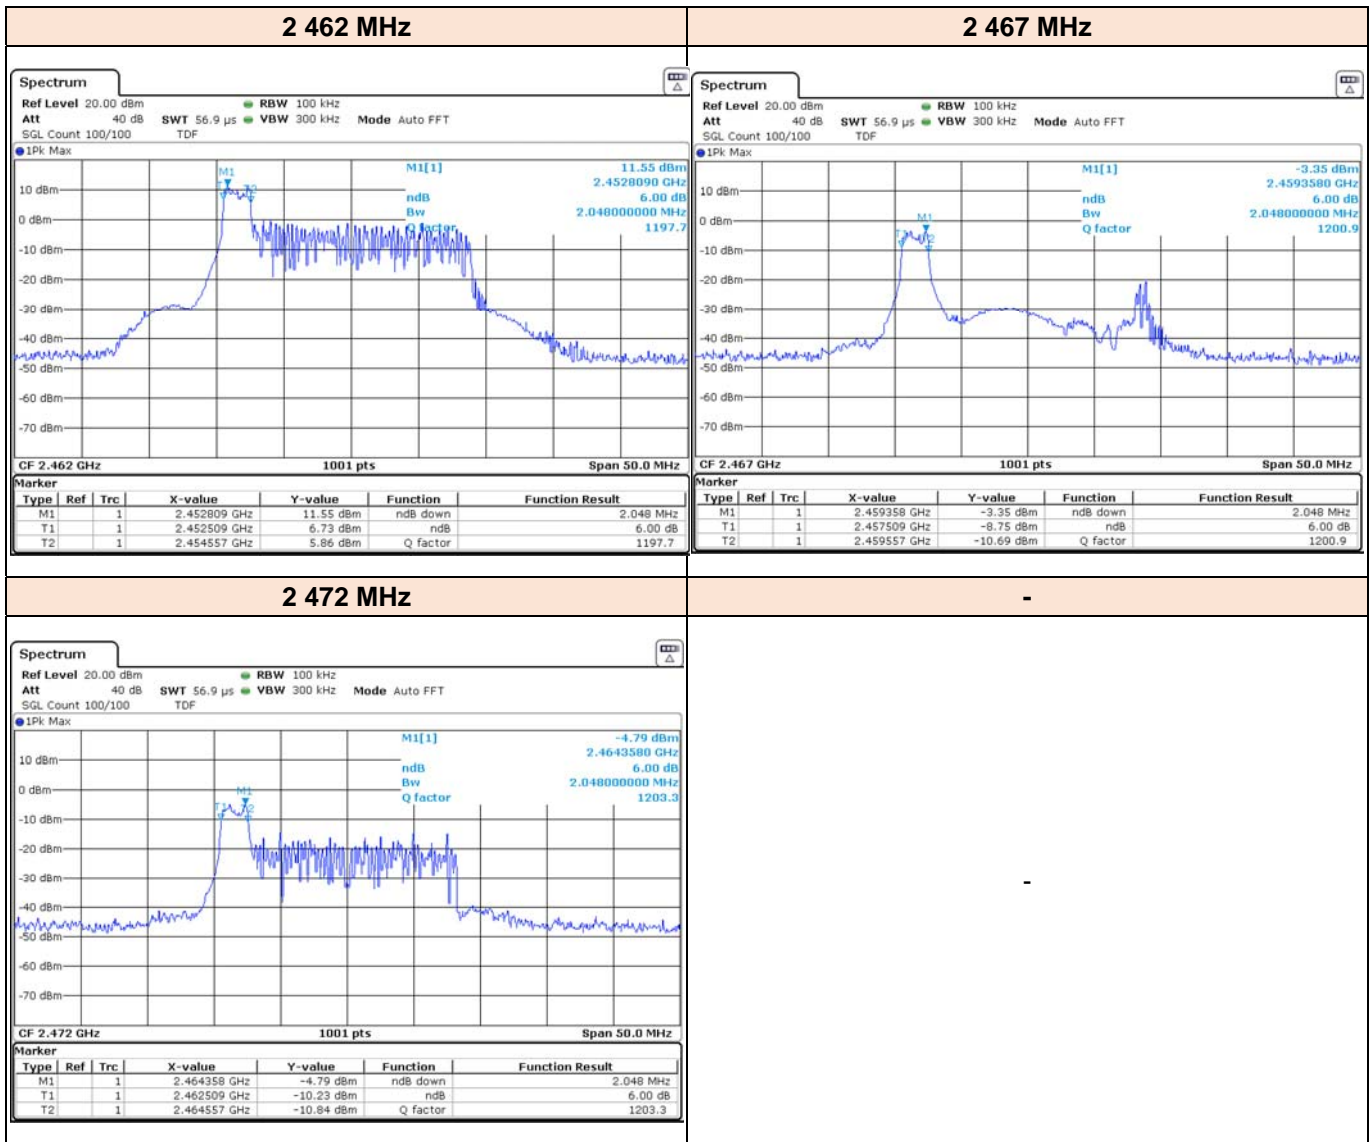

3.3 Maximum Peak Output Power

3.3.1 Regulation

§15.247(b)(3) : For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

§15.247(b)(4) : The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Test Procedure

The method of measurement used to test this FHSS device is ANSI C63.10-2013.

This is an RF conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation.

- a) Use the following spectrum analyzer settings:


Peak Power Measurement

- 1) Span : Approximately five times the 20 dB bandwidth, centered on hopping channel.
 - 2) RBW > 20 dB bandwidth of emission being measured.
 - 3) VBW \geq RBW.
 - 4) Sweep : Auto.
 - 5) Detector function : Peak.
 - 6) Trace : Max hold.
- b) Allow trace to stabilize
 - c) Use the marker-to-peak function to set the marker to the peak of the emissions
 - d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
 - e) A plot of the test results and setup description shall be included in the test report.

3.3.3 Deviation from Test Standard

No deviation.

3.3.4 Test Setup

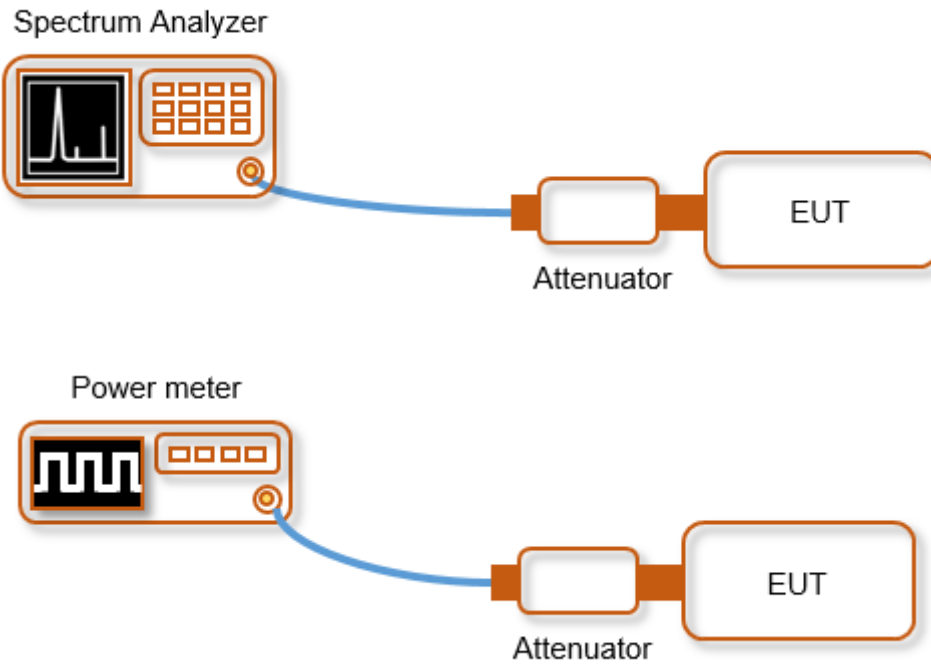

3.3.5 Test Result

[Test Result of Peak Power]

SISO Mode

Frequency Range [MHz]	Antenna Gain		Correlated Directional Gain [dBi]	Power Limit [dBm]	Max. Power [dBm]
	ANT1	ANT2			
2 412 - 2 472	-5.71	-6.52	-3.09	30.00	25.32

Channel	Frequency [MHz]	Tone	RU Offset	Measured Power [dBm]		Peak Result [dBm]		Power Limit [dBm]
				ANT1	ANT2	ANT1	ANT2	
1	2 412	26T	0	-	24.70	-	24.70	30.00
			4	-	23.54	-	23.54	
			8	-	24.60	-	24.60	
		52T	37	-	24.62	-	24.62	
			38	-	23.13	-	23.13	
			40	-	24.19	-	24.19	
		106T	53	-	21.02	-	21.02	
			54	-	22.39	-	22.39	
		242T/SU	-	-	22.63	-	22.63	
2	2 417	26T	0	-	25.10	-	25.10	30.00
			4	-	25.03	-	25.03	
			8	-	24.02	-	24.02	
		52T	37	-	25.00	-	25.00	
			38	-	25.00	-	25.00	
			40	-	24.70	-	24.70	
		106T	53	-	22.13	-	22.13	
			54	-	23.00	-	23.00	
		242T/SU	-	-	22.99	-	22.99	
6	2 437	26T	0	-	24.01	-	24.01	30.00
			4	-	23.13	-	23.13	
			8	-	25.28	-	25.28	
		52T	37	-	25.32	-	25.32	
			38	-	24.12	-	24.12	
			40	-	24.12	-	24.12	
		106T	53	-	23.94	-	23.94	
			54	-	23.97	-	23.97	
		242T/SU	-	-	23.63	-	23.63	



Channel	Frequency [MHz]	Tone	RU Offset	Measured Power [dBm]		Peak Result [dBm]		Power Limit [dBm]
				ANT1	ANT2	ANT1	ANT2	
10	2 457	26T	0	-	23.29	-	23.29	30.00
			4	-	24.59	-	24.59	
			8	-	24.61	-	24.61	
		52T	37	-	25.05	-	25.05	
			38	-	24.59	-	24.59	
			40	-	24.54	-	24.54	
		106T	53	-	24.59	-	24.59	
			54	-	22.60	-	22.60	
242T/SU	-	-	22.99	-	22.99			
11	2 462	26T	0	-	24.34	-	24.34	30.00
			4	-	23.52	-	23.52	
			8	-	24.41	-	24.41	
		52T	37	-	23.86	-	23.86	
			38	-	24.17	-	24.17	
			40	-	24.37	-	24.37	
		106T	53	-	22.53	-	22.53	
			54	-	22.10	-	22.10	
242T/SU	-	-	21.25	-	21.25			
12	2 467	26T	0	-	16.01	-	16.01	30.00
			4	-	14.85	-	14.85	
			8	-	14.07	-	14.07	
		52T	37	-	15.57	-	15.57	
			38	-	15.22	-	15.22	
			40	-	15.11	-	15.11	
		106T	53	-	15.10	-	15.10	
			54	-	15.00	-	15.00	
242T/SU	-	-	15.76	-	15.76			
13	2 472	26T	0	-	8.86	-	8.86	30.00
			4	-	8.85	-	8.85	
			8	-	8.88	-	8.88	
		52T	37	-	8.72	-	8.72	
			38	-	8.05	-	8.05	
			40	-	8.38	-	8.38	
		106T	53	-	8.53	-	8.53	
			54	-	7.45	-	7.45	
242T/SU	-	-	8.56	-	8.56			



MIMO Mode

Channel	Frequency [MHz]	Tone	RU Offset	Measured Power [dBm]		Peak Result [dBm]	Power Limit [dBm]
				ANT1	ANT2		
1	2 412	26T	0	25.10	25.15	28.14	30.00
			4	25.16	25.12	28.15	
			8	25.23	24.21	27.76	
		52T	37	24.13	25.11	27.66	
			38	23.78	25.14	27.52	
			40	25.10	25.13	28.13	
		106T	53	23.75	21.72	25.86	
			54	23.48	23.31	26.41	
		242T/SU	-	23.35	23.08	26.23	
2	2 417	26T	0	25.02	25.11	28.08	30.00
			4	25.17	25.16	28.18	
			8	23.50	25.05	27.35	
		52T	37	25.09	25.18	28.15	
			38	24.23	23.89	27.07	
			40	24.65	25.13	27.91	
		106T	53	23.63	23.56	26.61	
			54	23.52	23.55	26.55	
		242T/SU	-	23.42	23.57	26.51	
6	2 437	26T	0	25.18	25.47	28.34	30.00
			4	25.12	25.41	28.28	
			8	24.14	23.89	27.03	
		52T	37	25.12	25.46	28.30	
			38	24.98	24.27	27.65	
			40	25.11	24.19	27.68	
		106T	53	23.99	23.56	26.79	
			54	24.02	23.73	26.89	
		242T/SU	-	23.73	23.90	26.83	



Channel	Frequency [MHz]	Tone	RU Offset	Measured Power [dBm]		Peak Result [dBm]	Power Limit [dBm]
				ANT1	ANT2		
10	2 457	26T	0	23.36	25.00	27.27	30.00
			4	23.82	24.91	27.41	
			8	25.09	25.06	28.09	
		52T	37	25.01	25.23	28.13	
			38	24.99	24.98	28.00	
			40	24.60	25.00	27.81	
		106T	53	24.15	23.41	26.81	
			54	23.81	22.74	26.32	
		242T/SU	-	24.19	22.93	26.62	
11	2 462	26T	0	24.97	25.94	28.49	30.00
			4	24.10	24.68	27.41	
			8	25.01	24.71	27.87	
		52T	37	24.87	25.49	28.20	
			38	24.90	24.75	27.84	
			40	23.81	23.81	26.82	
		106T	53	23.06	22.79	25.94	
			54	22.29	21.74	25.03	
		242T/SU	-	21.95	21.00	24.51	
12	2 467	26T	0	13.28	13.46	16.38	30.00
			4	13.41	13.13	16.28	
			8	13.34	13.11	16.24	
		52T	37	13.44	13.08	16.27	
			38	13.44	13.11	16.29	
			40	13.29	13.02	16.17	
		106T	53	13.53	13.11	16.34	
			54	11.77	13.03	15.46	
		242T/SU	-	13.14	13.41	16.29	
13	2 472	26T	0	7.40	7.43	10.43	30.00
			4	7.57	7.43	10.51	
			8	7.59	7.42	10.52	
		52T	37	7.82	7.42	10.63	
			38	7.60	7.19	10.41	
			40	7.58	7.41	10.51	
		106T	53	8.63	7.55	11.13	
			54	7.59	7.55	10.58	
		242T/SU	-	6.48	7.55	10.06	

[Test Result of Average Power]
SISO Mode

Frequency Range [MHz]	Antenna Gain		Correlated Directional Gain [dBi]	Power Limit [dBm]	Max. Power [dBm]
	ANT1	ANT2			
2 412 - 2 472	-5.71	-6.52	-3.09	30.00	14.97

Channel	Frequency [MHz]	Tone	RU Offset	Measured Power [dBm]		Average Result [dBm]		Power Limit [dBm]
				ANT1	ANT2	ANT1	ANT2	
1	2 412	26T	0	-	14.13	-	14.13	30.00
			4	-	14.52	-	14.52	
			8	-	14.77	-	14.77	
		52T	37	-	14.15	-	14.15	
			38	-	14.32	-	14.32	
			40	-	14.77	-	14.77	
		106T	53	-	13.51	-	13.51	
			54	-	14.62	-	14.62	
		242T/SU	-	-	14.87	-	14.87	
2	2 417	26T	0	-	14.11	-	14.11	30.00
			4	-	14.42	-	14.42	
			8	-	14.33	-	14.33	
		52T	37	-	14.09	-	14.09	
			38	-	14.33	-	14.33	
			40	-	14.69	-	14.69	
		106T	53	-	13.38	-	13.38	
			54	-	14.52	-	14.52	
		242T/SU	-	-	14.70	-	14.70	
6	2 437	26T	0	-	14.35	-	14.35	30.00
			4	-	14.29	-	14.29	
			8	-	14.24	-	14.24	
		52T	37	-	14.26	-	14.26	
			38	-	14.49	-	14.49	
			40	-	14.29	-	14.29	
		106T	53	-	14.59	-	14.59	
			54	-	14.42	-	14.42	
		242T/SU	-	-	14.67	-	14.67	



Channel	Frequency [MHz]	Tone	RU Offset	Measured Power [dBm]		Average Result [dBm]		Power Limit [dBm]
				ANT1	ANT2	ANT1	ANT2	
10	2 457	26T	0	-	14.90	-	14.90	30.00
			4	-	14.51	-	14.51	
			8	-	14.00	-	14.00	
		52T	37	-	14.61	-	14.61	
			38	-	14.53	-	14.53	
			40	-	14.12	-	14.12	
		106T	53	-	14.86	-	14.86	
			54	-	14.09	-	14.09	
242T/SU	-	-	14.54	-	14.54			
11	2 462	26T	0	-	14.97	-	14.97	30.00
			4	-	14.19	-	14.19	
			8	-	14.13	-	14.13	
		52T	37	-	14.86	-	14.86	
			38	-	14.71	-	14.71	
			40	-	14.10	-	14.10	
		106T	53	-	14.58	-	14.58	
			54	-	13.66	-	13.66	
242T/SU	-	-	12.65	-	12.65			
12	2 467	26T	0	-	4.57	-	4.57	30.00
			4	-	3.72	-	3.72	
			8	-	3.07	-	3.07	
		52T	37	-	4.55	-	4.55	
			38	-	4.19	-	4.19	
			40	-	3.13	-	3.13	
		106T	53	-	4.39	-	4.39	
			54	-	3.32	-	3.32	
242T/SU	-	-	4.71	-	4.71			
13	2 472	26T	0	-	-2.67	-	-2.67	30.00
			4	-	-2.98	-	-2.98	
			8	-	-3.27	-	-3.27	
		52T	37	-	-2.61	-	-2.61	
			38	-	-2.73	-	-2.73	
			40	-	-3.13	-	-3.13	
		106T	53	-	-2.45	-	-2.45	
			54	-	-2.81	-	-2.81	
242T/SU	-	-	-2.44	-	-2.44			



MIMO Mode

Frequency Range [MHz]	Antenna Gain		Correlated Directional Gain [dBi]	Power Limit [dBm]	Max. Power [dBm]
	ANT1	ANT2			
2 412 - 2 472	-5.71	-6.52	-3.09	30.00	17.97

Channel	Frequency [MHz]	Tone	RU Offset	Measured Power [dBm]		Average Result [dBm]	Power Limit [dBm]
				ANT1	ANT2		
1	2 412	26T	0	13.49	14.47	17.02	30.00
			4	14.03	14.70	17.39	
			8	14.24	14.87	17.58	
		52T	37	13.83	14.44	17.16	
			38	14.14	14.44	17.30	
			40	14.31	15.05	17.71	
		106T	53	14.04	14.33	17.20	
			54	14.01	15.40	17.77	
		242T/SU	-	14.21	15.06	17.67	
2	2 417	26T	0	14.04	14.29	17.18	30.00
			4	14.06	14.62	17.36	
			8	14.12	14.81	17.49	
		52T	37	14.13	14.25	17.20	
			38	14.37	14.44	17.42	
			40	14.26	14.91	17.61	
		106T	53	14.06	14.23	17.16	
			54	14.17	15.16	17.70	
		242T/SU	-	14.31	14.92	17.64	
6	2 437	26T	0	14.64	14.66	17.66	30.00
			4	14.21	14.52	17.38	
			8	14.12	14.40	17.27	
		52T	37	14.57	14.46	17.53	
			38	14.61	14.65	17.64	
			40	14.19	14.48	17.35	
		106T	53	14.28	14.71	17.51	
			54	14.39	14.61	17.51	
		242T/SU	-	14.51	14.79	17.66	



Channel	Frequency [MHz]	Tone	RU Offset	Measured Power [dBm]		Average Result [dBm]	Power Limit [dBm]
				ANT1	ANT2		
10	2 457	26T	0	13.35	15.34	17.47	30.00
			4	13.88	15.06	17.52	
			8	14.24	13.87	17.07	
		52T	37	14.13	15.36	17.80	
			38	13.71	15.23	17.55	
			40	13.96	14.21	17.10	
		106T	53	14.02	15.53	17.85	
			54	13.65	14.52	17.12	
242T/SU	-	14.05	15.17	17.66			
11	2 462	26T	0	14.01	15.74	17.97	30.00
			4	13.80	15.02	17.46	
			8	13.73	14.26	17.01	
		52T	37	13.91	15.73	17.92	
			38	14.19	15.39	17.84	
			40	13.97	14.25	17.12	
		106T	53	13.83	15.19	17.57	
			54	12.87	14.09	16.53	
242T/SU	-	12.24	13.34	15.84			
12	2 467	26T	0	1.32	1.10	4.22	30.00
			4	0.89	0.96	3.94	
			8	0.01	0.45	3.25	
		52T	37	1.48	1.24	4.37	
			38	1.55	1.08	4.33	
			40	0.22	0.65	3.45	
		106T	53	1.30	1.01	4.17	
			54	0.21	0.55	3.39	
242T/SU	-	1.43	1.38	4.42			
13	2 472	26T	0	-3.87	-4.10	-0.97	30.00
			4	-4.20	-4.41	-1.29	
			8	-5.08	-4.89	-1.97	
		52T	37	-3.29	-4.15	-0.69	
			38	-3.51	-4.38	-0.91	
			40	-4.80	-4.55	-1.66	
		106T	53	-3.36	-3.97	-0.64	
			54	-4.60	-4.29	-1.43	
242T/SU	-	-3.74	-3.97	-0.84			

3.4 Power Spectral Density

3.4.1 Regulation

§15.247(e) : For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.4.2 Test Procedure


The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

3.4.3 Deviation from Test Standard

No deviation.

3.4.4 Test Setup

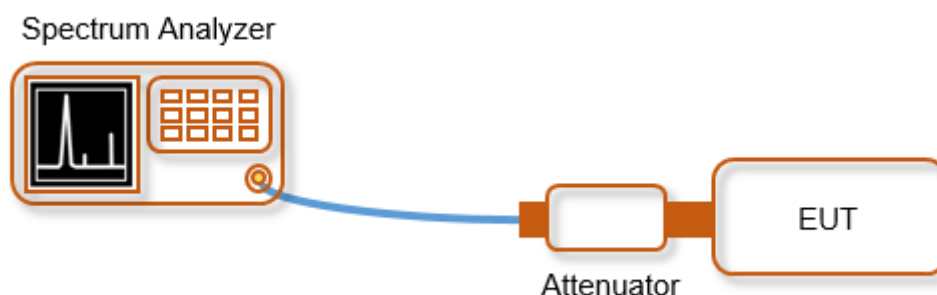

3.4.5 Test Result

[Test Data of Power Spectral Density]

SISO Mode

Duty Cycle Correction Factor		
802.11ax HE20	26T	0.00 dB
	242T/SU	0.00 dB

Channel	Frequency [MHz]	Tone	RU Offset	Measured PPSD [dBm/10 kHz]		Result [dBm/10 kHz]		Power Limit [dBm/3 kHz]	Margin [dB]
				ANT1	ANT2	ANT1	ANT2		
1	2 412	26T	0	-	-8.33	-	-8.33	8.00	16.33
			4	-	-7.36	-	-7.36		15.36
			8	-	-7.28	-	-7.28		15.28
		242T/SU	-	-	-16.25	-	-16.25		24.25
2	2 417	26T	0	-	-8.52	-	-8.52	8.00	16.52
			4	-	-8.54	-	-8.54		16.54
			8	-	-7.91	-	-7.91		15.91
		242T/SU	-	-	-16.26	-	-16.26		24.26
6	2 437	26T	0	-	-8.07	-	-8.07	8.00	16.07
			4	-	-8.44	-	-8.44		16.44
			8	-	-7.66	-	-7.66		15.66
		242T/SU	-	-	-16.27	-	-16.27		24.27
10	2 457	26T	0	-	-7.40	-	-7.40	8.00	15.40
			4	-	-7.61	-	-7.61		15.61
			8	-	-8.38	-	-8.38		16.38
		242T/SU	-	-	-15.99	-	-15.99		23.99
11	2 462	26T	0	-	-7.62	-	-7.62	8.00	15.62
			4	-	-8.11	-	-8.11		16.11
			8	-	-8.95	-	-8.95		16.95
		242T/SU	-	-	-16.19	-	-16.19		24.19
12	2 467	26T	0	-	-17.59	-	-17.59	8.00	25.59
			4	-	-18.77	-	-18.77		26.77
			8	-	-19.92	-	-19.92		27.92
		242T/SU	-	-	-26.22	-	-26.22		34.22
13	2 472	26T	0	-	-24.59	-	-24.59	8.00	32.59
			4	-	-25.39	-	-25.39		33.39
			8	-	-25.56	-	-25.56		33.56
		242T/SU	-	-	-33.46	-	-33.46		41.46


MIMO Mode

Duty Cycle Correction Factor		
802.11ax HE20	26T	0.00 dB
	242T/SU	0.00 dB

Channel	Frequency [MHz]	Tone	RU Offset	Measured PPSS [dBm/10 kHz]		Result [dBm/10 kHz]	Power Limit [dBm/3 kHz]	Margin [dB]
				ANT1	ANT2			
1	2 412	26T	0	-8.12	-7.36	-4.71	8.00	12.71
			4	-8.07	-6.15	-3.99		11.99
			8	-8.41	-7.50	-4.92		12.92
		242T/SU	-	-16.37	-14.07	-12.06		20.06
2	2 417	26T	0	-8.14	-7.82	-4.97	8.00	12.97
			4	-8.24	-7.69	-4.95		12.95
			8	-8.12	-7.71	-4.90		12.90
		242T/SU	-	-16.71	-14.41	-12.40		20.40
6	2 437	26T	0	-8.18	-7.82	-4.99	8.00	12.99
			4	-8.49	-7.51	-4.96		12.96
			8	-7.60	-7.87	-4.72		12.72
		242T/SU	-	-16.40	-15.28	-12.79		20.79
10	2 457	26T	0	-8.62	-6.23	-4.25	8.00	12.25
			4	-8.49	-7.46	-4.93		12.93
			8	-8.21	-8.11	-5.15		13.15
		242T/SU	-	-16.22	-13.79	-11.83		19.83
11	2 462	26T	0	-8.09	-5.52	-3.61	8.00	11.61
			4	-8.76	-7.44	-5.04		13.04
			8	-8.96	-8.26	-5.59		13.59
		242T/SU	-	-16.23	-16.08	-13.14		21.14
12	2 467	26T	0	-19.94	-19.53	-16.72	8.00	24.72
			4	-20.40	-19.69	-17.02		25.02
			8	-21.07	-20.86	-17.95		25.95
		242T/SU	-	-27.60	-27.45	-24.51		32.51
13	2 472	26T	0	-25.27	-25.78	-22.51	8.00	30.51
			4	-26.50	-26.24	-23.36		31.36
			8	-26.72	-26.41	-23.55		31.55
		242T/SU	-	-33.67	-32.91	-30.26		38.26



[Test Plot of Power Spectral Density]


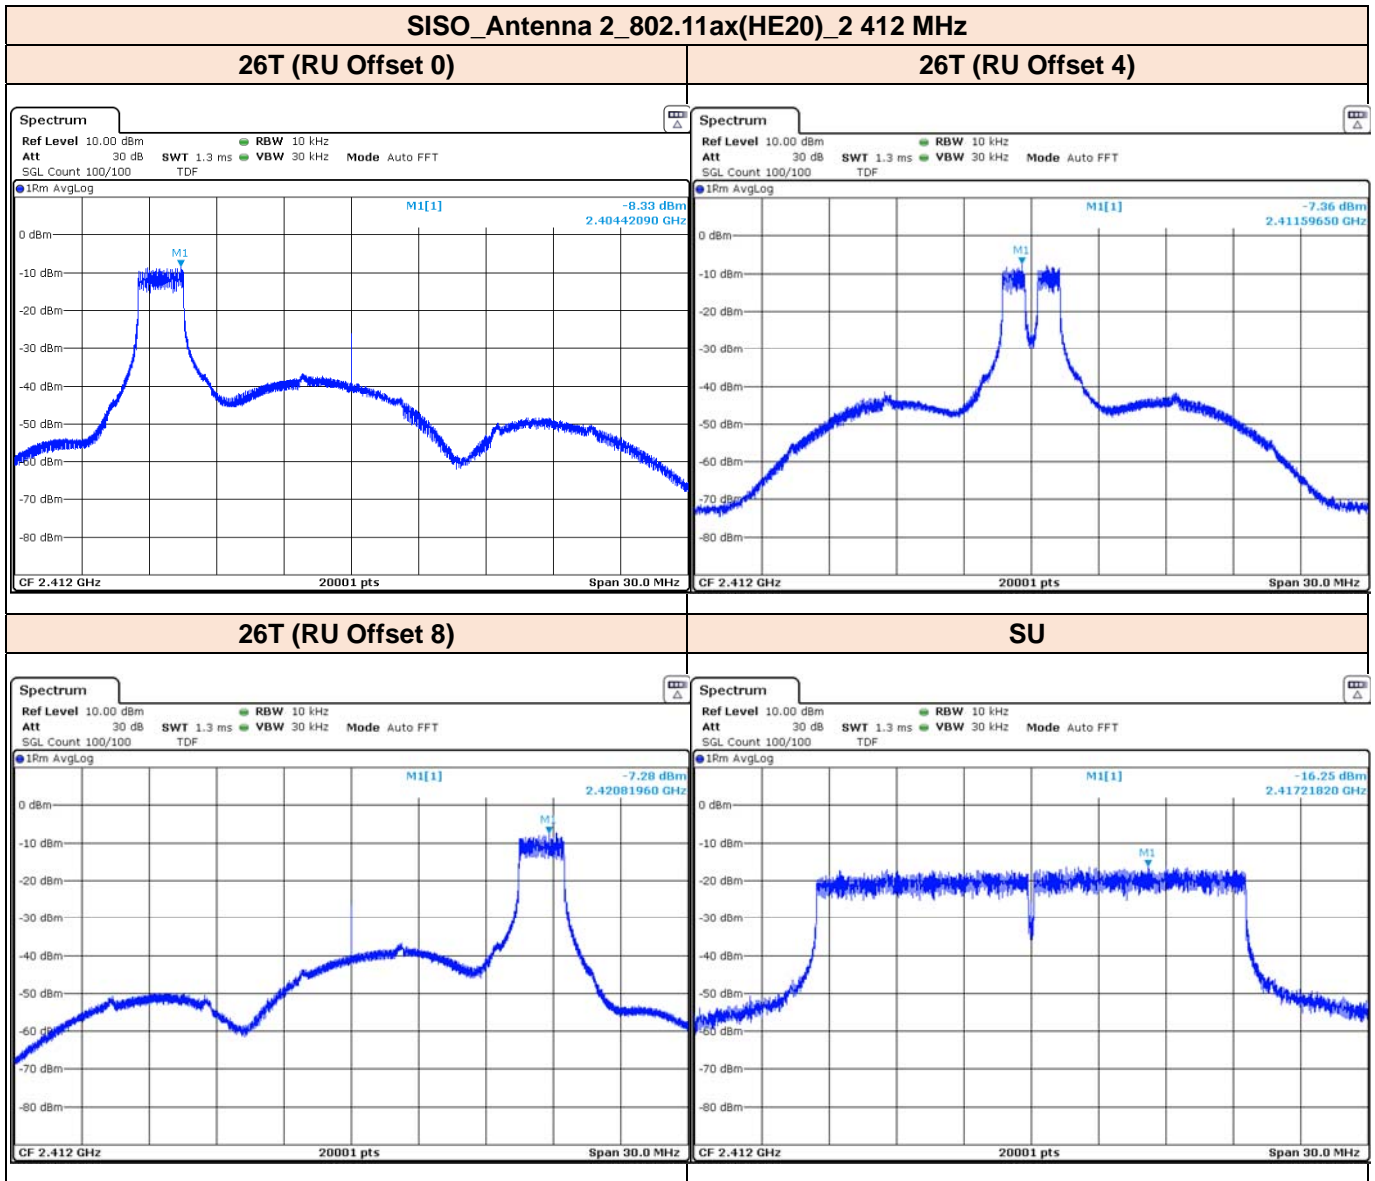




SISO_Antenna 2_802.11ax(HE20)_2 417 MHz



26T (RU Offset 0)

26T (RU Offset 4)

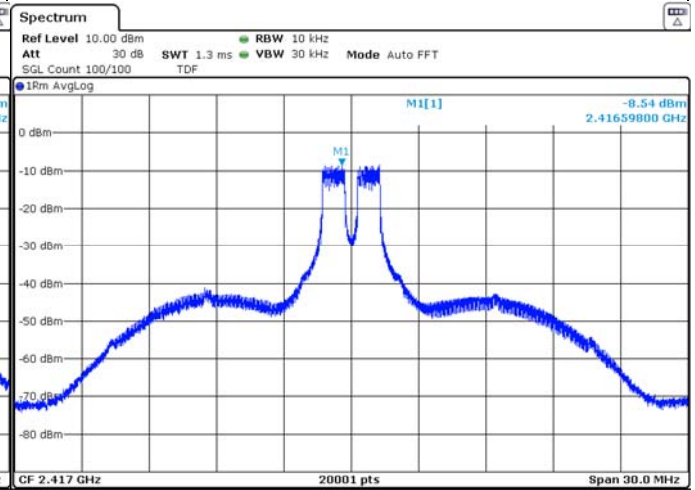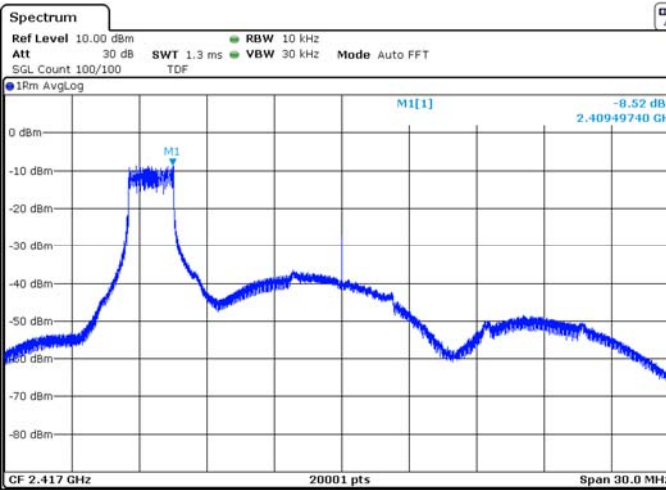

26T (RU Offset 8)

SU

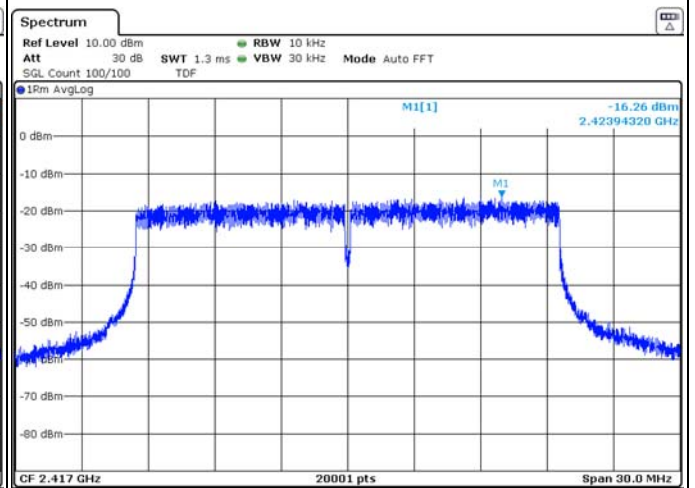
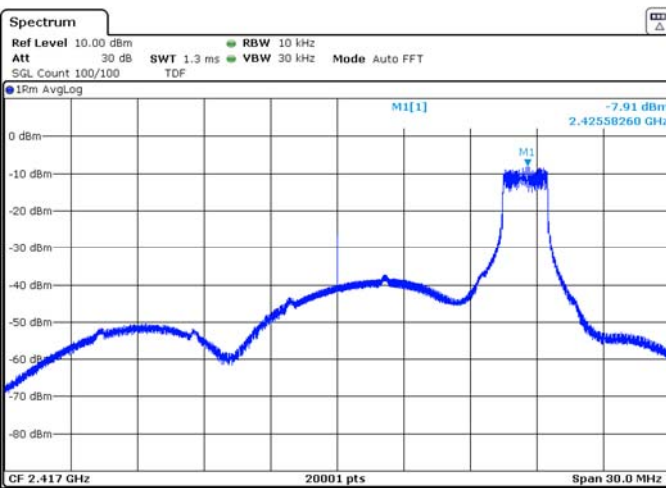




SISO_Antenna 2_802.11ax(HE20)_2 437 MHz



26T (RU Offset 0)

26T (RU Offset 4)

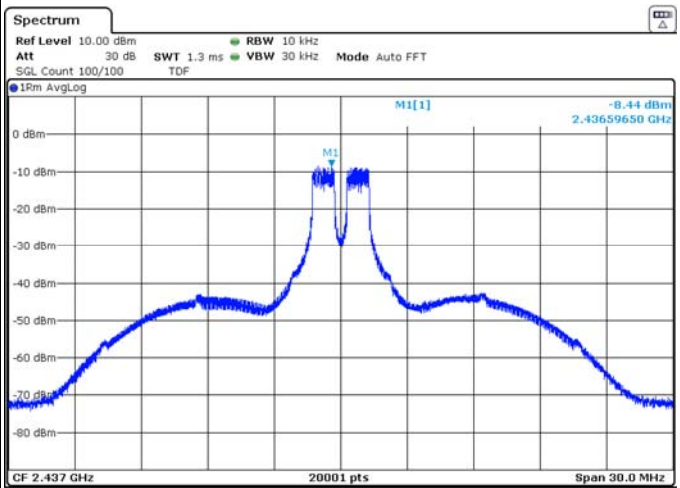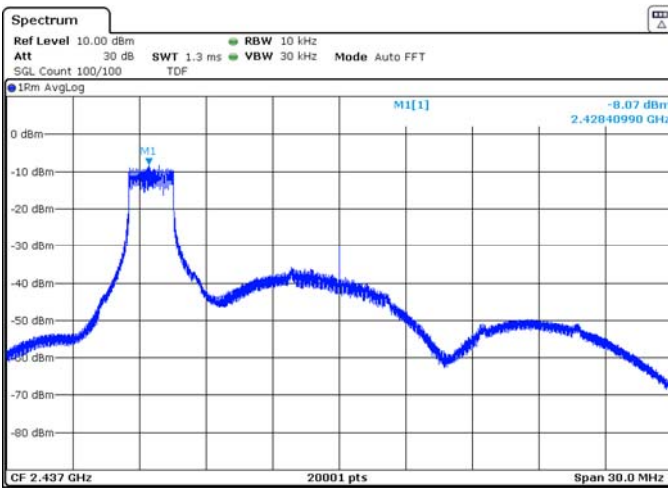

26T (RU Offset 8)

SU

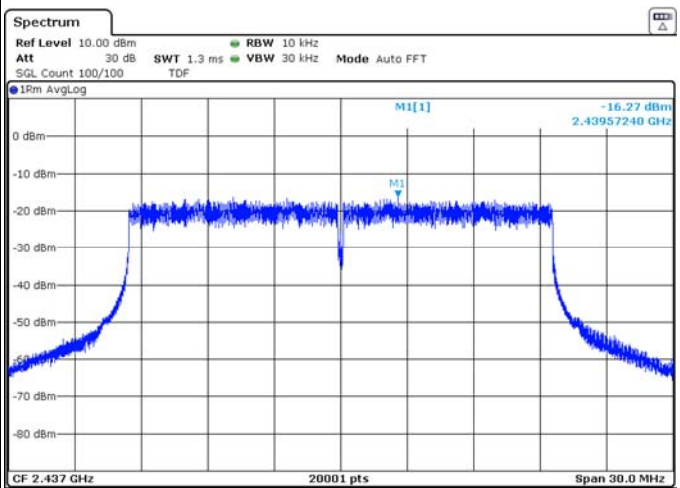
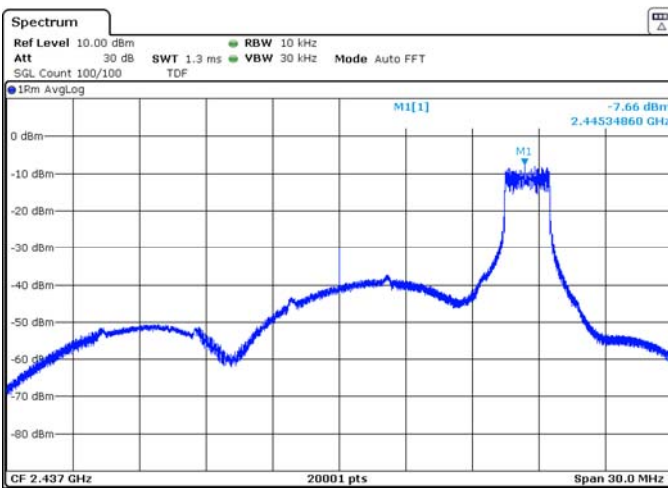




SISO_Antenna 2_802.11ax(HE20)_2 457 MHz



26T (RU Offset 0)

26T (RU Offset 4)

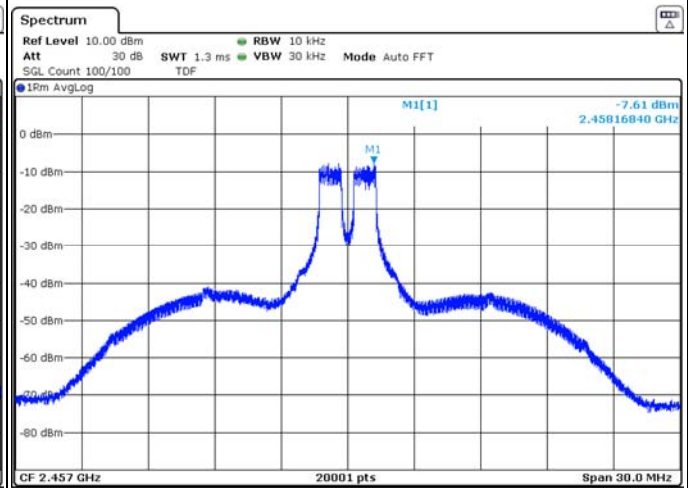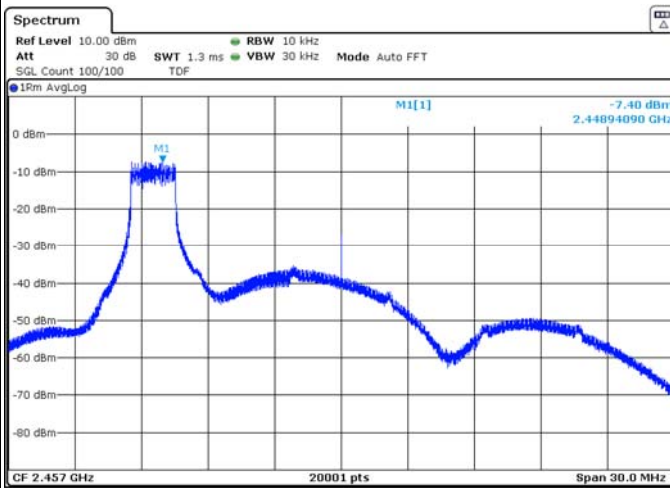

26T (RU Offset 8)

SU

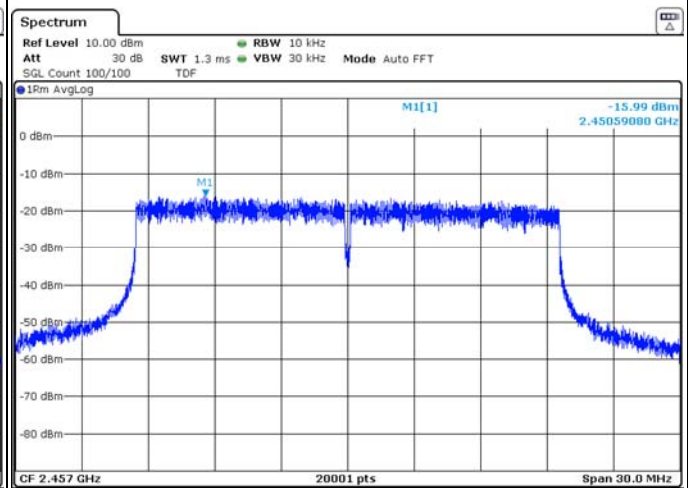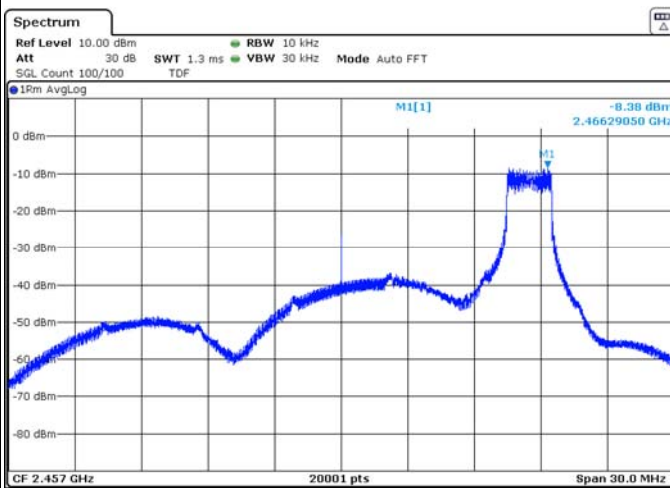





BUREAU
VERITAS

SISO_Antenna 2_802.11ax(HE20)_2 462 MHz



26T (RU Offset 0)

26T (RU Offset 4)

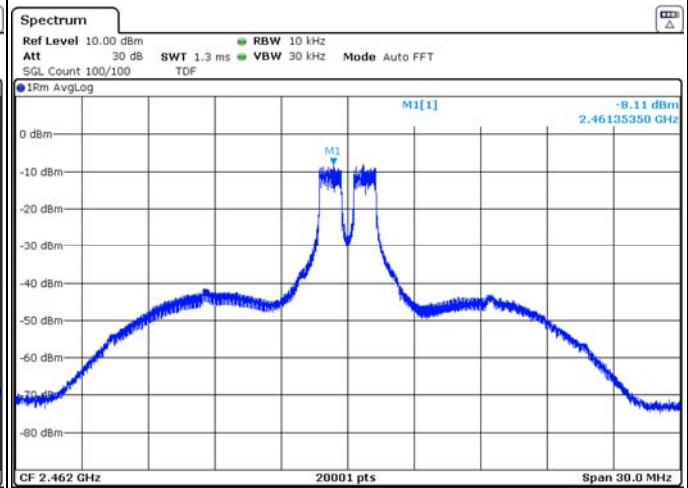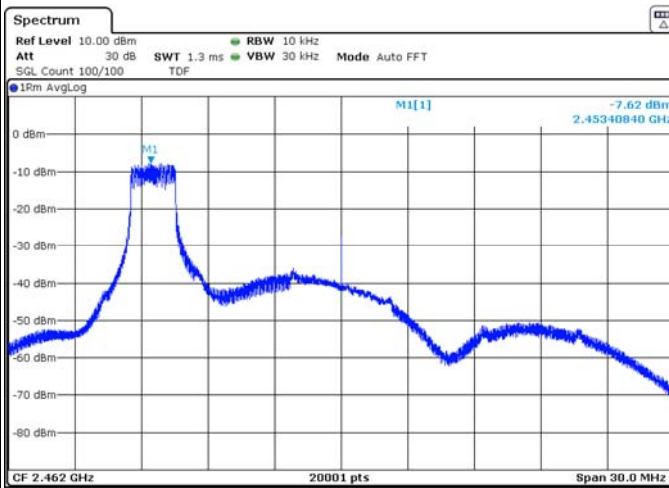

26T (RU Offset 8)


SU

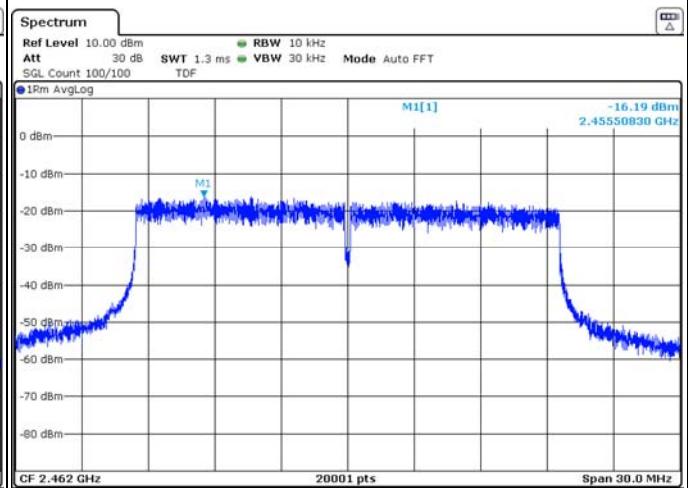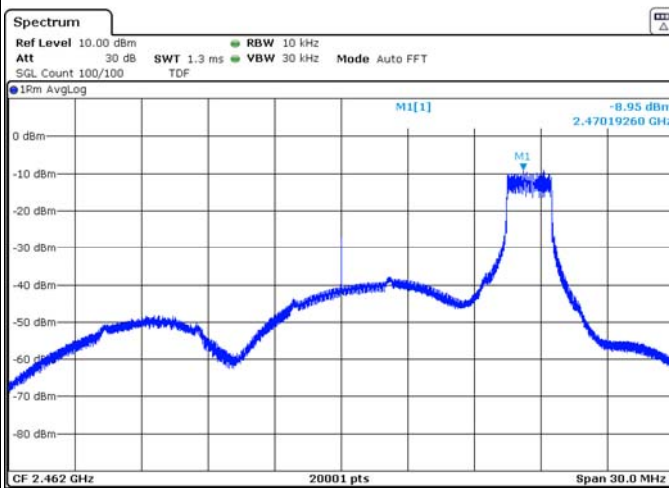




SISO_Antenna 2_802.11ax(HE20)_2 467 MHz


26T (RU Offset 0)

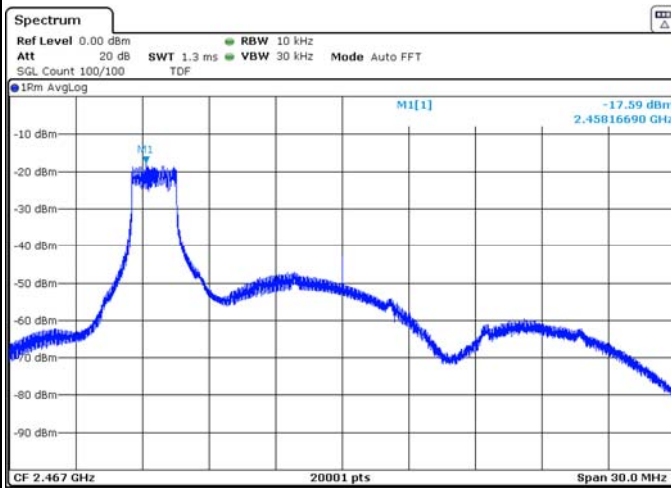


26T (RU Offset 4)

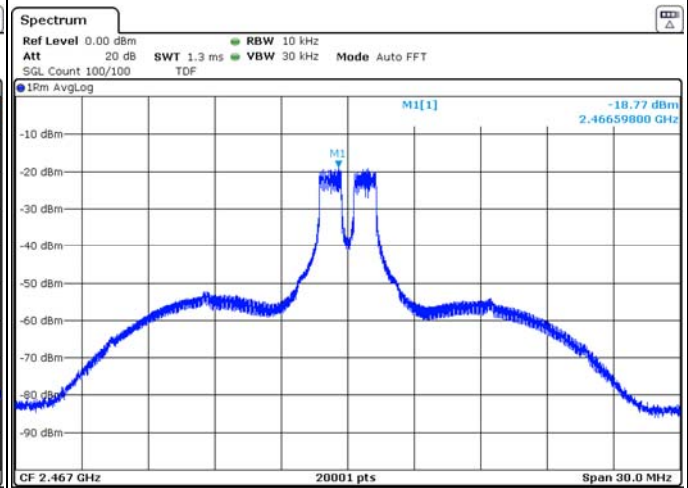

26T (RU Offset 8)

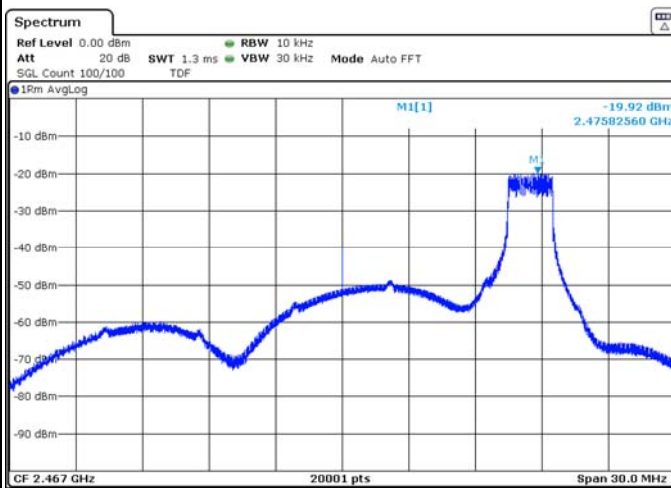

SU


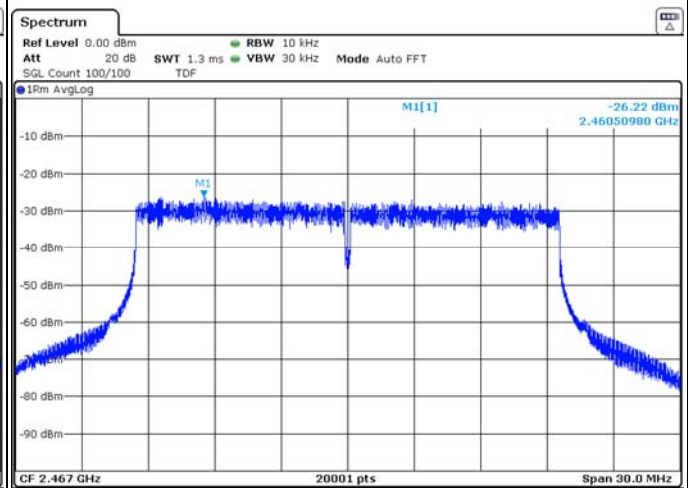




SISO_Antenna 2_802.11ax(HE20)_2 472 MHz



26T (RU Offset 0)

26T (RU Offset 4)

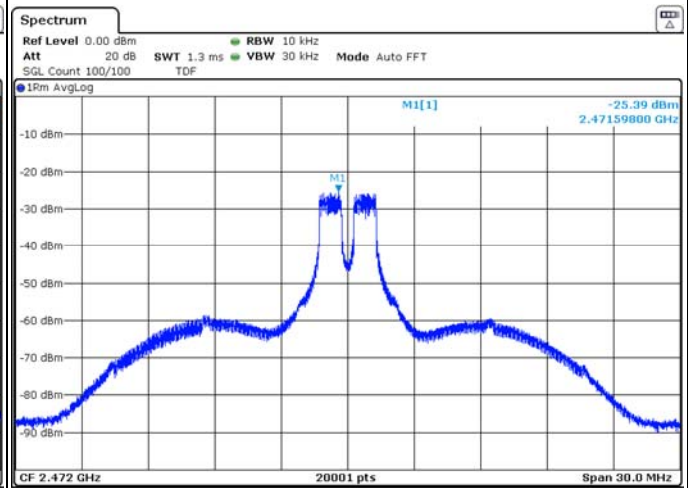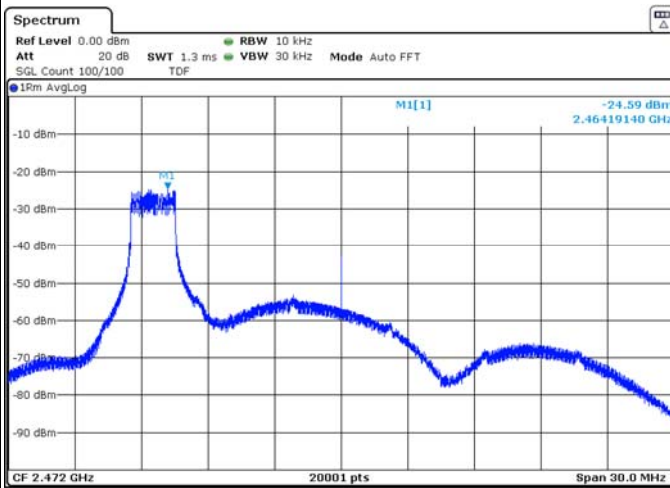

26T (RU Offset 8)

SU

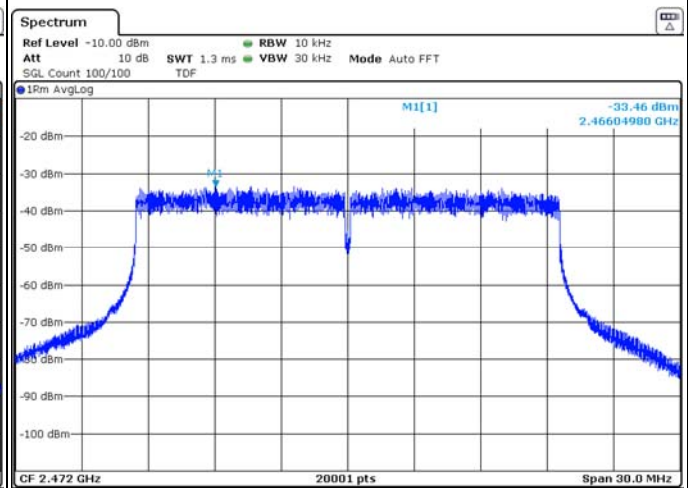
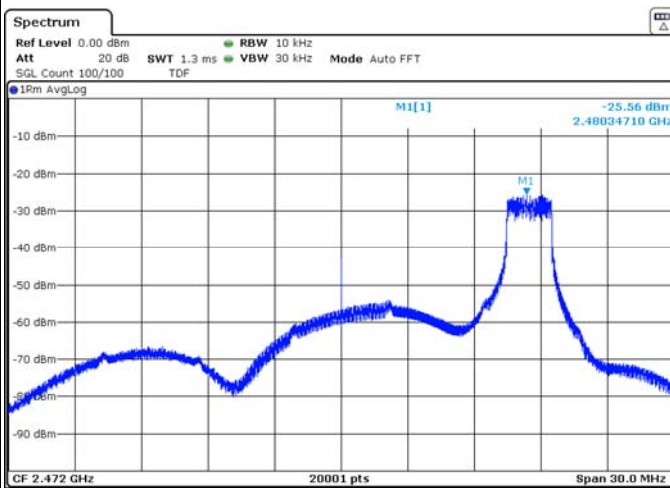




MIMO_Antenna 1_802.11ax(HE20)_2_412 MHz



26T (RU Offset 0)

26T (RU Offset 4)

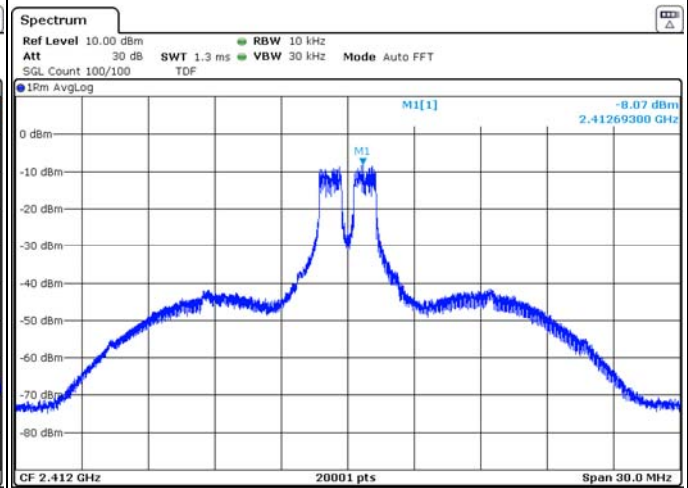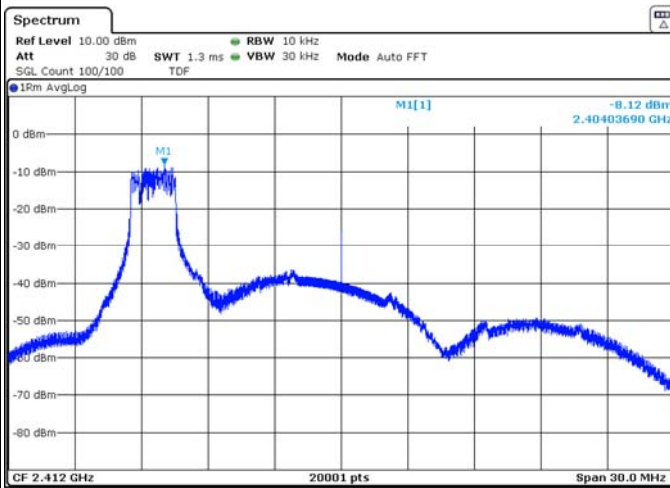

26T (RU Offset 8)

SU

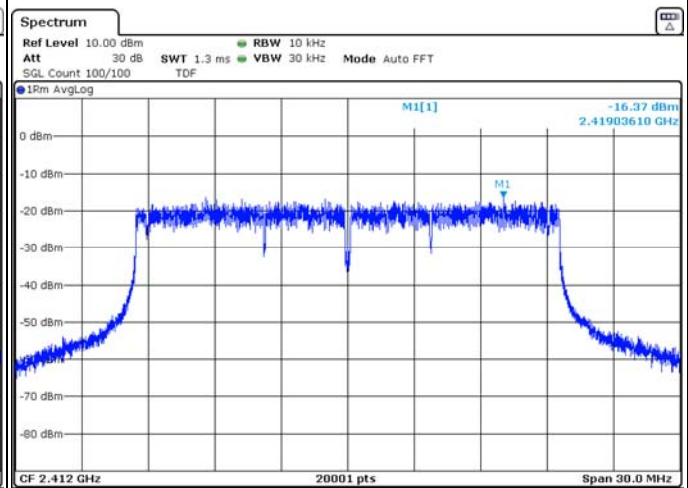
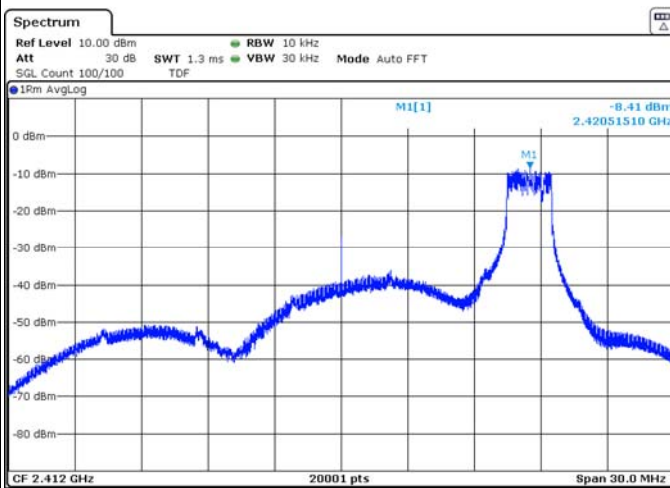




MIMO_Antenna 1_802.11ax(HE20)_2_417 MHz



26T (RU Offset 0)

26T (RU Offset 4)

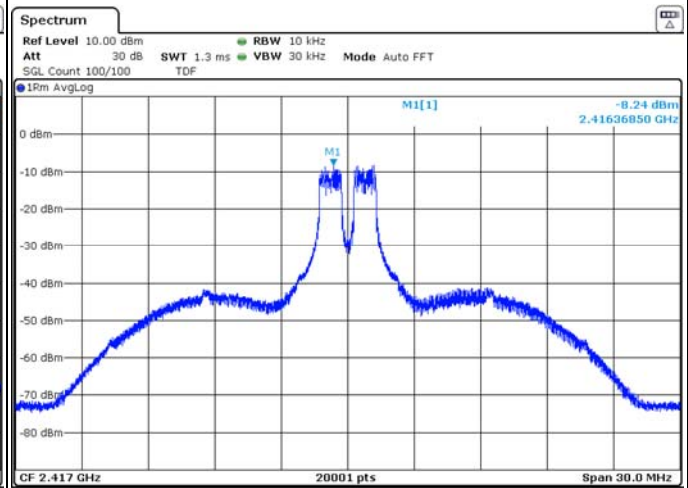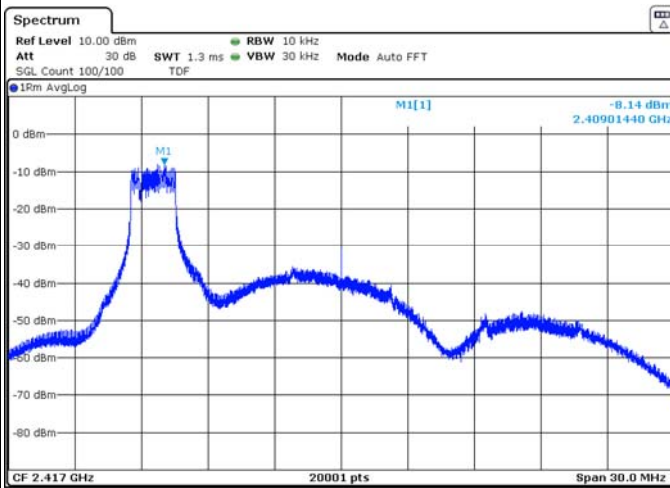

26T (RU Offset 8)

SU

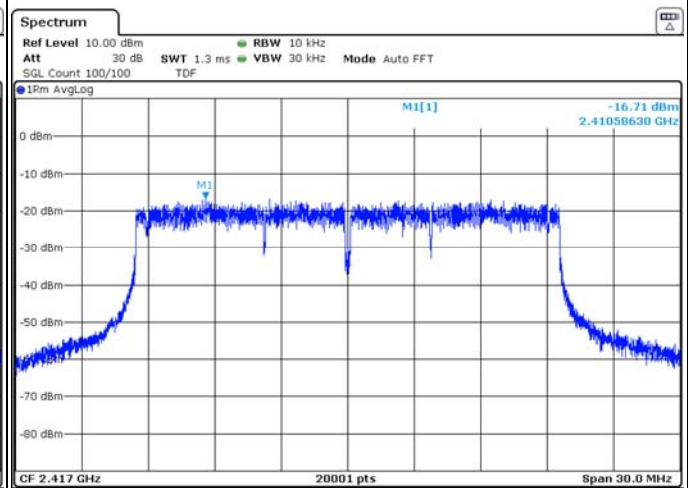
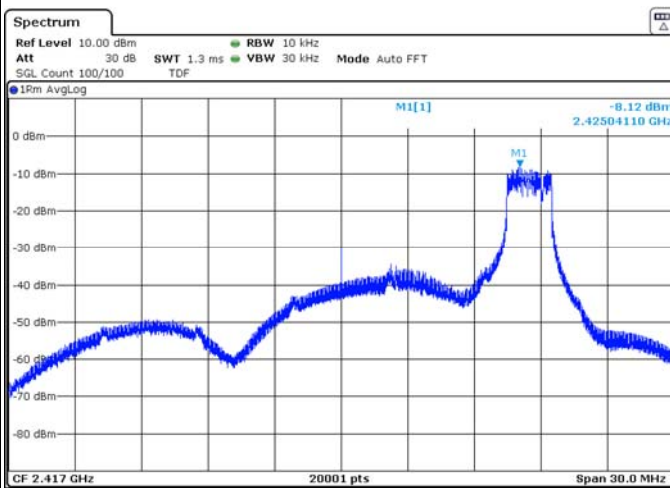




MIMO_Antenna 1_802.11ax(HE20)_2_437 MHz



26T (RU Offset 0)

26T (RU Offset 4)

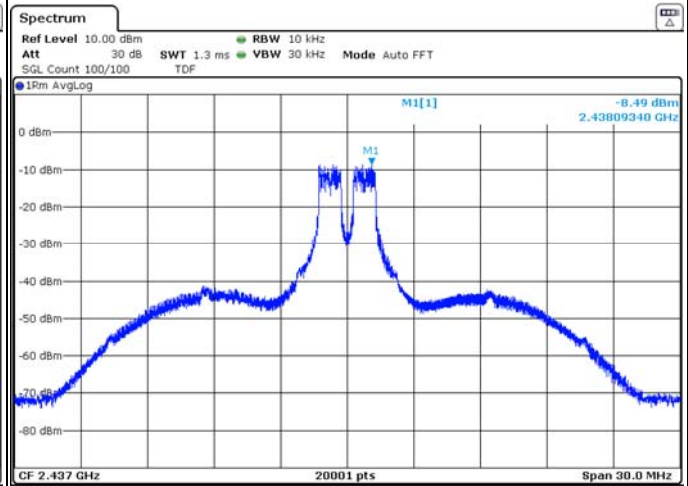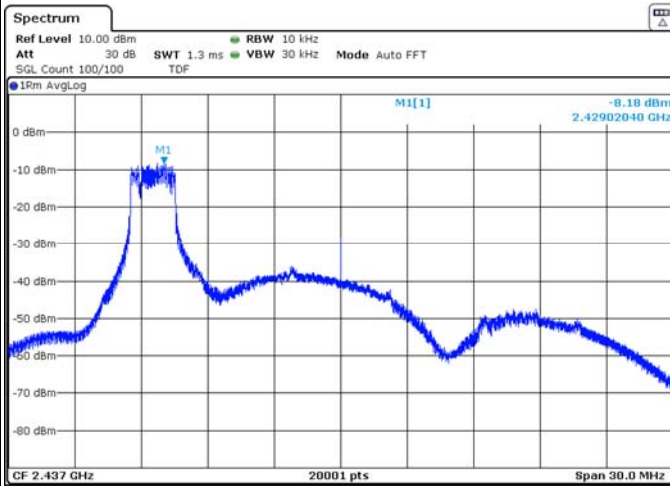

26T (RU Offset 8)

SU

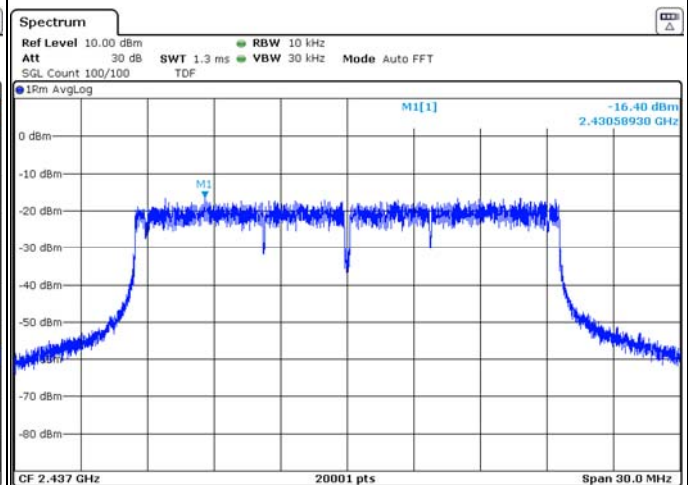
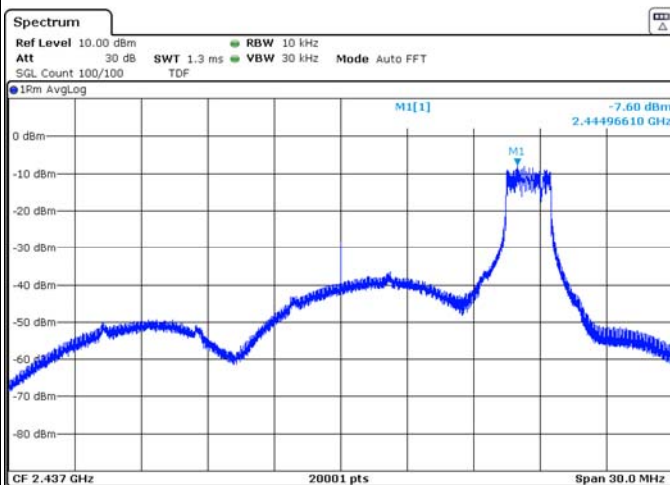




MIMO_Antenna 1_802.11ax(HE20)_2_457 MHz



26T (RU Offset 0)

26T (RU Offset 4)

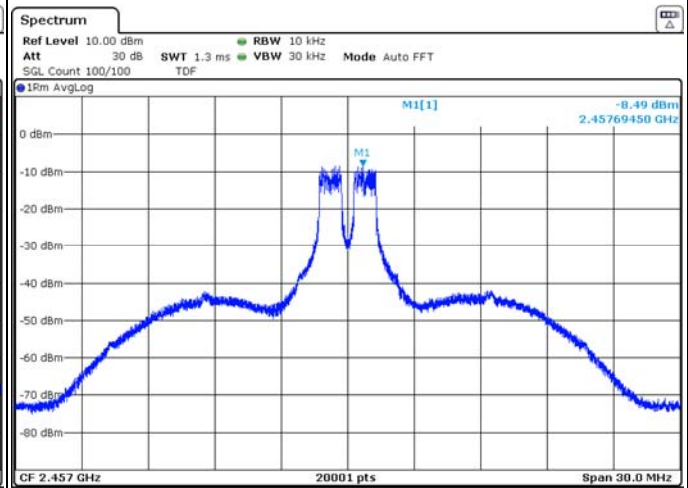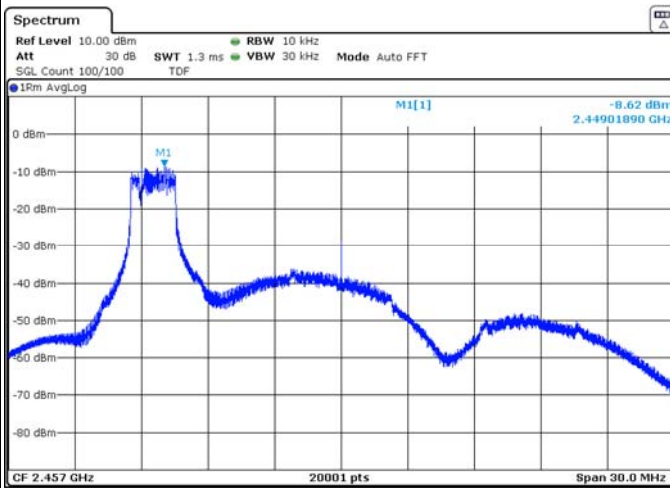

26T (RU Offset 8)

SU

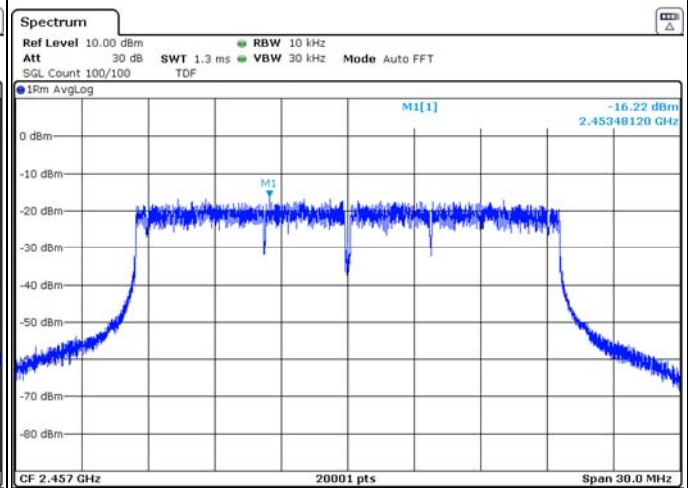
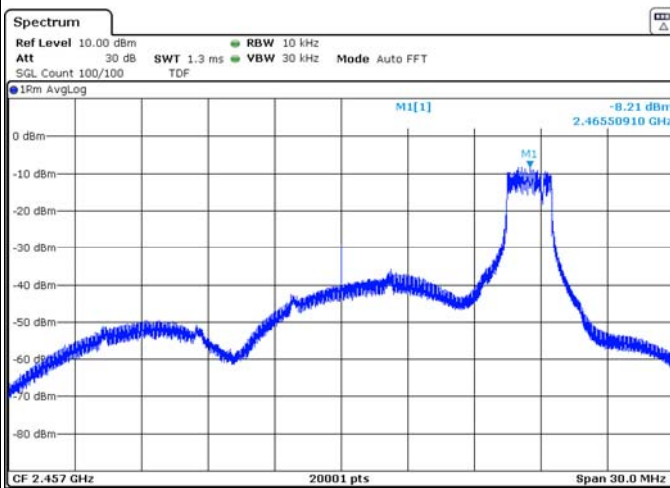




MIMO_Antenna 1_802.11ax(HE20)_2_462 MHz



26T (RU Offset 0)

26T (RU Offset 4)

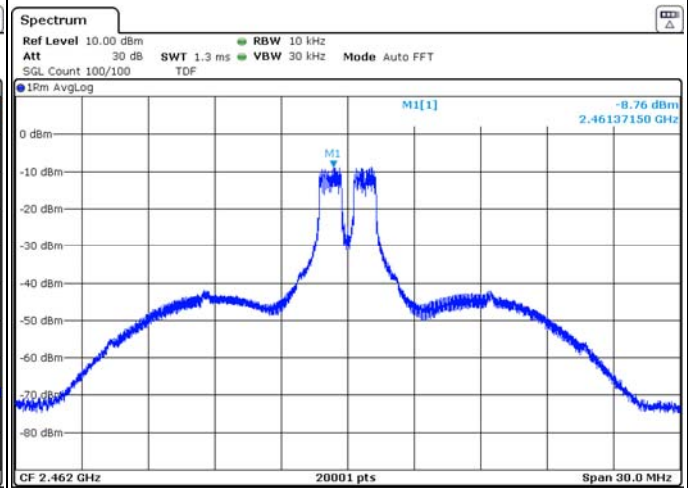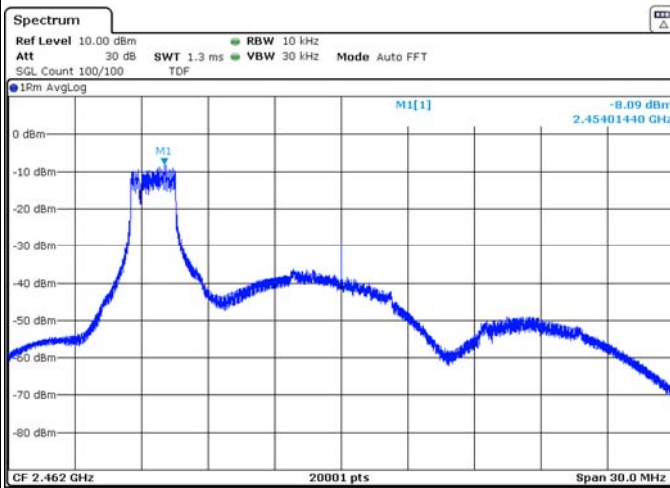

26T (RU Offset 8)

SU

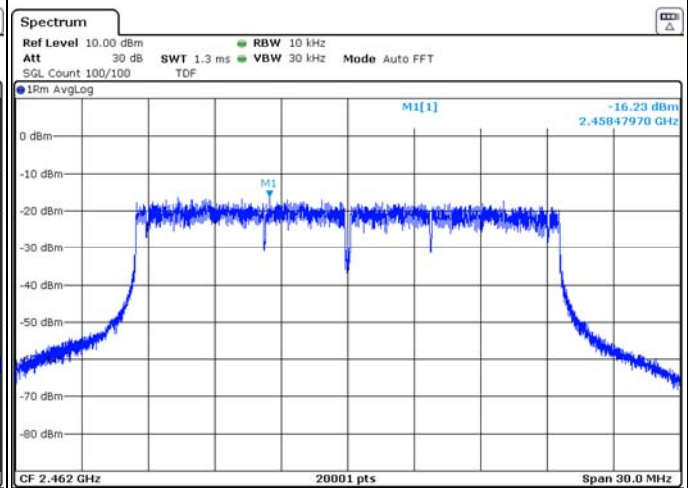
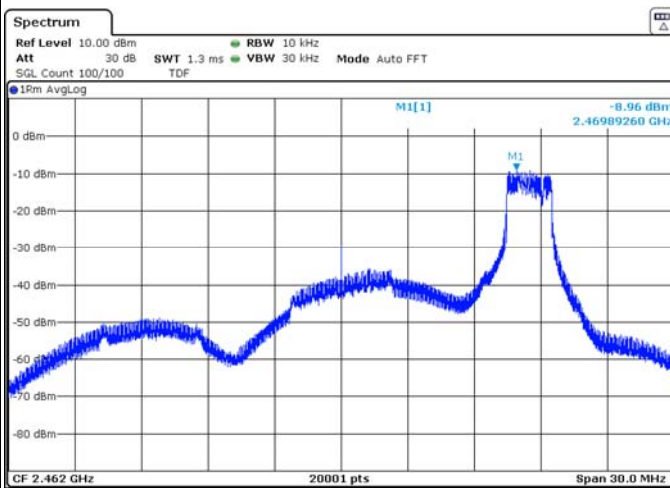




MIMO_Antenna 1_802.11ax(HE20)_2 467 MHz



26T (RU Offset 0)

26T (RU Offset 4)

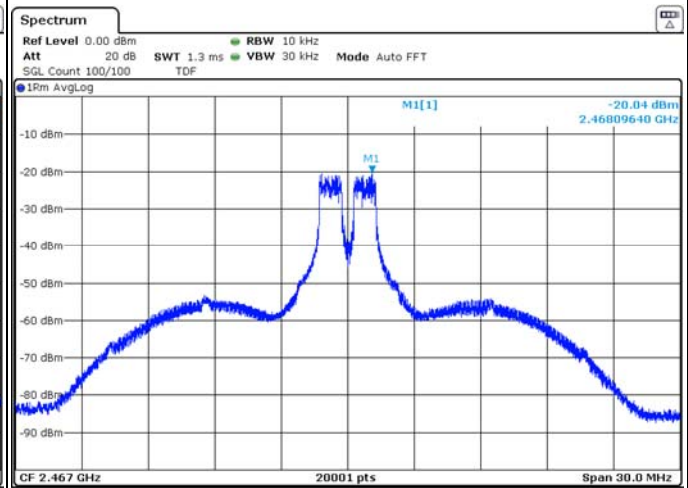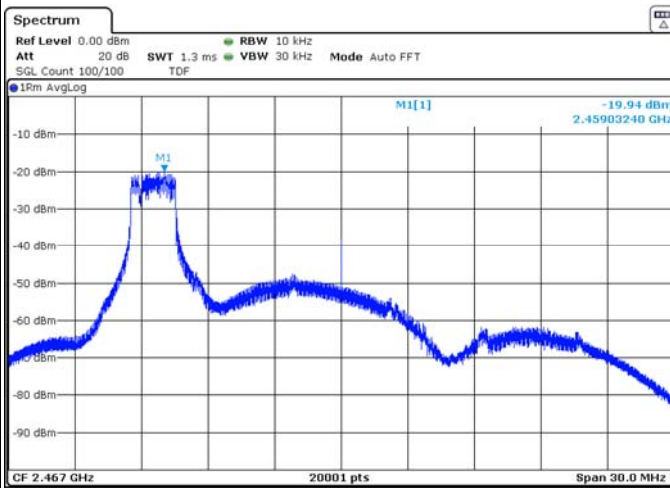

26T (RU Offset 8)


SU

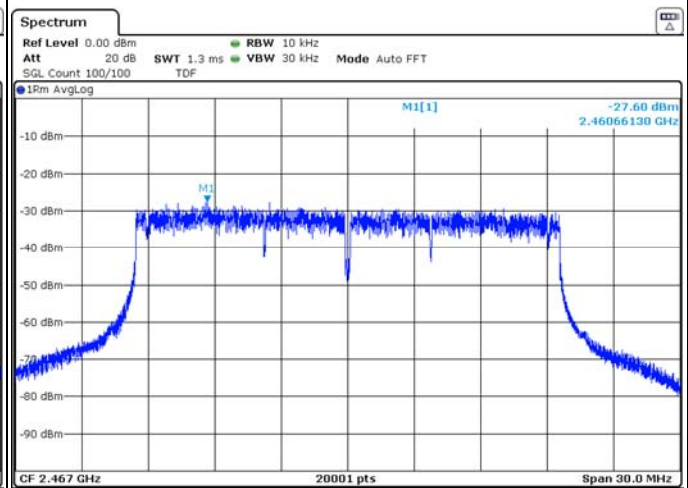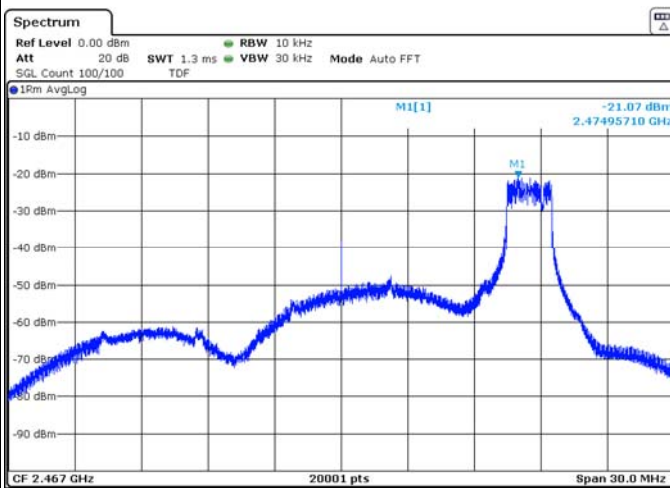




MIMO_Antenna 1_802.11ax(HE20)_2 472 MHz


26T (RU Offset 0)

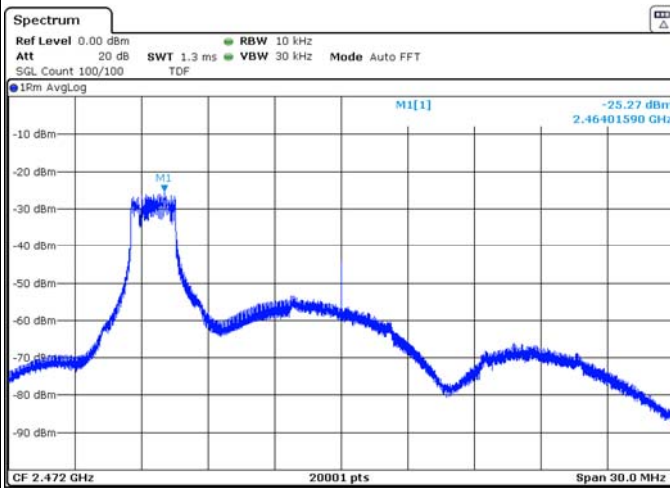


26T (RU Offset 4)

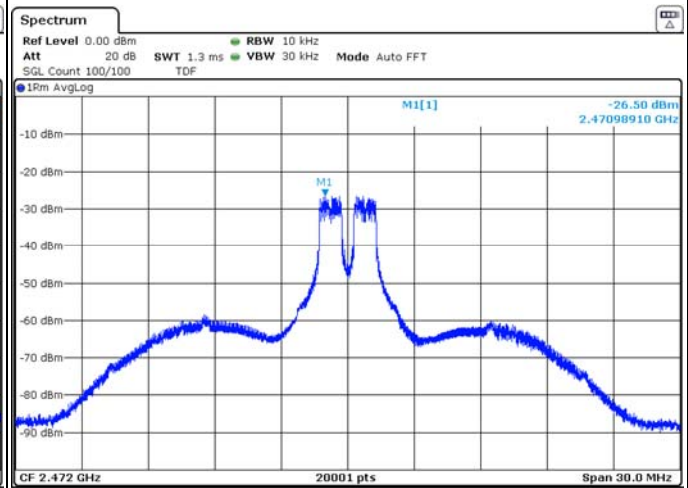

26T (RU Offset 8)

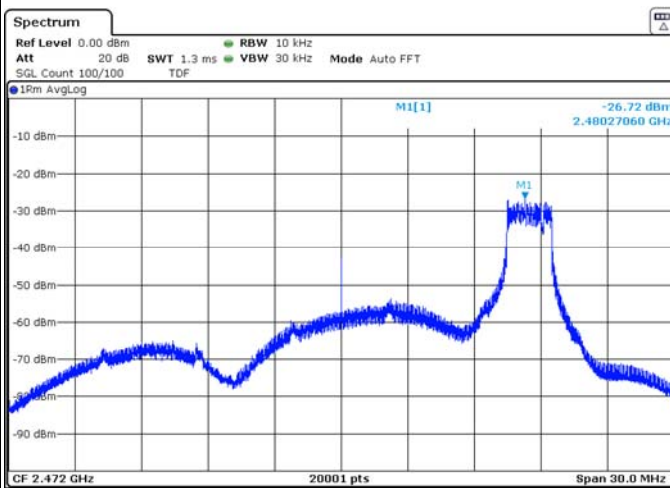

SU


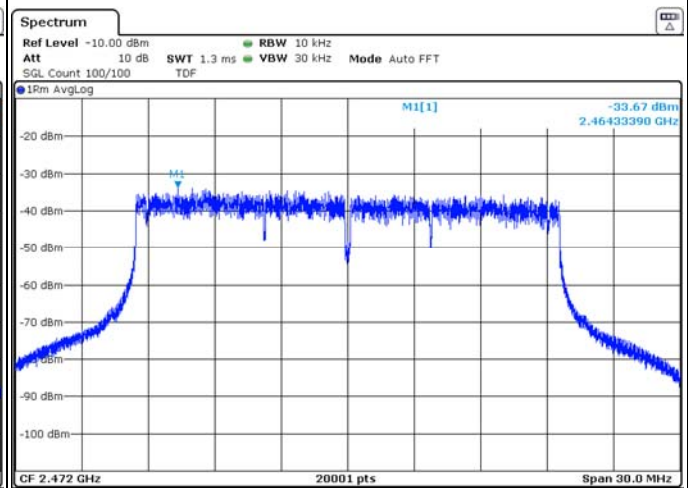




MIMO_Antenna 2_802.11ax(HE20)_2_412 MHz



26T (RU Offset 0)

26T (RU Offset 4)

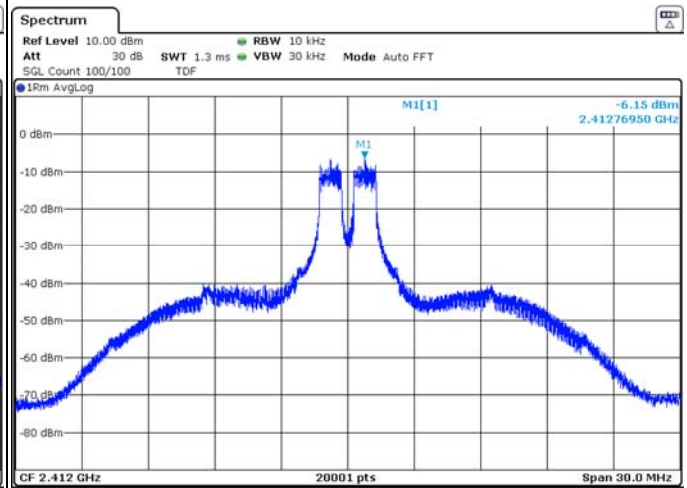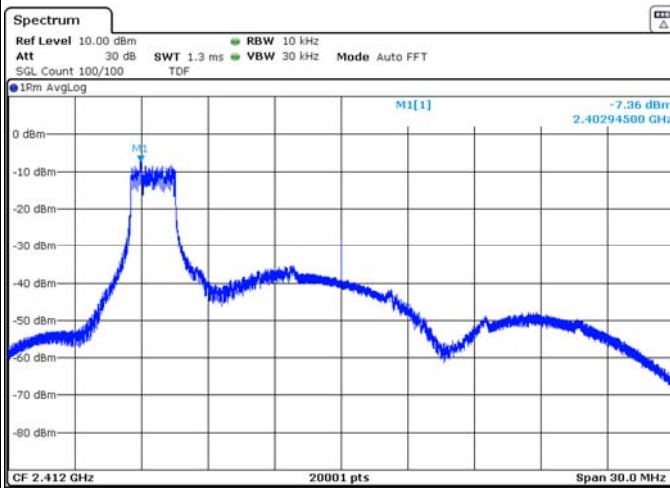

26T (RU Offset 8)

SU

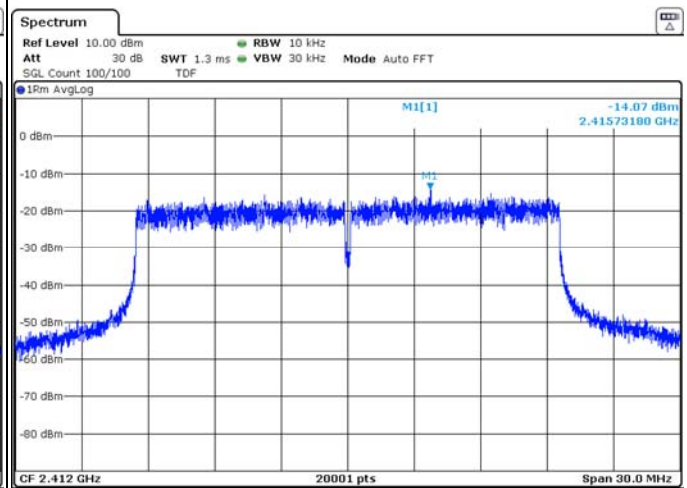
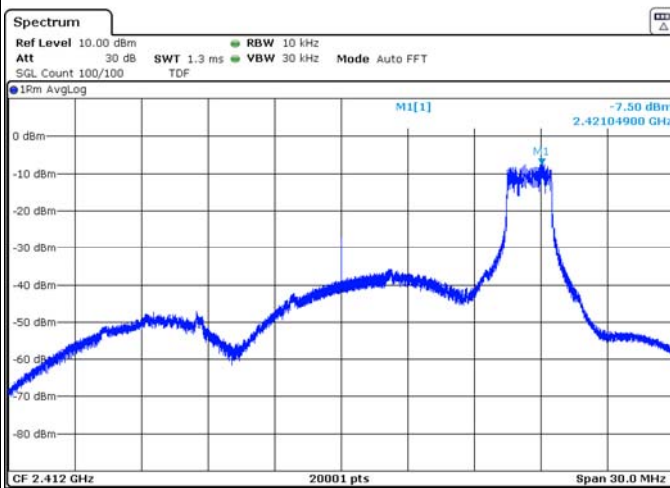




MIMO_Antenna 2_802.11ax(HE20)_2_417 MHz



26T (RU Offset 0)

26T (RU Offset 4)

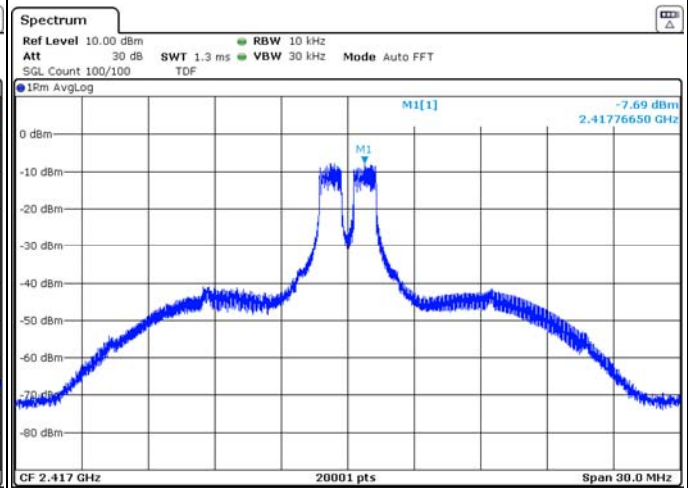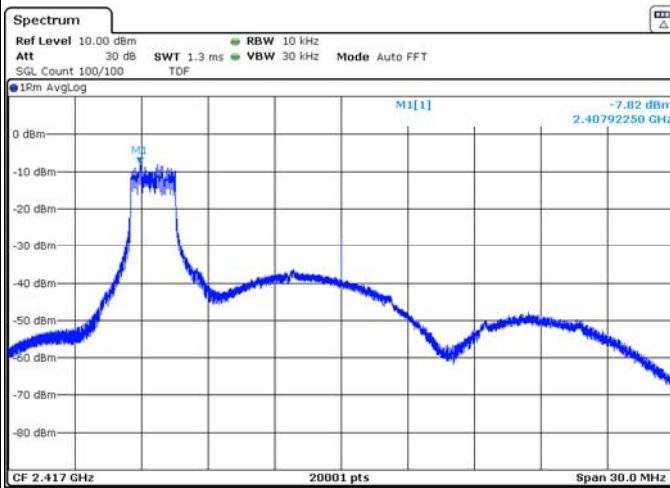

26T (RU Offset 8)

SU

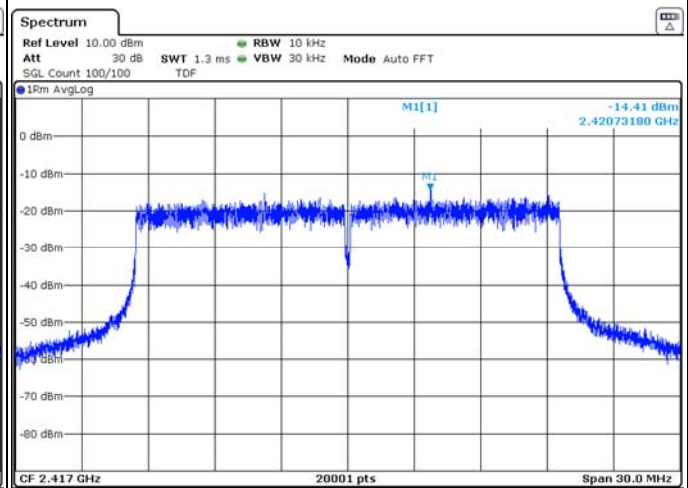
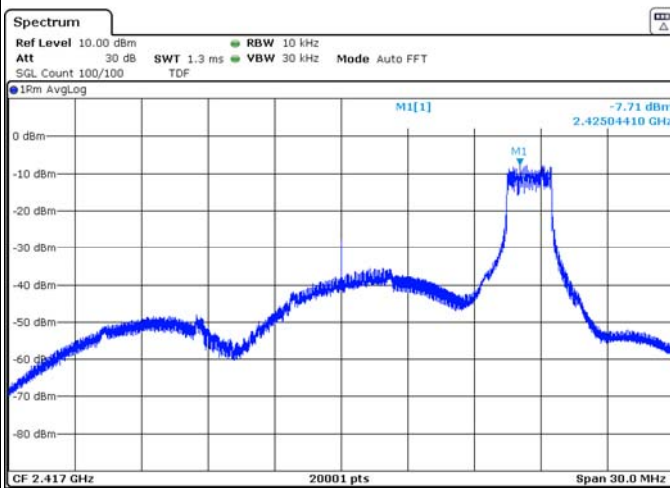




MIMO_Antenna 2_802.11ax(HE20)_2_437 MHz



26T (RU Offset 0)

26T (RU Offset 4)

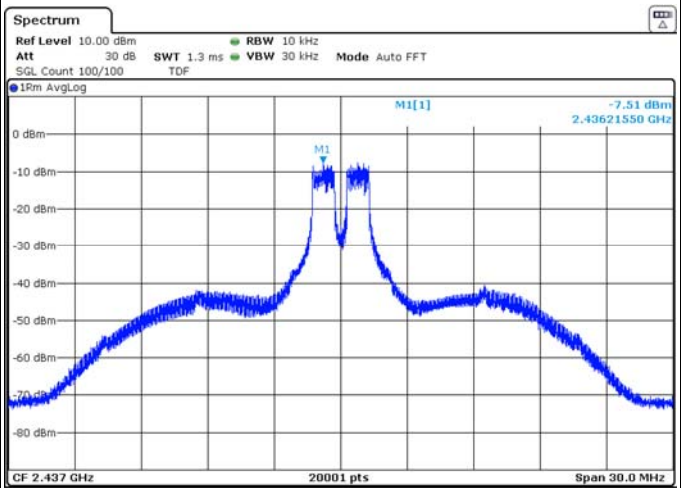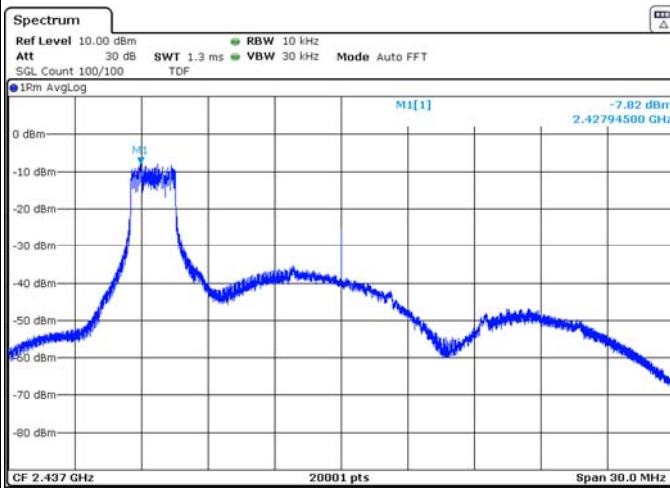

26T (RU Offset 8)

SU

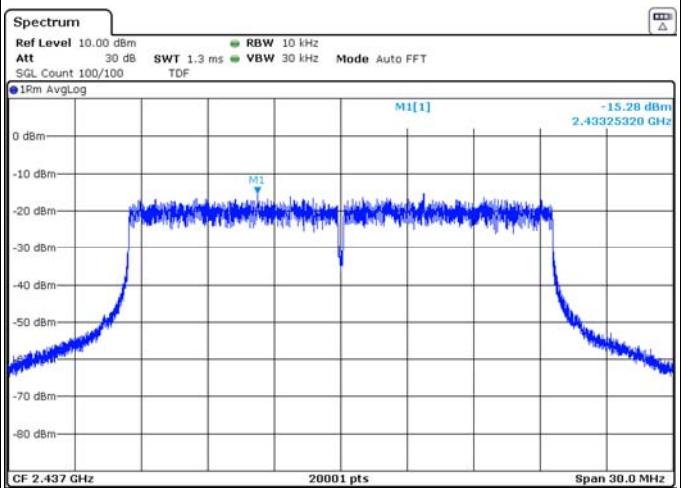
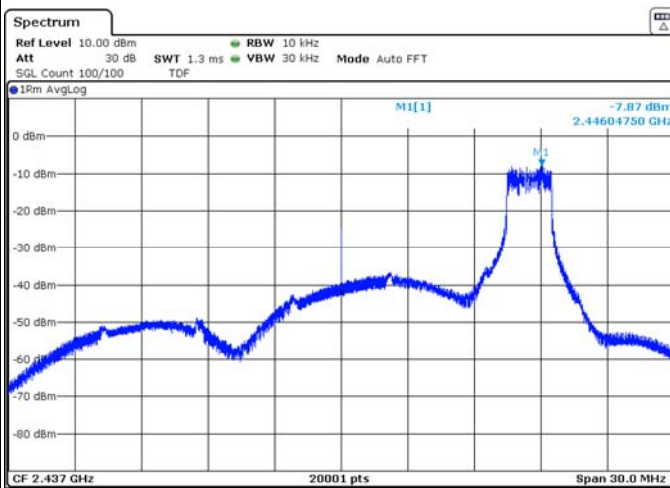




MIMO_Antenna 2_802.11ax(HE20)_2_457 MHz



26T (RU Offset 0)

26T (RU Offset 4)

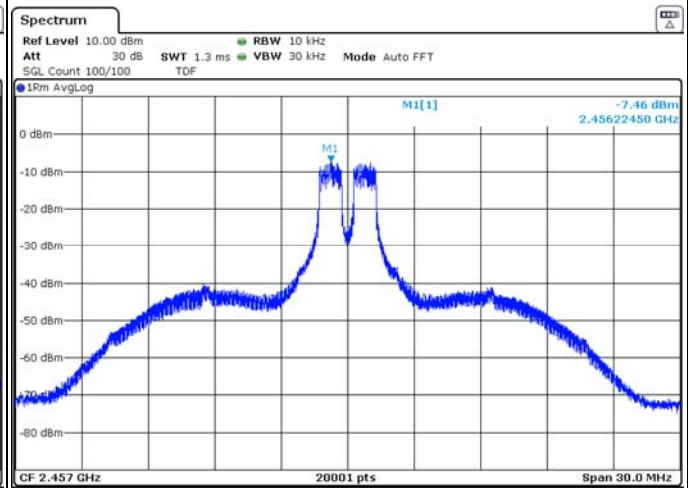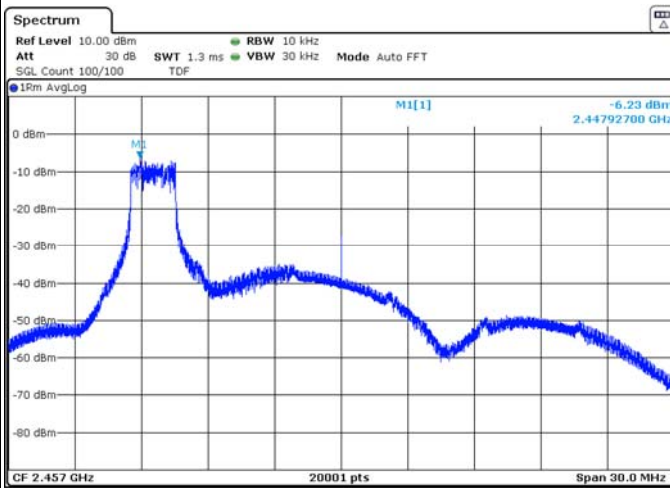

26T (RU Offset 8)

SU

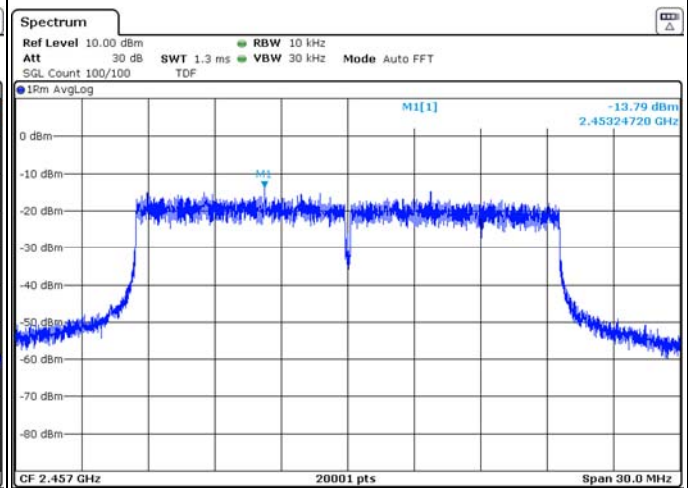
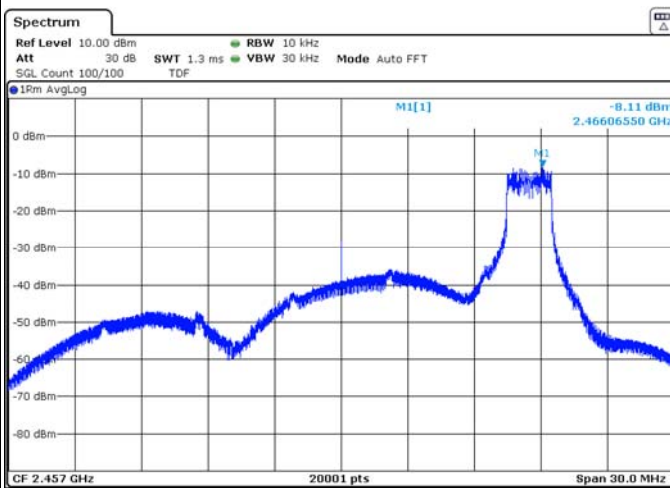




MIMO_Antenna 2_802.11ax(HE20)_2_462 MHz



26T (RU Offset 0)

26T (RU Offset 4)

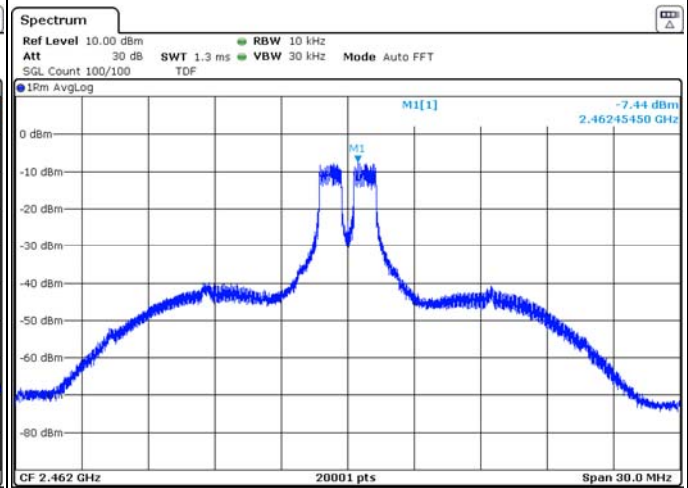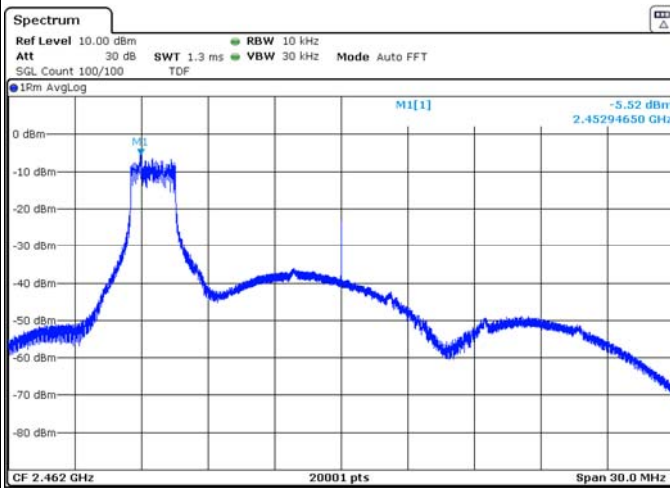

26T (RU Offset 8)

SU

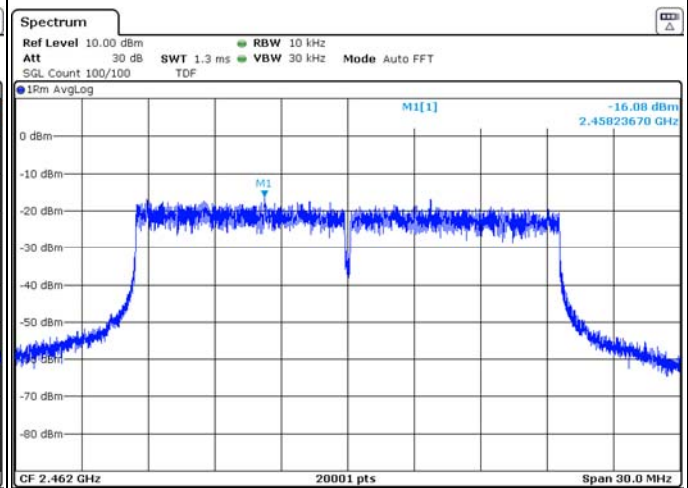
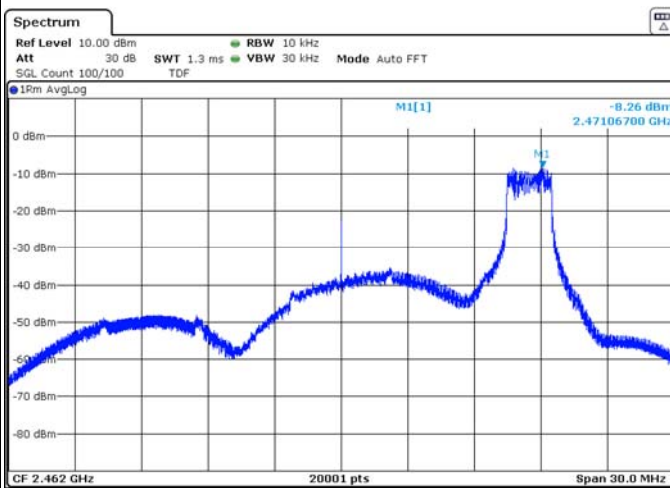




MIMO_Antenna 2_802.11ax(HE20)_2_467 MHz



26T (RU Offset 0)

26T (RU Offset 4)

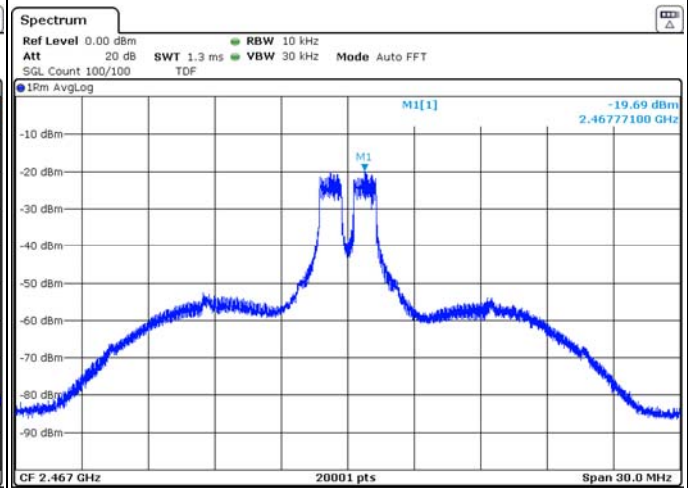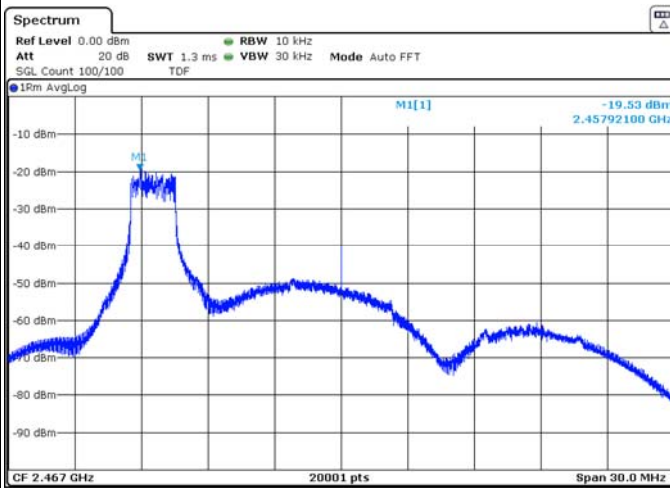

26T (RU Offset 8)

SU

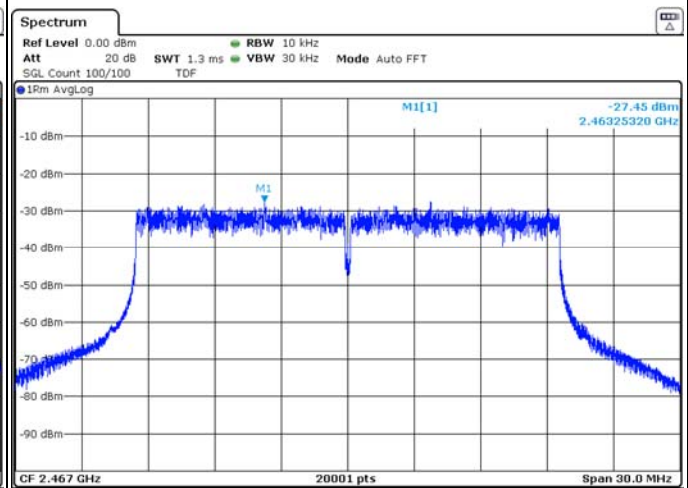
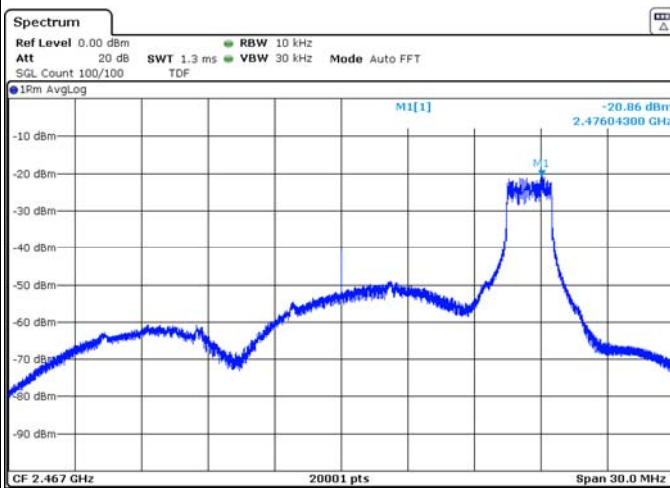




MIMO_Antenna 2_802.11ax(HE20)_2 472 MHz



26T (RU Offset 0)

26T (RU Offset 4)

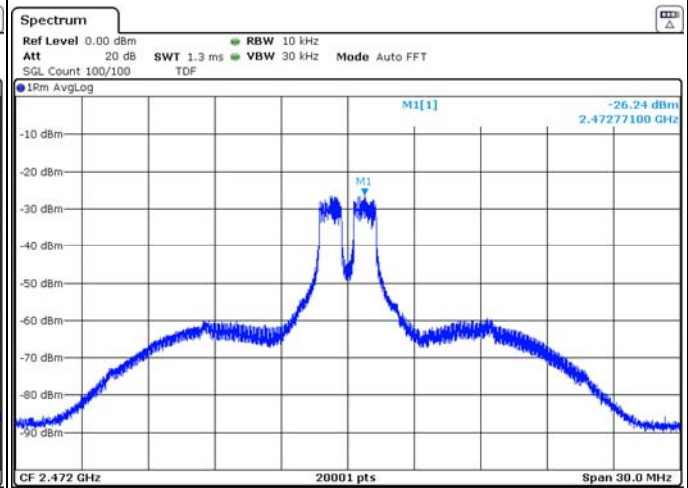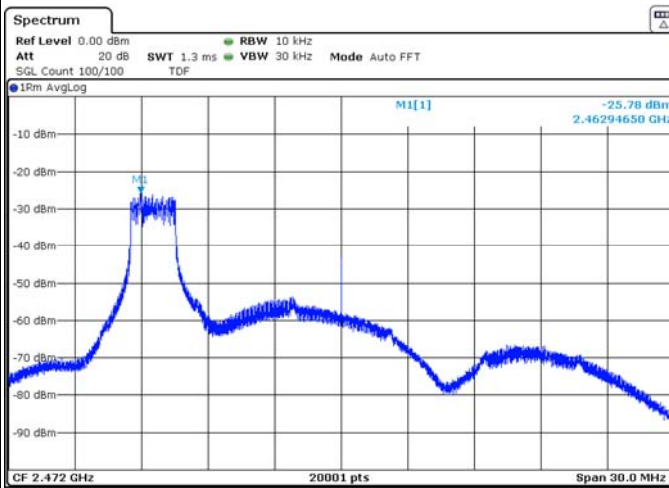

26T (RU Offset 8)

SU

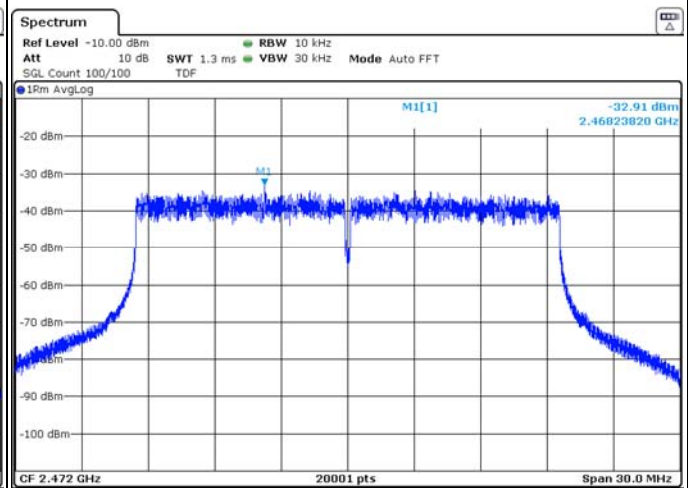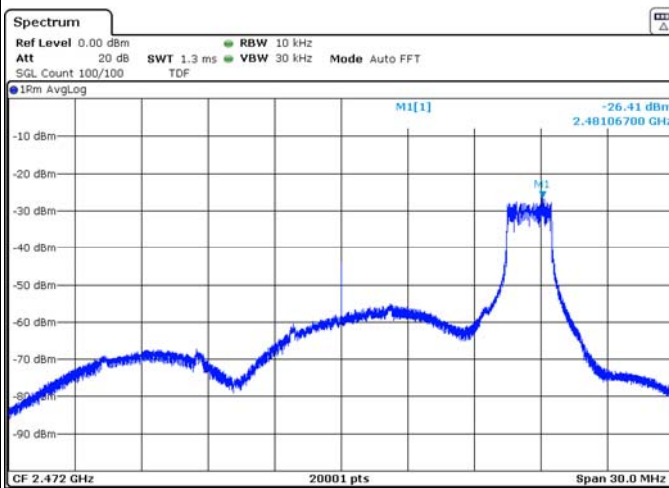

3.5 Spurious Emission, Band edge and Restricted Bands

3.5.1 Regulation

§15.247(d) : In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

§15.209(a) : Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

§15.205(a) : Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

§15.205 (b) : Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

3.5.2 Test Procedure

Band-edge Compliance for RF Conducted Emissions

These procedures are applicable for determining compliance at authorized-band band-edges where the requirements are expressed as a value relative to the in-band signal level. Procedures for determining compliance with field strength limits at or close to the band-edges are given in 6.10.6 (see also Table A.2).

Band-edge tests are typically performed as a conducted test but may be performed as radiated measurements on a test site meeting the specifications in 5.2, at the measurement distances specified in 5.3. The instrumentation shall meet the requirements in 4.1.1 using the bandwidths and detectors specified in 4.1.4.2.

When performing radiated measurements, the measurement antenna(s) shall meet the specifications in 4.3. The EUT shall be connected to an antenna and operated at the highest power settings following procedures in 6.3.

For other than frequency-hopping devices, this test sequence shall be performed once. For devices that support frequency hopping, this test sequence shall be performed twice: once with the hopping function turned OFF and then repeated with the hopping function turned ON. The purpose of the test with the hopping function turned on is to confirm that the RF power remains OFF while the device is changing frequencies, and that the oscillator stabilizes at the new frequency before RF power is turned back ON. Overshoot of any oscillator, including phase-lock-loop stabilized oscillators, can cause the device to be temporarily tuned to frequencies outside the authorized band, and it is important that no transmissions occur during such temporary periods. Particular attention to the hopping sequence requirements specified below is needed in the case of adaptive frequency-hopping devices:

- a) Connect the EMI receiver or spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described in step e) (be sure to enter all losses between the unlicensed wireless device output and the spectrum analyzer).
- b) Set the EUT to the lowest frequency channel (for the hopping on test, the hopping sequence shall include the lowest frequency channel).
- c) Set the EUT to operate at maximum output power and 100% duty cycle, or equivalent “normal mode of operation” as specified in 6.10.3.
- d) If using the radiated method, then use the applicable procedure(s) of 6.4, 6.5, or 6.6, and orient the EUT and measurement antenna positions to produce the highest emission level.
- e) Perform the test as follows:
 - 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
 - 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
 - 3) Attenuation: Auto (at least 10 dB preferred).
 - 4) Sweep time: Coupled.
 - 5) Resolution bandwidth: 100 kHz.
 - 6) Video bandwidth: 300 kHz.
 - 7) Detector: Peak.
 - 8) Trace: Max hold.
- f) Allow the trace to stabilize. For the test with the hopping function turned ON, this can take several minutes to achieve a reasonable probability of intercepting any emissions due to oscillator overshoot.

- g) Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- h) Repeat step c) through step e) for every applicable modulation.
- i) Set the EUT to the highest frequency channel (for the hopping on test, the hopping sequence shall include the highest frequency channel) and repeat step c) through step d).
- j) The band-edge measurement shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Spurious RF Conducted Emissions

Conducted spurious emissions shall be measured for the transmit frequency, per 5.5 and 5.6, and at the maximum transmit powers.

Connect the primary antenna port through an attenuator to the spectrum analyzer input; in the results, account for all losses between the unlicensed wireless device output and the spectrum analyzer. The instrument shall span 30 MHz to 10 times the operating frequency in GHz, with a resolution bandwidth of 100 kHz, video bandwidth of 300 kHz, and a coupled sweep time with a peak detector. The band 30 MHz to the highest frequency may be split into smaller spans, as long as the entire spectrum is covered.

Spurious Radiated Emissions

1. The preliminary radiated measurement were performed to determine the frequency producing the maximum emissions in an semi-anechoic chamber at a distance of 3 meters.
2. The EUT was placed on the top of the 0.8-meter height, 1 x 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.
3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 9 kHz to 30 MHz using the loop antenna, and from 30 to 1000 MHz using the Bi-Log antenna, and from 1000 MHz to 26500 MHz using the horn antenna.
4. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 4 x 4 meter in an semi-anechoic chamber. The EUT was tested at a distance 3 meters.
5. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector fuction with specified bandwidth.
6. The 0.8 m height is for below 1 GHz testing, and 1.5 m is for above 1GHz testing.

- Procedure for unwanted emissions measurements below 1 000 MHz

The procedure for unwanted emissions measurements below 1 000 MHz is as follows:

- a) Follow the requirements in 12.7.4.
- b) Compliance shall be determined using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

- Procedure for peak unwanted emissions measurements above 1 000 MHz

The procedure for peak unwanted emissions measurements above 1 000 MHz is as follows:

- a) Follow the requirements in 12.7.4.
- b) Peak emission levels are measured by setting the instrument as follows:
 - 1) RBW = 1 MHz.
 - 2) VBW \geq [3 \times RBW].
 - 3) Detector = peak.
 - 4) Sweep time = auto.
 - 5) Trace mode = max hold.
 - 6) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, then the time required for the trace to stabilize will increase by a factor of approximately 1 / D, where D is the duty cycle. For example, at 50 % duty cycle, the measurement time will increase by a factor of two, relative to measurement time for continuous transmission.

- Procedure for average unwanted emissions measurements above 1 000 MHz

Method VB-A is averaging using reduced video bandwidth. The procedure for this method is as follows:

- a) RBW = 1 MHz.
- b) Video bandwidth:
 - 1) If the EUT is configured to transmit with $D \geq 98\%$, then set $VBW \leq RBW / 100$ (i.e., 10 kHz), but not less than 10 Hz.
 - 2) If the EUT D is $< 98\%$, then set $VBW \geq 1 / T$, where T is defined in item a1) of 12.2.

- c) Video bandwidth mode or display mode:
- 1) The instrument shall be set with video filtering applied in the power domain. Typically, this requires setting the detector mode to RMS (power averaging) and setting the average-VBW type to power (rms).
 - 2) As an alternative, the instrument may be set to linear detector mode. Video filtering shall be applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode to accomplish this. Others have a setting for average-VBW type, which can be set to “voltage” regardless of the display mode.
- d) Detector = peak.
- e) Sweep time = auto.
- f) Trace mode = max hold.
- g) Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 % duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where D is the duty cycle. For example, use at least 200 traces if the duty cycle is 25 %. (If a specific emission is demonstrated to be continuous—i.e., 100 % duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 50 traces should be averaged.)


- Sample Calculation

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m] + Duty Cycle Correction [dB]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable loss [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]


3.5.3 Deviation from Test Standard

No deviation.



3.5.4 Test Setup

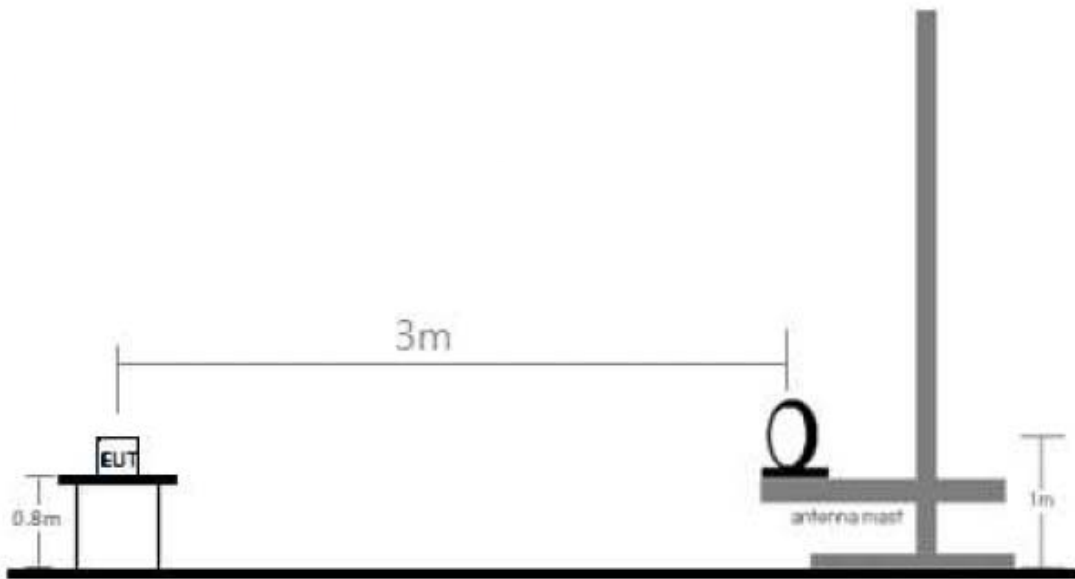

[Radiated Emission Test Setup Below 30 MHz]

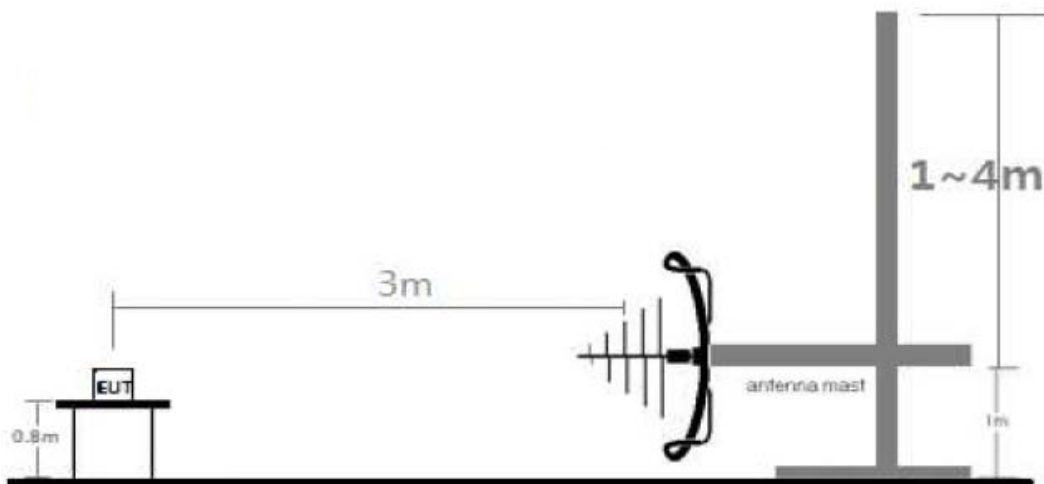


[Radiated Emission Test Setup Below 1 GHz]

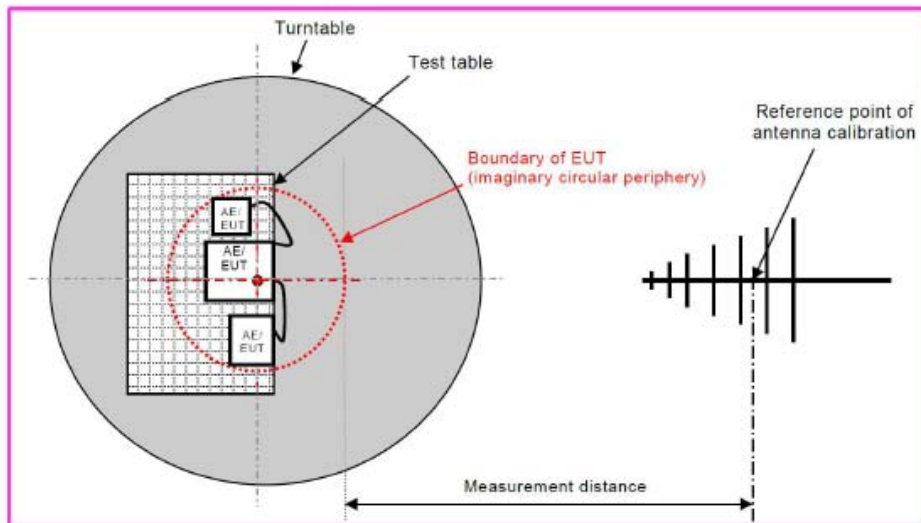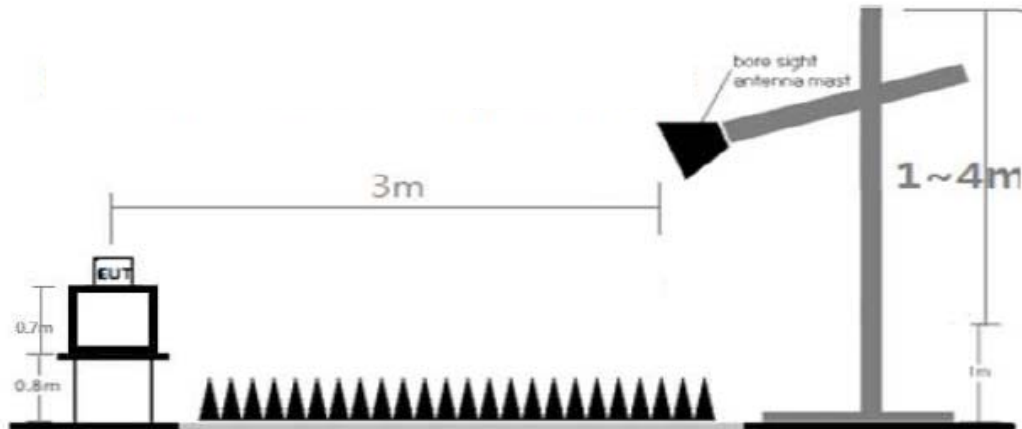

[Radiated Emission Test Setup Above 1 GHz]


Spectrum Analyzer

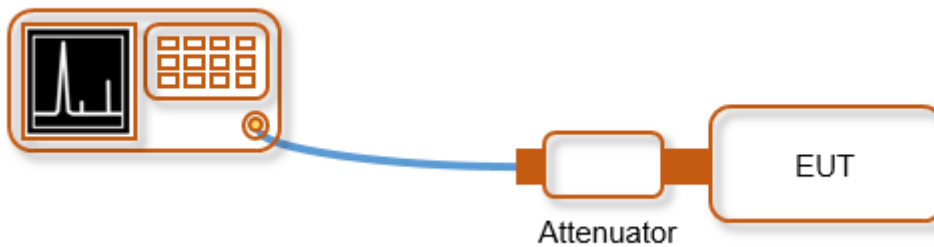

[Conducted Spurious Emission]

3.5.5 Test Result of Radiated Spurious Emission

3.5.5.1 Radiated Emissions (Below 30 MHz)

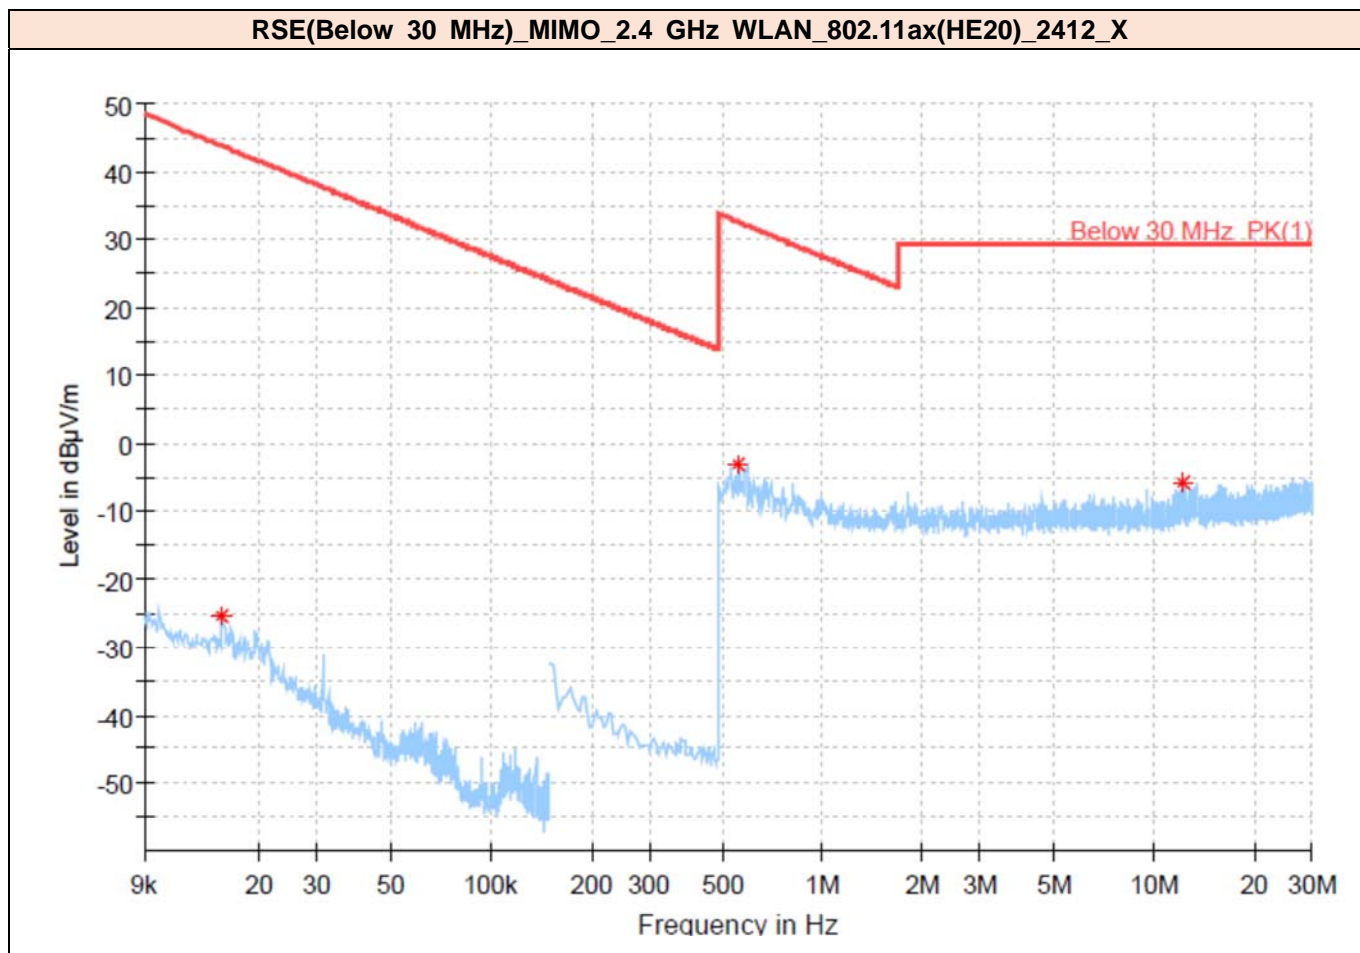


Frequency [MHz]	Peak Reading Value [dBuV/m]	Peak [dBuV/m]	Peak Reading Value [dBuA/m]	Peak [dBuA/m]	Quasi Reading Value [dBuV/m]	Quasi Peak [dBuV/m]	Distance Factor [dB]	Limit [dBuV/m]	Limit [dBuA/m]	Margin [dB]	Height [cm]	Pol	Azimuth [deg]	Correction Factor [dB]
0.02	34.24	-25.36	-17.26	-76.86	-	-	-80	43.82	-7.68	69.18	100	H	247	-59.60
0.56	16.60	-3.10	-34.90	-54.60	-	-	-40	32.65	-18.85	35.75	100	H	348	-19.70
12.31	12.50	-6.00	-39.00	-57.50	-	-	-40	29.54	-21.96	35.54	100	H	34	-18.50

Remarks

1. Peak(dBuV/m) = Peak Reading Value(dBuV/m) + Correction Factor(dB) + Distance Factor(dB)
2. Peak(dBuA/m) = Peak(dBuV/m) - 51.5 dB(Conversion Factor)
3. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
4. Margin(dB) = (Peak) Result (dBuA/m) – (Peak) Limit (dBuA/m)



RSE(Below 30 MHz)_SISO_ANT2_2.4 GHz WLAN_802.11ax(HE20)_2412_X

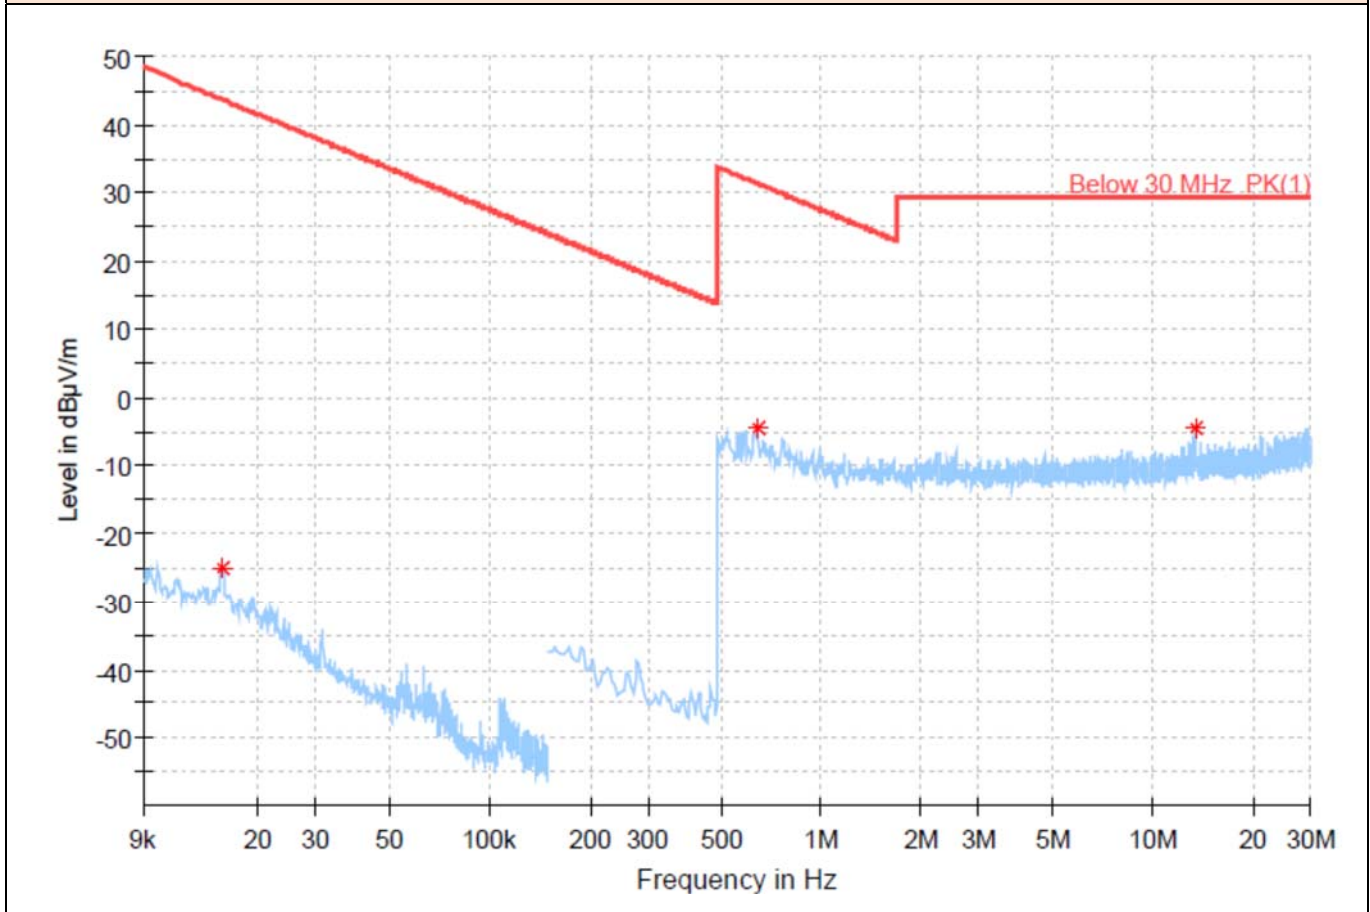


Frequency [MHz]	Peak Reading Value [dBµV/m]	Peak [dBµV/m]	Peak Reading Value [dBµA/m]	Peak [dBµA/m]	Quasi Reading Value [dBµV/m]	Quasi Peak [dBµV/m]	Distance Factor [dB]	Limit [dBµV/m]	Limit [dBµA/m]	Margin [dB]	Height [cm]	Pol	Azimuth [deg]	Correction Factor [dB]
0.02	34.42	-25.18	-17.08	-76.68	-	-	-80	43.77	-7.73	68.95	100	H	243	-59.60
0.64	14.99	-4.61	-36.51	-56.11	-	-	-40	31.44	-20.06	36.06	100	H	258	-19.60
13.44	13.85	-4.55	-37.65	-56.05	-	-	-40	29.54	-21.96	34.10	100	H	73	-18.40

Remarks

1. Peak(dBuV/m) = Peak Reading Value(dBuV/m) + Correction Factor(dB) + Distance Factor(dB)
2. Peak(dBuA/m) = Peak(dBuV/m) - 51.5 dB(Conversion Factor)
3. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
4. Margin(dB) = (Peak) Result (dBµA/m) – (Peak) Limit (dBµA/m)



3.5.5.2 Radiated Emissions (Below 1 GHz)

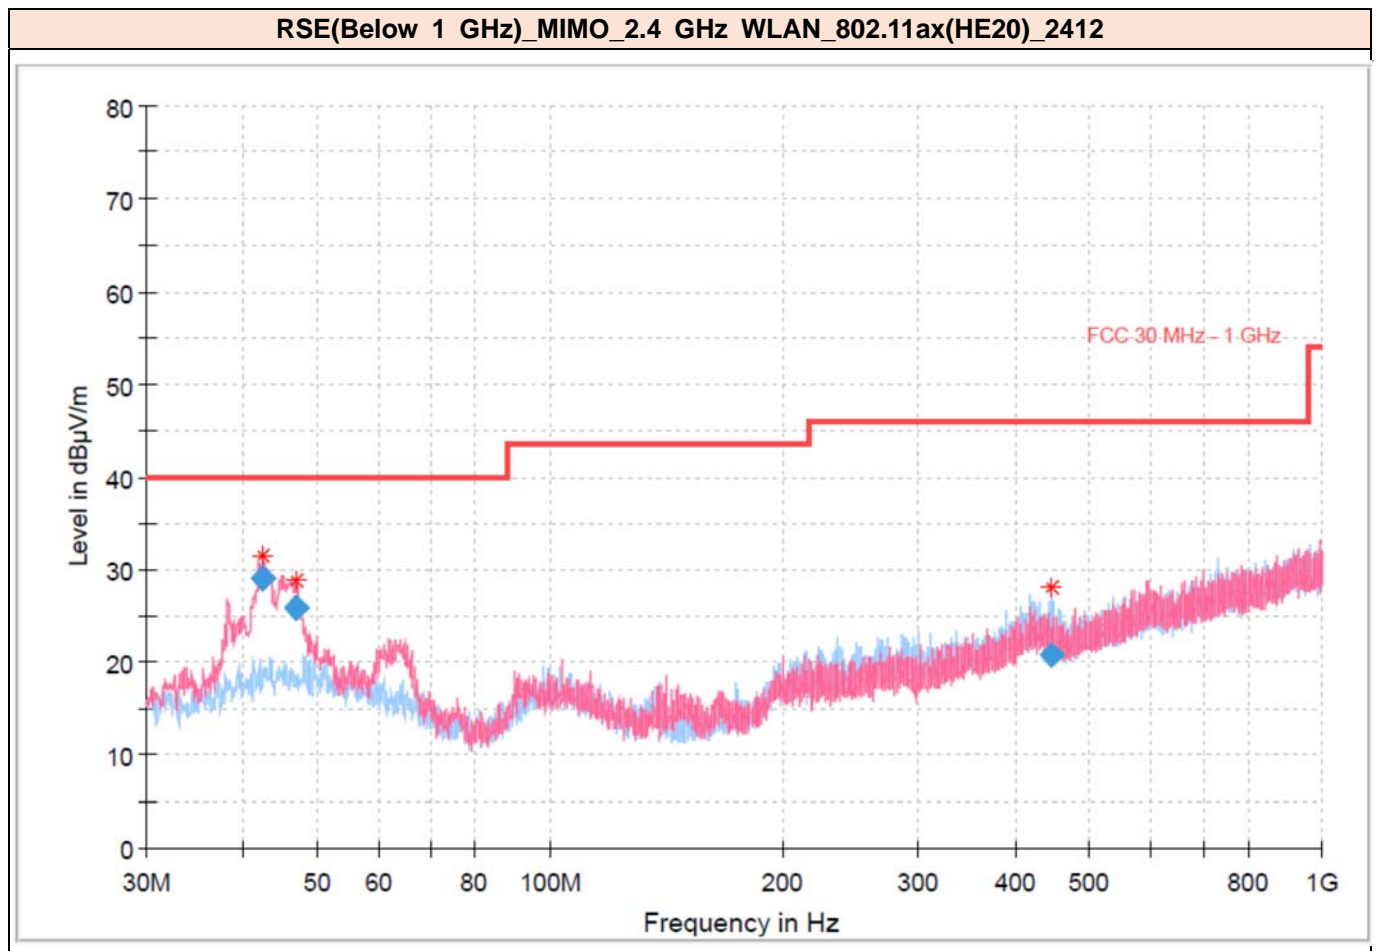


Frequency [MHz]	Peak Reading Value [dBµV/m]	Peak [dBµV/m]	Quasi Reading Value [dBµV/m]	Quasi Peak [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Pol	Azimuth [deg]	Correction Factor [dB]
42.448	49.32	29.02	-	-	40.00	10.98	100	V	358	-20.30
46.867	45.92	26.02	-	-	40.00	13.98	100	V	130	-19.90
446.561	36.70	20.90	-	-	46.00	25.10	100	H	276	-15.80

Remarks

1. Peak(dBuV/m) = Peak Reading Value(dBuV/m) + Correction Factor(dB)
2. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin(dB) = (Peak) Result (dBµV/m) – (Peak) Limit (dBµV/m)



RSE(Below 1 GHz)_SISO_ANT2_2.4 GHz WLAN_802.11ax(HE20)_2412

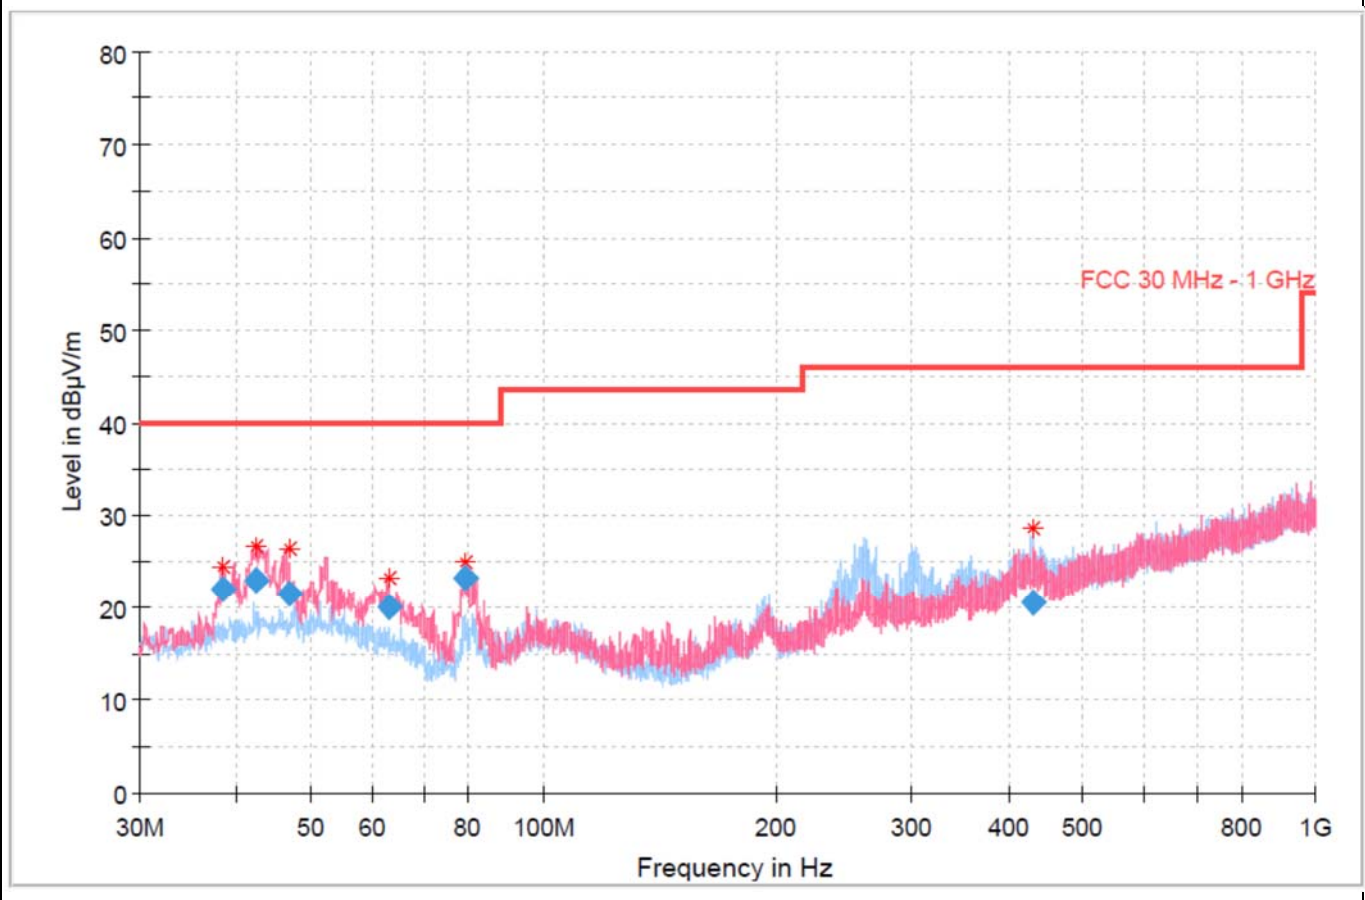


Frequency [MHz]	Peak Reading Value [dBµV/m]	Peak [dBµV/m]	Quasi Reading Value [dBµV/m]	Quasi Peak [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Pol	Azimuth [deg]	Correction Factor [dB]
38.551	43.12	21.92	-	-	40.00	18.08	100	V	76	-21.20
42.570	43.38	23.08	-	-	40.00	16.92	100	V	242	-20.30
46.902	41.31	21.41	-	-	40.00	18.59	100	V	113	-19.90
63.102	42.29	19.99	-	-	40.00	20.01	100	V	269	-22.30
78.987	50.33	23.23	-	-	40.00	16.77	100	V	257	-27.10
430.182	36.51	20.61	-	-	46.00	25.39	100	H	225	-15.90

Remarks

1. Peak(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin(dB) = (Peak) Result (dBµV/m) – (Peak) Limit (dBµV/m)

3.5.5.3 Radiated Emissions (Above 1 GHz)

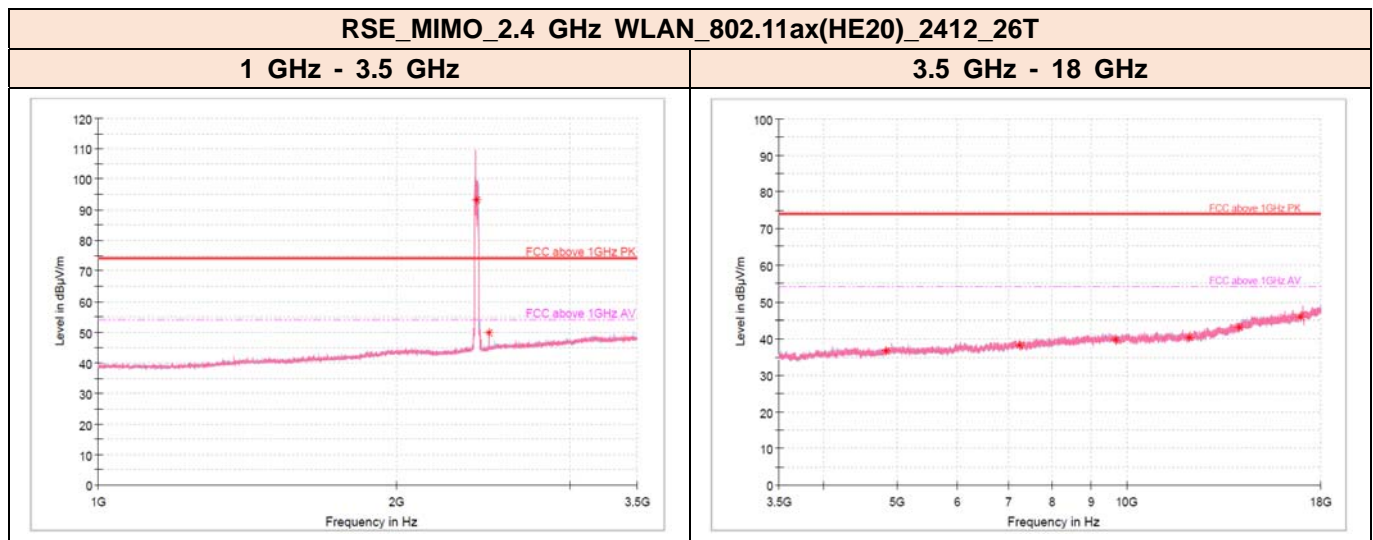

Frequency [MHz]	Peak Reading Value [dBµV/m]	Peak Result [dBµV/m]	AVG Reading Value [dBµV/m]	AVG Result [dBµV/m]	DCCF [dB]	Bandwidth [kHz]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
4824.00	59.24	36.64	-	-		1000	300.0	V	37	-22.60	37.36	74.00	-	-
7236.15	57.50	38.30	-	-		1000	400.0	V	0	-19.20	35.70	74.00	-	-
9648.30	55.95	39.85	-	-		1000	300.0	V	177	-16.10	34.15	74.00	-	-
12064.97	54.21	40.31	-	-		1000	200.0	V	37	-13.90	33.69	74.00	-	-
14472.13	55.42	43.22	-	-		1000	300.0	H	257	-12.20	30.78	74.00	-	-
16884.27	54.33	45.93	-	-		1000	100.0	H	1	-8.40	28.07	74.00	-	-

Remarks



1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Distance Factor(dB) = 20 x Log(3/4.5) [Reference Distance: 3 m, Measurement Distance: 4.5 m]
6. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



RSE_MIMO_2.4 GHz WLAN_802.11ax(HE20)_2412_SU

1 GHz - 3.5 GHz

3.5 GHz - 18 GHz

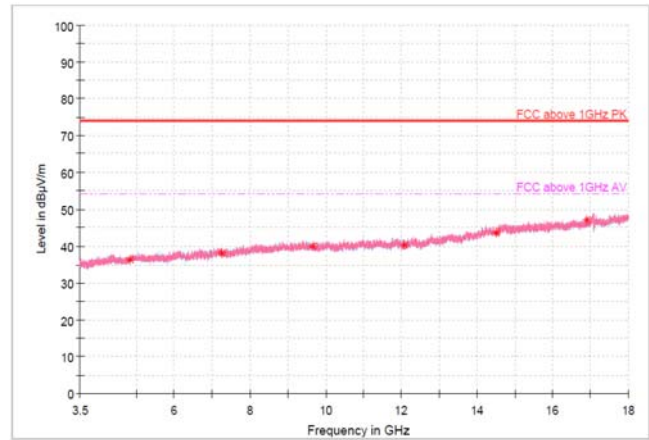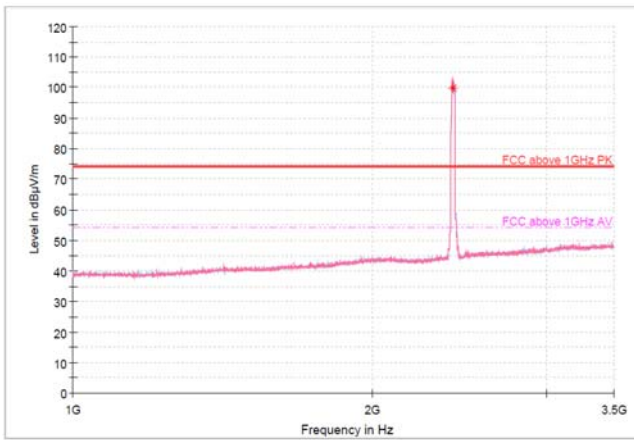

Frequency [MHz]	Peak Reading Value [dBuV/m]	Peak Result [dBuV/m]	AVG Reading Value [dBuV/m]	AVG Result [dBuV/m]	DCCF [dB]	Bandwidth [kHz]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
4824.00	59.11	36.51	-	-		1 000	100.0	H	281	-22.60	37.49	74.00	-	-
7236.63	57.56	38.36	-	-		1 000	100.0	V	333	-19.20	35.64	74.00	-	-
9648.30	56.05	39.95	-	-		1 000	300.0	V	0	-16.10	34.05	74.00	-	-
12060.45	54.27	40.37	-	-		1 000	200.0	V	140	-13.90	33.63	74.00	-	-
14472.12	55.78	43.68	-	-		1 000	400.0	V	219	-12.10	30.32	74.00	-	-
16884.27	55.58	47.18	-	-		1 000	300.0	V	0	-8.40	26.82	74.00	-	-

Remarks



1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Distance Factor(dB) = 20 x Log(3/4.5) [Reference Distance: 3 m, Measurement Distance: 4.5 m]
6. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)



RSE_MIMO_2.4 GHz WLAN_802.11ax(HE20)_2437_26T

1 GHz - 3.5 GHz

3.5 GHz - 18 GHz

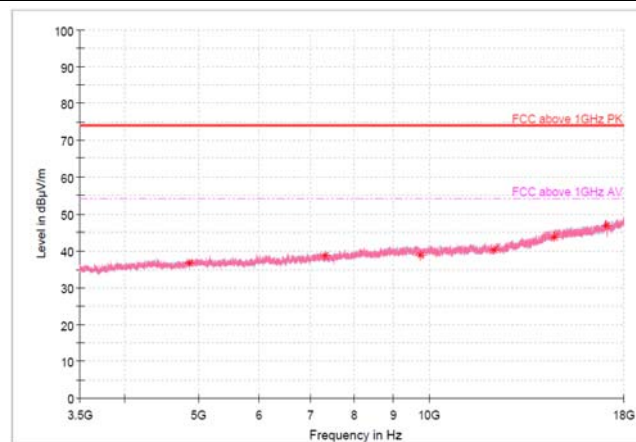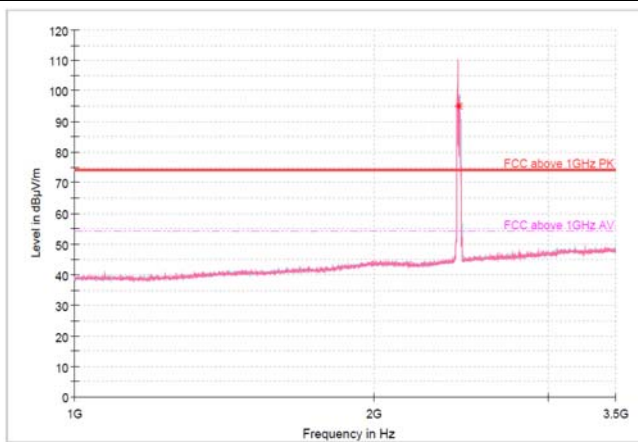

Frequency [MHz]	Peak Reading Value [dBµV/m]	Peak Result [dBµV/m]	AVG Reading Value [dBµV/m]	AVG Result [dBµV/m]	DCCF [dB]	Bandwidth [kHz]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
4874.12	59.09	36.69	-	-	-	1 000	400.0	V	50	-22.40	37.31	74.00	-	-
7311.08	58.02	38.72	-	-	-	1 000	200.0	H	324	-19.30	35.28	74.00	-	-
9748.05	54.98	38.98	-	-	-	1 000	100.0	H	192	-16.00	35.02	74.00	-	-
12185.02	54.42	40.42	-	-	-	1 000	100.0	V	274	-14.00	33.58	74.00	-	-
14622.47	55.37	43.87	-	-	-	1 000	300.0	V	0	-11.50	30.13	74.00	-	-
17058.95	55.24	46.94	-	-	-	1 000	200.0	H	229	-8.30	27.06	74.00	-	-

Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Distance Factor(dB) = 20 x Log(3/4.5) [Reference Distance: 3 m, Measurement Distance: 4.5 m]
6. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)