

## RF Exposure Test Report

**Report No.:** SA200619C19

**FCC ID:** A3LSMT975

**Test Model:** SM-T975

**Received Date:** May 19, 2020

**Test Date:** Jun. 16, 2020

**Issued Date:** Jun. 17, 2020

**Applicant:** Samsung Electronics Co Ltd

**Address:** 19 Chapin Rd, Building D. Pine Brook, New Jersey, 07058 United States

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**FCC Registration /  
Designation Number:** 198487 / TW2021



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. This report should not be used by the client to claim and endorsement by TAF.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 General Information</b> .....	<b>5</b>
2.1 General Description of EUT .....	5
2.2 Description of Test Modes .....	6
<b>3 RF Exposure</b> .....	<b>7</b>
3.1 Description of Support Units .....	7
3.1.1 Configuration of System under Test .....	7
3.2 Test Setup .....	8
3.3 Test Instruments .....	9
3.4 Limits for Maximum Permissible Exposure (MPE).....	10
3.5 Test Point Description .....	11
<b>4 Calculation Result of Maximum Conducted Power</b> .....	<b>12</b>
<b>5 Photographs of the Test Configuration</b> .....	<b>16</b>

### Release Control Record

Issue No.	Description	Date Issued
SA200619C19	Original release.	Jun. 17, 2020

## 1 Certificate of Conformity

**Product:** Tablet

**Brand:** Samsung

**Test Model:** SM-T975

**Sample Status:** Engineering sample

**Applicant:** Samsung Electronics Co Ltd

**Test Date:** Jun. 16, 2020

**Standards:** FCC Part 2 (Section 2.1091)  
FCC Part 1 (Section 1.1307(c) and (d), Section 1.1310)

**References Test Guidance:** KDB 680106 D01 RF Exposure Wireless Charging v03

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :**

*Annie Chang*

**Date:**

Jun. 17, 2020

Annie Chang / Senior Specialist

**Approved by :**

*Rex Lai*

**Date:**

Jun. 17, 2020

Rex Lai / Associate Technical Manager

## 2 General Information

### 2.1 General Description of EUT

Product	Tablet
Brand	Samsung
Test Model	SM-T975
Sample Status	Engineering sample
Power Supply Rating	I/P rating: 5Vdc or 9Vdc O/P rating: 0.05W
Modulation Type	FSK
Operating Frequency	530 kHz
Antenna Type	Coil antenna
Accessory Device	Refer to note as below
Data Cable Supplied	Refer to note as below
Maximum Power Output from the Charging Coil	0.05W

Note:

1. The EUT is a Tablet which could charge to Stylus Pen (S-pen) via Qi function as the following.

Product	Model	FCC ID
Stylus Pen (S-pen)	EJ-PT870	A3LEJPT870

2. The EUT use following accessory devices.

Accessories	Brand	Model	Manufacturer	Specification
Earphone	Samsung	EHS64	Samsung	3.5mm
S-pen	Samsung	EJ-PT870	Samsung	Bluetooth
Keyboard	Samsung	EF-DT970	Samsung	N/A
Cable	Samsung	EP-DG930M	Samsung	A to C type, shielded, 1.0m
Adapter	Samsung	EP-TA200	Samsung	AC I/P: 100-240V, 50-60Hz 0.5A DC O/P: 9.0V / 1.67A or 5.0V/2.0A
Battery	Samsung	EB-BT975ABY	Samsung	Rating: 3.86Vdc, 9800mAh, 37.83Wh

## 2.2 Description of Test Modes

The EUT has been pre-tested under following test modes, and test mode 1 was the worst case for final test:

### Condition: AC Adaptor

Test Condition	Test Mode	Description
S-Pen charging mode	1	Tablet condition: Charging with AC adaptor, charging from EUT to S-Pen
	2	Tablet condition: Portable without AC adaptor, charging from EUT to S-Pen

### Condition: All RF communications

Test Condition	Test Mode	Description
Connections	1	GSM 850 + Bluetooth (2.4GHz) + WLAN (5 GHz) + GNSS
	2	GSM 1900+ Bluetooth (2.4 GHz) + WLAN (5 GHz) + GNSS
	3	WCDMA Band 2 + Bluetooth (2.4 GHz) + WLAN (5 GHz) + GNSS
	4	WCDMA Band 4 + Bluetooth (2.4 GHz) + WLAN (5 GHz) + GNSS
	5	WCDMA Band 5 + Bluetooth (2.4 GHz) + WLAN (5 GHz) + GNSS
	6	LTE Band 2 + Bluetooth (2.4 GHz) + WLAN (5 GHz) + GNSS
	7	LTE Band 4 + Bluetooth (2.4 GHz) + WLAN (5 GHz) + GNSS
	8	LTE Band 5 + Bluetooth (2.4 GHz) + WLAN (5 GHz) + GNSS
	9	LTE Band 12 + Bluetooth (2.4 GHz) + WLAN (5 GHz) + GNSS
	10	LTE Band 13 + Bluetooth (2.4 GHz) + WLAN (5 GHz) + GNSS
	11	LTE Band 25 + Bluetooth (2.4 GHz) + WLAN (5 GHz) + GNSS
	12	LTE Band 26 + Bluetooth (2.4 GHz) + WLAN (5 GHz) + GNSS
	13	LTE Band 41 + Bluetooth (2.4 GHz) + WLAN (5 GHz) + GNSS
	14	LTE Band 66 + Bluetooth (2.4 GHz) + WLAN (5 GHz) + GNSS

Test modes are presented in the report as below.

Test Mode	Description	
	S-Pen charging mode	Connections
1	Tablet condition: Charging with AC adaptor, charging from EUT to S-Pen	GSM 850 + Bluetooth (2.4 GHz) + WLAN (5 GHz) + GNSS

#### Remark

1. The H-field test was conducted while all other wireless technologies/RF communications operating at their under perspective maximum RF output.
2. RF Exposure measurement is considered as highest power of each band/channel/RB condition/offset/mode etc.
3. RF exposure measurement should be adjusted from worst angle.

### 3 RF Exposure


#### 3.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/ No)	Cores (Qty.)	Remarks
1.	USB cable	1	0.93	Y	0	Supplied by client

Note: The core(s) is(are) originally attached to the cable(s).


#### 3.1.1 Configuration of System under Test

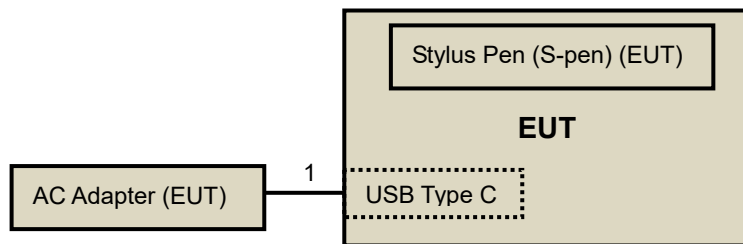

### 3.2 Test Setup

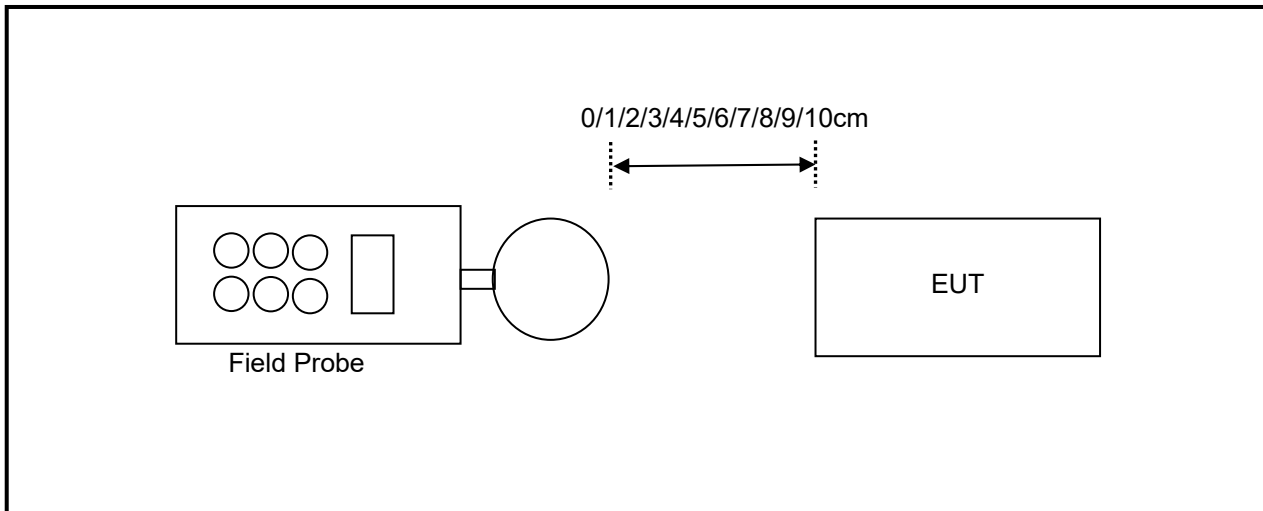

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10cm measured from the edge of the probe(s) to the edge of the device.

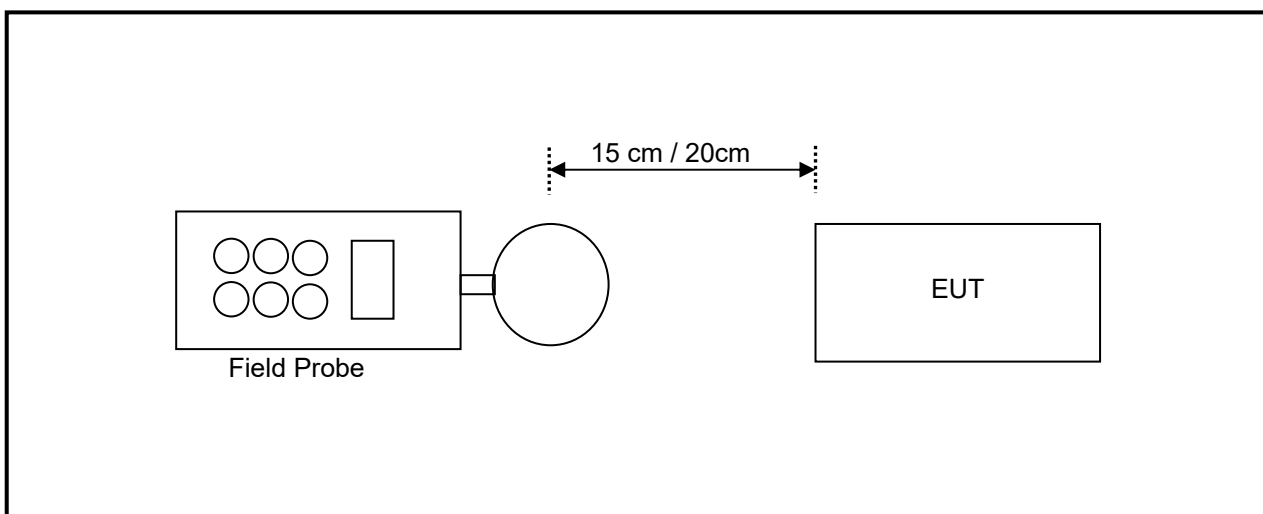

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm or 20 cm measured from the center of the probe(s) to the edge of the device.



### 3.3 Test Instruments

Description	Brand	Model No.	Frequency Range	Calibrated Date	Calibrated Until
Broadband Field Meter	NARDA	NBM-550	-	Mar. 25, 2020	Mar. 24, 2022
Magnetic Field Meter	NARDA	ELT-400	1Hz – 400kHz	Apr. 17, 2020	Apr. 16, 2022
Magnetic Probe	NARDA	HF-3061	300kHz – 30MHz	Apr. 16, 2020	Apr. 15, 2022
Magnetic Probe	NARDA	HF-0191	27 – 1000MHz	Apr. 21, 2020	Apr. 20, 2022
Electric Field Meter	COMBINOVA	EFM 200	5Hz – 400kHz	Dec. 6, 2019	Dec. 5, 2021
E-Field Probe	NARDA	EF-0391	100kHz – 3GHz	Mar. 25, 2020	Mar. 24, 2022
E-Field Probe	NARDA	EF-6091	100MHz – 60GHz	Mar. 25, 2020	Mar. 24, 2022
Wideband Radio Communication Tester	R&S	CMW500	-	Feb. 14, 2020	Feb. 13, 2021
Wireless Connection Tester	R&S	CMW270	-	Mar. 19, 2020	Mar. 18, 2021
Radio Communication Analyzer Anritsu	R&S	CBT	-	Aug. 09, 2018	Aug. 08, 2020

- NOTE:**
1. The calibration interval of the above test instruments is 12/24 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in Chia Pau RF Chamber
  3. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 3.4 Limits for Maximum Permissible Exposure (MPE)

§ 1.1310 The criteria listed in table 1 shall be used to evaluate the environmental impact of human exposure to radiofrequency(RF) radiation as specified in § 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of § 2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

This document is prepared to show compliance with the RF Exposure requirements as required in 1.1310 of the FCC Rules and Regulations.

The limit for Maximum Permissible Exposure (MPE), specified in FCC §1.1310, is listed in Table 1-1.

According to FCC §1.1310: the criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b).

For Measurement Distance: 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10cm


Note: The aggregate H-field strengths as close as possible surrounding the device and above the top surface from all simultaneous transmitting coils.

For Measurement Distance: 15, 20cm

#### 680106 D01 RF Exposure Wireless Charging App v03

The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

### 3.5 Test Point Description

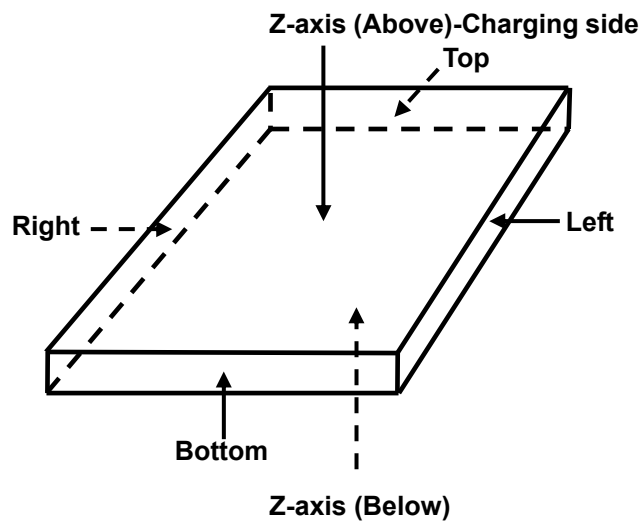

#### Operational correction factor

The EUT charges of 15 minutes at maximum illumination to full charge. It recharges at maximum illumination when 10% or more of the battery level drop is detected.

Operational correction factor =  $15 \text{ min} / 30 \text{ min} = 0.5$

#### 4 Calculation Result of Maximum Conducted Power

##### Charging with Adapter

For Measurement Distance: 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10cm

H-Field Measurement (Closest distance @ 10 cm)

EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0535	0.0535	0.0555	0.0640	0.0850	0.0533
Max H-field (A/m)	0.0428	0.0428	0.0444	0.0512	0.0680	0.0426
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5872	-1.5872	-1.5856	-1.5788	-1.5620	-1.5874
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7722	-0.7722	-0.7706	-0.7638	-0.7470	-0.7724

H-Field Measurement (Closest distance @ 9 cm)

EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0545	0.0575	0.0565	0.0640	0.1010	0.0572
Max H-field (A/m)	0.0436	0.0460	0.0452	0.0512	0.0808	0.0458
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5864	-1.5840	-1.5848	-1.5788	-1.5492	-1.5842
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7714	-0.7690	-0.7698	-0.7638	-0.7342	-0.7692

H-Field Measurement (Closest distance @ 8 cm)

EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0555	0.0605	0.0595	0.0640	0.1070	0.0602
Max H-field (A/m)	0.0444	0.0484	0.0476	0.0512	0.0856	0.0482
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5856	-1.5816	-1.5824	-1.5788	-1.5444	-1.5818
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7706	-0.7666	-0.7674	-0.7638	-0.7294	-0.7668

H-Field Measurement (Closest distance @ 7 cm)

EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0575	0.0715	0.0610	0.0645	0.1195	0.0703
Max H-field (A/m)	0.0460	0.0572	0.0488	0.0516	0.0956	0.0562
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5840	-1.5728	-1.5812	-1.5784	-1.5344	-1.5738
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7690	-0.7578	-0.7662	-0.7634	-0.7194	-0.7588

H-Field Measurement (Closest distance @ 6 cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0595	0.0785	0.0675	0.0645	0.1255	0.0779
Max H-field (A/m)	0.0476	0.0628	0.0540	0.0516	0.1004	0.0623
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5824	-1.5672	-1.5760	-1.5784	-1.5296	-1.5677
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7674	-0.7522	-0.7610	-0.7634	-0.7146	-0.7527

H-Field Measurement (Closest distance @ 5 cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0610	0.1095	0.0705	0.0660	0.1375	0.1072
Max H-field (A/m)	0.0488	0.0876	0.0564	0.0528	0.1100	0.0858
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5812	-1.5424	-1.5736	-1.5772	-1.5200	-1.5442
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7662	-0.7274	-0.7586	-0.7622	-0.7050	-0.7292

H-Field Measurement (Closest distance @ 4 cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0620	0.1125	0.0720	0.0660	0.1685	0.1108
Max H-field (A/m)	0.0496	0.0900	0.0576	0.0528	0.1348	0.0886
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5804	-1.5400	-1.5724	-1.5772	-1.4952	-1.5414
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7654	-0.7250	-0.7574	-0.7622	-0.6802	-0.7264

H-Field Measurement (Closest distance @ 3 cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0640	0.1140	0.0745	0.0670	0.1760	0.1132
Max H-field (A/m)	0.0512	0.0912	0.0596	0.0536	0.1408	0.0906
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5788	-1.5388	-1.5704	-1.5764	-1.4892	-1.5394
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7638	-0.7238	-0.7554	-0.7614	-0.6742	-0.7244

H-Field Measurement (Closest distance @ 2 cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0675	0.1175	0.0780	0.0675	0.2025	0.1171
Max H-field (A/m)	0.0540	0.0940	0.0624	0.0540	0.1620	0.0937
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5760	-1.5360	-1.5676	-1.5760	-1.4680	-1.5363
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7610	-0.7210	-0.7526	-0.7610	-0.6530	-0.7213

H-Field Measurement (Closest distance @ 1 cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.1085	0.1510	0.1235	0.0690	0.2755	0.1509
Max H-field (A/m)	0.0868	0.1208	0.0988	0.0552	0.2204	0.1207
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5432	-1.5092	-1.5312	-1.5748	-1.4096	-1.5093
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7282	-0.6942	-0.7162	-0.7598	-0.5946	-0.6943

H-Field Measurement (Closest distance @ 0 cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.1390	0.1695	0.1690	0.0700	0.3565	0.1688
Max H-field (A/m)	0.1112	0.1356	0.1352	0.0560	0.2852	0.1350
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.5188	-1.4944	-1.4948	-1.5740	-1.3448	-1.4950
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7038	-0.6794	-0.6798	-0.7590	-0.5298	-0.6800

Measurements were made from all sides and the top of the primary/client pair, with the 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10cm measured from the edge of the probe(s) to the edge of the device. The highest emission level was recorded.

### Charging with Adapter

For Measurement Distance: 15, 20cm

E-Field Measurement							
Distance	15cm				15cm	20cm	15cm
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Above)	Z-axis (Below)
Max E-field (V/m)	5.5400	5.6100	8.4200	5.4200	9.2400	8.8400	8.4600
Limit (V/m)	614	614	614	614	614	614	614
Margin (V/m)	-608.4600	-608.3900	-605.5800	-608.5800	-604.7600	-605.1600	-605.5400
50 % Limit (V/m)	307	307	307	307	307	307	307
50 % Margin (V/m)	-301.4600	-301.3900	-298.5800	-301.5800	-297.7600	-298.1600	-298.5400

H-Field Measurement							
Distance	15cm				15cm	20cm	15cm
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Above)	Z-axis (Below)
Max H-field (uT)	0.0340	0.0360	0.0410	0.0293	0.0510	0.0424	0.0442
Max H-field (A/m)	0.0272	0.0288	0.0328	0.0234	0.0408	0.0339	0.0354
Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63	1.63
Margin (A/m)	-1.6028	-1.6012	-1.5972	-1.6066	-1.5892	-1.5961	-1.5946
50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815	0.815
50 % Margin (A/m)	-0.7878	-0.7862	-0.7822	-0.7916	-0.7742	-0.7811	-0.7796

Measurements were made from all sides and the top of the primary/client pair, with the 15 cm or 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

## 5 Photographs of the Test Configuration

Please refer to the attached file (Test Setup Photo).

--- END ---