

TEST REPORT

FCC RULES Part 15 Subpart C

Equipment Under Test	:	WLAN Phone
Model No.	:	SMT-W6100
Serial No.	:	N/A
Applicant	:	Samsung Electronics Co., Ltd.
Manufacturer	:	Samsung Electronics Co., Ltd.
Date of Test(s)	:	Feb. 01, 2006 ~ Feb. 21, 2006
Date of Issue	:	Mar. 16, 2006

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Testing Korea Co., Ltd. or testing done by SGS Testing Korea Co., Ltd. in connection with distribution or use of the product described in this report must be approved by SGS Testing Korea Co., Ltd. in writing.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

VERIFICATION OF COMPLIANCE

Applicant : Samsung Electronic Co., Ltd.
Kind of Product : WLAN Phone
Brand Name : -
Model Name : SMT-W6100
Model Difference : -
Report File No. : STROR-06-029
Date of test : Feb. 01, 2006 ~ Feb. 21, 2006
Receiver EUT : -

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
Part 15 Subpart B ,Subpart C §15.247	Complied

The above equipment was tested by SGS Testing Korea Co., Ltd. for compliance with the requirements set forth in the FCC RULES Part Subpart §15.247. The results of testing in this report apply to the product system that was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:



Date

Mar.16, 2006

Feel Jeong

Approved By



Date

Mar.16, 2006

Albert Lim

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

INDEX

CONTENTS	Page
1. GENERAL INFORMATION -----	4
2. CONDUCTED POWERLINE TEST -----	6
3. SPURIOUS EMISSION, BAND EDGE, AND RESTRICTED BAND TEST -----	15
4. 6 dB BANDWIDTH MEASUREMENT -----	30
5. MAXIMUM PEAK OUTPUT POWER MEASUREMENT -----	36
6. POWER SPECTRAL DENSITY MEASUREMENT -----	38
7. ANTENNA REQUIREMENT -----	44
8. Attachment A – Photos of the Test Set up -----	45
9. Attachment B – Photos of the EUT-----	47

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1. GENERAL INFORMATION

1.1 General Description of EUT & Power

Product Name	WLAN Phone
Model Number	SMT-W6100
Frequency Range	2412 MHz ~ 2462 MHz(802.11b, 802.11g)
Channel Number	11 Channel(802.11b, 802.11g)
Air Data Rate	54 Mbps(802.11g Mode) 11 Mbps(802.11b Mode)
Type of Modulation	802.11b : DSSS(CCK, DQPSK, DBPSK) 802.11g : OFDM(64QAM,16QAM,QPSK,BPSK)
Frequency Selection	By software controlled via a notebook PC.
EUT Description	2.4 GHz (Direct Sequence Spread Spectrum and Orthogonal Frequency Division Multiplex) Data Transceiver for WLAN application
Antenna Type	Internal
Antenna Gain	0.68 dBi (2.4 GHz)
Input Power(System)	DC 3.8 V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

1.2 Summary of Test Results


The EUT has been tested according to the following specifications:

APPLIED STANDARD:FCC 47 C.F.R. Part 15, Subpart B and Subpart C		
Standard Section	Test Item	Result
15.107 15.207	AC Power Conducted Emission	PASS
15.247(a)(2)	6 dB Bandwidth	PASS
15.247(b)	Maximum Peak Output Power	PASS
15.205(a) 15.209(a) 15.247(d)	Spurious Emission, Band Edge, and Restricted Bands	PASS
15.247(d)	Power Spectral Density	PASS
15.247(i) 1.1307(b)(1)	RF Exposure	PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2. CONDUCTED POWERLINE TEST

2.1 Test Setup

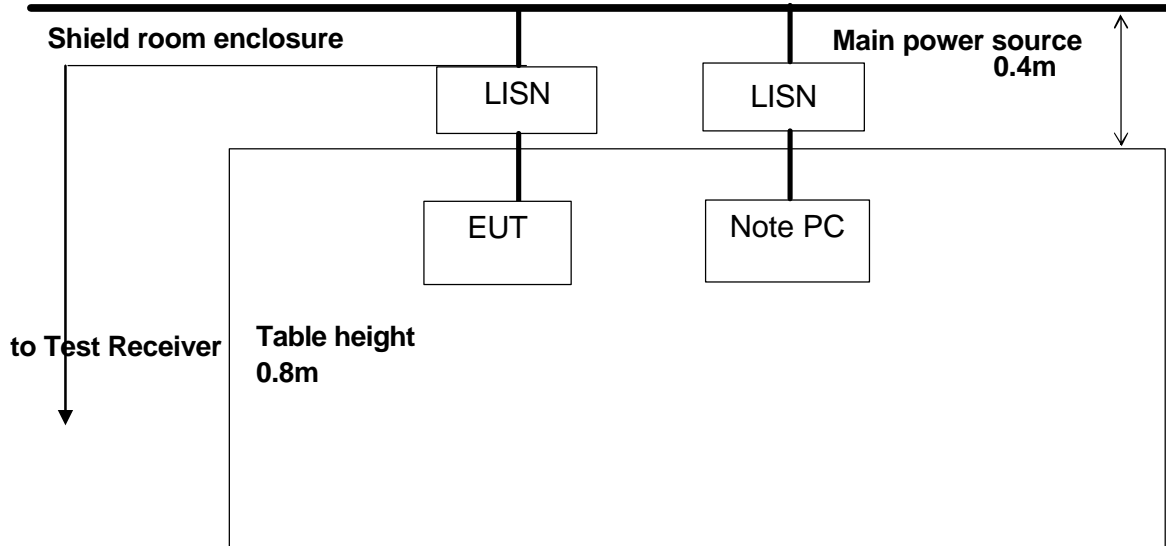

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.2 Limit

According to §15.107(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.50	66-56*	56-46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

* Decreases with the logarithm of the frequency.

2.3 Test Procedure

The test procedure is performed in a 12 ft×12 ft×8 ft(L×W×H) shielded room. The EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2.4 Test Result

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line.

Humidity Level	53 %	Temperature	24?
----------------	------	-------------	-----

Frequency range : 0.15 MHz – 30 MHz

Measured Bandwidth : 9 kHz

Test mode :802.11b(11 Mbps)

FREQ. (MHz)	LEVEL(dB μ V)		LINE	LIMIT(dB μ V)		MARGIN(dB)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.165	55.1	33.7	H	65.2	55.2	10.11	21.51
0.185	55.4	43.8	H	64.3	54.3	8.86	10.46
0.400	50.9	42.6	H	57.9	47.9	6.95	5.25
0.165	55.0	33.6	N	65.2	55.2	10.21	21.61
0.190	52.6	36.8	N	64.0	54.0	11.44	17.24
0.405	52.8	44.7	N	57.8	47.8	4.95	3.05

REMARKS :

- Note : • Line (H) :Hot , • Line (N) :Neutral

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Test mode :802.11g(54 Mbps)


FREQ. (MHz)	LEVEL(dB μ V)		LINE	LIMIT(dB μ V)		MARGIN(dB)	
	Q-Peak	Average		Q-Peak	Average	Q-Peak	Average
0.165	54.7	41.8	H	65.2	55.2	10.51	13.41
0.400	52.0	42.0	H	57.9	47.9	5.85	5.85
9.110	41.4	28.2	H	60.0	50.0	18.60	21.80
0.175	54.1	43.8	N	64.7	54.7	10.62	10.92
0.225	50.6	32.1	N	62.6	52.6	12.03	20.53
0.400	49.6	40.6	N	57.9	47.9	8.25	7.25

REMARKS :

- Note : • Line (H) :Hot , • Line (N) : Neutral


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Plot of Conducted Powerline
 Test mode:802.11b(Hot)

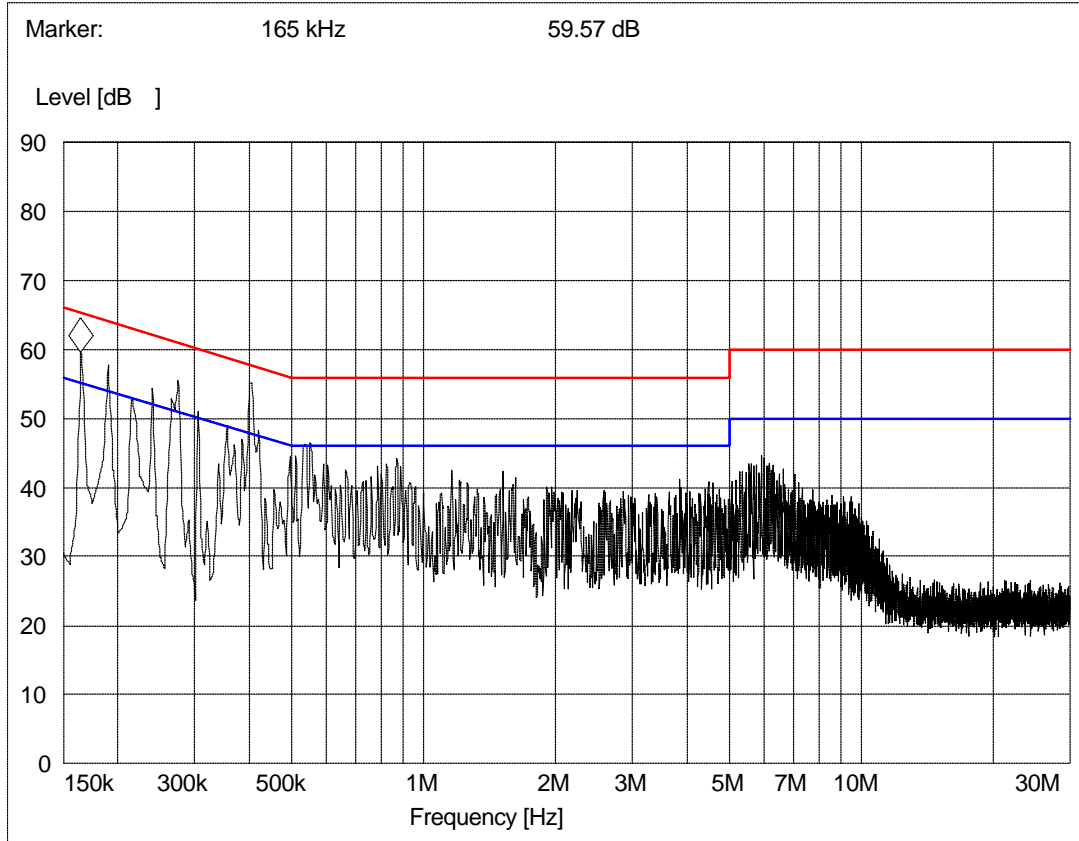


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Test mode:802.11b(Neutral)

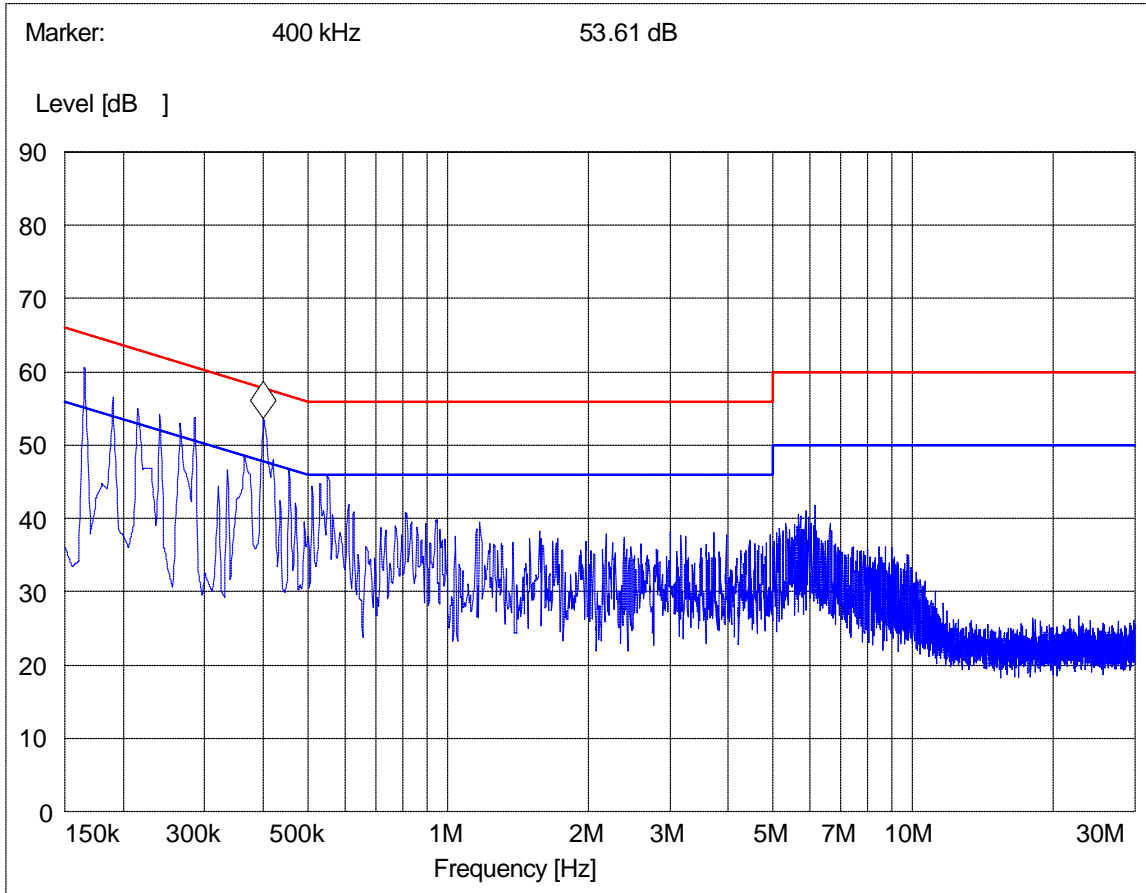


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Test mode:802.11g(Hot)

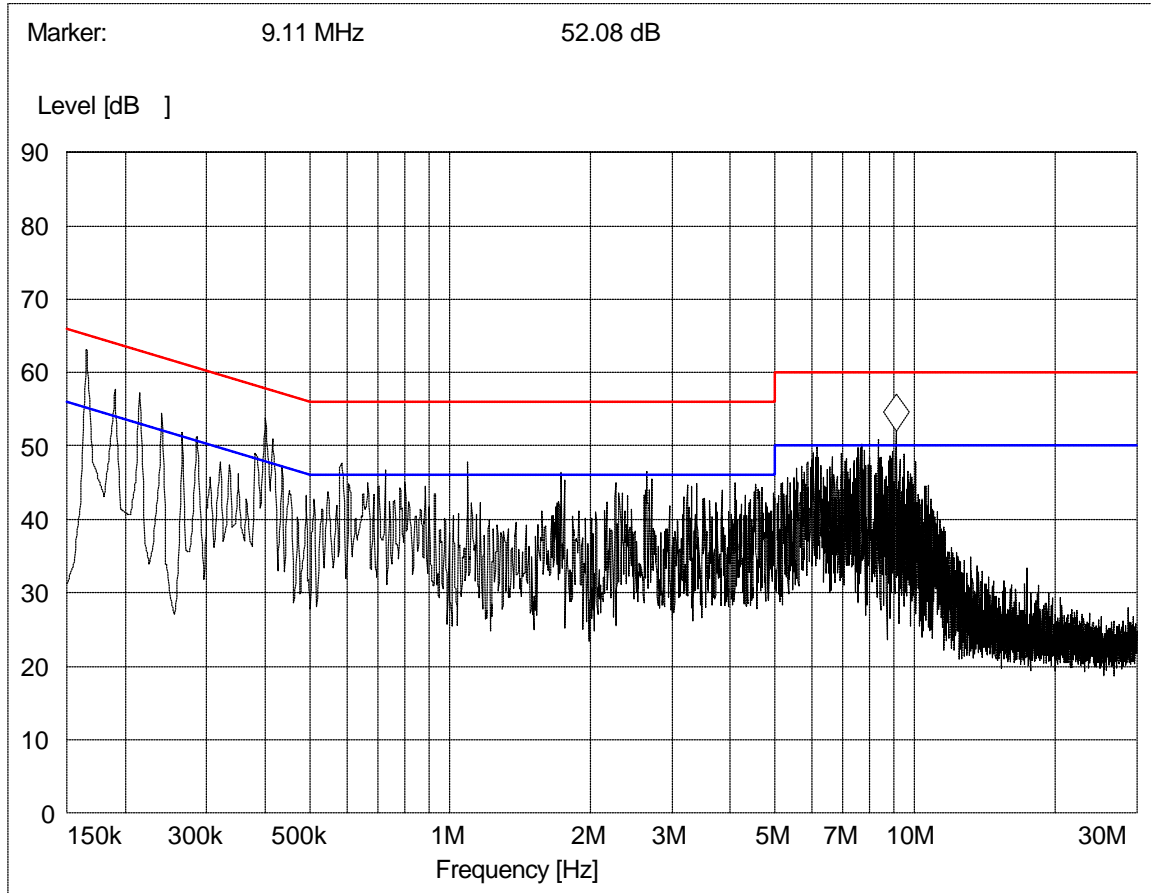

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Test mode:802.11 g(Neutral)

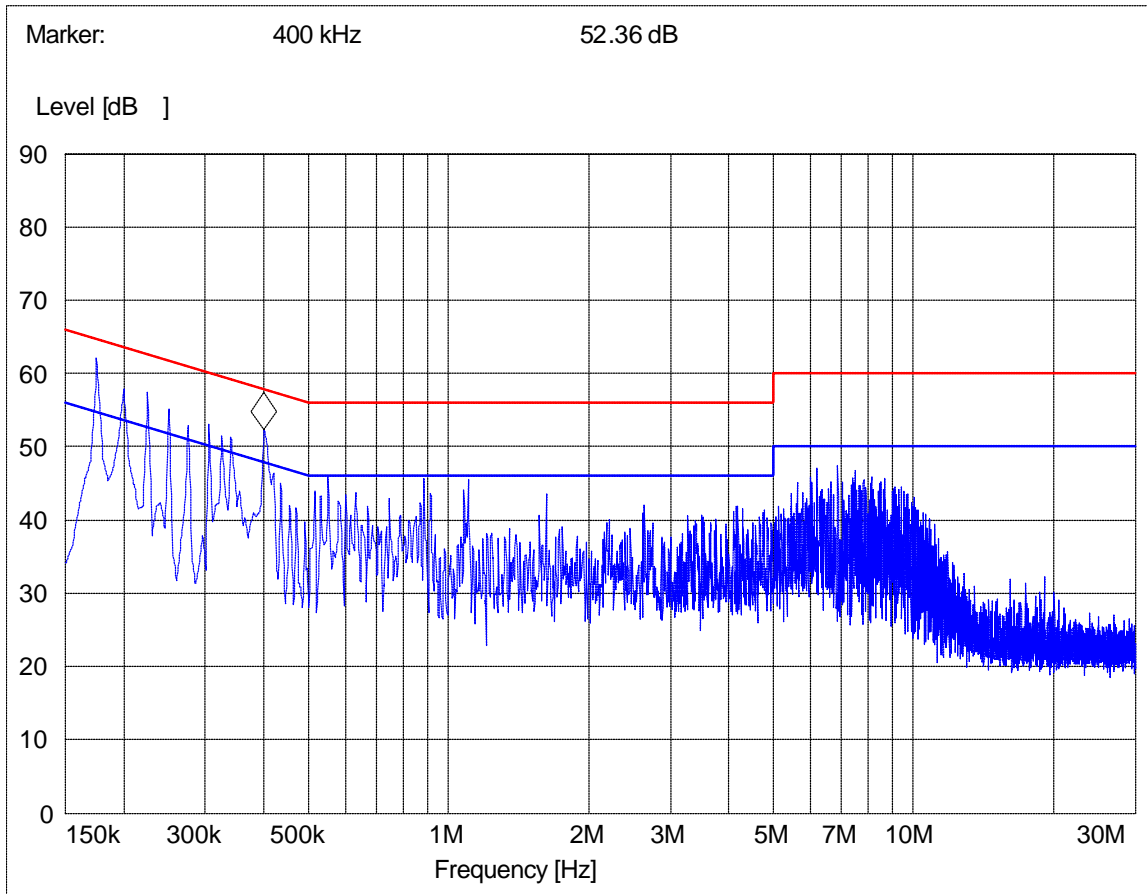

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Test Equipment Used

EQUIPMENT	MANUFACTURER	MODEL	CAL DUE.
Two-Line V-Network	Rohde & Schwarz	ENV216	Dec.2006
Two-Line V-Network	NNB 41	Schaffner	Sep. 2006
Shielded Room	N/A	-	-
Test Receiver	Rohde & Schwarz	ESHS 10	Sep. 2006


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3. SPURIOUS EMISSION, BAND EDGE, AND, RESTRICTED BANDS TEST


3.1 Test Setup

1) Spurious Radiated Emissions

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 20 GHz.

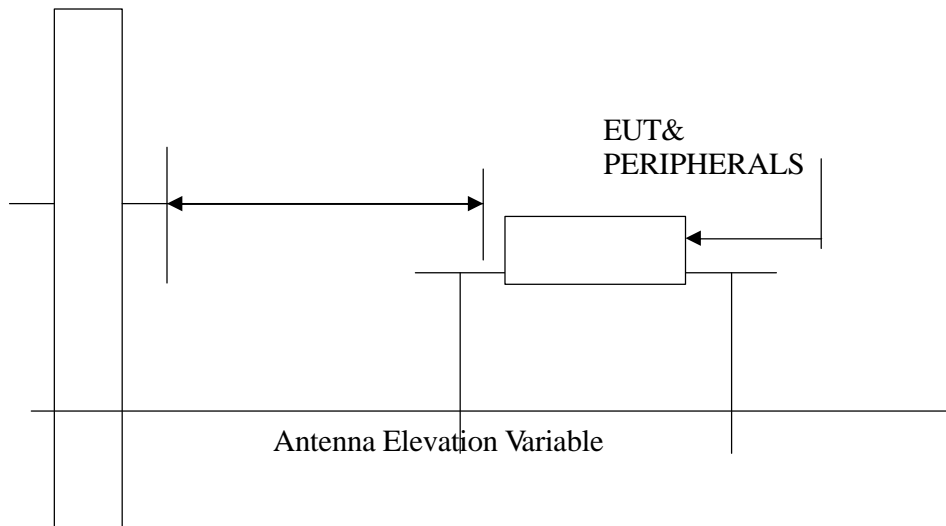

2) Spurious RF Conducted Emissions

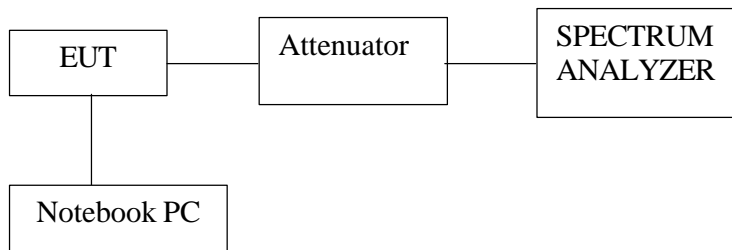

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3.2 Limit

According to §5.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §5.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §5.205(a), must also comply the radiated emission limits specified in section §5.209(a) (see section §5.205(c))

According to §15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

According to §5.109(a), for an unintentional device, except for Class A digital devices, the field strength of radiated emission from unintentional radiators at a distance of 3 meters shall not exceed the above table.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3.3 Test Procedures

1) Spurious Radiated Emissions

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 1 meter away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz for Peak detection and frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2) Spurious RF Conducted Emissions

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3.4 Test Result

1) Spurious Radiated Emissions

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions are not reported much lower than the prescribed limits. All reading values are quasi-peak values.

Humidity Level	48 %	Temperature	26 ?
----------------	------	-------------	------

Antenna : Dipole Antenna

Radiated Spurious Emission 30 MHz ~1000 MHz Test Data (Worst-Case Configuration)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*162.57	10.1	Q.P.	V	15.43	1.30	26.83	40	13.17
215.05	9.5	Q.P.	V	16.34	1.51	27.35	40	12.65
269.70	7.5	Q.P.	V	16.48	1.72	25.70	47	21.30
*323.85	5.1	Q.P.	V	15.98	1.87	22.95	47	24.05
398.20	6.2	Q.P.	V	16.63	2.06	24.89	47	22.11
541.28	5.5	Q.P.	V	20.63	2.42	28.55	47	18.45

REMARKS :

1. All spurious emission at channels are almost the same below 1 GHz, so that the channel was chosen at representative in final test
2. The RF Chip combined with 802.11b&g mode. It will auto-detect the radio situation then switch the mode. The 802.11g mode is the worse case than the 802.11b mode(11 Mbps). So only the 802.11g mode(54 Mbps) data are recorded in final test report.
3. "*" means the restricted band.
4. Actual = Reading + AF + CL.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

The frequency spectrum above 1000 MHz was investigated. All emissions are not reported much lower than the prescribed limits. Reading values are both peak and average values.

Humidity Level	48 %	Temperature	26 ?
----------------	------	-------------	------

Antenna : Dipole Antenna
Radiated Emission Test Data (Above 1 GHz)

1. 802.11b Low Channel (2412 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF/CL (dB/m)/(dB)	Amp Gain (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2390.00	68.45	Peak	H	28.06/5.56	36.54	65.53	74	8.47
2390.00	51.03	Average	H	28.06/5.56	36.54	48.11	54	5.89
4824.00	58.19	Peak	H	32.13/8.27	36.33	60.38	74	13.62
4824.00	40.61	Average	H	32.13/8.27	36.33	39.15	54	14.85
7236.00	47.66	Peak	H	35.74/11.22	36.43	58.19	74	15.81
7236.00	34.69	Average	H	35.74/11.22	36.43	45.22	54	8.78
N/A								

2. 802.11b Middle Channel (2437 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBuV)	Detect Mode	Pol.	AF/CL (dB/m)/(dB)	Amp Gain (dB)	Actual (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1841.00	63.96	Peak	H	26.36/4.87	36.51	58.68	74	15.32
1841.00	51.48	Average	H	26.36/4.87	36.51	46.20	54	7.80
4874.00	57.03	Peak	H	32.93/8.27	36.33	61.90	74	12.10
4874.00	38.32	Average	H	32.93/8.27	36.33	43.19	54	10.81
7311.00	48.34	Peak	H	35.84/11.63	36.43	59.38	74	14.62
7311.00	32.68	Average	H	35.84/11.63	36.43	43.72	54	10.28
N/A								

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

3. 802.11b High Channel (2462 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBUV)	Detect Mode	Pol.	AF/CL (dB/m)/(dB)	Amp Gain (dB)	Actual (dBUV/m)	Limit (dBUV/m)	Margin (dB)
2483.50	63.71	Peak	H	28.34/5.30	36.54	60.81	74	13.19
2483.50	51.73	Average	H	28.34/5.30	36.54	48.83	54	5.17
4924.00	53.66	Peak	H	32.95/8.32	36.33	58.60	74	15.40
4924.00	38.38	Average	H	32.95/8.32	36.33	43.32	54	10.68
7311.00	46.75	Peak	H	35.94/12.55	36.33	58.91	74	15.09
7311.00	32.52	Average	H	35.94/12.55	36.33	44.68	54	9.32
N/A								

4. 802.11g Low Channel (2412 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBUV)	Detect Mode	Pol.	AF/CL (dB/m)/(dB)	Amp Gain (dB)	Actual (dBUV/m)	Limit (dBUV/m)	Margin (dB)
2390.00	70.14	Peak	H	28.06/5.56	36.54	67.22	74	6.78
2390.00	48.20	Average	H	28.06/5.56	36.54	45.28	54	8.72
4824.00	54.22	Peak	H	32.13/8.27	36.33	58.29	74	15.71
4824.00	35.37	Average	H	32.13/8.27	36.33	39.44	54	14.56
7236.00	49.31	Peak	H	35.74/11.22	36.43	59.84	74	14.16
7236.00	35.08	Average	H	35.74/11.22	36.43	45.61	54	8.39
N/A								

5. 802.11g Middle Channel (2437 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBUV)	Detect Mode	Pol.	AF/CL (dB/m)/(dB)	Amp Gain (dB)	Actual (dBUV/m)	Limit (dBUV/m)	Margin (dB)
1841.00	60.97	Peak	H	26.36/4.87	36.51	55.69	74	18.31
1841.00	47.28	Average	H	26.36/4.87	36.51	42.00	54	12.00
4874.00	53.78	Peak	H	32.93/8.27	36.33	58.65	74	15.35
4874.00	35.20	Average	H	32.93/8.27	36.33	40.07	54	13.93
7311.00	46.10	Peak	H	35.84/11.63	36.43	57.14	74	16.86
7311.00	32.30	Average	H	35.84/11.63	36.43	43.34	54	10.66
N/A								

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6. 802.11g High Channel (2462 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBUV)	Detect Mode	Pol.	AF/CL (dB/m)/(dB)	Amp Gain (dB)	Actual (dBUV/m)	Limit (dBUV/m)	Margin (dB)
2483.50	70.94	Peak	H	28.34/5.30	36.54	68.04	74	5.96
2483.50	49.33	Average	H	28.34/5.30	36.54	46.43	54	7.57
4924.00	50.96	Peak	H	32.95/8.32	36.33	55.90	74	18.10
4924.00	33.59	Average	H	32.95/8.32	36.33	38.53	54	15.47
7311.00	47.21	Peak	H	35.94/12.55	36.33	59.37	74	14.63
7311.00	32.76	Average	H	35.94/12.55	36.33	44.92	54	9.08
N/A								

REMARKS :

1. "*" means the Restricted band.
2. Actual = Reading + AF + CL - Amp Gain
3. For 802.11b Mode, Final test get the worst-case emission at 11 Mbps
4. For 802.11g Mode, Final test get the worst-case emission at 54 Mbps


Test Equipment Used

EQUIPMENT	MANUFACTURER	MODEL	CAL DUE.
Spectrum analyzer	H/P	8593E	Aug. 2006
Test Receiver	Rohde & Schwarz	ESIB 26	Mar. 2006
Preamplifier	Agilent	8449B	May 2006
Log-periodic	Rohde & Schwarz	UHALP9107	Jun. 2006
Biconical Antenna	Schwarzbeck	VHA9103	Mar. 2006
Horn Antenna	Schwarzbeck	BBHA9120D(0600)	Jul. 2006


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

2) Spurious RF Conducted Emissions : Plot of Spurious RF Conducted Emissions 802.11b Mode (11 Mbps)

Low Channel

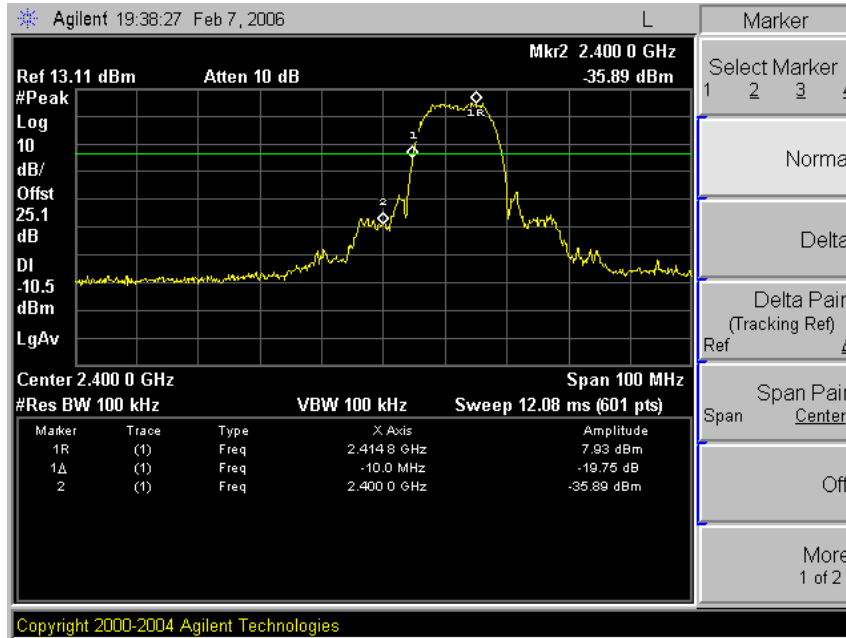


Low Channel

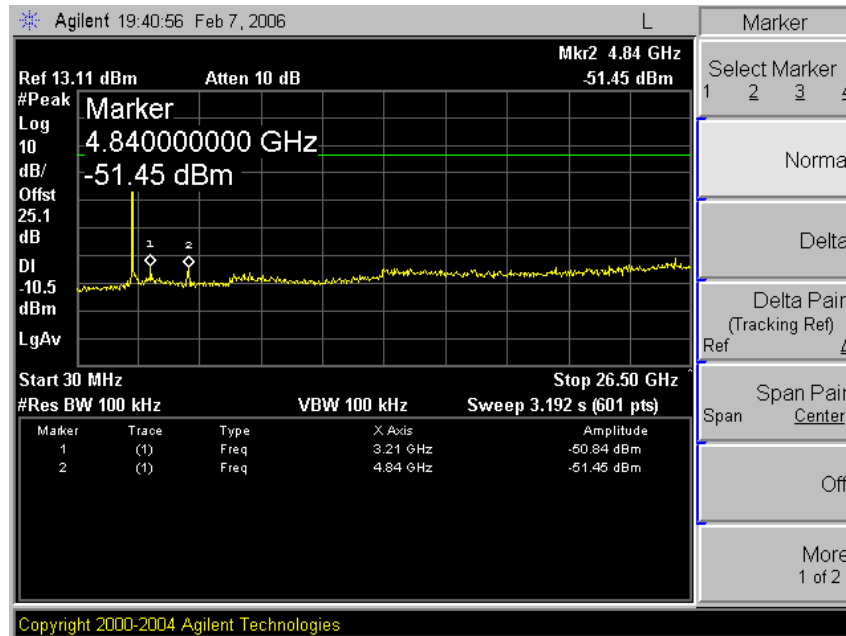


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

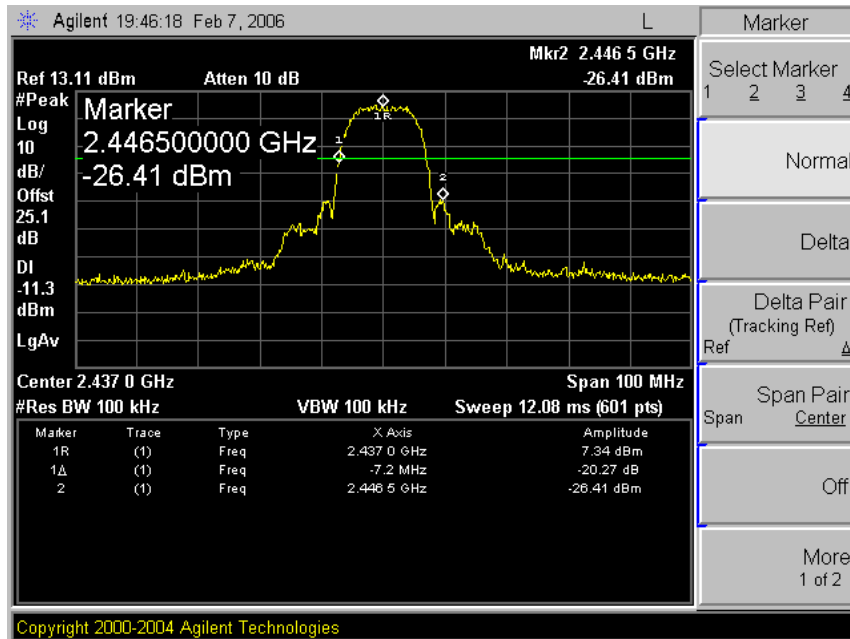


Middle Channel

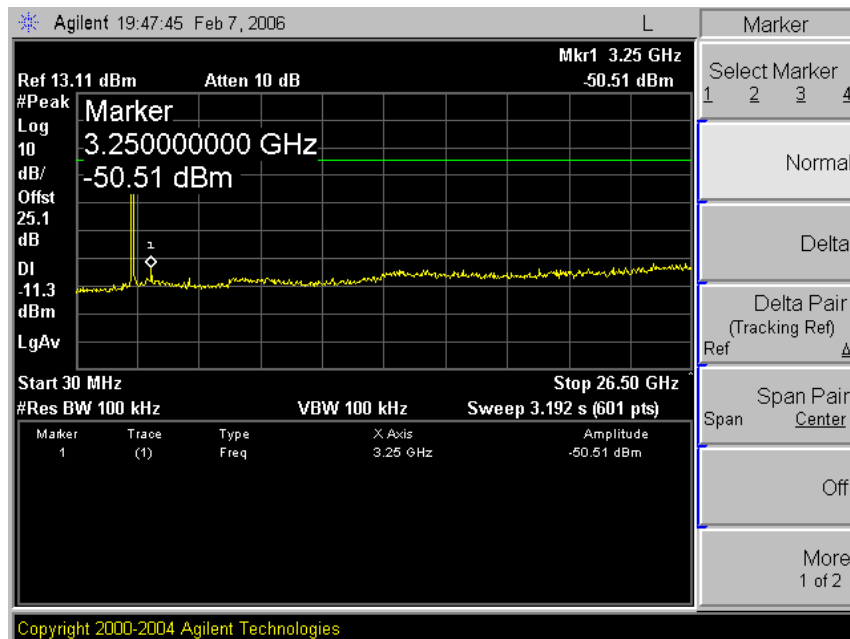


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

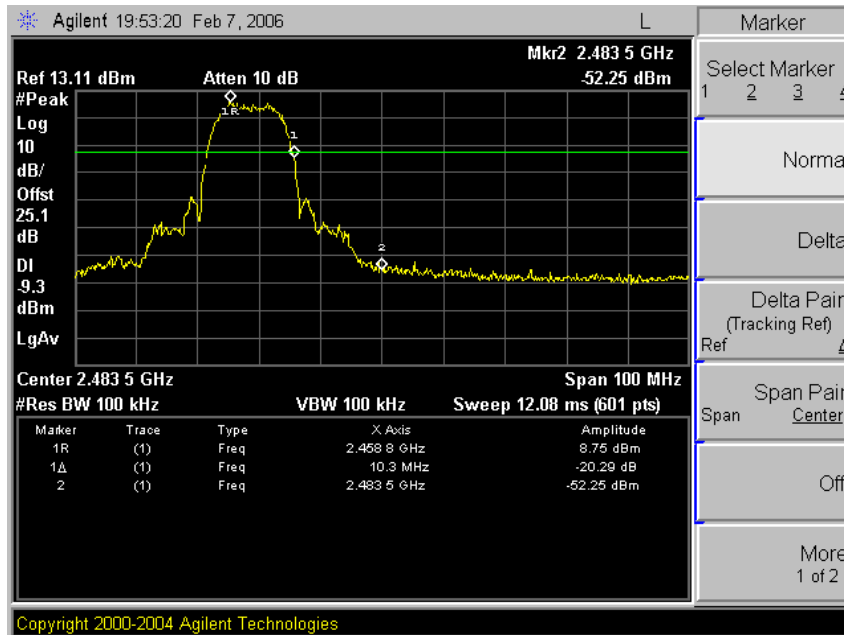


High Channel

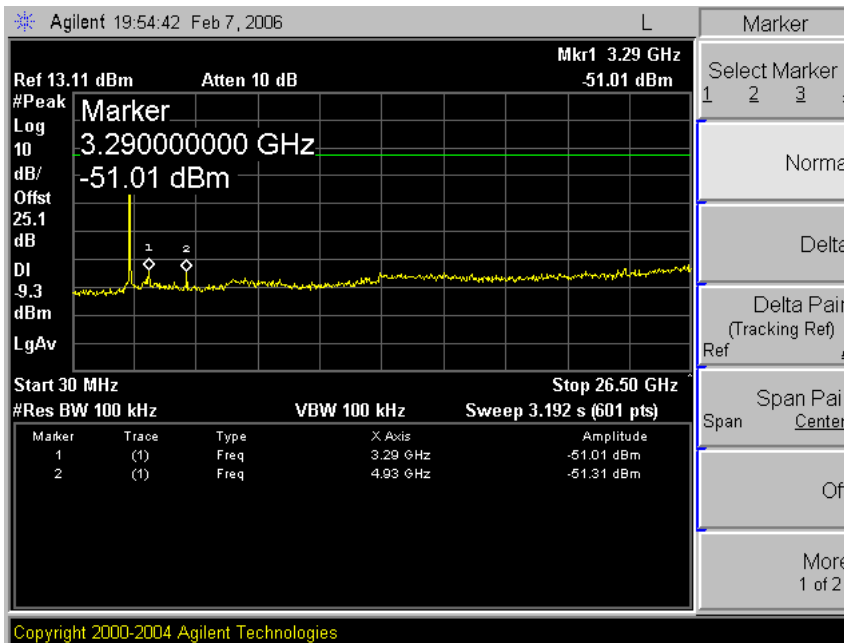


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

802.11g mode (54 Mbps)

Low Channel

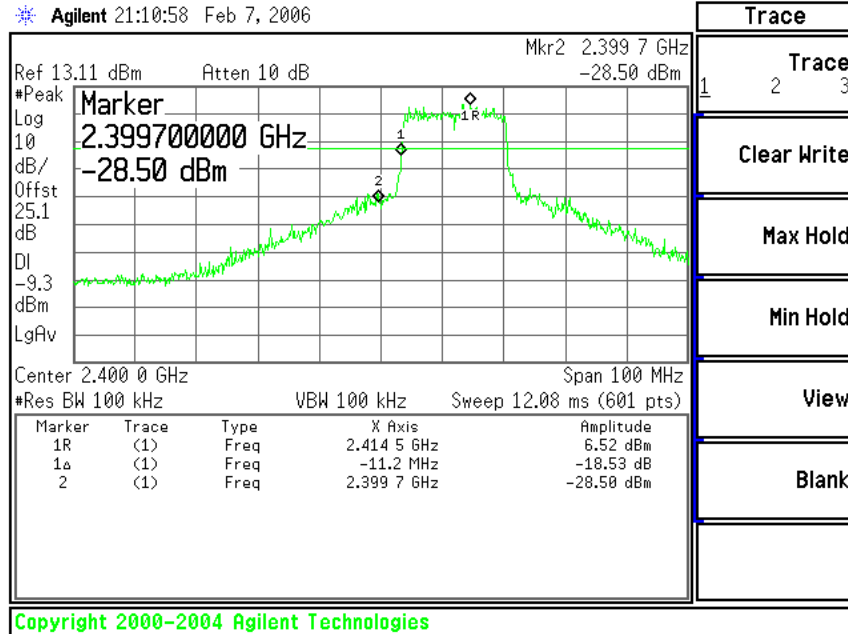


Low Channel

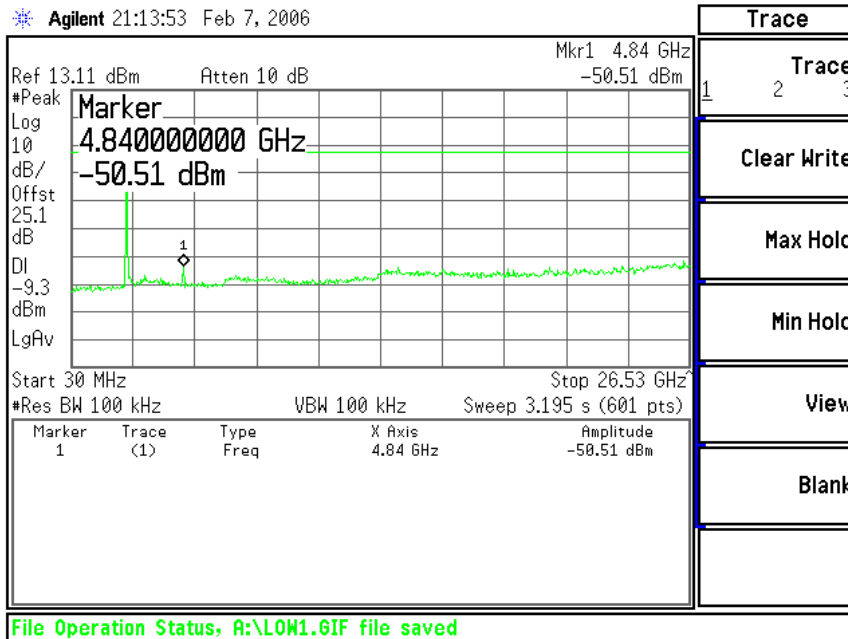


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

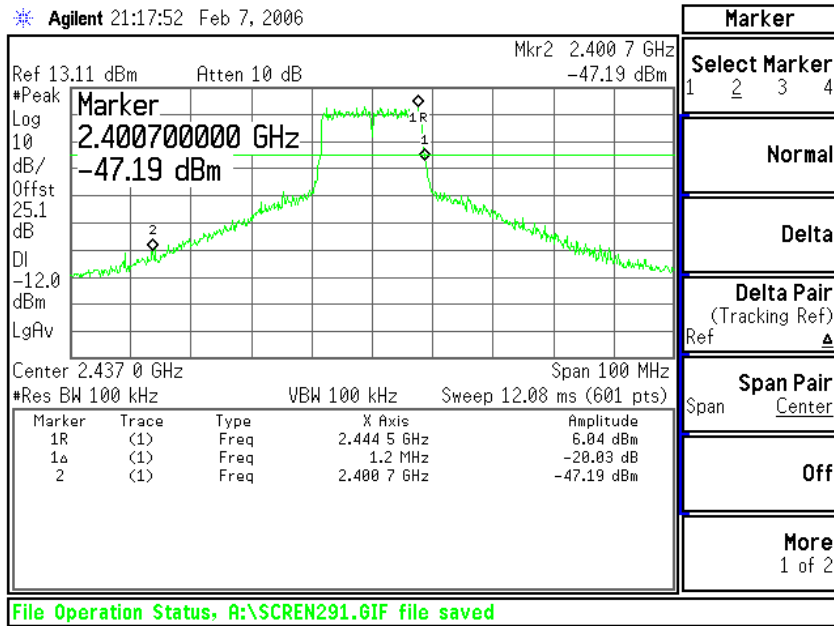


Middle Channel

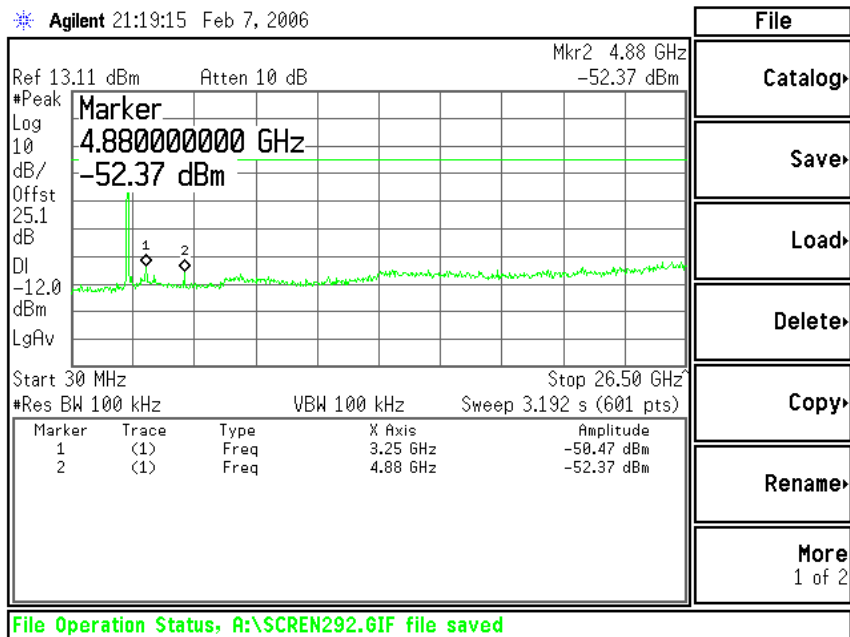


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

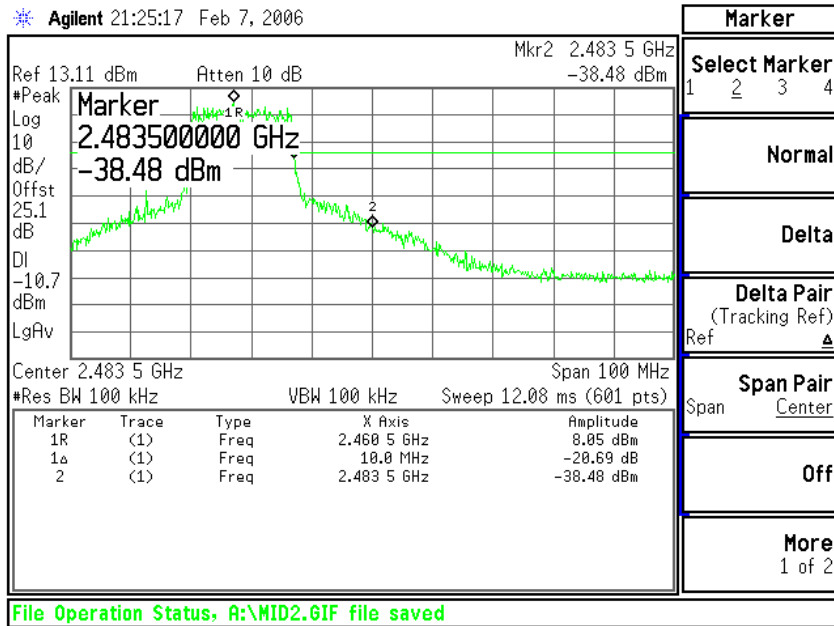

High Channel

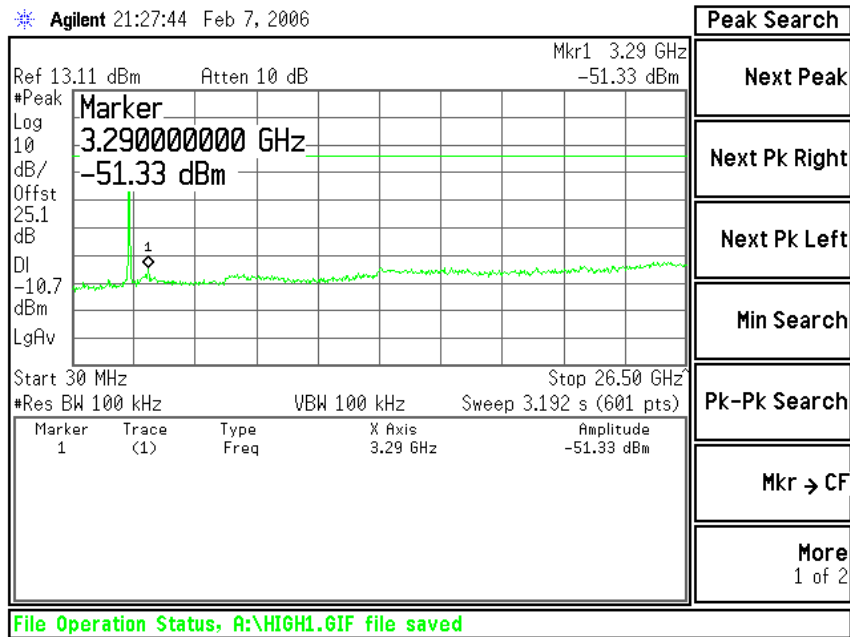

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


Test Equipment Used

EQUIPMENT	MANUFACTURER	MODEL	CAL DUE.
Attenuator	Lucas Weinschel	33-20-33	Dec.2006
Spectrum analyzer	Agilent	E4440A	May 2006

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4. 6dB BANDWIDTH MEASUREMENT

4.1 Test Setup

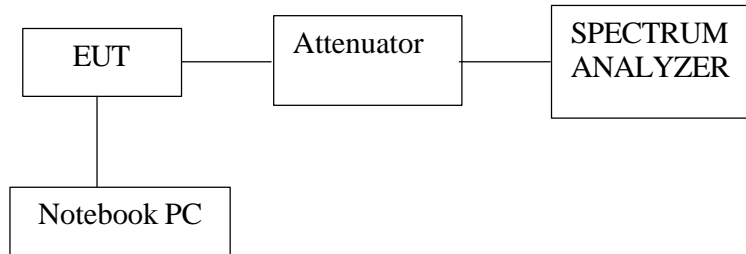

4.2 Limits

According to § 5.247(a)(2), systems using digital modulation techniques may operate in the 902 ~ 928 MHz, 2400 ~ 2483.5 MHz, and 5725 ~ 5825 MHz bands. The minimum of 6dB Bandwidth shall be at least 500 kHz

4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 kHz and VBW=100 kHz. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

4.4 Test Result

Humidity Level	51 %	Temperature	26 ?
----------------	------	-------------	------

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	10.40	0.5
Middle	2437	10.43	0.5
High	2462	10.83	0.5

Note:

1. For 802.11b Mode(11 Mbps)

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	16.43	0.5
Middle	2437	16.47	0.5
High	2462	16.43	0.5

Note:


1. For 802.11g Mode(54 Mbps)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


Plot of 6dB Bandwidth

802.11b Mode (11 Mbps):

Low Channel

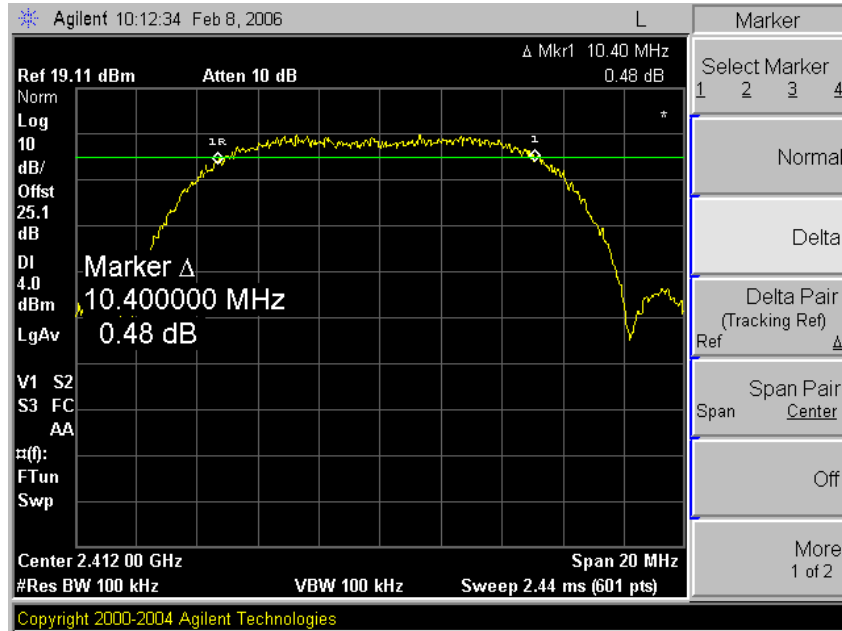


Middle Channel

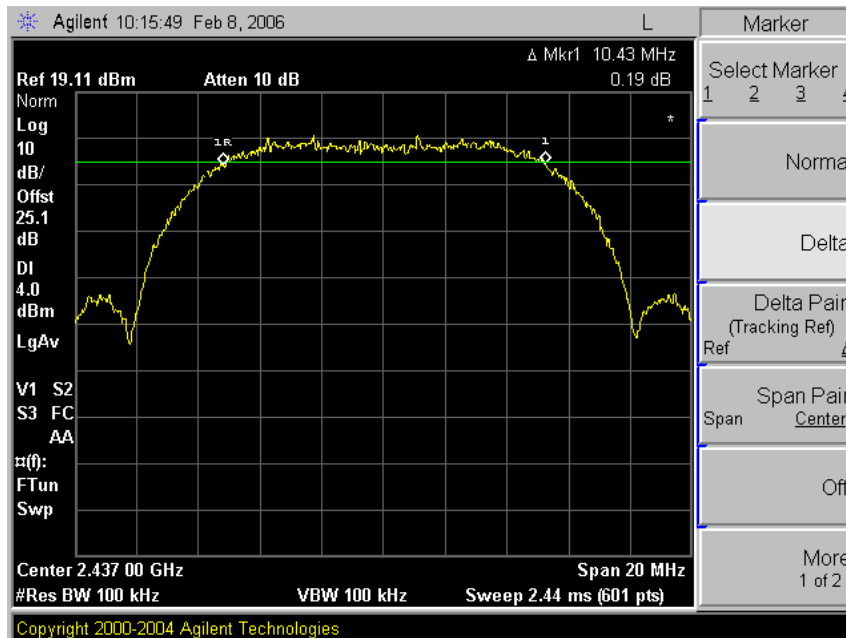

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel

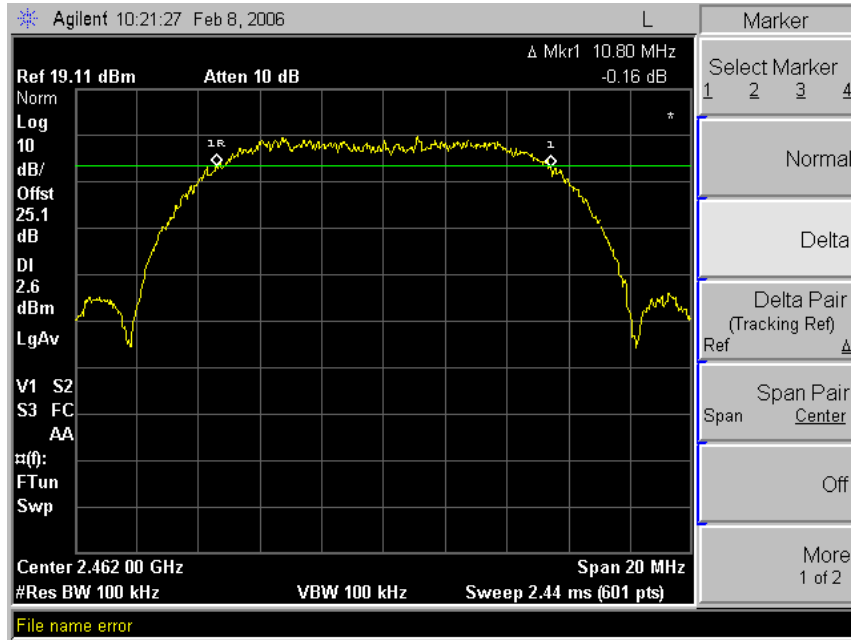


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

802.11g Mode (54Mbps):

Low Channel

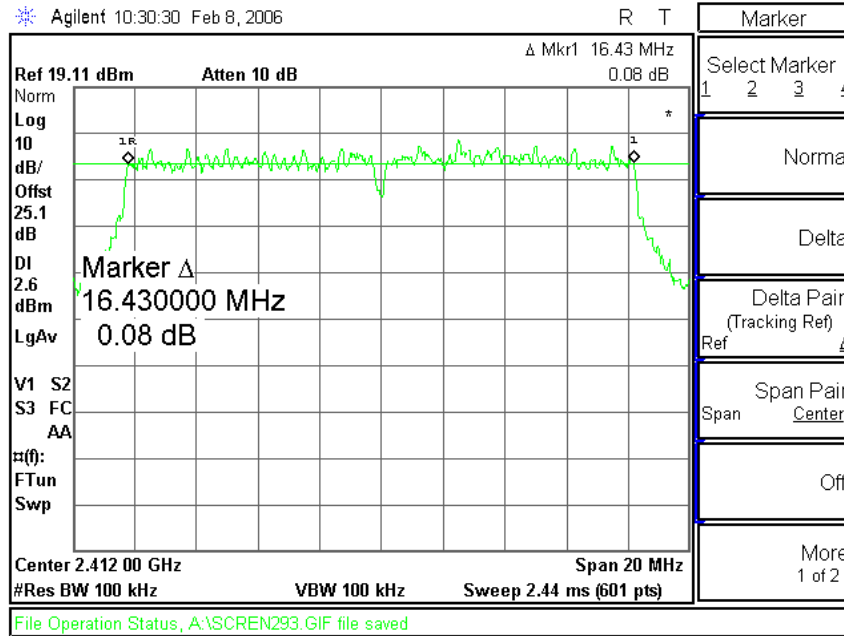


Middle Channel

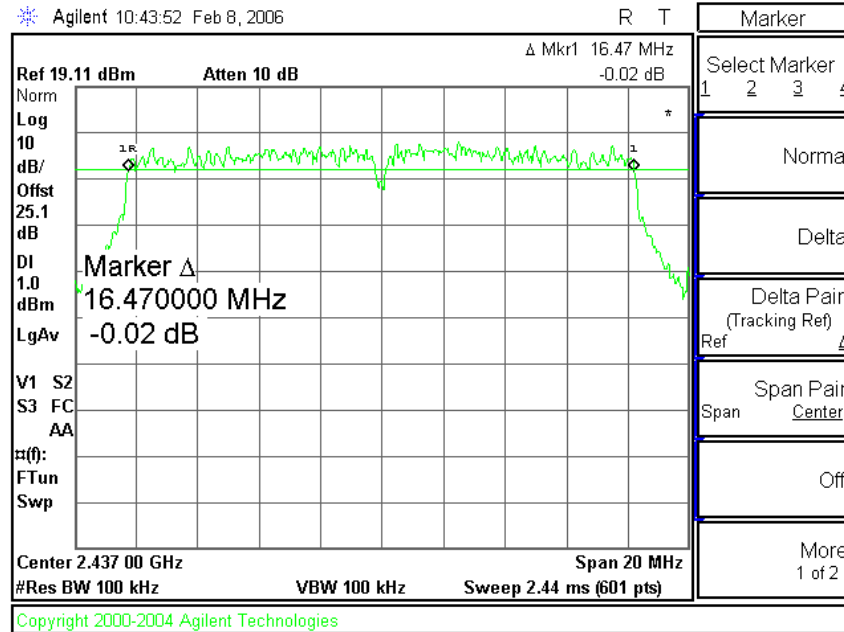

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

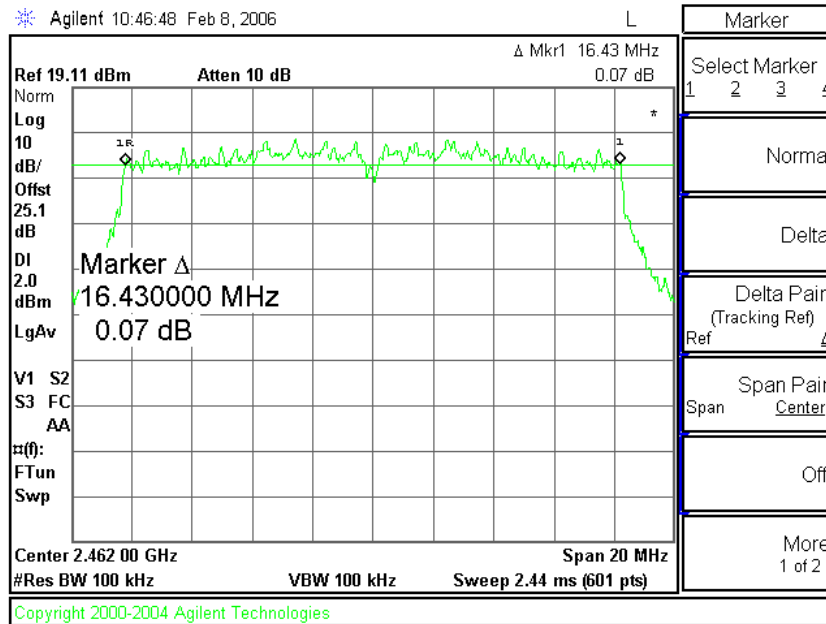


Test Equipment Used

EQUIPMENT	MANUFACTURER	MODEL	CAL DUE.
Attenuator	Lucas Weinschel	33-20-33	Dec.2006
Spectrum analyzer	Agilent	E4440A	May 2006

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

5. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

5.1 Test Setup

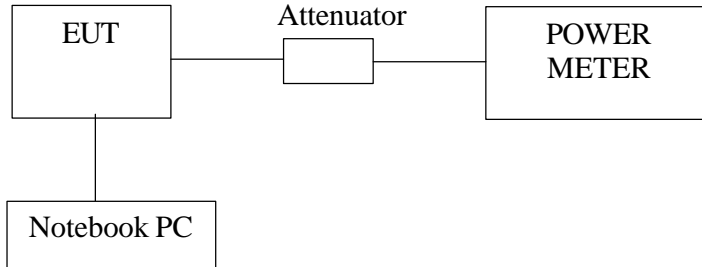

5.2 Limit

According to §15.247(b)(3), for systems using digital modulation in the 902 ~ 928 MHz, 2400 ~ 2483.5 MHz, and 5725 ~ 5850 MHz band: 1 Watt. As an alternative to a peak power measurement, Compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antenna elements. The average must not include any intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), the conducted output power limit specified in paragraph(b) of this section is based on the use of antenna with directional gains that do not exceed 6 dBi. Except as shown in paragraph(c) of this section, if transmitting antenna of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraph(b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

5.3 Test Procedure

The RF power output was measured with a Power meter connected to the Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

5.4 Test Result

Humidity Level	51 %	Temperature	26 ?
----------------	------	-------------	------

Antenna Port

Channel	Channel Frequency (MHz)	Average Power Output (dBm)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Margin (dB)
Low	2412	16.50	17.29	30	12.71
Middle	2437	16.79	17.42	30	12.58
High	2462	17.00	17.82	30	12.18

Note:

1. For 802.11b mode.(11 Mbps)
2. Cable loss = 5.1 dB, Attenuator = 20 dB.
3. The results are calculated as the following equation :
4. Peak Power Output = Peak Power Reading + Cable loss + Attenuator

Channel	Channel Frequency (MHz)	Average Power Output (dBm)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Margin (dB)
Low	2412	15.42	21.81	30	8.19
Middle	2437	15.30	22.40	30	7.60
High	2462	15.50	22.71	30	7.29

Note:

1. For 802.11g mode.(54 Mbps)
2. Cable loss = 5.1 dB, Attenuator = 20 dB.
3. The results are calculated as the following equation :
4. Peak Power Output = Peak Power Reading + Cable loss + Attenuator


Test Equipment Used

EQUIPMENT	MANUFACTURER	MODEL	CAL DUE.
Attenuator	Lucas Weinschel	33-20-33	Dec.2006
Power Sensor	Agilent	E9327A	May 2006
Power Meter	Agilent	E4416A	May 2006

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6. POWER SPECTRAL DENSITY MEASUREMENT

6.1 Test Setup

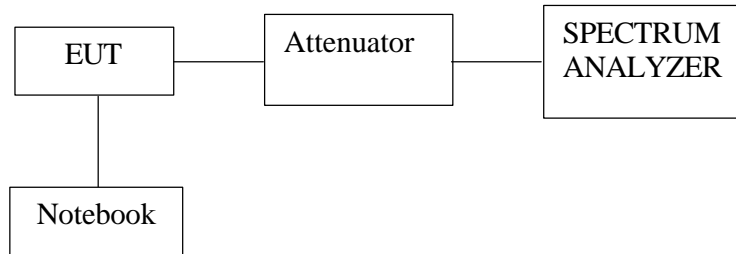

6.2 Limit

According to §5.247(e), For digitally modulated system, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph(b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density

6.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=3 kHz and VBW>=3 kHz, set sweep time=span / 3 kHz.

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3 kHz for a full response of the mixer in the spectrum analyzer.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

6.4 Test Result

Humidity Level	51 %	Temperature	26 ?
----------------	------	-------------	------

Channel	Channel Frequency (MHz)	Final RF Power Level in 3 kHz BW (dBm)	Maximum Limit (dBm)	Margin (dB)
Low	2412	-6.78	8	14.78
Middle	2437	-6.47	8	14.47
High	2462	-6.11	8	14.11

Note :

1. For 11 Mbps (802.11b mode).

Channel	Channel Frequency (MHz)	Final RF Power Level in 3 kHz BW (dBm)	Maximum Limit (dBm)	Margin (dB)
Low	2412	-10.63	8	18.63
Middle	2437	-12.27	8	20.27
High	2462	-12.13	8	20.13


Note :

1. For 54 Mbps (802.11g mode)


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Plot of Power Spectral Density
 802.11b Mode (11 Mbps):

Low Channel

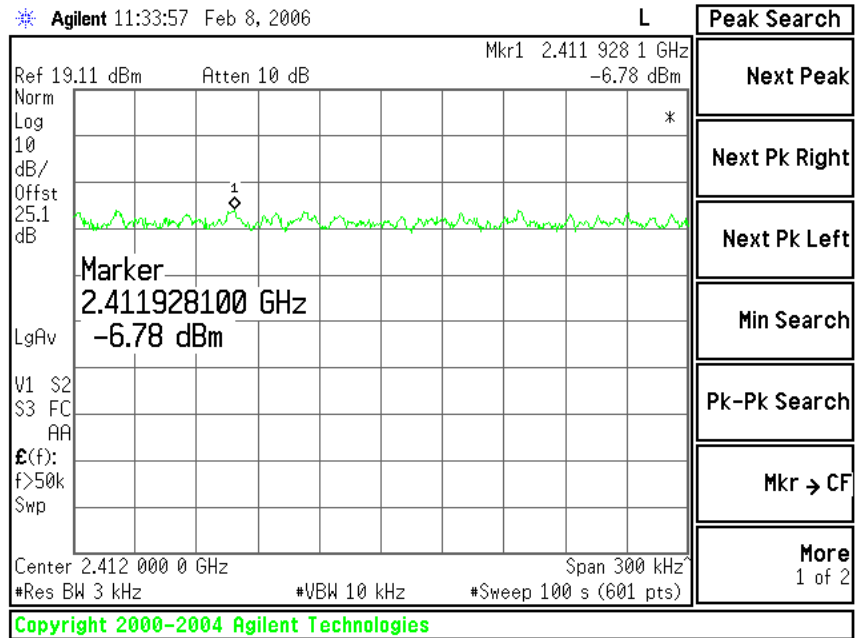


Middle Channel

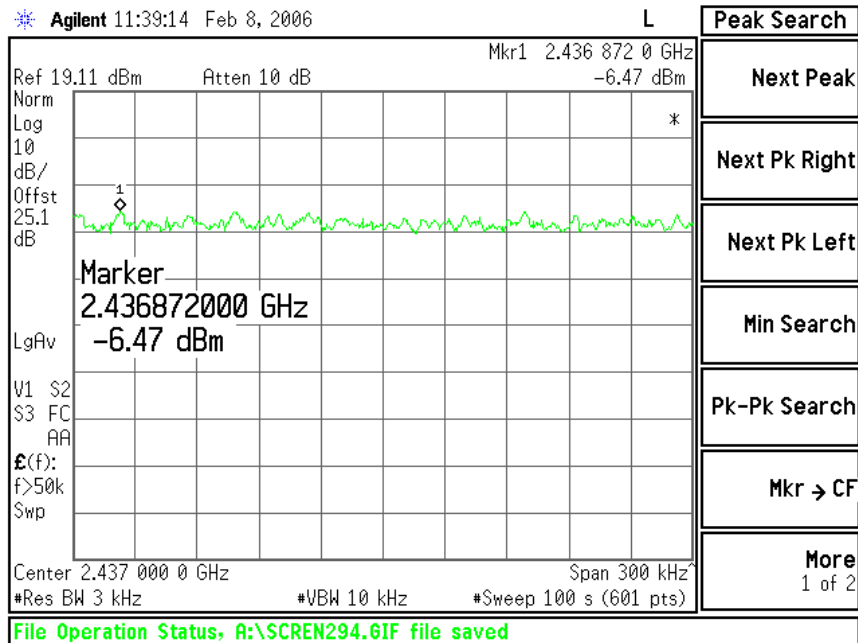

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel

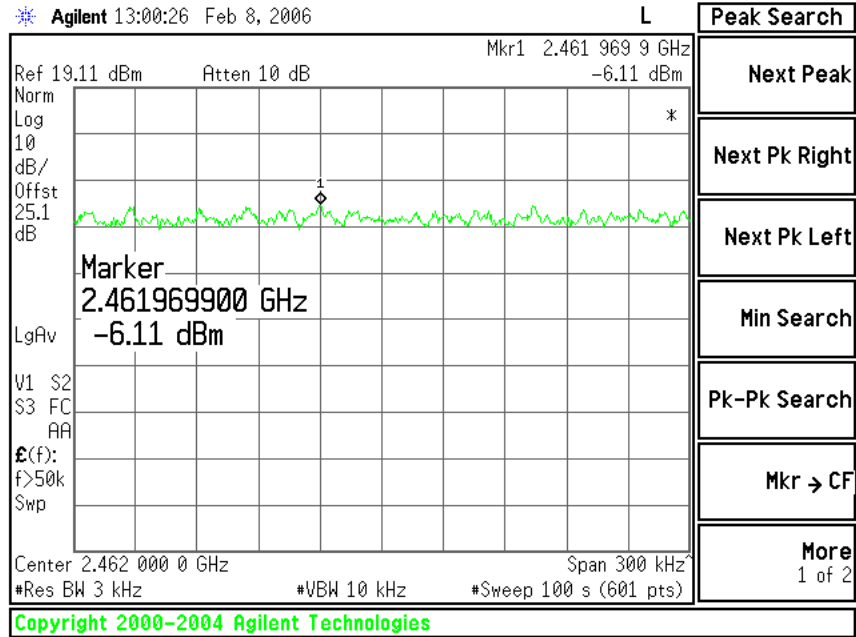


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

802.11g Mode (54 Mbps):

Low Channel

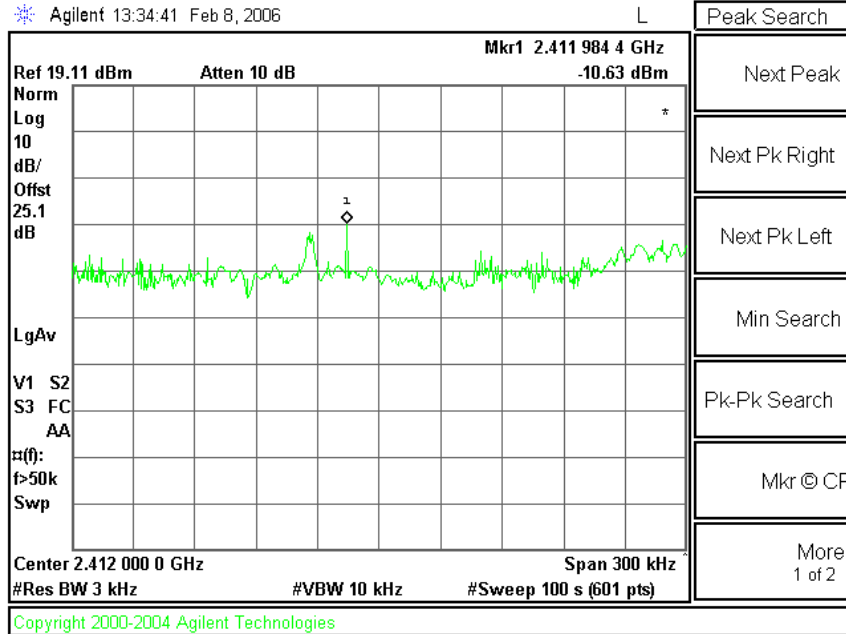


Middle Channel

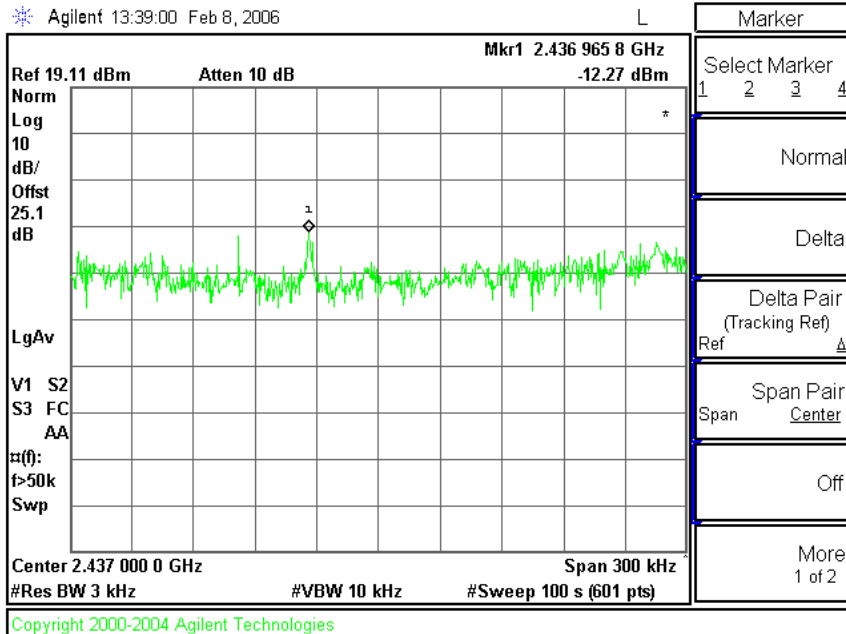

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

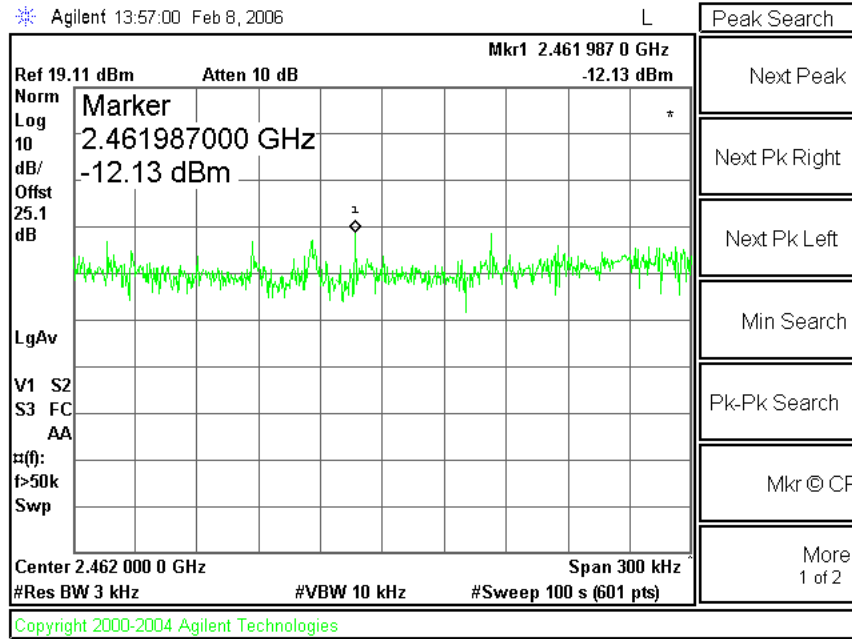

Test Equipment Used

EQUIPMENT	MANUFACTURER	MODEL	CAL DUE.
Attenuator	Lucas Weinschel	33-20-33	Dec.2006
Spectrum analyzer	Agilent	E4440A	May 2006

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

7.ANTENNA REQUIREMENT

7.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section § 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the gain of the antenna exceeds 6dBi.

7.2 Antenna Connected Construction

Antenna used in this product is fixed in chip antenna gain of 0.68 dBi(2.4 GHz)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

8. Attachment A-1 Photo of the test set up

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Attachment A-2 Photos of the test set up

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.