



**FCC CFR47 PART 15 SUBPART C**

**DTS Wireless LAN**

**CERTIFICATION TEST REPORT**

**FOR**

**Bluetooth/BLE, DTS/UNII a/b/g/n/ac Tablet**

**MODEL NUMBER : SM-W700, SM-W703**

**FCC ID: A3LSMW700**

**REPORT NUMBER: 15K21999-E1**

**ISSUE DATE: JAN 27, 2016**

*Prepared for*  
**SAMSUNG ELECTRONICS CO., LTD.**  
**129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,**  
**GYEONGGI-DO, 16677, KOREA**

*Prepared by*  
**UL Korea, Ltd. Suwon Laboratory**  
**218 Maeyeong-ro, Yeongtong-gu,**  
**Suwon-si, Gyeonggi-do, 16675, Korea**  
**TEL: (031) 337-9902**  
**FAX: (031) 213-5433**



---

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	01/19/16	Initial issue	SungGil Park
2	01/25/16	Revised frequency range at section 5.2 & 5.4	SungGil Park
3	01/27/16	Revised output power at section 5.2, 9 & 10.3	SungGil Park

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>5</b>
<b>2. TEST METHODOLOGY</b> .....	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	6
4.2. <i>SAMPLE CALCULATION</i> .....	6
4.3. <i>MEASUREMENT UNCERTAINTY</i> .....	7
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>8</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	8
5.2. <i>MAXIMUM OUTPUT POWER</i> .....	9
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	9
5.4. <i>LIST OF TEST REDUCTION AND MODES</i> .....	9
5.5. <i>WORST-CASE CONFIGURATION AND MODE</i> .....	9
5.6. <i>DESCRIPTION OF TEST SETUP</i> .....	10
<b>6. TEST AND MEASUREMENT EQUIPMENT</b> .....	<b>12</b>
<b>7. MEASUREMENT METHODS</b> .....	<b>13</b>
<b>8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS</b> .....	<b>13</b>
8.1. <i>ON TIME AND DUTY CYCLE RESULTS</i> .....	13
<b>9. SUMMARY TABLE</b> .....	<b>14</b>
<b>10. ANTENNA PORT TEST RESULTS</b> .....	<b>15</b>
10.1. <i>6 dB BANDWIDTH</i> .....	15
10.1.1. 802.11b MODE IN THE 2.4 GHz BAND.....	16
10.1.2. 802.11g MODE IN THE 2.4 GHz BAND.....	16
10.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND.....	16
10.1.4. 6 dB BANDWIDTH PLOTS.....	17
10.2. <i>99% BANDWIDTH</i> .....	23
10.2.1. 802.11b MODE IN THE 2.4 GHz BAND.....	23
10.2.2. 802.11g MODE IN THE 2.4 GHz BAND.....	23
10.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND.....	23
10.2.4. 99% BANDWIDTH PLOTS.....	24
10.3. <i>OUTPUT POWER</i> .....	30
10.3.1. 802.11b MODE IN THE 2.4 GHz BAND.....	31
10.3.2. 802.11g MODE IN THE 2.4 GHz BAND.....	32

10.3.3.	802.11n HT20 MODE IN THE 2.4 GHz BAND .....	33
10.4.	<i>PSD</i> .....	34
10.4.1.	802.11b MODE IN THE 2.4 GHz BAND .....	34
10.4.2.	802.11g MODE IN THE 2.4 GHz BAND .....	34
10.4.3.	802.11n HT20 MODE IN THE 2.4 GHz BAND .....	35
10.4.4.	PSD PLOTS .....	36
10.5.	<i>OUT-OF-BAND EMISSIONS</i> .....	42
10.5.1.	802.11b MODE IN THE 2.4 GHz BAND .....	43
10.5.2.	802.11g MODE IN THE 2.4 GHz BAND .....	47
10.5.3.	802.11n HT20 MODE IN THE 2.4 GHz BAND .....	51
<b>11.</b>	<b>RADIATED TEST RESULTS</b> .....	<b>55</b>
11.1.	<i>LIMITS AND PROCEDURE</i> .....	55
11.2.	<i>TRANSMITTER ABOVE 1 GHz</i> .....	56
11.2.1.	TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND .....	56
11.2.2.	TX ABOVE 1 GHz 802.11g 2TX CDD MODE IN THE 2.4 GHz BAND .....	74
11.2.3.	TX ABOVE 1 GHz 802.11n HT20 2TX CDD MODE IN THE 2.4 GHz BAND.....	92
11.3.	<i>WORST-CASE BELOW 1 GHz</i> .....	110
<b>12.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS</b> .....	<b>112</b>
<b>13.</b>	<b>SETUP PHOTOS</b> .....	<b>115</b>

# 1. ATTESTATION OF TEST RESULTS


**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.  
**EUT DESCRIPTION:** Bluetooth/BLE, DTS/UNII a/b/g/n/ac Tablet  
**MODEL NUMBER:** SM-W700, SM-W703  
**SERIAL NUMBER:** 8JA3R32GB000LST, 8JA3R32GB000MZX (RADIATED);  
123490EN400015 (CONDUCTED)  
**DATE TESTED:** OCT 14, 2015 - JAN 19, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:



CY Choi  
Suwon Lab Engineer  
UL Korea, Ltd.

Tested By:



SungGil Park  
Suwon Lab Engineer  
UL Korea, Ltd.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro
<input checked="" type="checkbox"/> Chamber 1
<input checked="" type="checkbox"/> Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth/BLE, DTS/UNII a/b/g/n/ac Tablet.

This test report addresses the DTS (WLAN) operational mode.

WiFi MIMO Condition

Frequency	Mode	Antenna 1	Antenna 2
2.4 GHz	802.11b	TX / RX	TX / RX
	802.11g	TX / RX	TX / RX
	802.11n	TX / RX	TX / RX
	802.11n MIMO	TX / RX	TX / RX
5 GHz	802.11a	TX / RX	TX / RX
	802.11n	TX / RX	TX / RX
	802.11ac	TX / RX	TX / RX
	802.11n/ac MIMO	TX / RX	TX / RX

## 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Frequency Range [MHz]	Mode	Output Power [dBm]		Output Power [mW]	
		Antenna1	Antenna2	Antenna1	Antenna2
2412 - 2472	802.11b	16.31	16.36	42.76	43.25
	802.11g	14.22	14.29	26.42	26.85
	802.11g MIMO	17.26		53.21	
	802.11n SISO	14.41	14.02	27.61	25.23
	802.11n MIMO	17.20		52.48	

## 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes FPCB antennas, with a antenna1's maximum gain of -1.54 dBi and antenna2's maximum gain of -1.67 dBi .

## 5.4. LIST OF TEST REDUCTION AND MODES

The output power on covered modes is equal to or less than one referenced.

2400 - 2483.5 MHz Authorized Frequency Band (Antenna Port & Radiated Testing)		
Frequency Range (MHz)	Mode	Covered by
2412 - 2472	802.11b Legacy 1TX	802.11b Legacy 1TX
	802.11g Legacy 1TX	802.11g CDD 2TX
	802.11n 1TX	802.11n HT20 CDD 2TX
	802.11n STBC 2TX	802.11n HT20 CDD 2TX

## 5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps  
 802.11g mode: 6 Mbps  
 802.11n HT20 mode: MCS0

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA300	R37GALZGRB1SE3	N/A
Data Cable	SAMSUNG	EP-DW700CWE	N/A	N/A
Earphone	SAMSUNG	EO-HS3303WE	N/A	N/A


### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A
2	Audio	1	Mini-Jack	Unshielded	1.0m	N/A

### TEST SETUP

The EUT is a stand-alone unit during the tests. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

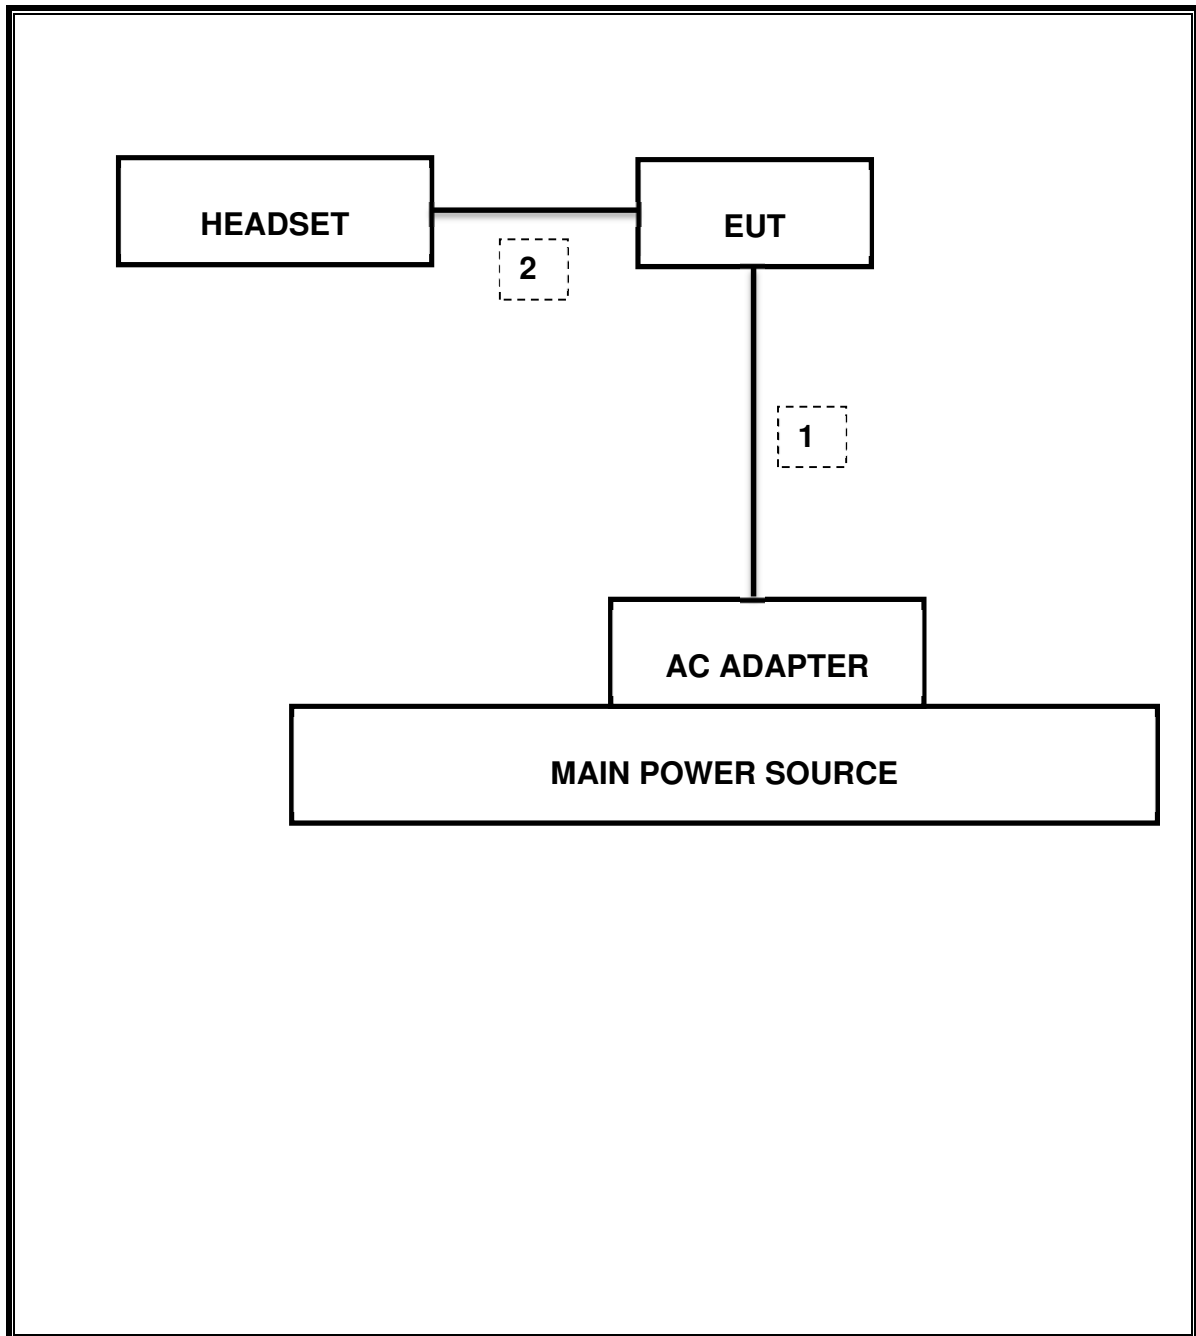

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	11-17-16
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-25-17
Antenna, Horn, 18 GHz	ETS	3115	00167211	09-26-16
Antenna, Horn, 18 GHz	ETS	3115	00161451	05-17-17
Antenna, Horn, 18 GHz	ETS	3117	00168724	06-17-17
Antenna, Horn, 18 GHz	ETS	3117	00168717	06-17-17
Antenna, Horn, 40 GHz	ETS	3116C	00166155	09-23-16
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	08-24-17
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-18-16
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-18-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-19-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-19-16
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	08-18-16
Average Power Sensor	R&S	NRZ-Z91	102681	08-18-16
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-18-16
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-19-16
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-19-16
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-19-16
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	009	08-18-16
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	015	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	009	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	010	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	016	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	015	08-18-16
LISN	R&S	ENV-216	101836	08-19-16
LISN	R&S	ENV-216	101837	08-19-16

## 7. MEASUREMENT METHODS

KDB 558074 D01 DTS Meas Guidance v03r04: Measurement Procedure §9.2.3.1 AVGPM is used for average power and §10.2 AVGPSD-2 is used for power spectral density.

Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

Band edge emissions within Restricted Bands are measured using RMS with duty cycle factor offset method.


## 8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

### LIMITS

None; for reporting purposes only.

### 8.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B [msec]	Period [msec]	Duty Cycle x [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
<b>2400MHz Bands</b>						
802.11b	8.43	8.539	0.987	98.7%	0.00	0.010
802.11g	1.399	1.508	0.928	92.8%	0.33	0.715
802.11n HT20	1.307	1.416	0.923	92.3%	0.35	0.765

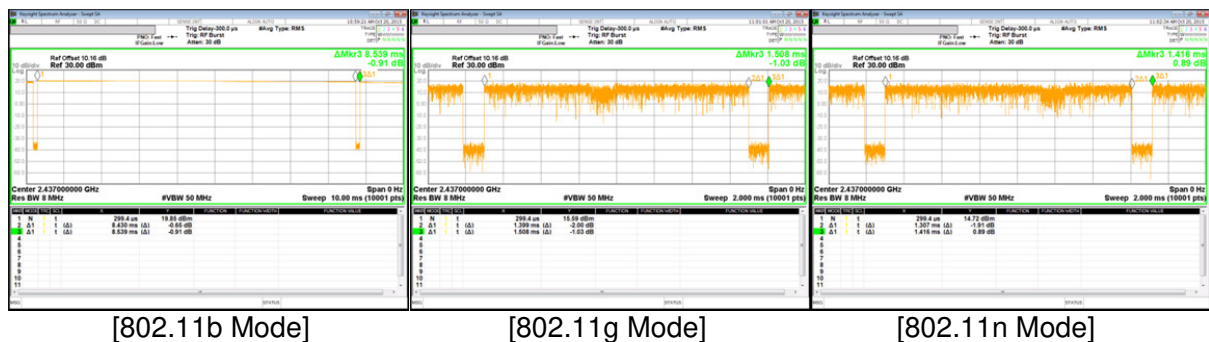

## 9. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	8.047 MHz
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-34.751 dBm
15.247	TX conducted output power	<30dBm		Pass	17.26 dBm (AV)
15.247	PSD	<8dBm		Pass	-9.12 dBm (AV)
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass	48.93 dBuV (QP)
15.205, 15.209	Radiated Spurious Emission	< 40dBuV/m	Radiated	Pass	31.68 dBuV/m (QP)

## 10. ANTENNA PORT TEST RESULTS

### 10.1. 6 dB BANDWIDTH

#### LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST PROCEDURE

Reference to KDB 558074 D01 DTS Meas Guidance v03r04: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW  $\geq 3 \times$  RBW, peak detector and max hold.

**RESULTS**

**10.1.1. 802.11b MODE IN THE 2.4 GHz BAND**

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
		Primary Antenna 1	Secondary Antenna 2	
Low	2412	8.047	8.059	0.5
Mid	2437	8.059	8.060	0.5
High	2462	8.055	8.059	0.5
12	2467	8.058	8.059	0.5
13	2472	8.059	8.062	0.5
Worst		8.047		


**10.1.2. 802.11g MODE IN THE 2.4 GHz BAND**


Channel	Frequency [MHz]	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
		Primary Antenna 1	Secondary Antenna 2	
Low	2412	15.925	15.922	0.5
Mid	2437	15.931	15.687	0.5
High	2462	15.779	16.035	0.5
12	2467	16.067	16.023	0.5
13	2472	16.033	16.049	0.5
Worst		15.687		


**10.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND**

Channel	Frequency [MHz]	6 dB Bandwidth [MHz]		Minimum Limit [MHz]
		Chain 0	Chain 1	
Low	2412	16.911	16.305	0.5
Mid	2437	15.981	15.508	0.5
High	2462	16.770	16.804	0.5
12	2467	16.798	16.800	0.5
13	2472	16.801	16.527	0.5
Worst		15.508		

**10.1.4. 6 dB BANDWIDTH PLOTS**

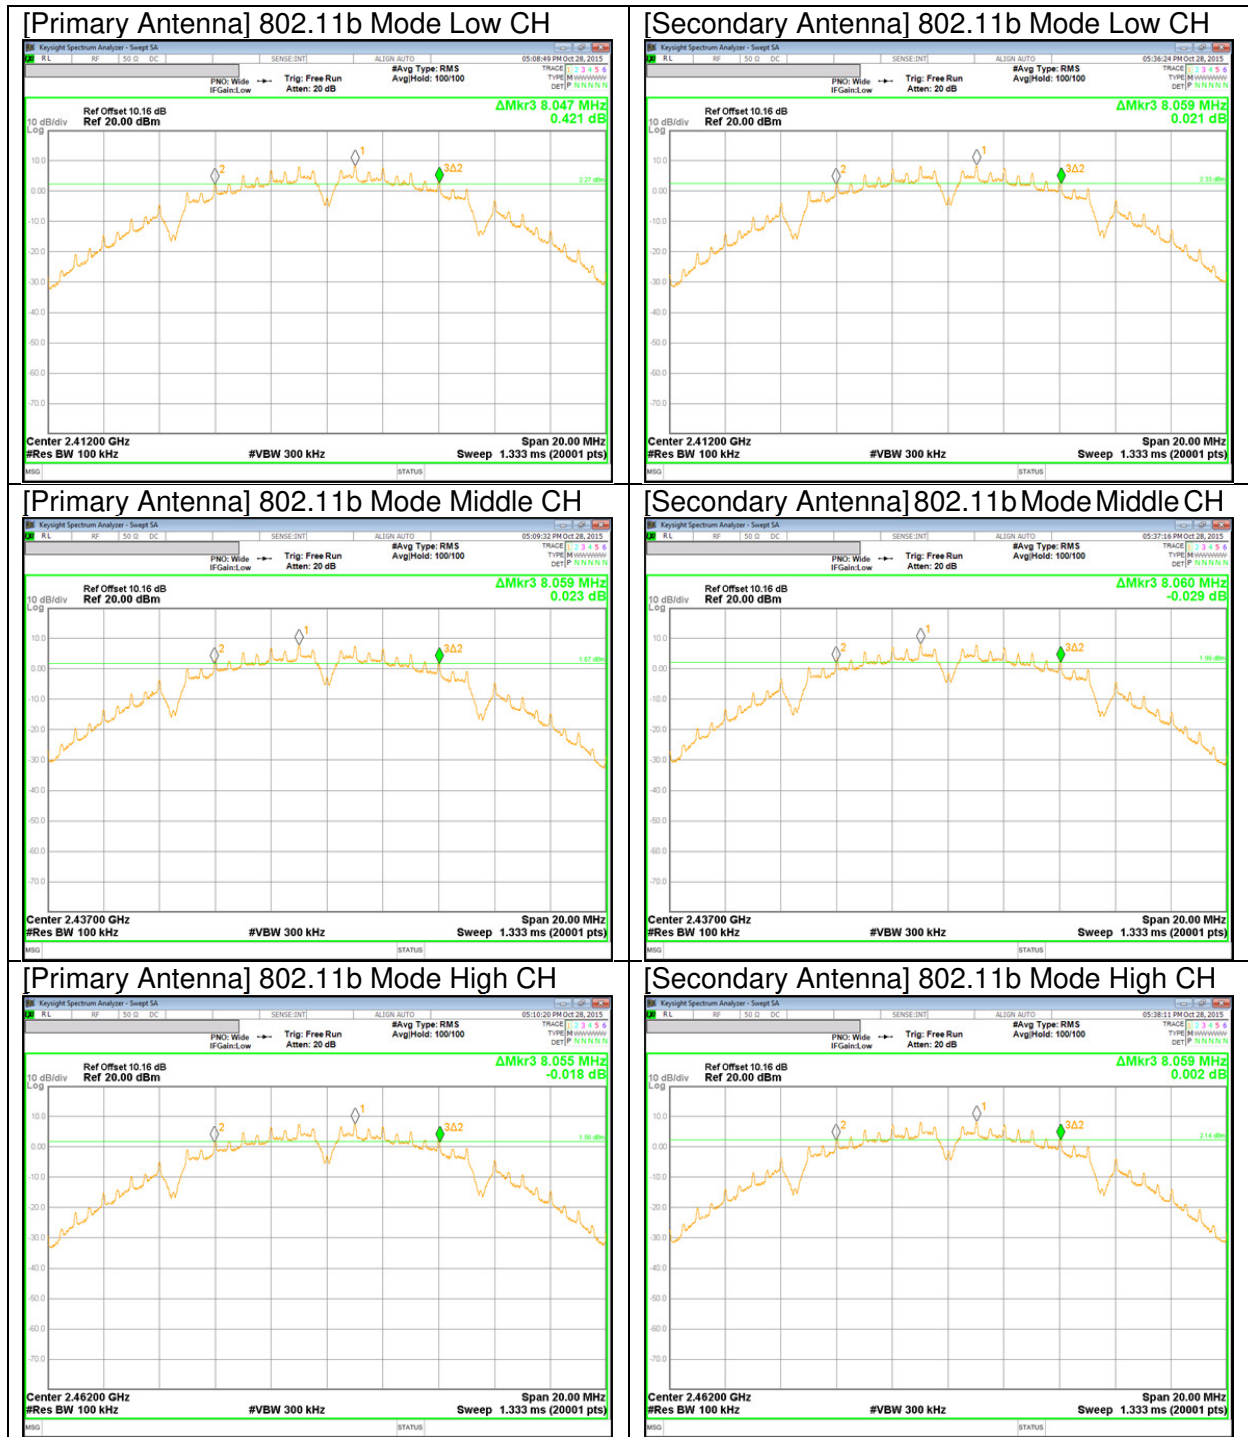


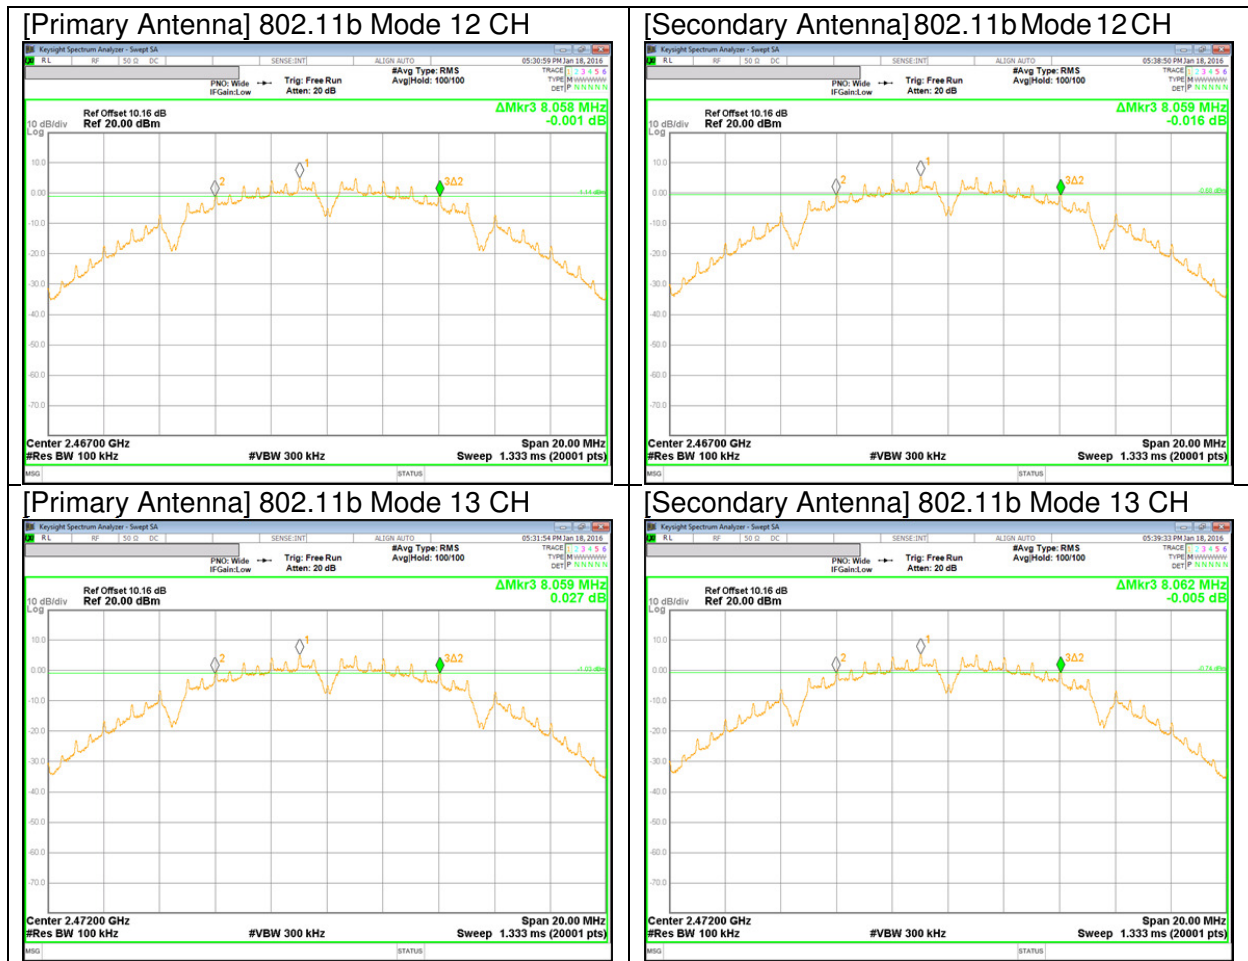

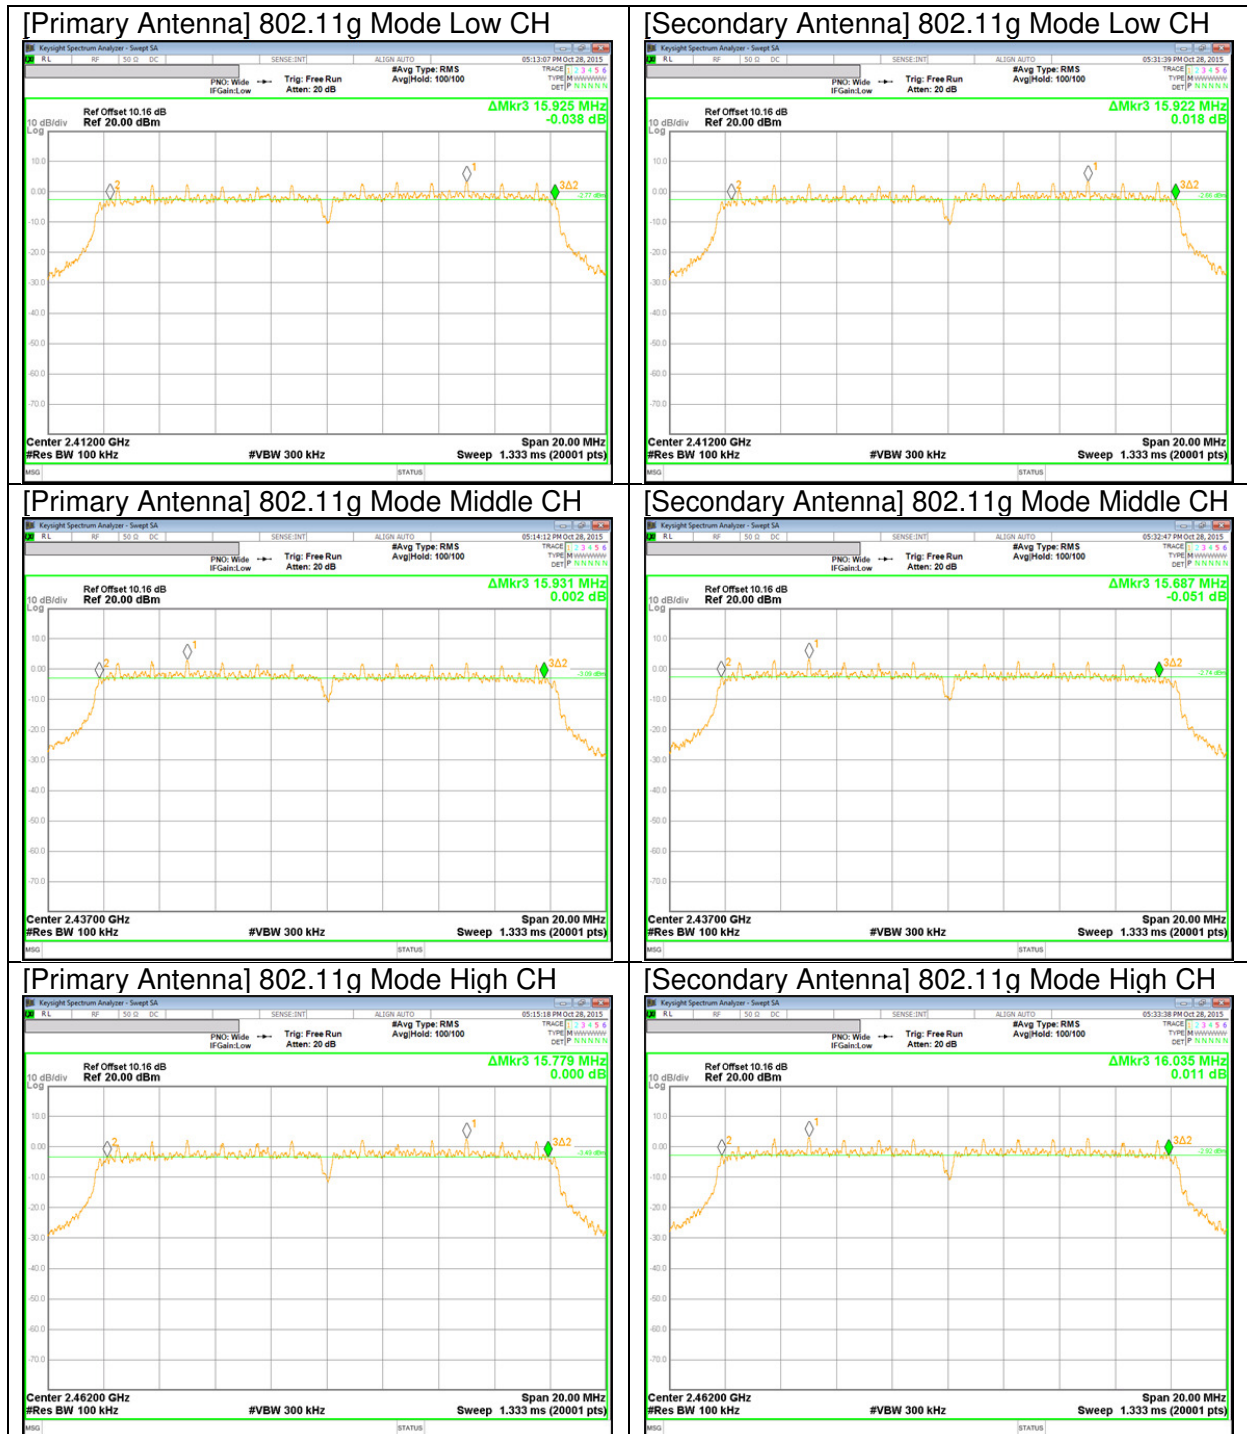





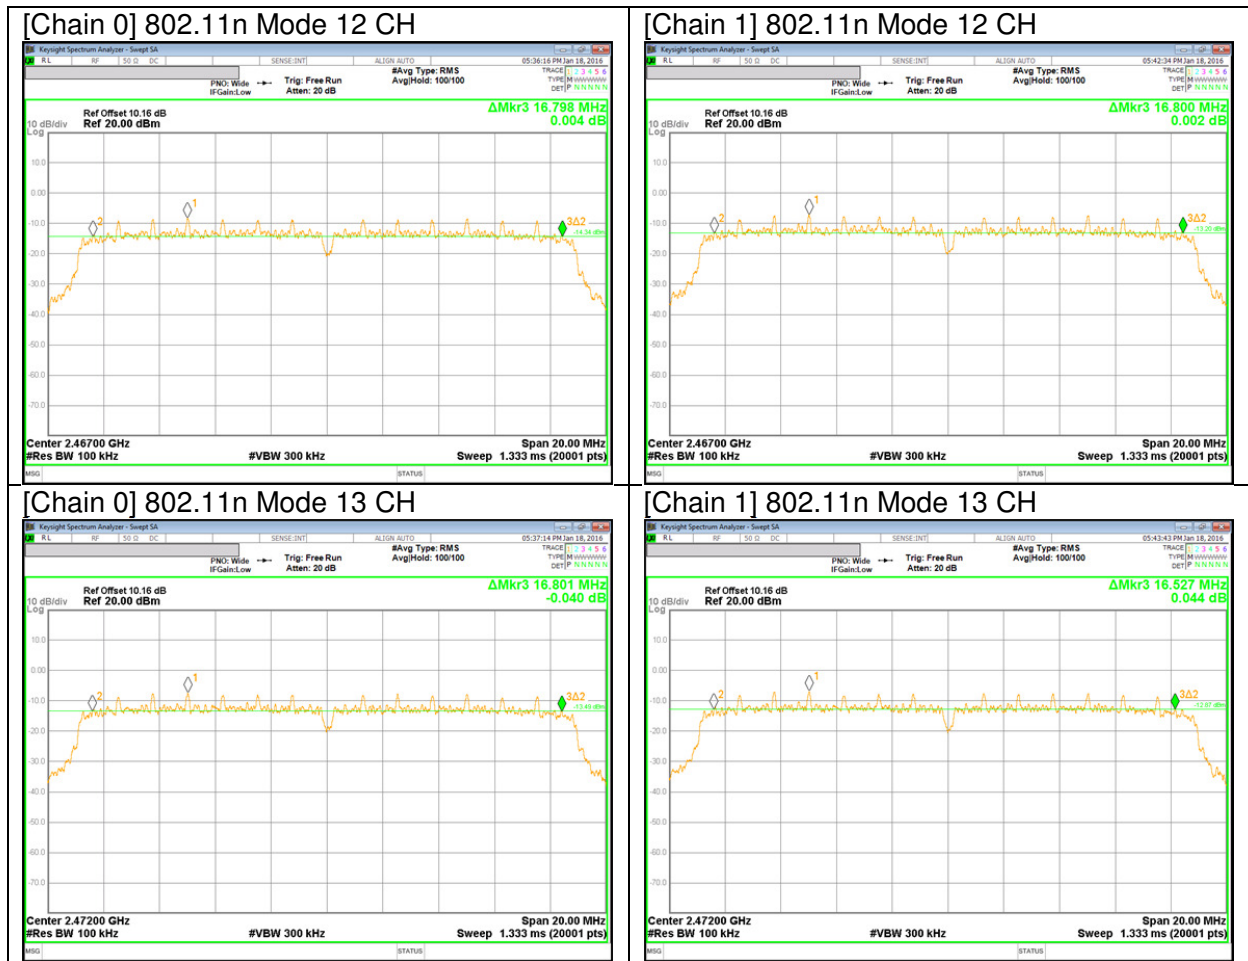

## 10.2. 99% BANDWIDTH

### LIMITS

None; for reporting purposes only.

### RESULTS

#### 10.2.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Primary Antenna 1	Secondary Antenna 2
Low	2412	12.964	13.024
Mid	2437	13.063	13.013
High	2462	12.844	12.920
12	2467	12.847	12.975
13	2472	12.980	13.043
Worst		12.844	


#### 10.2.2. 802.11g MODE IN THE 2.4 GHz BAND


Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Primary Antenna 1	Secondary Antenna 2
Low	2412	16.409	16.396
Mid	2437	16.421	16.418
High	2462	16.345	16.375
12	2467	16.372	16.389
13	2472	16.358	16.379
Worst		16.345	


#### 10.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND


Channel	Frequency [MHz]	99% Bandwidth [MHz]	
		Primary Antenna 1	Secondary Antenna 2
Low	2412	17.573	17.620
Mid	2437	17.584	17.582
High	2462	17.593	17.580
12	2467	17.556	17.620
13	2472	17.578	17.562
Worst		17.556	


**10.2.4. 99% BANDWIDTH PLOTS**

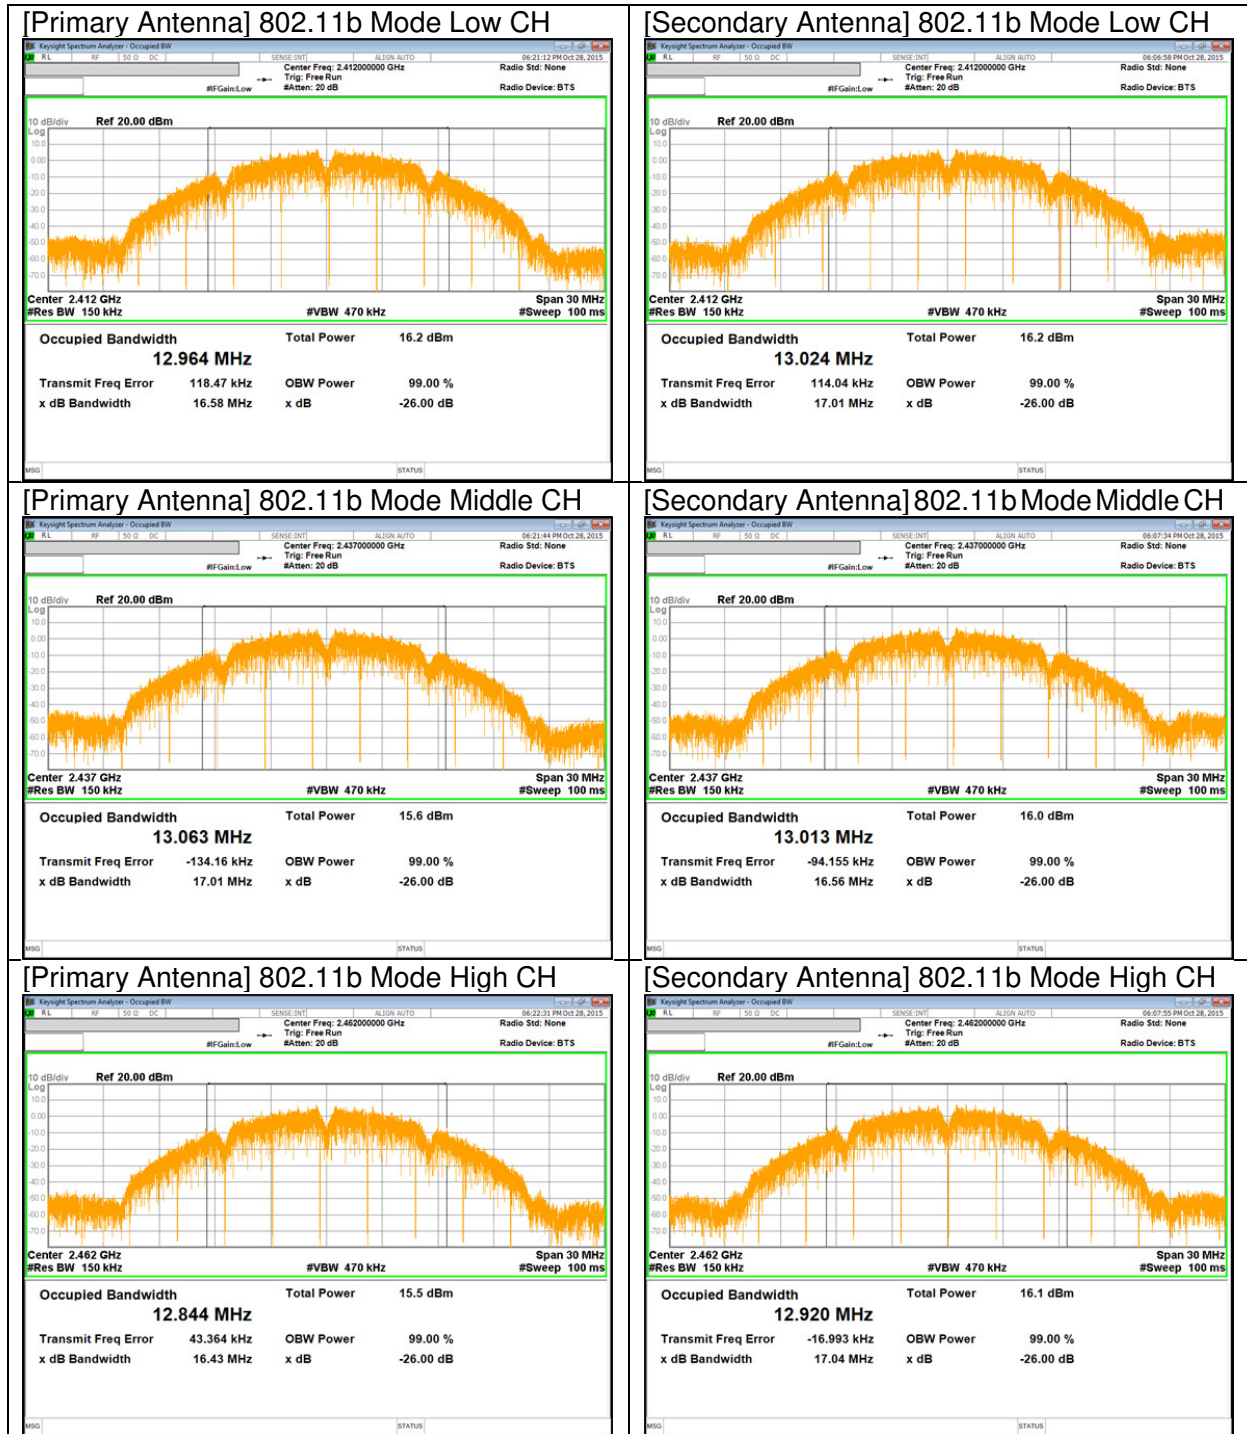


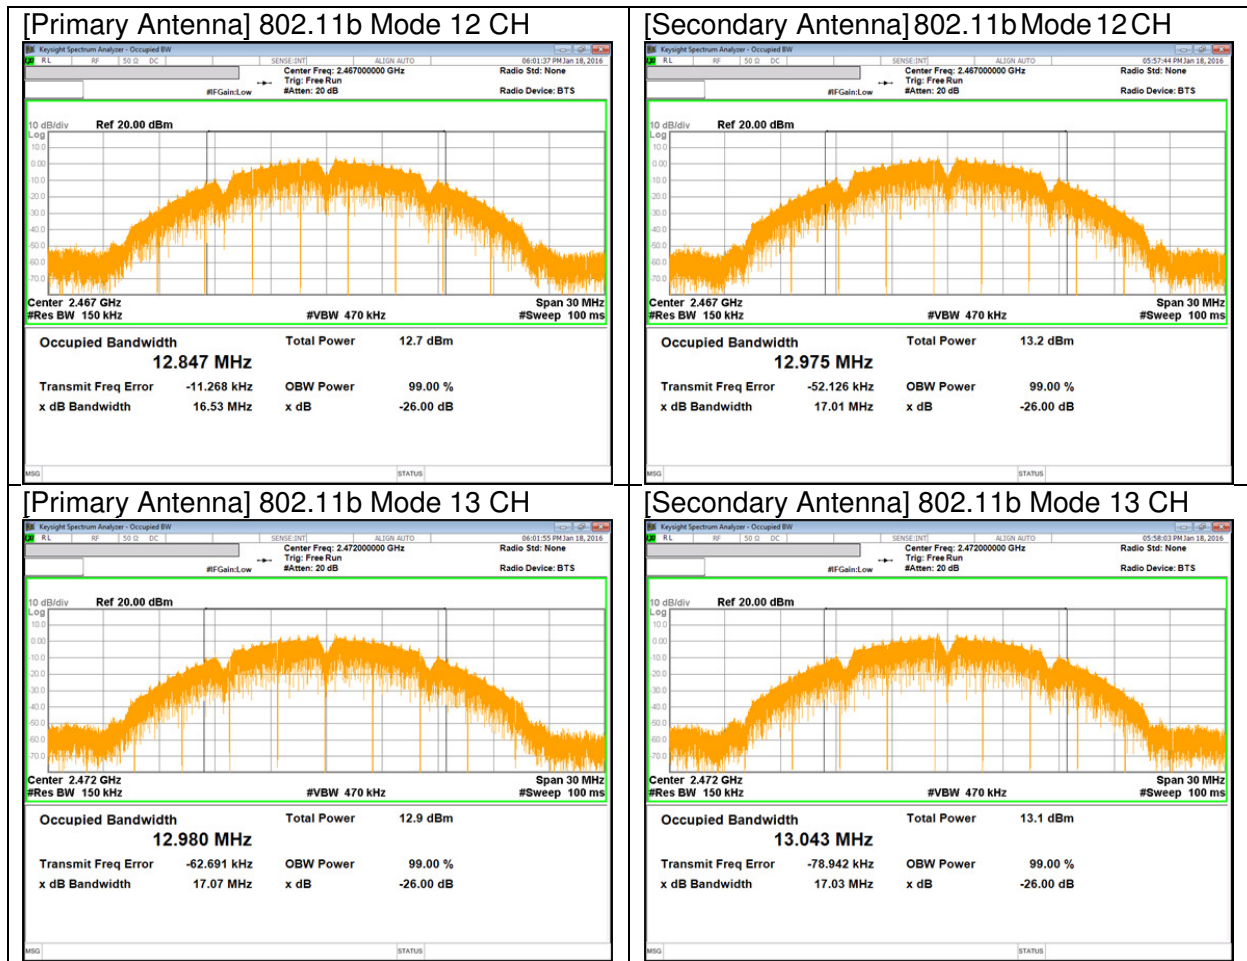

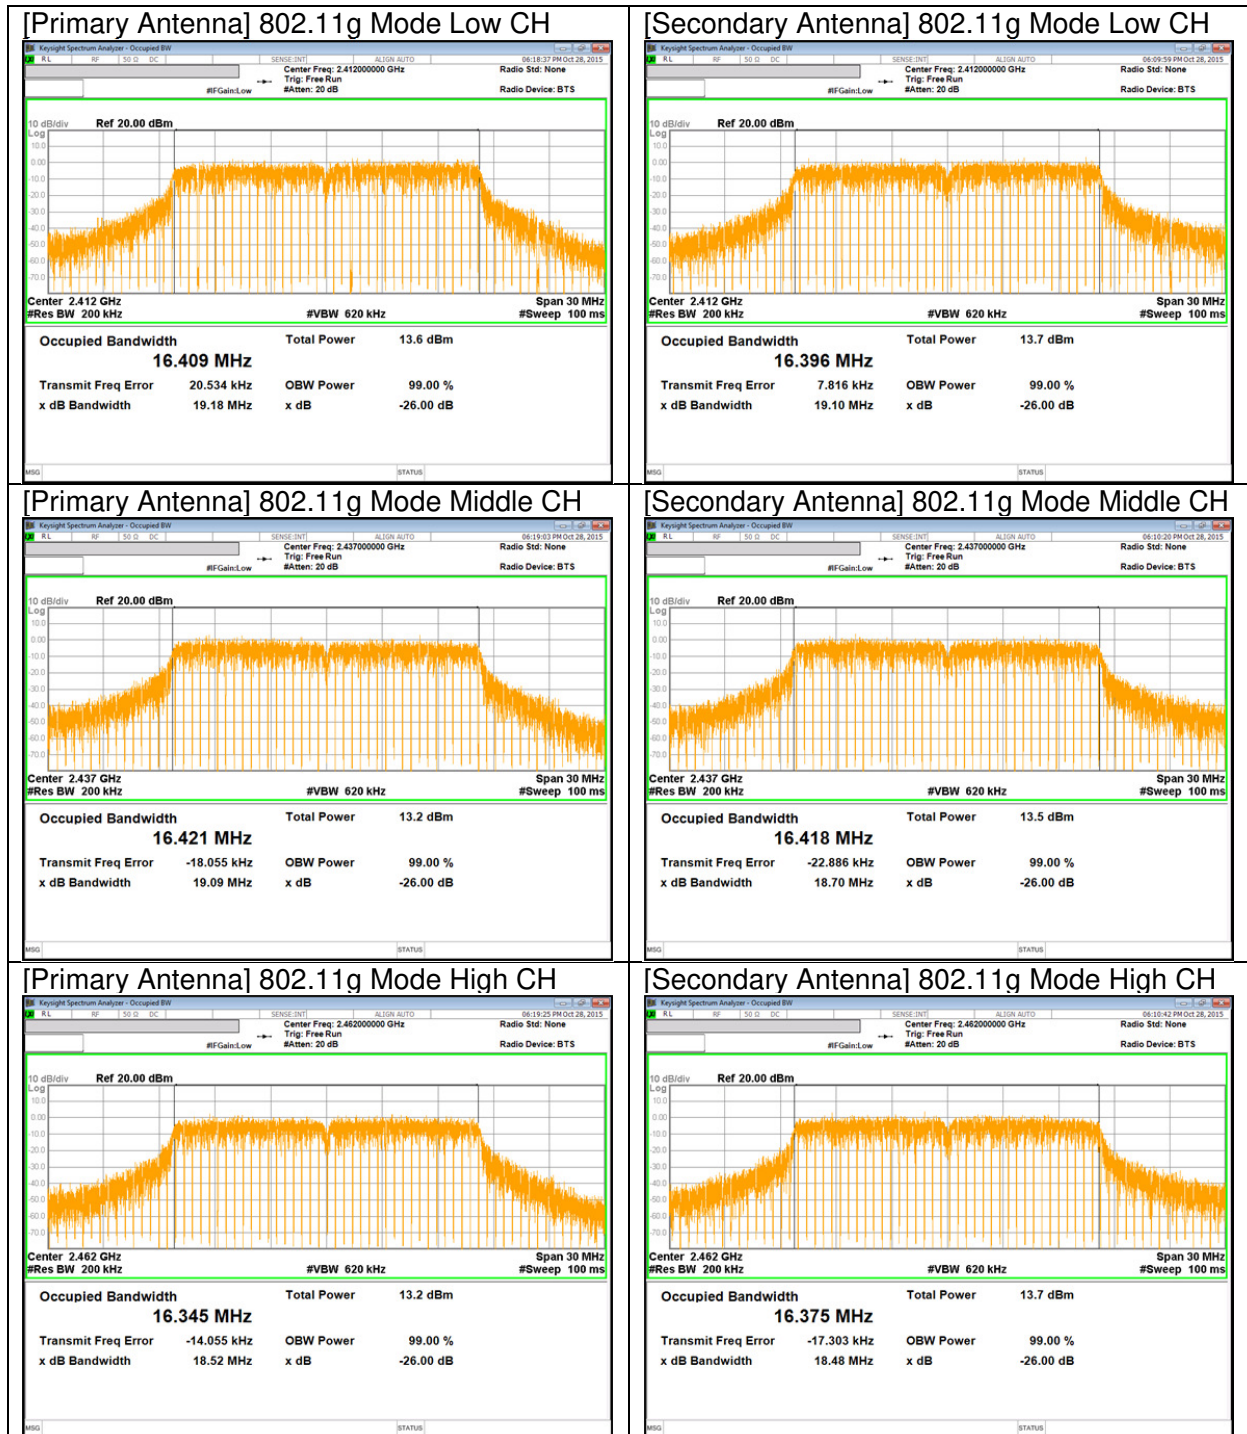

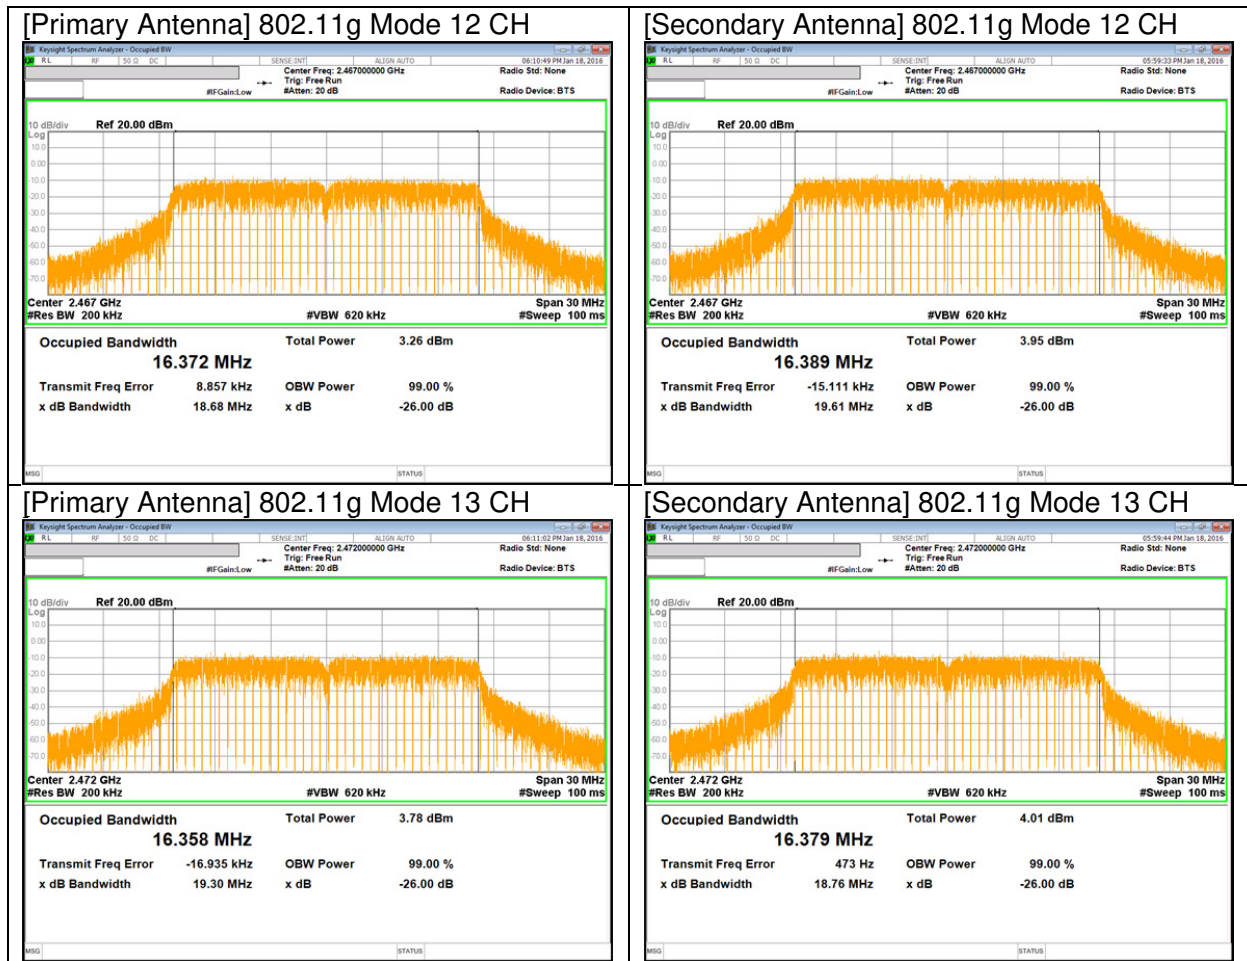

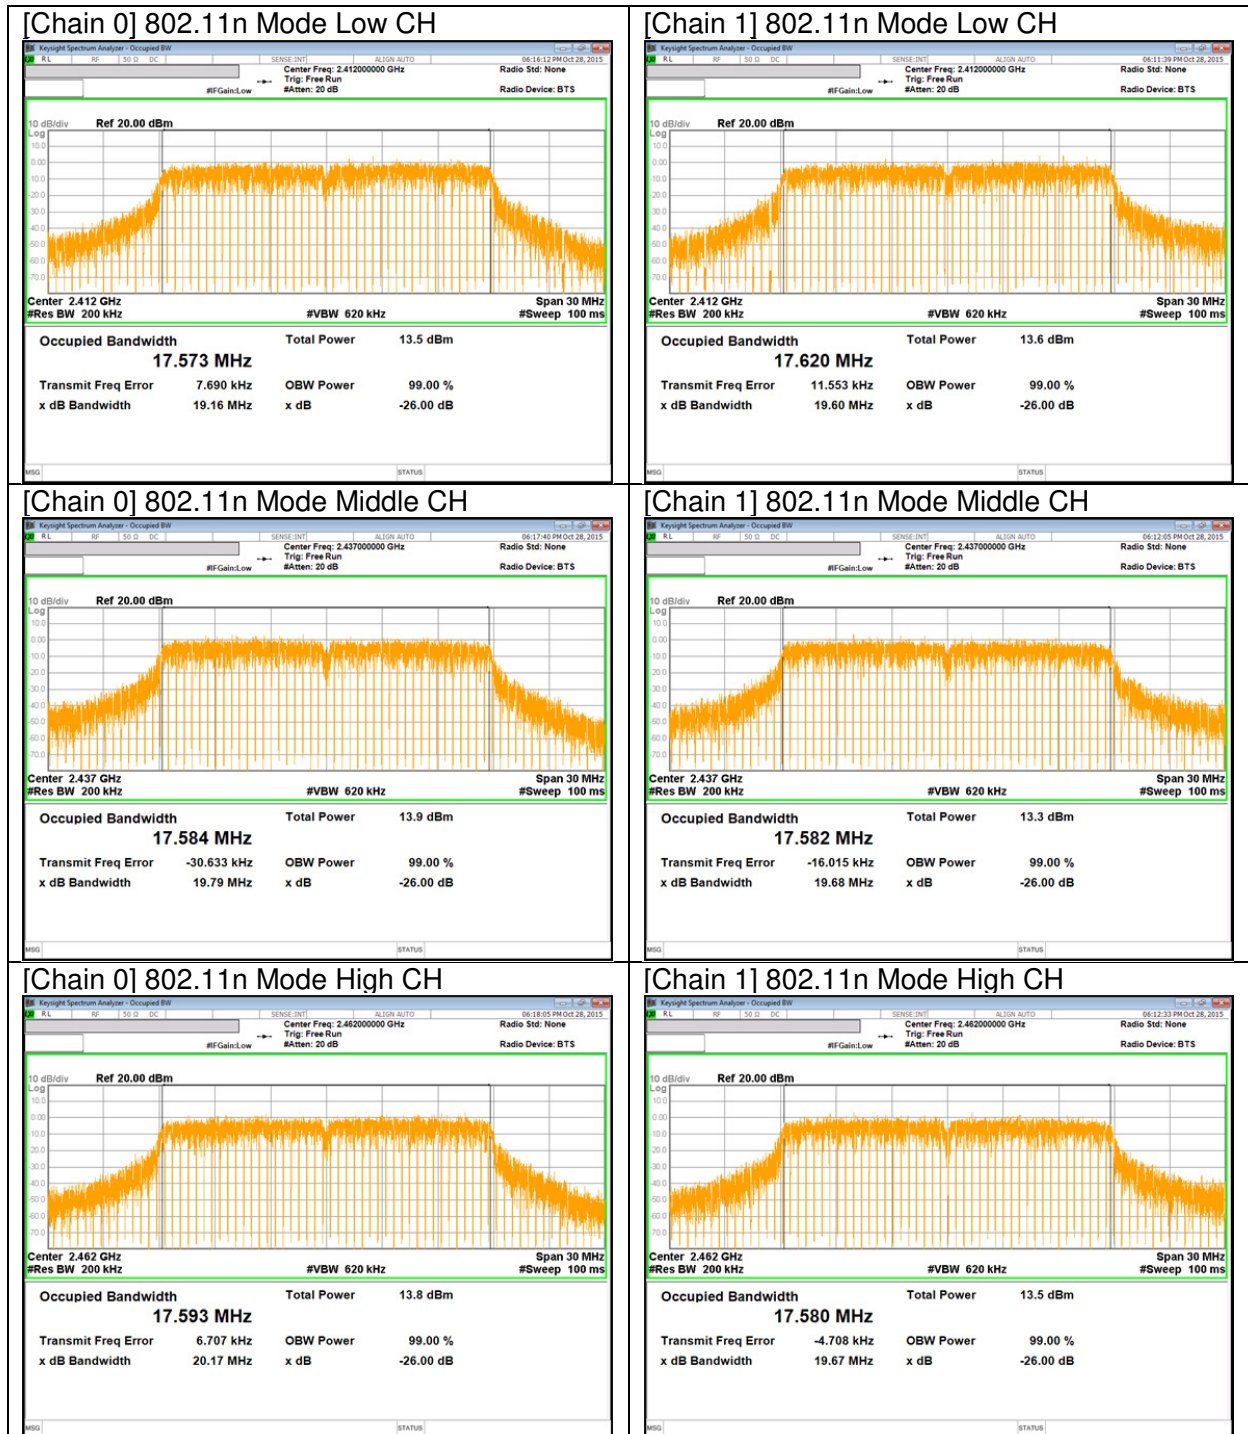

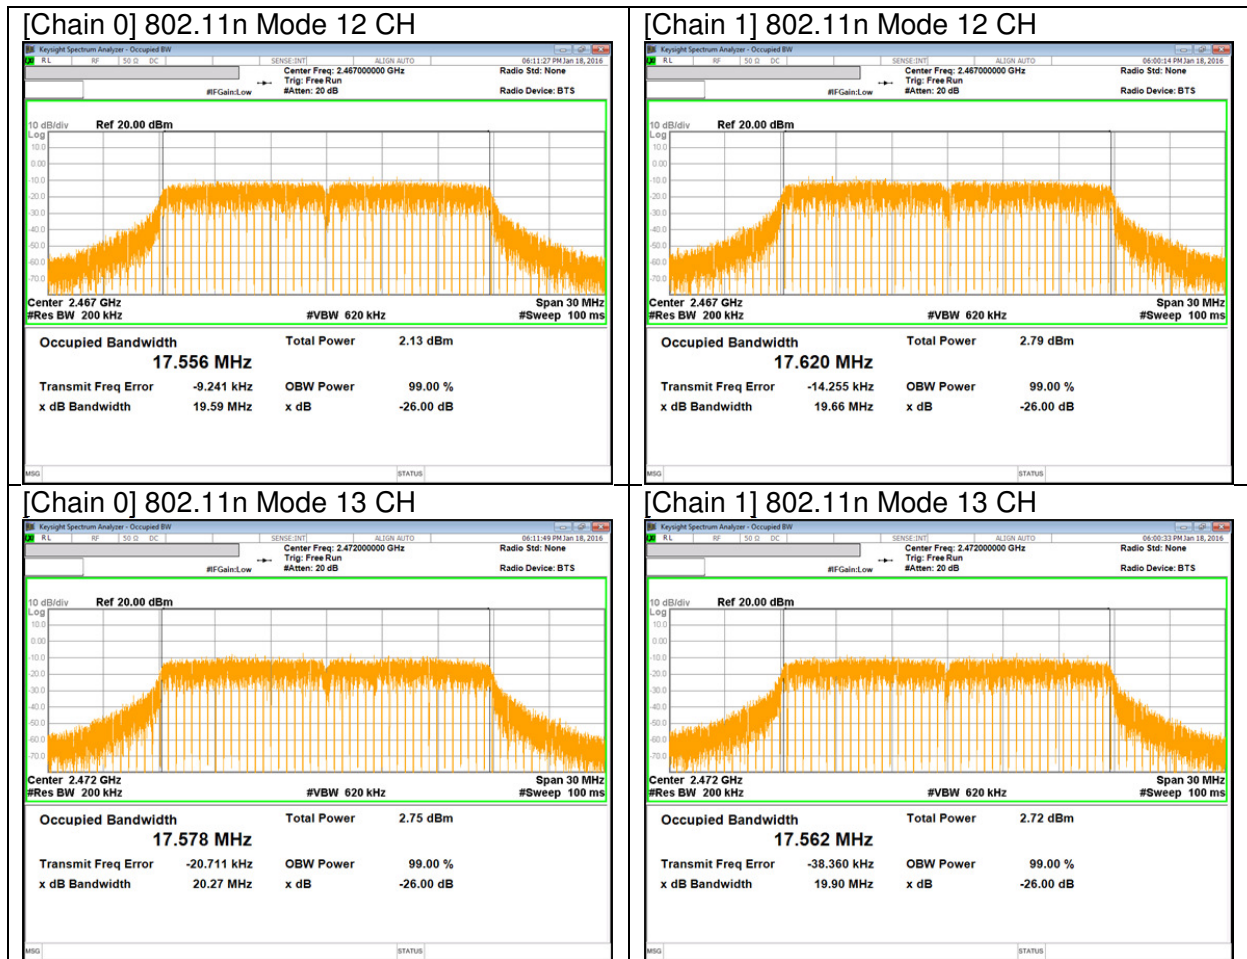

### 10.3. OUTPUT POWER

#### LIMITS

FCC §15.247

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.1 dB (including 10 dB pad and 0.1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### DIRECTIONAL ANTENNA GAIN

For Power: The TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain.

2.4GHz

Chain 0 Antenna Gain [dBi]	Chain 1 Antenna Gain [dBi]	Uncorrelated Chains Directional Gain [dBi]
-1.54	-1.67	-1.60

For PSD: The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

2.4GHz

Chain 0 Antenna Gain [dBi]	Chain 1 Antenna Gain [dBi]	Correlated Chains Directional Gain [dBi]
-1.54	-1.67	1.41

- IEEE 802.11b Mode is not supported MIMO operation. So can't transmit on two antennas as the same time.

**RESULTS**

**10.3.1. 802.11b MODE IN THE 2.4 GHz BAND**

**Limits**

Channel	Frequency [MHz]	Directional Gain Primary [dBi]	Directional Gain Secondary [dBi]	FCC Power Limit [dBm]	IC Power Limit [dBm]	IC EIRP Limit [dBm]	Max Power [dBm]
Low	2412	-1.54	-1.67	30.00	30.00	36.00	30.00
Mid	2437	-1.54	-1.67	30.00	30.00	36.00	30.00
High	2462	-1.54	-1.67	30.00	30.00	36.00	30.00
12	2467	-1.54	-1.67	30.00	30.00	36.00	30.00
13	2472	-1.54	-1.67	30.00	30.00	36.00	30.00

<b>Duty Cycle CF [dB]</b>	0.00	<b>Included in Calculations of Corr'd Power</b>
---------------------------	------	---

**Results**

Channel	Frequency [MHz]	Primary Meas Power [dBm]	Secondary Meas Power [dBm]	Maximum Power [dBm]	Power Limit [dBm]	Margin [dB]
Low	2412	16.31	16.36	16.36	30.00	-13.64
Mid	2437	15.73	16.13	16.13	30.00	-13.87
High	2462	15.67	16.31	16.31	30.00	-13.69
12	2467	12.75	13.25	13.25	30.00	-16.75
13	2472	12.92	13.24	13.24	30.00	-16.76
Worst				16.36		

### 10.3.2. 802.11g MODE IN THE 2.4 GHz BAND

#### Limits

Channel	Frequency [MHz]	Directional Gain Primary [dBi]	Directional Gain Secondary [dBi]	FCC Power Limit [dBm]	IC Power Limit [dBm]	IC EIRP Limit [dBm]	Max Power [dBm]
Low	2412	-1.54	-1.67	30.00	30.00	36.00	30.00
Mid	2437	-1.54	-1.67	30.00	30.00	36.00	30.00
High	2462	-1.54	-1.67	30.00	30.00	36.00	30.00
12	2467	-1.54	-1.67	30.00	30.00	36.00	30.00
13	2472	-1.54	-1.67	30.00	30.00	36.00	30.00

<b>Duty Cycle CF [dB]</b>	0.33	<b>Included in Calculations of Corr'd Power</b>
---------------------------	------	---

#### Results

Channel	Frequency [MHz]	Chain 0 Meas Power [dBm]	Chain 1 Meas Power [dBm]	Maximum Power [dBm]	Power Limit [dBm]	Margin [dB]
Low	2412	14.22	14.28	17.26	30.00	-12.41
Mid	2437	13.72	14.05	16.90	30.00	-12.77
High	2462	13.69	14.29	17.01	30.00	-12.66
12	2467	10.75	11.16	13.97	30.00	-15.70
13	2472	4.13	4.46	7.31	30.00	-22.36
Worst				17.26		

### 10.3.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

#### Limits

Channel	Frequency [MHz]	Directional Gain [dBi]	FCC Power Limit [dBm]	IC Power Limit [dBm]	IC EIRP Limit [dBm]	Max Power [dBm]
Low	2412	-1.60	30.00	30.00	36.00	30.00
Mid	2437	-1.60	30.00	30.00	36.00	30.00
High	2462	-1.60	30.00	30.00	36.00	30.00
12	2467	-1.60	30.00	30.00	36.00	30.00
13	2472	-1.60	30.00	30.00	36.00	30.00

Duty Cycle CF [dB]	0.35	Included in Calculations of Corr'd Power
--------------------	------	--

#### Results

Channel	Frequency [MHz]	Chain 0 Meas Power [dBm]	Chain 1 Meas Power [dBm]	Total Corr'd Power [dBm]	Power Limit [dBm]	Margin [dB]
Low	2412	13.94	13.98	16.97	30.00	-12.68
Mid	2437	14.41	13.72	17.09	30.00	-12.56
High	2462	14.36	14.02	17.20	30.00	-12.45
12	2467	11.48	10.87	14.20	30.00	-15.45
13	2472	3.09	3.35	6.23	30.00	-23.42
Worst				17.20		

## 10.4. PSD

### LIMITS

FCC §15.247

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### TEST PROCEDURE

Power Spectral Density was performed utilizing the "Method AVGPS-2" under KDB558074 D01 DTS Meas Guidance v03r04

### RESULTS

#### 10.4.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	Primary Antenna 1 [dBm]	Secondary Antenna 2 [dBm]	Total PSD [dBm]	Limit [dBm]	Margin [dB]
Low	2412	-9.81	-11.75	-9.81	8.00	-17.81
Mid	2437	-9.12	-9.20	-9.12	8.00	-17.12
High	2462	-10.49	-12.26	-10.49	8.00	-18.49
12	2467	-11.79	-9.23	-9.23	8.00	-17.23
13	2472	-15.71	-12.02	-12.02	8.00	-20.02

<b>Duty Cycle CF [dB]</b>	0.00	<b>Included in Calculations of PPSD</b>
---------------------------	------	---

#### 10.4.2. 802.11g MODE IN THE 2.4 GHz BAND

Channel	Frequency [MHz]	Primary Antenna 1 [dBm]	Secondary Antenna 2 [dBm]	Total PSD [dBm]	Limit [dBm]	Margin [dB]
Low	2412	-18.61	-18.35	-15.14	8.00	-23.14
Mid	2437	-19.46	-19.12	-15.94	8.00	-23.94
High	2462	-19.46	-18.82	-15.79	8.00	-23.79
12	2467	-29.36	-18.78	-18.08	8.00	-26.08
13	2472	-28.98	-24.67	-22.97	8.00	-30.97

<b>Duty Cycle CF [dB]</b>	0.33	<b>Included in Calculations of PPSD</b>
---------------------------	------	---

**10.4.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND**

Channel	Frequency [MHz]	Chain 0 Meas [dBm]	Chain 1 Meas [dBm]	Total PSD [dBm]	Limit [dBm]	Margin [dB]
Low	2412	-19.32	-18.87	-15.73	8.00	-23.73
Mid	2437	-19.13	-19.55	-15.97	8.00	-23.97
High	2462	-19.22	-19.46	-15.98	8.00	-23.98
12	2467	-31.07	-19.61	-18.96	8.00	-26.96
13	2472	-30.59	-26.37	-24.63	8.00	-32.63

<b>Duty Cycle CF [dB]</b>	0.35	<b>Included in Calculations of PPSD</b>
---------------------------	------	---

10.4.4. PSD PLOTS

