

CERTIFICATION TEST REPORT

Report Number. : 4790841159-E5V2

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-X510

FCC ID : A3LSMX510

IC : 649E-SMX510

EUT Description : BT/BLE Tablet + DTS/UNII a/b/g/n/ac/ax and Digitizer

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-GEN Issue 5

Date Of Issue:
2023-08-01

Prepared by:
UL KOREA LTD.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL KOREA LTD. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2023-07-19	Initial issue	Dexter(Hyunsik) Yun
V2	2023-08-01	Updated to address TCB's question	Dexter(Hyunsik) Yun

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
1.1. INTRODUCTION OF TEST DATA DEVIATION	5
1.2. DIFFERENCE	5
1.3. SPOT CHECK VERIFICATION DATA.....	5
1.4. REFERENCE DETAIL.....	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION.....	7
4.2. SAMPLE CALCULATION.....	7
4.3. MEASUREMENT UNCERTAINTY	7
4.4. DECISION RULE	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT.....	8
5.2. MAXIMUM E-FIELD STRENGTH.....	8
5.3. PRELIMINARY TEST CONFIGURATIONS.....	8
5.4. WORST-CASE CONFIGURATION AND MODE	8
5.5. MODIFICATIONS.....	9
5.6. DESCRIPTION OF TEST SETUP	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. TEST RESULTS SUMMARY	12
8. 99% BANDWIDTH	13
9. APPLICABLE LIMITS AND TEST RESULTS	14
9.1. RADIATED EMISSIONS	14
9.1. AC MAINS LINE CONDUCTED EMISSIONS.....	17
10. SPOT-CHECK TEST RESULT	20

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: BT/BLE Tablet + DTS/UNII a/b/g/n/ac/ax and Digitizer
MODEL NUMBER: SM-X510
SERIAL NUMBER: 74b2c4c8e3397ece (RADIATED, Original);
74ab471810397ece (RADIATED, Spot-check);
DATE TESTED: 2023-07-10 ~ 2023-07-18(Original);
2023-07-14 ~ 2023-07-19(Spot-check);

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies
INDUSTRY CANADA RSS-GEN Issue 5	Complies

UL KOREA LTD. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL KOREA LTD. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL KOREA LTD. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL KOREA LTD. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL KOREA LTD. By:



Seokhwan Hong
Suwon Lab Engineer
UL KOREA LTD.

Tested By:



Dexter(Hyunsik) Yun
Suwon Lab Engineer
UL KOREA LTD.

1.1. INTRODUCTION OF TEST DATA DEVIATION

This report referenced from the FCC ID: A3LSMX516B DCD Digitizer (FCC CFR 47 Part 15C). And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

1.2. DIFFERENCE

Except for removing WWAN RF components, The SM-X510(IC: 649E-SMX510) model shares the same enclosure and circuit board as SM-X516B.

The Digitizer and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary radiated emissions that the performance of the SM-X510 (IC: 649E-SMX510) remains representative of SM-X516B. The test data of SM-X516B being submitted for this application to cover Digitizer features.

1.3. SPOT CHECK VERIFICATION DATA

(Worst case of the radiated fundamental and radiated spurious emissions)

Band	Test Item	Mode	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
					SM-X516B Results	SM-X510 Results		
					FCC ID : A3LSMX516B	FCC ID : A3LSMX510		
Digitizer	FUND	Digitizer_Y11_Adapter	656 kHz	31.27 dBuV/m	6.41 dBuV/m	6.14 dBuV/m	-0.27 dB	Quasi-peak
	RSE	Digitizer_Y11_Adapter	656 kHz	23.57 dBuV/m	0.79 dBuV/m	-0.02 dBuV/m	-0.81 dB	Quasi-peak

Comparison of two models, upper deviation is within 3 dB range and all test results are under FCC Technical Limits.

1.4. REFERENCE DETAIL

Reference application that contains the reused reference data in the individual test reports:

Equipment Class	Reference FCC ID (Parent)	Application Type	Reference Test report number	Exhibit Type	Variant Test Report Number	Data Re-used
DTS	A3LSMX516B	Original Grant	4790841155-E5 (802.11b/g/n/ax)	Test Report	4790841159-E1 (802.11b/g/n/ax)	Partial Note1
DSS	A3LSMX516B	Original Grant	4790841155-E7 (Bluetooth)	Test Report	4790841159-E3 (Bluetooth)	All
NII	A3LSMX516B	Original Grant	4790841155-E8 (802.11a/n/ac/ax)	Test Report	4790841159-E4 (802.11a/n/ac/ax)	Partial Note2
DCD	A3LSMX516B	Original Grant	4790841155-E9 (Digitizer)	Test Report	4790841159-E5 (Digitizer)	All

Note1. 802.11b & 802.11n HT20 mode with changed target power was fully tested.

Note2. DFS was fully tested.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. ANSI C63.10-2013.
4. KDB 680106 D01 RF Exposure Wireless Charging Apps v03.
5. KDB 484596 D01 Referencing Test Data v01
6. IC RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1(3m semi-anechoic chamber)
<input checked="" type="checkbox"/>	Chamber 2(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 3(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 4(3m Full-anechoic chamber)
<input type="checkbox"/>	Chamber 5(3m Full-anechoic chamber)

Used ISED Test Site Reg.(company number): 2324L
CAB Identifier: KR0161

UL KOREA LTD. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

$$\begin{aligned} \text{Corrected Reading (dBuV)} &= \text{Meter Reading (dBuV)} + \text{External Cable (dB)} + \\ &\text{Cableloss (dB)} \\ 46.62 \text{ dBuV} + 9.8 \text{ dB} + 0.1 \text{ dB} &= 56.52 \text{ dBuV} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.80 dB
Radiated Disturbance, 9 kHz to 30 MHz	1.69 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.92 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 2, Clause 4.4.3 in IEC Guide 115:2021.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a BT/BLE Tablet + DTS/UNII a/b/g/n/ac/ax and Digitizer.
 This test report addresses the digitizer(DCD) operational mode.

5.2. MAXIMUM E-FIELD STRENGTH

- Mode 1

Fundamental Frequency (kHz)	Test Case	E-Field (30m distance) FCC (dBuV/m)
531 ~ 656	2	6.41

Test was performed at the worst margin among the fundamental output levels(531, 562, 593, 656 kHz).

5.3. PRELIMINARY TEST CONFIGURATIONS

Worst case of antenna axis: Y

5.4. WORST-CASE CONFIGURATION AND MODE

Mode 1	Test Case	Description
Digitizer	1	Display Scan(without TA)
	2	Display Scan(with TA)

During radiated test for test case 1, the EUT didn't connected AC adapter, but for AC line conducted test for all test case was performed with connected with AC adapter.

For Digitizer mode, test results of case 2 is worst, so this test report described test case 2.

5.5. MODIFICATIONS

No modifications were made during testing.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT & PERIPHERALS

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37M9KN2LV2DK3	N/A
Data Cable	SAMSUNG	EP-DN980	GH39-02115A	N/A

I/O CABLES

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A


TEST SETUP

The EUT is installed in a typical configuration. Charging from EUT.

TEST SETUP DIAGRAM

NOTE : Test case 1, EUT did not connected with Travel adapter(AC Main) in below set-up diagram for radiated test.

- Test case 1 and 2 : Digitizer

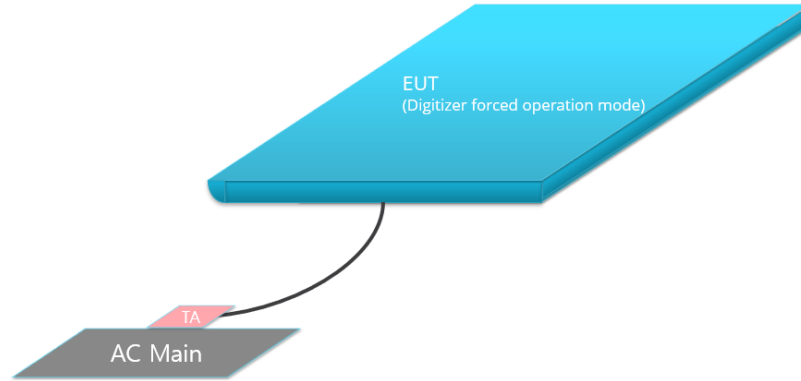

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	2024-08-15
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	2024-08-15
Preamplifier, 1000 MHz	Sonoma	310N	341282	2023-08-02
Preamplifier, 1000 MHz	Sonoma	310N	351741	2023-08-02
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2023-07-29
EMI Test Receive, 3 GHz	R&S	ESR3	101832	2023-08-01
Spectrum Analyzer, 7 GHz	Agilent / HP	N9010A	MY54200580	2023-08-01
LISN	R&S	ENV-216	101837	2023-08-04
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2023-10-06
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. TEST RESULTS SUMMARY

FCC Part Section	IC Section	Test Description	Test Limit	Test Condition	Test Result
2.1049	RSS-GEN 6.7	Occupied Bandwidth(99%)	N/A	Radiated	Complies
15.209	RSS-GEN Clause 8.9, 8.10	Radiated Spurious Emission	Section 9	Radiated	Complies
15.207(a)	RSS-GEN Clause 8.8	AC Power Line conducted emissions	Section 11	Power Line conducted	Complies

For ISED, updated 99% Bandwidth data.

8. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE

- 99% Bandwidth
 RBW: 1 ~ 5% of 99% Bandwidth, VBW >= 3 x RBW, sample detector.

RESULTS

Test Mode	Frequency [kHz]	99% Bandwidth [kHz]
Digitizer	656.24	2.610

TEST PLOTS(99% Bandwidth)

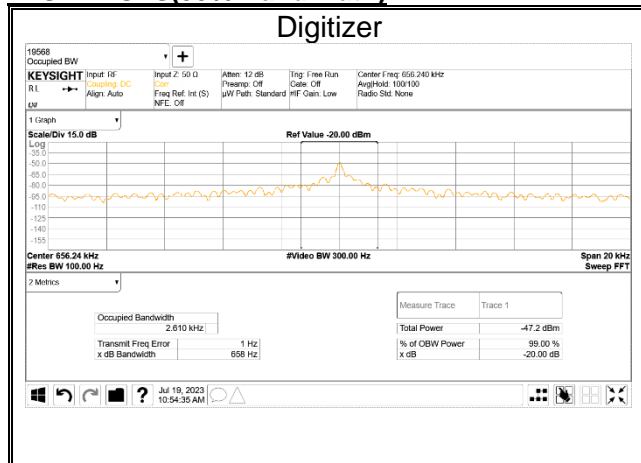

9. APPLICABLE LIMITS AND TEST RESULTS

9.1. RADIATED EMISSIONS

TEST PROCEDURE

ANSI C63.10: 2013

The highest clock frequency generated or used in the EUT is 656 kHz therefore the frequency range was investigated from 9 kHz to 30 MHz.

LIMIT

FCC §15.209 (a)

Frequency (MHz)	E-Field Strength (mV/meter)	Measurement Distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30	30
30–88	100	3
88 to 216	150	3
216 to 960	200	3
Above 960 MHz	500	3

Note: The lower limit shall apply at the transition frequency.

IC RSS-GEN Sections 8.9 and 8.10.

Frequency (MHz)	H-Field Strength (mA/meter)	Measurement Distance (m)
0.009–0.490	6.37/F(kHz)	300
0.490–1.705	63.7/F(kHz)	30
1.705–30.0	0.08	30

Sample calculation (FCC Part 15.209 verse IC RSS-GEN 8.9)
 FCC and IC limit are similar, so FCC measurement data meets IC limit.

Standard \ Range	0.009 ~ 0.490	0.490 ~ 1.705	1.705 ~ 30.0
FCC(E-field)	48.52 ~ 13.80	33.80 ~ 22.97	29.54
IC(H-field)	-3.00 ~ -37.72	-17.72 ~ -28.55	-21.94
IC(H-field to E-field)^{Note1}	48.50 ~ 13.78	33.78 ~ 22.95	29.56


Note1. $\text{dB}\mu\text{A/m} + 51.5 = \text{dB}\mu\text{V/m}$

RESULTS

The EUT belongs to Test Case 2.

Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 300 m open field test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788 D01.

FUNDAMENTAL EMISSIONS 9 KHz to 30 MHz(Digitizer mode Test Case 2)

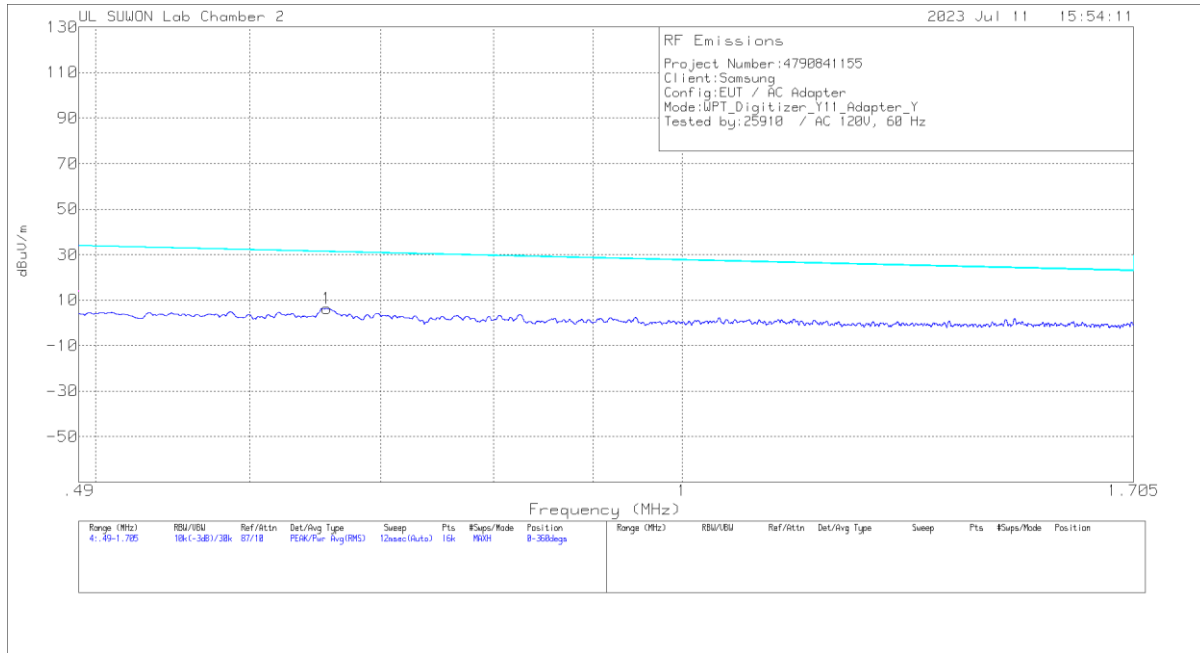


TEST DATA

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)
1	.65686	26.31	Pk	20	.1	-40	6.41	31.26	-24.85

RADIATED EMISSIONS 9 KHz to 30 MHz(Digitizer mode Test Case 2)

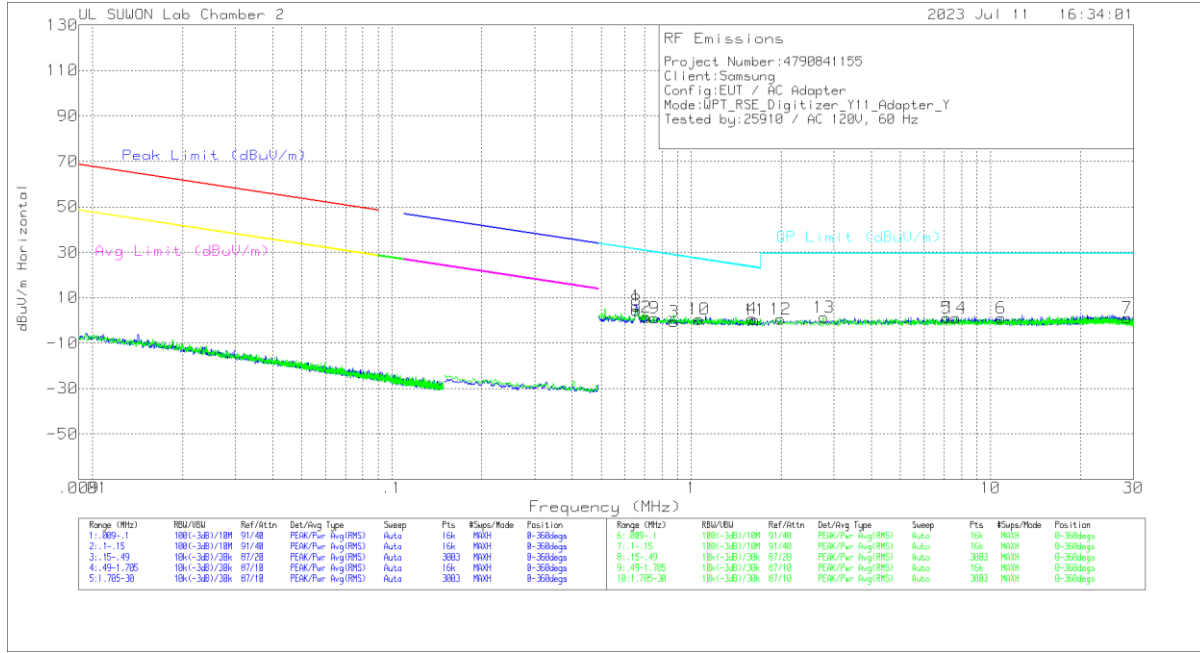

TEST DATA

Trace Markers

[Face On]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
**1	.65602	26.29	Pk	20	.1	-40	6.39	31.27	-24.88	0-360
2	.70827	21.18	Pk	20	.1	-40	1.28	30.61	-29.33	0-360
3	.87597	19.25	Pk	20	.2	-40	-5.5	28.77	-29.32	0-360
4	1.59698	20.49	Pk	20.1	.2	-40	.79	23.57	-22.78	0-360
5	7.12438	20.59	Pk	20.2	.4	-40	1.19	29.5	-28.31	0-360
6	10.84725	20.46	Pk	20.2	.5	-40	1.16	29.5	-28.34	0-360
7	28.63223	20.59	Pk	19.8	.8	-40	1.19	29.5	-28.31	0-360

[Face Off]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
**8	.65709	24.25	Pk	20	.1	-40	4.35	31.26	-26.91	0-360
9	.75387	20.98	Pk	20	.2	-40	1.18	30.07	-28.89	0-360
10	1.06141	20.39	Pk	20	.2	-40	.59	27.11	-26.52	0-360
11	1.63475	20.02	Pk	20.1	.2	-40	.32	23.36	-23.04	0-360
12	1.98775	20.25	Pk	20.1	.2	-40	.55	29.5	-28.95	0-360
13	2.77003	20.86	Pk	20.2	.3	-40	1.36	29.5	-28.14	0-360
14	7.65689	20.62	Pk	20.2	.4	-40	1.22	29.5	-28.28	0-360

Pk - Peak detector

** Fundamental

Note : Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

9.1. AC MAINS LINE CONDUCTED EMISSIONS

TEST PROCEDURE

ANSI C63.10: 2013

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

LIMIT

FCC §15.207 (a)

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.


RESULTS

The EUT belongs to Test Case 2.

WORST EMISSIONS (Digitizer mode Test Case 2)

Line-L1 .15 - 30MHz

LINE 1 RESULTS

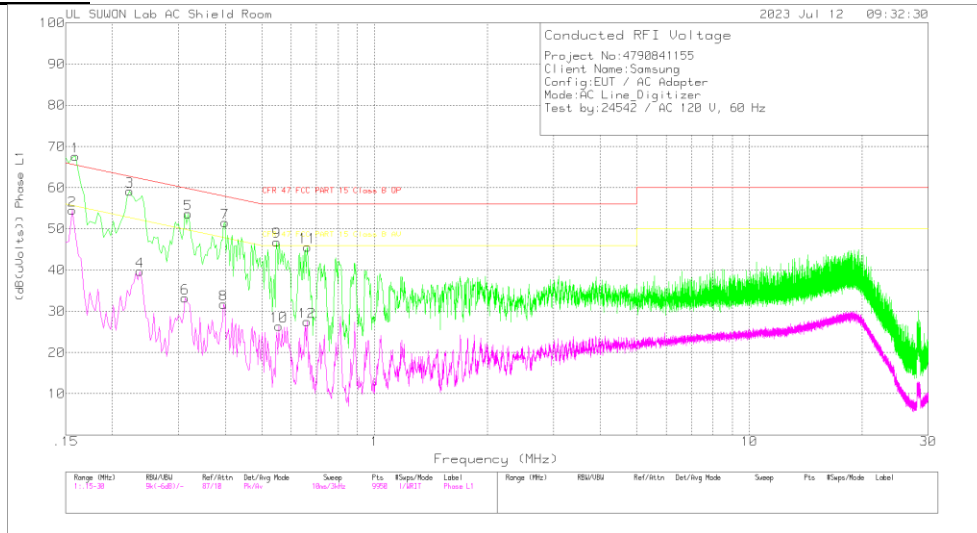

Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_AU TO_With EX_L1[dB]	CABLELOS S[dB]	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.159	58.06	Pk	9.5	.1	67.66	65.52	2.14	-	-
2	.156	44.96	Av	9.5	.1	54.56	-	-	55.67	-1.11
3	.222	49.43	Pk	9.5	.2	59.13	62.74	-3.61	-	-
4	.237	30	Av	9.5	.2	39.7	-	-	52.2	-12.5
5	.318	44.01	Pk	9.5	.2	53.71	59.76	-6.05	-	-
6	.312	23.58	Av	9.5	.2	33.28	-	-	49.92	-16.64
7	.399	41.9	Pk	9.5	.2	51.6	57.87	-6.27	-	-
8	.396	22.05	Av	9.5	.2	31.75	-	-	47.94	-16.19
9	.549	37.08	Pk	9.6	.2	46.88	56	-9.12	-	-
10	.555	16.64	Av	9.6	.2	26.44	-	-	46	-19.56
11	.663	35.83	Pk	9.6	.2	45.63	56	-10.37	-	-
12	.66	17.74	Av	9.6	.2	27.54	-	-	46	-18.46

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions


Range 1: Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_AU O_With EX_L1[dB]	CABLELOS S[dB]	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.15825	46.53	Qp	9.5	.1	56.13	65.56	-9.43	-	-
.15525	46.38	Qp	9.5	.1	55.98	65.71	-9.73	-	-
.22215	32.21	Qp	9.5	.2	41.91	62.74	-20.83	-	-
.31875	33.99	Qp	9.5	.2	43.69	59.74	-16.05	-	-
.39825	30.68	Qp	9.5	.2	40.38	57.89	-17.51	-	-
.54915	26.16	Qp	9.6	.2	35.96	56	-20.04	-	-

Qp - Quasi-Peak detector

Line-L2 .15 - 30MHz

LINE 2 RESULTS

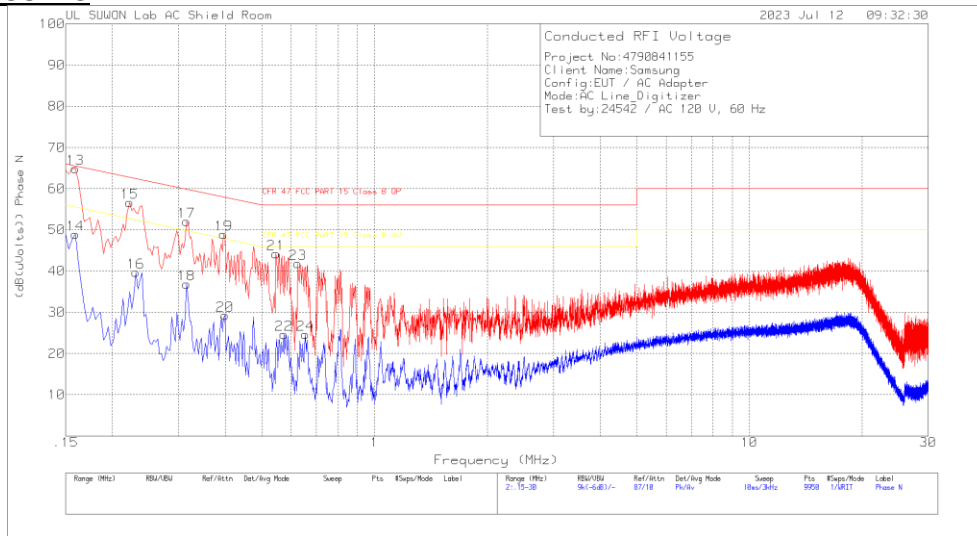

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_AU TO_With EX_N[dB]	CABLELOS S[dB]	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.159	55.33	Pk	9.5	.1	64.93	65.52	-5.9	-	-
14	.159	39.3	Av	9.5	.1	48.9	-	-	55.52	-6.62
15	.222	46.98	Pk	9.5	.2	56.68	62.74	-6.06	-	-
16	.231	29.96	Av	9.5	.2	39.66	-	-	52.41	-12.75
17	.315	42.33	Pk	9.5	.2	52.03	59.84	-7.81	-	-
18	.315	27.18	Av	9.5	.2	36.88	-	-	49.84	-12.96
19	.396	39.21	Pk	9.5	.2	48.91	57.94	-9.03	-	-
20	.399	19.53	Av	9.5	.2	29.23	-	-	47.87	-18.64
21	.546	34.38	Pk	9.6	.2	44.18	56	-11.82	-	-
22	.573	14.79	Av	9.6	.2	24.59	-	-	46	-21.41
23	.624	31.98	Pk	9.6	.2	41.78	56	-14.22	-	-
24	.654	14.87	Av	9.6	.2	24.67	-	-	46	-21.33

Pk - Peak detector
 Av - Average detection

Quasi-Peak Emissions


Range 2: Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_AU O_With EX_N[dB]	CABLELOS S[dB]	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.15915	45.63	Qp	9.5	.1	55.23	65.51	-10.28	-	-
.15915	45.49	Qp	9.5	.1	55.09	65.51	-10.42	-	-
.22125	32	Qp	9.5	.2	41.7	62.77	-21.07	-	-
.31575	31.89	Qp	9.5	.2	41.59	59.82	-18.23	-	-
.36975	25.48	Qp	9.5	.2	35.18	58.51	-23.33	-	-

Qp - Quasi-Peak detector

10. SPOT-CHECK TEST RESULT

FUNDAMENTAL (WORST CASE: 656 kHz)

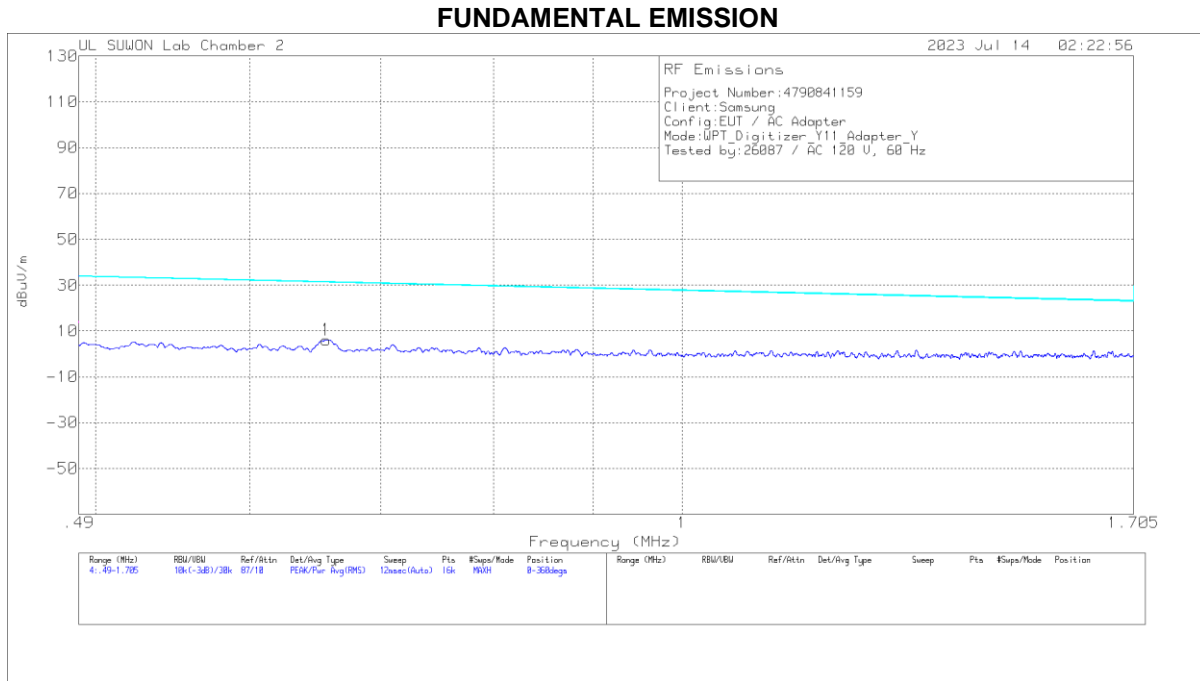


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.6564	26.04	Pk	20	.1	-40	6.14	31.27	-25.13	0-360

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS(WORST CASE: 656 kHz)

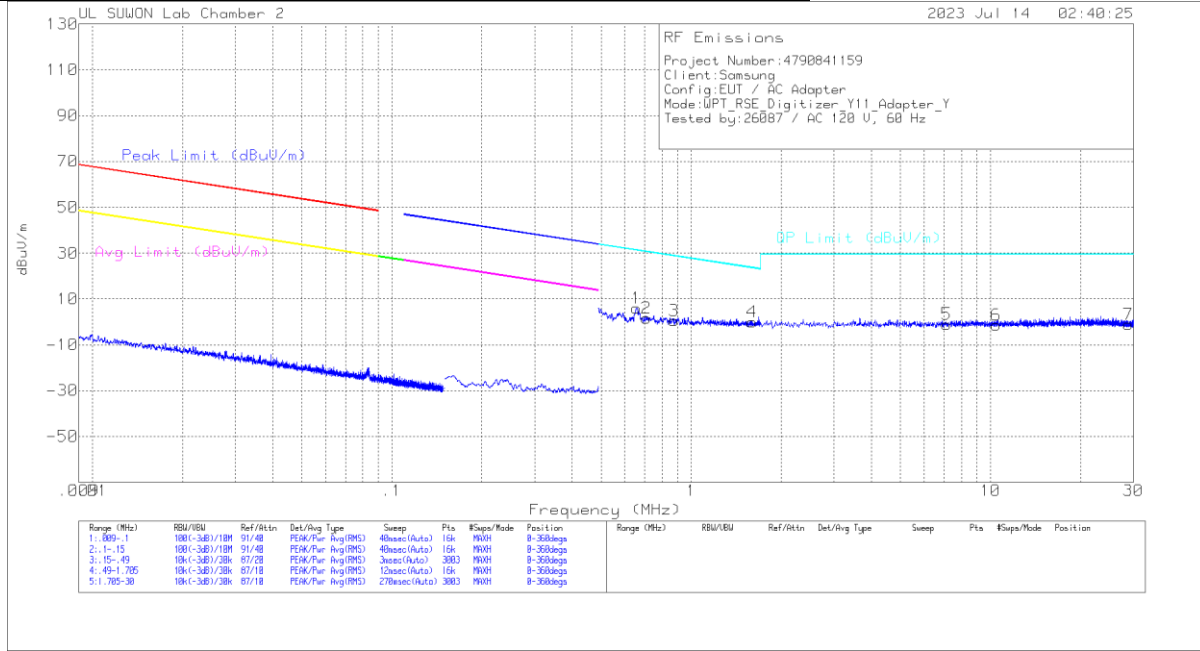

Radiated Emissions

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
**1	.65686	26.03	Pk	20	.1	-40	6.13	31.26	-25.13	0-360
2	.70827	21.62	Pk	20	.1	-40	1.72	30.61	-28.89	0-360
3	.87593	20.28	Pk	20	.2	-40	.48	28.77	-28.29	0-360
4	1.59694	19.68	Pk	20.1	.2	-40	-.02	23.57	-23.59	0-360
5	7.14323	18.43	Pk	20.2	.4	-40	-.97	29.5	-30.47	0-360
6	10.44198	17.91	Pk	20.2	.5	-40	-1.39	29.5	-30.89	0-360
7	28.85843	18.4	Pk	19.7	.8	-40	-1.1	29.5	-30.6	0-360

Pk - Peak detector
 ** Fundamental

END OF TEST REPORT