

TEST REPORT

FCC LTE B2 Test for SM-X526B
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2502-FC037

DATE OF ISSUE
February 17, 2025

Tested by
Jae Ryang Do



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2502-FC037

DATE OF ISSUE

February 17, 2025

Applicant**SAMSUNG Electronics Co., Ltd.**

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name

Tablet

Model Name

SM-X526B

Date of Test

December 26, 2024 ~ February 12, 2025

FCC ID

A3LSMX526B

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

FCC Classification:

PCS Licensed Transmitter (PCB)

FCC Rule Part(s):

§ 24

Test Results

PASS

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	February 17, 2025	Initial Release

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. GENERAL INFORMATION.....	5
1.1. MAXIMUM OUTPUT POWER.....	6
2. INTRODUCTION.....	8
2.1. DESCRIPTION OF EUT.....	8
2.2. MEASURING INSTRUMENT CALIBRATION	8
2.3. TEST FACILITY.....	8
3. DESCRIPTION OF TESTS	9
3.1 TEST PROCEDURE	9
3.2 RADIATED POWER.....	10
3.3 RADIATED SPURIOUS EMISSIONS	11
3.4 PEAK- TO- AVERAGE RATIO	12
3.5 OCCUPIED BANDWIDTH.....	14
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	15
3.7 BAND EDGE.....	16
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	18
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	19
3.9 WORST CASE(RADIATED TEST)	20
3.10 WORST CASE(CONDUCTED TEST)	21
4. LIST OF TEST EQUIPMENT	22
5. MEASUREMENT UNCERTAINTY	23
6. SUMMARY OF TEST RESULTS	24
7. SAMPLE CALCULATION	25
8. TEST DATA(Main 1 ANT).....	27
8.1 EQUIVALENT ISOTROPIC RADIATED POWER	27
8.2 RADIATED SPURIOUS EMISSIONS	30
8.3 PEAK-TO-AVERAGE RATIO	31
8.4 OCCUPIED BANDWIDTH.....	32
8.5 CONDUCTED SPURIOUS EMISSIONS.....	33
8.6 BAND EDGE.....	33
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	34
9. TEST DATA(Sub 1 ANT)	52
9.1 EQUIVALENT ISOTROPIC RADIATED POWER	52
9.2 RADIATED SPURIOUS EMISSIONS	55
9.3 PEAK-TO-AVERAGE RATIO	56
9.4 OCCUPIED BANDWIDTH.....	57
9.5 CONDUCTED SPURIOUS EMISSIONS.....	58
9.6 BAND EDGE.....	58
9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	59
10. TEST PLOTS(Main 1 ANT).....	77
11. TEST PLOTS(Sub 1 ANT)	198
12. ANNEX A_ TEST SETUP PHOTO.....	319

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMX526B
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§ 24
EUT Type:	Tablet
Model(s):	SM-X526B
Tx Frequency:	1850.7 MHz – 1909.3 MHz (LTE – Band2 (1.4 MHz)) 1851.5 MHz – 1908.5 MHz (LTE – Band2 (3 MHz)) 1852.5 MHz – 1907.5 MHz (LTE – Band2 (5 MHz)) 1855.0 MHz – 1905.0 MHz (LTE – Band2 (10 MHz)) 1857.5 MHz – 1902.5 MHz (LTE – Band2 (15 MHz)) 1860.0 MHz – 1900.0 MHz (LTE – Band2 (20 MHz))
Date(s) of Tests:	December 26, 2024 ~ February 12, 2025
Serial number:	Radiated : R32XC00B7ZP Conducted : R32XC00AZFB

1.1. MAXIMUM OUTPUT POWER

Main 1 ANT

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band2 (1.4)	1850.7 - 1909.3	1M10G7D	QPSK	0.234	23.69
		1M10W7D	16QAM	0.199	22.98
		1M10W7D	64QAM	0.153	21.85
		1M10W7D	256QAM	0.074	18.72
LTE – Band2 (3)	1851.5 - 1908.5	2M72G7D	QPSK	0.238	23.77
		2M70W7D	16QAM	0.200	23.02
		2M70W7D	64QAM	0.154	21.88
		2M72W7D	256QAM	0.075	18.75
LTE – Band2 (5)	1852.5 - 1907.5	4M53G7D	QPSK	0.246	23.91
		4M51W7D	16QAM	0.207	23.16
		4M52W7D	64QAM	0.156	21.93
		4M53W7D	256QAM	0.076	18.79
LTE – Band2 (10)	1855.0 - 1905.0	9M00G7D	QPSK	0.252	24.01
		9M01W7D	16QAM	0.209	23.21
		9M00W7D	64QAM	0.162	22.10
		9M01W7D	256QAM	0.081	19.06
LTE – Band2 (15)	1857.5 - 1902.5	13M5G7D	QPSK	0.256	24.08
		13M5W7D	16QAM	0.213	23.28
		13M5W7D	64QAM	0.164	22.14
		13M5W7D	256QAM	0.081	19.07
LTE – Band2 (20)	1860.0 - 1900.0	18M0G7D	QPSK	0.250	23.98
		17M9W7D	16QAM	0.210	23.22
		17M9W7D	64QAM	0.162	22.10
		17M9W7D	256QAM	0.080	19.02

Sub 1 ANT

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band2 (1.4)	1850.7 - 1909.3	1M10G7D	QPSK	0.104	20.15
		1M10W7D	16QAM	0.089	19.50
		1M10W7D	64QAM	0.069	18.37
		1M09W7D	256QAM	0.033	15.23
LTE – Band2 (3)	1851.5 - 1908.5	2M72G7D	QPSK	0.106	20.24
		2M71W7D	16QAM	0.089	19.51
		2M71W7D	64QAM	0.069	18.39
		2M71W7D	256QAM	0.033	15.19
LTE – Band2 (5)	1852.5 - 1907.5	4M53G7D	QPSK	0.102	20.09
		4M50W7D	16QAM	0.087	19.38
		4M52W7D	64QAM	0.067	18.26
		4M54W7D	256QAM	0.033	15.13
LTE – Band2 (10)	1855.0 - 1905.0	9M01G7D	QPSK	0.100	19.98
		9M00W7D	16QAM	0.083	19.21
		9M00W7D	64QAM	0.064	18.09
		9M02W7D	256QAM	0.032	14.99
LTE – Band2 (15)	1857.5 - 1902.5	13M5G7D	QPSK	0.099	19.94
		13M5W7D	16QAM	0.083	19.17
		13M5W7D	64QAM	0.064	18.05
		13M5W7D	256QAM	0.031	14.96
LTE – Band2 (20)	1860.0 - 1900.0	18M0G7D	QPSK	0.102	20.08
		17M9W7D	16QAM	0.086	19.33
		17M9W7D	64QAM	0.066	18.20
		18M0W7D	256QAM	0.032	15.05

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

Please refer to the [2G3G] Test Report.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Radiated Power	- ANSI C63.26-2015 – Section 5.2.4.4 - KDB 971168 D01 v03r01 – Section 5.8
Radiated Spurious and Harmonic Emissions	- ANSI C63.26-2015 – Section 5.5.3 - KDB 971168 D01 v03r01 – Section 5.8

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq$ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.
The power is calculated by the following formula;
$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.
3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

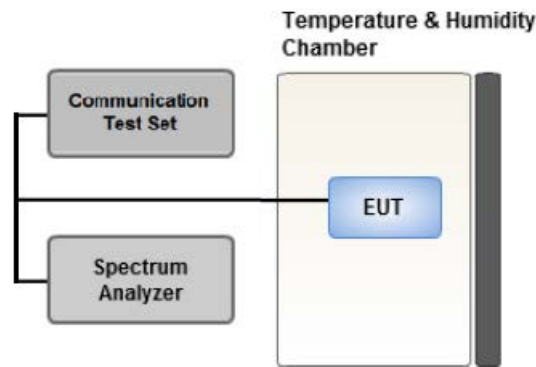

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - for continuous transmissions, set to 1 ms,
 - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

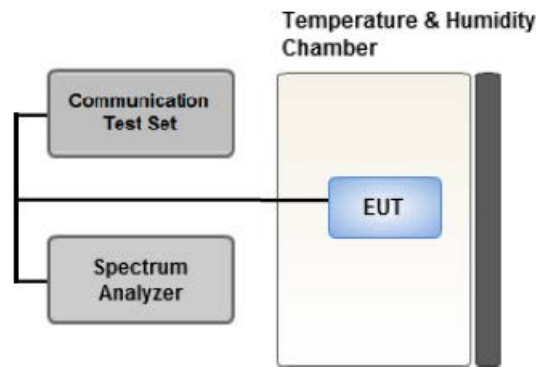

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.


The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq$ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

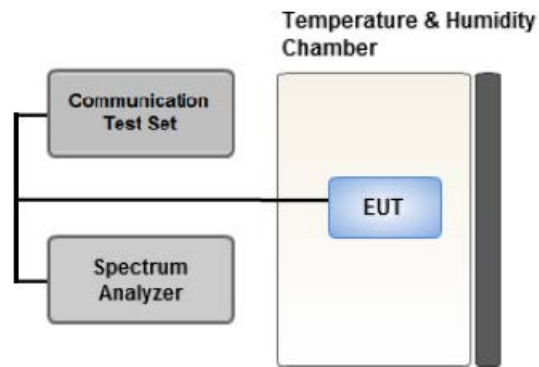

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = Peak
4. Trace Mode = Max Hold
5. Sweep time = auto
6. Number of points in sweep $\geq 2 \times \text{Span} / \text{RBW}$

3.7 BAND EDGE

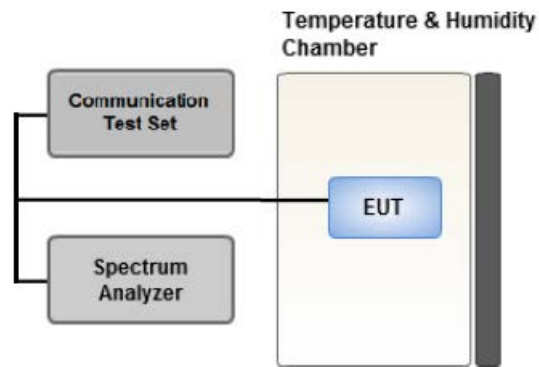

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz/ RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

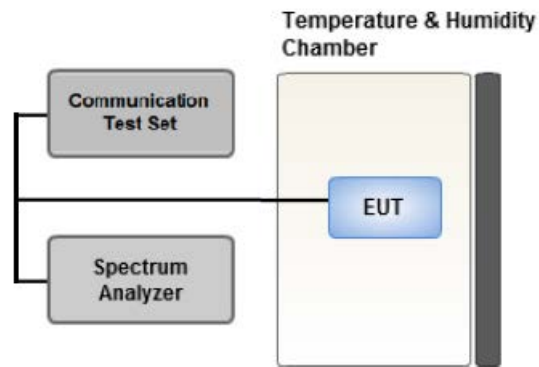

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.


2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter.
Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

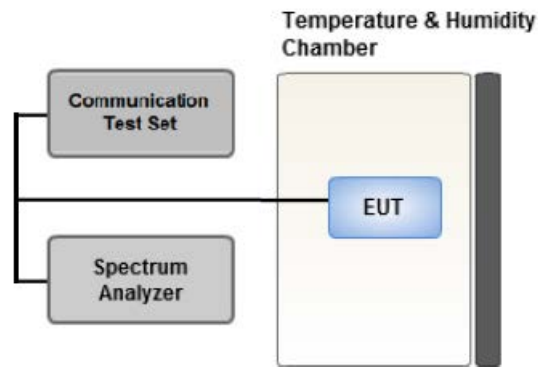

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter.
Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc.)
Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
Mode : Stand alone, Simultaneous transmission scenarios
Worst case : Stand alone
- In the case of radiated spurious emissions, all bandwidth of operation was investigated and the worst case bandwidth results are reported. (Worst case :15 MHz(Main 1 ANT Worst), 3 MHz(Sub 1 ANT))
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.

[Main 1 ANT Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		X
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.2		Y

[Sub 1 ANT Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 9.1		X
Radiated Spurious and Harmonic Emissions	QPSK	See Section 9.2		X

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	Switch box(1 G HPF+LNA)	HCT CO., LTD.,	F2L2	12/12/2025	Annual
RF Switching System	Switch box(3 G HPF+LNA)	HCT CO., LTD.,	F2L3	12/12/2025	Annual
RF Switching System	Switch box(LNA)	HCT CO., LTD.,	F2L5	12/12/2025	Annual
RF Switching System	Switch box(6 G HPF+LNA)	HCT CO., LTD.,	F2L14	12/12/2025	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/07/2025	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/26/2025	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/17/2025	Annual
DC Power Supply	E3632A	Agilent	MY40010147	08/06/2025	Annual
Dipole Antenna	UHAP	Schwarzbeck	01274	03/10/2026	Biennial
Dipole Antenna	UHAP	Schwarzbeck	01288	08/07/2026	Biennial
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	03197	11/28/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	03201	11/28/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/19/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	ROHDE & SCHWARZ	101733	09/19/2025	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/28/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	08/19/2026	Biennial
Radio Communication Test Station	MT8000A	Anritsu Corp.	6272613402	08/28/2025	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/26/2025	Annual
Signal Analyzer (5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/17/2025	Annual
Signal & Spectrum Analyzer (2 Hz~67 GHz)	FSW67	REOHDE & SCHWARZ	101736	05/23/2025	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ kHz)
Occupied Bandwidth	95 (Confidence level about 95 %, $k=2$)
Frequency stability	28 (Confidence level about 95 %, $k=2$)

Parameter	Expanded Uncertainty ($\pm$ dB)
Block Edge	0.70 (Confidence level about 95 %, $k=2$)
Conducted Spurious Emissions	1.18 (Confidence level about 95 %, $k=2$)
Peak- to- Average Ratio	0.68 (Confidence level about 95 %, $k=2$)
Radiated Power	4.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 24.238(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§ 24.232(d)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§ 24.235	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§ 24.232(c)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 24.238(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL (dBm)} + \text{Ant. Gain} - \text{CL (Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL (dBm)} + \text{Ant. Gain} - \text{CL (Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA(Main 1 ANT)

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1850.7	LTE B2 (1.4 MHz)	QPSK	-19.29	15.61	10.15	2.07	H	< 2.00	0.234	23.69	1	0
		16-QAM	-20.00	14.90	10.15	2.07	H		0.199	22.98		
		64-QAM	-21.13	13.77	10.15	2.07	H		0.153	21.85		
		256-QAM	-24.26	10.64	10.15	2.07	H		0.074	18.72		
1880		QPSK	-19.99	15.38	10.11	2.21	H		0.213	23.28	1	0
		16-QAM	-20.71	14.66	10.11	2.21	H		0.180	22.56		
		64-QAM	-21.85	13.52	10.11	2.21	H		0.139	21.42		
		256-QAM	-24.98	10.39	10.11	2.21	H		0.067	18.29		
1909.3		QPSK	-20.93	14.55	10.03	2.17	H		0.174	22.41	1	0
		16-QAM	-21.67	13.81	10.03	2.17	H		0.147	21.67		
		64-QAM	-22.80	12.68	10.03	2.17	H		0.113	20.54		
		256-QAM	-25.91	9.57	10.03	2.17	H		0.055	17.43		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1851.5	LTE B2 (3 MHz)	QPSK	-19.21	15.69	10.15	2.07	H	< 2.00	0.238	23.77	1	0
		16-QAM	-19.96	14.94	10.15	2.07	H		0.200	23.02		
		64-QAM	-21.10	13.80	10.15	2.07	H		0.154	21.88		
		256-QAM	-24.23	10.67	10.15	2.07	H		0.075	18.75		
1880		QPSK	-19.97	15.40	10.11	2.21	H		0.214	23.30	1	8
		16-QAM	-20.76	14.61	10.11	2.21	H		0.178	22.51		
		64-QAM	-21.89	13.48	10.11	2.21	H		0.137	21.38		
		256-QAM	-25.00	10.37	10.11	2.21	H		0.067	18.27		
1908.5		QPSK	-20.88	14.60	10.03	2.17	H		0.176	22.46	1	0
		16-QAM	-21.58	13.90	10.03	2.17	H		0.150	21.76		
		64-QAM	-22.72	12.76	10.03	2.17	H		0.115	20.62		
		256-QAM	-25.85	9.63	10.03	2.17	H		0.056	17.49		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1852.5	LTE B2 (5 MHz)	QPSK	-19.16	15.84	10.15	2.08	H	< 2.00	0.246	23.91	1	0
		16-QAM	-19.91	15.09	10.15	2.08	H		0.207	23.16		
		64-QAM	-21.14	13.86	10.15	2.08	H		0.156	21.93		
		256-QAM	-24.28	10.72	10.15	2.08	H		0.076	18.79		
1880		QPSK	-20.07	15.30	10.11	2.21	H		0.209	23.20	1	13
		16-QAM	-20.83	14.54	10.11	2.21	H		0.175	22.44		
		64-QAM	-21.95	13.42	10.11	2.21	H		0.136	21.32		
		256-QAM	-25.06	10.31	10.11	2.21	H		0.066	18.21		
1907.5		QPSK	-20.54	14.94	10.03	2.17	H		0.191	22.80	1	0
		16-QAM	-21.30	14.18	10.03	2.17	H		0.160	22.04		
		64-QAM	-22.45	13.03	10.03	2.17	H		0.123	20.89		
		256-QAM	-25.57	9.91	10.03	2.17	H		0.060	17.77		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1855	LTE B2 (10 MHz)	QPSK	-19.06	15.94	10.15	2.08	H	< 2.00	0.252	24.01	1	0
		16-QAM	-19.86	15.14	10.15	2.08	H		0.209	23.21		
		64-QAM	-20.97	14.03	10.15	2.08	H		0.162	22.10		
		256-QAM	-24.01	10.99	10.15	2.08	H		0.081	19.06		
1880		QPSK	-19.55	15.82	10.11	2.21	H		0.236	23.72	1	0
		16-QAM	-20.39	14.98	10.11	2.21	H		0.194	22.88		
		64-QAM	-21.52	13.85	10.11	2.21	H		0.150	21.75		
		256-QAM	-24.53	10.84	10.11	2.21	H		0.075	18.74		
1905		QPSK	-20.48	15.02	10.05	2.19	H		0.194	22.88	1	0
		16-QAM	-21.32	14.18	10.05	2.19	H		0.160	22.04		
		64-QAM	-22.43	13.07	10.05	2.19	H		0.124	20.93		
		256-QAM	-25.44	10.06	10.05	2.19	H		0.062	17.92		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1857.5	LTE B2 (15 MHz)	QPSK	-19.08	16.04	10.14	2.10	H	< 2.00	0.256	24.08	1	0
		16-QAM	-19.88	15.24	10.14	2.10	H		0.213	23.28		
		64-QAM	-21.02	14.10	10.14	2.10	H		0.164	22.14		
		256-QAM	-24.09	11.03	10.14	2.10	H		0.081	19.07		
1880		QPSK	-19.69	15.68	10.11	2.21	H		0.228	23.58	1	0
		16-QAM	-20.41	14.96	10.11	2.21	H		0.193	22.86		
		64-QAM	-21.53	13.84	10.11	2.21	H		0.149	21.74		
		256-QAM	-24.61	10.76	10.11	2.21	H		0.073	18.66		
1902.5		QPSK	-20.20	15.30	10.05	2.19	H		0.207	23.16	1	0
		16-QAM	-20.98	14.52	10.05	2.19	H		0.173	22.38		
		64-QAM	-22.10	13.40	10.05	2.19	H		0.134	21.26		
		256-QAM	-25.18	10.32	10.05	2.19	H		0.066	18.18		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1860	LTE B2 (20 MHz)	QPSK	-19.18	15.94	10.14	2.10	H	< 2.00	0.250	23.98	1	0
		16-QAM	-19.94	15.18	10.14	2.10	H		0.210	23.22		
		64-QAM	-21.06	14.06	10.14	2.10	H		0.162	22.10		
		256-QAM	-24.14	10.98	10.14	2.10	H		0.080	19.02		
1880		QPSK	-19.45	15.92	10.11	2.21	H		0.241	23.82	1	0
		16-QAM	-20.25	15.12	10.11	2.21	H		0.200	23.02		
		64-QAM	-21.37	14.00	10.11	2.21	H		0.155	21.90		
		256-QAM	-24.42	10.95	10.11	2.21	H		0.077	18.85		
1900		QPSK	-20.30	15.19	10.08	2.20	H		0.203	23.07	1	0
		16-QAM	-21.07	14.42	10.08	2.20	H		0.170	22.30		
		64-QAM	-22.21	13.28	10.08	2.20	H		0.131	21.16		
		256-QAM	-25.23	10.26	10.08	2.20	H		0.065	18.14		

8.2 RADIATED SPURIOUS EMISSIONS

■ MODE: LTE B2
 ■ MODULATION SIGNAL: 15 MHz QPSK
 ■ DISTANCE: 3 meters
 ■ LIMIT: -13 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	RB	
								Size	Offset
18675 (1857.5)	3715.00	-53.39	11.78	-60.70	3.11	V	-52.03	1	0
	5572.50	-53.20	12.08	-54.75	3.89	H	-46.56		
	7430.00	-53.85	11.18	-49.91	4.56	H	-43.29		
18900 (1880)	3760.00	-53.98	11.61	-60.47	3.12	V	-51.98	1	0
	5640.00	-51.62	12.03	-52.68	3.92	V	-44.57		
	7520.00	-55.31	11.49	-51.62	4.61	V	-44.74		
19125 (1902.5)	3805.00	-53.99	11.37	-60.33	3.21	V	-52.17	1	0
	5707.50	-51.67	11.88	-52.48	4.02	H	-44.62		
	7610.00	-54.86	11.57	-50.93	4.64	H	-44.00		

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
2	1.4 MHz	1880.0	QPSK	6	0	5.69
			16-QAM			6.28
			64-QAM			6.34
			256-QAM			6.10
	3 MHz		QPSK	15		5.75
			16-QAM			6.23
			64-QAM			6.34
			256-QAM			6.19
	5 MHz		QPSK	25		5.67
			16-QAM			6.26
			64-QAM			6.32
			256-QAM			6.21
	10 MHz		QPSK	50		5.80
			16-QAM			6.30
			64-QAM			6.39
			256-QAM			6.24
	15 MHz		QPSK	75		5.62
			16-QAM			6.20
			64-QAM			6.32
			256-QAM			6.22
	20 MHz		QPSK	100		5.62
			16-QAM			6.27
			64-QAM			6.33
			256-QAM			6.25

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 78 ~ 101.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
2	1.4 MHz	1880.0	QPSK	6	0	1.0983
			16-QAM			1.0952
			64-QAM			1.0964
			256-QAM			1.0965
	3 MHz		QPSK	15		2.7170
			16-QAM			2.6991
			64-QAM			2.7043
			256-QAM			2.7174
	5 MHz		QPSK	25		4.5271
			16-QAM			4.5106
			64-QAM			4.5234
			256-QAM			4.5287
	10 MHz		QPSK	50		9.0005
			16-QAM			9.0084
			64-QAM			8.9967
			256-QAM			9.0052
	15 MHz		QPSK	75		13.467
			16-QAM			13.465
			64-QAM			13.477
			256-QAM			13.502
	20 MHz		QPSK	100		17.963
			16-QAM			17.912
			64-QAM			17.938
			256-QAM			17.915

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 102 ~ 125.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
2	1.4	1850.70	6.9193	28.5910	-64.165	-35.574	-13.00
		1880.00	5.6032	28.5910	-63.928	-35.337	
		1909.30	6.2313	28.5910	-64.579	-35.988	
	3	1851.50	5.0150	28.5910	-63.755	-35.164	
		1880.00	3.7189	27.9760	-64.122	-36.146	
		1908.50	3.7089	27.9760	-64.900	-36.924	
	5	1852.50	3.6990	27.9760	-64.231	-36.255	
		1880.00	5.3739	28.5910	-64.149	-35.558	
		1907.50	2.7319	27.9760	-64.138	-36.162	
	10	1855.00	3.6890	27.9760	-64.130	-36.154	
		1880.00	3.6691	27.9760	-64.261	-36.285	
		1905.00	5.4238	28.5910	-63.629	-35.038	
	15	1857.50	7.2782	28.5910	-64.768	-36.177	
		1880.00	6.6102	28.5910	-63.376	-34.785	
		1902.50	3.6990	27.9760	-63.765	-35.789	
	20	1860.00	3.7089	27.9760	-64.005	-36.029	
		1880.00	5.6132	28.5910	-64.315	-35.724	
		1900.00	2.2234	27.9760	-64.537	-36.561	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 126 ~ 161.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 162 ~ 197.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


MODE:	<u>LTE B2</u>
OPERATING FREQUENCY:	<u>1850,700,000 Hz</u>
CHANNEL:	<u>18607 (1.4 MHz)</u>
REFERENCE VOLTAGE:	<u>3.860 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1850 700 005	0.0	0.000 000	0.000
100 %		-30	1850 700 001	-4.7	0.000 000	-0.003
100 %		-20	1850 700 010	4.2	0.000 000	0.002
100 %		-10	1850 700 001	-4.3	0.000 000	-0.002
100 %		0	1850 700 011	5.6	0.000 000	0.003
100 %		+10	1850 700 009	3.8	0.000 000	0.002
100 %		+30	1850 700 010	4.9	0.000 000	0.003
100 %		+40	1850 700 000	-5.6	0.000 000	-0.003
100 %		+50	1850 700 013	7.5	0.000 000	0.004
Batt. Endpoint	3.400	+20	1850 700 013	7.2	0.000 000	0.004

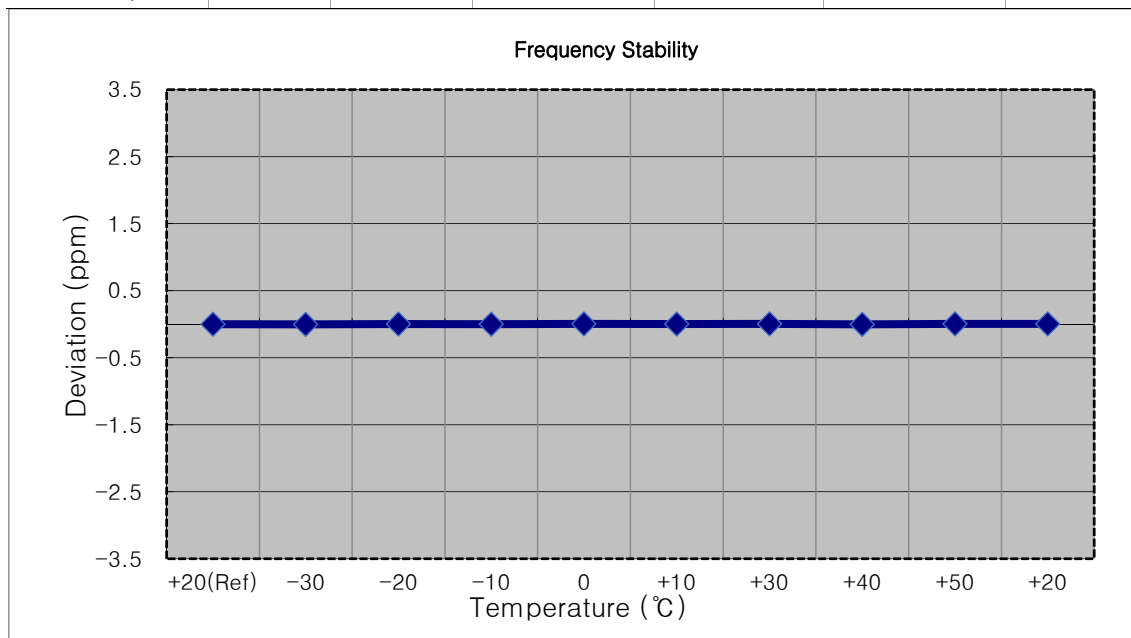


- MODE: LTE B2
- OPERATING FREQUENCY: 1851,500,000 Hz
- CHANNEL: 18615 (3 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1851 499 994	0.0	0.000 000	0.000
100 %		-30	1851 500 000	6.6	0.000 000	0.004
100 %		-20	1851 500 002	7.7	0.000 000	0.004
100 %		-10	1851 499 999	5.4	0.000 000	0.003
100 %		0	1851 500 000	6.5	0.000 000	0.004
100 %		+10	1851 500 001	7.5	0.000 000	0.004
100 %		+30	1851 499 997	3.4	0.000 000	0.002
100 %		+40	1851 499 998	4.5	0.000 000	0.002
100 %		+50	1851 500 001	7.5	0.000 000	0.004
Batt. Endpoint	3.400	+20	1851 499 999	5.4	0.000 000	0.003

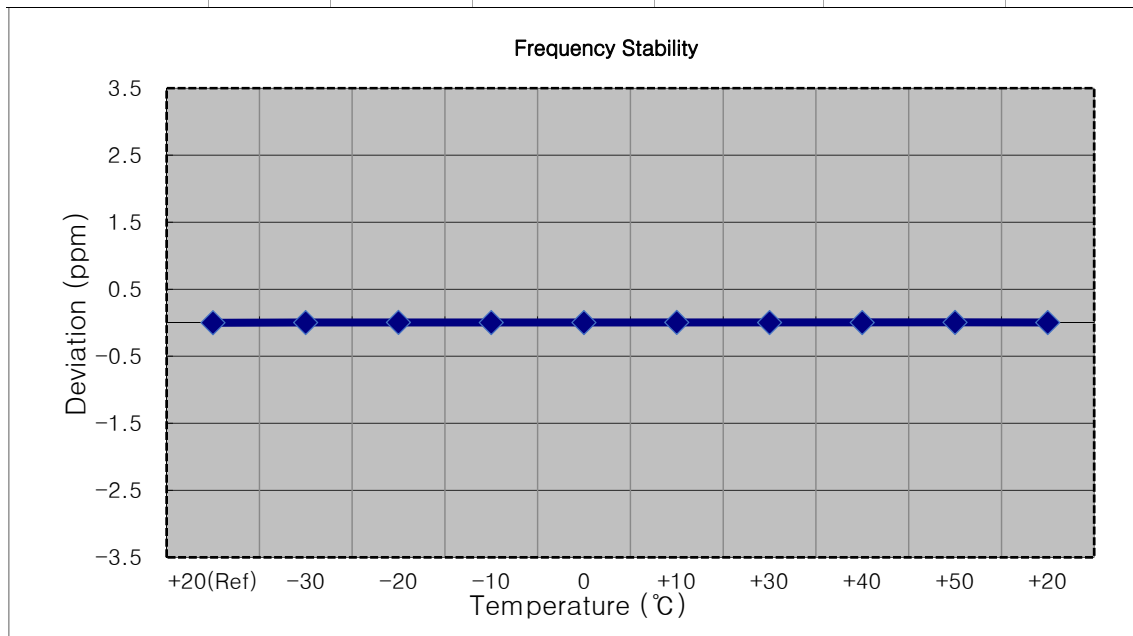


- MODE: LTE B2
- OPERATING FREQUENCY: 1852,500,000 Hz
- CHANNEL: 18625 (5 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1852 499 996	0.0	0.000 000	0.000
100 %		-30	1852 500 000	3.9	0.000 000	0.002
100 %		-20	1852 499 992	-3.6	0.000 000	-0.002
100 %		-10	1852 500 001	4.9	0.000 000	0.003
100 %		0	1852 499 999	3.5	0.000 000	0.002
100 %		+10	1852 499 993	-2.8	0.000 000	-0.002
100 %		+30	1852 500 000	4.5	0.000 000	0.002
100 %		+40	1852 499 999	3.2	0.000 000	0.002
100 %		+50	1852 500 001	5.4	0.000 000	0.003
Batt. Endpoint	3.400	+20	1852 500 000	4.6	0.000 000	0.002

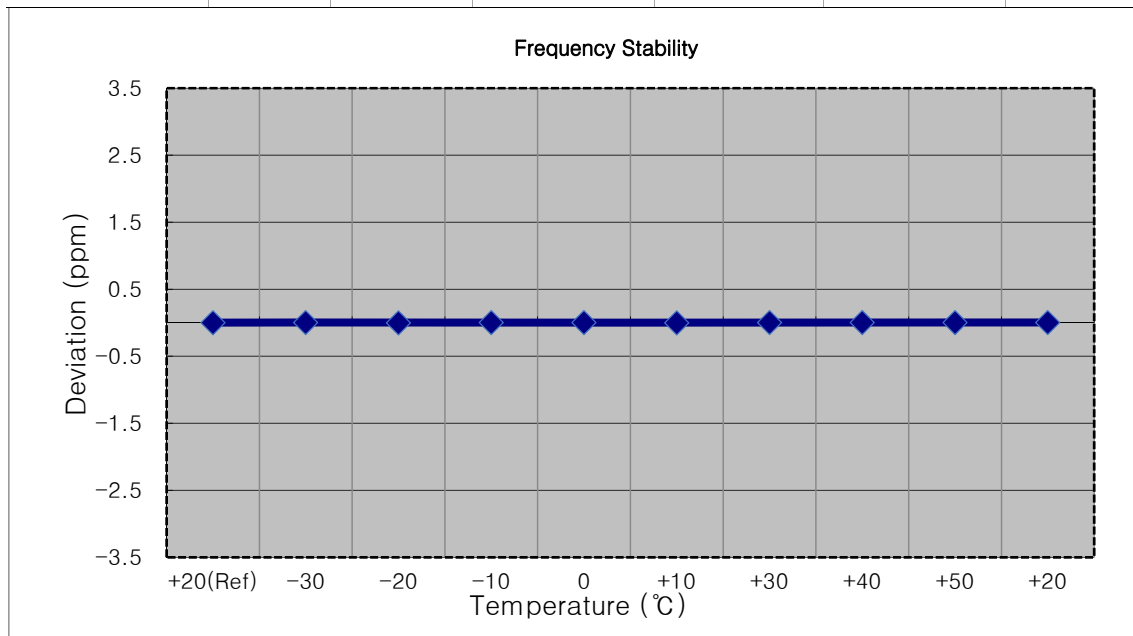


- MODE: LTE B2
- OPERATING FREQUENCY: 1855,000,000 Hz
- CHANNEL: 18650 (10 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1855 000 006	0.0	0.000 000	0.000
100 %		-30	1855 000 001	-5.3	0.000 000	-0.003
100 %		-20	1855 000 002	-4.3	0.000 000	-0.002
100 %		-10	1855 000 010	3.4	0.000 000	0.002
100 %		0	1855 000 010	3.8	0.000 000	0.002
100 %		+10	1855 000 011	4.3	0.000 000	0.002
100 %		+30	1855 000 011	4.3	0.000 000	0.002
100 %		+40	1855 000 012	5.9	0.000 000	0.003
100 %		+50	1855 000 003	-3.7	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1855 000 002	-4.1	0.000 000	-0.002

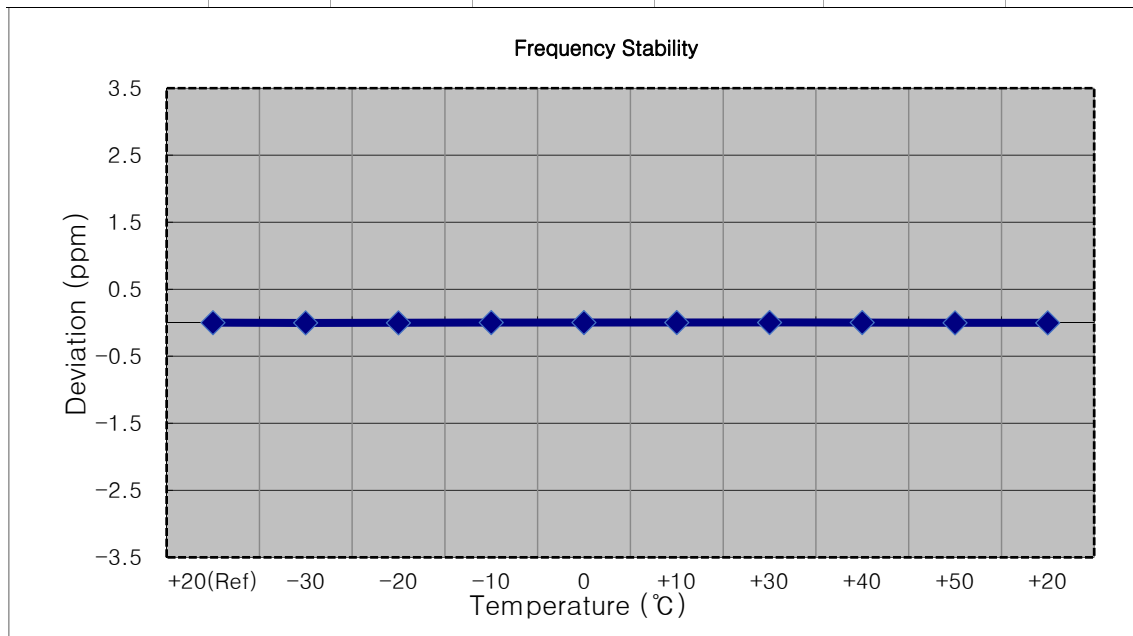


MODE:	<u>LTE B2</u>
OPERATING FREQUENCY:	<u>1857,500,000 Hz</u>
CHANNEL:	<u>18675 (15 MHz)</u>
REFERENCE VOLTAGE:	<u>3.860 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1857 499 996	0.0	0.000 000	0.000
100 %		-30	1857 500 002	5.7	0.000 000	0.003
100 %		-20	1857 500 002	5.2	0.000 000	0.003
100 %		-10	1857 500 000	3.4	0.000 000	0.002
100 %		0	1857 500 000	3.2	0.000 000	0.002
100 %		+10	1857 500 002	5.7	0.000 000	0.003
100 %		+30	1857 500 001	4.6	0.000 000	0.002
100 %		+40	1857 499 993	-3.0	0.000 000	-0.002
100 %		+50	1857 500 002	5.1	0.000 000	0.003
Batt. Endpoint	3.400	+20	1857 500 002	5.2	0.000 000	0.003

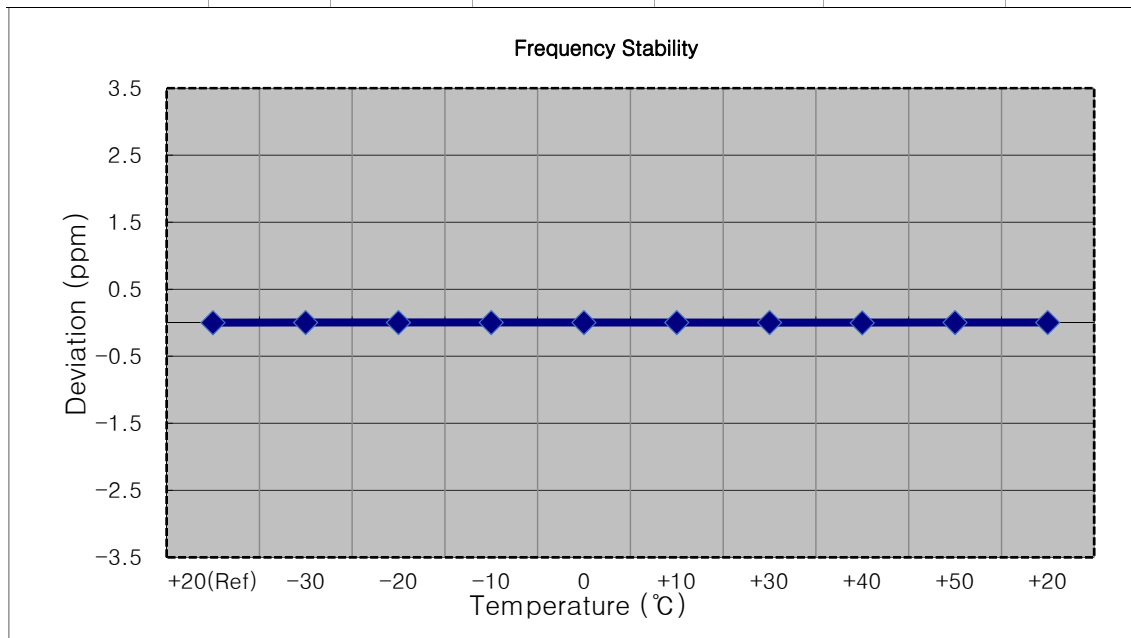


- MODE: LTE B2
- OPERATING FREQUENCY: 1860,000,000 Hz
- CHANNEL: 18700 (20 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1860 000 004	0.0	0.000 000	0.000
100 %		-30	1860 000 000	-3.2	0.000 000	-0.002
100 %		-20	1860 000 010	6.7	0.000 000	0.004
100 %		-10	1860 000 008	3.9	0.000 000	0.002
100 %		0	1860 000 009	5.5	0.000 000	0.003
100 %		+10	1860 000 000	-3.6	0.000 000	-0.002
100 %		+30	1860 000 007	3.8	0.000 000	0.002
100 %		+40	1860 000 009	5.7	0.000 000	0.003
100 %		+50	1860 000 008	4.1	0.000 000	0.002
Batt. Endpoint	3.400	+20	1860 000 008	4.5	0.000 000	0.002

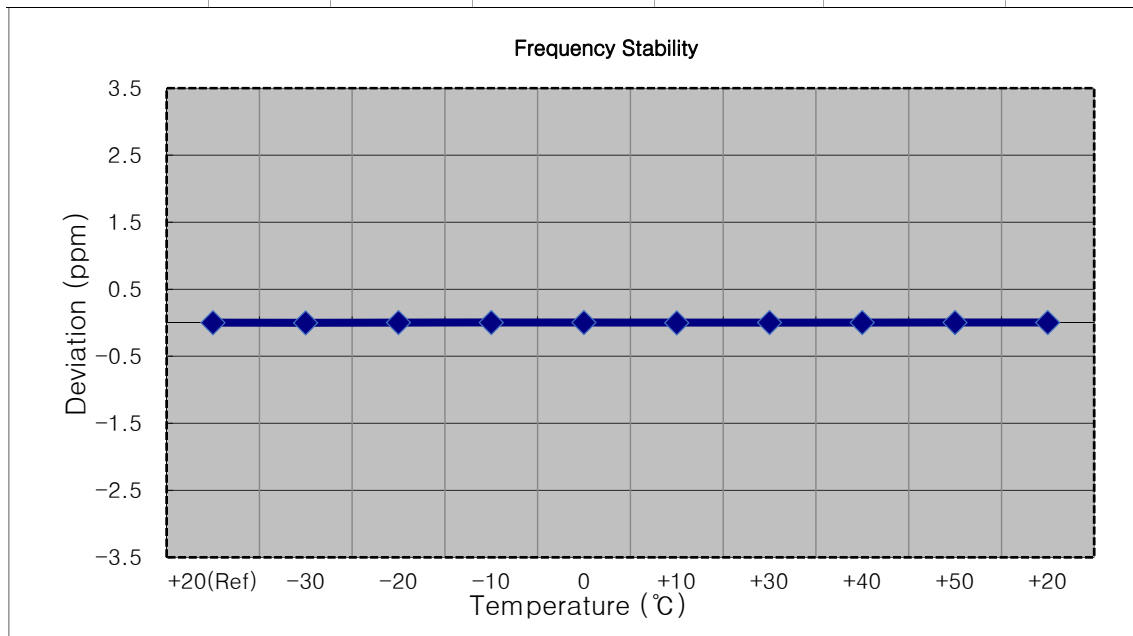


- MODE: LTE B2
- OPERATING FREQUENCY: 1880,000,000 Hz
- CHANNEL: 18900 (1.4 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1879 999 995	0.0	0.000 000	0.000
100 %		-30	1879 999 999	4.0	0.000 000	0.002
100 %		-20	1880 000 000	4.7	0.000 000	0.003
100 %		-10	1880 000 000	5.0	0.000 000	0.003
100 %		0	1879 999 998	2.9	0.000 000	0.002
100 %		+10	1879 999 992	-3.2	0.000 000	-0.002
100 %		+30	1879 999 993	-2.2	0.000 000	-0.001
100 %		+40	1880 000 000	4.3	0.000 000	0.002
100 %		+50	1879 999 993	-2.7	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1879 999 998	2.5	0.000 000	0.001

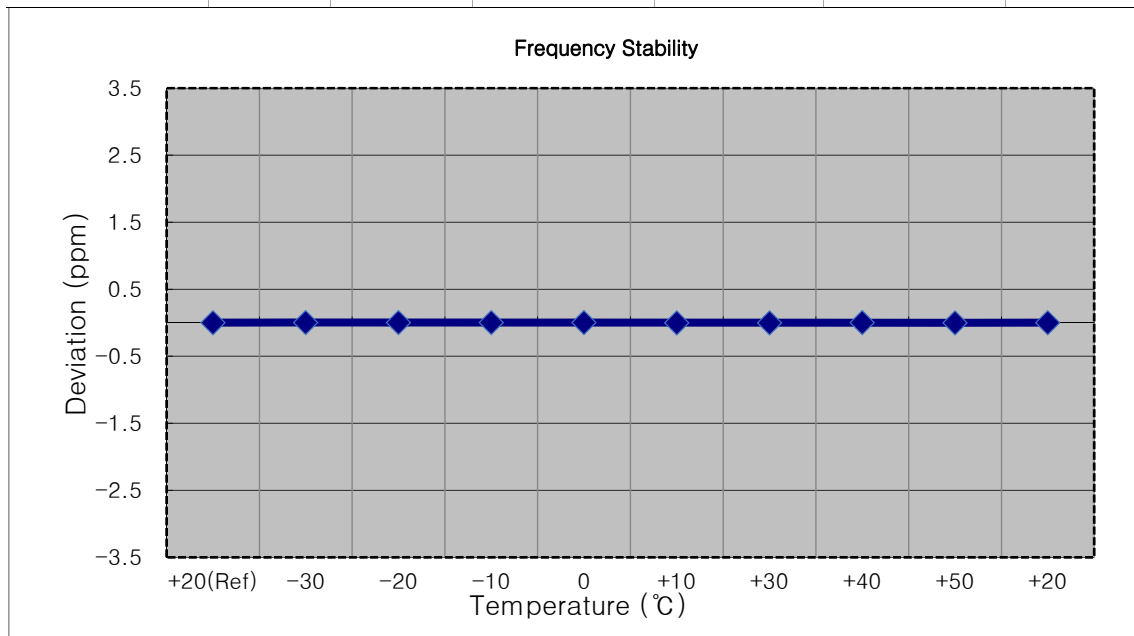


- MODE: LTE B2
- OPERATING FREQUENCY: 1880,000,000 Hz
- CHANNEL: 18900 (3 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1880 000 003	0.0	0.000 000	0.000
100 %		-30	1880 000 008	4.2	0.000 000	0.002
100 %		-20	1880 000 007	3.9	0.000 000	0.002
100 %		-10	1879 999 999	-4.9	0.000 000	-0.003
100 %		0	1880 000 009	5.7	0.000 000	0.003
100 %		+10	1880 000 007	3.1	0.000 000	0.002
100 %		+30	1880 000 009	5.4	0.000 000	0.003
100 %		+40	1880 000 008	4.6	0.000 000	0.002
100 %		+50	1880 000 009	5.6	0.000 000	0.003
Batt. Endpoint	3.400	+20	1879 999 999	-4.4	0.000 000	-0.002

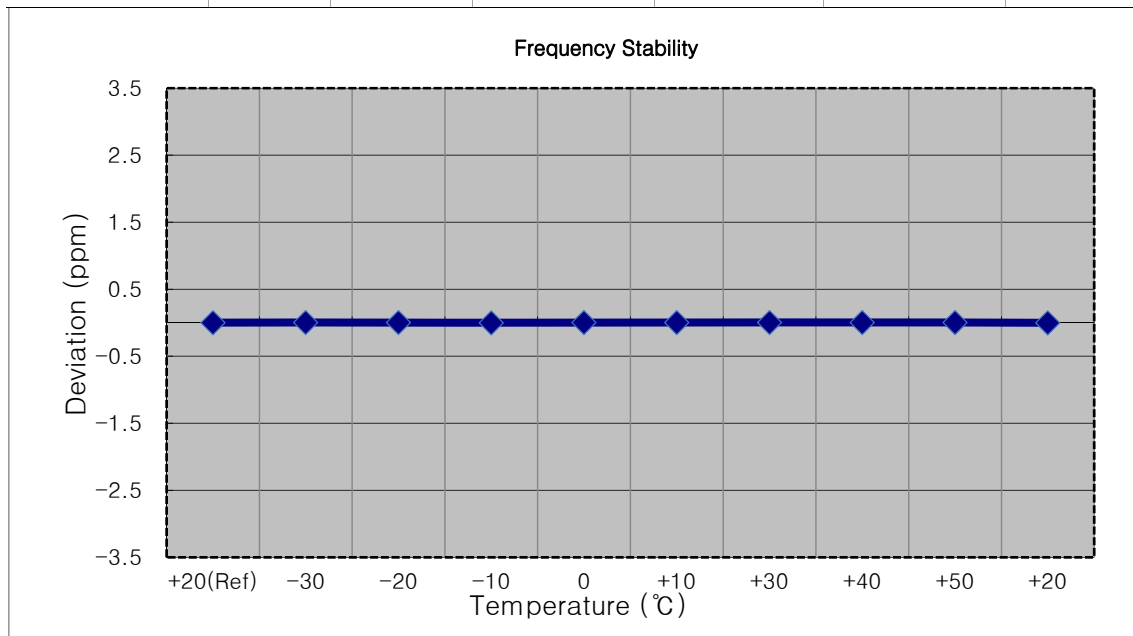


- MODE: LTE B2
- OPERATING FREQUENCY: 1880,000,000 Hz
- CHANNEL: 18900 (5 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1880 000 004	0.0	0.000 000	0.000
100 %		-30	1880 000 007	3.5	0.000 000	0.002
100 %		-20	1880 000 009	5.3	0.000 000	0.003
100 %		-10	1880 000 006	2.5	0.000 000	0.001
100 %		0	1880 000 010	6.0	0.000 000	0.003
100 %		+10	1880 000 007	3.3	0.000 000	0.002
100 %		+30	1880 000 008	4.0	0.000 000	0.002
100 %		+40	1880 000 007	3.4	0.000 000	0.002
100 %		+50	1880 000 006	2.7	0.000 000	0.001
Batt. Endpoint	3.400	+20	1880 000 009	4.9	0.000 000	0.003

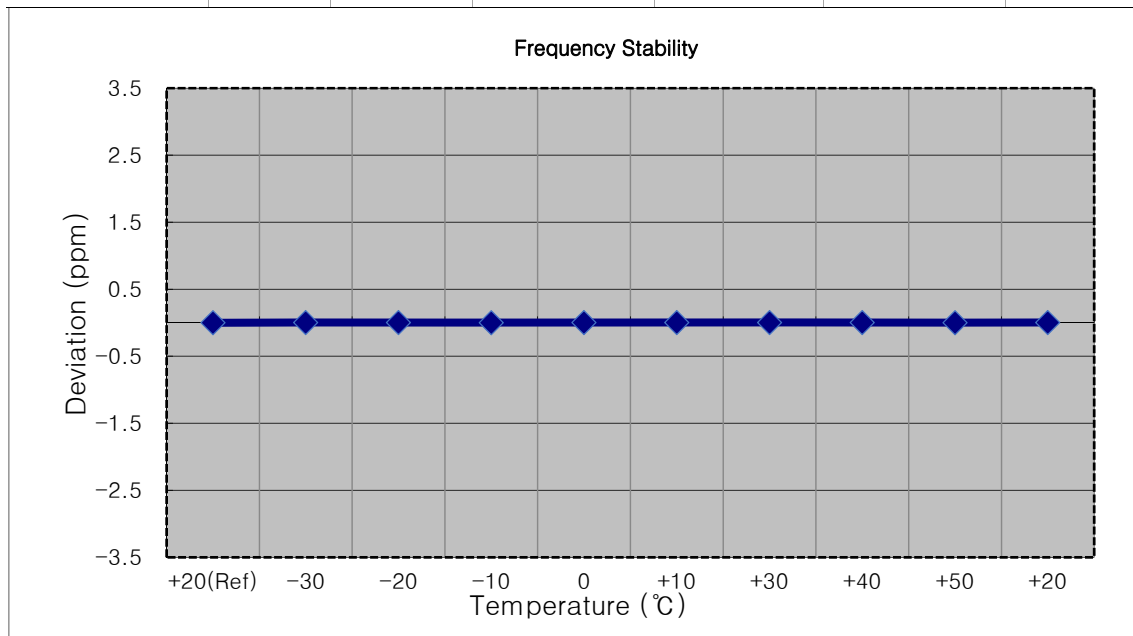


- MODE: LTE B2
- OPERATING FREQUENCY: 1880,000,000 Hz
- CHANNEL: 18900 (10 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1880 000 007	0.0	0.000 000	0.000
100 %		-30	1880 000 011	3.8	0.000 000	0.002
100 %		-20	1880 000 014	7.0	0.000 000	0.004
100 %		-10	1880 000 002	-4.9	0.000 000	-0.003
100 %		0	1880 000 013	5.4	0.000 000	0.003
100 %		+10	1880 000 012	4.9	0.000 000	0.003
100 %		+30	1880 000 011	3.7	0.000 000	0.002
100 %		+40	1880 000 002	-4.8	0.000 000	-0.003
100 %		+50	1880 000 012	5.3	0.000 000	0.003
Batt. Endpoint	3.400	+20	1880 000 012	5.1	0.000 000	0.003

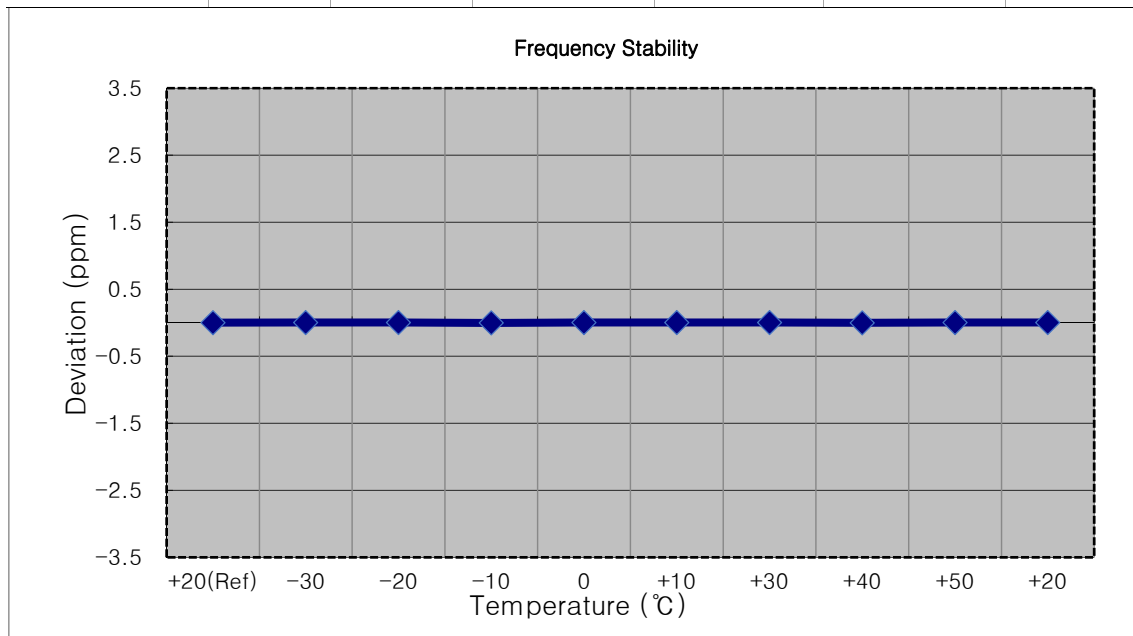


- MODE: LTE B2
- OPERATING FREQUENCY: 1880,000,000 Hz
- CHANNEL: 18900 (15 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1880 000 004	0.0	0.000 000	0.000
100 %		-30	1880 000 008	3.4	0.000 000	0.002
100 %		-20	1880 000 008	3.9	0.000 000	0.002
100 %		-10	1880 000 008	3.7	0.000 000	0.002
100 %		0	1880 000 011	6.3	0.000 000	0.003
100 %		+10	1880 000 010	6.1	0.000 000	0.003
100 %		+30	1880 000 008	3.8	0.000 000	0.002
100 %		+40	1880 000 010	6.0	0.000 000	0.003
100 %		+50	1880 000 001	-3.7	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1880 000 008	3.7	0.000 000	0.002

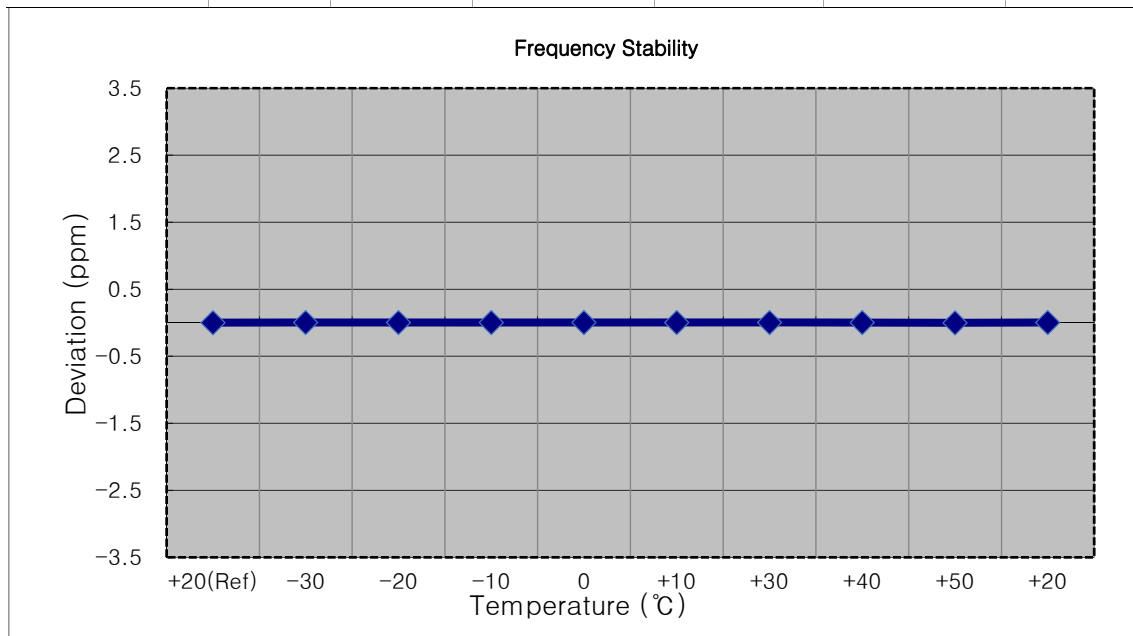


- MODE: LTE B2
- OPERATING FREQUENCY: 1880,000,000 Hz
- CHANNEL: 18900 (20 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1880 000 007	0.0	0.000 000	0.000
100 %		-30	1880 000 013	5.8	0.000 000	0.003
100 %		-20	1880 000 011	3.7	0.000 000	0.002
100 %		-10	1880 000 003	-3.9	0.000 000	-0.002
100 %		0	1880 000 012	5.0	0.000 000	0.003
100 %		+10	1880 000 003	-4.7	0.000 000	-0.002
100 %		+30	1880 000 013	5.6	0.000 000	0.003
100 %		+40	1880 000 014	6.4	0.000 000	0.003
100 %		+50	1880 000 014	6.6	0.000 000	0.004
Batt. Endpoint	3.400	+20	1880 000 013	5.4	0.000 000	0.003

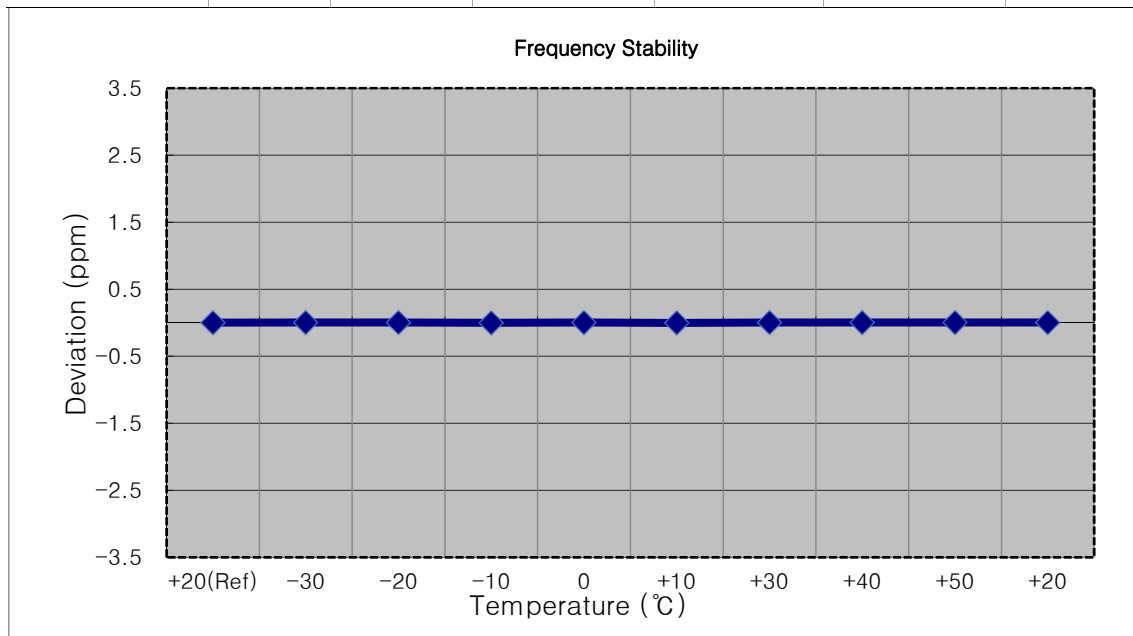


- MODE: LTE B2
- OPERATING FREQUENCY: 1909,300,000 Hz
- CHANNEL: 19193 (1.4 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1909 299 994	0.0	0.000 000	0.000
100 %		-30	1909 299 990	-4.0	0.000 000	-0.002
100 %		-20	1909 300 000	6.0	0.000 000	0.003
100 %		-10	1909 299 990	-4.1	0.000 000	-0.002
100 %		0	1909 300 000	6.2	0.000 000	0.003
100 %		+10	1909 299 989	-4.3	0.000 000	-0.002
100 %		+30	1909 300 000	6.1	0.000 000	0.003
100 %		+40	1909 299 999	5.0	0.000 000	0.003
100 %		+50	1909 300 001	7.7	0.000 000	0.004
Batt. Endpoint	3.400	+20	1909 300 000	6.5	0.000 000	0.003

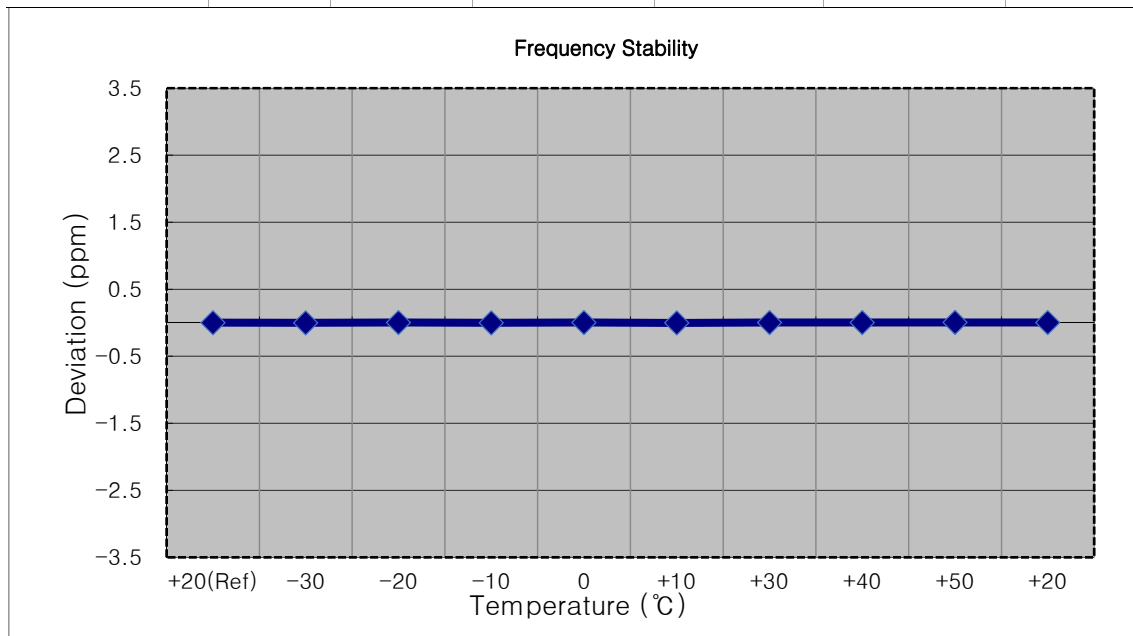


- MODE: LTE B2
- OPERATING FREQUENCY: 1908,500,000 Hz
- CHANNEL: 19185 (3 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1908 500 005	0.0	0.000 000	0.000
100 %		-30	1908 500 012	6.9	0.000 000	0.004
100 %		-20	1908 500 012	7.0	0.000 000	0.004
100 %		-10	1908 500 011	6.3	0.000 000	0.003
100 %		0	1908 500 013	8.1	0.000 000	0.004
100 %		+10	1908 500 011	6.6	0.000 000	0.003
100 %		+30	1908 500 012	7.6	0.000 000	0.004
100 %		+40	1908 500 013	8.2	0.000 000	0.004
100 %		+50	1908 500 012	7.1	0.000 000	0.004
Batt. Endpoint	3.400	+20	1908 500 010	5.4	0.000 000	0.003

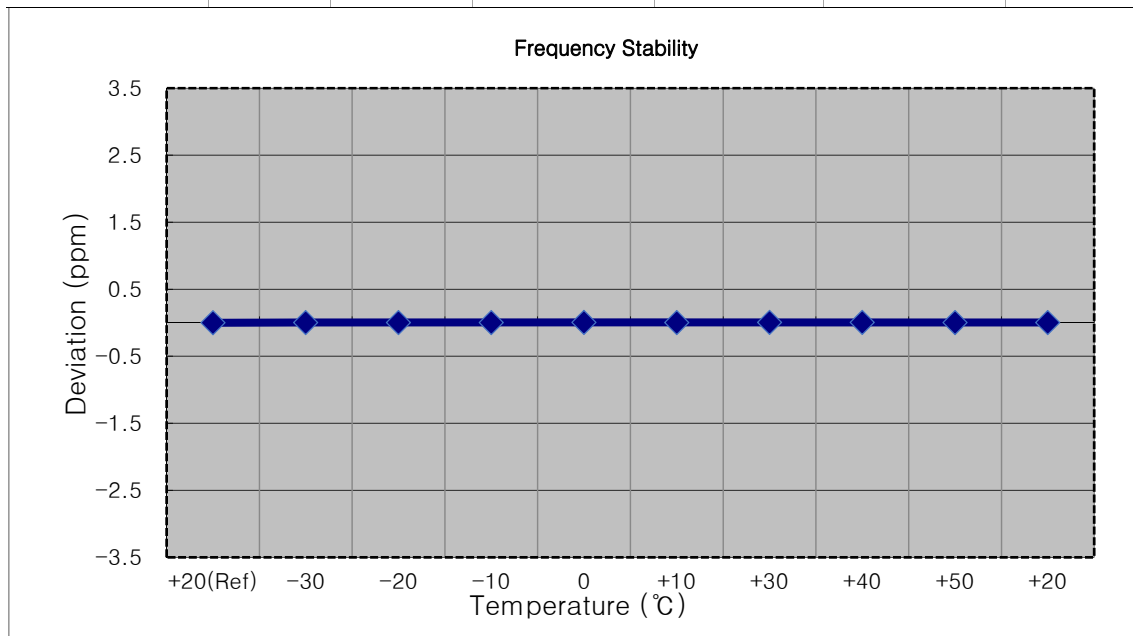


- MODE: LTE B2
- OPERATING FREQUENCY: 1907,500,000 Hz
- CHANNEL: 19175 (5 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1907 500 004	0.0	0.000 000	0.000
100 %		-30	1907 500 011	7.4	0.000 000	0.004
100 %		-20	1907 500 009	5.9	0.000 000	0.003
100 %		-10	1907 500 006	2.9	0.000 000	0.002
100 %		0	1907 500 012	8.3	0.000 000	0.004
100 %		+10	1907 499 999	-4.4	0.000 000	-0.002
100 %		+30	1907 500 007	3.3	0.000 000	0.002
100 %		+40	1907 500 011	7.3	0.000 000	0.004
100 %		+50	1907 500 011	7.0	0.000 000	0.004
Batt. Endpoint	3.400	+20	1907 500 010	6.2	0.000 000	0.003

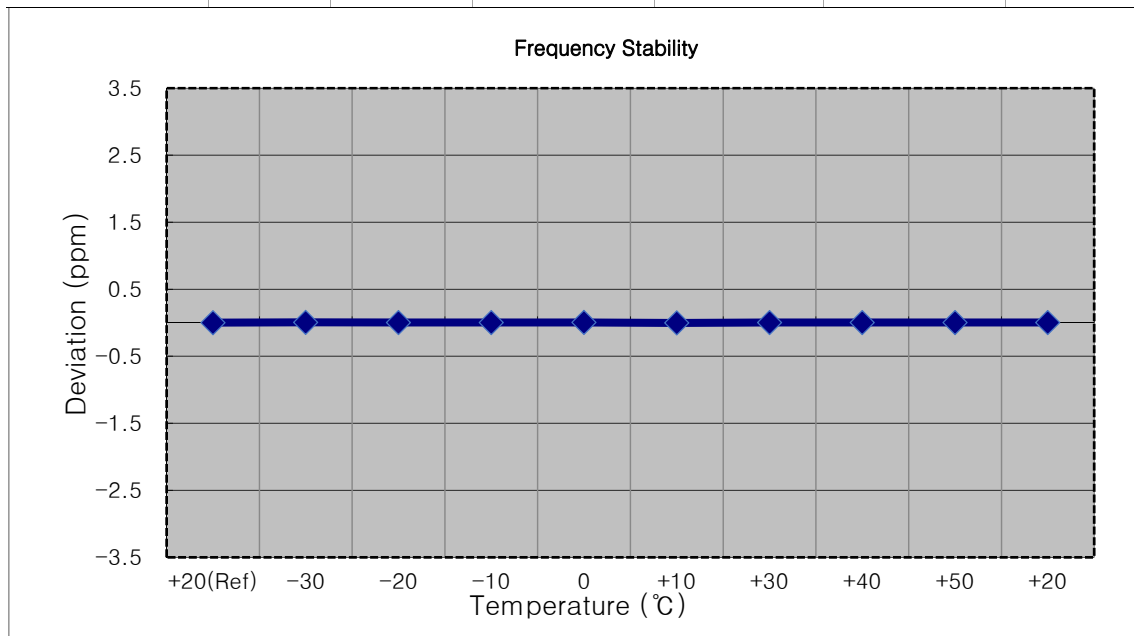


- MODE: LTE B2
- OPERATING FREQUENCY: 1905,000,000 Hz
- CHANNEL: 19150 (10 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1905 000 005	0.0	0.000 000	0.000
100 %		-30	1905 000 010	4.5	0.000 000	0.002
100 %		-20	1905 000 010	4.5	0.000 000	0.002
100 %		-10	1905 000 010	4.9	0.000 000	0.003
100 %		0	1905 000 002	-3.0	0.000 000	-0.002
100 %		+10	1905 000 008	3.4	0.000 000	0.002
100 %		+30	1905 000 009	4.1	0.000 000	0.002
100 %		+40	1905 000 007	2.4	0.000 000	0.001
100 %		+50	1905 000 011	5.5	0.000 000	0.003
Batt. Endpoint	3.400	+20	1905 000 010	4.6	0.000 000	0.002

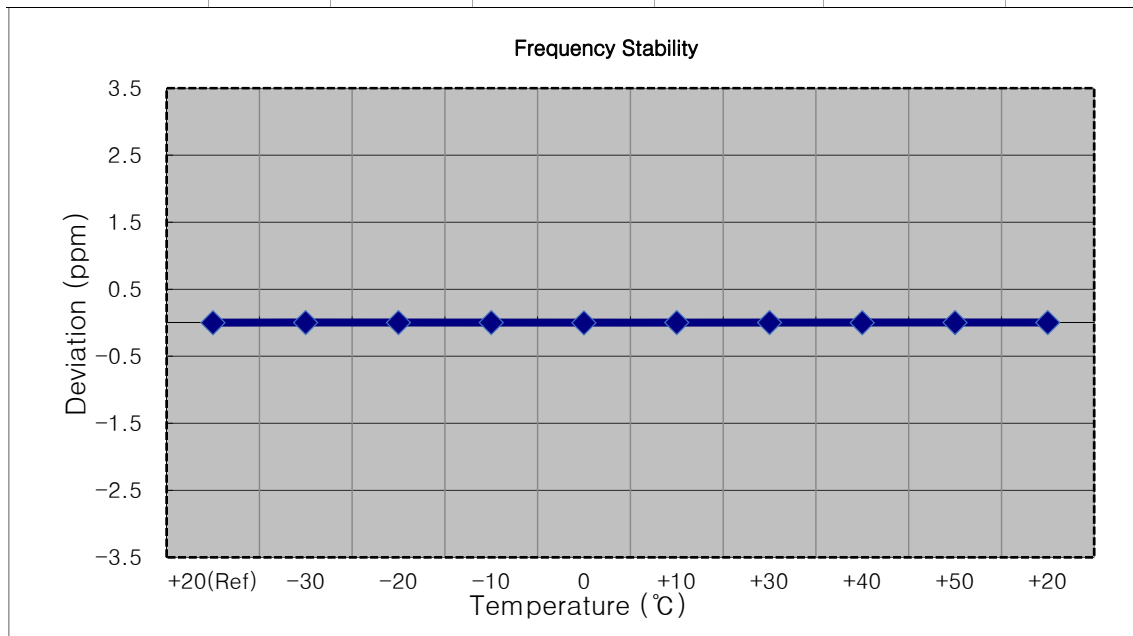


- MODE: LTE B2
- OPERATING FREQUENCY: 1902,500,000 Hz
- CHANNEL: 19125 (15 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1902 499 997	0.0	0.000 000	0.000
100 %		-30	1902 499 992	-4.7	0.000 000	-0.002
100 %		-20	1902 500 002	5.6	0.000 000	0.003
100 %		-10	1902 500 000	3.7	0.000 000	0.002
100 %		0	1902 500 003	5.8	0.000 000	0.003
100 %		+10	1902 499 991	-5.4	0.000 000	-0.003
100 %		+30	1902 500 001	3.9	0.000 000	0.002
100 %		+40	1902 500 003	6.1	0.000 000	0.003
100 %		+50	1902 499 999	2.2	0.000 000	0.001
Batt. Endpoint	3.400	+20	1902 500 001	4.6	0.000 000	0.002

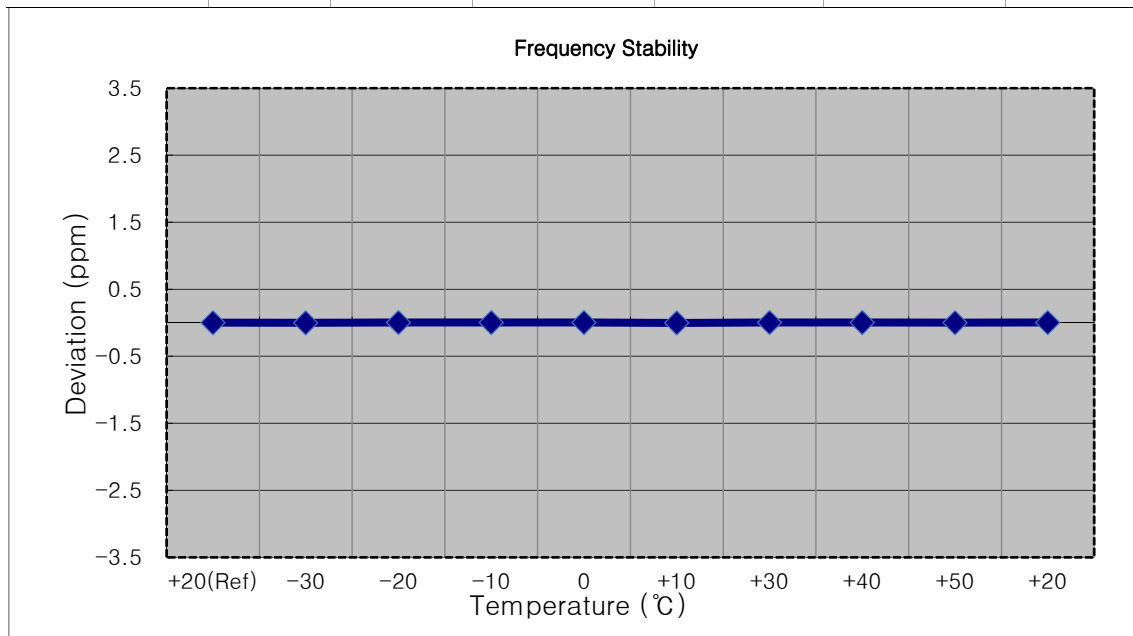

- MODE: LTE B2
- OPERATING FREQUENCY: 1900,000,000 Hz
- CHANNEL: 19100 (20 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1900 000 003	0.0	0.000 000	0.000
100 %		-30	1900 000 000	-3.8	0.000 000	-0.002
100 %		-20	1900 000 008	4.4	0.000 000	0.002
100 %		-10	1900 000 008	4.9	0.000 000	0.003
100 %		0	1900 000 007	3.2	0.000 000	0.002
100 %		+10	1900 000 006	2.3	0.000 000	0.001
100 %		+30	1900 000 008	4.2	0.000 000	0.002
100 %		+40	1900 000 001	-2.9	0.000 000	-0.002
100 %		+50	1900 000 006	3.0	0.000 000	0.002
Batt. Endpoint	3.400	+20	1900 000 001	-2.4	0.000 000	-0.001

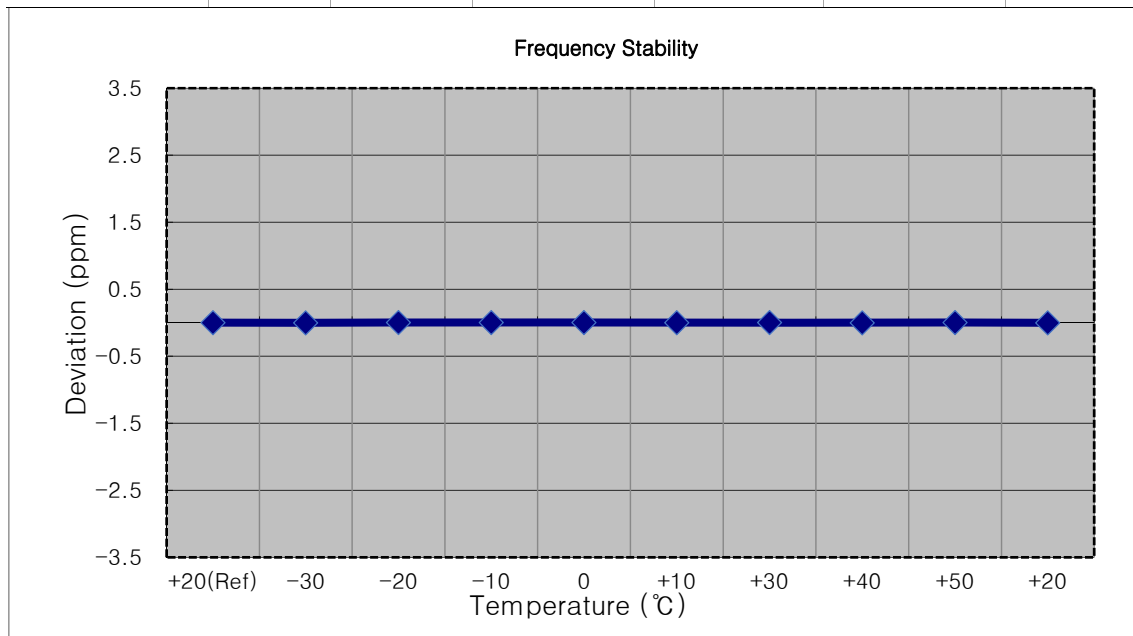

9. TEST DATA(Sub 1 ANT)

9.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1850.7	LTE B2 (1.4 MHz)	QPSK	-24.74	10.16	10.15	2.07	H	< 2.00	0.067	18.24	1	0
		16-QAM	-25.45	9.45	10.15	2.07	H		0.057	17.53		
		64-QAM	-26.59	8.31	10.15	2.07	H		0.044	16.39		
		256-QAM	-29.75	5.15	10.15	2.07	H		0.021	13.23		
1880		QPSK	-23.87	11.50	10.11	2.21	H		0.087	19.40	1	5
		16-QAM	-24.58	10.79	10.11	2.21	H		0.074	18.69		
		64-QAM	-25.72	9.65	10.11	2.21	H		0.057	17.55		
		256-QAM	-28.86	6.51	10.11	2.21	H		0.028	14.41		
1909.3		QPSK	-23.19	12.29	10.03	2.17	H		0.104	20.15	1	5
		16-QAM	-23.84	11.64	10.03	2.17	H		0.089	19.50		
		64-QAM	-24.97	10.51	10.03	2.17	H		0.069	18.37		
		256-QAM	-28.11	7.37	10.03	2.17	H		0.033	15.23		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1851.5	LTE B2 (3 MHz)	QPSK	-24.80	10.10	10.15	2.07	H	< 2.00	0.066	18.18	1	14
		16-QAM	-25.52	9.38	10.15	2.07	H		0.056	17.46		
		64-QAM	-26.66	8.24	10.15	2.07	H		0.043	16.32		
		256-QAM	-29.86	5.04	10.15	2.07	H		0.021	13.12		
1880		QPSK	-23.97	11.40	10.11	2.21	H		0.085	19.30	1	14
		16-QAM	-24.66	10.71	10.11	2.21	H		0.073	18.61		
		64-QAM	-25.79	9.58	10.11	2.21	H		0.056	17.48		
		256-QAM	-28.99	6.38	10.11	2.21	H		0.027	14.28		
1908.5		QPSK	-23.10	12.38	10.03	2.17	H		0.106	20.24	1	14
		16-QAM	-23.83	11.65	10.03	2.17	H		0.089	19.51		
		64-QAM	-24.95	10.53	10.03	2.17	H		0.069	18.39		
		256-QAM	-28.15	7.33	10.03	2.17	H		0.033	15.19		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1852.5	LTE B2 (5 MHz)	QPSK	-24.85	10.15	10.15	2.08	H	< 2.00	0.066	18.22	1	24
		16-QAM	-25.59	9.41	10.15	2.08	H		0.056	17.48		
		64-QAM	-26.71	8.29	10.15	2.08	H		0.043	16.36		
		256-QAM	-29.85	5.15	10.15	2.08	H		0.021	13.22		
1880		QPSK	-24.10	11.27	10.11	2.21	H		0.083	19.17	1	13
		16-QAM	-24.86	10.51	10.11	2.21	H		0.069	18.41		
		64-QAM	-26.01	9.36	10.11	2.21	H		0.053	17.26		
		256-QAM	-29.12	6.25	10.11	2.21	H		0.026	14.15		
1907.5		QPSK	-23.25	12.23	10.03	2.17	H		0.102	20.09	1	24
		16-QAM	-23.96	11.52	10.03	2.17	H		0.087	19.38		
		64-QAM	-25.08	10.40	10.03	2.17	H		0.067	18.26		
		256-QAM	-28.21	7.27	10.03	2.17	H		0.033	15.13		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1855	LTE B2 (10 MHz)	QPSK	-24.82	10.18	10.15	2.08	H	< 2.00	0.067	18.25	1	49
		16-QAM	-25.60	9.40	10.15	2.08	H		0.056	17.47		
		64-QAM	-26.71	8.29	10.15	2.08	H		0.043	16.36		
		256-QAM	-29.81	5.19	10.15	2.08	H		0.021	13.26		
1880		QPSK	-23.93	11.44	10.11	2.21	H		0.086	19.34	1	49
		16-QAM	-24.72	10.65	10.11	2.21	H		0.072	18.55		
		64-QAM	-25.85	9.52	10.11	2.21	H		0.055	17.42		
		256-QAM	-28.95	6.42	10.11	2.21	H		0.027	14.32		
1905		QPSK	-23.38	12.12	10.05	2.19	H		0.100	19.98	1	49
		16-QAM	-24.15	11.35	10.05	2.19	H		0.083	19.21		
		64-QAM	-25.27	10.23	10.05	2.19	H		0.064	18.09		
		256-QAM	-28.37	7.13	10.05	2.19	H		0.032	14.99		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1857.5	LTE B2 (15 MHz)	QPSK	-24.55	10.57	10.14	2.10	H	< 2.00	0.073	18.61	1	74
		16-QAM	-25.31	9.81	10.14	2.10	H		0.061	17.85		
		64-QAM	-26.44	8.68	10.14	2.10	H		0.047	16.72		
		256-QAM	-29.50	5.62	10.14	2.10	H		0.023	13.66		
1880		QPSK	-23.94	11.43	10.11	2.21	H		0.086	19.33	1	74
		16-QAM	-24.73	10.64	10.11	2.21	H		0.071	18.54		
		64-QAM	-25.86	9.51	10.11	2.21	H		0.055	17.41		
		256-QAM	-28.94	6.43	10.11	2.21	H		0.027	14.33		
1902.5		QPSK	-23.42	12.08	10.05	2.19	H		0.099	19.94	1	74
		16-QAM	-24.19	11.31	10.05	2.19	H		0.083	19.17		
		64-QAM	-25.31	10.19	10.05	2.19	H		0.064	18.05		
		256-QAM	-28.40	7.10	10.05	2.19	H		0.031	14.96		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1860	LTE B2 (20 MHz)	QPSK	-24.14	10.98	10.14	2.10	H	< 2.00	0.080	19.02	1	99
		16-QAM	-25.10	10.02	10.14	2.10	H		0.064	18.06		
		64-QAM	-26.22	8.90	10.14	2.10	H		0.049	16.94		
		256-QAM	-29.34	5.78	10.14	2.10	H		0.024	13.82		
1880		QPSK	-23.76	11.61	10.11	2.21	H		0.089	19.51	1	99
		16-QAM	-24.59	10.78	10.11	2.21	H		0.074	18.68		
		64-QAM	-25.71	9.66	10.11	2.21	H		0.057	17.56		
		256-QAM	-28.83	6.54	10.11	2.21	H		0.028	14.44		
1900		QPSK	-23.29	12.20	10.08	2.20	H		0.102	20.08	1	99
		16-QAM	-24.04	11.45	10.08	2.20	H		0.086	19.33		
		64-QAM	-25.17	10.32	10.08	2.20	H		0.066	18.20		
		256-QAM	-28.32	7.17	10.08	2.20	H		0.032	15.05		

9.2 RADIATED SPURIOUS EMISSIONS

☐ MODE: LTE B2
☐ MODULATION SIGNAL: 3 MHz QPSK
☐ DISTANCE: 3 meters
☐ LIMIT: -13 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	RB	
								Size	Offset
18615 (1851.5)	3703.00	-53.85	11.82	-61.35	3.08	V	-52.61	1	14
	5554.50	-54.55	12.07	-56.21	3.88	V	-48.02		
	7406.00	-54.75	11.07	-50.68	4.57	H	-44.18		
18900 (1880)	3760.00	-54.19	11.61	-60.68	3.12	H	-52.19	1	14
	5640.00	-53.54	12.03	-54.60	3.92	H	-46.49		
	7520.00	-55.55	11.49	-51.86	4.61	V	-44.98		
19185 (1908.5)	3817.00	-54.18	11.34	-60.48	3.20	V	-52.34	1	14
	5725.50	-54.83	11.82	-55.62	4.00	V	-47.80		
	7634.00	-53.74	11.56	-49.73	4.67	H	-42.84		

9.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
2	1.4 MHz	1880.0	QPSK	6	0	5.72
			16-QAM			6.35
			64-QAM			6.44
			256-QAM			6.27
	3 MHz		QPSK	15		5.76
			16-QAM			6.29
			64-QAM			6.42
			256-QAM			6.33
	5 MHz		QPSK	25		5.71
			16-QAM			6.33
			64-QAM			6.41
			256-QAM			6.35
	10 MHz		QPSK	50		5.80
			16-QAM			6.31
			64-QAM			6.41
			256-QAM			6.34
	15 MHz		QPSK	75		5.66
			16-QAM			6.23
			64-QAM			6.41
			256-QAM			6.34
	20 MHz		QPSK	100		5.65
			16-QAM			6.33
			64-QAM			6.42
			256-QAM			6.40

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 199 ~ 222.

9.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
2	1.4 MHz	1880.0	QPSK	6	0	1.0961
			16-QAM			1.0957
			64-QAM			1.0977
			256-QAM			1.0944
	3 MHz		QPSK	15		2.7185
			16-QAM			2.7092
			64-QAM			2.7062
			256-QAM			2.7057
	5 MHz		QPSK	25		4.5261
			16-QAM			4.5019
			64-QAM			4.5215
			256-QAM			4.5380
	10 MHz		QPSK	50		9.0099
			16-QAM			9.0023
			64-QAM			9.0042
			256-QAM			9.0152
	15 MHz		QPSK	75		13.476
			16-QAM			13.473
			64-QAM			13.469
			256-QAM			13.471
	20 MHz		QPSK	100		17.982
			16-QAM			17.902
			64-QAM			17.918
			256-QAM			17.956

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 223 ~ 246.

9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
2	1.4	1850.70	6.9392	28.5910	-66.312	-37.721	-13.00
		1880.00	3.6890	27.9760	-65.319	-37.343	
		1909.30	7.1187	28.5910	-66.825	-38.234	
	3	1851.50	3.6691	27.9760	-65.979	-38.003	
		1880.00	3.7089	27.9760	-66.486	-38.510	
		1908.50	3.0609	27.9760	-66.050	-38.074	
	5	1852.50	3.3201	27.9760	-66.432	-38.456	
		1880.00	6.9292	28.5910	-66.410	-37.819	
		1907.50	3.0808	27.9760	-64.739	-36.763	
	10	1855.00	3.6591	27.9760	-66.446	-38.470	
		1880.00	5.6531	28.5910	-66.292	-37.701	
		1905.00	3.7089	27.9760	-65.624	-37.648	
	15	1857.50	2.5923	27.9760	-65.196	-37.220	
		1880.00	3.1905	27.9760	-66.224	-38.248	
		1902.50	7.6172	28.5910	-66.013	-37.422	
	20	1860.00	3.7089	27.9760	-66.424	-38.448	
		1880.00	3.6990	27.9760	-65.878	-37.902	
		1900.00	3.7089	27.9760	-65.734	-37.758	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 247 ~ 282.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


9.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 283 ~ 318.

9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


MODE:	<u>LTE B2</u>
OPERATING FREQUENCY:	<u>1850,700,000 Hz</u>
CHANNEL:	<u>18607 (1.4 MHz)</u>
REFERENCE VOLTAGE:	<u>3.860 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1850 699 997	0.0	0.000 000	0.000
100 %		-30	1850 699 994	-3.4	0.000 000	-0.002
100 %		-20	1850 699 993	-4.5	0.000 000	-0.002
100 %		-10	1850 700 001	4.0	0.000 000	0.002
100 %		0	1850 700 001	3.6	0.000 000	0.002
100 %		+10	1850 700 002	5.2	0.000 000	0.003
100 %		+30	1850 699 991	-5.8	0.000 000	-0.003
100 %		+40	1850 699 992	-5.0	0.000 000	-0.003
100 %		+50	1850 699 994	-3.4	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1850 700 003	6.0	0.000 000	0.003

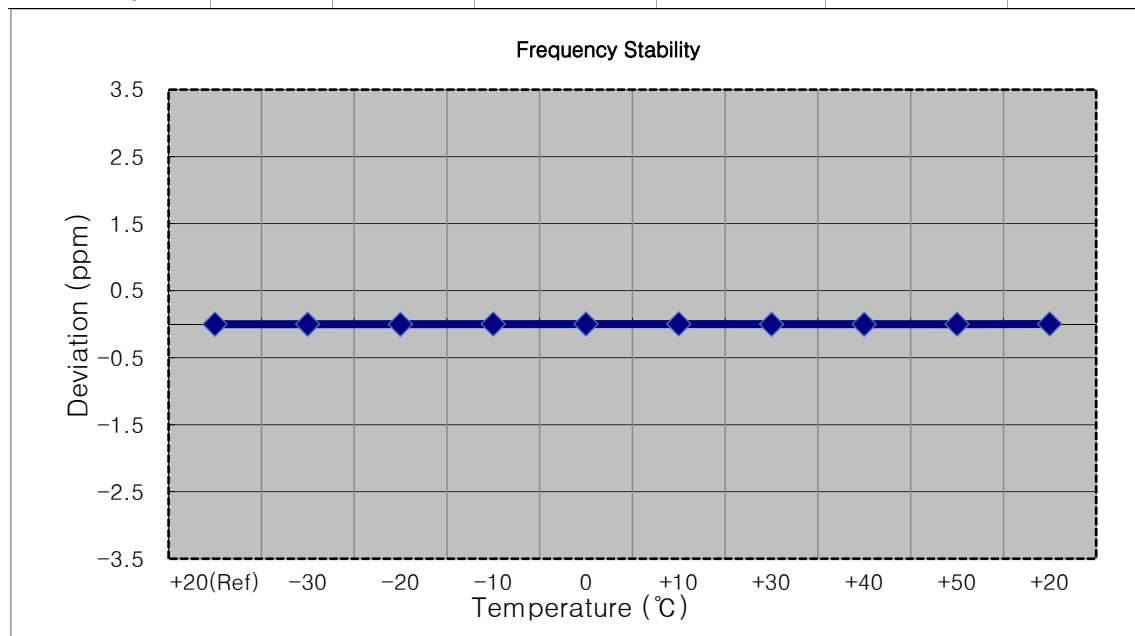


- MODE: LTE B2
- OPERATING FREQUENCY: 1851,500,000 Hz
- CHANNEL: 18615 (3 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1851 500 005	0.0	0.000 000	0.000
100 %		-30	1851 500 009	4.6	0.000 000	0.002
100 %		-20	1851 500 008	3.5	0.000 000	0.002
100 %		-10	1851 499 998	-6.6	0.000 000	-0.004
100 %		0	1851 500 002	-3.2	0.000 000	-0.002
100 %		+10	1851 500 009	4.1	0.000 000	0.002
100 %		+30	1851 500 010	4.8	0.000 000	0.003
100 %		+40	1851 500 012	7.2	0.000 000	0.004
100 %		+50	1851 500 001	-3.4	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1851 500 011	5.9	0.000 000	0.003

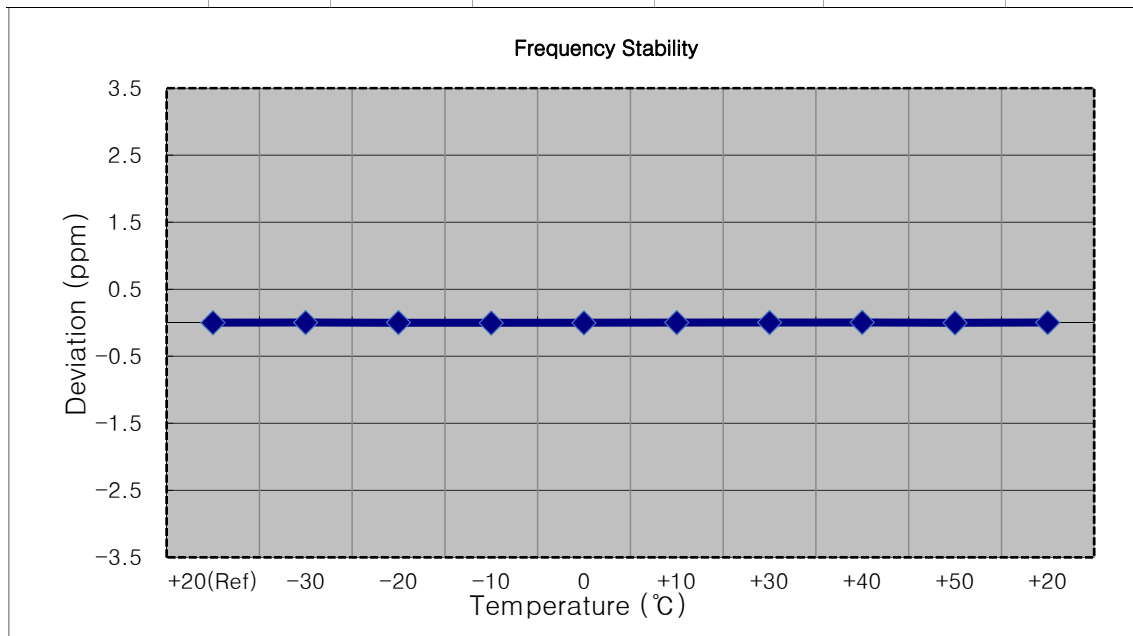


- MODE: LTE B2
- OPERATING FREQUENCY: 1852,500,000 Hz
- CHANNEL: 18625 (5 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1852 500 004	0.0	0.000 000	0.000
100 %		-30	1852 500 008	4.6	0.000 000	0.002
100 %		-20	1852 500 007	3.4	0.000 000	0.002
100 %		-10	1852 500 008	4.2	0.000 000	0.002
100 %		0	1852 499 998	-5.6	0.000 000	-0.003
100 %		+10	1852 500 001	-2.9	0.000 000	-0.002
100 %		+30	1852 500 008	4.6	0.000 000	0.002
100 %		+40	1852 500 001	-2.5	0.000 000	-0.001
100 %		+50	1852 499 999	-4.2	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1852 500 007	3.3	0.000 000	0.002

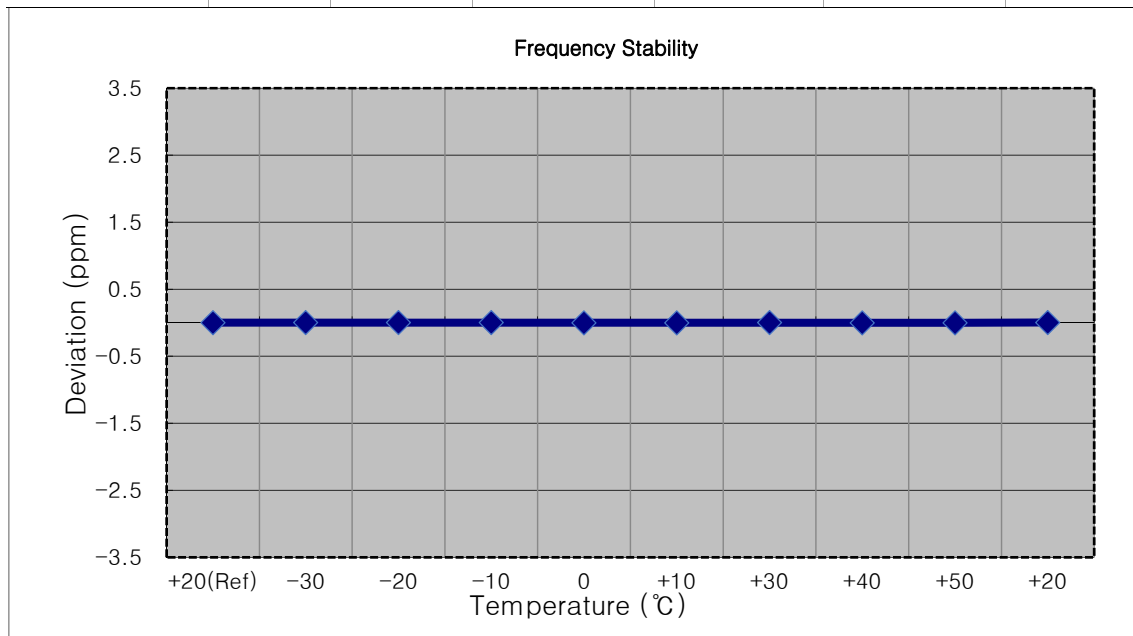


- MODE: LTE B2
- OPERATING FREQUENCY: 1855,000,000 Hz
- CHANNEL: 18650 (10 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1855 000 005	0.0	0.000 000	0.000
100 %		-30	1855 000 009	3.9	0.000 000	0.002
100 %		-20	1855 000 002	-3.3	0.000 000	-0.002
100 %		-10	1855 000 010	5.0	0.000 000	0.003
100 %		0	1855 000 010	4.5	0.000 000	0.002
100 %		+10	1855 000 010	4.4	0.000 000	0.002
100 %		+30	1855 000 001	-4.0	0.000 000	-0.002
100 %		+40	1855 000 010	5.1	0.000 000	0.003
100 %		+50	1855 000 000	-5.4	0.000 000	-0.003
Batt. Endpoint	3.400	+20	1855 000 010	4.7	0.000 000	0.003

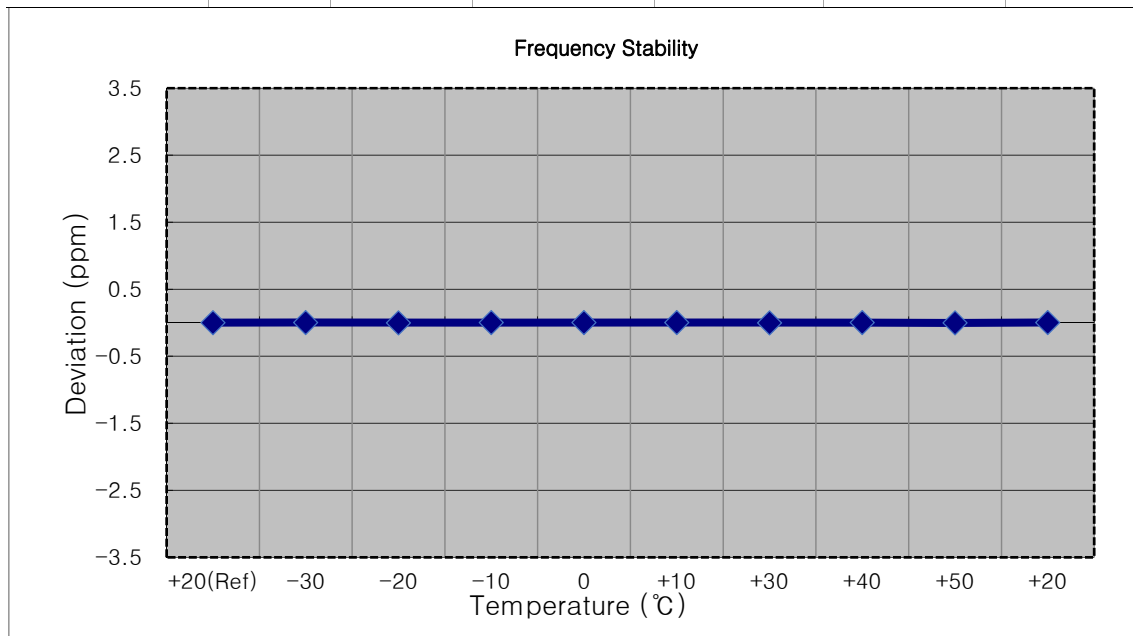


- MODE: LTE B2
- OPERATING FREQUENCY: 1857,500,000 Hz
- CHANNEL: 18675 (15 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1857 500 005	0.0	0.000 000	0.000
100 %		-30	1857 500 010	4.8	0.000 000	0.003
100 %		-20	1857 500 000	-4.6	0.000 000	-0.002
100 %		-10	1857 500 008	3.3	0.000 000	0.002
100 %		0	1857 500 008	3.3	0.000 000	0.002
100 %		+10	1857 500 010	4.8	0.000 000	0.003
100 %		+30	1857 500 010	4.6	0.000 000	0.002
100 %		+40	1857 500 001	-3.6	0.000 000	-0.002
100 %		+50	1857 500 001	-4.2	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1857 500 011	5.8	0.000 000	0.003

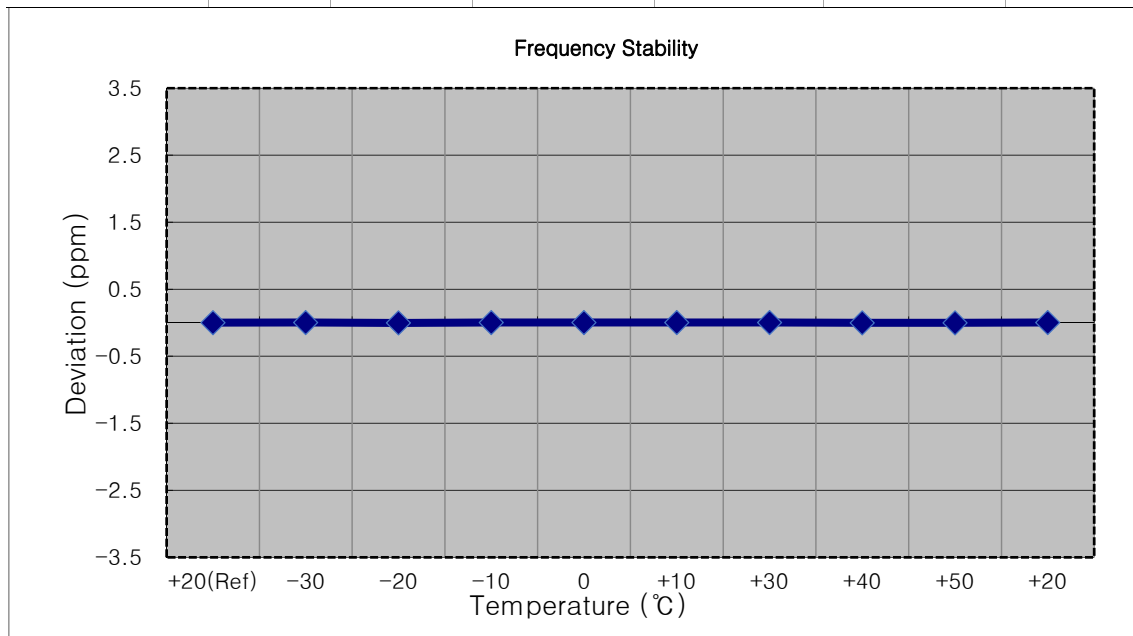


- MODE: LTE B2
- OPERATING FREQUENCY: 1860,000,000 Hz
- CHANNEL: 18700 (20 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1859 999 997	0.0	0.000 000	0.000
100 %		-30	1860 000 000	3.5	0.000 000	0.002
100 %		-20	1860 000 001	4.5	0.000 000	0.002
100 %		-10	1859 999 991	-5.1	0.000 000	-0.003
100 %		0	1860 000 002	5.5	0.000 000	0.003
100 %		+10	1860 000 004	7.3	0.000 000	0.004
100 %		+30	1859 999 993	-3.4	0.000 000	-0.002
100 %		+40	1859 999 994	-3.0	0.000 000	-0.002
100 %		+50	1860 000 002	5.1	0.000 000	0.003
Batt. Endpoint	3.400	+20	1859 999 993	-4.0	0.000 000	-0.002

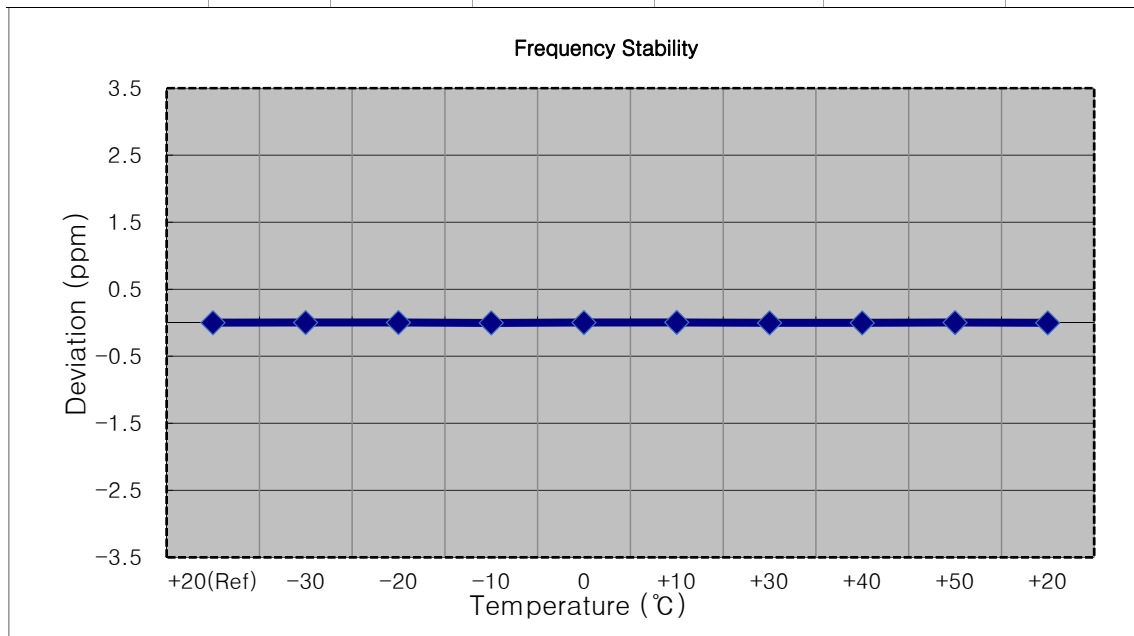


- MODE: LTE B2
- OPERATING FREQUENCY: 1880,000,000 Hz
- CHANNEL: 18900 (1.4 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1880 000 004	0.0	0.000 000	0.000
100 %		-30	1879 999 998	-6.2	0.000 000	-0.003
100 %		-20	1880 000 008	4.0	0.000 000	0.002
100 %		-10	1880 000 008	3.6	0.000 000	0.002
100 %		0	1880 000 008	4.2	0.000 000	0.002
100 %		+10	1880 000 001	-3.4	0.000 000	-0.002
100 %		+30	1880 000 013	9.1	0.000 000	0.005
100 %		+40	1880 000 009	4.7	0.000 000	0.002
100 %		+50	1880 000 009	4.9	0.000 000	0.003
Batt. Endpoint	3.400	+20	1879 999 999	-5.4	0.000 000	-0.003

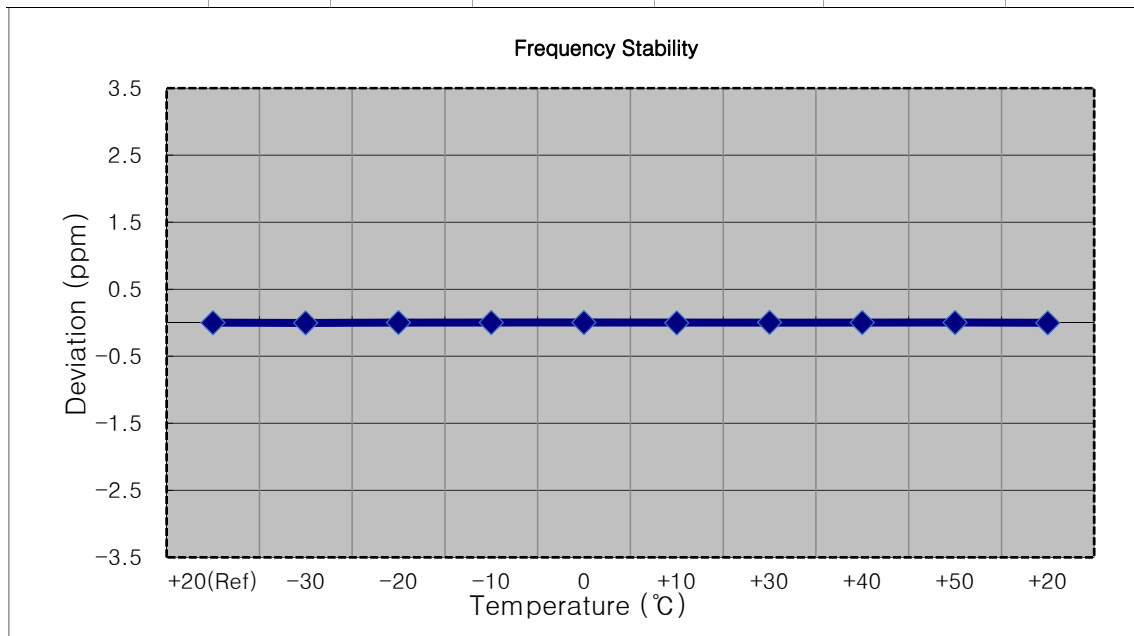


- MODE: LTE B2
- OPERATING FREQUENCY: 1880,000,000 Hz
- CHANNEL: 18900 (3 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1880 000 005	0.0	0.000 000	0.000
100 %		-30	1879 999 999	-5.8	0.000 000	-0.003
100 %		-20	1880 000 013	7.6	0.000 000	0.004
100 %		-10	1880 000 011	5.4	0.000 000	0.003
100 %		0	1880 000 011	5.7	0.000 000	0.003
100 %		+10	1880 000 009	3.7	0.000 000	0.002
100 %		+30	1880 000 012	7.0	0.000 000	0.004
100 %		+40	1880 000 000	-5.1	0.000 000	-0.003
100 %		+50	1880 000 009	3.9	0.000 000	0.002
Batt. Endpoint	3.400	+20	1880 000 008	3.0	0.000 000	0.002

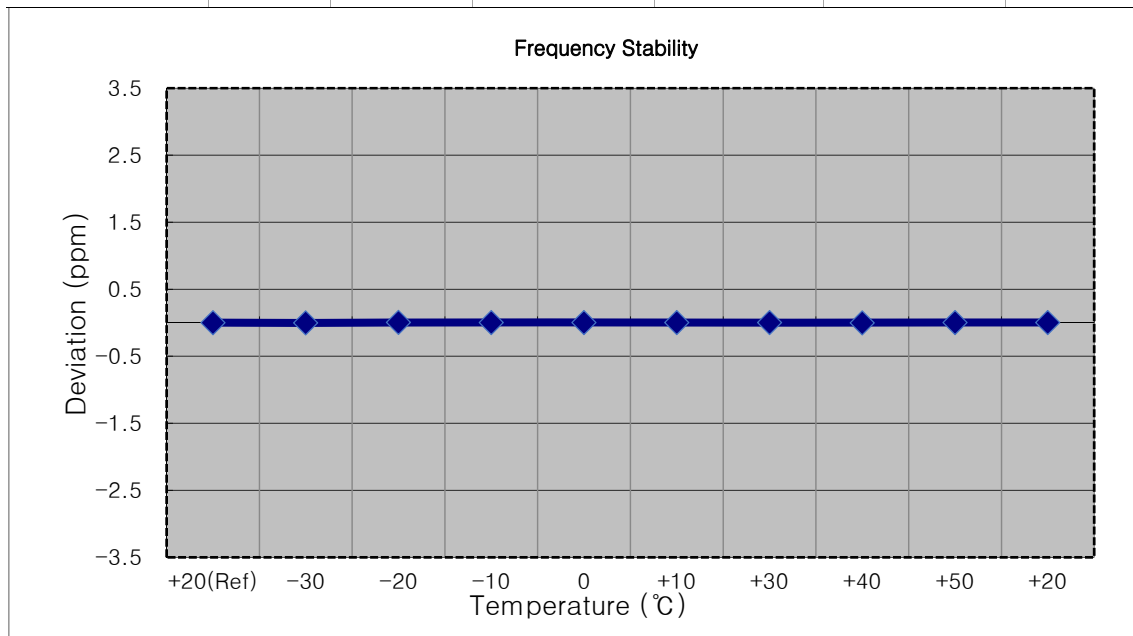


- MODE: LTE B2
- OPERATING FREQUENCY: 1880,000,000 Hz
- CHANNEL: 18900 (5 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1880 000 004	0.0	0.000 000	0.000
100 %		-30	1880 000 000	-3.9	0.000 000	-0.002
100 %		-20	1880 000 007	3.1	0.000 000	0.002
100 %		-10	1880 000 009	4.3	0.000 000	0.002
100 %		0	1880 000 008	3.7	0.000 000	0.002
100 %		+10	1880 000 008	3.6	0.000 000	0.002
100 %		+30	1880 000 000	-3.9	0.000 000	-0.002
100 %		+40	1880 000 007	2.9	0.000 000	0.002
100 %		+50	1880 000 007	2.5	0.000 000	0.001
Batt. Endpoint	3.400	+20	1880 000 000	-4.6	0.000 000	-0.002

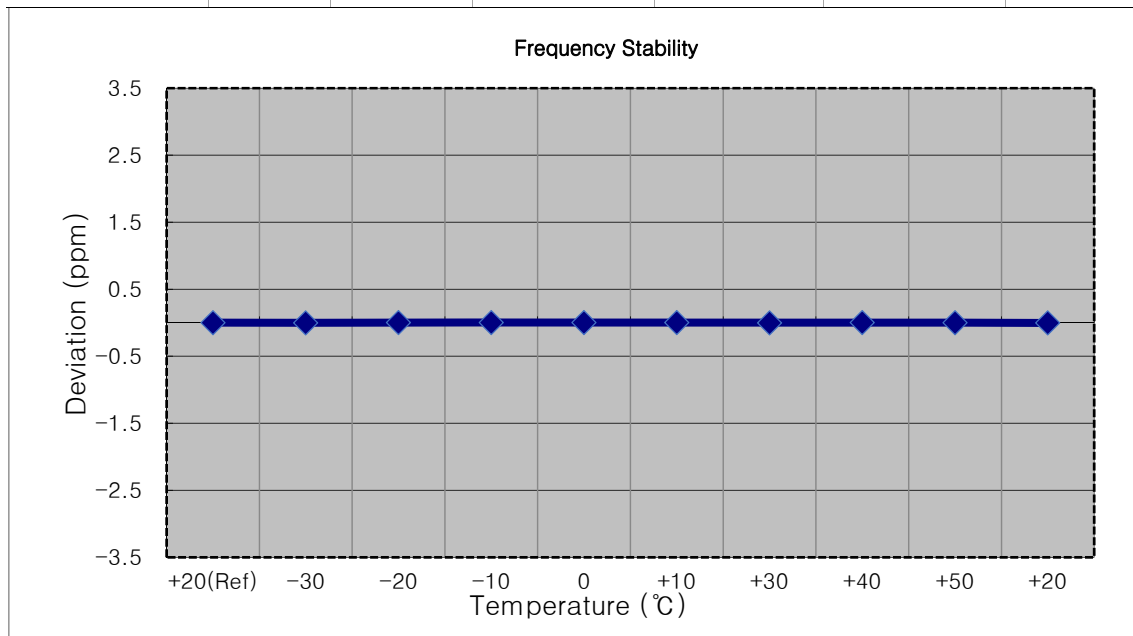


- MODE: LTE B2
- OPERATING FREQUENCY: 1880,000,000 Hz
- CHANNEL: 18900 (10 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1879 999 995	0.0	0.000 000	0.000
100 %		-30	1880 000 001	6.1	0.000 000	0.003
100 %		-20	1879 999 990	-4.9	0.000 000	-0.003
100 %		-10	1880 000 001	5.9	0.000 000	0.003
100 %		0	1879 999 999	4.4	0.000 000	0.002
100 %		+10	1880 000 000	5.0	0.000 000	0.003
100 %		+30	1880 000 001	6.0	0.000 000	0.003
100 %		+40	1880 000 002	7.1	0.000 000	0.004
100 %		+50	1879 999 990	-5.3	0.000 000	-0.003
Batt. Endpoint	3.400	+20	1879 999 992	-3.1	0.000 000	-0.002

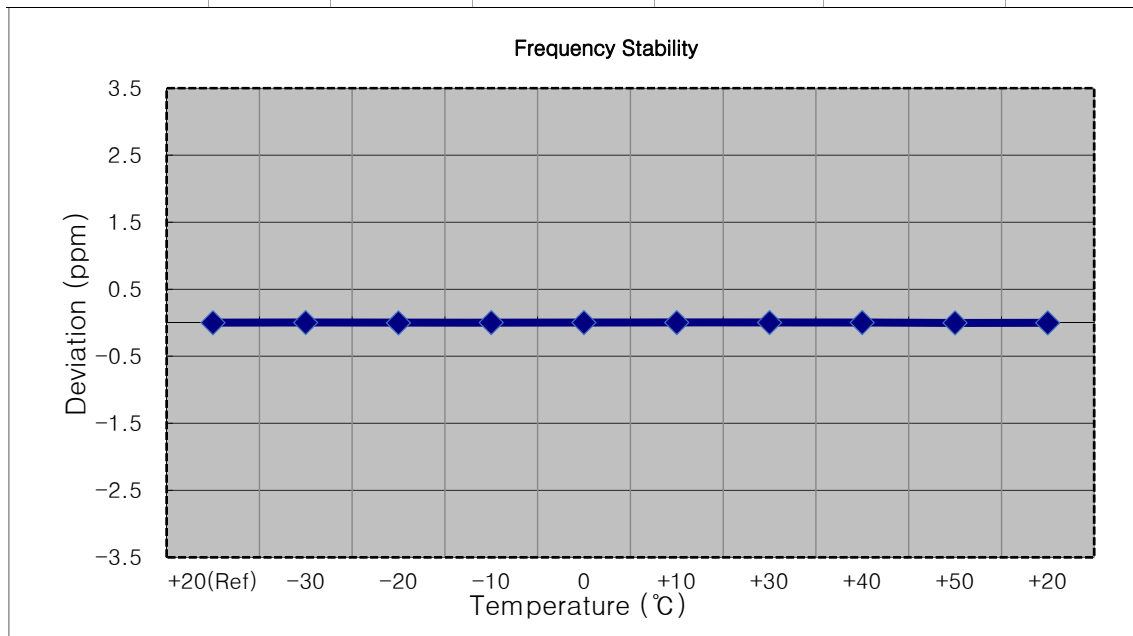


- MODE: LTE B2
- OPERATING FREQUENCY: 1880,000,000 Hz
- CHANNEL: 18900 (15 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1880 000 001	0.0	0.000 000	0.000
100 %		-30	1880 000 006	4.9	0.000 000	0.003
100 %		-20	1879 999 997	-4.1	0.000 000	-0.002
100 %		-10	1880 000 007	5.8	0.000 000	0.003
100 %		0	1880 000 005	4.1	0.000 000	0.002
100 %		+10	1880 000 006	5.3	0.000 000	0.003
100 %		+30	1880 000 007	6.1	0.000 000	0.003
100 %		+40	1880 000 008	6.8	0.000 000	0.004
100 %		+50	1879 999 996	-4.7	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1879 999 998	-3.5	0.000 000	-0.002

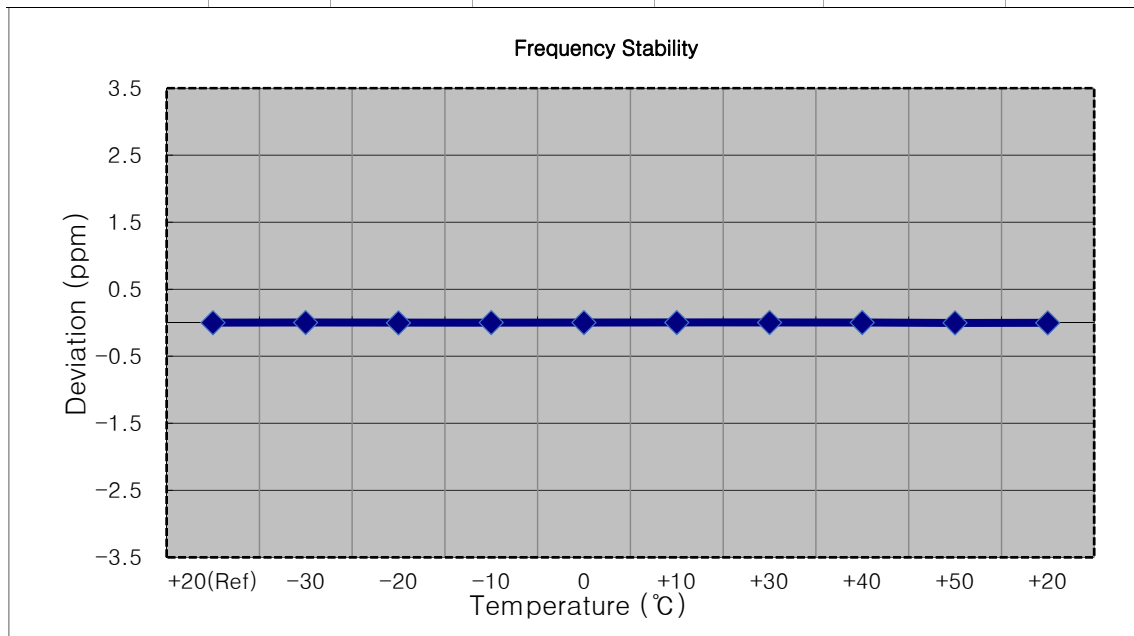


- MODE: LTE B2
- OPERATING FREQUENCY: 1880,000,000 Hz
- CHANNEL: 18900 (20 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1880 000 005	0.0	0.000 000	0.000
100 %		-30	1880 000 010	4.6	0.000 000	0.002
100 %		-20	1880 000 000	-5.2	0.000 000	-0.003
100 %		-10	1879 999 999	-6.4	0.000 000	-0.003
100 %		0	1880 000 010	4.6	0.000 000	0.002
100 %		+10	1880 000 000	-5.3	0.000 000	-0.003
100 %		+30	1880 000 010	5.0	0.000 000	0.003
100 %		+40	1880 000 012	6.2	0.000 000	0.003
100 %		+50	1880 000 000	-5.3	0.000 000	-0.003
Batt. Endpoint	3.400	+20	1880 000 009	3.5	0.000 000	0.002

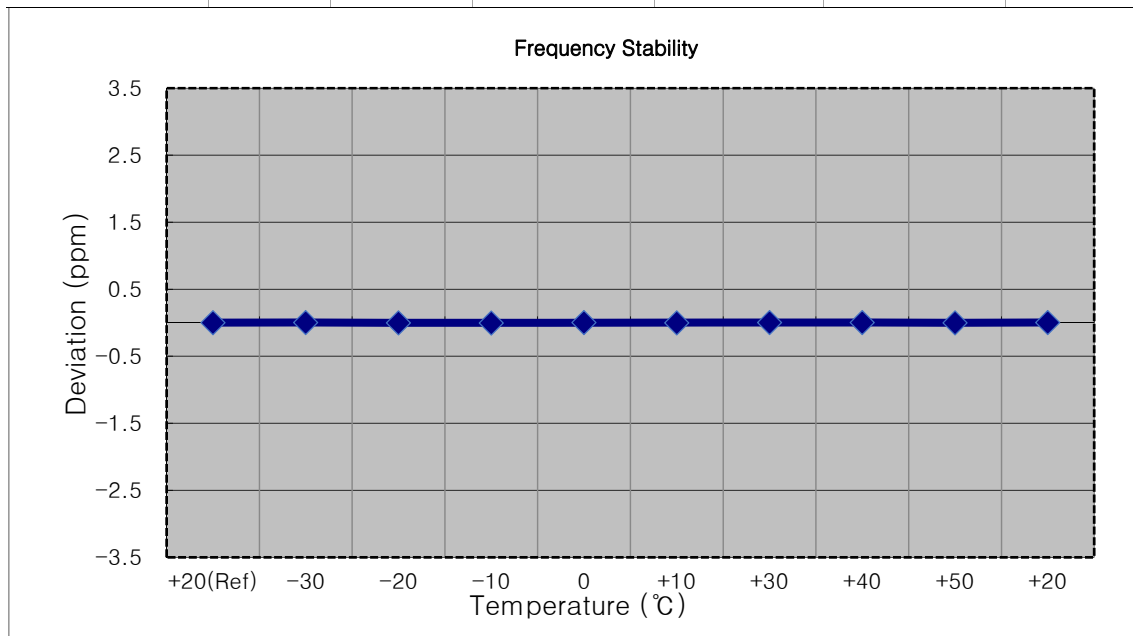


- MODE: LTE B2
- OPERATING FREQUENCY: 1909,300,000 Hz
- CHANNEL: 19193 (1.4 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1909 299 993	0.0	0.000 000	0.000
100 %		-30	1909 299 989	-4.3	0.000 000	-0.002
100 %		-20	1909 299 999	6.1	0.000 000	0.003
100 %		-10	1909 299 998	4.5	0.000 000	0.002
100 %		0	1909 299 989	-4.4	0.000 000	-0.002
100 %		+10	1909 299 988	-5.2	0.000 000	-0.003
100 %		+30	1909 299 988	-5.6	0.000 000	-0.003
100 %		+40	1909 299 988	-5.4	0.000 000	-0.003
100 %		+50	1909 299 999	5.6	0.000 000	0.003
Batt. Endpoint	3.400	+20	1909 299 988	-5.7	0.000 000	-0.003

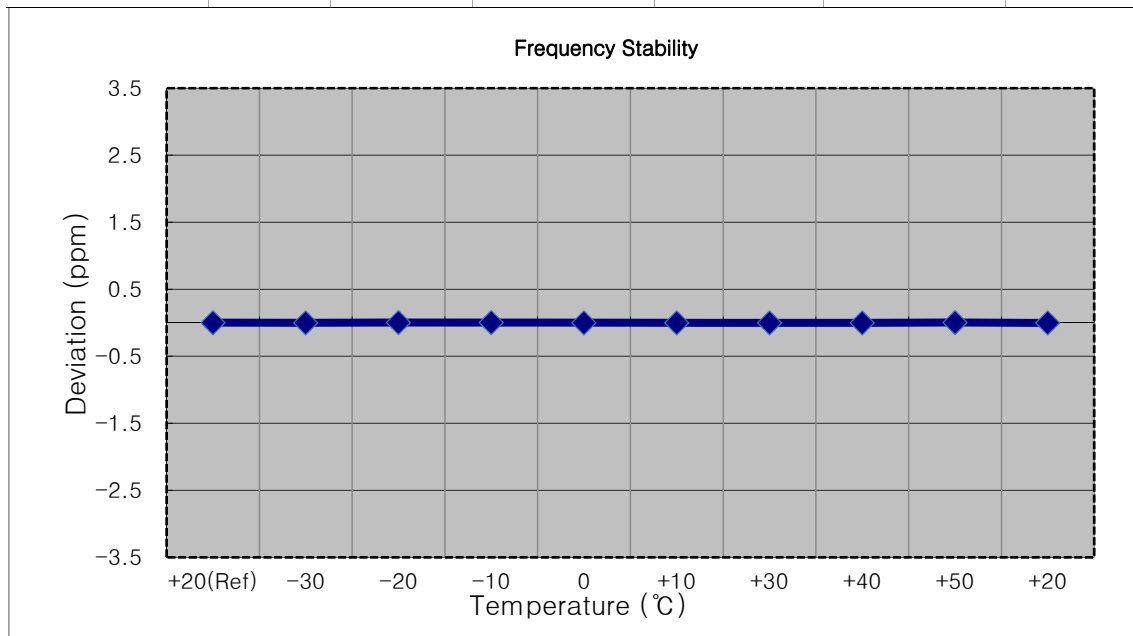


- MODE: LTE B2
- OPERATING FREQUENCY: 1908,500,000 Hz
- CHANNEL: 19185 (3 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1908 500 005	0.0	0.000 000	0.000
100 %		-30	1908 500 012	6.7	0.000 000	0.004
100 %		-20	1908 500 009	4.0	0.000 000	0.002
100 %		-10	1908 500 012	6.8	0.000 000	0.004
100 %		0	1908 500 000	-4.9	0.000 000	-0.003
100 %		+10	1908 500 012	6.6	0.000 000	0.003
100 %		+30	1908 499 998	-7.7	0.000 000	-0.004
100 %		+40	1908 500 013	8.0	0.000 000	0.004
100 %		+50	1908 500 010	4.4	0.000 000	0.002
Batt. Endpoint	3.400	+20	1908 500 011	5.9	0.000 000	0.003

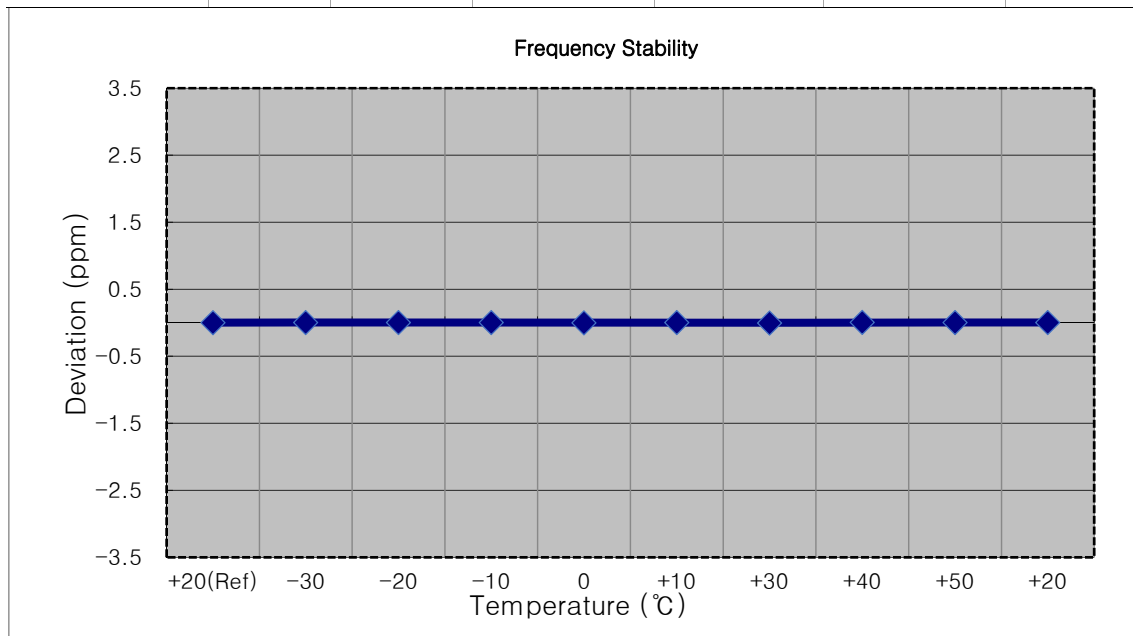


- MODE: LTE B2
- OPERATING FREQUENCY: 1907,500,000 Hz
- CHANNEL: 19175 (5 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1907 499 996	0.0	0.000 000	0.000
100 %		-30	1907 500 000	4.3	0.000 000	0.002
100 %		-20	1907 499 993	-3.3	0.000 000	-0.002
100 %		-10	1907 499 991	-5.1	0.000 000	-0.003
100 %		0	1907 500 000	3.7	0.000 000	0.002
100 %		+10	1907 499 992	-3.8	0.000 000	-0.002
100 %		+30	1907 500 000	4.6	0.000 000	0.002
100 %		+40	1907 499 991	-4.6	0.000 000	-0.002
100 %		+50	1907 500 001	5.0	0.000 000	0.003
Batt. Endpoint	3.400	+20	1907 499 992	-4.0	0.000 000	-0.002

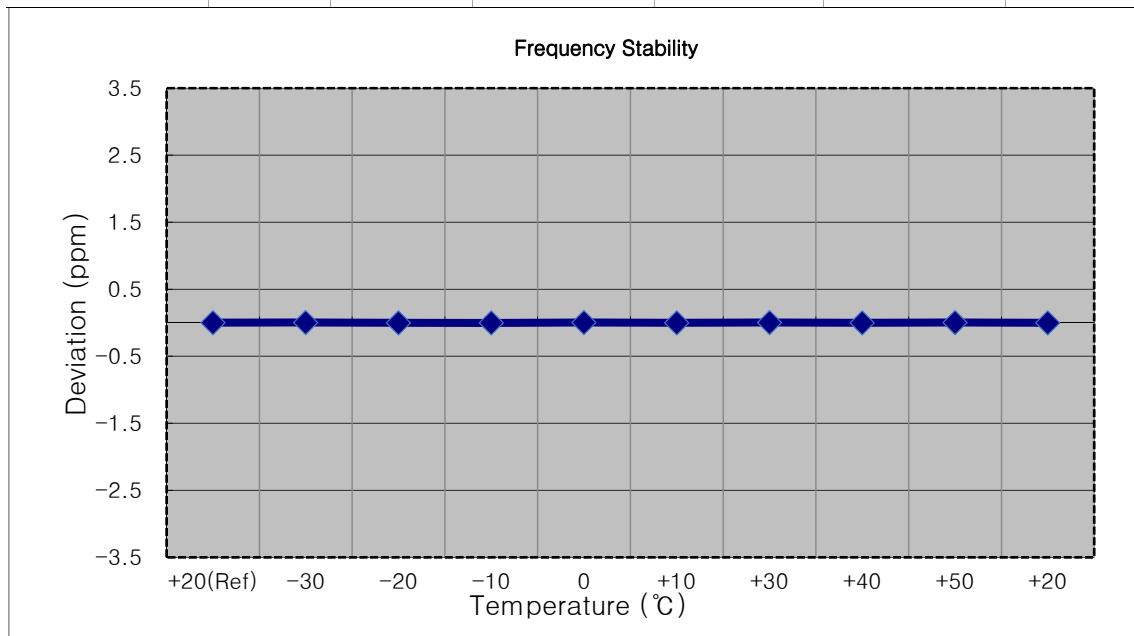


- MODE: LTE B2
- OPERATING FREQUENCY: 1905,000,000 Hz
- CHANNEL: 19150 (10 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1904 999 997	0.0	0.000 000	0.000
100 %		-30	1904 999 994	-2.8	0.000 000	-0.001
100 %		-20	1904 999 994	-3.1	0.000 000	-0.002
100 %		-10	1905 000 001	4.2	0.000 000	0.002
100 %		0	1904 999 993	-3.9	0.000 000	-0.002
100 %		+10	1904 999 992	-4.8	0.000 000	-0.003
100 %		+30	1904 999 991	-6.0	0.000 000	-0.003
100 %		+40	1905 000 002	5.1	0.000 000	0.003
100 %		+50	1904 999 999	2.8	0.000 000	0.001
Batt. Endpoint	3.400	+20	1905 000 000	3.1	0.000 000	0.002

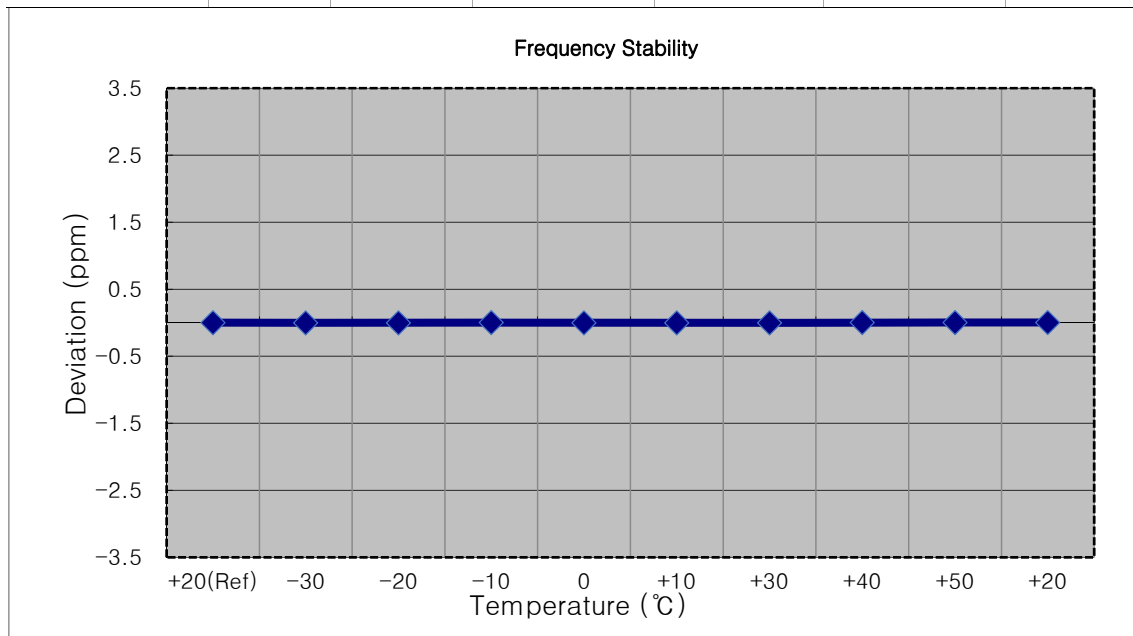


- MODE: LTE B2
- OPERATING FREQUENCY: 1902,500,000 Hz
- CHANNEL: 19125 (15 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1902 500 004	0.0	0.000 000	0.000
100 %		-30	1902 500 010	5.7	0.000 000	0.003
100 %		-20	1902 500 000	-3.7	0.000 000	-0.002
100 %		-10	1902 500 011	7.0	0.000 000	0.004
100 %		0	1902 499 997	-6.8	0.000 000	-0.004
100 %		+10	1902 500 009	4.7	0.000 000	0.002
100 %		+30	1902 500 008	4.0	0.000 000	0.002
100 %		+40	1902 500 009	5.1	0.000 000	0.003
100 %		+50	1902 500 010	5.6	0.000 000	0.003
Batt. Endpoint	3.400	+20	1902 500 000	-4.3	0.000 000	-0.002

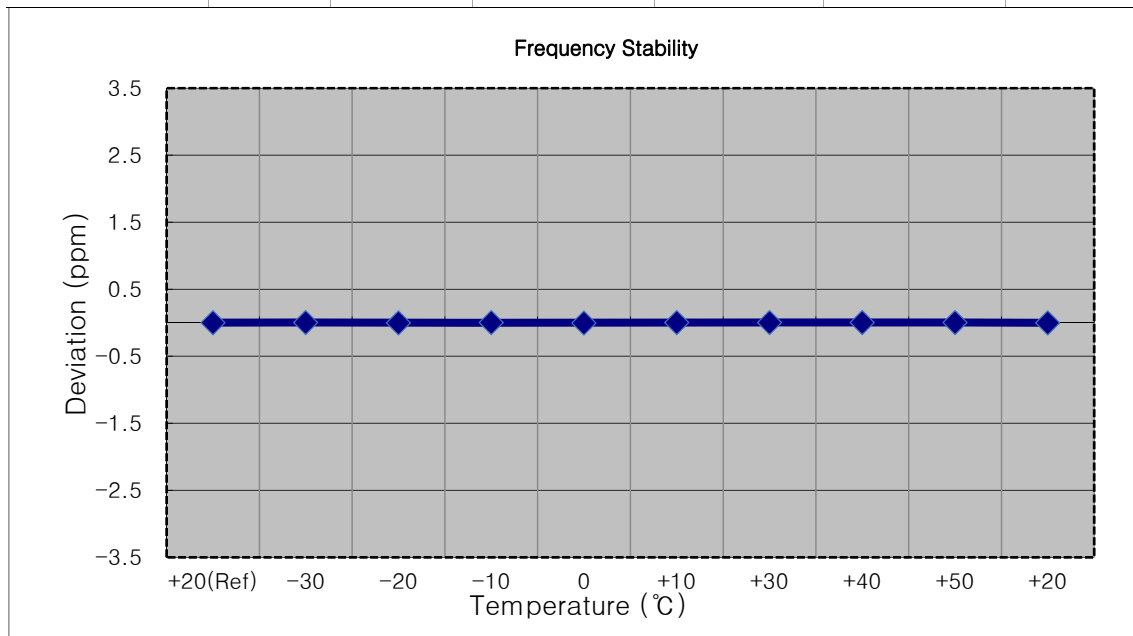


- MODE: LTE B2
- OPERATING FREQUENCY: 1900,000,000 Hz
- CHANNEL: 19100 (20 MHz)
- REFERENCE VOLTAGE: 3.860 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1899 999 996	0.0	0.000 000	0.000
100 %		-30	1899 999 999	3.3	0.000 000	0.002
100 %		-20	1899 999 990	-5.7	0.000 000	-0.003
100 %		-10	1899 999 993	-3.0	0.000 000	-0.002
100 %		0	1900 000 001	5.3	0.000 000	0.003
100 %		+10	1900 000 000	4.8	0.000 000	0.003
100 %		+30	1899 999 999	3.8	0.000 000	0.002
100 %		+40	1900 000 000	4.0	0.000 000	0.002
100 %		+50	1899 999 998	2.7	0.000 000	0.001
Batt. Endpoint	3.400	+20	1899 999 999	3.8	0.000 000	0.002

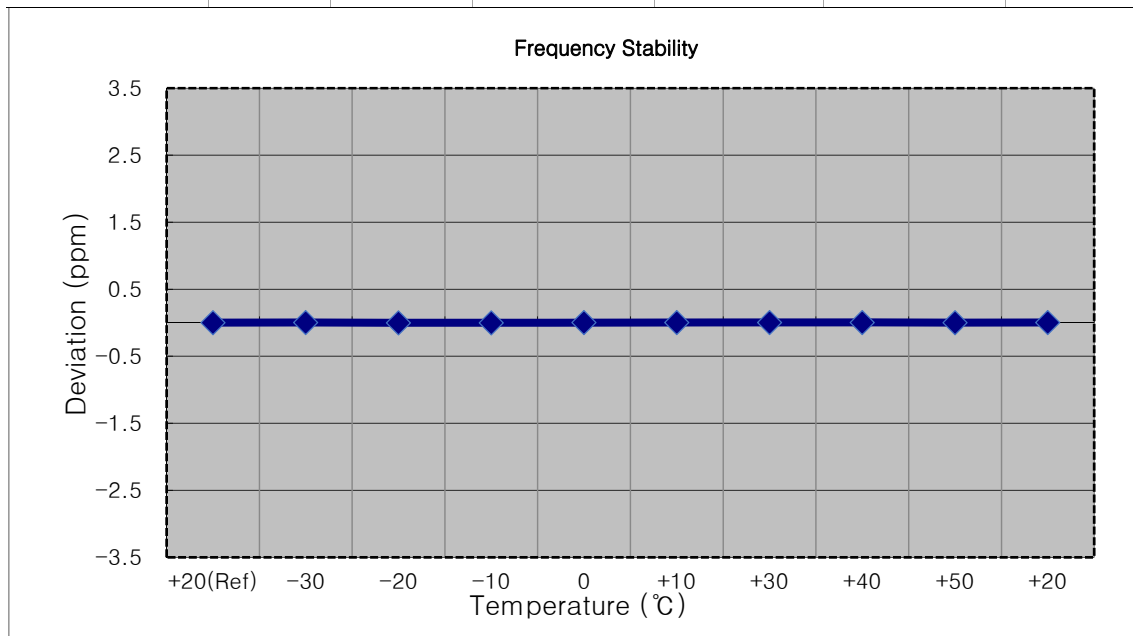


10. TEST PLOTS(Main 1 ANT)


LTE B2_1.4M_PAR_Mid_QPSK_FullRB

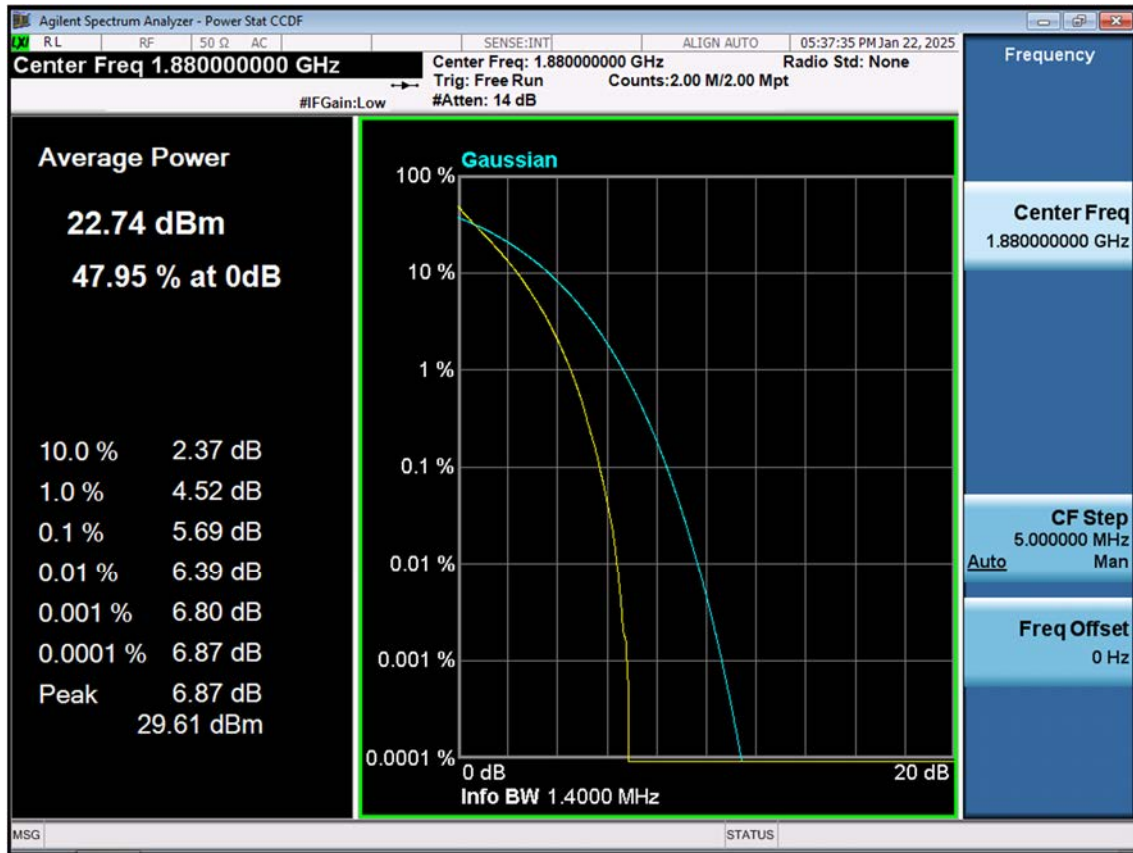


LTE B2_1.4M_PAR_Mid_16QAM_FullRB

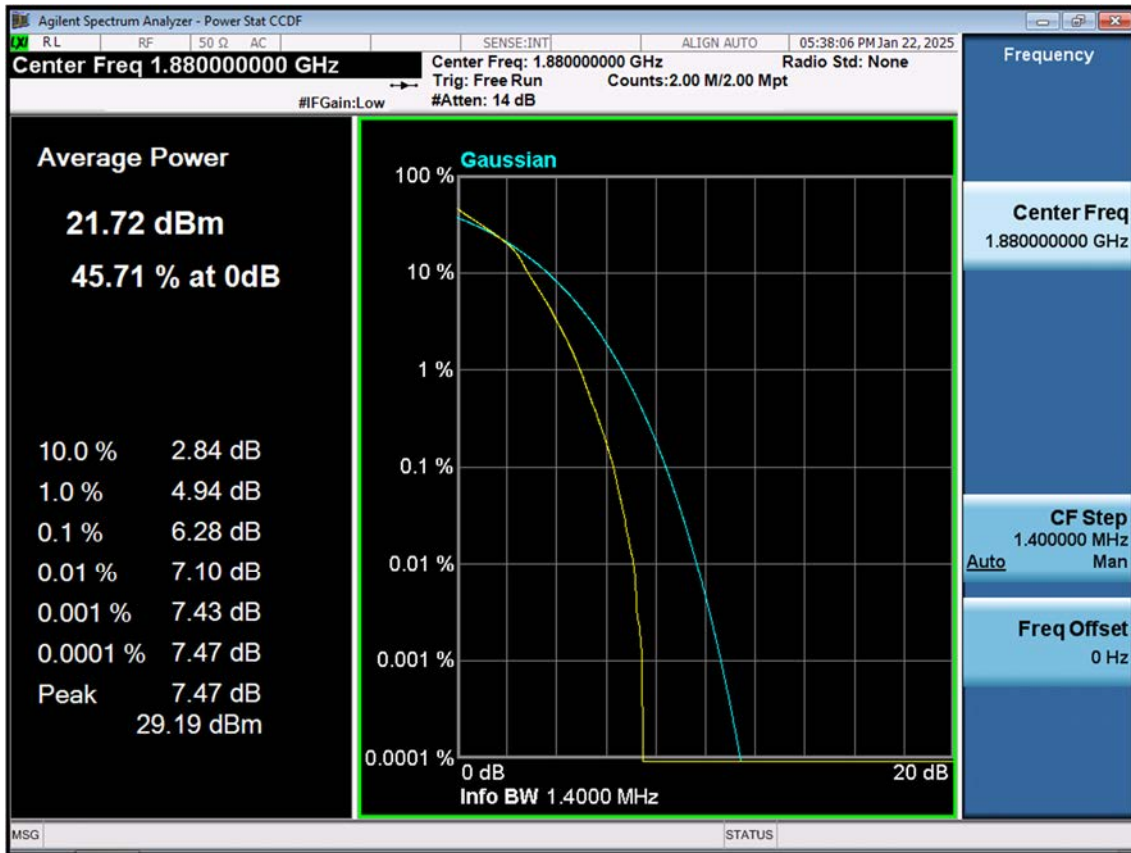


LTE B2_1.4M_PAR_Mid_64QAM_FullRB

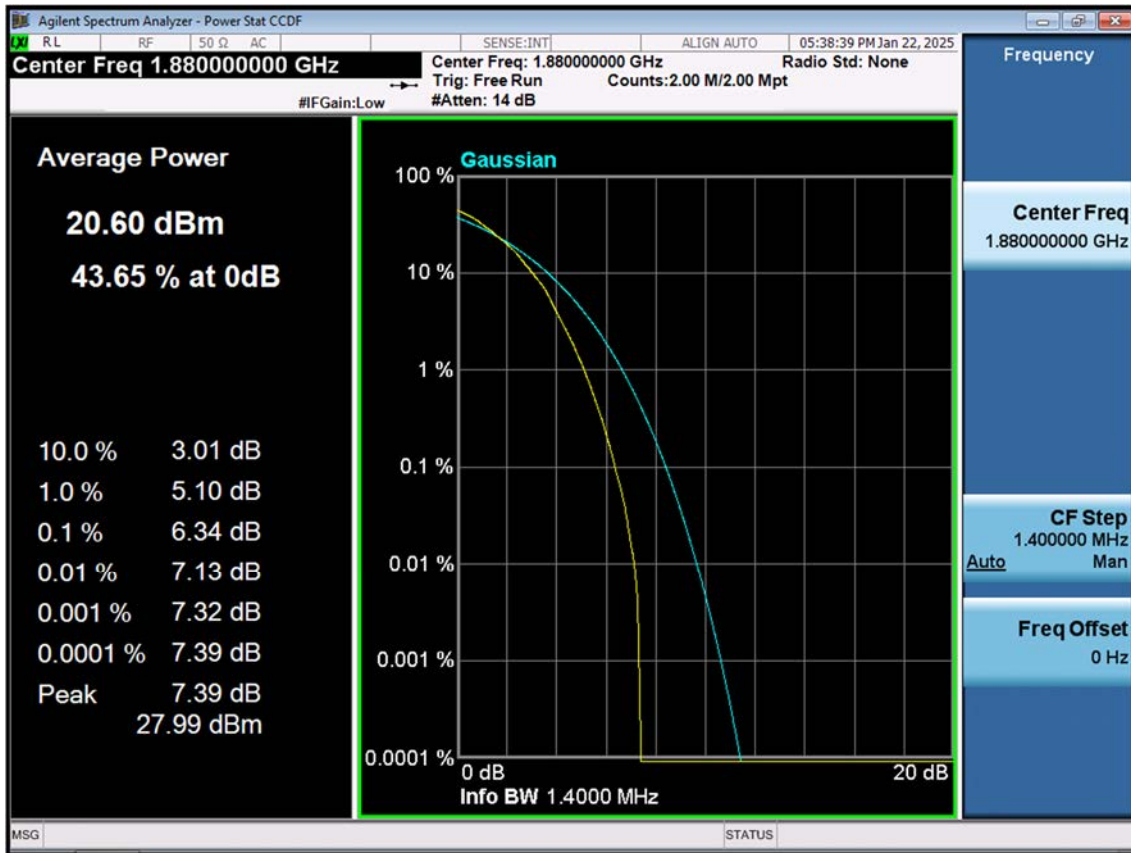


LTE B2_1.4M_PAR_Mid_256QAM_FullRB

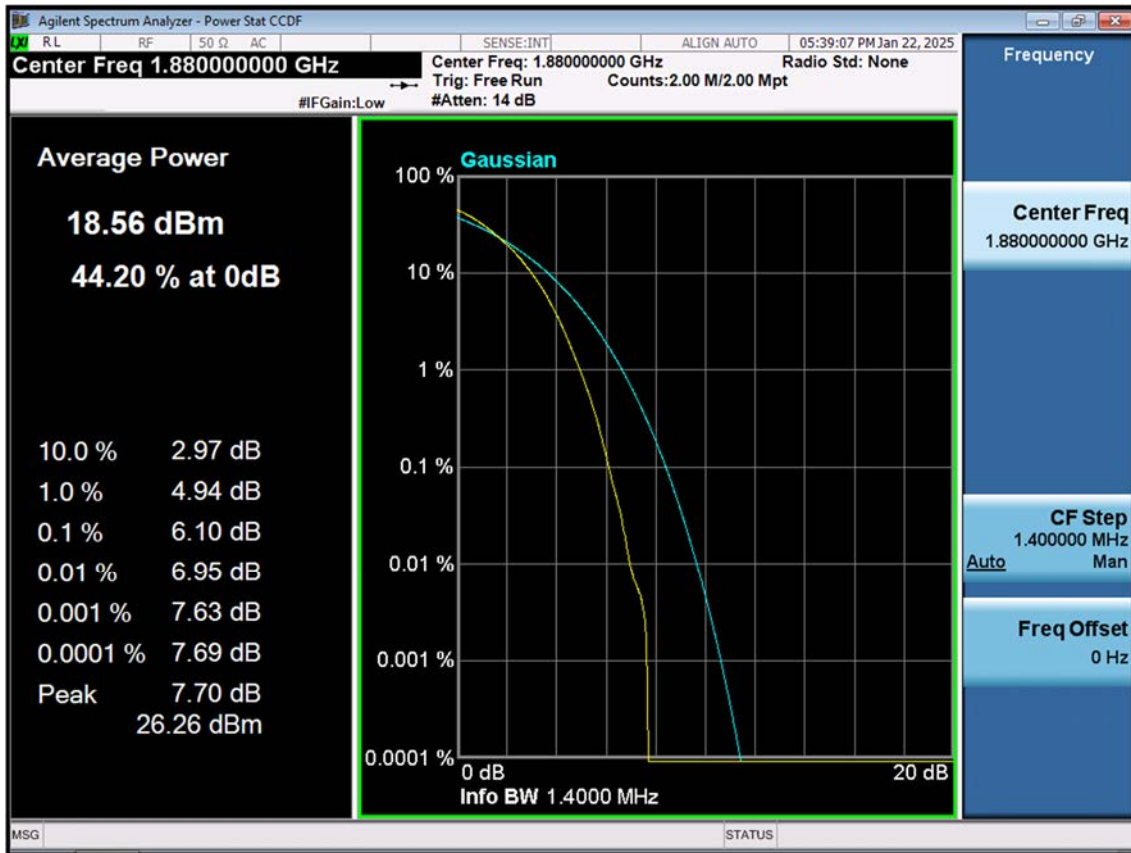


LTE B2_3 M_PAR_Mid_QPSK_FullRB

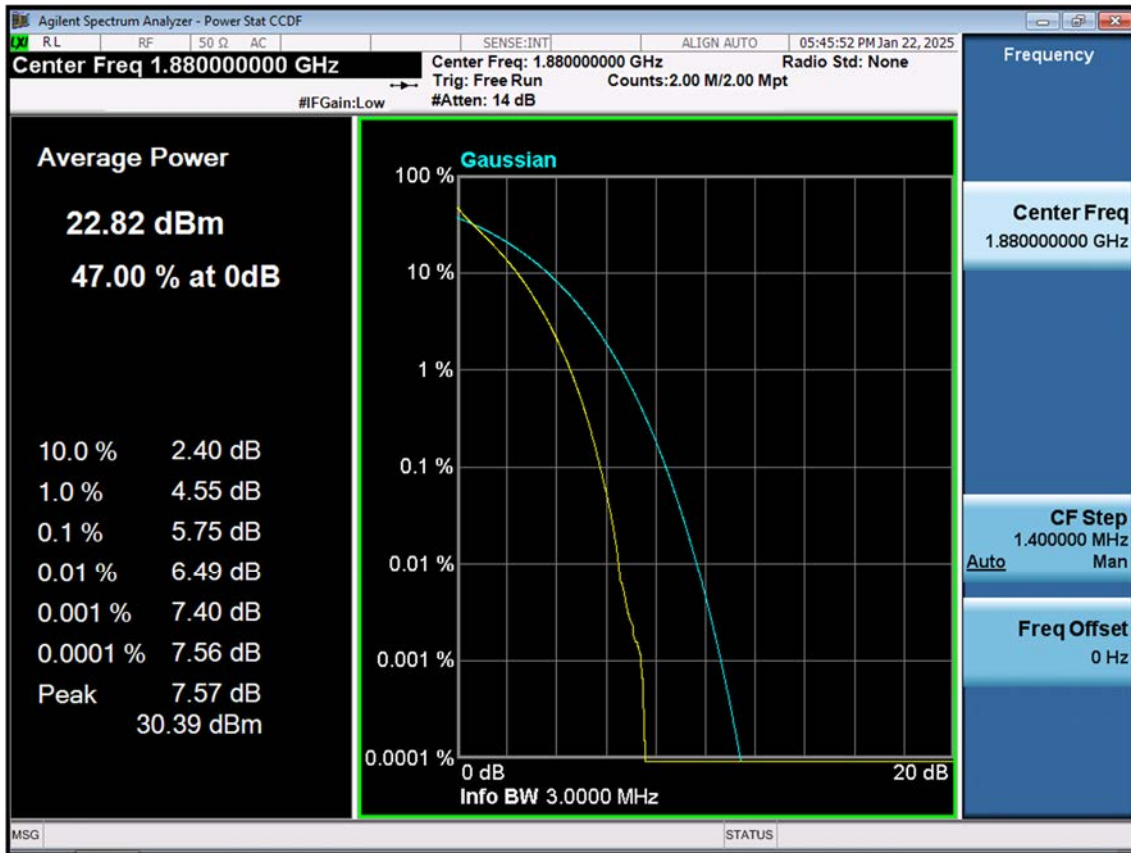


LTE B2_3 M_PAR_Mid_16QAM_FullRB

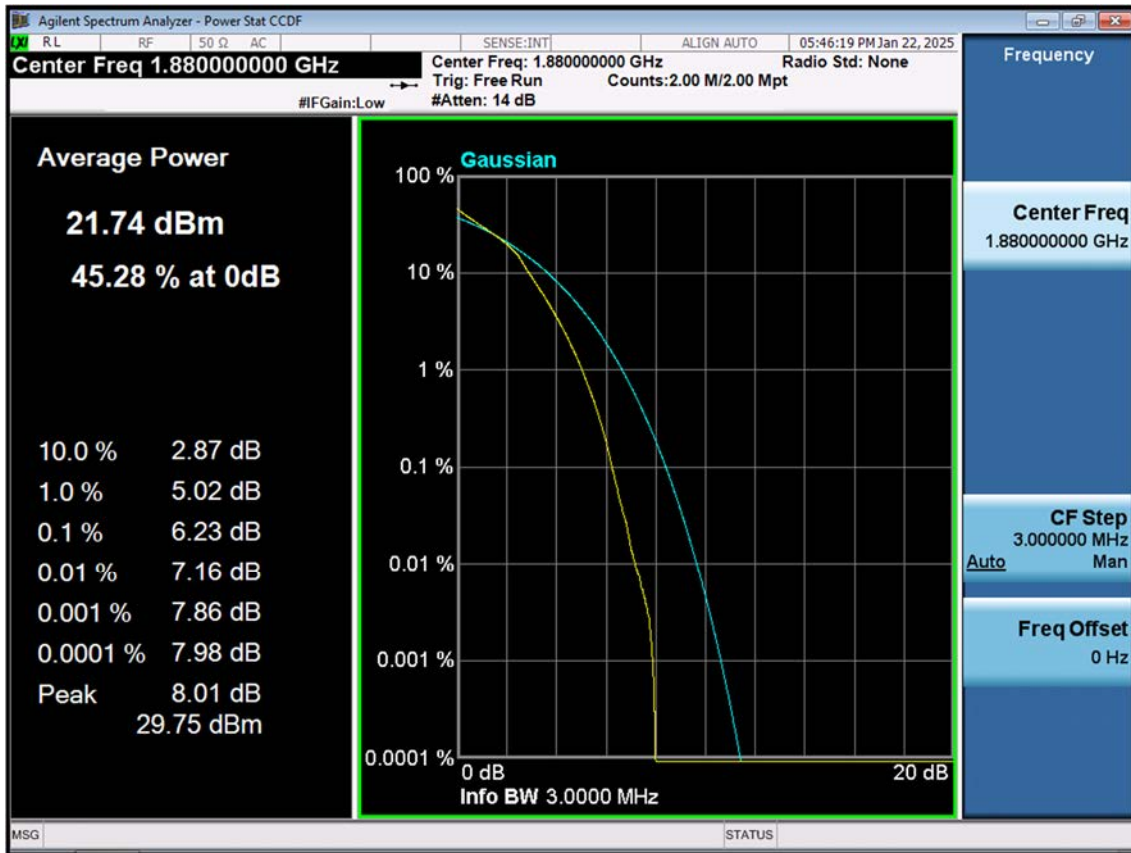


LTE B2_3 M_PAR_Mid_64QAM_FullRB

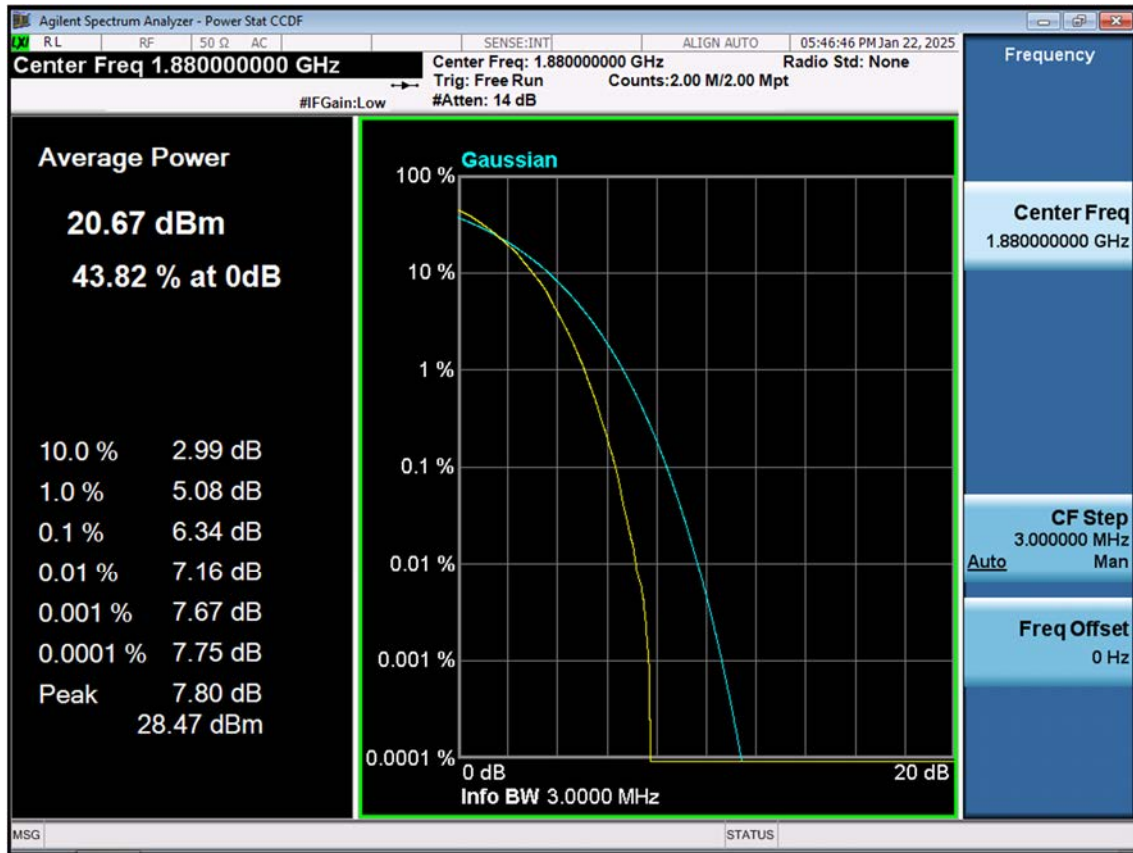


LTE B2_3 M_PAR_Mid_256QAM_FullRB

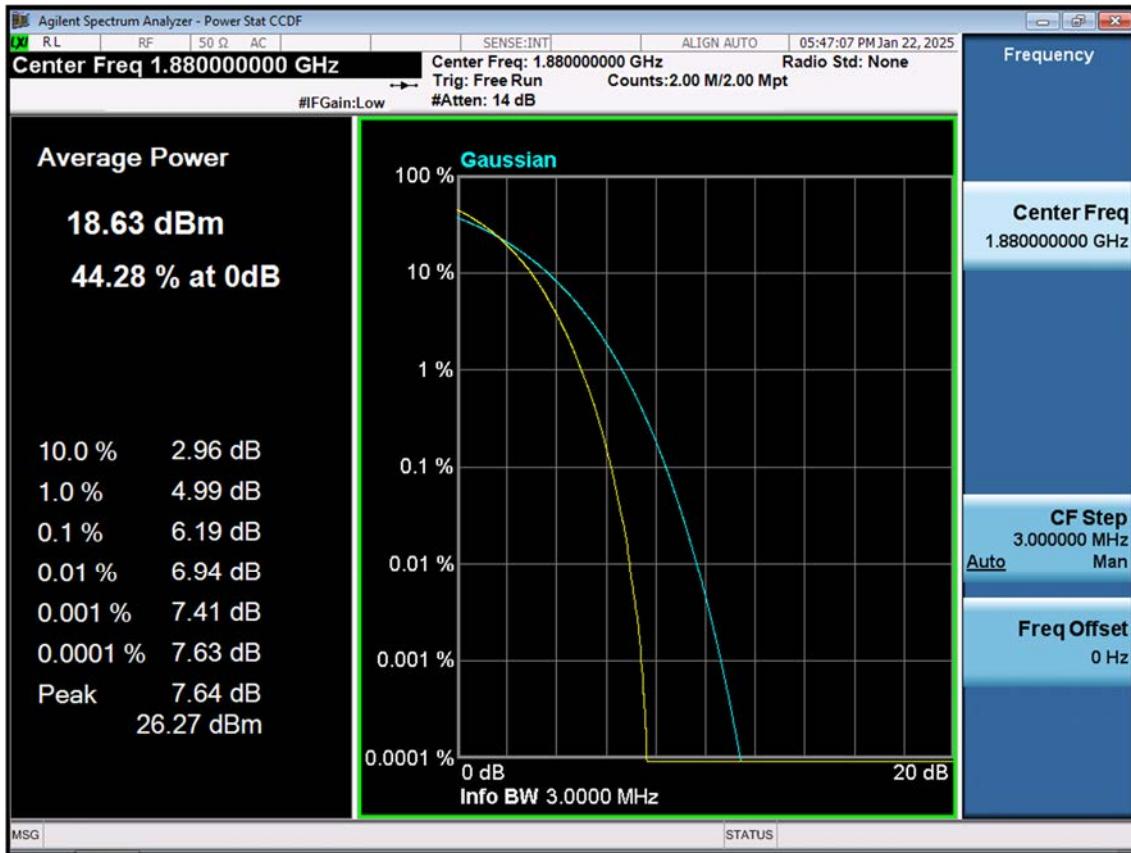


LTE B2_5 M_PAR_Mid_QPSK_FullRB

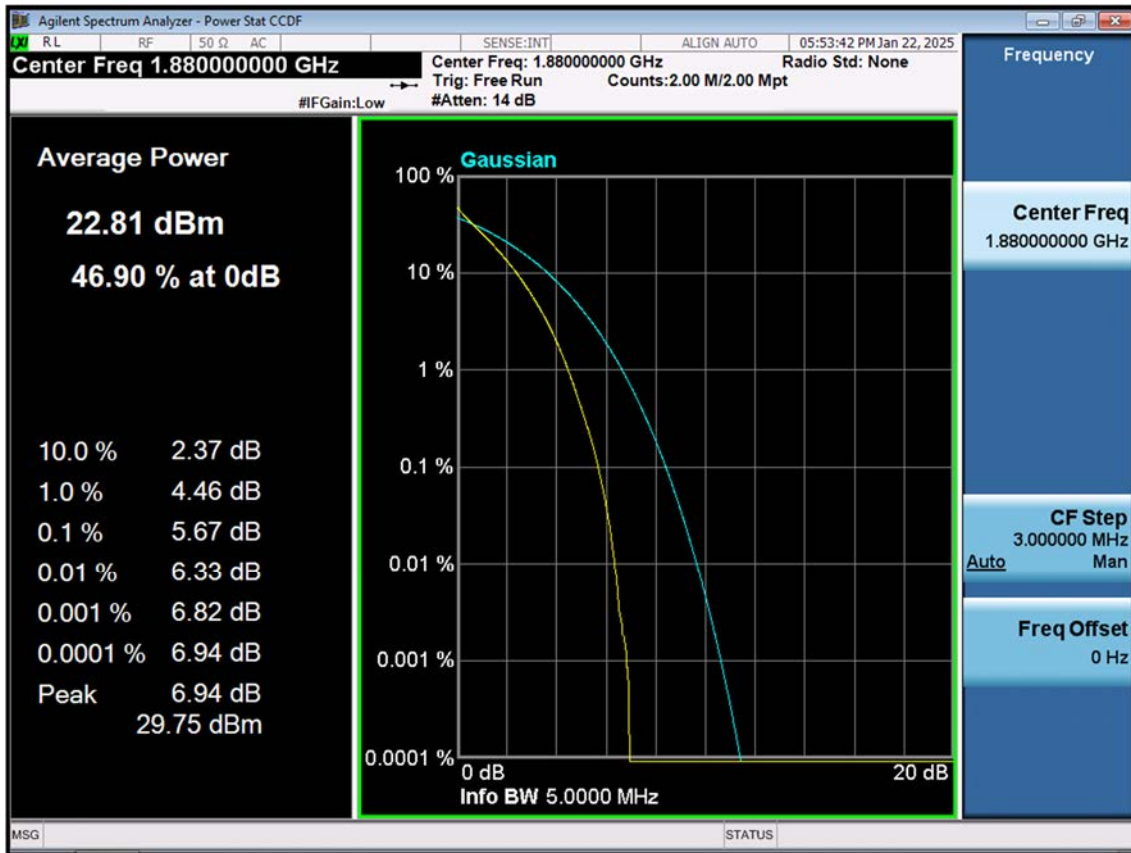


LTE B2_5 M_PAR_Mid_16QAM_FullRB

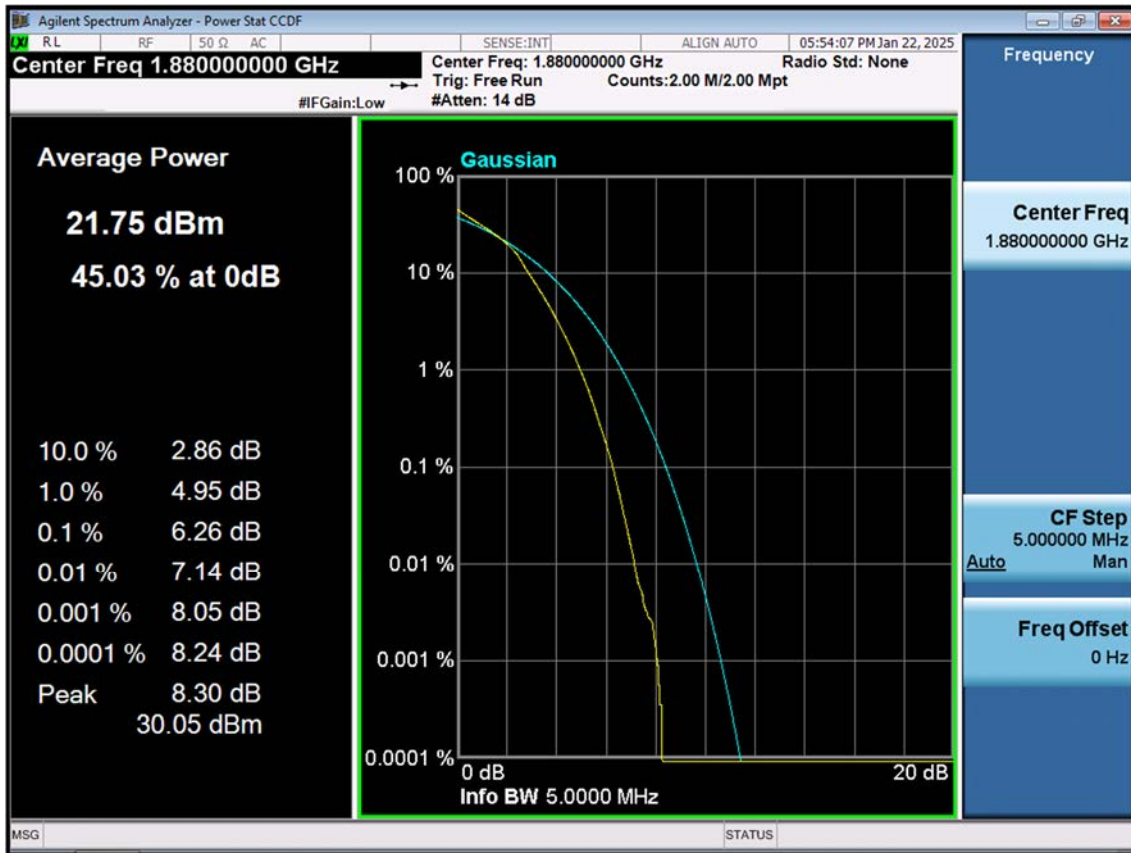


LTE B2_5 M_PAR_Mid_64QAM_FullRB

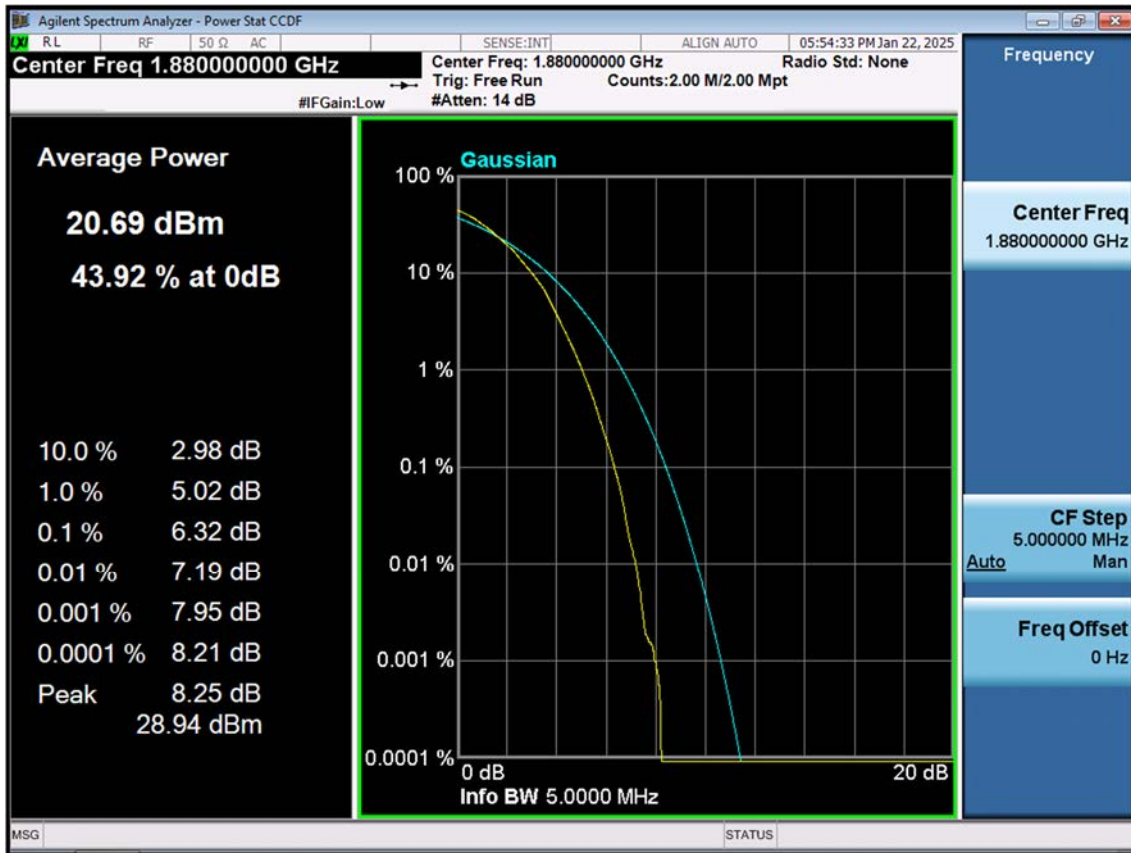


LTE B2_5 M_PAR_Mid_256QAM_FullRB

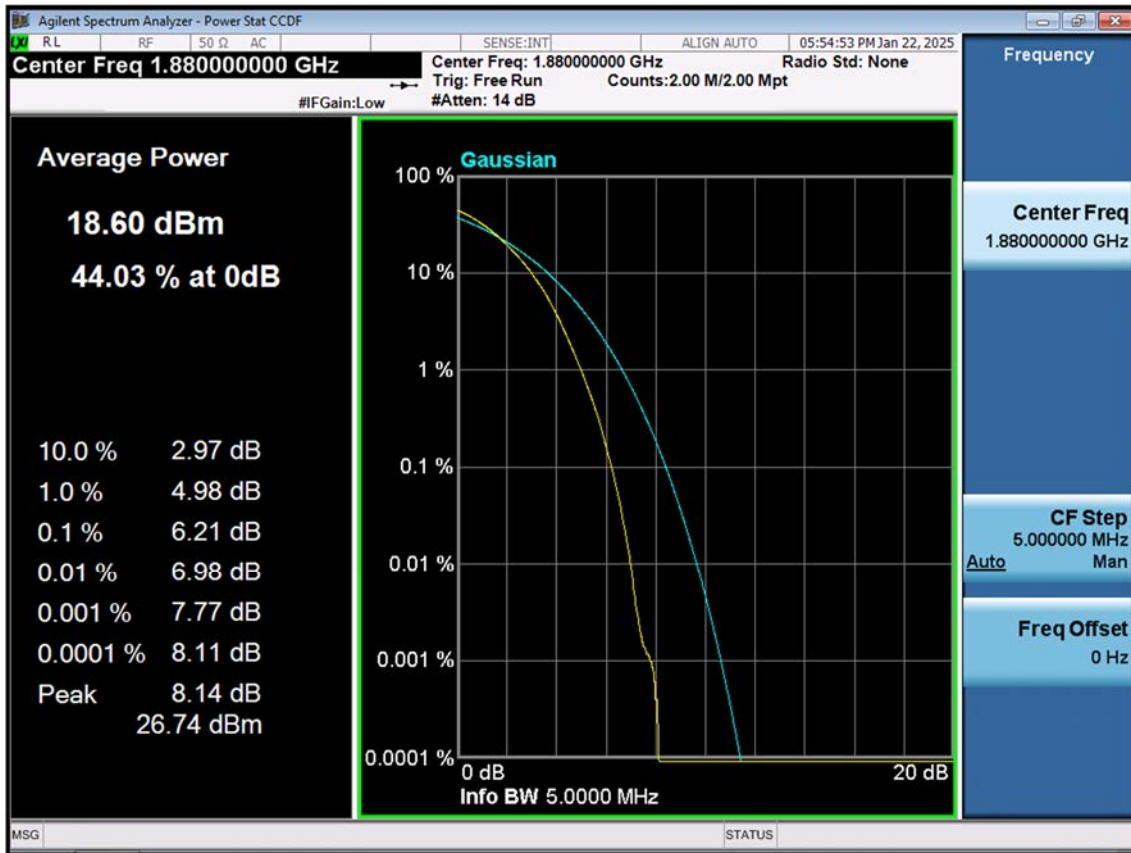


LTE B2_10 M_PAR_Mid_QPSK_FullRB

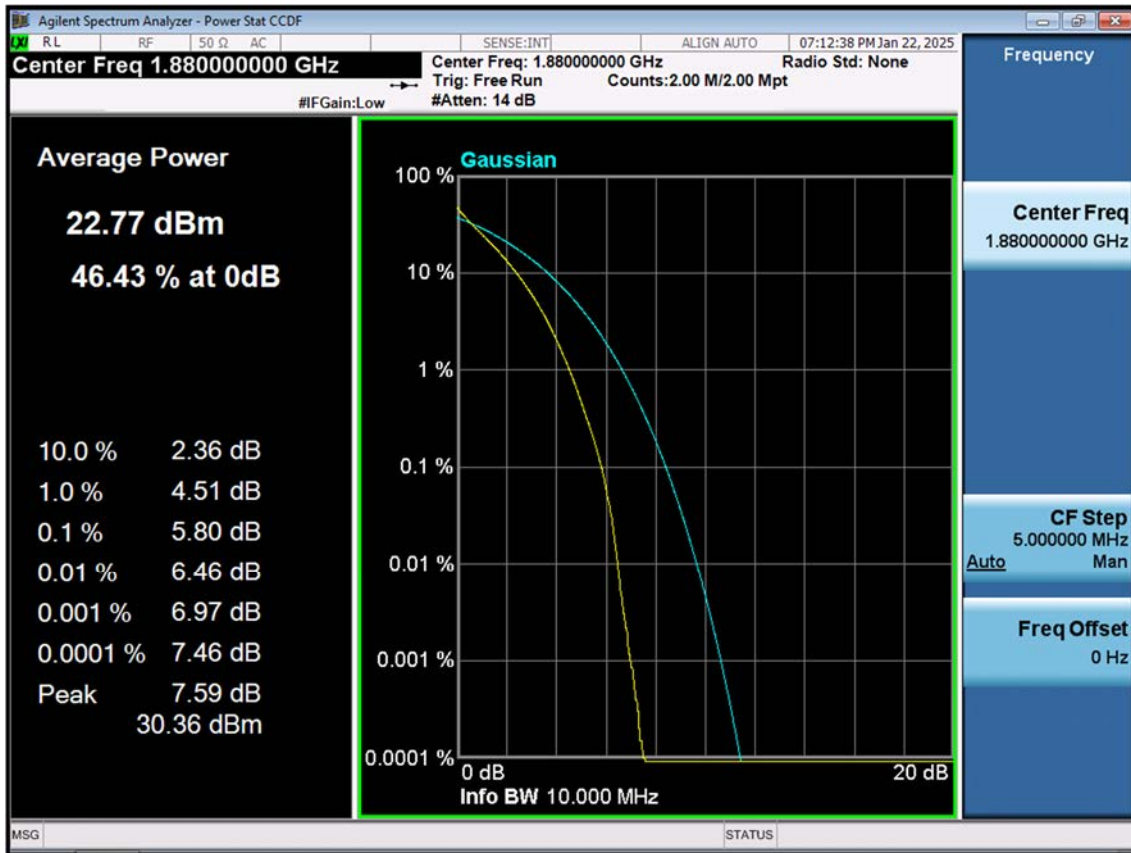


LTE B2_10 M_PAR_Mid_16QAM_FullRB

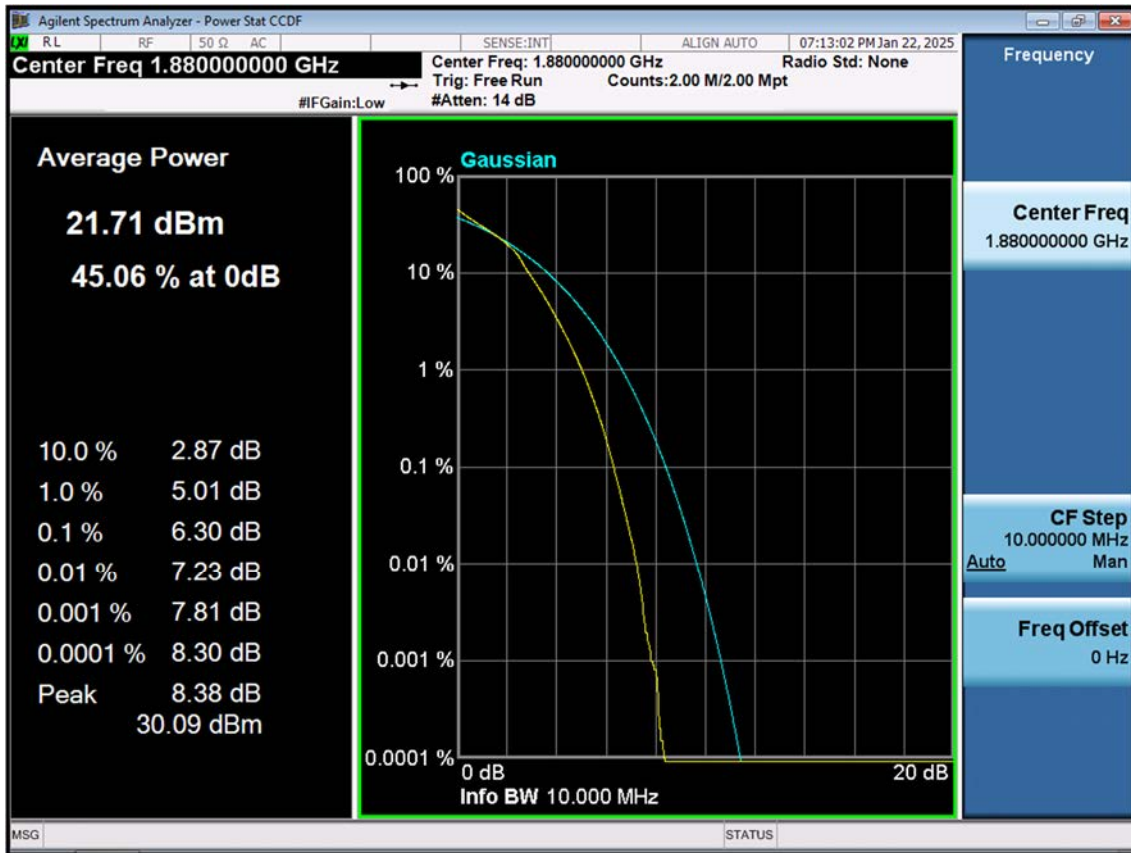


LTE B2_10 M_PAR_Mid_64QAM_FullRB

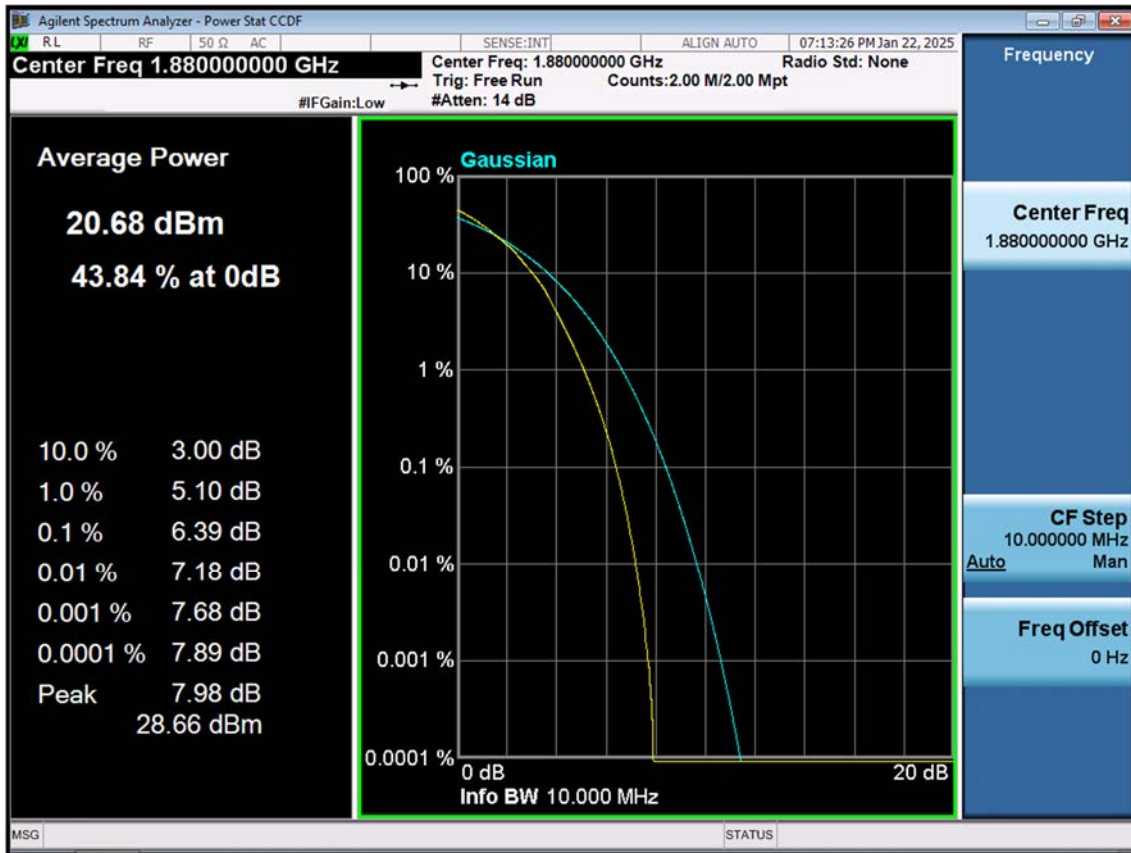


LTE B2_10 M_PAR_Mid_256QAM_FullRB

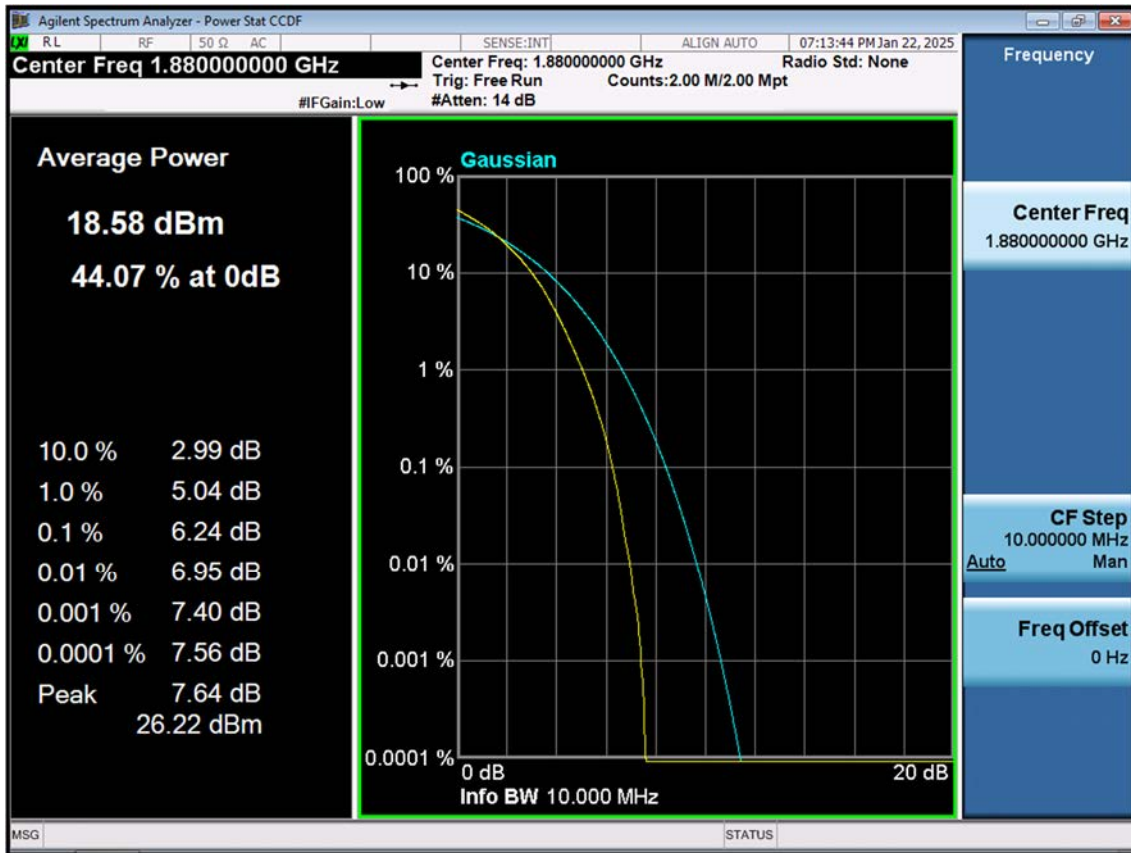


LTE B2_15 M_PAR_Mid_QPSK_FullRB

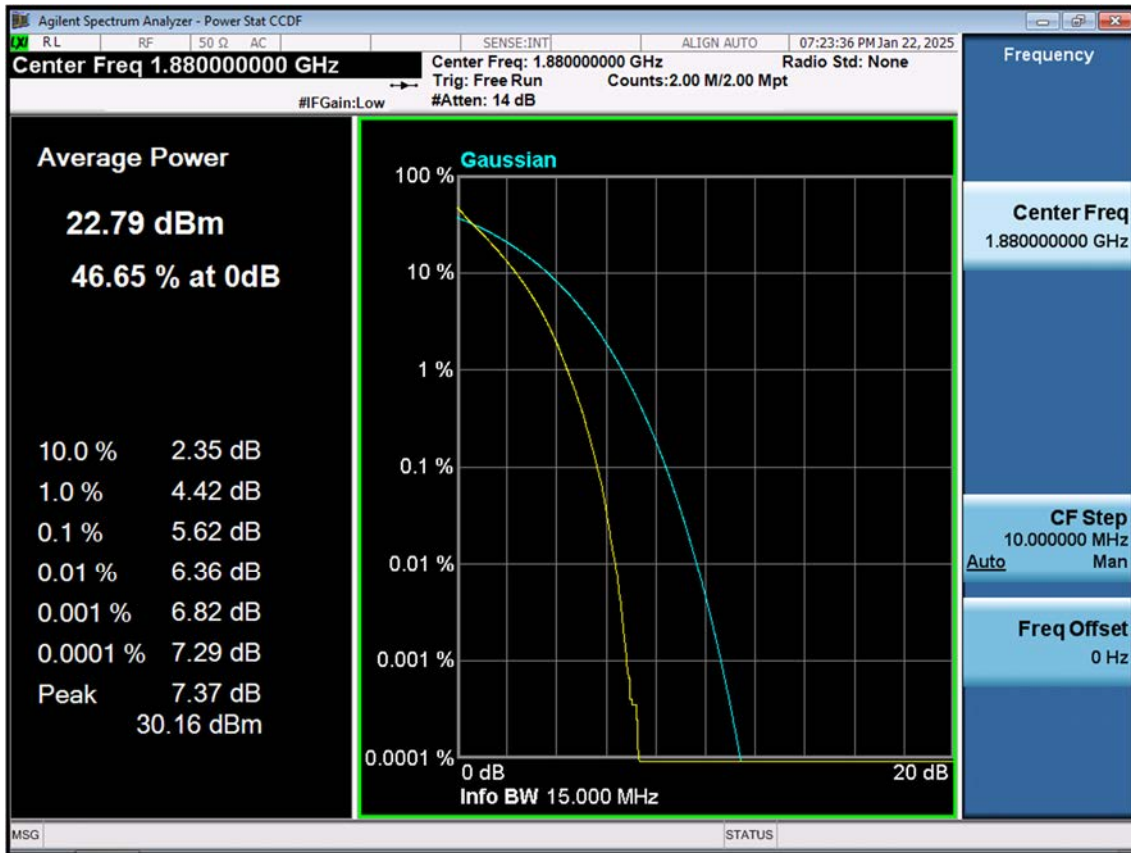


LTE B2_15 M_PAR_Mid_16QAM_FullRB

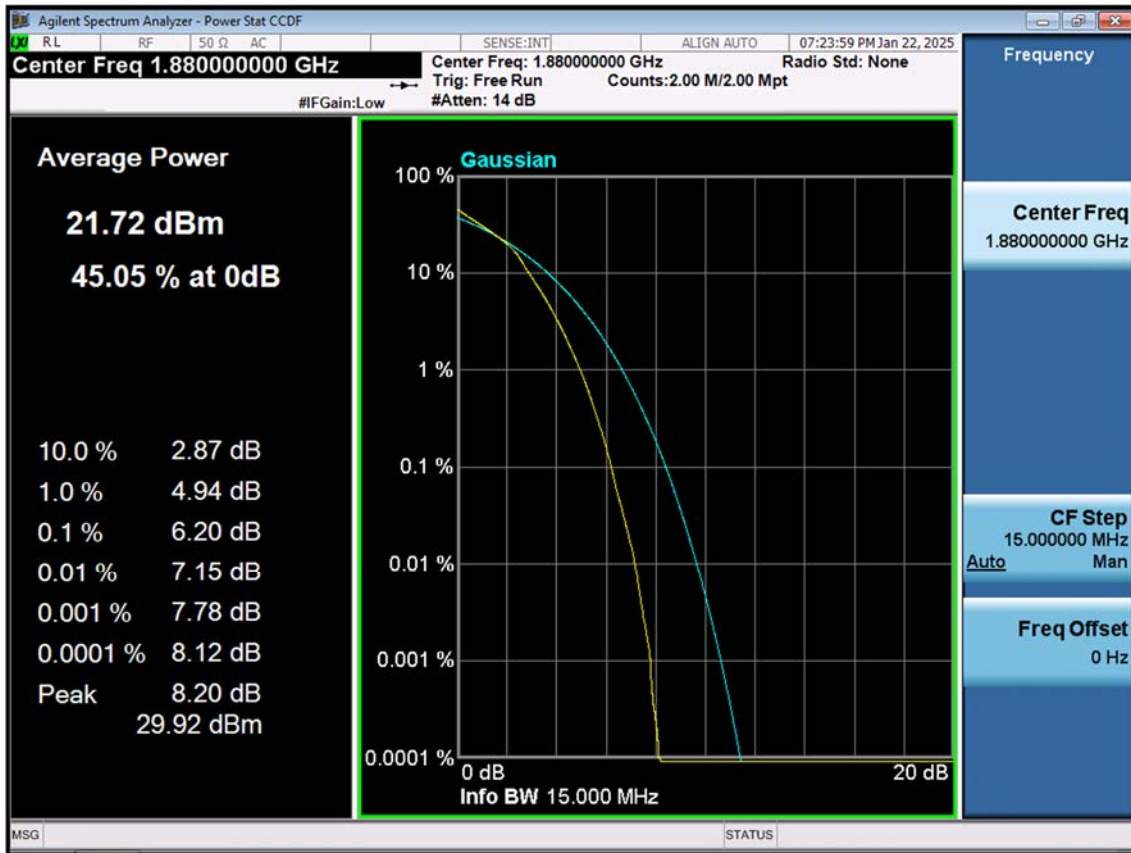


LTE B2_15 M_PAR_Mid_64QAM_FullRB

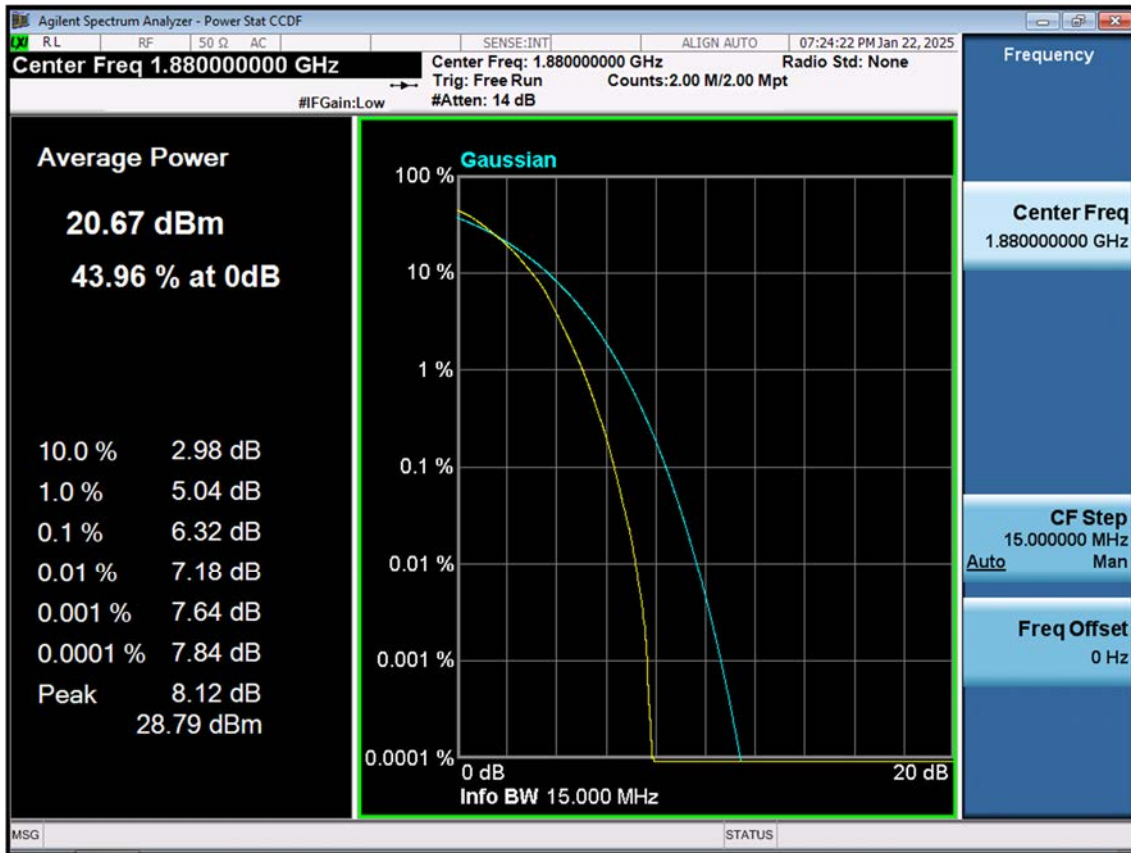


LTE B2_15 M_PAR_Mid_256QAM_FullRB

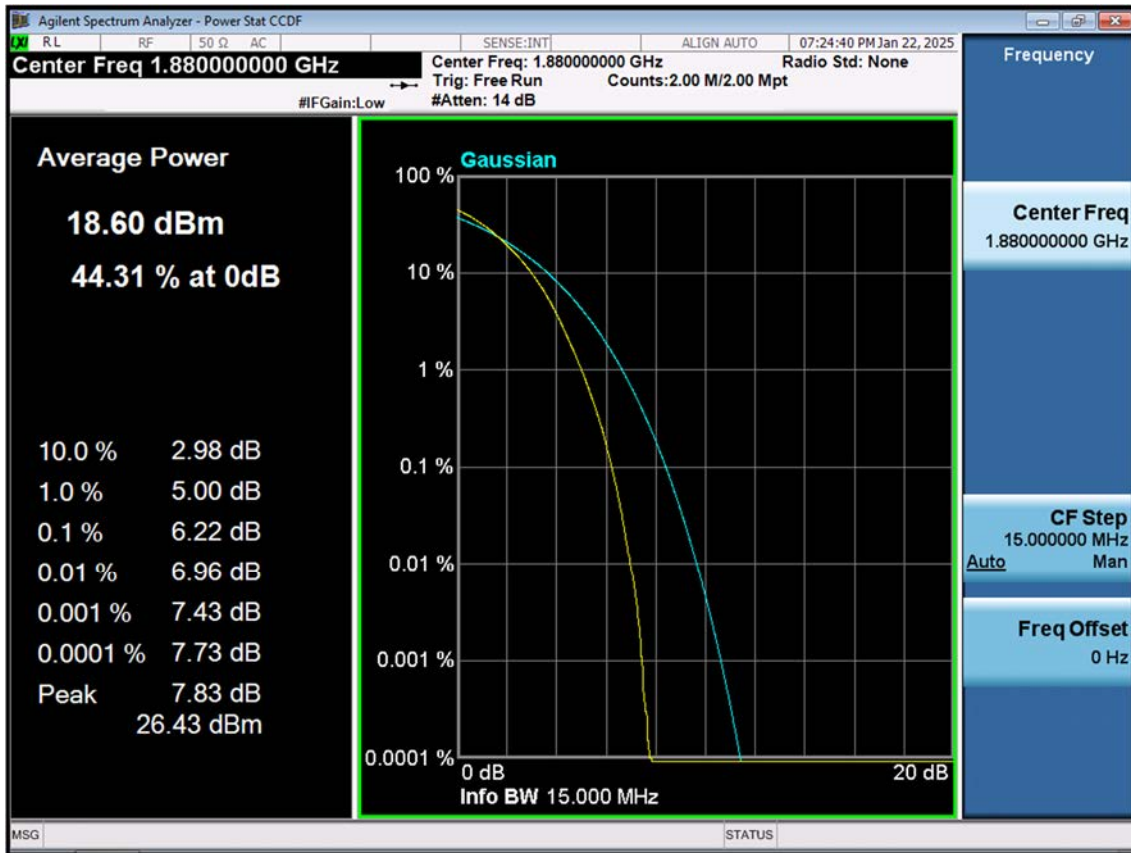


LTE B2_20 M_PAR_Mid_QPSK_FullRB

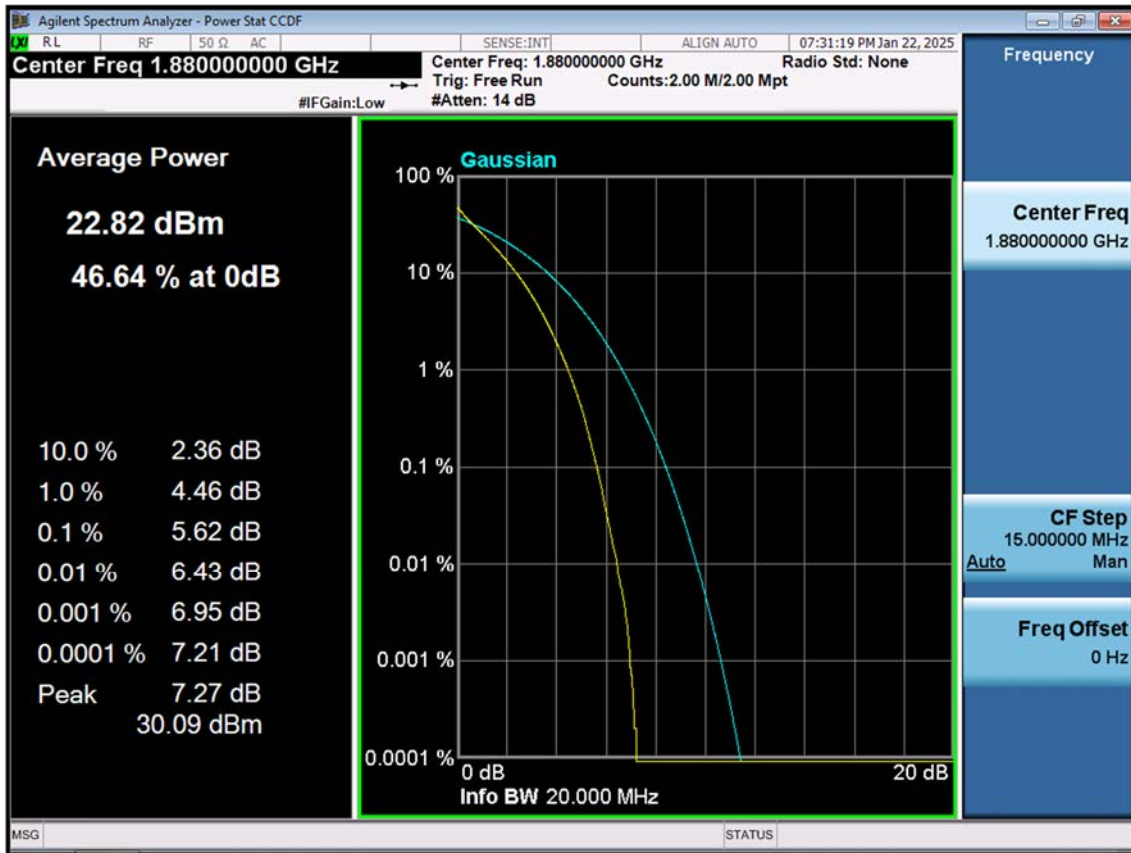


LTE B2_20 M_PAR_Mid_16QAM_FullRB

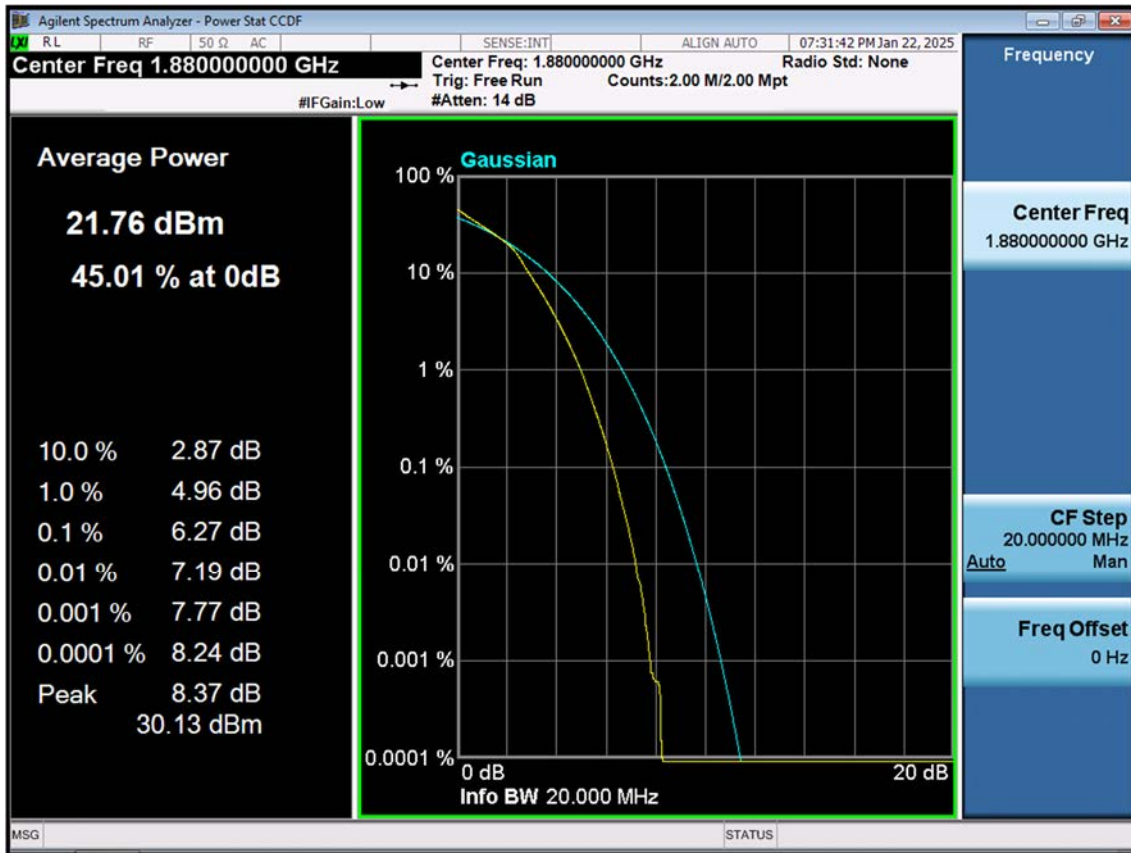


LTE B2_20 M_PAR_Mid_64QAM_FullRB

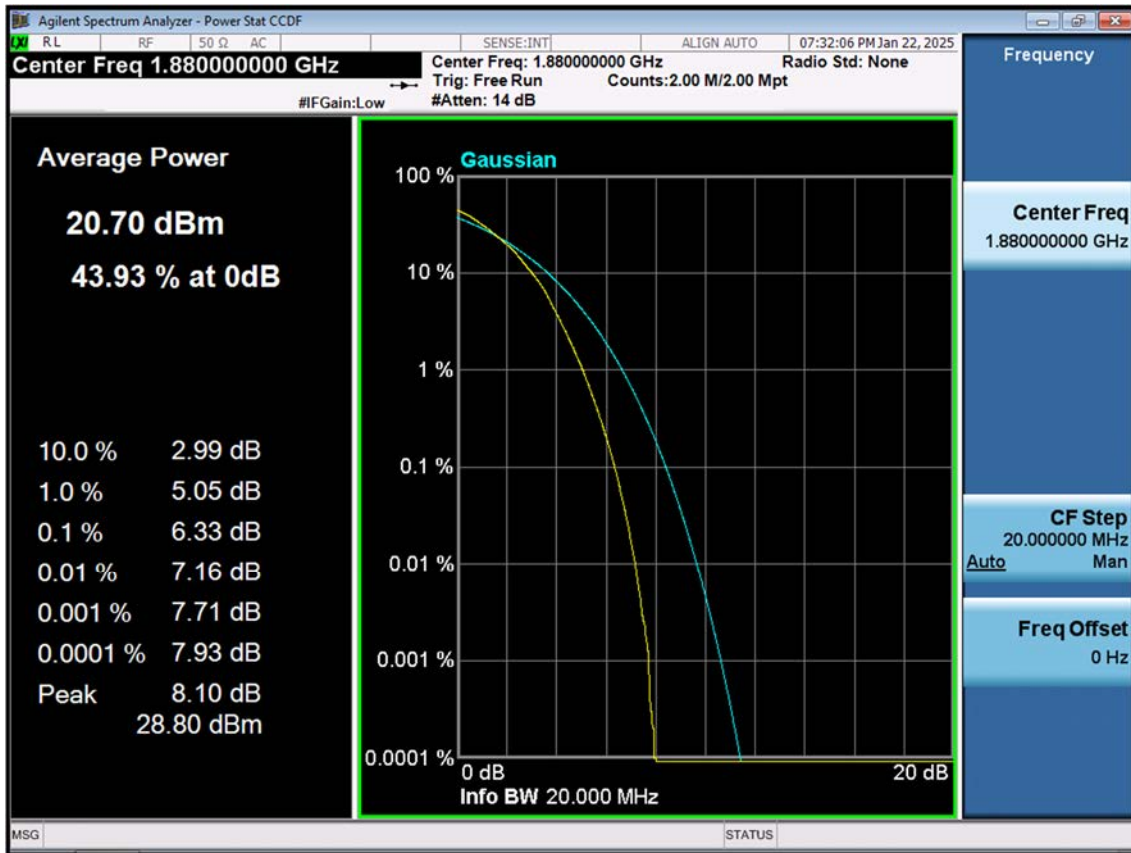


LTE B2_20 M_PAR_Mid_256QAM_FullRB

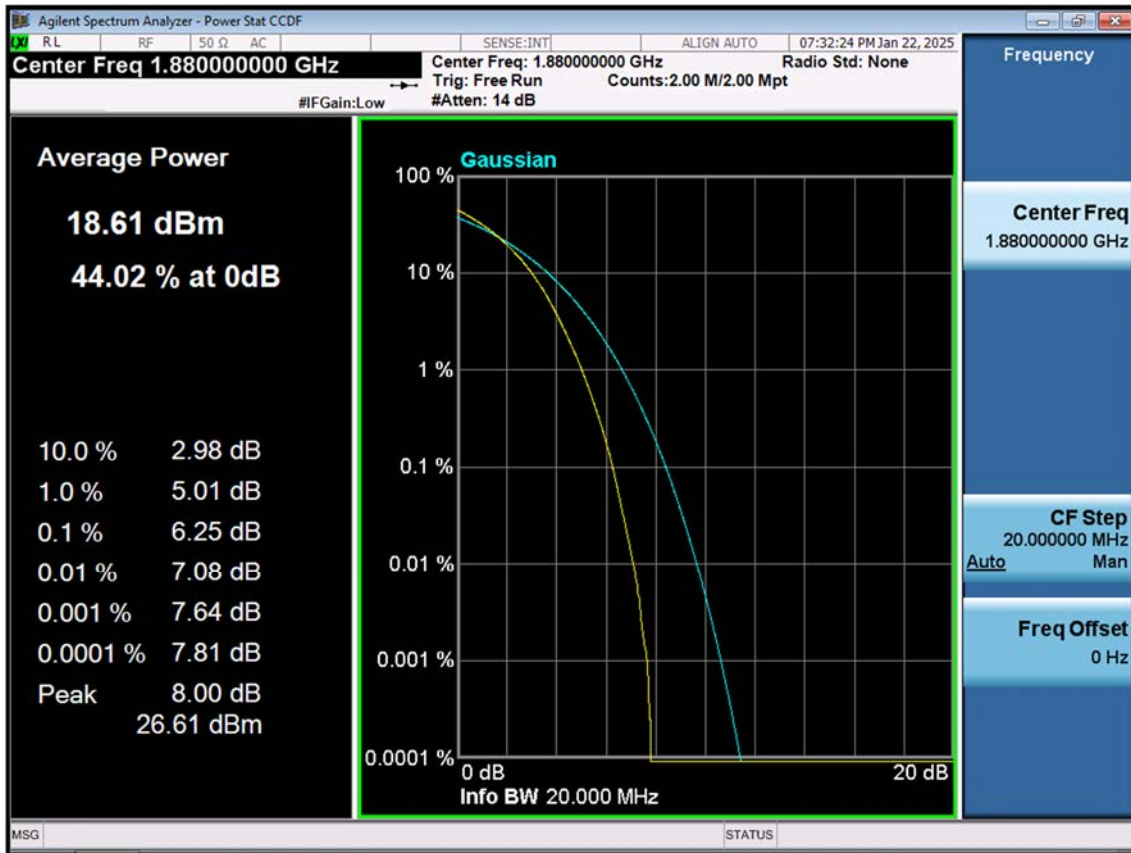


LTE B2_1.4M_OBW_Mid_QPSK_FullRB

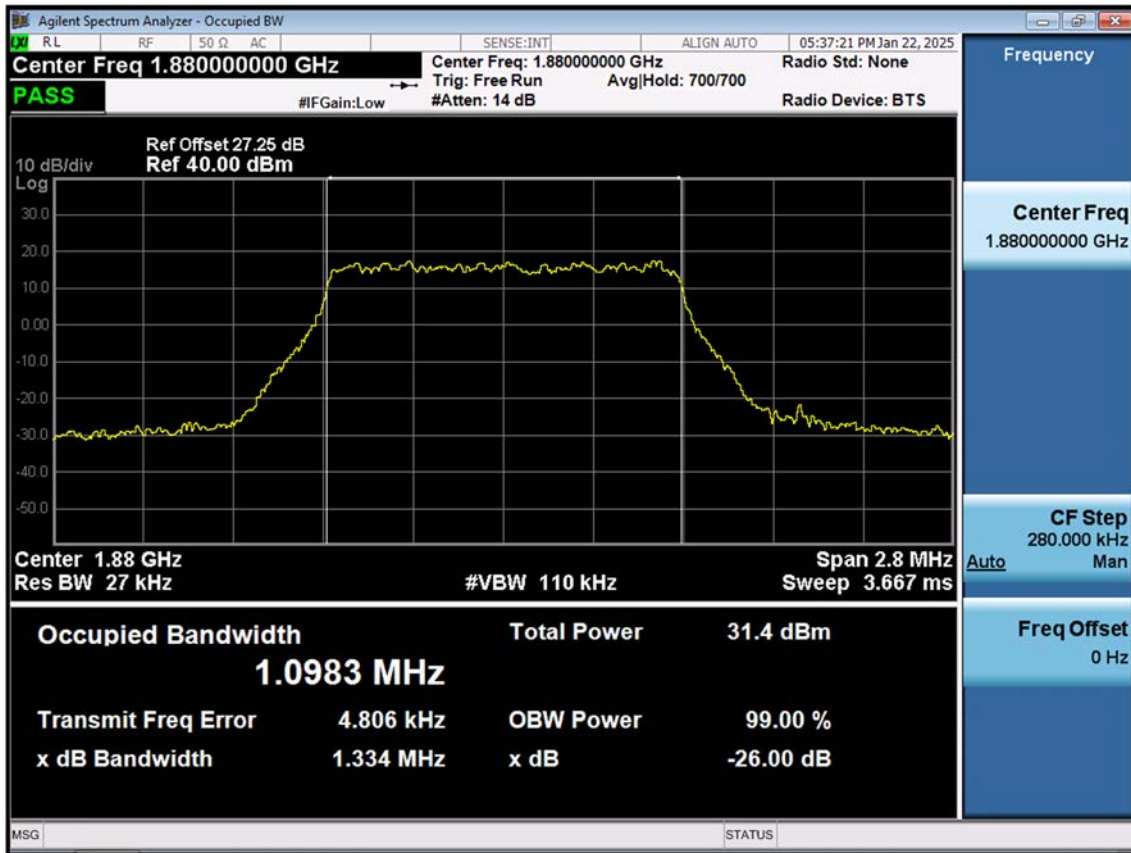


LTE B2_1.4M_OBW_Mid_16QAM_FullRB

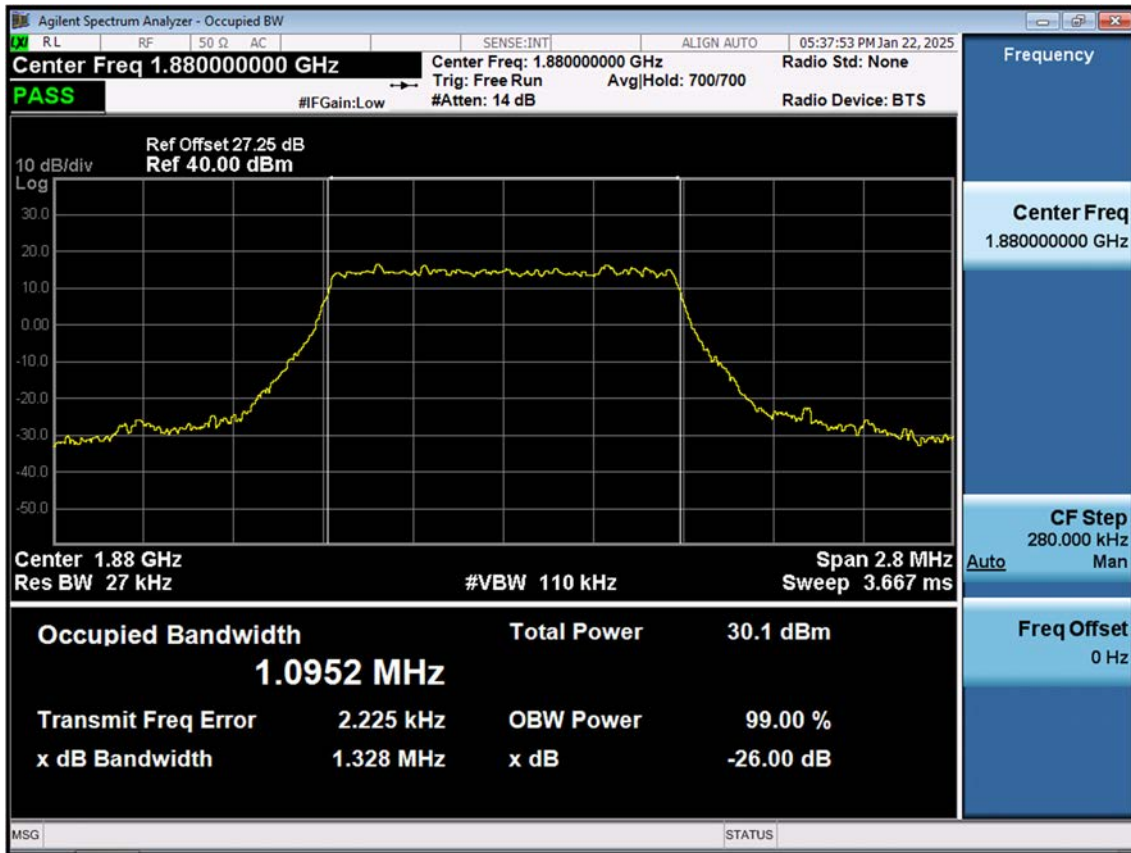


LTE B2_1.4M_OBW_Mid_64QAM_FullRB

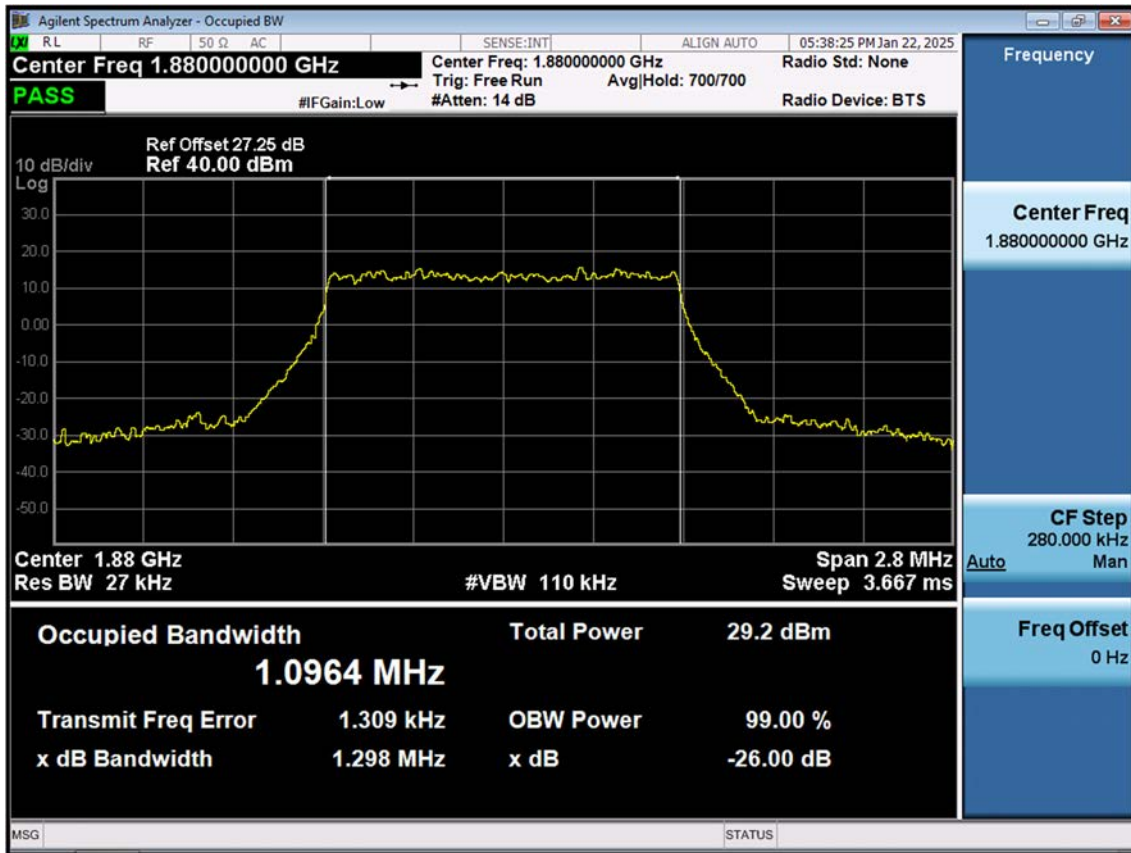


LTE B2_1.4M_OBW_Mid_256QAM_FullIRB

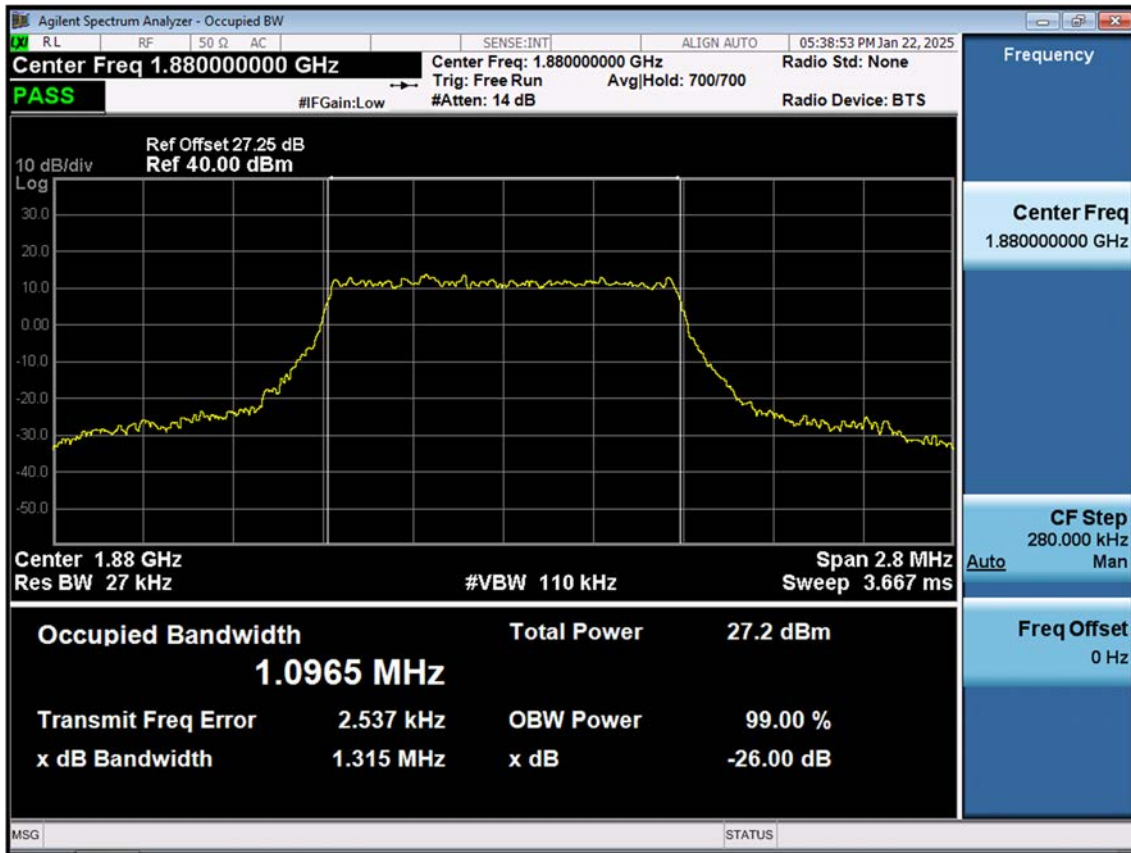


LTE B2_3 M_OBW_Mid_QPSK_FullRB

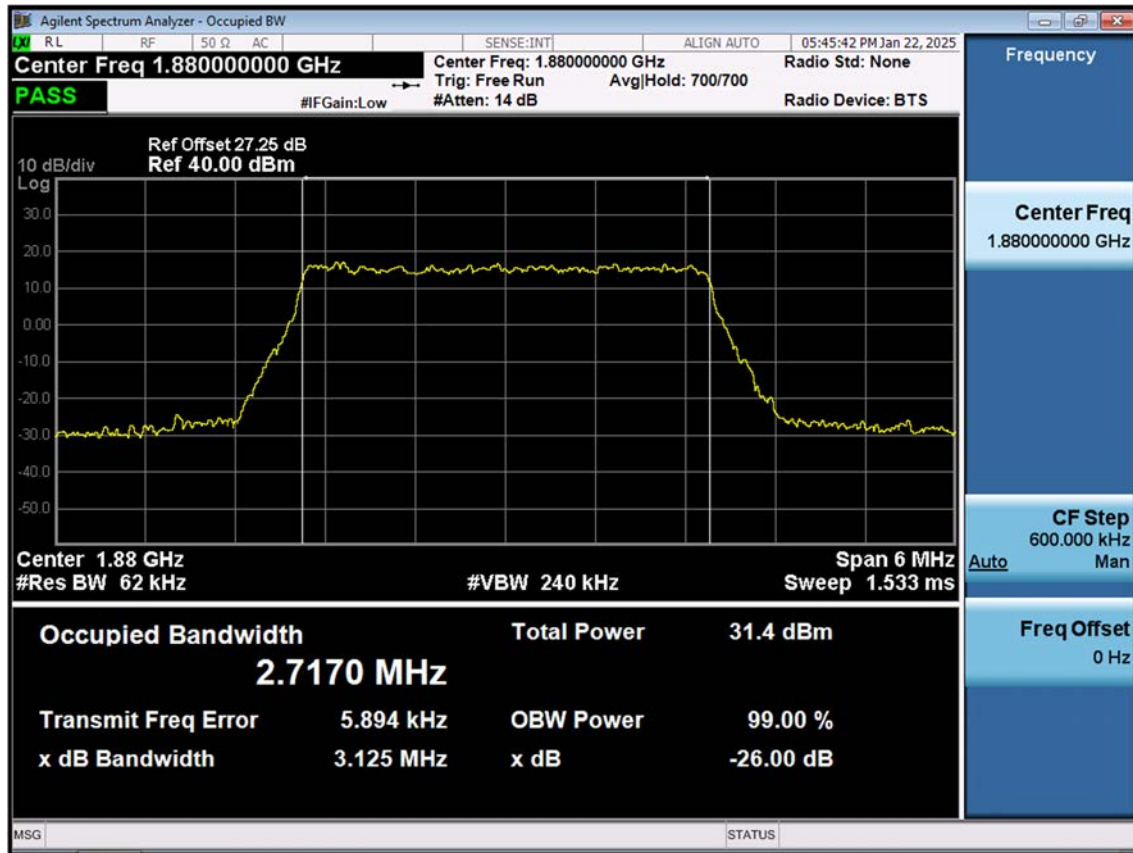


LTE B2_3 M_OBW_Mid_16QAM_FullRB

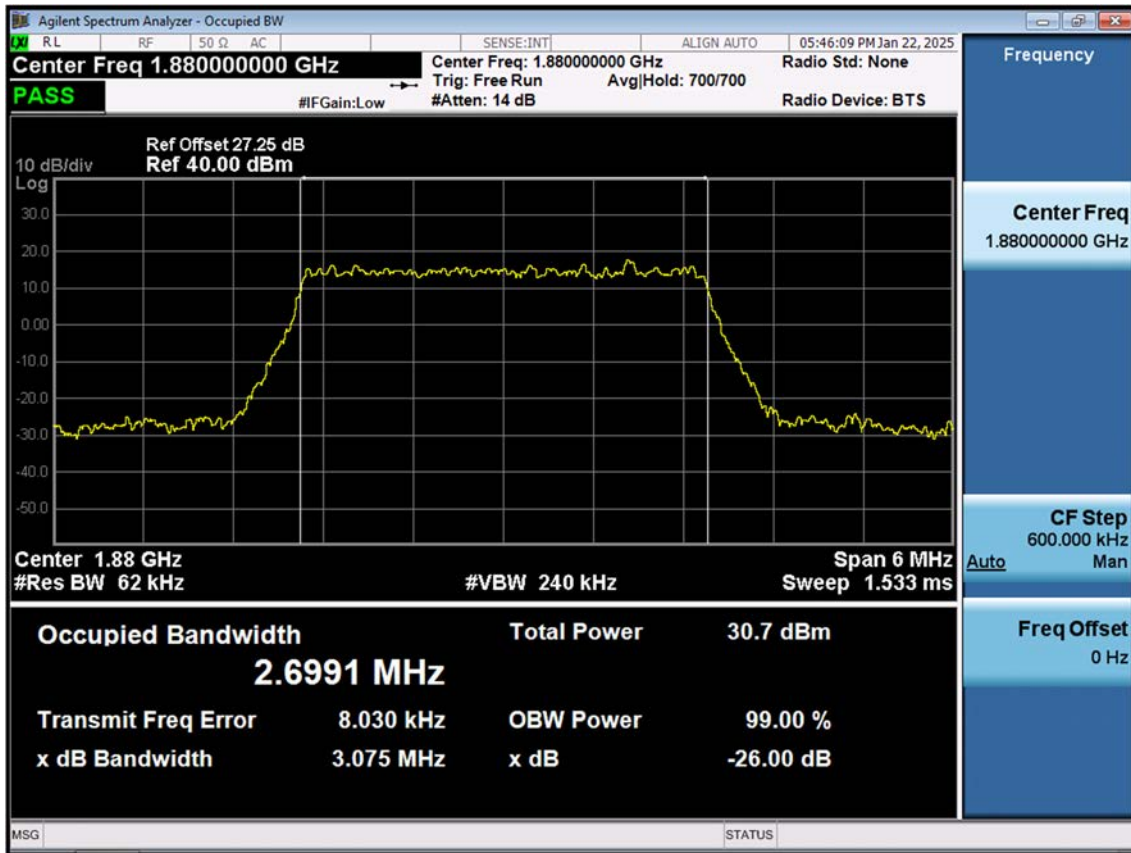


LTE B2_3 M_OBW_Mid_64QAM_FullRB

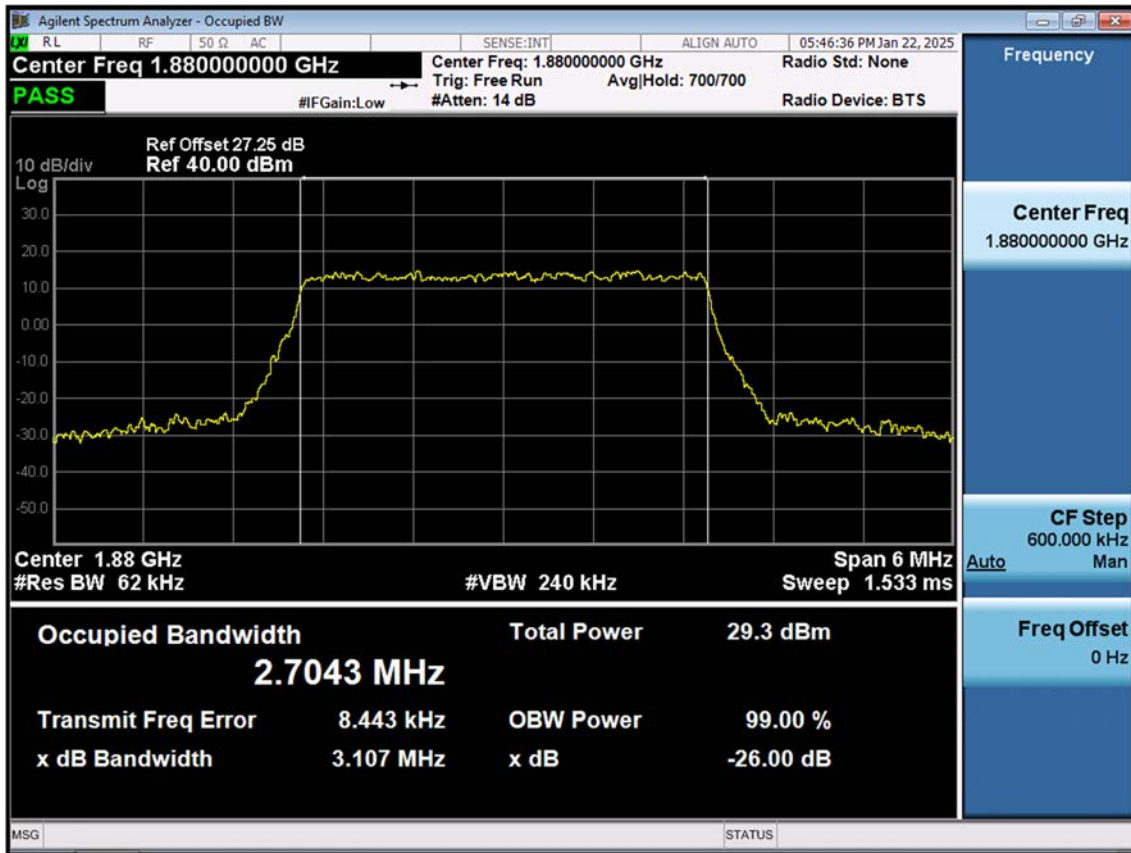


LTE B2_3 M_OBW_Mid_256QAM_FullRB

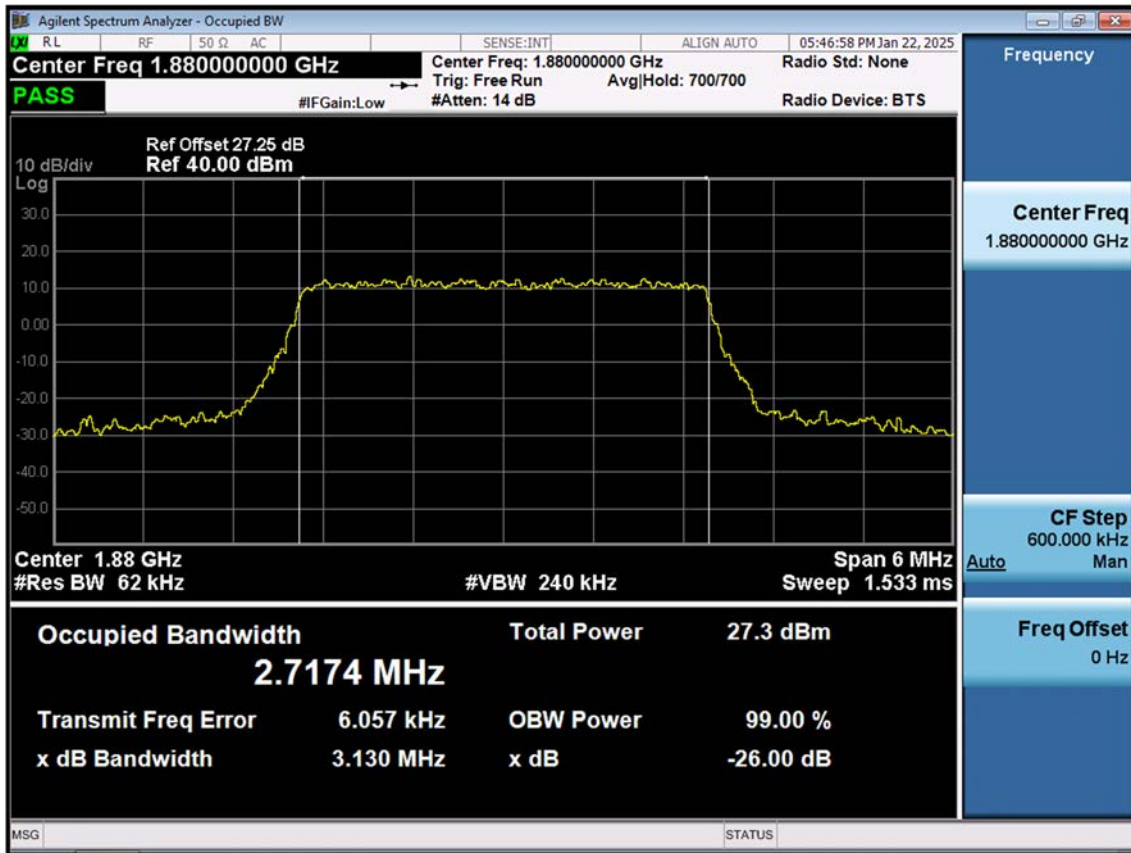


LTE B2_5 M_OBW_Mid_QPSK_FullRB

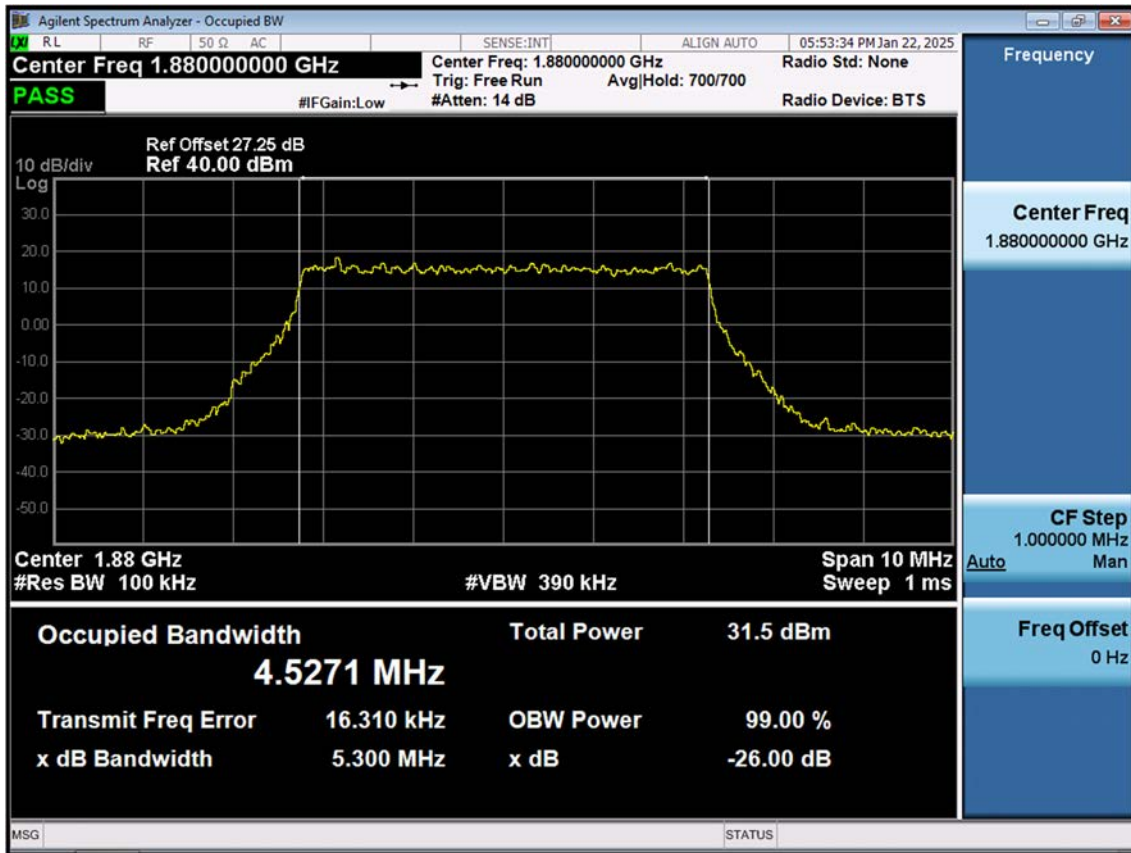


LTE B2_5 M_OBW_Mid_16QAM_FullRB

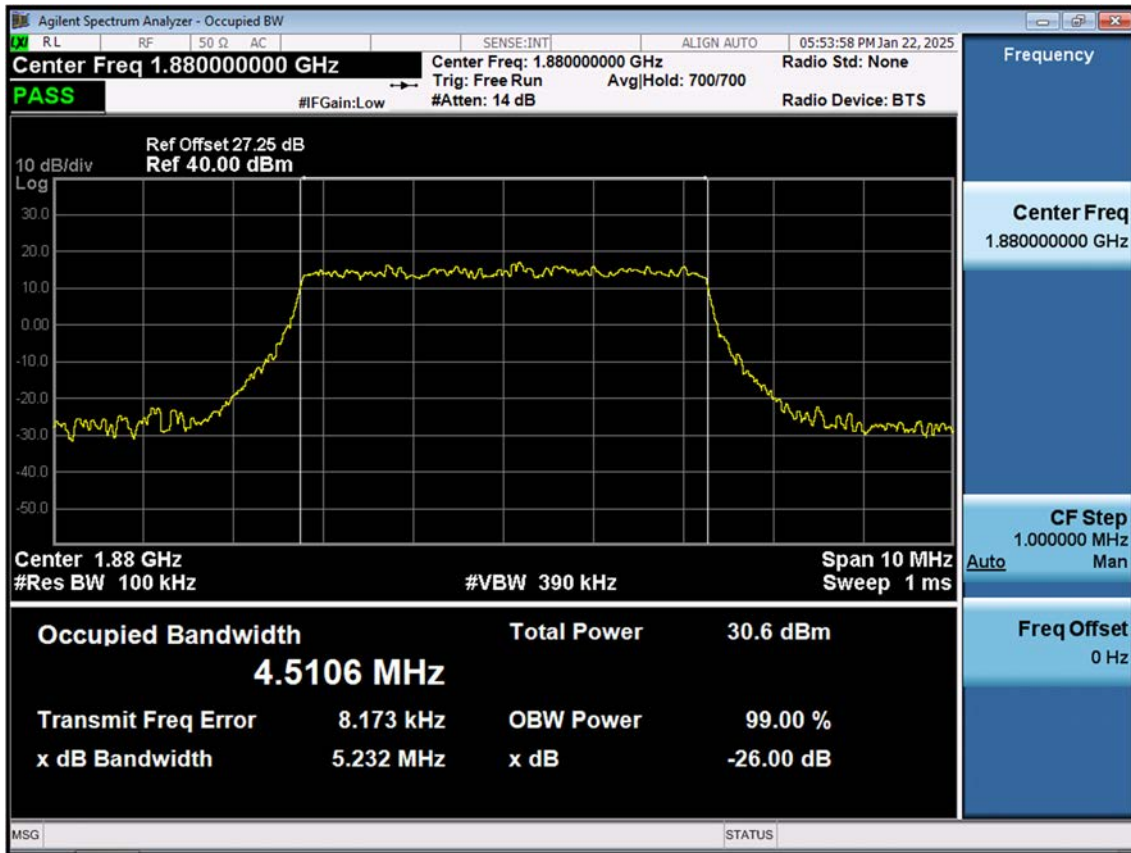


LTE B2_5 M_OBW_Mid_64QAM_FullRB

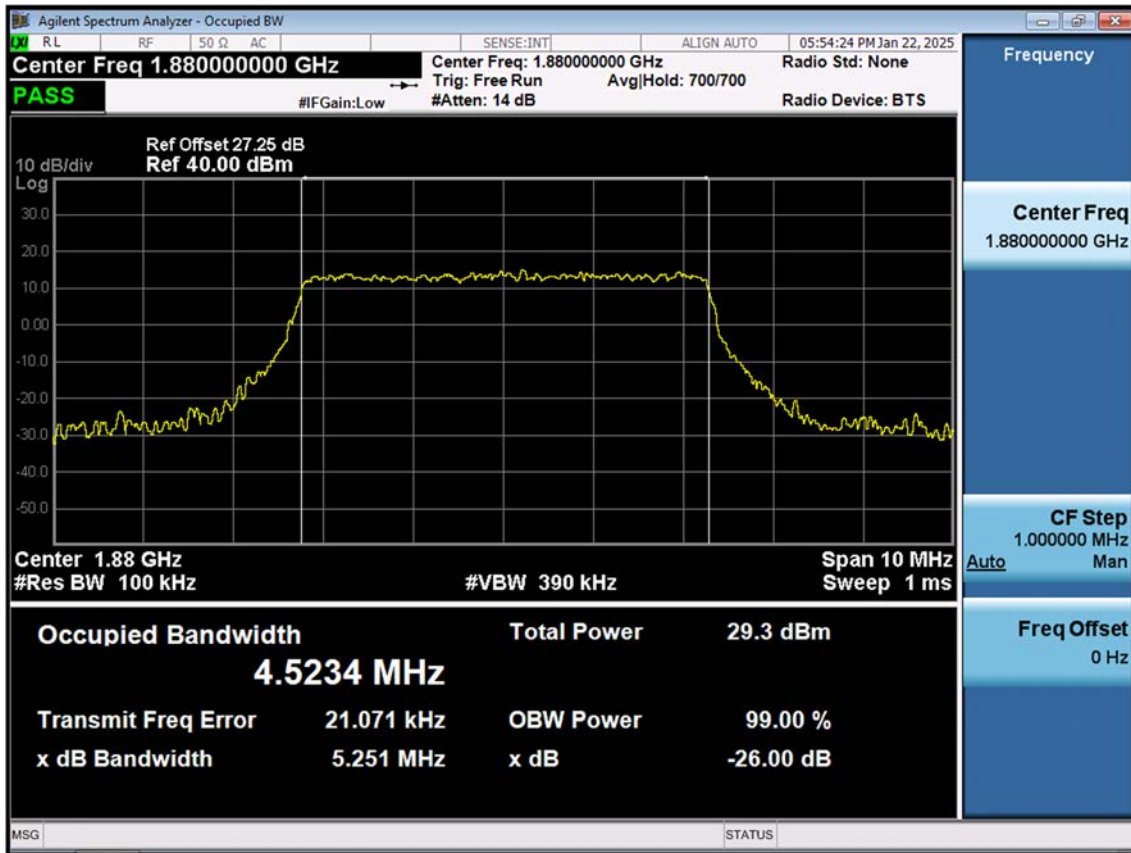


LTE B2_5 M_OBW_Mid_256QAM_FullRB

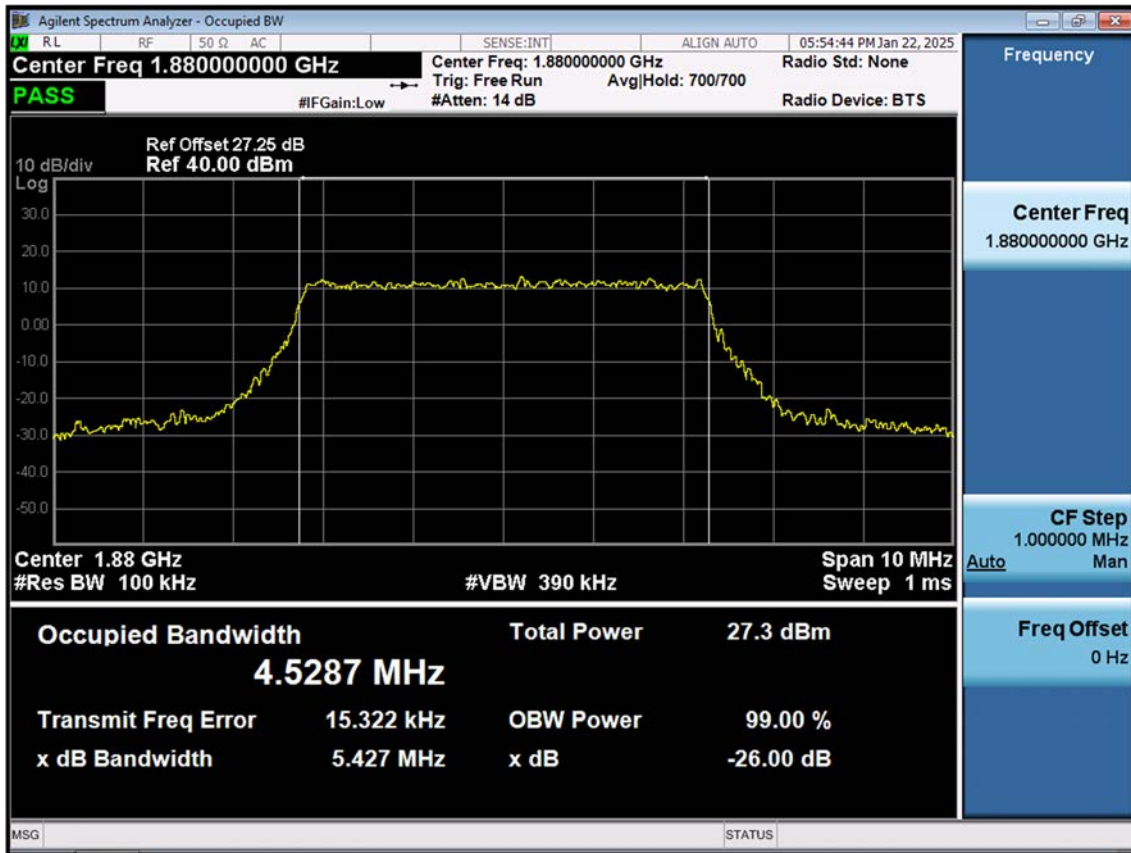


LTE B2_10 M_OBW_Mid_QPSK_FullRB

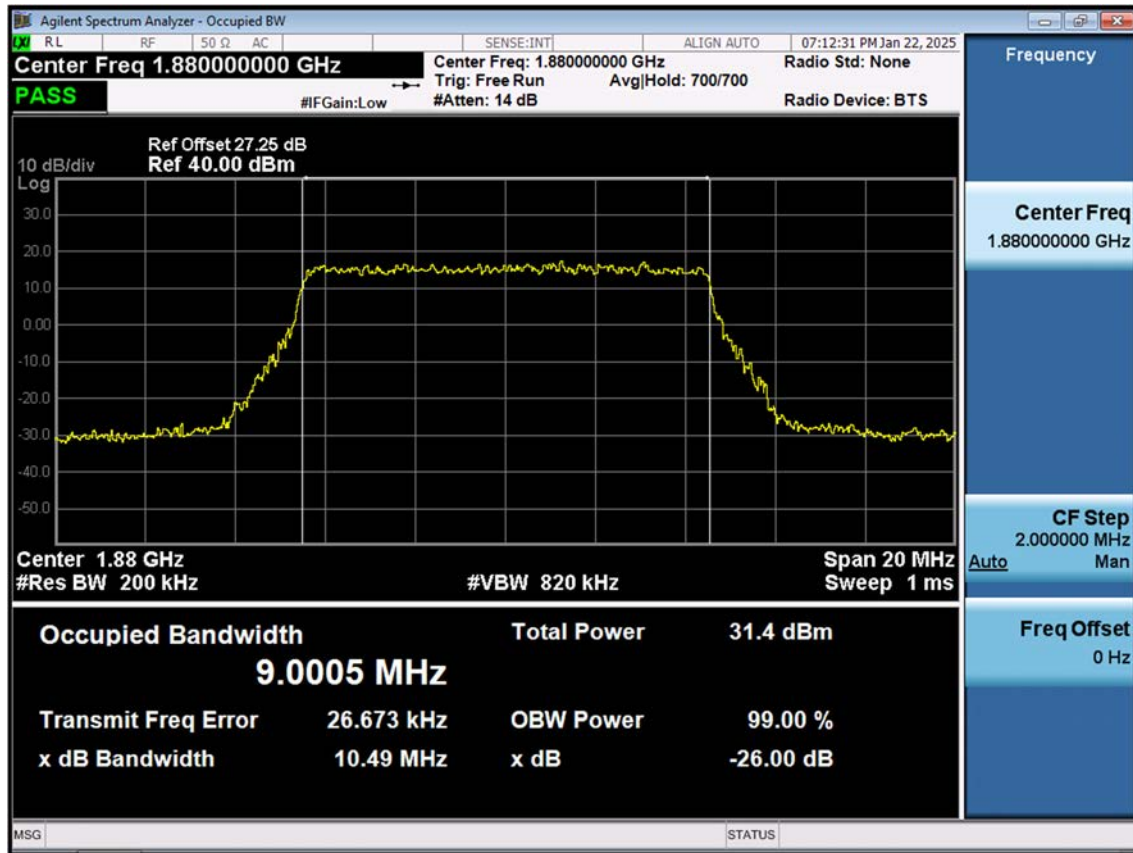


LTE B2_10 M_OBW_Mid_16QAM_FullRB

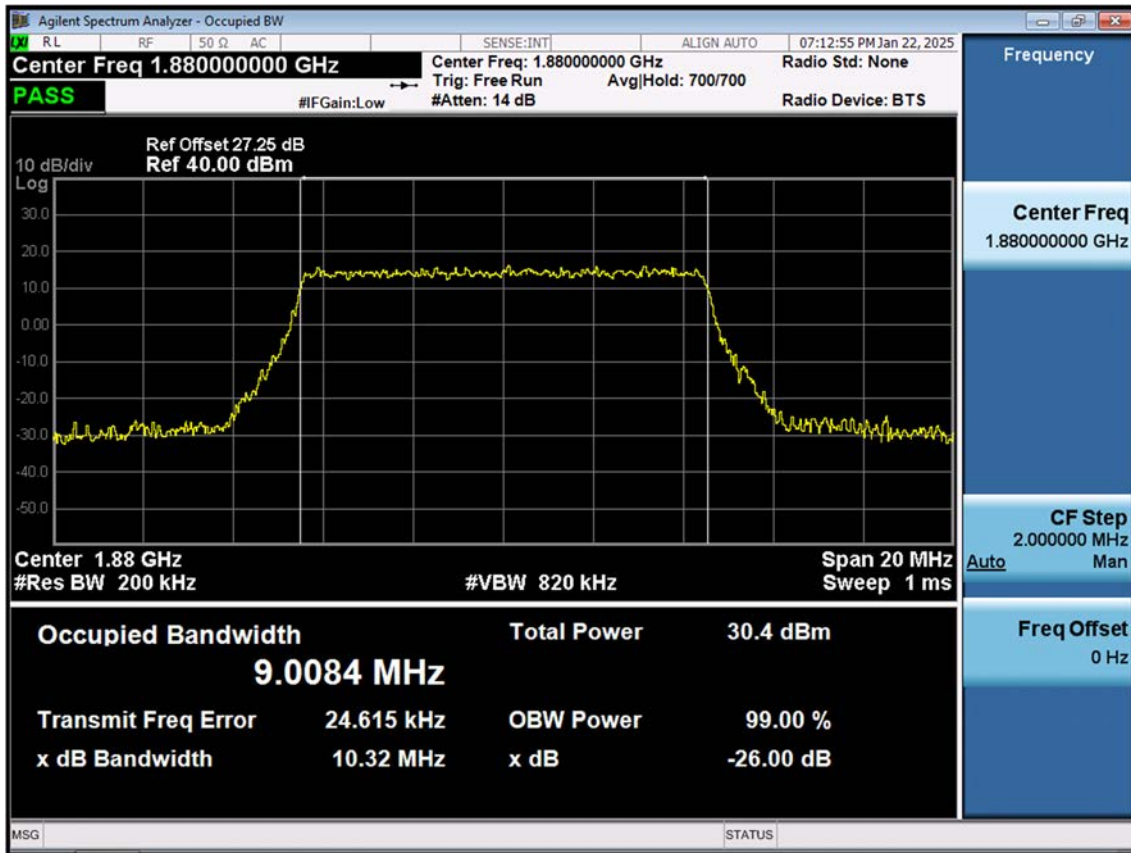


LTE B2_10 M_OBW_Mid_64QAM_FullRB

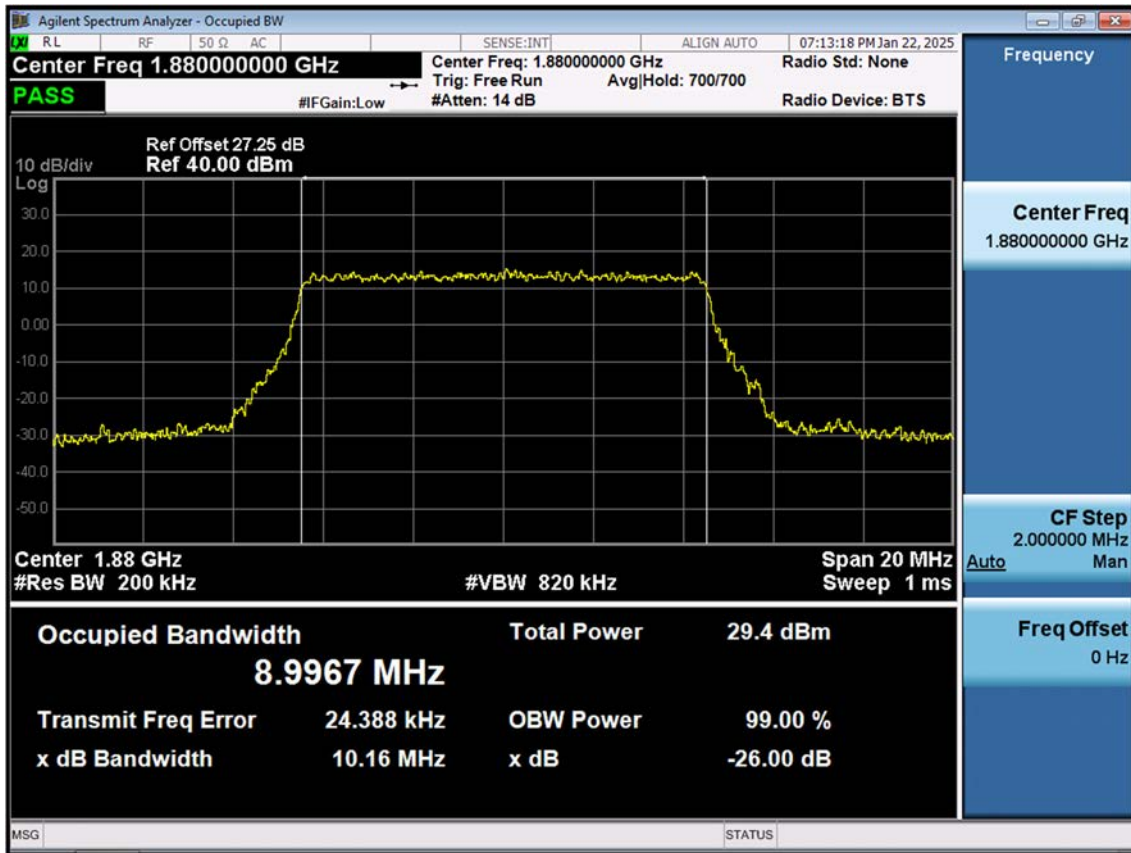


LTE B2_10 M_OBW_Mid_256QAM_FullRB

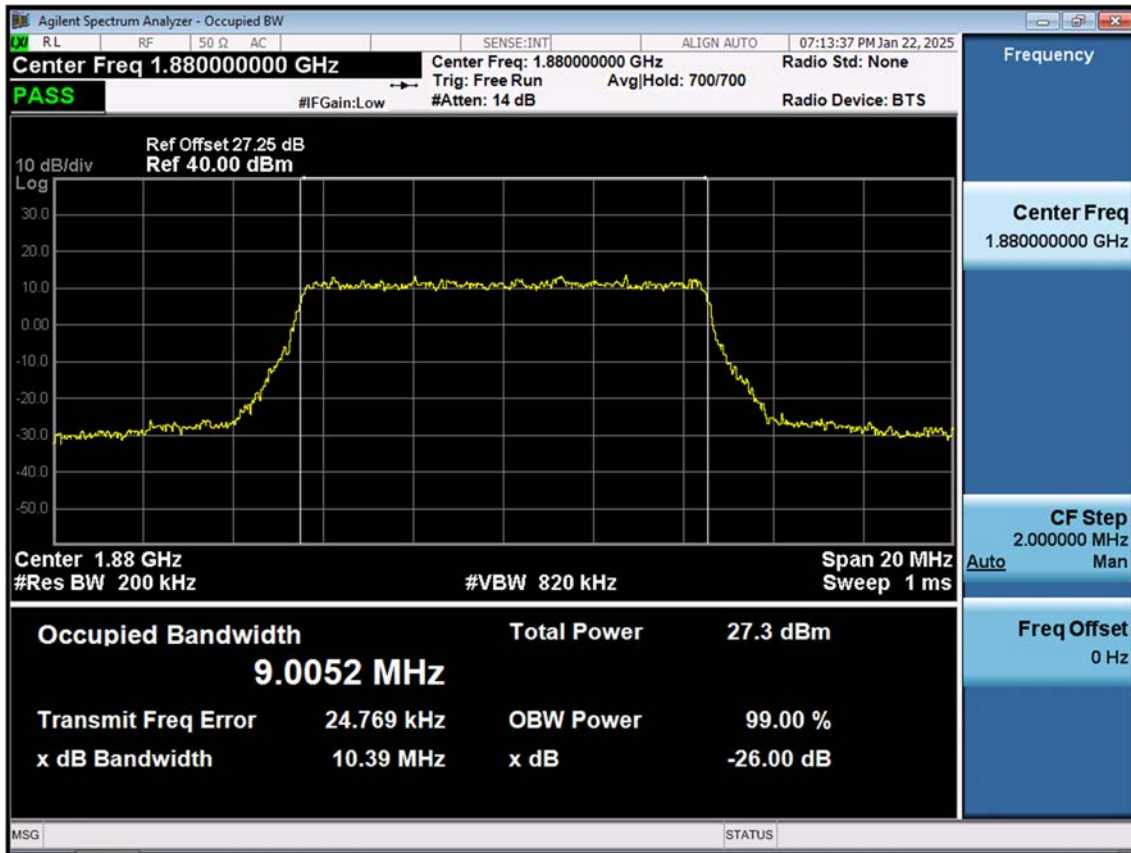


LTE B2_15 M_OBW_Mid_QPSK_FullRB

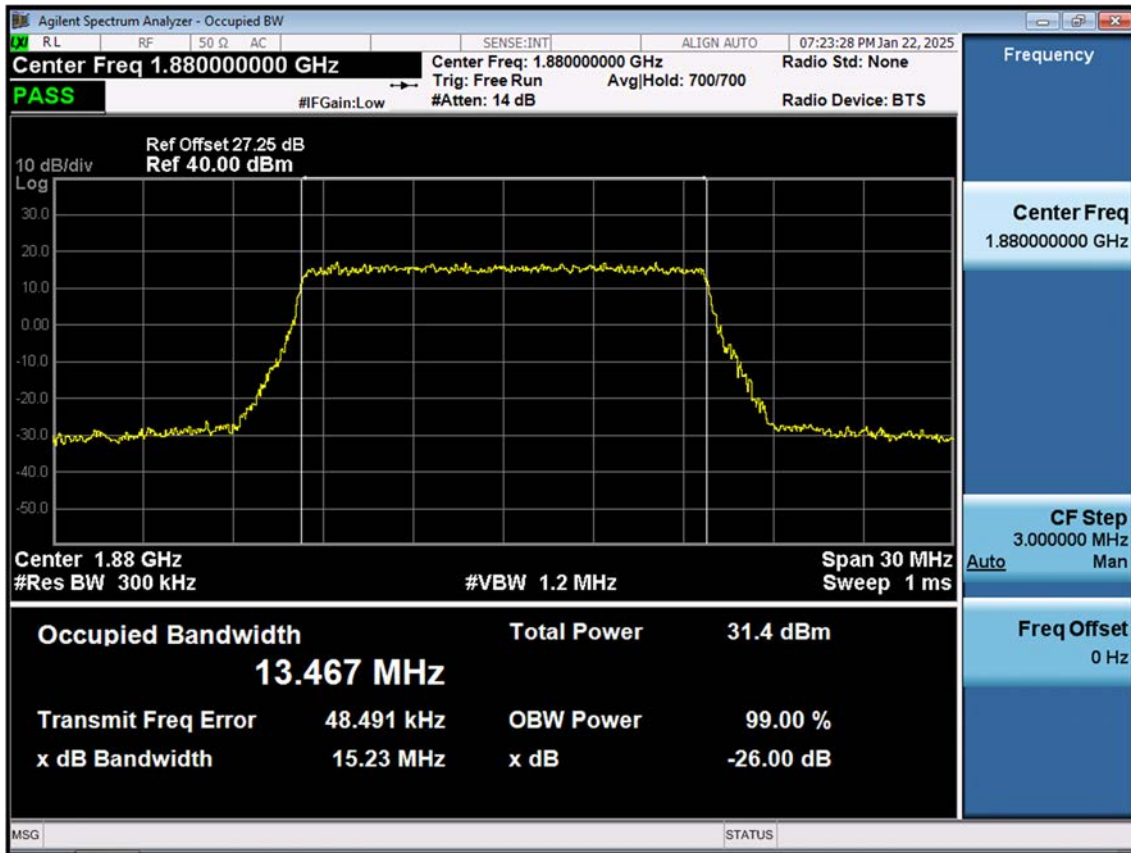


LTE B2_15 M_OBW_Mid_16QAM_FullRB

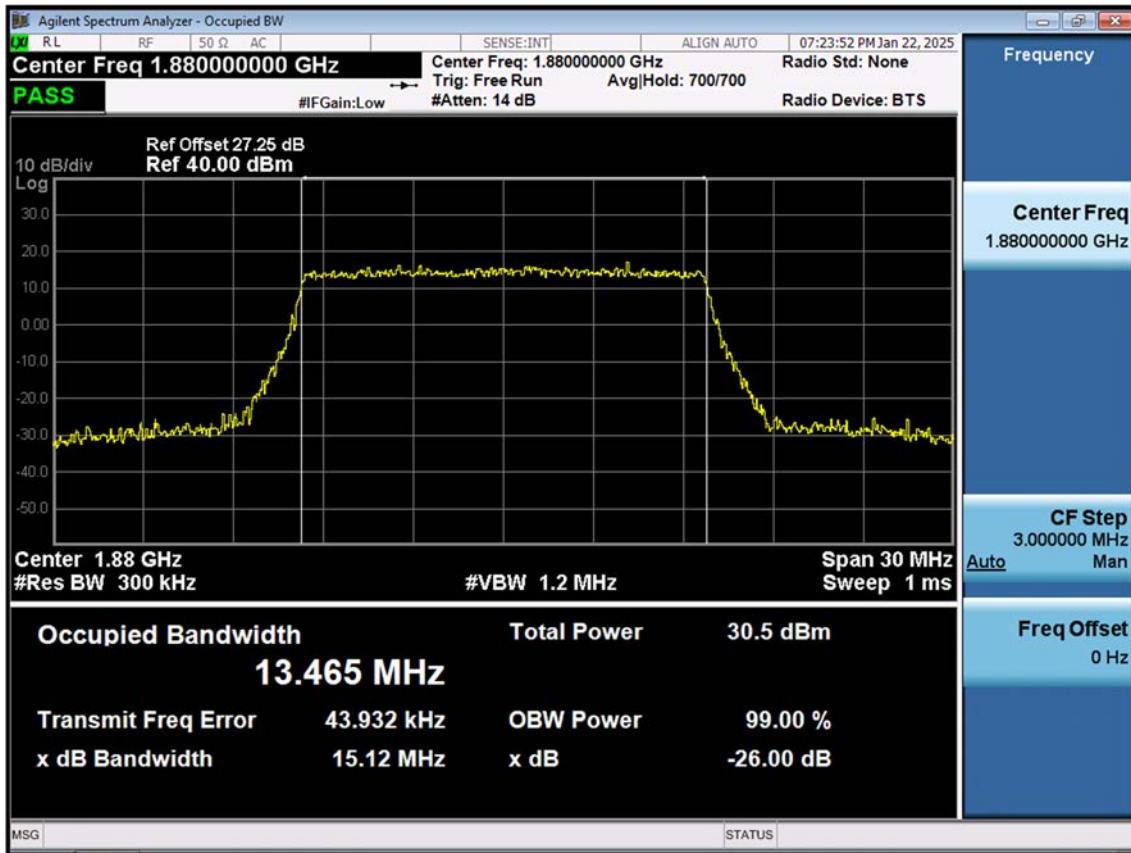


LTE B2_15 M_OBW_Mid_64QAM_FullRB

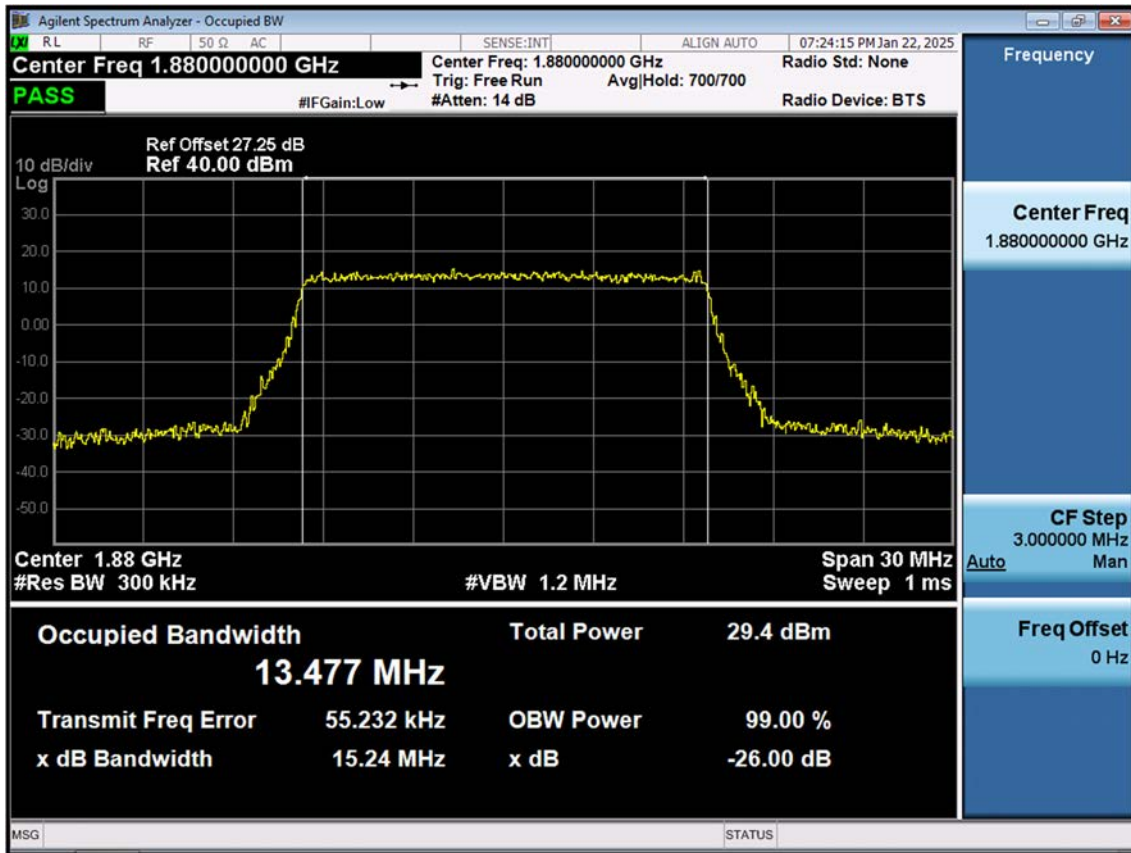


LTE B2_15 M_OBW_Mid_256QAM_FullRB

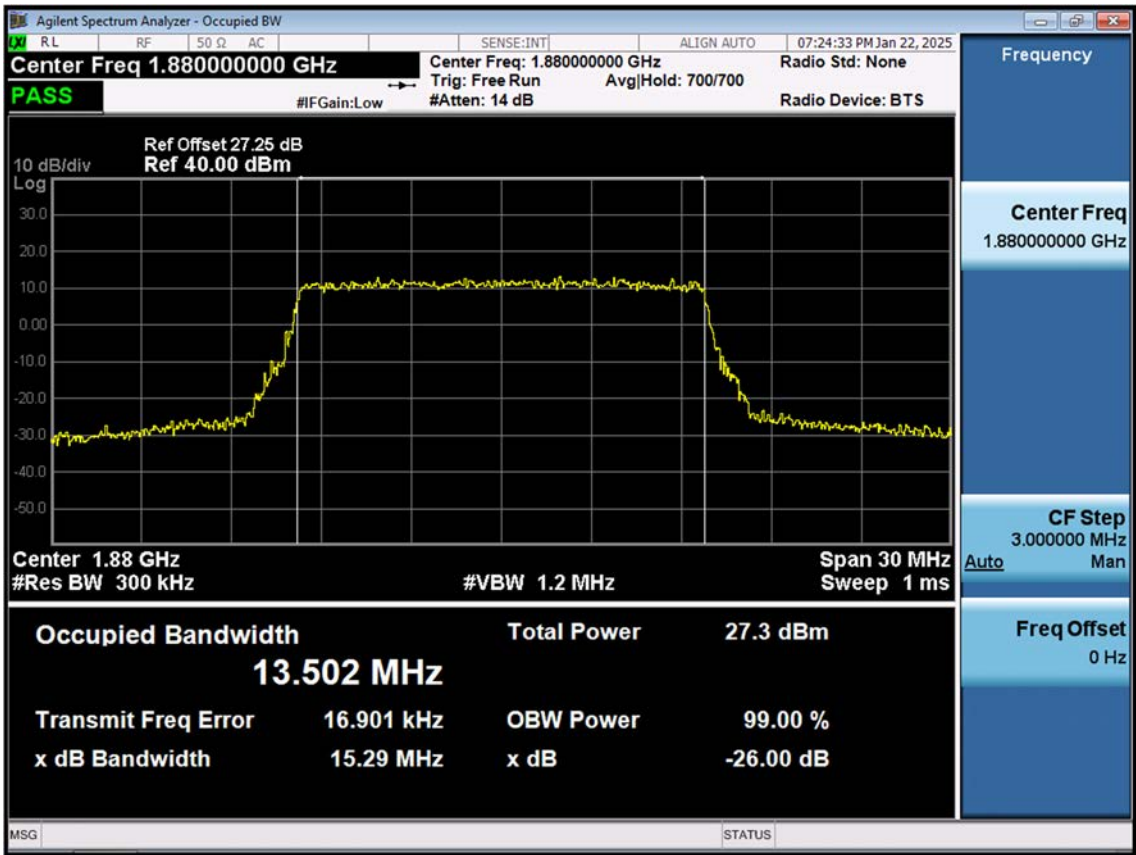


LTE B2_20 M_OBW_Mid_QPSK_FullRB

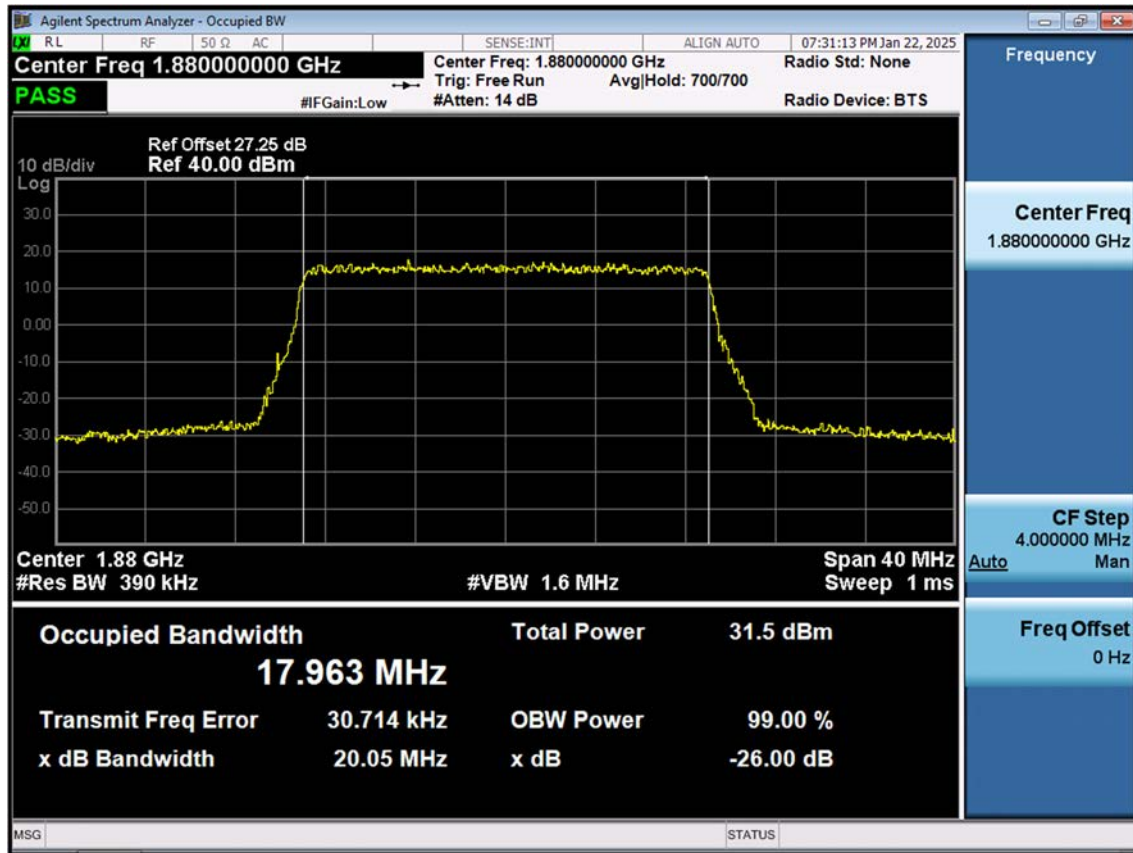


LTE B2_20 M_OBW_Mid_16QAM_FullRB

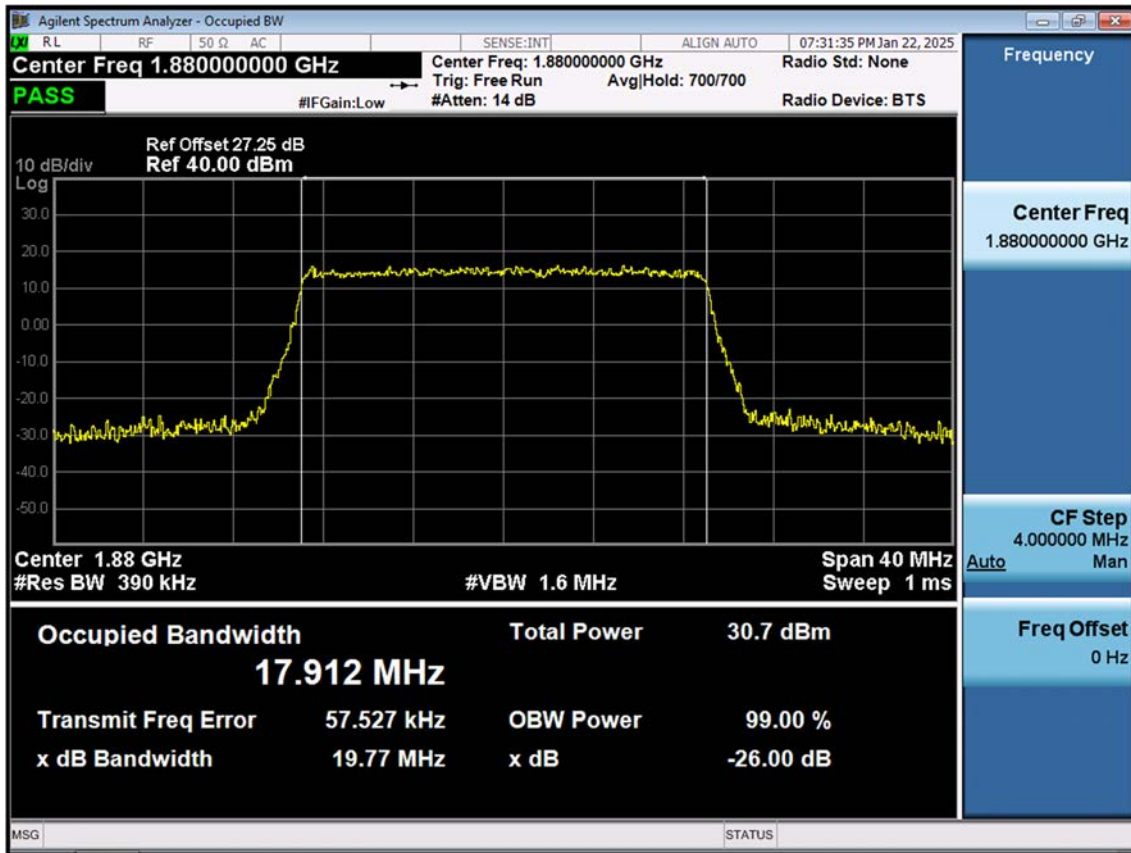


LTE B2_20 M_OBW_Mid_64QAM_FullRB

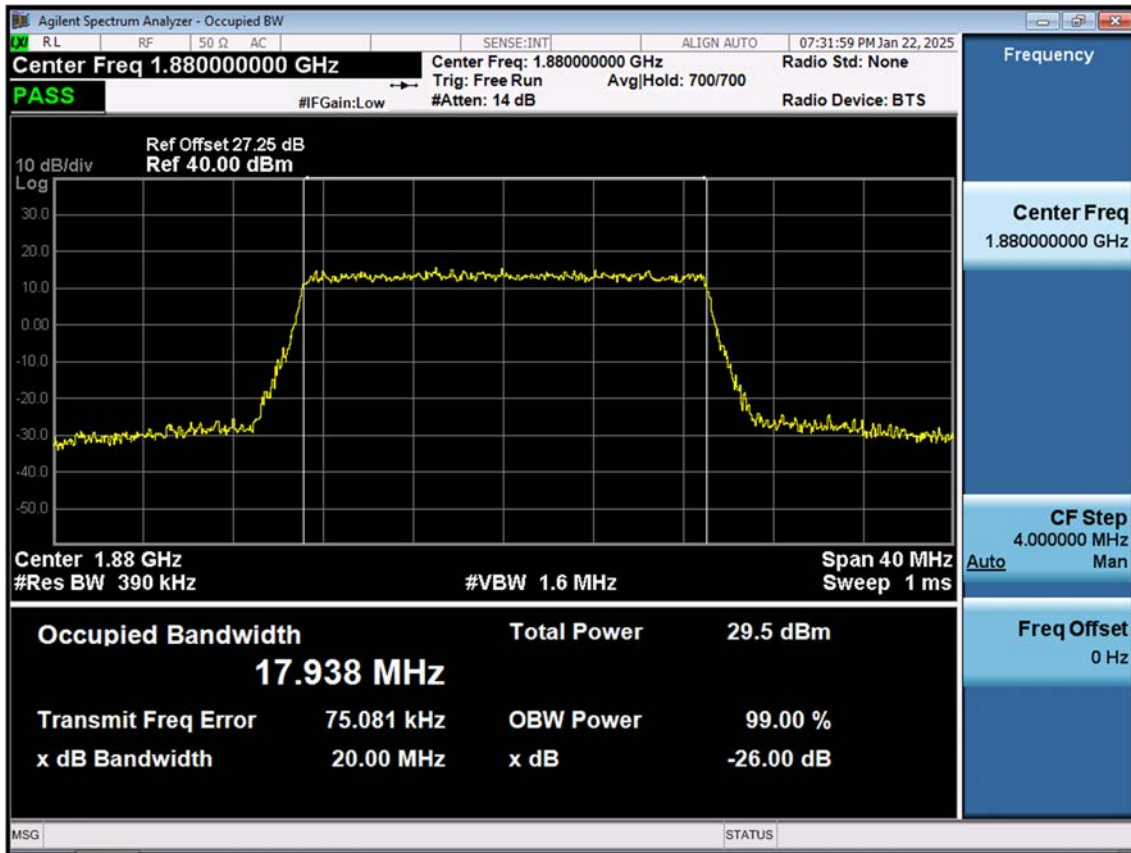


LTE B2_20 M_OBW_Mid_256QAM_FullRB

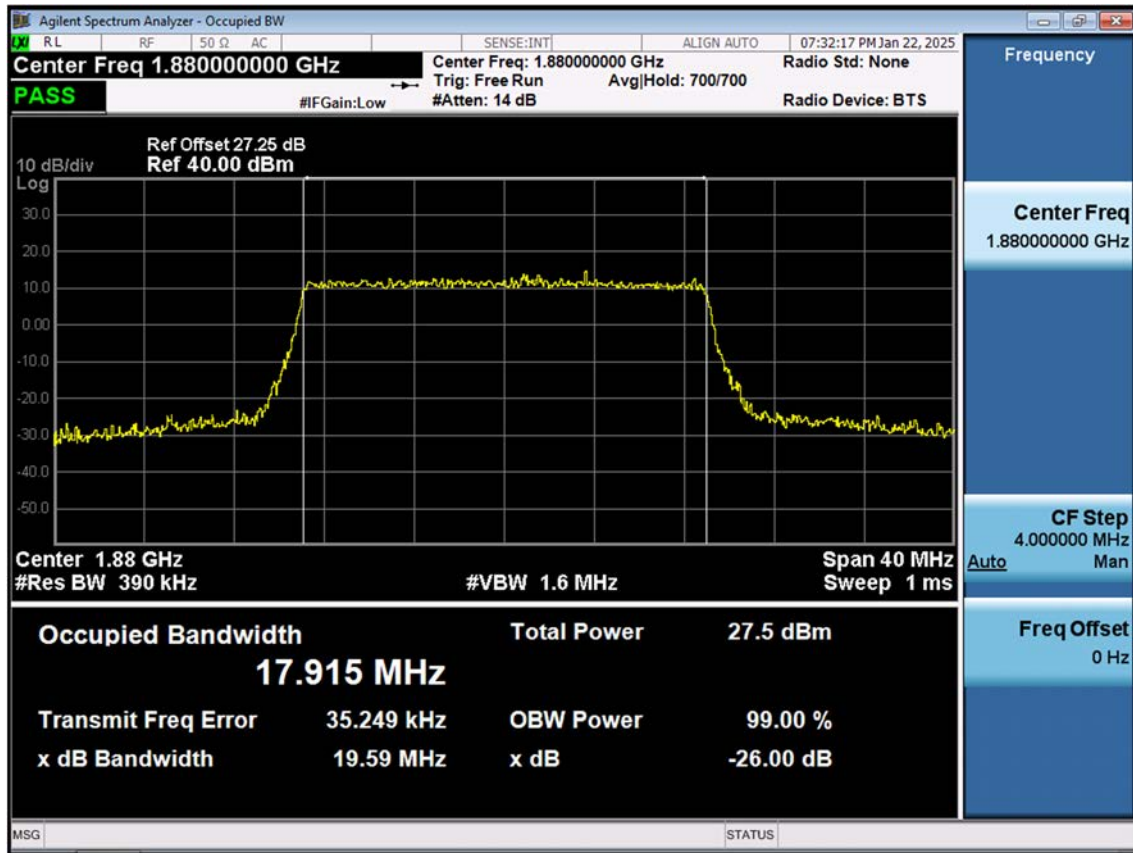


LTE B2_1.4M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

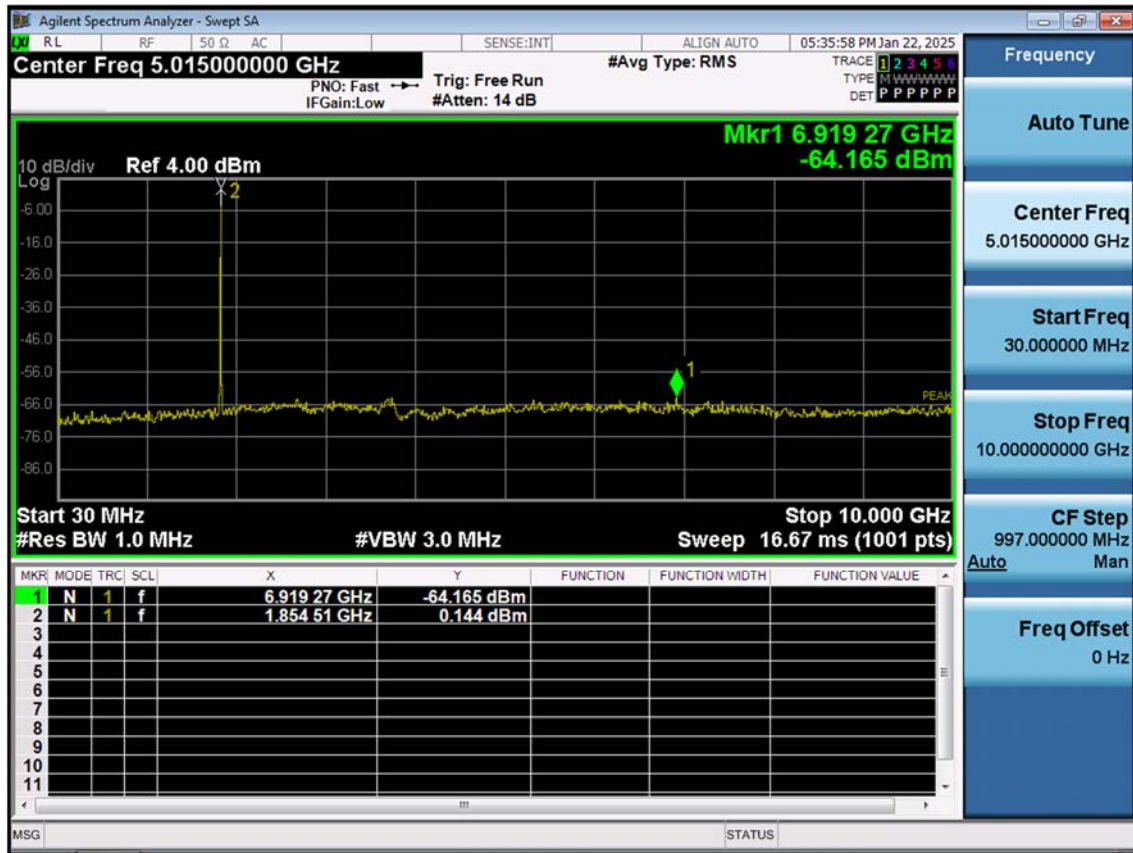

LTE B2_1.4M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

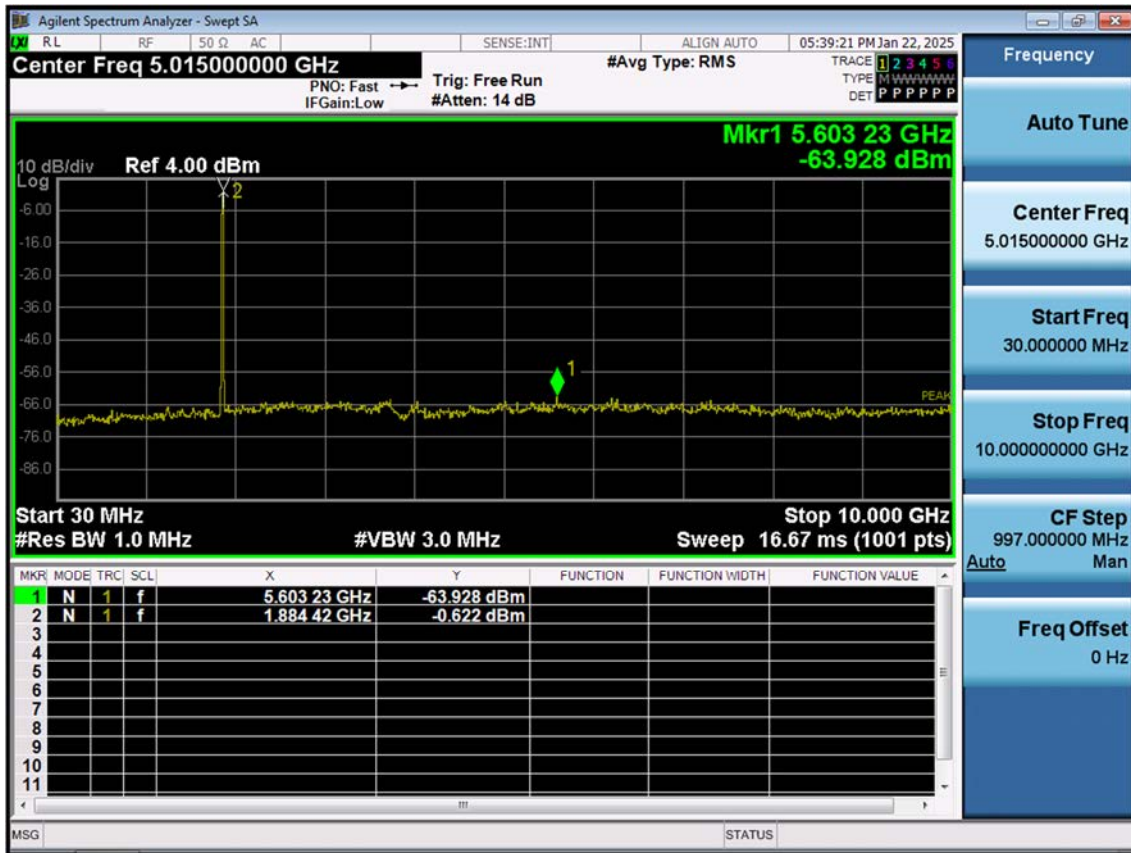

LTE B2_1.4M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

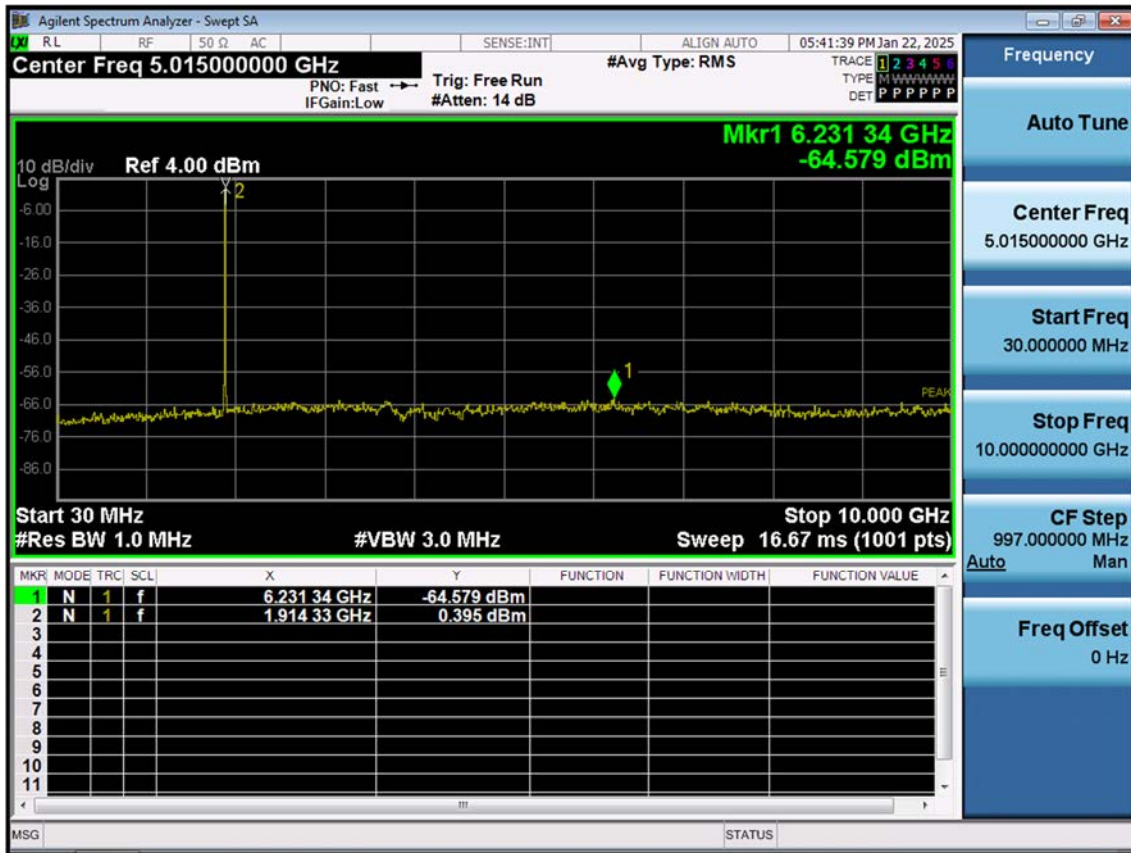

LTE B2_3 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

