

TEST REPORT

FCC 3G Test for SM-X528U
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2502-FC002

DATE OF ISSUE
February 10, 2025

Tested by
Jae Mun Do



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2502-FC002

DATE OF ISSUE

February 10, 2025

Applicant**SAMSUNG Electronics Co., Ltd.**

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name

Tablet

Model Name

SM-X528U

Date of Test

January 02, 2025 ~ February 07, 2025

FCC ID

A3LSMX528U

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

FCC Classification:

PCS Licensed Transmitter (PCB)

Test Standard Used

FCC Rule Part: § 22, 24, 27

Test Results

PASS

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	February 10, 2025	Initial Release

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. GENERAL INFORMATION	5
1.1. MAXIMUM OUTPUT POWER	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS	8
3.1 TEST PROCEDURE	8
3.2 RADIATED POWER	9
3.3 RADIATED SPURIOUS EMISSIONS	10
3.4 PEAK- TO- AVERAGE RATIO	11
3.5 OCCUPIED BANDWIDTH.	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	14
3.7 BAND EDGE	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	17
3.9 WORST CASE(CONDUCTED TEST)	18
3.10 WORST CASE(RADIATED TEST)	19
4. LIST OF TEST EQUIPMENT	20
5. MEASUREMENT UNCERTAINTY	21
6. SUMMARY OF TEST RESULTS	22
7. SAMPLE CALCULATION	23
8. TEST DATA	25
8.1 EFFECTIVE RADIATED POWER	25
8.2 EQUIVALENT ISOTROPIC RADIATED POWER	25
8.3 RADIATED SPURIOUS EMISSIONS	26
8.4 PEAK-TO-AVERAGE RATIO	29
8.5 OCCUPIED BANDWIDTH	30
8.6 CONDUCTED SPURIOUS EMISSIONS	31
8.7 BAND EDGE	31
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	32
9. TEST PLOTS	39
10. ANNEX A_ TEST SETUP PHOTO	79

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMX528U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§ 22, § 24, § 27
EUT Type:	Tablet
Model(s):	SM-X528U
Tx Frequency:	826.40 - 846.60 MHz (WCDMA850) 1 852.4 – 1 907.6 MHz (WCDMA1900) 1 712.4 – 1 752.6 MHz (WCDMA1700)
Rx Frequency:	871.40 - 891.60 MHz (WCDMA850) 1 932.4 – 1 987.6 MHz (WCDMA1900) 2 112.4 – 2 152.6 MHz (WCDMA1700)
Date(s) of Tests:	January 02, 2025 ~ February 07, 2025
Serial number:	Radiated : R32XC00A68K Conducted : R32XC00A9JV

1.1. MAXIMUM OUTPUT POWER

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M14F9W	0.195	22.90

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	EIRP	
				Max. Power (W)	Max. Power (dBm)
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	4M16F9W	0.368	25.66
WCDMA1700	1712.4 – 1752.6	2112.4 – 2152.6	4M16F9W	0.402	26.04

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Tablet with UMTS and LTE, Sub 6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80), Bluetooth, BT LE, Digitizer

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Radiated Power	- ANSI C63.26-2015 – Section 5.2.4.4 - KDB 971168 D01 v03r01 – Section 5.8
Radiated Spurious and Harmonic Emissions	- ANSI C63.26-2015 – Section 5.5.3 - KDB 971168 D01 v03r01 – Section 5.8

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test dat
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: : P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15 \text{ dB}$$

3.4 PEAK- TO- AVERAGE RATIO

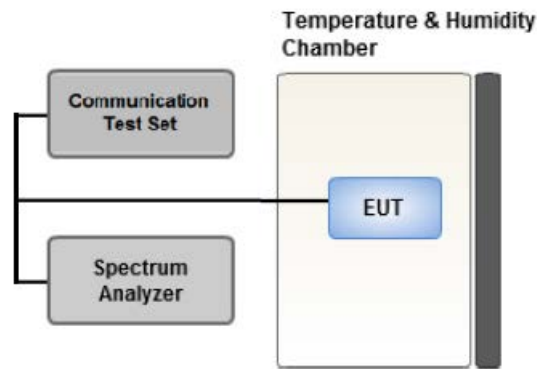

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - . - for continuous transmissions, set to 1 ms,
 - . - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .
 Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \times \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \times \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

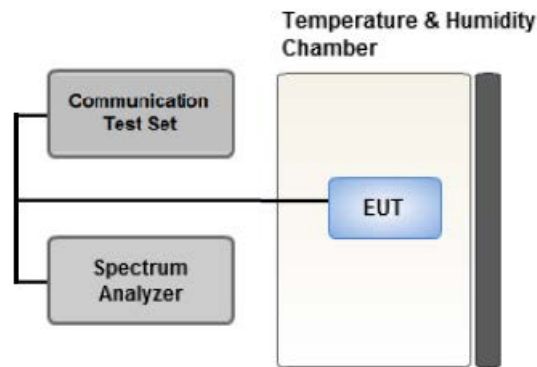

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

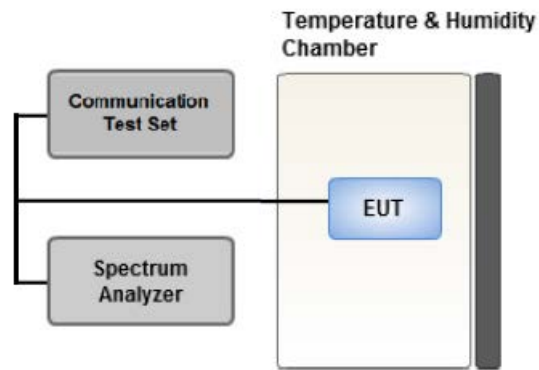

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings(WCDMA)

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = Peak
4. Trace Mode = Max Hold
5. Sweep time = auto
6. Number of points in sweep $\geq$ 2 x Span / RBW

3.7 BAND EDGE

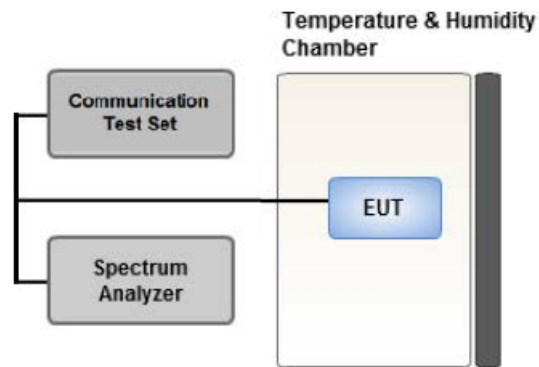

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \times \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels (low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where $\text{Margin} < 1$ dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

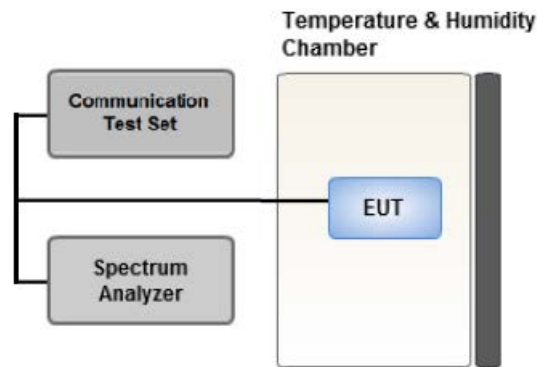

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter.

Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

Test Description	Modulation	Test Channel
Occupied Bandwidth	WCDMA : QPSK(RMC)	Low, Mid, High
Band Edge	WCDMA : QPSK(RMC)	Low, High
Peak-To-Average Ratio	WCDMA : QPSK(RMC)	Mid
Spurious and Harmonic Emissions at Antenna Terminal	WCDMA : QPSK(RMC)	Low, Mid, High

[Test Channel]

	Uplink Channel		
	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)
Low	9262	1312	4132
Mid	9400	1412	4183
High	9538	1513	4233

3.10 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
Worst case : Stand alone
- All simultaneous transmission scenarios of operation were investigated, and the test results showed no additional significant emissions relative to the least restrictive limit were observed.
Therefore, only the worst case(stand-alone) results were reported.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.

[Worst case_3G]

Test Description	Modulation	Paging Service	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : Z WCDMA B4 : X WCDMA B5 : X	Low, Mid, High
Radiated Spurious and Harmonic Emissions	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : Z WCDMA B4 : X WCDMA B5 : Z	Low, Mid, High

[Test Channel]

	UplinkChannel		
	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)
Low	9262	1312	4132
Mid	9400	1412	4183
High	9538	1513	4233

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	Switch box(1.2 G HPF+LNA)	HCT CO., LTD.,	F1L1	11/11/2025	Annual
RF Switching System	Switch box(3.3 G HPF+LNA)	HCT CO., LTD.,	F1L2	11/11/2025	Annual
RF Switching System	Switch box(LNA)	HCT CO., LTD.,	F1L4	11/11/2025	Annual
RF Switching System	Switch box(6 G HPF+LNA)	HCT CO., LTD.,	F1L7	11/11/2025	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/07/2025	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/26/2025	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/17/2025	Annual
DC Power Supply	E3632A	Agilent	MY40010147	08/06/2025	Annual
Dipole Antenna	UHAP	Schwarzbeck	01274	03/10/2026	Biennial
Dipole Antenna	UHAP	Schwarzbeck	01288	08/07/2026	Biennial
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/11/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/19/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/06/2025	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/28/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	08/19/2026	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	11/13/2025	Annual
Radio Communication Test Station	MT8000A	Anritsu Corp.	6272613402	08/28/2025	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/26/2025	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/17/2025	Annual
Signal & Spectrum Analyzer (2 Hz~67 GHz)	FSW67	REOHDE & SCHWARZ	101736	05/23/2025	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ kHz)
Occupied Bandwidth	95 (Confidence level about 95 %, $k=2$)
Frequency stability	28 (Confidence level about 95 %, $k=2$)

Parameter	Expanded Uncertainty ($\pm$ dB)
Block Edge	0.70 (Confidence level about 95 %, $k=2$)
Conducted Spurious Emissions	1.18 (Confidence level about 95 %, $k=2$)
Peak- to- Average Ratio	0.68 (Confidence level about 95 %, $k=2$)
Radiated Power	4.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 22.917(a), § 24.238(a), § 27.53(h)	< 43 + 10 x log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§ 22.913(d), § 24.232(d), § 27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§ 2.1055, § 22.355	< 2.5 ppm	PASS
	§ 24.235, § 27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§ 22.913(a)(5)	< 7 Watts max. ERP	PASS
Equivalent Isotropic Radiated Power	§ 24.232(c), § 27.50(d)(4)	< 2 Watts max. EIRP < 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 22.917(a), § 24.238(a), § 27.53(h)	< 43 + 10 x log ₁₀ (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA850	4132	826.4	-28.12	34.29	-9.95	1.44	H	< 7.00	0.195	22.90
	4183	836.6	-28.19	34.22	-9.95	1.45	H		0.191	22.82
	4233	846.6	-28.91	33.85	-9.85	1.45	H		0.180	22.55

8.2 EQUIVALENT ISOTROPIC RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA1900	9262	1852.4	-17.42	17.10	10.40	2.07	V	< 2.00	0.349	25.43
	9400	1880.0	-17.48	17.47	10.40	2.21	V		0.368	25.66
	9538	1907.6	-18.38	16.56	10.40	2.17	V		0.301	24.79

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA1700	1312	1712.4	-15.86	17.51	10.04	2.06	H	< 1.00	0.354	25.49
	1412	1732.4	-15.52	17.92	10.12	2.08	H		0.395	25.96
	1513	1752.6	-15.62	17.91	10.21	2.08	H		0.402	26.04

8.3 RADIATED SPURIOUS EMISSIONS

MODULATION SIGNAL: WCDMA850

DISTANCE: 3 meters

Ch.	Freq. (MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit
4132 (826.4)	1 652.80	-42.52	9.61	-67.29	2.02	V	-59.70	-13.00
	2 479.20	-40.91	10.34	-61.71	2.55	V	-53.92	-13.00
	3 305.60	-43.44	12.18	-63.05	2.97	V	-53.84	-13.00
4183 (836.6)	1 673.20	-42.43	9.72	-67.39	2.05	V	-59.72	-13.00
	2 509.80	-42.44	10.59	-62.97	2.51	V	-54.89	-13.00
	3 346.40	-43.23	12.37	-63.24	2.96	H	-53.83	-13.00
4233 (846.6)	1 693.20	-42.69	9.85	-67.53	2.07	H	-59.75	-13.00
	2 539.80	-42.26	10.67	-62.78	2.53	V	-54.64	-13.00
	3 386.40	-43.10	12.52	-63.08	2.99	H	-53.55	-13.00

▣ MODULATION SIGNAL: WCDMA1900

▣ DISTANCE: 3 meters

Ch.	Freq. (MHz)	<u>Measured</u> <u>Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> [dBm]	C.L	Pol.	Result (dBm)	Limit
9262 (1852.4)	3 704.80	-45.77	12.28	-62.90	3.08	V	-53.70	-13.00
	5 557.20	-44.66	13.03	-56.76	3.88	V	-47.61	-13.00
	7 409.60	-45.79	10.79	-48.60	4.57	V	-42.38	-13.00
9400 (1880.0)	3 760.00	-44.83	12.22	-60.44	3.12	V	-51.34	-13.00
	5 640.00	-44.97	13.12	-57.41	3.92	V	-48.21	-13.00
	7 520.00	-45.66	10.82	-48.31	4.61	V	-42.10	-13.00
9538 (1907.6)	3 815.20	-43.80	12.16	-60.24	3.20	V	-51.28	-13.00
	5 722.80	-44.52	13.05	-56.89	4.00	V	-47.84	-13.00
	7 630.40	-45.88	11.18	-48.68	4.66	V	-42.16	-13.00

MODULATION SIGNAL: WCDMA1700

DISTANCE: 3 meters

Ch.	Freq. (MHz)	<u>Measured</u> <u>Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> [dBm]	C.L	Pol.	Result (dBm)	Limit
1312 (1712.4)	3 424.80	-43.44	12.43	-62.35	2.99	H	-52.91	-13.00
	5 137.20	-44.23	12.33	-56.80	3.81	H	-48.28	-13.00
	6 849.60	-44.84	11.90	-51.94	4.36	V	-44.40	-13.00
1412 (1732.4)	3 464.80	-43.04	12.34	-61.49	3.02	V	-52.17	-13.00
	5 197.20	-44.13	12.60	-57.09	3.79	V	-48.28	-13.00
	6 929.60	-44.72	11.65	-51.54	4.40	V	-44.29	-13.00
1513 (1752.6)	3 505.20	-43.86	12.34	-61.82	3.05	H	-52.53	-13.00
	5 257.80	-45.14	12.99	-57.51	3.79	V	-48.31	-13.00
	7 010.40	-44.59	11.26	-49.84	4.42	H	-43.00	-13.00

8.4 PEAK-TO-AVERAGE RATIO

Band	Ch.	Measured P _{PK} (dBm)	Measured P _{Avg} (dBm)	P _{Avg} (Duty Cycle)			P.A.R. = P _{PK} - P _{Avg} (dB)	Limit (dB)	Pass / Fail	
				Tx _{Total} (ms)	Tx _{On} (ms)	Factor (dB)				
WCDMA850	4408	CCDF Procedure						2.95	13	Pass
WCDMA1900	9400							2.98		
WCDMA1700	1412							3.04		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 49 ~ 51.

8.5 OCCUPIED BANDWIDTH

Band	Channel	Frequency (MHz)	Data (GSM: kHz / WCDMA : MHz)
WCDMA850	4132	826.40	4.1426
	4183	836.60	4.1443
	4233	846.60	4.1361
WCDMA1900	9262	1852.40	4.1505
	9400	1880.00	4.1534
	9538	1907.60	4.1599
WCDMA1700	1312	1712.40	4.1578
	1412	1732.40	4.1625
	1513	1752.60	4.1603

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 40 ~ 48.

8.6 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result	Limit (dBm)
WCDMA850	4132	4.9053	27.976	-67.060	-39.084	-13.00
	4183	9.3121	28.591	-66.963	-38.372	
	4233	9.6411	28.591	-67.265	-38.674	
WCDMA1900	9262	19.5400	29.489	-64.829	-35.340	
	9400	18.6300	29.489	-64.662	-35.173	
	9538	19.9000	29.489	-65.096	-35.607	
WCDMA1700	1712.4	19.98000	29.489	-64.816	-35.327	
	1732.4	18.19000	29.489	-64.757	-35.268	
	1752.6	20.00000	29.489	-64.404	-34.915	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 64 ~ 78.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.7 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 52 ~ 63.

8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


Mode:	WCDMA850
OPERATING FREQUENCY:	836,600,000 Hz
CHANNEL:	4183
REFERENCE VOLTAGE:	3.860 VDC
DEVIATION LIMIT:	$\pm 0.000\ 25\ \%$ or $2.5\ \text{ppm}$

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	836 599 997	0.0	0.000 000	0.0000
100 %		-30	836 599 994	-3.0	0.000 000	-0.0036
100 %		-20	836 599 993	-4.1	0.000 000	-0.0049
100 %		-10	836 599 994	-2.9	0.000 000	-0.0034
100 %		0	836 599 994	-3.0	0.000 000	-0.0036
100 %		+10	836 599 993	-4.0	0.000 000	-0.0047
100 %		+30	836 599 993	-3.6	0.000 000	-0.0043
100 %		+40	836 599 994	-2.9	0.000 000	-0.0035
100 %		+50	836 599 994	-3.0	0.000 000	-0.0036
Batt. Endpoint	3.400	+20	836 599 994	-2.8	0.000 000	-0.0033

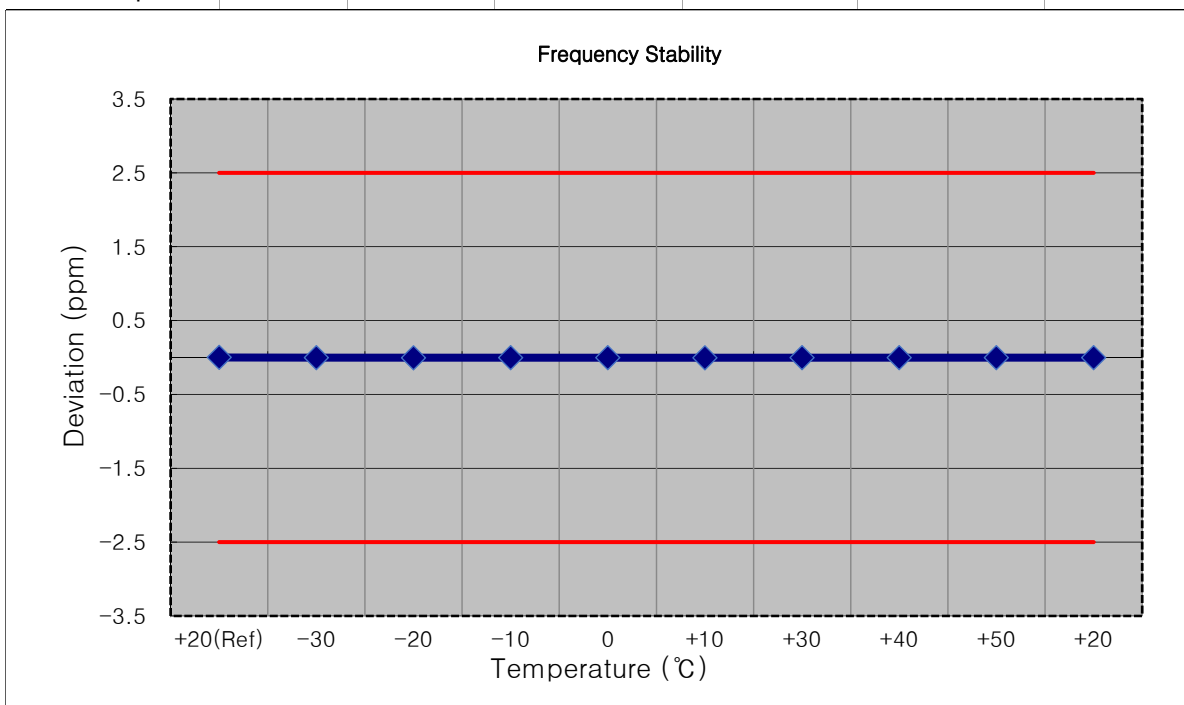


Mode:	WCDMA1900
OPERATING FREQUENCY:	1,852,400,000 Hz
CHANNEL:	9262
REFERENCE VOLTAGE:	3.860 VDC
DEVIATION LIMIT:	Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	1852 399 995	0.0	0.000 000	0.0000
100 %		-30	1852 399 990	-4.7	0.000 000	-0.0025
100 %		-20	1852 399 989	-5.8	0.000 000	-0.0031
100 %		-10	1852 399 990	-5.2	0.000 000	-0.0028
100 %		0	1852 399 991	-3.5	0.000 000	-0.0019
100 %		+10	1852 399 990	-4.5	0.000 000	-0.0024
100 %		+30	1852 399 989	-5.8	0.000 000	-0.0031
100 %		+40	1852 399 989	-5.5	0.000 000	-0.0030
100 %		+50	1852 399 989	-5.3	0.000 000	-0.0029
Batt. Endpoint	3.400	+20	1852 399 991	-4.0	0.000 000	-0.0022

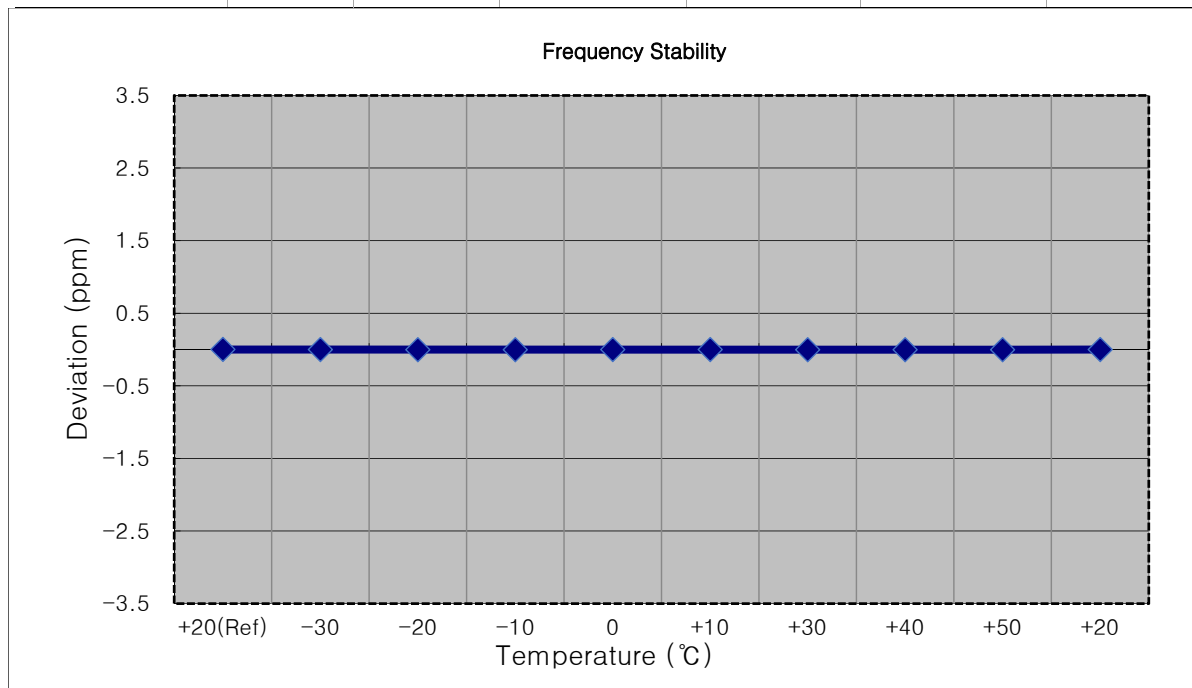


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,880,000,000 Hz
- ▣ CHANNEL: 9400
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	1880 000 004	0.0	0.000 000	0.0000
100 %		-30	1880 000 008	4.1	0.000 000	0.0022
100 %		-20	1880 000 009	5.0	0.000 000	0.0027
100 %		-10	1880 000 007	3.3	0.000 000	0.0017
100 %		0	1880 000 009	4.5	0.000 000	0.0024
100 %		+10	1880 000 007	3.2	0.000 000	0.0017
100 %		+30	1880 000 007	2.5	0.000 000	0.0013
100 %		+40	1880 000 007	3.2	0.000 000	0.0017
100 %		+50	1880 000 007	3.1	0.000 000	0.0016
Batt. Endpoint	3.400	+20	1880 000 007	3.3	0.000 000	0.0017

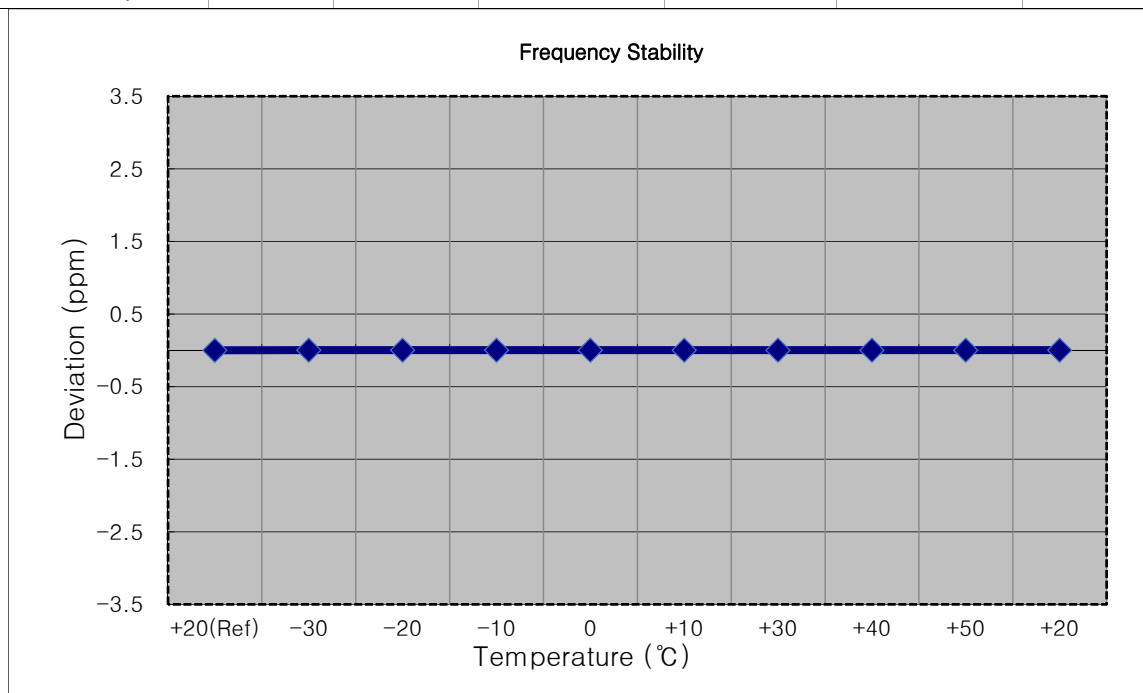


Mode:	WCDMA1900
OPERATING FREQUENCY:	1,907,600,000 Hz
CHANNEL:	9538
REFERENCE VOLTAGE:	3.860 VDC
DEVIATION LIMIT:	Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	1907 599 997	0.0	0.000 000	0.0000
100 %		-30	1907 599 993	-3.8	0.000 000	-0.0020
100 %		-20	1907 599 994	-3.0	0.000 000	-0.0015
100 %		-10	1907 599 993	-3.9	0.000 000	-0.0020
100 %		0	1907 599 993	-3.8	0.000 000	-0.0020
100 %		+10	1907 599 994	-3.0	0.000 000	-0.0016
100 %		+30	1907 599 993	-3.5	0.000 000	-0.0018
100 %		+40	1907 599 994	-2.5	0.000 000	-0.0013
100 %		+50	1907 599 994	-2.9	0.000 000	-0.0015
Batt. Endpoint	3.400	+20	1907 599 994	-2.3	0.000 000	-0.0012

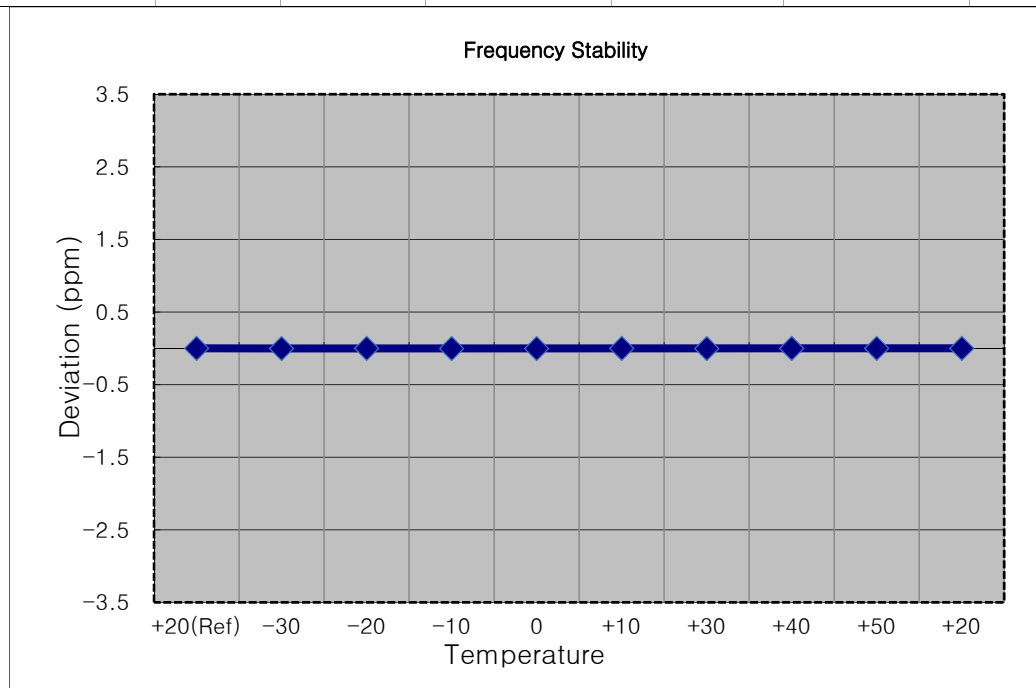


- ▣ Mode: WCDMA1700
- ▣ OPERATING FREQUENCY: 1,712,400,000 Hz
- ▣ CHANNEL: 1312
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	1712 400 004	0.0	0.000 000	0.0000
100 %		-30	1712 400 008	4.0	0.000 000	0.0023
100 %		-20	1712 400 008	4.1	0.000 000	0.0024
100 %		-10	1712 400 009	4.5	0.000 000	0.0026
100 %		0	1712 400 007	2.7	0.000 000	0.0016
100 %		+10	1712 400 010	6.3	0.000 000	0.0037
100 %		+30	1712 400 008	4.2	0.000 000	0.0025
100 %		+40	1712 400 009	5.1	0.000 000	0.0030
100 %		+50	1712 400 008	4.0	0.000 000	0.0024
Batt. Endpoint	3.400	+20	1712 400 009	4.6	0.000 000	0.0027

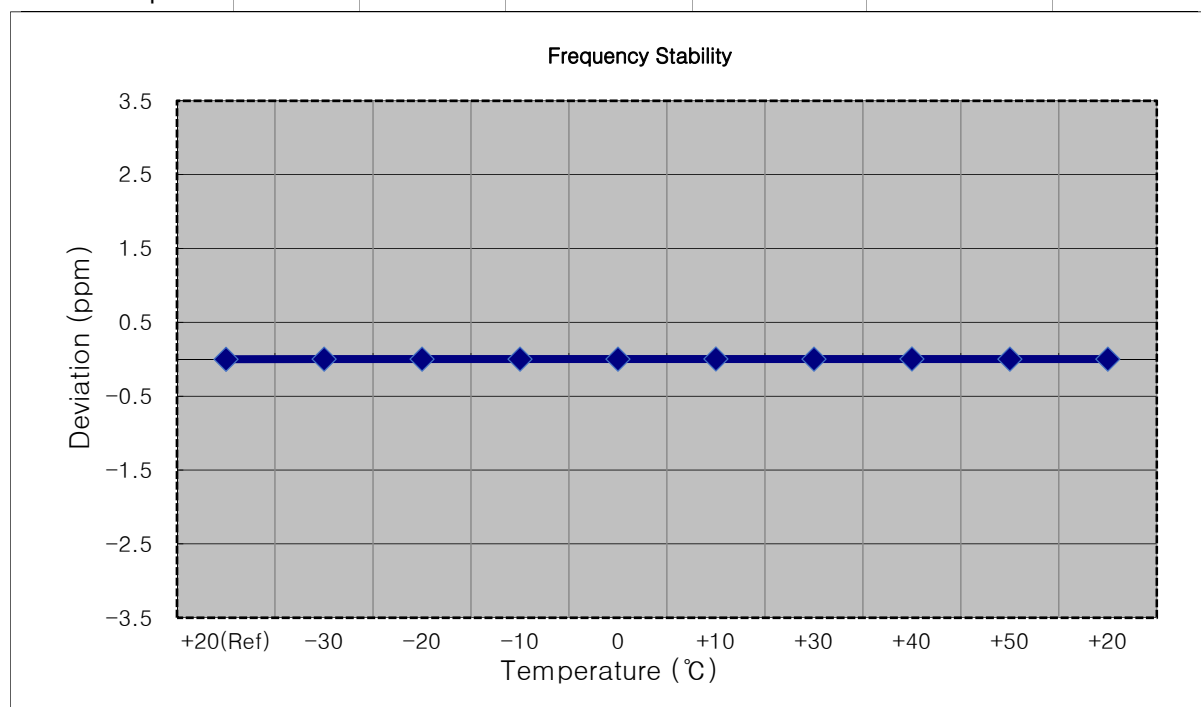


Mode: WCDMA1700
 OPERATING FREQUENCY: 1,732,400,000 Hz
 CHANNEL: 1412
 REFERENCE VOLTAGE: 3.860 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1732 399 995	0.0	0.000 000	0.0000
100 %		-30	1732 399 989	-5.5	0.000 000	-0.0032
100 %		-20	1732 399 989	-5.7	0.000 000	-0.0033
100 %		-10	1732 399 989	-5.6	0.000 000	-0.0032
100 %		0	1732 399 989	-5.6	0.000 000	-0.0032
100 %		+10	1732 399 988	-6.5	0.000 000	-0.0037
100 %		+30	1732 399 987	-7.9	0.000 000	-0.0046
100 %		+40	1732 399 988	-6.5	0.000 000	-0.0038
100 %		+50	1732 399 990	-5.0	0.000 000	-0.0029
Batt. Endpoint	3.400	+20	1732 399 990	-4.4	0.000 000	-0.0025

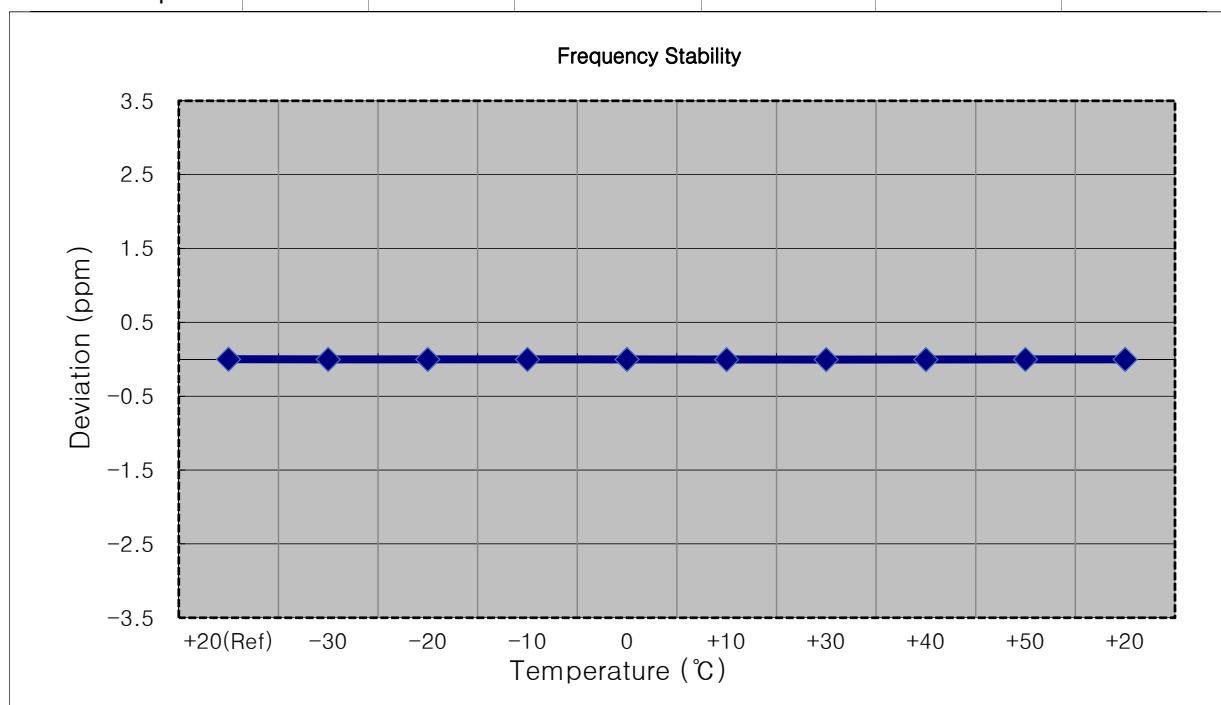

Mode: WCDMA1700
 OPERATING FREQUENCY: 1,752,600,000 Hz
 CHANNEL: 1513
 REFERENCE VOLTAGE: 3.860 VDC
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	1752 599 994	0.0	0.000 000	0.0000
100 %		-30	1752 599 988	-5.6	0.000 000	-0.0032
100 %		-20	1752 599 989	-5.2	0.000 000	-0.0030
100 %		-10	1752 599 987	-6.7	0.000 000	-0.0038
100 %		0	1752 599 988	-5.7	0.000 000	-0.0033
100 %		+10	1752 599 988	-5.8	0.000 000	-0.0033
100 %		+30	1752 599 988	-5.5	0.000 000	-0.0031
100 %		+40	1752 599 988	-5.7	0.000 000	-0.0032
100 %		+50	1752 599 988	-5.4	0.000 000	-0.0031
Batt. Endpoint	3.400	+20	1752 599 989	-5.3	0.000 000	-0.0030

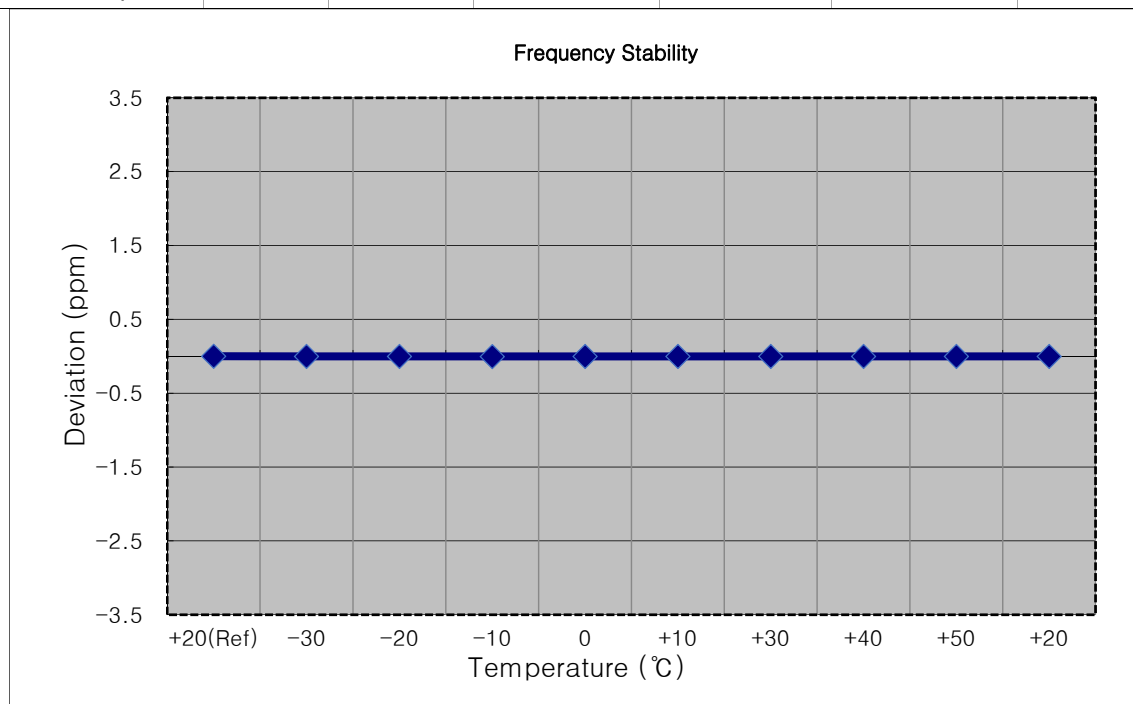


9. TEST PLOTS

■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth




■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

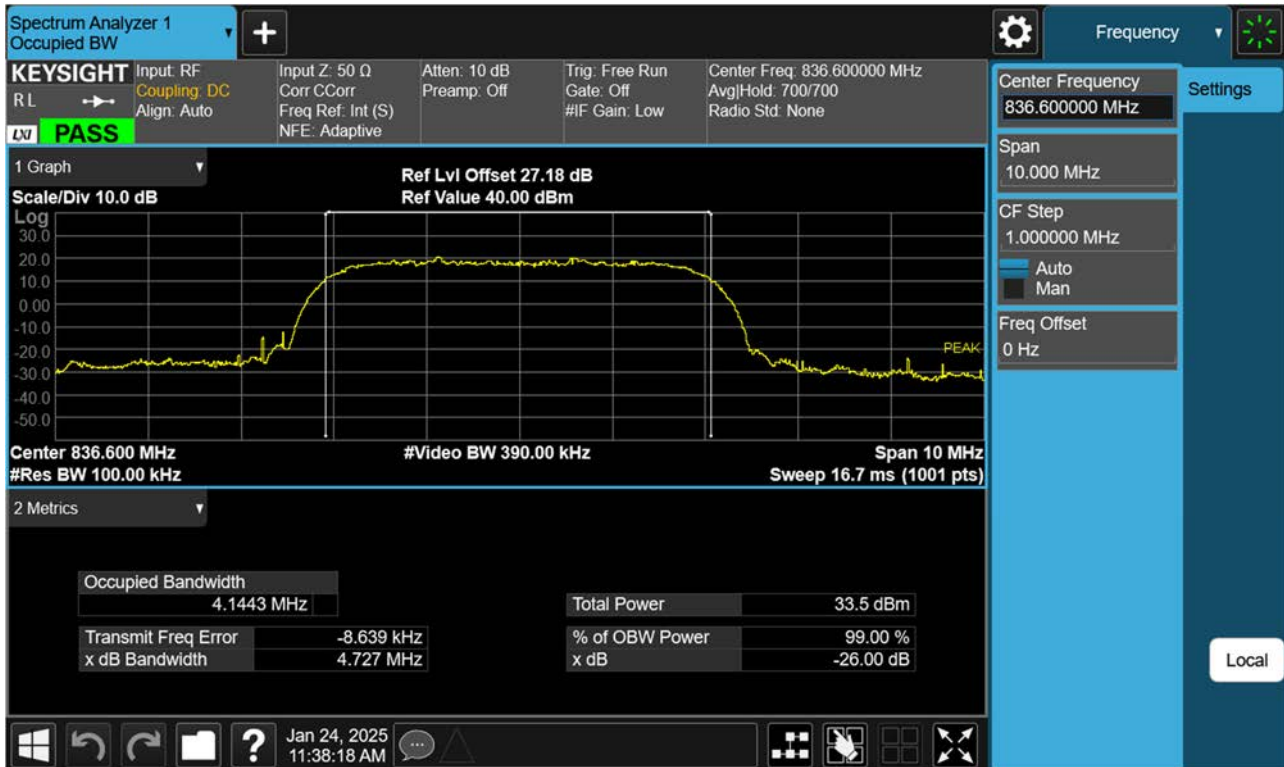

■ WCDMA850MODE (4233 CH.) Occupied Bandwidth




■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

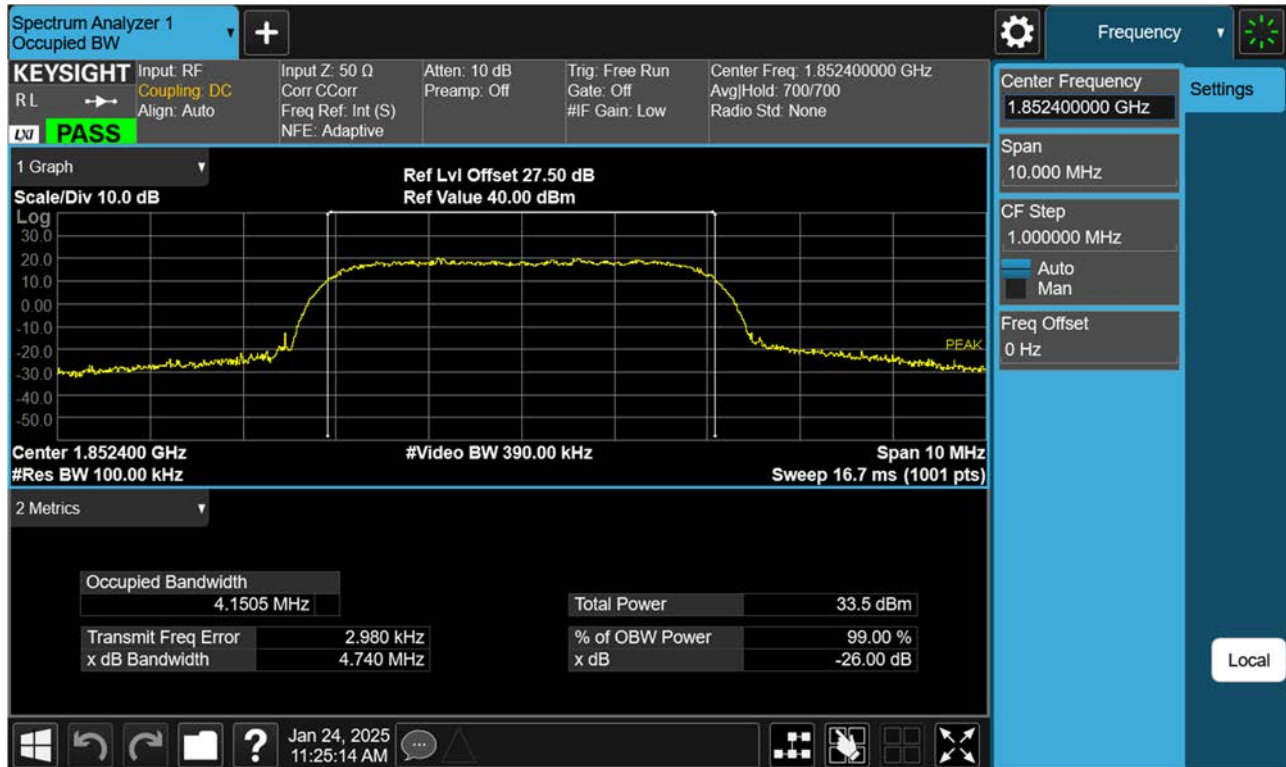


■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth



WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

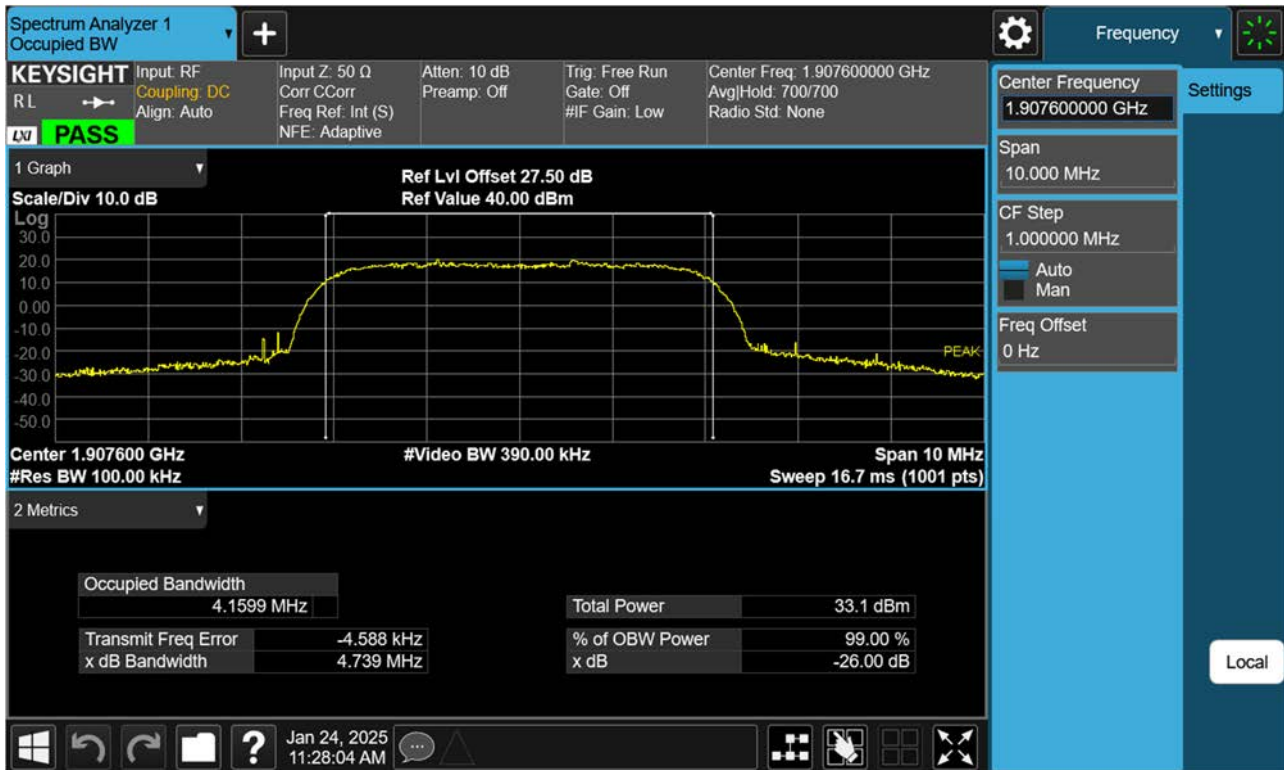


■ WCDMA1700 MODE (1312 CH.) Occupied Bandwidth

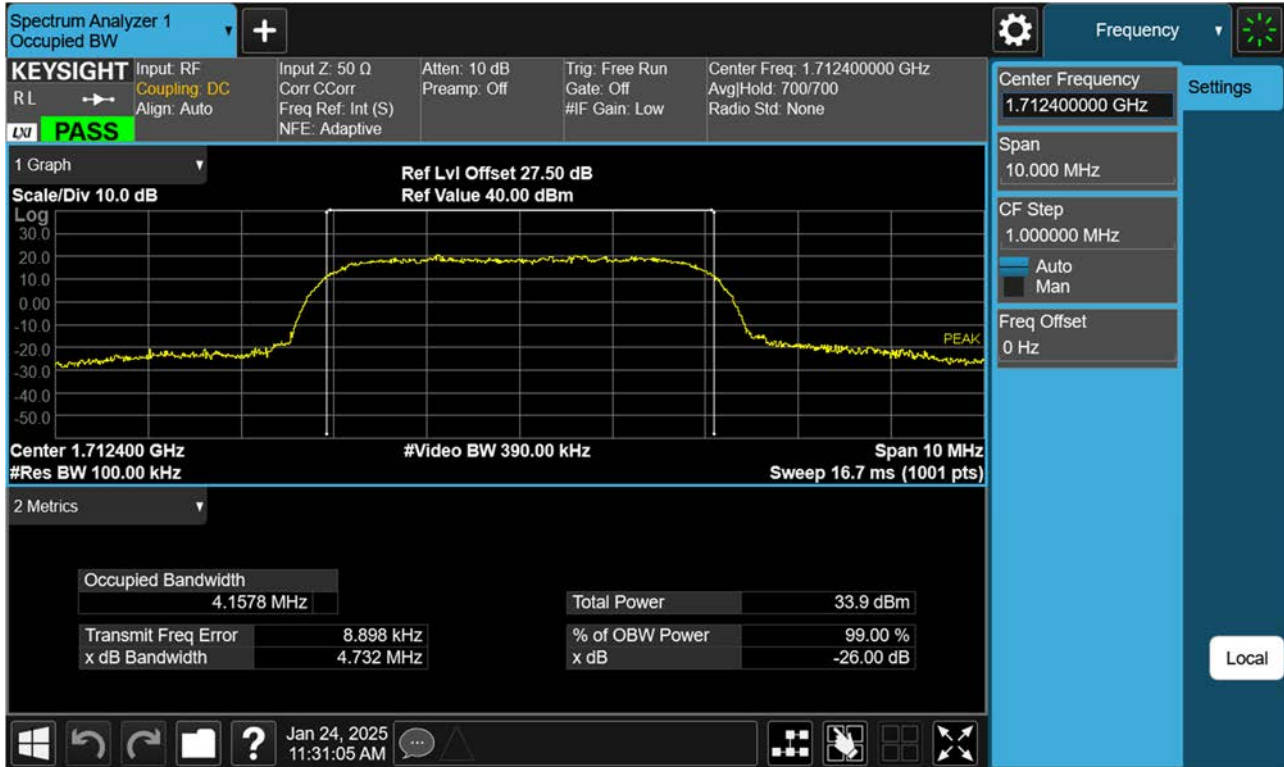


■ WCDMA1700 MODE (1412 CH.) Occupied Bandwidth




■ WCDMA1700 MODE (1513 CH.) Occupied Bandwidth

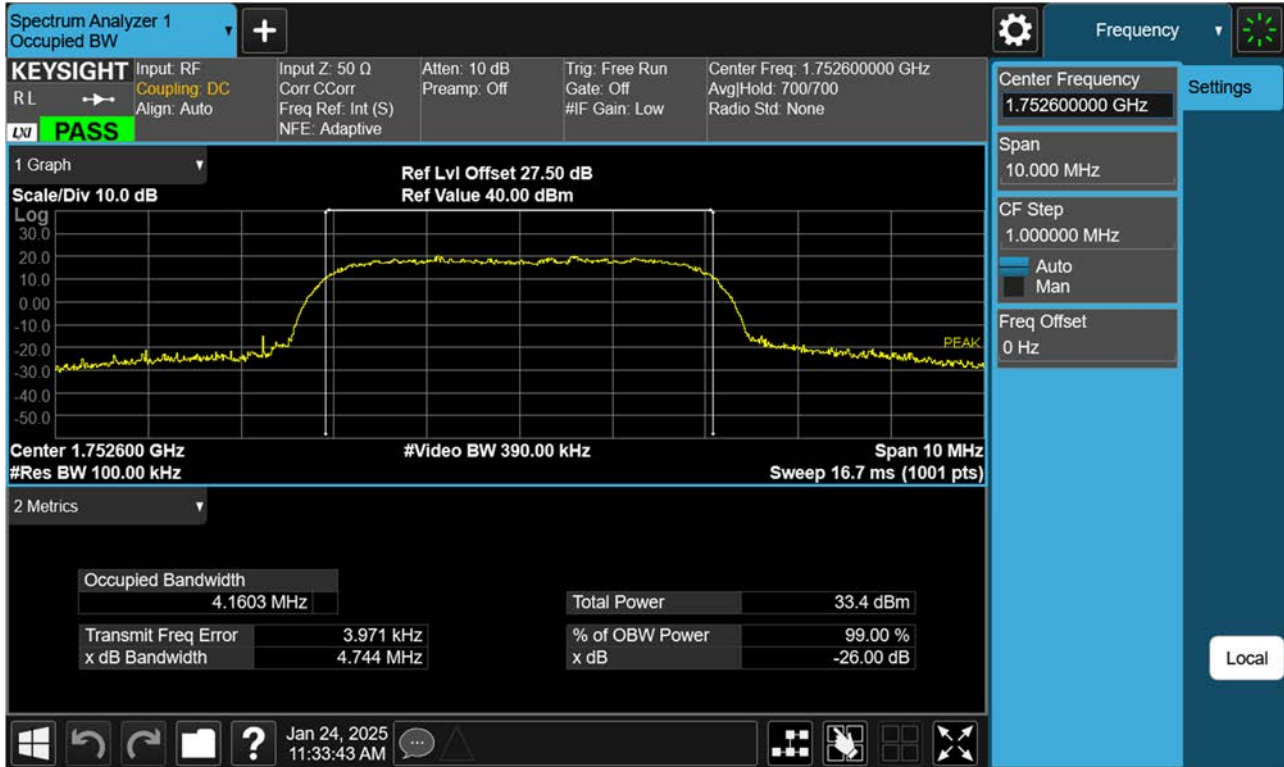


■ WCDMA850 MODE (4408 CH.) Peak-to-Average Ratio

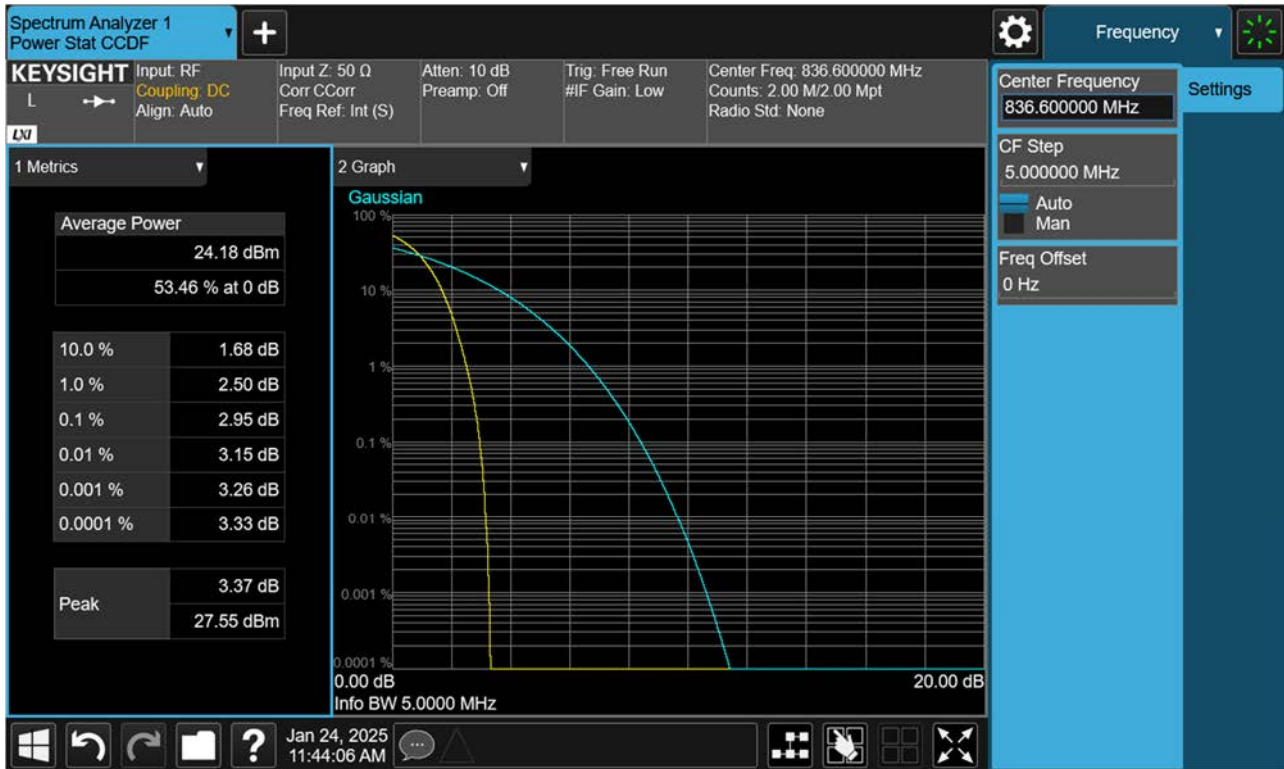

■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

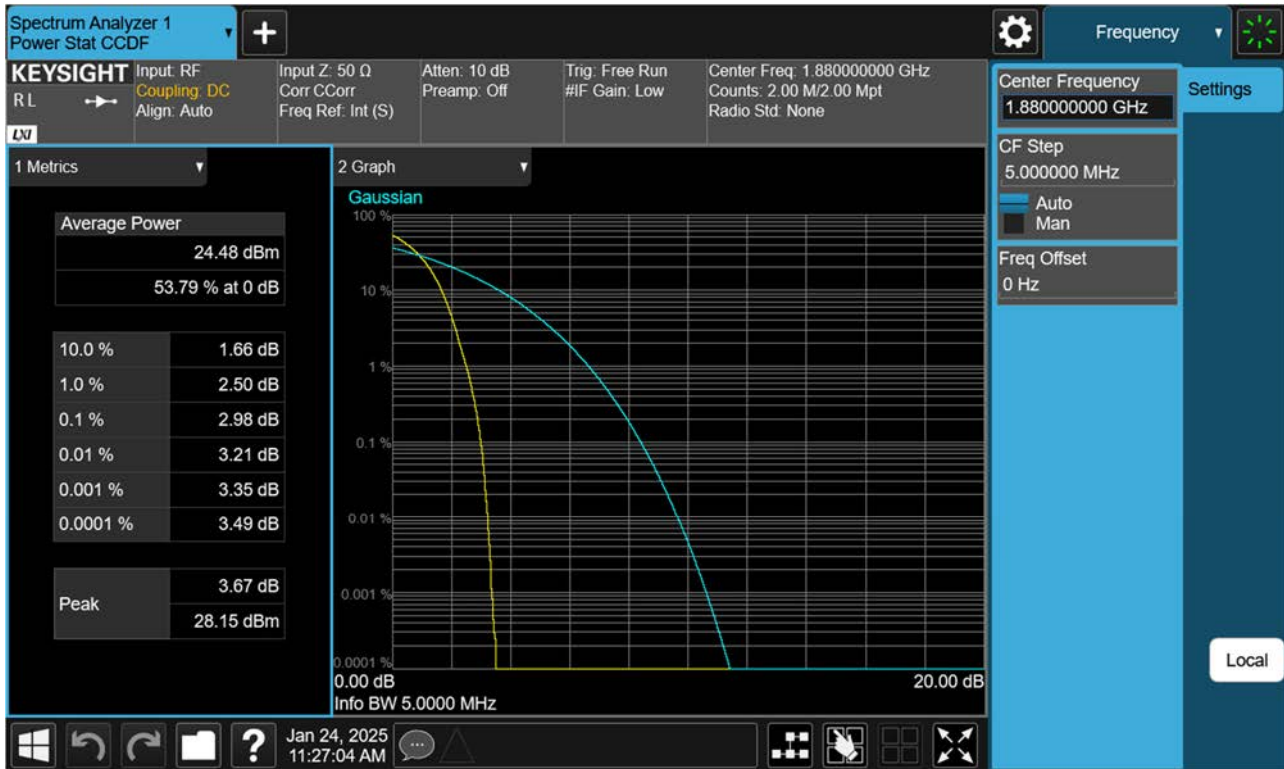

■ WCDMA1700 MODE (1412 CH.) Peak-to-Average Ratio

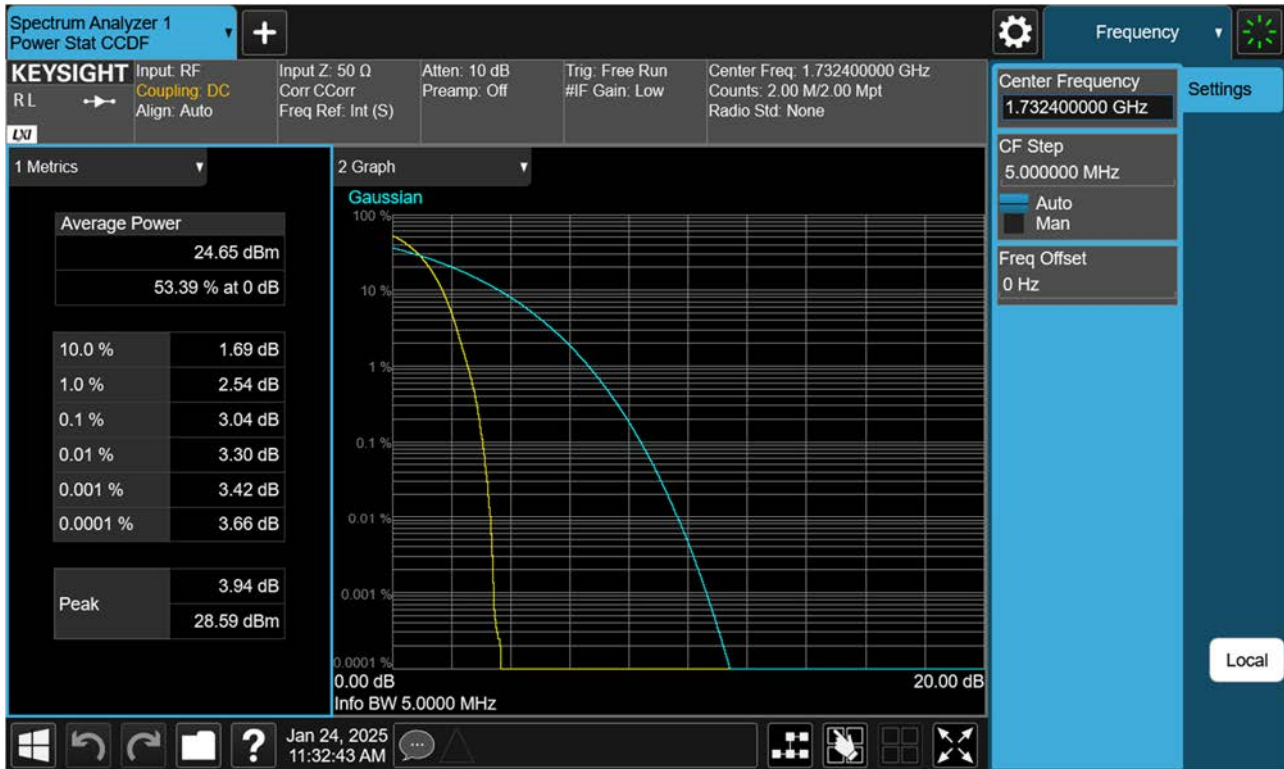

■ WCDMA850 MODE (4132 CH.) Block Edge



■ WCDMA850 MODE (4132 CH.) – 4 MHz Span



■ WCDMA850MODE (4233 CH.) Block Edge



■ WCDMA850MODE (4233 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9262 CH.) Block Edge



■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9538 CH.) Block Edge



■ WCDMA1900 MODE (9538 CH.) – 4 MHz Span



■ WCDMA1700 MODE (1312 CH.) Block Edge



■ WCDMA1700 MODE (1312 CH.) – 4 MHz Span




■ WCDMA1700 MODE (1513 CH.) Block Edge




■ WCDMA1700 MODE (1513 CH.) – 4 MHz Span




■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions

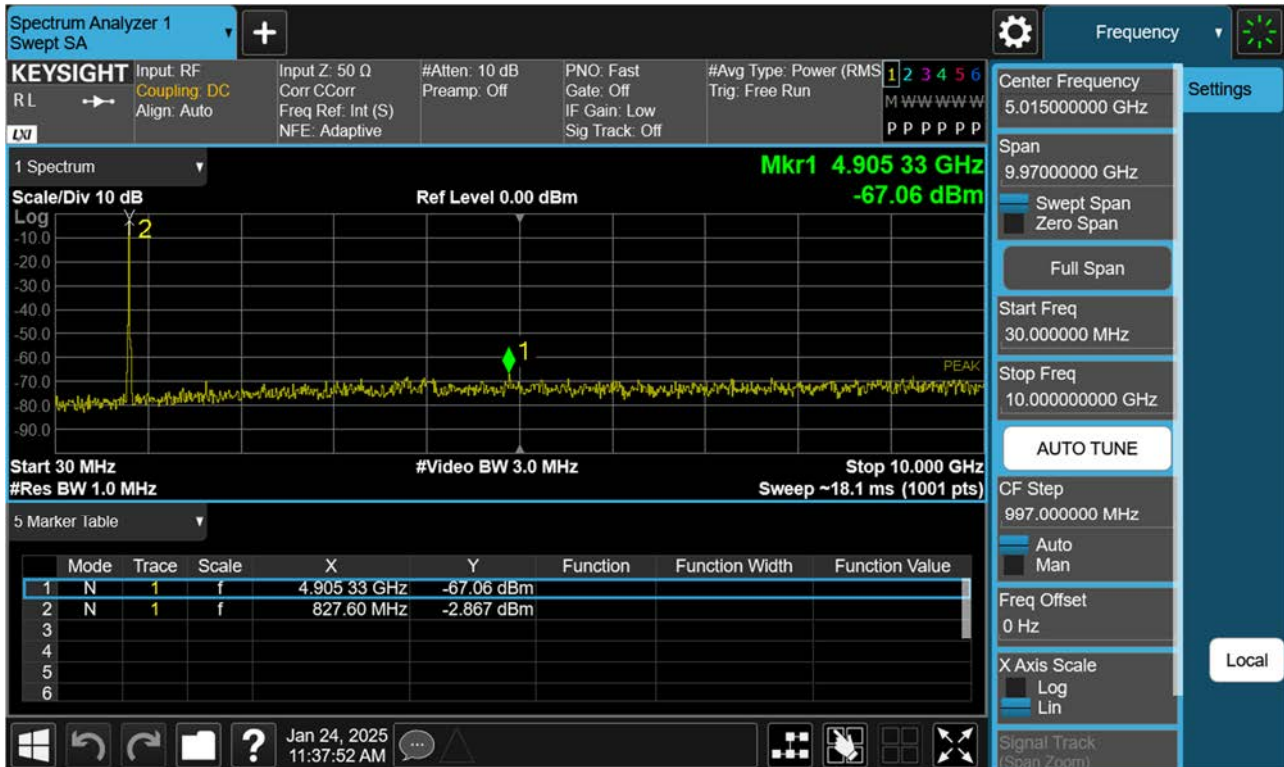


WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions

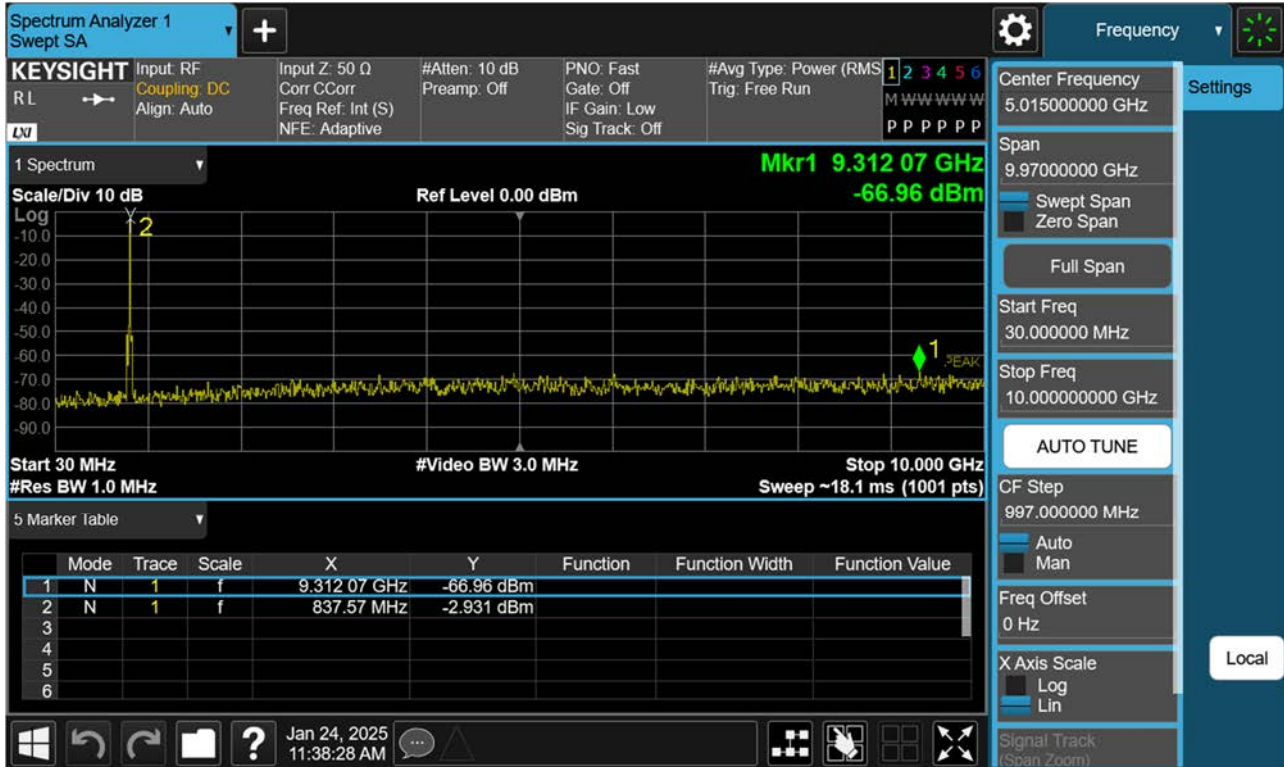


■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions

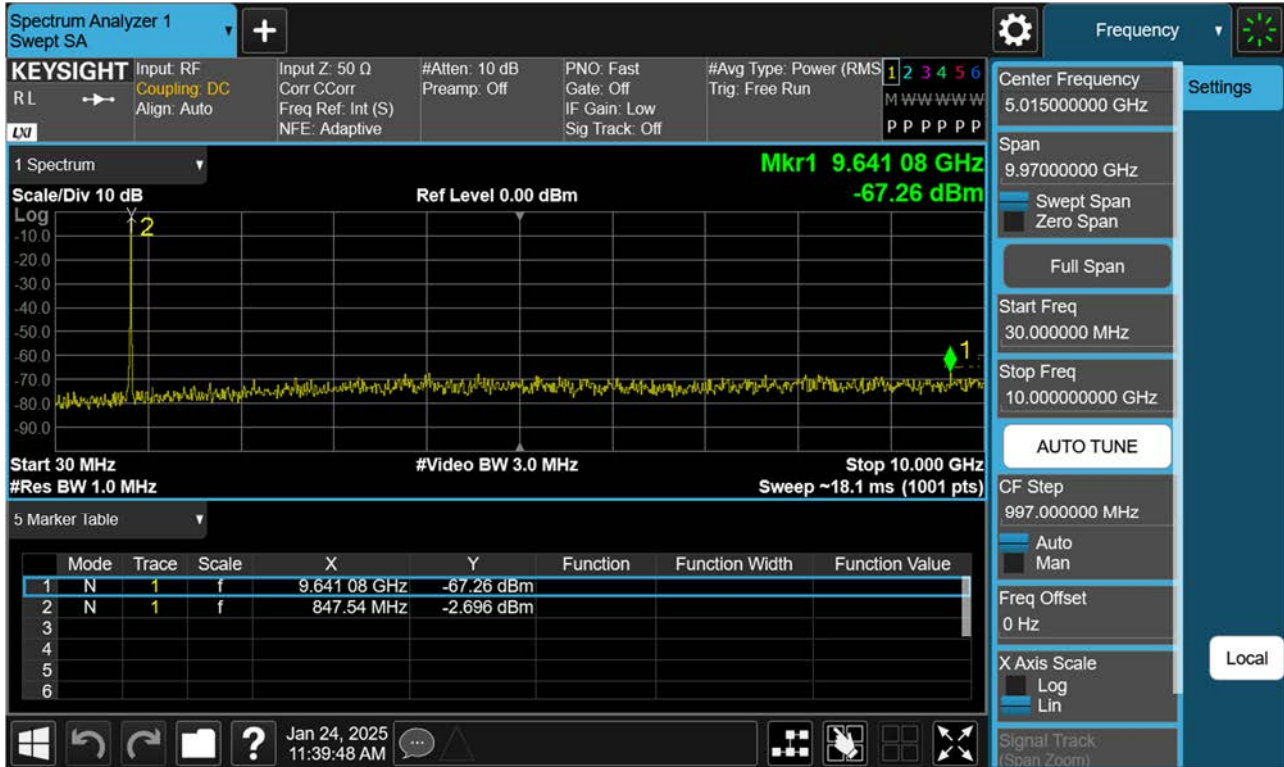


WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

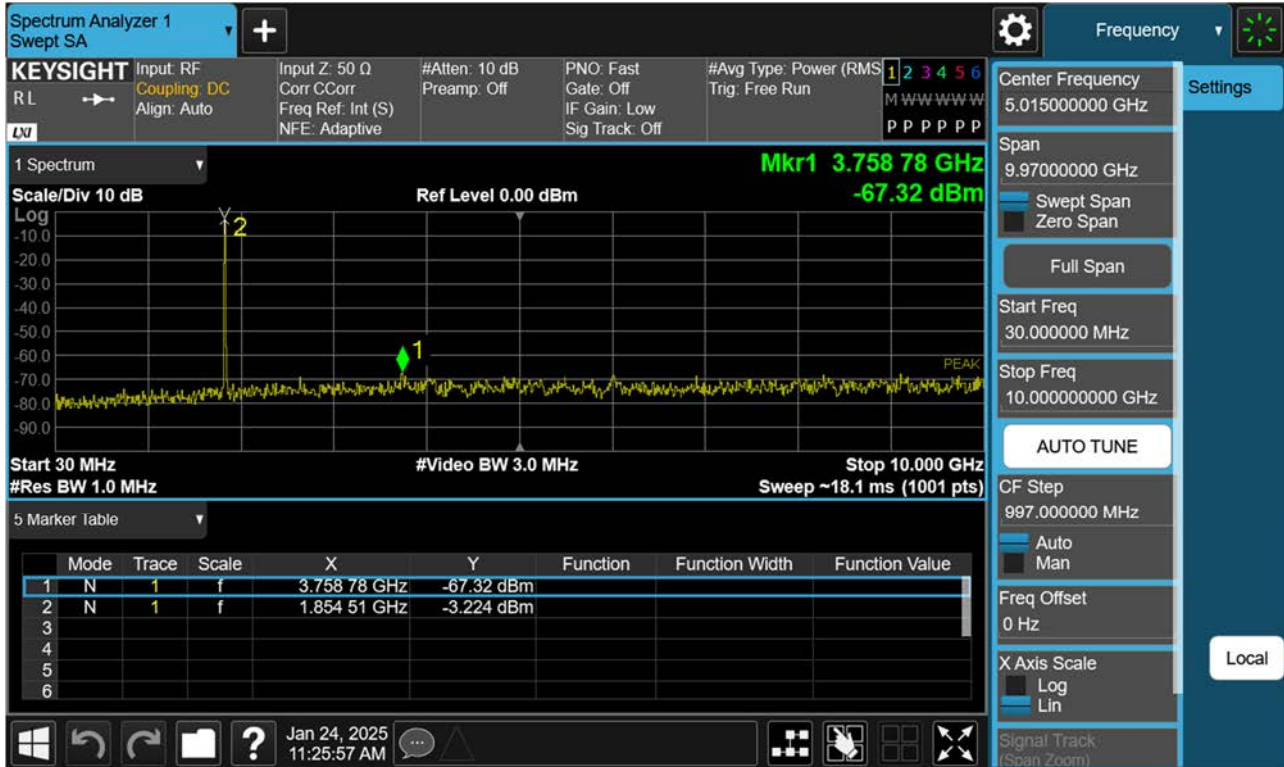


WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions2

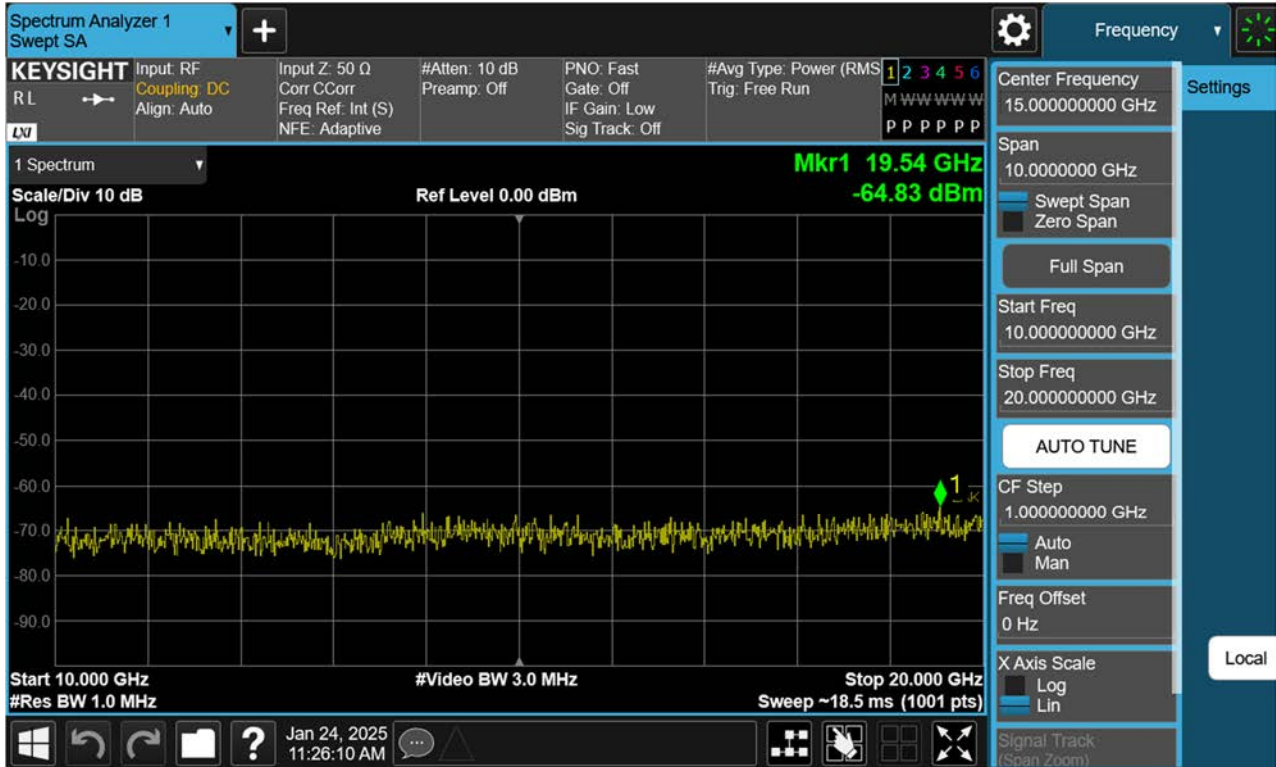


■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1

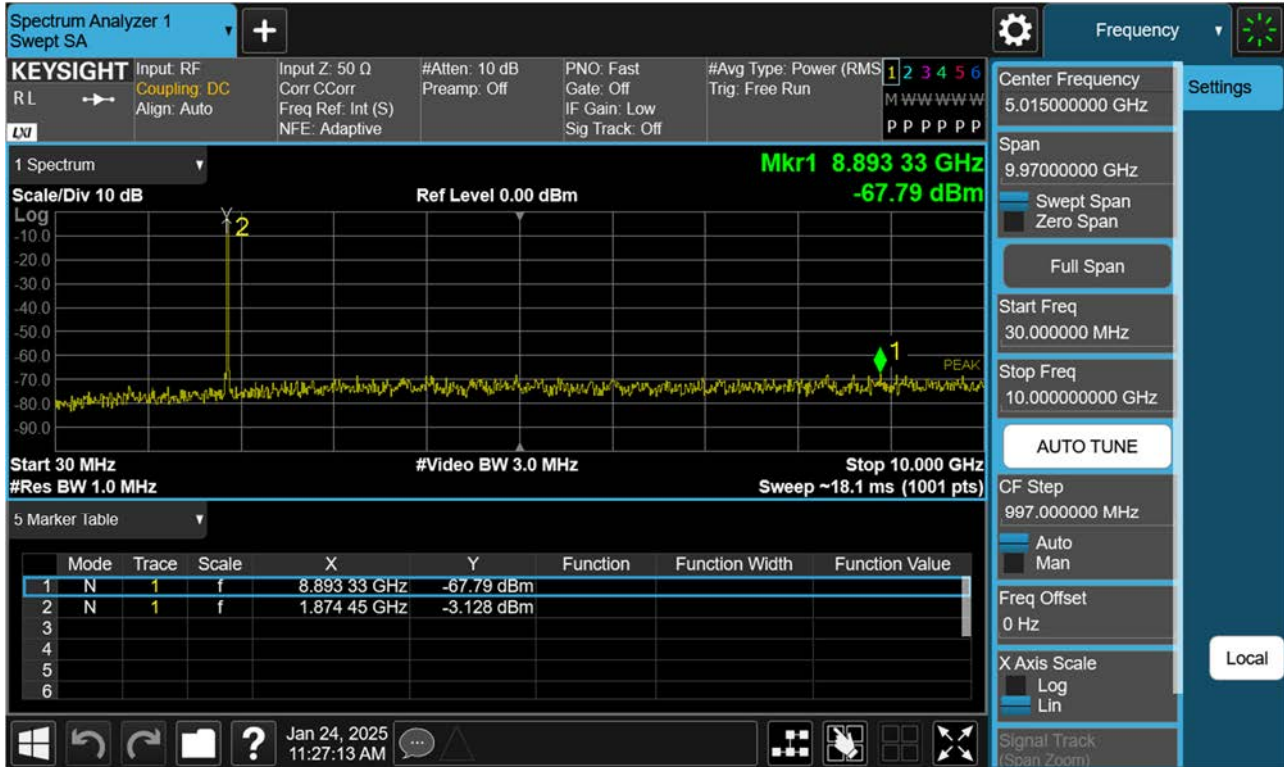


WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions2

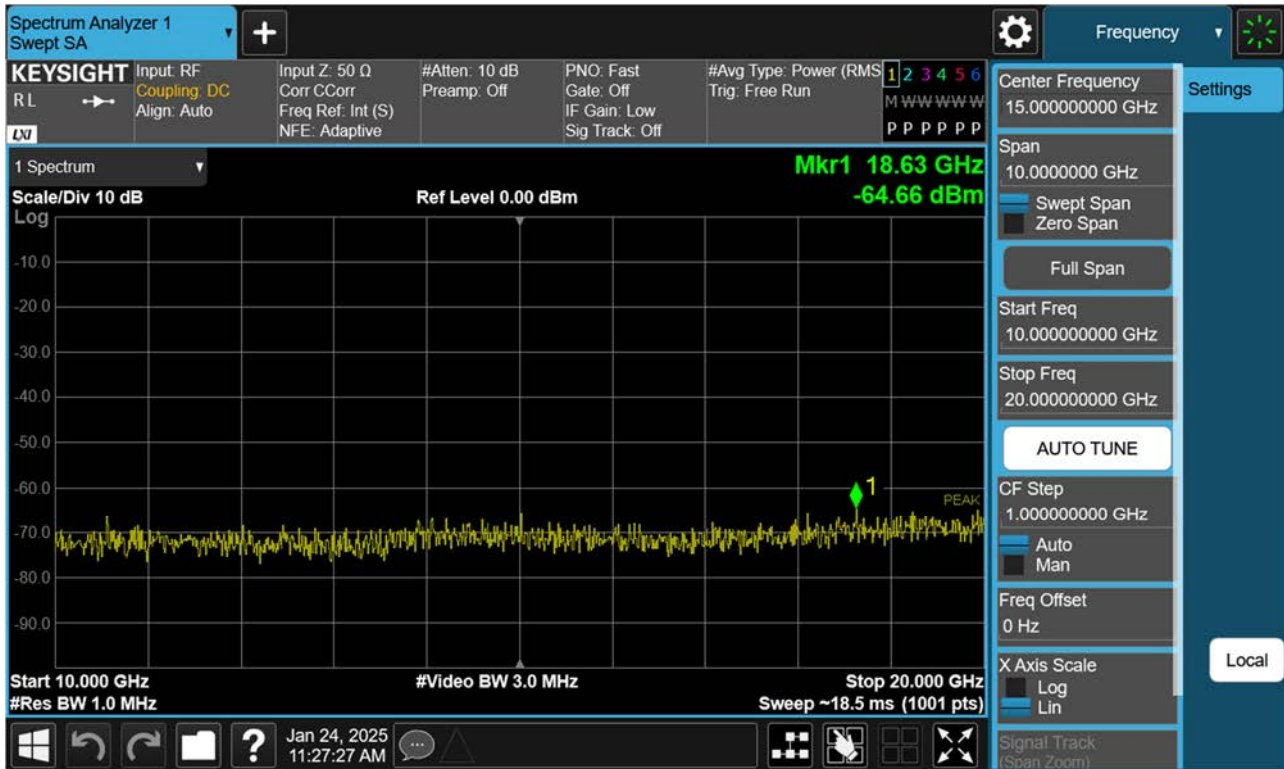


■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

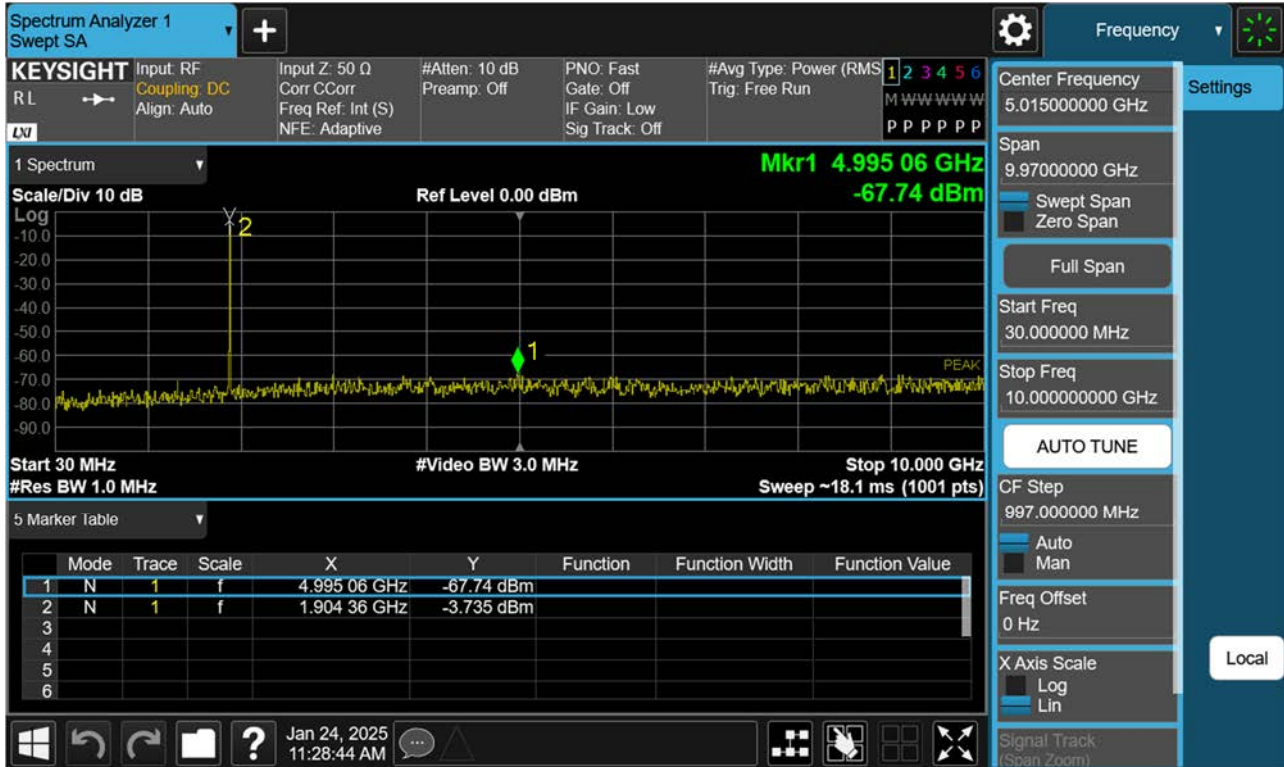

WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions2

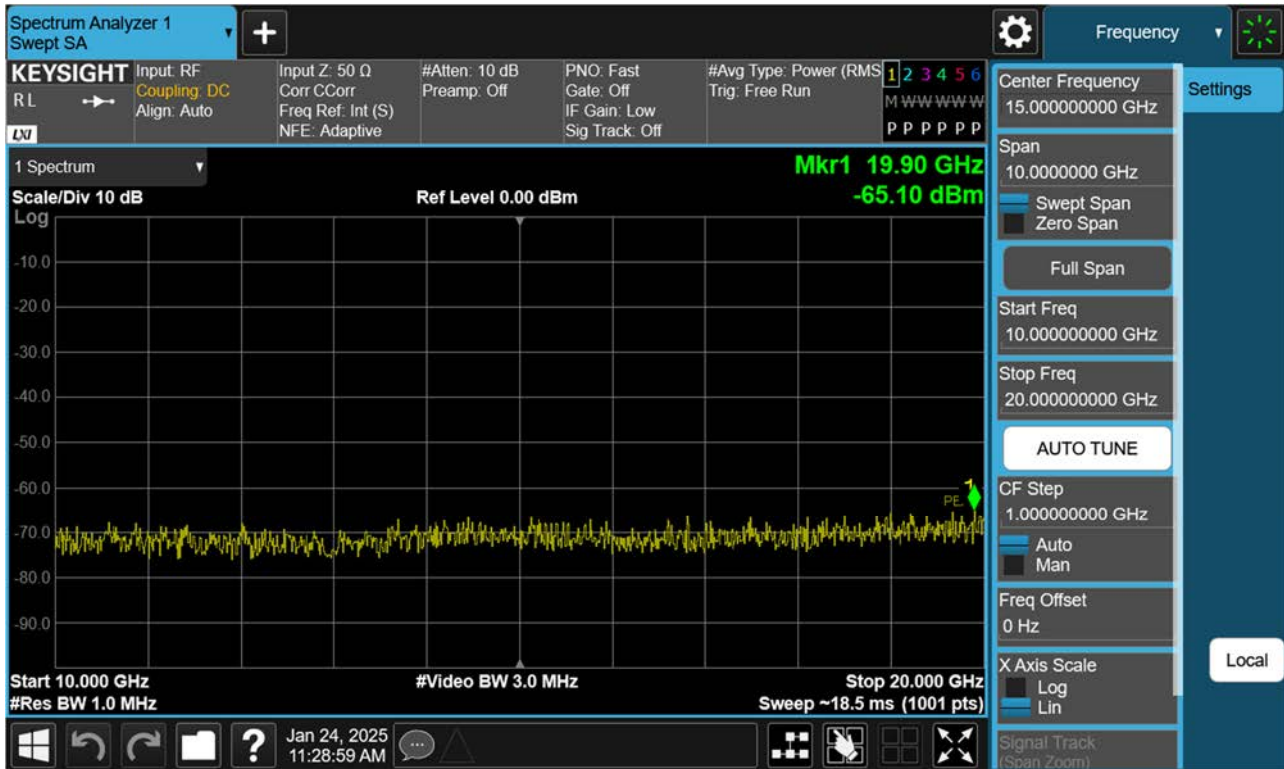


■ WCDMA1700 MODE (1312 CH.) Conducted Spurious Emissions1

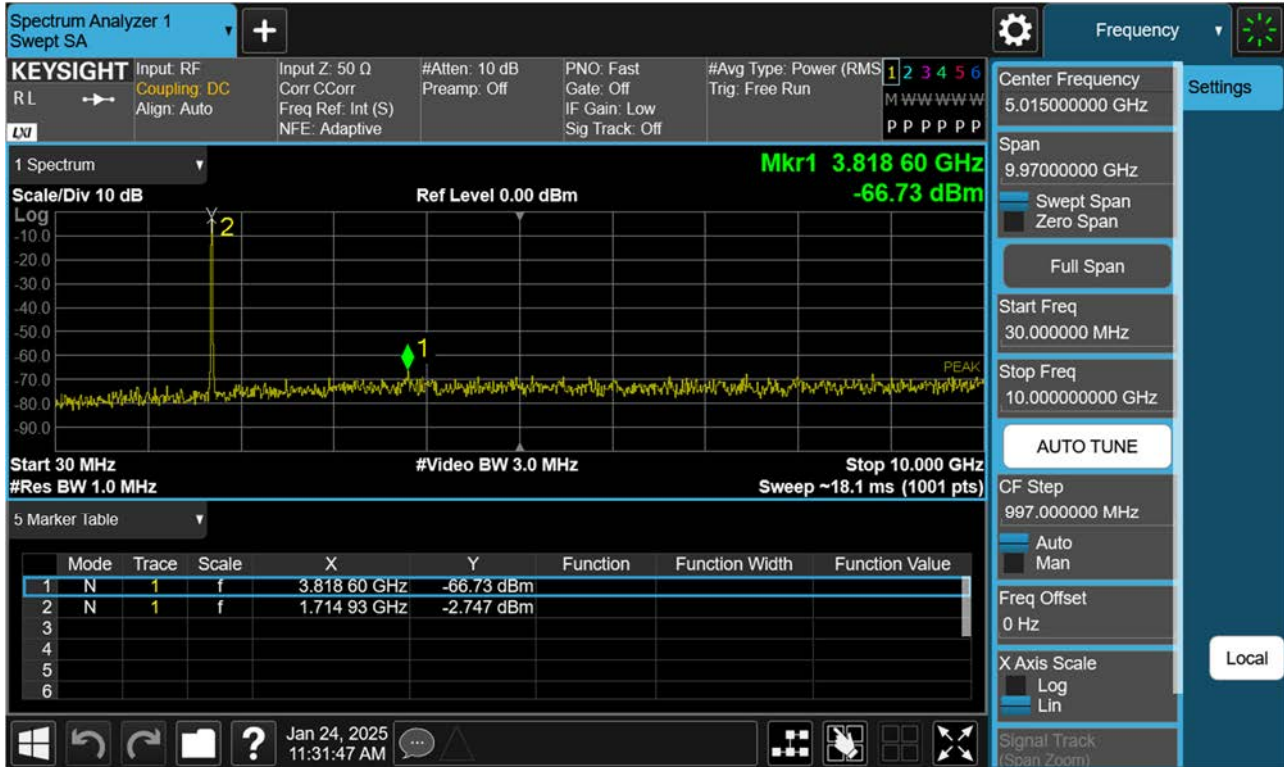


WCDMA1700 MODE (1312 CH.) Conducted Spurious Emissions2




WCDMA1700 MODE (1412 CH.) Conducted Spurious Emissions1

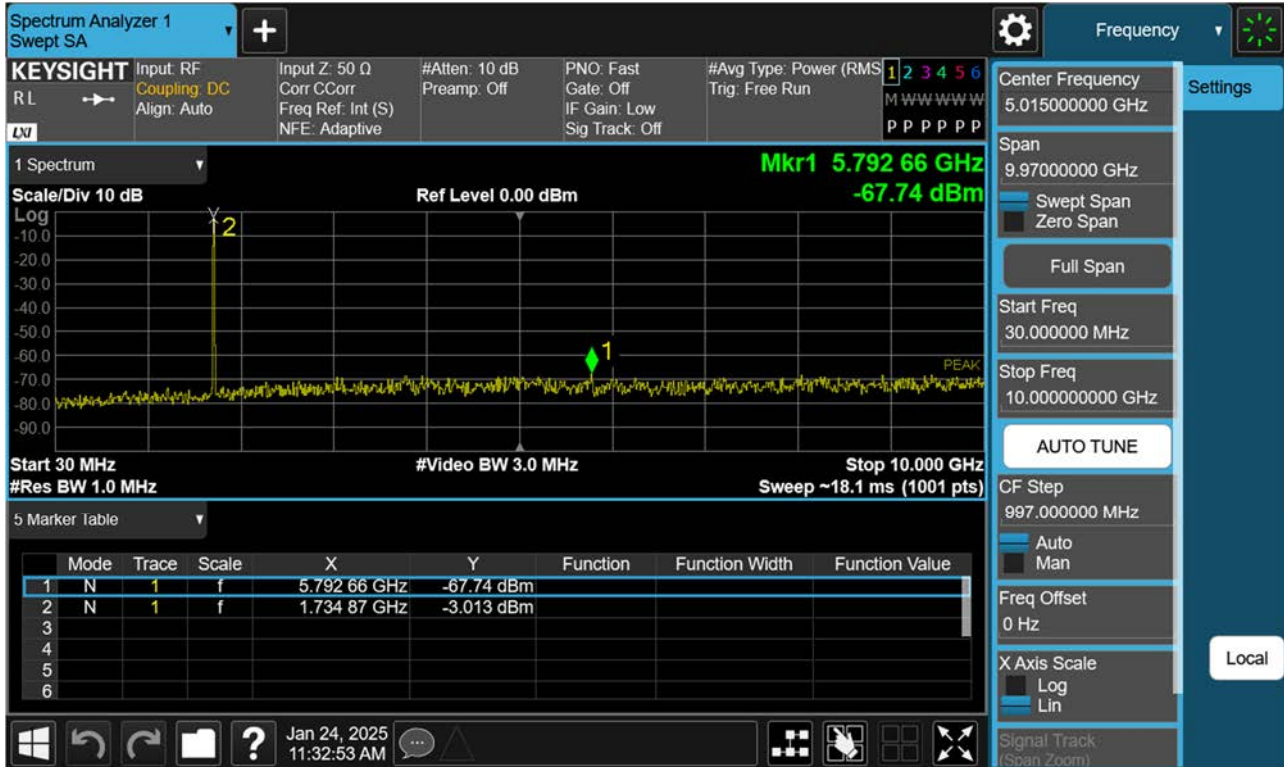


WCDMA1700 MODE (1412 CH.) Conducted Spurious Emissions2

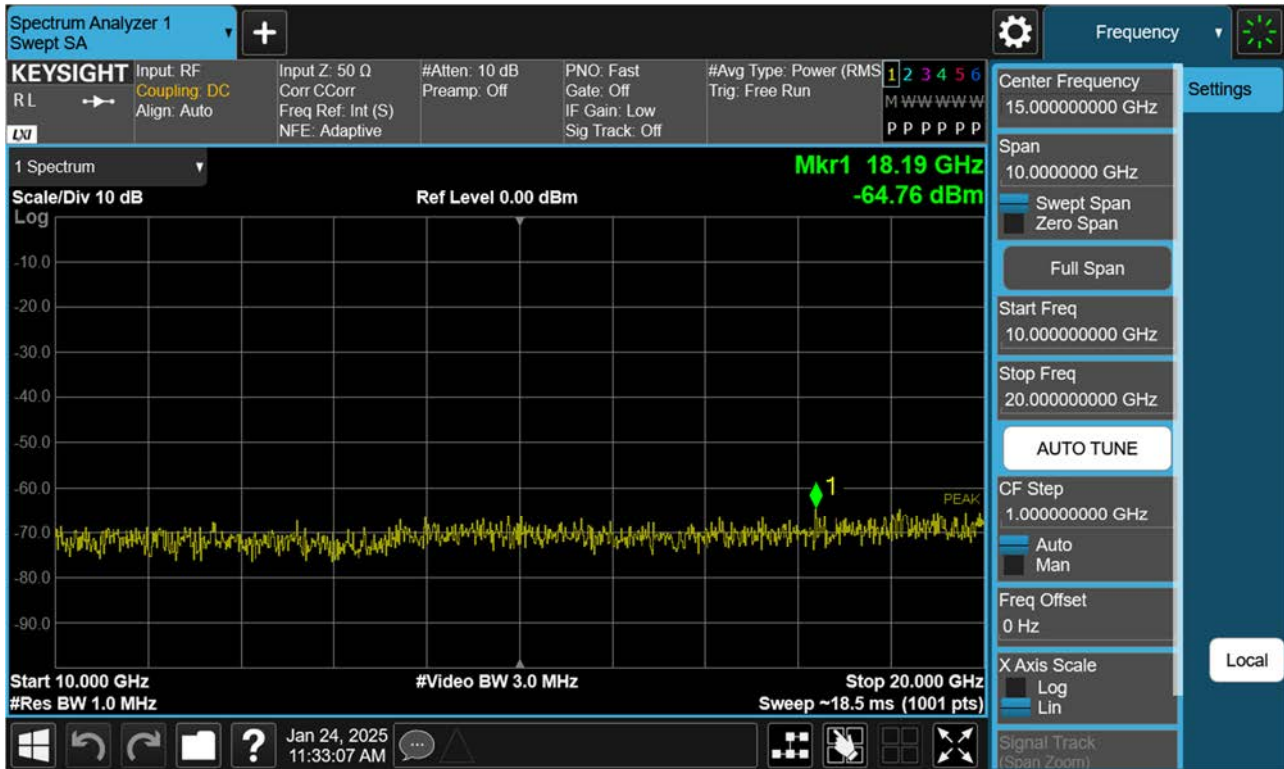

WCDMA1700 MODE (1513 CH.) Conducted Spurious Emissions1

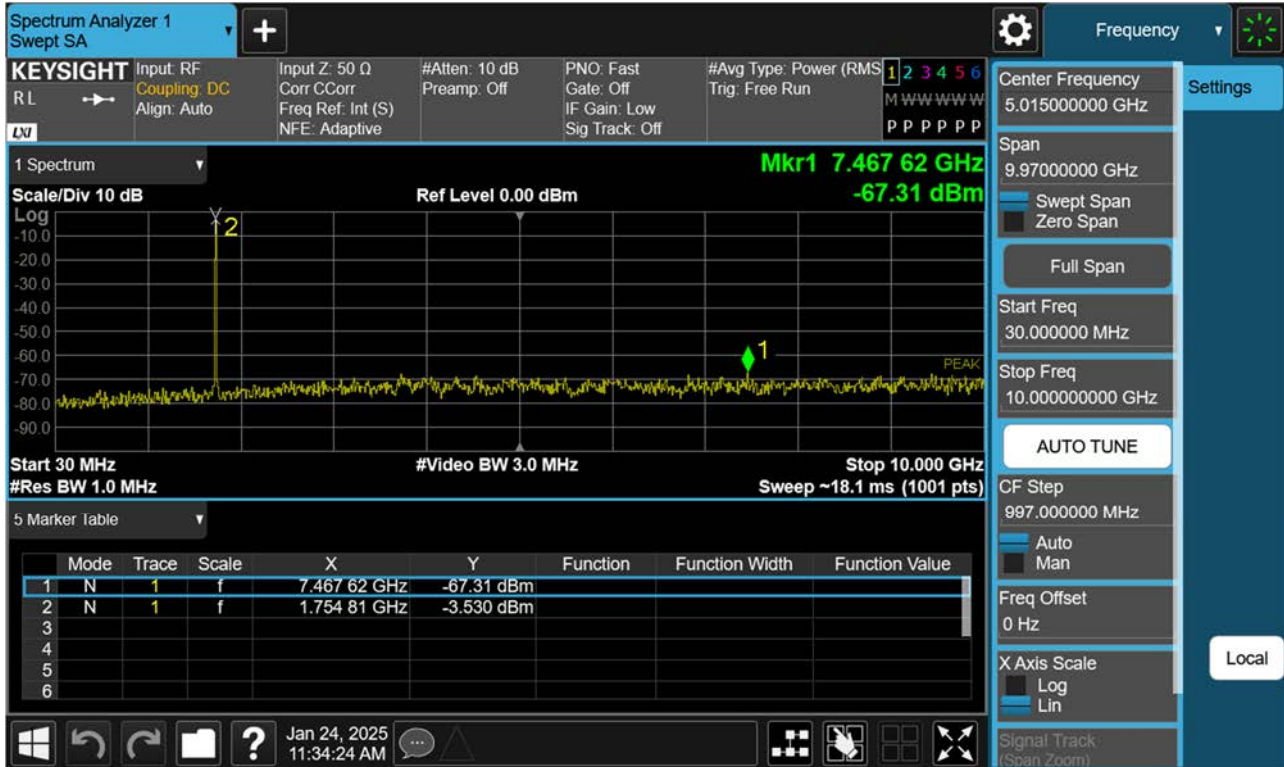

WCDMA1700 MODE (1513 CH.) Conducted Spurious Emissions2

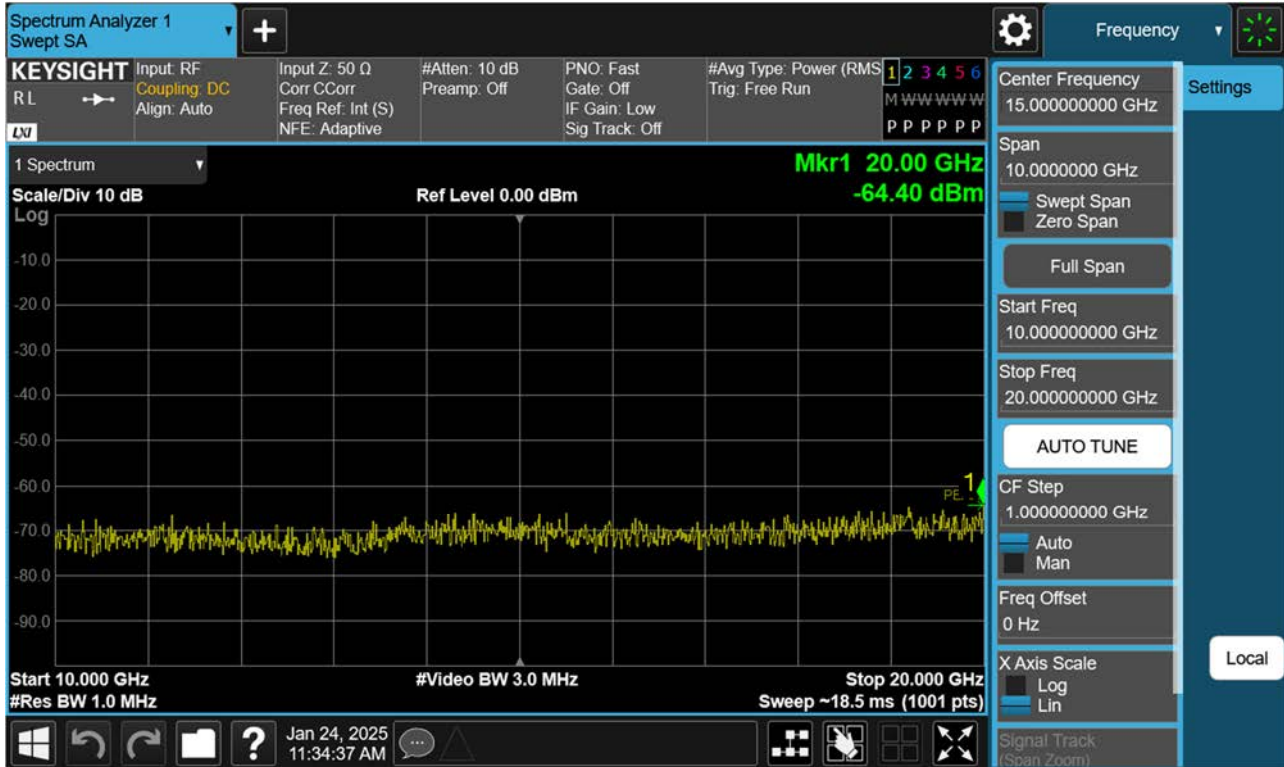

10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2502-FC002-P