

TEST REPORT

FCC LTE B26(Part90) Test for SM-X528U
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2502-FC009

DATE OF ISSUE
February 10, 2025

Tested by
Jae Mun Do



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2502-FC009

DATE OF ISSUE

February 10, 2025

Applicant**SAMSUNG Electronics Co., Ltd.**

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name

Tablet

Model Name

SM-X528U

Date of Test

January 02, 2025 ~ February 07, 2025

FCC ID

A3LSMX528U

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

FCC Classification:

PCS Licensed Transmitter (PCB)

Test Standard Used

FCC Rule Part: § 90, § 22

Test Results

PASS

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	February 10, 2025	Initial Release

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. GENERAL INFORMATION	5
1.1. MAXIMUM OUTPUT POWER	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS	8
3.1 TEST PROCEDURE	8
3.2 CONDUCTED OUTPUT POWER	9
3.3 RADIATED POWER	10
3.4 RADIATED SPURIOUS EMISSIONS	11
3.5 OCCUPIED BANDWIDTH	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 CHANNEL EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.9 WORST CASE(RADIATED TEST)	17
3.10 WORST CASE(CONDUCTED TEST)	18
4. LIST OF TEST EQUIPMENT	19
5. MEASUREMENT UNCERTAINTY	20
6. SUMMARY OF TEST RESULTS	21
7. SAMPLE CALCULATION	22
8. TEST DATA	24
8.1 CONDUCTED OUTPUT POWER	24
8.2 EFFECTIVE RADIATED POWER	29
8.3 RADIATED SPURIOUS EMISSIONS	31
8.4 OCCUPIED BANDWIDTH	32
8.5 CONDUCTED SPURIOUS EMISSIONS	33
8.6 CHANNEL EDGE	33
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	34
8.8 STRADDLE CHANNEL	39
8.8.1 CONDUCTED OUTPUT POWER	39
8.8.2 EFFECTIVE RADIATED POWER	43
8.8.3 RADIATED SPURIOUS EMISSIONS	44
8.8.4 CONDUCTED SPURIOUS EMISSIONS	45
8.8.5 CHANNEL EDGE(Part90)	45
8.8.6 BAND EDGE(Part22)	45
9. TEST PLOTS	46
10. TEST PLOTS (STRADDLE CHANNEL)	95
11. ANNEX A_ TEST SETUP PHOTO	120

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMX528U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§ 90, § 22
EUT Type:	Tablet
Model(s):	SM-X528U
Tx Frequency:	814.7 MHz – 824.0 MHz (LTE – Band 26 (1.4 MHz)) 815.5 MHz – 824.0 MHz (LTE – Band 26 (3 MHz)) 816.5 MHz – 824.0 MHz (LTE – Band 26 (5 MHz)) 819.0 MHz – 824.0 MHz (LTE – Band 26 (10 MHz)) 821.5 MHz (LTE – Band 26 (15 MHz))
Date(s) of Tests:	January 02, 2025 ~ February 07, 2025
Serial number:	Radiated : R32XC00A68K Conducted : R32XC00A9JV

1.1. MAXIMUM OUTPUT POWER

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	Conducted Output Power	
				Max. Power (W)	Max. Power (dBm)
LTE – Band26 (1.4)	814.7 – 824.0	1M10G7D	QPSK	0.272	24.34
		1M09W7D	16QAM	0.230	23.62
		1M10W7D	64QAM	0.177	22.48
		1M09W7D	256QAM	0.088	19.46
LTE – Band26 (3)	815.5 – 824.0	2M72G7D	QPSK	0.274	24.37
		2M71W7D	16QAM	0.240	23.80
		2M71W7D	64QAM	0.179	22.54
		2M71W7D	256QAM	0.090	19.54
LTE – Band26 (5)	816.5 – 824.0	4M53G7D	QPSK	0.278	24.44
		4M51W7D	16QAM	0.245	23.89
		4M52W7D	64QAM	0.183	22.62
		4M55W7D	256QAM	0.092	19.62
LTE – Band26 (10)	819.0 – 824.0	9M00G7D	QPSK	0.282	24.51
		9M01W7D	16QAM	0.240	23.81
		8M99W7D	64QAM	0.186	22.69
		9M03W7D	256QAM	0.093	19.69
LTE – Band26 (15)	821.5	13M5G7D	QPSK	0.286	24.57
		13M5W7D	16QAM	0.237	23.75
		13M5W7D	64QAM	0.185	22.67
		13M5W7D	256QAM	0.094	19.71

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

Please refer to the [3G] Test Report.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Radiated Power	- ANSI C63.26-2015 – Section 5.2.4.4 - KDB 971168 D01 v03r01 – Section 5.8
Radiated Spurious and Harmonic Emissions	- ANSI C63.26-2015 – Section 5.5.3 - KDB 971168 D01 v03r01 – Section 5.8

3.2 CONDUCTED OUTPUT POWER

Test Overview


According to ANSI C63.26-2015 Section 5.2.1 when measuring the maximum RF output power from such devices, control over the EUT must be provided either through special test software (provided by manufacturer specifically for compliance testing, but not accessible by an end user) or through use of a base station emulator, communications test set, call box, or similar instrumentation that is capable of establishing a communications link with the EUT to enable control over variable parameters (e.g., output power, OBW, etc.).

In some cases, these instruments also include basic digital spectrum analyzer and/or power meter capabilities that can be utilized to measure the RF output power if the specified detectors and requirements can be realized and the measurement functions have been calibrated.

Test Procedure

1. The RF port of the EUT was connected to the Communication Tester via an RF cable.
2. Conducted average power was measured using a calibrated Radio Communication Tester.

Test setup

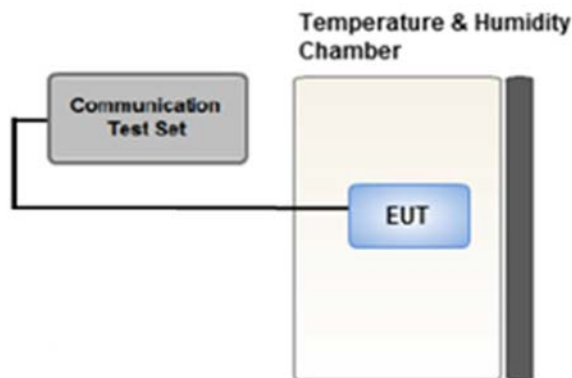

3.3 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq$ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.4 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq$ 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $>$ 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser
if no specific emissions from the EUT are recorded (ie: margin $>$ 20 dB from the applicable limit)
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets,
and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.
The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.5 OCCUPIED BANDWIDTH.

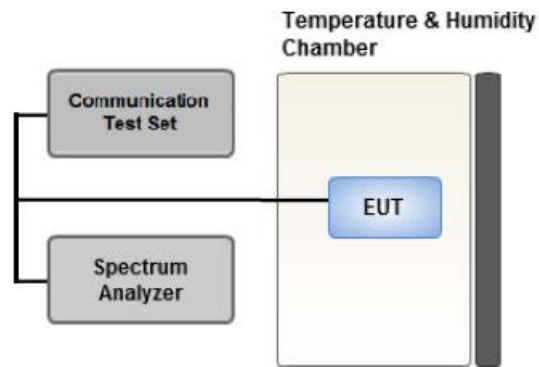

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.


The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq$ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

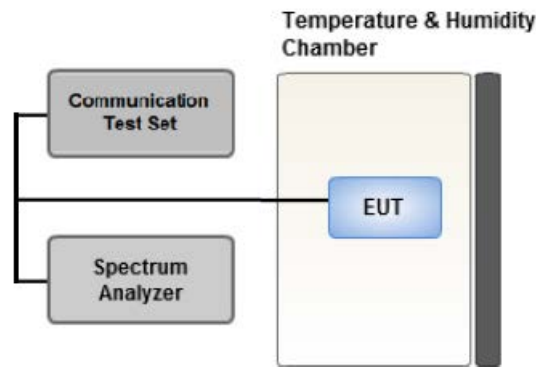

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = Peak
4. Trace Mode = Max Hold
5. Sweep time = auto
6. Number of points in sweep $\geq$ 2 x Span / RBW

3.7 CHANNEL EDGE

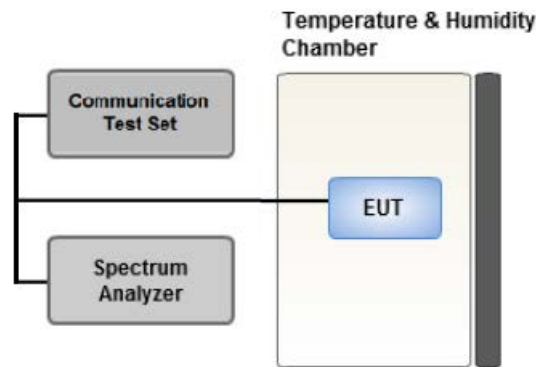

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings


1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW :
 - .
 - EA licensee's frequency block by up to and including 37.5 kHz : 300 Hz
 - .- EA licensee's frequency block greater than 37.5 kHz : 100 kHz
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

For 90.691(a), RBW=300 Hz for offset less than 37.5 kHz from channel edge and RBW=100 kHz for offsets greater than 37.5 kHz is allowed.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

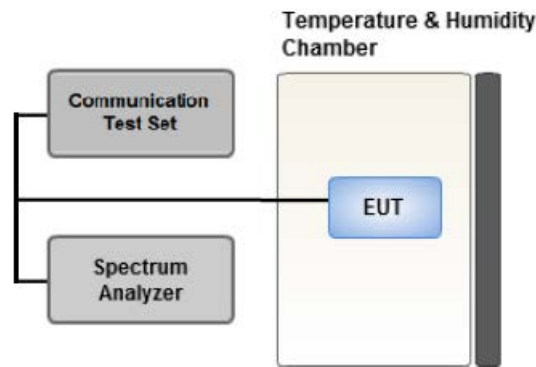

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter.
Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Stand alone, Stand alone + External accessories (Earphone, Keyboard, AC adapter, etc)
Worst case : Stand alone
- All simultaneous transmission scenarios of operation were investigated, and the test results showed no additional significant emissions relative to the least restrictive limit were observed.
Therefore, only the worst case(stand-alone) results were reported.
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 5 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- All modes of operation were tested and the worst case results are reported.
- Please refer to the table below.

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		Z
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.2		Y

3.10 WORST CASE(CONDUCTED TEST)

- Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5	High	Full RB	0
	QPSK, 16QAM, 64QAM, 256QAM	10, 15	Mid	Full RB	0
Channel Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Mid	1	0
				1	49
		15	Mid	1	0
				1	74
Band Edge (Straddle Channel)	QPSK	1.4, 3, 5	Low, High	Full RB	0
		10, 15	Mid	Full RB	0
		1.4	Mid	1	5
		3	Mid	1	14
		5	Mid	1	24
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5	Low, High	1	0
		10, 15	Mid	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	Switch box(1.2 G HPF+LNA)	HCT CO., LTD.,	F1L1	11/11/2025	Annual
RF Switching System	Switch box(3.3 G HPF+LNA)	HCT CO., LTD.,	F1L2	11/11/2025	Annual
RF Switching System	Switch box(LNA)	HCT CO., LTD.,	F1L4	11/11/2025	Annual
RF Switching System	Switch box(6 G HPF+LNA)	HCT CO., LTD.,	F1L7	11/11/2025	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/07/2025	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/26/2025	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/17/2025	Annual
DC Power Supply	E3632A	Agilent	MY40010147	08/06/2025	Annual
Dipole Antenna	UHAP	Schwarzbeck	01274	03/10/2026	Biennial
Dipole Antenna	UHAP	Schwarzbeck	01288	08/07/2026	Biennial
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/11/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/19/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/06/2025	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/28/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	08/19/2026	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	11/13/2025	Annual
Radio Communication Test Station	MT8000A	Anritsu Corp.	6272613402	08/28/2025	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/26/2025	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/17/2025	Annual
Signal & Spectrum Analyzer (2 Hz~67 GHz)	FSW67	REOHDE & SCHWARZ	101736	05/23/2025	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ kHz)
Occupied Bandwidth	95 (Confidence level about 95 %, $k=2$)
Frequency stability	28 (Confidence level about 95 %, $k=2$)

Parameter	Expanded Uncertainty ($\pm$ dB)
Block Edge	0.70 (Confidence level about 95 %, $k=2$)
Conducted Spurious Emissions	1.18 (Confidence level about 95 %, $k=2$)
Peak- to- Average Ratio	0.68 (Confidence level about 95 %, $k=2$)
Radiated Power	4.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Channel Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 90.691	< 50 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5 kHz of Block Edge	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 22.917(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046 § 90.635	< 100 Watts	PASS
Frequency stability / variation of ambient temperature	§ 2.1055, § 90.213 § 22.355	< 2.5 ppm	PASS

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§ 22.913(a)(5)	< 7 Watts max. ERP (Only 15 MHz B.W)	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 90.691 § 22.917(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 CONDUCTED OUTPUT POWER

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				814.7 MHz		823.3 MHz		
				dBm	W	dBm	W	
1.4	QPSK	1	0	24.22	0.264	24.28	0.268	100
		1	3	24.18	0.262	24.25	0.266	100
		1	5	24.26	0.267	24.30	0.269	100
		3	0	24.25	0.266	24.30	0.269	100
		3	1	24.17	0.261	24.23	0.265	100
		3	3	24.32	0.270	24.34	0.272	100
		6	0	23.43	0.220	23.53	0.226	100
	16QAM	1	0	23.54	0.226	23.62	0.230	100
		1	3	23.51	0.224	23.55	0.226	100
		1	5	23.56	0.227	23.55	0.227	100
		3	0	23.34	0.216	23.27	0.213	100
		3	1	23.35	0.216	23.44	0.221	100
		3	3	23.32	0.215	23.37	0.217	100
		6	0	22.44	0.175	22.48	0.177	100
	64QAM	1	0	22.39	0.173	22.40	0.174	100
		1	3	22.42	0.175	22.48	0.177	100
		1	5	22.39	0.173	22.40	0.174	100
		3	0	22.31	0.170	22.38	0.173	100
		3	1	22.20	0.166	22.28	0.169	100
		3	3	22.30	0.170	22.34	0.171	100
		6	0	21.36	0.137	21.39	0.138	100
	256QAM	1	0	19.38	0.087	19.43	0.088	100
		1	3	19.27	0.085	19.34	0.086	100
		1	5	19.45	0.088	19.46	0.088	100
		3	0	19.42	0.087	19.44	0.088	100
		3	1	19.33	0.086	19.36	0.086	100
		3	3	19.37	0.086	19.39	0.087	100
		6	0	19.33	0.086	19.35	0.086	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				815.5 MHz		822.5 MHz		
				dBm	W	dBm	W	
3	QPSK	1	0	24.26	0.267	24.34	0.271	100
		1	7	24.21	0.264	24.22	0.265	100
		1	14	24.37	0.274	24.36	0.273	100
		8	0	23.39	0.218	23.42	0.220	100
		8	3	23.31	0.214	23.35	0.217	100
		8	7	23.42	0.220	23.40	0.219	100
		15	0	23.65	0.232	23.66	0.232	100
	16QAM	1	0	23.57	0.228	23.65	0.232	100
		1	7	23.80	0.240	23.80	0.240	100
		1	14	23.61	0.230	23.65	0.231	100
		8	0	22.38	0.173	22.44	0.176	100
		8	3	22.43	0.175	22.44	0.176	100
		8	7	22.47	0.177	22.44	0.175	100
		15	0	22.54	0.179	22.52	0.179	100
	64QAM	1	0	22.44	0.175	22.54	0.179	100
		1	7	22.50	0.178	22.49	0.178	100
		1	14	22.54	0.179	22.52	0.178	100
		8	0	21.39	0.138	21.42	0.139	100
		8	3	21.37	0.137	21.40	0.138	100
		8	7	21.41	0.138	21.38	0.137	100
		15	0	21.48	0.141	21.51	0.141	100
	256QAM	1	0	19.48	0.089	19.54	0.090	100
		1	7	19.49	0.089	19.48	0.089	100
		1	14	19.52	0.090	19.46	0.088	100
		8	0	19.44	0.088	19.48	0.089	100
		8	3	19.38	0.087	19.39	0.087	100
		8	7	19.48	0.089	19.44	0.088	100
		15	0	19.41	0.087	19.43	0.088	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				816.5 MHz		821.5 MHz		
				dBm	W	dBm	W	
5	QPSK	1	0	24.41	0.276	24.44	0.278	100
		1	12	24.23	0.265	24.26	0.267	100
		1	24	24.44	0.278	24.38	0.274	100
		12	0	23.43	0.220	23.51	0.224	100
		12	6	23.48	0.223	23.51	0.224	100
		12	11	23.43	0.220	23.30	0.214	100
		25	0	23.51	0.224	23.51	0.224	100
	16QAM	1	0	23.59	0.229	23.73	0.236	100
		1	12	23.89	0.245	23.76	0.237	100
		1	24	23.79	0.239	23.67	0.233	100
		12	0	22.41	0.174	22.48	0.177	100
		12	6	22.44	0.175	22.44	0.175	100
		12	11	22.42	0.175	22.39	0.173	100
		25	0	22.43	0.175	22.44	0.176	100
	64QAM	1	0	22.49	0.177	22.54	0.179	100
		1	12	22.53	0.179	22.53	0.179	100
		1	24	22.62	0.183	22.49	0.177	100
		12	0	21.41	0.138	21.47	0.140	100
		12	6	21.42	0.139	21.41	0.138	100
		12	11	21.42	0.139	21.42	0.139	100
		25	0	21.45	0.140	21.43	0.139	100
	256QAM	1	0	19.42	0.087	19.52	0.089	100
		1	12	19.54	0.090	19.62	0.092	100
		1	24	19.54	0.090	19.53	0.090	100
		12	0	19.39	0.087	19.45	0.088	100
		12	6	19.45	0.088	19.45	0.088	100
		12	11	19.42	0.087	19.41	0.087	100
		25	0	19.46	0.088	19.35	0.086	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				819 MHz		
				dBm	W	
10	QPSK	1	0	24.51	0.282	100
		1	24	24.45	0.279	100
		1	49	24.34	0.272	100
		25	0	23.59	0.229	100
		25	12	23.56	0.227	100
		25	24	23.53	0.225	100
		50	0	23.57	0.228	100
	16QAM	1	0	23.71	0.235	100
		1	24	23.81	0.240	100
		1	49	23.61	0.229	100
		25	0	22.48	0.177	100
		25	12	22.51	0.178	100
		25	24	22.45	0.176	100
		50	0	22.49	0.178	100
	64QAM	1	0	22.61	0.182	100
		1	24	22.69	0.186	100
		1	49	22.52	0.179	100
		25	0	21.51	0.141	100
		25	12	21.48	0.141	100
		25	24	21.46	0.140	100
		50	0	21.52	0.142	100
	256QAM	1	0	19.69	0.093	100
		1	24	19.31	0.085	100
		1	49	19.50	0.089	100
		25	0	19.53	0.090	100
		25	12	19.54	0.090	100
		25	24	19.49	0.089	100
		50	0	19.52	0.090	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				821.5 MHz		
				dBm	W	
15	QPSK	1	0	24.57	0.286	100
		1	36	24.47	0.280	100
		1	74	24.21	0.264	100
		36	0	23.62	0.230	100
		36	18	23.52	0.225	100
		36	39	23.45	0.221	100
		75	0	23.53	0.225	100
	16QAM	1	0	23.75	0.237	100
		1	36	23.74	0.237	100
		1	74	23.51	0.224	100
		36	0	22.53	0.179	100
		36	18	22.52	0.179	100
		36	39	22.36	0.172	100
		75	0	22.46	0.176	100
	64QAM	1	0	22.67	0.185	100
		1	36	22.63	0.183	100
		1	74	22.39	0.174	100
		36	0	21.56	0.143	100
		36	18	21.50	0.141	100
		36	39	21.41	0.138	100
		75	0	21.49	0.141	100
	256QAM	1	0	19.71	0.093	100
		1	36	19.18	0.083	100
		1	74	19.36	0.086	100
		36	0	19.56	0.090	100
		36	18	19.53	0.090	100
		36	39	19.40	0.087	100
		75	0	19.49	0.089	100

8.2 EFFECTIVE RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured	Substitute	Ant.	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)	Gain (dBd)				W	W	dBm	Size
814.7	LTE B26/ 1.4 MHz	QPSK	-27.41	35.01	-10.05	1.44	V	< 100	0.225	23.52	1	0
		16QAM	-28.23	34.19	-10.05	1.44	V		0.186	22.70		
		64QAM	-29.36	33.06	-10.05	1.44	V		0.144	21.57		
		256QAM	-32.38	30.04	-10.05	1.44	V		0.072	18.55		
823.3		QPSK	-27.63	34.69	-9.95	1.44	V		0.214	23.30	1	0
		16QAM	-28.41	33.91	-9.95	1.44	V		0.179	22.52		
		64QAM	-29.52	32.80	-9.95	1.44	V		0.138	21.41		
		256QAM	-32.60	29.72	-9.95	1.44	V		0.068	18.33		

Freq (MHz)	Bandwidth	Modulation	Measured	Substitute	Ant.	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)	Gain (dBd)			W	W	dBm	Size	Offset
815.5	LTE B26/ 3 MHz	QPSK	-27.51	34.89	-10.05	1.44	V	< 100	0.219	23.40	1	0
		16QAM	-28.24	34.16	-10.05	1.44	V		0.185	22.67		
		64QAM	-29.37	33.03	-10.05	1.44	V		0.143	21.54		
		256QAM	-32.39	30.01	-10.05	1.44	V		0.071	18.52		
822.5		QPSK	-27.47	34.91	-9.95	1.44	V		0.225	23.52	1	0
		16QAM	-28.27	34.11	-9.95	1.44	V		0.187	22.72		
		64QAM	-29.39	32.99	-9.95	1.44	V		0.145	21.60		
		256QAM	-32.46	29.92	-9.95	1.44	V		0.071	18.53		

Freq (MHz)	Bandwidth	Modulation	Measured	Substitute	Ant.	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)	Gain (dBd)			W	W	dBm	Size	Offset
816.5	LTE B26/ 5 MHz	QPSK	-27.40	34.95	-10.05	1.44	V	< 100	0.222	23.46	1	0
		16QAM	-28.14	34.21	-10.05	1.44	V		0.187	22.72		
		64QAM	-29.26	33.09	-10.05	1.44	V		0.145	21.60		
		256QAM	-32.29	30.06	-10.05	1.44	V		0.072	18.57		
821.5		QPSK	-27.51	34.92	-9.95	1.44	V		0.225	23.53	1	0
		16QAM	-28.25	34.18	-9.95	1.44	V		0.190	22.79		
		64QAM	-29.37	33.06	-9.95	1.44	V		0.147	21.67		
		256QAM	-32.46	29.97	-9.95	1.44	V		0.072	18.58		

Freq (MHz)	Bandwidth	Modulation	Measured	Substitute	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
819.0	LTE B26/ 10 MHz	QPSK	-27.78	34.64	-10.05	1.44	V	< 100	0.207	23.15	1	0
		16QAM	-28.62	33.80	-10.05	1.44	V		0.170	22.31		
		64QAM	-29.71	32.71	-10.05	1.44	V		0.132	21.22		
		256QAM	-32.65	29.77	-10.05	1.44	V		0.067	18.28		

Freq (MHz)	Bandwidth	Modulation	Measured	Substitute	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
821.5	LTE B26/ 15 MHz	QPSK	-27.52	34.91	-9.95	1.44	V	< 7.00	0.225	23.52	1	0
		16QAM	-28.24	34.19	-9.95	1.44	V		0.191	22.80		
		64QAM	-29.37	33.06	-9.95	1.44	V		0.147	21.67		
		256QAM	-32.36	30.07	-9.95	1.44	V		0.074	18.68		

Note

1. Limit: None (for reporting purposes only)

8.3 RADIATED SPURIOUS EMISSIONS

- MODE: LTE B26
 ■ MODULATION SIGNAL: 5 MHz QPSK
 ■ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit	Size	
									Size	Offset
26715 (816.5)	1 633.00	-42.71	9.52	-67.25	1.98	V	-59.71	-13.00	1	0
	2 449.50	-42.88	10.09	-63.63	2.53	V	-56.07	-13.00		
	3 266.00	-43.96	11.86	-63.38	2.95	V	-54.47	-13.00		
26765 (821.5)	1 643.00	-43.55	9.56	-68.19	2.00	V	-60.63	-13.00	1	0
	2 464.50	-43.35	10.21	-64.11	2.59	V	-56.49	-13.00		
	3 286.00	-42.92	12.05	-62.34	2.95	V	-53.24	-13.00		

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Band 26	1.4 MHz	823.3	QPSK	6	0	1.0977
			16QAM			1.0931
			64QAM			1.0945
			256QAM			1.0914
	3 MHz	822.5	QPSK	15		2.7159
			16QAM			2.7055
			64QAM			2.7054
			256QAM			2.7098
	5 MHz	821.5	QPSK	25		4.5290
			16QAM			4.5091
			64QAM			4.5237
			256QAM			4.5487
	10 MHz	819.0	QPSK	50		9.0040
			16QAM			9.0123
			64QAM			8.9872
			256QAM			9.0267
	15 MHz	821.5	QPSK	75		13.474
			16QAM			13.468
			64QAM			13.485
			256QAM			13.476

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 47 ~ 66.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	814.7	8.0459	28.591	-57.284	-28.693	-13.00
		823.3	5.2144	28.591	-57.575	-28.984	
	3	815.5	9.7607	28.591	-58.002	-29.411	
		822.5	3.7887	27.976	-56.804	-28.828	
	5	816.5	6.2812	28.591	-56.474	-27.883	
		821.5	9.9701	28.591	-58.226	-29.635	
	10	819.0	8.9033	28.591	-57.336	-28.745	
	15	821.5	3.7887	27.976	-57.803	-29.827	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 87 ~ 94.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Ext. Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.6 CHANNEL EDGE

- Plots of the EUT's Band Edge are shown Page 67 ~ 86.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


MODE:	<u>LTE 26</u>
OPERATING FREQUENCY:	<u>814,700,000 Hz</u>
CHANNEL:	<u>26697(1.4 MHz)</u>
REFERENCE VOLTAGE:	<u>3.860 VDC</u>
DEVIATION LIMIT:	<u>± 0.000 25 % or 2.5 ppm</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	814 700 003	0.0	0.000 000	0.000
100 %		-30	814 700 001	-2.1	0.000 000	-0.003
100 %		-20	814 700 006	3.4	0.000 000	0.004
100 %		-10	814 700 000	-2.2	0.000 000	-0.003
100 %		0	814 700 004	1.4	0.000 000	0.002
100 %		+10	814 700 007	4.8	0.000 001	0.006
100 %		+30	814 700 000	-2.2	0.000 000	-0.003
100 %		+40	814 700 000	-3.0	0.000 000	-0.004
100 %		+50	814 700 004	1.8	0.000 000	0.002
Batt. Endpoint	3.400	+20	814 700 000	-2.2	0.000 000	-0.003

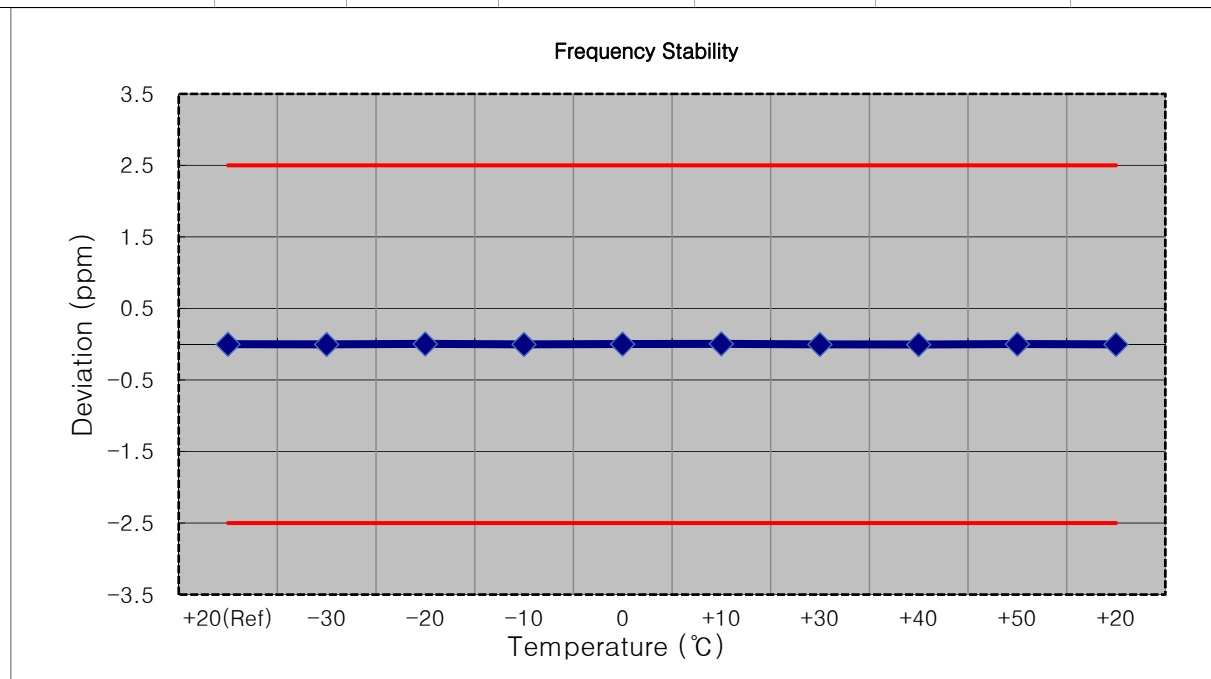


MODE:	<u>LTE 26</u>
OPERATING FREQUENCY:	<u>815,500,000 Hz</u>
CHANNEL:	<u>26705(3 MHz)</u>
REFERENCE VOLTAGE:	<u>3.860 VDC</u>
DEVIATION LIMIT:	<u>± 0.000 25 % or 2.5 ppm</u>

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	815 499 995	0.0	0.000 000	0.000
100 %		-30	815 499 992	-3.7	0.000 000	-0.005
100 %		-20	815 500 004	8.4	0.000 001	0.010
100 %		-10	815 500 005	9.7	0.000 001	0.012
100 %		0	815 500 003	7.6	0.000 001	0.009
100 %		+10	815 499 999	4.0	0.000 000	0.005
100 %		+30	815 500 004	8.6	0.000 001	0.011
100 %		+40	815 499 999	3.7	0.000 000	0.005
100 %		+50	815 500 003	7.8	0.000 001	0.010
Batt. Endpoint	3.400	+20	815 500 003	7.6	0.000 001	0.009

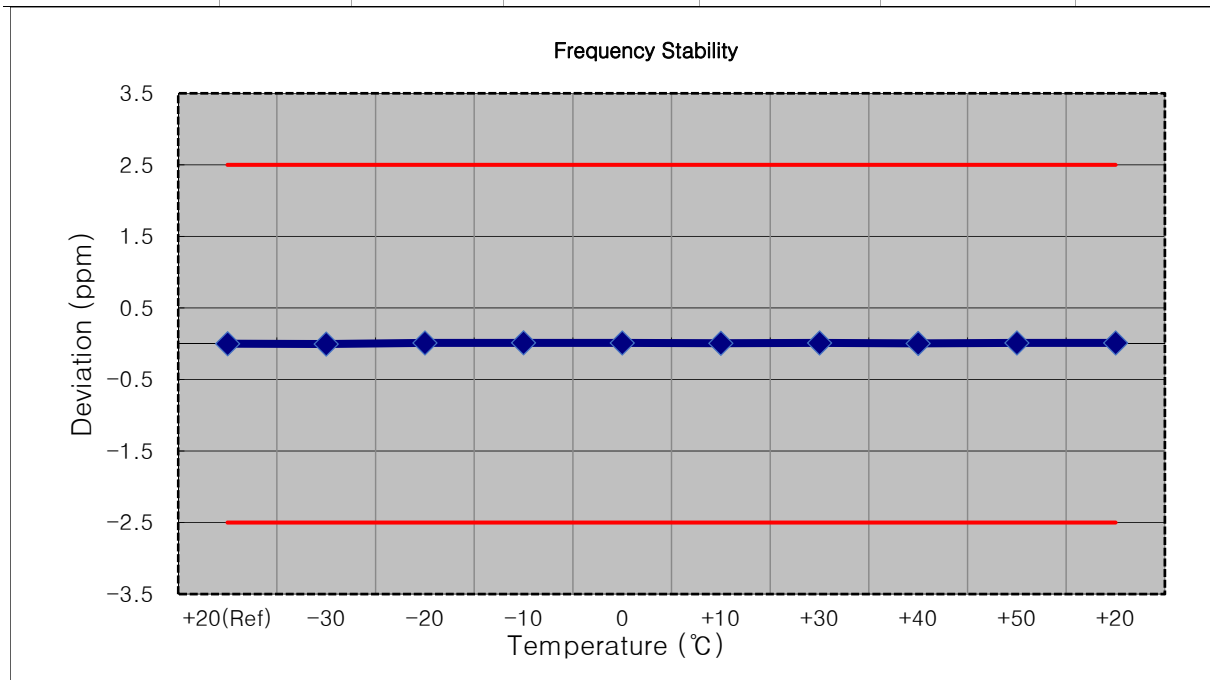


MODE:	<u>LTE 26</u>
OPERATING FREQUENCY:	<u>816,500,000 Hz</u>
CHANNEL:	<u>26715(5 MHz)</u>
REFERENCE VOLTAGE:	<u>3.860 VDC</u>
DEVIATION LIMIT:	<u>± 0.000 25 % or 2.5 ppm</u>

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	816 500 001	0.0	0.000 000	0.000
100 %		-30	816 500 003	2.0	0.000 000	0.002
100 %		-20	816 500 000	-1.9	0.000 000	-0.002
100 %		-10	816 500 000	-1.8	0.000 000	-0.002
100 %		0	816 500 000	-1.9	0.000 000	-0.002
100 %		+10	816 500 005	3.2	0.000 000	0.004
100 %		+30	816 500 004	2.4	0.000 000	0.003
100 %		+40	816 499 999	-2.6	0.000 000	-0.003
100 %		+50	816 500 003	1.9	0.000 000	0.002
Batt. Endpoint	3.400	+20	816 500 003	2.0	0.000 000	0.002

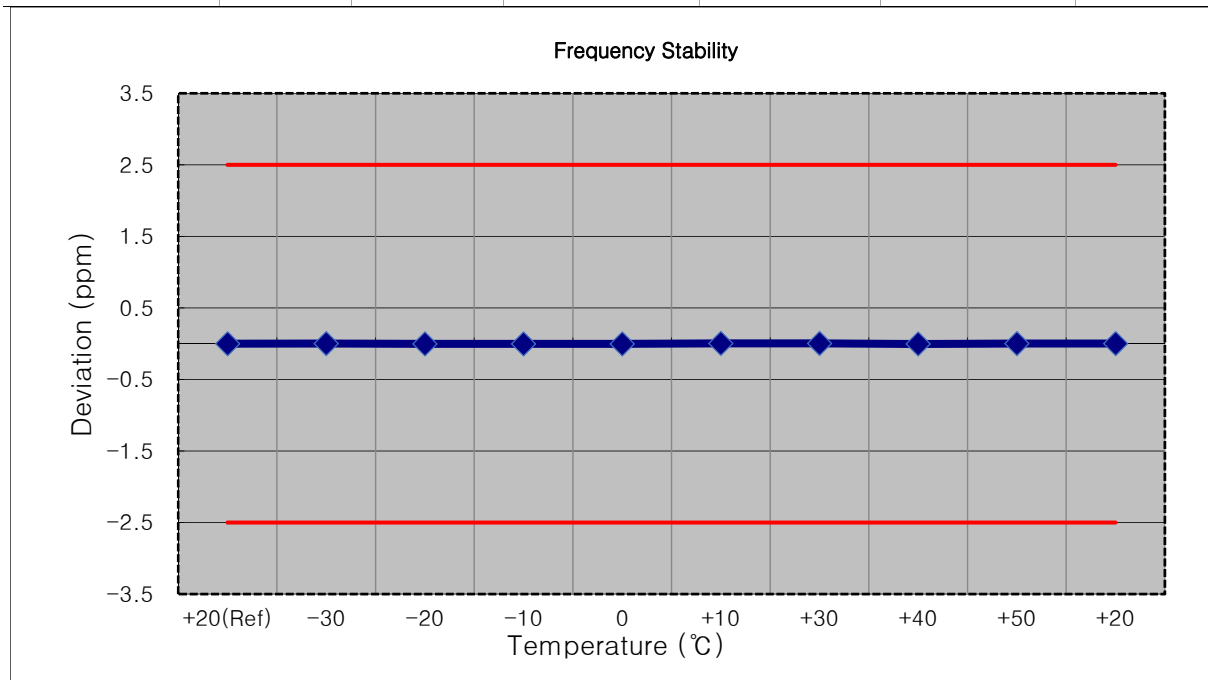


MODE:	<u>LTE 26</u>
OPERATING FREQUENCY:	<u>819,000,000 Hz</u>
CHANNEL:	<u>26740(10 MHz)</u>
REFERENCE VOLTAGE:	<u>3.860 VDC</u>
DEVIATION LIMIT:	<u>± 0.000 25 % or 2.5 ppm</u>

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	818 999 998	0.0	0.000 000	0.000
100 %		-30	819 000 000	2.1	0.000 000	0.003
100 %		-20	818 999 996	-1.8	0.000 000	-0.002
100 %		-10	819 000 001	2.6	0.000 000	0.003
100 %		0	819 000 001	3.2	0.000 000	0.004
100 %		+10	818 999 995	-2.8	0.000 000	-0.003
100 %		+30	819 000 000	2.1	0.000 000	0.003
100 %		+40	818 999 996	-2.6	0.000 000	-0.003
100 %		+50	818 999 999	1.3	0.000 000	0.002
Batt. Endpoint	3.400	+20	818 999 997	-1.1	0.000 000	-0.001

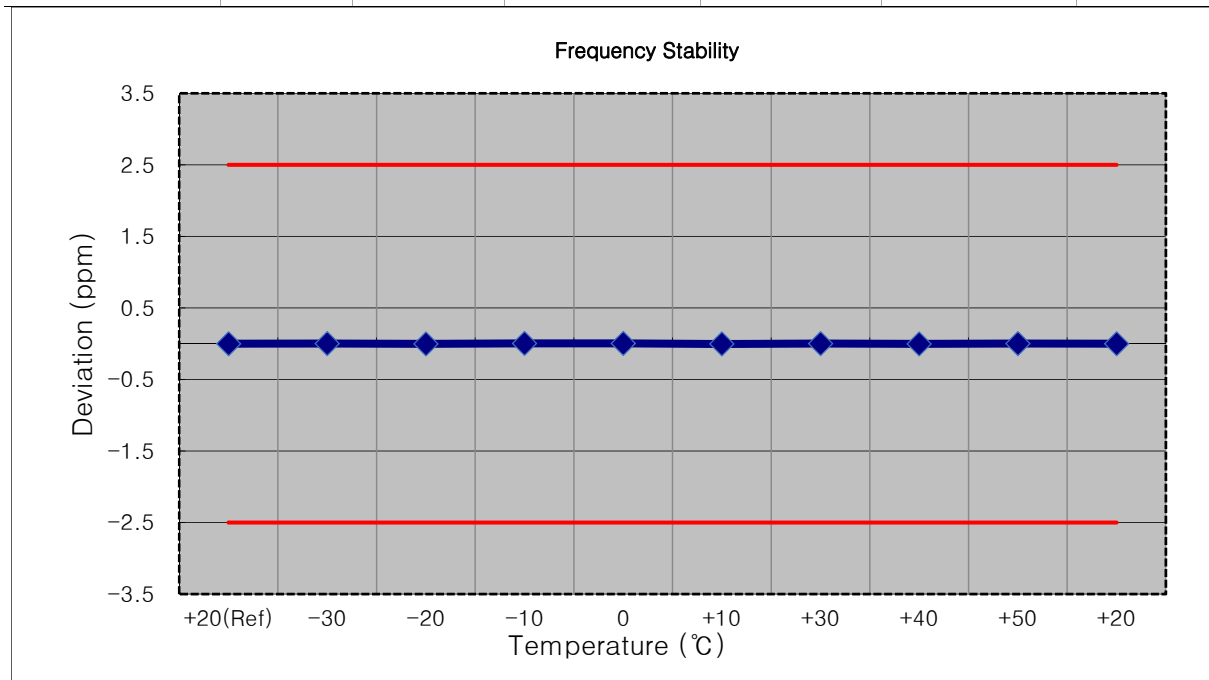

- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 821,500,000 Hz
- ▣ CHANNEL: 26765(15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	821 500 002	0.0	0.000 000	0.000
100 %		-30	821 500 005	3.0	0.000 000	0.004
100 %		-20	821 500 005	3.1	0.000 000	0.004
100 %		-10	821 500 005	2.6	0.000 000	0.003
100 %		0	821 500 004	2.3	0.000 000	0.003
100 %		+10	821 499 999	-3.5	0.000 000	-0.004
100 %		+30	821 499 999	-2.9	0.000 000	-0.004
100 %		+40	821 500 005	2.5	0.000 000	0.003
100 %		+50	821 500 000	-2.1	0.000 000	-0.003
Batt. Endpoint	3.400	+20	821 499 999	-3.3	0.000 000	-0.004

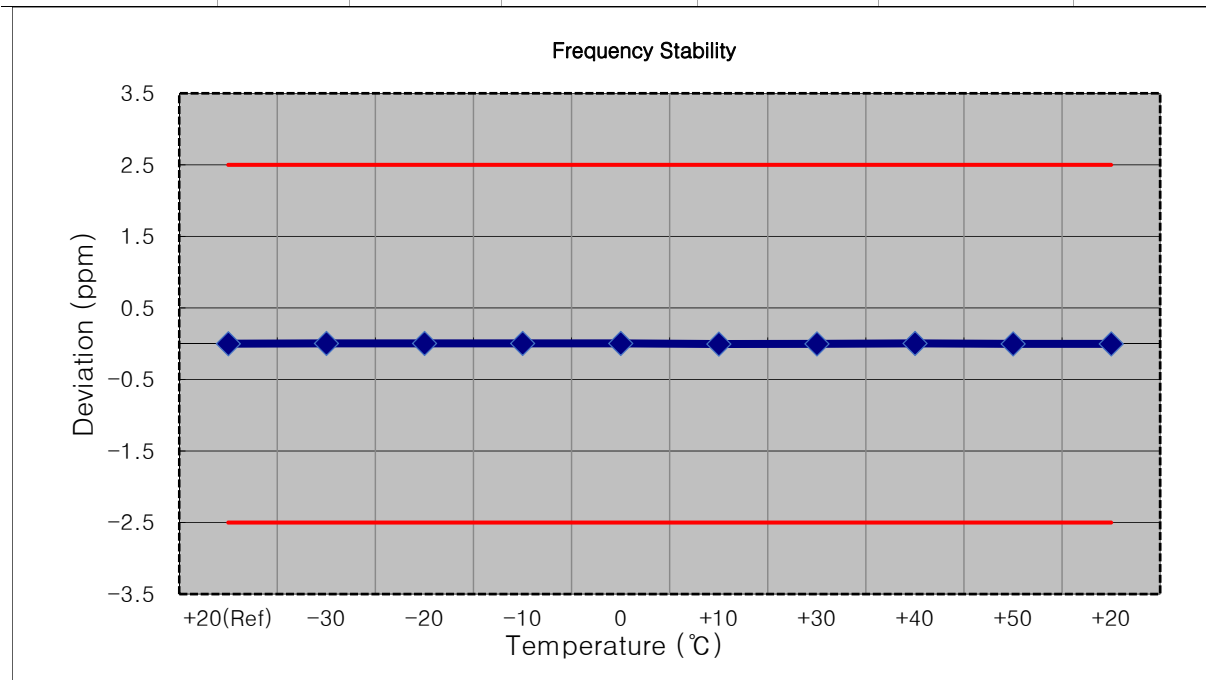

8.8 STRADDLE CHANNEL

8.8.1 CONDUCTED OUTPUT POWER

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
1.4	QPSK	1	0	24.16	0.261	100
		1	3	24.07	0.255	100
		1	5	24.14	0.259	100
		3	0	24.14	0.259	100
		3	1	24.07	0.255	100
		3	3	24.18	0.262	100
		6	0	23.30	0.214	100
	16QAM	1	0	23.45	0.221	100
		1	3	23.41	0.219	100
		1	5	23.41	0.219	100
		3	0	23.14	0.206	100
		3	1	23.28	0.213	100
		3	3	23.22	0.210	100
		6	0	22.27	0.169	100
	64QAM	1	0	22.30	0.170	100
		1	3	22.28	0.169	100
		1	5	22.25	0.168	100
		3	0	22.22	0.167	100
		3	1	22.12	0.163	100
		3	3	22.19	0.166	100
		6	0	21.21	0.132	100
	256QAM	1	0	19.27	0.085	100
		1	3	19.18	0.083	100
		1	5	19.28	0.085	100
		3	0	19.28	0.085	100
		3	1	19.23	0.084	100
		3	3	19.23	0.084	100
		6	0	19.20	0.083	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
3	QPSK	1	0	24.22	0.264	100
		1	7	24.05	0.254	100
		1	14	24.18	0.262	100
		8	0	23.26	0.212	100
		8	3	23.19	0.208	100
		8	7	23.23	0.211	100
		15	0	23.47	0.222	100
	16QAM	1	0	23.53	0.226	100
		1	7	23.63	0.230	100
		1	14	23.51	0.224	100
		8	0	22.28	0.169	100
		8	3	22.28	0.169	100
		8	7	22.29	0.169	100
		15	0	22.36	0.172	100
	64QAM	1	0	22.39	0.174	100
		1	7	22.35	0.172	100
		1	14	22.36	0.172	100
		8	0	21.27	0.134	100
		8	3	21.25	0.133	100
		8	7	21.23	0.133	100
		15	0	21.33	0.136	100
	256QAM	1	0	19.39	0.087	100
		1	7	19.31	0.085	100
		1	14	19.31	0.085	100
		8	0	19.45	0.088	100
		8	3	19.22	0.084	100
		8	7	19.27	0.084	100
		15	0	19.25	0.084	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
5	QPSK	1	0	24.27	0.267	100
		1	12	24.09	0.256	100
		1	24	24.20	0.263	100
		12	0	23.35	0.216	100
		12	6	23.34	0.216	100
		12	11	23.20	0.209	100
		25	0	23.35	0.216	100
	16QAM	1	0	23.55	0.226	100
		1	12	23.61	0.230	100
		1	24	23.45	0.221	100
		12	0	22.33	0.171	100
		12	6	22.27	0.169	100
		12	11	22.25	0.168	100
		25	0	22.28	0.169	100
	64QAM	1	0	22.37	0.172	100
		1	12	22.38	0.173	100
		1	24	22.32	0.170	100
		12	0	21.31	0.135	100
		12	6	21.25	0.133	100
		12	11	21.26	0.134	100
		25	0	21.27	0.134	100
	256QAM	1	0	19.38	0.087	100
		1	12	19.41	0.087	100
		1	24	19.35	0.086	100
		12	0	19.29	0.085	100
		12	6	19.26	0.084	100
		12	11	19.23	0.084	100
		25	0	19.20	0.083	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
10	QPSK	1	0	24.38	0.274	100
		1	24	24.33	0.271	100
		1	49	24.19	0.263	100
		25	0	23.42	0.220	100
		25	12	23.39	0.218	100
		25	24	23.35	0.216	100
		50	0	23.40	0.219	100
	16QAM	1	0	23.59	0.229	100
		1	24	23.61	0.230	100
		1	49	23.46	0.222	100
		25	0	22.35	0.172	100
		25	12	22.34	0.171	100
		25	24	22.28	0.169	100
		50	0	22.34	0.171	100
	64QAM	1	0	22.50	0.178	100
		1	24	22.53	0.179	100
		1	49	22.34	0.172	100
		25	0	21.36	0.137	100
		25	12	21.33	0.136	100
		25	24	21.28	0.134	100
		50	0	21.35	0.136	100
	256QAM	1	0	19.54	0.090	100
		1	24	19.15	0.082	100
		1	49	19.35	0.086	100
		25	0	19.38	0.087	100
		25	12	19.36	0.086	100
		25	24	19.31	0.085	100
		50	0	19.35	0.086	100

8.8.2 EFFECTIVE RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
824.0	LTE B26/ 1.4 MHz	QPSK	-27.71	34.59	-9.95	1.44	V	< 7.00	0.209	23.20	1	0
		16QAM	-28.48	33.82	-9.95	1.44	V		0.175	22.43		
		64QAM	-29.59	32.71	-9.95	1.44	V		0.136	21.32		
		256QAM	-32.66	29.64	-9.95	1.44	V		0.067	18.25		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
824.0	LTE B26/ 3 MHz	QPSK	-27.72	34.58	-9.95	1.44	V	< 7.00	0.208	23.19	1	0
		16QAM	-28.39	33.91	-9.95	1.44	V		0.179	22.52		
		64QAM	-29.49	32.81	-9.95	1.44	V		0.139	21.42		
		256QAM	-32.55	29.75	-9.95	1.44	V		0.069	18.36		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
824.0	LTE B26/ 5 MHz	QPSK	-27.65	34.65	-9.95	1.44	V	< 7.00	0.212	23.26	1	0
		16QAM	-28.23	34.07	-9.95	1.44	V		0.185	22.68		
		64QAM	-29.35	32.95	-9.95	1.44	V		0.143	21.56		
		256QAM	-32.44	29.86	-9.95	1.44	V		0.070	18.47		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
824.0	LTE B26/ 10 MHz	QPSK	-27.88	34.42	-9.95	1.44	V	< 7.00	0.201	23.03	1	0
		16QAM	-28.71	33.59	-9.95	1.44	V		0.166	22.20		
		64QAM	-29.78	32.52	-9.95	1.44	V		0.130	21.13		
		256QAM	-32.75	29.55	-9.95	1.44	V		0.065	18.16		

8.8.3 RADIATED SPURIOUS EMISSIONS

- ▣ MODE: LTE B26(Straddle)
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit	RB	
									Size	Offset
26790 (824.0)	1 648.00	-43.79	9.58	-68.47	2.02	V	-60.91	-13.00	1	0
	2 472.00	-44.15	10.26	-64.94	2.59	V	-57.27	-13.00		
	3 296.00	-44.44	12.13	-63.97	2.95	V	-54.79	-13.00		

8.8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	824.0	8.8734	28.591	-56.968	-28.377	-13.00
	3		3.9382	27.976	-58.031	-30.055	
	5		9.1426	28.591	-57.487	-28.896	
	10		3.7488	27.976	-56.911	-28.935	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 96 ~ 99.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131

8.8.5 CHANNEL EDGE(Part90)


- Test Channel : 26790(824.0MHz)
- Plots of the EUT's Band Edge are shown Page 100 ~ 111.

8.8.6 BAND EDGE(Part22)


- Test Channel : 26790(824.0 MHz)
- Plots of the EUT's Band Edge are shown Page 112 ~ 119.

9. TEST PLOTS


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 QPSK RB 6_0)

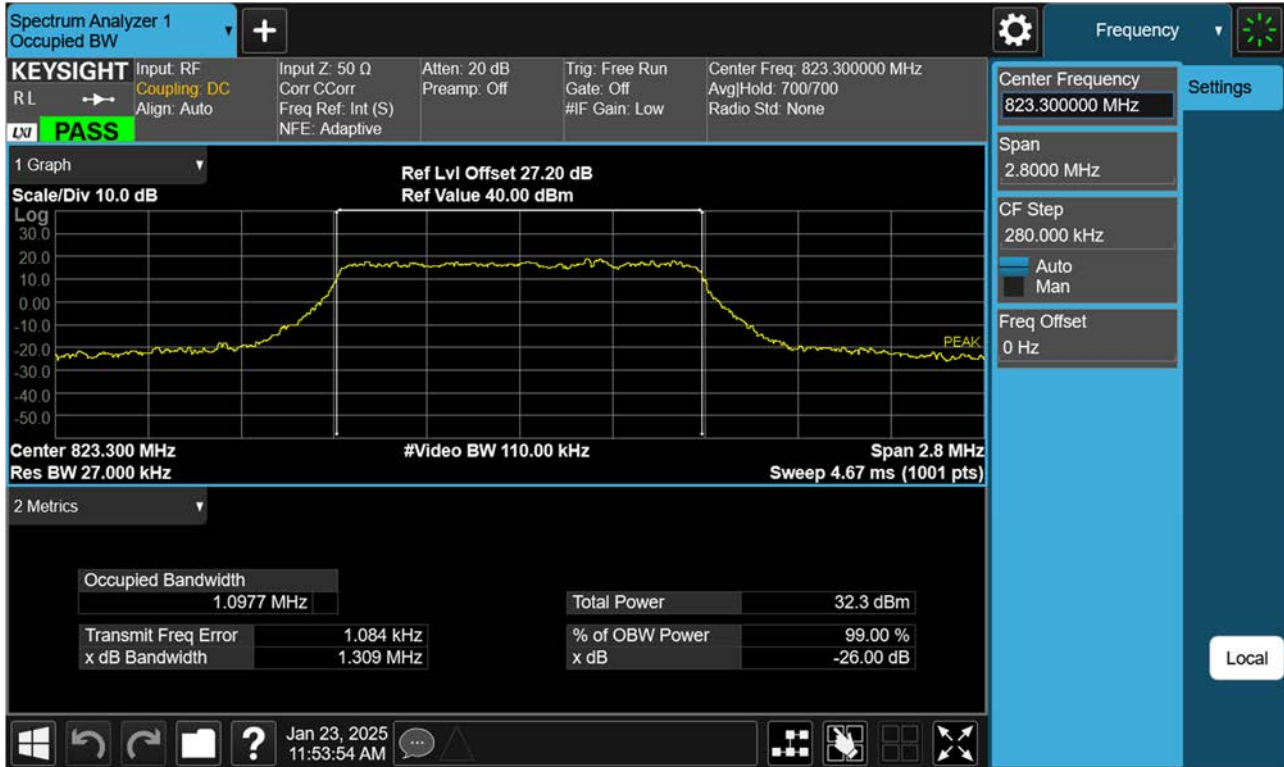


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 16QAM RB 6_0)

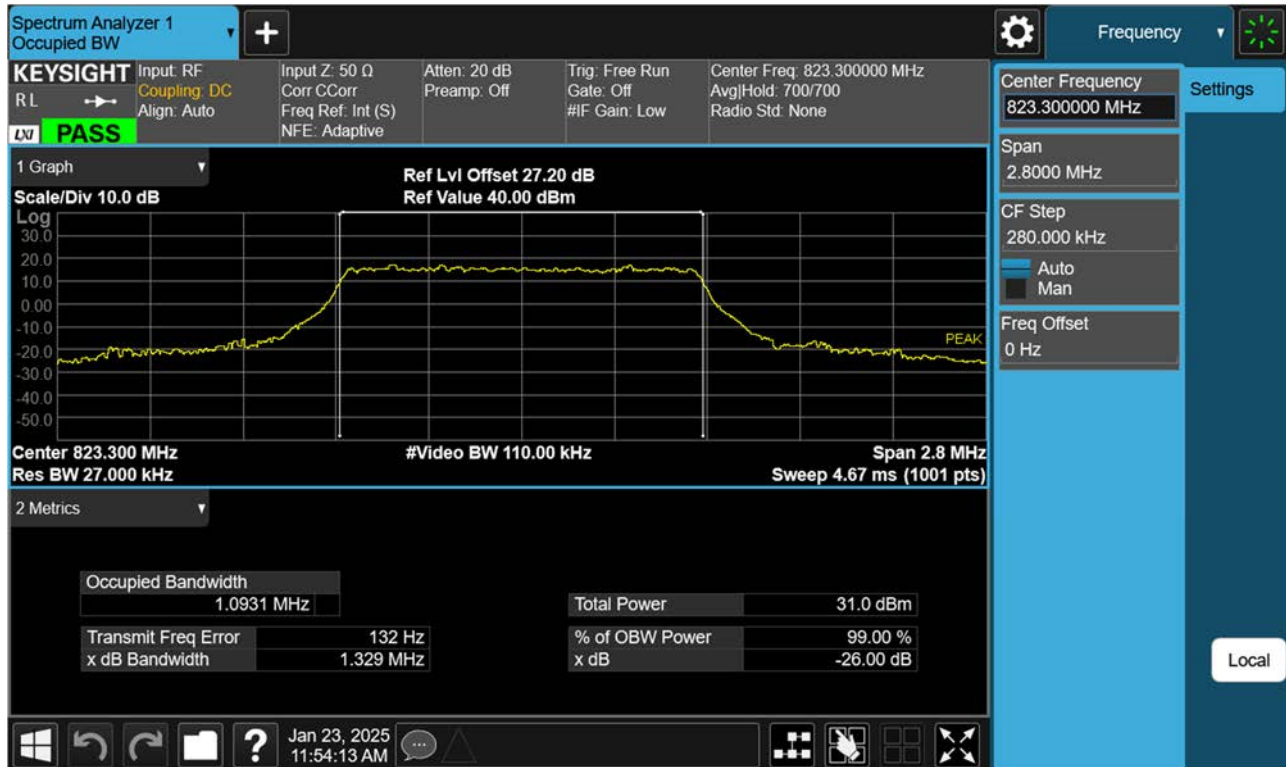

BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 64QAM RB 6_0)

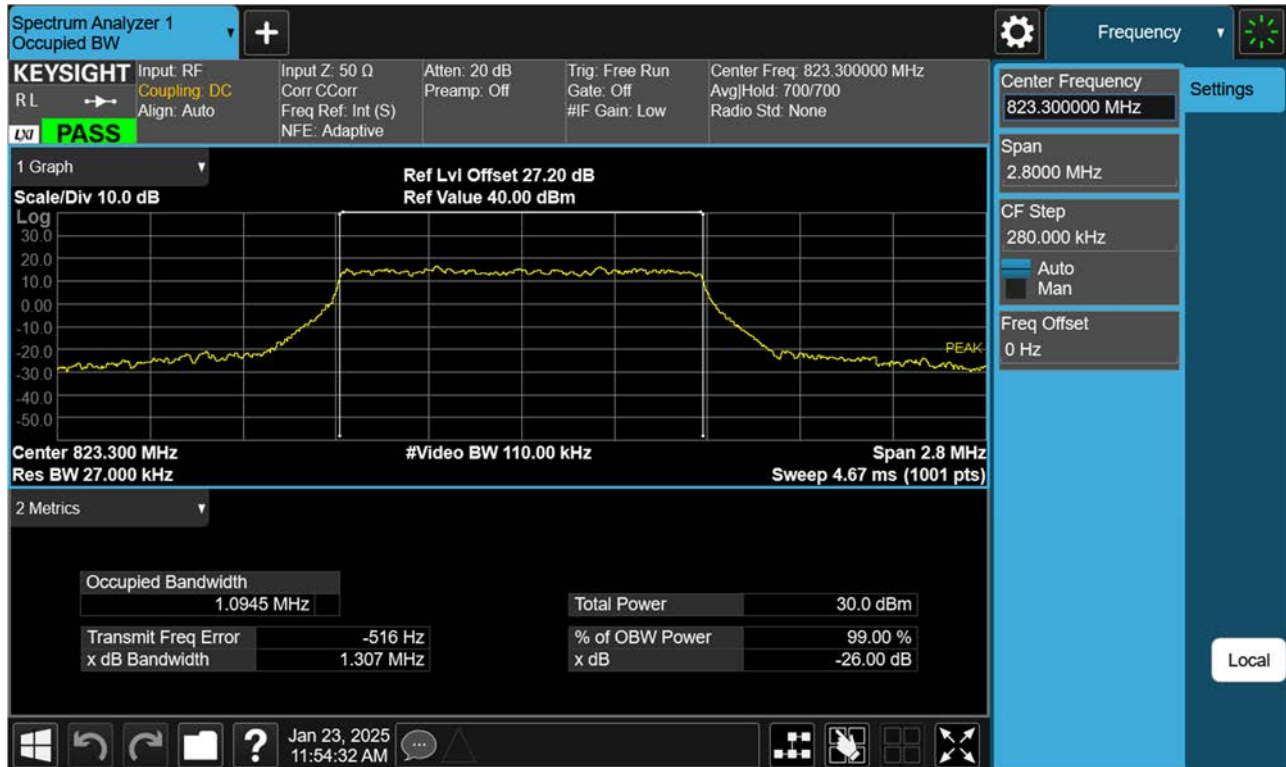


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 256QAM RB 6_0)

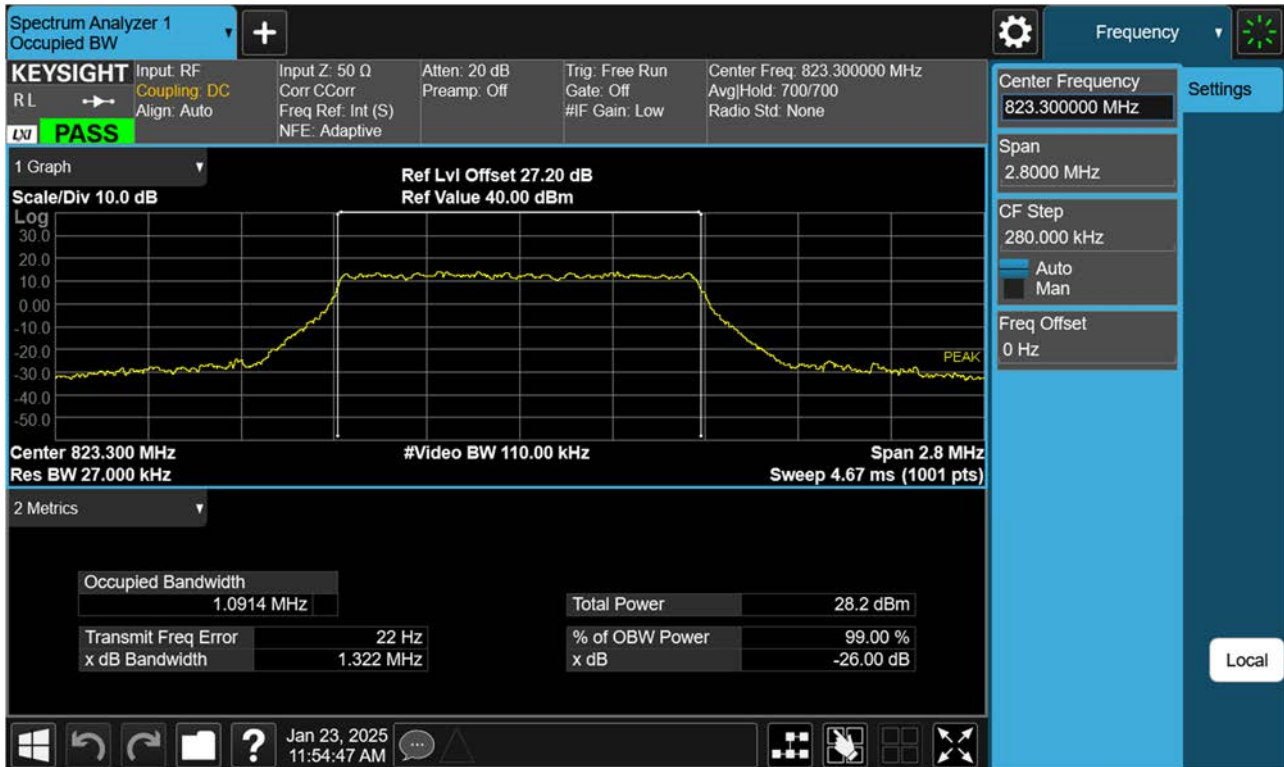


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 QPSK RB 15_0)




BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 16QAM RB 15_0)

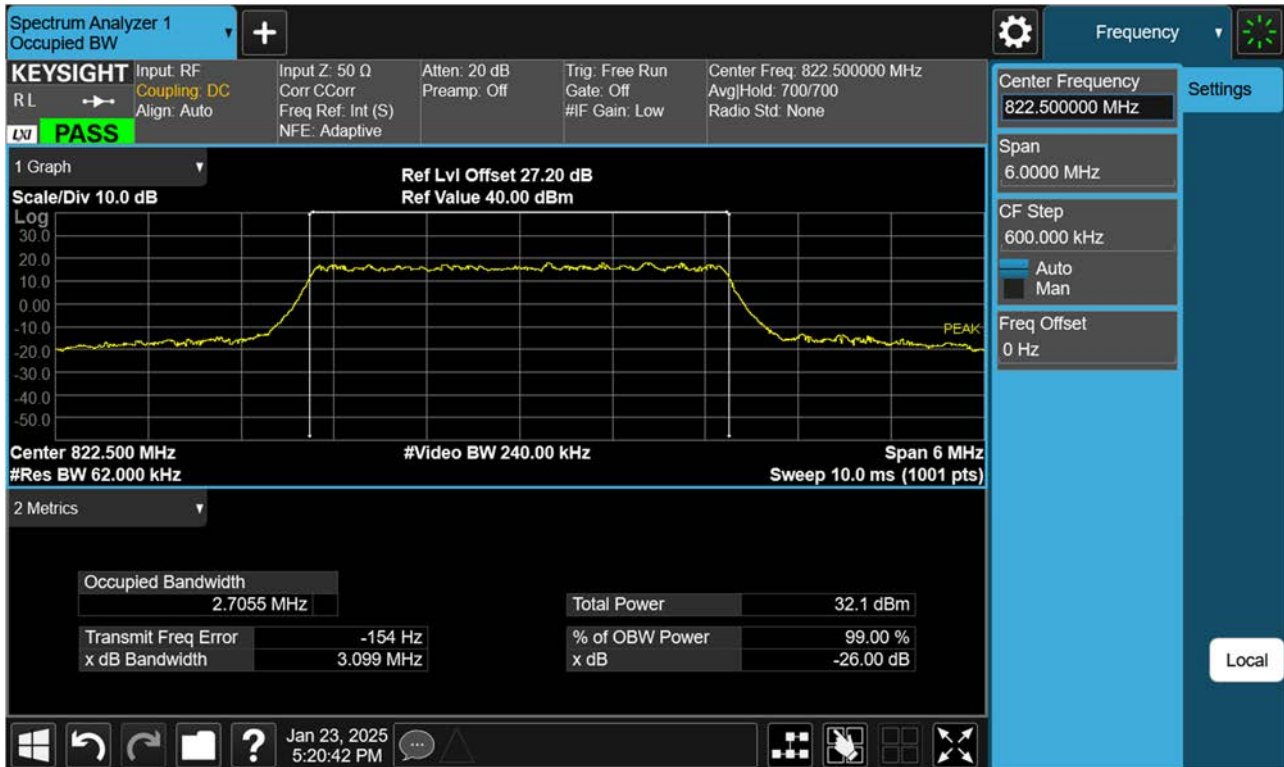


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 64QAM RB 15_0)

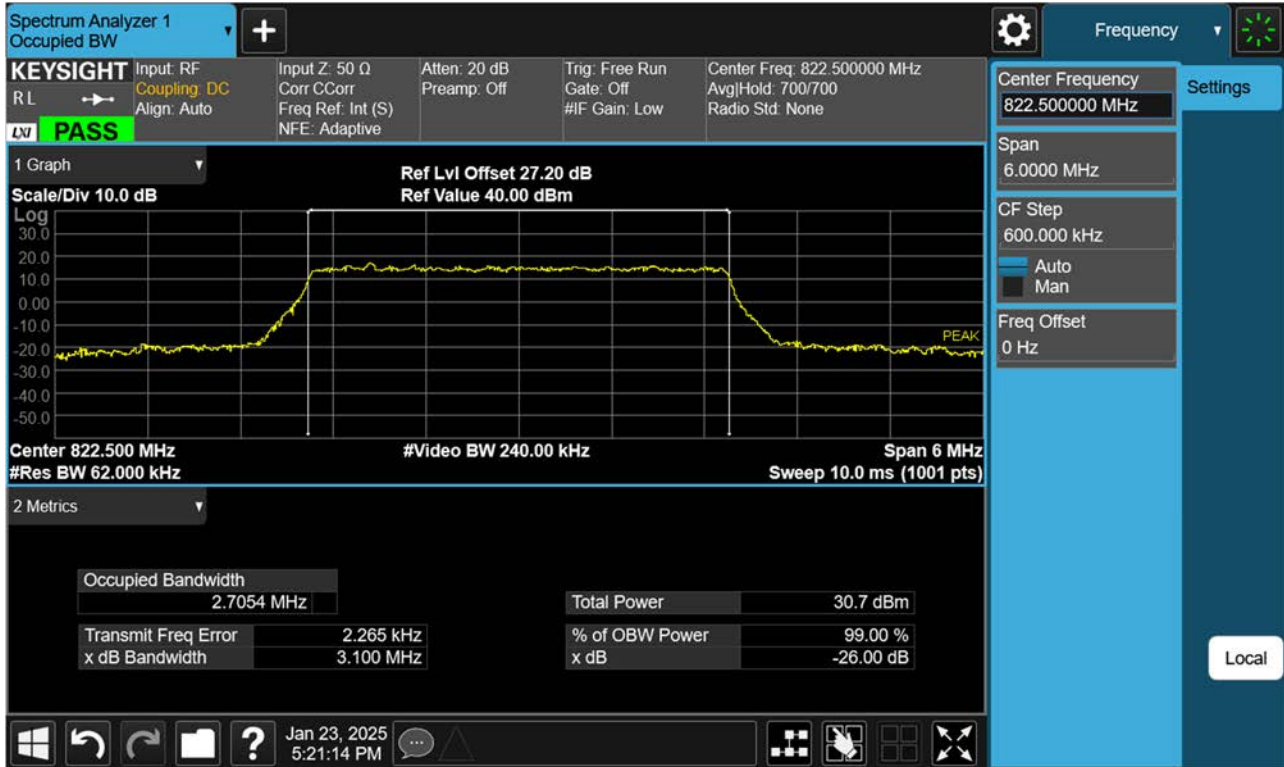


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 256QAM RB 15_0)

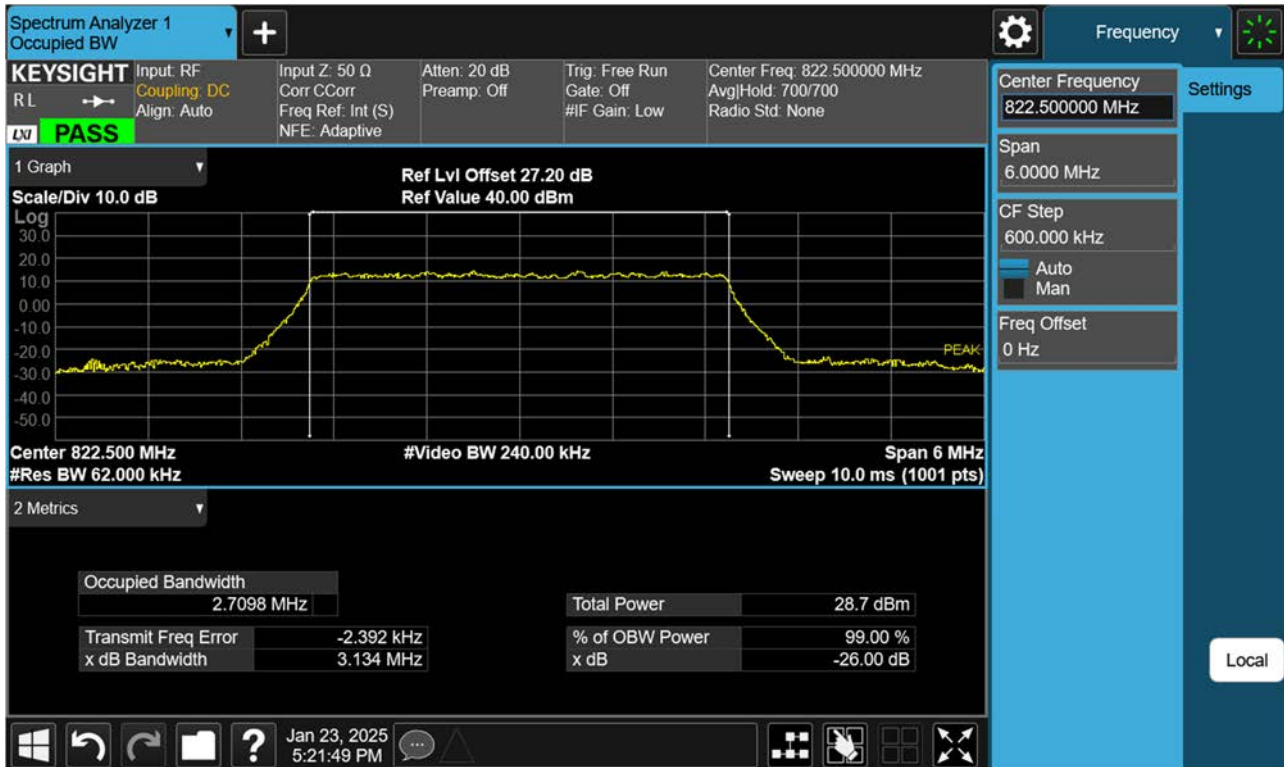


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 QPSK RB 25_0)

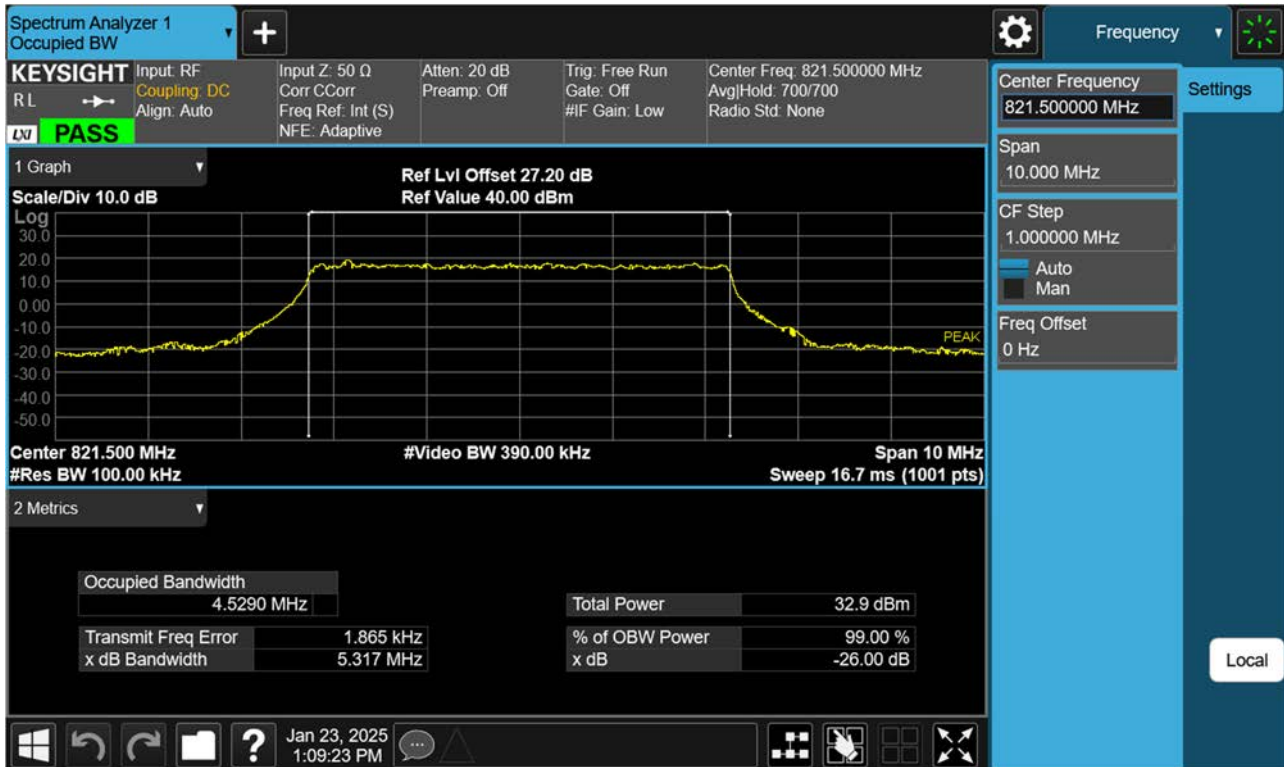


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 16QAM RB 25_0)

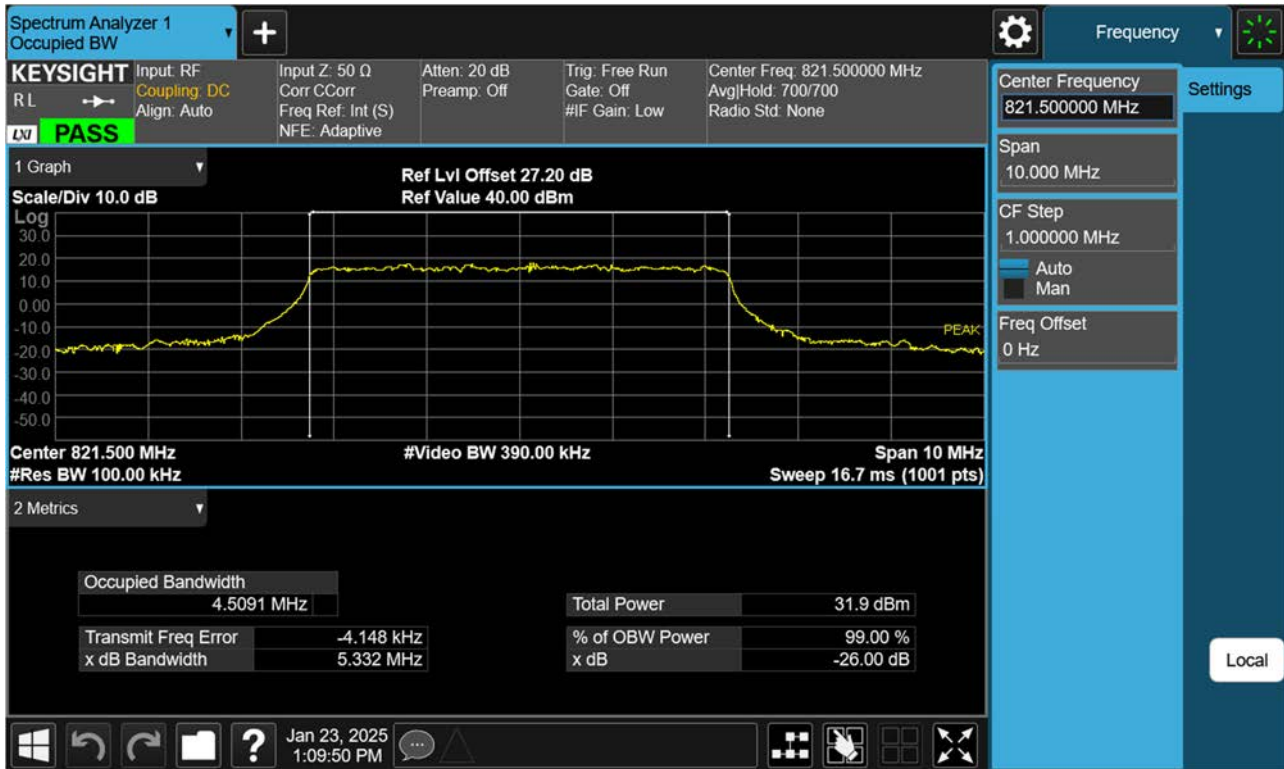


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 64QAM RB 25_0)

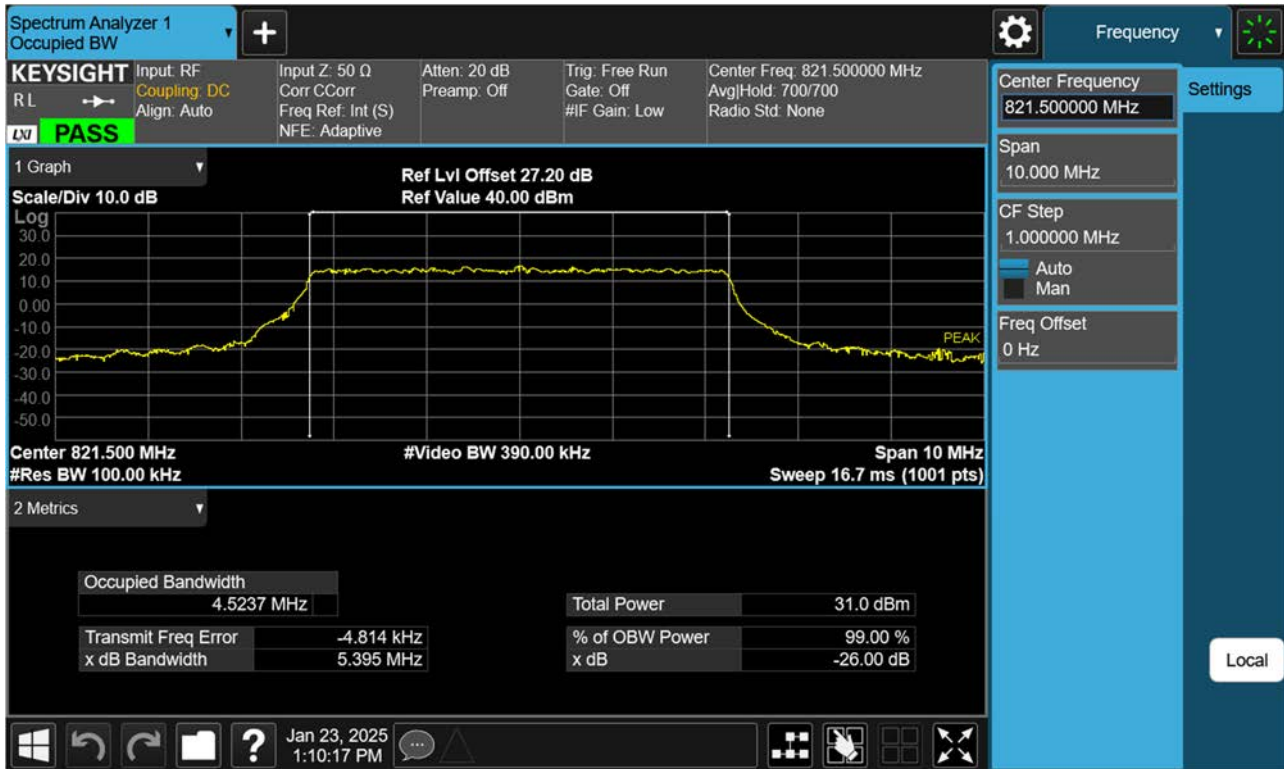


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 256QAM RB 25_0)

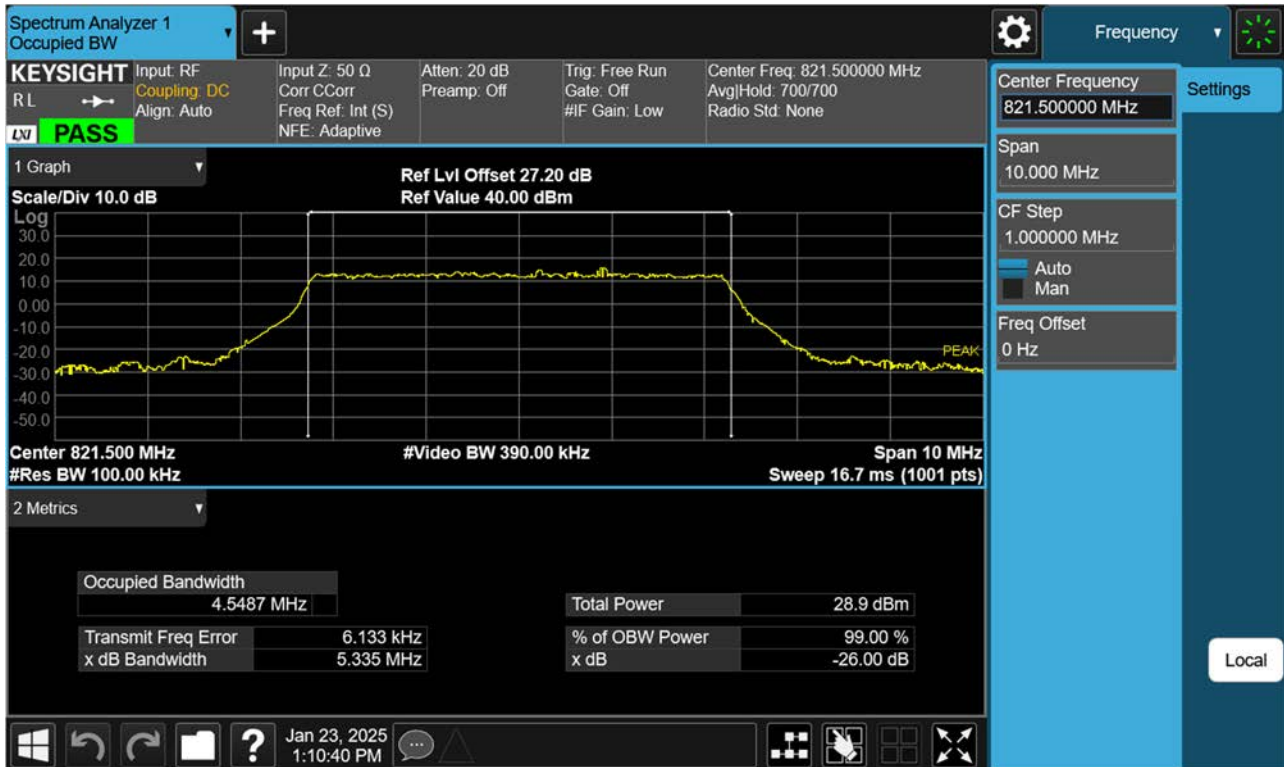


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 QPSK RB 50_0)

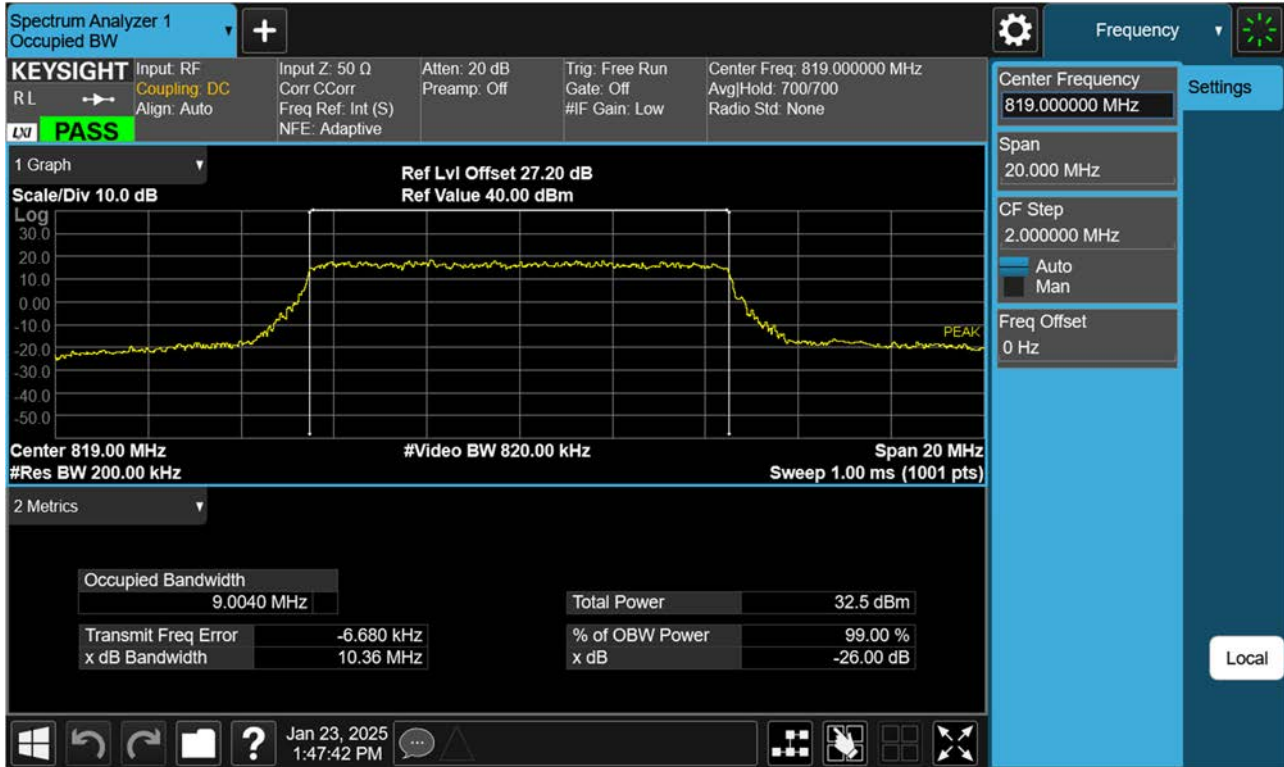


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 16QAM RB 50_0)

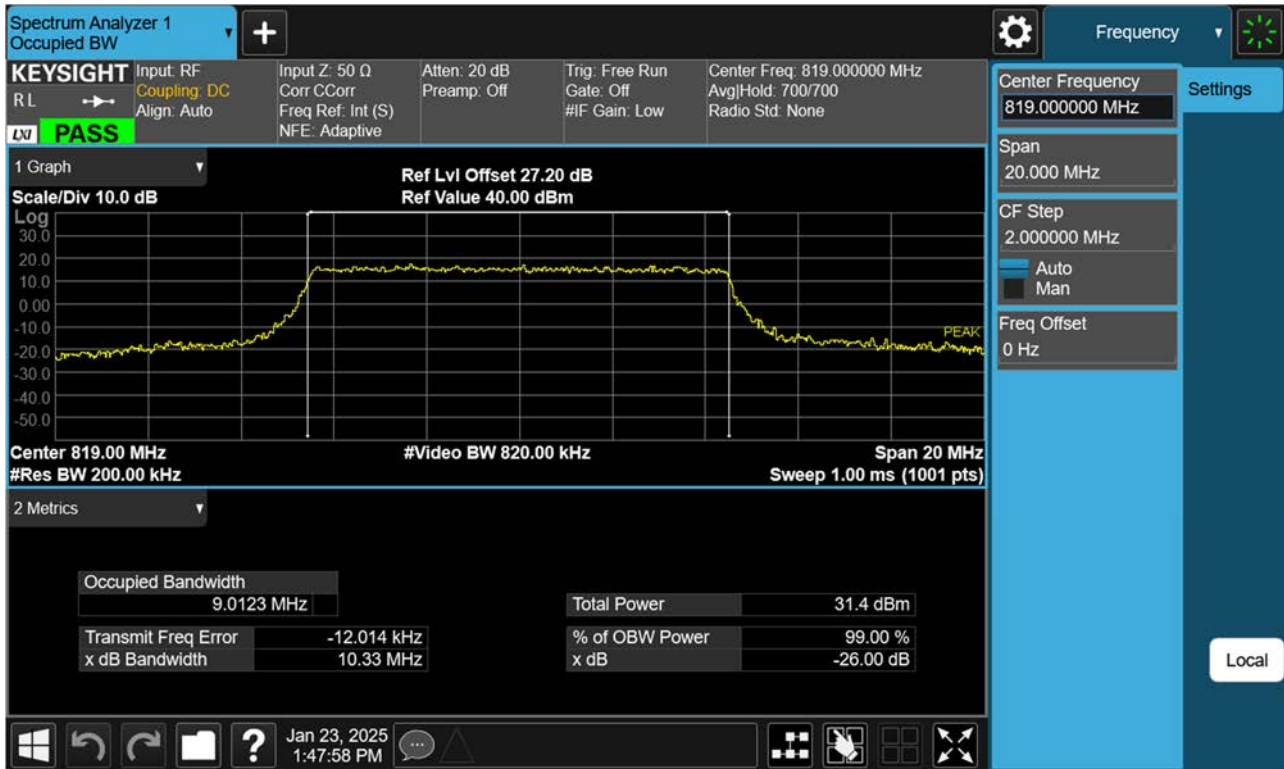

BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 64QAM RB 50_0)

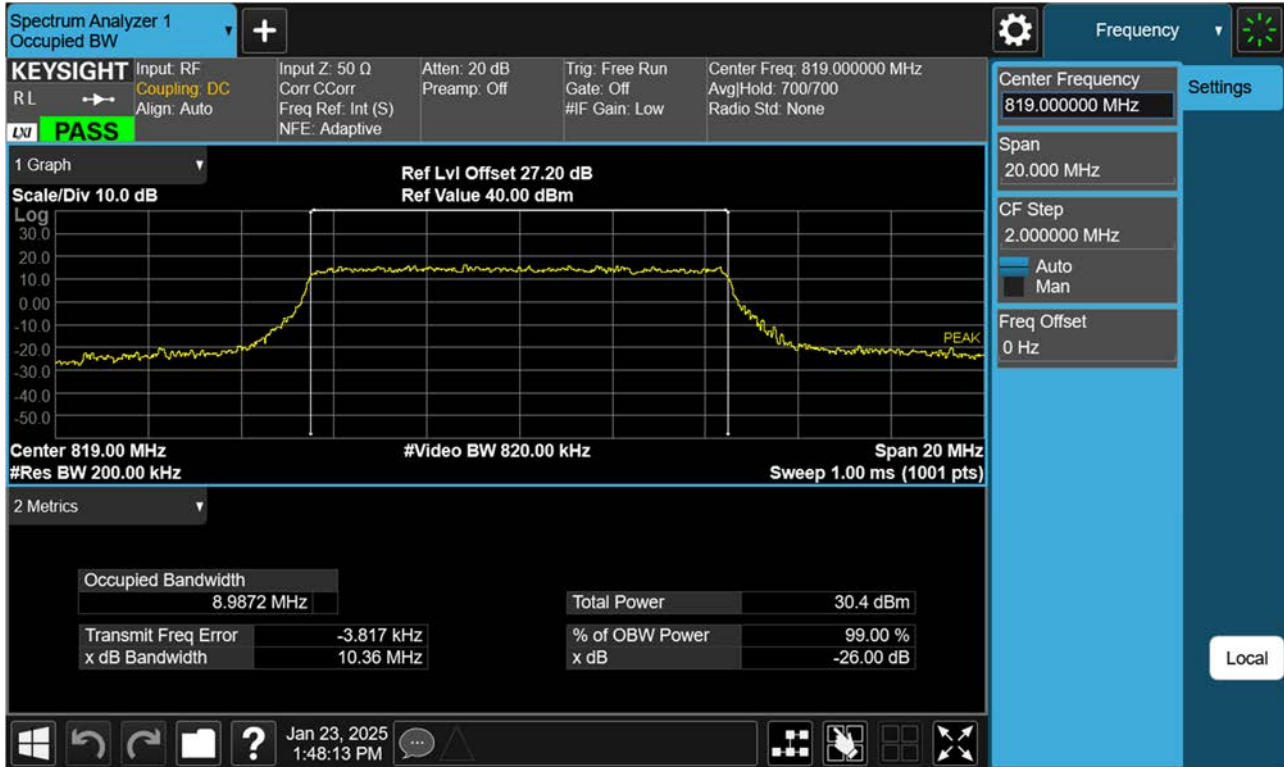


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 256QAM RB 50_0)

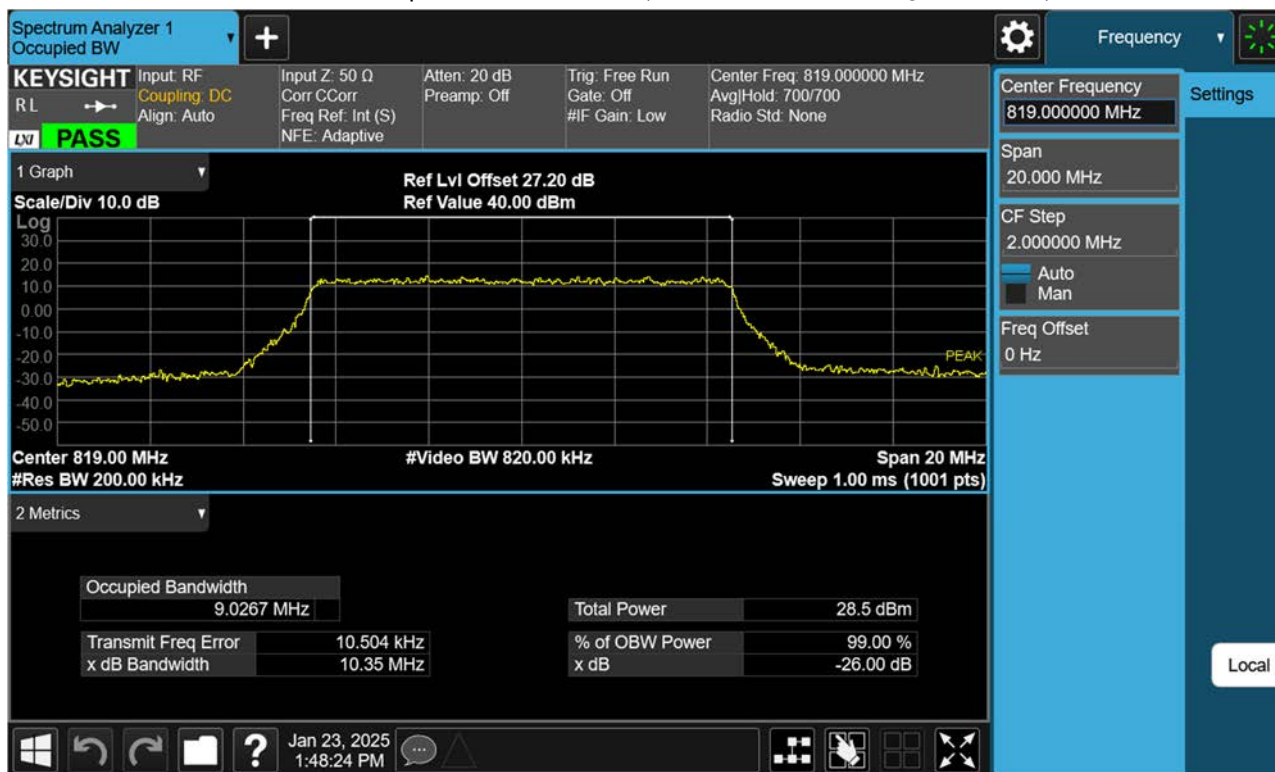


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 QPSK RB 75_0)




BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 16QAM RB 75_0)

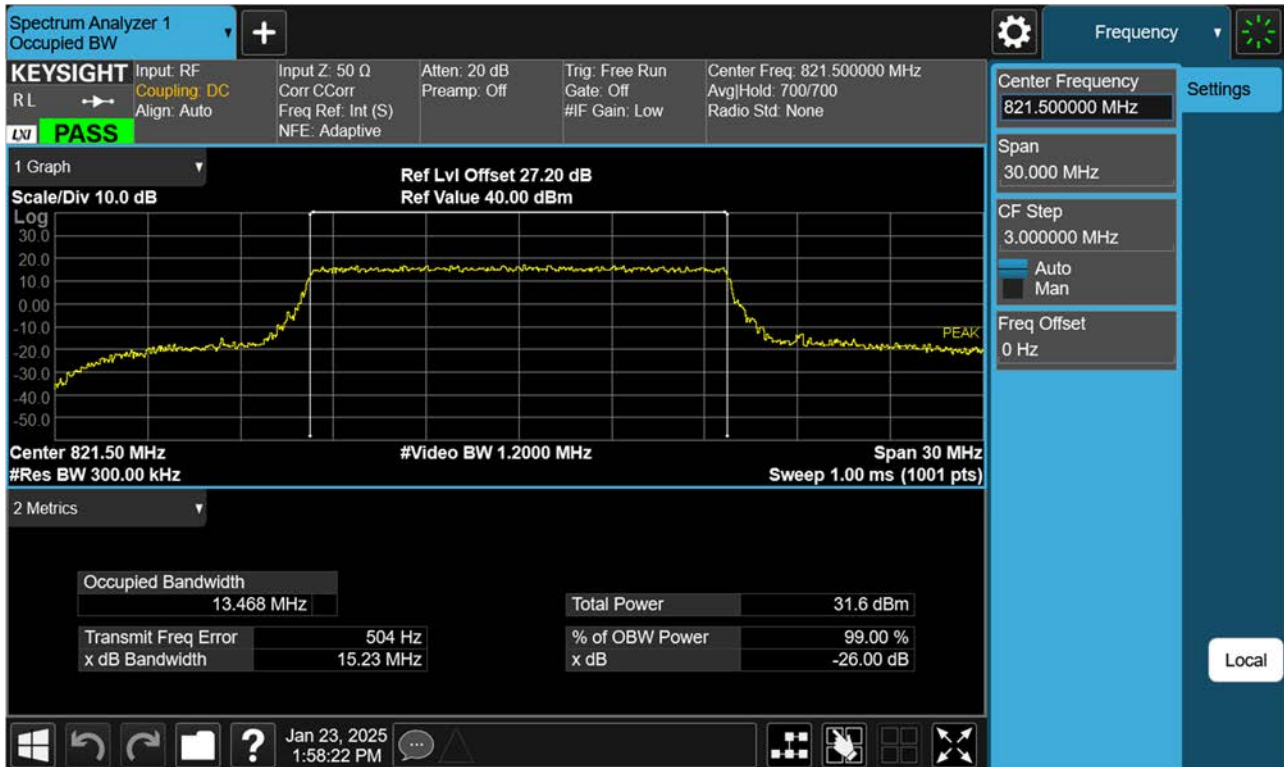


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 64QAM RB 75_0)

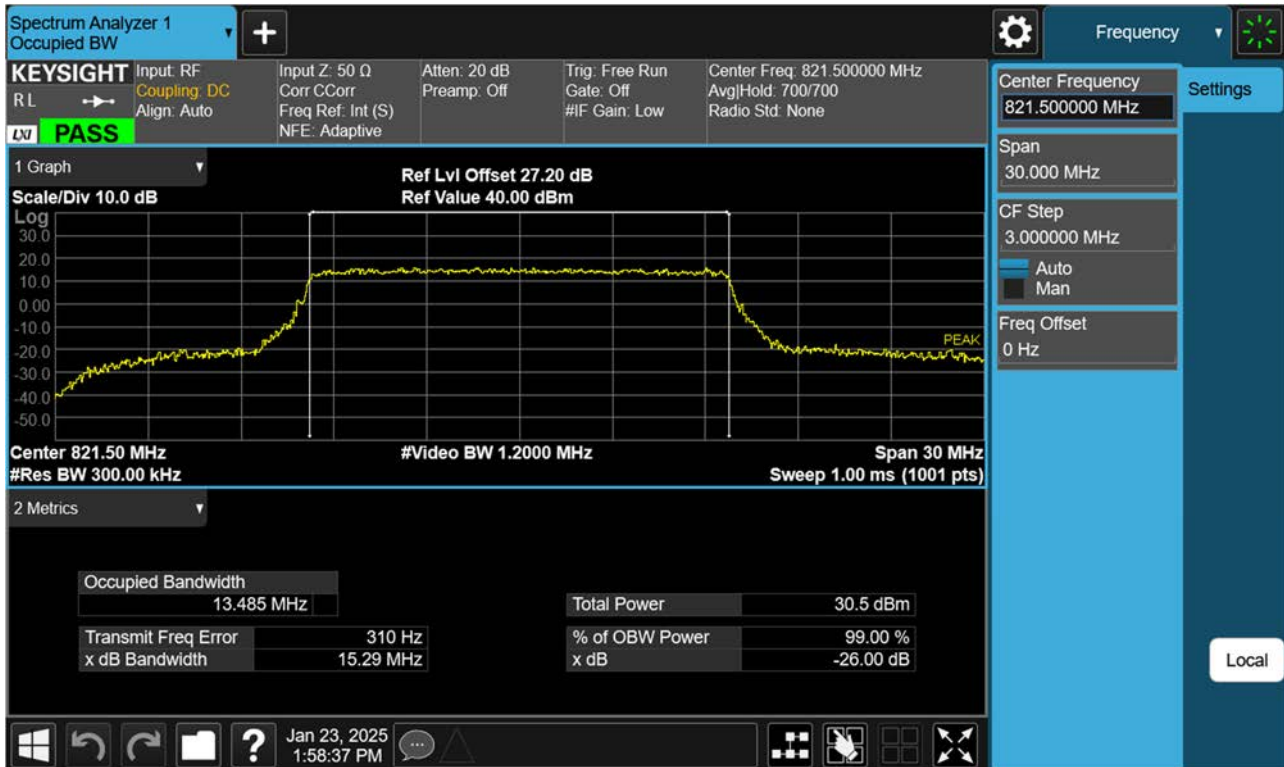


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 256QAM RB 75_0)

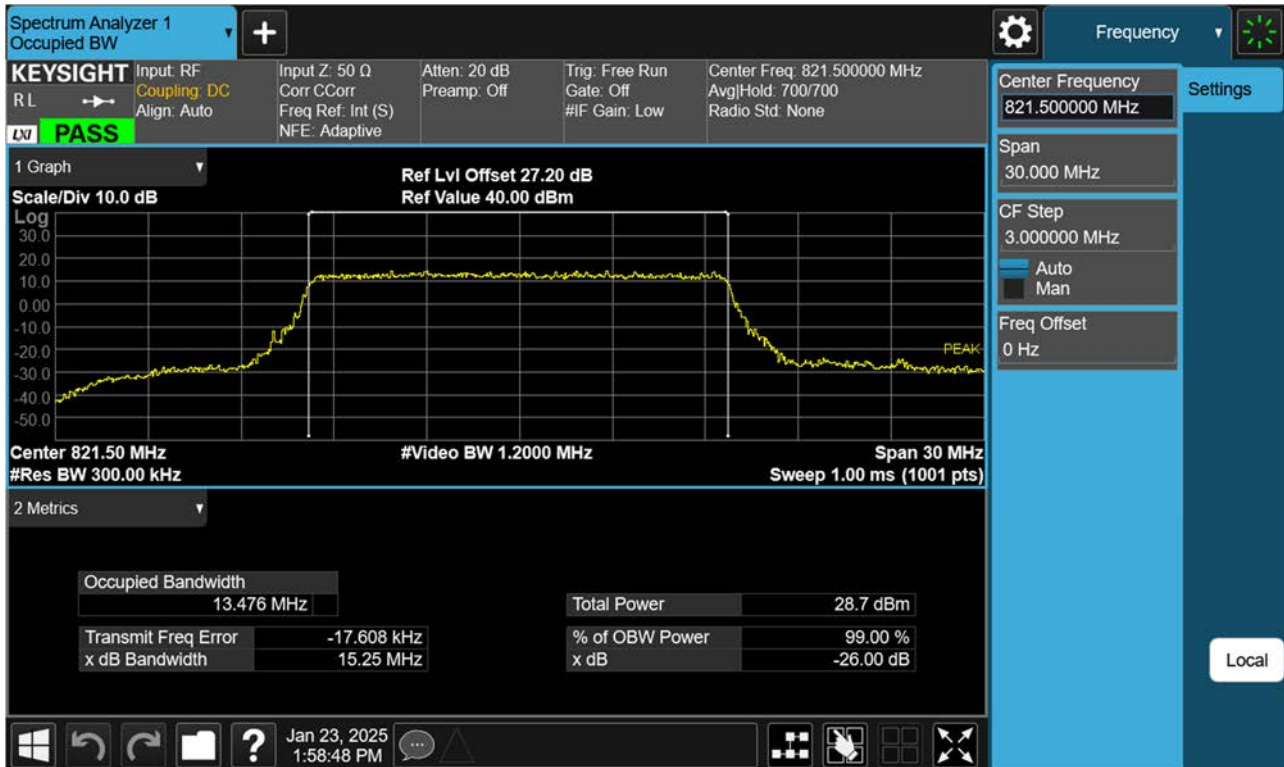


BAND 26. Lower Channel Edge Plot (1.4 M BW Ch.26697 QPSK RB 1, Offset 0)

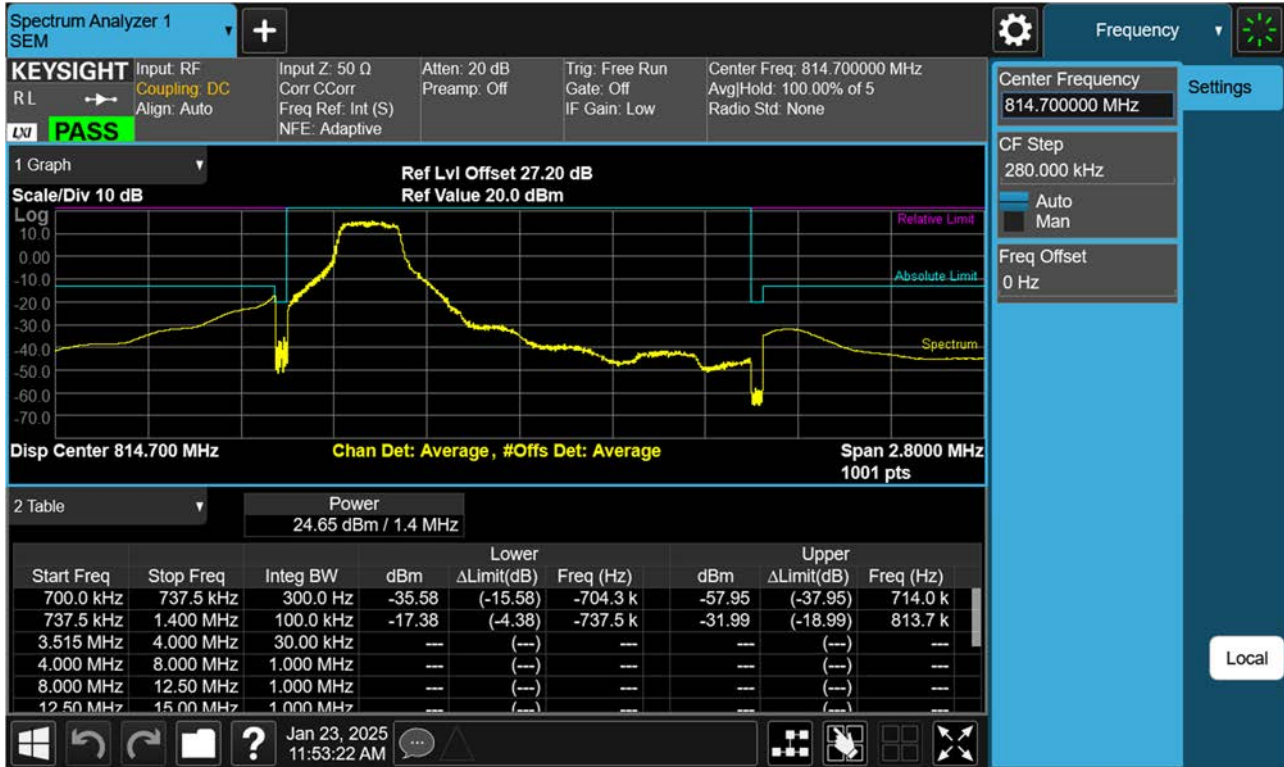


BAND 26. Lower Channel Edge Plot (1.4 M BW Ch.26697 QPSK_RB6_Offset 0)

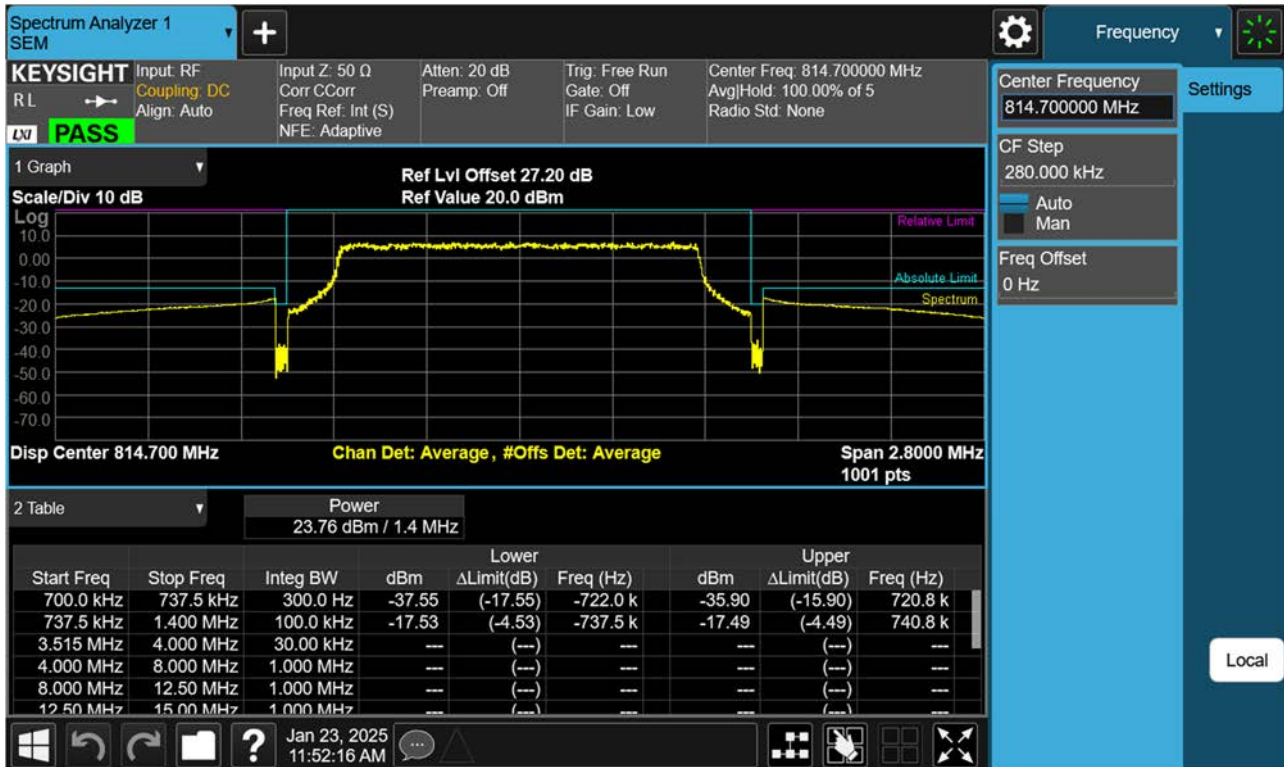


BAND 26. Lower Channel Edge Plot (3 M BW Ch.26705 QPSK RB 1, Offset 0)

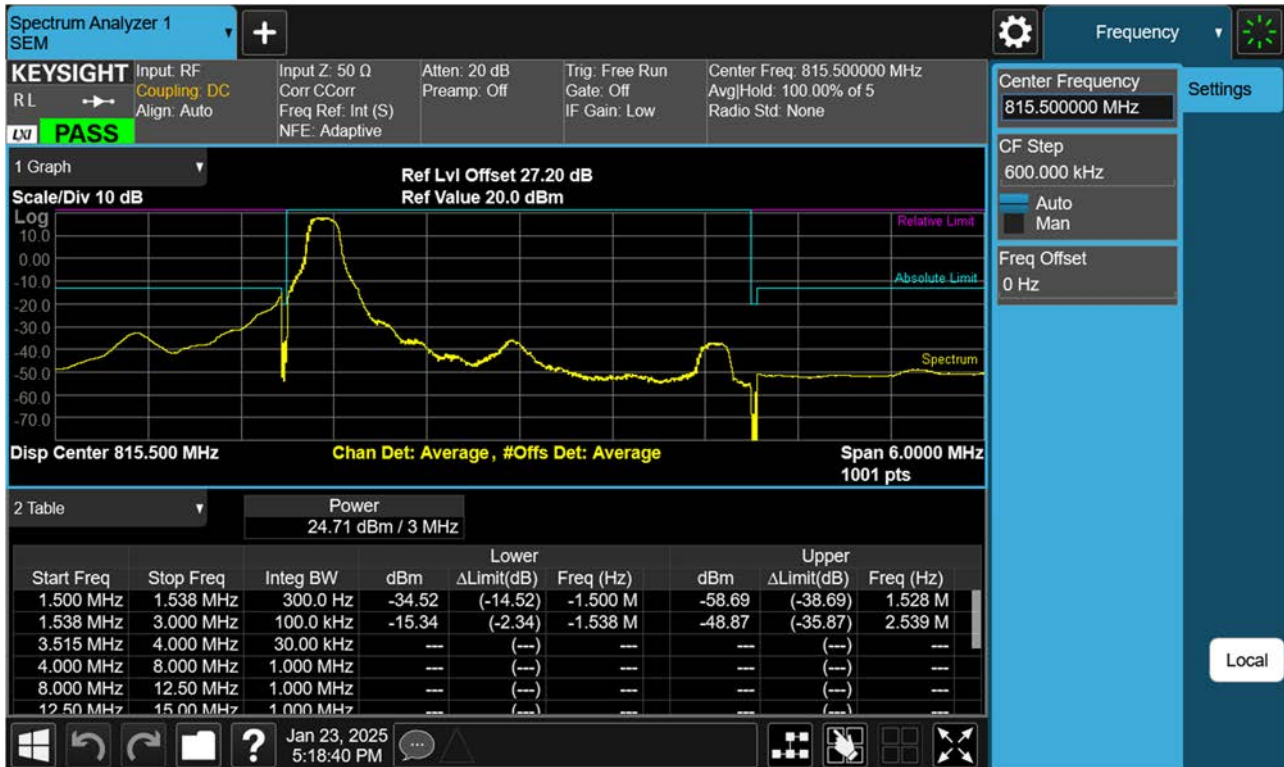


BAND 26. Lower Channel Edge Plot (3 M BW Ch.26705 QPSK_RB15_Offset 0)

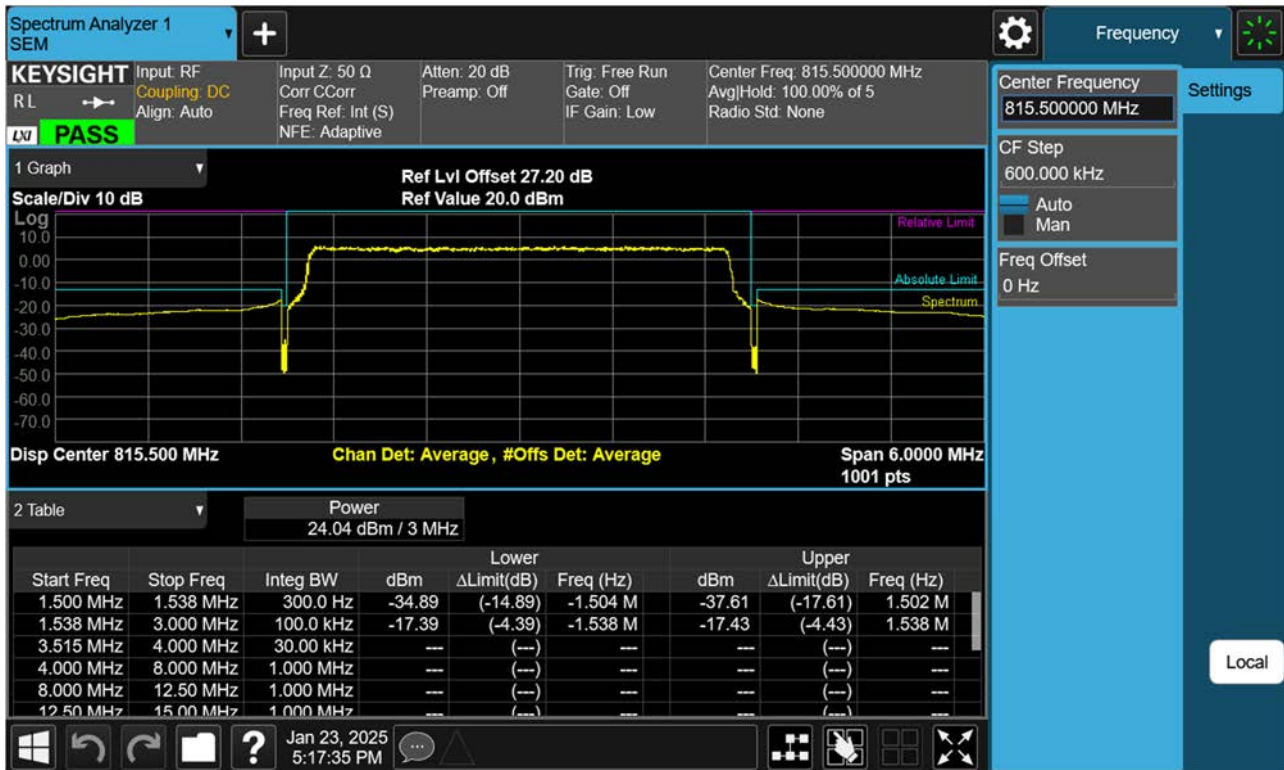


BAND 26. Lower Channel Edge Plot (5 M BW Ch.26715 QPSK RB 1, Offset 0)

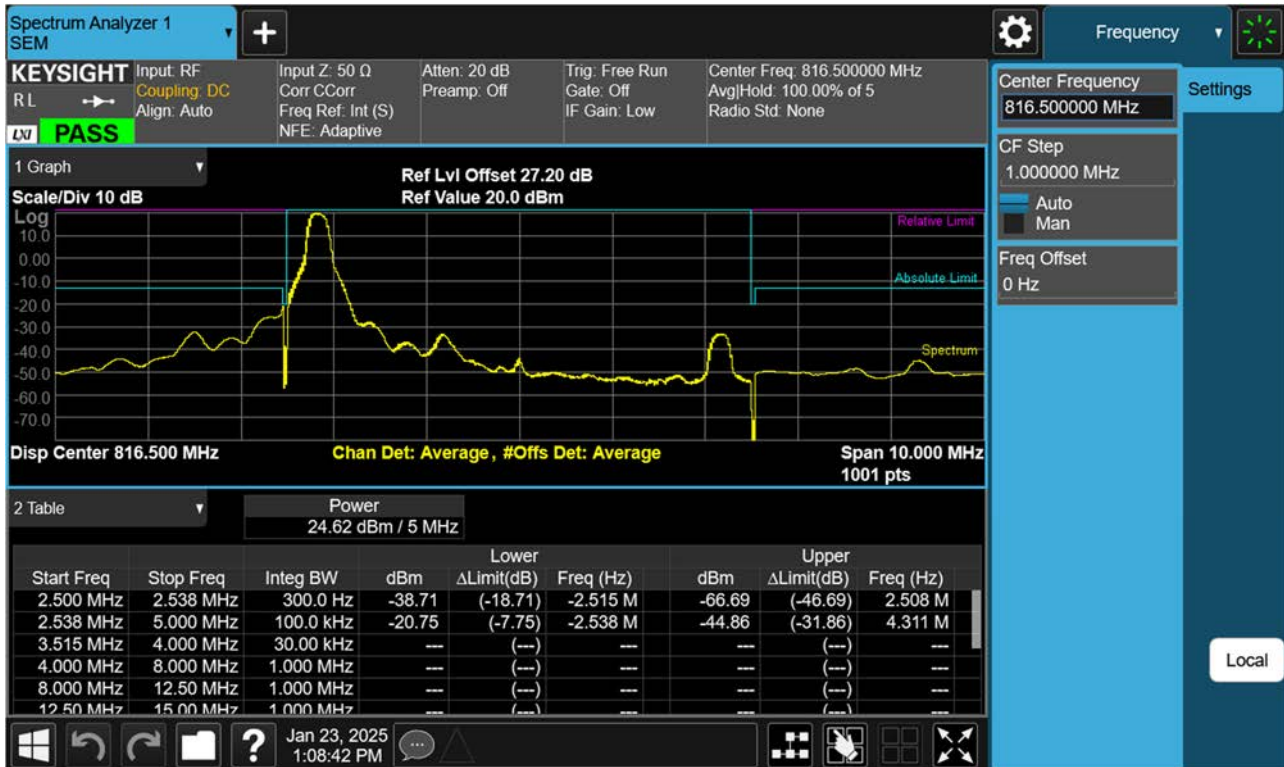


BAND 26. Lower Channel Edge Plot (5 M BW Ch.26715 QPSK_RB25_Offset 0)

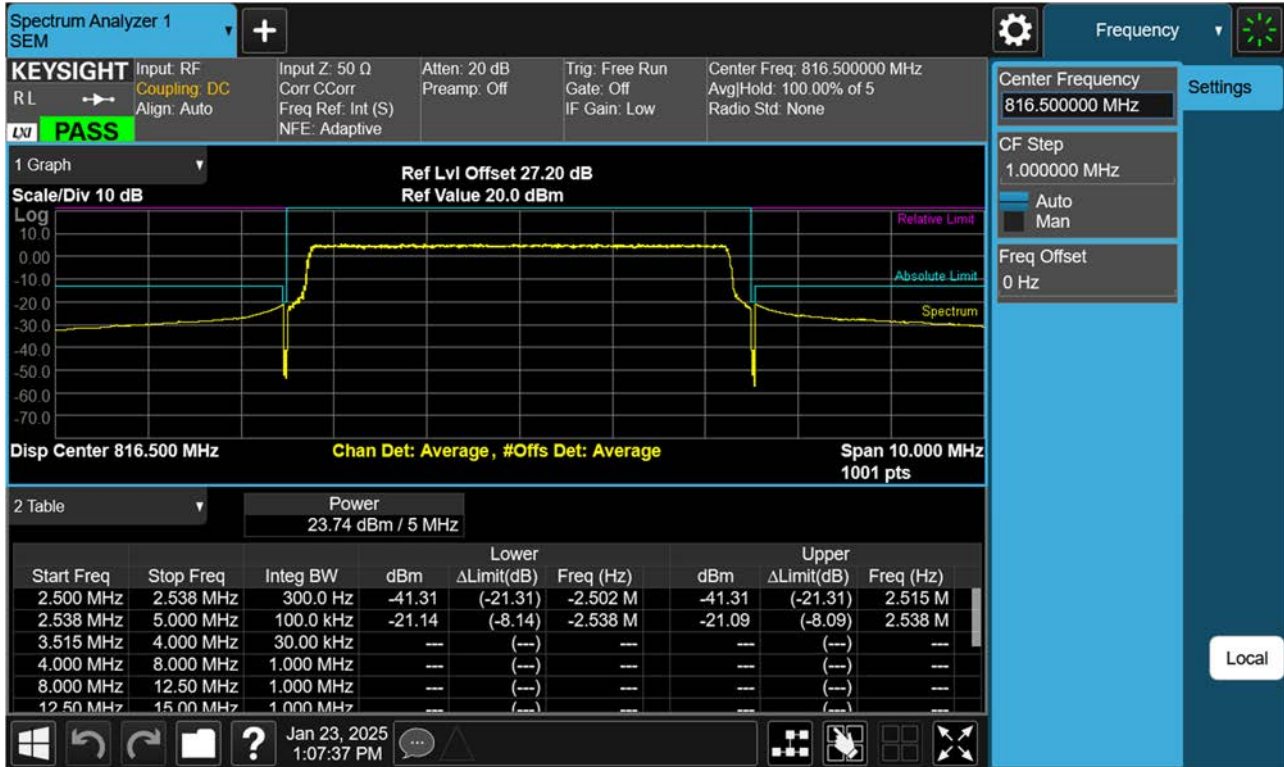


BAND 26. Low Channel Edge Plot (10 M BW Ch.26740 QPSK RB 1, Offset 0)

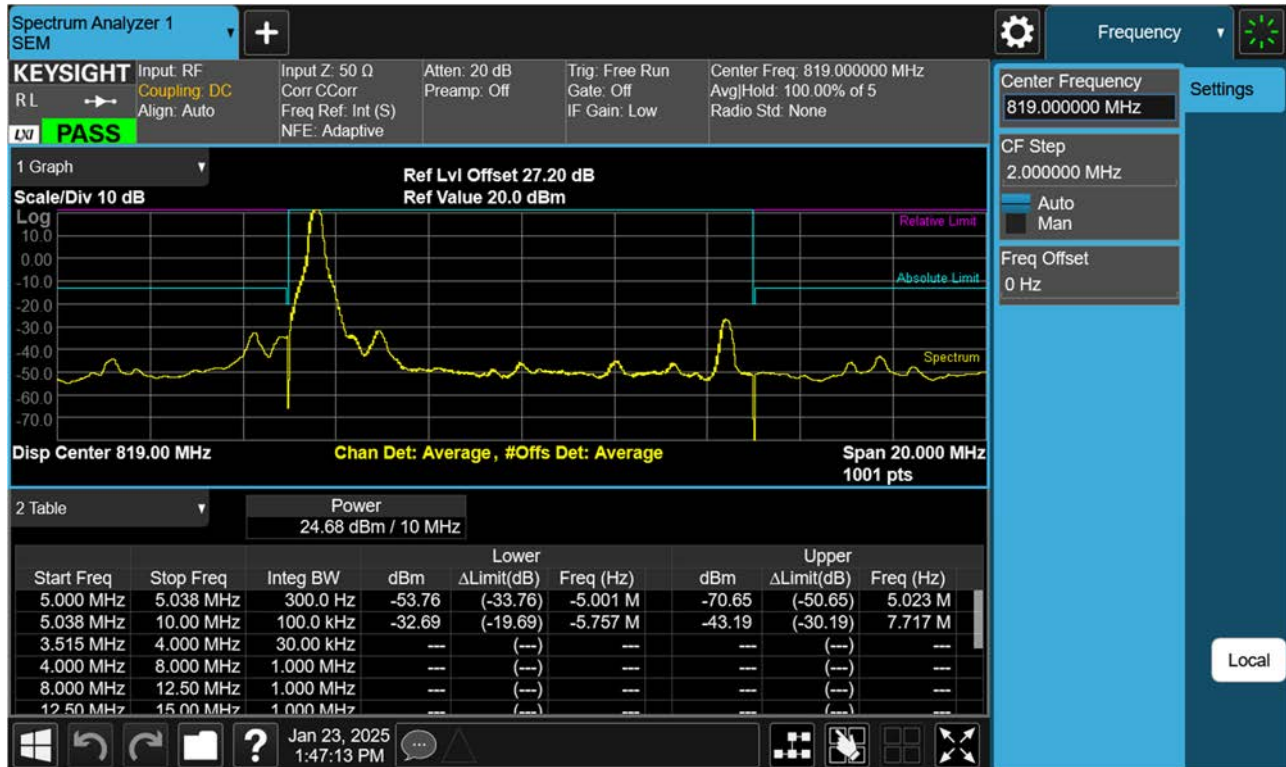


BAND 26. Low Channel Edge Plot (10 M BW Ch.26740 QPSK_RB50_Offset 0)

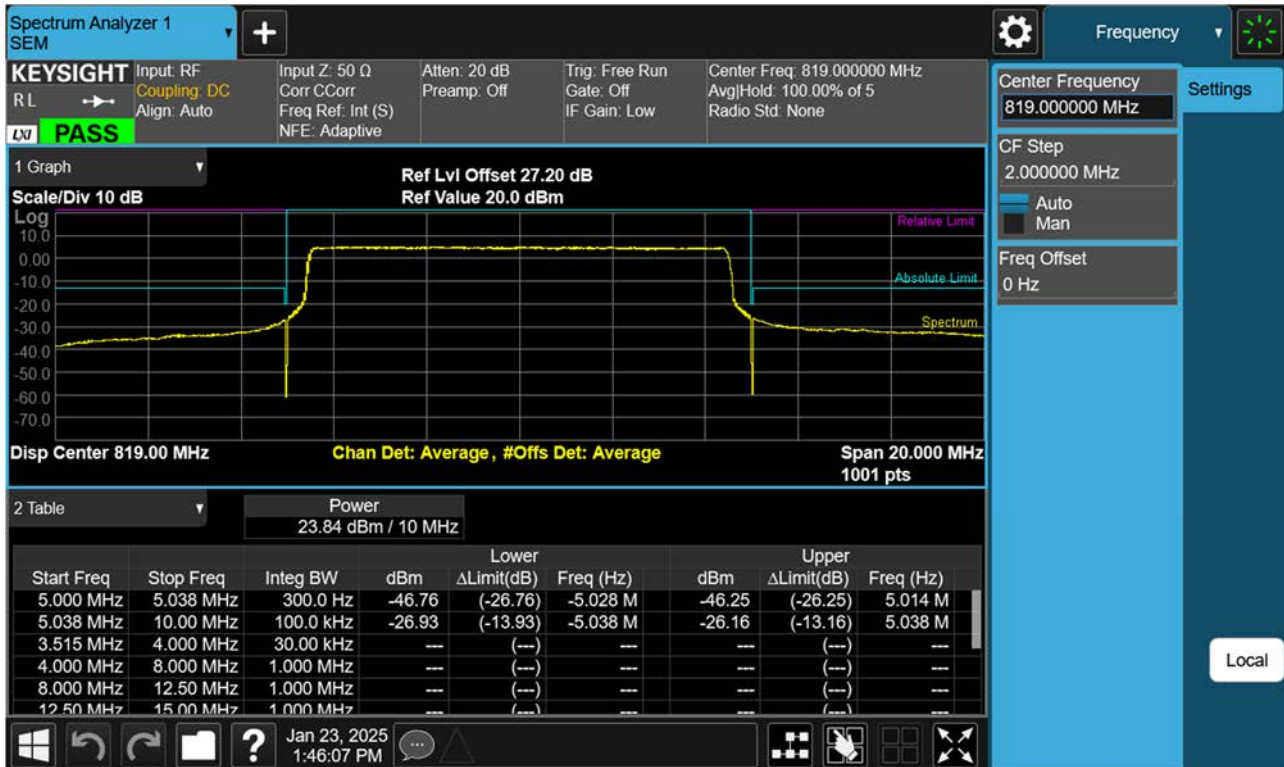


BAND 26. Mid Channel Edge Plot (10 M BW Ch. 26740 QPSK_RB1_Offset 49)

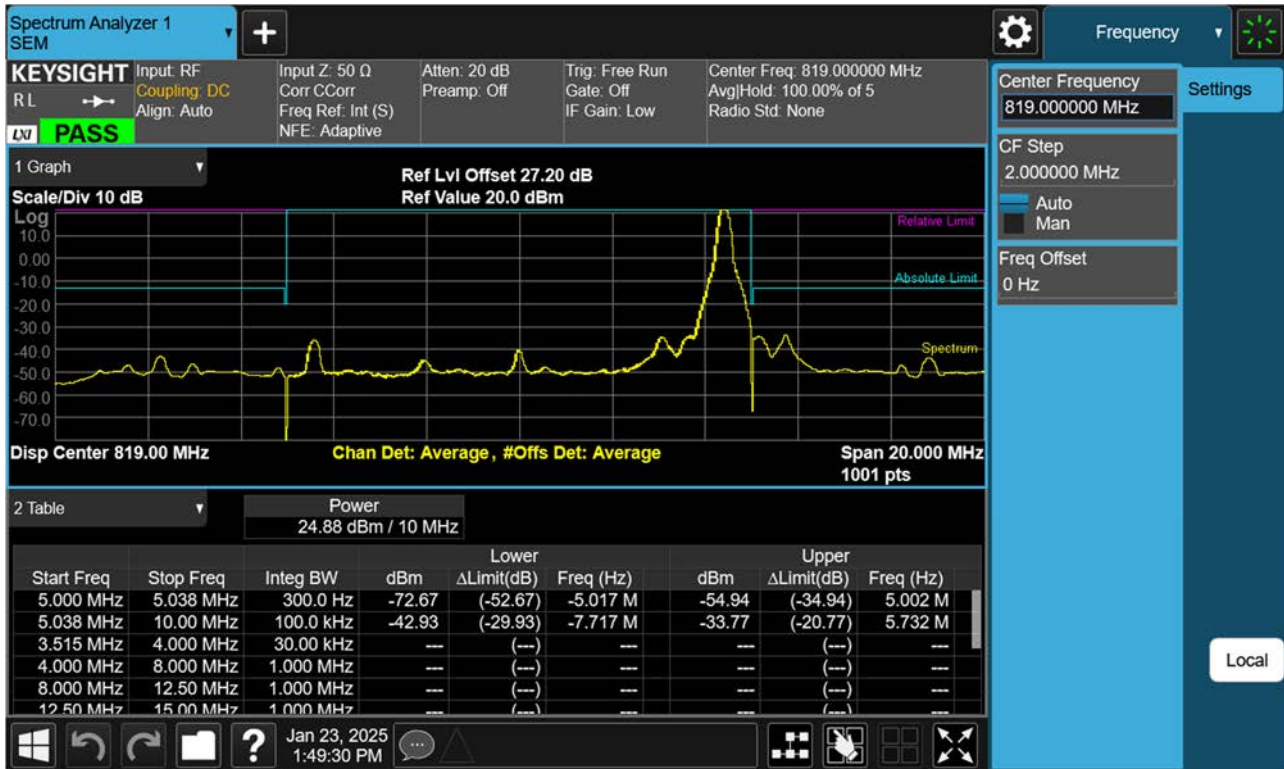


BAND 26. Low Channel Edge Plot (15 M BW Ch.26765 QPSK RB 1, Offset 0)

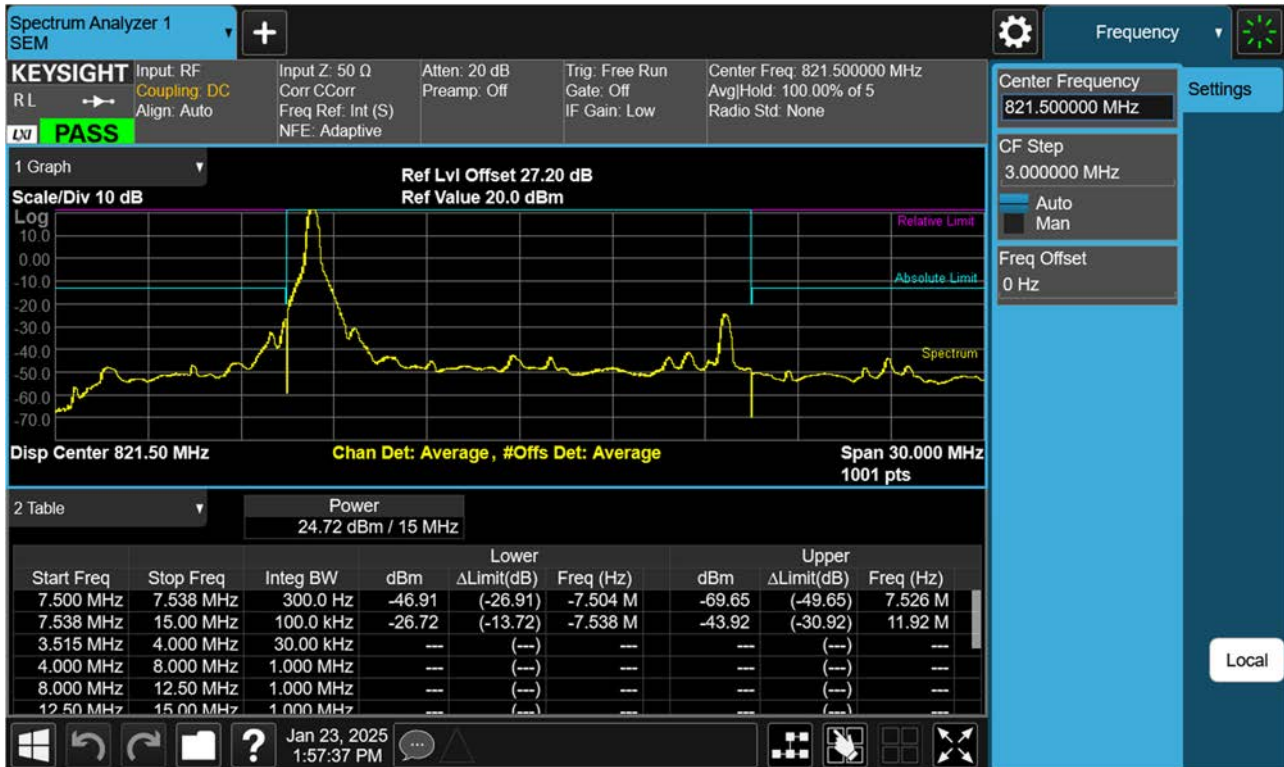

BAND 26. Low Channel Edge Plot (15 M BW Ch.26765 QPSK RB 75, Offset0)

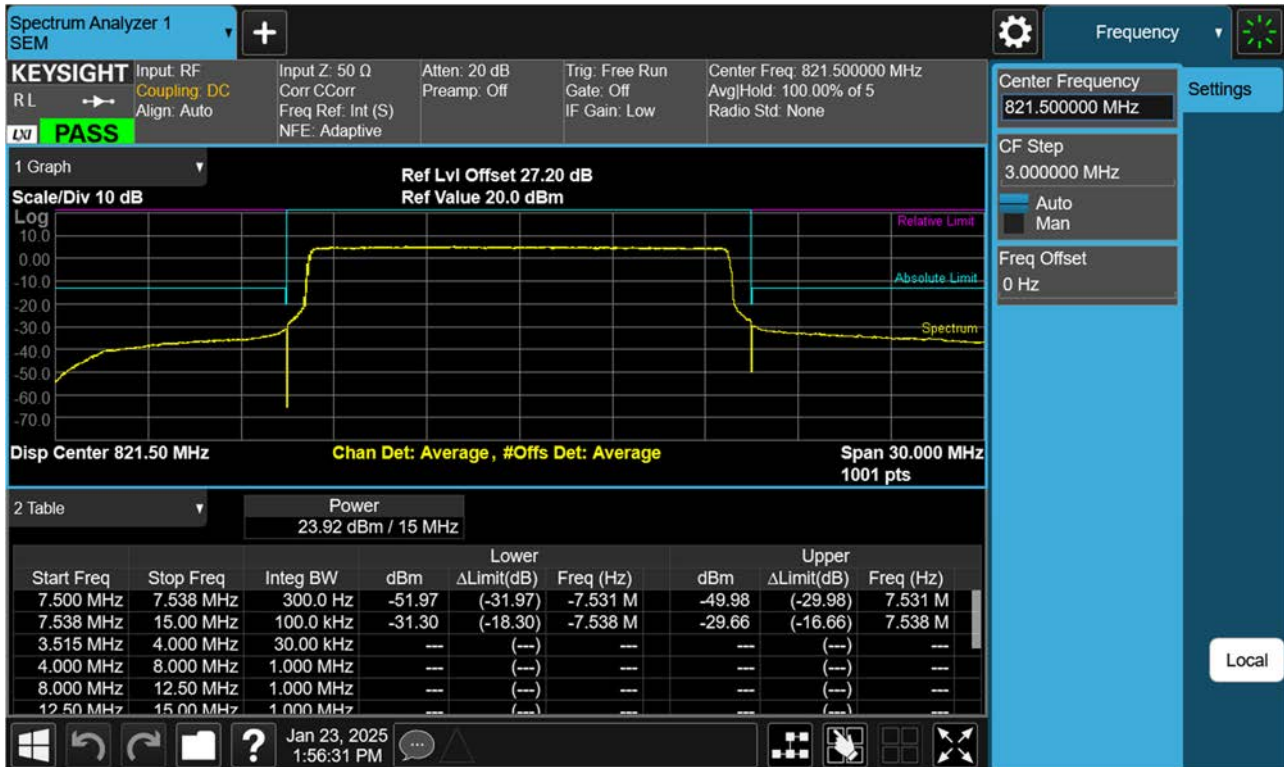

BAND 26. Mid Channel Edge Plot (15 M BW Ch.26765 QPSK_RB1_Offset 74)

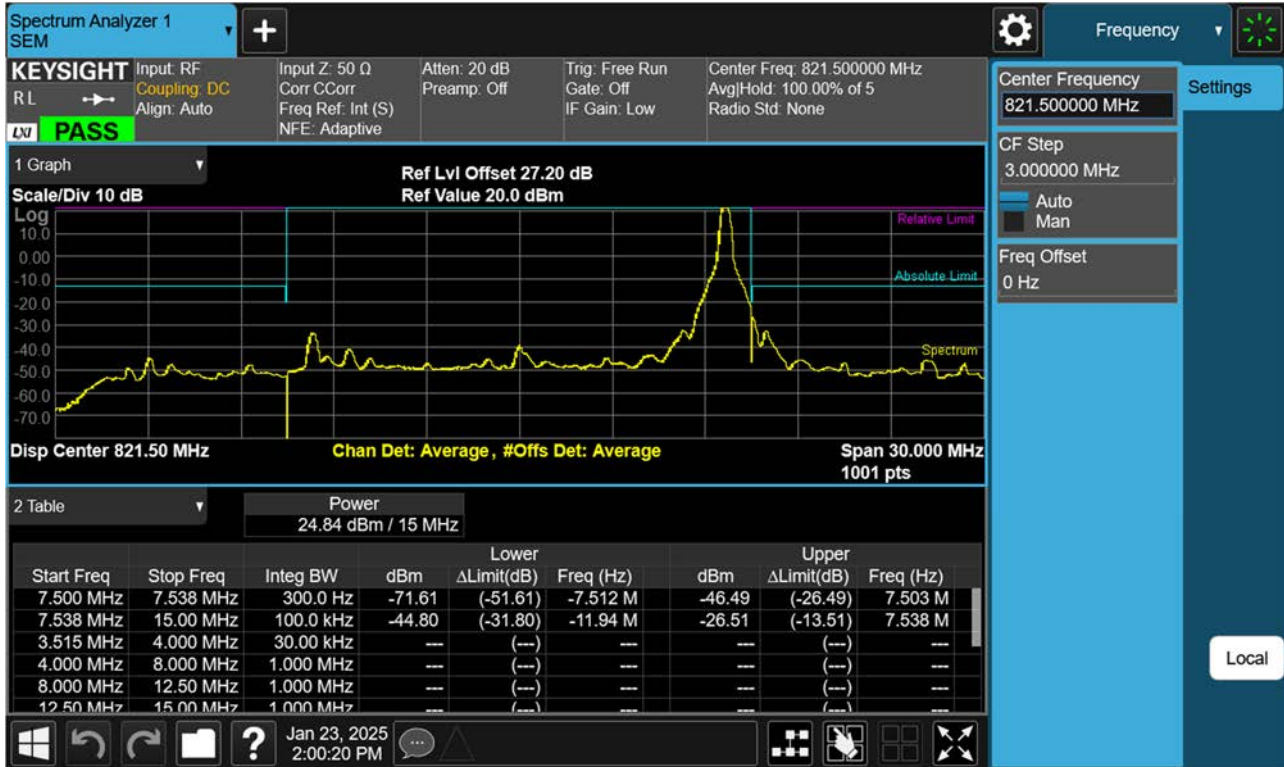


BAND 26. Mid Band Edge Plot (15 M BW Ch.26765 QPSK RB 1, Offset74)




BAND 26. Mid Band Edge Plot (15 M BW Ch.26765 QPSK_RB75_Offset 0)




BAND 26. Upper Channel Edge Plot (1.4 M BW Ch.26783 QPSK_RB1_Offset 5)

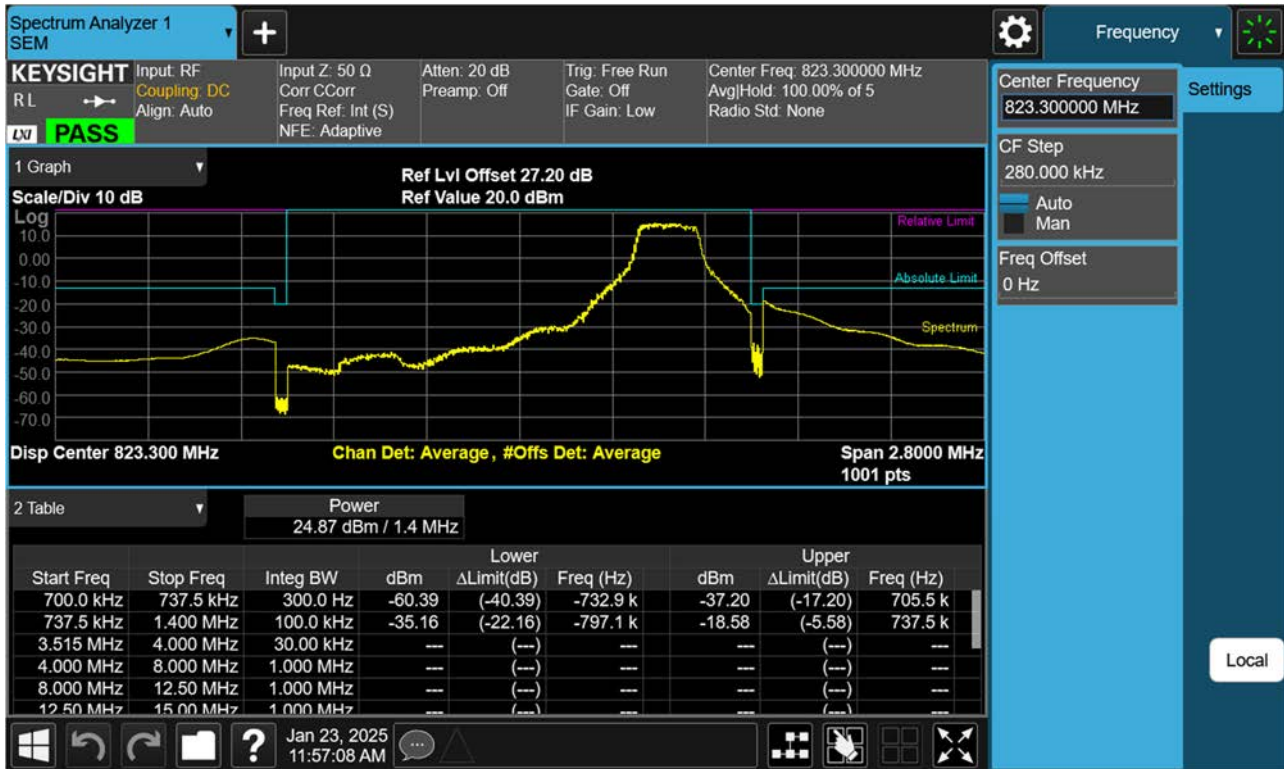


BAND 26. Upper Channel Edge Plot (1.4 M BW Ch.26783 QPSK_RB6_Offset 0)

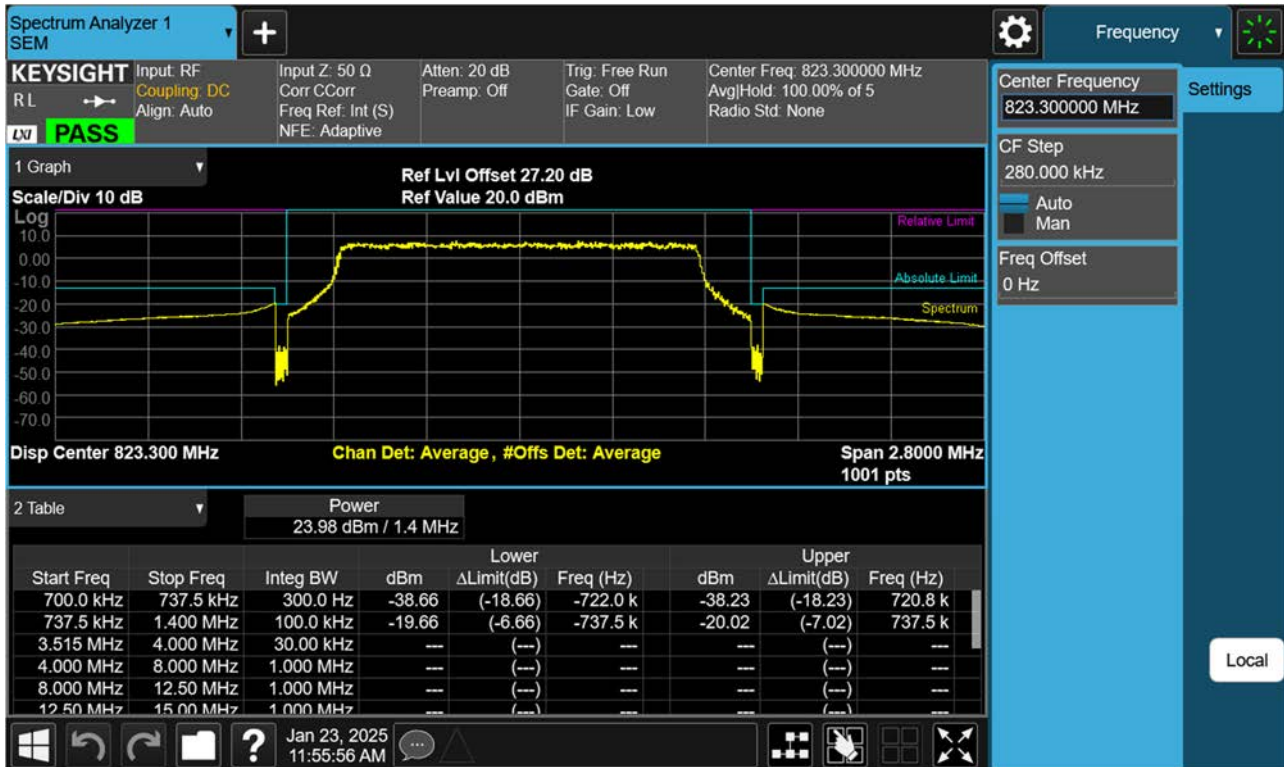


BAND 26. Upper Channel Edge Plot (3 M BW Ch.26775 QPSK_RB1_Offset 14)

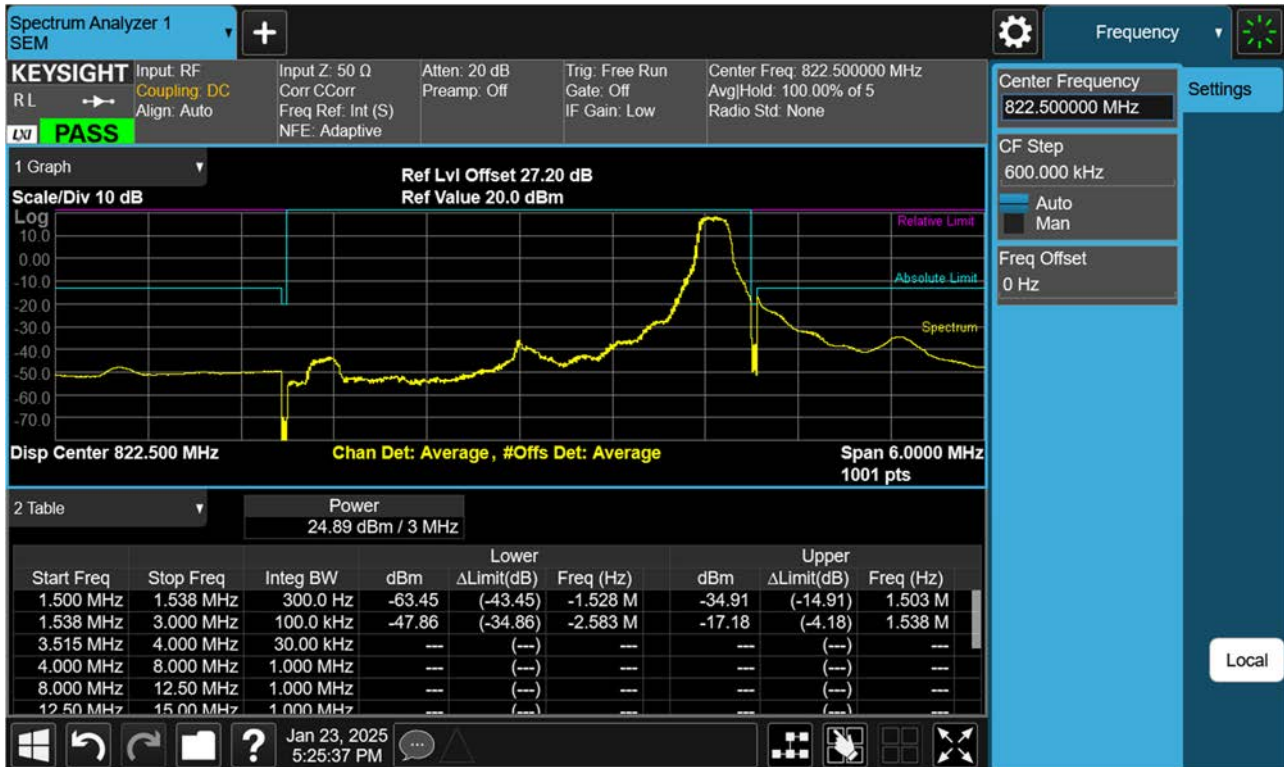


BAND 26. Upper Channel Edge Plot (3 M BW Ch.26775 QPSK_RB15_Offset 0)

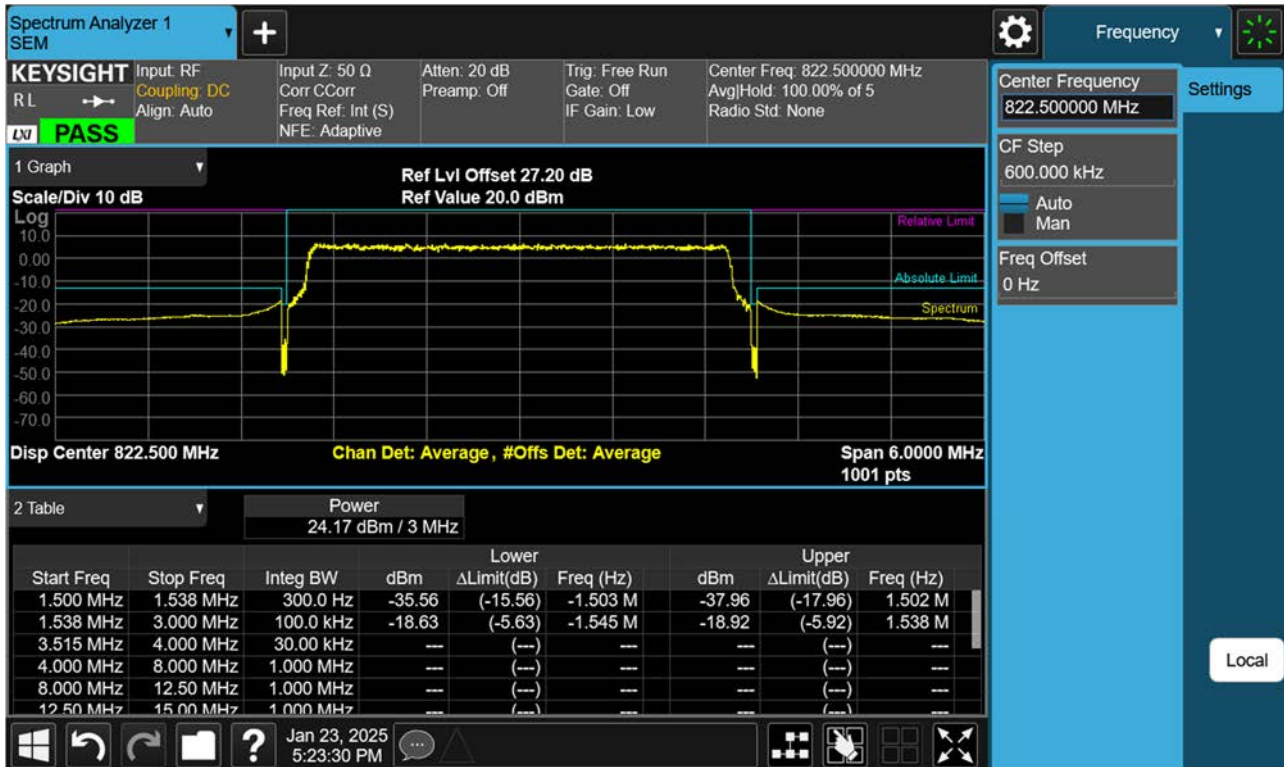


BAND 26. Upper Channel Edge Plot (5 M BW Ch.26765 QPSK_RB1_Offset 24)

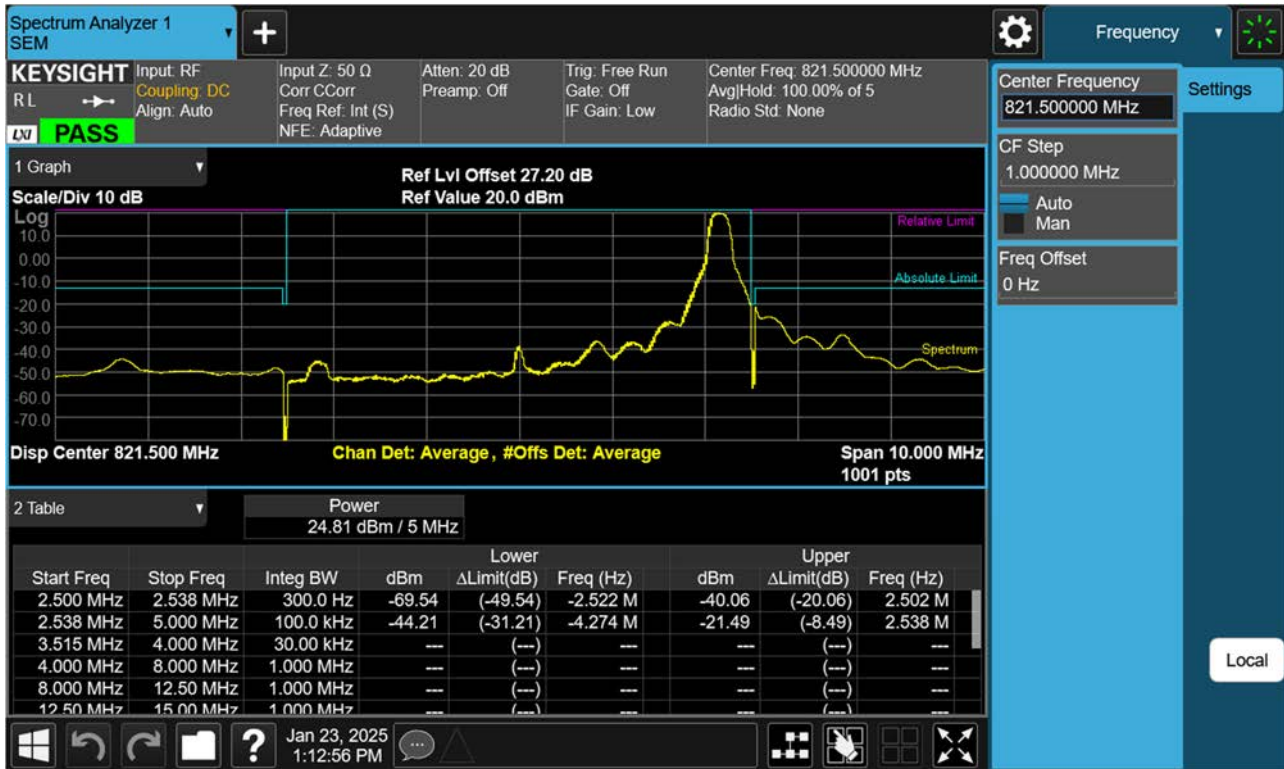


BAND 26. Upper Channel Edge Plot (5 M BW Ch.26765 QPSK_RB25_Offset 0)

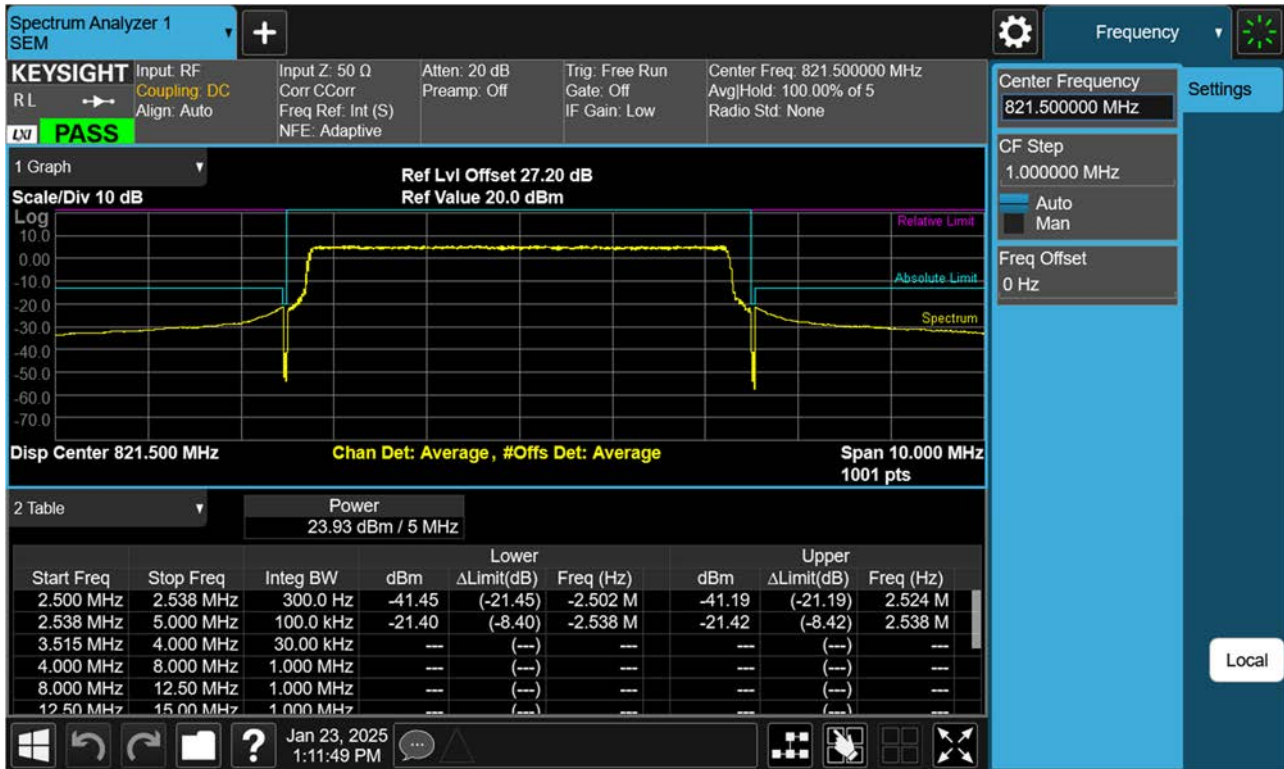


BAND 26. Conducted Spurious (26697 ch_1.4 MHz_QPSK_RB 1_0)

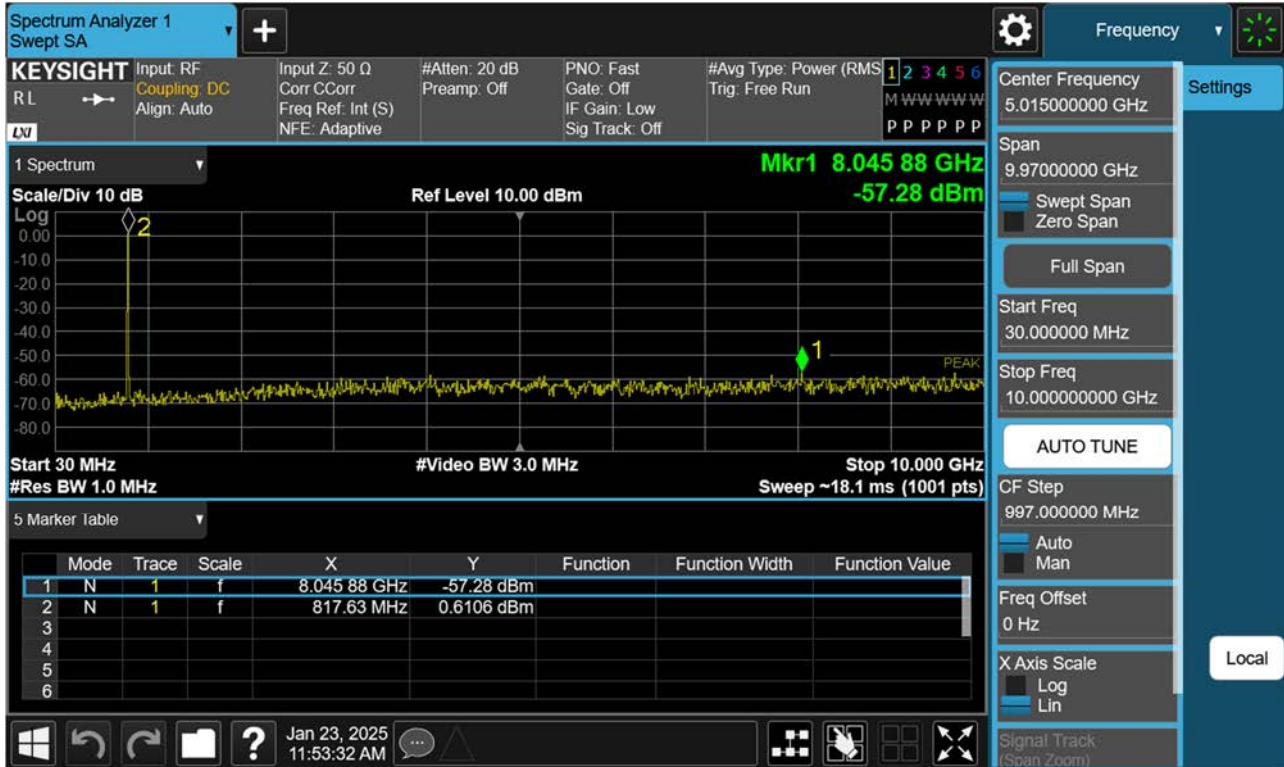


BAND 26. Conducted Spurious (26783 ch_1.4 MHz_QPSK_RB 1_0)

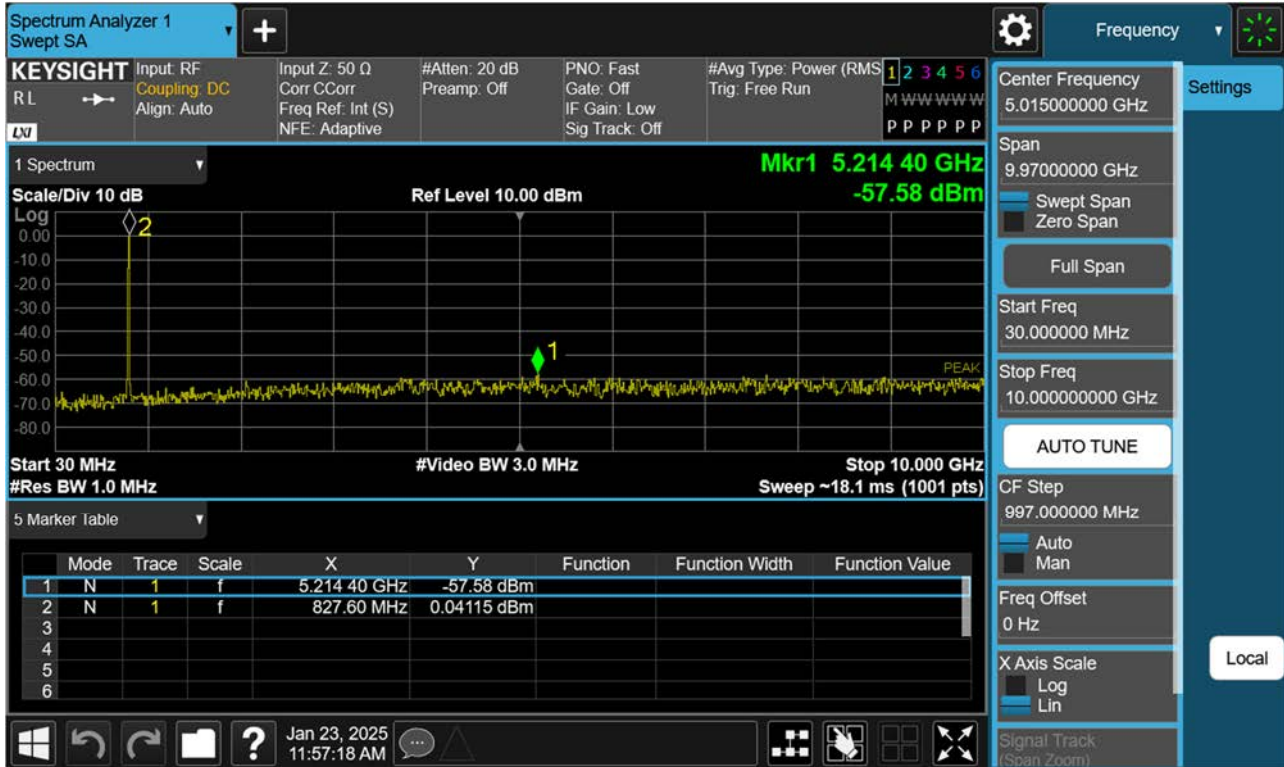


BAND 26. Conducted Spurious (26705 ch_3 MHz_QPSK_RB 1_0)

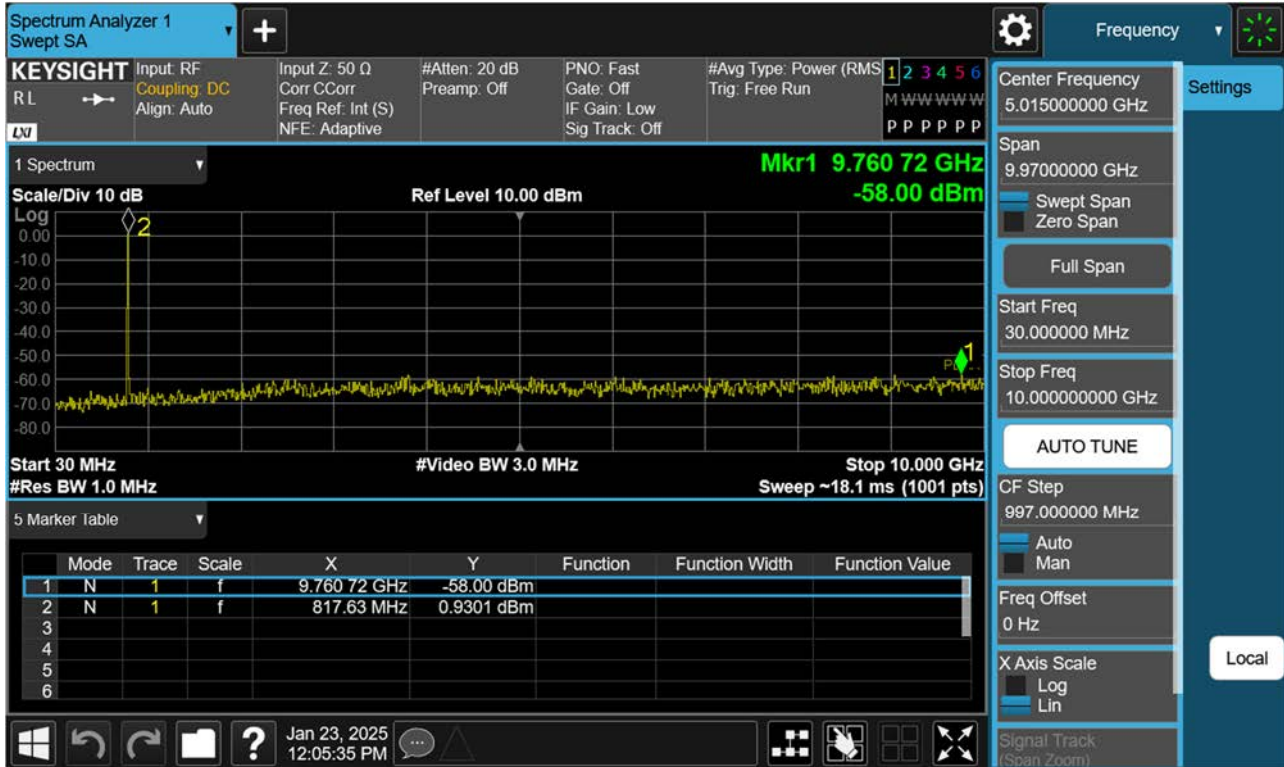


BAND 26. Conducted Spurious (26775 ch_3 MHz_QPSK_RB 1_0)

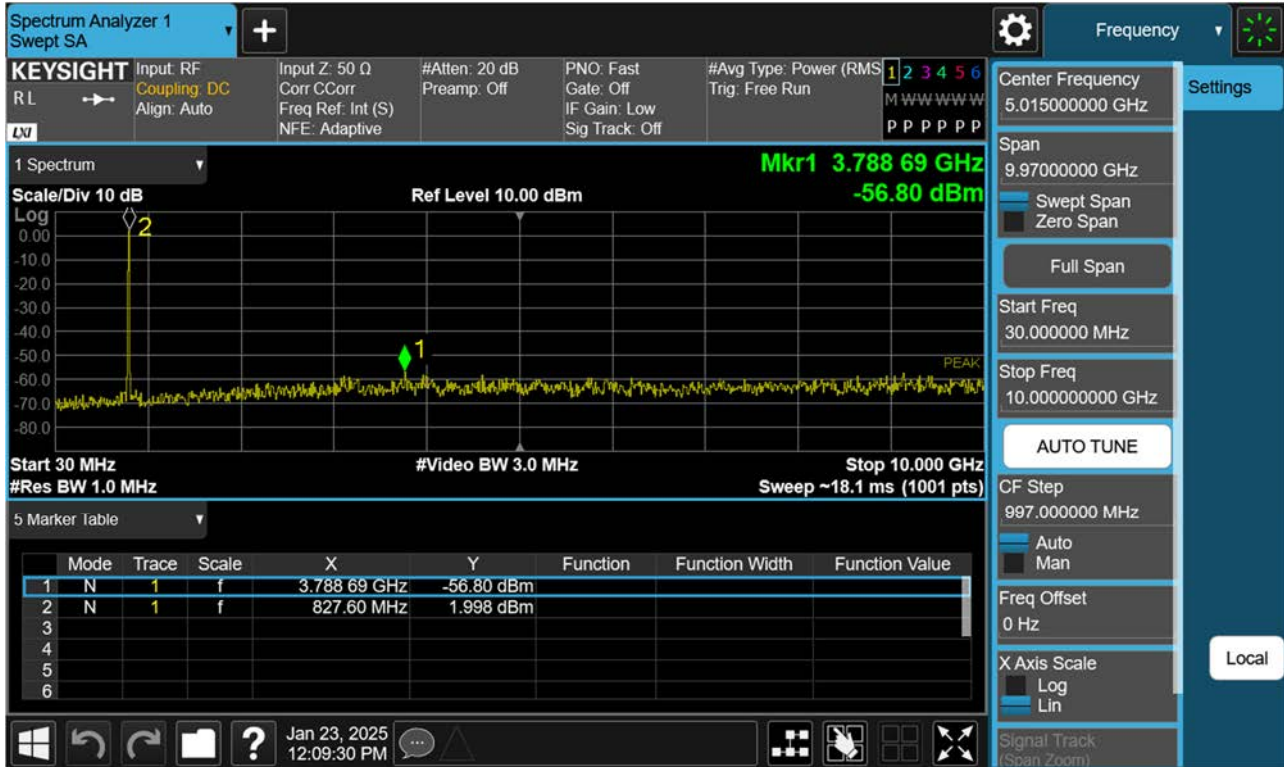


BAND 26. Conducted Spurious (26715 ch_5 MHz_QPSK_RB 1_0)

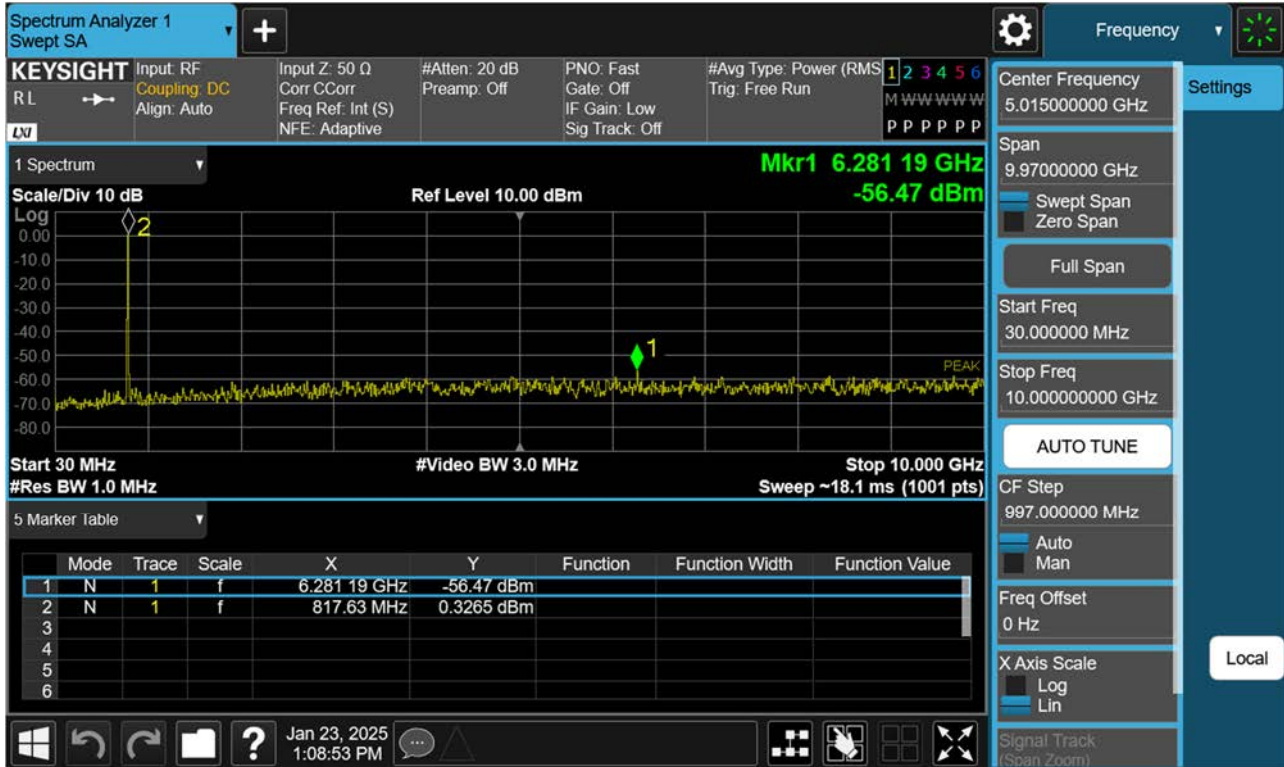


BAND 26. Conducted Spurious (26765 ch_5 MHz_QPSK_RB 1_0)

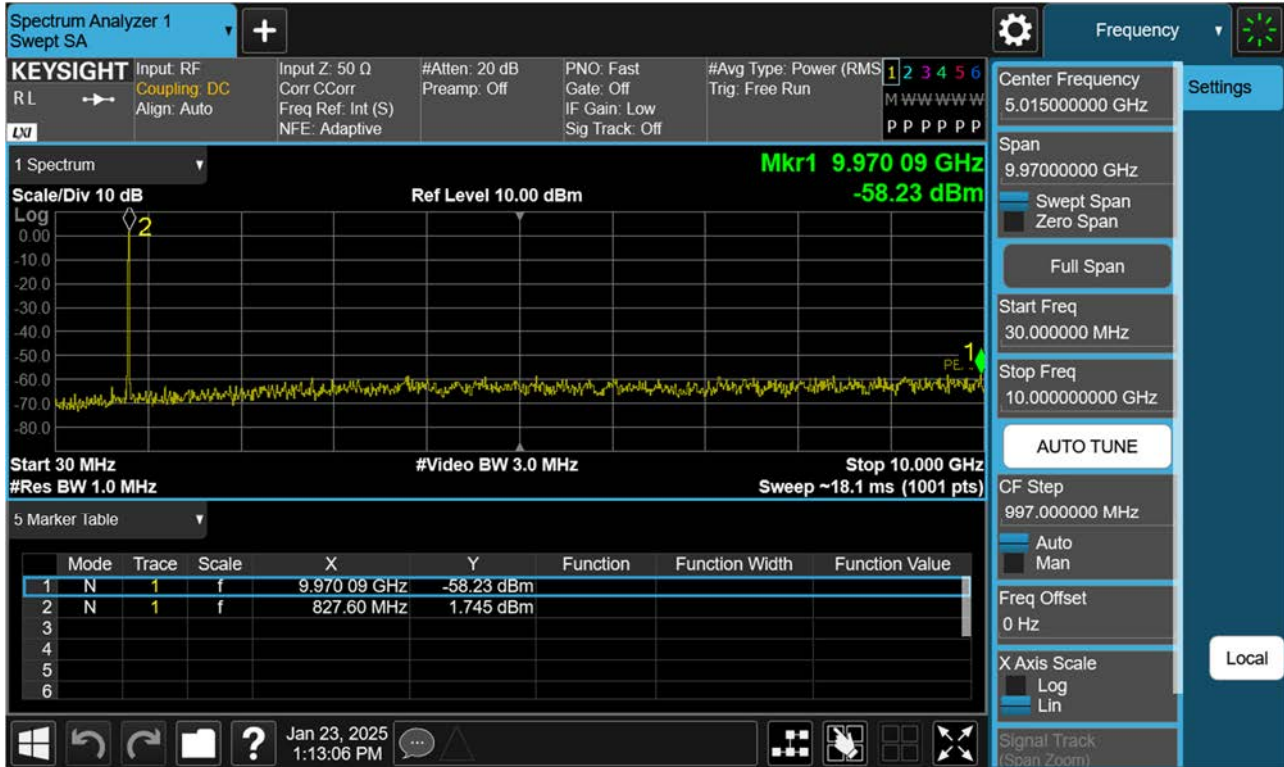

BAND 26. Conducted Spurious (26740 ch_10 MHz_QPSK_RB 1_0)

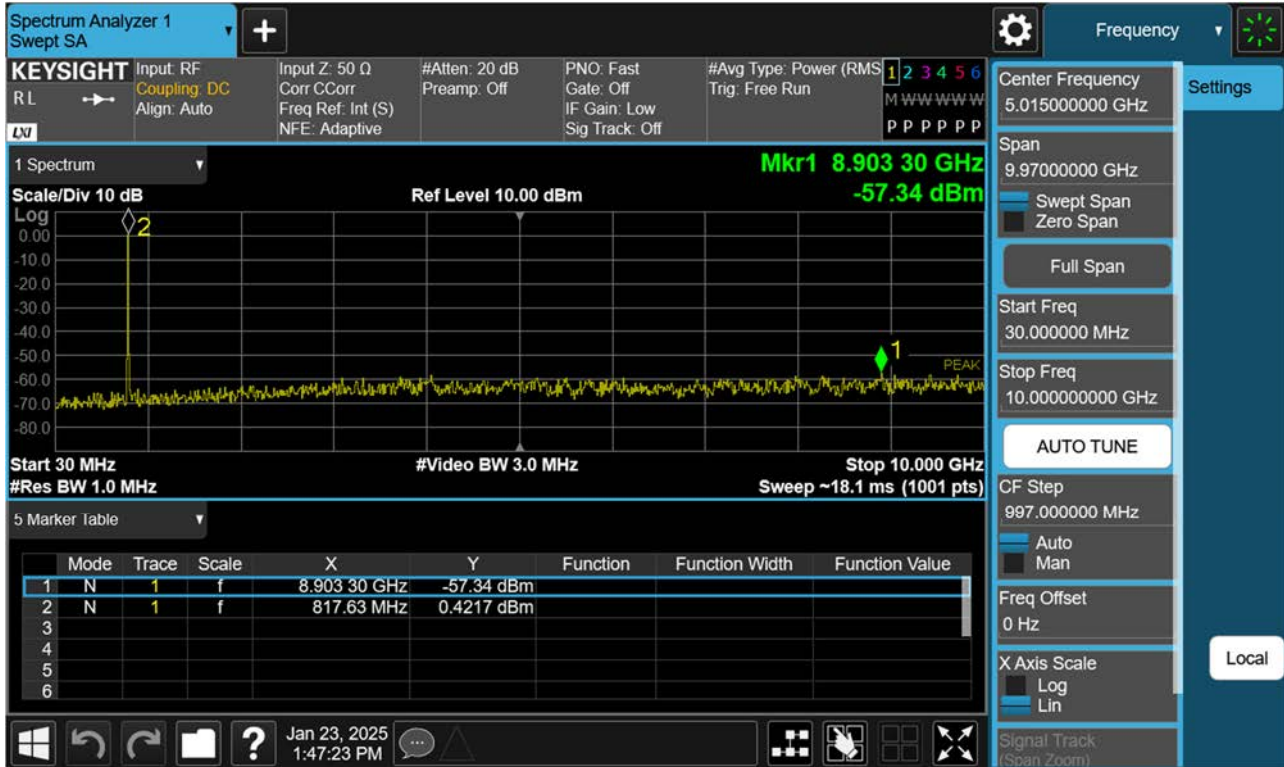


BAND 26. Conducted Spurious (26765 ch_15 MHz_QPSK_RB 1_0)

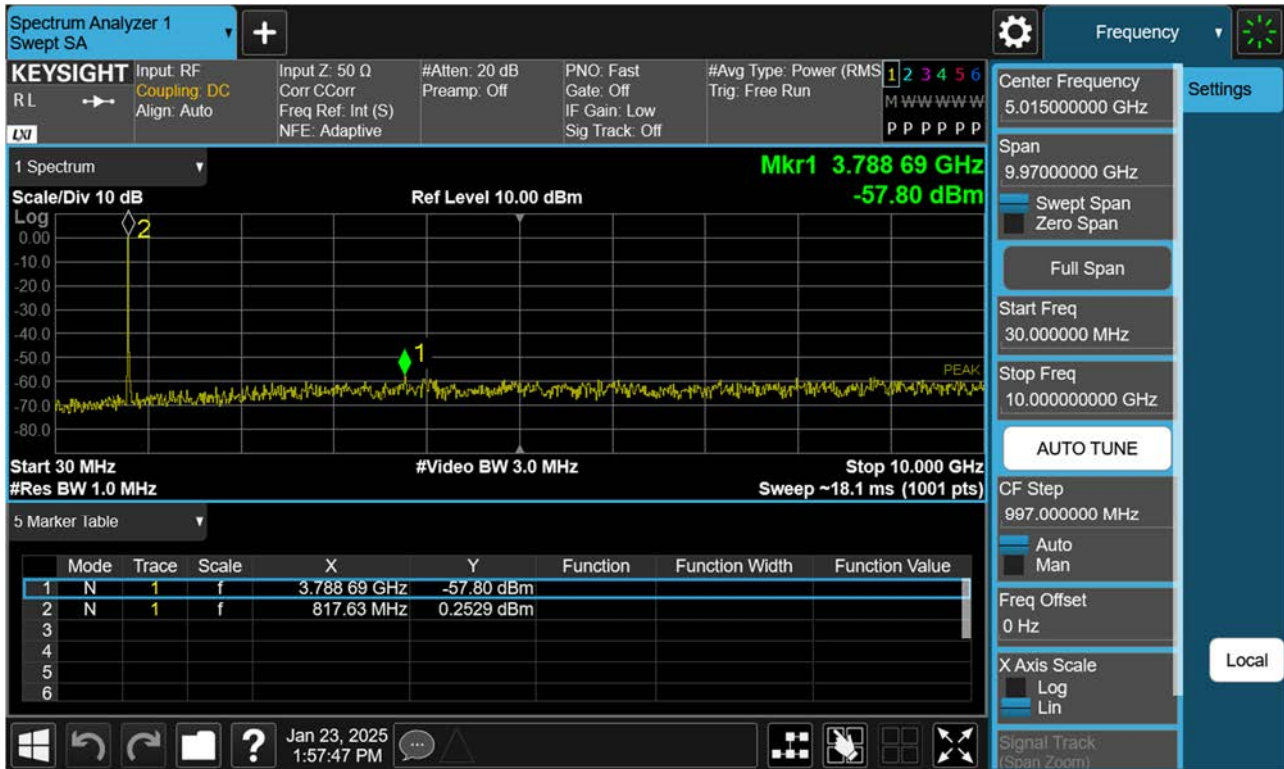

10. TEST PLOTS (STRADDLE CHANNEL)


BAND 26. Conducted Spurious (1.4 MHz_QPSK_RB 1_0)

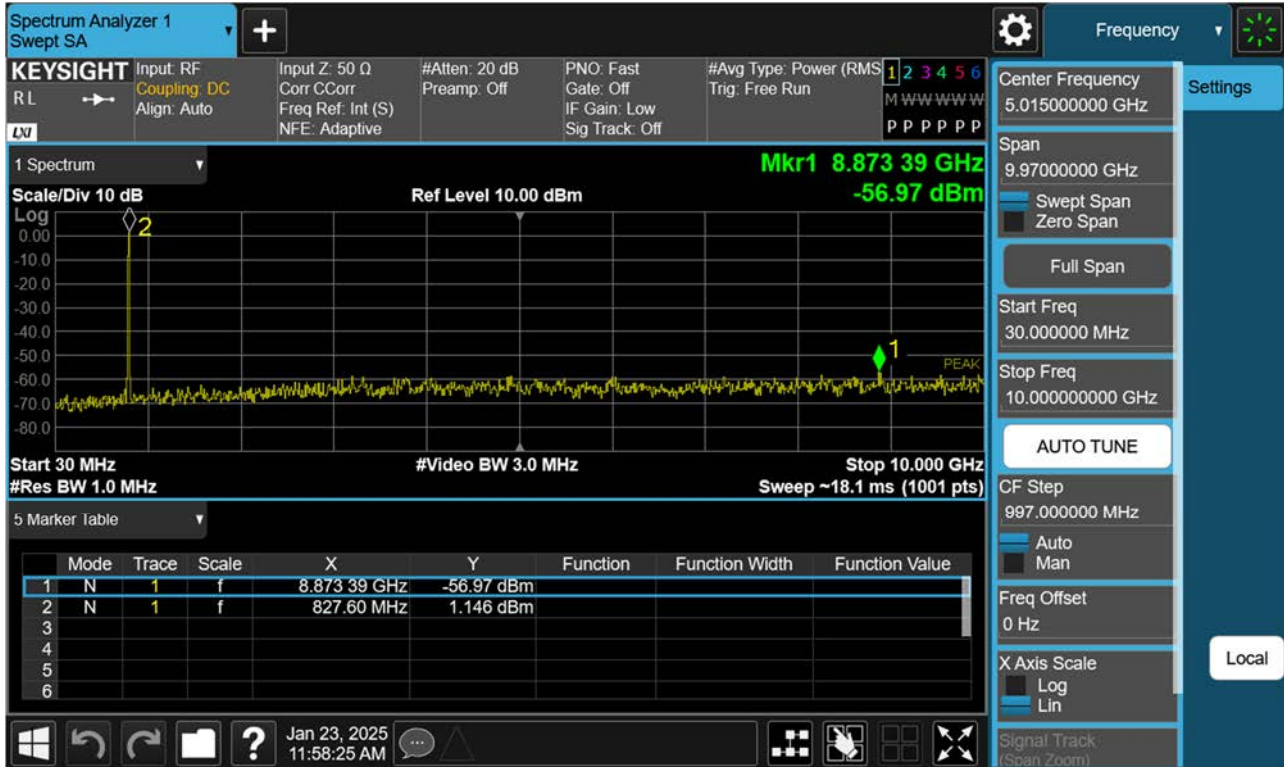


BAND 26. Conducted Spurious (3 MHz_QPSK_RB 1_0)




BAND 26. Conducted Spurious (5 MHz_QPSK_RB 1_0)

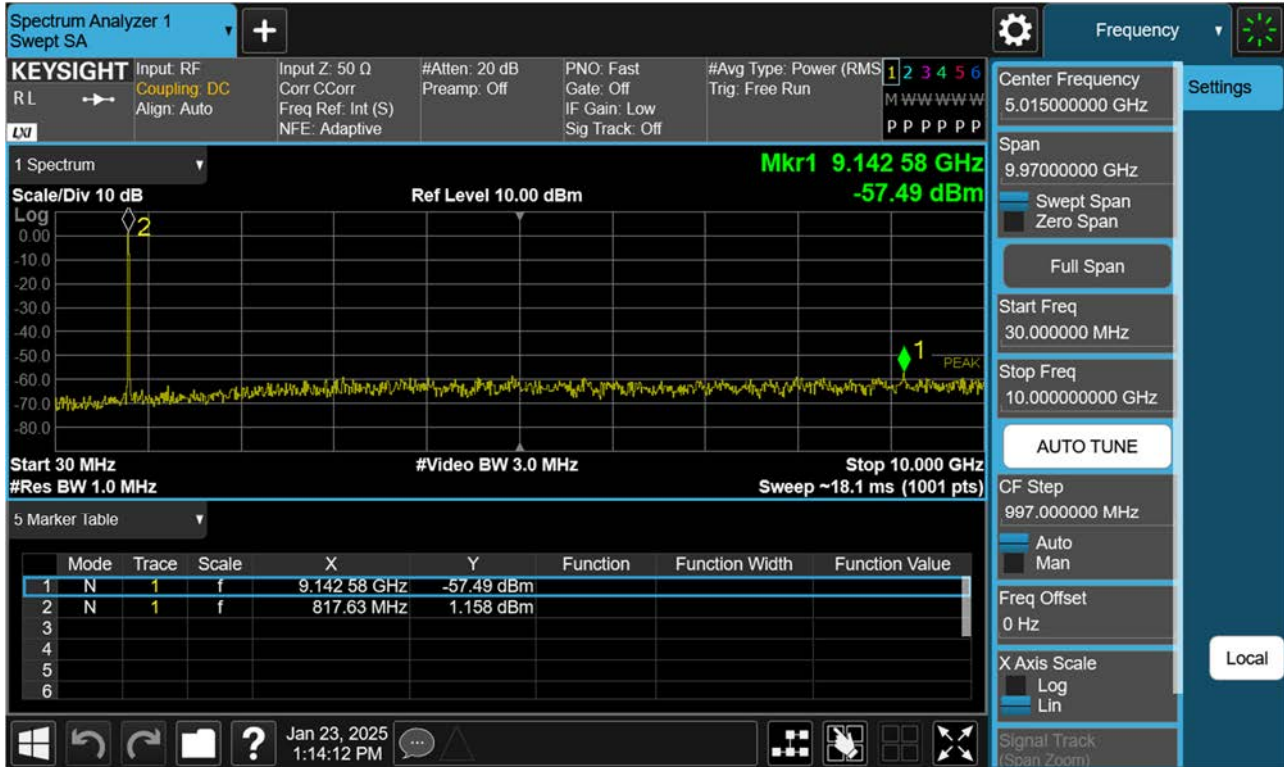

BAND 26. Conducted Spurious (10 MHz_QPSK_RB 1_0)

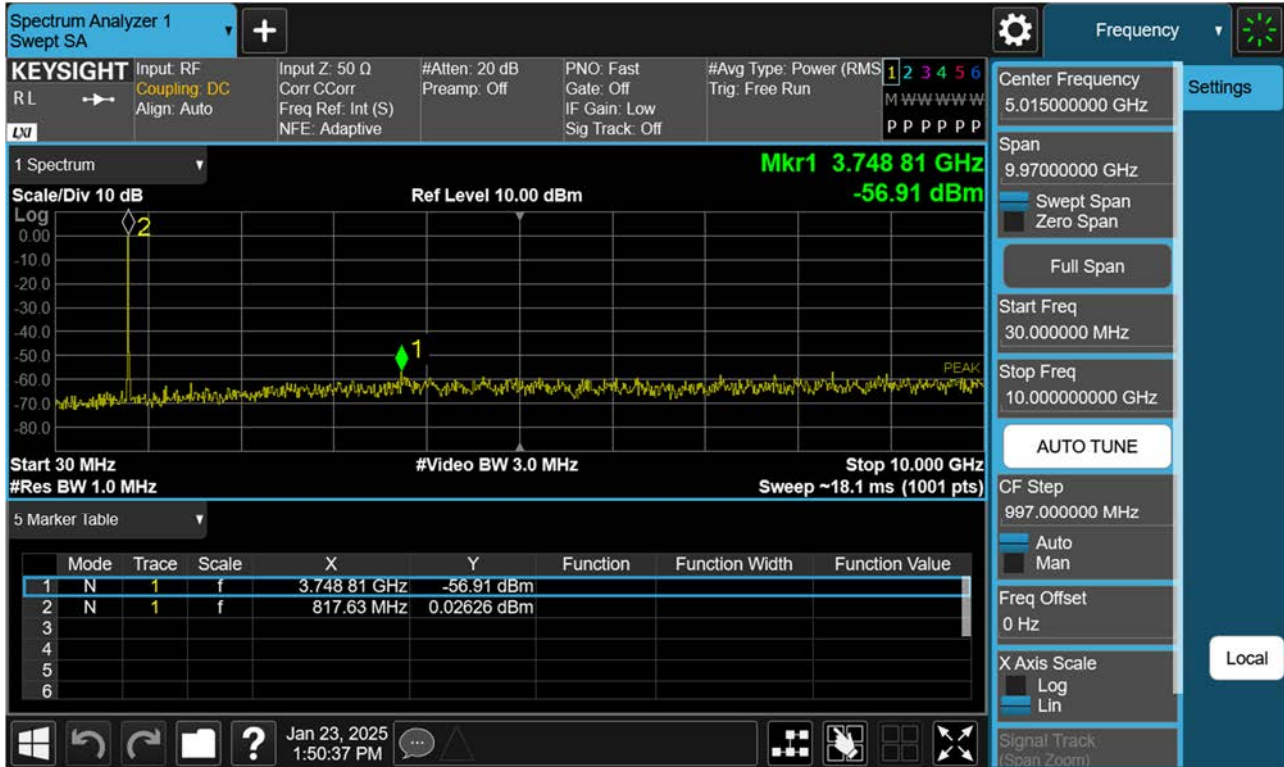

BAND 26. Channel Edge (1.4 MHz_QPSK_RB 1_0)

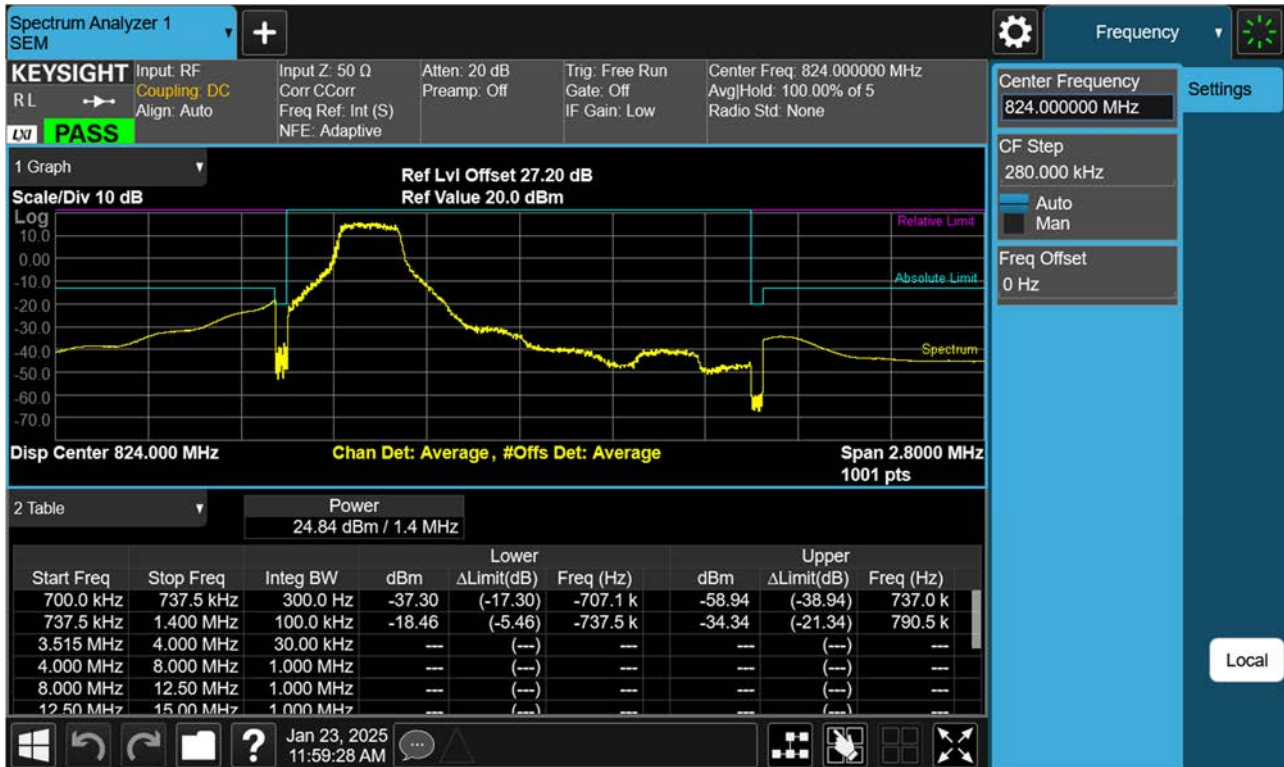

BAND 26. Channel Edge (1.4 MHz_QPSK_RB 1_5)

