

TEST REPORT

FCC LTE B66(4) Test for SM-X528U
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2502-FC013

DATE OF ISSUE
February 10, 2025

Tested by
Jae Mun Do



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2502-FC013

DATE OF ISSUE

February 10, 2025

Applicant**SAMSUNG Electronics Co., Ltd.**

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name

Tablet

Model Name

SM-X528U

Date of Test

January 02, 2025 ~ February 07, 2025

FCC ID

A3LSMX528U

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

FCC Classification:

PCS Licensed Transmitter (PCB)

Test Standard Used

FCC Rule Part: § 27

Test Results

PASS

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	February 10, 2025	Initial Release

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. GENERAL INFORMATION	5
1.1. MAXIMUM OUTPUT POWER.....	6
2. INTRODUCTION	8
2.1. DESCRIPTION OF EUT	8
2.2. MEASURING INSTRUMENT CALIBRATION	8
2.3. TEST FACILITY	8
3. DESCRIPTION OF TESTS	9
3.1 TEST PROCEDURE.....	9
3.2 RADIATED POWER	10
3.3 RADIATED SPURIOUS EMISSIONS	11
3.4 PEAK- TO- AVERAGE RATIO.....	12
3.5 OCCUPIED BANDWIDTH.	14
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	15
3.7 BAND EDGE.....	16
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	18
3.9 WORST CASE(RADIATED TEST).....	19
3.10 WORST CASE(CONDUCTED TEST)	20
4. LIST OF TEST EQUIPMENT	21
5. MEASUREMENT UNCERTAINTY	22
6. SUMMARY OF TEST RESULTS	23
7. SAMPLE CALCULATION	24
8. TEST DATA(Main 1 ANT)	26
8.1 EQUIVALENT ISOTROPIC RADIATED POWER	26
8.2 RADIATED SPURIOUS EMISSIONS	29
8.3 PEAK-TO-AVERAGE RATIO	30
8.4 OCCUPIED BANDWIDTH	31
8.5 CONDUCTED SPURIOUS EMISSIONS.....	32
8.6 BAND EDGE.....	32
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	33
9. TEST DATA(Sub 1 ANT).....	51
9.1 EQUIVALENT ISOTROPIC RADIATED POWER	51
9.2 RADIATED SPURIOUS EMISSIONS	54
9.3 PEAK-TO-AVERAGE RATIO	55
9.4 OCCUPIED BANDWIDTH	56
9.5 CONDUCTED SPURIOUS EMISSIONS.....	57
9.6 BAND EDGE.....	57
9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	58
10. TEST PLOTS(Main 1 ANT)	76
11. TEST PLOTS(Sub 1 ANT).....	197
12. ANNEX A_ TEST SETUP PHOTO	318

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMX528U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§ 27
EUT Type:	Tablet
Model(s):	SM-X528U
Tx Frequency:	1710.7 MHz – 1779.3 MHz (LTE – Band 66/4 (1.4 MHz)) 1711.5 MHz – 1778.5 MHz (LTE – Band 66/4 (3 MHz)) 1712.5 MHz – 1777.5 MHz (LTE – Band 66/4 (5 MHz)) 1715.0 MHz – 1775.0 MHz (LTE – Band 66/4 (10 MHz)) 1717.5 MHz – 1772.5 MHz (LTE – Band 66/4 (15 MHz)) 1720.0 MHz – 1770.0 MHz (LTE – Band 66/4 (20 MHz))
Date(s) of Tests:	January 02, 2025 ~ February 07, 2025
Serial number:	Radiated : R32XC00A68K Conducted : R32XC00A9JV

1.1. MAXIMUM OUTPUT POWER

Main 1 ANT

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band66/4 (1.4)	1710.7 – 1779.3	1M10G7D	QPSK	0.367	25.65
		1M09W7D	16-QAM	0.315	24.98
		1M09W7D	64-QAM	0.243	23.85
		1M09W7D	256-QAM	0.118	20.72
LTE – Band66/4 (3)	1711.5 – 1778.5	2M71G7D	QPSK	0.372	25.70
		2M70W7D	16-QAM	0.319	25.04
		2M70W7D	64-QAM	0.247	23.93
		2M71W7D	256-QAM	0.121	20.81
LTE – Band66/4 (5)	1712.5 – 1777.5	4M52G7D	QPSK	0.385	25.85
		4M51W7D	16-QAM	0.326	25.13
		4M52W7D	64-QAM	0.252	24.01
		4M55W7D	256-QAM	0.122	20.85
LTE – Band66/4 (10)	1715.0 – 1775.0	9M00G7D	QPSK	0.389	25.90
		9M01W7D	16-QAM	0.325	25.12
		9M01W7D	64-QAM	0.251	24.00
		9M03W7D	256-QAM	0.125	20.96
LTE – Band66/4 (15)	1717.5 – 1772.5	13M5G7D	QPSK	0.388	25.89
		13M5W7D	16-QAM	0.327	25.15
		13M5W7D	64-QAM	0.252	24.02
		13M4W7D	256-QAM	0.124	20.92
LTE – Band66/4 (20)	1720.0 – 1770.0	18M0G7D	QPSK	0.381	25.81
		17M9W7D	16-QAM	0.319	25.04
		17M9W7D	64-QAM	0.247	23.92
		18M0W7D	256-QAM	0.122	20.86

Sub 1 ANT

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band66/4 (1.4)	1710.7 – 1779.3	1M10G7D	QPSK	0.131	21.16
		1M09W7D	16-QAM	0.108	20.34
		1M09W7D	64-QAM	0.084	19.23
		1M09W7D	256-QAM	0.041	16.11
LTE – Band66/4 (3)	1711.5 – 1778.5	2M71G7D	QPSK	0.128	21.07
		2M70W7D	16-QAM	0.109	20.39
		2M70W7D	64-QAM	0.085	19.28
		2M71W7D	256-QAM	0.041	16.16
LTE – Band66/4 (5)	1712.5 – 1777.5	4M52G7D	QPSK	0.130	21.13
		4M50W7D	16-QAM	0.110	20.43
		4M51W7D	64-QAM	0.085	19.31
		4M55W7D	256-QAM	0.042	16.20
LTE – Band66/4 (10)	1715.0 – 1775.0	9M01G7D	QPSK	0.130	21.15
		9M00W7D	16-QAM	0.109	20.36
		9M00W7D	64-QAM	0.084	19.26
		9M01W7D	256-QAM	0.042	16.26
LTE – Band66/4 (15)	1717.5 – 1772.5	13M5G7D	QPSK	0.122	20.85
		13M5W7D	16-QAM	0.103	20.11
		13M5W7D	64-QAM	0.079	18.99
		13M5W7D	256-QAM	0.039	15.91
LTE – Band66/4 (20)	1720.0 – 1770.0	18M0G7D	QPSK	0.124	20.95
		17M9W7D	16-QAM	0.104	20.16
		17M9W7D	64-QAM	0.080	19.04
		18M0W7D	256-QAM	0.040	16.01

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Tablet with GSM/GPRS/EGPRS/UMTS and LTE, Sub 6.
It also supports IEEE 802.11 a/b/g/n/ac (20/40/80 MHz), Bluetooth, BT LE, NFC

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Radiated Power	- ANSI C63.26-2015 – Section 5.2.4.4 - KDB 971168 D01 v03r01 – Section 5.8
Radiated Spurious and Harmonic Emissions	- ANSI C63.26-2015 – Section 5.5.3 - KDB 971168 D01 v03r01 – Section 5.8

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq$ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq$ 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $>$ 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser
if no specific emissions from the EUT are recorded (ie: margin $>$ 20 dB from the applicable limit)
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets,
and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.
The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

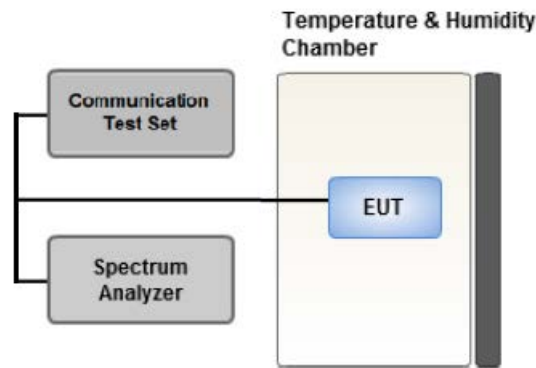

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to “free run.”
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

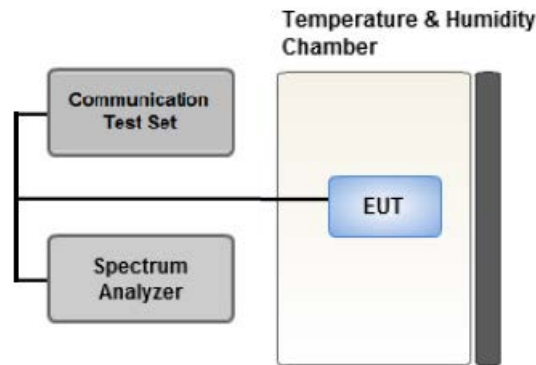

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.


The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq$ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

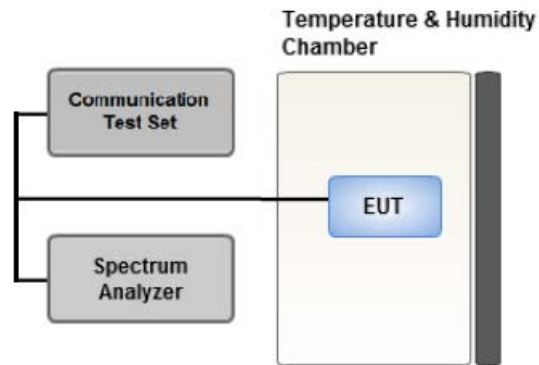

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep $\geq 2 \times \text{Span} / \text{RBW}$

3.7 BAND EDGE

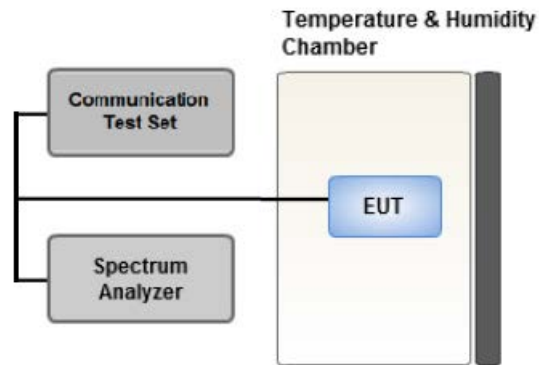

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where $\text{Margin} < 1 \text{ dB}$ the emission level is either corrected by $10 \log(1 \text{ MHz/ RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

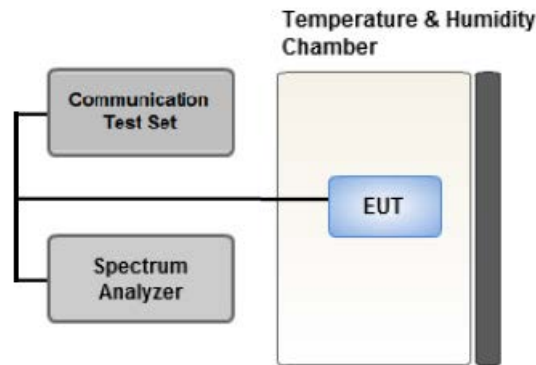

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter.
Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
Worst case : Stand alone
- All simultaneous transmission scenarios of operation were investigated, and the test results showed no additional significant emissions relative to the least restrictive limit were observed.
Therefore, only the worst case(stand-alone) results were reported.
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 10 MHz(Main 1 ANT), 1.4 MHz(Sub 1 ANT))
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.
- LTE Band 66 (1710 – 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz) and they have the same Tune-up power. Therefore, test data provided in this report covers Band 4 as well as Band 66.

[Main 1 ANT Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		X
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.2		X

[Sub 1 ANT Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 9.1		Z
Radiated Spurious and Harmonic Emissions	QPSK	See Section 9.2		Y

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- LTE Band 66 (1710 – 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz) and they have the same Tune-up power. Therefore, test data provided in this report covers Band 4 as well as Band 66.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	Switch box(1.2 G HPF+LNA)	HCT CO., LTD.,	F1L1	11/11/2025	Annual
RF Switching System	Switch box(3.3 G HPF+LNA)	HCT CO., LTD.,	F1L2	11/11/2025	Annual
RF Switching System	Switch box(LNA)	HCT CO., LTD.,	F1L4	11/11/2025	Annual
RF Switching System	Switch box(6 G HPF+LNA)	HCT CO., LTD.,	F1L7	11/11/2025	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/07/2025	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/26/2025	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/17/2025	Annual
DC Power Supply	E3632A	Agilent	MY40010147	08/06/2025	Annual
Dipole Antenna	UHAP	Schwarzbeck	01274	03/10/2026	Biennial
Dipole Antenna	UHAP	Schwarzbeck	01288	08/07/2026	Biennial
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/11/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/19/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/06/2025	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/28/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	08/19/2026	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	11/13/2025	Annual
Radio Communication Test Station	MT8000A	Anritsu Corp.	6272613402	08/28/2025	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/26/2025	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/17/2025	Annual
Signal & Spectrum Analyzer (2 Hz~67 GHz)	FSW67	REOHDE & SCHWARZ	101736	05/23/2025	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ kHz)
Occupied Bandwidth	95 (Confidence level about 95 %, $k=2$)
Frequency stability	28 (Confidence level about 95 %, $k=2$)

Parameter	Expanded Uncertainty ($\pm$ dB)
Block Edge	0.70 (Confidence level about 95 %, $k=2$)
Conducted Spurious Emissions	1.18 (Confidence level about 95 %, $k=2$)
Peak- to- Average Ratio	0.68 (Confidence level about 95 %, $k=2$)
Radiated Power	4.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 27.53(h)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§ 27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§ 2.1055, § 27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§ 27.50(d)(4)	< 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 27.53(h)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW
GSM BW = 249 kHz
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W
GSM BW = 249 kHz
G = Phase Modulation
7 = Quantized/Digital Info
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W
WCDMA BW = 4.17 MHz
F = Frequency Modulation
9 = Composite Digital Info
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D
LTE BW = 4.48 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D
LTE BW = 4.48 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission; telemetry; telecommand

8. TEST DATA(Main 1 ANT)

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1710.7	LTE B66/B4 (1.4 MHz)	QPSK	-16.14	17.23	10.04	2.06	H	<2.00	0.332	25.21	1	5
		16-QAM	-16.85	16.52	10.04	2.06	H		0.282	24.50		
		64-QAM	-17.97	15.40	10.04	2.06	H		0.218	23.38		
		256-QAM	-21.10	12.27	10.04	2.06	H		0.106	20.25		
1745		QPSK	-15.92	17.54	10.18	2.07	H		0.367	25.65	1	0
		16-QAM	-16.59	16.87	10.18	2.07	H		0.315	24.98		
		64-QAM	-17.72	15.74	10.18	2.07	H		0.243	23.85		
		256-QAM	-20.85	12.61	10.18	2.07	H		0.118	20.72		
1779.3		QPSK	-17.43	16.39	10.26	2.09	H		0.286	24.56	1	0
		16-QAM	-18.22	15.60	10.26	2.09	H		0.238	23.77		
		64-QAM	-19.34	14.48	10.26	2.09	H		0.184	22.65		
		256-QAM	-22.49	11.33	10.26	2.09	H		0.089	19.50		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1711.5	LTE B66/B4 (3 MHz)	QPSK	-16.07	17.30	10.04	2.06	H	<2.00	0.337	25.28	1	14
		16-QAM	-16.75	16.62	10.04	2.06	H		0.288	24.60		
		64-QAM	-17.88	15.49	10.04	2.06	H		0.222	23.47		
		256-QAM	-21.06	12.31	10.04	2.06	H		0.107	20.29		
1745		QPSK	-15.87	17.59	10.18	2.07	H		0.372	25.70	1	0
		16-QAM	-16.53	16.93	10.18	2.07	H		0.319	25.04		
		64-QAM	-17.64	15.82	10.18	2.07	H		0.247	23.93		
		256-QAM	-20.76	12.70	10.18	2.07	H		0.121	20.81		
1778.5		QPSK	-17.37	16.45	10.26	2.09	H		0.290	24.62	1	0
		16-QAM	-18.07	15.75	10.26	2.09	H		0.247	23.92		
		64-QAM	-19.20	14.62	10.26	2.09	H		0.190	22.79		
		256-QAM	-22.34	11.48	10.26	2.09	H		0.092	19.65		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1712.5	LTE B66/B4 (5 MHz)	QPSK	-16.01	17.38	10.06	2.06	H	<2.00	0.345	25.38	1	24
		16-QAM	-16.75	16.64	10.06	2.06	H		0.291	24.64		
		64-QAM	-17.87	15.52	10.06	2.06	H		0.225	23.52		
		256-QAM	-20.98	12.41	10.06	2.06	H		0.110	20.41		
1745		QPSK	-15.72	17.74	10.18	2.07	H		0.385	25.85	1	0
		16-QAM	-16.44	17.02	10.18	2.07	H		0.326	25.13		
		64-QAM	-17.56	15.90	10.18	2.07	H		0.252	24.01		
		256-QAM	-20.72	12.74	10.18	2.07	H		0.122	20.85		
1777.5		QPSK	-17.18	16.64	10.26	2.09	H		0.303	24.81	1	0
		16-QAM	-17.99	15.83	10.26	2.09	H		0.251	24.00		
		64-QAM	-19.15	14.67	10.26	2.09	H		0.192	22.84		
		256-QAM	-22.27	11.55	10.26	2.09	H		0.094	19.72		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1715	LTE B66/B4 (10 MHz)	QPSK	-15.95	17.44	10.06	2.06	H	<2.00	0.350	25.44	1	49
		16-QAM	-16.76	16.63	10.06	2.06	H		0.290	24.63		
		64-QAM	-17.86	15.53	10.06	2.06	H		0.225	23.53		
		256-QAM	-20.94	12.45	10.06	2.06	H		0.111	20.45		
1745		QPSK	-15.67	17.79	10.18	2.07	H		0.389	25.90	1	0
		16-QAM	-16.45	17.01	10.18	2.07	H		0.325	25.12		
		64-QAM	-17.57	15.89	10.18	2.07	H		0.251	24.00		
		256-QAM	-20.61	12.85	10.18	2.07	H		0.125	20.96		
1775		QPSK	-16.99	16.77	10.25	2.09	H		0.311	24.93	1	0
		16-QAM	-17.80	15.96	10.25	2.09	H		0.258	24.12		
		64-QAM	-18.90	14.86	10.25	2.09	H		0.200	23.02		
		256-QAM	-21.94	11.82	10.25	2.09	H		0.100	19.98		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1717.5	LTE B66/B4 (15 MHz)	QPSK	-15.87	17.55	10.08	2.06	H	<2.00	0.361	25.57	1	74
		16-QAM	-16.67	16.75	10.08	2.06	H		0.300	24.77		
		64-QAM	-17.79	15.63	10.08	2.06	H		0.232	23.65		
		256-QAM	-20.86	12.56	10.08	2.06	H		0.114	20.58		
1745		QPSK	-15.68	17.78	10.18	2.07	H		0.388	25.89	1	0
		16-QAM	-16.42	17.04	10.18	2.07	H		0.327	25.15		
		64-QAM	-17.55	15.91	10.18	2.07	H		0.252	24.02		
		256-QAM	-20.65	12.81	10.18	2.07	H		0.124	20.92		
1772.5		QPSK	-16.77	16.99	10.25	2.09	H		0.327	25.15	1	0
		16-QAM	-17.54	16.22	10.25	2.09	H		0.274	24.38		
		64-QAM	-18.66	15.10	10.25	2.09	H		0.212	23.26		
		256-QAM	-21.79	11.97	10.25	2.09	H		0.103	20.13		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1720	LTE B66/B4 (20 MHz)	QPSK	-15.77	17.65	10.08	2.06	H	<2.00	0.369	25.67	1	99
		16-QAM	-16.53	16.89	10.08	2.06	H		0.310	24.91		
		64-QAM	-17.67	15.75	10.08	2.06	H		0.238	23.77		
		256-QAM	-20.77	12.65	10.08	2.06	H		0.117	20.67		
1745		QPSK	-15.76	17.70	10.18	2.07	H		0.381	25.81	1	0
		16-QAM	-16.53	16.93	10.18	2.07	H		0.319	25.04		
		64-QAM	-17.65	15.81	10.18	2.07	H		0.247	23.92		
		256-QAM	-20.71	12.75	10.18	2.07	H		0.122	20.86		
1770		QPSK	-16.62	17.08	10.24	2.09	H		0.333	25.23	1	0
		16-QAM	-17.42	16.28	10.24	2.09	H		0.277	24.43		
		64-QAM	-18.54	15.16	10.24	2.09	H		0.214	23.31		
		256-QAM	-21.60	12.10	10.24	2.09	H		0.106	20.25		

8.2 RADIATED SPURIOUS EMISSIONS

■ MODE: LTE B66(4)
 ■ MODULATION SIGNAL: 10 MHz QPSK
 ■ DISTANCE: 3 meters
 ■ LIMIT: -13 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	RB	
								Size	Offset
132022 (1715)	3430.00	-43.98	12.42	-62.81	3.01	H	-53.40	1	49
	5145.00	-44.87	12.37	-57.56	3.78	H	-48.97		
	6860.00	-46.07	11.87	-53.02	4.39	H	-45.54		
132322 (1745)	3490.00	-44.58	12.34	-62.83	3.04	H	-53.53	1	0
	5235.00	-45.04	12.84	-57.62	3.78	H	-48.56		
	6980.00	-44.94	11.40	-51.26	4.48	H	-44.34		
132622 (1775)	3550.00	-44.18	12.34	-61.83	3.09	H	-52.58	1	0
	5325.00	-43.81	13.08	-57.33	3.78	H	-48.03		
	7100.00	-44.85	10.88	-49.14	4.48	H	-42.74		

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
66/4	1.4 MHz	1745.0	QPSK	6	0	5.36
			16-QAM			6.16
			64-QAM			6.28
			256-QAM			6.27
	3 MHz		QPSK	15		5.57
			16-QAM			6.19
			64-QAM			6.36
			256-QAM			6.36
	5 MHz		QPSK	25		5.47
			16-QAM			6.17
			64-QAM			6.33
			256-QAM			6.38
	10 MHz		QPSK	50		5.55
			16-QAM			6.17
			64-QAM			6.32
			256-QAM			6.38
	15 MHz		QPSK	75		5.45
			16-QAM			6.08
			64-QAM			6.29
			256-QAM			6.33
	20 MHz		QPSK	100		5.44
			16-QAM			6.11
			64-QAM			6.29
			256-QAM			6.38

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 77 ~ 100.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
66/4	1.4 MHz	1745.0	QPSK	6	0	1.0968
			16-QAM			1.0931
			64-QAM			1.0935
			256-QAM			1.0944
	3 MHz		QPSK	15		2.7112
			16-QAM			2.6997
			64-QAM			2.7009
			256-QAM			2.7091
	5 MHz		QPSK	25		4.5224
			16-QAM			4.5052
			64-QAM			4.5210
			256-QAM			4.5465
	10 MHz		QPSK	50		8.9972
			16-QAM			9.0134
			64-QAM			9.0083
			256-QAM			9.0321
	15 MHz		QPSK	75		13.484
			16-QAM			13.485
			64-QAM			13.497
			256-QAM			13.439
	20 MHz		QPSK	100		17.998
			16-QAM			17.935
			64-QAM			17.929
			256-QAM			17.972

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 101 ~ 124.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
66/4	1.4	1710.70	8.5045	28.5910	-66.352	-37.761	-13.00
		1745.00	4.8854	27.9760	-65.706	-37.730	
		1779.30	8.7936	28.5910	-66.314	-37.723	
	3	1711.50	7.7667	28.5910	-65.381	-36.790	
		1745.00	3.7887	27.9760	-64.623	-36.647	
		1778.50	9.4118	28.5910	-64.015	-35.424	
	5	1712.50	4.0978	27.9760	-65.246	-37.270	
		1745.00	3.8186	27.9760	-66.099	-38.123	
		1777.50	9.0828	28.5910	-65.044	-36.453	
	10	1715.00	7.6271	28.5910	-65.733	-37.142	
		1745.00	6.0619	28.5910	-65.801	-37.210	
		1775.00	6.8993	28.5910	-66.109	-37.518	
	15	1717.50	1.6850	27.9760	-61.562	-33.586	
		1745.00	7.1486	28.5910	-65.813	-37.222	
		1772.50	3.7688	27.9760	-65.261	-37.285	
	20	1720.00	9.9502	28.5910	-65.790	-37.199	
		1745.00	5.1546	28.5910	-65.322	-36.731	
		1770.00	9.9202	28.5910	-65.087	-36.496	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 125 ~ 160.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 161 ~ 196.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


MODE:	<u>LTE 66/4</u>
OPERATING FREQUENCY:	<u>1710,700,000 Hz</u>
CHANNEL:	<u>131979 (1.4 MHz)</u>
REFERENCE VOLTAGE:	<u>3.860 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1710 700 005	0.0	0.000 000	0.000
100 %		-30	1710 700 009	3.9	0.000 000	0.002
100 %		-20	1710 700 009	4.0	0.000 000	0.002
100 %		-10	1710 700 003	-2.5	0.000 000	-0.001
100 %		0	1710 700 010	4.6	0.000 000	0.003
100 %		+10	1710 700 010	4.6	0.000 000	0.003
100 %		+30	1710 700 009	4.4	0.000 000	0.003
100 %		+40	1710 700 002	-3.3	0.000 000	-0.002
100 %		+50	1710 700 009	3.9	0.000 000	0.002
Batt. Endpoint	3.400	+20	1710 700 002	-3.5	0.000 000	-0.002

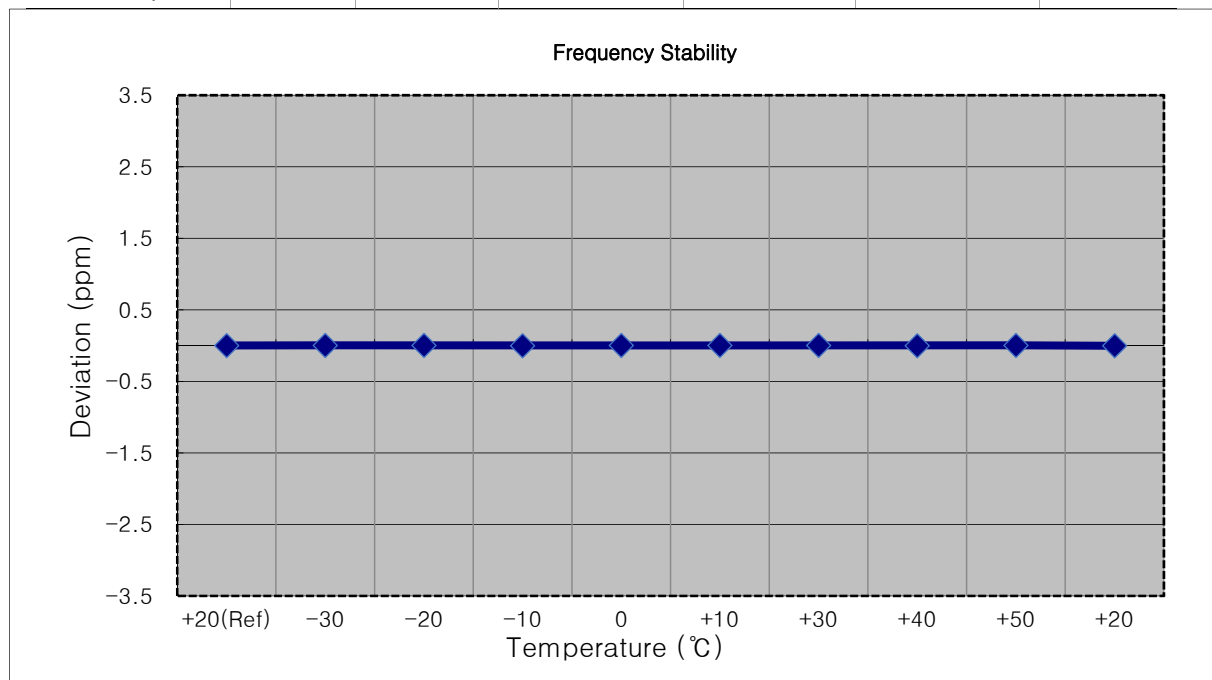


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1711,500,000 Hz
- ▣ CHANNEL: 131987 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1711 500 007	0.0	0.000 000	0.000
100 %		-30	1711 500 001	-5.5	0.000 000	-0.003
100 %		-20	1711 500 001	-5.4	0.000 000	-0.003
100 %		-10	1711 500 011	4.4	0.000 000	0.003
100 %		0	1711 500 010	3.4	0.000 000	0.002
100 %		+10	1711 500 011	4.5	0.000 000	0.003
100 %		+30	1711 500 011	3.9	0.000 000	0.002
100 %		+40	1711 500 011	4.3	0.000 000	0.003
100 %		+50	1711 500 014	6.8	0.000 000	0.004
Batt. Endpoint	3.400	+20	1711 500 010	3.2	0.000 000	0.002

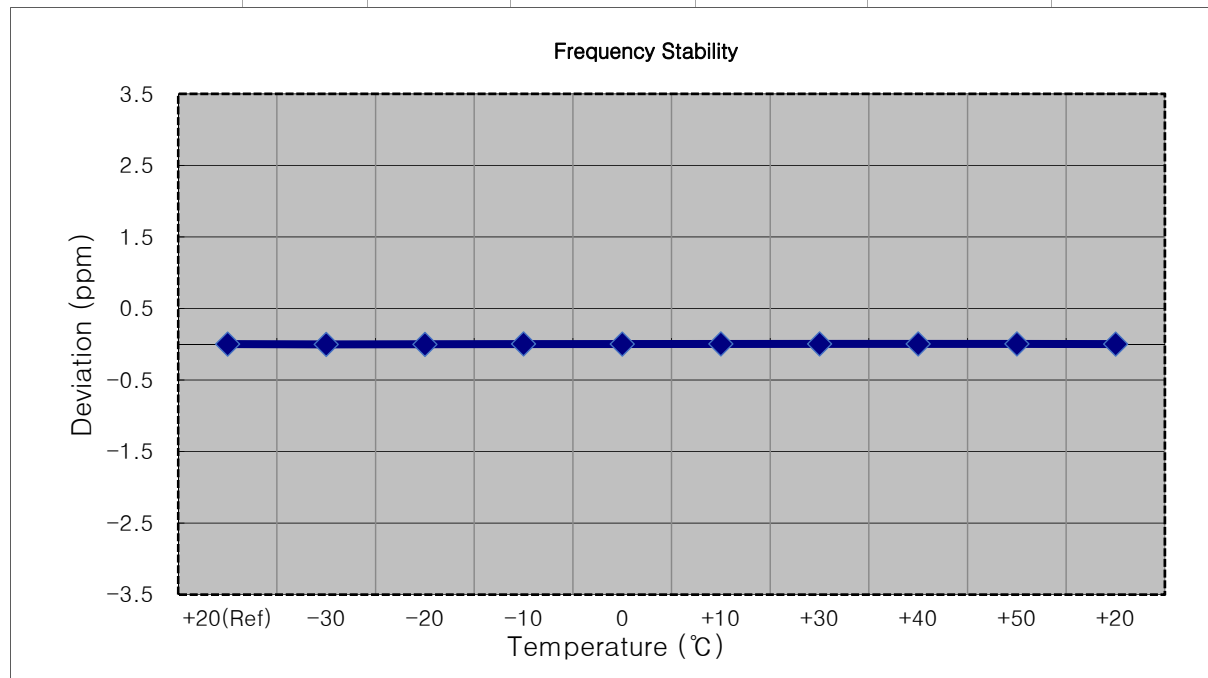


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1712,500,000 Hz
- ▣ CHANNEL: 131997 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1712 499 997	0.0	0.000 000	0.000
100 %		-30	1712 499 994	-3.6	0.000 000	-0.002
100 %		-20	1712 500 002	5.2	0.000 000	0.003
100 %		-10	1712 500 000	2.7	0.000 000	0.002
100 %		0	1712 500 001	4.0	0.000 000	0.002
100 %		+10	1712 499 994	-3.0	0.000 000	-0.002
100 %		+30	1712 499 993	-3.8	0.000 000	-0.002
100 %		+40	1712 500 001	3.9	0.000 000	0.002
100 %		+50	1712 499 994	-3.2	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1712 499 994	-3.2	0.000 000	-0.002

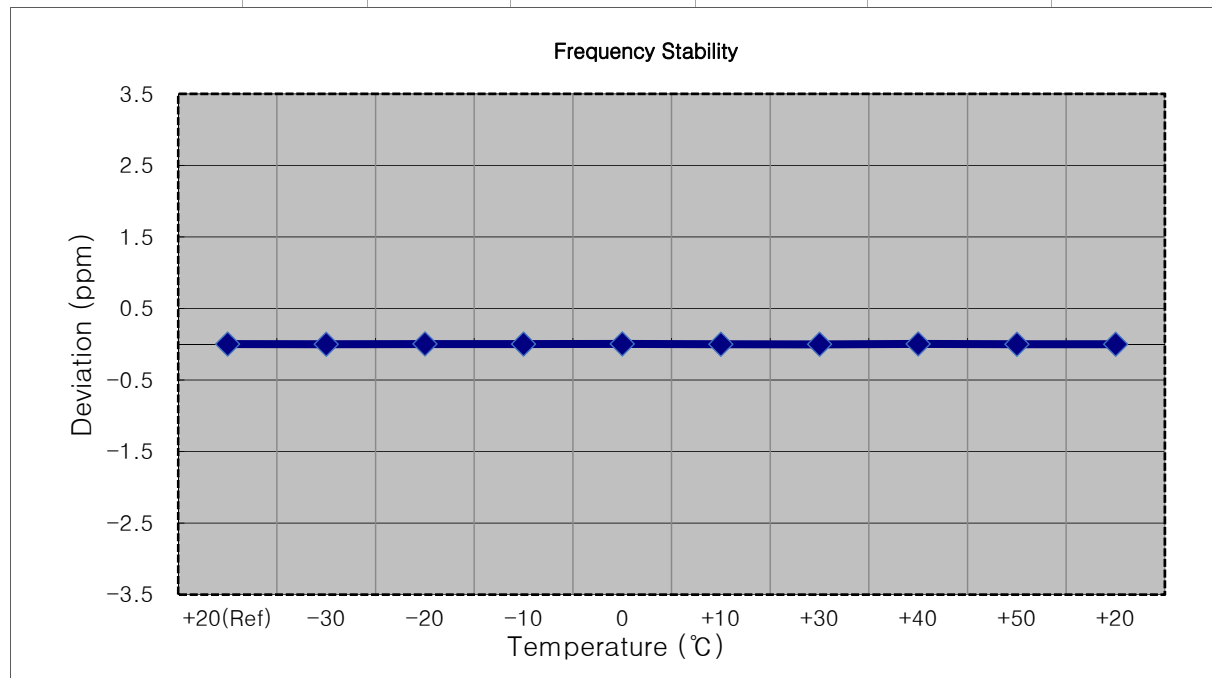


MODE:	<u>LTE 66/4</u>
OPERATING FREQUENCY:	<u>1715,000,000 Hz</u>
CHANNEL:	<u>132022 (10 MHz)</u>
REFERENCE VOLTAGE:	<u>3.860 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1714 999 995	0.0	0.000 000	0.000
100 %		-30	1715 000 002	6.6	0.000 000	0.004
100 %		-20	1715 000 000	4.9	0.000 000	0.003
100 %		-10	1714 999 999	3.9	0.000 000	0.002
100 %		0	1714 999 991	-4.8	0.000 000	-0.003
100 %		+10	1714 999 999	3.8	0.000 000	0.002
100 %		+30	1714 999 992	-3.6	0.000 000	-0.002
100 %		+40	1715 000 001	6.0	0.000 000	0.003
100 %		+50	1715 000 001	6.0	0.000 000	0.003
Batt. Endpoint	3.400	+20	1715 000 000	4.3	0.000 000	0.003

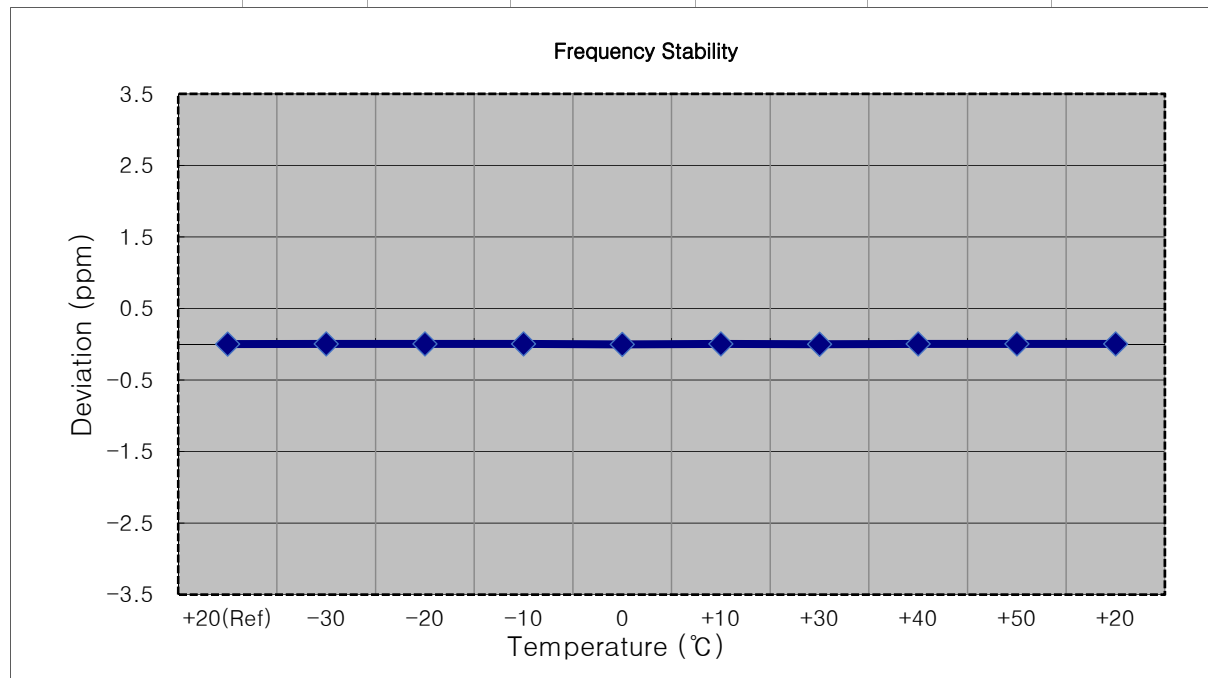


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1717,500,000 Hz
- ▣ CHANNEL: 132047 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1717 500 004	0.0	0.000 000	0.000
100 %		-30	1717 500 009	4.7	0.000 000	0.003
100 %		-20	1717 499 999	-4.7	0.000 000	-0.003
100 %		-10	1717 500 008	4.2	0.000 000	0.002
100 %		0	1717 500 001	-3.6	0.000 000	-0.002
100 %		+10	1717 500 009	5.2	0.000 000	0.003
100 %		+30	1717 500 008	4.3	0.000 000	0.003
100 %		+40	1717 500 008	3.4	0.000 000	0.002
100 %		+50	1717 500 009	5.0	0.000 000	0.003
Batt. Endpoint	3.400	+20	1717 500 008	4.0	0.000 000	0.002

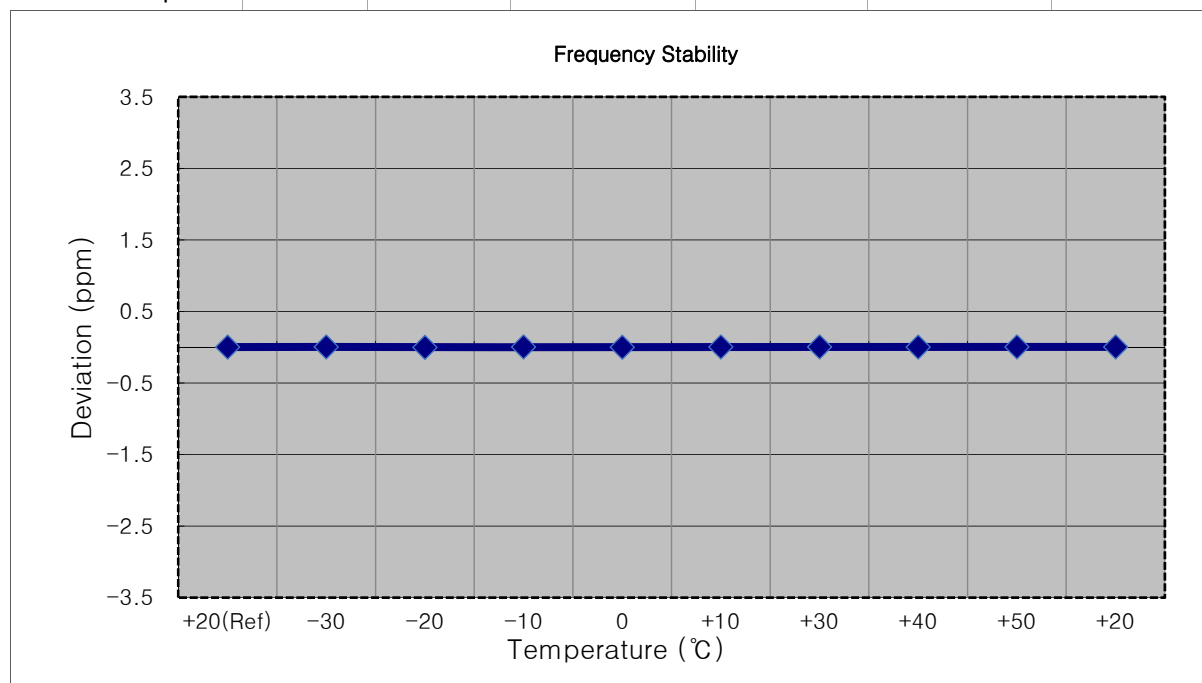


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1720,000,000 Hz
- ▣ CHANNEL: 132072 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1719 999 996	0.0	0.000 000	0.000
100 %		-30	1720 000 000	4.1	0.000 000	0.002
100 %		-20	1720 000 000	4.1	0.000 000	0.002
100 %		-10	1719 999 998	2.8	0.000 000	0.002
100 %		0	1719 999 991	-4.3	0.000 000	-0.003
100 %		+10	1720 000 001	5.8	0.000 000	0.003
100 %		+30	1719 999 992	-4.0	0.000 000	-0.002
100 %		+40	1720 000 000	4.3	0.000 000	0.003
100 %		+50	1720 000 001	5.9	0.000 000	0.003
Batt. Endpoint	3.400	+20	1719 999 991	-4.5	0.000 000	-0.003

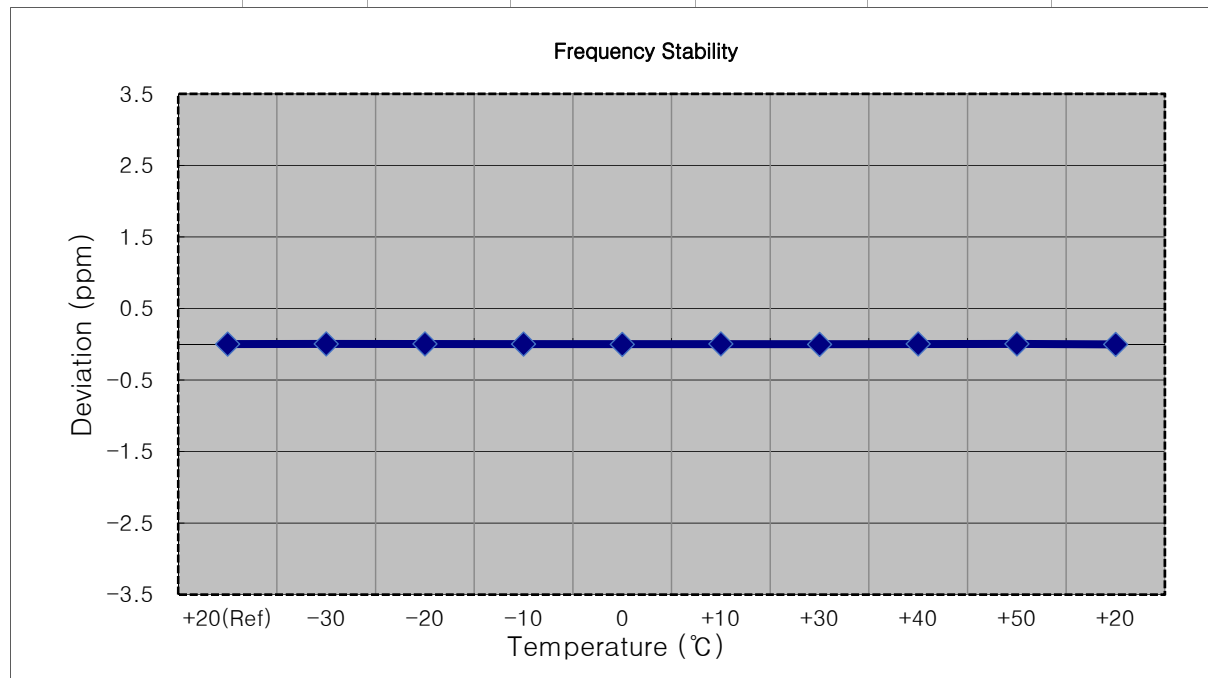


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1744 999 996	0.0	0.000 000	0.000
100 %		-30	1745 000 002	6.3	0.000 000	0.004
100 %		-20	1744 999 991	-5.2	0.000 000	-0.003
100 %		-10	1745 000 000	4.3	0.000 000	0.002
100 %		0	1744 999 992	-3.9	0.000 000	-0.002
100 %		+10	1745 000 000	4.1	0.000 000	0.002
100 %		+30	1745 000 002	5.8	0.000 000	0.003
100 %		+40	1745 000 000	3.9	0.000 000	0.002
100 %		+50	1744 999 991	-4.7	0.000 000	-0.003
Batt. Endpoint	3.400	+20	1745 000 002	6.5	0.000 000	0.004

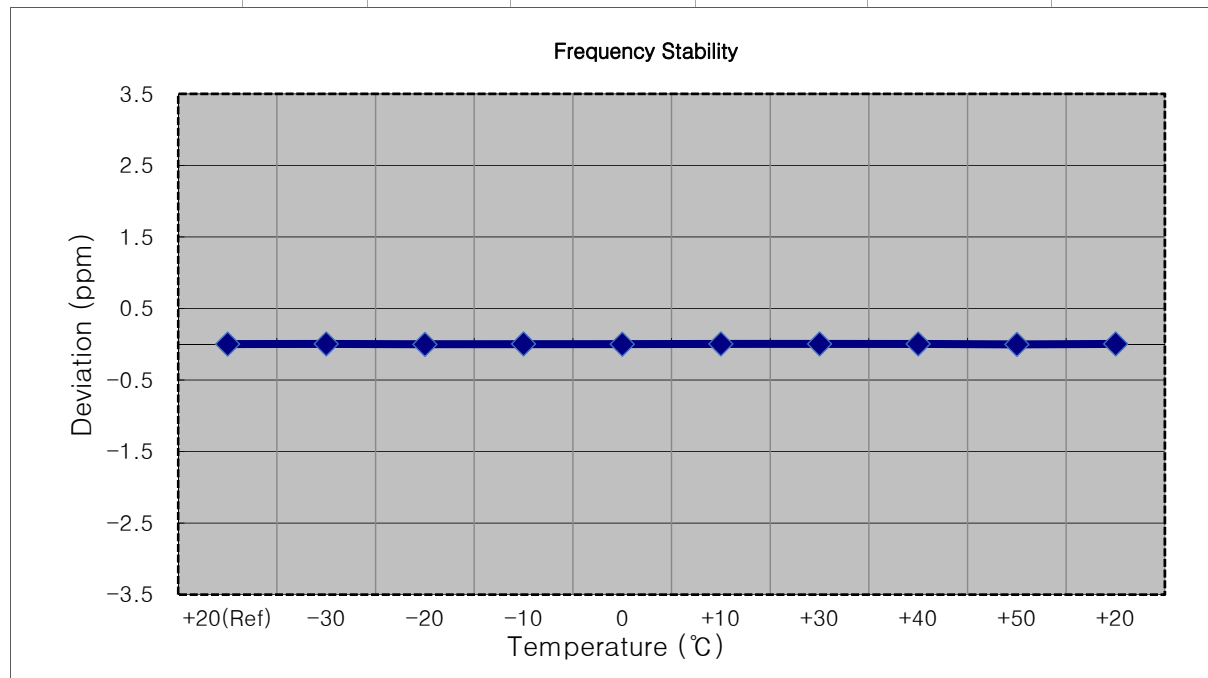


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 007	0.0	0.000 000	0.000
100 %		-30	1745 000 014	6.8	0.000 000	0.004
100 %		-20	1745 000 002	-5.0	0.000 000	-0.003
100 %		-10	1745 000 013	6.2	0.000 000	0.004
100 %		0	1744 999 999	-8.4	0.000 000	-0.005
100 %		+10	1745 000 002	-5.5	0.000 000	-0.003
100 %		+30	1745 000 014	6.3	0.000 000	0.004
100 %		+40	1745 000 013	5.8	0.000 000	0.003
100 %		+50	1745 000 001	-5.9	0.000 000	-0.003
Batt. Endpoint	3.400	+20	1745 000 012	5.1	0.000 000	0.003

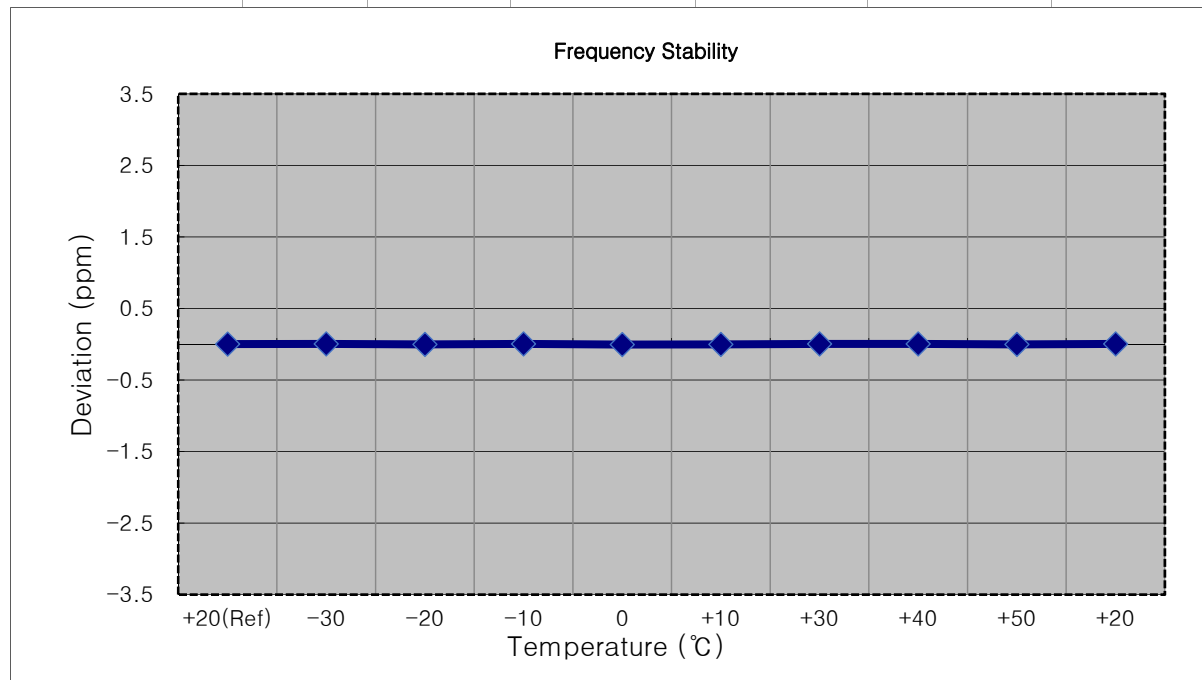


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 006	0.0	0.000 000	0.000
100 %		-30	1745 000 011	4.8	0.000 000	0.003
100 %		-20	1745 000 001	-5.3	0.000 000	-0.003
100 %		-10	1745 000 003	-3.5	0.000 000	-0.002
100 %		0	1745 000 011	5.1	0.000 000	0.003
100 %		+10	1745 000 010	4.0	0.000 000	0.002
100 %		+30	1745 000 011	4.5	0.000 000	0.003
100 %		+40	1745 000 012	5.9	0.000 000	0.003
100 %		+50	1745 000 000	-6.4	0.000 000	-0.004
Batt. Endpoint	3.400	+20	1745 000 012	5.7	0.000 000	0.003

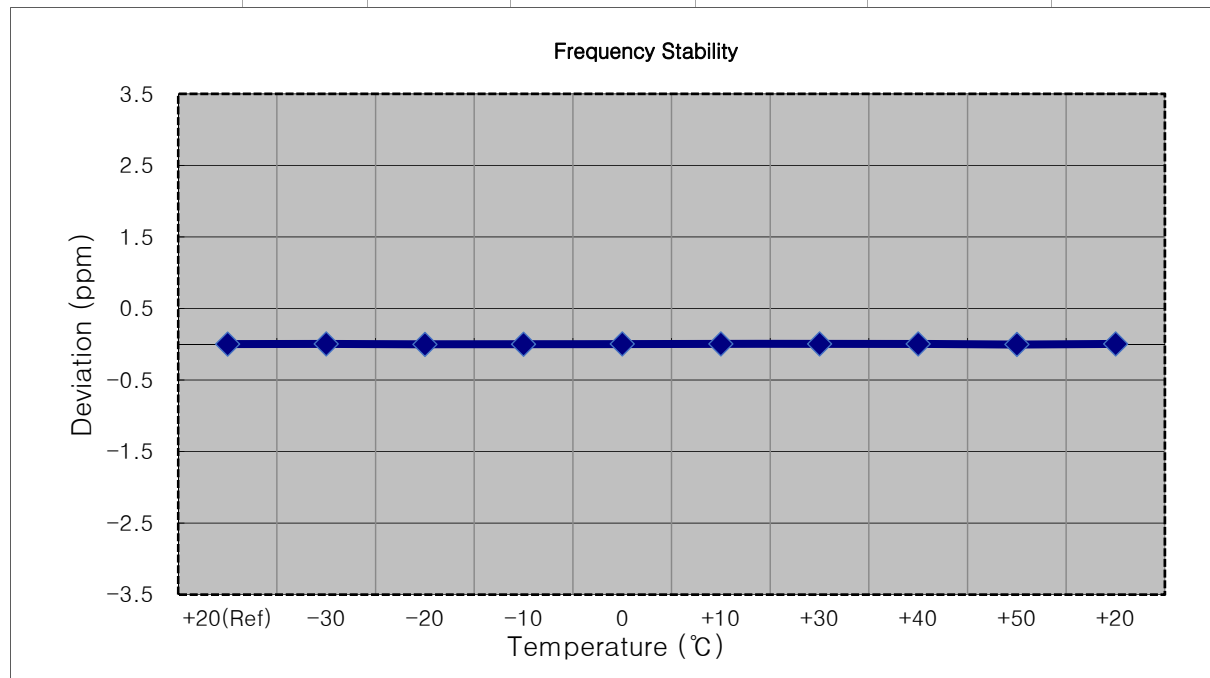


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 005	0.0	0.000 000	0.000
100 %		-30	1744 999 999	-6.6	0.000 000	-0.004
100 %		-20	1745 000 011	5.4	0.000 000	0.003
100 %		-10	1745 000 000	-5.1	0.000 000	-0.003
100 %		0	1745 000 010	4.9	0.000 000	0.003
100 %		+10	1745 000 011	5.5	0.000 000	0.003
100 %		+30	1744 999 999	-6.1	0.000 000	-0.003
100 %		+40	1745 000 010	4.7	0.000 000	0.003
100 %		+50	1745 000 001	-4.2	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1745 000 000	-5.5	0.000 000	-0.003

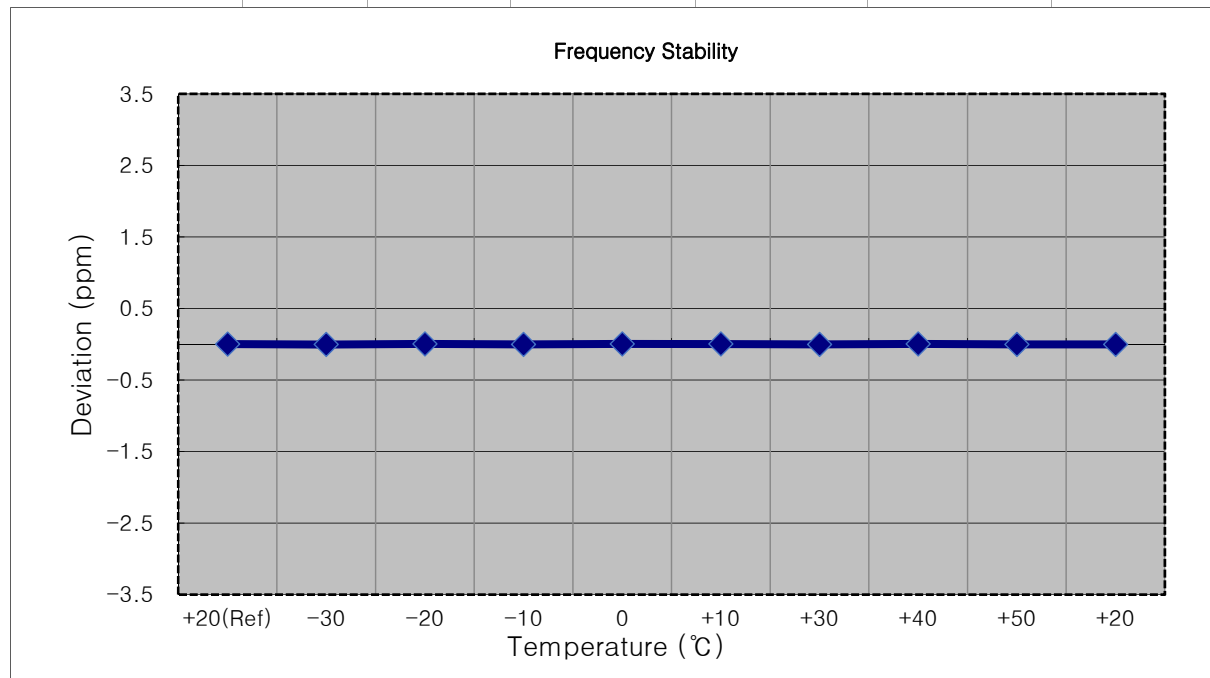


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 005	0.0	0.000 000	0.000
100 %		-30	1745 000 010	5.0	0.000 000	0.003
100 %		-20	1745 000 010	5.0	0.000 000	0.003
100 %		-10	1744 999 998	-6.8	0.000 000	-0.004
100 %		0	1745 000 000	-5.5	0.000 000	-0.003
100 %		+10	1745 000 010	5.0	0.000 000	0.003
100 %		+30	1745 000 000	-5.3	0.000 000	-0.003
100 %		+40	1745 000 010	4.6	0.000 000	0.003
100 %		+50	1745 000 012	6.5	0.000 000	0.004
Batt. Endpoint	3.400	+20	1744 999 999	-6.0	0.000 000	-0.003

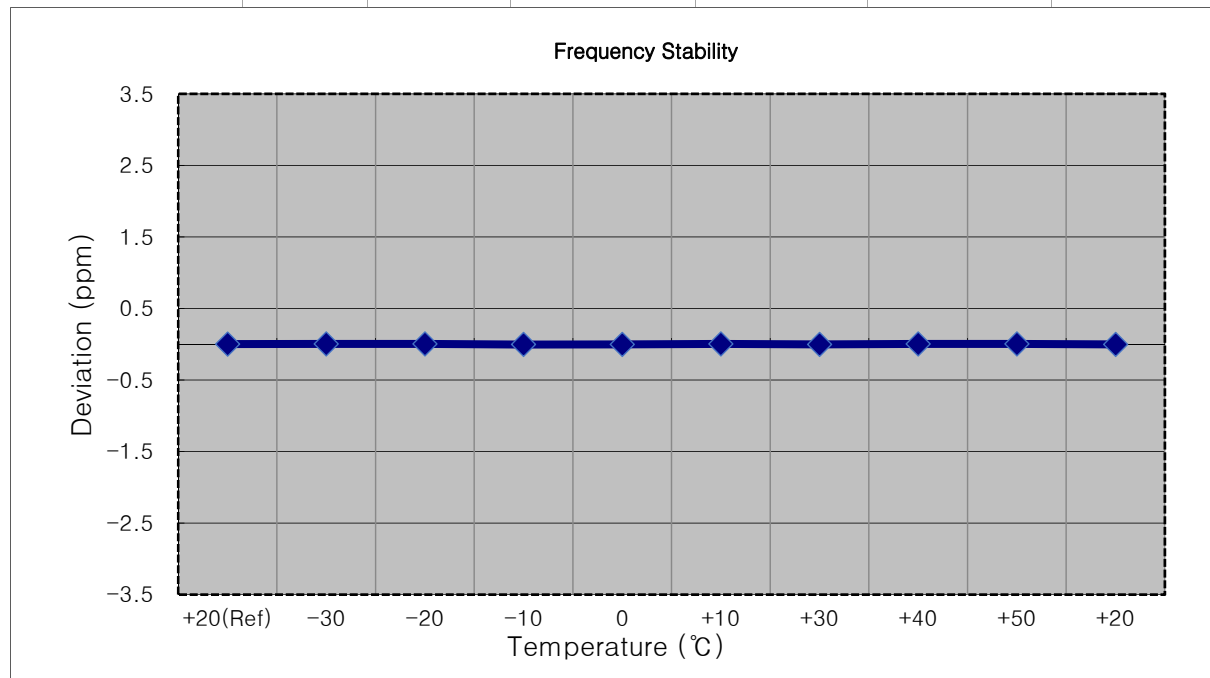


MODE:	<u>LTE 66/4</u>
OPERATING FREQUENCY:	<u>1745,000,000 Hz</u>
CHANNEL:	<u>132322 (20 MHz)</u>
REFERENCE VOLTAGE:	<u>3.860 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 006	0.0	0.000 000	0.000
100 %		-30	1745 000 012	6.1	0.000 000	0.003
100 %		-20	1745 000 012	5.9	0.000 000	0.003
100 %		-10	1745 000 000	-5.5	0.000 000	-0.003
100 %		0	1745 000 001	-5.0	0.000 000	-0.003
100 %		+10	1745 000 001	-4.2	0.000 000	-0.002
100 %		+30	1745 000 012	6.2	0.000 000	0.004
100 %		+40	1745 000 011	4.9	0.000 000	0.003
100 %		+50	1745 000 000	-6.1	0.000 000	-0.003
Batt. Endpoint	3.400	+20	1745 000 001	-5.1	0.000 000	-0.003

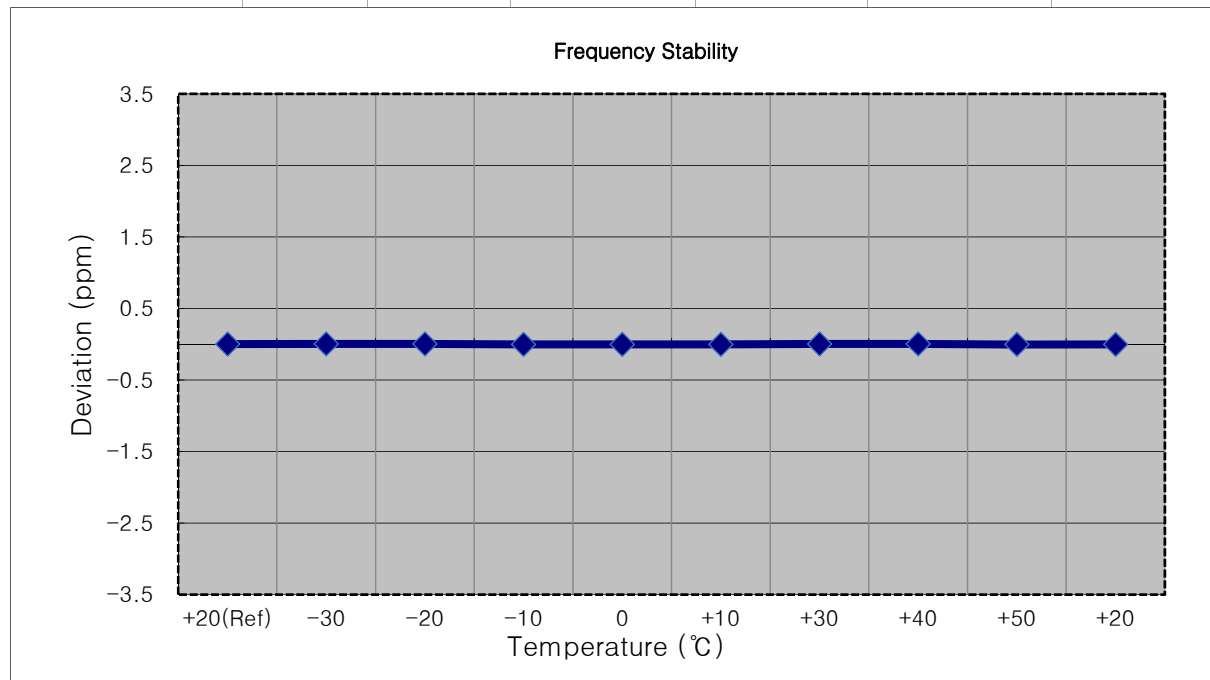


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1779,300,000 Hz
- ▣ CHANNEL: 132665 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1779 299 994	0.0	0.000 000	0.000
100 %		-30	1779 300 000	6.1	0.000 000	0.003
100 %		-20	1779 299 987	-6.5	0.000 000	-0.004
100 %		-10	1779 299 999	5.7	0.000 000	0.003
100 %		0	1779 299 999	5.4	0.000 000	0.003
100 %		+10	1779 300 001	7.0	0.000 000	0.004
100 %		+30	1779 300 002	8.1	0.000 000	0.005
100 %		+40	1779 299 999	5.8	0.000 000	0.003
100 %		+50	1779 299 998	4.3	0.000 000	0.002
Batt. Endpoint	3.400	+20	1779 299 989	-4.3	0.000 000	-0.002

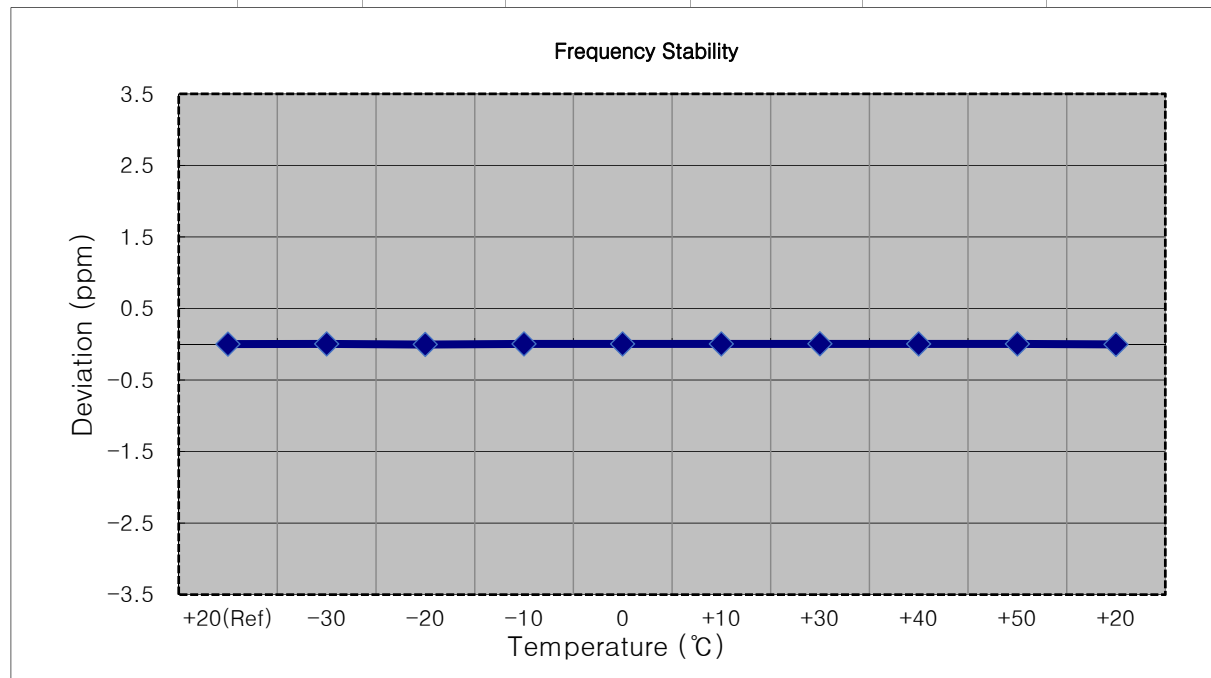


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1778,500,000 Hz
- ▣ CHANNEL: 132657 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1778 500 009	0.0	0.000 000	0.000
100 %		-30	1778 500 015	6.3	0.000 000	0.004
100 %		-20	1778 500 015	6.3	0.000 000	0.004
100 %		-10	1778 500 015	6.9	0.000 000	0.004
100 %		0	1778 500 003	-5.6	0.000 000	-0.003
100 %		+10	1778 500 016	7.8	0.000 000	0.004
100 %		+30	1778 500 016	7.1	0.000 000	0.004
100 %		+40	1778 500 017	8.8	0.000 000	0.005
100 %		+50	1778 500 015	6.9	0.000 000	0.004
Batt. Endpoint	3.400	+20	1778 500 014	5.9	0.000 000	0.003

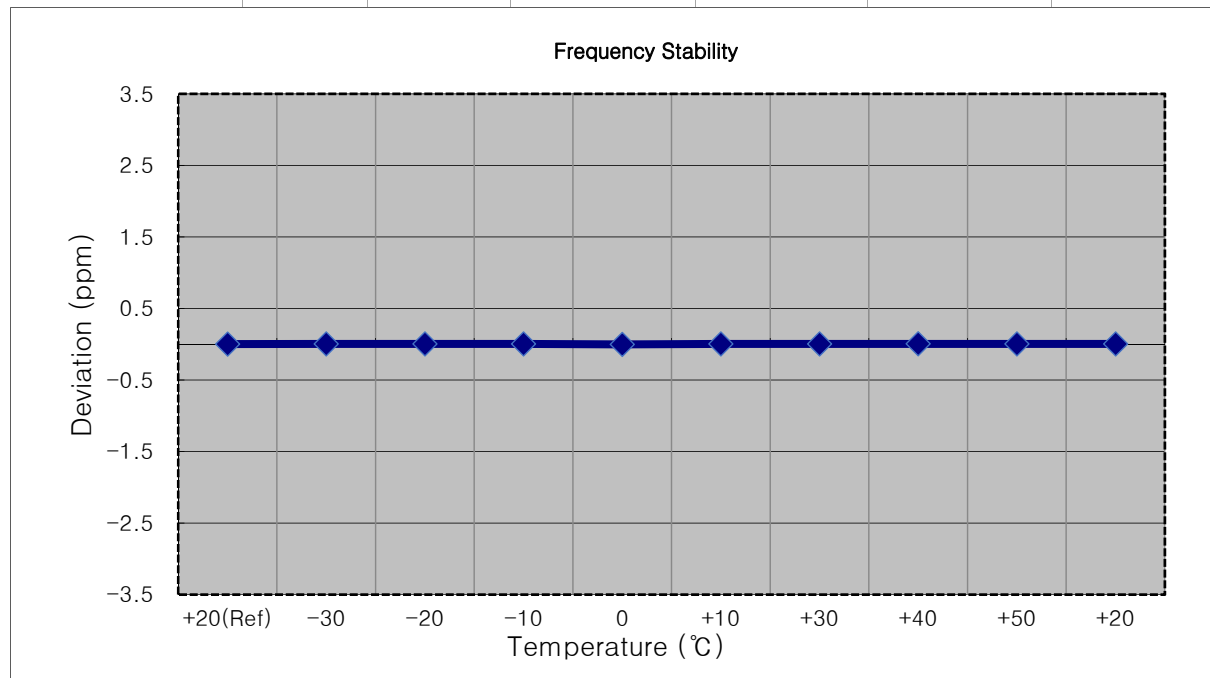


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1777,500,000 Hz
- ▣ CHANNEL: 132647 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1777 500 010	0.0	0.000 000	0.000
100 %		-30	1777 500 014	4.3	0.000 000	0.002
100 %		-20	1777 500 005	-4.5	0.000 000	-0.003
100 %		-10	1777 500 016	5.6	0.000 000	0.003
100 %		0	1777 500 017	6.8	0.000 000	0.004
100 %		+10	1777 500 005	-4.6	0.000 000	-0.003
100 %		+30	1777 500 006	-4.1	0.000 000	-0.002
100 %		+40	1777 500 015	5.5	0.000 000	0.003
100 %		+50	1777 500 007	-3.3	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1777 500 005	-5.2	0.000 000	-0.003

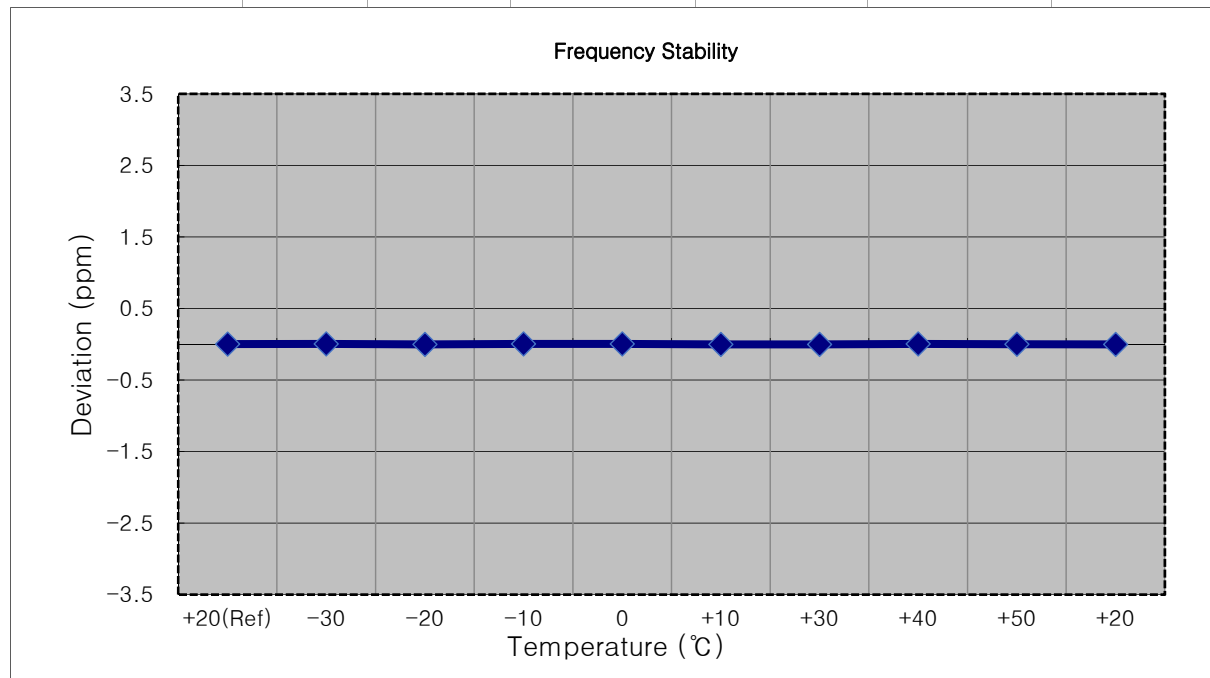


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1775,000,000 Hz
- ▣ CHANNEL: 132622 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1774 999 995	0.0	0.000 000	0.000
100 %		-30	1775 000 000	5.3	0.000 000	0.003
100 %		-20	1774 999 990	-4.7	0.000 000	-0.003
100 %		-10	1774 999 990	-4.5	0.000 000	-0.003
100 %		0	1774 999 989	-5.9	0.000 000	-0.003
100 %		+10	1774 999 990	-4.5	0.000 000	-0.003
100 %		+30	1774 999 991	-3.8	0.000 000	-0.002
100 %		+40	1774 999 999	4.6	0.000 000	0.003
100 %		+50	1774 999 989	-6.0	0.000 000	-0.003
Batt. Endpoint	3.400	+20	1774 999 991	-4.1	0.000 000	-0.002

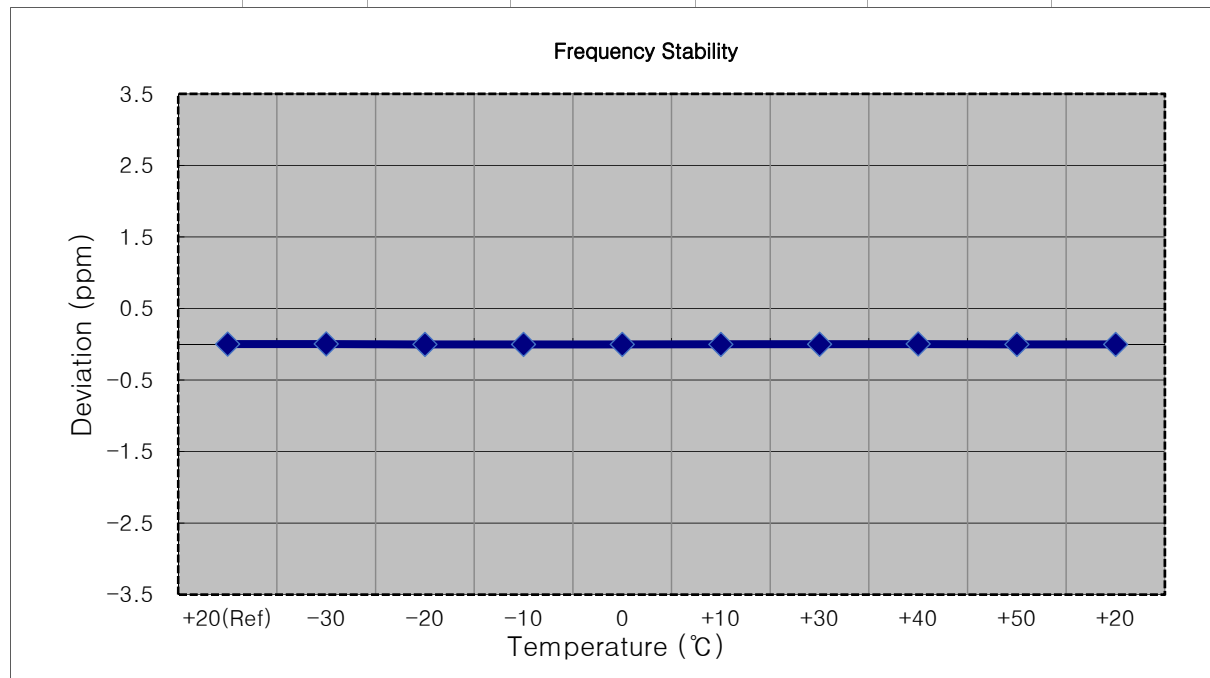


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1772,500,000 Hz
- ▣ CHANNEL: 132597 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1772 499 996	0.0	0.000 000	0.000
100 %		-30	1772 500 000	4.1	0.000 000	0.002
100 %		-20	1772 500 002	5.9	0.000 000	0.003
100 %		-10	1772 499 990	-6.0	0.000 000	-0.003
100 %		0	1772 499 999	2.8	0.000 000	0.002
100 %		+10	1772 500 002	6.4	0.000 000	0.004
100 %		+30	1772 500 002	6.4	0.000 000	0.004
100 %		+40	1772 500 000	3.8	0.000 000	0.002
100 %		+50	1772 500 002	6.5	0.000 000	0.004
Batt. Endpoint	3.400	+20	1772 499 993	-3.2	0.000 000	-0.002

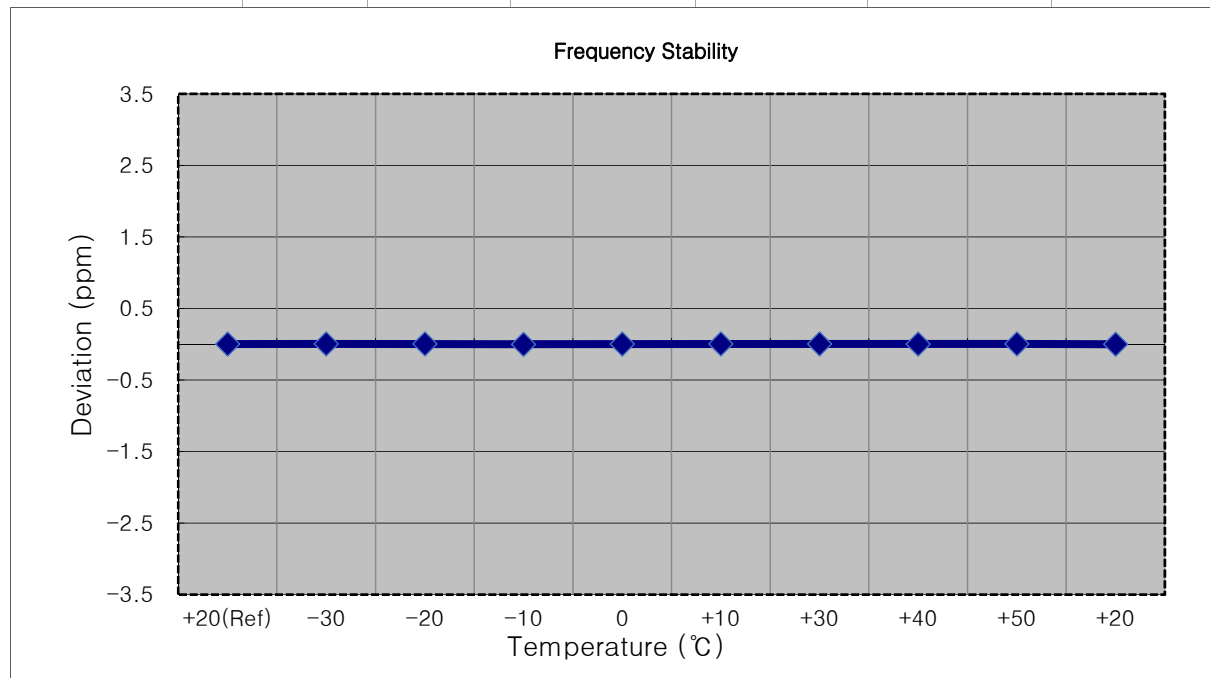

- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1770,000,000 Hz
- ▣ CHANNEL: 132572 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1770 000 005	0.0	0.000 000	0.000
100 %		-30	1770 000 011	5.7	0.000 000	0.003
100 %		-20	1770 000 011	6.0	0.000 000	0.003
100 %		-10	1770 000 000	-4.7	0.000 000	-0.003
100 %		0	1770 000 010	5.2	0.000 000	0.003
100 %		+10	1770 000 001	-4.3	0.000 000	-0.002
100 %		+30	1769 999 999	-6.4	0.000 000	-0.004
100 %		+40	1770 000 001	-4.1	0.000 000	-0.002
100 %		+50	1770 000 000	-4.6	0.000 000	-0.003
Batt. Endpoint	3.400	+20	1770 000 009	4.3	0.000 000	0.002

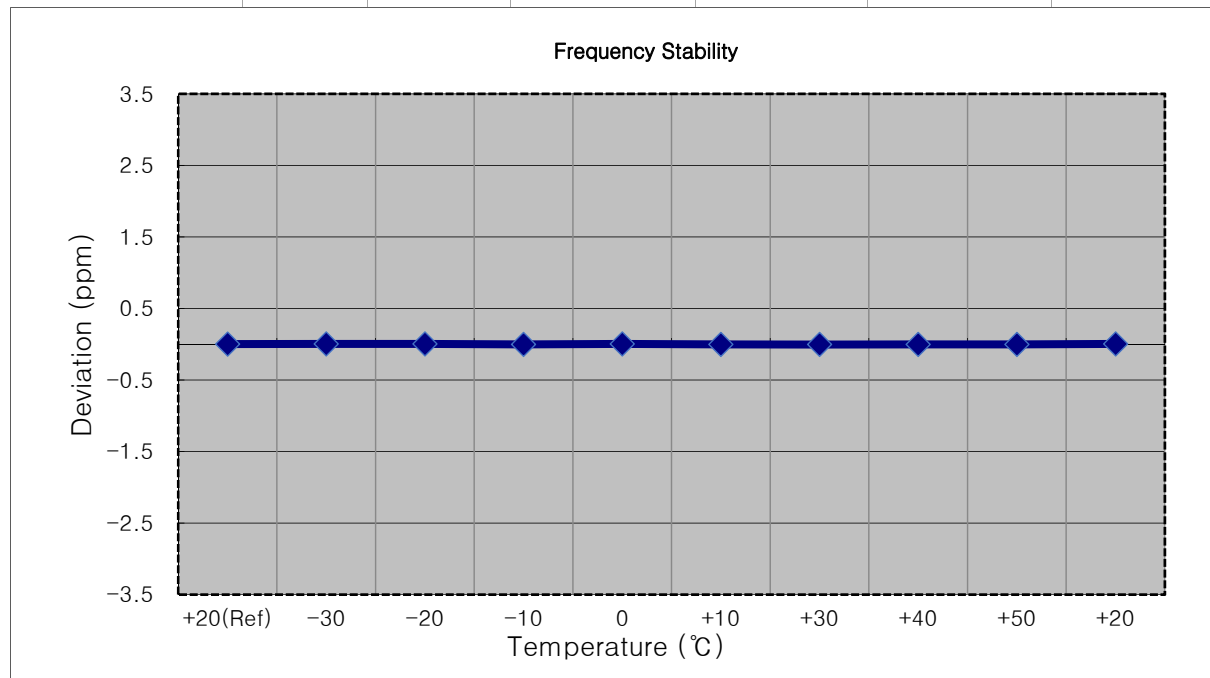

9. TEST DATA(Sub 1 ANT)

9.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1710.7	LTE B66/B4 (1.4 MHz)	QPSK	-20.52	12.85	10.04	2.06	H	<2.00	0.121	20.83	1	0
		16-QAM	-21.22	12.15	10.04	2.06	H		0.103	20.13		
		64-QAM	-22.33	11.04	10.04	2.06	H		0.080	19.02		
		256-QAM	-25.45	7.92	10.04	2.06	H		0.039	15.90		
1745		QPSK	-20.41	13.05	10.18	2.07	H		0.131	21.16	1	0
		16-QAM	-21.23	12.23	10.18	2.07	H		0.108	20.34		
		64-QAM	-22.34	11.12	10.18	2.07	H		0.084	19.23		
		256-QAM	-25.46	8.00	10.18	2.07	H		0.041	16.11		
1779.3		QPSK	-21.37	12.45	10.26	2.09	H		0.115	20.62	1	0
		16-QAM	-22.09	11.73	10.26	2.09	H		0.098	19.90		
		64-QAM	-23.22	10.60	10.26	2.09	H		0.075	18.77		
		256-QAM	-26.34	7.48	10.26	2.09	H		0.037	15.65		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1711.5	LTE B66/B4 (3 MHz)	QPSK	-20.45	12.92	10.04	2.06	H	<2.00	0.123	20.90	1	0
		16-QAM	-21.14	12.23	10.04	2.06	H		0.105	20.21		
		64-QAM	-22.24	11.13	10.04	2.06	H		0.081	19.11		
		256-QAM	-25.36	8.01	10.04	2.06	H		0.040	15.99		
1745		QPSK	-20.50	12.96	10.18	2.07	H		0.128	21.07	1	0
		16-QAM	-21.18	12.28	10.18	2.07	H		0.109	20.39		
		64-QAM	-22.29	11.17	10.18	2.07	H		0.085	19.28		
		256-QAM	-25.41	8.05	10.18	2.07	H		0.041	16.16		
1778.5		QPSK	-21.18	12.64	10.26	2.09	H		0.121	20.81	1	0
		16-QAM	-21.97	11.85	10.26	2.09	H		0.100	20.02		
		64-QAM	-23.10	10.72	10.26	2.09	H		0.077	18.89		
		256-QAM	-26.21	7.61	10.26	2.09	H		0.038	15.78		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1712.5	LTE B66/B4 (5 MHz)	QPSK	-20.43	12.96	10.06	2.06	H	< 2.00	0.125	20.96	1	0
		16-QAM	-21.15	12.24	10.06	2.06	H		0.106	20.24		
		64-QAM	-22.25	11.14	10.06	2.06	H		0.082	19.14		
		256-QAM	-25.36	8.03	10.06	2.06	H		0.040	16.03		
1745		QPSK	-20.44	13.02	10.18	2.07	H		0.130	21.13	1	0
		16-QAM	-21.14	12.32	10.18	2.07	H		0.110	20.43		
		64-QAM	-22.26	11.20	10.18	2.07	H		0.085	19.31		
		256-QAM	-25.37	8.09	10.18	2.07	H		0.042	16.20		
1777.5		QPSK	-21.22	12.60	10.26	2.09	H		0.119	20.77	1	0
		16-QAM	-21.97	11.85	10.26	2.09	H		0.100	20.02		
		64-QAM	-23.08	10.74	10.26	2.09	H		0.078	18.91		
		256-QAM	-26.21	7.61	10.26	2.09	H		0.038	15.78		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1715	LTE B66/B4 (10 MHz)	QPSK	-20.41	12.98	10.06	2.06	H	<2.00	0.125	20.98	1	0
		16-QAM	-21.22	12.17	10.06	2.06	H		0.104	20.17		
		64-QAM	-22.31	11.08	10.06	2.06	H		0.081	19.08		
		256-QAM	-25.32	8.07	10.06	2.06	H		0.040	16.07		
1745		QPSK	-20.42	13.04	10.18	2.07	H		0.130	21.15	1	0
		16-QAM	-21.21	12.25	10.18	2.07	H		0.109	20.36		
		64-QAM	-22.31	11.15	10.18	2.07	H		0.084	19.26		
		256-QAM	-25.31	8.15	10.18	2.07	H		0.042	16.26		
1775		QPSK	-21.20	12.56	10.25	2.09	H		0.118	20.72	1	0
		16-QAM	-22.02	11.74	10.25	2.09	H		0.098	19.90		
		64-QAM	-23.11	10.65	10.25	2.09	H		0.076	18.81		
		256-QAM	-26.12	7.64	10.25	2.09	H		0.038	15.80		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1717.5	LTE B66/B4 (15 MHz)	QPSK	-20.59	12.83	10.08	2.06	H	<2.00	0.122	20.85	1	0
		16-QAM	-21.36	12.06	10.08	2.06	H		0.102	20.08		
		64-QAM	-22.48	10.94	10.08	2.06	H		0.079	18.96		
		256-QAM	-25.55	7.87	10.08	2.06	H		0.039	15.89		
1745		QPSK	-20.74	12.72	10.18	2.07	H		0.121	20.83	1	0
		16-QAM	-21.46	12.00	10.18	2.07	H		0.103	20.11		
		64-QAM	-22.58	10.88	10.18	2.07	H		0.079	18.99		
		256-QAM	-25.66	7.80	10.18	2.07	H		0.039	15.91		
1772.5		QPSK	-21.30	12.46	10.25	2.09	H		0.115	20.62	1	0
		16-QAM	-22.05	11.71	10.25	2.09	H		0.097	19.87		
		64-QAM	-23.15	10.61	10.25	2.09	H		0.075	18.77		
		256-QAM	-26.21	7.55	10.25	2.09	H		0.037	15.71		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1720	LTE B66/B4 (20 MHz)	QPSK	-20.51	12.91	10.08	2.06	H	<2.00	0.124	20.93	1	0
		16-QAM	-21.31	12.11	10.08	2.06	H		0.103	20.13		
		64-QAM	-22.41	11.01	10.08	2.06	H		0.080	19.03		
		256-QAM	-25.45	7.97	10.08	2.06	H		0.040	15.99		
1745		QPSK	-20.62	12.84	10.18	2.07	H		0.124	20.95	1	0
		16-QAM	-21.41	12.05	10.18	2.07	H		0.104	20.16		
		64-QAM	-22.53	10.93	10.18	2.07	H		0.080	19.04		
		256-QAM	-25.56	7.90	10.18	2.07	H		0.040	16.01		
1770		QPSK	-21.05	12.65	10.24	2.09	H		0.120	20.80	1	0
		16-QAM	-21.85	11.85	10.24	2.09	H		0.100	20.00		
		64-QAM	-22.97	10.73	10.24	2.09	H		0.077	18.88		
		256-QAM	-26.00	7.70	10.24	2.09	H		0.038	15.85		

9.2 RADIATED SPURIOUS EMISSIONS

■ MODE: LTE B66(4)
 ■ MODULATION SIGNAL: 1.4 MHz QPSK
 ■ DISTANCE: 3 meters
 ■ LIMIT: -13 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	RB	
								Size	Offset
131979 (1710.7)	3421.40	-43.23	12.44	-62.21	2.97	H	-52.74	1	0
	5132.10	-30.89	12.31	-43.36	3.81	V	-34.86		
	6842.80	-44.46	11.91	-51.57	4.35	H	-44.01		
132322 (1745)	3490.00	-44.29	12.34	-62.54	3.04	H	-53.24	1	0
	5235.00	-36.74	12.84	-49.32	3.78	V	-40.26		
	6980.00	-43.44	11.40	-49.76	4.48	H	-42.84		
132665 (1779.3)	3558.60	-43.59	12.34	-61.03	3.09	H	-51.78	1	0
	5337.90	-34.18	13.09	-47.65	3.80	V	-38.36		
	7117.20	-43.79	10.85	-48.02	4.47	H	-41.64		

9.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
66/4	1.4 MHz	1745.0	QPSK	6	0	5.65
			16-QAM			6.27
			64-QAM			6.36
			256-QAM			6.26
	3 MHz		QPSK	15		5.69
			16-QAM			6.20
			64-QAM			6.40
			256-QAM			6.33
	5 MHz		QPSK	25		5.55
			16-QAM			6.19
			64-QAM			6.38
			256-QAM			6.39
	10 MHz		QPSK	50		5.65
			16-QAM			6.28
			64-QAM			6.38
			256-QAM			6.41
	15 MHz		QPSK	75		5.52
			16-QAM			6.18
			64-QAM			6.36
			256-QAM			6.40
	20 MHz		QPSK	100		5.50
			16-QAM			6.23
			64-QAM			6.35
			256-QAM			6.42

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 198 ~ 221.

9.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
66/4	1.4 MHz	1745.0	QPSK	6	0	1.0988
			16-QAM			1.0931
			64-QAM			1.0942
			256-QAM			1.0915
	3 MHz		QPSK	15		2.7139
			16-QAM			2.7007
			64-QAM			2.7013
			256-QAM			2.7117
	5 MHz		QPSK	25		4.5233
			16-QAM			4.5030
			64-QAM			4.5134
			256-QAM			4.5468
	10 MHz		QPSK	50		9.0071
			16-QAM			9.0011
			64-QAM			8.9950
			256-QAM			9.0132
	15 MHz		QPSK	75		13.486
			16-QAM			13.459
			64-QAM			13.475
			256-QAM			13.471
	20 MHz		QPSK	100		18.007
			16-QAM			17.935
			64-QAM			17.919
			256-QAM			17.972

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 222 ~ 245.

9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
66/4	1.4	1710.70	9.1226	28.5910	-67.944	-39.353	-13.00
		1745.00	7.4178	28.5910	-66.626	-38.035	
		1779.30	3.5594	27.9760	-66.260	-38.284	
	3	1711.50	5.2144	28.5910	-65.817	-37.226	
		1745.00	8.8535	28.5910	-67.428	-38.837	
		1778.50	7.7268	28.5910	-67.498	-38.907	
	5	1712.50	3.7688	27.9760	-65.935	-37.959	
		1745.00	8.6042	28.5910	-67.059	-38.468	
		1777.50	8.8435	28.5910	-67.895	-39.304	
	10	1715.00	3.2503	27.9760	-67.868	-39.892	
		1745.00	9.9502	28.5910	-68.333	-39.742	
		1775.00	9.7807	28.5910	-67.915	-39.324	
	15	1717.50	9.7009	28.5910	-66.166	-37.575	
		1745.00	9.1526	28.5910	-66.690	-38.099	
		1772.50	8.8435	28.5910	-67.393	-38.802	
	20	1720.00	5.1845	28.5910	-66.418	-37.827	
		1745.00	9.9701	28.5910	-67.601	-39.010	
		1770.00	8.8734	28.5910	-67.405	-38.814	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 246 ~ 281.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


9.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 282 ~ 317.

9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


MODE:	<u>LTE 66/4</u>
OPERATING FREQUENCY:	<u>1710,700,000 Hz</u>
CHANNEL:	<u>131979 (1.4 MHz)</u>
REFERENCE VOLTAGE:	<u>3.860 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1710 700 005	0.0	0.000 000	0.000
100 %		-30	1710 700 009	4.2	0.000 000	0.002
100 %		-20	1710 700 000	-5.1	0.000 000	-0.003
100 %		-10	1710 700 007	2.7	0.000 000	0.002
100 %		0	1710 700 010	5.0	0.000 000	0.003
100 %		+10	1710 700 008	3.5	0.000 000	0.002
100 %		+30	1710 700 002	-3.0	0.000 000	-0.002
100 %		+40	1710 700 001	-3.8	0.000 000	-0.002
100 %		+50	1710 700 001	-3.9	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1710 700 009	3.8	0.000 000	0.002

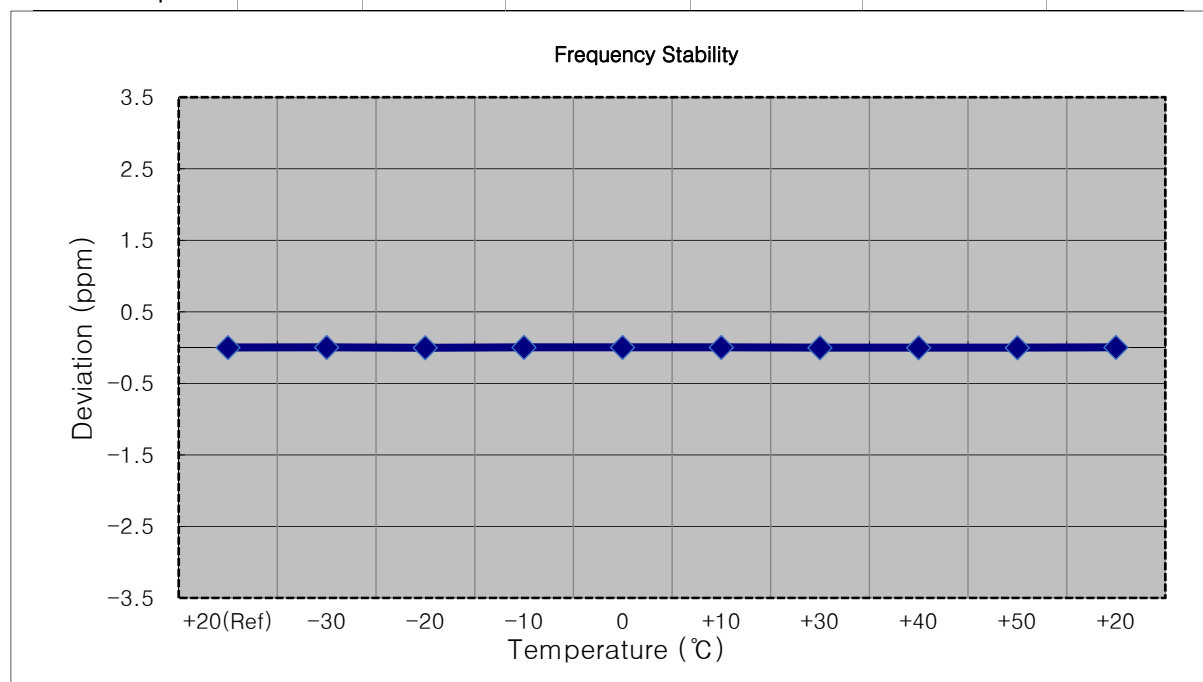


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1711,500,000 Hz
- ▣ CHANNEL: 131987 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1711 500 005	0.0	0.000 000	0.000
100 %		-30	1711 500 002	-3.4	0.000 000	-0.002
100 %		-20	1711 500 000	-5.2	0.000 000	-0.003
100 %		-10	1711 500 012	6.7	0.000 000	0.004
100 %		0	1711 500 012	7.0	0.000 000	0.004
100 %		+10	1711 500 014	8.7	0.000 001	0.005
100 %		+30	1711 500 002	-3.5	0.000 000	-0.002
100 %		+40	1711 500 011	5.7	0.000 000	0.003
100 %		+50	1711 500 008	2.5	0.000 000	0.001
Batt. Endpoint	3.400	+20	1711 500 008	2.5	0.000 000	0.001

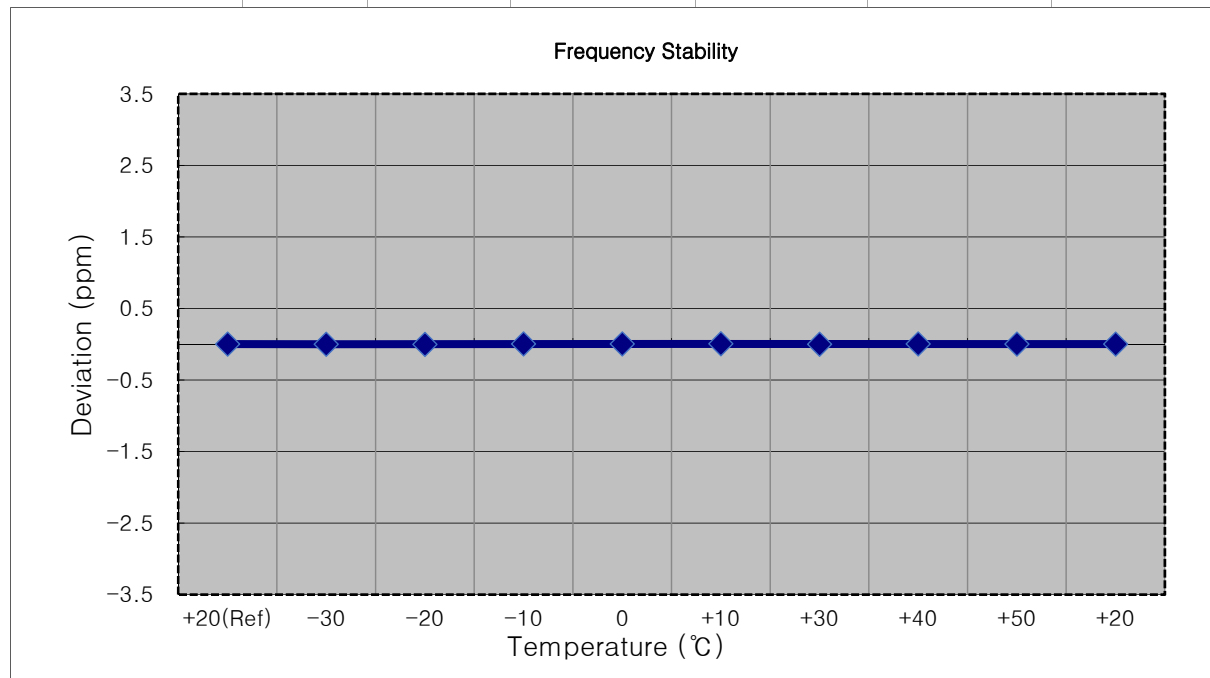


MODE:	<u>LTE 66/4</u>
OPERATING FREQUENCY:	<u>1712,500,000 Hz</u>
CHANNEL:	<u>131997 (5 MHz)</u>
REFERENCE VOLTAGE:	<u>3.860 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1712 499 996	0.0	0.000 000	0.000
100 %		-30	1712 499 992	-3.5	0.000 000	-0.002
100 %		-20	1712 499 991	-4.4	0.000 000	-0.003
100 %		-10	1712 499 992	-3.5	0.000 000	-0.002
100 %		0	1712 499 990	-5.5	0.000 000	-0.003
100 %		+10	1712 499 999	3.6	0.000 000	0.002
100 %		+30	1712 500 001	5.0	0.000 000	0.003
100 %		+40	1712 500 000	4.7	0.000 000	0.003
100 %		+50	1712 500 000	3.9	0.000 000	0.002
Batt. Endpoint	3.400	+20	1712 499 992	-3.6	0.000 000	-0.002

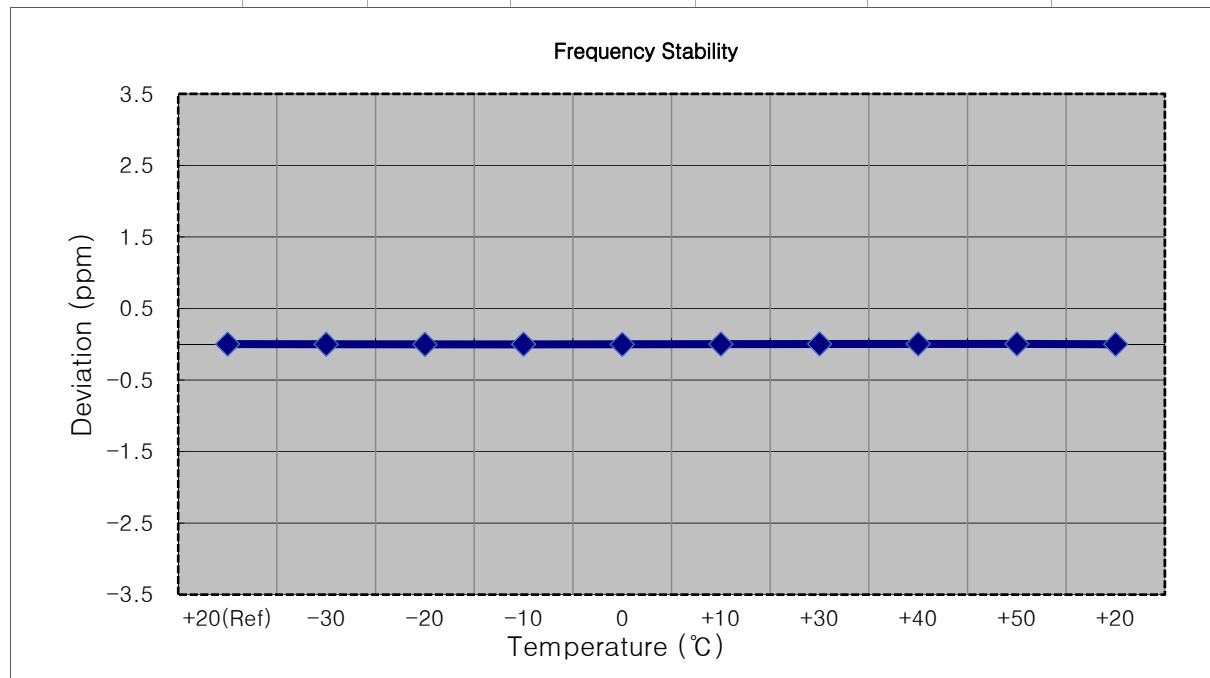


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1715,000,000 Hz
- ▣ CHANNEL: 132022 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1715 000 005	0.0	0.000 000	0.000
100 %		-30	1715 000 010	5.3	0.000 000	0.003
100 %		-20	1715 000 010	5.2	0.000 000	0.003
100 %		-10	1715 000 009	4.0	0.000 000	0.002
100 %		0	1715 000 008	3.3	0.000 000	0.002
100 %		+10	1715 000 001	-3.3	0.000 000	-0.002
100 %		+30	1715 000 011	6.5	0.000 000	0.004
100 %		+40	1715 000 001	-4.1	0.000 000	-0.002
100 %		+50	1715 000 010	5.0	0.000 000	0.003
Batt. Endpoint	3.400	+20	1715 000 011	6.1	0.000 000	0.004

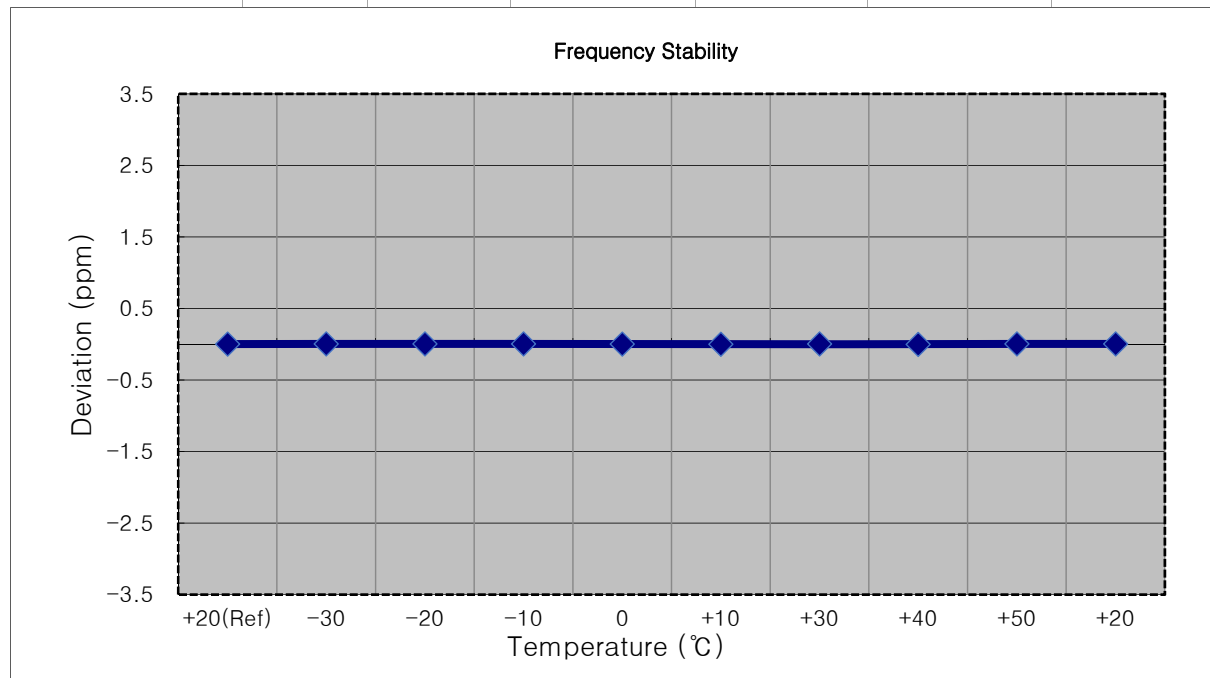


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1717,500,000 Hz
- ▣ CHANNEL: 132047 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1717 499 996	0.0	0.000 000	0.000
100 %		-30	1717 499 999	3.3	0.000 000	0.002
100 %		-20	1717 499 991	-4.6	0.000 000	-0.003
100 %		-10	1717 500 001	5.5	0.000 000	0.003
100 %		0	1717 499 992	-4.3	0.000 000	-0.003
100 %		+10	1717 499 992	-4.2	0.000 000	-0.002
100 %		+30	1717 499 992	-3.5	0.000 000	-0.002
100 %		+40	1717 500 000	4.1	0.000 000	0.002
100 %		+50	1717 499 999	3.2	0.000 000	0.002
Batt. Endpoint	3.400	+20	1717 500 001	5.3	0.000 000	0.003

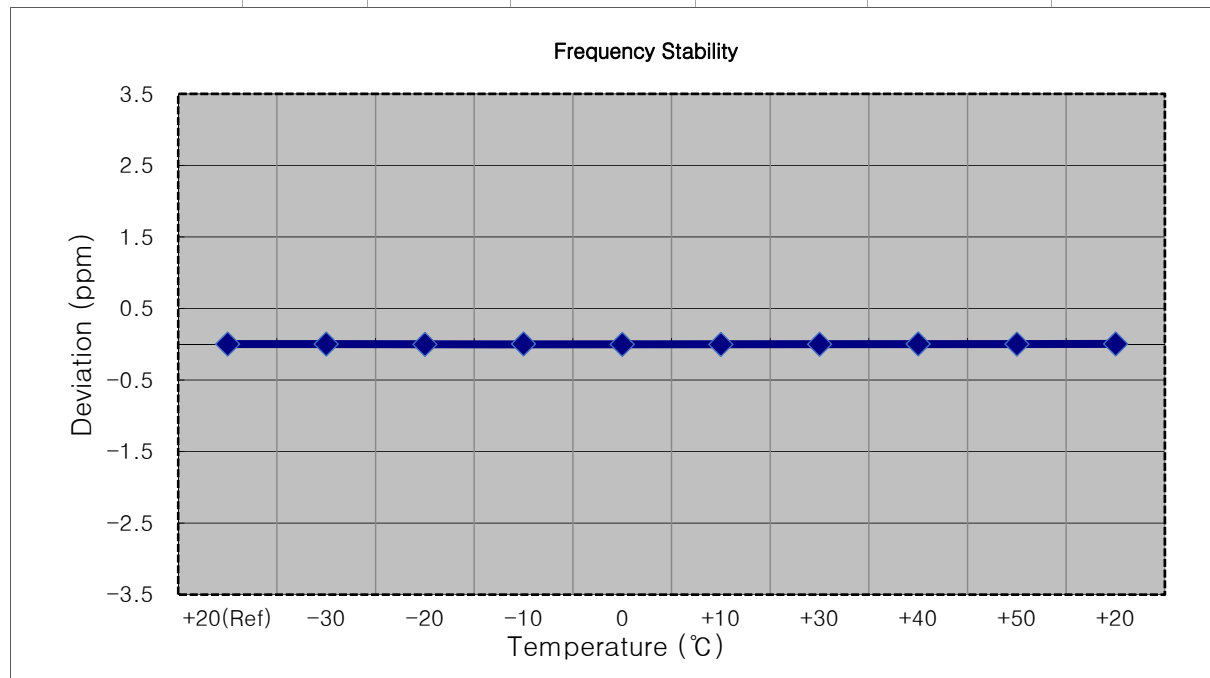


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1720,000,000 Hz
- ▣ CHANNEL: 132072 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1720 000 005	0.0	0.000 000	0.000
100 %		-30	1720 000 010	5.0	0.000 000	0.003
100 %		-20	1720 000 009	3.5	0.000 000	0.002
100 %		-10	1720 000 001	-3.8	0.000 000	-0.002
100 %		0	1720 000 001	-4.3	0.000 000	-0.002
100 %		+10	1720 000 000	-4.9	0.000 000	-0.003
100 %		+30	1720 000 009	4.3	0.000 000	0.002
100 %		+40	1720 000 009	4.3	0.000 000	0.002
100 %		+50	1719 999 999	-6.2	0.000 000	-0.004
Batt. Endpoint	3.400	+20	1720 000 011	5.5	0.000 000	0.003

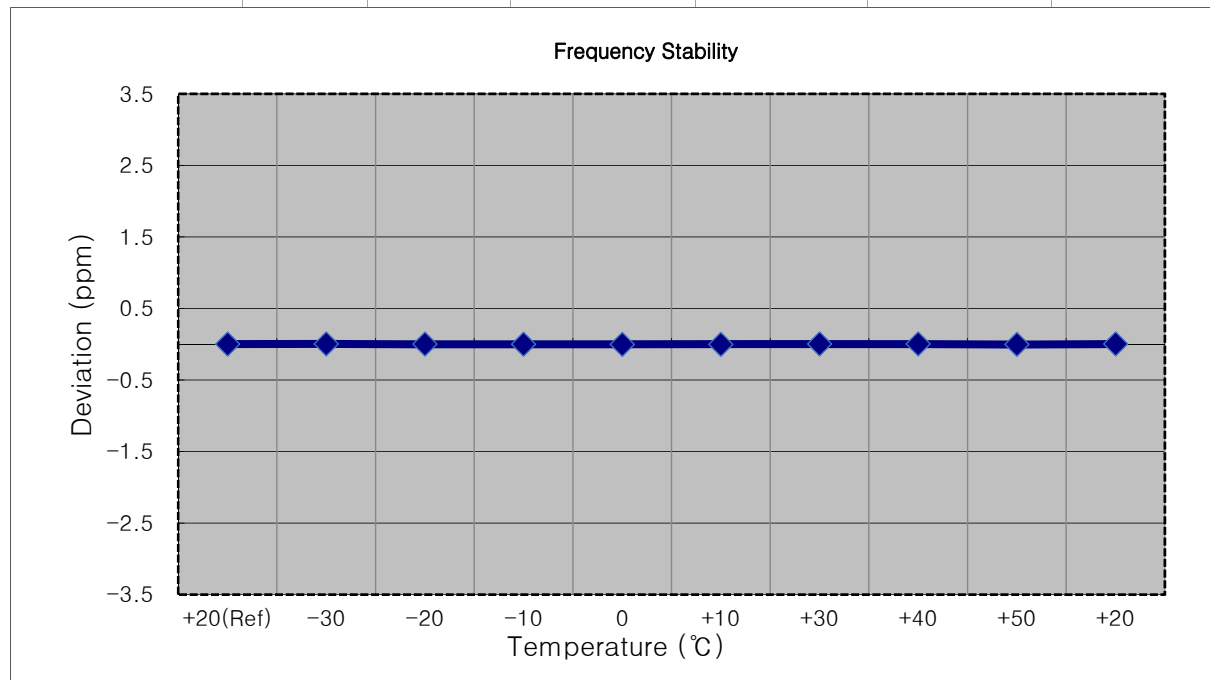


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1744 999 996	0.0	0.000 000	0.000
100 %		-30	1745 000 000	3.5	0.000 000	0.002
100 %		-20	1744 999 992	-3.8	0.000 000	-0.002
100 %		-10	1745 000 001	4.4	0.000 000	0.003
100 %		0	1745 000 000	3.7	0.000 000	0.002
100 %		+10	1744 999 990	-5.9	0.000 000	-0.003
100 %		+30	1745 000 002	5.8	0.000 000	0.003
100 %		+40	1745 000 001	4.6	0.000 000	0.003
100 %		+50	1745 000 001	4.7	0.000 000	0.003
Batt. Endpoint	3.400	+20	1745 000 001	4.5	0.000 000	0.003

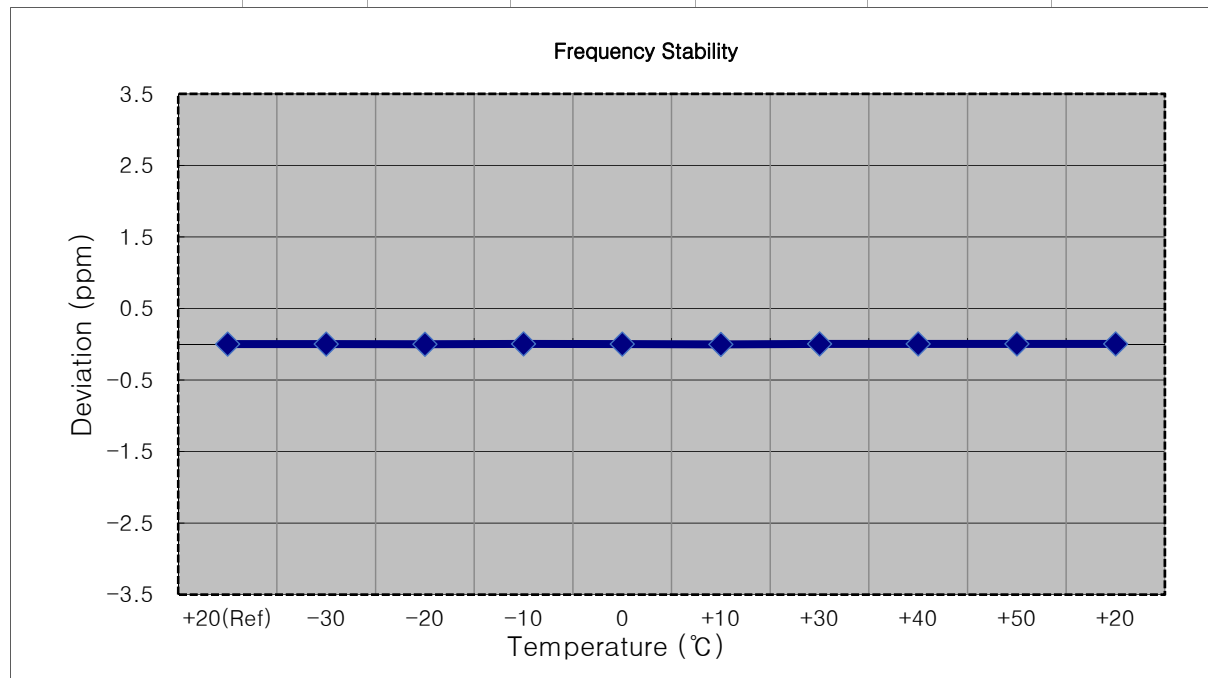


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 007	0.0	0.000 000	0.000
100 %		-30	1745 000 002	-5.1	0.000 000	-0.003
100 %		-20	1745 000 012	5.4	0.000 000	0.003
100 %		-10	1745 000 015	7.9	0.000 000	0.005
100 %		0	1745 000 015	7.9	0.000 000	0.005
100 %		+10	1745 000 013	5.6	0.000 000	0.003
100 %		+30	1745 000 001	-5.8	0.000 000	-0.003
100 %		+40	1745 000 014	7.0	0.000 000	0.004
100 %		+50	1745 000 011	4.1	0.000 000	0.002
Batt. Endpoint	3.400	+20	1745 000 003	-4.0	0.000 000	-0.002

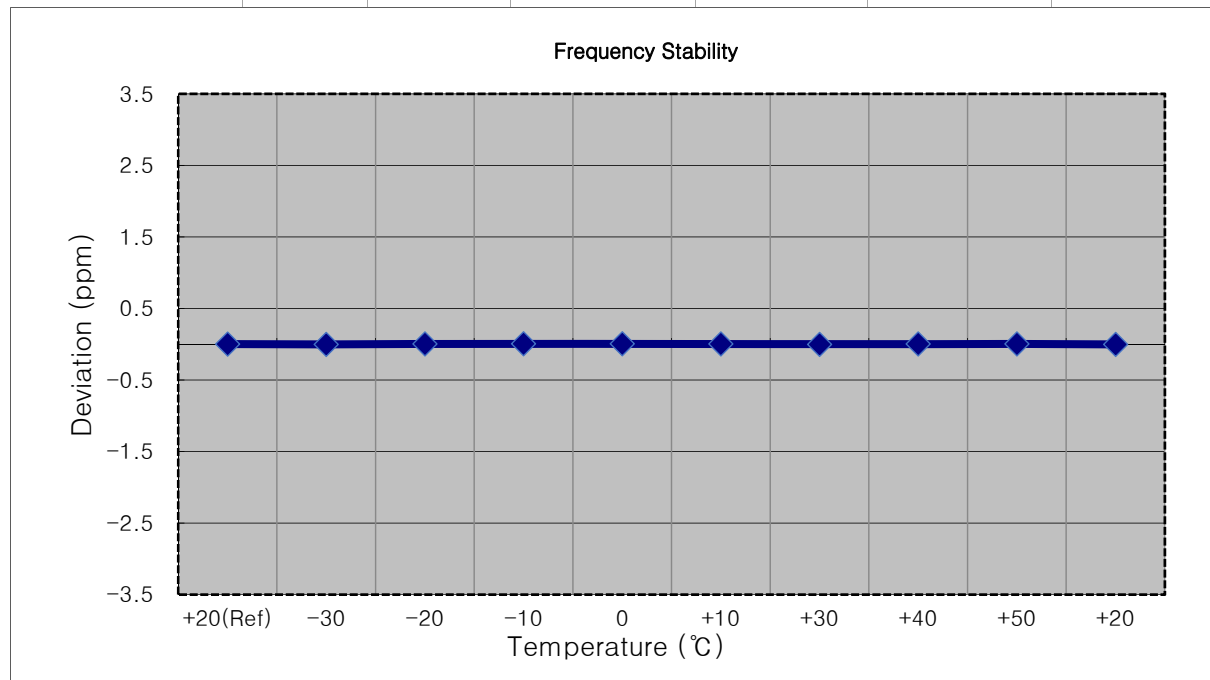


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 005	0.0	0.000 000	0.000
100 %		-30	1745 000 009	4.0	0.000 000	0.002
100 %		-20	1745 000 009	3.8	0.000 000	0.002
100 %		-10	1745 000 000	-4.4	0.000 000	-0.003
100 %		0	1745 000 012	6.9	0.000 000	0.004
100 %		+10	1745 000 002	-3.2	0.000 000	-0.002
100 %		+30	1745 000 002	-3.0	0.000 000	-0.002
100 %		+40	1745 000 000	-5.1	0.000 000	-0.003
100 %		+50	1745 000 001	-3.5	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1745 000 012	7.1	0.000 000	0.004

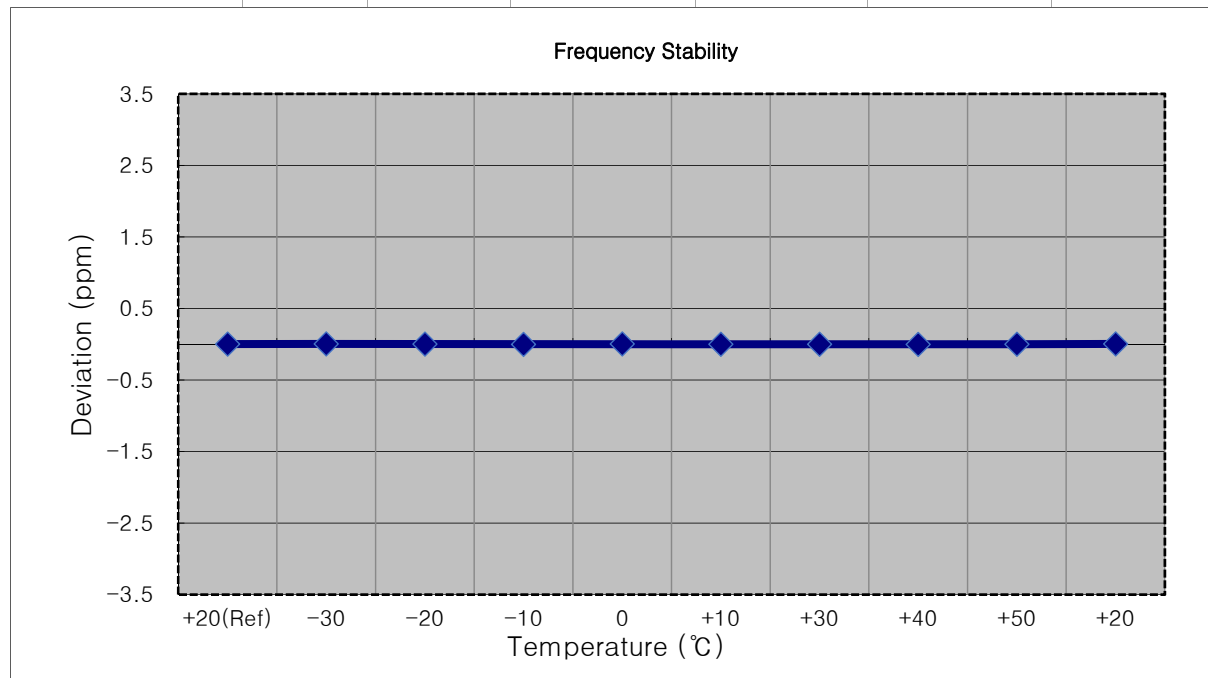


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 006	0.0	0.000 000	0.000
100 %		-30	1745 000 000	-6.4	0.000 000	-0.004
100 %		-20	1745 000 014	7.1	0.000 000	0.004
100 %		-10	1745 000 001	-5.4	0.000 000	-0.003
100 %		0	1745 000 011	4.2	0.000 000	0.002
100 %		+10	1745 000 001	-5.7	0.000 000	-0.003
100 %		+30	1745 000 002	-4.2	0.000 000	-0.002
100 %		+40	1745 000 011	4.8	0.000 000	0.003
100 %		+50	1745 000 012	5.8	0.000 000	0.003
Batt. Endpoint	3.400	+20	1745 000 002	-4.6	0.000 000	-0.003

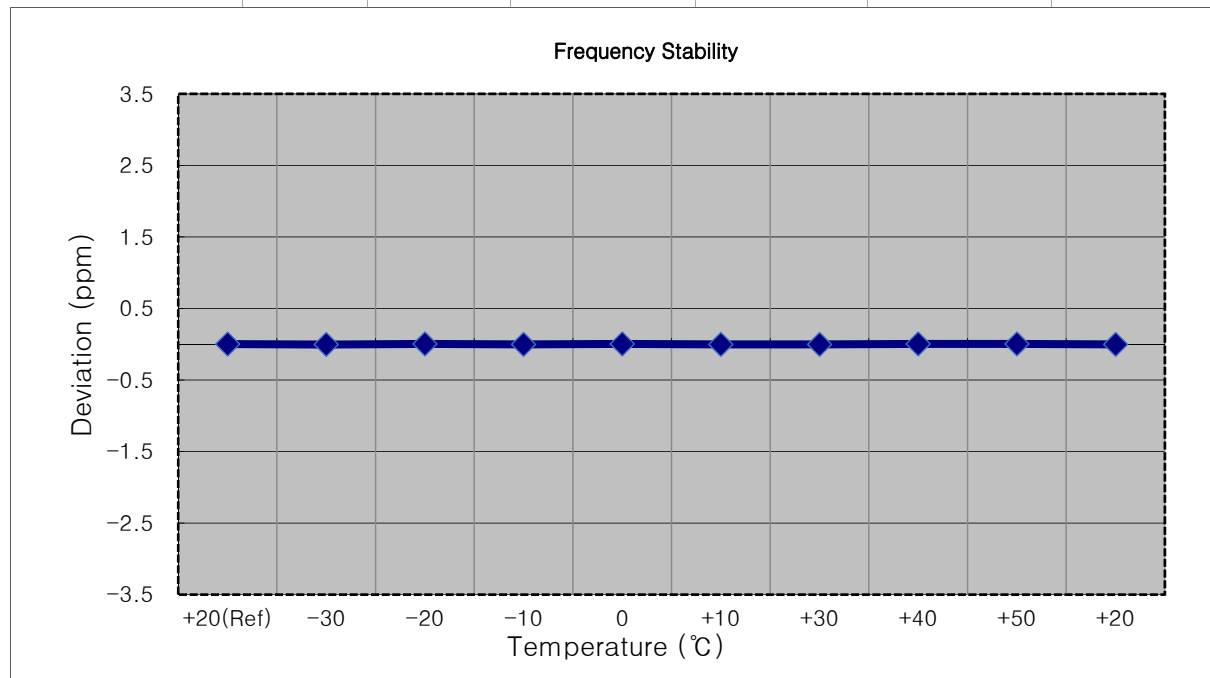


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 005	0.0	0.000 000	0.000
100 %		-30	1745 000 000	-4.9	0.000 000	-0.003
100 %		-20	1745 000 010	5.3	0.000 000	0.003
100 %		-10	1745 000 011	5.4	0.000 000	0.003
100 %		0	1745 000 013	7.5	0.000 000	0.004
100 %		+10	1745 000 010	4.5	0.000 000	0.003
100 %		+30	1745 000 012	6.4	0.000 000	0.004
100 %		+40	1745 000 014	8.6	0.000 000	0.005
100 %		+50	1745 000 011	6.3	0.000 000	0.004
Batt. Endpoint	3.400	+20	1745 000 011	6.3	0.000 000	0.004

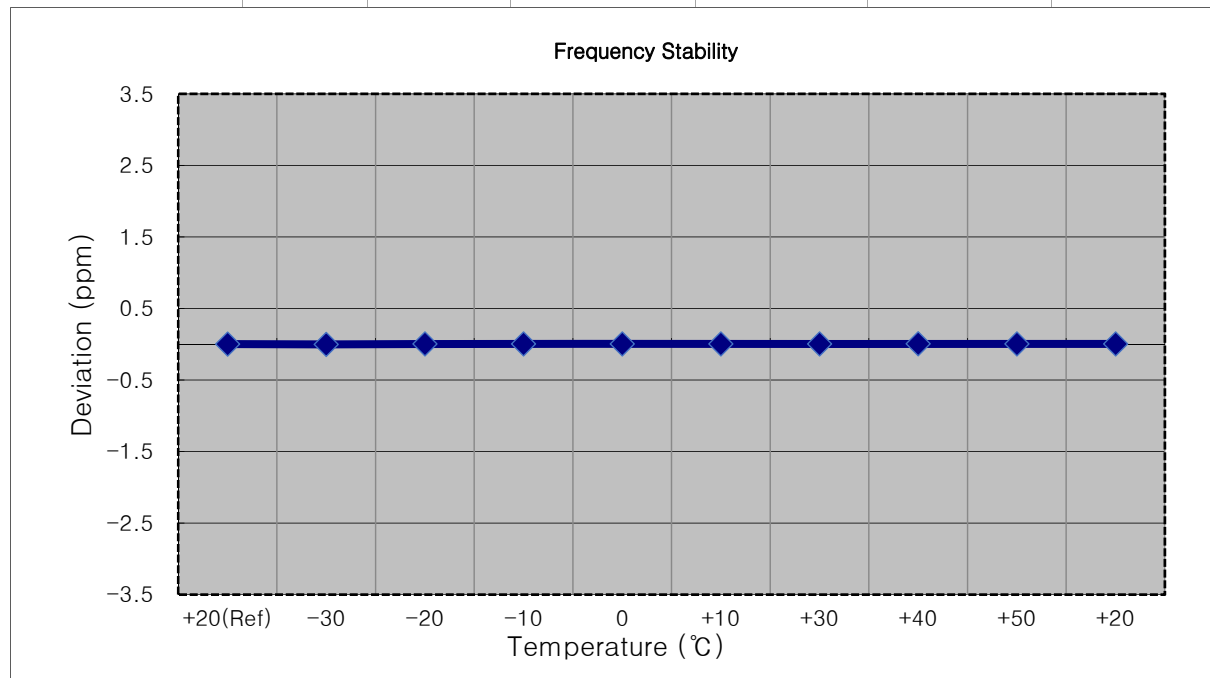


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1745 000 005	0.0	0.000 000	0.000
100 %		-30	1745 000 011	5.6	0.000 000	0.003
100 %		-20	1745 000 011	5.7	0.000 000	0.003
100 %		-10	1745 000 011	6.0	0.000 000	0.003
100 %		0	1745 000 001	-4.1	0.000 000	-0.002
100 %		+10	1744 999 999	-5.8	0.000 000	-0.003
100 %		+30	1745 000 000	-5.5	0.000 000	-0.003
100 %		+40	1745 000 012	7.0	0.000 000	0.004
100 %		+50	1745 000 010	4.7	0.000 000	0.003
Batt. Endpoint	3.400	+20	1745 000 010	5.0	0.000 000	0.003

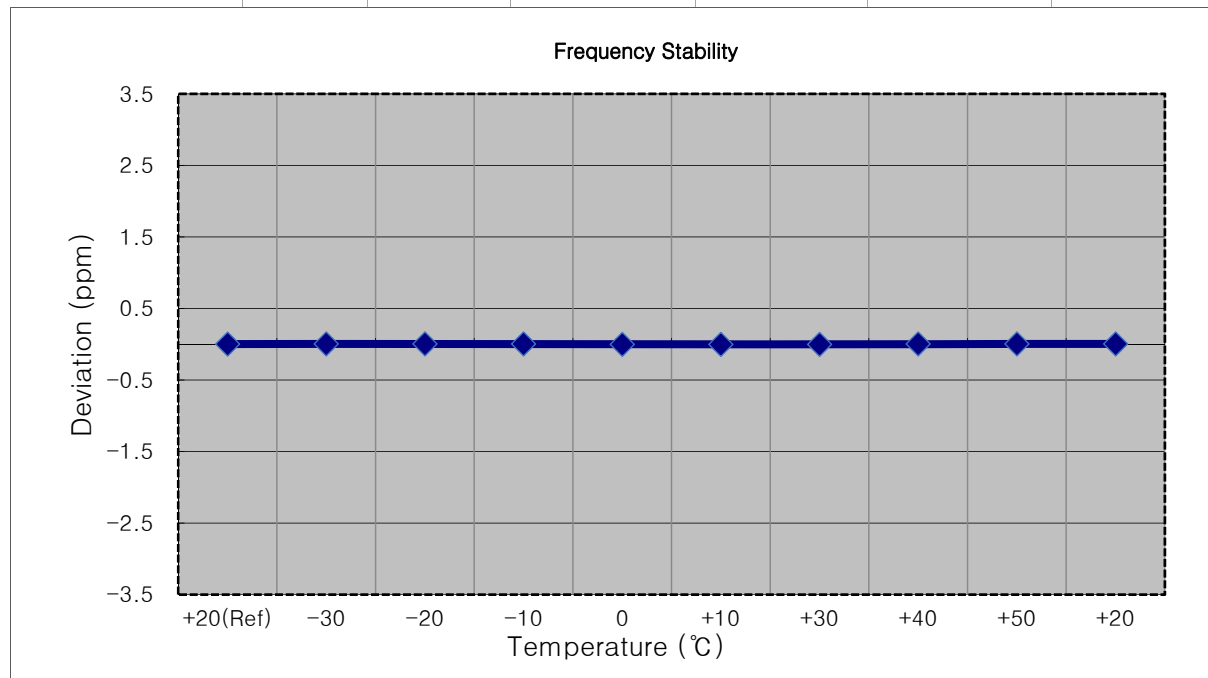


MODE:	<u>LTE 66/4</u>
OPERATING FREQUENCY:	<u>1779,300,000 Hz</u>
CHANNEL:	<u>132665 (1.4 MHz)</u>
REFERENCE VOLTAGE:	<u>3.860 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1779 300 006	0.0	0.000 000	0.000
100 %		-30	1779 300 010	4.7	0.000 000	0.003
100 %		-20	1779 300 011	4.9	0.000 000	0.003
100 %		-10	1779 300 002	-3.4	0.000 000	-0.002
100 %		0	1779 300 002	-3.9	0.000 000	-0.002
100 %		+10	1779 300 001	-4.6	0.000 000	-0.003
100 %		+30	1779 300 013	7.4	0.000 000	0.004
100 %		+40	1779 300 013	7.3	0.000 000	0.004
100 %		+50	1779 300 014	8.1	0.000 000	0.005
Batt. Endpoint	3.400	+20	1779 300 009	3.8	0.000 000	0.002

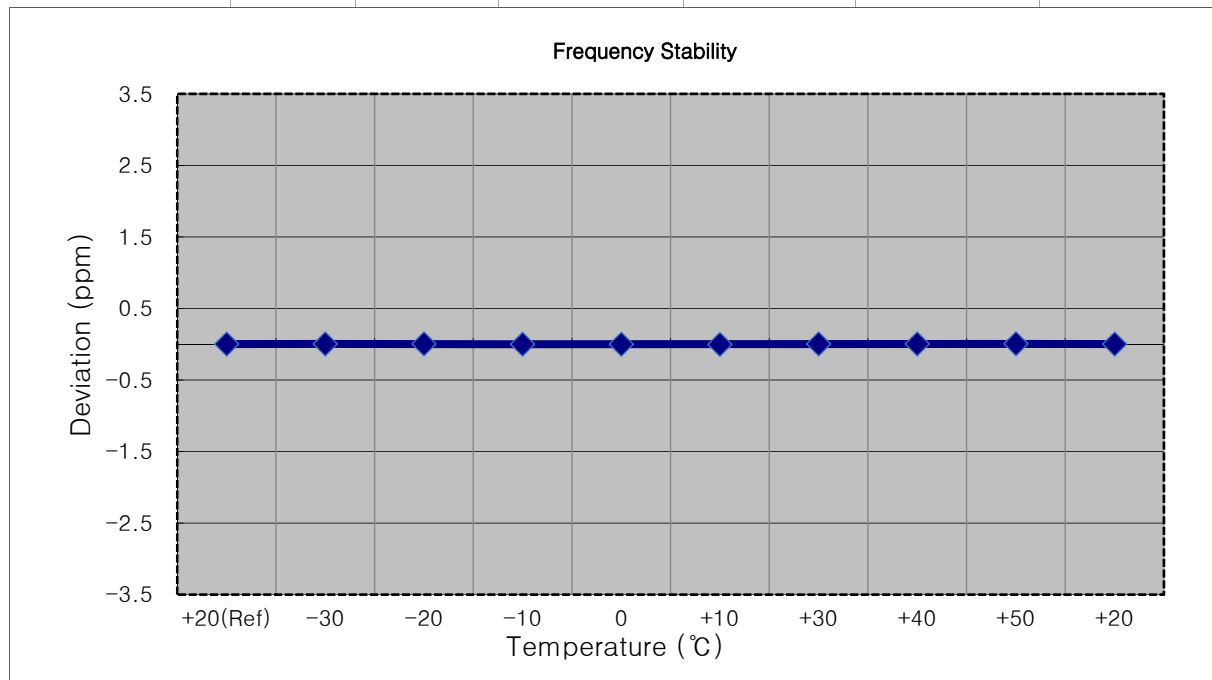


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1778,500,000 Hz
- ▣ CHANNEL: 132657 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1778 500 007	0.0	0.000 000	0.000
100 %		-30	1778 500 016	8.7	0.000 000	0.005
100 %		-20	1778 500 001	-6.5	0.000 000	-0.004
100 %		-10	1778 500 014	6.9	0.000 000	0.004
100 %		0	1778 500 014	6.3	0.000 000	0.004
100 %		+10	1778 500 015	8.0	0.000 000	0.004
100 %		+30	1778 500 016	8.3	0.000 000	0.005
100 %		+40	1778 500 014	6.5	0.000 000	0.004
100 %		+50	1778 500 013	5.1	0.000 000	0.003
Batt. Endpoint	3.400	+20	1778 500 016	8.3	0.000 000	0.005

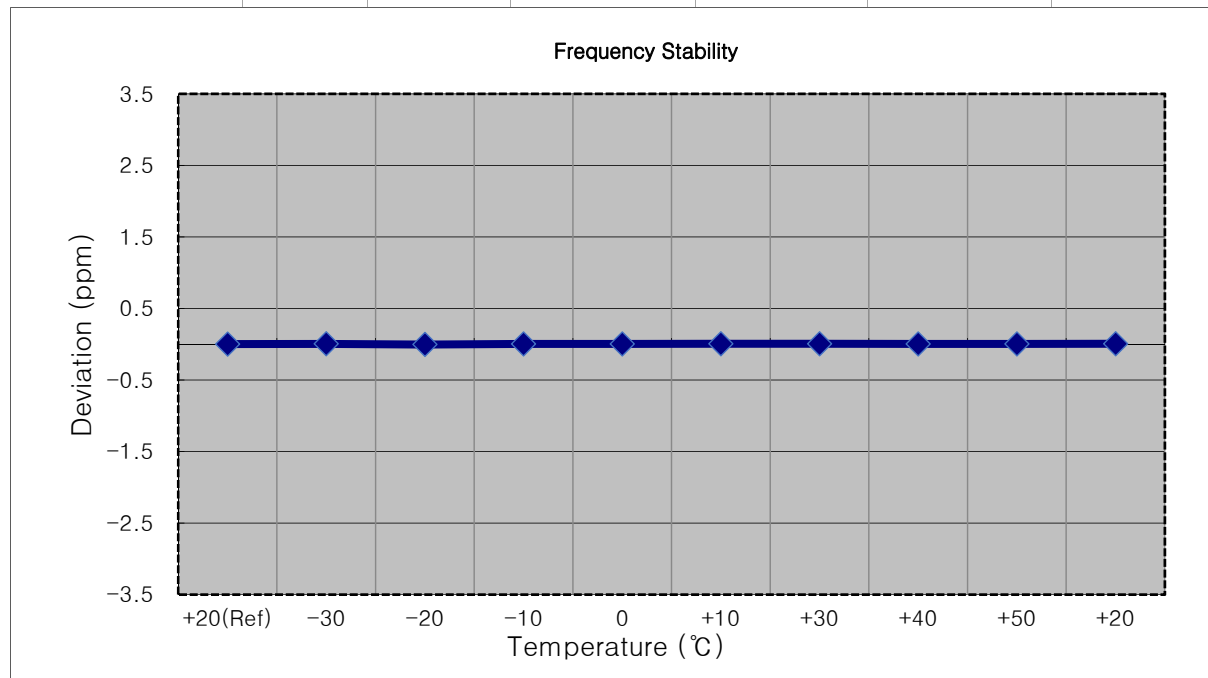


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1777,500,000 Hz
- ▣ CHANNEL: 132647 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1777 500 004	0.0	0.000 000	0.000
100 %		-30	1777 500 008	4.5	0.000 000	0.003
100 %		-20	1777 500 010	5.8	0.000 000	0.003
100 %		-10	1777 500 012	7.8	0.000 000	0.004
100 %		0	1777 500 011	7.5	0.000 000	0.004
100 %		+10	1777 500 000	-3.7	0.000 000	-0.002
100 %		+30	1777 500 010	5.8	0.000 000	0.003
100 %		+40	1777 499 999	-4.9	0.000 000	-0.003
100 %		+50	1777 500 000	-3.9	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1777 500 012	8.1	0.000 000	0.005

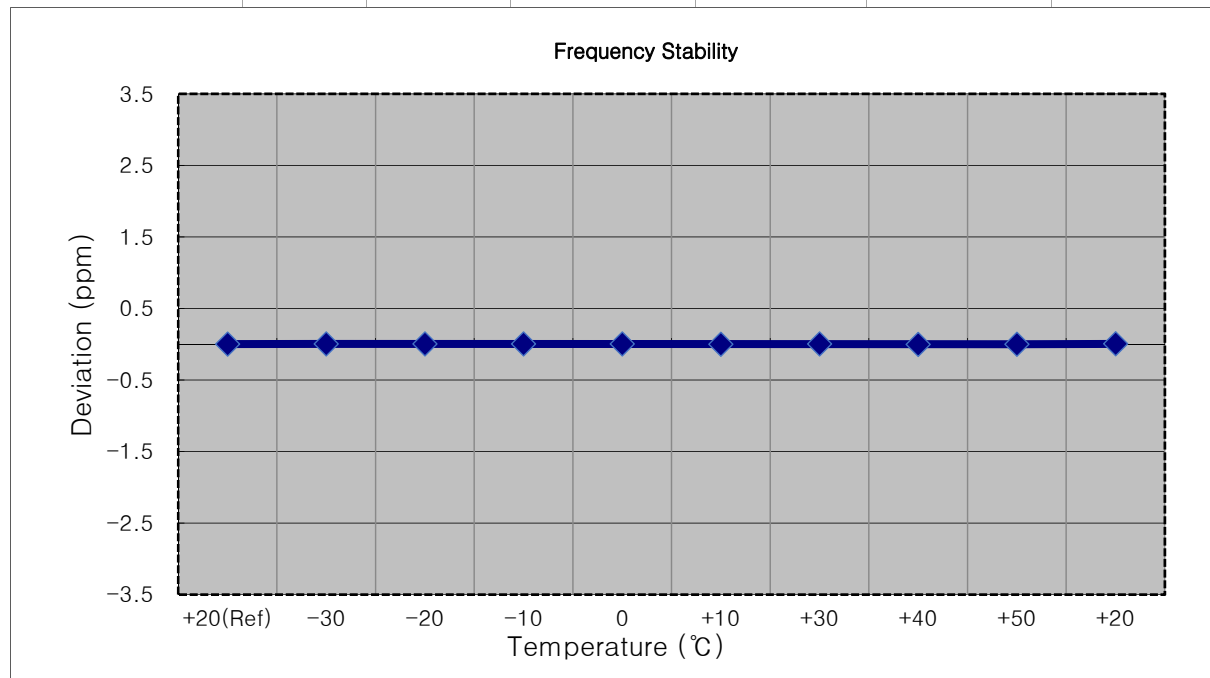


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1775,000,000 Hz
- ▣ CHANNEL: 132622 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1775 000 005	0.0	0.000 000	0.000
100 %		-30	1775 000 000	-4.7	0.000 000	-0.003
100 %		-20	1775 000 001	-4.6	0.000 000	-0.003
100 %		-10	1775 000 001	-4.6	0.000 000	-0.003
100 %		0	1775 000 012	6.4	0.000 000	0.004
100 %		+10	1775 000 009	3.8	0.000 000	0.002
100 %		+30	1775 000 008	3.3	0.000 000	0.002
100 %		+40	1775 000 010	4.9	0.000 000	0.003
100 %		+50	1775 000 001	-4.5	0.000 000	-0.003
Batt. Endpoint	3.400	+20	1775 000 009	3.4	0.000 000	0.002

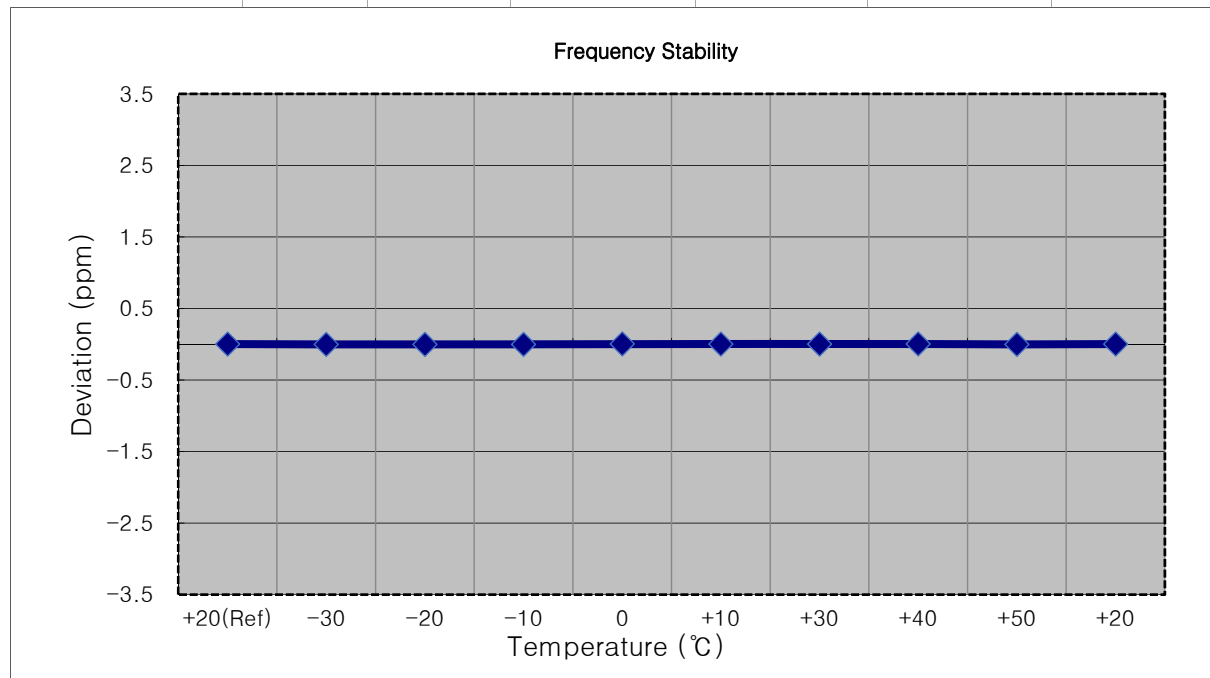


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1772,500,000 Hz
- ▣ CHANNEL: 132597 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1772 499 994	0.0	0.000 000	0.000
100 %		-30	1772 499 989	-4.8	0.000 000	-0.003
100 %		-20	1772 499 991	-3.5	0.000 000	-0.002
100 %		-10	1772 499 998	4.1	0.000 000	0.002
100 %		0	1772 499 998	3.7	0.000 000	0.002
100 %		+10	1772 499 999	5.1	0.000 000	0.003
100 %		+30	1772 499 998	3.7	0.000 000	0.002
100 %		+40	1772 499 998	4.3	0.000 000	0.002
100 %		+50	1772 499 998	4.4	0.000 000	0.002
Batt. Endpoint	3.400	+20	1772 499 990	-4.1	0.000 000	-0.002

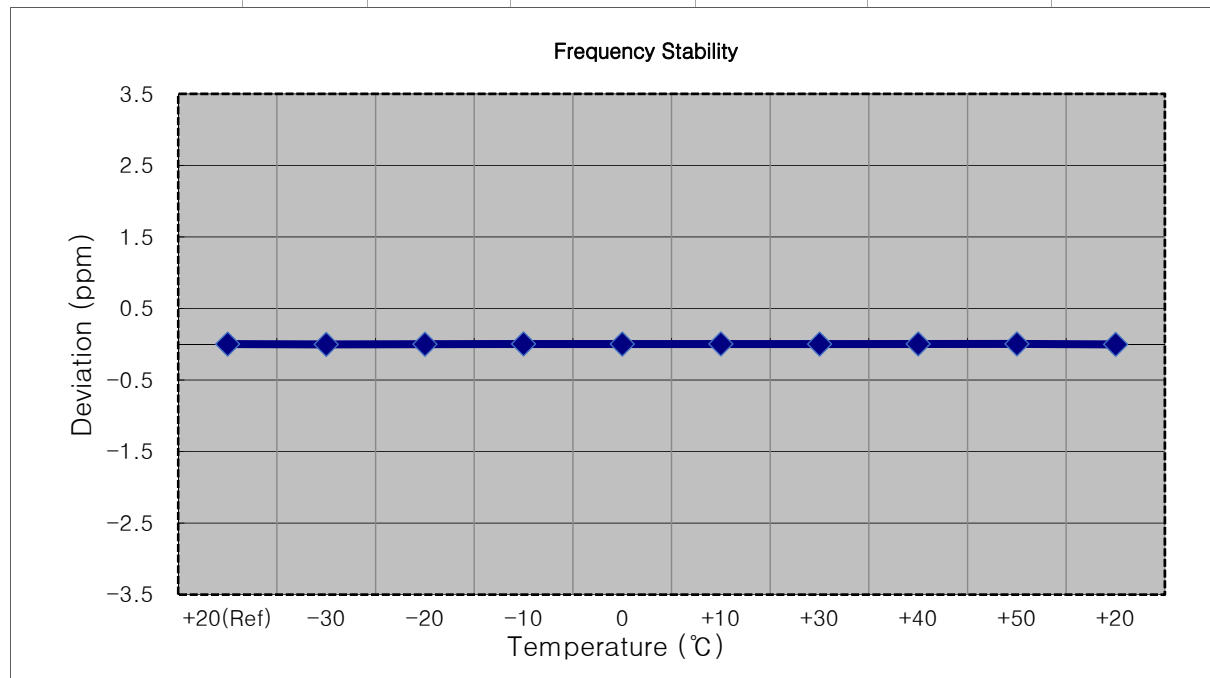


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1770,000,000 Hz
- ▣ CHANNEL: 132572 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	1770 000 005	0.0	0.000 000	0.000
100 %		-30	1770 000 002	-3.6	0.000 000	-0.002
100 %		-20	1770 000 011	5.5	0.000 000	0.003
100 %		-10	1770 000 001	-4.6	0.000 000	-0.003
100 %		0	1770 000 010	5.0	0.000 000	0.003
100 %		+10	1770 000 002	-3.8	0.000 000	-0.002
100 %		+30	1770 000 001	-3.9	0.000 000	-0.002
100 %		+40	1770 000 000	-5.1	0.000 000	-0.003
100 %		+50	1770 000 009	3.8	0.000 000	0.002
Batt. Endpoint	3.400	+20	1770 000 010	4.3	0.000 000	0.002

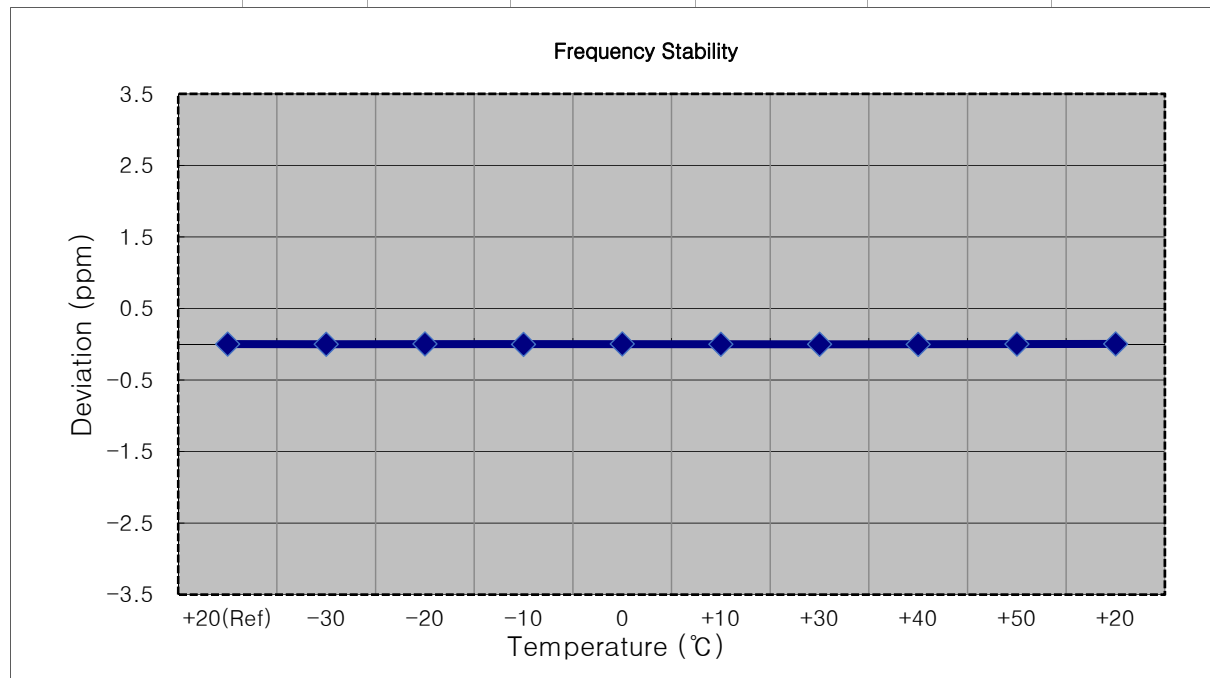


10. TEST PLOTS(Main 1 ANT)


LTE B66_1.4M_PAR_Mid_QPSK_FullRB

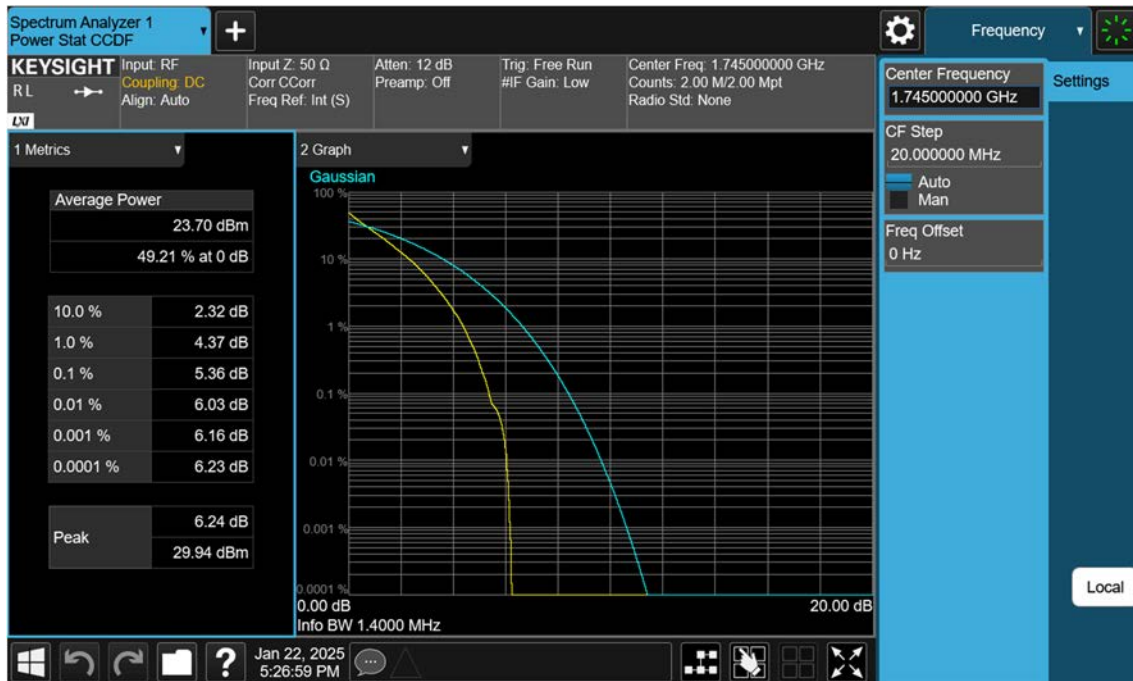

LTE B66_1.4M_PAR_Mid_16QAM_FullRB

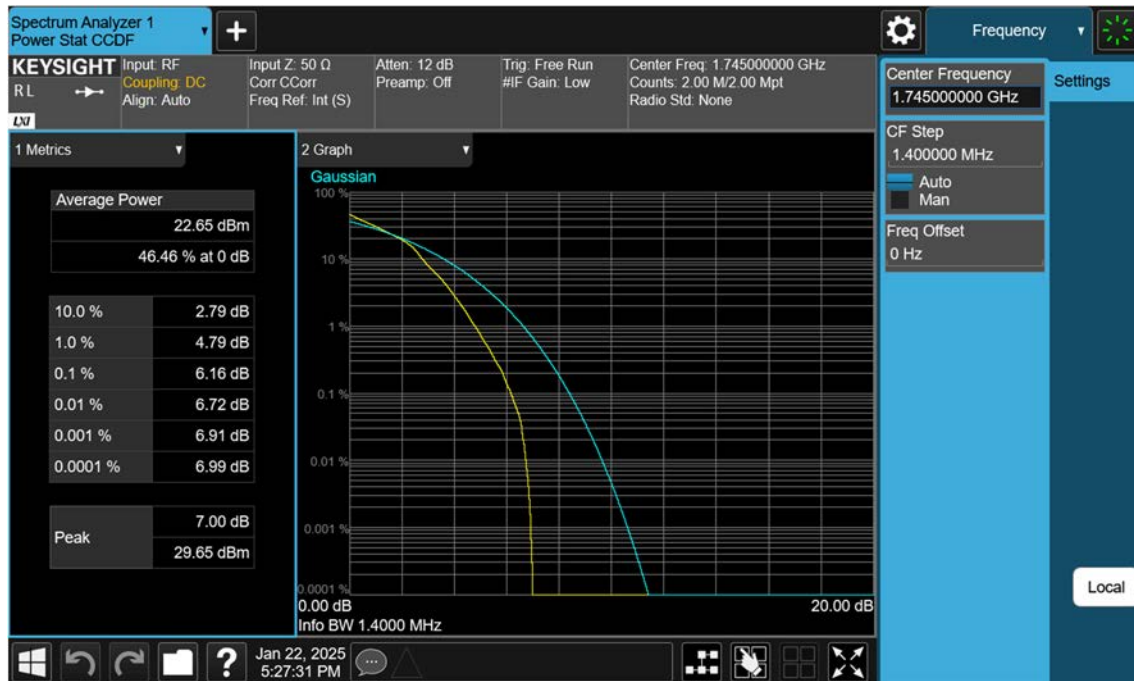


LTE B66_1.4M_PAR_Mid_64QAM_FullRB

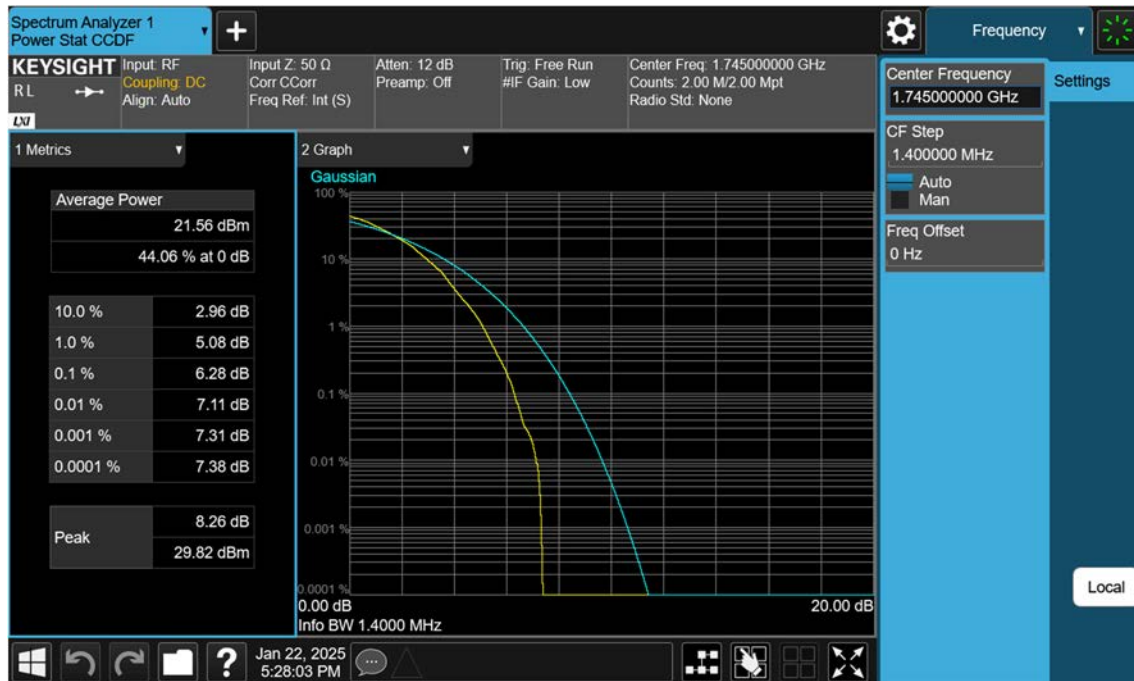


LTE B66_1.4M_PAR_Mid_256QAM_FullRB




LTE B66_3 M_PAR_Mid_QPSK_FullRB

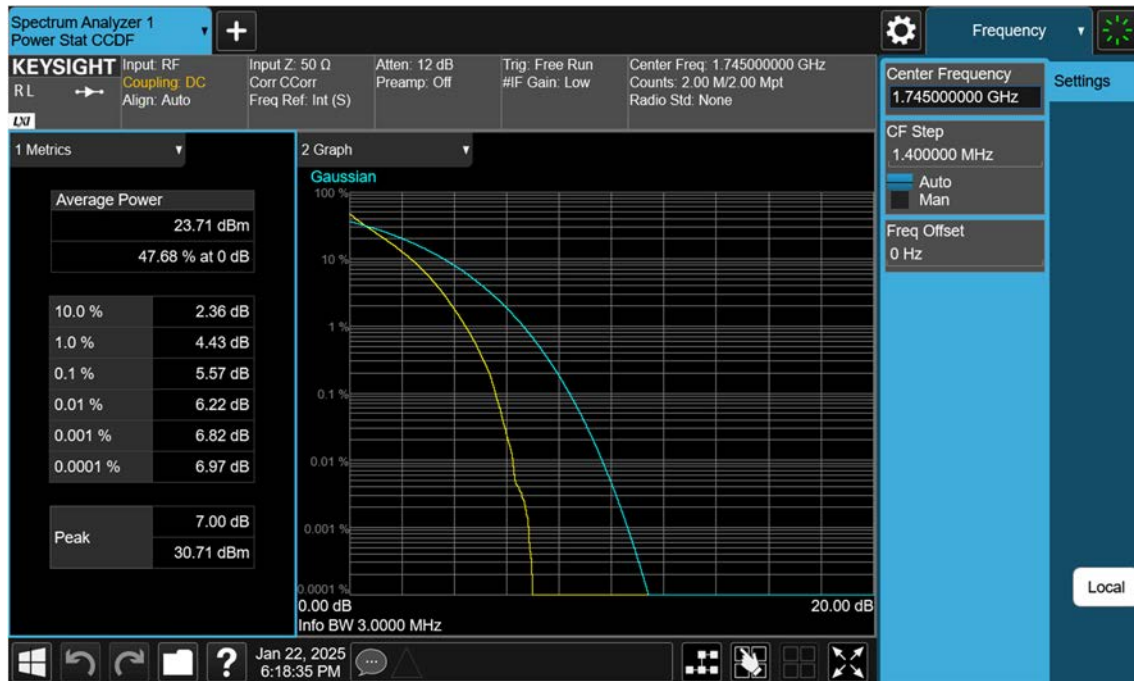


LTE B66_3 M_PAR_Mid_16QAM_FullRB

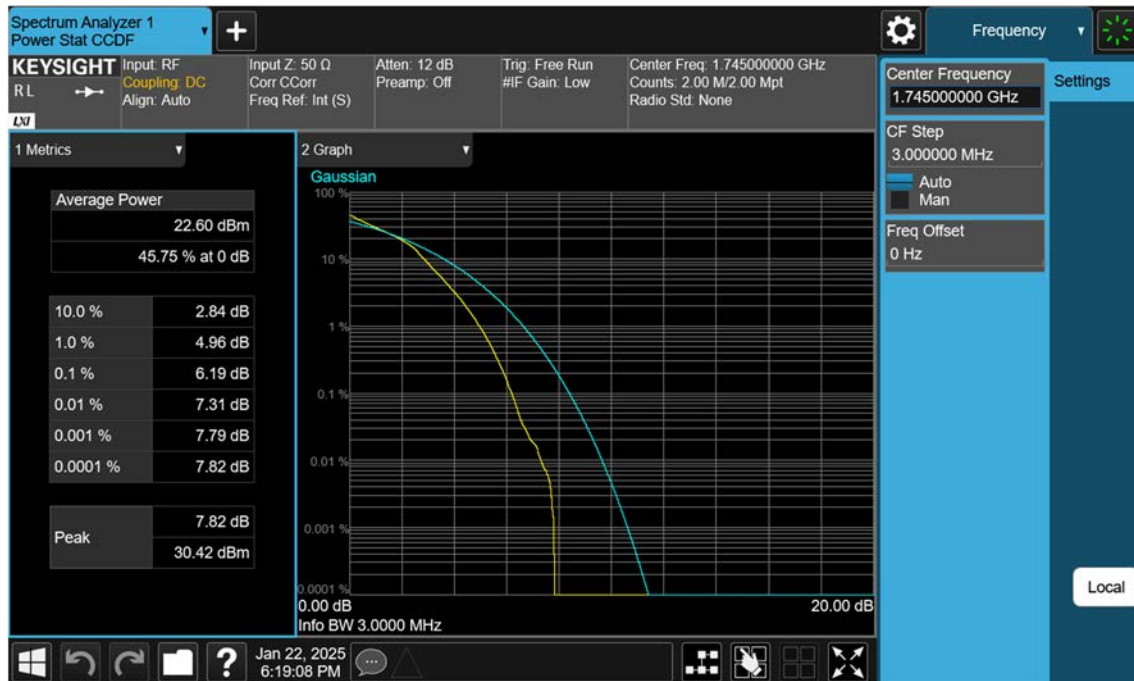


LTE B66_3 M_PAR_Mid_64QAM_FullRB

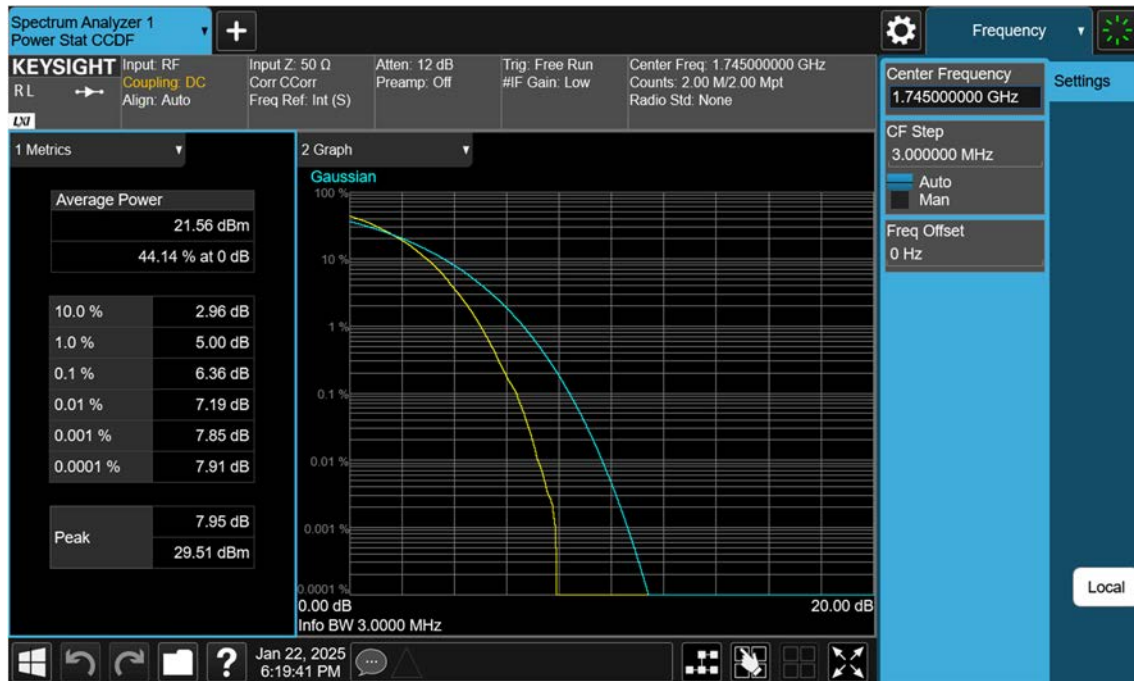


LTE B66_3 M_PAR_Mid_256QAM_FullRB

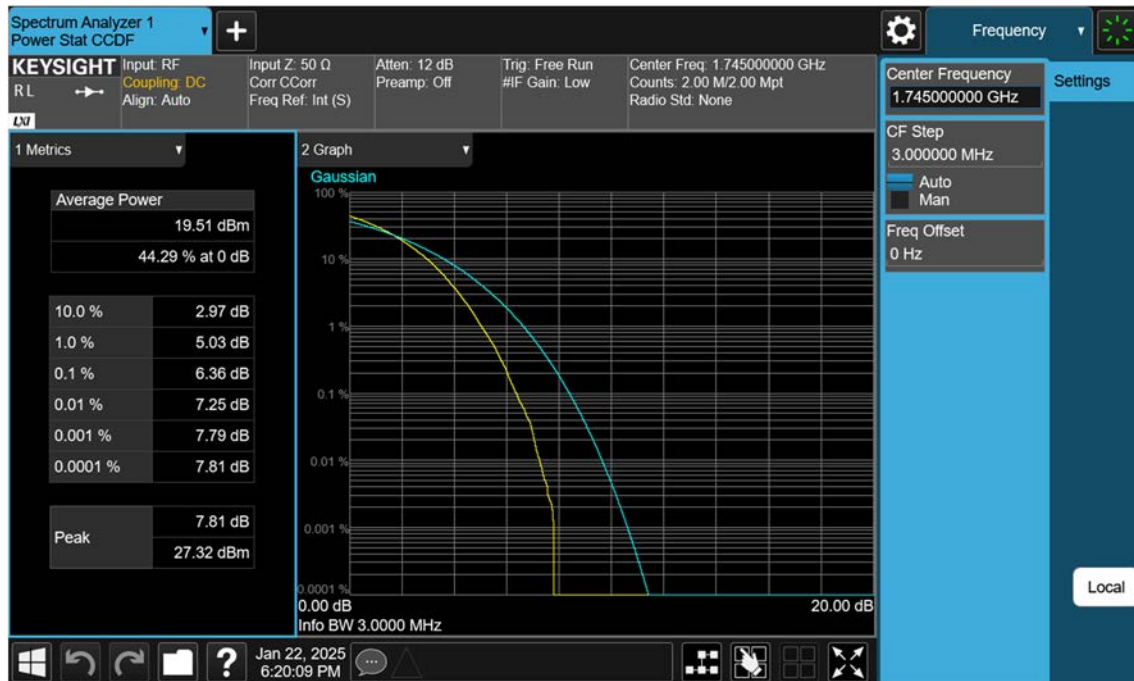


LTE B66_5 M_PAR_Mid_QPSK_FullRB

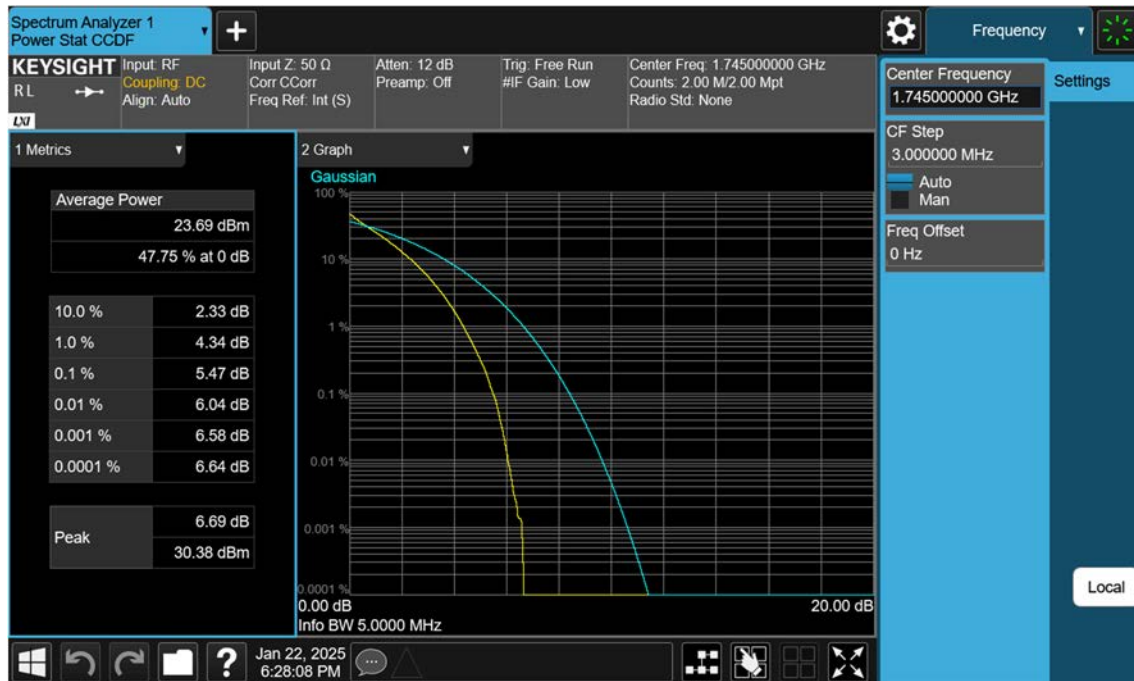


LTE B66_5 M_PAR_Mid_16QAM_FullRB

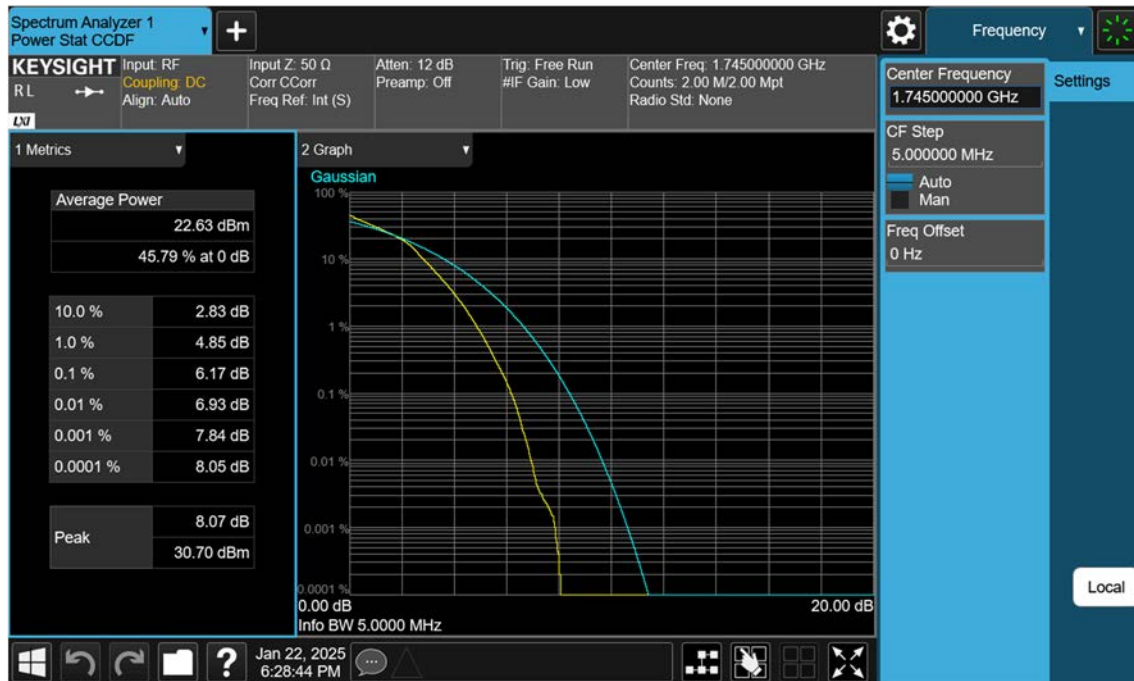


LTE B66_5 M_PAR_Mid_64QAM_FullRB

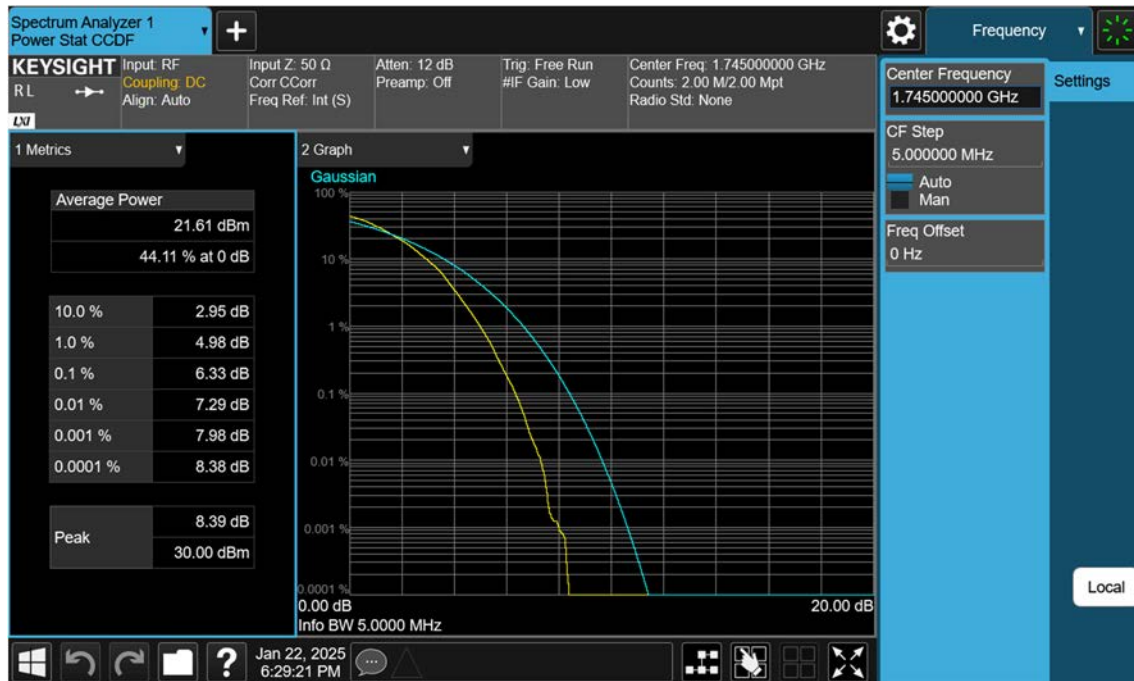


LTE B66_5 M_PAR_Mid_256QAM_FullRB

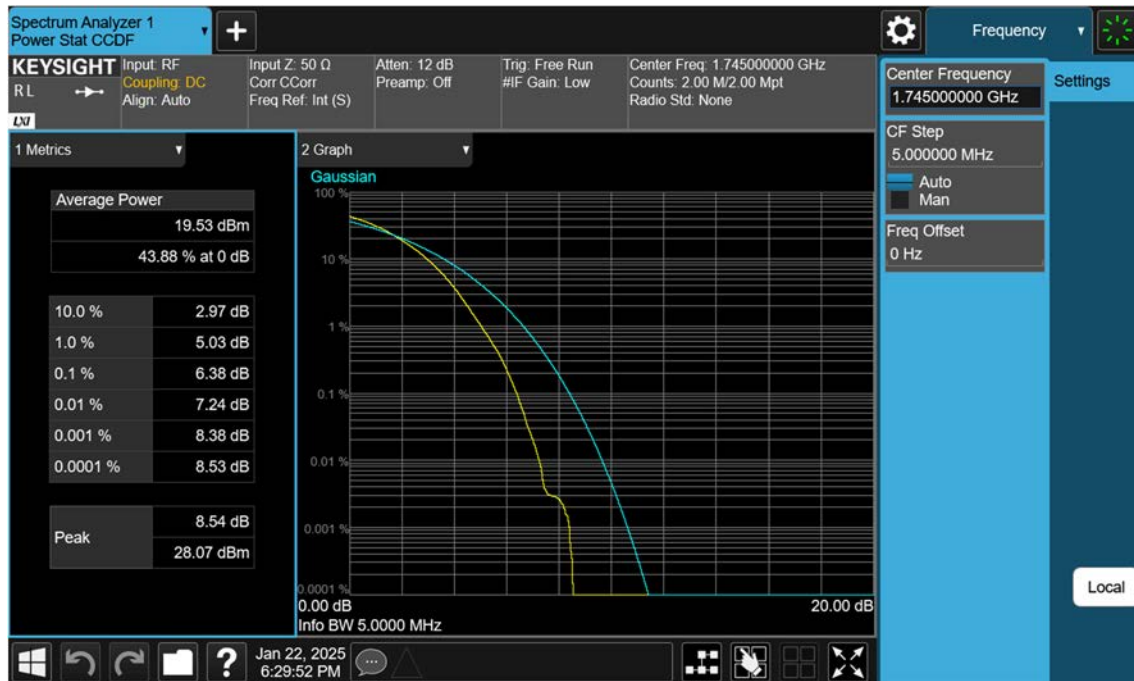


LTE B66_10 M_PAR_Mid_QPSK_FullRB

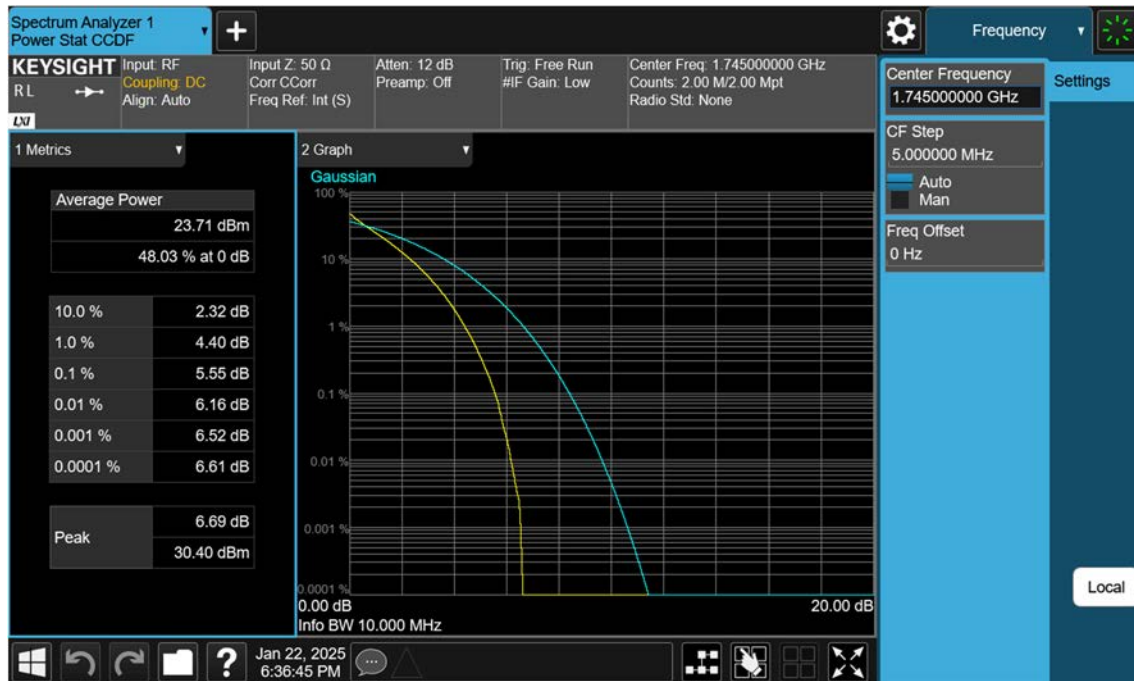


LTE B66_10 M_PAR_Mid_16QAM_FullRB

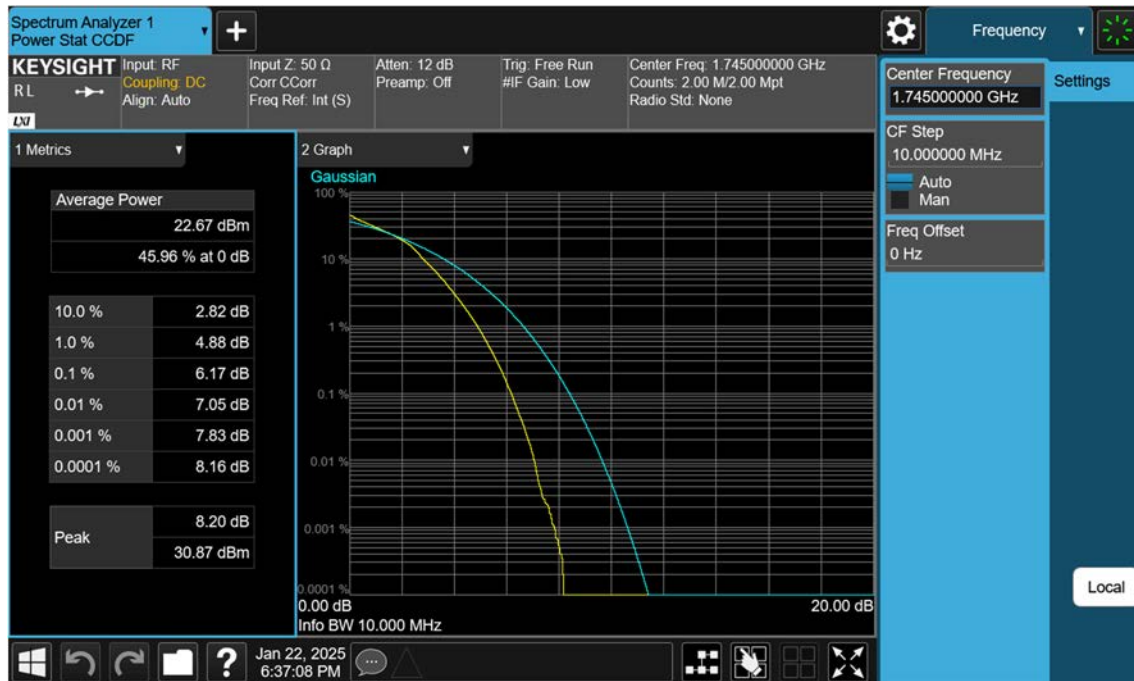


LTE B66_10 M_PAR_Mid_64QAM_FullRB

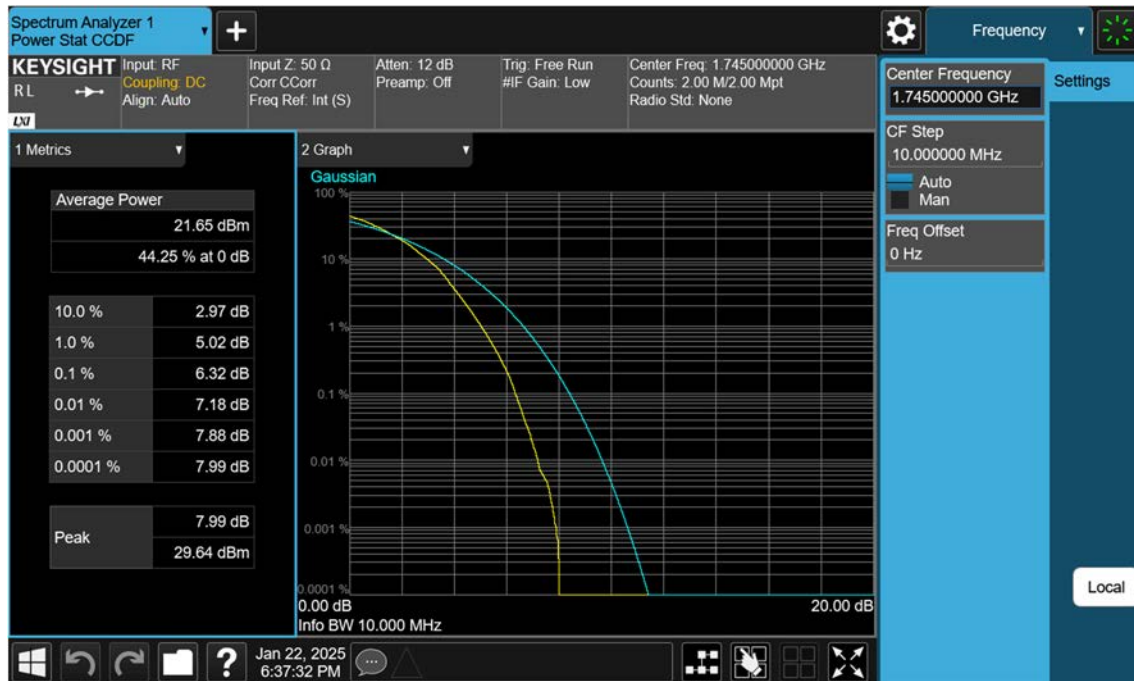


LTE B66_10 M_PAR_Mid_256QAM_FullRB

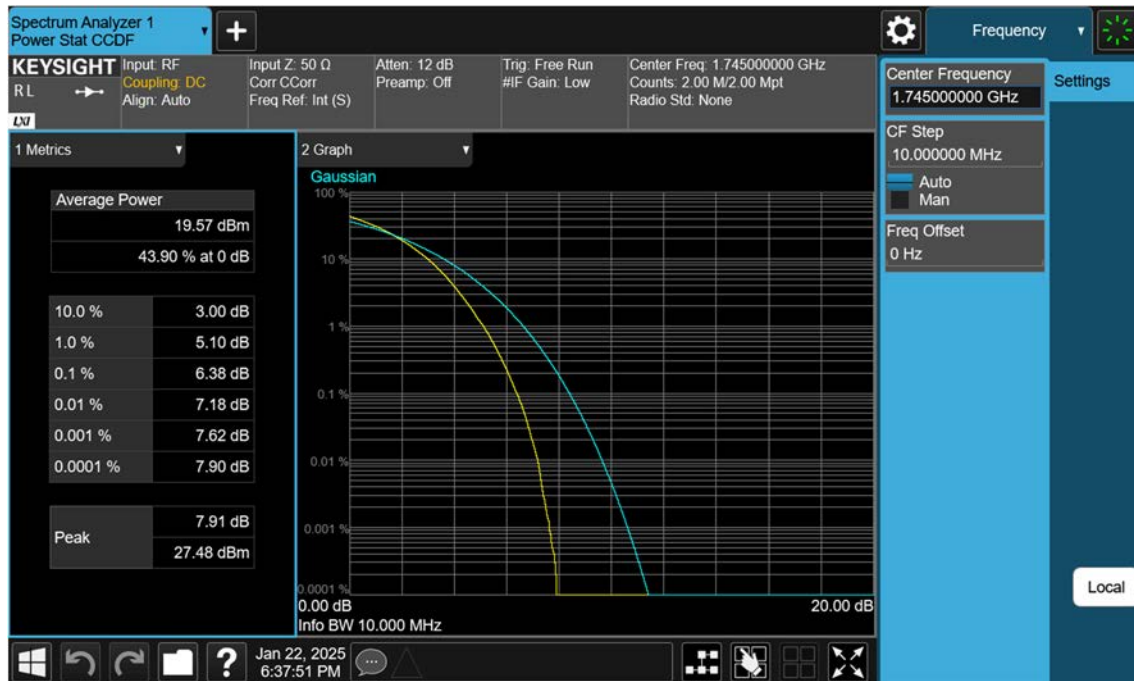


LTE B66_15 M_PAR_Mid_QPSK_FullRB

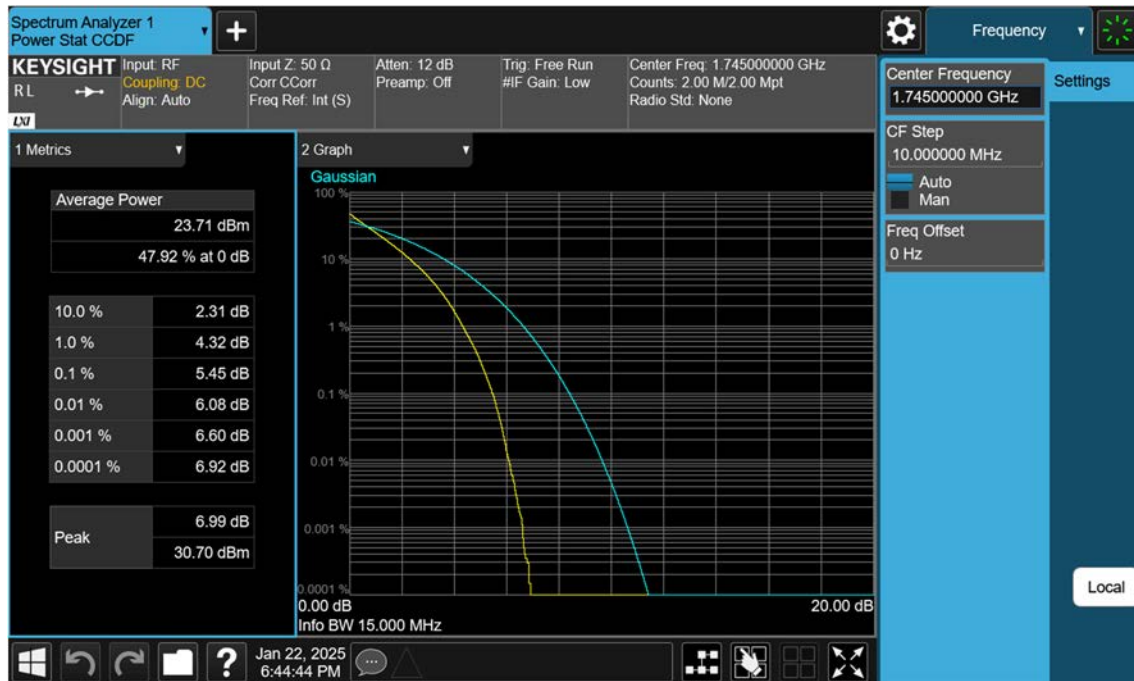


LTE B66_15 M_PAR_Mid_16QAM_FullRB

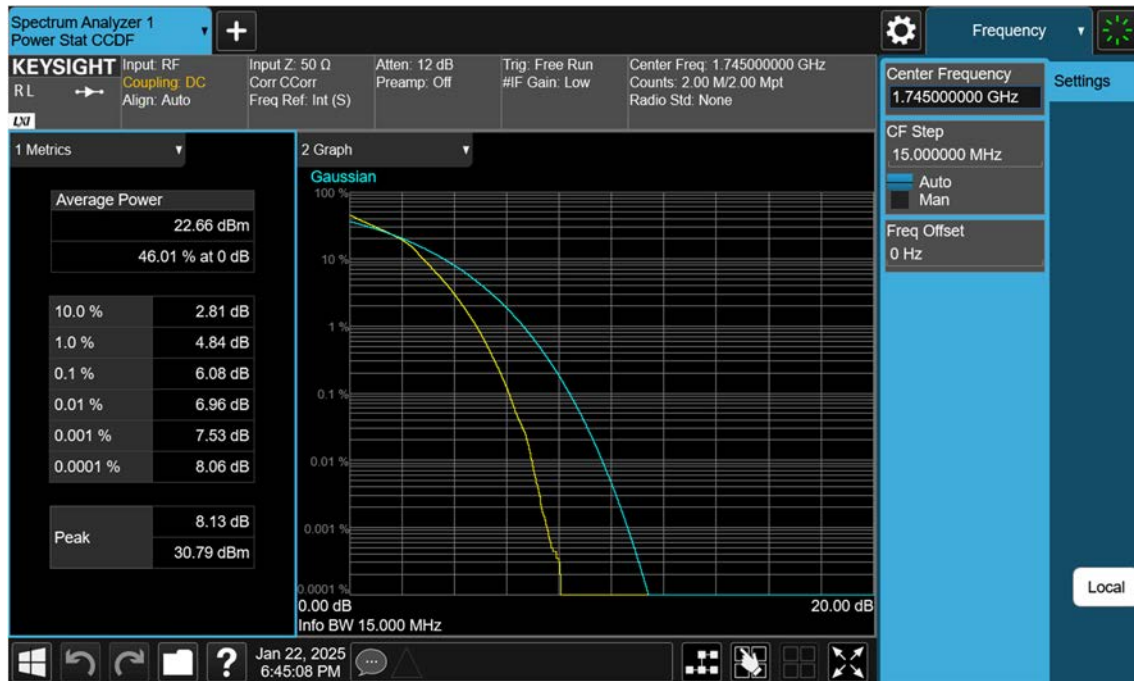


LTE B66_15 M_PAR_Mid_64QAM_FullRB

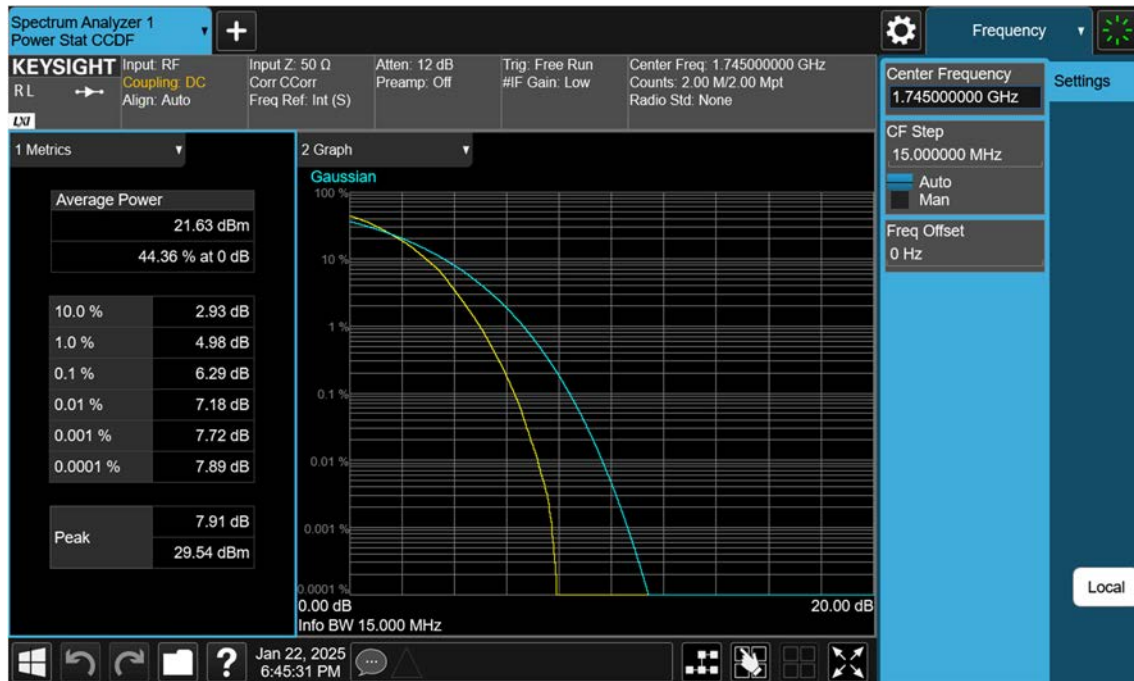


LTE B66_15 M_PAR_Mid_256QAM_FullRB

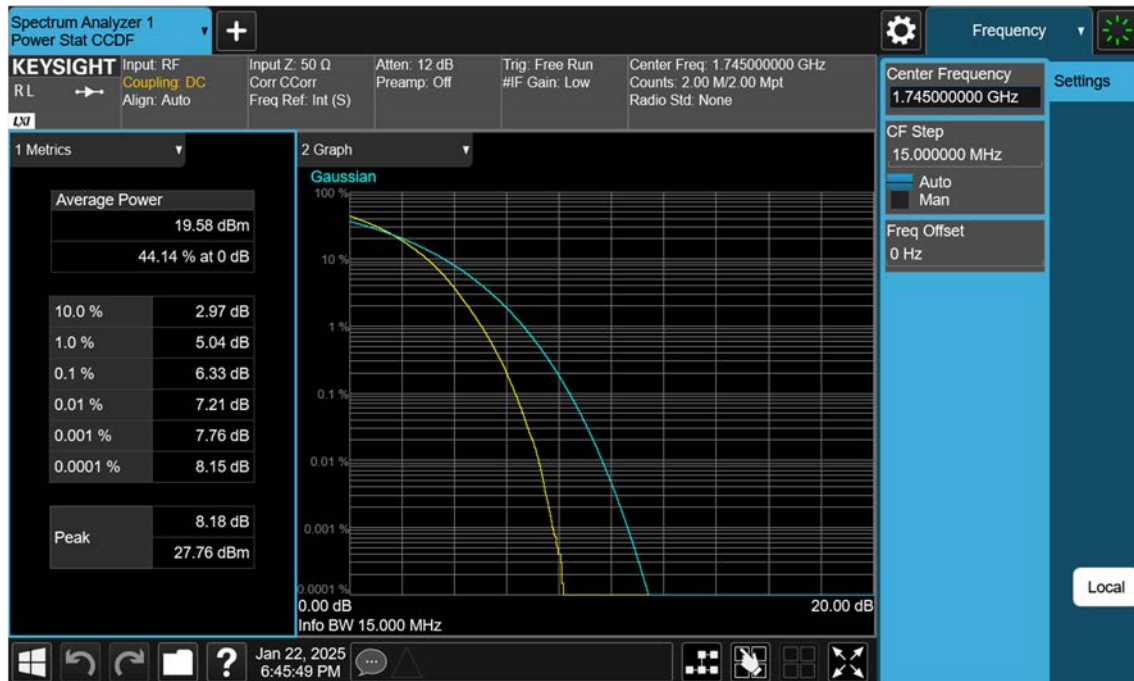


LTE B66_20 M_PAR_Mid_QPSK_FullRB

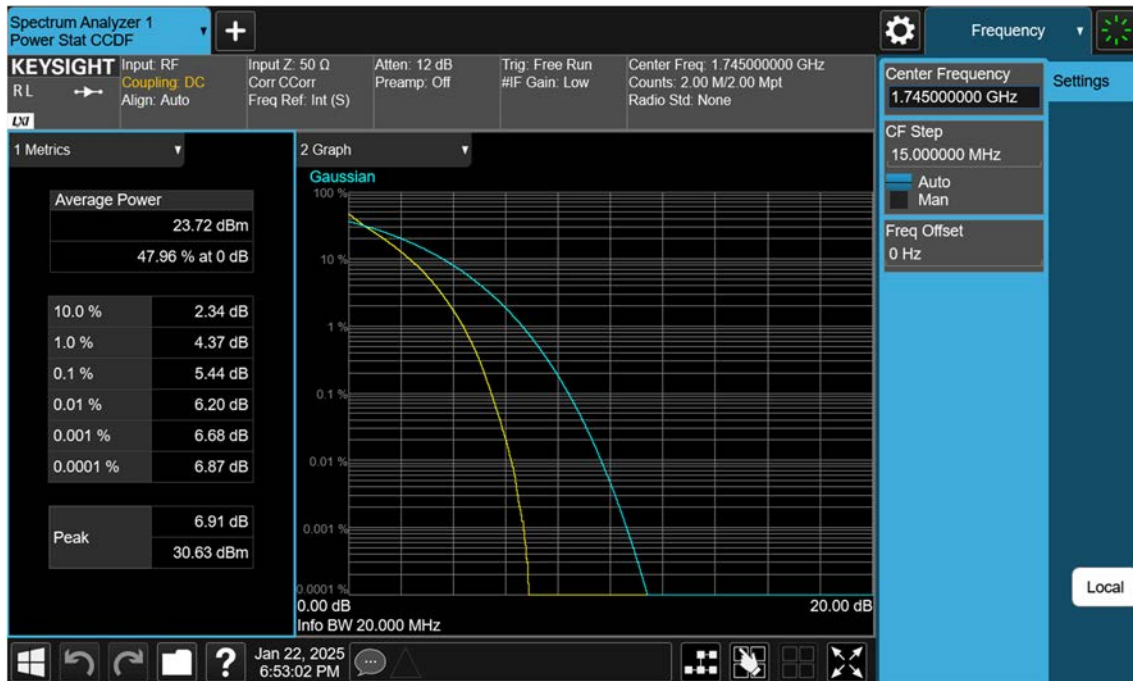


LTE B66_20 M_PAR_Mid_16QAM_FullRB

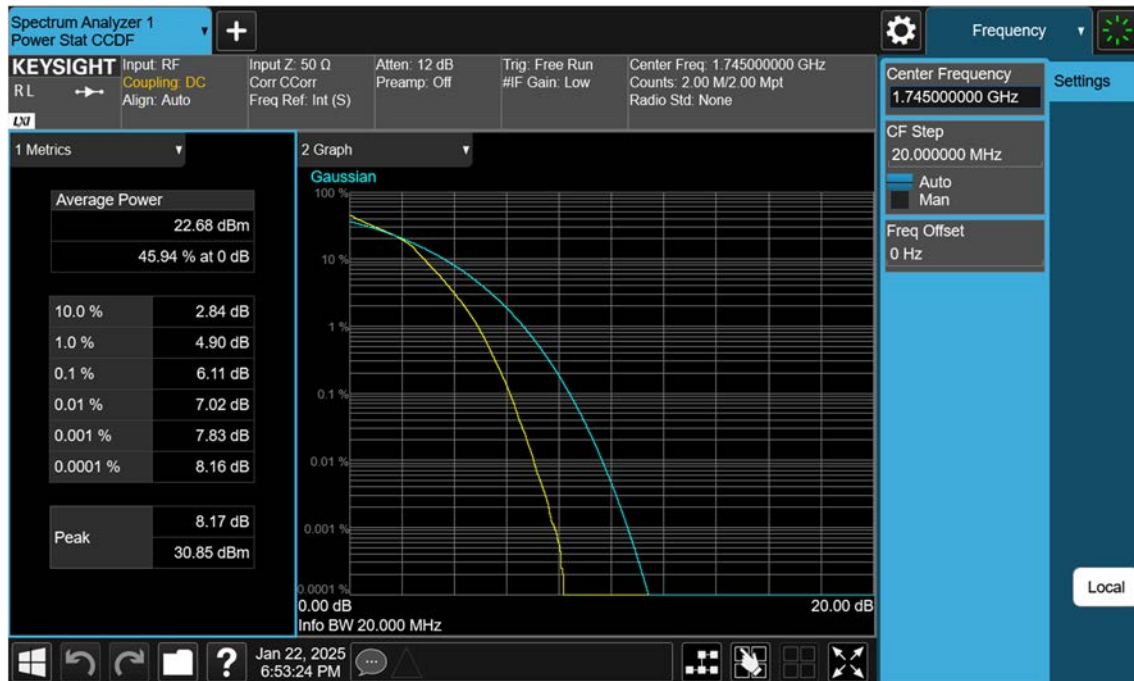


LTE B66_20 M_PAR_Mid_64QAM_FullRB

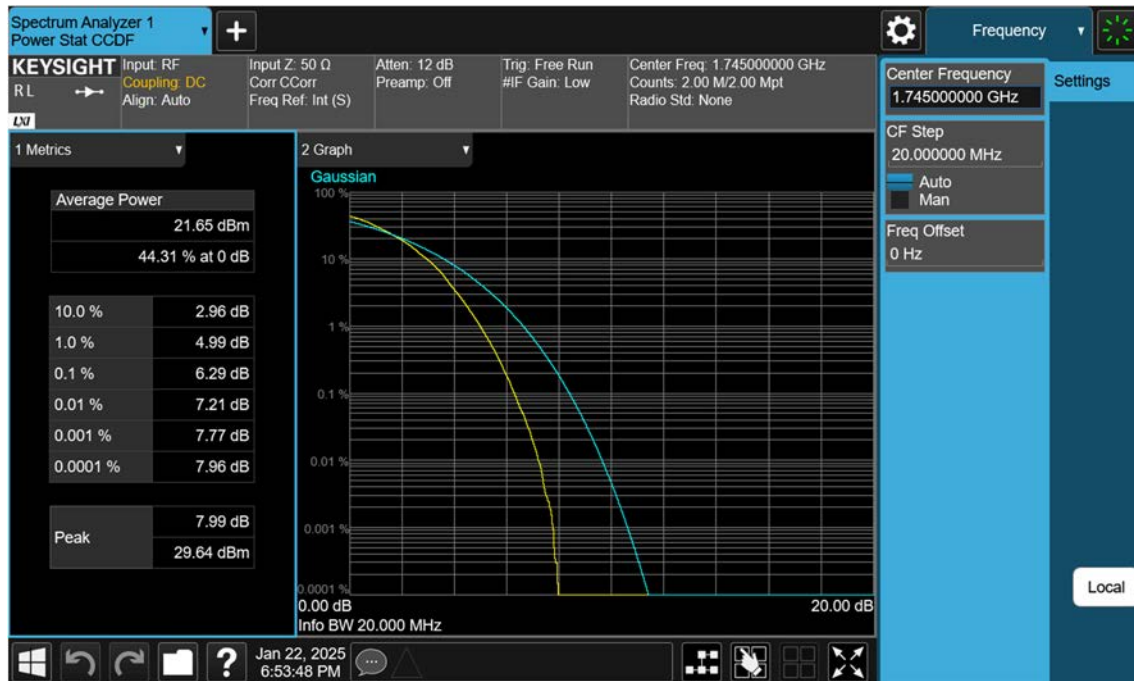


LTE B66_20 M_PAR_Mid_256QAM_FullRB

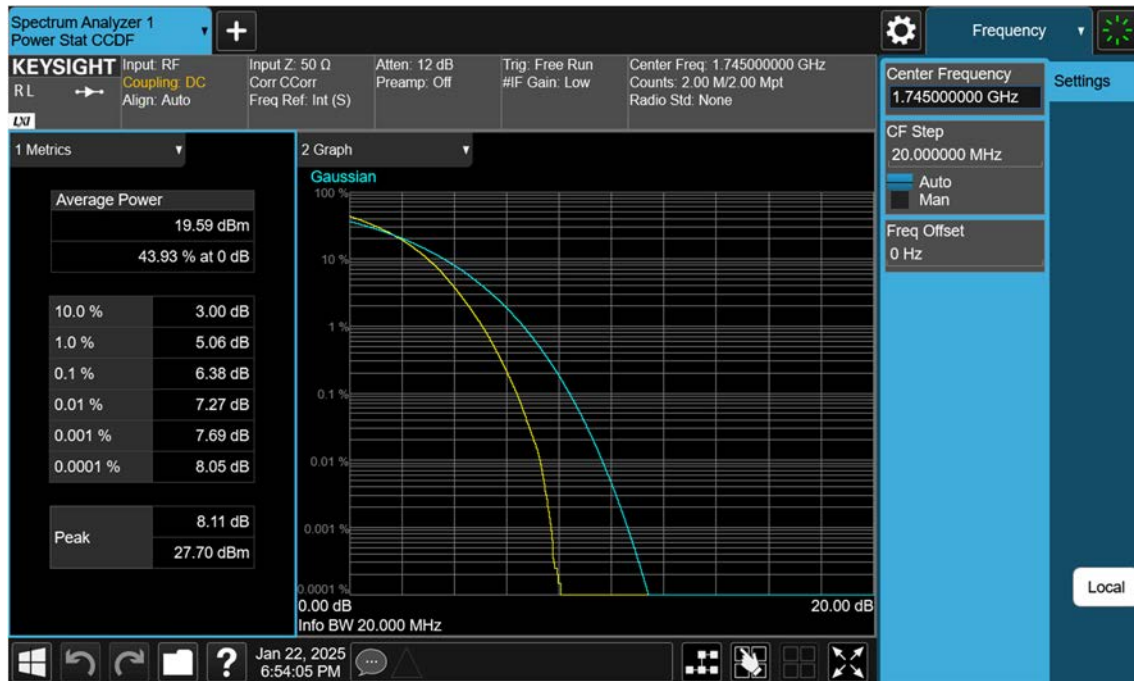


LTE B66_1.4M_OBW_Mid_QPSK_FullRB

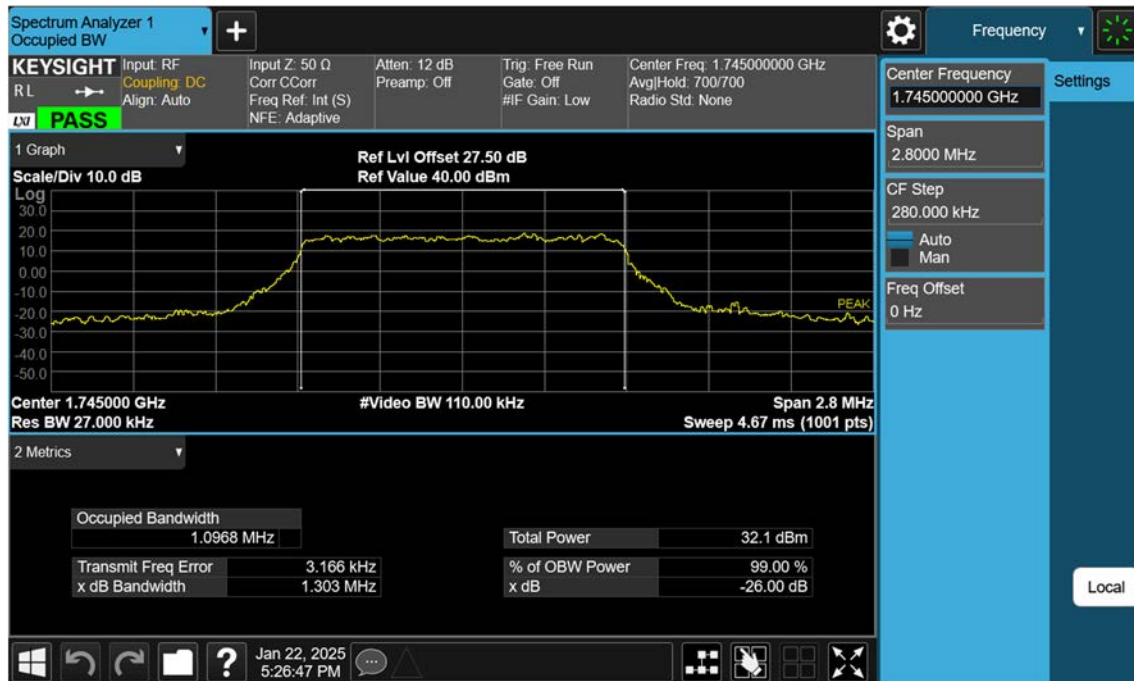


LTE B66_1.4M_OBW_Mid_16QAM_FullRB

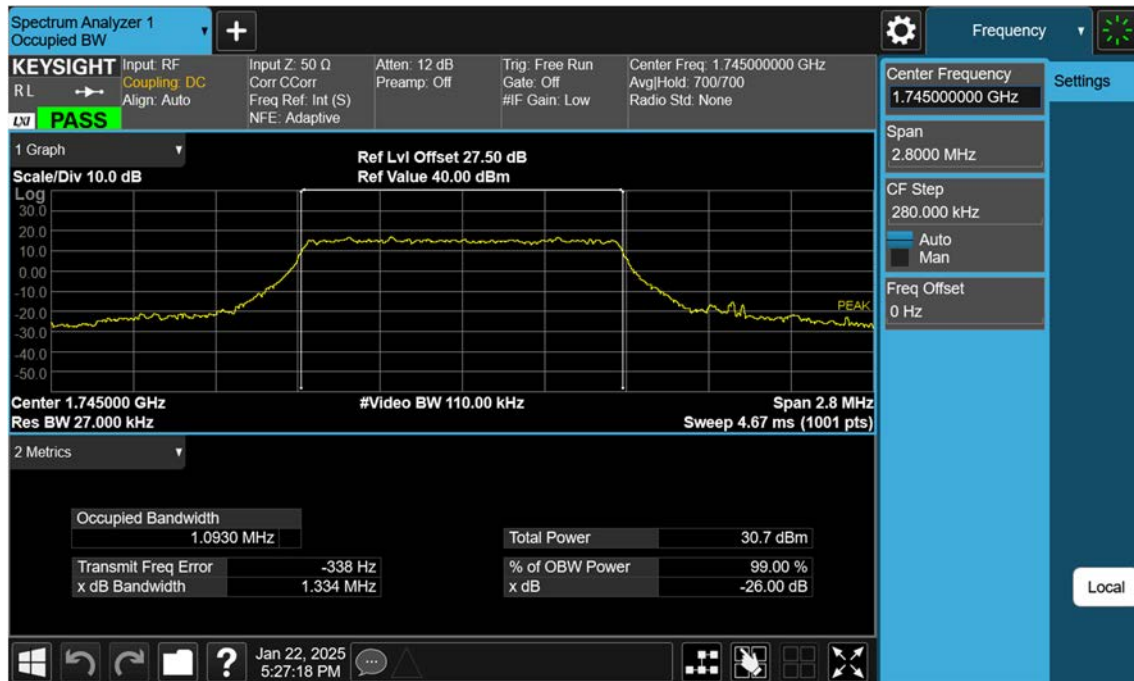


LTE B66_1.4M_OBW_Mid_64QAM_FullRB

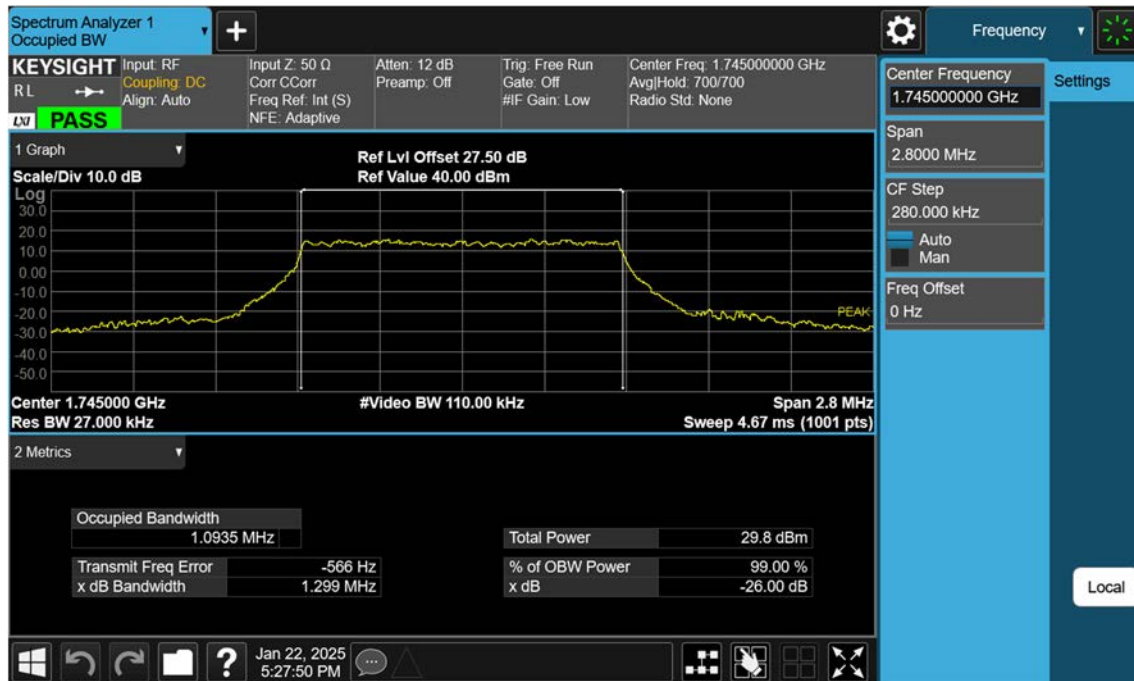


LTE B66_1.4M_OBW_Mid_256QAM_FullRB

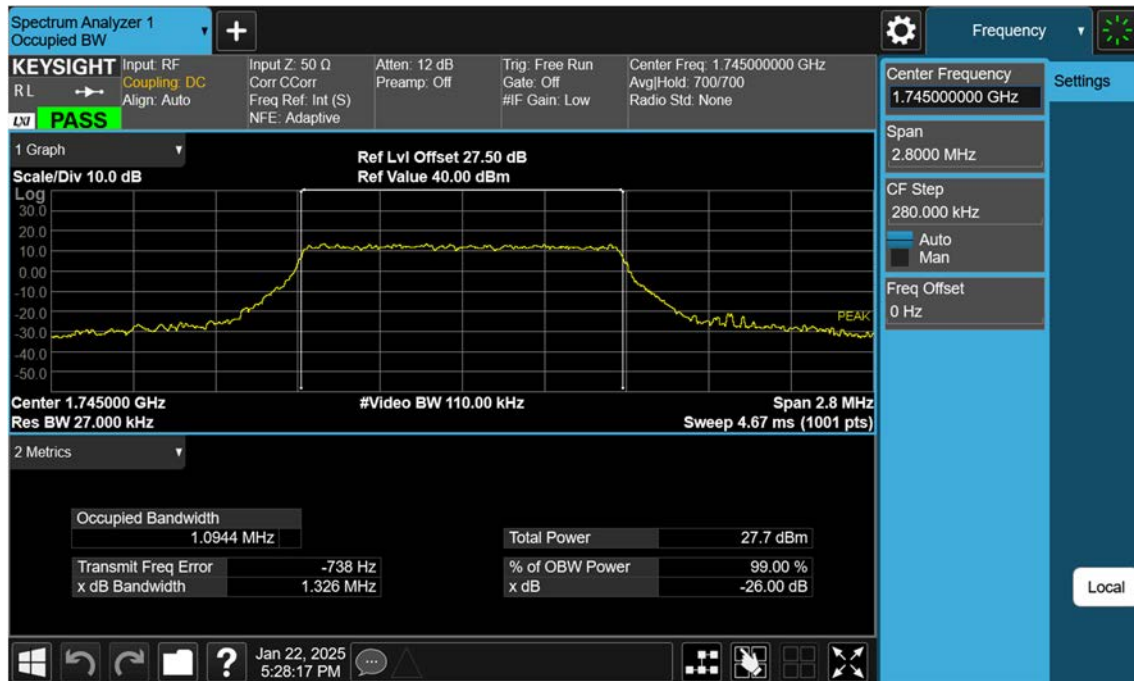


LTE B66_3 M_OBW_Mid_QPSK_FullRB

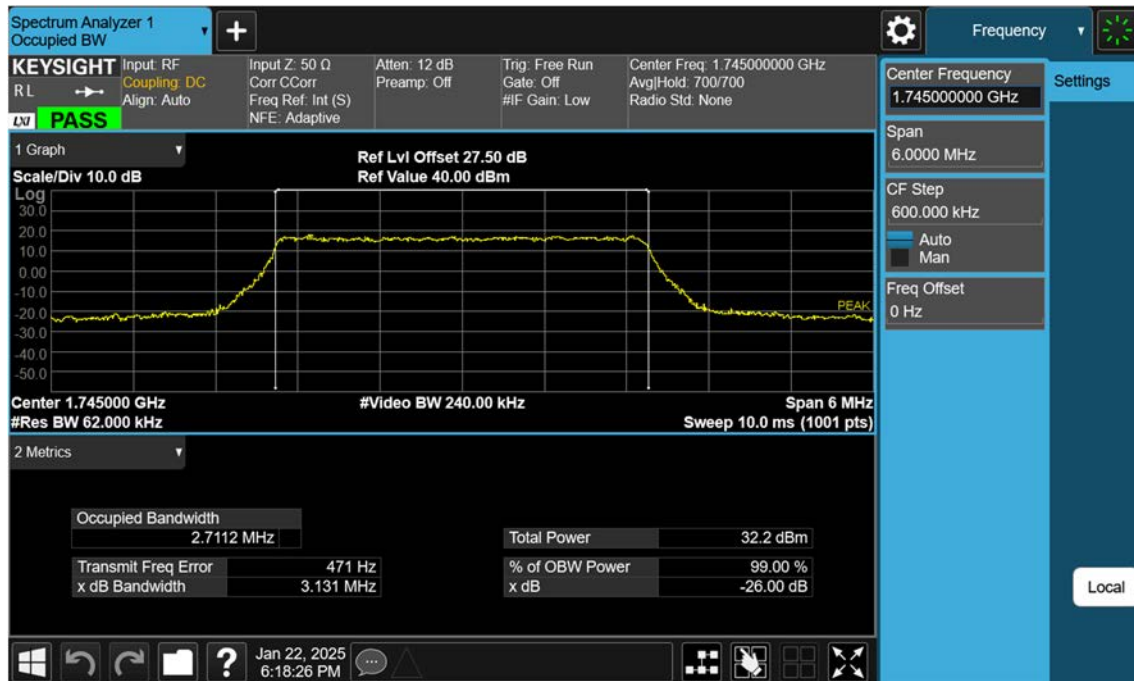


LTE B66_3 M_OBW_Mid_16QAM_FullRB

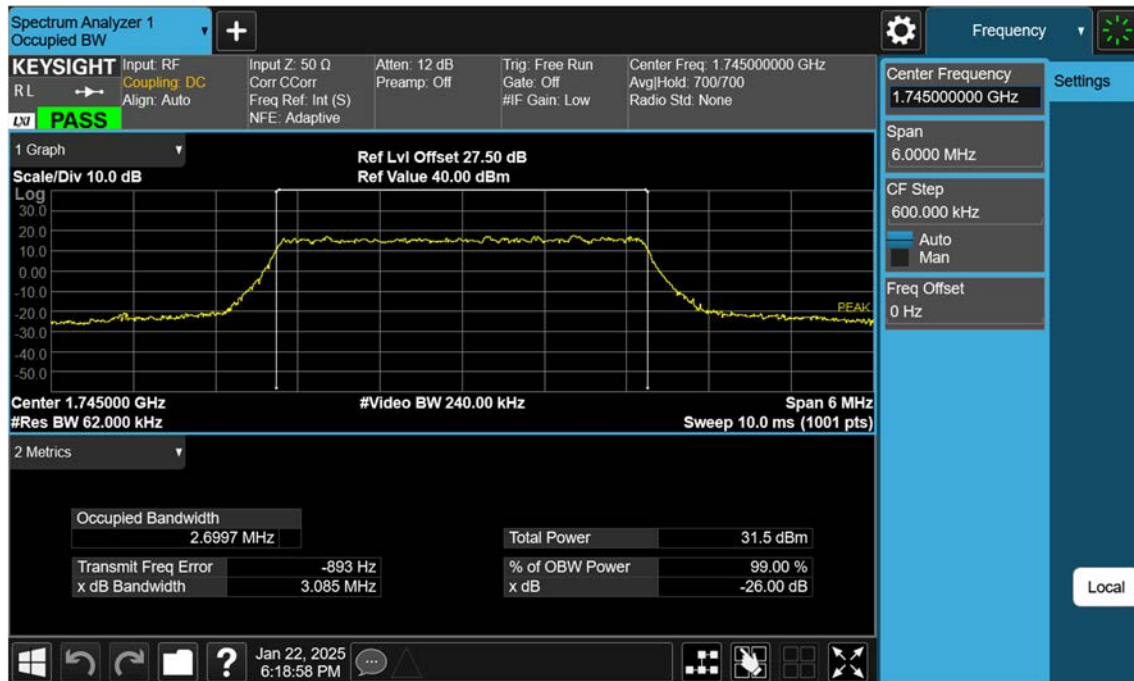


LTE B66_3 M_OBW_Mid_64QAM_FullRB

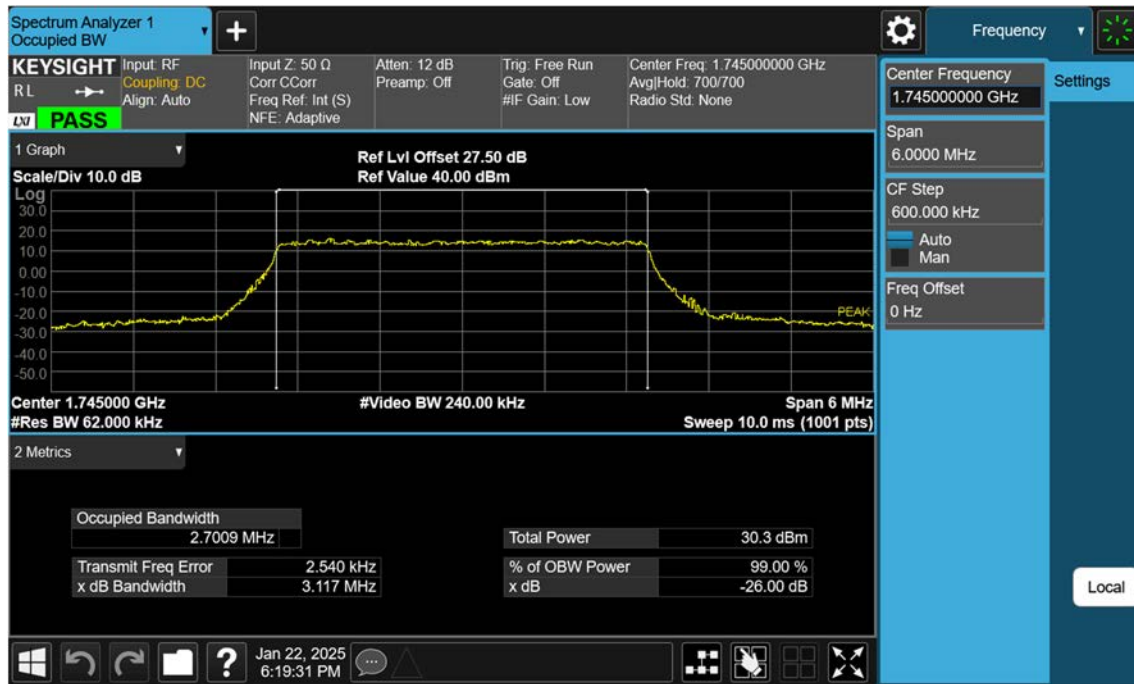


LTE B66_3 M_OBW_Mid_256QAM_FullIRB

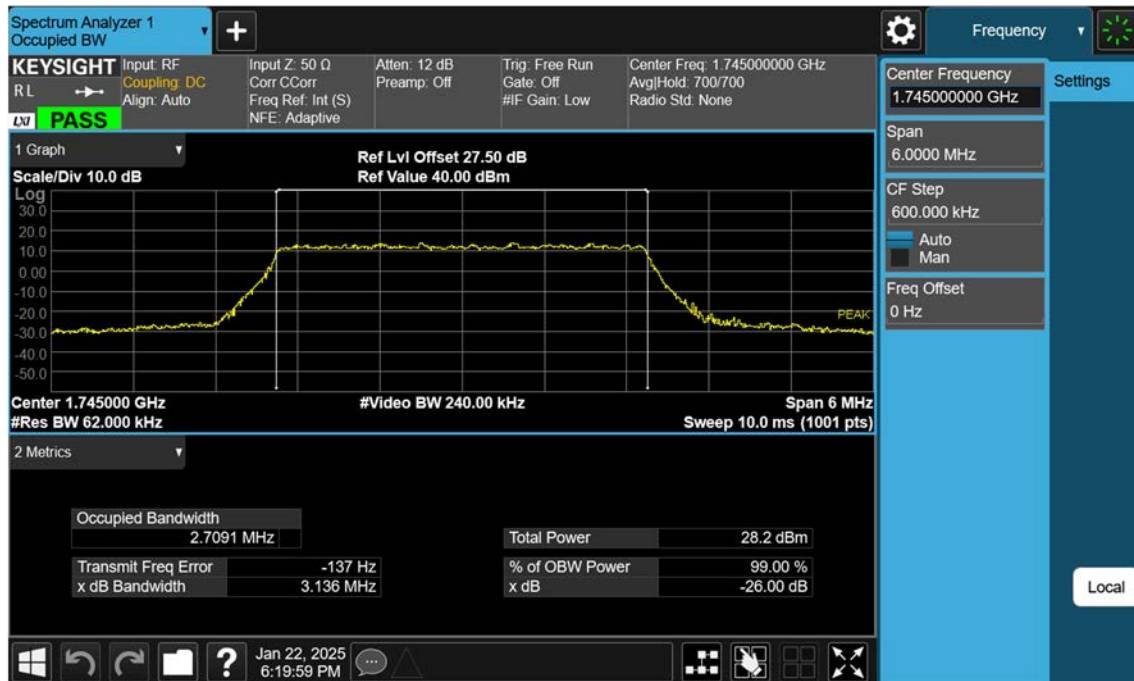


LTE B66_5 M_OBW_Mid_QPSK_FullRB

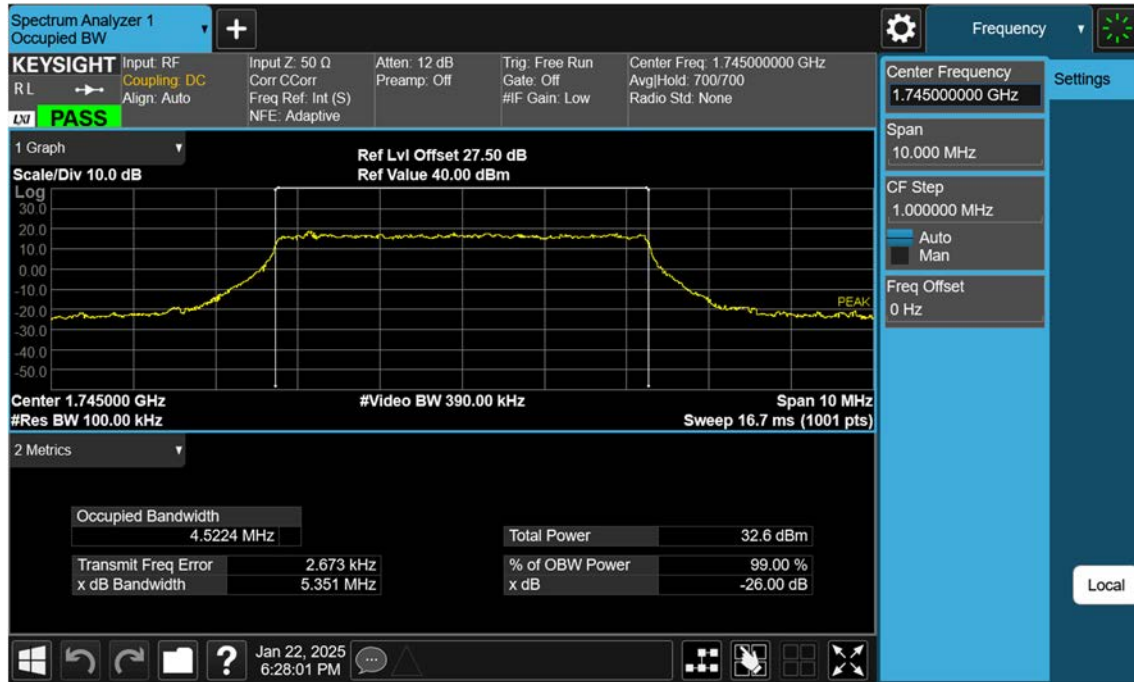


LTE B66_5 M_OBW_Mid_16QAM_FullRB

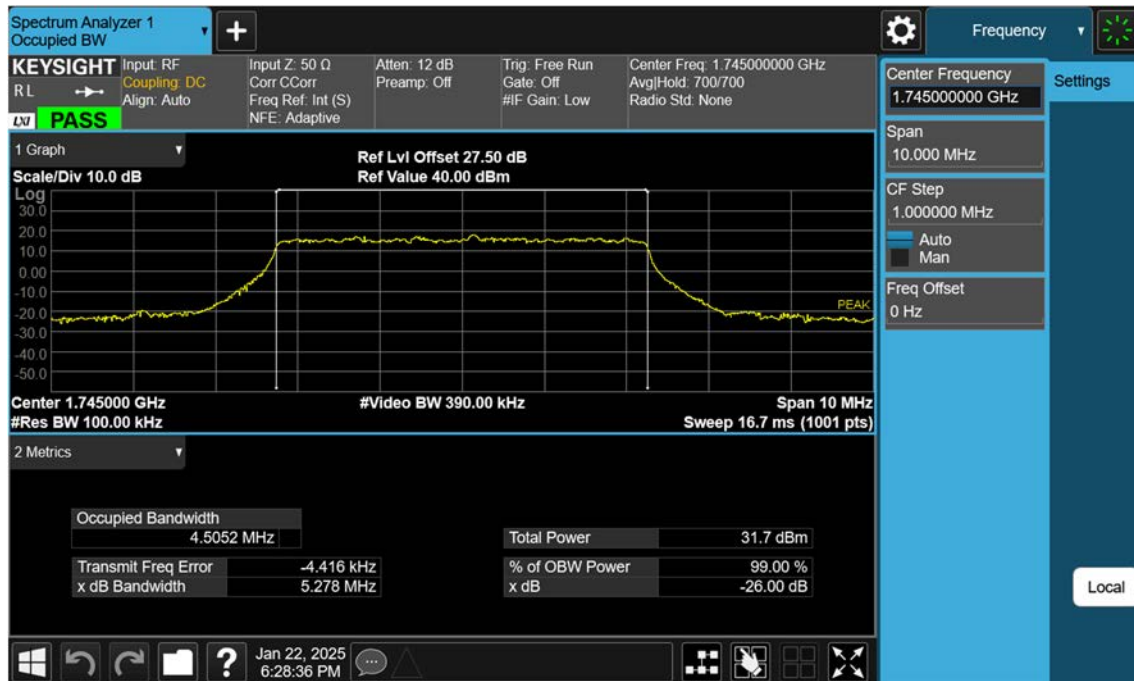


LTE B66_5 M_OBW_Mid_64QAM_FullRB

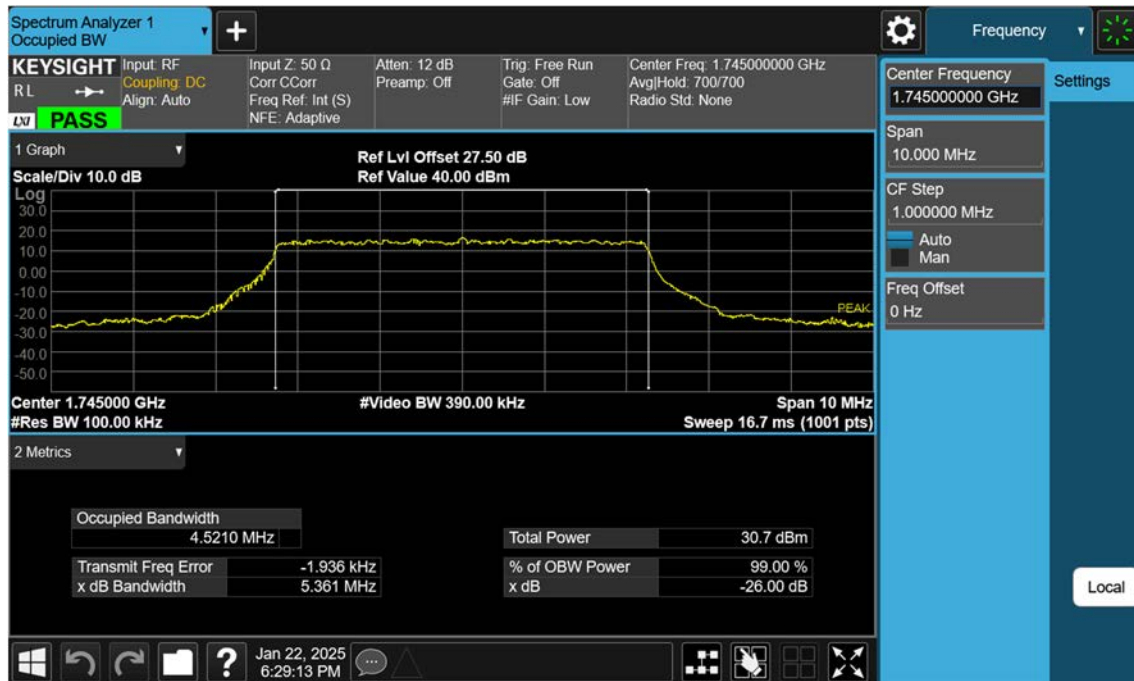


LTE B66_5 M_OBW_Mid_256QAM_FullIRB

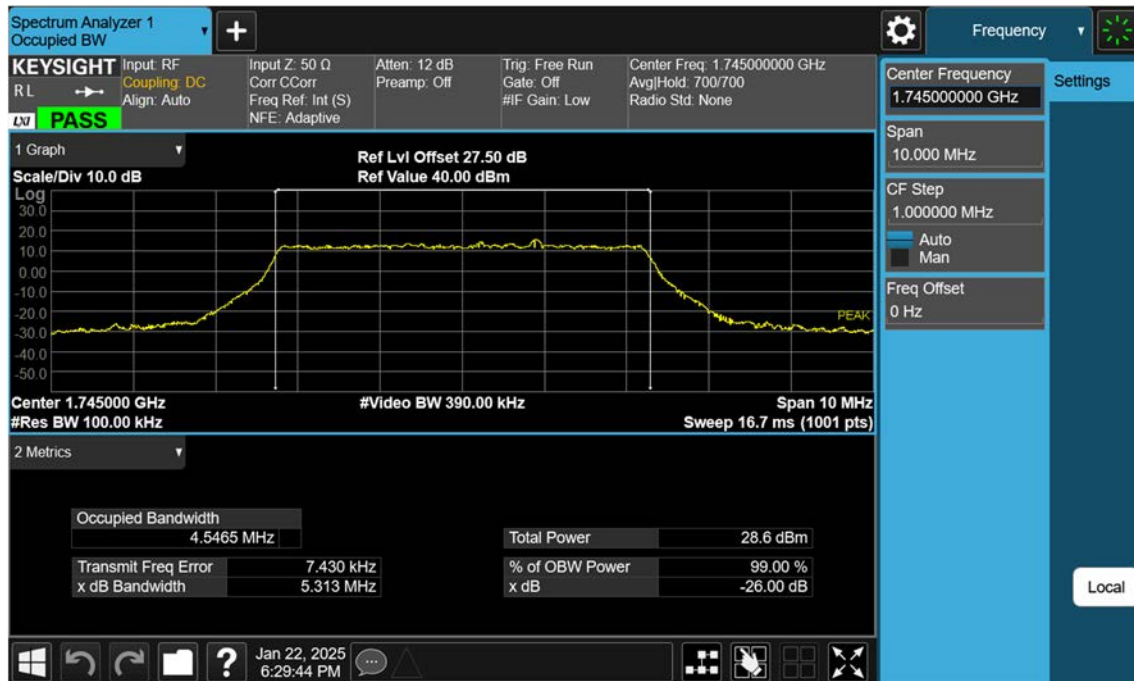


LTE B66_10 M_OBW_Mid_QPSK_FullIRB

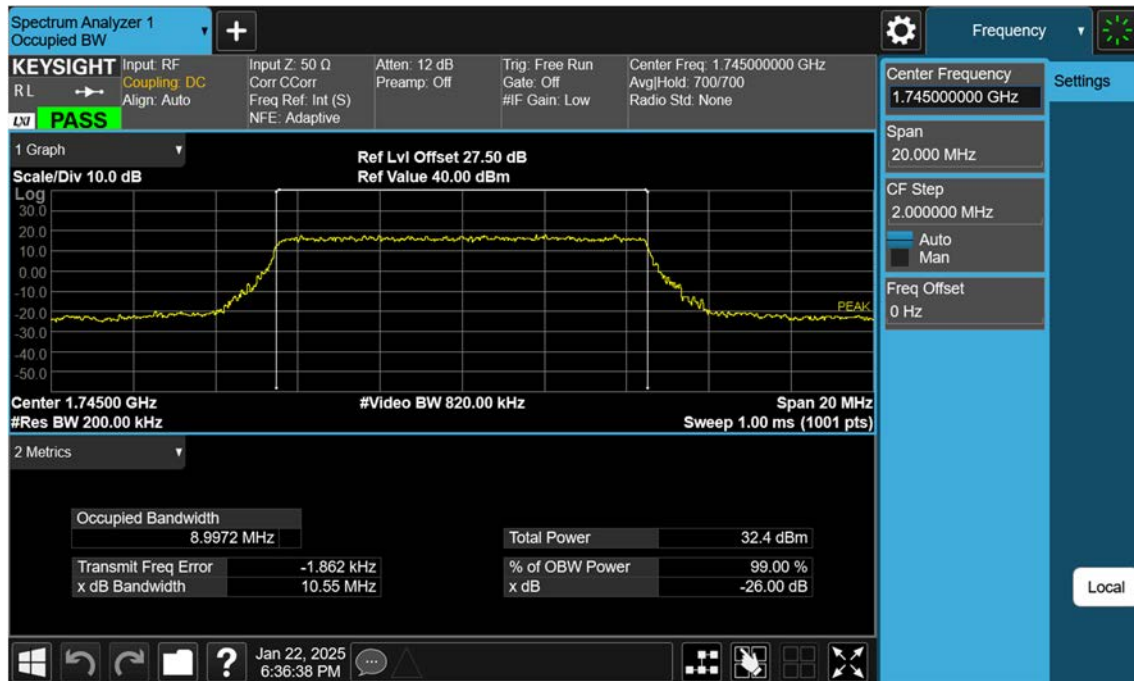


LTE B66_10 M_OBW_Mid_16QAM_FullIRB

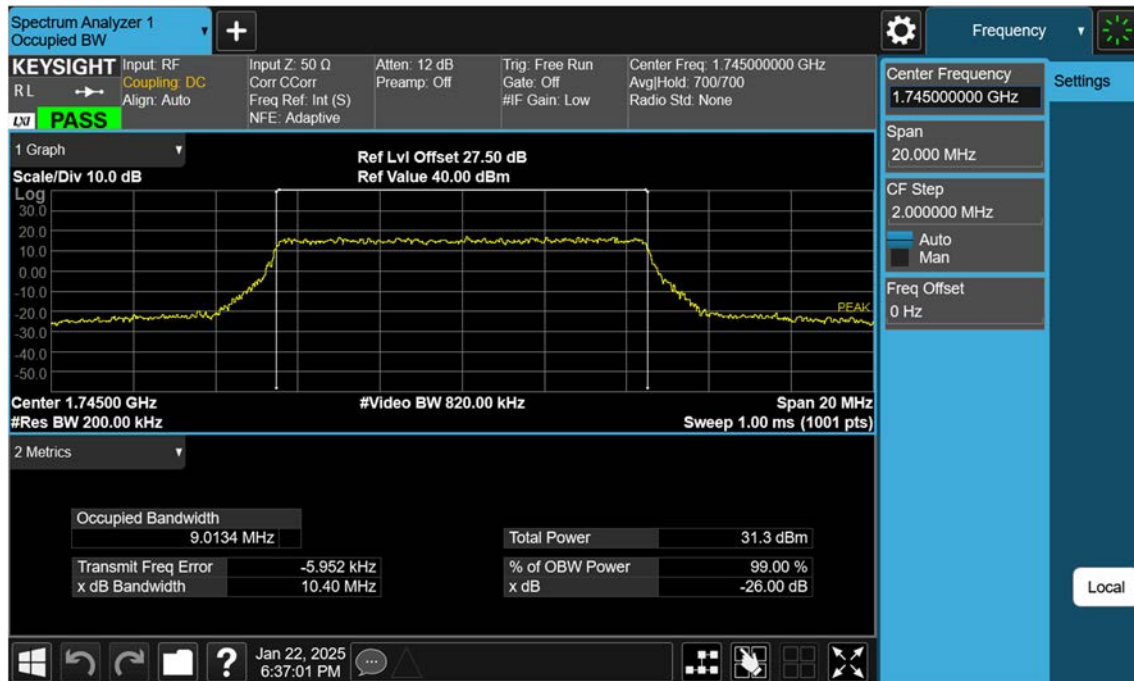


LTE B66_10 M_OBW_Mid_64QAM_FullRB

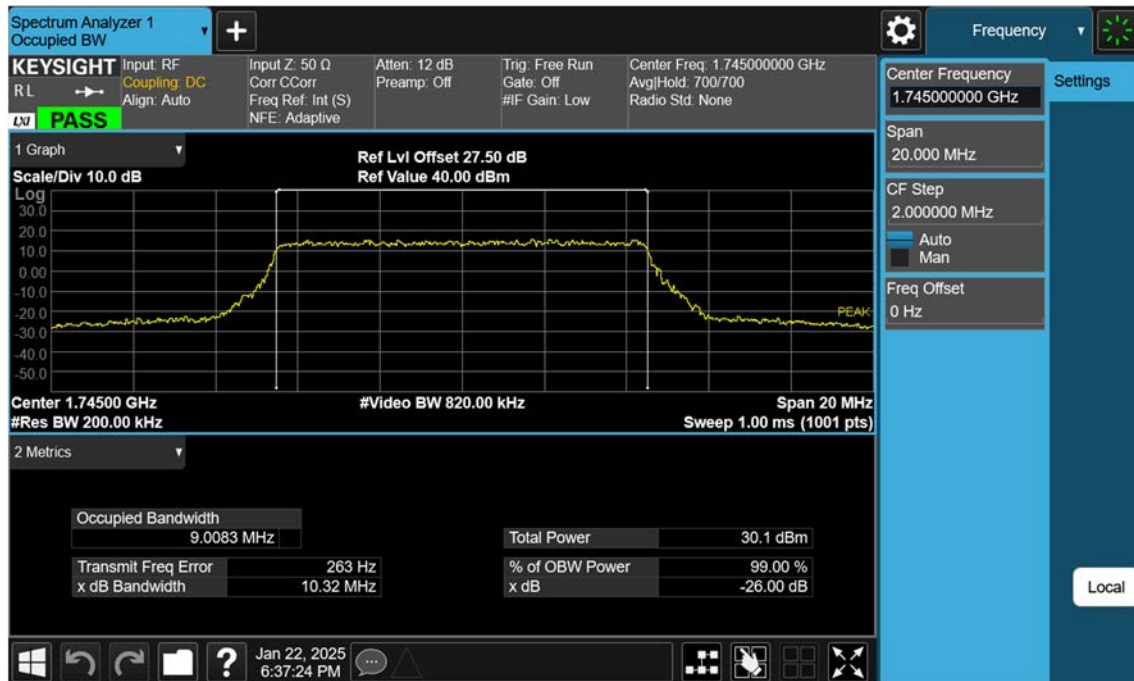


LTE B66_10 M_OBW_Mid_256QAM_FullRB

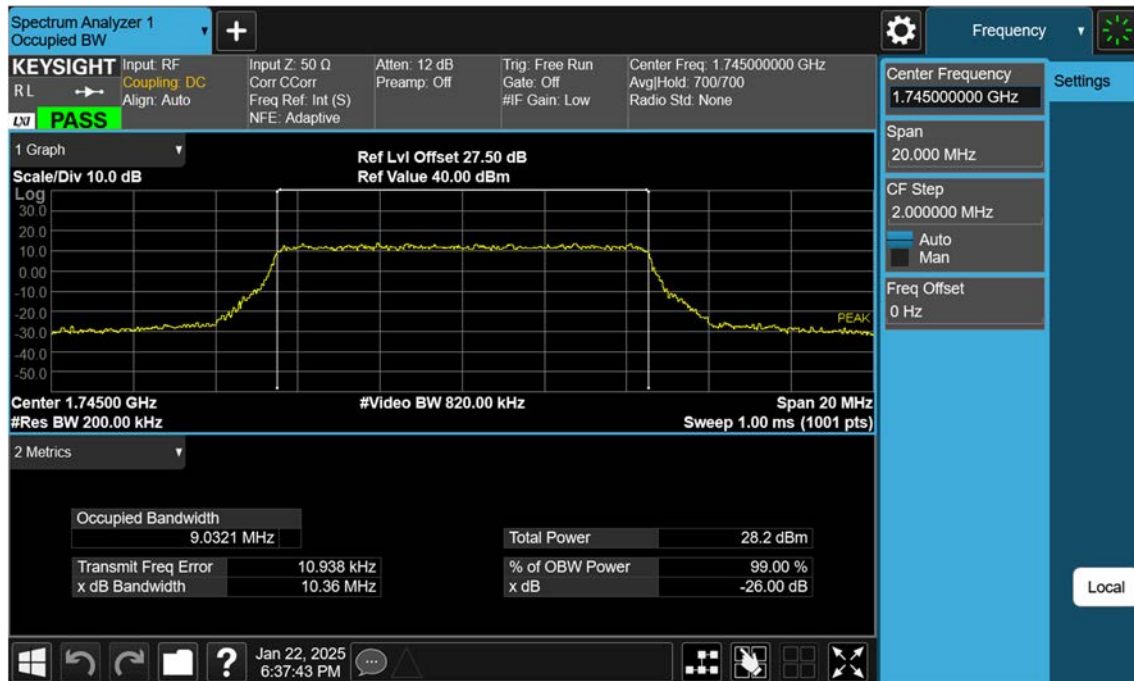


LTE B66_15 M_OBW_Mid_QPSK_FullIRB

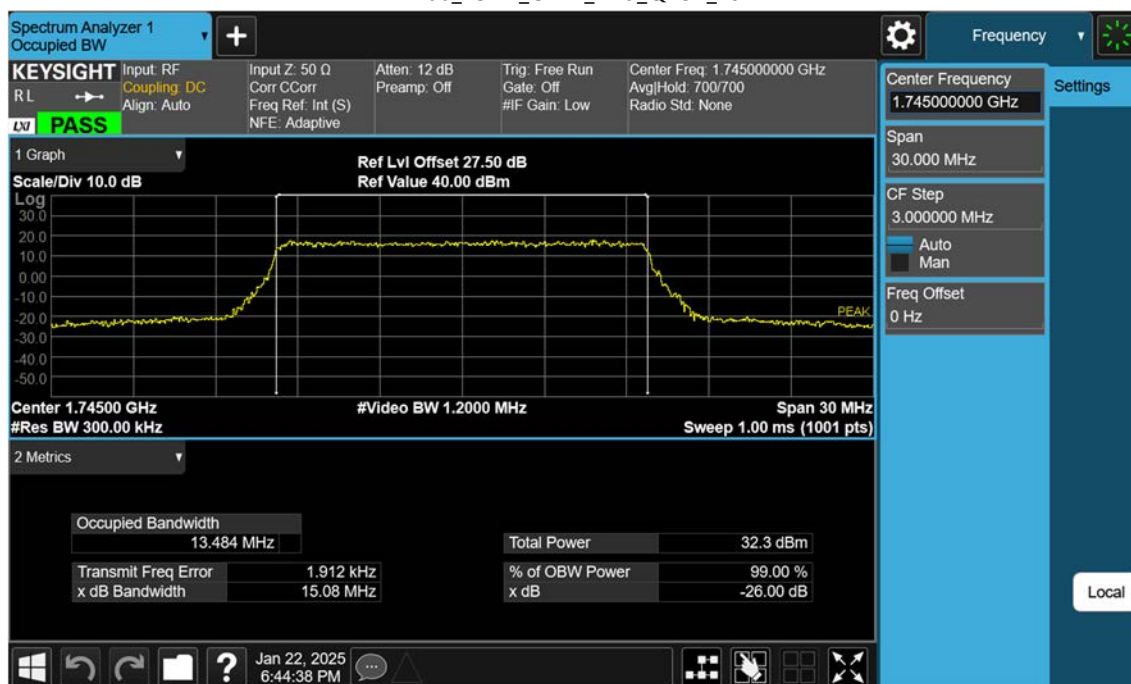


LTE B66_15 M_OBW_Mid_16QAM_FullIRB

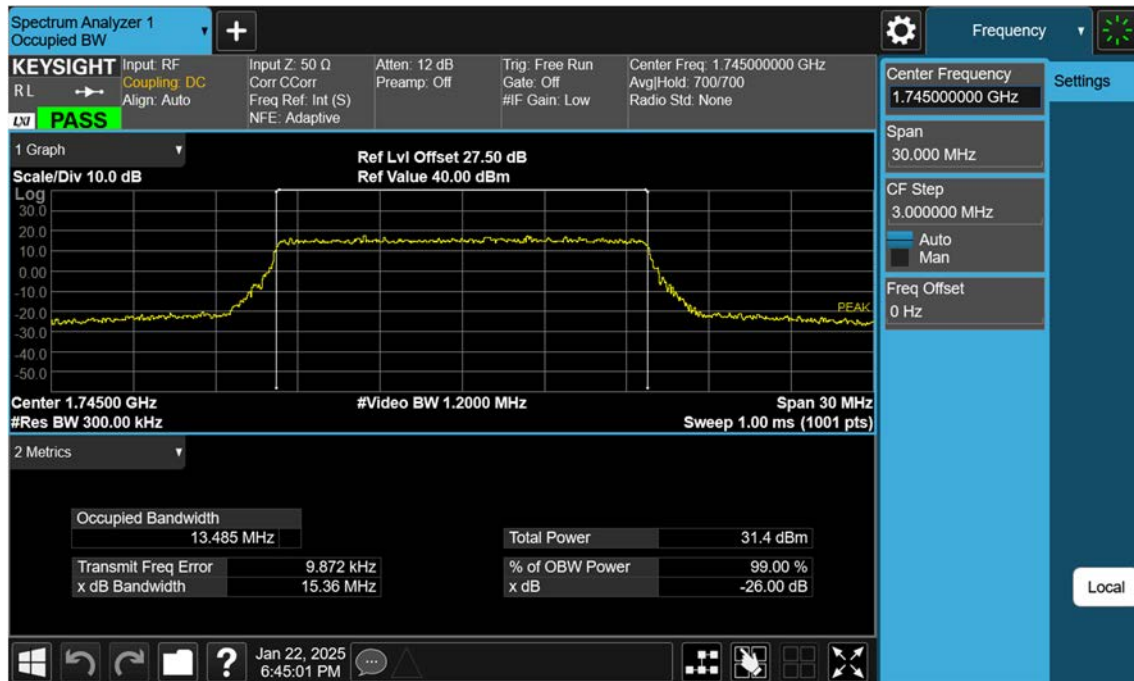


LTE B66_15 M_OBW_Mid_64QAM_FullRB

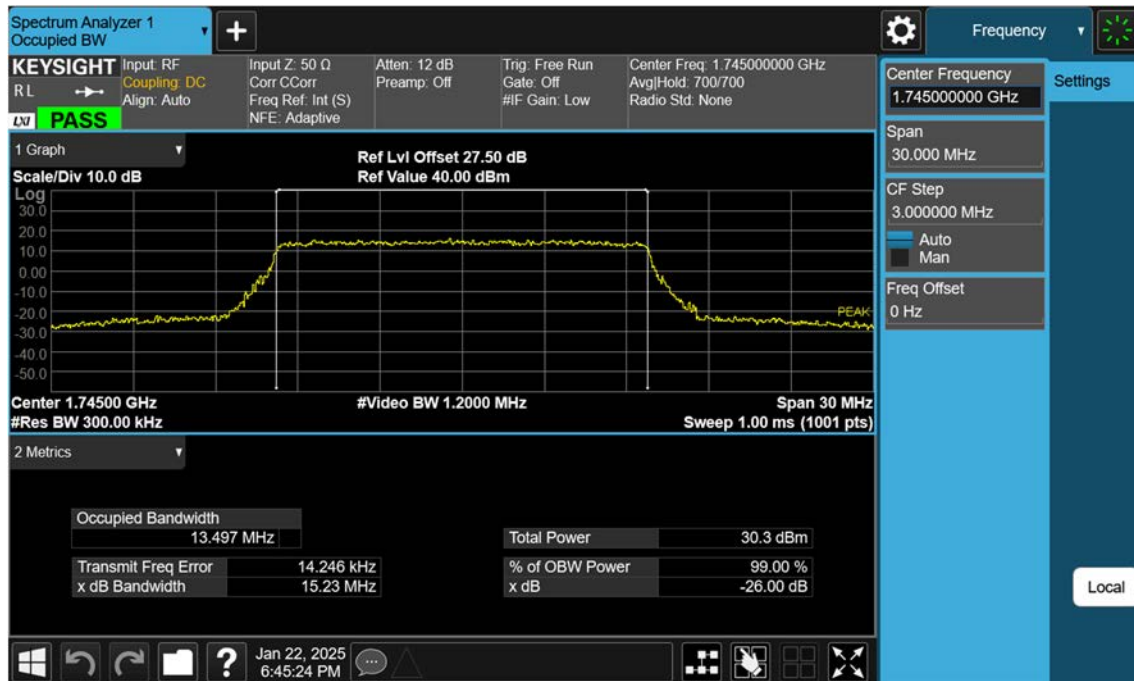


LTE B66_15 M_OBW_Mid_256QAM_FullRB

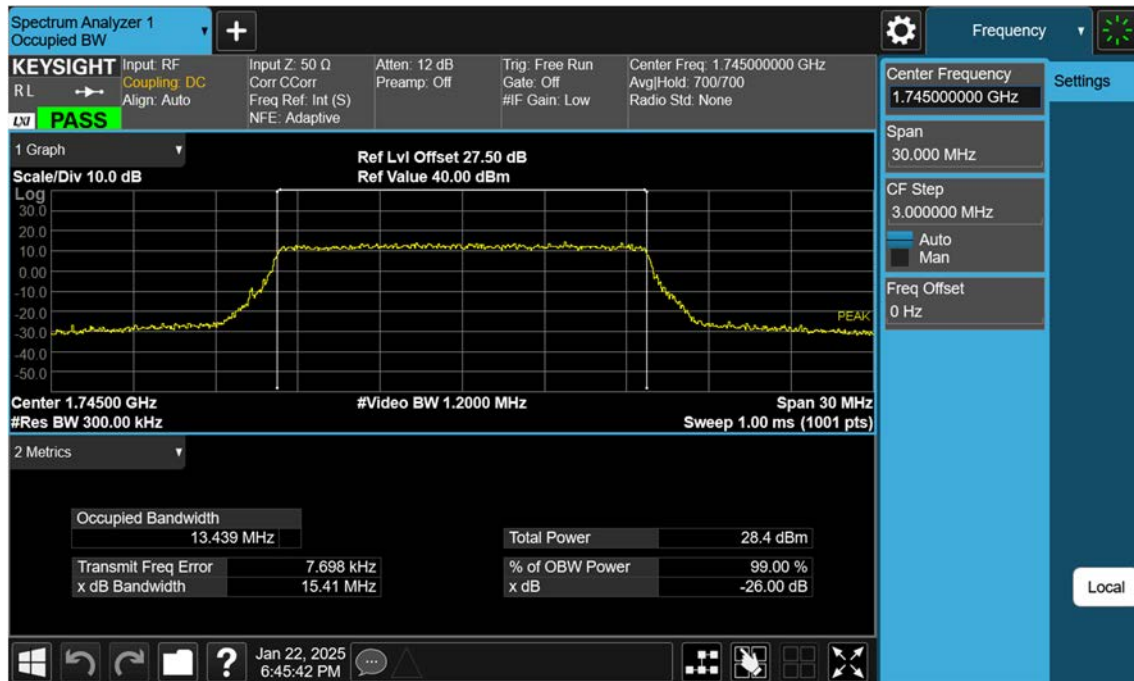


LTE B66_20 M_OBW_Mid_QPSK_FullIRB

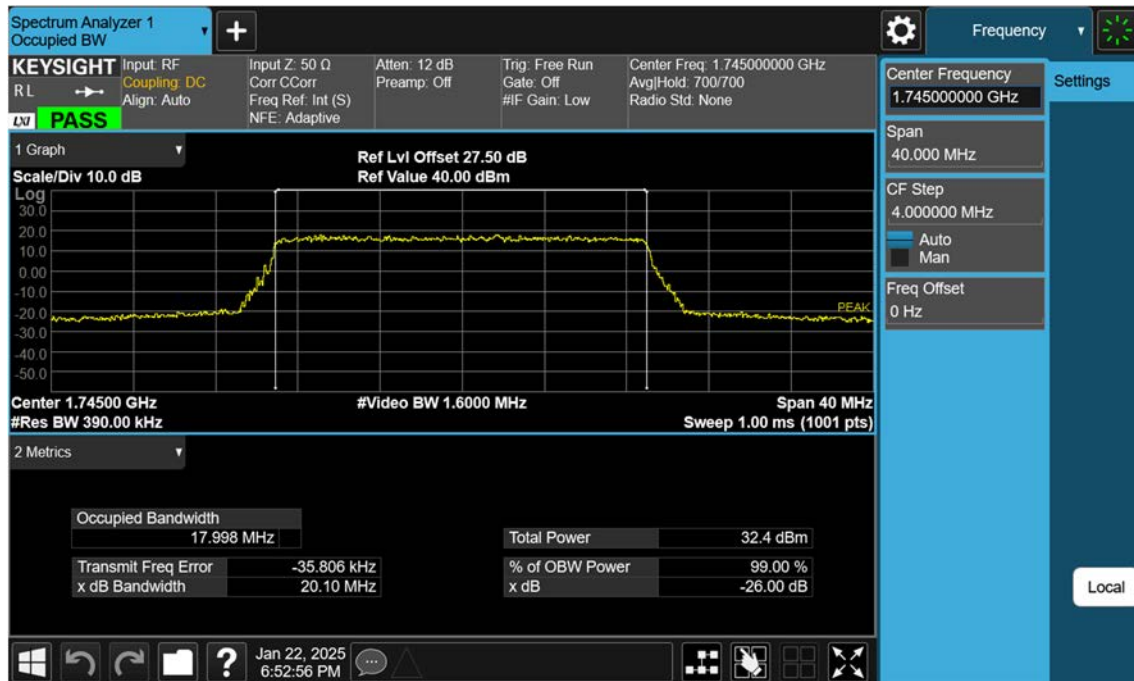


LTE B66_20 M_OBW_Mid_16QAM_FullIRB

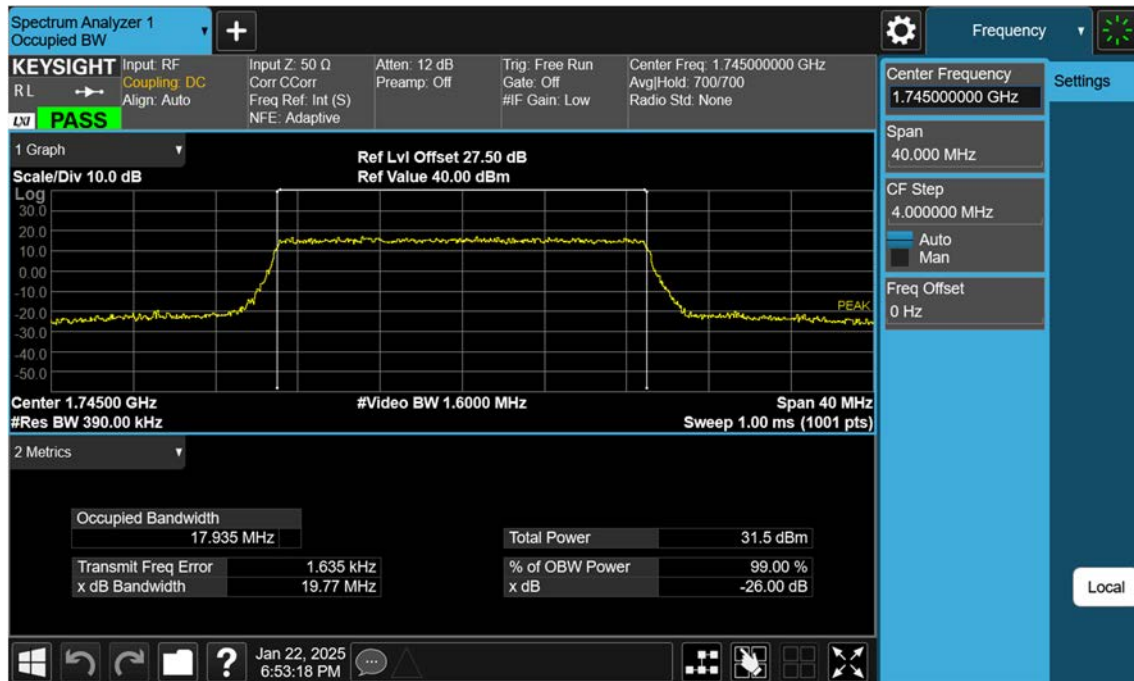


LTE B66_20 M_OBW_Mid_64QAM_FullRB

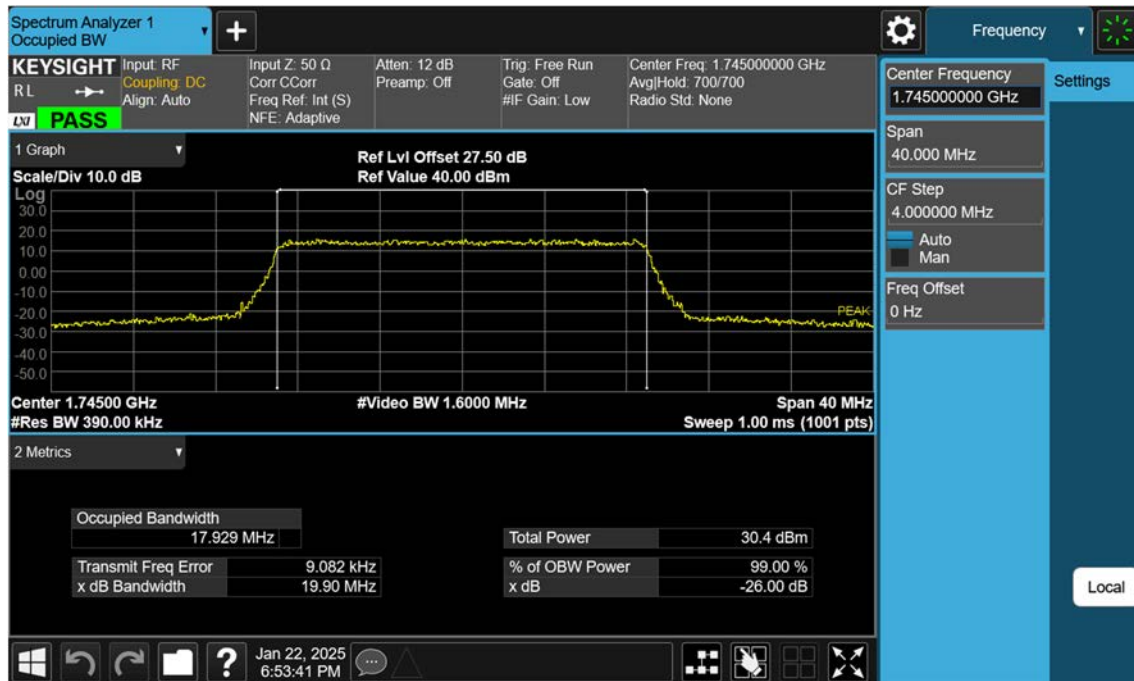

LTE B66_20 M_OBW_Mid_256QAM_FullRB

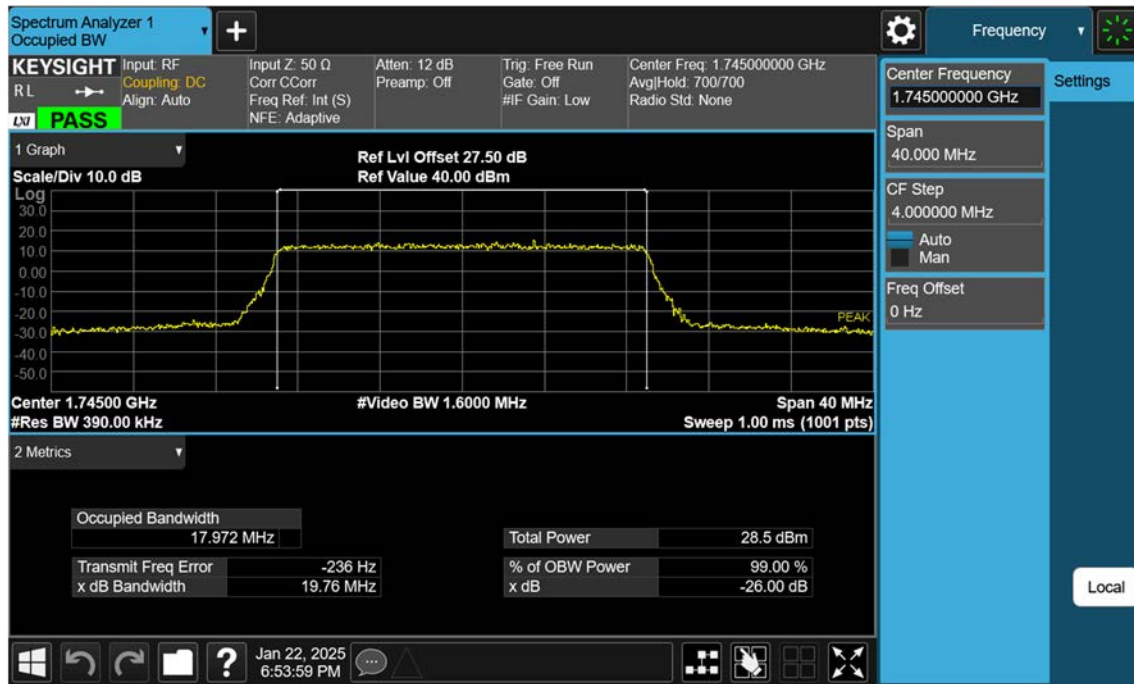


LTE B66_1.4M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

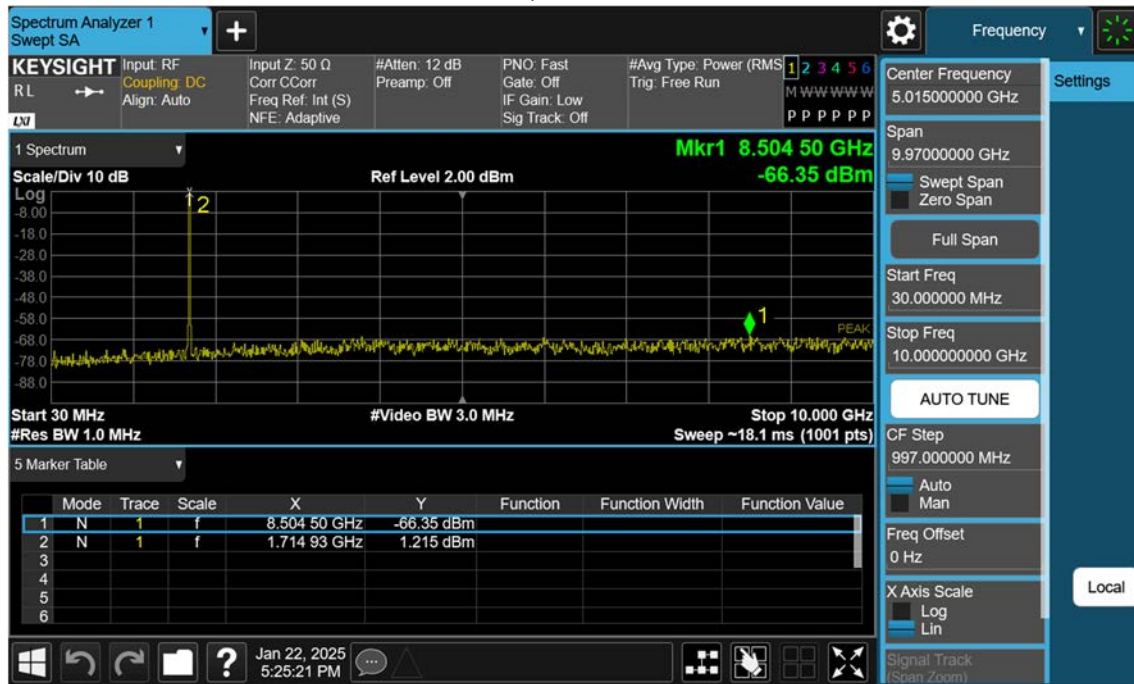


LTE B66_1.4M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB




LTE B66_1.4M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

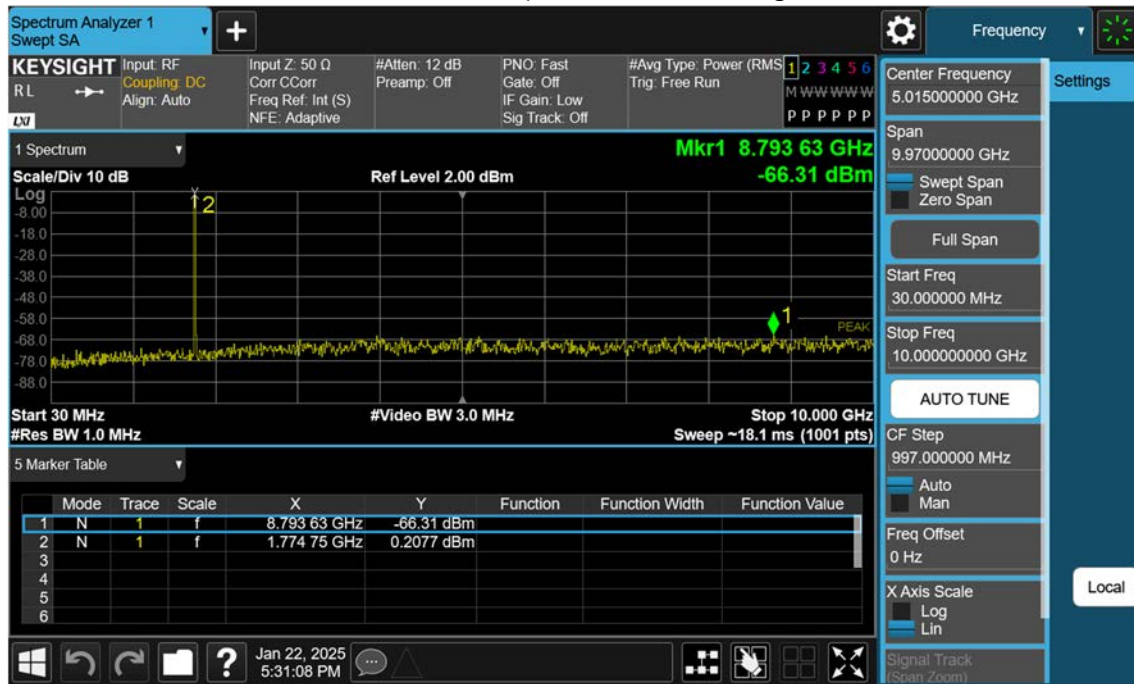


LTE B66_3 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

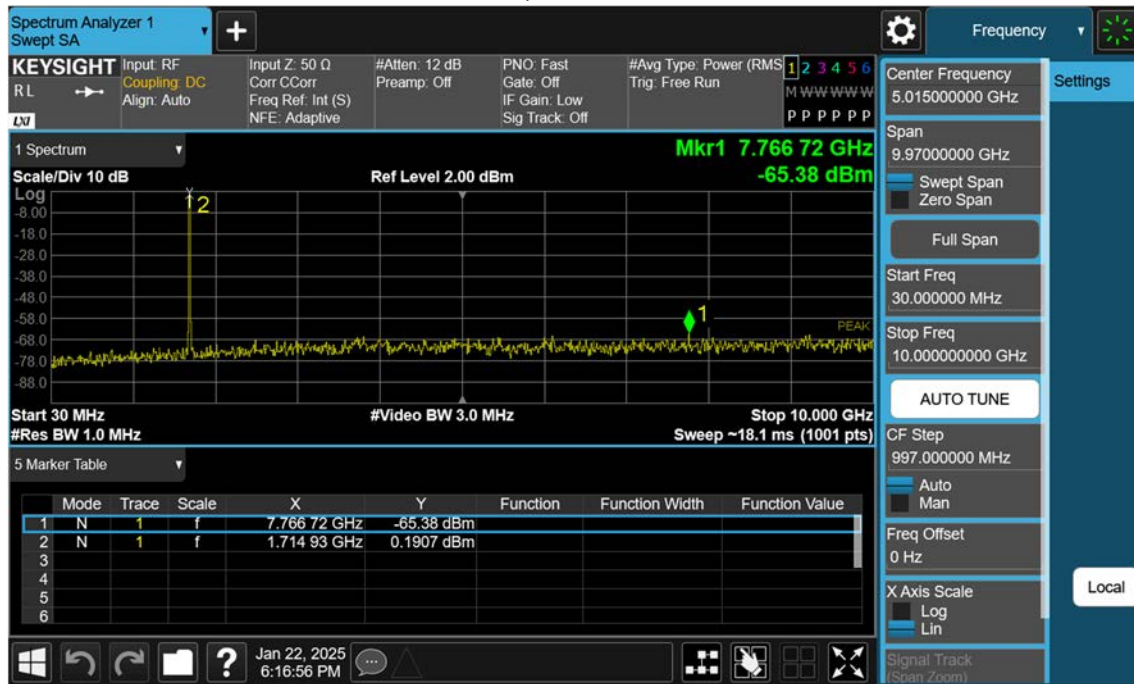


LTE B66_3 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

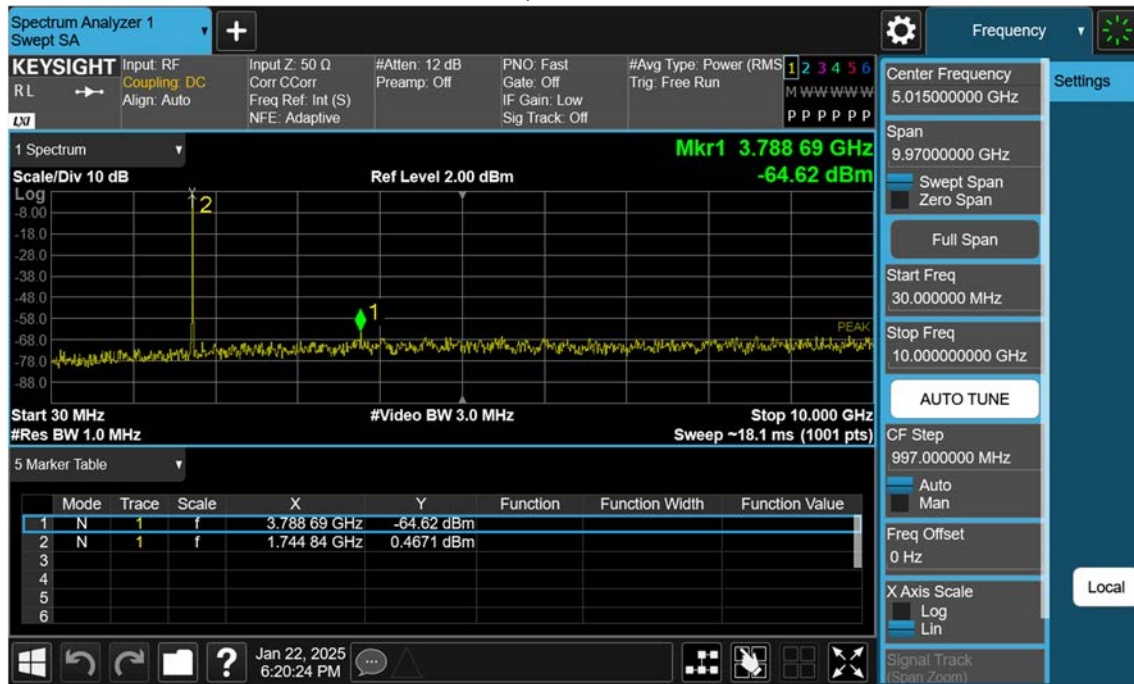

LTE B66_3 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

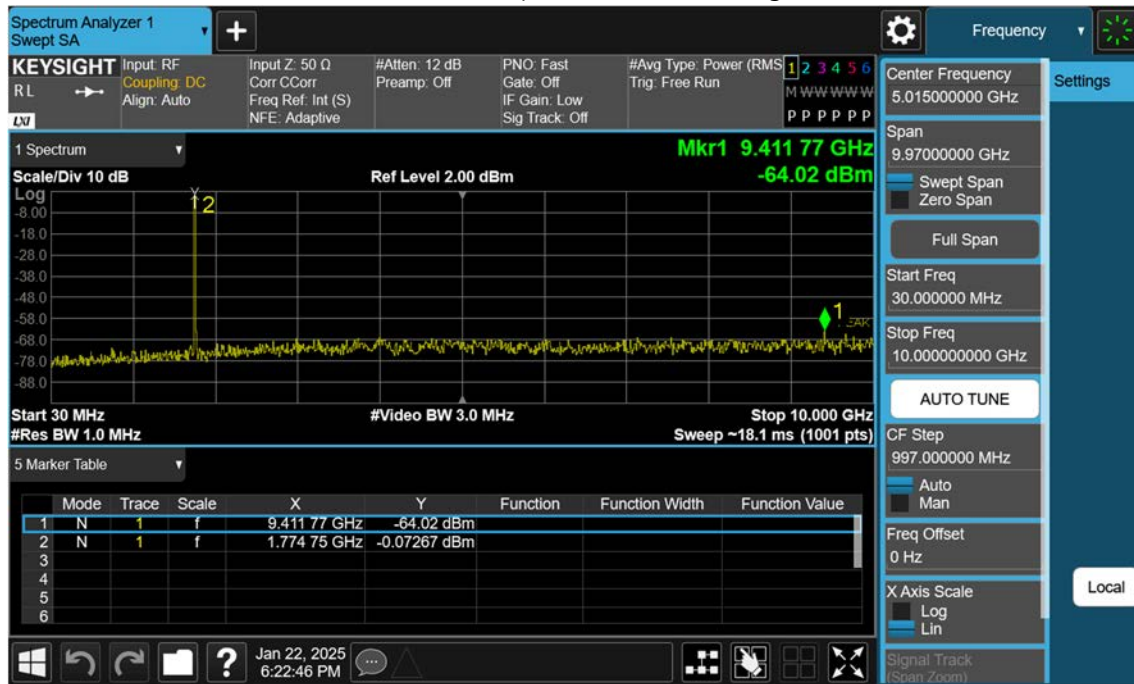


LTE B66_5 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

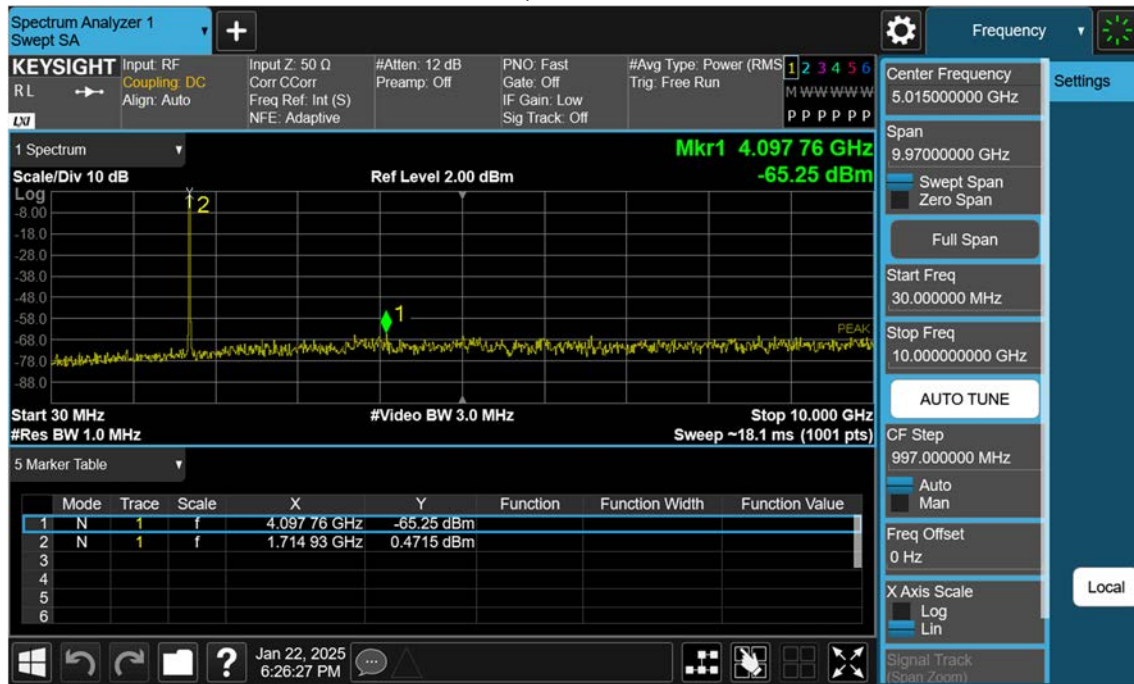


LTE B66_5 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB




LTE B66_5 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

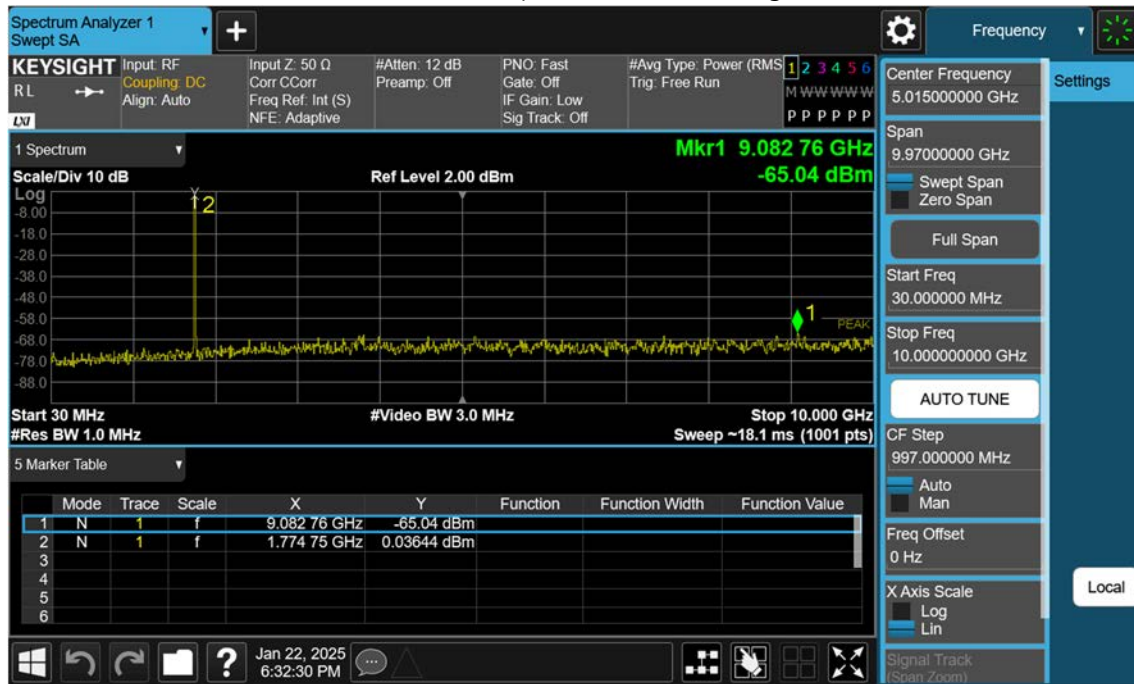

LTE B66_10 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

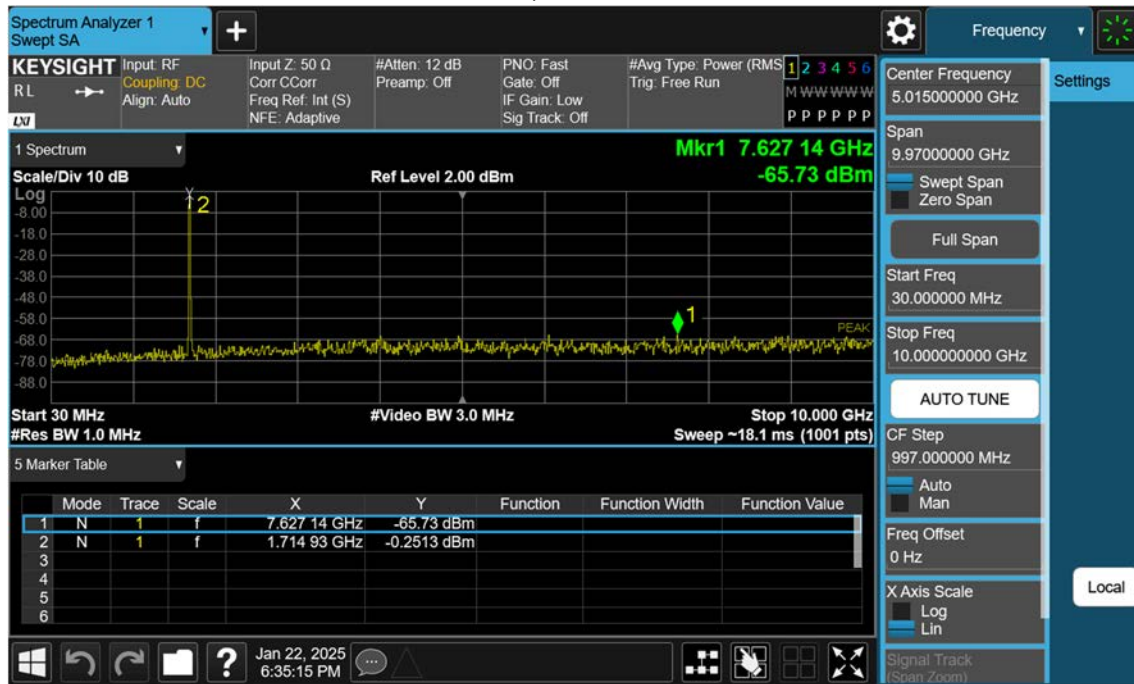

LTE B66_10 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

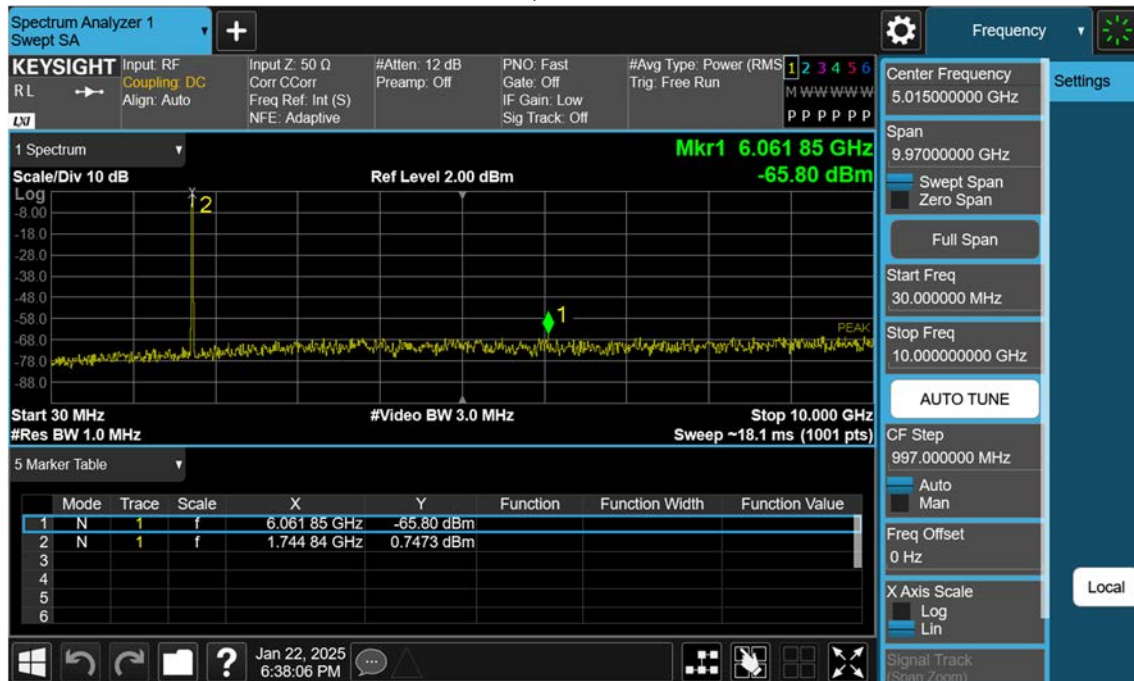

LTE B66_10 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

