

FCC DTS REPORT

Certification

Applicant Name: SAMSUNG Electronics Co., Ltd.	Date of Issue: December 14, 2021
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	Test Site/Location: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
	Report No.: HCT-RF-2112-FC012-R1

FCC ID:	A3LSMX700
APPLICANT:	SAMSUNG Electronics Co., Ltd.
According to the Evaluation report, all of the data contained herein is reused from the reference FCC ID : A3LSMX706B report.	

Model:	SM-X700
EUT Type:	Tablet
Average Output Power:	Ant.1 - 802.11b : 18.97 dBm, 802.11g : 17.14 dBm, 802.11n(HT20) : 17.94 dBm Ant.2 - 802.11b : 18.84 dBm, 802.11g : 17.05 dBm, 802.11n(HT20) : 17.90 dBm Ant.1&2 - 802.11b : 21.88 dBm, 802.11g : 19.98 dBm, 802.11n(HT20) : 20.87 dBm
Frequency Range:	2 412 MHz ~ 2 472 MHz
Modulation type:	CCK/DSSS/OFDM
FCC Classification:	Digital Transmission System(DTS)
FCC Rule Part(s):	Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2112-FC012-R1

REVIEWED BY



Report prepared by : Jeong Ho Kim
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2112-FC012	December 01, 2021	- First Approval Report
HCT-RF-2112-FC012-R1	December 14, 2021	- Page 6 : Antenna configurations revised - Page 8. Add the sample calculation

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. TEST METHODOLOGY	9
EUT CONFIGURATION	9
EUT EXERCISE	9
GENERAL TEST PROCEDURES	9
DESCRIPTION OF TEST MODES	9
3. INSTRUMENT CALIBRATION.....	10
4. FACILITIES AND ACCREDITATIONS	10
FACILITIES	10
EQUIPMENT	10
5. ANTENNA REQUIREMENTS	11
6. MEASUREMENT UNCERTAINTY	11
7. DESCRIPTION OF TESTS.....	12
8. SUMMARY TEST OF RESULTS	29
9. TEST RESULT	30
9.1 DUTY CYCLE.....	30
9.2 6 dB BANDWIDTH	33
9.3 OUTPUT POWER	39
9.4 POWER SPECTRAL DENSITY	69
9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS.....	76
9.6 RADIATED SPURIOUS EMISSIONS	109
9.7 RADIATED RESTRICTED BAND EDGES	119
9.8 POWERLINE CONDUCTED EMISSIONS	126
10. LIST OF TEST EQUIPMENT	130
11. ANNEX A_ TEST SETUP PHOTO	132

1. EUT DESCRIPTION

Model	SM-X700		
Additional Model	-		
EUT Type	Tablet		
Power Supply	DC 3.86 V		
Frequency Range	2 412 MHz ~ 2 472 MHz		
Max. RF Output Power	<u>Peak Power</u> (For information only)	Ant. 1	802.11b : 23.84 dBm 802.11g : 25.23 dBm 802.11n(HT20) : 25.70 dBm
		Ant.2	802.11b : 23.52 dBm 802.11g : 25.27 dBm 802.11n(HT20) : 25.60 dBm
		Ant.1&2 (MIMO)	802.11b : 26.66 dBm 802.11g : 28.18 dBm 802.11n(HT20) : 28.63 dBm
	<u>Average Power</u>	Ant. 1	802.11b : 18.97 dBm 802.11g : 17.14 dBm 802.11n(HT20) : 17.94 dBm
		Ant.2	802.11b : 18.84 dBm 802.11g : 17.05 dBm 802.11n(HT20) : 17.90 dBm
		Ant.1&2 (MIMO)	802.11b : 21.88 dBm 802.11g : 19.98 dBm 802.11n(HT20) : 20.87 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n		
Number of Channels	13 Channels		
Date(s) of Tests	October 28, 2021 ~ November 26, 2021		
Serial number	Radiated: R32R8005JJT Conducted: R32R80056RR		

ANTENNA CONFIGURATIONS

Configurations	SISO		SDM	CDD
	Ant1	Ant2	Ant1 + Ant2	Ant1 + Ant2
802.11b	X	O	X	O
802.11g	X	O	X	O
802.11n(HT20)	X	O	O	O

Note:

- (1) O = Support, X = Not Support
- (2) SISO = Single Input Single Output
- (3) SDM = Spatial Diversity Multiplexing
- (4) CDD = Cyclic Delay Diversity
- (5) SISO test was performed for the MIMO test result.

2.This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz bands simultaneously on each antenna.

RSDB Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	Bluetooth Ant.1	Bluetooth Ant.2	Test case
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	on	on			on	on			
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on					<u>Case 1</u>
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO		on	on	on			on		
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO		on			on	on	on		

Non-DBS	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	Bluetooth Ant.1	Bluetooth Ant.2	Test case
Bluetooth ANT.2 + 6 GHz WiFi MIMO					on	on		on	
Bluetooth ANT.2 + 5GHz WiFi MIMO			on	on				on	
Bluetooth ANT.1 + 6 GHz WiFi MIMO					on	on	on		
Bluetooth ANT.1 + 5GHz WiFi MIMO			on	on	-	-	on	-	<u>Case 2</u>

3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) f) (ii)

Directional gain =

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Ant Gain (dBi)		N _{ANT} / N _{SS}	Directional Gain (dBi)
ANT1(Core 0)	-4.52	2 / 2	CDD : -2.28
ANT2(Core 1)	-6.14		SDM : -4.52

Sample Calculation

Directional Gain = 10*LOG(((10^(ANT1 Gain/20)+10^(ANT2 Gain/20))²)/2) dBi

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 (Confidence level about 95 %, $k=2$)

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

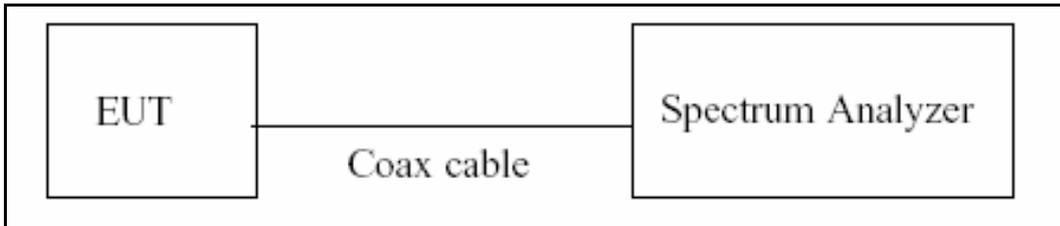

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6 dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Measured Level + ATT loss + Cable loss
- Conducted Output Power(Average) = Measured Level + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3 kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / RBW]$.
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98 %

Sample Calculation

- Power Spectral Density = Measured Level + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	20.21
100	20.26
200	20.30
300	20.36
400	20.39
500	20.40
600	20.40
700	20.44
800	20.46
900	20.55
1000	20.59
2000	20.77
2400	20.84
2480	20.87
2500	20.87
3000	20.99
4000	21.14
5000	21.28
5150	21.32
5850	21.43
6000	21.43
7000	21.49
8000	21.57
9000	21.64
10 000	21.74
11 000	21.88
12 000	22.06
13 000	22.14
14 000	22.21
15 000	22.27
16 000	22.32
17 000	22.42
18 000	22.52
19 000	22.58
20 000	22.65
21 000	22.89
22 000	22.90
23 000	23.12
24 000	22.99
25 000	23.10
26 000	23.14

Note : 1. 2 400 ~ 2 500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(20 dB) + Cable loss(1ea) + EUT Cable loss


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

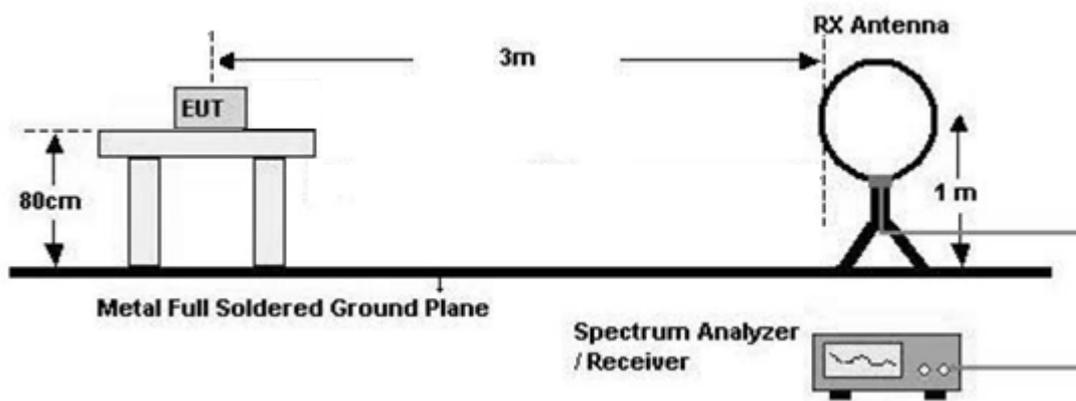

30 MHz - 1 GHz

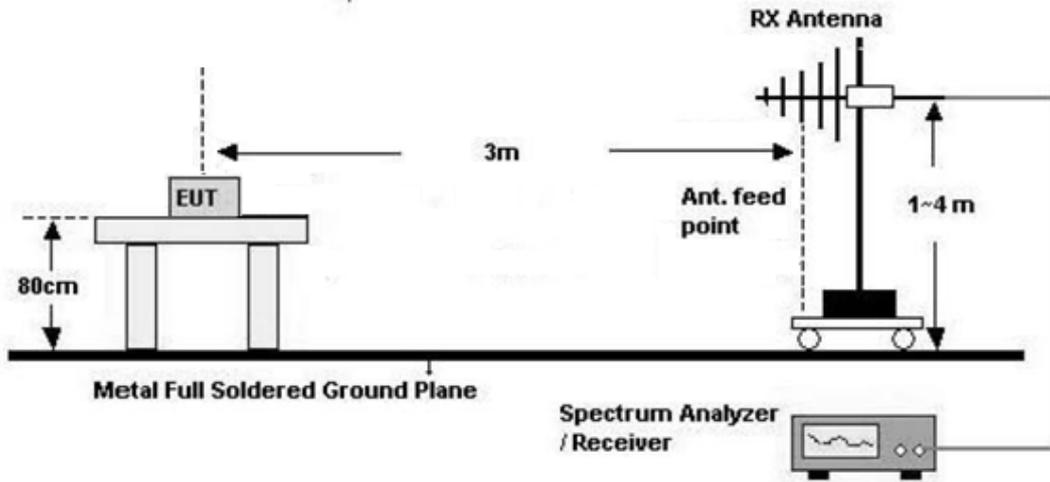

Above 1 GHz

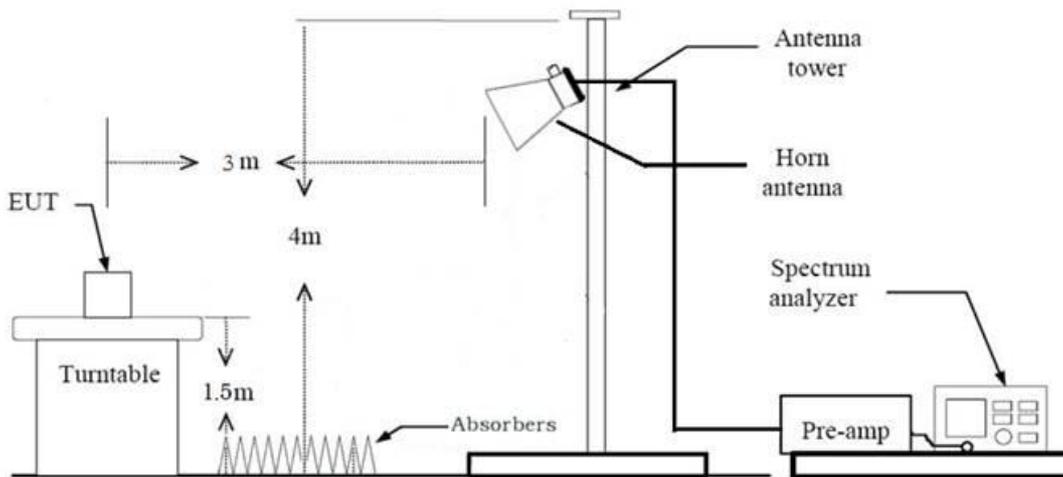

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
- ※ In general, (1) is used mainly
7. Total = Measured Level + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak

- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle $\geq 98 \%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98 \%$, duty cycle variations are less than $\pm 2 \%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20 \log$ (test distance / specific distance) (dB)

11. Total(Measurement Type : Peak)

$$= \text{Measured Level} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle $\geq 98 \%$)

$$= \text{Measured Level} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle $< 98 \%$)

$$= \text{Measured Level} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(A.G)} + \text{Distance Factor(D.F)} \\ + \text{Duty Cycle Factor}$$

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average): Duty cycle $\geq 98 \%$,
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - (3) Measurement Type(Average): Duty cycle $< 98 \%$, duty cycle variations are less than $\pm 2 \%$
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

= Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98 %)

= Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Measured Level + Correction Factor

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, Keyboard, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : Z, Y
 - Radiated Restricted Band Edge : Z
3. Duty cycle factor applies only 802.11g/n (Duty cycle < 98 %).
4. All data rate of operation were investigated and the test results are worst case in lowest Data Rate of each mode.
 - 802.11b : 1 Mbps
 - 802.11g : 6 Mbps
 - 802.11n(HT20): MCS0
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

Radiated test(RSDB)

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone, Stand alone + External accessories(Earphone, Keyboard, etc)
- Worstcase : Stand alone

2. EUT Axis

- Radiated Spurious Emissions : X, Z

3. Test case

RSDB Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	Bluetooth Ant.1	Bluetooth Ant.2	Test case
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	on	on			on	on			
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on					<u>Case 1</u>
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO		on	on	on			on		
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO		on			on	on	on		

Non-DBS	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	Bluetooth Ant.1	Bluetooth Ant.2	Test case
Bluetooth ANT.2 + 6 GHz WiFi MIMO					on	on		on	
Bluetooth ANT.2 + 5GHz WiFi MIMO			on	on				on	
Bluetooth ANT.1 + 6 GHz WiFi MIMO					on	on	on		
Bluetooth ANT.1 + 5GHz WiFi MIMO			on	on	-	-	on	-	<u>Case 2</u>

4. The following tables show the worst case configurations determined during testing.

(Worst case: The lowest margin condition the channels and modes were selected for test.)

(Test case 1,2 Result : Please refer to the SM-X700 [BT, UNII, DTS] Test Report.)

Case	Description	2.4GHz Emission	5 GHz Emission
1	Antenna	Ant All	Ant All
	Channel	6	36
	Data Rate	1 Mbps	MCS 0
	Mode	802.11b	802.11n

Case	Description	Bluetooth Emission	5 GHz Emission
2	Antenna	ANT1	Ant All
	Channel	39	36
	Data Rate	1 Mbps	MCS 0
	Mode	GFSK	802.11n

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone + External accessories(Earphone, Keyboard, etc)+Travel Adapter,

Stand alone + Travel Adapter

- Worstcase : Stand alone + Travel Adapter

Conducted test

1. The EUT was configured with data rate of highest power.

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS


9. TEST RESULT

9.1 DUTY CYCLE


Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.818	8.919	0.989	0.049
	2	4.415	4.520	0.977	0.103
	5.5	1.662	1.920	0.865	0.628
	11	0.882	1.191	0.740	1.305
802.11g	6	1.459	1.586	0.920	0.362
	9	0.987	1.093	0.903	0.443
	12	0.740	0.851	0.869	0.610
	18	0.502	0.613	0.818	0.872
	24	0.380	0.486	0.781	1.072
	36	0.263	0.370	0.712	1.473
	48	0.205	0.317	0.647	1.888
	54	0.185	0.300	0.618	2.093
802.11n (HT20)	6.5 (MCS0)	1.246	1.353	0.921	0.356
	13 (MCS1)	0.643	0.750	0.858	0.665
	19.5 (MCS2)	0.441	0.547	0.806	0.939
	26 (MCS3)	0.339	0.446	0.761	1.184
	39 (MCS4)	0.243	0.345	0.706	1.513
	52 (MCS5)	0.187	0.329	0.569	2.448
	58.5 (MCS6)	0.172	0.324	0.531	2.747
	65 (MCS7)	0.161	0.320	0.502	2.991

Test Plots


Duty cycle plot (802.11b(1 Mbps))

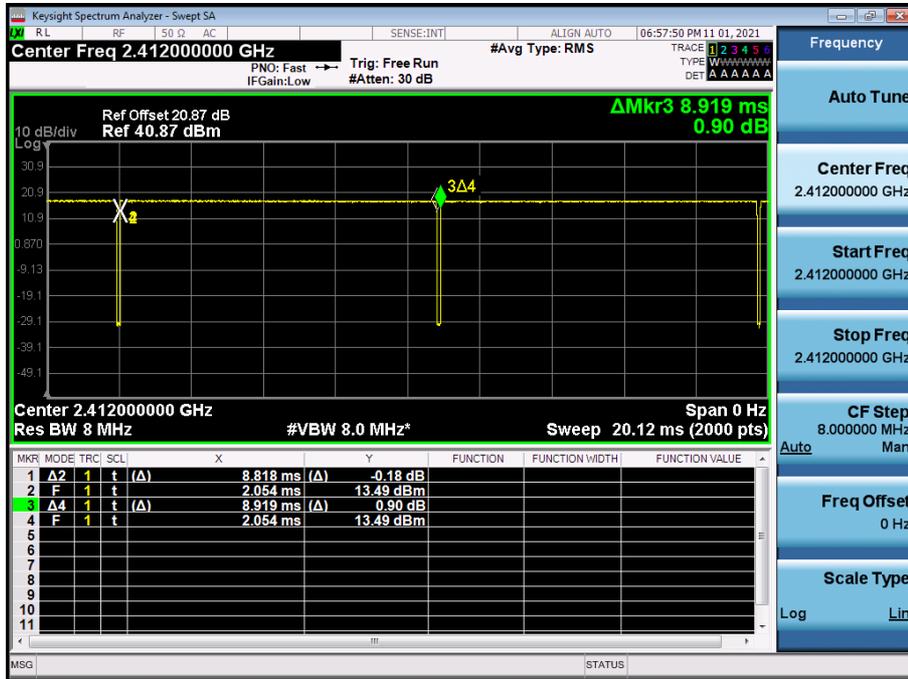

Duty cycle plot (802.11g(6 Mbps))

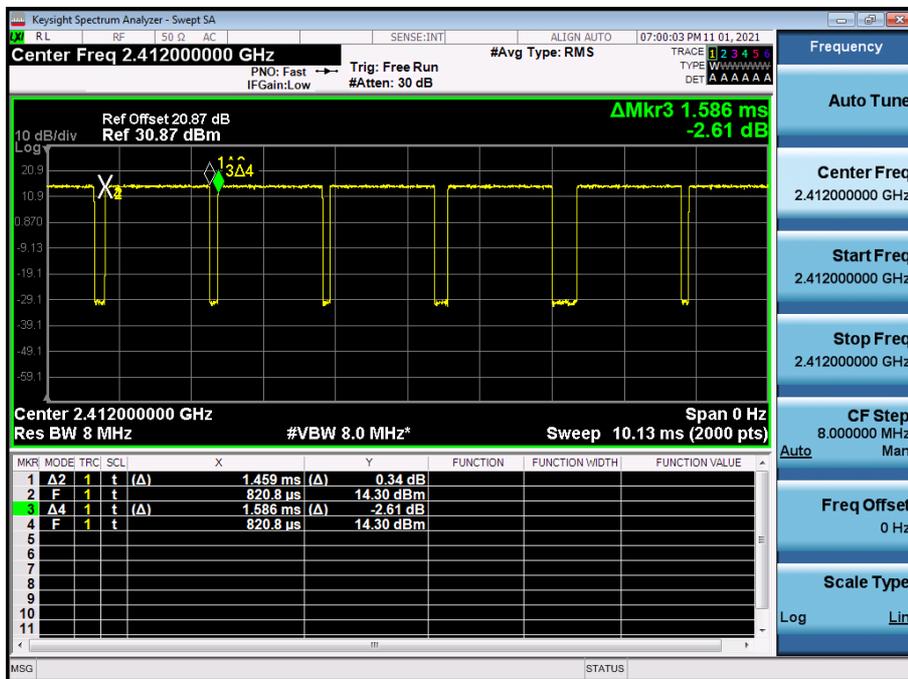

Duty cycle plot (802.11n(MCS0))

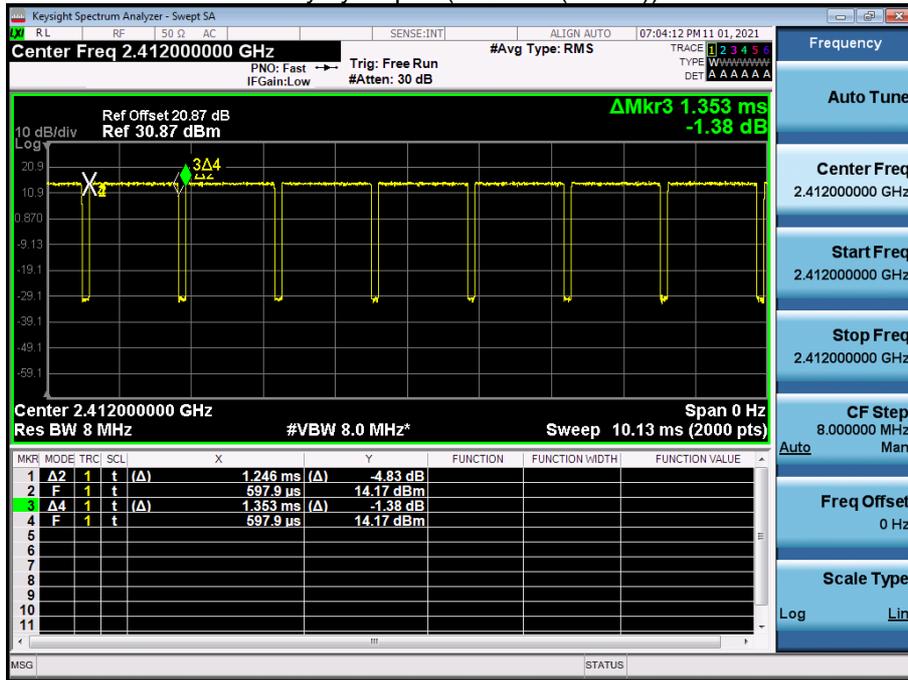

Note:

In order to simplify the report, attached plots were only the most lowest data rate.

9.2 6 dB BANDWIDTH

[Ant.1]

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	7.569	0.5
2417	2	7.598	0.5
2437	6	8.107	0.5
2457	10	7.593	0.5
2462	11	8.129	0.5
2467	12	8.032	0.5
2472	13	7.625	0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	15.42	0.5
2417	2	15.15	0.5
2437	6	15.17	0.5
2457	10	15.16	0.5
2462	11	15.71	0.5
2467	12	15.14	0.5
2472	13	15.15	0.5

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	14.71	0.5
2417	2	15.49	0.5
2437	6	15.12	0.5
2457	10	15.14	0.5
2462	11	16.31	0.5
2467	12	15.13	0.5
2472	13	15.12	0.5

[Ant.2]

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	7.123	0.5
2417	2	8.085	0.5
2437	6	7.108	0.5
2457	10	8.139	0.5
2462	11	7.599	0.5
2467	12	8.124	0.5
2472	13	8.092	0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	14.46	0.5
2417	2	15.14	0.5
2437	6	15.16	0.5
2457	10	15.17	0.5
2462	11	15.72	0.5
2467	12	13.90	0.5
2472	13	15.14	0.5

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	15.94	0.5
2417	2	15.15	0.5
2437	6	15.44	0.5
2457	10	15.12	0.5
2462	11	16.07	0.5
2467	12	15.12	0.5
2472	13	15.13	0.5


[Ant.1]

▣ Test Plots


6 dB Bandwidth plot (802.11b-CH 1)



6 dB Bandwidth plot (802.11g-CH 12)

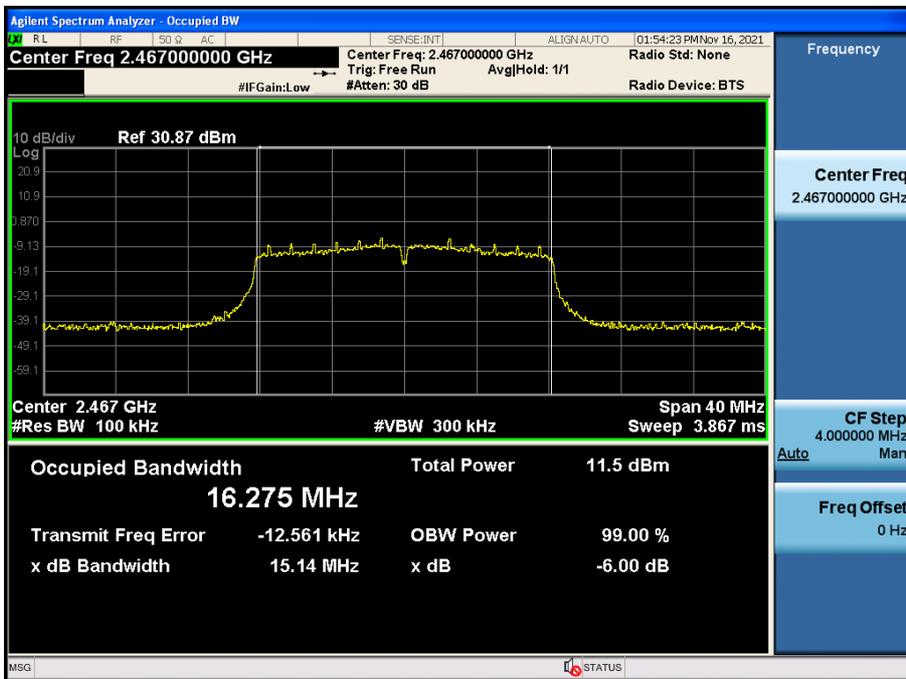


6 dB Bandwidth plot (802.11n_HT20-CH 1)

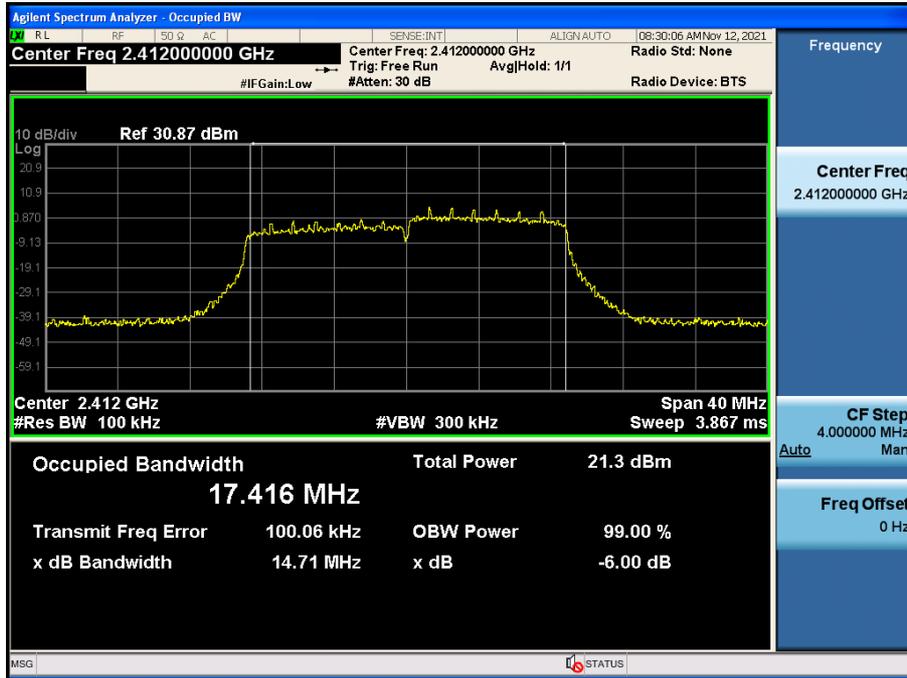


[Ant.2]

▣ Test Plots


6 dB Bandwidth plot (802.11b-CH 6)

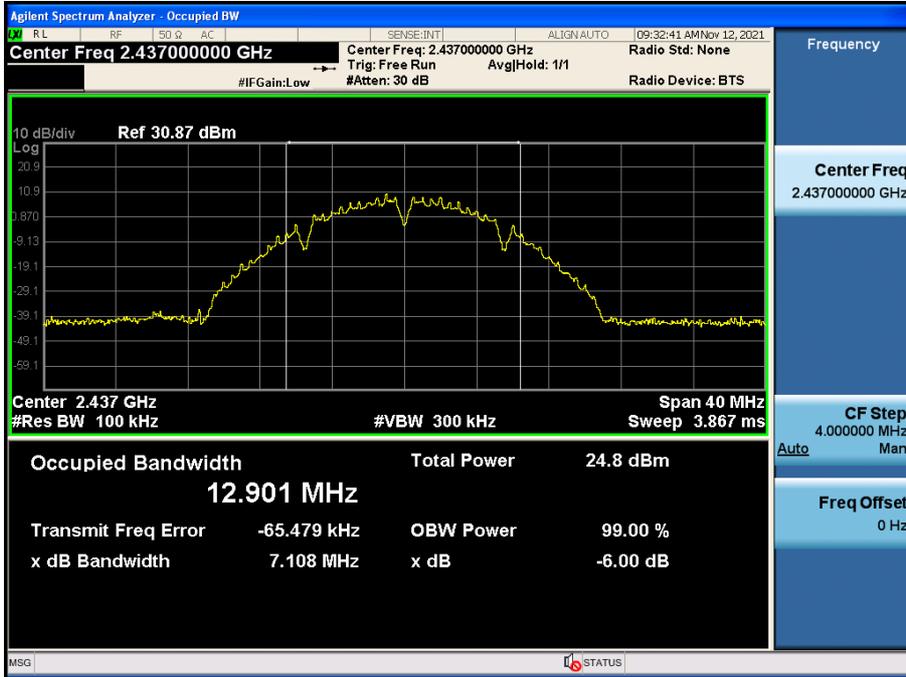

6 dB Bandwidth plot (802.11g-CH 12)

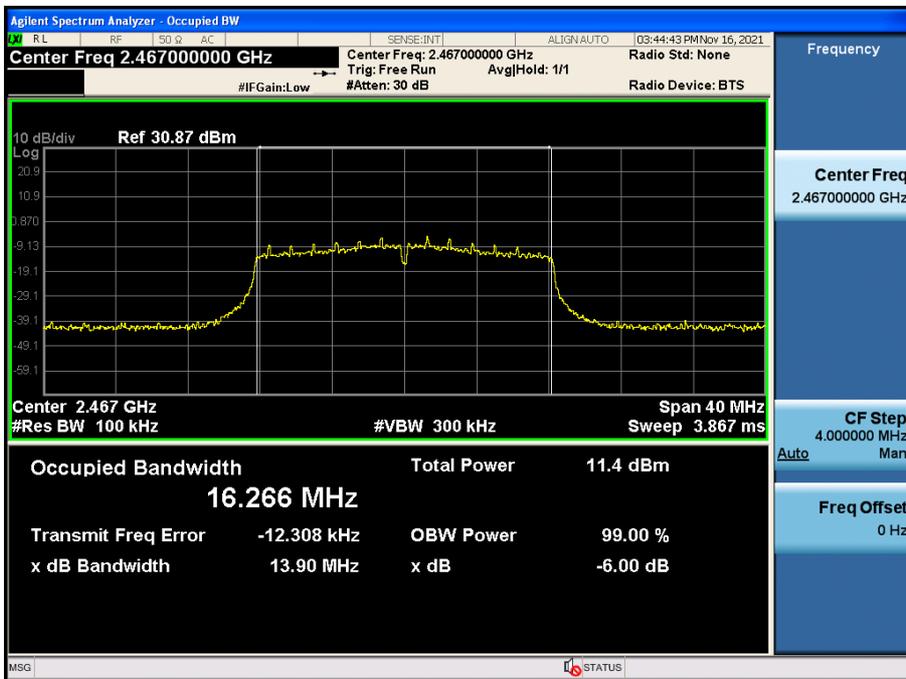

6 dB Bandwidth plot (802.11n_HT20-CH 12)

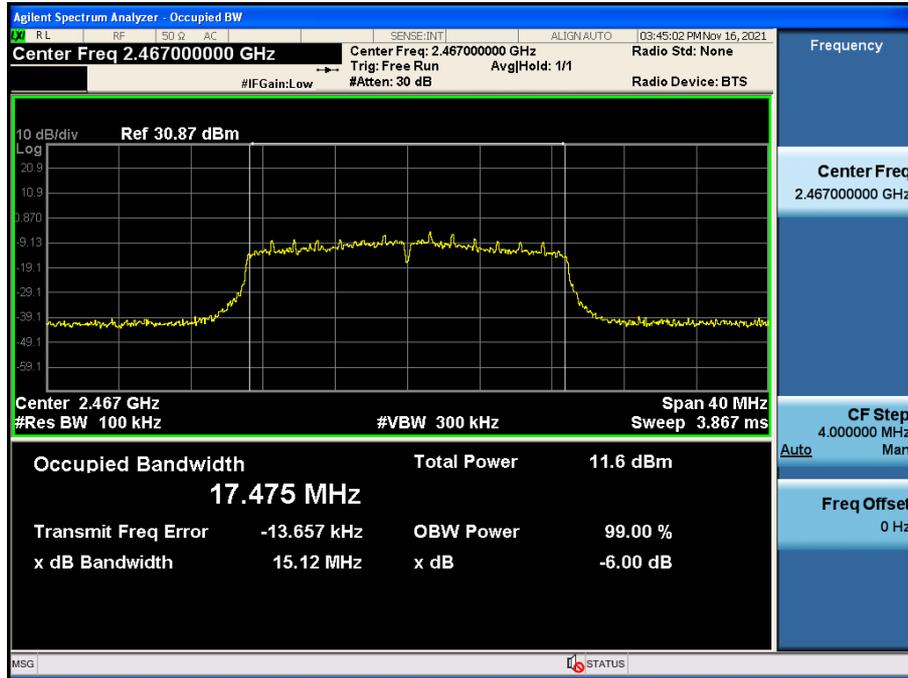

Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

9.3 OUTPUT POWER

Peak Power

Power Meter offset

Attenuator loss(20 dB) + Cable loss + EUT Cable loss

[Ant.1]

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1	20.01	30
		2	20.47	30
		5.5	21.93	30
		11	23.34	30
2417	2	1	20.25	30
		2	20.69	30
		5.5	22.17	30
		11	23.59	30
2437	6	1	20.33	30
		2	20.79	30
		5.5	22.23	30
		11	23.69	30
2457	10	1	20.34	30
		2	20.80	30
		5.5	22.31	30
		11	23.67	30
2462	11	1	20.51	30
		2	20.96	30
		5.5	22.42	30
		11	23.84	30
2467	12	1	7.51	30
		2	7.79	30
		5.5	9.24	30
		11	10.14	30
2472	13	1	1.69	30
		2	1.95	30
		5.5	3.45	30
		11	4.90	30

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6	24.09	30
		9	24.42	30
		12	24.71	30
		18	24.54	30
		24	24.95	30
		36	24.53	30
		48	24.55	30
		54	24.80	30
2417	2	6	24.48	30
		9	24.82	30
		12	25.10	30
		18	24.73	30
		24	25.17	30
		36	24.84	30
		48	24.79	30
		54	25.05	30
2437	6	6	24.40	30
		9	24.68	30
		12	24.98	30
		18	24.62	30
		24	25.07	30
		36	24.77	30
		48	24.83	30
		54	24.96	30
2457	10	6	24.62	30
		9	24.87	30
		12	25.20	30
		18	24.83	30
		24	25.22	30
		36	24.98	30
		48	25.04	30
		54	25.11	30

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2462	11	6	24.47	30
		9	24.80	30
		12	25.12	30
		18	24.56	30
		24	25.21	30
		36	24.98	30
		48	24.98	30
		54	25.23	30
2467	12	6	12.32	30
		9	12.60	30
		12	13.00	30
		18	12.57	30
		24	13.29	30
		36	13.03	30
		48	13.11	30
		54	13.30	30
2472	13	6	6.57	30
		9	6.85	30
		12	7.21	30
		18	6.81	30
		24	7.43	30
		36	7.16	30
		48	7.19	30
		54	7.40	30

802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	0	23.82	30
		1	23.83	30
		2	23.92	30
		3	24.01	30
		4	23.96	30
		5	24.03	30
		6	24.01	30
		7	23.93	30
2417	2	0	25.52	30
		1	25.50	30
		2	25.61	30
		3	25.70	30
		4	25.60	30
		5	25.65	30
		6	25.63	30
		7	25.54	30
2437	6	0	25.24	30
		1	25.31	30
		2	25.27	30
		3	25.46	30
		4	25.24	30
		5	25.37	30
		6	25.38	30
		7	25.19	30
2457	10	0	25.48	30
		1	25.47	30
		2	25.53	30
		3	25.68	30
		4	25.56	30
		5	25.56	30
		6	25.35	30
		7	25.48	30

802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2462	11	0	23.59	30
		1	23.59	30
		2	23.61	30
		3	23.85	30
		4	23.90	30
		5	23.98	30
		6	23.91	30
		7	23.87	30
2467	12	0	12.55	30
		1	12.65	30
		2	12.63	30
		3	12.88	30
		4	12.61	30
		5	12.77	30
		6	12.72	30
		7	12.67	30
2472	13	0	6.79	30
		1	6.84	30
		2	6.88	30
		3	6.99	30
		4	6.72	30
		5	6.82	30
		6	6.83	30
		7	6.71	30

[Ant.2]

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1	19.87	30
		2	20.28	30
		5.5	21.73	30
		11	23.15	30
2417	2	1	23.52	30
		2	20.59	30
		5.5	21.93	30
		11	23.41	30
2437	6	1	20.05	30
		2	20.46	30
		5.5	21.88	30
		11	23.33	30
2457	10	1	20.16	30
		2	20.60	30
		5.5	21.96	30
		11	23.52	30
2462	11	1	20.16	30
		2	20.58	30
		5.5	21.98	30
		11	23.46	30
2467	12	1	7.38	30
		2	7.62	30
		5.5	9.06	30
		11	10.45	30
2472	13	1	1.56	30
		2	1.83	30
		5.5	3.27	30
		11	4.70	30

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6	23.63	30
		9	23.92	30
		12	24.34	30
		18	24.01	30
		24	24.37	30
		36	23.99	30
		48	24.04	30
		54	24.29	30
2417	2	6	24.51	30
		9	24.56	30
		12	24.88	30
		18	24.40	30
		24	24.87	30
		36	24.56	30
		48	24.59	30
		54	24.82	30
2437	6	6	24.52	30
		9	24.80	30
		12	25.26	30
		18	24.73	30
		24	25.27	30
		36	24.89	30
		48	24.96	30
		54	25.10	30
2457	10	6	24.16	30
		9	24.43	30
		12	24.76	30
		18	24.29	30
		24	24.26	30
		36	24.45	30
		48	24.54	30
		54	24.69	30

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2462	11	6	24.11	30
		9	24.47	30
		12	24.61	30
		18	24.32	30
		24	25.03	30
		36	24.69	30
		48	24.70	30
		54	24.94	30
2467	12	6	11.84	30
		9	12.11	30
		12	12.50	30
		18	12.10	30
		24	12.63	30
		36	12.33	30
		48	12.42	30
		54	12.57	30
2472	13	6	6.36	30
		9	6.66	30
		12	7.01	30
		18	6.59	30
		24	7.28	30
		36	6.93	30
		48	6.93	30
		54	7.19	30

802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	0	23.98	30
		1	23.93	30
		2	24.06	30
		3	24.14	30
		4	24.12	30
		5	24.19	30
		6	24.22	30
		7	24.07	30
2417	2	0	25.49	30
		1	25.34	30
		2	25.37	30
		3	25.55	30
		4	25.31	30
		5	25.34	30
		6	25.54	30
		7	25.32	30
2437	6	0	25.45	30
		1	25.41	30
		2	25.51	30
		3	25.60	30
		4	25.49	30
		5	25.54	30
		6	25.59	30
		7	25.46	30
2457	10	0	25.23	30
		1	25.32	30
		2	25.28	30
		3	25.42	30
		4	25.37	30
		5	25.27	30
		6	25.29	30
		7	25.20	30

802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2462	11	0	23.43	30
		1	23.41	30
		2	23.42	30
		3	23.61	30
		4	23.65	30
		5	23.77	30
		6	23.79	30
		7	23.62	30
2467	12	0	12.24	30
		1	12.32	30
		2	12.35	30
		3	12.53	30
		4	12.26	30
		5	12.37	30
		6	12.39	30
		7	12.30	30
2472	13	0	6.56	30
		1	6.57	30
		2	6.69	30
		3	6.75	30
		4	6.50	30
		5	6.59	30
		6	6.57	30
		7	6.48	30

[MIMO]

802.11b Mode		Rate (Mbps)	Ant.1 Measured Power(dBm)	Ant.2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.					
2412	1	1	20.01	19.87	22.95	30
		2	20.47	20.28	23.39	30
		5.5	21.93	21.73	24.84	30
		11	23.34	23.15	26.26	30
2417	2	1	20.25	23.52	25.20	30
		2	20.69	20.59	23.65	30
		5.5	22.17	21.93	25.07	30
		11	23.59	23.41	26.51	30
2437	6	1	20.33	20.05	23.20	30
		2	20.79	20.46	23.64	30
		5.5	22.23	21.88	25.07	30
		11	23.69	23.33	26.52	30
2457	10	1	20.34	20.16	23.26	30
		2	20.80	20.60	23.71	30
		5.5	22.31	21.96	25.15	30
		11	23.67	23.52	26.60	30
2462	11	1	20.51	20.16	23.35	30
		2	20.96	20.58	23.79	30
		5.5	22.42	21.98	25.22	30
		11	23.84	23.46	26.66	30
2467	12	1	7.51	7.38	10.46	30
		2	7.79	7.62	10.71	30
		5.5	9.24	9.06	12.16	30
		11	10.14	10.45	13.31	30
2472	13	1	1.69	1.56	4.64	30
		2	1.95	1.83	4.90	30
		5.5	3.45	3.27	6.37	30
		11	4.90	4.70	7.81	30

802.11g Mode		Rate (Mbps)	Ant.1 Measured Power(dBm)	Ant.2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.					
2412	1	6	24.09	23.63	26.88	30
		9	24.42	23.92	27.19	30
		12	24.71	24.34	27.54	30
		18	24.54	24.01	27.29	30
		24	24.95	24.37	27.68	30
		36	24.53	23.99	27.27	30
		48	24.55	24.04	27.31	30
		54	24.80	24.29	27.56	30
2417	2	6	24.48	24.51	27.51	30
		9	24.82	24.56	27.70	30
		12	25.10	24.88	28.00	30
		18	24.73	24.40	27.58	30
		24	25.17	24.87	28.03	30
		36	24.84	24.56	27.71	30
		48	24.79	24.59	27.70	30
		54	25.05	24.82	27.94	30
2437	6	6	24.40	24.52	27.47	30
		9	24.68	24.80	27.75	30
		12	24.98	25.26	28.13	30
		18	24.62	24.73	27.68	30
		24	25.07	25.27	28.18	30
		36	24.77	24.89	27.84	30
		48	24.83	24.96	27.91	30
		54	24.96	25.10	28.04	30
2457	10	6	24.62	24.16	27.40	30
		9	24.87	24.43	27.66	30
		12	25.20	24.76	28.00	30
		18	24.83	24.29	27.58	30
		24	25.22	24.26	27.78	30
		36	24.98	24.45	27.73	30
		48	25.04	24.54	27.81	30
		54	25.11	24.69	27.92	30

802.11g Mode		Rate (Mbps)	Ant.1 Measured Power(dBm)	Ant.2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.					
2462	11	6	24.47	24.11	27.30	30
		9	24.80	24.47	27.65	30
		12	25.12	24.61	27.88	30
		18	24.56	24.32	27.45	30
		24	25.21	25.03	28.13	30
		36	24.98	24.69	27.85	30
		48	24.98	24.70	27.85	30
		54	25.23	24.94	28.10	30
2467	12	6	12.32	11.84	15.10	30
		9	12.60	12.11	15.37	30
		12	13.00	12.50	15.77	30
		18	12.57	12.10	15.35	30
		24	13.29	12.63	15.98	30
		36	13.03	12.33	15.71	30
		48	13.11	12.42	15.79	30
		54	13.30	12.57	15.96	30
2472	13	6	6.57	6.36	9.48	30
		9	6.85	6.66	9.77	30
		12	7.21	7.01	10.12	30
		18	6.81	6.59	9.71	30
		24	7.43	7.28	10.37	30
		36	7.16	6.93	10.06	30
		48	7.19	6.93	10.07	30
		54	7.40	7.19	10.31	30

802.11n(HT20) Mode		MCS Index	Ant.1 Measured Power(dBm)	Ant.2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.					
2412	1	0	23.82	23.98	26.91	30
		1	23.83	23.93	26.89	30
		2	23.92	24.06	27.00	30
		3	24.01	24.14	27.09	30
		4	23.96	24.12	27.05	30
		5	24.03	24.19	27.12	30
		6	24.01	24.22	27.13	30
		7	23.93	24.07	27.01	30
2417	2	0	25.52	25.49	28.51	30
		1	25.50	25.34	28.43	30
		2	25.61	25.37	28.50	30
		3	25.70	25.55	28.63	30
		4	25.60	25.31	28.47	30
		5	25.65	25.34	28.50	30
		6	25.63	25.54	28.59	30
		7	25.54	25.32	28.44	30
2437	6	0	25.24	25.45	28.36	30
		1	25.31	25.41	28.37	30
		2	25.27	25.51	28.40	30
		3	25.46	25.60	28.54	30
		4	25.24	25.49	28.38	30
		5	25.37	25.54	28.46	30
		6	25.38	25.59	28.49	30
		7	25.19	25.46	28.33	30
2457	10	0	25.48	25.23	28.37	30
		1	25.47	25.32	28.41	30
		2	25.53	25.28	28.42	30
		3	25.68	25.42	28.56	30
		4	25.56	25.37	28.48	30
		5	25.56	25.27	28.43	30
		6	25.35	25.29	28.33	30
		7	25.48	25.20	28.35	30

802.11n(HT20) Mode		MCS Index	Ant.1 Measured Power(dBm)	Ant.2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.					
2462	11	0	23.59	23.43	26.52	30
		1	23.59	23.41	26.51	30
		2	23.61	23.42	26.53	30
		3	23.85	23.61	26.74	30
		4	23.90	23.65	26.79	30
		5	23.98	23.77	26.89	30
		6	23.91	23.79	26.86	30
		7	23.87	23.62	26.75	30
2467	12	0	12.55	12.24	15.41	30
		1	12.65	12.32	15.50	30
		2	12.63	12.35	15.50	30
		3	12.88	12.53	15.72	30
		4	12.61	12.26	15.45	30
		5	12.77	12.37	15.58	30
		6	12.72	12.39	15.57	30
		7	12.67	12.30	15.50	30
2472	13	0	6.79	6.56	9.68	30
		1	6.84	6.57	9.72	30
		2	6.88	6.69	9.79	30
		3	6.99	6.75	9.88	30
		4	6.72	6.50	9.62	30
		5	6.82	6.59	9.72	30
		6	6.83	6.57	9.71	30
		7	6.71	6.48	9.60	30

Average Power

Power Meter offset Loss = Attenuator loss(20 dB) + Cable loss + EUT Cable loss

[Ant.1]

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1	17.65	0.05	17.70	30
		2	17.72	0.10	17.82	30
		5.5	17.54	0.63	18.17	30
		11	17.41	1.31	18.71	30
2417	2	1	17.73	0.05	17.78	30
		2	17.96	0.10	18.06	30
		5.5	17.75	0.63	18.38	30
		11	17.66	1.31	18.97	30
2437	6	1	17.75	0.05	17.80	30
		2	18.00	0.10	18.10	30
		5.5	17.76	0.63	18.39	30
		11	17.60	1.31	18.91	30
2457	10	1	17.96	0.05	18.01	30
		2	18.06	0.10	18.16	30
		5.5	17.92	0.63	18.55	30
		11	17.66	1.31	18.97	30
2462	11	1	18.01	0.05	18.06	30
		2	18.12	0.10	18.22	30
		5.5	17.96	0.63	18.59	30
		11	17.66	1.31	18.97	30
2467	12	1	4.91	0.05	4.96	30
		2	4.89	0.10	4.99	30
		5.5	4.79	0.63	5.42	30
		11	4.24	1.31	5.54	30
2472	13	1	-0.73	0.05	-0.68	30
		2	-0.78	0.10	-0.68	30
		5.5	-0.91	0.63	-0.29	30
		11	-1.33	1.31	-0.02	30

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6	16.25	0.36	16.61	30
		9	16.00	0.44	16.44	30
		12	15.86	0.61	16.47	30
		18	15.63	0.87	16.50	30
		24	15.40	1.07	16.47	30
		36	14.99	1.47	16.46	30
		48	14.40	1.89	16.29	30
		54	13.91	2.09	16.00	30
2417	2	6	16.72	0.36	17.08	30
		9	16.11	0.44	16.56	30
		12	15.72	0.61	16.33	30
		18	16.15	0.87	17.03	30
		24	15.72	1.07	16.79	30
		36	15.28	1.47	16.75	30
		48	14.93	1.89	16.82	30
		54	14.32	2.09	16.42	30
2437	6	6	16.51	0.36	16.88	30
		9	16.36	0.44	16.80	30
		12	16.25	0.61	16.86	30
		18	16.00	0.87	16.87	30
		24	15.67	1.07	16.74	30
		36	15.23	1.47	16.71	30
		48	14.74	1.89	16.63	30
		54	14.40	2.09	16.49	30
2457	10	6	16.78	0.36	17.14	30
		9	16.12	0.44	16.56	30
		12	16.45	0.61	17.06	30
		18	16.25	0.87	17.12	30
		24	15.83	1.07	16.91	30
		36	15.40	1.47	16.88	30
		48	14.90	1.89	16.79	30
		54	14.15	2.09	16.24	30

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2462	11	6	16.49	0.36	16.85	30
		9	16.24	0.44	16.68	30
		12	16.16	0.61	16.77	30
		18	15.96	0.87	16.83	30
		24	15.75	1.07	16.82	30
		36	15.32	1.47	16.79	30
		48	14.82	1.89	16.71	30
		54	14.36	2.09	16.45	30
2467	12	6	4.67	0.36	5.03	30
		9	4.28	0.44	4.72	30
		12	4.13	0.61	4.74	30
		18	3.99	0.87	4.86	30
		24	3.93	1.07	5.00	30
		36	3.52	1.47	4.99	30
		48	3.07	1.89	4.96	30
		54	2.63	2.09	4.72	30
2472	13	6	-1.23	0.36	-0.87	30
		9	-1.47	0.44	-1.02	30
		12	-1.63	0.61	-1.02	30
		18	-1.77	0.87	-0.90	30
		24	-1.97	1.07	-0.89	30
		36	-2.38	1.47	-0.91	30
		48	-2.85	1.89	-0.96	30
		54	-3.25	2.09	-1.16	30

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	0	16.14	0.36	16.50	30
		1	15.51	0.66	16.17	30
		2	15.36	0.94	16.30	30
		3	15.12	1.18	16.30	30
		4	14.88	1.51	16.39	30
		5	13.99	2.45	16.44	30
		6	13.59	2.75	16.34	30
		7	13.26	2.99	16.26	30
2417	2	0	17.59	0.36	17.94	30
		1	17.10	0.66	17.76	30
		2	16.90	0.94	17.84	30
		3	16.66	1.18	17.85	30
		4	16.39	1.51	17.90	30
		5	15.48	2.45	17.93	30
		6	15.12	2.75	17.87	30
		7	14.75	2.99	17.74	30
2437	6	0	17.45	0.36	17.81	30
		1	16.87	0.66	17.54	30
		2	16.77	0.94	17.71	30
		3	16.46	1.18	17.65	30
		4	16.23	1.51	17.74	30
		5	15.35	2.45	17.80	30
		6	14.90	2.75	17.65	30
		7	14.65	2.99	17.65	30
2457	10	0	17.55	0.36	17.91	30
		1	17.08	0.66	17.75	30
		2	16.91	0.94	17.85	30
		3	16.72	1.18	17.90	30
		4	16.34	1.51	17.85	30
		5	15.45	2.45	17.90	30
		6	15.15	2.75	17.90	30
		7	14.75	2.99	17.74	30

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2462	11	0	15.64	0.36	15.99	30
		1	14.95	0.66	15.62	30
		2	14.97	0.94	15.91	30
		3	14.69	1.18	15.88	30
		4	14.44	1.51	15.95	30
		5	13.53	2.45	15.97	30
		6	13.17	2.75	15.92	30
		7	12.86	2.99	15.85	30
2467	12	0	4.79	0.36	5.15	30
		1	4.17	0.66	4.84	30
		2	4.06	0.94	5.00	30
		3	3.91	1.18	5.09	30
		4	3.49	1.51	5.00	30
		5	2.68	2.45	5.13	30
		6	2.31	2.75	5.06	30
		7	1.97	2.99	4.96	30
2472	13	0	-1.09	0.36	-0.73	30
		1	-1.64	0.66	-0.97	30
		2	-1.73	0.94	-0.79	30
		3	-2.00	1.18	-0.82	30
		4	-2.43	1.51	-0.92	30
		5	-3.26	2.45	-0.81	30
		6	-3.62	2.75	-0.88	30
		7	-3.98	2.99	-0.99	30

[Ant.2]

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1	17.60	0.05	17.65	30
		2	17.72	0.10	17.82	30
		5.5	17.42	0.63	18.05	30
		11	17.31	1.31	18.62	30
2417	2	1	17.47	0.05	17.52	30
		2	17.69	0.10	17.80	30
		5.5	17.51	0.63	18.14	30
		11	17.37	1.31	18.68	30
2437	6	1	17.79	0.05	17.84	30
		2	17.91	0.10	18.01	30
		5.5	17.63	0.63	18.26	30
		11	17.53	1.31	18.84	30
2457	10	1	17.53	0.05	17.58	30
		2	17.62	0.10	17.73	30
		5.5	17.19	0.63	17.82	30
		11	17.32	1.31	18.62	30
2462	11	1	17.79	0.05	17.84	30
		2	17.83	0.10	17.93	30
		5.5	17.70	0.63	18.33	30
		11	17.47	1.31	18.78	30
2467	12	1	4.74	0.05	4.79	30
		2	4.68	0.10	4.78	30
		5.5	4.51	0.63	5.13	30
		11	4.33	1.31	5.64	30
2472	13	1	-0.98	0.05	-0.93	30
		2	-1.02	0.10	-0.92	30
		5.5	-1.17	0.63	-0.54	30
		11	-1.34	1.31	-0.04	30

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6	16.01	0.36	16.37	30
		9	15.69	0.44	16.13	30
		12	15.58	0.61	16.18	30
		18	15.49	0.87	16.36	30
		24	15.07	1.07	16.15	30
		36	14.70	1.47	16.18	30
		48	14.21	1.89	16.09	30
		54	13.77	2.09	15.87	30
2417	2	6	16.21	0.36	16.57	30
		9	16.08	0.44	16.52	30
		12	15.92	0.61	16.53	30
		18	15.64	0.87	16.51	30
		24	15.48	1.07	16.56	30
		36	14.99	1.47	16.46	30
		48	14.52	1.89	16.40	30
		54	14.04	2.09	16.13	30
2437	6	6	16.69	0.36	17.05	30
		9	16.32	0.44	16.77	30
		12	16.25	0.61	16.86	30
		18	16.17	0.87	17.04	30
		24	15.82	1.07	16.90	30
		36	15.38	1.47	16.86	30
		48	14.91	1.89	16.80	30
		54	14.42	2.09	16.51	30
2457	10	6	16.18	0.36	16.54	30
		9	16.01	0.44	16.46	30
		12	15.87	0.61	16.48	30
		18	14.87	0.87	15.75	30
		24	15.29	1.07	16.36	30
		36	14.94	1.47	16.42	30
		48	14.43	1.89	16.32	30
		54	13.91	2.09	16.01	30

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2462	11	6	16.19	0.36	16.55	30
		9	15.92	0.44	16.36	30
		12	15.82	0.61	16.43	30
		18	15.63	0.87	16.50	30
		24	15.43	1.07	16.50	30
		36	14.97	1.47	16.44	30
		48	14.50	1.89	16.39	30
		54	14.05	2.09	16.15	30
2467	12	6	4.32	0.36	4.68	30
		9	4.01	0.44	4.45	30
		12	3.84	0.61	4.45	30
		18	3.71	0.87	4.58	30
		24	3.59	1.07	4.66	30
		36	3.19	1.47	4.66	30
		48	2.71	1.89	4.60	30
		54	2.28	2.09	4.37	30
2472	13	6	-1.45	0.36	-1.09	30
		9	-1.67	0.44	-1.23	30
		12	-1.83	0.61	-1.22	30
		18	-1.97	0.87	-1.10	30
		24	-2.19	1.07	-1.12	30
		36	-2.61	1.47	-1.14	30
		48	-3.04	1.89	-1.15	30
		54	-3.49	2.09	-1.40	30

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	0	16.01	0.36	16.36	30
		1	15.40	0.66	16.07	30
		2	15.31	0.94	16.25	30
		3	15.11	1.18	16.30	30
		4	14.70	1.51	16.21	30
		5	13.89	2.45	16.34	30
		6	13.47	2.75	16.21	30
		7	13.17	2.99	16.16	30
2417	2	0	17.34	0.36	17.70	30
		1	16.90	0.66	17.56	30
		2	16.69	0.94	17.63	30
		3	16.51	1.18	17.69	30
		4	16.13	1.51	17.65	30
		5	15.24	2.45	17.69	30
		6	14.88	2.75	17.63	30
		7	14.52	2.99	17.51	30
2437	6	0	17.55	0.36	17.90	30
		1	16.87	0.66	17.53	30
		2	16.83	0.94	17.77	30
		3	16.53	1.18	17.71	30
		4	16.32	1.51	17.83	30
		5	15.44	2.45	17.89	30
		6	15.03	2.75	17.78	30
		7	14.65	2.99	17.64	30
2457	10	0	17.30	0.36	17.65	30
		1	16.79	0.66	17.45	30
		2	16.70	0.94	17.64	30
		3	16.40	1.18	17.58	30
		4	16.03	1.51	17.54	30
		5	15.19	2.45	17.64	30
		6	14.80	2.75	17.55	30
		7	14.47	2.99	17.47	30

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2462	11	0	15.53	0.36	15.88	30
		1	14.81	0.66	15.48	30
		2	14.73	0.94	15.67	30
		3	14.43	1.18	15.61	30
		4	14.29	1.51	15.80	30
		5	13.40	2.45	15.85	30
		6	12.95	2.75	15.70	30
		7	12.65	2.99	15.64	30
2467	12	0	4.41	0.36	4.77	30
		1	3.85	0.66	4.51	30
		2	3.74	0.94	4.68	30
		3	3.55	1.18	4.74	30
		4	3.12	1.51	4.64	30
		5	2.29	2.45	4.74	30
		6	1.91	2.75	4.66	30
		7	1.62	2.99	4.61	30
2472	13	0	-1.33	0.36	-0.98	30
		1	-1.79	0.66	-1.13	30
		2	-1.95	0.94	-1.01	30
		3	-2.24	1.18	-1.05	30
		4	-2.66	1.51	-1.14	30
		5	-3.50	2.45	-1.05	30
		6	-3.86	2.75	-1.11	30
		7	-4.15	2.99	-1.16	30

[MIMO]

802.11b Mode		Rate (Mbps)	Ant.1 Measured Power(dBm)	Ant.2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.					
2412	1	1	17.70	17.65	20.68	30
		2	17.82	17.82	20.83	30
		5.5	18.17	18.05	21.12	30
		11	18.71	18.62	21.68	30
2417	2	1	17.78	17.52	20.66	30
		2	18.06	17.80	20.94	30
		5.5	18.38	18.14	21.27	30
		11	18.97	18.68	21.84	30
2437	6	1	17.80	17.84	20.83	30
		2	18.10	18.01	21.07	30
		5.5	18.39	18.26	21.33	30
		11	18.91	18.84	21.88	30
2457	10	1	18.01	17.58	20.81	30
		2	18.16	17.73	20.96	30
		5.5	18.55	17.82	21.21	30
		11	18.97	18.62	21.81	30
2462	11	1	18.06	17.84	20.96	30
		2	18.22	17.93	21.09	30
		5.5	18.59	18.33	21.47	30
		11	18.97	18.78	21.88	30
2467	12	1	4.96	4.79	7.88	30
		2	4.99	4.78	7.90	30
		5.5	5.42	5.13	8.29	30
		11	5.54	5.64	8.60	30
2472	13	1	-0.68	-0.93	2.21	30
		2	-0.68	-0.92	2.21	30
		5.5	-0.29	-0.54	2.60	30
		11	-0.02	-0.04	2.98	30

802.11g Mode		Rate (Mbps)	Ant.1 Measured Power(dBm)	Ant.2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.					
2412	1	6	16.61	16.37	19.50	30
		9	16.44	16.13	19.30	30
		12	16.47	16.18	19.34	30
		18	16.50	16.36	19.44	30
		24	16.47	16.15	19.32	30
		36	16.46	16.18	19.33	30
		48	16.29	16.09	19.20	30
		54	16.00	15.87	18.94	30
2417	2	6	17.08	16.57	19.84	30
		9	16.56	16.52	19.55	30
		12	16.33	16.53	19.44	30
		18	17.03	16.51	19.79	30
		24	16.79	16.56	19.69	30
		36	16.75	16.46	19.62	30
		48	16.82	16.40	19.63	30
		54	16.42	16.13	19.29	30
2437	6	6	16.88	17.05	19.98	30
		9	16.80	16.77	19.79	30
		12	16.86	16.86	19.87	30
		18	16.87	17.04	19.97	30
		24	16.74	16.90	19.83	30
		36	16.71	16.86	19.79	30
		48	16.63	16.80	19.72	30
		54	16.49	16.51	19.51	30
2457	10	6	17.14	16.54	19.86	30
		9	16.56	16.46	19.52	30
		12	17.06	16.48	19.79	30
		18	17.12	15.75	19.50	30
		24	16.91	16.36	19.65	30
		36	16.88	16.42	19.66	30
		48	16.79	16.32	19.57	30
		54	16.24	16.01	19.14	30

802.11g Mode		Rate (Mbps)	Ant.1 Measured Power(dBm)	Ant.2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.					
2462	11	6	16.85	16.55	19.71	30
		9	16.68	16.36	19.53	30
		12	16.77	16.43	19.62	30
		18	16.83	16.50	19.68	30
		24	16.82	16.50	19.67	30
		36	16.79	16.44	19.63	30
		48	16.71	16.39	19.56	30
		54	16.45	16.15	19.31	30
2467	12	6	5.03	4.68	7.87	30
		9	4.72	4.45	7.60	30
		12	4.74	4.45	7.61	30
		18	4.86	4.58	7.74	30
		24	5.00	4.66	7.85	30
		36	4.99	4.66	7.84	30
		48	4.96	4.60	7.79	30
		54	4.72	4.37	7.56	30
2472	13	6	-0.87	-1.09	2.03	30
		9	-1.02	-1.23	1.88	30
		12	-1.02	-1.22	1.90	30
		18	-0.90	-1.10	2.01	30
		24	-0.89	-1.12	2.01	30
		36	-0.91	-1.14	1.99	30
		48	-0.96	-1.15	1.96	30
		54	-1.16	-1.40	1.73	30

802.11n(HT20) Mode		MCS Index	Ant.1 Measured Power(dBm)	Ant.2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.					
2412	1	0	16.50	16.36	19.44	30
		1	16.17	16.07	19.13	30
		2	16.30	16.25	19.29	30
		3	16.30	16.30	19.31	30
		4	16.39	16.21	19.31	30
		5	16.44	16.34	19.40	30
		6	16.34	16.21	19.29	30
		7	16.26	16.16	19.22	30
2417	2	0	17.94	17.70	20.83	30
		1	17.76	17.56	20.67	30
		2	17.84	17.63	20.75	30
		3	17.85	17.69	20.78	30
		4	17.90	17.65	20.79	30
		5	17.93	17.69	20.82	30
		6	17.87	17.63	20.76	30
		7	17.74	17.51	20.64	30
2437	6	0	17.81	17.90	20.87	30
		1	17.54	17.53	20.55	30
		2	17.71	17.77	20.75	30
		3	17.65	17.71	20.69	30
		4	17.74	17.83	20.80	30
		5	17.80	17.89	20.86	30
		6	17.65	17.78	20.72	30
		7	17.65	17.64	20.65	30
2457	10	0	17.91	17.65	20.79	30
		1	17.75	17.45	20.61	30
		2	17.85	17.64	20.75	30
		3	17.90	17.58	20.76	30
		4	17.85	17.54	20.71	30
		5	17.90	17.64	20.78	30
		6	17.90	17.55	20.74	30
		7	17.74	17.47	20.62	30

802.11n(HT20) Mode		MCS Index	Ant.1 Measured Power(dBm)	Ant.2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.					
2462	11	0	15.99	15.88	18.95	30
		1	15.62	15.48	18.56	30
		2	15.91	15.67	18.80	30
		3	15.88	15.61	18.76	30
		4	15.95	15.80	18.89	30
		5	15.97	15.85	18.92	30
		6	15.92	15.70	18.82	30
		7	15.85	15.64	18.76	30
2467	12	0	5.15	4.77	7.97	30
		1	4.84	4.51	7.69	30
		2	5.00	4.68	7.85	30
		3	5.09	4.74	7.93	30
		4	5.00	4.64	7.83	30
		5	5.13	4.74	7.95	30
		6	5.06	4.66	7.87	30
		7	4.96	4.61	7.80	30
2472	13	0	-0.73	-0.98	2.16	30
		1	-0.97	-1.13	1.96	30
		2	-0.79	-1.01	2.11	30
		3	-0.82	-1.05	2.08	30
		4	-0.92	-1.14	1.98	30
		5	-0.81	-1.05	2.08	30
		6	-0.88	-1.11	2.02	30
		7	-0.99	-1.16	1.94	30

9.4 POWER SPECTRAL DENSITY

[Ant.1]

Mode	Frequency (MHz)	Channel No.	Test Result			Limit (dBm)
			Measured PSD (dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	
802.11b	2412	1	-2.567	1.305	-1.262	8 dBm / 3 kHz
	2417	2	-2.825	1.305	-1.520	
	2437	6	-2.463	1.305	-1.158	
	2457	10	-1.638	1.305	-0.333	
	2462	11	-2.789	1.305	-1.484	
	2467	12	-15.529	1.305	-14.224	
	2472	13	-21.326	1.305	-20.021	
802.11g	2412	1	-6.868	0.362	-6.506	
	2417	2	-6.441	0.362	-6.079	
	2437	6	-6.610	0.362	-6.248	
	2457	10	-6.066	0.362	-5.704	
	2462	11	-6.436	0.362	-6.074	
	2467	12	-17.960	0.362	-17.598	
	2472	13	-24.525	0.362	-24.163	
802.11n(HT20)	2412	1	-7.251	0.356	-6.895	
	2417	2	-5.906	0.356	-5.550	
	2437	6	-5.983	0.356	-5.627	
	2457	10	-5.860	0.356	-5.504	
	2462	11	-7.712	0.356	-7.356	
	2467	12	-18.722	0.356	-18.366	
	2472	13	-24.629	0.356	-24.273	

[Ant.2]

Mode	Frequency (MHz)	Channel No.	Test Result			Limit (dBm)
			Measured PSD (dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	
802.11b	2412	1	-3.060	1.305	-1.755	8 dBm / 3 kHz
	2417	2	-2.810	1.305	-1.505	
	2437	6	-2.900	1.305	-1.595	
	2457	10	-2.765	1.305	-1.460	
	2462	11	-2.963	1.305	-1.658	
	2467	12	-16.104	1.305	-14.799	
	2472	13	-21.757	1.305	-20.452	
802.11g	2412	1	-6.960	0.362	-6.598	
	2417	2	-6.915	0.362	-6.553	
	2437	6	-6.578	0.362	-6.216	
	2457	10	-7.237	0.362	-6.875	
	2462	11	-7.007	0.362	-6.645	
	2467	12	-18.951	0.362	-18.589	
	2472	13	-24.660	0.362	-24.298	
802.11n(HT20)	2412	1	-7.236	0.356	-6.880	
	2417	2	-6.072	0.356	-5.716	
	2437	6	-6.098	0.356	-5.742	
	2457	10	-5.680	0.356	-5.324	
	2462	11	-7.714	0.356	-7.358	
	2467	12	-18.871	0.356	-18.515	
	2472	13	-24.582	0.356	-24.226	

[MIMO]

Mode	Frequency (MHz)	Channel No.	Test Result			Limit (dBm)
			Ant.1 Measured Power(dBm) + Duty Cycle Factor	Ant.2 Measured Power(dBm) + Duty Cycle Factor	MIMO Total P.S.D (dBm)	
802.11b	2412	1	-1.262	-1.755	1.509	8 dBm / 3 kHz
	2417	2	-1.520	-1.505	1.498	
	2437	6	-1.158	-1.595	1.639	
	2457	10	-0.333	-1.460	2.150	
	2462	11	-1.484	-1.658	1.440	
	2467	12	-14.224	-14.799	-11.491	
	2472	13	-20.021	-20.452	-17.221	
802.11g	2412	1	-6.506	-6.598	-3.542	
	2417	2	-6.079	-6.553	-3.300	
	2437	6	-6.248	-6.216	-3.222	
	2457	10	-5.704	-6.875	-3.240	
	2462	11	-6.074	-6.645	-3.340	
	2467	12	-17.598	-18.589	-15.055	
	2472	13	-24.163	-24.298	-21.220	
802.11n(HT20)	2412	1	-6.895	-6.880	-3.877	
	2417	2	-5.550	-5.716	-2.622	
	2437	6	-5.627	-5.742	-2.674	
	2457	10	-5.504	-5.324	-2.403	
	2462	11	-7.356	-7.358	-4.347	
	2467	12	-18.366	-18.515	-15.430	
	2472	13	-24.273	-24.226	-21.239	

Note :

1. Spectrum Measured Levels are not plot data.


The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset Loss = Attenuator loss(20 dB) + Cable loss + EUT Cable loss


[Ant.1]

▣ Test Plots


Power Spectral Density (802.11b 11Mbps CH 10)

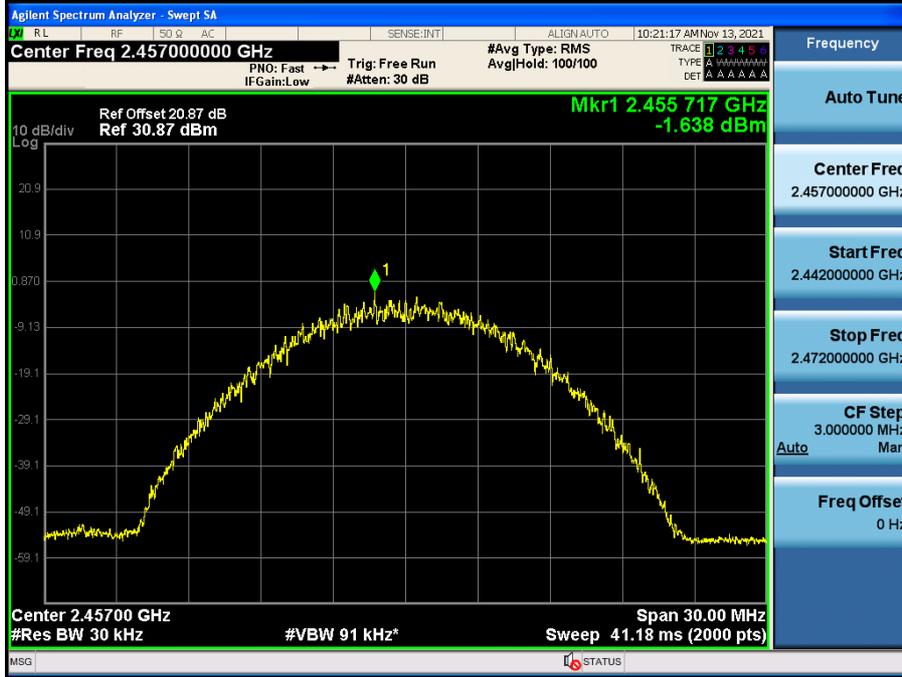

Power Spectral Density (802.11g 6Mbps CH 6)

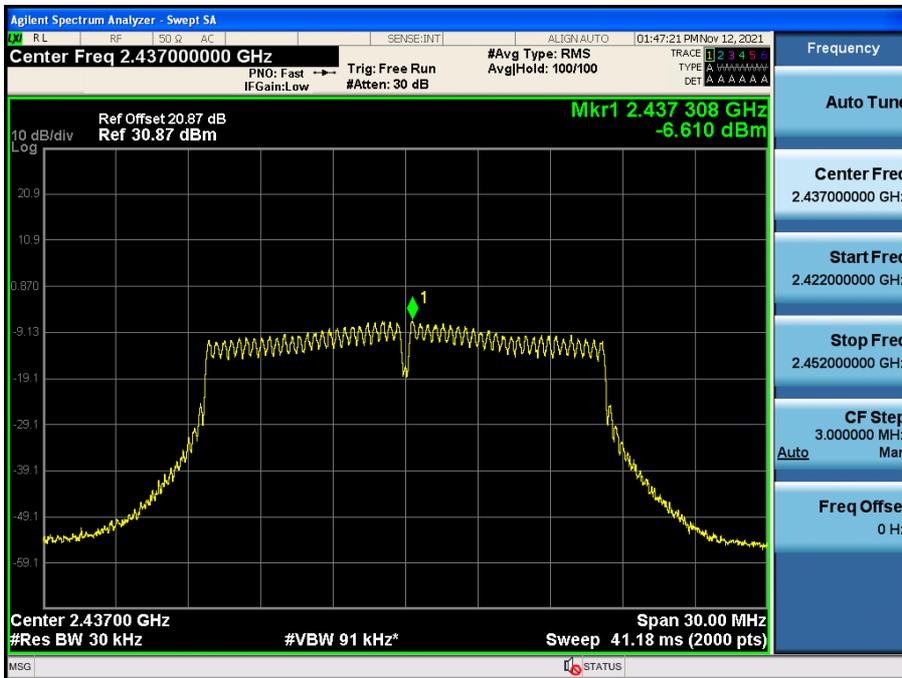


Power Spectral Density (802.11n_HT20 MCS0 CH 10)

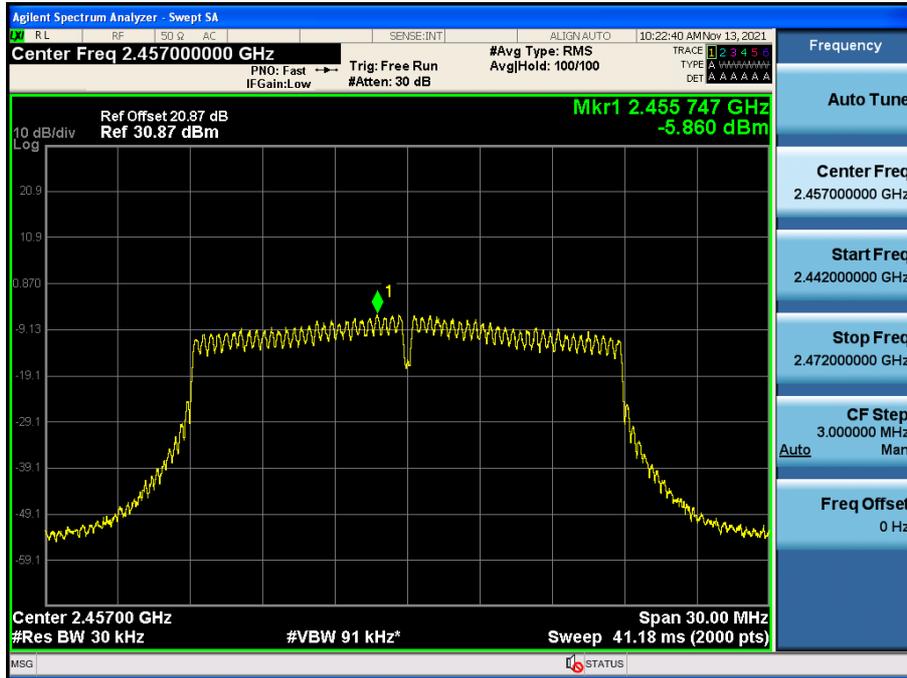


[Ant.2]

▣ Test Plots

Power Spectral Density (802.11b 11Mbps CH 10)

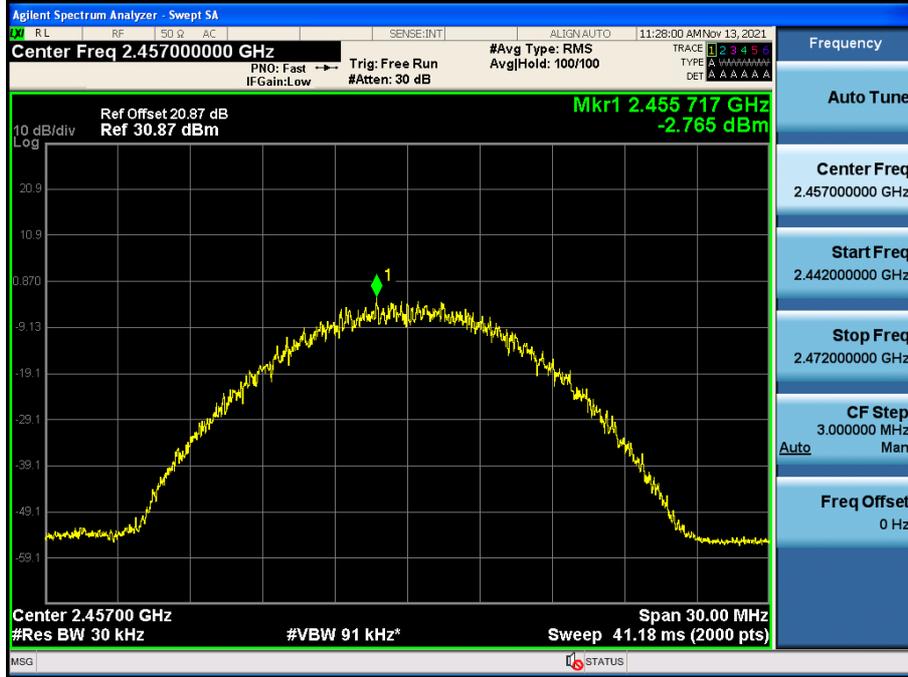

Power Spectral Density (802.11g 6Mbps CH 6)

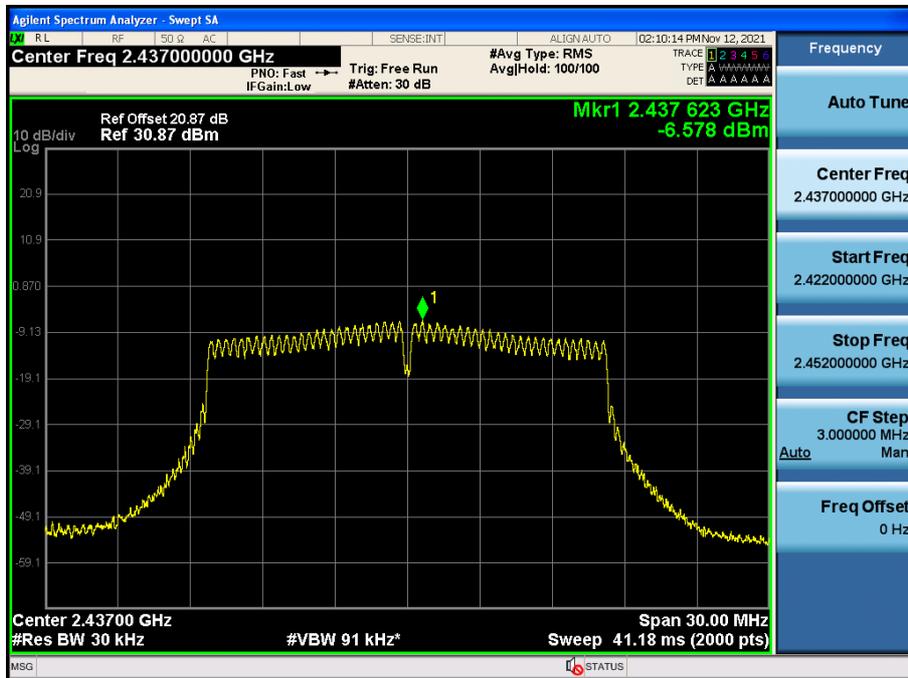

Power Spectral Density (802.11n_HT20 MCS0 CH 10)



Note :

In order to simplify the report, attached plots were only the worst case PSD channel.

9.5 BAND EDGE / CONDUCTED SPURIOUS EMISSIONS


Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.


[Ant.1]

▣ Test Plots(Band Edge)


Band Edge (802.11b 11Mbps CH1)

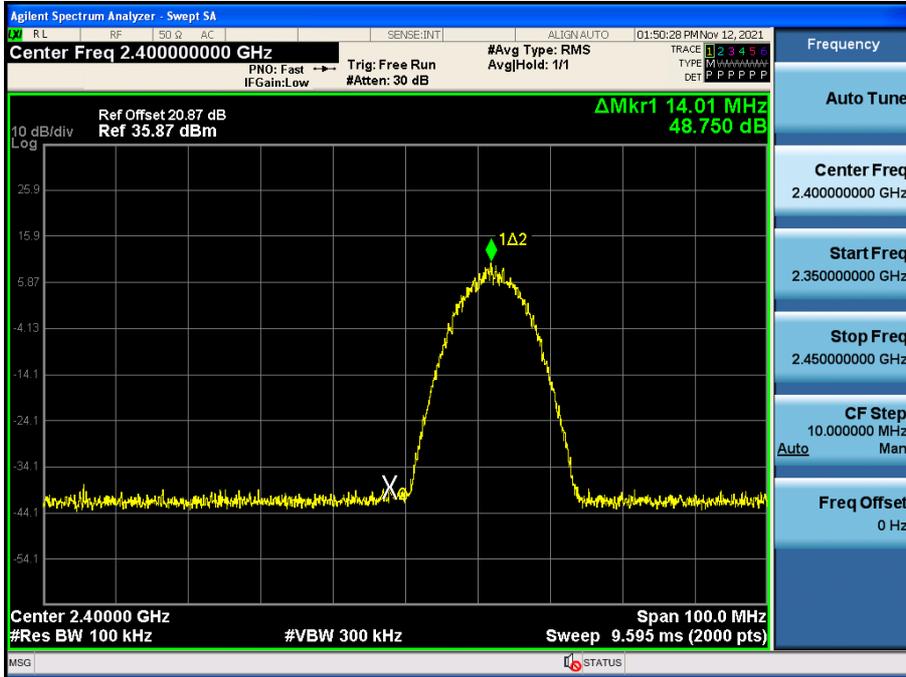


Band Edge (80211b 11Mbps CH2)

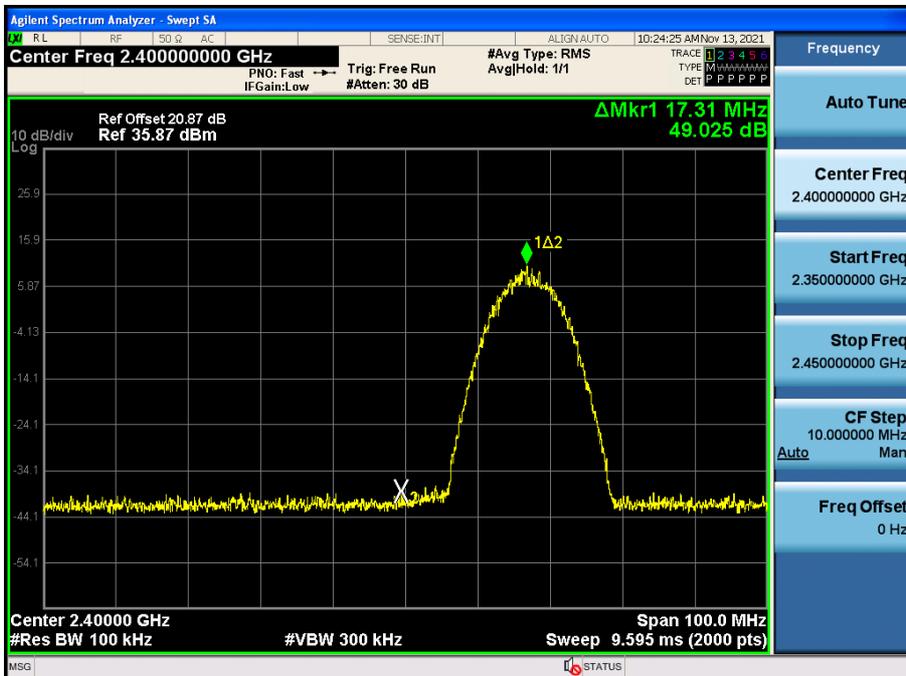


Band Edge (802.11b 11Mbps CH10)

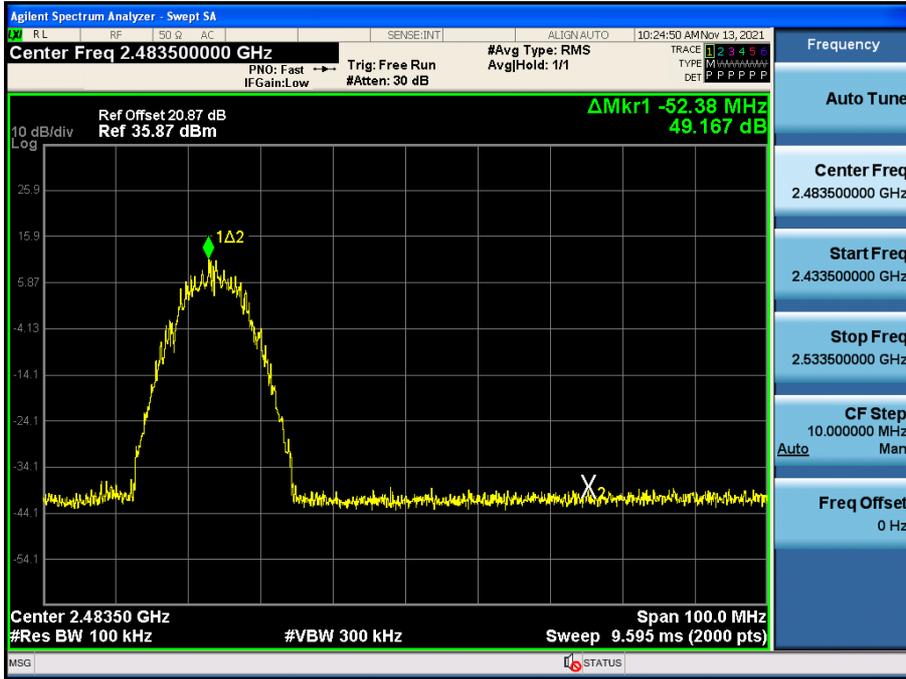


Band Edge (802.11b 11Mbps CH11)

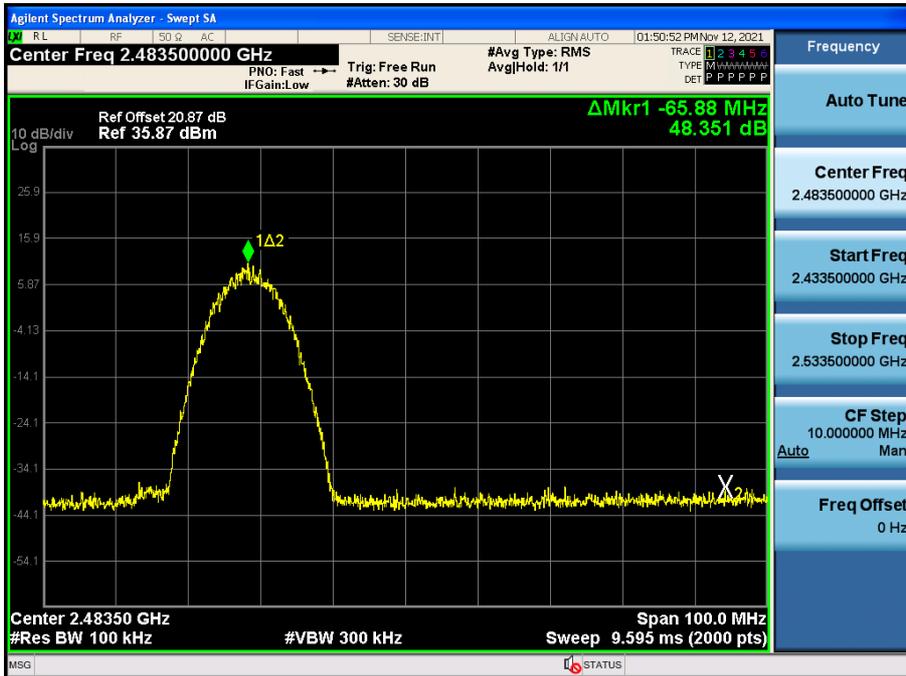


Band Edge (802.11b 11Mbps CH12)

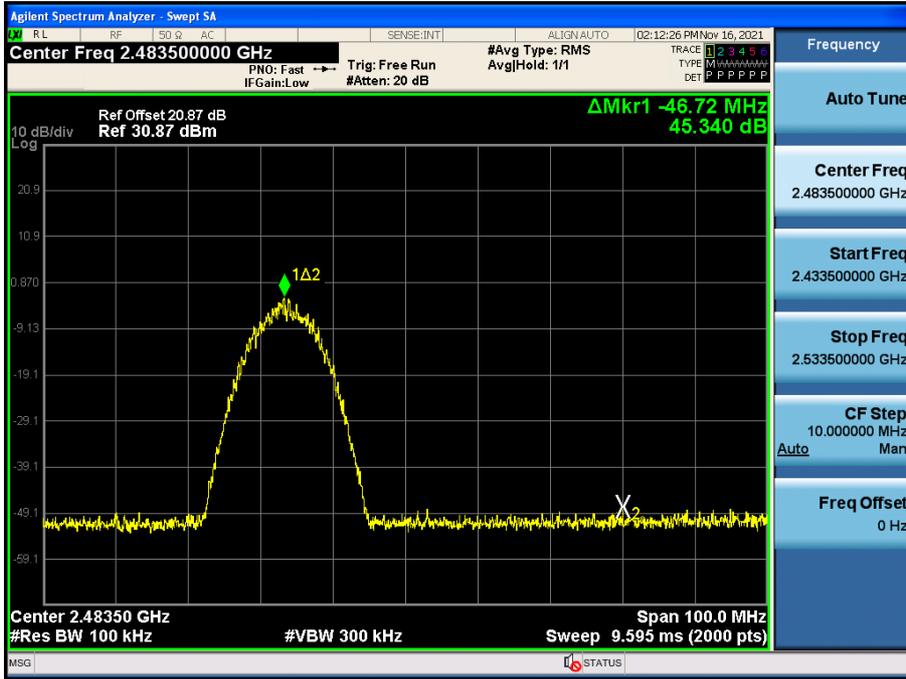


Band Edge (802.11b 11Mbps CH13)

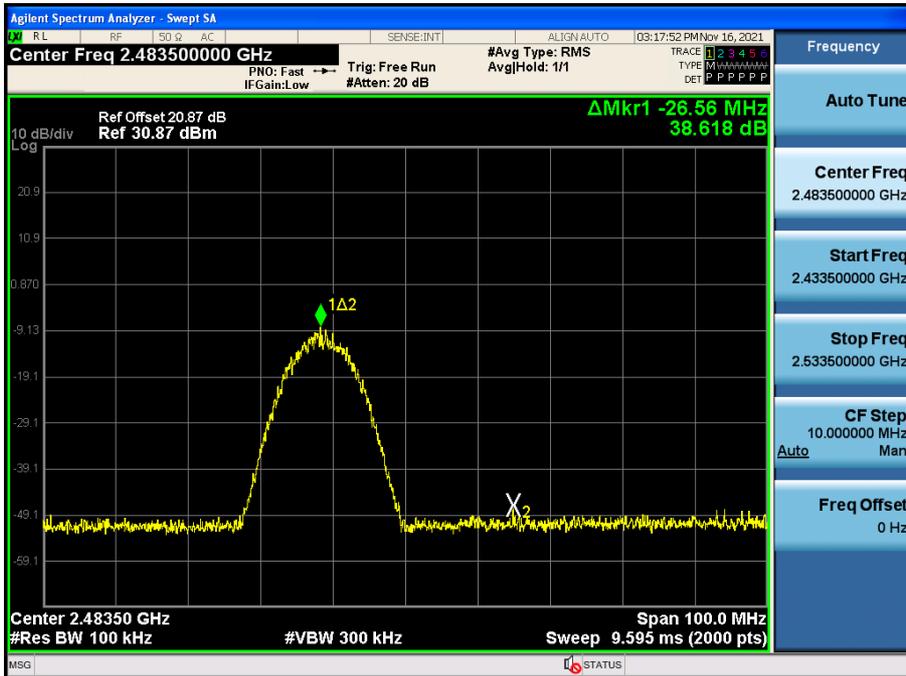


Band Edge (802.11g 6Mbps CH1)

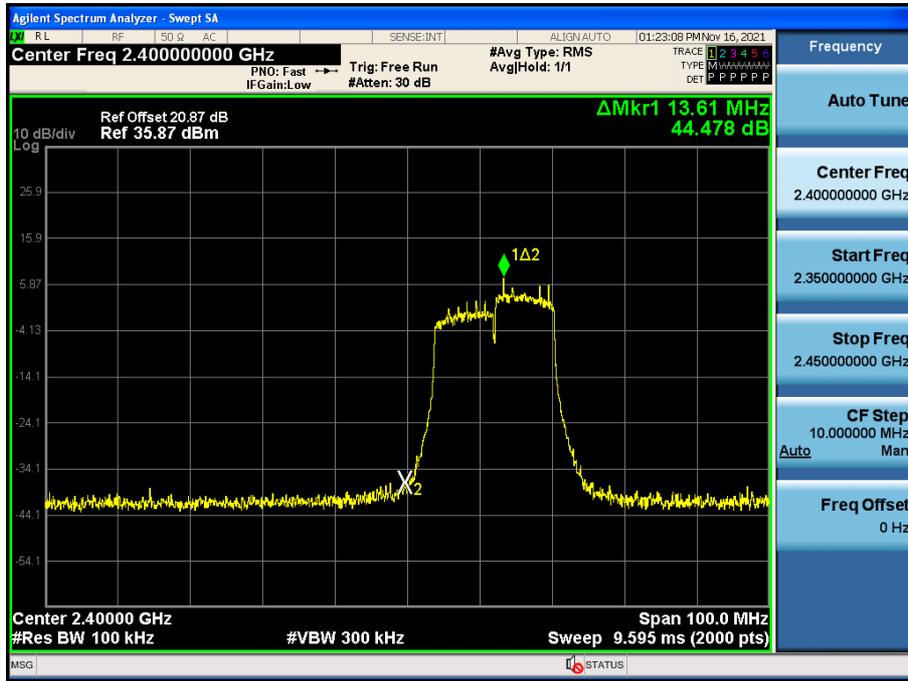


Band Edge (802.11g 6Mbps CH2)

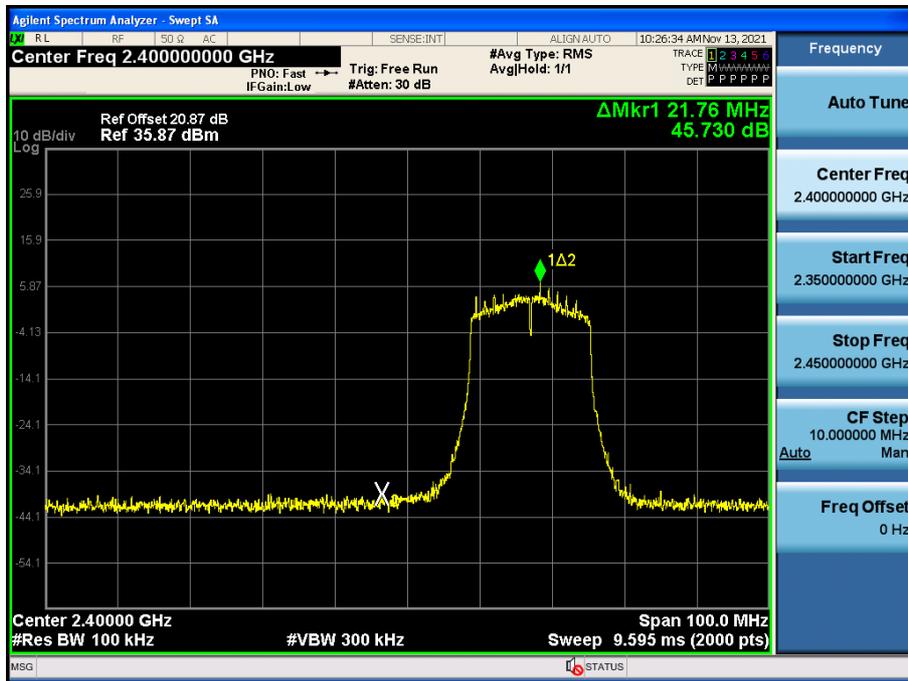


Band Edge (802.11g 6Mbps CH10)

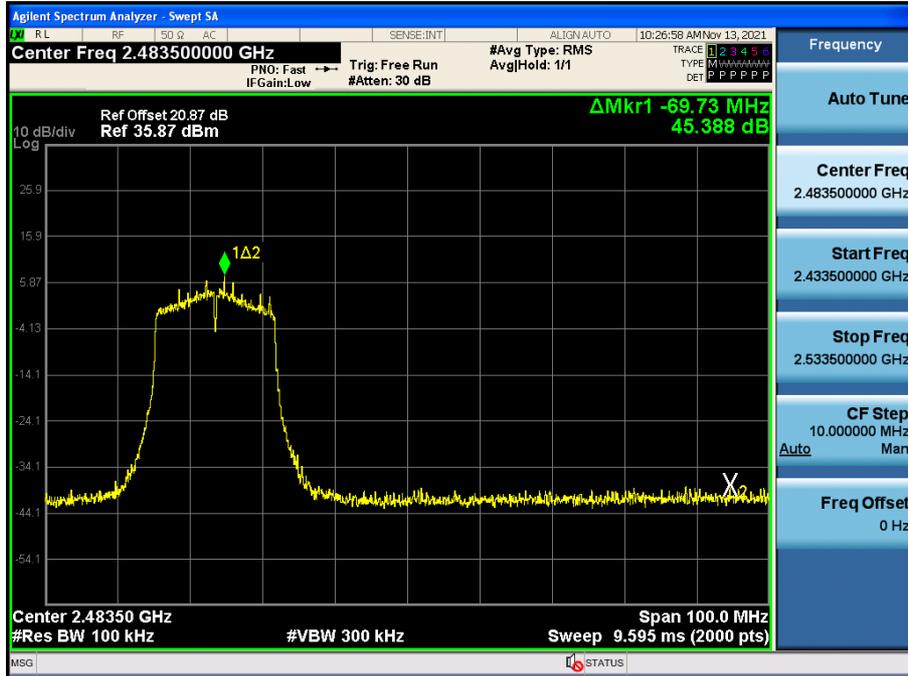


Band Edge (802.11g 6Mbps CH11)

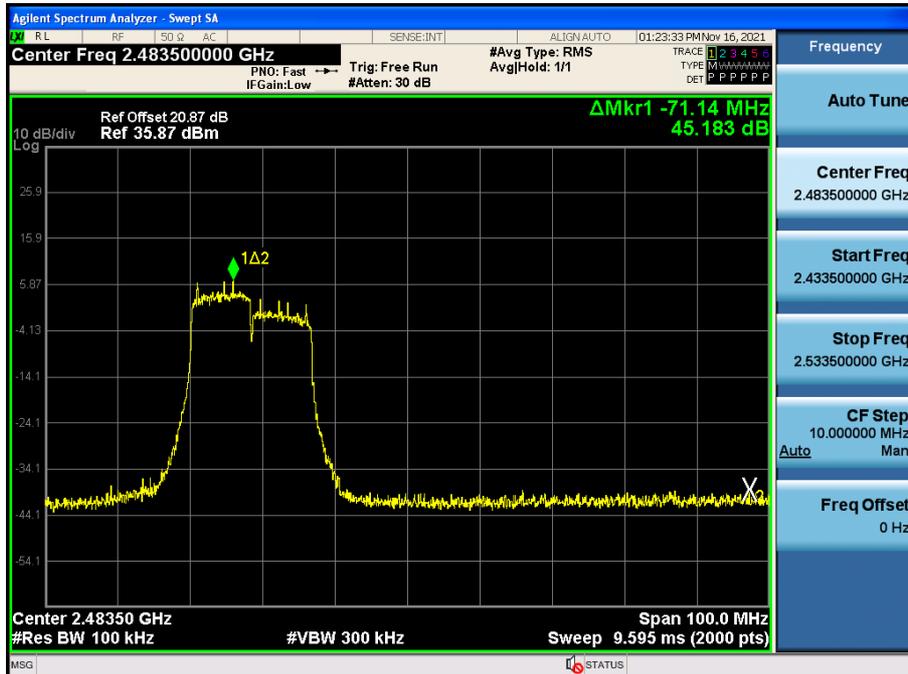


Band Edge (802.11g 6Mbps CH12)

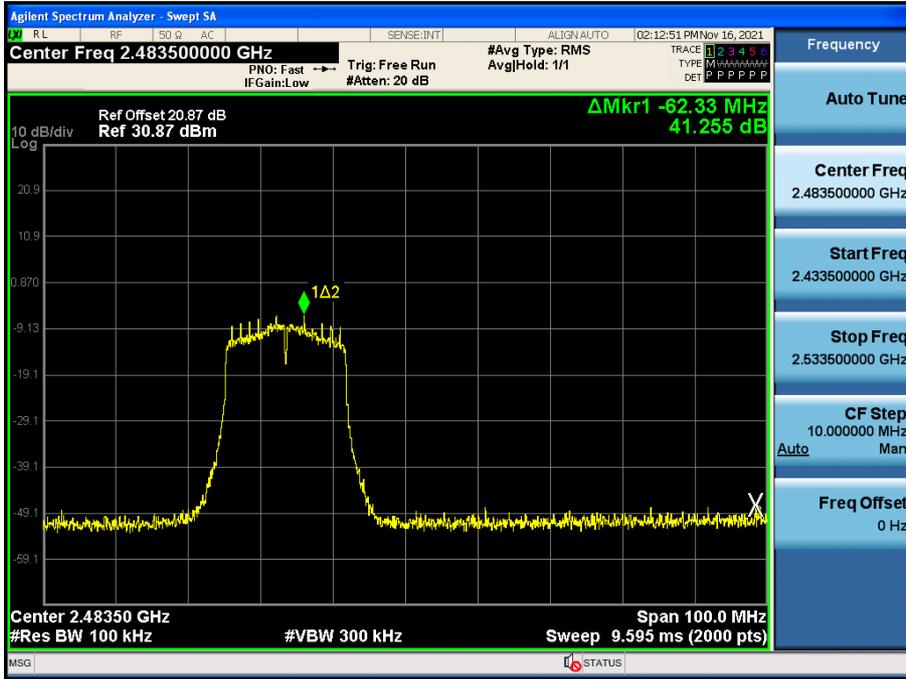


Band Edge (802.11g 6Mbps CH13)

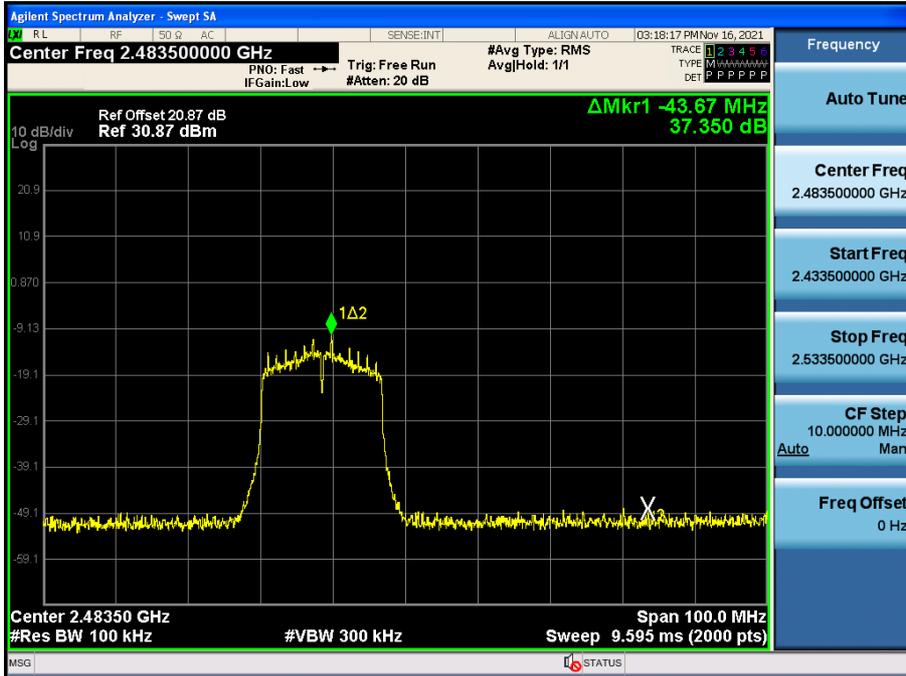


Band Edge (802.11n_HT20 MCS0 CH1)

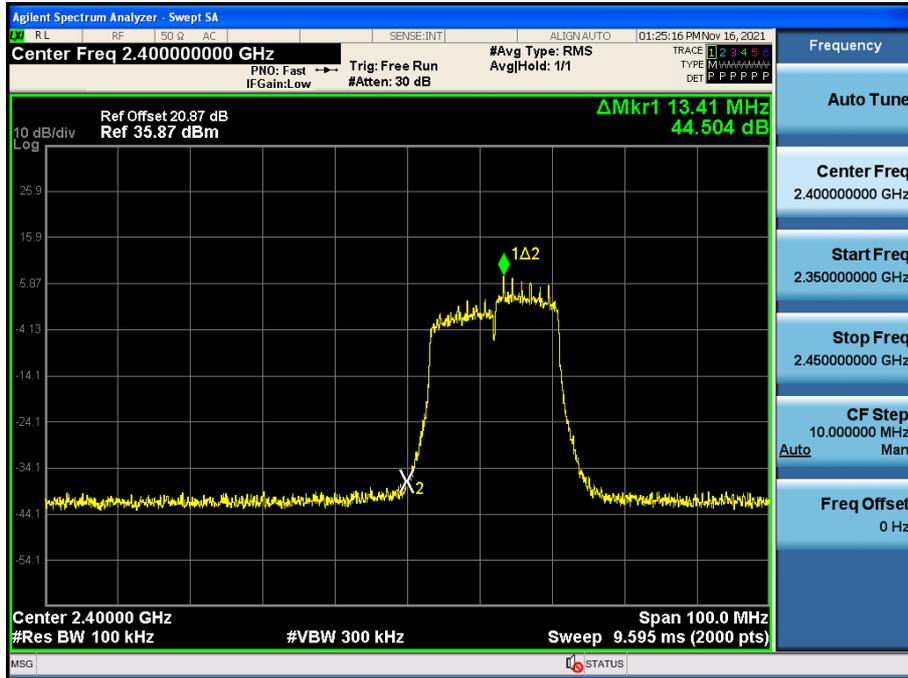


Band Edge (802.11n_HT20 MCS0 CH2)

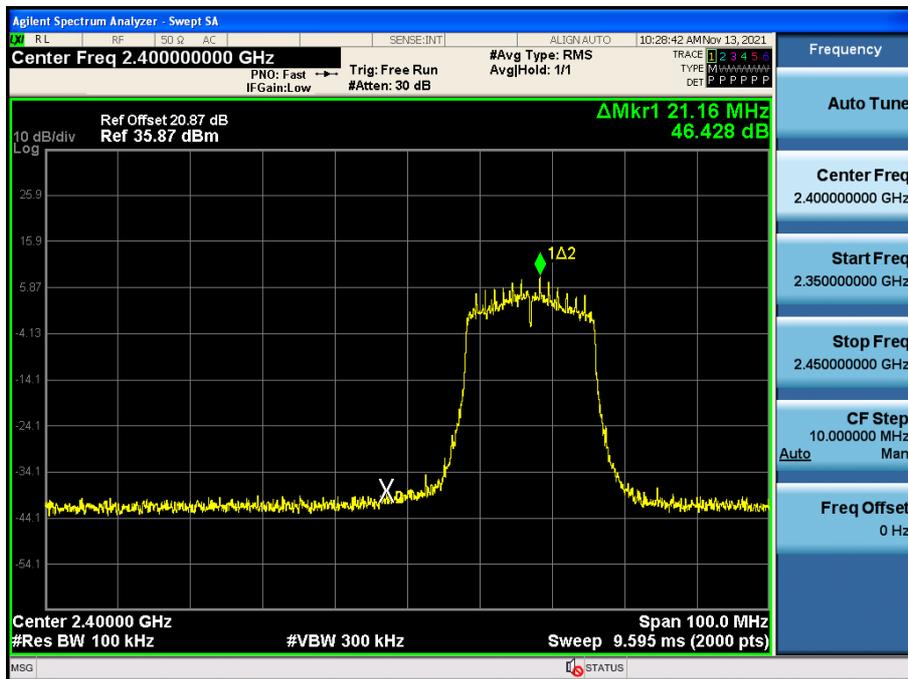


Band Edge (802.11n_HT20 MCS0 CH10)

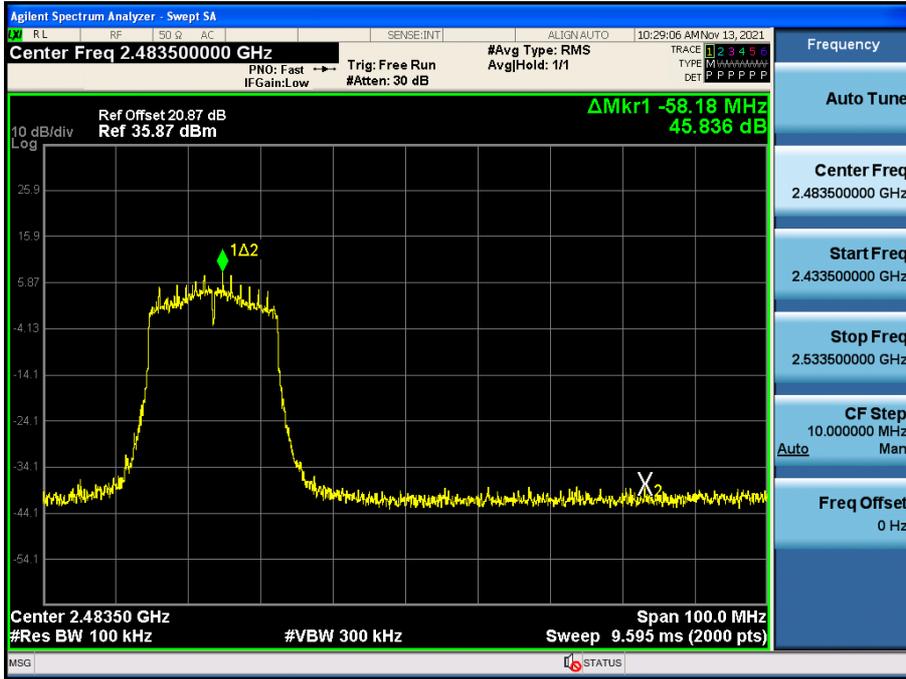


Band Edge (802.11n_HT20 MCS0 CH11)

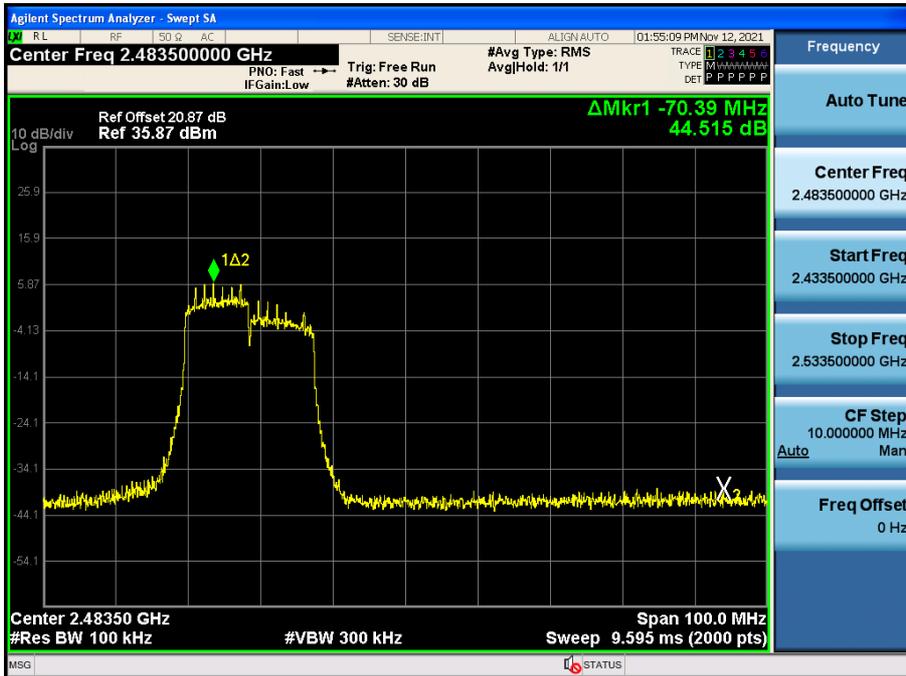

Band Edge (802.11n_HT20 MCS0 CH12)

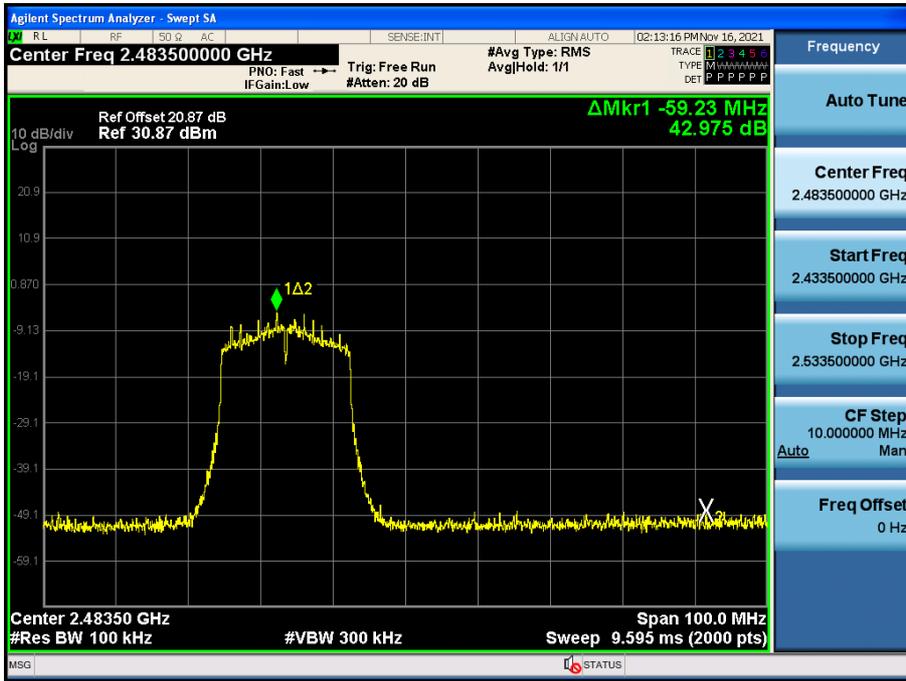


Band Edge (802.11n_HT20 MCS0 CH13)

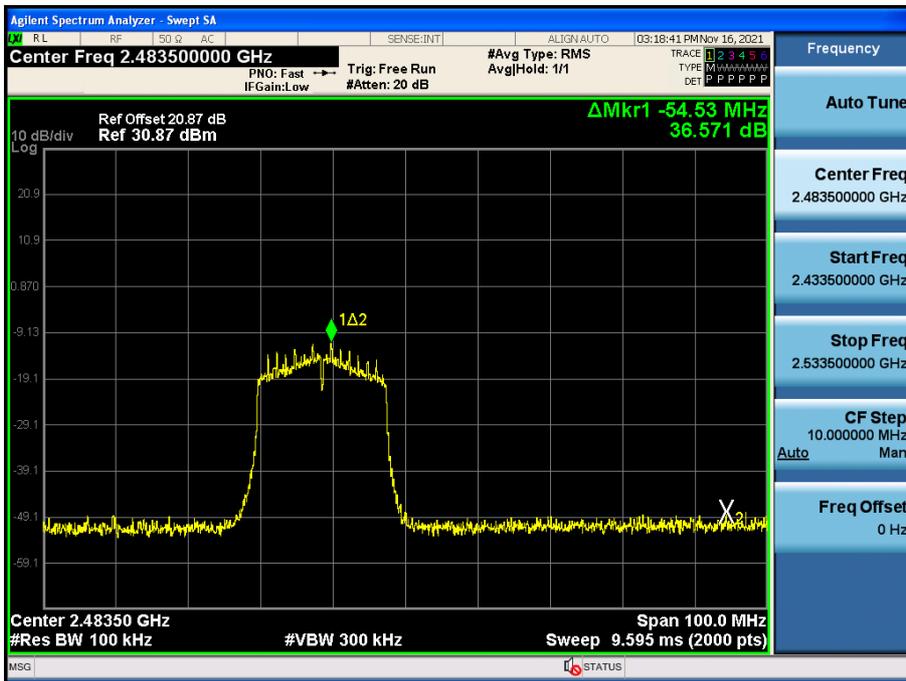


[Ant.2]

☑ Test Plots(Band Edge)


Band Edge (802.11b 11Mbps CH1)

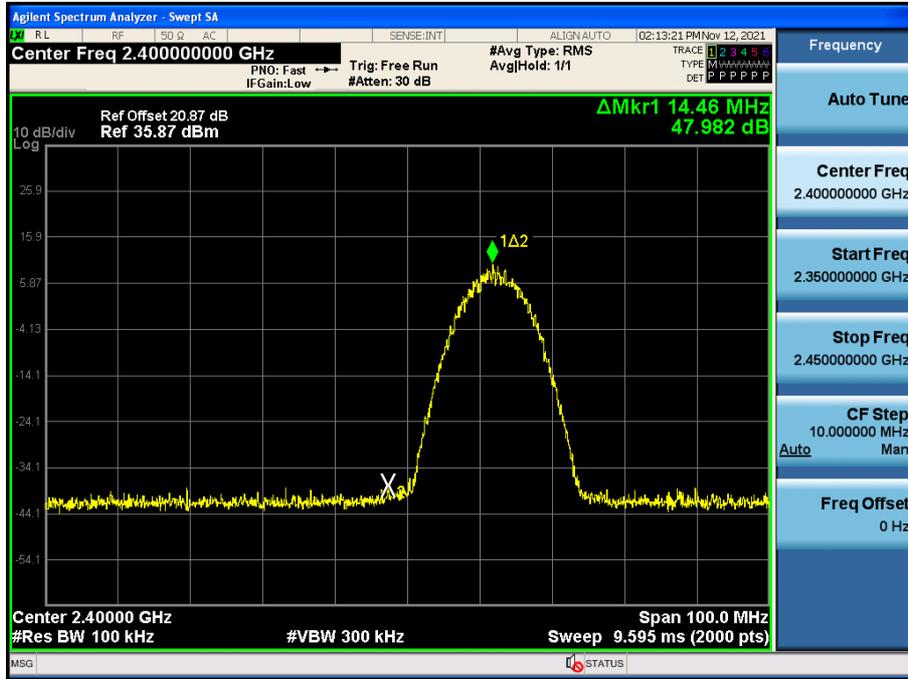


Band Edge (802.11b 11Mbps CH2)

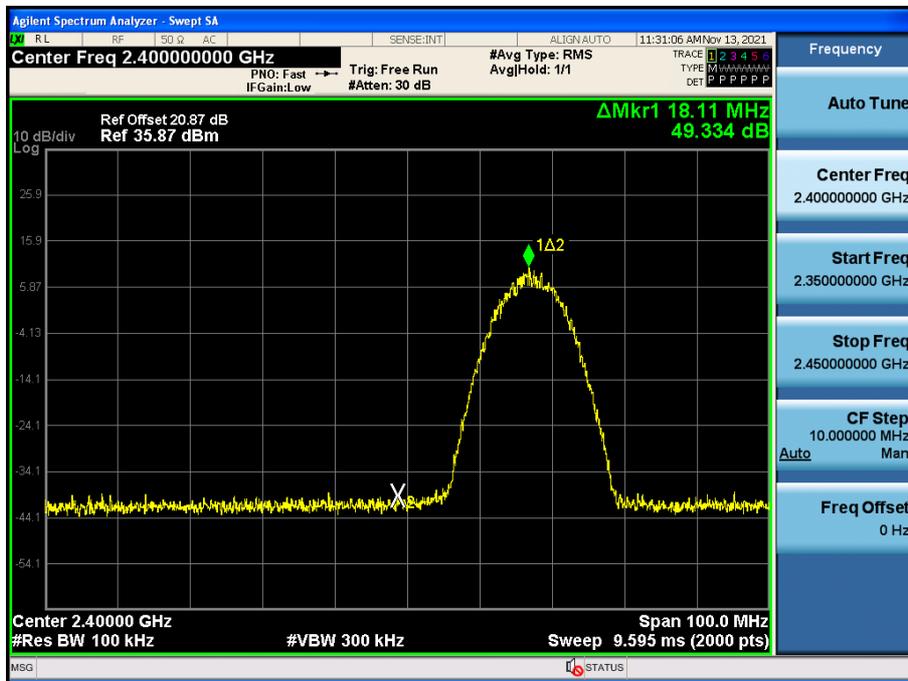


Band Edge (802.11b 11Mbps CH10)

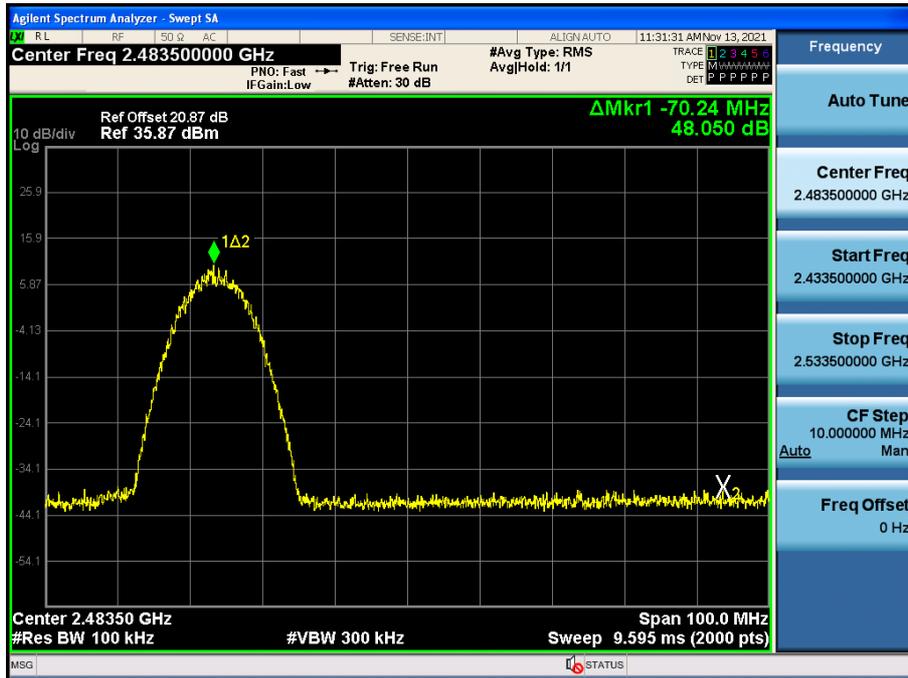


Band Edge (802.11b 11Mbps CH11)

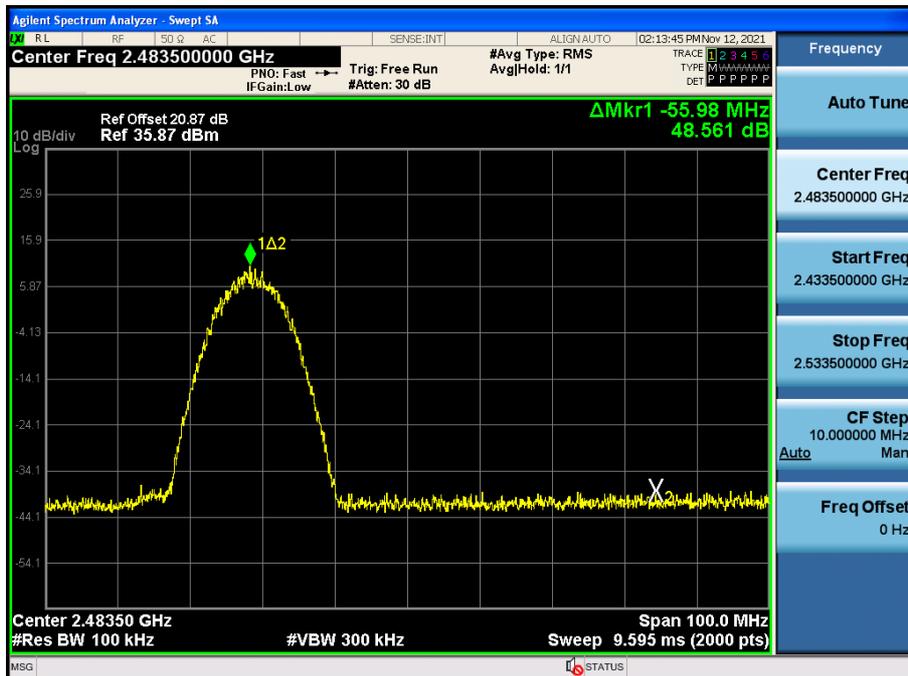


Band Edge (802.11b 11Mbps CH12)

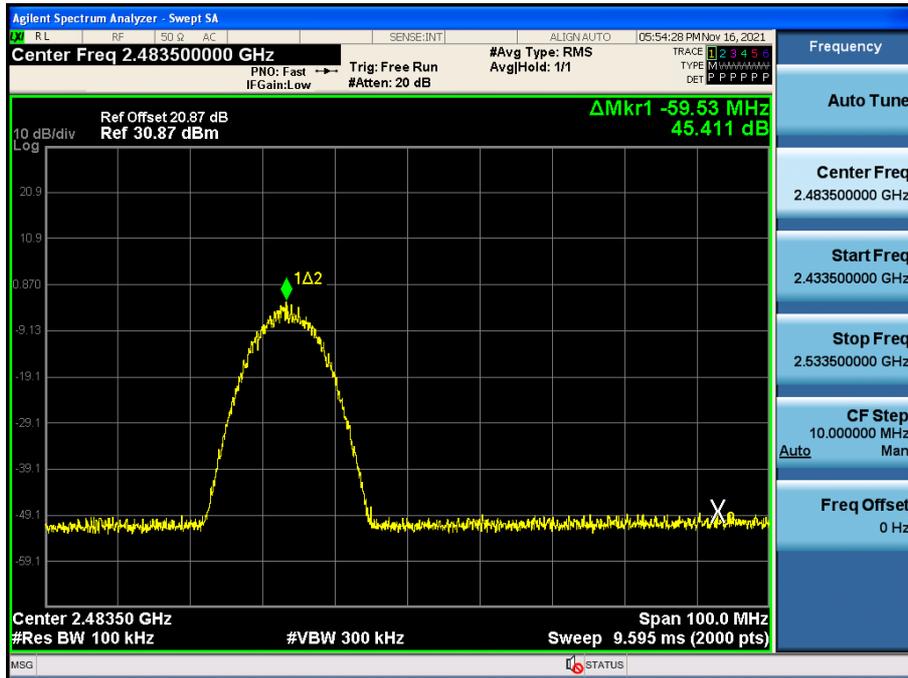


Band Edge (802.11b 11Mbps CH13)

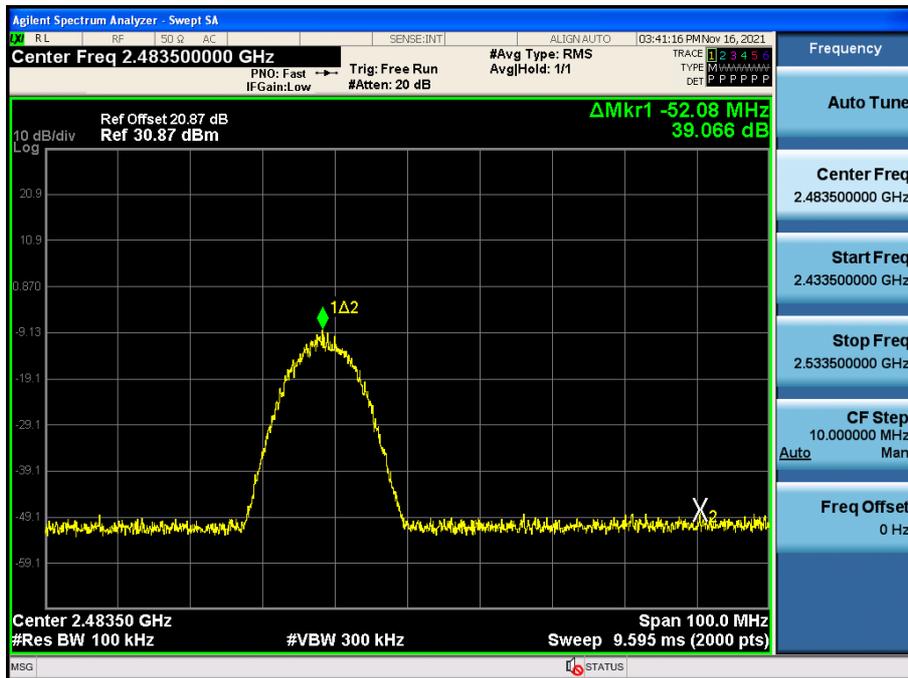


Band Edge (802.11g 6Mbps CH1)

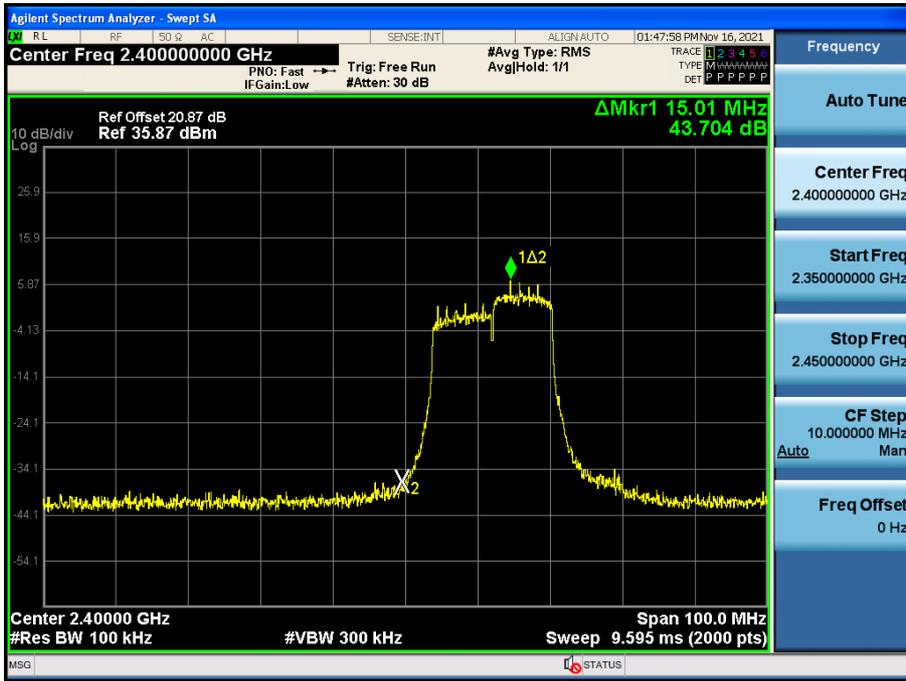


Band Edge (802.11g 6Mbps CH2)

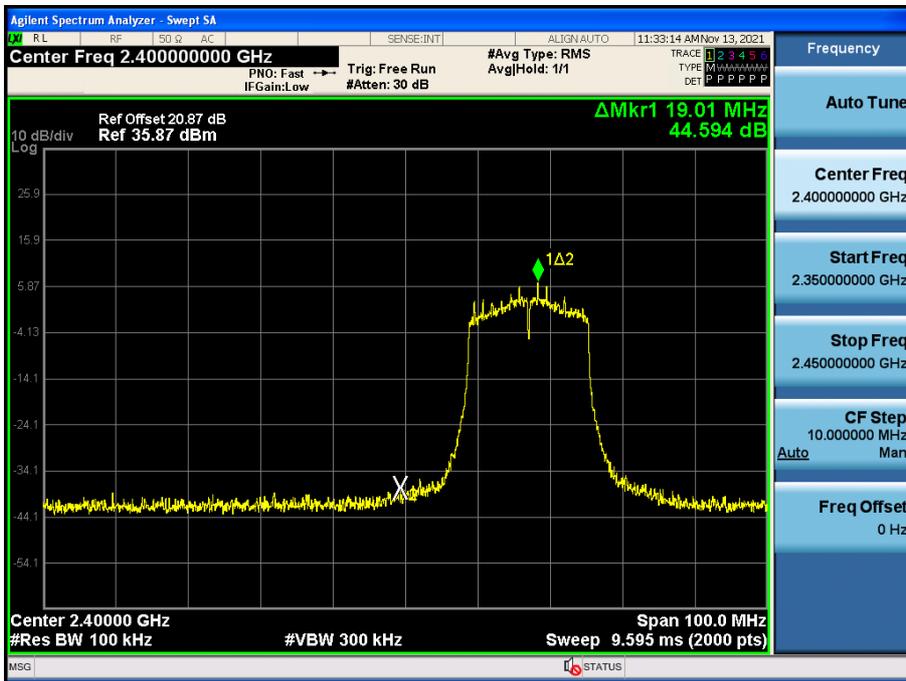


Band Edge (802.11g 6Mbps CH10)

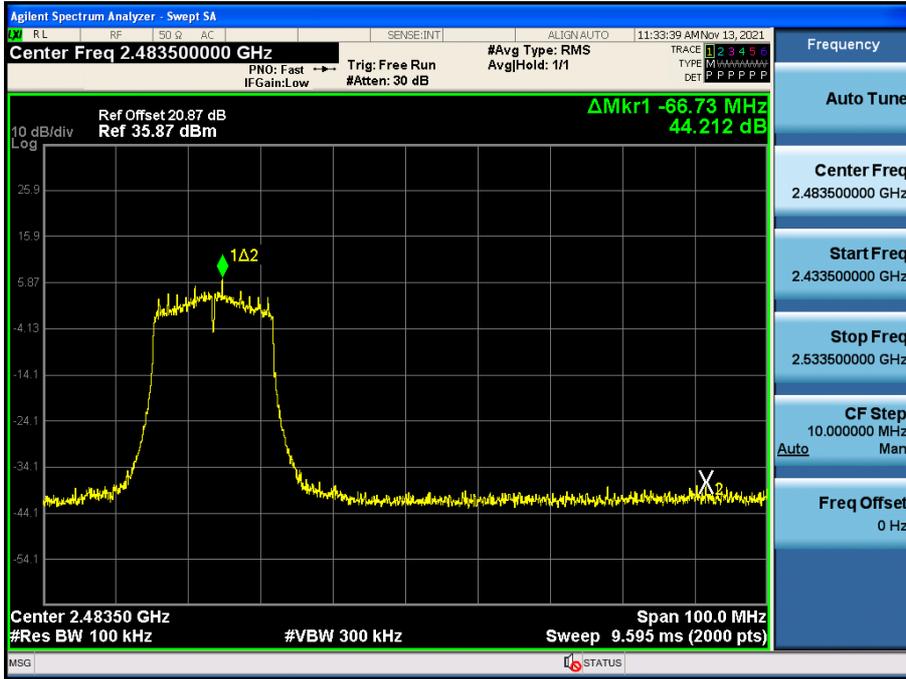


Band Edge (802.11g 6Mbps CH11)

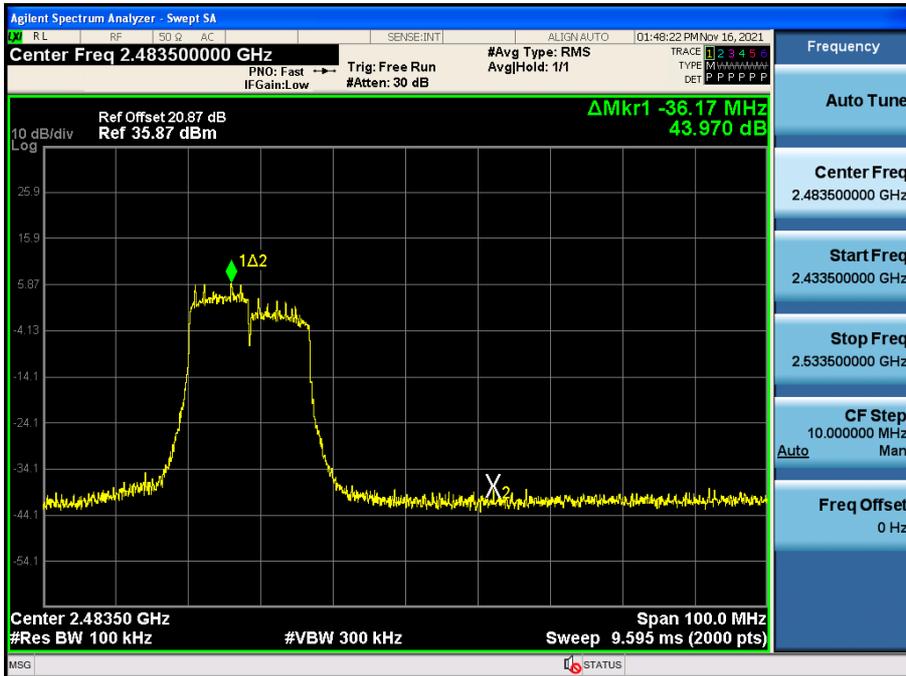


Band Edge (802.11g 6Mbps CH12)

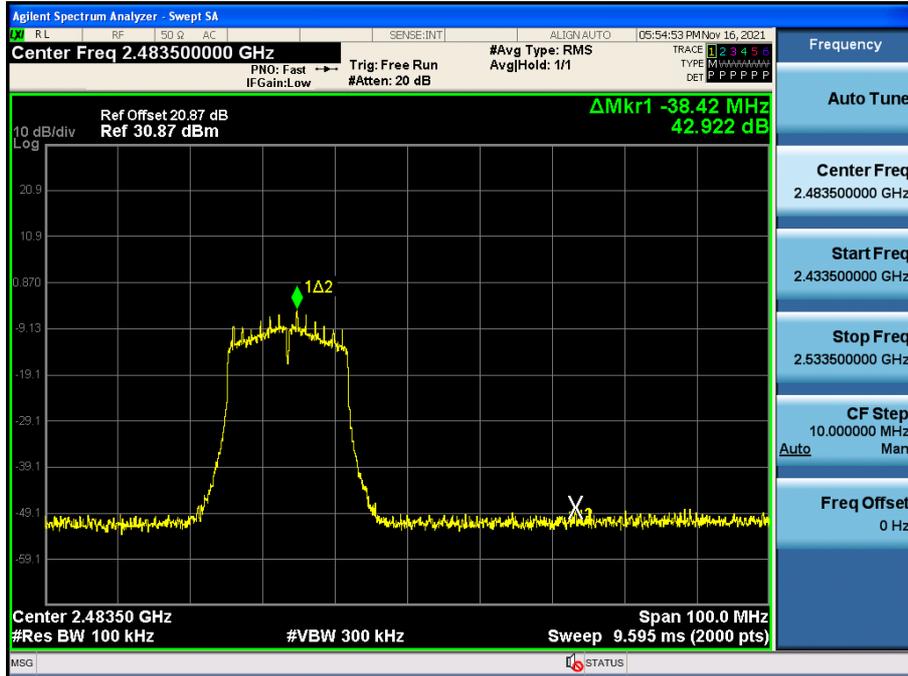


Band Edge (802.11g 6Mbps CH13)

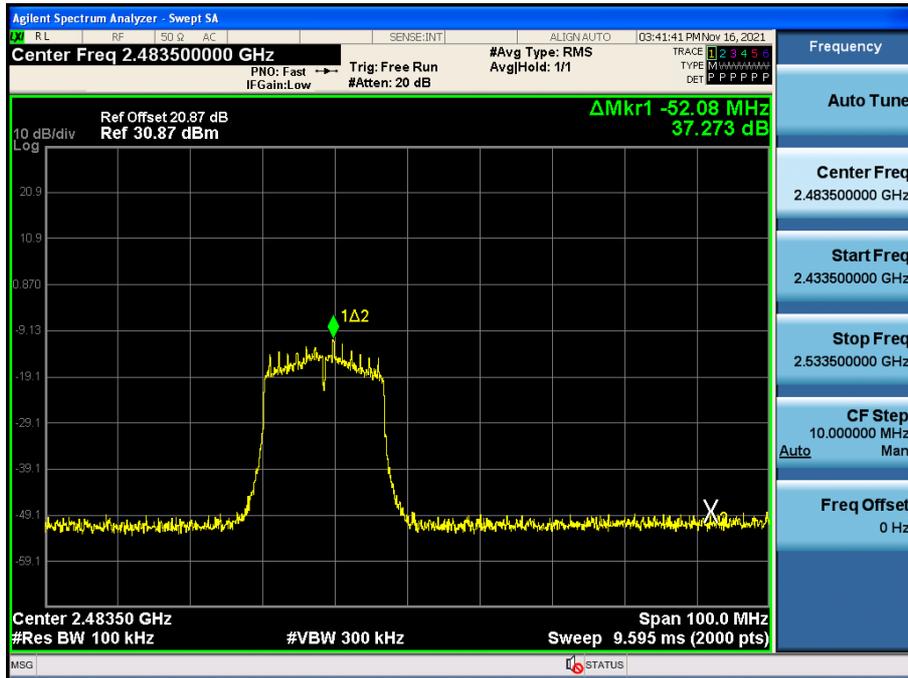


Band Edge (802.11n_HT20 MCS0 CH1)

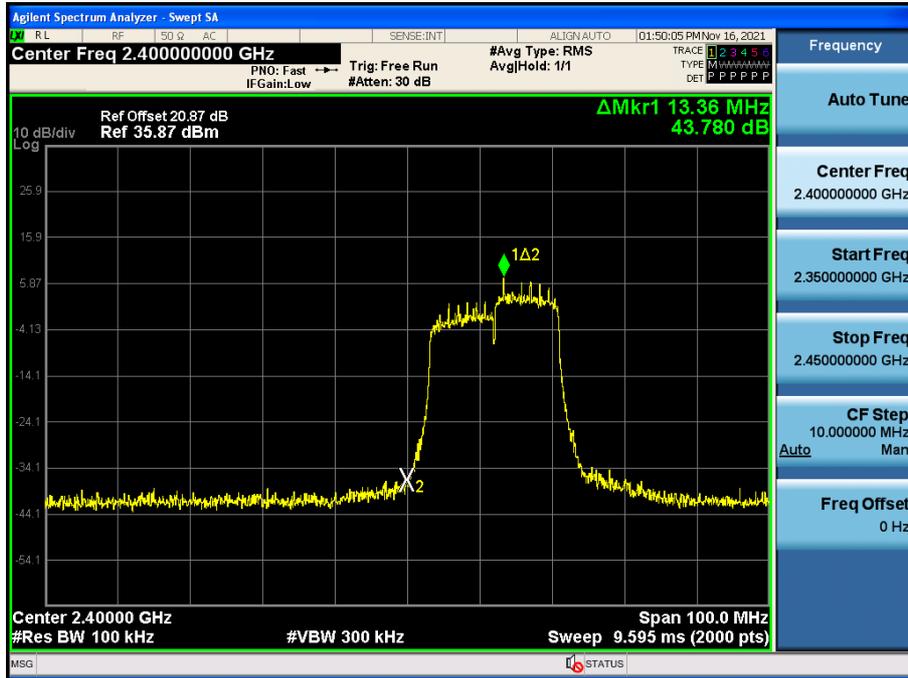


Band Edge (802.11n_HT20 MCS0 CH2)

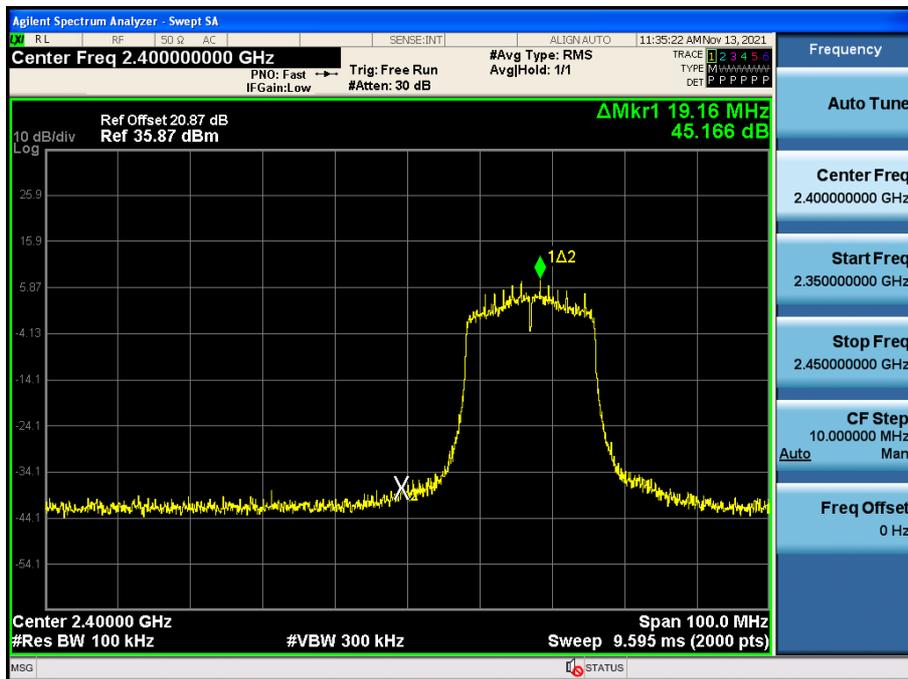


Band Edge (802.11n_HT20 MCS0 CH10)

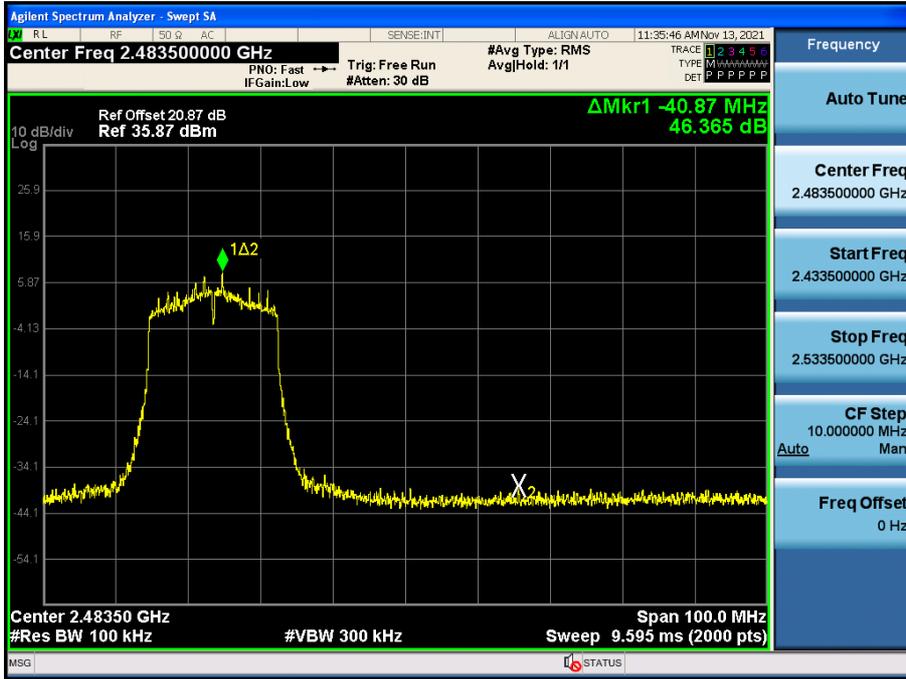


Band Edge (802.11n_HT20 MCS0 CH11)

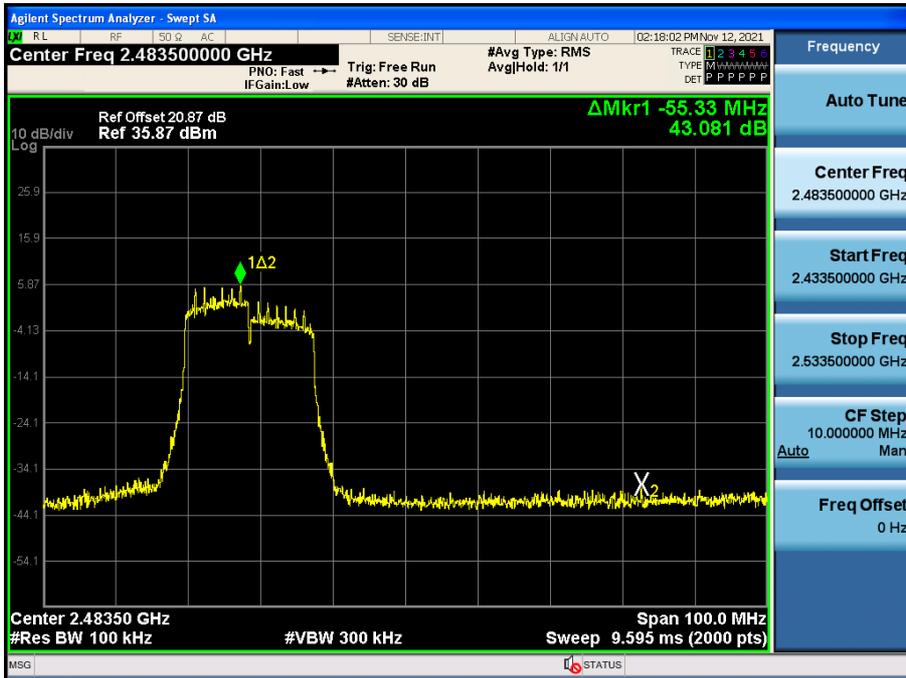

Band Edge (802.11n_HT20 MCS0 CH12)

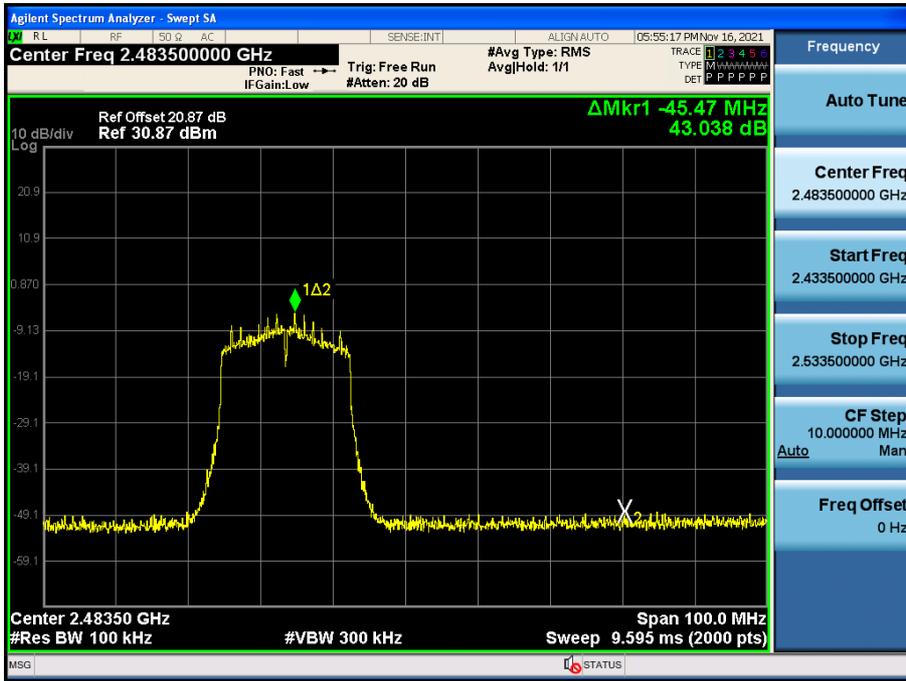

Band Edge (802.11n_HT20 MCS0 CH13)

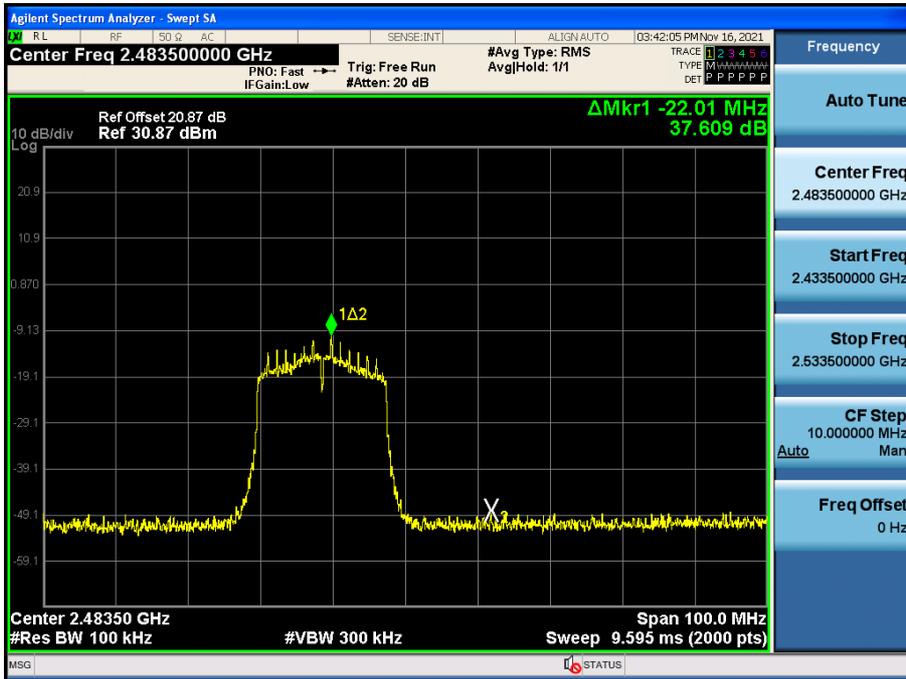


[Ant.1]

☑ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_Ch.11_11 Mbps)

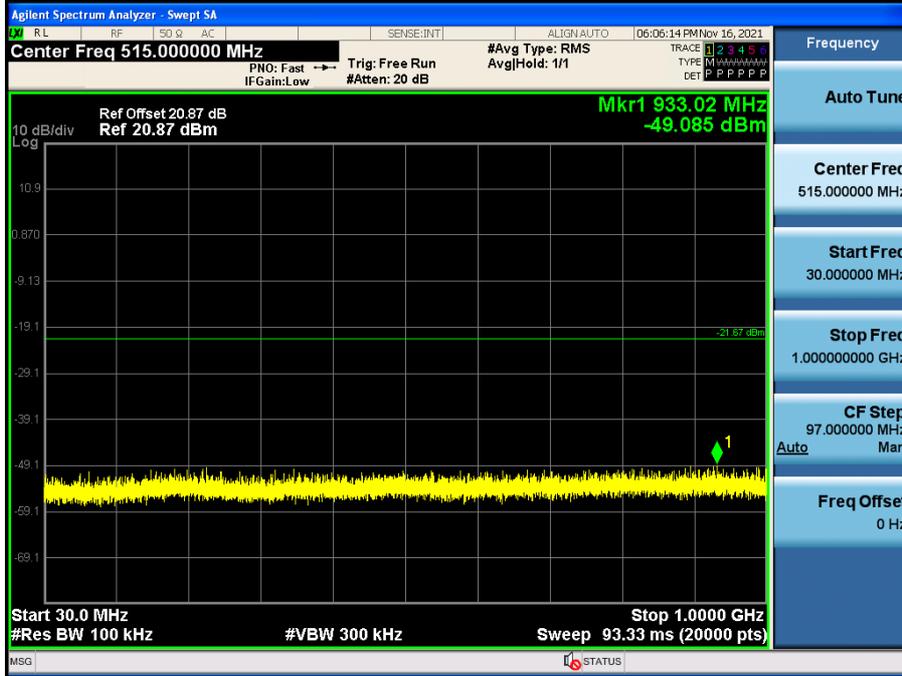


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_Ch.11_11 Mbps)

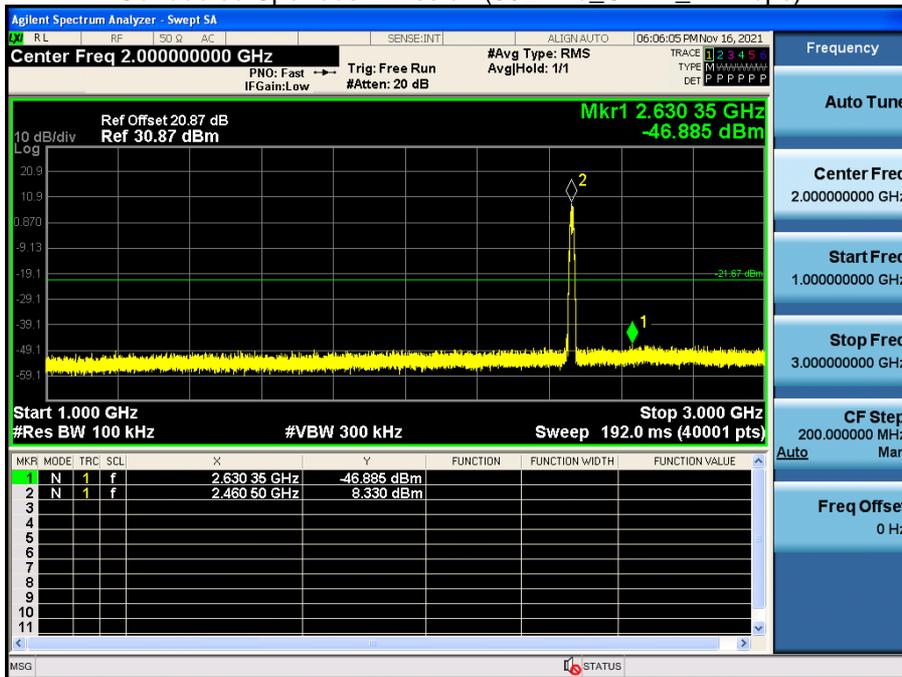


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b_Ch.11_11 Mbps)

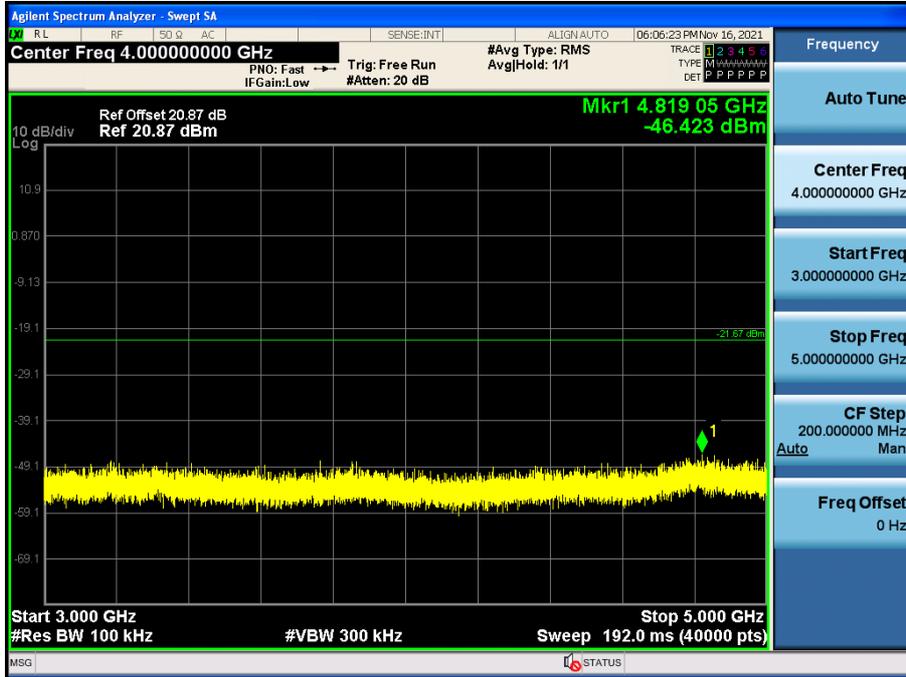


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b_Ch.11_11 Mbps)

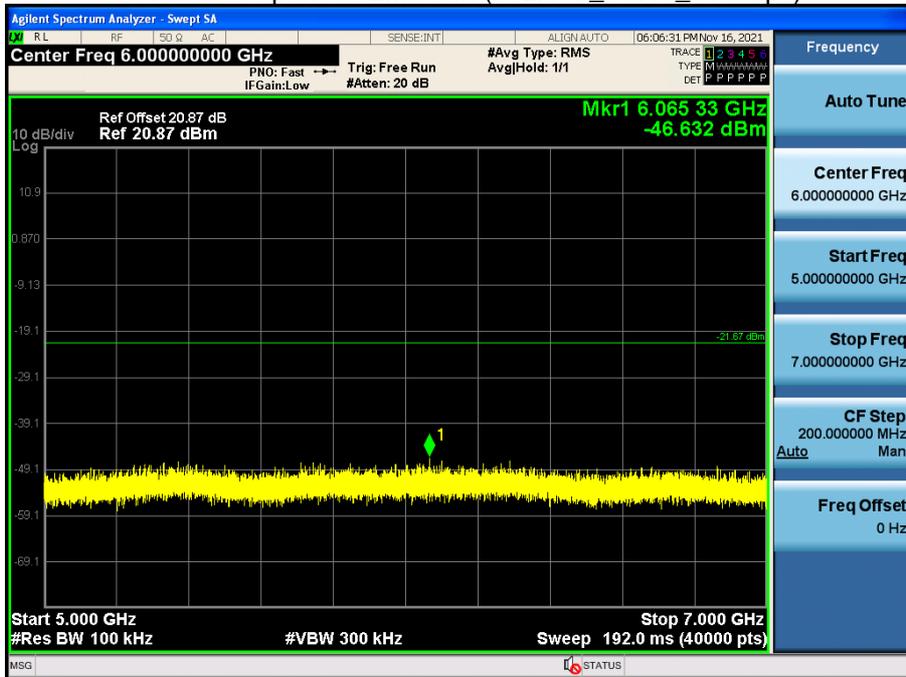


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_Ch.11_11 Mbps)

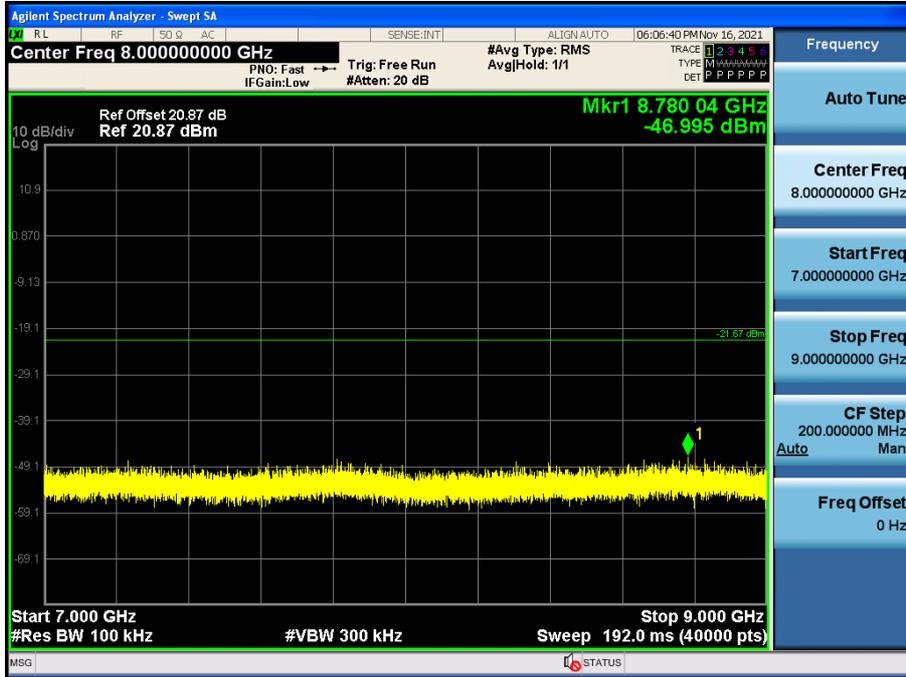


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_Ch.11_11 Mbps)

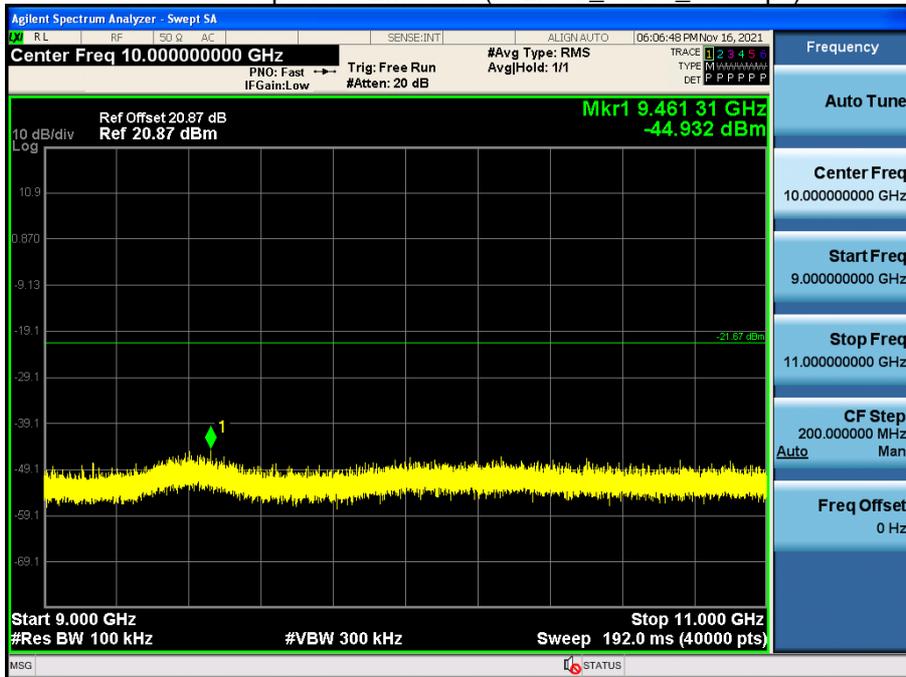


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_Ch.11_11 Mbps)

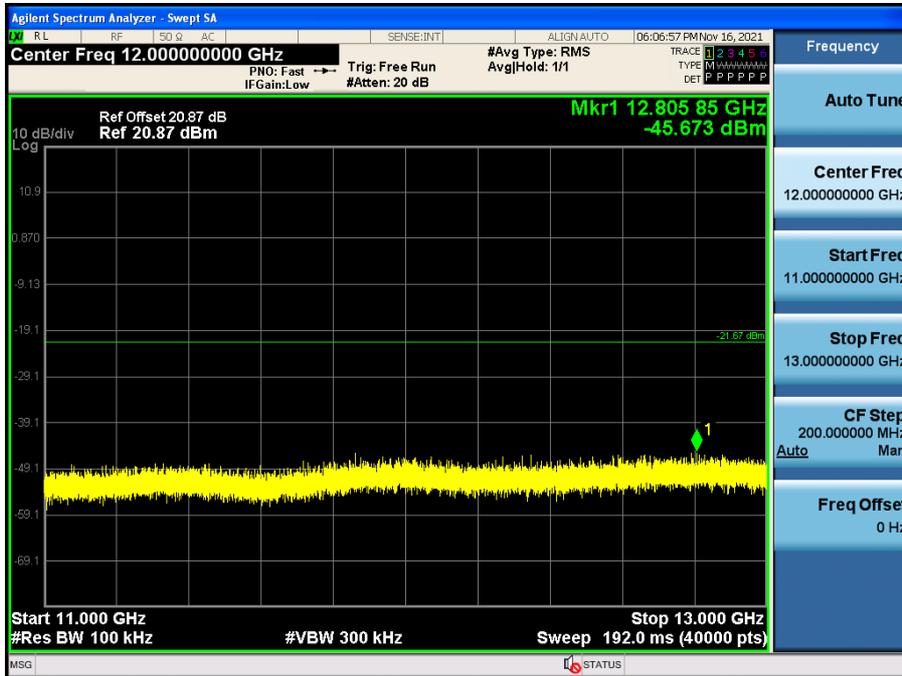


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_Ch.11_11 Mbps)

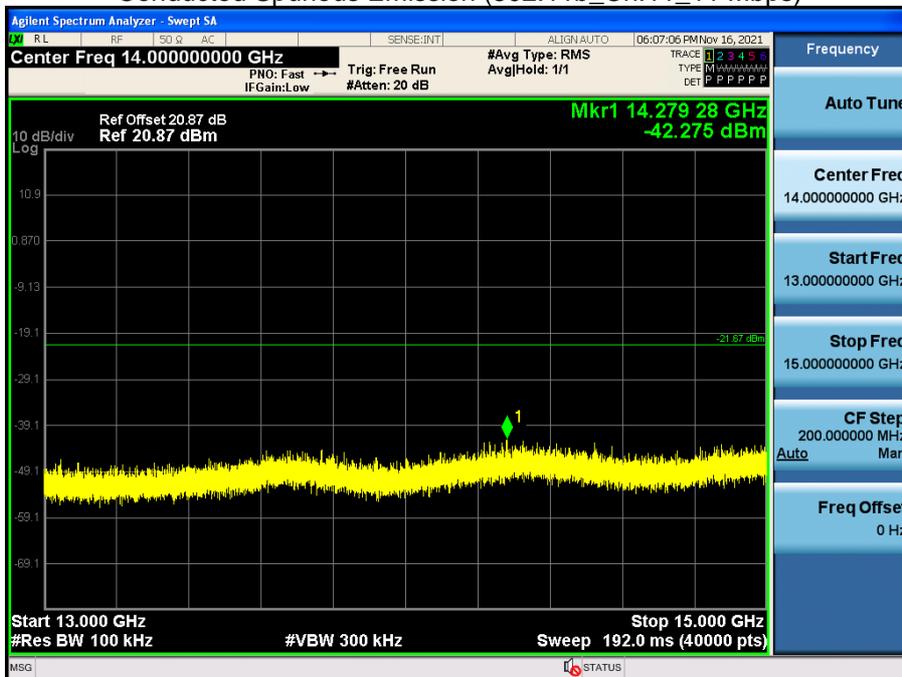

15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b_Ch.11_11 Mbps)

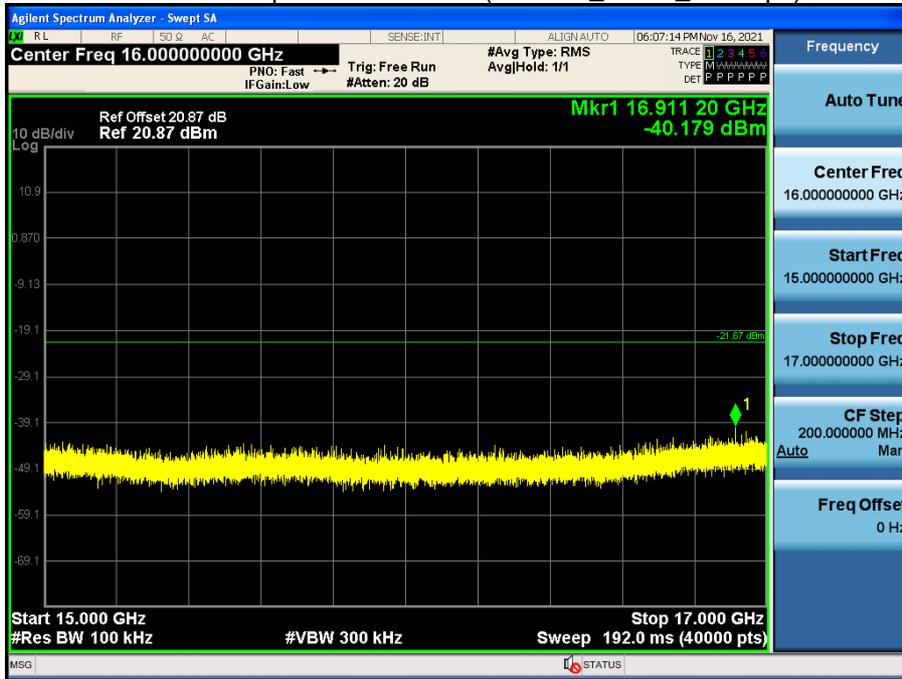


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b_Ch.11_11 Mbps)




19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b_Ch.11_11 Mbps)

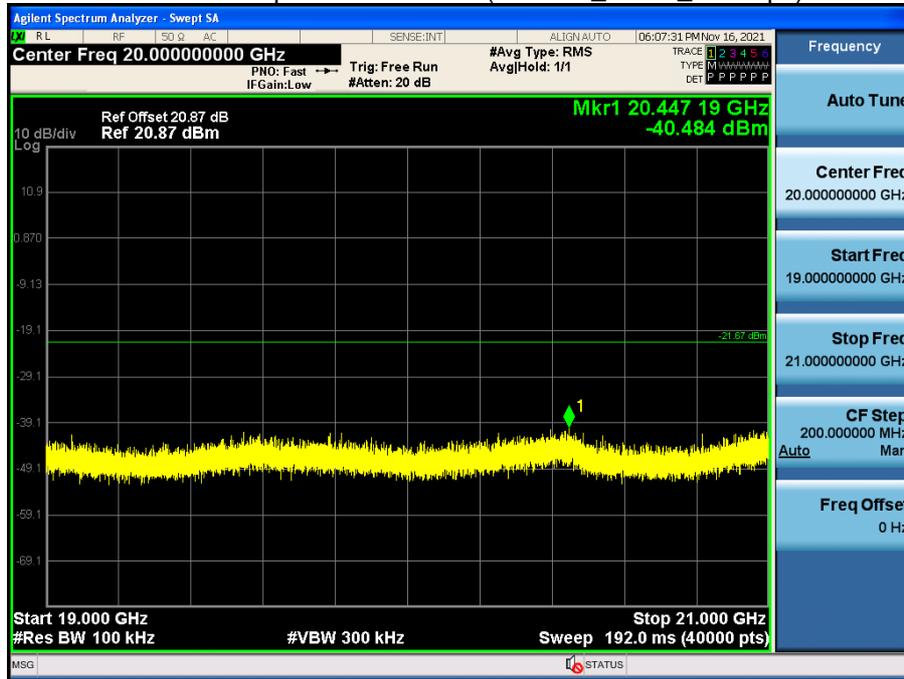

21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_Ch.11_11 Mbps)

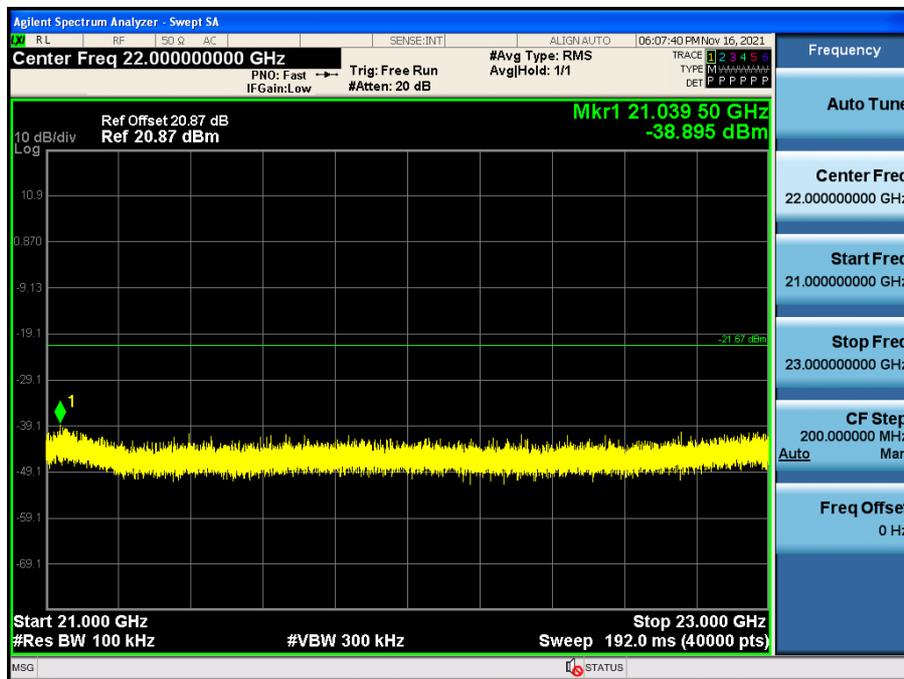


[Ant.2]

☑ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

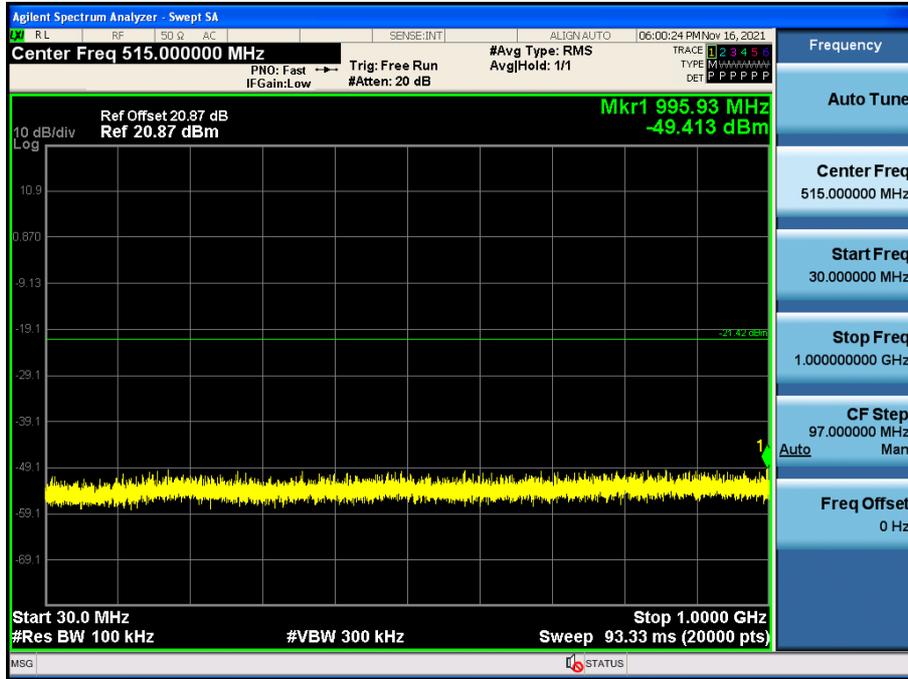


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

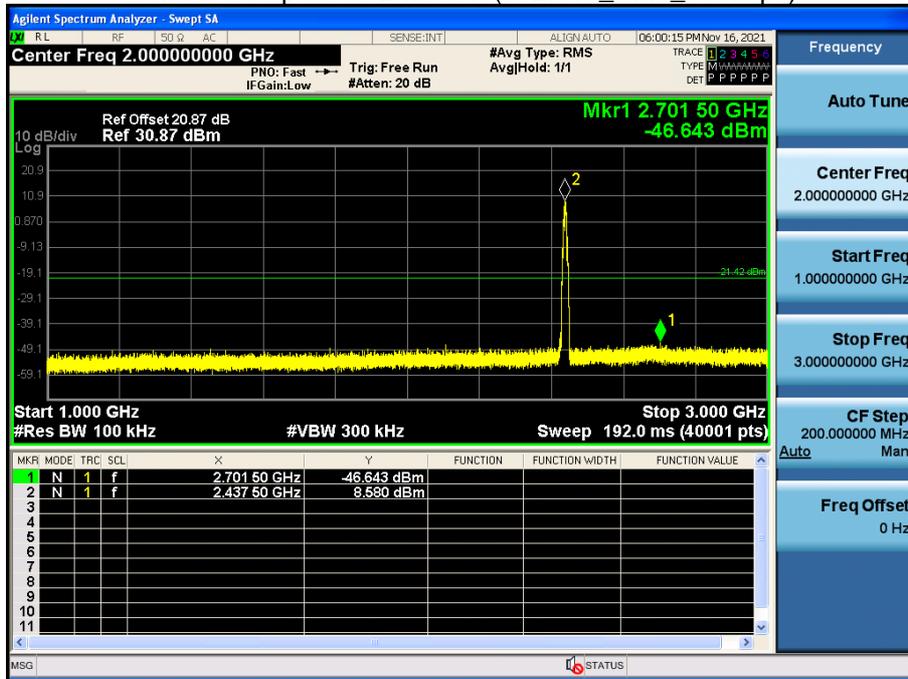


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

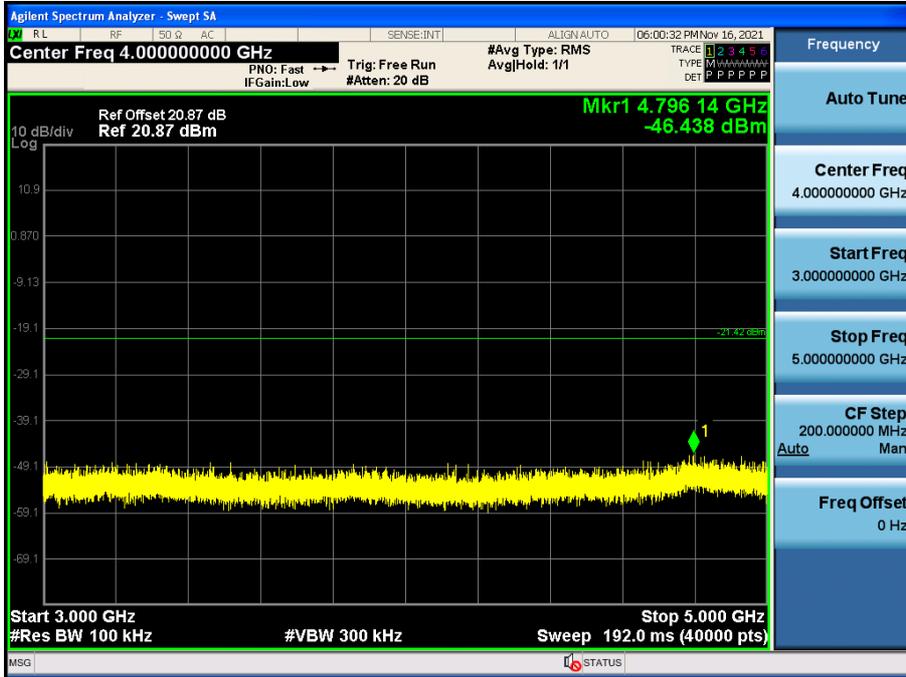


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

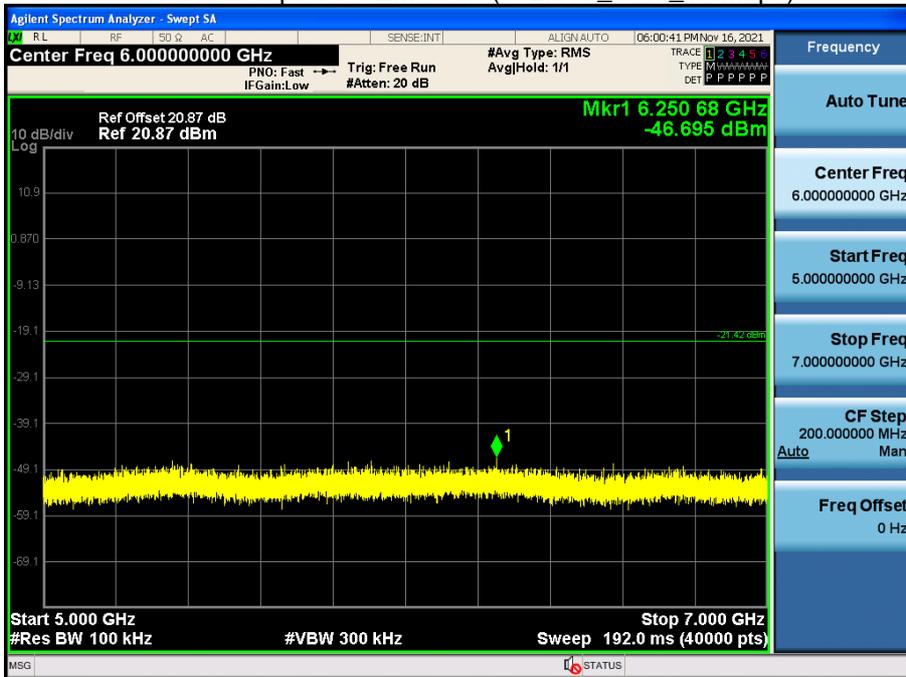


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

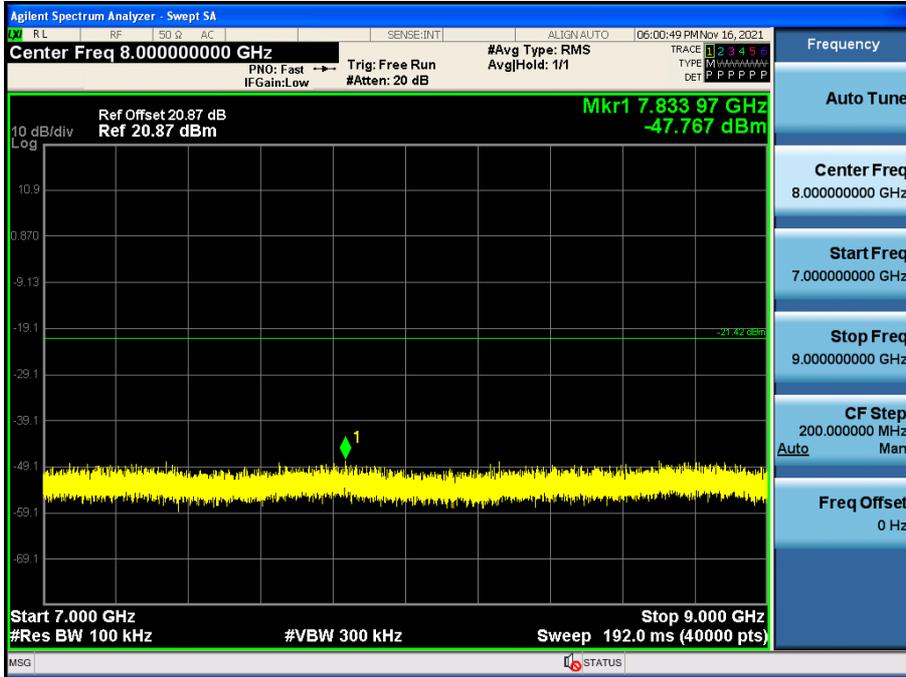


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

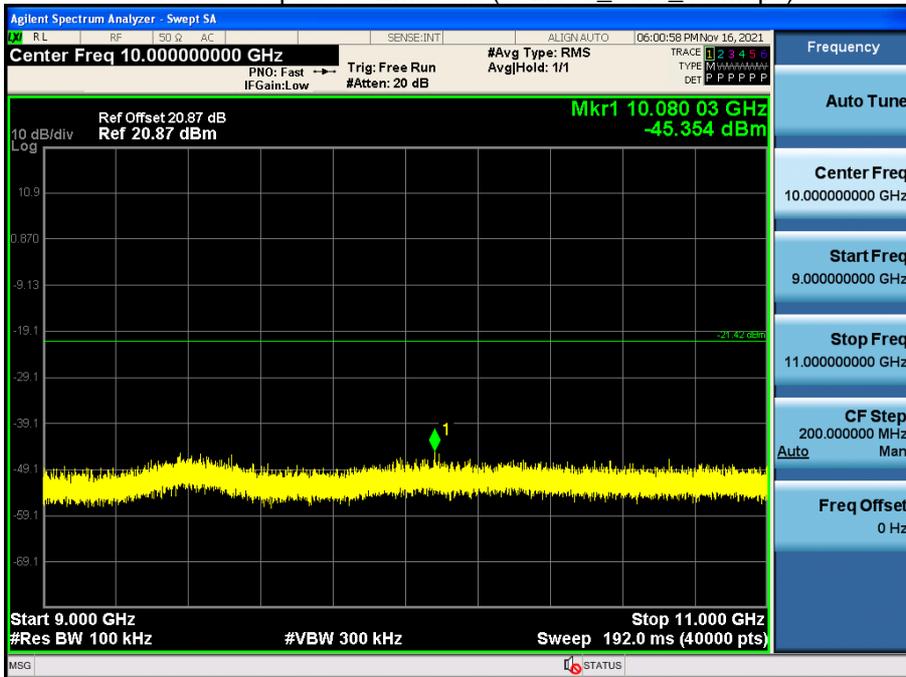


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

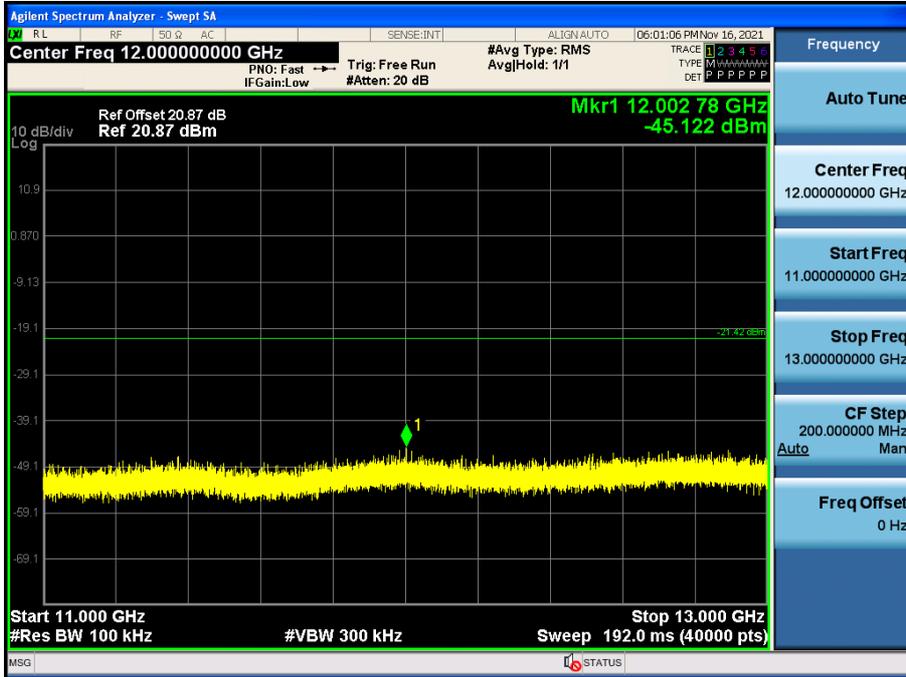


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

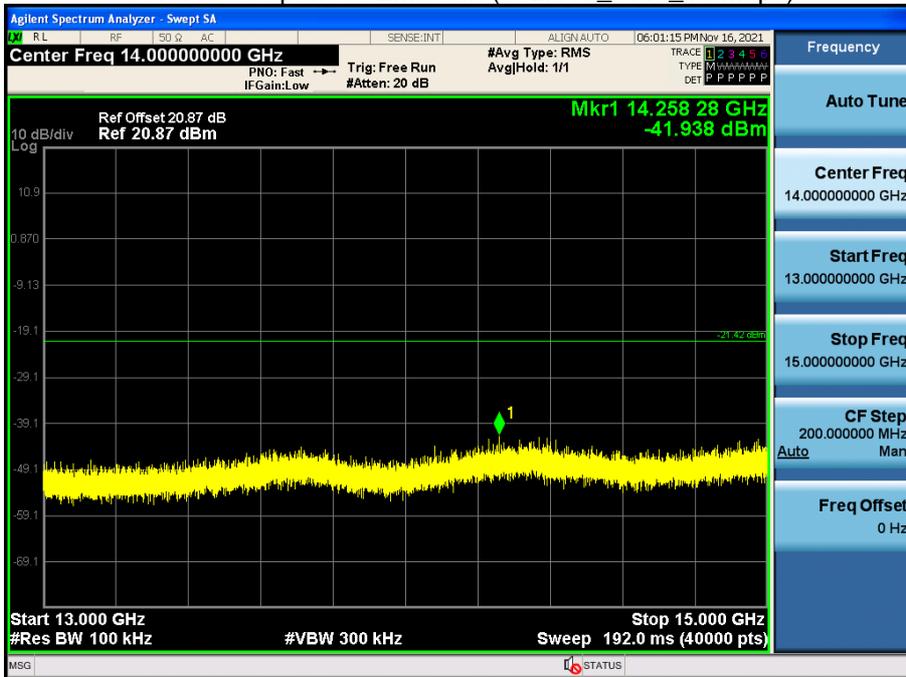


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

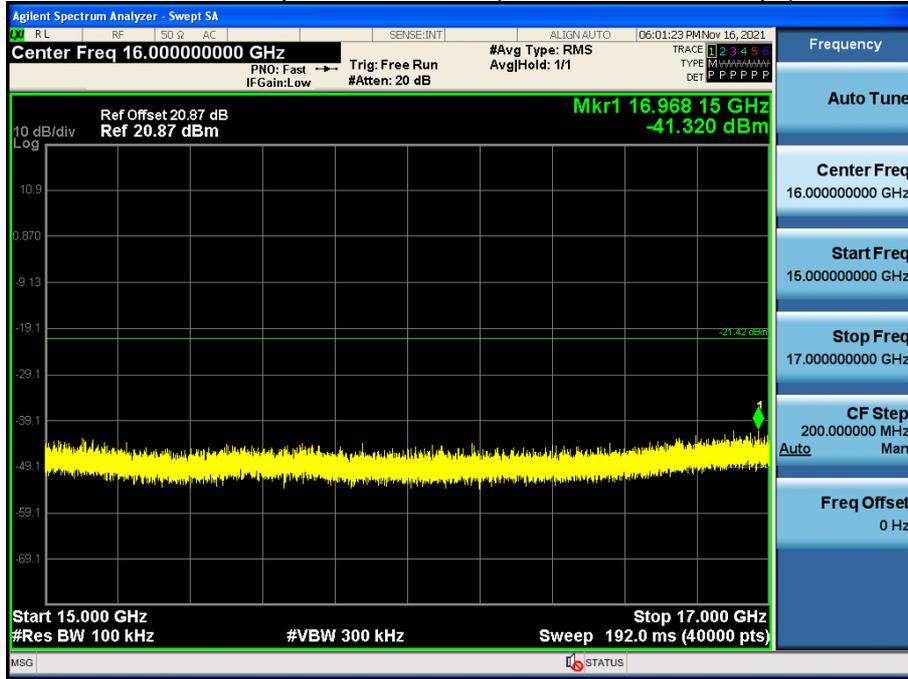


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

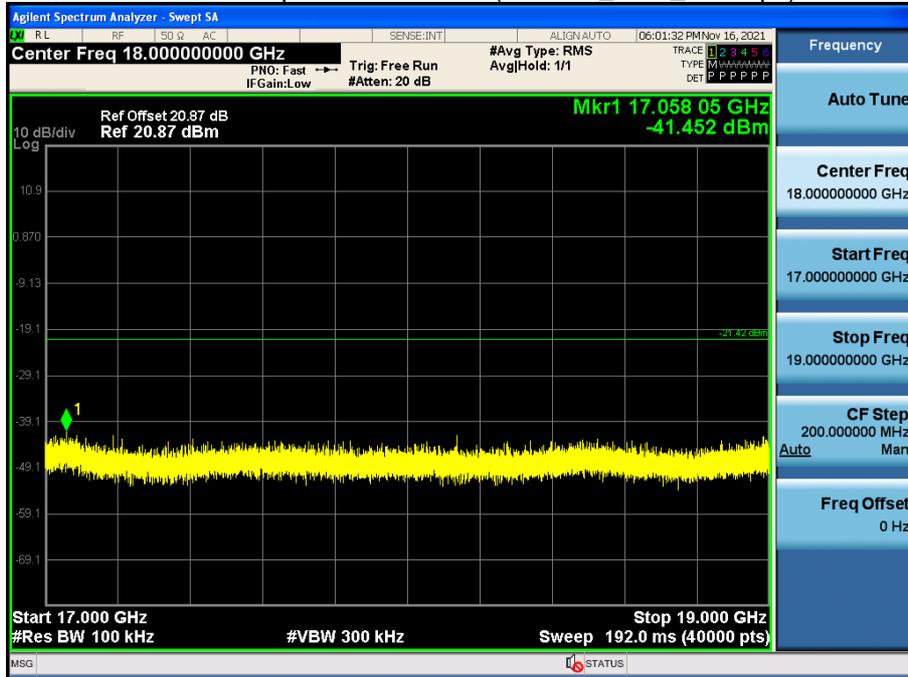


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

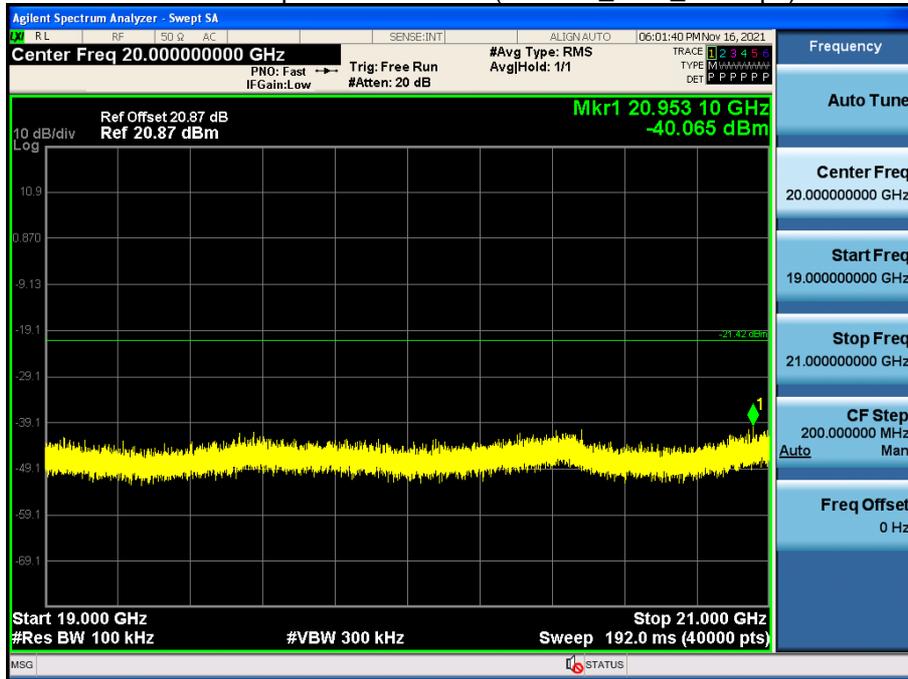


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

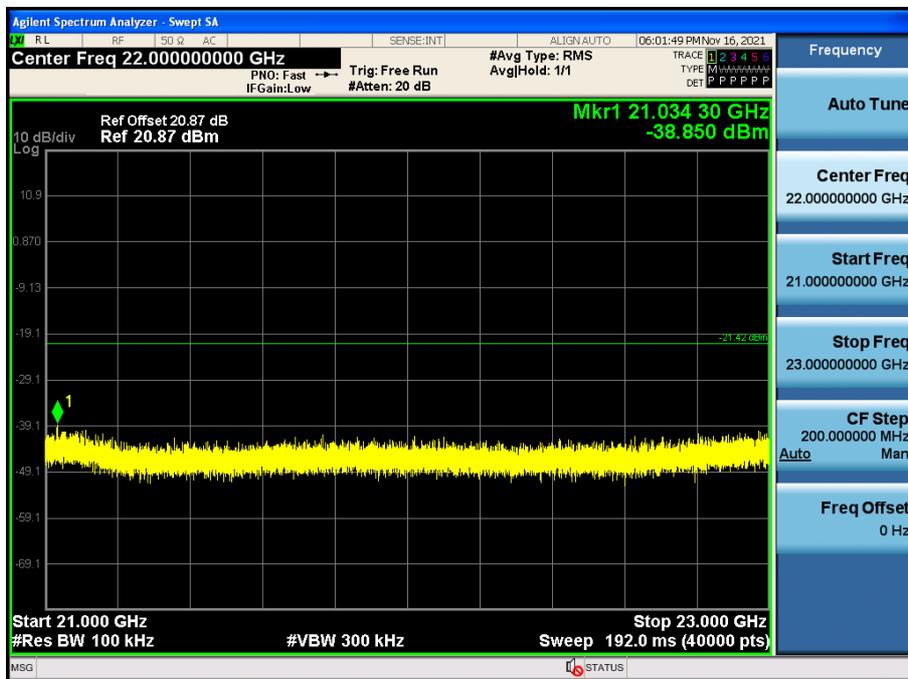

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b_Ch.6_11 Mbps)

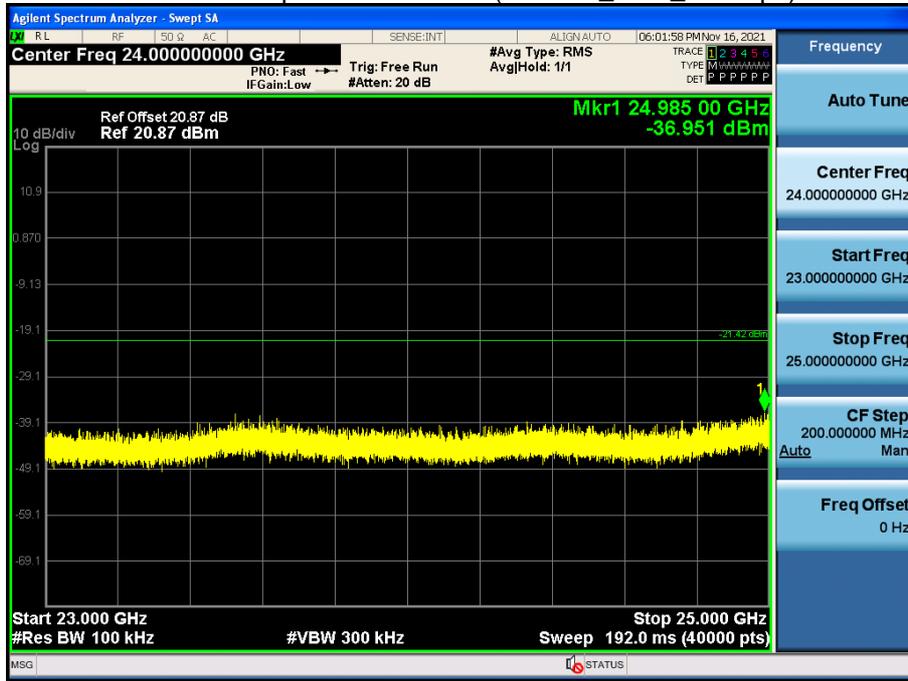

9.6 RADIATED SPURIOUS EMISSIONS**Frequency Range : 9 kHz – 30 MHz**

Frequency	Measured Value	A.F+C.L+D.F	POL	Total	Limit	Margin
[MHz]	[dB μ V/m]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. The Measured of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	POL	Total	Limit	Margin
[MHz]	[dB μ V/m]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
2. Radiated test is performed with hopping off.

Frequency Range : Above 1 GHz**[Ant.1&Ant.2_MIMO(CDD)]**

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz
Channel No.	01 Ch

Frequency [MHz]	Measured Level [dB μ V]	A.F.+C.L.-A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4824	42.18	5.27	V	47.45	73.98	26.53	PK
4824	32.54	5.27	V	37.81	53.98	16.17	AV
7236	37.96	12.86	V	50.82	73.98	23.16	PK
7236	26.06	12.86	V	38.92	53.98	15.06	AV
4824	42.76	5.27	H	48.03	73.98	25.95	PK
4824	33.19	5.27	H	38.46	53.98	15.52	AV
7236	38.24	12.86	H	51.10	73.98	22.88	PK
7236	26.11	12.86	H	38.97	53.98	15.01	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2437 MHz
Channel No.	06 Ch

Frequency [MHz]	Measured Level [dB μ V]	A.F.+C.L.-A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4874	40.69	5.43	V	46.12	73.98	27.86	PK
4874	30.06	5.43	V	35.49	53.98	18.49	AV
7311	38.71	12.90	V	51.61	73.98	22.37	PK
7311	26.35	12.90	V	39.25	53.98	14.73	AV
4874	41.80	5.43	H	47.23	73.98	26.75	PK
4874	31.54	5.43	H	36.97	53.98	17.01	AV
7311	38.56	12.90	H	51.46	73.98	22.52	PK
7311	26.31	12.90	H	39.21	53.98	14.77	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2462 MHz
Channel No.	11 Ch

Frequency [MHz]	Measured Level [dBμV]	A.F.+C.L.-A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4924	41.98	5.94	V	47.92	73.98	26.06	PK
4924	29.65	5.94	V	35.59	53.98	18.39	AV
7386	38.24	12.66	V	50.90	73.98	23.08	PK
7386	26.33	12.66	V	38.99	53.98	14.99	AV
4924	42.14	5.94	H	48.08	73.98	25.90	PK
4924	29.77	5.94	H	35.71	53.98	18.27	AV
7386	38.17	12.66	H	50.83	73.98	23.15	PK
7386	26.28	12.66	H	38.94	53.98	15.04	AV

Note:

Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412 MHz
 Channel No.: 01 Ch

Frequency [MHz]	Measured Level [dBμV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4824	41.56	0.00	5.27	V	46.83	73.98	27.15	PK
4824	28.87	0.36	5.27	V	34.50	53.98	19.48	AV
7236	37.71	0.00	12.86	V	50.57	73.98	23.41	PK
7236	25.55	0.36	12.86	V	38.77	53.98	15.21	AV
4824	41.72	0.00	5.27	H	46.99	73.98	26.99	PK
4824	28.99	0.36	5.27	H	34.62	53.98	19.36	AV
7236	37.86	0.00	12.86	H	50.72	73.98	23.26	PK
7236	25.57	0.36	12.86	H	38.79	53.98	15.19	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2437 MHz
 Channel No.: 06 Ch

Frequency [MHz]	Measured Level [dBμV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4874	41.62	0.00	5.43	V	47.05	73.98	26.93	PK
4874	29.02	0.36	5.43	V	34.81	53.98	19.17	AV
7311	38.68	0.00	12.90	V	51.58	73.98	22.40	PK
7311	26.11	0.36	12.90	V	39.37	53.98	14.61	AV
4874	41.93	0.00	5.43	H	47.36	73.98	26.62	PK
4874	29.08	0.36	5.43	H	34.87	53.98	19.11	AV
7311	38.30	0.00	12.90	H	51.20	73.98	22.78	PK
7311	26.05	0.36	12.90	H	39.31	53.98	14.67	AV

Operation Mode: 802.11g
Transfer Rate: 6 Mbps
Operating Frequency: 2462 MHz
Channel No. 11 Ch

Frequency [MHz]	Measured Level [dB μ V]	Duty Cycle Factor [dB]	A.F.+C.L. -A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4924	41.33	0.00	5.94	V	47.27	73.98	26.71	PK
4924	28.93	0.36	5.94	V	35.23	53.98	18.75	AV
7386	38.28	0.00	12.66	V	50.94	73.98	23.04	PK
7386	25.85	0.36	12.66	V	38.87	53.98	15.11	AV
4924	41.75	0.00	5.94	H	47.69	73.98	26.29	PK
4924	29.03	0.36	5.94	H	35.33	53.98	18.65	AV
7386	38.16	0.00	12.66	H	50.82	73.98	23.16	PK
7386	25.83	0.36	12.66	H	38.85	53.98	15.13	AV

Note:

Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.

Operation Mode: 802.11n (HT20)
Transfer MCS Index: 0
Operating Frequency: 2412 MHz
Channel No.: 01 Ch

Frequency [MHz]	Measured Level [dBμV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4824	41.16	0.00	5.27	V	46.43	73.98	27.55	PK
4824	28.96	0.36	5.27	V	34.59	53.98	19.39	AV
7236	37.73	0.00	12.86	V	50.59	73.98	23.39	PK
7236	25.55	0.36	12.86	V	38.77	53.98	15.21	AV
4824	41.28	0.00	5.27	H	46.55	73.98	27.43	PK
4824	29.03	0.36	5.27	H	34.66	53.98	19.32	AV
7236	37.94	0.00	12.86	H	50.80	73.98	23.18	PK
7236	25.61	0.36	12.86	H	38.83	53.98	15.15	AV

Operation Mode: 802.11n (HT20)
Transfer MCS Index: 0
Operating Frequency: 2437 MHz
Channel No.: 06 Ch

Frequency [MHz]	Measured Level [dBμV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4874	41.18	0.00	5.43	V	46.61	73.98	27.37	PK
4874	28.95	0.36	5.43	V	34.74	53.98	19.24	AV
7311	38.26	0.00	12.90	V	51.16	73.98	22.82	PK
7311	26.09	0.36	12.90	V	39.35	53.98	14.63	AV
4874	41.26	0.00	5.43	H	46.69	73.98	27.29	PK
4874	28.97	0.36	5.43	H	34.76	53.98	19.22	AV
7311	38.13	0.00	12.90	H	51.03	73.98	22.95	PK
7311	26.02	0.36	12.90	H	39.28	53.98	14.70	AV

Operation Mode: 802.11n (HT20)
Transfer MCS Index: 0
Operating Frequency: 2462 MHz
Channel No. 11 Ch

Frequency [MHz]	Measure d Level [dB μ V]	Duty Cycle Factor [dB]	A.F.+C.L.- A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measure ment Type
4924	41.20	0.00	5.94	V	47.14	73.98	26.84	PK
4924	28.92	0.36	5.94	V	35.22	53.98	18.76	AV
7386	38.42	0.00	12.66	V	51.08	73.98	22.90	PK
7386	25.82	0.36	12.66	V	38.84	53.98	15.14	AV
4924	41.39	0.00	5.94	H	47.33	73.98	26.65	PK
4924	28.97	0.36	5.94	H	35.27	53.98	18.71	AV
7386	38.28	0.00	12.66	H	50.94	73.98	23.04	PK
7386	25.73	0.36	12.66	H	38.75	53.98	15.23	AV

Note:

Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.


[RSDB Mode]
Test case 5
2.4G 802.11b ch.6 1Mbps & 5G 802.11n ch.36 MCS0

Frequency [MHz]	Measured Level [dBμV]	A.F.+C.L.-A.G + D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4874	41.35	5.43	V	46.78	73.98	27.20	PK
4874	29.62	5.43	V	35.05	53.98	18.93	AV
7311	38.91	12.90	V	51.81	73.98	22.17	PK
7311	26.23	12.90	V	39.13	53.98	14.85	AV
4874	42.38	5.43	H	47.81	73.98	26.17	PK
4874	29.73	5.43	H	35.16	53.98	18.82	AV
7311	38.94	12.90	H	51.84	73.98	22.14	PK
7311	26.25	12.90	H	39.15	53.98	14.83	AV


[Ant.1&Ant.2_MIMO(CDD)]

☑ Test Plots (Worst case : Z-V)

Radiated Spurious Emissions plot – Average Result (802.11g_6 Mbps, Ch.6 3rd Harmonic)

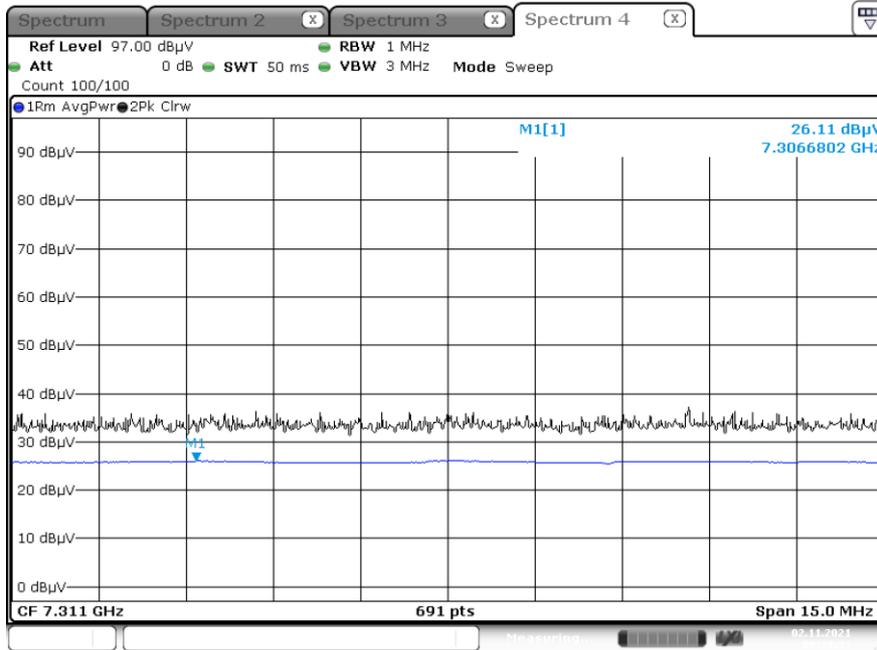

Radiated Spurious Emissions plot – Peak Result (802.11g_6 Mbps, Ch.6 3rd Harmonic)

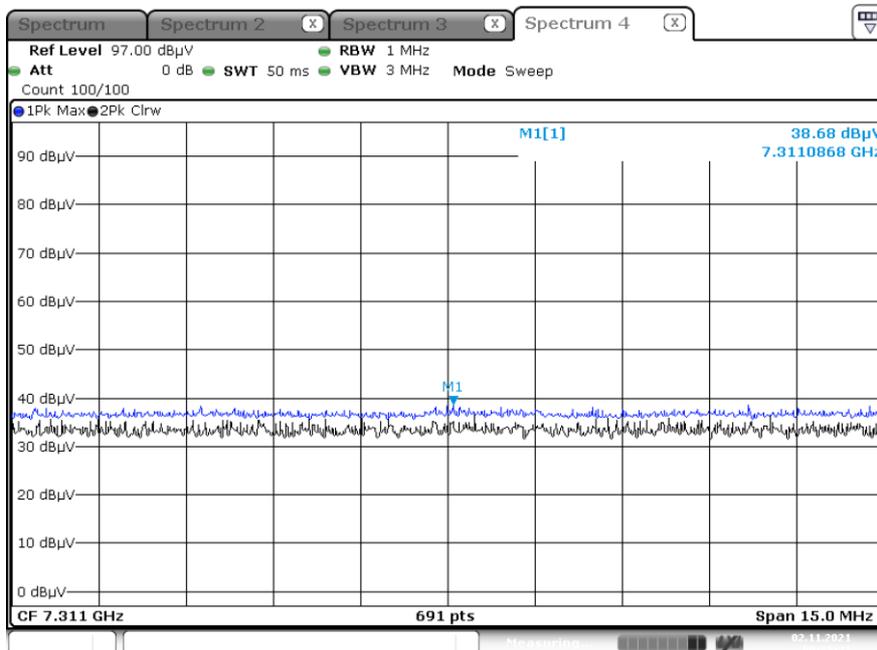


Note: Plot of worst case are only reported.


[RSDB]

2.4G 802.11b ch.6 1Mbps & 5G 802.11n ch.36 MCS0

Radiated Spurious Emissions plot – Average Result (Y-H_3rd Harmonic)

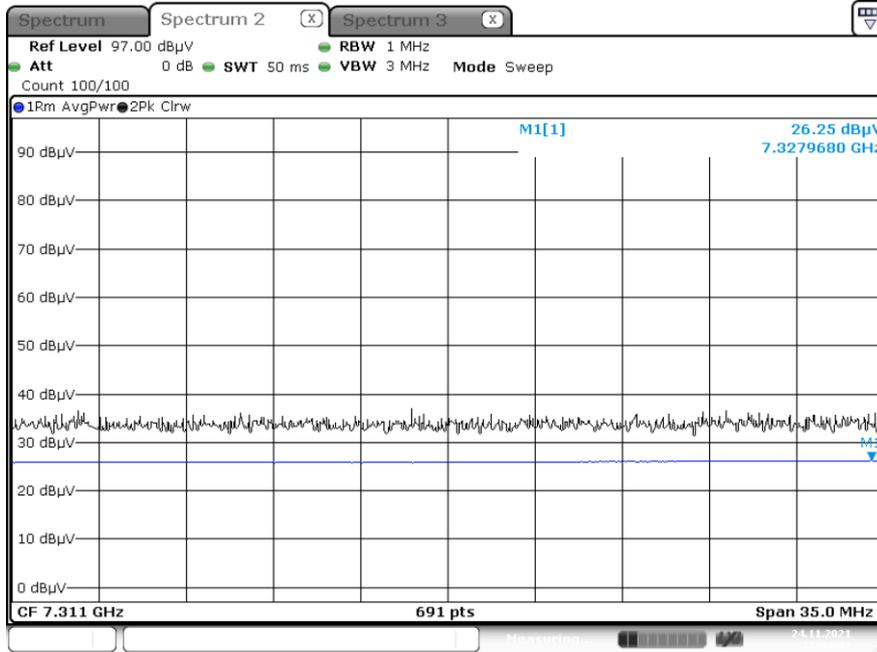

Radiated Spurious Emissions plot – Peak Result (Y-H_3rd Harmonic)

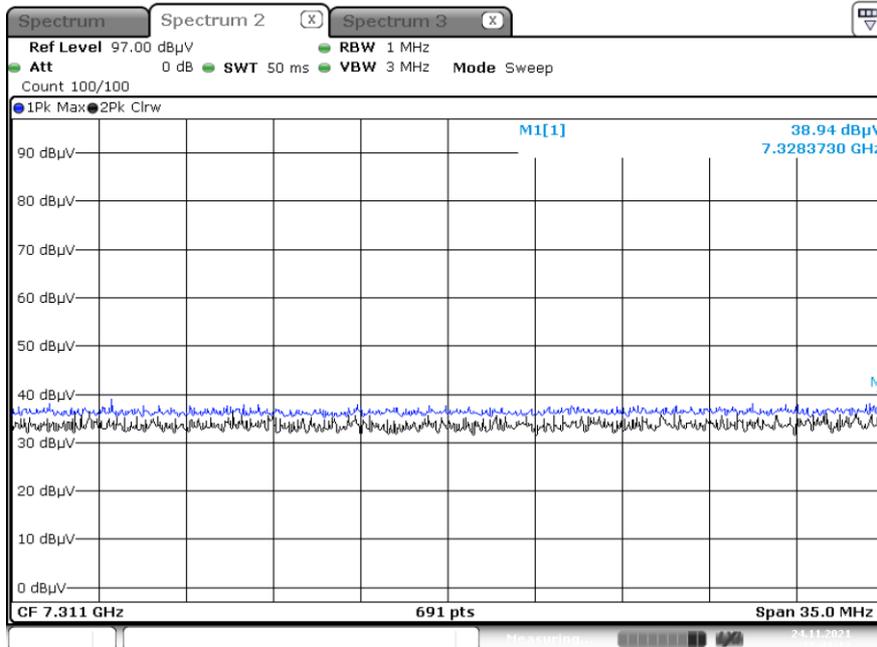

Note: Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES**[Ant.1&Ant.2_MIMO(CDD)]**

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Measured Level [dB μ V]	A.F.+ C.L+ D.F [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2390.0	21.26	35.23	H	56.49	73.98	17.49	PK
2390.0	9.22	35.23	H	44.45	53.98	9.53	AV
2390.0	21.18	35.23	V	56.41	73.98	17.57	PK
2390.0	9.15	35.23	V	44.38	53.98	9.60	AV
2483.5	21.54	35.96	H	57.50	73.98	16.48	PK
2483.5	9.25	35.96	H	45.21	53.98	8.77	AV
2483.5	21.07	35.96	V	57.03	73.98	16.95	PK
2483.5	9.11	35.96	V	45.07	53.98	8.91	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2467 MHz
Channel No.	12 Ch

Frequency [MHz]	Measured Level [dB μ V]	A.F.+ C.L+ D.F [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2483.5	20.78	35.96	H	56.74	73.98	17.24	PK
2483.5	8.85	35.96	H	44.81	53.98	9.17	AV
2483.5	20.68	35.96	V	56.64	73.98	17.34	PK
2483.5	8.81	35.96	V	44.77	53.98	9.21	AV

Operation Mode: 802.11b
Transfer Rate: 1 Mbps
Operating Frequency: 2472 MHz
Channel No.: 13 Ch

Frequency [MHz]	Measured Level [dB μ V]	A.F.+ C.L+ D.F [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2483.5	20.83	35.96	H	56.79	73.98	17.19	PK
2483.5	8.91	35.96	H	44.87	53.98	9.11	AV
2483.5	20.77	35.96	V	56.73	73.98	17.25	PK
2483.5	8.86	35.96	V	44.82	53.98	9.16	AV

Operation Mode: 802.11g
Transfer Rate: 6 Mbps
Operating Frequency: 2412 MHz, 2462 MHz
Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Measured Level [dB μ V]	Duty Cycle Factor [dB]	A.F.+ C.L+ D.F [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2390.0	26.43	0.00	35.23	H	61.66	73.98	12.32	PK
2390.0	11.85	0.36	35.23	H	47.44	53.98	6.54	AV
2390.0	26.11	0.00	35.23	V	61.34	73.98	12.64	PK
2390.0	11.74	0.36	35.23	V	47.33	53.98	6.65	AV
2483.5	25.68	0.00	35.96	H	61.64	73.98	12.34	PK
2483.5	11.43	0.36	35.96	H	47.75	53.98	6.23	AV
2483.5	25.24	0.00	35.96	V	61.20	73.98	12.78	PK
2483.5	11.07	0.36	35.96	V	47.39	53.98	6.59	AV

Operation Mode: 802.11g
Transfer Rate: 6 Mbps
Operating Frequency: 2417 MHz
Channel No. 02 Ch

Frequency [MHz]	Measured Level [dB μ V]	Duty Cycle Factor [dB]	A.F.+ C.L+ D.F [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2390.0	23.27	0.00	35.23	H	58.50	73.98	15.48	PK
2390.0	10.33	0.36	35.23	H	45.92	53.98	8.06	AV
2390.0	23.06	0.00	35.23	V	58.29	73.98	15.69	PK
2390.0	10.19	0.36	35.23	V	45.78	53.98	8.20	AV

Operation Mode: 802.11g
Transfer Rate: 6 Mbps
Operating Frequency: 2457 MHz
Channel No.: 10 Ch

Frequency [MHz]	Measured Level [dB μ V]	Duty Cycle Factor [dB]	A.F.+ C.L+ D.F [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2483.5	23.30	0.00	35.96	H	59.26	73.98	14.72	PK
2483.5	10.11	0.36	35.96	H	46.43	53.98	7.55	AV
2483.5	22.98	0.00	35.96	V	58.94	73.98	15.04	PK
2483.5	9.84	0.36	35.96	V	46.16	53.98	7.82	AV

Operation Mode: 802.11g
Transfer Rate: 6 Mbps
Operating Frequency: 2467 MHz
Channel No.: 12 Ch

Frequency [MHz]	Measured Level [dB μ V]	Duty Cycle Factor [dB]	A.F.+ C.L+ D.F [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2483.5	21.93	0.00	35.96	H	57.89	73.98	16.09	PK
2483.5	9.54	0.36	35.96	H	45.86	53.98	8.12	AV
2483.5	21.84	0.00	35.96	V	57.80	73.98	16.18	PK
2483.5	9.27	0.36	35.96	V	45.59	53.98	8.39	AV

Operation Mode: 802.11g
Transfer Rate: 6 Mbps
Operating Frequency: 2472 MHz
Channel No.: 13 Ch

Frequency [MHz]	Measured Level [dB μ V]	Duty Cycle Factor [dB]	A.F.+ C.L+ D.F [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2483.5	26.63	0.00	35.96	H	62.59	73.98	11.39	PK
2483.5	11.65	0.36	35.96	H	47.97	53.98	6.01	AV
2483.5	26.46	0.00	35.96	V	62.42	73.98	11.56	PK
2483.5	11.32	0.36	35.96	V	47.64	53.98	6.34	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: 0
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Measured Level [dB μ V]	Duty Cycle Factor [dB]	A.F.+ C.L+ D.F [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2390.0	29.96	0.00	35.23	H	65.19	73.98	8.79	PK
2390.0	14.15	0.36	35.23	H	49.74	53.98	4.24	AV
2390.0	29.47	0.00	35.23	V	64.70	73.98	9.28	PK
2390.0	13.97	0.36	35.23	V	49.56	53.98	4.42	AV
2483.5	23.28	0.00	35.96	H	59.24	73.98	14.74	PK
2483.5	10.81	0.36	35.96	H	47.13	53.98	6.85	AV
2483.5	22.84	0.00	35.96	V	58.80	73.98	15.18	PK
2483.5	10.53	0.36	35.96	V	46.85	53.98	7.13	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: 0
 Operating Frequency: 2417 MHz
 Channel No.: 02 Ch

Frequency [MHz]	Measured Level [dB μ V]	Duty Cycle Factor [dB]	A.F.+ C.L+ D.F [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2390.0	31.02	0.00	35.23	H	66.25	73.98	7.73	PK
2390.0	14.12	0.36	35.23	H	49.71	53.98	4.27	AV
2390.0	30.88	0.00	35.23	V	66.11	73.98	7.87	PK
2390.0	14.01	0.36	35.23	V	49.60	53.98	4.38	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: 0
 Operating Frequency: 2457 MHz
 Channel No.: 10 Ch

Frequency [MHz]	Measured Level [dBμV]	Duty Cycle Factor [dB]	A.F.+ C.L+ D.F [dB]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	21.85	0.00	35.96	H	57.81	73.98	16.17	PK
2483.5	9.59	0.36	35.96	H	45.91	53.98	8.07	AV
2483.5	21.78	0.00	35.96	V	57.74	73.98	16.24	PK
2483.5	9.50	0.36	35.96	V	45.82	53.98	8.16	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: 0
 Operating Frequency: 2467 MHz
 Channel No.: 12 Ch

Frequency [MHz]	Measured Level [dBμV]	Duty Cycle Factor [dB]	A.F.+ C.L+ D.F [dB]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	21.12	0.00	35.96	H	57.08	73.98	16.90	PK
2483.5	9.42	0.36	35.96	H	45.74	53.98	8.24	AV
2483.5	21.03	0.00	35.96	V	56.99	73.98	16.99	PK
2483.5	9.37	0.36	35.96	V	45.69	53.98	8.29	AV


Operation Mode: 802.11n (HT20)
 Transfer Rate: 0
 Operating Frequency: 2472 MHz
 Channel No.: 13 Ch

Frequency [MHz]	Measured Level [dBμV]	Duty Cycle Factor [dB]	A.F.+ C.L+ D.F [dB]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	25.83	0.00	35.96	H	61.79	73.98	12.19	PK
2483.5	10.34	0.36	35.96	H	46.66	53.98	7.32	AV
2483.5	25.71	0.00	35.96	V	61.67	73.98	12.31	PK
2483.5	10.22	0.36	35.96	V	46.54	53.98	7.44	AV


■ Test Plots

[Ant.1&Ant.2_MIMO(CDD)] (Worst case : Z-H)

Radiated Restricted Band Edges plot – Average Result (802.11n (HT20)_ MCS0 Ch.1)

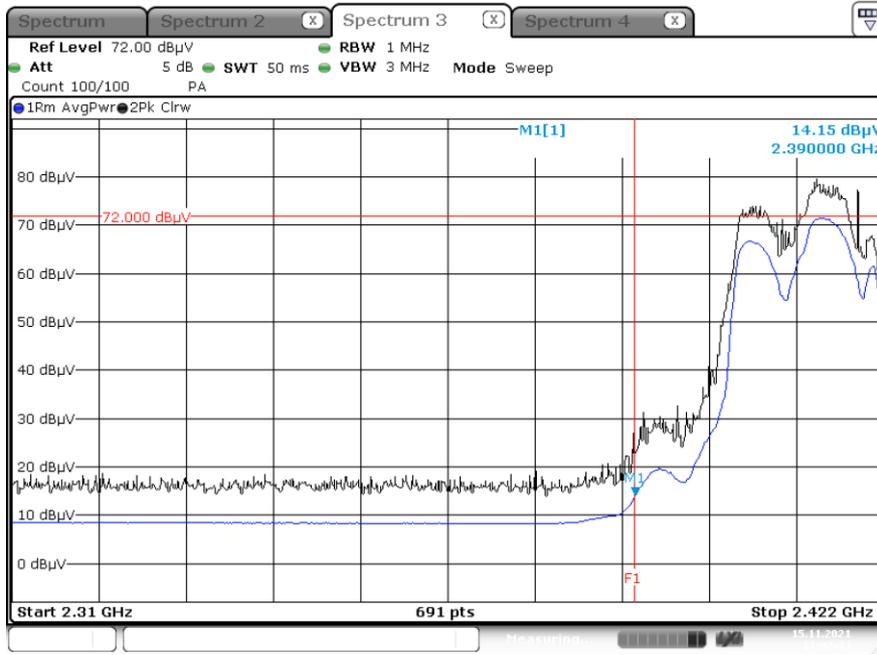

Radiated Restricted Band Edges plot – Peak Result (802.11n (HT20)_ MCS0 Ch.1)

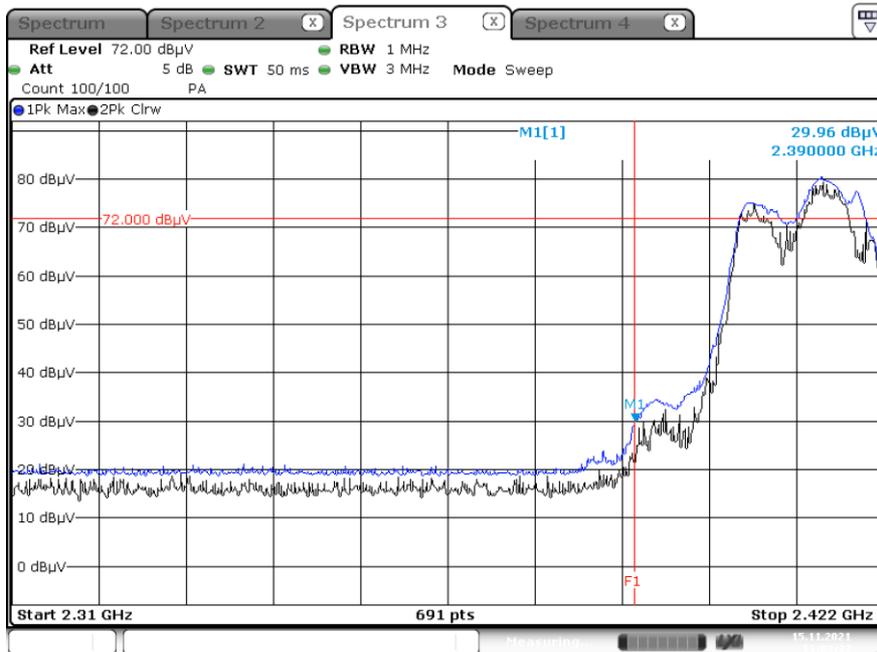

Note:

Plot of worst case are only reported.

9.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

WLAN 2.4G MODE_L1


1 / 2

Test Report

Common Information

EUT : SM-X706B
 Manufacturer : SAMSUNG
 Test Site : SHIELD ROOM
 Operating Conditions : WLAN 2.4G MODE_L1

Full Spectrum

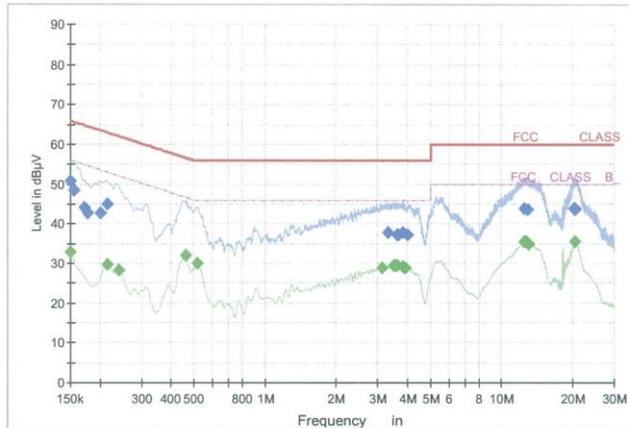

Preview Result Preview Result FCC CLASS
 FCC CLASS B_ Final_Result QPK Final_Result CAV

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1500	50.68	66.00	15.32	9.000	L1	OFF	9.6
0.1545	48.40	65.75	17.35	9.000	L1	OFF	9.6
0.1725	44.11	64.84	20.73	9.000	L1	OFF	9.6
0.1770	42.77	64.63	21.86	9.000	L1	OFF	9.6
0.2018	42.67	63.54	20.86	9.000	L1	OFF	9.6
0.2153	45.08	63.00	17.92	9.000	L1	OFF	9.6
3.3013	37.80	56.00	18.20	9.000	L1	OFF	9.8
3.6028	37.34	56.00	18.66	9.000	L1	OFF	9.8
3.6635	37.32	56.00	18.68	9.000	L1	OFF	9.8
3.8278	37.71	56.00	18.29	9.000	L1	OFF	9.8
3.8368	37.66	56.00	18.34	9.000	L1	OFF	9.8
4.0100	37.23	56.00	18.77	9.000	L1	OFF	9.8
12.5195	43.81	60.00	16.19	9.000	L1	OFF	10.1
12.5330	43.80	60.00	16.20	9.000	L1	OFF	10.1
12.8390	43.66	60.00	16.34	9.000	L1	OFF	10.2
20.3338	43.84	60.00	16.16	9.000	L1	OFF	10.4
20.3675	43.73	60.00	16.27	9.000	L1	OFF	10.4
20.5745	43.50	60.00	16.50	9.000	L1	OFF	10.4

2021-11-19

오전 8:45:17

WLAN 2.4G MODE_L1

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1500	32.82	56.00	23.18	9.000	L1	OFF	9.6
0.2153	29.70	53.00	23.30	9.000	L1	OFF	9.6
0.2400	28.34	52.10	23.76	9.000	L1	OFF	9.6
0.4605	32.04	46.68	14.64	9.000	L1	OFF	9.6
0.5158	29.98	46.00	16.02	9.000	L1	OFF	9.7
3.1190	28.88	46.00	17.12	9.000	L1	OFF	9.8
3.5128	29.35	46.00	16.65	9.000	L1	OFF	9.8
3.5263	29.36	46.00	16.64	9.000	L1	OFF	9.8
3.6343	29.32	46.00	16.68	9.000	L1	OFF	9.8
3.8390	29.16	46.00	16.84	9.000	L1	OFF	9.8
3.9313	28.83	46.00	17.17	9.000	L1	OFF	9.8
12.5308	35.46	50.00	14.54	9.000	L1	OFF	10.1
12.6680	35.49	50.00	14.51	9.000	L1	OFF	10.2
12.7963	35.47	50.00	14.53	9.000	L1	OFF	10.2
12.9740	35.10	50.00	14.90	9.000	L1	OFF	10.2
13.0978	34.80	50.00	15.20	9.000	L1	OFF	10.2
20.3653	35.37	50.00	14.63	9.000	L1	OFF	10.4
20.4035	35.58	50.00	14.42	9.000	L1	OFF	10.4

2021-11-19

오전 8:45:17

Conducted Emissions (Line 2)

WLAN 2.4G MODE_N


1 / 2

Test Report

Common Information

EUT : SM-X706B
 Manufacturer : SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions : WLAN 2.4G MODE_N

Full Spectrum

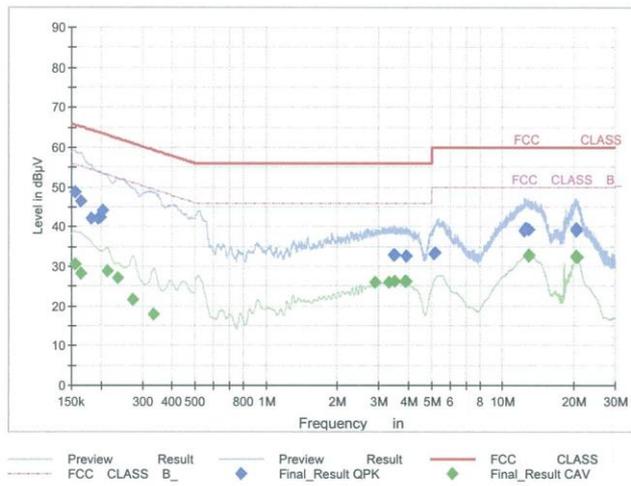

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	48.79	65.75	16.97	9.000	N	OFF	9.6
0.1635	46.49	65.28	18.80	9.000	N	OFF	9.6
0.1815	42.22	64.42	22.19	9.000	N	OFF	9.6
0.1950	42.09	63.82	21.73	9.000	N	OFF	9.6
0.1995	42.53	63.63	21.10	9.000	N	OFF	9.6
0.2040	44.13	63.45	19.31	9.000	N	OFF	9.6
3.4790	32.85	56.00	23.15	9.000	N	OFF	9.8
3.4880	32.76	56.00	23.24	9.000	N	OFF	9.8
3.9020	32.63	56.00	23.37	9.000	N	OFF	9.8
5.1463	33.07	60.00	26.93	9.000	N	OFF	9.9
5.1553	33.20	60.00	26.80	9.000	N	OFF	9.9
5.1800	33.47	60.00	26.53	9.000	N	OFF	9.9
12.3980	39.08	60.00	20.92	9.000	N	OFF	10.2
12.5195	39.49	60.00	20.51	9.000	N	OFF	10.2
12.5915	39.51	60.00	20.49	9.000	N	OFF	10.2
12.8525	39.35	60.00	20.65	9.000	N	OFF	10.2
20.3855	38.87	60.00	21.13	9.000	N	OFF	10.5
20.4823	39.42	60.00	20.58	9.000	N	OFF	10.5

2021-11-19

오전 8:38:57

WLAN 2.4G MODE_N

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	30.57	55.75	25.19	9.000	N	OFF	9.6
0.1635	28.25	55.28	27.03	9.000	N	OFF	9.6
0.2130	28.87	53.09	24.22	9.000	N	OFF	9.6
0.2355	27.09	52.25	25.16	9.000	N	OFF	9.6
0.2738	21.51	51.00	29.50	9.000	N	OFF	9.6
0.3345	18.02	49.34	31.31	9.000	N	OFF	9.6
2.8828	25.87	46.00	20.13	9.000	N	OFF	9.8
3.3170	26.00	46.00	20.00	9.000	N	OFF	9.8
3.4903	26.17	46.00	19.83	9.000	N	OFF	9.8
3.5128	26.27	46.00	19.73	9.000	N	OFF	9.8
3.8615	26.12	46.00	19.88	9.000	N	OFF	9.8
3.9155	26.13	46.00	19.87	9.000	N	OFF	9.8
12.8525	32.77	50.00	17.23	9.000	N	OFF	10.2
12.8863	32.64	50.00	17.36	9.000	N	OFF	10.2
20.4485	32.31	50.00	17.69	9.000	N	OFF	10.5
20.4688	32.45	50.00	17.55	9.000	N	OFF	10.5
20.4890	32.67	50.00	17.33	9.000	N	OFF	10.5
20.6375	32.32	50.00	17.68	9.000	N	OFF	10.5

2021-11-19

오전 8:38:57

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/23/2022	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/17/2022	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	03/15/2022	Annual
Signal Analyzer	N9030A	Agilent	MY49432108	03/09/2022	Annual
Power Meter	N1911A	Agilent	MY45100523	04/08/2022	Annual
Power Sensor	N1921A	Agilent	MY57820067	04/08/2022	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/09/2022	Annual
DC Power Supply	E3632A	HP	MY50360067	02/26/2022	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	07560	06/18/2022	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	08285	06/28/2022	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/08/2022	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	N/A	Audix	N/A	N/A	N/A
Amp & Filter Bank Switch Controller	FBSM-01B	TNM system	TM19050002	N/A	N/A
Loop Antenna	1513	Schwarzbeck	1513-333	03/19/2022	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	09/04/2022	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	02296	05/19/2022	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Spectrum Analyzer	FSV(10 Hz ~ 40 GHz)	Rohde & Schwarz	101055	05/14/2022	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/06/2022	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/24/2022	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/24/2022	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/04/2021	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/23/2022	Annual
HPF(3~18GHz) LNA1(1~18GHz)	FMSR-05B	TNM system	F6	01/20/2022	Annual
ATT(10dB) + LNA1(1~18GHz)	FMSR -05B	TNM system	None	01/20/2022	Annual
ATT(3dB) + LNA1(1~18GHz)	FMSR -05B	TNM system	None	01/20/2022	Annual
LNA1(1~18GHz)	FMSR -05B	TNM system	25540	01/20/2022	Annual
HPF(7~18GHz) LNA2(6~18GHz)	FMSR -05B	TNM system	28550	01/20/2022	Annual
Thru(30MHz ~ 18GHz)	FMSR -05B	TNM system	None	01/20/2022	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2112-FC012-P