



POWER DENSITY EVALUATION REPORT

FCC 47 CFR § 2.1093

For

GSM/WCDMA/LTE/5G NR Tablet + BT/BLE, DTS/UNII a/b/g/n/ac/ax and WPT

FCC ID: A3LSMX710

Report Number: R14720543-S2V2

Issue Date: 2023-06-05

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
129 Samsung-Ro, Yeongtong-Gu
Suwon-Si, Gyeonggi-Do, 16677, Korea**

Prepared by

**UL LLC
12 LABORATORY DR
RTP, NC 27709, U.S.A.
TEL: (919) 549-1400**



REVISION HISTORY

Rev.	Date	Revisions	Revised By
V1	2023-05-25	Initial Issue	--
V2	2023-06-05	Updated Combinations numbers in §10.1	Richard Jankovics

Table of Contents

1.	Attestation of Test Results	4
2.	Test Specification, Methods and Procedures.....	5
3.	Facilities and Accreditation	5
4.	Measurement System & Test Equipment.....	6
4.1.	<i>EUmmWVx / E-Field 5G Probe.....</i>	<i>6</i>
4.2.	<i>Data Acquisition Electronics(DAE).....</i>	<i>6</i>
4.3.	<i>Measurement System.....</i>	<i>7</i>
4.4.	<i>Measurement Procedures.....</i>	<i>8</i>
4.4.1	System Verification Scan Procedures.....	8
4.4.2	Scan Procedures	8
4.5	<i>Test Equipment.....</i>	<i>9</i>
5	Measurement Uncertainty.....	10
6	Device Under Test (DUT) Information	11
6.1	<i>DUT Description</i>	<i>11</i>
6.2	<i>Wireless Technologies.....</i>	<i>11</i>
7	RF Exposure Conditions (Test Configurations).....	12
8	System Performance Check	12
9	Measured and Reported (Scaled) Results	13
9.1	<i>Wi-Fi 6 GHz (U-NII Bands).....</i>	<i>13</i>
10	Simultaneous Transmission Conditions	14
10.1	<i>Simultaneous Transmission Combinations</i>	<i>14</i>
10.2	<i>Simultaneous Transmission Results</i>	<i>14</i>
Appendixes	15
	<i>Appendix A: Setup Photos.....</i>	<i>15</i>
	<i>Appendix B: System Check Plots</i>	<i>15</i>
	<i>Appendix C: Highest PD Test Plots</i>	<i>15</i>
	<i>Appendix D: Probe Certificate</i>	<i>15</i>
	<i>Appendix E: Verification source Certificate</i>	<i>15</i>



1. Attestation of Test Results

Applicant Name	SAMSUNG ELECTRONICS CO., LTD.	
FCC ID	A3LSMX710	
Applicable Standards	FCC 47 CFR § 2.1093	
Exposure Category	Radiofrequency (RF) Radiation Exposure (above 6GHz)	
	Uncontrolled (mW/cm ² over 4 cm ²) 30 min average	Occupational/controlled (mW/cm ² over 4 cm ²) 6 min average
	1.0	5
Applicable limit	<input checked="" type="checkbox"/> Uncontrolled / <input type="checkbox"/> Occupational/controlled	
PD Result (mW/cm ² over 4cm ²)	0.184	
Date Tested	2023-05-18	
Test Results	Pass	

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by a2La, or any agency of the U.S. government.

Approved & Released By:	Prepared By:
	
Devin Chang Senior Test Engineer UL Verification Services Inc.	Richard Jankovics Operations Leader UL LLC

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, the following FCC Published RF exposure KDB procedures:

- 447498 D01 General RF Exposure Guidance v06
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- SPEAG DASY8 System Handbook; DASY8 Module mmWave
- IEC TR 63170: 2018

In addition to the above, [TCB workshop](#) information was used.

- [TCB workshop](#) November, 2017; RF Exposure Procedures (Power Density Evaluation)
- [TCB workshop](#) October, 2018; RF Exposure Procedures (Millimeter Wave Assessment)
- [TCB workshop](#) April, 2019; RF Exposure Procedures (Millimeter Wave RF Exposure Evaluation)
- [TCB workshop](#) November, 2019; RF Exposure Procedures (Millimeter Wave Scan Requirements)
- [TCB workshop](#) October 2020; RF Exposure Procedures (U NII 6-7 GHz RF Exposure)

3. Facilities and Accreditation


UL LLC is accredited by A2LA, cert. # 0751.06 for all testing performed within the scope of this report. Testing was performed at the locations noted below.

	Address	ISED CABID	ISED Company Number	FCC Registration
<input type="checkbox"/>	Building: 12 Laboratory Dr RTP, NC 27709, U.S.A	US0067	2180C	825374
<input checked="" type="checkbox"/>	Building: 2800 Perimeter Park Dr. Suite B Morrisville, NC 27560, U.S.A	US0067	27265	825374


4. Measurement System & Test Equipment

4.1. E-UmmWVx / E-Field 5G Probe

E-Field mm-Wave Probe for General Near-Field Measurements

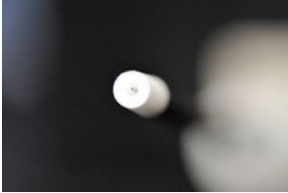
	<p>Two dipoles optimally arranged to obtain pseudo-vector information Minimum 3 measurements/point, 120° rotated around probe axis Sensors (0.8mm length) printed on glass substrate protected by high density foam</p> <p>Low perturbation of the measured field</p> <p>Requires positioner which can do accurate probe rotation</p>
Frequency Range	750 MHz – 110 GHz (EUmmWV4)
Dynamic Range	< 20 V/m – 10 000 V/m with PRE-10 (min < 50 V/m - 3000 V/m)
Position Precision	< 0.2 mm (DASY8)
Dimensions	<p>Overall length: 337 mm (tip: 20 mm)</p> <p>Tip diameter: encapsulation 8 mm (internal sensor < 1mm)</p> <p>Distance from probe tip to dipole centers: < 2 mm</p> <p>Sensor displacement to probe's calibration point: < 0.3 mm</p>
Applications	<p>E-field measurements of 5G devices and other mm-wave transmitters operating above 6GHz in < 2 mm distance from device (free-space) Power density, H-field and far-field analysis using total field reconstruction (DASY8 Module mmWave)</p>
Compatibility	DASY8 Module mmWave V3.0.0.841

4.2. Data Acquisition Electronics(DAE)

	<p>Serial optical link for communication with DASY8 embedded system (fully remote controlled)</p> <p>Two-step probe touch detector for mechanical surface detection and emergency robot stop</p>
Measurement Range	-100 – +300 mV (16 bit resolution and two range settings: 4 mV, 400 mV)
Input Offset Voltage	<5 μV (with auto zero)
Input Resistance	200 Mohm
Input Bias Current	<50 fA
Battery Power	>10 hours of operation (with two 9.6 V NiMH batteries)
Dimensions (L × W × H)	60 × 60 × 68 mm

4.3. Measurement System

The DASY8 system used for performing compliance tests consists of the following items:

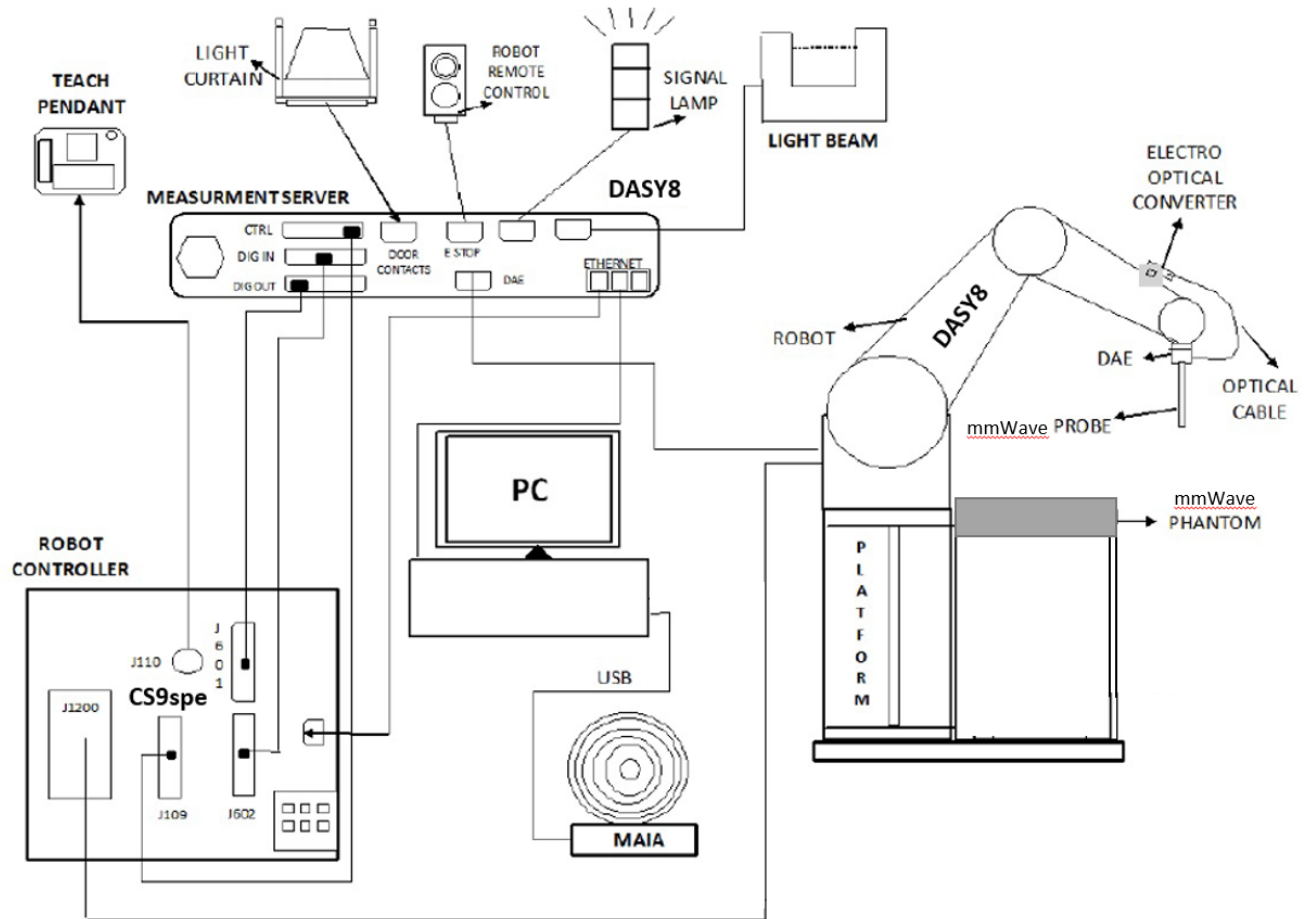

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- The EUmmWVx probe is based on the pseudo-vector probe design, which not only measures the field magnitude but also derives its polarization ellipse.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win10 and the DASY8¹ software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom which is specialized for 5G other accessories according to the targeted measurement.

¹ DASY8 software used: DASY mmWave 3.0.0.841 and older generations.

4.4. Measurement Procedures

4.4.1 System Verification Scan Procedures

DASY8_Module mmWave supports “5G Scan”, a fine resolution scan performed on two different planes which is used to reconstruct the E- and H-fields as well as the power density; the average power density is derived from this measurement.

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to device under test.

Step 2: 5G Scan

The steps in the X, Y, and Z directions are specified in terms of fractions of the signal wavelength, λ . Area Scan Parameters extracted from SPEAG DASY 6System Handbook; part 4 DASY8 Module mmWave.

Recommended settings for measurement of verification sources

Frequency [GHz]	Grid step	Grid extent X/Y [mm]	Measurement points
10	0.125 $\left(\frac{\lambda}{8}\right)$	60/60	18×18
30	0.25 $\left(\frac{\lambda}{4}\right)$	60/60	26×26
45	0.25 $\left(\frac{\lambda}{4}\right)$	42/42	28×28
60	0.25 $\left(\frac{\lambda}{4}\right)$	32.5/32.5	28×28
90	0.25 $\left(\frac{\lambda}{4}\right)$	30/30	38×38

The minimum distance of probe sensors to the verification source surface, horn antenna, is 10 mm for 10 GHz and 5.55mm for 30 GHz and above.

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

When the drift is larger than $\pm 5\%$, test is repeated from step1.

4.4.2 Scan Procedures

Step 1: Power Reference Measurement

Same as System Verification Scan Procedures step 1.

Step 2: 5G Scan

Same as System Verification Scan Procedures step 2. But measurement area is defined based on TCB work shop April 2019, “A sufficiently large measurement region and proper measurement spatial resolution are required to maintain field reconstruction accuracy”.

–Fields at the measurement region boundary should be ~20-30 dB below the peaks

Step 3: Power drift measurement

Same as System Verification Scan Procedures step 3.

When the drift is smaller than $\pm 5\%$, it is considered in the uncertainty budget if drifts larger than 5%, uncertainty is re-calculate.

4.5 Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Signal Generator	Keysight	N5181A-506	MY50140788	1/12/2024
Power Meter	Keysight	N1912A	MY55090047	2/2/2024
Power Sensor	Keysight	N1921A	MY55090030	6/15/2023
Directional coupler	Mini-Circuits	ZUDC10-183+	1438	NA

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR1A)	SPEAG	EUmmWV4	9619	3/17/2024
Data Acquisition Electronics	SPEAG	DAE4	1715	1/23/2024
10 GHz Verification Source	SPEAG	SM 003 120 AA	1040	1/19/2024

5 Measurement Uncertainty

a	b	c	d f(d,k)	e	f = b×e/d	g	
Error Description	Unc. Value (±dB)	Probab. Distri.	Div.	<i>c_i</i>	Std. Unc. (±dB)	<i>v_i</i>	
Uncertainty terms dependent on the measurement system							
Calibration	0.49	Normal	1	1	0.49	∞	
Probe correction	0	Rectangular	1.732	1	0	∞	
Frequency response (BW □ 1 GHz)	0.20	Rectangular	1.732	1	0.12	∞	
Sensor cross coupling	0	Rectangular	1.732	1	0	∞	
Isotropy	0.50	Rectangular	1.732	1	0.29	∞	
Linearity	0.20	Rectangular	1.732	1	0.12	∞	
Probe scattering	0	Rectangular	1.732	1	0	∞	
Probe positioning offset	0.30	Rectangular	1.732	1	0.17	∞	
Probe positioning repeatability	0.04	Rectangular	1.732	1	0.02	∞	
Sensor mechanical offset	0	Rectangular	1.732	1	0	∞	
Probe spatial resolution	0	Rectangular	1.732	1	0	∞	
Field impedance dependence	0	Rectangular	1.732	1	0	∞	
Amplitude and phase drift	0	Rectangular	1.732	1	0	∞	
Amplitude and phase noise	0.04	Rectangular	1.732	1	0.02	∞	
Measurement area truncation	0	Rectangular	1.732	1	0	∞	
Data acquisition	0.03	Normal	1	1	0.03	∞	
Sampling	0	Rectangular	1.732	1	0	∞	
Field reconstruction	0.60	Rectangular	1.732	1	0.35	∞	
Forward transformation	0	Rectangular	1.732	1	0	∞	
Power density scaling	-	Rectangular	1.732	1	-	∞	
Spatial averaging	0.10	Rectangular	1.732	1	0.06	∞	
System detection limit	0.04	Rectangular	1.732	1	0.02	∞	
Uncertainty terms dependent on the DUT and environmental factors							
Probe coupling with DUT	0	Rectangular	1.732	1	0	∞	
Modulation response	0.40	Rectangular	1.732	1	0.23	∞	
Integration time	0	Rectangular	1.732	1	0	∞	
Response time	0	Rectangular	1.732	1	0	∞	
Device holder influence	0.10	Rectangular	1.732	1	0.06	∞	
DUT alignment	0	Rectangular	1.732	1	0	∞	
RF ambient conditions	0.04	Rectangular	1.732	1	0.02	∞	
Ambient reflections	0.04	Rectangular	1.732	1	0.02	∞	
Immunity / secondary reception	0	Rectangular	1.732	1	0	∞	
Drift of the DUT	0.21	Rectangular	1.732	1	0.12	∞	
Combined Standard Uncertainty $U_c(f) =$					RSS	0.76	∞
Expanded Uncertainty U , Coverage Factor = 2, > 95 % Confidence =						1.52	

6 Device Under Test (DUT) Information

6.1 DUT Description

Device Dimension	Overall (Length x Width): 254 mm x 167 mm Overall Diagonal: 296 mm Display Diagonal: 277 mm This is a Tablet device (overall diagonal dimension of the display section of a laptop or tablet is > 20 cm)								
Back Cover	The Back Cover is not removable								
Battery Options	The rechargeable battery is not user accessible.								
Test sample information	<table border="1"> <thead> <tr> <th>S/N</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>R32W2005BLK</td> <td>WLAN Conducted</td> </tr> <tr> <td>R32W2005B3D</td> <td>WLAN Radiated</td> </tr> <tr> <td>R32W2005BEP</td> <td>WLAN Radiated</td> </tr> </tbody> </table>	S/N	Notes	R32W2005BLK	WLAN Conducted	R32W2005B3D	WLAN Radiated	R32W2005BEP	WLAN Radiated
S/N	Notes								
R32W2005BLK	WLAN Conducted								
R32W2005B3D	WLAN Radiated								
R32W2005BEP	WLAN Radiated								
Hardware Version	REV0.1								
Software Version	X710.001								

6.2 Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
Wi-Fi 6E	6 GHz	802.11ax (HE20) 802.11ax (HE40) 802.11ax (HE80) 802.11ax (HE160)	99.7% ¹ (802.11ax 160MHz BW)

Notes:

- Duty cycle is referenced from the UL Report R14720543-S1.

7 RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Power density evaluated at worst-surfaces/channel according to test results of R14720543-S1 SAR report. Per TCB workshop October 2020 presentation, PD testing with the mmWave probe is performed on the highest SAR test configurations. Testing was performed on BT/WIFI2, Back, channel 207.

8 System Performance Check

Per Nov 2017,TCB Workshop

System validation is required before a system is deployed for measurement.

System check is also required before each series of continuous measurement and, as applicable, repeated at least weekly.

Peak and spatially averaged power density at the peak location(s) must be compared to calibrated results according to the defined test conditions

- the same spatial resolution and measurement region used in the waveguide calibration should be applied to system validation and system check.
- 1 cm² and 4 cm² spatial averaging have been recommended in the AHG10 draft TR with reference targets available for specific waveguide.
- power density distribution should also be verified, both spatially (shape) and numerically (level) through visual inspection for noticeable differences.
- the measured results should be within 10% of the calibrated targets.

The system components, software settings and other system parameters shall be the same as those used for the compliance tests. The system check shall be performed at closest probe calibration frequency point as in the compliance tests, e.g., if the EUT operates at 35 GHz, it is recommended to perform the validation at 30 GHz.

SAR Lab	Date	5G Verification Source_SN	Cal. Due Date	Measured Results for W/m ² over 4 cm ²						Plot No.
				psPDn+ Meas. (W/m ²)	psPDtot+ Meas. (W/m ²)	psPDmod+ Meas. (W/m ²)	psPD Avg Meas. (W/m ²)	Square Avg Target (W/m ²)	Deviation (%)	
1A	5/18/2023	1040	1/19/2024	55.9	57.1	57.3	56.8	54.0	5.12	1

Note(s):

None.

9 Measured and Reported (Scaled) Results

Per TCB workshop October 2018, 4 cm² averaging area is considered.

1. psPD value (mW/cm²) used the pS_{tot} avg value (W/m²) of test result plot.

9.1 Wi-Fi 6 GHz (U-NII Bands)

Band	Mode	Antenna	Dist. (mm)	Test Position	Freq. (MHz)	Ch #.	Duty Cycle	Power (dBm)		Power Density mW/cm ² over 4cm ²				Plot No.
								Tune-up Limit	Meas.	pS _{tot} avg (mW/cm ²)		pS _{tot} avg (mW/cm ²)		
										Meas.	Scaled	Meas.	Scaled	
Wi-Fi 6E	802.11ax	BT/WIFI2	2	Back	6985	207	99.7%	8.0	6.2	0.057	0.087	0.121	0.184	1

Note(s):

None.

10 Simultaneous Transmission Conditions

Total exposure ratio calculated by taking ratio of reported SAR divided by SAR limit and adding it to measured power density divided by power density limit. Numerical sum of the two ratios should be less than 1

$$TER = \sum_{a=1}^A \frac{SAR_a}{SAR_{a, limit}} + \sum_{b=1}^B \frac{psPD_b}{psPD_{b, limit}} < 1$$

10.1 Simultaneous Transmission Combinations

Item	Simultaneous scenario	DTS Ant.1	DTS Ant.2	UNII Ant.1	UNII Ant.2	BT Ant.1	BT Ant.2
1	DTS MIMO	On	On				
2	DTS + BT		On			On	
3	UNII MIMO + BT			On	On	On	
4				On	On		On

10.2 Simultaneous Transmission Results

Range	Max SAR or PD	Unit	Limit	Result	Ratio
Below 6GHz	Worst case simultaneous transmission reported from R14720543-S1	W/kg	1.6	0.293	0.183
Above 6GHz	Worst case PD refer to section 9	mW/cm ²	1.0	0.184	0.184
TOTAL RATIO LIMIT < 1			SUM of ratio		0.367

Total exposure ratio: $SAR/SAR_{Limit} + PD/PD_{Limit} < 1$

Conclusion:

Simultaneous transmission PD is compliant because the sum of the 4 cm² PD is < 1 mW/cm² and the total exposure ratio is < 1

Appendixes

Refer to separated files for the following appendixes.

Appendix A: Setup Photos

Appendix B: System Check Plots

Appendix C: Highest PD Test Plots

Appendix D: Probe Certificate

Appendix E: Verification source Certificate

END OF REPORT