

# FCC LTE REPORT

## Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Date of Issue:**  
December 09, 2021

**Address:**  
129, Samsung-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Location:**  
HCT CO., LTD.,  
74, Seoicheon-ro 578beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

**Report No.:** HCT-RF-2111-FC078-R1

**FCC ID:** A3LSMX806B

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

According to the Evaluation report, all of the data contained herein is reused from the reference  
 FCC ID : A3LSMX808U report.

Model(s): SM-X806B  
 EUT Type: Tablet  
 FCC Classification: PCS Licensed Transmitter (PCB)  
 FCC Rule Part(s): §90, §22, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	Conducted Output Power	
				Max. Power (W)	Max. Power (dBm)
LTE – Band26 (1.4)	814.7 – 824.0	1M10G7D	QPSK	0.257	24.10
		1M10W7D	16QAM	0.220	23.42
		1M10W7D	64QAM	0.170	22.30
		1M10W7D	256QAM	0.078	18.92
LTE – Band26 (3)	815.5 – 824.0	2M71G7D	QPSK	0.255	24.07
		2M72W7D	16QAM	0.223	23.48
		2M71W7D	64QAM	0.174	22.41
		2M71W7D	256QAM	0.079	18.98
LTE – Band26 (5)	816.5 – 824.0	4M52G7D	QPSK	0.258	24.11
		4M52W7D	16QAM	0.223	23.49
		4M52W7D	64QAM	0.167	22.23
		4M52W7D	256QAM	0.079	18.99
LTE – Band26 (10)	819.0 – 824.0	8M98G7D	QPSK	0.255	24.07
		8M99W7D	16QAM	0.217	23.36
		8M99W7D	64QAM	0.164	22.14
		9M00W7D	256QAM	0.078	18.94
LTE – Band26 (15)	821.5	13M5G7D	QPSK	0.246	23.91
		13M5W7D	16QAM	0.212	23.26
		13M5W7D	64QAM	0.160	22.05
		13M4W7D	256QAM	0.078	18.94

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report No.: HCT-RF-2111-FC078-R1

---

REVIEWED BY



---

Report prepared by : Jung Ki Lim  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2111-FC078	November 26, 2021	- First Approval Report
HCT-RF-2111-FC078-R1	December 09, 2021	- Revised the 1, 15, 19 page.

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Table of Contents

REVIEWED BY .....	2
1. GENERAL INFORMATION .....	5
2. INTRODUCTION .....	6
2.1. DESCRIPTION OF EUT.....	6
2.2. MEASURING INSTRUMENT CALIBRATION .....	6
2.3. TEST FACILITY .....	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE .....	7
3.2 CONDUCTED OUTPUT POWER.....	8
3.3 RADIATED POWER.....	9
3.4 RADIATED SPURIOUS EMISSIONS .....	10
3.5 OCCUPIED BANDWIDTH. ....	11
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	12
3.7 CHANNEL EDGE.....	13
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	14
3.9 WORST CASE(RADIATED TEST) .....	15
3.10 WORST CASE(CONDUCTED TEST) .....	16
4. LIST OF TEST EQUIPMENT .....	17
5. MEASUREMENT UNCERTAINTY .....	18
6. SUMMARY OF TEST RESULTS .....	19
7. SAMPLE CALCULATION .....	20
8. TEST DATA .....	22
8.1 CONDUCTED OUTPUT POWER.....	22
8.2 EFFECTIVE RADIATED POWER.....	27
8.3 RADIATED SPURIOUS EMISSIONS .....	29
8.4 OCCUPIED BANDWIDTH .....	30
8.5 CONDUCTED SPURIOUS EMISSIONS .....	31
8.6 CHANNEL EDGE.....	31
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	32
8.8 STADDLE CHANNEL .....	37
8.8.1 CONDUCTED OUTPUT POWER.....	37
8.8.2 EFFECTIVE RADIATED POWER .....	41
8.8.3 RADIATED SPURIOUS EMISSIONS .....	42
8.8.4 CONDUCTED SPURIOUS EMISSIONS .....	43
8.8.5 CHANNEL EDGE(Part90) .....	43
8.8.6 BAND EDGE(Part22) .....	43
9. TEST PLOTS.....	44
10. TEST PLOTS (STRADDLE CHANNEL).....	93
11 ANNEX A_ TEST SETUP PHOTO .....	118

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMX806B
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter (PCB)
<b>FCC Rule Part(s):</b>	§90, §22, §2
<b>EUT Type:</b>	Tablet
<b>Model(s):</b>	SM-X806B
<b>Tx Frequency:</b>	814.7 MHz – 823.3 MHz (LTE – Band 26 (1.4 MHz)) 815.5 MHz – 822.5 MHz (LTE – Band 26 (3 MHz)) 816.5 MHz – 821.5 MHz (LTE – Band 26 (5 MHz)) 819.0 MHz (LTE – Band 26 (10 MHz)) 821.5 MHz (LTE – Band 26 (15 MHz))
<b>Date(s) of Tests:</b>	September 17, 2021 ~ November 16, 2021
<b>Serial number:</b>	R32RB00QM0V

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Tablet with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160), WIFI 6E, Bluetooth, BT LE, WPT.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

### 3.2 CONDUCTED OUTPUT POWER

#### Test Overview


According to ANSI C63.26-2015 Section 5.2.1 when measuring the maximum RF output power from such devices, control over the EUT must be provided either through special test software (provided by manufacturer specifically for compliance testing, but not accessible by an end user) or through use of a base station emulator, communications test set, call box, or similar instrumentation that is capable of establishing a communications link with the EUT to enable control over variable parameters (e.g., output power, OBW, etc.).

In some cases, these instruments also include basic digital spectrum analyzer and/or power meter capabilities that can be utilized to measure the RF output power if the specified detectors and requirements can be realized and the measurement functions have been calibrated.

#### Test Procedure

1. The RF port of the EUT was connected to the Communication Tester via an RF cable.
2. Conducted average power was measured using a calibrated Radio Communication Tester.

#### Test setup

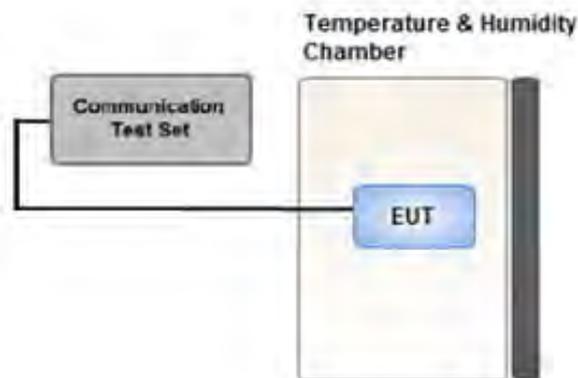

### 3.3 RADIATED POWER

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

#### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $>$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

#### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.4 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

### 3.5 OCCUPIED BANDWIDTH.

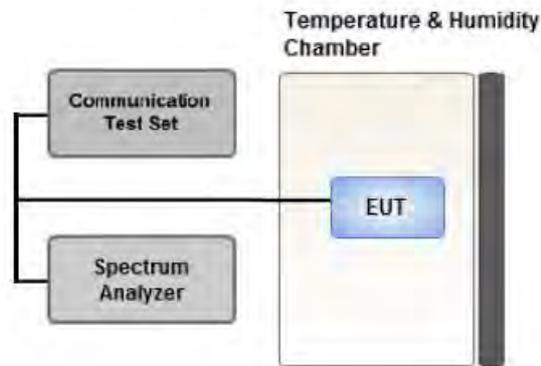

**Test setup**

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### **Test Settings**

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

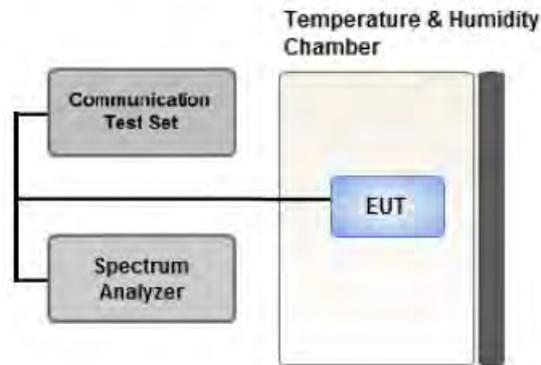

**Test setup**

#### **Test Overview**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

### 3.7 CHANNEL EDGE

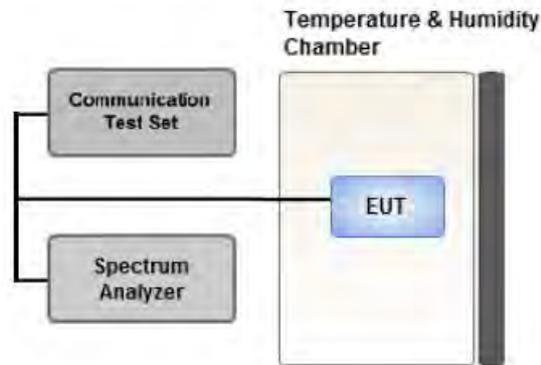

#### Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW :
  - .- EA licensee's frequency block by up to and including 37.5 kHz : 300 Hz
  - .- EA licensee's frequency block greater than 37.5 kHz : 100 kHz
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

#### Test Notes

For 90.691(a), RBW=300 Hz for offset less than 37.5 kHz from channel edge and RBW=100 kHz for offsets greater than 37.5 kHz is allowed.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

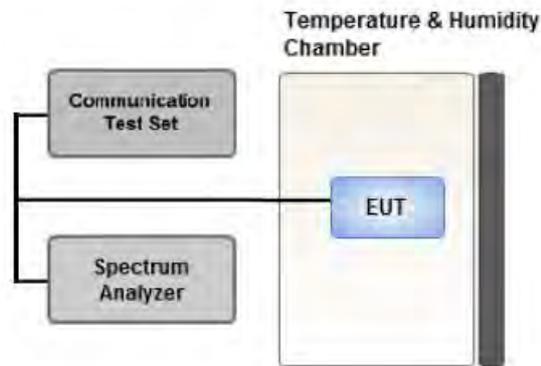

**Test setup**

#### **Test Overview**

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115% of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### **Test Settings**

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**3.9 WORST CASE(RADIATED TEST)**

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
  - All modes of operation were investigated and the worst case configuration results are reported.
  - In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 5 MHz, 1.4 MHz (Straddle Channel))
  - The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
  - All modes of operation were tested and the worst case results are reported.
  - Please refer to the table below.
  - All modes of operation were investigated and the worst case configuration results are reported.
- Mode : Stand alone, Stand alone + External accessories (Earphone, keyboard, AC adapter, etc)  
 Worst case : Stand alone

[ Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
<b>Effective Radiated Power</b>	QPSK, 16QAM, 64QAM, 256QAM	1	0	Z
<b>Radiated Spurious and Harmonic Emissions</b>	QPSK	1	0	Z

**3.10 WORST CASE(CONDUCTED TEST)**

- Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5	High	Full RB	0
	QPSK, 16QAM, 64QAM, 256QAM	10, 15	Mid	Full RB	0
Channel Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Mid	1	0
				1	49
		15	Mid	1	0
				1	74
1.4, 3, 5	Low, High	Full RB	0		
10, 15	Mid	Full RB	0		
Band Edge (Staddle Channel)	QPSK	1.4	Mid	1	5
		3	Mid	1	14
		5	Mid	1	24
		10	Mid	1	49
		1.4, 3, 5, 10	Mid	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5	Low, High	1	0
		10, 15	Mid	1	0

#### 4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	03/02/2022	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	03/02/2022	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	04/07/2022	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/28/2022	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/15/2022	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2022	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	02/11/2022	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/18/2022	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	09/29/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/19/2022	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/12/2022	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/07/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Channel Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §90.691	< 50 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5 kHz of Block Edge	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046 §90.635	< 100 Watts	PASS
Frequency stability / variation of ambient temperature	§2.1055, §90.213 §22.355	< 2.5 ppm	PASS

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP (Only 15 MHz B.W)	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §90.691 §22.917(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 CONDUCTED OUTPUT POWER

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				814.7 MHz		823.3 MHz		
				dBm	W	dBm	W	
1.4	QPSK	1	0	23.90	0.245	23.91	0.246	100
		1	3	23.83	0.242	23.85	0.243	100
		1	5	23.93	0.247	23.98	0.250	100
		3	0	23.89	0.245	23.91	0.246	100
		3	1	23.87	0.244	23.90	0.245	100
		3	3	23.85	0.243	23.88	0.244	100
		6	0	22.84	0.192	22.87	0.194	100
	16QAM	1	0	23.40	0.219	23.41	0.219	100
		1	3	23.12	0.205	23.37	0.217	100
		1	5	23.10	0.204	23.15	0.207	100
		3	0	22.98	0.199	22.99	0.199	100
		3	1	22.98	0.199	23.00	0.200	100
		3	3	22.88	0.194	22.91	0.195	100
		6	0	21.97	0.157	21.99	0.158	100
	64QAM	1	0	22.02	0.159	22.05	0.160	100
		1	3	21.94	0.156	21.96	0.157	100
		1	5	21.95	0.157	21.98	0.158	100
		3	0	22.05	0.160	22.08	0.161	100
		3	1	21.90	0.155	21.95	0.157	100
		3	3	21.81	0.152	21.90	0.155	100
		6	0	20.83	0.121	20.91	0.123	100
	256QAM	1	0	18.74	0.075	18.77	0.075	100
		1	3	18.70	0.074	18.75	0.075	100
		1	5	18.78	0.076	18.81	0.076	100
		3	0	18.79	0.076	18.92	0.078	100
		3	1	18.81	0.076	18.83	0.076	100
		3	3	18.82	0.076	18.84	0.077	100
		6	0	18.74	0.075	18.79	0.076	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				815.5 MHz		822.5 MHz		
				dBm	W	dBm	W	
3	QPSK	1	0	23.85	0.243	23.88	0.244	100
		1	7	23.82	0.241	23.85	0.243	100
		1	14	23.74	0.237	23.77	0.238	100
		8	0	22.78	0.190	22.80	0.191	100
		8	3	22.79	0.190	22.81	0.191	100
		8	7	22.90	0.195	22.92	0.196	100
		15	0	22.88	0.194	22.90	0.195	100
	16QAM	1	0	23.07	0.203	23.09	0.204	100
		1	7	23.18	0.208	23.22	0.210	100
		1	14	22.99	0.199	23.00	0.200	100
		8	0	21.76	0.150	21.82	0.152	100
		8	3	21.90	0.155	21.95	0.157	100
		8	7	21.92	0.156	21.94	0.156	100
		15	0	21.88	0.154	21.90	0.155	100
	64QAM	1	0	21.98	0.158	22.02	0.159	100
		1	7	21.93	0.156	21.98	0.158	100
		1	14	21.83	0.152	21.89	0.155	100
		8	0	20.69	0.117	20.72	0.118	100
		8	3	20.81	0.121	20.88	0.122	100
		8	7	20.82	0.121	20.89	0.123	100
		15	0	20.81	0.121	20.88	0.122	100
	256QAM	1	0	18.77	0.075	18.80	0.076	100
		1	7	18.76	0.075	18.79	0.076	100
		1	14	18.82	0.076	18.85	0.077	100
		8	0	18.87	0.077	18.90	0.078	100
		8	3	18.86	0.077	18.88	0.077	100
		8	7	18.86	0.077	18.88	0.077	100
		15	0	18.76	0.075	18.79	0.076	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				816.5 MHz		821.5 MHz		
				dBm	W	dBm	W	
5	QPSK	1	0	23.66	0.232	23.82	0.241	100
		1	12	23.90	0.245	23.95	0.248	100
		1	24	23.80	0.240	23.85	0.243	100
		12	0	22.75	0.188	22.80	0.191	100
		12	6	22.84	0.192	22.89	0.195	100
		12	11	22.88	0.194	22.91	0.195	100
		25	0	22.80	0.191	22.84	0.192	100
	16QAM	1	0	23.01	0.200	23.12	0.205	100
		1	12	22.99	0.199	23.05	0.202	100
		1	24	22.98	0.199	23.04	0.201	100
		12	0	21.78	0.151	21.81	0.152	100
		12	6	21.90	0.155	21.99	0.158	100
		12	11	21.79	0.151	21.87	0.154	100
		25	0	21.86	0.153	21.91	0.155	100
	64QAM	1	0	21.88	0.154	21.94	0.156	100
		1	12	21.93	0.156	22.11	0.163	100
		1	24	21.96	0.157	22.04	0.160	100
		12	0	20.73	0.118	20.85	0.122	100
		12	6	20.86	0.122	20.91	0.123	100
		12	11	20.79	0.120	20.88	0.122	100
		25	0	20.79	0.120	20.87	0.122	100
	256QAM	1	0	18.75	0.075	18.81	0.076	100
		1	12	18.80	0.076	18.84	0.077	100
		1	24	18.82	0.076	18.83	0.076	100
		12	0	18.87	0.077	18.89	0.077	100
		12	6	18.87	0.077	18.89	0.077	100
		12	11	18.88	0.077	18.91	0.078	100
		25	0	18.84	0.077	18.86	0.077	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				819 MHz		
				dBm	W	
10	QPSK	1	0	23.87	0.244	100
		1	24	24.03	0.253	100
		1	49	23.85	0.243	100
		25	0	22.71	0.187	100
		25	12	22.91	0.195	100
		25	24	22.83	0.192	100
		50	0	22.85	0.193	100
	16QAM	1	0	23.29	0.213	100
		1	24	23.33	0.215	100
		1	49	23.05	0.202	100
		25	0	21.70	0.148	100
		25	12	21.88	0.154	100
		25	24	21.86	0.153	100
		50	0	21.83	0.152	100
	64QAM	1	0	21.88	0.154	100
		1	24	22.11	0.163	100
		1	49	22.01	0.159	100
		25	0	20.70	0.117	100
		25	12	20.87	0.122	100
		25	24	20.84	0.121	100
		50	0	20.84	0.121	100
	256QAM	1	0	18.76	0.075	100
		1	24	18.77	0.075	100
		1	49	18.80	0.076	100
		25	0	18.81	0.076	100
		25	12	18.88	0.077	100
		25	24	18.88	0.077	100
		50	0	18.73	0.075	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				821.5 MHz		
				dBm	W	
15	QPSK	1	0	23.87	0.244	100
		1	36	23.88	0.244	100
		1	74	23.91	0.246	100
		36	0	22.66	0.185	100
		36	18	22.85	0.193	100
		36	39	22.84	0.192	100
		75	0	22.80	0.191	100
	16QAM	1	0	23.00	0.200	100
		1	36	23.06	0.202	100
		1	74	23.26	0.212	100
		36	0	21.63	0.146	100
		36	18	21.91	0.155	100
		36	39	21.74	0.149	100
		75	0	21.77	0.150	100
	64QAM	1	0	21.91	0.155	100
		1	36	21.94	0.156	100
		1	74	22.05	0.160	100
		36	0	20.64	0.116	100
		36	18	20.83	0.121	100
		36	39	20.88	0.122	100
		75	0	20.82	0.121	100
	256QAM	1	0	18.90	0.078	100
		1	36	18.85	0.077	100
		1	74	18.94	0.078	100
		36	0	18.91	0.078	100
		36	18	18.92	0.078	100
		36	39	18.93	0.078	100
		75	0	18.93	0.078	100

**8.2 EFFECTIVE RADIATED POWER**

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
814.7	LTE B26/ 1.4 MHz	QPSK	-28.87	33.67	-10.29	1.38	V	< 100	0.158	22.00
		16QAM	-29.64	32.90	-10.29	1.38	V		0.133	21.23
		64QAM	-30.72	31.82	-10.29	1.38	V		0.103	20.15
		256QAM	-33.86	28.68	-10.29	1.38	V		0.050	17.01
823.3		QPSK	-29.21	33.84	-10.25	1.39	V		0.166	22.20
		16QAM	-30.01	33.04	-10.25	1.39	V		0.138	21.40
		64QAM	-31.10	31.95	-10.25	1.39	V		0.107	20.31
		256QAM	-34.19	28.86	-10.25	1.39	V		0.053	17.22

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
815.5	LTE B26/ 3 MHz	QPSK	-29.41	33.17	-10.29	1.39	V	< 100	0.141	21.50
		16QAM	-30.21	32.37	-10.29	1.39	V		0.117	20.70
		64QAM	-31.29	31.29	-10.29	1.39	V		0.092	19.62
		256QAM	-34.36	28.22	-10.29	1.39	V		0.045	16.55
822.5		QPSK	-29.23	33.88	-10.26	1.39	V		0.167	22.24
		16QAM	-30.02	33.09	-10.26	1.39	V		0.140	21.45
		64QAM	-31.09	32.02	-10.26	1.39	V		0.109	20.38
		256QAM	-34.22	28.89	-10.26	1.39	V		0.053	17.25

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
816.5	LTE B26/ 5 MHz	QPSK	-29.46	33.23	-10.28	1.39	V	< 100	0.143	21.56
		16QAM	-30.25	32.44	-10.28	1.39	V		0.119	20.77
		64QAM	-31.30	31.39	-10.28	1.39	V		0.094	19.72
		256QAM	-34.42	28.27	-10.28	1.39	V		0.046	16.60
821.5		QPSK	-29.15	33.89	-10.26	1.39	V		0.168	22.24
		16QAM	-29.94	33.10	-10.26	1.39	V		0.140	21.45
		64QAM	-31.01	32.03	-10.26	1.39	V		0.109	20.38
		256QAM	-34.24	28.80	-10.26	1.39	V		0.052	17.15

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
819.0	LTE B26/ 10 MHz	QPSK	-29.37	33.51	-10.27	1.39	V	< 100	0.153	21.85
		16QAM	-30.14	32.74	-10.27	1.39	V		0.128	21.08
		64QAM	-31.24	31.64	-10.27	1.39	V		0.099	19.98
		256QAM	-34.67	28.21	-10.27	1.39	V		0.045	16.55

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
821.5	LTE B26/ 15 MHz	QPSK	-29.50	33.54	-10.26	1.39	V	< 7.00	0.155	21.89
		16QAM	-30.36	32.68	-10.26	1.39	V		0.127	21.03
		64QAM	-31.42	31.62	-10.26	1.39	V		0.099	19.97
		256QAM	-34.76	28.28	-10.26	1.39	V		0.046	16.63

**Note**

1. Limit: None (for reporting purposes only)

**8.3 RADIATED SPURIOUS EMISSIONS**

- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
26715 (816.5)	1 633.00	-52.95	9.50	-62.91	1.98	V	-55.39	-13.00
	2 449.50	-39.22	10.30	-43.61	2.46	H	-35.77	-13.00
	3 266.00	-56.74	10.89	-57.06	2.88	H	-49.05	-13.00
26765 (821.5)	1 643.00	-52.71	9.60	-63.09	1.98	V	-55.47	-13.00
	2 464.50	-34.28	10.42	-38.94	2.47	V	-30.98	-13.00
	3 286.00	-57.39	12.01	-58.95	2.88	V	-49.82	-13.00
	4 107.50	-56.37	12.58	-55.05	3.26	H	-45.73	-13.00

**8.4 OCCUPIED BANDWIDTH**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Band 26	1.4 MHz	823.3	QPSK	6	0	1.1006
			16QAM			1.0951
			64QAM			1.0988
			256QAM			1.0955
	3 MHz	822.5	QPSK	15		2.7115
			16QAM			2.7156
			64QAM			2.7078
			256QAM			2.7137
	5 MHz	821.5	QPSK	25		4.5187
			16QAM			4.5165
			64QAM			4.5196
			256QAM			4.5219
	10 MHz	819.0	QPSK	50		8.9817
			16QAM			8.9908
			64QAM			8.9935
			256QAM			8.9955
	15 MHz	821.5	QPSK	75		13.449
			16QAM			13.470
			64QAM			13.460
			256QAM			13.422

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 45 ~ 64.

**8.5 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	814.7	3.7020	27.976	-67.383	-39.407	-13.00
		823.3	3.1531	27.976	-67.067	-39.091	
	3	815.5	3.6870	27.976	-67.384	-39.408	
		822.5	3.1790	27.976	-66.941	-38.965	
	5	816.5	3.7274	27.976	-67.277	-39.301	
		821.5	3.7074	27.976	-67.101	-39.125	
	10	819.0	3.7074	27.976	-67.175	-39.199	
	15	821.5	3.6875	27.976	-67.042	-39.066	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 85 ~ 92.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Ext. Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


**8.6 CHANNEL EDGE**

- Plots of the EUT's Band Edge are shown Page 65 ~ 84.

**8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 814,700,000 Hz
- ▣ CHANNEL: 26697(1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	814 700 005	0.0	0.000 000	0.000
100 %		-30	814 700 000	-5.0	-0.000 001	-0.006
100 %		-20	814 700 009	3.8	0.000 000	0.005
100 %		-10	814 700 008	3.2	0.000 000	0.004
100 %		0	814 700 008	3.1	0.000 000	0.004
100 %		+10	814 700 002	-2.7	0.000 000	-0.003
100 %		+30	814 700 002	-2.4	0.000 000	-0.003
100 %		+40	814 700 010	5.0	0.000 001	0.006
100 %		+50	814 700 000	-4.8	-0.000 001	-0.006
Batt. Endpoint		3.400	+20	814 700 010	4.7	0.000 001

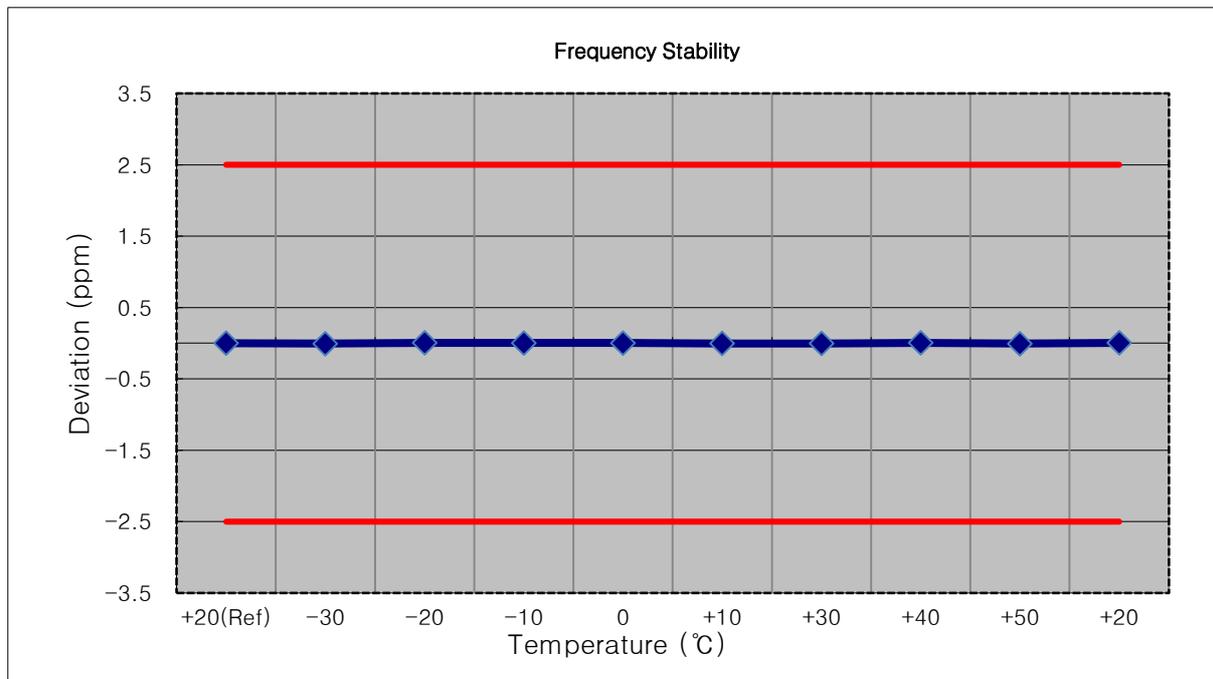


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 815,500,000 Hz
- ▣ CHANNEL: 26705(3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	815 499 993	0.0	0.000 000	0.000
100 %		-30	815 499 985	-7.5	-0.000 001	-0.009
100 %		-20	815 499 982	-10.9	-0.000 001	-0.013
100 %		-10	815 499 981	-11.6	-0.000 001	-0.014
100 %		0	815 499 980	-12.4	-0.000 002	-0.015
100 %		+10	815 499 985	-7.6	-0.000 001	-0.009
100 %		+30	815 499 979	-14.3	-0.000 002	-0.018
100 %		+40	815 499 984	-8.6	-0.000 001	-0.011
100 %		+50	815 499 979	-13.4	-0.000 002	-0.016
Batt. Endpoint		3.400	+20	815 500 005	12.2	0.000 001

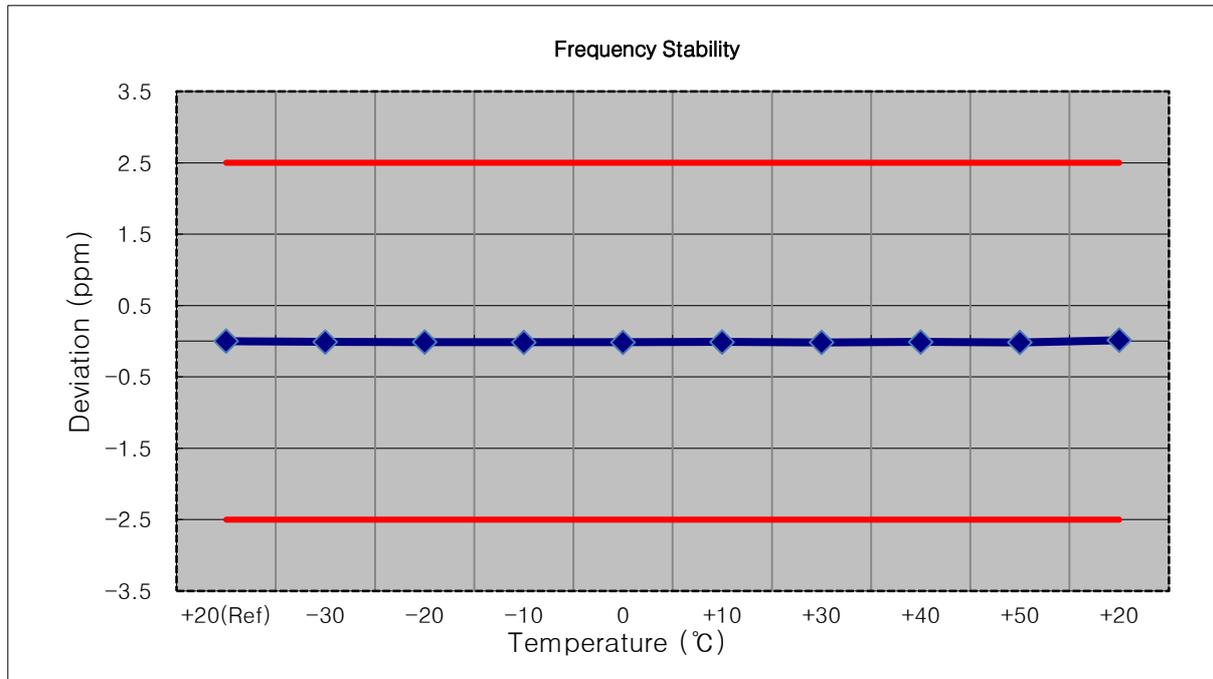


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 816,500,000 Hz
- ▣ CHANNEL: 26715(5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	816 499 994	0.0	0.000 000	0.000
100 %		-30	816 499 987	-6.5	-0.000 001	-0.008
100 %		-20	816 499 990	-4.1	-0.000 001	-0.005
100 %		-10	816 499 985	-8.4	-0.000 001	-0.010
100 %		0	816 499 985	-8.3	-0.000 001	-0.010
100 %		+10	816 499 987	-7.2	-0.000 001	-0.009
100 %		+30	816 499 987	-6.7	-0.000 001	-0.008
100 %		+40	816 499 988	-6.1	-0.000 001	-0.007
100 %		+50	816 499 988	-5.8	-0.000 001	-0.007
Batt. Endpoint	3.400	+20	816 499 989	-5.2	-0.000 001	-0.006

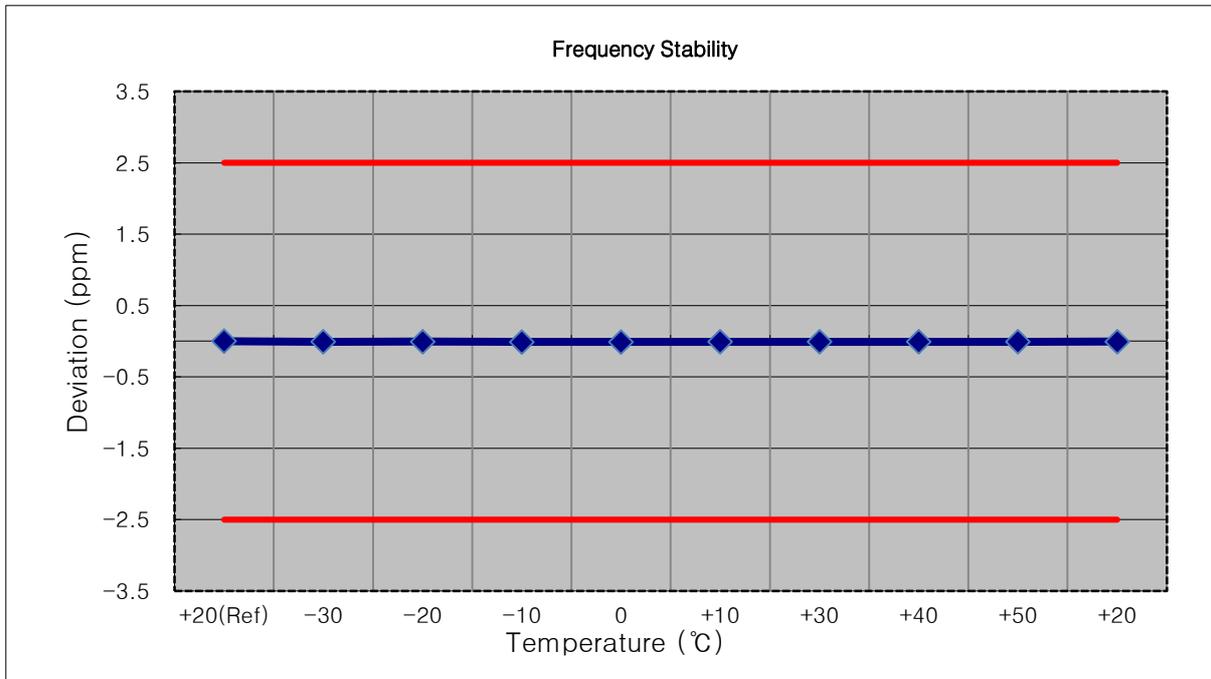


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 819,000,000 Hz
- ▣ CHANNEL: 26740(10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	819 000 025	0.0	0.000 000	0.000
100 %		-30	819 000 018	-6.4	-0.000 001	-0.008
100 %		-20	819 000 017	-8.0	-0.000 001	-0.010
100 %		-10	819 000 018	-6.2	-0.000 001	-0.008
100 %		0	819 000 018	-6.9	-0.000 001	-0.008
100 %		+10	819 000 019	-5.9	-0.000 001	-0.007
100 %		+30	819 000 021	-4.0	0.000 000	-0.005
100 %		+40	819 000 019	-5.9	-0.000 001	-0.007
100 %		+50	819 000 030	5.9	0.000 001	0.007
Batt. Endpoint		3.400	+20	819 000 018	-6.8	-0.000 001

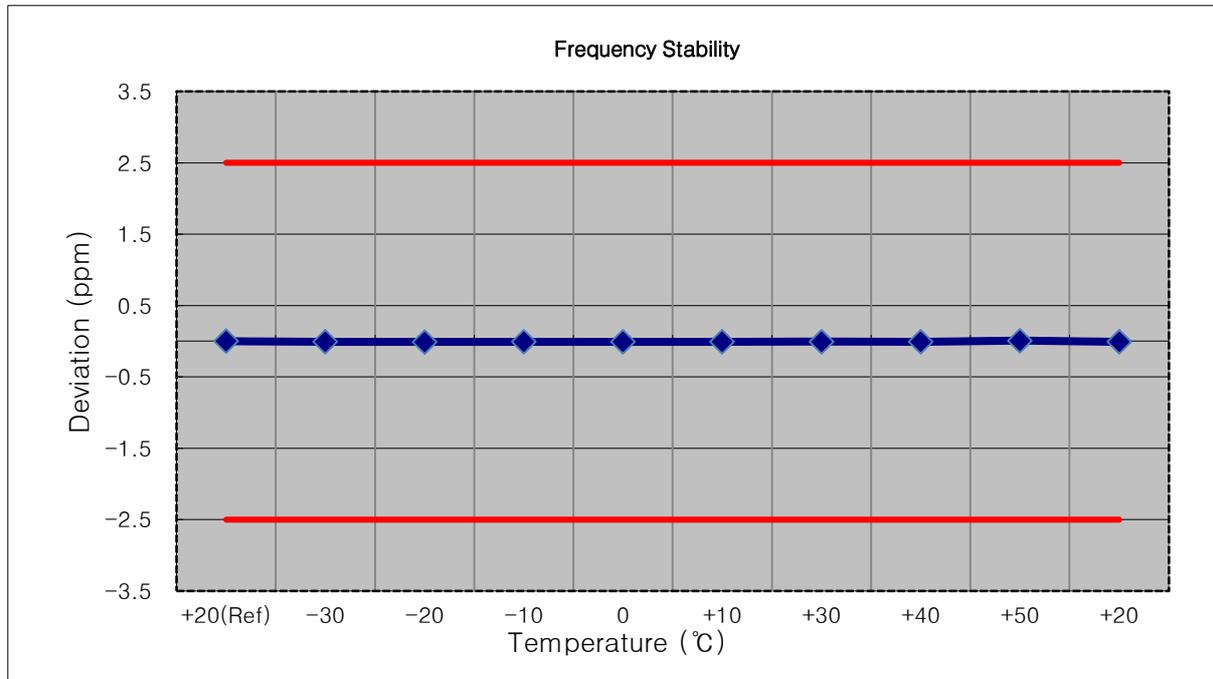

- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 821,500,000 Hz
- ▣ CHANNEL: 26765(15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	821 499 993	0.0	0.000 000	0.000
100 %		-30	821 499 987	-6.0	-0.000 001	-0.007
100 %		-20	821 499 989	-4.2	-0.000 001	-0.005
100 %		-10	821 499 989	-4.6	-0.000 001	-0.006
100 %		0	821 499 986	-7.0	-0.000 001	-0.009
100 %		+10	821 499 989	-3.7	0.000 000	-0.005
100 %		+30	821 499 987	-5.7	-0.000 001	-0.007
100 %		+40	821 499 986	-7.4	-0.000 001	-0.009
100 %		+50	821 499 989	-4.4	-0.000 001	-0.005
Batt. Endpoint		3.400	+20	821 499 989	-4.2	-0.000 001

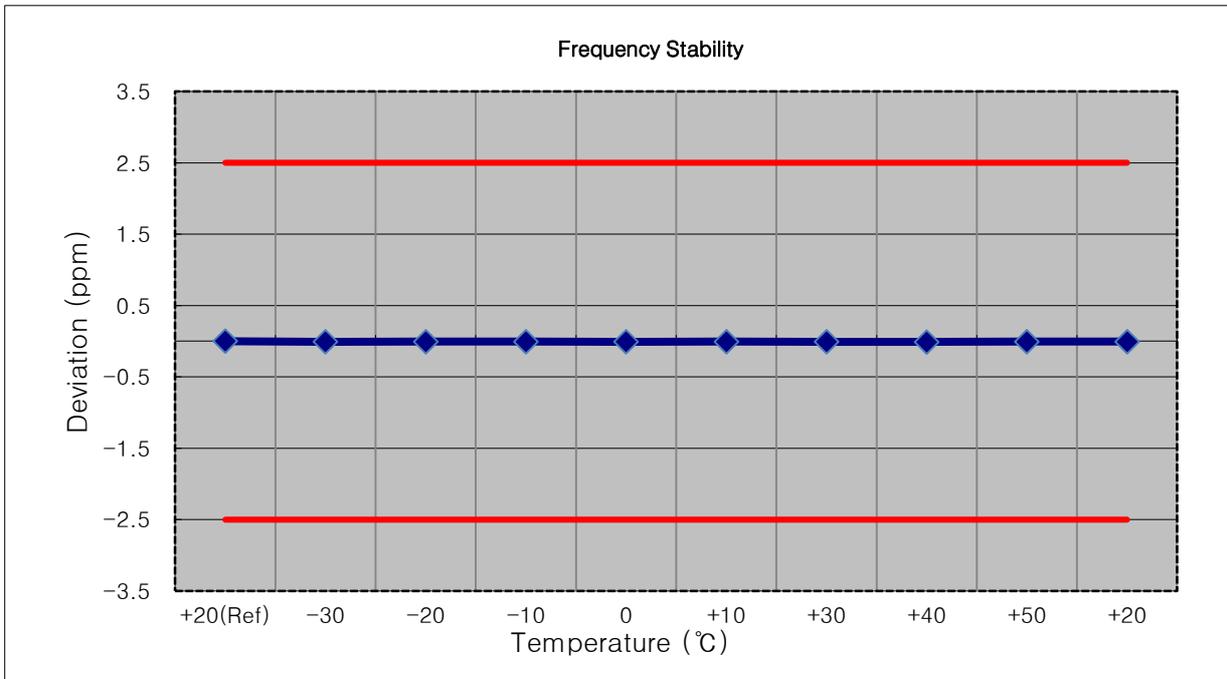

**8.8 STADDLE CHANNEL**

**8.8.1 CONDUCTED OUTPUT POWER**

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
1.4	QPSK	1	0	23.93	0.247	100
		1	3	24.10	0.257	100
		1	5	24.00	0.251	100
		3	0	23.93	0.247	100
		3	1	23.97	0.249	100
		3	3	23.97	0.249	100
		6	0	23.00	0.200	100
	16QAM	1	0	23.42	0.220	100
		1	3	23.41	0.219	100
		1	5	23.18	0.208	100
		3	0	23.16	0.207	100
		3	1	23.11	0.205	100
		3	3	23.07	0.203	100
		6	0	22.01	0.159	100
	64QAM	1	0	22.19	0.166	100
		1	3	22.30	0.170	100
		1	5	22.18	0.165	100
		3	0	22.15	0.164	100
		3	1	22.08	0.161	100
		3	3	22.06	0.161	100
		6	0	21.00	0.126	100
	256QAM	1	0	18.85	0.077	100
		1	3	18.81	0.076	100
		1	5	18.90	0.078	100
		3	0	18.82	0.076	100
		3	1	18.84	0.077	100
		3	3	18.91	0.078	100
		6	0	18.90	0.078	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
3	QPSK	1	0	24.00	0.251	100
		1	7	24.07	0.255	100
		1	14	24.01	0.252	100
		8	0	22.95	0.197	100
		8	3	22.97	0.198	100
		8	7	23.07	0.203	100
		15	0	23.00	0.200	100
	16QAM	1	0	23.38	0.218	100
		1	7	23.40	0.219	100
		1	14	23.48	0.223	100
		8	0	22.08	0.161	100
		8	3	22.05	0.160	100
		8	7	22.07	0.161	100
		15	0	22.00	0.158	100
	64QAM	1	0	22.41	0.174	100
		1	7	22.08	0.161	100
		1	14	22.15	0.164	100
		8	0	20.90	0.123	100
		8	3	21.00	0.126	100
		8	7	21.03	0.127	100
		15	0	21.02	0.126	100
	256QAM	1	0	18.88	0.077	100
		1	7	18.84	0.077	100
		1	14	18.98	0.079	100
		8	0	18.91	0.078	100
		8	3	18.94	0.078	100
		8	7	18.95	0.079	100
		15	0	18.96	0.079	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
5	QPSK	1	0	24.02	0.252	100
		1	12	24.08	0.256	100
		1	24	24.11	0.258	100
		12	0	22.95	0.197	100
		12	6	23.05	0.202	100
		12	11	23.01	0.200	100
		25	0	23.00	0.200	100
	16QAM	1	0	23.28	0.213	100
		1	12	23.33	0.215	100
		1	24	23.49	0.223	100
		12	0	21.91	0.155	100
		12	6	22.03	0.160	100
		12	11	22.00	0.158	100
		25	0	21.96	0.157	100
	64QAM	1	0	22.11	0.163	100
		1	12	22.23	0.167	100
		1	24	22.18	0.165	100
		12	0	20.91	0.123	100
		12	6	21.06	0.128	100
		12	11	21.00	0.126	100
		25	0	21.01	0.126	100
	256QAM	1	0	18.83	0.076	100
		1	12	18.85	0.077	100
		1	24	18.99	0.079	100
		12	0	18.94	0.078	100
		12	6	18.94	0.078	100
		12	11	18.93	0.078	100
		25	0	18.99	0.079	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
10	QPSK	1	0	23.91	0.246	100
		1	24	24.07	0.255	100
		1	49	23.91	0.246	100
		25	0	22.75	0.188	100
		25	12	22.95	0.197	100
		25	24	22.86	0.193	100
		50	0	22.88	0.194	100
	16QAM	1	0	23.32	0.215	100
		1	24	23.36	0.217	100
		1	49	23.10	0.204	100
		25	0	21.74	0.149	100
		25	12	21.91	0.155	100
		25	24	21.90	0.155	100
		50	0	21.88	0.154	100
	64QAM	1	0	21.91	0.155	100
		1	24	22.14	0.164	100
		1	49	22.05	0.160	100
		25	0	20.74	0.119	100
		25	12	20.93	0.124	100
		25	24	20.88	0.122	100
		50	0	20.89	0.123	100
	256QAM	1	0	18.81	0.076	100
		1	24	18.83	0.076	100
		1	49	18.85	0.077	100
		25	0	18.85	0.077	100
		25	12	18.94	0.078	100
		25	24	18.94	0.078	100
		50	0	18.80	0.076	100

**8.8.2 EFFECTIVE RADIATED POWER**

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
824.0	LTE B26/ 1.4 MHz	QPSK	-29.19	33.74	-10.25	1.39	V	< 7.00	0.162	22.10
		16QAM	-29.97	32.96	-10.25	1.39	V		0.135	21.32
		64QAM	-31.11	31.82	-10.25	1.39	V		0.104	20.18
		256QAM	-34.17	28.76	-10.25	1.39	V		0.051	17.12

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
824.0	LTE B26/ 3 MHz	QPSK	-29.25	33.68	-10.25	1.39	V	< 7.00	0.160	22.04
		16QAM	-30.05	32.88	-10.25	1.39	V		0.133	21.24
		64QAM	-31.10	31.83	-10.25	1.39	V		0.104	20.19
		256QAM	-34.21	28.72	-10.25	1.39	V		0.051	17.08

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
824.0	LTE B26/ 5 MHz	QPSK	-29.22	33.71	-10.25	1.39	V	< 7.00	0.161	22.07
		16QAM	-29.97	32.96	-10.25	1.39	V		0.135	21.32
		64QAM	-31.08	31.85	-10.25	1.39	V		0.105	20.21
		256QAM	-34.28	28.65	-10.25	1.39	V		0.050	17.01

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit W	ERP	
									W	dBm
824.0	LTE B26/ 10 MHz	QPSK	-29.20	33.73	-10.25	1.39	V	< 7.00	0.162	22.09
		16QAM	-29.98	32.95	-10.25	1.39	V		0.135	21.31
		64QAM	-31.07	31.86	-10.25	1.39	V		0.105	20.22
		256QAM	-34.54	28.39	-10.25	1.39	V		0.047	16.75

**8.8.3 RADIATED SPURIOUS EMISSIONS**

- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
26790 (824.0)	1 648.00	-52.40	9.70	-62.72	1.99	H	-55.01	-13.00
	2 472.00	-28.00	10.46	-32.65	2.47	H	-24.66	-13.00
	3 296.00	-57.88	12.07	-59.37	2.89	V	-50.18	-13.00
	4 120.00	-50.83	12.56	-49.35	3.26	H	-40.05	-13.00

**8.8.4 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	824.0	3.1591	27.976	-67.449	-39.473	-13.00
	3		3.6975	27.976	-67.093	-39.117	
	5		3.7214	27.976	-67.341	-39.365	
	10		3.6681	27.976	-67.436	-39.460	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 94 ~ 97.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131

**8.8.5 CHANNEL EDGE(Part90)**

- Test Channel : 26790(824.0MHz)

Plots of the EUT's Band Edge are shown Page 98 ~ 109.


**8.8.6 BAND EDGE(Part22)**

- Test Channel : 26790(824.0 MHz)


- Plots of the EUT's Band Edge are shown Page 110 ~ 117.

## 9. TEST PLOTS


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 QPSK RB 6\_0)

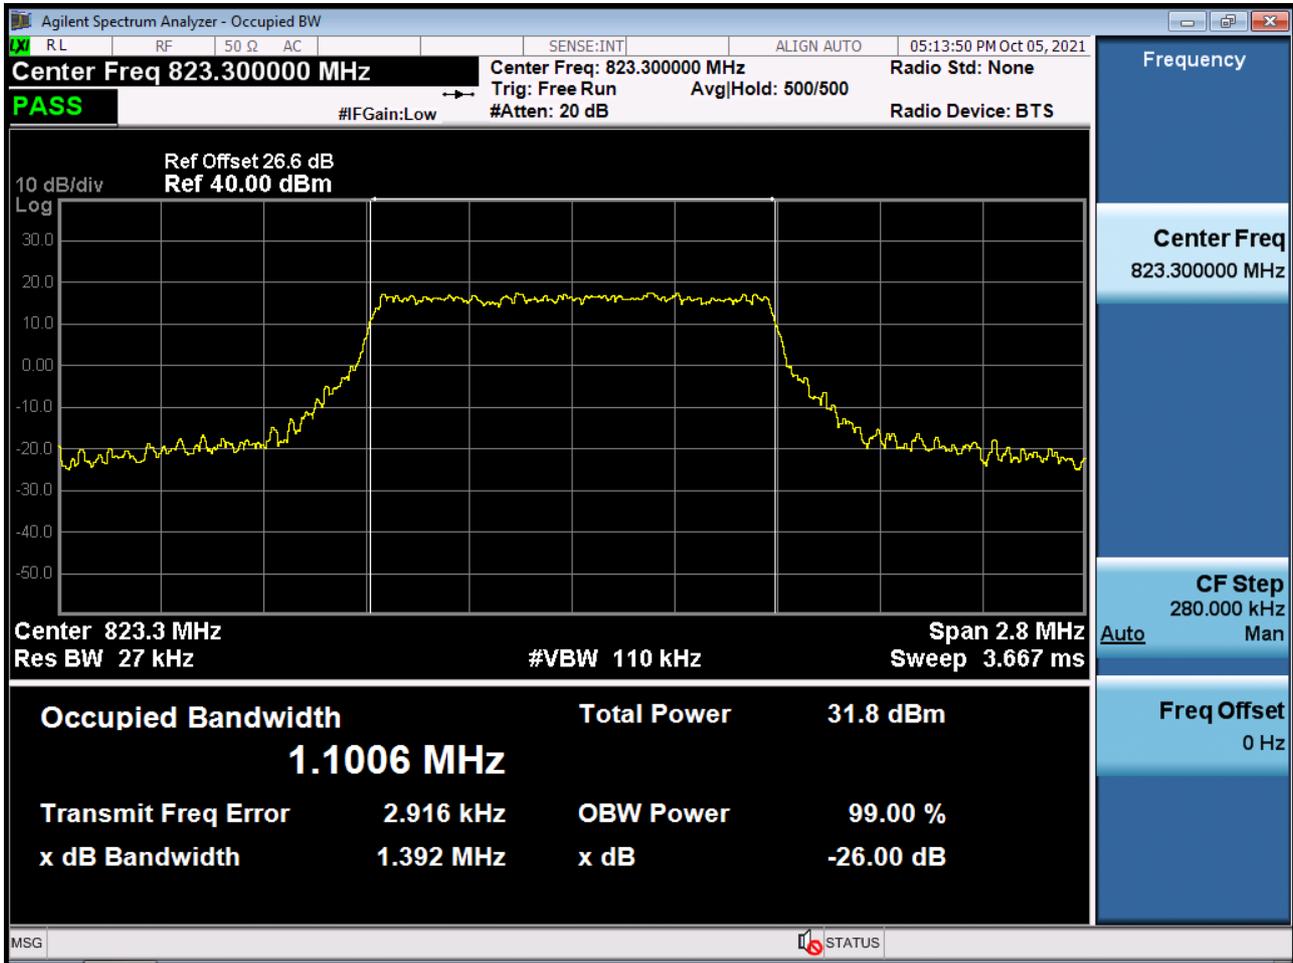


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 16QAM RB 6\_0)

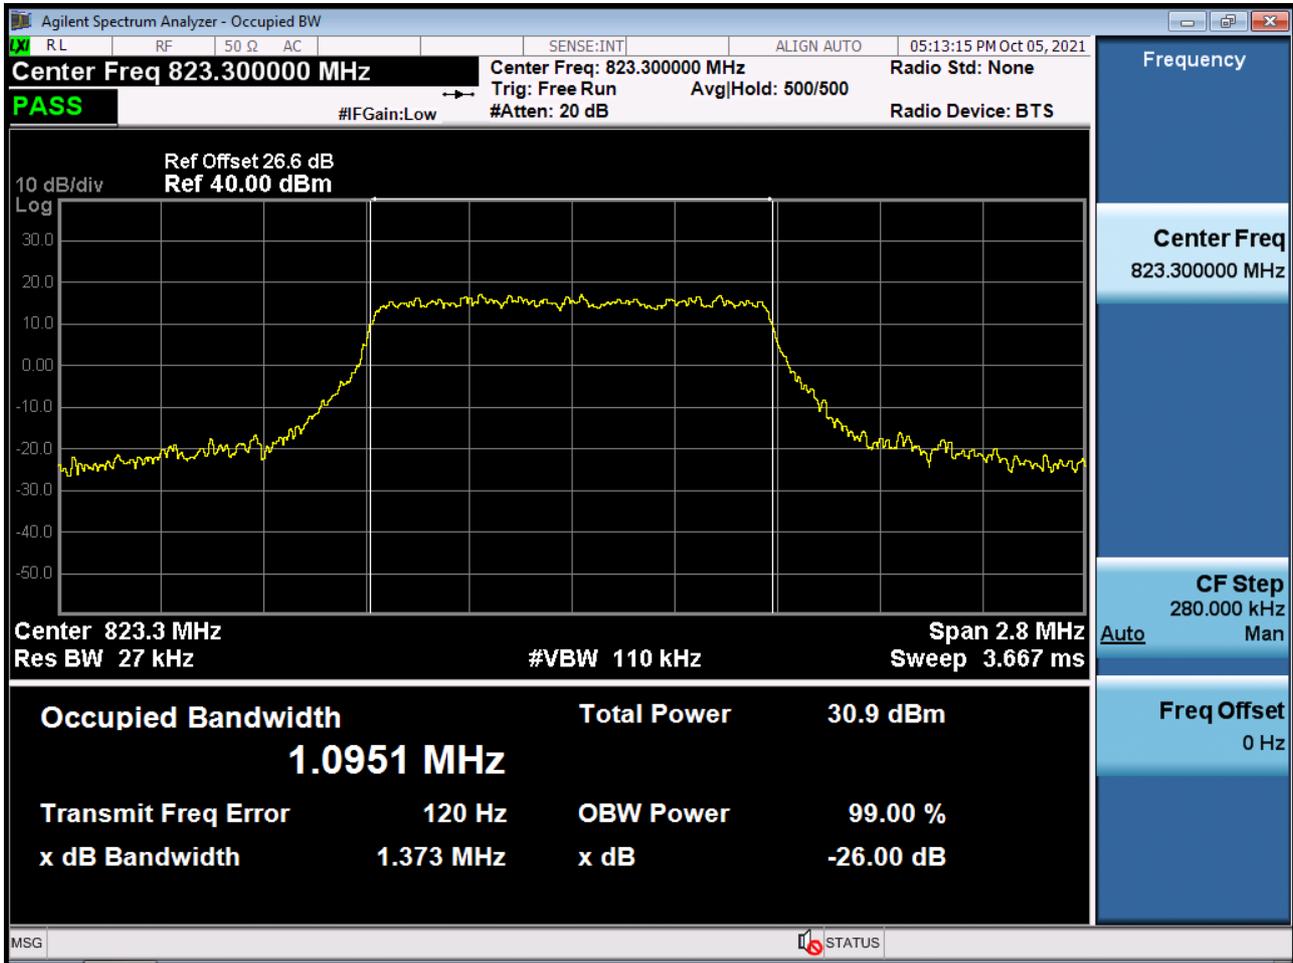


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 64QAM RB 6\_0)

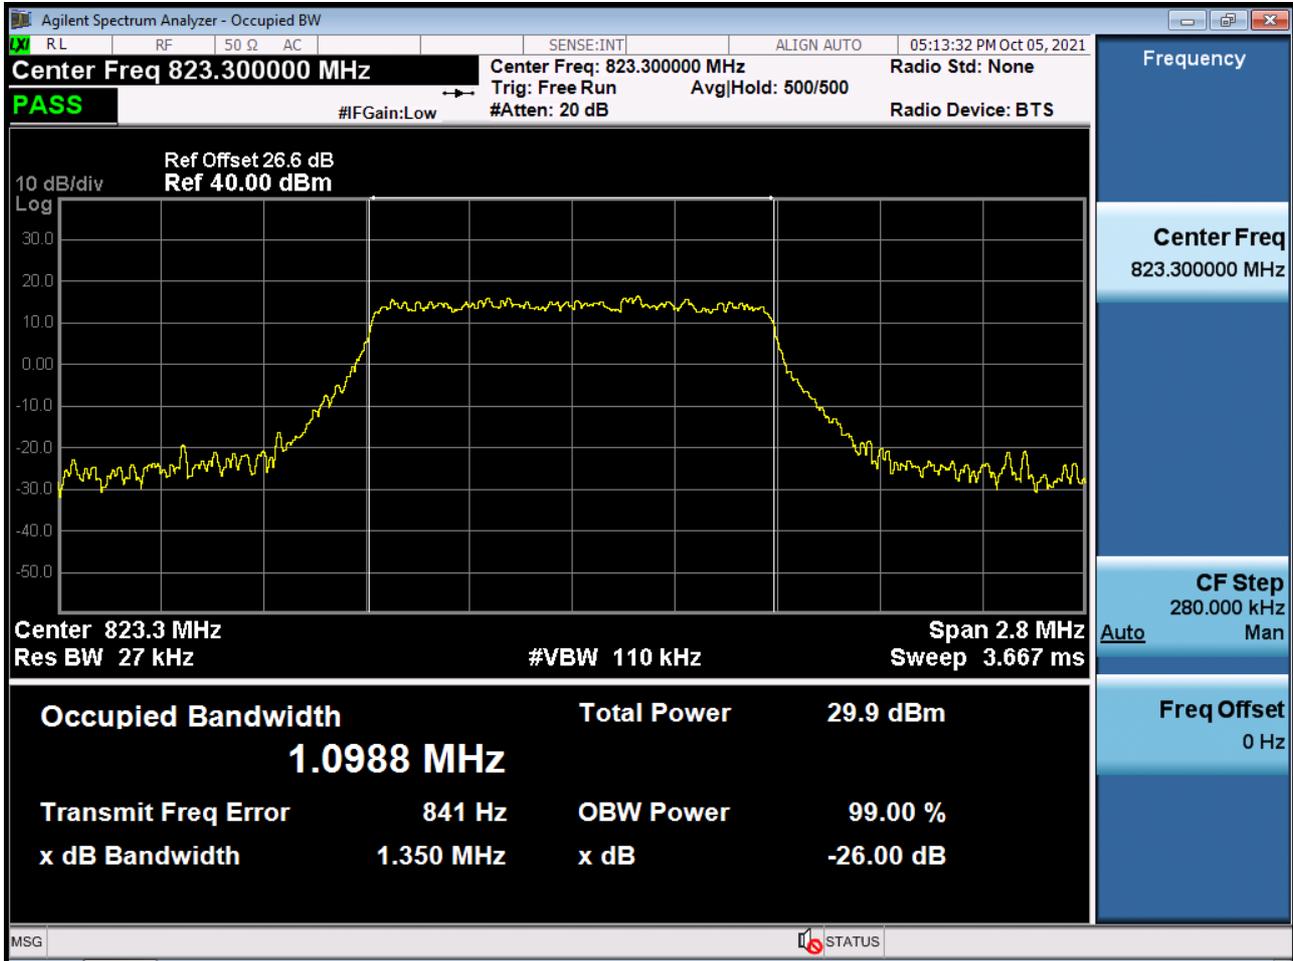


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 256QAM RB 6\_0)

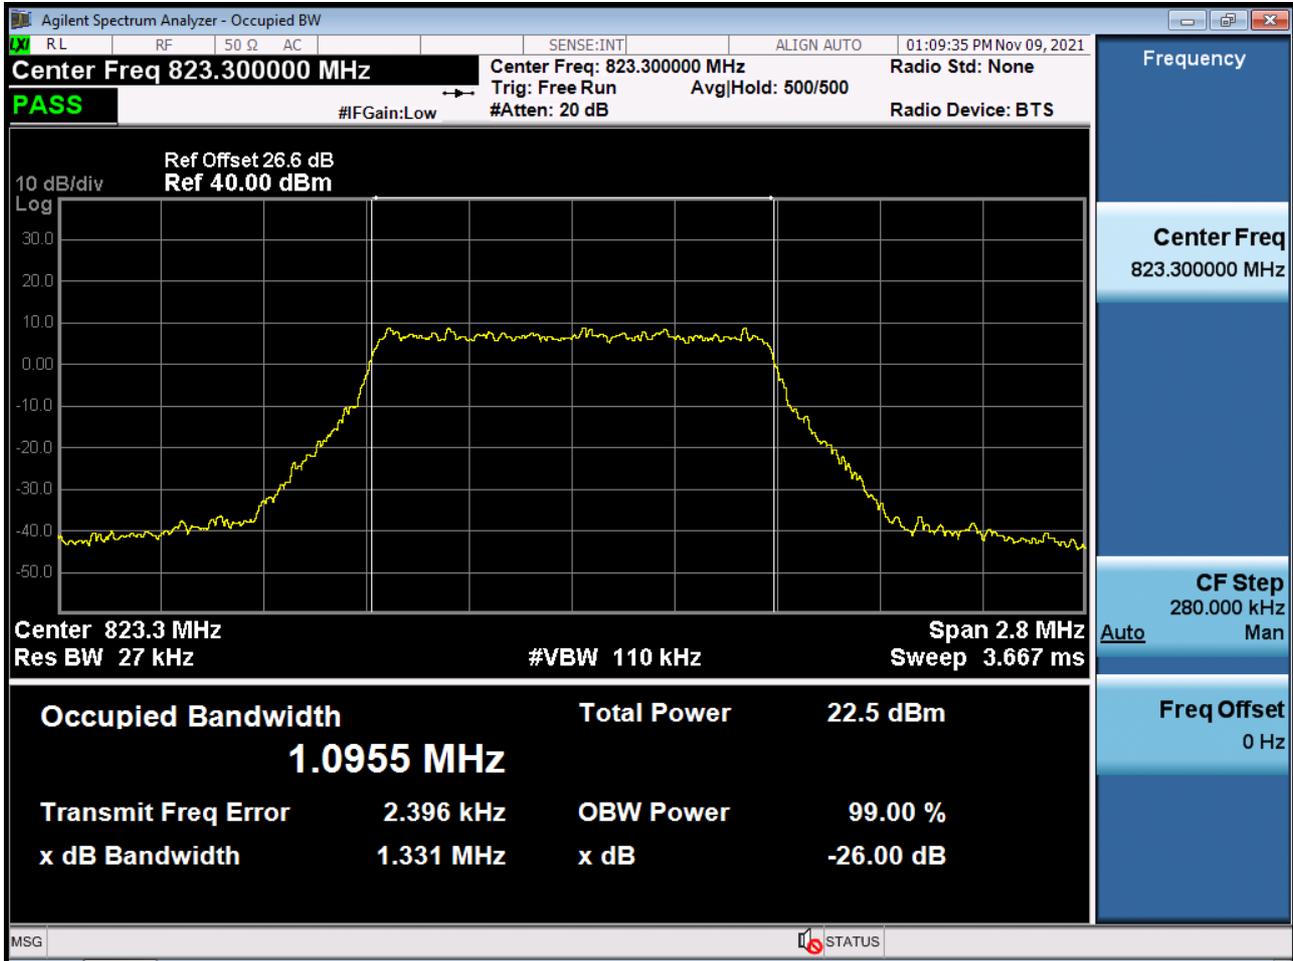


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 QPSK RB 15\_0)

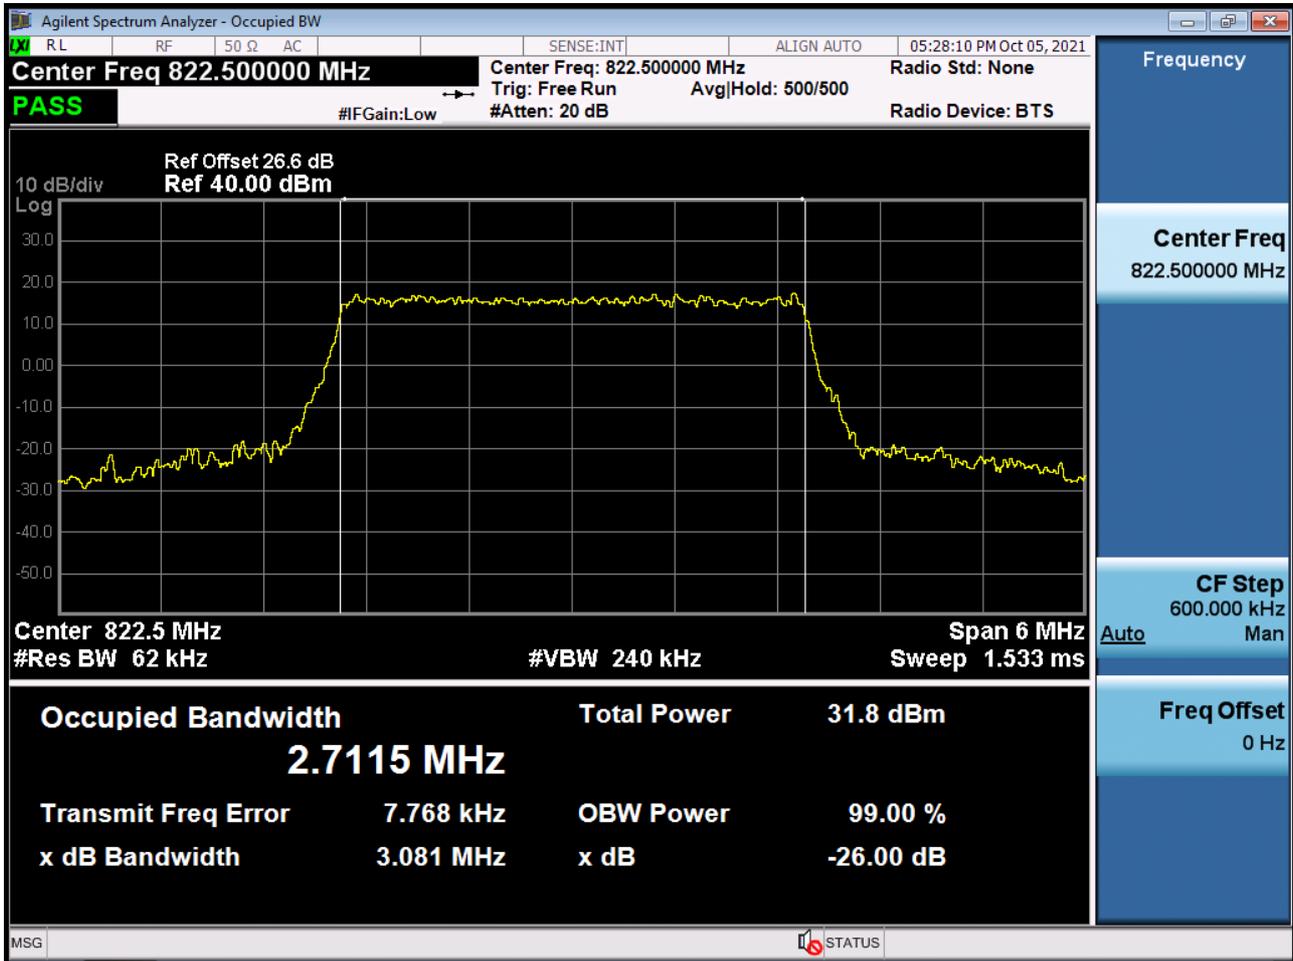


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 16QAM RB 15\_0)

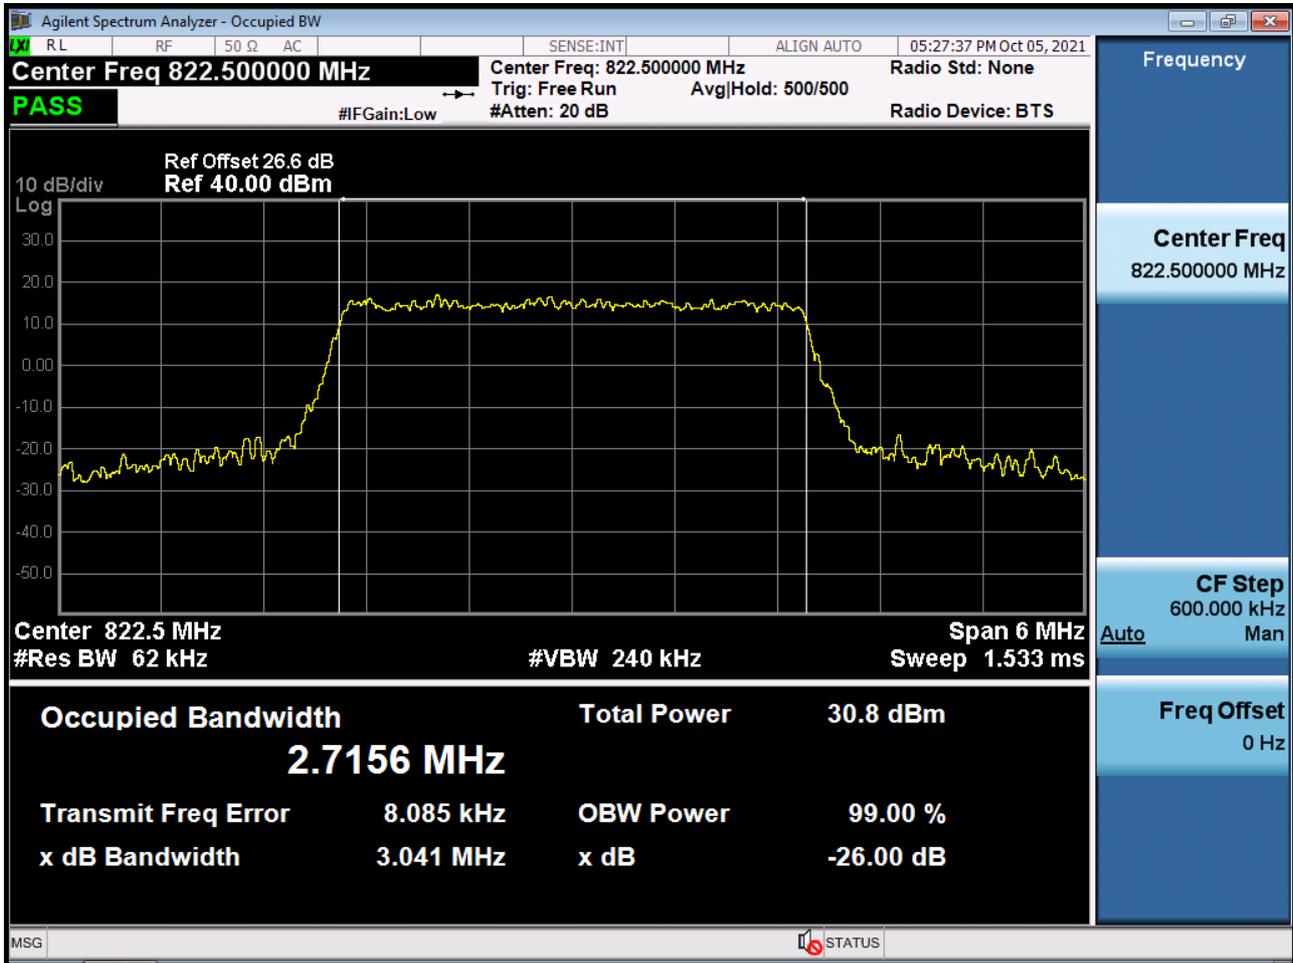


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 64QAM RB 15\_0)

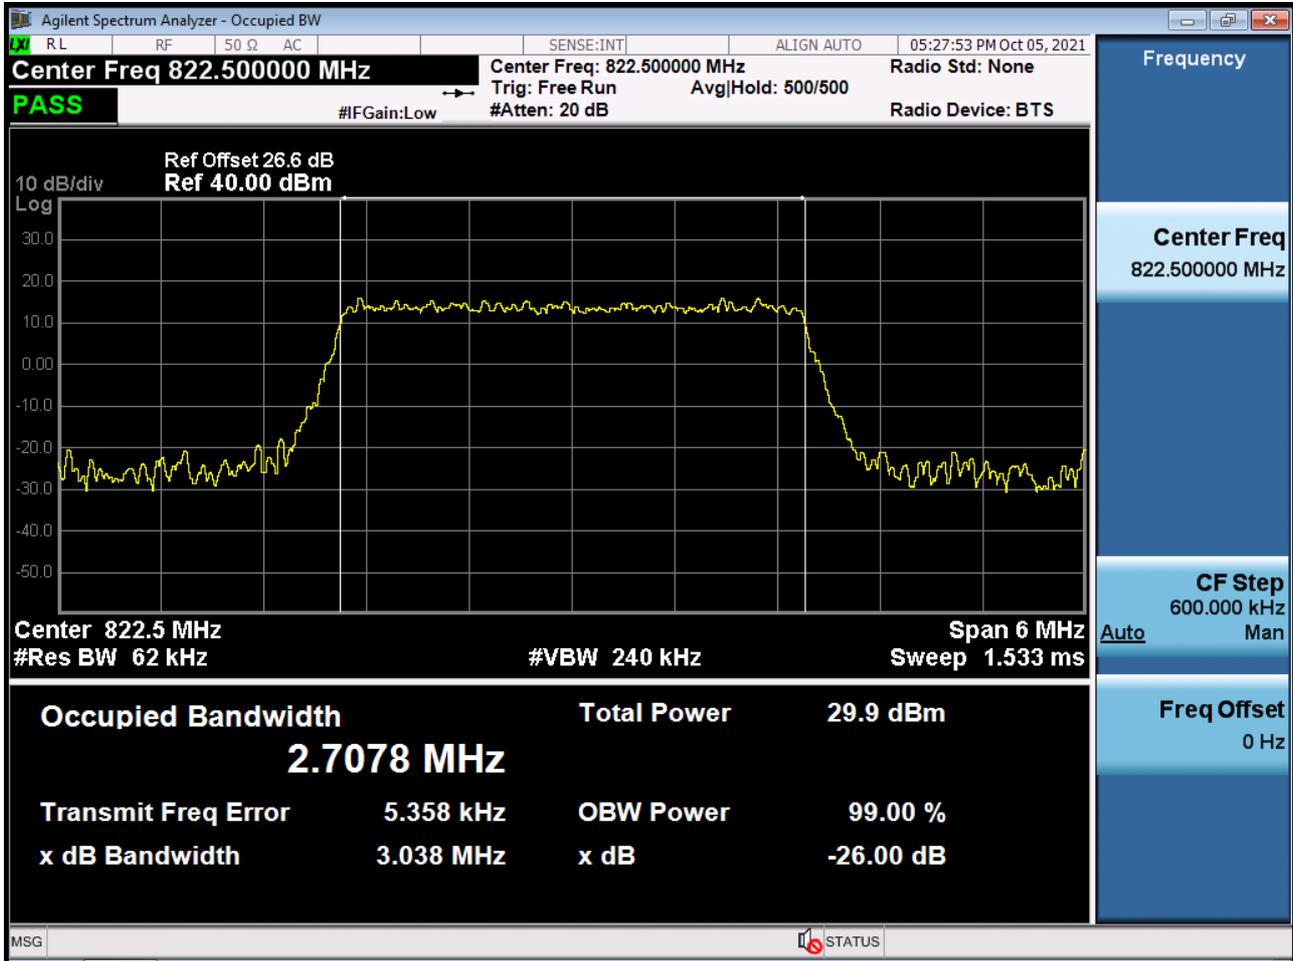


BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 256QAM RB 15\_0)

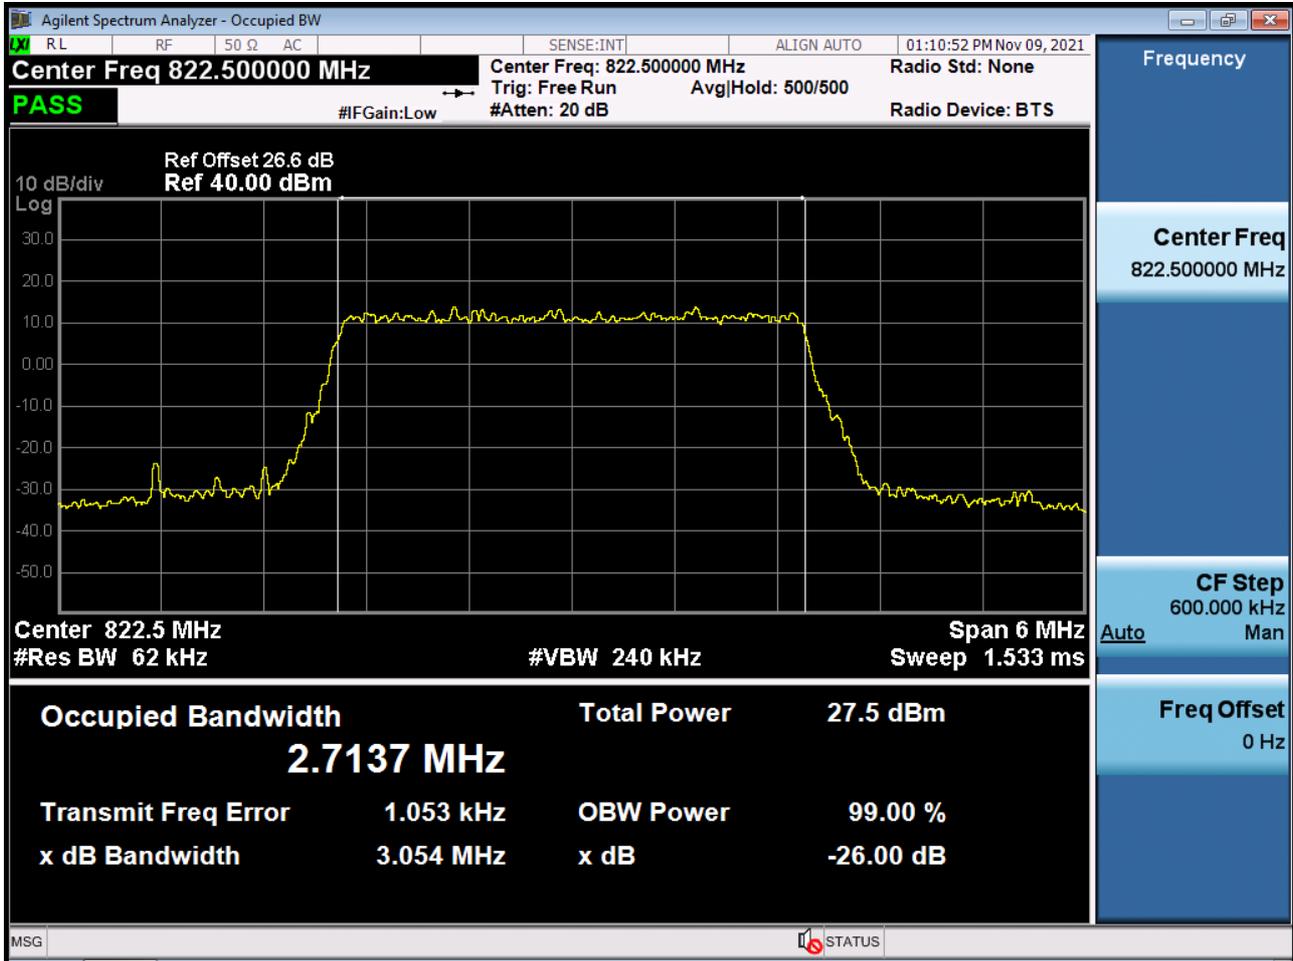


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 QPSK RB 25\_0)

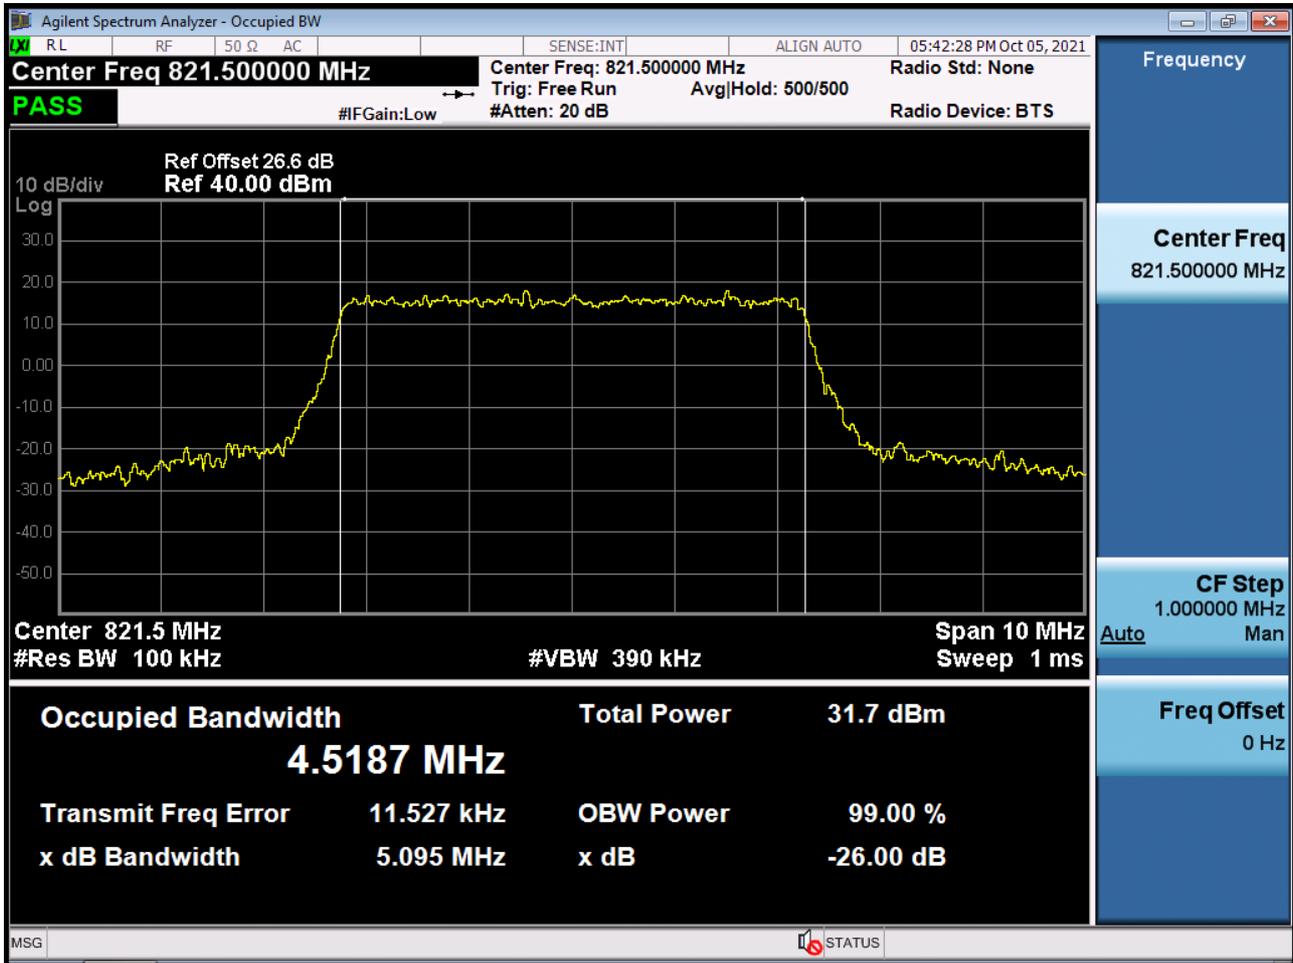


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 16QAM RB 25\_0)

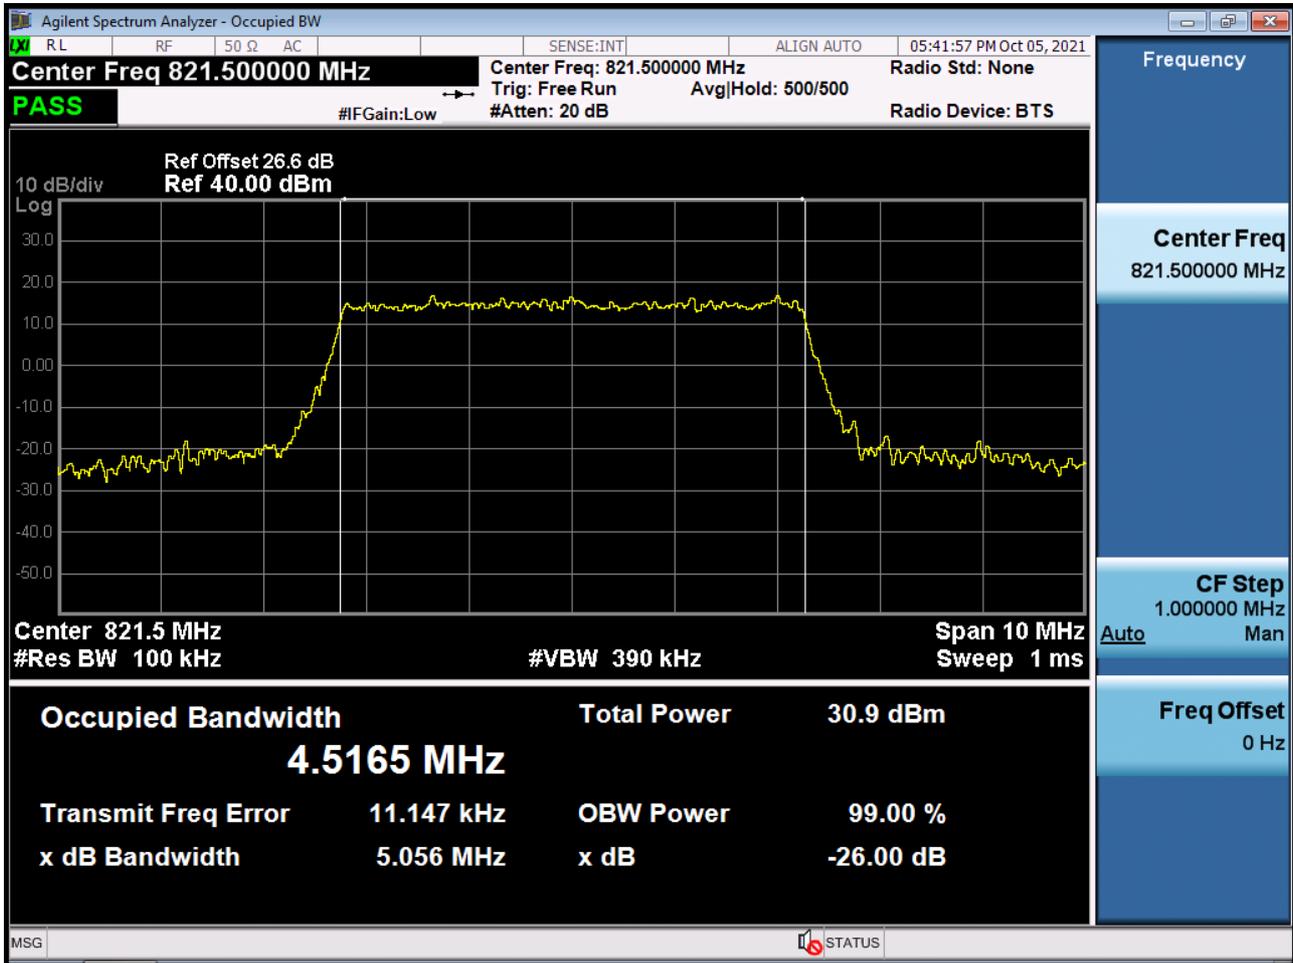


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 64QAM RB 25\_0)

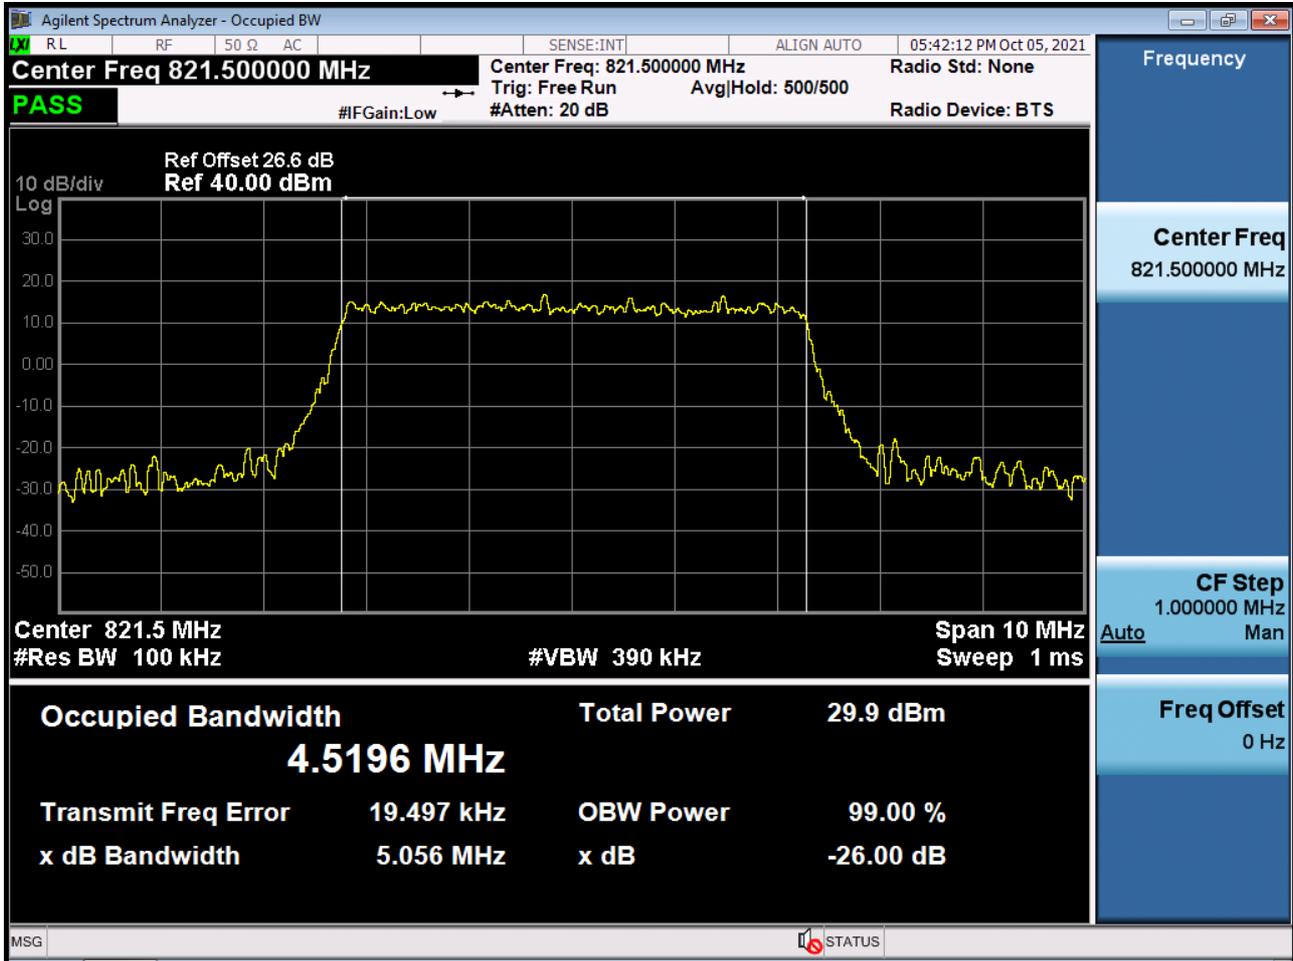


BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 256QAM RB 25\_0)

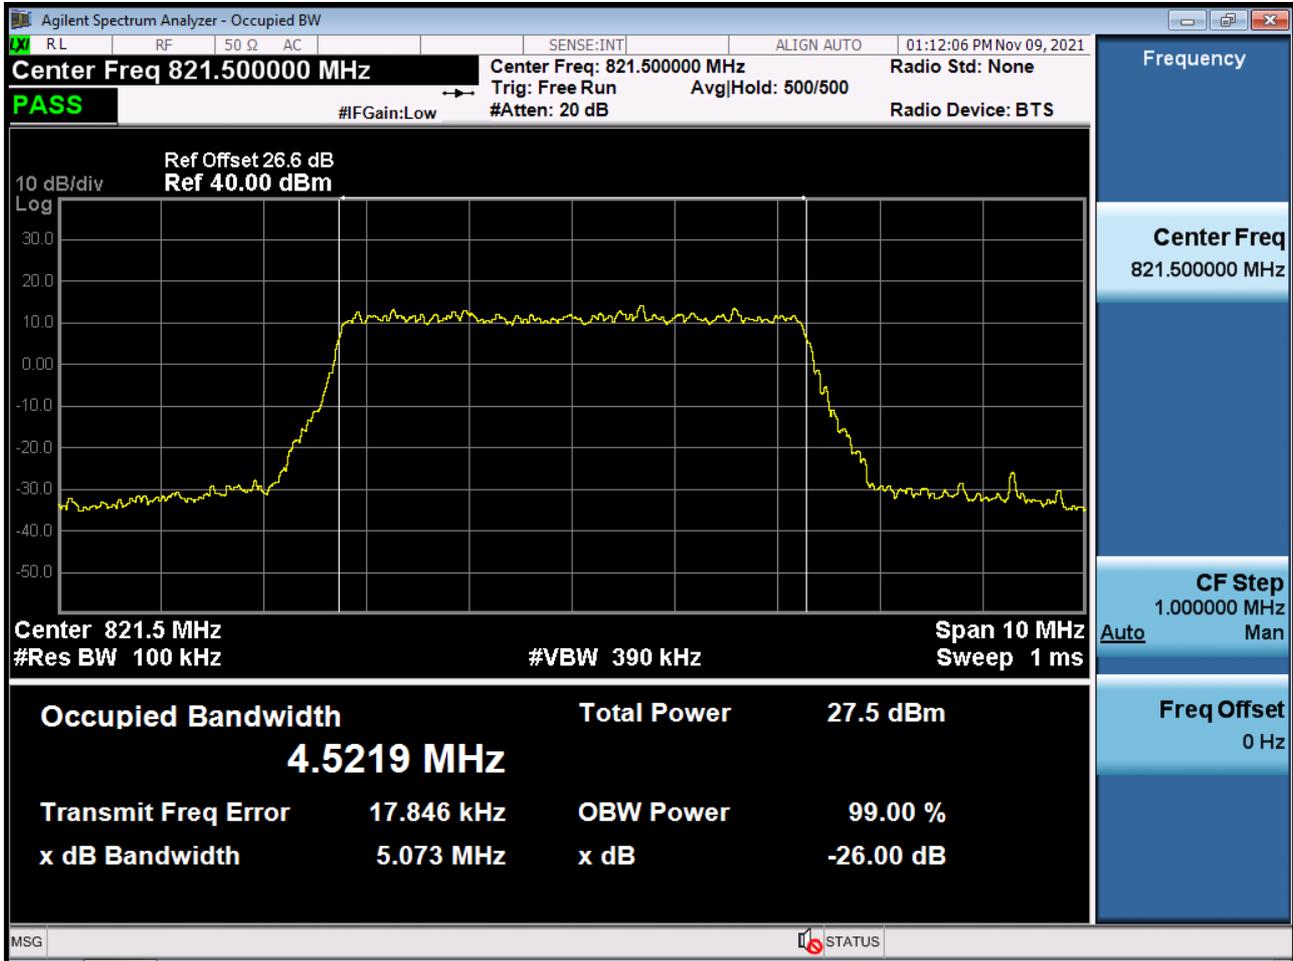


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 QPSK RB 50\_0)

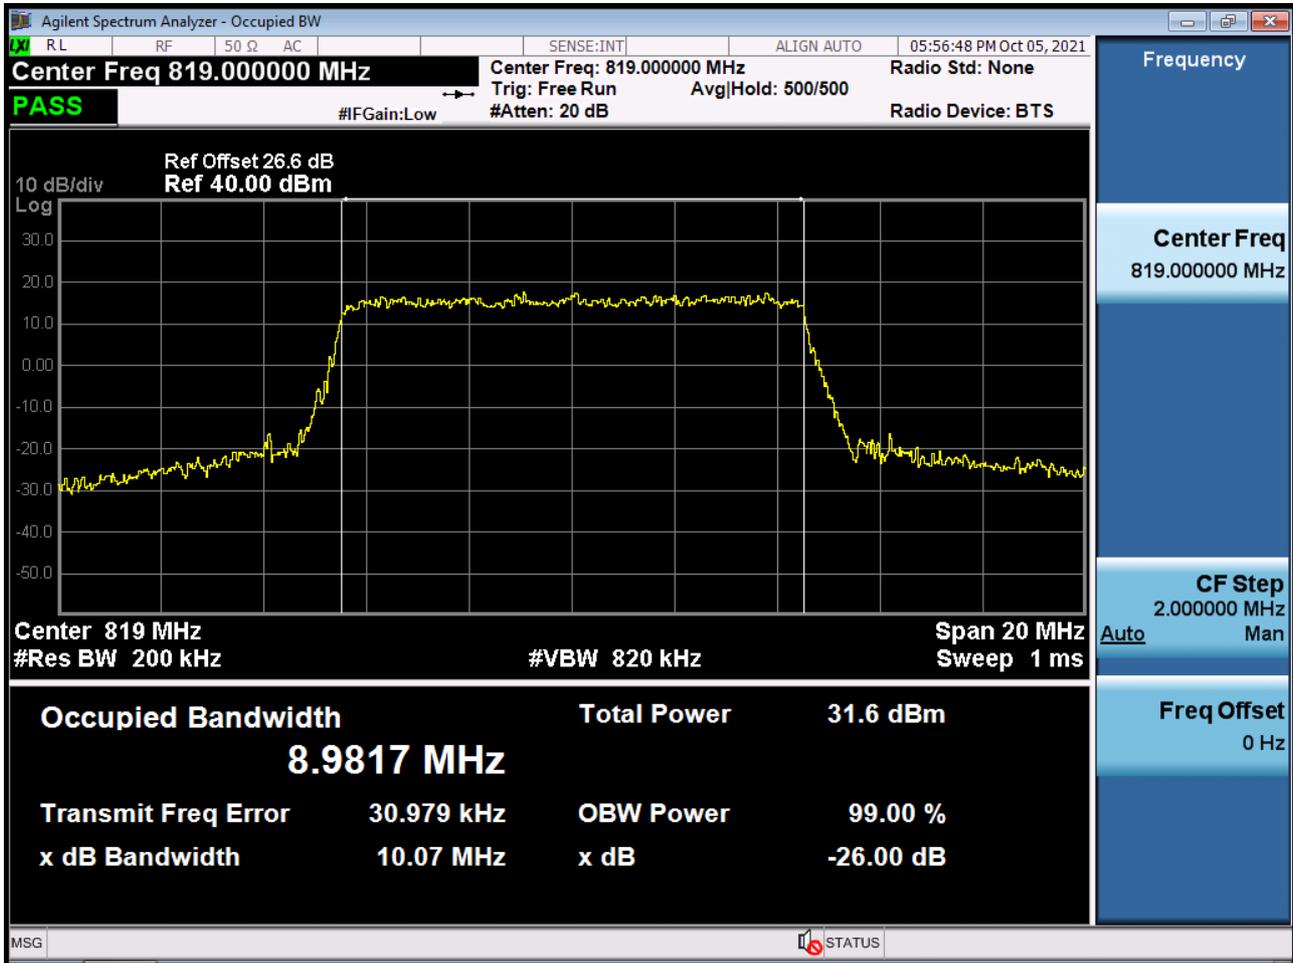


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 16QAM RB 50\_0)

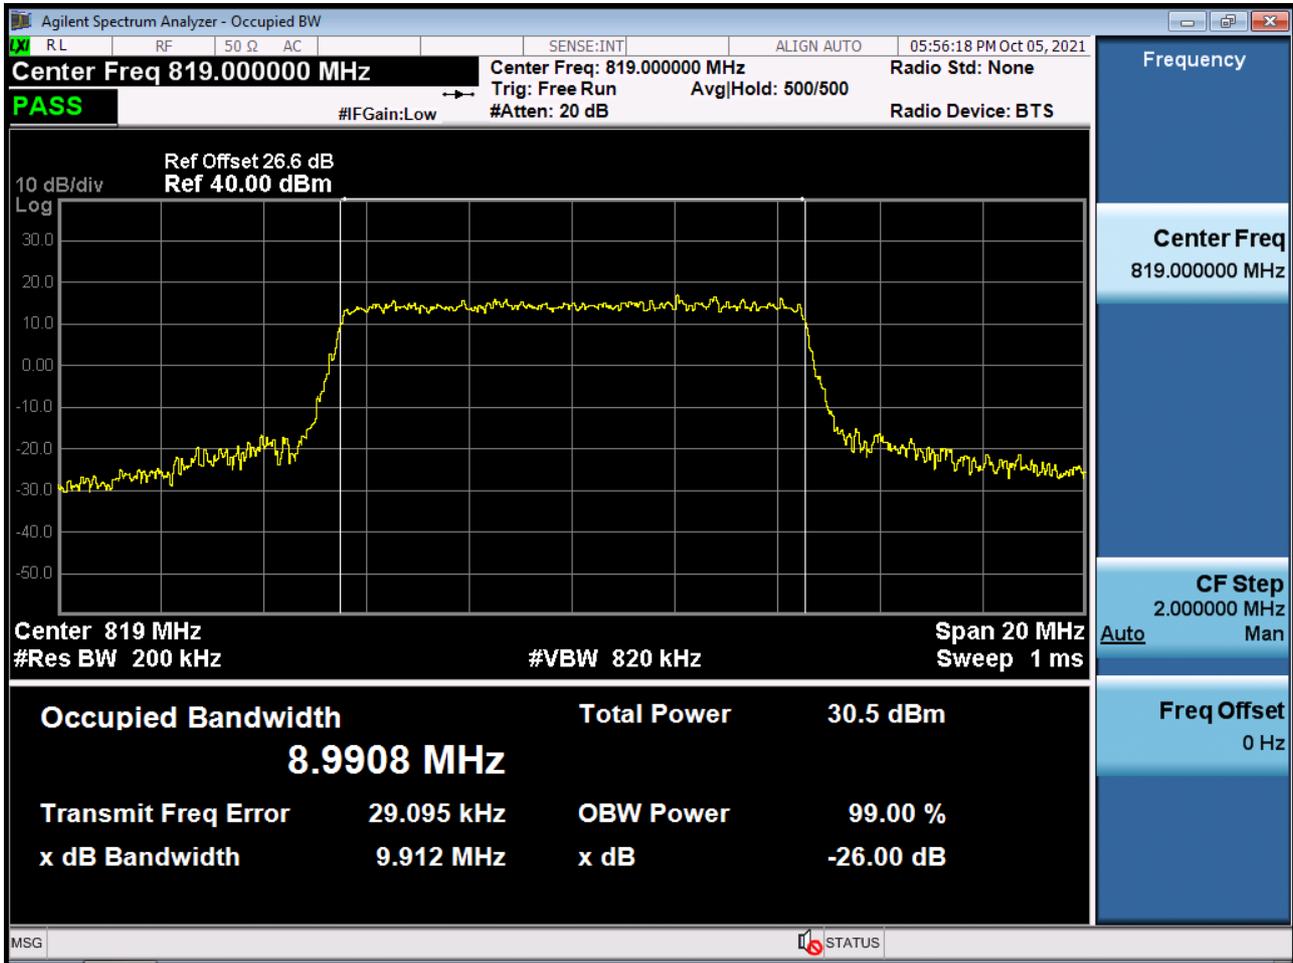


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 64QAM RB 50\_0)

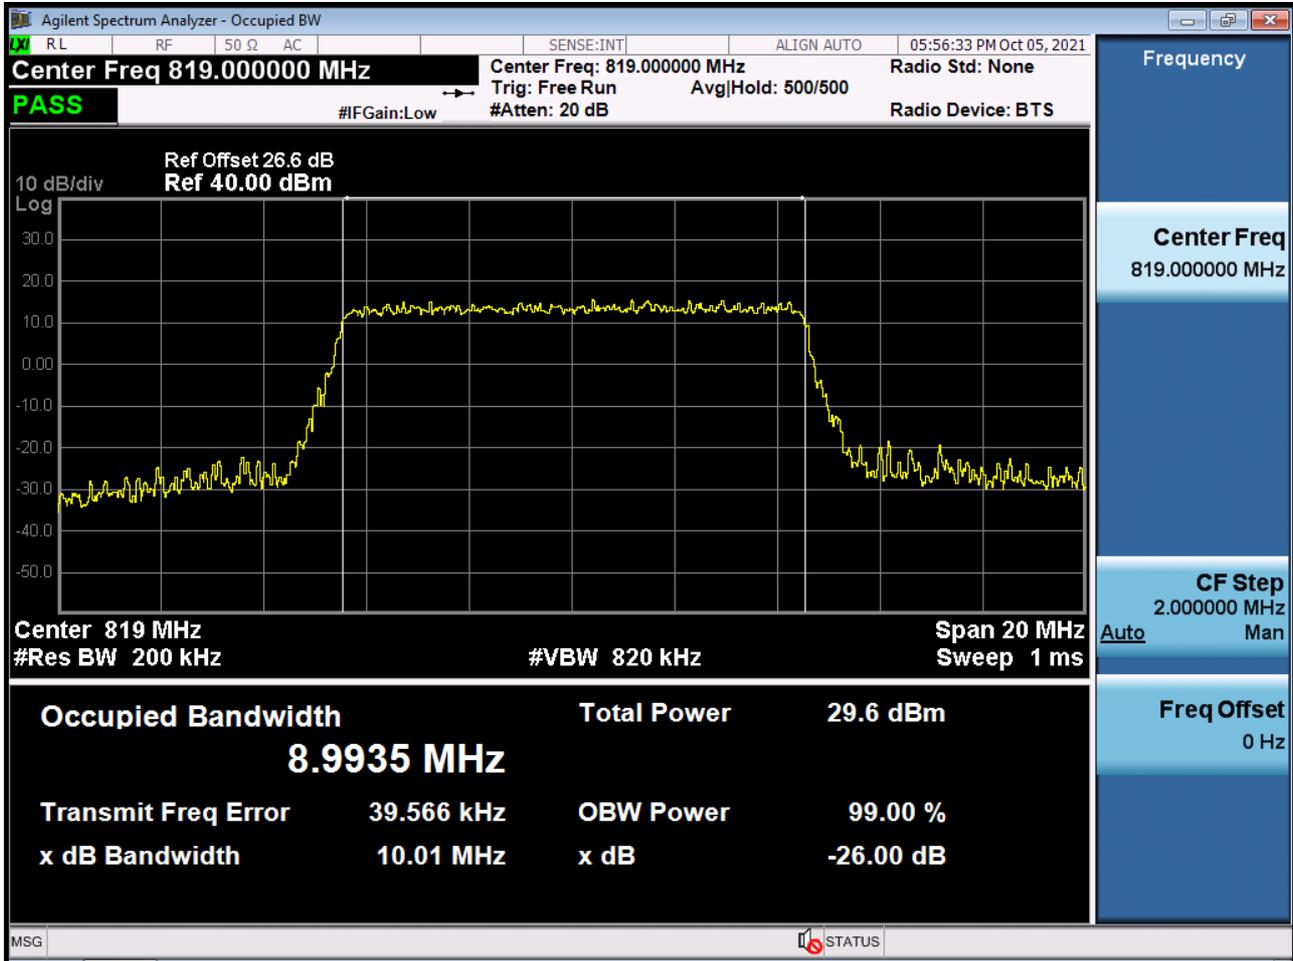


BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 256QAM RB 50\_0)

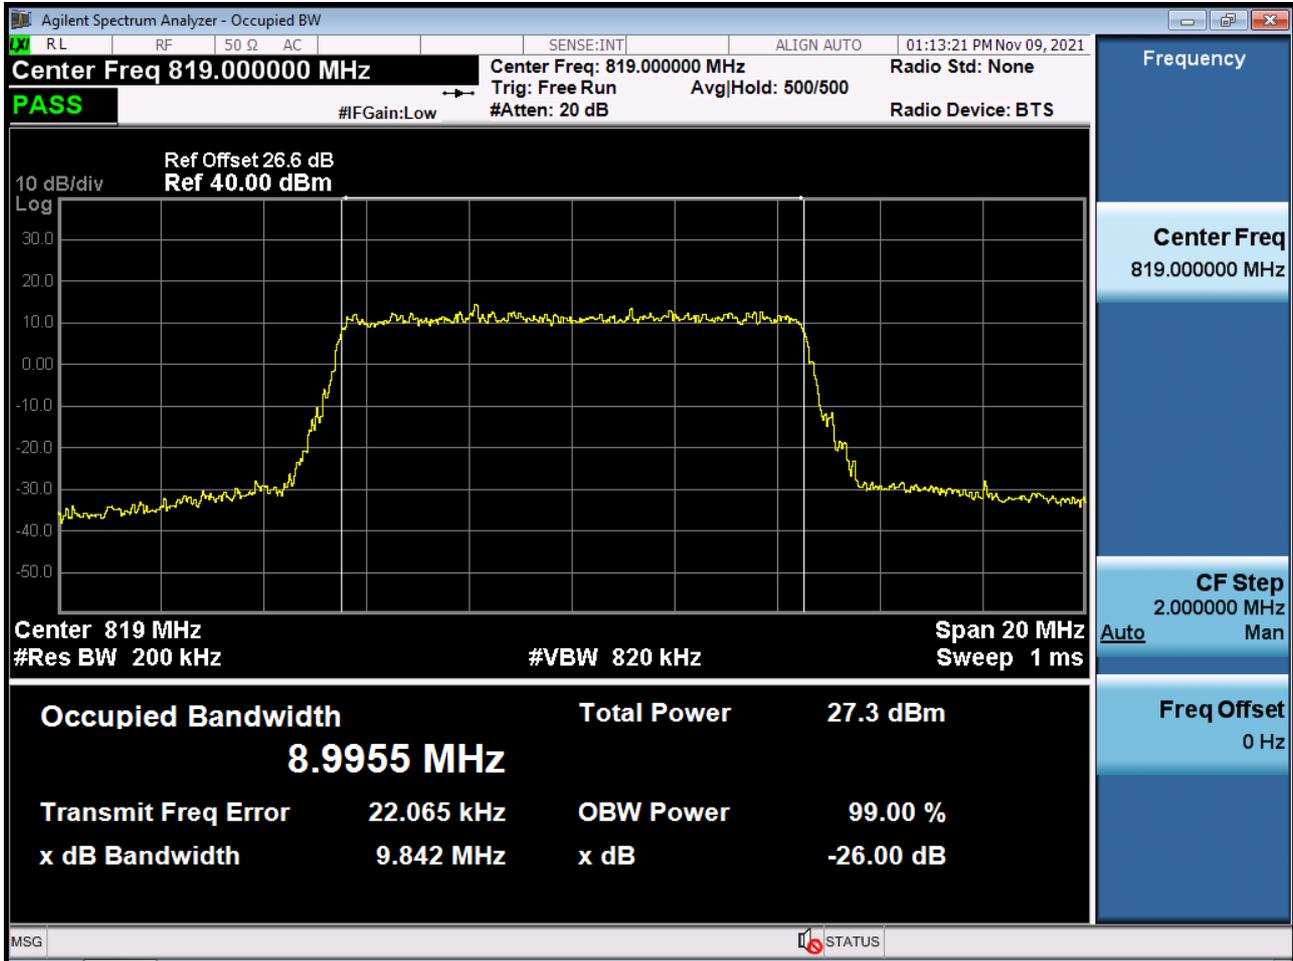


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 QPSK RB 75\_0)

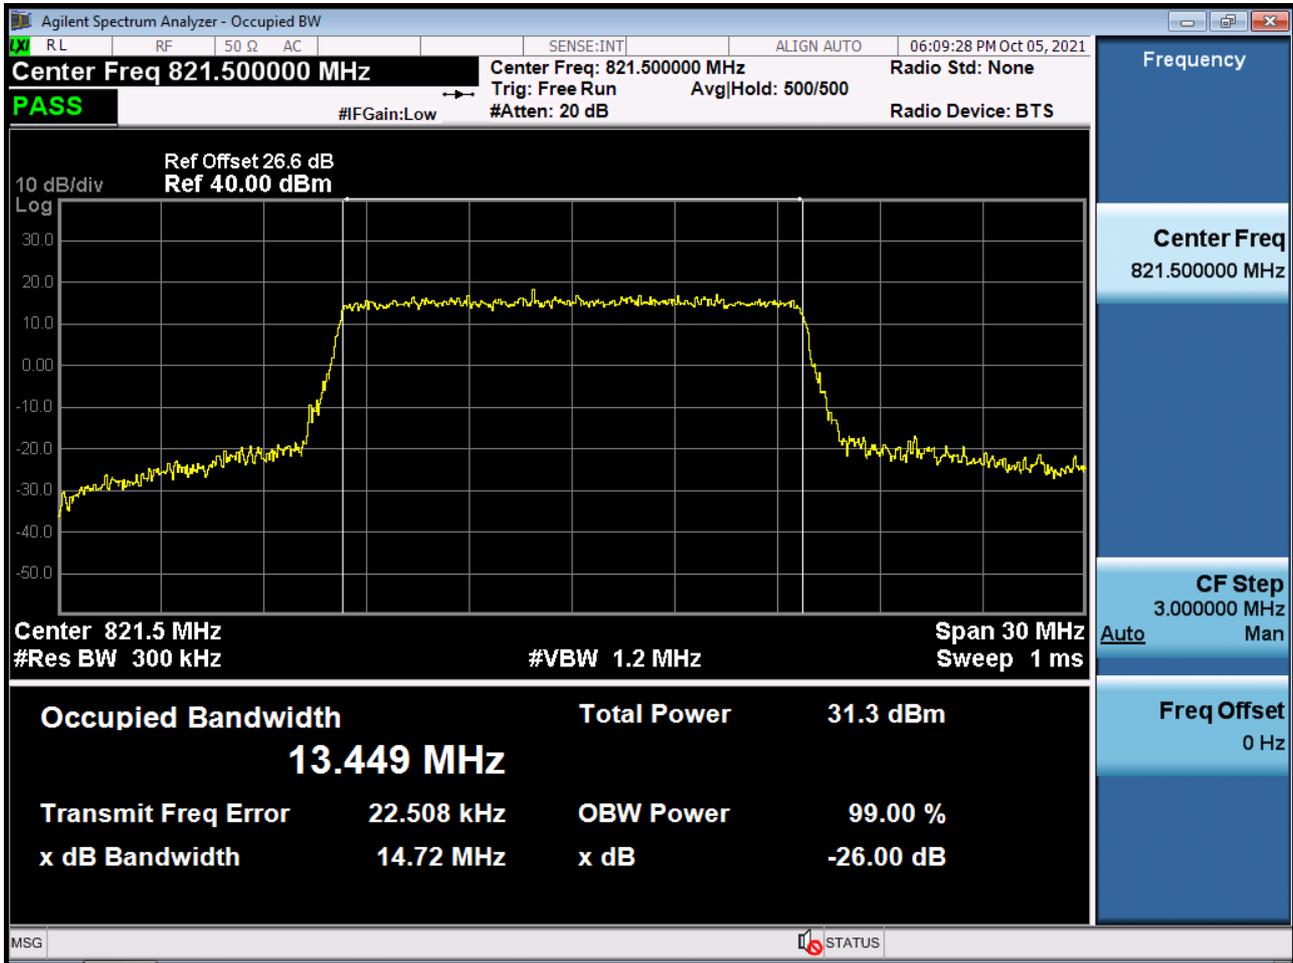


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 16QAM RB 75\_0)

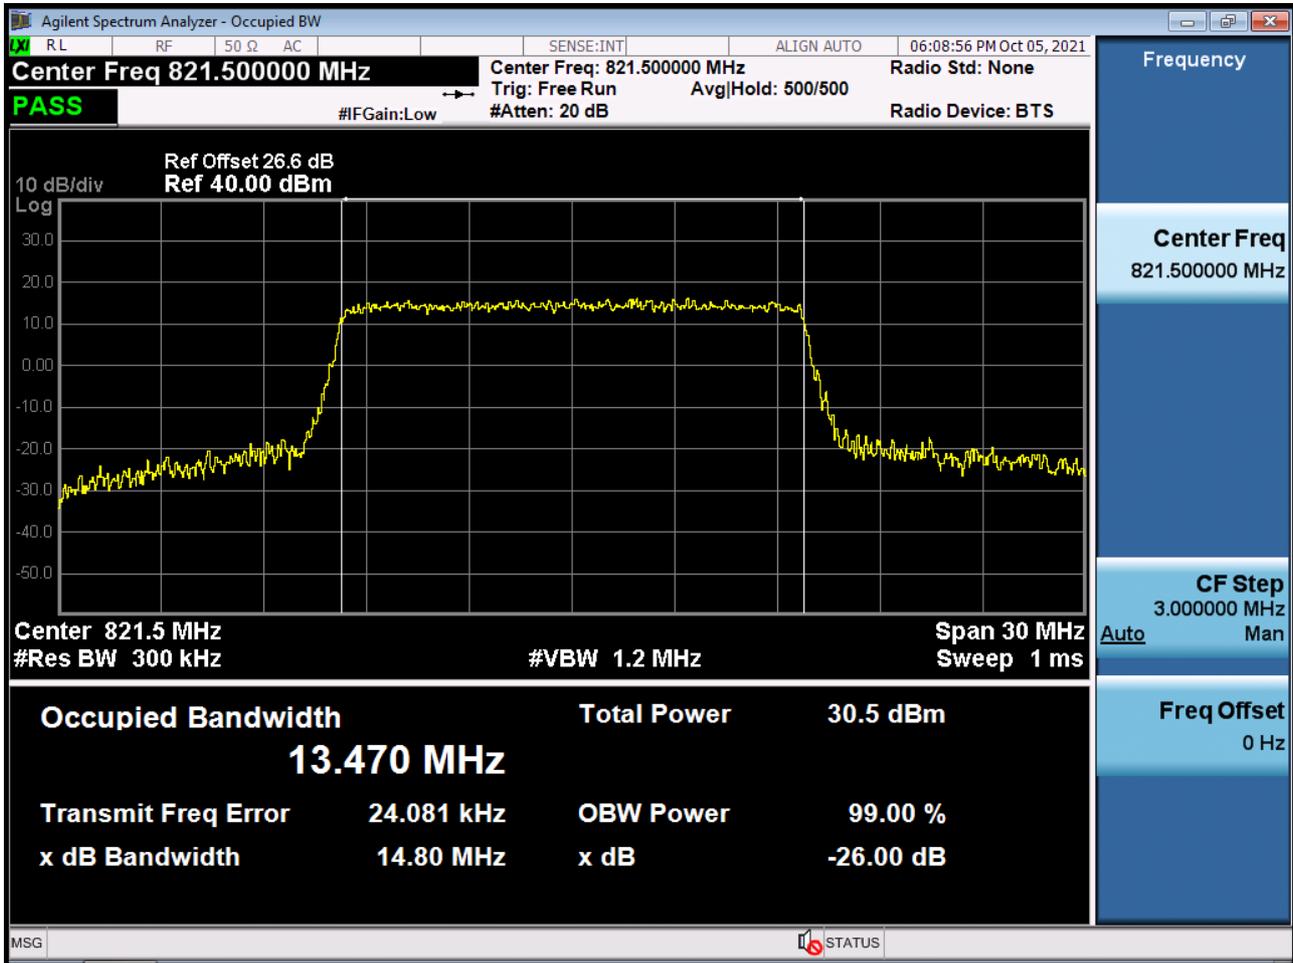


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 64QAM RB 75\_0)

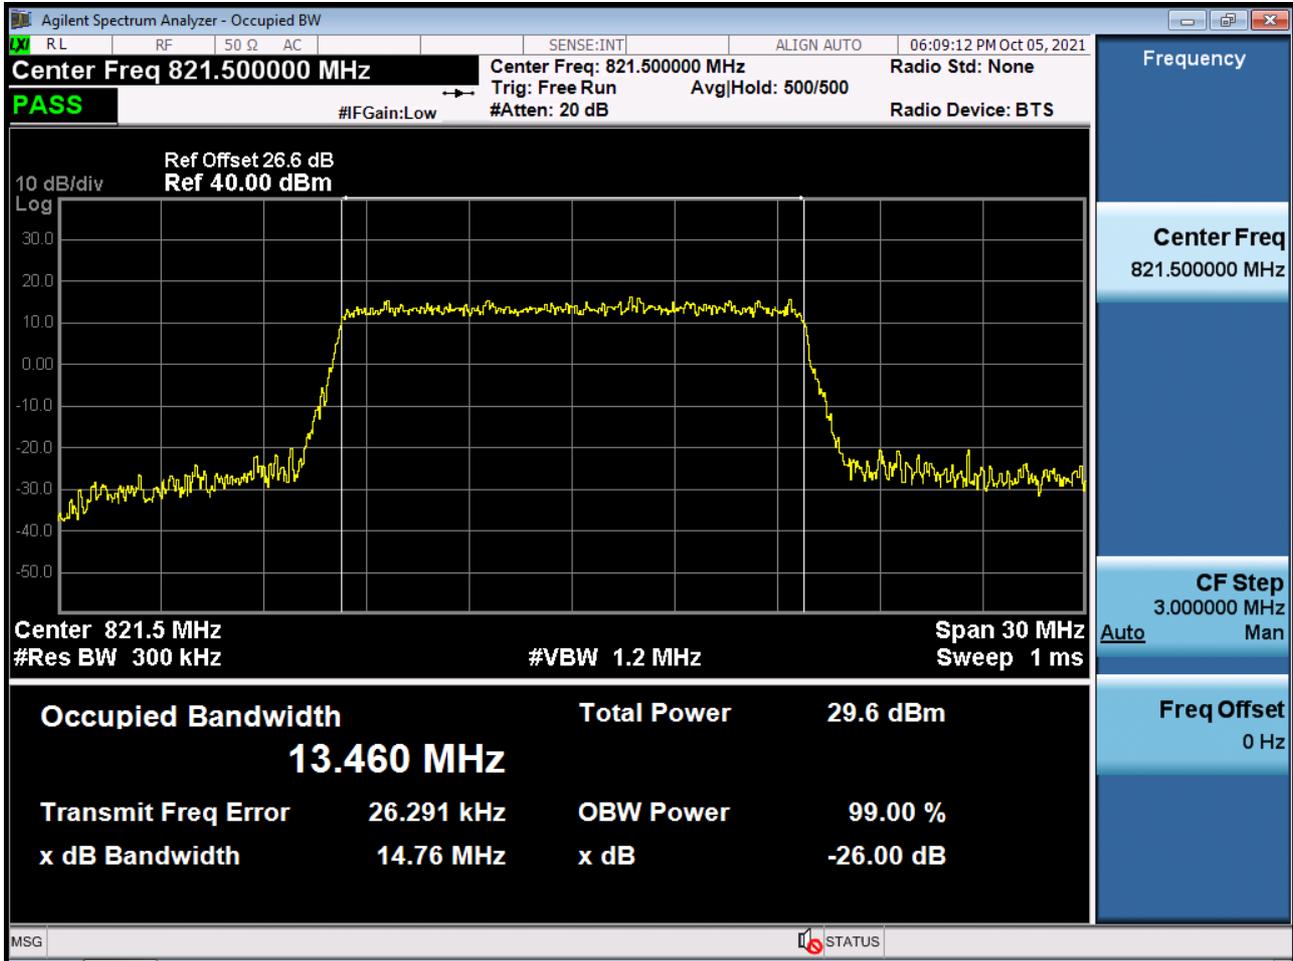


BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 256QAM RB 75\_0)

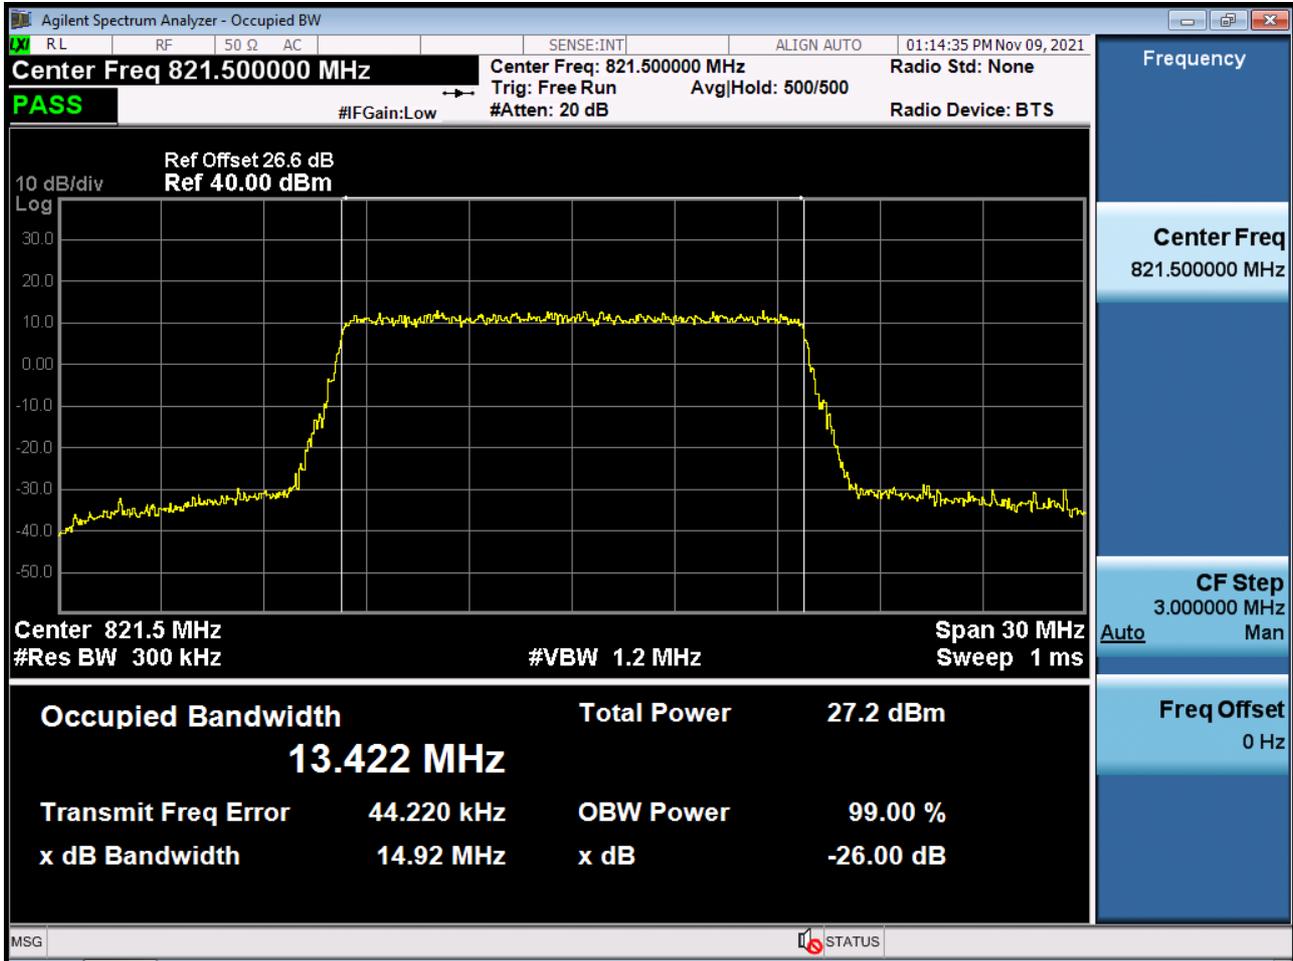


BAND 26. Lower Channel Edge Plot (1.4 M BW Ch.26697 QPSK RB 1, Offset 0)

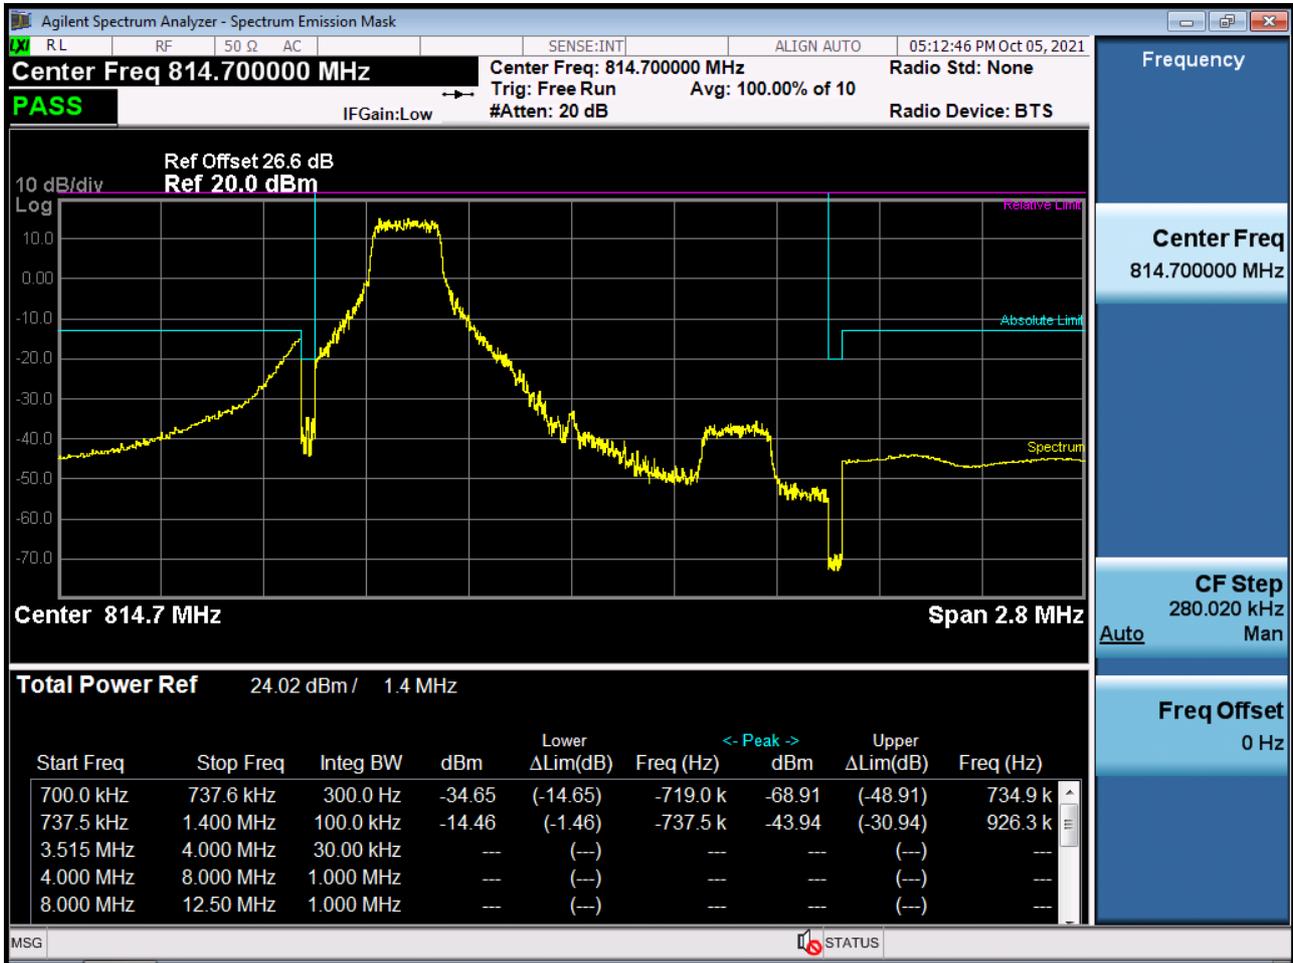

BAND 26. Lower Channel Edge Plot (1.4 M BW Ch.26697 QPSK\_RB6\_Offset 0)

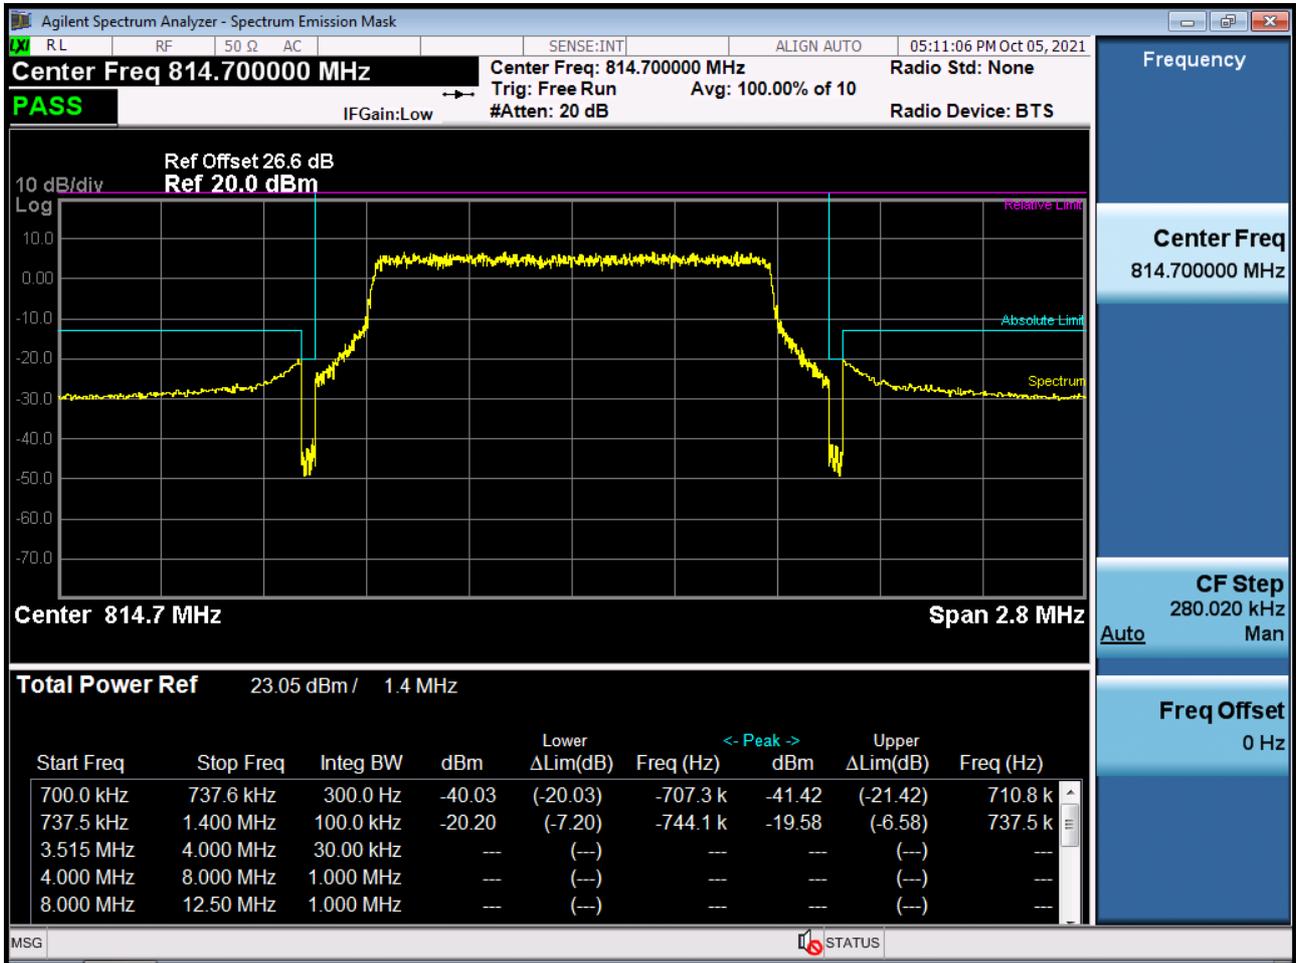


BAND 26. Lower Channel Edge Plot (3 M BW Ch.26705 QPSK RB 1, Offset 0)

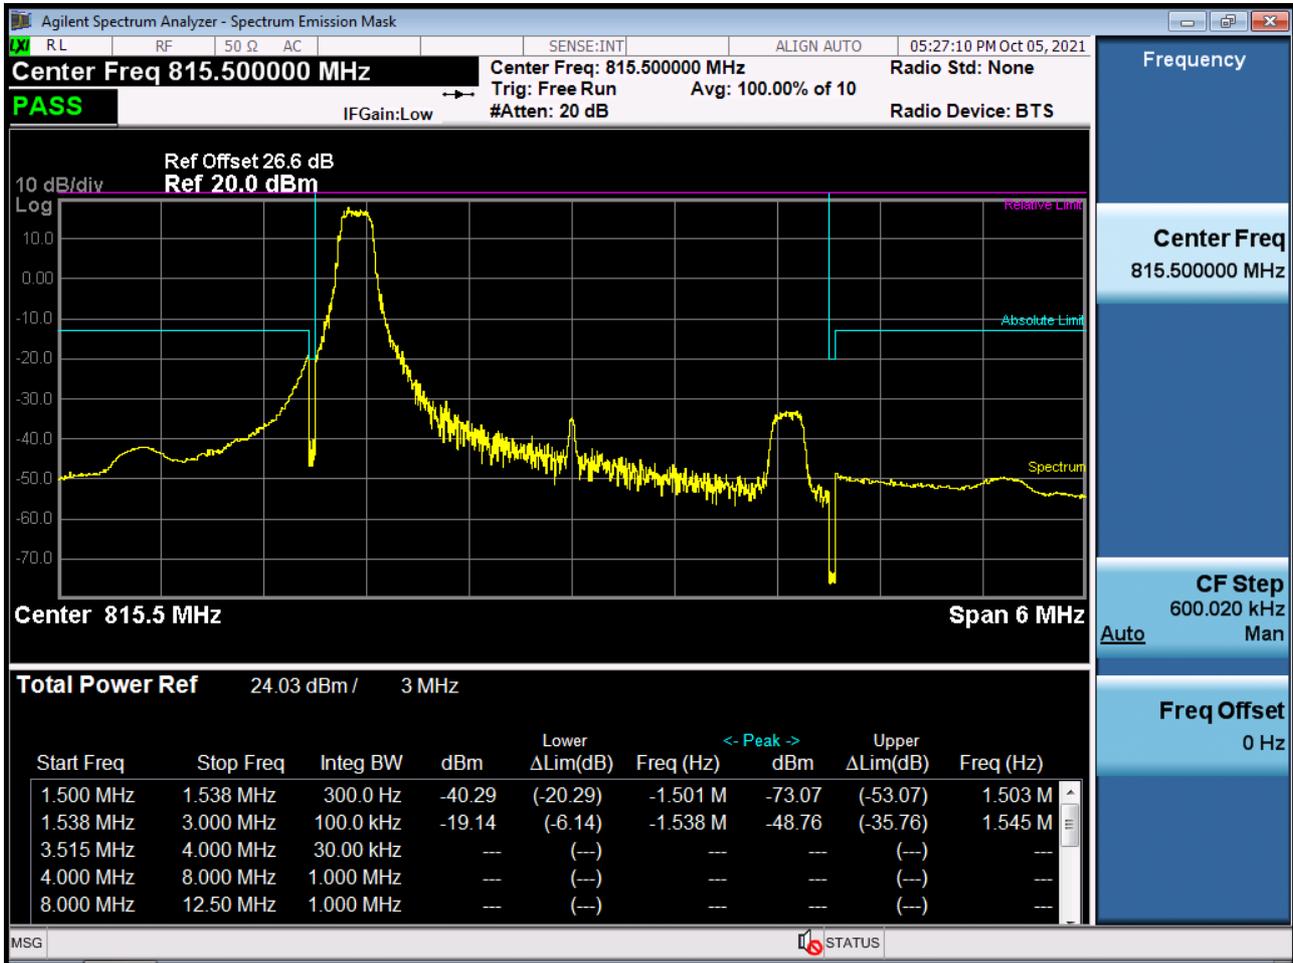


BAND 26. Lower Channel Edge Plot (3 M BW Ch.26705 QPSK\_RB15\_Offset 0)




BAND 26. Lower Channel Edge Plot (5 M BW Ch.26715 QPSK RB 1, Offset 0)

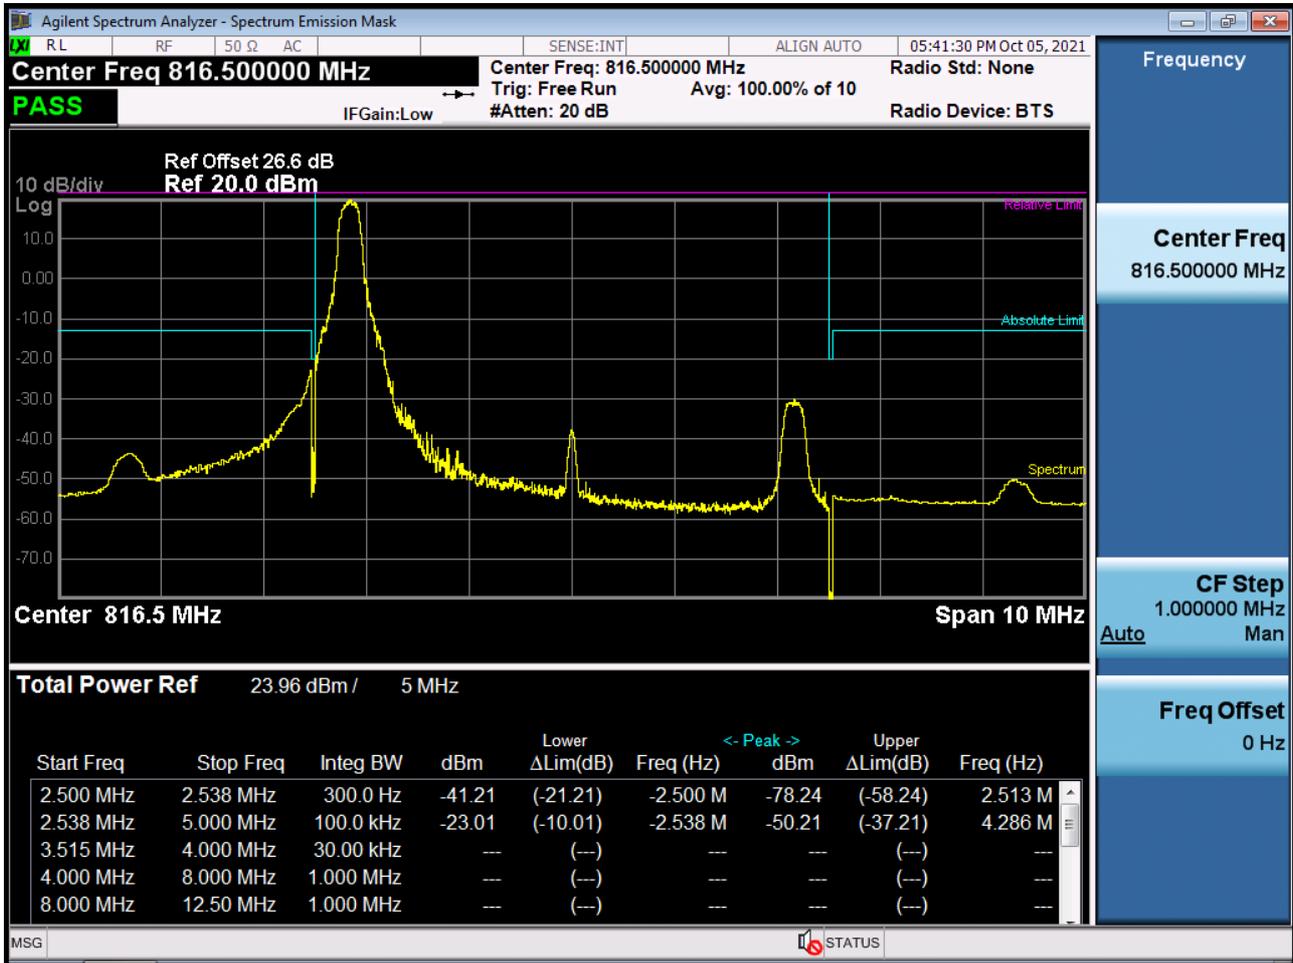

BAND 26. Lower Channel Edge Plot (5 M BW Ch.26715 QPSK\_RB25\_Offset 0)

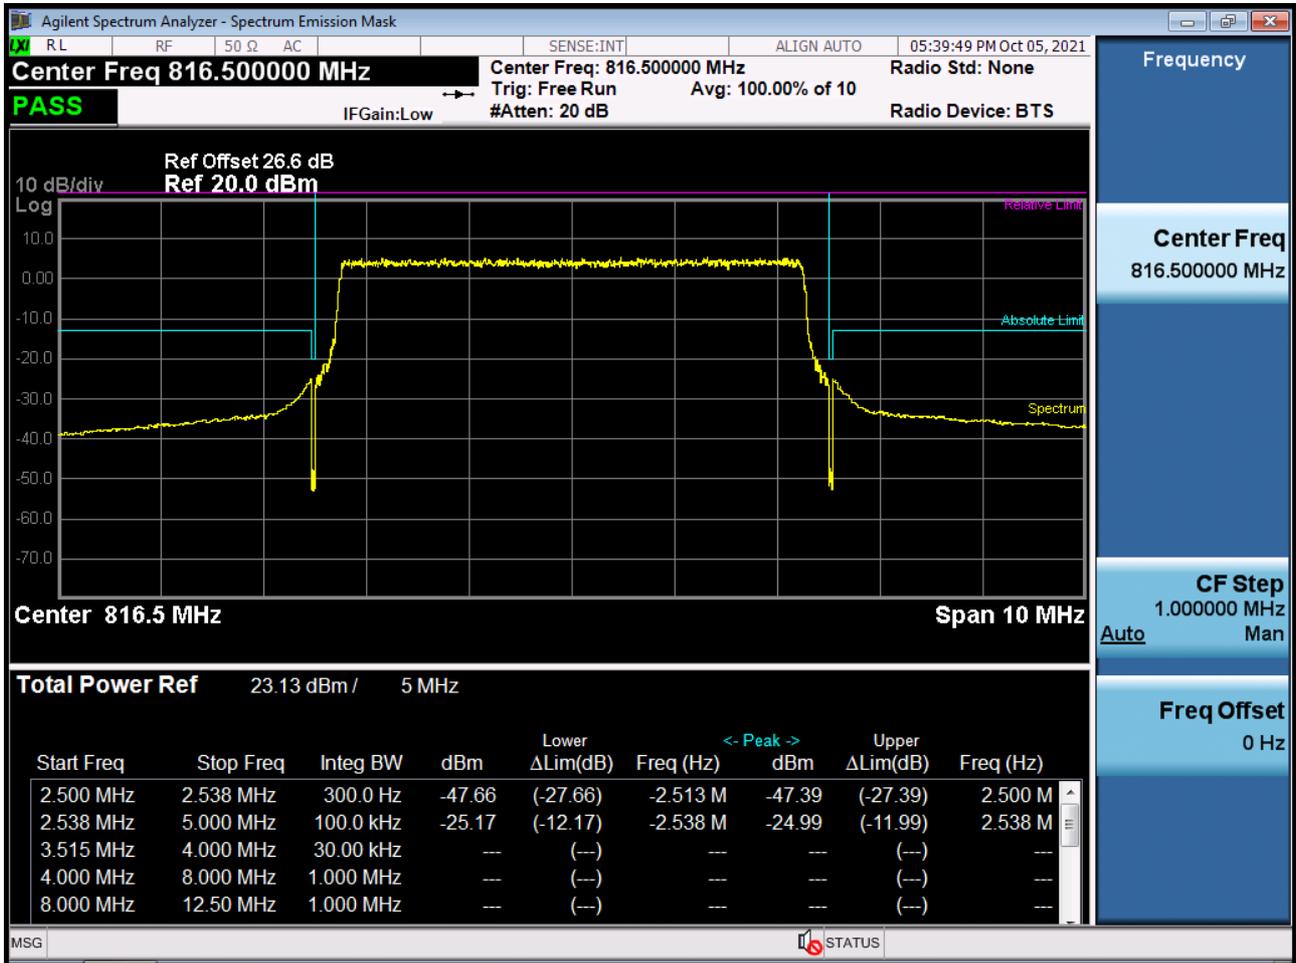


BAND 26. Low Channel Edge Plot (10 M BW Ch.26740 QPSK RB 1, Offset 0)

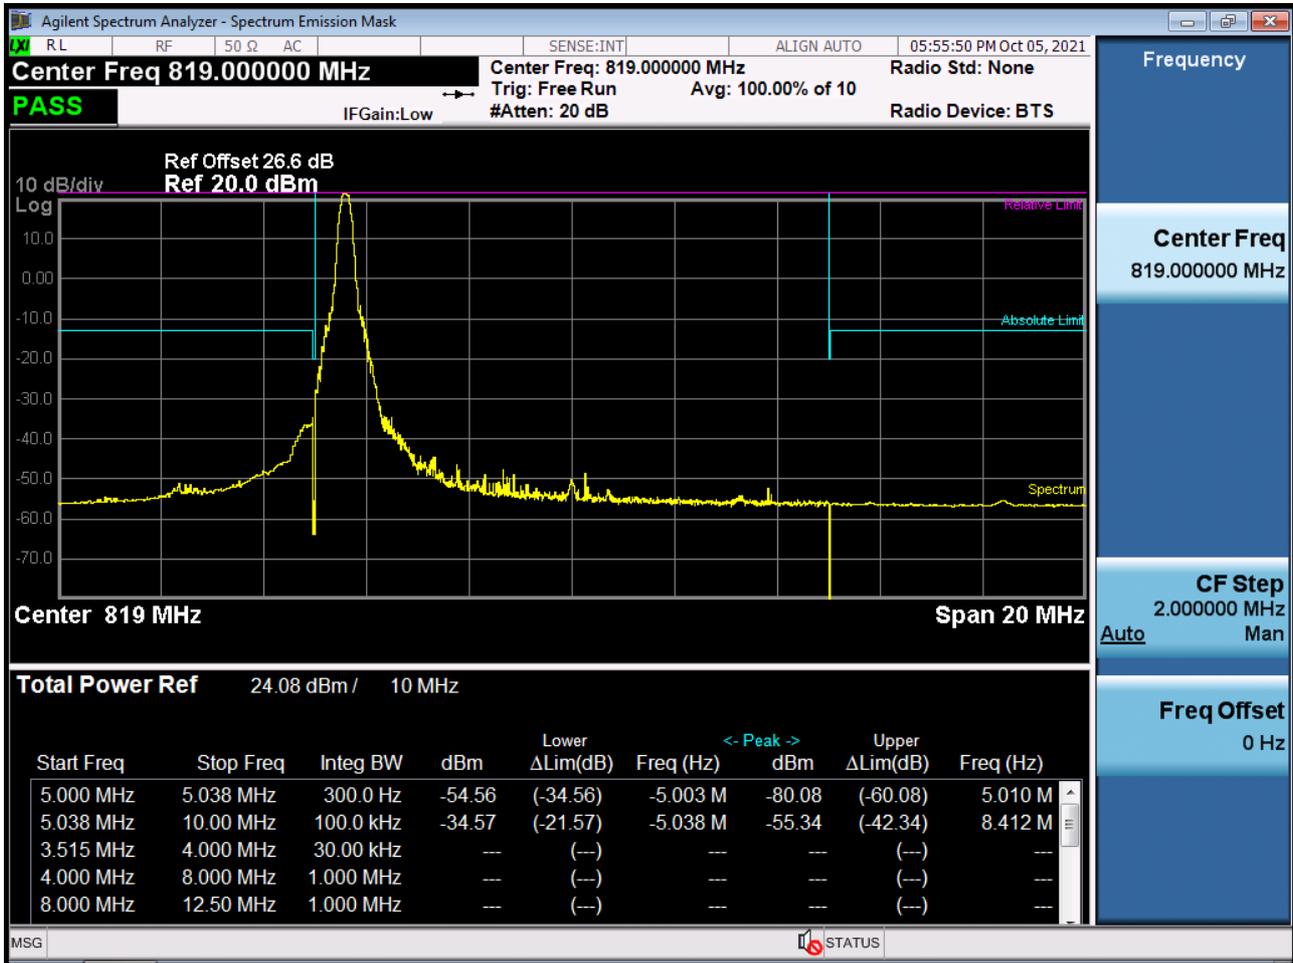


BAND 26. Low Channel Edge Plot (10 M BW Ch.26740 QPSK\_RB50\_Offset 0)



BAND 26. Mid Channel Edge Plot (10 M BW Ch. 26740 QPSK\_RB1\_Offset 49)

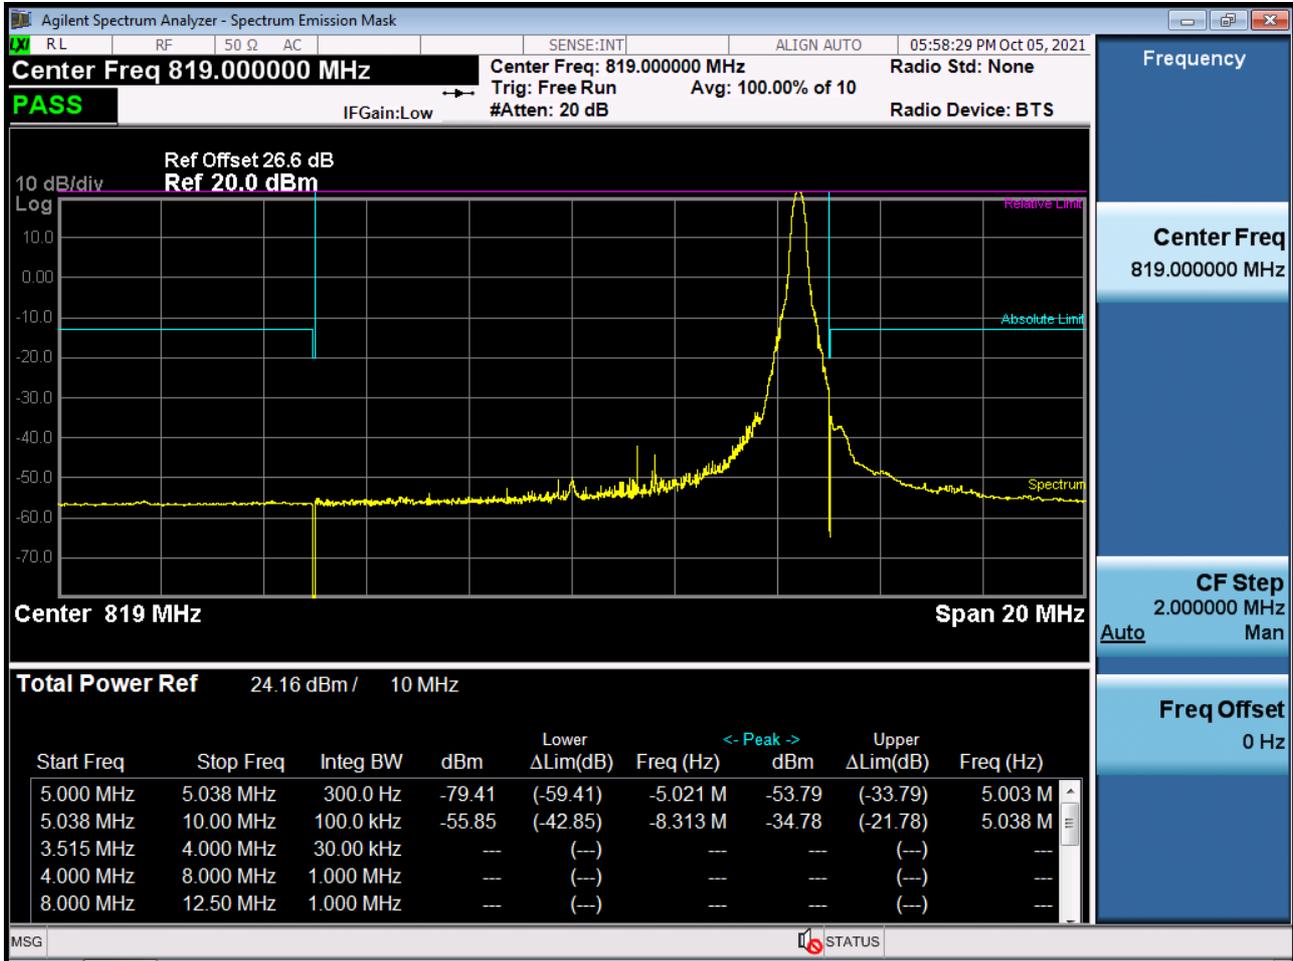


BAND 26. Low Channel Edge Plot (15 M BW Ch.26765 QPSK RB 1, Offset 0)

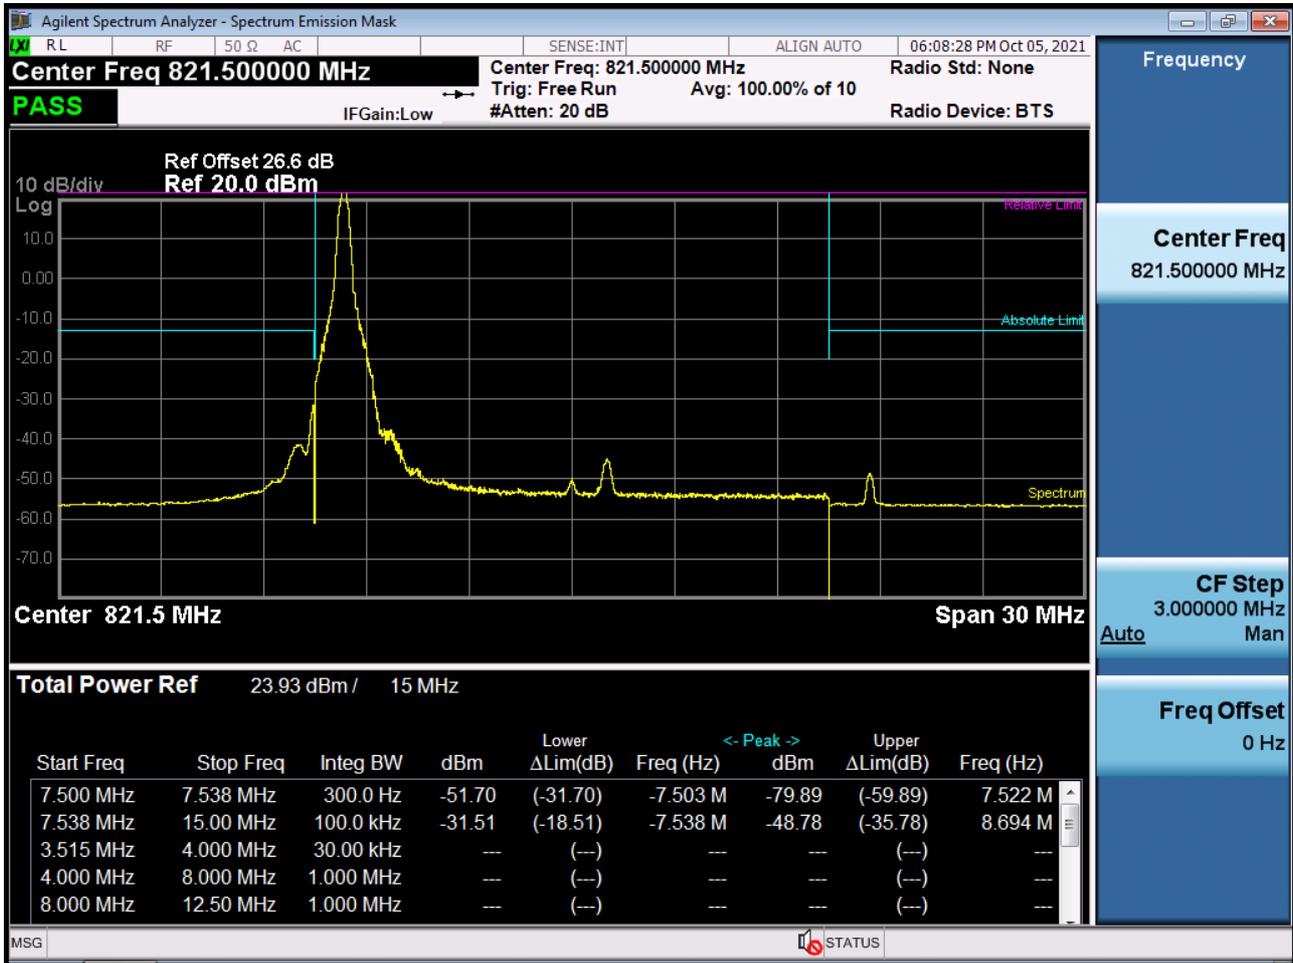


BAND 26. Low Channel Edge Plot (15 M BW Ch.26765 QPSK RB 75, Offset0)



BAND 26. Mid Channel Edge Plot (15 M BW Ch.26765 QPSK\_RB1\_Offset 74)

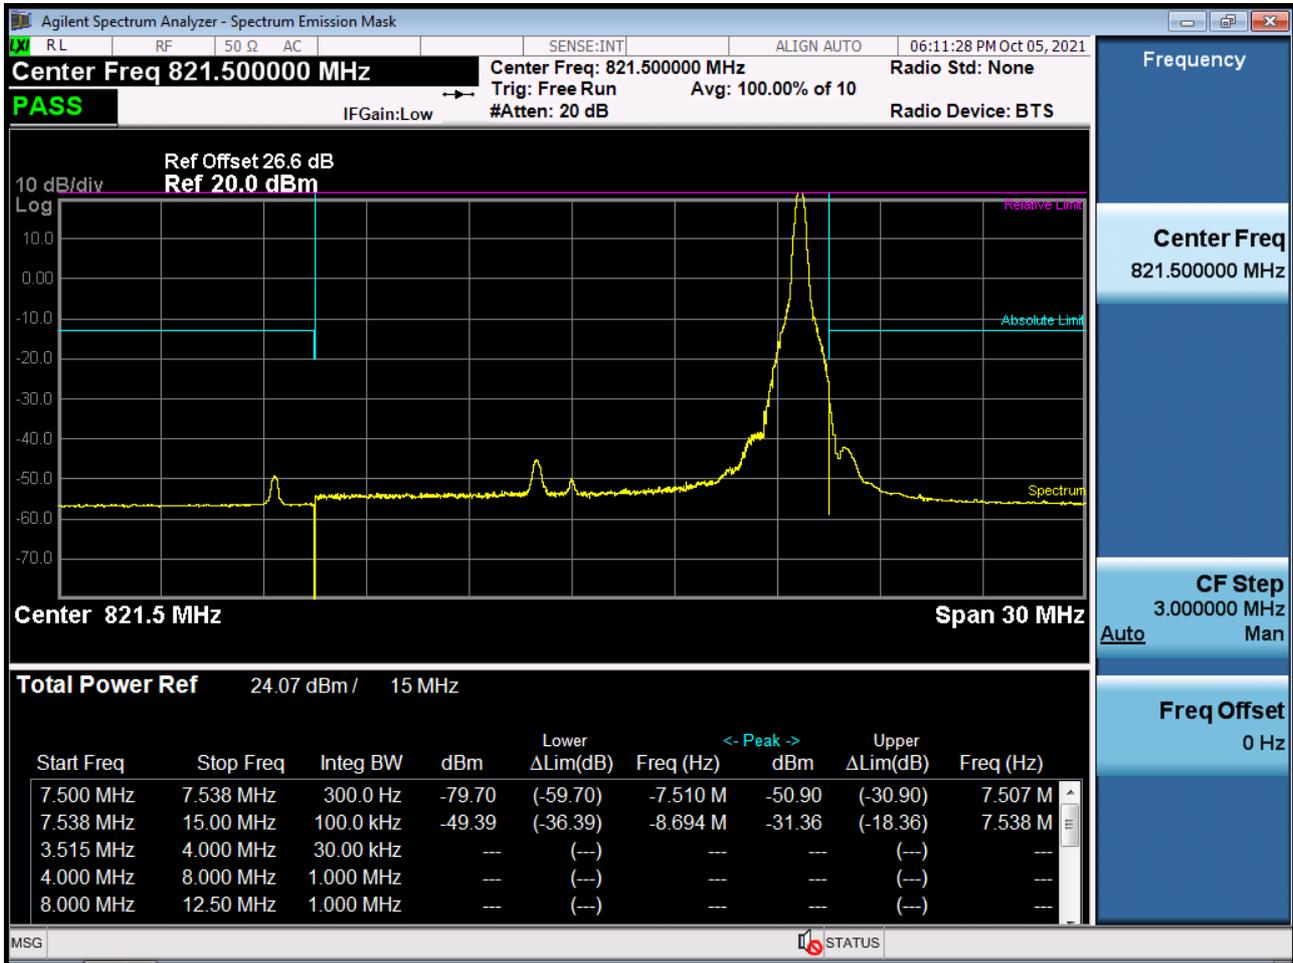


BAND 26. Mid Band Edge Plot (15 M BW Ch.26765 QPSK RB 1, Offset74)

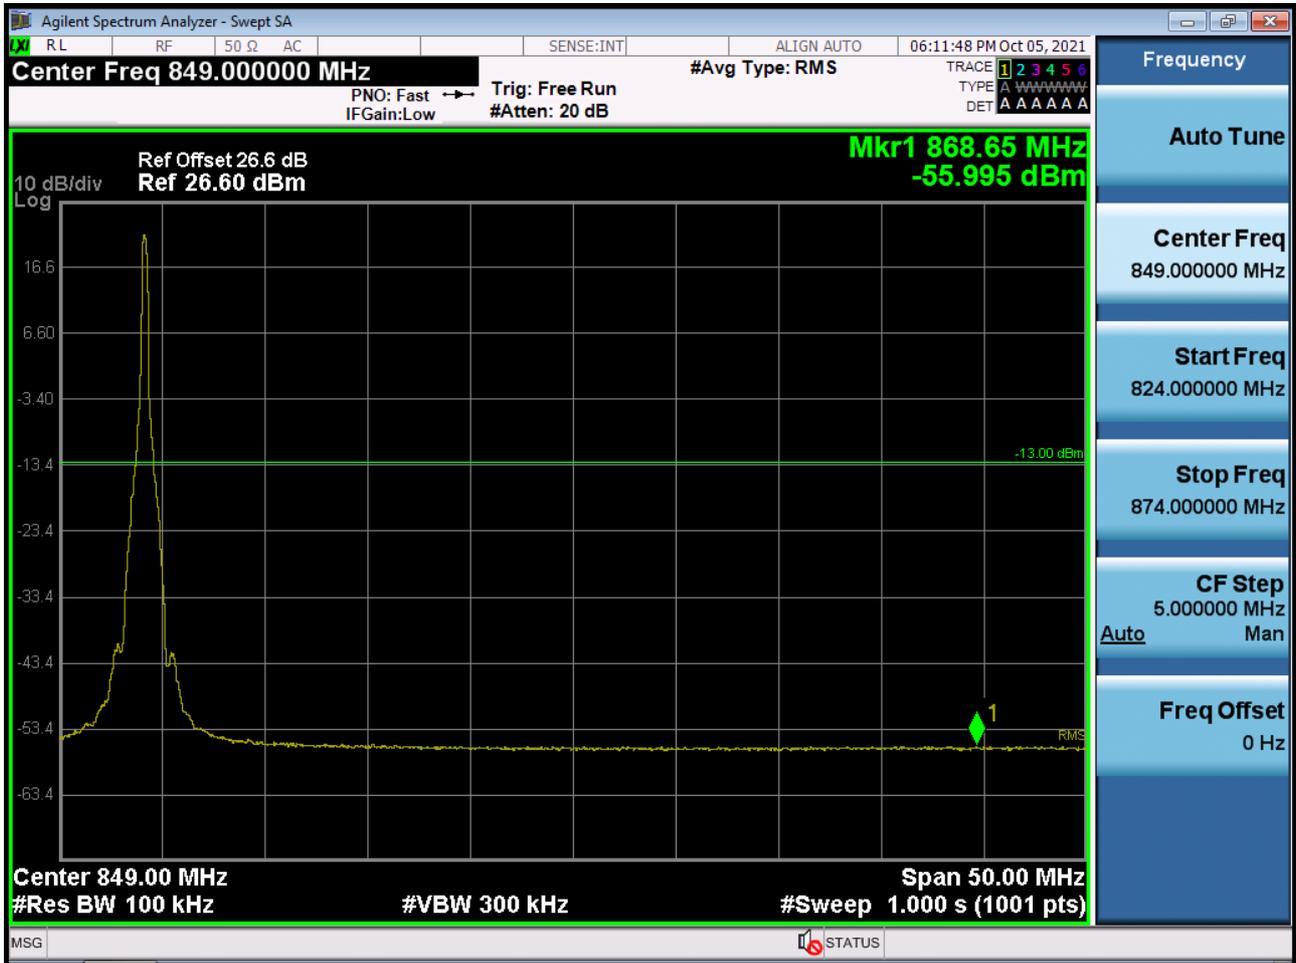





BAND 26. Upper Channel Edge Plot (1.4 M BW Ch.26783 QPSK\_RB1\_Offset 5)

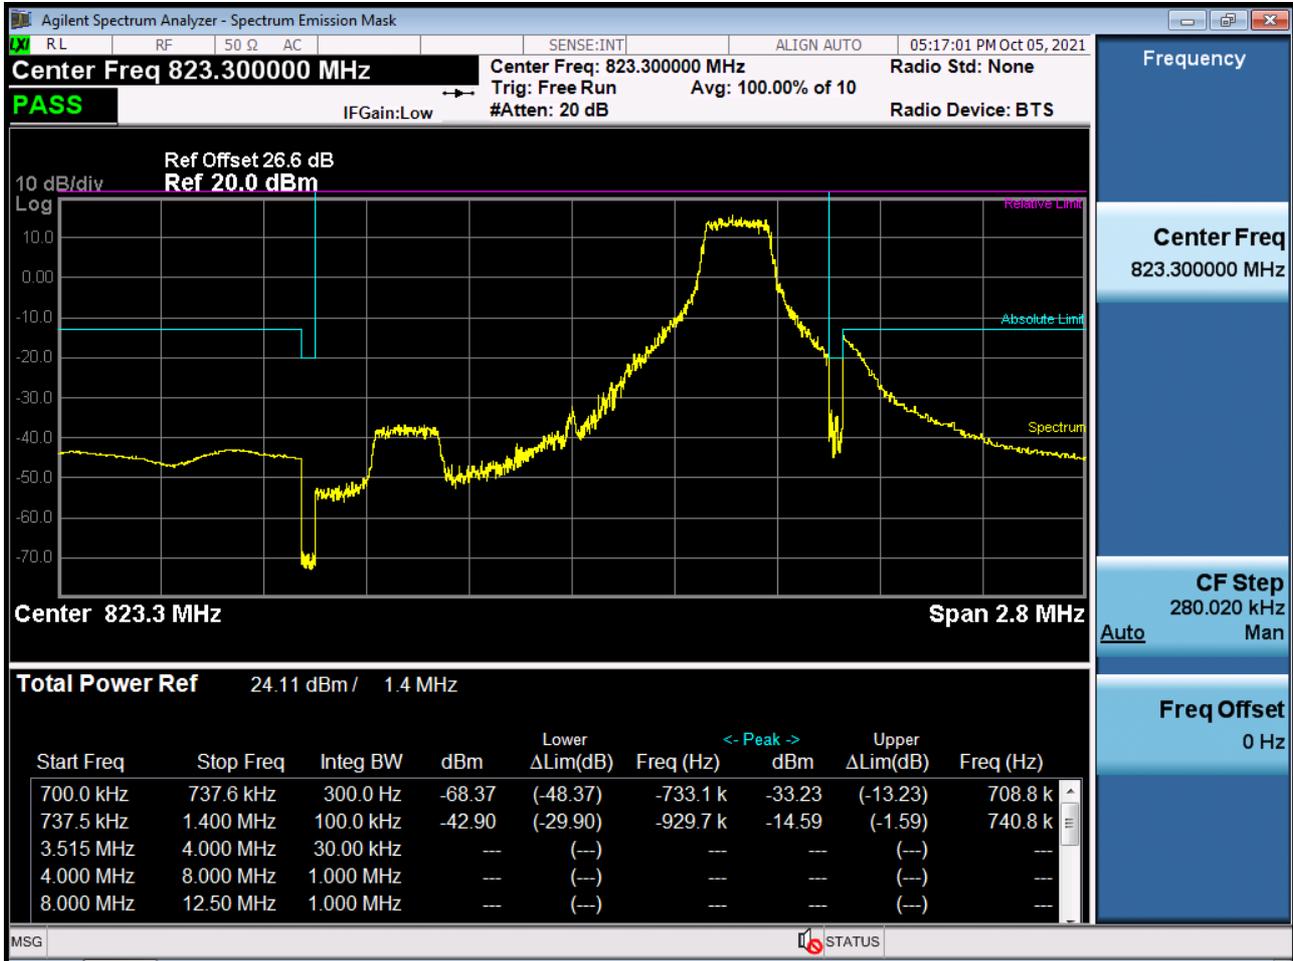

BAND 26. Upper Channel Edge Plot (1.4 M BW Ch.26783 QPSK\_RB6\_Offset 0)

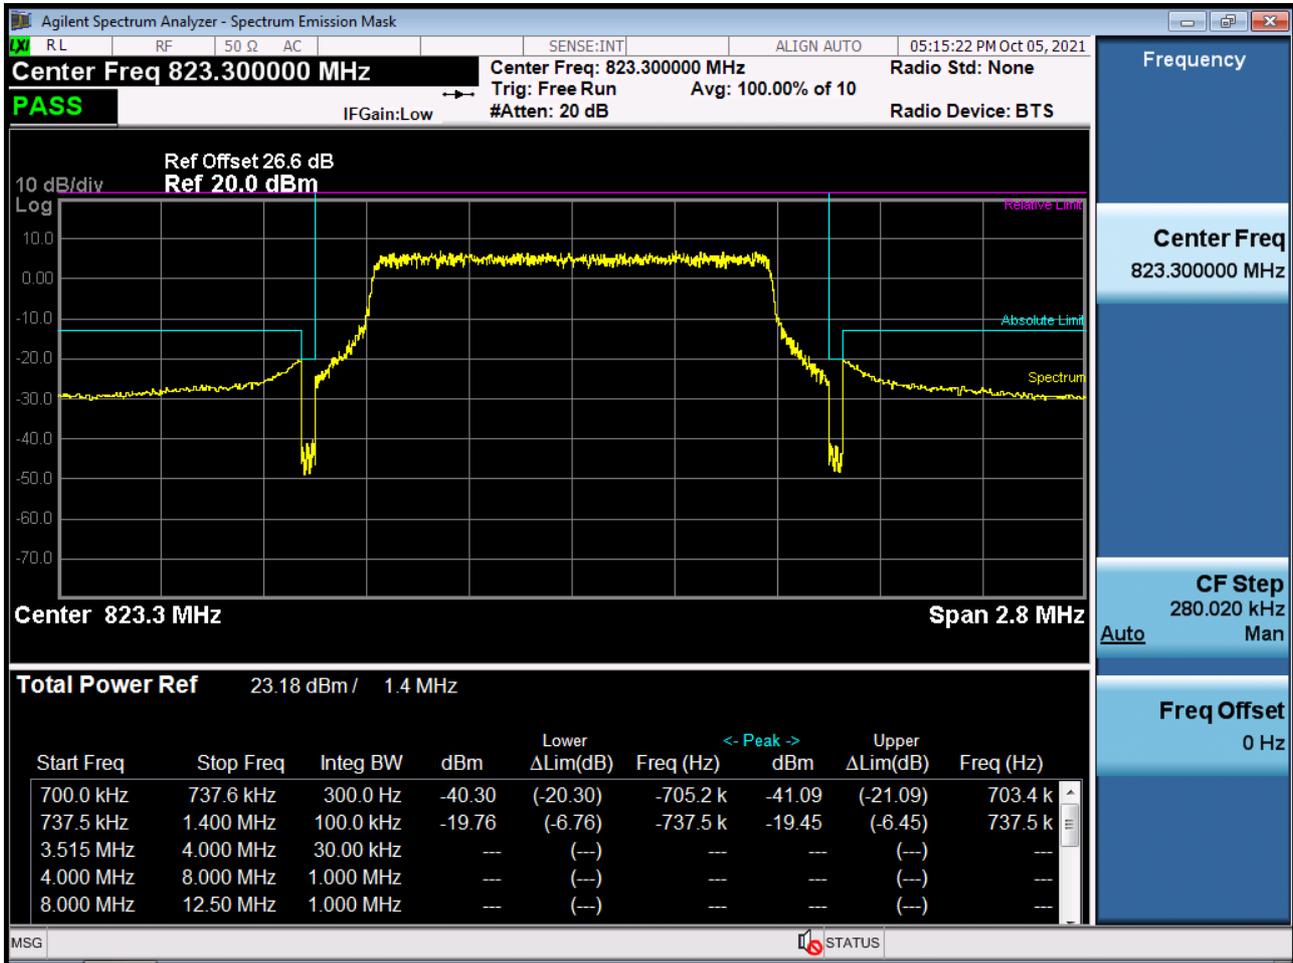


BAND 26. Upper Channel Edge Plot (3 M BW Ch.26775 QPSK\_RB1\_Offset 14)

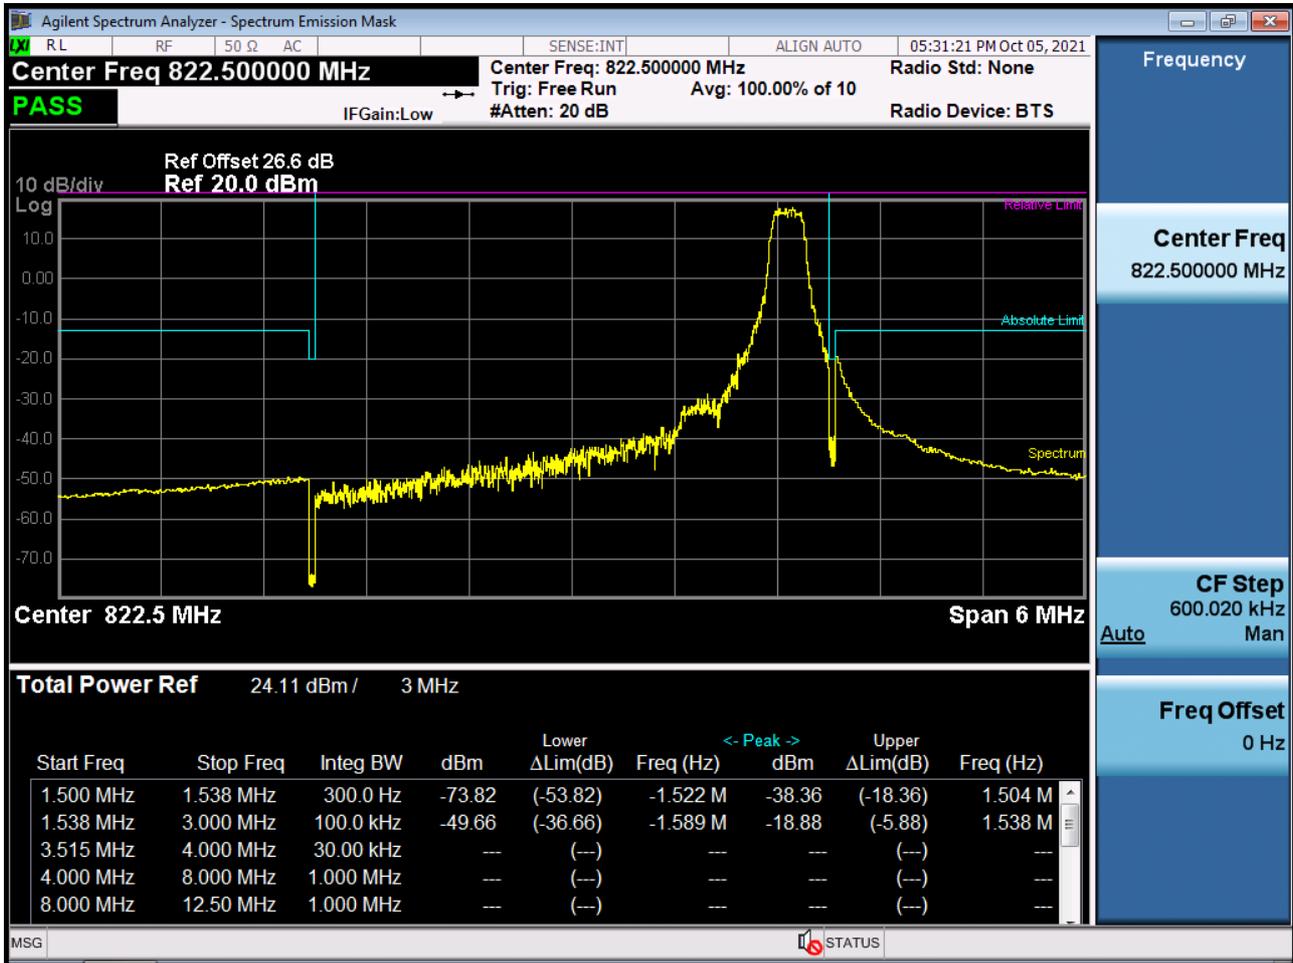


BAND 26. Upper Channel Edge Plot (3 M BW Ch.26775 QPSK\_RB15\_Offset 0)




BAND 26. Upper Channel Edge Plot (5 M BW Ch.26765 QPSK\_RB1\_Offset 24)

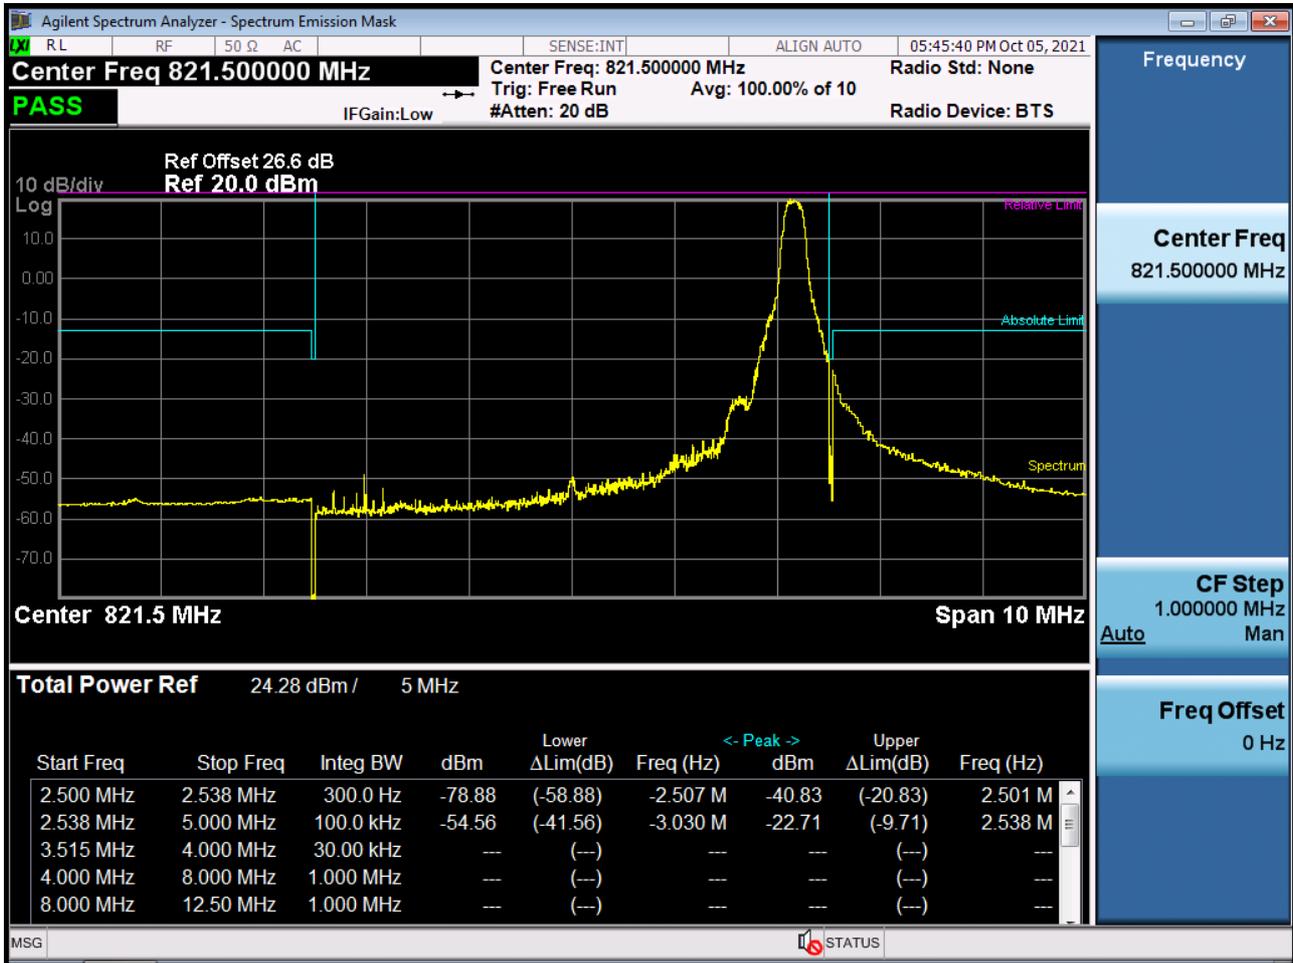


BAND 26. Upper Channel Edge Plot (5 M BW Ch.26765 QPSK\_RB25\_Offset 0)

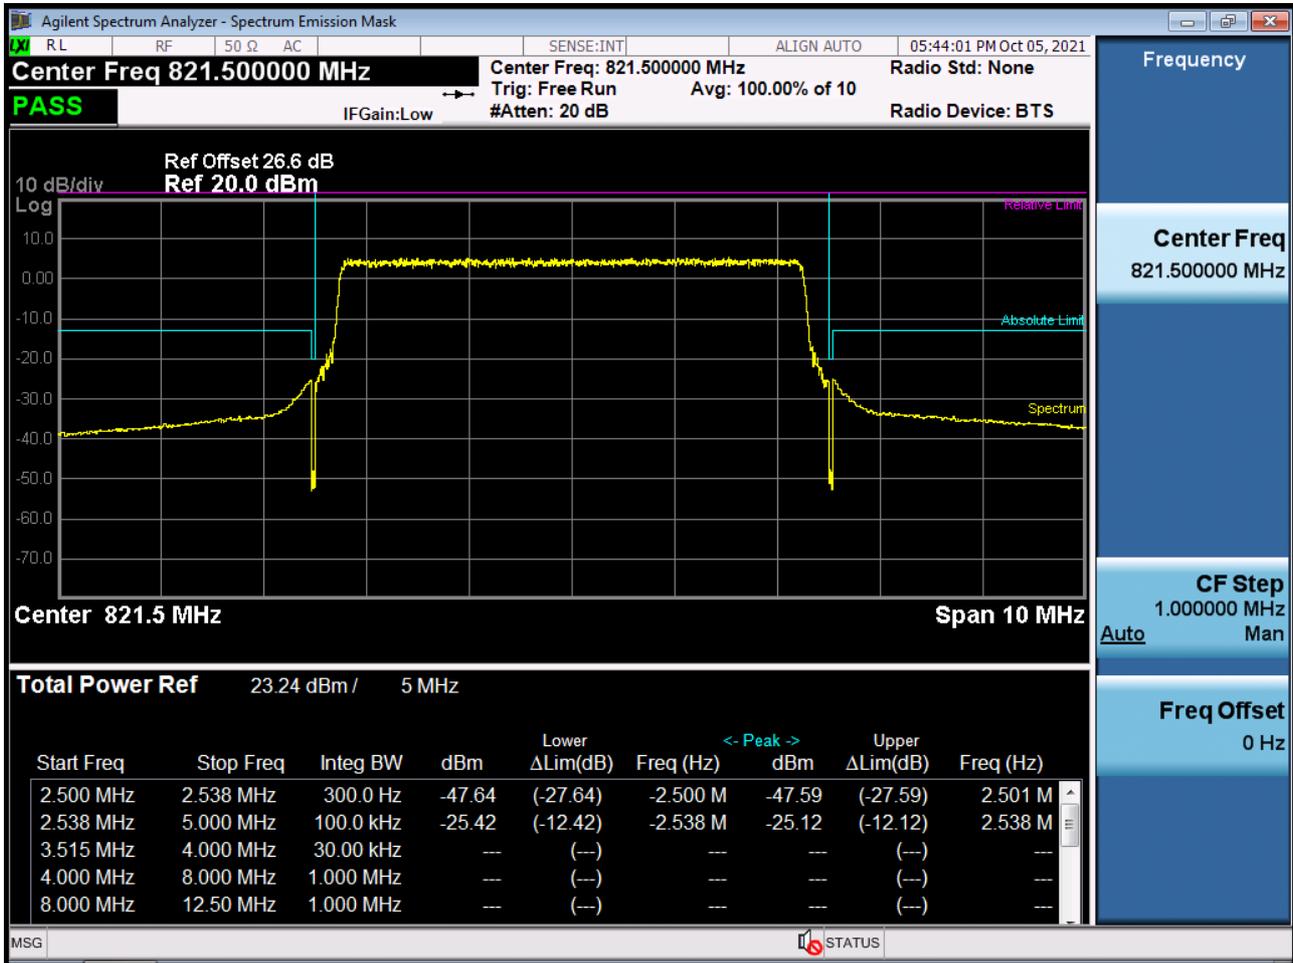


BAND 26. Conducted Spurious (26697 ch\_1.4 MHz\_QPSK\_RB 1\_0)

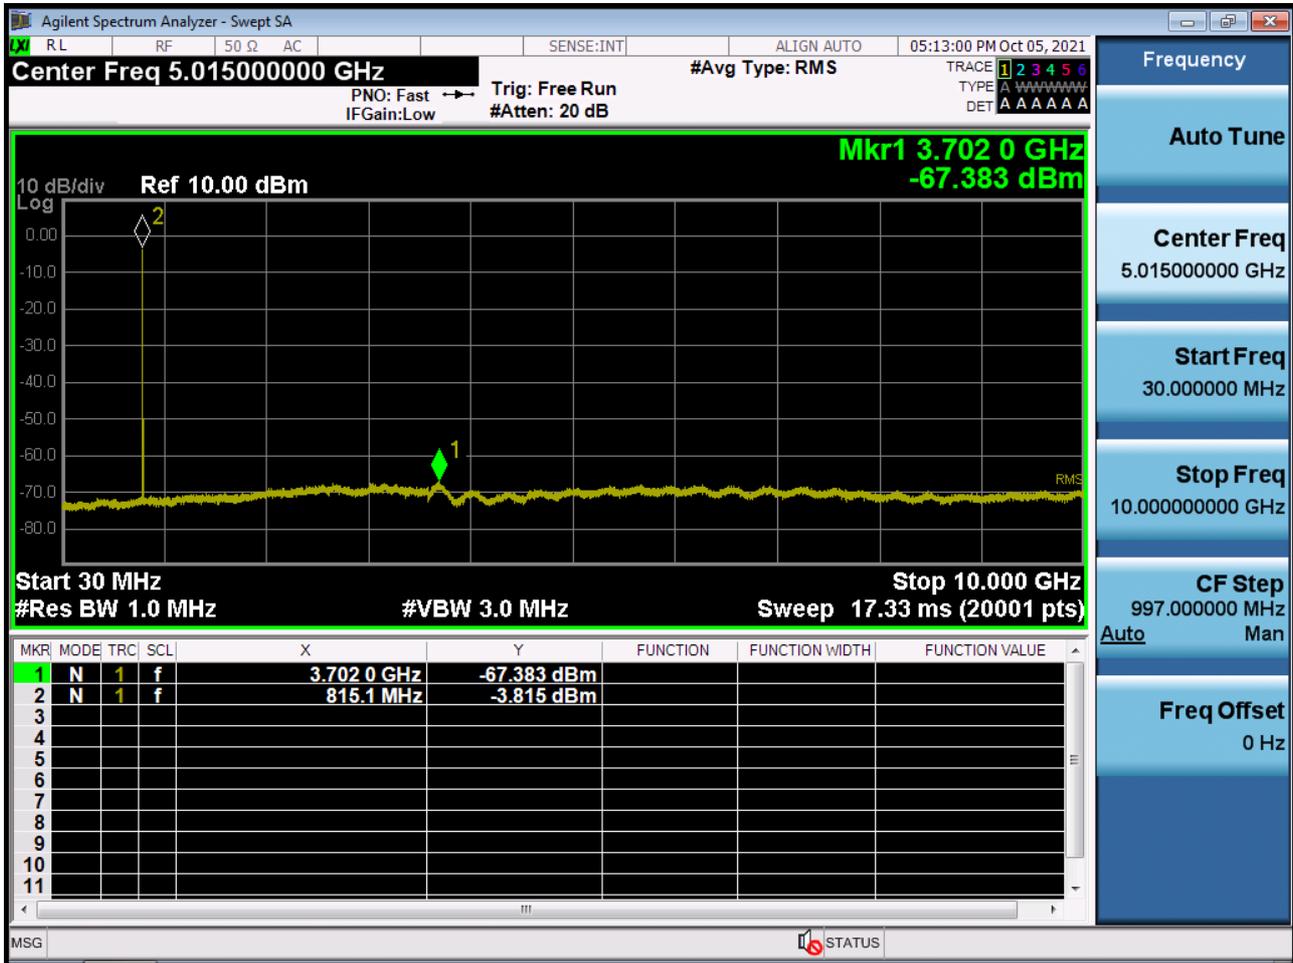


BAND 26. Conducted Spurious (26783 ch\_1.4 MHz\_QPSK\_RB 1\_0)

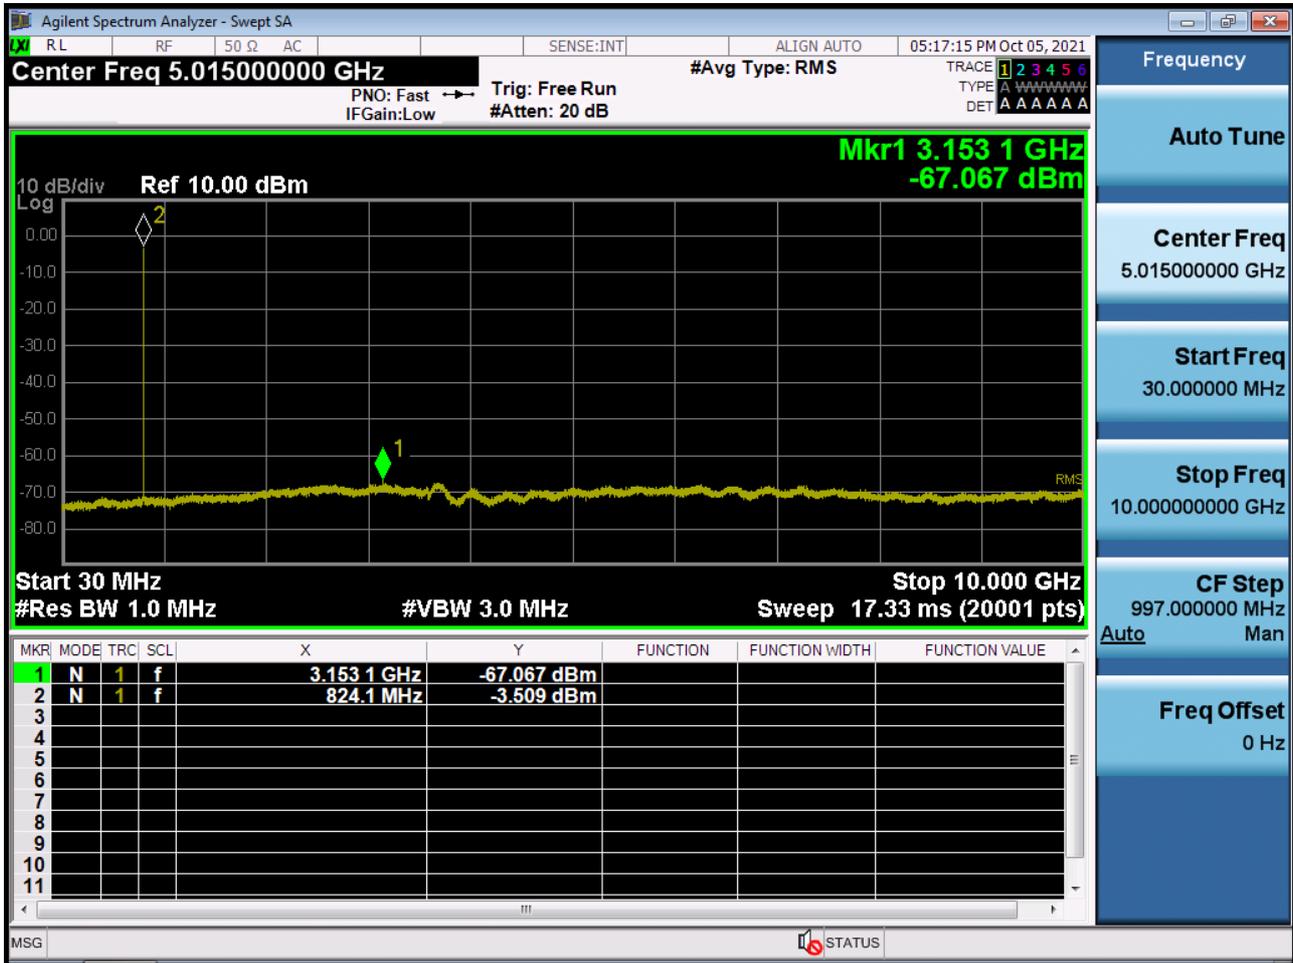


BAND 26. Conducted Spurious (26705 ch\_3 MHz\_QPSK\_RB 1\_0)

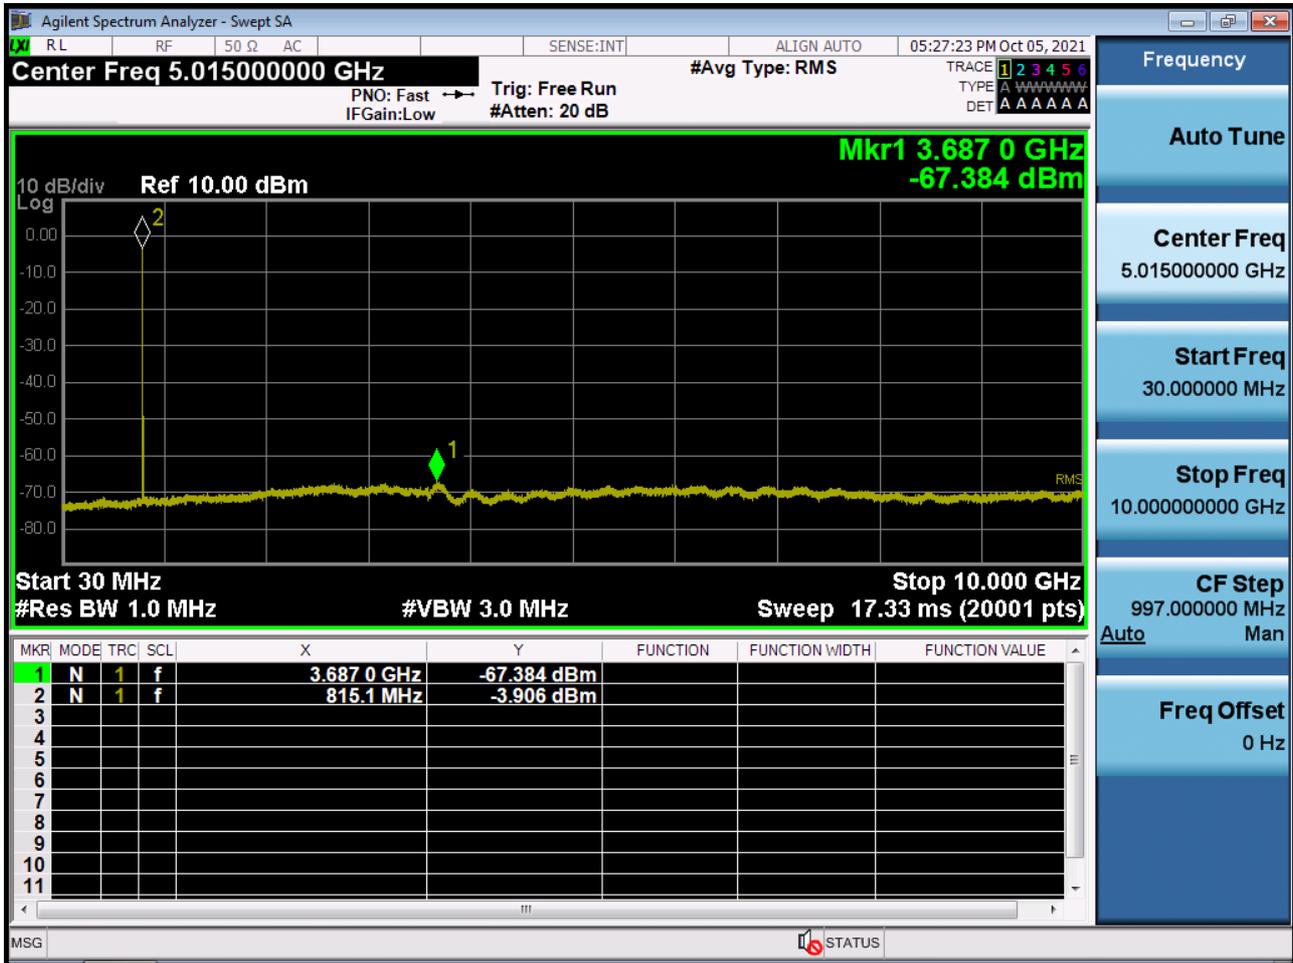


BAND 26. Conducted Spurious (26775 ch\_3 MHz\_QPSK\_RB 1\_0)

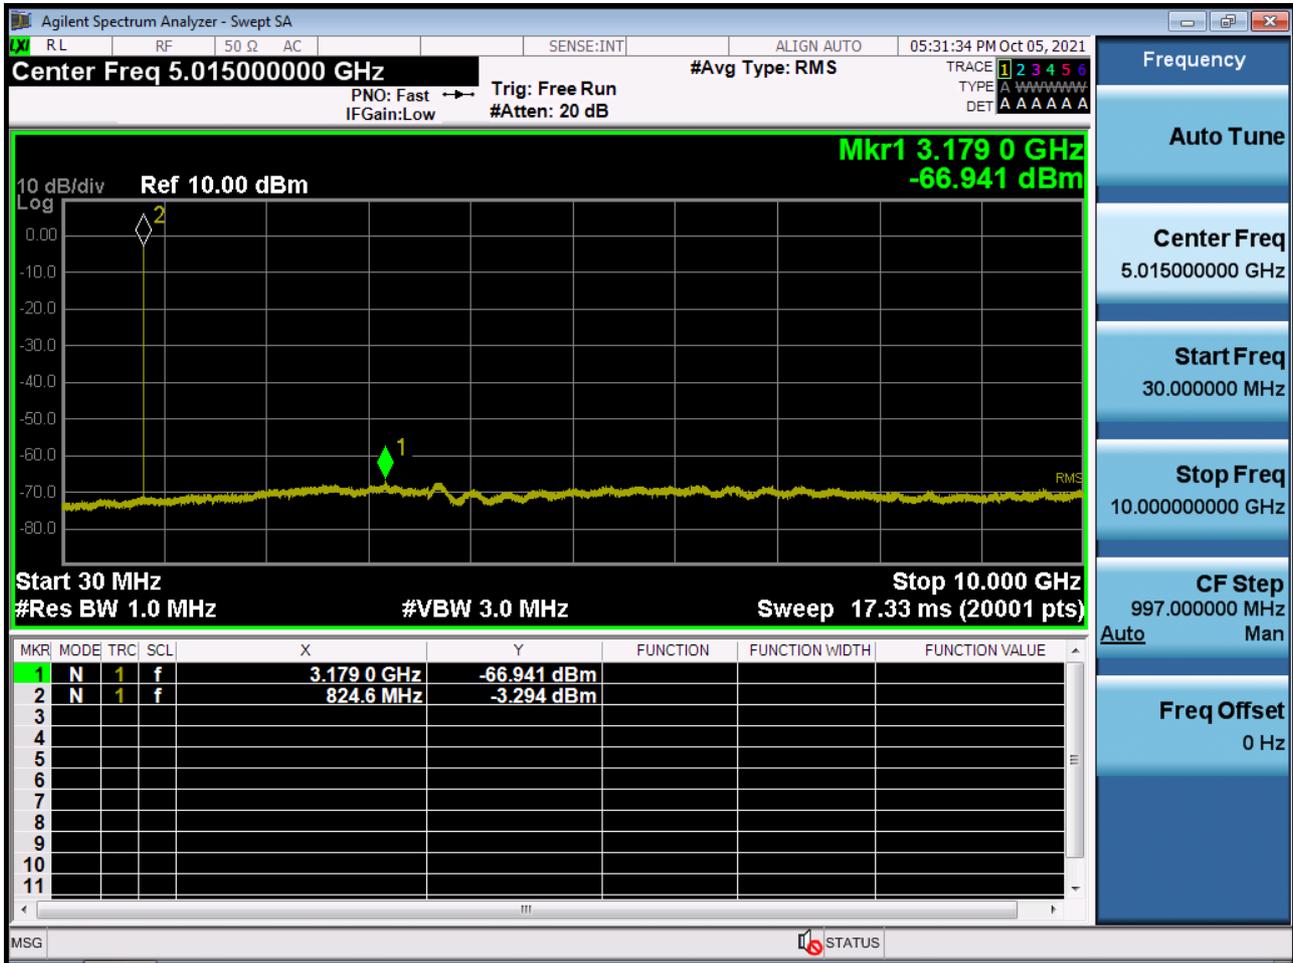


BAND 26. Conducted Spurious (26715 ch\_5 MHz\_QPSK\_RB 1\_0)

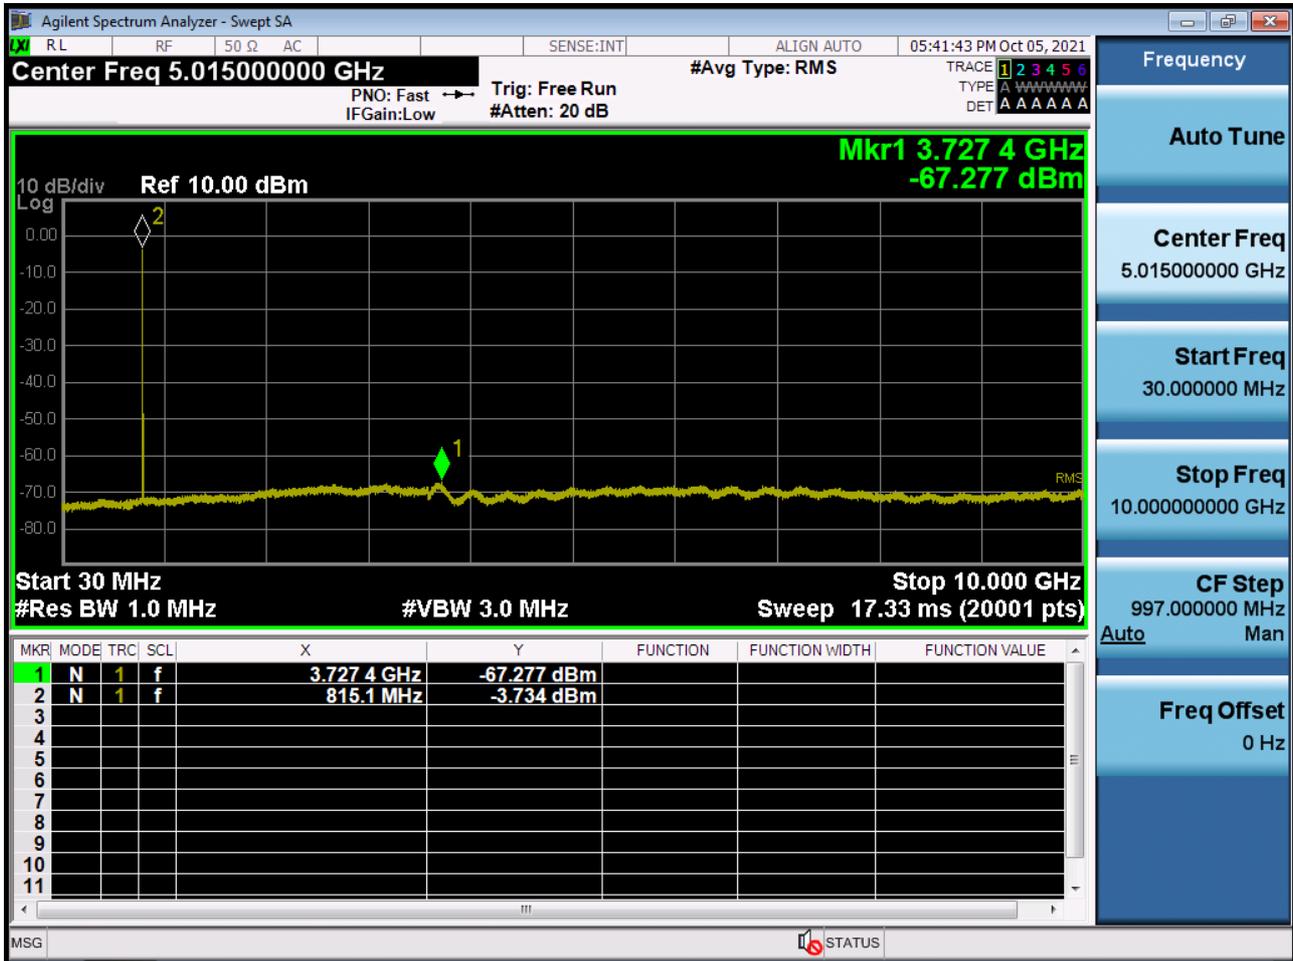


BAND 26. Conducted Spurious (26765 ch\_5 MHz\_QPSK\_RB 1\_0)

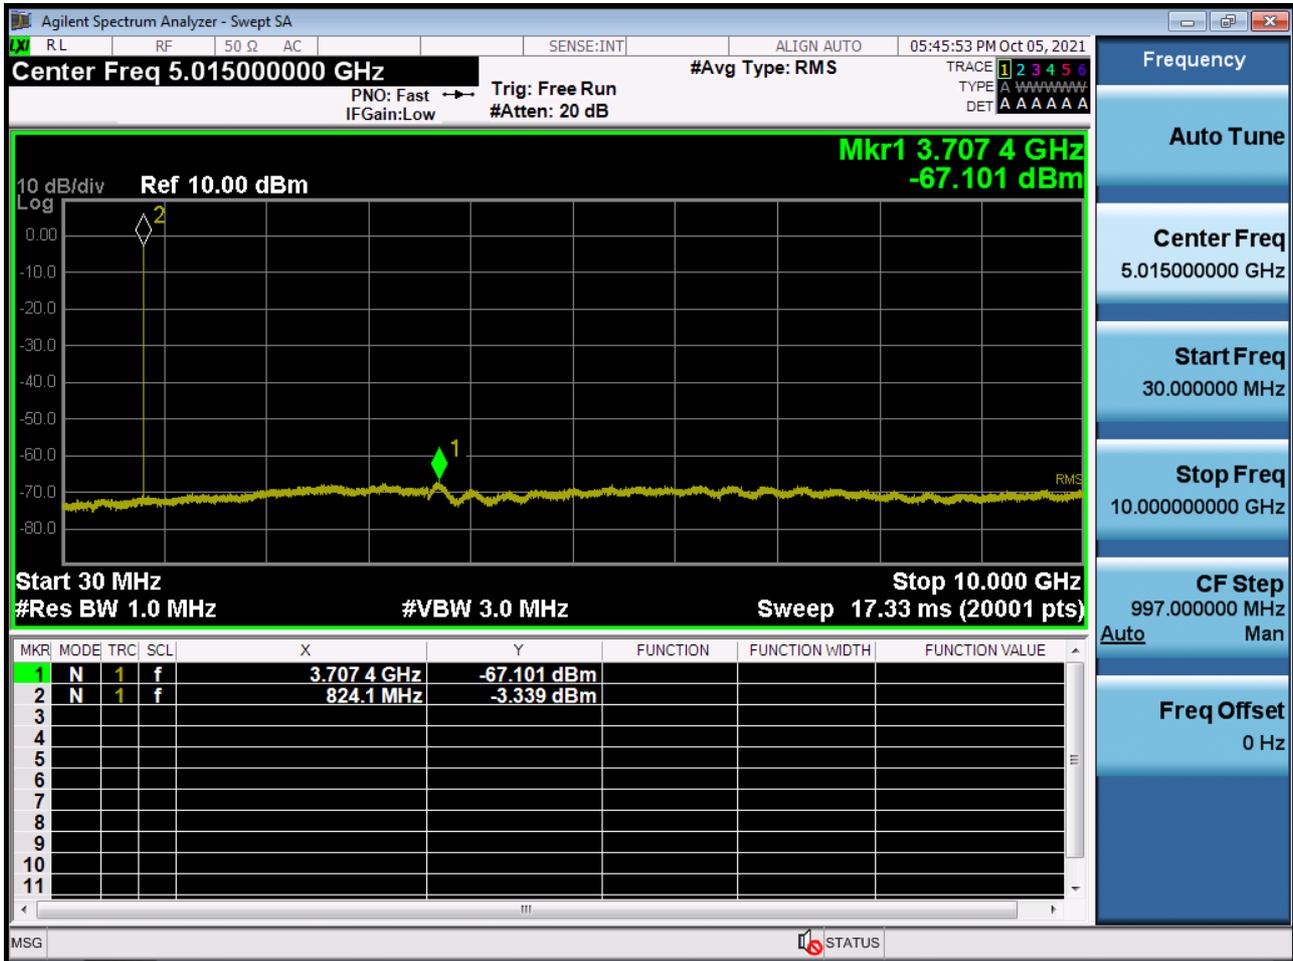

BAND 26. Conducted Spurious (26740 ch\_10 MHz\_QPSK\_RB 1\_0)

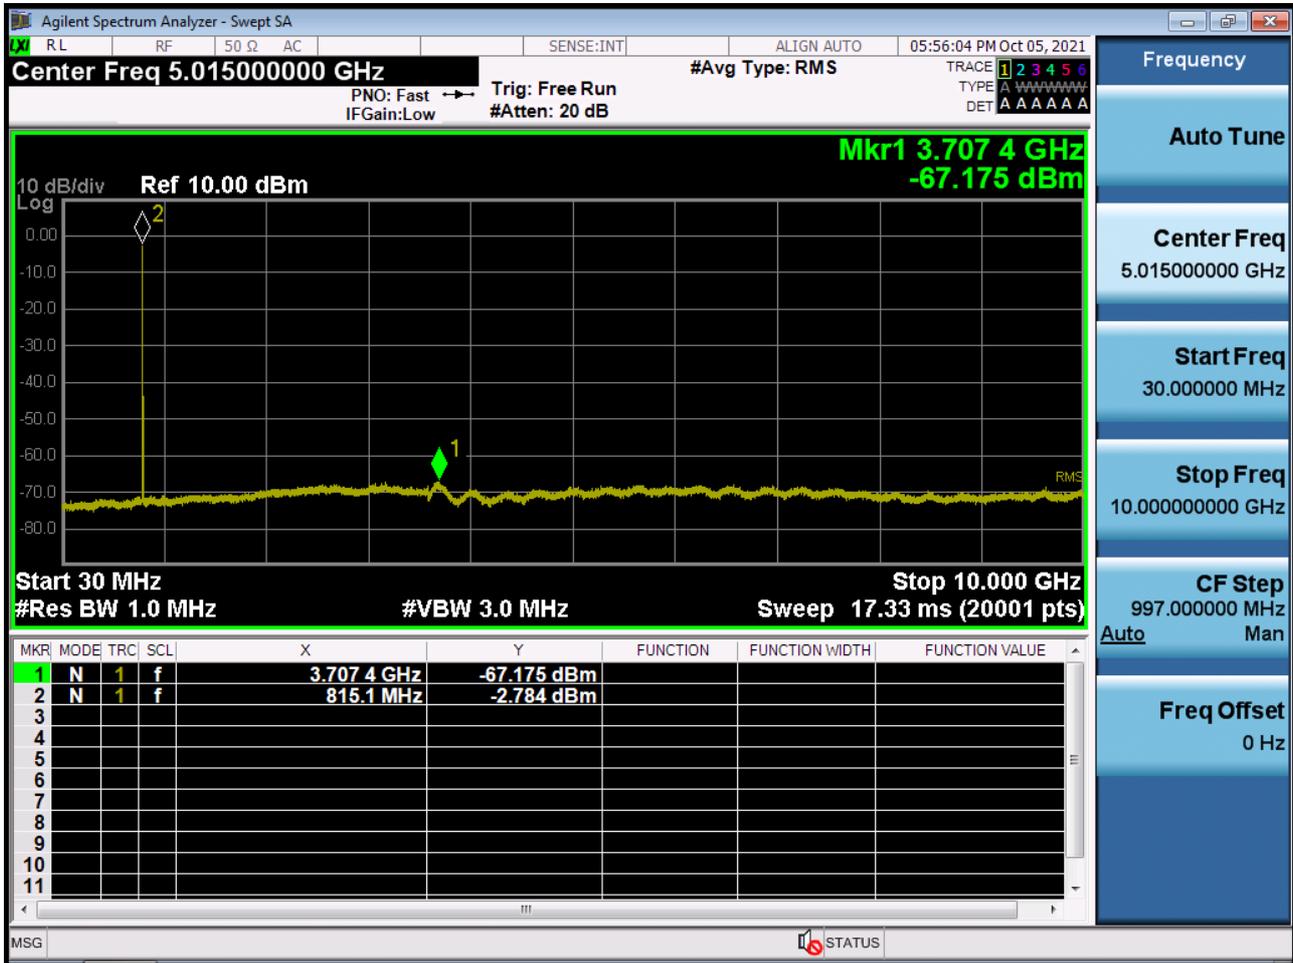


BAND 26. Conducted Spurious (26765 ch\_15 MHz\_QPSK\_RB 1\_0)

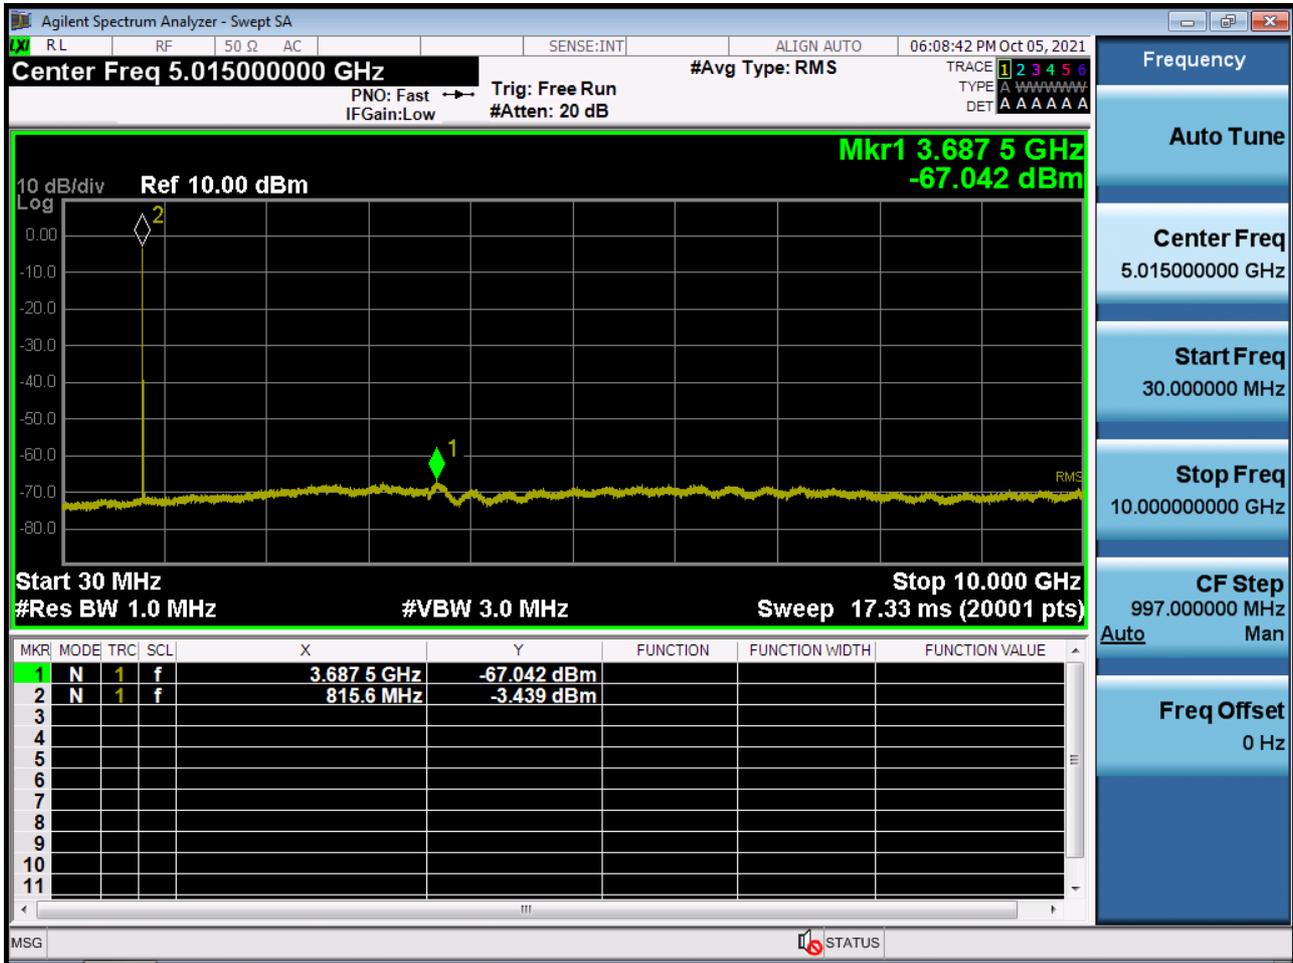


## 10. TEST PLOTS (STRADDLE CHANNEL)


BAND 26. Conducted Spurious (1.4 MHz\_QPSK\_RB 1\_0)

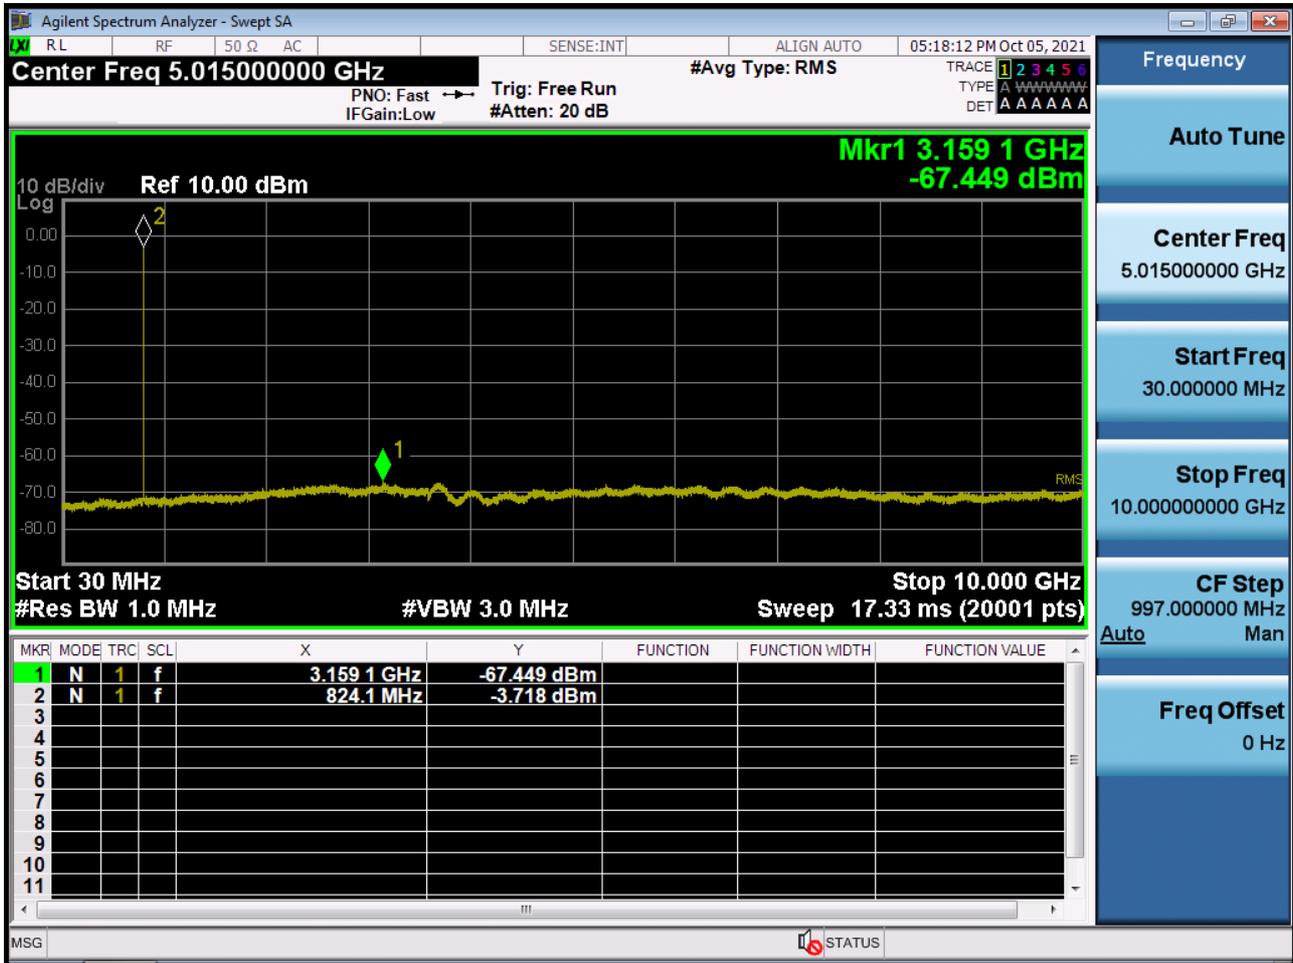


BAND 26. Conducted Spurious (3 MHz\_QPSK\_RB 1\_0)

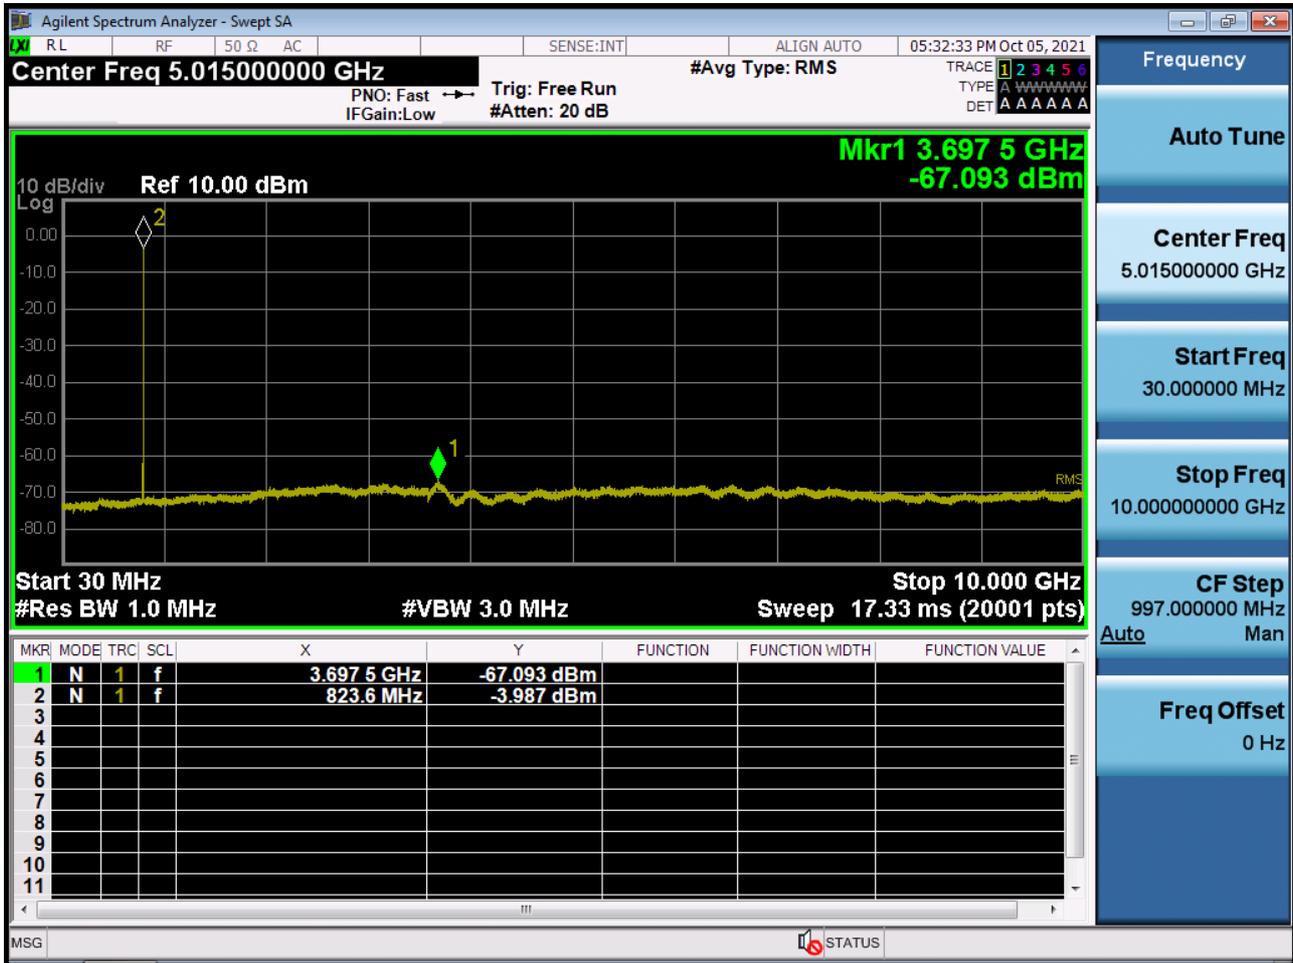


BAND 26. Conducted Spurious (5 MHz\_QPSK\_RB 1\_0)

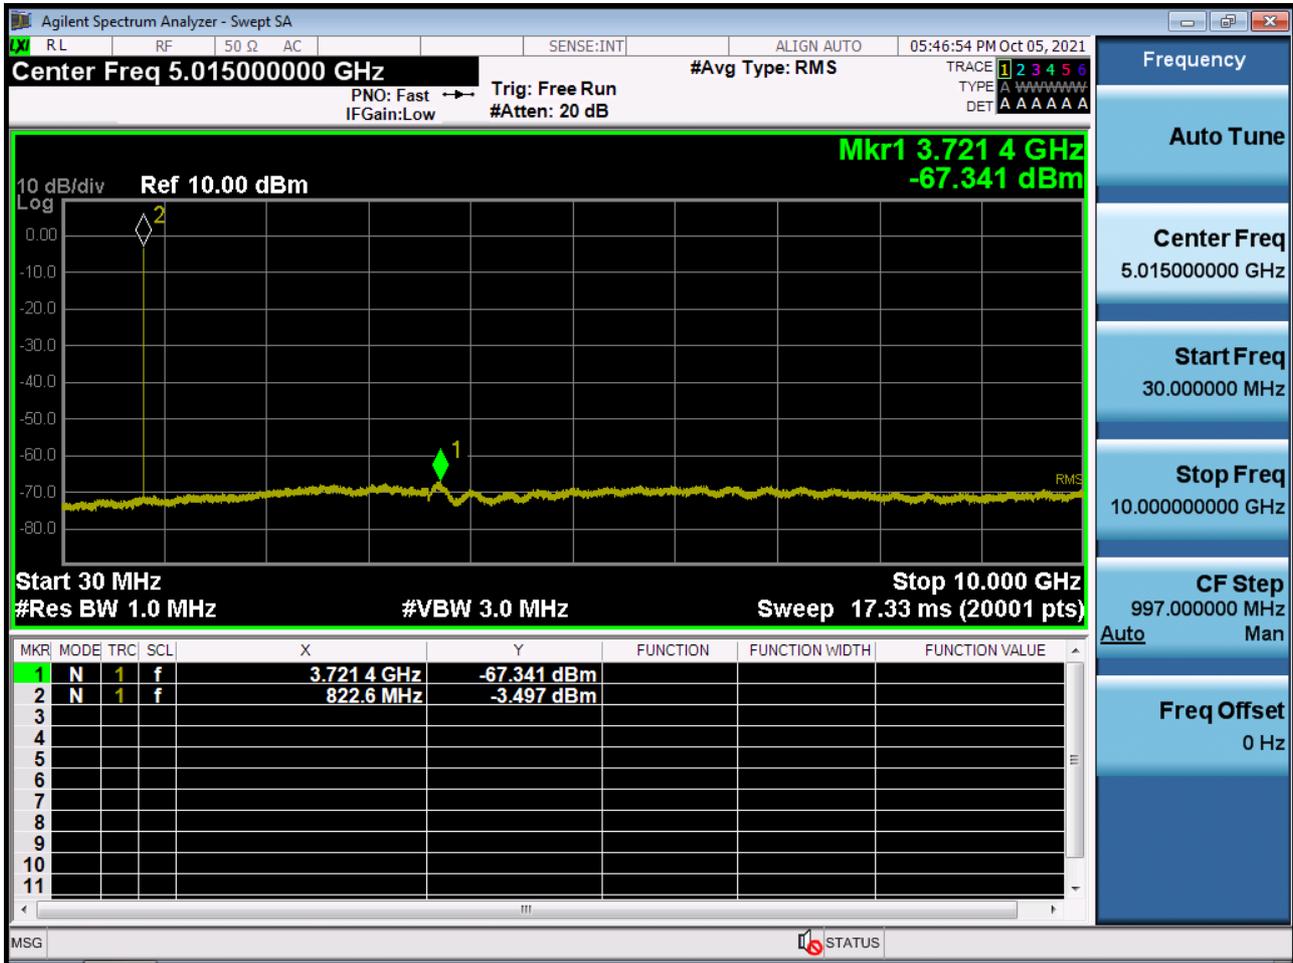


BAND 26. Conducted Spurious (10 MHz\_QPSK\_RB 1\_0)

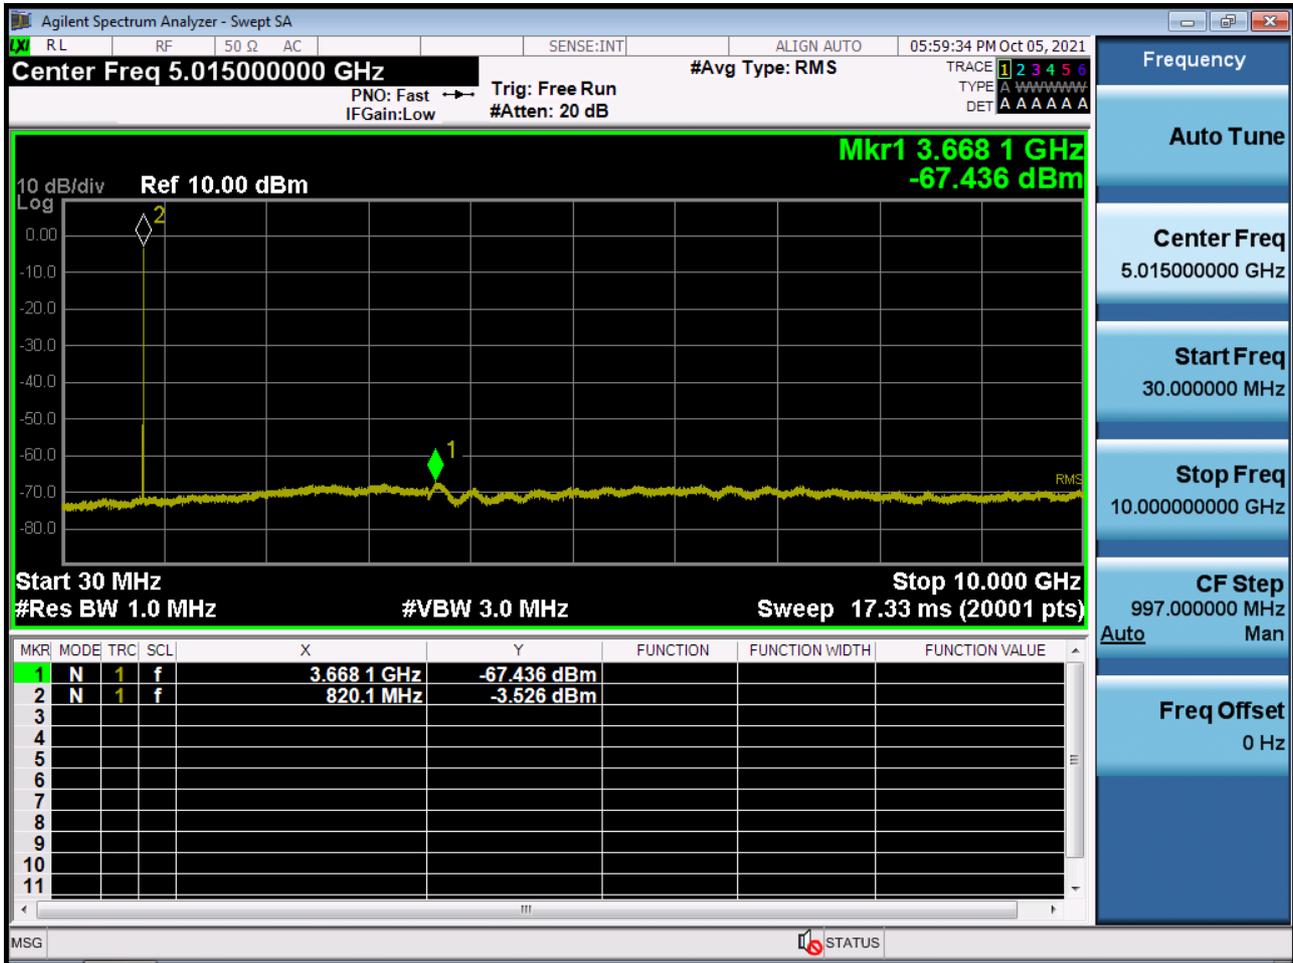


BAND 26. Channel Edge (1.4 MHz\_QPSK\_RB 1\_0)

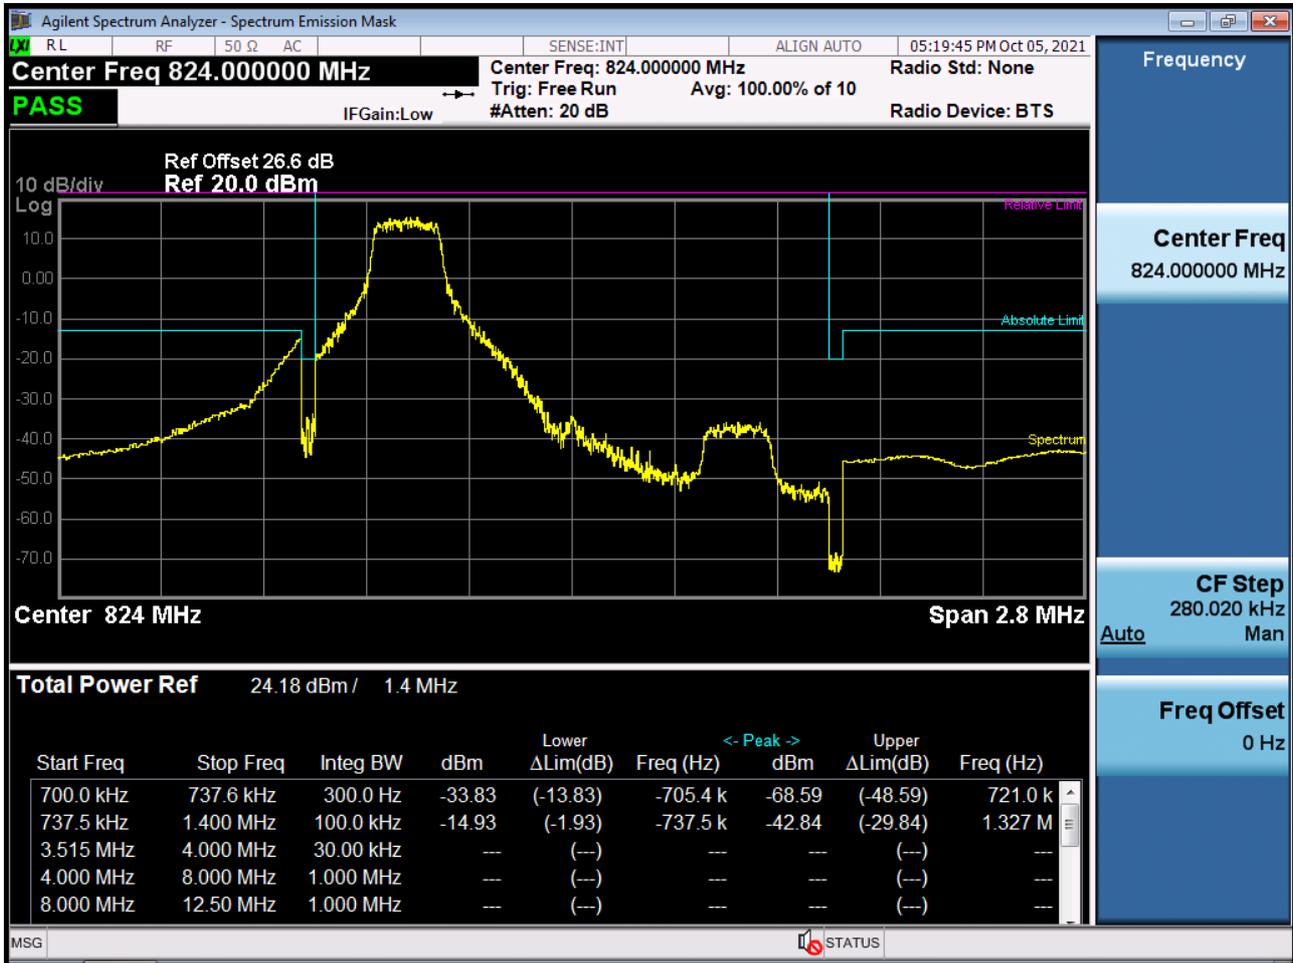


BAND 26. Channel Edge (1.4 MHz\_QPSK\_RB 1\_5)

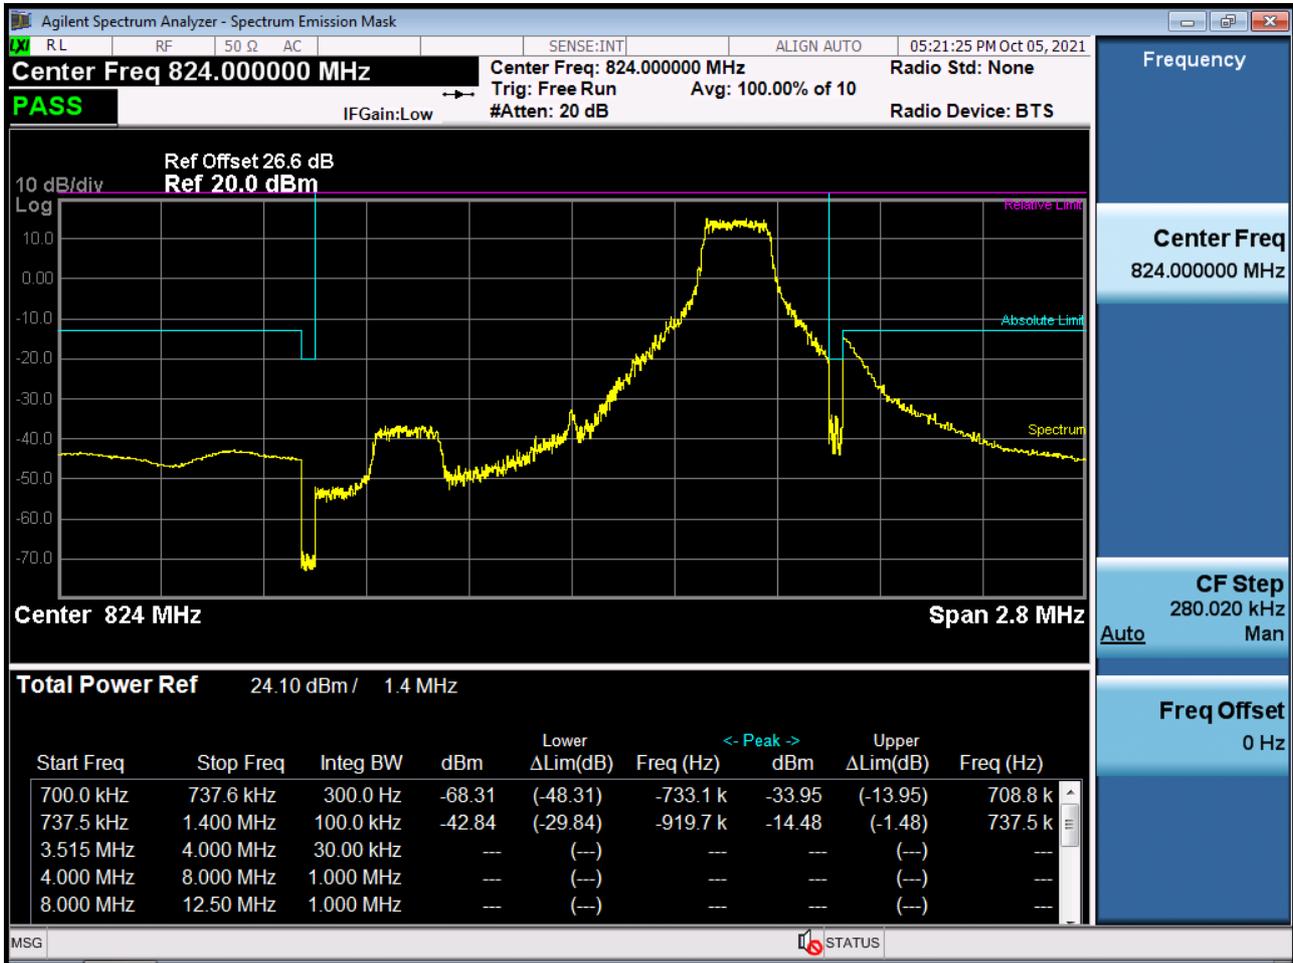


BAND 26. Channel Edge (1.4 MHz\_QPSK\_Full RB)

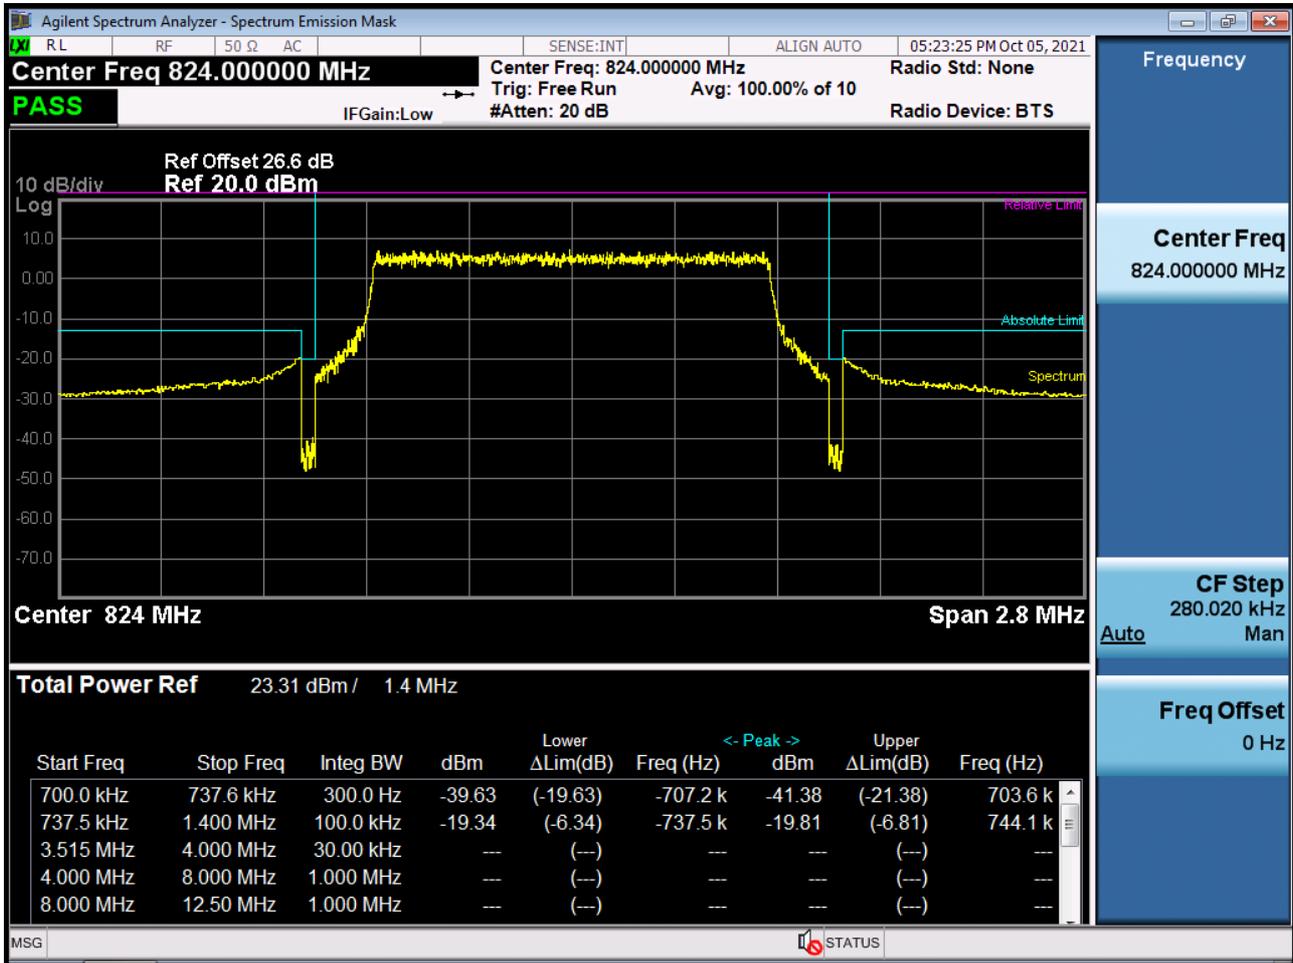

BAND 26. Channel Edge (3 MHz\_QPSK\_RB 1\_0)

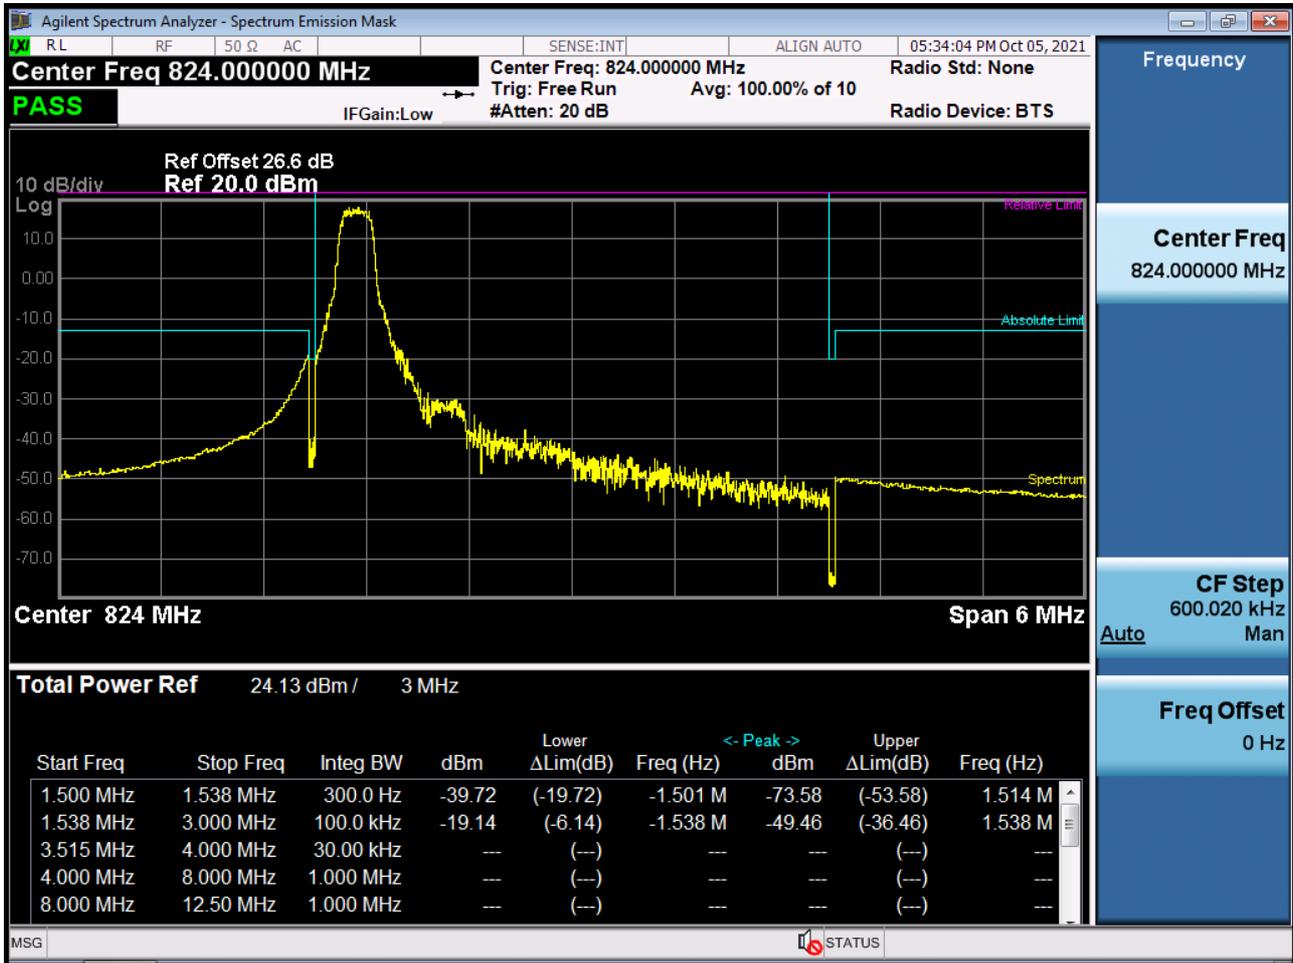


BAND 26. Channel Edge (3 MHz\_QPSK\_RB 1\_14)

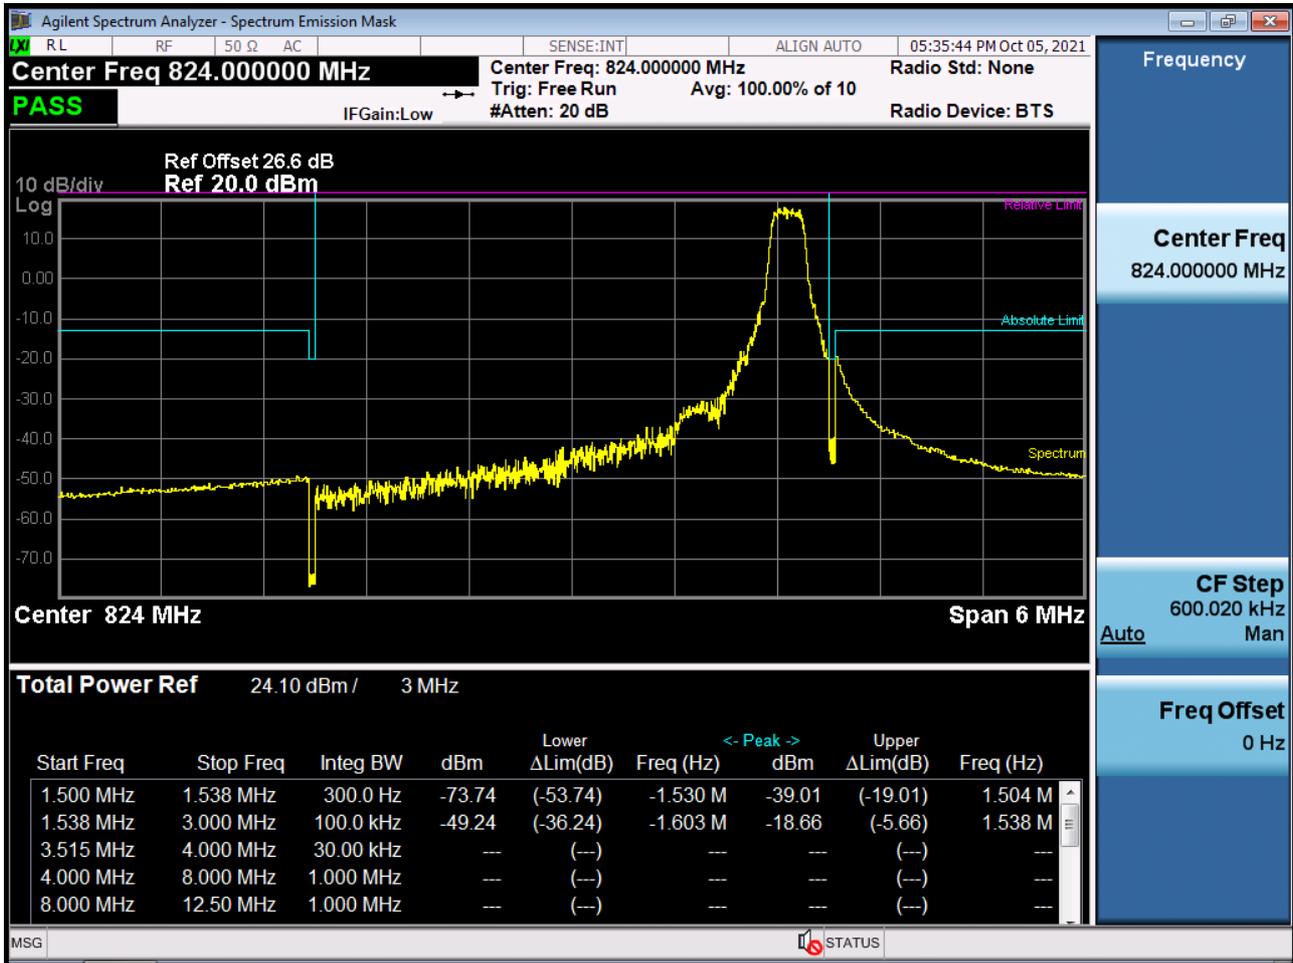


BAND 26. Channel Edge (3 MHz\_QPSK\_Full RB)




BAND 26. Channel Edge (5 MHz\_QPSK\_RB 1\_0)

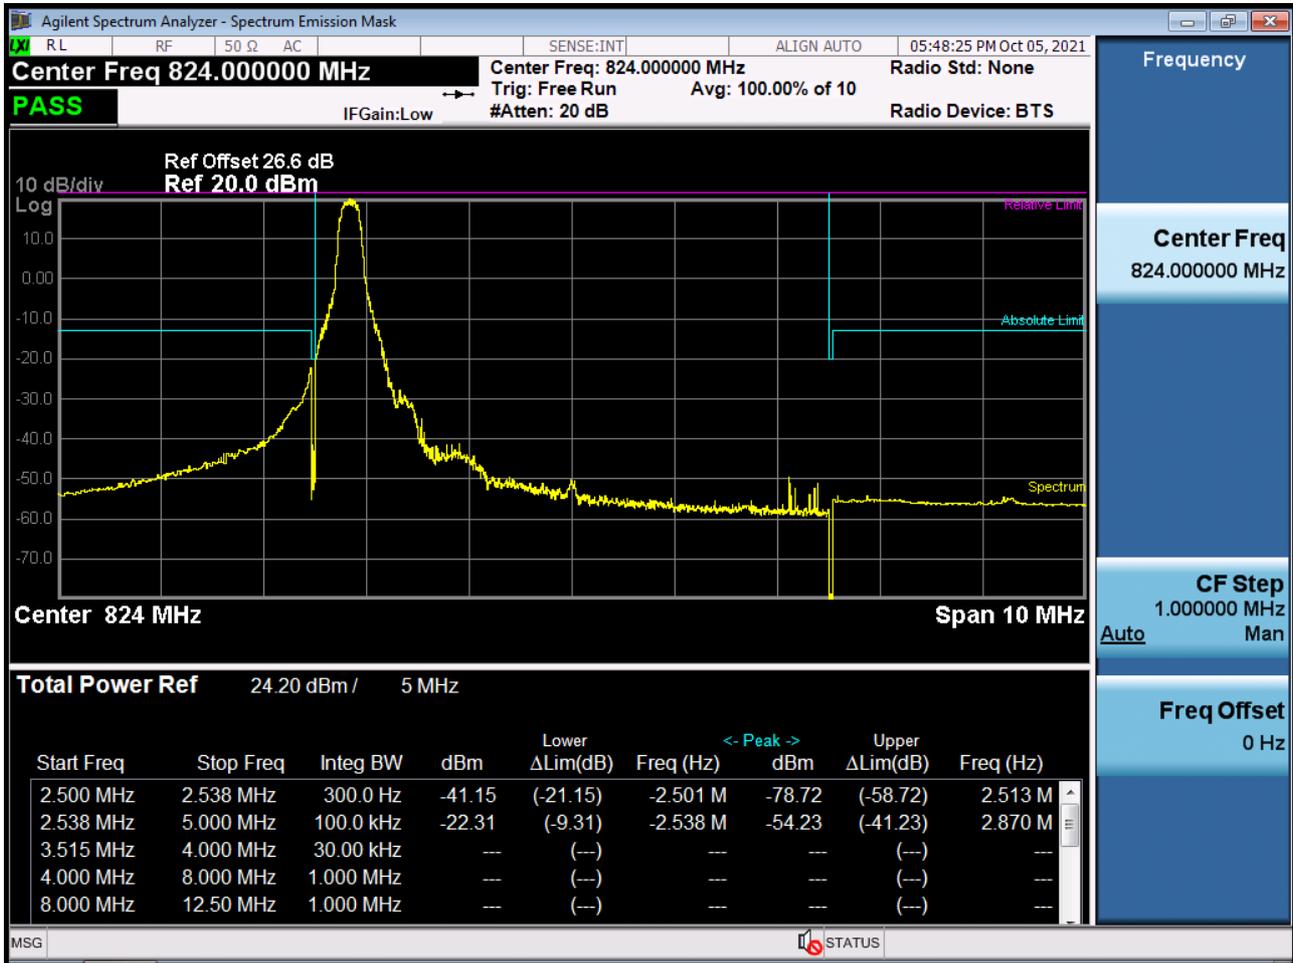


BAND 26. Channel Edge (5 MHz\_QPSK\_RB 1\_24)

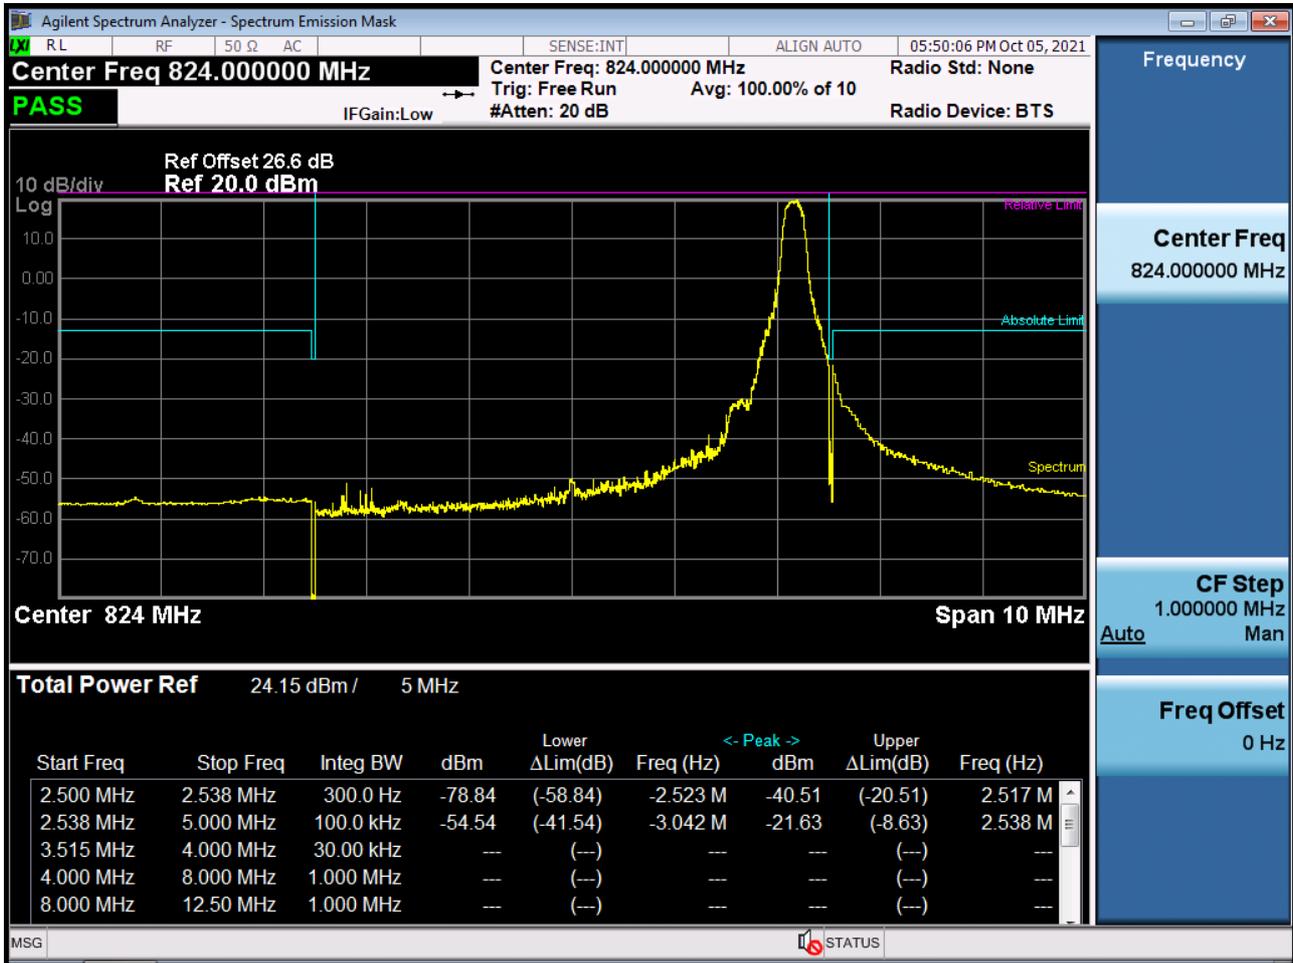


BAND 26. Channel Edge (5 MHz\_QPSK\_Full RB)

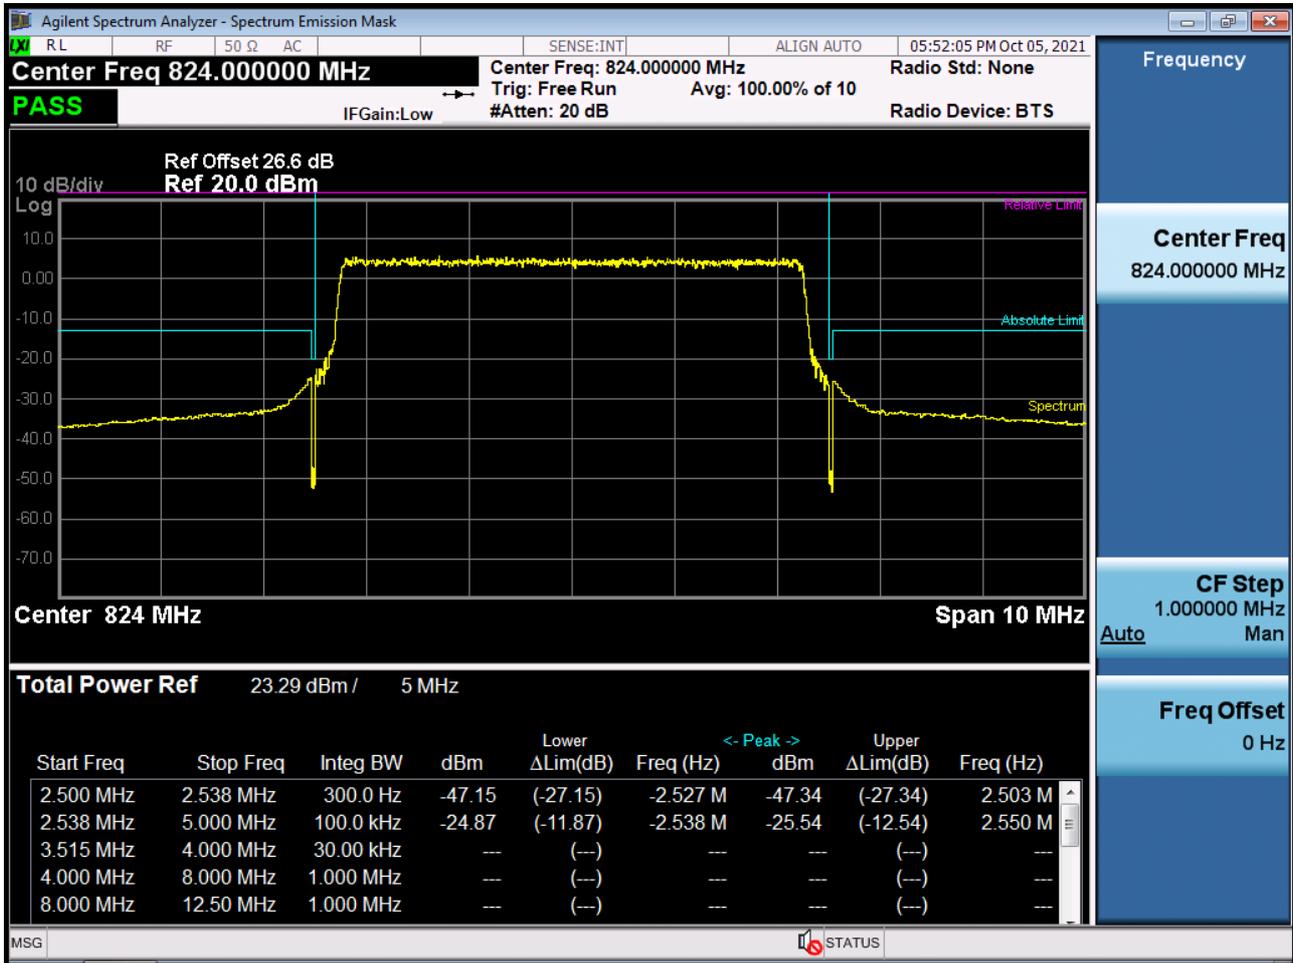


BAND 26. Channel Edge (10 MHz\_QPSK\_RB 1\_0)

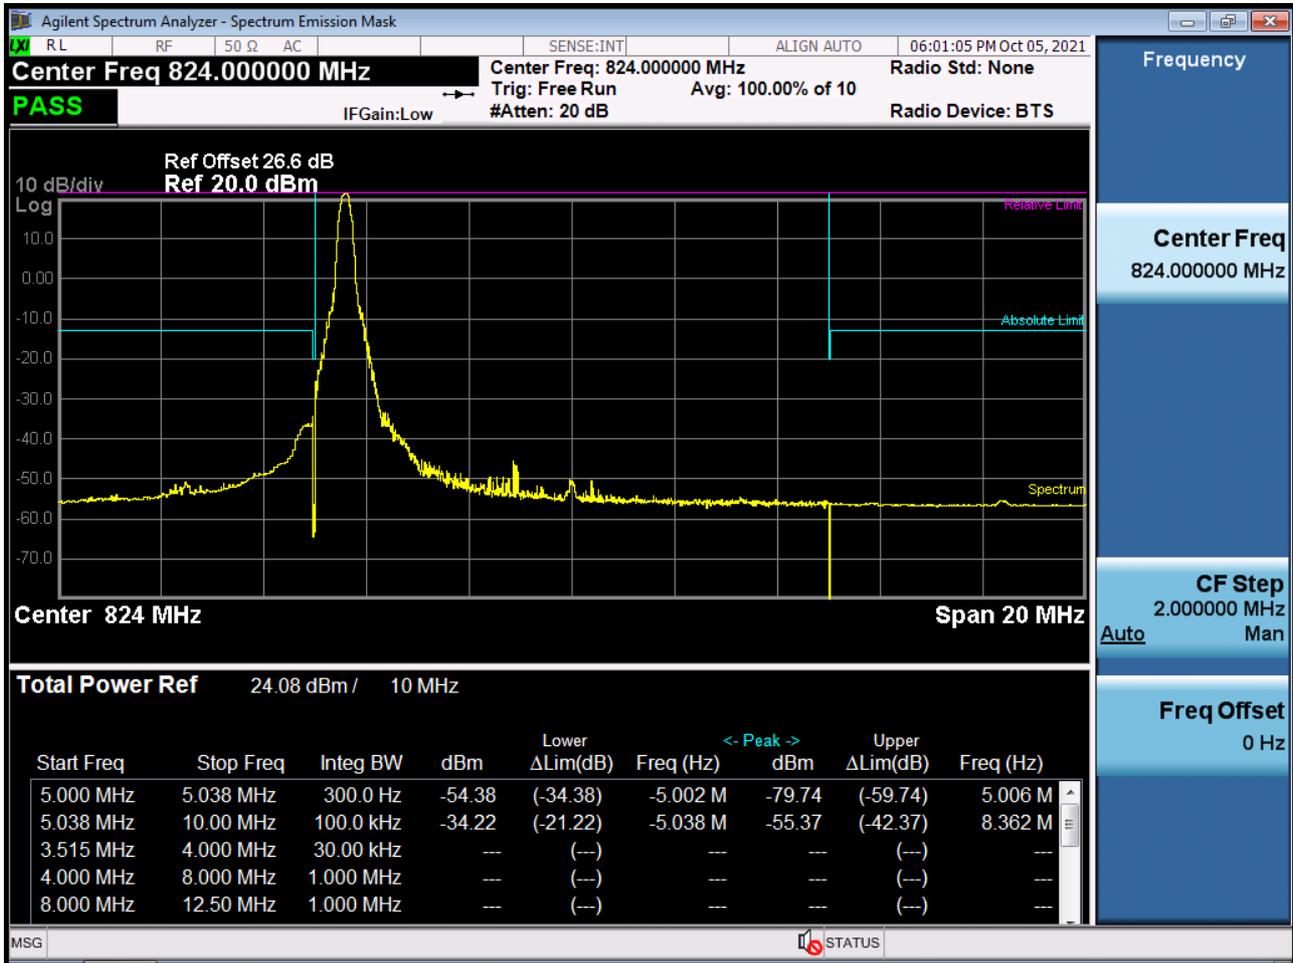


BAND 26. Channel Edge (10 MHz\_QPSK\_RB 1\_49)

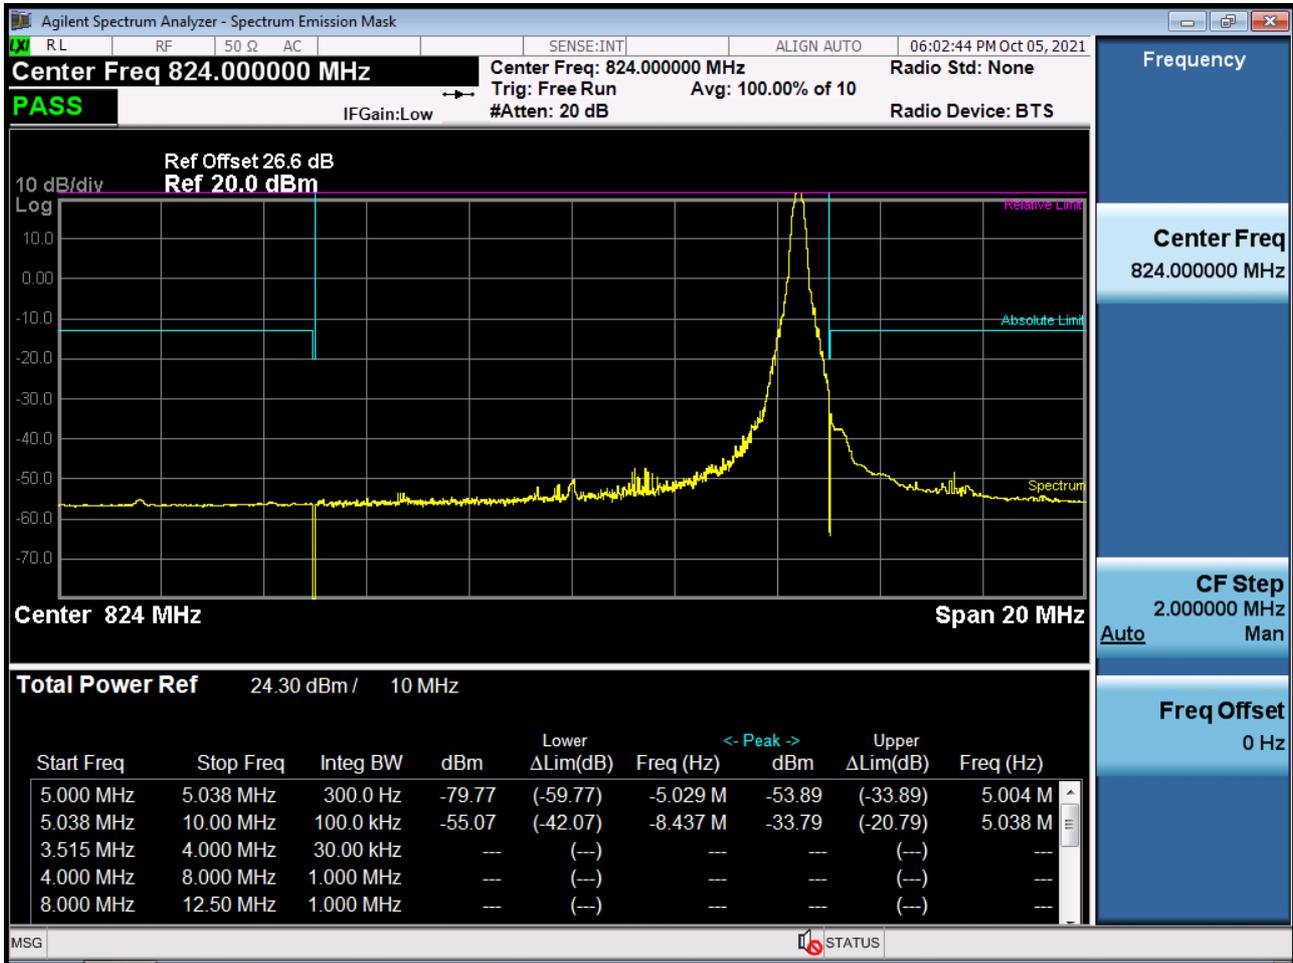


BAND 26. Channel Edge (10 MHz\_QPSK\_Full RB)

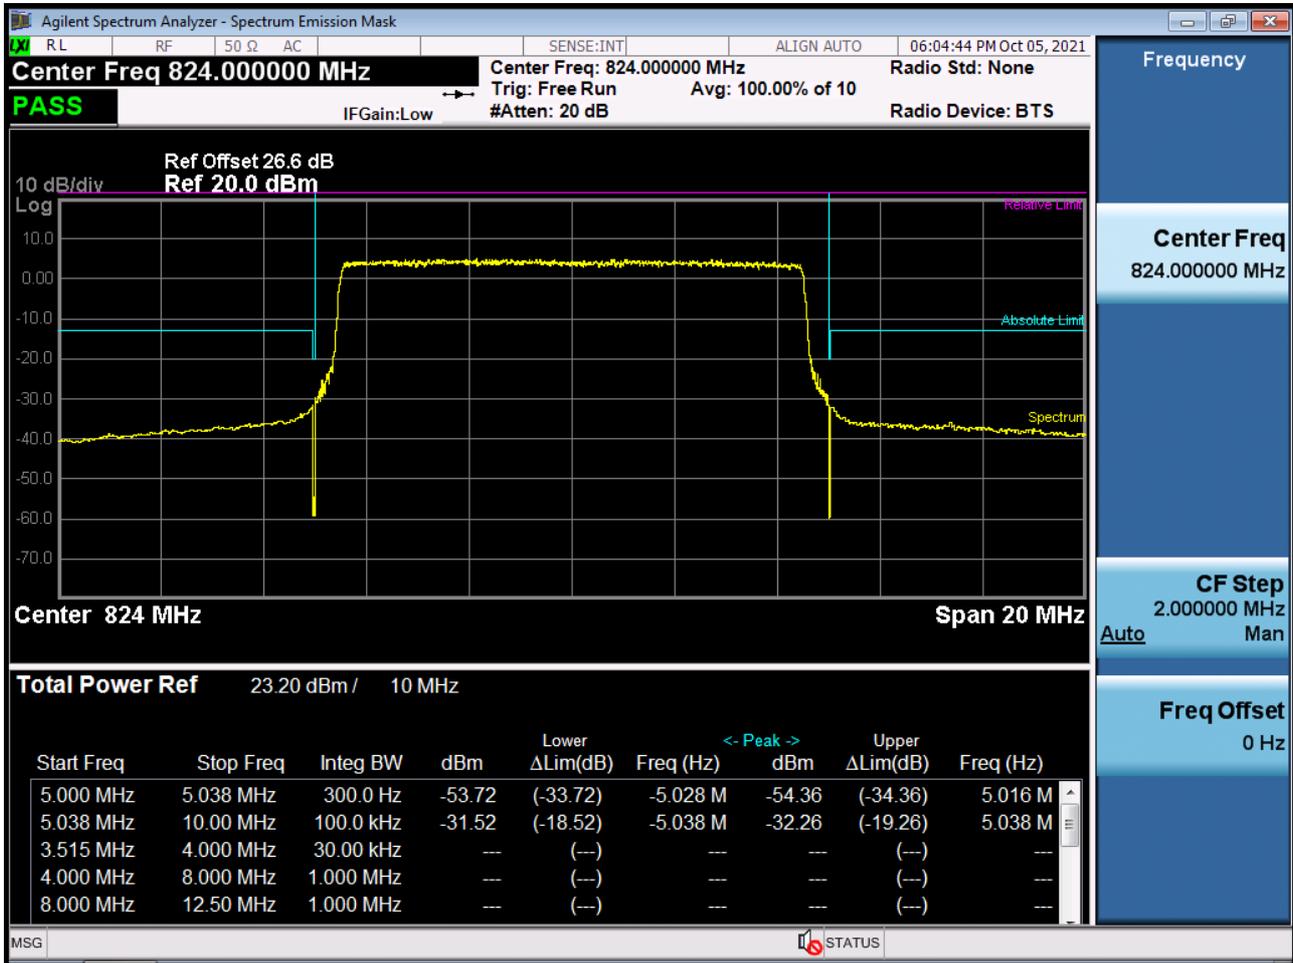

BAND 26. Band Edge (1.4 MHz\_QPSK\_RB 1\_5)

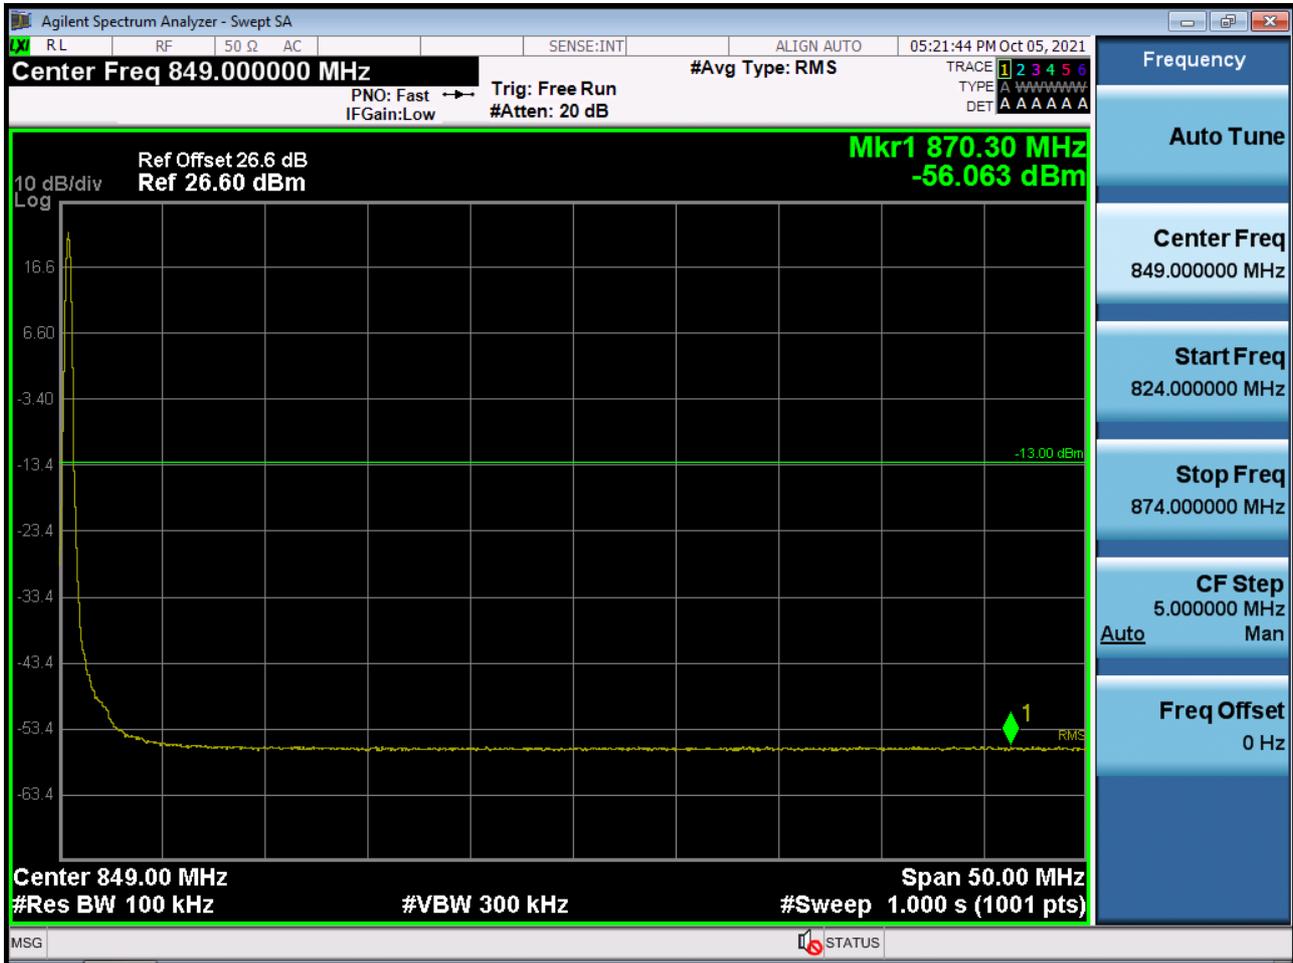

BAND 26. Band Edge (1.4 MHz\_QPSK\_FullIRB)

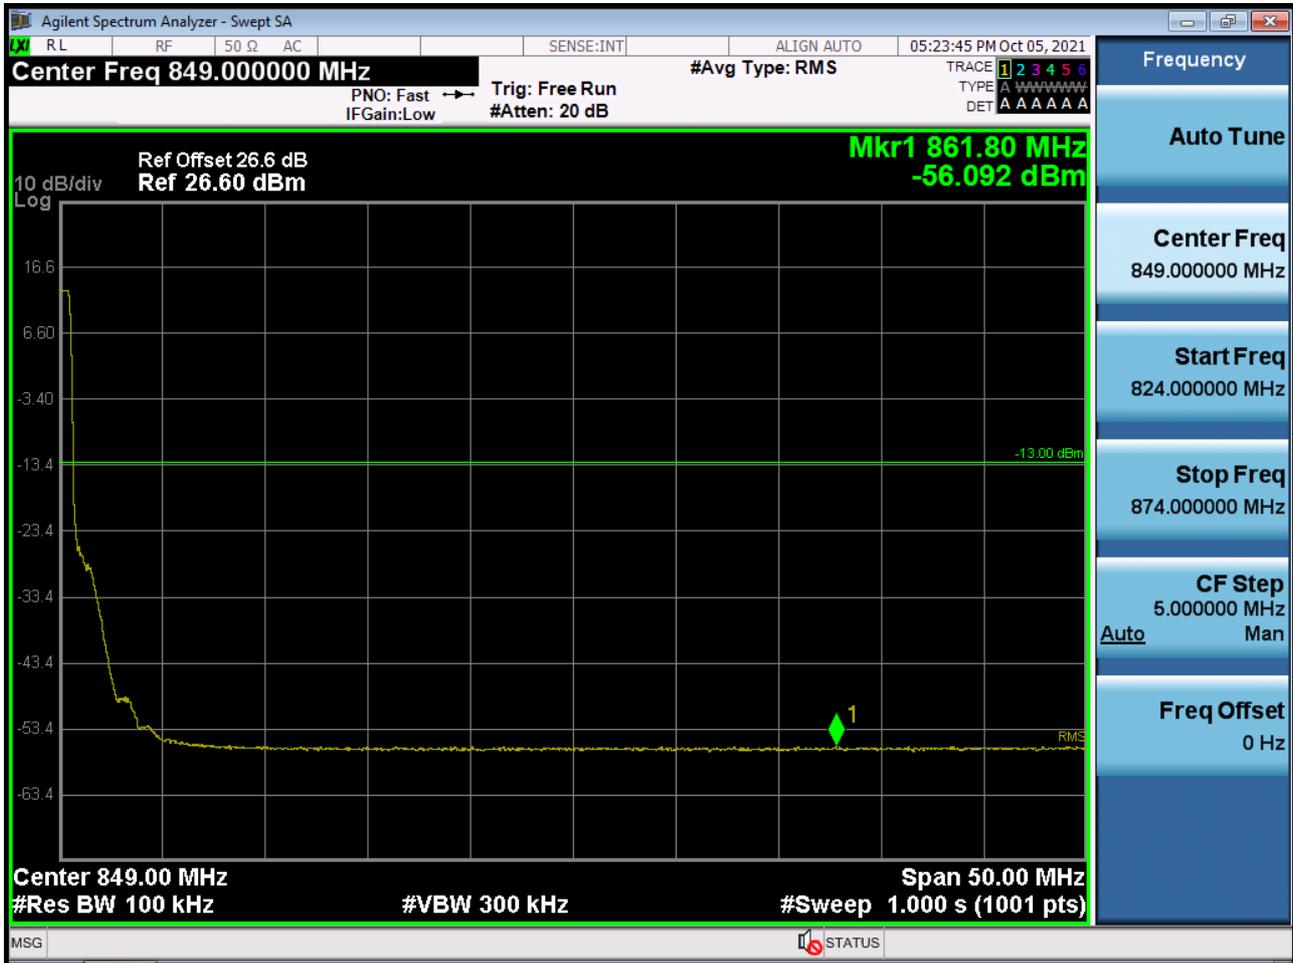

BAND 26. Band Edge (3 MHz\_QPSK\_RB 1\_14)



BAND 26. Band Edge (3 MHz\_QPSK\_ Full RB)







BAND 26. Band Edge (10 MHz\_QPSK\_RB 1\_49)



BAND 26. Band Edge (10 MHz\_QPSK\_ Full RB)



## 11 ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2111-FC078-P