

# FCC WPT REPORT

## Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Address:**  
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do,  
16677, Rep. of Korea

**Date of Issue:**  
December 09, 2021

**Test Site/Location:**  
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-  
si, Gyeonggi-do, 17383 KOREA

**Report No.:** HCT-RF-2111-FC032-R2

**FCC ID:** A3LSMX808U

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

**Model:** SM-X808U

**EUT Type:** Tablet

**Frequency of Operation  
& Max. Transmit Power:** 530 kHz(S-pen Charging) : 20.53 dBμV/m @30 m

**FCC Classification:** Part 15 Low Power Transmitter Below 1705 kHz (DCD)

**FCC Rule Part(s):** FCC Part 15, Subpart C (15.209)

### Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2111-FC032-R2

---

REVIEWED BY



---

Report prepared by : Woong Jin Kim  
Engineer of Telecommunication Testing Center



---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## Version

| TEST REPORT NO.      | DATE              | DESCRIPTION   |
|----------------------|-------------------|---|
| HCT-RF-2111-FC032    | November 24, 2021 | - First Approval Report                                     |
| HCT-RF-2111-FC032-R1 | December 07, 2021 | - Page 1, 5, Revised<br>- Page 16, Added Ant Pole & Revised |
| HCT-RF-2111-FC032-R2 | December 09, 2021 | - Page 16, Added Note                                       |

# Table of Contents

|  |    |
|--|----|
| REVIEWED BY .....                      | 2  |
| 1. EUT DESCRIPTION .....               | 5  |
| 2. TEST METHODOLOGY .....              | 6  |
| EUT CONFIGURATION .....                | 6  |
| EUT EXERCISE .....                     | 6  |
| GENERAL TEST PROCEDURES .....          | 6  |
| 3. INSTRUMENT CALIBRATION.....         | 7  |
| 4. FACILITIES AND ACCREDITATIONS ..... | 7  |
| FACILITIES .....                       | 7  |
| EQUIPMENT .....                        | 7  |
| 5. ANTENNA REQUIREMENTS .....          | 7  |
| 6. MEASUREMENT UNCERTAINTY .....       | 8  |
| 7. WORST CASE CONFIGURATION .....      | 9  |
| 8. TEST SUMMARY .....                  | 11 |
| 9. RADIATED EMISSION MEASUREMENT ..... | 12 |
| 10. POWERLINE CONDUCTED EMISSIONS..... | 19 |
| 11. LIST OF TEST EQUIPMENT .....       | 24 |
| 12. Annex A_TEST SETUP PHOTO .....     | 26 |

## 1. EUT DESCRIPTION

|                               |  |
|-------------------------------|--|
| <b>Model</b>                  | SM-X808U                                   |
| <b>Additional Model</b>       | -  |
| <b>EUT Type</b>               | Tablet                                     |
| <b>Power Supply</b>           | DC 3.86 V                                  |
| <b>Frequency of Operation</b> | 530 kHz (S-pen Charging / S-Pen : Rx Only) |
| <b>Max. Transmit Power</b>    | 20.53 dBμV/m @30 m (S-pen Charging)        |
| <b>Date(s) of Tests</b>       | September 13, 2021 ~ November 22, 2021     |
| <b>Serial number</b>          | Radiated: R32R9001J5L                      |

## 2. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Device (ANSI C63.10-2013) is used in the measurement of the test device.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.205, 15.207 and 15.209 under the FCC Rules Part 15 Subpart C.

### GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013).

### 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

### 4. FACILITIES AND ACCREDITATIONS

#### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

#### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5. ANTENNA REQUIREMENTS

#### According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter                                | Expanded Uncertainty (dB)                   |
|--|---|
| Conducted Disturbance (150 kHz ~ 30 MHz) | 1.82 ( Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (9 kHz ~ 30 MHz)    | 3.40 ( Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (30 MHz ~ 1 GHz)    | 4.80 ( Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (1 GHz ~ 18 GHz)    | 5.70 ( Confidence level about 95 %, $k=2$ ) |
| Radiated Disturbance (18 GHz ~ 40 GHz)   | 5.05 ( Confidence level about 95 %, $k=2$ ) |



## 7. WORST CASE CONFIGURATION

| Mode  | EUT State  | Position of Client device | Battery of Client device    | Client device             |
|---|--|---------------------------|-----------------------------|---------------------------|
| S-pen Charging<br>(attached on the back of EUT) | Charging from EUT to Client device                   | Aligned                   | Non-fully charged condition | S-pen<br>(530kHz Rx Only) |
|   | Charging from EUT(Charging from TA) to Client device |                           |                             |                           |

### Note:

1. Client device:

| S-pen(Rx Only)           |
|--------------------------|
| - Model : EJ-PT870       |
| - Manufacturer : SAMSUNG |
| - FCC ID : A3LEJPT870    |

2. All position of loop antenna were investigated and the worst position results are reported.

- Position : Horizontal, Vertical, Parallel to the ground plane
- Worst Position : Horizontal

3. The EUT was tested in three orthogonal axis(X, Y, Z) and the worst position results are reported.

- Axis : X, Y, Z
- Worst Axis : Z


### AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : EUT + External accessories(Earphone, Keyboard etc) + Travel Adapter + S-Pen(Client device),  
EUT + Travel Adapter + S-Pen(Client device)
- Worstcase : EUT + Travel Adapter + S-Pen(Client device)

**Test Setup Diagram:**

1. S-pen charging mode

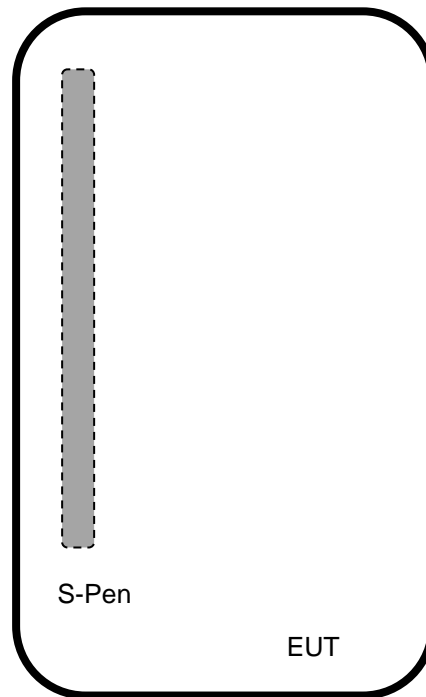

## 8. TEST SUMMARY

| Test Description                 | FCC Rule | Limit          | Condition | Result |
|----------------------------------|----------|----------------|-----------|--------|
| Radiated emission                | §15.209  | cf. Section 9  | Radiated  | Pass   |
| AC Power Line Conducted Emission | §15.207  | cf. Section 10 |           | Pass   |

**Note:**

1. For reporting purposes only.

## 9. RADIATED EMISSION MEASUREMENT

### Test Settings

1. Analyzer frequency set to the frequency of the radiated spurious emission of interest.
2. RBW :
  - 9 kHz – 150 kHz : 300 Hz
  - 150 kHz – 30 MHz : 10 kHz
  - 30 MHz – 1G Hz : 100 kHz
3. VBW :  $\geq 3 \times$  RBW
4. Sweep time : Auto couple
5. Detector : Peak
6. Trace : Maxhold
7. Trace was allowed to stabilize

### Limit


Except as provided elsewhere in this paragraph the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Rule Part   | Frequency (MHz) | Limit                       |
|-------------|-----------------|-----------------------------|
| Part 15.209 | 0.009 ~ 0.490   | 2400/F(kHz) $\mu$ V/m@300 m |
|             | 0.490 ~1.705    | 24000/F(kHz) $\mu$ V/m@30 m |
|             | 1.705 ~ 30      | 30 $\mu$ V/m@30 m           |
|             | 30 ~ 88         | 100 ** $\mu$ V/m@3 m        |
|             | 88 ~ 216        | 150 ** $\mu$ V/m@3 m        |
|             | 216 ~ 960       | 200 ** $\mu$ V/m@3 m        |
|             | Above 960       | 500 $\mu$ V/m@3 m           |


\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

### Test Set-up

Below 30 MHz

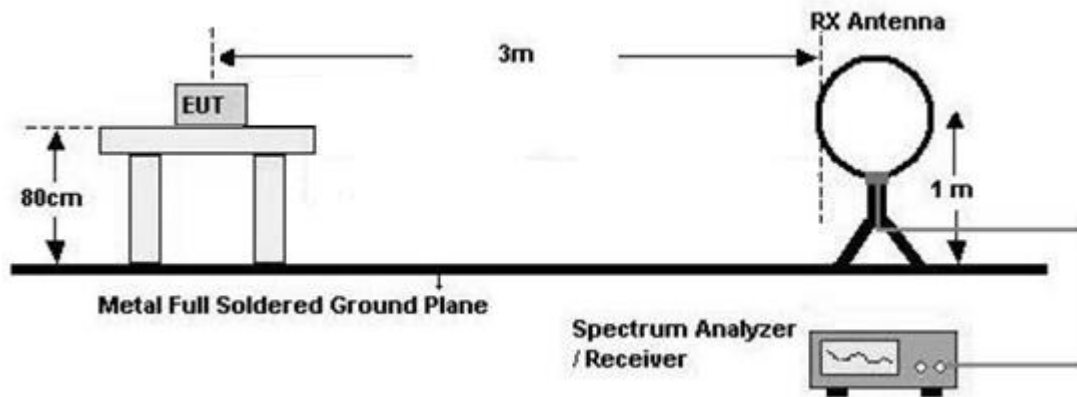

30 MHz - 1 GHz

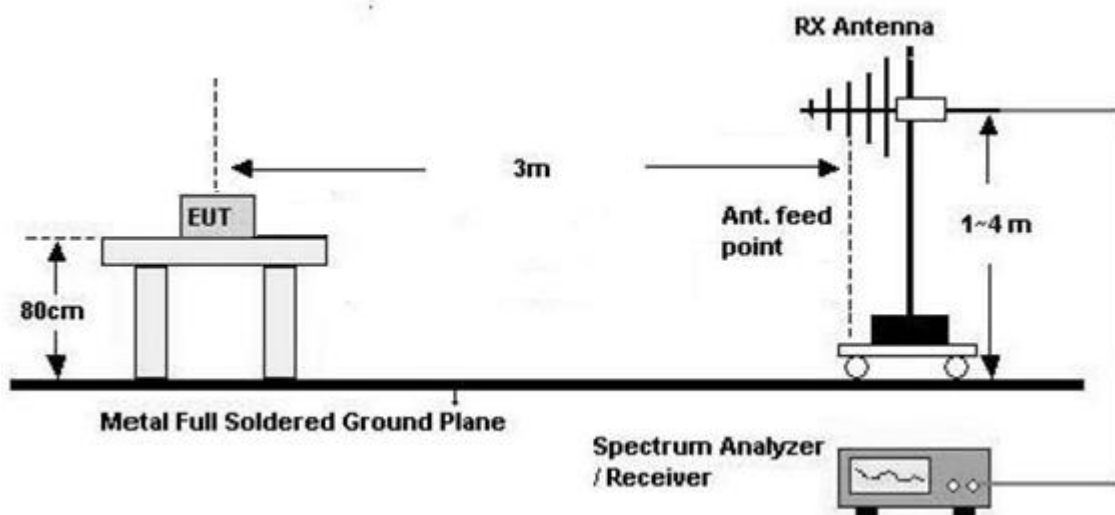

**Test Procedure of Radiated spurious emissions(Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT.
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The limit is converted from microvolts/meter to decibel microvolts/meter. Sample Calculation:
  - \* Result Value(dBμV/m@30 m)
  - = Measured Value(dBμV/m@3 m) + Ant factor(dB/m) + Cable Loss(dB)
  - Distance Correction Factor(dB)
6. Distance Correction
  - \* 0.009 MHz – 0.490 MHz :
  - $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
  - \* 0.490 MHz – 30 MHz :
  - $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
7. Plots were taken without using any correction factors.
8. The worst case plots are reported.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions(Below 1 GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq 3 \times$  RBW
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

### ■Test Result

| Frequency<br>[kHz] | Measured Value<br>[dBμV/m]<br>@3 m | Ant.<br>Pole | Ant.<br>Factor<br>[dB/m] | Cable<br>Loss<br>[dB] | Distance<br>Correction<br>[dB] | Result Value<br>[dBμV/m]<br>@300 m | Limit<br>[dBμV/m] | Margin<br>[dB] |
|--------------------|------------------------------------|--------------|--------------------------|-----------------------|--------------------------------|------------------------------------|-------------------|----------------|
| 19.010             | 34.803                             | H            | 19.10                    | 0.53                  | -80                            | -25.57                             | 42.02             | 67.59          |
| 114.30             | 15.069                             | H            | 19.30                    | 0.53                  | -80                            | -45.10                             | 26.44             | 71.54          |
| Frequency<br>[kHz] | Measured Value<br>[dBμV/m]<br>@3 m | Ant.<br>Pole | Ant.<br>Factor<br>[dB/m] | Cable<br>Loss<br>[dB] | Distance<br>Correction<br>[dB] | Result Value<br>[dBμV/m]<br>@30 m  | Limit<br>[dBμV/m] | Margin<br>[dB] |
| # 531.9            | 40.804                             | H            | 19.20                    | 0.53                  | -40                            | 20.53                              | 33.09             | 12.55          |
| 577.5              | 24.097                             | H            | 19.20                    | 0.53                  | -40                            | 3.83                               | 32.37             | 28.55          |
| 8022               | 16.414                             | H            | 19.56                    | 0.53                  | -40                            | -3.50                              | 29.54             | 33.04          |

### Note

1. “#” Fundamental Frequency
2. EUT Mode: Charging from EUT to S-pen
3. Position: Aligned
4. 30 MHz – 1GHz : No Critical peaks found

| Frequency<br>[kHz] | Measured Value<br>[dBμV/m]<br>@3 m | Ant.<br>Pole | Ant.<br>Factor<br>[dB/m] | Cable<br>Loss<br>[dB] | Distance<br>Correction<br>[dB] | Result Value<br>[dBμV/m]<br>@300 m | Limit<br>[dBμV/m] | Margin<br>[dB] |
|--------------------|------------------------------------|--------------|--------------------------|-----------------------|--------------------------------|------------------------------------|-------------------|----------------|
| 41.123             | 46.575                             | H            | 19.10                    | 0.53                  | -80                            | -13.80                             | 35.32             | 49.12          |
| 113.25             | 33.122                             | H            | 19.30                    | 0.53                  | -80                            | -27.05                             | 26.52             | 53.57          |
| 158.55             | 37.994                             | H            | 19.30                    | 0.53                  | -80                            | -22.18                             | 23.60             | 45.78          |
| Frequency<br>[kHz] | Measured Value<br>[dBμV/m]<br>@3 m | Ant.<br>Pole | Ant.<br>Factor<br>[dB/m] | Cable<br>Loss<br>[dB] | Distance<br>Correction<br>[dB] | Result Value<br>[dBμV/m]<br>@30 m  | Limit<br>[dBμV/m] | Margin<br>[dB] |
| # 531.9            | 39.653                             | H            | 19.20                    | 0.53                  | -40                            | 19.38                              | 33.09             | 13.70          |
| 8049               | 16.388                             | H            | 19.56                    | 0.53                  | -40                            | -3.52                              | 29.54             | 33.06          |

### Note

1. “#” Fundamental Frequency
2. EUT Mode: Charging from EUT(Charging from TA) to S-pen
3. Position: Aligned
4. 30 MHz – 1GHz : No Critical peaks found
5. 41.123 kHz is higher than fundamental level. However, it is noise floor level and looks like higher than due to chamber characteristic.



## ■ Test Plot


In order to simplify the report, the worst case results are reported.

### 1. S-pen Charging


#### Worst case

- EUT Mode: Charging from EUT to Client device(S-pen)
- Position: Aligned

Frequency Range : 9 kHz – 100kHz

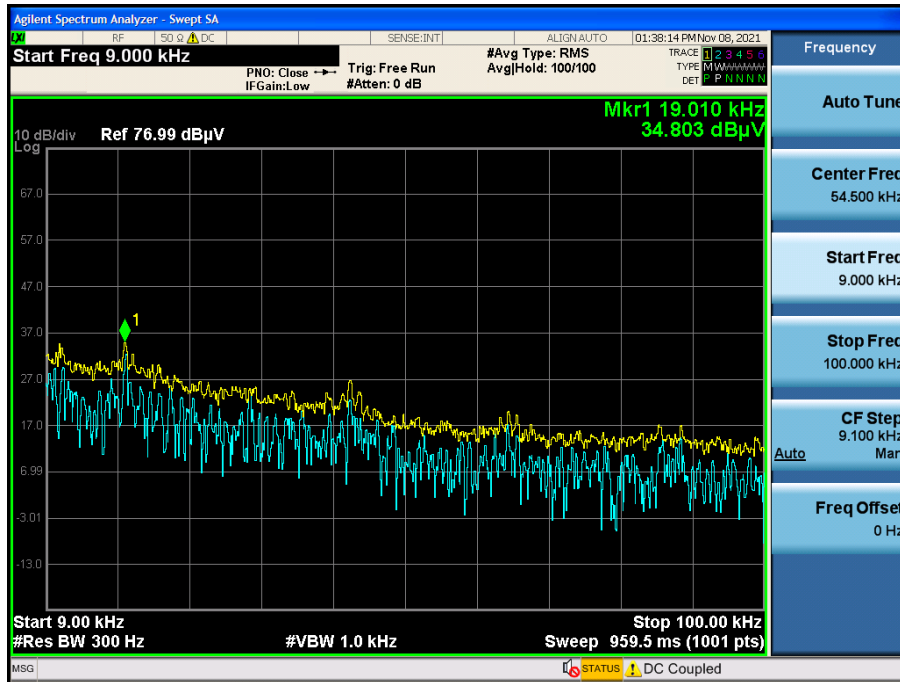

Frequency Range : 100 kHz – 150kHz

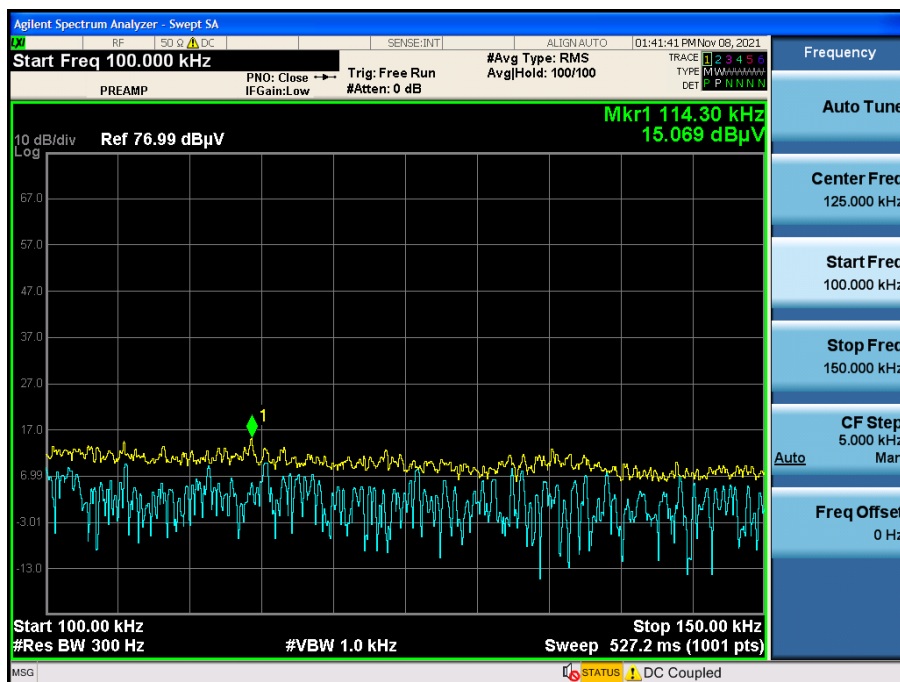



## 10. POWERLINE CONDUCTED EMISSIONS

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

| Frequency Range (MHz) | Limits (dB $\mu$ V)     |                         |
|-----------------------|-------------------------|-------------------------|
|                       | Quasi-peak              | Average                 |
| 0.15 to 0.50          | 66 to 56 <sup>(a)</sup> | 56 to 46 <sup>(a)</sup> |
| 0.50 to 5             | 56                      | 46                      |
| 5 to 30               | 60                      | 50                      |

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30 MHz.
  - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
  - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

### Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

**Test Result & Plot (Mode: S-pen Charging)**

**Conducted Emissions (Line 1)**

Test


1 / 2

**Test Report**

**Common Information**

EUT : SM-X808U  
 Manufacturer : SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions : S-PEN Charging Mode\_L1  
 Operator Name:  
 Comment:

Full Spectrum

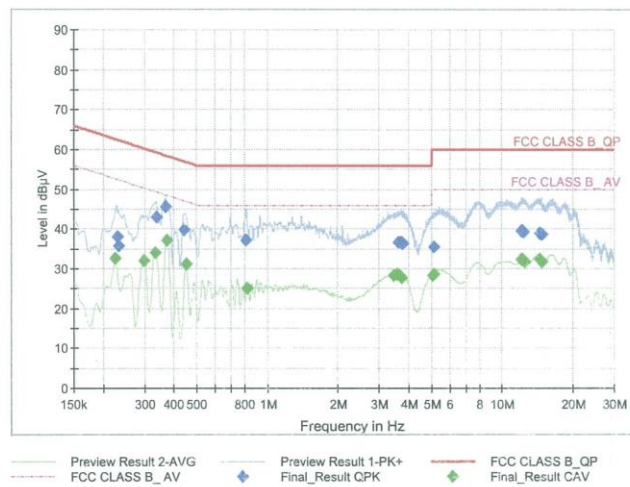

**Final Result\_QPK**

| Frequency (MHz) | QuasiPeak (dBµV) | Limit (dBµV) | Margin (dB) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|------------------|--------------|-------------|-----------------|------|--------|------------|
| 0.2288          | 38.05            | 62.50        | 24.44       | 9.000           | L1   | OFF    | 9.6        |
| 0.2333          | 35.90            | 62.33        | 26.44       | 9.000           | L1   | OFF    | 9.6        |
| 0.3368          | 43.03            | 59.28        | 16.26       | 9.000           | L1   | OFF    | 9.6        |
| 0.3683          | 45.51            | 58.54        | 13.03       | 9.000           | L1   | OFF    | 9.6        |
| 0.4425          | 39.78            | 57.02        | 17.23       | 9.000           | L1   | OFF    | 9.6        |
| 0.8128          | 37.13            | 56.00        | 18.87       | 9.000           | L1   | OFF    | 9.7        |
| 3.6163          | 36.66            | 56.00        | 19.34       | 9.000           | L1   | OFF    | 9.8        |
| 3.7018          | 36.49            | 56.00        | 19.51       | 9.000           | L1   | OFF    | 9.8        |
| 3.7220          | 36.68            | 56.00        | 19.32       | 9.000           | L1   | OFF    | 9.8        |
| 3.7333          | 36.64            | 56.00        | 19.36       | 9.000           | L1   | OFF    | 9.8        |
| 3.7895          | 36.20            | 56.00        | 19.80       | 9.000           | L1   | OFF    | 9.8        |
| 5.1305          | 35.43            | 60.00        | 24.57       | 9.000           | L1   | OFF    | 9.9        |
| 12.0830         | 39.57            | 60.00        | 20.43       | 9.000           | L1   | OFF    | 10.1       |
| 12.2518         | 39.63            | 60.00        | 20.38       | 9.000           | L1   | OFF    | 10.1       |
| 12.3283         | 39.35            | 60.00        | 20.65       | 9.000           | L1   | OFF    | 10.1       |
| 14.4860         | 39.02            | 60.00        | 20.98       | 9.000           | L1   | OFF    | 10.2       |
| 14.7110         | 38.67            | 60.00        | 21.33       | 9.000           | L1   | OFF    | 10.2       |
| 14.7538         | 38.62            | 60.00        | 21.38       | 9.000           | L1   | OFF    | 10.2       |

2021-11-13

오전 8:51:22

Test

2 / 2

**Final Result CAV**

| Frequency<br>(MHz) | CAverage<br>(dBuV) | Limit<br>(dBuV) | Margin<br>(dB) | Bandwidth<br>(kHz) | Line | Filter | Corr.<br>(dB) |
|--------------------|--------------------|-----------------|----------------|--------------------|------|--------|---------------|
| 0.2243             | 32.64              | 52.66           | 20.02          | 9.000              | L1   | OFF    | 9.6           |
| 0.2985             | 32.13              | 50.28           | 18.16          | 9.000              | L1   | OFF    | 9.6           |
| 0.3345             | 34.00              | 49.34           | 15.34          | 9.000              | L1   | OFF    | 9.6           |
| 0.3728             | 37.25              | 48.44           | 11.19          | 9.000              | L1   | OFF    | 9.6           |
| 0.4515             | 31.14              | 46.85           | 15.71          | 9.000              | L1   | OFF    | 9.6           |
| 0.8218             | 25.17              | 46.00           | 20.83          | 9.000              | L1   | OFF    | 9.7           |
| 3.4498             | 28.34              | 46.00           | 17.66          | 9.000              | L1   | OFF    | 9.8           |
| 3.5623             | 28.54              | 46.00           | 17.46          | 9.000              | L1   | OFF    | 9.8           |
| 3.6523             | 28.14              | 46.00           | 17.86          | 9.000              | L1   | OFF    | 9.8           |
| 3.7423             | 27.76              | 46.00           | 18.24          | 9.000              | L1   | OFF    | 9.8           |
| 5.0675             | 28.28              | 50.00           | 21.72          | 9.000              | L1   | OFF    | 9.9           |
| 5.1373             | 28.43              | 50.00           | 21.57          | 9.000              | L1   | OFF    | 9.9           |
| 12.1123            | 32.42              | 50.00           | 17.58          | 9.000              | L1   | OFF    | 10.1          |
| 12.1415            | 32.18              | 50.00           | 17.82          | 9.000              | L1   | OFF    | 10.1          |
| 12.2518            | 32.22              | 50.00           | 17.78          | 9.000              | L1   | OFF    | 10.1          |
| 12.4880            | 31.73              | 50.00           | 18.27          | 9.000              | L1   | OFF    | 10.1          |
| 14.4365            | 32.39              | 50.00           | 17.61          | 9.000              | L1   | OFF    | 10.2          |
| 14.7110            | 31.77              | 50.00           | 18.23          | 9.000              | L1   | OFF    | 10.2          |

2021-11-13

오전 8:51:22

## Conducted Emissions (Line 2)

Test


1 / 2

## Test Report

### Common Information

EUT : SM-X808U  
 Manufacturer : SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions : S-PEN Charging Mode\_N  
 Operator Name:  
 Comment:

Full Spectrum

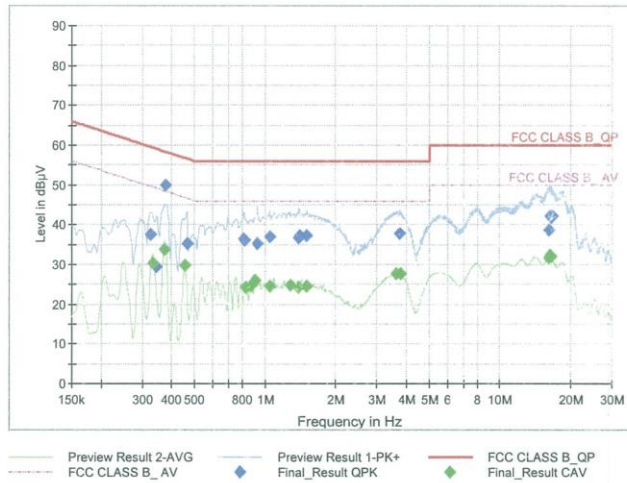

### Final Result\_QPK

| Frequency (MHz) | QuasiPeak (dBμV) | Limit (dBμV) | Margin (dB) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|------------------|--------------|-------------|-----------------|------|--------|------------|
| 0.3278          | 37.39            | 59.51        | 22.12       | 9.000           | N    | OFF    | 9.6        |
| 0.3458          | 29.51            | 59.06        | 29.56       | 9.000           | N    | OFF    | 9.6        |
| 0.3773          | 50.01            | 58.34        | 8.33        | 9.000           | N    | OFF    | 9.6        |
| 0.4650          | 35.28            | 56.60        | 21.32       | 9.000           | N    | OFF    | 9.6        |
| 0.8128          | 36.23            | 56.00        | 19.77       | 9.000           | N    | OFF    | 9.7        |
| 0.8173          | 36.15            | 56.00        | 19.85       | 9.000           | N    | OFF    | 9.7        |
| 0.9298          | 35.26            | 56.00        | 20.74       | 9.000           | N    | OFF    | 9.7        |
| 1.0468          | 37.05            | 56.00        | 18.95       | 9.000           | N    | OFF    | 9.7        |
| 1.3955          | 36.67            | 56.00        | 19.33       | 9.000           | N    | OFF    | 9.7        |
| 1.4000          | 37.09            | 56.00        | 18.91       | 9.000           | N    | OFF    | 9.7        |
| 1.5125          | 37.13            | 56.00        | 18.87       | 9.000           | N    | OFF    | 9.7        |
| 3.7288          | 37.85            | 56.00        | 18.15       | 9.000           | N    | OFF    | 9.8        |
| 16.2343         | 38.63            | 60.00        | 21.37       | 9.000           | N    | OFF    | 10.3       |
| 16.2703         | 42.15            | 60.00        | 17.85       | 9.000           | N    | OFF    | 10.3       |
| 16.3738         | 42.22            | 60.00        | 17.78       | 9.000           | N    | OFF    | 10.3       |
| 16.4773         | 41.95            | 60.00        | 18.05       | 9.000           | N    | OFF    | 10.3       |
| 16.5043         | 42.10            | 60.00        | 17.90       | 9.000           | N    | OFF    | 10.3       |
| 16.6685         | 42.01            | 60.00        | 17.99       | 9.000           | N    | OFF    | 10.3       |

2021-11-13

오전 8:43:05

Test

2 / 2

### Final Result CAV

| Frequency<br>(MHz) | CAverage<br>(dBμV) | Limit<br>(dBμV) | Margin<br>(dB) | Bandwidth<br>(kHz) | Line | Filter | Corr.<br>(dB) |
|--------------------|--------------------|-----------------|----------------|--------------------|------|--------|---------------|
| 0.3323             | 30.37              | 49.40           | 19.03          | 9.000              | N    | OFF    | 9.6           |
| 0.3750             | 33.82              | 48.39           | 14.57          | 9.000              | N    | OFF    | 9.6           |
| 0.4560             | 29.78              | 46.77           | 16.98          | 9.000              | N    | OFF    | 9.6           |
| 0.8285             | 24.27              | 46.00           | 21.73          | 9.000              | N    | OFF    | 9.7           |
| 0.8690             | 24.66              | 46.00           | 21.34          | 9.000              | N    | OFF    | 9.7           |
| 0.9118             | 25.88              | 46.00           | 20.12          | 9.000              | N    | OFF    | 9.7           |
| 1.0468             | 24.54              | 46.00           | 21.46          | 9.000              | N    | OFF    | 9.7           |
| 1.2808             | 24.85              | 46.00           | 21.15          | 9.000              | N    | OFF    | 9.7           |
| 1.3933             | 24.15              | 46.00           | 21.85          | 9.000              | N    | OFF    | 9.7           |
| 1.5125             | 24.38              | 46.00           | 21.62          | 9.000              | N    | OFF    | 9.7           |
| 3.6253             | 27.62              | 46.00           | 18.38          | 9.000              | N    | OFF    | 9.8           |
| 3.8075             | 27.59              | 46.00           | 18.41          | 9.000              | N    | OFF    | 9.8           |
| 16.1083            | 31.78              | 50.00           | 18.22          | 9.000              | N    | OFF    | 10.3          |
| 16.1308            | 31.85              | 50.00           | 18.15          | 9.000              | N    | OFF    | 10.3          |
| 16.3288            | 32.20              | 50.00           | 17.80          | 9.000              | N    | OFF    | 10.3          |
| 16.3625            | 32.41              | 50.00           | 17.59          | 9.000              | N    | OFF    | 10.3          |
| 16.3738            | 32.25              | 50.00           | 17.75          | 9.000              | N    | OFF    | 10.3          |
| 16.4863            | 32.16              | 50.00           | 17.84          | 9.000              | N    | OFF    | 10.3          |

2021-11-13

오전 8:43:05

## 11. LIST OF TEST EQUIPMENT

### Conducted Test

| Equipment                                    | Model   | Manufacturer    | Serial No. | Due to Calibration | Calibration Interval |
|--|---------|-----------------|------------|--------------------|----------------------|
| LISN   | ENV216  | Rohde & Schwarz | 102245     | 08/23/2022         | Annual               |
| EMI Test Receiver                            | ESR     | Rohde & Schwarz | 101910     | 06/17/2022         | Annual               |
| Temperature Chamber                          | SU-642  | ESPAC           | 0093008124 | 03/15/2022         | Annual               |
| Signal Analyzer                              | N9030A  | Agilent         | MY49431210 | 01/11/2022         | Annual               |
| Power Measurement Set                        | OSP 120 | Rohde & Schwarz | 101231     | 07/02/2022         | Annual               |
| Power Meter                                  | N1911A  | Agilent         | MY45100523 | 04/08/2022         | Annual               |
| Power Sensor                                 | N1921A  | Keysight        | MY57820067 | 04/08/2022         | Annual               |
| Directional Coupler                          | 87300B  | Agilent         | 3116A03621 | 11/02/2022         | Annual               |
| Power Splitter                               | 11667B  | Hewlett Packard | 05001      | 05/20/2022         | Annual               |
| DC Power Supply                              | E3632A  | Hewlett Packard | MY50360067 | 02/16/2022         | Annual               |
| Attenuator(10 dB)                            | 8493C   | Hewlett Packard | 07560      | 06/18/2022         | Annual               |
| Software                                     | EMC32   | Rohde & Schwarz | N/A        | N/A                | N/A                  |
| FCC WLAN&BT&BLE Conducted Test Software v3.0 | N/A     | HCT CO., LTD.   | N/A        | N/A                | N/A                  |

### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.



**Radiated Test**

| Equipment                | Model            | Manufacturer    | Serial No. | Due to Calibration | Calibration Interval |
|--------------------------|------------------|-----------------|------------|--------------------|----------------------|
| Controller(Antenna mast) | CO3000           | Innco system    | CO3000-4p  | N/A                | N/A                  |
| Antenna Position Tower   | MA4640/800-XP-EP | Innco system    | N/A        | N/A                | N/A                  |
| Controller               | EM1000           | Audix           | 060520     | N/A                | N/A                  |
| Turn Table               | N/A              | Audix           | N/A        | N/A                | N/A                  |
| Loop Antenna             | FMZB 1513        | Rohde & Schwarz | 1513-333   | 03/19/2022         | Biennial             |
| Hybrid Antenna           | VULB 9168        | Schwarzbeck     | 760        | 02/22/2023         | Biennial             |
| Spectrum Analyzer        | FSV40-N          | Rohde & Schwarz | 102168     | 07/05/2022         | Annual               |
| Signal Analyzer          | N9030A           | Agilent         | MY49431210 | 01/11/2022         | Annual               |
| Attenuator (3 dB)        | 18B-03           | Api tech.       | 1          | 02/03/2022         | Annual               |
| Attenuator(10 dB)        | 8493C-10         | Agilent         | 08285      | 02/03/2022         | Annual               |

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

## 12. Annex A\_TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

| No. | Description         |
|-----|---------------------|
| 1   | HCT-RF-2111-FC032-P |