

FCC Carrier Aggregation REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
December 08, 2021

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2111-FC057-R2

FCC ID: A3LSMX808U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-X808U
 EUT Type: Tablet
 FCC Classification: PCS Licensed Transmitter (PCB)
 FCC Rule Part(s): §27, §2

Mode (PCC+SCC)	Tx Frequency (MHz)	Modulation	Emission Designator	EIRP	
				Max. Power (dBm)	Max. Power (W)
5 MHz + 20 MHz (PC2)	2499.3 - 2680.0	QPSK	23M0G7D	0.398	26.00
		16QAM	22M8W7D	0.283	24.52
		64QAM	22M9W7D	0.159	22.02
		256QAM	22M9W7D	0.123	20.89
10 MHz + 15 MHz (PC2)	2501.3 - 2682.5	QPSK	23M2G7D	0.401	26.03
		16QAM	23M1W7D	0.313	24.95
		64QAM	23M1W7D	0.169	22.29
		256QAM	23M2W7D	0.126	21.00
10 MHz + 20 MHz (PC2)	2501.5 - 2680.0	QPSK	27M7G7D	0.414	26.17
		16QAM	27M7W7D	0.298	24.74
		64QAM	27M7W7D	0.162	22.09
		256QAM	27M7W7D	0.124	20.92
15 MHz + 10 MHz (PC2)	2503.5 - 2684.7	QPSK	23M1G7D	0.399	26.01
		16QAM	23M1W7D	0.308	24.88
		64QAM	23M2W7D	0.161	22.06
		256QAM	23M2W7D	0.129	21.12
15 MHz + 15 MHz (PC2)	2503.5 - 2682.5	QPSK	28M4G7D	0.385	25.86
		16QAM	28M4W7D	0.308	24.88
		64QAM	28M3W7D	0.156	21.92
		256QAM	28M4W7D	0.123	20.91
15 MHz + 20 MHz (PC2)	2503.8 - 2680.0	QPSK	32M7G7D	0.397	25.99
		16QAM	32M7W7D	0.291	24.64
		64QAM	32M6W7D	0.154	21.87
		256QAM	32M6W7D	0.126	20.99
20 MHz + 5 MHz (PC2)	2506.0 - 2686.7	QPSK	23M0G7D	0.473	26.75
		16QAM	22M9W7D	0.390	25.91
		64QAM	23M0W7D	0.216	23.35
		256QAM	22M9W7D	0.173	22.37
20 MHz + 10 MHz (PC2)	2506.0 - 2684.5	QPSK	27M8G7D	0.462	26.65
		16QAM	27M8W7D	0.361	25.58
		64QAM	27M9W7D	0.186	22.70
		256QAM	27M8W7D	0.145	21.60

20 MHz + 15 MHz (PC2)	2506.0 - 2682.2	QPSK	32M7G7D	0.460	26.63
		16QAM	32M7W7D	0.356	25.51
		64QAM	32M7W7D	0.304	24.83
		256QAM	32M7W7D	0.200	23.02
20 MHz + 20 MHz (PC2)	2506.0 - 2680.0	QPSK	37M6G7D	0.442	26.45
		16QAM	37M6W7D	0.345	25.38
		64QAM	37M6W7D	0.251	23.99
		256QAM	37M7W7D	0.146	21.65

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.
The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2111-FC057	November 24, 2021	- First Approval Report
HCT-RF-2111-FC057-R1	December 07, 2021	- Added the note on page 24 - Added the table on page 24 - Revised the data of conducted spurious emissions - Revised the frequency of SCC on page 78
HCT-RF-2111-FC057-R2	December 08, 2021	- Revised the PLOT of conducted spurious emissions & Channel edge

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	3
1. GENERAL INFORMATION	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT.....	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE	8
3.2 RADIATED POWER.....	9
3.3 RADIATED SPURIOUS EMISSIONS	10
3.4 PEAK- TO- AVERAGE RATIO.....	11
3.5 OCCUPIED BANDWIDTH.....	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	14
3.7 CHANNEL EDGE.....	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	17
4. LIST OF TEST EQUIPMENT	18
5. MEASUREMENT UNCERTAINTY	19
6. SUMMARY OF TEST RESULTS	20
7. SAMPLE CALCULATION	21
8. TEST DATA	23
8.1 Conducted Power.....	26
8.1.1 PC2.....	26
8.2 Equivalent Isotropic Radiated Power.....	29
8.2.1 PC2.....	29
8.3 Conducted Spurious Emissions.....	32
8.3.1 PC2.....	32
8.4 Channel Edge.....	51
8.4.1 PC2.....	51
8.5 Frequency Stability / Variation Of Ambient Temperature	64
8.5.1 PC2.....	64
8.6 Radiated Spurious Emissions.....	72
8.6.1 PC2.....	72
8.7 Occupied Bandwidth.....	75
8.7.1 PC2.....	75
8.8 Peak- to- Average Ratio	81
8.8.1 PC2.....	81
9. ANNEX A_ TEST SETUP PHOTO	87

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMX808U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§27, §2
EUT Type:	Tablet
Model(s):	SM-X808U
Tx Frequency:	2499.3 - 2680.0: 5 MHz+20 MHz 2501.3 - 2682.5: 10 MHz+15 MHz 2501.5 - 2680.0: 10 MHz+20 MHz 2503.5 - 2684.7: 15 MHz+10 MHz 2503.5 - 2682.5: 15 MHz+15 MHz 2503.8 - 2680.0: 15 MHz+20 MHz 2506.0 - 2686.7: 20 MHz+5 MHz 2506.0 - 2684.5: 20 MHz+10 MHz 2506.0 - 2682.2: 20 MHz+15 MHz 2506.0 - 2680.0: 20 MHz+20 MHz
Date(s) of Tests:	September 17, 2021 ~ November 16, 2021
Serial number:	Radiated: R32R9001N1N Conducted: R32R9001H5N
LTE CA :	CA 41C(Uplink)

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Tablet with UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160), WIFI 6E, Bluetooth, BT LE, WPT, mmWave(n260/261).

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points > 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result } (\text{dBm}) = \text{Pg } (\text{dBm}) - \text{cable loss } (\text{dB}) + \text{antenna gain } (\text{dBi})$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP } (\text{dBm}) = \text{ERP } (\text{dBm}) + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

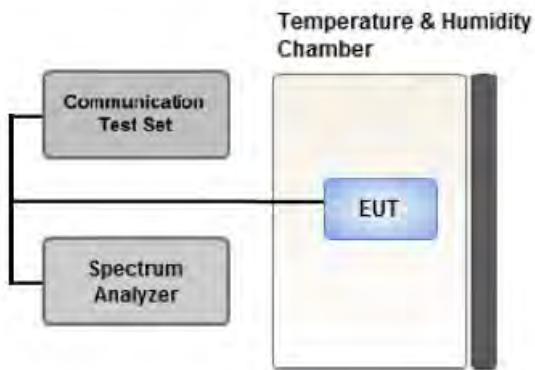

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R \text{ (dB)} = P_{Pk} \text{ (dBm)} - P_{Avg} \text{ (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep
(automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

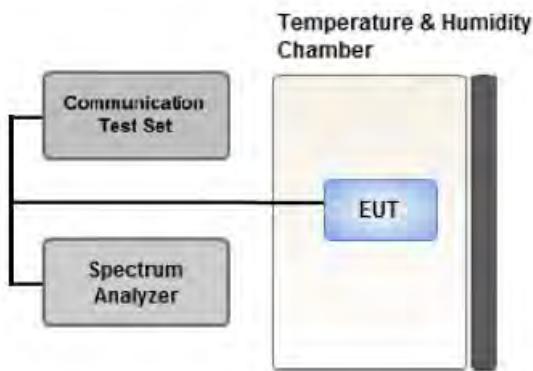

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

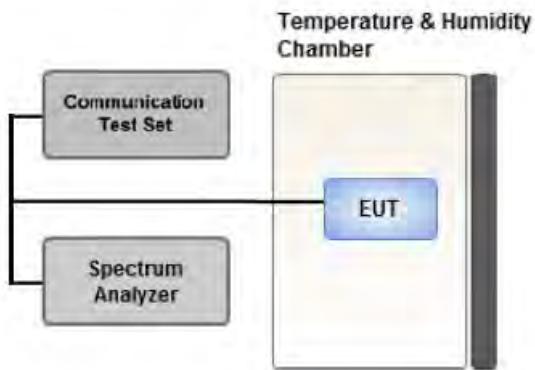

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 CHANNEL EDGE

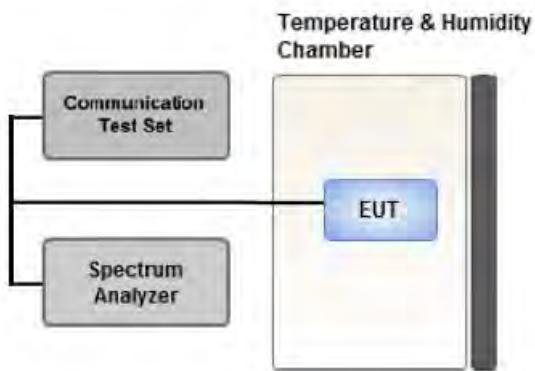

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1 MHz of the channel edge the RBW should be 2 % of EBW, then 1 MHz after that.
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

1. The attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge,
2. $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge.
3. $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge.
4. The attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz.
5. $55 + 10 \log (P)$ dB at or below 2490.5 MHz.
6. X is the greater of 6 MHz or the actual emission bandwidth
7. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

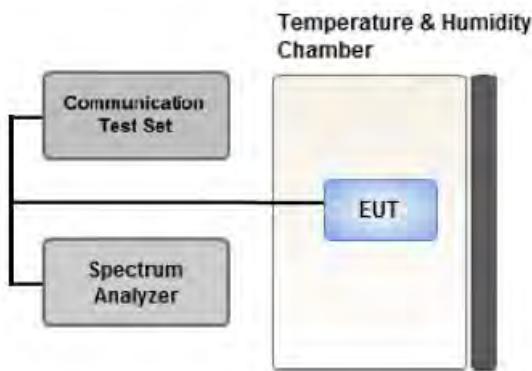

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	03/02/2022	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	03/02/2022	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	04/07/2022	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/28/2022	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/15/2022	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2022	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	02/11/2022	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/18/2022	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	09/29/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/19/2022	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/12/2022	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/07/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(m)(4)	<ul style="list-style-type: none"> ■ $< 40 + 10\log_{10} (P[\text{Watts}])$ at Channel edges ■ $< 43 + 10\log_{10} (P[\text{Watts}])$ between 5 and X MHz from Channel edges ■ $< 55 + 10\log_{10} (P[\text{Watts}])$ beyond X MHz beyond from Channel edges ■ $< 43 + 10 \log (P) \text{ dB}$ on all frequencies between 2490.5 MHz and 2496 MHz 	PASS
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(h)(2)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(m)(4)	< 55 + 10log10 (P[Watts])	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator**GSM Emission Designator****Emission Designator = 249KGXW**

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator**Emission Designator = 249KG7W**

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator**Emission Designator = 4M17F9W**

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

Test Overview

The EUT is set up to transmit two contiguous LTE channels. The power level of both carriers and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Note

1. All tests were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth.
2. Channel bandwidth is shown in the tables below based only on the channel bandwidths that were supported in this device.

Channel Bandwidth (PCC)	Channel Bandwidth (SCC)	Maximum aggregated bandwidth (MHz)
5	20	25
10	15	25
10	20	30
15	10	25
15	15	30
15	20	35
20	5	25
20	10	30
20	15	35
20	20	40

3. All modes of operation were investigated and the worst case configuration results are reported in this section.

Please refer to the table below.

- Worst case(Conducted Spurious Emissions, Channel Edge)

: We have selected higher of the Conduction Output Power.

- Worst case(Radiated Spurious Emissions) : We have selected higher of the EIRP.

- Worst case(OBW, PAR, Frequency stability)

: All modes of operation were investigated and the worst case configuration results are reported.

4. All power classes were tested, and the results were reported for the worst case PC2.

5. All 3 channels(low/mid/high) of conducted power and radiated power were investigated

and the worst case channel results are reported.

[Worst case _PC2]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
Conducted Spurious Emissions/ Channel Edge	QPSK	Low	20	2506.0	39750	1	99	10	2520.4	39894	1	0
	QPSK	Mid	20	2585.6	40546	1	99	15	2602.7	40717	1	0
	QPSK	High	10	2665.6	41346	1	49	20	2680.0	41490	1	0
	QPSK	Low	20	2506.0	39750	1	0	10	2520.4	39894	1	49
	QPSK	Mid	20	2585.6	40546	1	0	15	2602.7	40717	1	74
	QPSK	High	10	2665.6	41346	1	0	20	2680.0	41490	1	99
	QPSK	Low	20	2506.0	39750	100	0	20	2525.8	39948	100	0
	QPSK	Mid	20	2585.6	40546	100	0	15	2602.7	40717	75	0
	QPSK	High	5	2668.3	41373	25	0	20	2680.0	41490	100	0
Radiated Spurious Emissions	QPSK	Low	20	2506.0	39750	1	99	5	2517.7	39867	1	0
	QPSK	Mid	20	2585.6	40546	1	99	15	2602.7	40717	1	0
	QPSK	High	20	2660.2	41292	1	99	20	2680.0	41490	1	0

[Worst case _PC2]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
OBW, PAR	QPSK, 16QAM, 64QAM 256QAM	Mid	5	2583.8	40528	25	0	20	2595.5	40645	100	0
			10	2585.9	40549	50	0	15	2597.9	40669	75	0
			10	2583.6	40526	50	0	20	2598.0	40670	100	0
			15	2588.1	40571	75	0	10	2600.1	40691	50	0
			15	2585.5	40545	75	0	15	2600.5	40695	75	0
			15	2583.3	40523	75	0	20	2600.4	40694	100	0
			20	2590.5	40595	100	0	5	2602.2	40712	25	0
			20	2588.1	40571	100	0	10	2602.5	40715	50	0
			20	2585.6	40546	100	0	15	2602.7	40717	75	0
			20	2583.1	40521	100	0	20	2602.9	40719	100	0
Frequency stability	QPSK	Low	5	2499.3	39683	25	0	20	2511.0	39800	100	0
			10	2501.5	39705	50	0	20	2515.9	39849	100	0
			15	2503.8	39728	75	0	20	2520.9	39899	100	0
			20	2506.0	39750	100	0	20	2525.8	39948	100	0
		High	5	2668.3	41373	25	0	20	2680.0	41490	100	0
			10	2665.6	41346	50	0	20	2680.0	41490	100	0
			15	2662.9	41319	75	0	20	2680.0	41490	100	0
			20	2660.2	41292	100	0	20	2680.0	41490	100	0

8.1 Conducted Power

8.1.1 PC2

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	2499.3	39683	1	24	20	2511.0	39800	1	0	26.33
	10	2501.3	39703	1	49	15	2513.3	39823	1	0	26.02
	10	2501.5	39705	1	49	20	2515.9	39849	1	0	26.21
	15	2503.5	39725	1	74	10	2515.5	39845	1	0	25.70
	15	2503.5	39725	1	74	15	2518.5	39875	1	0	26.25
	15	2503.8	39728	1	74	20	2520.9	39899	1	0	26.06
	20	2506.0	39750	1	99	5	2517.7	39867	1	0	26.35
	20	2506.0	39750	1	99	10	2520.4	39894	1	0	26.51
	20	2506.0	39750	1	99	15	2523.1	39921	1	0	26.21
	20	2506.0	39750	1	99	20	2525.8	39948	1	0	26.14
Mid	5	2583.8	40528	1	24	20	2595.5	40645	1	0	26.76
	10	2585.9	40549	1	49	15	2597.9	40669	1	0	26.92
	10	2583.6	40526	1	49	20	2598.0	40670	1	0	27.05
	15	2588.1	40571	1	74	10	2600.1	40691	1	0	27.13
	15	2585.5	40545	1	74	15	2600.5	40695	1	0	27.18
	15	2583.3	40523	1	74	20	2600.4	40694	1	0	27.17
	20	2590.5	40595	1	99	5	2602.2	40712	1	0	27.16
	20	2588.1	40571	1	99	10	2602.5	40715	1	0	27.03
	20	2585.6	40546	1	99	15	2602.7	40717	1	0	27.19
	20	2583.1	40521	1	99	20	2602.9	40719	1	0	27.16
High	5	2668.3	41373	1	24	20	2680.0	41490	1	0	26.35
	10	2670.5	41395	1	49	15	2682.5	41515	1	0	26.03
	10	2665.6	41346	1	49	20	2680.0	41490	1	0	26.51
	15	2672.7	41417	1	74	10	2684.7	41537	1	0	26.16
	15	2667.5	41365	1	74	15	2682.5	41515	1	0	26.03
	15	2662.9	41319	1	74	20	2680.0	41490	1	0	26.45
	20	2675.0	41440	1	99	5	2686.7	41557	1	0	26.34
	20	2670.1	41391	1	99	10	2684.5	41535	1	0	26.23
	20	2665.1	41341	1	99	15	2682.2	41512	1	0	26.16
	20	2660.2	41292	1	99	20	2680.0	41490	1	0	26.45

Note:

Modulation : QPSK(1RB)

Operating frequency	PCC					SCC					Conducted Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	2499.3	39683	25	0	20	2511.0	39800	100	0	24.23
	10	2501.3	39703	50	0	15	2513.3	39823	75	0	24.03
	10	2501.5	39705	50	0	20	2515.9	39849	100	0	24.18
	15	2503.5	39725	75	0	10	2515.5	39845	50	0	24.20
	15	2503.5	39725	75	0	15	2518.5	39875	75	0	24.15
	15	2503.8	39728	75	0	20	2520.9	39899	100	0	24.28
	20	2506.0	39750	100	0	5	2517.7	39867	25	0	24.02
	20	2506.0	39750	100	0	10	2520.4	39894	50	0	24.16
	20	2506.0	39750	100	0	15	2523.1	39921	75	0	24.26
	20	2506.0	39750	100	0	20	2525.8	39948	100	0	24.28
Mid	5	2583.8	40528	25	0	20	2595.5	40645	100	0	25.10
	10	2585.9	40549	50	0	15	2597.9	40669	75	0	25.22
	10	2583.6	40526	50	0	20	2598.0	40670	100	0	25.09
	15	2588.1	40571	75	0	10	2600.1	40691	50	0	25.23
	15	2585.5	40545	75	0	15	2600.5	40695	75	0	25.19
	15	2583.3	40523	75	0	20	2600.4	40694	100	0	25.10
	20	2590.5	40595	100	0	5	2602.2	40712	25	0	25.18
	20	2588.1	40571	100	0	10	2602.5	40715	50	0	25.28
	20	2585.6	40546	100	0	15	2602.7	40717	75	0	25.35
	20	2583.1	40521	100	0	20	2602.9	40719	100	0	25.12
High	5	2668.3	41373	25	0	20	2680.0	41490	100	0	24.82
	10	2670.5	41395	50	0	15	2682.5	41515	75	0	24.79
	10	2665.6	41346	50	0	20	2680.0	41490	100	0	24.78
	15	2672.7	41417	75	0	10	2684.7	41537	50	0	24.53
	15	2667.5	41365	75	0	15	2682.5	41515	75	0	24.81
	15	2662.9	41319	75	0	20	2680.0	41490	100	0	24.78
	20	2675.0	41440	100	0	5	2686.7	41557	25	0	24.30
	20	2670.1	41391	100	0	10	2684.5	41535	50	0	24.73
	20	2665.1	41341	100	0	15	2682.2	41512	75	0	24.74
	20	2660.2	41292	100	0	20	2680.0	41490	100	0	24.80

Note:

Modulation : QPSK(Full RB)

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	20	2506.0	39750	1	99	10	2520.4	39894	1	0	25.55
Mid	20	2585.6	40546	1	99	15	2602.7	40717	1	0	26.48
High	10	2665.6	41346	1	49	20	2680.0	41490	1	0	26.05
Low	20	2506.0	39750	100	0	20	2517.7	39948	100	0	23.51
Mid	20	2506.0	40546	100	0	15	2520.4	40717	75	0	24.44
High	5	2506.0	41373	25	0	20	2523.1	41490	100	0	23.65

Note:

Modulation : 16QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	20	2506.0	39750	1	99	10	2520.4	39894	1	0	23.77
Mid	20	2585.6	40546	1	99	15	2602.7	40717	1	0	24.51
High	10	2665.6	41346	1	49	20	2680.0	41490	1	0	24.03
Low	20	2583.6	39750	100	0	20	2598.0	39948	100	0	22.89
Mid	20	2588.1	40546	100	0	15	2600.1	40717	75	0	24.21
High	5	2585.5	41373	25	0	20	2600.5	41490	100	0	23.51

Note:

Modulation : 64QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	20	2506.0	39750	1	99	10	2520.4	39894	1	0	21.54
Mid	20	2585.6	40546	1	99	15	2602.7	40717	1	0	22.44
High	10	2665.6	41346	1	49	20	2680.0	41490	1	0	21.86
Low	20	2583.6	39750	100	0	20	2602.7	39948	100	0	20.86
Mid	20	2588.1	40546	100	0	15	2602.9	40717	75	0	22.17
High	5	2668.3	41373	25	0	20	2680.0	41490	100	0	21.51

Note:

Modulation : 256QAM

8.2 Equivalent Isotropic Radiated Power

8.2.1 PC2

	PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L.	Pol.	E.I.R.P	
	BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
Low	5	39683	25/0	20	39800	100/0	-19.65	17.31	10.70	2.50	H	0.356	25.51
	10	39703	50/0	15	39823	75/0	-19.39	17.63	10.70	2.50	H	0.383	25.83
	10	39705	50/0	20	39849	100/0	-19.25	17.77	10.70	2.50	H	0.395	25.97
	15	39725	75/0	10	39845	50/0	-19.31	17.71	10.70	2.50	H	0.390	25.91
	15	39725	75/0	15	39875	75/0	-19.44	17.58	10.70	2.50	H	0.378	25.78
	15	39728	75/0	20	39899	100/0	-19.31	17.71	10.70	2.50	H	0.390	25.91
	20	39750	100/0	5	39867	25/0	-18.47	18.55	10.70	2.50	H	0.473	26.75
	20	39750	100/0	10	39894	50/0	-18.57	18.45	10.70	2.50	H	0.462	26.65
	20	39750	100/0	15	39921	75/0	-18.60	18.43	10.70	2.50	H	0.460	26.63
	20	39750	100/0	20	39948	100/0	-18.78	18.25	10.70	2.50	H	0.442	26.45
Mid	5	40528	25/0	20	40645	100/0	-19.54	17.78	10.62	2.53	H	0.386	25.87
	10	40549	50/0	15	40669	75/0	-19.38	17.94	10.62	2.53	H	0.401	26.03
	10	40526	50/0	20	40670	100/0	-19.24	18.08	10.62	2.53	H	0.414	26.17
	15	40571	75/0	10	40691	50/0	-19.30	17.94	10.61	2.54	H	0.399	26.01
	15	40545	75/0	15	40695	75/0	-19.57	17.75	10.62	2.53	H	0.384	25.84
	15	40523	75/0	20	40694	100/0	-19.42	17.90	10.62	2.53	H	0.397	25.99
	20	40595	100/0	5	40712	25/0	-19.53	17.71	10.61	2.54	H	0.378	25.78
	20	40571	100/0	10	40715	50/0	-19.34	17.90	10.61	2.54	H	0.395	25.97
	20	40546	100/0	15	40717	75/0	-19.19	18.05	10.61	2.54	H	0.409	26.12
	20	40521	100/0	20	40719	100/0	-19.37	17.95	10.62	2.53	H	0.402	26.04
High	5	41373	25/0	20	41490	100/0	-19.70	17.82	10.75	2.57	H	0.398	26.00
	10	41395	50/0	15	41515	75/0	-19.75	17.77	10.75	2.57	H	0.394	25.95
	10	41346	50/0	20	41490	100/0	-19.74	17.60	10.74	2.57	H	0.378	25.77
	15	41417	75/0	10	41537	50/0	-20.13	17.56	10.76	2.57	H	0.376	25.75
	15	41365	75/0	15	41515	75/0	-19.84	17.68	10.75	2.57	H	0.386	25.86
	15	41319	75/0	20	41490	100/0	-19.64	17.70	10.74	2.57	H	0.386	25.87
	20	41440	100/0	5	41557	25/0	-20.02	17.67	10.76	2.57	H	0.386	25.86
	20	41391	100/0	10	41535	50/0	-20.14	17.55	10.76	2.57	H	0.375	25.74
	20	41341	100/0	15	41512	75/0	-19.84	17.50	10.74	2.57	H	0.369	25.67
	20	41292	100/0	20	41490	100/0	-19.47	17.87	10.74	2.57	H	0.402	26.04

Note:

1. Modulation : QPSK

2. Limit : < 2 Watts

PCC			SCC			Measured	Substitute	Ant.	C.L.	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
5	39683	25/0	20	39800	100/0	-20.64	16.32	10.70	2.50	H	0.283	24.52
10	39703	50/0	15	39823	75/0	-20.27	16.75	10.70	2.50	H	0.313	24.95
10	39705	50/0	20	39849	100/0	-20.48	16.54	10.70	2.50	H	0.298	24.74
15	39725	75/0	10	39845	50/0	-20.34	16.68	10.70	2.50	H	0.308	24.88
15	39725	75/0	15	39875	75/0	-20.34	16.68	10.70	2.50	H	0.308	24.88
15	39728	75/0	20	39899	100/0	-20.58	16.44	10.70	2.50	H	0.291	24.64
20	39750	100/0	5	39867	25/0	-19.31	17.71	10.70	2.50	H	0.390	25.91
20	39750	100/0	10	39894	50/0	-19.64	17.38	10.70	2.50	H	0.361	25.58
20	39750	100/0	15	39921	75/0	-19.77	17.26	10.70	2.50	H	0.352	25.46
20	39750	100/0	20	39948	100/0	-19.85	17.18	10.70	2.50	H	0.345	25.38
20	40546	100/0	15	40717	75/0	-19.80	17.44	10.61	2.54	H	0.356	25.51
20	41292	100/0	20	41490	100/0	-20.78	16.56	10.74	2.57	H	0.297	24.73

Note:

1. Modulation : 16QAM
2. Limit : < 2 Watts

PCC			SCC			Measured	Substitute	Ant.	C.L.	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
5	39683	25/0	20	39800	100/0	-23.14	13.82	10.70	2.50	H	0.159	22.02
10	39703	50/0	15	39823	75/0	-22.93	14.09	10.70	2.50	H	0.169	22.29
10	39705	50/0	20	39849	100/0	-23.13	13.89	10.70	2.50	H	0.162	22.09
15	39725	75/0	10	39845	50/0	-23.16	13.86	10.70	2.50	H	0.161	22.06
15	39725	75/0	15	39875	75/0	-23.30	13.72	10.70	2.50	H	0.156	21.92
15	39728	75/0	20	39899	100/0	-23.35	13.67	10.70	2.50	H	0.154	21.87
20	39750	100/0	5	39867	25/0	-21.87	15.15	10.70	2.50	H	0.216	23.35
20	39750	100/0	10	39894	50/0	-22.52	14.50	10.70	2.50	H	0.186	22.70
20	39750	100/0	15	39921	75/0	-22.46	14.57	10.70	2.50	H	0.189	22.77
20	39750	100/0	20	39948	100/0	-22.58	14.45	10.70	2.50	H	0.184	22.65
20	40546	100/0	15	40717	75/0	-20.48	16.76	10.61	2.54	H	0.304	24.83
20	41292	100/0	20	41490	100/0	-21.52	15.82	10.74	2.57	H	0.251	23.99

Note:

1. Modulation : 64QAM
2. Limit : < 2 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L.	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/ Offset	BW [MHz]	Channel	RB/ Offset						W	dBm
5	39683	25/0	20	39800	100/0	-24.27	12.69	10.70	2.50	H	0.123	20.89
10	39703	50/0	15	39823	75/0	-24.22	12.80	10.70	2.50	H	0.126	21.00
10	39705	50/0	20	39849	100/0	-24.30	12.72	10.70	2.50	H	0.124	20.92
15	39725	75/0	10	39845	50/0	-24.10	12.92	10.70	2.50	H	0.129	21.12
15	39725	75/0	15	39875	75/0	-24.31	12.71	10.70	2.50	H	0.123	20.91
15	39728	75/0	20	39899	100/0	-24.23	12.79	10.70	2.50	H	0.126	20.99
20	39750	100/0	5	39867	25/0	-22.85	14.17	10.70	2.50	H	0.173	22.37
20	39750	100/0	10	39894	50/0	-23.62	13.40	10.70	2.50	H	0.145	21.60
20	39750	100/0	15	39921	75/0	-23.39	13.64	10.70	2.50	H	0.153	21.84
20	39750	100/0	20	39948	100/0	-23.58	13.45	10.70	2.50	H	0.146	21.65
20	40546	100/0	15	40717	75/0	-22.29	14.95	10.61	2.54	H	0.200	23.02
20	41292	100/0	20	41490	100/0	-24.27	13.07	10.74	2.57	H	0.133	21.24

Note:

1. Modulation : 256QAM

2. Limit : < 2 Watts

8.3 Conducted Spurious Emissions

8.3.1 PC2

Operating frequency	PCC				SCC				Measurement Maximum Frequency (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)
	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset				
Low	20	39750	2506	1/99	10	39894	2520.4	1/0	7.3500	28.591	-60.10	-31.51
Mid	20	40546	2585.6	1/99	15	40717	2602.7	1/0	6.0010	28.591	-60.39	-31.80
High	10	41346	2665.6	1/49	20	41490	2680	1/0	7.7602	28.591	-60.70	-32.11
Low	20	39750	2506	1/0	10	39894	2520.4	1/49	5.2089	28.591	-60.38	-31.79
Mid	20	40546	2585.6	1/0	15	40717	2602.7	1/74	6.0125	28.591	-60.15	-31.56
High	10	41346	2665.6	1/0	20	41490	2680	1/99	4.3021	27.976	-60.03	-32.06
Low	20	39750	2506	100/0	20	39948	2525.8	100/0	7.9666	28.591	-60.49	-31.90
Mid	20	40546	2585.6	100/0	15	40717	2602.7	75/0	3.8660	27.976	-60.75	-32.77
High	5	41373	2668.3	25/0	20	41490	2680	100/0	7.9866	28.591	-60.52	-31.93

Note:


1. Modulation : QPSK
2. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter
3. Factors for frequency :

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


4. Limit : -25.0 dBm

Frequency Range : 30 MHz ~ 10 GHz


PCC 5 MHz Ch41373 RB25 Offset0 SCC 20 MHz Ch41490 RB100 Offset0

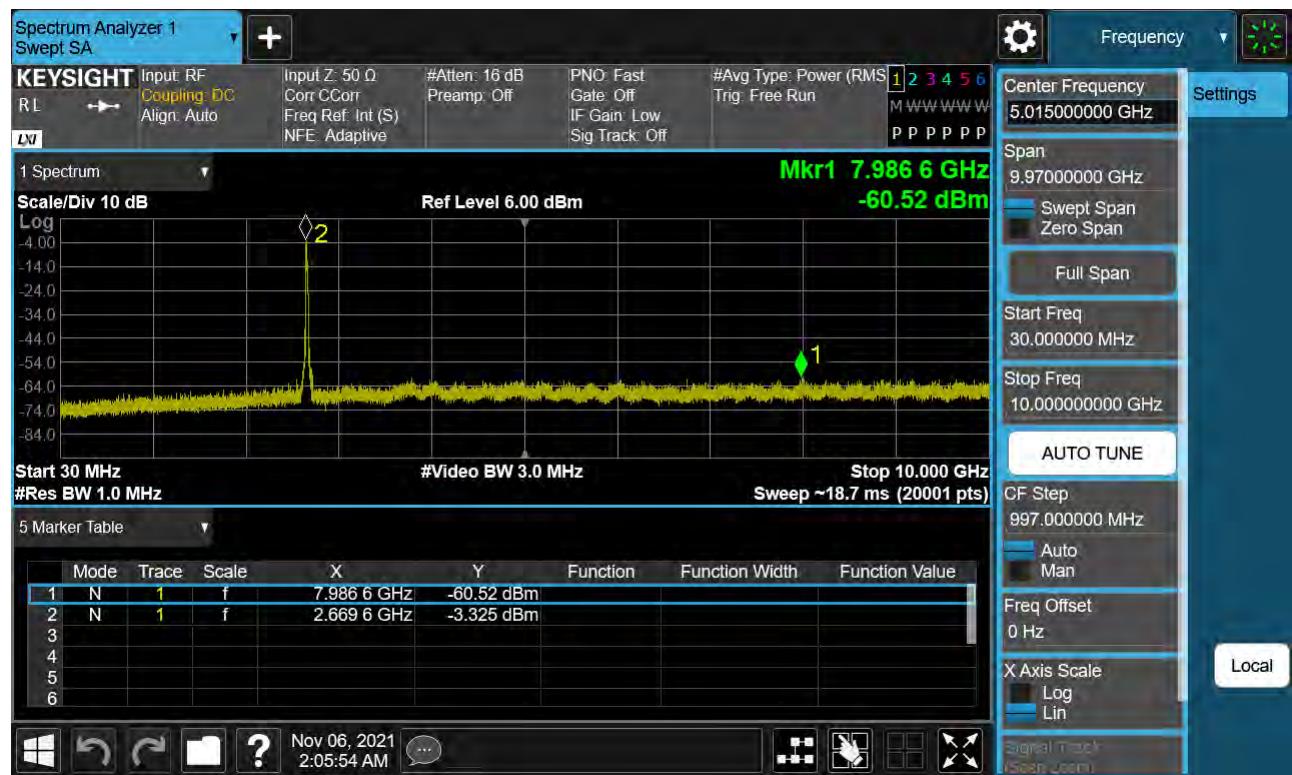


PCC 10 MHz Ch41346 RB1 Offset0 SCC 20 MHz Ch41490 RB1 Offset99

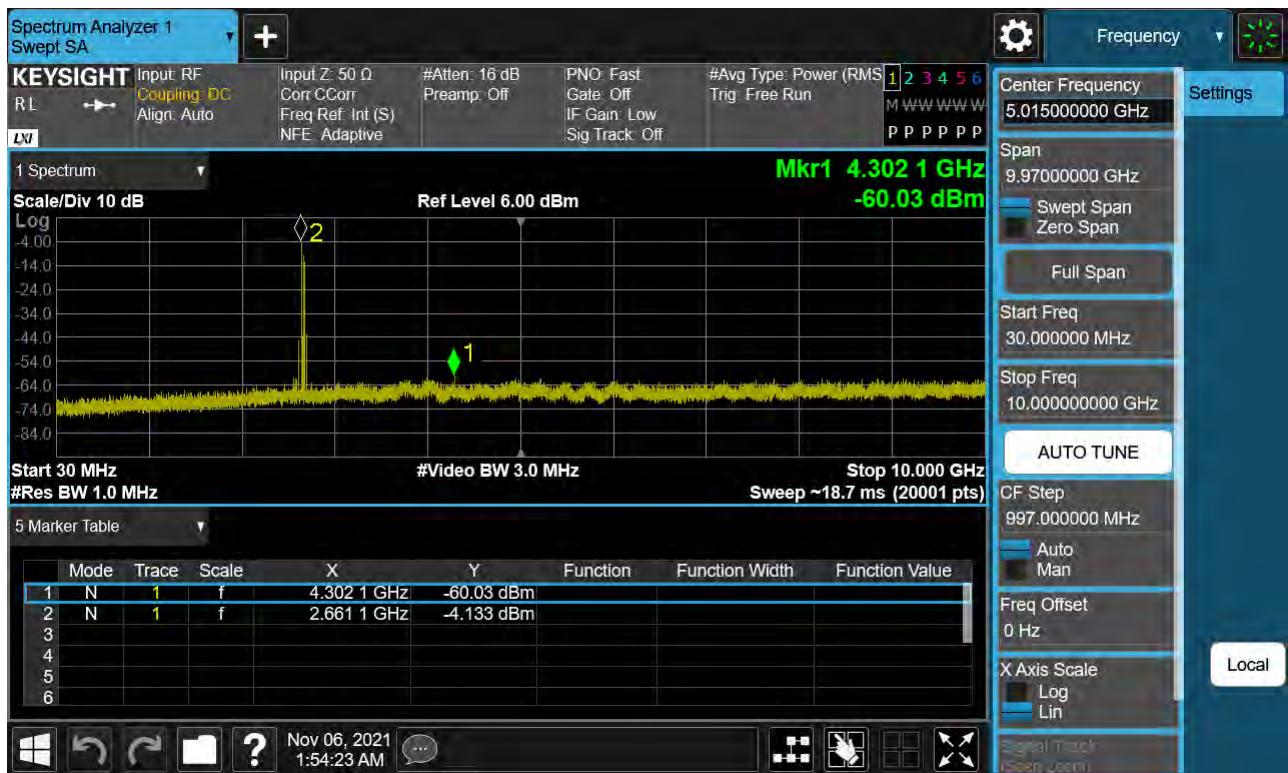


PCC 10 MHz Ch41346 RB1 Offset49 SCC 20 MHz Ch41490 RB1 Offset0

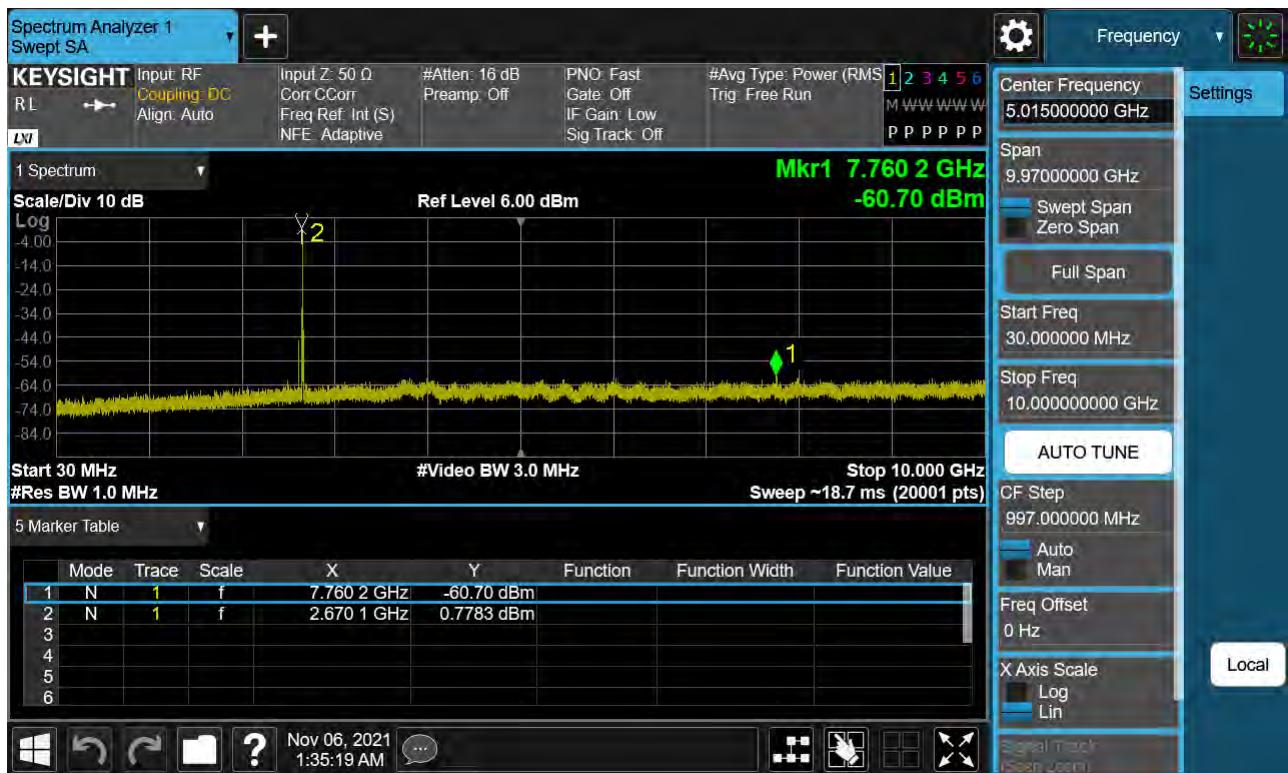


PCC 20 MHz Ch39750 RB1 Offset0 SCC 10 MHz Ch39894 RB1 Offset49

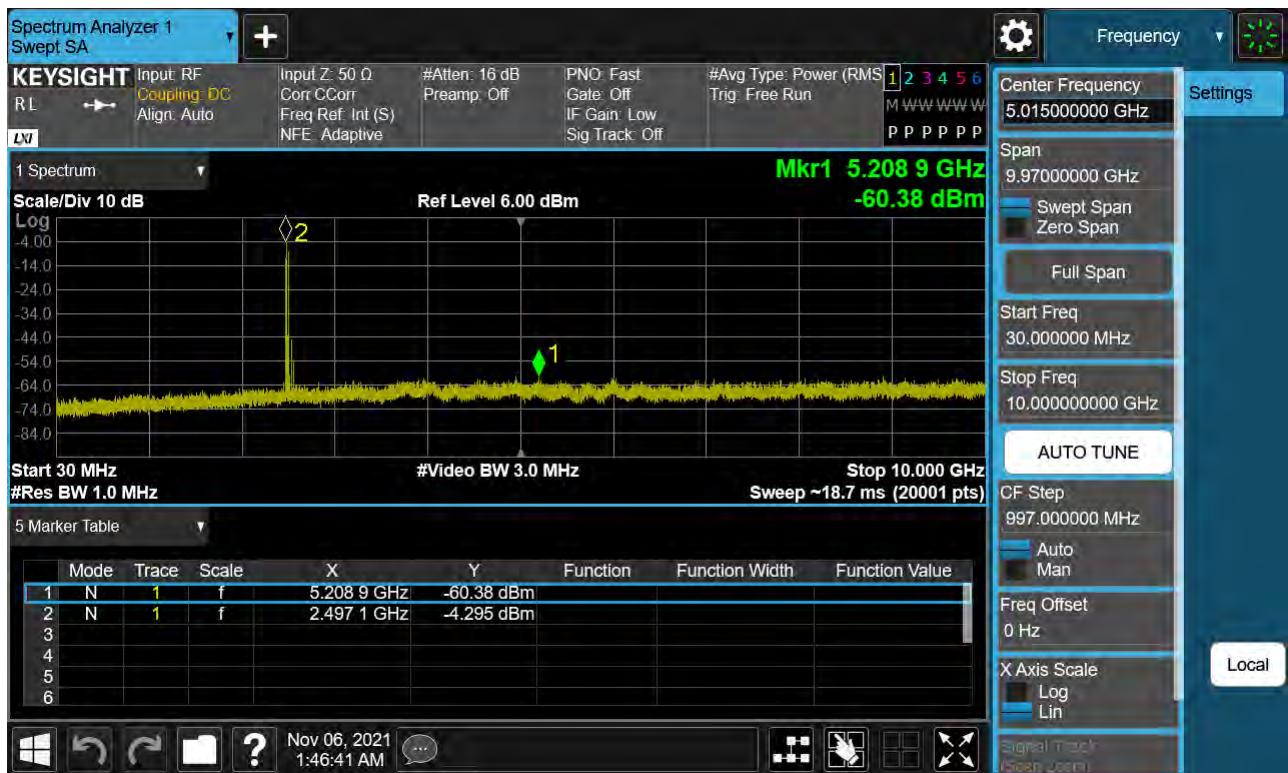


PCC 20 MHz Ch39750 RB1 Offset99 SCC 10 MHz Ch39894 RB1 Offset0

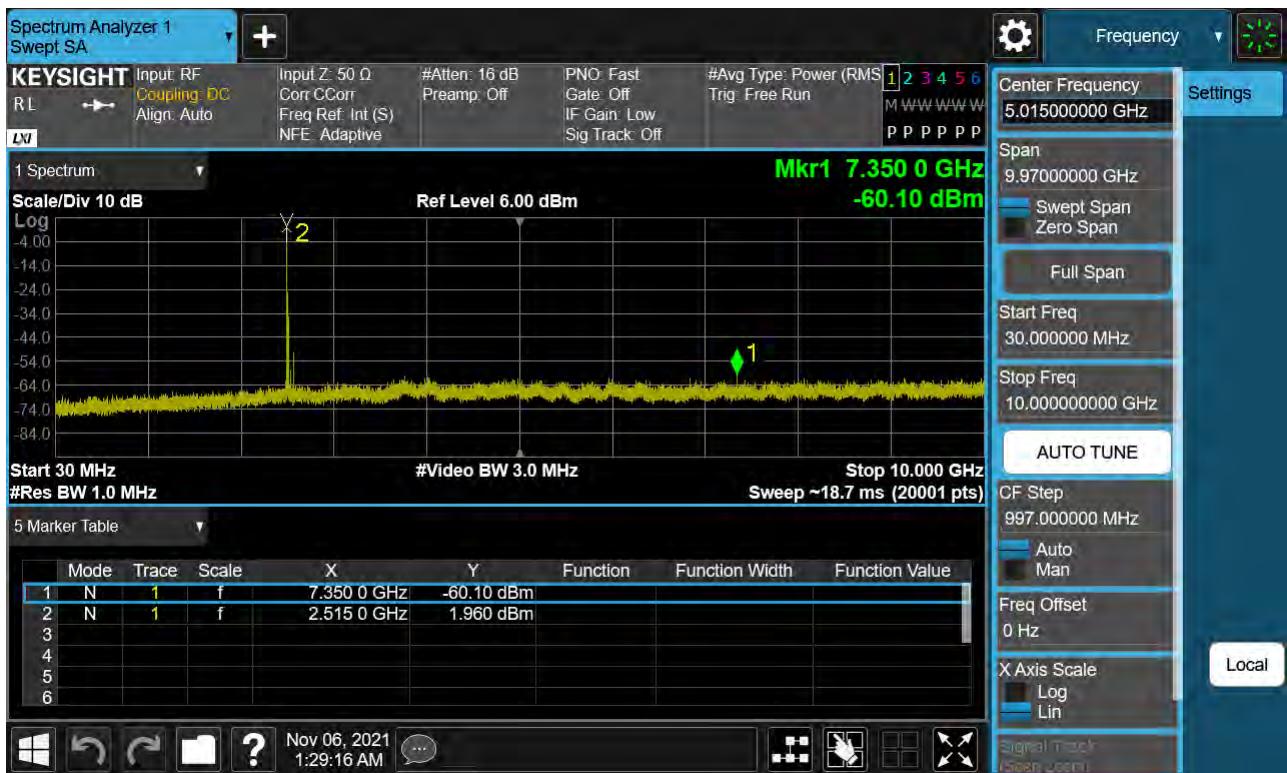


PCC 20 MHz Ch39750 RB100 Offset0 SCC 20 MHz Ch39948 RB100 Offset0

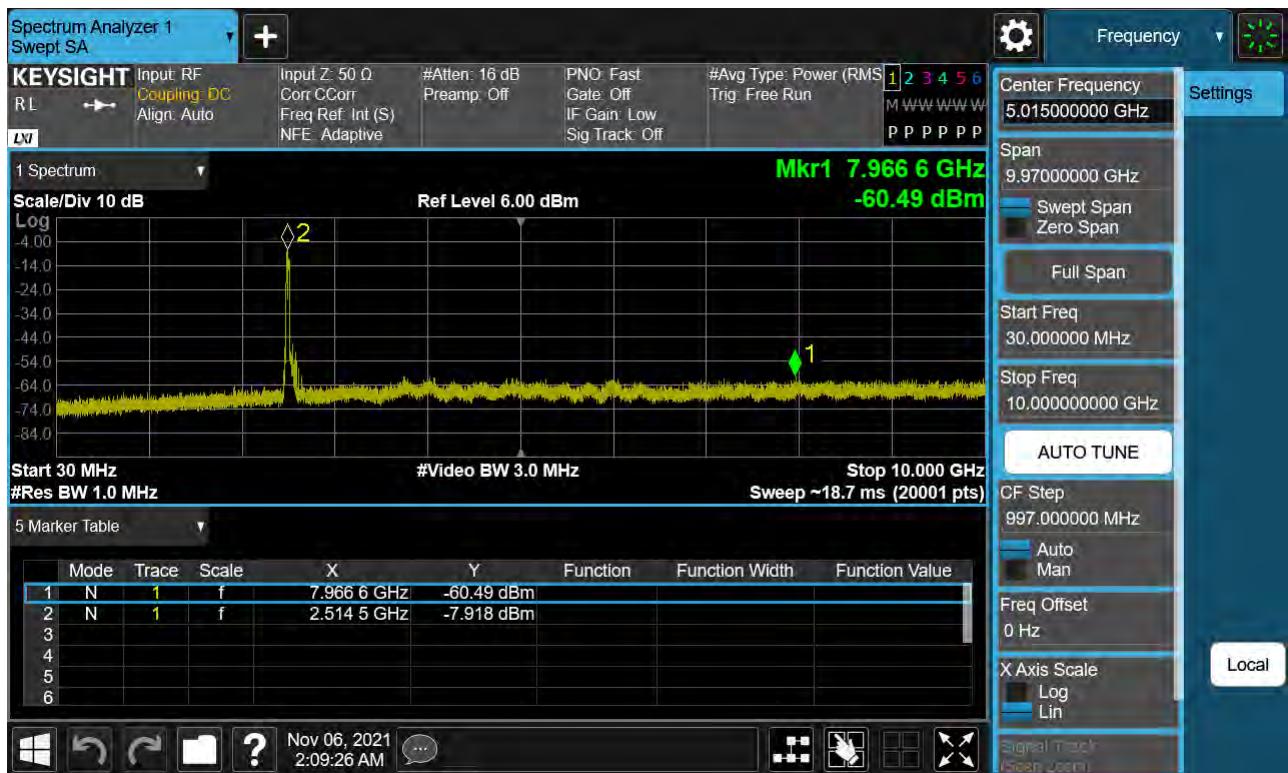

PCC 20 MHz Ch40546 RB1 Offset0 SCC 15 MHz Ch40717 RB1 Offset74

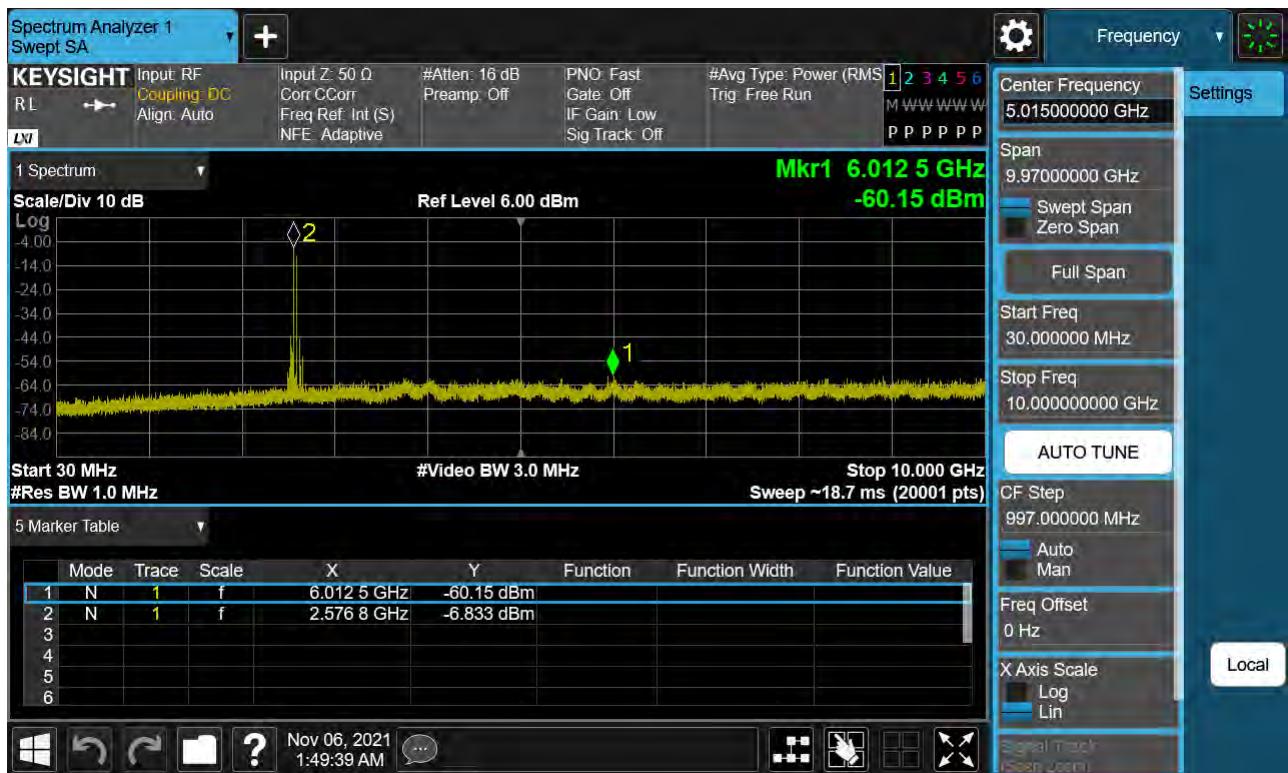


PCC 20 MHz Ch40546 RB1 Offset99 SCC 15 MHz Ch40717 RB1 Offset0

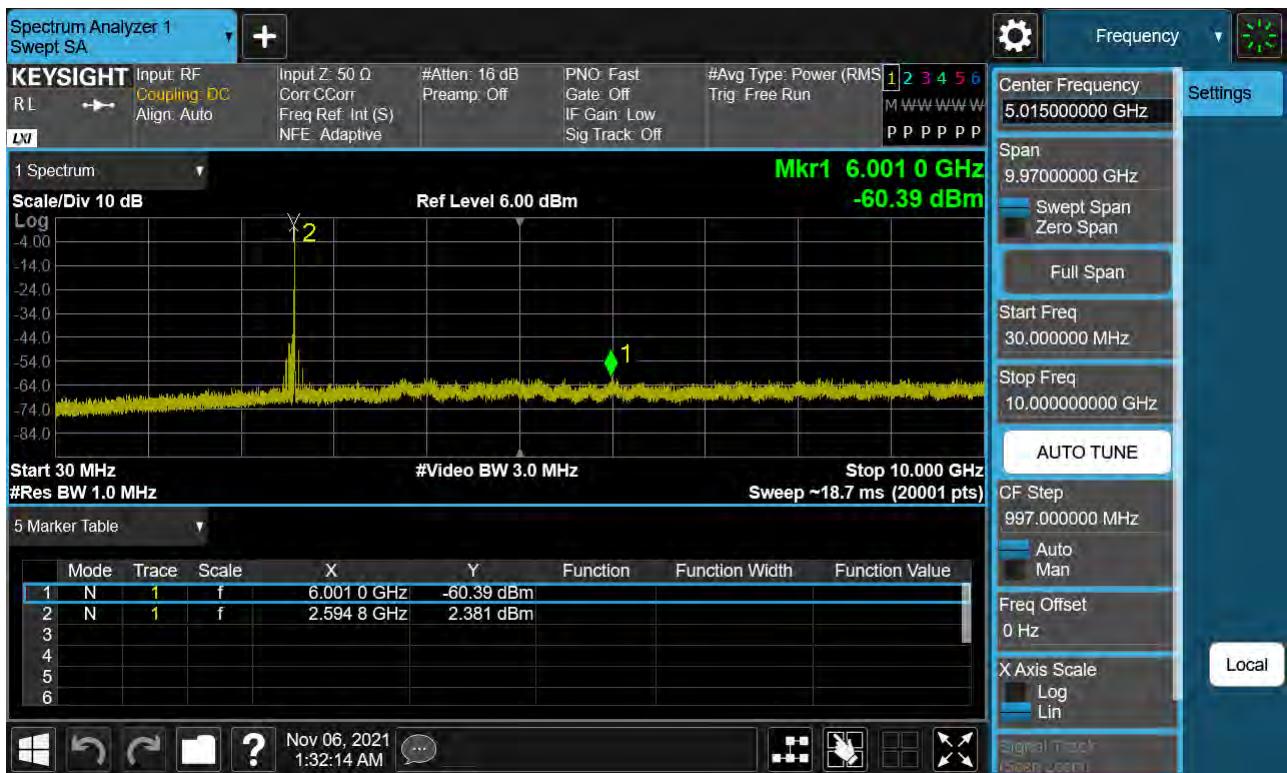





Frequency Range : 10 GHz ~ 26.5 GHz

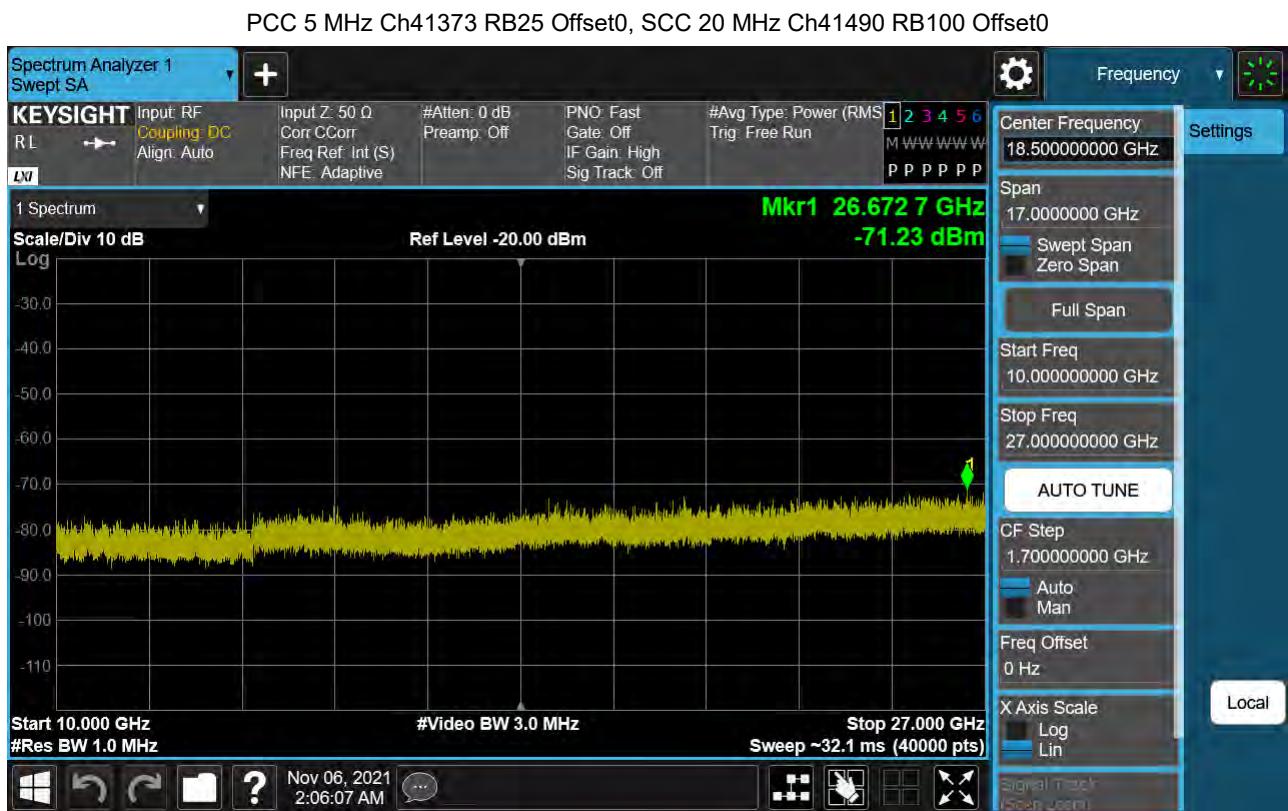


PCC 10 MHz Ch41346 RB1 Offset0, SCC 20 MHz Ch41490 RB1 Offset99

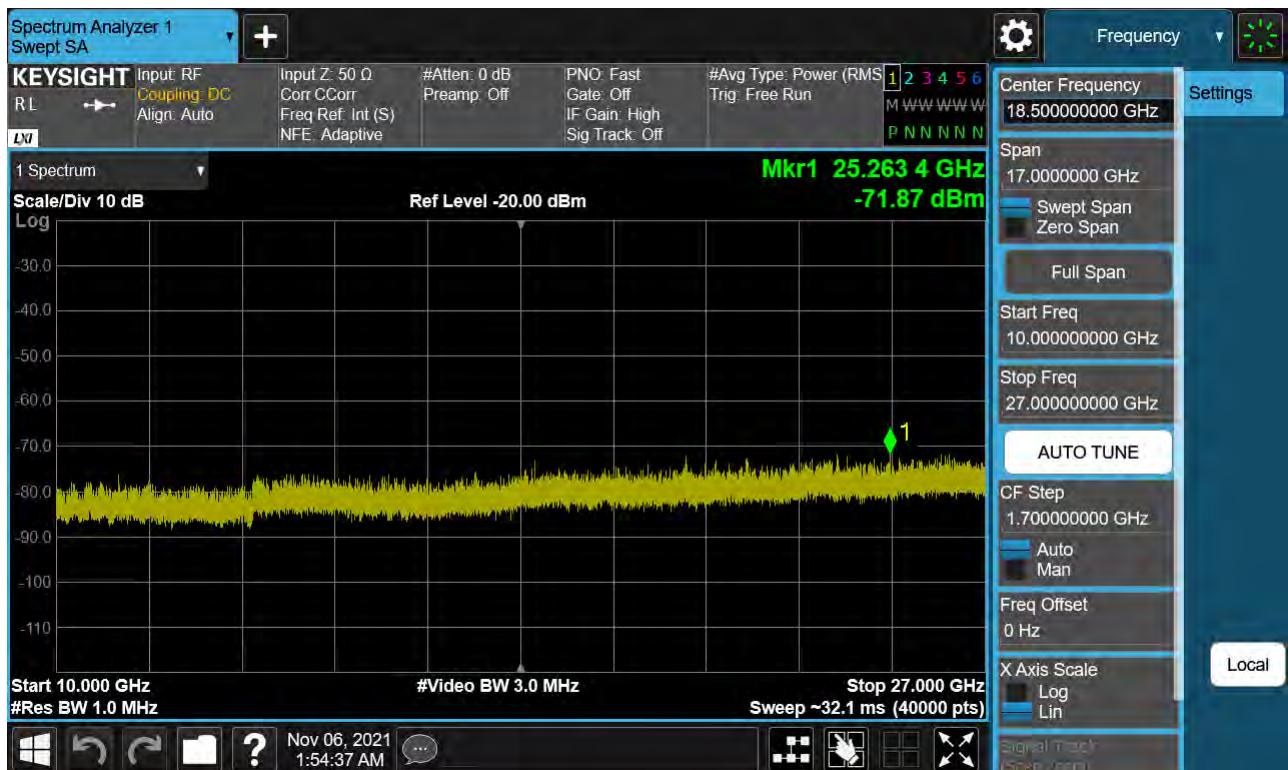


PCC 10 MHz Ch41346 RB1 Offset49, SCC 20 MHz Ch41490 RB1 Offset0

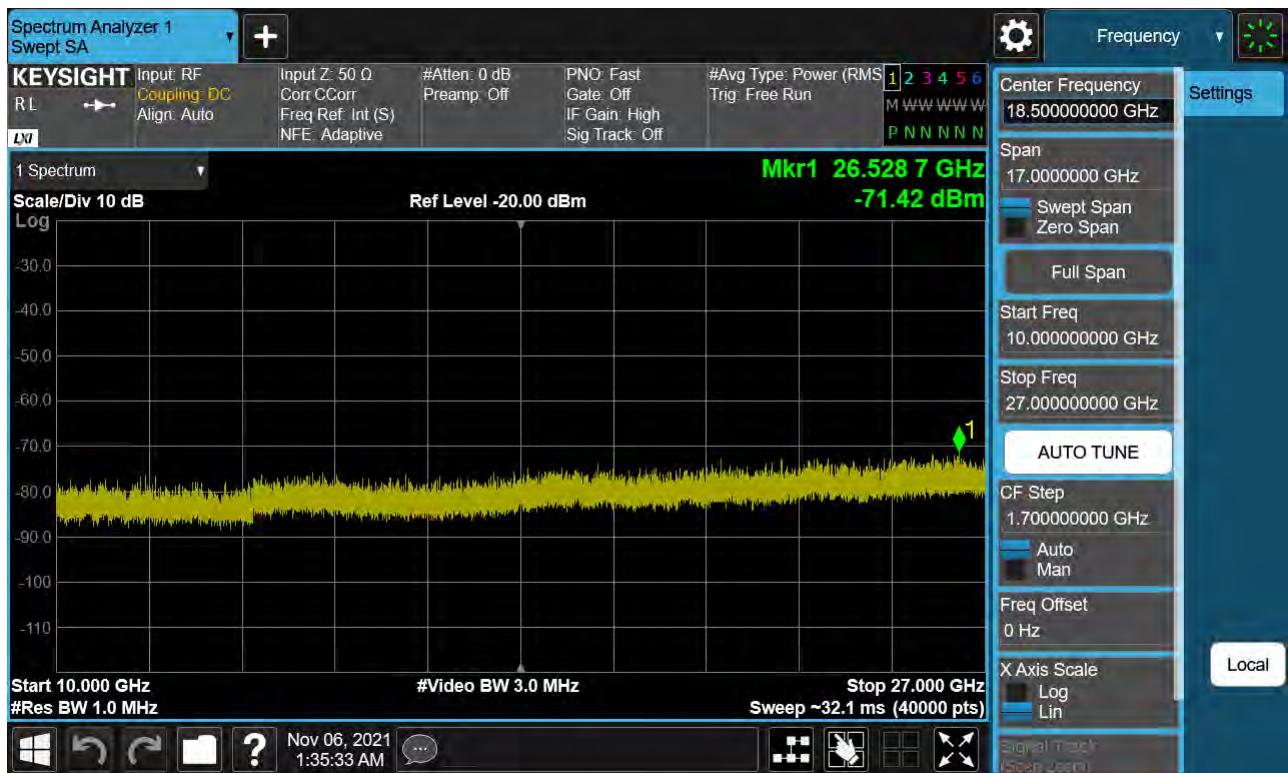


PCC 20 MHz Ch39750 RB1 Offset0, SCC 10 MHz Ch39894 RB1 Offset49

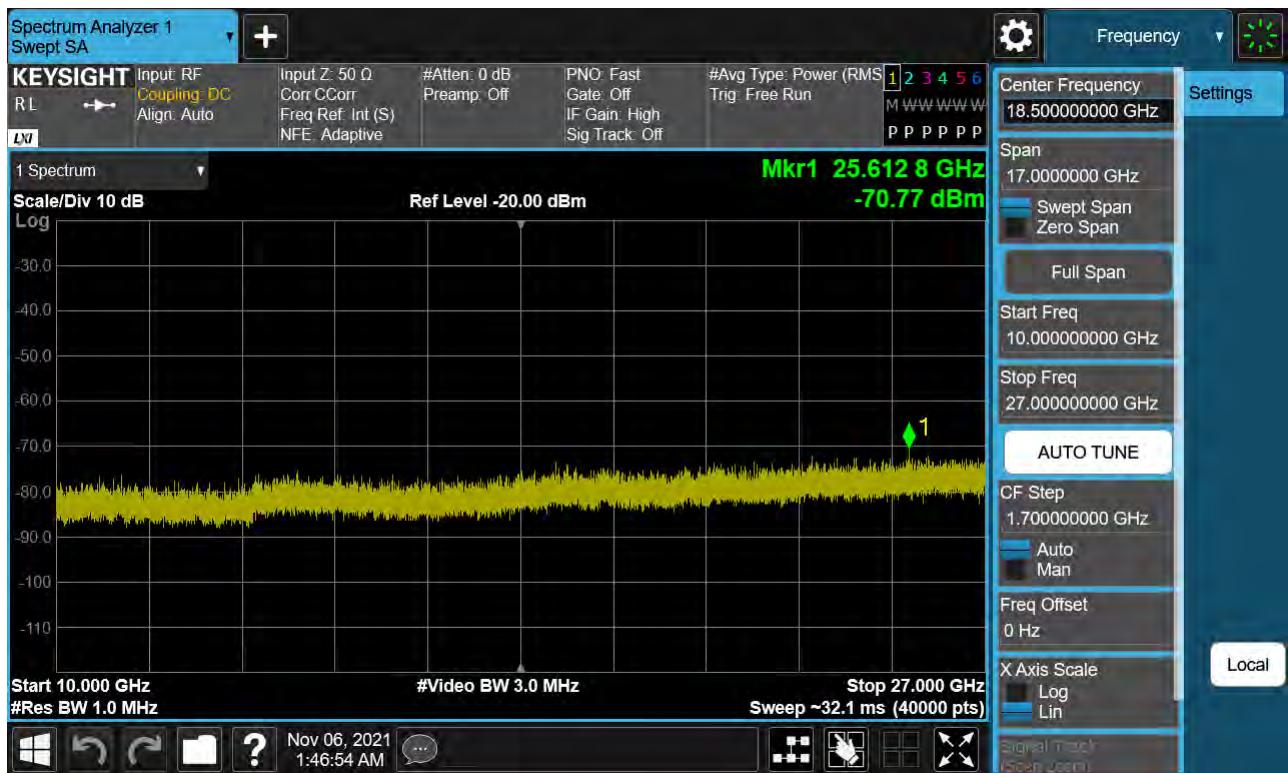


PCC 20 MHz Ch39750 RB1 Offset99, SCC 10 MHz Ch39894 RB1 Offset0

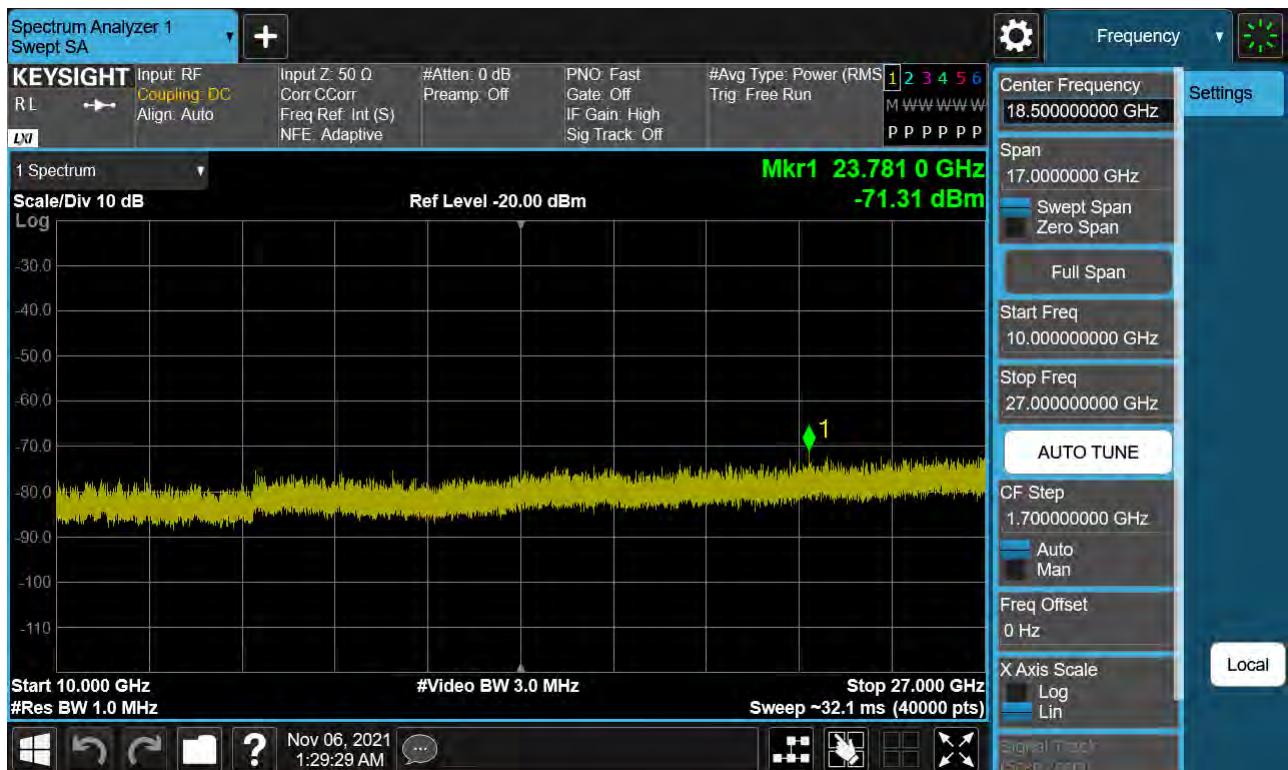


PCC 20 MHz Ch39750 RB100 Offset0, SCC 20 MHz Ch39948 RB100 Offset0

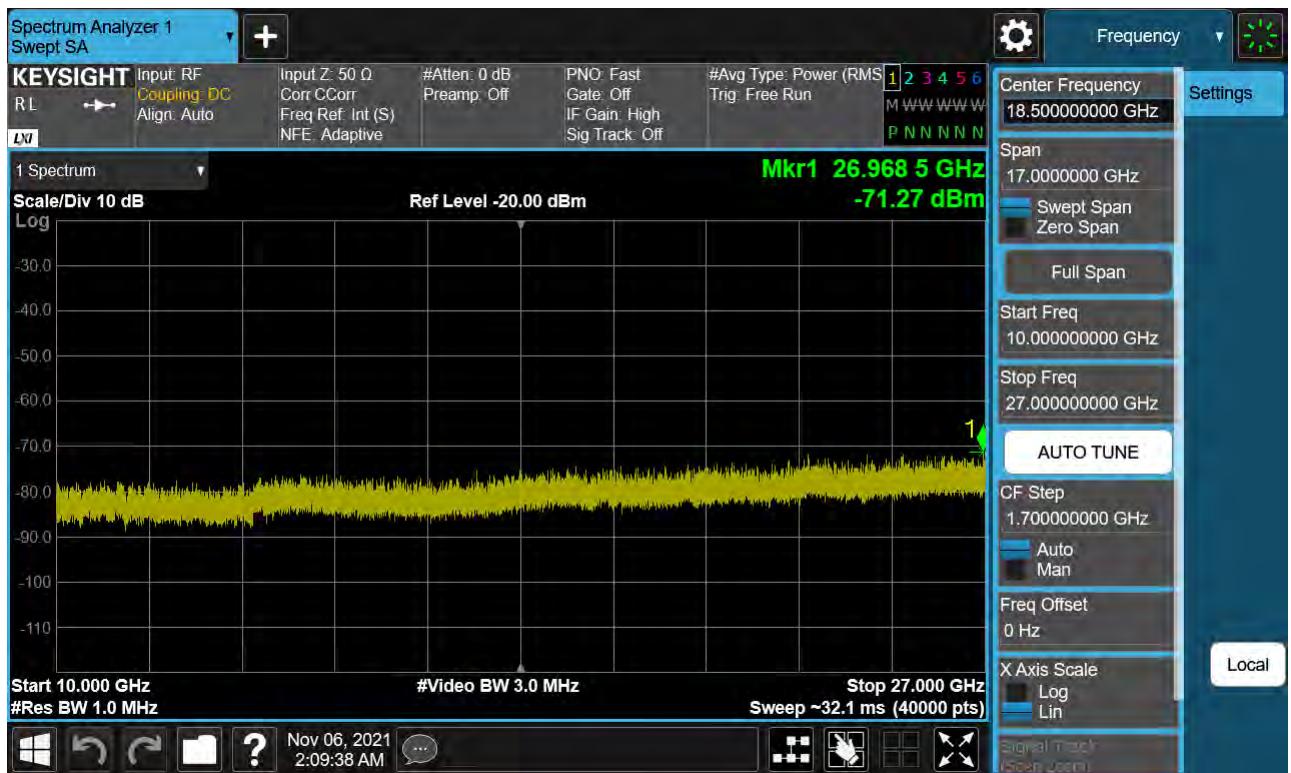


PCC 20 MHz Ch40546 RB1 Offset0, SCC 15 MHz Ch40717 RB1 Offset74

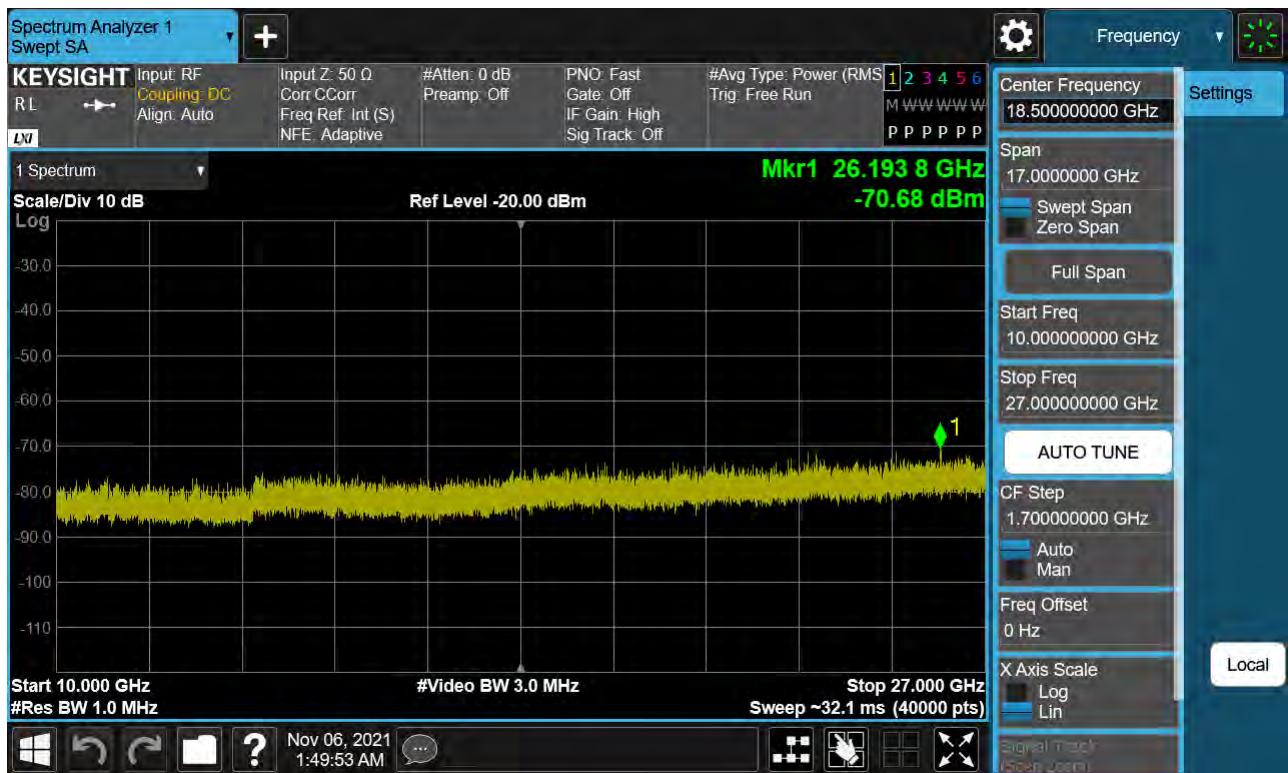

PCC 20 MHz Ch40546 RB1 Offset99, SCC 15 MHz Ch40717 RB1 Offset0

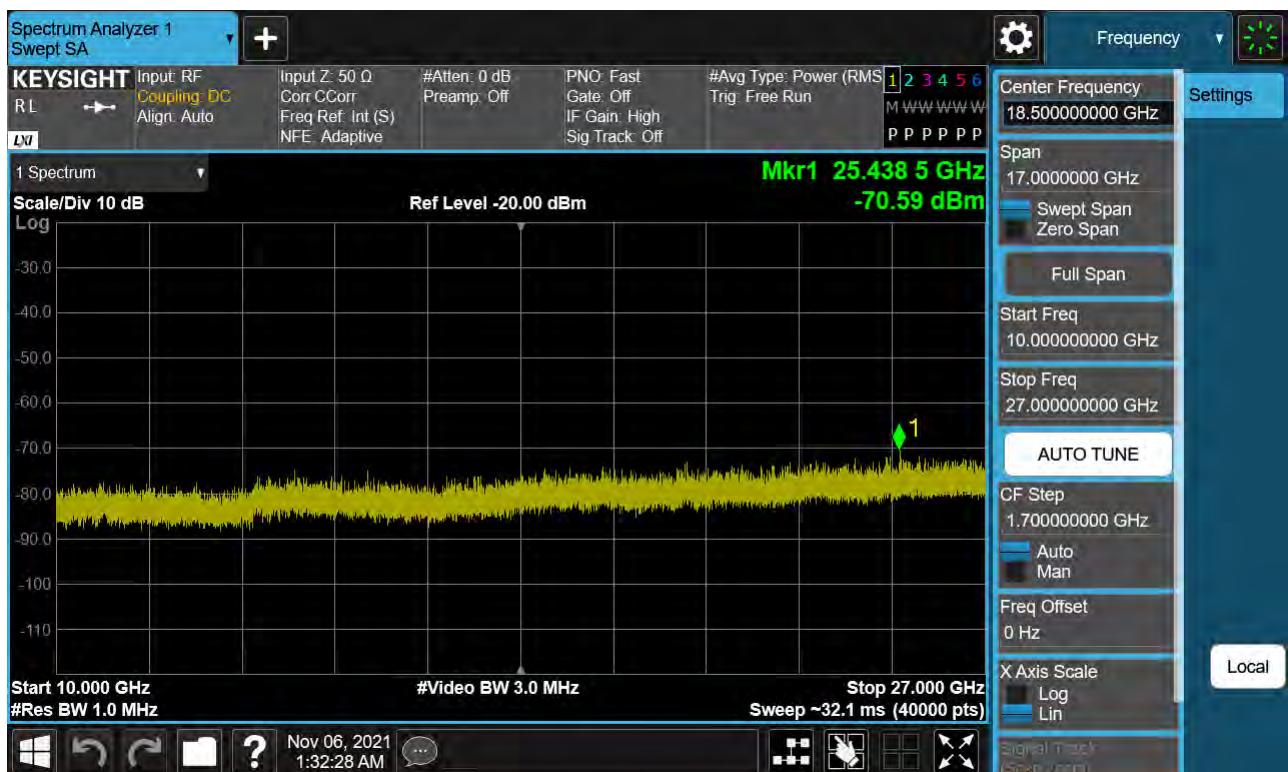


PCC 20 MHz Ch40546 RB100 Offset0, SCC 15 MHz Ch40717 RB75 Offset0

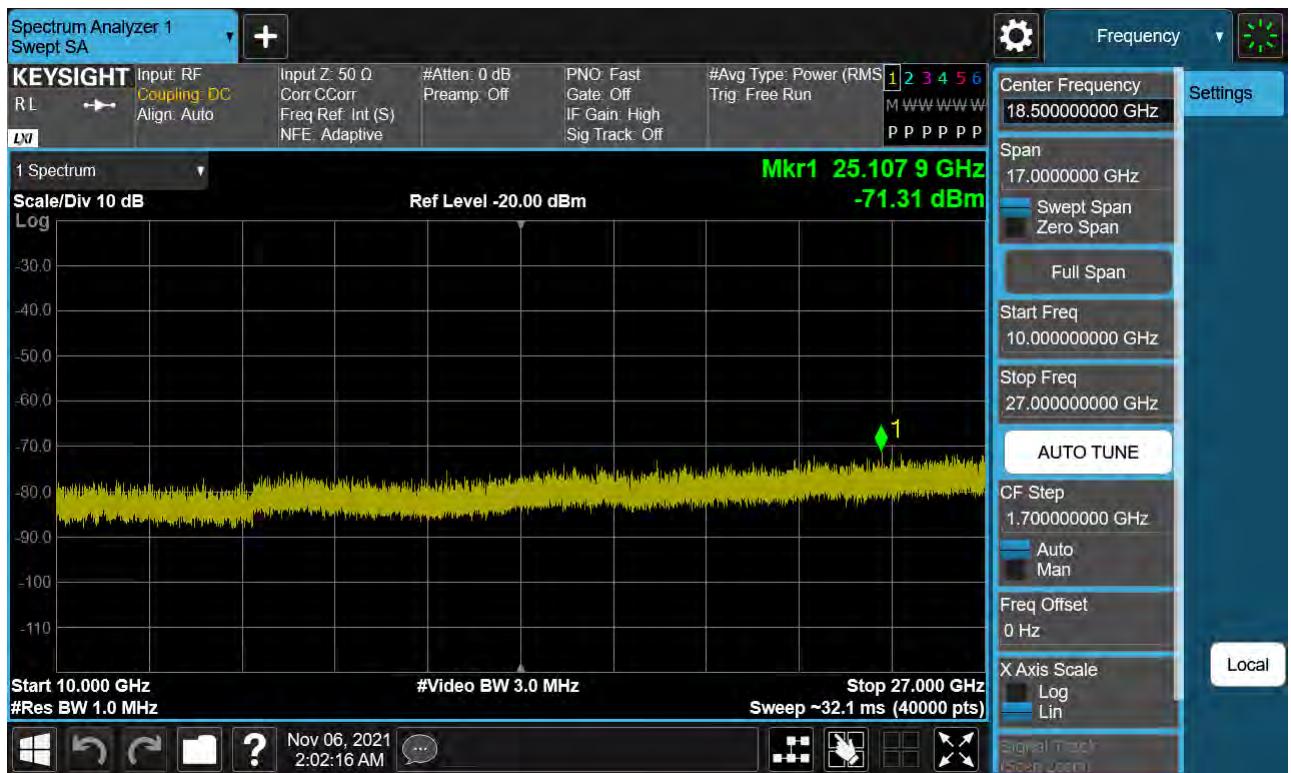


8.4 Channel Edge

8.4.1 PC2


PCC 5 MHz Ch41373 RB25 Offset0, SCC 20 MHz Ch41490 RB100 Offset0

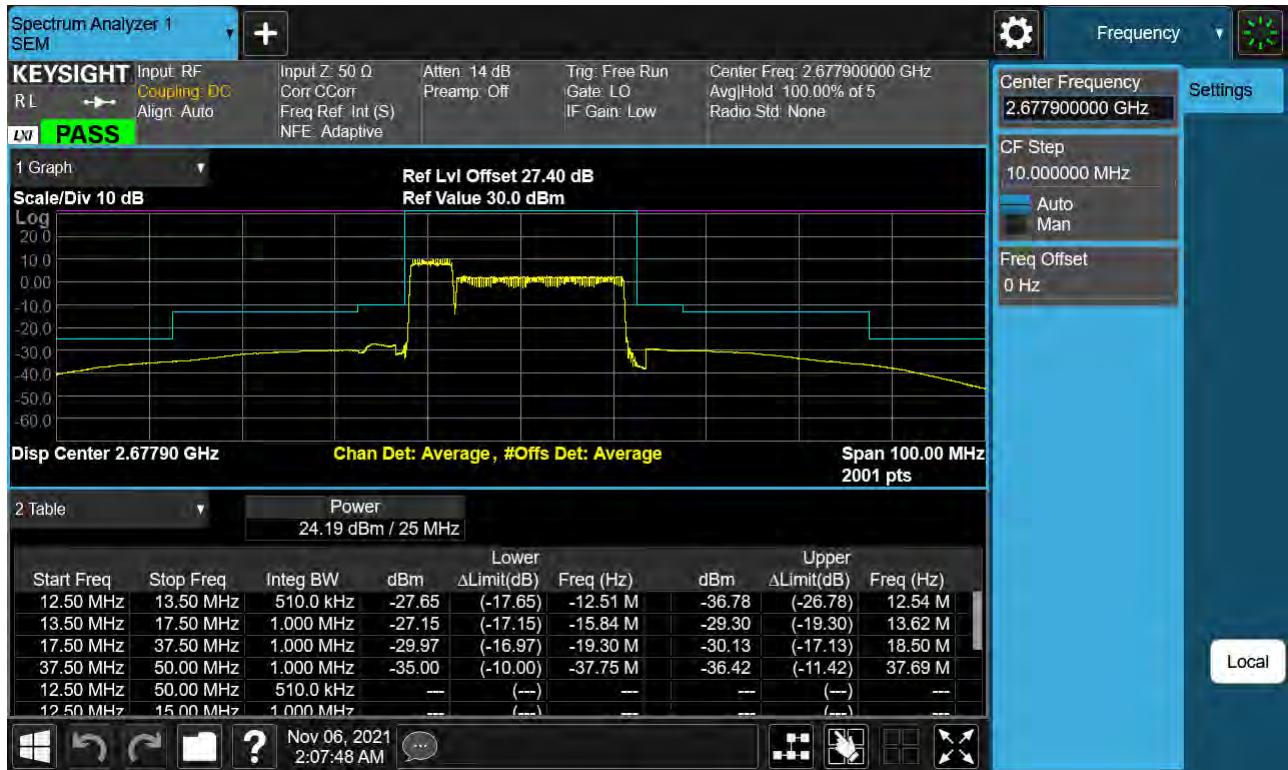


PCC 10 MHz Ch41346 RB1 Offset0, SCC 20 MHz Ch41490 RB1 Offset99

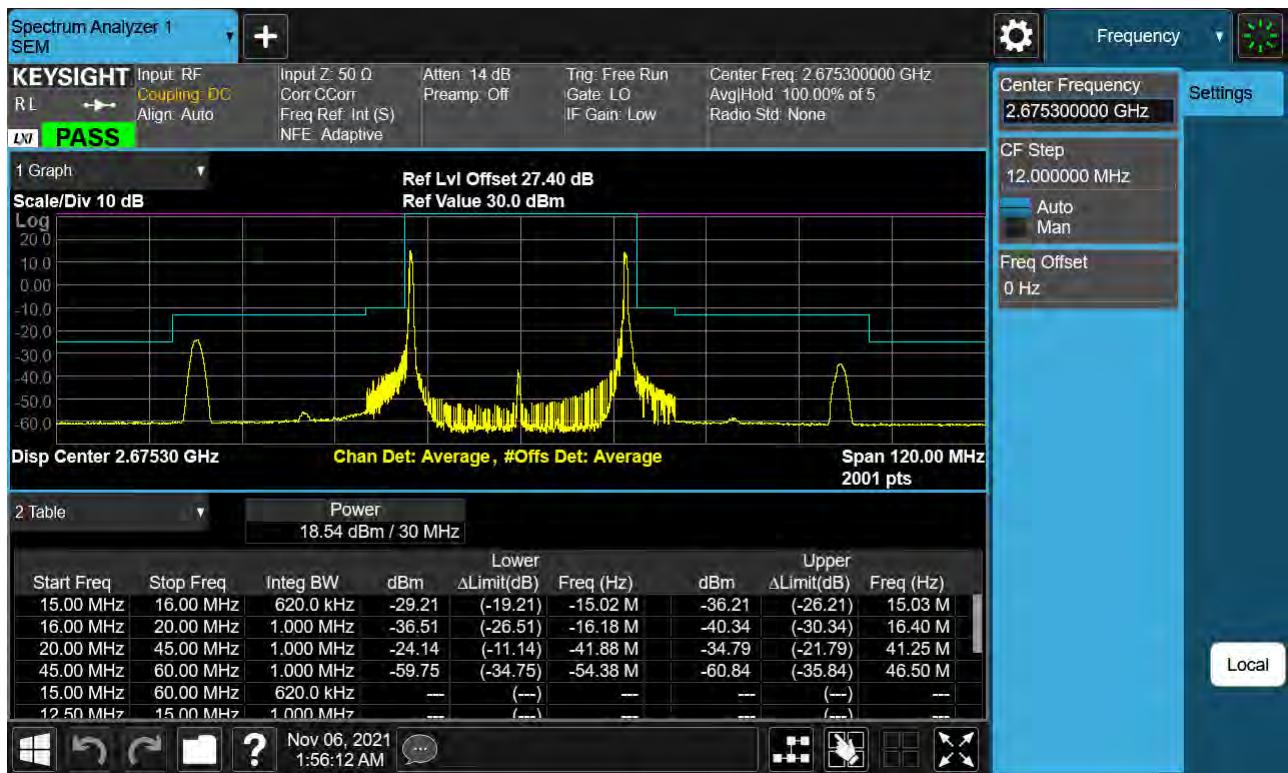


PCC 10 MHz Ch41346 RB1 Offset49, SCC 20 MHz Ch41490 RB1 Offset0

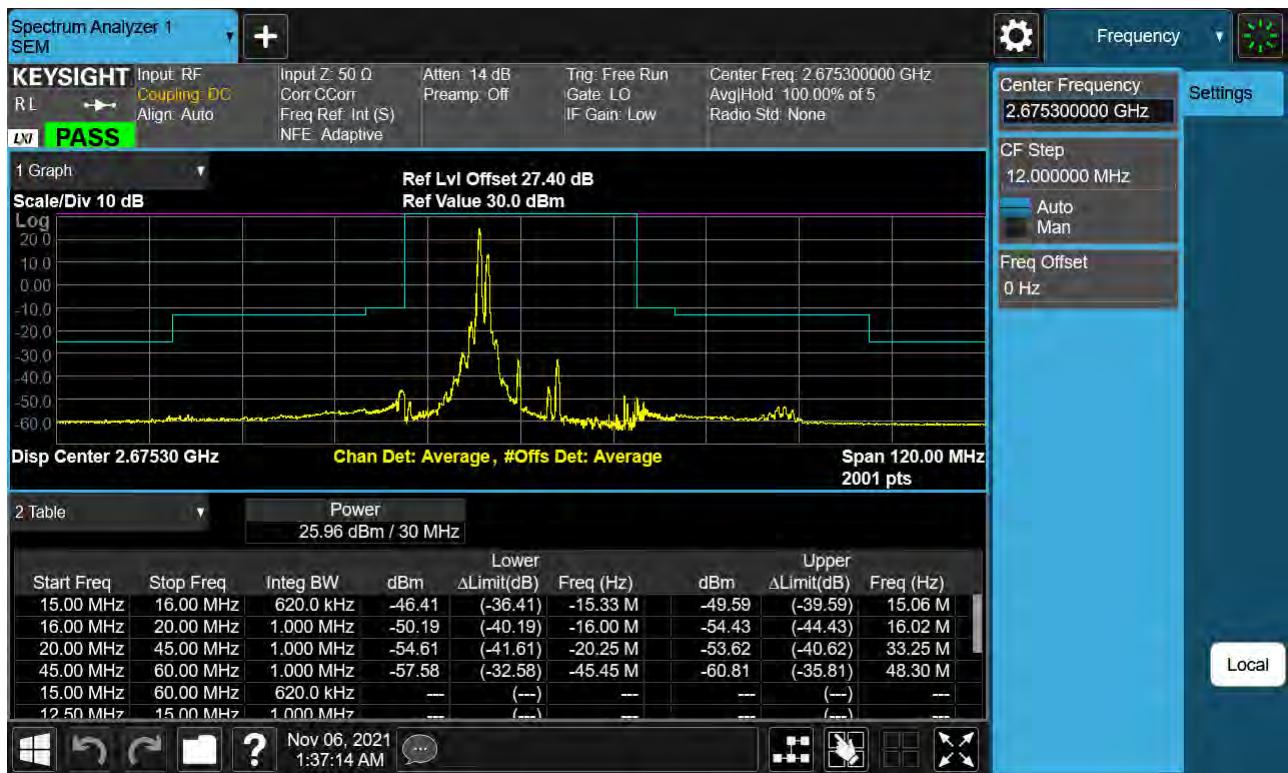


PCC 20 MHz Ch39750 RB1 Offset0, SCC 10 MHz Ch39894 RB1 Offset49-1

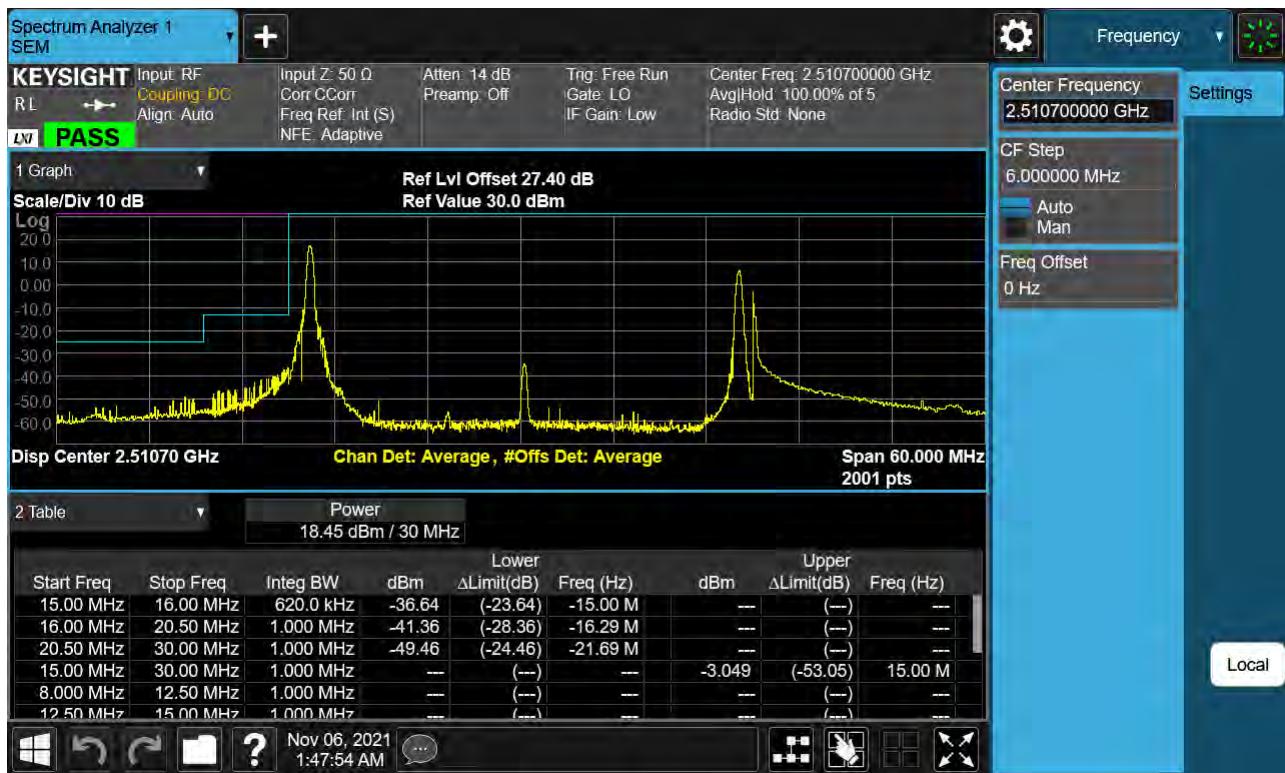


PCC 20 MHz Ch39750 RB1 Offset0, SCC 10 MHz Ch39894 RB1 Offset49-2

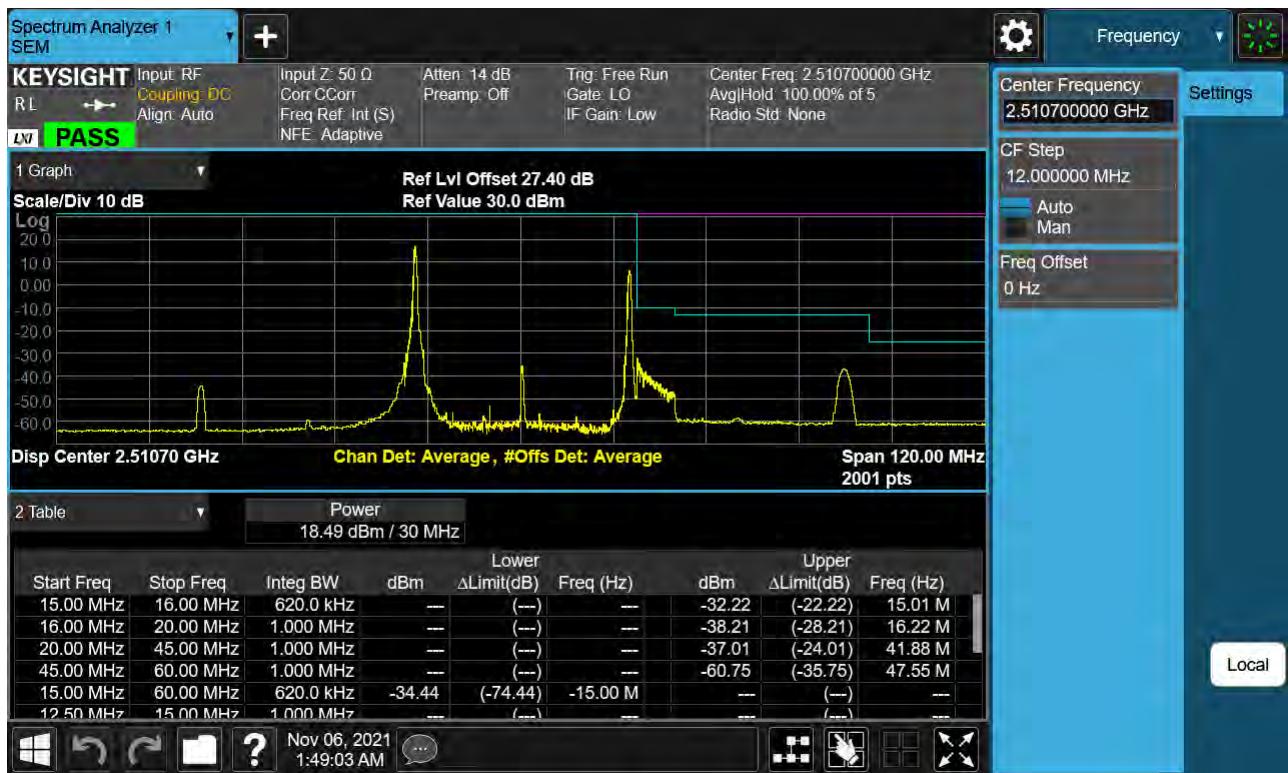

PCC 20 MHz Ch39750 RB1 Offset99, SCC 10 MHz Ch39894 RB1 Offset0-1

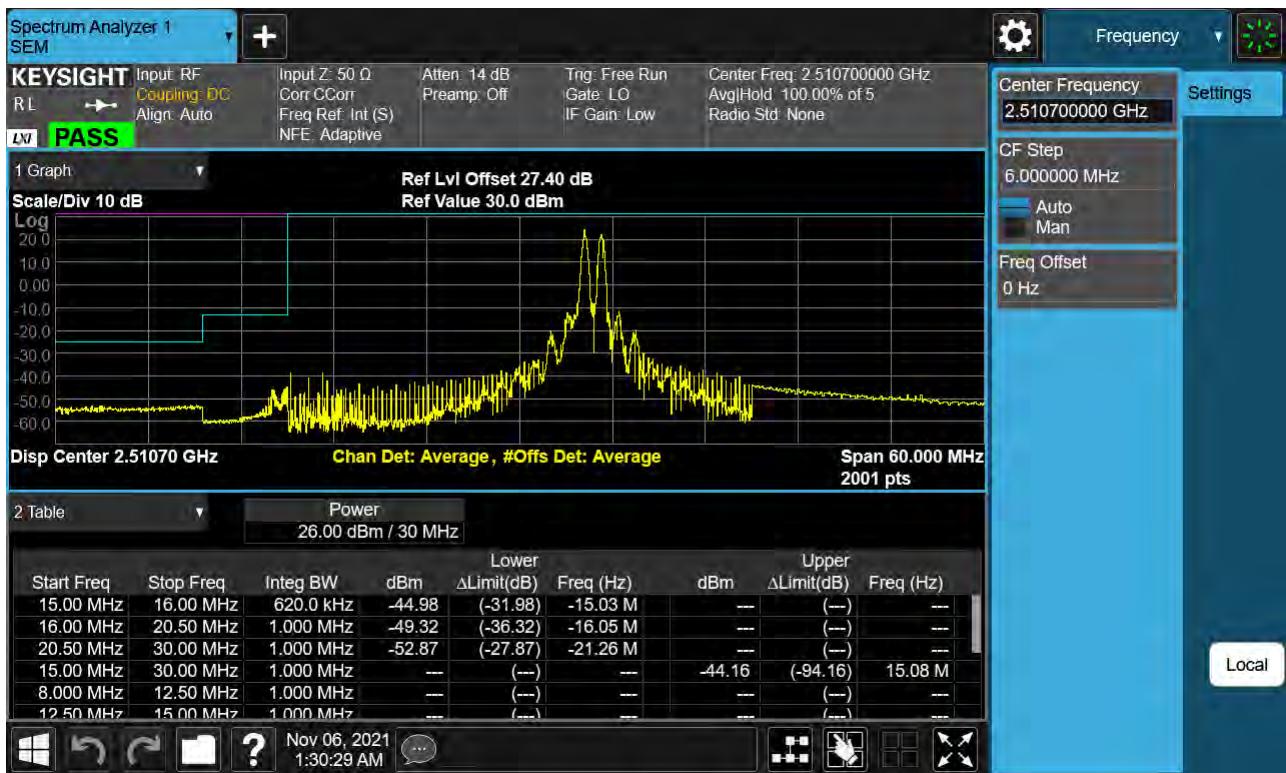


PCC 20 MHz Ch39750 RB1 Offset99, SCC 10 MHz Ch39894 RB1 Offset0-2

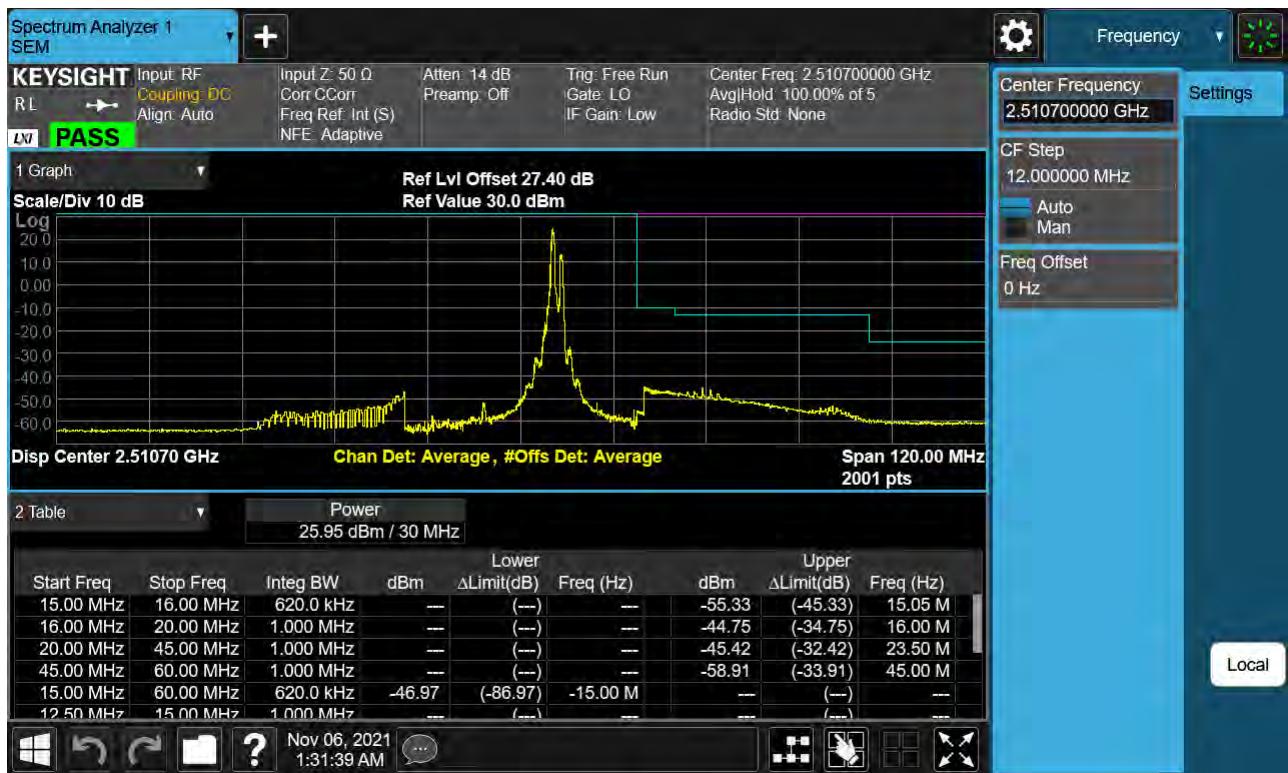

PCC 20 MHz Ch39750 RB100 Offset0, SCC 20 MHz Ch39948 RB100 Offset0




PCC 20 MHz Ch39750 RB100 Offset0, SCC 20 MHz Ch39948 RB100 Offset0-1

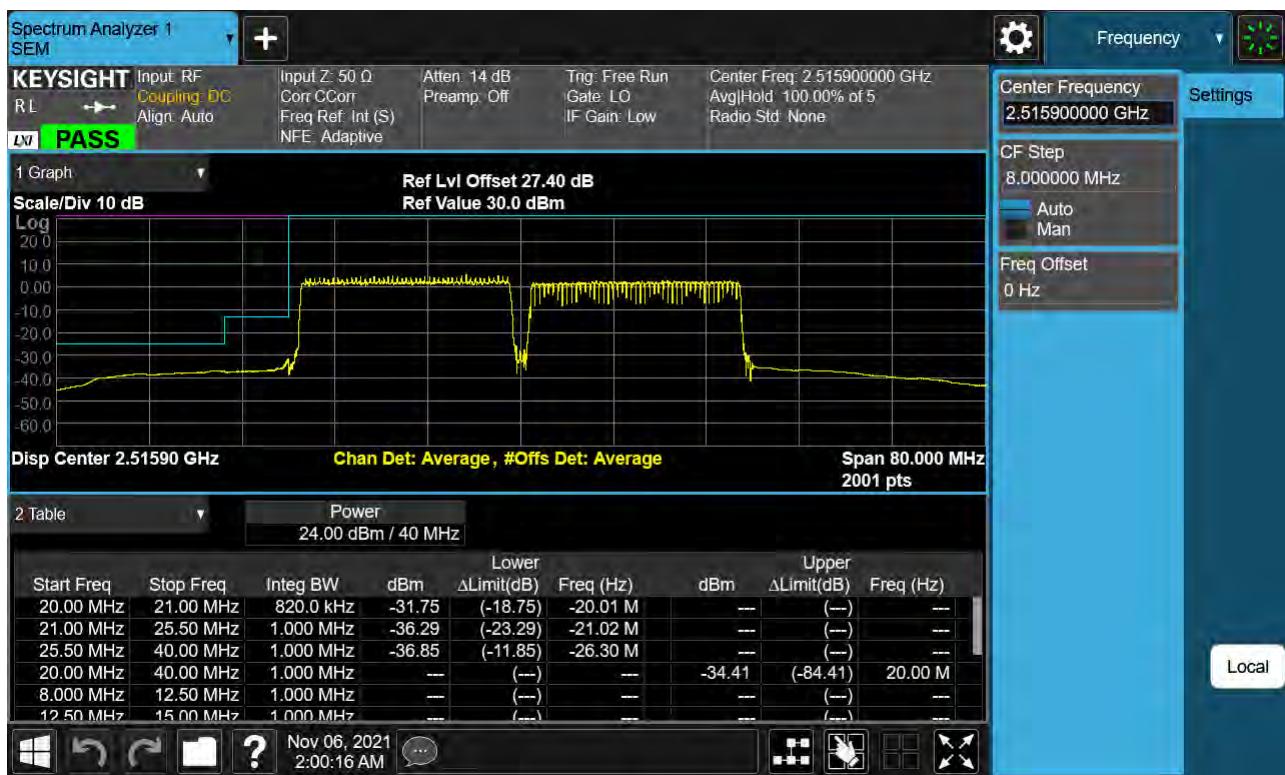


PCC 20 MHz Ch39750 RB100 Offset0, SCC 20 MHz Ch39948 RB100 Offset0-2




PCC 20 MHz Ch40546 RB1 Offset0, SCC 15 MHz Ch40717 RB1 Offset74

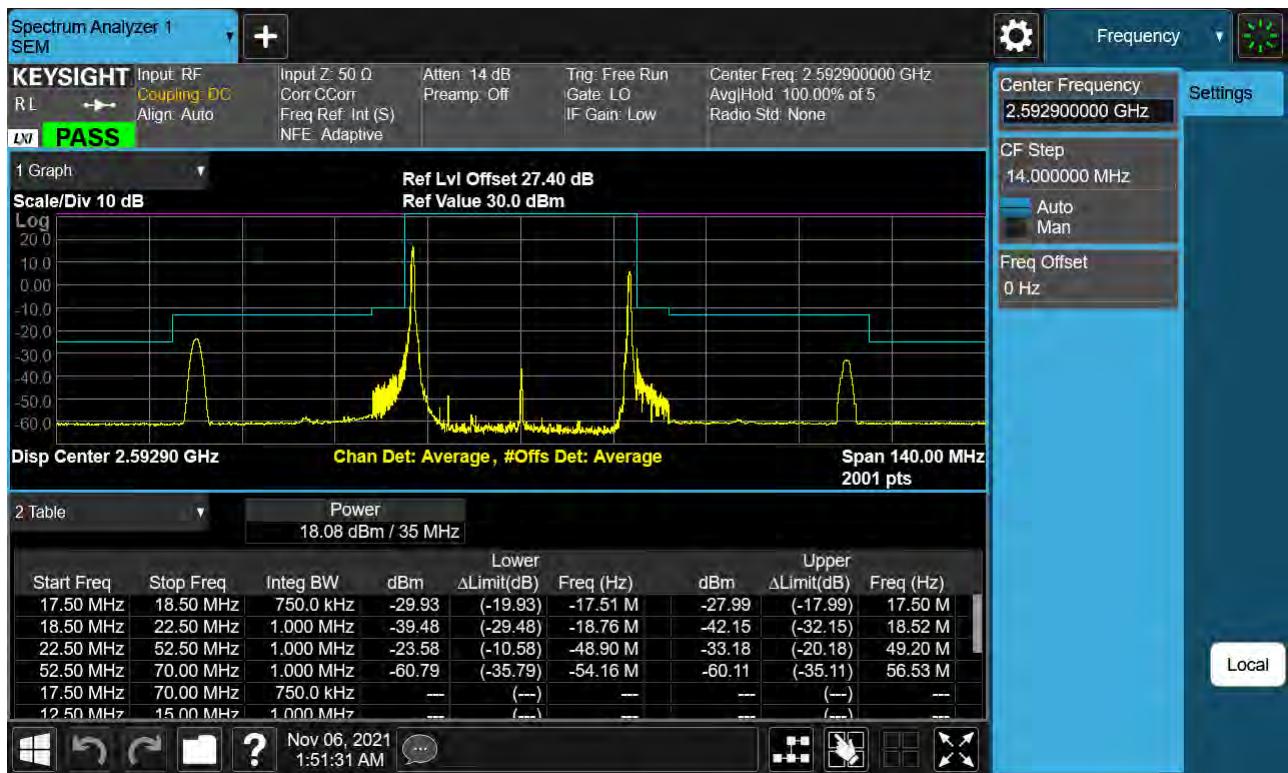

PCC 20 MHz Ch40546 RB1 Offset99, SCC 15 MHz Ch40717 RB1 Offset0

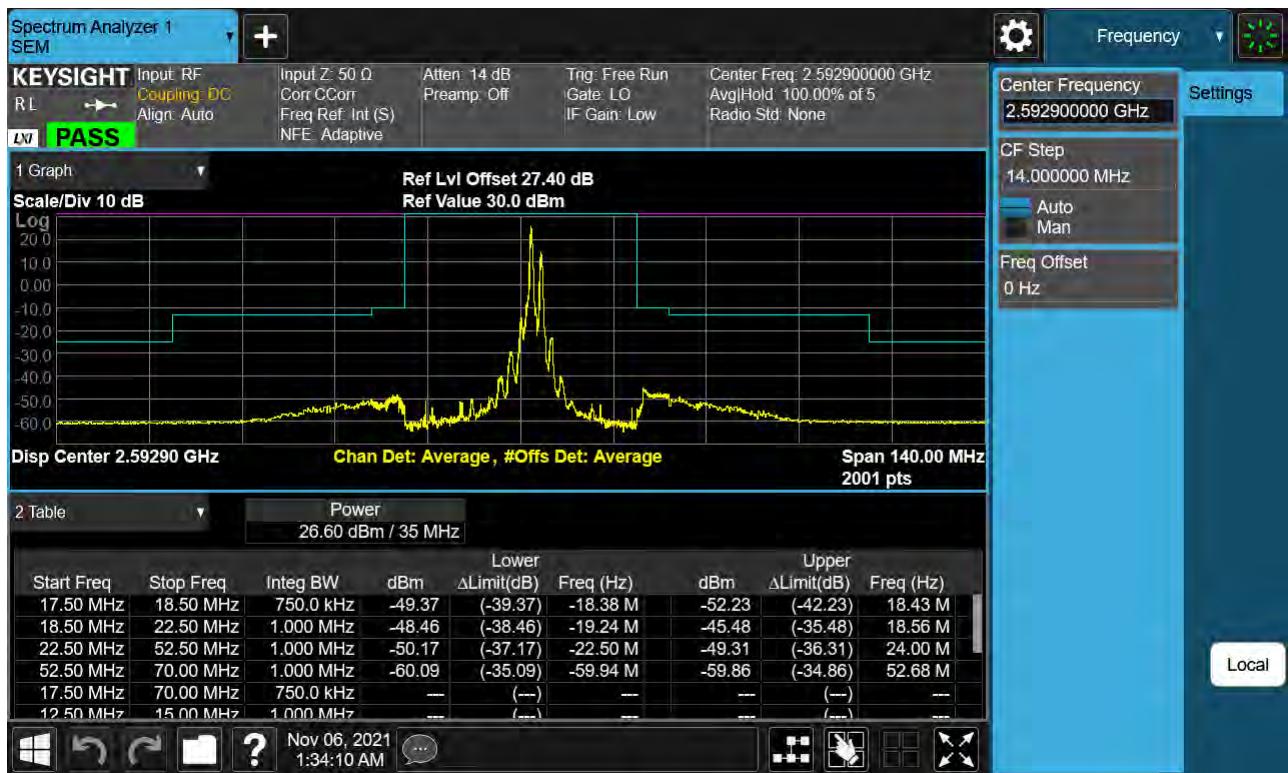

PCC 20 MHz Ch40546 RB100 Offset0, SCC 15 MHz Ch40717 RB75 Offset0

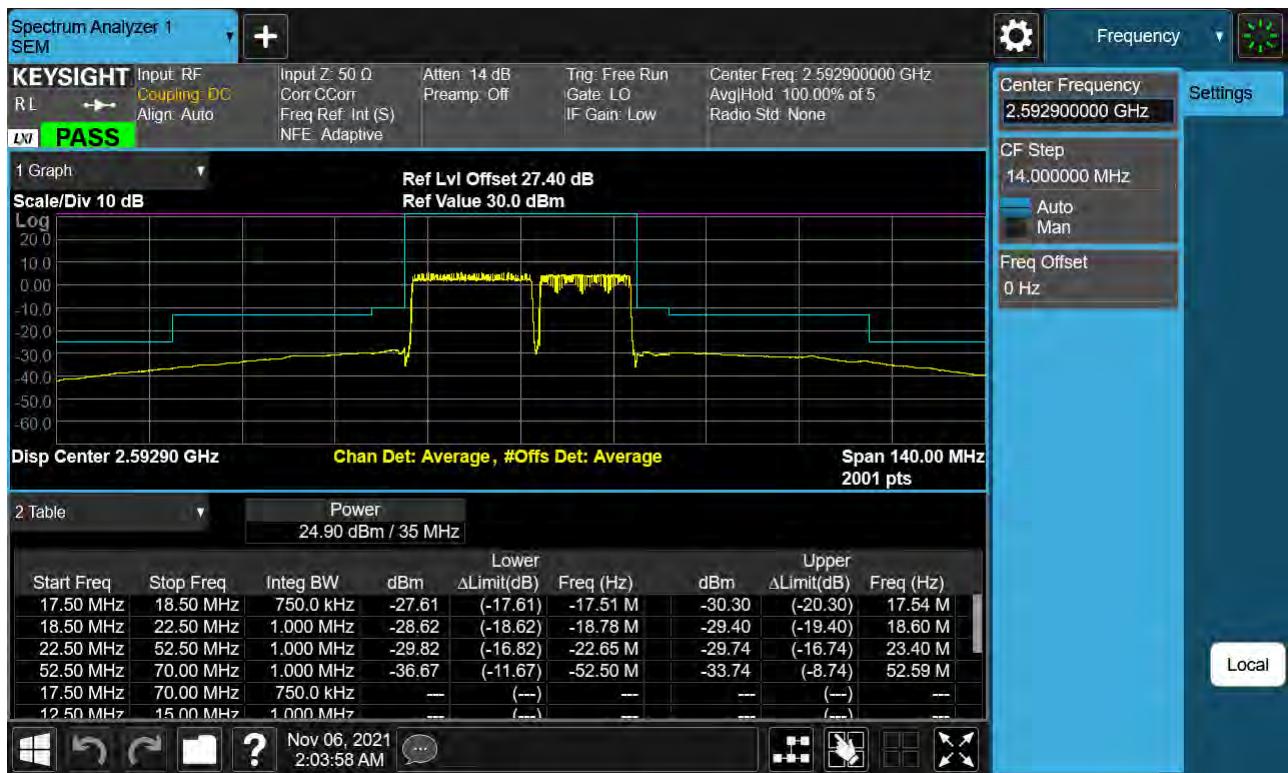

8.5 Frequency Stability / Variation Of Ambient Temperature

8.5.1 PC2

- PCC Channel: 39683
- PCC Frequency: 2499.3 MHz
- PCC BandWidth: 5 MHz
- SCC Channel: 39800
- SCC Frequency: 2511.0 MHz
- SCC BandWidth: 20 MHz
- Voltage : 3.860 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.860	+20(Ref)	-0.004	-0.013	2499.29999	2510.99997
100 %		-30	-0.005	0.001	2499.29999	2511.00000
100 %		-20	0.008	0.002	2499.30002	2511.00001
100 %		-10	-0.012	-0.003	2499.29997	2510.99999
100 %		0	0.001	0.000	2499.30000	2511.00000
100 %		10	-0.005	0.010	2499.29999	2511.00002
100 %		30	0.004	0.007	2499.30001	2511.00002
100 %		40	-0.004	0.006	2499.29999	2511.00001
100 %		50	0.003	0.002	2499.30001	2511.00001
Batt. Endpoint	3.400	20	0.001	0.013	2499.30000	2511.00003

PCC Channel: 39705
 PCC Frequency: 2501.5 MHz
 PCC BandWidth: 10 MHz
 SCC Channel: 39849
 SCC Frequency: 2515.9 MHz
 SCC BandWidth: 20 MHz
 Voltage : 3.860 VDC
 LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.860	+20(Ref)	-0.006	-0.006	2501.49999	2515.89998
100 %		-30	0.002	0.005	2501.50001	2515.90001
100 %		-20	0.005	-0.008	2501.50001	2515.89998
100 %		-10	-0.004	0.004	2501.49999	2515.90001
100 %		0	0.013	0.001	2501.50003	2515.90000
100 %		10	-0.013	0.005	2501.49997	2515.90001
100 %		30	-0.007	0.000	2501.49998	2515.90000
100 %		40	0.007	0.000	2501.50002	2515.90000
100 %		50	0.000	0.010	2501.50000	2515.90003
Batt. Endpoint	3.400	20	-0.002	-0.006	2501.50000	2515.89998

PCC Channel: 39728
 PCC Frequency: 2503.8 MHz
 PCC BandWidth: 15 MHz
 SCC Channel: 39899
 SCC Frequency: 2520.9 MHz
 SCC BandWidth: 20 MHz
 Voltage : 3.860 VDC
 LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.860	+20(Ref)	0.004	0.003	2503.80001	2520.90001
100 %		-30	0.011	0.009	2503.80003	2520.90002
100 %		-20	0.007	-0.006	2503.80002	2520.89998
100 %		-10	0.000	0.010	2503.80000	2520.90003
100 %		0	0.013	0.002	2503.80003	2520.90001
100 %		10	-0.003	0.014	2503.79999	2520.90003
100 %		30	0.008	-0.002	2503.80002	2520.90000
100 %		40	0.012	0.011	2503.80003	2520.90003
100 %		50	0.006	0.013	2503.80001	2520.90003
Batt. Endpoint	3.400	20	-0.005	0.008	2503.79999	2520.90002

PCC Channel: 39750
 PCC Frequency: 2506.0 MHz
 PCC BandWidth: 20 MHz
 SCC Channel: 39948
 SCC Frequency: 2525.8 MHz
 SCC BandWidth: 20 MHz
 Voltage : 3.860 VDC
 LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.860	+20(Ref)	0.004	0.009	2506.00001	2525.80002
100 %		-30	0.007	-0.006	2506.00002	2525.79998
100 %		-20	-0.006	-0.005	2505.99998	2525.79999
100 %		-10	-0.002	0.009	2506.00000	2525.80002
100 %		0	-0.002	0.000	2506.00000	2525.80000
100 %		10	0.003	0.000	2506.00001	2525.80000
100 %		30	-0.013	-0.005	2505.99997	2525.79999
100 %		40	0.013	-0.004	2506.00003	2525.79999
100 %		50	-0.005	-0.009	2505.99999	2525.79998
Batt. Endpoint		20	0.000	-0.006	2506.00000	2525.79999

PCC Channel: 41373
 PCC Frequency: 2668.3 MHz
 PCC BandWidth: 5 MHz
 SCC Channel: 41490
 SCC Frequency: 2680.0 MHz
 SCC BandWidth: 20 MHz
 Voltage : 3.860 VDC
 LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.860	+20(Ref)	-0.013	0.000	2668.29996	2680.00000
100 %		-30	-0.006	0.004	2668.29999	2680.00001
100 %		-20	0.000	0.012	2668.30000	2680.00003
100 %		-10	0.010	0.001	2668.30003	2680.00000
100 %		0	-0.001	-0.010	2668.30000	2679.99997
100 %		10	-0.005	0.008	2668.29999	2680.00002
100 %		30	0.008	0.005	2668.30002	2680.00001
100 %		40	0.008	-0.012	2668.30002	2679.99997
100 %		50	0.008	0.004	2668.30002	2680.00001
Batt. Endpoint	3.400	20	-0.003	0.007	2668.29999	2680.00002

<input checked="" type="checkbox"/> PCC Channel:	41346	
<input checked="" type="checkbox"/> PCC Frequency:	2665.6	MHz
<input checked="" type="checkbox"/> PCC BandWidth:	10	MHz
<input checked="" type="checkbox"/> SCC Channel:	41490	
<input checked="" type="checkbox"/> SCC Frequency:	2680.0	MHz
<input checked="" type="checkbox"/> SCC BandWidth:	20	MHz
<input checked="" type="checkbox"/> Voltage :	3.860	VDC
<input checked="" type="checkbox"/> LIMIT:	Emission must remain in band	

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.860	+20(Ref)	0.013	-0.013	2665.60003	2679.99996
100 %		-30	-0.005	0.007	2665.59999	2680.00002
100 %		-20	0.001	0.002	2665.60000	2680.00001
100 %		-10	-0.004	0.013	2665.59999	2680.00003
100 %		0	-0.002	-0.013	2665.60000	2679.99997
100 %		10	-0.008	0.006	2665.59998	2680.00002
100 %		30	-0.013	-0.006	2665.59997	2679.99998
100 %		40	0.014	0.010	2665.60004	2680.00003
100 %		50	-0.013	-0.014	2665.59997	2679.99996
Batt. Endpoint		20	0.009	-0.003	2665.60002	2679.99999

PCC Channel: 41319
 PCC Frequency: 2662.9 MHz
 PCC BandWidth: 15 MHz
 SCC Channel: 41490
 SCC Frequency: 2680.0 MHz
 SCC BandWidth: 20 MHz
 Voltage : 3.860 VDC
 LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.860	+20(Ref)	-0.002	0.001	2662.89999	2680.00000
100 %		-30	-0.006	0.003	2662.89998	2680.00001
100 %		-20	0.001	0.002	2662.90000	2680.00001
100 %		-10	0.013	0.001	2662.90003	2680.00000
100 %		0	0.003	0.013	2662.90001	2680.00003
100 %		10	0.010	-0.005	2662.90003	2679.99999
100 %		30	0.000	0.011	2662.90000	2680.00003
100 %		40	0.000	-0.013	2662.90000	2679.99997
100 %		50	0.002	0.000	2662.90001	2680.00000
Batt. Endpoint	3.400	20	-0.002	-0.010	2662.89999	2679.99997

<input type="checkbox"/> PCC Channel:	41292	
<input type="checkbox"/> PCC Frequency:	2660.2	MHz
<input type="checkbox"/> PCC BandWidth:	20	MHz
<input type="checkbox"/> SCC Channel:	41490	
<input type="checkbox"/> SCC Frequency:	2680.0	MHz
<input type="checkbox"/> SCC BandWidth:	20	MHz
<input type="checkbox"/> Voltage :	3.860	MHz
<input type="checkbox"/> LIMIT:	Emission must remain in band	

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.860	+20(Ref)	0.009	0.002	2660.20002	2680.00001
100 %		-30	0.012	-0.001	2660.20003	2680.00000
100 %		-20	0.002	-0.004	2660.20000	2679.99999
100 %		-10	0.008	0.004	2660.20002	2680.00001
100 %		0	-0.002	0.005	2660.19999	2680.00001
100 %		10	0.005	0.007	2660.20001	2680.00002
100 %		30	0.004	-0.010	2660.20001	2679.99997
100 %		40	0.013	0.005	2660.20003	2680.00001
100 %		50	0.006	0.010	2660.20002	2680.00003
Batt. Endpoint		20	0.008	0.003	2660.20002	2680.00001

8.6 Radiated Spurious Emissions

8.6.1 PC2

<input type="checkbox"/> PCC Channel :	<u>39750 (2506.0 MHz)</u>
<input type="checkbox"/> PCC BW(MHz) :	<u>20</u>
<input type="checkbox"/> PCC RB/ RB Offset :	<u>1/ 99</u>
<input type="checkbox"/> SCC Channel :	<u>39867 (2517.7 MHz)</u>
<input type="checkbox"/> SCC BW(MHz) :	<u>5</u>
<input type="checkbox"/> SCC RB/ RB Offset :	<u>1/ 0</u>
<input type="checkbox"/> DISTANCE:	<u>1 meters</u>
<input type="checkbox"/> LIMIT:	<u>-25.0 dBm</u>

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
5 012.00	-49.26	12.58	-59.01	3.59	V	-50.02
7 518.00	-40.84	10.84	-41.40	4.46	V	-35.02
10 024.00	-58.94	11.25	-54.55	5.28	H	-48.58

PCC Channel : 40546 (2585.6 MHz)
 PCC BW(MHz) : 20
 PCC RB/ RB Offset : 1/ 99
 SCC Channel : 40717 (2602.7 MHz)
 SCC BW(MHz) : 15
 SCC RB/ RB Offset : 1/ 0
 DISTANCE: 1 meters
 LIMIT: -25.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
5 171.20	-42.30	12.38	-50.25	3.67	V	-41.54
7 756.80	-43.26	11.40	-44.30	4.50	H	-37.40
10 342.40	59.02	11.42	63.99	5.39	V	70.02

PCC Channel : 41292 (2660.2 MHz)
 PCC BW(MHz) : 20
 PCC RB/ RB Offset : 1/ 99
 SCC Channel : 41490 (2680.0 MHz)
 SCC BW(MHz) : 20
 SCC RB/ RB Offset : 1/ 0
 DISTANCE: 1 meters
 LIMIT: -25.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
5 320.40	-36.12	13.00	-46.31	3.73	V	-37.04
7 980.60	-44.17	10.98	-42.85	4.59	H	-36.46
10 640.80	-57.44	11.20	-52.80	5.53	V	-47.13

8.7 Occupied Bandwidth

8.7.1 PC2

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	
5	40528	2583.8	QPSK	25/ 0	20	40645	2595.5	QPSK	100/ 0	22.962
10	40549	2585.9	QPSK	50/ 0	15	40669	2597.9	QPSK	75/ 0	23.197
10	40526	2583.6	QPSK	50/ 0	20	40670	2598.0	QPSK	100/ 0	27.744
15	40571	2588.1	QPSK	75/ 0	10	40691	2600.1	QPSK	50/ 0	23.124
15	40545	2585.5	QPSK	75/ 0	15	40695	2600.5	QPSK	75/ 0	28.405
15	40523	2583.3	QPSK	75/ 0	20	40694	2600.4	QPSK	100/ 0	32.672
20	40595	2590.5	QPSK	100/ 0	5	40712	2602.2	QPSK	25/ 0	22.947
20	40571	2588.1	QPSK	100/ 0	10	40715	2602.5	QPSK	50/ 0	27.804
20	40546	2585.6	QPSK	100/ 0	15	40717	2602.7	QPSK	75/ 0	32.688
20	40521	2583.1	QPSK	100/ 0	20	40719	2602.9	QPSK	100/ 0	37.636


PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	
5	40528	2583.8	16QAM	25/ 0	20	40645	2595.5	16QAM	100/ 0	22.832
10	40549	2585.9	16QAM	50/ 0	15	40669	2597.9	16QAM	75/ 0	23.101
10	40526	2583.6	16QAM	50/ 0	20	40670	2598.0	16QAM	100/ 0	27.699
15	40571	2588.1	16QAM	75/ 0	10	40691	2600.1	16QAM	50/ 0	23.111
15	40545	2585.5	16QAM	75/ 0	15	40695	2600.5	16QAM	75/ 0	28.428
15	40523	2583.3	16QAM	75/ 0	20	40694	2600.4	16QAM	100/ 0	32.718
20	40595	2590.5	16QAM	100/ 0	5	40712	2602.2	16QAM	25/ 0	22.924
20	40571	2588.1	16QAM	100/ 0	10	40715	2602.5	16QAM	50/ 0	27.830
20	40546	2585.6	16QAM	100/ 0	15	40717	2602.7	16QAM	75/ 0	32.707
20	40521	2583.1	16QAM	100/ 0	20	40719	2602.9	16QAM	100/ 0	37.551


PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	
5	40528	2583.8	64QAM	25/ 0	20	40645	2595.5	64QAM	100/ 0	22.847
10	40549	2585.9	64QAM	50/ 0	15	40669	2597.9	64QAM	75/ 0	23.137
10	40526	2583.6	64QAM	50/ 0	20	40670	2598.0	64QAM	100/ 0	27.723
15	40571	2588.1	64QAM	75/ 0	10	40691	2600.1	64QAM	50/ 0	23.236
15	40545	2585.5	64QAM	75/ 0	15	40695	2600.5	64QAM	75/ 0	28.303
15	40523	2583.3	64QAM	75/ 0	20	40694	2600.4	64QAM	100/ 0	32.626
20	40595	2590.5	64QAM	100/ 0	5	40712	2602.2	64QAM	25/ 0	22.956
20	40571	2588.1	64QAM	100/ 0	10	40715	2602.5	64QAM	50/ 0	27.849
20	40546	2585.6	64QAM	100/ 0	15	40717	2602.7	64QAM	75/ 0	32.656
20	40521	2583.1	64QAM	100/ 0	20	40719	2602.9	64QAM	100/ 0	37.608


PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	
5	40528	2583.8	256QAM	25/ 0	20	40645	2595.5	256QAM	100/ 0	22.865
10	40549	2585.9	256QAM	50/ 0	15	40669	2597.9	256QAM	75/ 0	23.200
10	40526	2583.6	256QAM	50/ 0	20	40670	2598.0	256QAM	100/ 0	27.698
15	40571	2588.1	256QAM	75/ 0	10	40691	2600.1	256QAM	50/ 0	23.195
15	40545	2585.5	256QAM	75/ 0	15	40695	2600.5	256QAM	75/ 0	28.348
15	40523	2583.3	256QAM	75/ 0	20	40694	2600.4	256QAM	100/ 0	32.599
20	40595	2590.5	256QAM	100/ 0	5	40712	2602.2	256QAM	25/ 0	22.937
20	40571	2588.1	256QAM	100/ 0	10	40715	2602.5	256QAM	50/ 0	27.757
20	40546	2585.6	256QAM	100/ 0	15	40717	2602.7	256QAM	75/ 0	32.661
20	40521	2583.1	256QAM	100/ 0	20	40719	2602.9	256QAM	100/ 0	37.673

Note:


In order to simplify the report, attached plots were only Max.Bandwidth(20+20)

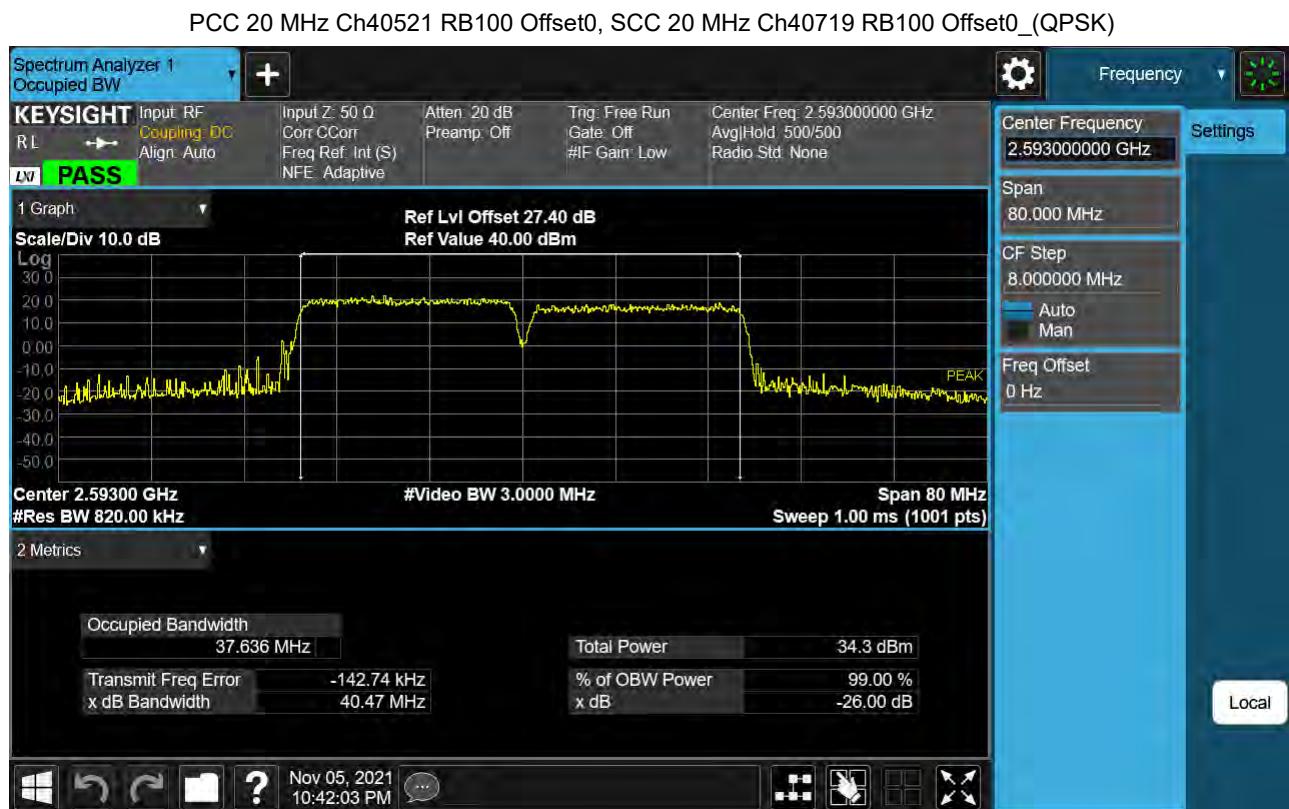

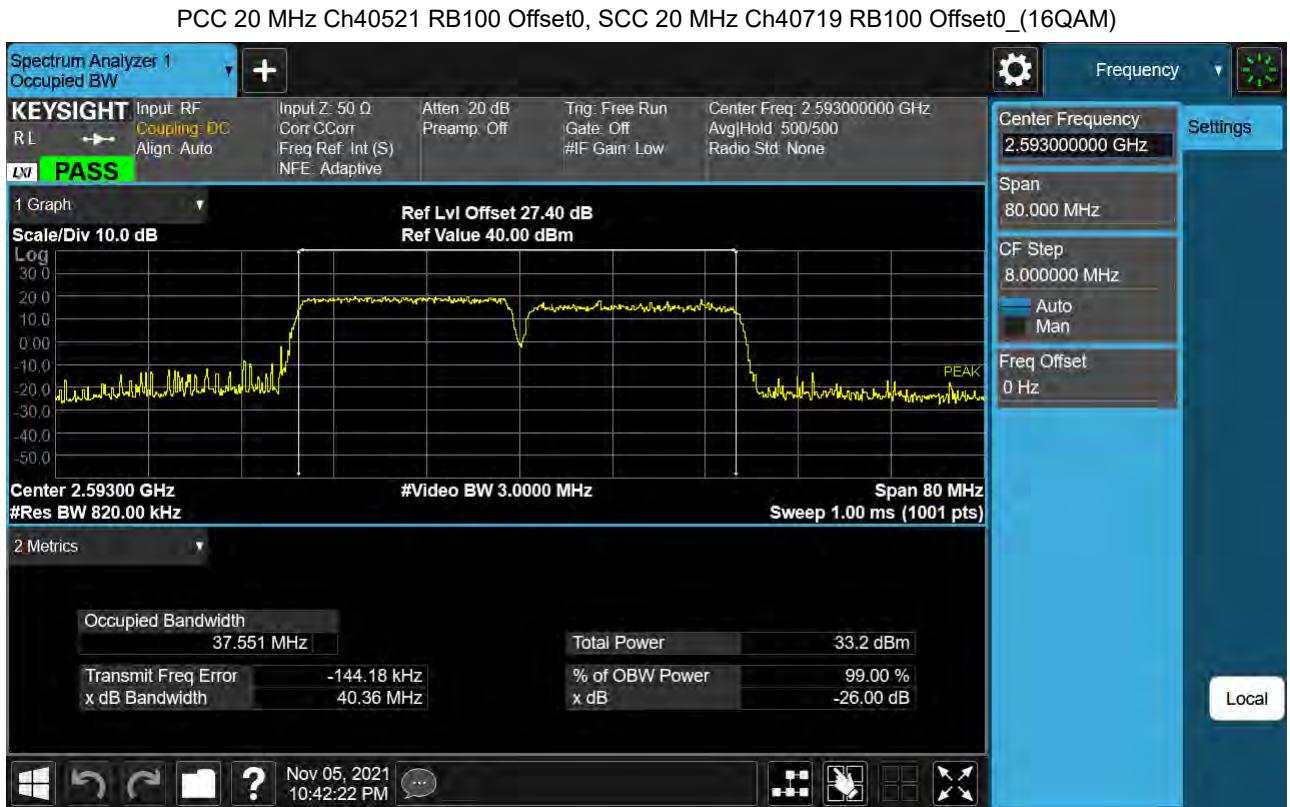

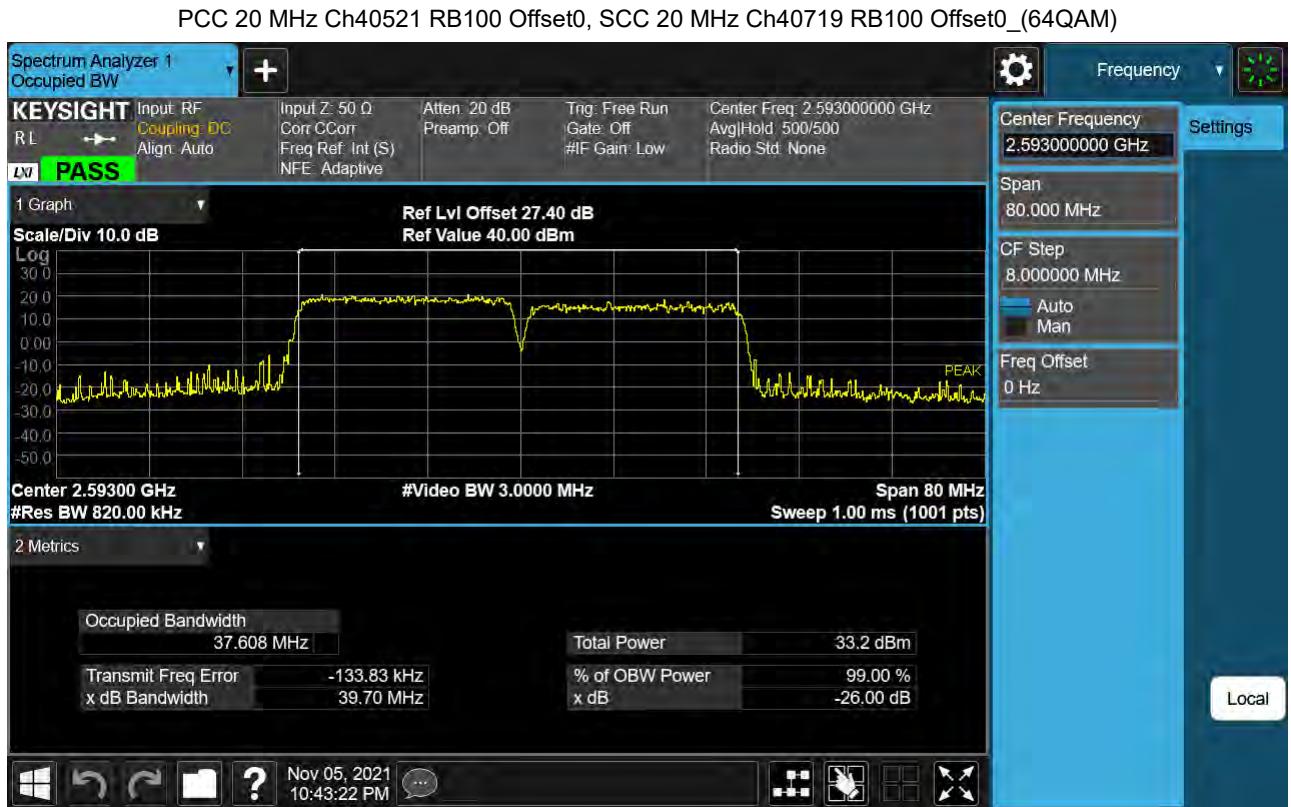

PCC 20 MHz Ch40521 RB100 Offset0, SCC 20 MHz Ch40719 RB100 Offset0_(256QAM)

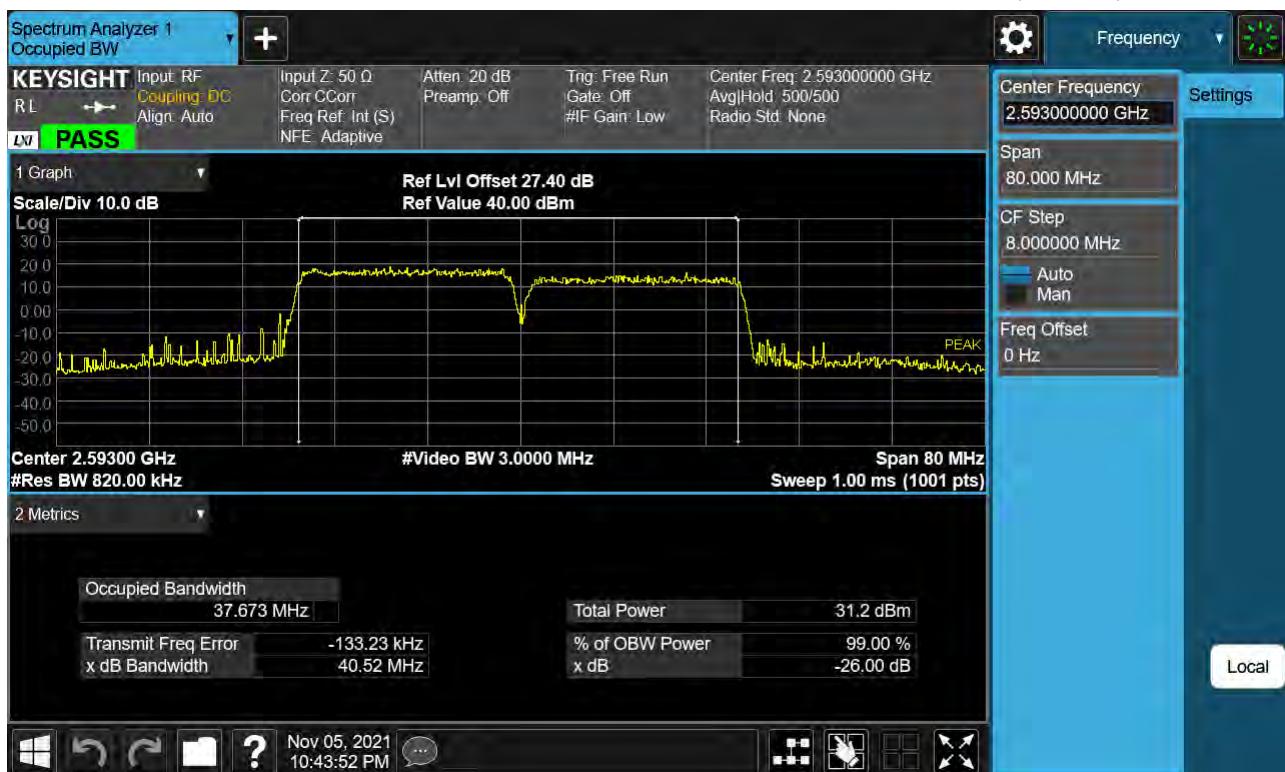

8.8 Peak- to- Average Ratio

8.8.1 PC2

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	
5	40528	2583.8	QPSK	25/ 0	20	40645	2595.5	QPSK	100/ 0	6.08
10	40549	2585.9	QPSK	50/ 0	15	40669	2597.9	QPSK	75/ 0	5.97
10	40526	2583.6	QPSK	50/ 0	20	40670	2598.0	QPSK	100/ 0	6.05
15	40571	2588.1	QPSK	75/ 0	10	40691	2600.1	QPSK	50/ 0	5.94
15	40545	2585.5	QPSK	75/ 0	15	40695	2600.5	QPSK	75/ 0	6.12
15	40523	2583.3	QPSK	75/ 0	20	40694	2600.4	QPSK	100/ 0	6.02
20	40595	2590.5	QPSK	100/ 0	5	40712	2602.2	QPSK	25/ 0	6.09
20	40571	2588.1	QPSK	100/ 0	10	40715	2602.5	QPSK	50/ 0	6.02
20	40546	2585.6	QPSK	100/ 0	15	40717	2602.7	QPSK	75/ 0	5.98
20	40521	2583.1	QPSK	100/ 0	20	40719	2602.9	QPSK	100/ 0	6.32


PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	
5	40528	2583.8	16QAM	25/ 0	20	40645	2595.5	16QAM	100/ 0	6.64
10	40549	2585.9	16QAM	50/ 0	15	40669	2597.9	16QAM	75/ 0	6.70
10	40526	2583.6	16QAM	50/ 0	20	40670	2598.0	16QAM	100/ 0	6.64
15	40571	2588.1	16QAM	75/ 0	10	40691	2600.1	16QAM	50/ 0	6.65
15	40545	2585.5	16QAM	75/ 0	15	40695	2600.5	16QAM	75/ 0	6.65
15	40523	2583.3	16QAM	75/ 0	20	40694	2600.4	16QAM	100/ 0	6.64
20	40595	2590.5	16QAM	100/ 0	5	40712	2602.2	16QAM	25/ 0	6.70
20	40571	2588.1	16QAM	100/ 0	10	40715	2602.5	16QAM	50/ 0	6.62
20	40546	2585.6	16QAM	100/ 0	15	40717	2602.7	16QAM	75/ 0	6.65
20	40521	2583.1	16QAM	100/ 0	20	40719	2602.9	16QAM	100/ 0	6.81

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	
5	40528	2583.8	64QAM	25/ 0	20	40645	2595.5	64QAM	100/ 0	6.69
10	40549	2585.9	64QAM	50/ 0	15	40669	2597.9	64QAM	75/ 0	6.67
10	40526	2583.6	64QAM	50/ 0	20	40670	2598.0	64QAM	100/ 0	6.73
15	40571	2588.1	64QAM	75/ 0	10	40691	2600.1	64QAM	50/ 0	6.69
15	40545	2585.5	64QAM	75/ 0	15	40695	2600.5	64QAM	75/ 0	6.71
15	40523	2583.3	64QAM	75/ 0	20	40694	2600.4	64QAM	100/ 0	6.69
20	40595	2590.5	64QAM	100/ 0	5	40712	2602.2	64QAM	25/ 0	6.71
20	40571	2588.1	64QAM	100/ 0	10	40715	2602.5	64QAM	50/ 0	6.36
20	40546	2585.6	64QAM	100/ 0	15	40717	2602.7	64QAM	75/ 0	6.67
20	40521	2583.1	64QAM	100/ 0	20	40719	2602.9	64QAM	100/ 0	6.79

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/ Offset	
5	40528	2583.8	256QAM	25/ 0	20	40645	2595.5	256QAM	100/ 0	7.11
10	40549	2585.9	256QAM	50/ 0	15	40669	2597.9	256QAM	75/ 0	7.10
10	40526	2583.6	256QAM	50/ 0	20	40670	2598.0	256QAM	100/ 0	7.05
15	40571	2588.1	256QAM	75/ 0	10	40691	2600.1	256QAM	50/ 0	7.02
15	40545	2585.5	256QAM	75/ 0	15	40695	2600.5	256QAM	75/ 0	7.10
15	40523	2583.3	256QAM	75/ 0	20	40694	2600.4	256QAM	100/ 0	7.05
20	40595	2590.5	256QAM	100/ 0	5	40712	2602.2	256QAM	25/ 0	7.07
20	40571	2588.1	256QAM	100/ 0	10	40715	2602.5	256QAM	50/ 0	7.08
20	40546	2585.6	256QAM	100/ 0	15	40717	2602.7	256QAM	75/ 0	7.04
20	40521	2583.1	256QAM	100/ 0	20	40719	2602.9	256QAM	100/ 0	7.19

Note:

In order to simplify the report, attached plots were only Max.Bandwidth(20+20)

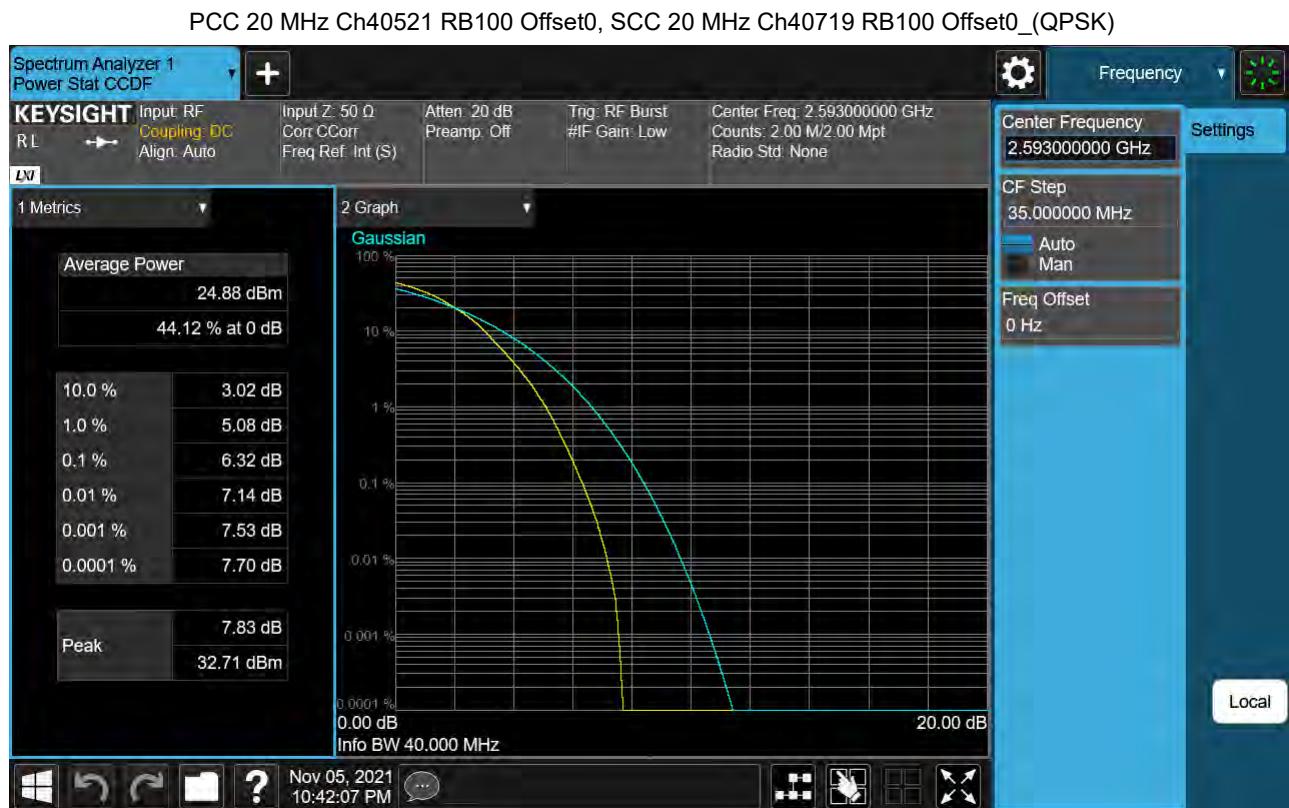



PCC 20 MHz Ch40521 RB100 Offset0, SCC 20 MHz Ch40719 RB100 Offset0_(64QAM)



PCC 20 MHz Ch40521 RB100 Offset0, SCC 20 MHz Ch40719 RB100 Offset0_(256QAM)



9. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2111-FC057-P