

Appendix B. – SAR Test Plots

Test Laboratory: HCT CO., LTD
EUT Type: Tablet
Liquid Temperature: 20.1 °C
Ambient Temperature: 20.2 °C
Test Date: 05/02/2023
Plot No.: 1


Communication System: UID 0, 2450MHz FCC (0); Frequency: 2462 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.817$ S/m; $\epsilon_r = 38.404$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(8.59, 8.59, 8.59) @ 2462 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

802.11b Body Left 1Mbps 11ch/Area Scan (71x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.271 W/kg

802.11b Body Left 1Mbps 11ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.336 W/kg
SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.086 W/kg
Maximum value of SAR (measured) = 0.269 W/kg

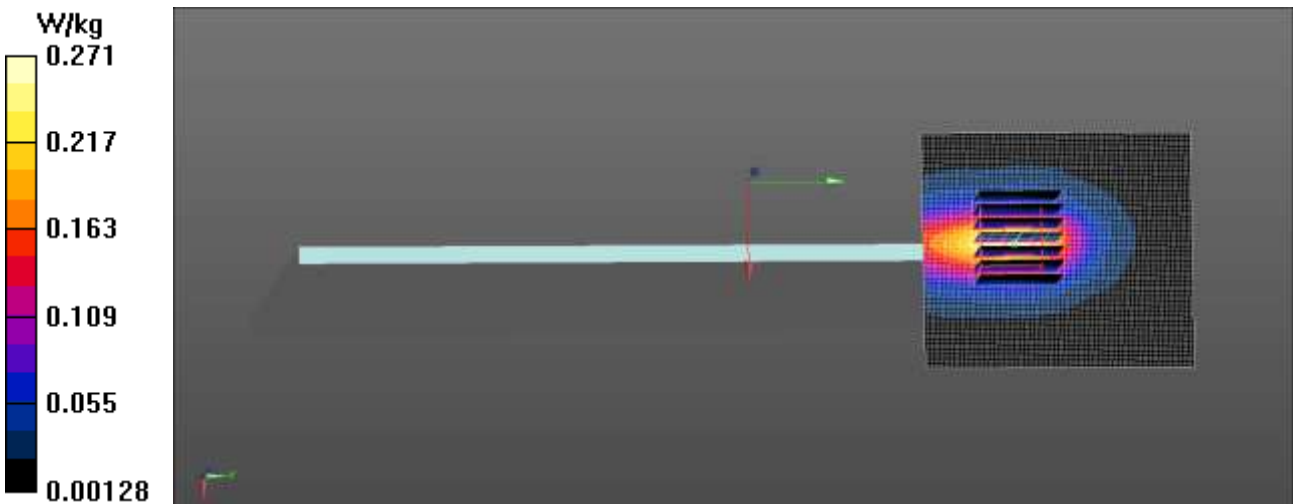

Test Laboratory: HCT CO., LTD
EUT Type: Tablet
Liquid Temperature: 20.1 °C
Ambient Temperature: 20.2 °C
Test Date: 05/02/2023
Plot No.: 2


Communication System: UID 0, 2450MHz FCC (0); Frequency: 2462 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2462$ MHz; $\sigma = 1.817$ S/m; $\epsilon_r = 38.404$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(8.59, 8.59, 8.59) @ 2462 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

802.11b Body Left 1Mbps 11ch/Area Scan (81x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.271 W/kg

802.11b Body Left 1Mbps 11ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.310 W/kg
SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.078 W/kg
Maximum value of SAR (measured) = 0.243 W/kg

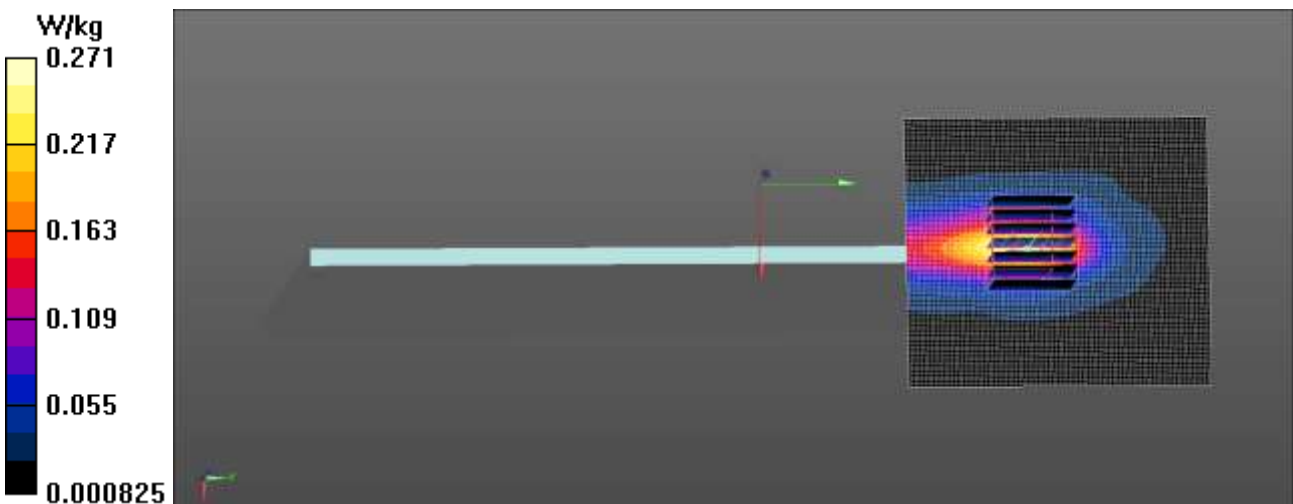

Test Laboratory: HCT CO., LTD
EUT Type: Tablet
Liquid Temperature: 20.1 °C
Ambient Temperature: 20.2 °C
Test Date: 05/02/2023
Plot No.: 3


Communication System: UID 0, 2450MHz FCC (0); Frequency: 2437 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 38.502$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(8.59, 8.59, 8.59) @ 2437 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

802.11b Body Right 1Mbps 6ch/Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.691 W/kg

802.11b Body Right 1Mbps 6ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.4570 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.03 W/kg
SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.156 W/kg
Maximum value of SAR (measured) = 0.779 W/kg

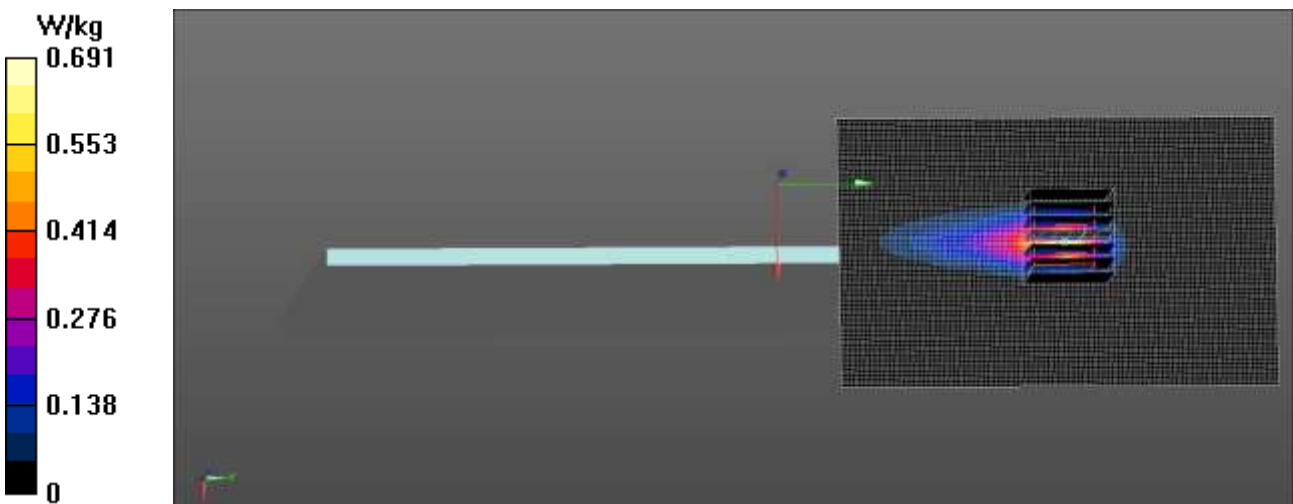

Test Laboratory: HCT CO., LTD
EUT Type: Tablet
Liquid Temperature: 20.3 °C
Ambient Temperature: 20.4 °C
Test Date: 04/10/2023
Plot No.: 4


Communication System: UID 0, 2450MHz FCC (0); Frequency: 2437 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.801$ S/m; $\epsilon_r = 38.605$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(8.59, 8.59, 8.59) @ 2437 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

802.11b Body Right 1Mbps 6ch/Area Scan (81x131x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.582 W/kg

802.11b Body Right 1Mbps 6ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.3890 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 0.826 W/kg
SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.124 W/kg
Maximum value of SAR (measured) = 0.609 W/kg

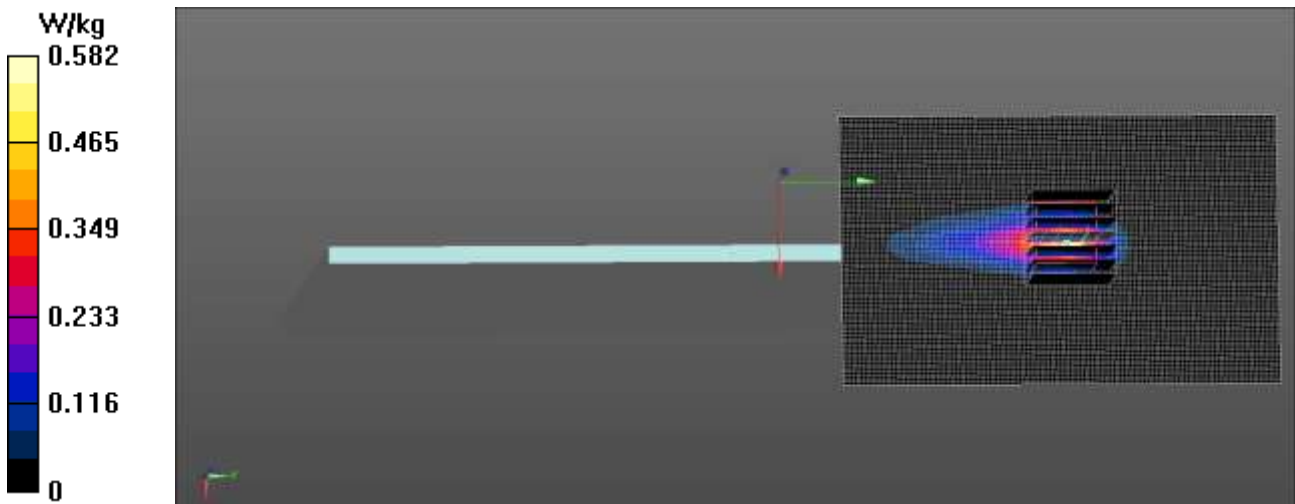

Test Laboratory: HCT CO., LTD
EUT Type: Tablet
Liquid Temperature: 20.3 °C
Ambient Temperature: 20.4 °C
Test Date: 04/17/2023
Plot No.: 5


Communication System: UID 0, WIFI 5GHz (0); Frequency: 5270 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5270$ MHz; $\sigma = 4.768$ S/m; $\epsilon_r = 36.706$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(6.18, 6.18, 6.18) @ 5270 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

802.11n40 Body Right MCS8 54ch/Area Scan (10x14x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.890 W/kg

802.11n40 Body Right MCS8 54ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 12.48 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 1.64 W/kg
SAR(1 g) = 0.539 W/kg; SAR(10 g) = 0.200 W/kg
Maximum value of SAR (measured) = 1.14 W/kg

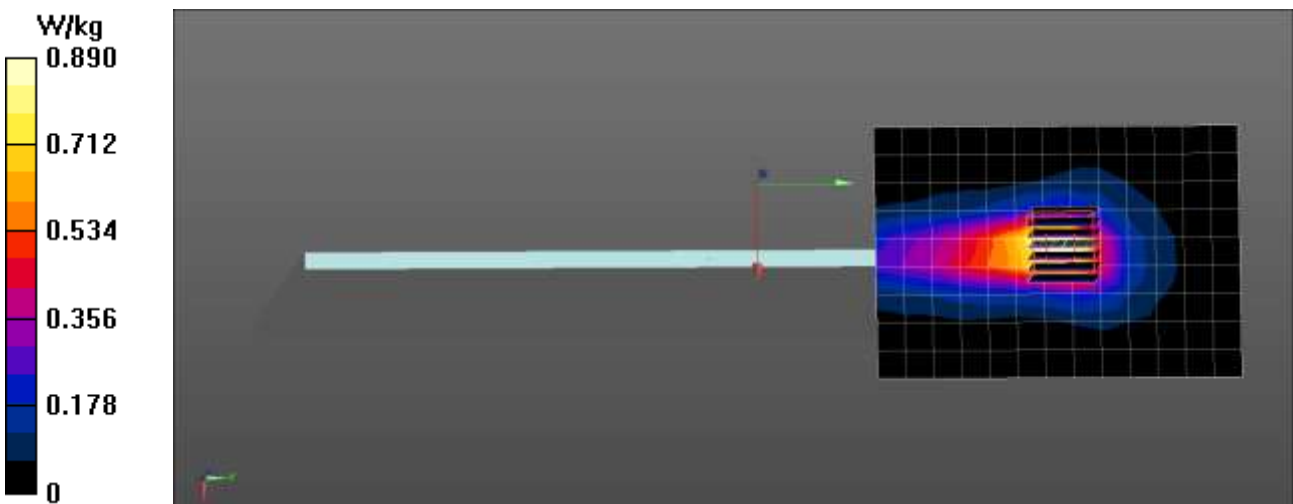

Test Laboratory: HCT CO., LTD
 EUT Type: Tablet
 Liquid Temperature: 20.1 °C
 Ambient Temperature: 20.2 °C
 Test Date: 05/10/2023
 Plot No.: 6


Communication System: UID 0, WIFI 5GHz (0); Frequency: 5855 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5855 \text{ MHz}$; $\sigma = 5.129 \text{ S/m}$; $\epsilon_r = 35.8$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3768; ConvF(4.75, 4.75, 4.75) @ 5855 MHz; Calibrated: 2022-06-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2022-08-17
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

802.11ac80 Body Rear MCS0 171ch/Area Scan (23x9x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 2.07 W/kg

802.11ac80 Body Rear MCS0 171ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 12.91 V/m; Power Drift = -0.16 dB
 Peak SAR (extrapolated) = 6.20 W/kg
SAR(1 g) = 0.879 W/kg; SAR(10 g) = 0.181 W/kg
 Maximum value of SAR (measured) = 2.63 W/kg

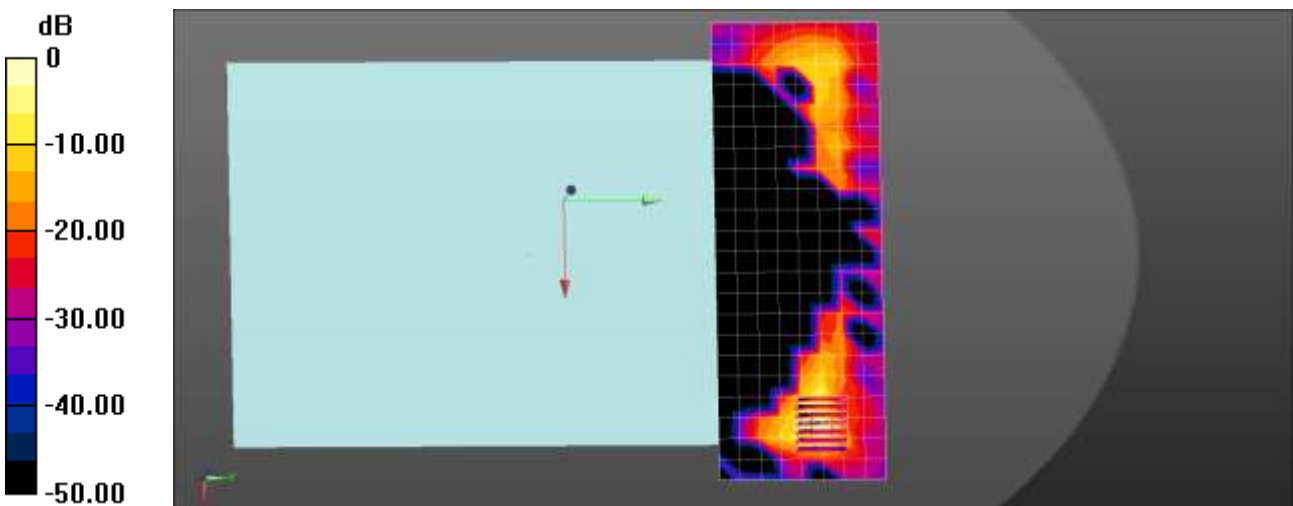

0 dB = 2.63 W/kg = 4.20 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Tablet
 Liquid Temperature: 21.3 °C
 Ambient Temperature: 21.4 °C
 Test Date: 04/26/2023
 Plot No.: 7


Communication System: UID 0, WIFI 5GHz (0); Frequency: 5855 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5855 \text{ MHz}$; $\sigma = 5.205 \text{ S/m}$; $\epsilon_r = 36.036$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7654; ConvF(5.35, 5.35, 5.35) @ 5855 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (4);

802.11ac80 Body Rear MCS0 171ch/Area Scan (23x10x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 1.01 W/kg

802.11ac80 Body Rear MCS0 171ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 9.329 V/m; Power Drift = -0.08 dB
 Peak SAR (extrapolated) = 6.29 W/kg
SAR(1 g) = 0.719 W/kg; SAR(10 g) = 0.148 W/kg
 Maximum value of SAR (measured) = 2.98 W/kg

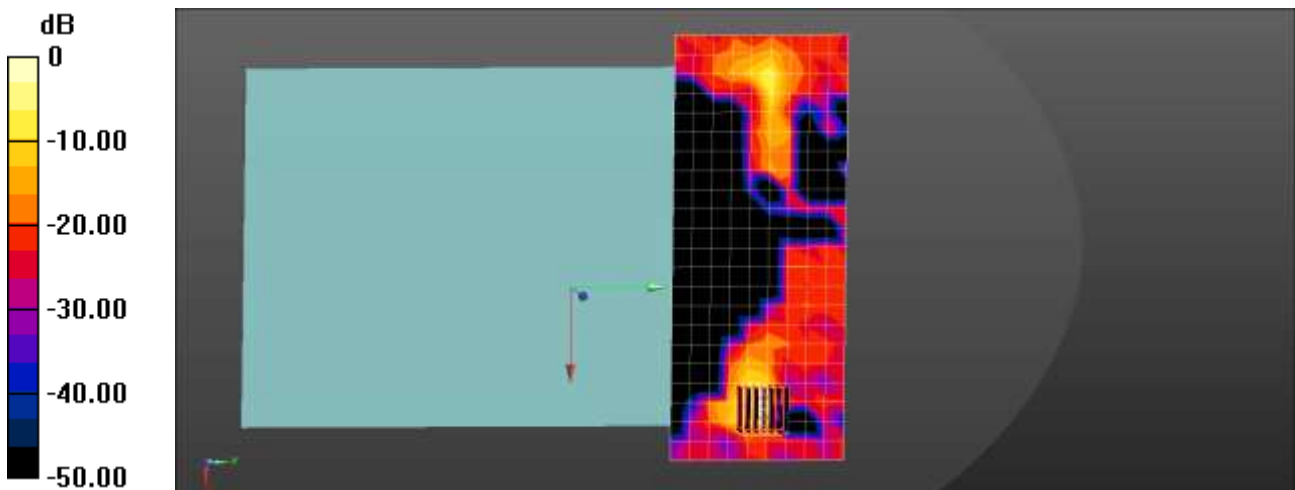

0 dB = 2.98 W/kg = 4.74 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Tablet
Liquid Temperature: 20.3 °C
Ambient Temperature: 20.4 °C
Test Date: 04/11/2023
Plot No.: 8


Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.743$ S/m; $\epsilon_r = 38.13$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(8.59, 8.59, 8.59) @ 2441 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Bluetooth Body Right DH5 39ch/Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.499 W/kg

Bluetooth Body Right DH5 39ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.644 W/kg
SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.176 W/kg
Maximum value of SAR (measured) = 0.521 W/kg

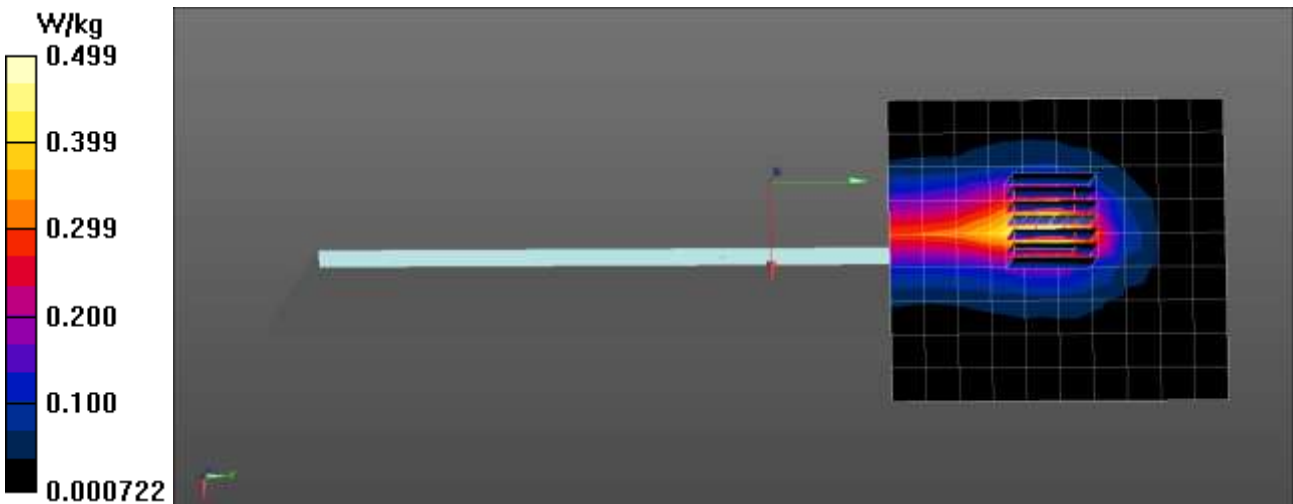

Test Laboratory: HCT CO., LTD
EUT Type: Tablet
Liquid Temperature: 20.3 °C
Ambient Temperature: 20.4 °C
Test Date: 04/11/2023
Plot No.: 9


Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.743$ S/m; $\epsilon_r = 38.13$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(8.59, 8.59, 8.59) @ 2441 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Bluetooth Body Right DH5 39ch/Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.314 W/kg

Bluetooth Body Right DH5 39ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.759 W/kg
SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.100 W/kg
Maximum value of SAR (measured) = 0.517 W/kg

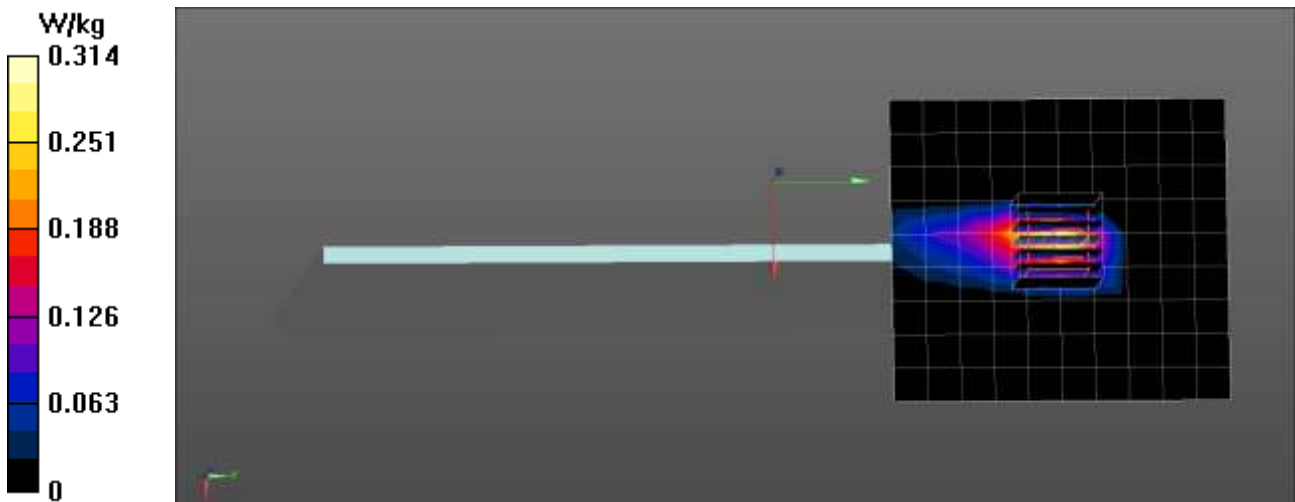

Test Laboratory: HCT CO., LTD
EUT Type: Tablet
Liquid Temperature: 20.5 °C
Ambient Temperature: 20.6 °C
Test Date: 05/03/2023
Plot No.: 10


Communication System: UID 0, Bluetooth (0); Frequency: 2440 MHz; Duty Cycle: 1:1.
Medium parameters used: $f = 2440 \text{ MHz}$; $\sigma = 1.734 \text{ S/m}$; $\epsilon_r = 38.076$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(8.59, 8.59, 8.59) @ 2440 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Bluetooth Body Right 125K 19ch/Area Scan (8x9x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.452 W/kg

Bluetooth Body Right 125K 19ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 1.767 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.18 W/kg
SAR(1 g) = 0.408 W/kg; SAR(10 g) = 0.164 W/kg
Maximum value of SAR (measured) = 0.827 W/kg

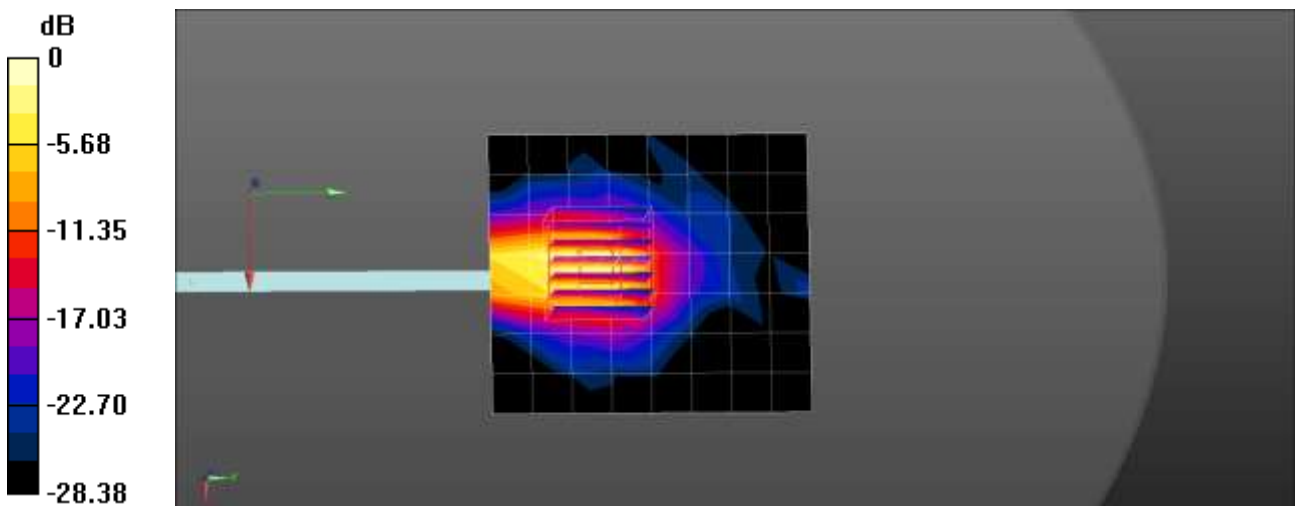

0 dB = 0.827 W/kg = -0.82 dBW/kg

Appendix C. – Dipole Verification Plots

■ **Verification Data (2450 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.1 °C
Test Date: 05/02/2023


Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.803$ S/m; $\epsilon_r = 38.45$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(8.59, 8.59, 8.59) @ 2450 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

2450MHz Head Verification/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 3.55 W/kg

2450MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 46.24 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 5.27 W/kg
SAR(1 g) = 2.57 W/kg; SAR(10 g) = 1.27 W/kg
Maximum value of SAR (measured) = 4.19 W/kg

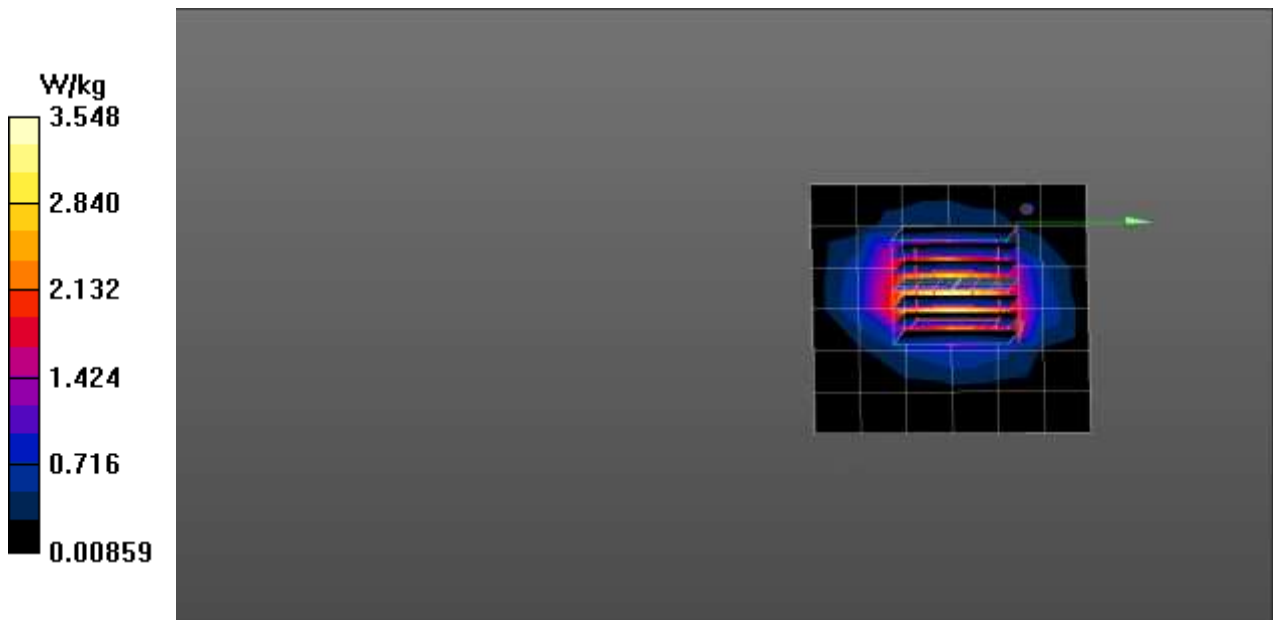

■ **Verification Data (2450 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.3 °C
Test Date: 04/10/2023


Communication System: UID 0, CW (0); Frequency: 2450 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.817$ S/m; $\epsilon_r = 38.553$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(8.59, 8.59, 8.59) @ 2450 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

2450MHz Head Verification/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 3.72 W/kg

2450MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 46.92 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 5.94 W/kg
SAR(1 g) = 2.84 W/kg; SAR(10 g) = 1.39 W/kg
Maximum value of SAR (measured) = 4.71 W/kg

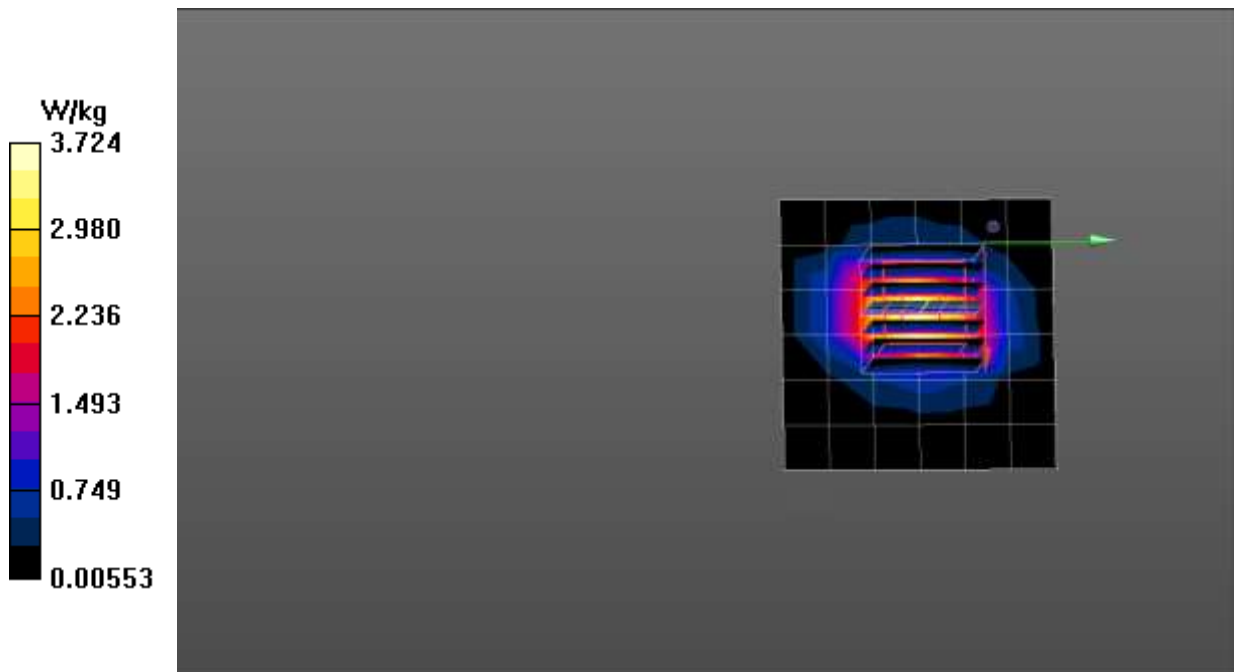

■ **Verification Data (2450 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.3 °C
Test Date: 04/11/2023


Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.754$ S/m; $\epsilon_r = 38.103$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(8.59, 8.59, 8.59) @ 2450 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

2450MHz Head Verification/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 3.51 W/kg

2450MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 46.46 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 5.13 W/kg
SAR(1 g) = 2.49 W/kg; SAR(10 g) = 1.24 W/kg
Maximum value of SAR (measured) = 4.08 W/kg

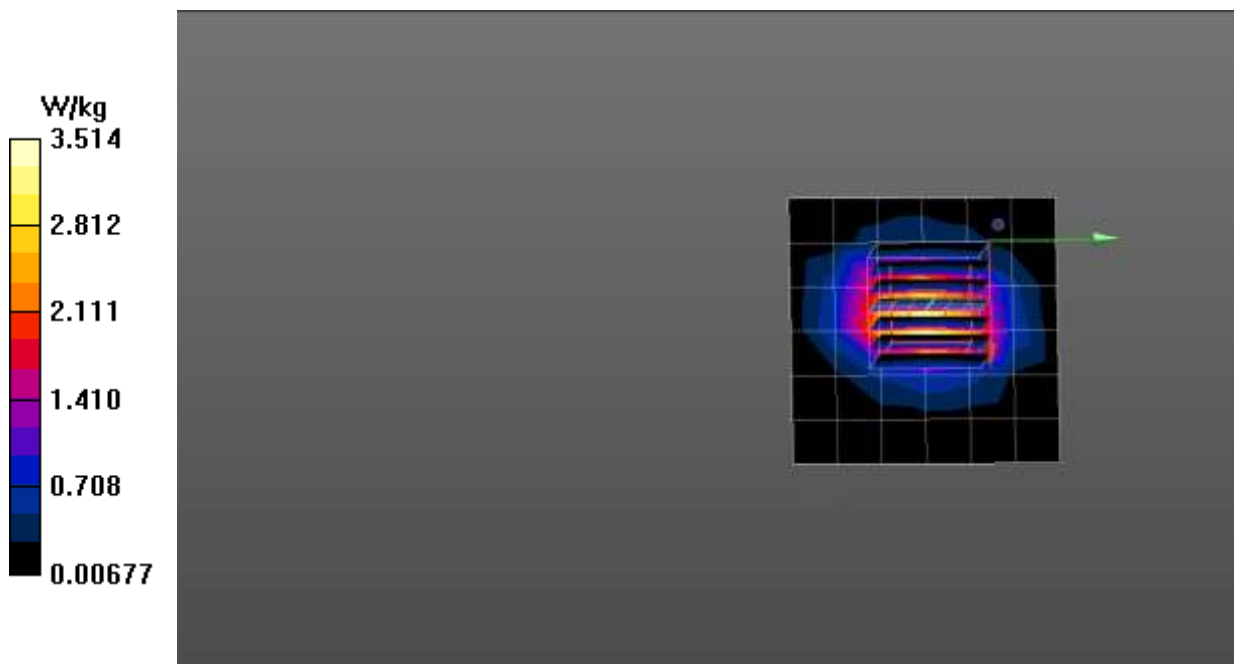

■ **Verification Data (2450 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.5 °C
Test Date: 04/12/2023


Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.735$ S/m; $\epsilon_r = 37.973$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(8.59, 8.59, 8.59) @ 2450 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

2450MHz Head Verification/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 3.43 W/kg

2450MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 46.52 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 5.17 W/kg
SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.23 W/kg
Maximum value of SAR (measured) = 4.10 W/kg

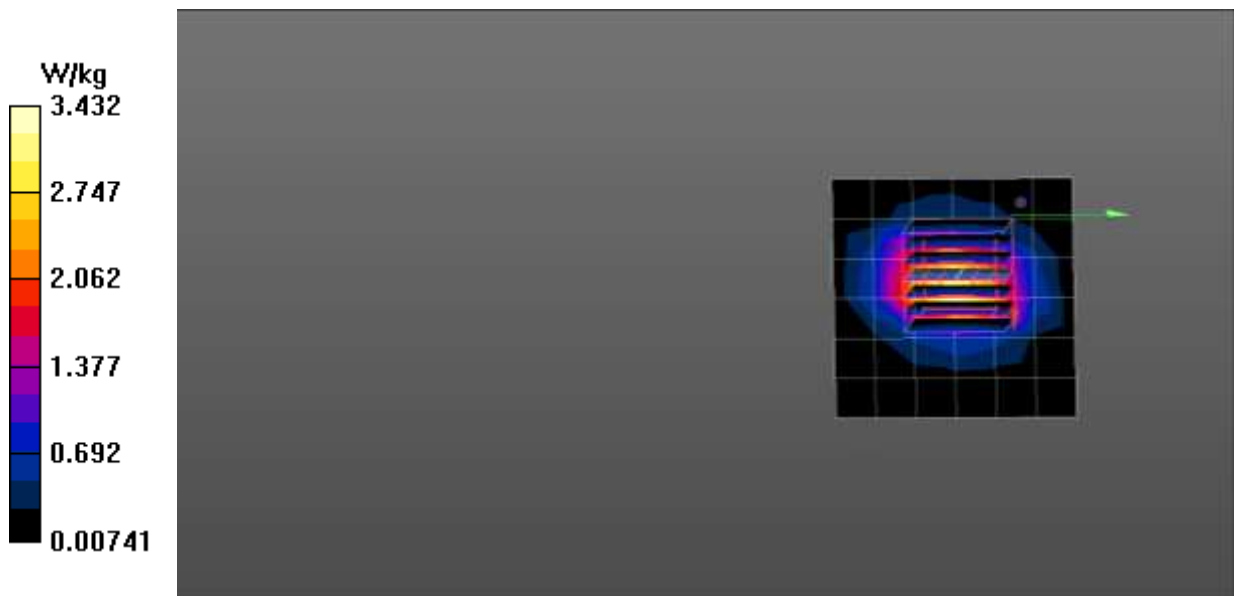

■ **Verification Data (2450 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.5 °C
Test Date: 05/03/2023


Communication System: UID 0, CW (0); Frequency: 2450 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.747$ S/m; $\epsilon_r = 38.049$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(8.59, 8.59, 8.59) @ 2450 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

2450MHz Head Verification/Area Scan (7x8x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 3.81 W/kg

2450MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 43.45 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 5.09 W/kg
SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.17 W/kg
Maximum value of SAR (measured) = 4.08 W/kg

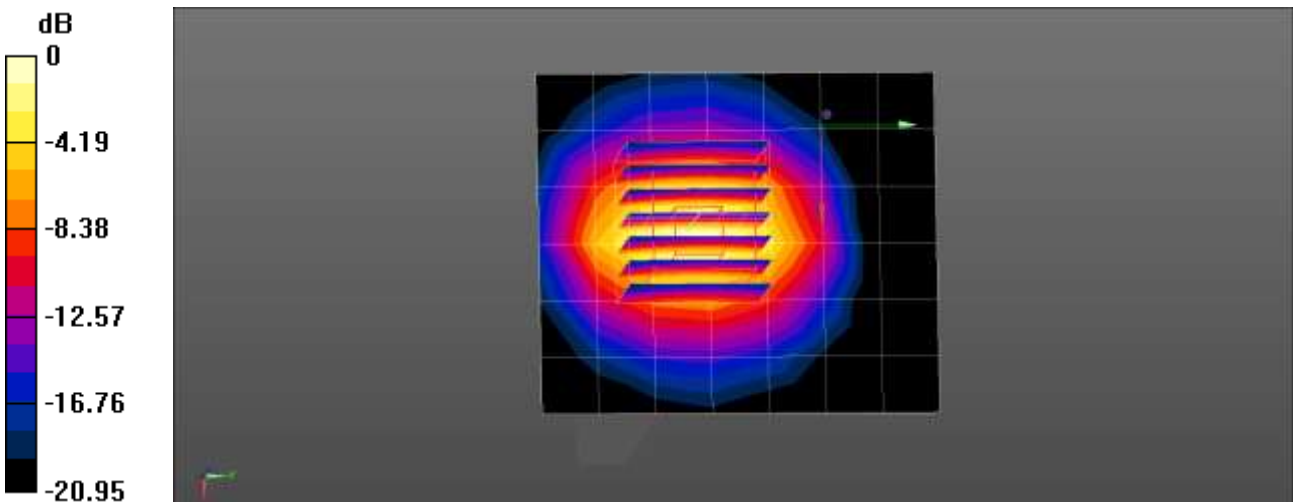

■ **Verification Data (5250 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.3 °C
Test Date: 04/17/2023


Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5250$ MHz; $\sigma = 4.73$ S/m; $\epsilon_r = 36.728$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(6.18, 6.18, 6.18) @ 5250 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

5250MHz Head Verification/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 8.22 W/kg

5250MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 45.75 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 15.1 W/kg
SAR(1 g) = 4.35 W/kg; SAR(10 g) = 1.39 W/kg
Maximum value of SAR (measured) = 9.77 W/kg

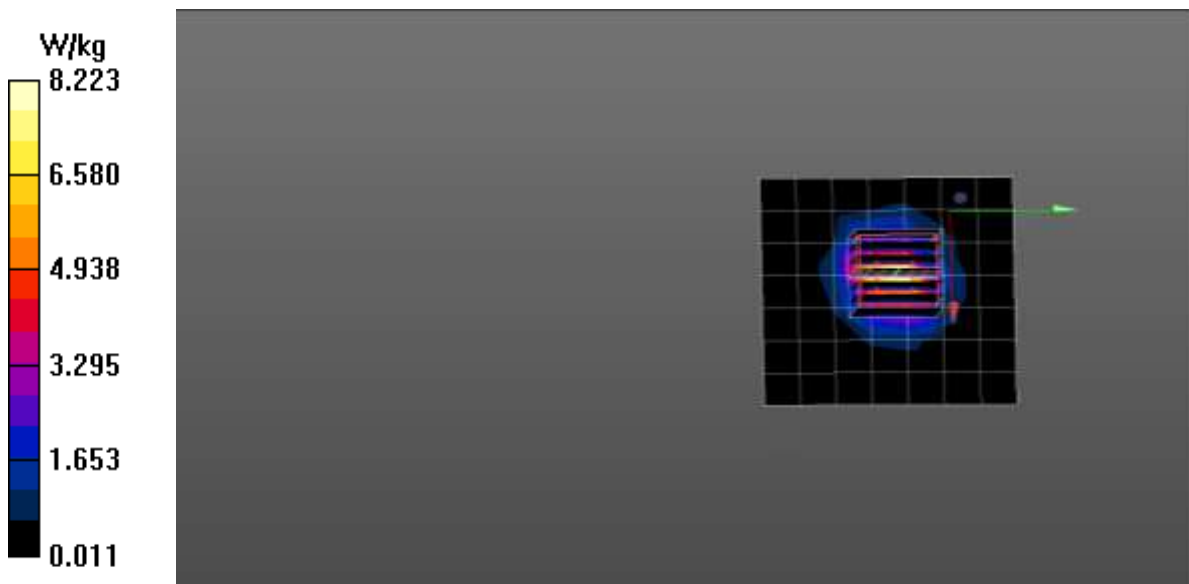

■ **Verification Data (5250 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.7 °C
Test Date: 04/20/2023


Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5250$ MHz; $\sigma = 4.726$ S/m; $\epsilon_r = 36.728$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(6.18, 6.18, 6.18) @ 5250 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

5250MHz Head Verification/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 8.42 W/kg

5250MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 43.49 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 16.0 W/kg
SAR(1 g) = 3.86 W/kg; SAR(10 g) = 1.14 W/kg
Maximum value of SAR (measured) = 9.34 W/kg

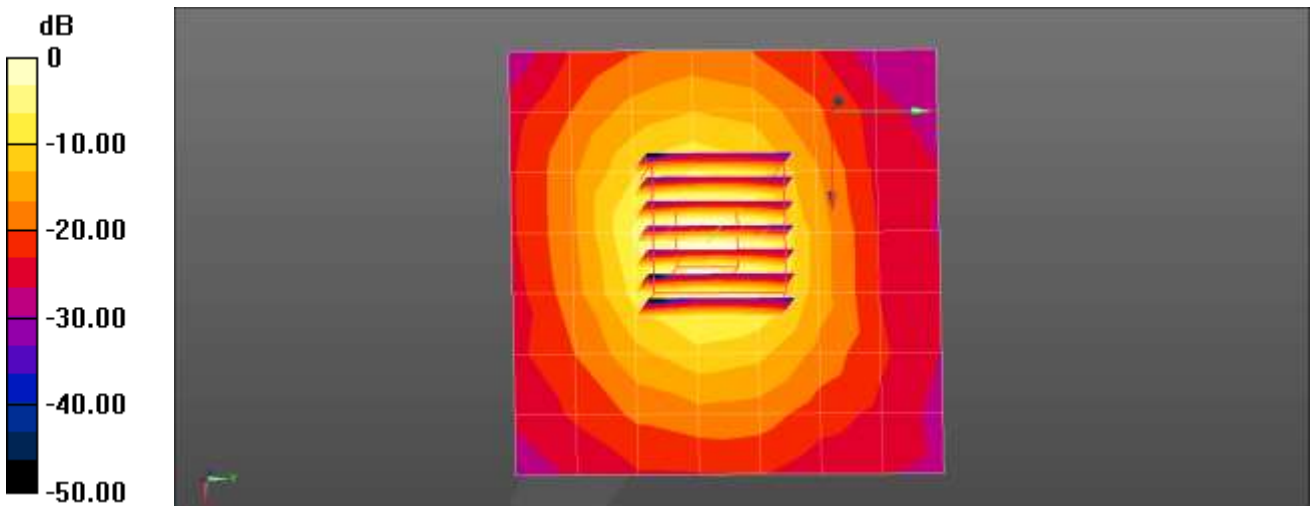

■ **Verification Data (5600 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.3 °C
Test Date: 04/17/2023


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.035$ S/m; $\epsilon_r = 36.43$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(5.43, 5.43, 5.43) @ 5600 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

5600MHz Head Verification/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 7.40 W/kg

5600MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 43.02 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 14.6 W/kg
SAR(1 g) = 3.93 W/kg; SAR(10 g) = 1.27 W/kg
Maximum value of SAR (measured) = 9.02 W/kg

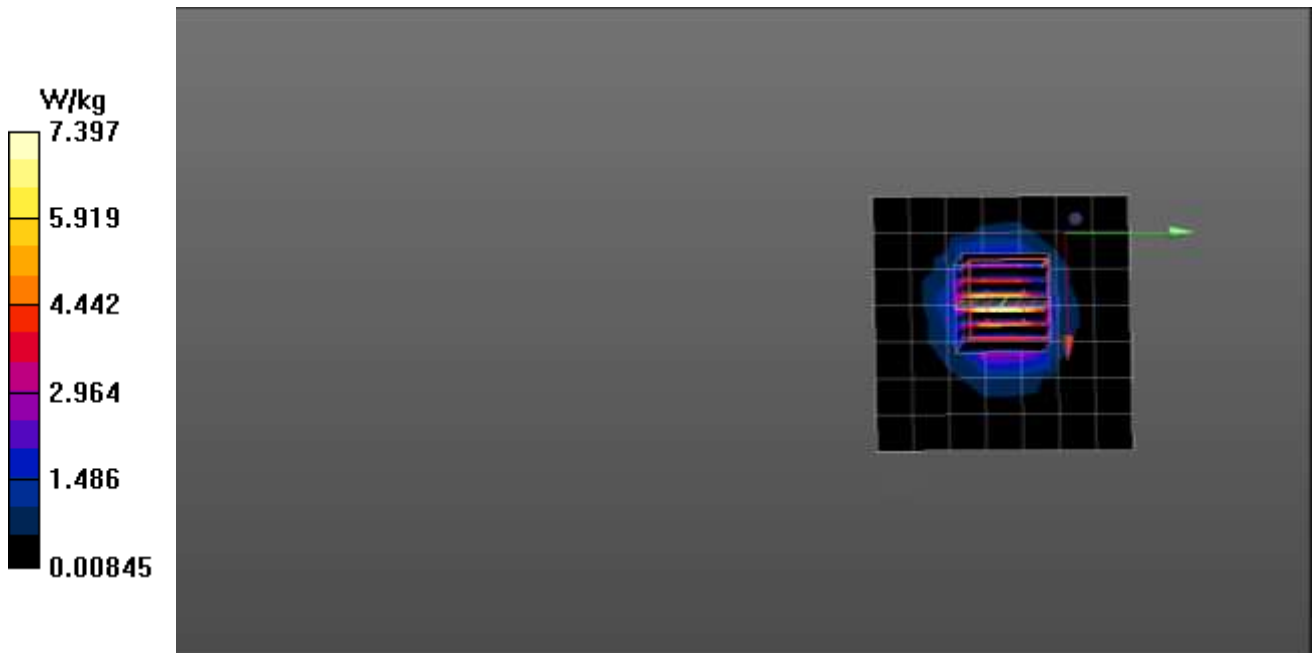

■ **Verification Data (5600 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.2 °C
Test Date: 04/21/2023


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 5.037$ S/m; $\epsilon_r = 36.427$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(5.43, 5.43, 5.43) @ 5600 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

5600MHz Head Verification/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 9.29 W/kg

5600MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 43.95 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 18.4 W/kg
SAR(1 g) = 4.05 W/kg; SAR(10 g) = 1.19 W/kg
Maximum value of SAR (measured) = 10.1 W/kg

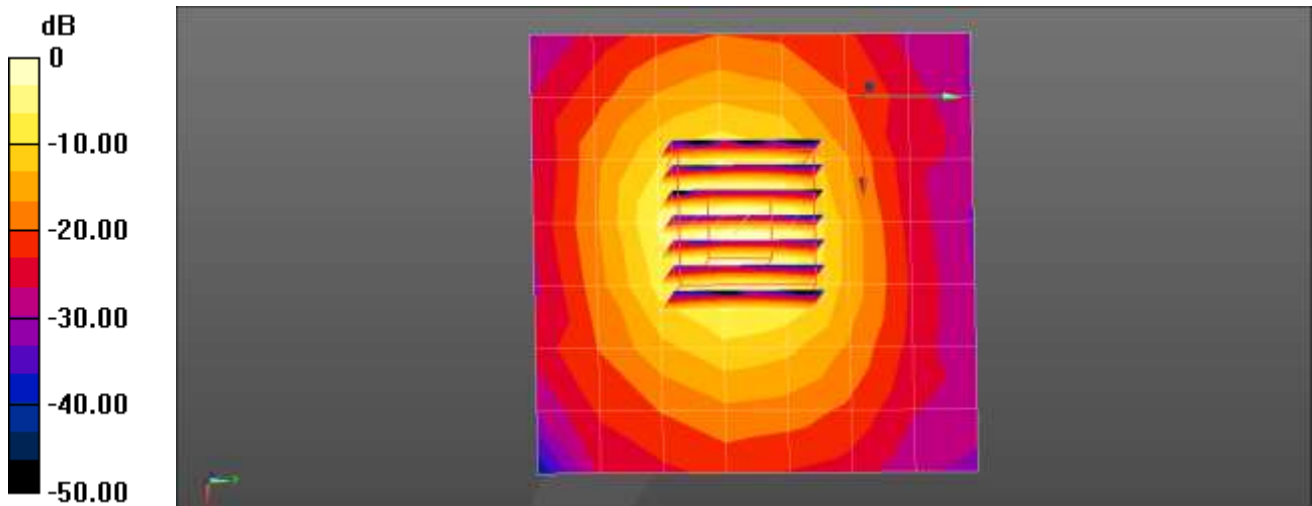

■ **Verification Data (5750 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.3 °C
Test Date: 04/17/2023


Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5750$ MHz; $\sigma = 5.249$ S/m; $\epsilon_r = 36.23$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(5.4, 5.4, 5.4) @ 5750 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

5750MHz Head Verification/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 7.09 W/kg

5750MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 41.54 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 14.5 W/kg
SAR(1 g) = 3.77 W/kg; SAR(10 g) = 1.23 W/kg
Maximum value of SAR (measured) = 8.77 W/kg

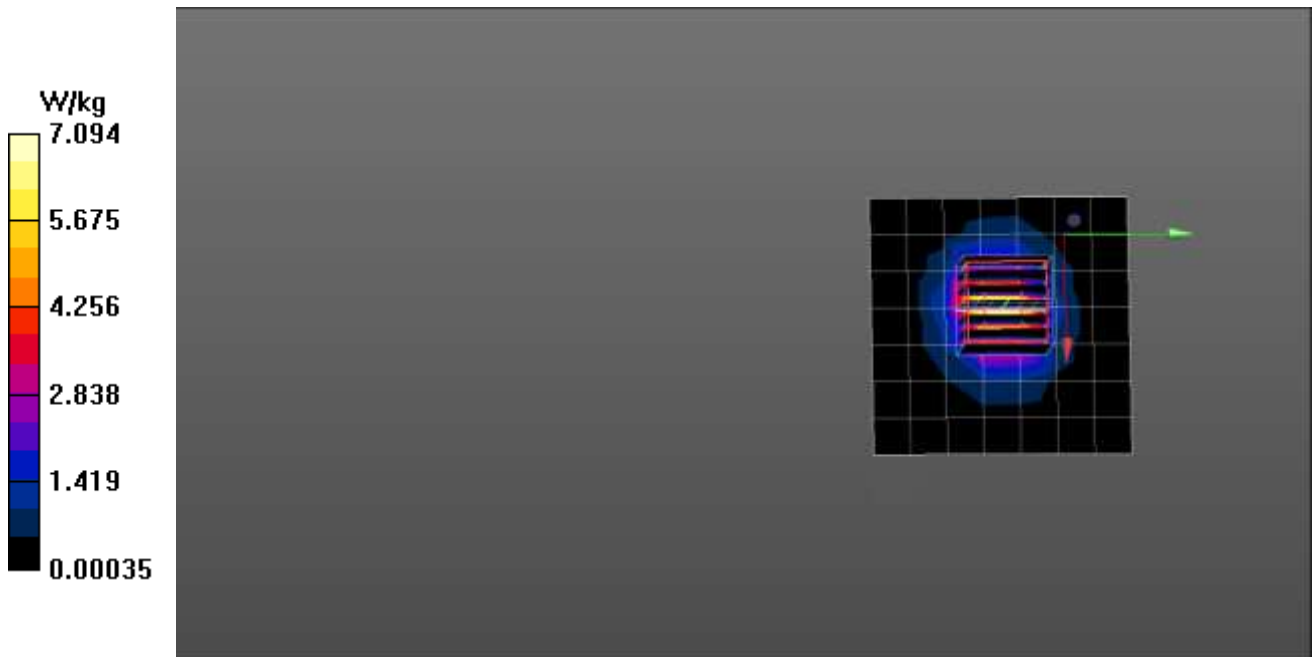

■ **Verification Data (5750 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.2 °C
Test Date: 04/24/2023


Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5750$ MHz; $\sigma = 5.239$ S/m; $\epsilon_r = 36.175$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(5.4, 5.4, 5.4) @ 5750 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

5750MHz Head Verification/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 8.28 W/kg

5750MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 43.88 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 19.0 W/kg
SAR(1 g) = 3.88 W/kg; SAR(10 g) = 1.12 W/kg
Maximum value of SAR (measured) = 9.98 W/kg

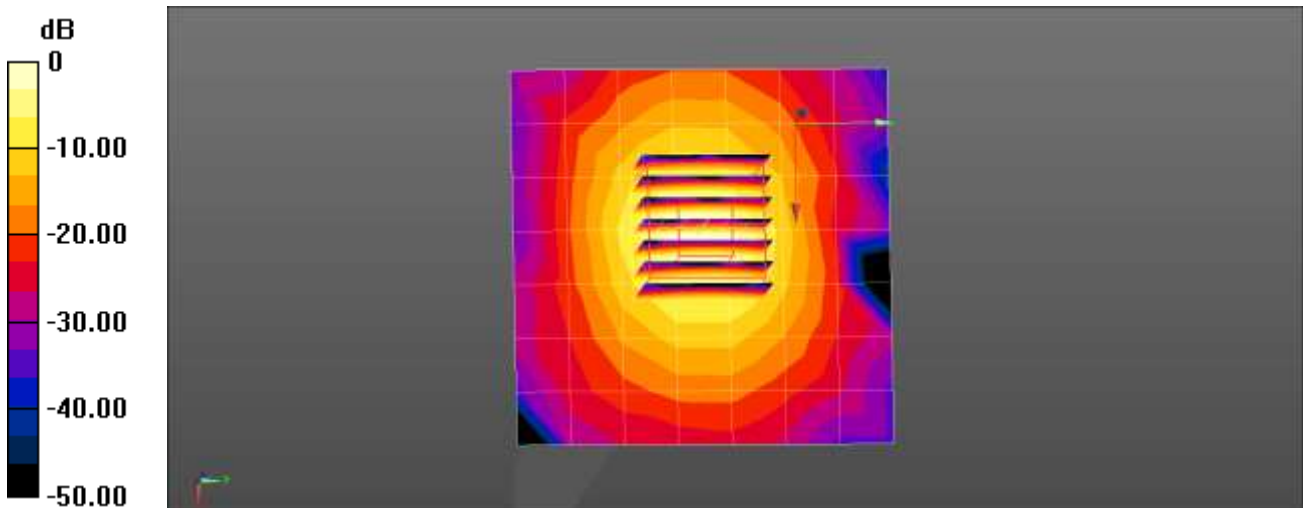

■ **Verification Data (5800 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.3 °C
Test Date: 04/17/2023


Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.211$ S/m; $\epsilon_r = 36.225$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(5.35, 5.35, 5.35) @ 5800 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

5800MHz Head Verification/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 7.25 W/kg

5800MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 42.50 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 15.3 W/kg
SAR(1 g) = 3.91 W/kg; SAR(10 g) = 1.26 W/kg
Maximum value of SAR (measured) = 9.17 W/kg

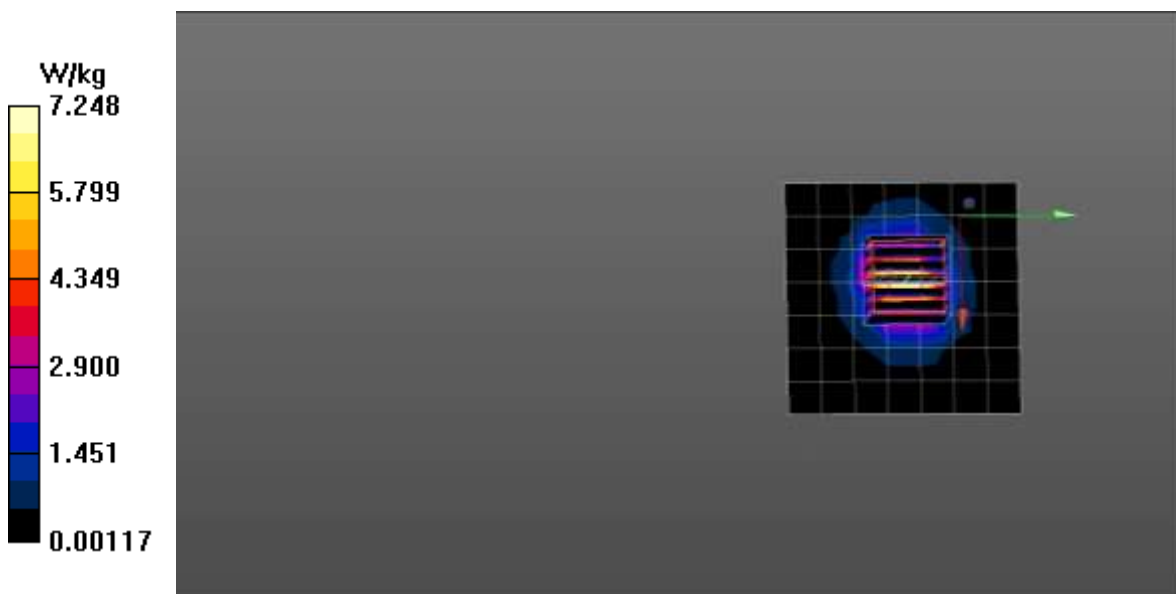

■ **Verification Data (5800 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 21.3 °C
Test Date: 04/26/2023


Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.199$ S/m; $\epsilon_r = 36.183$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7654; ConvF(5.35, 5.35, 5.35) @ 5800 MHz; Calibrated: 2022-05-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1254; Calibrated: 2022-06-15
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

5800MHz Head Verification/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 11.1 W/kg

5800MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 39.02 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 22.7 W/kg
SAR(1 g) = 4.32 W/kg; SAR(10 g) = 1.19 W/kg
Maximum value of SAR (measured) = 11.5 W/kg

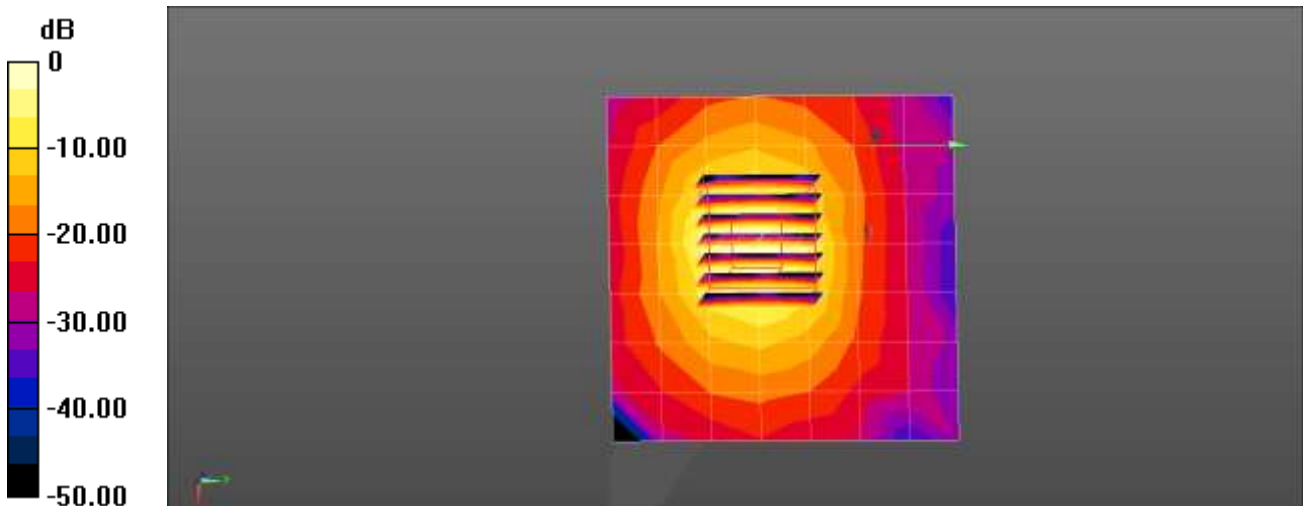

■ **Verification Data (5800 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.1 °C
Test Date: 05/10/2023


Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5800$ MHz; $\sigma = 5.123$ S/m; $\epsilon_r = 35.946$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3768; ConvF(4.75, 4.75, 4.75) @ 5800 MHz; Calibrated: 2022-06-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2022-08-17
- Phantom: ELI V4.0 Left-Left(20deg probe tilt); Type: QD OVA 001 Bx; Serial: xxxx
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

5800MHz Head Verification/Area Scan (7x8x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 9.35 W/kg

5800MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 45.41 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 17.5 W/kg
SAR(1 g) = 4.11 W/kg; SAR(10 g) = 1.24 W/kg
Maximum value of SAR (measured) = 10.1 W/kg

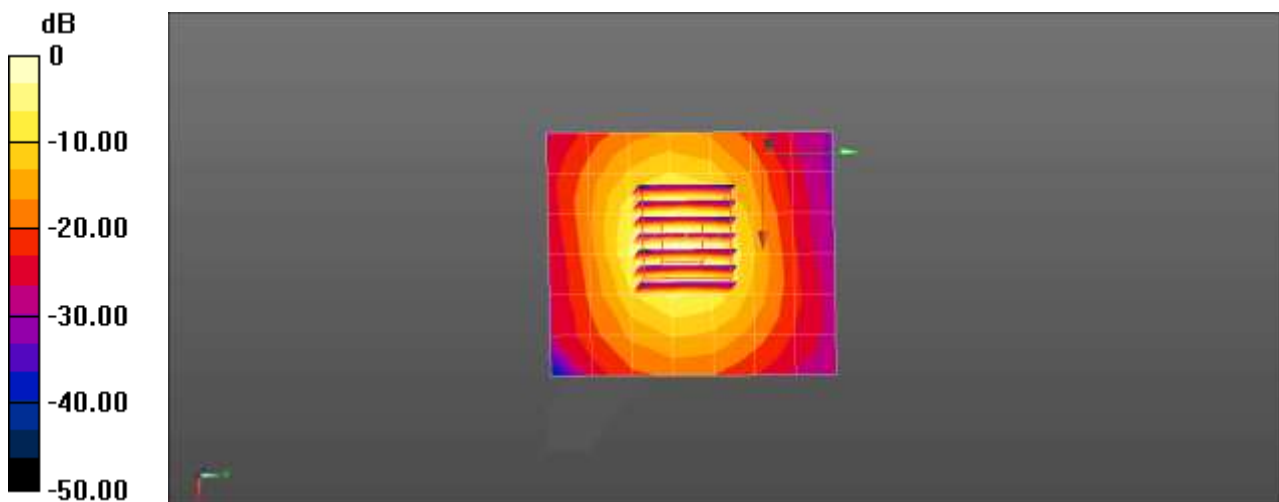

Appendix D. – SAR Tissue Characterization

The brain and muscle mixtures consist of a viscous gel using hydrox-ethyl cellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Harts grove.

Ingredients (% by weight)	Frequency (MHz)			
	2 450 – 2 700		3500 - 5 800	
Tissue Type	Head	Body	Head	Body
Water	71.88	73.2	65.52	78.66
Salt (NaCl)	0.16	0.1	0.0	0.0
Sugar	0.0	0.0	0.0	0.0
HEC	0.0	0.0	0.0	0.0
Bactericide	0.0	0.0	0.0	0.0
Triton X-100	19.97	0.0	17.24	10.67
DGBE	7.99	26.7	0.0	0.0
Diethylene glycol hexyl ether	-	-	-	-

Salt:	99 % Pure Sodium Chloride	Sugar:	98 % Pure Sucrose
Water:	De-ionized, 16M resistivity	HEC:	Hydroxyethyl Cellulose
DGBE:	99 % Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy) ethanol]		
Triton X-100(ultra-pure):	Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl] ether		

Composition of the Tissue Equivalent Matter

Appendix E. – SAR System Validation

Per FCC KCB 865664 D02v01r02, SAR system validation status should be document to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in IEEE 1528-2013 and FCC KDB 865664 D01v01r04. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

Probe	Probe Type	Probe Calibration Point		Dipole	Date	Dielectric Parameters		CW Validation			Modulation Validation		
						Measured Permittivity	Measured Conductivity	Sensitivity	Probe Linearity	Probe Isotropy	MOD. Type	Duty Factor	PAR
7654	EX3DV4	Head	2450	743	2022-06-28	39.2	1.83	PASS	PASS	PASS	OFDM	N/A	PASS
7654	EX3DV4	Head	5250	1253	2022-08-04	35.7	4.70	PASS	PASS	PASS	OFDM	N/A	PASS
7654	EX3DV4	Head	5600	1253	2022-08-04	35.3	5.05	PASS	PASS	PASS	OFDM	N/A	PASS
7654	EX3DV4	Head	5750	1253	2022-08-04	35.6	5.24	PASS	PASS	PASS	OFDM	N/A	PASS
7654	EX3DV4	Head	5800	1107	2022-08-04	35.6	5.24	PASS	PASS	PASS	OFDM	N/A	PASS
3768	EX3DV4	Head	5800	1107	2022-08-04	35.1	5.18	PASS	PASS	PASS	OFDM	N/A	PASS

SAR System Validation Summary 1g

Note;

All measurement were performed using probes calibrated for CW signal only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01r04. SAR system were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to KDB 865664 D01v01r04.